



TEST REPORT

Report No.: **CHTEW19120211** Report Verification: 

Project No.....: **SHT1912060301EW**

FCC ID.....: **T58WF2419D**

Applicant's name.....: **NETIS SYSTEMS CO., LTD.**

Address.....: Floor 8, Building B, TongFang Information Harbor, No.11
Langshan Road, Nanshan District, Shenzhen, China

Manufacturer.....: **NETIS SYSTEMS CO., LTD.**

Address.....: Floor 8, Building B, TongFang Information Harbor, No.11
Langshan Road, Nanshan District, Shenzhen, China

Test item description: **300Mbps Wireless N Router**

Trade Mark: netis

Model/Type reference.....: WF2419

Listed Model(s).....: 3001473

Standard: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample.....: Dec.20,2019

Date of testing.....: Dec.20,2019 ~ Dec.26,2019

Date of issue.....: Dec.27,2019

Result.....: **PASS**

Compiled by
(Position+Printed name+Signature): File administrator Yueming Li

Yueming Li

Supervised by
(Position+Printed name+Signature): Project Engineer Kiki Kong

Kiki Kong

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
6.	TEST SETUP PHOTOS	35
7.	EXTERANAL AND INTERNAL PHOTOS	37
8.	APPENDIX REPORT	41

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules
- [KDB662911 D01 Multiple Transmitter Output v02r01](#): Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
- [KDB662911 D02 MIMO with Cross-Polarized Antennas v01](#): MIMO with Cross-Polarized Antenna

1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-12-27	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247(b)(3)	PASS
5.4	Power Spectral Density	15.247(e)	PASS
5.5	6dB Bandwidth	15.247(a)(2)	PASS
5.6	99% Occupied Bandwidth	-	PASS ^{*1}
5.7	Duty cycle	-	PASS ^{*1}
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.9	Radiated Band Edge Emission	15.205/15.209	PASS
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	NETIS SYSTEMS CO., LTD.
Address:	Floor 8, Building B, TongFang Information Harbor, No.11 Langshan Road, Nanshan District, Shenzhen, China
Manufacturer:	NETIS SYSTEMS CO., LTD.
Address:	Floor 8, Building B, TongFang Information Harbor, No.11 Langshan Road, Nanshan District, Shenzhen, China

3.2. Product Description

Name of EUT:	300Mbps Wireless N Router
Trade Mark:	netis
Model No.:	WF2419
Listed Model(s):	3001473
Power supply:	AC 120V
Adapter information:	Mode:AMS195-0900500FU Input:100-240Va.c.50/60Hz 0.3A Output:9Vd.c.0.5A
Hardware version:	PB-7119-M02G-50
Software version:	V3.2.43177

3.3. Radio Specification Description

Support type ^{*2} :	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	External Antenna
Antenna gain:	5.00dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/802.11g/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
· :	· :	· :	· :
06	2437	06	2437
· :	· :	· :	· :
10	2457	08	2447
11	2462	09	2452

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX 142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2019/05/27	2020/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2017/03/27	2020/03/26
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
●	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

The product has two external antennas, both two are 5dBi antenna gain, and the product is a CDD device with the same gain, according to KDB 662911 D01 section F, the Directional gain=Gant + Array gain

For power spectral density measurements on all devices,


Array gain= $10\log(N_{ant}/N_{ss})$ dB, So the Directional gain= $5+10\log(2/2)=5$ dBi which is less than 6 dBi requirement.

For power measurements on IEEE 802.11 devices,

Array gain=0 dB for $N_{ant} \leq 4$,

So the Directional gain= $5+0=5$ dBi which is less than 6 dBi requirement, please refer to the below antenna photo.

1

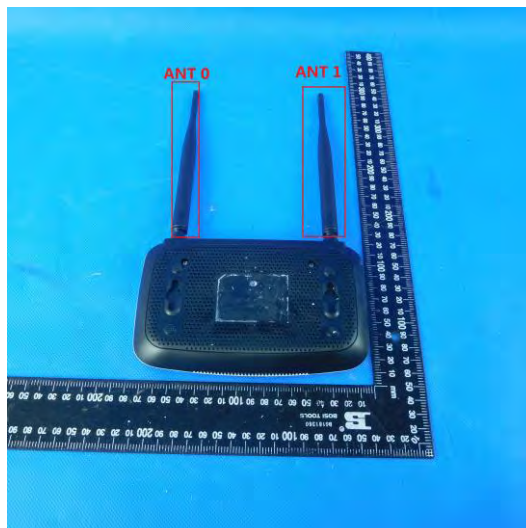

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

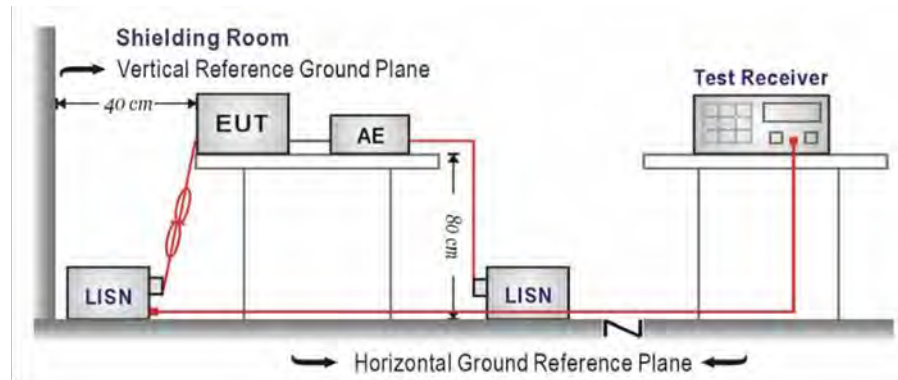

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

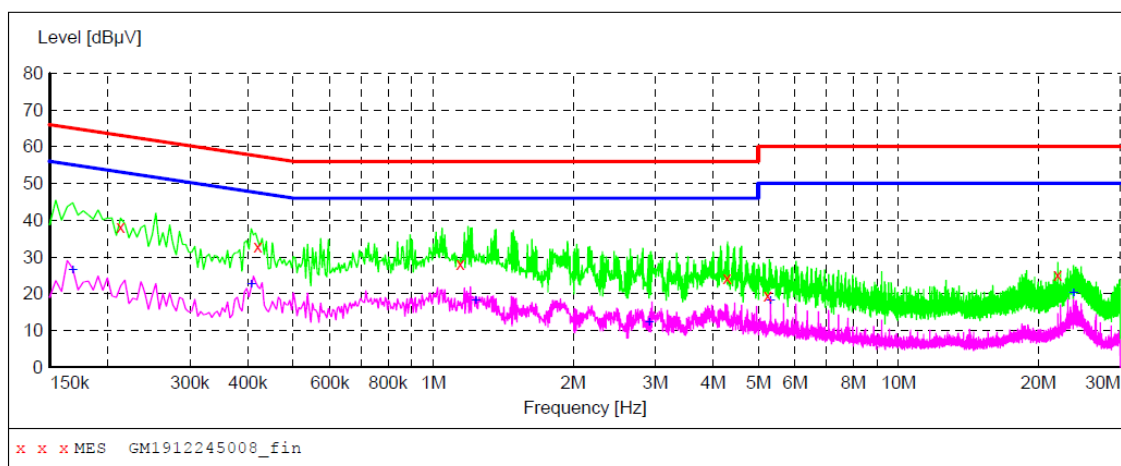**MEASUREMENT RESULT: "GM1912245008_fin"**

12/24/2019 9:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.213000	38.20	10.1	63	24.9	QP	L1	GND
0.420000	32.90	10.1	57	24.5	QP	L1	GND
1.144500	28.20	10.1	56	27.8	QP	L1	GND
4.285500	24.40	10.1	56	31.6	QP	L1	GND
5.239500	19.60	10.2	60	40.4	QP	L1	GND
21.997500	25.20	10.2	60	34.8	QP	L1	GND


MEASUREMENT RESULT: "GM1912245008_fin2"

12/24/2019 9:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	26.40	10.1	55	28.7	AV	L1	GND
0.406500	22.50	10.1	48	25.2	AV	L1	GND
1.234500	18.00	10.1	46	28.0	AV	L1	GND
2.913000	12.00	10.1	46	34.0	AV	L1	GND
5.307000	18.00	10.2	50	32.0	AV	L1	GND
23.793000	20.20	10.2	50	29.8	AV	L1	GND

Test Line:

N

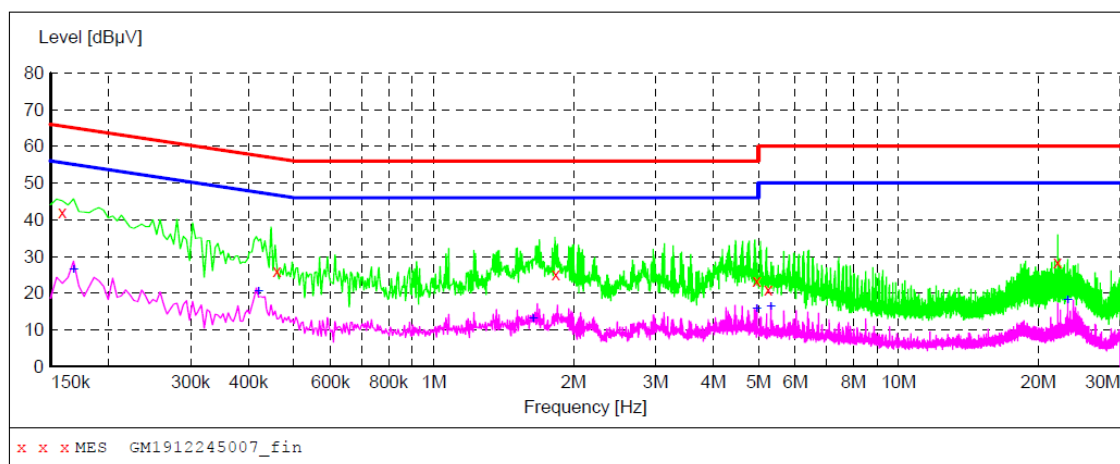**MEASUREMENT RESULT: "GM1912245007_fin"**

12/24/2019 9:32AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	42.00	10.1	66	23.5	QP	N	GND
0.460500	26.00	10.1	57	30.7	QP	N	GND
1.833000	25.20	10.1	56	30.8	QP	N	GND
4.951500	23.40	10.1	56	32.6	QP	N	GND
5.253000	21.00	10.2	60	39.0	QP	N	GND
21.997500	28.30	10.2	60	31.7	QP	N	GND

MEASUREMENT RESULT: "GM1912245007_fin2"

12/24/2019 9:32AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	26.20	10.1	55	28.9	AV	N	GND
0.420000	20.30	10.1	47	27.1	AV	N	GND
1.635000	13.00	10.1	46	33.0	AV	N	GND
4.956000	15.60	10.1	46	30.4	AV	N	GND
5.311500	16.20	10.2	50	33.8	AV	N	GND
23.127000	18.00	10.2	50	32.0	AV	N	GND

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

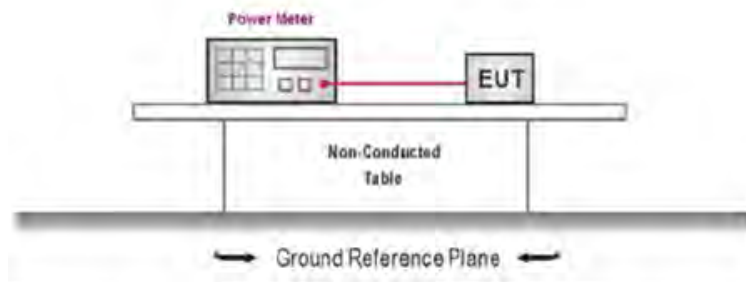

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix A on the appendix report


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

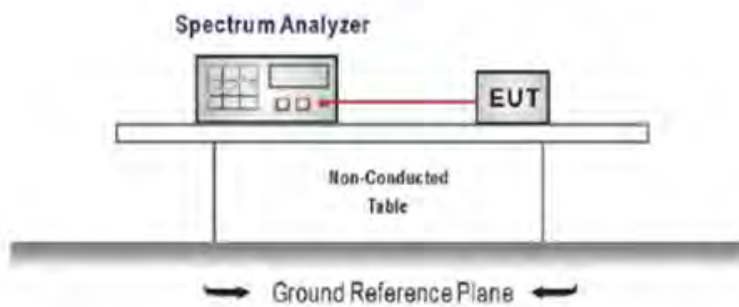

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data

Please refer to appendix B on the appendix report


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

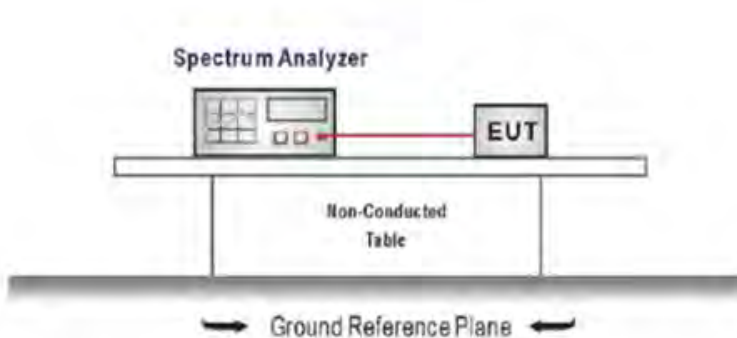

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency =DTS channel center frequency
Span=2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time= auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data


Please refer to appendix C on the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

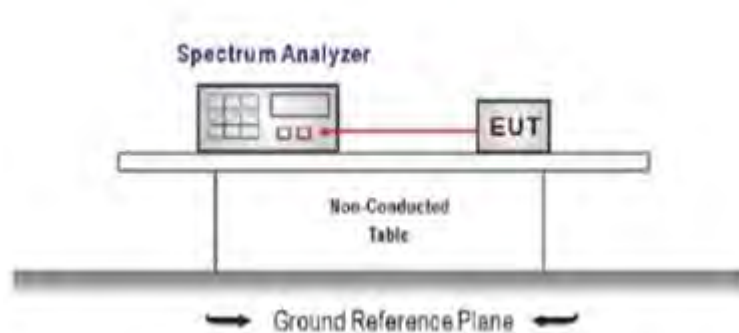

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST Data


Please refer to appendix D on the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION

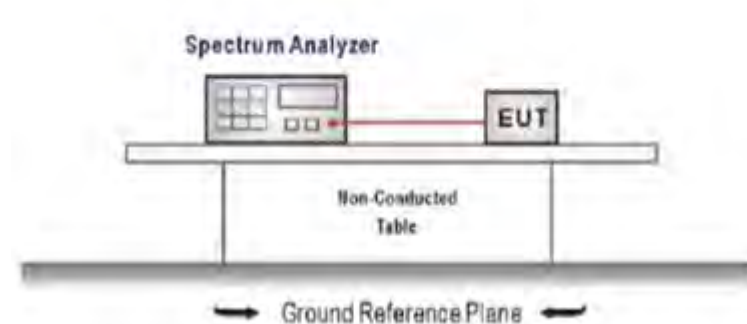

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE:

Please refer to the clause 4.2

TEST Data


Please refer to appendix E on the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

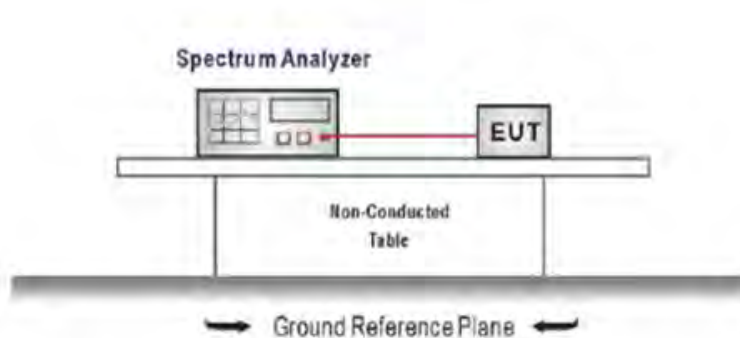

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST Data

Please refer to appendix F on the appendix report


5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

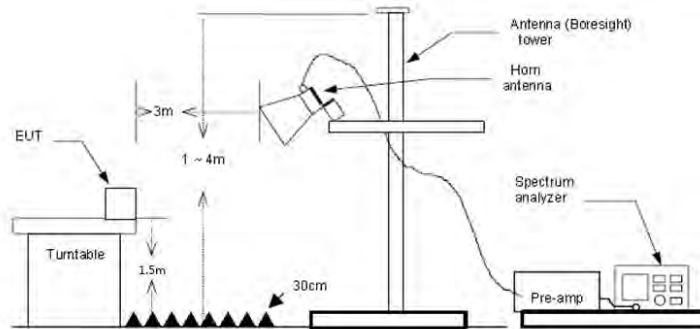

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Pre-scan all modulation mode and antenna. 802.11b/g in the report only displays the worst antenna information. The worst antenna is antenna 1.

Type	802.11b	Test channel	CH01	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	24.87	35.78	60.65	74.00	13.35	Horizontal	PK
2	2390.009	24.53	35.50	60.03	74.00	13.97	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.80	35.78	49.58	54.00	4.42	Horizontal	AV
2	2390.009	14.00	35.50	49.50	54.00	4.50	Horizontal	AV

Type	802.11b	Test channel	CH01	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	23.59	35.78	59.37	74.00	14.63	Vertical	PK
2	2390.009	24.50	35.50	60.00	74.00	14.00	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	14.01	35.78	49.79	54.00	4.21	Vertical	AV
2	2390.009	13.89	35.50	49.39	54.00	4.61	Vertical	AV

Type	802.11b	Test channel	CH11	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	24.64	35.31	59.95	74.00	14.05	Horizontal	PK
2	2500.000	24.13	35.28	59.41	74.00	14.59	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	14.02	35.31	49.33	54.00	4.67	Horizontal	AV
2	2500.000	14.20	35.28	49.48	54.00	4.52	Horizontal	AV

Type	802.11b	Test channel	CH11	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	24.76	35.31	60.07	74.00	13.93	Vertical	PK
2	2500.000	24.04	35.28	59.32	74.00	14.68	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	14.05	35.31	49.36	54.00	4.64	Vertical	AV
2	2500.000	14.19	35.28	49.47	54.00	4.53	Vertical	AV

Type	802.11g	Test channel	CH01	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	23.70	35.78	59.48	74.00	14.52	Horizontal	PK
2	2390.009	23.48	35.50	58.98	74.00	15.02	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.90	35.78	49.68	54.00	4.32	Horizontal	AV
2	2390.009	14.12	35.50	49.62	54.00	4.38	Horizontal	AV

Type	802.11g	Test channel	CH01	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	24.49	35.78	60.27	74.00	13.73	Vertical	PK
2	2390.009	24.44	35.50	59.94	74.00	14.06	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.86	35.78	49.64	54.00	4.36	Vertical	AV
2	2390.009	14.17	35.50	49.67	54.00	4.33	Vertical	AV

Type	802.11g	Test channel	CH11	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	25.48	35.31	60.79	74.00	13.21	Horizontal	PK
2	2500.000	23.66	35.28	58.94	74.00	15.06	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	14.36	35.31	49.67	54.00	4.33	Horizontal	AV
2	2500.000	14.12	35.28	49.40	54.00	4.60	Horizontal	AV

Type	802.11g	Test channel	CH11	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	24.87	35.31	60.18	74.00	13.82	Vertical	PK
2	2500.000	24.73	35.28	60.01	74.00	13.99	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	14.23	35.31	49.54	54.00	4.46	Vertical	AV
2	2500.000	14.17	35.28	49.45	54.00	4.55	Vertical	AV

Type	802.11n(HT20)	Test channel	CH01	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	24.77	35.78	60.55	74.00	13.45	Horizontal	PK
2	2390.116	26.30	35.50	61.80	74.00	12.20	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.72	35.78	49.50	54.00	4.50	Horizontal	AV
2	2390.116	14.27	35.50	49.77	54.00	4.23	Horizontal	AV

Type	802.11n(HT20)	Test channel	CH01	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	23.89	35.78	59.67	74.00	14.33	Vertical	PK
2	2390.116	23.11	35.50	58.61	74.00	15.39	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.78	35.78	49.56	54.00	4.44	Vertical	AV
2	2390.116	14.12	35.50	49.62	54.00	4.38	Vertical	AV

Type	802.11n(HT20)	Test channel	CH11	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	24.51	35.31	59.82	74.00	14.18	Horizontal	PK
2	2500.000	25.78	35.28	61.06	74.00	12.94	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	13.98	35.31	49.29	54.00	4.71	Horizontal	AV
2	2500.000	14.08	35.28	49.36	54.00	4.64	Horizontal	AV

Type	802.11n(HT20)	Test channel	CH11	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	24.65	35.31	59.96	74.00	14.04	Vertical	PK
2	2500.000	25.17	35.28	60.45	74.00	13.55	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.514	14.03	35.31	49.34	54.00	4.66	Vertical	AV
2	2500.000	13.96	35.28	49.24	54.00	4.76	Vertical	AV

Type	802.11n(HT40)	Test channel	CH03	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	23.86	35.78	59.64	74.00	14.36	Horizontal	PK
2	2390.108	23.88	35.50	59.38	74.00	14.62	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.98	35.78	49.76	54.00	4.24	Horizontal	AV
2	2390.108	13.91	35.50	49.41	54.00	4.59	Horizontal	AV

Type	802.11n(HT40)	Test channel	CH03	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	24.37	35.78	60.15	74.00	13.85	Vertical	PK
2	2390.108	24.33	35.50	59.83	74.00	14.17	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2310.000	13.80	35.78	49.58	54.00	4.42	Vertical	AV
2	2390.108	14.21	35.50	49.71	54.00	4.29	Vertical	AV

Type	802.11n(HT40)	Test channel	CH09	Polarity	Horizontal			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.500	24.39	35.31	59.70	74.00	14.30	Horizontal	PK
2	2500.000	24.38	35.28	59.66	74.00	14.34	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.500	14.14	35.31	49.45	54.00	4.55	Horizontal	AV
2	2500.000	14.03	35.28	49.31	54.00	4.69	Horizontal	AV

Type	802.11n(HT40)	Test channel	CH09	Polarity	Vertical			
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.500	24.98	35.31	60.29	74.00	13.71	Vertical	PK
2	2500.000	24.59	35.28	59.87	74.00	14.13	Vertical	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	2483.500	13.95	35.31	49.26	54.00	4.74	Vertical	AV
2	2500.000	14.29	35.28	49.57	54.00	4.43	Vertical	AV

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + $40 \cdot \log(300/3)$ = Limit dBuV/m @300m + 80,

Limit dBuV/m @3m = Limit dBuV/m @30m + $40 \cdot \log(30/3)$ = Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


➤ 9 kHz ~ 30 MHz

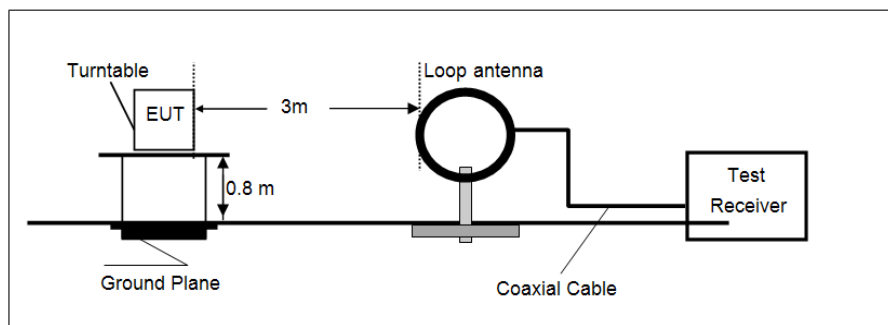

➤ 30 MHz ~ 1 GHz

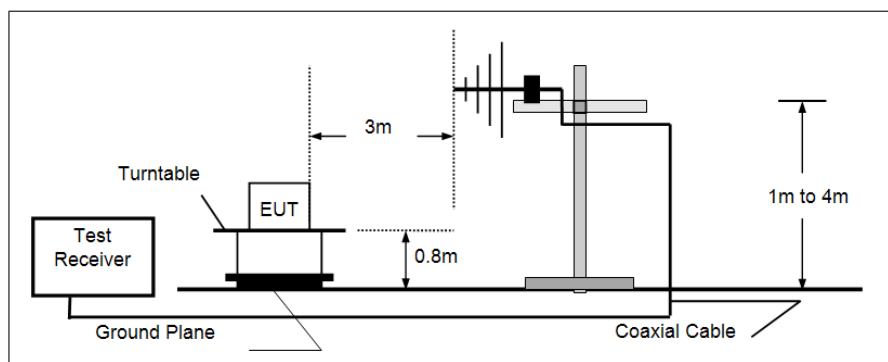

➤ Above 1 GHz

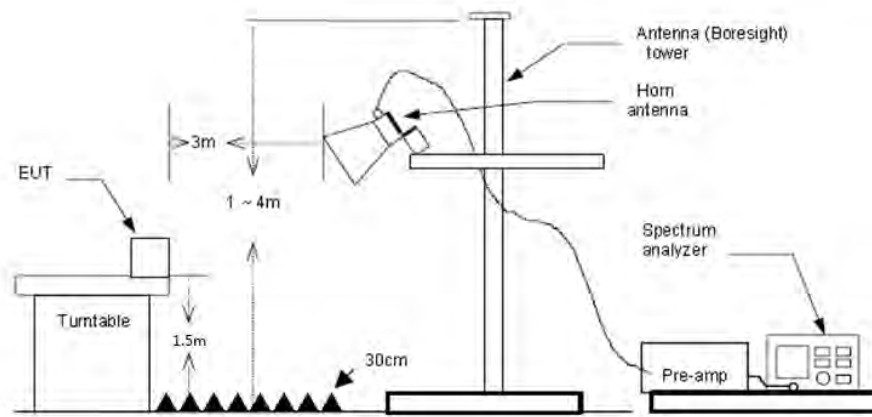

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

TEST DATA FOR 9 kHz ~ 30 MHz

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz


The EUT was pre-scanned all modulation mode and antenna, found CH06 of 802.11n(HT20) which it was worst case, so only show the worst case's data on this report.

TEST DATA FOR 1 GHz ~ 25 GHz

The EUT was pre-scanned all modulation mode and antenna. 802.11b/g in the report only displays the worst antenna information. The worst antenna is antenna 1.

Polarization:

Horizontal

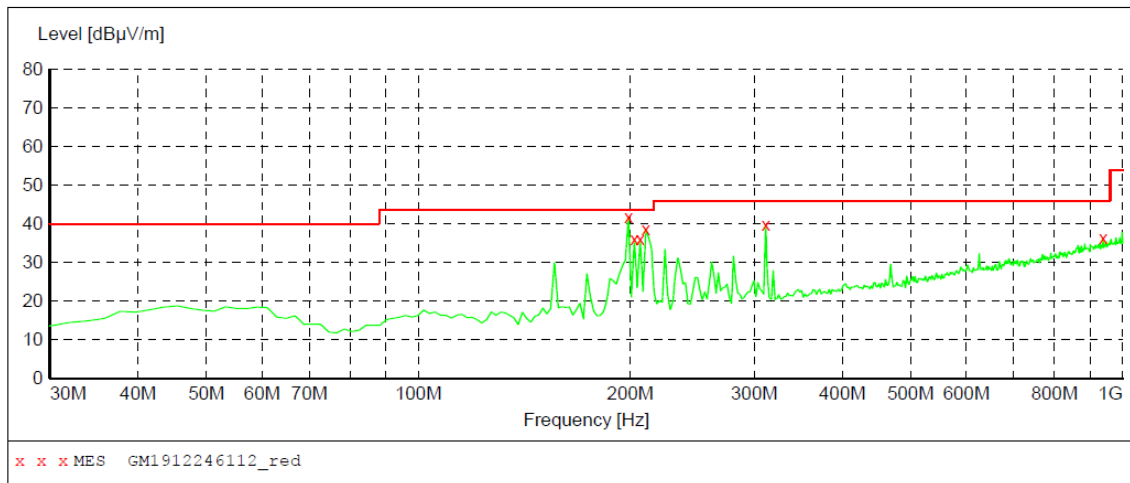
**MEASUREMENT RESULT: "GM1912246112_red"**

12/24/2019 11:13PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
198.780000	41.70	-9.0	43.5	1.8	QP	100.0	216.00	HORIZONTAL
202.660000	36.00	-9.5	43.5	7.5	QP	100.0	304.00	HORIZONTAL
206.540000	36.00	-9.9	43.5	7.5	QP	100.0	66.00	HORIZONTAL
210.420000	38.80	-9.9	43.5	4.7	QP	100.0	3.00	HORIZONTAL
311.300000	39.70	-6.3	46.0	6.3	QP	100.0	216.00	HORIZONTAL
937.920000	36.30	7.9	46.0	9.7	QP	100.0	3.00	HORIZONTAL

Polarization:

Vertical

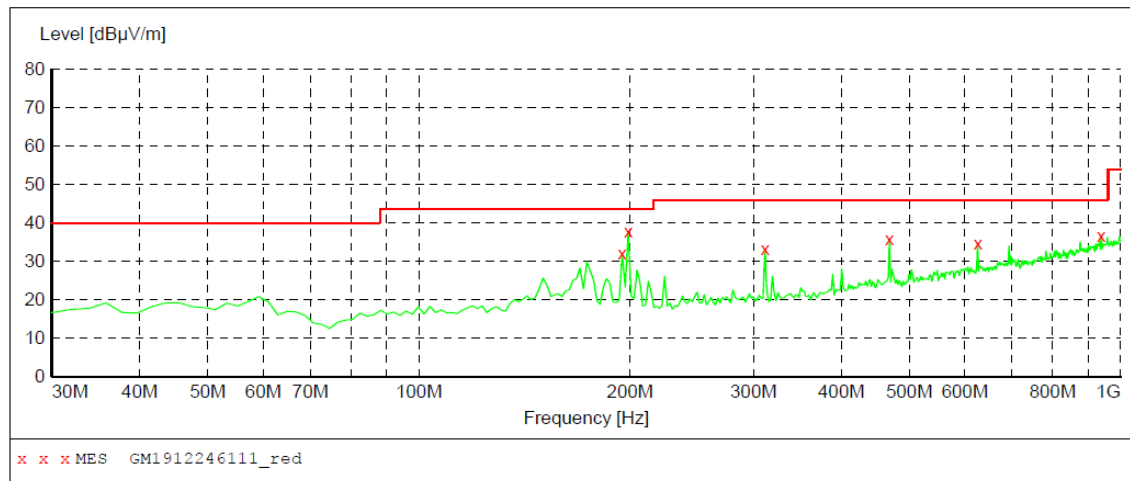**MEASUREMENT RESULT: "GM1912246111_red"**

12/24/2019 11:09PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
194.900000	32.00	-9.4	43.5	11.5	QP	100.0	118.00	VERTICAL
198.780000	37.80	-9.0	43.5	5.7	QP	100.0	193.00	VERTICAL
311.300000	33.30	-6.3	46.0	12.7	QP	100.0	301.00	VERTICAL
468.440000	35.90	-2.3	46.0	10.1	QP	100.0	0.00	VERTICAL
625.580000	34.70	2.0	46.0	11.3	QP	100.0	325.00	VERTICAL
937.920000	36.80	7.9	46.0	9.2	QP	100.0	263.00	VERTICAL

TEST DATA FOR 1 GHz ~ 25 GHz

Type		802.11b			Test channel		CH01	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1149.812	35.44	-6.36	29.08	74.00	44.92	Horizontal	PK
2	2998.968	40.56	-0.11	40.45	74.00	33.55	Horizontal	PK
3	5068.437	32.11	8.50	40.61	74.00	33.39	Horizontal	PK
4	7324.437	31.20	15.13	46.33	74.00	27.67	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1185.062	34.57	-5.99	28.58	74.00	45.42	Vertical	PK
2	3266.281	39.05	0.05	39.10	74.00	34.90	Vertical	PK
3	5039.062	30.77	8.22	38.99	74.00	35.01	Vertical	PK
4	7085.031	32.27	14.39	46.66	74.00	27.34	Vertical	PK

Type		802.11b			Test channel		CH06	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1190.937	34.80	-5.93	28.87	74.00	45.13	Horizontal	PK
2	3006.312	36.57	-0.09	36.48	74.00	37.52	Horizontal	PK
3	5087.531	31.15	8.68	39.83	74.00	34.17	Horizontal	PK
4	6703.156	31.73	13.46	45.19	74.00	28.81	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1185.062	35.50	-5.99	29.51	74.00	44.49	Vertical	PK
2	3142.906	38.74	0.54	39.28	74.00	34.72	Vertical	PK
3	4989.125	31.36	7.78	39.14	74.00	34.86	Vertical	PK
4	6863.250	31.61	13.77	45.38	74.00	28.62	Vertical	PK

Type		802.11b			Test channel		CH11	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1264.375	35.02	-5.66	29.36	74.00	44.64	Horizontal	PK
2	2957.843	36.47	0.12	36.59	74.00	37.41	Horizontal	PK
3	4652.781	31.78	6.09	37.87	74.00	36.13	Horizontal	PK
4	7168.750	30.74	14.82	45.56	74.00	28.44	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1193.875	35.33	-5.89	29.44	74.00	44.56	Vertical	PK
2	3197.250	37.86	0.83	38.69	74.00	35.31	Vertical	PK
3	4989.125	31.48	7.78	39.26	74.00	34.74	Vertical	PK
4	7080.625	31.42	14.38	45.80	74.00	28.20	Vertical	PK

Type		802.11g			Test channel		CH01	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1207.093	34.41	-5.81	28.60	74.00	45.40	Horizontal	PK
2	2985.750	38.67	-0.04	38.63	74.00	35.37	Horizontal	PK
3	4705.656	31.48	6.42	37.90	74.00	36.10	Horizontal	PK
4	7065.937	31.77	14.34	46.11	74.00	27.89	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1232.062	34.90	-5.75	29.15	74.00	44.85	Vertical	PK
2	3204.593	38.60	0.79	39.39	74.00	34.61	Vertical	PK
3	4787.906	30.76	6.97	37.73	74.00	36.27	Vertical	PK
4	7465.437	31.77	15.40	47.17	74.00	26.83	Vertical	PK

Type		802.11g			Test channel		CH06	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1301.093	34.65	-5.57	29.08	74.00	44.92	Horizontal	PK
2	2991.625	37.36	-0.07	37.29	74.00	36.71	Horizontal	PK
3	4776.156	31.72	6.89	38.61	74.00	35.39	Horizontal	PK
4	7513.906	32.99	15.47	48.46	74.00	25.54	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1174.781	36.06	-6.10	29.96	74.00	44.04	Vertical	PK
2	3238.375	39.04	0.38	39.42	74.00	34.58	Vertical	PK
3	5000.875	31.52	7.86	39.38	74.00	34.62	Vertical	PK
4	7083.562	31.60	14.39	45.99	74.00	28.01	Vertical	PK

Type		802.11g			Test channel		CH11	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1304.031	34.69	-5.57	29.12	74.00	44.88	Horizontal	PK
2	3201.656	35.56	0.82	36.38	74.00	37.62	Horizontal	PK
3	4893.656	31.12	7.17	38.29	74.00	35.71	Horizontal	PK
4	7406.687	30.44	15.37	45.81	74.00	28.19	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1168.906	34.71	-6.16	28.55	74.00	45.45	Vertical	PK
2	3178.156	37.97	0.73	38.70	74.00	35.30	Vertical	PK
3	4997.937	31.81	7.84	39.65	74.00	34.35	Vertical	PK
4	6682.593	31.99	13.41	45.40	74.00	28.60	Vertical	PK

Type		802.11n(HT20)			Test channel		CH01	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1236.468	33.76	-5.74	28.02	74.00	45.98	Horizontal	PK
2	3150.250	36.25	0.58	36.83	74.00	37.17	Horizontal	PK
3	4511.781	31.77	5.40	37.17	74.00	36.83	Horizontal	PK
4	5901.218	31.25	9.99	41.24	74.00	32.76	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1240.875	34.03	-5.72	28.31	74.00	45.69	Vertical	PK
2	3192.843	37.72	0.80	38.52	74.00	35.48	Vertical	PK
3	4883.375	30.53	7.16	37.69	74.00	36.31	Vertical	PK
4	6660.562	31.29	13.34	44.63	74.00	29.37	Vertical	PK

Type		802.11n(HT20)			Test channel		CH06	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1207.093	35.73	-5.81	29.92	74.00	44.08	Horizontal	PK
2	3198.718	35.77	0.83	36.60	74.00	37.40	Horizontal	PK
3	4995.000	31.43	7.82	39.25	74.00	34.75	Horizontal	PK
4	7503.625	31.26	15.43	46.69	74.00	27.31	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1171.843	35.98	-6.13	29.85	74.00	44.15	Vertical	PK
2	3195.781	38.01	0.82	38.83	74.00	35.17	Vertical	PK
3	4705.656	31.13	6.42	37.55	74.00	36.45	Vertical	PK
4	6647.343	31.23	13.30	44.53	74.00	29.47	Vertical	PK

Type		802.11n(HT20)			Test channel		CH11	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1207.093	34.15	-5.81	28.34	74.00	45.66	Horizontal	PK
2	3092.968	35.85	0.29	36.14	74.00	37.86	Horizontal	PK
3	4999.406	32.27	7.85	40.12	74.00	33.88	Horizontal	PK
4	7562.375	31.31	15.70	47.01	74.00	26.99	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1168.906	34.78	-6.16	28.62	74.00	45.38	Vertical	PK
2	2987.218	40.40	-0.05	40.35	74.00	33.65	Vertical	PK
3	4799.656	30.45	7.05	37.50	74.00	36.50	Vertical	PK
4	6801.562	31.30	13.21	44.51	74.00	29.49	Vertical	PK

Type	802.11n(HT40)				Test channel		CH03	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1152.750	35.58	-6.33	29.25	74.00	44.75	Horizontal	PK
2	3120.875	38.04	0.43	38.47	74.00	35.53	Horizontal	PK
3	4892.187	31.31	7.17	38.48	74.00	35.52	Horizontal	PK
4	6914.656	31.32	14.11	45.43	74.00	28.57	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1116.031	35.84	-6.72	29.12	74.00	44.88	Vertical	PK
2	3175.218	38.11	0.71	38.82	74.00	35.18	Vertical	PK
3	4986.187	31.51	7.76	39.27	74.00	34.73	Vertical	PK
4	7440.468	31.64	15.39	47.03	74.00	26.97	Vertical	PK

Type	802.11n(HT40)				Test channel		CH06	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1208.562	34.08	-5.81	28.27	74.00	45.73	Horizontal	PK
2	3122.343	35.68	0.44	36.12	74.00	37.88	Horizontal	PK
3	4990.593	32.43	7.79	40.22	74.00	33.78	Horizontal	PK
4	7493.343	32.05	15.41	47.46	74.00	26.54	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1183.593	34.73	-6.00	28.73	74.00	45.27	Vertical	PK
2	3198.718	38.04	0.83	38.87	74.00	35.13	Vertical	PK
3	4795.250	30.79	7.02	37.81	74.00	36.19	Vertical	PK
4	6647.343	31.29	13.30	44.59	74.00	29.41	Vertical	PK

Type	802.11n(HT40)				Test channel		CH09	
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1164.500	35.31	-6.21	29.10	74.00	44.90	Horizontal	PK
2	3122.343	36.04	0.44	36.48	74.00	37.52	Horizontal	PK
3	4865.750	30.87	7.14	38.01	74.00	35.99	Horizontal	PK
4	6606.218	30.93	13.17	44.10	74.00	29.90	Horizontal	PK
Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1	1182.125	34.94	-6.02	28.92	74.00	45.08	Vertical	PK
2	3053.312	37.99	0.11	38.10	74.00	35.90	Vertical	PK
3	4977.375	31.53	7.70	39.23	74.00	34.77	Vertical	PK
4	6625.312	31.22	13.23	44.45	74.00	29.55	Vertical	PK

6. TEST SETUP PHOTOS

Radiated Emission




AC Conducted Emission




7. EXTERANAL AND INTERNAL PHOTOS



External Photo





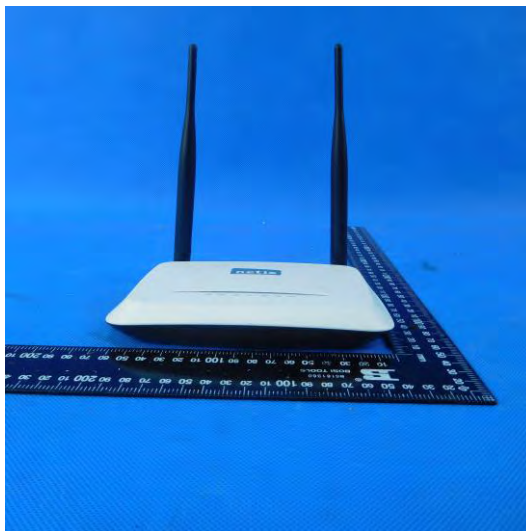

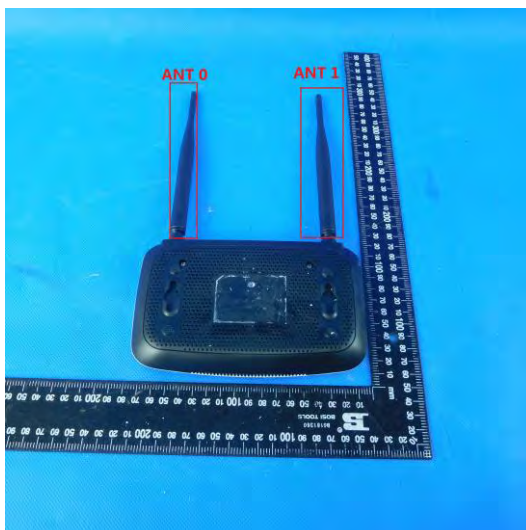


Internal Photo

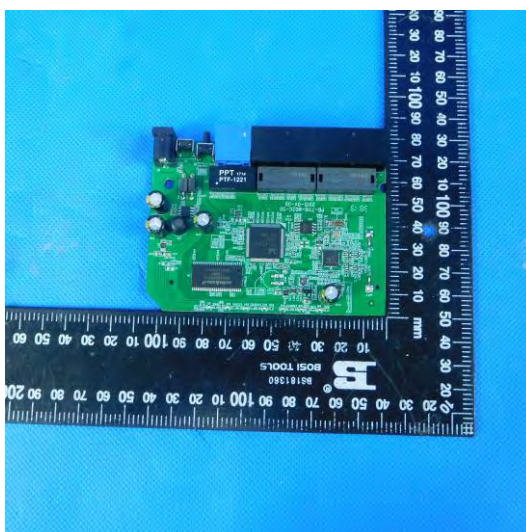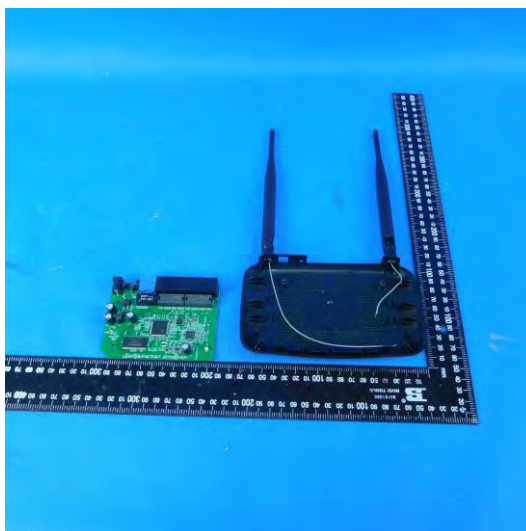

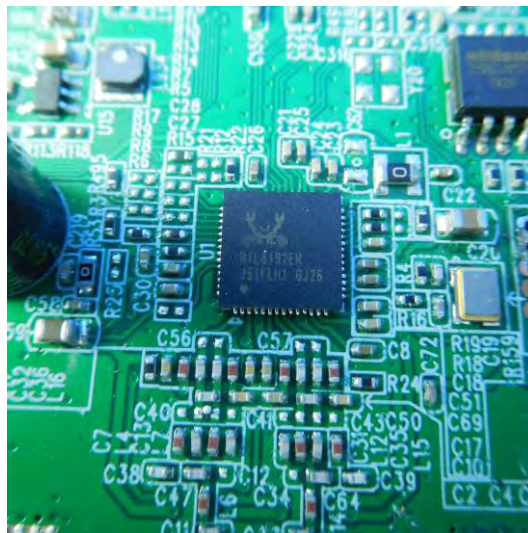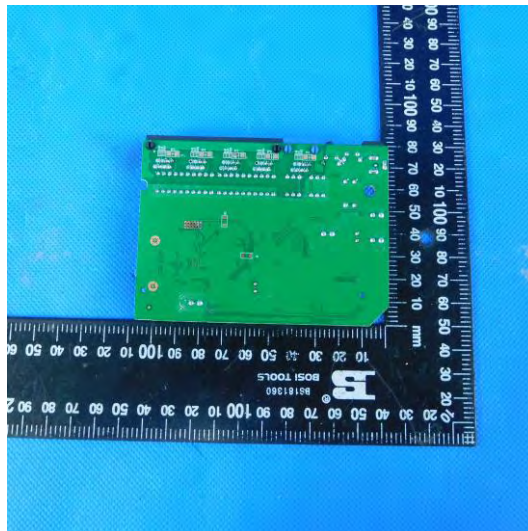

APPENDIX REPORT

Project No.	SHT1912060301EW	Radio Specification	WIFI 2.4G
Test sample No.	YPHT19120603005	Model No.	WF2419
Start test date	2019/9/11	Finish date	2019/9/11
Temperature	25°C	Humidity	50%
Test Engineer	Ximing.Huang	Auditor	


Appendix clause	Test item	Result
A	Conducted Peak Output Power	PASS
B	Power Spectral Density	PASS
C	6 dB Bandwidth	PASS
D	99% Bandwidth	PASS
E	Duty Cycle	PASS
F	Band edge and Spurious Emissions(coducted)	PASS


Appendix A: Conducted Peak Output Power


Type	Channel	Output power (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Antenna 0	Antenna 1			
802.11b	01	19.76	20.46	---	≤30.00	Pass
	06	19.60	21.32	---		
	11	19.49	20.37	---		
802.11g	01	19.81	19.48	---	≤30.00	Pass
	06	19.80	19.46	---		
	11	19.70	19.29	---		
802.11n(HT20)	01	19.97	19.62	22.81	≤30.00	Pass
	06	20.03	19.66	22.86		
	11	19.85	19.43	22.67		
802.11n(HT40)	03	18.88	19.85	22.44	≤30.00	Pass
	06	18.81	19.76	22.34		
	09	18.78	19.63	22.23		


Appendix B: Power Spectral Density


Type	Channel	Power Spectral Density (dBm/30KHz)		Total Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
		Antenna 0	Antenna 1			
802.11b	01	0.90	1.72	---	≤8.00	Pass
	06	0.88	1.70	---		
	11	0.77	1.55	---		
802.11g	01	-5.64	-5.98	---	≤8.00	Pass
	06	-5.56	-5.97	---		
	11	-5.65	-6.21	---		
802.11n(HT20)	01	-5.09	-5.38	-2.22	≤8.00	Pass
	06	-4.93	-5.35	-2.12		
	11	-5.03	-5.58	-2.29		
802.11n(HT40)	03	-9.51	-8.75	-6.07	≤8.00	Pass
	06	-9.45	-8.78	-6.09		
	09	-9.53	-8.69	-6.08		

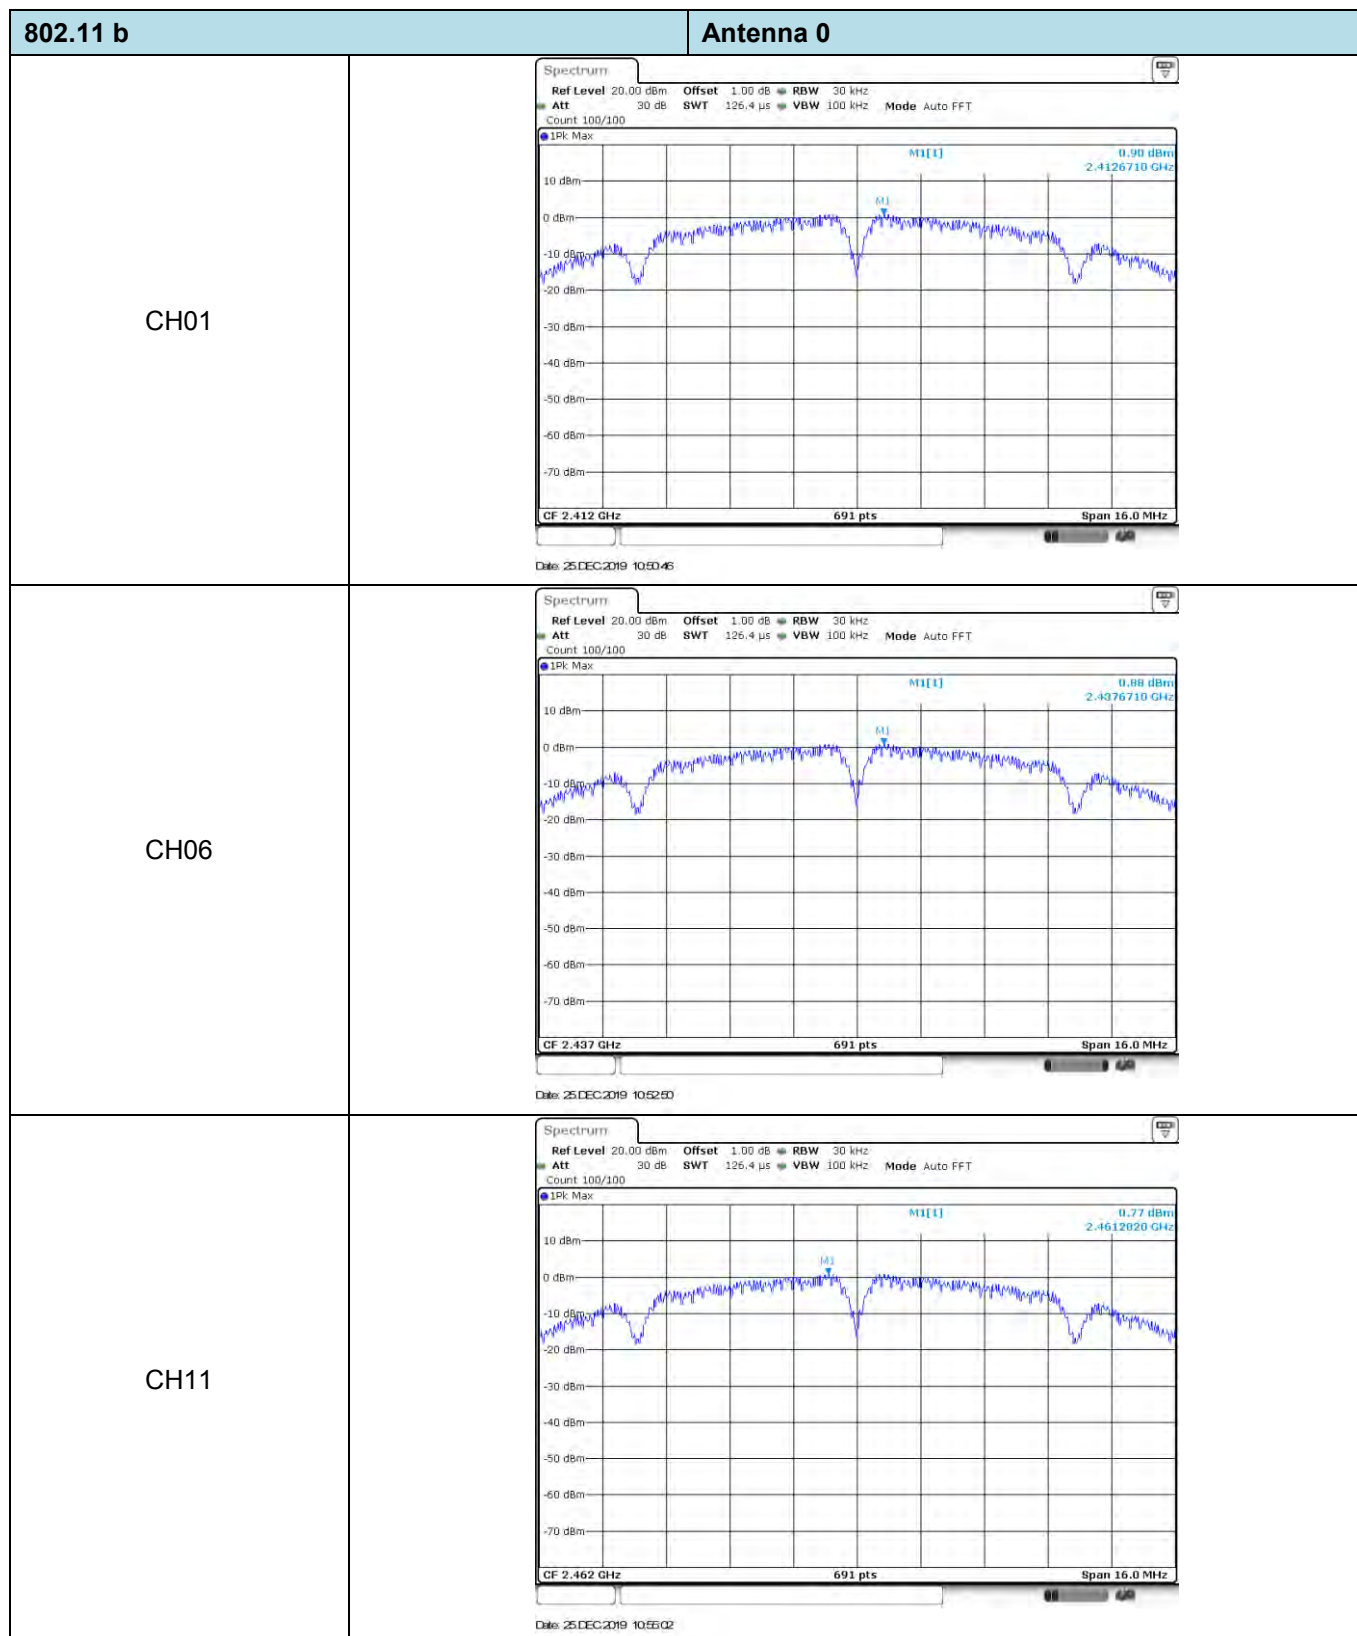




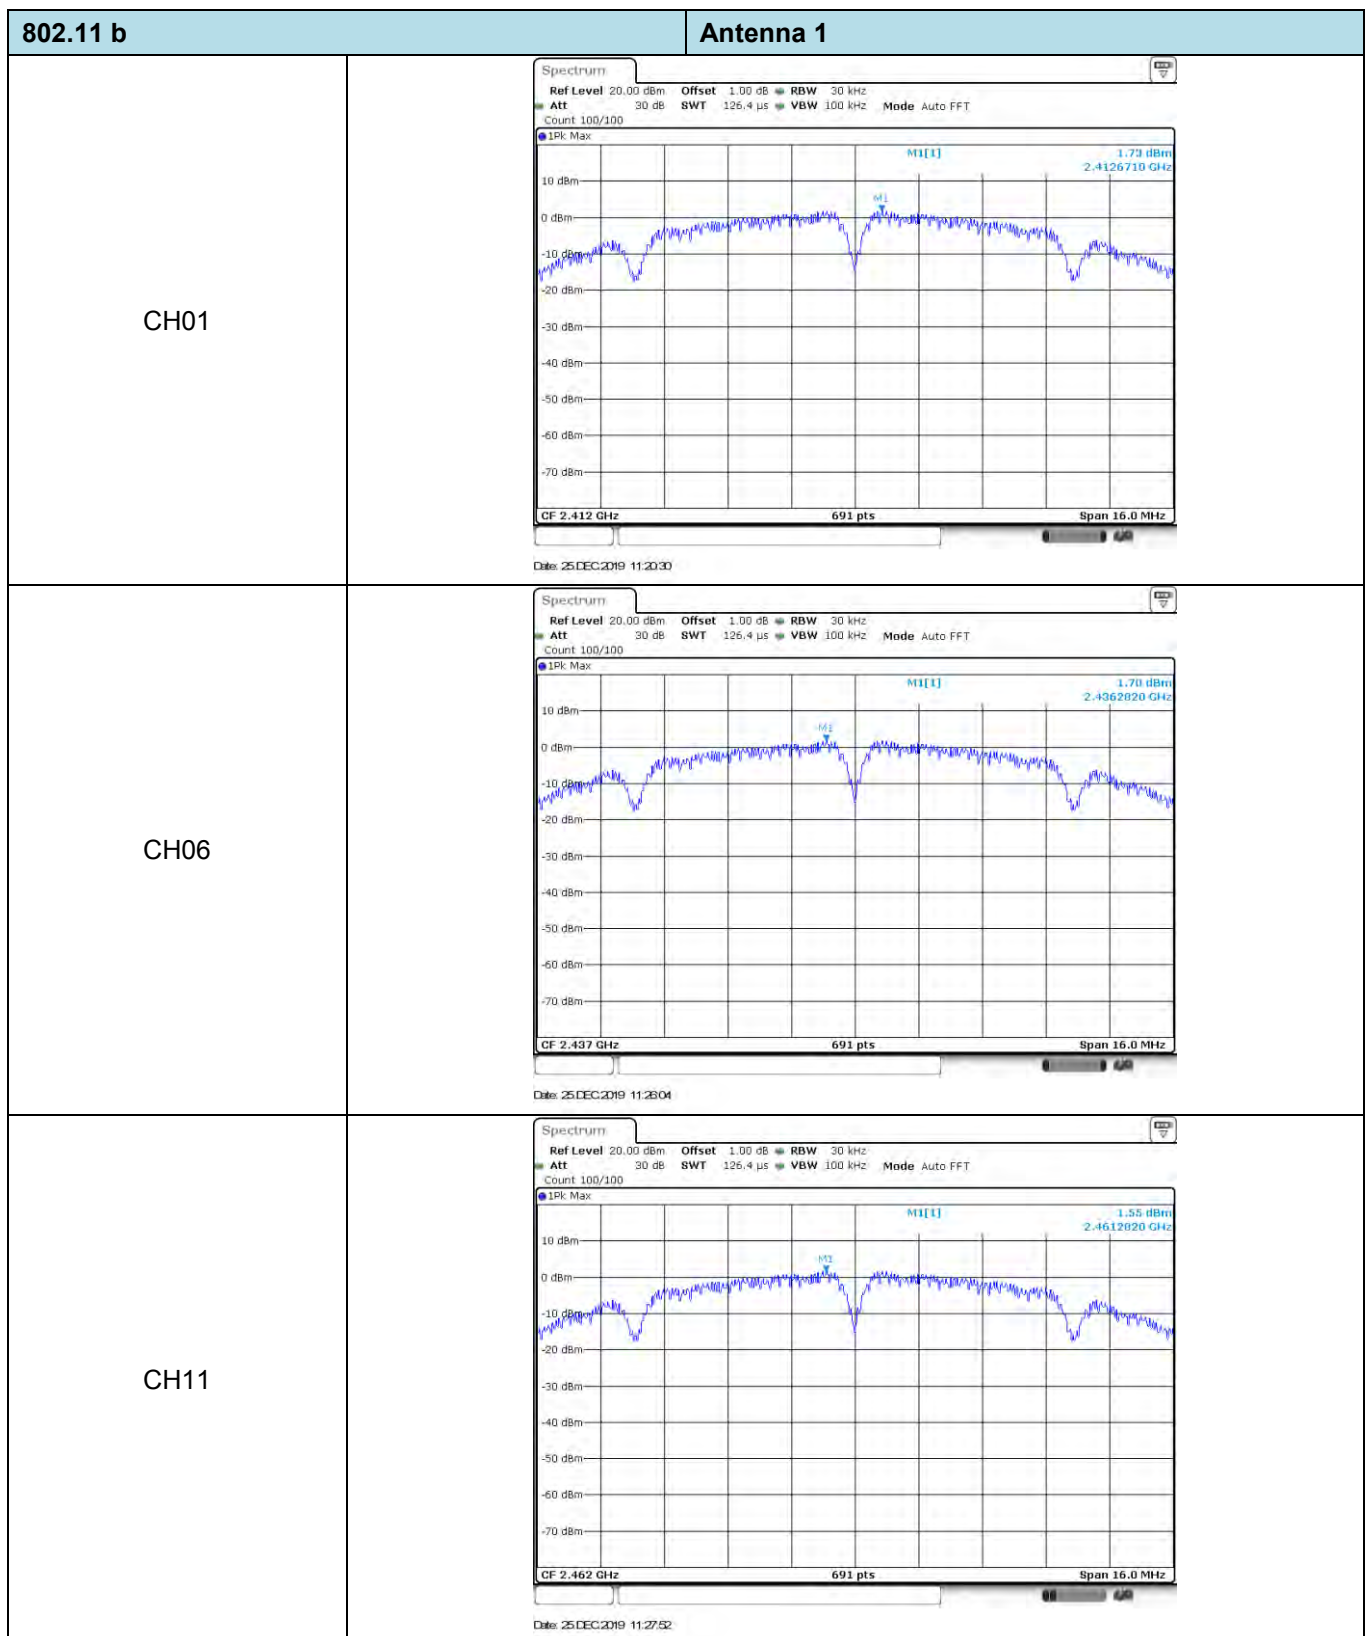




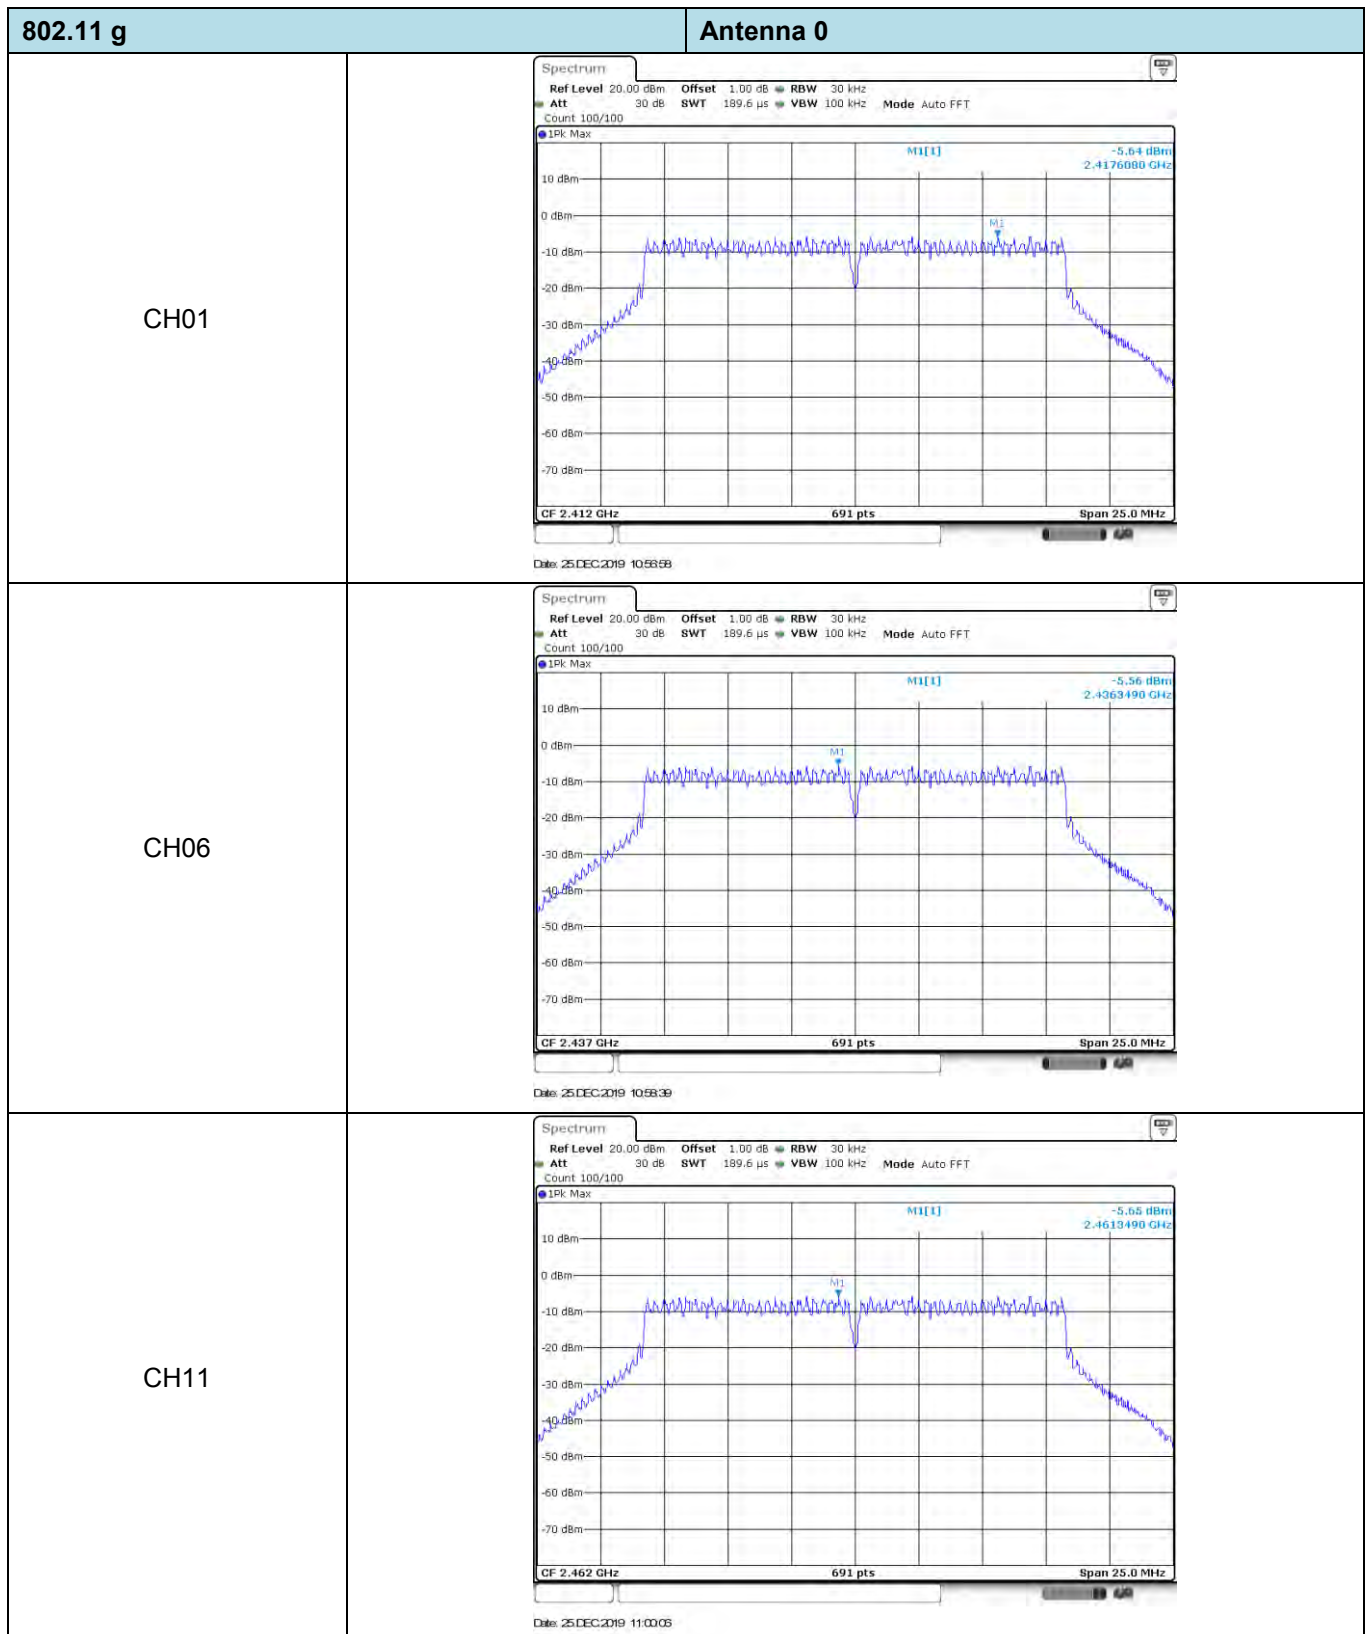


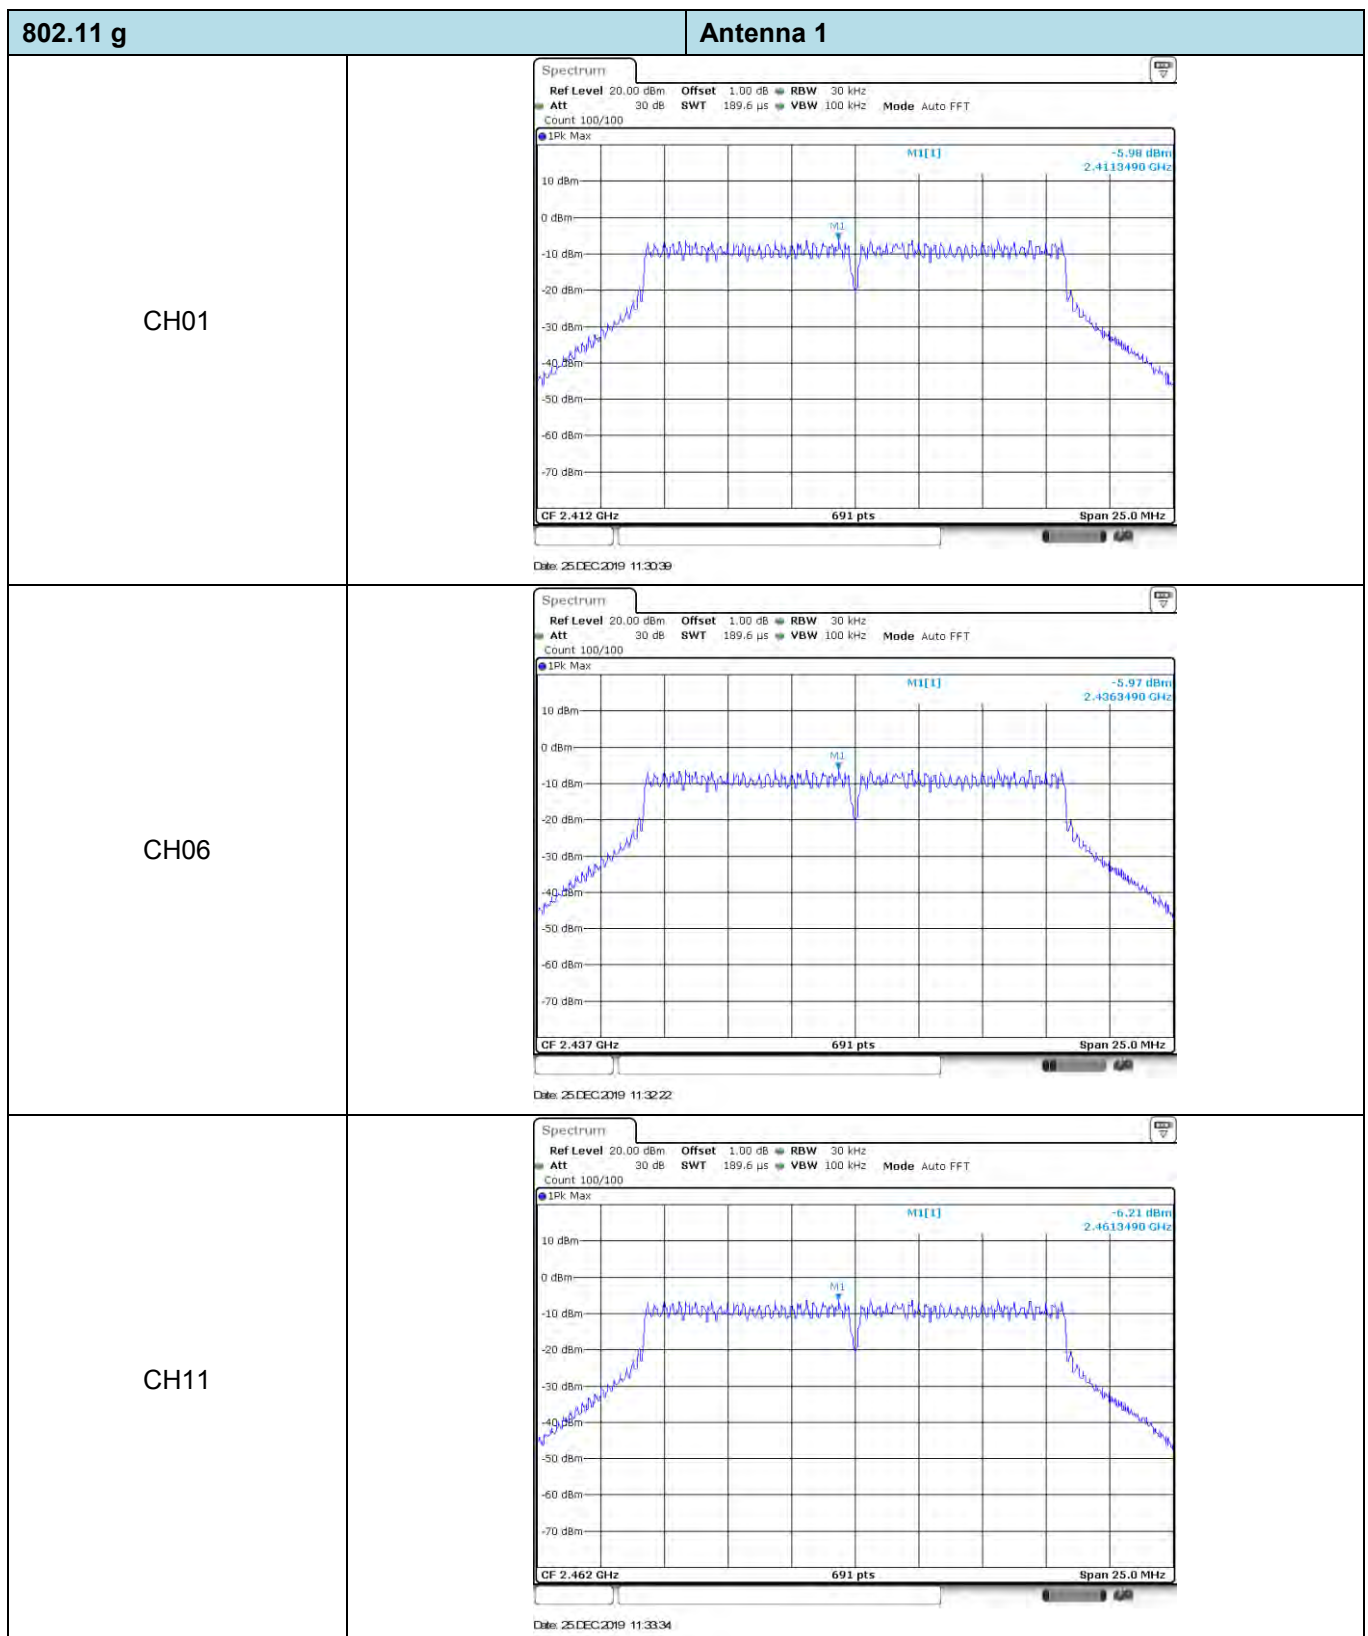

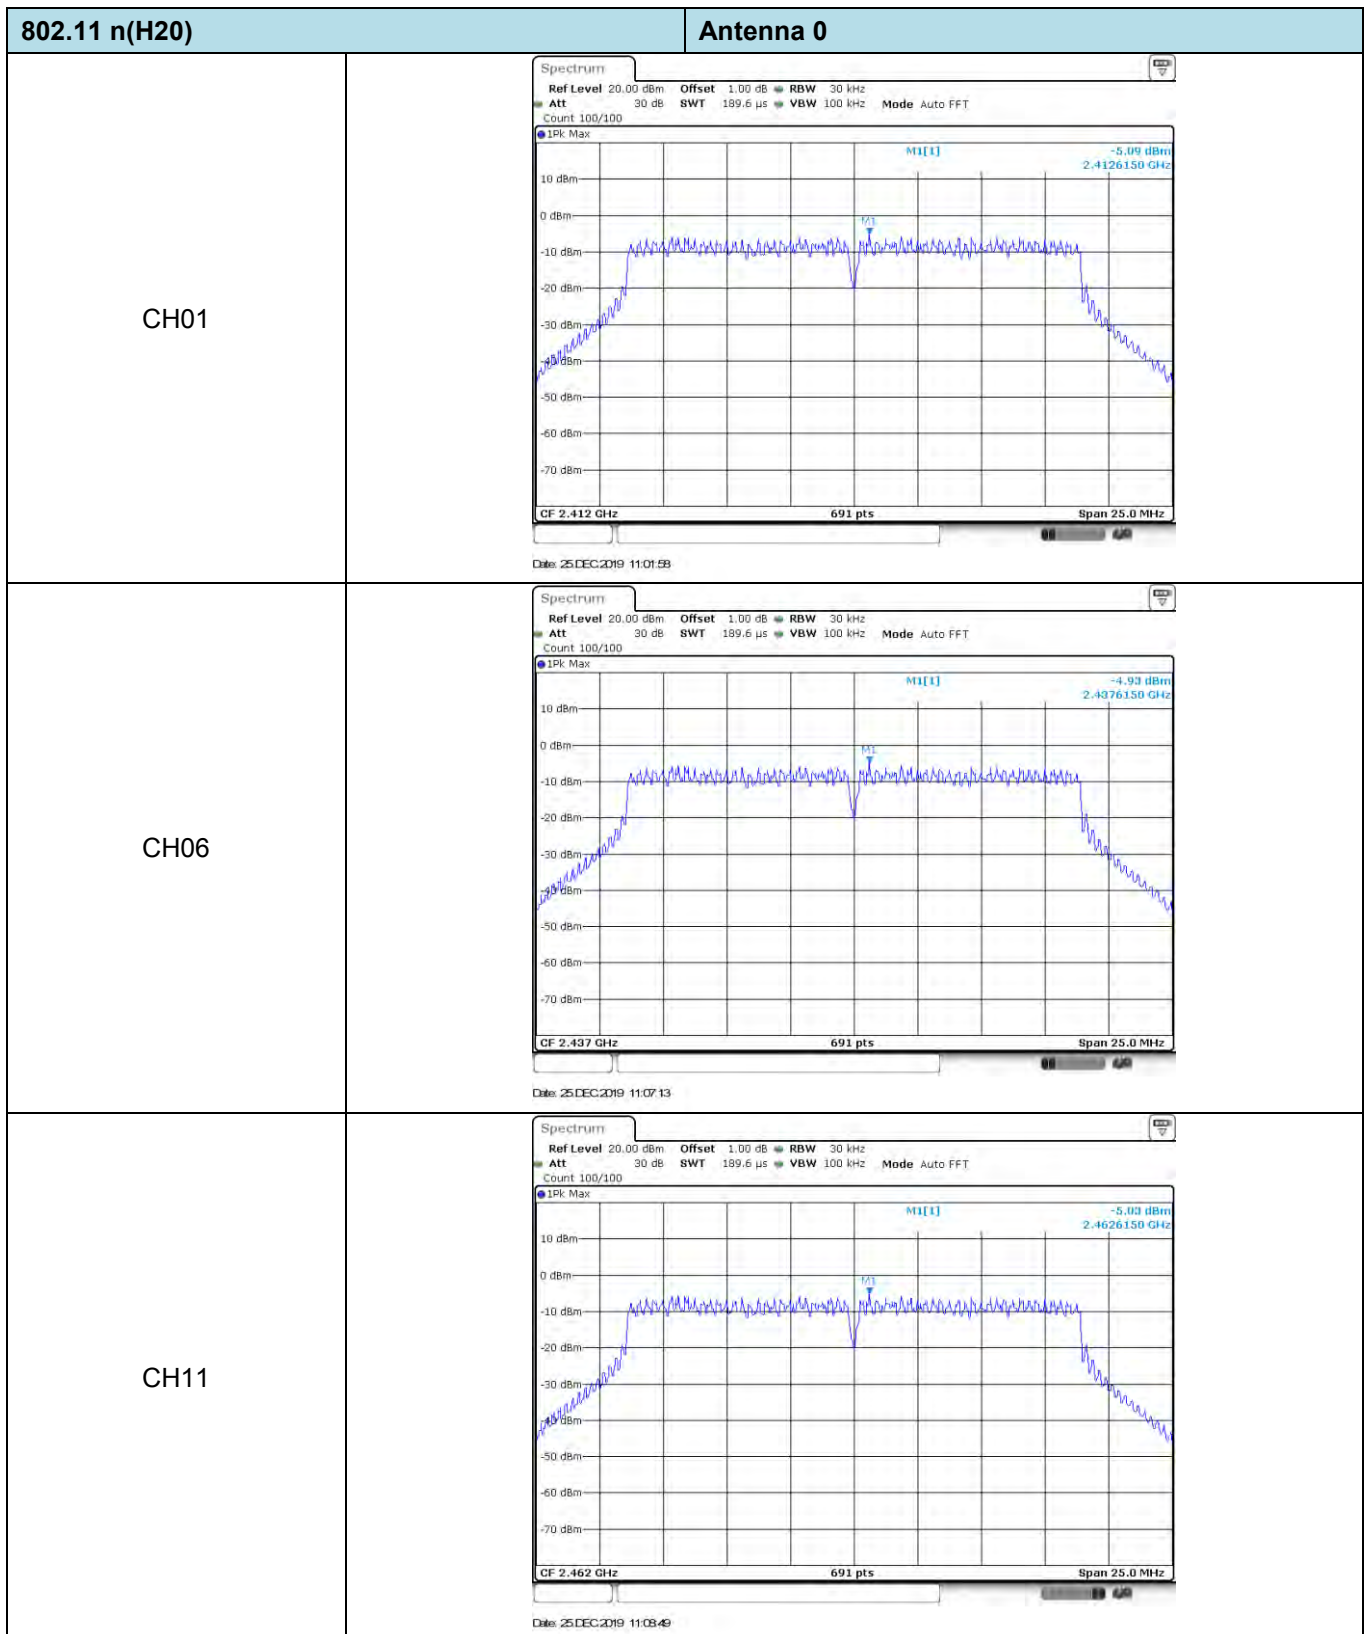

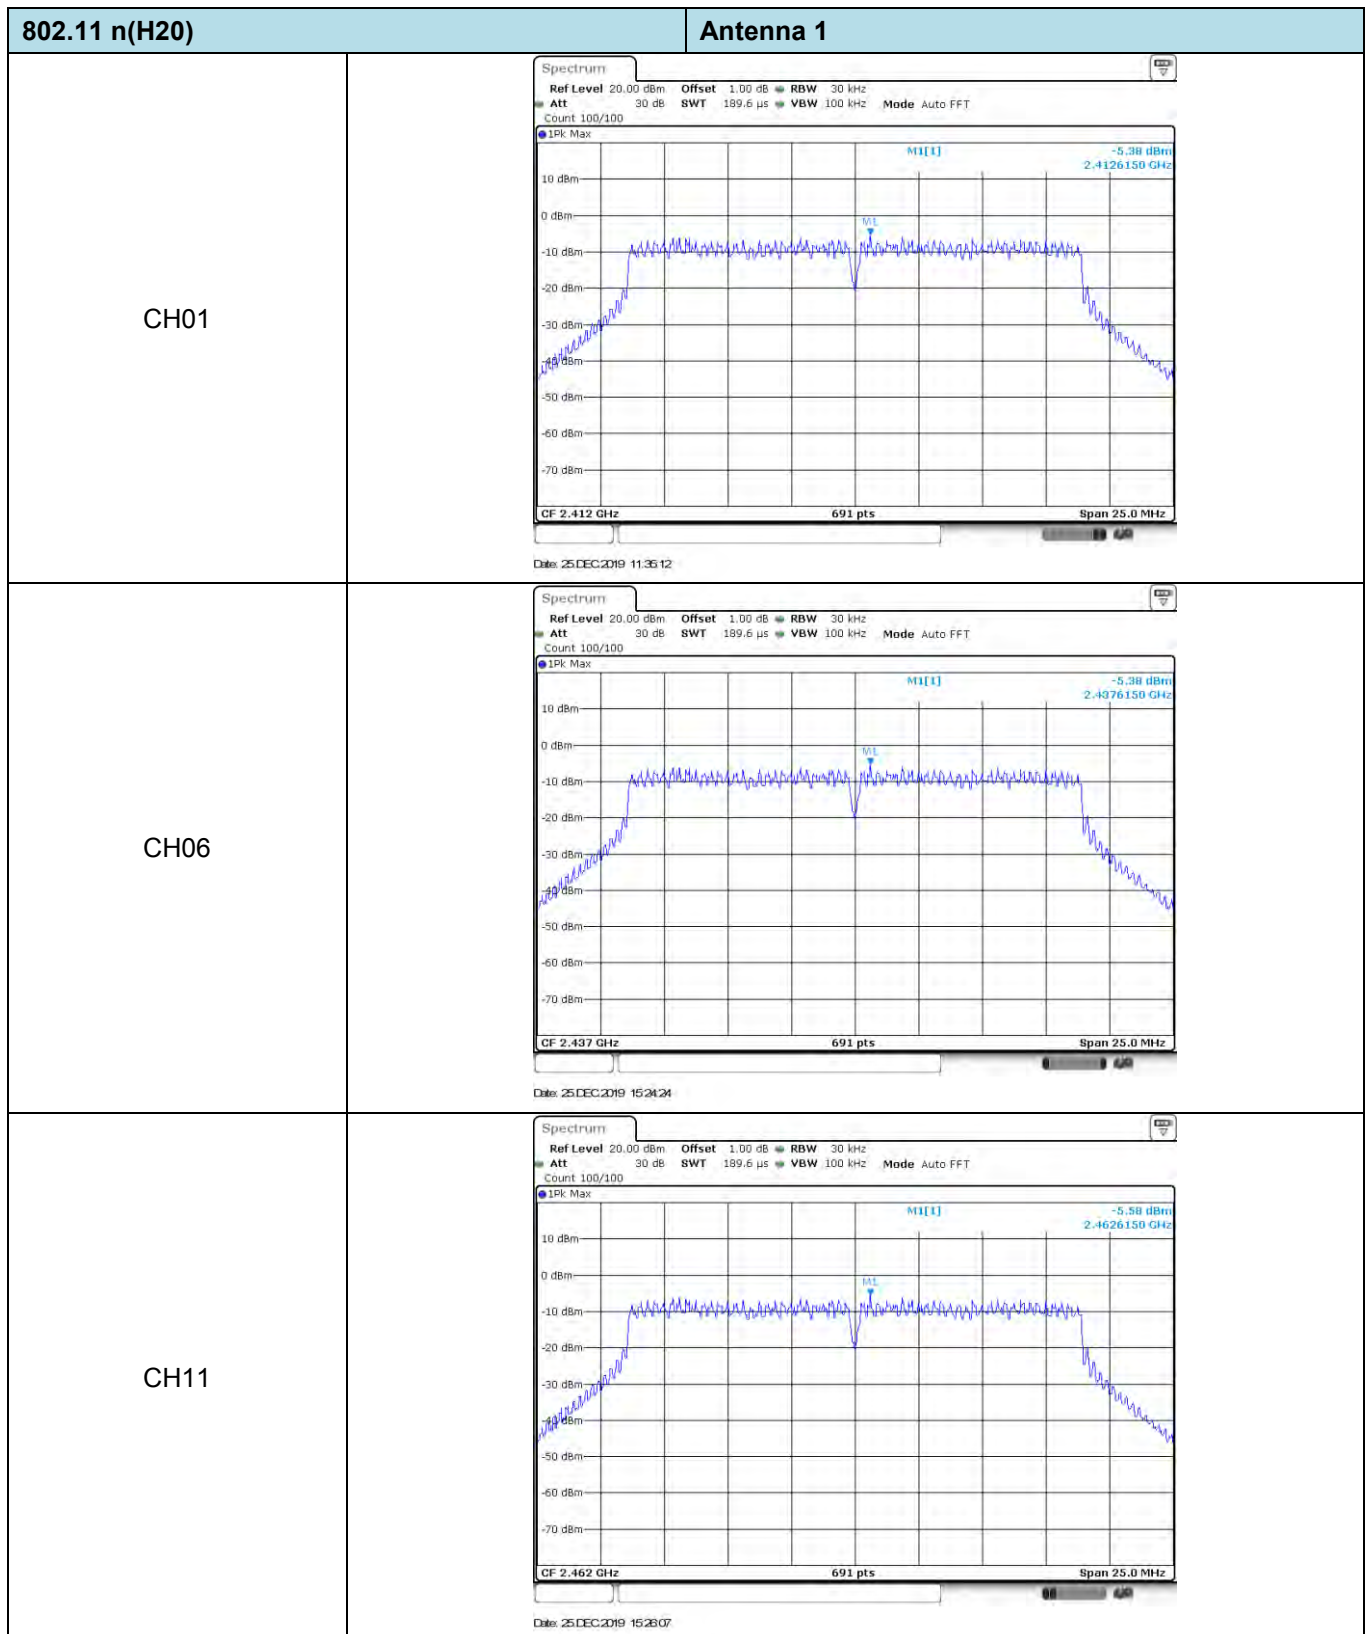


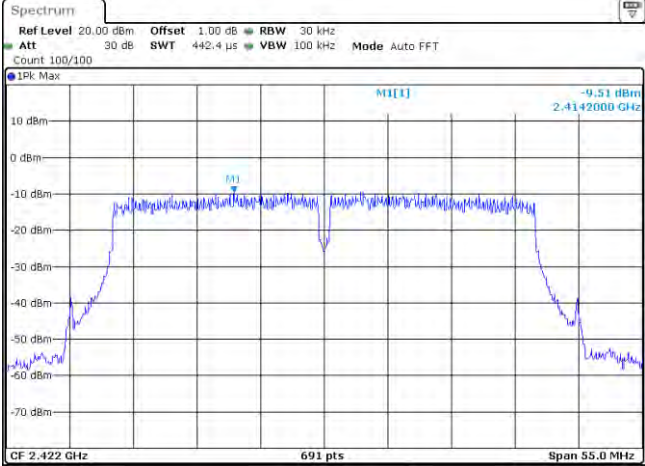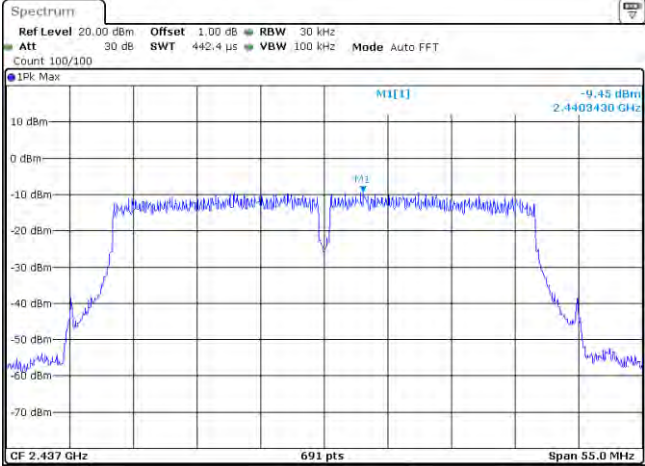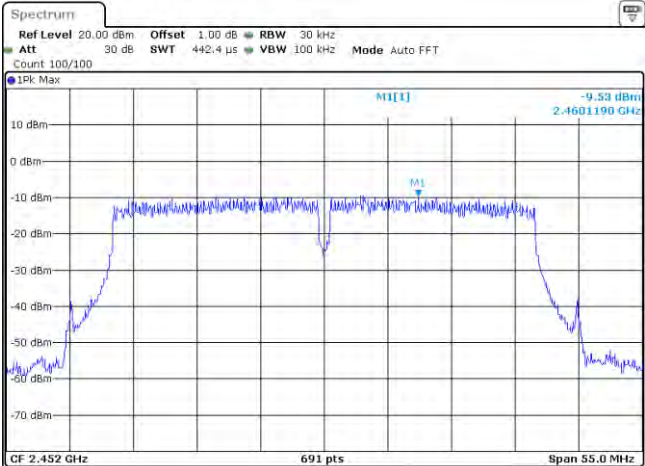
802.11 n(H40)	Antenna 0
CH03	 25 DEC 2019 11:11:10
CH06	 25 DEC 2019 11:12:53
CH09	 25 DEC 2019 11:14:23

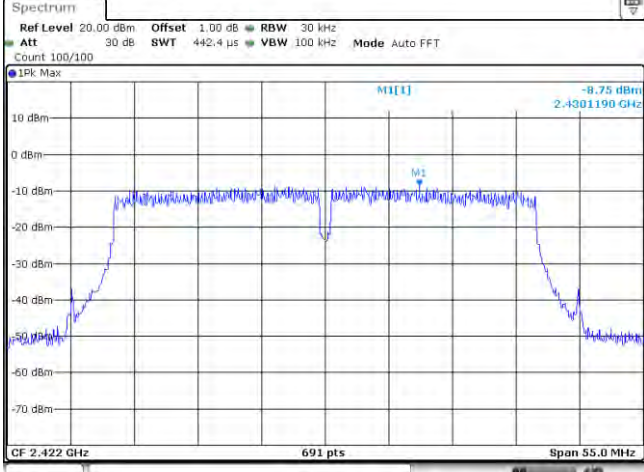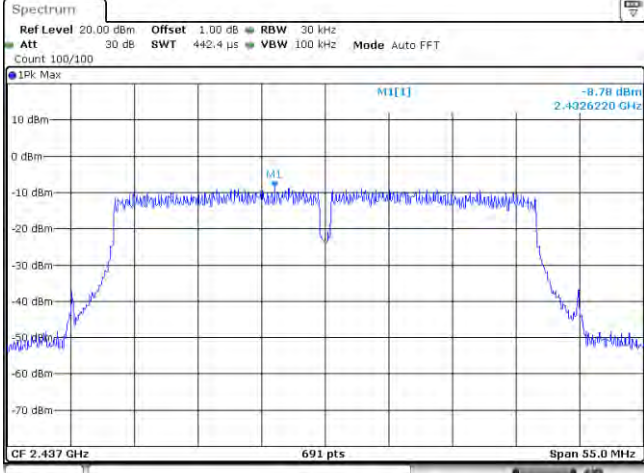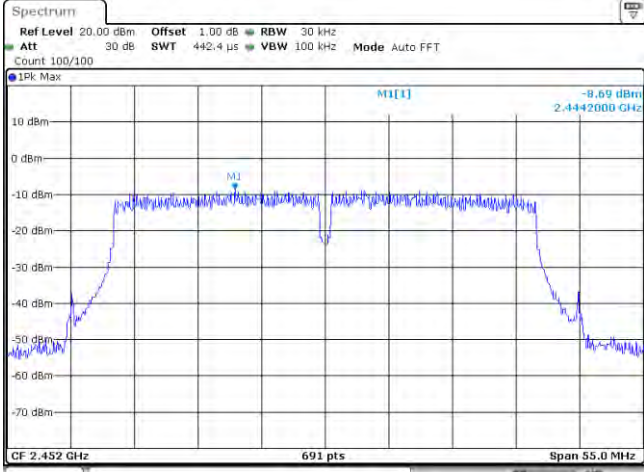
802.11 n(H40)	Antenna 1
CH03	 CF 2.422 GHz 691 pts Span 55.0 MHz Date: 25 DEC 2019 16:31:04
CH06	 CF 2.437 GHz 691 pts Span 55.0 MHz Date: 25 DEC 2019 16:32:59
CH09	 CF 2.452 GHz 691 pts Span 55.0 MHz Date: 25 DEC 2019 16:34:15


Appendix C: 6dB Bandwidth


Type	Channel	6dB Bandwidth (MHz)		Limit (kHz)	Result
		Antenna 0	Antenna 1		
802.11b	01	10.11	10.11	≥500	Pass
	06	10.11	10.11		
	11	10.11	10.14		
802.11g	01	16.62	16.65	≥500	Pass
	06	16.65	16.65		
	11	16.62	16.62		
802.11n(HT20)	01	17.85	17.88	≥500	Pass
	06	17.88	17.85		
	11	17.88	17.85		
802.11n(HT40)	03	36.54	36.54	≥500	Pass
	06	36.54	36.54		
	09	36.54	36.60		

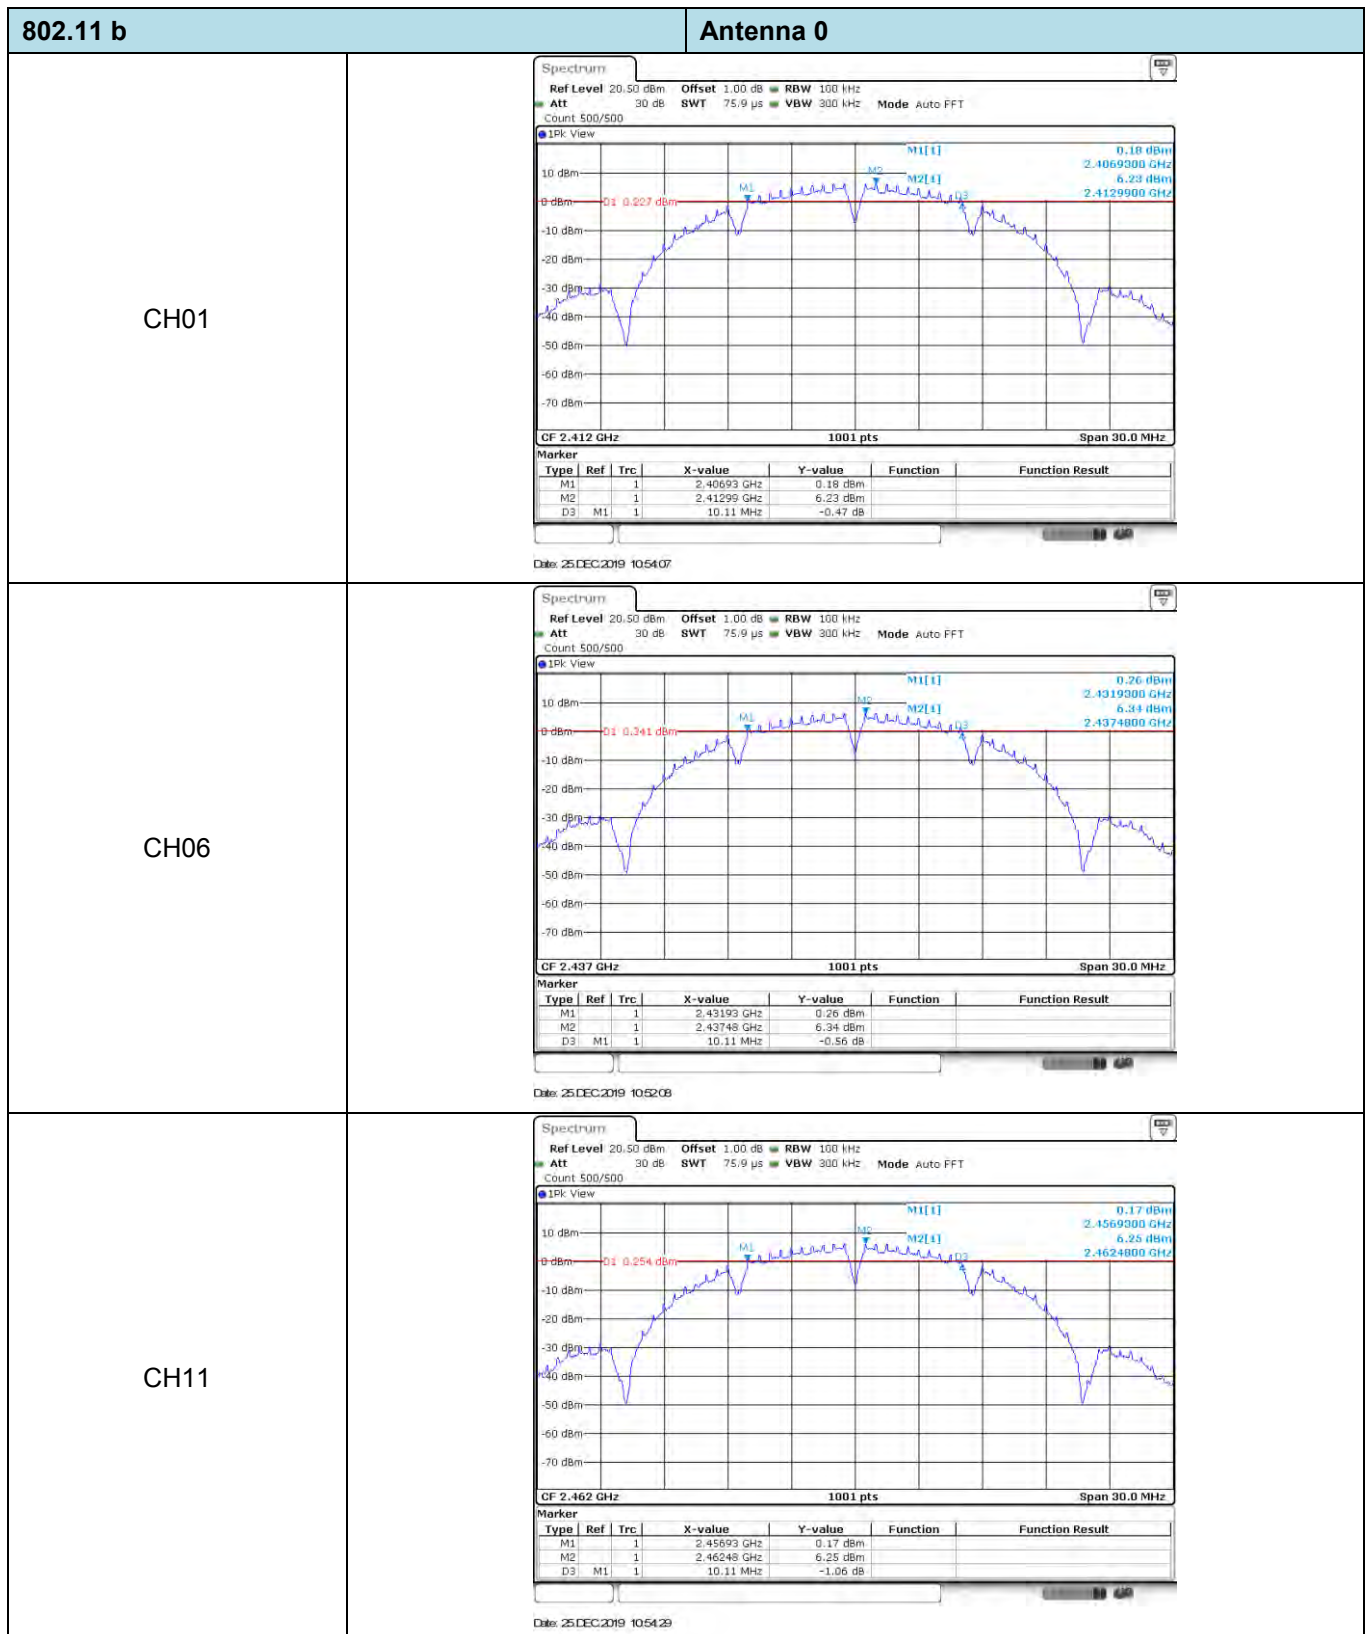


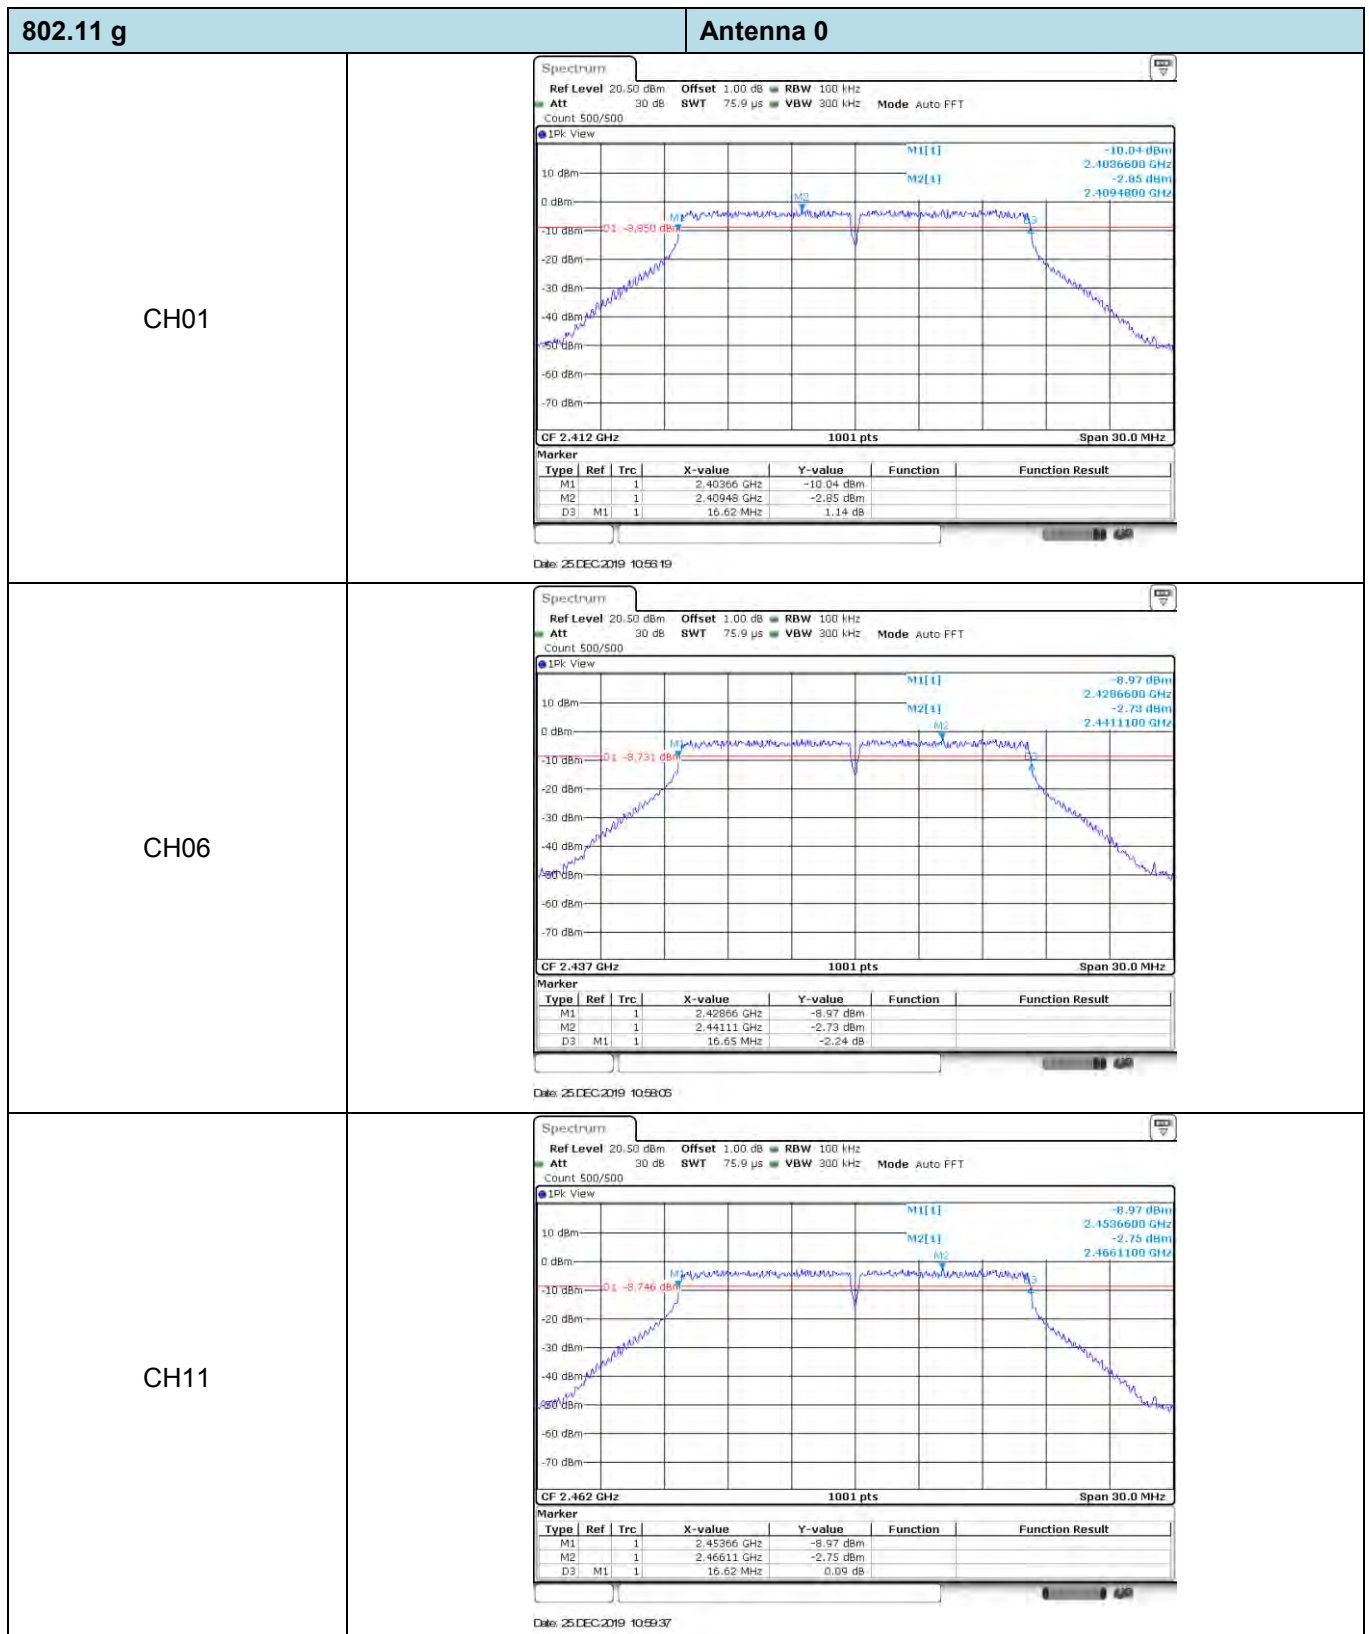

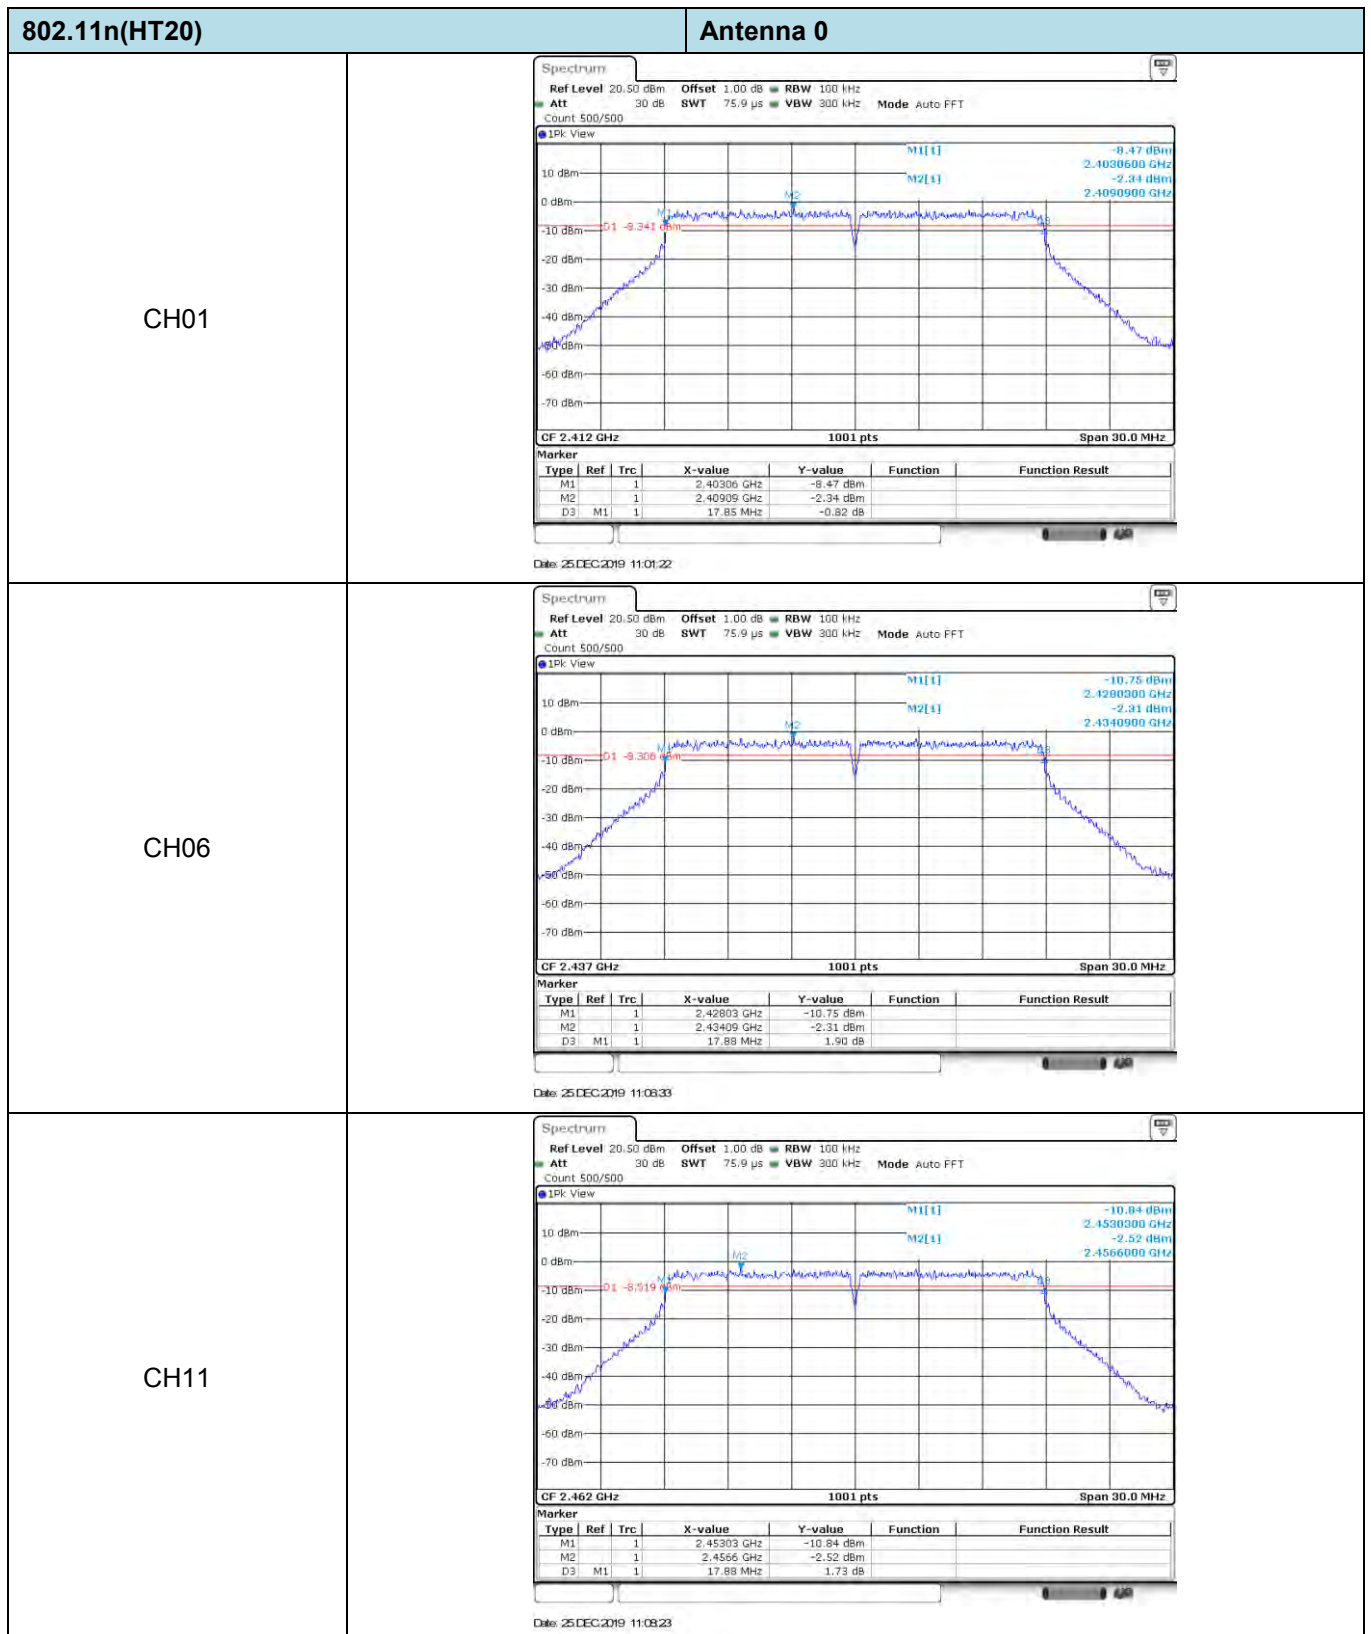

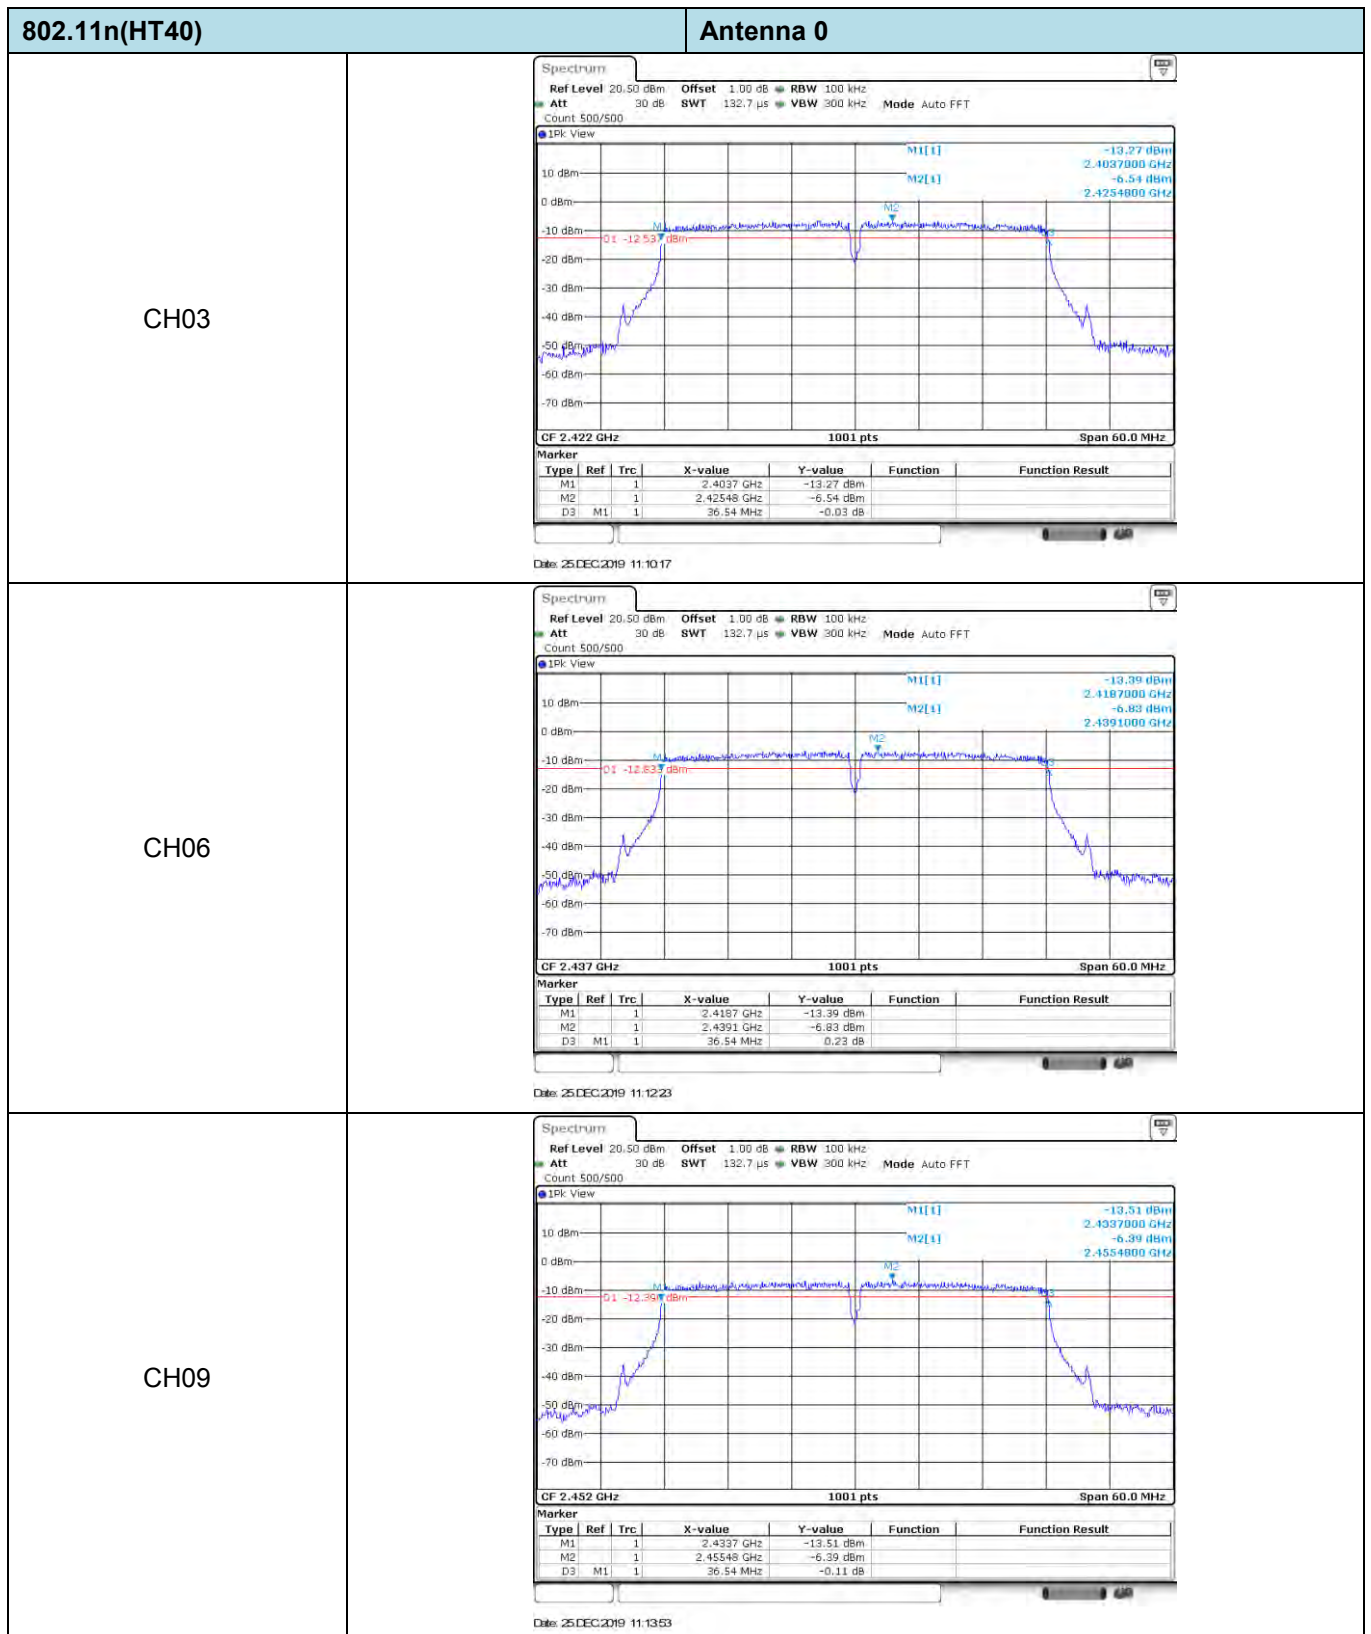

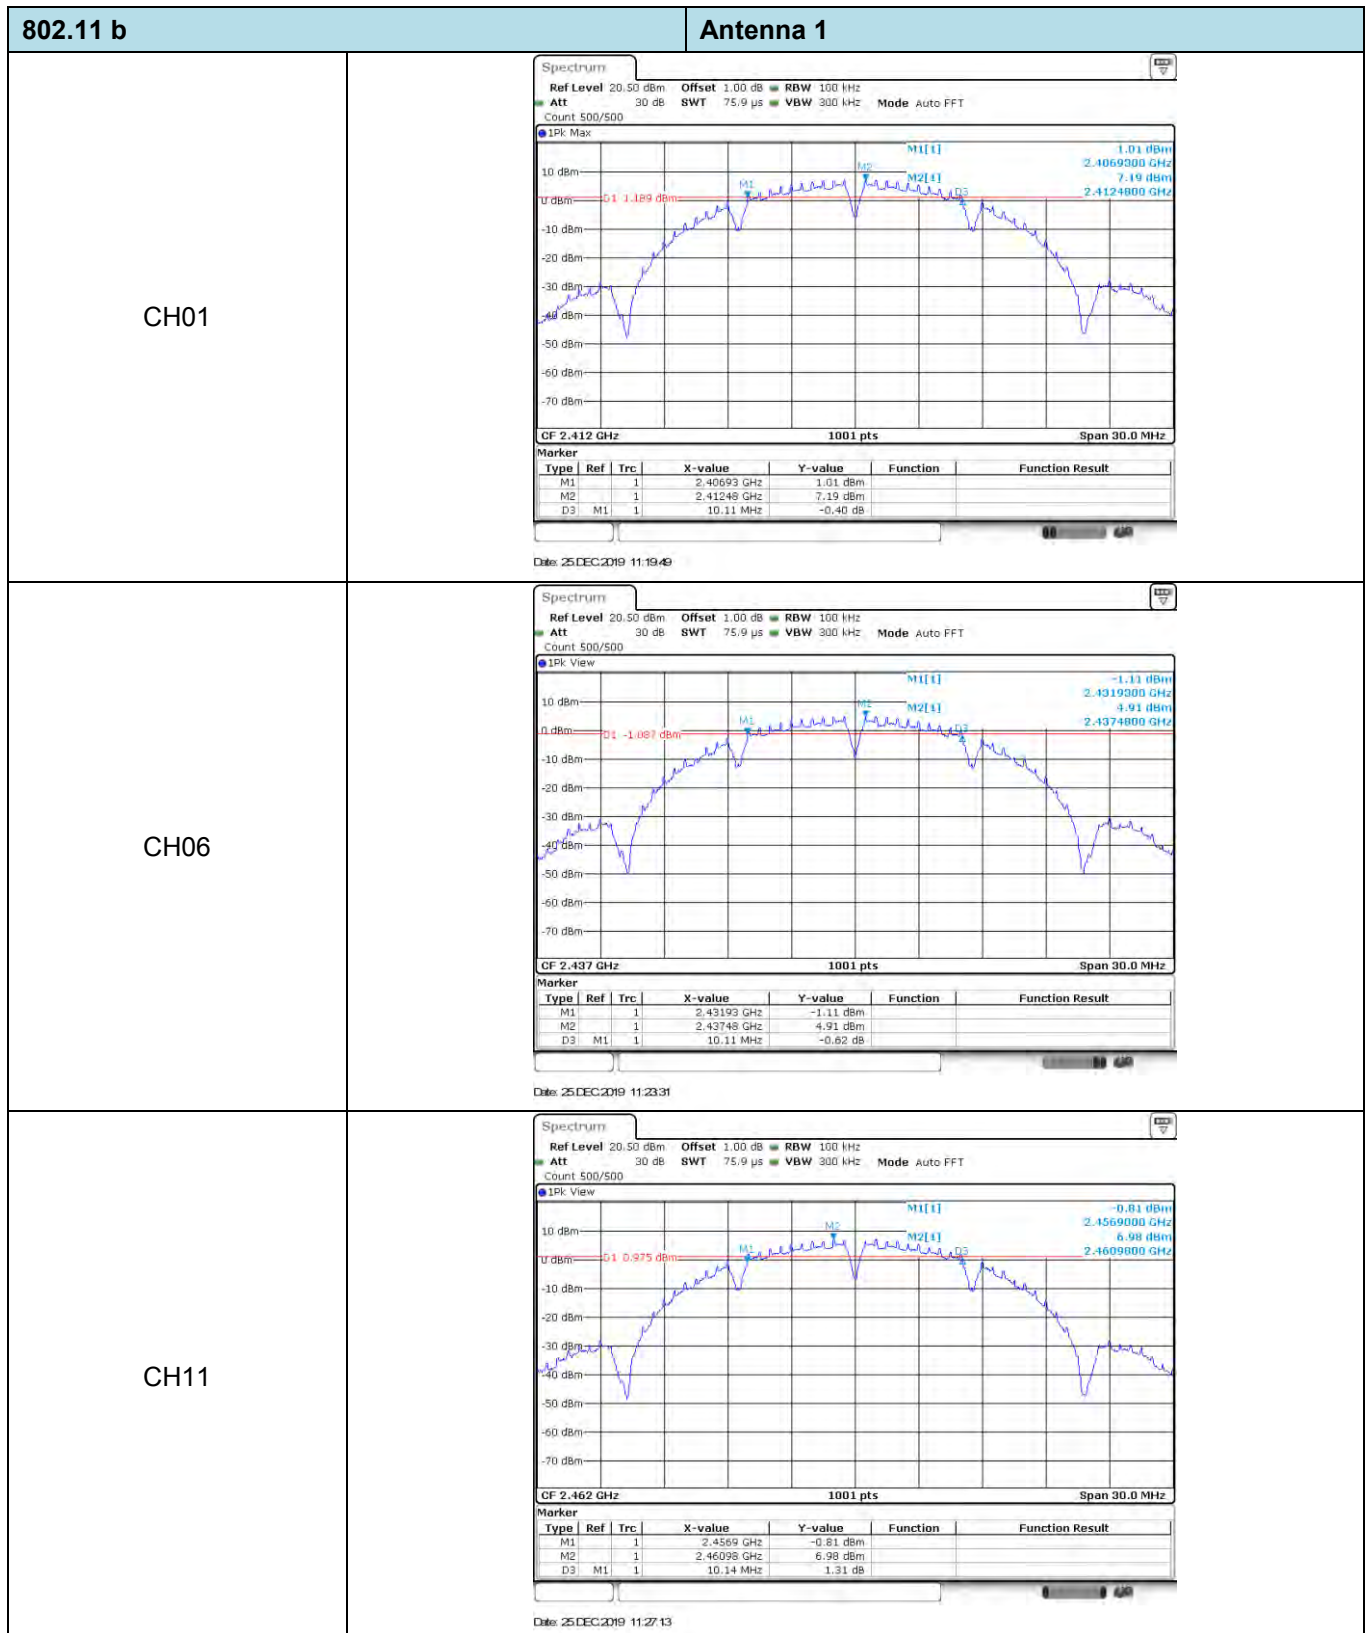


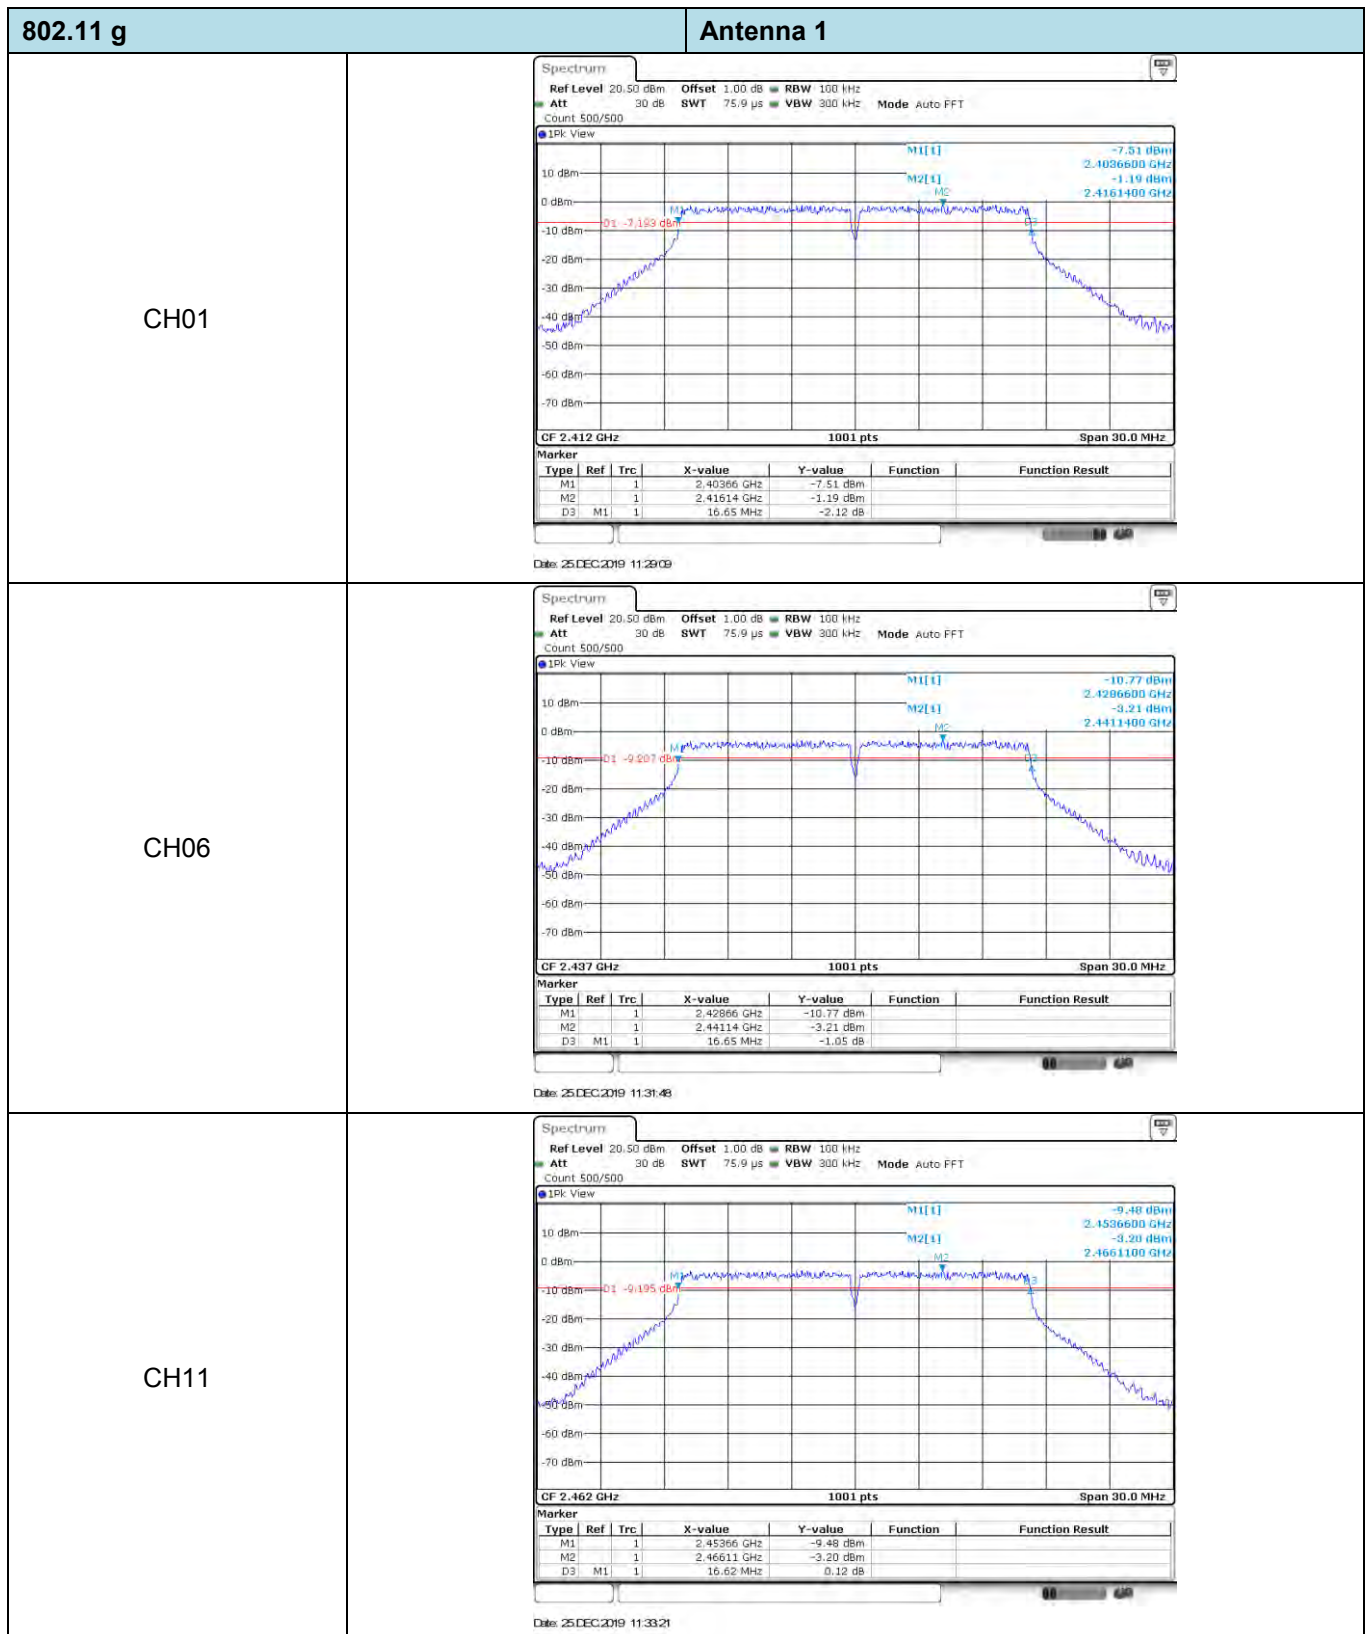


802.11n(HT20)

Antenna 1


CH01

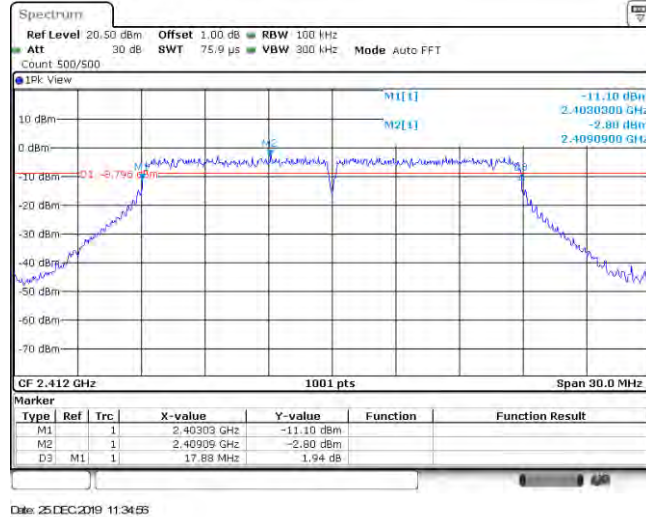


CH06

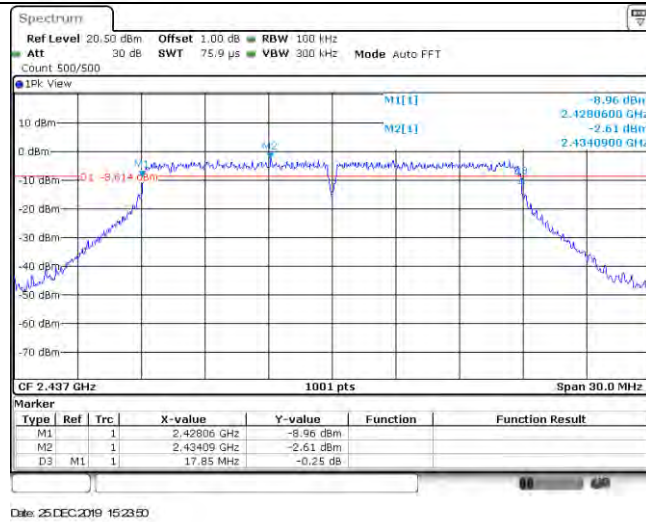


CH11

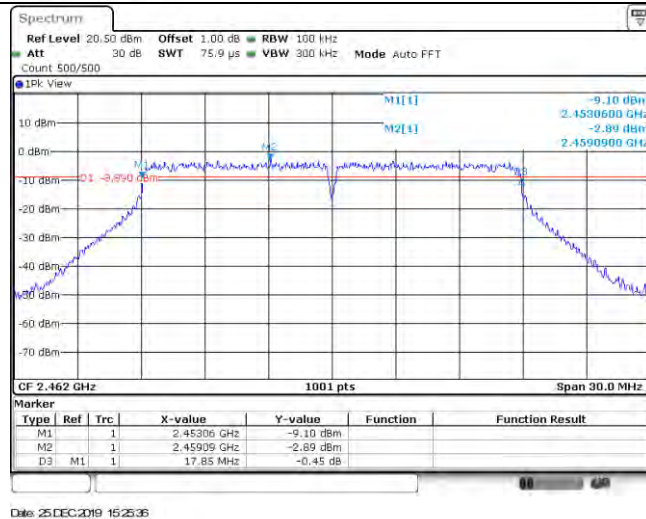


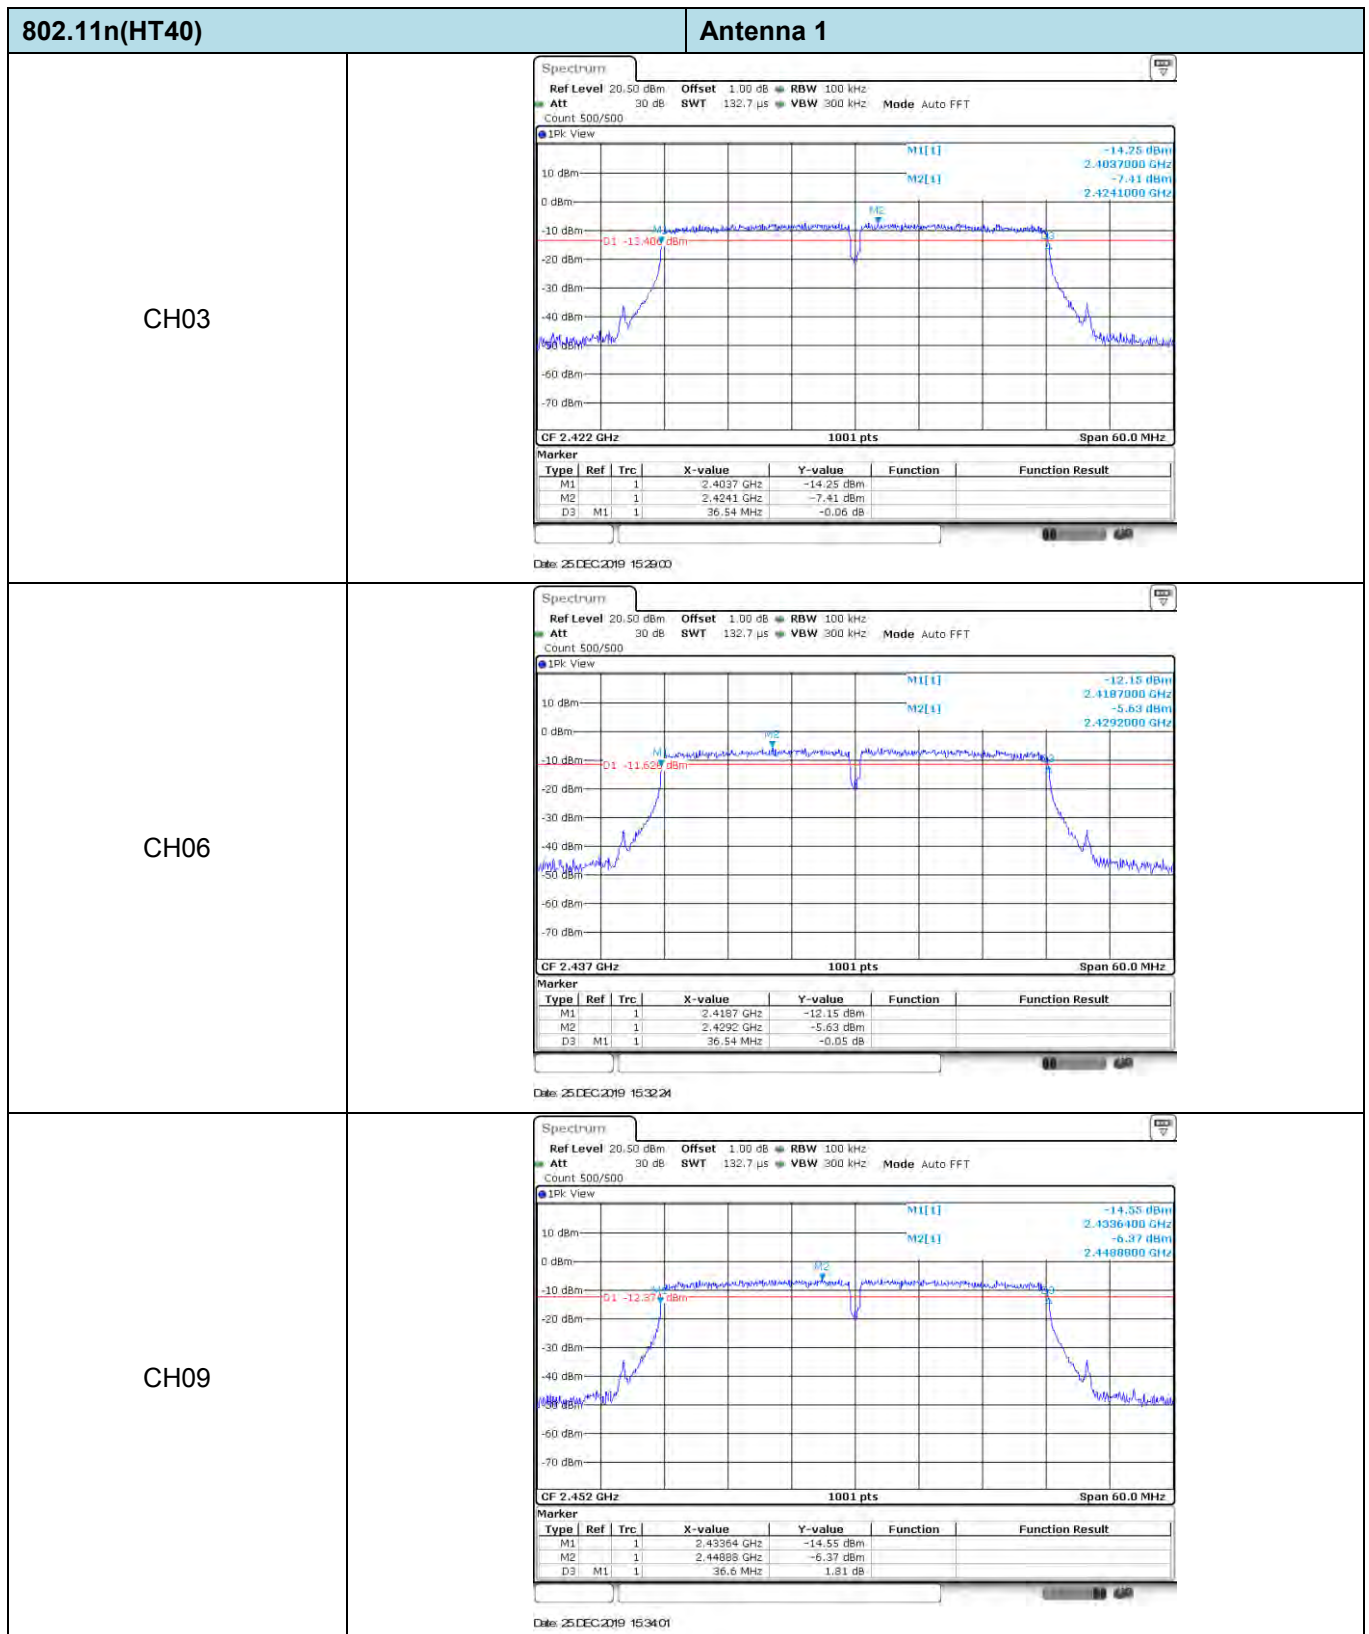



Appendix D: 99% Bandwidth

Type	Channel	99% Bandwidth (MHz)		Limit (kHz)	Result
		Antenna 0	Antenna 1		
802.11b	01	15.08	15.11	N/A	Pass
	06	15.08	15.08		
	11	15.08	15.11		
802.11g	01	16.78	16.90	N/A	Pass
	06	16.99	16.90		
	11	16.63	16.78		
802.11n(HT20)	01	18.07	17.98	N/A	Pass
	06	17.92	17.92		
	11	18.07	17.92		
802.11n(HT40)	03	36.26	36.32	N/A	Pass
	06	36.26	36.32		
	09	36.26	36.32		

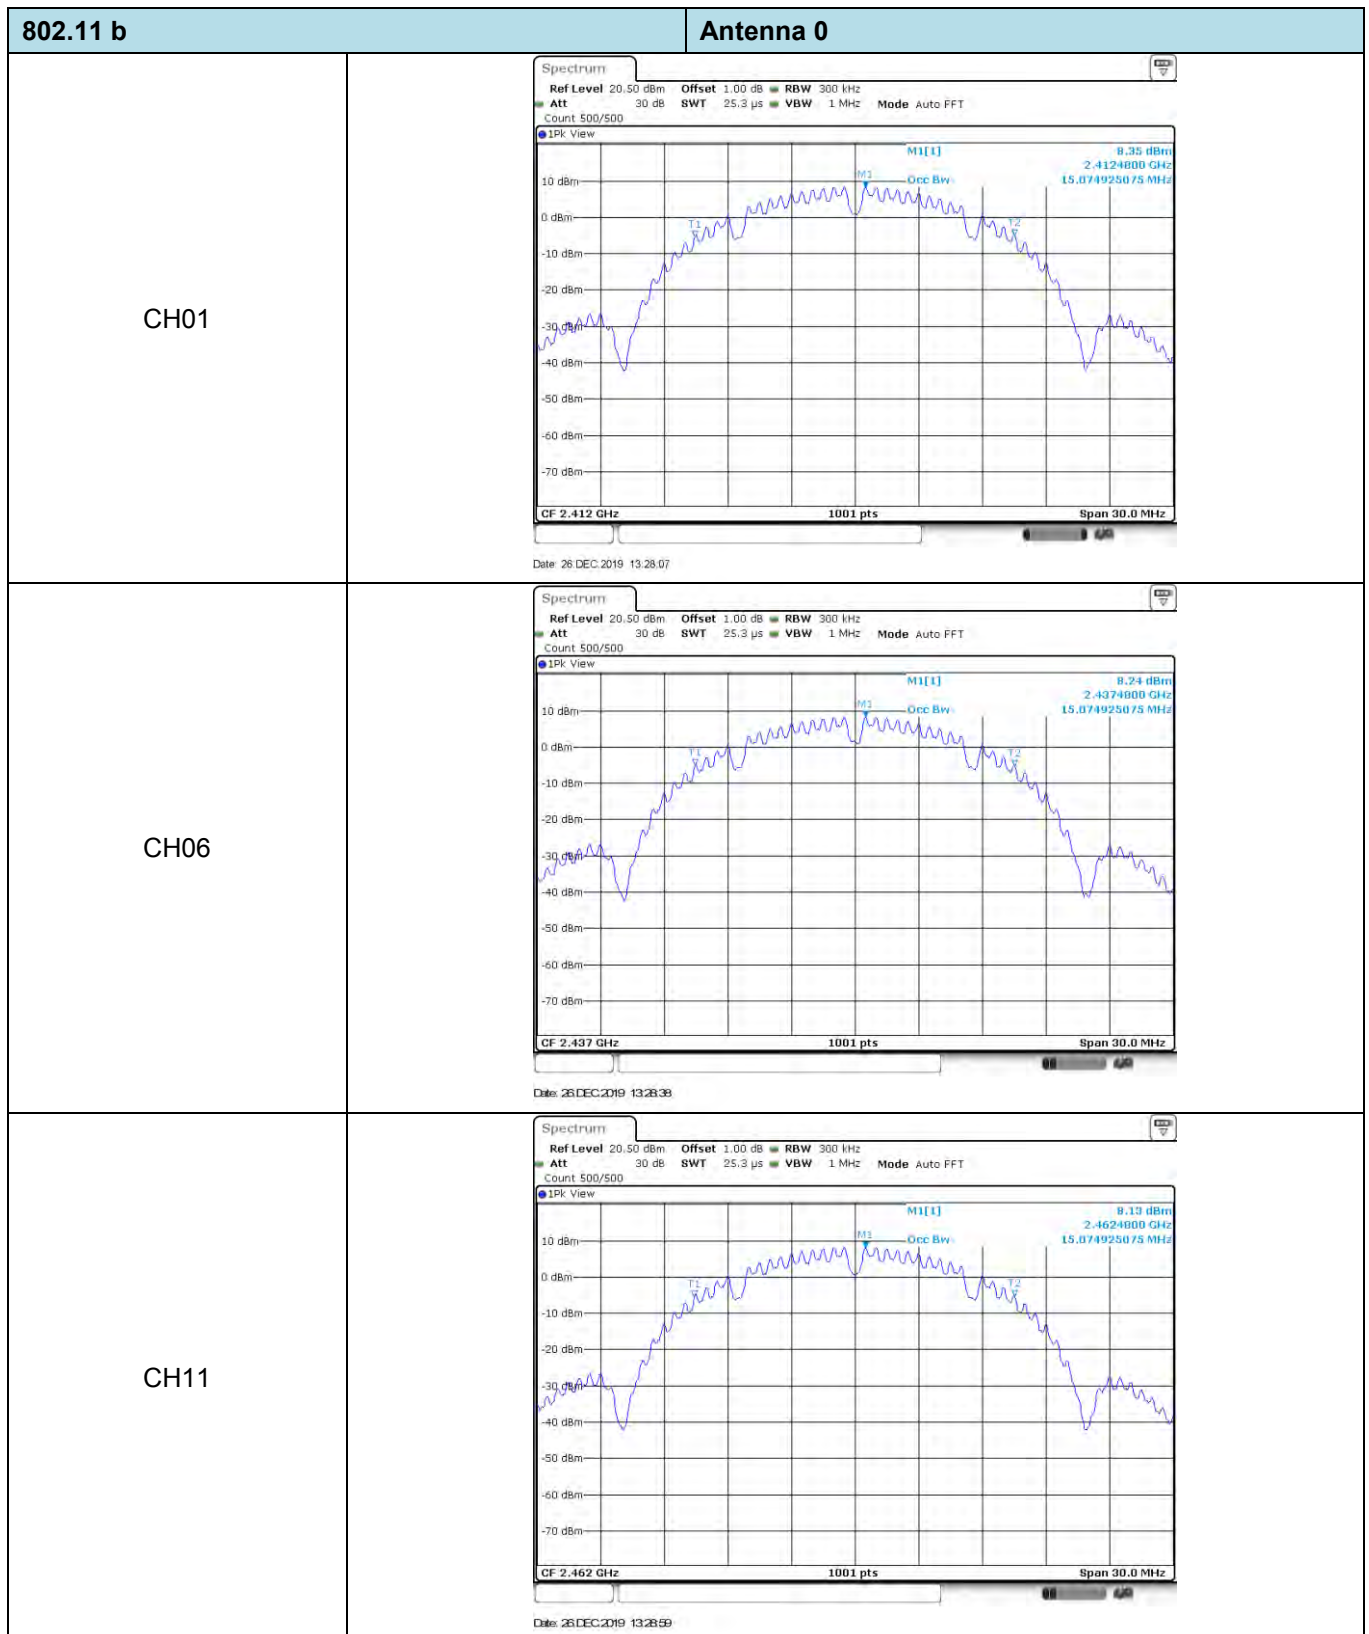

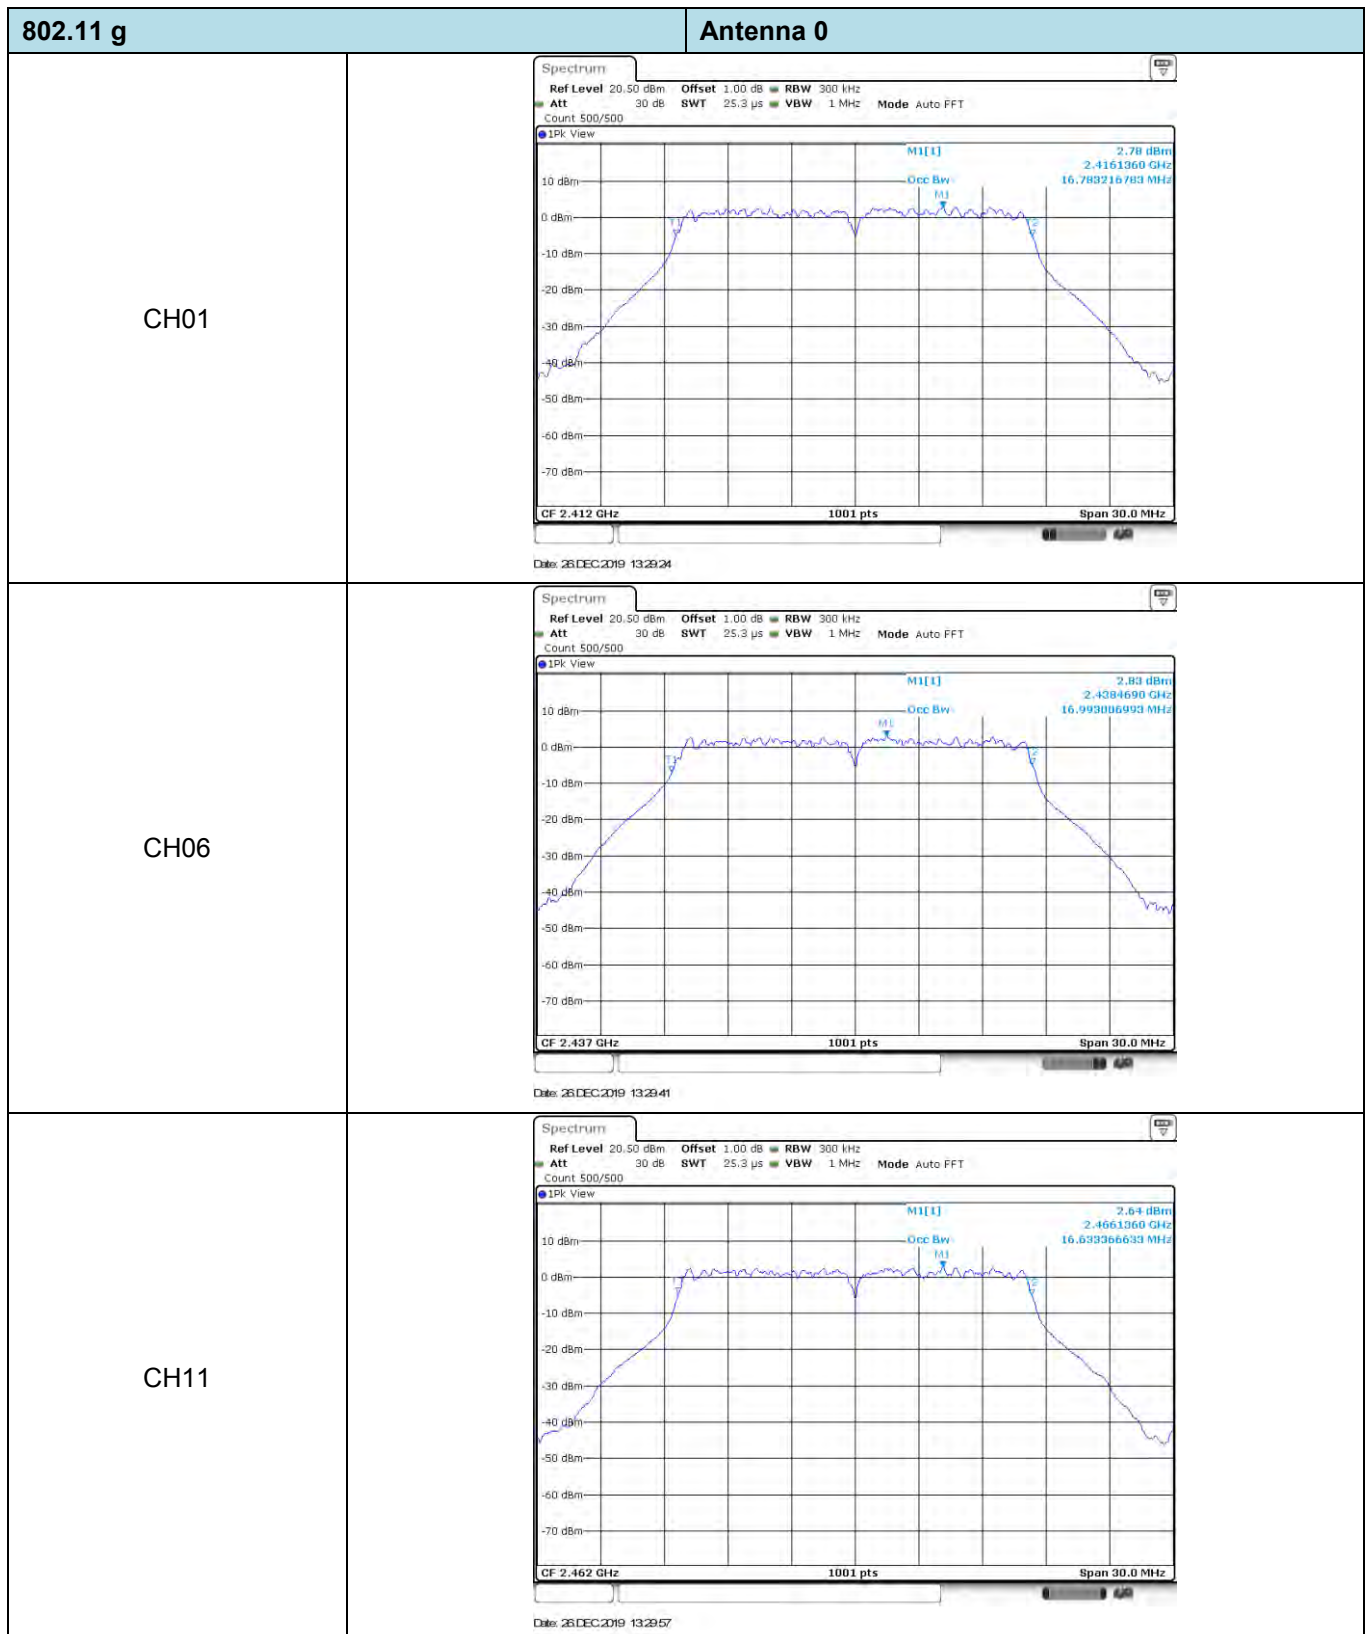

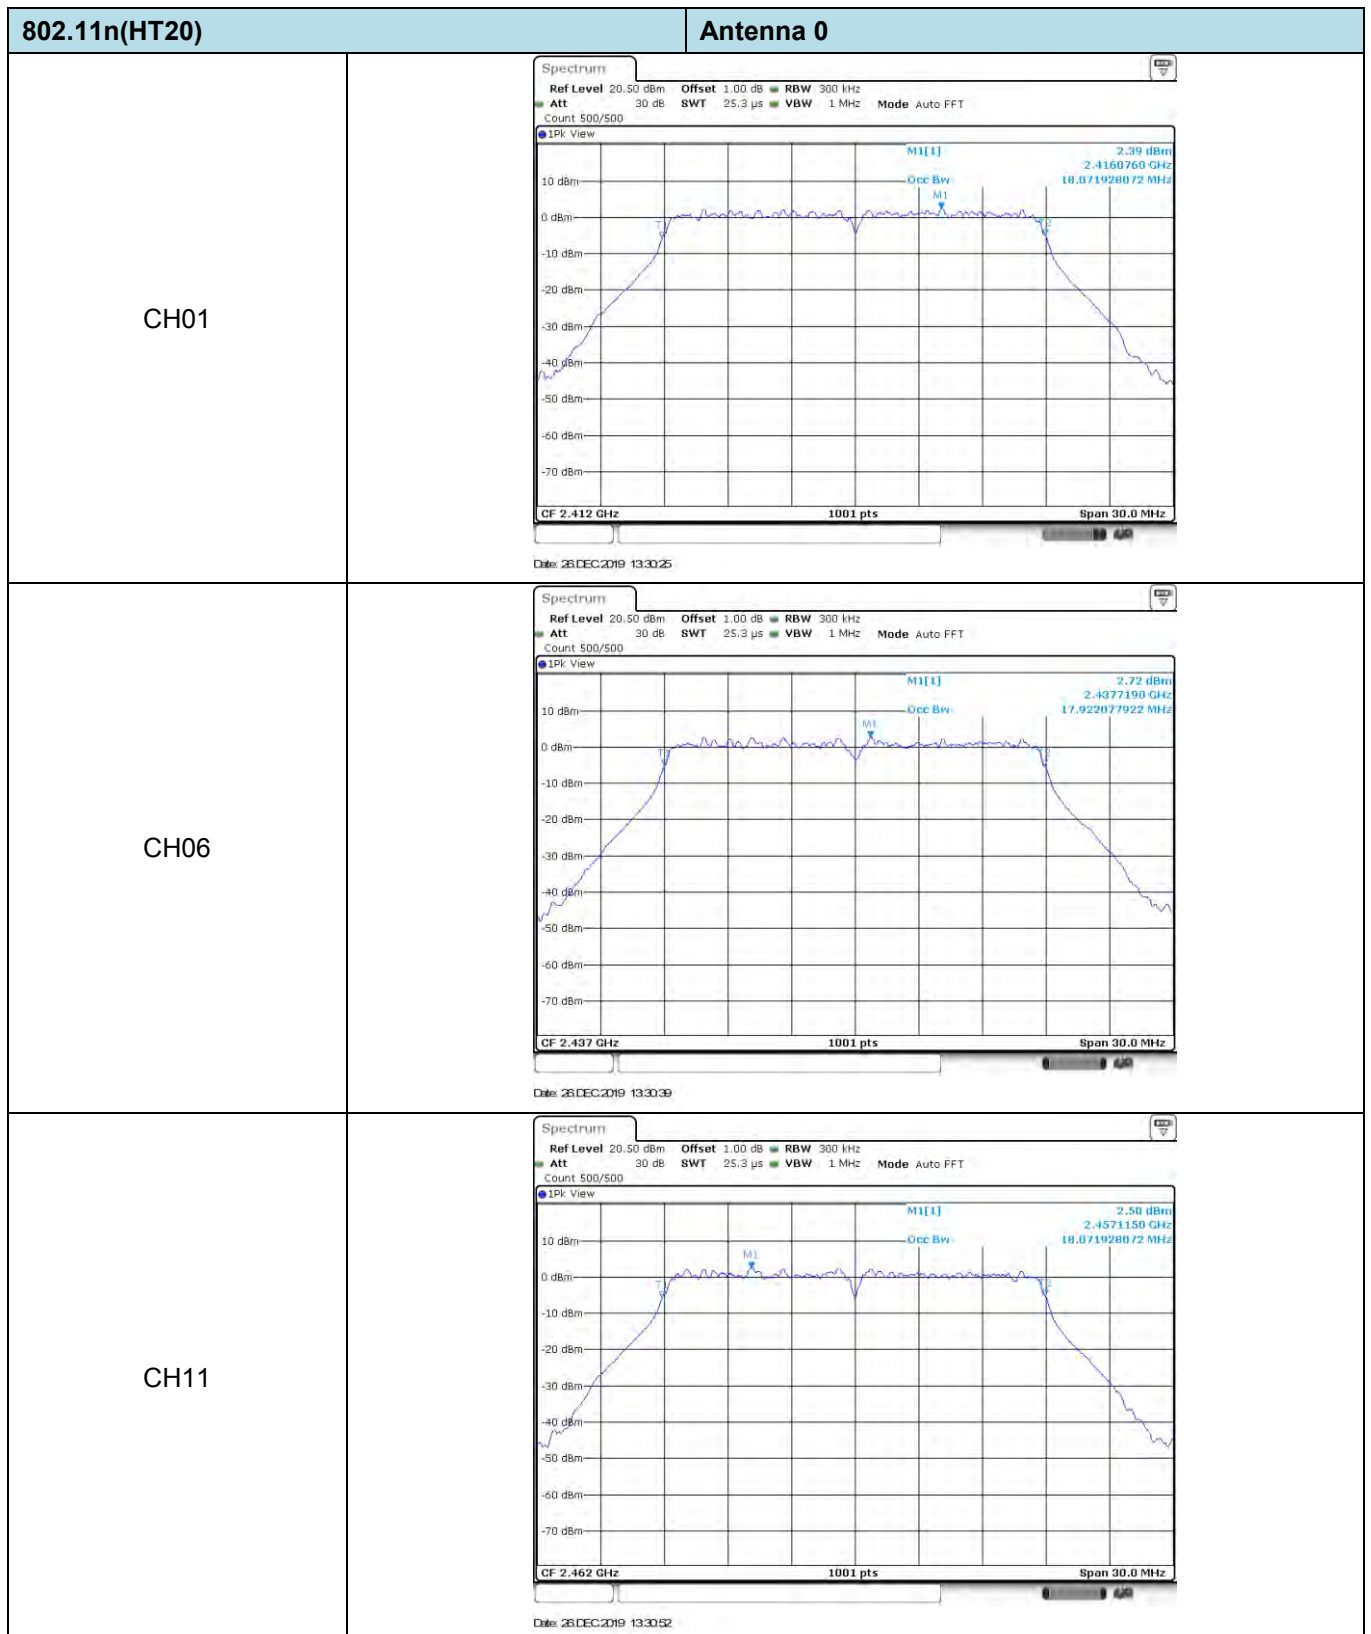


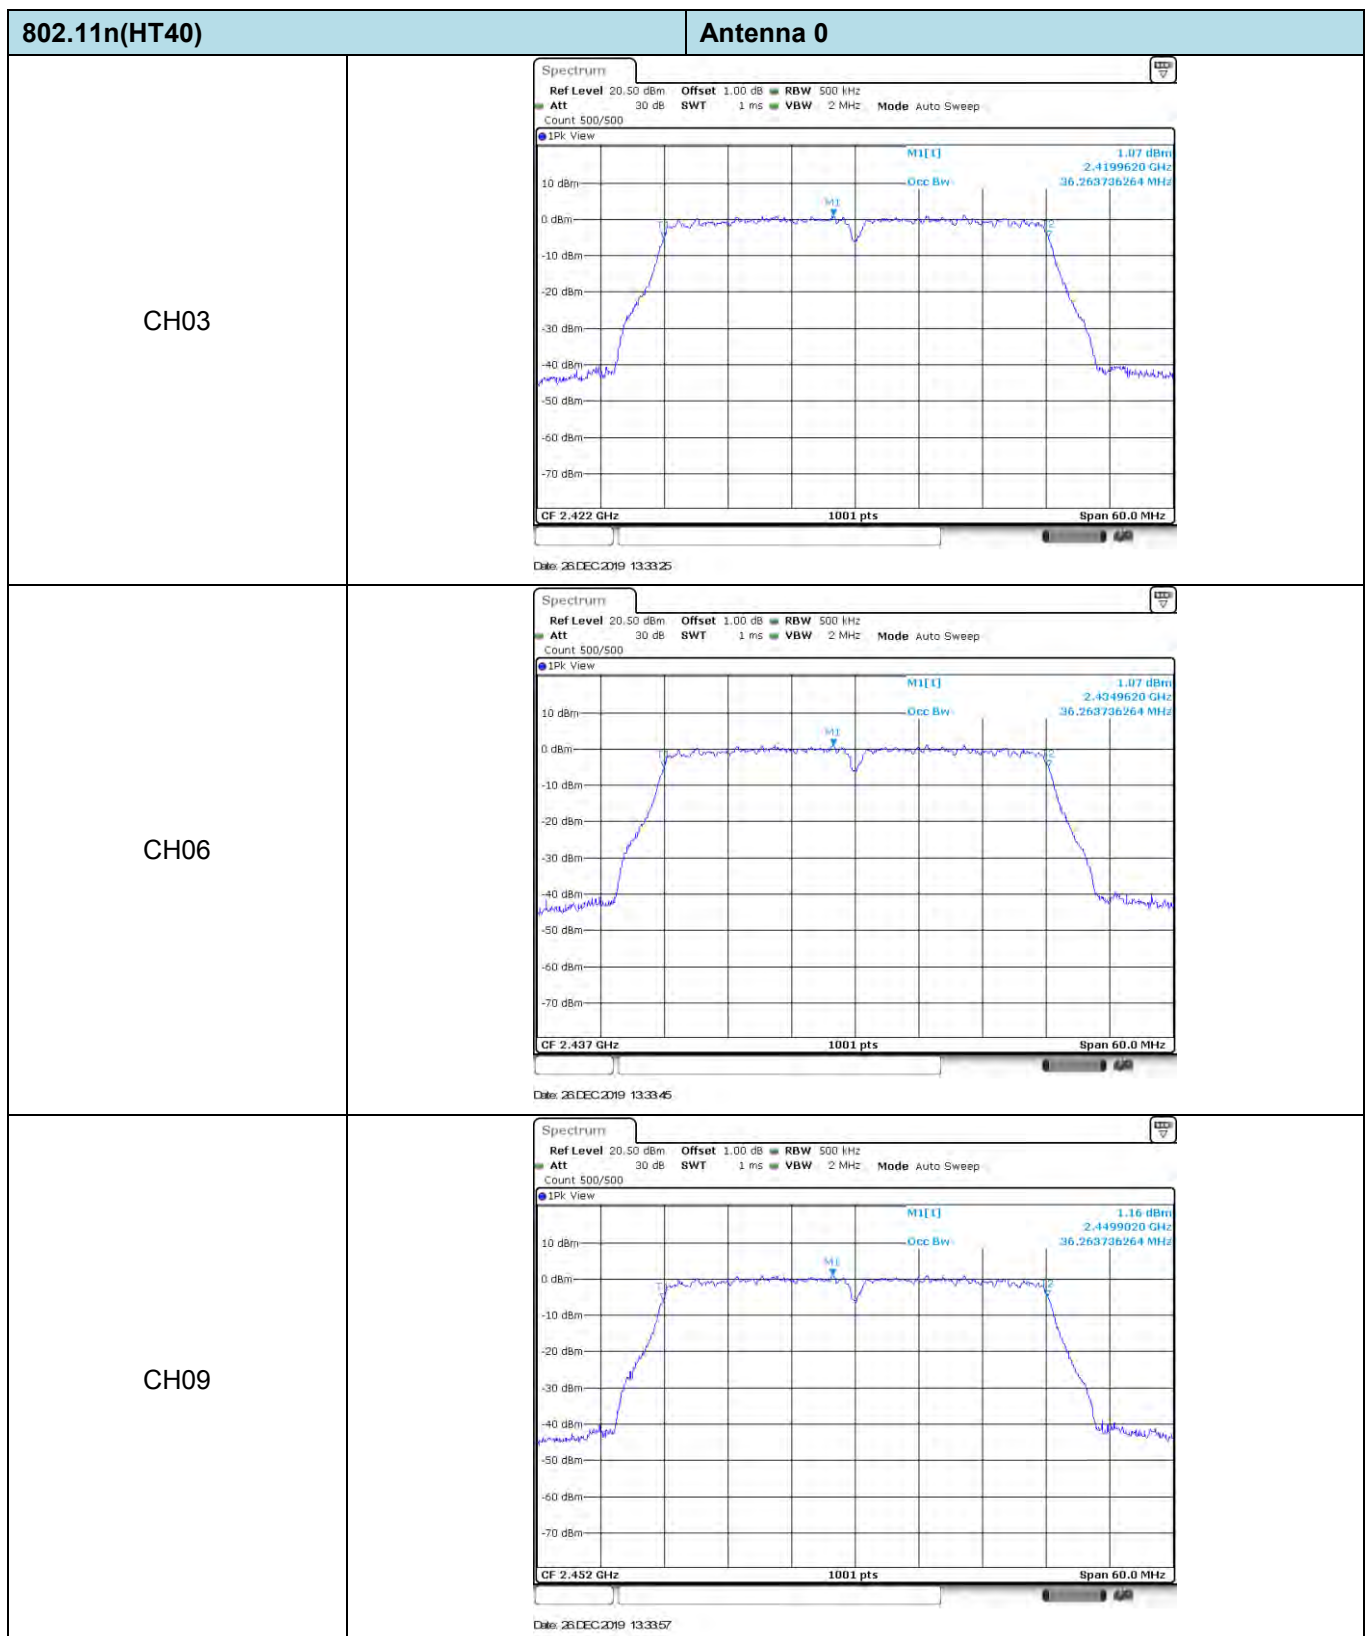


802.11 b

Antenna 1

CH01

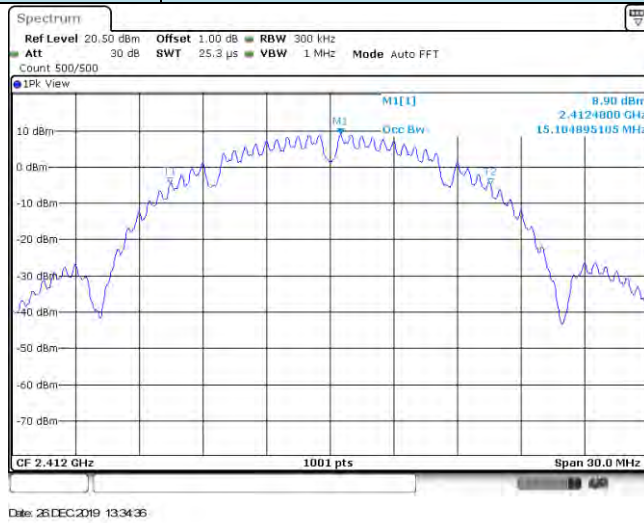



CH06

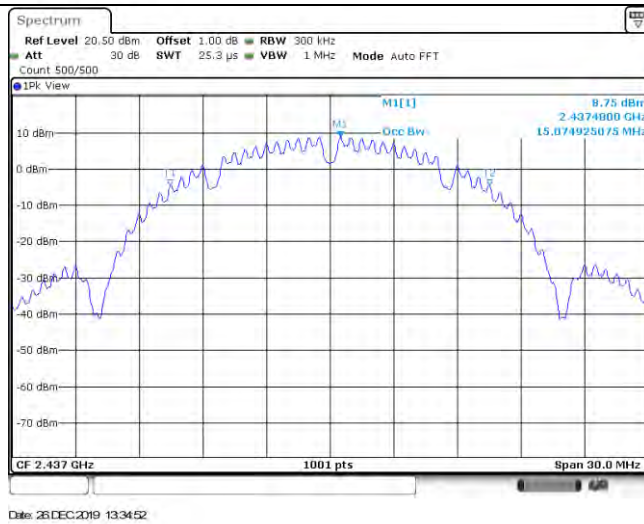


CH11



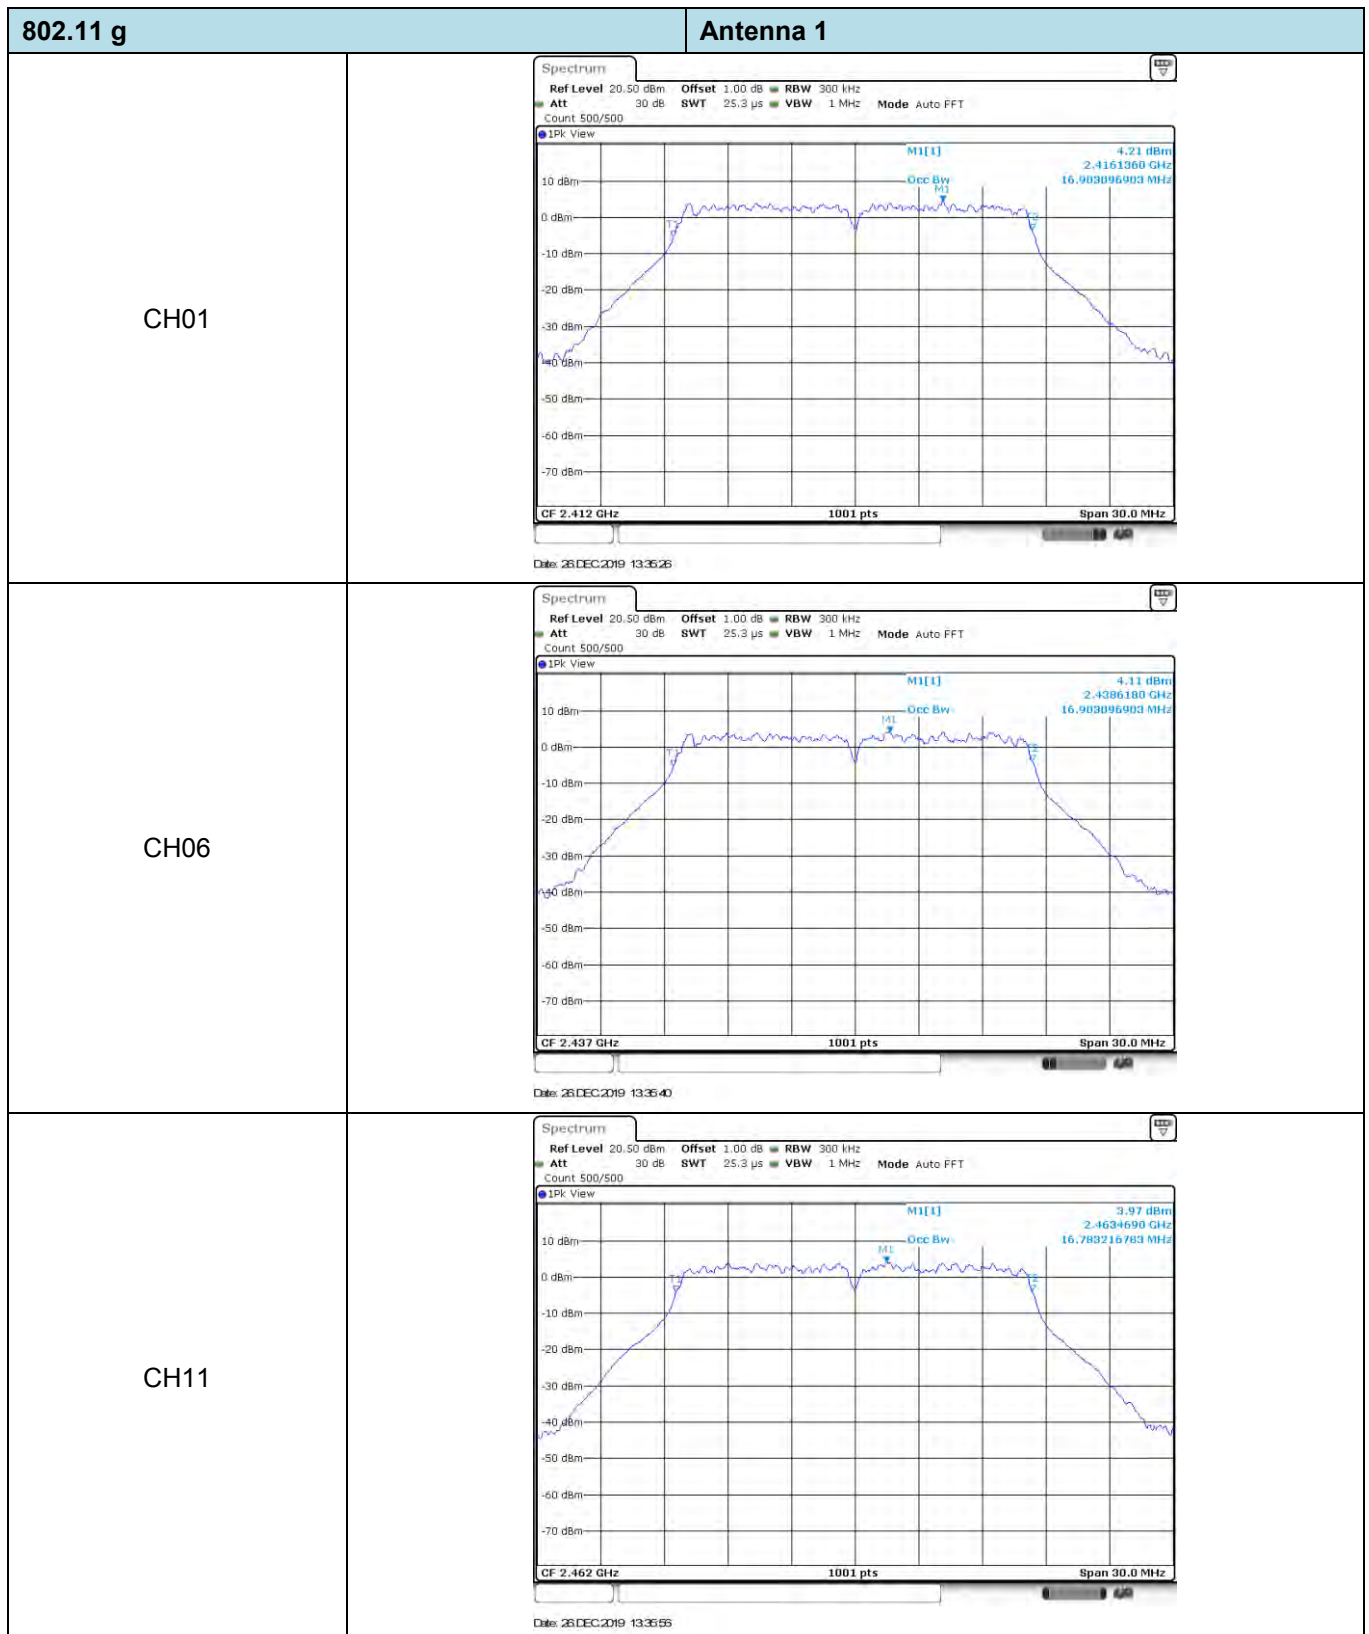


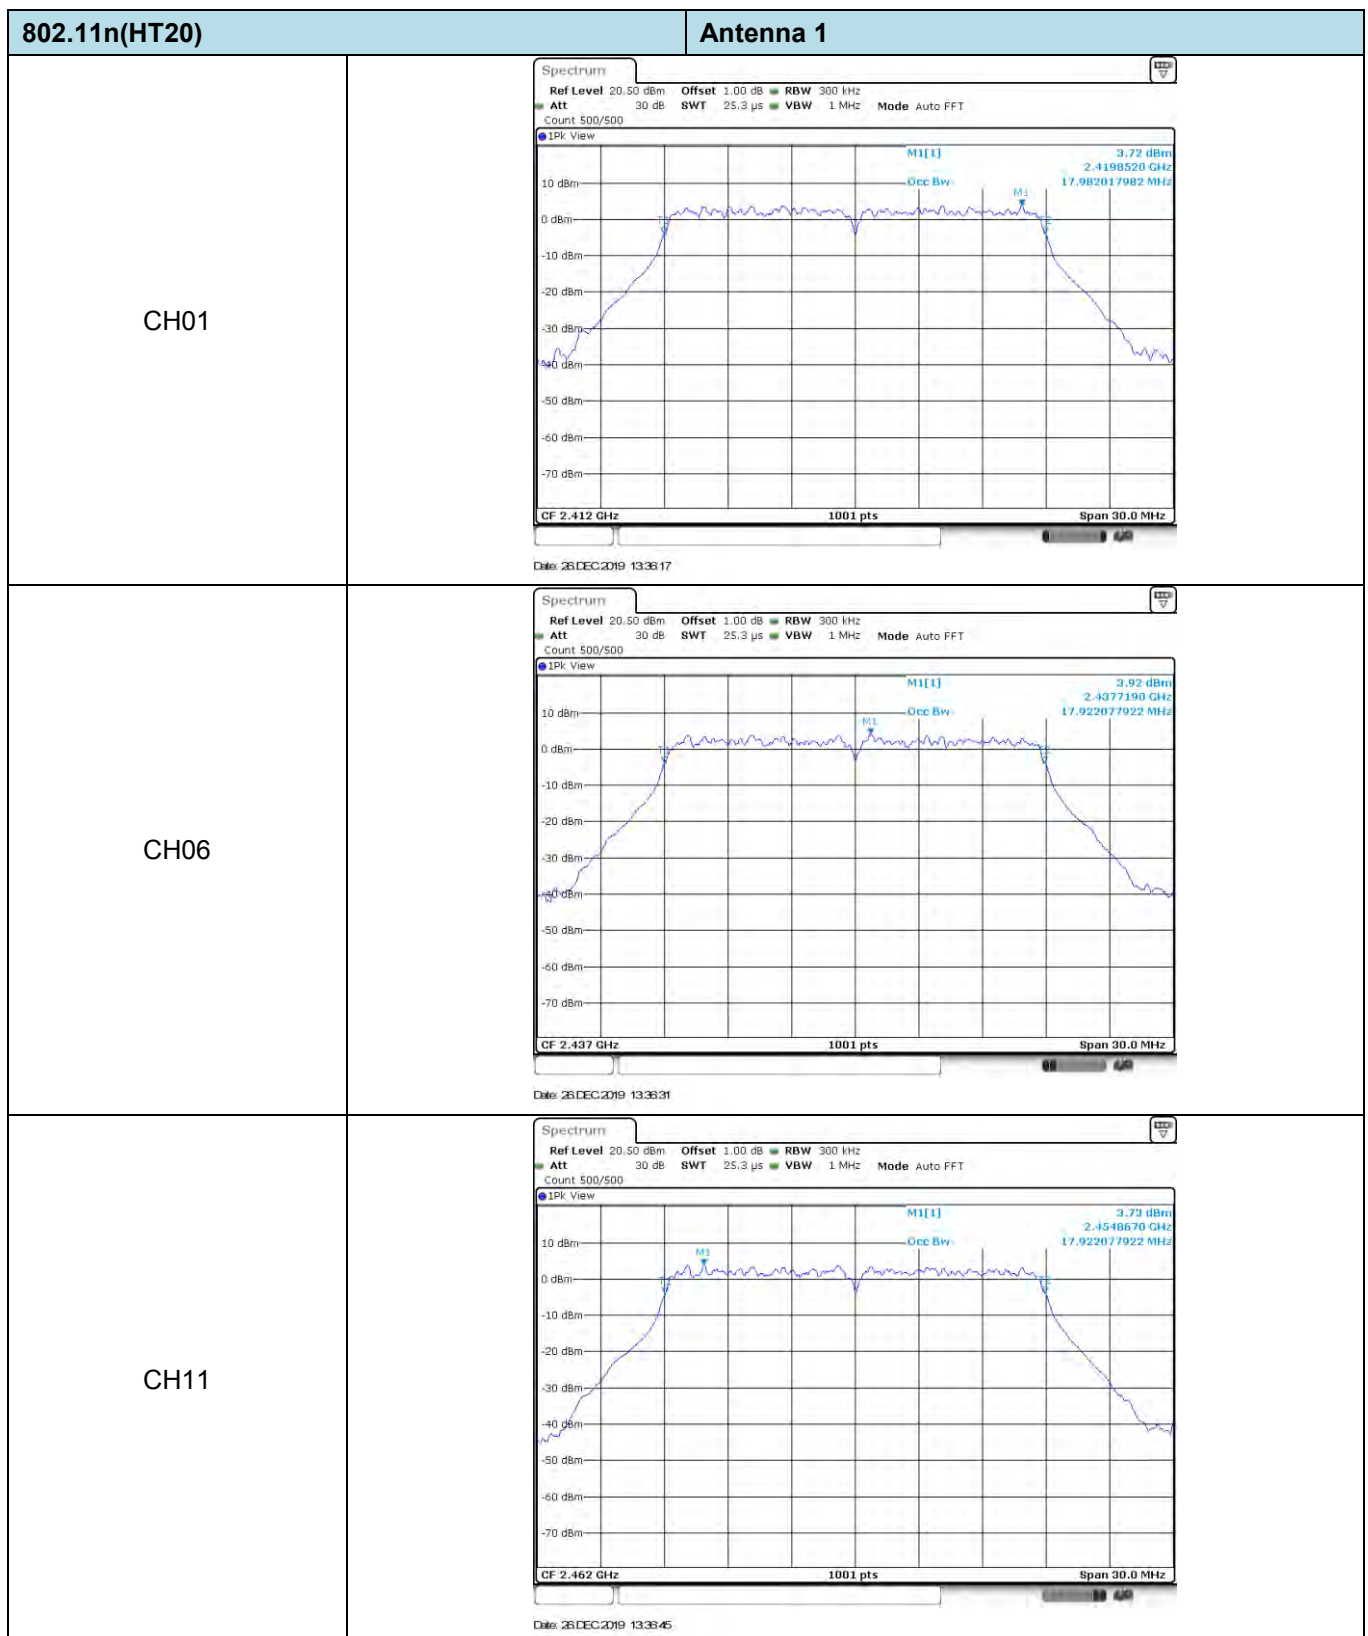


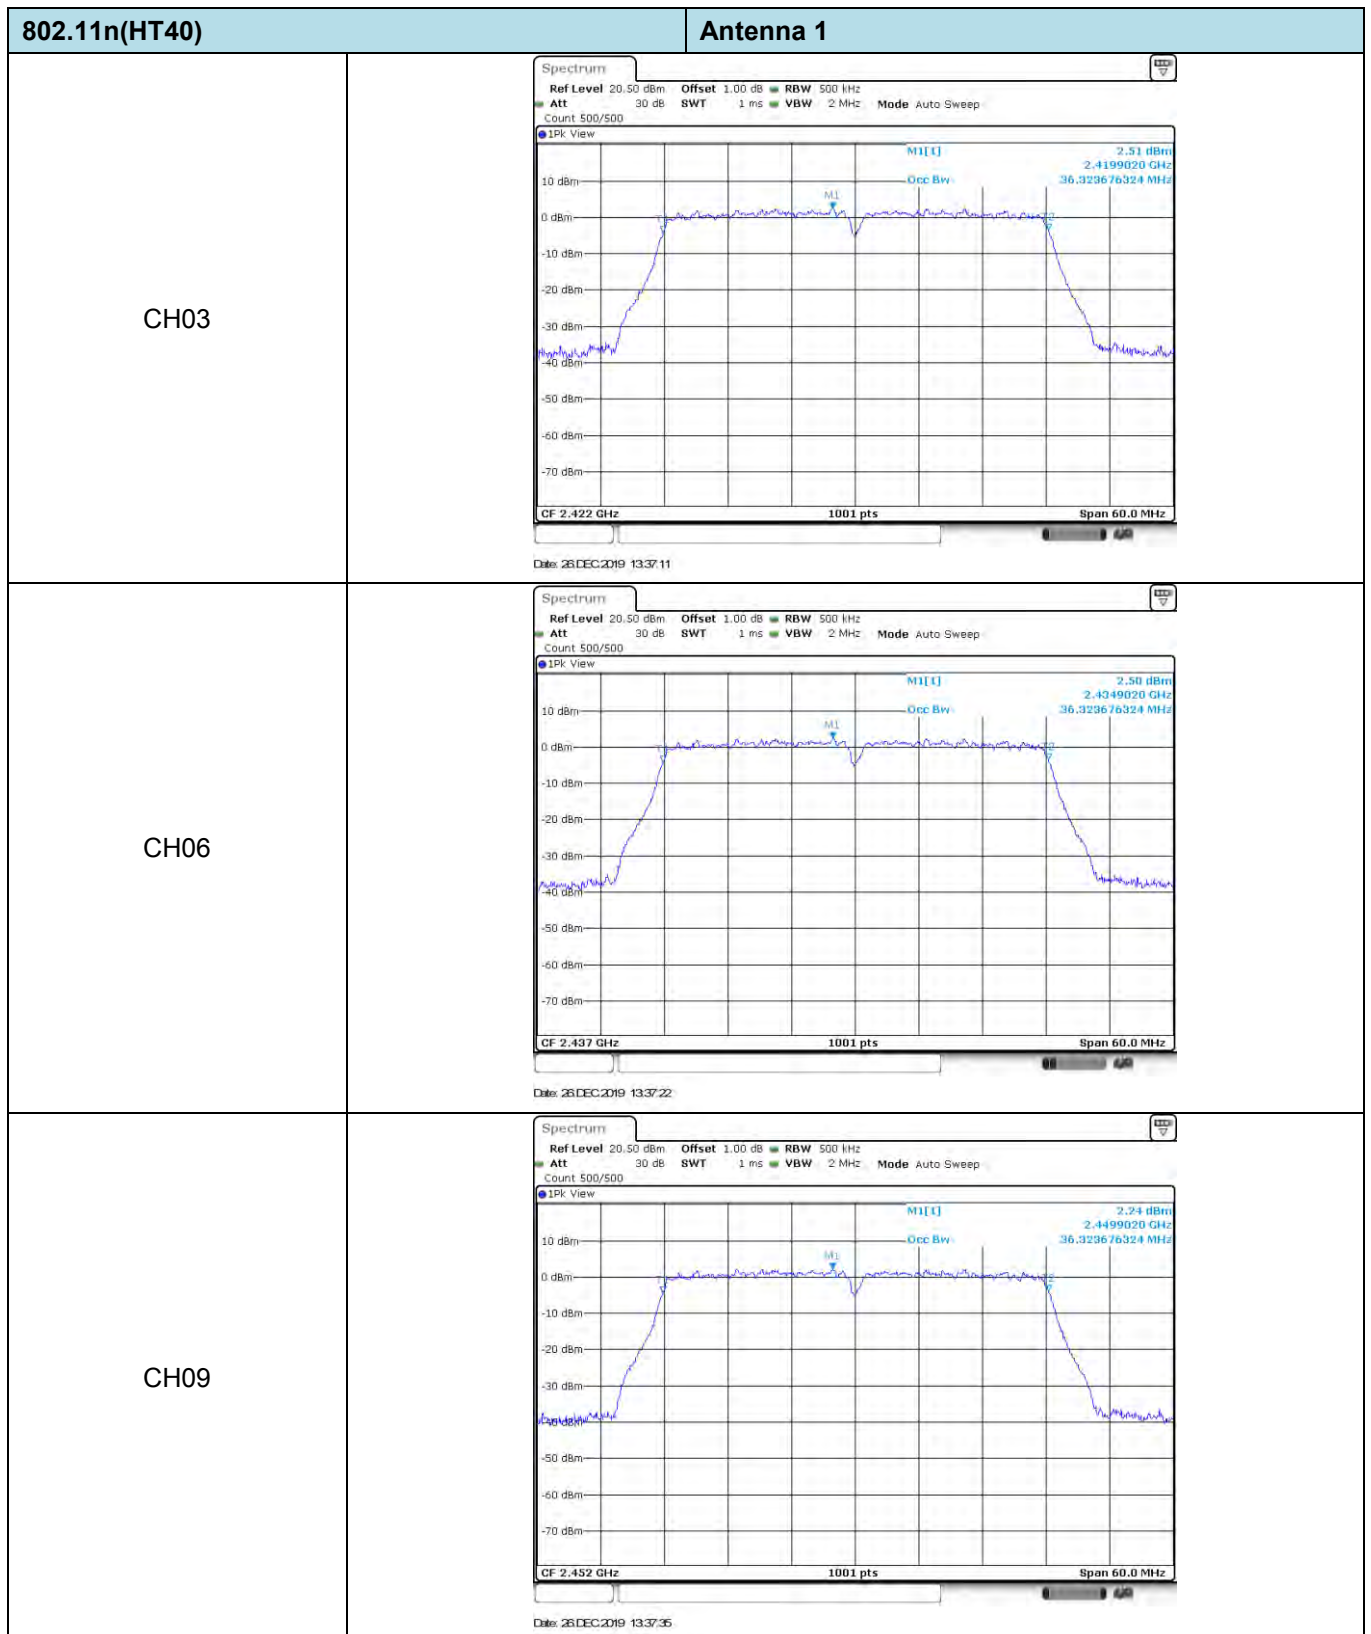

Appendix E: Duty Cycle

Modulation Type	Test Frequency (MHz)	T _{on time} for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on time} (kHz)
11b	2437	---	---	100%	---
11g	2437	---	---	100%	---
11n20	2437	---	---	100%	---
11n40	2437	---	---	100%	---

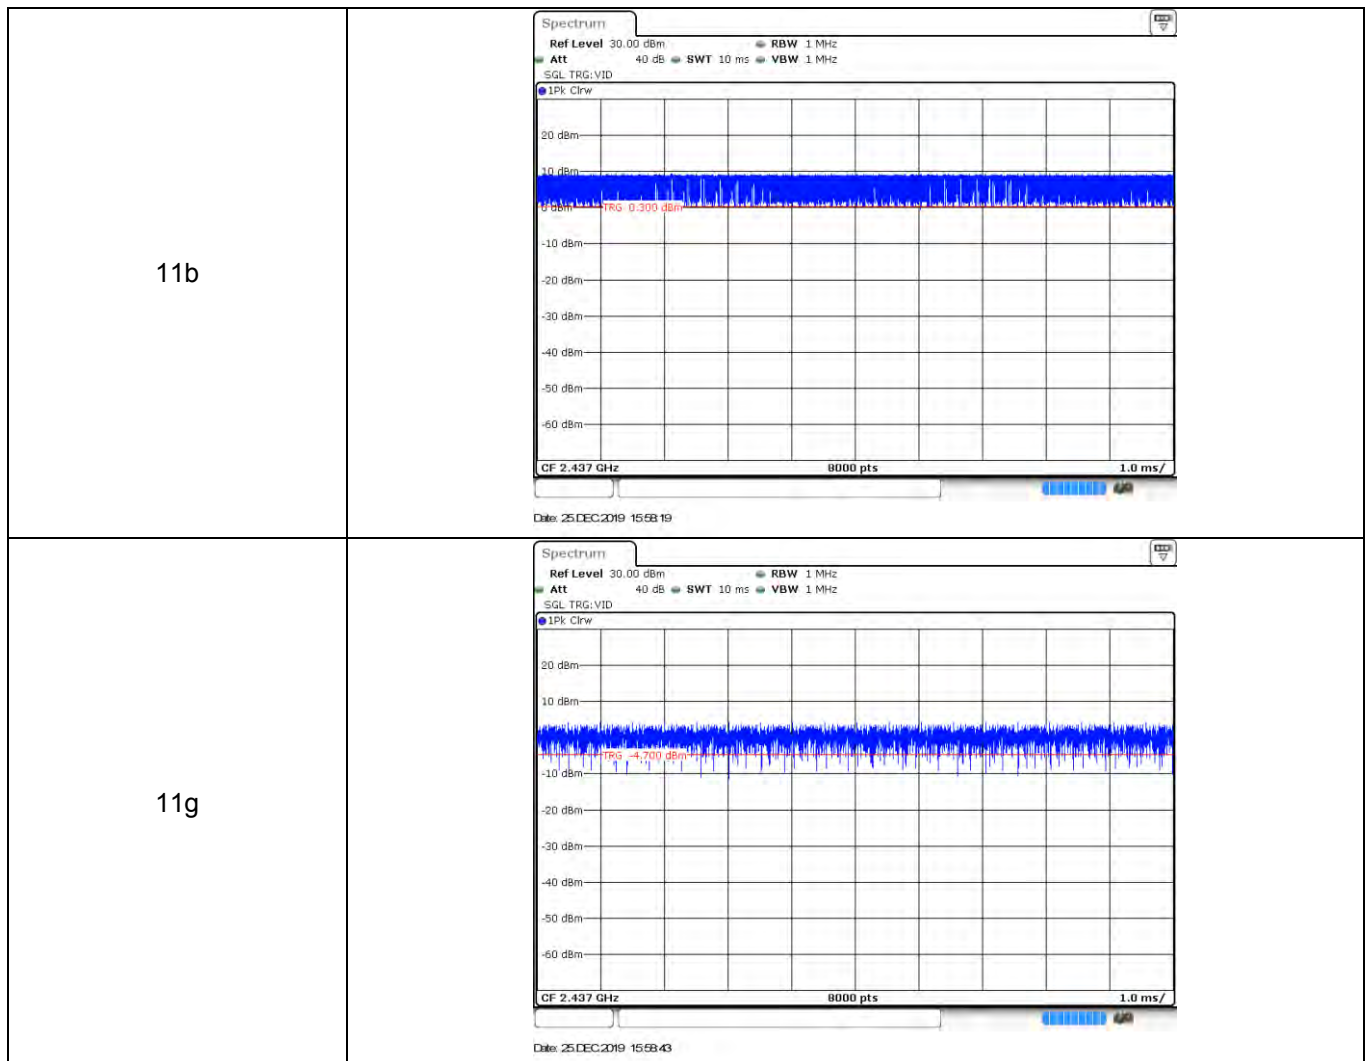

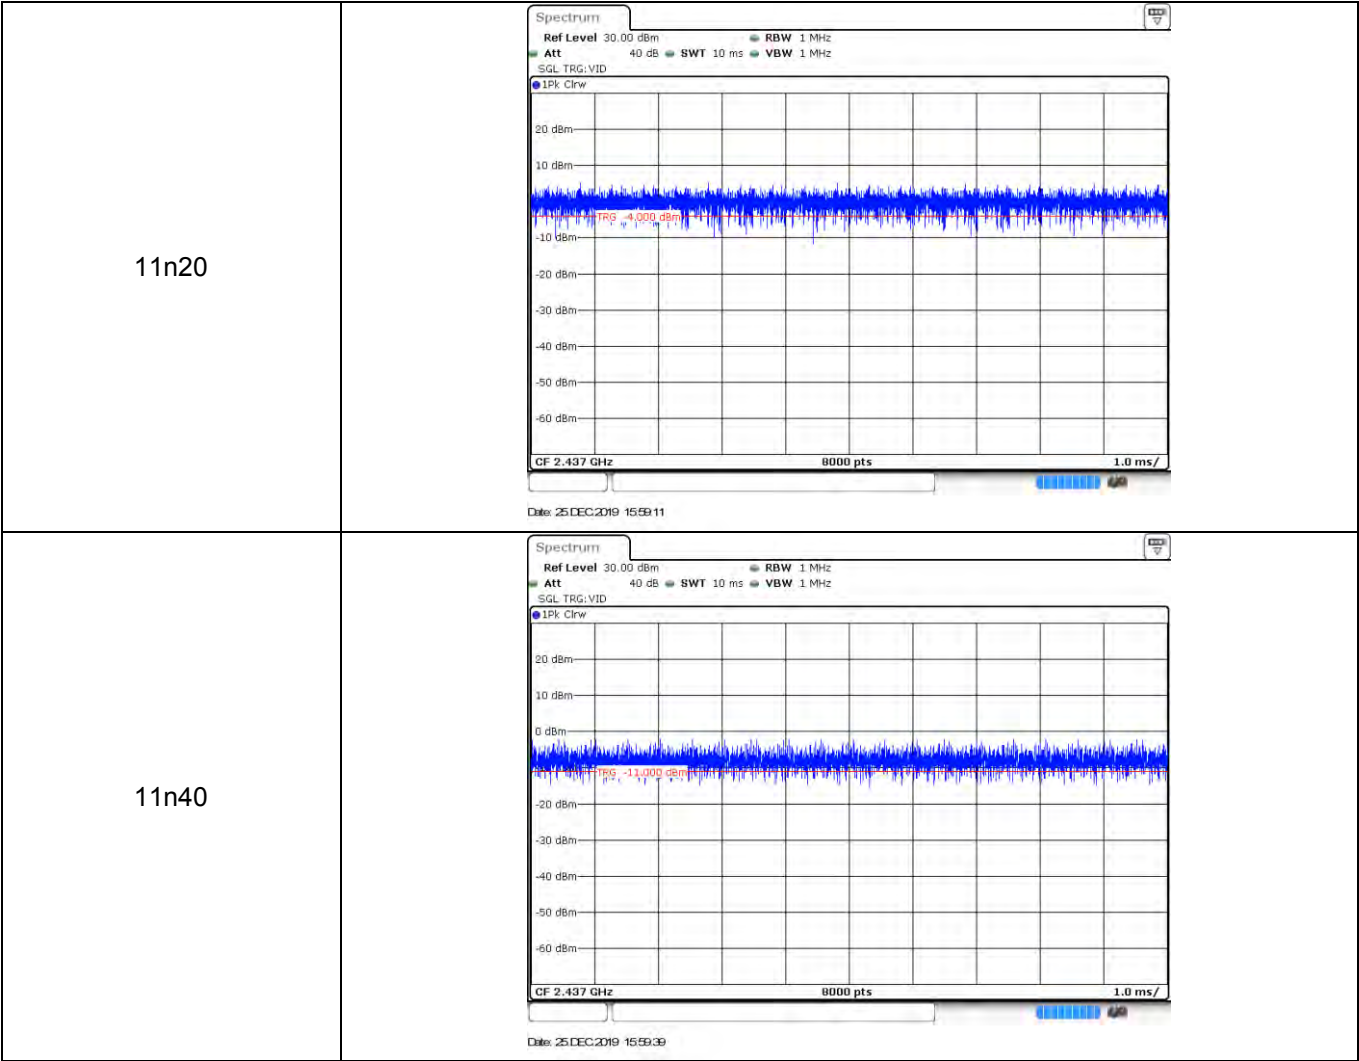

Appendix F: Band Edge and Spurious Emissions (Conducted)

Test Item:	Bandedge	802.11 b	Antenna 0																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 6.51 dBm 2.412520 GHz -30.36 dBm -55.73 dBm -58.49 dBm -28.84 dBm 01 -13.490 dBm Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41252 GHz</td><td>6.51 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-30.36 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-55.73 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.49 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.3996 GHz</td><td>-28.84 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 15:55:43			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41252 GHz	6.51 dBm			M2	1		2.4 GHz	-30.36 dBm			M3	1		2.39 GHz	-55.73 dBm			M4	1		2.31 GHz	-58.49 dBm			M5	1		2.3996 GHz	-28.84 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41252 GHz	6.51 dBm																																									
M2	1		2.4 GHz	-30.36 dBm																																									
M3	1		2.39 GHz	-55.73 dBm																																									
M4	1		2.31 GHz	-58.49 dBm																																									
M5	1		2.3996 GHz	-28.84 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 6.16 dBm 2.4614820 GHz -56.10 dBm -53.67 dBm 01 -13.840 dBm Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.461482 GHz</td><td>6.16 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-56.10 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-56.62 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4903304 GHz</td><td>-53.67 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 10:55:11			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.461482 GHz	6.16 dBm			M2	1		2.4835 GHz	-56.10 dBm			M3	1		2.5 GHz	-56.62 dBm			M4	1		2.4903304 GHz	-53.67 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.461482 GHz	6.16 dBm																																									
M2	1		2.4835 GHz	-56.10 dBm																																									
M3	1		2.5 GHz	-56.62 dBm																																									
M4	1		2.4903304 GHz	-53.67 dBm																																									


Test Item:	Bandedge	802.11 g	Antenna 0																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 -2.82 dBm 2.416080 GHz -36.04 dBm 2.400000 GHz Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41608 GHz</td><td>-2.82 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-36.04 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-54.38 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-59.00 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399925 GHz</td><td>-36.69 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 10:57:07			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41608 GHz	-2.82 dBm			M2	1		2.4 GHz	-36.04 dBm			M3	1		2.39 GHz	-54.38 dBm			M4	1		2.31 GHz	-59.00 dBm			M5	1		2.399925 GHz	-36.69 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41608 GHz	-2.82 dBm																																									
M2	1		2.4 GHz	-36.04 dBm																																									
M3	1		2.39 GHz	-54.38 dBm																																									
M4	1		2.31 GHz	-59.00 dBm																																									
M5	1		2.399925 GHz	-36.69 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2[1] M3 M4 -2.82 dBm 2.4594670 GHz -54.45 dBm 2.4935000 GHz Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.459467 GHz</td><td>-2.82 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-54.45 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-57.13 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4870609 GHz</td><td>-53.47 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:00:16			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.459467 GHz	-2.82 dBm			M2	1		2.4835 GHz	-54.45 dBm			M3	1		2.5 GHz	-57.13 dBm			M4	1		2.4870609 GHz	-53.47 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.459467 GHz	-2.82 dBm																																									
M2	1		2.4835 GHz	-54.45 dBm																																									
M3	1		2.5 GHz	-57.13 dBm																																									
M4	1		2.4870609 GHz	-53.47 dBm																																									

Test Item:	Bandedge	802.11 n(HT20)	Antenna 0																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 -2.76 dBm 2.406520 GHz -34.24 dBm 2.399925 GHz -58.41 dBm 2.31 GHz -35.50 dBm Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.40652 GHz</td><td>-2.76 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-34.24 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-54.07 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.41 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399925 GHz</td><td>-35.50 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:02:07			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40652 GHz	-2.76 dBm			M2	1		2.4 GHz	-34.24 dBm			M3	1		2.39 GHz	-54.07 dBm			M4	1		2.31 GHz	-58.41 dBm			M5	1		2.399925 GHz	-35.50 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40652 GHz	-2.76 dBm																																									
M2	1		2.4 GHz	-34.24 dBm																																									
M3	1		2.39 GHz	-54.07 dBm																																									
M4	1		2.31 GHz	-58.41 dBm																																									
M5	1		2.399925 GHz	-35.50 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 -2.36 dBm 2.4591200 GHz -54.07 dBm 2.4847652 GHz -52.78 dBm Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.45912 GHz</td><td>-2.36 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-54.07 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-56.42 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4847652 GHz</td><td>-52.78 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:08:59			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.45912 GHz	-2.36 dBm			M2	1		2.4835 GHz	-54.07 dBm			M3	1		2.5 GHz	-56.42 dBm			M4	1		2.4847652 GHz	-52.78 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.45912 GHz	-2.36 dBm																																									
M2	1		2.4835 GHz	-54.07 dBm																																									
M3	1		2.5 GHz	-56.42 dBm																																									
M4	1		2.4847652 GHz	-52.78 dBm																																									

Test Item:	Bandedge	802.11 n(HT40)	Antenna 0																																										
CH03	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 303.4 μs VBW 300 kHz Mode Auto FFT Count 299/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 -6.92 dBm 2.420510 GHz -35.78 dBm 2.400000 GHz -26.620 dBm Start 2.31 GHz 691 pts Stop 2.442 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.42051 GHz</td><td>-6.92 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-35.73 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-54.85 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-57.52 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399913 GHz</td><td>-40.13 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:11:20			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.42051 GHz	-6.92 dBm			M2	1		2.4 GHz	-35.73 dBm			M3	1		2.39 GHz	-54.85 dBm			M4	1		2.31 GHz	-57.52 dBm			M5	1		2.399913 GHz	-40.13 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.42051 GHz	-6.92 dBm																																									
M2	1		2.4 GHz	-35.73 dBm																																									
M3	1		2.39 GHz	-54.85 dBm																																									
M4	1		2.31 GHz	-57.52 dBm																																									
M5	1		2.399913 GHz	-40.13 dBm																																									
CH09	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 -6.31 dBm 2.4442520 GHz -50.67 dBm 2.4835000 GHz -26.310 dBm Start 2.432 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.444252 GHz</td><td>-6.31 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-50.67 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-51.42 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4845275 GHz</td><td>-49.47 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:14:32			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.444252 GHz	-6.31 dBm			M2	1		2.4835 GHz	-50.67 dBm			M3	1		2.5 GHz	-51.42 dBm			M4	1		2.4845275 GHz	-49.47 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.444252 GHz	-6.31 dBm																																									
M2	1		2.4835 GHz	-50.67 dBm																																									
M3	1		2.5 GHz	-51.42 dBm																																									
M4	1		2.4845275 GHz	-49.47 dBm																																									

Test Item:	Bandedge	802.11 b	Antenna 1																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 IPk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 7.02 dBm 2.410900 GHz 2.461482 GHz 0.1 -12.990 dBm Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>2.4109 GHz</td><td>7.02 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td>1</td><td>2.4 GHz</td><td>-29.09 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td>1</td><td>2.39 GHz</td><td>-55.02 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td>1</td><td>2.31 GHz</td><td>-59.68 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td>1</td><td>2.399925 GHz</td><td>-29.59 dBm</td><td></td><td></td></tr></table> Date: 25 DEC 2019 11:20:39			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	2.4109 GHz	7.02 dBm			M2	1	1	2.4 GHz	-29.09 dBm			M3	1	1	2.39 GHz	-55.02 dBm			M4	1	1	2.31 GHz	-59.68 dBm			M5	1	1	2.399925 GHz	-29.59 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1	1	2.4109 GHz	7.02 dBm																																									
M2	1	1	2.4 GHz	-29.09 dBm																																									
M3	1	1	2.39 GHz	-55.02 dBm																																									
M4	1	1	2.31 GHz	-59.68 dBm																																									
M5	1	1	2.399925 GHz	-29.59 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 IPk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 6.93 dBm 2.461482 GHz 2.4835000 GHz 0.1 -13.070 dBm Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>2.461482 GHz</td><td>6.93 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td>1</td><td>2.4835 GHz</td><td>-54.43 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td>1</td><td>2.5 GHz</td><td>-51.55 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td>1</td><td>2.4996522 GHz</td><td>-50.61 dBm</td><td></td><td></td></tr></table> Date: 25 DEC 2019 11:28:01			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	2.461482 GHz	6.93 dBm			M2	1	1	2.4835 GHz	-54.43 dBm			M3	1	1	2.5 GHz	-51.55 dBm			M4	1	1	2.4996522 GHz	-50.61 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1	1	2.461482 GHz	6.93 dBm																																									
M2	1	1	2.4835 GHz	-54.43 dBm																																									
M3	1	1	2.5 GHz	-51.55 dBm																																									
M4	1	1	2.4996522 GHz	-50.61 dBm																																									


Test Item:	Bandedge	802.11 g	Antenna 1																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 -3.17 dBm -35.61 dBm -52.71 dBm 2.416080 GHz 2.480000 GHz 2.400000 GHz Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41608 GHz</td><td>-3.17 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-35.61 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-52.71 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.23 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399925 GHz</td><td>-37.05 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:30:49			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41608 GHz	-3.17 dBm			M2	1		2.4 GHz	-35.61 dBm			M3	1		2.39 GHz	-52.71 dBm			M4	1		2.31 GHz	-58.23 dBm			M5	1		2.399925 GHz	-37.05 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41608 GHz	-3.17 dBm																																									
M2	1		2.4 GHz	-35.61 dBm																																									
M3	1		2.39 GHz	-52.71 dBm																																									
M4	1		2.31 GHz	-58.23 dBm																																									
M5	1		2.399925 GHz	-37.05 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2[1] M2 M4 -3.39 dBm -52.10 dBm -52.22 dBm -51.19 dBm 2.459467 GHz 2.483500 GHz 2.5 GHz 2.49955000 GHz Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.459467 GHz</td><td>-3.39 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-52.10 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-52.22 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4995522 GHz</td><td>-51.19 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 11:33:43			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.459467 GHz	-3.39 dBm			M2	1		2.4835 GHz	-52.10 dBm			M3	1		2.5 GHz	-52.22 dBm			M4	1		2.4995522 GHz	-51.19 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.459467 GHz	-3.39 dBm																																									
M2	1		2.4835 GHz	-52.10 dBm																																									
M3	1		2.5 GHz	-52.22 dBm																																									
M4	1		2.4995522 GHz	-51.19 dBm																																									

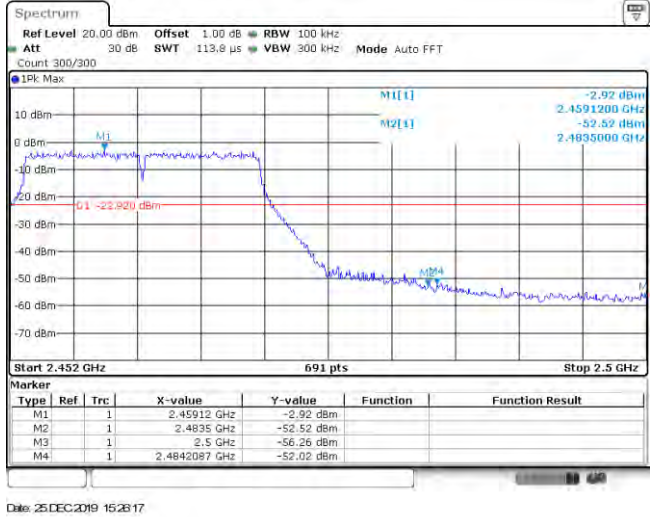Test Item:	Bandedge	802.11 n(HT20)	Antenna 1
CH01			
CH11			



Test Item:	Bandedge	802.11 n(HT40)	Antenna 1																																										
CH03	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.00 dB RBW 100 kHz SWT 303.4 μs VBW 300 kHz Mode Auto FFT Count 297/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 -5.63 dBm 2.414210 GHz -34.84 dBm 2.400000 GHz Start 2.31 GHz 691 pts Stop 2.442 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41421 GHz</td><td>-5.63 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-34.84 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-46.54 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.77 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399913 GHz</td><td>-39.59 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 15:31:14			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41421 GHz	-5.63 dBm			M2	1		2.4 GHz	-34.84 dBm			M3	1		2.39 GHz	-46.54 dBm			M4	1		2.31 GHz	-58.77 dBm			M5	1		2.399913 GHz	-39.59 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41421 GHz	-5.63 dBm																																									
M2	1		2.4 GHz	-34.84 dBm																																									
M3	1		2.39 GHz	-46.54 dBm																																									
M4	1		2.31 GHz	-58.77 dBm																																									
M5	1		2.399913 GHz	-39.59 dBm																																									
CH09	Spectrum Ref Level 20.00 dBm Att 30 dB Offset 1.00 dB RBW 100 kHz SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 -5.58 dBm 2.4554700 GHz -46.76 dBm 2.4035000 GHz Start 2.432 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.45547 GHz</td><td>-5.58 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-46.76 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-50.95 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4845275 GHz</td><td>-45.37 dBm</td><td></td><td></td></tr></tbody></table> Date: 25 DEC 2019 15:34:24			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.45547 GHz	-5.58 dBm			M2	1		2.4835 GHz	-46.76 dBm			M3	1		2.5 GHz	-50.95 dBm			M4	1		2.4845275 GHz	-45.37 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.45547 GHz	-5.58 dBm																																									
M2	1		2.4835 GHz	-46.76 dBm																																									
M3	1		2.5 GHz	-50.95 dBm																																									
M4	1		2.4845275 GHz	-45.37 dBm																																									


Test Item:	SE	802.11 b	Antenna 0
Reference levelCH01	Spectrum Ref Level 21.00 dBm Att 30 dB Count 100/100 Offset 1.00 dB SWT 75.9 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk Max 6.20 dBm 2.4124780 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.412 GHz 691 pts Span 30.0 MHz Date: 25 DEC 2019 10:51:04		
CH01	Spectrum Ref Level 20.00 dBm Att 30 dB Count 10/10 Offset 1.00 dB SWT 30.1 ms RBW 100 kHz VBW 300 kHz Mode Auto Sweep IPk Max -52.71 dBm 879.9520 MHz -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 25 DEC 2019 10:51:20		
	Spectrum Ref Level 20.00 dBm Att 30 dB Count 10/10 Offset 1.00 dB SWT 250 ms RBW 100 kHz VBW 300 kHz Mode Auto Sweep IPk Max -44.36 dBm 15.885000 GHz -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 25 DEC 2019 10:51:36		

Reference level CH06

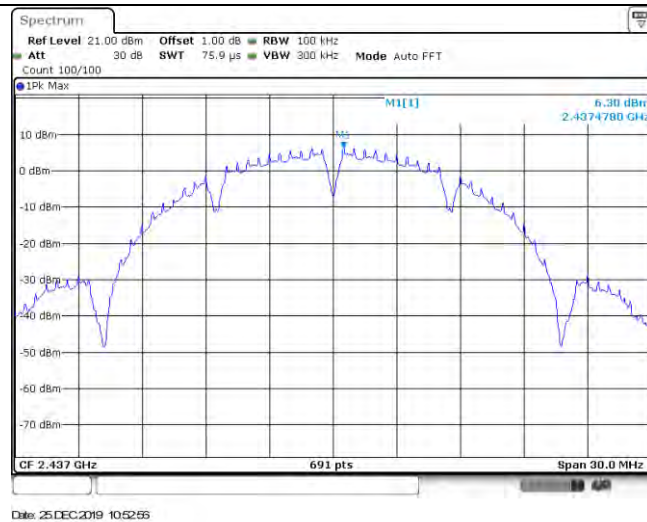


CH06

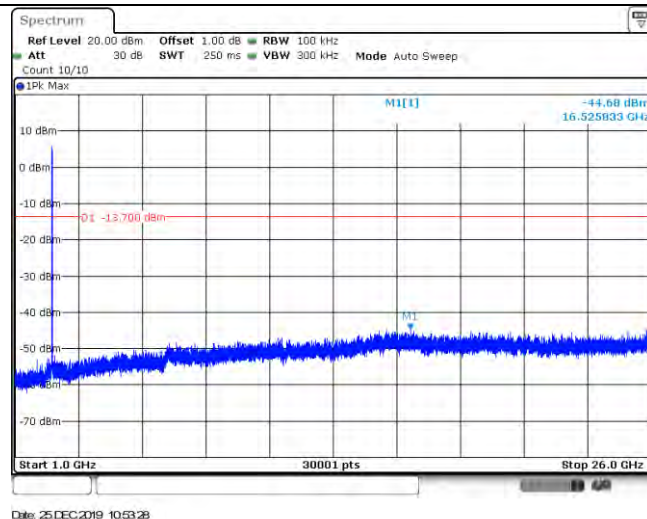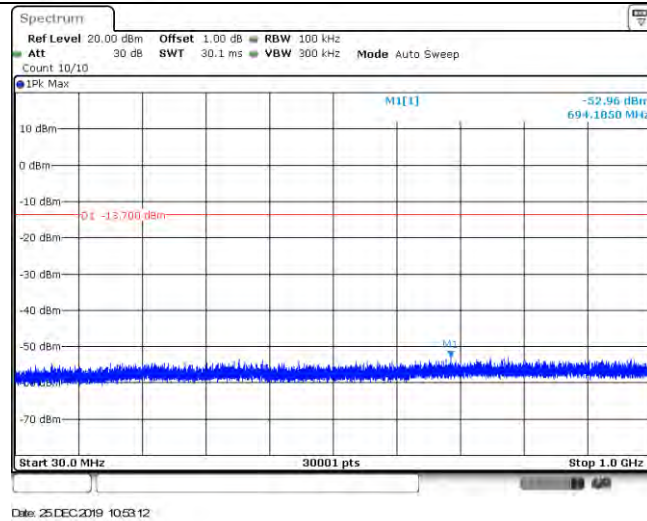


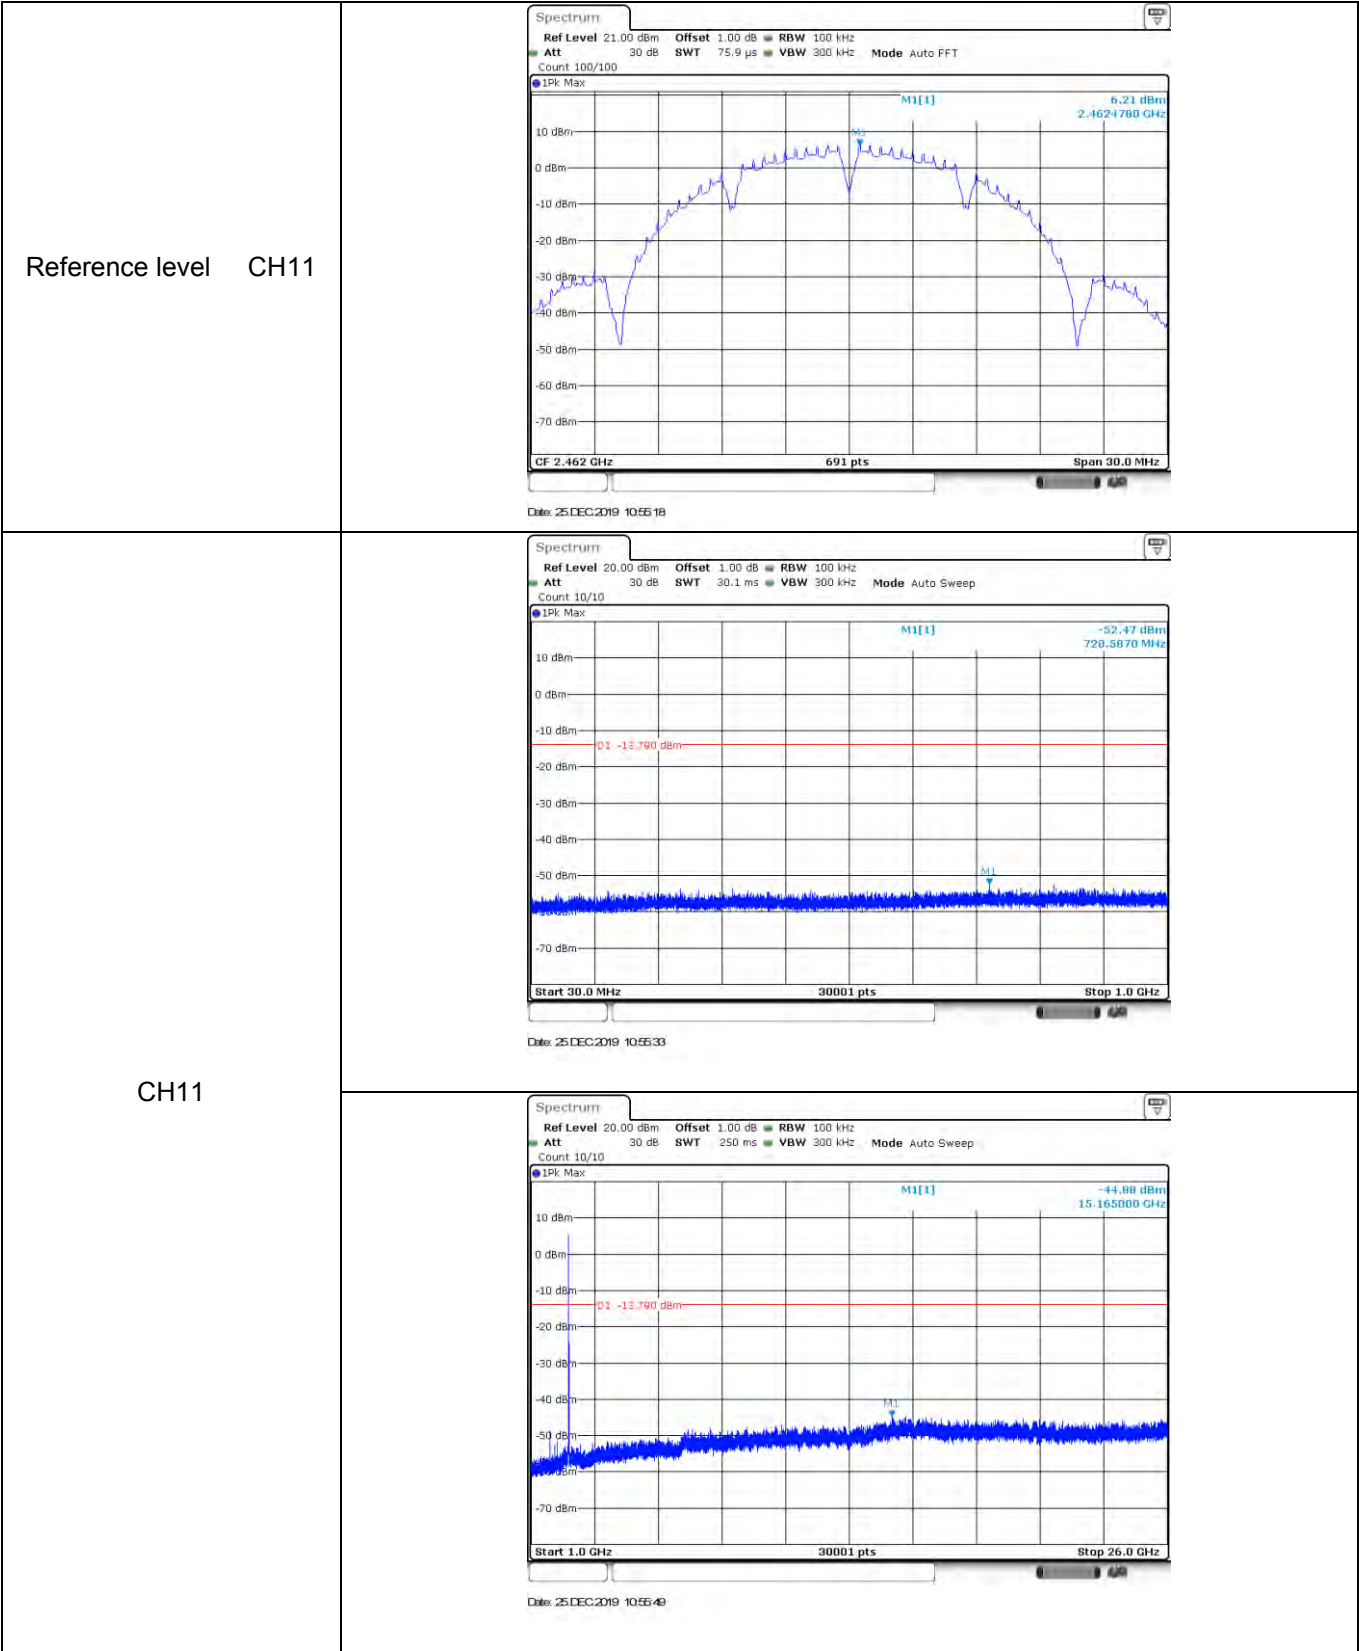



Test Item:	SE	802.11 g	Antenna 0
Reference level CH01	Spectrum Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.412 GHz 691 pts Span 30.0 MHz -2.88 dBm 2.4094620 GHz Date: 25 DEC 2019 10:57:14		
CH01	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz -52.99 dBm 770.5540 MHz -22.880 dBm Date: 25 DEC 2019 10:57:29		
	Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz -44.77 dBm 15.211667 GHz -22.880 dBm Date: 25 DEC 2019 10:57:45		

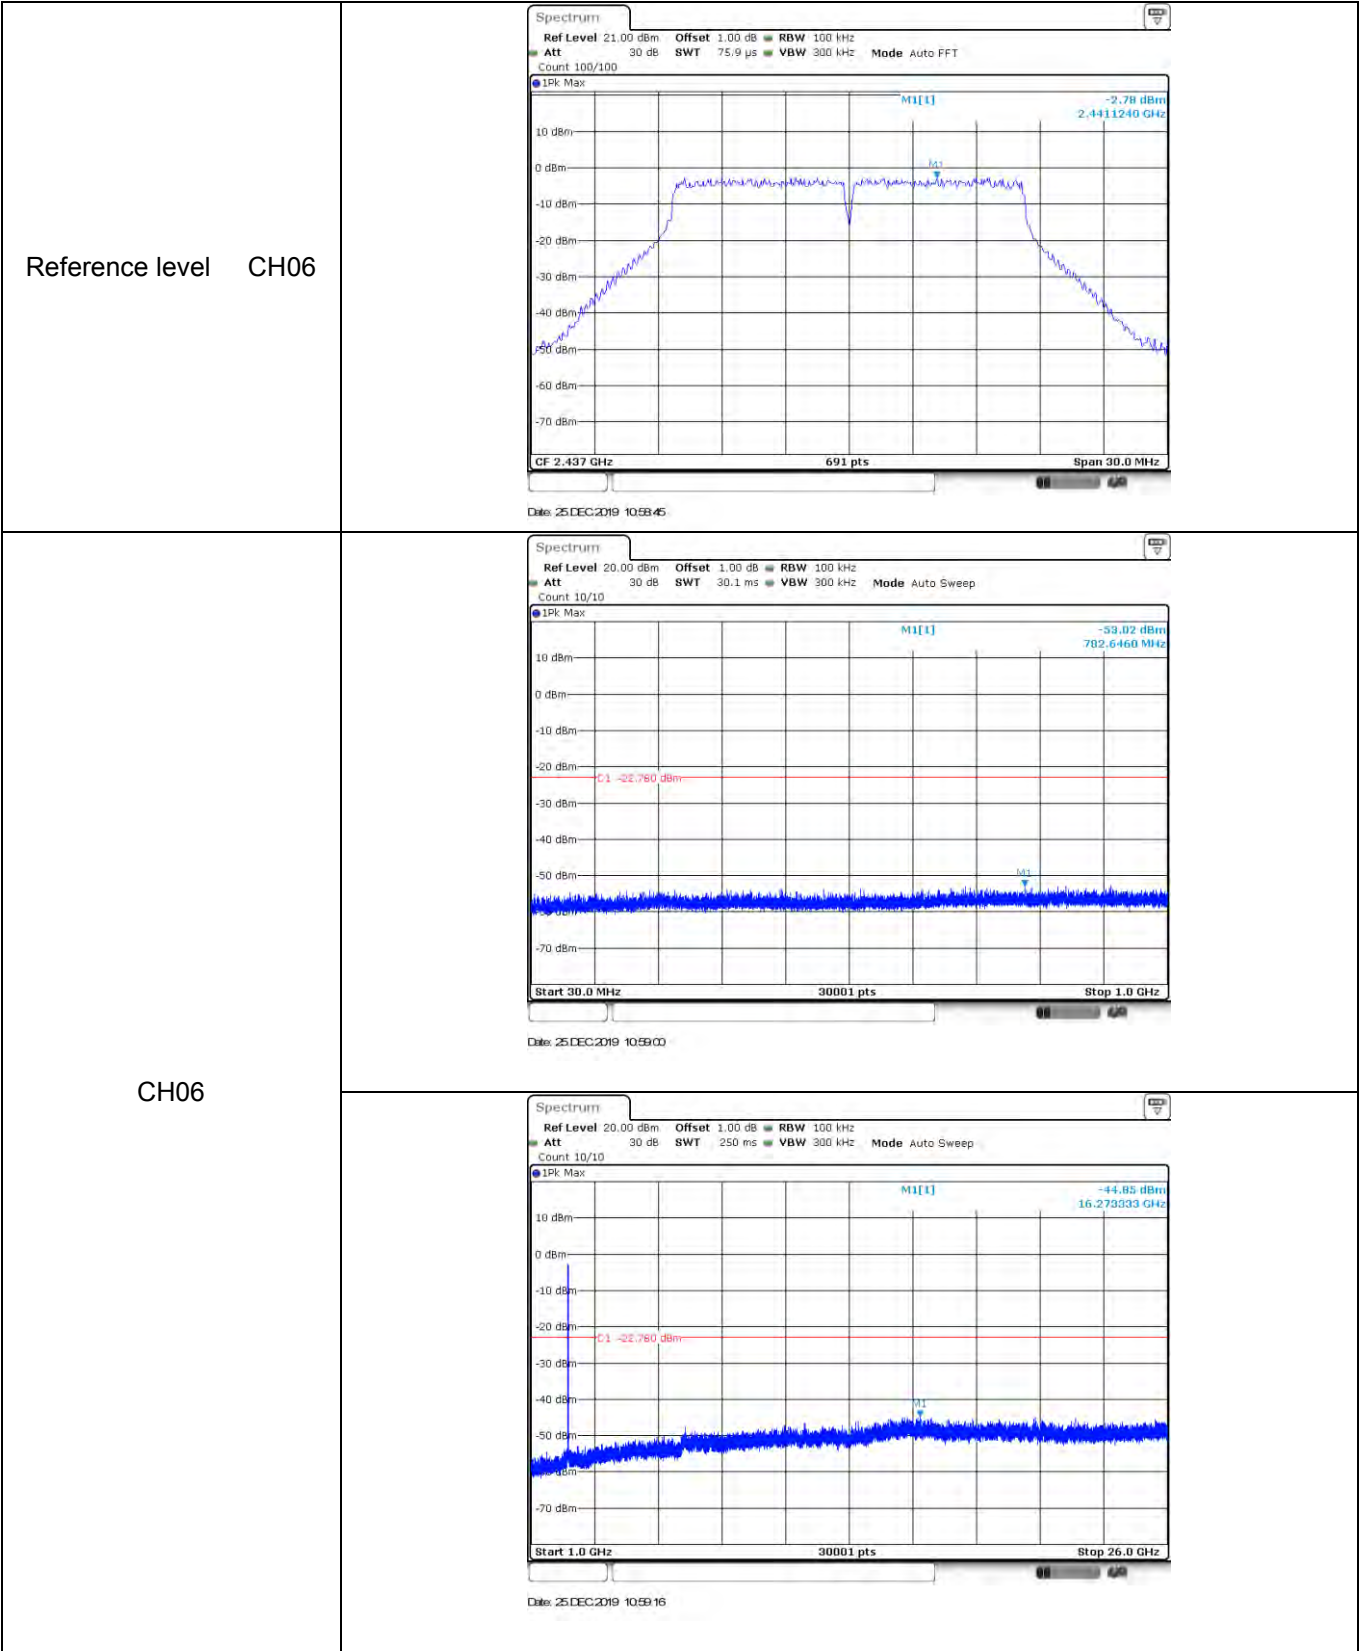


Reference level CH11

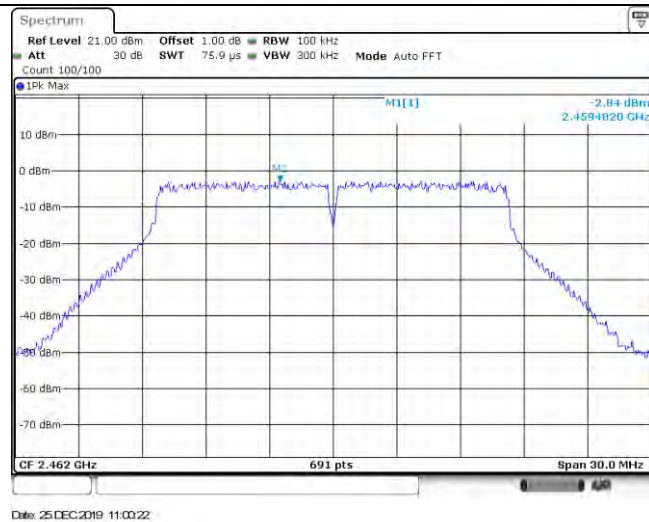

CH11

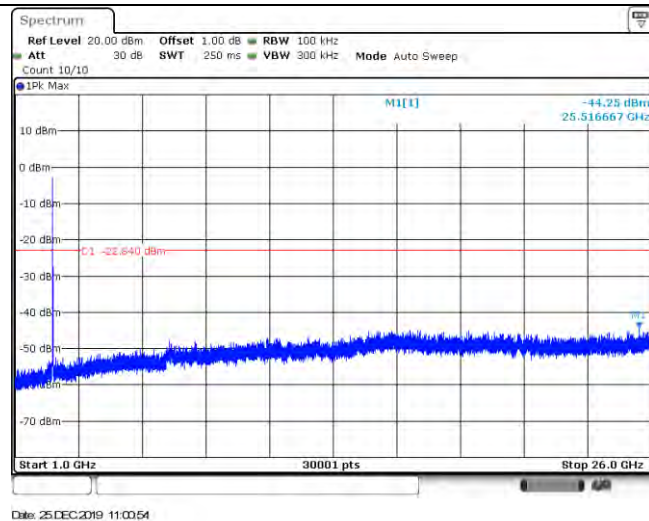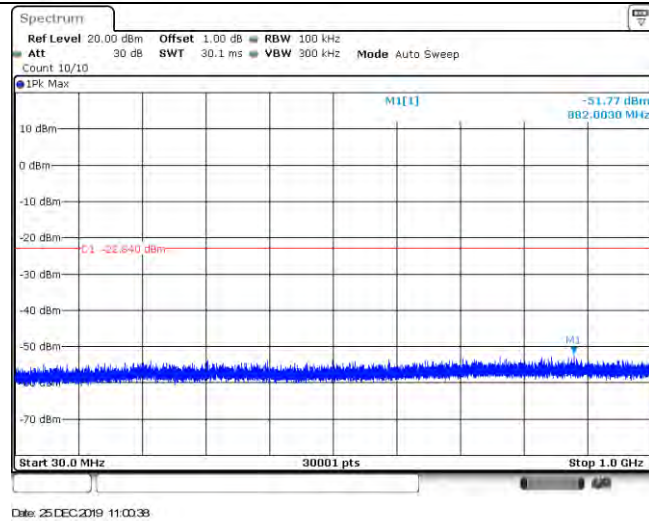


Reference level CH06

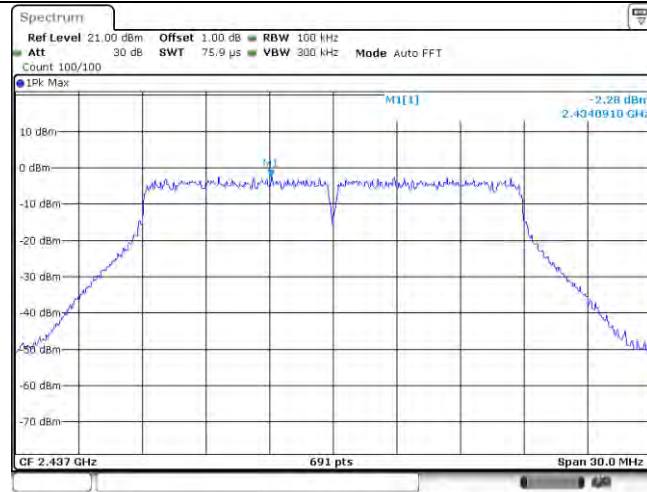


Date: 25 DEC 2019 11:07:19

CH06

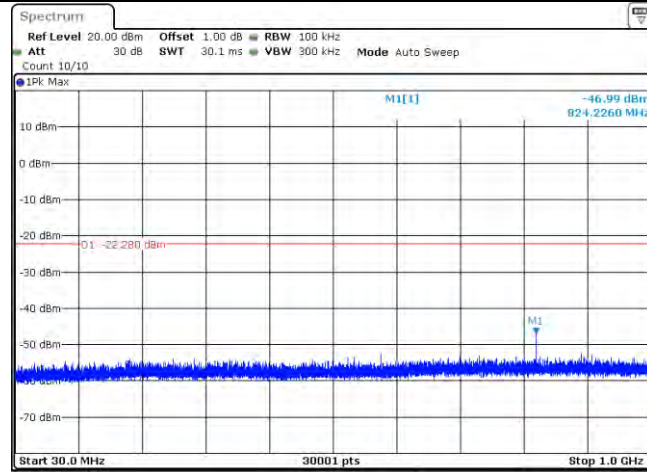


Date: 25 DEC 2019 11:07:34


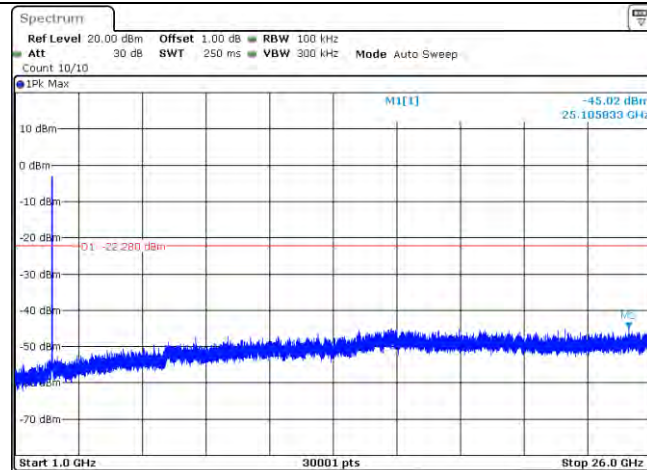





Date: 25 DEC 2019 11:07:50

Reference level CH11

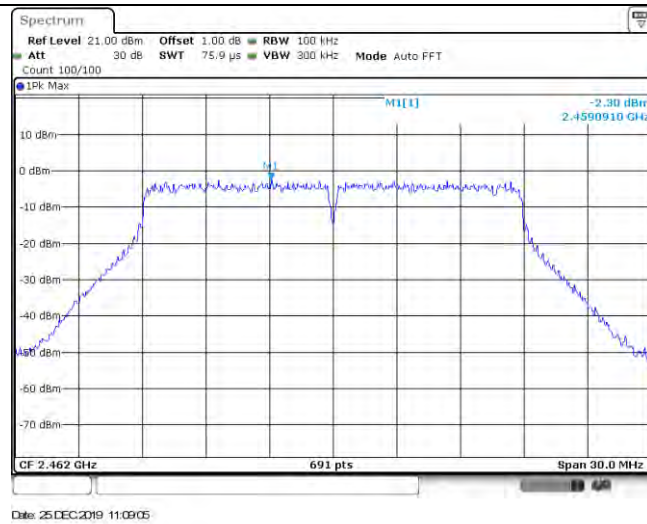


CH11

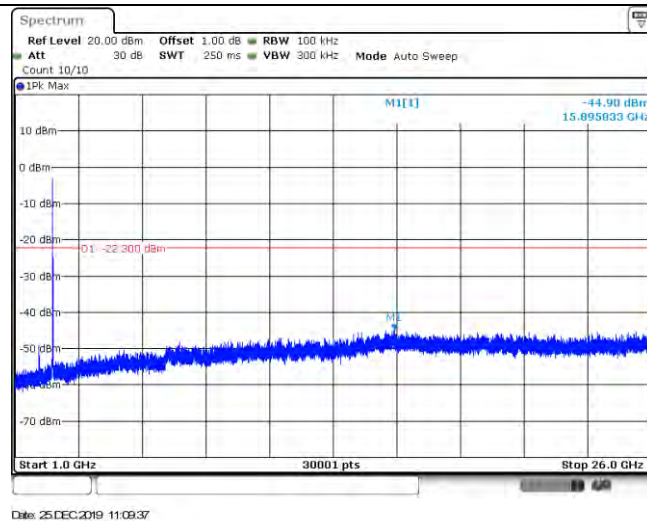
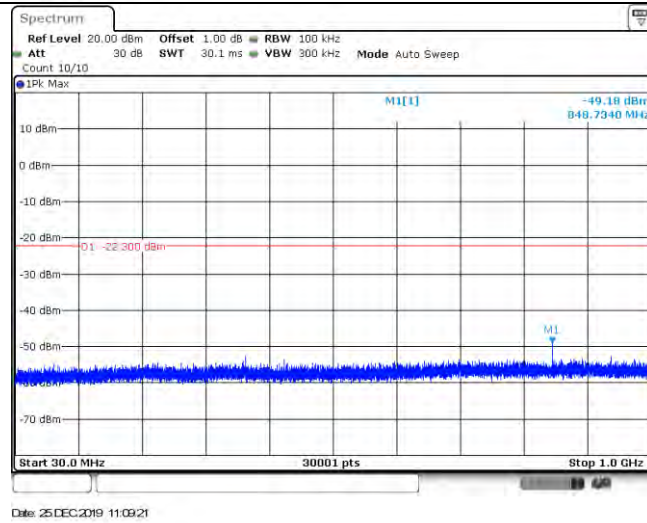


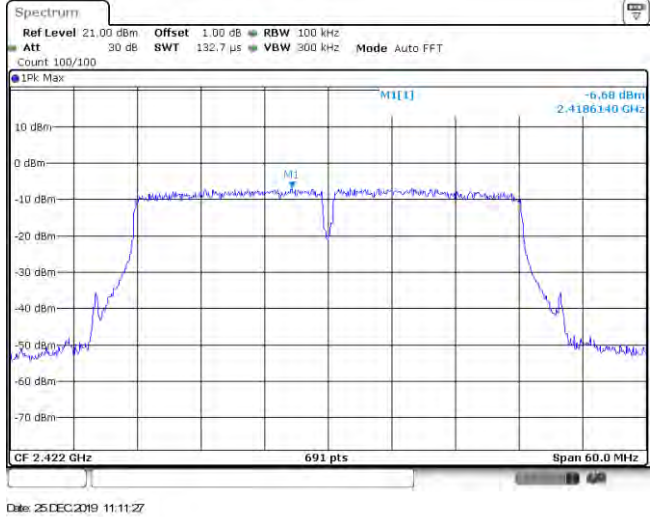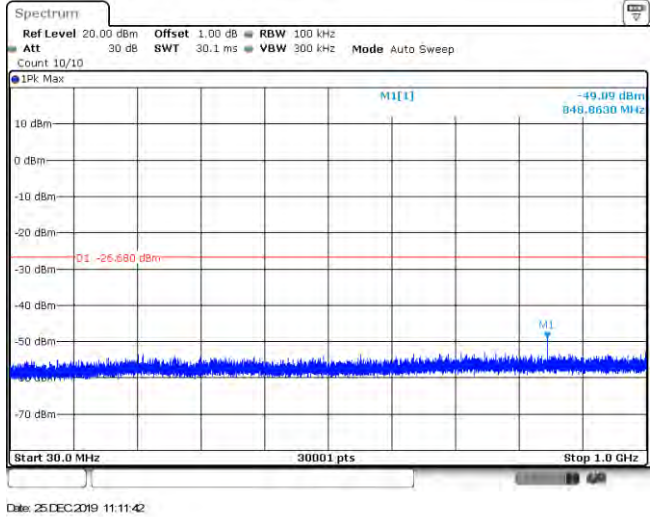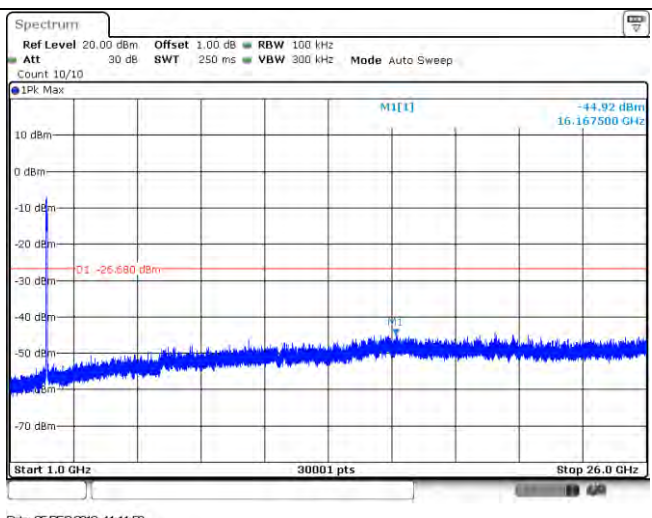
Test Item:	SE	802.11 n(HT40)	Antenna 0
Reference level CH03			
CH03			
			



Reference level CH06

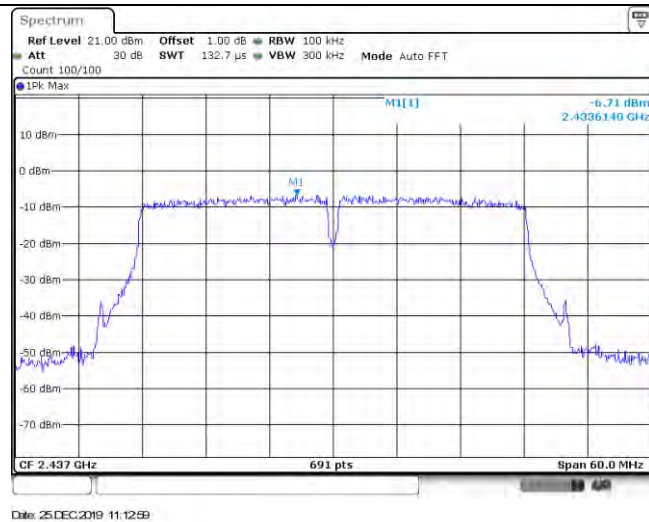



CH06


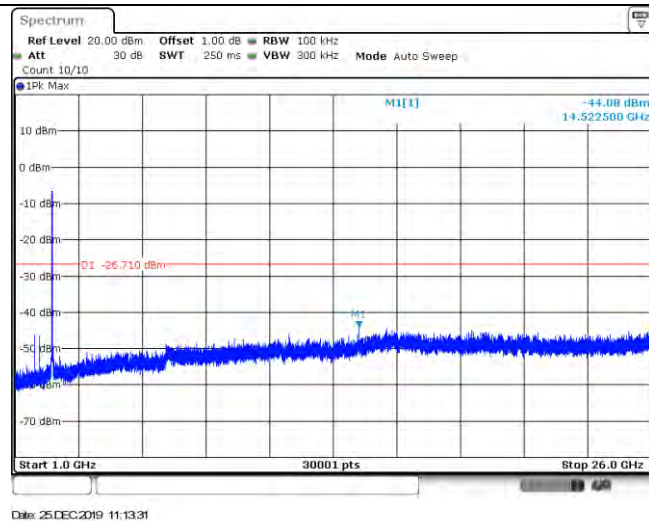
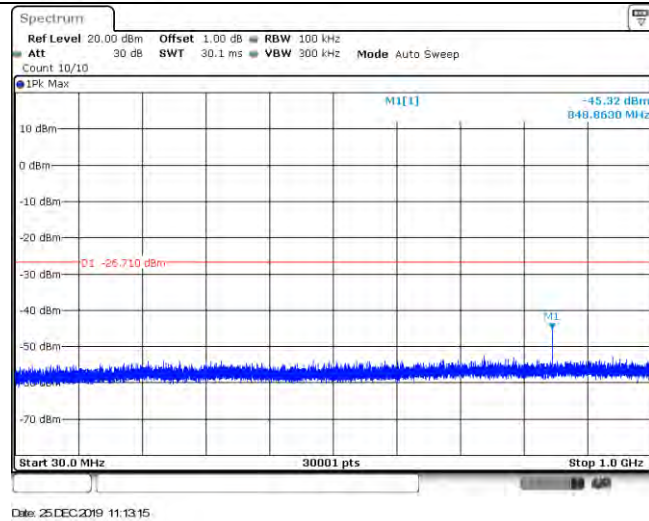


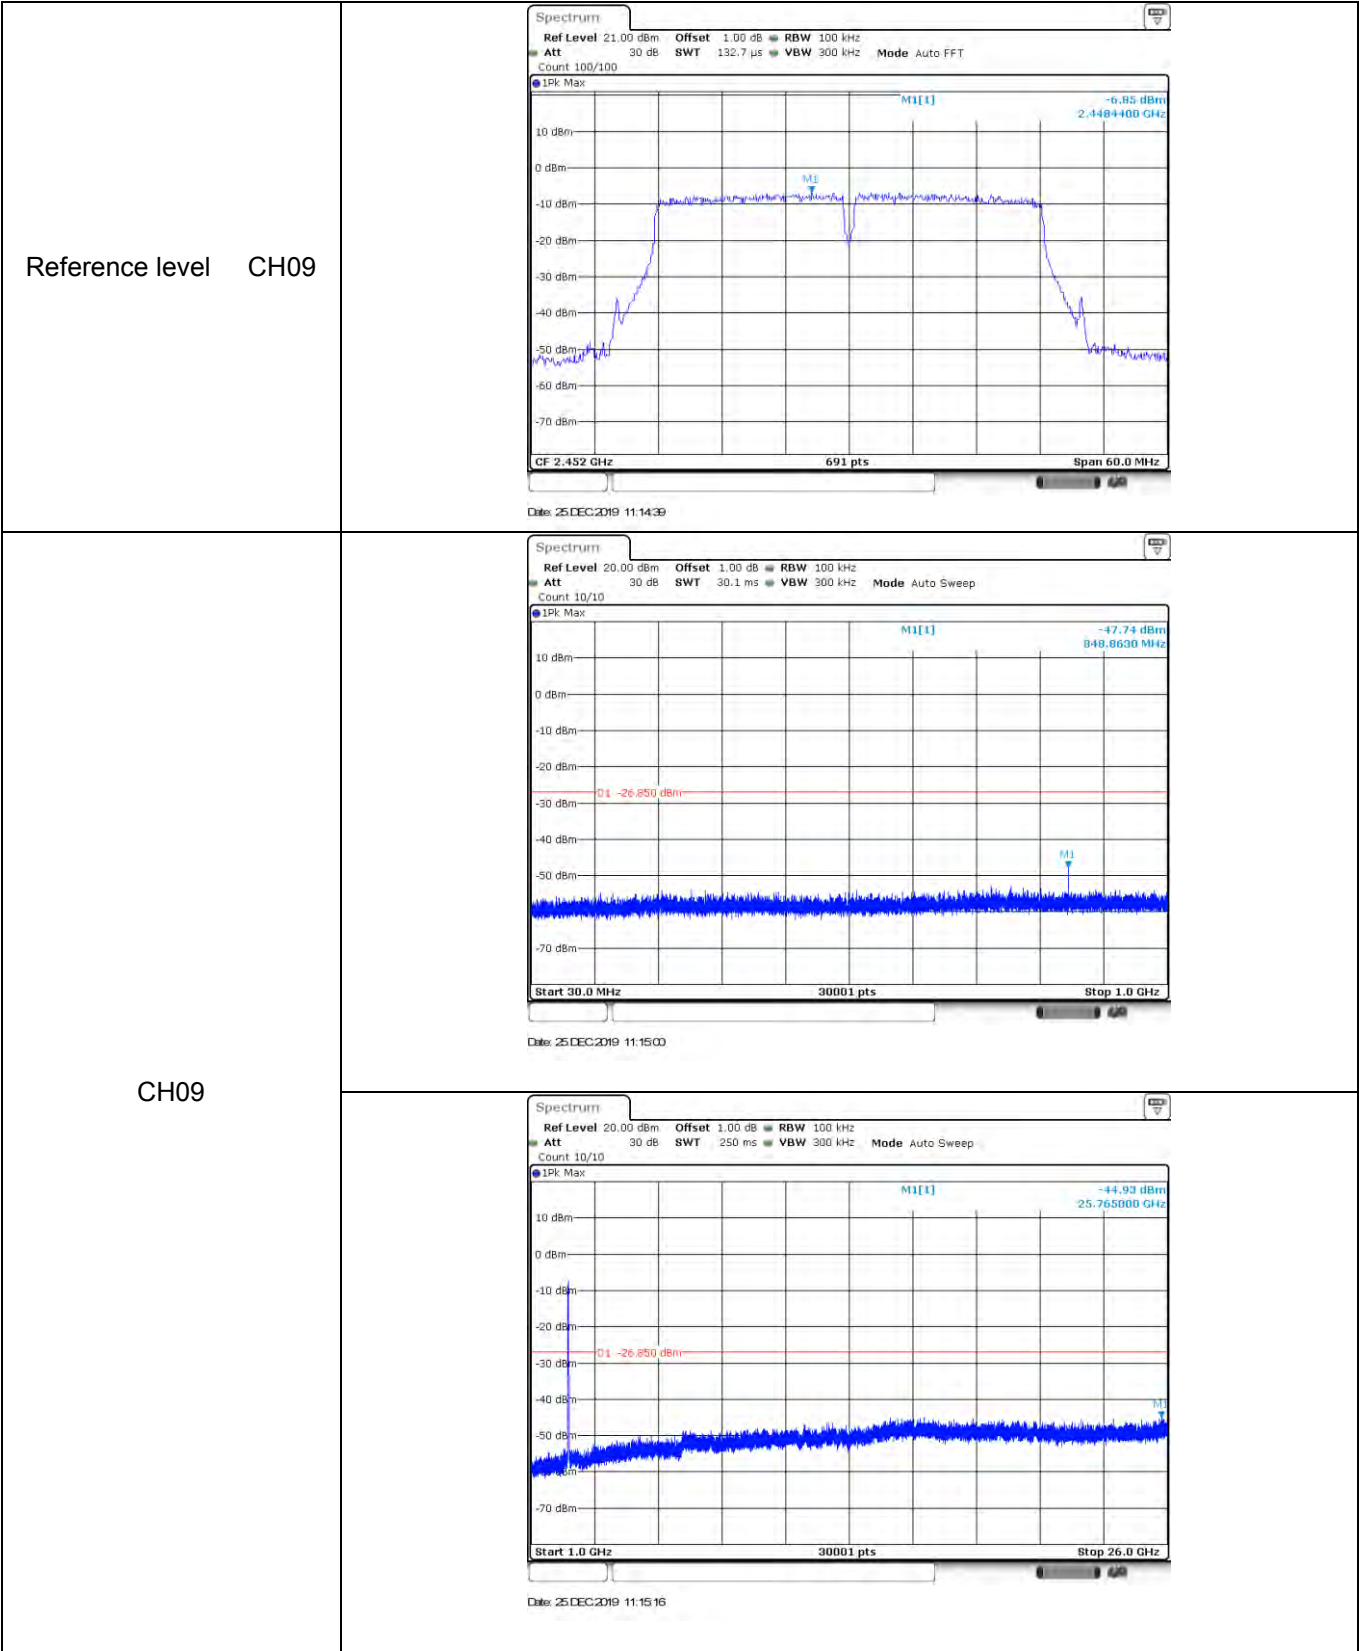

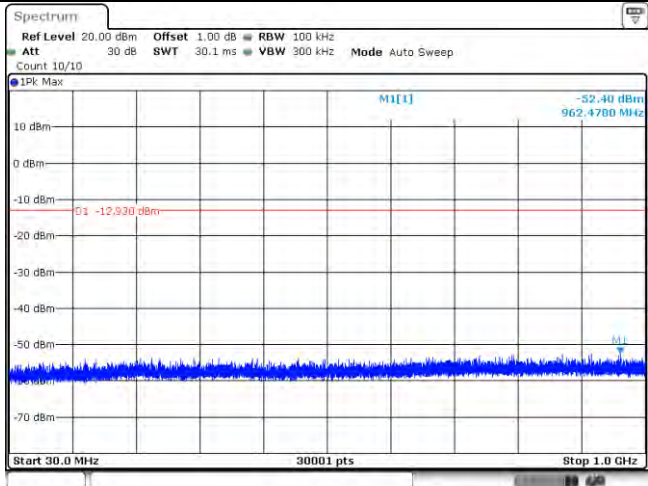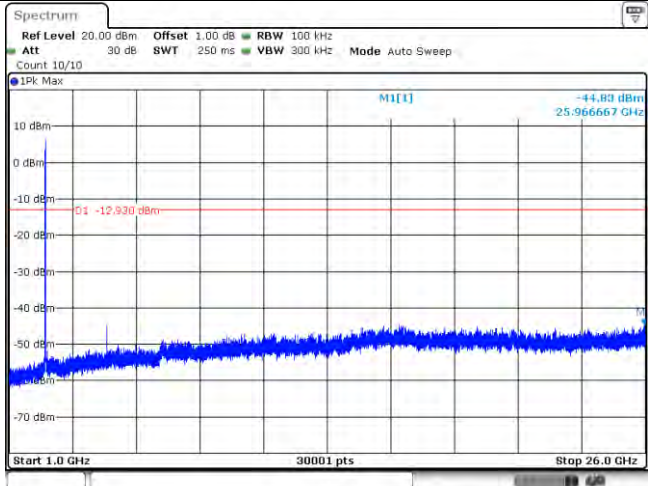
Test Item:	SE	802.11 b	Antenna 1
Reference level CH01			
CH01			
			

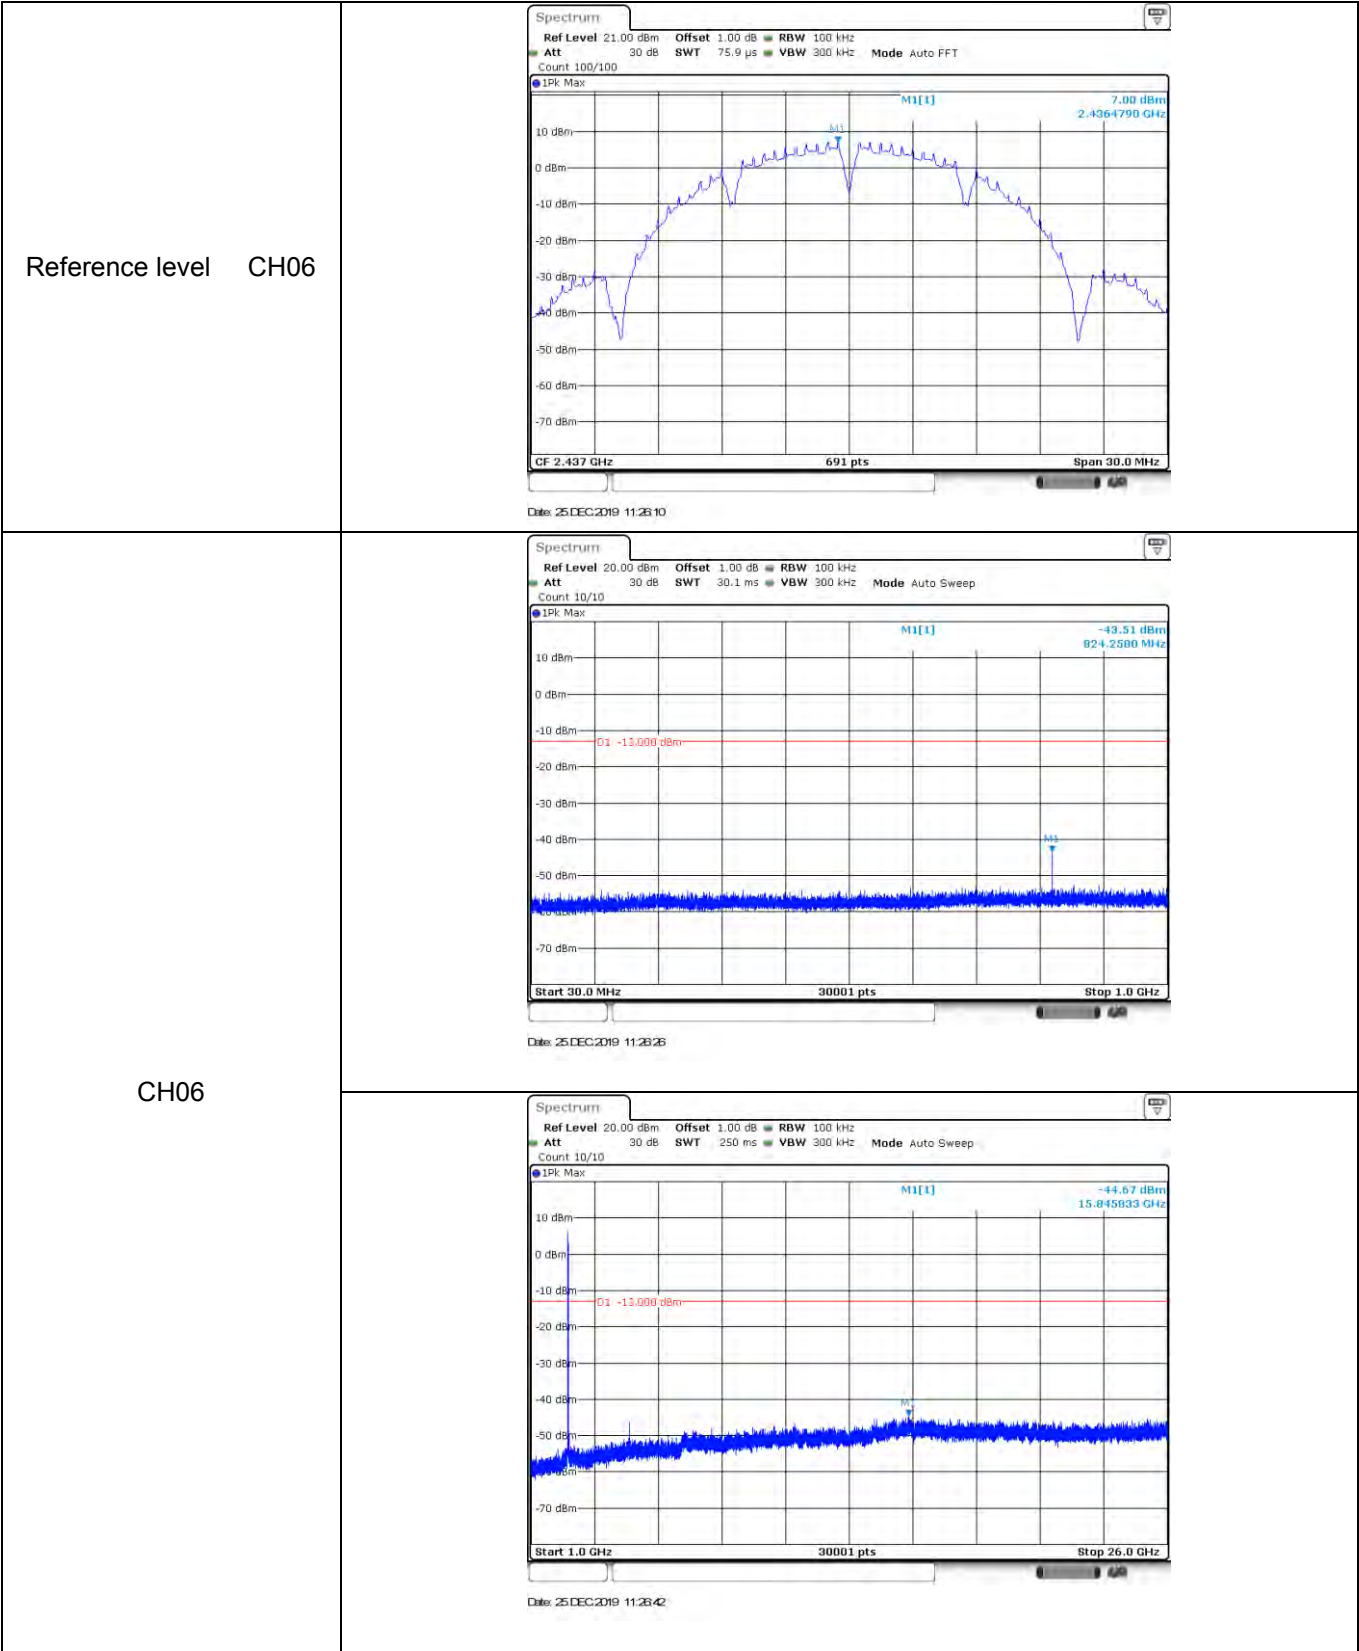


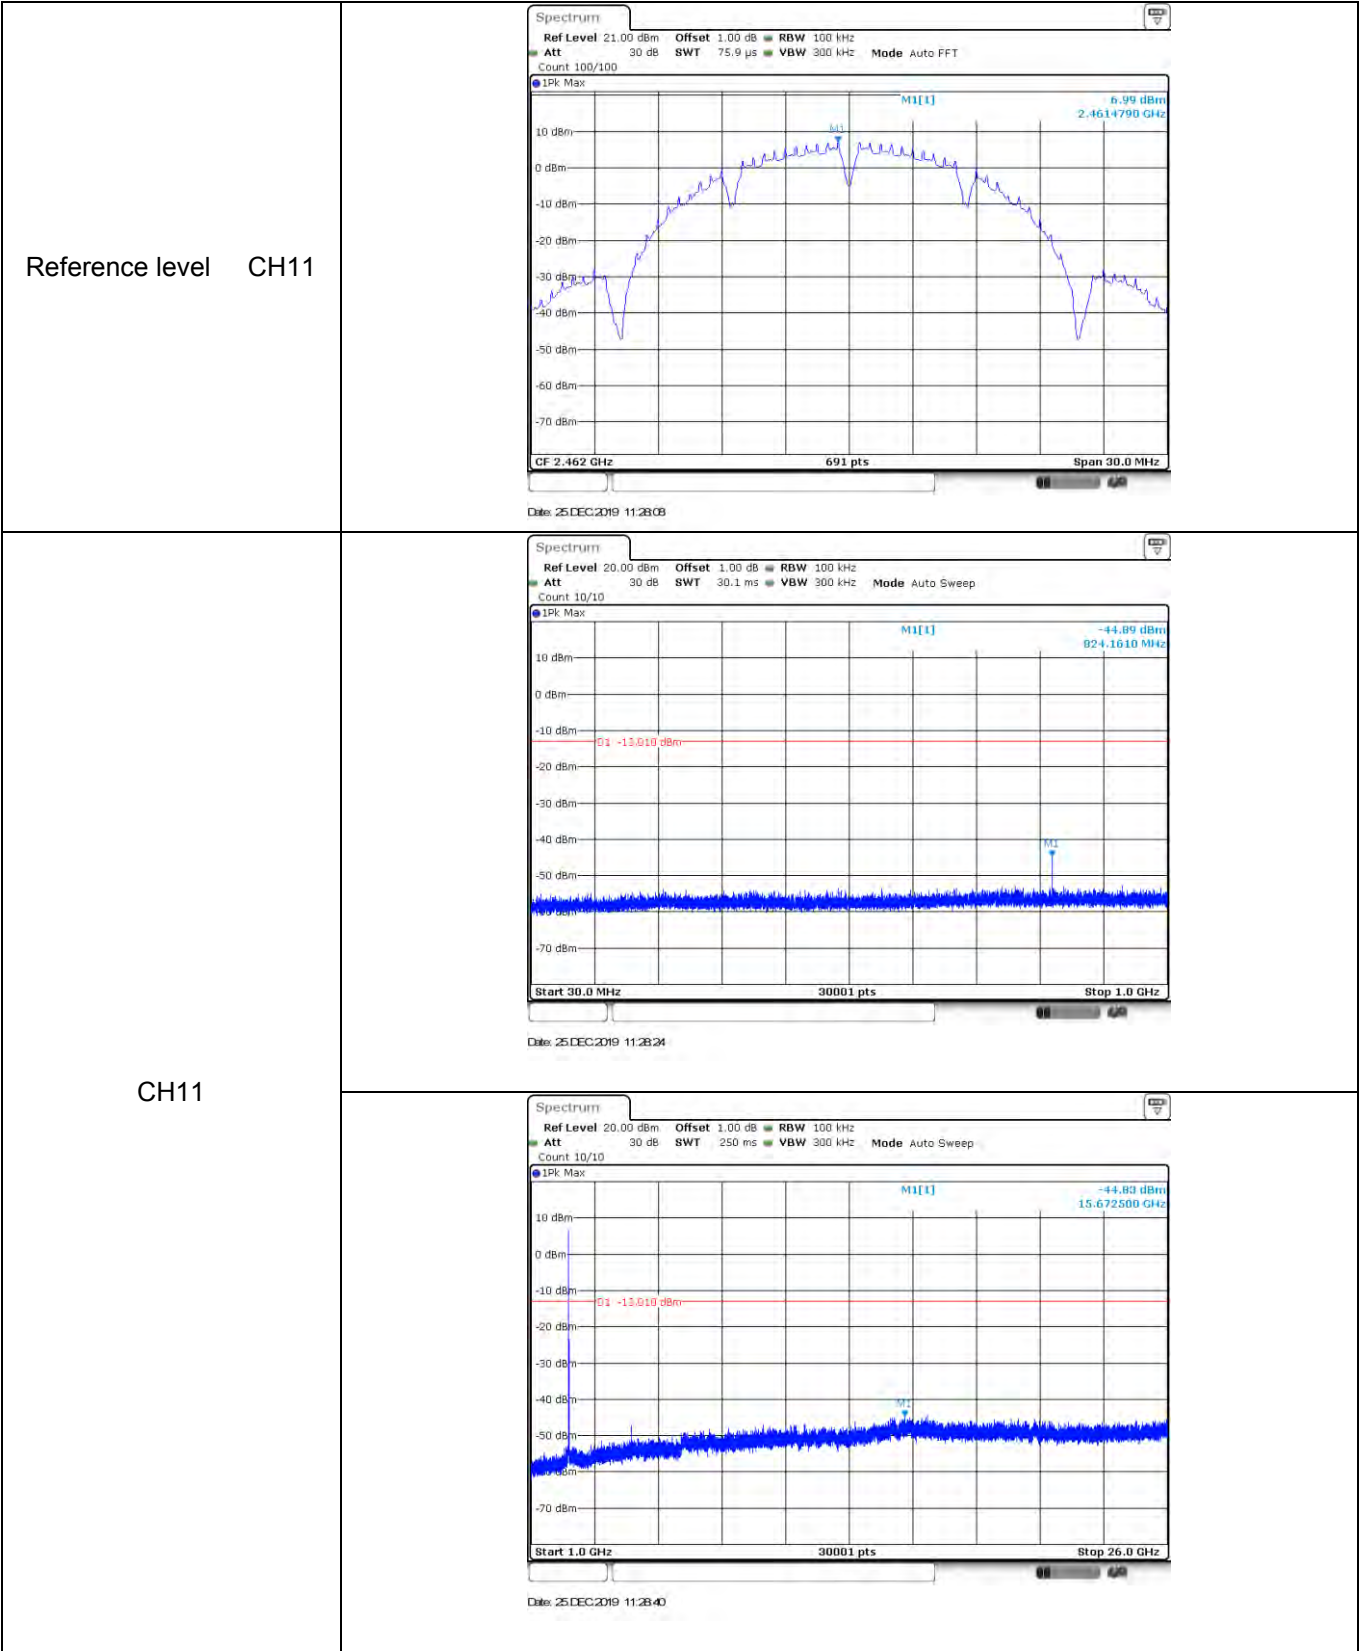


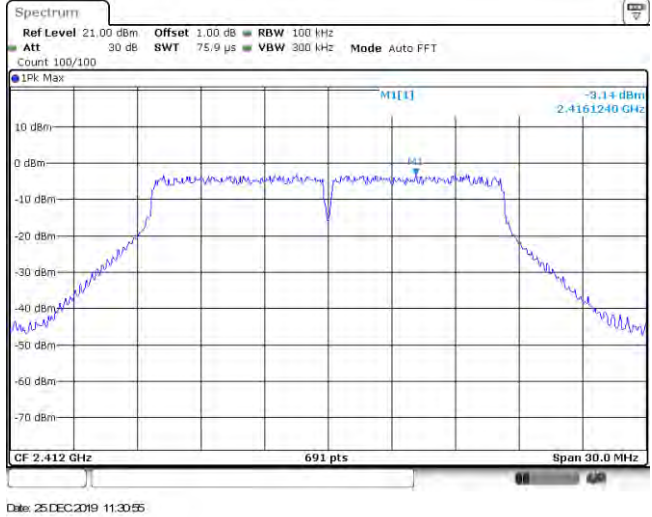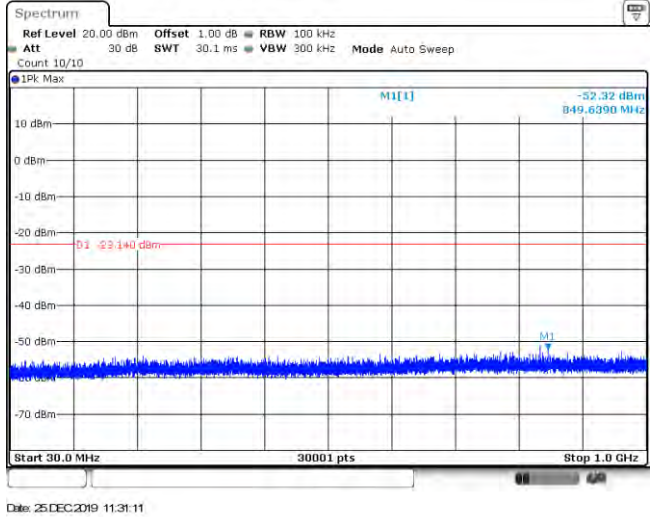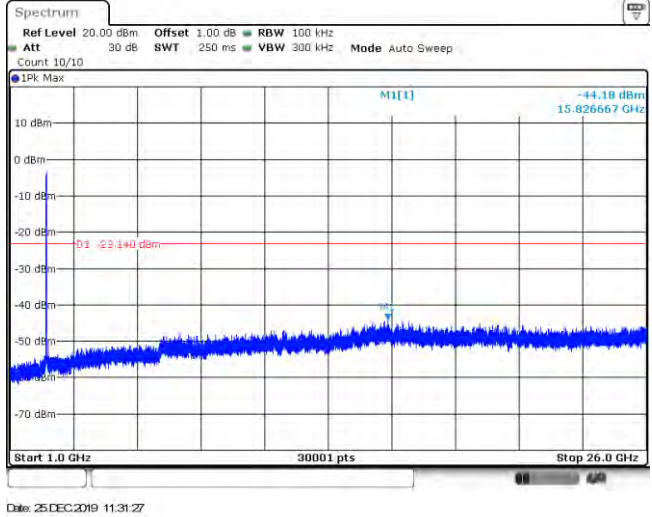Test Item:	SE	802.11 g	Antenna 1
Reference level CH01			
CH01			
			


Reference level CH06

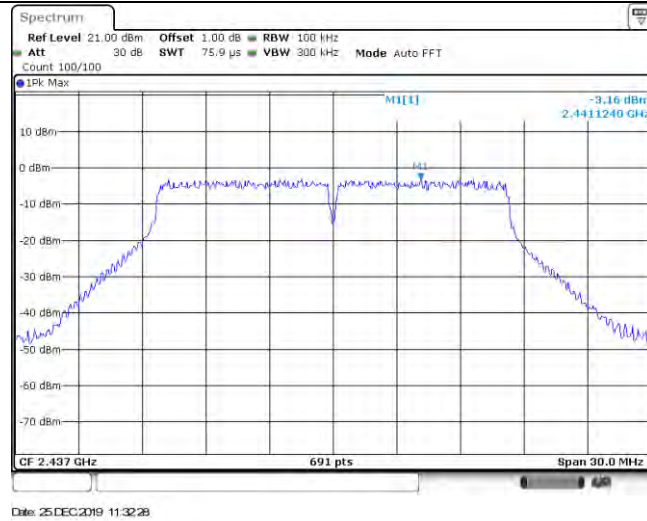



CH06

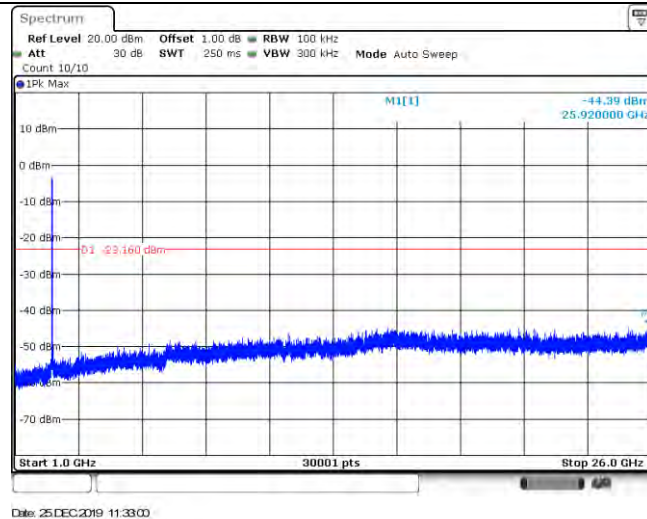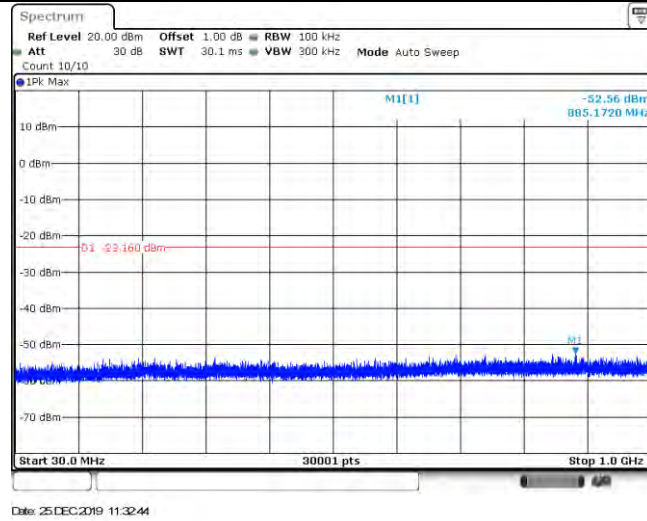


Reference level CH11

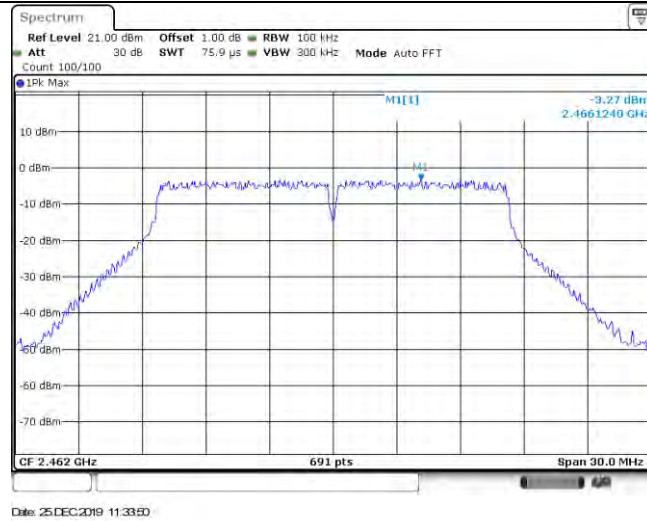



CH11

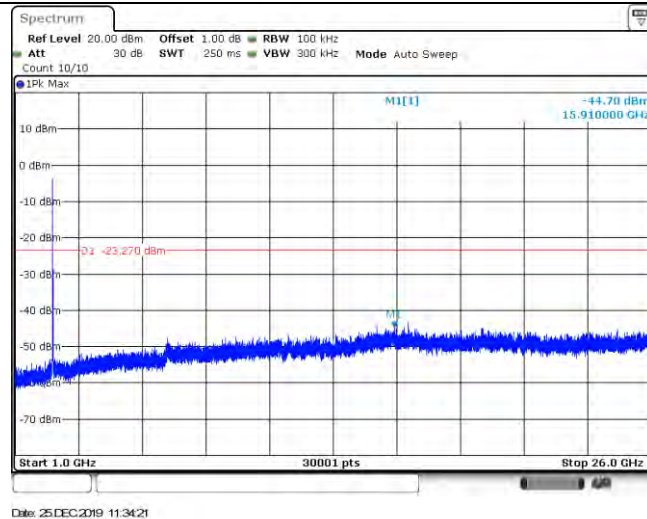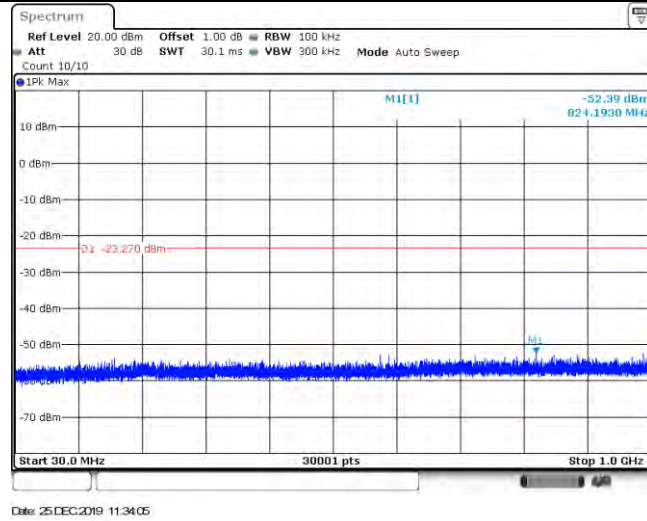


Reference level CH06

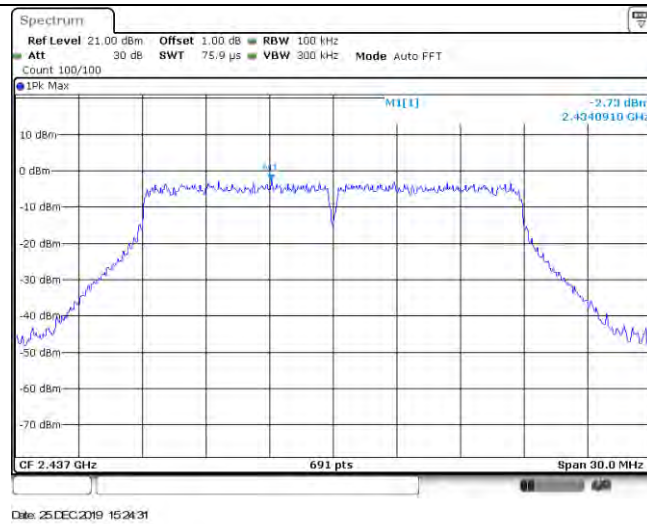



CH06

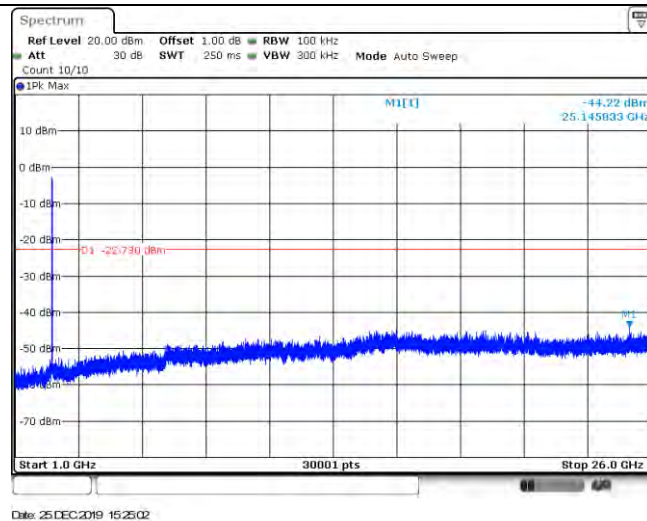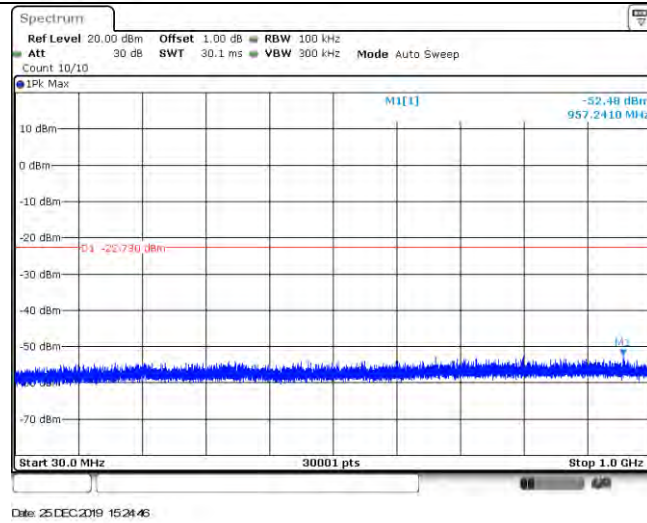

Reference level CH11

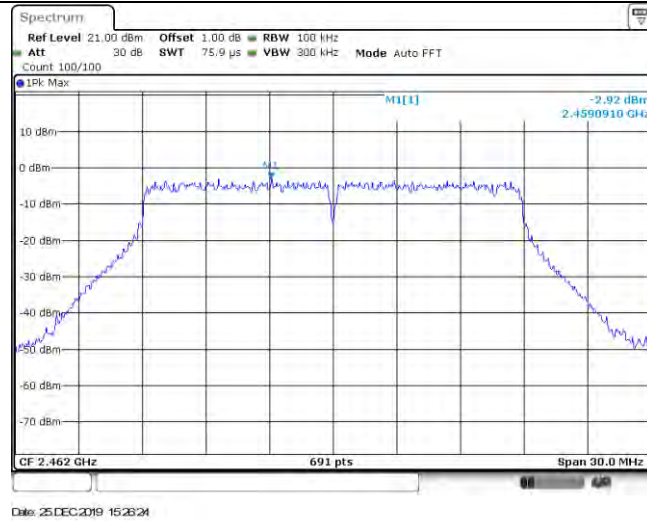


CH11

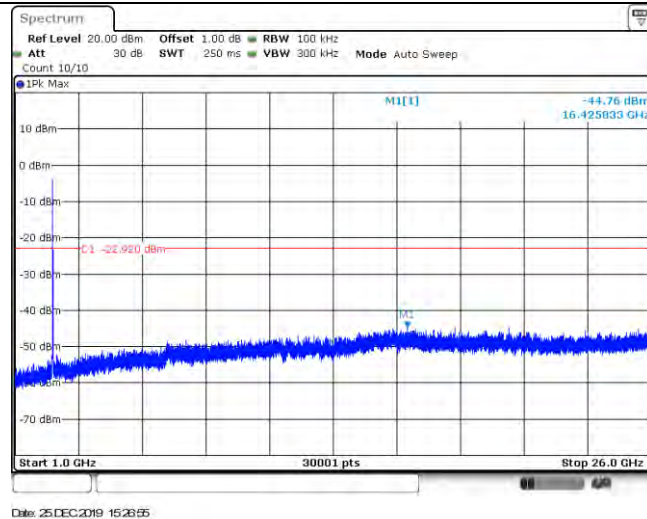
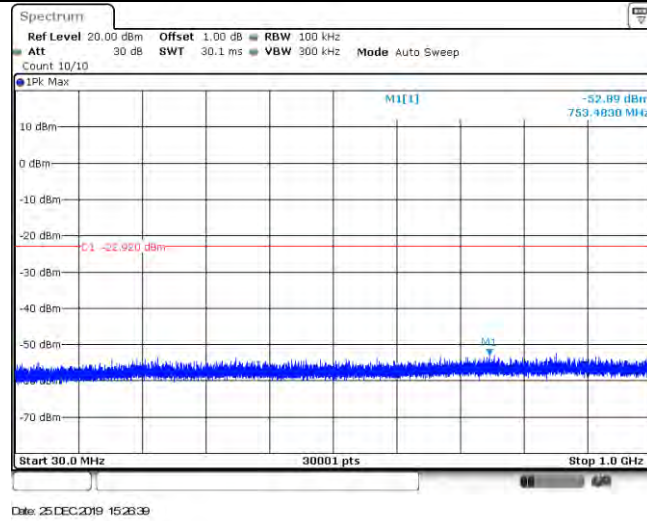


Test Item:	SE	802.11 n(HT40)	Antenna 1
Reference levelCH03	Spectrum Ref Level 21.00 dBmOffset 1.00 dB RBW 100 kHzAtt 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFTCount 100/100 IPK Max -5.86 dBm 2.4240840 GHz M1[1] 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.422 GHz 691 pts Span 60.0 MHz Date: 25 DEC 2019 16:31:20		
CH03	Spectrum Ref Level 20.00 dBmOffset 1.00 dB RBW 100 kHzAtt 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto SweepCount 10/10 IPK Max -52.43 dBm 747.7920 MHz M1[1] 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 25 DEC 2019 16:31:36		
	Spectrum Ref Level 20.00 dBmOffset 1.00 dB RBW 100 kHzAtt 30 dB SWT 250 ms VBW 300 kHz Mode Auto SweepCount 10/10 IPK Max -44.84 dBm 21.106667 GHz M1[1] 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 25 DEC 2019 16:31:52		


Reference level CH06

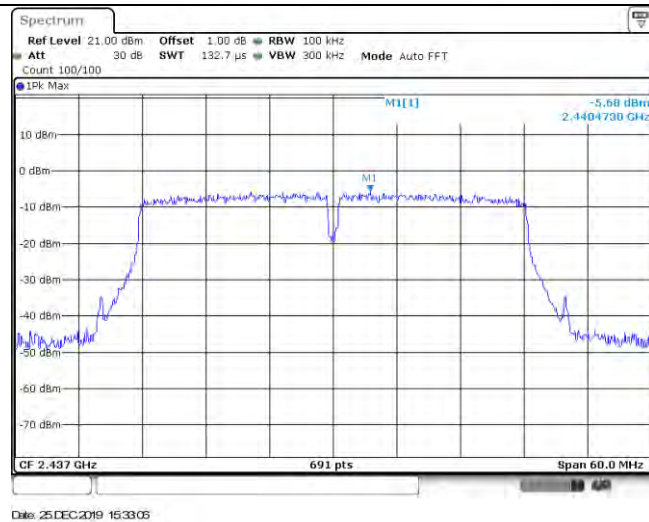



CH06

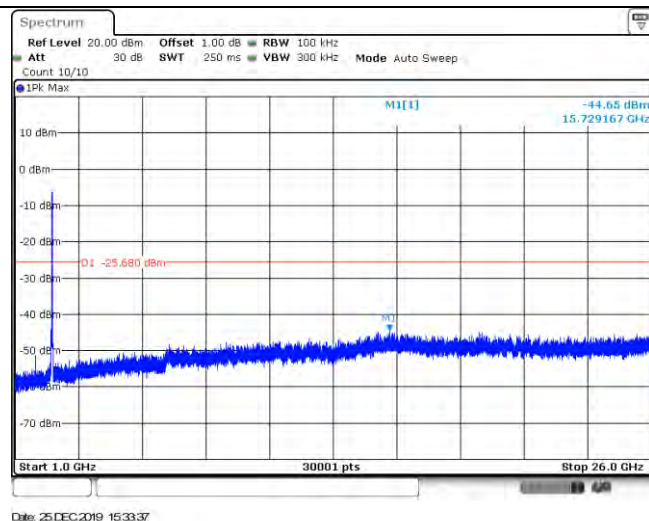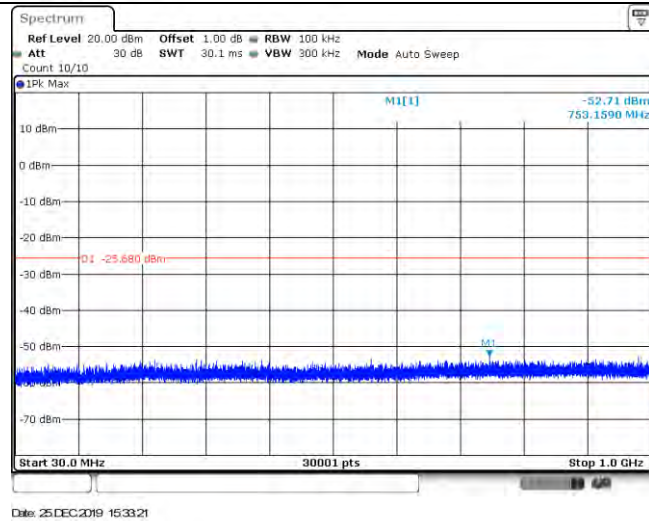

Reference level CH09

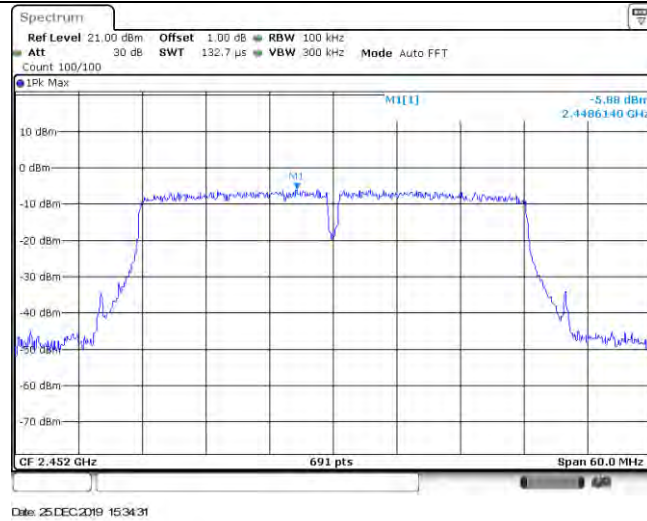

CH09

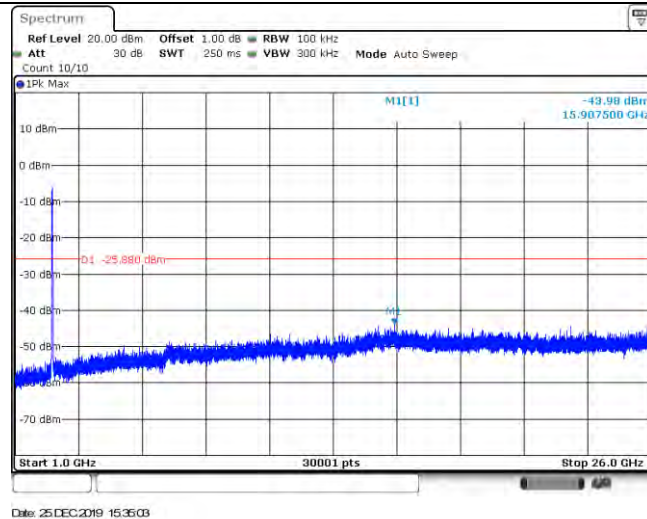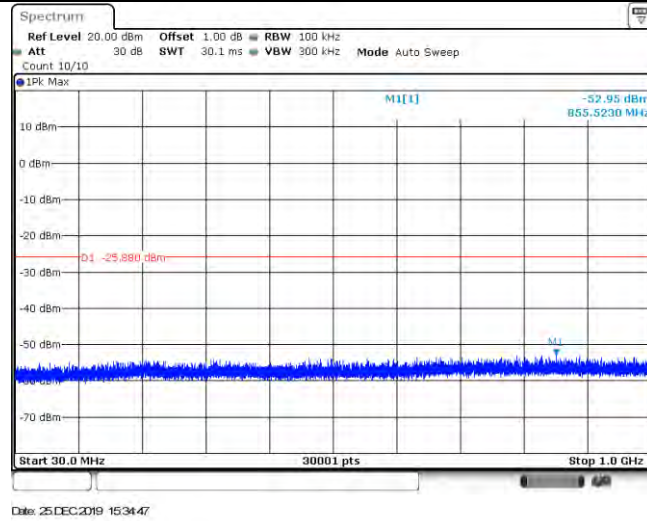

.....End of Report.....