



EMI TEST REPORT

Test Report No. : 26IE0025-YK

Applicant : MEIJI ELECTRIC INDUSTRIES CO., LTD.

Type of Equipment : Connector Check Gauge

Model No. : NWF-610

FCC ID : T6H-NWF610

**Test Standard : FCC Part15 Subpart C
Section 15.209, Section 15.231: 2006**

Test Result : Complied

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: April 20 and 28, 2006

Tested by: 
Toyokazu Imamura

Approved by: 
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

Table of Contents	Page
1 Applicant Information	3
2 Product Description	4
3 Test Specification, Procedures and Results	5
4 System Test Configuration	7
5 Automatically deactivate	8
6 Radiated Emissions	9
7 20dB Bandwidth	10
 <u>Contents of Appendixes</u>	 11
APPENDIX 1: Photographs of test setup	12
APPENDIX 2: Test Data	14
APPENDIX 3: Test instruments	20

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

1 Applicant Information

Company Name : MEIJI ELECTRIC INDUSTRIES CO., LTD.
Address : 13-8 Kamejima 2-chome, Nakamura-ku, Nagoya-shi, Aichi-ken,
453-8580 JAPAN
Telephone Number : +81-52-451-7661
Facsimile Number : +81-52-451-7659
Contact Person : Kaoru Okada

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b (24.05.06)

2 Product Description

Type of Equipment : Connector Check Gauge
Model No. : NWF-610
Serial No. : Sample 1
Rating : DC 3.0V
Country of Manufacture : Japan
Receipt Date of Sample : April 19, 2006
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

Model: NWF-610 (referred to as the EUT in this report) is a Connector Check Gauge which is composed of a fitting frame equipped with touch sensor and a radio transmitter.

Equipment type : Transmitter
Operation temperature range : 0 ~ 50 deg. C.
Other clock frequency : 71.0166MHz, 213.05MHz
Emission designation : 40K5F1D

Frequency of operation : 426.1MHz (Single)
Modulation : FSK
Antenna type : Built-in

FCC Part15.31 (e)

The EUT provides stable voltage, DC2.2V constantly to RF module regardless of input voltage, and the test was performed with the new battery. Therefore, the EUT complies with the power supply regulation.

FCC Part15.203 Antenna requirement

It is impossible for users to replace the antenna because the antenna is mounted inside the EUT. Therefore, the EUT complies with the antenna requirement.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

3 Test Specification, Procedures and Results

3.1 Test specification

Test specification : FCC Part15 Subpart C: 2006
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.209 Radiated emission limits, general requirements
 Section 15.231 Periodic operation in the band 40.66 - 40.70 MHz and above 70 MHz

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Section 15.207(a)	AC Mains	N/A *1	-	N/A
Automatically Deactivate	ANSI C63.4: 2003	Section 15.231(a)(1)	Radiated	N/A	-	Complied
Electric Field Strength of Fundamental Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.231(b)	Radiated	N/A	7.1dB (QP, Horizontal)	Complied
Electric Field Strength of Spurious Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.209	Radiated	N/A	4.8dB (852.20MHz, QP, Horizontal)	Complied
-20dB Bandwidth	ANSI C63.4: 2003 Annex H.6 Occupied bandwidth measurements	Section 15.231(c)	Radiated	N/A	-	Complied

*1) The test is not applicable since the EUT has no AC mains.

Note: UL Apex's EMI Work Procedures No.QPM05.

3.3 Addition to standard

No addition, deviation or exclusion has been made from the standard.

3.4 Uncertainty

Radiated emission

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.

The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is ± 5.2 dB.

The data listed in this test report has enough margin, more than site margin.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

3.5 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.
907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN
Telephone number : +81 465 77 1011
Facsimile number : +81 465 77 2112
NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005 (Registration No.: 95486).

IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005 (Registration No.: 466226).

IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).

IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 EMS lab. (Semi-anechoic chamber)	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)


4 System Test Configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode: Transmitting

4.2 Configuration of Tested System

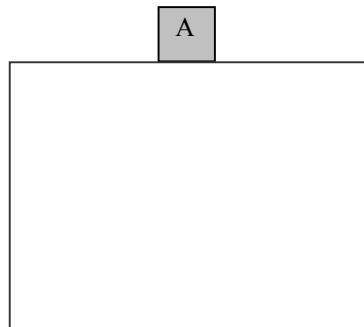

* Test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	Connector Check Gauge	NWF-610	Sample 1	MEIJI ELECTRIC INDUSTRIES	T6H-NWF610 (EUT)

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

5 Automatically deactivate

5.1 Operating environment

The test was carried out in No.1 anechoic chamber.

5.2 Results

Limit: A manually transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Summary of the test results : Pass
Test data : APPENDIX 2 Page 14

Date : April 20, 2006 Test engineer : Toyokazu Imamura

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

6 Radiated Emissions

6.1 Operating environment

The test was carried out in No.1 anechoic chamber.

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

6.3 Test conditions

Frequency range : 30 - 5000MHz
Test distance : 3m
EUT operation mode : Transmitting

6.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Detector	QP	PK/AV
IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz AV: RBW: 1MHz/VBW: 10Hz

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The equipment was previously checked at each position of three axes X, Y and Z. The position in which the maximum noise occurred was chosen to put into measurement. See the table below and photographs in page 13. With the position, the noise levels of all the frequencies were measured.

	EUT
Horizontal	X
Vertical	Z

6.5 Results

Summary of the test results : Pass

Test data : APPENDIX 2 Page 15 (Fundamental)
: APPENDIX 2 Page 16 to 18 (Spurious)

Date : April 20 and 28, 2006 Test engineer : Toyokazu Imamura

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

7 20dB Bandwidth

7.1 Operating environment

The test was carried out in No.1 anechoic chamber.

7.2 Test procedure

The bandwidth was measured with a spectrum analyzer and an antenna which is placed by the EUT.

7.3 Results

-20dB Bandwidth : **40.48kHz**
Occupied Bandwidth (99%) : **86.17kHz**

Summary of the test results : Pass
Test data : APPENDIX 2 Page 19

Date : April 20, 2006 Test engineer : Toyokazu Imamura

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b (24.05.06)

APPENDIX 1: Photographs of test setup

Page 12 : Radiated emission
Page 13 : Pre-check of the worst position

APPENDIX 2: Test Data

Page 14 : Automatically deactivate
Page 15 - 18 : Radiated emission
15 : Fundamental
16 - 18 : Spurious
Page 19 : 20dB bandwidth and Occupied bandwidth

APPENDIX 3: Test instruments

Page 20 : Test instruments

UL Apex Co., Ltd.

YAMAKITA EMC LAB.


907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

Radiated emission

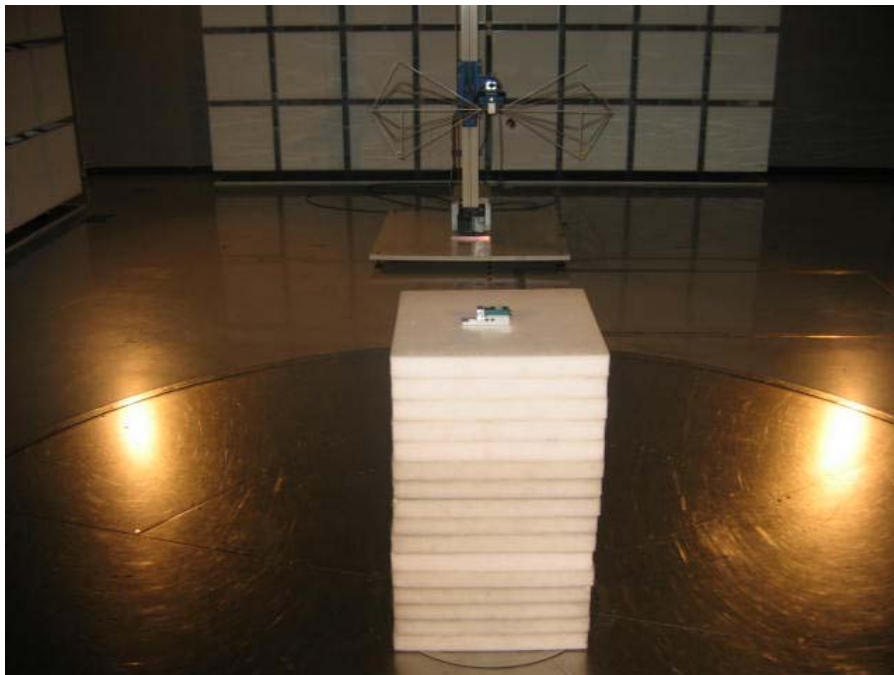

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN


Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)

Pre-check of worst position

EUT: X-axis

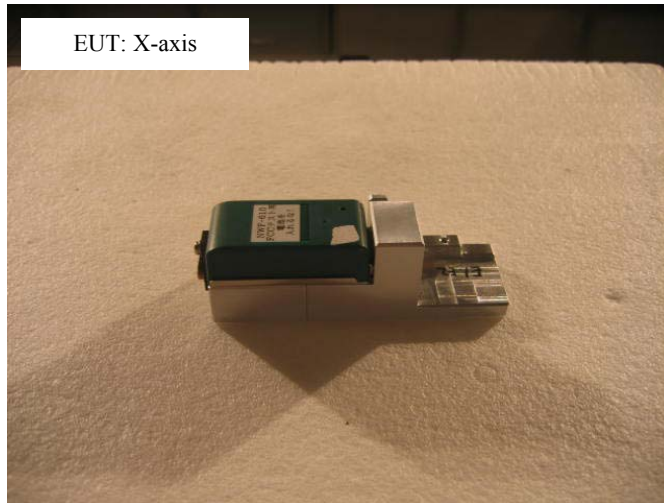

EUT: Y-axis



EUT: Z-axis



UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112


MF060b (24.05.06)

Automatically deactivate: FCC 15.231(a)(1)

COMPANY : MEIJI ELECTRIC INDUSTRIES CO., LTD.
EQUIPMENT : CONNECTOR CHECK GAUGE
MODEL NUMBER: NWF-610
SERIAL NUMBER: Sample1
FCC ID : T6H-NWF610
POWER : DC3V

UL Apex Co., Ltd. Yamakita No.1 Anechoic Chamber
REPORT NO : 261E0025-YK
REGULATION : Fcc Part15SubpartC 231(a)(1)
DATE : 2006/04/20
TEMP/HUMI : 22°C/55%
TEST MODE : Transmitting
ENGINEER : Toyokazu Imamura

Time of Transmitting	Limit
[sec]	[sec]
0.15	5.00

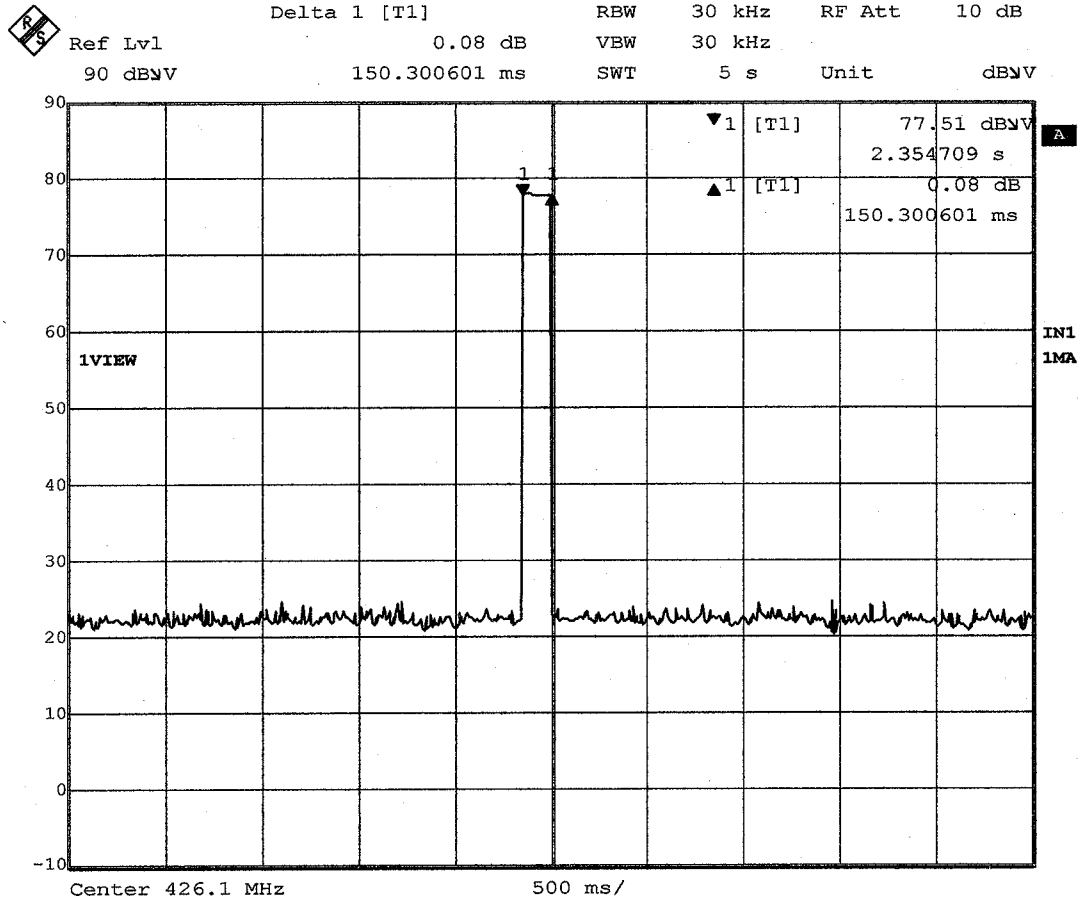

Date: 20.APR.2006 14:15:19

Electric Field Strength of Fundamental

UL Apex Co.,Ltd.

YAMAKITA NO.1 ANECHOIC CHAMBER

Report No. : 26IE0025-YK

Company : MEIJI ELECTRIC INDUSTRIES CO., LTD.

Equipment : CONNECTOR CHECK GAUGE

Model : NWF-610

Sample No. : Sample1

Power : DC3V

Mode : Transmitting

FCC ID : T6H-NWF610

Remark : Type E1-2

Regulation : FCC Part15C Section 15.231(b)

Test Distance : 3m

Date : 2006/4/20

Temperature : 22deg.C

Humidity : 55%

ENGINEER : Toyokazu Imamura

Fundamental : QP DETECT(Test Receiver : IF BW 120kHz)

No.	FREQ [MHz]	READING [dBuV]		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	RESULT [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
		HOR	VER					HOR	VER		HOR	VER
1	426.10	71.8	71.2	18.2	27.5	5.0	6.0	73.5	72.9	80.6	7.1	7.7

Sample Calculation :

RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + ATT

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26IE0025-YK

Applicant : MEIJI ELECTRIC INDUSTRIES CO.,LTD.
Kind of Equipment : CONNECTOR CHECK GAUGE
Model No. : NWF-610
Serial No. : Sample1
Power : DC3V
Mode : Transmitting
Remarks : Type E1-2
Date : 4/20/2006
Test Distance : 3 m
Temperature : 22 °C
Humidity : 55 %
Regulation : FCC Part15C § 15.209

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	71.01	BB	25.8	26.6	7.4	27.5	1.7	6.0	13.4	14.2	40.0	26.6	25.8
2.	213.04	BB	28.0	23.5	17.2	27.0	3.0	6.0	27.2	22.7	43.5	16.3	20.8
3.	355.07	BB	25.2	21.2	16.6	27.0	4.4	6.0	25.2	21.2	46.0	20.8	24.8
4.	497.11	BB	25.7	27.3	18.5	27.9	5.1	6.0	27.4	29.0	46.0	18.6	17.0
5.	852.20	BB	34.2	33.9	22.1	27.6	6.4	6.1	41.2	40.9	46.0	4.8	5.1
6.	994.22	BB	30.7	32.3	24.1	27.5	7.1	6.1	40.5	42.1	54.0	13.5	11.9

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KBA-03 (BBA9106) 30-299MHz / KLA-03 (USLP9143) 300-1000MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 261E0025-YK

Applicant : MEIJI ELECTRIC INDUSTRIES CO.,LTD.
 Kind of Equipment : CONNECTOR CHECK GAUGE
 Model No. : NWF-610
 Serial No. : Sample1
 Power : DC3V
 Mode : Transmitting
 Remarks : Type E1-2 PK Detector RBW:1MHz, VBW:1MHz
 Date : 4/28/2006
 Test Distance : 3 m
 Temperature : 19 °C Engineer : Toyokazu Imamura
 Humidity : 53 %
 Regulation : FCC Part15C § 15.209(PK Detection) 1-26GHz:3m/26-40GHz:1m

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1065.29	BB	51.3	52.8	24.4	37.6	4.3	0.0	42.4	43.9	74.0	31.6	30.1
2.	1278.30	BB	52.1	51.4	24.6	37.3	4.7	0.0	44.1	43.4	74.0	29.9	30.6
3.	1491.36	BB	49.1	51.0	24.9	36.9	5.1	0.0	42.2	44.1	74.0	31.8	29.9
4.	1704.40	BB	50.4	52.6	26.4	36.8	5.5	0.0	45.5	47.7	74.0	28.5	26.3
5.	1917.46	BB	48.5	51.9	27.9	36.7	5.9	0.0	45.6	49.0	74.0	28.4	25.0
6.	2130.50	BB	46.9	47.1	28.6	36.7	6.2	0.0	45.0	45.2	74.0	29.0	28.8
7.	2343.63	BB	46.7	46.9	28.7	36.8	6.5	0.0	45.1	45.3	74.0	28.9	28.7
8.	2556.60	BB	46.7	46.2	29.0	36.9	6.8	0.0	45.6	45.1	74.0	28.4	28.9
9.	2982.70	BB	45.8	45.7	30.2	37.4	7.6	0.0	46.2	46.1	74.0	27.8	27.9
10.	3408.80	BB	45.4	45.5	30.1	37.1	8.2	0.0	46.6	46.7	74.0	27.4	27.3
11.	3834.90	BB	43.9	44.3	31.4	36.8	8.6	0.0	47.1	47.5	74.0	26.9	26.5
12.	4261.00	BB	44.1	43.7	32.1	36.7	9.1	0.0	48.6	48.2	74.0	25.4	25.8

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz

■ CABLE: KCC-D11/D12 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: KSA-04 (R3271A)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 261E0025-YK

Applicant : MEIJI ELECTRIC INDUSTRIES CO.,LTD.
Kind of Equipment : CONNECTOR CHECK GAUGE
Model No. : NWF-610
Serial No. : Sample1
Power : DC3V
Mode : Transmitting
Remarks : Type E1-2 AV Detector RBW:1MHz, VBW:10Hz
Date : 4/28/2006
Test Distance : 3 m
Temperature : 19 °C Engineer : Toyokazu Imamura
Humidity : 53 %
Regulation : FCC Part15C s 15.209(AV Detection)1-26GHz:3m/26-40GHz:1m

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1065.29	BB	42.7	44.5	24.4	37.6	4.3	0.0	33.8	35.6	54.0	20.2	18.4
2.	1278.30	BB	47.0	46.1	24.6	37.3	4.7	0.0	39.0	38.1	54.0	15.0	15.9
3.	1491.36	BB	41.2	46.2	24.9	36.9	5.1	0.0	34.3	39.3	54.0	19.7	14.7
4.	1704.40	BB	44.0	48.0	26.4	36.8	5.5	0.0	39.1	43.1	54.0	14.9	10.9
5.	1917.46	BB	39.1	47.3	27.9	36.7	5.9	0.0	36.2	44.4	54.0	17.8	9.6
6.	2130.50	BB	35.4	36.7	28.6	36.7	6.2	0.0	33.5	34.8	54.0	20.5	19.2
7.	2343.63	BB	35.2	35.5	28.7	36.8	6.5	0.0	33.6	33.9	54.0	20.4	20.1
8.	2556.60	BB	36.1	35.4	29.0	36.9	6.8	0.0	35.0	34.3	54.0	19.0	19.7
9.	2982.70	BB	34.6	34.6	30.2	37.4	7.6	0.0	35.0	35.0	54.0	19.0	19.0
10.	3408.80	BB	33.6	33.9	30.1	37.1	8.2	0.0	34.8	35.1	54.0	19.2	18.9
11.	3834.90	BB	33.3	33.2	31.4	36.8	8.6	0.0	36.5	36.4	54.0	17.5	17.6
12.	4261.00	BB	32.7	32.5	32.1	36.7	9.1	0.0	37.2	37.0	54.0	16.8	17.0

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz


■ CABLE: KCC-D11/D12 ■ PREAMP: KAF-02 (8449B) ■ SPECTRUMANALYZER: KSA-04 (R3271A)

20dB Bandwidth: FCC 15.215(c)


COMPANY : MEIJI ELECTRIC INDUSTRIES CO., LTD.
EQUIPMENT : CONNECTOR CHECK GAUGE
MODEL NUMBER: NWF-610
SERIAL NUMBER: Sample1
FCC ID : T6H-NWF610
POWER : DC3V
Remarks :

UL Apex Co., Ltd. Yamakita No.1 Anechoic Chamber
REPORT NO : 26IE0025-YK
REGULATION : FCC Part15SubpartC 215(c)
DATE : 2006/04/20
TEMP/HUMI : 22°C/55%
TEST MODE : Transmitting
ENGINEER : Toyokazu Imamura

20dB Bandwidth: 40.48kHz

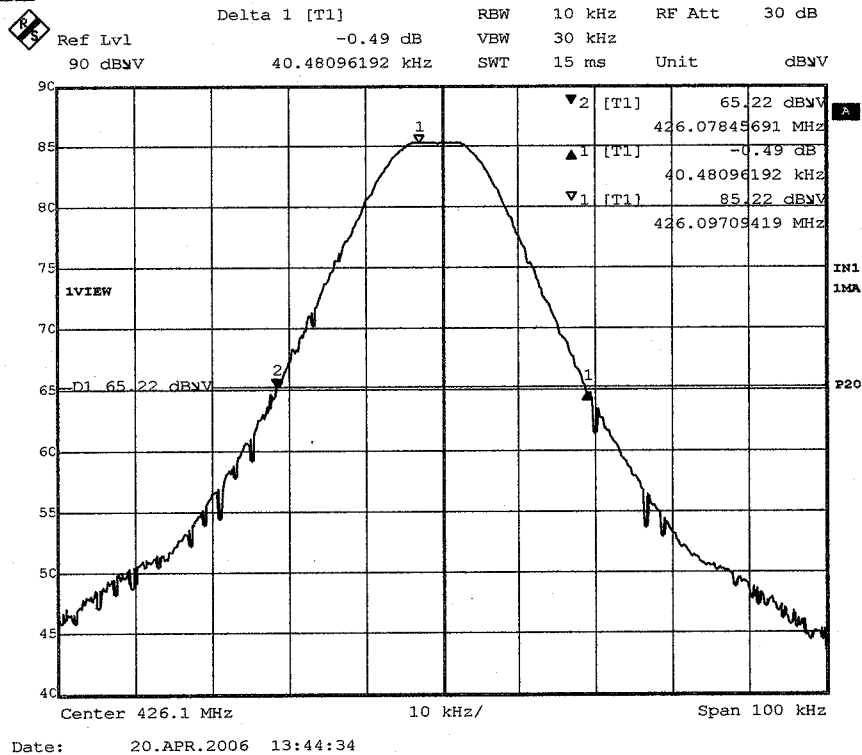

OBW(99%): 86.17kHz

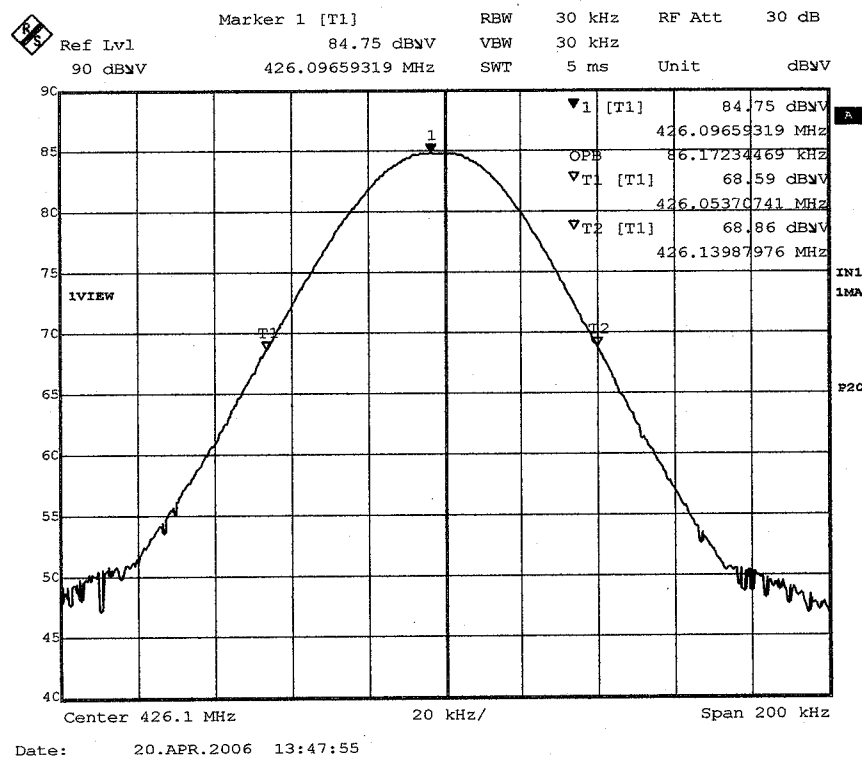

APPENDIX 3 Test Instruments

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
YA-RE	Radiated emission(software)	UL-Apex	RE(Ver.1.5)	RE	-
KAEC-01(NS A)	Anechoic Chamber	JSE	Semi 3m	RE/BW/A D	2005/09/03 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE/BW/A D	2005/05/11 * 12 2006/04/21 * 12
KAT6-01	Attenuator	INMET	18N-6dB	RE/BW/A D	2006/03/24 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2006/01/17 * 12
KCC-30/31/3 2/34/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/RF M-E421	RE/BW/A D	2005/12/22 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE/BW/A D	2006/01/17 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE	2005/09/13 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE/BW/A D	2005/08/05 * 12
KOS-02	Digital Humidity Indicator	Custom	CTH-190	RE/BW/A D	2004/07/22 * 24
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE	2005/04/28 * 12 2006/04/24 * 12
KCC-D11/D1 2	Coaxial cable	Suhner/storm	SCOFLEX103/ 90-388-020	RE	2005/09/09 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2005/08/20 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

RE: Radiated emission

BW: Bandwidth

AD: Automatically deactivate

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (24.05.06)