

FCC PART 15D  
MEASUREMENT AND TEST REPORT

For

**RTX Hong Kong Ltd.**

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

**FCC ID: T7HCT8171**

|                                                      |                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report               | <b>Product Type:</b><br>DECT-HiBAN Cordless Phone<br>(Handset Unit)                                                                                                                                                                                                                         |
| <b>Test Engineer:</b> <u>Gardon Zhang</u>            | <i>Gardon Zhang</i>                                                                                                                                                                                                                                                                         |
| <b>Report Number:</b> <u>RSZ140826003-00PPAA1</u>    |                                                                                                                                                                                                                                                                                             |
| <b>Report Date:</b> <u>2014-09-17</u>                |                                                                                                                                                                                                                                                                                             |
| <b>Reviewed By:</b> <u>Jimmy Xiao</u><br>RF Engineer | <i>Jimmy Xiao</i>                                                                                                                                                                                                                                                                           |
| <b>Prepared By:</b>                                  | Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building<br>ShiHua Road, FuTian Free Trade Zone<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

|                                                           |          |
|-----------------------------------------------------------|----------|
| <b>GENERAL INFORMATION.....</b>                           | <b>3</b> |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....  | 3        |
| OBJECTIVE .....                                           | 3        |
| RELATED SUBMITTAL(S)/GRANT(S).....                        | 3        |
| TEST METHODOLOGY .....                                    | 3        |
| TEST FACILITY .....                                       | 3        |
| <b>SYSTEM TEST CONFIGURATION .....</b>                    | <b>4</b> |
| DESCRIPTION OF TEST CONFIGURATION .....                   | 4        |
| EQUIPMENT MODIFICATIONS .....                             | 4        |
| LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....            | 4        |
| BLOCK DIAGRAM OF TEST SETUP .....                         | 4        |
| <b>SUMMARY OF TEST RESULTS .....</b>                      | <b>5</b> |
| <b>FCC §15. 319 (I) &amp; §2.1093 - RF EXPOSURE .....</b> | <b>6</b> |
| APPLICABLE STANDARD .....                                 | 6        |
| <b>FCC§15.317&amp;§15.203 - ANTENNA REQUIREMENT .....</b> | <b>7</b> |
| APPLICABLE STANDARD .....                                 | 7        |
| ANTENNA CONNECTOR CONSTRUCTION .....                      | 7        |
| <b>FCC§15.319 (G) - RADIATED EMISSIONS.....</b>           | <b>8</b> |
| APPLICABLE STANDARD .....                                 | 8        |
| MEASUREMENT UNCERTAINTY .....                             | 8        |
| EUT SETUP .....                                           | 8        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....         | 9        |
| TEST PROCEDURE .....                                      | 9        |
| TEST EQUIPMENT LIST AND DETAILS.....                      | 9        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....            | 10       |
| TEST RESULTS SUMMARY .....                                | 10       |
| TEST DATA .....                                           | 10       |

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *RTX Hong Kong Ltd.*'s product, model number: *Phonak DECT II Cordless phone US/CAN (FCC ID: T7HCT8171)* (the "EUT") in this report was a handset unit of *DECT-HiBAN Cordless Phone*, which was measured approximately: 13.5 cm (L) x 5.1 cm (W) x 2.1 cm (H), rated with input voltage: DC 3.7V battery.

*\* All measurement and test data in this report was gathered from production sample serial number: 1408195 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-08-26.*

### Objective

This test report was based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 - 2006 and ANSI C63.4-2009.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.203, 15.315, 15.317, 15.319 and 15.323 rules.

### Related Submittal(s)/Grant(s)

FCC part 15D base unit with FCC ID: T7HX8170 has been granted on 2013-07-12.  
FCC part 15C handset unit submission with FCC ID: T7HCT8171.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2006, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen).

The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in TBR6 mode which is provided by the manufacturer.


Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details

| Manufacturer | Description                        | Model | Serial Number |
|--------------|------------------------------------|-------|---------------|
| R&S          | Digital Radio-Communication Tester | CMD60 | 829902/026    |

Block Diagram of Test Setup

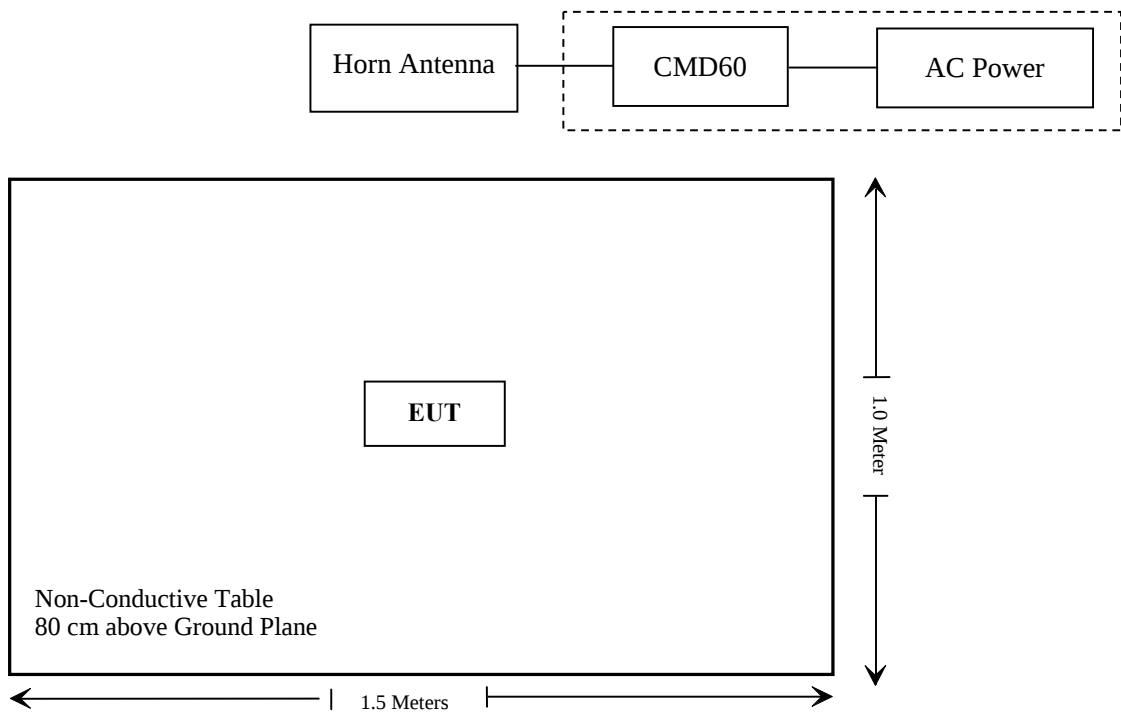

**SUMMARY OF TEST RESULTS**

| FCC Rules                       | Description of Test                      | Result         |
|---------------------------------|------------------------------------------|----------------|
| § 15.319 (i)&2.1093             | RF Exposure                              | Compliance     |
| § 15.317<br>§ 15.203            | Antenna Requirement                      | Compliance     |
| § 15.315<br>§ 15.207            | Conducted Emission                       | Not Applicable |
| § 15.323 (a)                    | Emission Bandwidth                       | Compliance*    |
| § 15.319 (c)                    | Peak Transmit Power                      | Compliance*    |
| § 15.319 (d)                    | Power Spectral Density                   | Compliance*    |
| § 15.323 (d)                    | Emission Inside and Outside the sub-band | Compliance*    |
| § 15.319 (g)                    | Radiated Emission                        | Compliance     |
| § 15.323 (f)                    | Frequency Stability Handset              | Compliance*    |
| § 15.323 (c)(e)<br>§ 15.319 (f) | Specific Requirements for UPCS           | Compliance*    |

**Note:**

The EUT is powered by battery only, so conducted emission test is not required.

Compliance\*: The device is identical to the previously certified device except for changing HiBAN IC from Phonak WIMOX.X to Phonak WH3, the FCC ID: T7HX8170 granted on 2013-07-12, report No.: RSZ130321006-00PP.

**FCC §15. 319 (i) & §2.1093 - RF EXPOSURE**

---

**Applicable Standard**

According to FCC Part15.319 (i), Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in§1.1307(b) and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

**Result:**

Please refer to SAR test report RSZ140826001-20.

**FCC§15.317&§15.203 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one integrated antenna arrangement for DECT, which was permanently attached and the gain was 1 dBi, fulfill the requirement of this section. Please refer to the internal photos.

**Result:** Compliant.

## FCC§15.319 (g) - RADIATED EMISSIONS

### Applicable Standard


According to FCC§15.319(g), notwithstanding other technical requirements specified in this subpart, attenuation of emissions below the general emission limits in §15.209 is not required.

### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

### EUT Setup

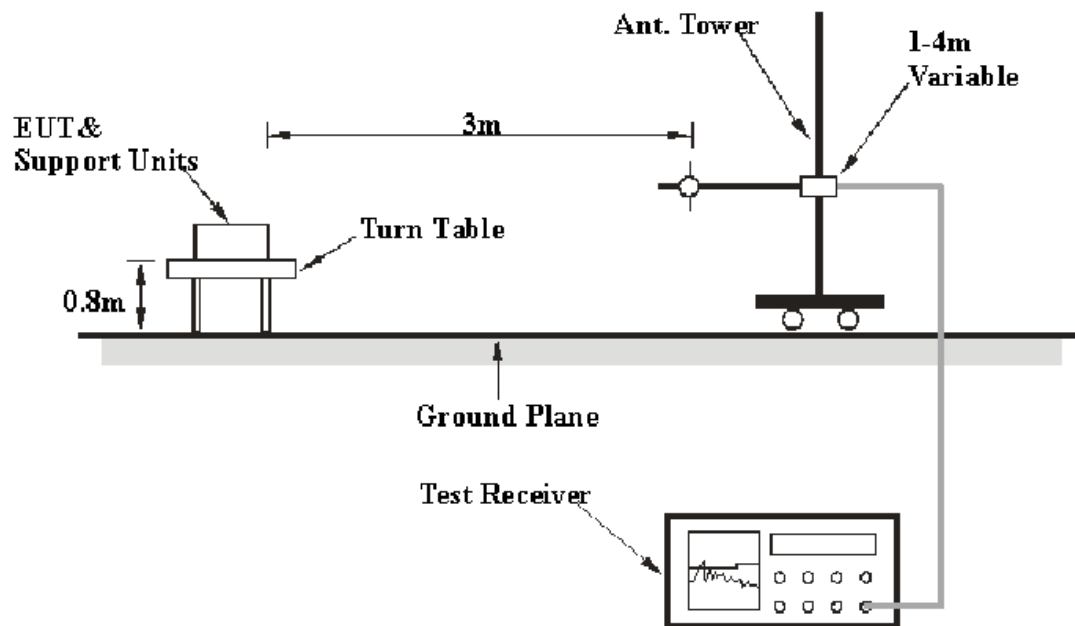

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.17 - 2006. The specification used was the FCC 15§ 15.319(g).

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range  | RBW     | Video B/W | IF B/W  | Detector |
|------------------|---------|-----------|---------|----------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz      | 1 MHz   | 3 MHz     | /       | PK       |
|                  | 1 MHz   | 10 Hz     | /       | Ave.     |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

| Manufacturer              | Description       | Model           | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|-------------------|-----------------|---------------|------------------|----------------------|
| HP                        | Amplifier         | 8447E           | 1937A01046    | 2014-05-06       | 2015-05-06           |
| Rohde & Schwarz           | EMI Test Receiver | ESCI            | 101120        | 2013-11-12       | 2014-11-12           |
| Sunol Sciences            | Broadband Antenna | JB1             | A040904-2     | 2011-11-28       | 2014-11-27           |
| SUPER ULTRA               | Amplifier         | ZVA-213+        | N/A           | 2013-11-24       | 2014-11-23           |
| Sunol Sciences            | Horn Antenna      | DRH-118         | A052304       | 2011-12-01       | 2014-11-30           |
| BIZI                      | Signal Analyzer   | FSIQ26          | 8386001028    | 2013-11-12       | 2014-11-12           |
| the electro-Mechanics Co. | Horn Antenna      | 3116            | 9510-2270     | 2011-10-14       | 2014-10-13           |
| DUCOMMUN                  | Pre-amplifier     | ALN-22093530-01 | 991373-01     | 2013-11-23       | 2014-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.319 (g), with the worst margin reading of:

**14.88 dB at 689.6 MHz in the Vertical polarization**

## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 51 %      |
| ATM Pressure:      | 101.0 kPa |

*\*The testing was performed by Gardon Zhang on 2014-09-12.*

*Test mode: Transmitting*

**30 MHz ~ 20 GHz:**

| Frequency<br>(MHz)            | Receiver          |                          | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.319(g)/209/205 |                |
|-------------------------------|-------------------|--------------------------|---------------------|---------------|----------------|-----------------------------|------------------------------------|-------------------------------|----------------|
|                               | Reading<br>(dBμV) | Detector<br>(PK/QP/Ave.) |                     | Height<br>(m) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)             | Margin<br>(dB) |
| Low Channel (1921.536 MHz)    |                   |                          |                     |               |                |                             |                                    |                               |                |
| 689.6                         | 36.32             | QP                       | 245                 | 1.0           | V              | -5.2                        | 31.12                              | 46                            | 14.88          |
| 1921.536                      | 106.71            | PK                       | 123                 | 1.3           | H              | 2.63                        | 109.34                             | /                             | /              |
| 1921.536                      | 113.48            | PK                       | 105                 | 2.3           | V              | 2.63                        | 116.11                             | /                             | /              |
| 3843.07                       | 36.02             | PK                       | 330                 | 1.9           | H              | 9.7                         | 45.72                              | 74                            | 28.28          |
| 3843.07                       | 36.52             | PK                       | 283                 | 1.2           | V              | 9.7                         | 46.22                              | 74                            | 27.78          |
| 5764.61                       | 40.02             | PK                       | 171                 | 1.6           | H              | 13.51                       | 53.53                              | 74                            | 20.47          |
| 5764.61                       | 36.58             | PK                       | 274                 | 1.9           | V              | 13.51                       | 50.09                              | 74                            | 23.91          |
| 7686.14                       | 39.75             | PK                       | 40                  | 1.3           | H              | 16.01                       | 55.76                              | 74                            | 18.24          |
| 7686.14                       | 37.31             | PK                       | 156                 | 1.2           | V              | 16.01                       | 53.32                              | 74                            | 20.68          |
| Middle Channel (1924.992 MHz) |                   |                          |                     |               |                |                             |                                    |                               |                |
| 689.6                         | 36.03             | QP                       | 240                 | 1.0           | V              | -5.2                        | 30.83                              | 46                            | 15.17          |
| 1924.992                      | 109.21            | PK                       | 159                 | 2.3           | H              | 2.63                        | 111.84                             | /                             | /              |
| 1924.992                      | 110.88            | PK                       | 78                  | 2.1           | V              | 2.63                        | 113.51                             | /                             | /              |
| 3849.98                       | 37.21             | PK                       | 119                 | 1.4           | H              | 9.7                         | 46.91                              | 74                            | 27.09          |
| 3849.98                       | 37.58             | PK                       | 111                 | 1.1           | V              | 9.7                         | 47.28                              | 74                            | 26.72          |
| 5774.98                       | 42.63             | PK                       | 234                 | 2.2           | H              | 13.51                       | 56.14                              | 74                            | 17.86          |
| 5774.98                       | 35.51             | PK                       | 259                 | 1.0           | V              | 13.51                       | 49.02                              | 74                            | 24.98          |
| 7699.97                       | 38.31             | PK                       | 131                 | 2.2           | H              | 16.47                       | 54.78                              | 74                            | 19.22          |
| 7699.97                       | 35.55             | PK                       | 344                 | 1.7           | V              | 16.47                       | 52.02                              | 74                            | 21.98          |
| High Channel (1928.448 MHz)   |                   |                          |                     |               |                |                             |                                    |                               |                |
| 689.6                         | 36.21             | QP                       | 248                 | 1.0           | V              | -5.2                        | 31.01                              | 46                            | 14.99          |
| 1928.448                      | 108.21            | PK                       | 56                  | 2.1           | H              | 2.63                        | 110.84                             | /                             | /              |
| 1928.448                      | 111.52            | PK                       | 241                 | 2.5           | V              | 2.63                        | 114.15                             | /                             | /              |
| 3856.80                       | 36.58             | PK                       | 111                 | 1.6           | H              | 9.7                         | 46.28                              | 74                            | 27.72          |
| 3856.80                       | 38.56             | PK                       | 246                 | 1.0           | V              | 9.7                         | 48.26                              | 74                            | 25.74          |
| 5785.20                       | 40.17             | PK                       | 60                  | 1.5           | H              | 13.87                       | 54.04                              | 74                            | 19.96          |
| 5785.20                       | 37.52             | PK                       | 360                 | 1.1           | V              | 13.87                       | 51.39                              | 74                            | 22.61          |
| 7713.60                       | 38.58             | PK                       | 290                 | 1.0           | H              | 16.47                       | 55.05                              | 74                            | 18.95          |
| 7713.60                       | 36.78             | PK                       | 241                 | 1.9           | V              | 16.47                       | 53.25                              | 74                            | 20.75          |

| Field Strength of Radiated Emission<br>Average |                                                 |                |                              |                                     |                             |        |             |
|------------------------------------------------|-------------------------------------------------|----------------|------------------------------|-------------------------------------|-----------------------------|--------|-------------|
| Freq.<br>(MHz)                                 | Peak Corrected<br>Amplitude.<br>@3m<br>(dBμV/m) | Polar<br>(H/V) | Duty Cycle<br>Factor<br>(dB) | Corrected<br>Amplitude.<br>(dBμV/m) | FCC<br>15.319/15.205/15.209 |        | Comment     |
|                                                |                                                 |                |                              |                                     | Limit<br>(dBμV/m)           | Margin |             |
| Low Channel (1921.536 MHz)                     |                                                 |                |                              |                                     |                             |        |             |
| 1921.536                                       | 109.34                                          | H              | -26.33                       | 83.01                               | /                           | /      | Fundamental |
| 1921.536                                       | 116.11                                          | V              | -26.33                       | 89.78                               | /                           | /      | Fundamental |
| 3843.07                                        | 45.72                                           | H              | -26.33                       | 19.39                               | 54                          | 34.61  | Harmonic    |
| 3843.07                                        | 46.22                                           | V              | -26.33                       | 19.89                               | 54                          | 34.11  | Harmonic    |
| 5764.61                                        | 53.53                                           | H              | -26.33                       | 27.20                               | 54                          | 26.80  | Harmonic    |
| 5764.61                                        | 50.09                                           | V              | -26.33                       | 23.76                               | 54                          | 30.24  | Harmonic    |
| 7686.14                                        | 55.76                                           | H              | -26.33                       | 29.43                               | 54                          | 24.57  | Harmonic    |
| 7686.14                                        | 53.32                                           | V              | -26.33                       | 26.99                               | 54                          | 27.01  | Harmonic    |
| Middle Channel (1924.992 MHz)                  |                                                 |                |                              |                                     |                             |        |             |
| 1924.992                                       | 111.84                                          | H              | -26.33                       | 85.51                               | /                           | /      | Fundamental |
| 1924.992                                       | 113.51                                          | V              | -26.33                       | 87.18                               | /                           | /      | Fundamental |
| 3849.98                                        | 46.91                                           | H              | -26.33                       | 20.58                               | 54                          | 33.42  | Harmonic    |
| 3849.98                                        | 47.28                                           | V              | -26.33                       | 20.95                               | 54                          | 33.05  | Harmonic    |
| 5774.98                                        | 56.14                                           | H              | -26.33                       | 29.81                               | 54                          | 24.19  | Harmonic    |
| 5774.98                                        | 49.02                                           | V              | -26.33                       | 22.69                               | 54                          | 31.31  | Harmonic    |
| 7699.97                                        | 54.78                                           | H              | -26.33                       | 28.45                               | 54                          | 25.55  | Harmonic    |
| 7699.97                                        | 52.02                                           | V              | -26.33                       | 25.69                               | 54                          | 28.31  | Harmonic    |
| High Channel (1928.448 MHz)                    |                                                 |                |                              |                                     |                             |        |             |
| 1928.448                                       | 110.84                                          | H              | -26.33                       | 84.51                               | /                           | /      | Fundamental |
| 1928.448                                       | 114.15                                          | V              | -26.33                       | 87.82                               | /                           | /      | Fundamental |
| 3856.80                                        | 46.28                                           | H              | -26.33                       | 19.95                               | 54                          | 34.05  | Harmonic    |
| 3856.80                                        | 48.26                                           | V              | -26.33                       | 21.93                               | 54                          | 32.07  | Harmonic    |
| 5785.20                                        | 54.04                                           | H              | -26.33                       | 27.71                               | 54                          | 26.29  | Harmonic    |
| 5785.20                                        | 51.39                                           | V              | -26.33                       | 25.06                               | 54                          | 28.94  | Harmonic    |
| 7713.60                                        | 55.05                                           | H              | -26.33                       | 28.72                               | 54                          | 25.28  | Harmonic    |
| 7713.60                                        | 53.25                                           | V              | -26.33                       | 26.92                               | 54                          | 27.08  | Harmonic    |

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna Factor (Rx) + Cable Loss – Amplifier Factor

Margin = Limit - Corrected Amplitude

Duty Cycle = Ton/Tp\*100%, Ton = 0.484 ms, Tp = 10.032 ms

Duty Cycle = Duty Cycle Factor = 20lg (Duty Cycle) = -26.33

AV = PK + 20\*lg(Duty Cycle) = PK – 26.33

The duty cycle data please refer to FCC ID: T7HX8170 granted on 2013-07-12, report No.: RSZ130321006-00PP.

\*\*\*\*\* END OF REPORT \*\*\*\*\*