

TEST REPORT

Applicant Name: RTX Hong Kong Ltd.
Address: 8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong
Report Number: 2601R48888E-RF
FCC ID: T7HCTH200
IC: 4979B-CTH200

Test Standard (s)

FCC PART 15D;

RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-213, ISSUE 3, MARCH 2015

Sample Description

Product Type: Handset
Model No.: H200
Multiple Model(s) No.: N/A
Trade Mark: RTX
Date Received: 2026/03/19
Issue Date: 2026/06/25

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1307 & §2.1093 - RF EXPOSURE.....	13
APPLICABLE STANDARD	13
TEST RESULT	13
RSS-102 - RF EXPOSURE	14
APPLICABLE STANDARD	14
FCC § 15.317, § 15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC § 15.315, § 15.207 & RSS-213 §5.4 AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17
FCC § 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA	21
FCC § 15.319 (C) & RSS-213 §5.6 PEAK TRANSMIT POWER	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	27
FCC § 15.319 (D) & RSS-213 §5.7 POWER SPECTRAL DENSITY	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	32

FCC § 15.323 (D) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND	36
APPLICABLE STANDARD	36
TEST PROCEDURE	37
FACTOR & OVER LIMIT/MARGIN CALCULATION	38
EUT SETUP	39
TEST DATA	40
FCC § 15.323 (F) & RSS-213 §5.3 FREQUENCY STABILITY	76
APPLICABLE STANDARD	76
TEST PROCEDURE	76
TEST DATA	77
FCC § 15.323 (C)(E)§ 15.319 (F) & RSS-213 §5.1&§5.2 SPECIFIC REQUIREMENTS FOR UPCS DEVICE	78
APPLICABLE STANDARD	78
TEST PROCEDURE	78
TEST DATA	78
1) AUTOMATIC DISCONTINUATION OF TRANSMISSION.....	79
2) MONITORING TIME	79
3) LOWER MONITORING THRESHOLD.....	79
4) MAXIMUM TRANSMIT PERIOD	80
5) SYSTEM ACKNOWLEDGEMENT	80
6) LEAST INTERFERED CHANNEL (LIC)	81
7) RANDOM WAITING	83
8) MONITORING BANDWIDTH AND REACTION TIME	84
9) MONITORING ANTENNA.....	85
10) MONITORING THRESHOLD RELAXATION	85
11) DUPLEX CONNECTIONS.....	85
12) ALTERNATIVE MONITORING INTERVAL	87
13) FAIR ACCESS	88
14) FRAME REPETITION STABILITY FRAME PERIOD AND JITTER	88
EUT PHOTOGRAPHS.....	90
TEST SETUP PHOTOGRAPHS	91

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601R48888E-RF	Original Report	2026/06/25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	H200
FVIN	9999_b9978
Frequency Range	1921.536-1928.448 MHz
Maximum conducted peak output power	18.91dBm
Modulation Technique	GFSK
Antenna Specification [#]	ANT 1: 2.9dBi, ANT 2: 4.3dBi (It is provided by the applicant)
Voltage Range	DC 5V from adapter or DC 3.7V from battery
Sample serial number	3IOS-17 for AC Line Conducted Emissions and Radiated Emissions Test 3IOS-16 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: S005CAU0500100 Input: 100-240V~50/60Hz 200mA Output: 5.0V = 1000mA

Objective

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.317, 15.319, 15.323 and 15.207 rules. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 – 2013 and RSS-213 Issue 3, 2GHz License-Exempt Personal Communications Service Devices (PCS) OF THE Canadian Department of Industry rules and RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2013, American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices, RSS-213 Issue 3, 2GHz License-Exempt Personal Communications Service Devices (PCS) OF THE Canadian Department of Industry rules and RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured to testing mode which is provided by the manufacturer.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	Receptacle	PDU-OP1606K	6971041358020
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC cable	1.2	AC Mains/LISN	Receptacle
Unshielded Detachable DC cable	1.6	Adapter	Charger
Unshielded Detachable AC cable	1.2	AC Mains	CMD60

Block Diagram of Test Setup


For conducted emission

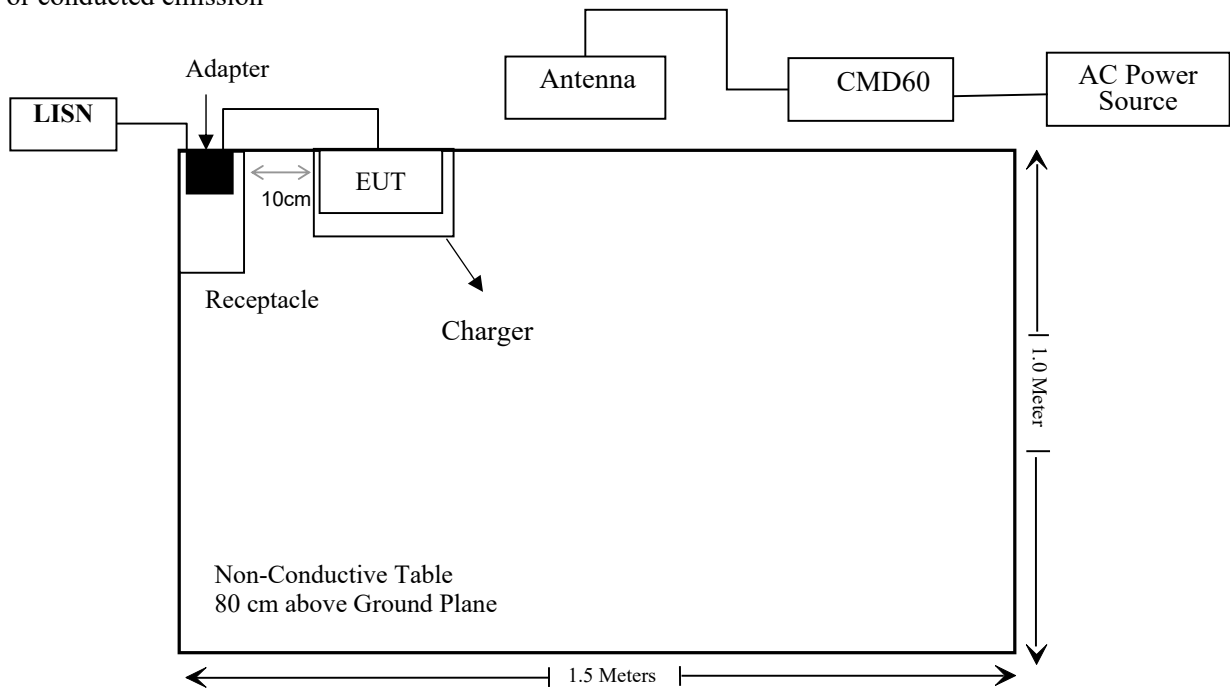

For Radiated Emissions below 1GHz:

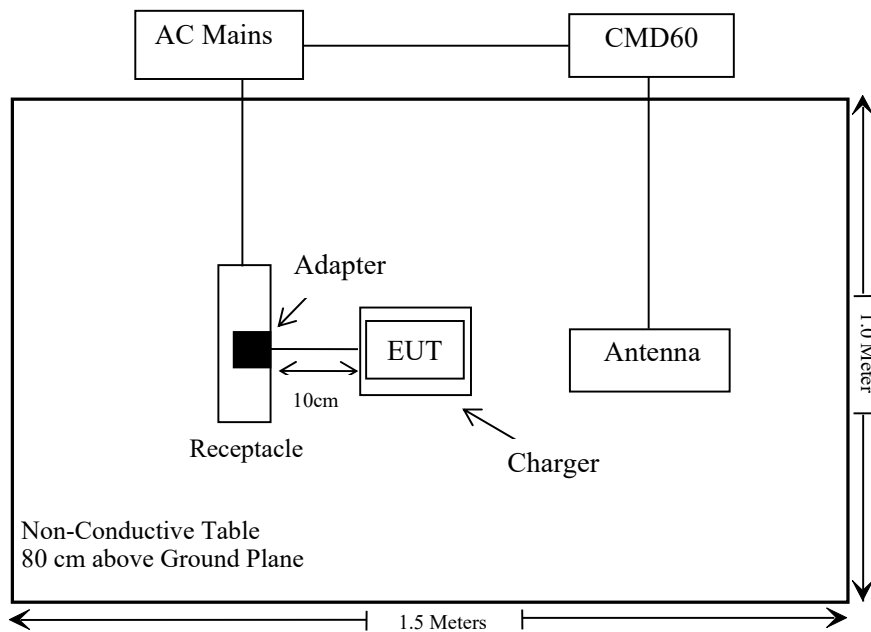

For Radiated Emissions above 1GHz:

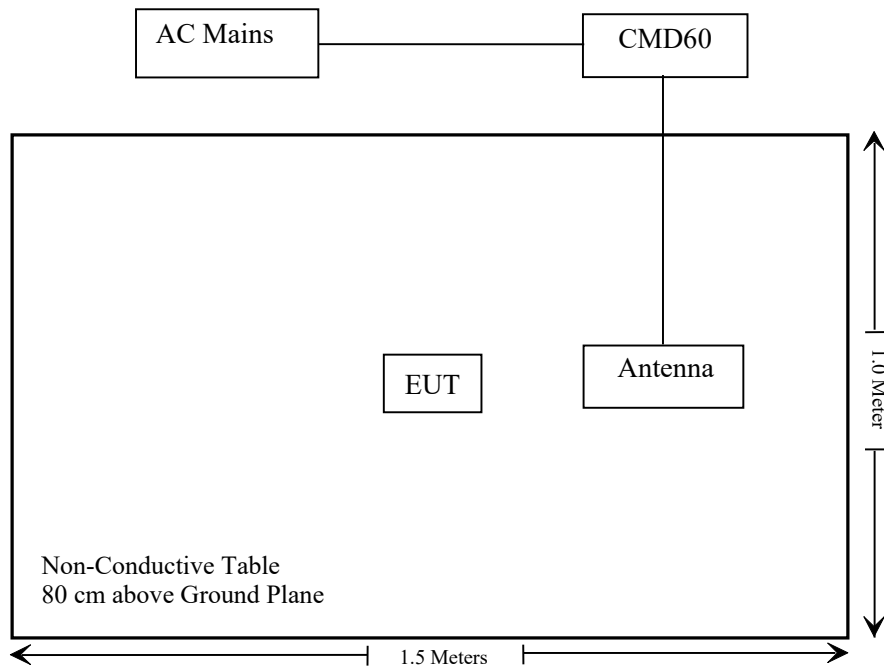

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§ 1.1307 & 2.1093	RSS-102	RF EXPOSURE	Compliant
§ 15.317, § 15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§ 15.315, § 15.207	RSS-213 §5.4	AC Line Conducted Emissions	Compliant
§ 15.323 (a)	RSS-213 §5.5	Emission Bandwidth	Compliant
§ 15.319 (c)	RSS-213 §5.6	Peak Transmit Power	Compliant
§ 15.319 (d)	RSS-213 §5.7	Power Spectral Density	Compliant
§ 15.323 (d)	RSS-213 §5.8	Emission Inside and Outside the sub-band	Compliant
§15.205, §15.209, § 15.319 (g)	RSS-213 §5.8	Radiated Emission	Compliant
§ 15.323 (f)	RSS-213 §5.3	Frequency Stability	Compliant
§ 15.323 (c)(e) § 15.319 (f)	RSS-213 §5.1&§5.2	Specific Requirements for UPCS	Compliant

Note: This device has two antennas, and they cannot work simultaneously. The antenna is randomly selected based on the signal strength. So the ANT2 which with the highest output power was selected to perform full test.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018	2025/09/18	2026/09/17
Keysight	MXG Vector Signal Generator	N5182B	MY53051503	2025/09/18	2026/09/17
Unknown	RF Cable	Cable RF2	Cable RF2	2025/09/17	2026/09/16
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25
HP	Power Splitter	11667A	1610A	2025/06/26	2026/06/25
BACL	High Low TEMP Test Chamber	BTH-150-40	30144	2025/09/11	2026/09/10
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2025/04/29	2026/04/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1307 and §2.1093.

Test Result

Compliant, please refer to the SAR report: 2601R48888E-SAA.

RSS-102 - RF EXPOSURE

Applicable Standard

According to RSS-102 Issue 6, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Result: Compliant

Please refer to SAR Report Number: 2601R48888E-SAB.

FCC § 15.317, § 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8,

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two antennas which were permanently attached and the maximum antenna gain[#] is ANT 1: 2.9dBi, ANT 2: 4.3dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Type	Antenna Gain [#]	Impedance
Monopole	2.9dBi	50Ω
	4.3dBi	50Ω

FCC § 15.315, § 15.207 & RSS-213 §5.4 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.315, §15.207(a), RSS-213 §5.4, RSS-GEN § 8.8.

EUT Setup

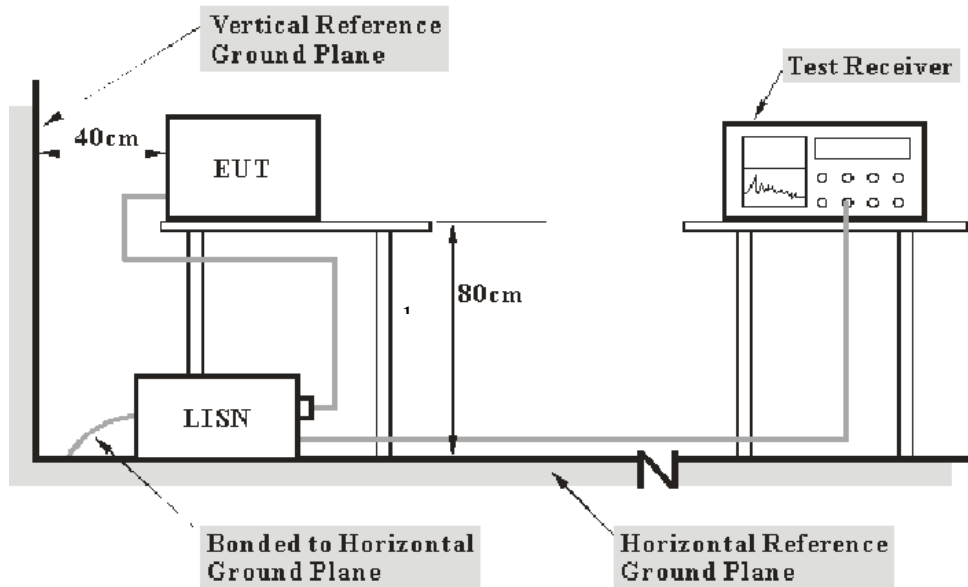

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data


Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	62 %
ATM Pressure:	100.4 kPa

The testing was performed by Macy Shi on 2026-05-29.

EUT operation mode: Transmitting (Maximum output power mode: ANT2 Low Channel)

AC 120V/60 Hz, Line

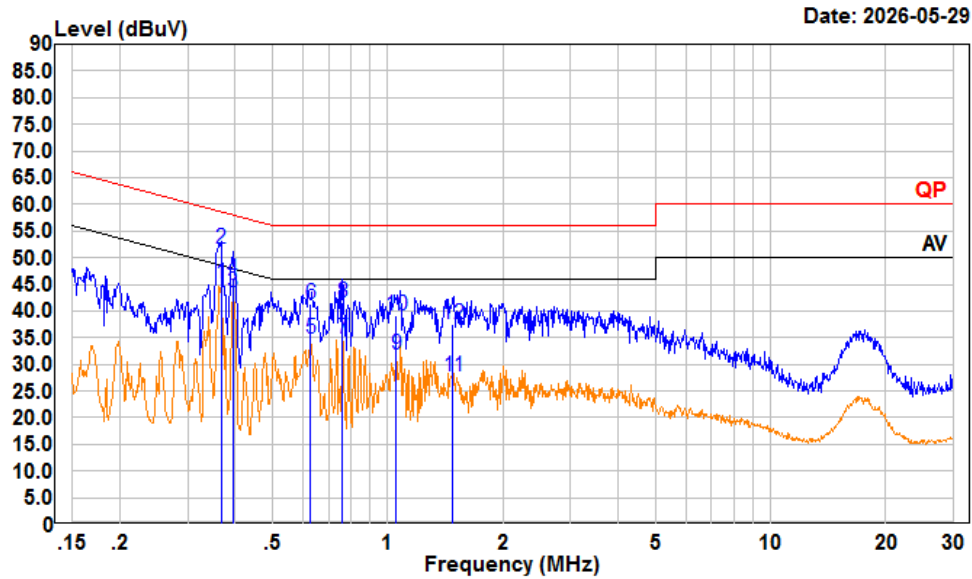

Condition: Line


Project : 2601R48888E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.368	25.40	45.13	9.70	10.03	48.56	-3.43	Average
2	0.368	32.00	51.73	9.70	10.03	58.56	-6.83	QP
3	0.394	23.91	43.64	9.70	10.03	47.97	-4.33	Average
4	0.394	26.34	46.07	9.70	10.03	57.97	-11.90	QP
5	0.628	15.01	34.75	9.70	10.04	46.00	-11.25	Average
6	0.628	21.69	41.43	9.70	10.04	56.00	-14.57	QP
7	0.762	14.92	34.71	9.75	10.04	46.00	-11.29	Average
8	0.762	21.79	41.58	9.75	10.04	56.00	-14.42	QP
9	1.053	11.70	31.82	9.90	10.22	46.00	-14.18	Average
10	1.053	19.16	39.28	9.90	10.22	56.00	-16.72	QP
11	1.479	7.69	27.80	9.90	10.21	46.00	-18.20	Average
12	1.479	17.54	37.65	9.90	10.21	56.00	-18.35	QP

AC 120V/60 Hz, Neutral

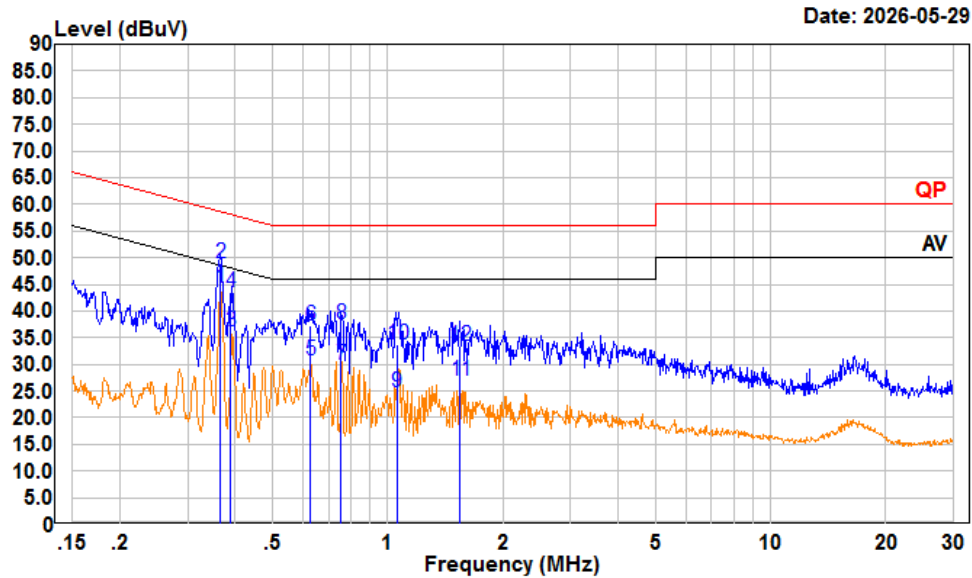

Condition: neutral

Project : 2601R48888E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.366	24.61	44.24	9.60	10.03	48.59	-4.35	Average
2	0.366	29.21	48.84	9.60	10.03	58.59	-9.75	QP
3	0.389	16.51	36.14	9.60	10.03	48.09	-11.95	Average
4	0.389	23.89	43.52	9.60	10.03	58.09	-14.57	QP
5	0.628	11.09	30.73	9.60	10.04	46.00	-15.27	Average
6	0.628	17.74	37.38	9.60	10.04	56.00	-18.62	QP
7	0.753	10.24	29.88	9.60	10.04	46.00	-16.12	Average
8	0.753	17.87	37.51	9.60	10.04	56.00	-18.49	QP
9	1.058	4.82	24.64	9.60	10.22	46.00	-21.36	Average
10	1.058	14.00	33.82	9.60	10.22	56.00	-22.18	QP
11	1.548	7.18	26.99	9.60	10.21	46.00	-19.01	Average
12	1.548	13.52	33.33	9.60	10.21	56.00	-22.67	QP

FCC § 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH

Applicable Standard

According to FCC §15.323(a):


Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

According to RSS-213§ 5.5:

The emission bandwidth shall not be less than 50 kHz nor more than 2.5 MHz.

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

Test Setup 1:

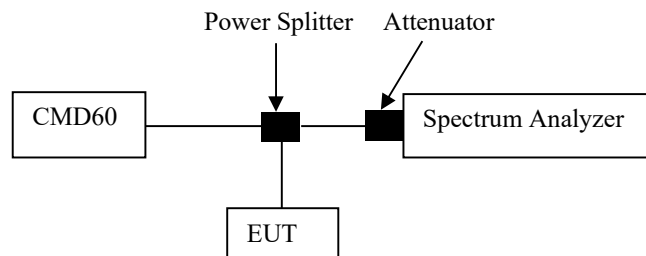

Note: Offset (10.5dB) = Attenuator (10dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 17.5dB

The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

Resolution bandwidth	1.0% of the emission bandwidth (as close as possible)
Video bandwidth	>3 times the resolution bandwidth
Number of sweeps	sufficient to stability the trace
Detection mode	peak detection with maximum hold

EBW:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

OBW:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2026-04-09.


Test mode: Transmitting

Test Result: Compliant

Channel	Center Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Limit
Low	1921.536	1.227	1.416	50 kHz ~ 2.5 MHz
Middle	1924.992	1.218	1.425	50 kHz ~ 2.5 MHz
High	1928.448	1.218	1.419	50 kHz ~ 2.5 MHz


99% Emission Bandwidth

Low Channel

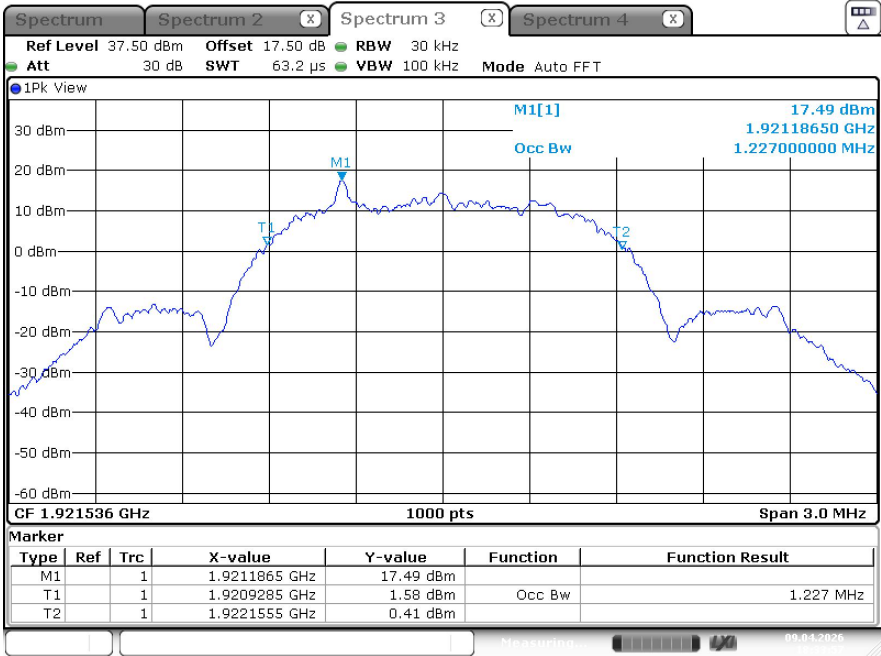


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:33:58

Middle Channel

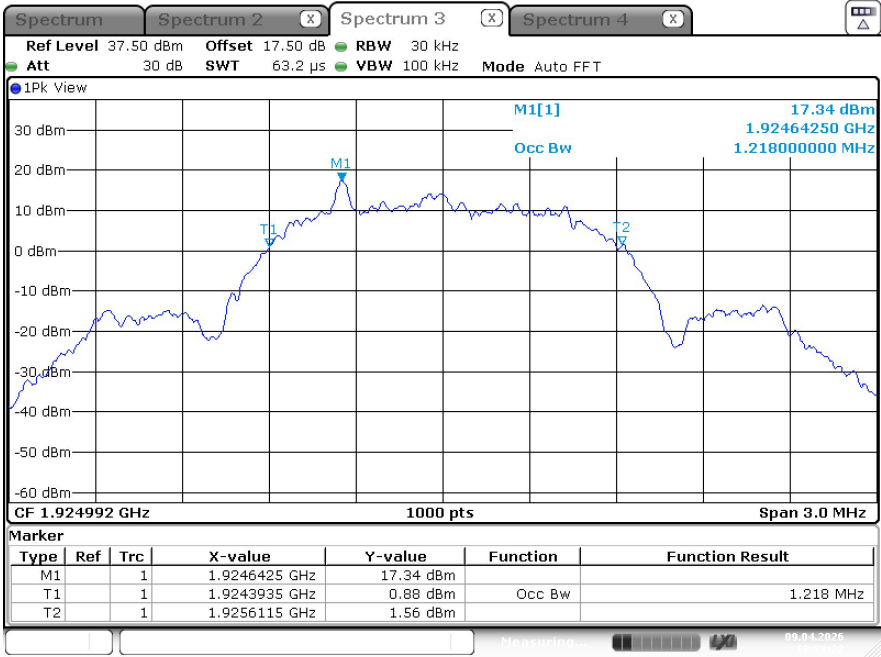

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:33:23


High Channel

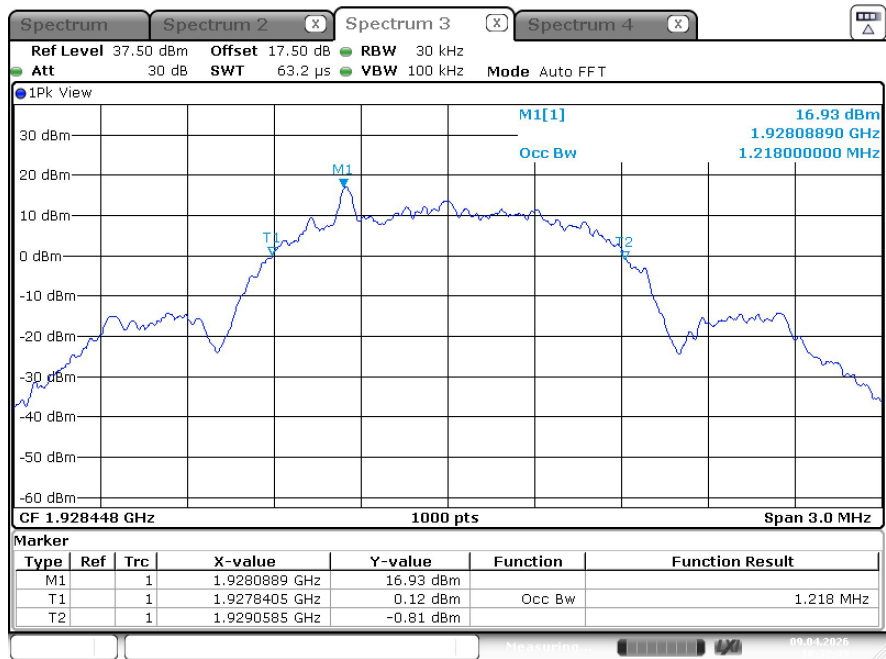

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:32:49


26 dB Emission Bandwidth

Low Channel

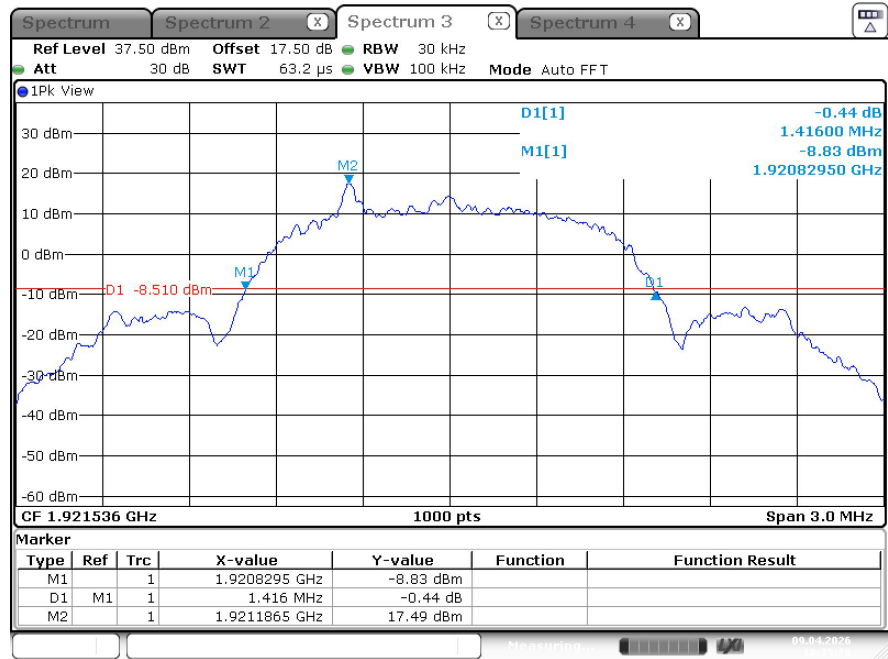


ProjectNo.:2601R4888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:35:28

Middle Channel

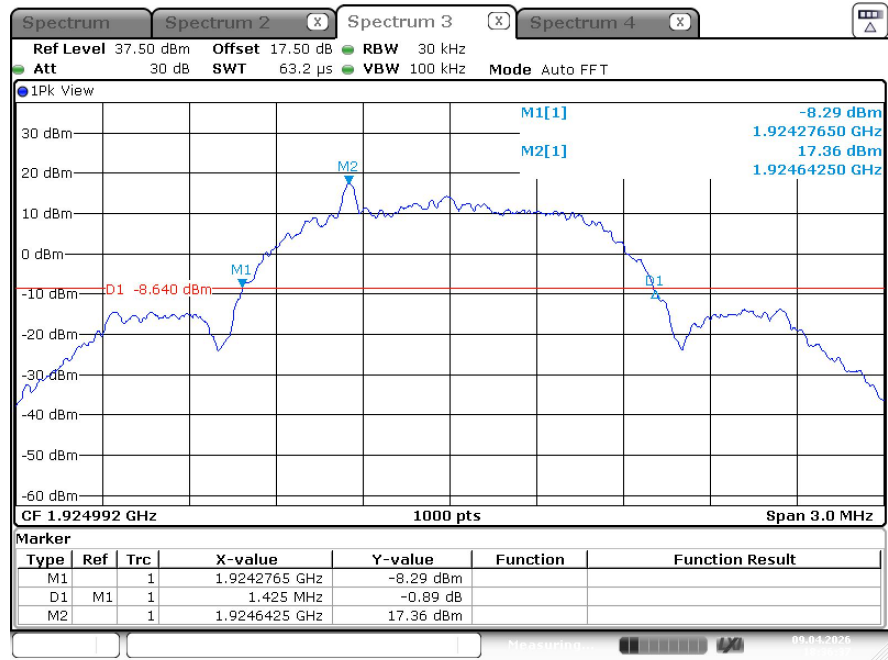

ProjectNo.:2601R4888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:36:37

High Channel

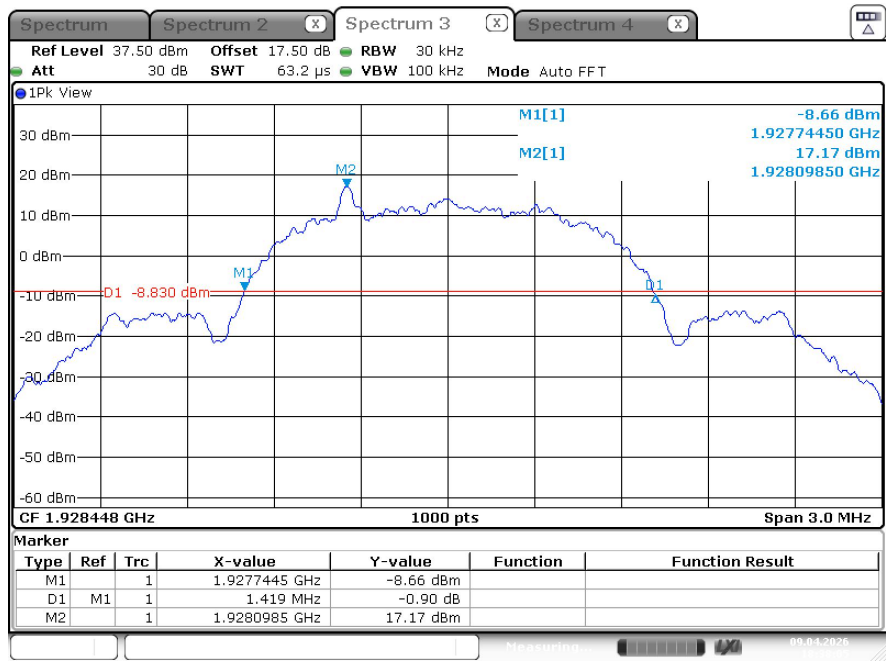

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:38:06

FCC § 15.319 (c) & RSS-213 §5.6 PEAK TRANSMIT POWER

Applicable Standard

The peak power output as measured over an interval of time equal to the frame rate or transmission burst of the device under all conditions of modulation. Usually this parameter is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used[47 CFR 15, subpart D, 15.303].

The peak transmit power is according to ANSI C63.17-2013 §6.1.2

Per FCC Part15.319 (c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Per FCC Part15.319 (e), the peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit:

$$\text{Peak Transmit Power Limit} = 100\mu\text{W} \times (\text{EBW})^{1/2}$$


EBW is the transmit emission bandwidth in Hz determined in the other test item:

Per RSS-213 §5.6, Peak transmit power shall not exceed 100 μW multiplied by the square root of the occupied bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	$\geq$ Emission bandwidth
Video bandwidth	$\geq$ RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

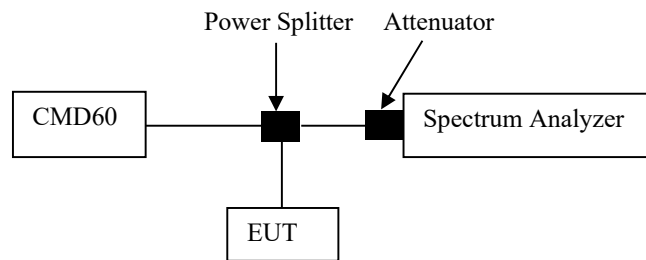

Note: Offset (10.5dB) = Attenuator (10dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 10.5dB

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2026-04-09.


Test mode: Transmitting:

Test Result: Compliant. Please refer to the following table and plots.

Channel	Frequency (MHz)	Peak Transmit Power (dBm)	FCC Limit (dBm)	ISED Limit (dBm)
ANT 1				
Low	1921.536	18.81	20.76	20.44
Middle	1924.992	18.75	20.77	20.43
High	1928.448	18.66	20.76	20.43
ANT 2				
Low	1921.536	18.91	19.46	19.14
Middle	1924.992	18.81	19.47	19.13
High	1928.448	18.72	19.46	19.13
Note: For FCC: Peak Transmit Power Limit = $100(\text{EBW})^{1/2} \mu\text{W}$ For ISED: Peak Transmit Power Limit = $100(\text{OBW})^{1/2} \mu\text{W}$ For ANT2, the antenna gain is 4.3dBi > 3dBi, so the limit shall be reduced by the (4.3-3)dB				


ANT 1

Low Channel

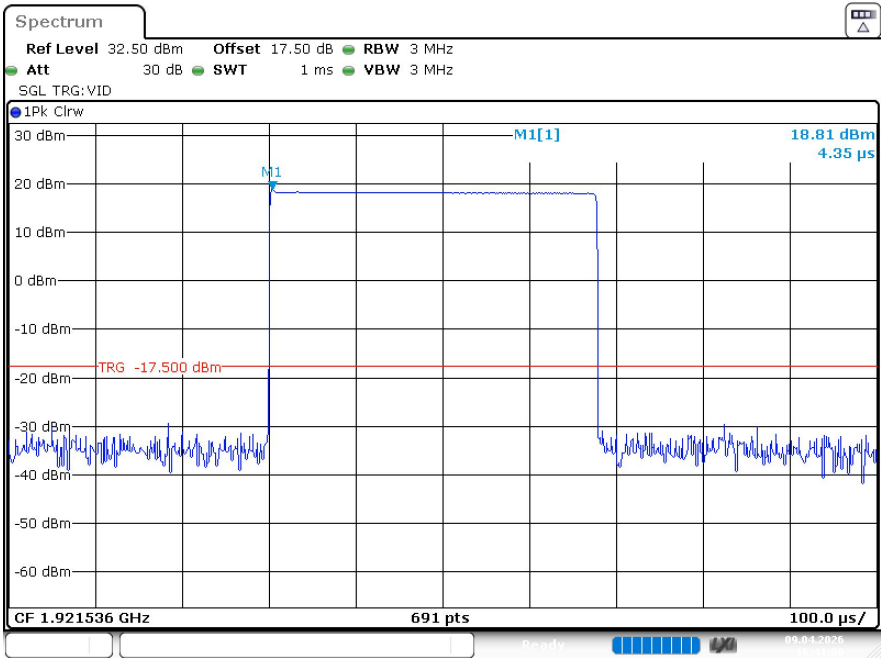


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:41:01

Middle Channel

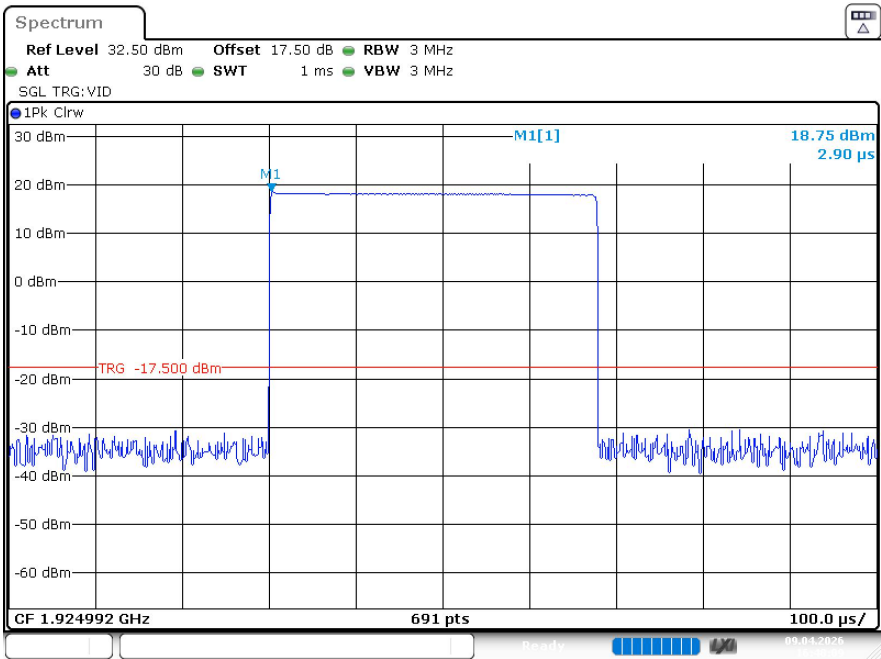

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:40:10


High Channel

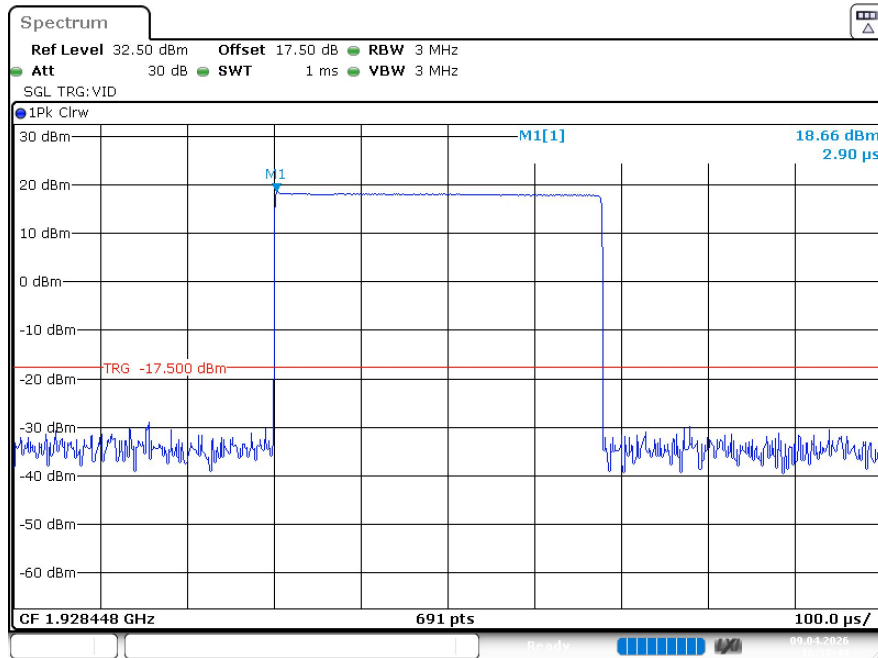

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
 Date: 9.APR.2026 16:38:45


ANT 2

Low Channel

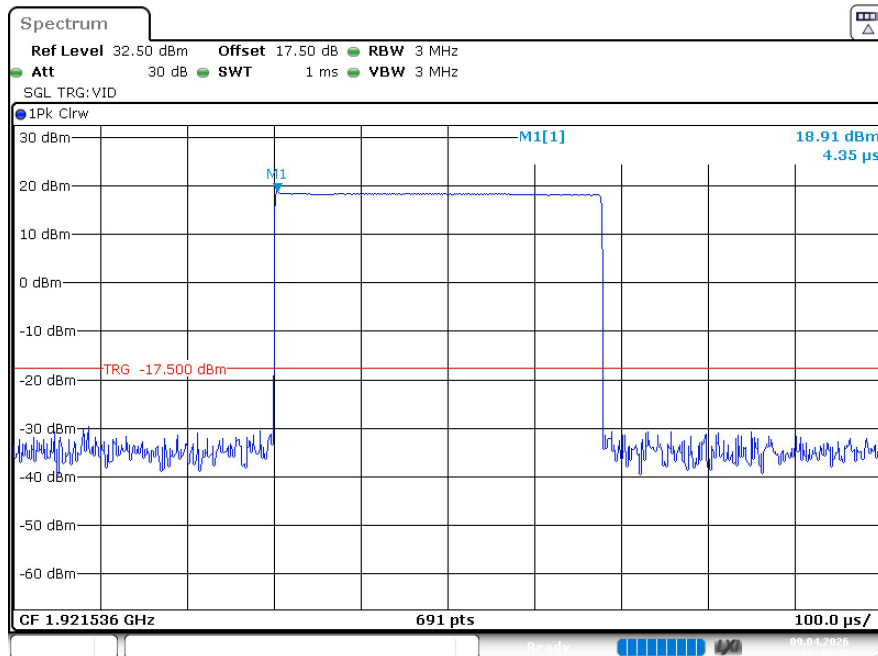


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
 Date: 9.APR.2026 16:43:35

Middle Channel

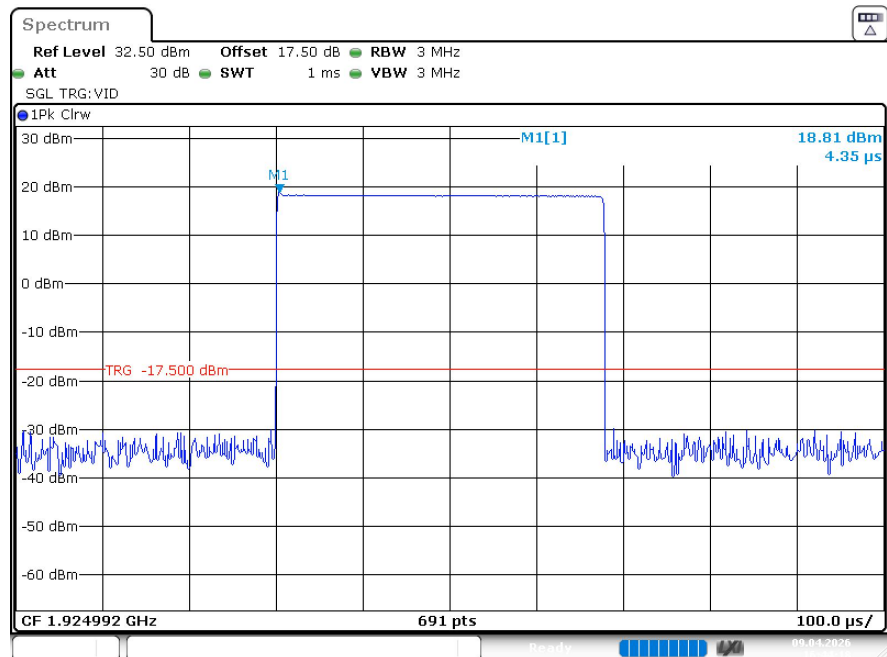

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:44:18

High Channel

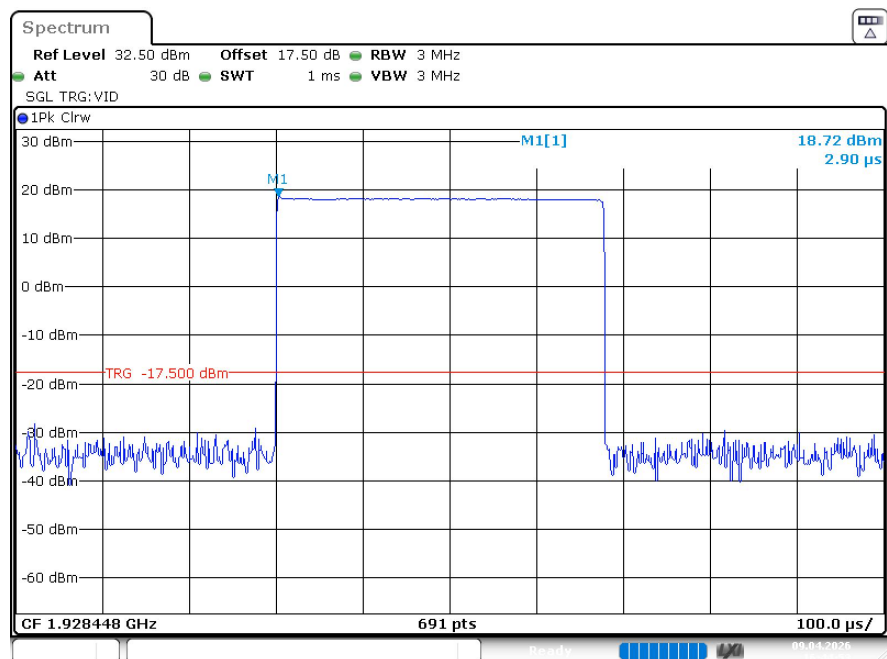

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:44:53

FCC § 15.319 (d) & RSS-213 §5.7 POWER SPECTRAL DENSITY

Applicable Standard

According to FCC § 15.319 (d):

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

The power spectral density is measured in accordance with ANSI C63.17-2013 Clause 6.1.5.


According to RSS-213 §5.7:

The peak-hold power spectral density of transmitters shall not exceed 12 mW per any 3 kHz bandwidth. As an alternative to the peak-hold power spectral density, the time-averaged power spectral density may be measured and it shall not exceed 3 mW per any 3 kHz bandwidth.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

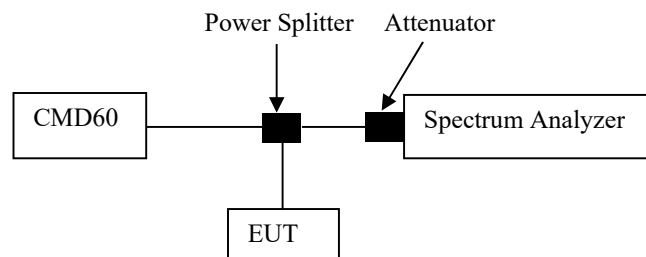

Note: Offset (10.5dB) = Attenuator (3dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 17.5dB

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2026-04-09.


Test mode: Transmitting

Test Result: Compliant


Please refer to following table and plots

Channel	Frequency (MHz)	Power Spectral Density		Limit (mW/3kHz)
		(dBm/3kHz)	(mW/3kHz)	
Low	1921.536	-0.45	0.902	3
Middle	1924.992	-1.14	0.769	3
High	1928.448	-1.41	0.723	3

Low Channel

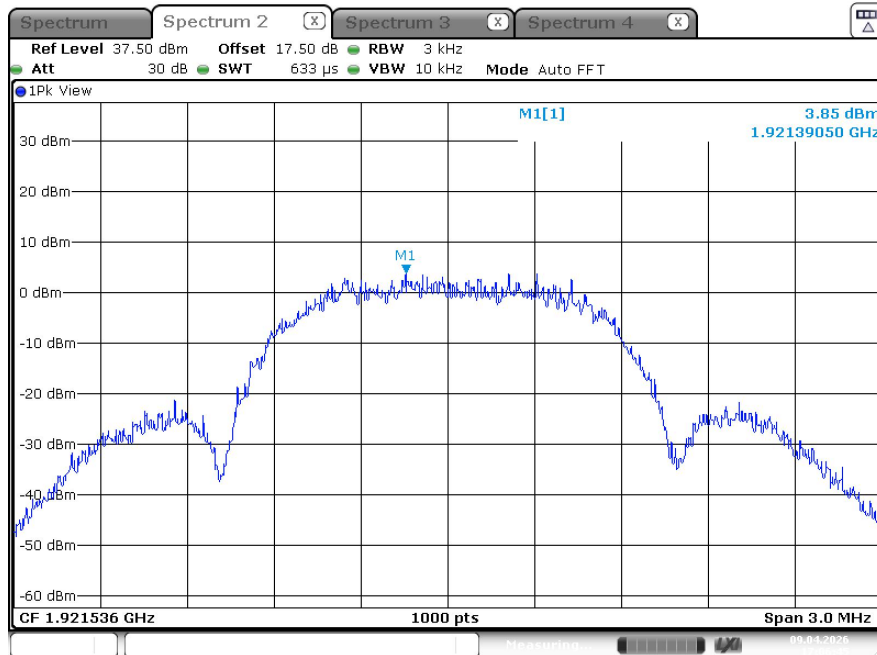


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
 Date: 9.APR.2026 17:06:46

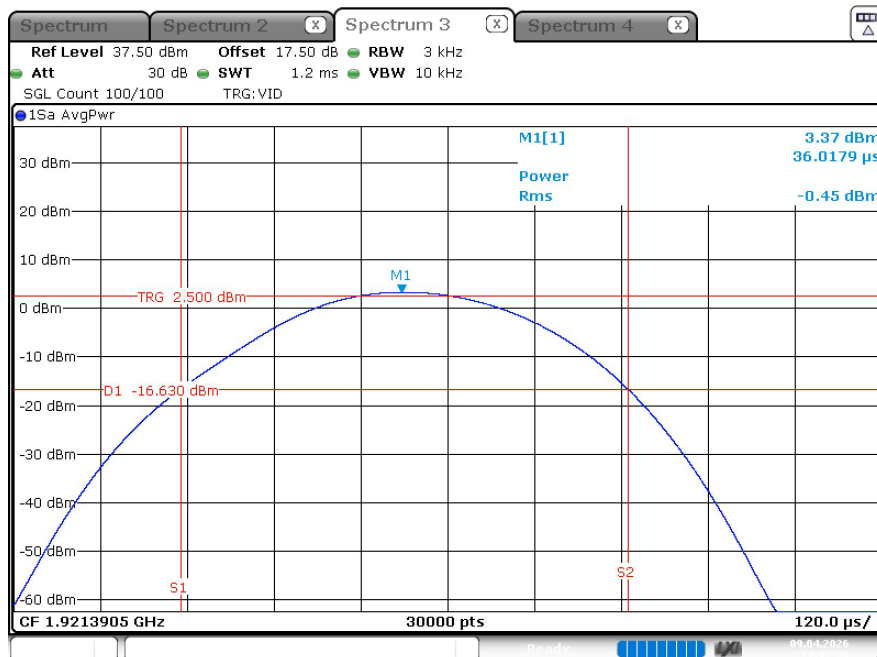


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
 Date: 9.APR.2026 17:12:23

Middle Channel

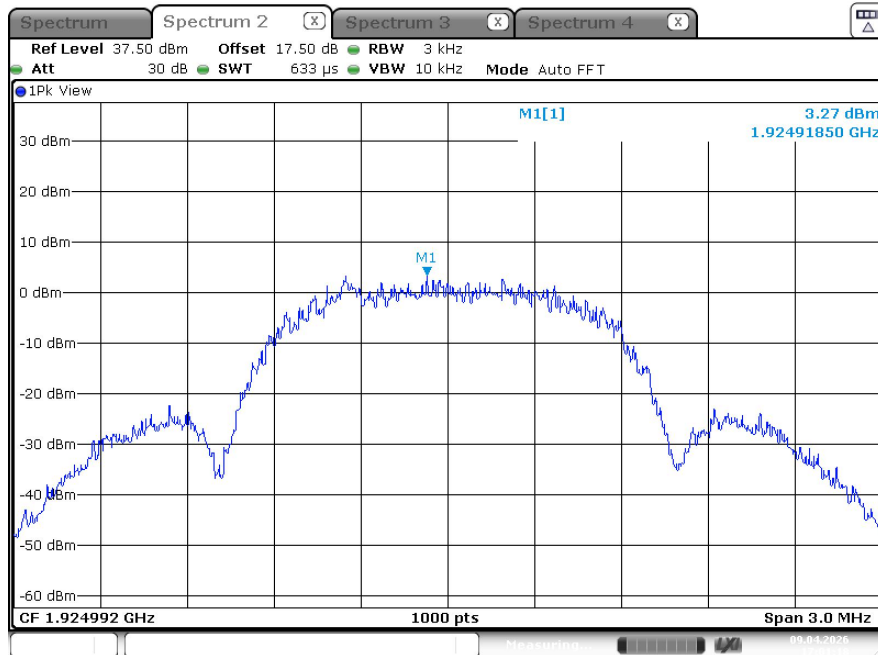


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 17:01:19

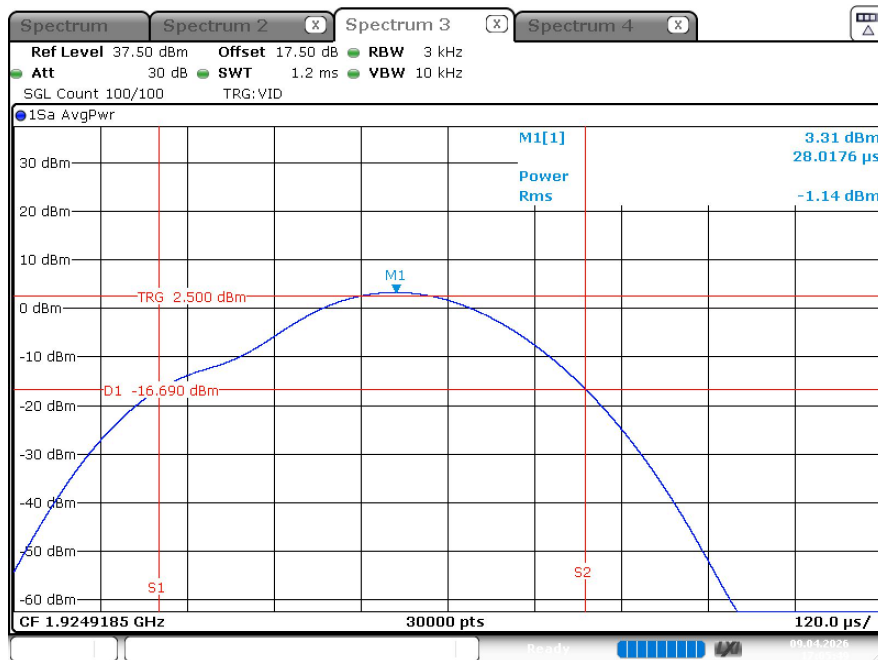


ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 17:05:49

High Channel

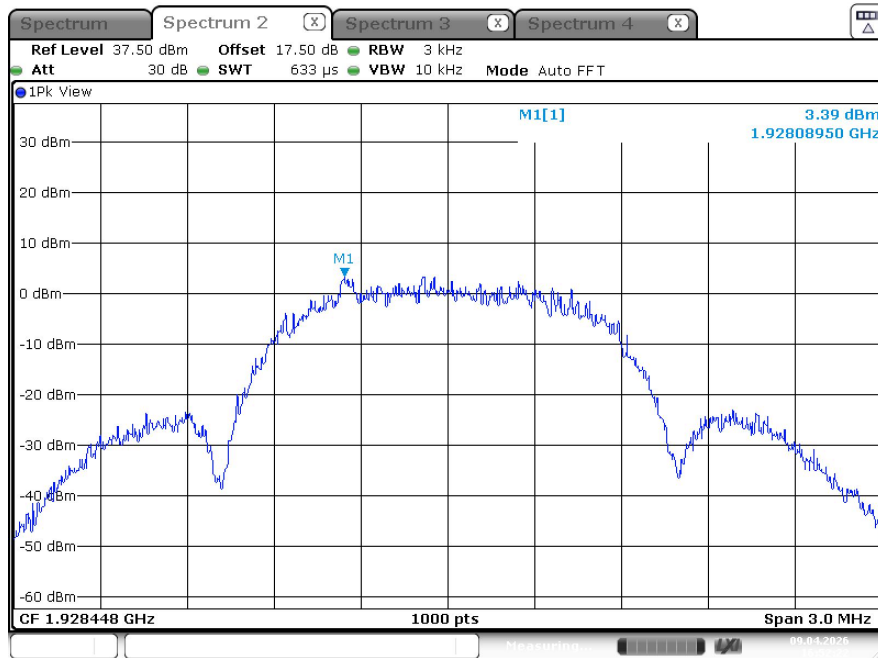

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:52:22

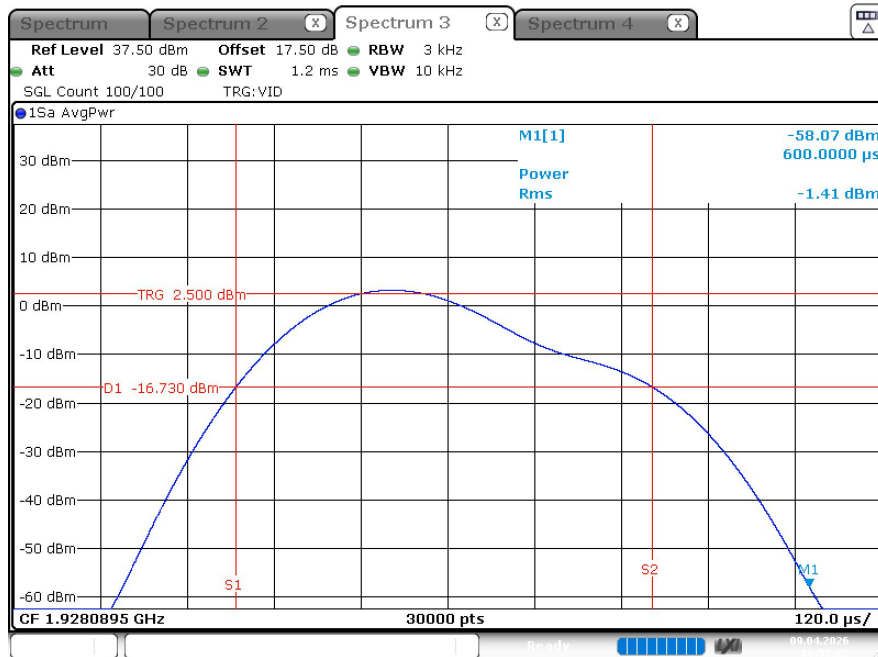

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 16:59:22

FCC § 15.323 (d) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND

Applicable Standard

According to FCC § 15.323 (d):

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5 dBm) as follows:

1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
3. 60 dB at 2.5 MHz or greater above or below the sub-band.

According to RSS-213 §5.8:

Emissions outside the 1920-1930 MHz Band

Emissions outside the 1920-1930 MHz band shall be attenuated below a reference power of 112 milliwatts (-9.5 dBW) by at least:

- 30 dB between the band edges and 1.25 MHz above and below the band edges;
- 50 dB between 1.25 MHz and 2.5 MHz above or below the band edges; and
- 60 dB at 2.5 MHz or greater above or below the band edges.

Emissions inside the 1920-1930 MHz Band

Emissions inside the 1920-1930 MHz band shall be attenuated below the transmit power permitted for that device, as follows:

- 30 dB between the frequencies 1B and 2B measured from the centre of the occupied bandwidth;
- 50 dB between the frequencies 2B and 3B measured from the centre of the occupied bandwidth; and
- 60 dB between the frequencies 3B and band edge, where B is the occupied bandwidth in hertz.

Test Procedure

According to ANSI C63.17.2013 Clause 6.1.6.

In-band emission:

Spectrum analyzer settings for measuring in-band emission

RBW	Approximately 1% of the emission bandwidth (B)
Video bandwidth	$3 \times \text{RBW}$
Sweep time	The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts.
Number of sweeps	Sufficient to stabilize the trace
Amplitude scale	Log
Detection	Peak detection and max hold enabled
Span	Approximately equal to $3.5 B$

Out-band emission:

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and item d), as follows:

- a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -9.5 dBm .
- b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -29.5 dBm .
- d) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.

For Radiated Emission:

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak
Above 1 GHz	Fundamental & Harmonics				
	1MHz	3 MHz	/	PK	Peak
	Average level= Peak level+ 20lg (Duty cycle)				
	Other Emissions				
	1MHz	3 MHz	/	PK	Peak
	1MHz	≥10 Hz	/	Average	Peak

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:


$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:


$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

EUT Setup


9 kHz-30MHz:

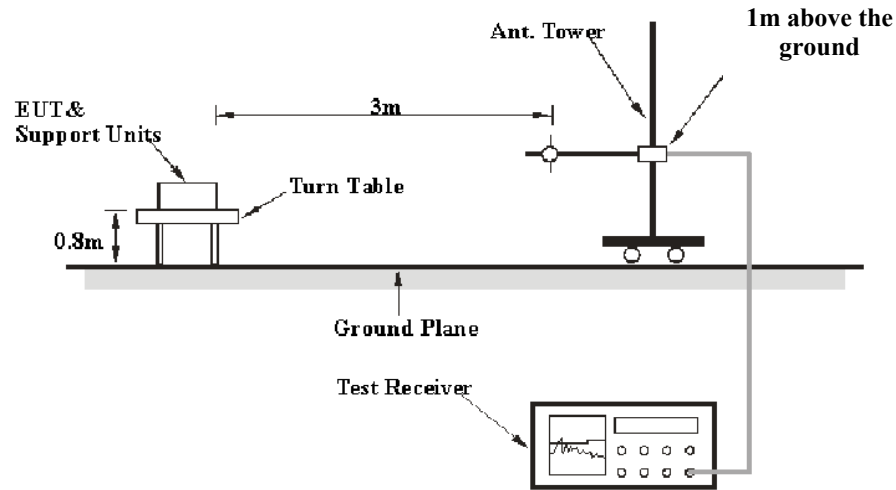

30MHz-1GHz:

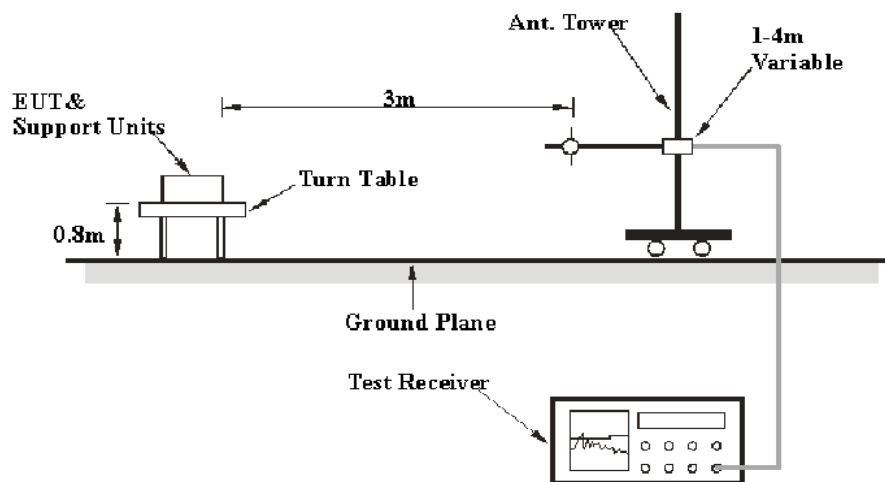


Above 1GHz:

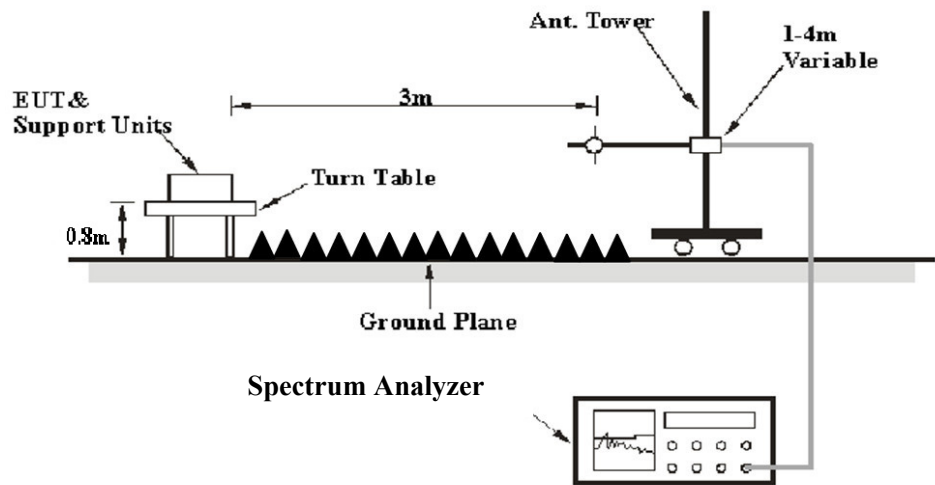

The radiated emission tests were performed in the 3 meters test site.

RF Conducted Emission:

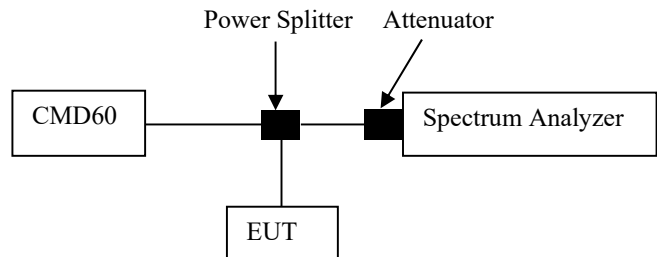

Note: Offset (10.5dB) = Attenuator (10dB) + (Cable loss 1 + Cable loss 2) (1.5dB) + Splitter insert loss (6dB) = 17.5dB

Test Data

Environmental Conditions

Temperature:	19.7~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101~101.5 kPa

The testing was performed by Anson Su on 2026-04-17 for below 1GHz, Leon Guo on 2026-04-02 for above 1GHz and Cheeb Huang on 2026-04-09 for RF conducted.


Test mode: Transmitting

Test Result: Compliant

Please refer to following plots


FCC:

Low Channel (Unwanted Emission inside the Sub-band)

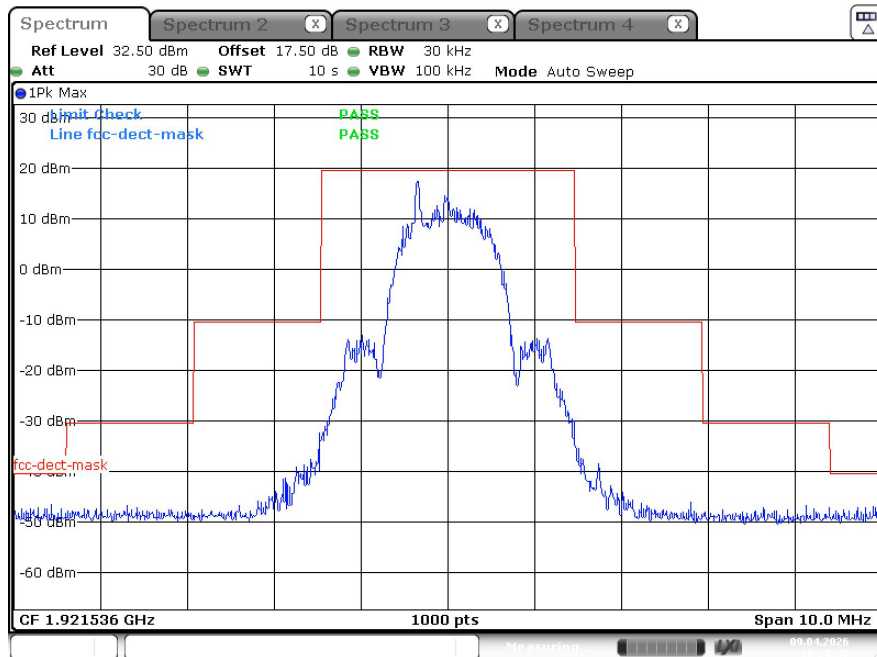

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:25:37

Middle Channel (Unwanted Emission inside the Sub-band)

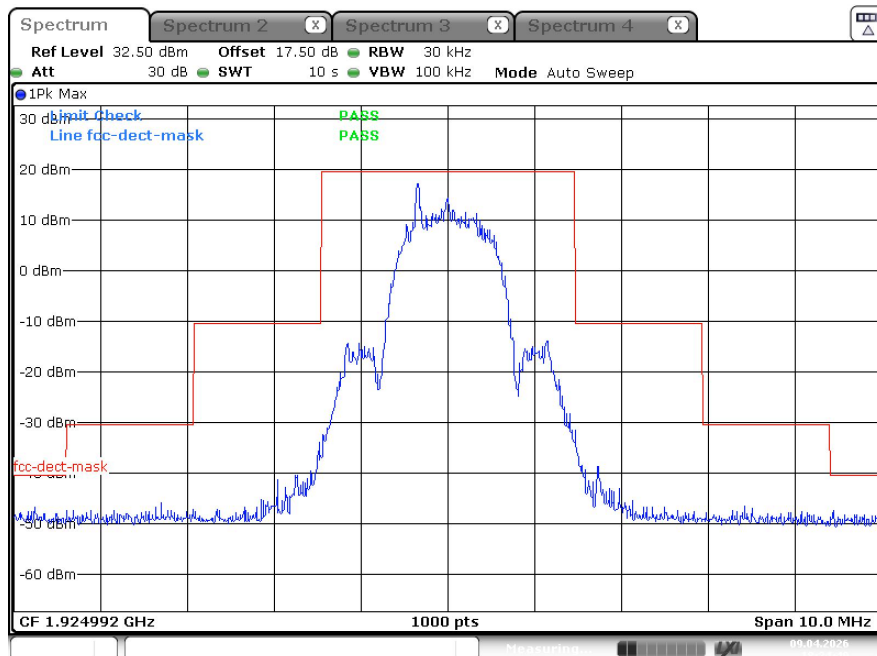

ProjectNo.:2601R48888E-RF Tester:Cheeb Huang
Date: 9.APR.2026 18:24:41