

TEST REPORT

Applicant Name: RTX Hong Kong Ltd.
Address: 8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay,
Hong Kong
Report Number: 2501A92967E-RFC
FCC ID: T7HXB700
IC: 4979B-XB700

Test Standard (s)

FCC PART 15D; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;
RSS-213, ISSUE 3, MARCH 2015

Sample Description

Product Type: Base EU
Model No.: B700
Multiple Model(s) No.: B730
Trade Mark: RTX
Date Received: 2025/12/25
Issue Date: 2026/05/25

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, Futian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE	5
TEST METHODOLOGY.....	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §1.1307(B) & §2.1091 - RF EXPOSURE EVALUATION	14
APPLICABLE STANDARD	14
RESULT	14
RSS-102 § 6.6 - FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS	15
APPLICABLE STANDARD	15
RESULT	15
FCC § 15.317, § 15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC § 15.315, § 15.207 & RSS-213 §5.4 AC LINE CONDUCTED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP	17
TEST PROCEDURE.....	18
FACTOR & OVER LIMIT CALCULATION.....	18
TEST DATA.....	18
FCC § 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH	23
APPLICABLE STANDARD	23
TEST PROCEDURE.....	23
TEST DATA.....	24
FCC § 15.319 (C) & RSS-213 §5.6 PEAK TRANSMIT POWER	41
APPLICABLE STANDARD	41
TEST PROCEDURE.....	41
TEST DATA.....	42
FCC § 15.319 (D) & RSS-213 §5.7 POWER SPECTRAL DENSITY.....	55
APPLICABLE STANDARD	55
TEST PROCEDURE.....	55

TEST DATA.....	56
FCC § 15.323 (D) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND	69
APPLICABLE STANDARD	69
TEST PROCEDURE.....	70
FACTOR & OVER LIMIT/MARGIN CALCULATION	71
EUT SETUP	71
TEST DATA.....	73
FCC § 15.323 (F) & RSS-213 §5.3 FREQUENCY STABILITY	198
APPLICABLE STANDARD	198
TEST PROCEDURE.....	198
TEST DATA.....	199
FCC § 15.323 (C)(E)§ 15.319 (F) & RSS-213 §5.1&§5.2 SPECIFIC REQUIREMENTS FOR UPCS DEVICE	202
APPLICABLE STANDARD	202
TEST PROCEDURE.....	202
TEST DATA.....	202
1) AUTOMATIC DISCONTINUATION OF TRANSMISSION	203
2) MONITORING TIME.....	203
3) LOWER MONITORING THRESHOLD.....	203
4) MAXIMUM TRANSMIT PERIOD	204
5) SYSTEM ACKNOWLEDGEMENT.....	204
6) LEAST INTERFERED CHANNEL (LIC)	205
7) RANDOM WAITING	207
8) MONITORING BANDWIDTH AND REACTION TIME	208
9) MONITORING ANTENNA.....	209
10) MONITORING THRESHOLD RELAXATION	209
11) DUPLEX CONNECTIONS.....	209
12) ALTERNATIVE MONITORING INTERVAL	211
13) FAIR ACCESS.....	212
14) FRAME REPETITION STABILITY FRAME PERIOD AND JITTER.....	212
EUT PHOTOGRAPHS	214
TEST SETUP PHOTOGRAPHS	215

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501A92967E-RFC	Original Report	2026/05/25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	B700, B730
FVIN	V040_D3
Product	Base EU
Tested Model	B700
Multiple Model(s)	B730
Frequency Range	1921.536-1928.448 MHz
Maximum conducted peak output power	18.94dBm
Modulation Technique	GFSK, $\pi/2$ -DBPSK, $\pi/4$ -DQPSK, $\pi/8$ -D8PSK
Antenna Specification [#]	ANT1: 0.6dBi, ANT2: 2.3dBi (It is provided by the manufacturer)
Voltage Range	DC5V from adapter or DC 55V from POE
Sample serial number	3F2T-2 for AC Line Conducted Emissions and Radiated Emissions Test 3F2T-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: S005CAU0500100 Input: 100-240V~50/60Hz, 200mA Output: 5.0V=1000mA
Note: The Multiple models are electrically identical with the test model except for Model Number, Software but does not cause any deviation of type approval, dual/multi cell feature and adapter. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart D, section 15.207, 15.315, 15.317, 15.319 and 15.323 rules. The EMI measurements were performed according to the measurement procedure described in ANSI C63.17 – 2013 and RSS-213 Issue 3, 2GHz License-Exempt Personal Communications Service Devices (PCS) OF THE Canadian Department of Industry rules and RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.17 - 2013, American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices, RSS-213 Issue 3, 2GHz License-Exempt Personal Communications Service Devices (PCS) OF THE Canadian Department of Industry rules and RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
RF output power, conducted		1.57dB(k=1.96, 95% level of confidence)
Conducted Spurious Emission		2.48dB(k=1.96, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.46dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.66dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured to testing mode which is provided by the manufacturer.

EUT Exercise Software

“sscom v5.13.1.exe/cvm Host App-v0034.exe #” exercise software was used and the power level is default#. The software and power level was provided by the manufacturer.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830861/018
OUPU	Socket	PDU-OP1606K	6971041358020
TP-link	POE	TL-POE4824G	N/A
JianJie	SIP server	1S1O	DD12-0106-2014-0109


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded un-detachable AC cable	1.2	Socket	LISN/AC Power Source
Unshielded detachable USB cable	1.2	EUT	Adapter
Unshielded detachable RJ45 cable	0.6	EUT	POE
Unshielded detachable RJ45 cable	10.0	EUT	POE
Unshielded detachable RJ45 cable	1.5	POE	SIP server
Unshielded detachable AC cable	1.2	POE	AC Power Source
Unshielded detachable AC cable	0.5	POE	Socket


Block Diagram of Test Setup

AC Line Conducted Emissions:

Adapter

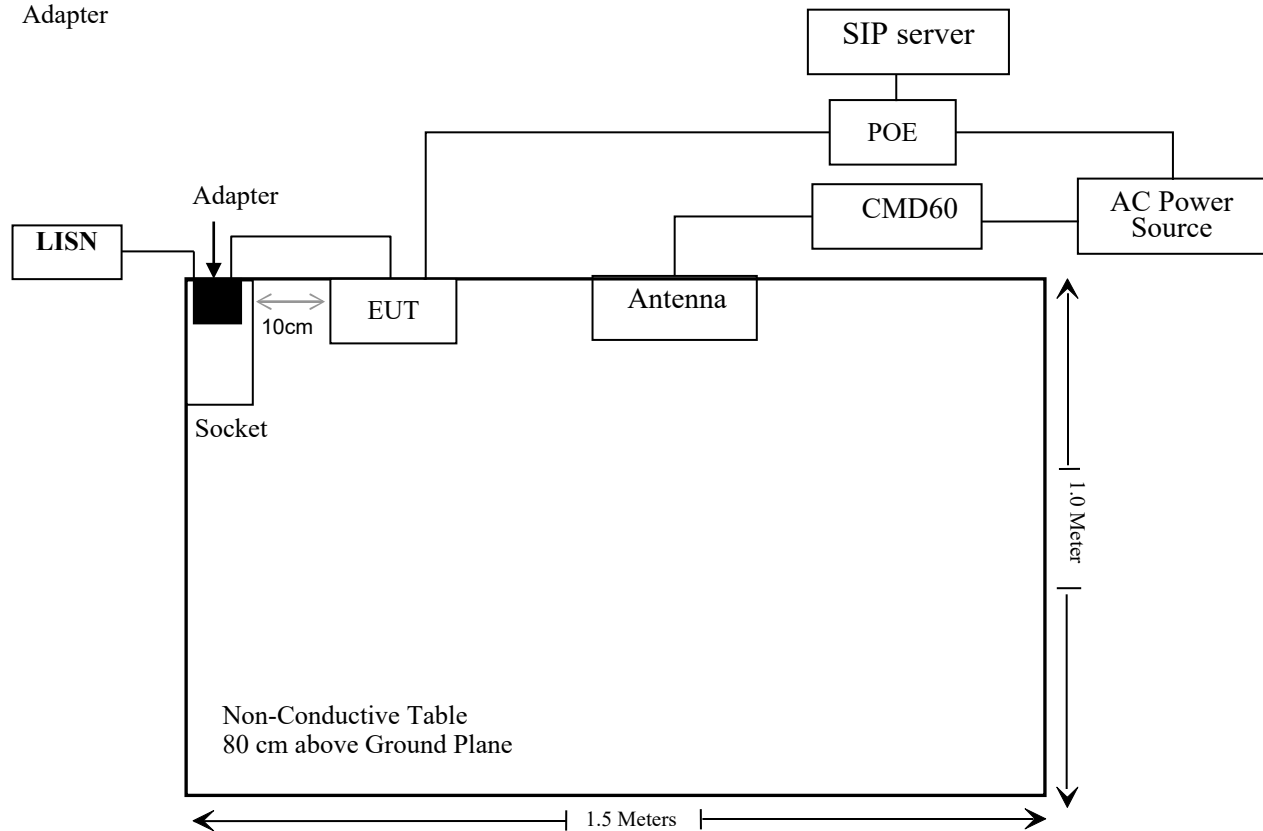


POE

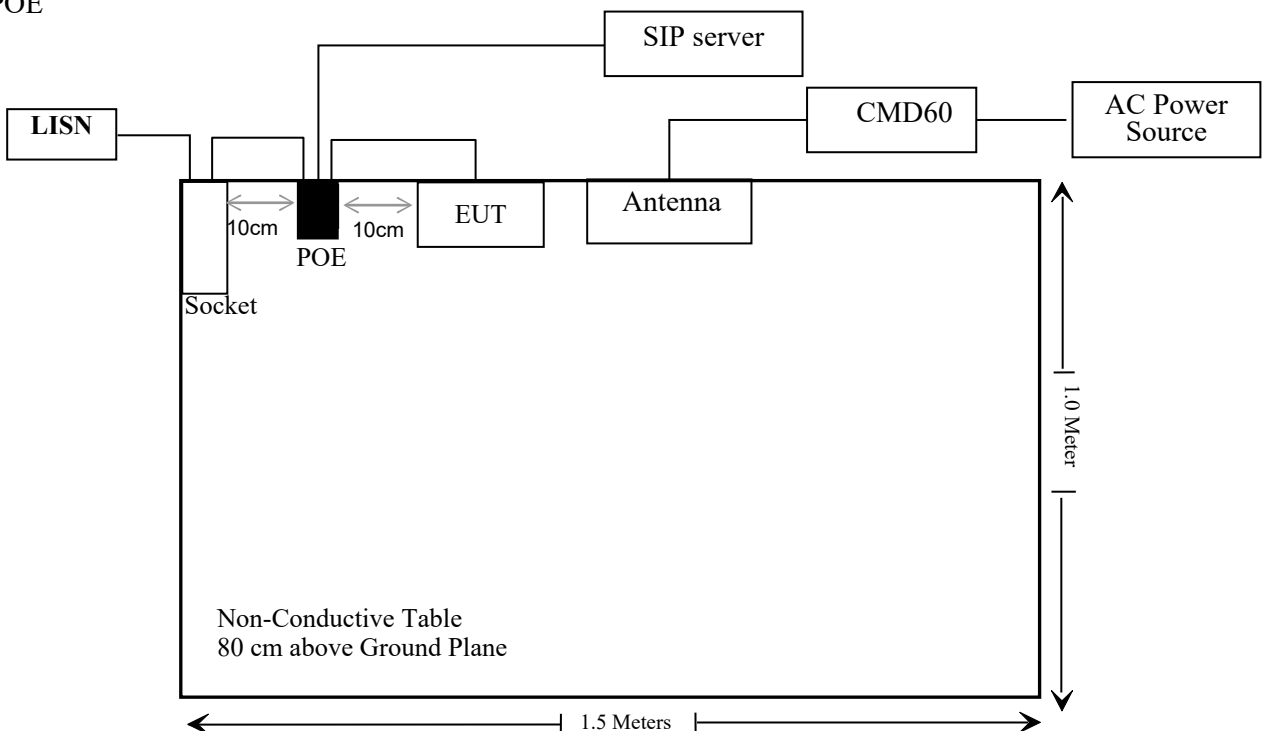


Radiated Emission:

Below 1GHz


Adapter

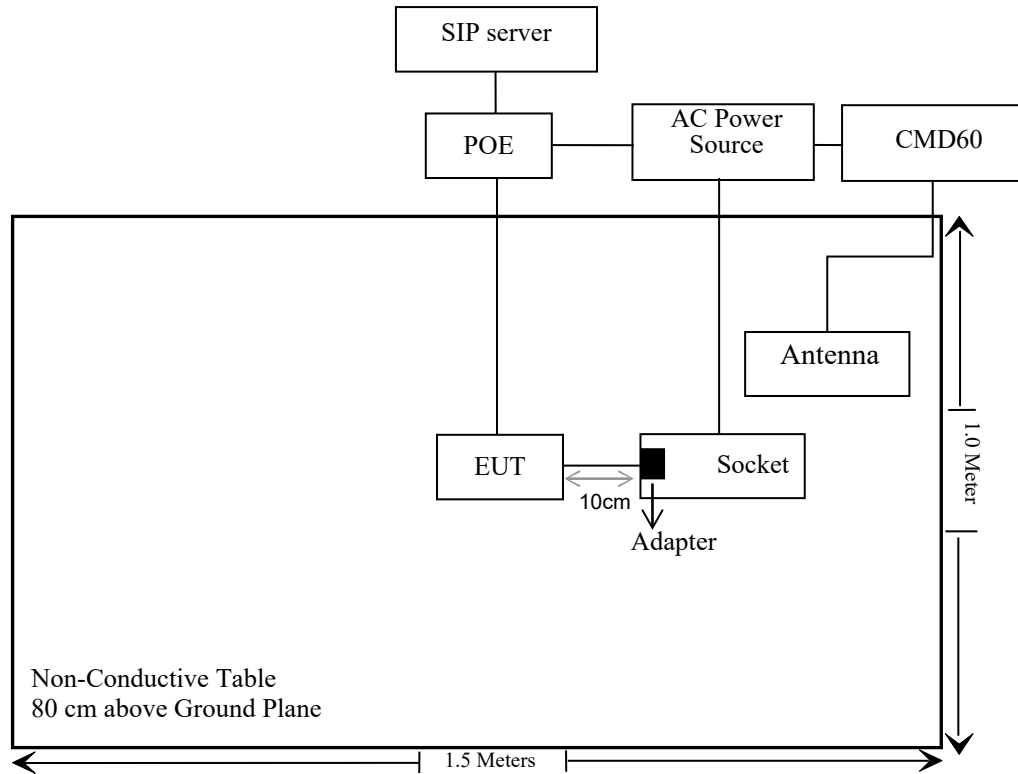

POE

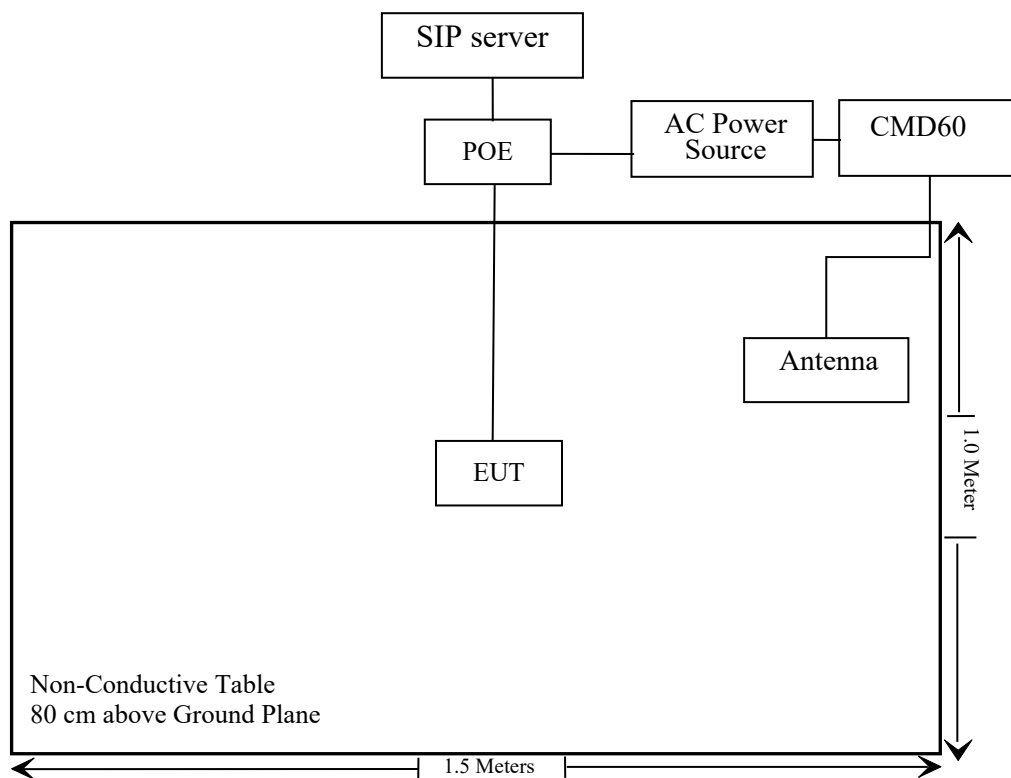

Above 1GHz

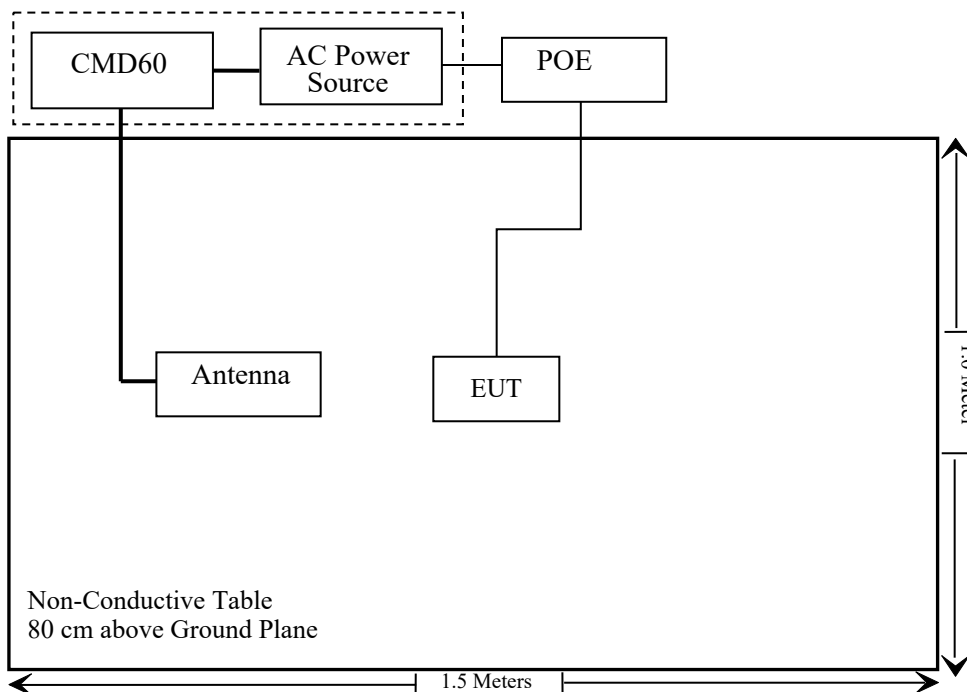

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§ 1.1310 & §2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field reference level exposure exemption limits	Compliant
§ 15.317, § 15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§ 15.315, § 15.207	RSS-213 §5.4	AC Line Conducted Emissions	Compliant
§ 15.323 (a)	RSS-213 §5.5	Emission Bandwidth	Compliant
§ 15.319 (c)	RSS-213 §5.6	Peak Transmit Power	Compliant
§ 15.319 (d)	RSS-213 §5.7	Power Spectral Density	Compliant
§ 15.323 (d)	RSS-213 §5.8	Emission Inside and Outside the sub-band	Compliant
§15.205, §15.209, § 15.319 (g)	RSS-213 §5.8	Radiated Emission	Compliant
§ 15.323 (f)	RSS-213 §5.3	Frequency Stability	Compliant
§ 15.323 (c)(e) § 15.319 (f)	RSS-213 §5.1&§5.2	Specific Requirements for UPCS	Compliant

Note: This device has two antennas, and they cannot work simultaneously. The antenna is randomly selected based on the signal strength. So the ANT1 which with the highest output power was selected to perform full test.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
BACL	High Low TEMP Test Chamber	BTH-150-40	30144	2025/09/11	2026/09/10
Rohde & Schwarz	Digital Radio Communication Tester	CMD60	830553/018	2025/09/18	2026/09/17
Keysight	MXG Vector Signal Generator	N5182B	MY53051503	2025/09/18	2026/09/17
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2025/04/29	2026/04/28
Unknown	RF Cable	Cable RF2	Cable RF2	2025/09/17	2026/09/16
Unknown	3dB Attenuator	Unknown	F-03-EM220	2025/06/26	2026/06/25
Unknown	10dB Attenuator	Unknown	F-03-EM224	2025/06/26	2026/06/25
HP	Power Splitter	11667A	1610A	2025/06/26	2026/06/25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1091 - RF EXPOSURE EVALUATION

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

Result

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	MPE-Based Exemption Threshold (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
DECT	1921.536-1928.448	19.0	2.3	0.15	19.15	82.22	0.2	768

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

RSS-102 § 6.6 - FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS

Applicable Standard

According to RSS-102 Issue 6§6.6:

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance) In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

Result

Calculated Data:

Mode	Frequency (MHz)	Maximum tune-up conducted power [#] (dBm)	Antenna Gain [#]	Maximum tune-up EIRP		Evaluation Distance (m)	Limit (mW)
			(dBi)	(dBm)	(mW)		
DECT	1921.536-1928.448	19.0	2.3	21.30	134.90	0.2	2298

Note: The tune up conducted power[#] and antenna gain[#] was declared by the applicant.

Result: Compliant

Note: To maintain compliance with the RF exposure guidelines, place the equipment at least 20cm from nearby persons.

FCC § 15.317, § 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8,

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two integral antenna arrangements which were permanently attached and both the gain[#] is 0.6dBi for ANT1 and 2.3dBi for ANT2, fulfill the requirement of this section. Please refer to the EUT photos.


Antenna	Type	Antenna Gain [#]	Impedance
Antenna 1	PCB	0.6dBi	50Ω
Antenna 2	PCB	2.3dBi	50Ω

FCC § 15.315, § 15.207 & RSS-213 §5.4 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.315, §15.207(a), RSS-213 §5.4, RSS-GEN § 8.8.

EUT Setup

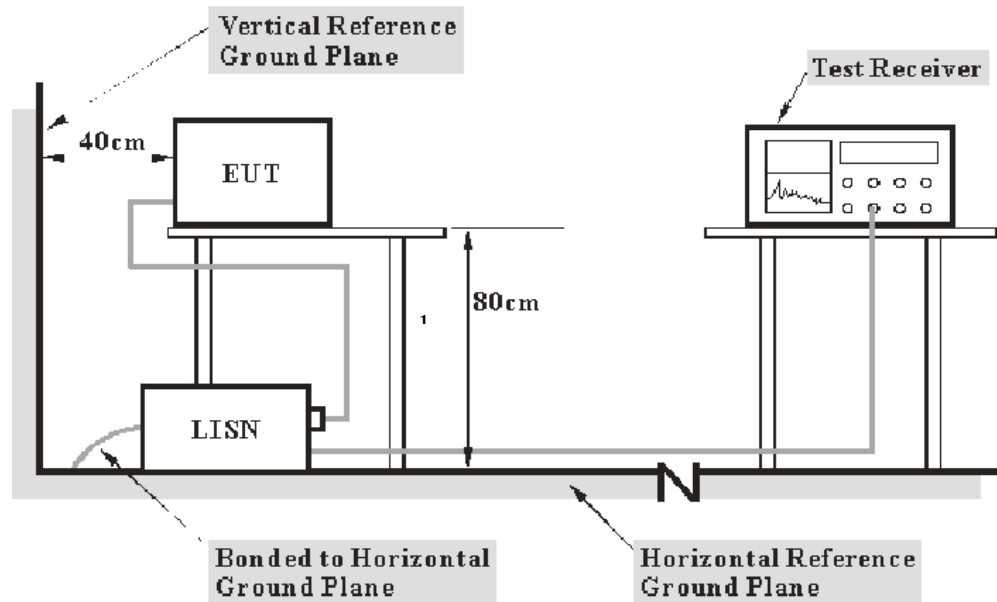

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Test Data

Environmental Conditions

Temperature:	23.6 °C
Relative Humidity:	49 %
ATM Pressure:	101.9 kPa

The testing was performed by Macy Shi on 2026-02-03.

EUT operation mode: Transmitting (Maximum output power mode: ANT1 GFSK High Channel)

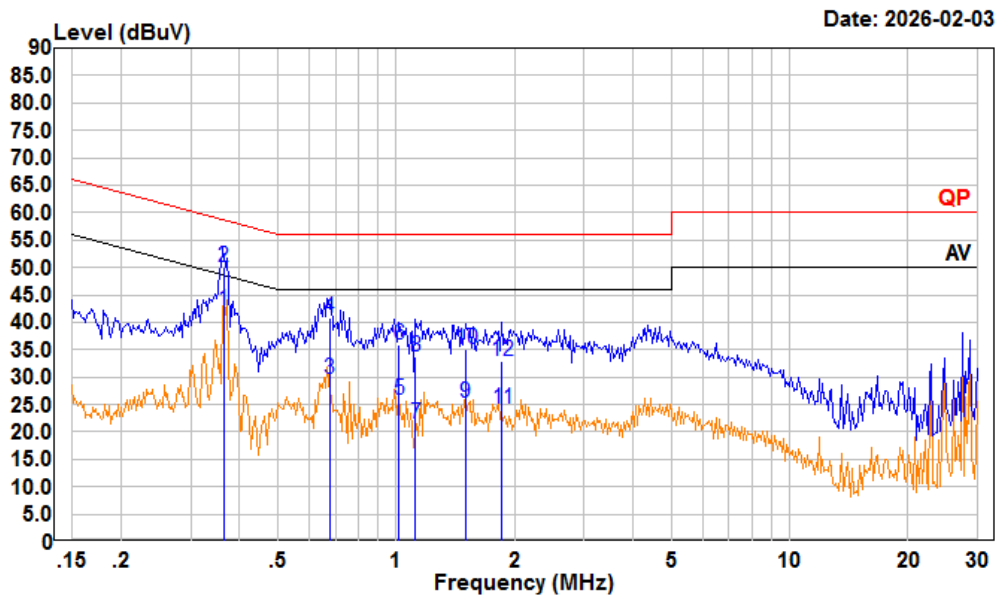Adapter:**AC 120V/60 Hz, Line**

Condition: Line


Project : 2501A92967E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.365	22.44	42.17	9.70	10.03	48.62	-6.45	Average
2	0.365	30.19	49.92	9.70	10.03	58.62	-8.70	QP
3	0.676	9.91	29.65	9.70	10.04	46.00	-16.35	Average
4	0.676	21.17	40.91	9.70	10.04	56.00	-15.09	QP
5	1.014	5.61	25.73	9.90	10.22	46.00	-20.27	Average
6	1.014	15.68	35.80	9.90	10.22	56.00	-20.20	QP
7	1.118	1.40	21.52	9.90	10.22	46.00	-24.48	Average
8	1.118	13.59	33.71	9.90	10.22	56.00	-22.29	QP
9	1.499	5.20	25.31	9.90	10.21	46.00	-20.69	Average
10	1.499	14.93	35.04	9.90	10.21	56.00	-20.96	QP
11	1.855	4.09	24.19	9.90	10.20	46.00	-21.81	Average
12	1.855	12.74	32.84	9.90	10.20	56.00	-23.16	QP

AC 120V/60 Hz, Neutral

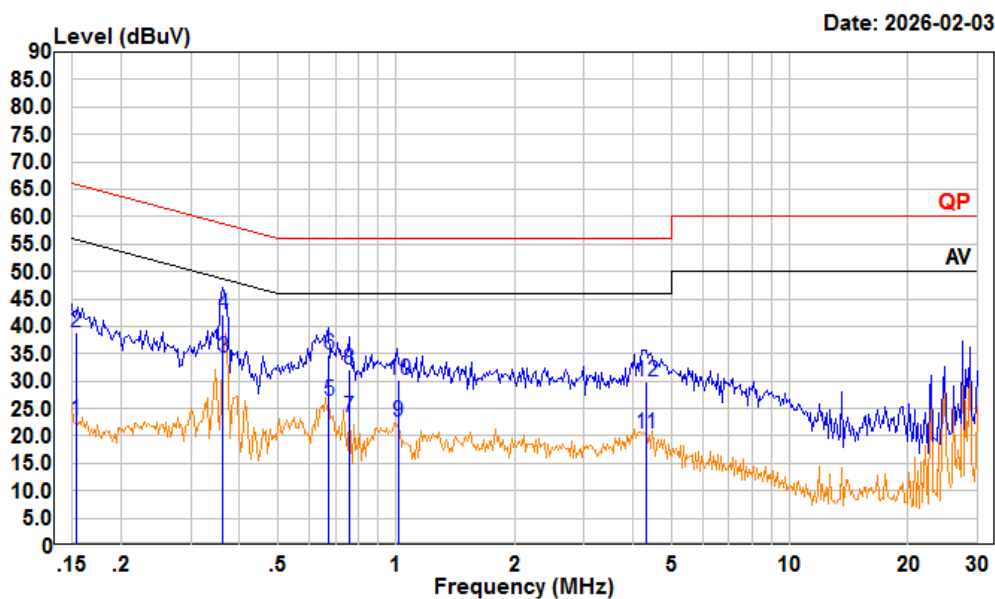

Condition: neutral

Project : 2501A92967E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.153	3.23	22.85	9.60	10.02	55.81	-32.96	Average
2	0.153	19.17	38.79	9.60	10.02	65.81	-27.02	QP
3	0.363	14.64	34.27	9.60	10.03	48.65	-14.38	Average
4	0.363	22.54	42.17	9.60	10.03	58.65	-16.48	QP
5	0.673	6.63	26.27	9.60	10.04	46.00	-19.73	Average
6	0.673	15.20	34.84	9.60	10.04	56.00	-21.16	QP
7	0.759	3.68	23.32	9.60	10.04	46.00	-22.68	Average
8	0.759	12.45	32.09	9.60	10.04	56.00	-23.91	QP
9	1.011	2.83	22.65	9.60	10.22	46.00	-23.35	Average
10	1.011	10.42	30.24	9.60	10.22	56.00	-25.76	QP
11	4.317	0.55	20.38	9.61	10.22	46.00	-25.62	Average
12	4.317	10.18	30.01	9.61	10.22	56.00	-25.99	QP

POE:

AC 120V/60 Hz, Line

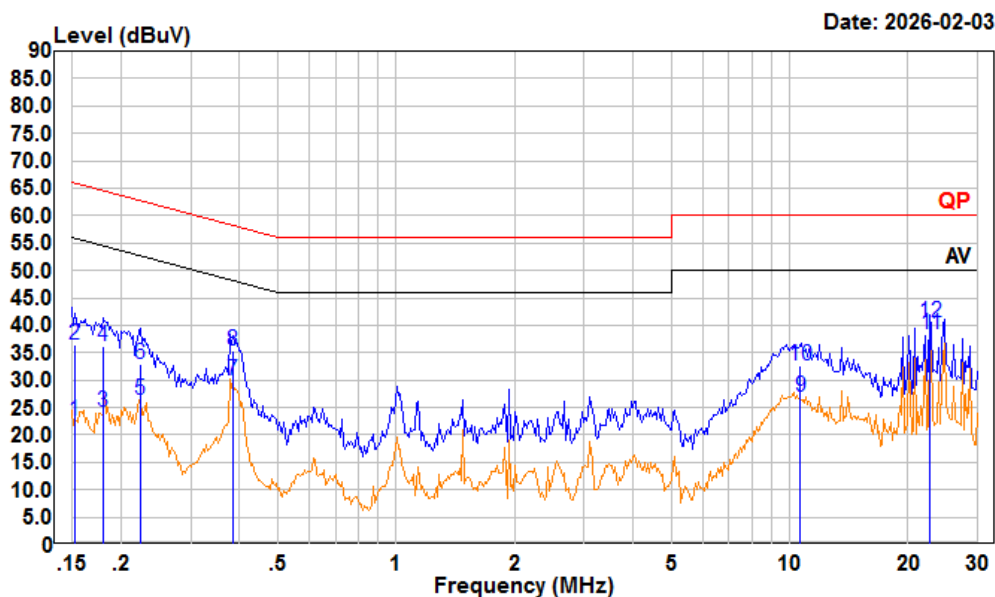

Condition: Line


Project : 2501A92967E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	2.89	22.61	9.70	10.02	55.89	-33.28	Average
2	0.152	16.71	36.43	9.70	10.02	65.89	-29.46	QP
3	0.179	4.54	24.27	9.70	10.03	54.51	-30.24	Average
4	0.179	16.37	36.10	9.70	10.03	64.51	-28.41	QP
5	0.223	6.71	26.45	9.71	10.03	52.70	-26.25	Average
6	0.223	13.21	32.95	9.71	10.03	62.70	-29.75	QP
7	0.383	10.17	29.97	9.77	10.03	48.21	-18.24	Average
8	0.383	15.60	35.40	9.77	10.03	58.21	-22.81	QP
9	10.645	6.62	26.86	9.90	10.34	50.00	-23.14	Average
10	10.645	12.43	32.67	9.90	10.34	60.00	-27.33	QP
11	22.711	17.86	38.22	9.90	10.46	50.00	-11.78	Average
12	22.711	20.15	40.51	9.90	10.46	60.00	-19.49	QP

AC 120V/60 Hz, Neutral

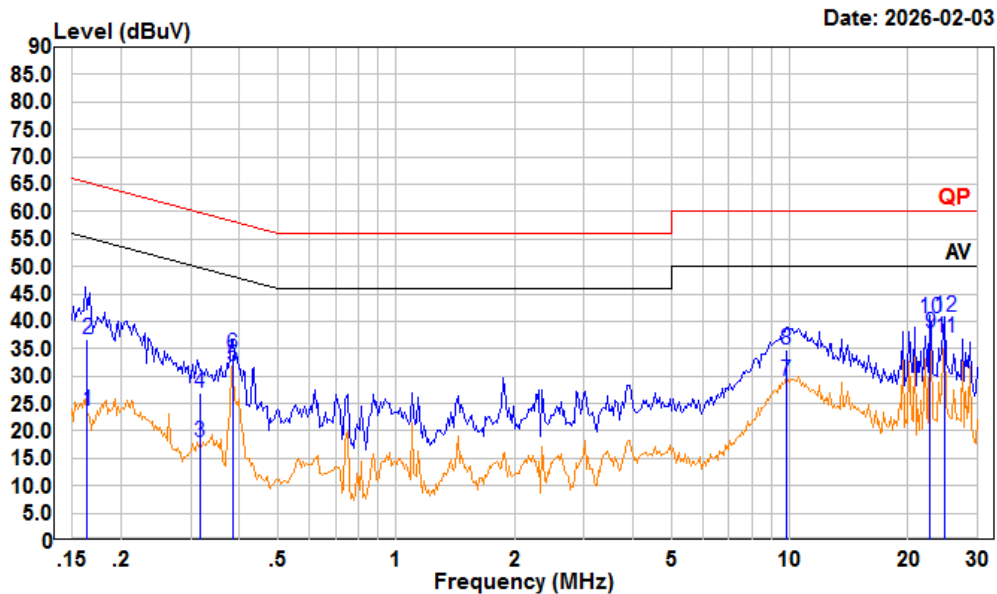

Condition: neutral

Project : 2501A92967E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	4.18	23.80	9.60	10.02	55.29	-31.49	Average
2	0.163	17.08	36.70	9.60	10.02	65.29	-28.59	QP
3	0.317	-1.74	17.89	9.60	10.03	49.78	-31.89	Average
4	0.317	7.25	26.88	9.60	10.03	59.78	-32.90	QP
5	0.384	12.16	31.79	9.60	10.03	48.19	-16.40	Average
6	0.384	14.34	33.97	9.60	10.03	58.19	-24.22	QP
7	9.789	9.10	29.13	9.70	10.33	50.00	-20.87	Average
8	9.789	14.80	34.83	9.70	10.33	60.00	-25.17	QP
9	22.711	17.55	37.71	9.70	10.46	50.00	-12.29	Average
10	22.711	20.30	40.46	9.70	10.46	60.00	-19.54	QP
11	24.837	16.75	36.93	9.70	10.48	50.00	-13.07	Average
12	24.837	20.60	40.78	9.70	10.48	60.00	-19.22	QP

FCC § 15.323 (A) & RSS-213 §5.5 EMISSION BANDWIDTH

Applicable Standard

According to FCC §15.323(a):


Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

According to RSS-213§ 5.5:

The emission bandwidth shall not be less than 50 kHz nor more than 2.5 MHz.

The emission bandwidth is measured in accordance with ANSI C63.17 sub-clause 6.1.3 using the setup below:

Test Setup 1:

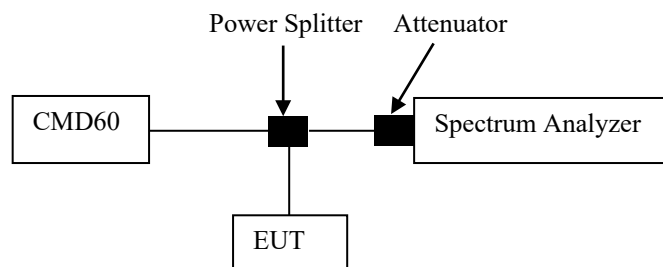

Note: Offset (10.5dB) = Attenuator (3dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 10.5dB

The width, in Hz, of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that is 26 dB down relative to the maximum level of the modulated carrier. It is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% of the emission band-width of the device under measurement. [Extraction from 47 CFR 15, subpart D, 15.303 (C)].

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

Resolution bandwidth	1.0% of the emission bandwidth (as close as possible)
Video bandwidth	>3 times the resolution bandwidth
Number of sweeps	sufficient to stability the trace
Detection mode	peak detection with maximum hold

EBW:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

OBW:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

Test Data**Environmental Conditions**

Temperature:	25.5 °C
Relative Humidity:	45~46 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2026-01-31.

Test mode: Transmitting


Test Result: Compliant

Mode	Channel	Center Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)	Limit
GFSK	Low	1921.536	1.185	1.418	50 kHz ~ 2.5 MHz
	Middle	1924.992	1.185	1.405	50 kHz ~ 2.5 MHz
	High	1928.448	1.188	1.406	50 kHz ~ 2.5 MHz
$\pi/2$ -DBPSK	Low	1921.536	1.443	1.694	50 kHz ~ 2.5 MHz
	Middle	1924.992	1.443	1.693	50 kHz ~ 2.5 MHz
	High	1928.448	1.440	1.694	50 kHz ~ 2.5 MHz
$\pi/4$ -DQPSK	Low	1921.536	1.419	1.715	50 kHz ~ 2.5 MHz
	Middle	1924.992	1.419	1.720	50 kHz ~ 2.5 MHz
	High	1928.448	1.419	1.715	50 kHz ~ 2.5 MHz
$\pi/8$ -D8PSK	Low	1921.536	1.428	1.697	50 kHz ~ 2.5 MHz
	Middle	1924.992	1.428	1.696	50 kHz ~ 2.5 MHz
	High	1928.448	1.428	1.691	50 kHz ~ 2.5 MHz

GFSK:


99% Emission Bandwidth:

Low Channel

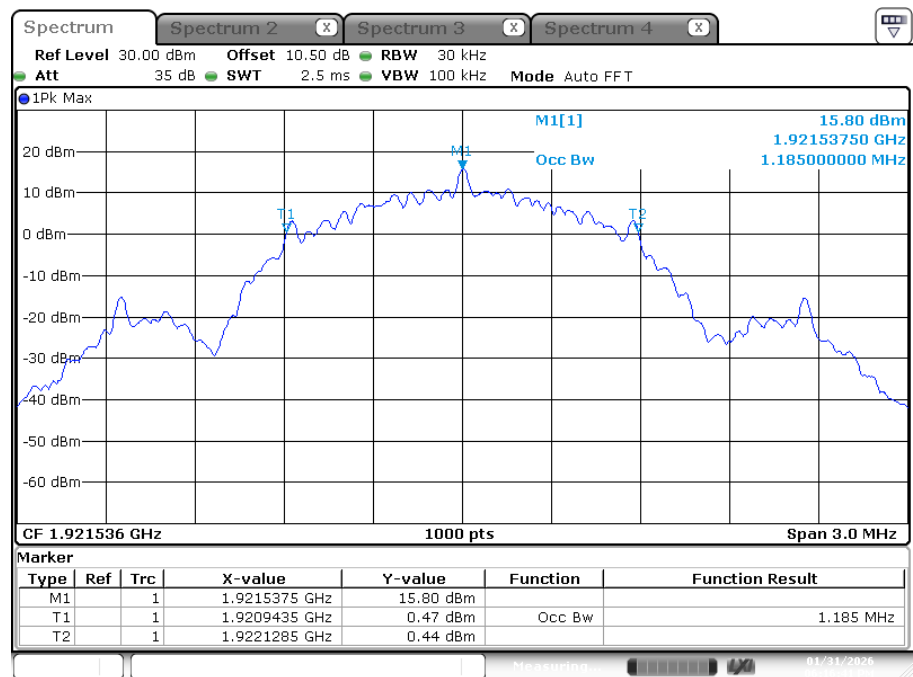


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:16:41

Middle Channel

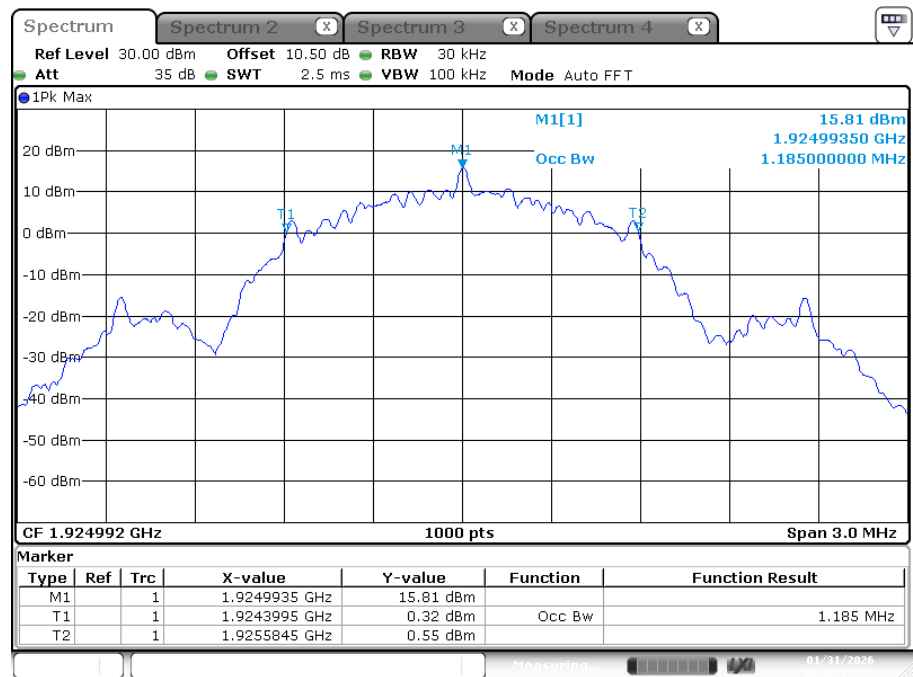

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:09:02


High Channel

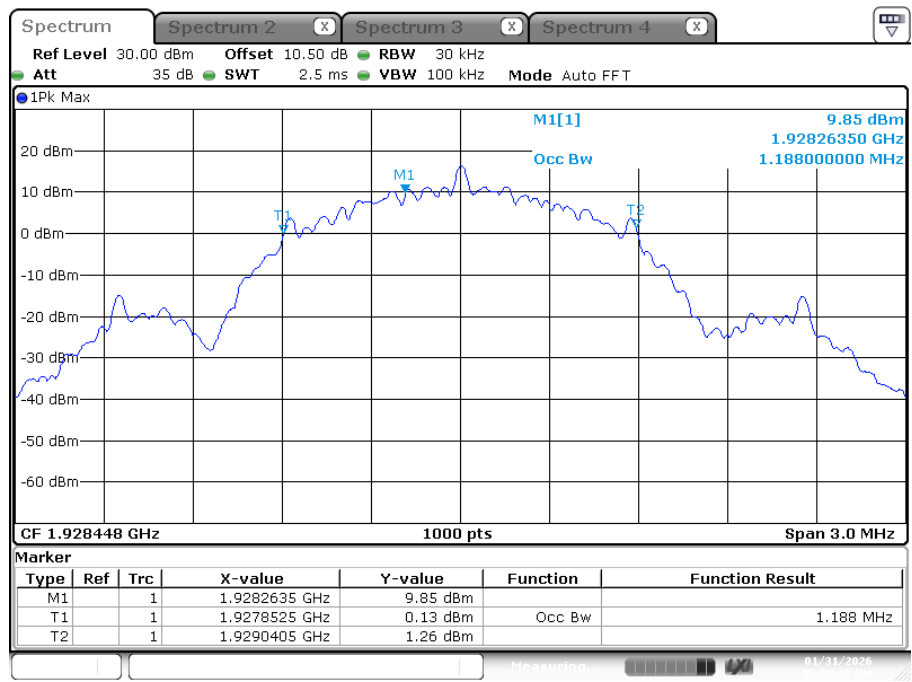

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:58:26

26 dB Emission Bandwidth


Low Channel

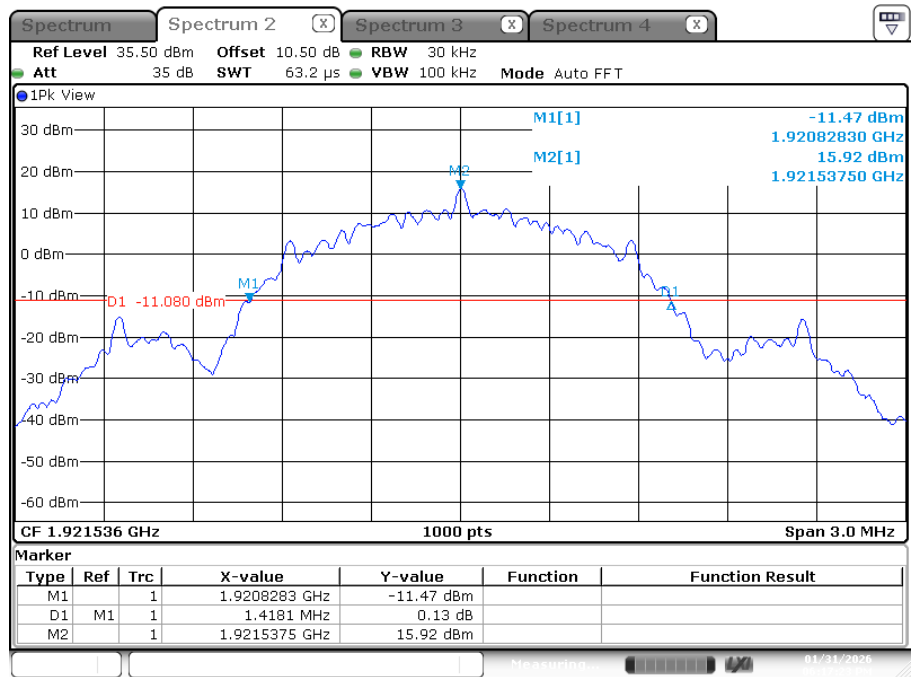

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:17:23


Middle Channel

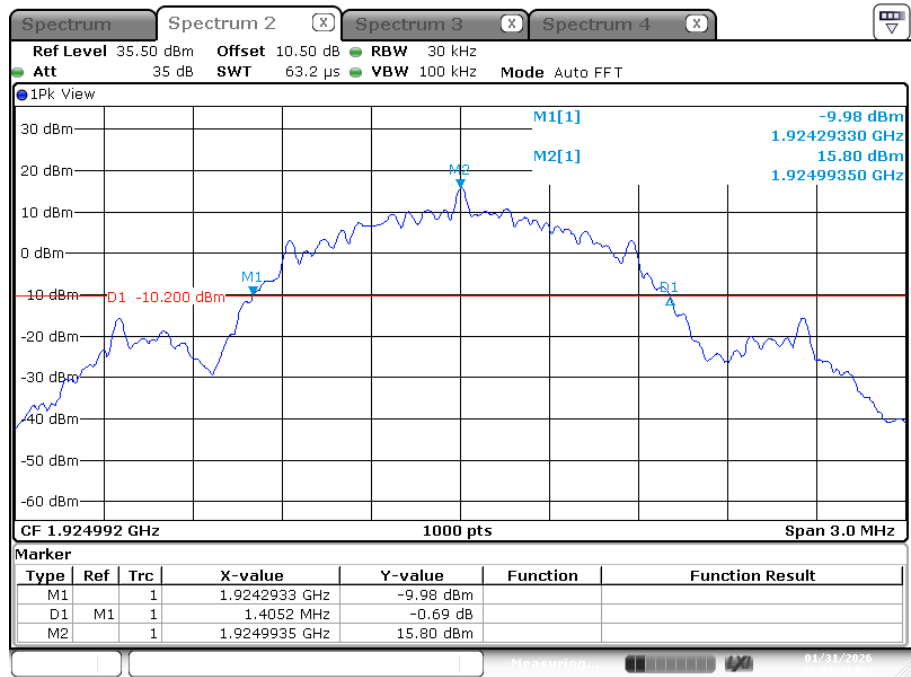

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:09:42

High Channel

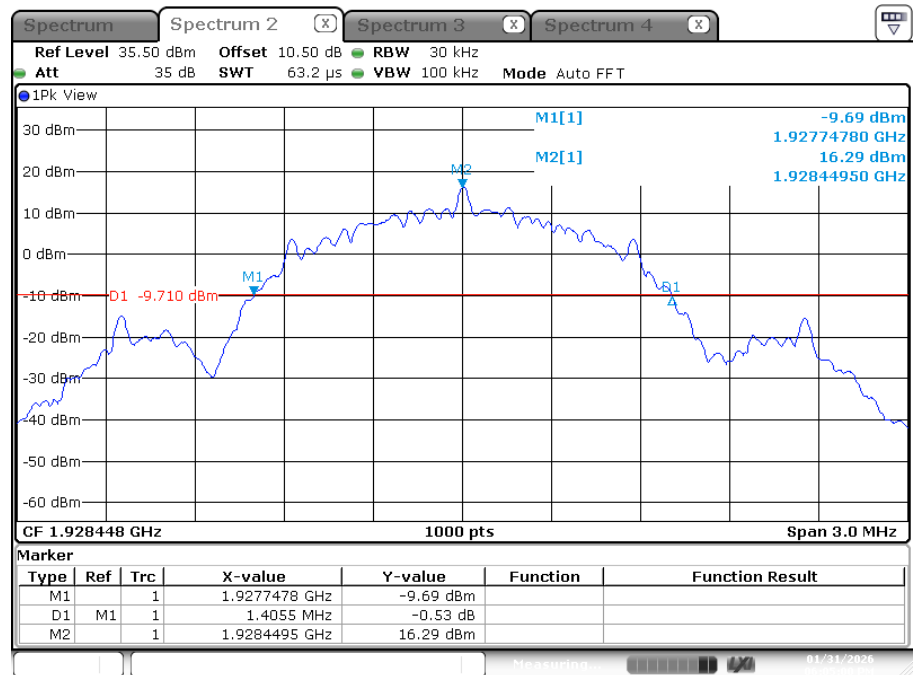


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:05:00

$\pi/2$ -DBPSK:


99% Emission Bandwidth

Low Channel

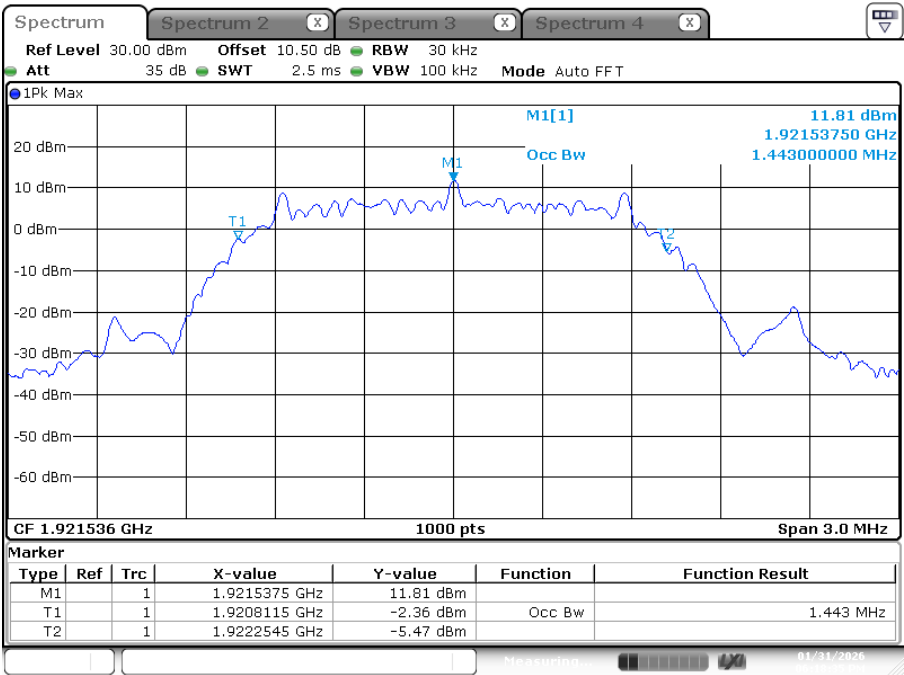


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:18:35

Middle Channel

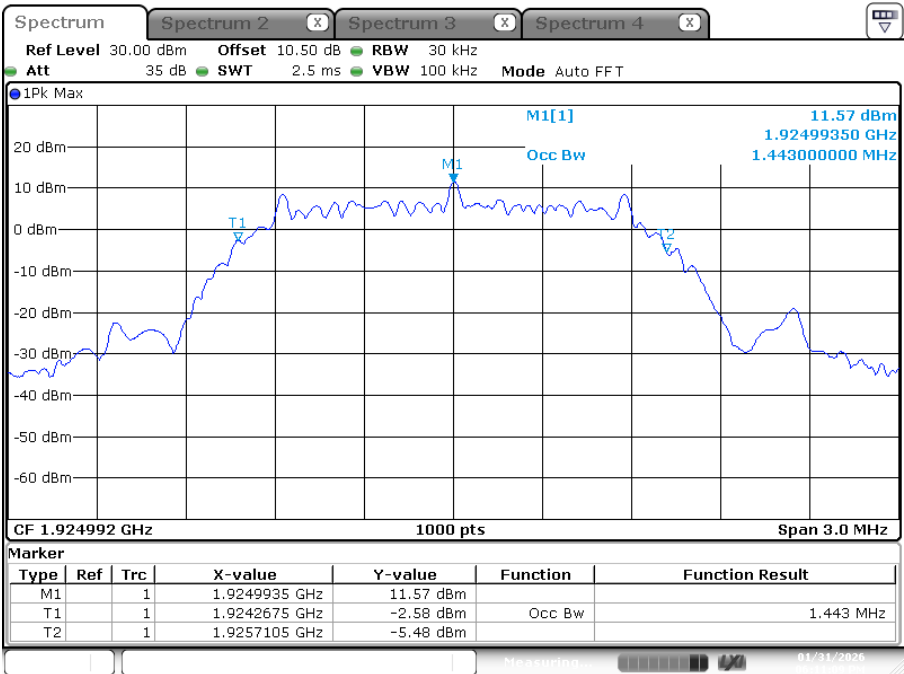

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:11:09


High Channel

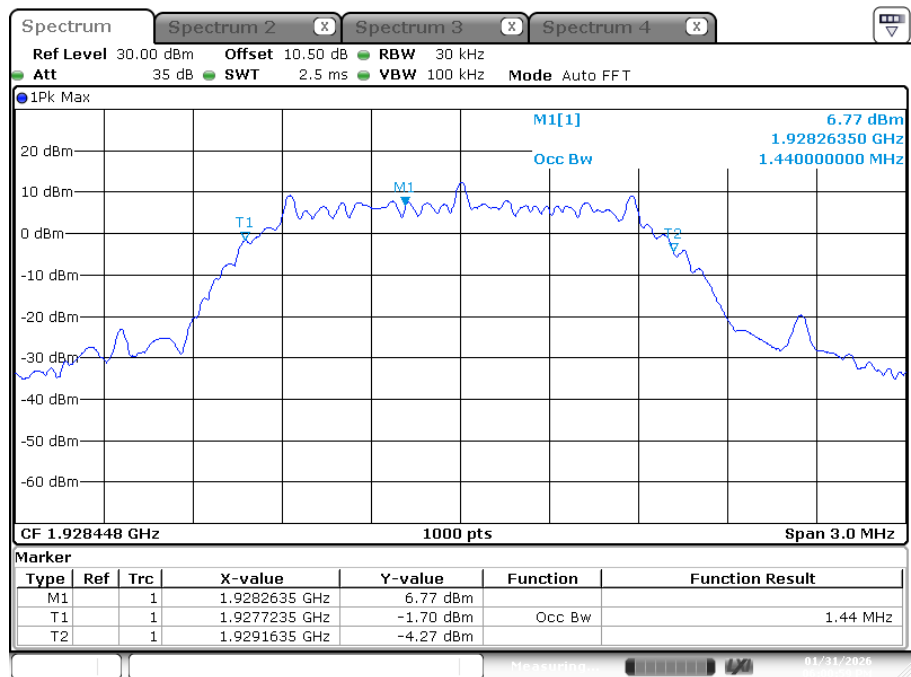

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:00:58

26 dB Emission Bandwidth


Low Channel

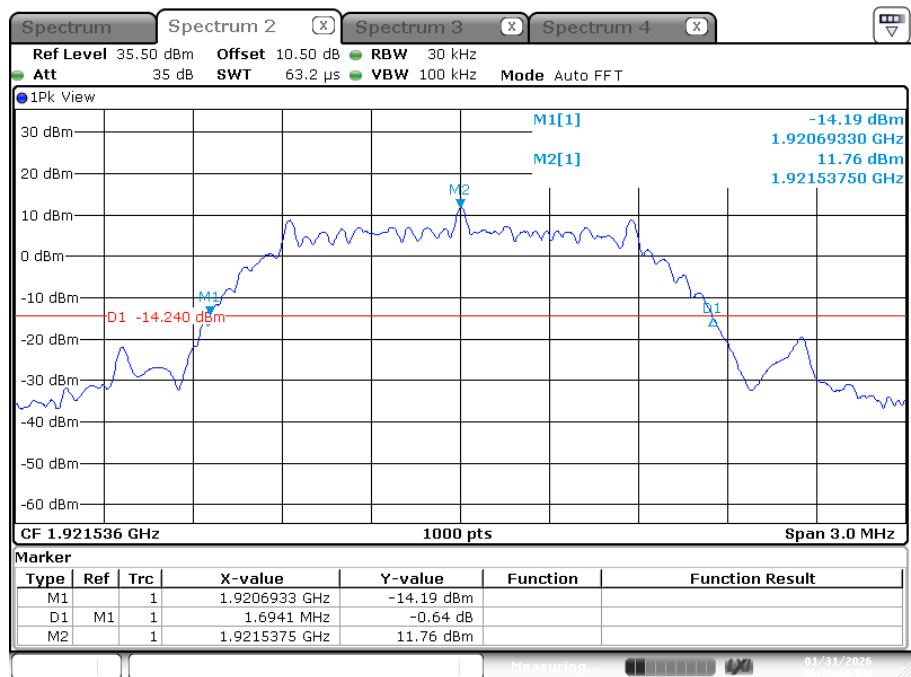

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:19:06


Middle Channel

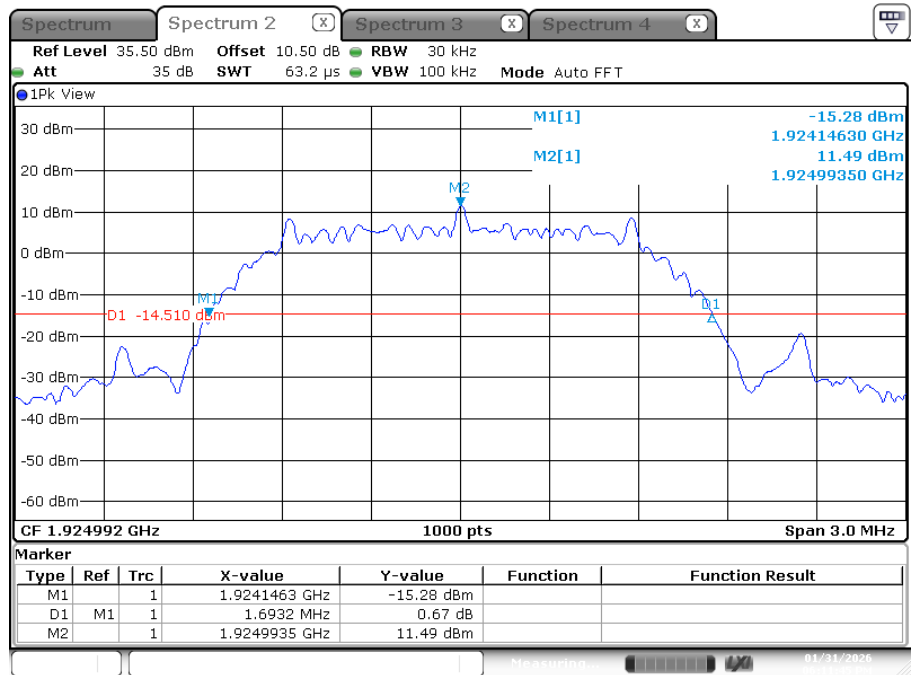

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:11:45

High Channel

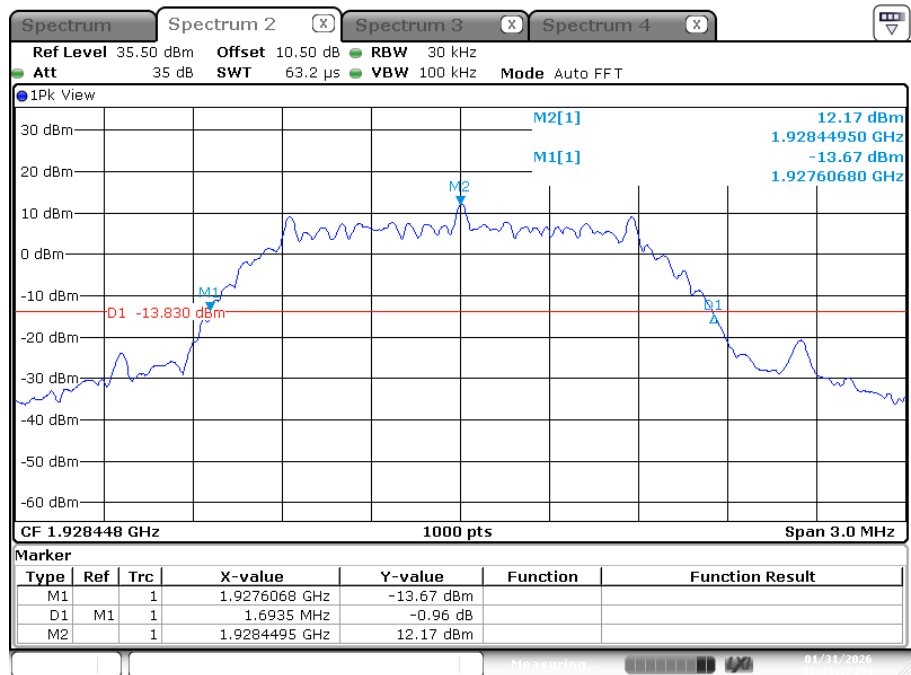


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:03:12

$\pi/4$ -DQPSK:


99% Emission Bandwidth

Low Channel

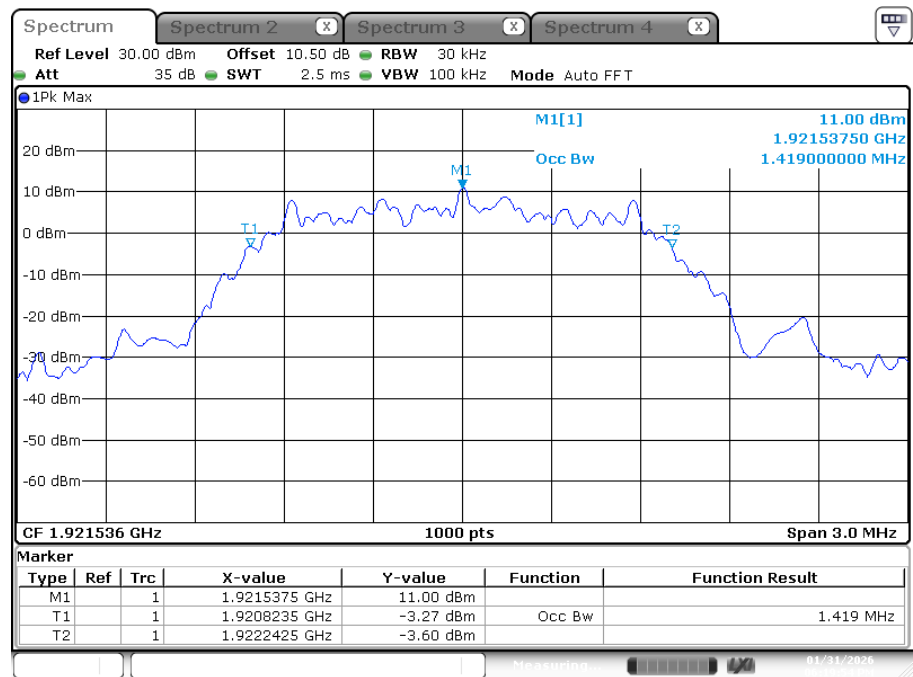


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:19:54

Middle Channel

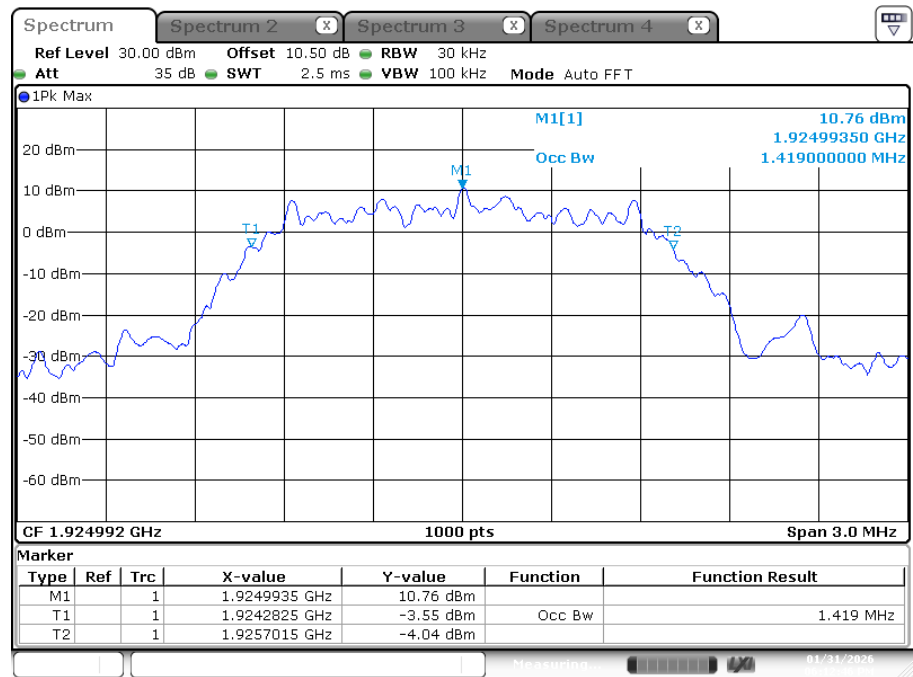

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:12:46


High Channel

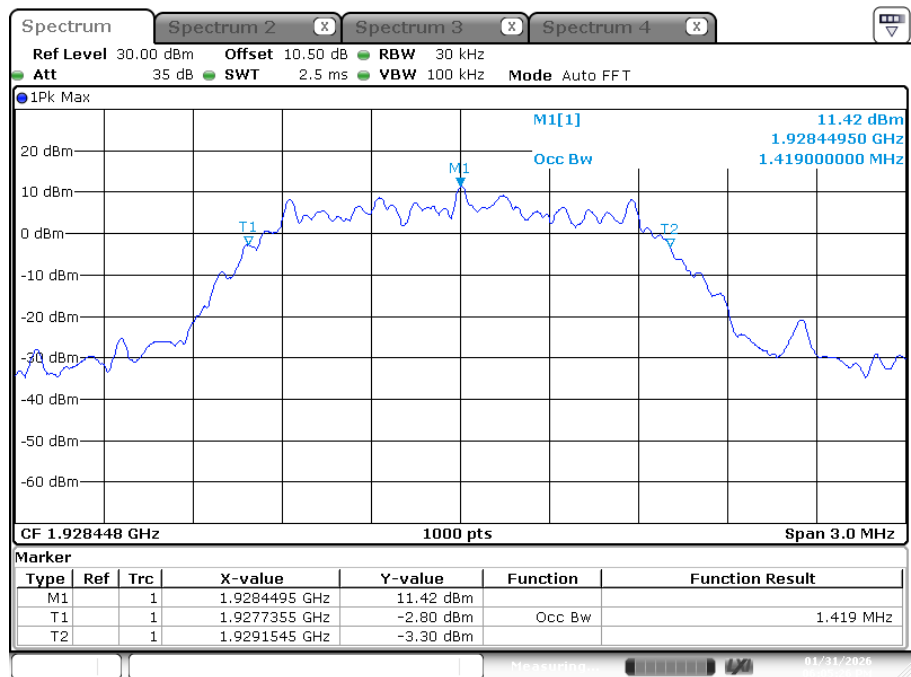

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:05:26

26 dB Emission Bandwidth


Low Channel

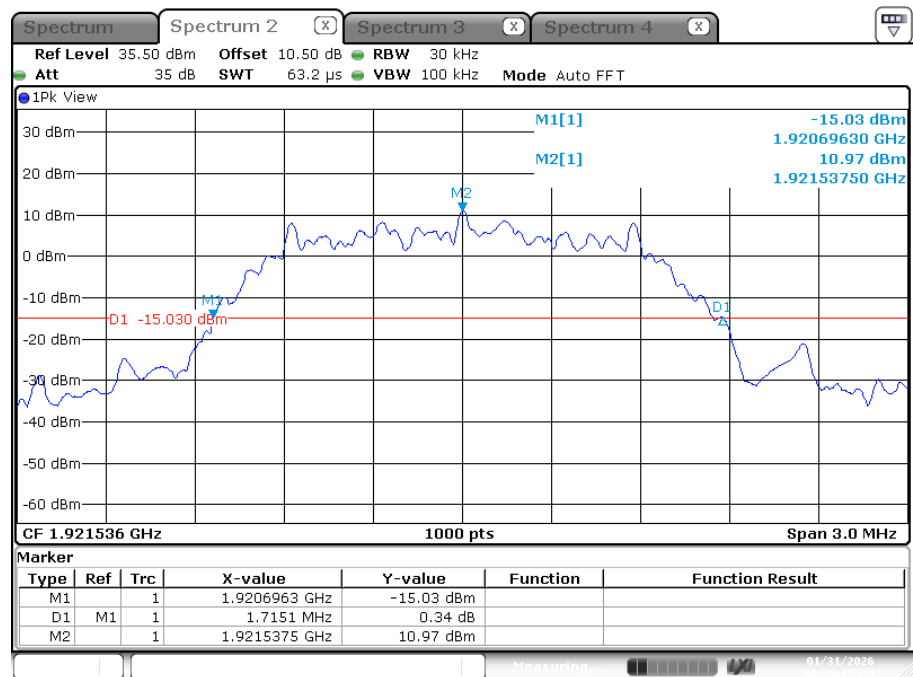

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:20:19


Middle Channel

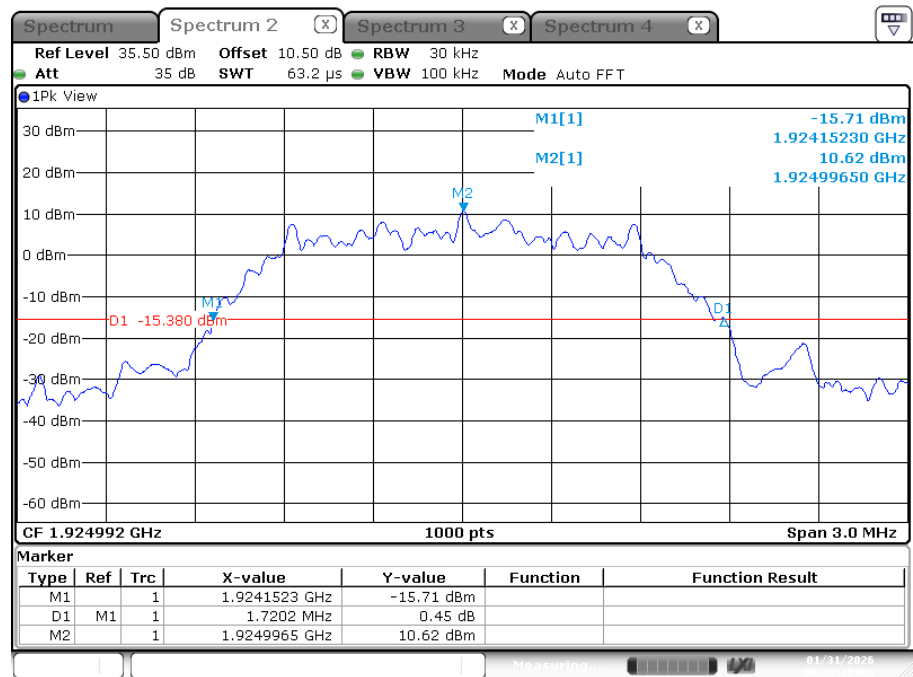

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:13:19

High Channel

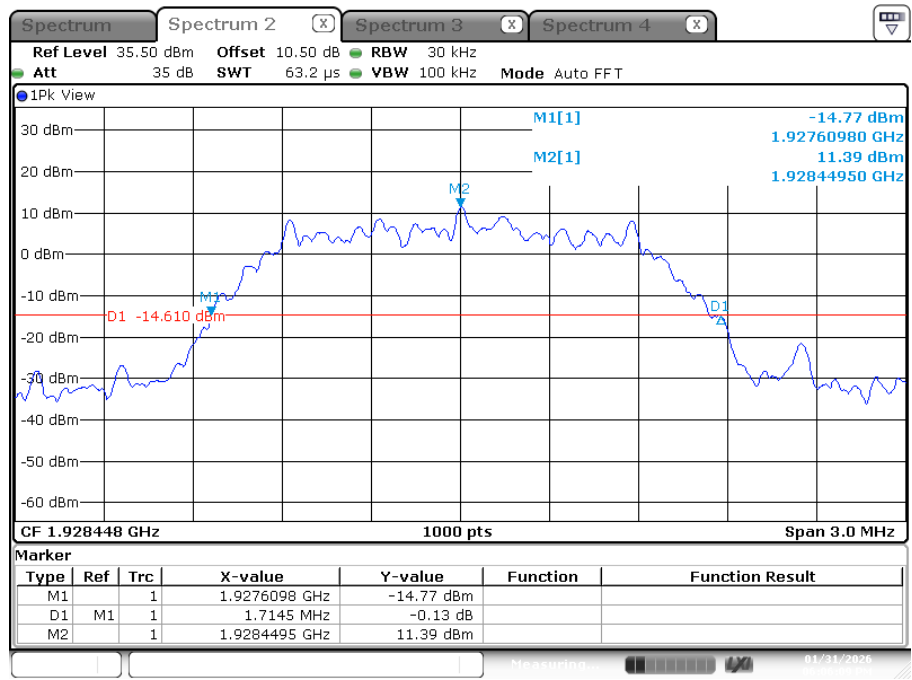


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:06:09

$\pi/8$ -D8PSK:


99% Emission Bandwidth

Low Channel

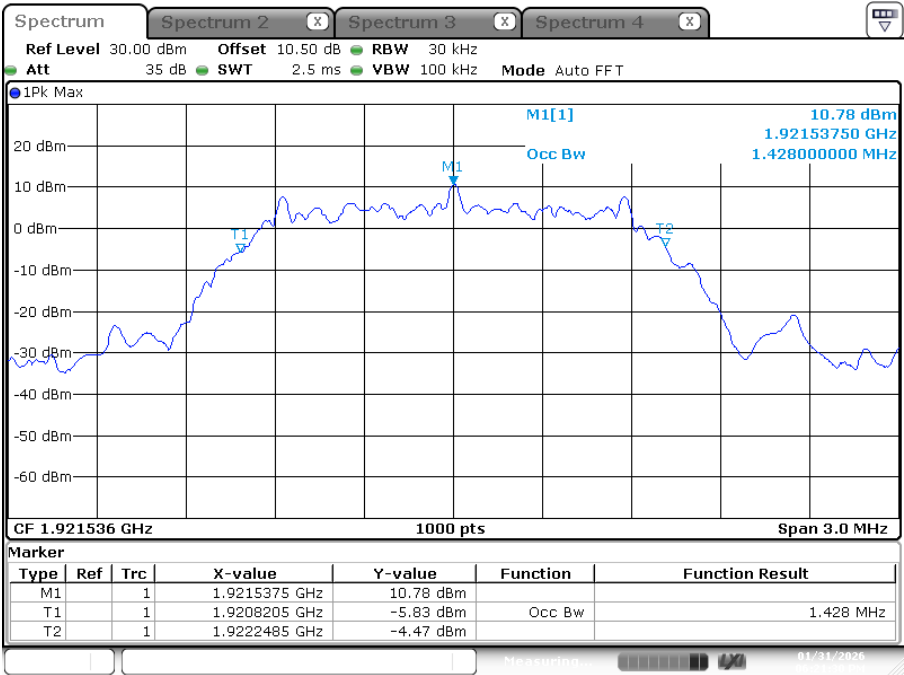


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:21:30

Middle Channel

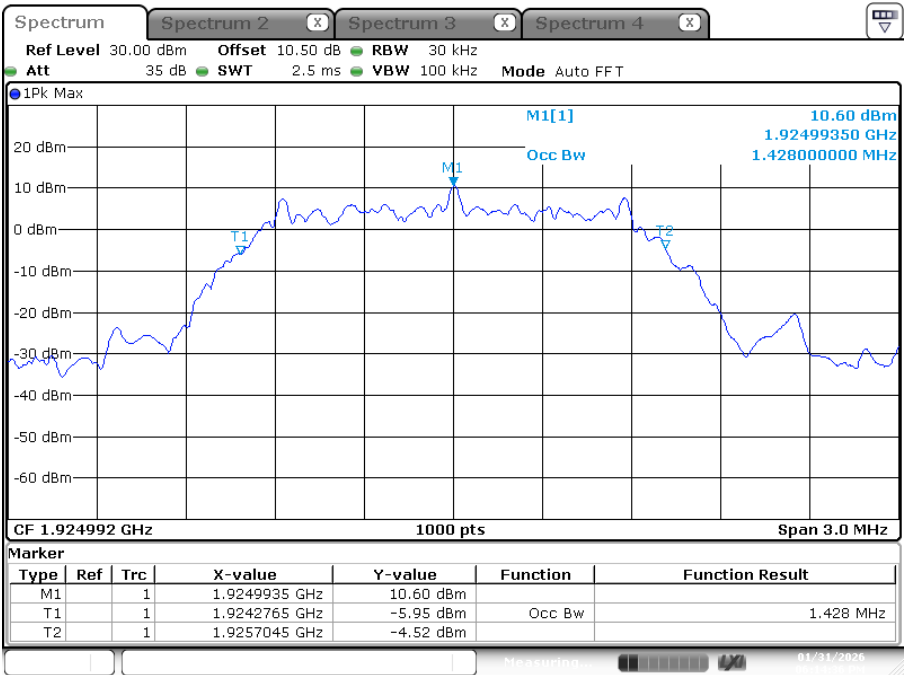

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:14:36


High Channel

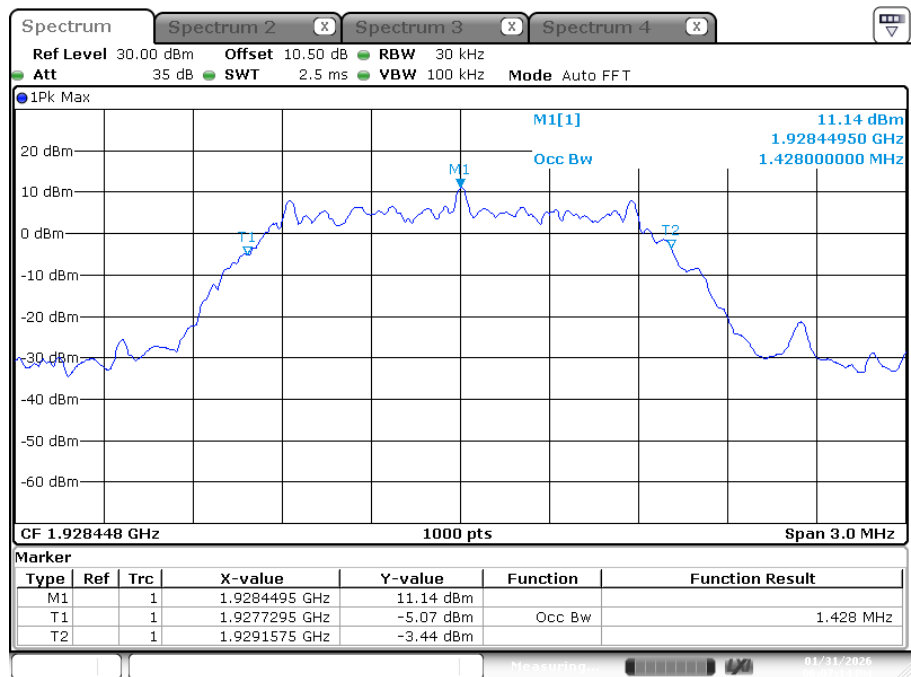

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:07:14

26 dB Emission Bandwidth


Low Channel

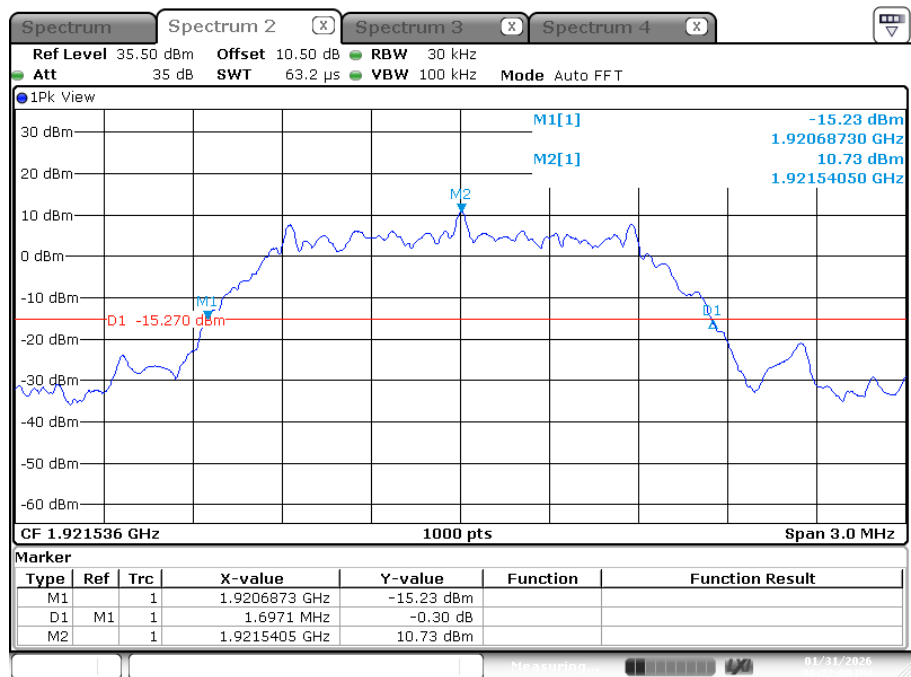

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:21:59


Middle Channel

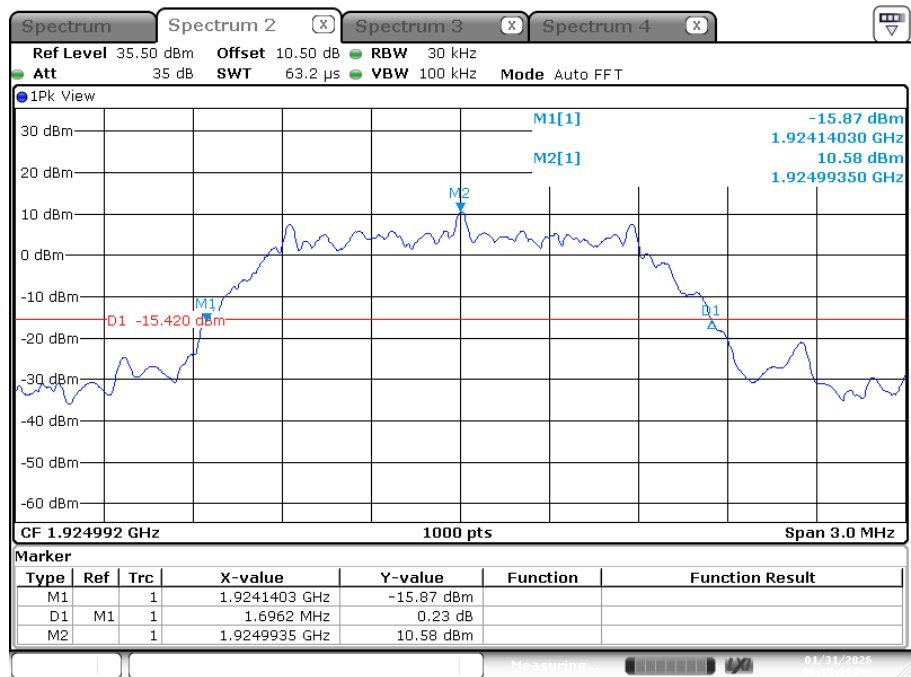

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:15:07

High Channel

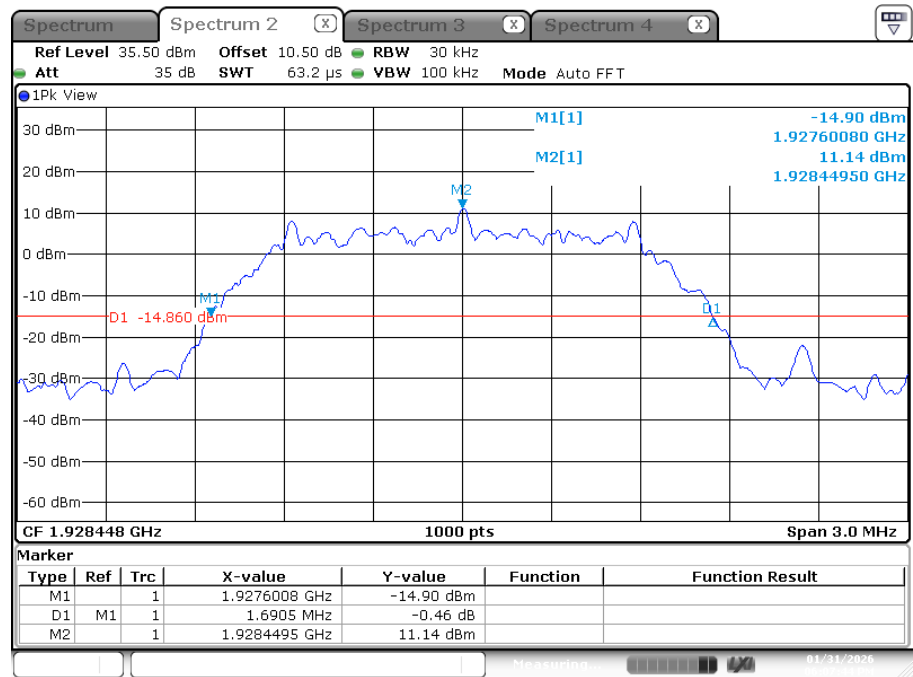

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:07:44

FCC § 15.319 (c) & RSS-213 §5.6 PEAK TRANSMIT POWER

Applicable Standard

The peak power output as measured over an interval of time equal to the frame rate or transmission burst of the device under all conditions of modulation. Usually this parameter is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used[47 CFR 15, subpart D, 15.303].

The peak transmit power is according to ANSI C63.17-2013 §6.1.2

Per FCC Part15.319 (c) Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

Per FCC Part15.319 (e), the peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Calculation of Peak Transmit Power Limit:

$$\text{Peak Transmit Power Limit} = 100\mu\text{W} \times (\text{EBW})^{1/2}$$


EBW is the transmit emission bandwidth in Hz determined in the other test item:

Per RSS-213 §5.6, Peak transmit power shall not exceed 100 μW multiplied by the square root of the occupied bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	$\geq$ Emission bandwidth
Video bandwidth	$\geq$ RBW
Span	Zero
Center frequency	Nominal center frequency of channels
Amplitude scale	Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy)
Detection	Peak detection
Trigger	Video
Sweep rate	Sufficiently rapid to permit the transmit pulse to be resolved accurately

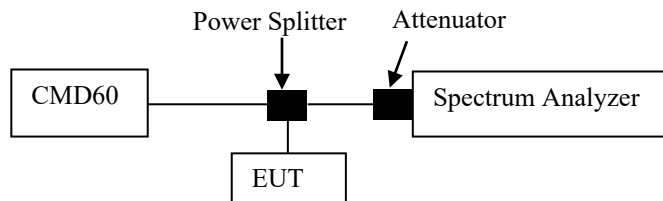

Note: Offset (10.5dB) = Attenuator (3dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 10.5dB

Test Data**Environmental Conditions**

Temperature:	25.5~25.6 °C
Relative Humidity:	45~49 %
ATM Pressure:	100.7~101 kPa

The testing was performed by Cheeb Huang on 2026-01-31.

Test mode: Transmitting:


Test Result: Compliant

Please refer to the following table and plots.


Channel	Frequency (MHz)	Peak Transmit Power (dBm)		FCC Limit (dBm)	ISED Limit (dBm)
		ANT 1	ANT 2		
GFSK					
Low	1921.536	18.49	18.36	20.76	20.37
Middle	1924.992	18.37	18.27	20.74	20.37
High	1928.448	18.94	18.91	20.74	20.37
$\pi/2$ -DBPSK					
Low	1921.536	18.14	18.00	21.14	20.8
Middle	1924.992	18.03	17.93	21.14	20.8
High	1928.448	18.58	18.55	21.14	20.79
$\pi/4$ -DQPSK					
Low	1921.536	17.96	17.84	21.17	20.76
Middle	1924.992	17.87	17.76	21.18	20.76
High	1928.448	18.40	18.38	21.17	20.76
$\pi/8$ -D8PSK					
Low	1921.536	17.78	17.63	21.15	20.77
Middle	1924.992	17.66	17.55	21.15	20.77
High	1928.448	18.24	18.22	21.14	20.77
Note: For FCC: Peak Transmit Power Limit = $100(\text{EBW})^{1/2} \mu\text{W}$ For ISEDC: Peak Transmit Power Limit = $100(\text{OBW})^{1/2} \mu\text{W}$					

GFSK:
ANT1


Low Channel

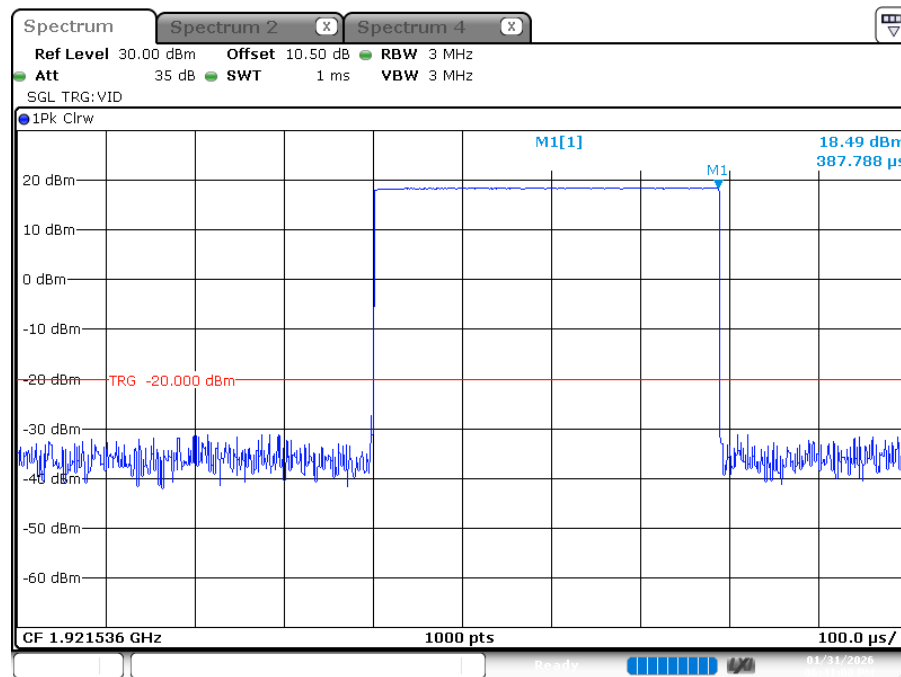

Middle Channel

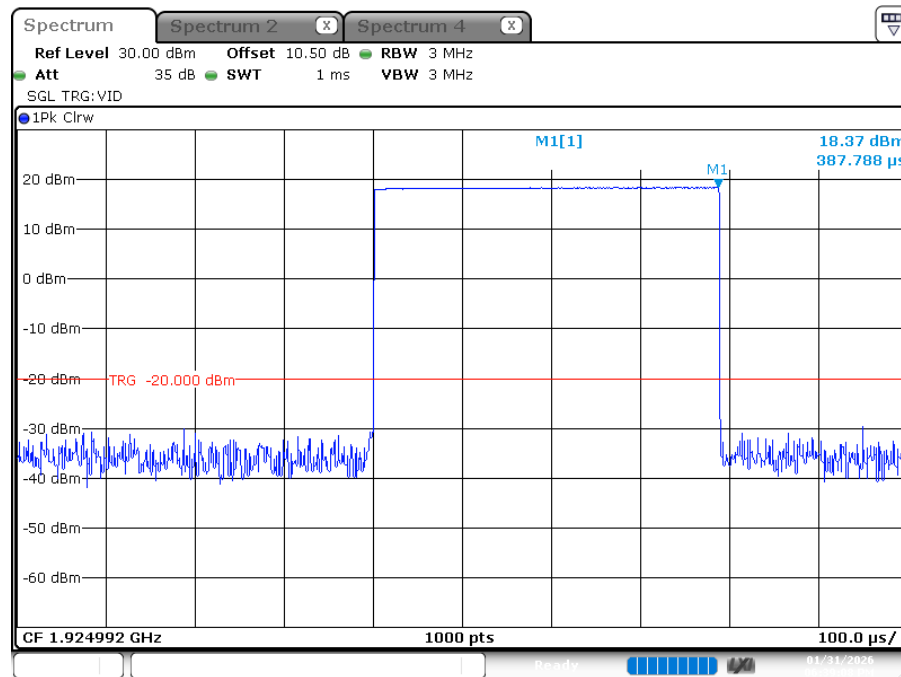


High Channel

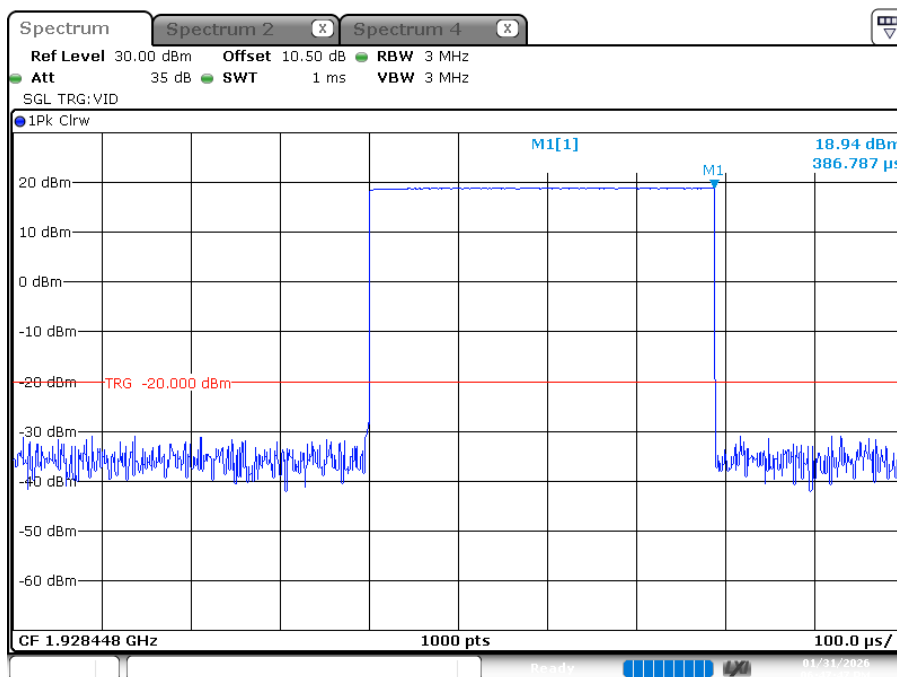

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:47:47


ANT2

Low Channel

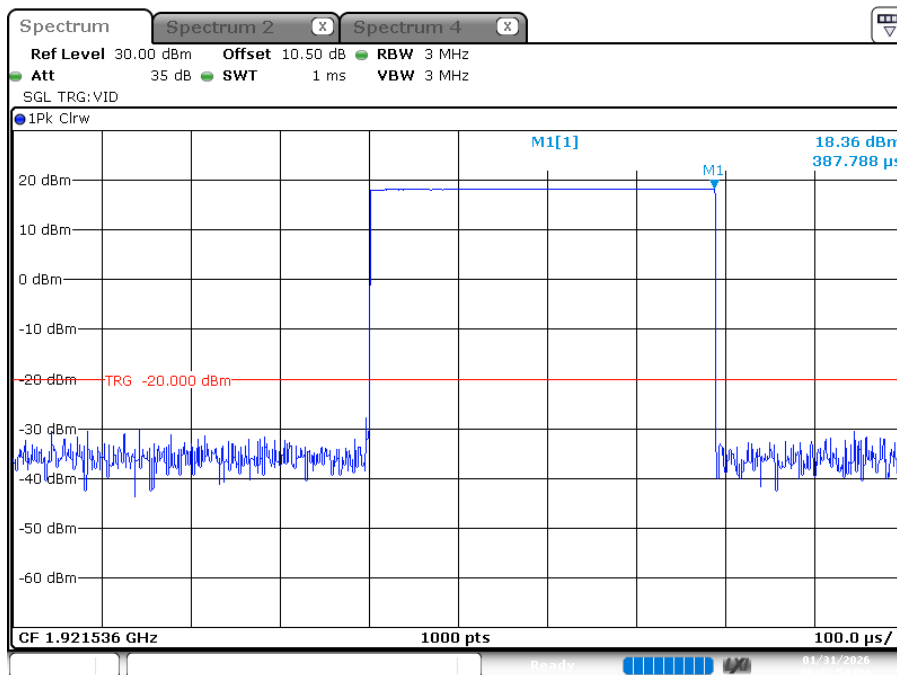


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:43:54

Middle Channel

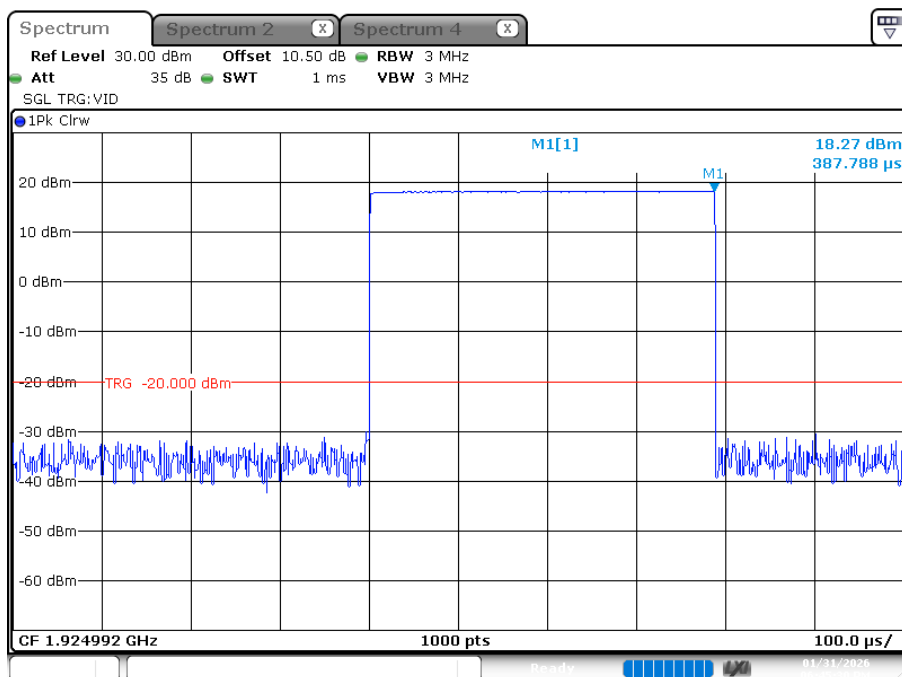

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:45:30

High Channel

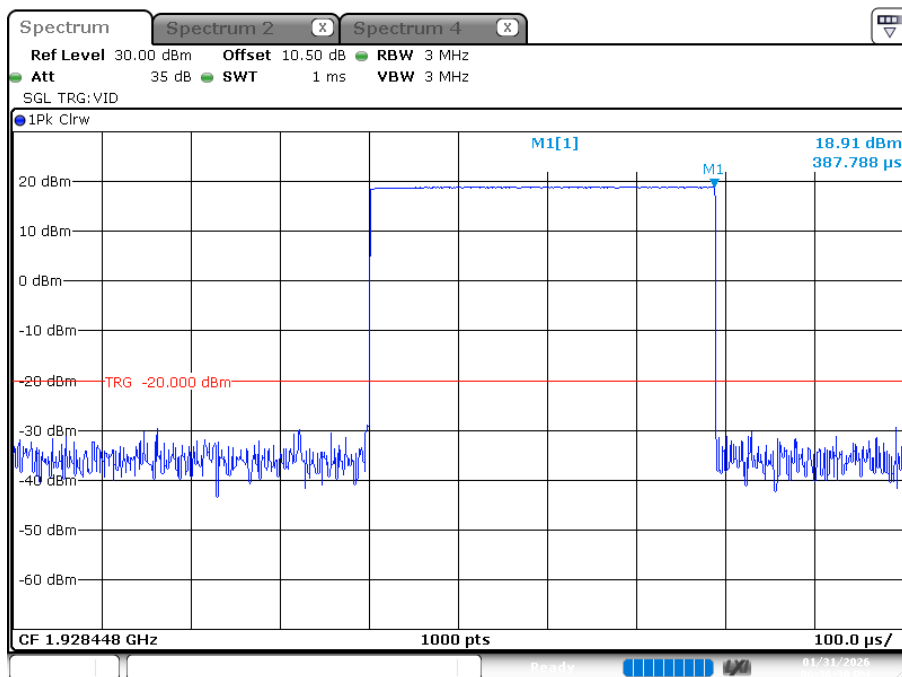


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:36:30

$\pi/2$ -DBPSK:


ANT1

Low Channel

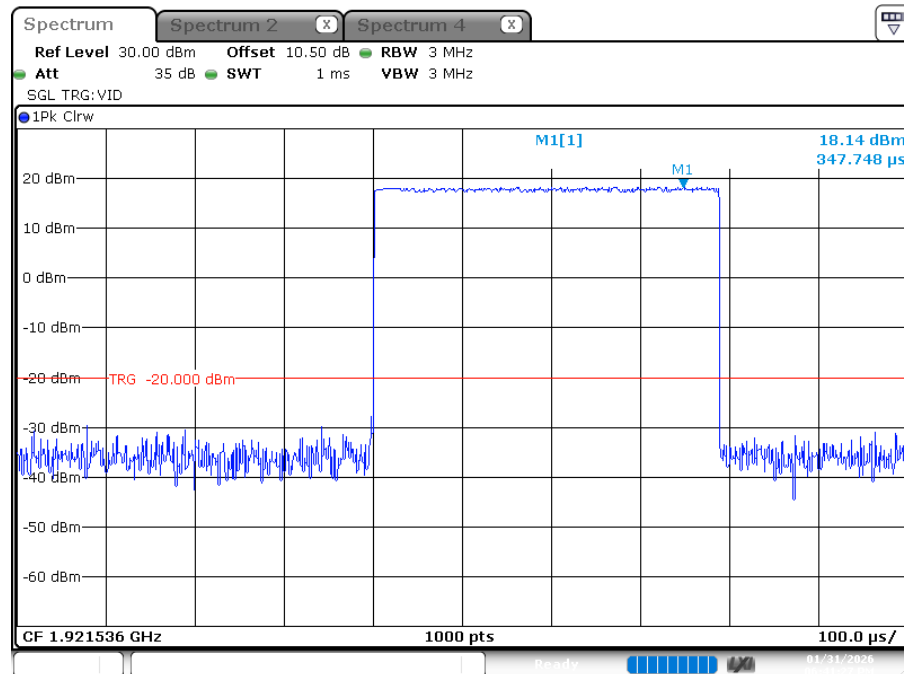


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:41:27

Middle Channel

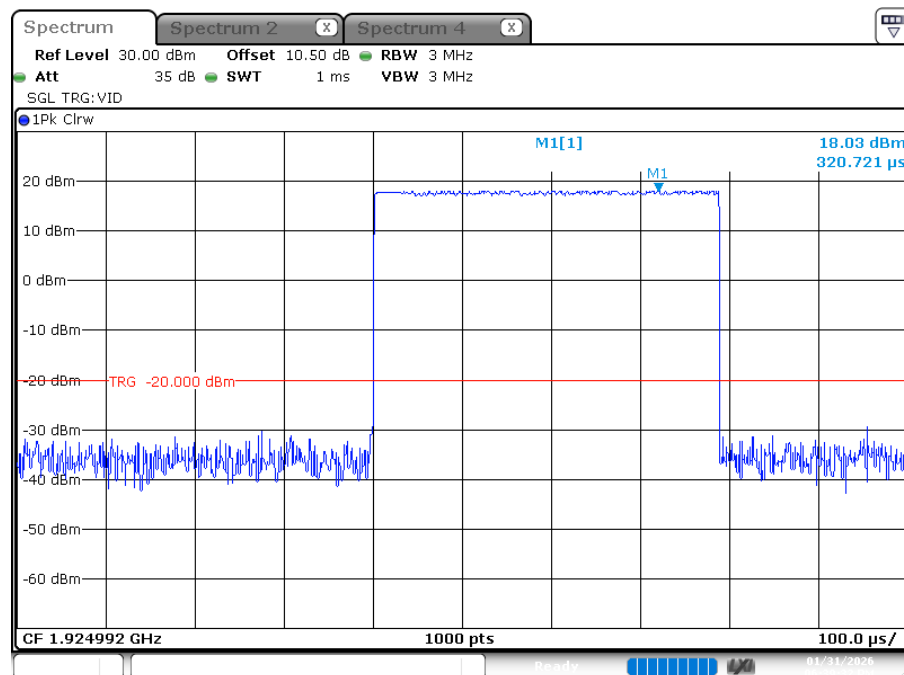

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:39:31


High Channel

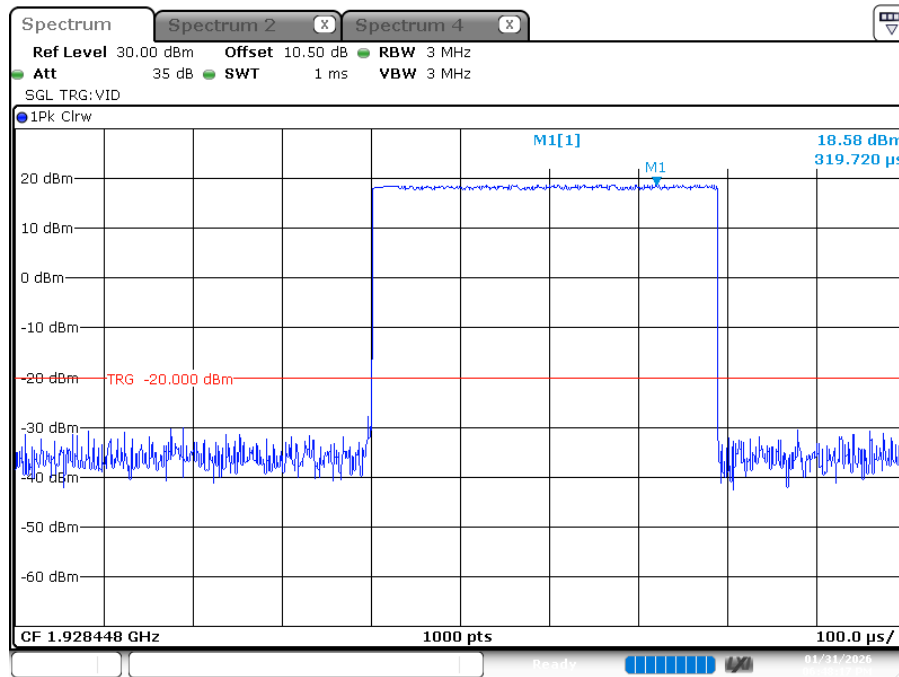

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:48:17


ANT2

Low Channel

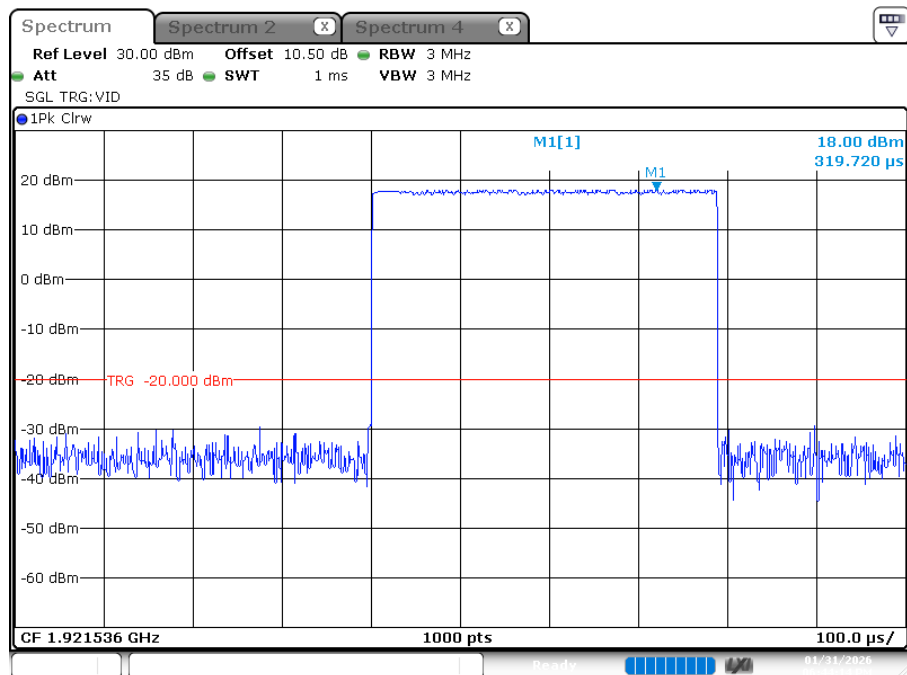


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:44:14

Middle Channel

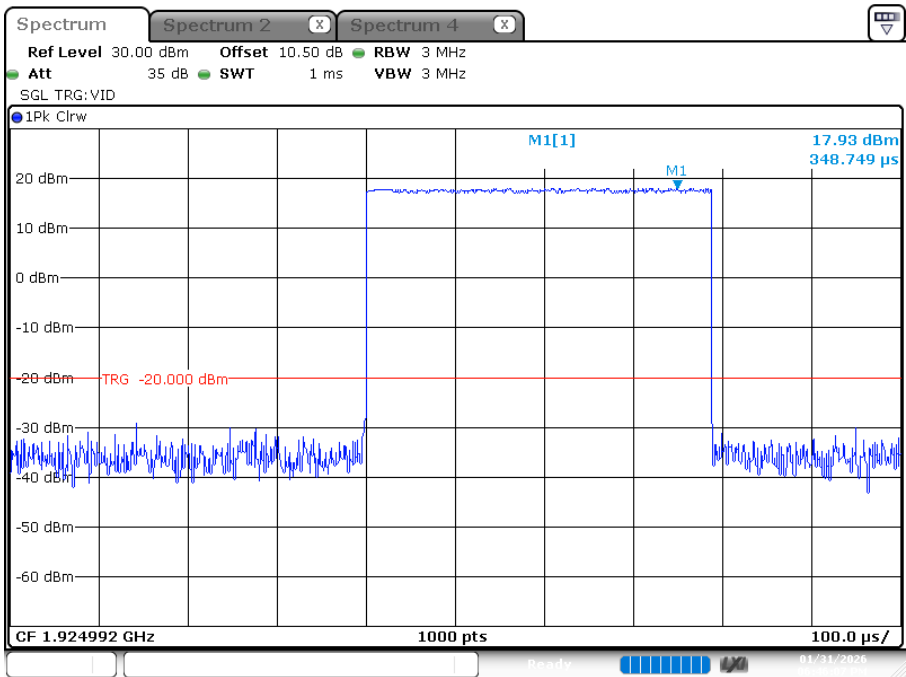

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:46:06

High Channel

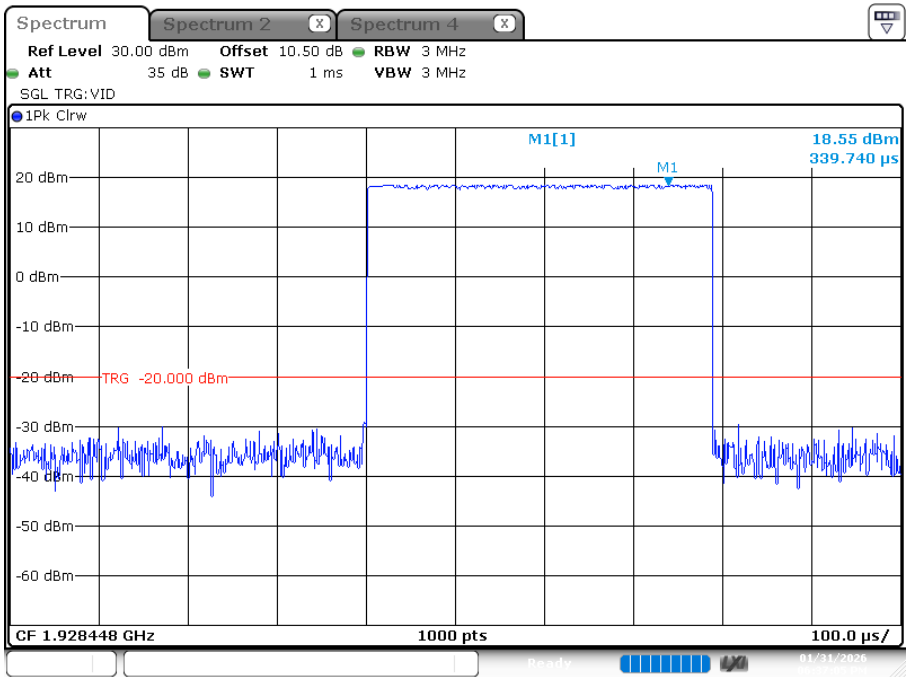


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:37:05

$\pi/4$ -DQPSK:


ANT1

Low Channel

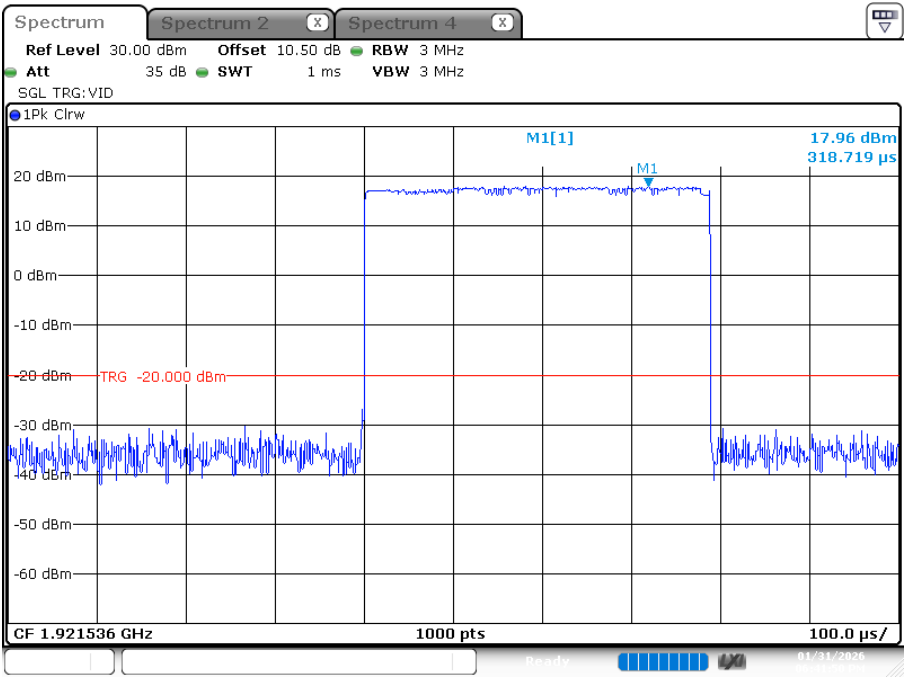


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:41:50

Middle Channel

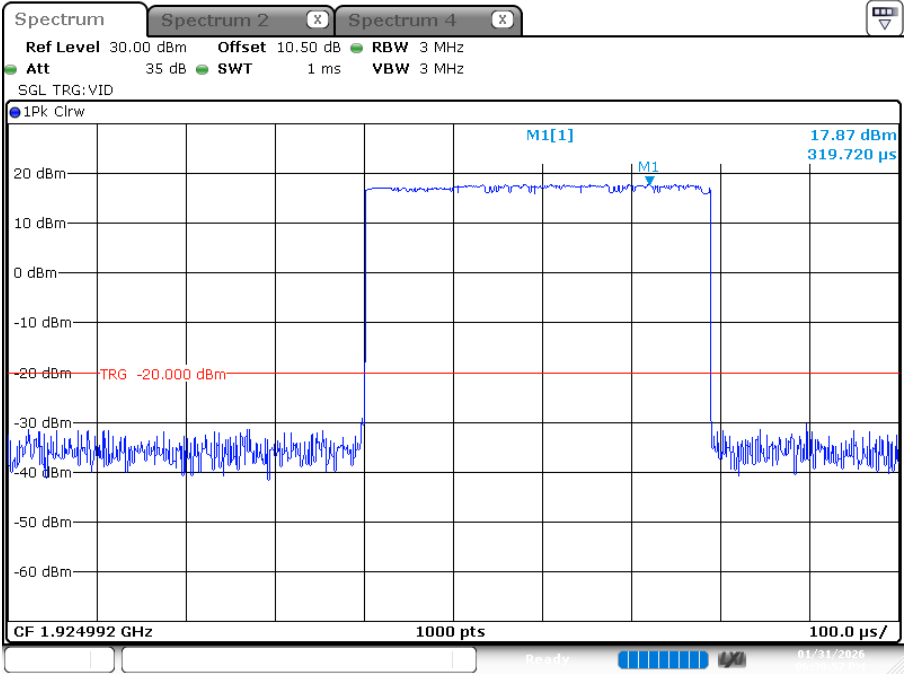

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:39:57


High Channel

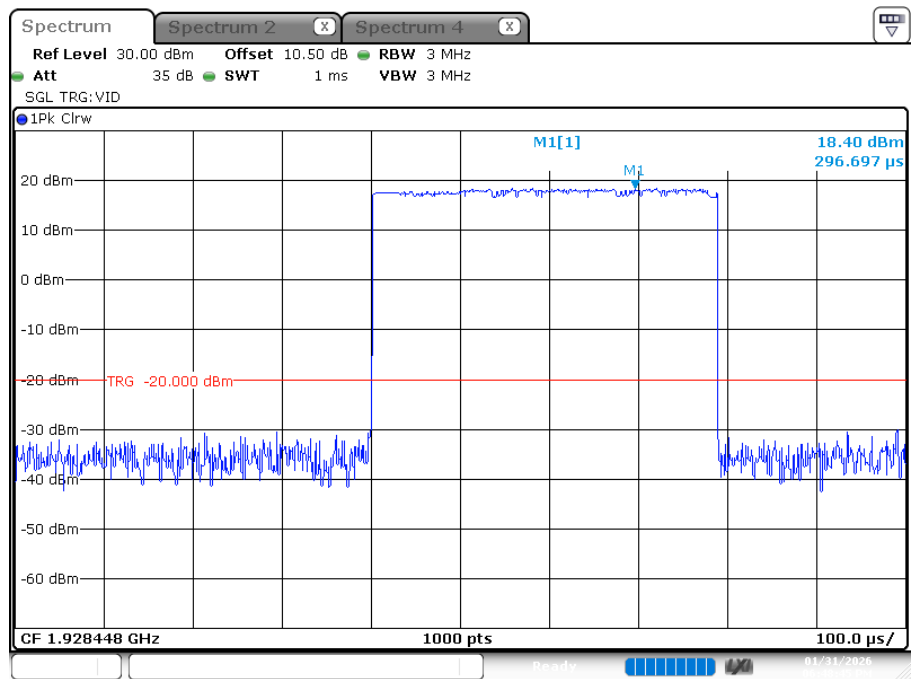

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:48:45


ANT2

Low Channel

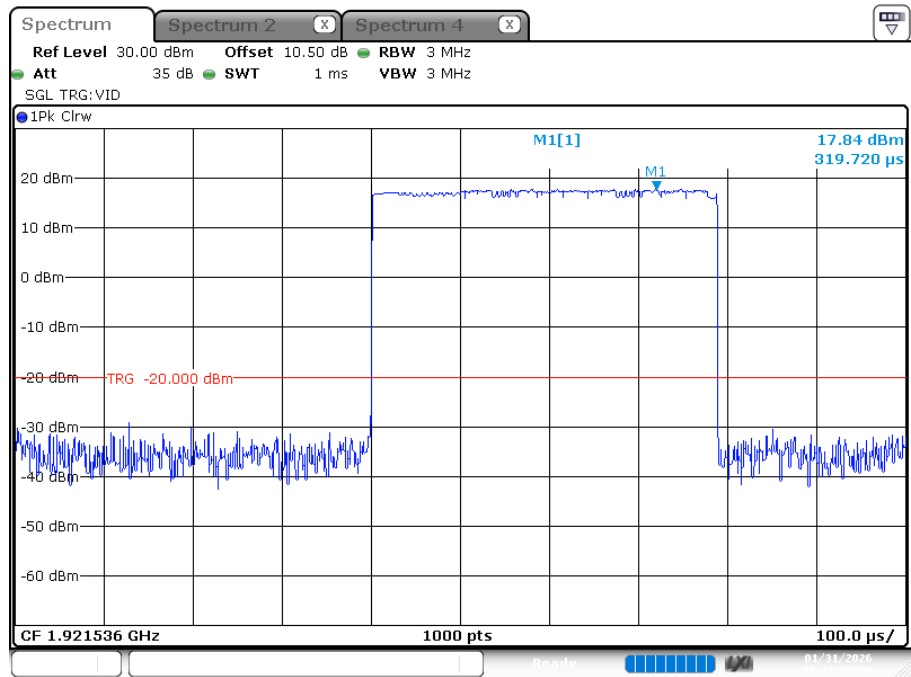


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:44:36

Middle Channel

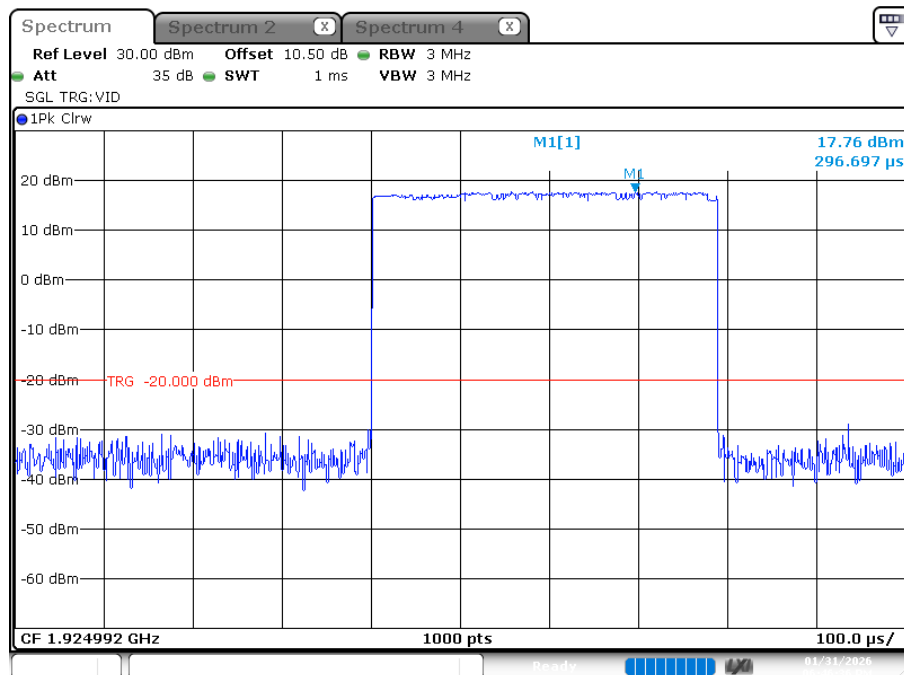

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:46:36

High Channel

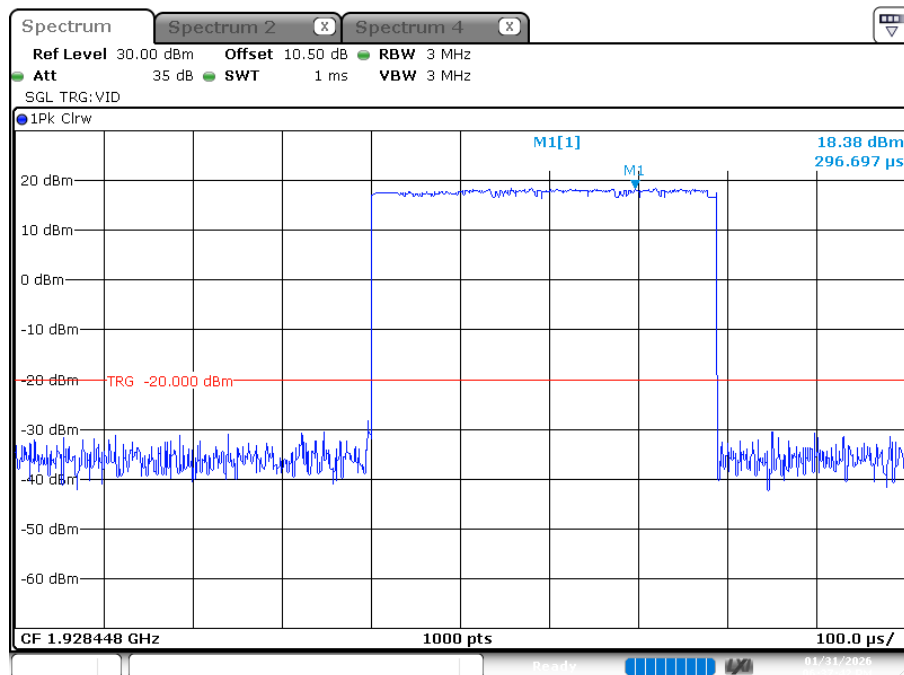


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:37:42

$\pi/8$ -D8PSK:


ANT1

Low Channel

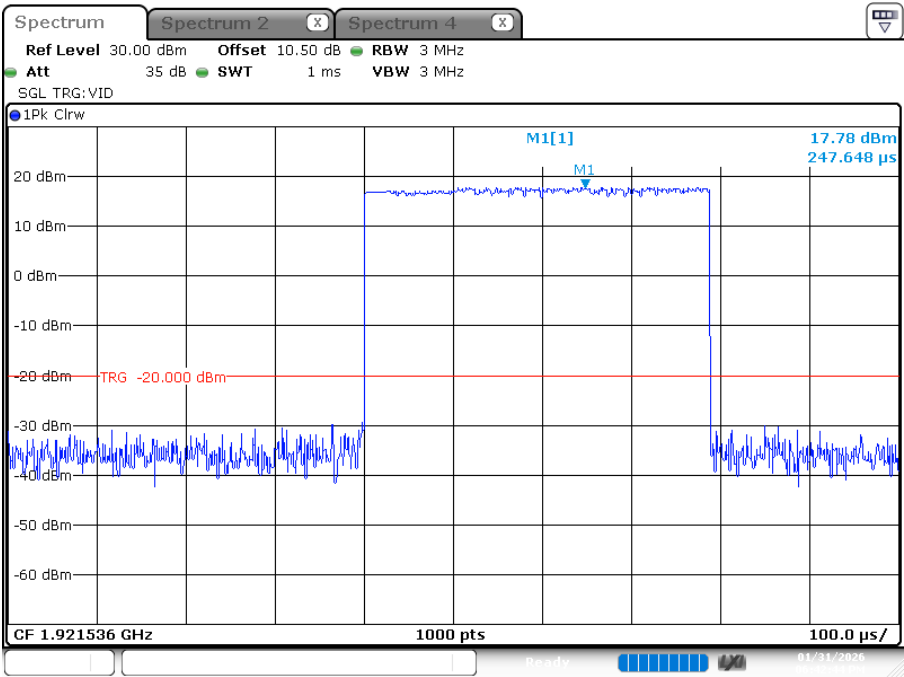


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:42:44

Middle Channel

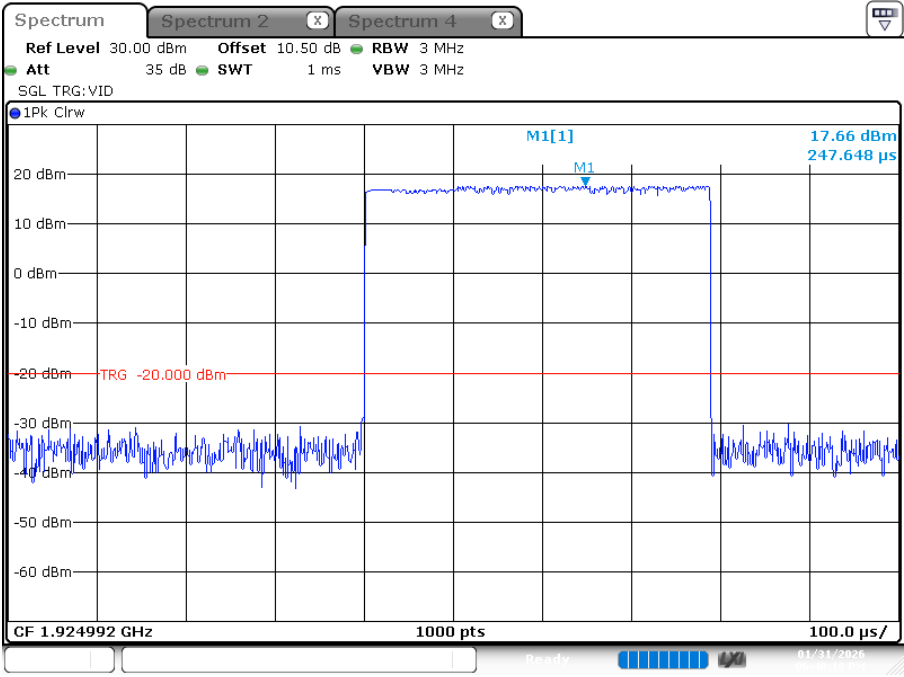

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:40:18


High Channel

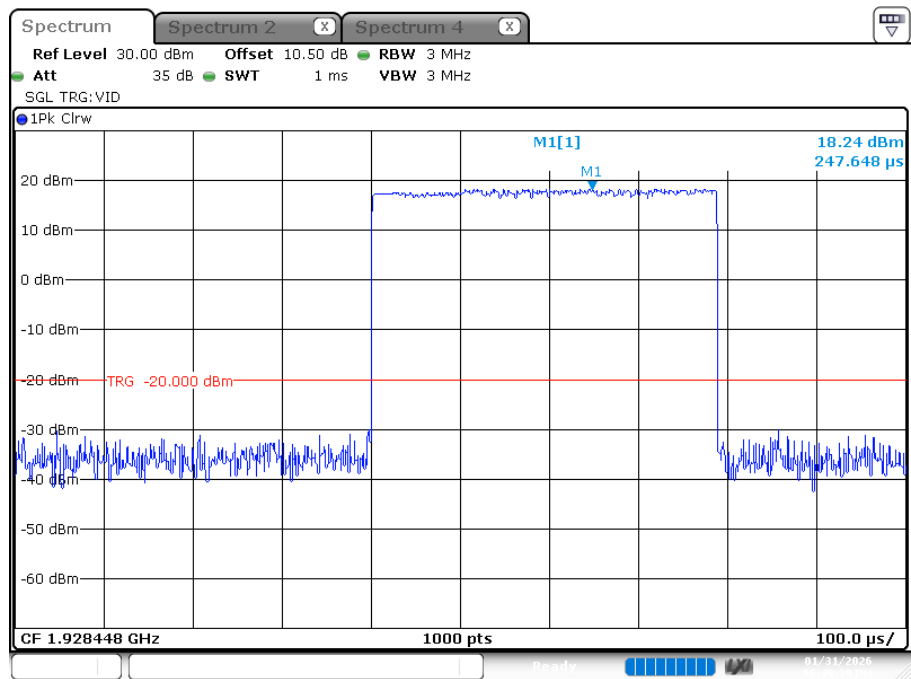

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:49:18


ANT2

Low Channel

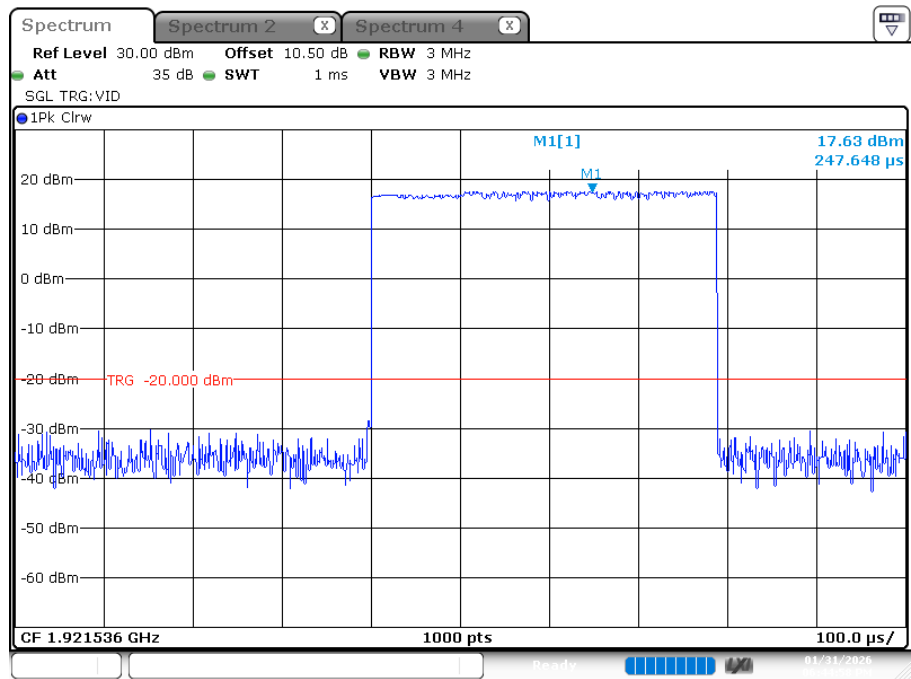


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:44:58

Middle Channel

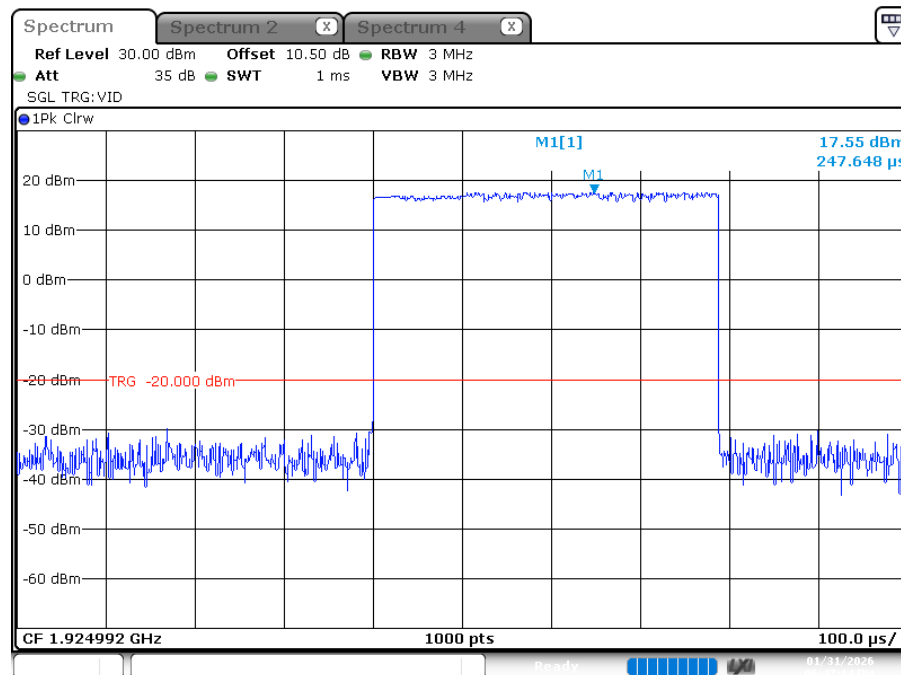

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:47:14

High Channel

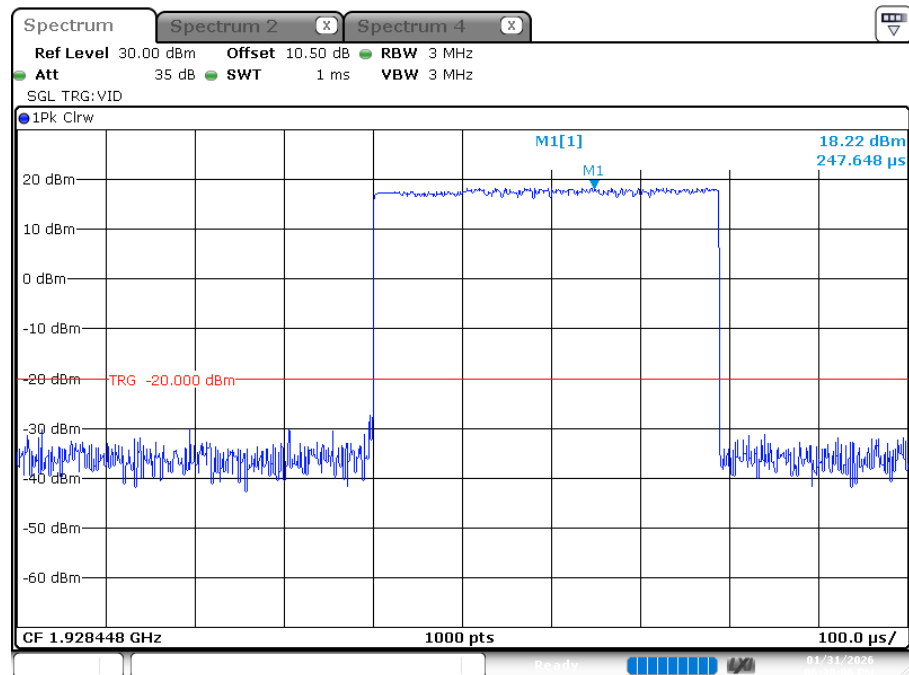

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:38:06

FCC § 15.319 (d) & RSS-213 §5.7 POWER SPECTRAL DENSITY

Applicable Standard

According to FCC § 15.319 (d):

The average pulse energy in a 3 kHz bandwidth is divided by the pulse duration.

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

The power spectral density is measured in accordance with ANSI C63.17-2013 Clause 6.1.5.


According to RSS-213 §5.7:

The peak-hold power spectral density of transmitters shall not exceed 12 mW per any 3 kHz bandwidth. As an alternative to the peak-hold power spectral density, the time-averaged power spectral density may be measured and it shall not exceed 3 mW per any 3 kHz bandwidth.

Test Procedure

Using the manufacturer's information on occupied bandwidth set the spectrum analyzer as follows:

RBW	3 kHz
Video bandwidth	$\geq 3 \times \text{RBW}$
Span	Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)
Center frequency	Spectral peak as determined in 6.1.3
Sweep time	For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 μs). For continuous signals, 20 ms.
Amplitude scale	Log power
Detection	Sample detection and averaged for a minimum of 100 sweeps
Trigger	External or internal

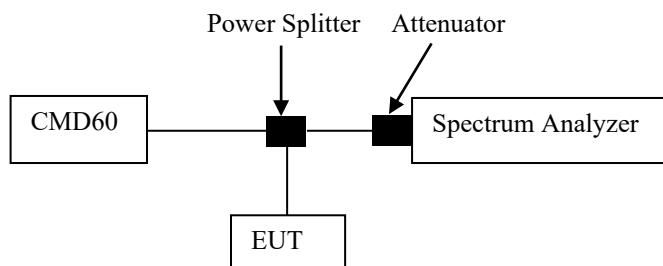

Note: Offset (10.5dB) = Attenuator (3dB) + (Cable loss 1 + Cable loss 2) (1.5dB) + Splitter insert loss (6dB) = 10.5dB

Test Data**Environmental Conditions**

Temperature:	25.5~25.6 °C
Relative Humidity:	45~49 %
ATM Pressure:	100.7~101 kPa

The testing was performed by Cheeb Huang on 2026-01-31.


Test mode: Transmitting

Test Result: Compliant. Please refer to following table and plots

Mode	Channel	Center Frequency (MHz)	Power Spectral Density		Limit (mW/3kHz)
			(dBm/3kHz)	(mW/3kHz)	
GFSK	Low	1921.536	-2.95	0.507	3
	Middle	1924.992	-2.68	0.540	3
	High	1928.448	-2.25	0.596	3
$\pi/2$ -DBPSK	Low	1921.536	-7.10	0.195	3
	Middle	1924.992	-6.80	0.209	3
	High	1928.448	-6.39	0.230	3
$\pi/4$ -DQPSK	Low	1921.536	-4.25	0.376	3
	Middle	1924.992	-5.95	0.254	3
	High	1928.448	-4.03	0.395	3
$\pi/8$ -D8PSK	Low	1921.536	-6.91	0.204	3
	Middle	1924.992	-7.30	0.186	3
	High	1928.448	-6.57	0.220	3


GFSK:

Low Channel

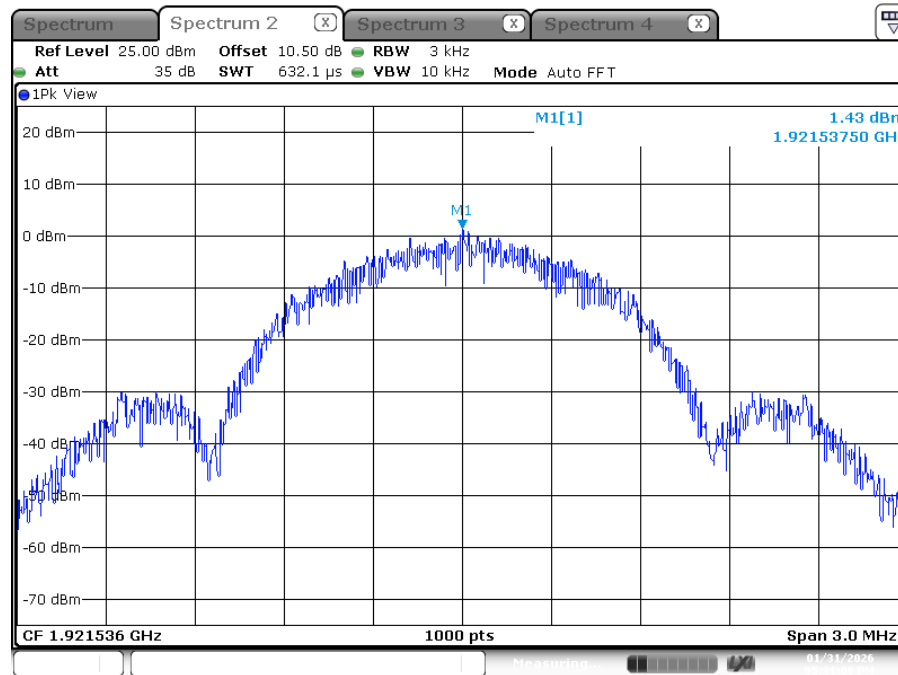

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:31:08

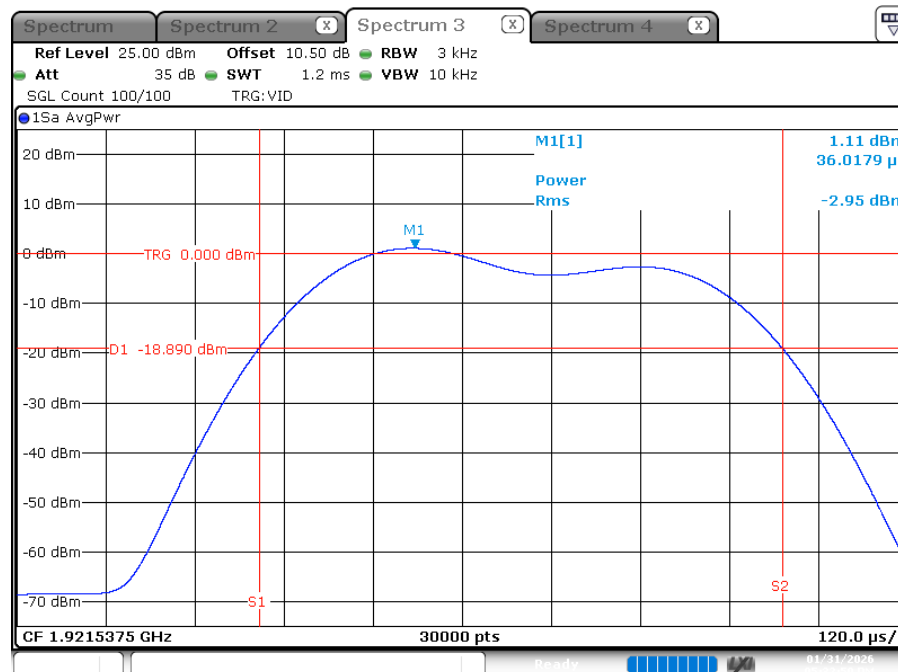


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:32:59

Middle Channel

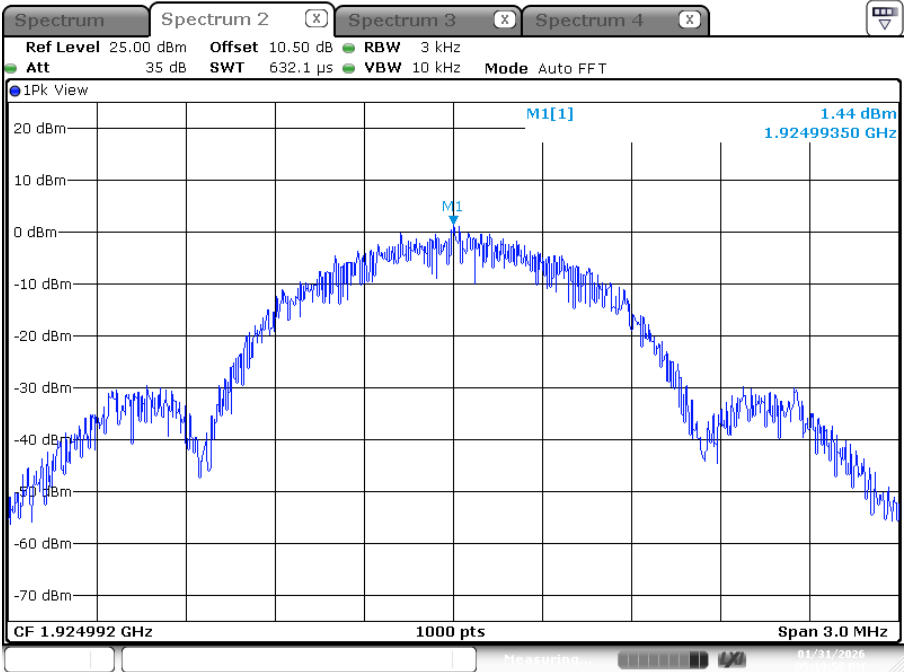

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:19:58

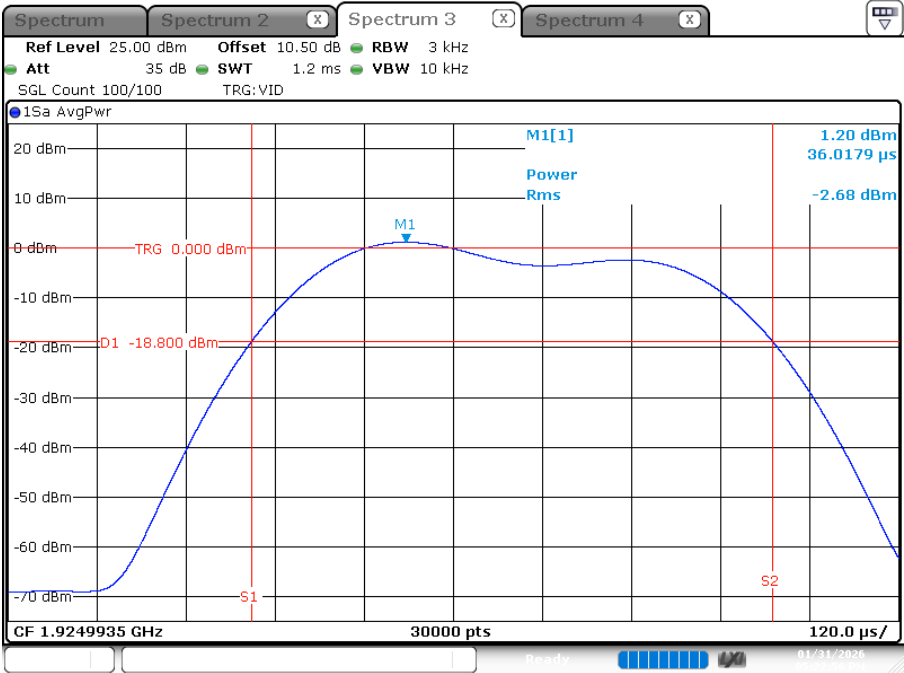

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:22:56

Spectrum 2 Spectrum 3 Spectrum 4

Ref Level 25.00 dBm Offset 10.50 dB RBW 3 kHz
 Att 35 dB SWT 632.1 μs VBW 10 kHz Mode Auto FFT

1Pk View

M1[1] 1.78 dBm
 1.92844950 GHz

CF 1.92848 GHz 1000 pts Span 3.0 MHz

Spectrum 3

Ref Level 25.00 dBm Offset 10.50 dB RBW 3 kHz
 Att 35 dB SWT 1.2 ms VBW 10 kHz
 SGL Count 100/100 TRG: VID

1Sa AvgPwr

20 dBm
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

M1[1]
Power
Rms

1.67 dBm
20.0173 μ s
-2.25 dBm


TRG 1.000 dBm
D1 -18.330 dBm
S1
S2

CF 1.9284495 GHz 30000 pts 120.0 μ s/

Version 3.0


$\pi/2$ -DBPSK:

Low Channel

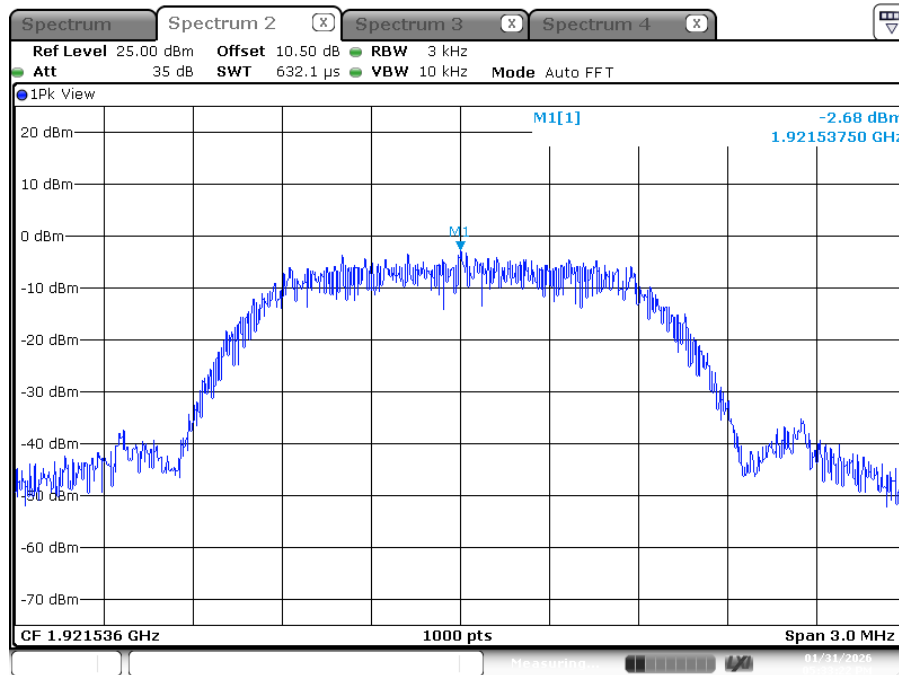

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:33:22

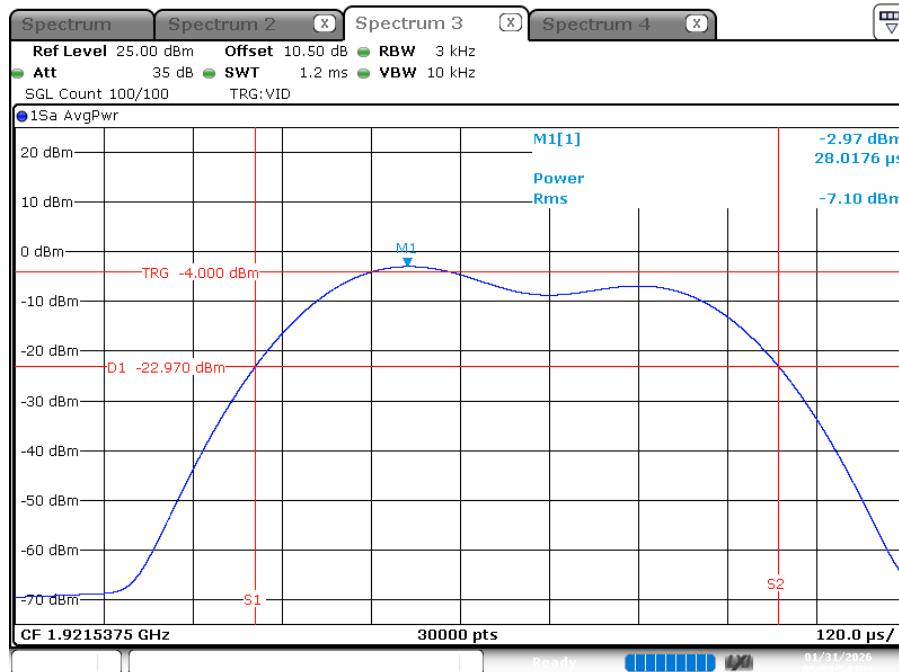


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:34:53

Middle Channel

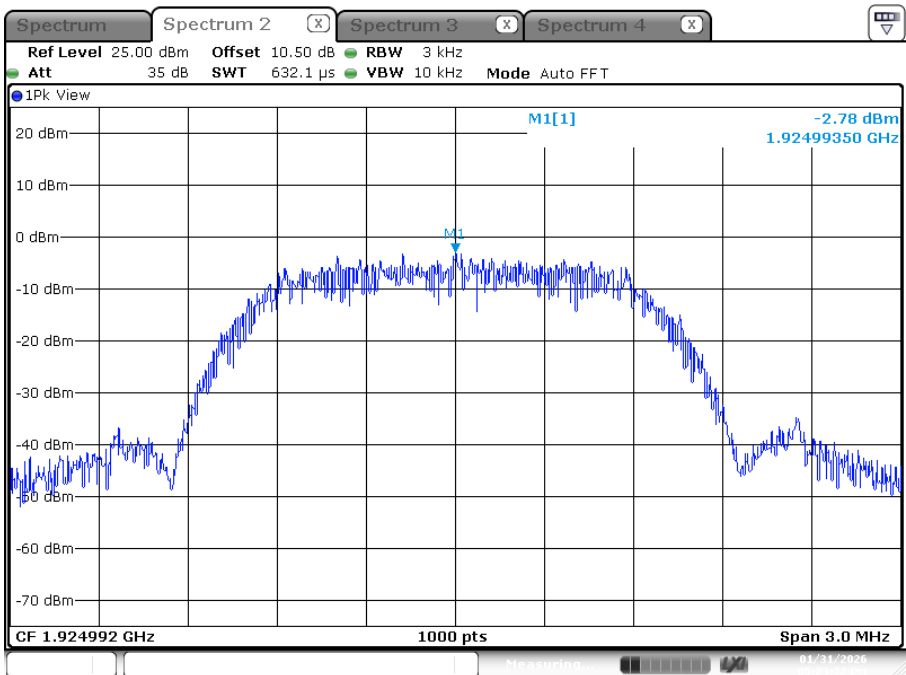


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:23:32

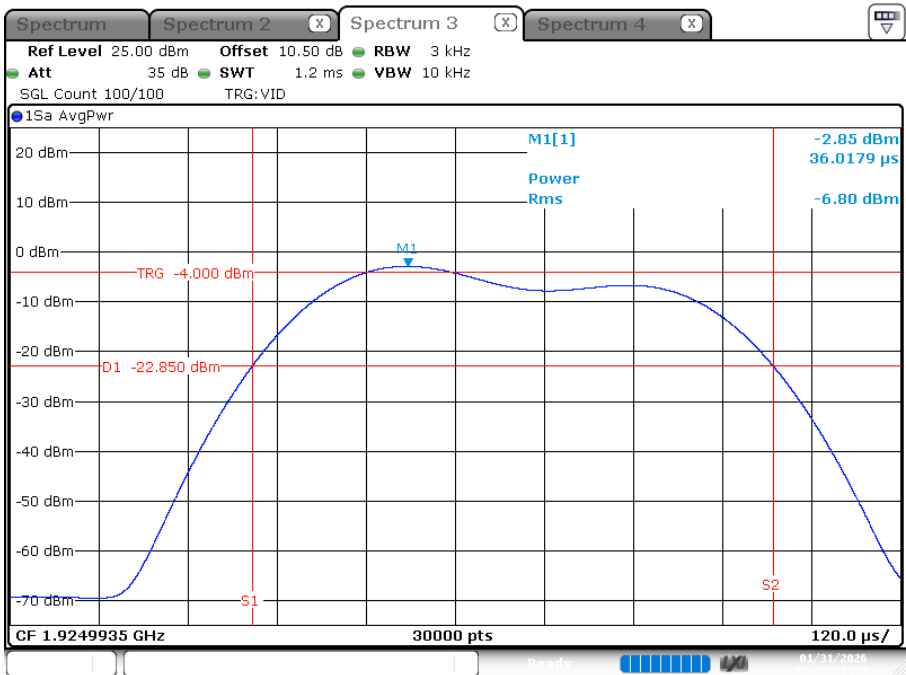


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:25:19

High Channel

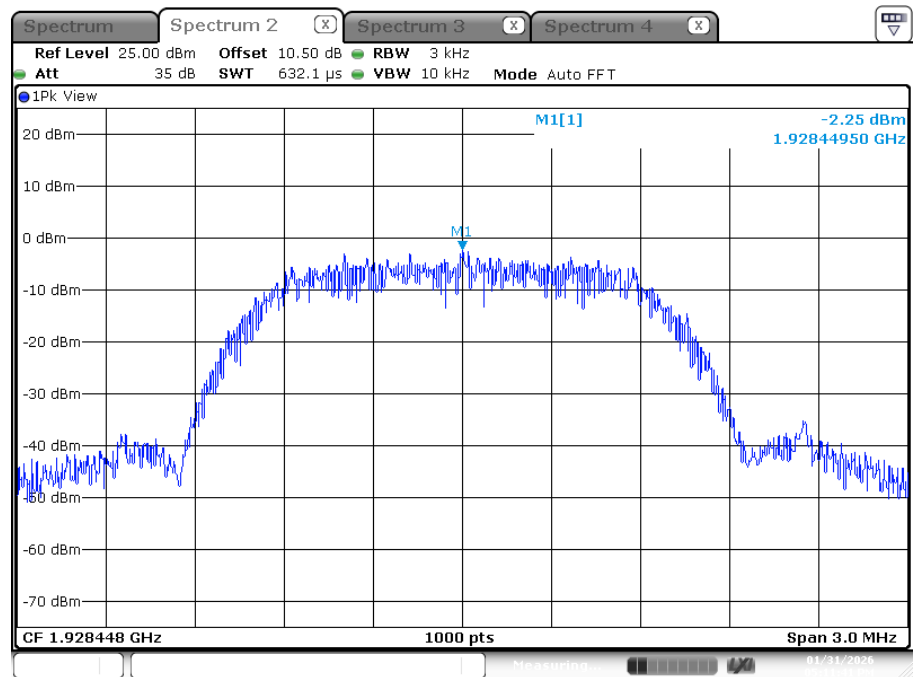

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:11:40

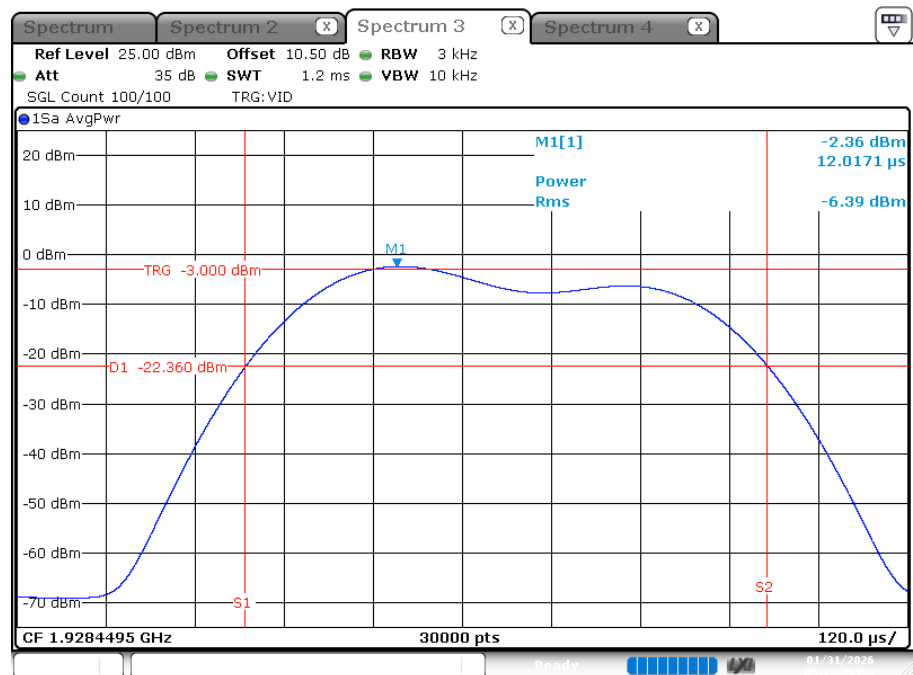


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:13:35


$\pi/4$ -DQPSK:

Low Channel

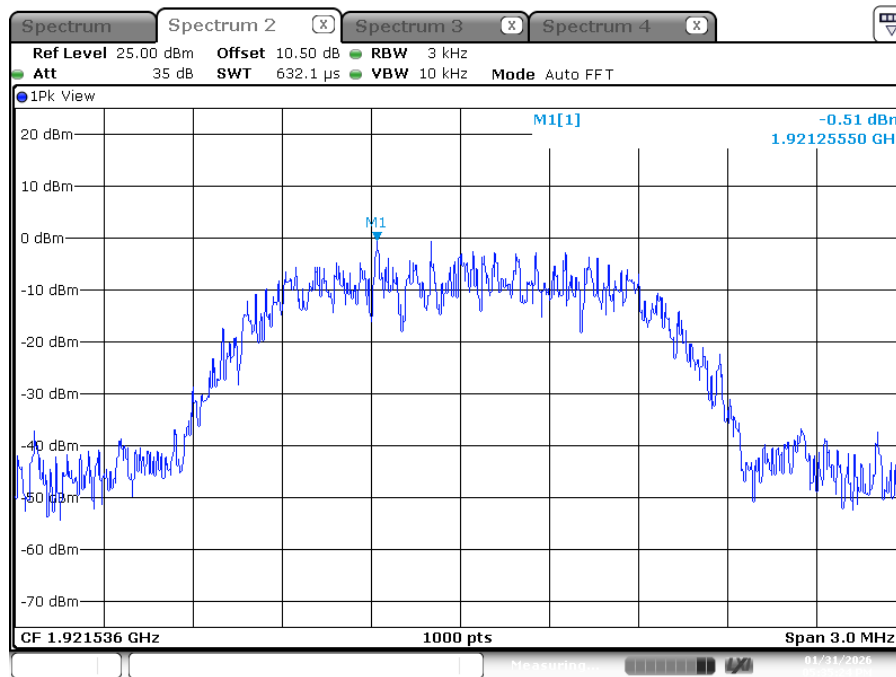

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:35:24

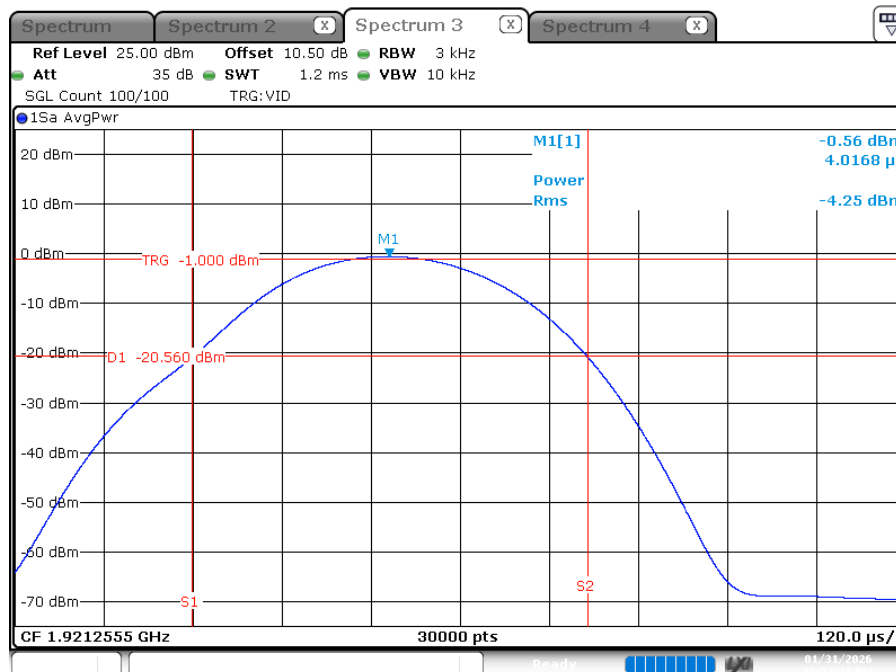

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:37:27

Middle Channel

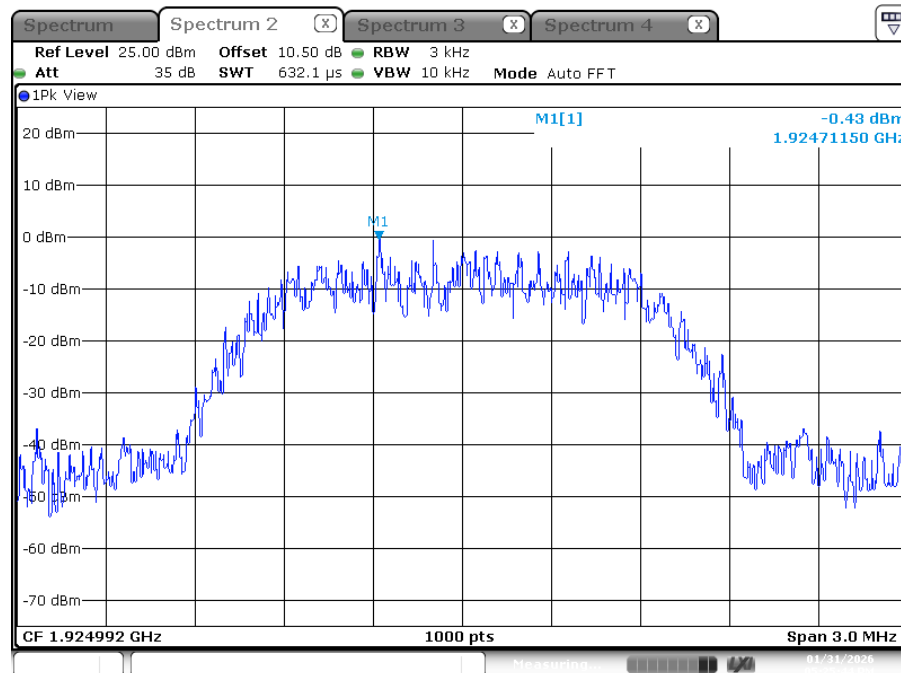

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang



Date: 31.JAN.2026 17:25:44

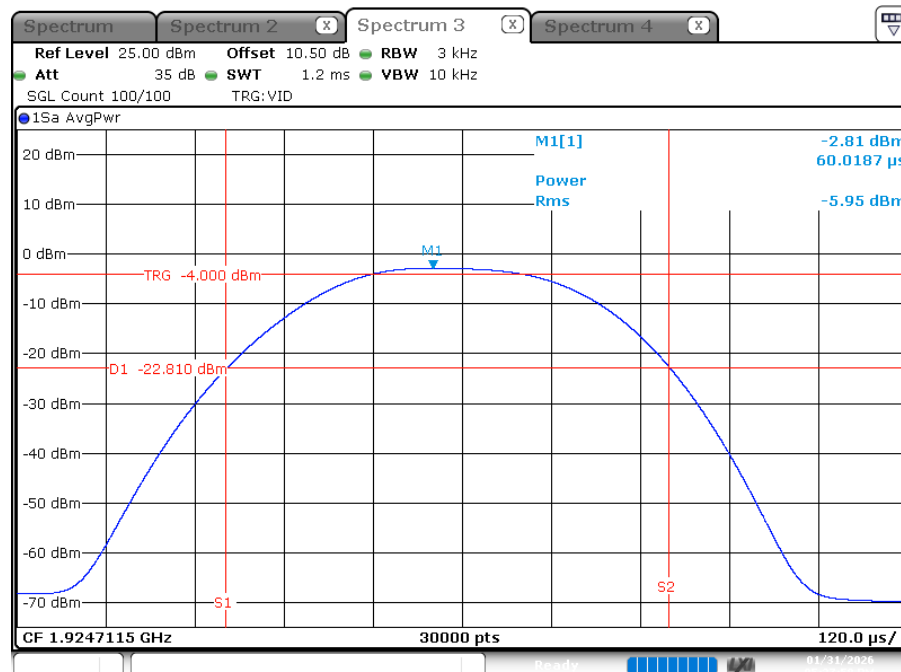

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:27:58

High Channel

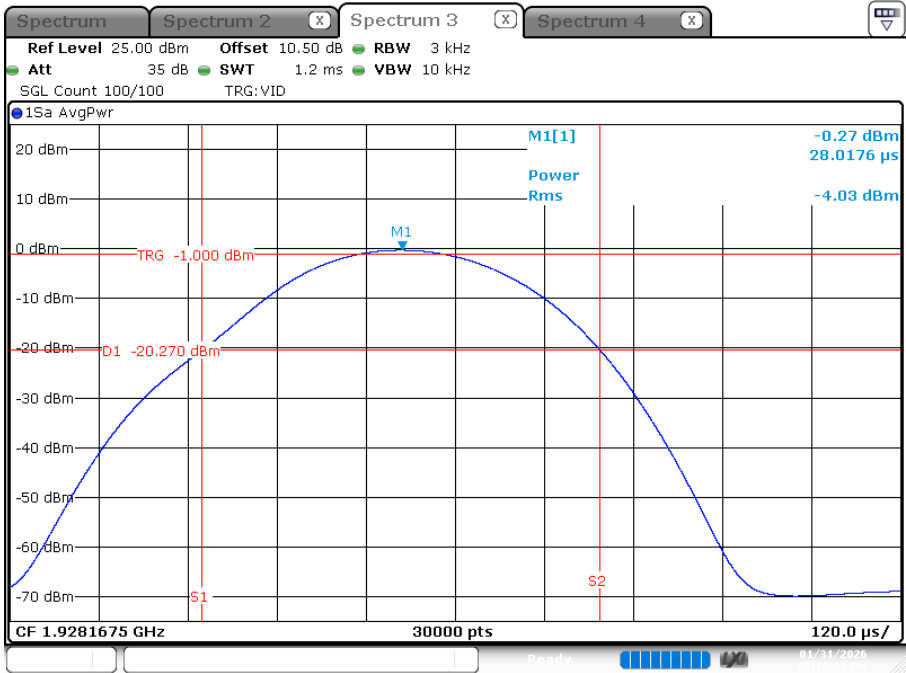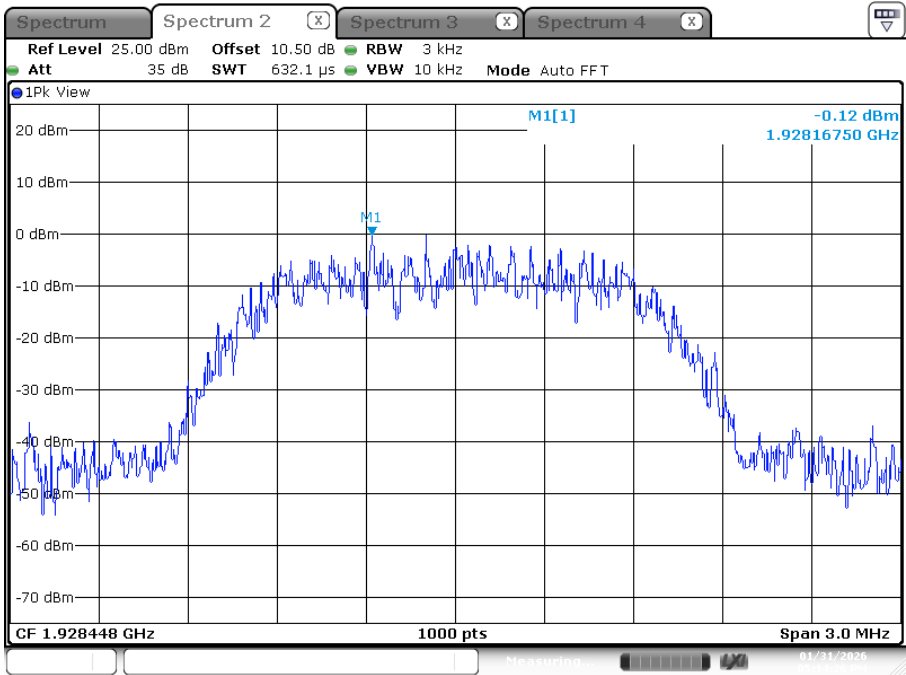


$\pi/8$ -D8PSK:

Low Channel

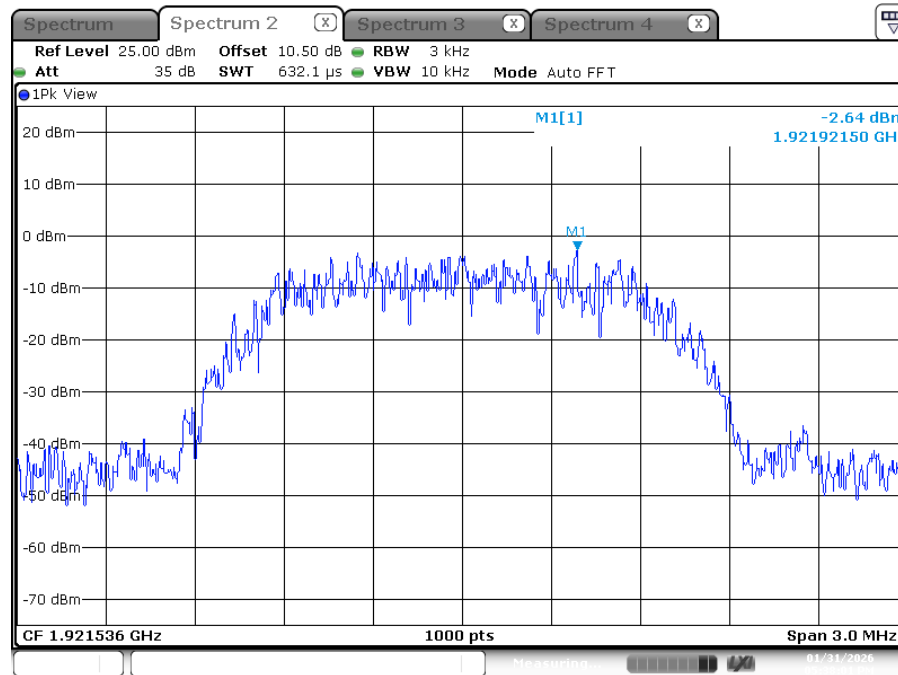


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:38:01

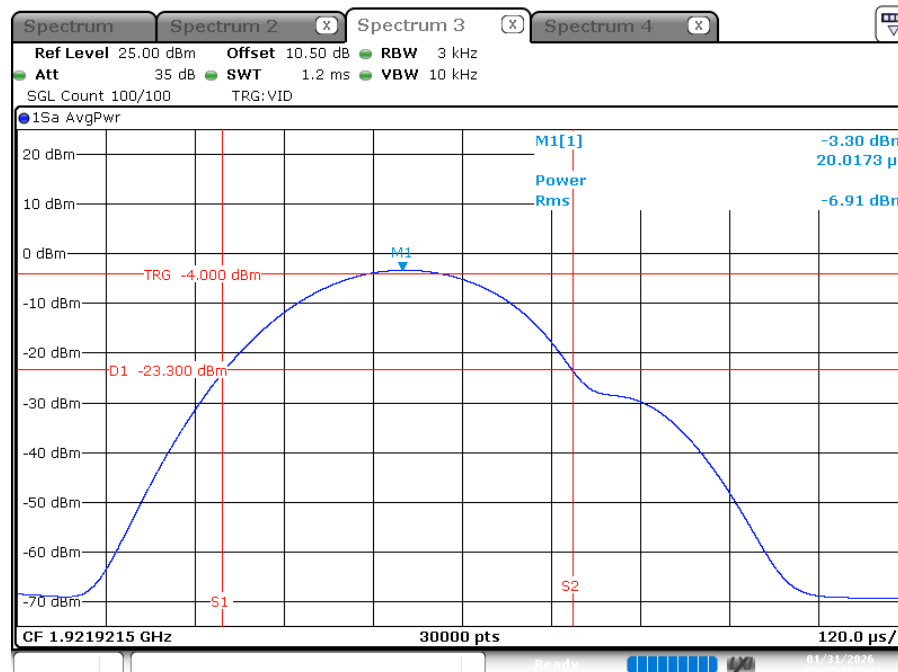


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:40:00

Middle Channel

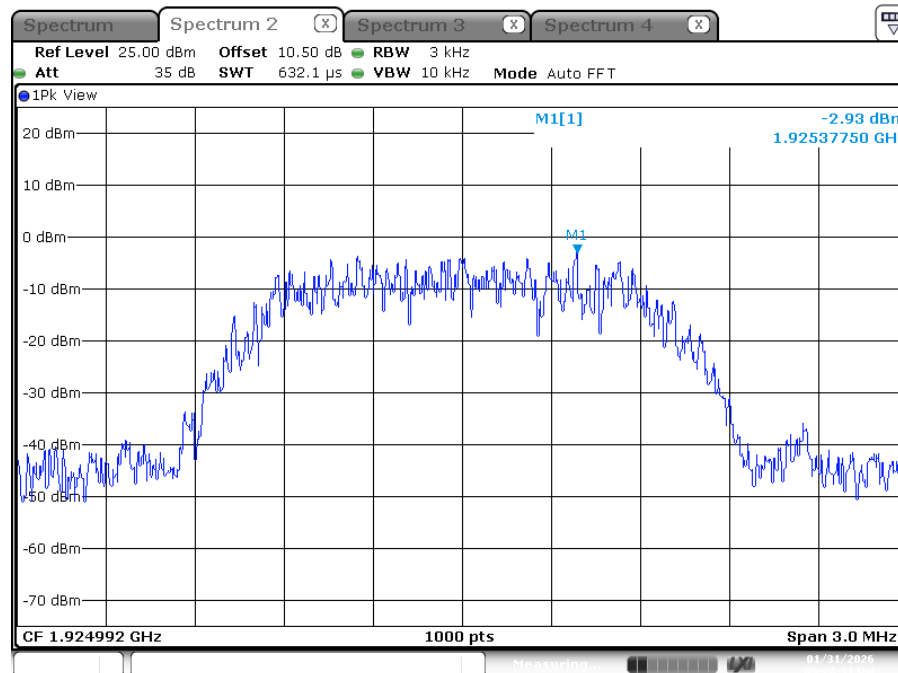

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:28:31

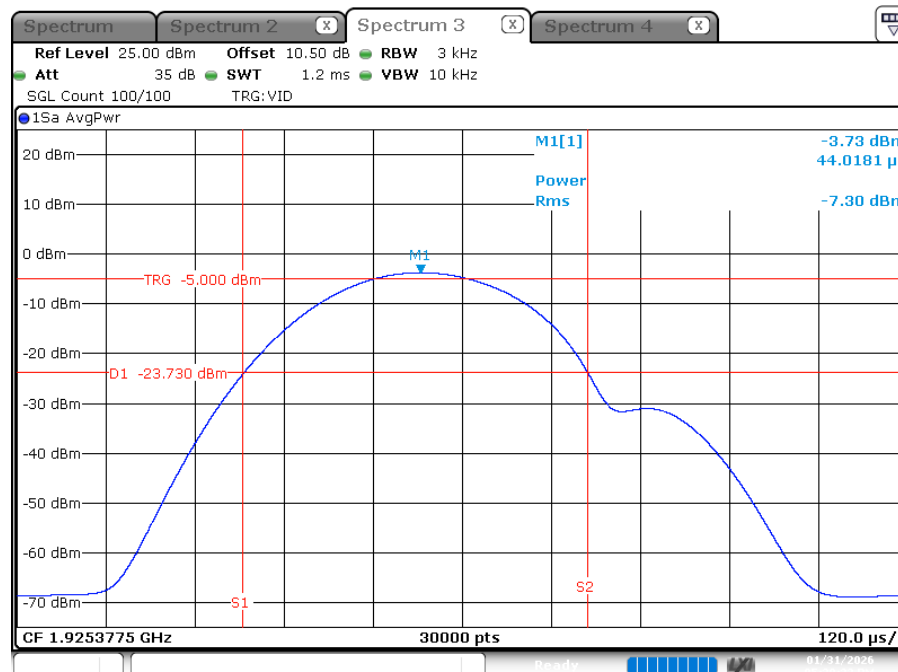


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:30:22

High Channel

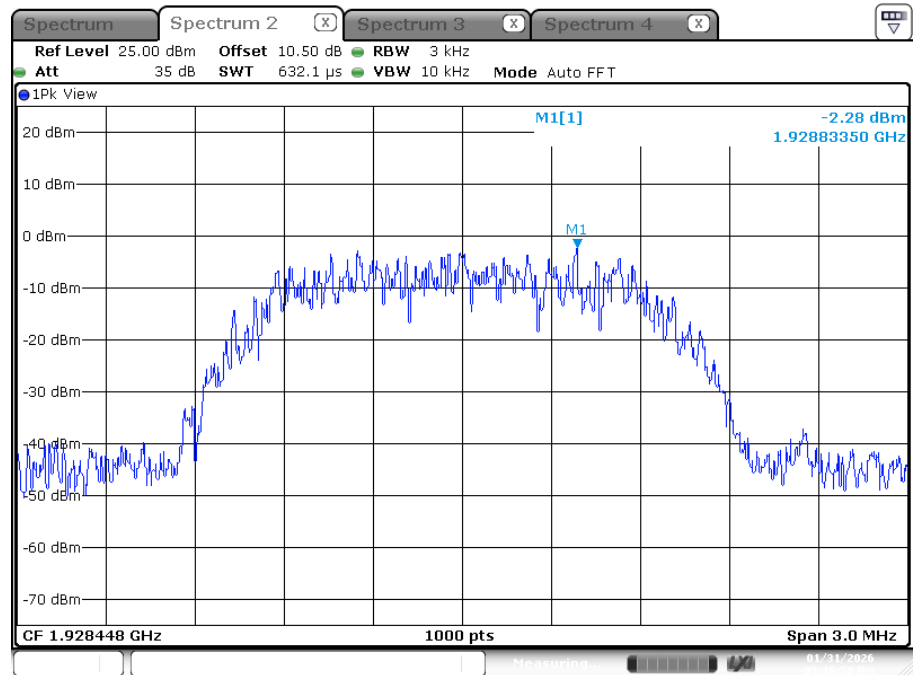

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:16:58

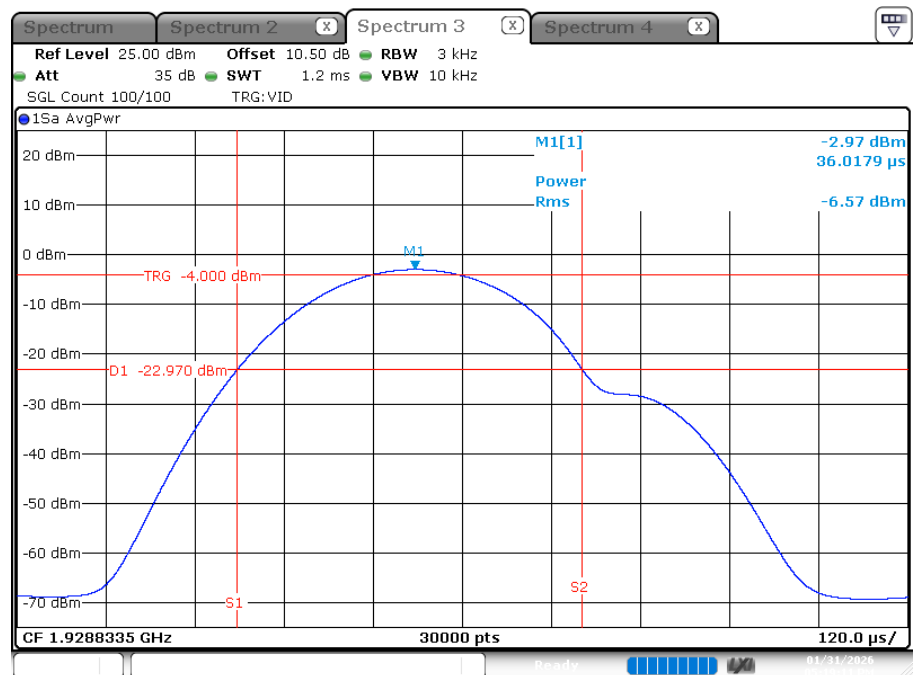

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:19:11

FCC § 15.323 (d) & RSS-213 §5.8 EMISSION INSIDE AND OUTSIDE THE SUB-BAND

Applicable Standard

According to FCC § 15.323 (d):

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device;
2. in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator;
3. in the bands between 3B and the sub-band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator.

Where B = emission bandwidth

Emission Outside the sub-band shall be attenuated below a reference power of 112 mw (20.5 dBm) as follows:

1. 30 dB between the sub-band and 1.25 MHz above or below the sub-band;
2. 50 dB between 1.25 and 2.5 MHz above or below the sub-band;
3. 60 dB at 2.5 MHz or greater above or below the sub-band.

According to RSS-213 §5.8:

Emissions outside the 1920-1930 MHz Band

Emissions outside the 1920-1930 MHz band shall be attenuated below a reference power of 112 milliwatts (-9.5 dBW) by at least:

- 30 dB between the band edges and 1.25 MHz above and below the band edges;
- 50 dB between 1.25 MHz and 2.5 MHz above or below the band edges; and
- 60 dB at 2.5 MHz or greater above or below the band edges.

Emissions inside the 1920-1930 MHz Band

Emissions inside the 1920-1930 MHz band shall be attenuated below the transmit power permitted for that device, as follows:

- 30 dB between the frequencies 1B and 2B measured from the centre of the occupied bandwidth;
- 50 dB between the frequencies 2B and 3B measured from the centre of the occupied bandwidth; and
- 60 dB between the frequencies 3B and band edge, where B is the occupied bandwidth in hertz.

Test Procedure

According to ANSI C63.17.2013 Clause 6.1.6.

In-band emission:

Spectrum analyzer settings for measuring in-band emission

RBW	Approximately 1% of the emission bandwidth (B)
Video bandwidth	$3 \times \text{RBW}$
Sweep time	The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts.
Number of sweeps	Sufficient to stabilize the trace
Amplitude scale	Log
Detection	Peak detection and max hold enabled
Span	Approximately equal to $3.5 B$

Out-band emission:

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and item d), as follows:

- a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -9.5 dBm .
- b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed -29.5 dBm .
- d) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.

For Radiated Emission:

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz–30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak
Above 1 GHz	Fundamental & Harmonics				
	1MHz	3 MHz	/	PK	Peak
	Average level= Peak level+ 20lg (Duty cycle)				
	Other Emissions				
	1MHz	3 MHz	/	PK	Peak
	1MHz	≥10 Hz	/	Average	Peak

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:


$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$



The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$


EUT Setup

9 kHz-30MHz:

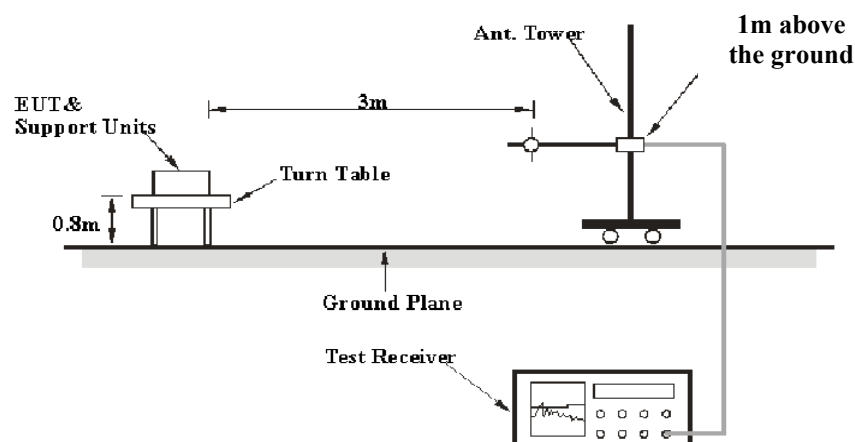

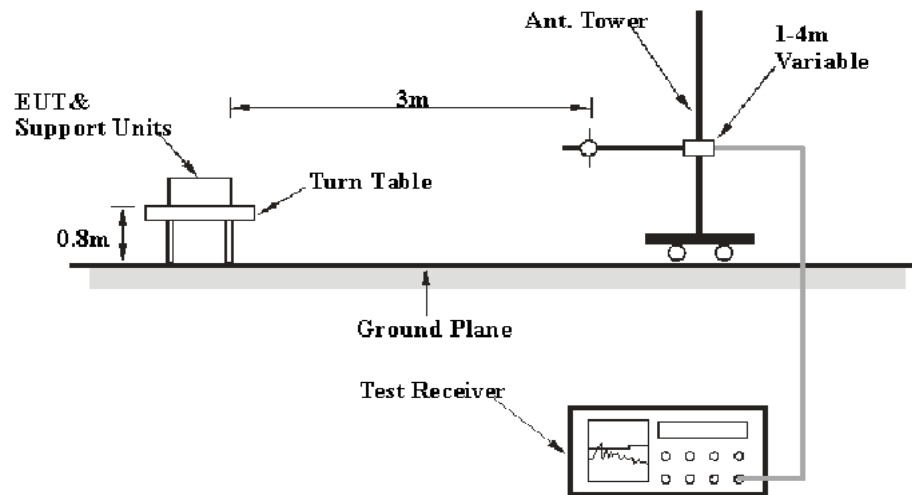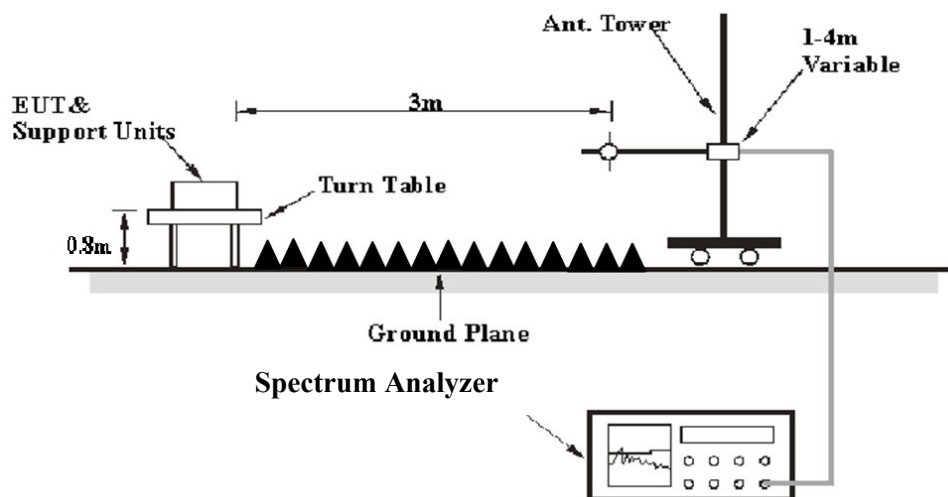30MHz-1GHz:**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site.

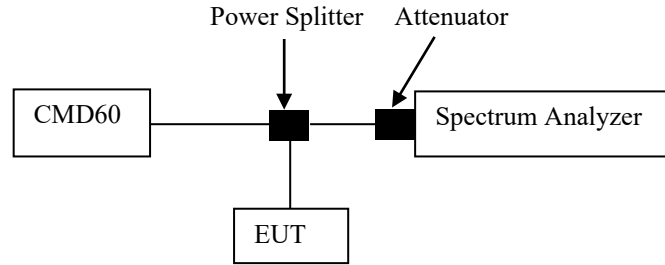RF Conducted Emission:

Note: Offset (10.5dB) = Attenuator (3dB) + (Cable loss 1 + Cable loss 2) (1.5dB)
+ Splitter insert loss (6dB) = 10.5dB

Test Data**Environmental Conditions**

Temperature:	22.8~25.6 °C
Relative Humidity:	45~49 %
ATM Pressure:	100.7~101.7 kPa

The testing was performed by Anson Su on 2026-02-04 for below 1GHz, Wing K Ji on 2026-01-21 for above 1GHz and Cheeb Huang on 2026-01-31 for RF conducted.


Test mode: Transmitting

Test Result: Compliant

Please refer to following plots

GFSK:
FCC:


Low Channel (Unwanted Emission inside the Sub-band)

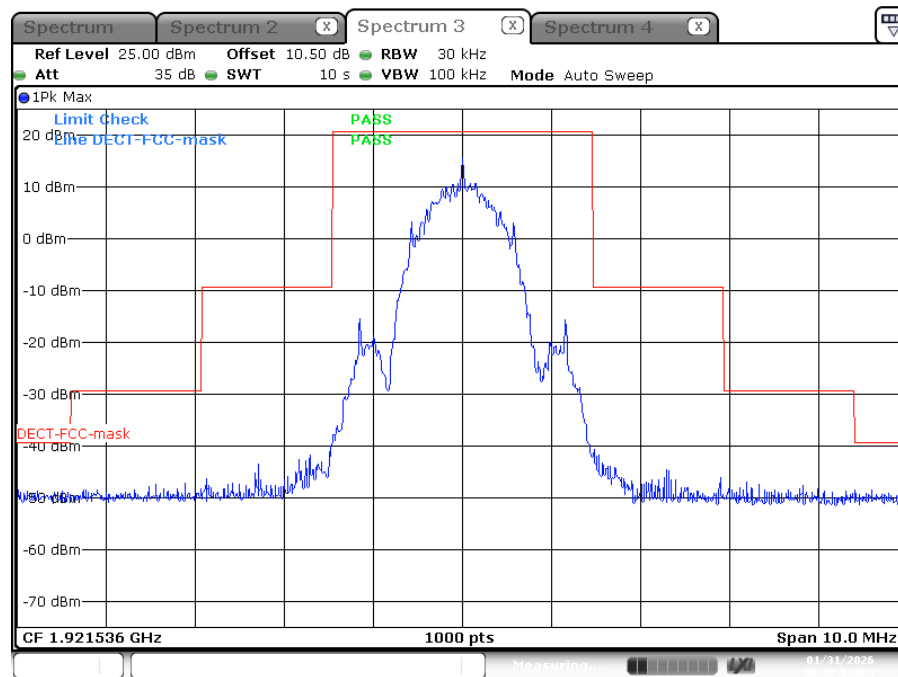

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:17:53


Middle Channel (Unwanted Emission inside the Sub-band)

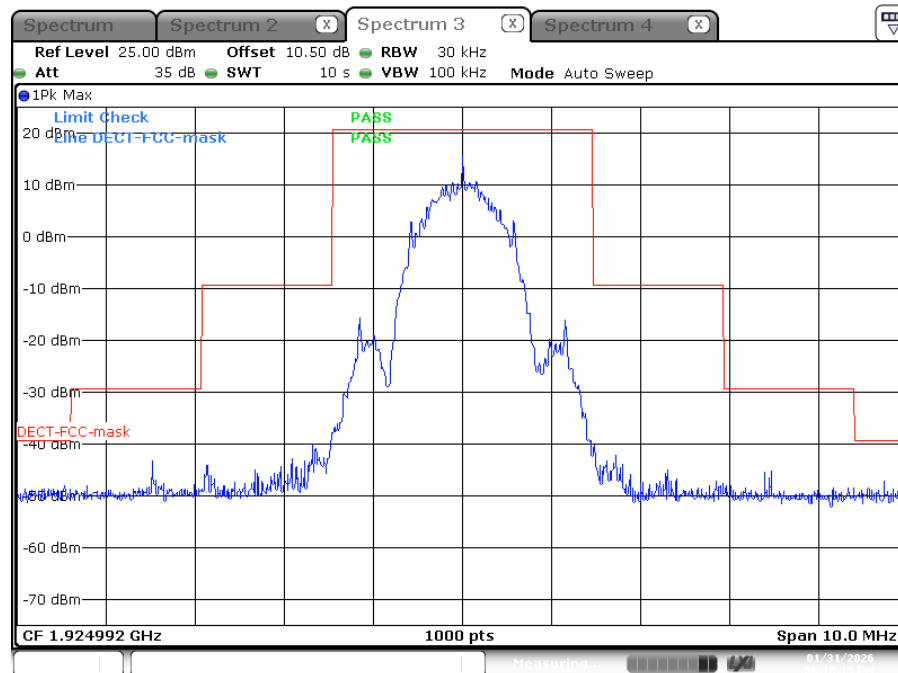

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:10:19


High Channel (Unwanted Emission inside the Sub-band)

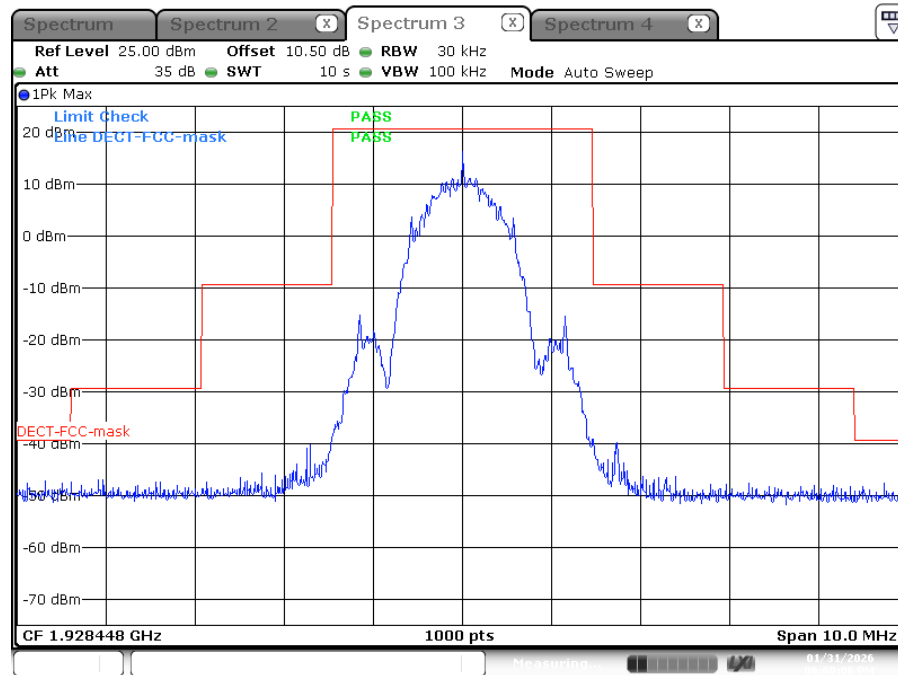


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
 Date: 31.JAN.2026 18:00:06

ISED:


Low Channel (Unwanted Emission inside the Sub-band)

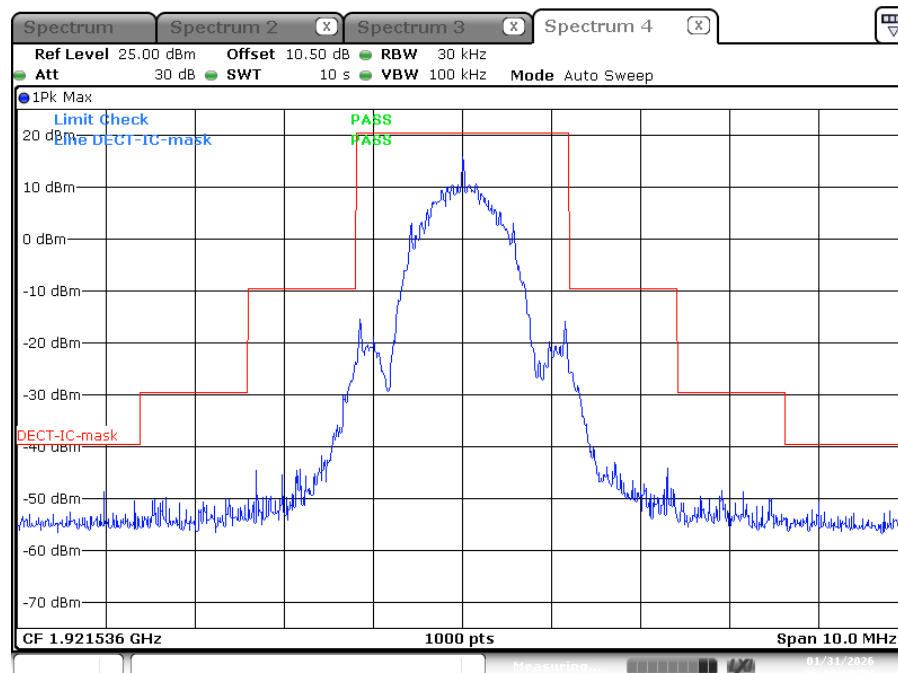


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
 Date: 31.JAN.2026 18:18:16

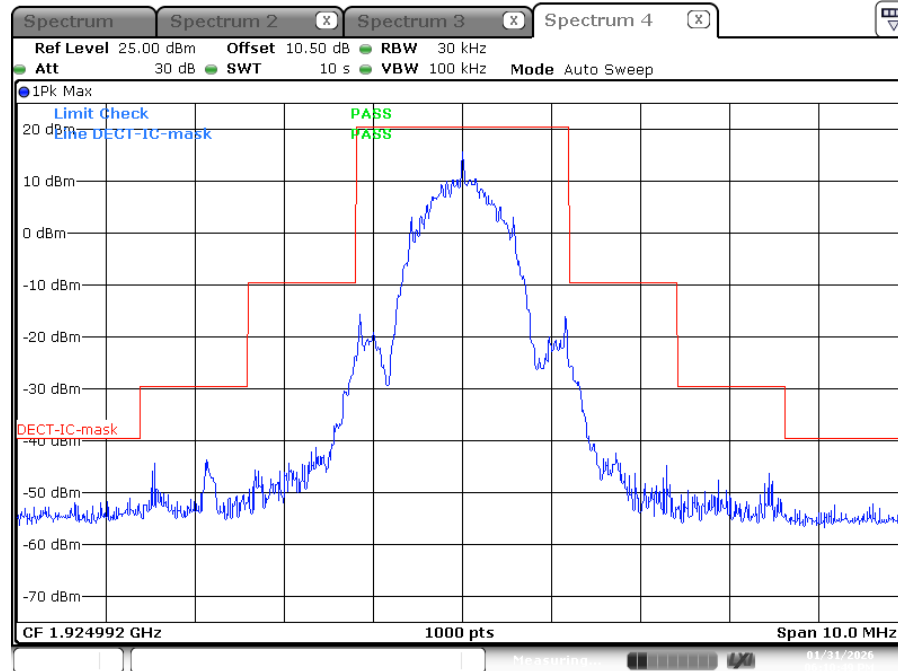Middle Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:10:49

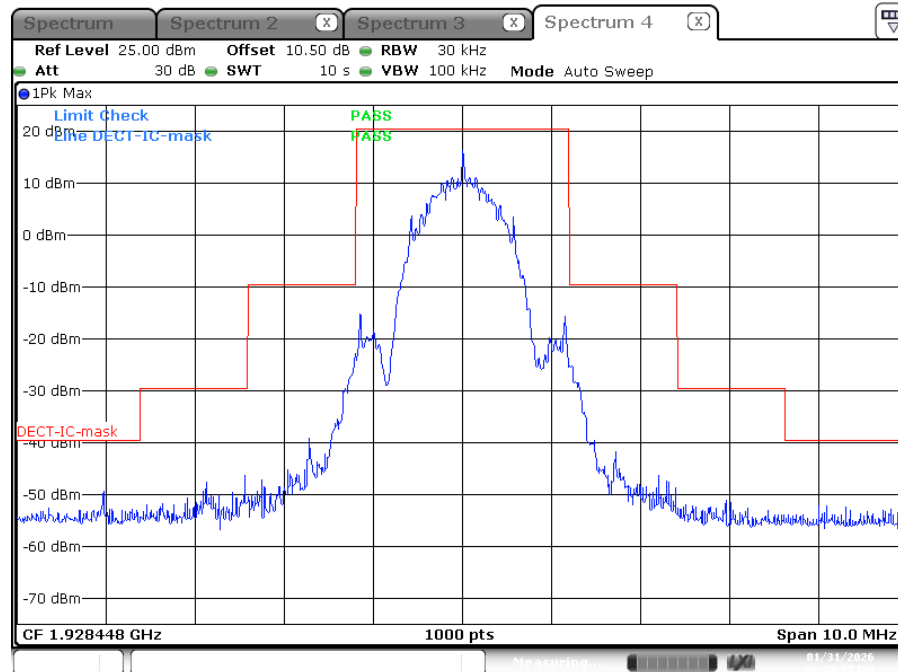
High Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:00:35

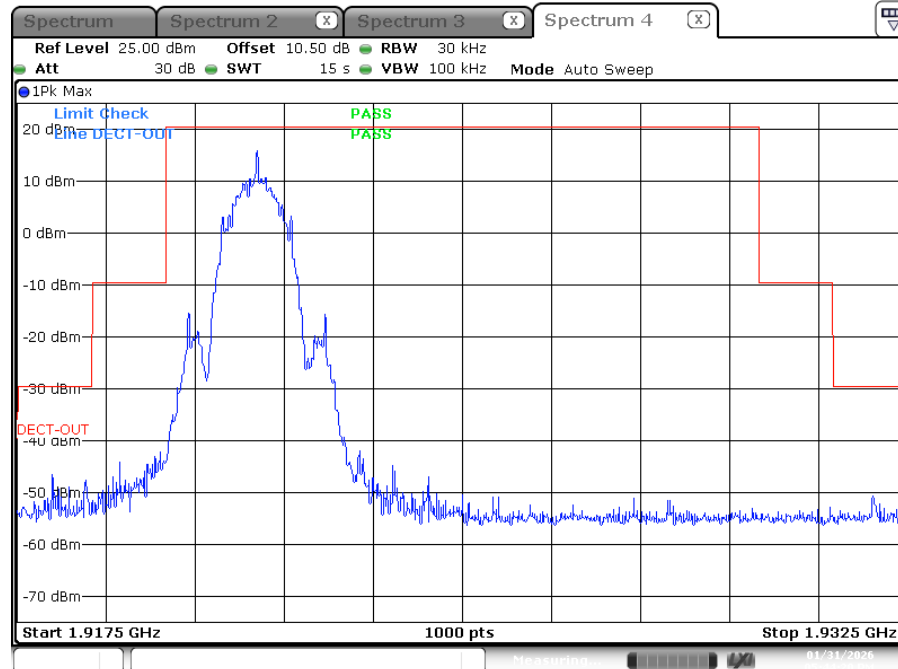Low Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:44:20

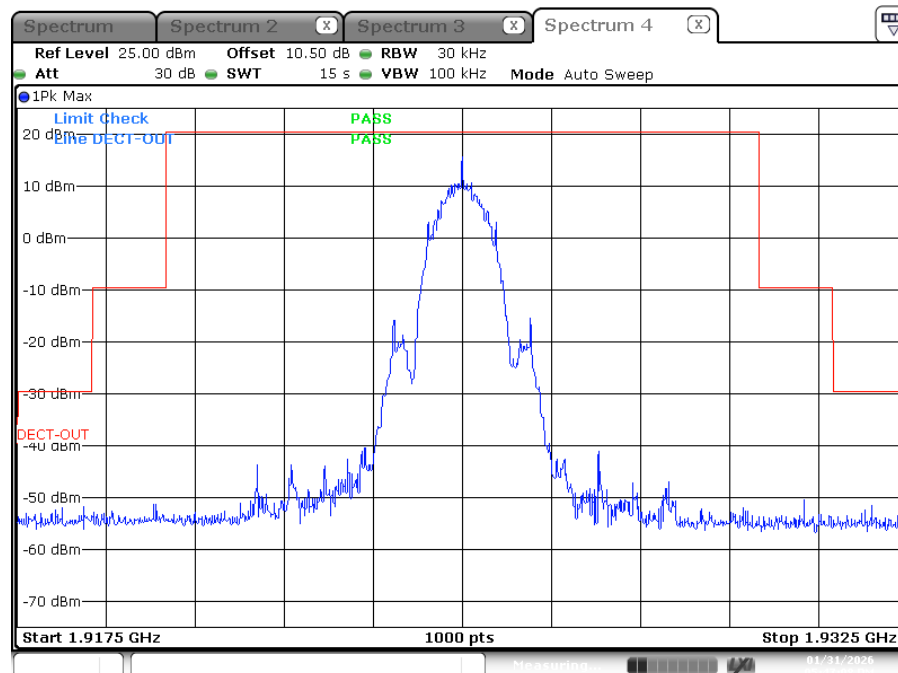Middle Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:47:07


High Channel (Unwanted Emission outside the Sub-band)

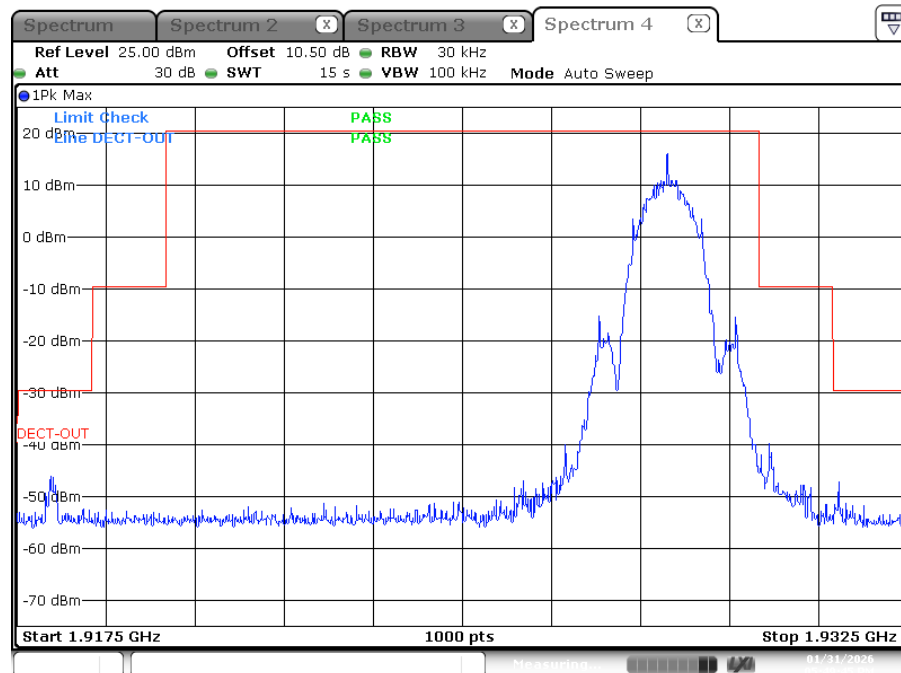


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:49:45

$\pi/2$ -DBPSK:


FCC:

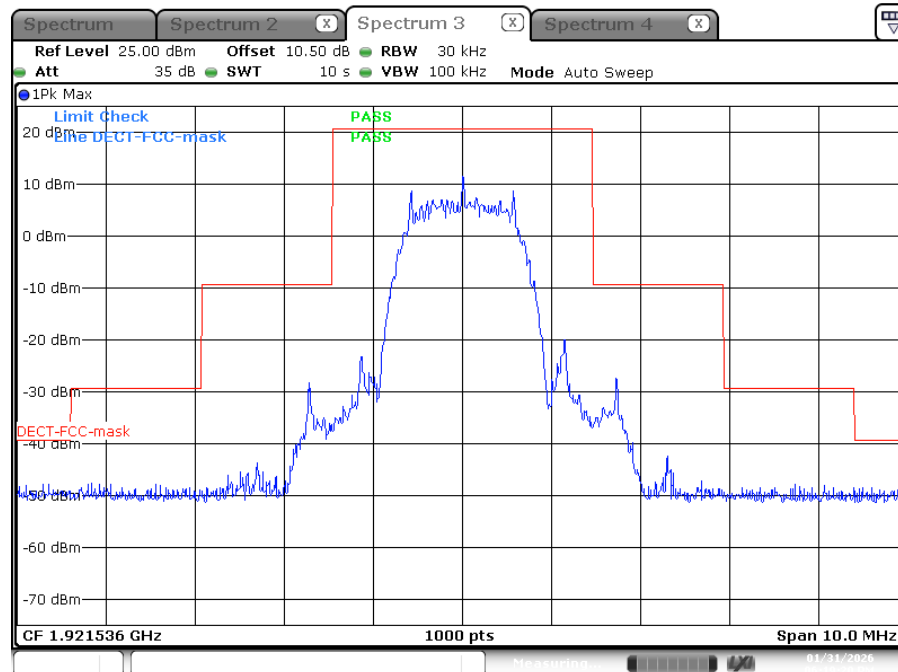Low Channel (Unwanted Emission inside the Sub-band)


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:19:19

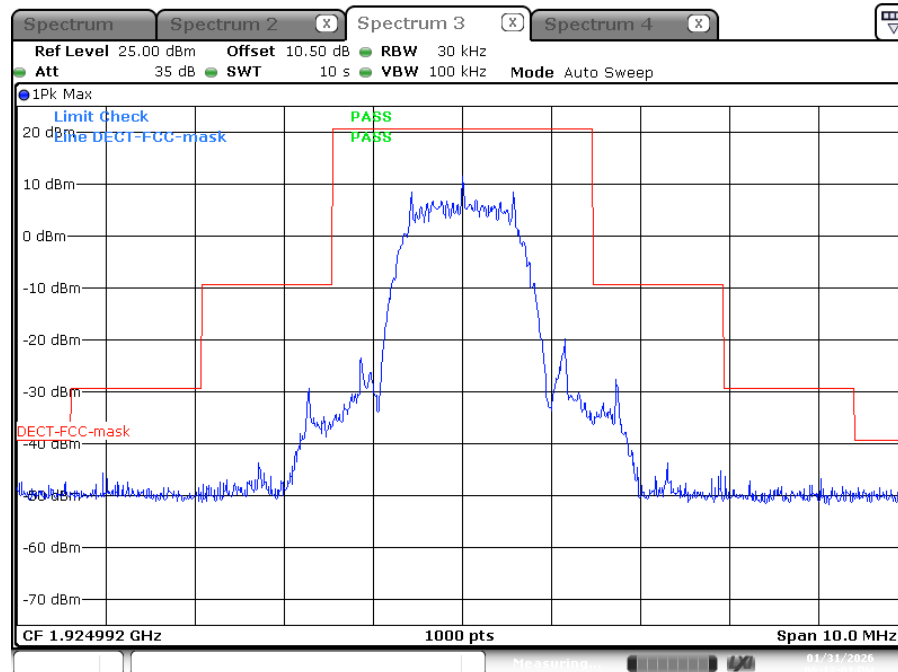Middle Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:12:01

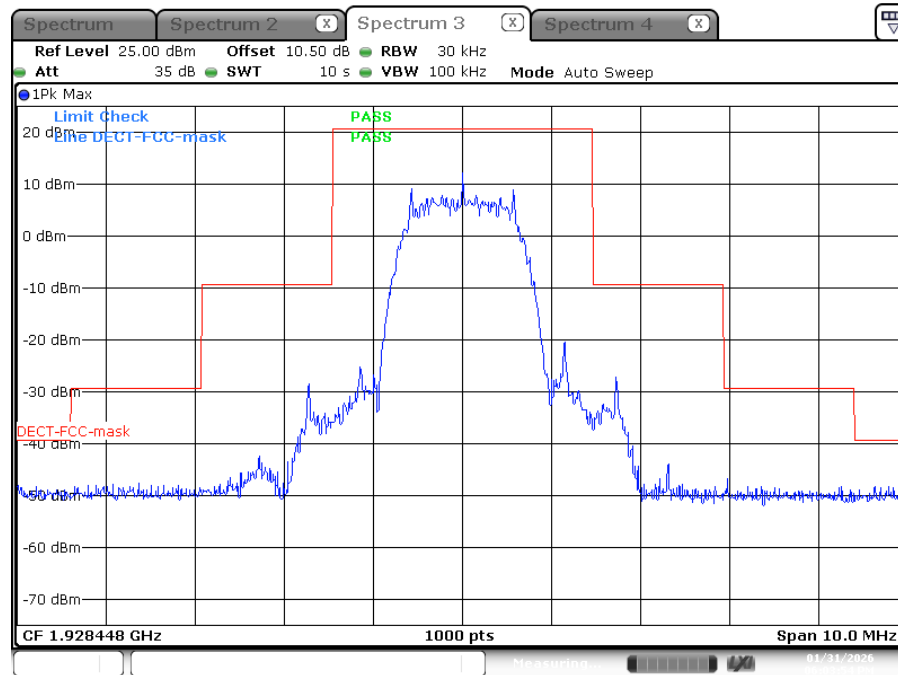
High Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:03:54

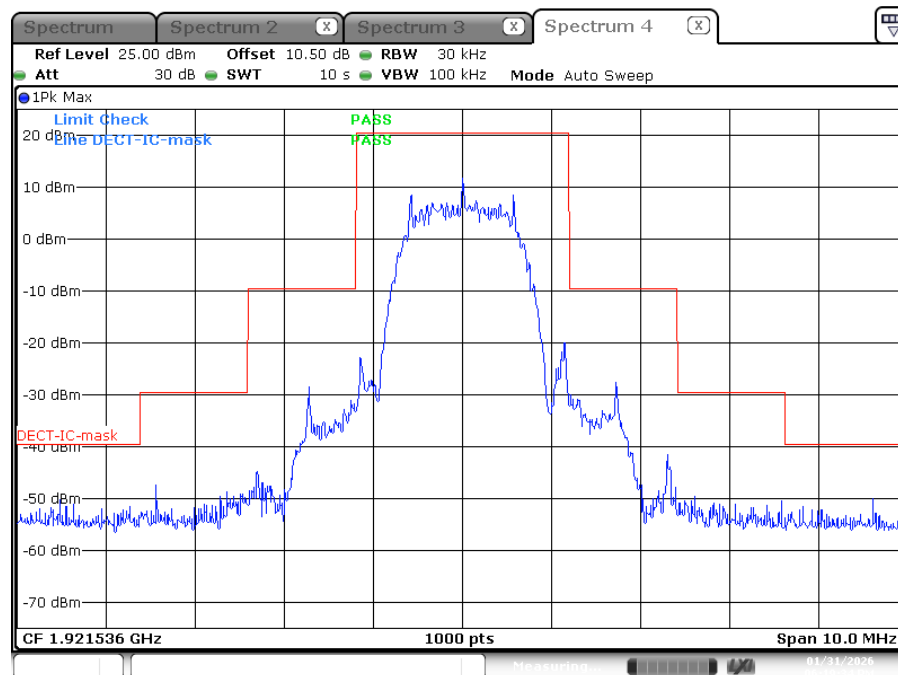ISED:**Low Channel (Unwanted Emission inside the Sub-band)**

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:19:34


Middle Channel (Unwanted Emission inside the Sub-band)

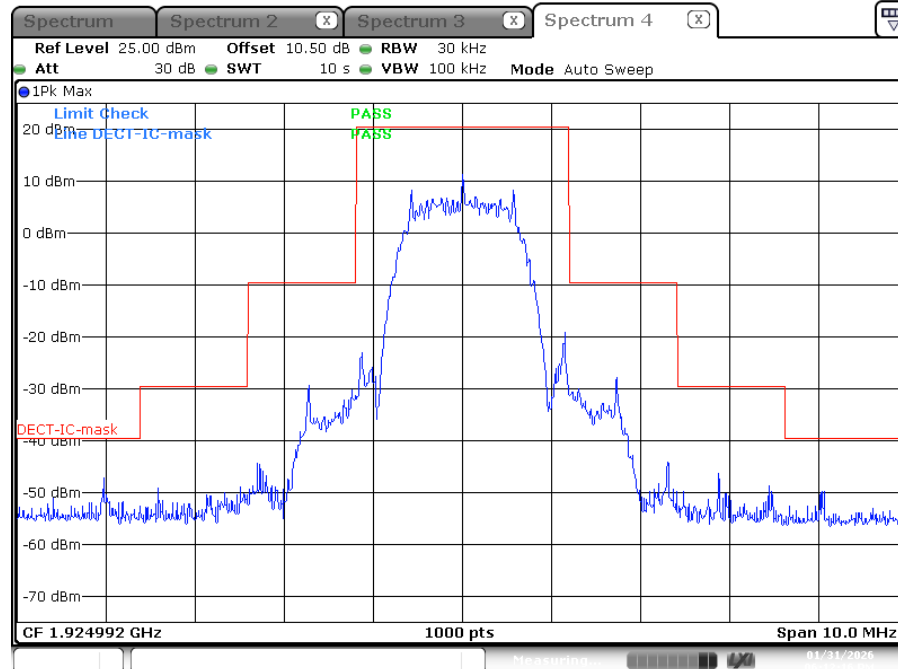

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 18:12:16

High Channel (Unwanted Emission inside the Sub-band)

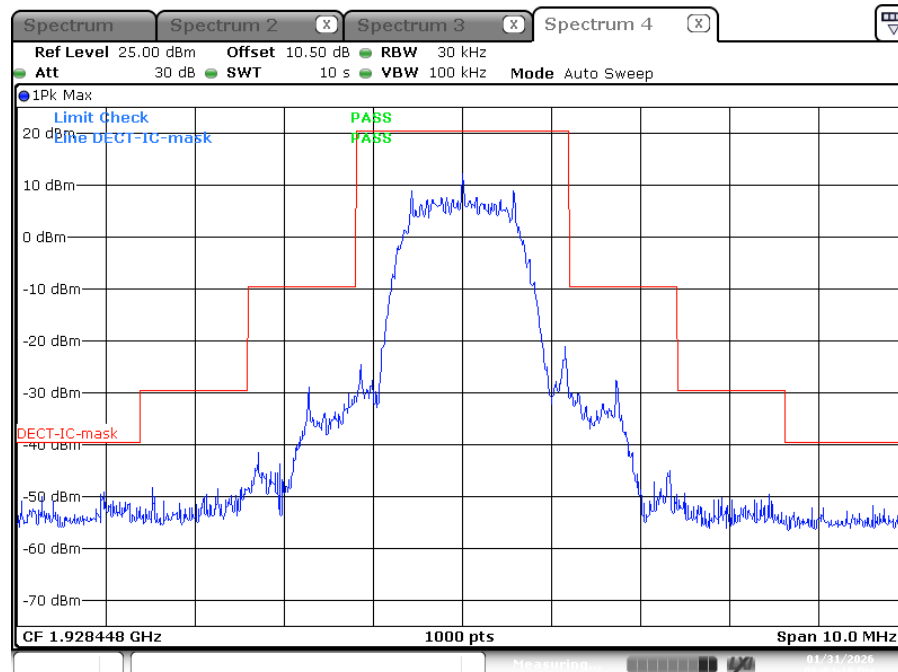


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:04:09

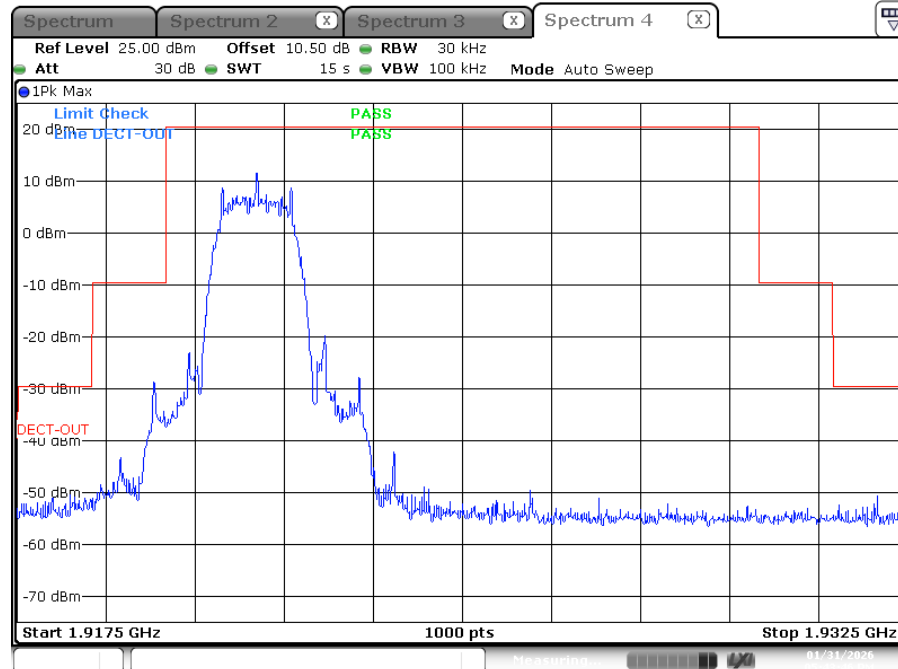Low Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:43:46

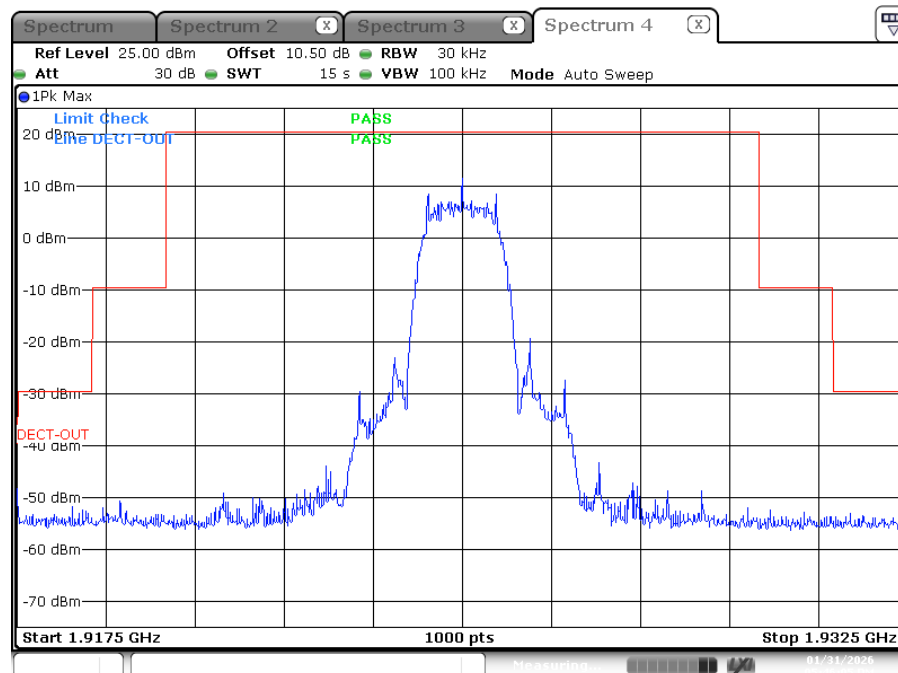Middle Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:46:05

High Channel (Unwanted Emission outside the Sub-band)

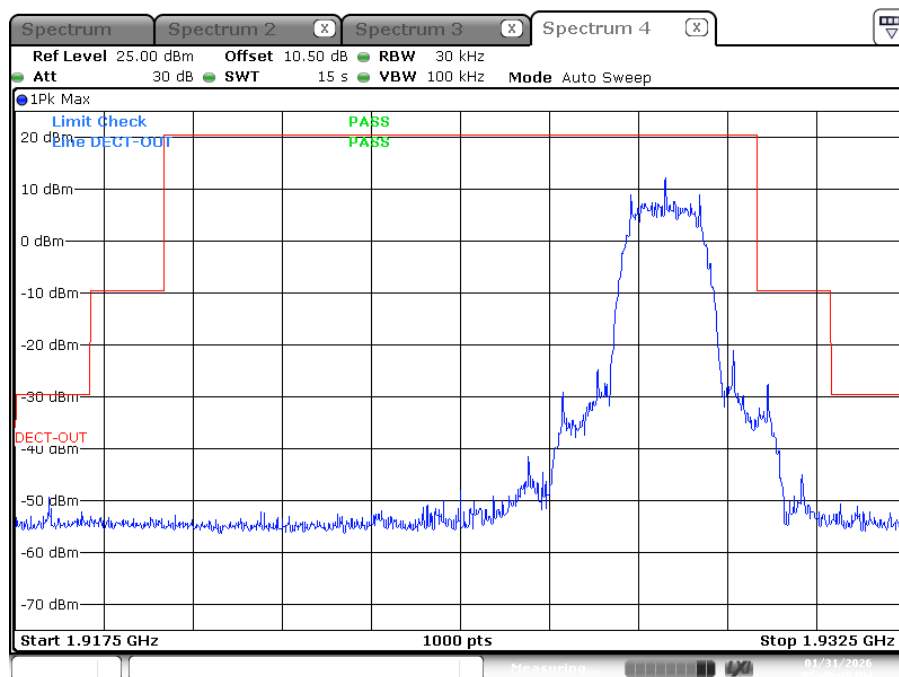


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:48:49

$\pi/4$ -DQPSK:


FCC:

Low Channel (Unwanted Emission inside the Sub-band)

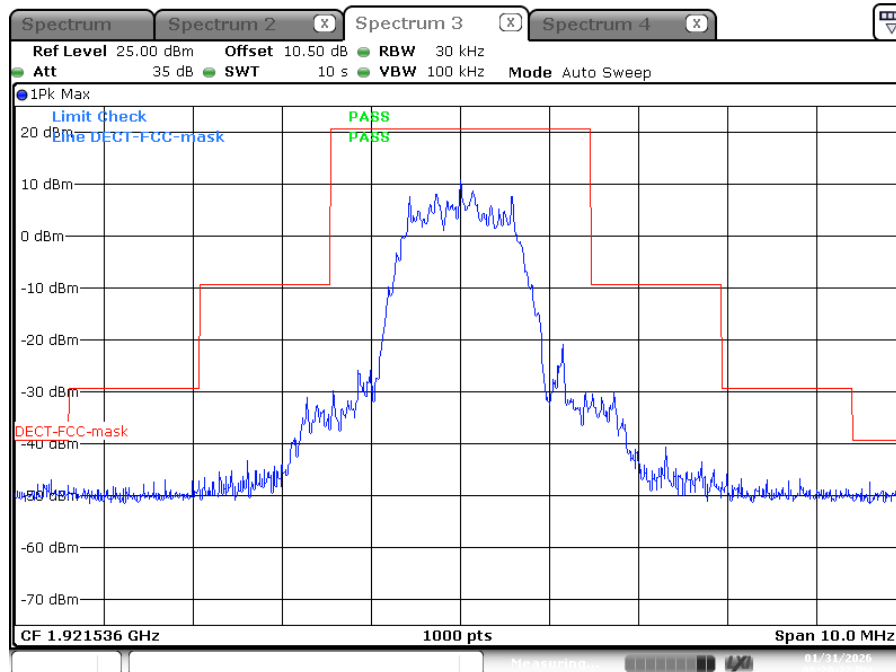


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:20:32


Middle Channel (Unwanted Emission inside the Sub-band)

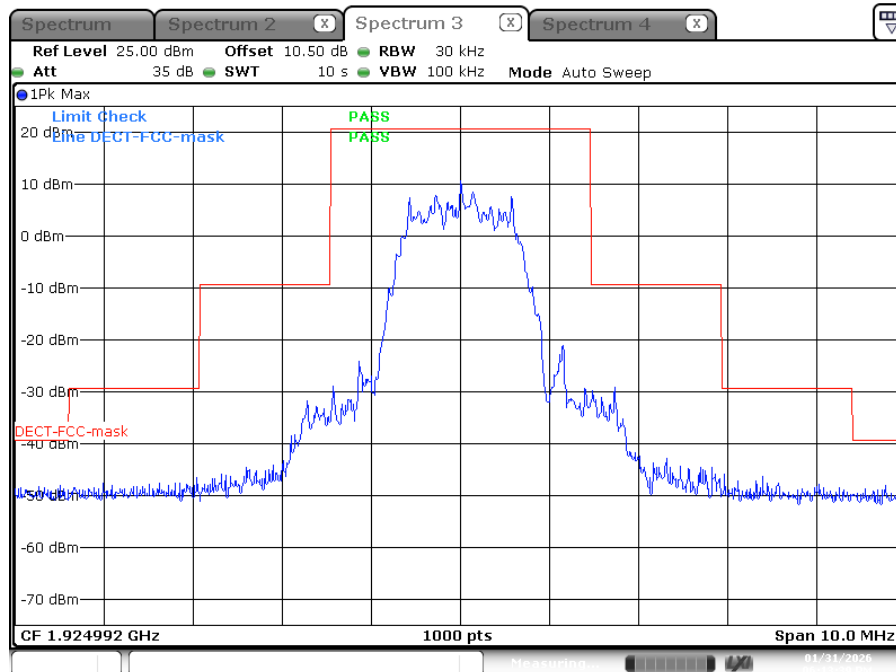

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:13:39

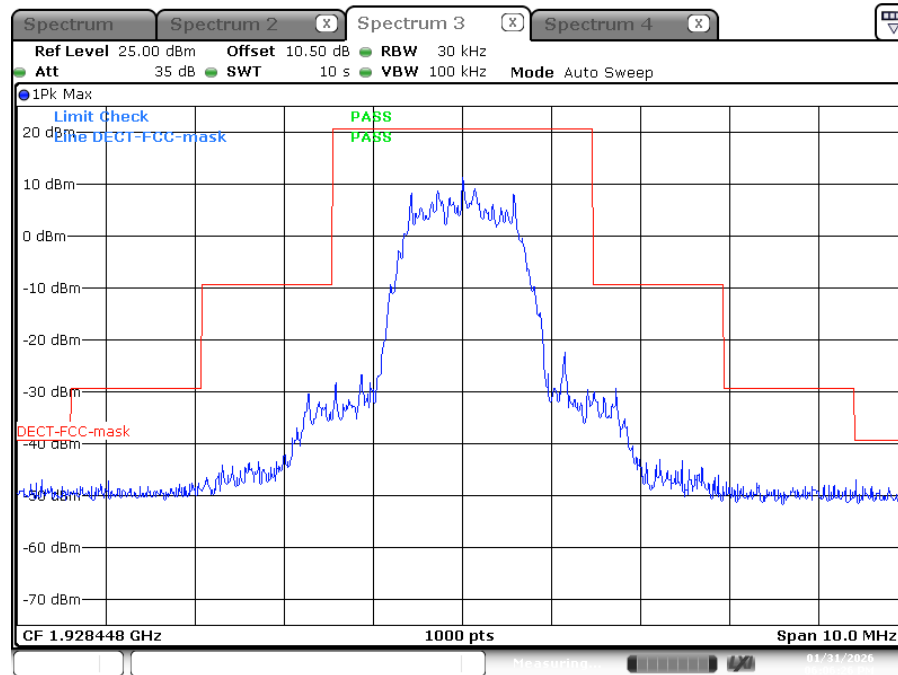
High Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:06:26

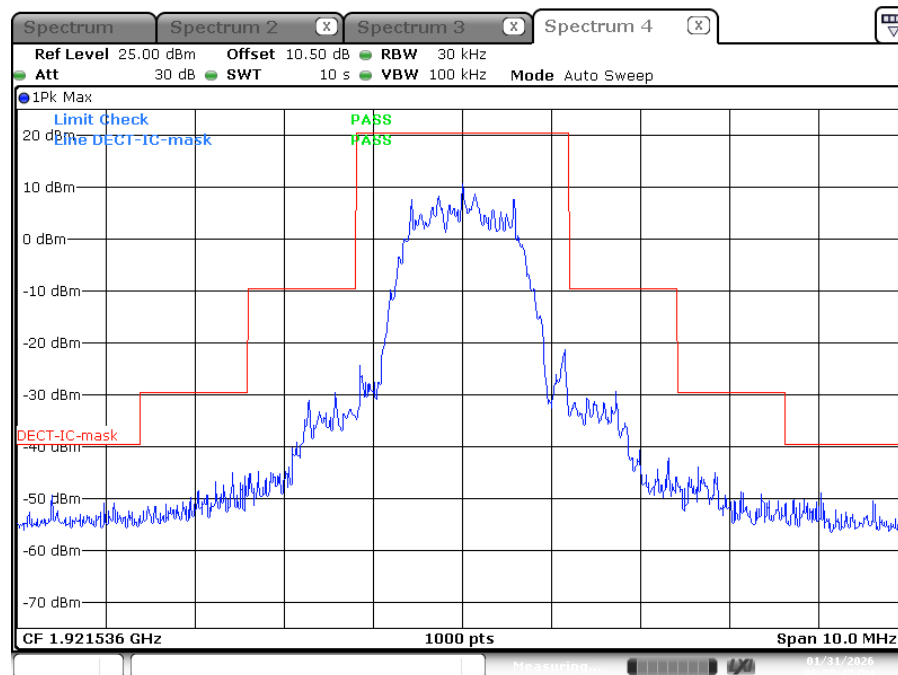ISED:**Low Channel (Unwanted Emission inside the Sub-band)**


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:20:47

Middle Channel (Unwanted Emission inside the Sub-band)

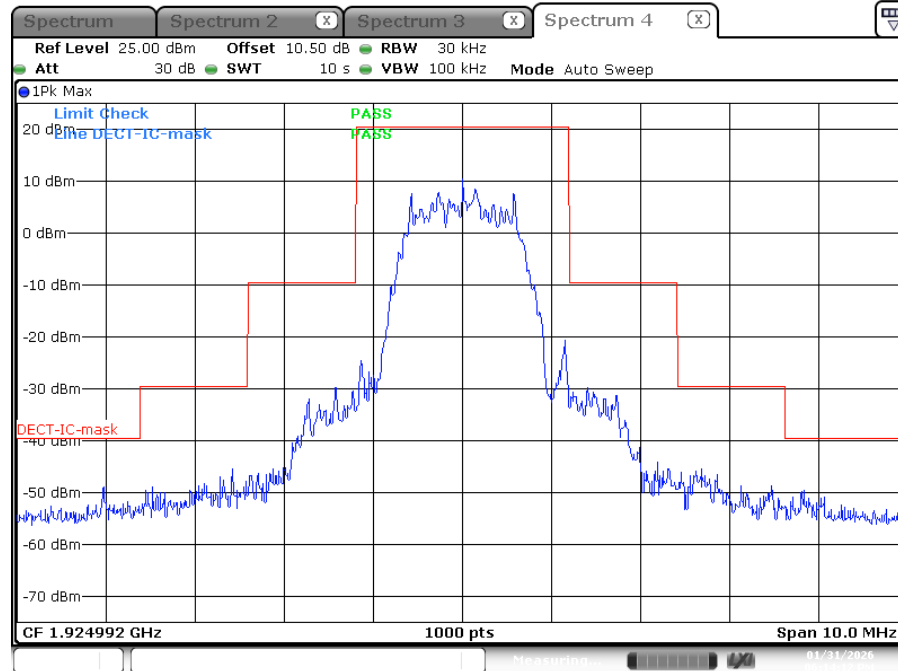


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:14:12

High Channel (Unwanted Emission inside the Sub-band)

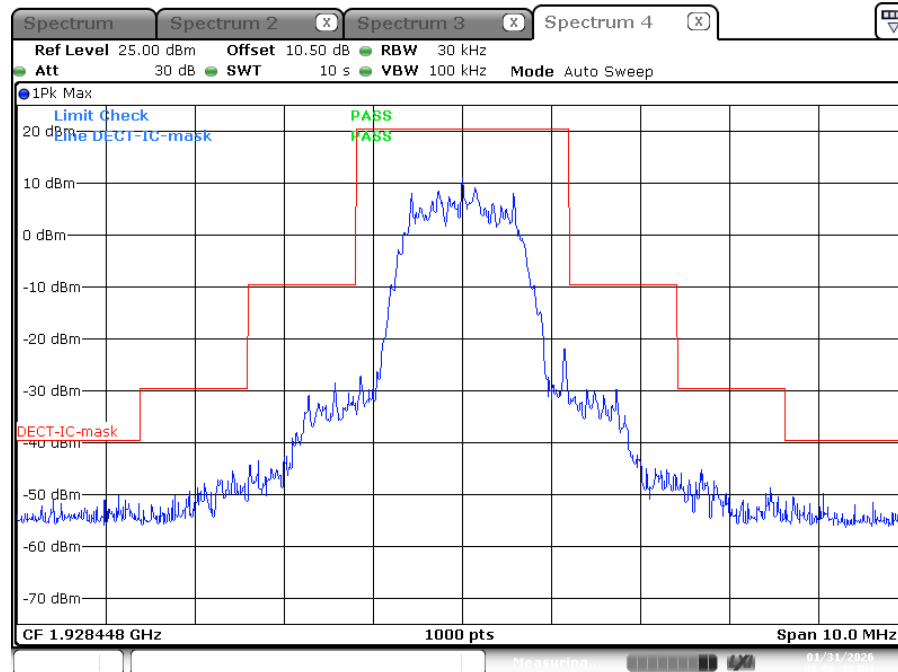


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:06:42

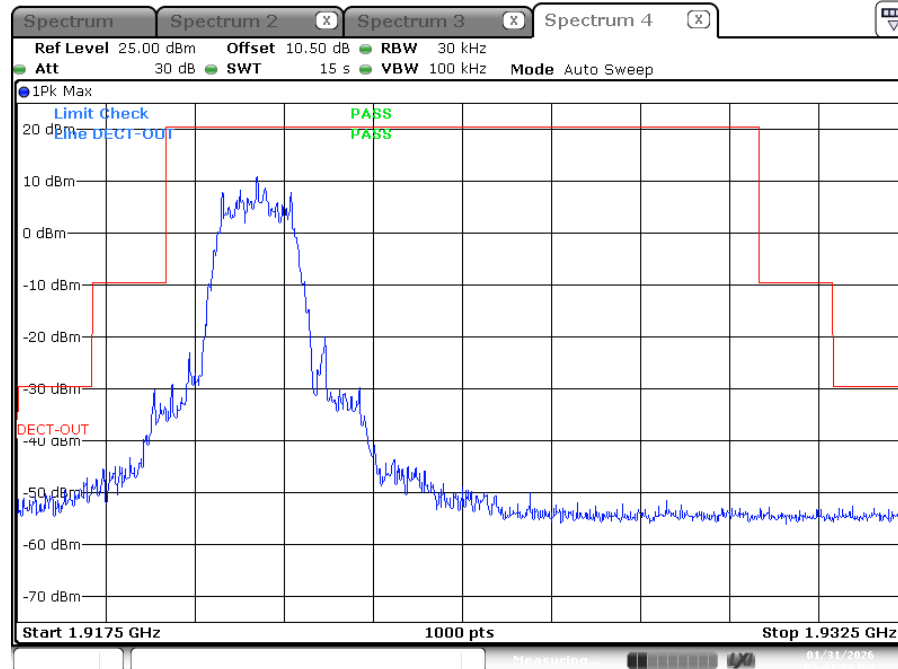Low Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 17:41:24

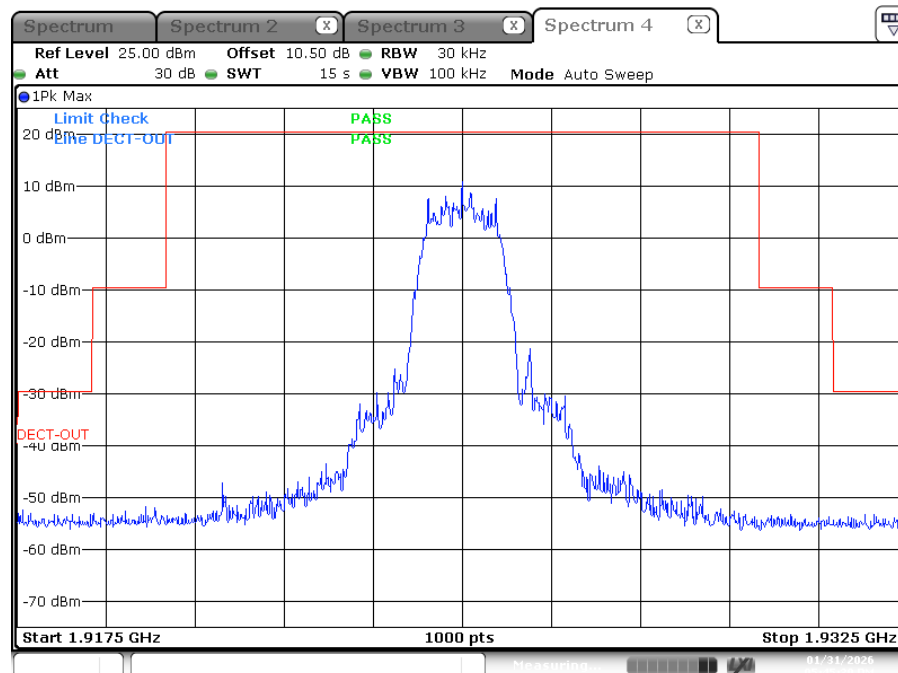Middle Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 17:45:38

High Channel (Unwanted Emission outside the Sub-band)

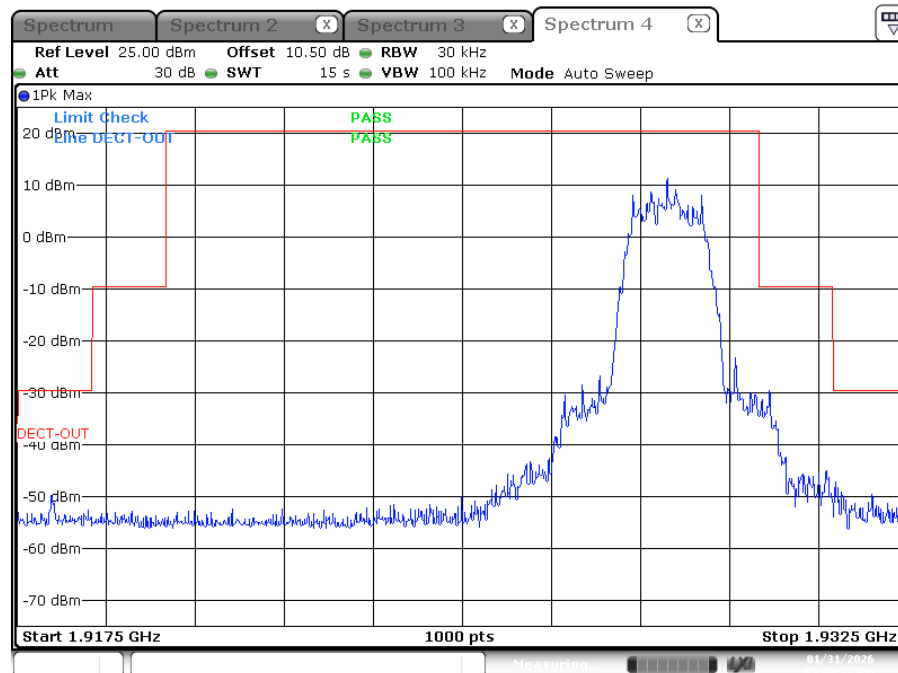


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:48:21

$\pi/8$ -D8PSK:


FCC:

Low Channel (Unwanted Emission inside the Sub-band)

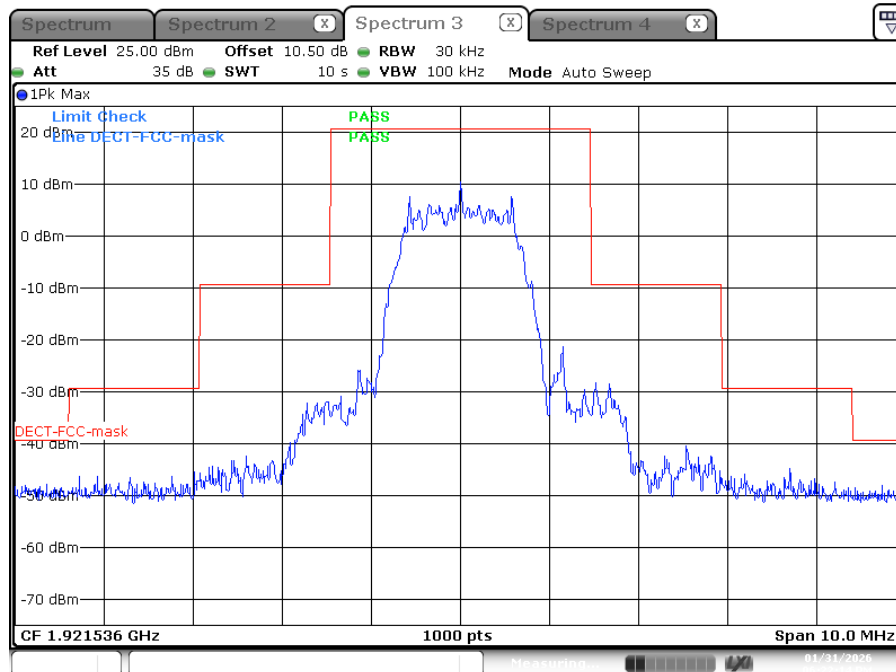


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:22:14


Middle Channel (Unwanted Emission inside the Sub-band)

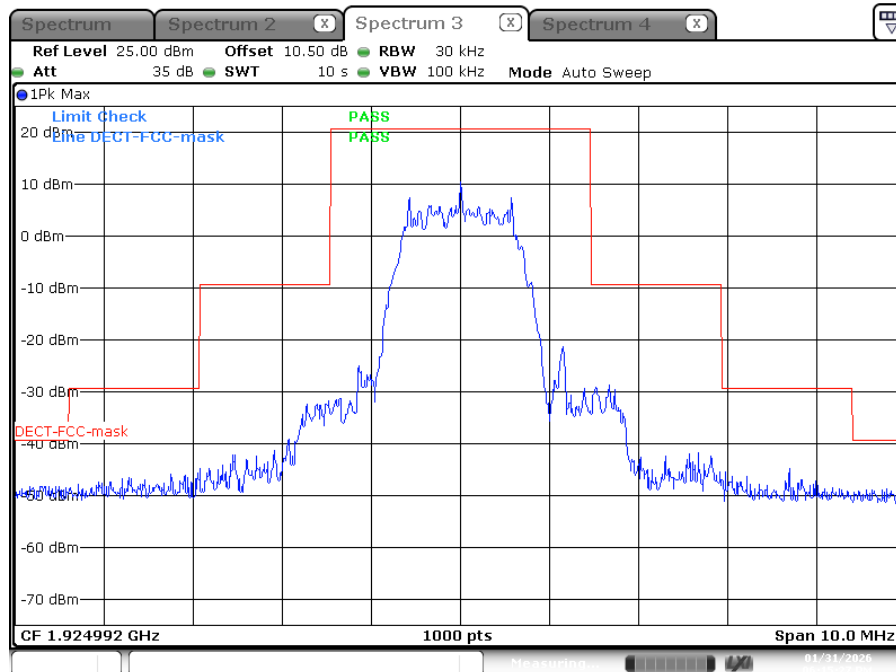


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:15:27

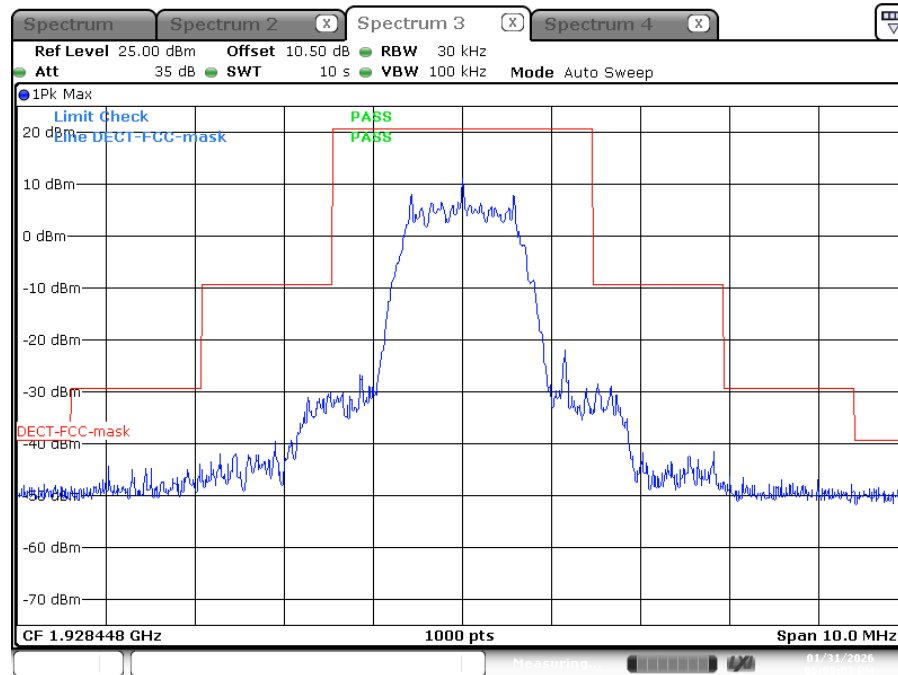High Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:08:02

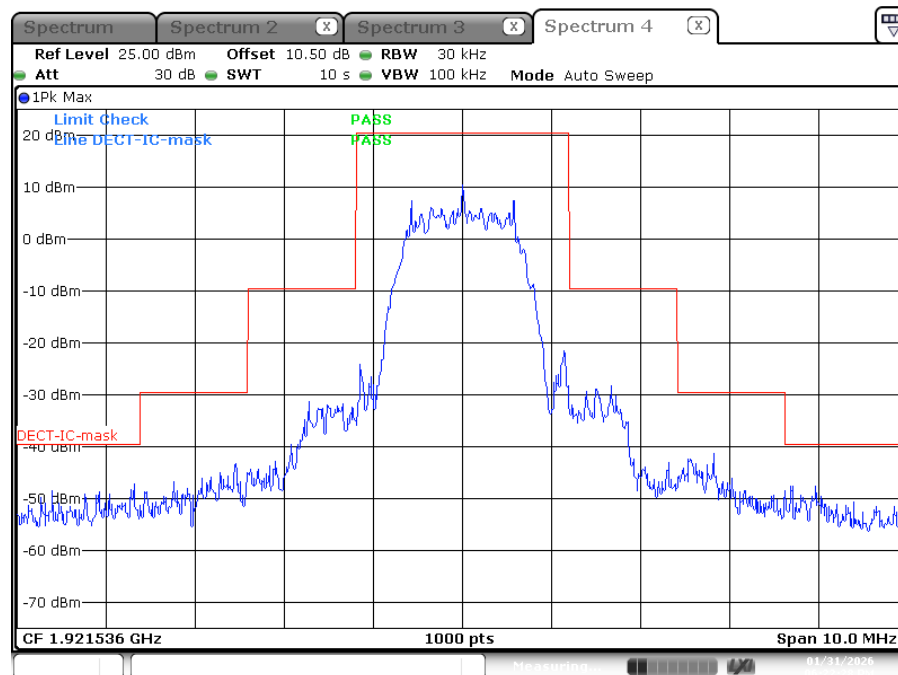
ISED:**Low Channel (Unwanted Emission inside the Sub-band)**

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 18:22:28

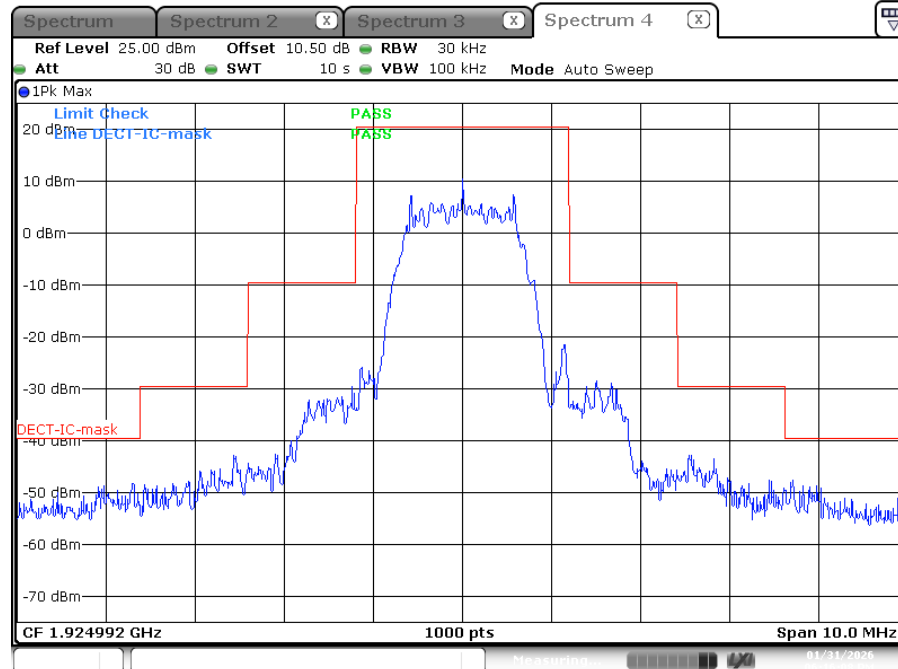Middle Channel (Unwanted Emission inside the Sub-band)


ProjectNo.:2501A92967E-RF Tester:Cheeb Huang

Date: 31.JAN.2026 18:16:08

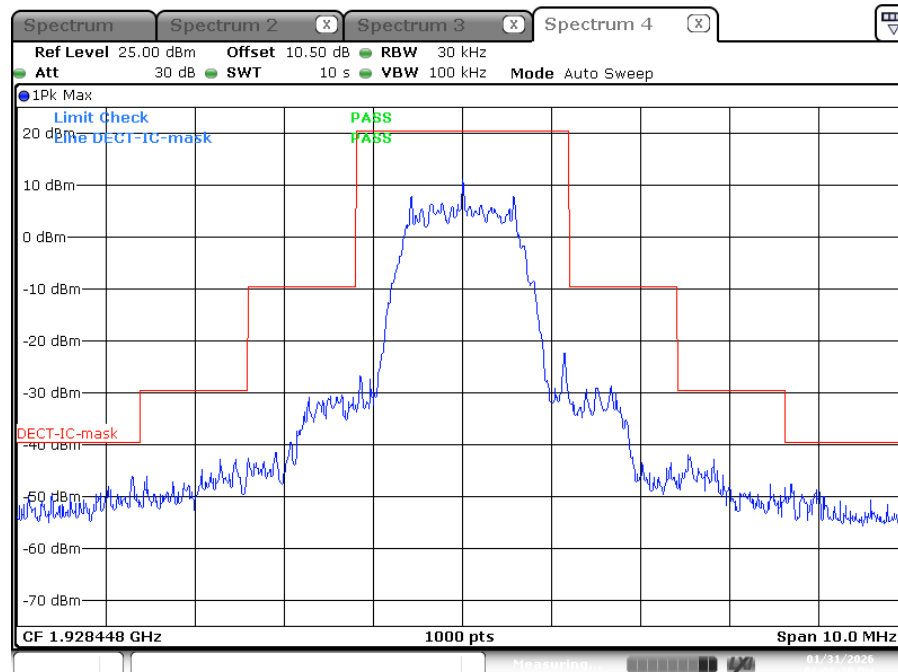
High Channel (Unwanted Emission inside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang


Date: 31.JAN.2026 18:08:30

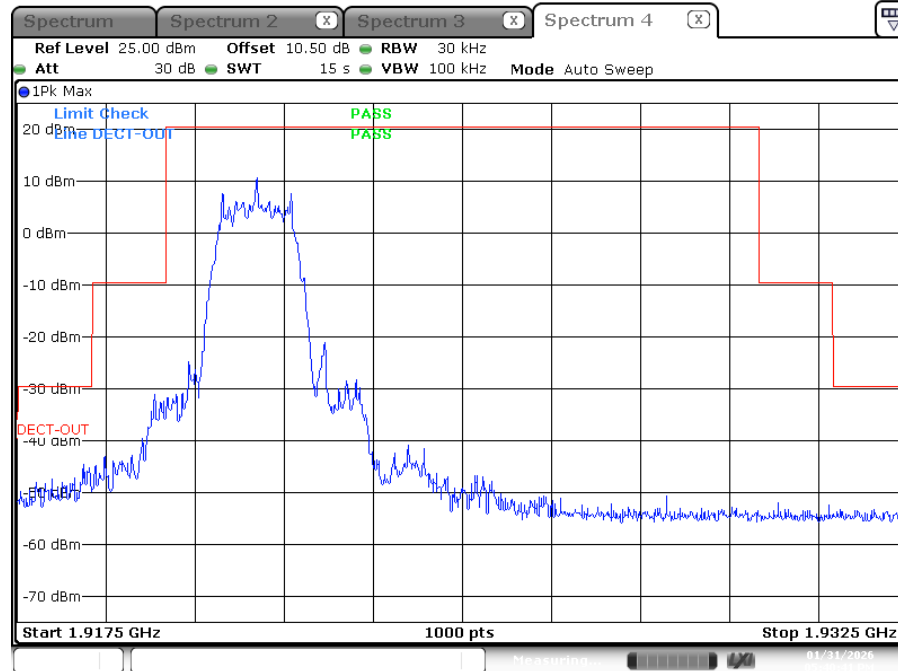Low Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:40:41

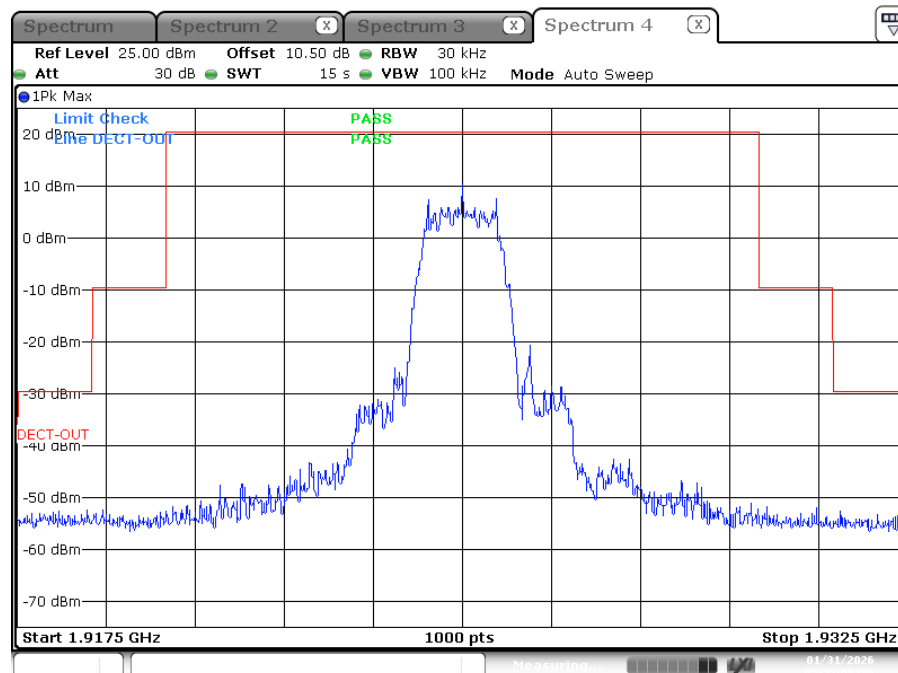Middle Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:45:05

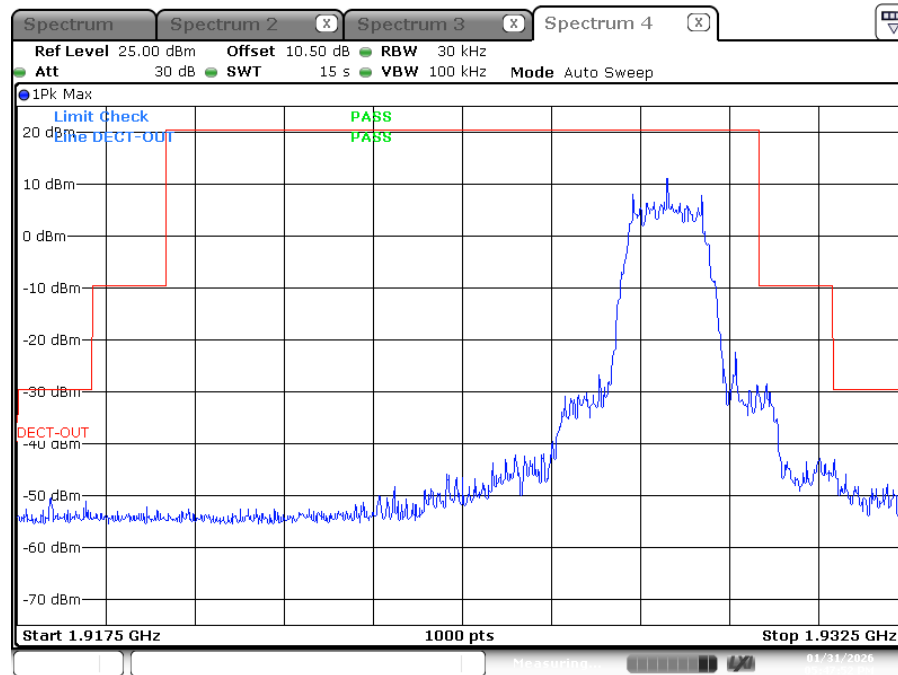High Channel (Unwanted Emission outside the Sub-band)

ProjectNo.:2501A92967E-RF Tester:Cheeb Huang
Date: 31.JAN.2026 17:47:52

Note: In the region at 2.5 MHz or greater below and above the lower and upper band edges, please refer to the section of Radiated Emissions.

Radiated spurious emission:


Note:

1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded.
2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.
3. The spurious emission from 9 kHz-30MHz of IC RSS-213 standard, the unit of final result on the test plots are dBμV/m, so the limit should be added by 51,5 dB from dBμA/m to dBμV/m.
4. For the radiated spurious emission above 1GHz, only the worst case (POE power supply) was recorded.

Adapter:


ANT1 (Maximum output power mode: GFSK High Channel)

9 kHz-30MHz:

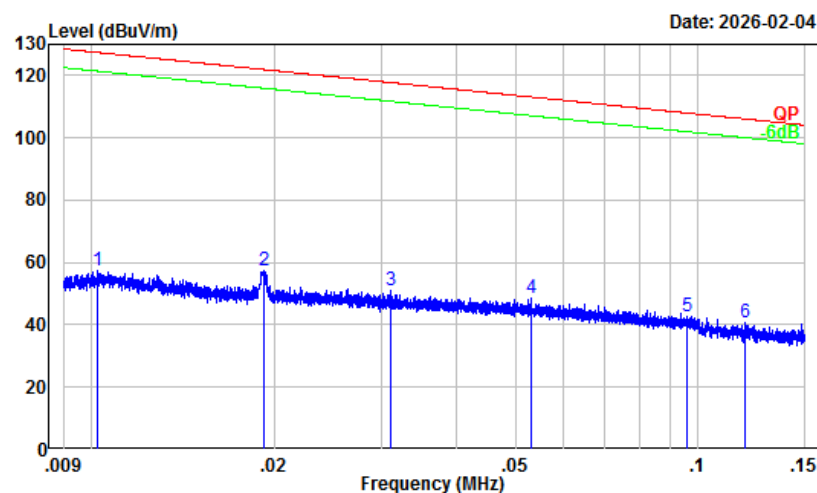


Site : Chamber A
 Condition : 3m
 Project Number : 2501A92967E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 0.3/1kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dB	
1	0.010	32.26	25.20	57.46	127.42	-69.96 Peak
2	0.019	30.54	26.83	57.37	121.92	-64.55 Peak
3	0.031	28.38	22.82	51.20	117.75	-66.55 Peak
4	0.053	26.09	22.39	48.48	113.11	-64.63 Peak
5	0.096	22.28	20.50	42.78	107.96	-65.18 Peak
6	0.120	20.84	19.79	40.63	106.05	-65.42 Peak

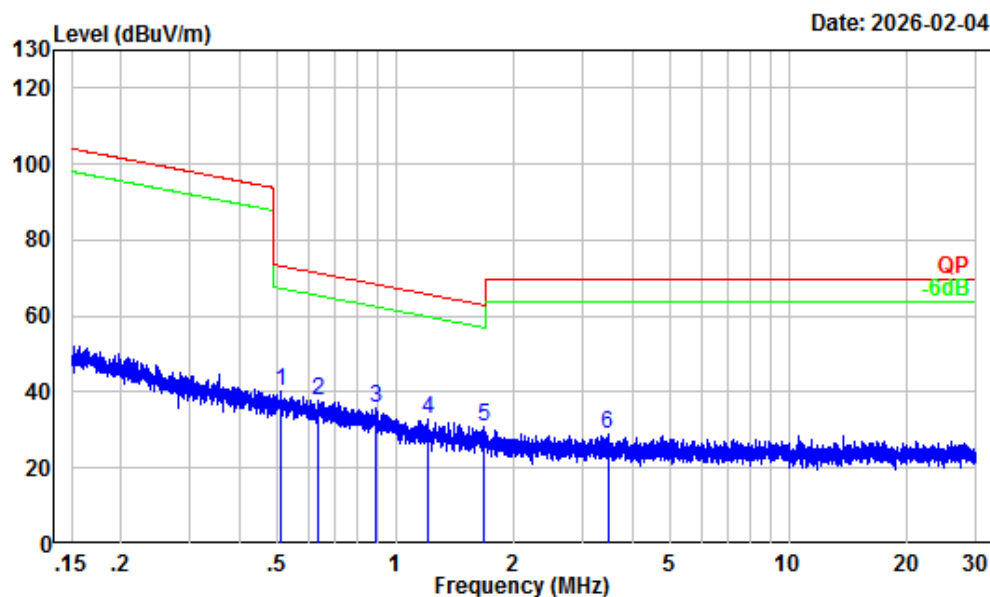

Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.508	6.30	33.89	40.19	73.47	-33.28	Peak
2	0.636	4.72	32.99	37.71	71.49	-33.78	Peak
3	0.896	1.98	33.74	35.72	68.45	-32.73	Peak
4	1.215	0.60	32.07	32.67	65.75	-33.08	Peak
5	1.675	-0.69	31.58	30.89	62.90	-32.01	Peak
6	3.468	-2.41	31.19	28.78	69.54	-40.76	Peak

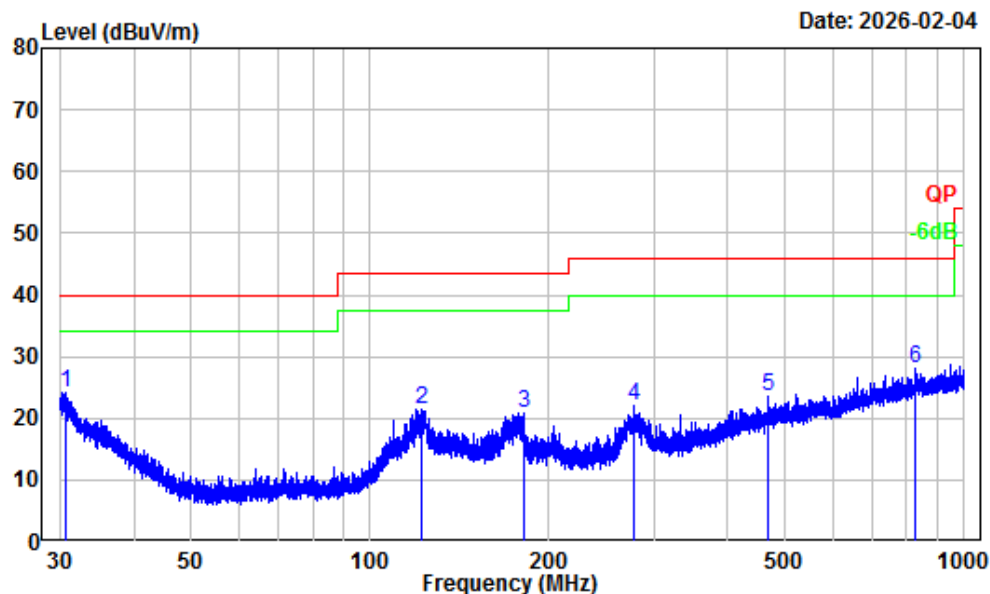30MHz-1GHz:**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.79	-6.36	30.55	24.19	40.00	-15.81	Peak
2	121.71	-11.27	32.84	21.57	43.50	-21.93	Peak
3	181.28	-13.74	34.57	20.83	43.50	-22.67	Peak
4	278.80	-11.26	33.37	22.11	46.00	-23.89	Peak
5	467.64	-6.86	30.29	23.43	46.00	-22.57	Peak
6	825.68	-1.94	30.16	28.22	46.00	-17.78	Peak

Vertical

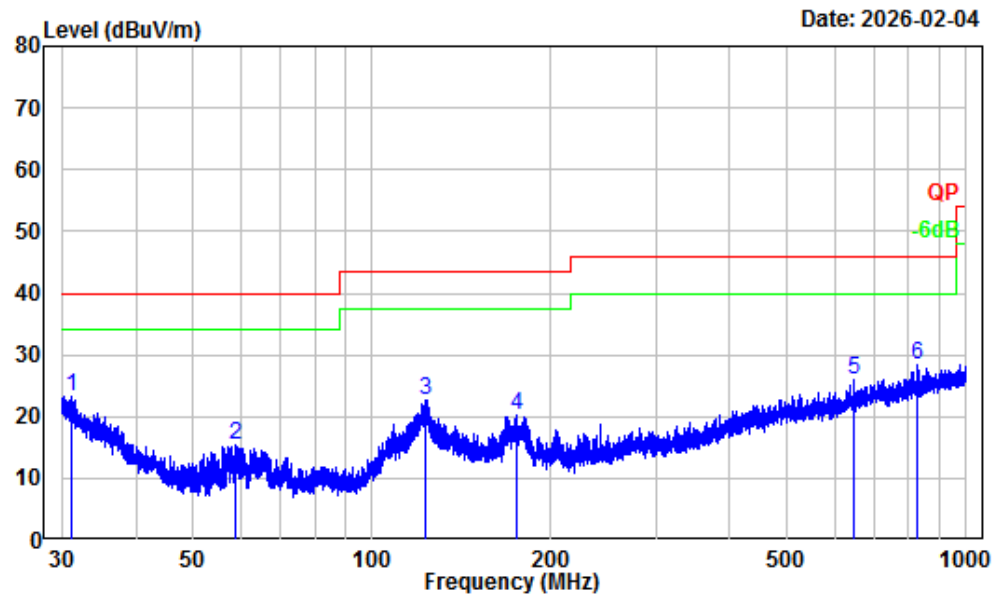


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.25	-6.62	29.79	23.17	40.00	-16.83	Peak
2	58.95	-18.21	33.50	15.29	40.00	-24.71	Peak
3	123.00	-11.14	33.70	22.56	43.50	-20.94	Peak
4	174.65	-13.38	33.50	20.12	43.50	-23.38	Peak
5	645.97	-4.21	30.07	25.86	46.00	-20.14	Peak
6	829.67	-1.94	30.30	28.36	46.00	-17.64	Peak


ANT2 (Maximum output power mode: GFSK High Channel)

9 kHz-30MHz:

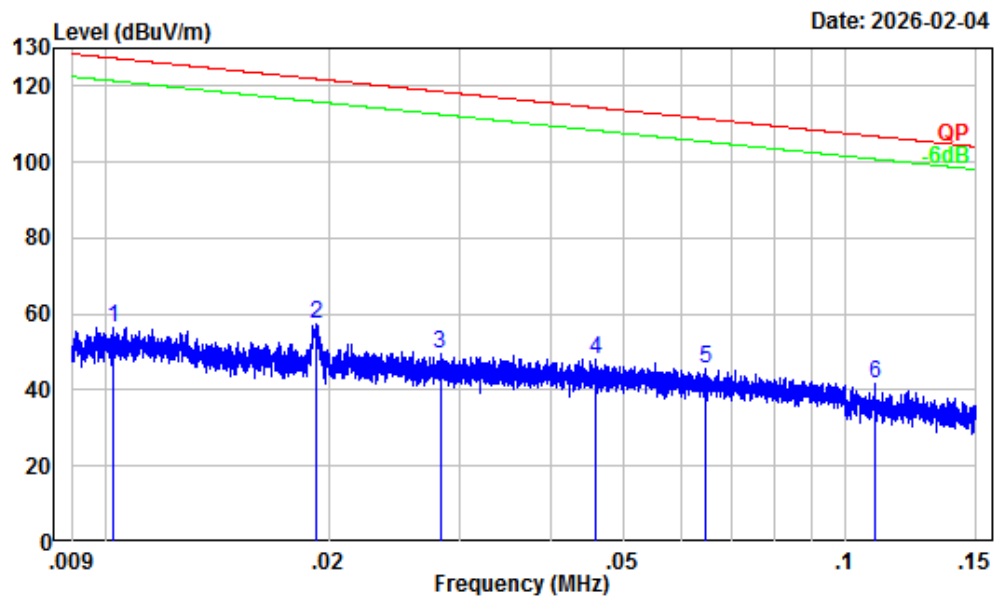


Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.26	23.97	56.23	127.42	-71.19	Peak
2	0.019	30.55	26.92	57.47	121.93	-64.46	Peak
3	0.028	28.82	20.77	49.59	118.56	-68.97	Peak
4	0.046	26.83	21.48	48.31	114.37	-66.06	Peak
5	0.065	24.94	20.92	45.86	111.40	-65.54	Peak
6	0.110	21.43	20.08	41.51	106.80	-65.29	Peak

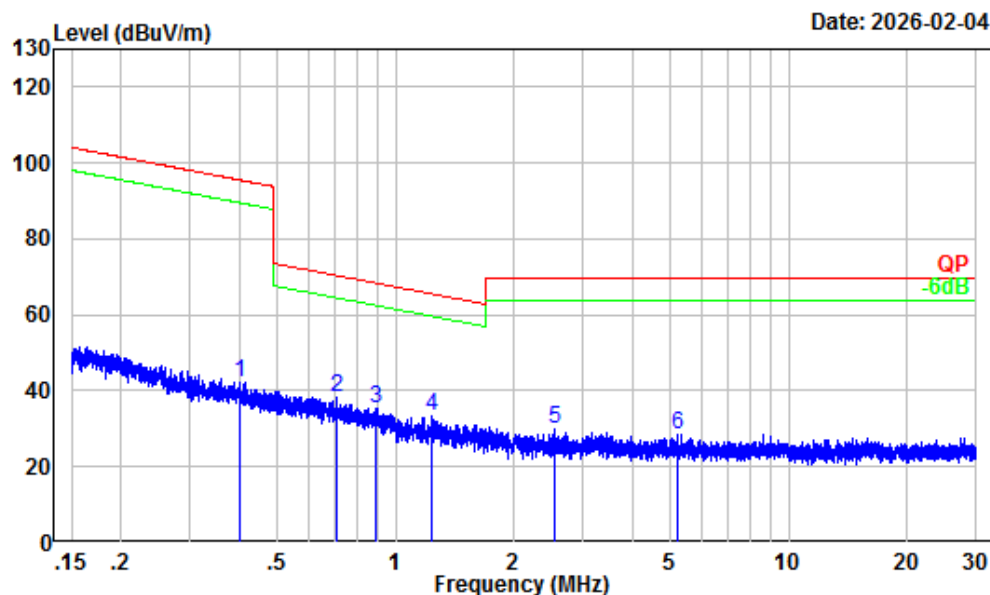

Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.401	8.28	34.12	42.40	95.55	-53.15	Peak
2	0.710	3.81	34.63	38.44	70.51	-32.07	Peak
3	0.891	2.02	33.22	35.24	68.50	-33.26	Peak
4	1.241	0.52	32.73	33.25	65.55	-32.30	Peak
5	2.540	-1.90	31.94	30.04	69.54	-39.50	Peak
6	5.204	-2.82	31.29	28.47	69.54	-41.07	Peak

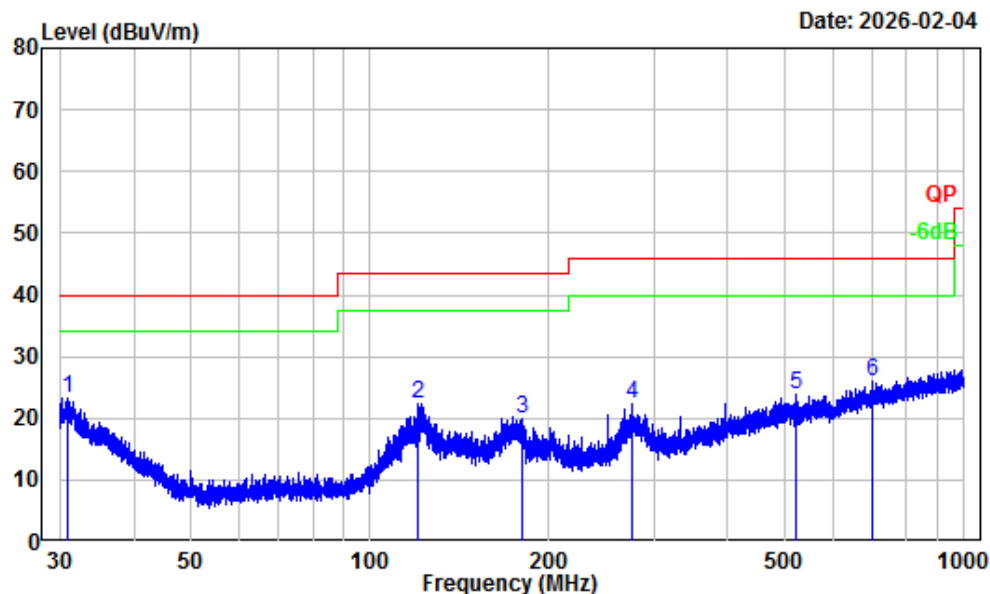30MHz-1GHz:**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.03	-6.49	29.69	23.20	40.00	-16.80	Peak
2	120.22	-11.43	33.85	22.42	43.50	-21.08	Peak
3	180.57	-13.68	33.74	20.06	43.50	-23.44	Peak
4	275.28	-11.33	33.70	22.37	46.00	-23.63	Peak
5	519.29	-5.88	29.59	23.71	46.00	-22.29	Peak
6	702.68	-3.46	29.46	26.00	46.00	-20.00	Peak

Vertical

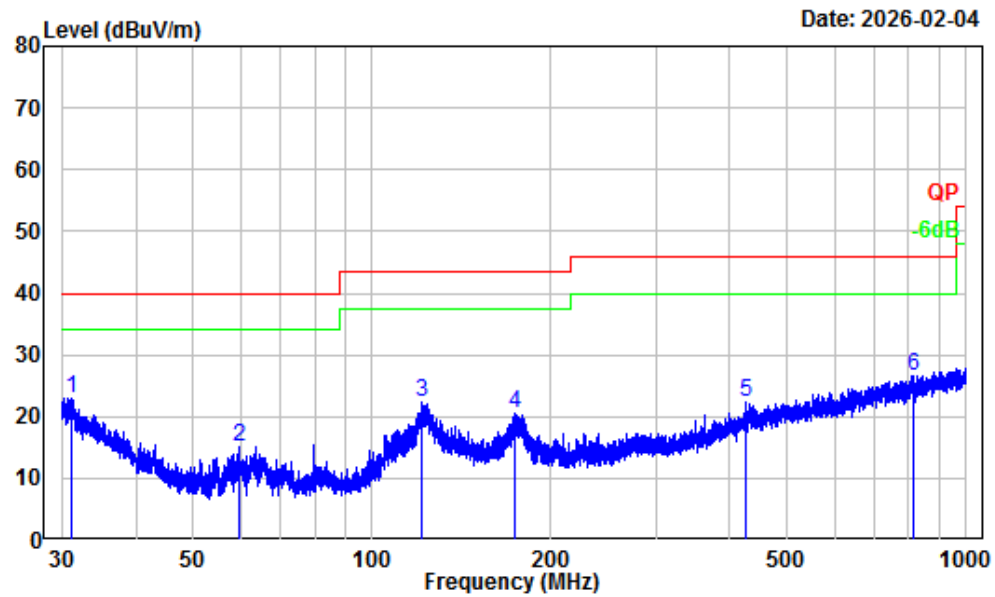


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.26	-6.63	29.67	23.04	40.00	-16.96	Peak
2	59.75	-18.14	33.20	15.06	40.00	-24.94	Peak
3	121.34	-11.32	33.66	22.34	43.50	-21.16	Peak
4	174.35	-13.38	33.86	20.48	43.50	-23.02	Peak
5	427.08	-7.85	30.27	22.42	46.00	-23.58	Peak
6	818.12	-2.03	28.72	26.69	46.00	-19.31	Peak


POE:

ANT1 (Maximum output power mode: GFSK High Channel)

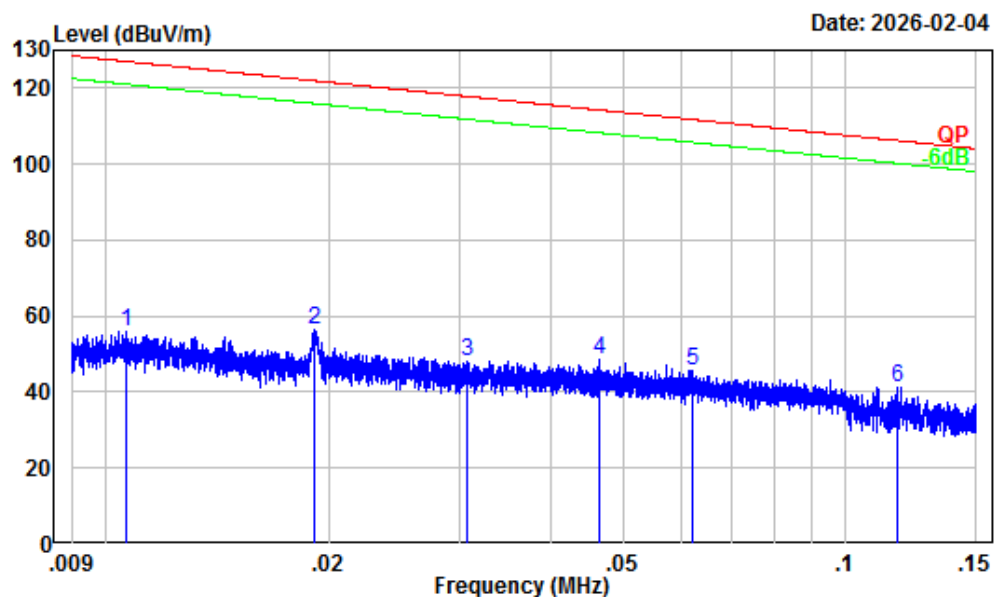9 kHz-30MHz:

Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.18	23.74	55.92	127.06	-71.14	Peak
2	0.019	30.56	25.62	56.18	121.95	-65.77	Peak
3	0.031	28.41	19.65	48.06	117.82	-69.76	Peak
4	0.047	26.77	21.81	48.58	114.25	-65.67	Peak
5	0.062	25.20	20.56	45.76	111.75	-65.99	Peak
6	0.117	20.97	20.15	41.12	106.21	-65.09	Peak

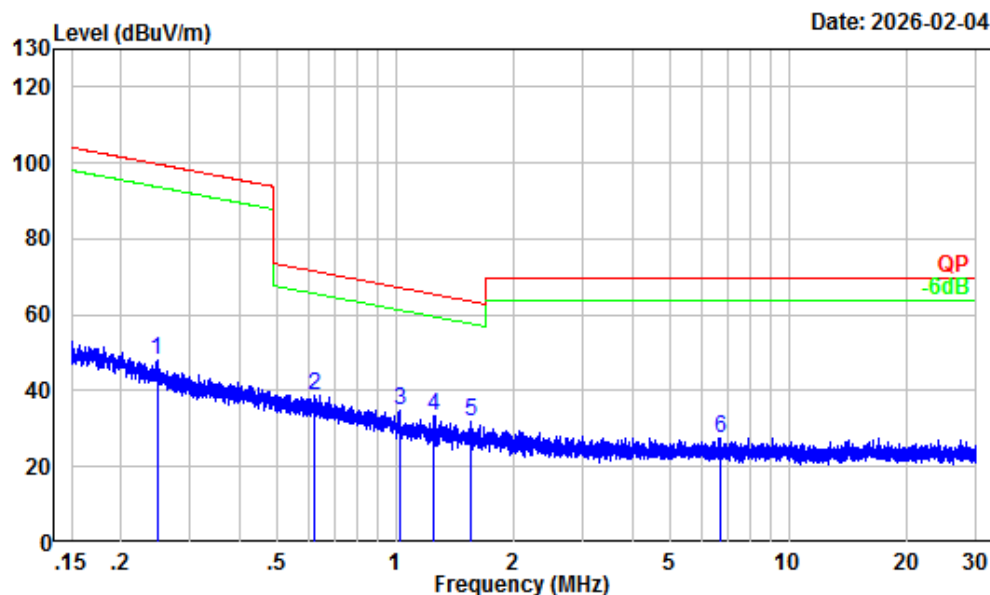


Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.247	13.31	34.88	48.19	99.74	-51.55	Peak
2	0.624	4.87	33.95	38.82	71.66	-32.84	Peak
3	1.022	1.14	33.47	34.61	67.28	-32.67	Peak
4	1.256	0.48	32.78	33.26	65.45	-32.19	Peak
5	1.552	-0.35	32.35	32.00	63.57	-31.57	Peak
6	6.680	-2.93	30.60	27.67	69.54	-41.87	Peak

30MHz-1GHz:


Horizontal

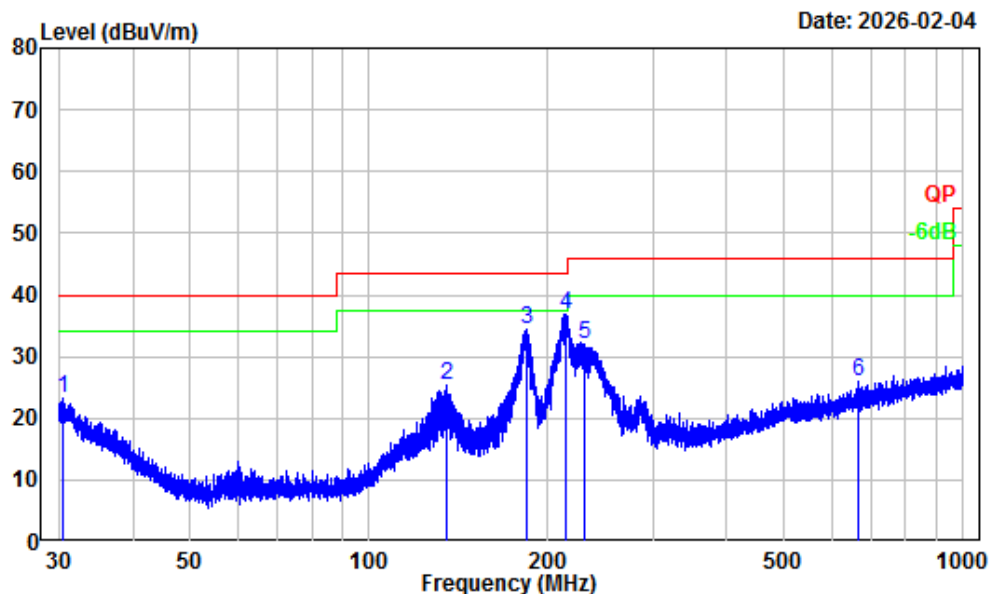

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.60	-6.27	29.46	23.19	40.00	-16.81	Peak
2	134.62	-11.46	36.96	25.50	43.50	-18.00	Peak
3	184.17	-13.95	48.46	34.51	43.50	-8.99	Peak
4	214.33	-14.18	51.03	36.85	43.50	-6.65	Peak
5	229.70	-13.87	45.78	31.91	46.00	-14.09	Peak
6	666.39	-3.86	29.87	26.01	46.00	-19.99	Peak


Vertical

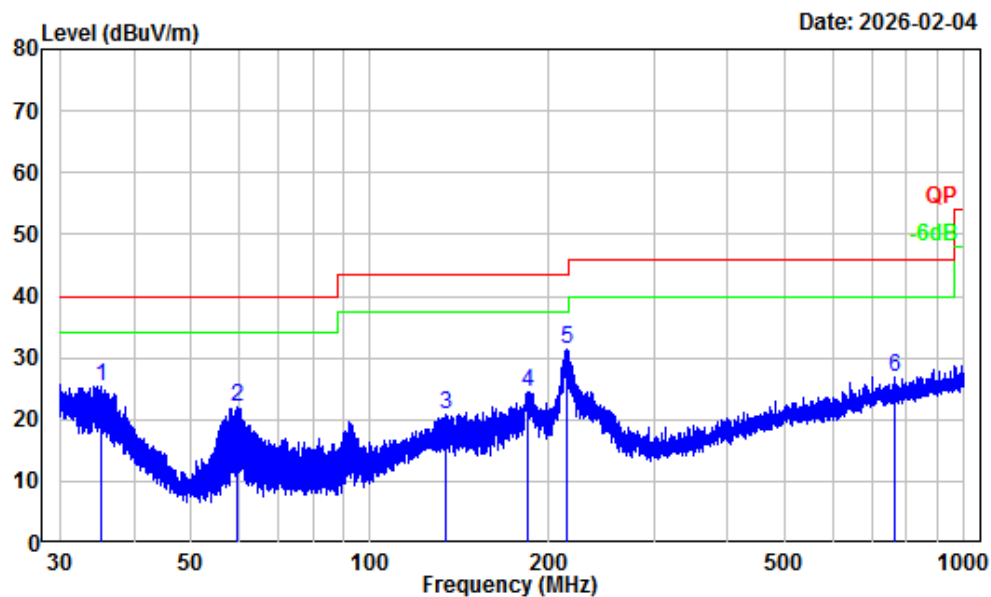

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.17	-8.99	34.37	25.38	40.00	-14.62	Peak
2	59.73	-18.15	40.05	21.90	40.00	-18.10	Peak
3	134.09	-11.41	32.24	20.83	43.50	-22.67	Peak
4	184.25	-13.95	38.53	24.58	43.50	-18.92	Peak
5	213.86	-14.16	45.56	31.40	43.50	-12.10	Peak
6	763.38	-2.60	29.52	26.92	46.00	-19.08	Peak

ANT2 (Maximum output power mode: GFSK High Channel)

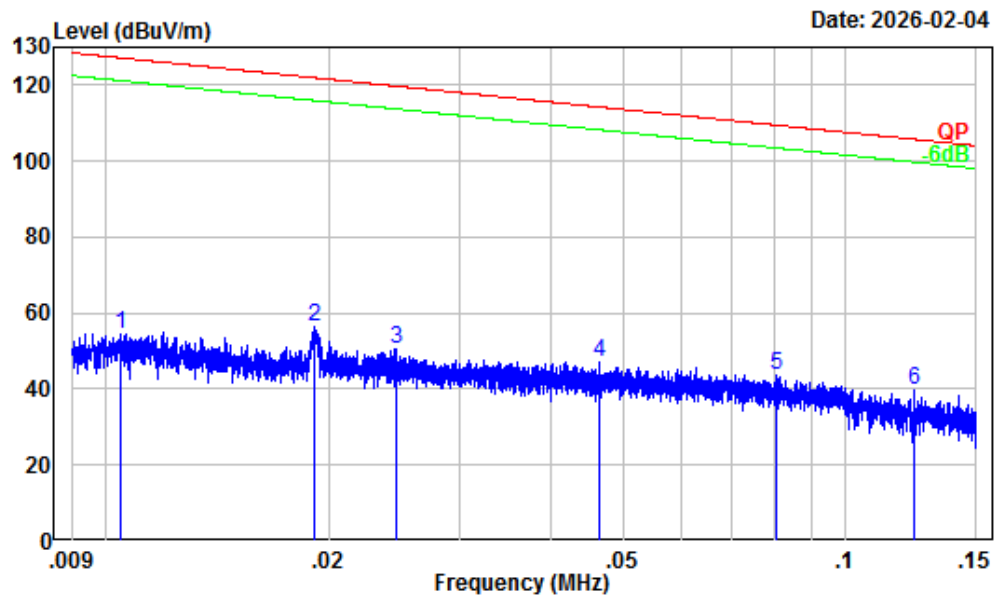9 kHz-30MHz:

Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.21	22.32	54.53	127.19	-72.66	Peak
2	0.019	30.56	25.63	56.19	121.96	-65.77	Peak
3	0.025	29.52	20.92	50.44	119.77	-69.33	Peak
4	0.046	26.78	20.32	47.10	114.28	-67.18	Peak
5	0.081	23.35	20.09	43.44	109.46	-66.02	Peak
6	0.124	20.60	19.22	39.82	105.76	-65.94	Peak

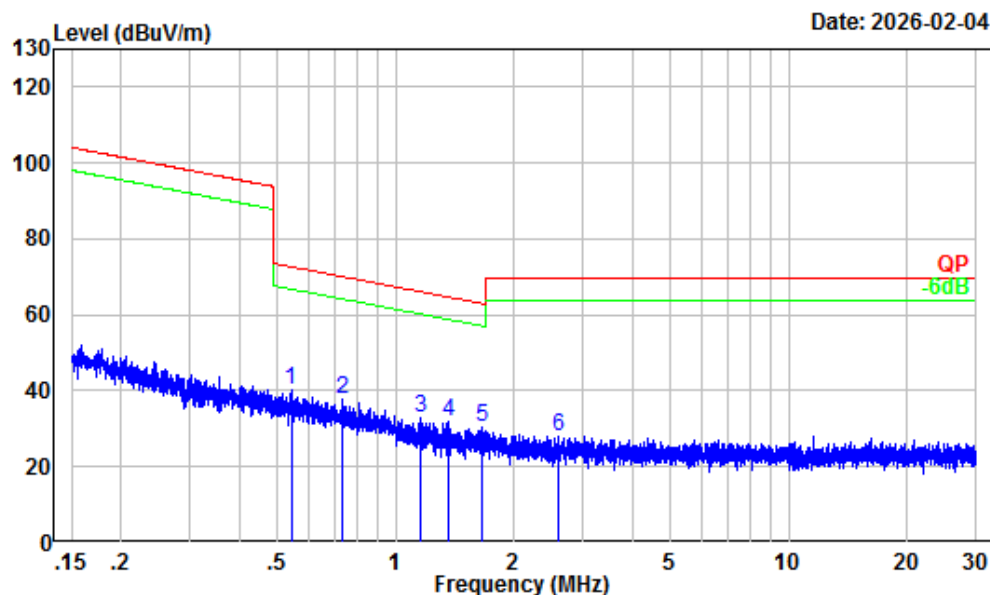


Site : Chamber A
Condition : 3m
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.542	5.88	34.14	40.02	72.90	-32.88	Peak
2	0.735	3.50	34.14	37.64	70.20	-32.56	Peak
3	1.153	0.77	32.07	32.84	66.21	-33.37	Peak
4	1.369	0.17	31.64	31.81	64.69	-32.88	Peak
5	1.653	-0.63	31.14	30.51	63.02	-32.51	Peak
6	2.600	-1.93	30.02	28.09	69.54	-41.45	Peak

30MHz-1GHz:


Horizontal

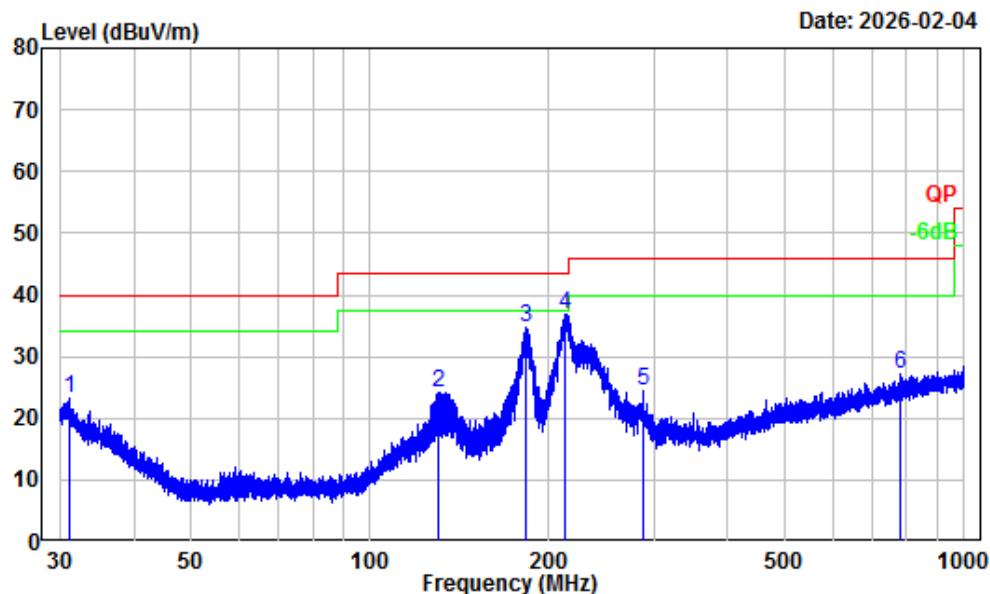

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.10	-6.53	29.75	23.22	40.00	-16.78	Peak
2	129.98	-11.21	35.49	24.28	43.50	-19.22	Peak
3	183.36	-13.91	48.55	34.64	43.50	-8.86	Peak
4	213.02	-14.14	50.98	36.84	43.50	-6.66	Peak
5	287.61	-11.22	35.76	24.54	46.00	-21.46	Peak
6	778.24	-2.40	29.49	27.09	46.00	-18.91	Peak

Vertical

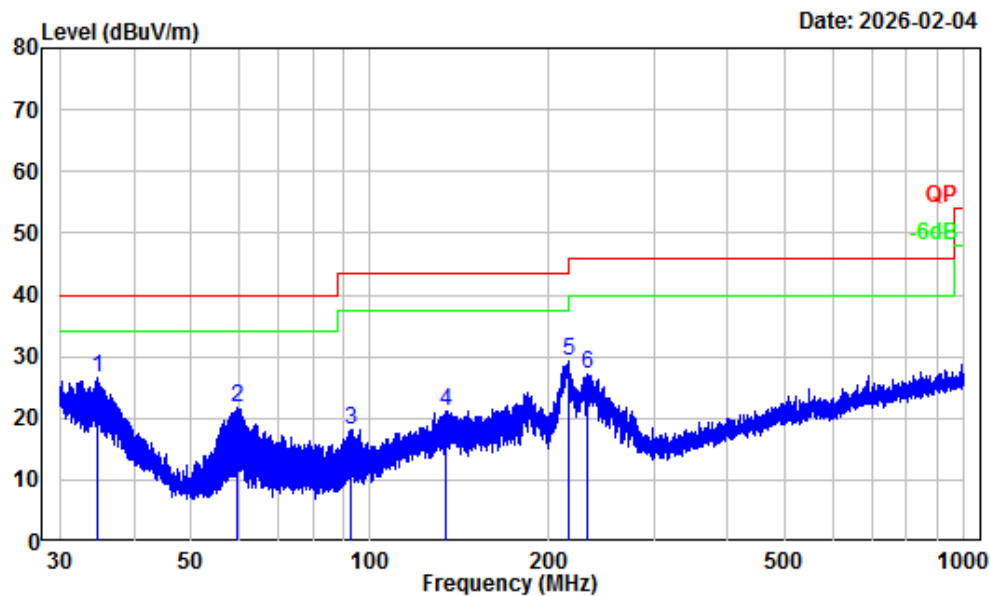

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501A92967E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.65	-8.68	35.19	26.51	40.00	-13.49	Peak
2	59.65	-18.16	39.90	21.74	40.00	-18.26	Peak
3	92.50	-17.75	35.93	18.18	43.50	-25.32	Peak
4	134.26	-11.43	32.68	21.25	43.50	-22.25	Peak
5	215.83	-14.20	43.55	29.35	43.50	-14.15	Peak
6	232.63	-13.69	40.81	27.12	46.00	-18.88	Peak

Above 1GHz:**ANT1:****GFSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	126.22	PK	H	-13.22	113.00	/	/
1921.54	110.74	PK	V	-13.22	97.52	/	/
3843.07	53.45	PK	H	-10.00	43.45	74	-30.55
3843.07	52.13	PK	V	-10.00	42.13	74	-31.87
Middle Channel							
1924.99	126.23	PK	H	-13.19	113.04	/	/
1924.99	111.35	PK	V	-13.19	98.16	/	/
3849.98	52.36	PK	H	-10.01	42.35	74	-31.65
3849.98	52.30	PK	V	-10.01	42.29	74	-31.71
High Channel							
1928.45	124.52	PK	H	-13.17	111.35	/	/
1928.45	110.53	PK	V	-13.17	97.36	/	/
3856.90	52.45	PK	H	-9.98	42.47	74	-31.53
3856.90	52.17	PK	V	-9.98	42.19	74	-31.81

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

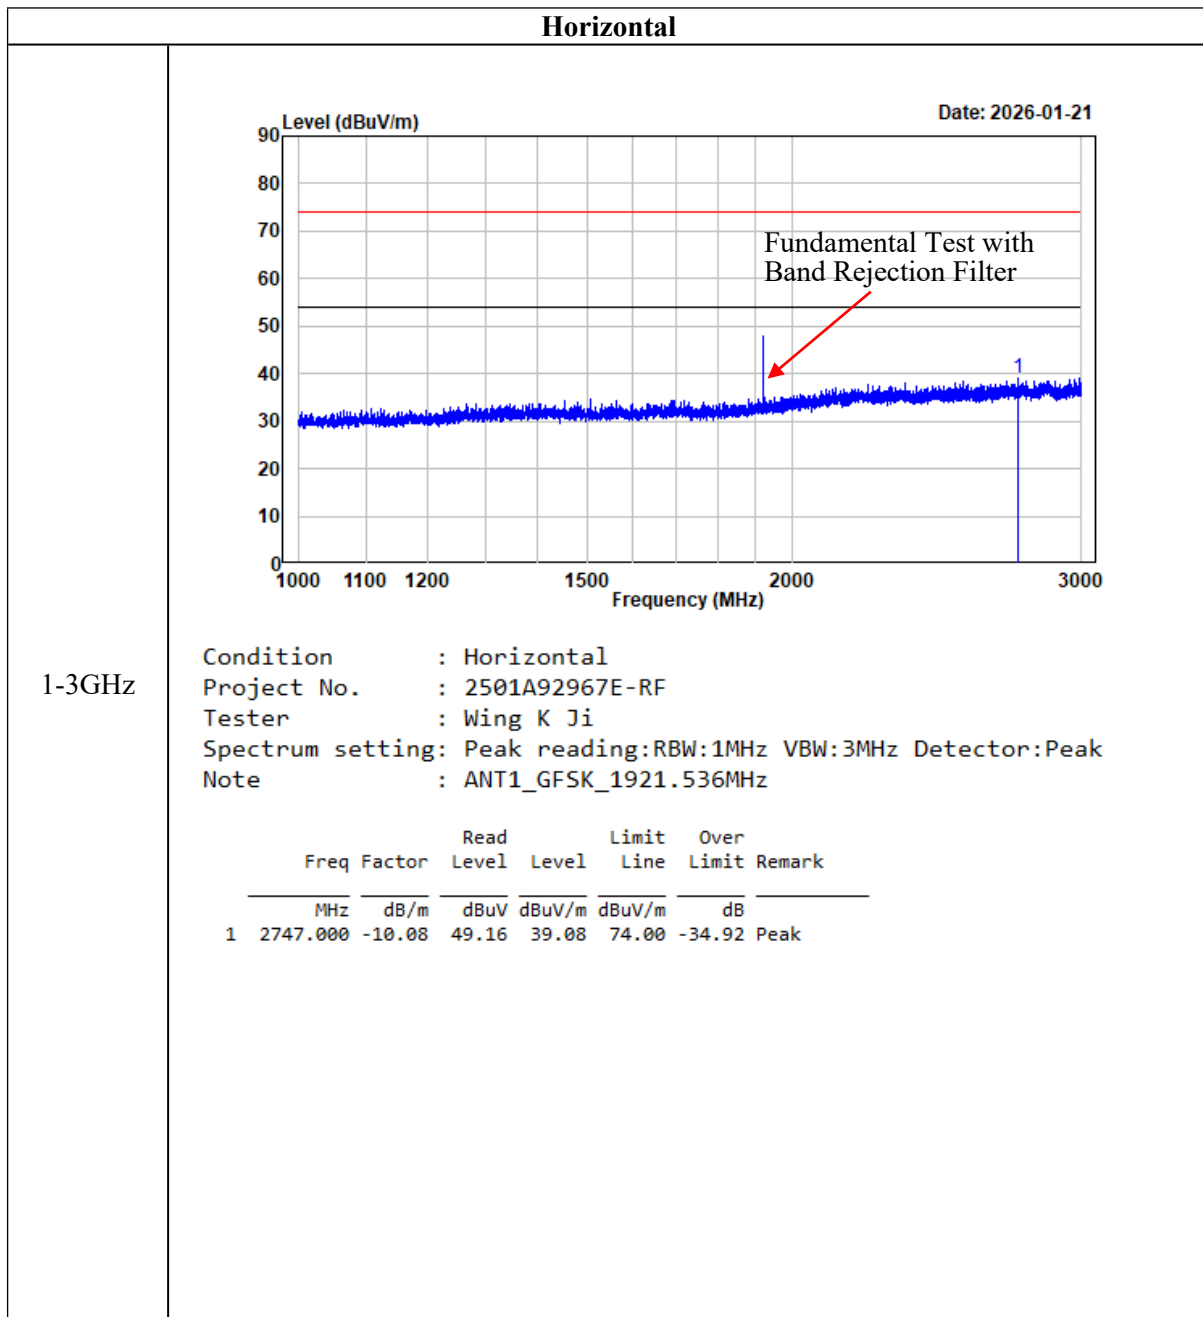

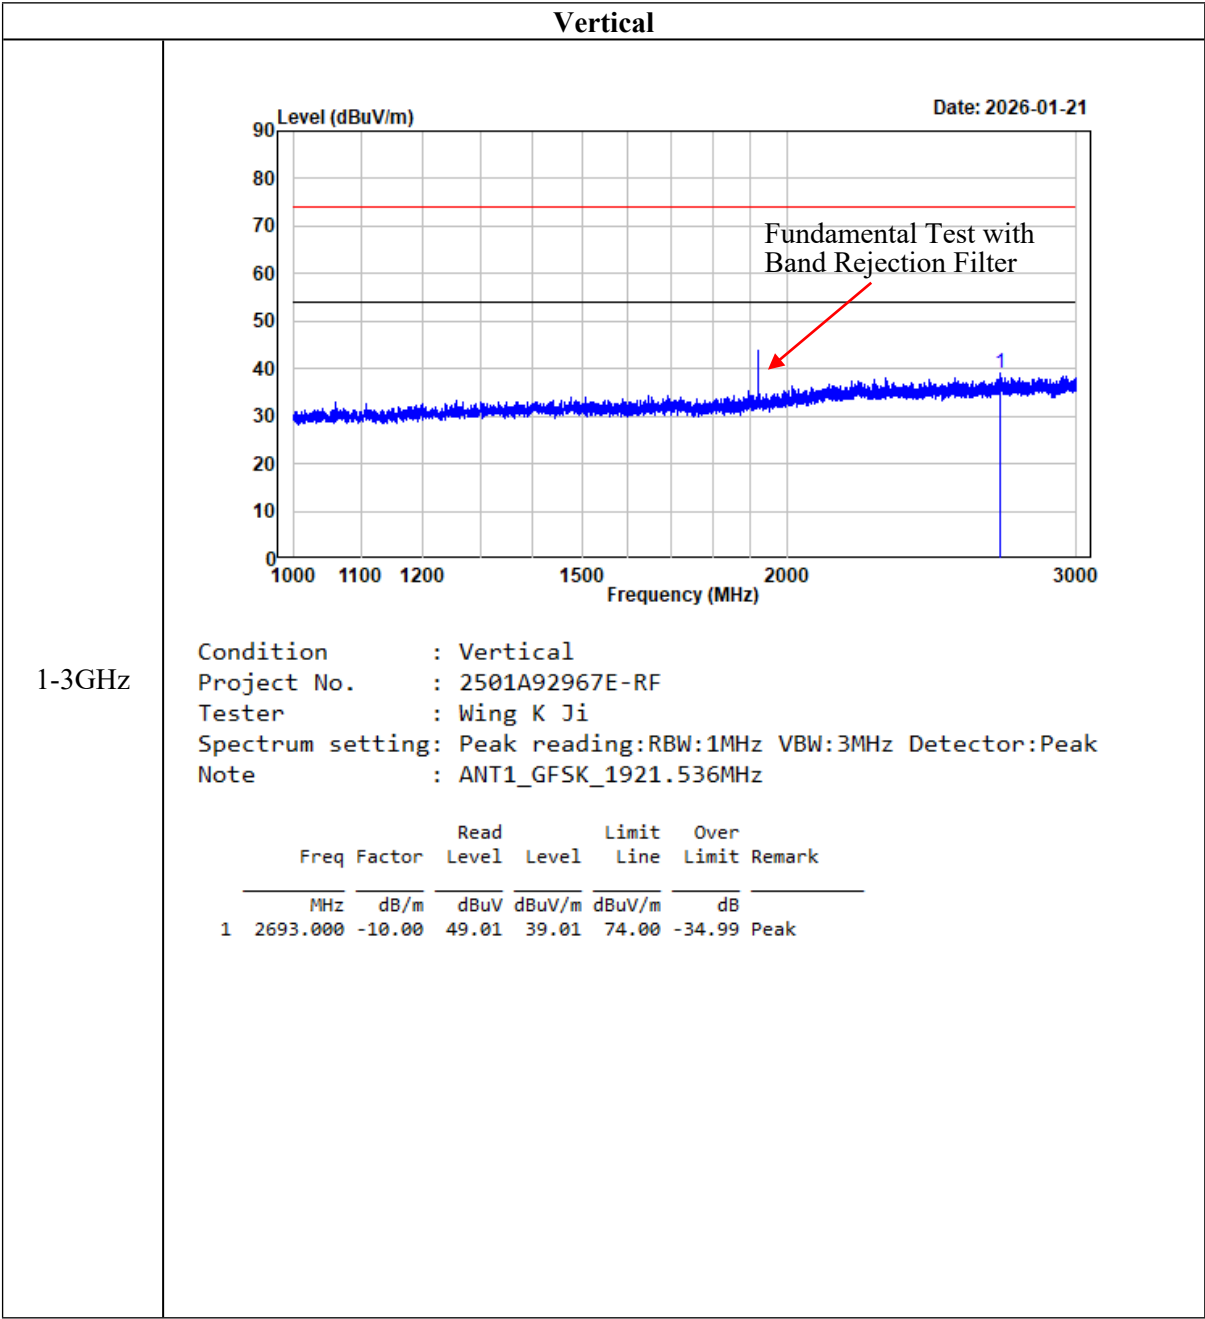


Horizontal Peak


3-18GHz

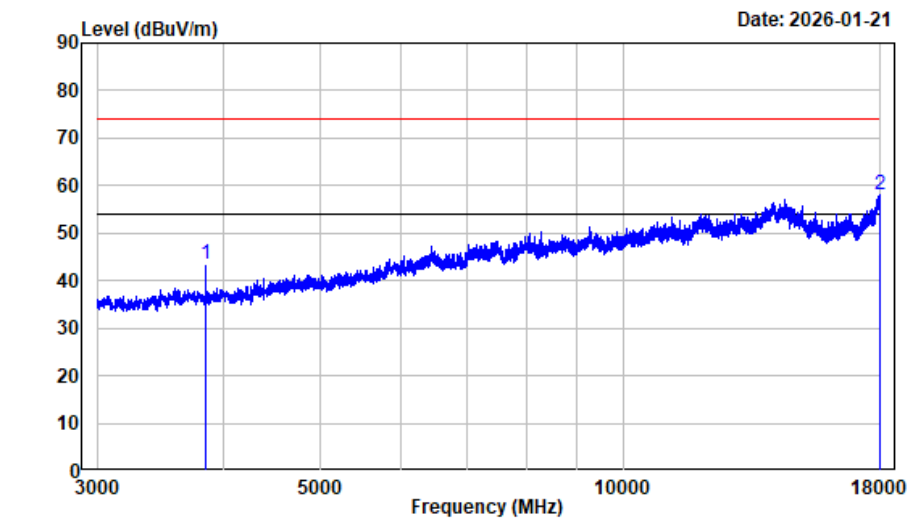

Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_GFSK_1921.536MHz


		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3843.070	-10.00	53.45	43.45	74.00	-30.55	Peak
2 17968.130	9.42	48.51	57.93	74.00	-16.07	Peak

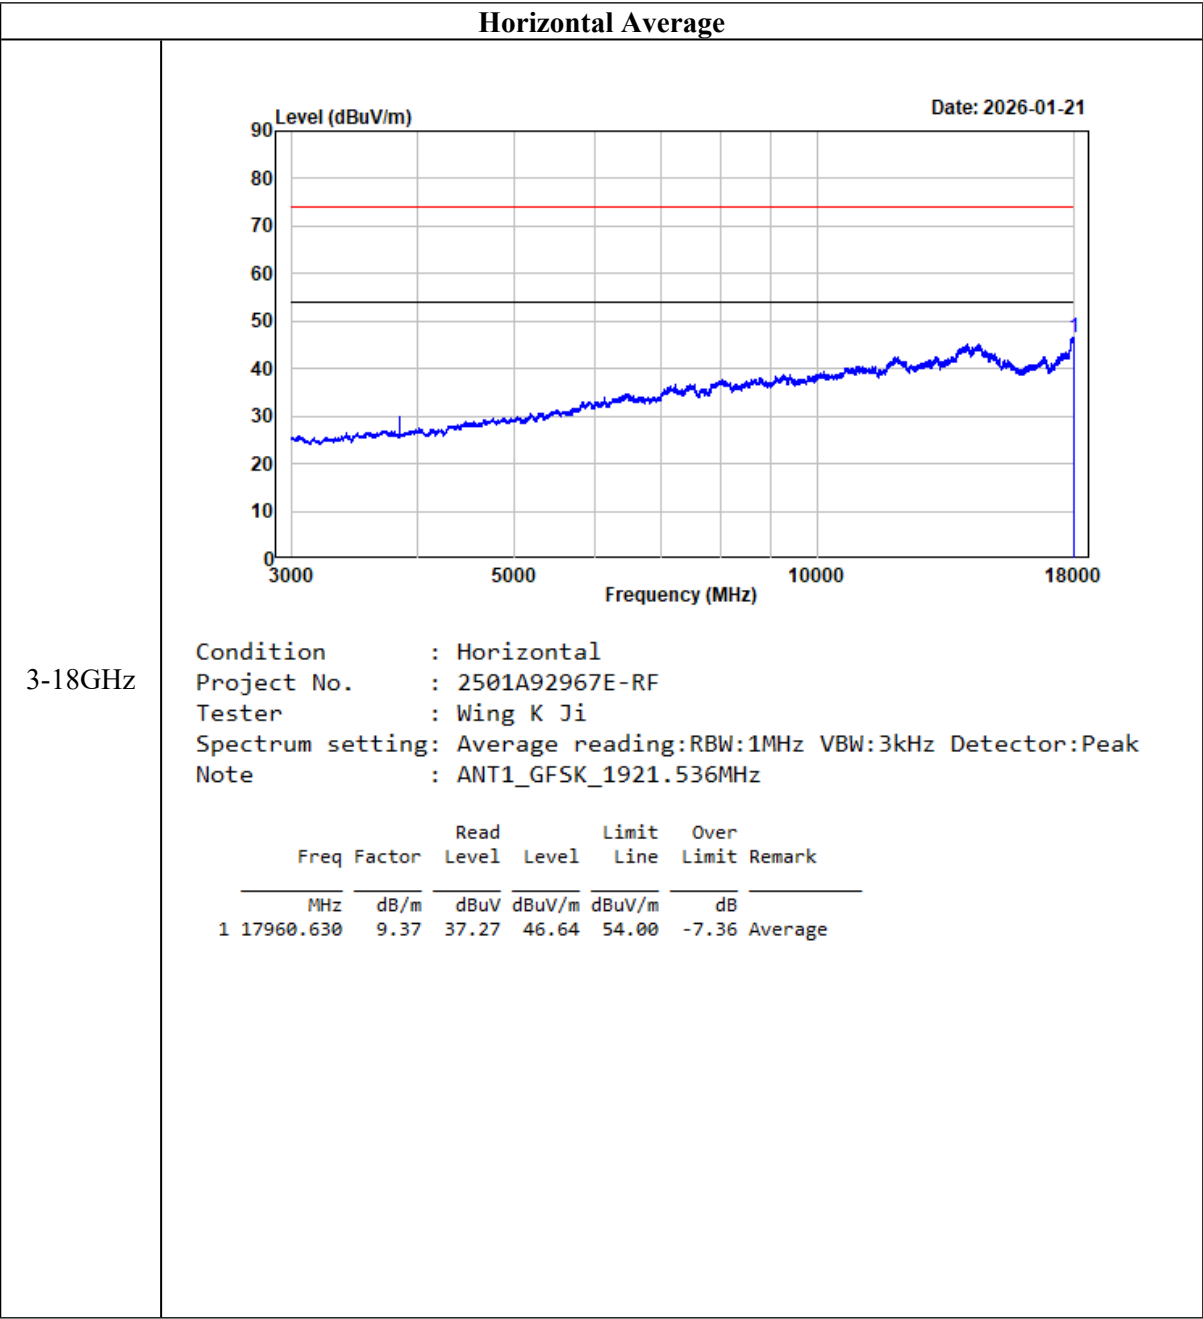

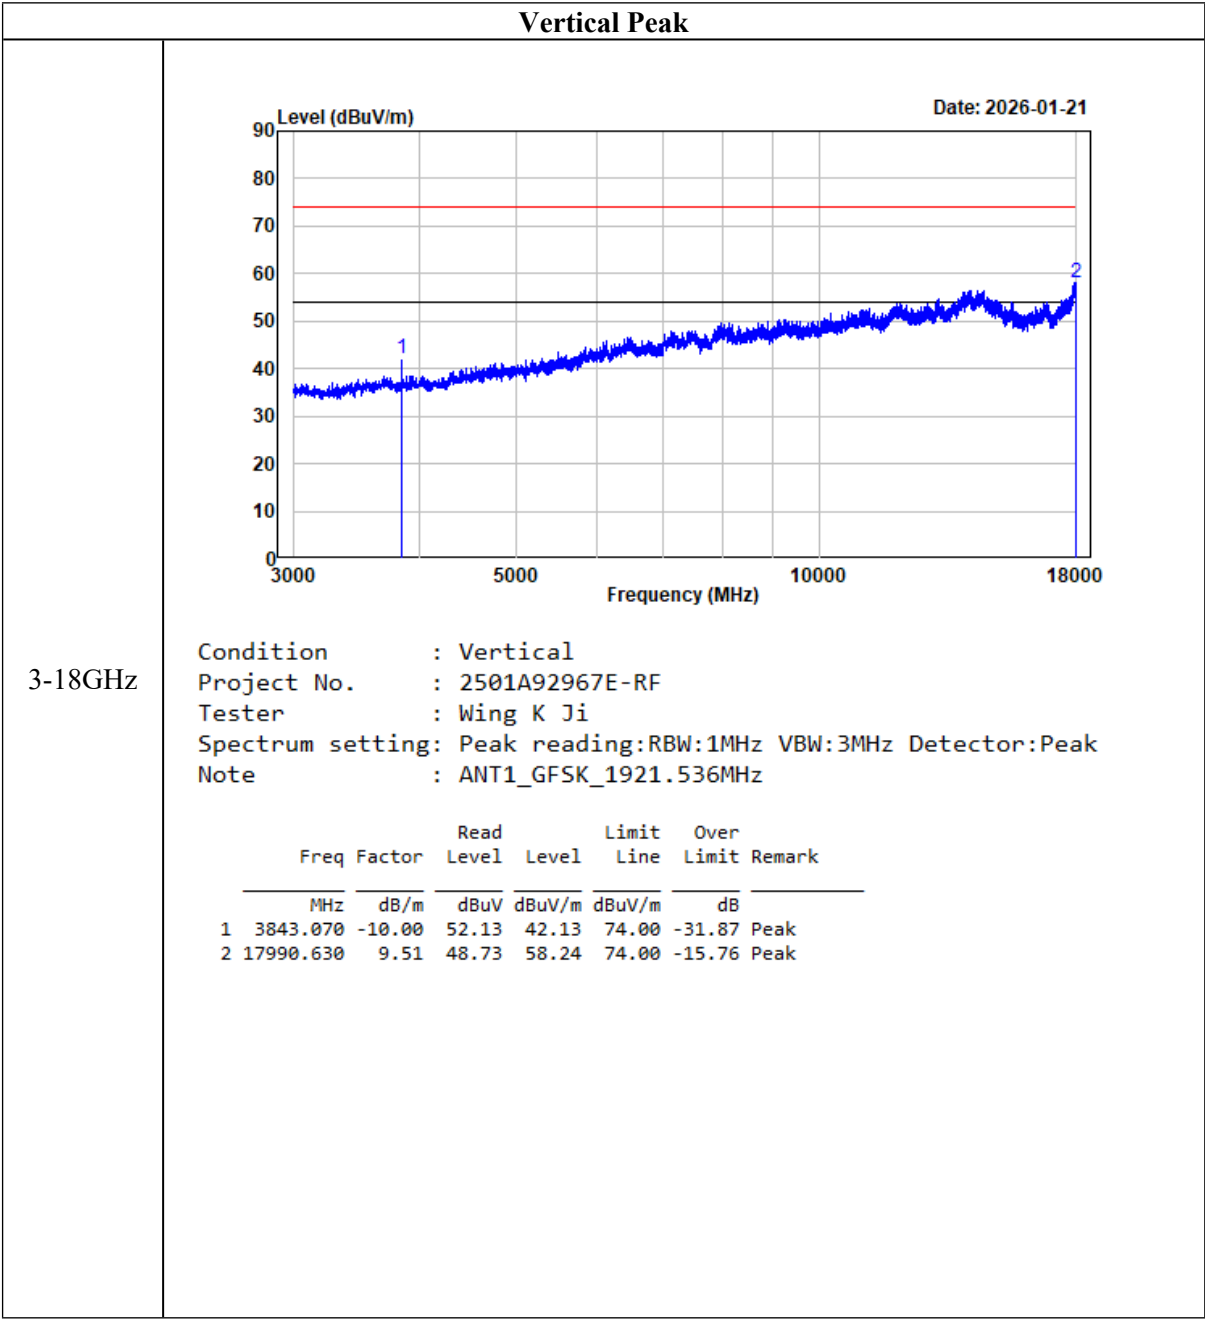


Vertical Average

3-18GHz

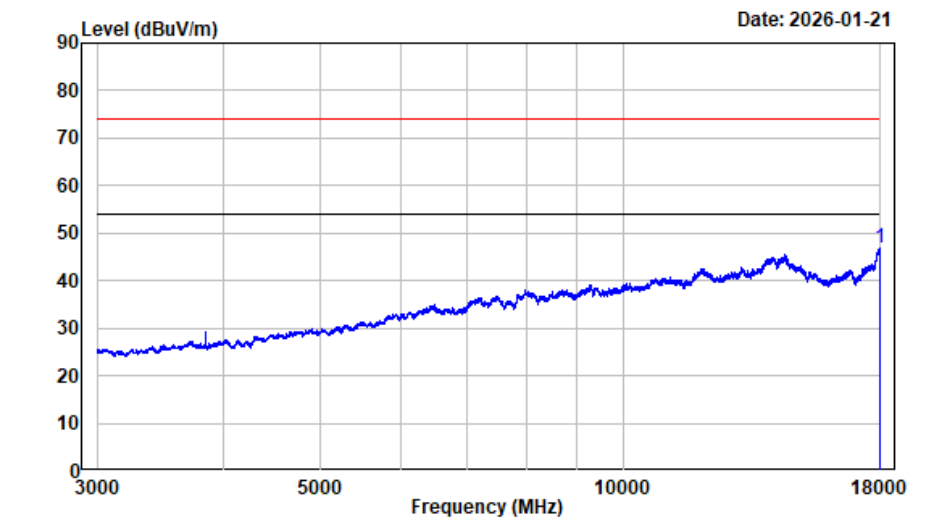


Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT1_GFSK_1921.536MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17962.500		9.39	37.37	46.76	54.00	-7.24	Average

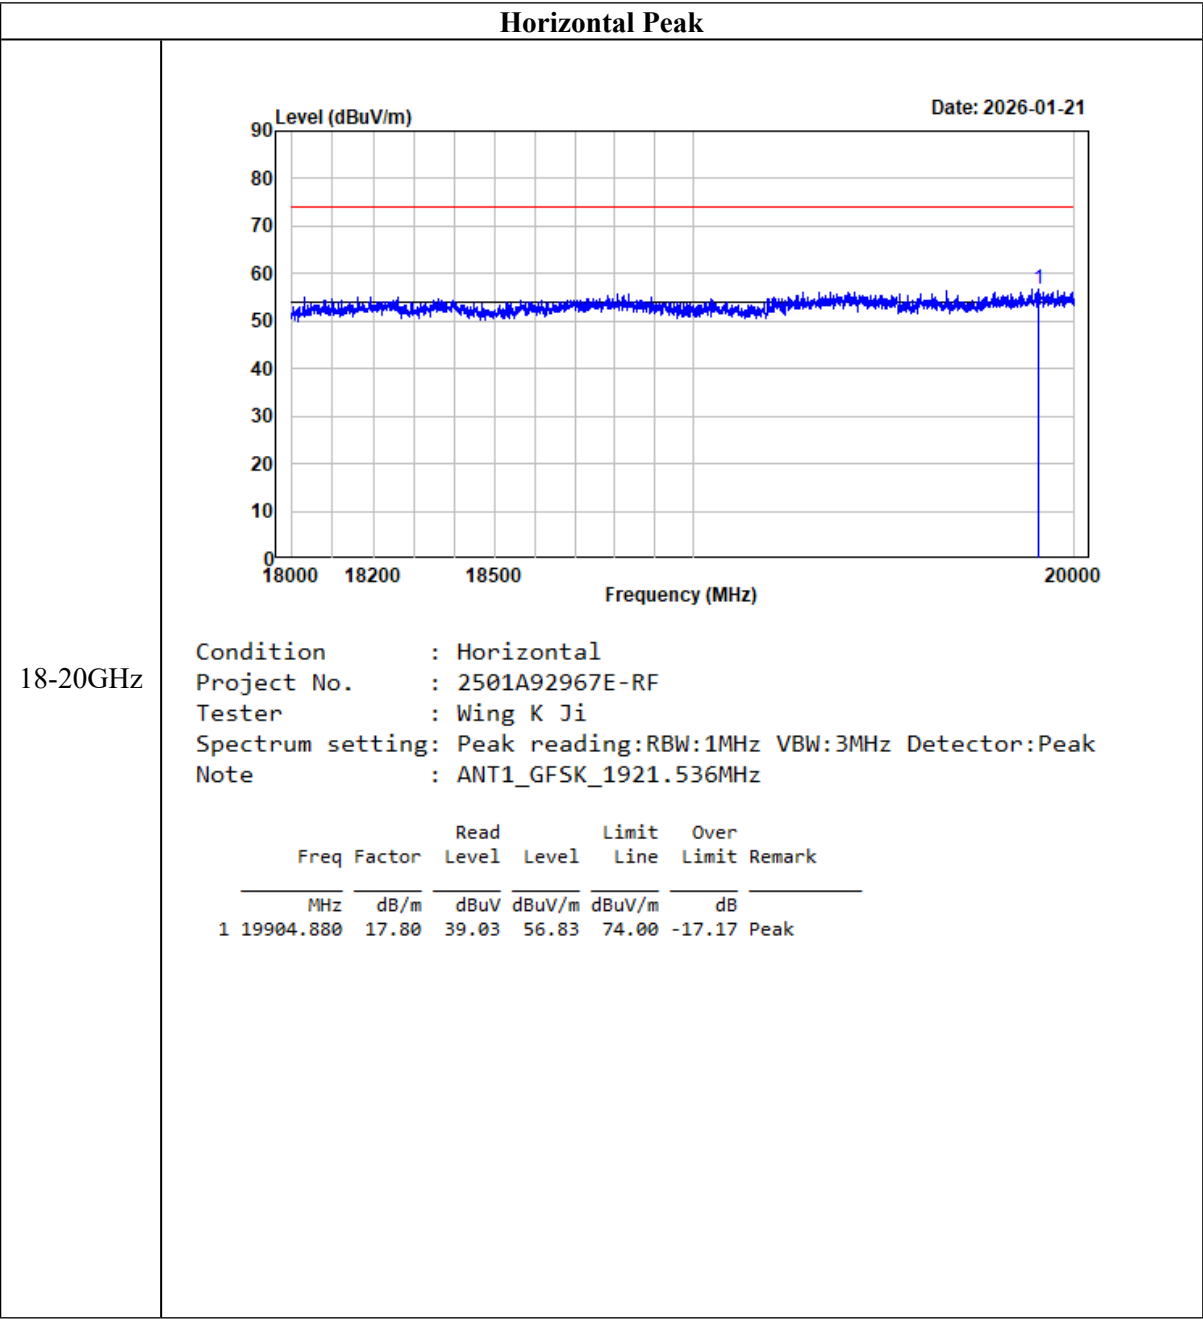


Horizontal Average


18-20GHz

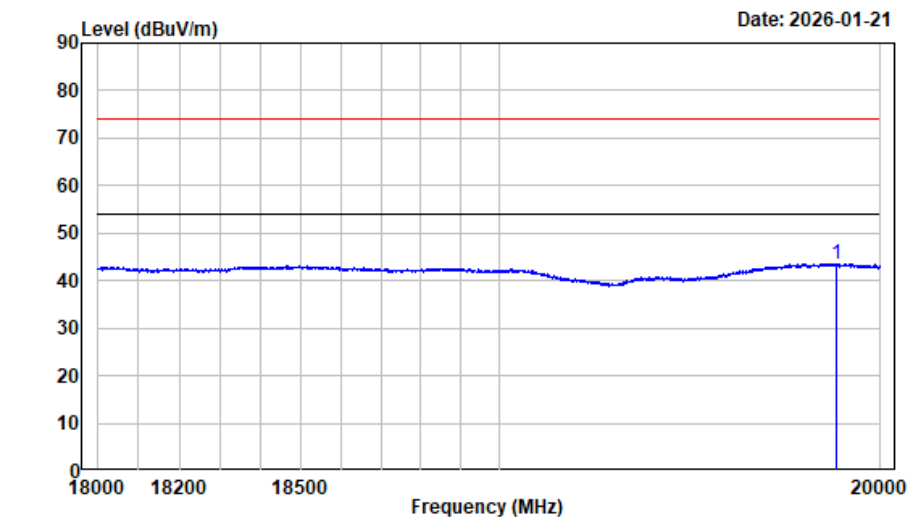

Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT1_GFSK_1921.536MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19882.130		17.78	25.78	43.56	54.00	-10.44	Average

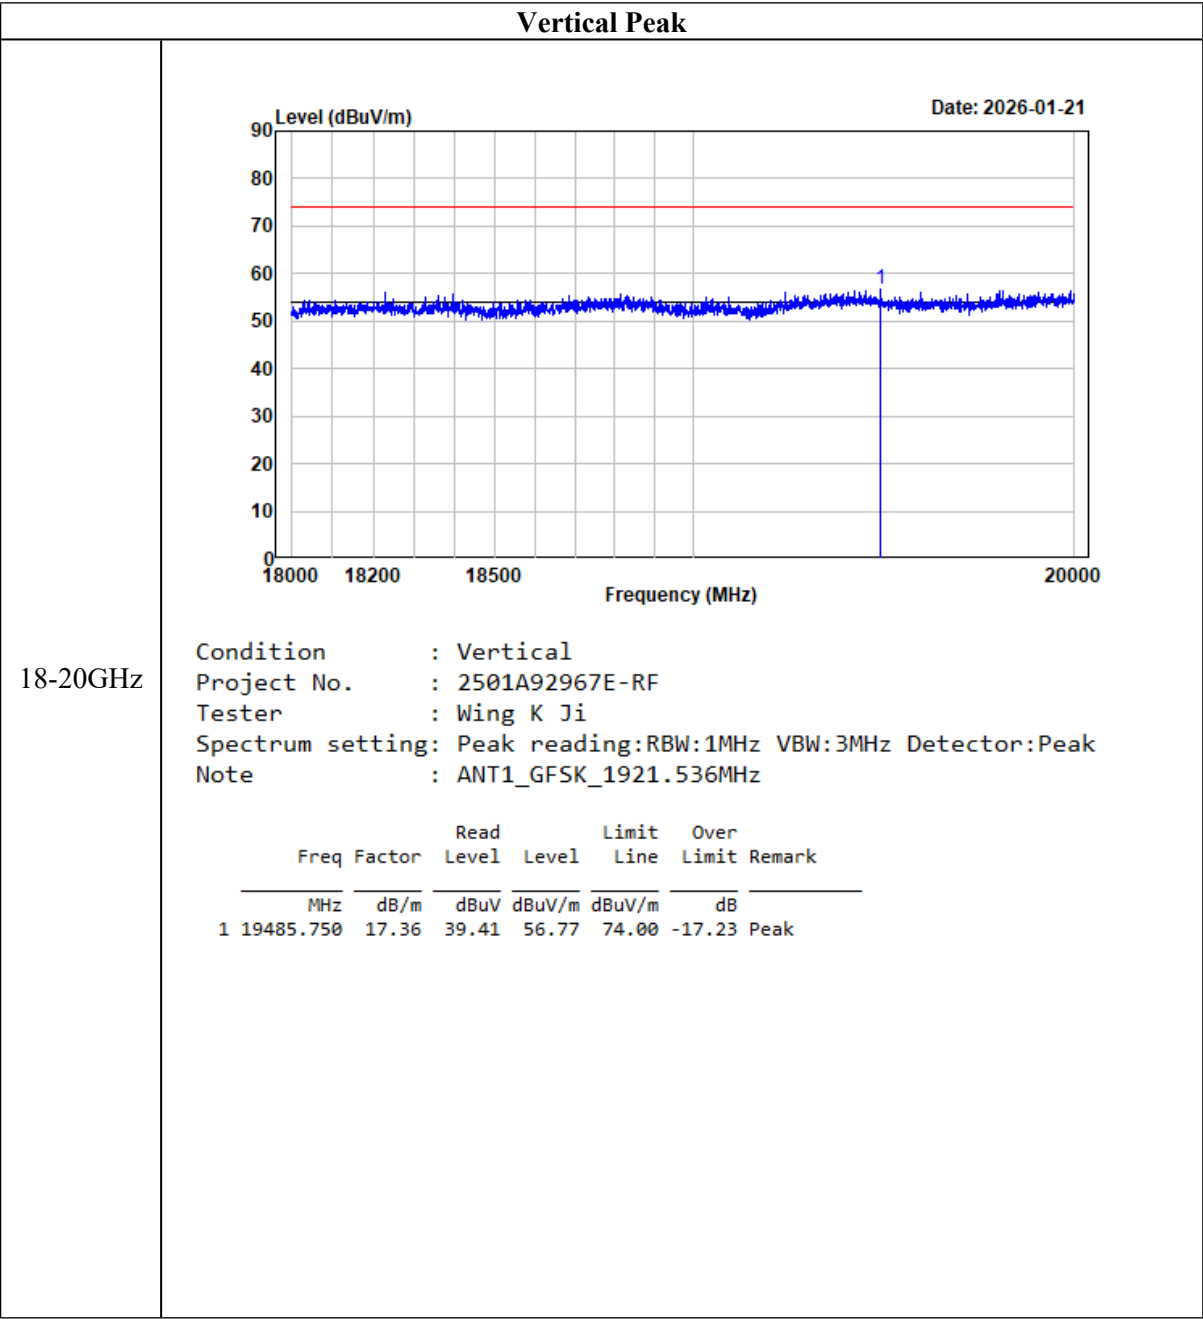

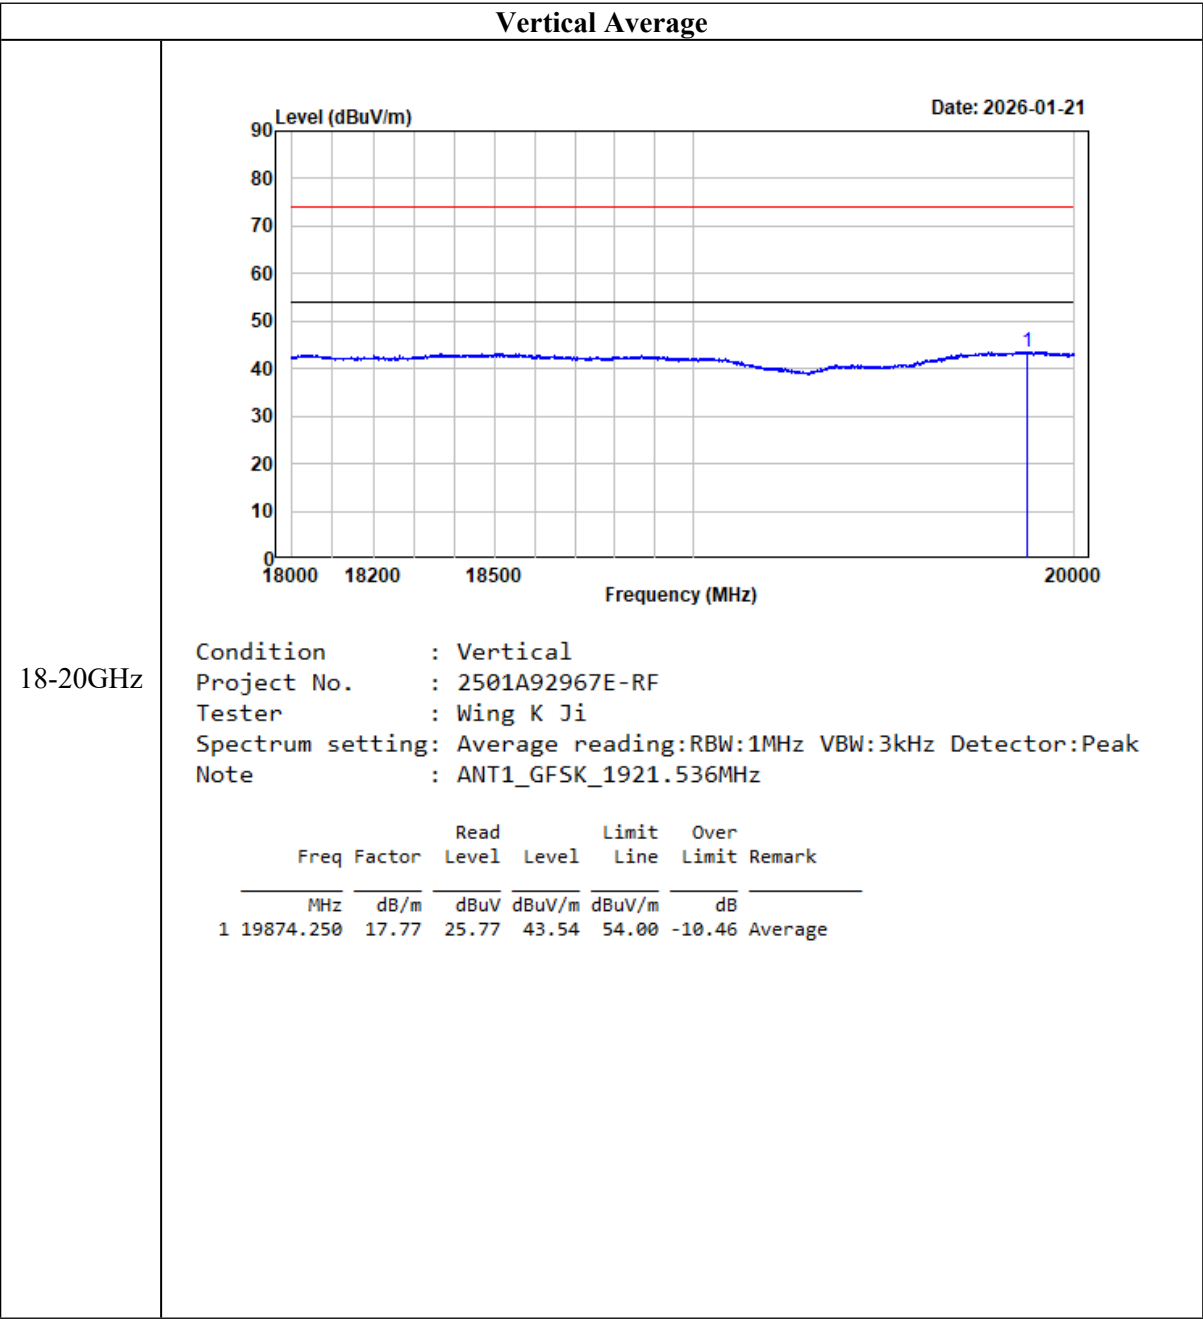

$\pi/2$ -DBPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	125.20	PK	H	-13.22	111.98	/	/
1921.54	109.37	PK	V	-13.22	96.15	/	/
3843.07	52.25	PK	H	-10.00	42.25	74	-31.75
3843.07	52.08	PK	V	-10.00	42.08	74	-31.92
Middle Channel							
1924.99	123.30	PK	H	-13.19	110.11	/	/
1924.99	111.79	PK	V	-13.19	98.60	/	/
3849.98	52.13	PK	H	-10.01	42.12	74	-31.88
3849.98	51.97	PK	V	-10.01	41.96	74	-32.04
High Channel							
1928.45	123.52	PK	H	-13.17	110.35	/	/
1928.45	109.69	PK	V	-13.17	96.52	/	/
3856.90	52.03	PK	H	-9.98	42.05	74	-31.95
3856.90	51.60	PK	V	-9.98	41.62	74	-32.38

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

Listed with the worst case test plot:

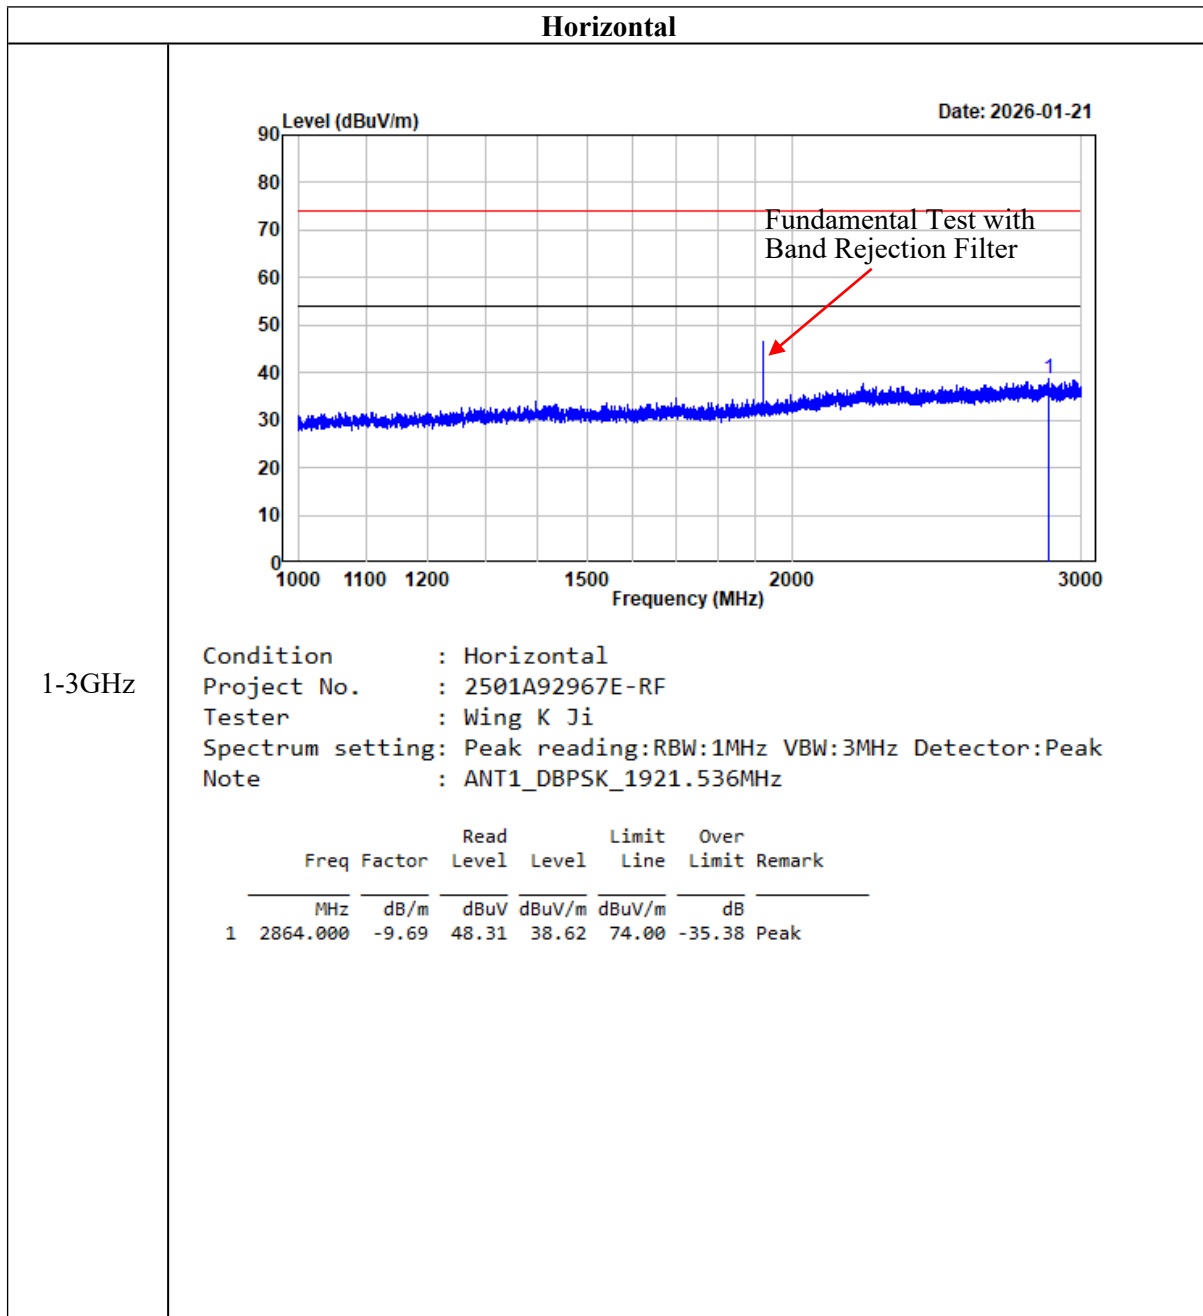

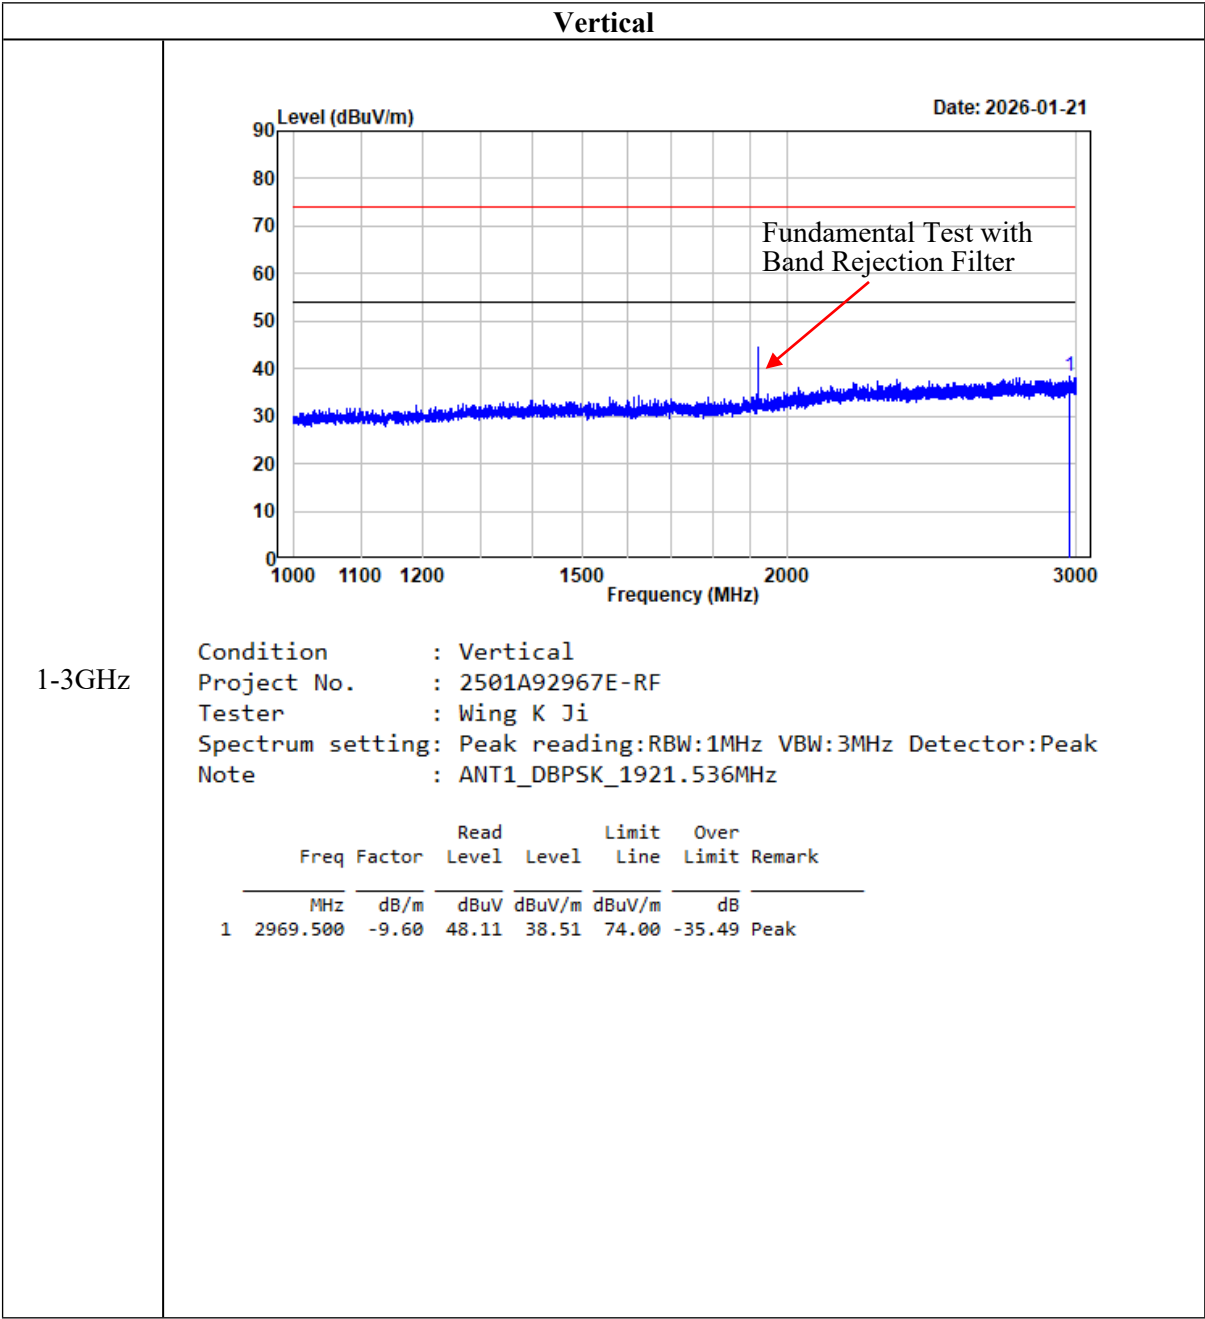


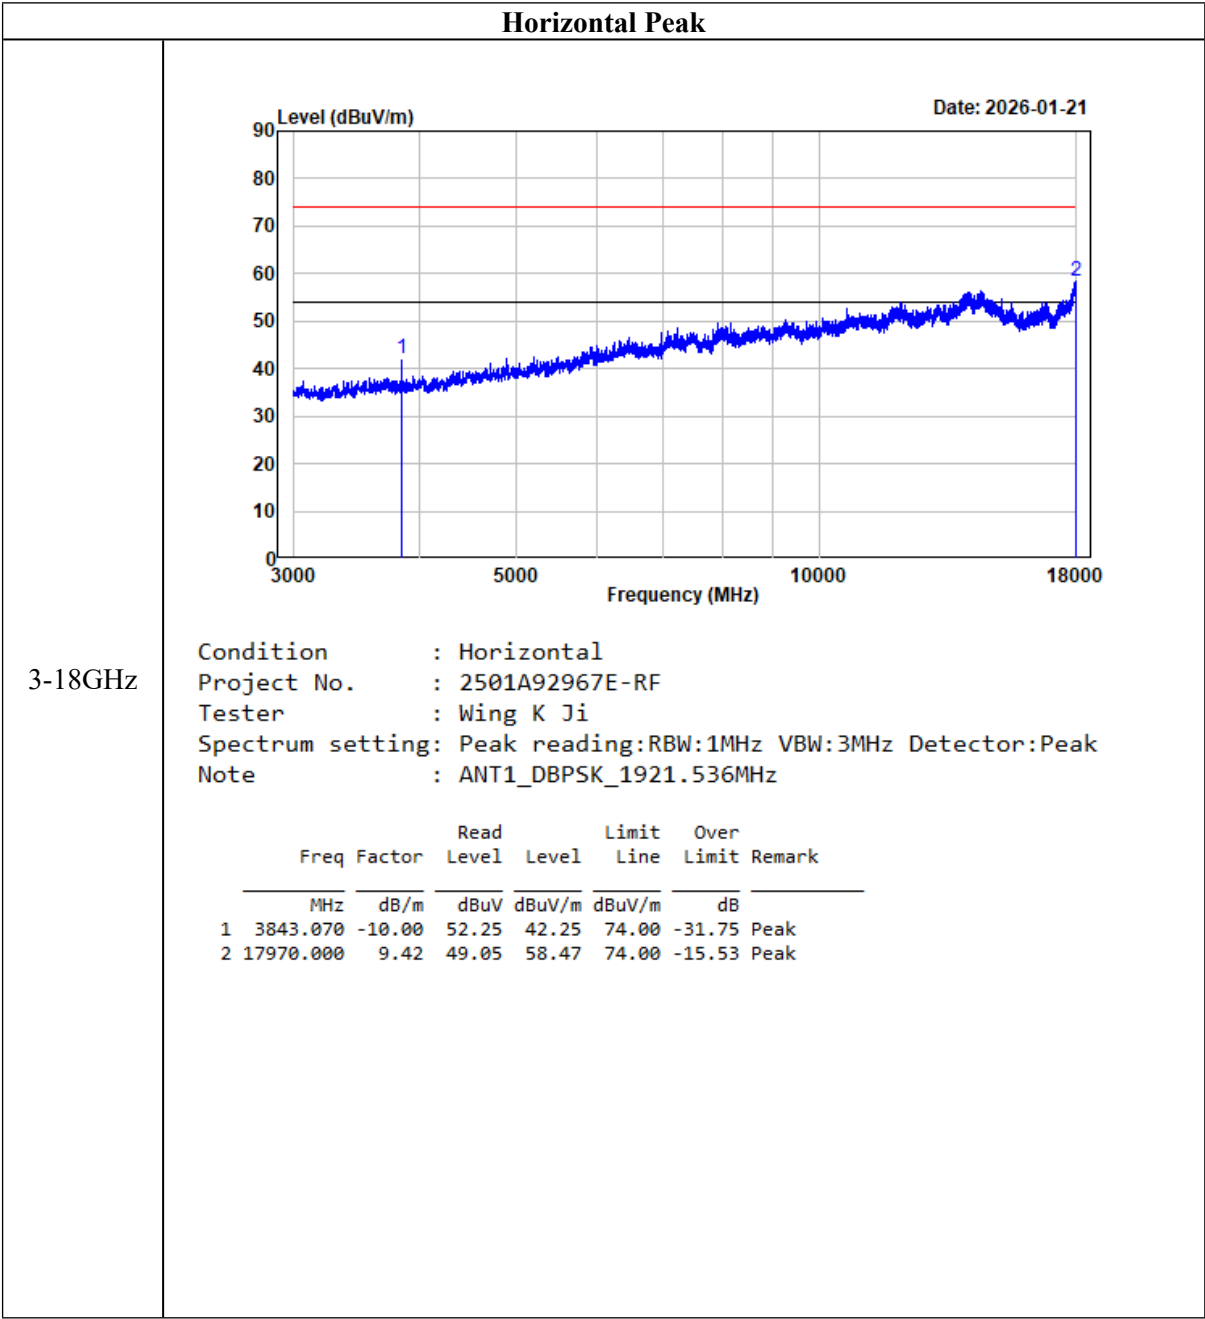

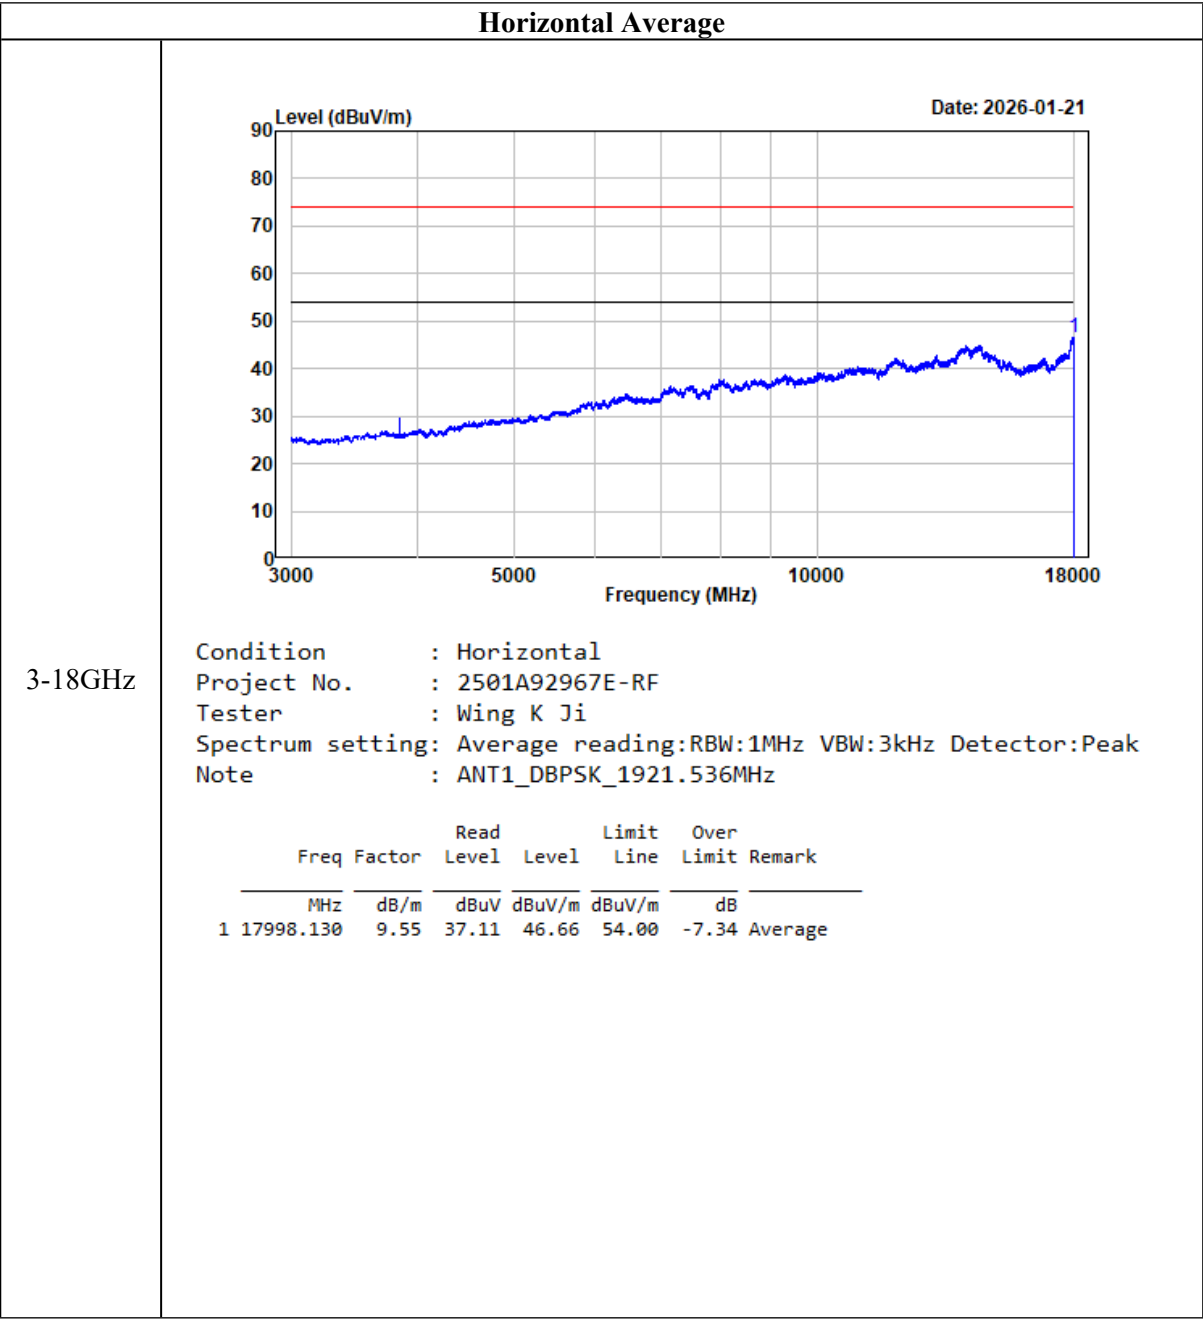


Vertical Peak


3-18GHz

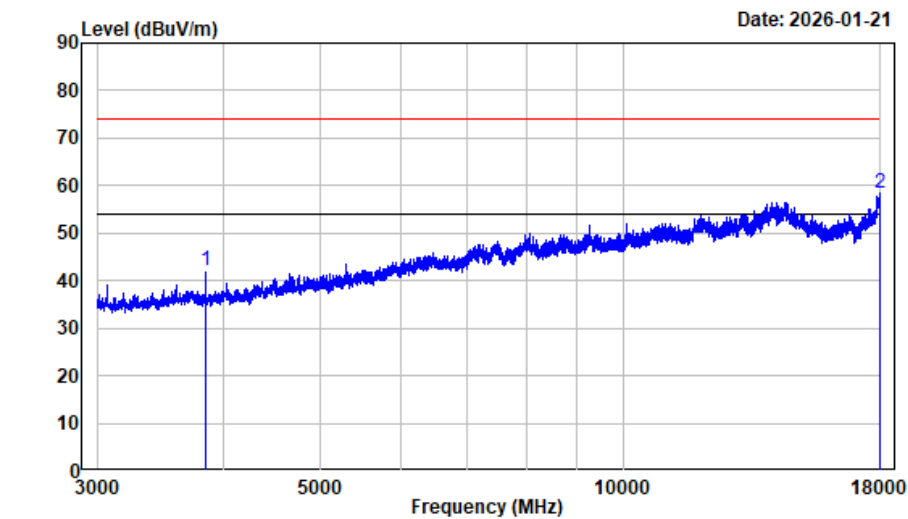

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_DBPSK_1921.536MHz


		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3843.070	-10.00	52.08	42.08	74.00	-31.92	Peak
2 17992.500	9.53	48.88	58.41	74.00	-15.59	Peak

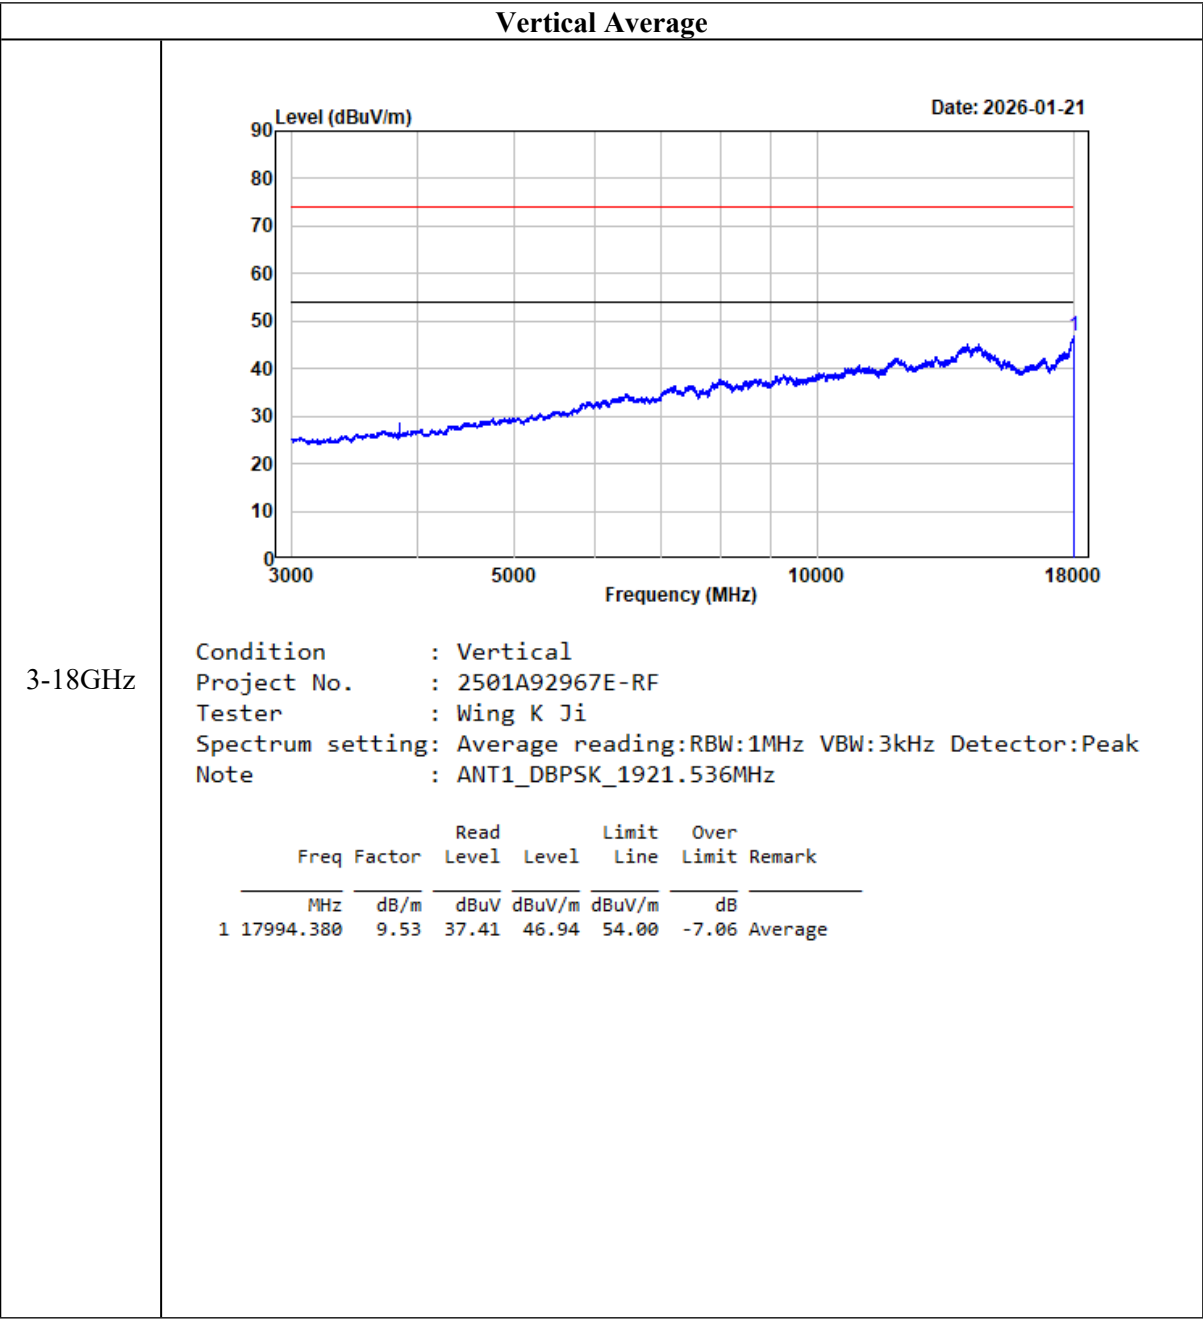

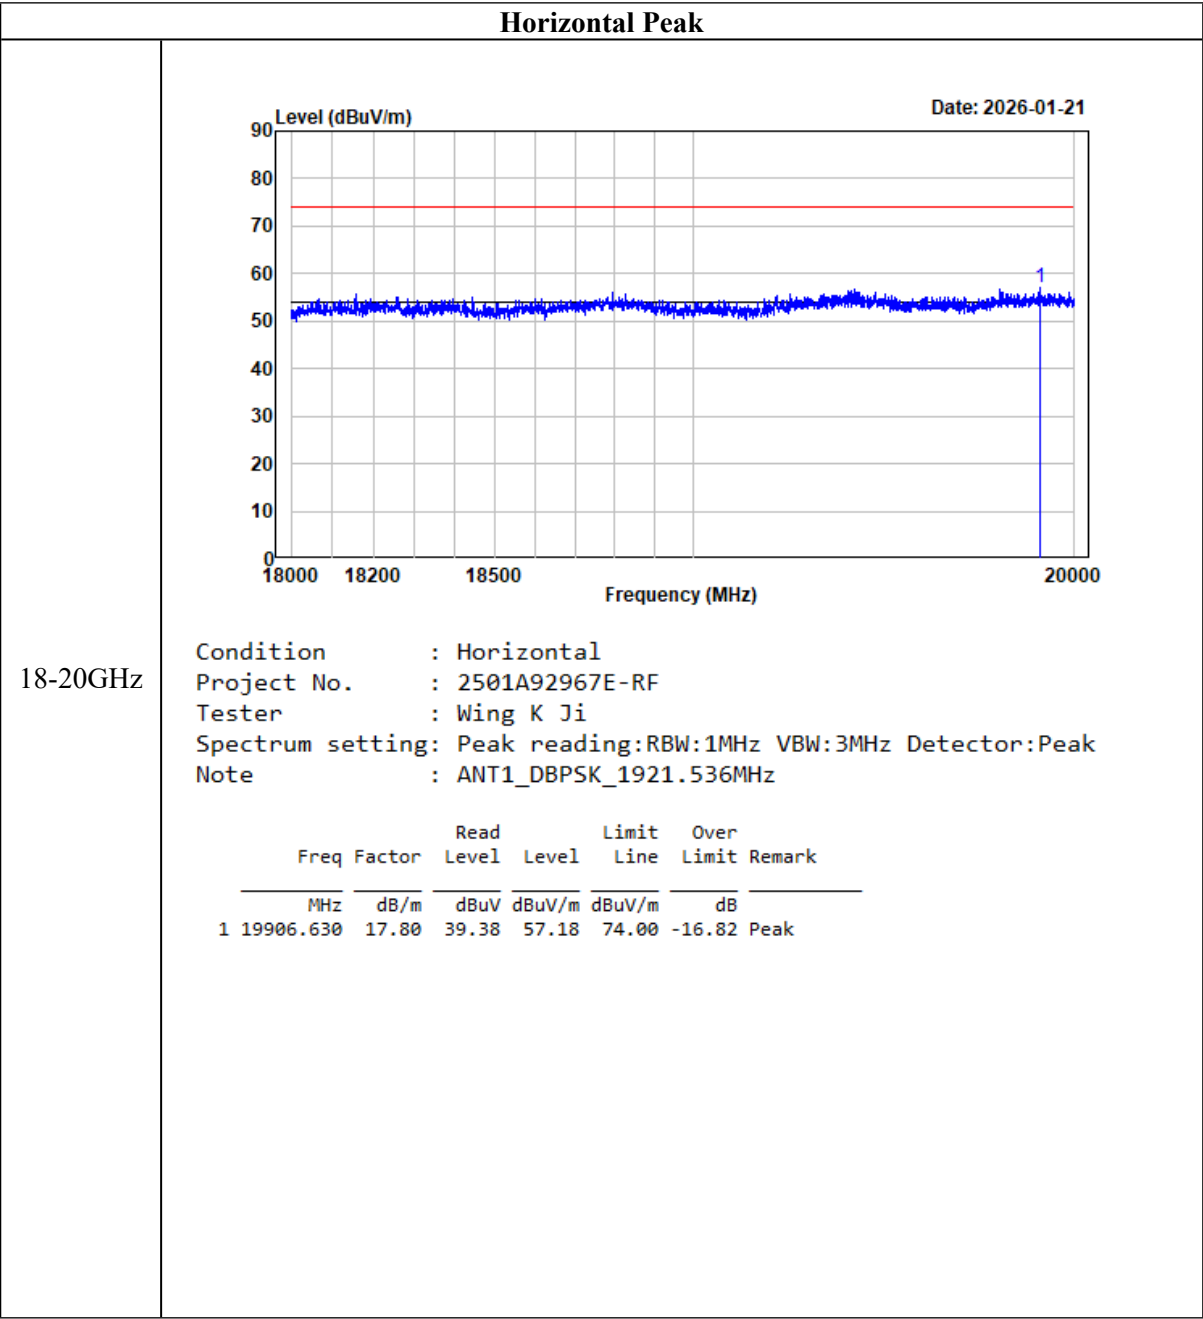


Horizontal Average

18-20GHz

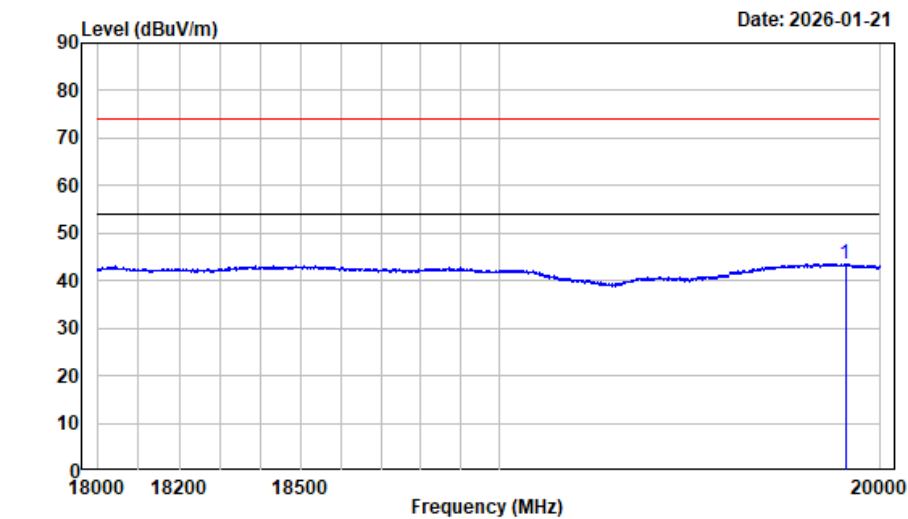


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT1_DBPSK_1921.536MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19905.750	17.80	25.78	43.58	54.00	-10.42	Average

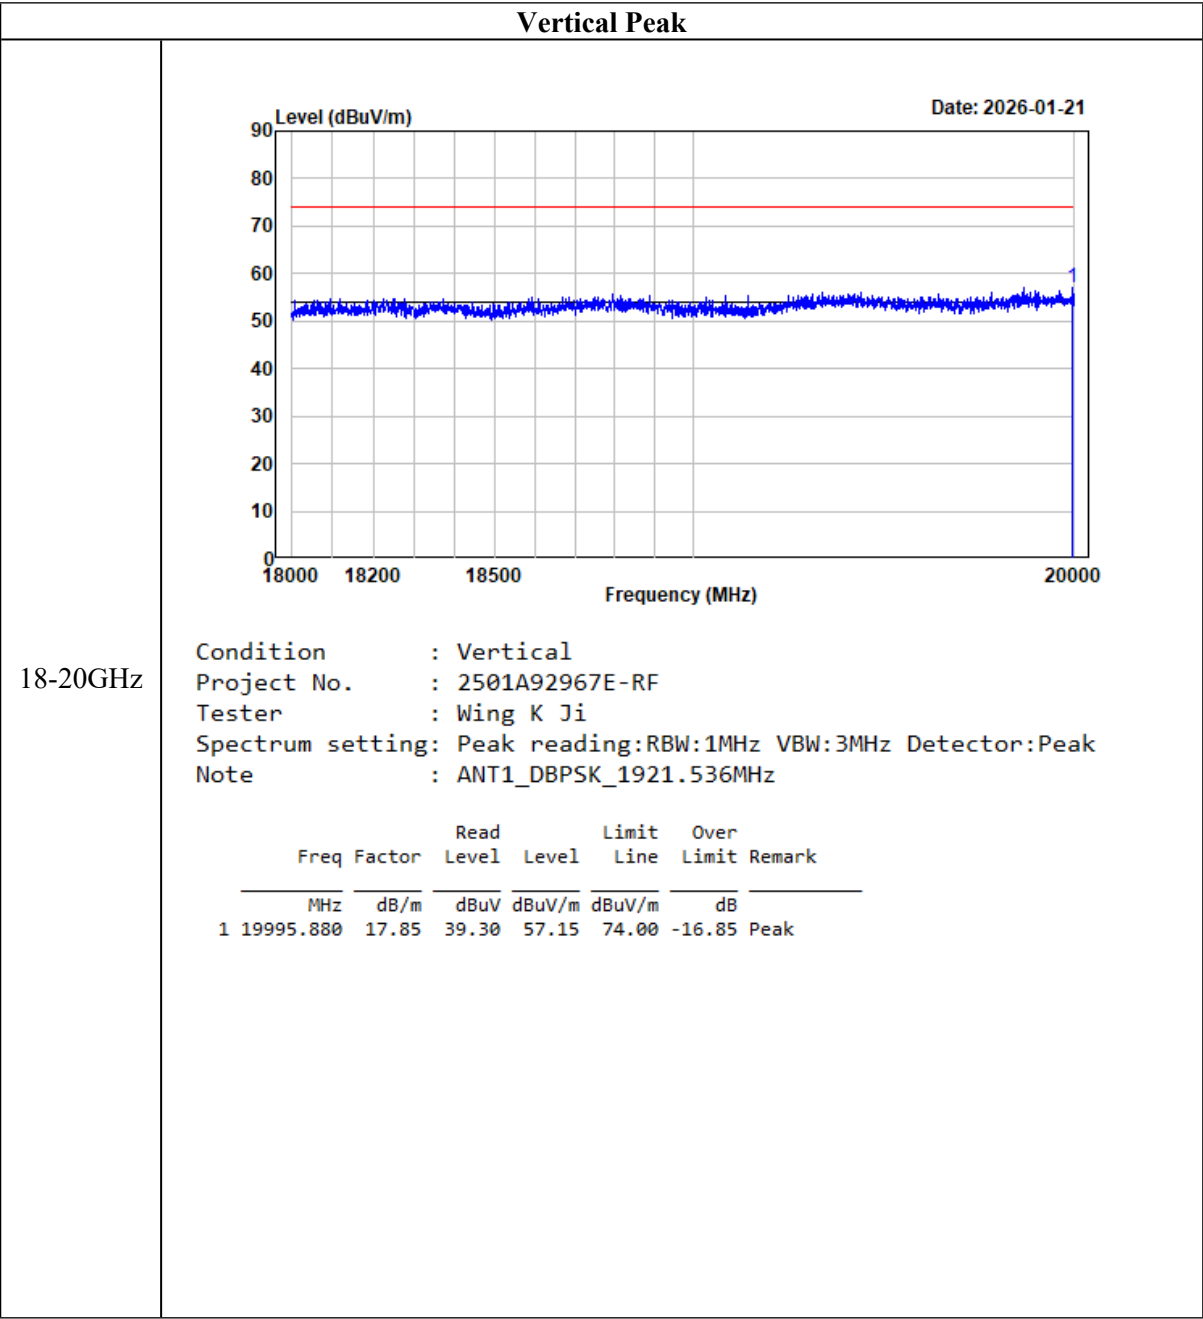

Vertical Average

18-20GHz

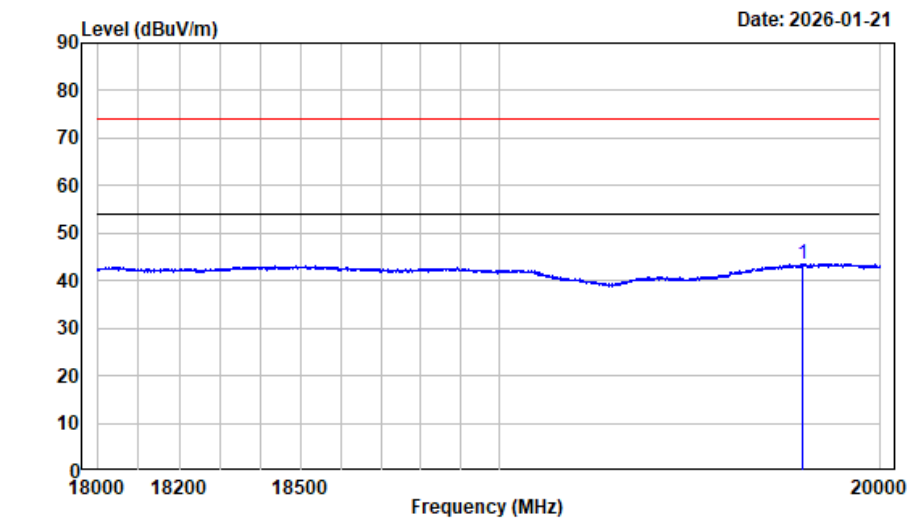

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT1_DBPSK_1921.536MHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19792.000	17.73	25.91	43.64	54.00	-10.36	Average

$\pi/4$ -DQPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	123.48	PK	H	-13.22	110.26	/	/
1921.54	111.81	PK	V	-13.22	98.59	/	/
3843.07	51.68	PK	H	-10.00	41.68	74	-32.32
3843.07	51.54	PK	V	-10.00	41.54	74	-32.46
Middle Channel							
1924.99	123.21	PK	H	-13.19	110.02	/	/
1924.99	111.27	PK	V	-13.19	98.08	/	/
3849.98	52.04	PK	H	-10.01	42.03	74	-31.97
3849.98	51.95	PK	V	-10.01	41.94	74	-32.06
High Channel							
1928.45	123.44	PK	H	-13.17	110.27	/	/
1928.45	110.16	PK	V	-13.17	96.99	/	/
3856.90	52.19	PK	H	-9.98	42.21	74	-31.79
3856.90	52.05	PK	V	-9.98	42.07	74	-31.93

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

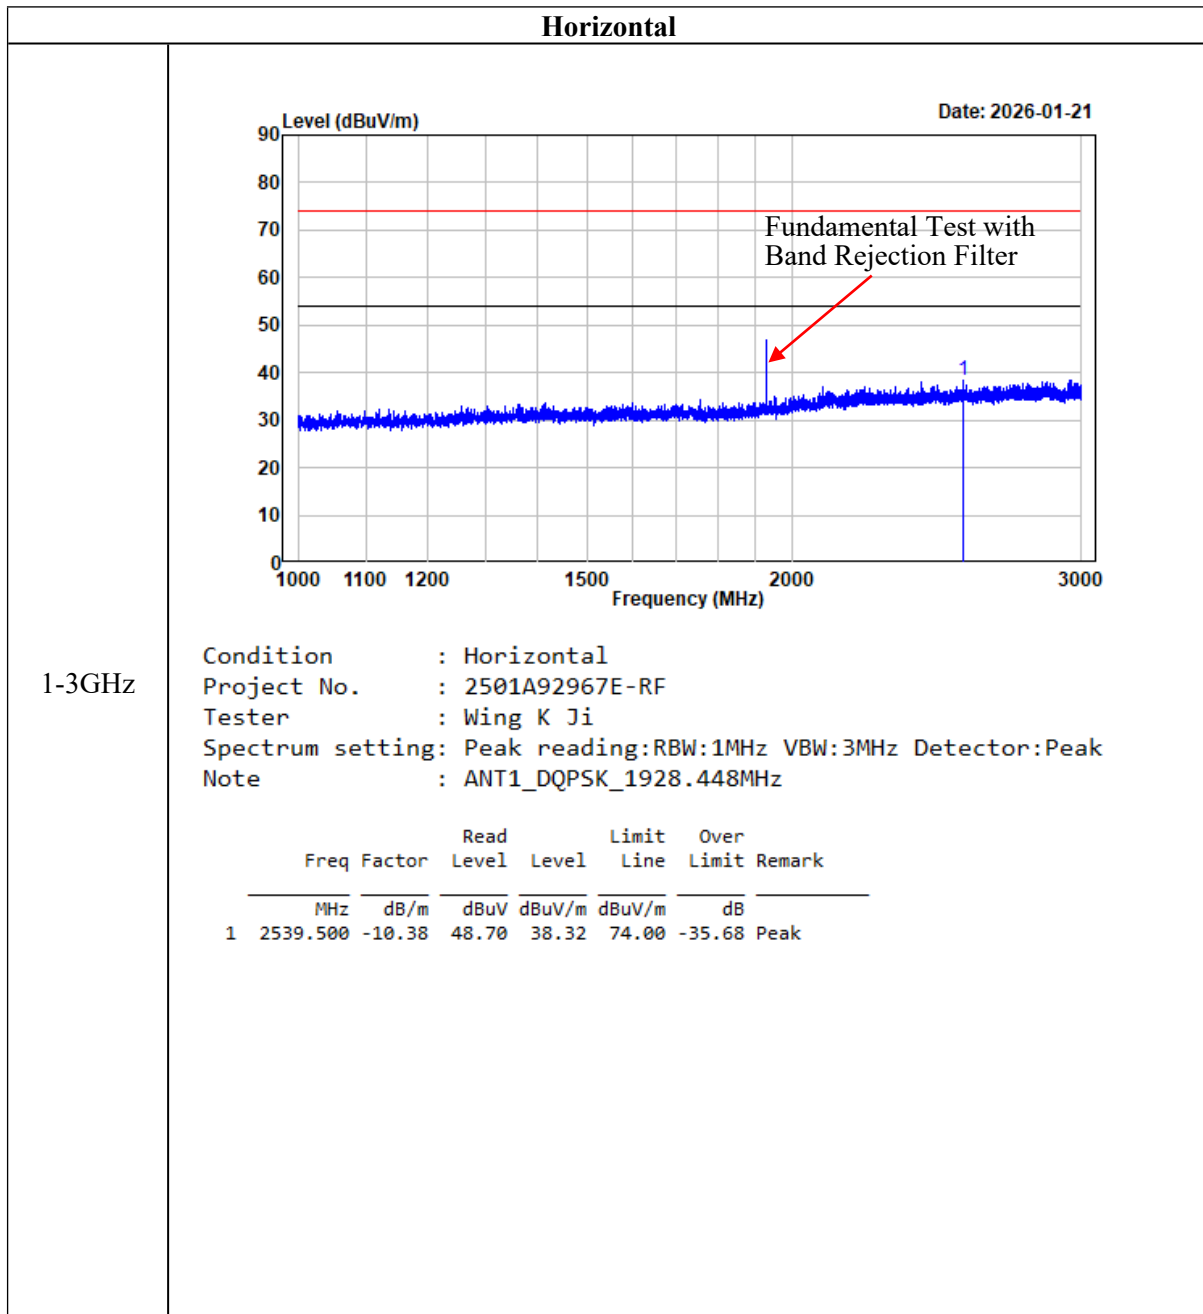

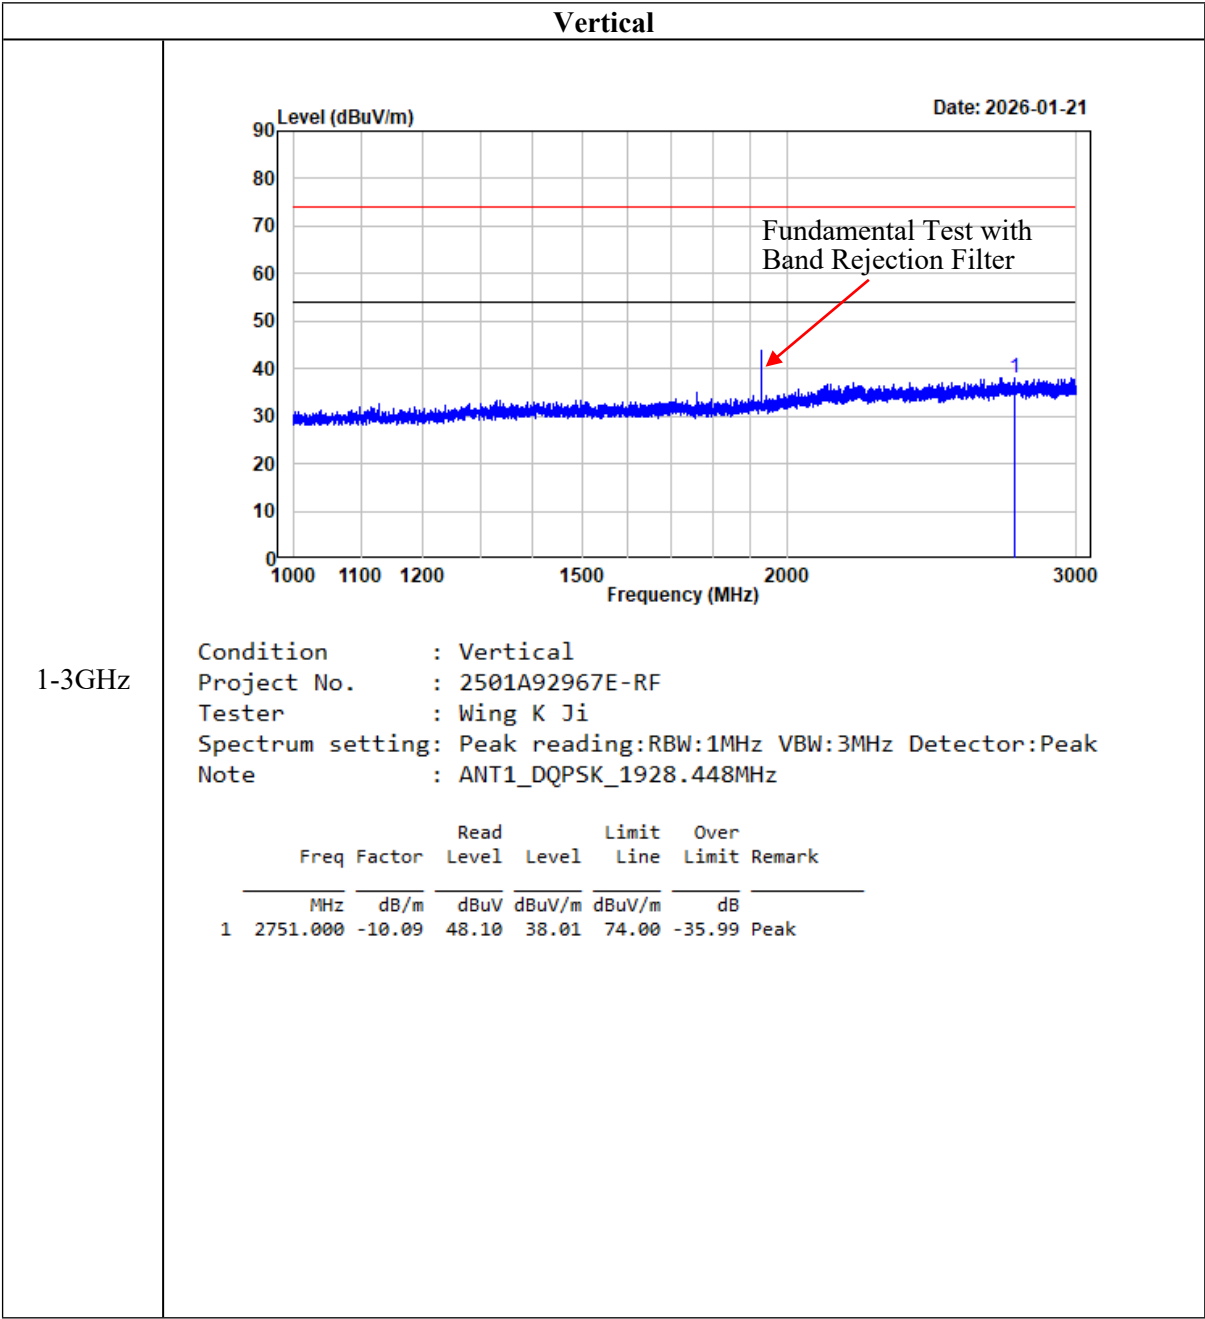


Horizontal Peak

3-18GHz

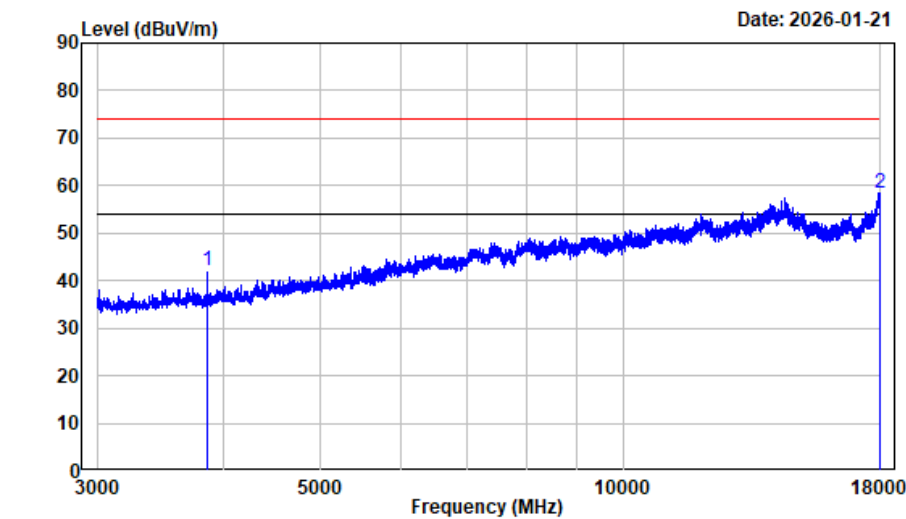


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_DQPSK_1928.448MHz

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3856.900	-9.98	52.19	42.21	74.00	-31.79	Peak
2 17968.130	9.42	49.12	58.54	74.00	-15.46	Peak

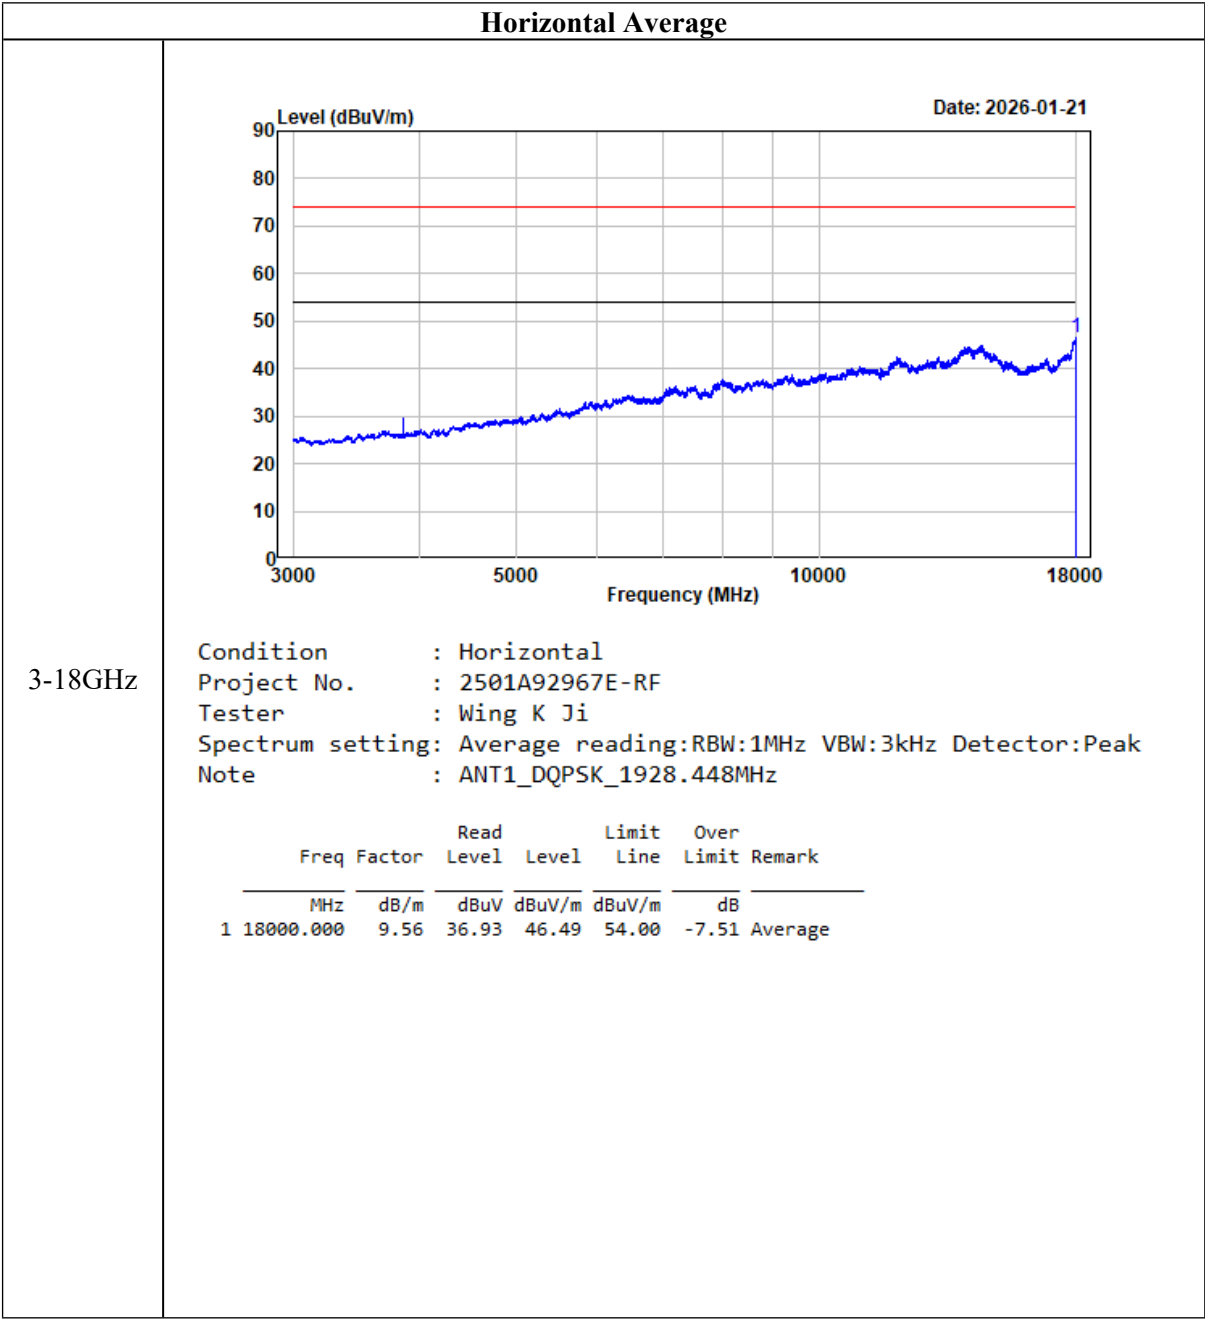


Vertical Peak


3-18GHz

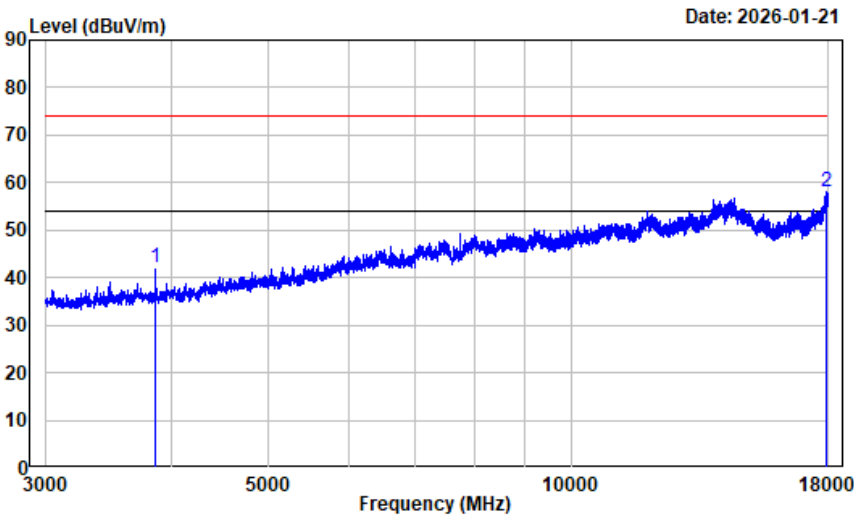

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_DQPSK_1928.448MHz


Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3856.900	-9.98	52.05	42.07	74.00	-31.93	Peak
2	17945.630	9.31	48.62	57.93	74.00	-16.07	Peak

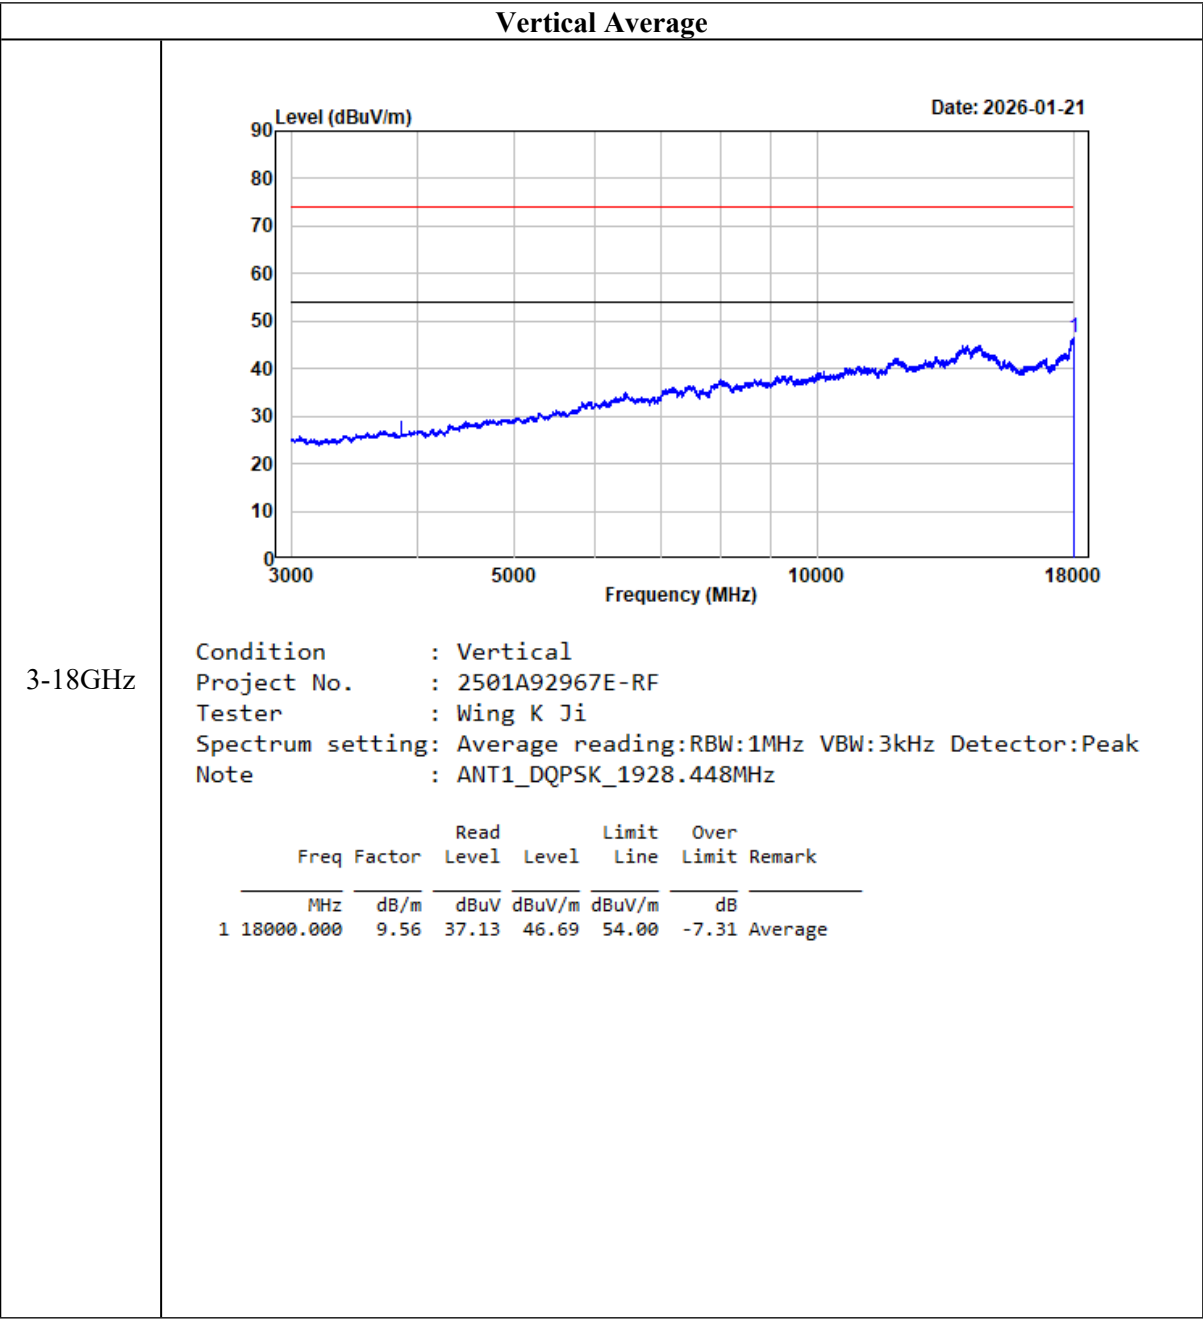

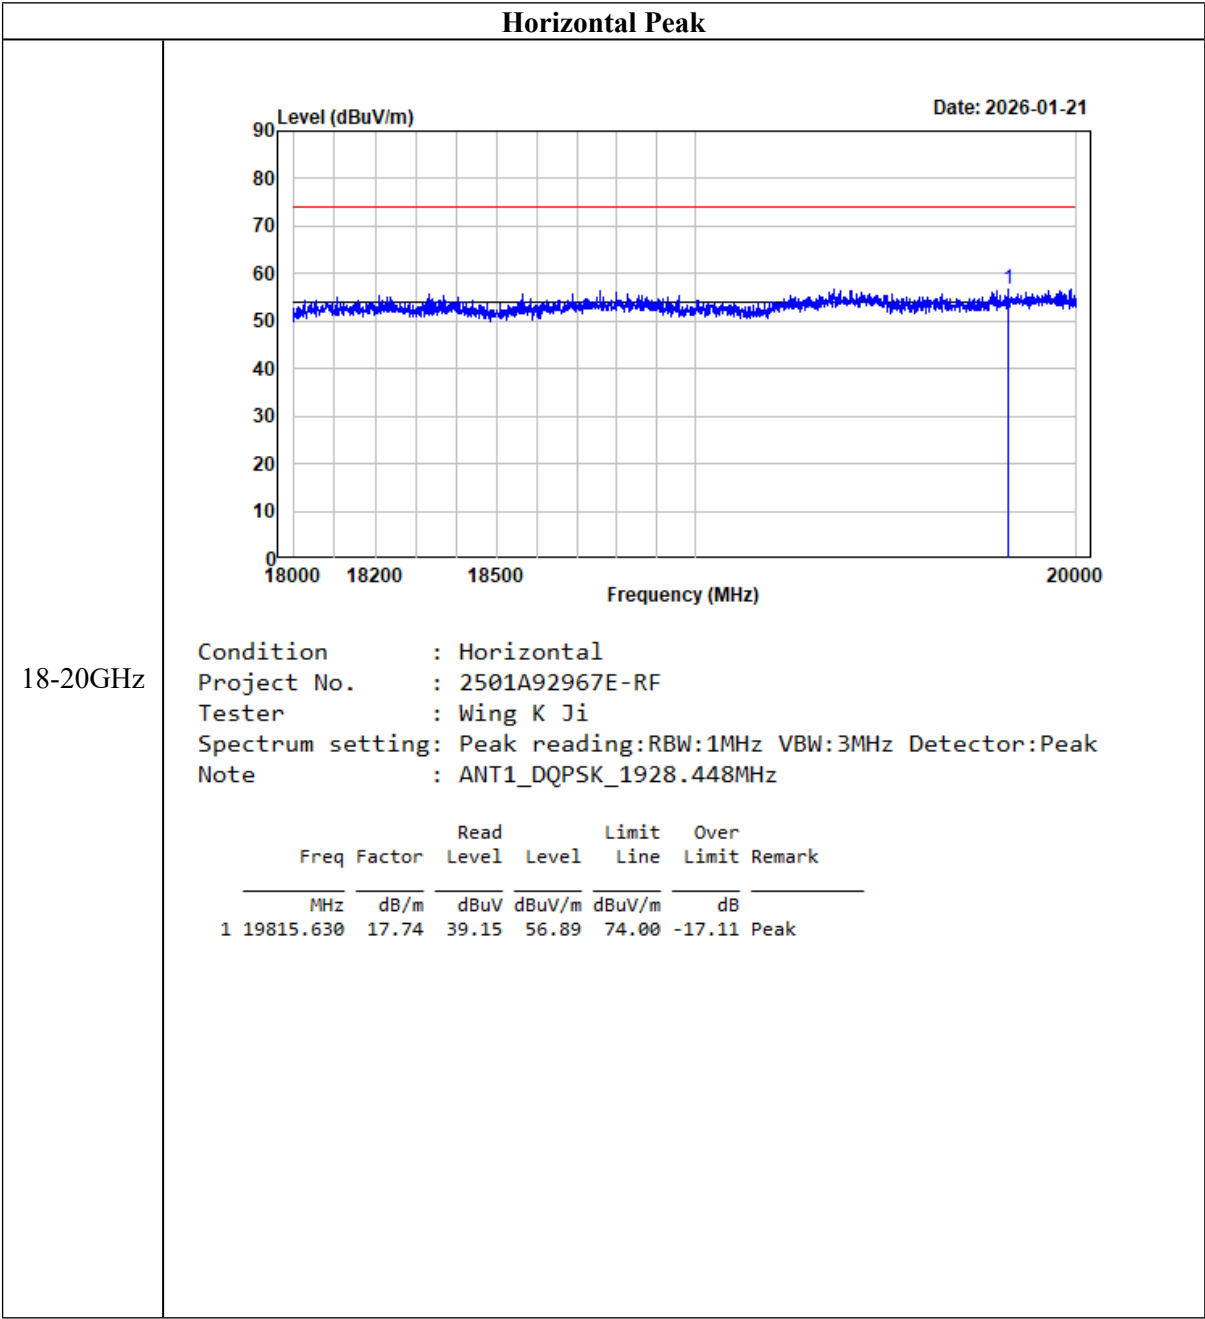


Horizontal Average


18-20GHz

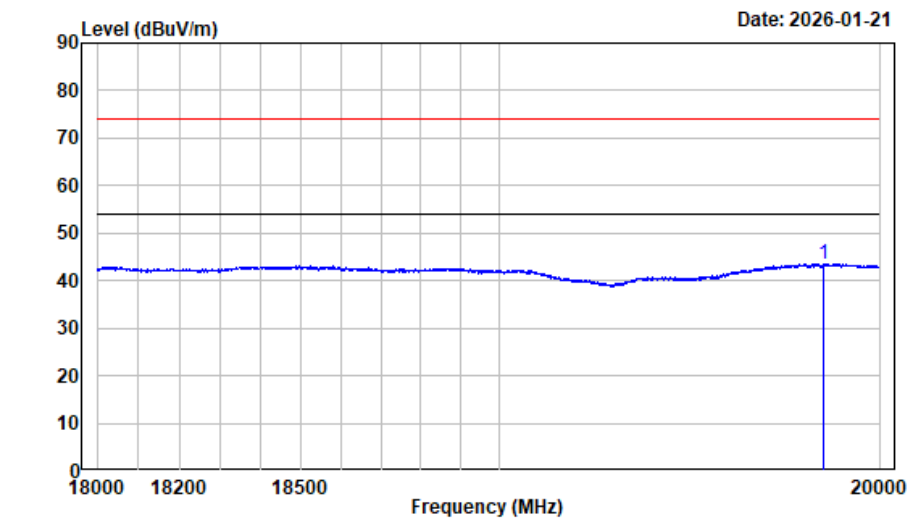

Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT1_DQPSK_1928.448MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19847.130	17.77	25.74	43.51	54.00	-10.49	Average

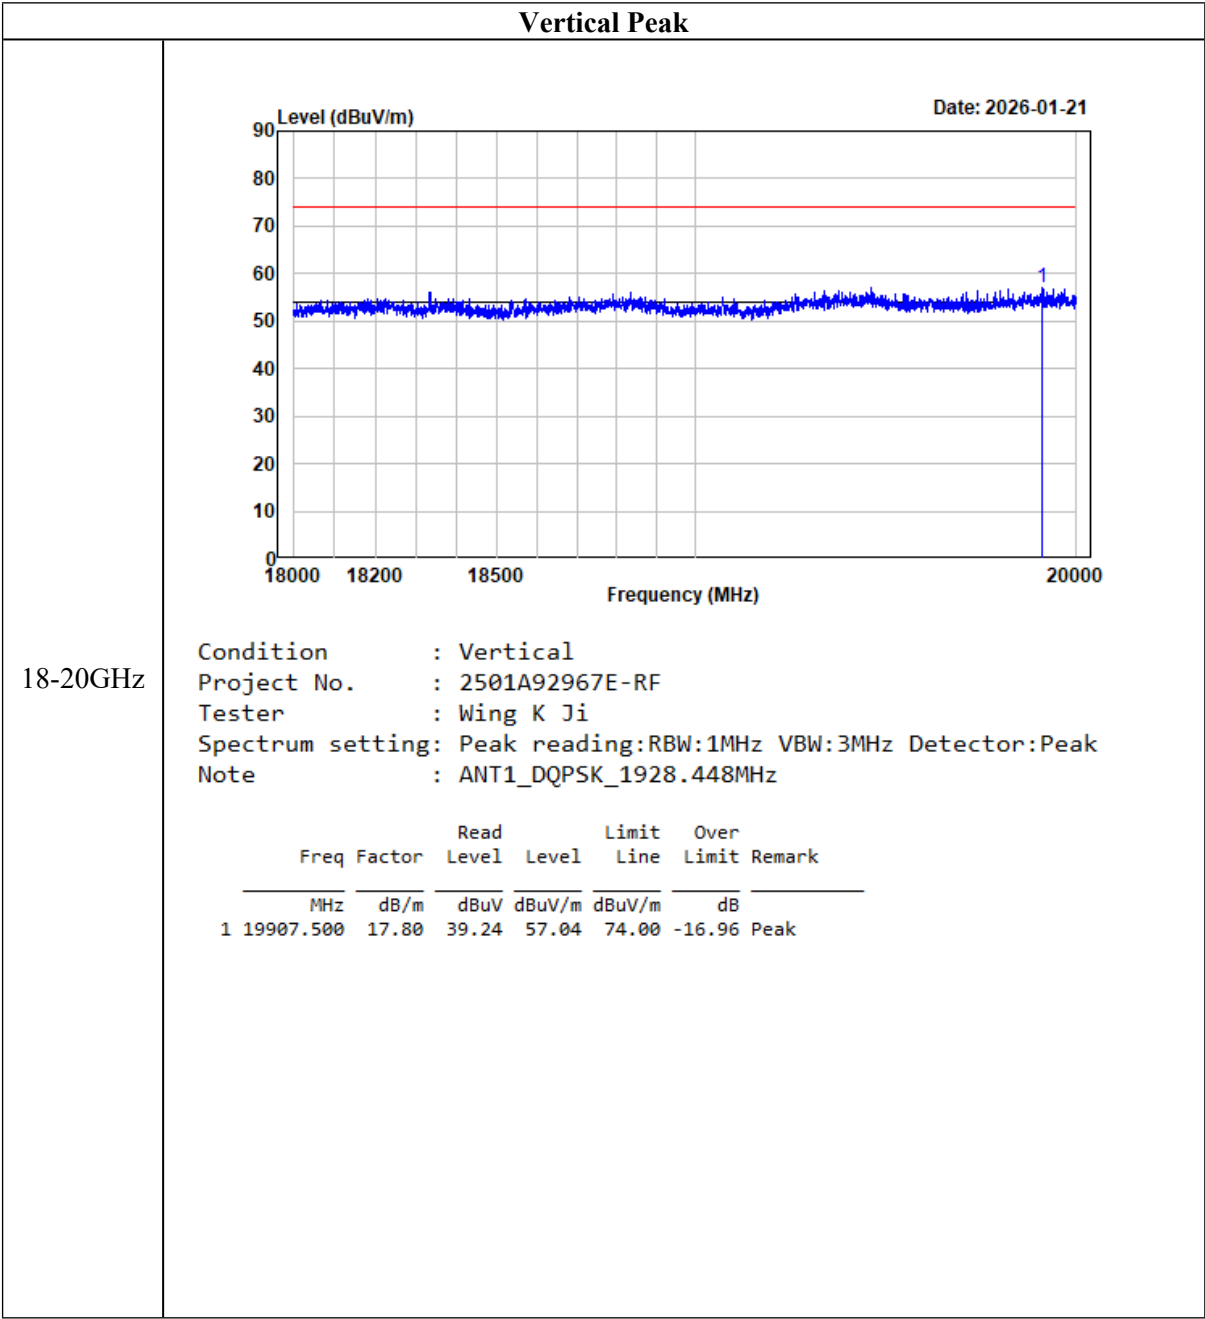

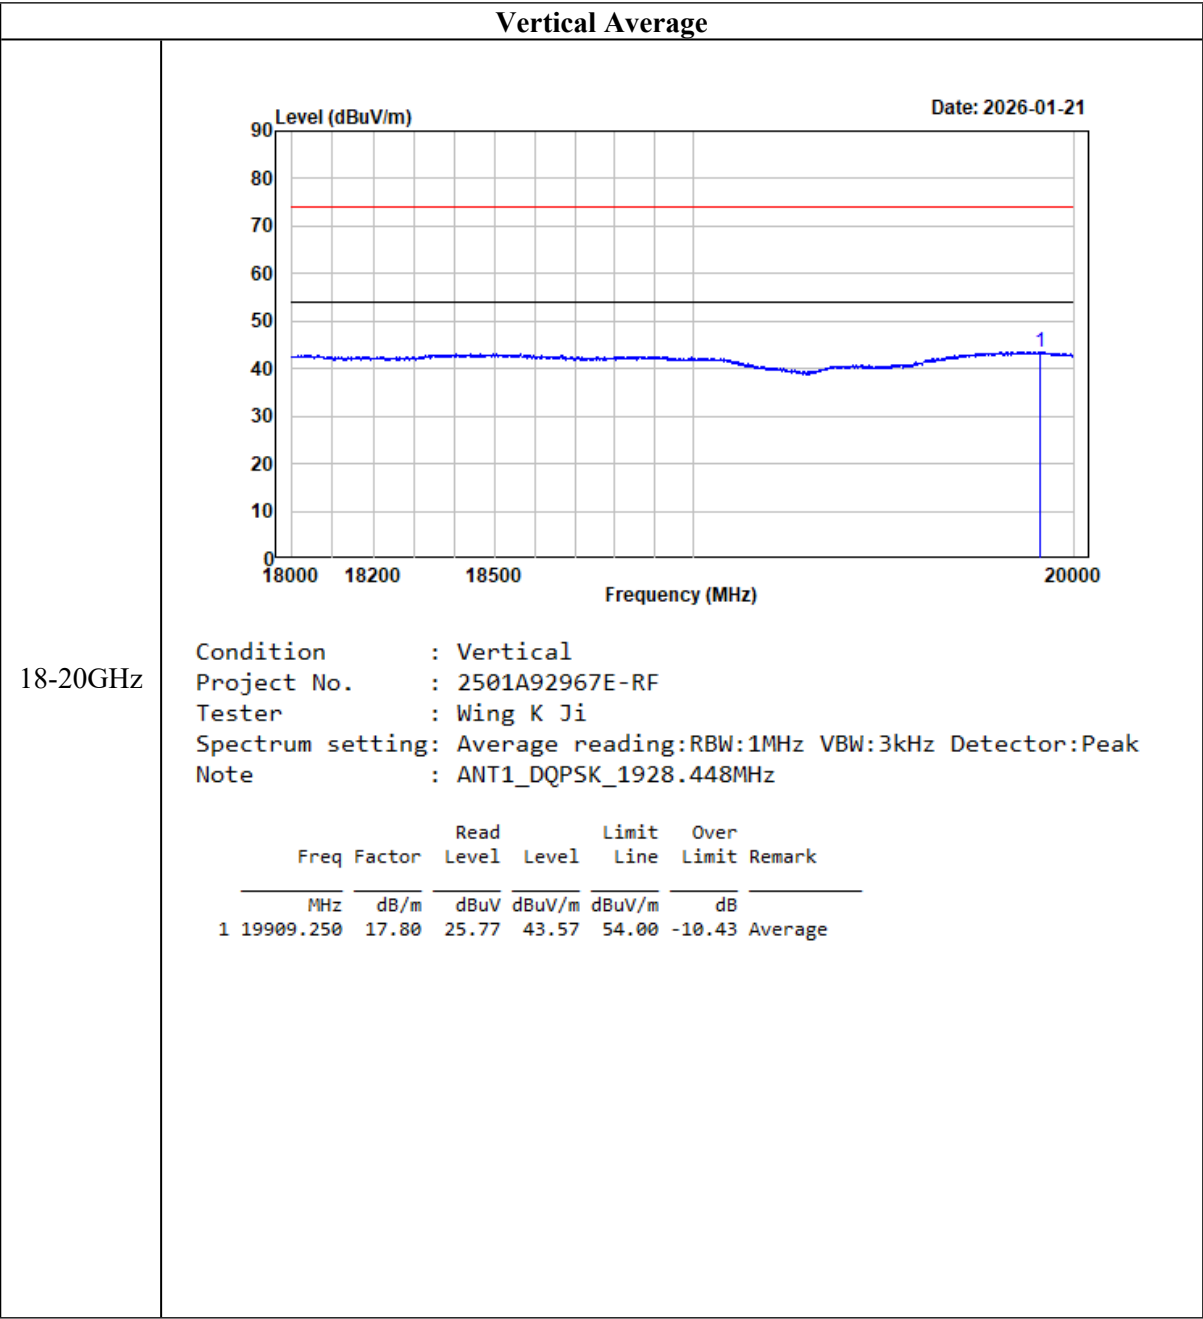

$\pi/8$ -D8PSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	123.49	PK	H	-13.22	110.27	/	/
1921.54	111.52	PK	V	-13.22	98.30	/	/
3843.07	52.06	PK	H	-10.00	42.06	74	-31.94
3843.07	51.93	PK	V	-10.00	41.93	74	-32.07
Middle Channel							
1924.99	122.89	PK	H	-13.19	109.70	/	/
1924.99	111.88	PK	V	-13.19	98.69	/	/
3849.98	51.84	PK	H	-10.01	41.83	74	-32.17
3849.98	51.61	PK	V	-10.01	41.60	74	-32.40
High Channel							
1928.45	123.95	PK	H	-13.17	110.78	/	/
1928.45	109.91	PK	V	-13.17	96.74	/	/
3856.90	52.25	PK	H	-9.98	42.27	74	-31.73
3856.90	52.08	PK	V	-9.98	42.10	74	-31.90

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

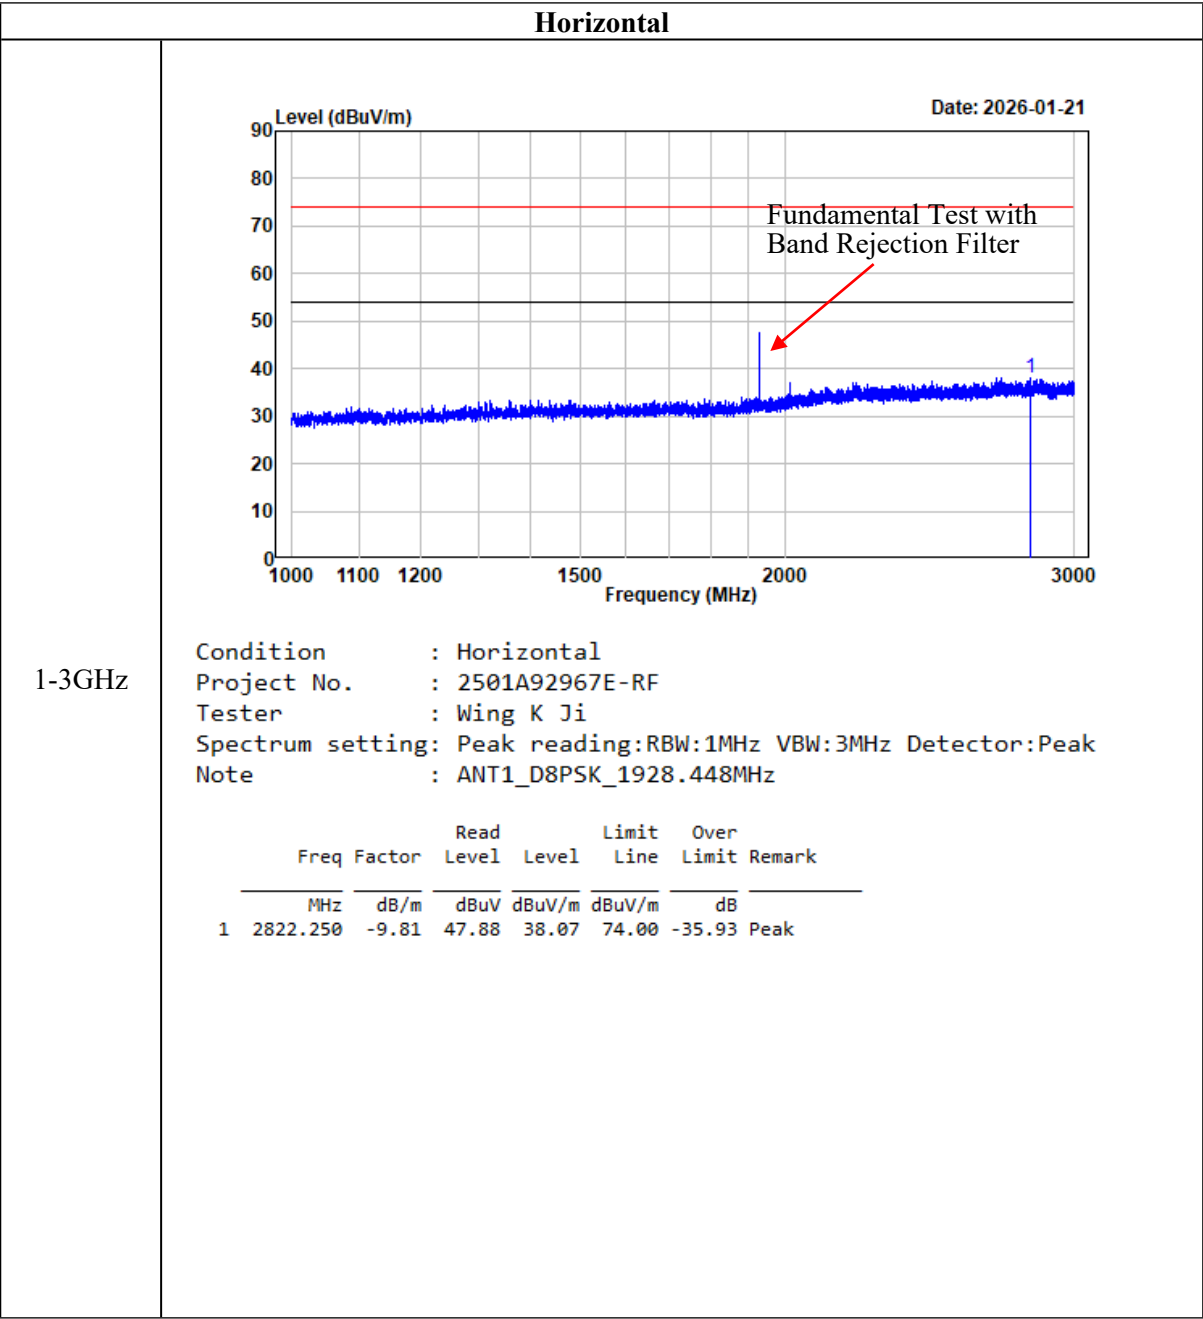

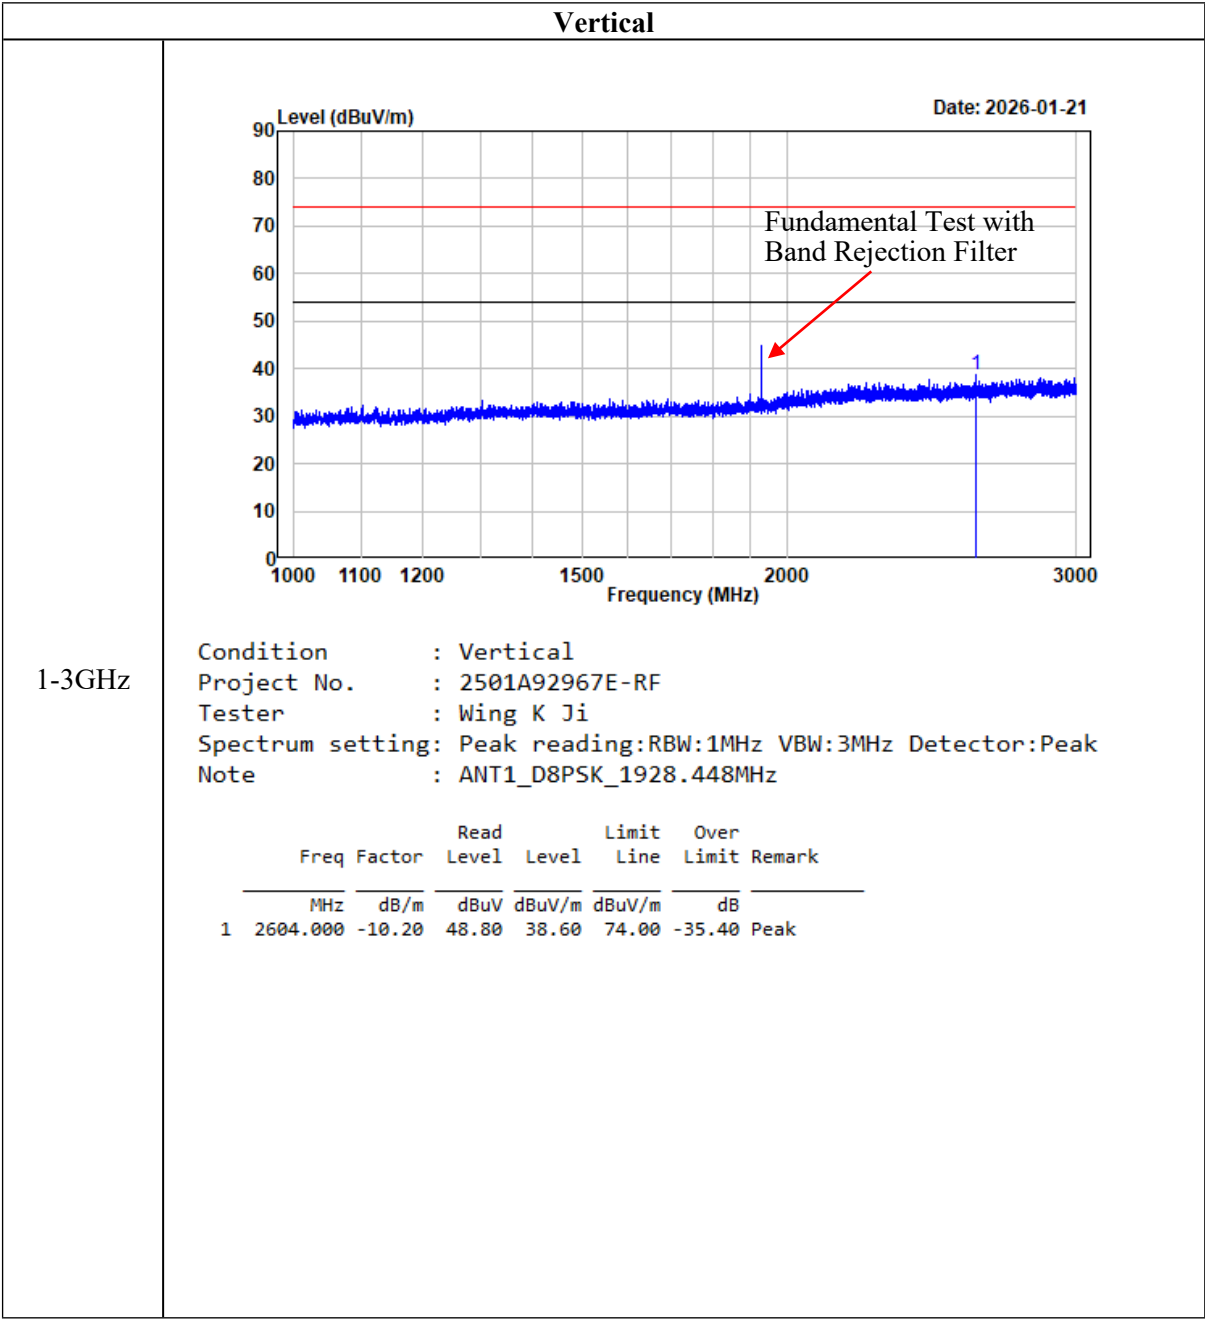


Horizontal Peak

3-18GHz

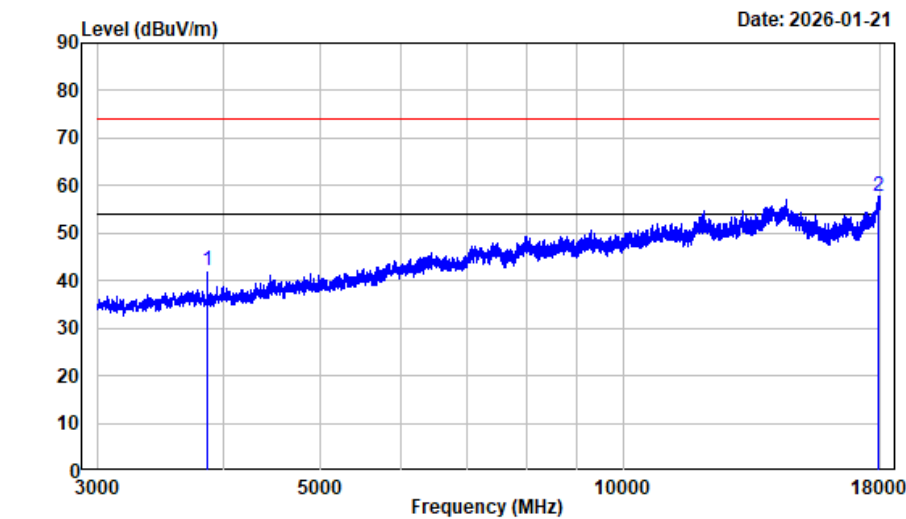


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_D8PSK_1928.448MHz

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3856.900	-9.98	52.25	42.27	74.00	-31.73	Peak
2 17943.750	9.31	48.53	57.84	74.00	-16.16	Peak

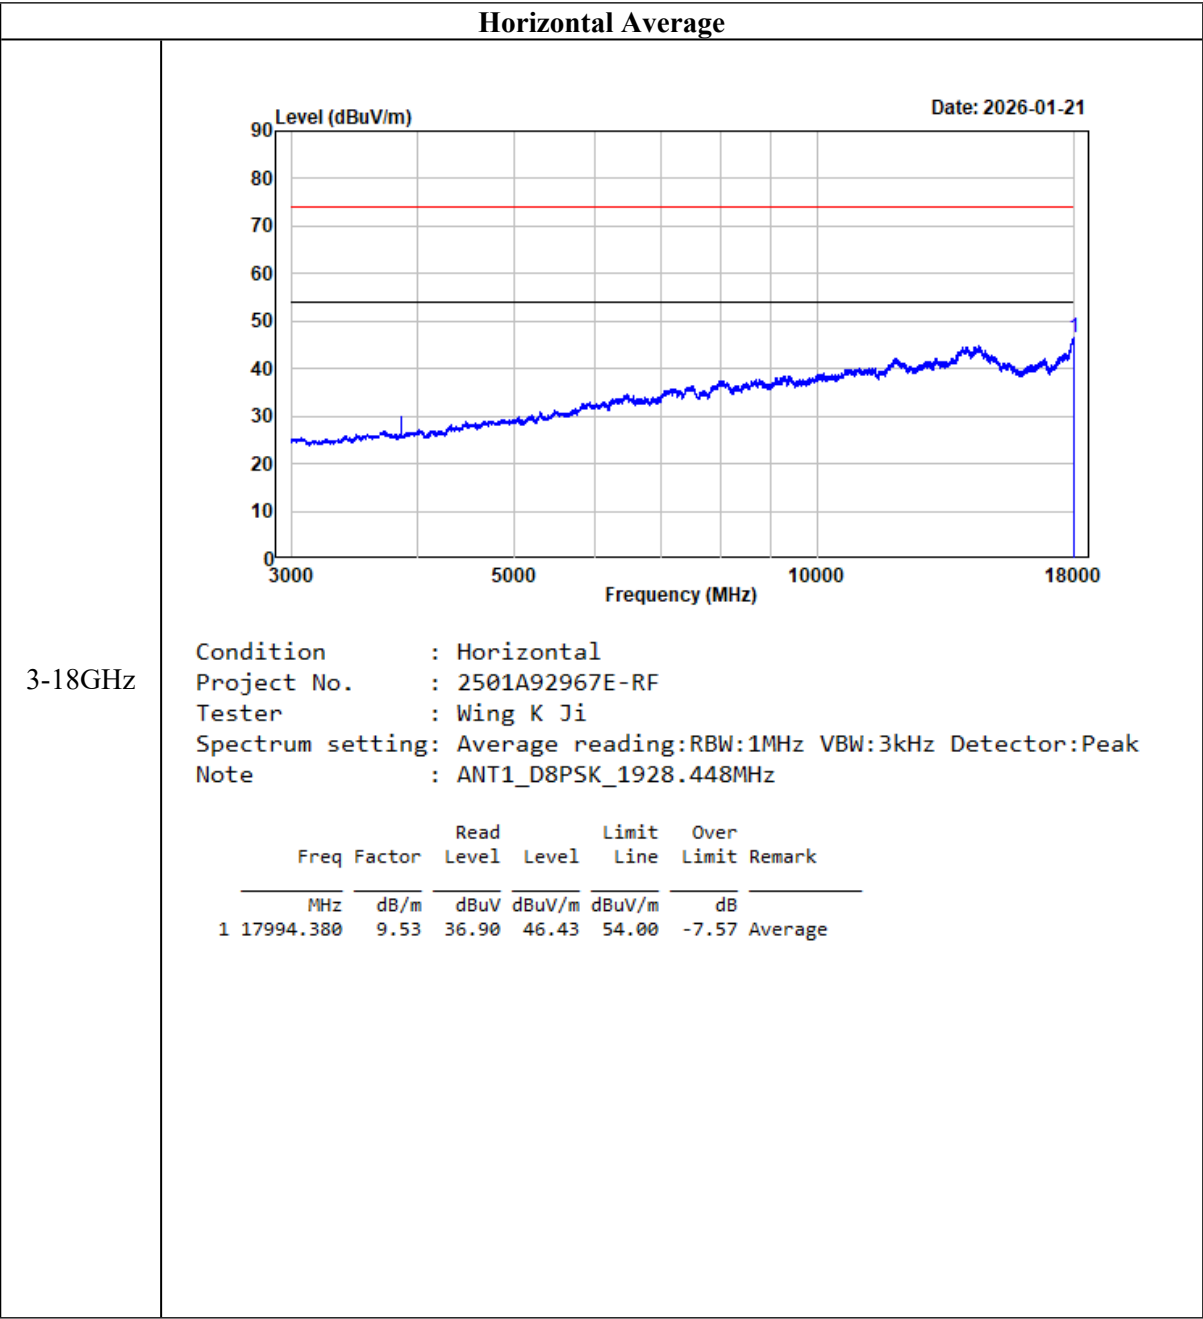


Vertical Peak


3-18GHz

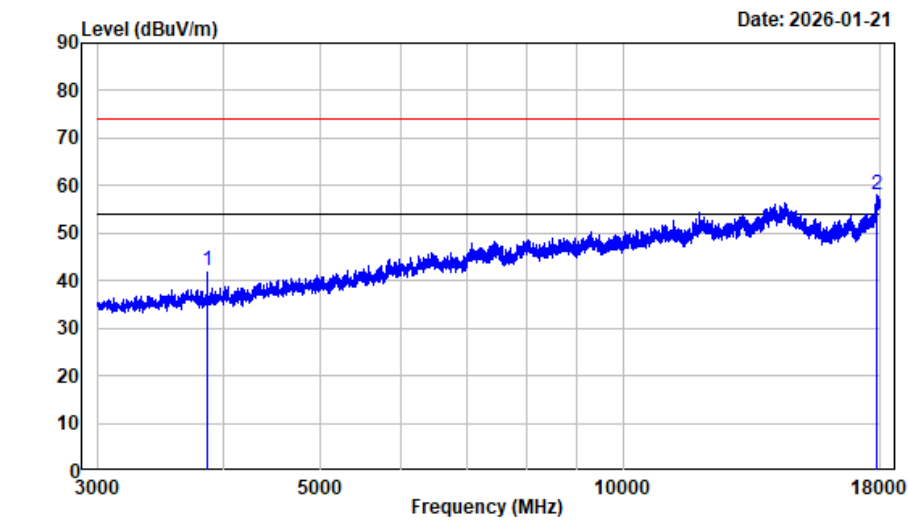



Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT1_D8PSK_1928.448MHz


		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3856.900	-9.98	52.08	42.10	74.00	-31.90	Peak
2 17876.250	8.66	49.26	57.92	74.00	-16.08	Peak

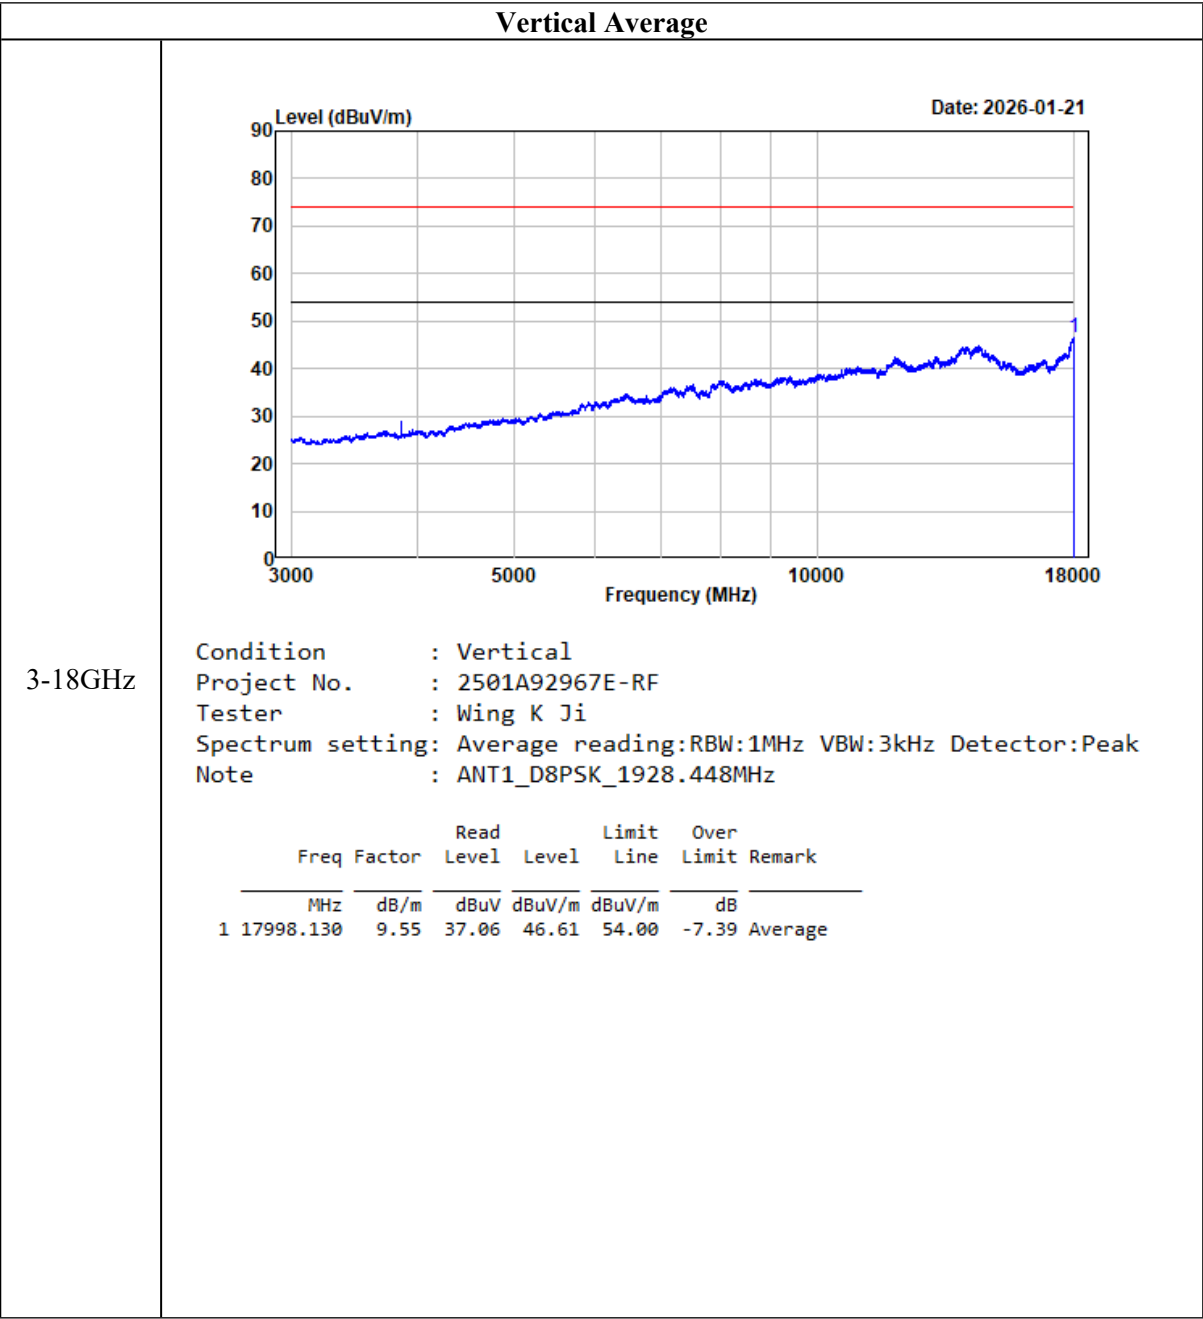

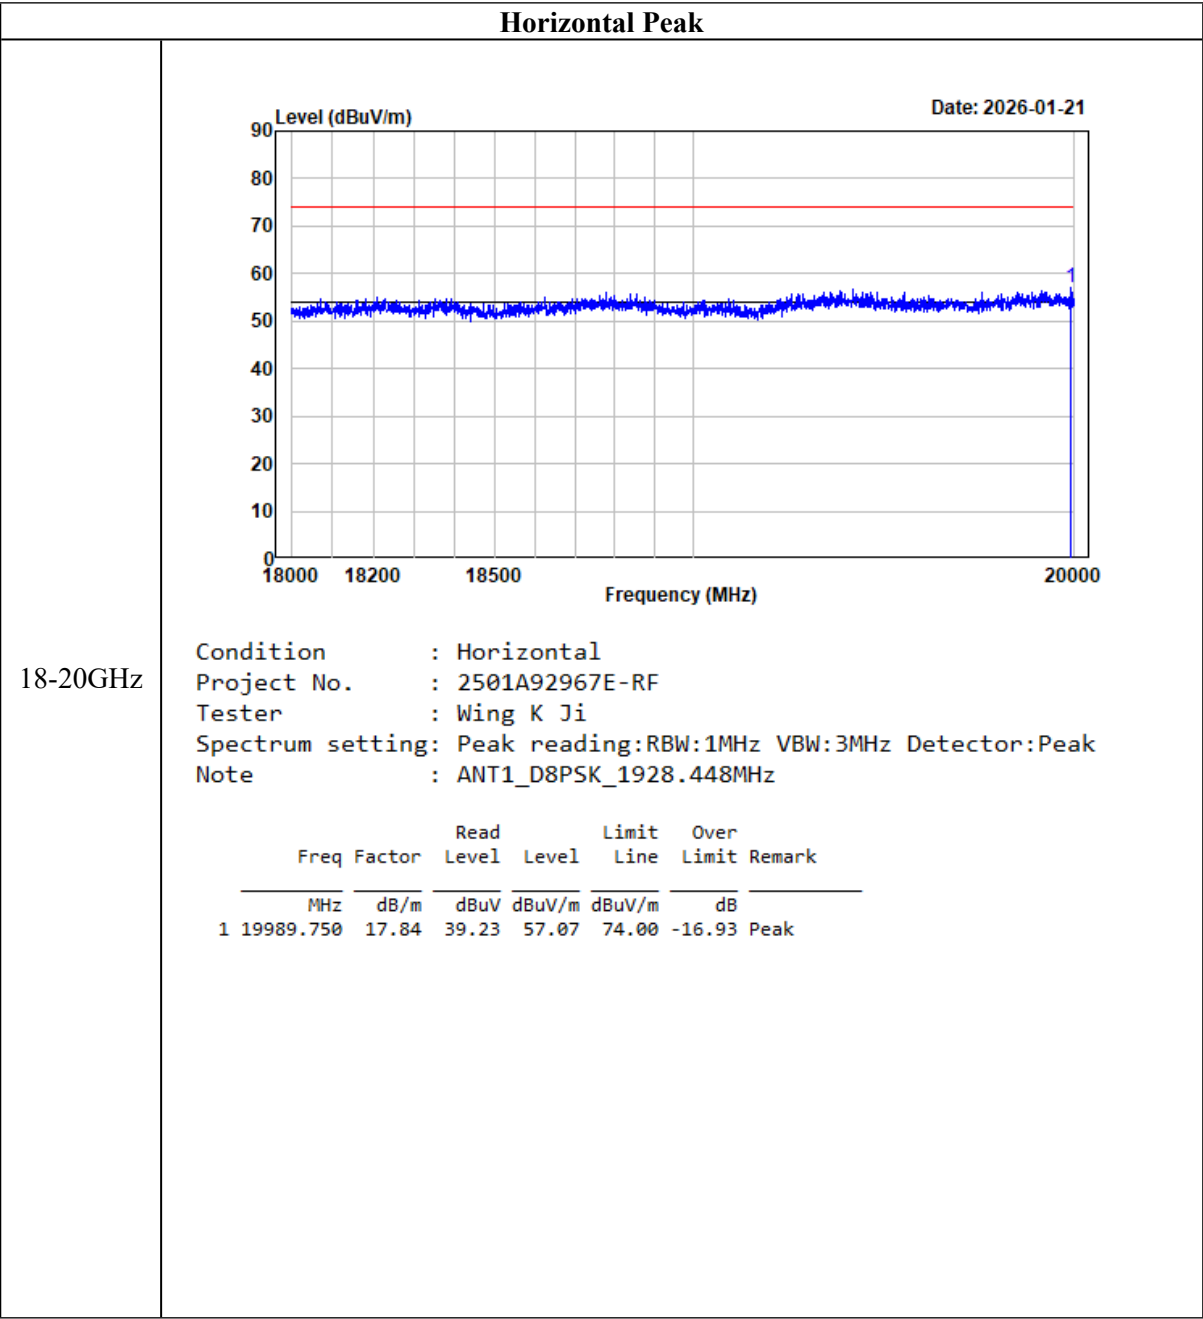

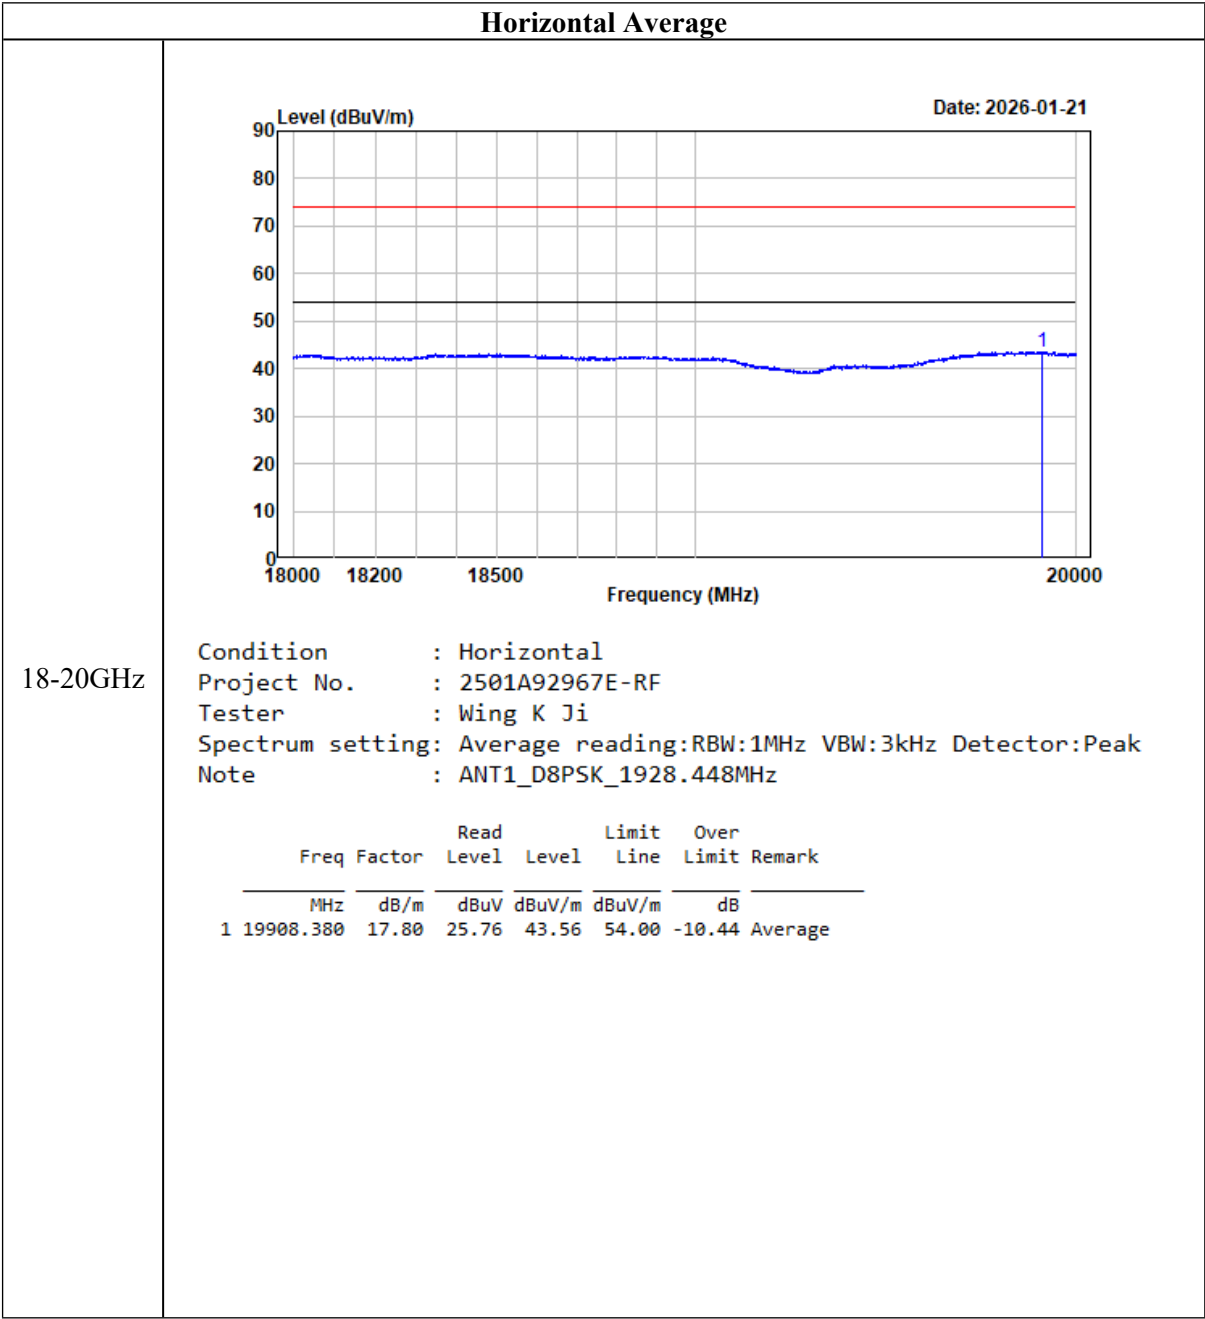

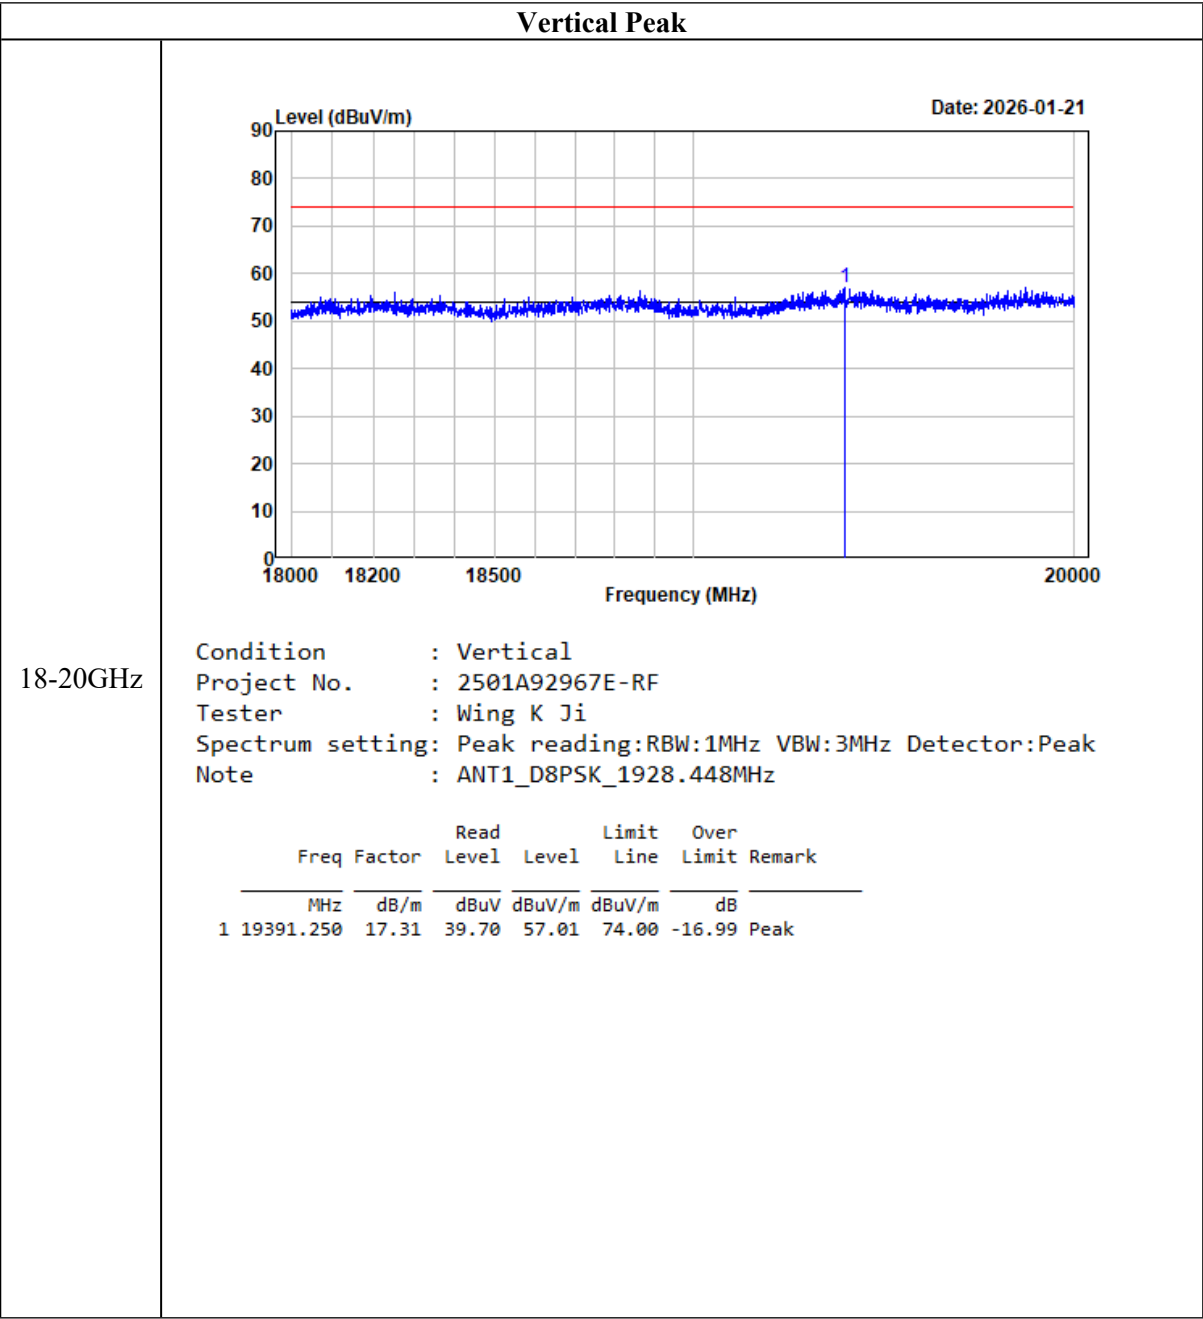

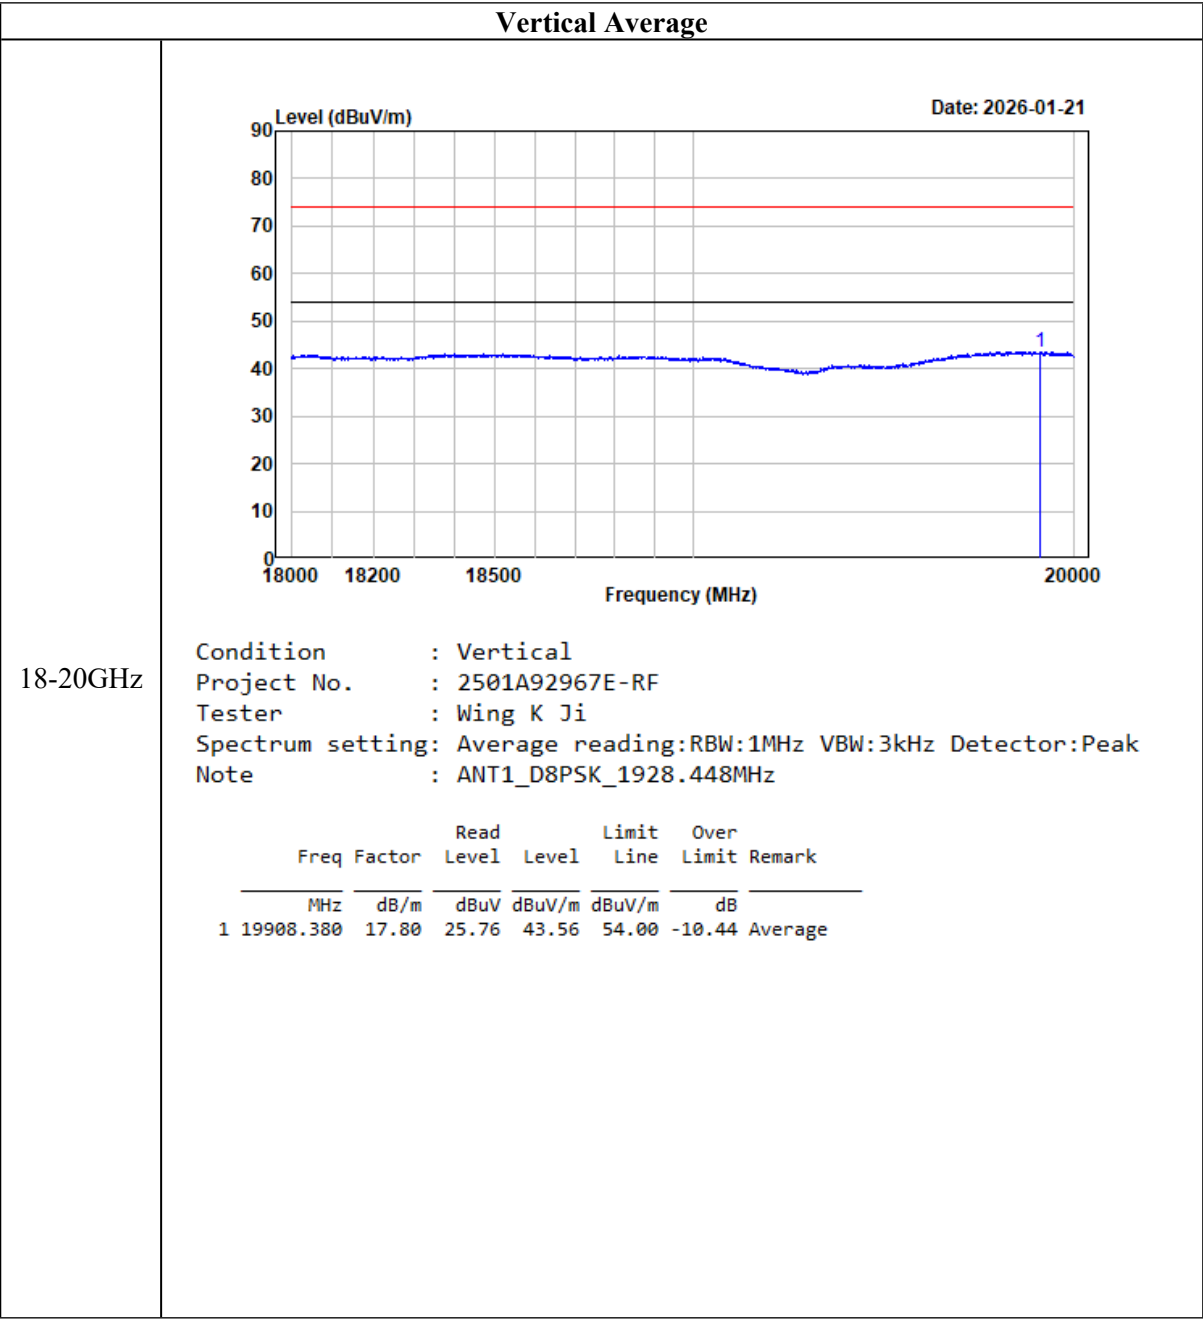

ANT2:**GFSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	126.04	PK	H	-13.22	112.82	/	/
1921.54	112.94	PK	V	-13.22	99.72	/	/
3843.07	51.89	PK	H	-10.00	41.89	74	-32.11
3843.07	51.69	PK	V	-10.00	41.69	74	-32.31
Middle Channel							
1924.99	124.14	PK	H	-13.19	110.95	/	/
1924.99	114.20	PK	V	-13.19	101.01	/	/
3849.98	52.07	PK	H	-10.01	42.06	74	-31.94
3849.98	51.53	PK	V	-10.01	41.52	74	-32.48
High Channel							
1928.45	123.62	PK	H	-13.17	110.45	/	/
1928.45	112.26	PK	V	-13.17	99.09	/	/
3856.90	51.88	PK	H	-9.98	41.90	74	-32.10
3856.90	51.63	PK	V	-9.98	41.65	74	-32.35

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

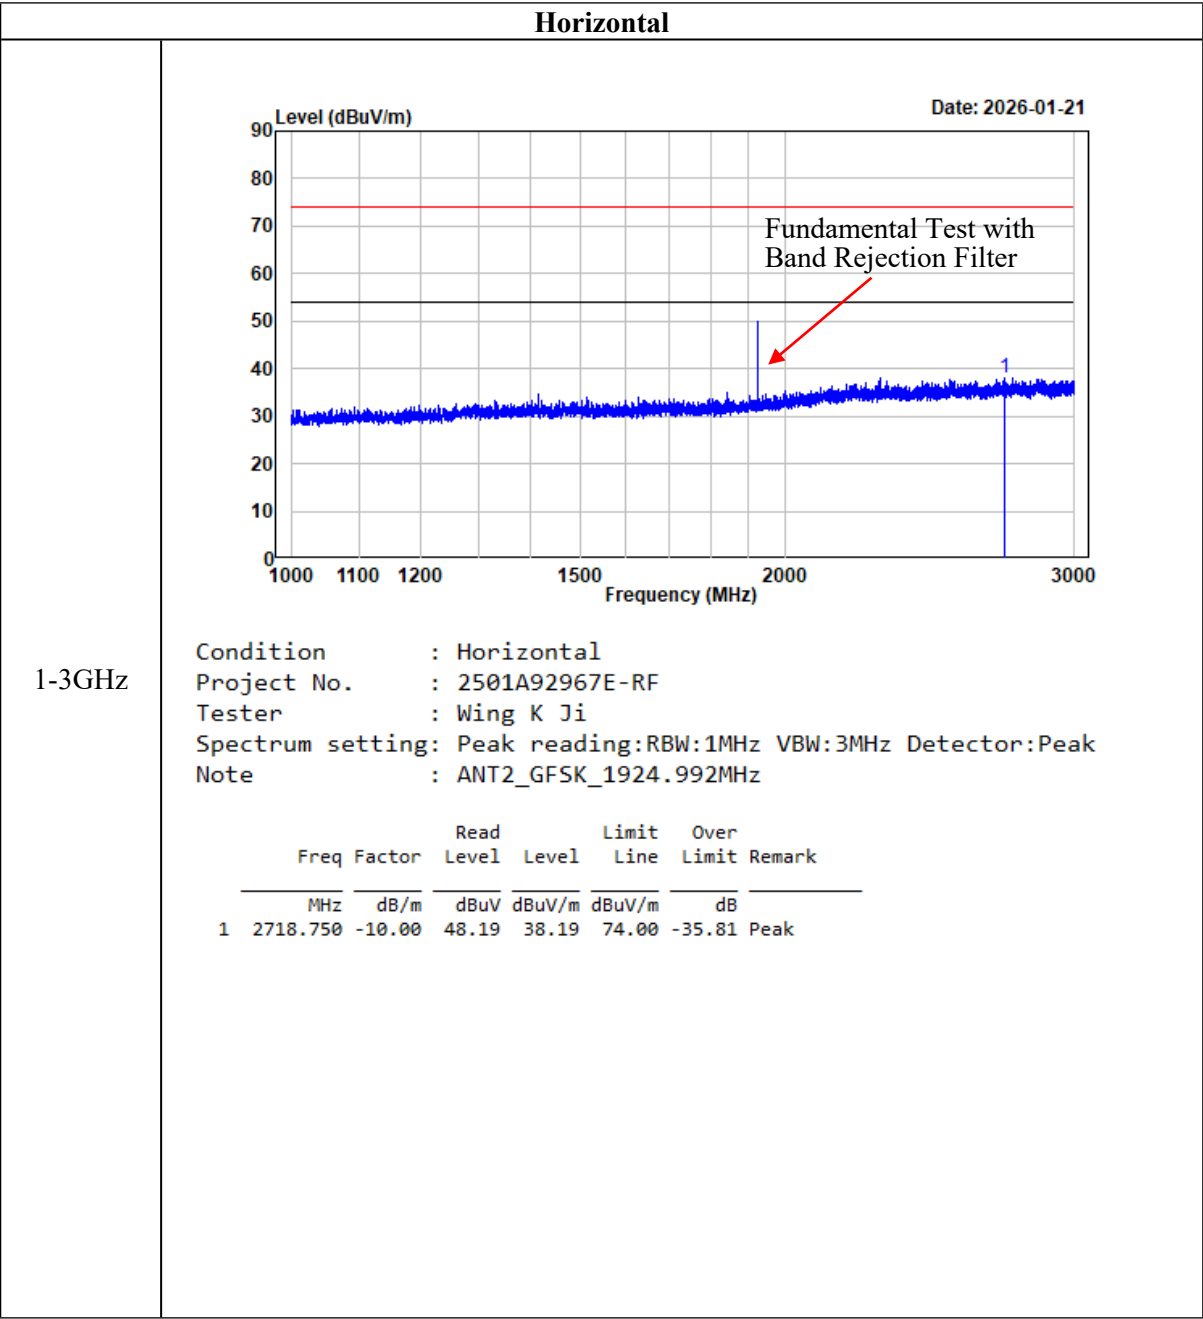

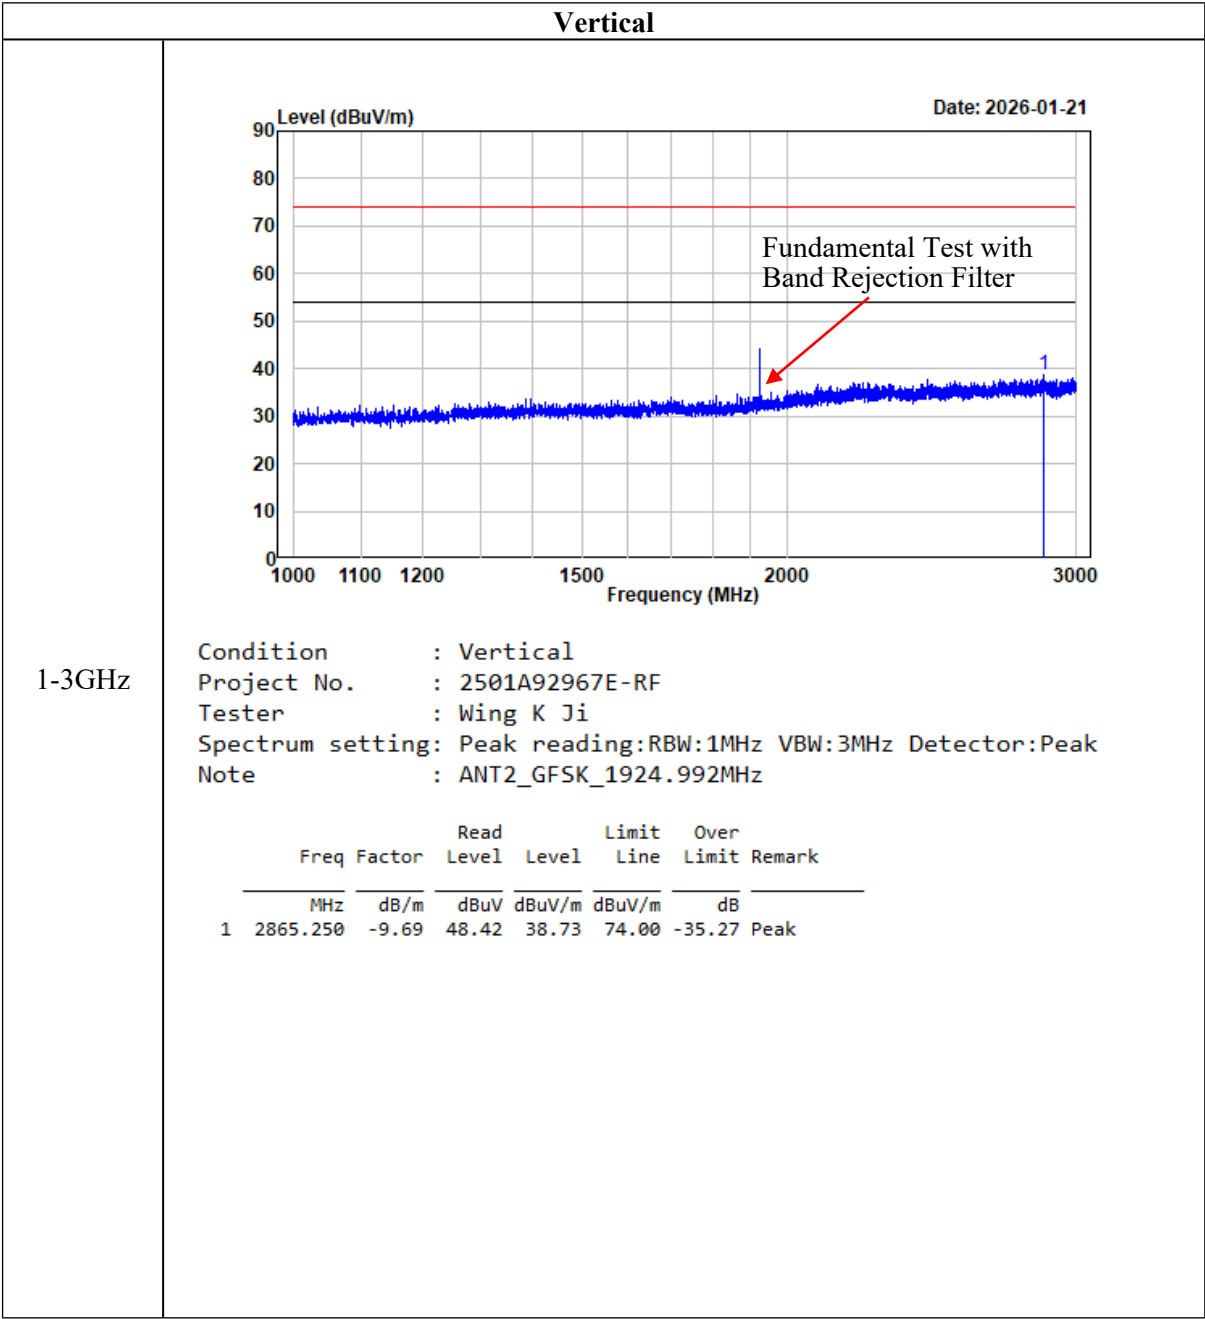


Horizontal Peak

3-18GHz

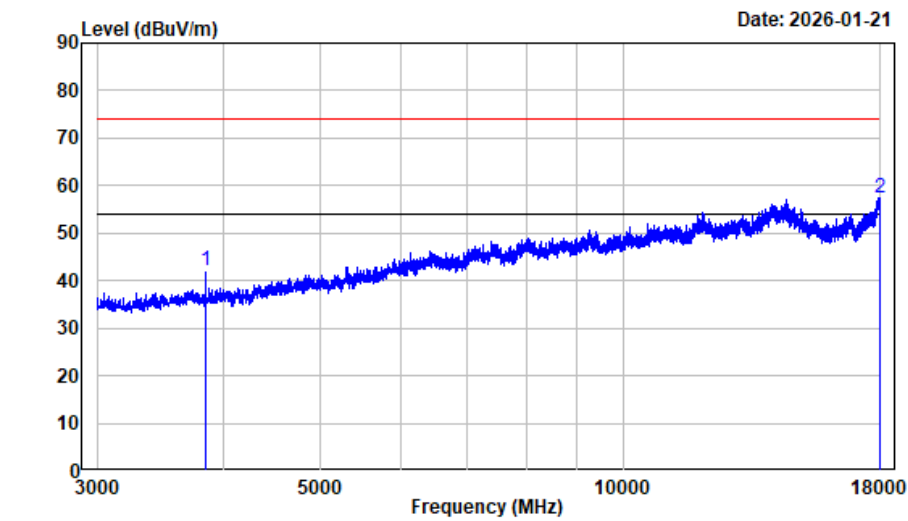


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT2_GFSK_1924.992MHz

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3849.980	-10.01	52.07	42.06	74.00	-31.94	Peak
2 17970.000	9.42	48.05	57.47	74.00	-16.53	Peak

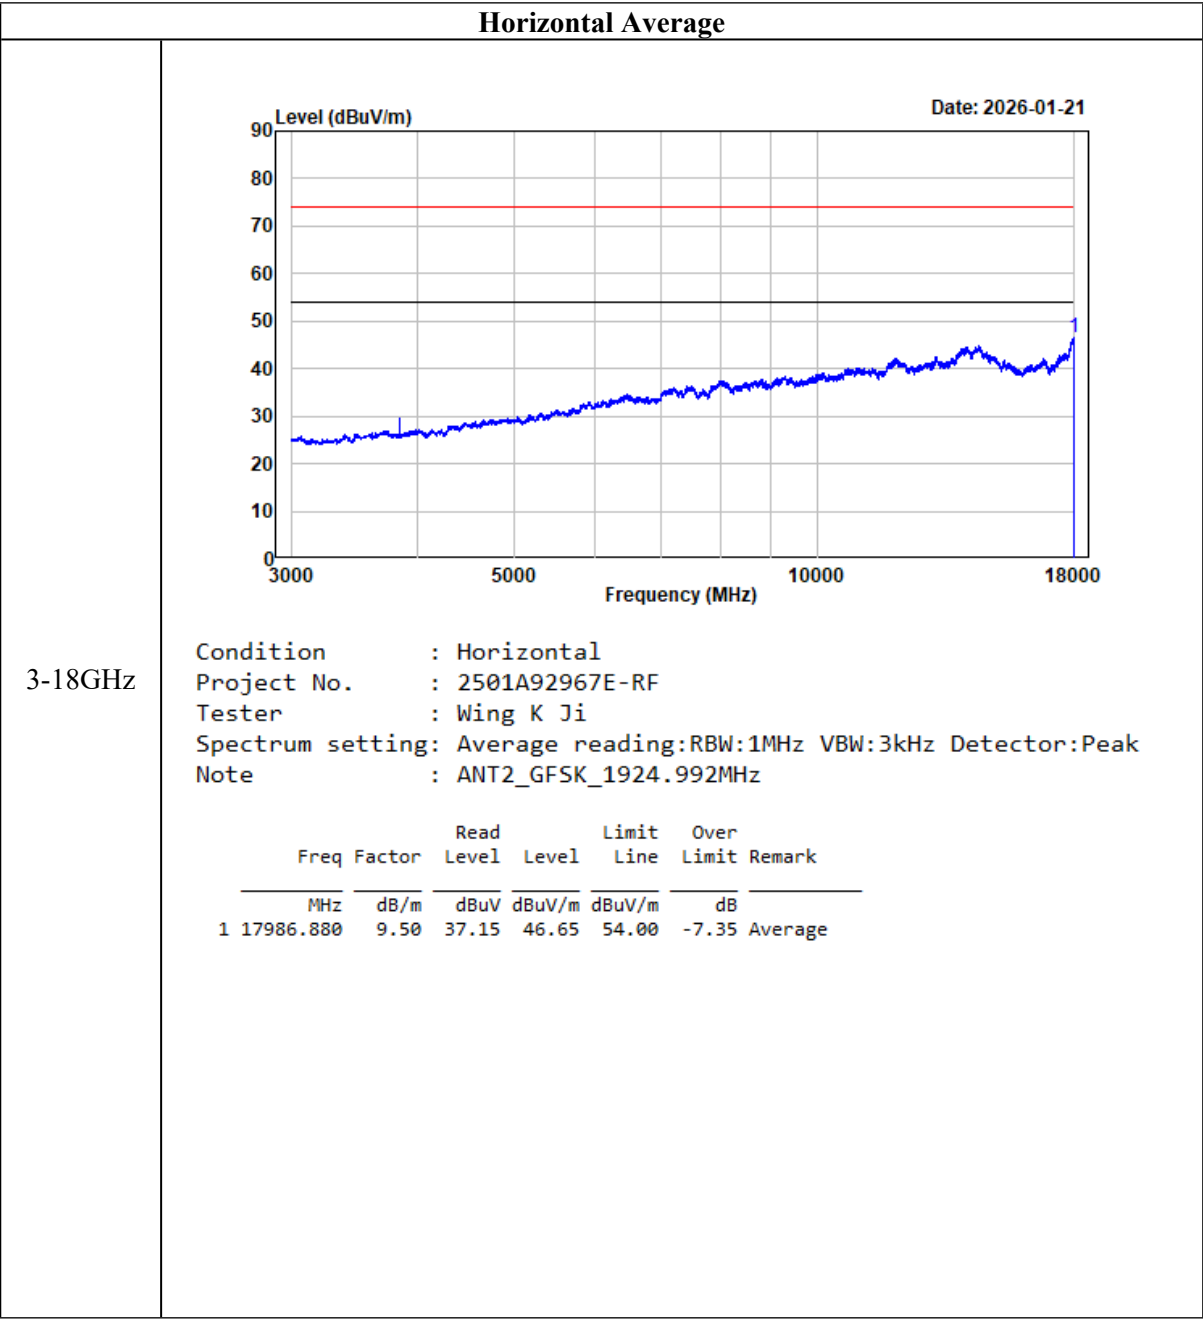


Vertical Peak


3-18GHz

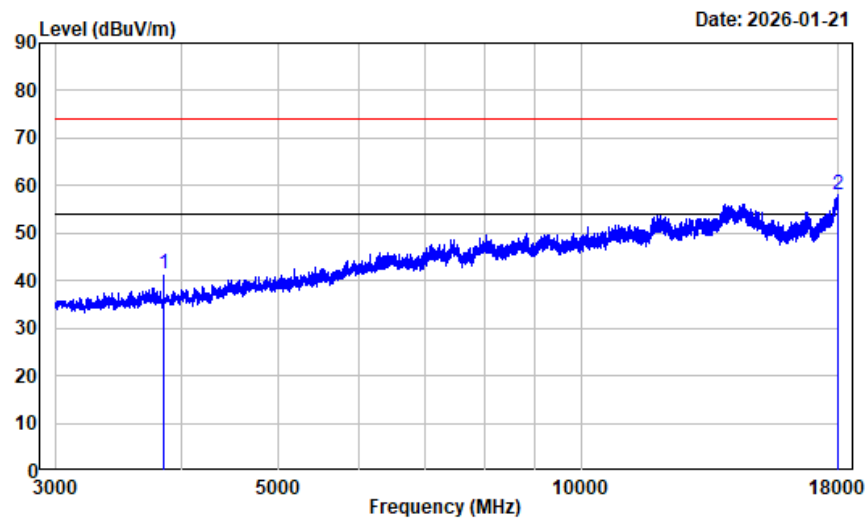

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT2_GFSK_1924.992MHz


		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3849.980	-10.01	51.53	41.52	74.00	-32.48	Peak
2 17977.500	9.45	48.52	57.97	74.00	-16.03	Peak

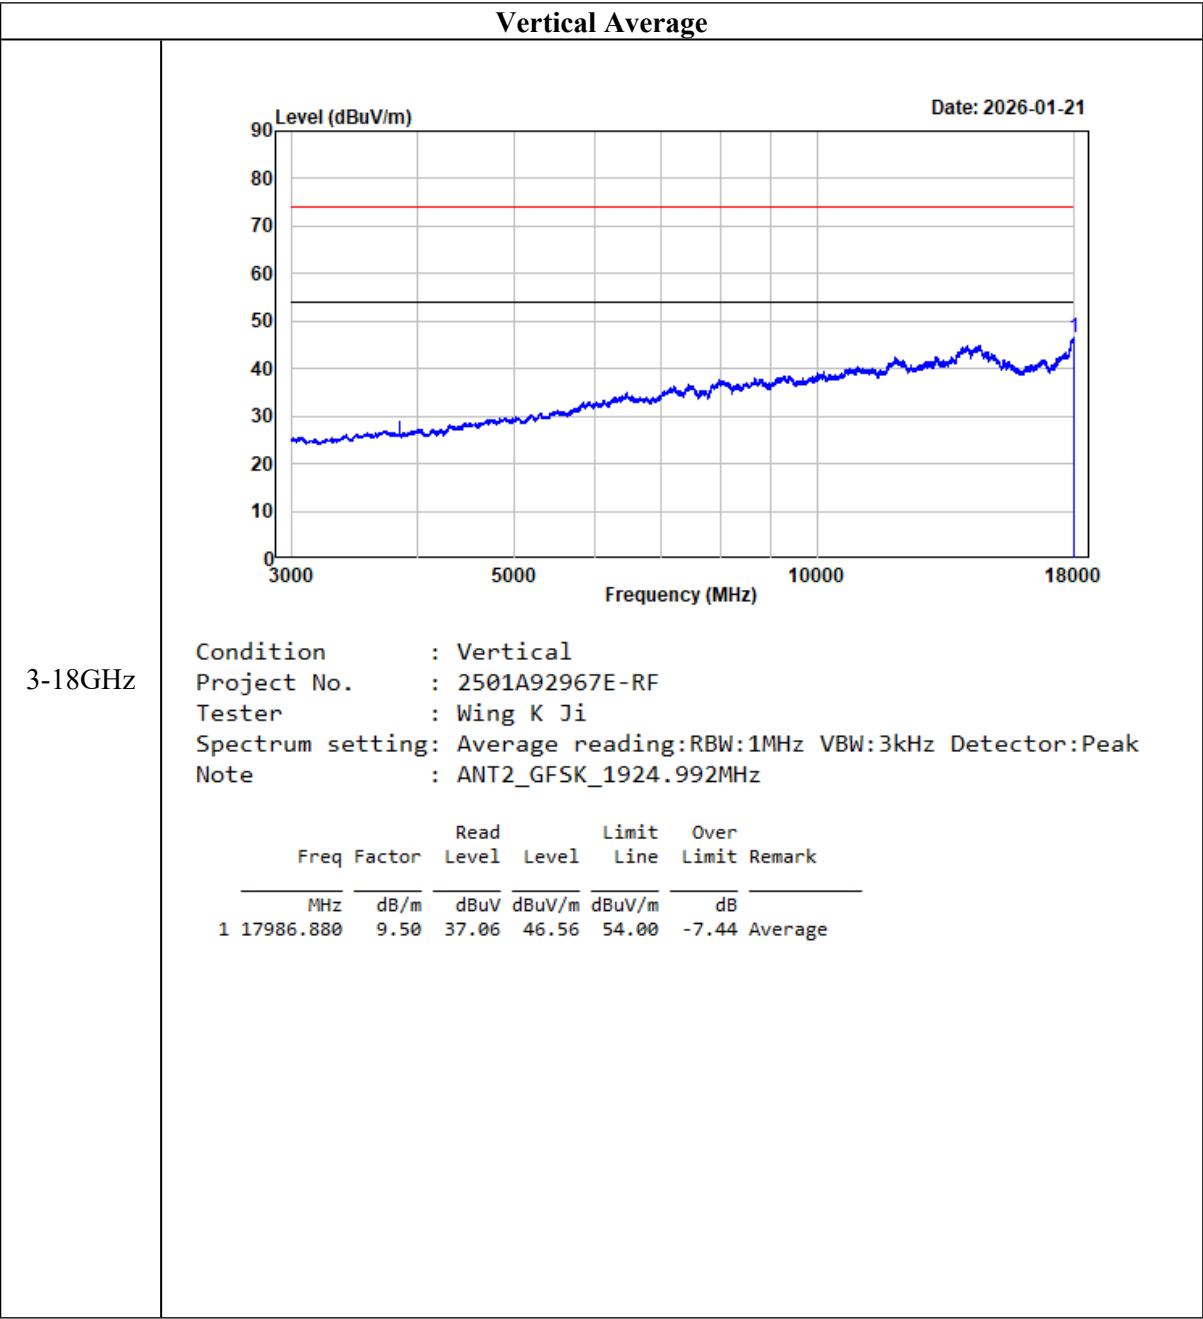

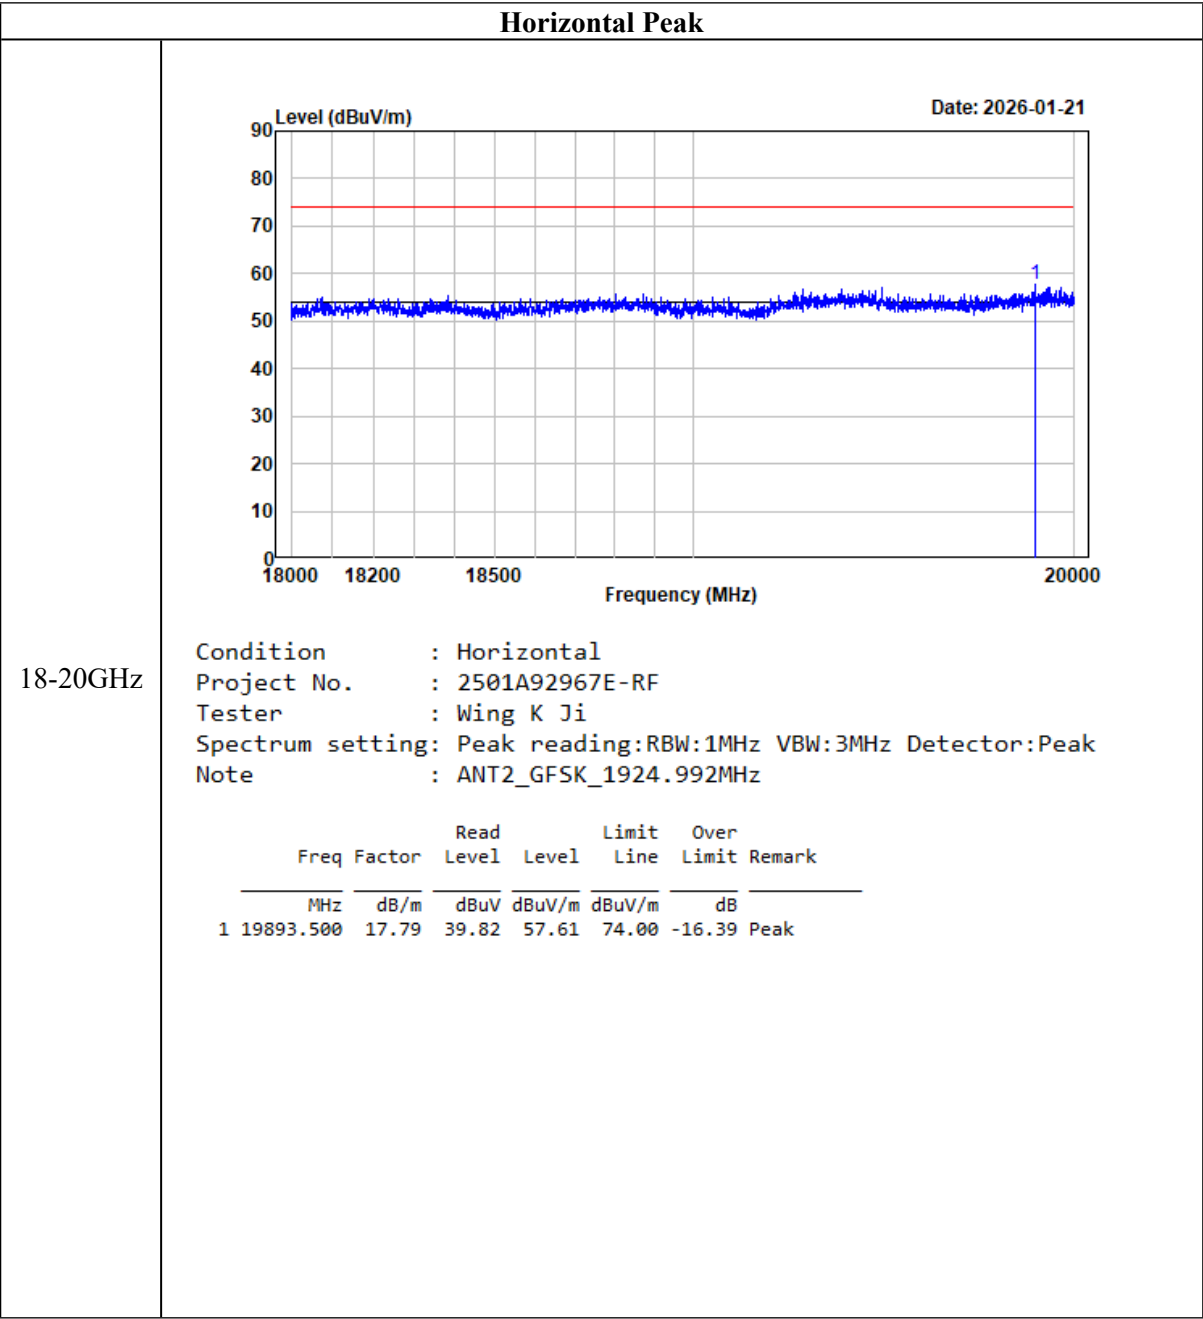


Horizontal Average

18-20GHz

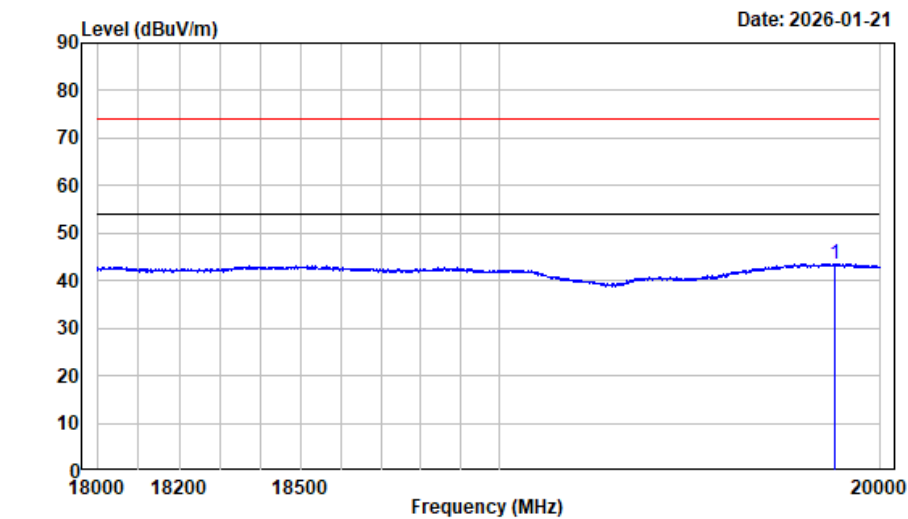


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_GFSK_1924.992MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19878.630	17.78	25.85	43.63	54.00	-10.37	Average

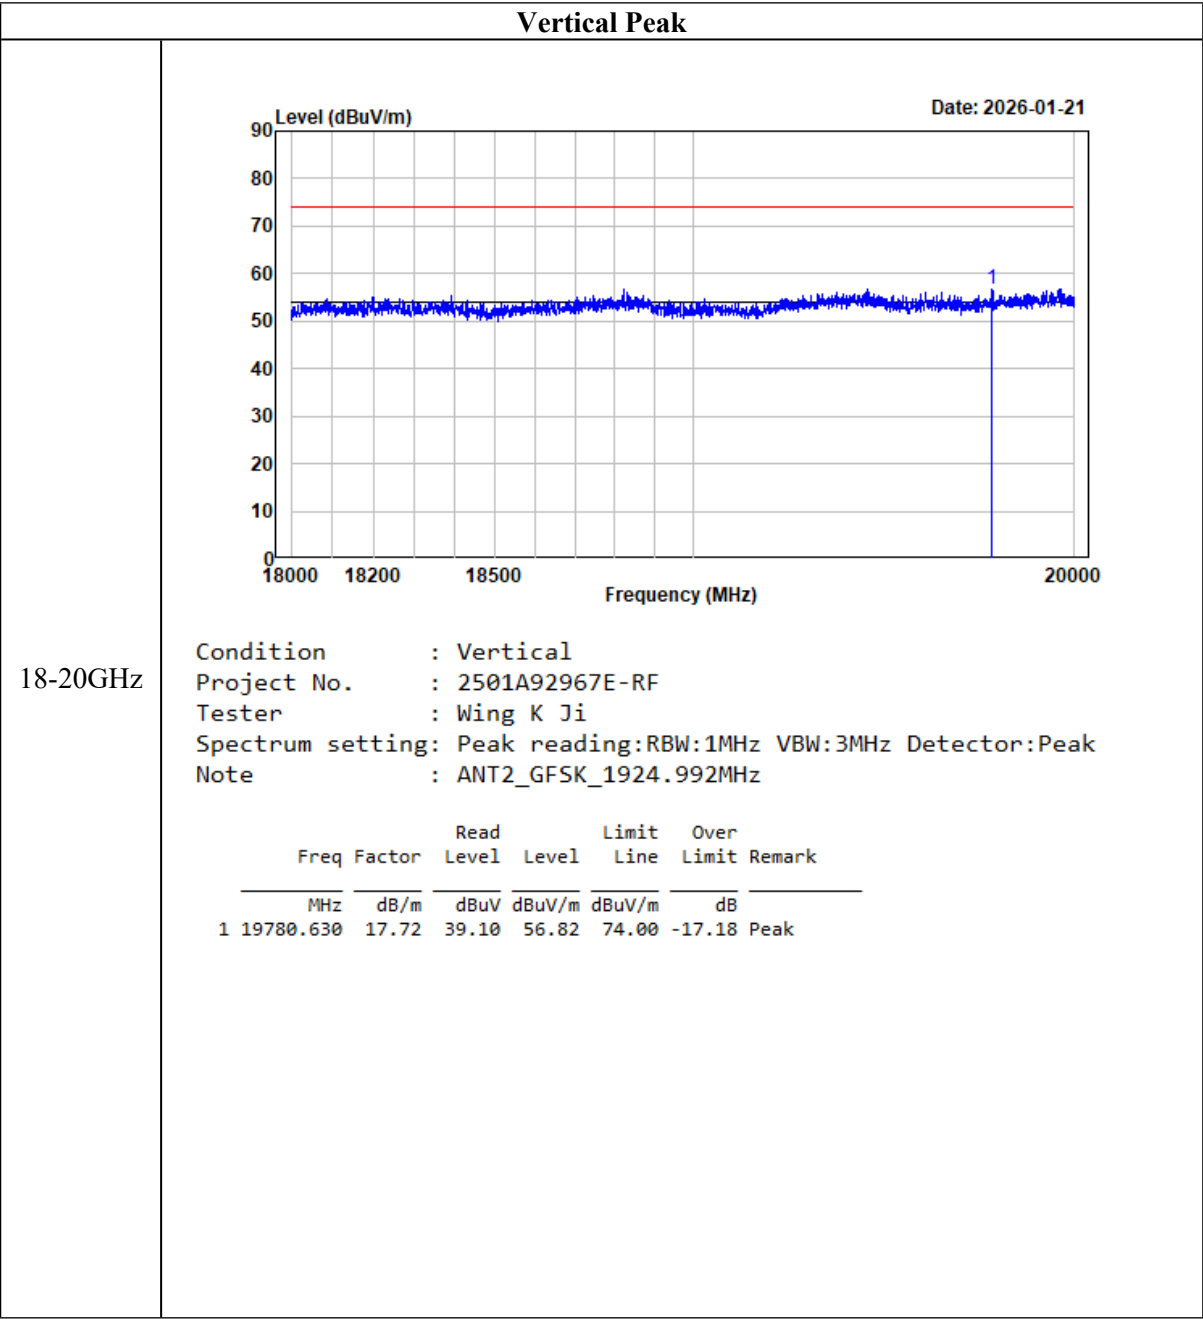

Vertical Average

18-20GHz

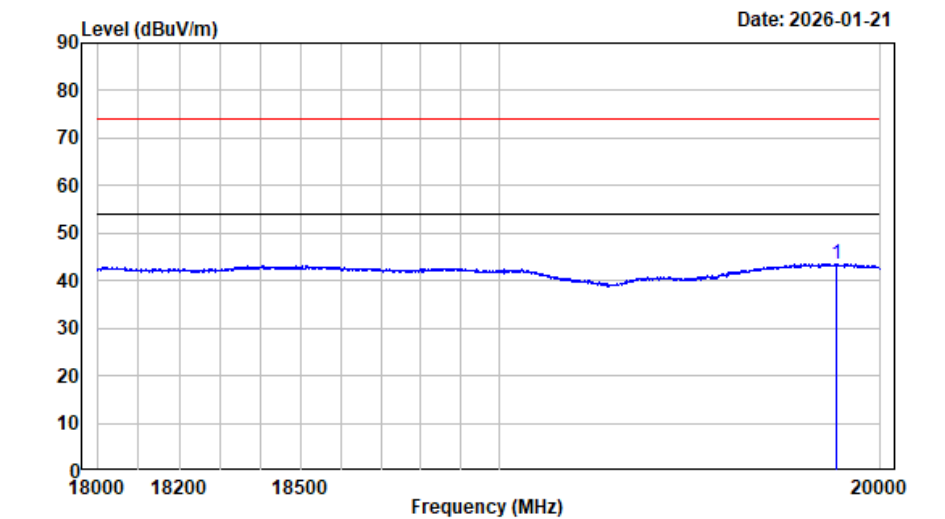

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_GFSK_1924.992MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19881.250	17.78	25.85	43.63	54.00	-10.37	Average

$\pi/2$ -DBPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	124.71	PK	H	-13.22	111.49	/	/
1921.54	111.50	PK	V	-13.22	98.28	/	/
3843.07	52.20	PK	H	-10.00	42.20	74	-31.80
3843.07	51.64	PK	V	-10.00	41.64	74	-32.36
Middle Channel							
1924.99	122.87	PK	H	-13.19	109.68	/	/
1924.99	112.69	PK	V	-13.19	99.50	/	/
3849.98	51.61	PK	H	-10.01	41.60	74	-32.40
3849.98	51.47	PK	V	-10.01	41.46	74	-32.54
High Channel							
1928.45	122.42	PK	H	-13.17	109.25	/	/
1928.45	111.69	PK	V	-13.17	98.52	/	/
3856.90	51.71	PK	H	-9.98	41.73	74	-32.27
3856.90	51.57	PK	V	-9.98	41.59	74	-32.41

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

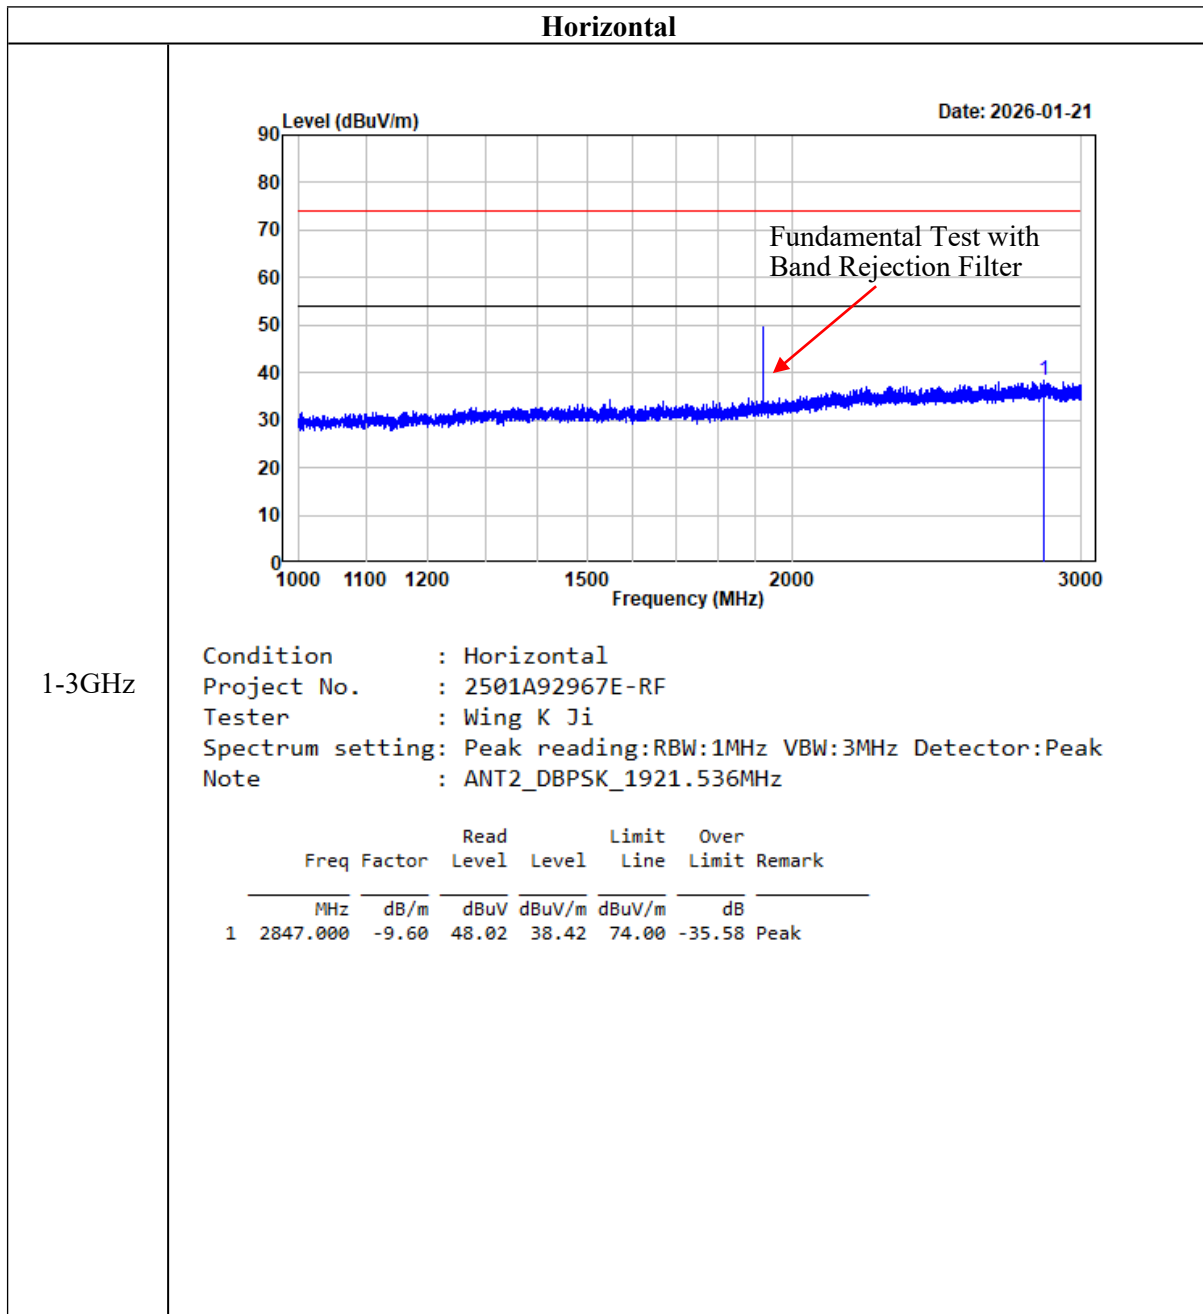

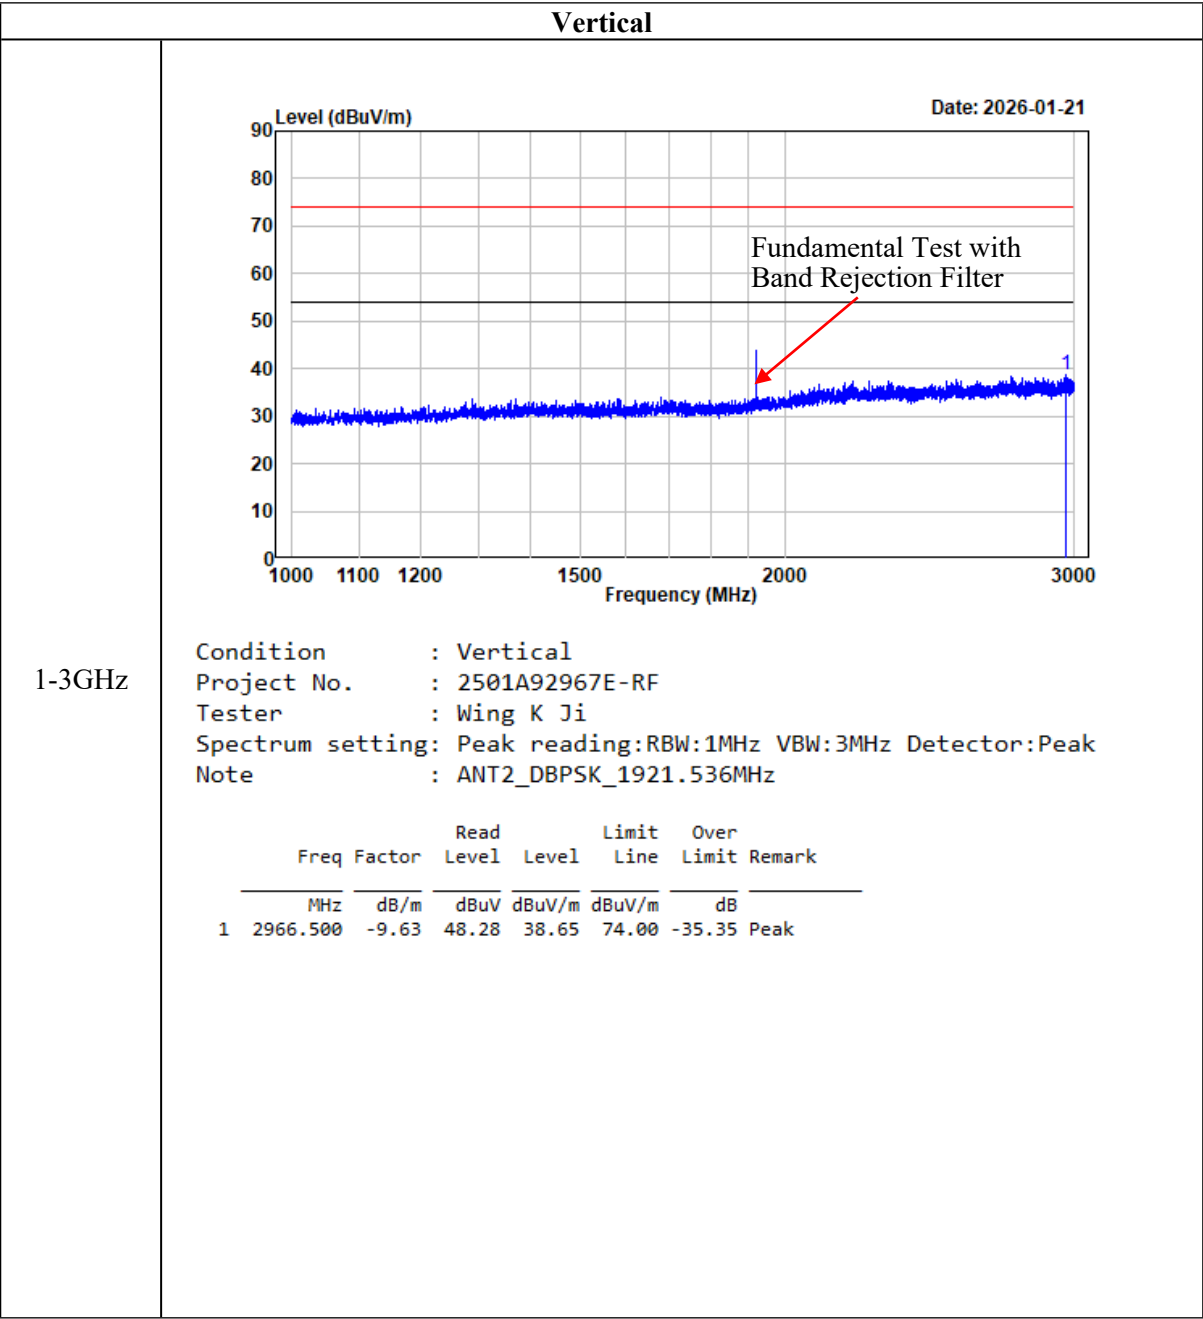


Horizontal Peak


3-18GHz

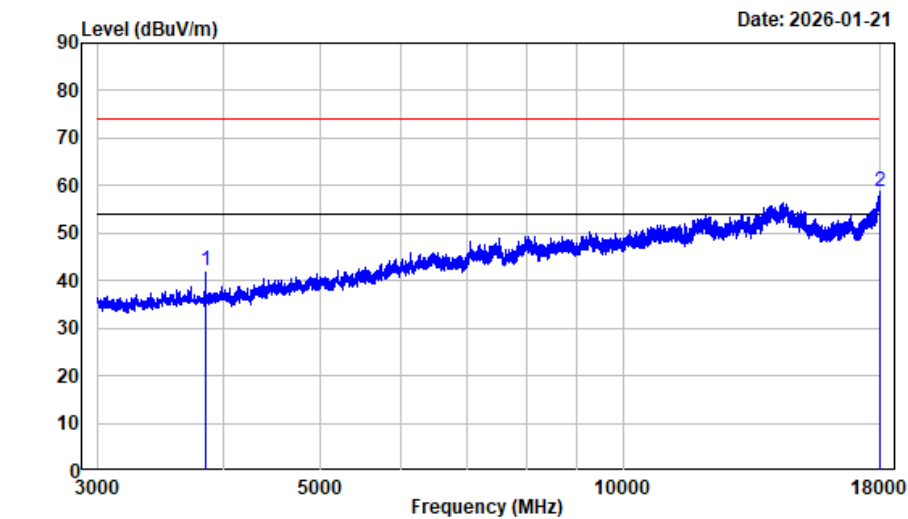



Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT2_DBPSK_1921.536MHz

		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3843.070	-10.00	52.20	42.20	74.00	-31.80	Peak
2 17994.380	9.53	49.25	58.78	74.00	-15.22	Peak

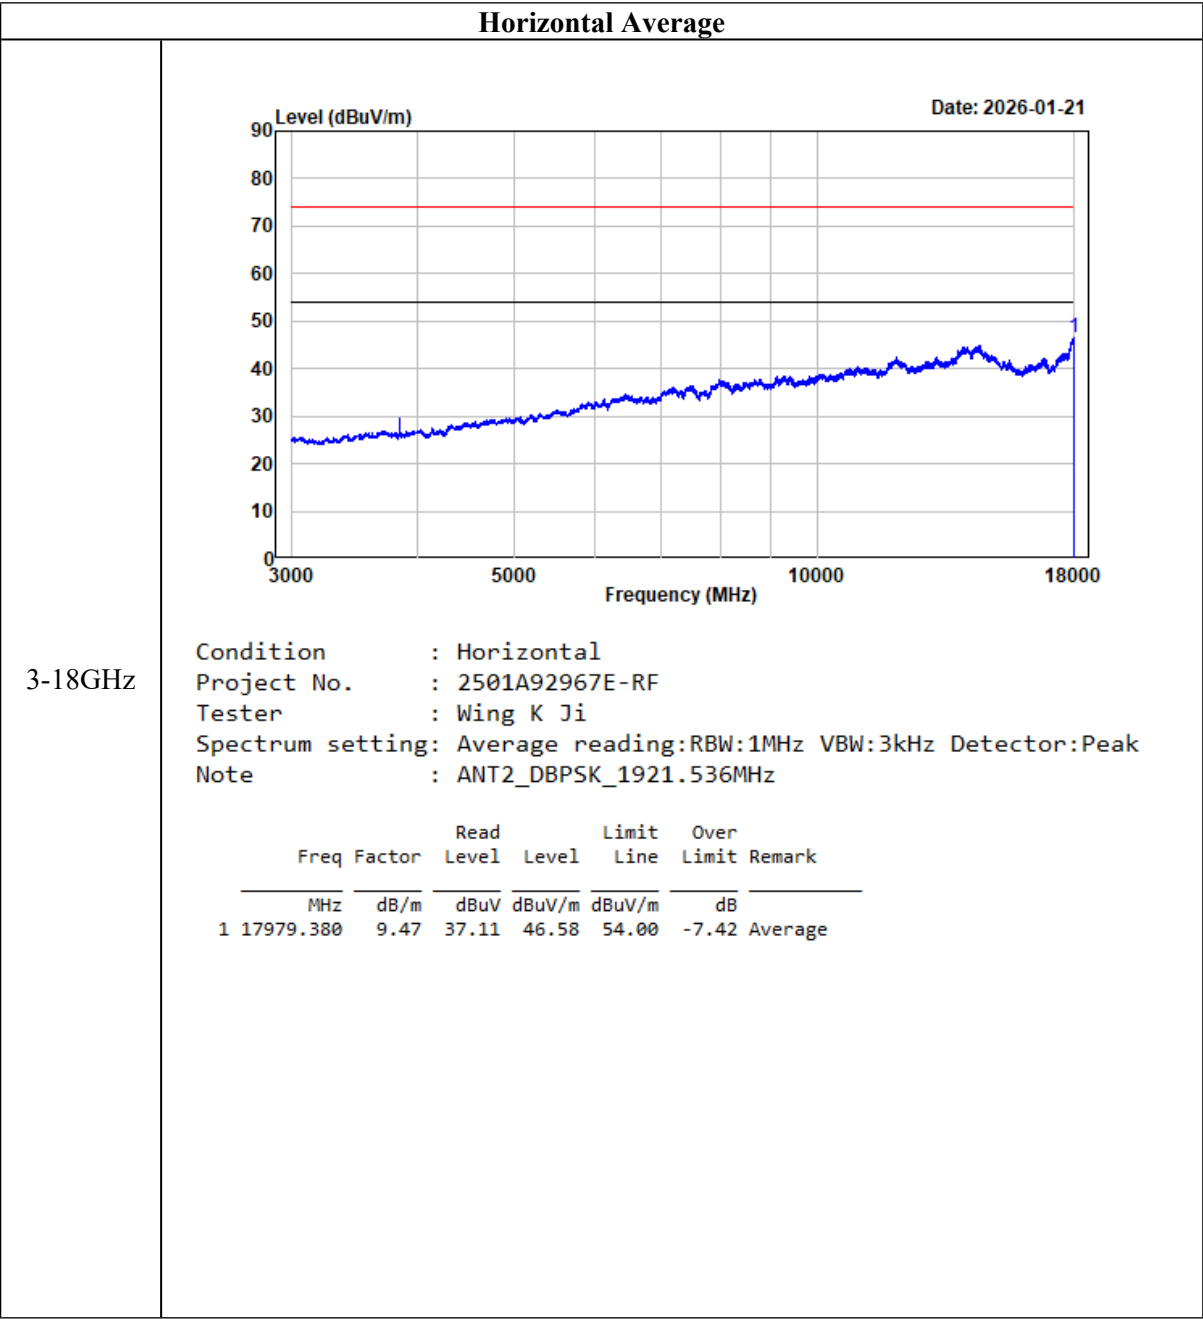

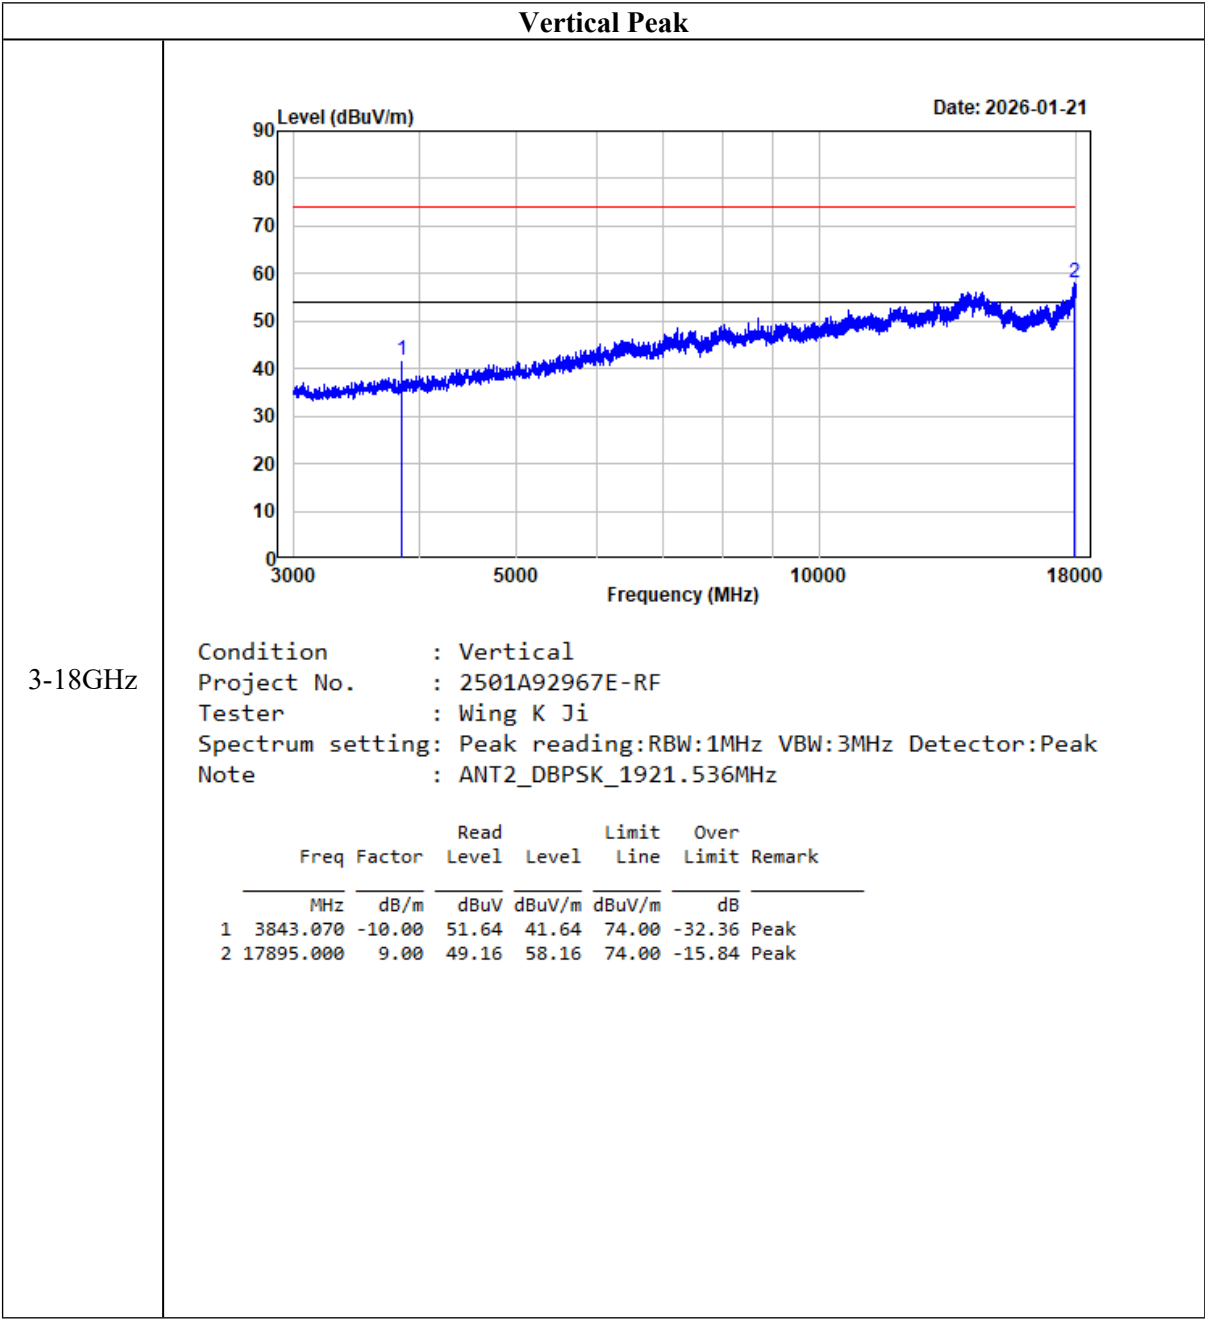


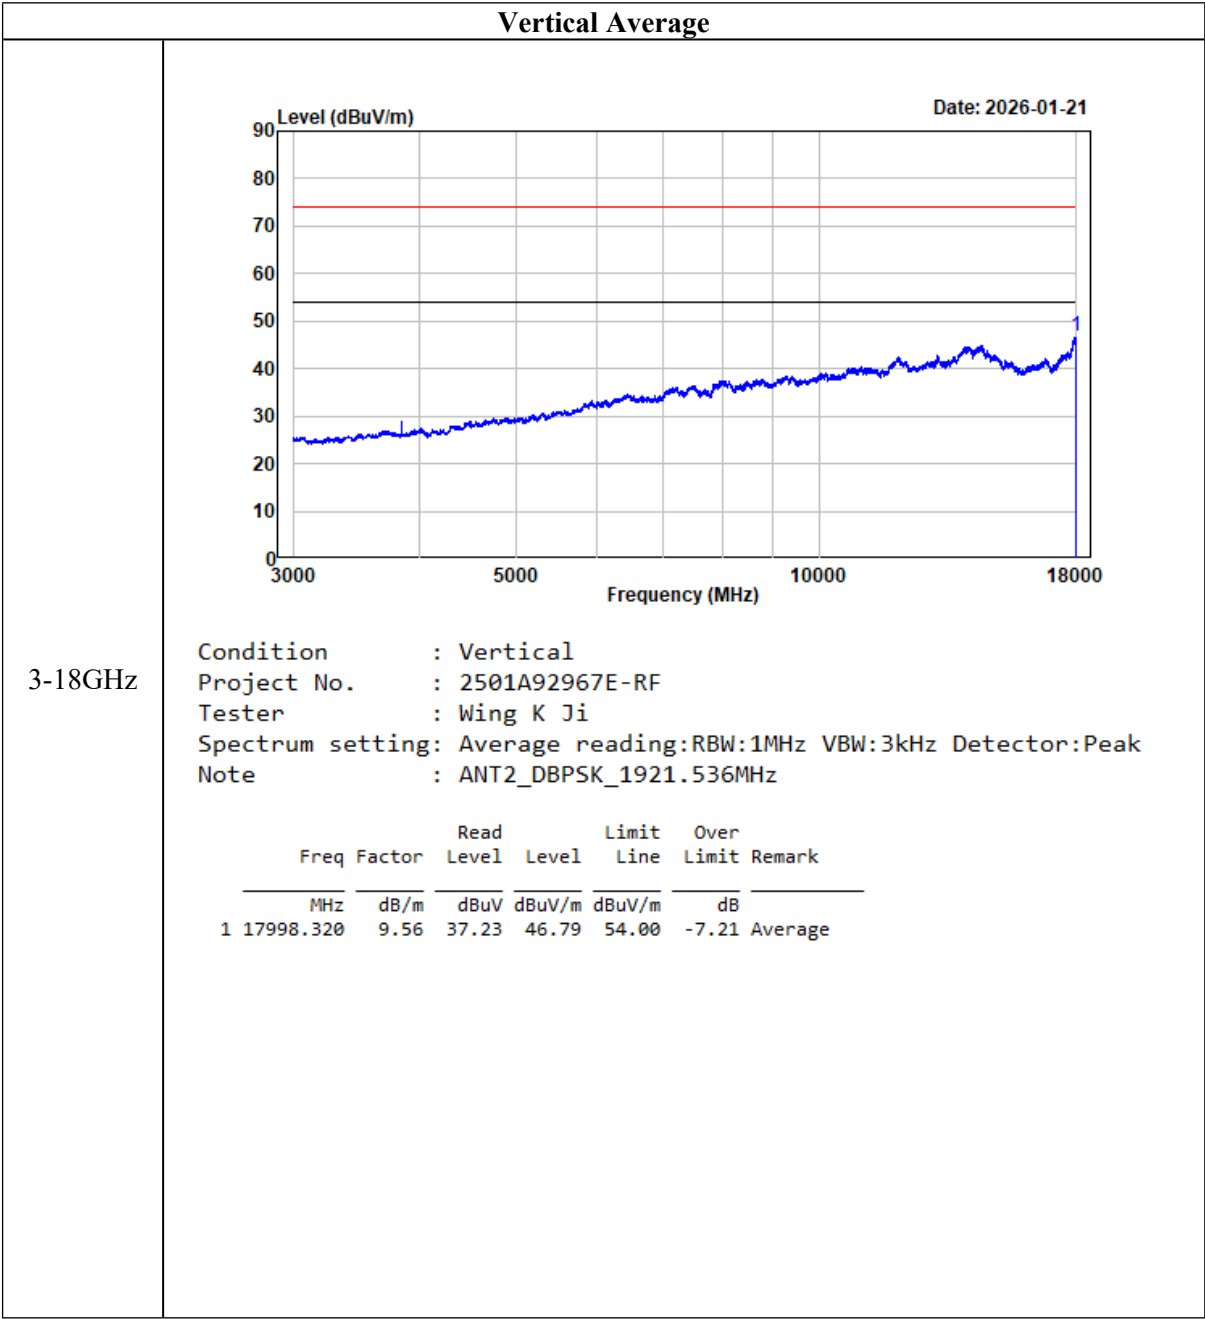

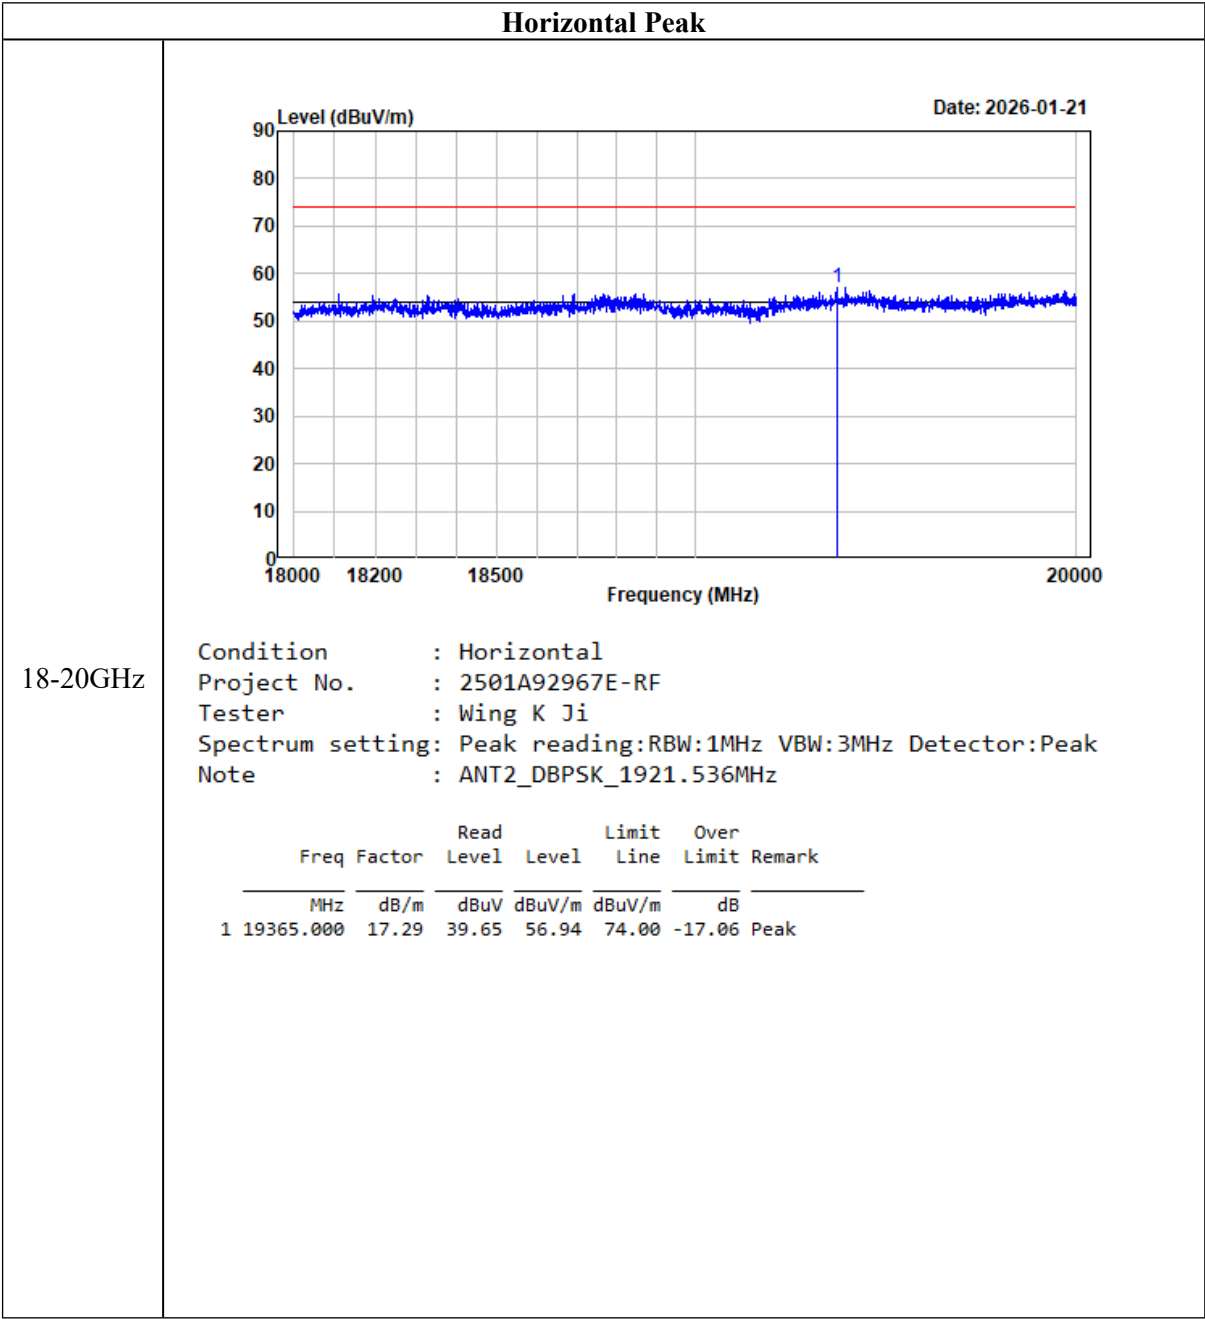


Horizontal Average

18-20GHz

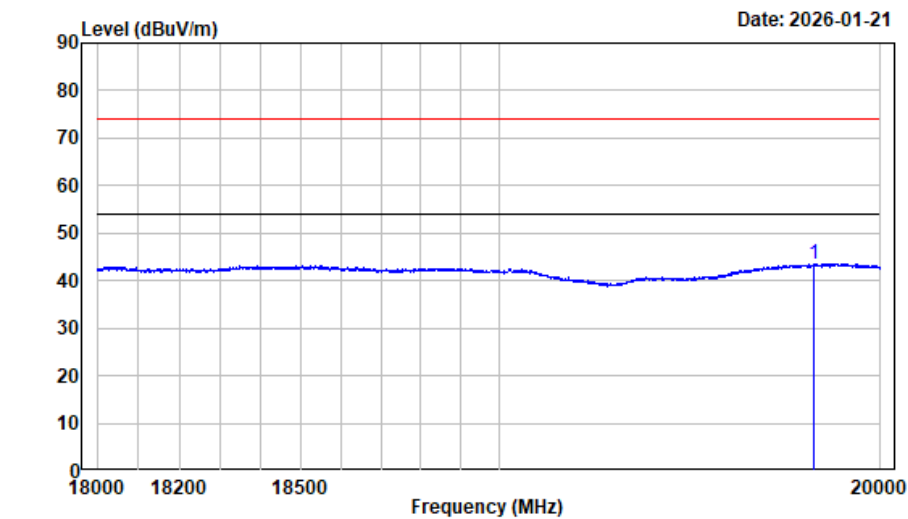


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_DBPSK_1921.536MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19823.500	17.75	25.88	43.63	54.00	-10.37	Average

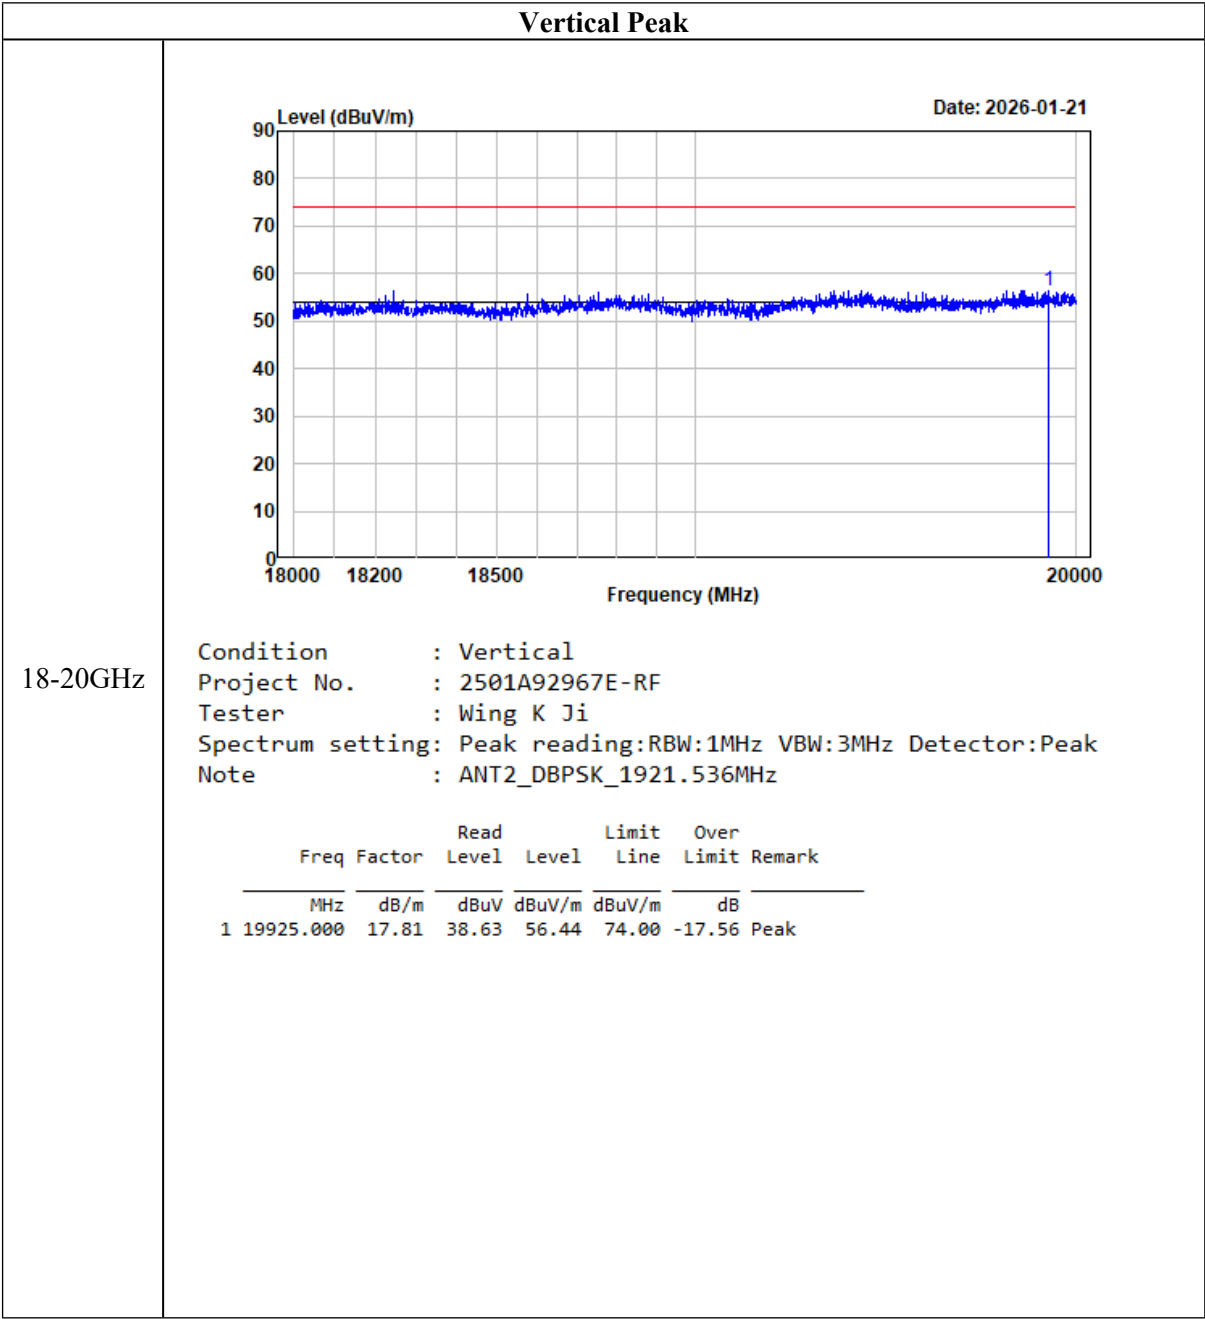

Vertical Average

18-20GHz

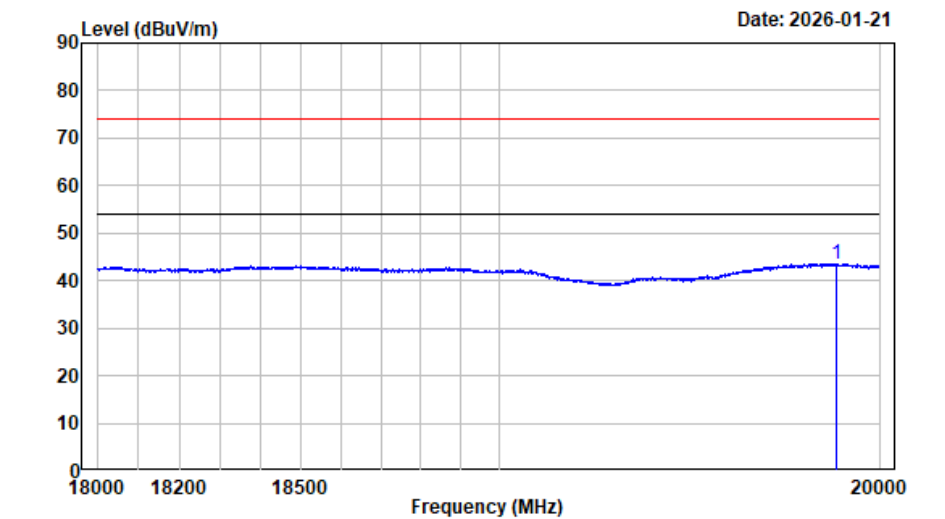

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_DBPSK_1921.536MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19883.880		17.78	25.82	43.60	54.00	-10.40	Average

$\pi/4$ -DQPSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	125.09	PK	H	-13.22	111.87	/	/
1921.54	111.73	PK	V	-13.22	98.51	/	/
3843.07	51.81	PK	H	-10.00	41.81	74	-32.19
3843.07	51.64	PK	V	-10.00	41.64	74	-32.36
Middle Channel							
1924.99	123.08	PK	H	-13.19	109.89	/	/
1924.99	112.50	PK	V	-13.19	99.31	/	/
3849.98	51.70	PK	H	-10.01	41.69	74	-32.31
3849.98	51.52	PK	V	-10.01	41.51	74	-32.49
High Channel							
1928.45	122.60	PK	H	-13.17	109.43	/	/
1928.45	111.02	PK	V	-13.17	97.85	/	/
3856.90	51.95	PK	H	-9.98	41.97	74	-32.03
3856.90	51.75	PK	V	-9.98	41.77	74	-32.23

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.


Listed with the worst case test plot:

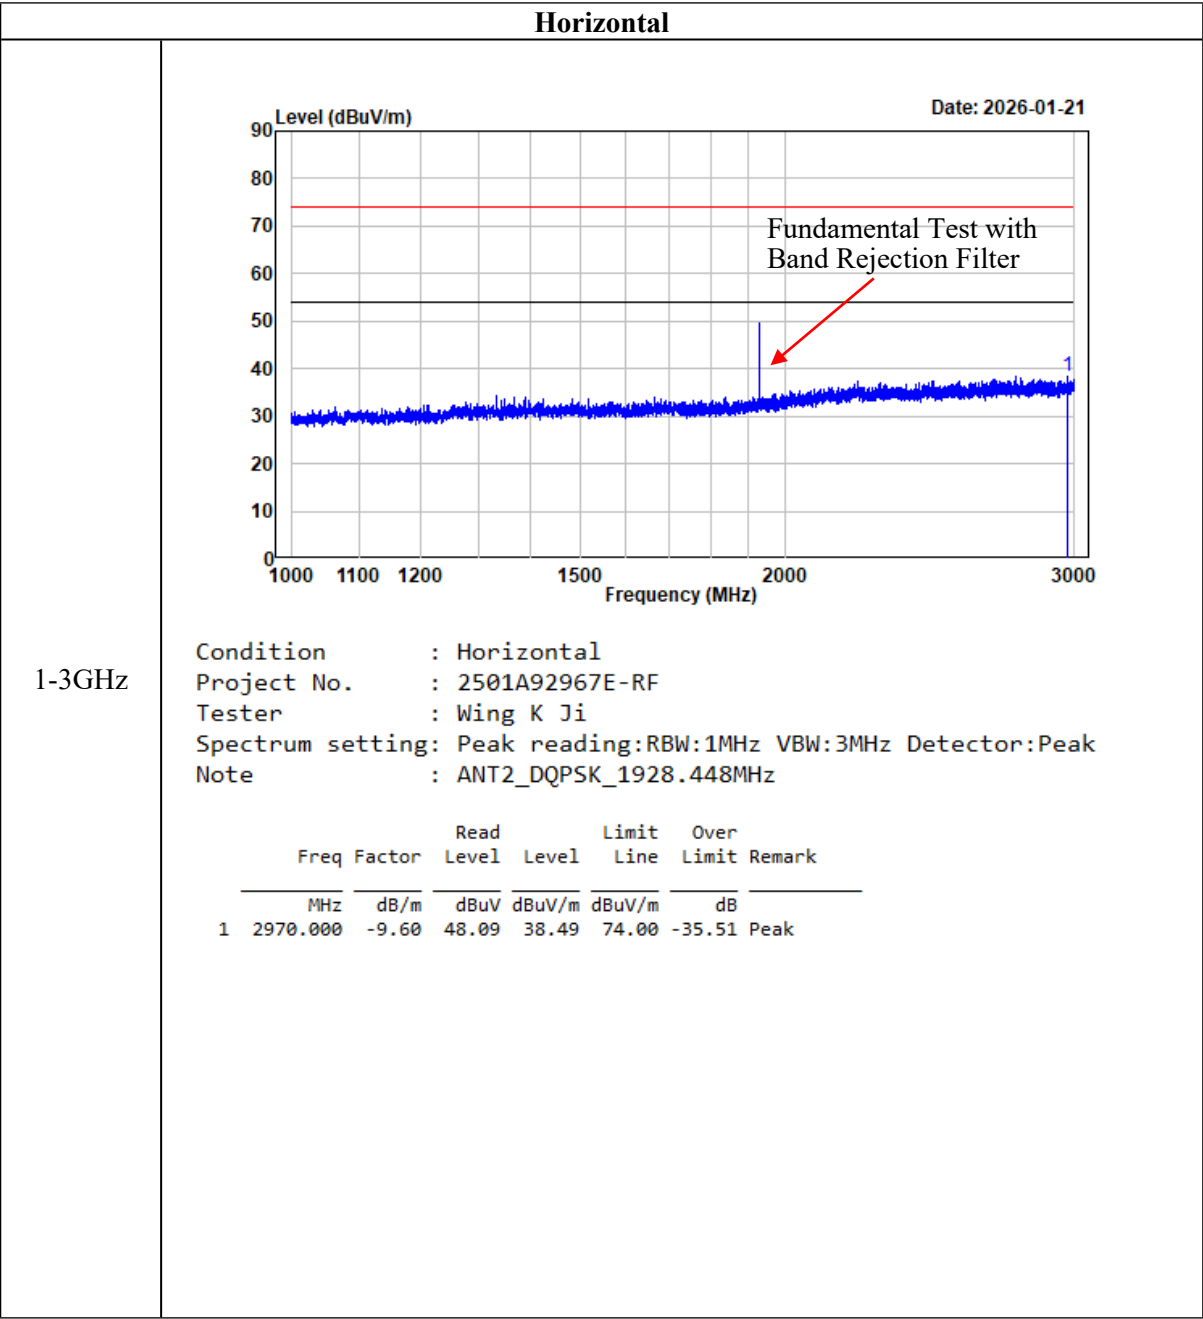

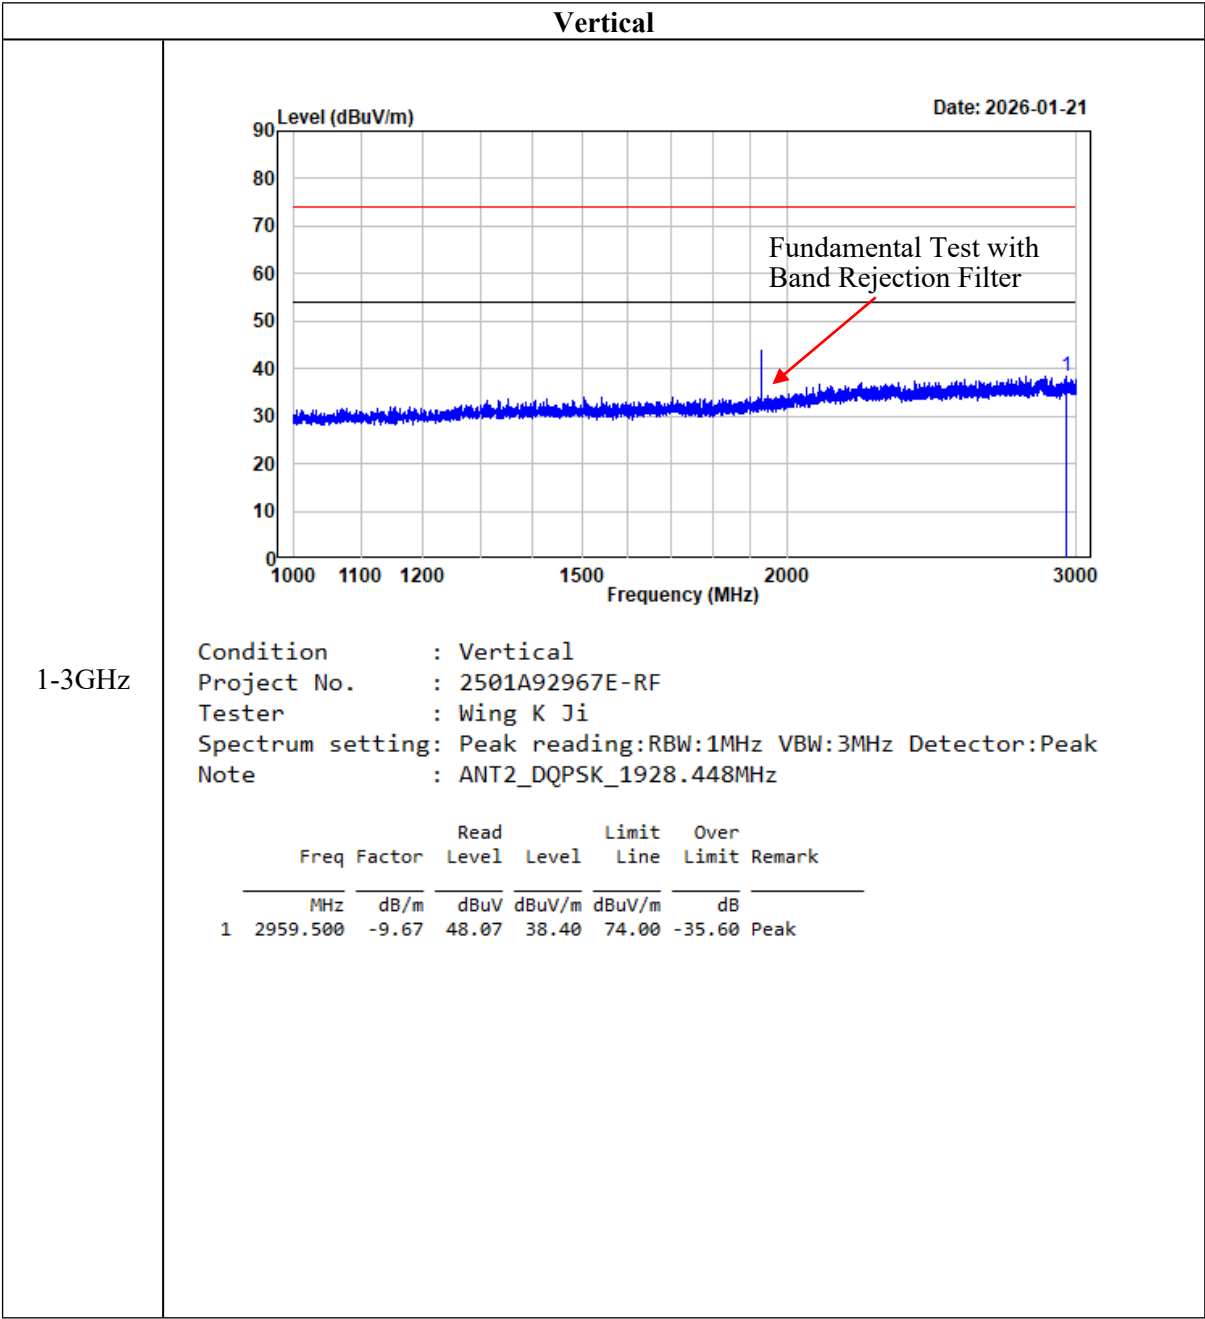

Horizontal Peak

3-18GHz

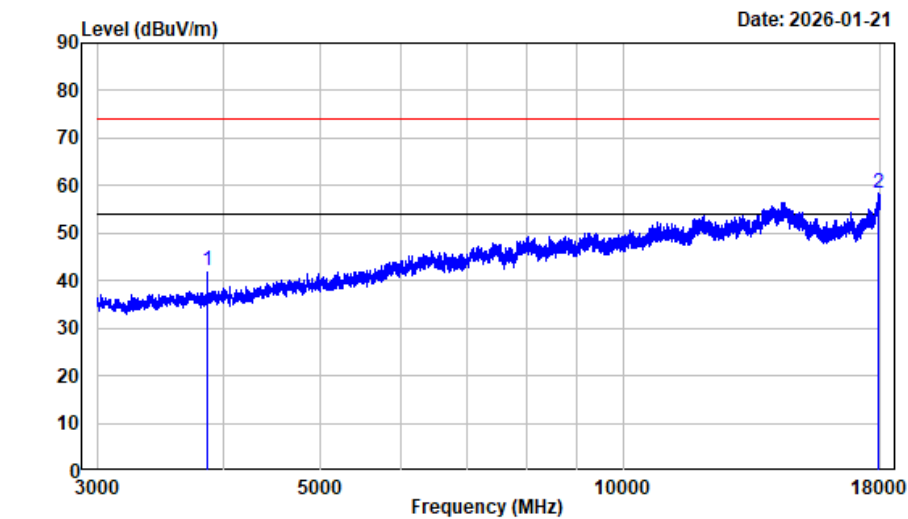


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT2_DQPSK_1928.448MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3856.900	-9.98	51.95	41.97	74.00	-32.03	Peak
2 17917.500	9.18	49.20	58.38	74.00	-15.62	Peak

Horizontal Average

3-18GHz

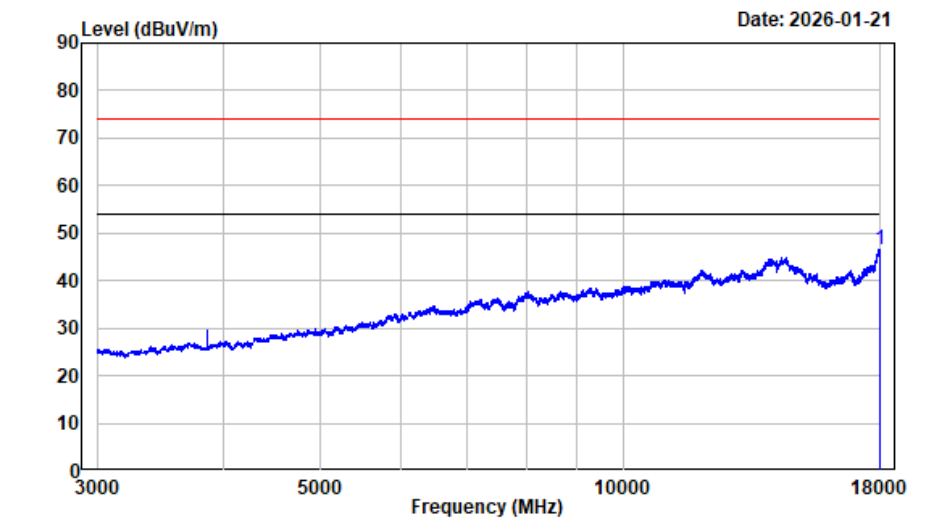


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_DQPSK_1928.448MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17985.000		9.49	37.06	46.55	54.00	-7.45	Average


Vertical Peak


3-18GHz

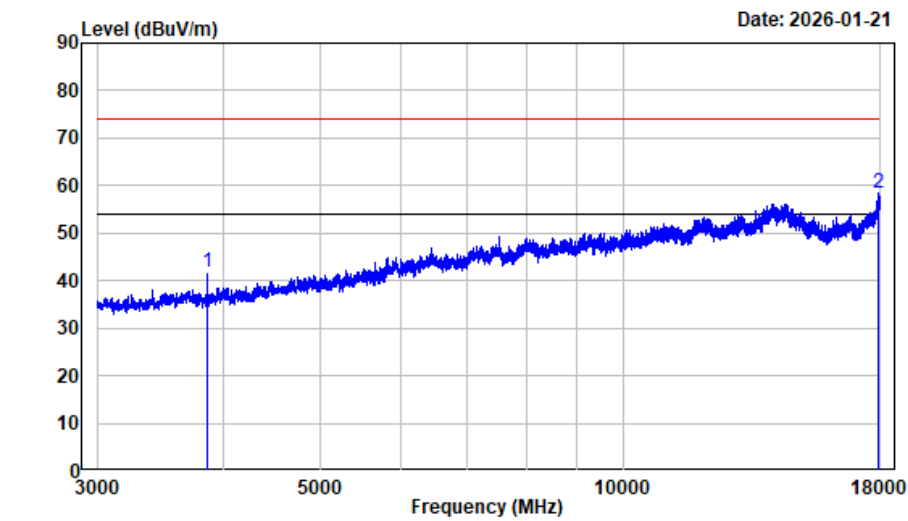

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : ANT2_DQPSK_1928.448MHz


		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3856.900	-9.98	51.75	41.77	74.00	-32.23	Peak
2 17928.750	9.23	49.15	58.38	74.00	-15.62	Peak

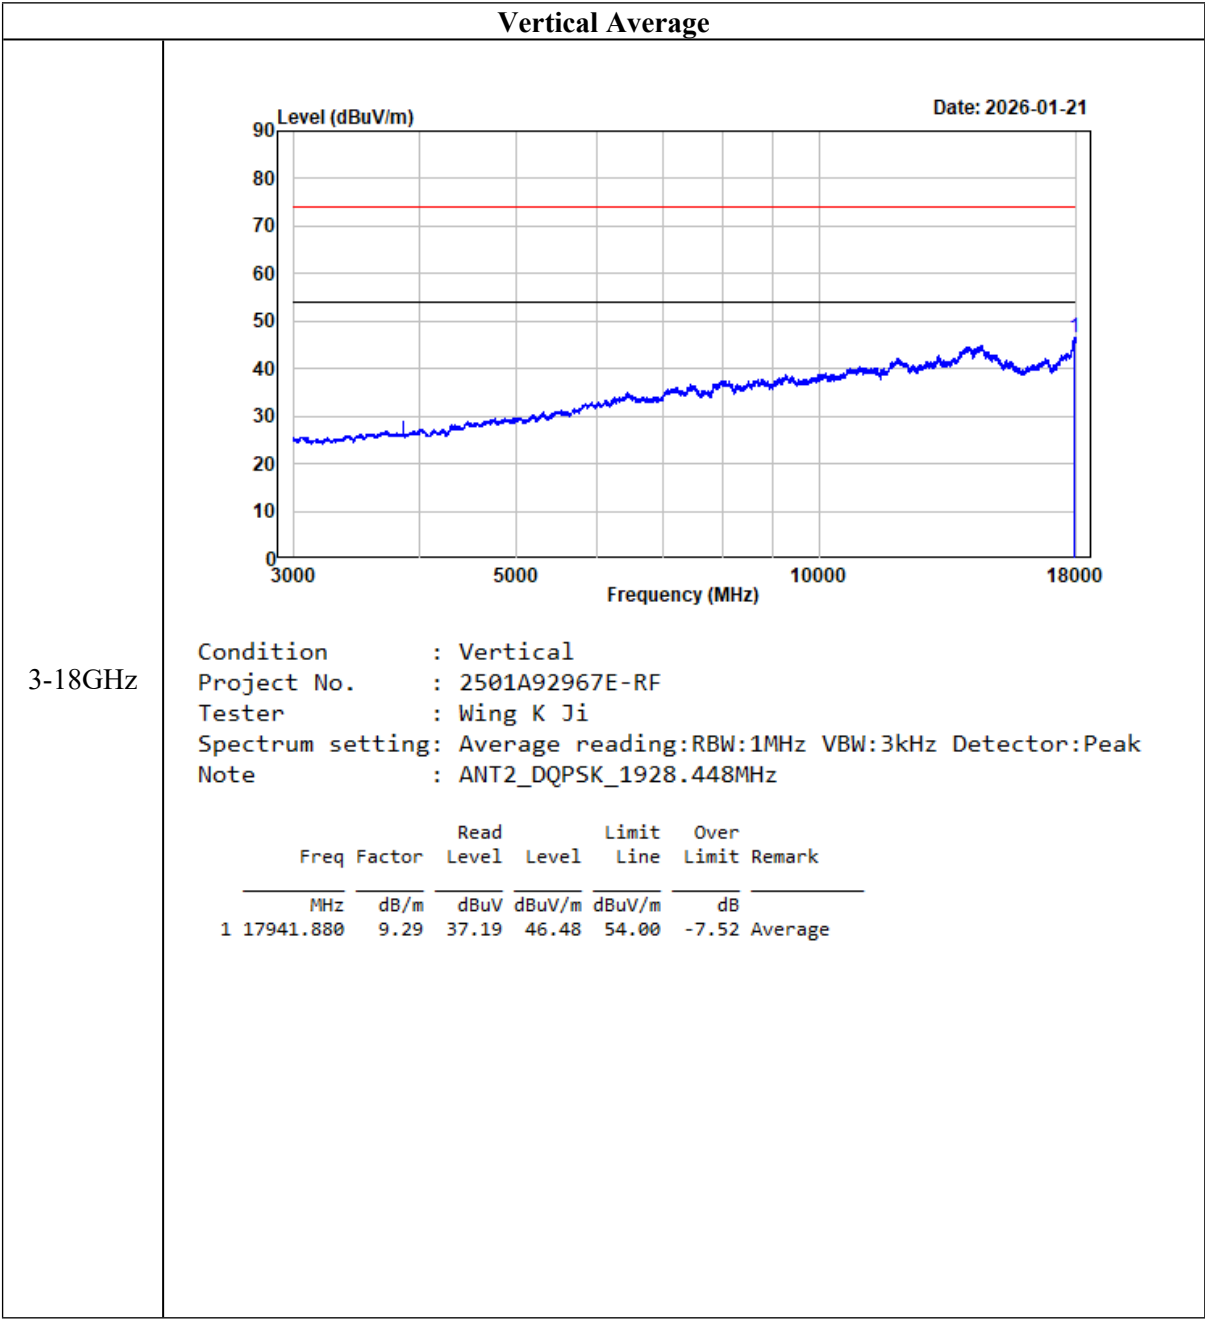

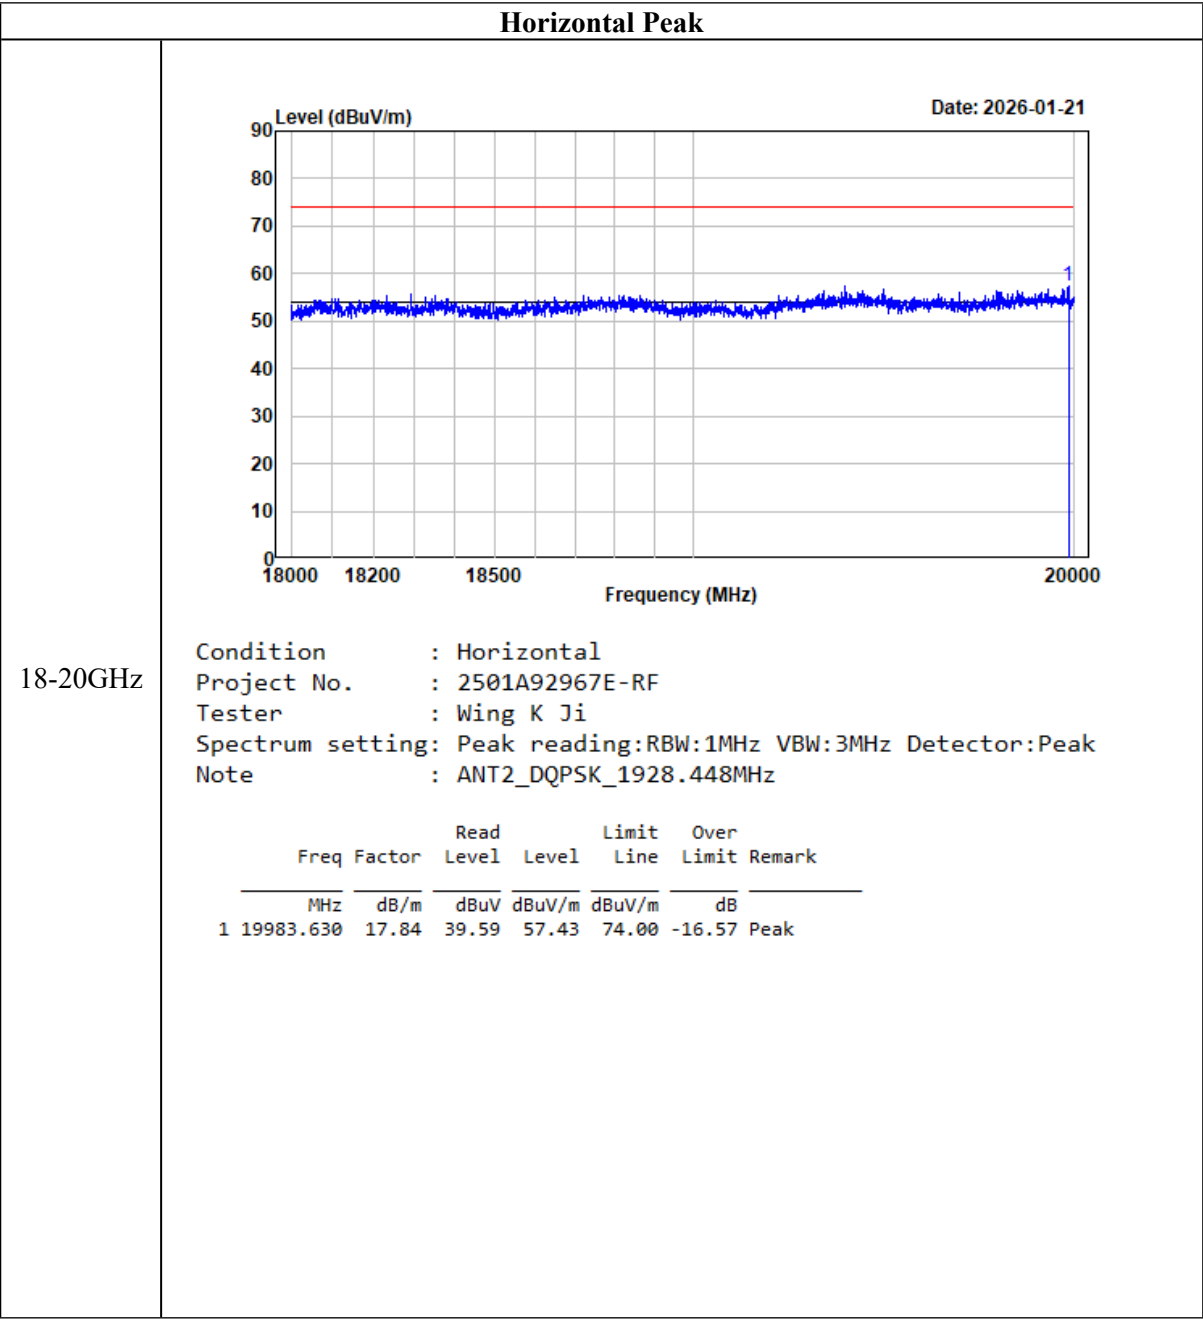


Horizontal Average

18-20GHz

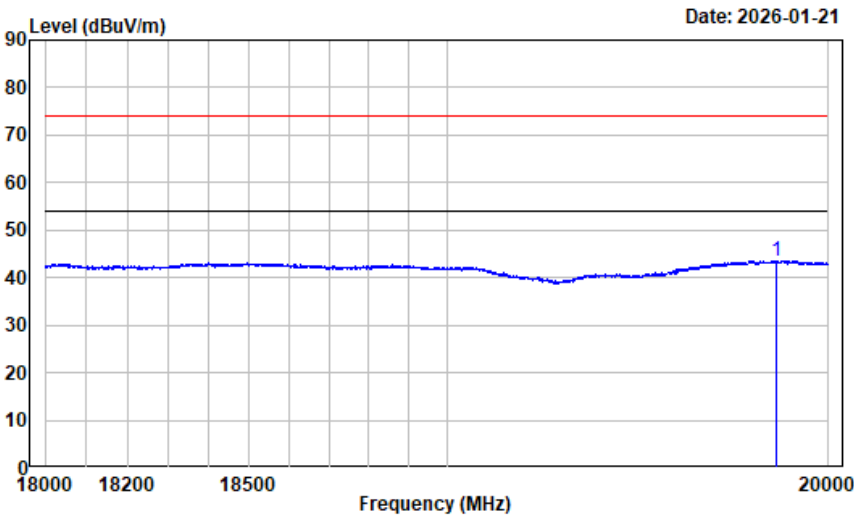


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_DQPSK_1928.448MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19858.500		17.77	25.80	43.57	54.00	-10.43	Average

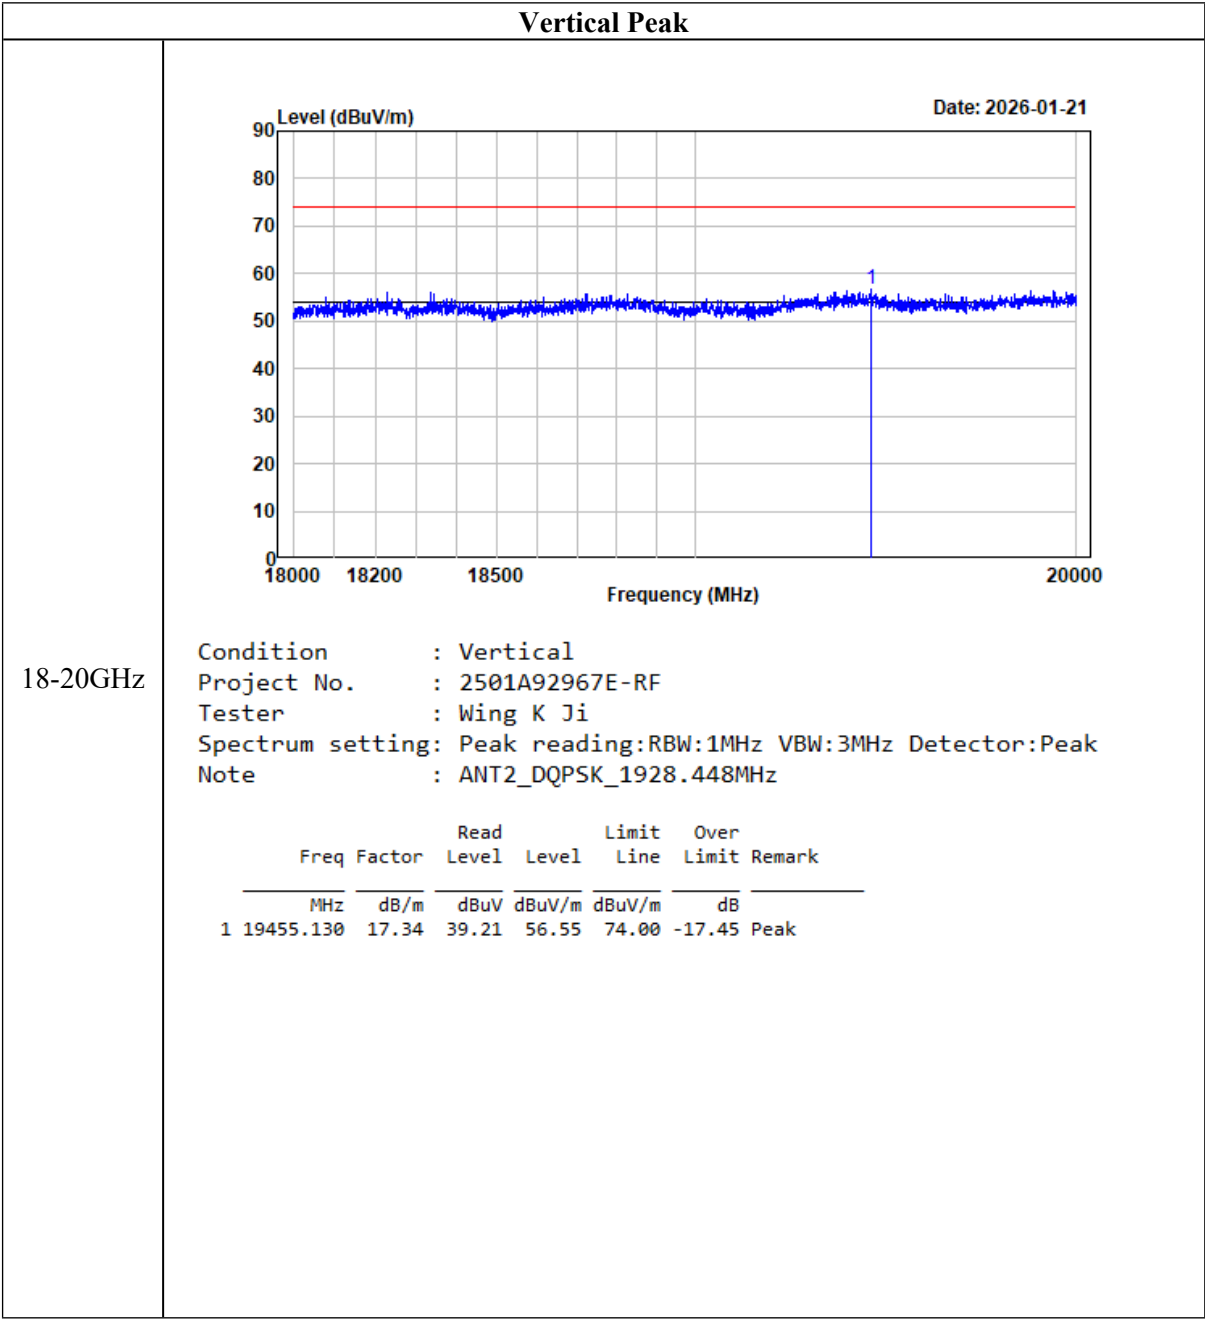

Vertical Average

18-20GHz

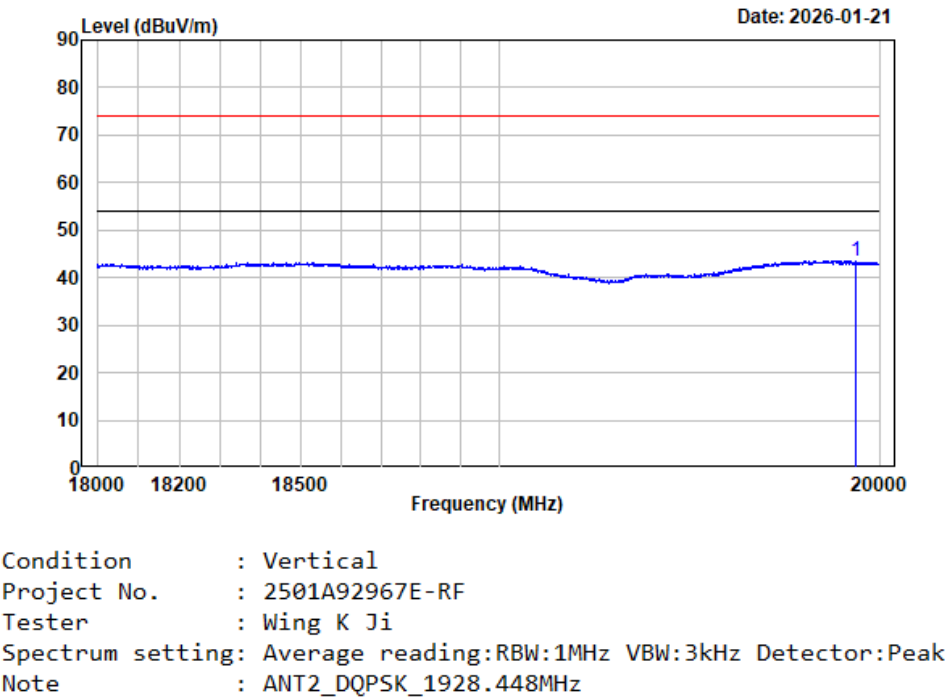

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19932.000	17.81	25.80	43.61	54.00	-10.39	Average

$\pi/8$ -D8PSK:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel							
1921.54	123.44	PK	H	-13.22	110.22	/	/
1921.54	111.43	PK	V	-13.22	98.21	/	/
3843.07	51.85	PK	H	-10.00	41.85	74	-32.15
3843.07	51.74	PK	V	-10.00	41.74	74	-32.26
Middle Channel							
1924.99	122.76	PK	H	-13.19	109.57	/	/
1924.99	112.94	PK	V	-13.19	99.75	/	/
3849.98	51.87	PK	H	-10.01	41.86	74	-32.14
3849.98	51.77	PK	V	-10.01	41.76	74	-32.24
High Channel							
1928.45	122.42	PK	H	-13.17	109.25	/	/
1928.45	111.01	PK	V	-13.17	97.84	/	/
3856.90	51.57	PK	H	-9.98	41.59	74	-32.41
3856.90	51.41	PK	V	-9.98	41.43	74	-32.57

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

Listed with the worst case test plot:

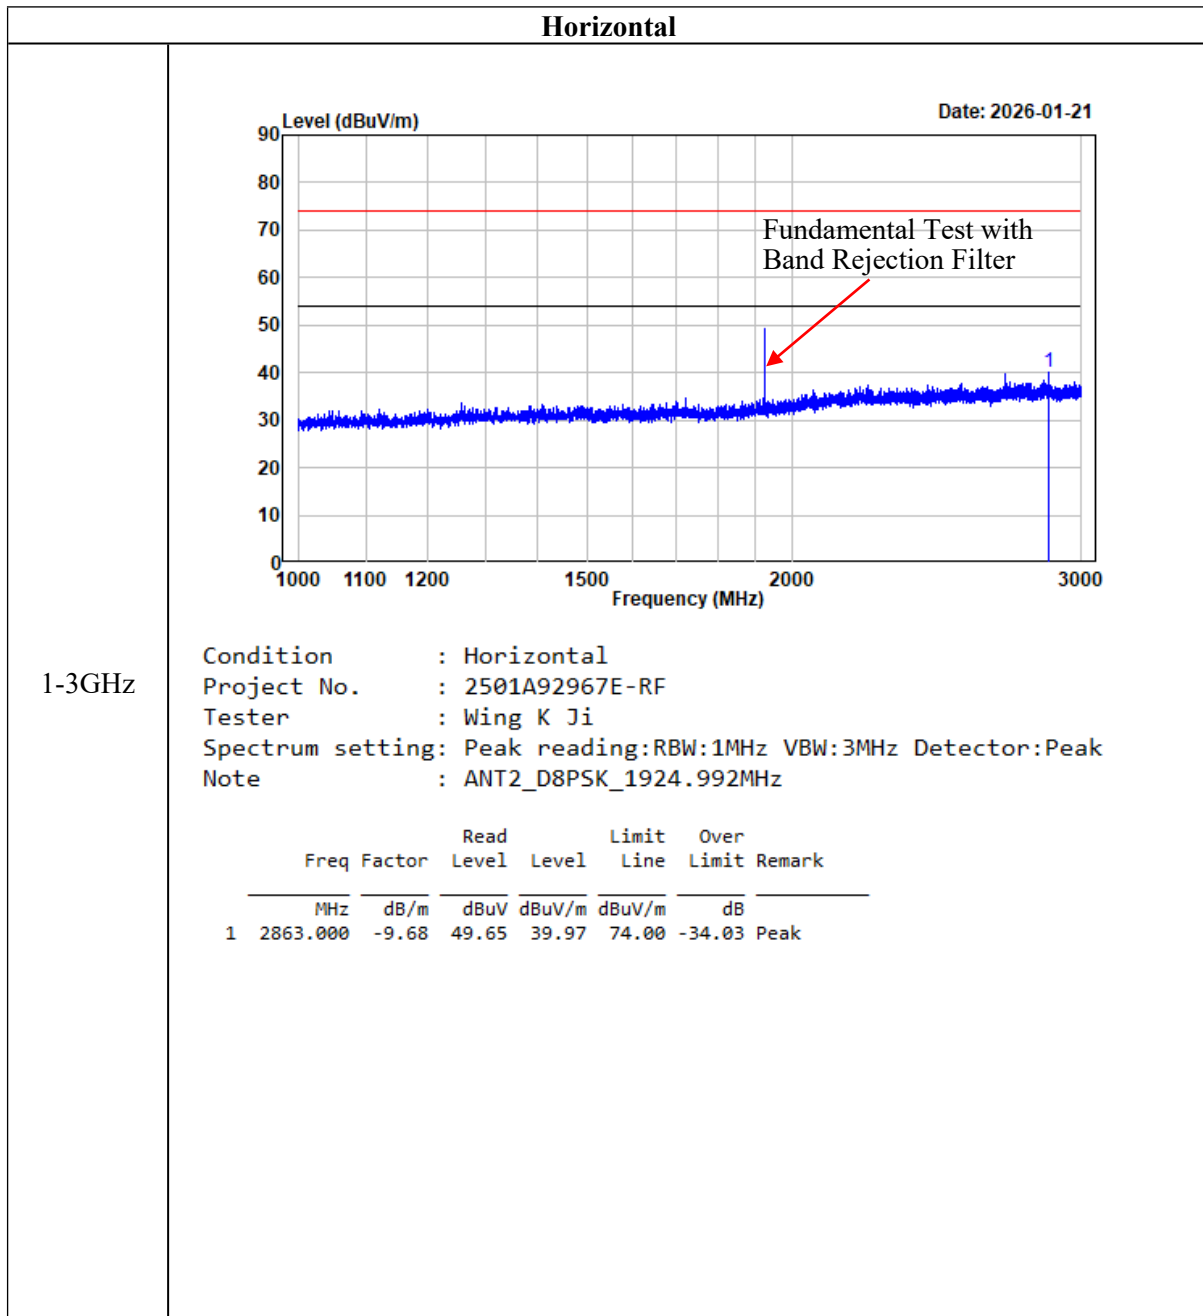

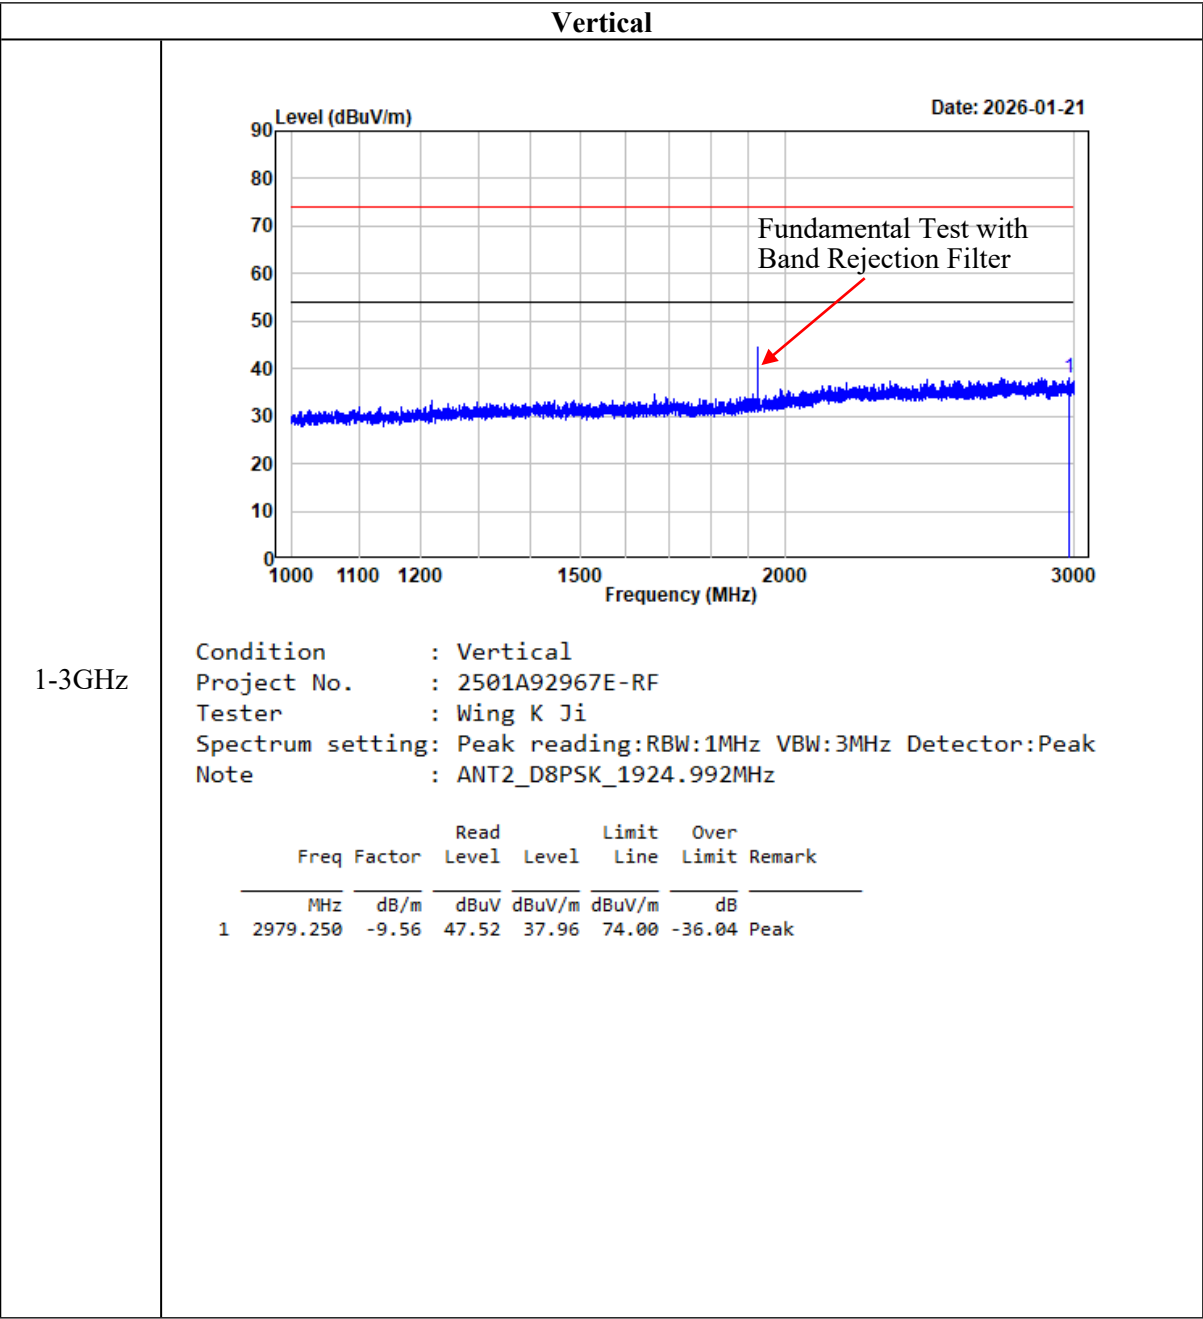


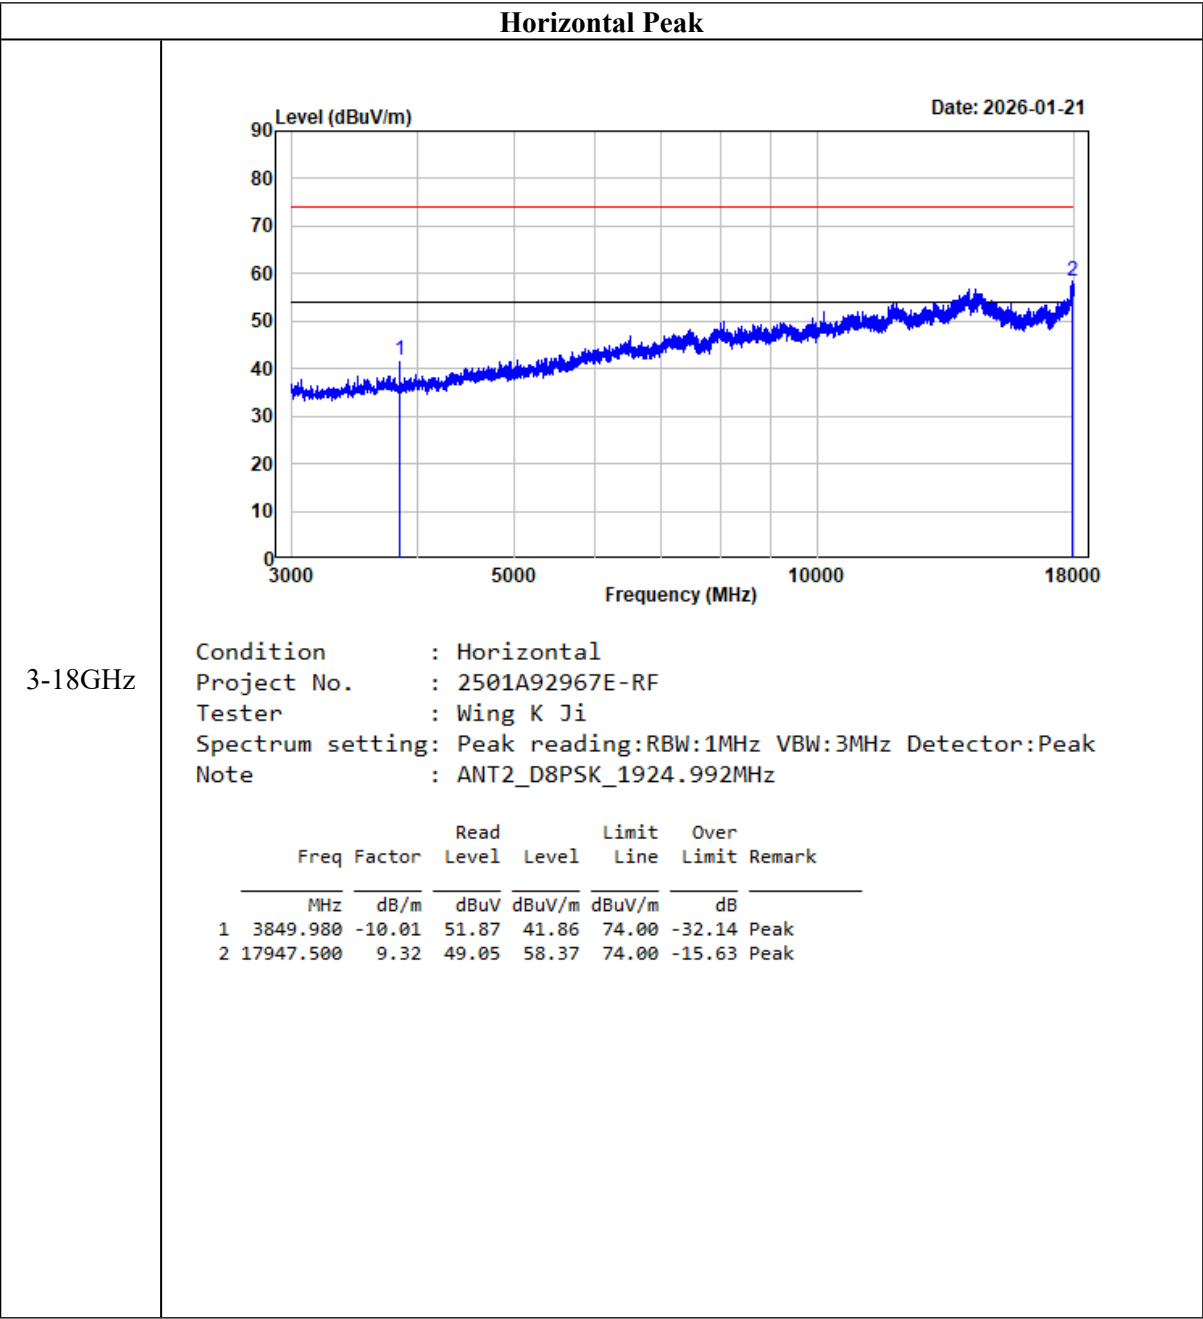

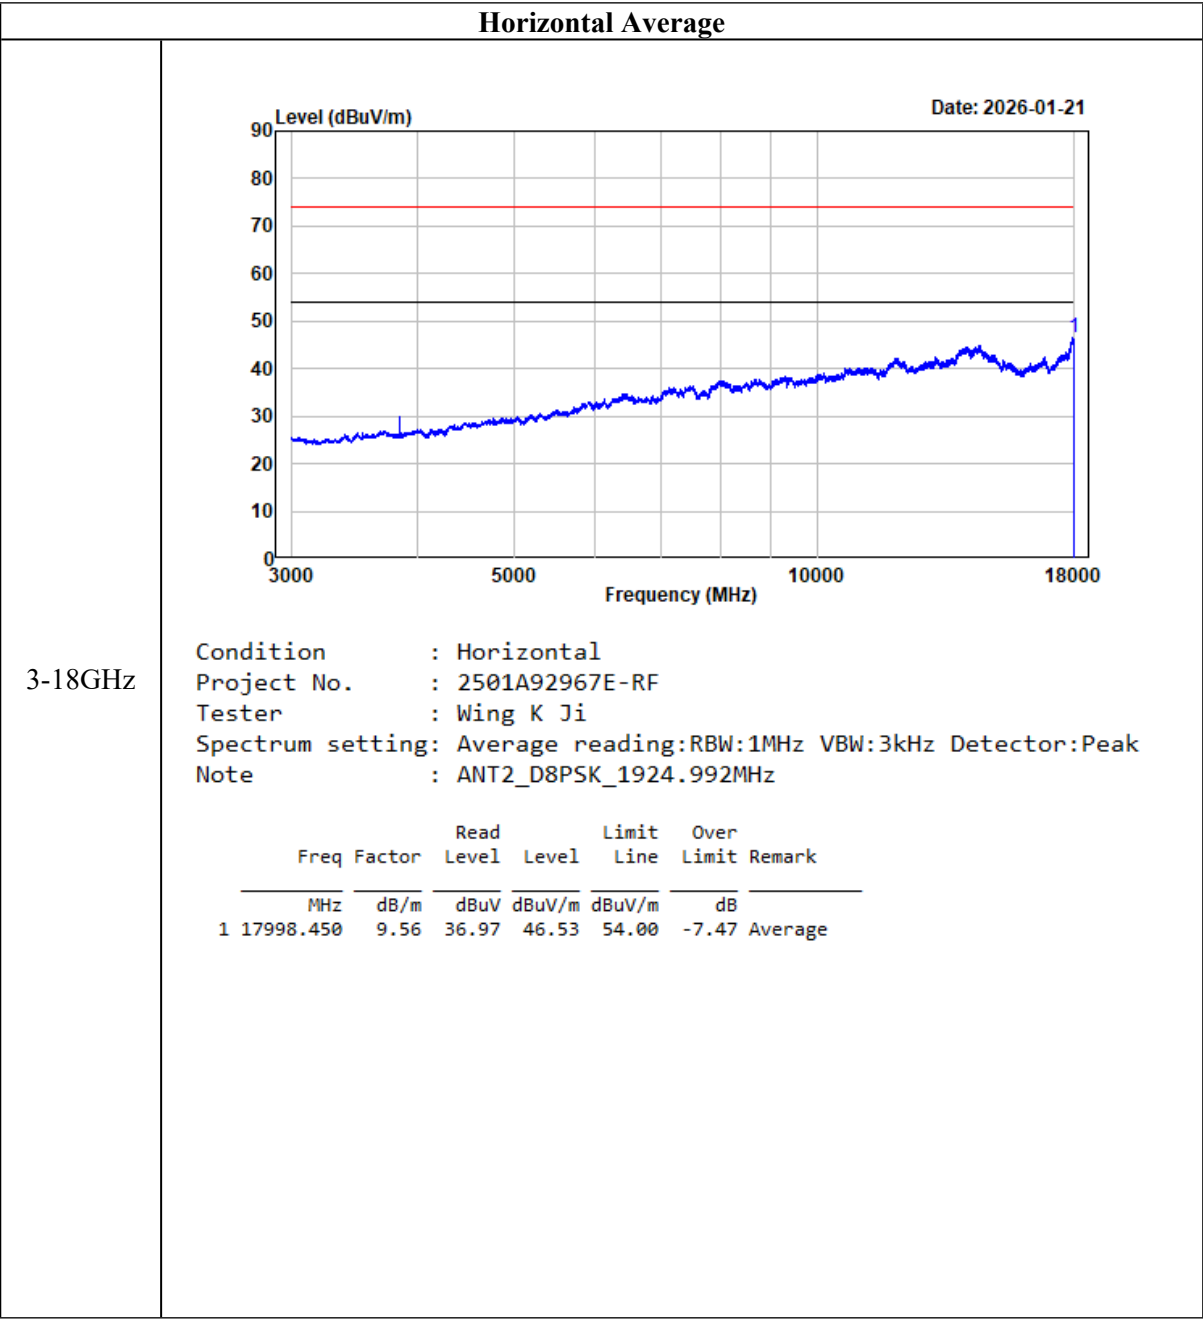


Vertical Peak


3-18GHz

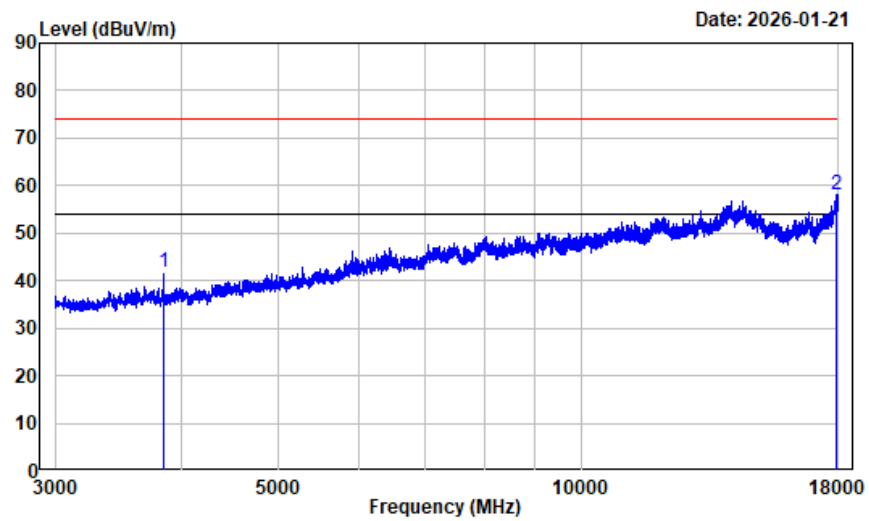

Condition : Vertical
 Project No. : 2501A92967E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : ANT2_D8PSK_1924.992MHz


		Read		Limit	Over	Remark
Freq		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3849.980	-10.01	51.77	41.76	74.00	-32.24	Peak
2 17896.880	9.03	49.01	58.04	74.00	-15.96	Peak

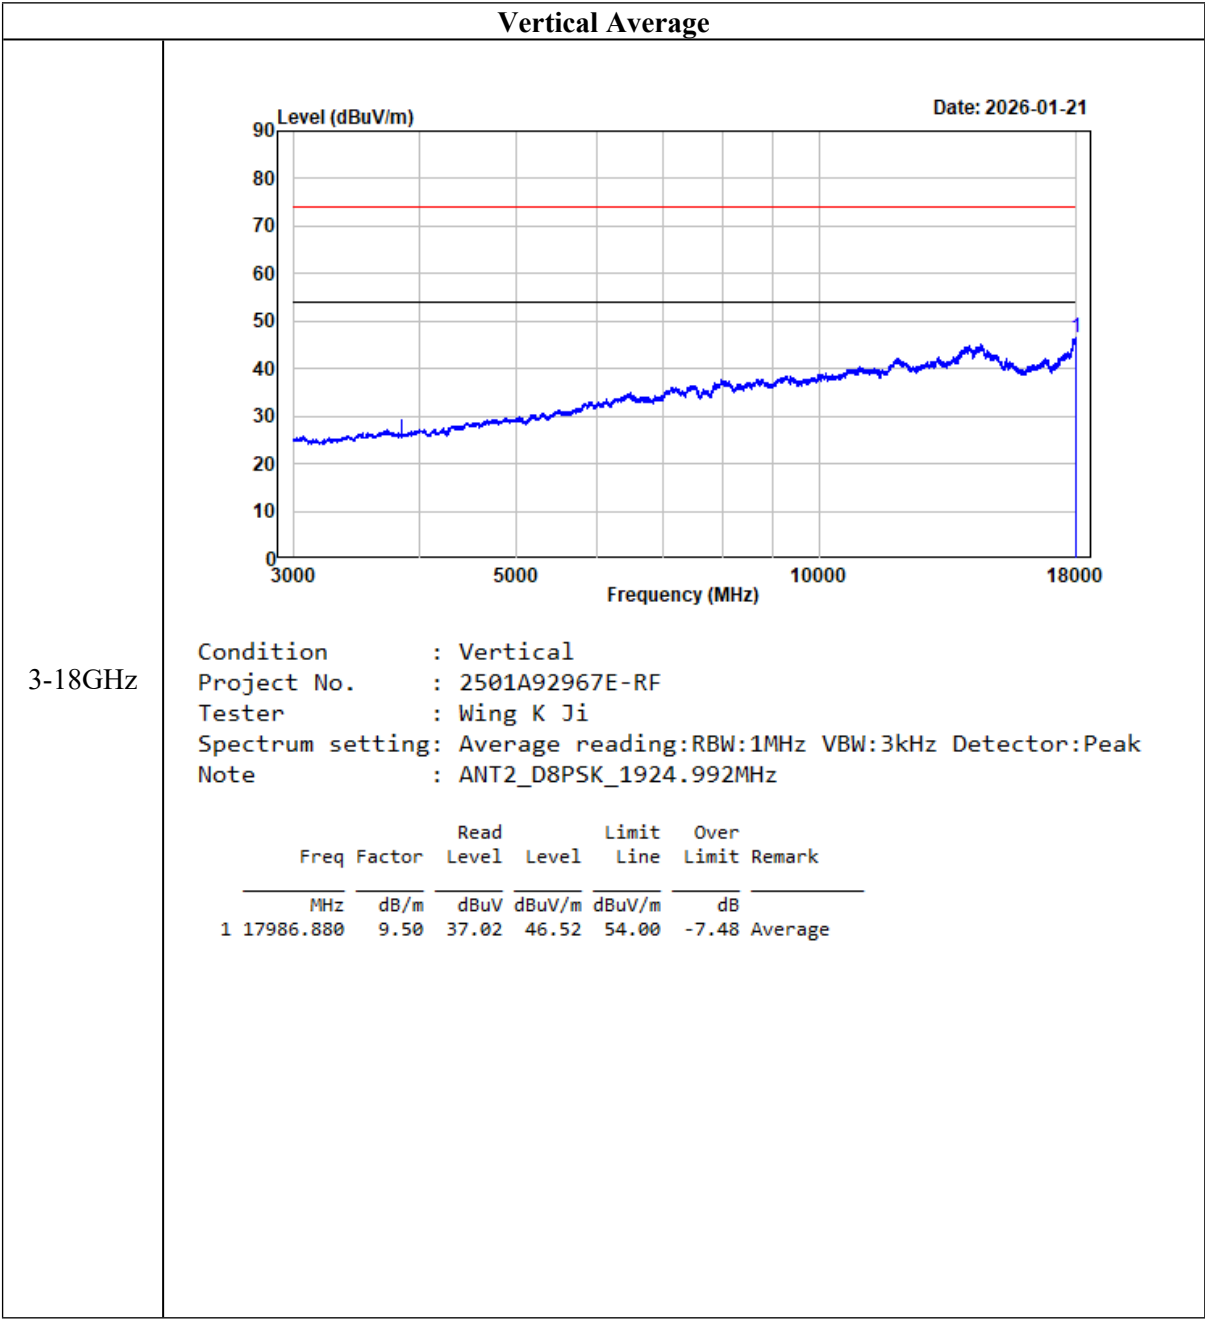

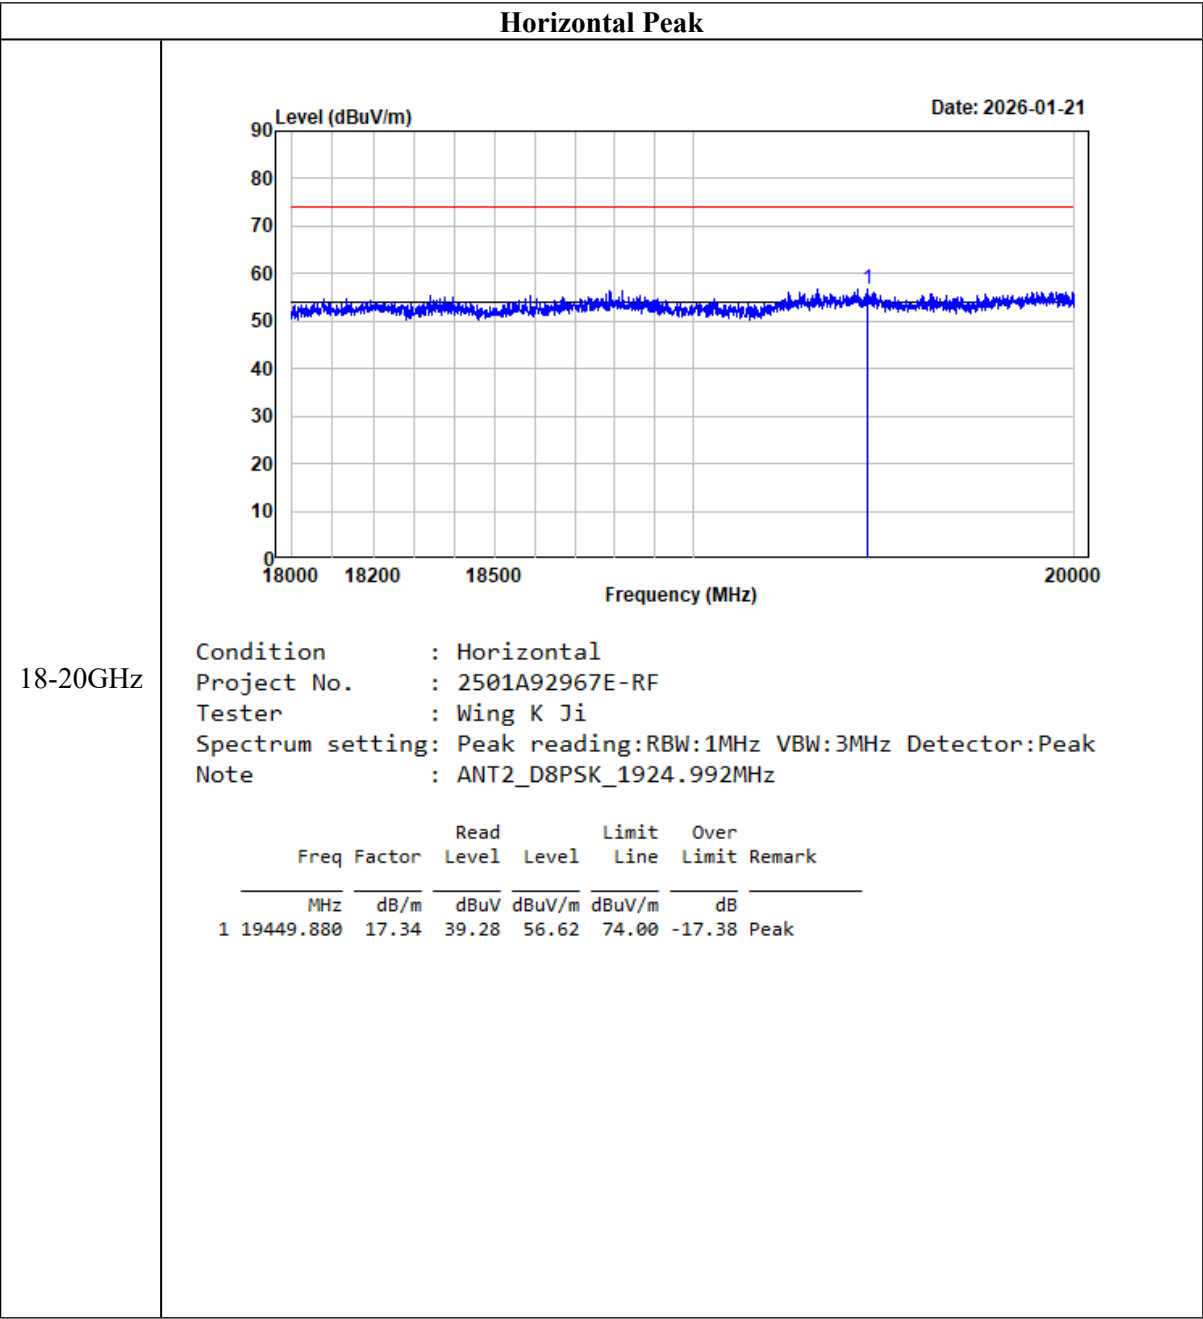


Horizontal Average

18-20GHz

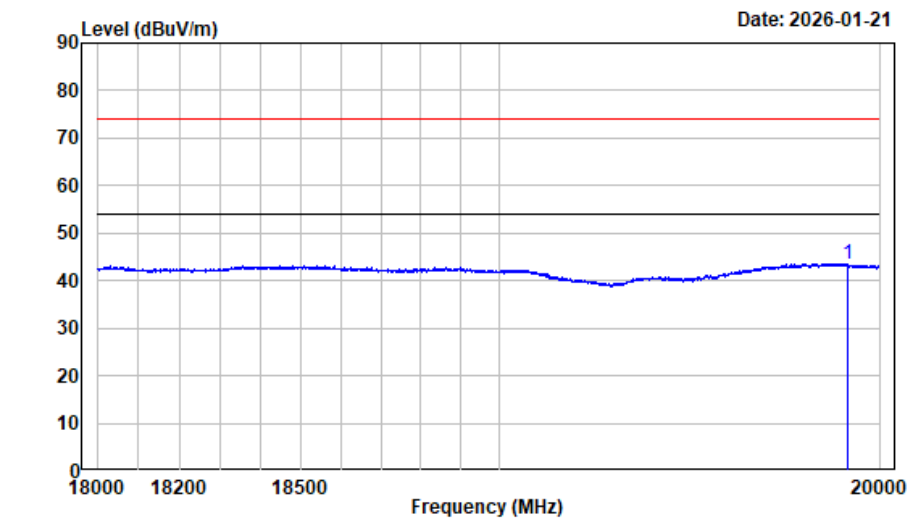


Condition : Horizontal
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_D8PSK_1924.992MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19914.200		17.80	25.70	43.50	54.00	-10.50	Average

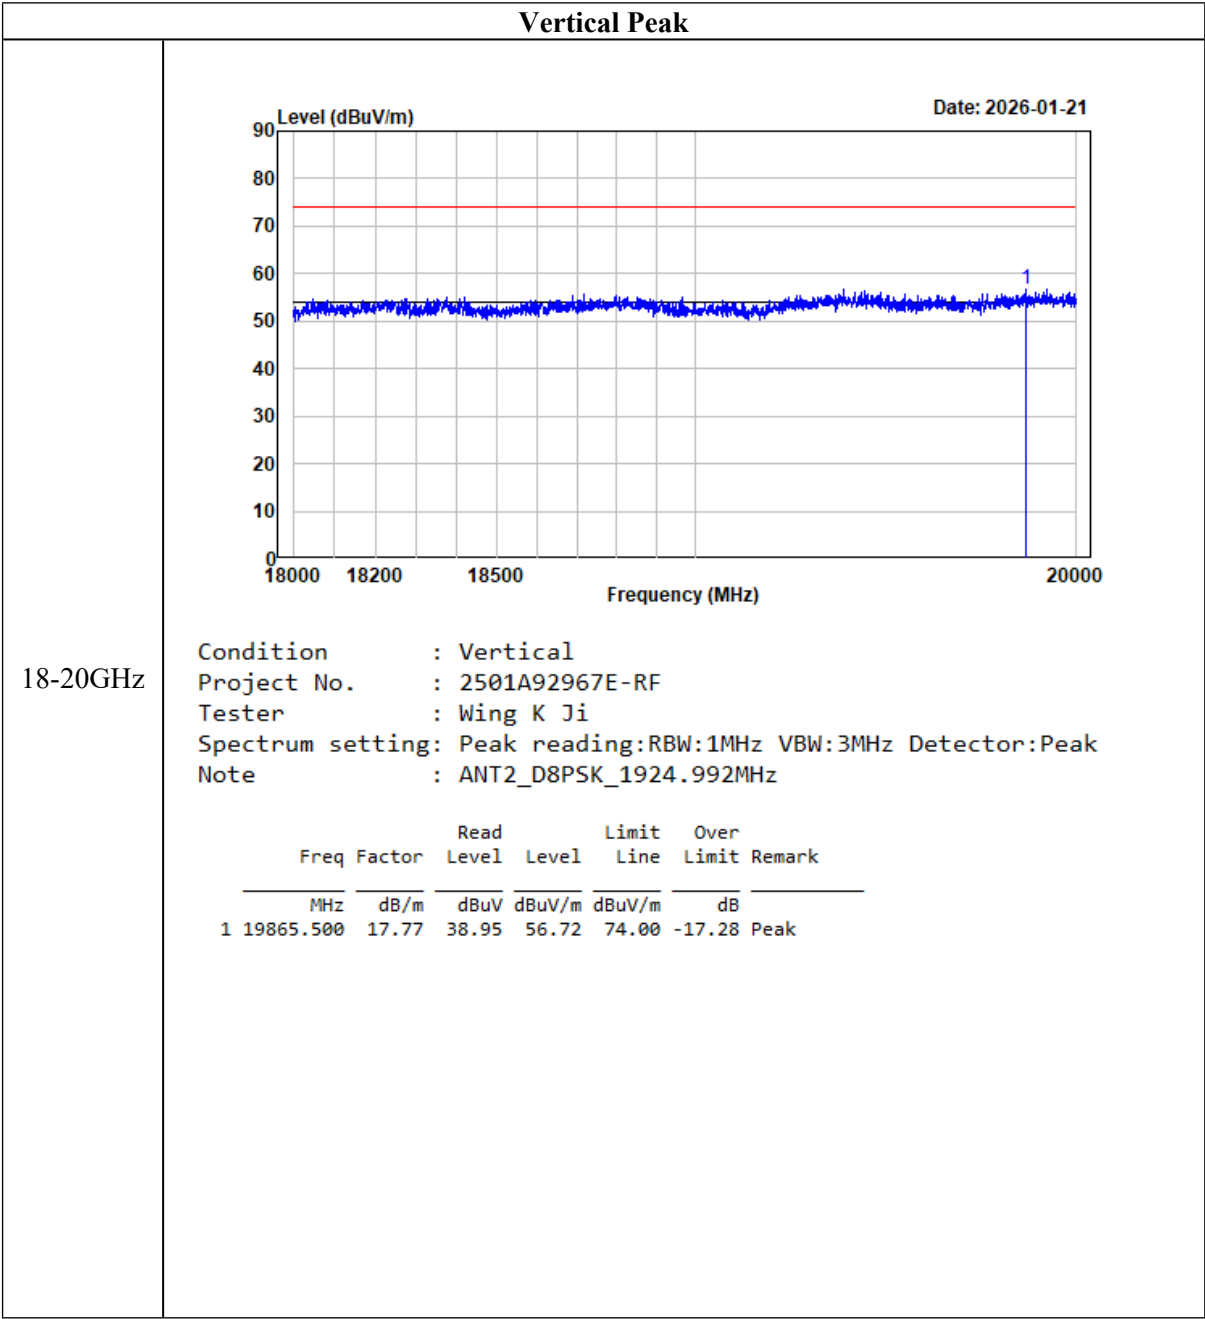

Vertical Average

18-20GHz

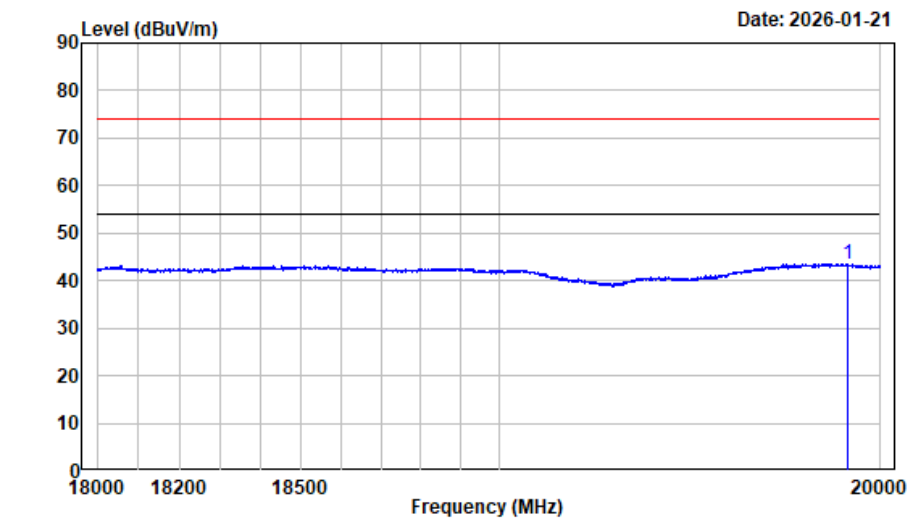

Condition : Vertical
Project No. : 2501A92967E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : ANT2_D8PSK_1924.992MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 19913.630		17.80	25.80	43.60	54.00	-10.40	Average

FCC § 15.323 (f) & RSS-213 §5.3 FREQUENCY STABILITY

Applicable Standard

Per §15.323(f) & ANSI C63.17-2013 Clause 6.2.1, the frequency stability of the carrier frequency of the intentional radiator shall be maintained within ± 10 ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20°C to $+50^{\circ}\text{C}$ or as declared by the manufacturer at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20°C . For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

According to RSS-213 Issue 3 (2015-03) § (5.3):

The carrier frequency stability shall be maintained within ± 10 ppm ($\pm 0.001\%$).

According to RSS-Gen Issue 5 (2021-02) § (6.11):

For license-exempt devices, the following conditions apply:

- a. at the temperatures of -20°C (-4°F), $+20^{\circ}\text{C}$ ($+68^{\circ}\text{F}$) and $+50^{\circ}\text{C}$ ($+122^{\circ}\text{F}$), and at the manufacturer's rated supply voltage
- b. at the temperature of $+20^{\circ}\text{C}$ ($+68^{\circ}\text{F}$) and at $\pm 15\%$ of the manufacturer's rated supply voltage


Test Procedure

This procedure should be carried out for each of the following test cases:

Temperature	Supply Voltage
20°C	85-115% or new batteries
-20°C	Normal
$+50^{\circ}\text{C}$	Normal

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

Using the mean carrier frequency at 20°C and at nominal supply voltage as the reference, the mean carrier frequency shall be maintained within ± 10 ppm at the two extreme temperatures (or as declared by the manufacturer) and at normal temperature (typically 20°C) at the two extreme supply voltages. This test does not apply to a EUT that is capable only of operating from a battery.

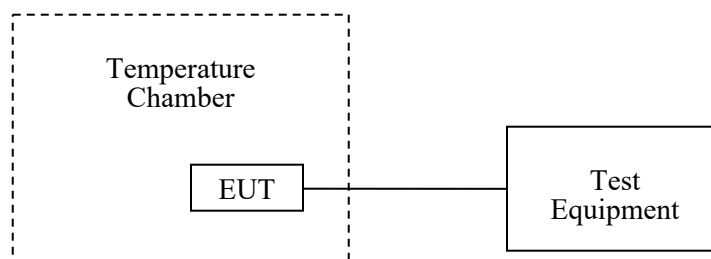

Test Data**Environmental Conditions**

Temperature:	25.5~25.6 °C
Relative Humidity:	45~49 %
ATM Pressure:	100.7~101 kPa

The testing was performed by Cheeb Huang on 2026-01-31.

Test Result: Compliant

Test mode: Transmitting

Adapter:**GFSK:**

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ☒)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	5.0	1924.992	6	3.12	±10
20	4.25	1924.992	3	1.56	±10
	5.75	1924.992	7	3.64	±10
50	5.0	1924.992	4	2.08	±10

 $\pi/2$ -DBPSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ☒)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	5.0	1924.992	-2	-1.04	±10
20	4.25	1924.992	-5	-2.60	±10
	5.75	1924.992	-3	-1.56	±10
50	5.0	1924.992	-6	-3.12	±10

 $\pi/4$ -DQPSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ☒)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	5.0	1924.992	-1	-0.52	±10
20	4.25	1924.992	-3	-1.56	±10
	5.75	1924.992	-2	-1.04	±10
50	5.0	1924.992	-5	-2.60	±10

$\pi/8$ -D8PSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ⊗)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	5.0	1924.992	-1	-0.52	±10
20	4.25	1924.992	-3	-1.56	±10
	5.75	1924.992	2	1.04	±10
50	5.0	1924.992	-2	-1.04	±10

POE:**GFSK:**

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ⊗)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	55	1924.992	5	2.60	±10
20	46.75	1924.992	6	3.12	±10
	63.25	1924.992	5	2.60	±10
50	55	1924.992	2	1.04	±10

 $\pi/2$ -DBPSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ⊗)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	55	1924.992	-8	-4.16	±10
20	46.75	1924.992	-3	-1.56	±10
	63.25	1924.992	-2	-1.04	±10
50	55	1924.992	-7	-3.64	±10

 $\pi/4$ -DQPSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ⊗)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	55	1924.992	-3	-1.56	±10
20	46.75	1924.992	-3	-1.56	±10
	63.25	1924.992	-4	-2.08	±10
50	55	1924.992	-2	-1.04	±10

$\pi/8$ -D8PSK:

Temperature (°C)	Voltage (V _{AC} □, V _{DC} ⊗)	Channel Frequency (MHz)	Measured Frequency Offset (kHz)	Measured Frequency Offset (ppm)	Limit (ppm)
-20	55	1924.992	-2	-1.04	±10
20	46.75	1924.992	-1	-0.52	±10
	63.25	1924.992	3	1.56	±10
50	55	1924.992	-3	-1.56	±10

Note: the extreme test condition was declared by applicant.

FCC § 15.323 (c)(e) § 15.319 (f) & RSS-213 §5.1&§5.2 SPECIFIC REQUIREMENTS FOR UPCS DEVICE

Applicable Standard

FCC §15.323(c)(e) & §15.319(f) Specific Requirements for UPCS device.

ANSI C63.17 2013 §6.2 Frequency and time stability and §7. Monitoring tests and §8. Time and spectrum window access procedure.

According to RSS-213 §5.1&§5.2 type of modulation and access protocol


Equipment certified under this standard shall use digital modulation.

In order to provide equitable access to the radio frequency spectrum, the licence-exempt PCS device must possess an access protocol.

Test Procedure

Measurement method according to ANSI C63.17- 2013

Test configuration as below

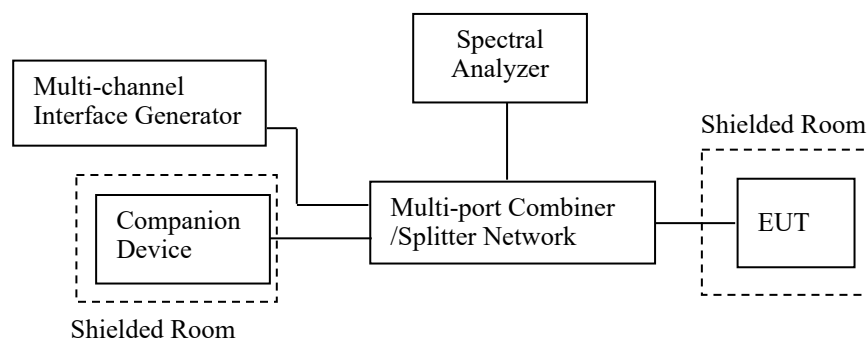

Test Data

Environmental Conditions

Temperature:	25.6 °C
Relative Humidity:	49 %
ATM Pressure:	100.7 kPa

The testing was performed by Cheeb Huang on 2026-01-31.

Test Result: Compliant

Please see the below data

1) Automatic Discontinuation of Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Test result:

The following tests were performed after a connection had been established with Handset.

Test condition	Reaction of EUT	Pass/Fail
Adapter removed from EUT	Connection break down	Pass

2) Monitoring Time

Immediately prior to initiating transmission, devices must monitor the combined time and spectrum window in which they intend to transmit. For a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period

Test procedure:

Measurement method is in according to ANSI C63.17 -2013 clause 7.3.3.

RF signal generators apply uniform CW interference on all system carriers except two carriers (designated f_1 and f_2), each at level $T_L + U_M$. EUT can only transmit on these two carriers.

Test result:

This requirement is covered by the results of Least Interfered Channel (LIC).

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L + U_M + 20\text{dB}$ and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level $T_L + U_M + 20\text{dB}$ and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

3) Lower Monitoring Threshold

The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

Test procedure:

Measurement method according to ANSI C63.17 -2013 clause 7.3.1

Test result:

Not applicable because the EUT has more 40 defined duplex system access channels and meet the provision of the Least Interfered Channel (LIC).

4) Maximum Transmit Period

If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.

Test procedure:

The test procedure is as follows:

- a) Activate the EUT and initiate a communication channel with the companion device, and start a timer or frame counter.
- b) The centre frequency of spectrum analyzer was set to the carrier frequency and SPAN was set to ZERO. The spectrum analyzer was used to monitor the time and spectrum window of the communication channel.
- c) Stop the timer at the end of the EUT transmission on the current time and frequency window (measure the time until the EUT changes to a different slot).

Test result:

Repetition of Access Criteria	Measured Maximum Transmission Time (Second)	Limit (Second)	Results
First	17760	28,800	Pass
Second	17788	28,800	Pass

5) System Acknowledgement

Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease.

Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

Test procedure:

Measurement method according to ANSI C63.17 2013 clause 8.1, 8.2, 8.2.1

During testing initial transmission without acknowledgement, the signal from the EUT to the companion device is blocked by the circulator.

The test of the transmission time after loss of acknowledgements is performed by cutting off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

Test result:

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.31	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	5.5	30	Pass

Note: N/A=Not Applicable

6) Least Interfered Channel (LIC)

If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.

A device utilizing the provisions of this paragraph (5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.

The power measurement resolution bandwidth for this comparison must be accurate to within 6 dB. No device or group of cooperating devices located within 1 metre of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold: $T_L = -174 + 10\log_{10}B + M_L + P_{MAX} - P_{EUT}$ (dBm)

Where: B=Emission bandwidth (Hz)

M_L = dB the threshold may exceed thermal noise (30 for T_L)

$P_{MAX} = 5\log_{10}B - 10$ (dBm)

P_{EUT} = Transmitted power (dBm)

Calculated thresholds:

Monitor Threshold	B(MHz)	M _L (dB)	P _{MAX} (dBm)	P _{EUT} (dBm)	Threshold (dBm)
Lower threshold	1.720	30	21.18	18.94	-79.41

Note: 1.The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels

Test procedure:

Measurement method according to ANSI C63.17 clause 7.3.2, 7.3.3

C63.17 clause 7.3.2, LIC procedure test:

- a) Allow EUT transmission on only two carrier frequencies, which will be designated f_1 and f_2 .
- b) Apply interference to the EUT on f_1 at a level of $TL + UM + 7$ dB and on f_2 at a level of $TL + UM$. Initiate transmission. The EUT should transmit on f_2 . Terminate the connection. Repeat five times. If the EUT transmits once on f_1 , the test failed.
- c) Apply interference to the EUT on f_1 at a level of $TL + UM$ and on f_2 at a level of $TL + UM + 7$ dB. Initiate transmission. The EUT should transmit on f_1 . Terminate the connection. Repeat five times. If the EUT transmits once on f_2 , the test failed.
- d) Apply interference to the EUT on f_1 at a level of $TL + UM + 1$ dB and on f_2 at a level of $TL + UM - 6$ dB. Initiate transmission. If the EUT transmits on f_2 , terminate the connection. Repeat five times. If the EUT transmits once on f_1 , the test failed.
- e) Apply interference to the EUT on f_1 at a level of $TL + UM - 6$ dB and on f_2 at a level of $TL + UM + 1$ dB. Initiate transmission. If the EUT transmits on f_1 , terminate the connection. Repeat five times. If the EUT transmits once on f_2 , the test failed.

C63.17 clause 7.3.3, Selected channel confirmation:

- a) Allow EUT transmission on only two carrier frequencies, which will be designated f_1 and f_2 . This limitation to carriers f_1 and f_2 is performed preferably by administration commands for the EUT, or alternatively by applying by a multicarrier interference generator uniform interference on all system carriers except f_1 and f_2 , at a level of $TL + UM + 20$ dB in-band per carrier. Set the interference level to the EUT on f_1 to a level of $TL + UM + 20$ dB, and let there be no interference applied on f_2 .
- b) Initiate transmission and verify that the EUT transmits on f_2 . If a connection was made, terminate it.
- c) Apply interference on f_2 at a level of $TL + UM + 20$ dB in-band, and immediately remove all interference from f_1 and immediately (but not sooner than 20 ms after the interference on f_2 is applied) cause the EUT to attempt transmission. The EUT should now transmit on f_1 , if it transmits.
- d) If the EUT transmits on f_2 , it fails.

Test result:**1) LIC procedure test:**

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction of EUT	Results
a) Apply the interference on f_1 at level $T_L+U_M+7\text{dB}$ and the interference on f_2 at level T_L+U_M . Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
b) Apply the interference on f_1 at level T_L+U_M and the interference on f_2 at level $T_L+U_M+7\text{dB}$. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass
c) Apply the interference on f_1 at level $T_L+U_M+1\text{dB}$ the interference on f_2 at level $T_L+U_M-6\text{dB}$. Initiate transmission and verify the transmission only on f_2 . Repeat 5 times.	EUT transmits on f_2	Pass
d) Apply the interference on f_1 at level $T_L+U_M-6\text{dB}$ and the interference on f_2 at level $T_L+U_M+1\text{dB}$. Initiate transmission and verify the transmission only on f_1 . Repeat 5 times.	EUT transmits on f_1	Pass

2) Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction of EUT	Results
a) Apply the interference on f_1 at level T_U+U_M and no interference on f_2 . Initiate transmission and verify the transmission only on f_2 . Then terminate it.	EUT transmits on f_2	Pass
b) Apply the interference on f_2 at level T_L+U_M and immediately remove all interference from f_1 . The EUT should immediately attempt transmission on f_1 (but at least 20 ms after the interference on f_2 is applied), verify the transmission only on f_1 .	EUT transmission f_1	Pass

7) Random waiting

If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same window after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

Test procedure:

This test is for EUTs that transmit control and signaling channels and that use the provisions of FCC §15.323(c)(6) & IC RSS-213 5.2(6), thus to verify that the EUT (if in deferral) waits for a channel to go clear, then implements a 10 ms to 150 ms hold off prior to using the channel. FCC §15.323(c)(6) is not restrictive for EUTs that use the LIC and offer 20 or more duplex communications channels, as a combined time and spectrum window cannot become unavailable as there is no threshold limit. Test method according to ANSI C63.17 2013 clause 8.1.2 or 8.1.3

- Restrict operation of the EUT to a single carrier designated f_1 . For TDMA system, further restrict EUT transmission to a single timeslot of the usable timeslots available in the TDMA frame structure and synchronize the interference so as to occur centered within the timeslot.

- b) Activate the EUT with no interference present. The EUT must transmit on f_1 . Then apply CW interference on f_1 . The interference level shall be at $TL + UM$ as appropriate for EUTs that do or do not meet the requirements for using the upper threshold. The EUT must stop transmitting within 30 s.
- c) Cancel the interference. Measure the time interval between the end of the interference transmission and the beginning of transmission by the EUT.
- d) Repeat step b) and step c) 100 times. If the measured time intervals vary uniformly between 10 ms and 150 ms, the EUT passes the test.

Note: This is Not Applicable

8) Monitoring Bandwidth and Reaction Time

The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than $50\sqrt{1.25/\text{emission bandwidth in MHz}}$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds.

Note: Testing of the monitoring system bandwidth is not required if the designed bandwidth from the manufacturer is available and given in the test report.

The maximum reaction time of the monitor shall be less than $50\sqrt{1.25/\text{occupied bandwidth in MHz}}$ μs for signals at the applicable threshold level but shall not be required to be less than 50 μs .

If a signal of 6 dB or more above the threshold level is detected, the maximum reaction time shall be $35\sqrt{1.25/\text{occupied bandwidth in MHz}}$ μs but shall not be required to be less than 35 μs .

Test procedure:

Measurement method according to ANSI C63.17 2013 clause 7.4 & 7.5

- a) Restrict the EUT to a single transmit carrier frequency f_1 , and verify that the EUT can establish a connection with no interference applied on f_1 .
- b) Apply time-synchronized, pulsed interference on f_1 at the pulsed level $TL + UM$, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of 50 μs and $50\sqrt{1.25/B}$ μs , where B is the emission bandwidth of the EUT in megahertz.
- c) With the channel interference level 6 dB above $TL + UM$, verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of 35 μs and $35\sqrt{1.25/B}$ μs , where B is the emission bandwidth of the EUT in megahertz.

Test Pulse width Equation (μs)	B(bandwidth) (MHz)	Pulse width (μs)	Limit (largest) (μs)
$50 (1.25/B)^{1/2}$	1.72	42.62	50
$35 (1.25/B)^{1/2}$	1.72	29.84	35

Test result:**1) Monitoring Bandwidth:**

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission

2) Reaction Time Test:

No.	Interference Pulse width (μ s)	Reaction of EUT	Observing time (μ s)	Result
1	50 μ s with level T_L+U_M	No transmission	27.55	Pass
2	35 μ s with level T_L+U_M+6 dB	No transmission	25.63	Pass

9) Monitoring Antenna

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

Test procedure:

Measurement method according to ANSI C63.17 -2013 paragraph 4

Test result:

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

10) Monitoring threshold relaxation

Devices that have a power output lower than the maximum permitted under the rules can increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

Test procedure:

Measurement method according to ANSI C63.17 -2013 clause 7.4 & paragraph 4

Test result:

This requirement is covered by the results of Least Interfered Channel (LIC).

11) Duplex Connections

An initiating device may attempt to establish a duplex connection by monitors both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

Test procedure:

This test validates proper operation of an EUT that operates according to the provisions of FCC §15.323(c)(10) using a check of both transmit and receive channels on one end of the link to qualify both ends of the link for transmissions. Test method according to ANSI C63.17 clause 8.3.2 Validation of dual access criteria check for EUTs that implement the upper threshold

- a) Adjust the path loss between the EUT and its companion device such that the received signal to the EUT from the companion device is at least 40 dB above $TL + UM$.
- b) Restrict the EUT and its companion device to operation at a single carrier f_1 for TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems. Verify that the EUT and its companion device can establish a connection on a time/spectrum window on the enabled carrier(s). Terminate the connection.
- c) Apply interference to the EUT on the EUT's *transmit* time/spectrum windows at $TL + UM$ per carrier on all time/spectrum windows except for one, which has interference at least 10 dB below TL . Adjust the interference to the EUT on its *receive* time/spectrum windows such that a single time/spectrum window has interference at least 10 dB below TL , and the interference on the other time/spectrum windows is at $TL + UM + 7$ dB. The interference to the companion device should be at least 10 dB below TL on all active time/spectrum windows. The interference-free *receive* time/spectrum window must not be the duplex mate of the interference-free *transmit* time/spectrum window.
- d) Cause the EUT to attempt to establish a connection. The connection should be made on the interference-free *receive* time/spectrum window and its duplex mate. Otherwise, the EUT fails the test.
- e) If a connection exists, terminate it. Reduce the interference on the EUT's *receive* time/spectrum windows to a level of $TL + UM$ per carrier on all time/spectrum windows except for one, which has interference at least 10 dB below TL . Raise the interference on the EUT's *transmit* time/spectrum windows to a level of $TL + UM + 7$ dB, maintaining one time/spectrum window with interference at least 10 dB below TL . The interference to the companion device should be at least 10 dB below TL on all active time/spectrum windows. Again, the interference-free *transmit* and *receive* time/spectrum windows should not constitute a duplex pair if the system designates a specific duplex pairing for time/spectrum windows.
- f) Cause the EUT to attempt to establish a connection. The connection should be made on the interference-free *transmit* time/spectrum window and its duplex mate. Otherwise, the system fails the test.
- g) Terminate the connection and raise the interference to the EUT on all of the EUT's *transmit* and *receive* time/spectrum windows to $TU + UM$ per carrier on all time/spectrum windows except for a single *transmit* time/spectrum window and a single *receive* time/spectrum window, which shall have interference at least 10 dB below TL . The low-interference *transmits* and *receives* time/spectrum windows shall not constitute a duplex pair. Adjust the path loss between the EUT and its companion device such that the received signal to the EUT from the companion device is at least 30 dB above TU . Cause the EUT to attempt to establish a connection. If a connection is established, the test fails.

Test result:

Interference (Refer to ANSI C63.17 § 8.3& § 8.3.2)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) All Tx windows with level $TL+UM$ except one & Rx windows with level $TL+UM+7dB$ except one, which are not the duplex mate.	Connected on the target Rx window and its duplex mate.	Pass
c) All Tx windows with level $TL+UM+7dB$ except one & Rx windows with level $TL+UM$ except one, which are not duplex mate.	Connected on the target Tx window and its duplex mate.	Pass
d) All Tx & Rx windows with level $TU+UM$, except one for Tx window & one for Rx window, which are not duplex mate.	No connection possible	Pass

12) Alternative monitoring interval

An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

Test procedure:

This test validates the ability of the EUT to distinguish between same-system and other-system interference for purposes of satisfying the requirement of 47CFR15.323(c) (11). Test method according to ANSI C63.17 2013 clause 8.4

- Adjust the path loss between the EUT and its companion device such that the received signal to the EUT from the companion device is at least 30 dB above TL .
- Restrict the EUT and its companion device to operation at a single carrier f_1 for TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems. Verify that the EUT and its companion device can establish a connection.
- Apply interference at $TL + UM$ per carrier to the EUT on all *transmit* time/spectrum windows on the enabled carrier(s). The interference must use the same physical layer parameters (modulation, frame format, etc.) as the EUT transmissions, but with a system identifier different from that used by the EUT and the companion device. Ensure that the interference level at the companion device is at least 10 dB below TL . Apply no interference to the *receive* time/spectrum windows on the enabled carriers.
- Cause the EUT to attempt to establish a connection. If a connection is established, the test fails.

Test result:

Interference (Refer to ANSI C63.17 § 8.4)	Reaction of EUT	Results
a) Only a single carrier f_1 for EUT TDMA systems and on f_1 and f_2 and corresponding duplex carriers for FDMA systems.	EUT can transmit	Pass
b) Apply interference with same parameters as EUT transmissions on all Tx windows with level TL+UM on the enabled carrier(s) and no interference on the Rx windows on the enabled carriers.	No connection is established	Pass

IC:

Not appropriate, as the system always monitor both the transmit and receive time/spectrum windows, it is not a co-located device.

13) Fair Access

The provisions of FCC §15.323 (c) & paragraphs 5.2 (10) or (11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

Test result:

The manufacturer declares that this device does not use any mechanisms as provided by FCC §15.323(c)(10) or (11) & IC RSS-213 5.2(10) and (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

14) Frame Repetition Stability Frame Period and Jitter

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

Test procedure:

Measurement method according to ANSI C63.17 2013 clause 6.2.2, 6.2.3

Test result:

Frame Period and Jitter:

Max. pos. Jitter (μ s)	Max. neg. Jitter (μ s)	Frame period (ms)	Limit	
			Frame Period (ms)	Jitter (μ s)
0.05	-0.01	10.96	20 or 10/X	25

Note: X is a positive whole number.

EUT PHOTOGRAPHS

Please refer to the attachment 2501A92967E-RF-EXP External photo and 2501A92967E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2501A92967E-RF-TSP Test Setup photo.

******* END OF REPORT *******