

TEST REPORT

Test report no.: 1-9318-25-02-03_TR1-R02



Deutsche
Akkreditierungsstelle
D-PL-12047-01-00

Testing laboratory

cetecom advanced GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://cetecomadvanced.com>

e-mail: mail@cetecomadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS).

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number:

D-PL-12047-01-00.

ISED Testing Laboratory Recognized Listing Number: DE0001

FCC designation number: DE0002

Applicant

Panasonic Industrial Devices Europe GmbH

Zeppelinstrasse 19

21337 Lüneburg / GERMANY

Phone: +49-4131-899-0

Contact: Marcus Nottorf

e-mail: marcus.nottorf@eu.panasonic.com

Manufacturer

Panasonic Industrial Devices Europe GmbH

Zeppelinstrasse 19

21337 Lüneburg / GERMANY

Test standard/s

FCC 47 CFR Part 15

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS-247:Issue 4 (2025-07)

RSS-247 – Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: WiFi / BLE Module

Model name: PAN W602-2C
PAN W602-2B

FCC ID: T7V-W602

ISED certification number: 216Q-W602

Frequency: 2400 MHz to 2483.5 MHz

Technology tested: WLAN


Antenna: Integrated chip antenna

Power supply: 3.3 V DC by PCB

Temperature range: -40°C to +85°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:



cn=Marco Bertolino, o=cetecom advanced GmbH, ou=BTL-251205, email=Marco.Bertolino@cetecomadvanced.com, c=DE
2026.06.30 13:29:14 +02'00'

Marco Bertolino
Supervisor Radio Lab
Regulatory Services Radio

Test performed:



cn=David Lang, o=cetecom advanced GmbH, ou=LNG-230530, email=david.lang@cetecomadvanced.com, c=DE
2026.06.30 13:23:54 +02'00'

David Lang
Coordinator Area
Regulatory Services Radio

1 Table of contents

1	Table of contents.....	2
2	General information.....	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Description of the test setup.....	7
7.1	Shielded semi anechoic chamber	8
7.2	Shielded fully anechoic chamber.....	9
7.3	Radiated measurements > 18 GHz	11
7.4	Conducted measurements with peak power meter & spectrum analyzer	12
7.5	AC conducted.....	13
8	Sequence of testing.....	14
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	14
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	15
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	16
8.4	Sequence of testing radiated spurious above 18 GHz.....	17
9	Measurement uncertainty	18
10	Summary of measurement results	19
11	Additional information and comments	20
12	Additional EUT parameter	21
13	Measurement results	22
13.1	Antenna gain	22
13.2	Identify worst case data rate.....	23
13.3	Maximum output power	24
13.4	Duty cycle	25
13.5	Peak power spectral density	26
13.6	6 dB DTS bandwidth	28
13.7	Occupied bandwidth – 99% emission bandwidth.....	29
13.8	Occupied bandwidth – 20 dB bandwidth	30
13.9	Band edge compliance radiated.....	31
13.10	Spurious emissions conducted	40
13.11	Spurious emissions radiated below 30 MHz	41
13.12	Spurious emissions radiated 30 MHz to 1 GHz	48
13.13	Spurious emissions radiated above 1 GHz	54
13.14	Spurious emissions conducted below 30 MHz (AC conducted).....	62
14	Glossary	67
15	Document history	68

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. cetecom advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of cetecom advanced GmbH.

The testing service provided by cetecom advanced GmbH has been rendered under the current "General Terms and Conditions for cetecom advanced GmbH".

cetecom advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the cetecom advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the cetecom advanced GmbH test report include or imply any product or service warranties from cetecom advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by cetecom advanced GmbH.

All rights and remedies regarding vendor's products and services for which cetecom advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by cetecom advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-9318-25-02-03_TR1-R01 and dated 2026-06-29.

2.2 Application details

Date of receipt of order:	2026-05-11
Date of receipt of test item:	2026-05-28
Start of test:*	2026-05-28
End of test:*	2026-06-10
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

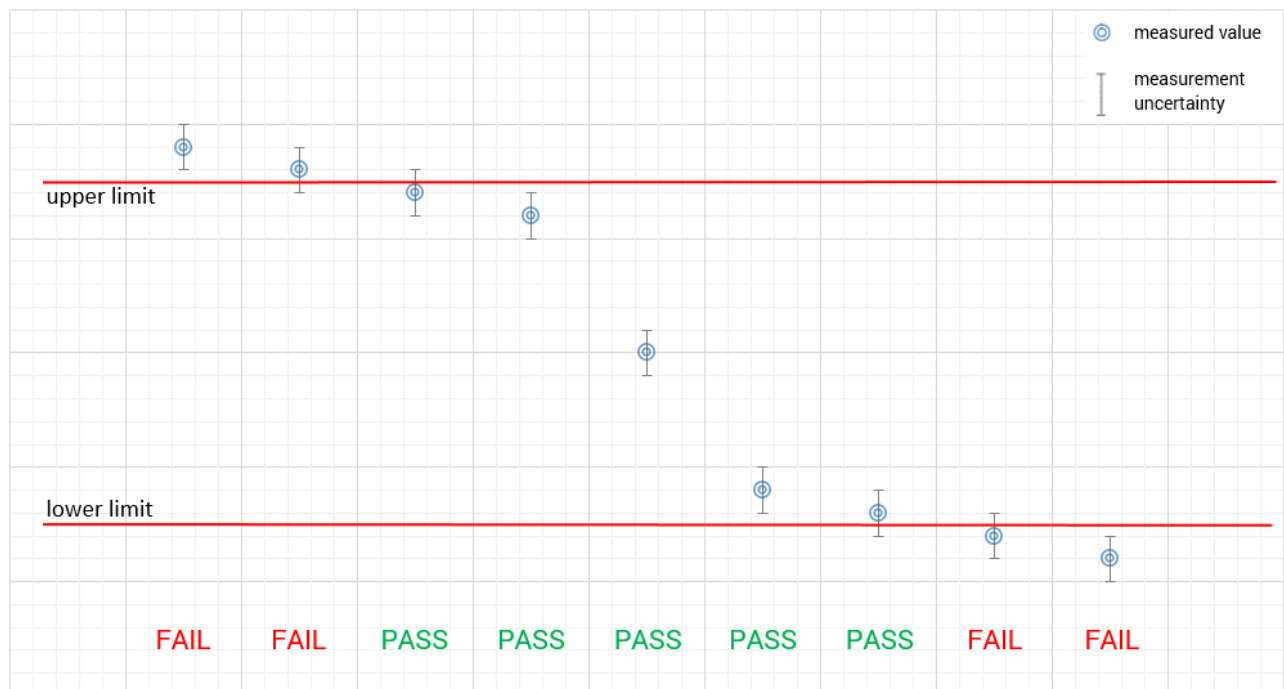
Test standard	Date	Description
FCC 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS-247:Issue 4 (2025-07)	2025-07-24	RSS-247 – Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
RSS-Gen:Issue 5 (2018-04) + Amendment 1 (2019-03) + Amendment 2 (2021-02)	2021-02-01	General Requirements for Compliance of Radio Apparatus
Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.10-2020	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI/USEMCSC C63.10a-2024 Amendment 1	2024-08-08	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Amendment 1
ANSI/USEMCSC C63.10a-2024 Amendment 1 Errata	2024-11-18	Errata to American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices Amendment 1 Correction Sheet

4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict



5 Test environment

Temperature	:	T _{nom} T _{max} T _{min}	+22 °C during room temperature tests No testing under extreme temperature conditions required No testing under extreme temperature conditions required
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	V _{nom} V _{max} V _{min}	3.3 V DC by PCB No testing under extreme voltage conditions required No testing under extreme voltage conditions required

6 Test item

6.1 General description

Kind of test item	:	WiFi / BLE Module
Model name	:	PAN W602-2C PAN W602-2B Note: The PAN W602-2B variant with U.FL connector has been used for conducted measurements while the W602-2C variant with chip antenna has been used for radiated measurements.
HMN	:	N/A
PMN	:	PAN W602-2C PAN W602-2B
HVIN	:	ENWF9215A ENWF9215C
FVIN	:	N/A
S/N serial number	:	Rad. Board 4 (30 MHz to 1 GHz tests), Board 9 (all other radiated tests) Cond. Board 5
Hardware status	:	03
Software status	:	01
Firmware status	:	TBD
Frequency band	:	2400 MHz to 2483.5 MHz
Type of radio transmission	:	DSSS, OFDM(A)
Use of frequency spectrum	:	
Type of modulation	:	CCK, (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11
Antenna	:	Integrated chip antenna
Power supply	:	3.3 V DC by PCB
Temperature range	:	-40°C to +85°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-9318-25-02-01_TR1-A101-R01
1-9318-25-02-01_TR1-A102-R01
1-9318-25-02-01_TR1-A104-R01

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

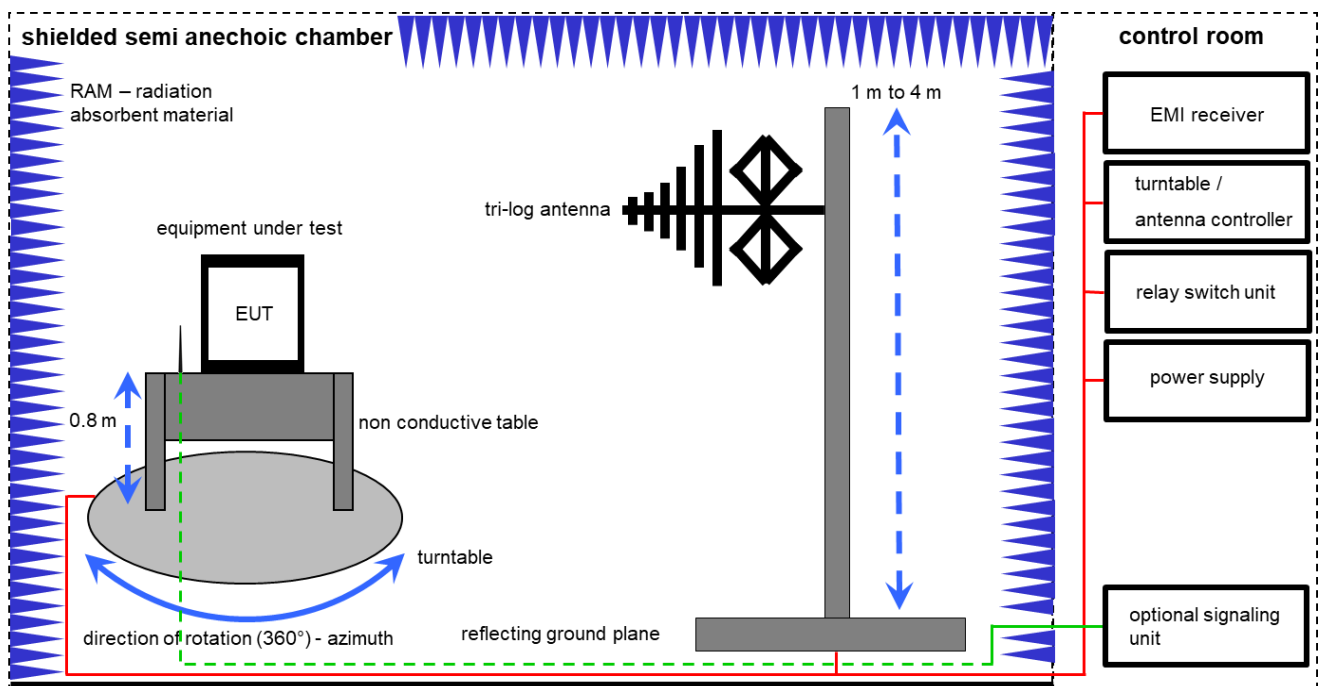
Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k/cal	calibration / calibrated	EK	limited calibration
Ne/cnn	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
Ev/chk	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress
cpu	check prior usage		

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

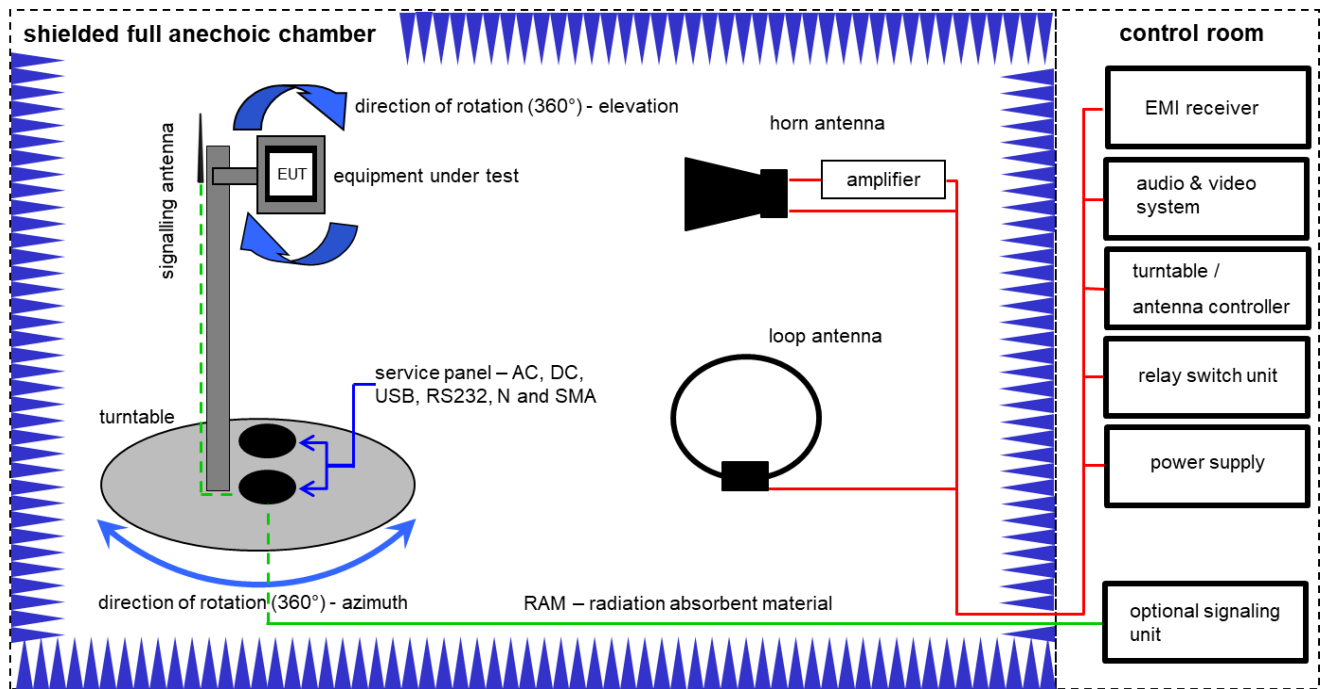
Example calculation:

FS [dBμV/m] = 12.35 [dBμV/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dBμV/m] (35.69 μV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	Switch-Unit 3488A	Hewlett Packard	2719A14505	50160	cpu	-/-	-/-
2	A	Positioning Controller	Positioning Controller 2090	ETS-Lindgren GmbH Taufkirchen	64672	50280	cnn	-/-	-/-
3	A	TRILOG Broadband Antenna	TRILOG Broadband Antenna VULB9163	Schwarzbeck MESS-ELEKTRONIK OHG Schönaun	1029	50403	cal	07.11.2025	30.11.2027
4	A	EMI Test Receiver	EMI Test Receiver ESR3 9kHz-3.6GHz	Rohde & Schwarz Messgerätebau GmbH Memmingen	102587	50417	cal	08.12.2025	31.12.2026

7.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)

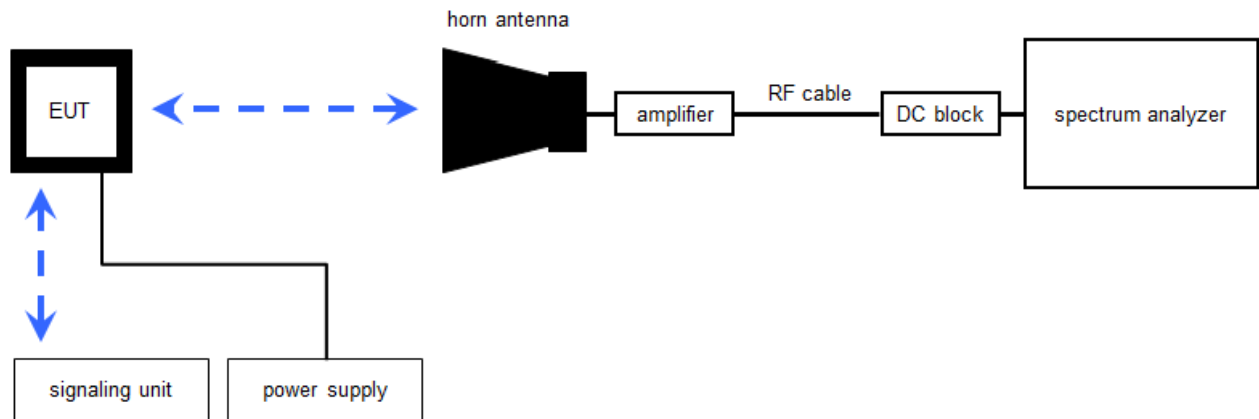
Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, C	Double-Ridged Waveguide Horn Antenna	Double-Ridged Waveguide Horn Antenna 3115	EMCO Elektronik GmbH Gilching	9107-3696	40342	cal	15.04.2025	30.04.2027
2	A, B, C	Anechoic chamber	Anechoic chamber FAC 3/5m	MEC Import: MWB TDK	87400/02	40349	cpu	-/-	-/-
3	A, B, C	Switch / Control Unit	Switch / Control Unit 3488A	Hewlett Packard	*	40350	cnn	-/-	-/-
4	C	Band Reject filter	Band Reject filter WRCG2400/2483-2375/2505-50/10SS	Wainwright Instruments GmbH Andechs	11	40356	cpu	-/-	-/-
5	C	Highpass Filter	Highpass Filter WHK1.1/15G-10SS	Wainwright Instruments GmbH Andechs	3	40361	cpu	-/-	-/-
6	C	Highpass Filter	Highpass Filter WHKX7.0/18G-8SS	Wainwright Instruments GmbH Andechs	19	40365	cnn	-/-	-/-
7	C	High Pass Filter	High Pass Filter VHF-3500+	Mini-Circuits Brooklyn	-/-	40369	cnn	-/-	-/-
8	A, C	Broadband Amplifier 0.5-18 GHz	Broadband Amplifier 0.5-18 GHz CBLU5184540	MEC Import: CERNEX	22049	40373	cpu	-/-	-/-
9	A, B, C	4U RF Switch Platform	4U RF Switch Platform L4491A	Agilent Technologies Deutschland GmbH Böblingen	MY50000037	40375	cnn	-/-	-/-
10	A, B, C	NEXIO EMV-Software	NEXIO EMV-Software BAT EMC V2022.0.32.0	MEC Import: Nexio	-/-	40383	cnn	-/-	-/-

11	C	RF-Amplifier	RF-Amplifier AMF-6F06001800-30-10P-R	MEC Import: NARDA-MITEQ Inc	2011572	40400	cpu	-/-	-/-
12	B	Active Loop Antenna	Active Loop Antenna 6502	EMCO Elektronik GmbH Gilching	2210	50044	cal	07.07.2025	31.07.2027
13	A, B, C	EMI Test Receiver	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH Memmingen	100037	50254	cal	11.12.2025	31.12.2026
14	C	Low Noise Amplifier	Low Noise Amplifier LNA-40-00100800-15-10P	Miteq Inc.	2336093	50483	cnn	-/-	-/-

7.3 Radiated measurements > 18 GHz

Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

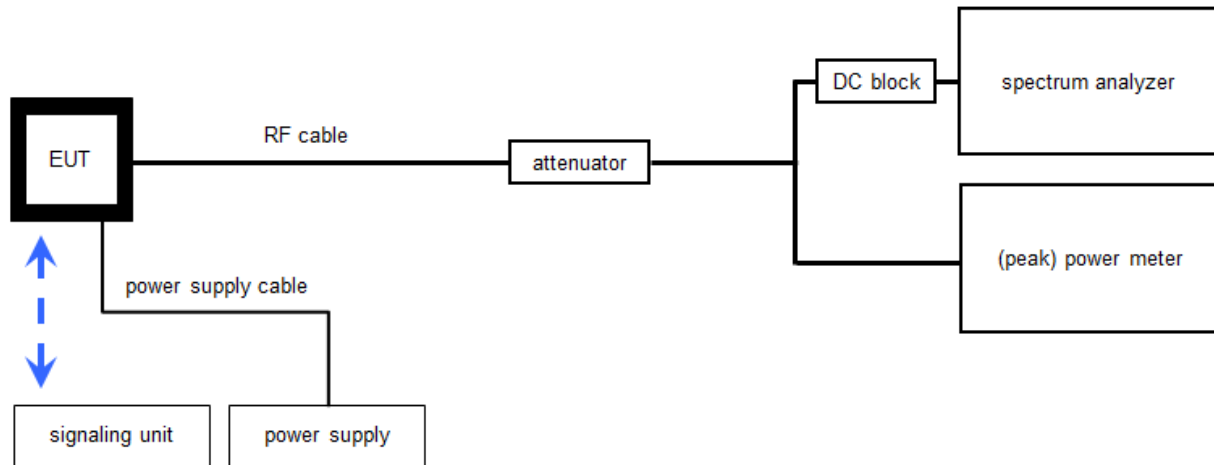
FS [dBμV/m] = 40.0 [dBμV/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dBμV/m] (6.79 μV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	Microwave System Amplifier, 0.5-26.5 GHz 83017A	Hewlett Packard	00419	40014	cpu	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	Std. Gain Horn Antenna 18.0-26.5 GHz 638	Narda Microwave	8205	40085	cal	16.01.2026	31.01.2028
3	A	Signal analyzer	Signal analyzer FSV40	Rohde & Schwarz Messgerätebau GmbH Memmingen	101042	40292	cal	08.01.2026	31.01.2027
4	A	RF-Cable	RF-Cable ST18/SMAM/SMAM /72	Huber & Suhner GmbH Unterhaching	Batch no. 699714	40389	cpu	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	DC-Blocker 0.1-40 GHz 8141A	MEC Import: Inmet	-/-	40390	cpu	-/-	-/-

7.4 Conducted measurements with peak power meter & spectrum analyzer

Conducted measurements normal conditions



WLAN tester version: 1.1.13

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

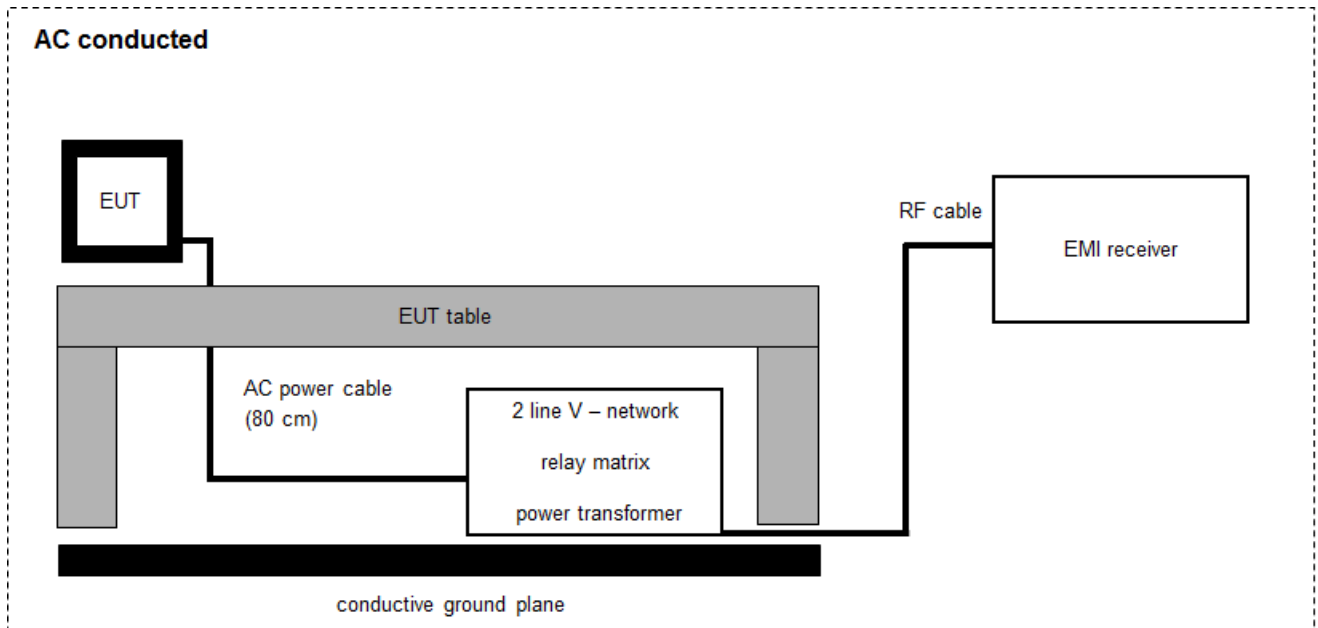
Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	Signal analyzer FSV40	Rohde & Schwarz Messgerätebau GmbH Memmingen	101042	40292	cal	08.01.2026	31.01.2027
2	A, B	RF-Cable	RF-Cable ST18/SMAM/SMAM /72	Huber & Suhner GmbH Unterhaching	Batch no. 699714	40389	cpu	-/-	-/-
3	A, B	DC-Blocker 0.1-40 GHz	DC-Blocker 0.1-40 GHz 8141A	MEC Import: Inmet	-/-	40390	cpu	-/-	-/-
4	B	USB Wideband Power Sensor (50MHz - 18GHz)	USB Wideband Power Sensor (50MHz - 18GHz) U2021XA	Keysight Technologies Deutschland GmbH Böblingen	MY591900010	40317	cal	08.12.2025	31.12.2026
5	A, B	Switch Matrix	Switch Matrix USM	cetecom advanced GmbH Saarbrücken	C001	40340	cnn	-/-	-/-
6	A, B	RF-Cable	RF-Cable ST18/SMAM/SMAM /48	Huber & Suhner GmbH Unterhaching	Batch no. 600918	40387	cpu	-/-	-/-
7	A, B	RF-Cable	RF-Cable ST18/SMAM/SMAM /48	Huber & Suhner GmbH Unterhaching	Batch no. 127377	40388	cpu	-/-	-/-
8	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	Coax Attenuator 10 dB 2W 0-40 GHz MCL BW-K10-2W44+	Mini-Circuits Brooklyn	-/-	40391	cpu	-/-	-/-

7.5 AC conducted



Result = UR + CF + VC

(UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

Result [dBμV] = 37.62 [dBμV] + 9.90 [dB] + 0.23 [dB] = 47.75 [dBμV] (244.06 μV)

E

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	EMI Test Receiver	EMI Test Receiver ESR3 9kHz-3.6GHz	Rohde & Schwarz Messgerätebau GmbH Memmingen	102981	40332	cal	05.12.2025	31.12.2026
2	A	Two-Line V-Network (LISN)	Two-Line V-Network (LISN) ESH3-Z5	Rohde & Schwarz Messgerätebau GmbH Memmingen	892475/017	50005	cal	09.12.2025	31.12.2027
3	A	Artificial Mains Network	Artificial Mains Network ESH2-Z5	Rohde & Schwarz Messgerätebau GmbH Memmingen	892602/0024	50147	cal	11.12.2024	31.12.2026
4	A	Impedance Stabilization Network	Impedance Stabilization Network ISN ST08C	Schaffner Deutschland GmbH Karlsruhe	22583	50239	cal	20.09.2024	30.09.2026
5	A	Impedance Stabilization Network	Impedance Stabilization Network ISN T200	Schaffner Deutschland GmbH Karlsruhe	19075	50251	cpu	-/-	-/-
6	A	Impedance Stabilization Network	Impedance Stabilization Network ISN T400	Schaffner Deutschland GmbH Karlsruhe	22325	50252	cpu	-/-	-/-
7	A	Impedance Stabilization Network	Impedance Stabilization Network ISN T800	Teseq GmbH Berlin	26113	50304	cal	23.07.2024	31.07.2026
8	A	Impedance Stabilization Network	Impedance Stabilization Network ISN T8-Cat6	Teseq GmbH Berlin	26374	50305	cal	23.07.2024	31.07.2026

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.10.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.10) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.10).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.10.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.10) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.10).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.10.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.10) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.10).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.10.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.10).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 4.1 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

10 Summary of measurement results

☒	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☐	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 4	See table!	2026-06-30	-/-

Test specification clause	Test case	Guideline	Temperature & voltage conditions	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	-/-				-/-
§15.35	Duty cycle	-/-	Nominal	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	☒	☐	☐	☐	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	☒	☐	☐	☐	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	☒	☐	☐	☐	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	☒	☐	☐	☐	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance rad.	KDB 558074 DTS clause: 8.7.3	Nominal	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	☒	☐	☐	☐	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	☒	☐	☐	☐	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	☒	☐	☐	☐	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

11 Additional information and comments

Reference documents: Customer_Questionnaire_1-9318-25-01.docx
rf_ant_ant162442dt-2001a2_summary_en.pdf

Co-applicable documents: 1-9318-25-02-03_TR1-A201-R01.pdf

Special test descriptions: Power settings:

Channel	1 / 6 / 11
DSSS / b – mode	Default
OFDM / g – mode	Default
OFDM / n HT20 – mode	Default
OFDM / ax HE20 – mode	Default
OFDM / ax HE20 – mode ER	Default

Configuration descriptions: The DUT has been controlled using a web GUI and batch files. Only 20 MHz bandwidth is supported.

EUT selection:

☐ Only one device available

☒ Devices selected by the customer

☐ Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Note: The channels used for the tests are marked in bold in the list.

12 Additional EUT parameter

- Test mode:
- ☐ No test mode available
lperf was used to ping another device with the largest support packet size
- ☒ Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself
- Modulation types:
- ☒ Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
- ☐ Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- ☒ Operating mode 1 (single antenna)
- *Equipment with 1 antenna,*
 - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
 - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
- ☐ Operating mode 2 (multiple antennas, no beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
- ☐ Operating mode 3 (multiple antennas, with beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

13 Measurement results

13.1 Antenna gain

Limits:

FCC	ISED
6 dBi / > 6 dBi output power and power density reduction required	

Results: Extracted from antenna datasheet

	lowest channel	middle channel	highest channel
Gain [dBi] / Declared	2.1	2.1	2.1

13.2 Identify worst case data rate

Description:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace mode	Max hold
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Results:

Modulation scheme / bandwidth	
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / ax HE20 – mode	MCS0
OFDM / ax HE20 – mode ER	MCS0

13.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
According to DTS clause: 8.3.1.3	
Peak power meter	
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup B
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

Results:

	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	13.7	13.1	13.5
Output power conducted OFDM / g – mode	20.0	21.7	20.5
Output power conducted OFDM / n HT20 – mode	19.8	21.5	20.3
Output power conducted OFDM / ax HE20 – mode	21.4	23.1	22.3
Output power conducted OFDM / ax HE20 – mode ER	19.5	20.7	17.8

13.4 Duty cycle

Description:

Measurement of the timing behavior.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
No limitation	

Results:

T_{nom}	V_{nom}	lowest channel	middle channel	highest channel
DSSS / b – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / g – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / n HT20 – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / ax HE20 – mode		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
OFDM / ax HE20 – mode ER		100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB

13.5 Peak power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency.

Measurement:

Measurement parameter	
According to DTS clause: 8.4	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
8 dBm / 3 kHz (conducted)	

Results:

measured	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-11.2	-11.7	-11.3
OFDM / g – mode	-12.3	-14.1	-13.3
OFDM / n HT20 – mode	-13.7	-15.4	-13.3
OFDM / ax HE20 – mode Full RU	-13.5	-14.1	-13.8
OFDM / ax HE20 – mode ER	-14.2	-13.2	-14.8
OFDM / ax HE20 – mode 26 RU-0	-14.7		
OFDM / ax HE20 – mode 26 RU-4		-14.1	
OFDM / ax HE20 – mode 26 RU-8			-15.5
OFDM / ax HE20 – mode 52 RU-37	-14.1		
OFDM / ax HE20 – mode 52 RU-40			-14.7
OFDM / ax HE20 – mode 106 RU-53	-13.8		
OFDM / ax HE20 – mode 106 RU-54			-14.2

NOTE: Partial PSD testing was performed with different RU configurations in order to show, that full RU configuration is the worst case configuration for testing.

13.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.2	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	7536	7548	7532
OFDM / g – mode	15144	15164	15152
OFDM / n HT20 – mode	15616	16432	15156
OFDM / ax HE20 – mode	18140	18816	18804
OFDM / ax HE20 – mode ER	16868	16728	16516

13.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Usage:

-/-	ISED
OBW is necessary for Emission Designator	

Results:

	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	12571	12595	12611
OFDM / g – mode	16702	16846	16730
OFDM / n HT20 – mode	17542	17666	17566
OFDM / ax HE20 – mode	18854	18954	18882
OFDM / ax HE20 – mode ER	17438	17606	17550

13.8 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Usage:

-/-	ISED
The complete bandwidth has to be within the frequency range of the band.	

Results:

	20 dB bandwidth / MHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	14.4	14.4	14.4
OFDM / g – mode	19.9	19.3	19.8
OFDM / n HT20 – mode	19.8	20.1	20.0
OFDM / ax HE20 – mode	20.4	20.6	20.4
OFDM / ax HE20 – mode ER	19.3	19.4	19.3

13.9 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3 meter.

Measurement:

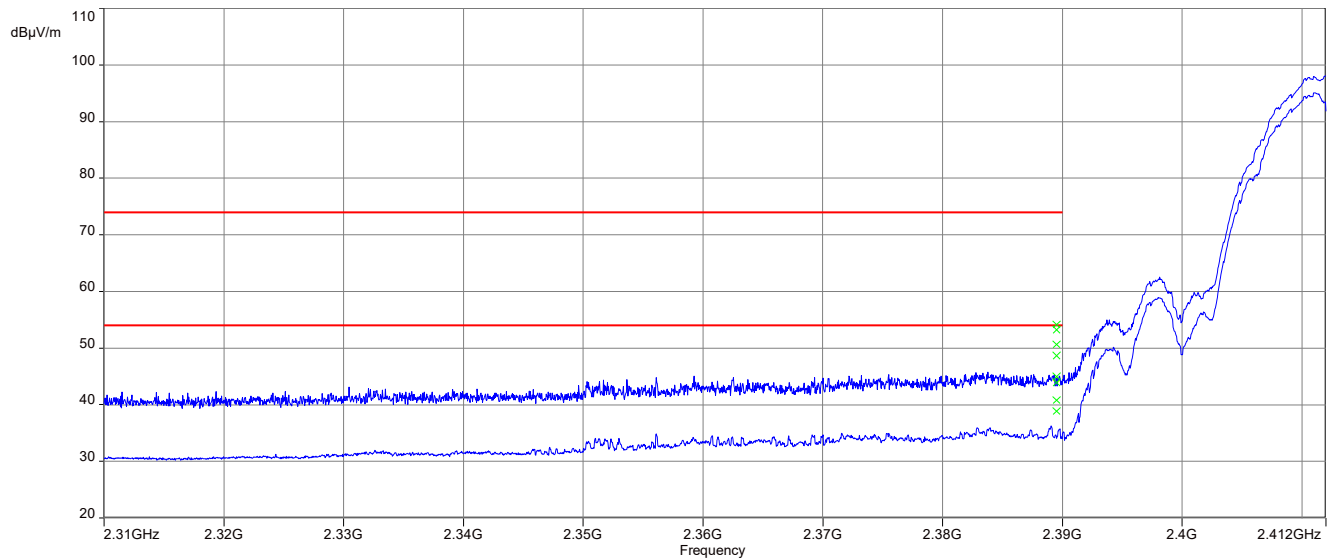
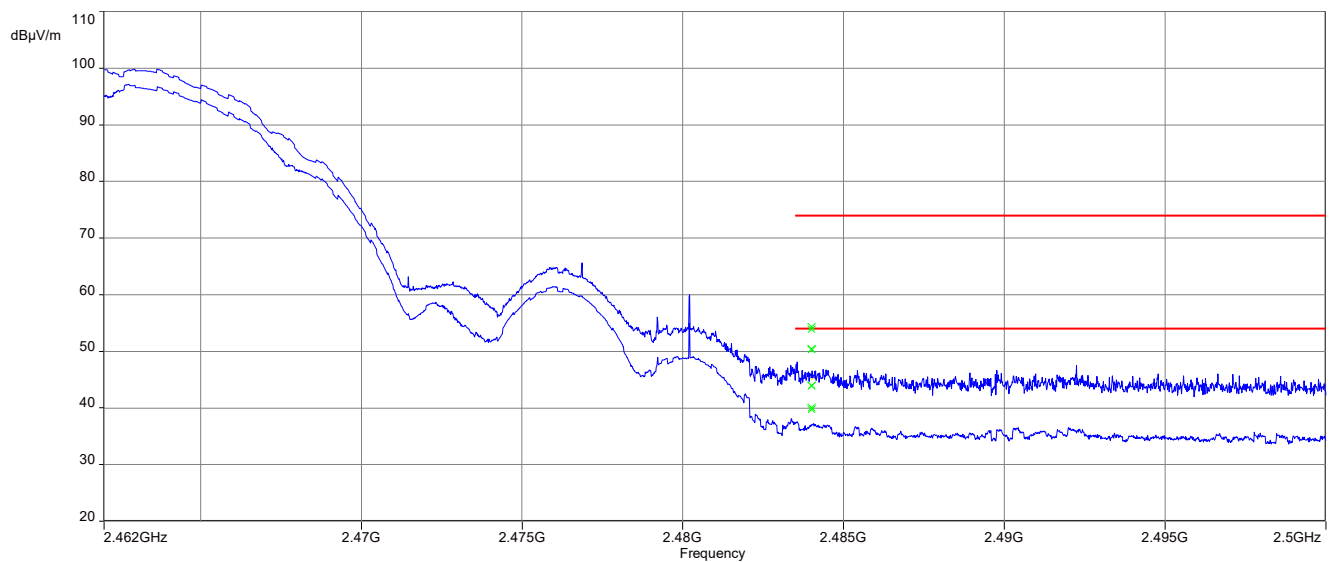
	Measurement parameter for peak measurements	Measurement parameter for average measurements
		According to DTS clause: 8.7.3
Detector	Peak	RMS
Sweep time	Auto	Auto
Resolution bandwidth	1 MHz	100 kHz
Video bandwidth	3 MHz	300 kHz
Span	See plot	2 MHz
Trace mode	Max. hold	RMS Average over 101 sweeps
Analyzer function	-/-	Band power function (Compute the power by integrating the spectrum over 1 MHz)
Test setup	See chapter 7.2 setup A	
Measurement uncertainty	See chapter 9	

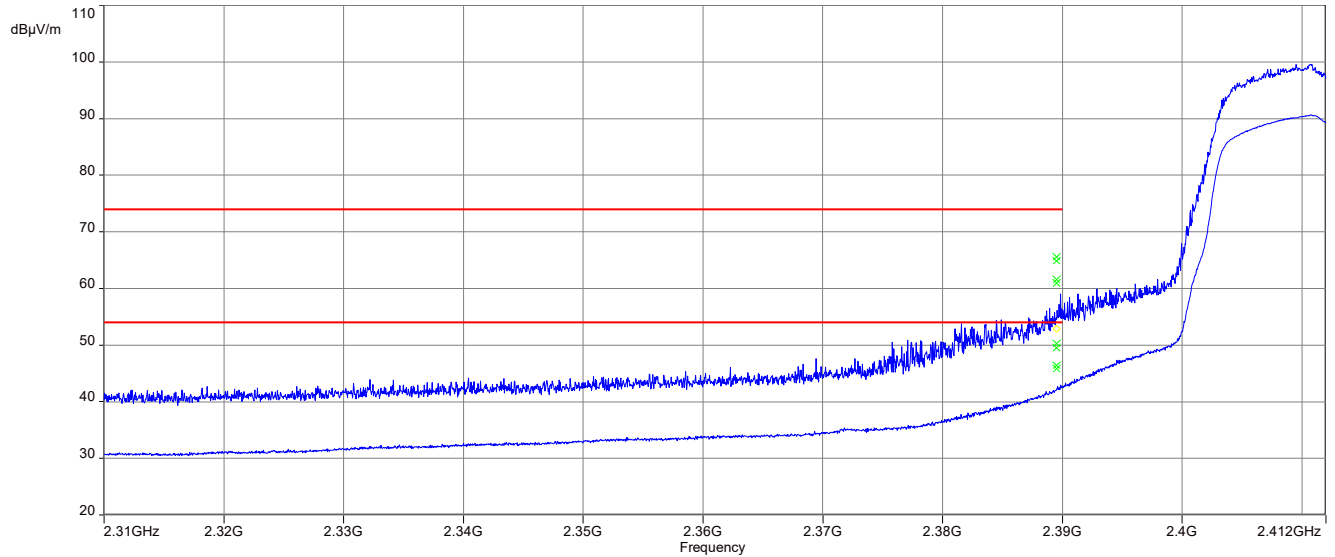
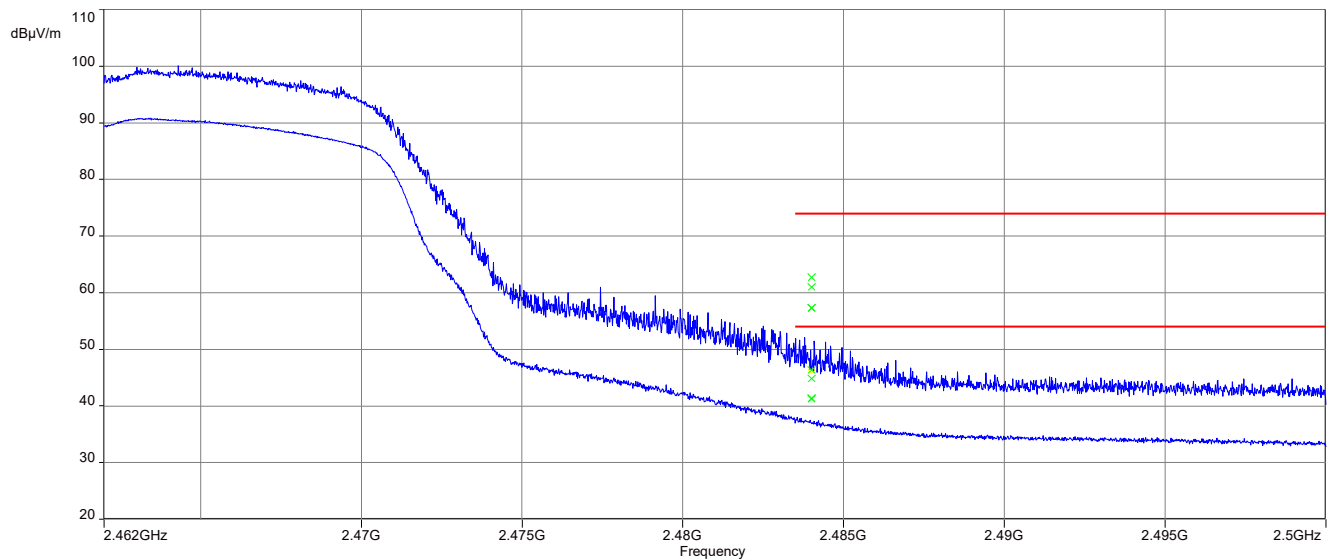
Limits:

FCC	ISED
74 dB μ V/m @ 3 m (Peak) 54 dB μ V/m @ 3 m (AVG)	

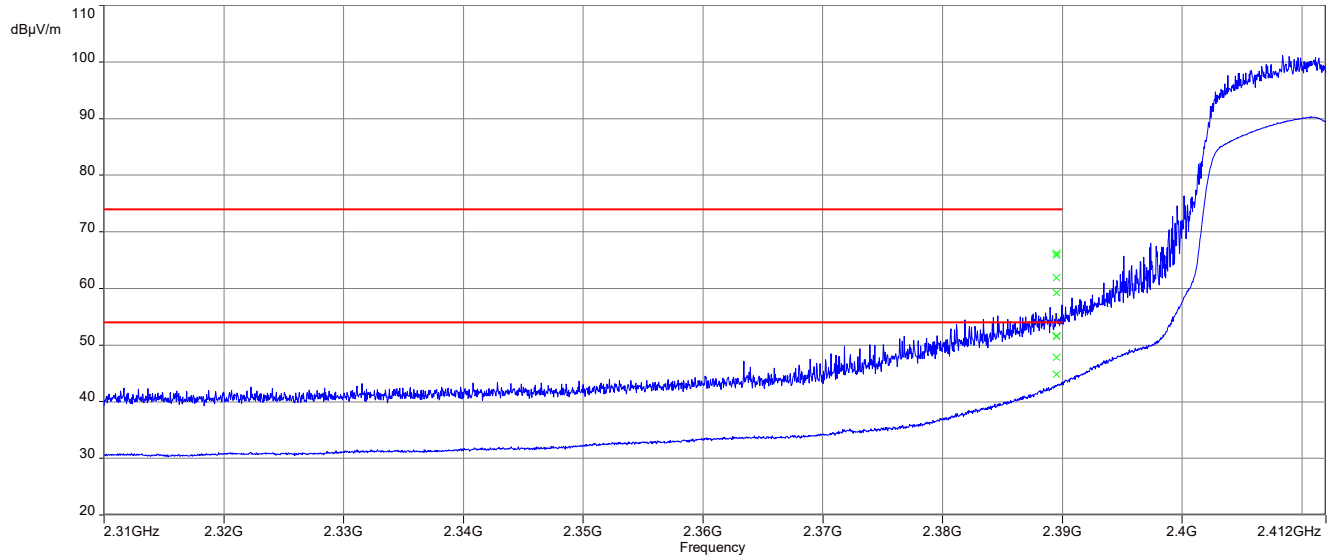
Results:

Scenario	Band Edge Compliance Radiated [dB μ V/m]
b-mode Channel 1	54.2 dB μ V/m (peak) 45.0 dB μ V/m (average)
b-mode Channel 11	54.4 dB μ V/m (peak) 44.0 dB μ V/m (average)
nHT20-mode Channel 1	65.6 dB μ V/m (peak) 50.3 dB μ V/m (average)
nHT20-mode Channel 11	62.7 dB μ V/m (peak) 46.4 dB μ V/m (average)
axHE20-mode Channel 1	66.2 dB μ V/m (peak) 51.6 dB μ V/m (average)
axHE20-mode Channel 11	66.9 dB μ V/m (peak) 49.1 dB μ V/m (average)
axHE20-mode Channel 1 ER	55.8 dB μ V/m (peak) 41.9 dB μ V/m (average)
axHE20-mode Channel 11 ER	54.9 dB μ V/m (peak) 42.7 dB μ V/m (average)
axHE20-mode Channel 1 RU0	47.2 dB μ V/m (peak) 35.6 dB μ V/m (average)
axHE20-mode Channel 11 RU8	47.8 dB μ V/m (peak) 34.8 dB μ V/m (average)
axHE20-mode Channel 1 RU37	51.7 dB μ V/m (peak) 38.8 dB μ V/m (average)
axHE20-mode Channel 11 RU40	51.9 dB μ V/m (peak) 39.3 dB μ V/m (average)
axHE20-mode Channel 1 RU53	55.0 dB μ V/m (peak) 41.6 dB μ V/m (average)
axHE20-mode Channel 11 RU54	56.6 dB μ V/m (peak) 43.5 dB μ V/m (average)

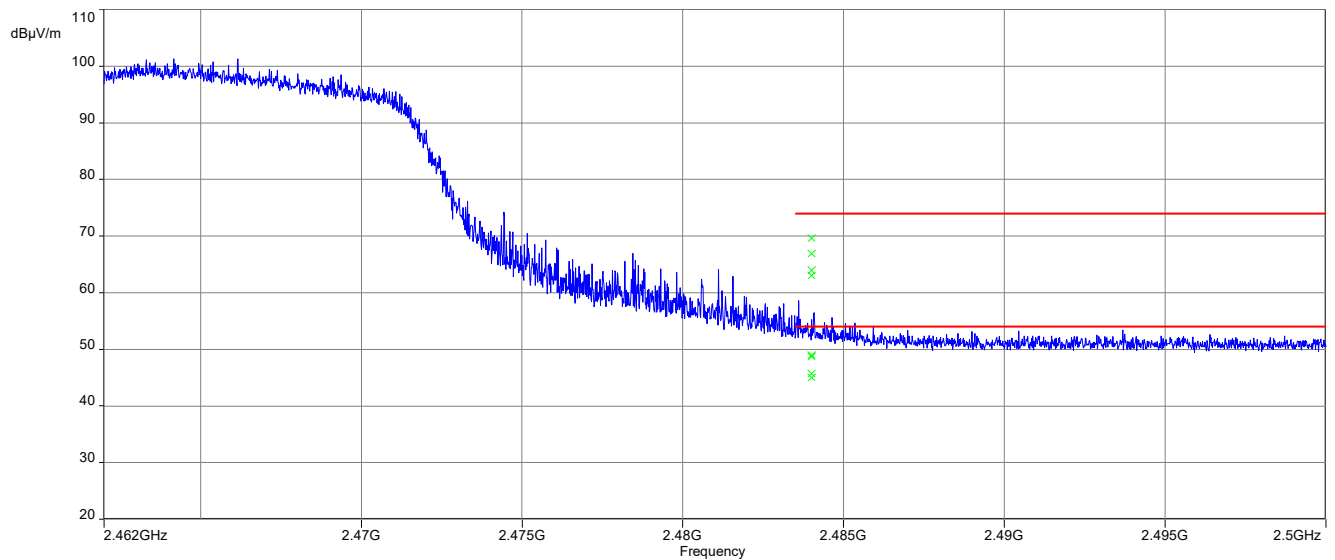
Plots:**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization, b-mode**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization, b-mode

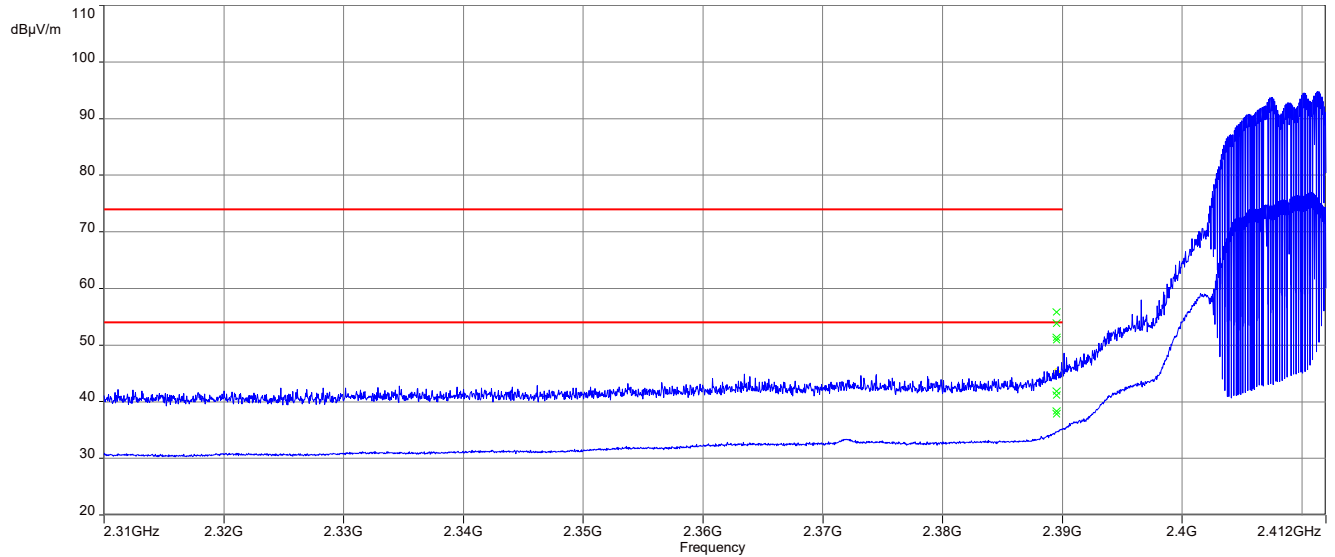
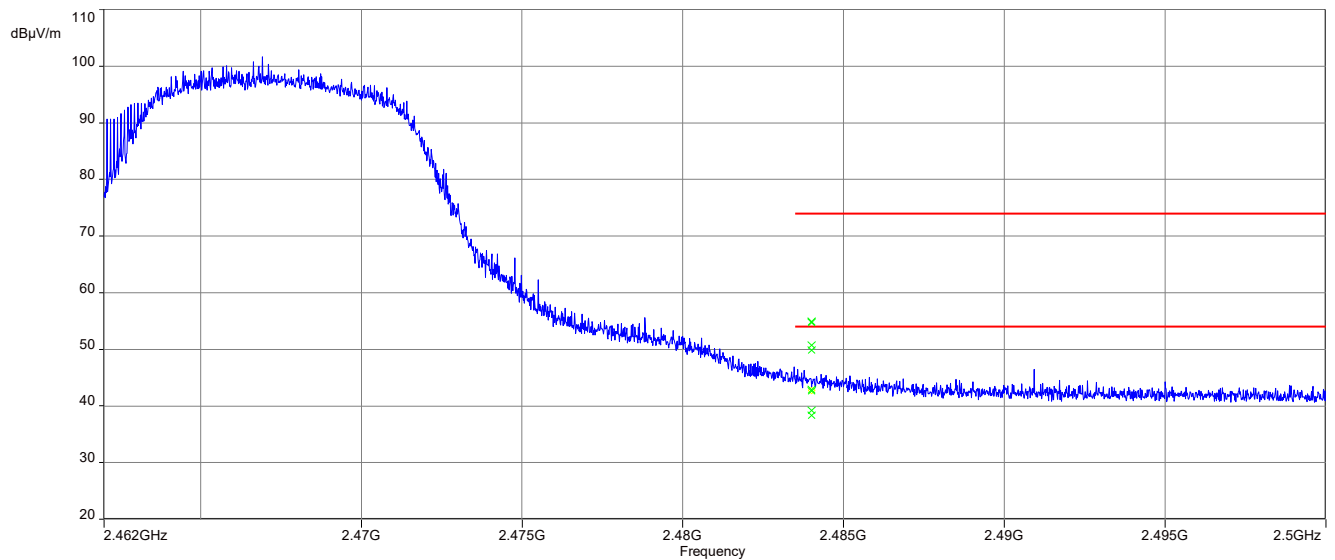
Plot 3: TX mode, lower band edge, vertical & horizontal polarization, nHT20-mode**Plot 4:** TX mode, upper band edge, vertical & horizontal polarization, nHT20-mode

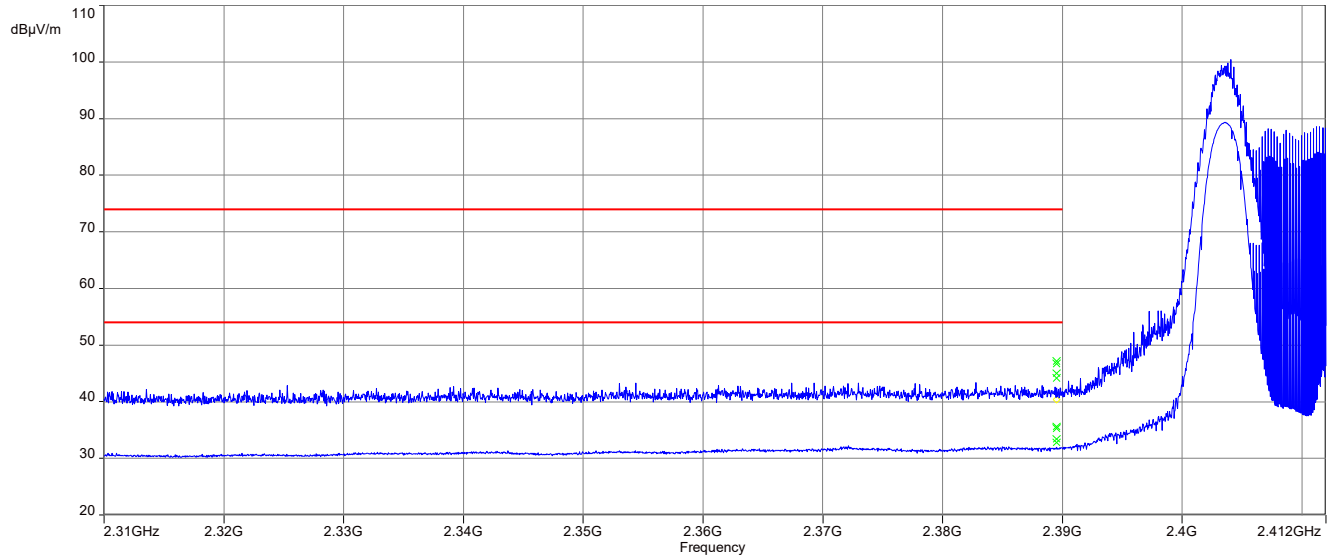
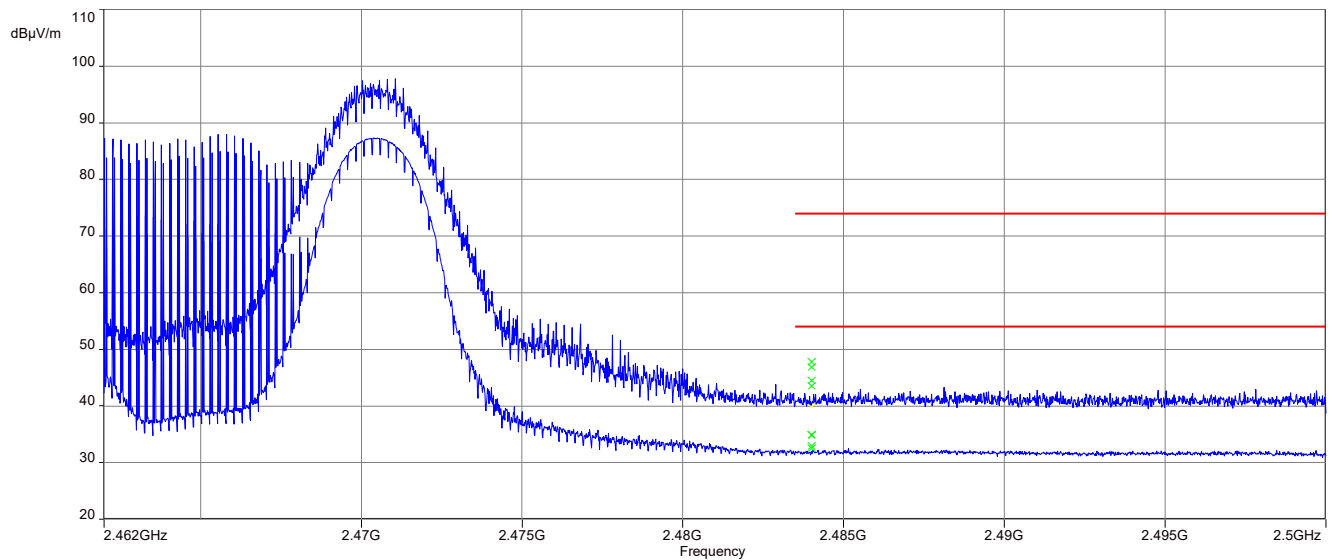
Plot 5: TX mode, lower band edge, vertical & horizontal polarization, axHE20-mode

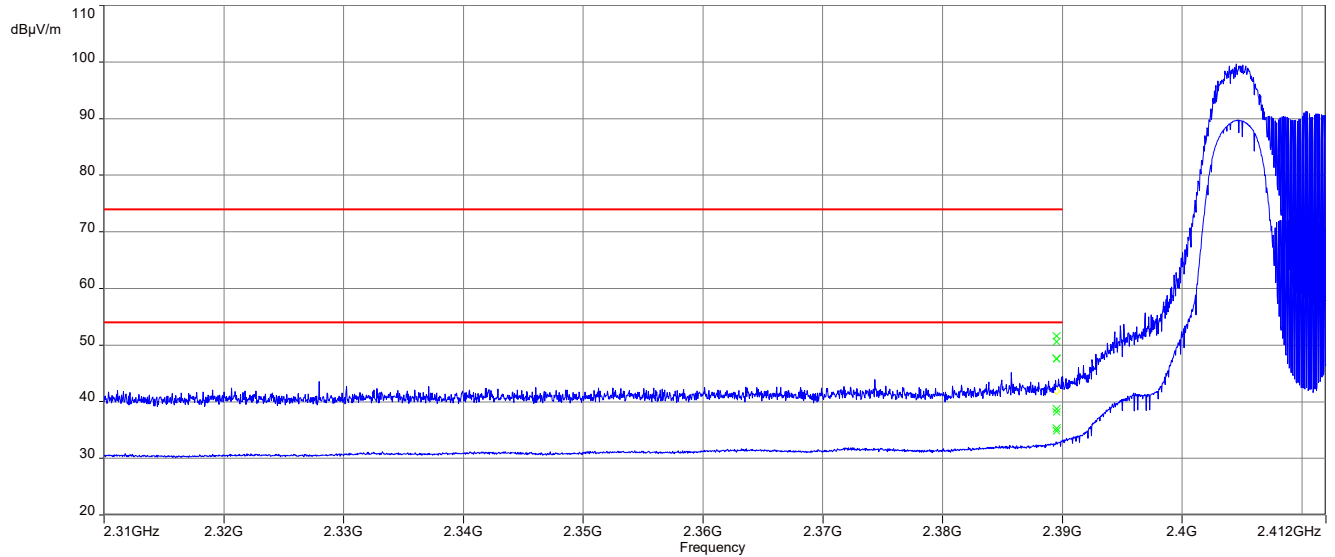
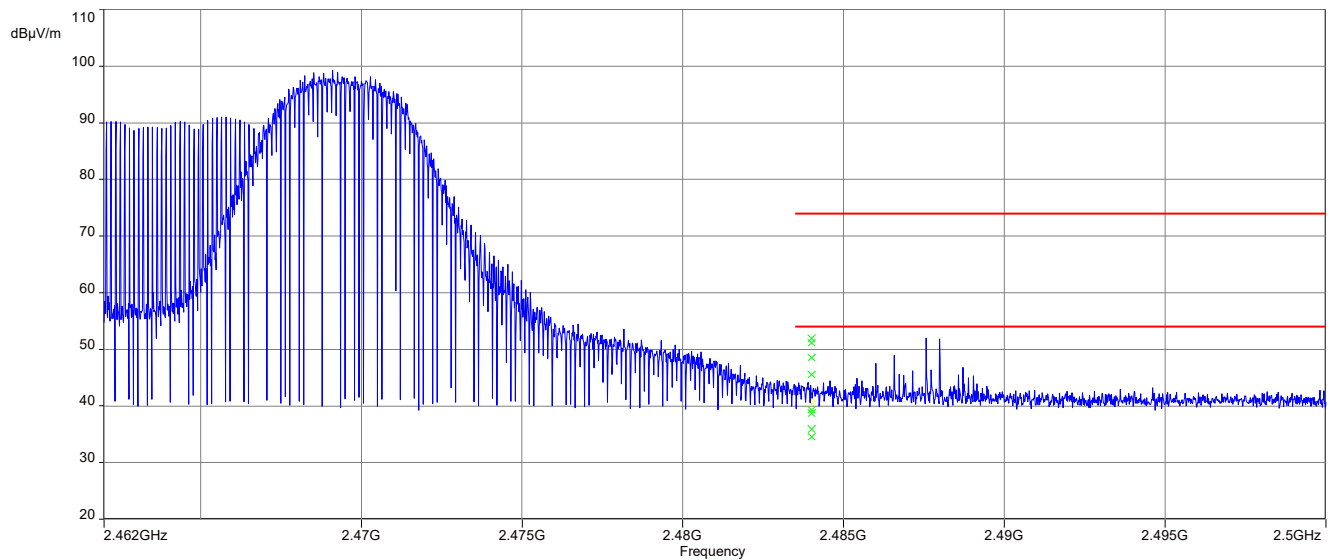


Plot 6: TX mode, upper band edge, vertical & horizontal polarization, axHE20-mode

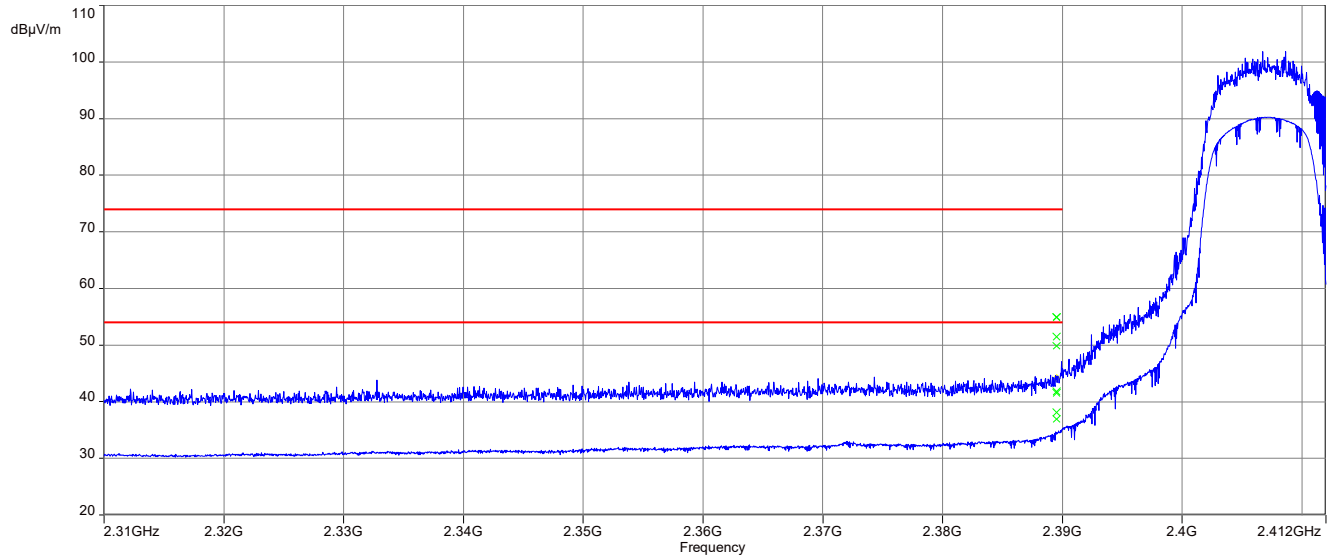


Plot 7: TX mode, lower band edge, vertical & horizontal polarization, axHE20-mode ER**Plot 8:** TX mode, upper band edge, vertical & horizontal polarization, axHE20-mode ER

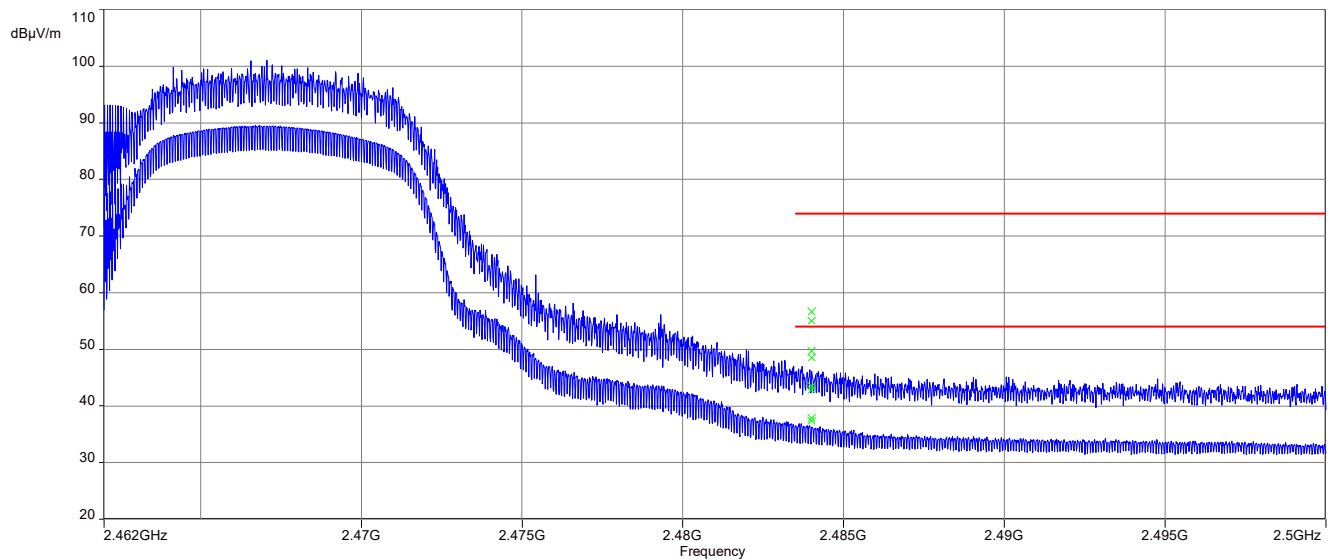
Plot 9: TX mode, lower band edge, vertical & horizontal polarization, axHE20-mode RU0**Plot 10:** TX mode, upper band edge, vertical & horizontal polarization, axHE20-mode RU8

Plot 11: TX mode, lower band edge, vertical & horizontal polarization, axHE20-mode RU37**Plot 12:** TX mode, upper band edge, vertical & horizontal polarization, axHE20-mode RU40

Plot 13: TX mode, lower band edge, vertical & horizontal polarization, axHE20-mode RU53



Plot 14: TX mode, upper band edge, vertical & horizontal polarization, axHE20-mode RU54



13.10 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
External result file(s)	1-9318-25-02-03_TR1-A201-R01.pdf
Test setup	See chapter 7.4 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC	ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: Compliant (See external result file)

13.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Test setup	See chapter 7.2 setup B
Measurement uncertainty	See chapter 9

Limits:

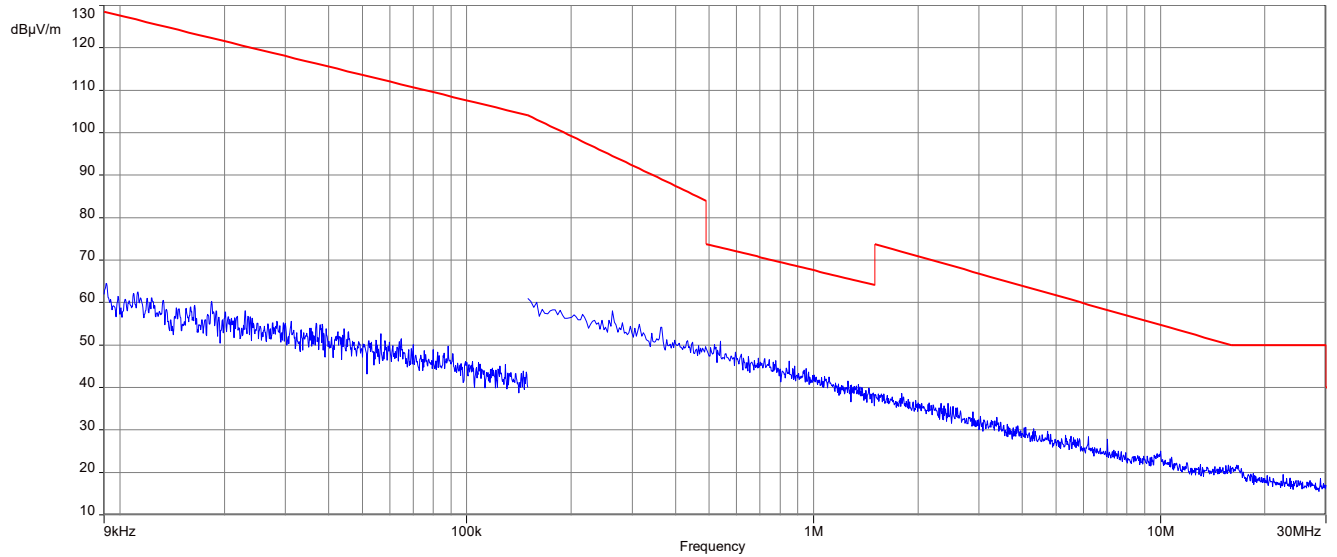
FCC		ISED
Frequency / MHz	Field Strength / ($\mu\text{V} / \text{m}$)	Measurement distance / m
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Results:

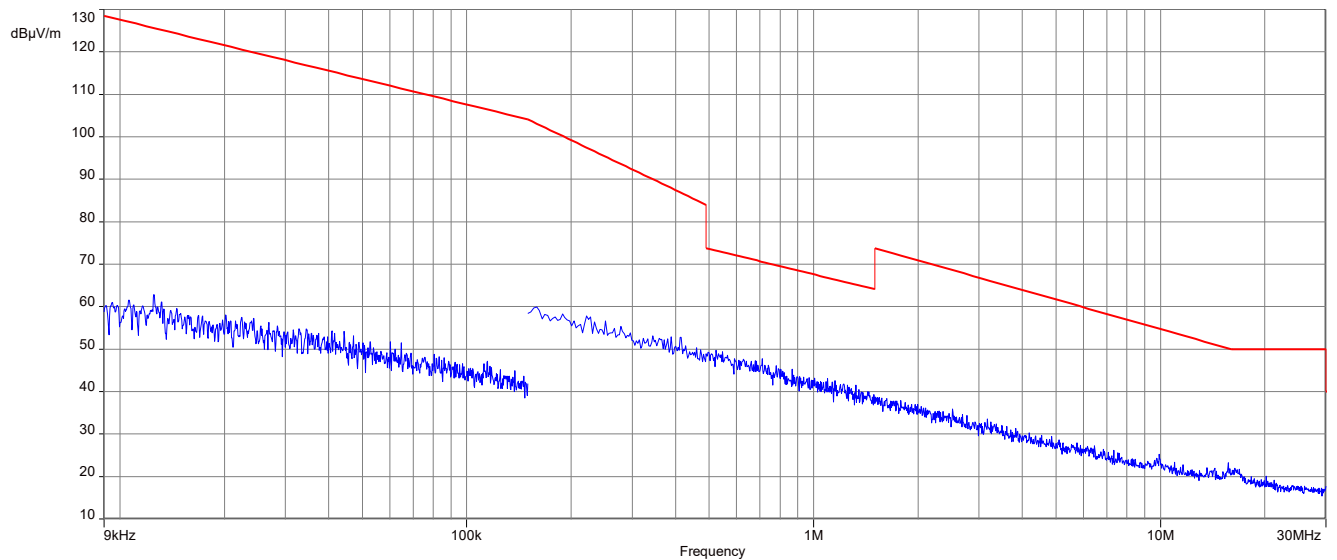
TX spurious emissions radiated < 30 MHz / (dB $\mu\text{V} / \text{m}$) @ 3 m		
Frequency / MHz	Detector	Level / (dB $\mu\text{V} / \text{m}$)
All detected peaks are more than 20 dB below the limit.		

Plots: DSSS

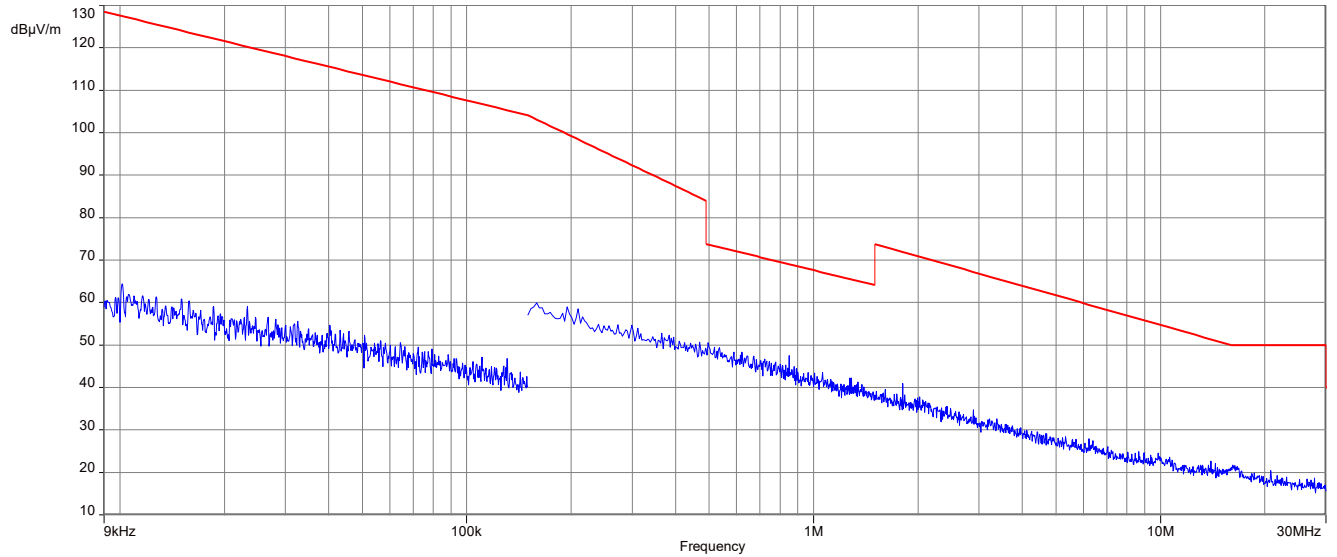
Plot 1: 9 kHz to 30 MHz, lowest channel

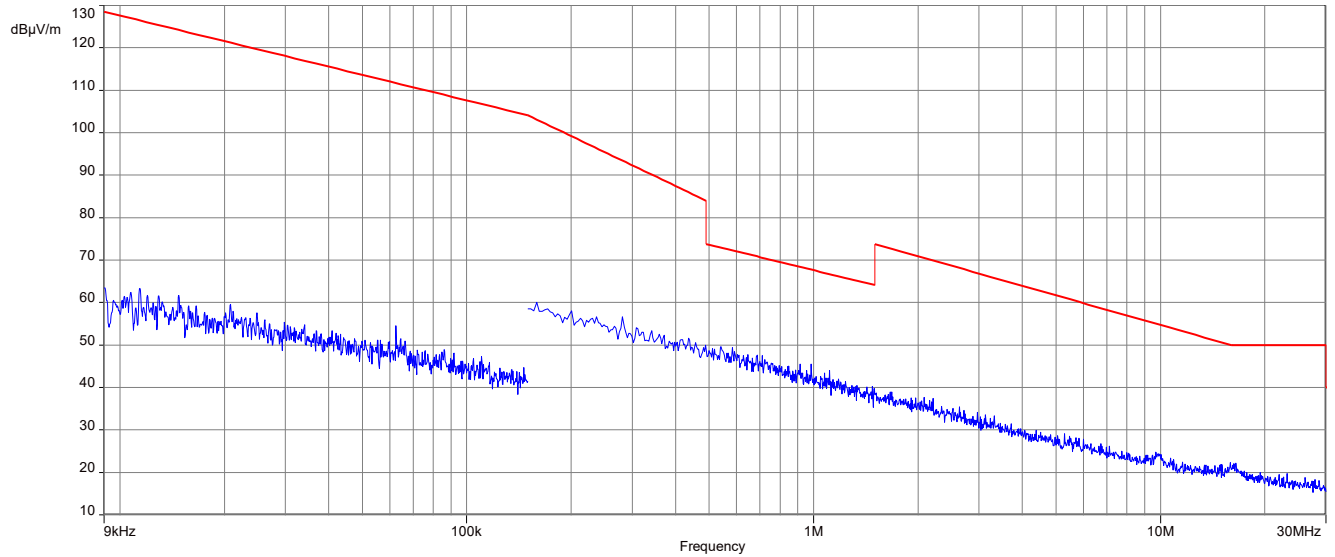
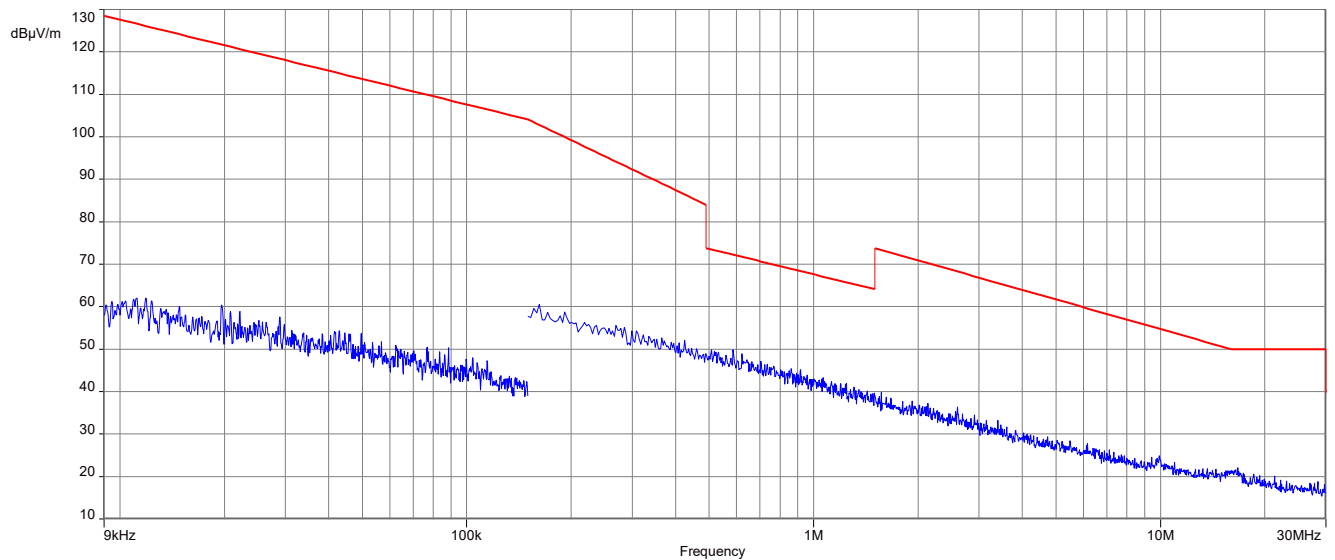


Plot 2: 9 kHz to 30 MHz, middle channel

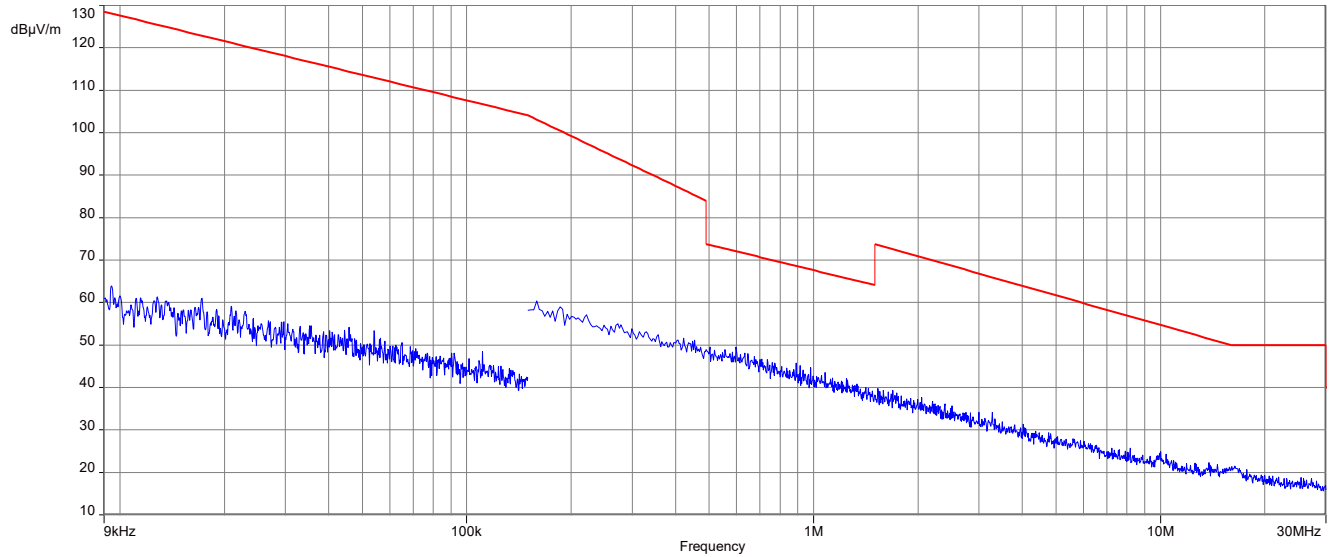


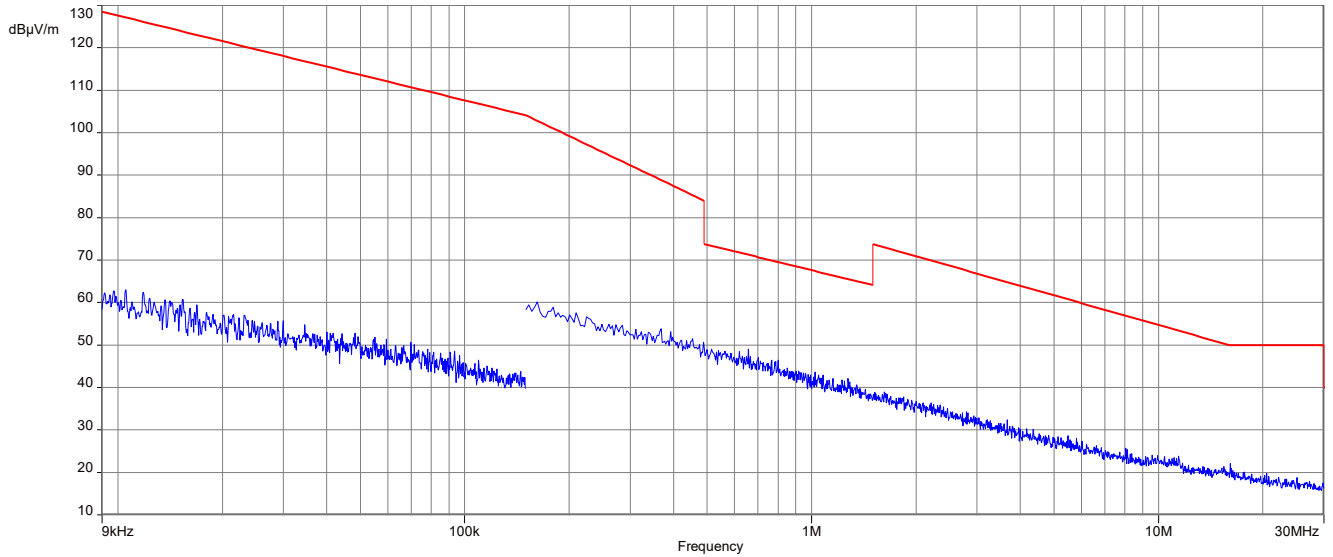
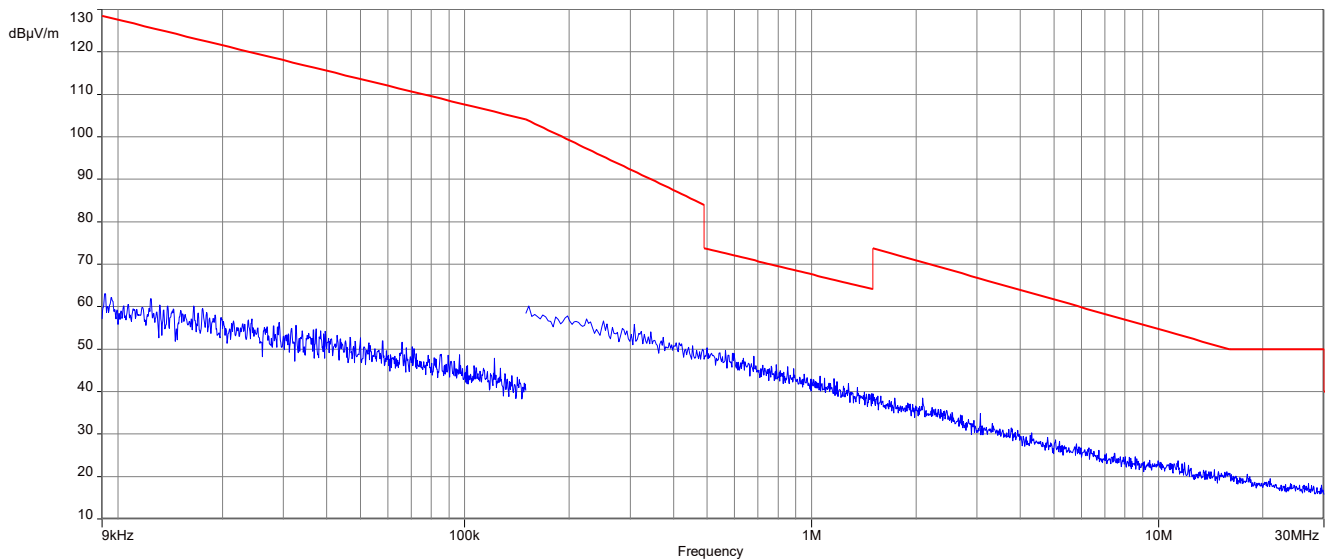
Plot 3: 9 kHz to 30 MHz, highest channel



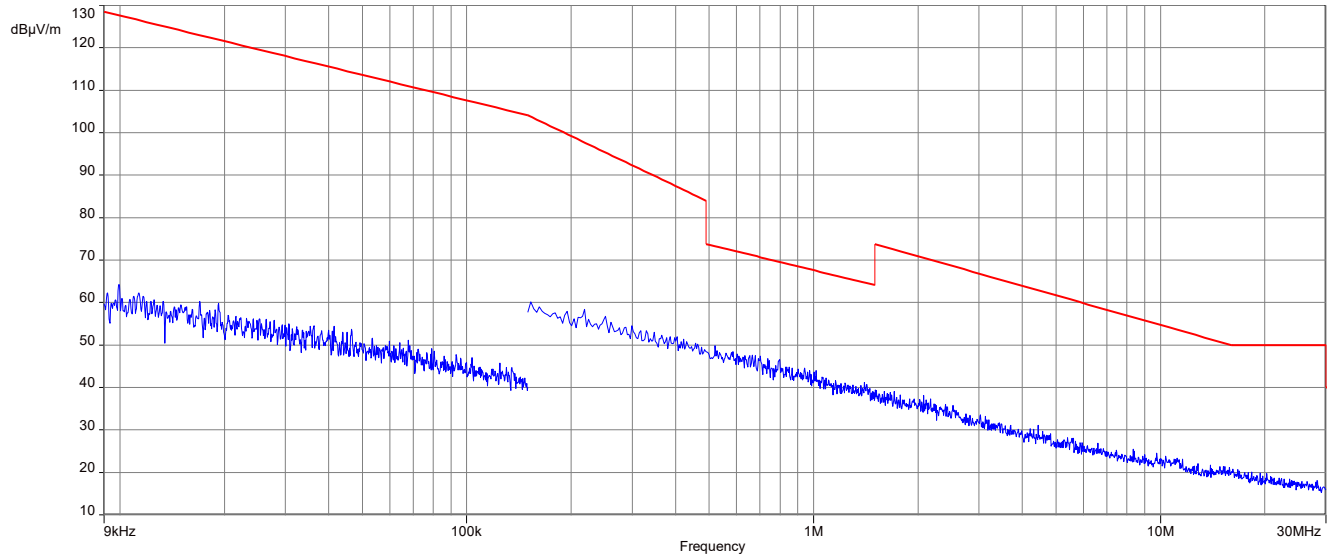
Plots: OFDM (20 MHz nominal channel bandwidth)**Plot 1:** 9 kHz to 30 MHz, lowest channel**Plot 2:** 9 kHz to 30 MHz, middle channel

Plot 3: 9 kHz to 30 MHz, highest channel



Plots: OFDMA (20 MHz bandwidth)**Plot 1:** 9 kHz to 30 MHz, lowest channel**Plot 2:** 9 kHz to 30 MHz, middle channel

Plot 3: 9 kHz to 30 MHz, highest channel



13.12 Spurious emissions radiated 30 MHz to 1 GHz

Measurement:

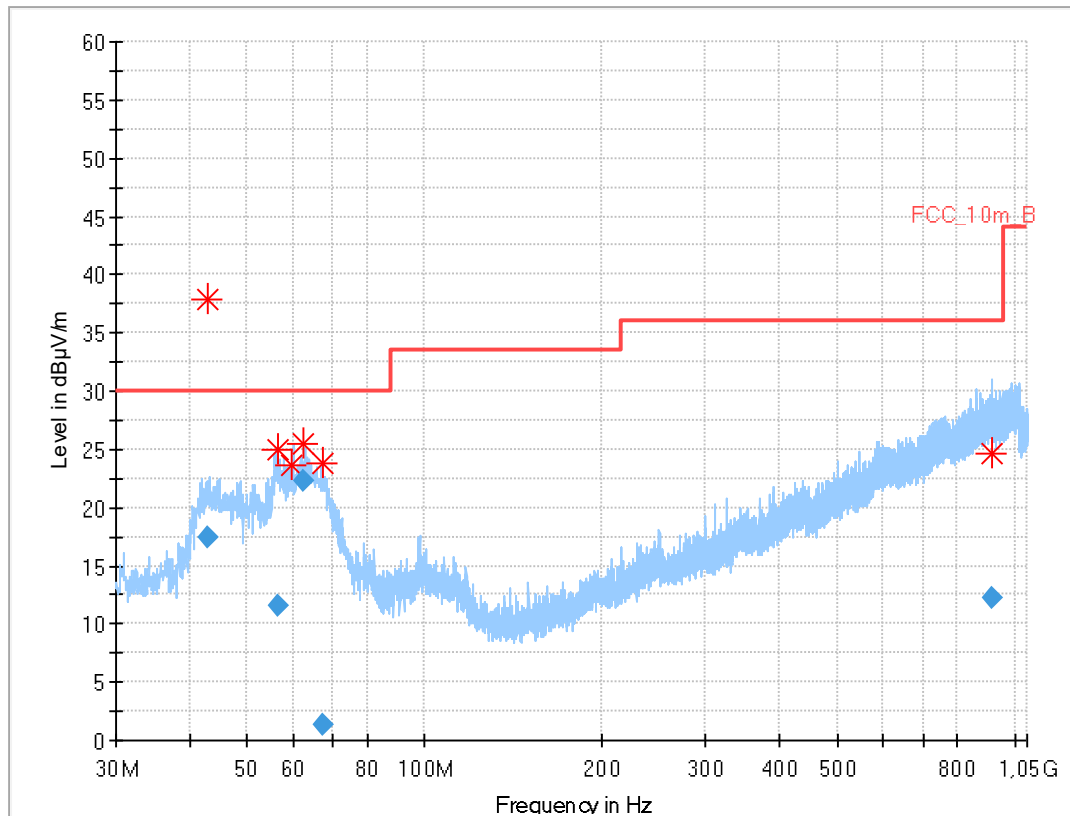
Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Test setup	See chapter 7.1 setup A
Measurement uncertainty	See chapter 9

Limits:

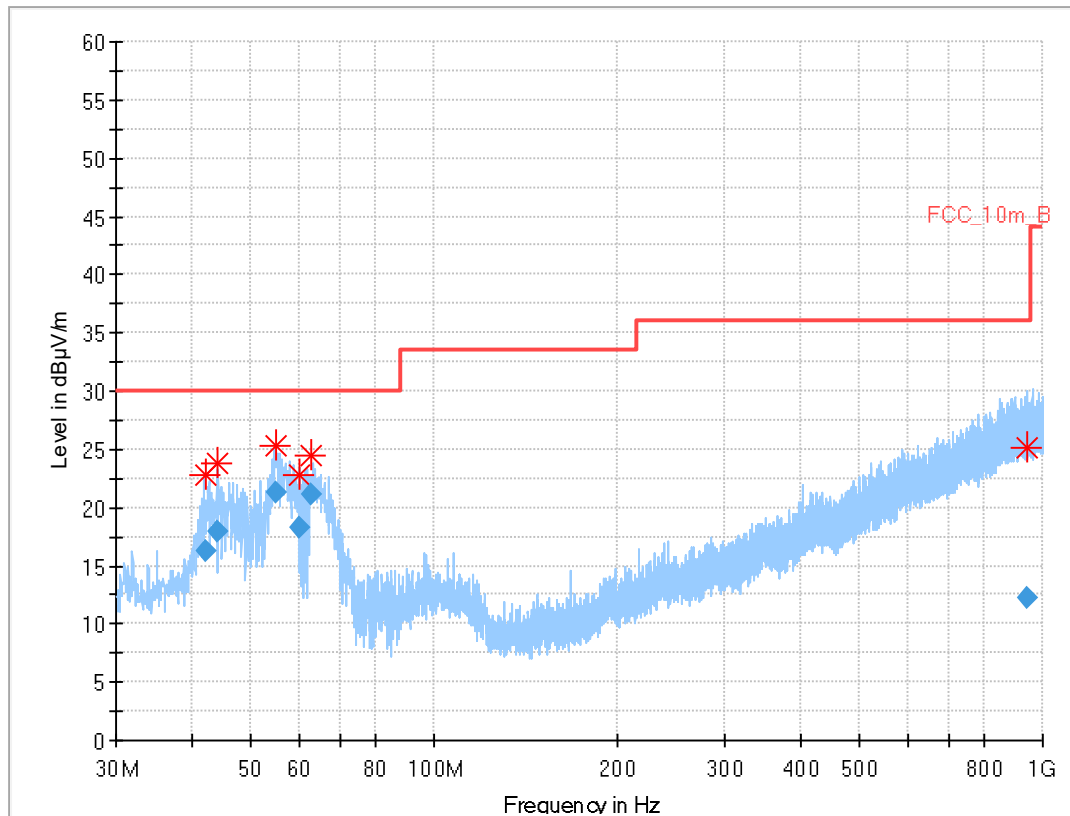
FCC		ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

Plot:

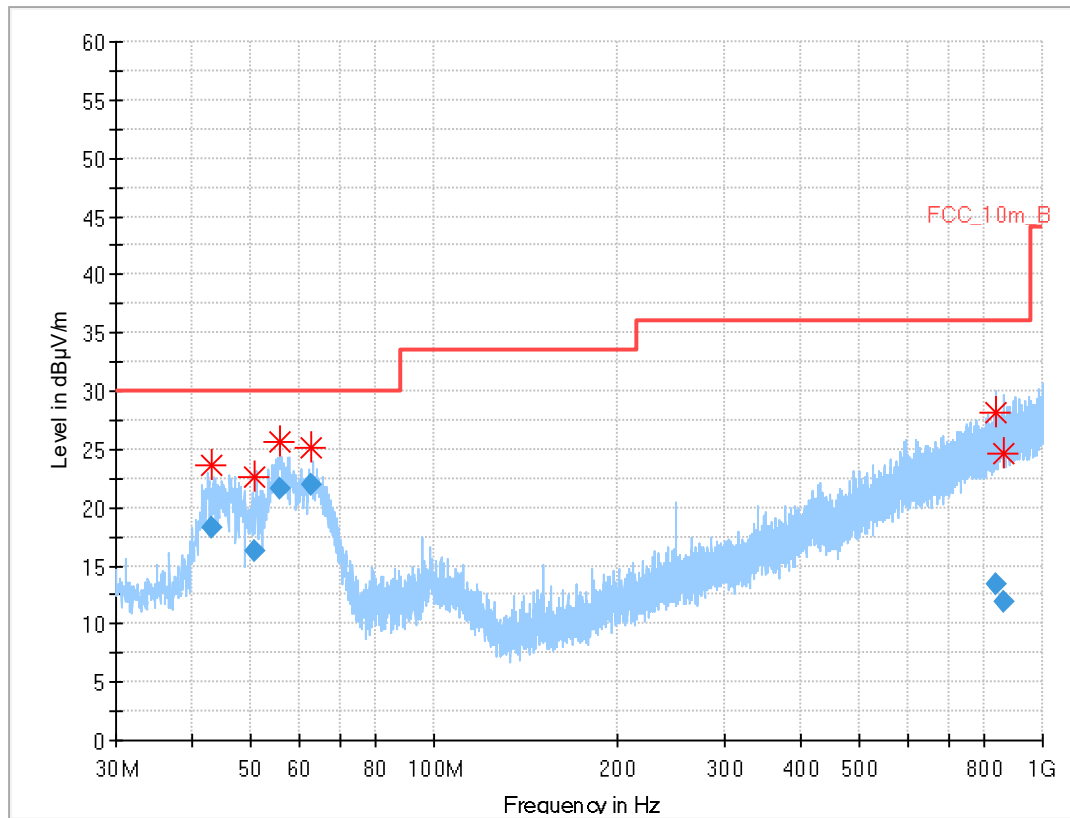
Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, b-mode, valid for all channels

**Final results:**

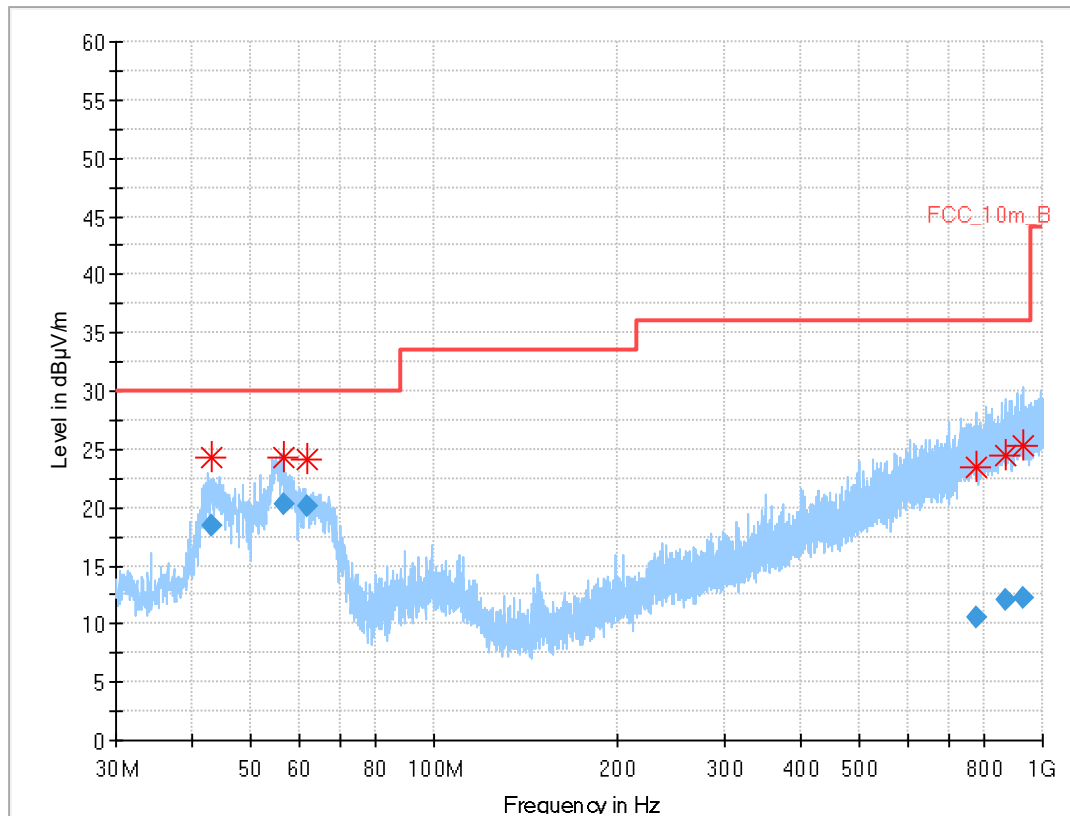
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.983400	17.45	30.00	12.55	1000.0	120.000	369.0	V	322.0	14.0
56.278440	11.64	30.00	18.36	1000.0	120.000	157.0	V	9.0	15.3
59.532360	-1.06	30.00	31.06	1000.0	120.000	100.0	V	10.0	13.9
62.432040	22.25	30.00	7.75	1000.0	120.000	257.0	V	199.0	12.4
67.148400	1.35	30.00	28.65	1000.0	120.000	284.0	V	253.0	10.9
916.728600	12.30	36.00	23.70	1000.0	120.000	200.0	V	323.0	24.8

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, g-mode, valid for all channels**Final results:**

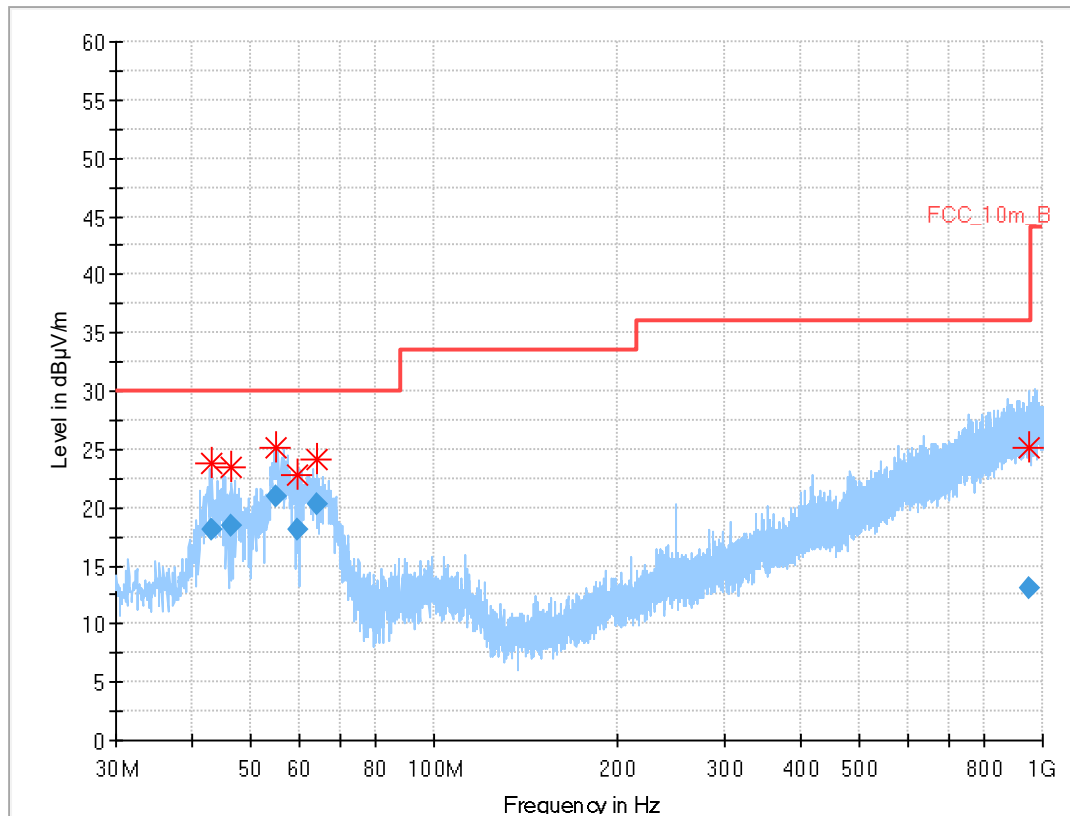
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.181260	16.33	30.00	13.67	1000.0	120.000	98.0	V	100.0	13.9
44.195600	17.97	30.00	12.03	1000.0	120.000	170.0	V	190.0	14.2
54.981400	21.31	30.00	8.69	1000.0	120.000	98.0	V	100.0	14.7
60.125700	18.24	30.00	11.76	1000.0	120.000	124.0	V	190.0	13.7
62.535920	21.14	30.00	8.86	1000.0	120.000	98.0	V	179.0	12.4
945.417800	12.15	36.00	23.85	1000.0	120.000	170.0	H	80.0	24.8

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, nHT20-mode, valid for all channels**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.917740	18.25	30.00	11.75	1000.0	120.000	127.0	V	190.0	14.0
50.819480	16.32	30.00	13.68	1000.0	120.000	165.0	V	100.0	14.5
55.767280	21.64	30.00	8.36	1000.0	120.000	106.0	V	100.0	15.2
62.609380	21.88	30.00	8.12	1000.0	120.000	98.0	V	266.0	12.4
840.291700	13.45	36.00	22.55	1000.0	120.000	170.0	V	81.0	23.9
862.126280	11.97	36.00	24.03	1000.0	120.000	170.0	V	280.0	24.2

Plot 4: 30 MHz to 1 GHz, vertical & horizontal polarization, axHE20-mode, valid for all channels**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.997080	18.47	30.00	11.53	1000.0	120.000	170.0	V	190.0	14.0
56.565320	20.21	30.00	9.79	1000.0	120.000	102.0	V	280.0	15.2
61.636140	20.05	30.00	9.95	1000.0	120.000	98.0	V	10.0	12.7
779.977300	10.59	36.00	25.41	1000.0	120.000	170.0	V	173.0	23.1
870.169240	12.01	36.00	23.99	1000.0	120.000	170.0	H	172.0	24.3
930.986760	12.28	36.00	23.72	1000.0	120.000	170.0	H	10.0	24.8

Plot 5: 30 MHz to 1 GHz, vertical & horizontal polarization, axHE20-mode ER, valid for all channels**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.146260	18.18	30.00	11.82	1000.0	120.000	170.0	V	280.0	14.0
46.404760	18.49	30.00	11.51	1000.0	120.000	170.0	V	280.0	14.3
54.909720	20.93	30.00	9.07	1000.0	120.000	101.0	V	265.0	14.6
59.619920	18.18	30.00	11.82	1000.0	120.000	164.0	V	2.0	13.9
63.936840	20.31	30.00	9.69	1000.0	120.000	103.0	V	-10.0	11.9
949.970920	13.11	36.00	22.89	1000.0	120.000	148.0	H	280.0	24.8

13.13 Spurious emissions radiated above 1 GHz

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Test setup	See chapter 7.2 setup C & 7.3 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC		ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

Results: b-mode

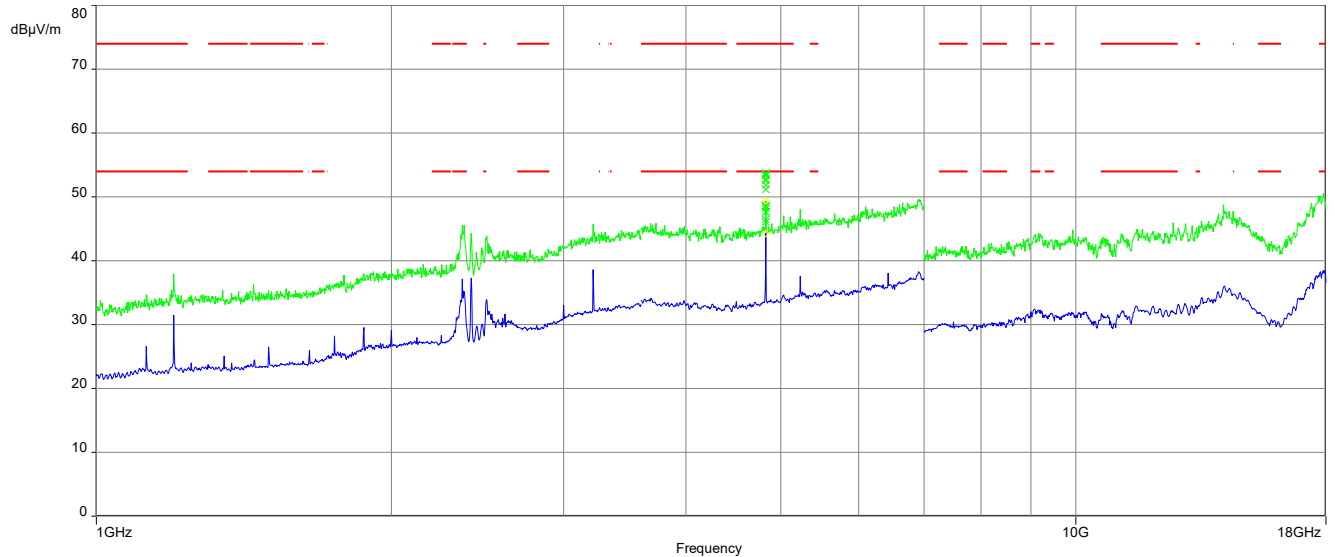
TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
4824	Peak	53.7	4874	Peak	52.8	4924	Peak	52.2
	AVG	48.6		AVG	46.4		AVG	46.4

Results: g-mode

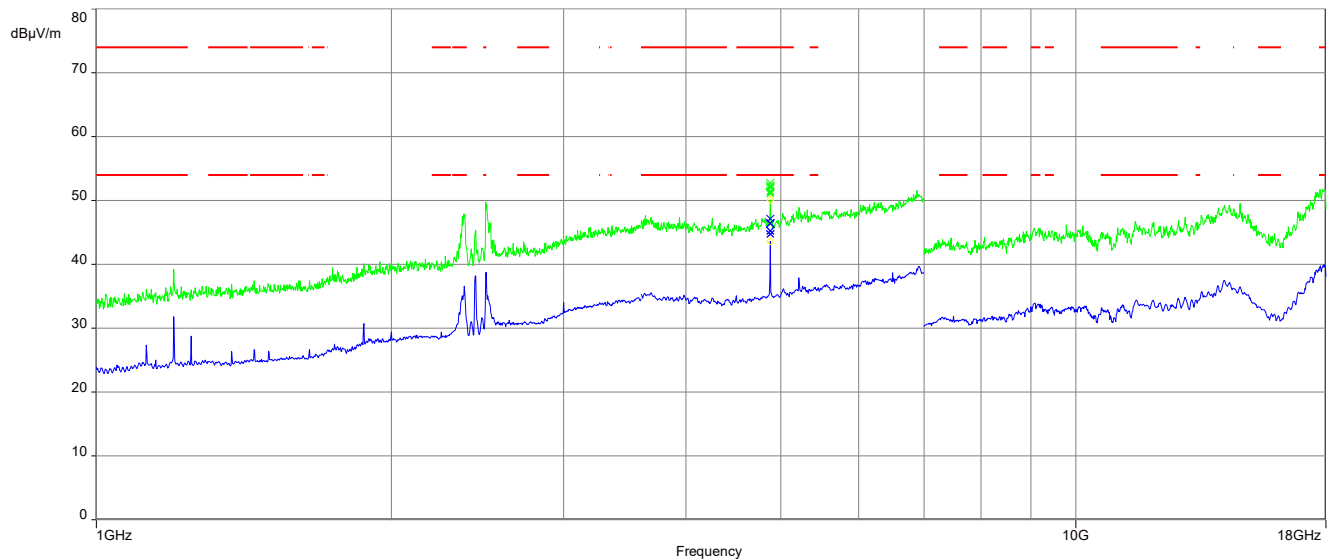
TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		

Results: axHE20-mode

TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		

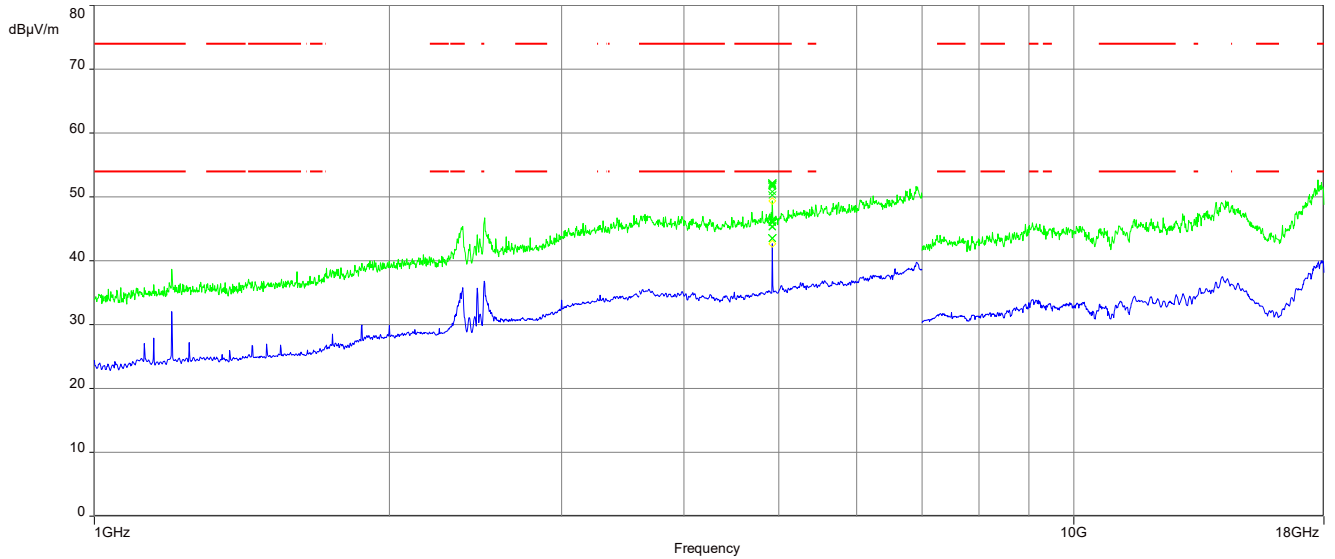
Plots: b-mode**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

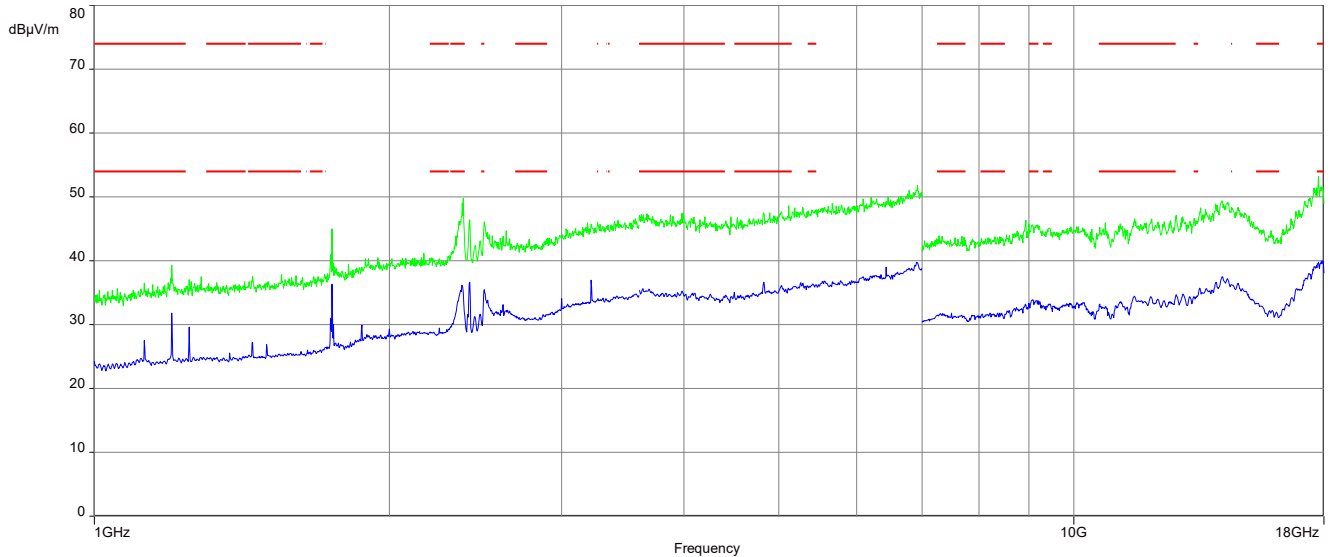
Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

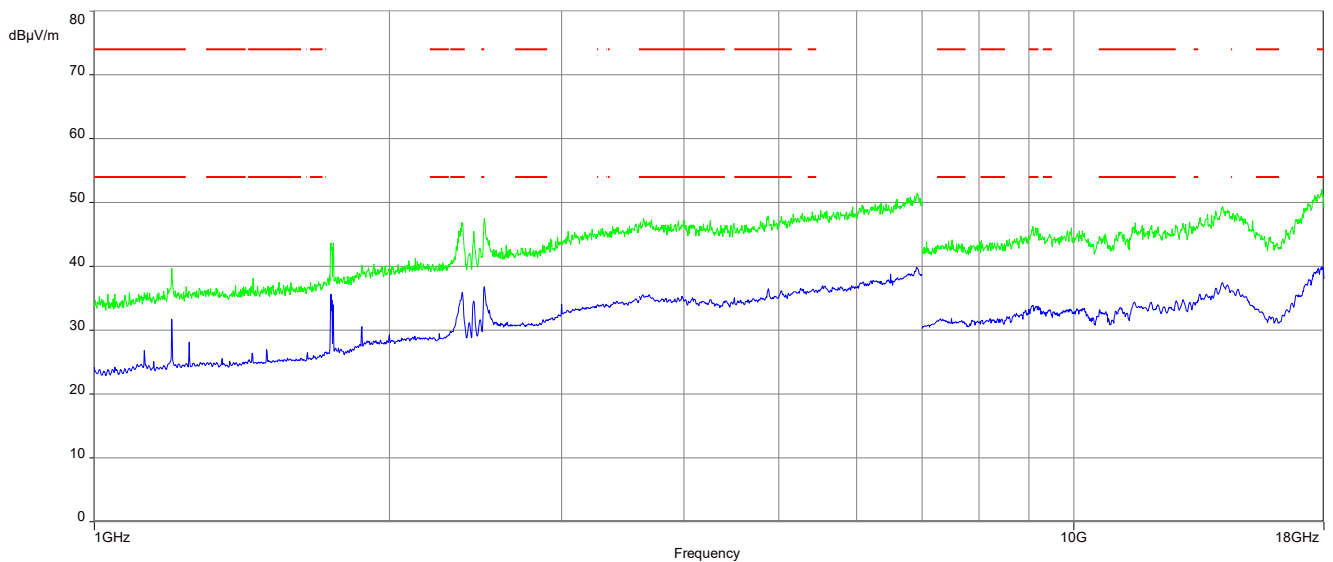
Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization



The carrier signal is notched with a 2.4 GHz band rejection filter.

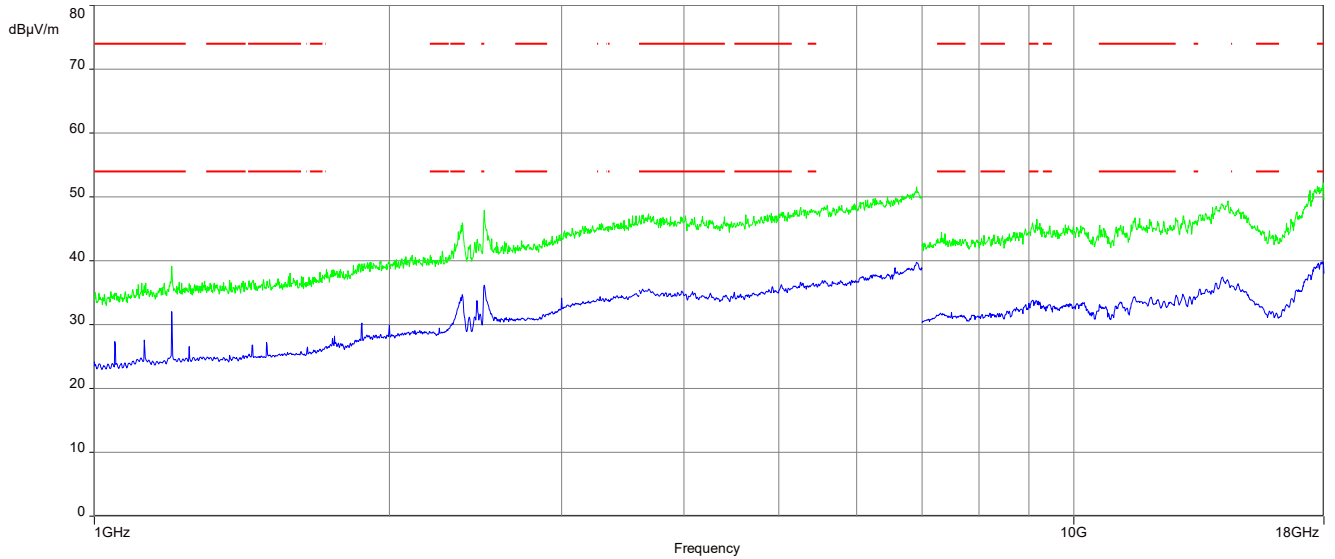
Plots: g-mode**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

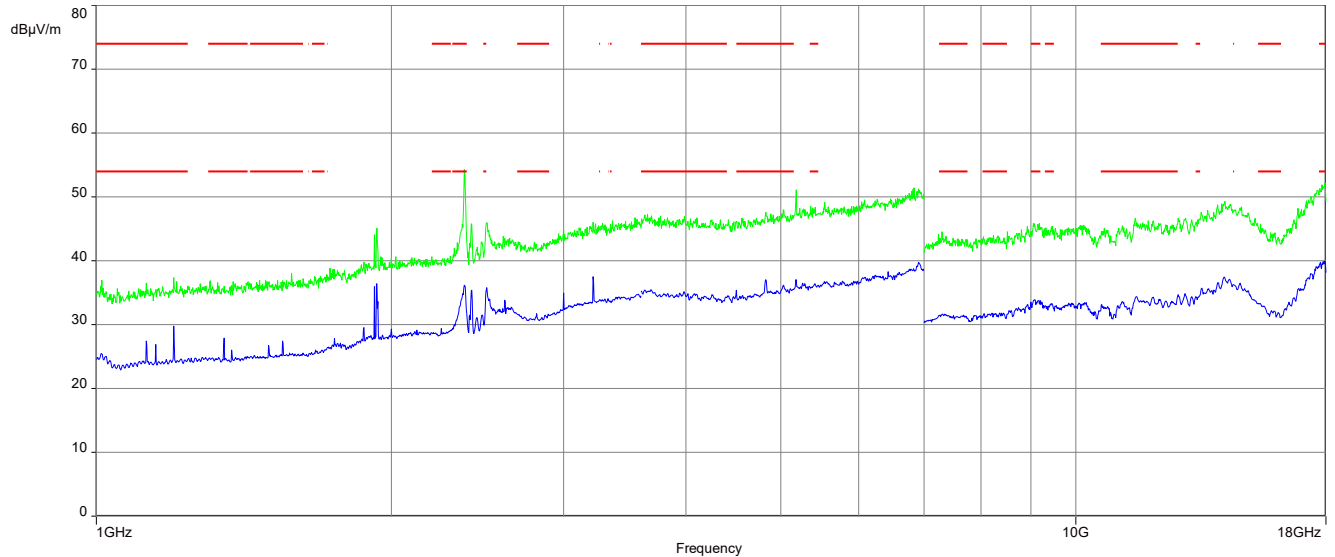
Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

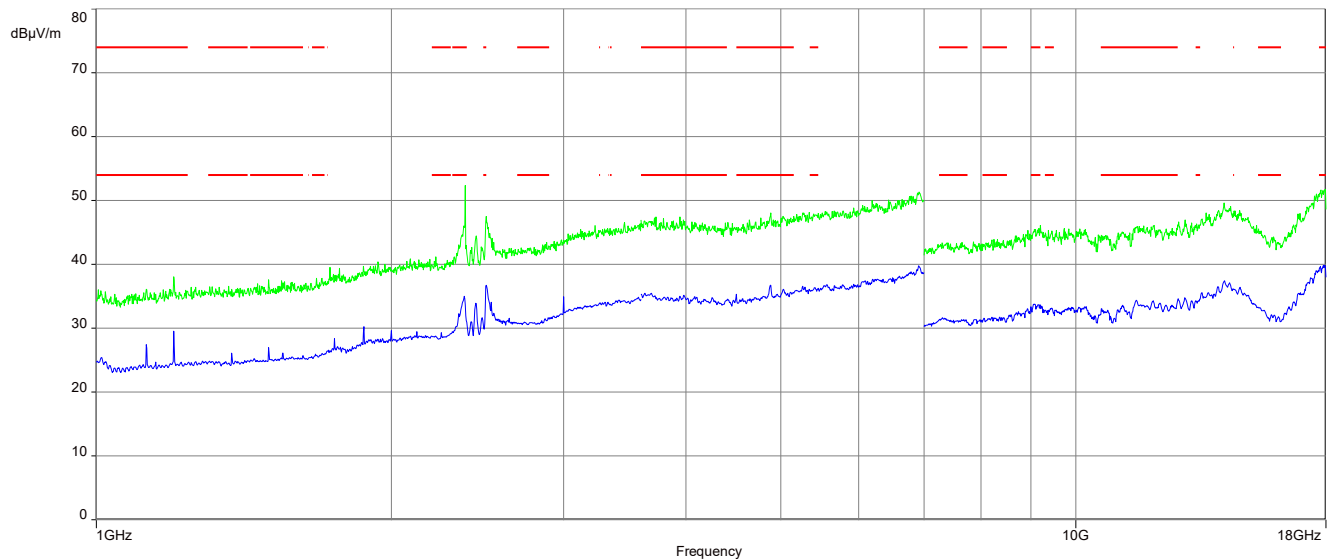
Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization



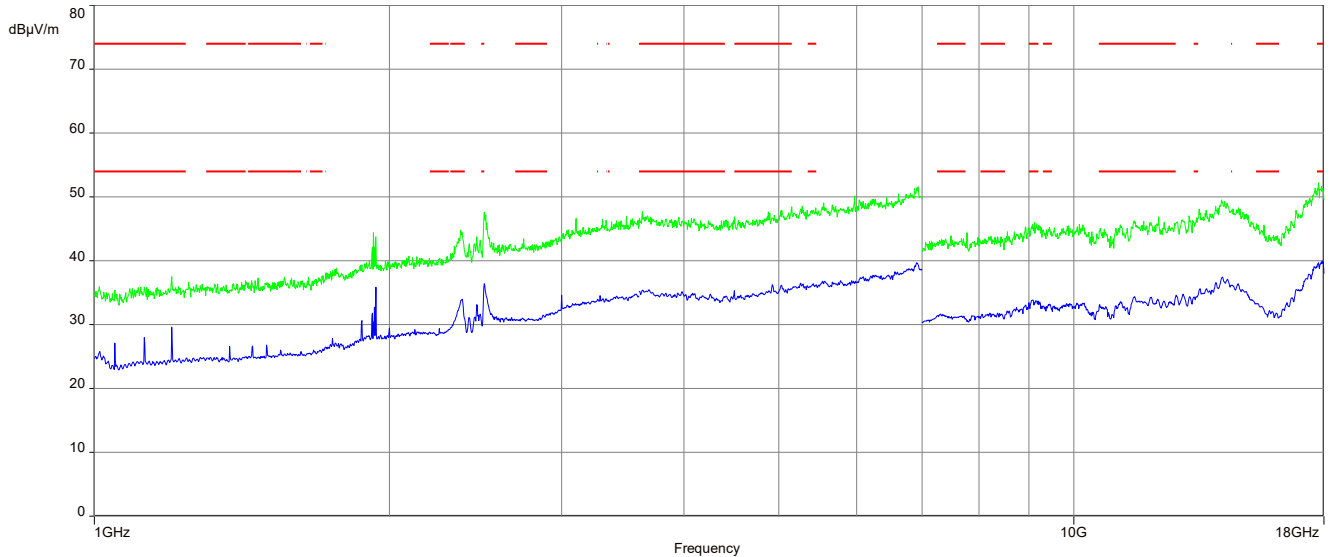
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plots: axHE20-mode**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

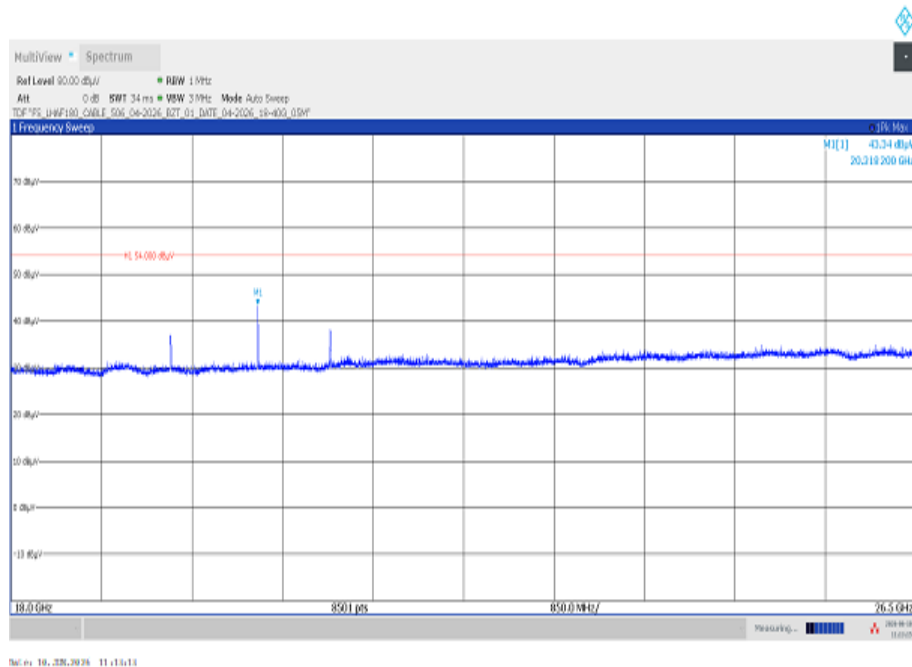
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization, valid for all channels and modes

13.14 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 7.5 setup A
Measurement uncertainty	See chapter 9

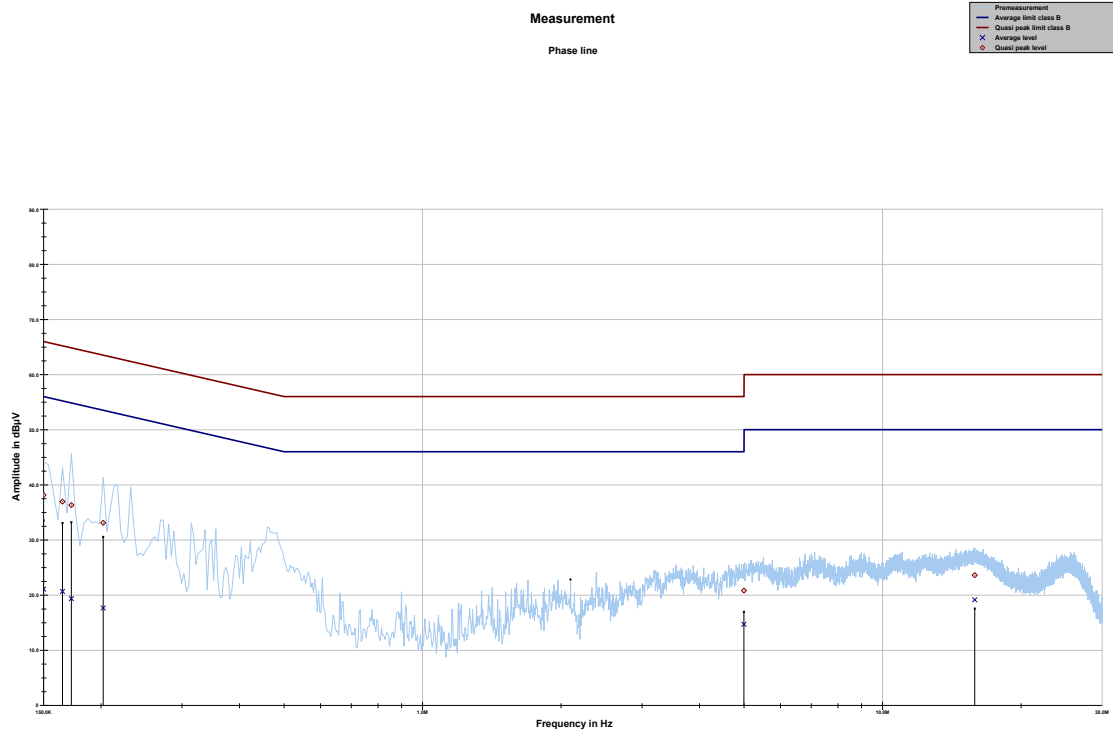
Limits:

FCC		ISED
Frequency / MHz	Quasi-Peak / (dB μ V / m)	Average / (dB μ V / m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

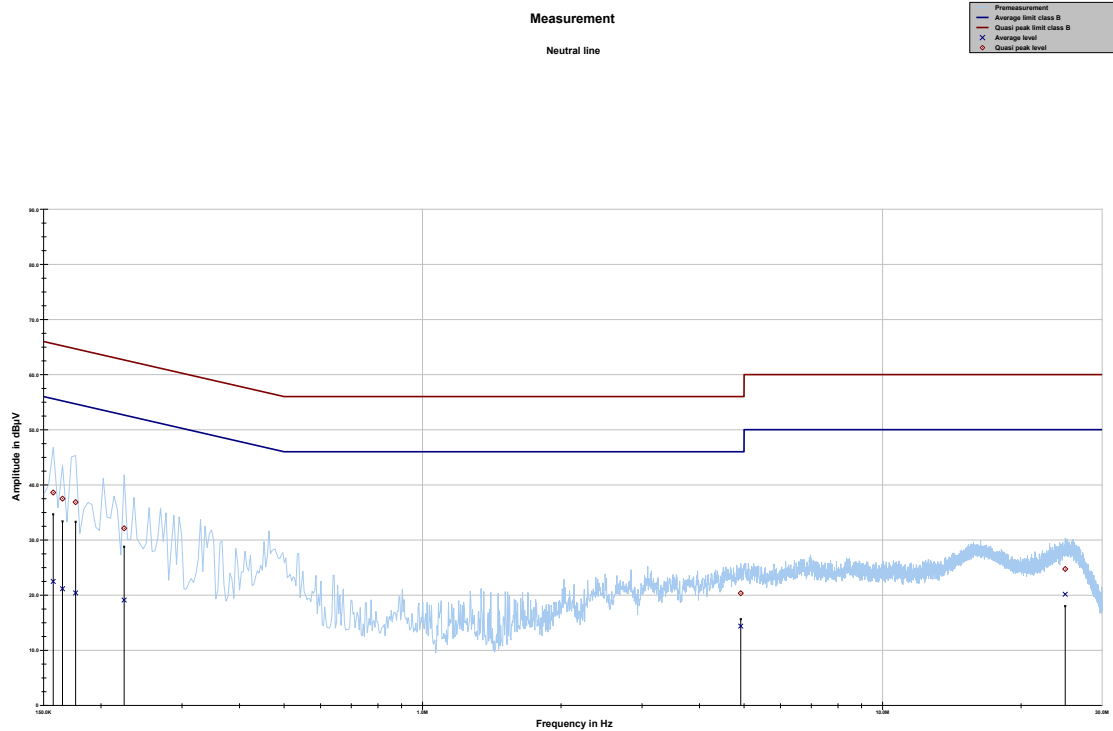
Plots: 120 V / 60 Hz

Plot 1: 150 kHz to 30 MHz, phase line



Project ID: 1-9318-25-02-02

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBμV	dB	dBμV	dBμV	dB	dBμV
0.150000	38.15	27.85	66.000	21.08	34.92	56.000
0.164925	36.95	28.26	65.212	20.67	34.90	55.574
0.172387	36.33	28.52	64.845	19.36	36.00	55.360
0.202237	33.11	30.41	63.518	17.66	36.85	54.508
4.996894	20.81	35.19	56.000	14.71	31.29	46.000
15.866025	23.61	36.39	60.000	19.14	30.86	50.000

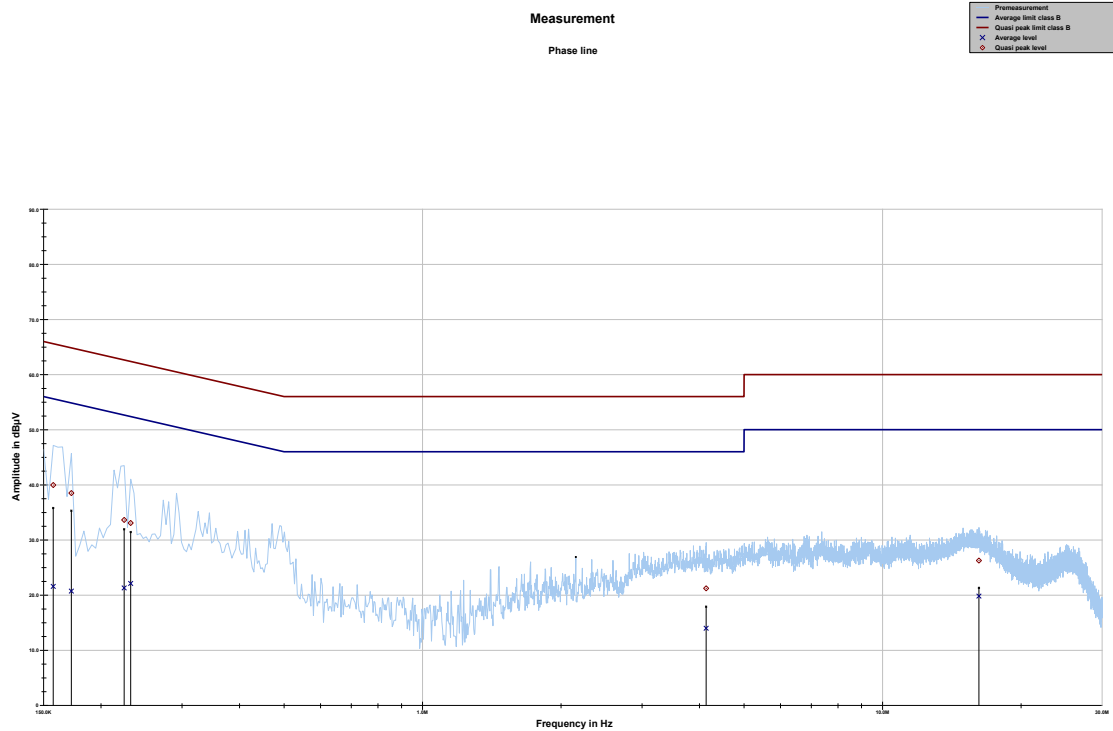
Plot 2: 150 kHz to 30 MHz, neutral line

Project ID: 1-9318-25-02-02

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.157463	38.59	27.00	65.597	22.47	33.32	55.787
0.164925	37.49	27.72	65.212	21.15	34.43	55.574
0.176119	36.85	27.82	64.667	20.38	34.87	55.254
0.224625	32.11	30.53	62.646	19.09	34.78	53.868
4.918538	20.34	35.66	56.000	14.38	31.62	46.000
24.947888	24.73	35.27	60.000	20.16	29.84	50.000

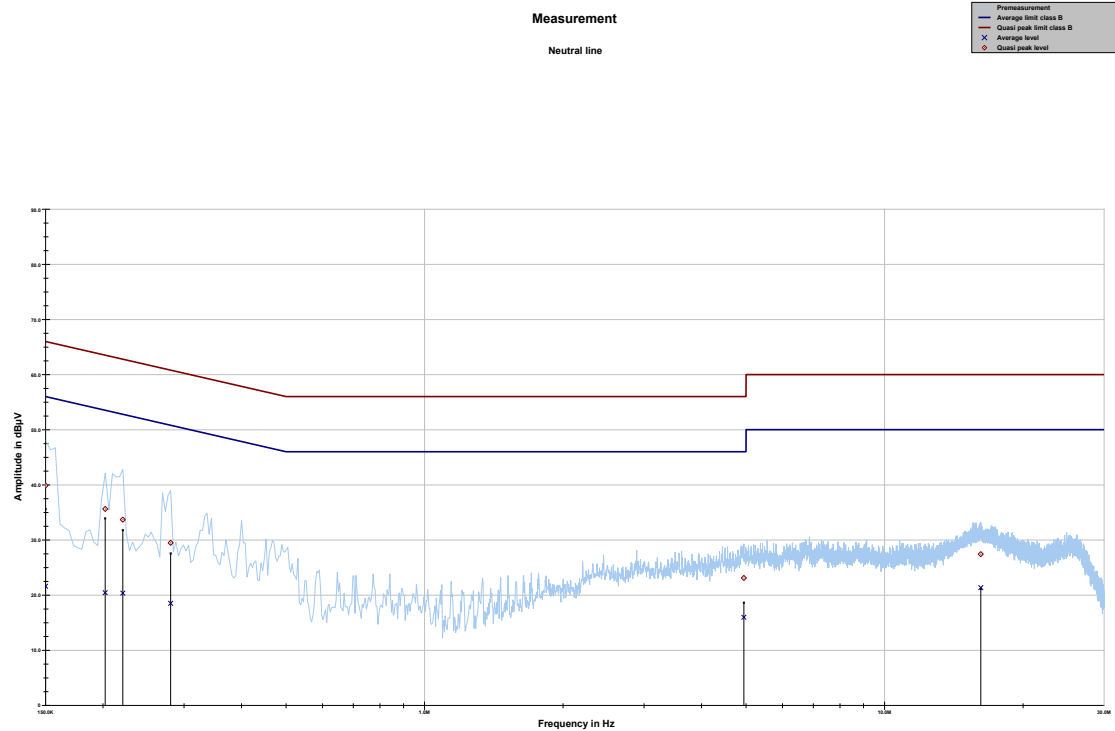
Plots: 230 V / 60 Hz

Plot 1: 150 kHz to 30 MHz, phase line



Project ID: 9318-25-02-02

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBμV	dB	dBμV	dBμV	dB	dBμV
0.157463	39.97	25.63	65.597	21.57	34.22	55.787
0.172387	38.51	26.34	64.845	20.72	34.64	55.360
0.224625	33.63	29.01	62.646	21.29	32.58	53.868
0.232088	33.07	29.30	62.375	22.11	31.54	53.655
4.134975	21.21	34.79	56.000	13.98	32.02	46.000
16.198106	26.26	33.74	60.000	19.82	30.18	50.000

Plot 2: 150 kHz to 30 MHz, neutral line

Project ID: 9318-25-02-02

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150000	39.86	26.14	66.000	21.61	34.39	56.000
0.202237	35.62	27.90	63.518	20.44	34.07	54.508
0.220894	33.69	29.09	62.785	20.35	33.62	53.974
0.280594	29.47	31.33	60.798	18.51	33.76	52.269
4.944656	23.11	32.89	56.000	15.97	30.03	46.000
16.194375	27.43	32.57	60.000	21.36	28.64	50.000

14 Glossary

AVG	Average
C	Compliant
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz
CAC	Channel availability check
CW	Clean wave
DC	Duty cycle
DFS	Dynamic frequency selection
DSSS	Dynamic sequence spread spectrum
DUT	Device under test
EN	European Standard
ETSI	European Telecommunications Standards Institute
EMC	Electromagnetic Compatibility
EUT	Equipment under test
FCC	Federal Communications Commission
FCC ID	Combination of Grantee Code and Equipment Product Code
FHSS	Frequency hopping spread spectrum
FVIN	Firmware version identification number
GNSS	Global Navigation Satellite System
GUE	GNSS User Equipment
HMN	Host marketing name
HVIN	Hardware version identification number
HW	Hardware
ISED	Innovation, Science and Economic Development Canada
Inv. No.	Inventory number
MC	Modulated carrier
NA	Not applicable
NC	Not compliant
NOP	Non occupancy period
NP	Not performed
OBW	Occupied bandwidth
OC	Operating channel
OCW	Operating channel bandwidth
OFDM	Orthogonal frequency division multiplexing
OOB	Out of band
OP	Occupancy period
PER	Packet error rate
PMN	Product marketing name
PP	Positive peak
QP	Quasi peak
RLAN	Radio local area network
S/N or SN	Serial number
SW	Software
UUT	Unit under test
WLAN	Wireless local area network

15 Document history

Version	Applied changes	Date of release
R01	Initial release	2026-06-29
R02	HVIN revised	2026-06-30

END OF TEST REPORT