


T2 20dB

2483.500000


2480.5736

MHz

PASS

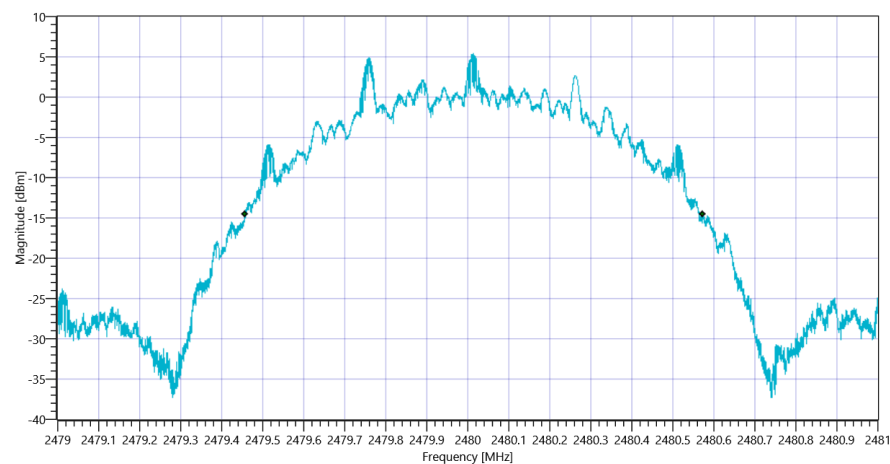

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_16032020_151144.png

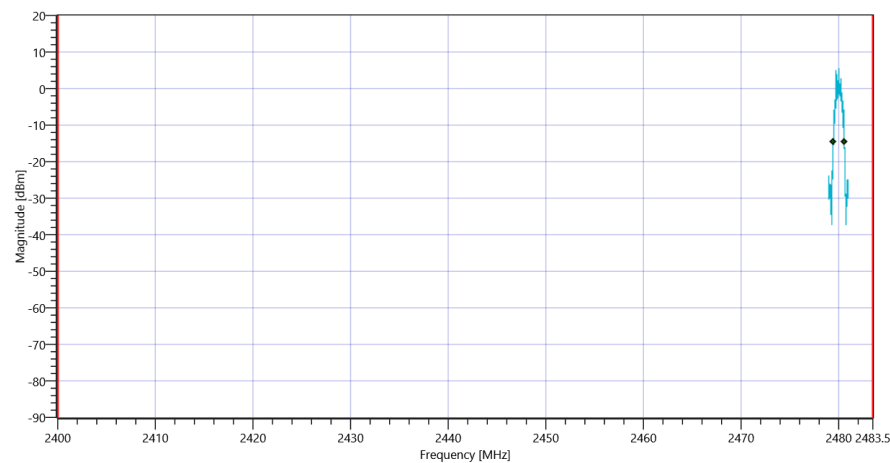

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE coded S2_16032020_151148.png

TEST FINISHED

General Verdict

16.03.2020 15:11:48 / RT: 135 s

PASS

17. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msp

Test References	
TC Start	16.03.2020 13:53:58
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msp
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msp
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.68 0 30				
Start [MHz] Stop [MHz]	24530.000 25030.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.33 MHz	---	---	8.57	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 20288.5 MHz	0	---	25.23	dB	INFO

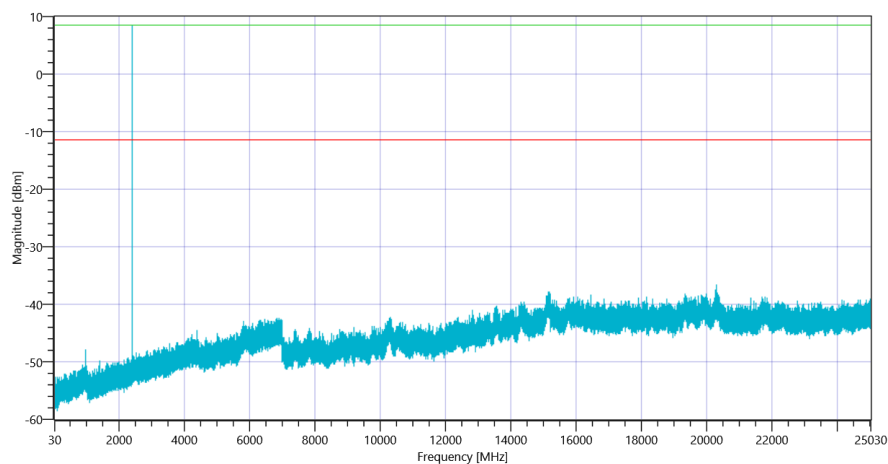

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_16032020_135844.png

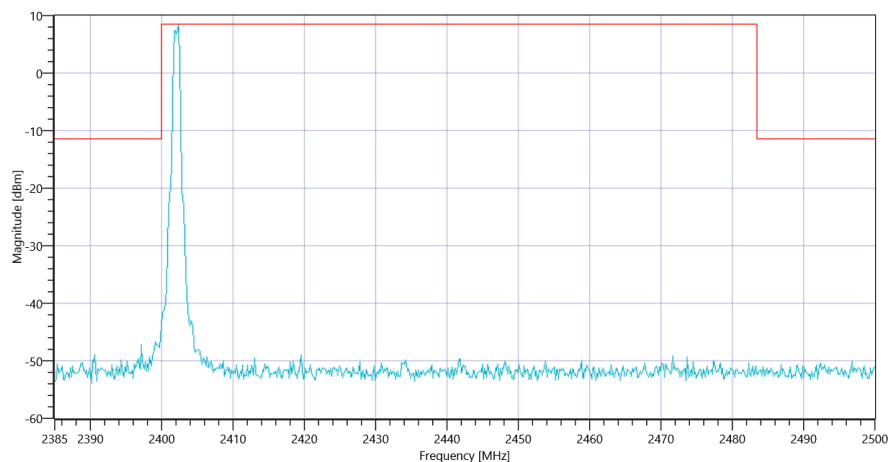


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_16032020_135847.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.72 0 30				
Start [MHz] Stop [MHz]	24530.000 25030.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2439.83 MHz	---	---	6.98	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 20289.333 MHz	0	---	24.3	dB	INFO

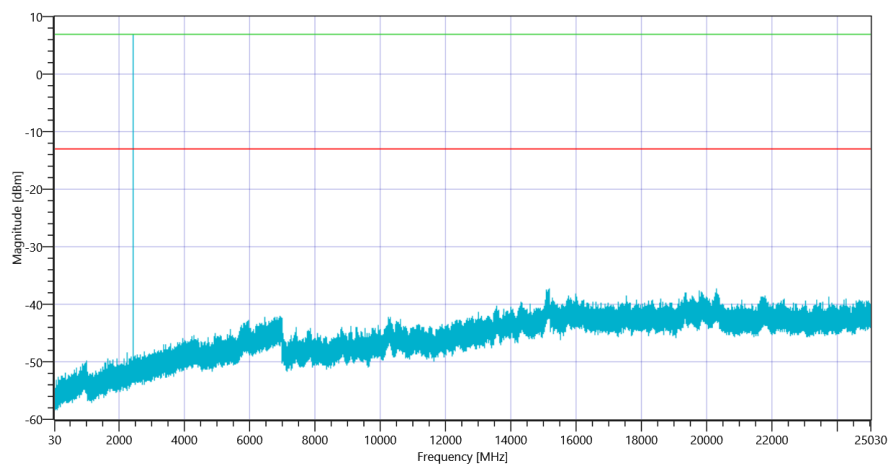

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_16032020_140338.png

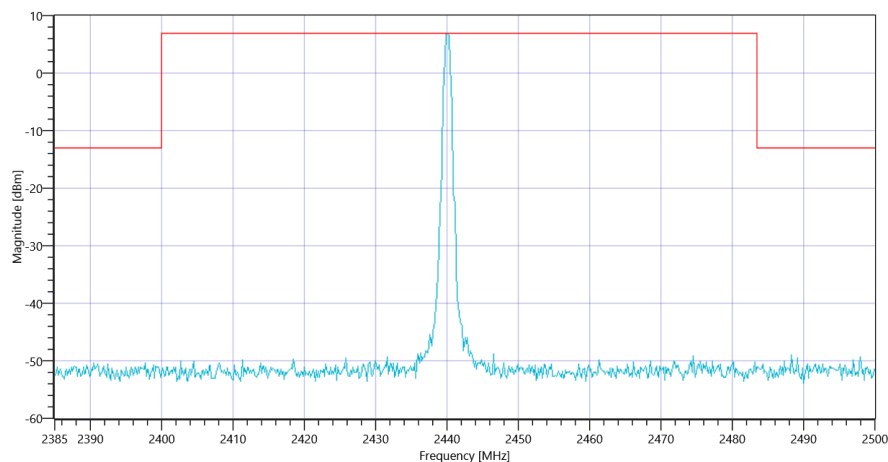


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_16032020_140341.png

Test at TX 2480 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.56 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.33 MHz	---	---	7.09	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15147.5 MHz	0	---	24.69	dB	INFO

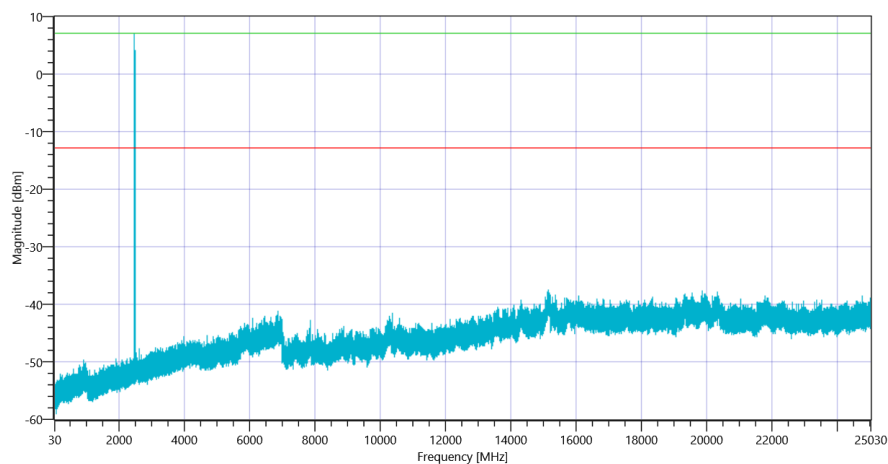

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_16032020_140831.png

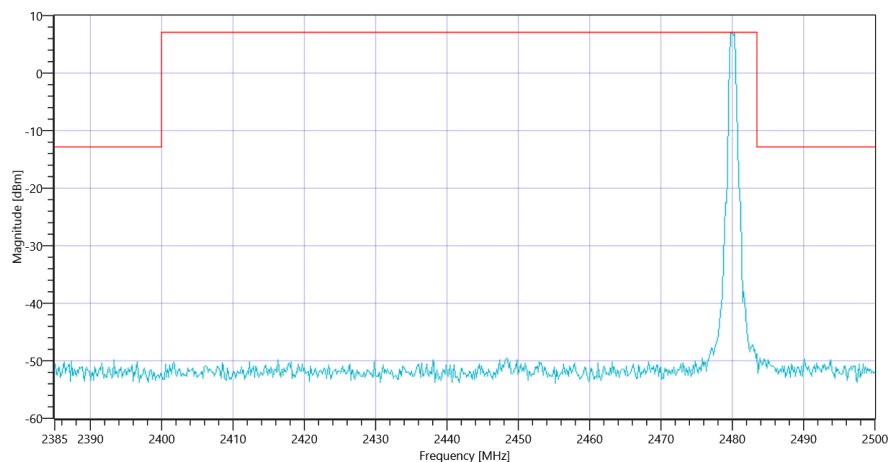

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2480_16032020_140834.png

TEST FINISHED		
General Verdict	16.03.2020 14:08:36 / RT: 877 s	PASS

18. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps

Test References	
TC Start	16.03.2020 14:17:50
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.72 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	5.40	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	16.74	dB	INFO

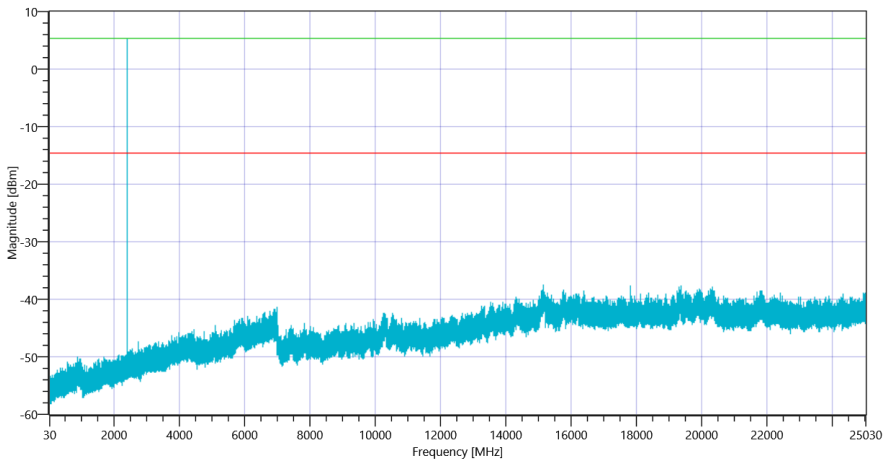

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2402_16032020_142237.png

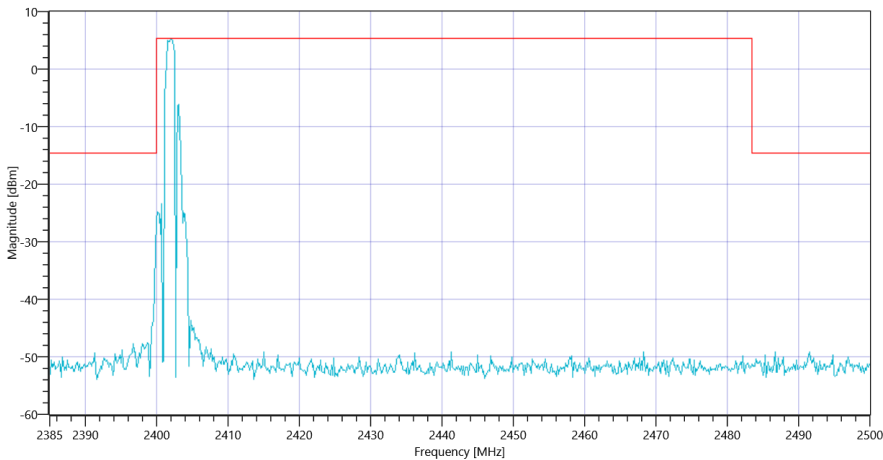


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2402_16032020_142239.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.72 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	8.52	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 20308.333 MHz	0	---	25.8	dB	INFO

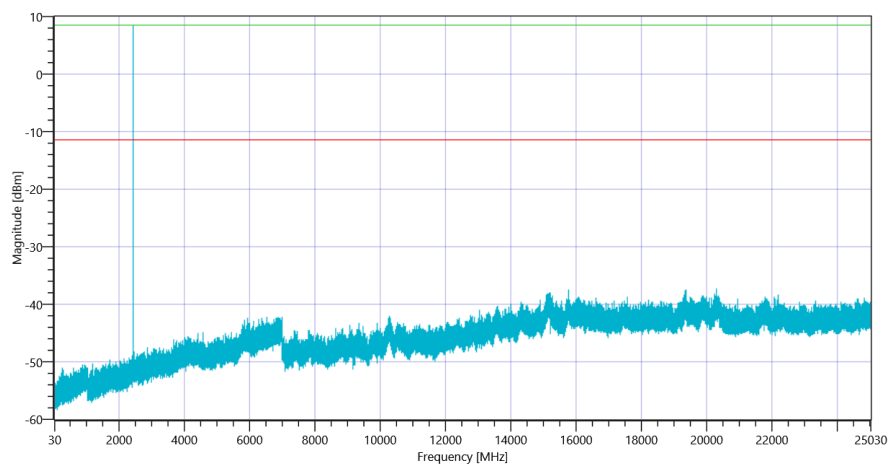

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_16032020_142730.png

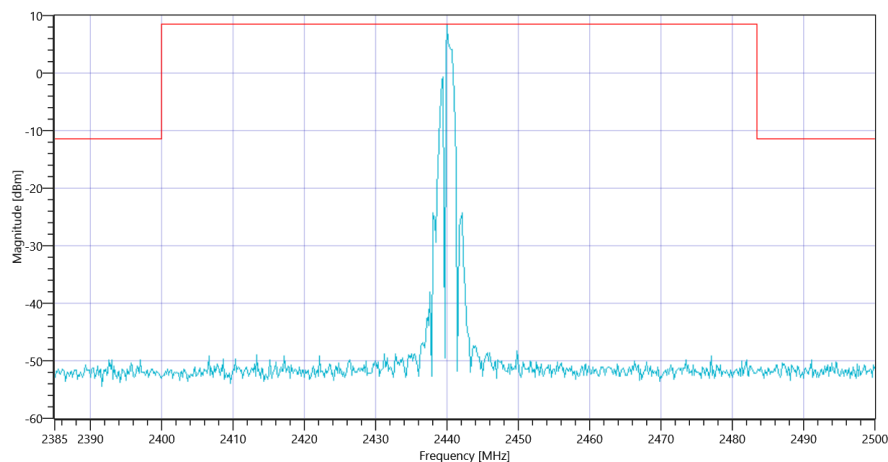


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2440_16032020_142733.png

Test at TX 2480 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.60 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.67 MHz	---	---	6.88	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15091.5 MHz	0	---	24.64	dB	INFO

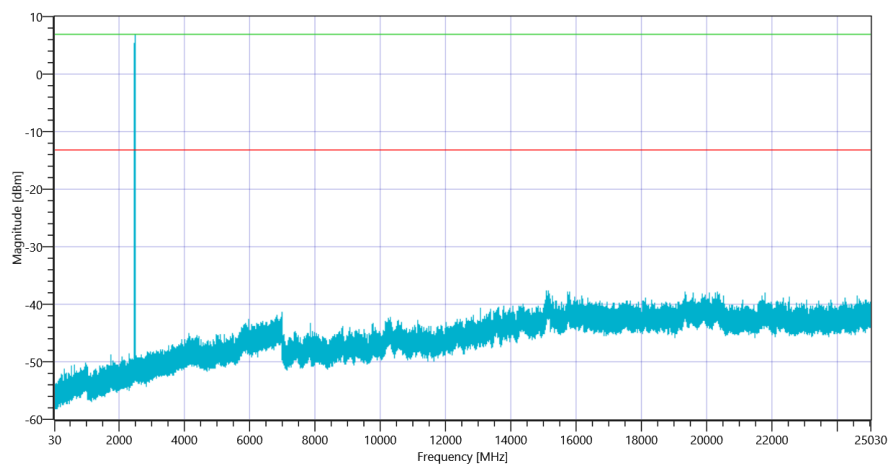

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2480_16032020_143224.png

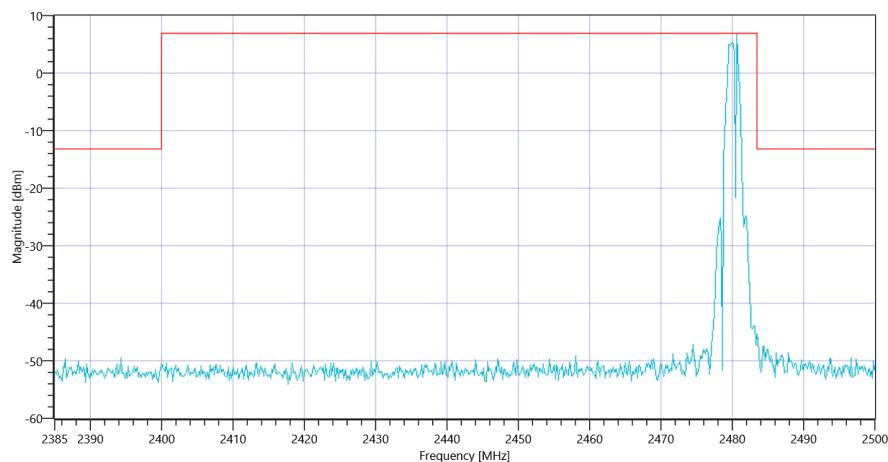

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps 2480_16032020_143227.png

TEST FINISHED		
General Verdict	16.03.2020 14:32:28 / RT: 878 s	PASS

19. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8

Test References	
TC Start	16.03.2020 14:47:05
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S8
Add. Information	


Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.74 0 30				
Start [MHz] Stop [MHz]	24530.000 25030.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	5.31	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 21828.667 MHz	0	---	23.16	dB	INFO

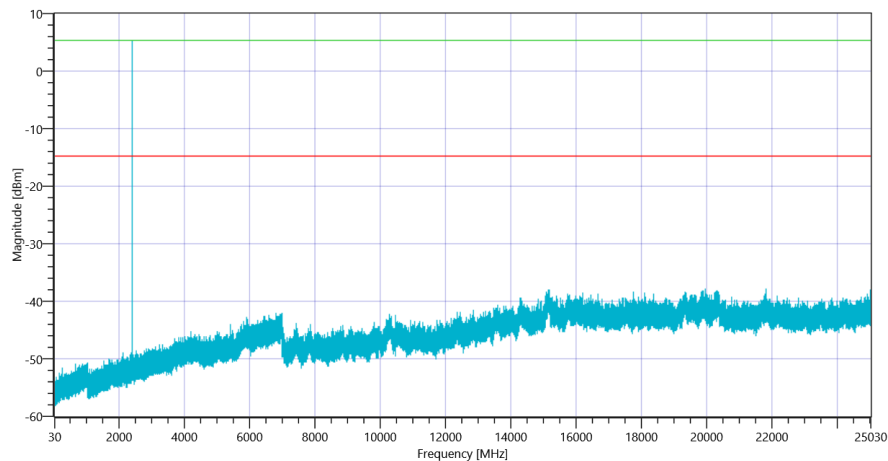

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2402_16032020_145151.png

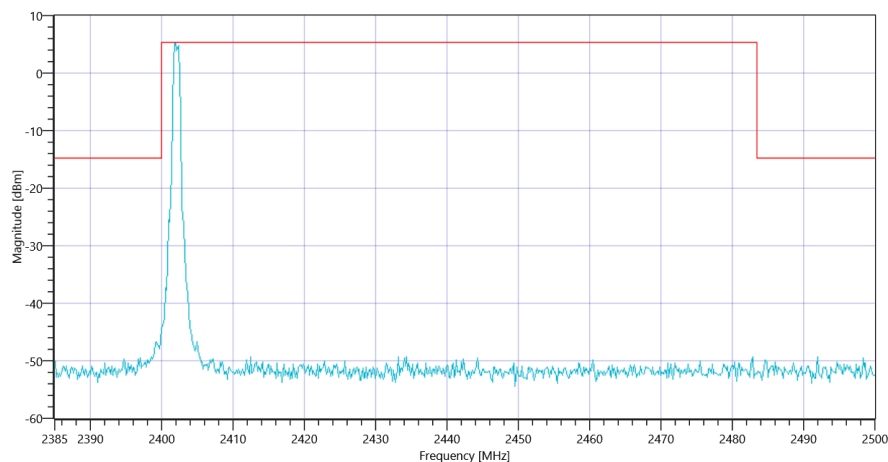


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2402_16032020_145154.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.72 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	5.15	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 20361.667 MHz	0	---	22.4	dB	INFO

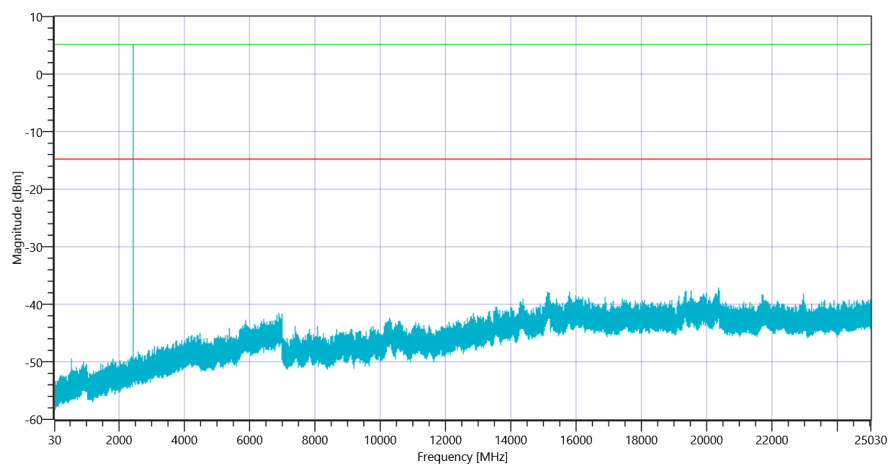

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2440_16032020_145645.png

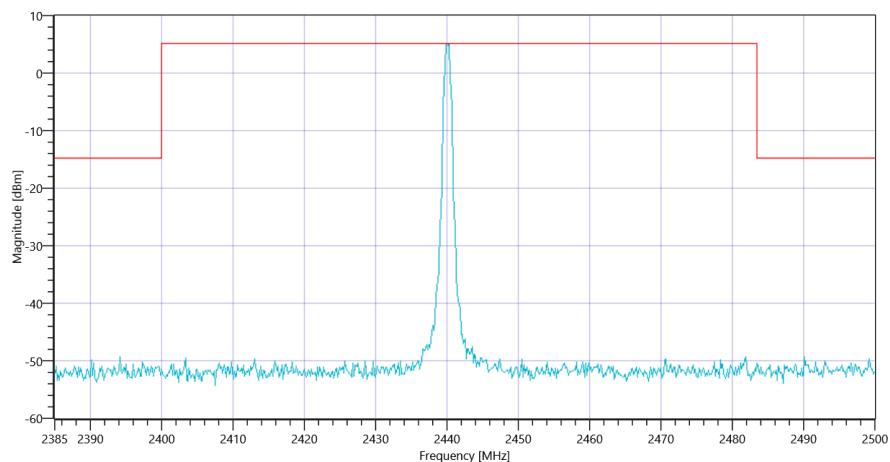



Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S8 2440_16032020_145648.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.60 0 30				
Start [MHz] Stop [MHz]	24530.000 25030.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	5.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 20386.5 MHz	0	---	21.95	dB	INFO

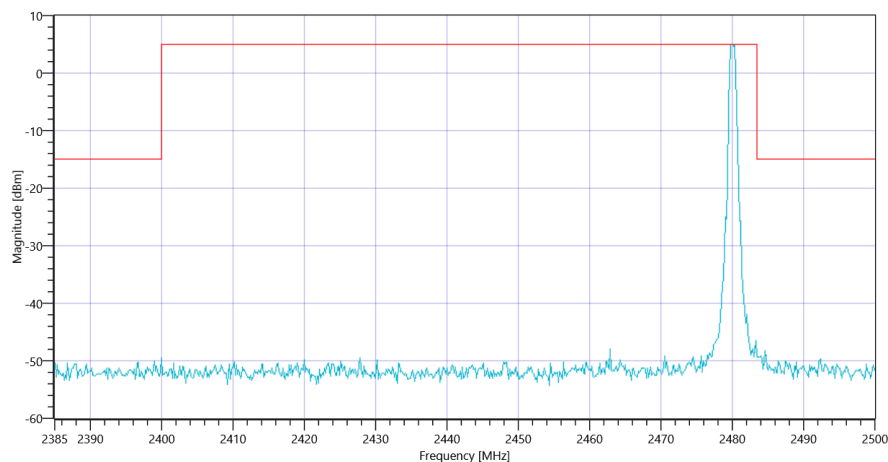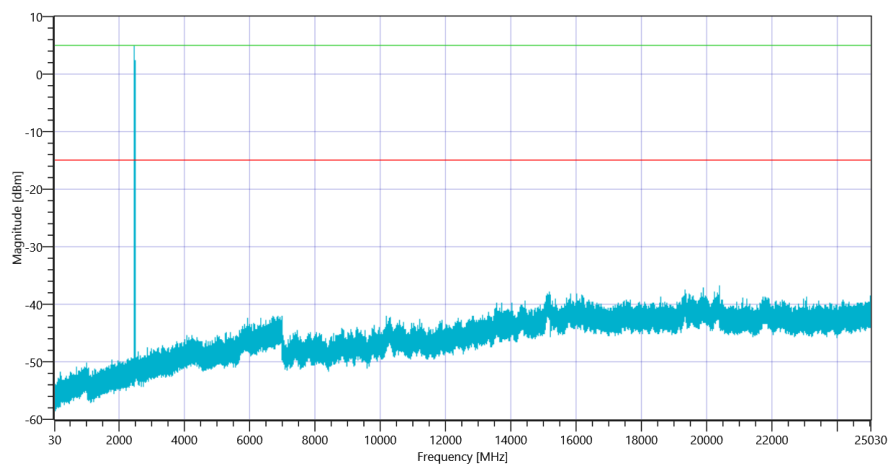

TEST FINISHED		
General Verdict	16.03.2020 15:01:44 / RT: 878 s	PASS

20. FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2

Test References	
TC Start	16.03.2020 15:11:53
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE coded S2
Add. Information	


Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.73 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2401.83 MHz	---	---	8.03	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 15185.167 MHz	0	---	25.31	dB	INFO

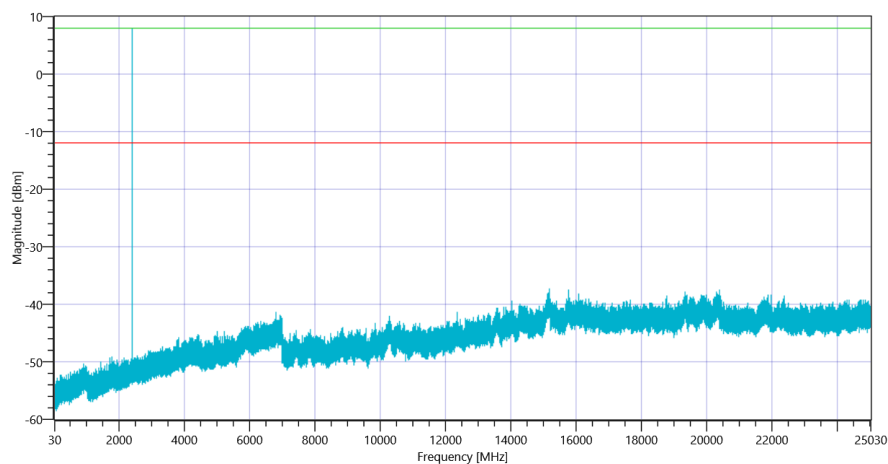

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2402_16032020_151640.png

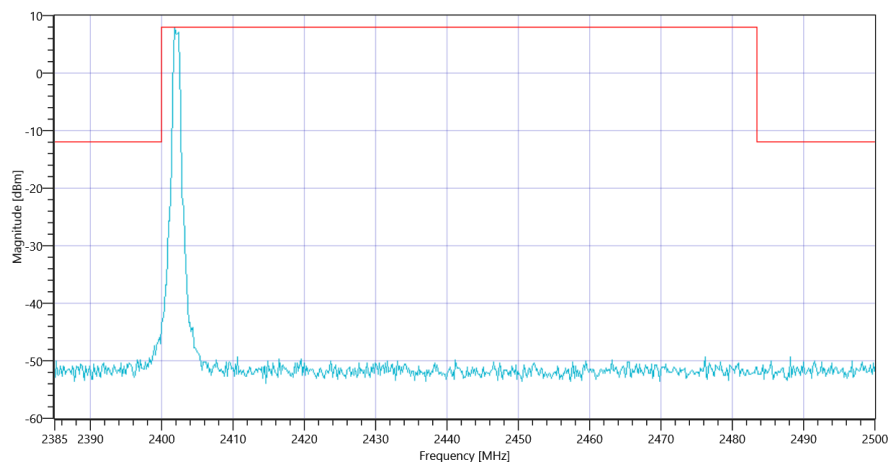


Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2402_16032020_151643.png

Test at TX 2440 MHz


DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.75 0 30		
Start [MHz] Stop [MHz]			24530.000 25030.000		
RBW [MHz] VBW [MHz]			0.100000 0.300000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			500 8 3001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	8.54	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19334 MHz	0	---	25.81	dB	INFO

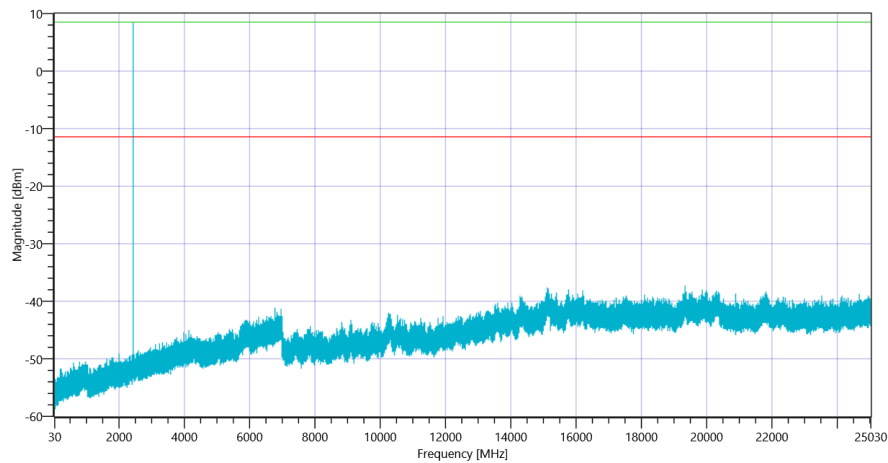

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2440_16032020_152134.png

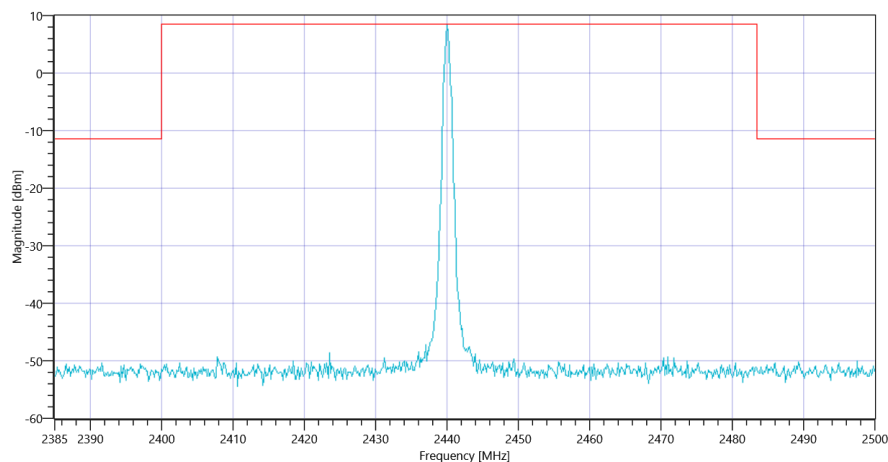



Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE coded S2 2440_16032020_152137.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.63 0 30				
Start [MHz] Stop [MHz]	24530.000 25030.000				
RBW [MHz] VBW [MHz]	0.100000 0.300000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2480.00 MHz	---	---	6.95	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19342 MHz	0	---	24.45	dB	INFO

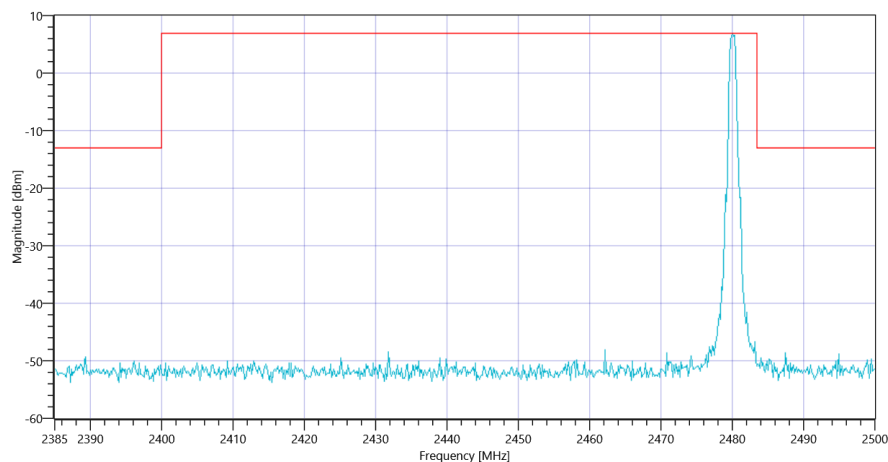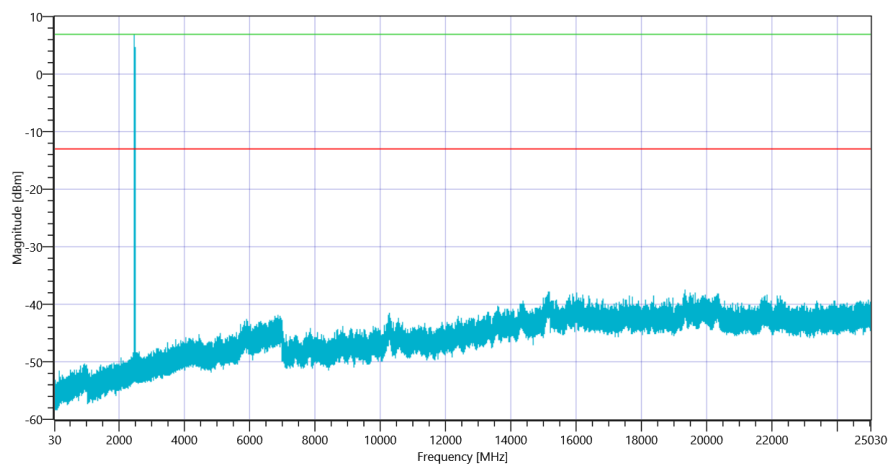

TEST FINISHED		
General Verdict	16.03.2020 15:26:33 / RT: 879 s	PASS

21. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE 1 Msps

Test References	
TC Start	16.03.2020 14:08:40
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
Class / TC Version	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Peak_V01 Version: 0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.38 10.09 20	
Start [MHz] Stop [MHz]	2388.000 2390.000	
RBW [MHz] VBW [MHz]	0.100000 0.002000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	8 300 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-57.89	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-57.89	dBm	PASS

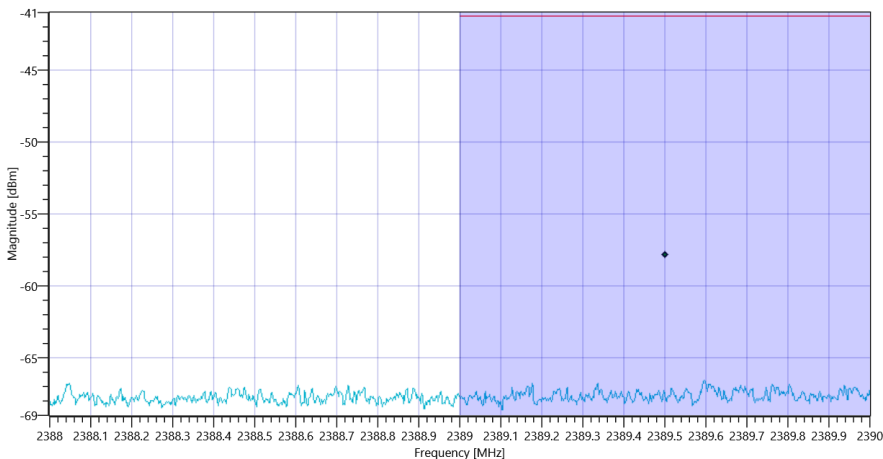


Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE 1 Msps_16032020_140901.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.40 10.15 20		
Start [MHz] Stop [MHz]			2483.500 2485.500		
RBW [MHz] VBW [MHz]			0.100000 0.002000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			8 300 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-52.16	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-52.16	dBm	PASS

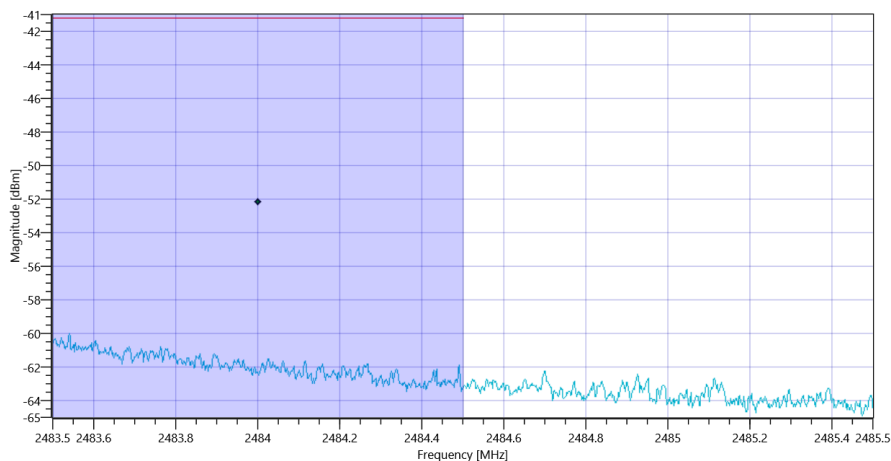

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE 1 Msp.16032020_140924.png

TEST FINISHED		
General Verdict	16.03.2020 14:09:24 / RT: 43 s	PASS

22. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE 2 Msps

Test References	
TC Start	16.03.2020 14:32:33
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
Class / TC Version	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Peak_V01 Version: 0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE 2 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.44 10.09 20		
Start [MHz] Stop [MHz]			2388.000 2390.000		
RBW [MHz] VBW [MHz]			0.100000 0.002000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			8 300 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-56.46	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-56.46	dBm	PASS

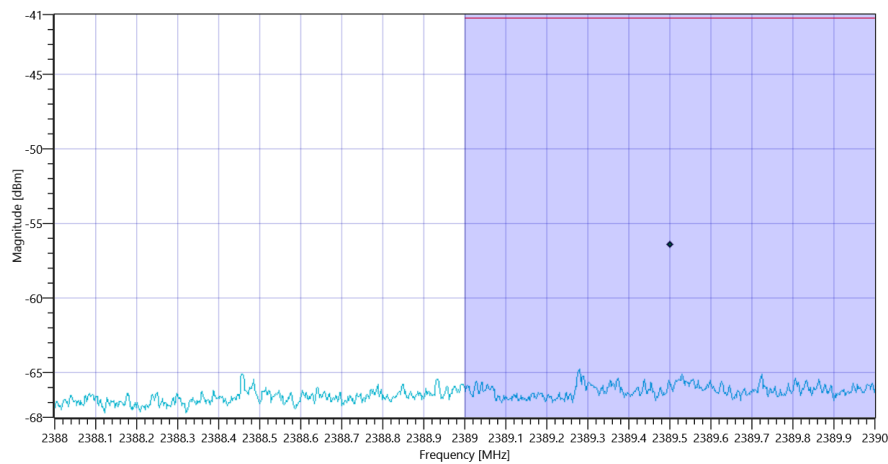


Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE 2 Msps_16032020_143253.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.44 10.15 20				
Start [MHz] Stop [MHz]	2483.500 2485.500				
RBW [MHz] VBW [MHz]	0.100000 0.002000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	8 300 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-47.48	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-47.48	dBm	PASS

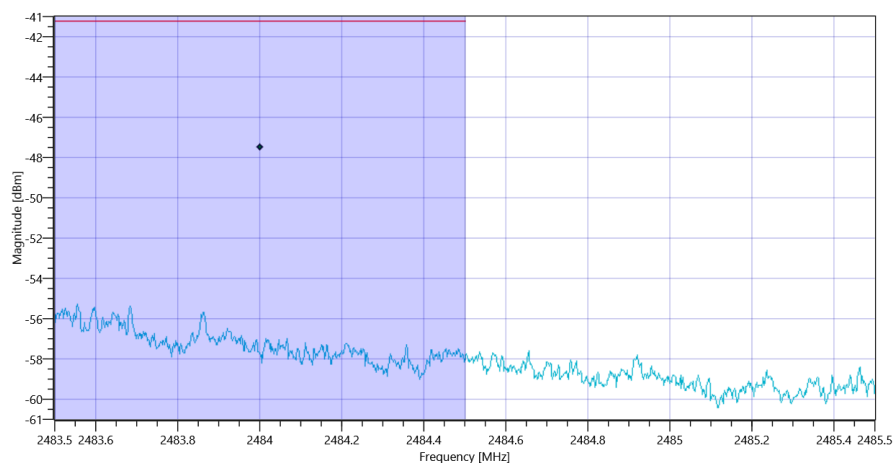

TEST FINISHED		
General Verdict	16.03.2020 14:33:17 / RT: 44 s	PASS

23. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S8

Test References	
TC Start	16.03.2020 15:01:49
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
Class / TC Version	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Peak_V01 Version: 0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S8
Add. Information	


Test Parameter	
Technology to test	BT LE coded S8
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			13.45 10.09 20		
Start [MHz] Stop [MHz]			2388.000 2390.000		
RBW [MHz] VBW [MHz]			0.100000 0.000200		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			78 300 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-59.66	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-59.66	dBm	PASS

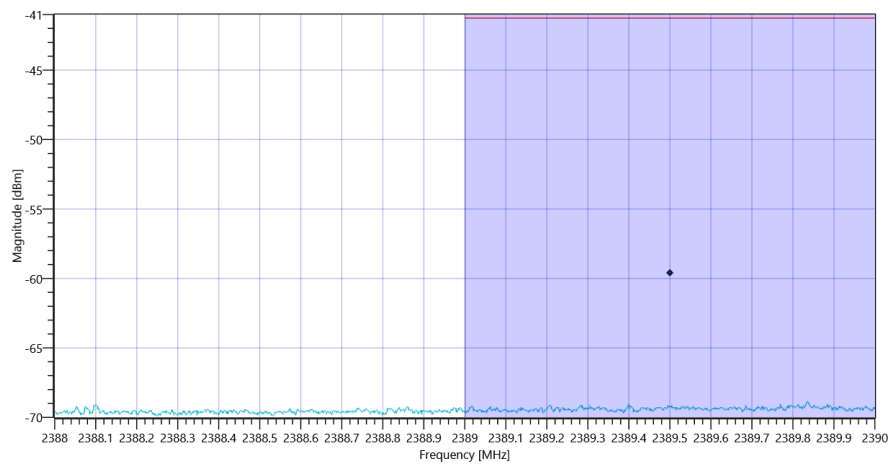


Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S8_16032020_150233.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.44 10.15 20				
Start [MHz] Stop [MHz]	2483.500 2485.500				
RBW [MHz] VBW [MHz]	0.100000 0.000200				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	78 300 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-53.79	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-53.79	dBm	PASS

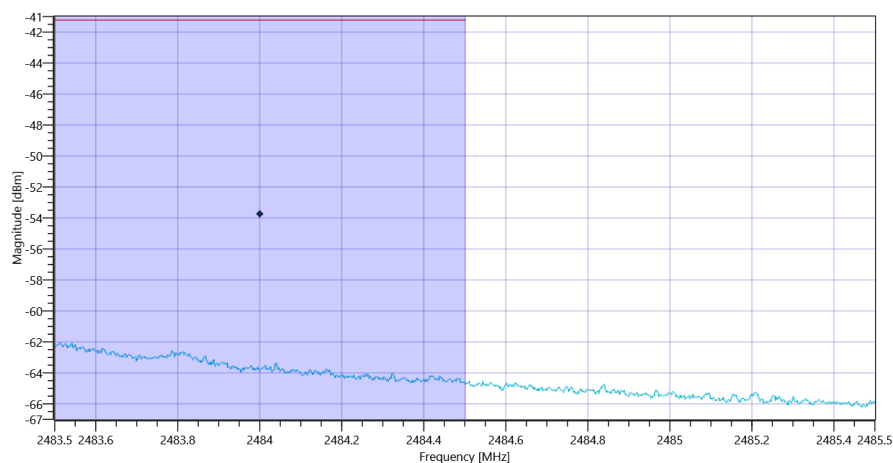

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S8_16032020_150319.png

TEST FINISHED		
General Verdict	16.03.2020 15:03:20 / RT: 91 s	PASS

24. FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S2

Test References	
TC Start	16.03.2020 15:26:38
System Version	1.0.0.40
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - 8.7.3 Integration Method; ANSI C63.10-2013 11.13.3.2 Peak Detection
Class / TC Version	TC_VM_FCC15247_Restricted_Band_Edge_Conducted_Peak_V01 Version: 0.0.1
My Description	FCC 15.247 Restricted Band Edge Conducted Peak DTS - BT LE coded S2
Add. Information	


Test Parameter	
Technology to test	BT LE coded S2
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.44 10.09 20	
Start [MHz] Stop [MHz]	2388.000 2390.000	
RBW [MHz] VBW [MHz]	0.100000 0.000500	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	31 300 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-59.2	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-59.2	dBm	PASS

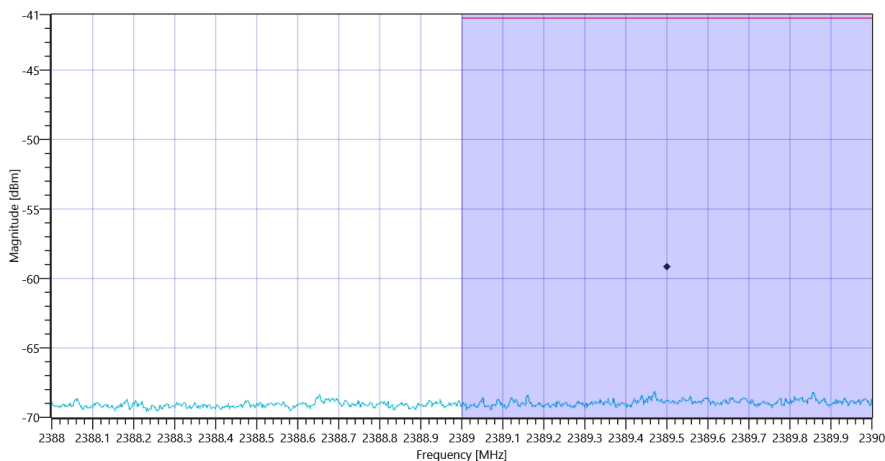


Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S2_16032020_152706.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.44 10.15 20				
Start [MHz] Stop [MHz]	2483.500 2485.500				
RBW [MHz] VBW [MHz]	0.100000 0.000500				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	31 300 1001 SWE				

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Band Power without Antenna Gain	---	-41.23	-53.32	dBm	Information
Band Power incl. Antenna Gain	---	-41.23	-53.32	dBm	PASS

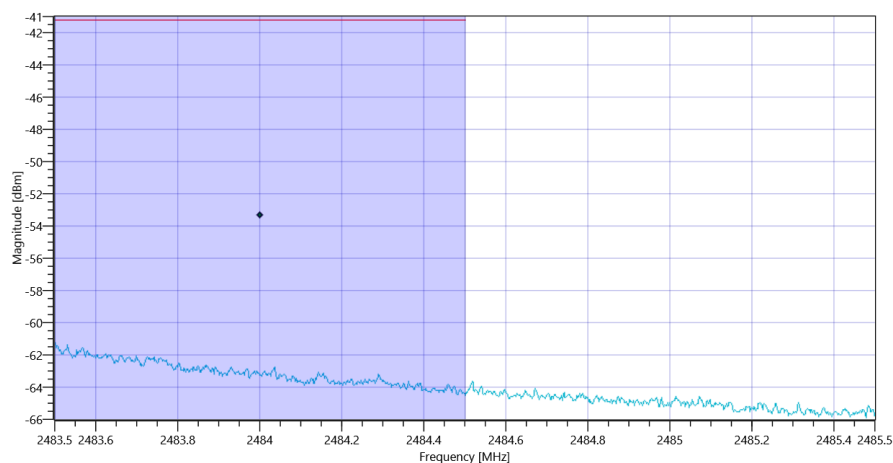

Plot_FCC Part 15.247 Restricted Band Edge Conducted Peak DTS Video Avg ~ BT LE coded S2_16032020_152738.png

TEST FINISHED		
General Verdict	16.03.2020 15:27:39 / RT: 60 s	PASS

25. Common2G4 Peak OP 3MHz/3MHz ~ BT LE 1 Msps

Test References	
TC Start	16.03.2020 13:44:07
System Version	1.0.0.40
Test Specification	None
Test Method	
Class / TC Version	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz - BT LE 1 Msps
Add. Information	


Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.170 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.40 10.09 25	
Start [MHz] Stop [MHz]	2399.500 2404.500	
RBW [MHz] VBW [MHz]	3.000000 3.000000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.41	dBm	Info
Peak Power	---	---	6.934258	mW	Info
Frequency at Peak	---	---	2401.76	MHz	Info

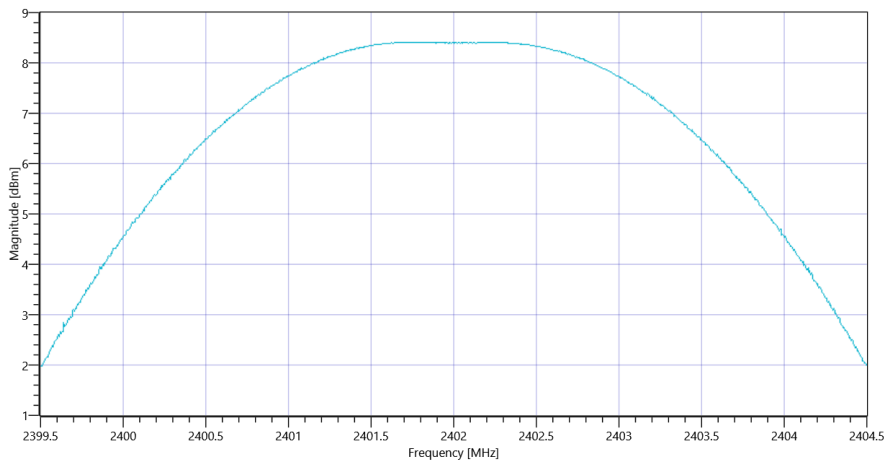

Plot_Common2G4 Peak OP 3MHz-3MHz ~ BT LE 1 Msps_16032020_134434.png

Test at TX 2440 MHz

DTM Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.46 10.1 25
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.5	dBm	Info
Peak Power	---	---	7.079458	mW	Info
Frequency at Peak	---	---	2440.235	MHz	Info

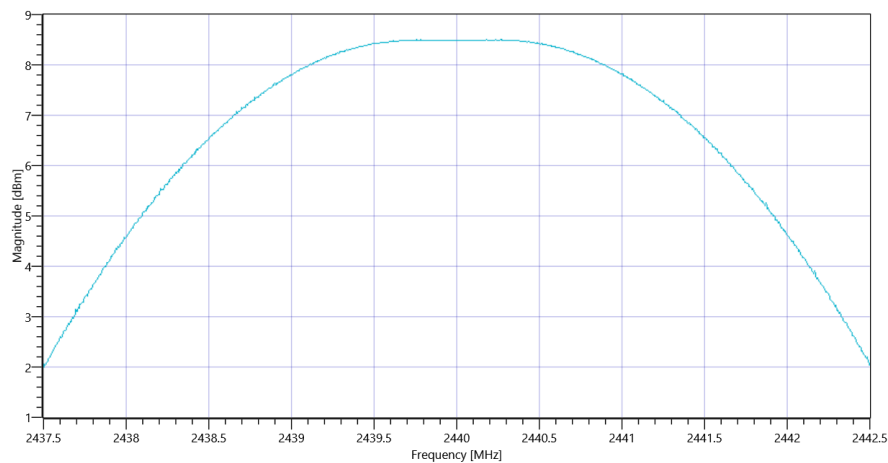


Plot_Common2G4 Peak OP 3MHz-3MHz ~ BT LE 1 Msps_16032020_134505.png

Test at TX 2480 MHz

DTM Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	---	PASS

READ SA SETTINGS:					
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]			18.40 10.15 25		
Start [MHz] Stop [MHz]			2477.500 2482.500		
RBW [MHz] VBW [MHz]			3.000000 3.000000		
Detector TraceMode			POS MAXH		
Sweep: Time [ms] Count Points per Section Type			1000 10 1001 SWE		

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.48	dBm	Info
Peak Power	---	---	7.046931	mW	Info
Frequency at Peak	---	---	2480.2	MHz	Info

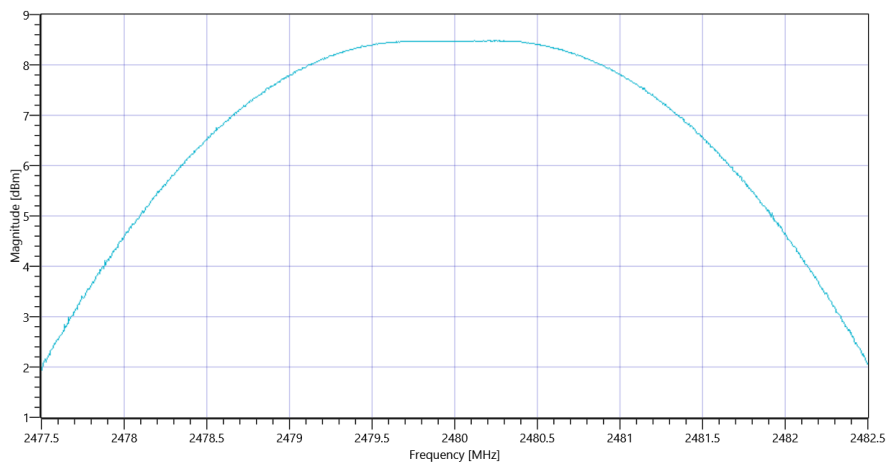

TEST FINISHED		
General Verdict	16.03.2020 13:45:36 / RT: 89 s	PASS

- END OF DOCUMENT -