

Test report No:
83342REM.002

Test report

**FCC Rules and Regulations CFR 47, Part 15, Subpart B
(10-1-23 Edition) & ICES-003 Issue 7 (October 2020)**

(*) Identification of item tested	Telematic control unit with wireless technologies, used in automotive industry.
(*) Trademark	VW AG
(*) Model and /or type reference	TKCMOD12N00B
(*) Derived model not tested	TKCMOD11000B
Other identification of the product	FCC ID = T8GCONMODMEB IC = 6434A-CONMODMEB
(*) Features	GSM, UMTS, LTE, 5G, Bluetooth EDR, BT Low-Energy, Wi-Fi, GNSS receiver HW version: X10 SW version: X067
Manufacturer	HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH Becker-Goering-Str. 16 76307, Karlsbad, GERMANY
Test method requested, standard	FCC Rules and Regulations CFR 47, Part 15, Subpart B (10-1-23 Edition) & ICES-003 Issue 7 (October 2020)
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez EMC Consumer & RF Lab. Manager 
Date of issue	2025-09-18
Report template No	FDT08_25 (*) "Data provided by the client"

Firmado
digitalmente por
53680346W
JOSE MANUEL
GOMEZ
(C:A29507456)



Index

ACRONYMS3

COMPETENCES AND GUARANTEES3

GENERAL CONDITIONS3

UNCERTAINTY3

DATA PROVIDED BY THE CLIENT4

USAGE OF SAMPLES6

TEST SAMPLE DESCRIPTION7

IDENTIFICATION OF THE CLIENT8

TESTING PERIOD AND PLACE8

DOCUMENT HISTORY8

ENVIRONMENTAL CONDITIONS9

REMARKS AND COMMENTS10

TESTING VERDICTS10

LIST OF EQUIPMENT USED DURING THE TEST10

SUMMARY11

APPENDIX A: TEST RESULTS12

Acronyms

Acronym ID	Acronym Description
Code	EMC Test Code
Freq Rng	Frequency Range
MP	Measurement Point
OM	Operation Mode
S/	Sample
V	Verdict

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the measured conducted disturbance characteristics of EUT from 150 kHz to 30 MHz is $I = \pm 3,9$ dB for quasi-peak measurements, $I = \pm 3,2$ dB for peak measurements ($k = 2$).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 1000 MHz is $I = \pm 4,9$ dB for quasi-peak measurements, $I = \pm 4,6$ dB for peak measurements ($k = 2$).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 1000 MHz to 12.75 GHz is $I = \pm 2,6$ dB for peak and average measurements ($k = 2$).

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a Telematics control unit with wireless technologies, used in automotive, equipped with one modem, OEM. This unit was designed for automotive usage and contains the following features: GSM, UMTS, LTE, 5G, GNSS, Wifi (a, b, g, n, ac,ax) and Bluetooth EDR.
3. Derived model not tested. These models have been declared by the supplier of the sample as being the same as the model under test.

HARMAN Becker Automotive Systems GmbH

Becker-Goering-Str. 16
76307 Karlsbad, Germany



Date: August 05th, 2025

To whom it may concern,

We,

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
Becker-Goering-Str. 16; 76307 Karlsbad, Germany,

Hereby declare that the products listed below:

Type of equipment: Telematic control unit with wireless technologies used in automotive industry.

Brand name: VW AG

Model names: TKCMOD12N00B and TKCMOD11000B

are part of the same family and all the models are equal. The model TKCMOD12N00B is the most populated variant and is the one that has been tested. The model TKCMOD11000B is the same as TKCMOD12N00B but it has a different name because the cellular module is disabled (although is installed in the device).

The rest of interfaces (BT, WiFi, GNSS) are equal in all the variants.

In the table below you can find the different names based on the specific country target:

Country	Product Name	Part number	Variant	GNSS	Bluetooth WLAN	NAD (Activate)	WLANp
NAR (online variant)	TKCMOD12N00B	14A.035.741	V119	x	x	x	-
Rest of the world (offline variant)	TKCMOD11000B	14C.035.741	V156	x	x	-	-

As mentioned above, TKCMOD12N00B is the variant that has been tested and results are applicable to the rest of the variants.

Sincerely,

i.v. 

By: Iulian-George Stoica
Title: Principal Engineer, Quality Engineering
E-mail: iulian.stoica@harman.com
Telephone: +40799 306 699

Company: Harman Becker Automotive Systems GmbH

i.v. 

By: Banica Alin
Title: Regulatory Product Compliance Expert
E-mail: AlinLucian.Banica@harman.com

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date Reception	of	Application
S/01	83342C_1.1	TCU	TKCMOD12N00B	V11949S057900013	2025-08-04		Element Under Test
S/01	83342C_114.1	Ethernet Cable			2025-05-22		Auxiliary Element
S/01	77617B_411.1	Bumper5G Antenna	3J0.035.534	--	2025-08-13		Auxiliary Element
S/01	83342C_138.1	Antenna	4N0.035.500	28345	2025-07-03		Auxiliary Element
S/01	83342C_139.1	Antenna	4N0.035.500	28369	2025-07-03		Auxiliary Element
S/01	83342C_140.1	Antenna	4N0.035.500	28445	2025-07-03		Auxiliary Element
S/01	83342C_28.1	Shark Antenna	3WA.035507.G	29204	2025-05-22		Auxiliary Element
S/01	83342C_30.1	Yellow Box	USB to 4XUART	USB42HS083900031	2025-05-22		Auxiliary Element
S/01	83342C_46.1	Module Circuit Board		4585835	2025-05-22		Auxiliary Element
S/01	83342C_89.1	OABR Adapter Cable			2025-05-22		Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Sample used for Radiated testing. The antenna configuration used has been selected after to determine the worst case performing a RSE spotcheck with the mention antennas and these ones: 5B4.035.510 (BT/WLAN-Antenne 1), 5B4.035.510 (BT/WLAN-Antenne 2), 3WA.035.507.G (BT/WLAN-Antenne 3)

Test sample description

Ports..... :	Port name and description		Cable				
			Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾	
	RF connector – code			[]	[X]	[]	
	RF connector – code			[X]	[X]	[]	
	RF connector – code			[X]	[]	[]	
--							
Supplementary information to the ports..... :							
Rated power supply	Voltage and Frequency			Reference poles			
				L1	L2	L3	N
	[]	AC:	[]	[]	[]	[]	[]
	[X]	DC: 12V car battery (4.8 VDC inside of TCU)					
Rated Power	12V DC						
Clock frequencies.....	--						
Other parameters	See Technical description						
Software version	X067						
Hardware version	X10						
Dimensions in cm (W x H x D)	--						
Mounting position	[]	Table top equipment					
	[]	Wall/Ceiling mounted equipment					
	[]	Floor standing equipment					
	[]	Hand-held equipment					
	[X]	Other: automotive telematics control unit					
Modules/parts.....	Module/parts of test item			Type		Manufacturer	
	--						
Accessories (not part of the test item)	Description			Type		Manufacturer	
	--						
Documents as provided by the applicant.....	Description			File name		Issue date	
	--						

⁽³⁾ Only for Medical Equipment

Identification of the client

HARMAN BECKER AUTOMOTIVE SYSTEMS GMBH
Becker-Goering-Str. 16
76307, Karlsbad, GERMANY

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2025-08-11
Date (finish)	2025-08-12

Document history

Report number	Date	Description
83342REM.002	2025-09-18	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860mbar Max. = 1060mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860mbar Max. = 1060mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 60 %
Air pressure	Min. = 860mbar Max. = 1060mbar

Remarks and comments

The tests have been performed by the technical personnel: Fernando Chito Solis and Miguel Manuel López Guzmán.

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P
Partial Passed	P*

List of equipment used during the test

Control No.	Equipment	Model	Manufacturer	Next Calibration
08866	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2026-06-12
06132	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2026-04-28
06126	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2026-04-22
04612	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2027-10-15
04657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2026-06-12
05641	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2027-10-23
08856	PRE-AMPLIFIER G>30dB 18-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2025-02-27
09360	PRE-AMPLIFIER G>40dB 1-18 GHz	BLMA 0118-1M	BONN ELEKTRONIK	2025-08-05
06064	SEMIANECHOIC ABSORBER LINED CHAMBER	SAC-3	Frankonia	--
06329	SHIELDED ROOM	--	FRANKONIA	--
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	--

Summary

Test Specification	Requirement – Test case	Verdict	Remark
FCC CFR 47, Part 15, Subpart B (10-1-23 Edition) & ICES-003 Issue 7 (October 2020)	RE Radiated emission. Electromagnetic field measure	P	(1)
	CE Continuous conducted emission	N/A	(2)
<u>Supplementary information and remarks:</u> (1) Test required only to the 5th harmonics of the maximum internal work frequency in the EUT. (2) EUT powered by battery			

Appendix A: Test results

Appendix A content

DESCRIPTION OF THE OPERATION MODES14

TEST STANDARDS VERSION APPLIED15

TEST CASES DETAILS16

 FCC 47 CFR PART 15B16

RE Radiated emission. Electromagnetic field measure16

Description of the operation modes

The operation modes described in this paragraph constitute a functionality of the sample under test for itself.
The operation modes used by the samples to which the present report refers, are shown in the following table:

Id	Description
OM/01	EUT ON. WiFi 2.4GHz, WiFi 5GHz and Bluetooth LE and Bluetooth EDR OFF. Cellular searching network. GNSS module pending to receive satellites signals. Power supply: 12Vdc

Test standards version applied

The product standards and test standards applied for each test cases are shown in the following table:

Product Test Standard	Test standard	Requirement – Test case
FCC CFR 47, Part 15, Subpart B (10-1-23 Edition) & ICES-003 Issue 7 (October 2020)	ANSI C63.4 (2014)	RE Radiated emission.
	ANSI C63.4 (2014)	CE Continuous conducted emission

Test Cases Details

FCC 47 CFR Part 15B

RE Radiated emission. Electromagnetic field measure


Limits of interference Class B

The applied limit for radiated emissions, 3 m distance, according to the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-23 Edition), Secs. 15.109 & ICES-003 Issue 7 (October 2020)


Frequency range (MHz)	FCC Part 15B		ICES-003 Issue 7		FCC Part 15B & ICES-003 Issue 7	
	QP Limit for 3 m		QP Limit for 3 m		PK Limit for 3 m	AVG Limit for 3 m
	(µV/m)	(dBµV/m)	(µV/m)	(dBµV/m)	(dBµV/m)	(dBµV/m)
30 to 88	100	40	100	40	---	---
88 to 216	150	43.5	150	43.5	---	---
216 to 230	200	46	200	46	---	---
230 to 960	200	46	224	47		
960 to 1000	500	54	500	54	---	---
Above 1000	---	---	---	---	74	54

Limits according to FCC Part 15B, are equal or more stringent than those of ICES-003 Issue 7.

Setup for measurements

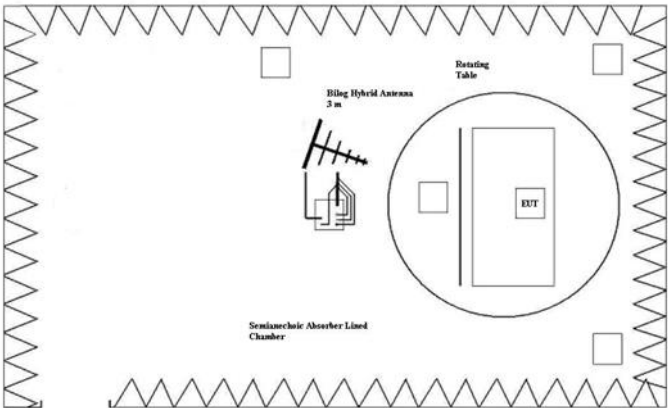

Setup for measurements < 1GHz.

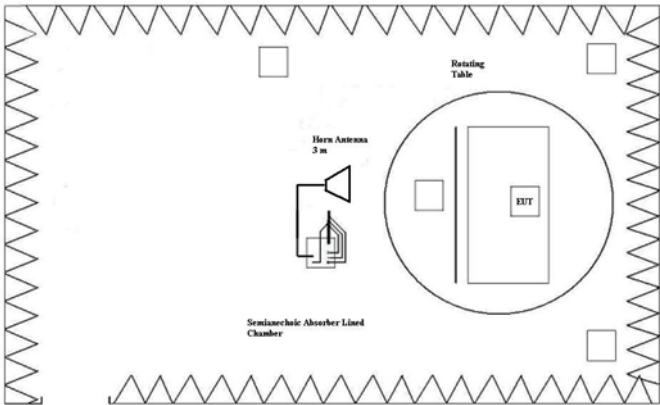

Setup for measurements > 1GHz.

Results

S/	OM	Code	Freq Rng (MHz)	V
01	OM/01	RE0101LR	[30, 1000]	P
01	OM/01	RE0101HR	[1000, 17000]	P
01	OM/01	RE0101HR2	[17000, 26000]	P

Verdict

Pass


Attachments

EMC Test Code = RE0101LR Frequency Range MHz = [30, 1000]

Sample ID: S/01

Operation Mode: OM/01

Images:

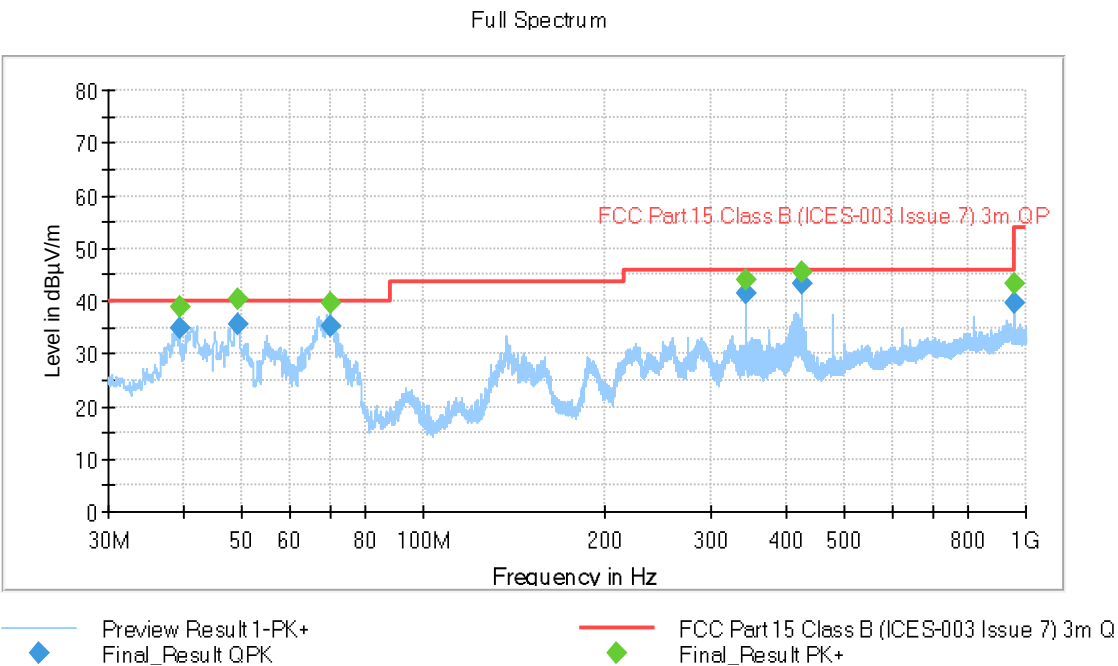

Tables:


Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
39.373000	---	38.87	---	---	114.0	V	-158.0
39.373000	34.92	---	40.00	5.08	114.0	V	-158.0
49.114000	35.45	---	40.00	4.55	115.0	V	-13.0
49.114000	---	40.23	---	---	115.0	V	-13.0
70.020000	35.38	---	40.00	4.62	100.0	V	154.0
70.020000	---	39.56	---	---	100.0	V	154.0
342.596000	---	44.15	---	---	206.0	H	119.0
342.596000	41.54	---	46.00	4.46	206.0	H	119.0
424.992000	---	45.63	---	---	150.0	H	159.0
424.992000	43.25	---	46.00	2.75	150.0	H	159.0
959.259000	---	43.36	---	---	136.0	V	-38.0
959.259000	39.76	---	46.00	6.24	136.0	V	-38.0

EMC Test Code = RE0101HR Frequency Range MHz = [1000, 17000]

Sample ID: S/01

Operation Mode: OM/01

Images:

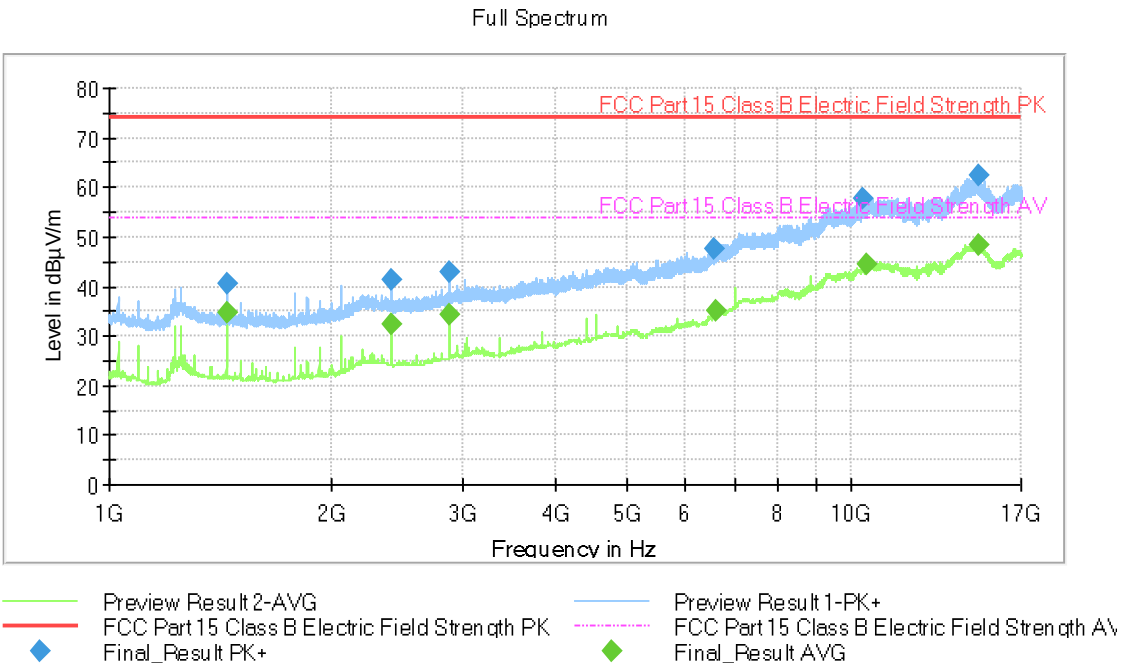

Tables:


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol
1438.750000	40.54	---	73.97	33.43	V
1439.000000	---	34.70	53.97	19.27	V
2398.000000	41.42	---	73.97	32.55	H
2398.250000	---	32.50	53.97	21.47	H
2877.750000	---	34.53	53.97	19.44	V
2877.750000	43.01	---	73.97	30.96	H
6549.500000	47.78	---	73.97	26.19	H
6597.000000	---	35.18	53.97	18.79	V
10398.500000	57.61	---	73.97	16.36	H
10516.750000	---	44.49	53.97	9.48	H
14861.500000	---	48.50	53.97	5.47	V
14884.000000	62.52	---	73.97	11.45	V

EMC Test Code = RE0101HR2 Frequency Range MHz = [17000, 26000]

Sample ID: S/01

Operation Mode: OM/01

Images:

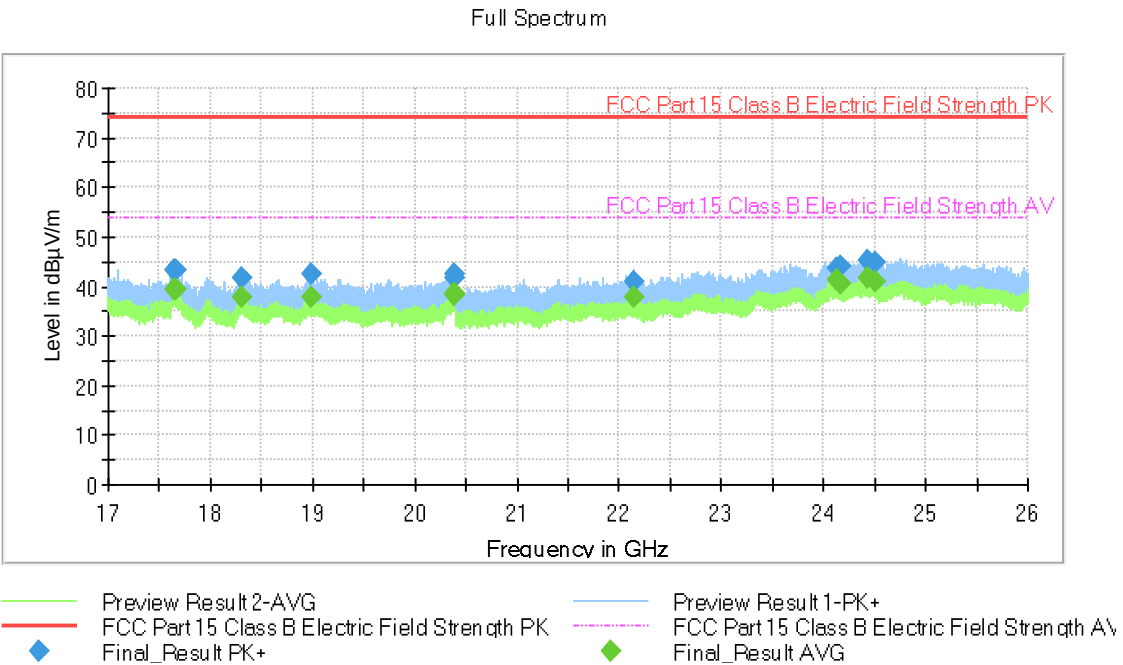

Tables:

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol
17635.062500	---	39.52	53.97	21.45	H
17635.062500	43.15	---	73.97	30.82	H
17654.468750	43.14	---	73.97	30.83	H
17654.468750	---	39.45	53.97	21.52	H
18303.875000	41.69	---	73.97	32.28	V
18303.875000	---	37.93	53.97	23.04	V
18992.937500	42.48	---	73.97	31.49	H
18992.937500	---	37.72	53.97	23.25	H
20383.718750	---	38.42	53.97	22.55	H
20383.718750	42.62	---	73.97	31.35	H
20391.875000	---	38.72	53.97	22.25	H
20391.875000	41.64	---	73.97	32.33	H
22147.437500	40.89	---	73.97	33.08	V
22147.437500	---	37.72	53.97	23.25	V
24119.562500	---	41.28	53.97	19.69	H
24119.562500	43.81	---	73.97	30.16	H
24160.062500	44.23	---	73.97	29.74	H
24160.062500	---	40.58	53.97	20.39	H
24436.250000	---	41.66	53.97	19.31	V
24436.250000	45.33	---	73.97	28.64	V
24509.937500	---	41.14	53.97	19.83	V
24509.937500	44.77	---	73.97	29.20	V