

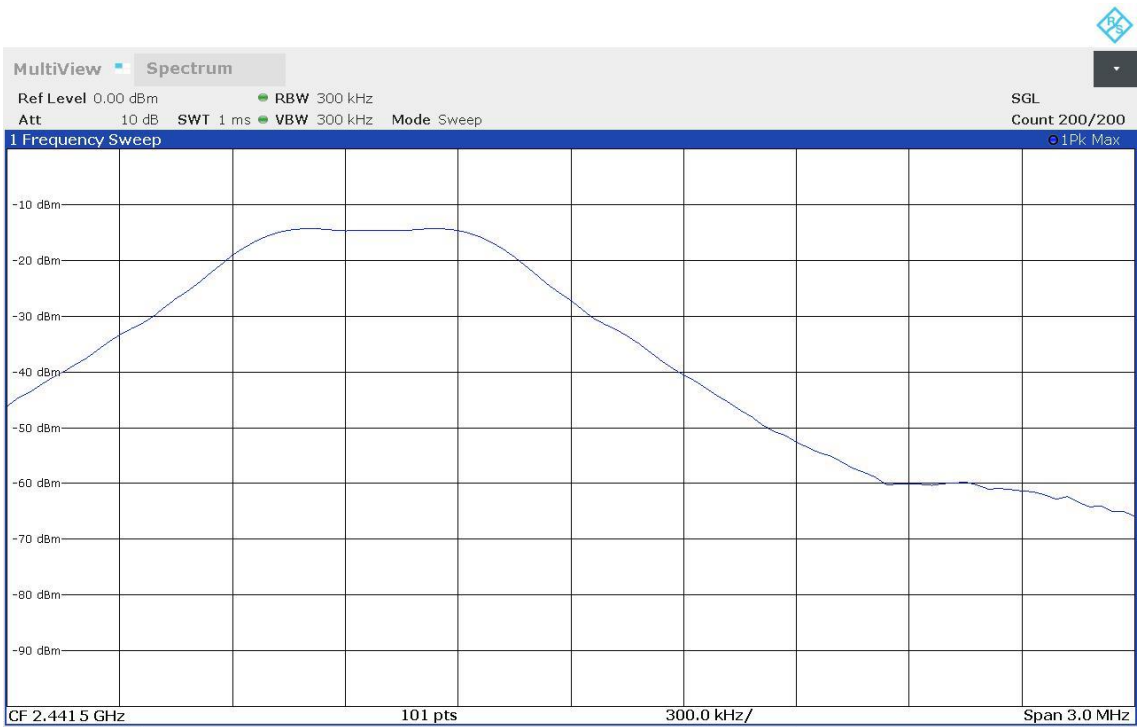


Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Antenna configuration = SISO
Active Port = 1



Images:

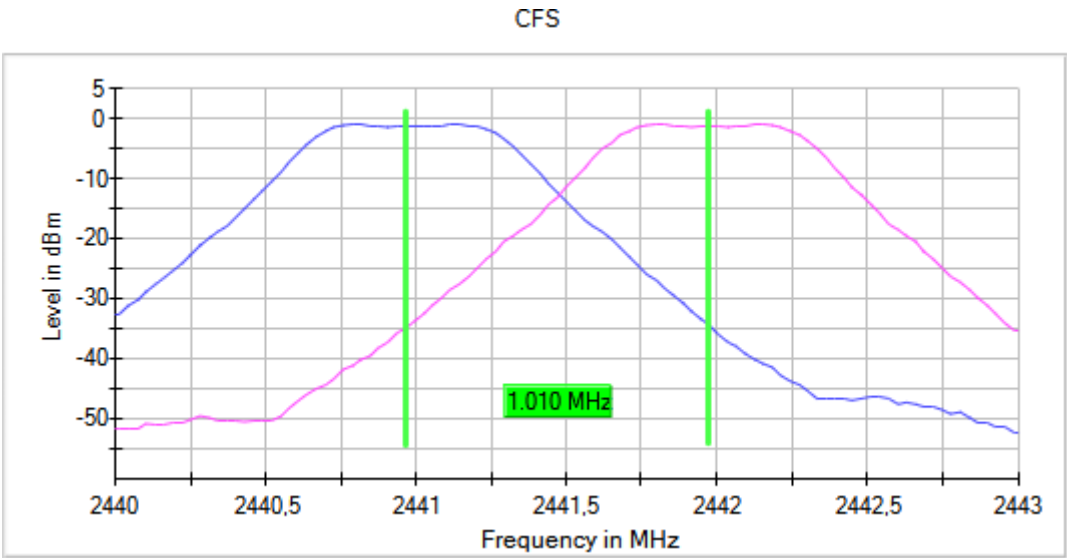


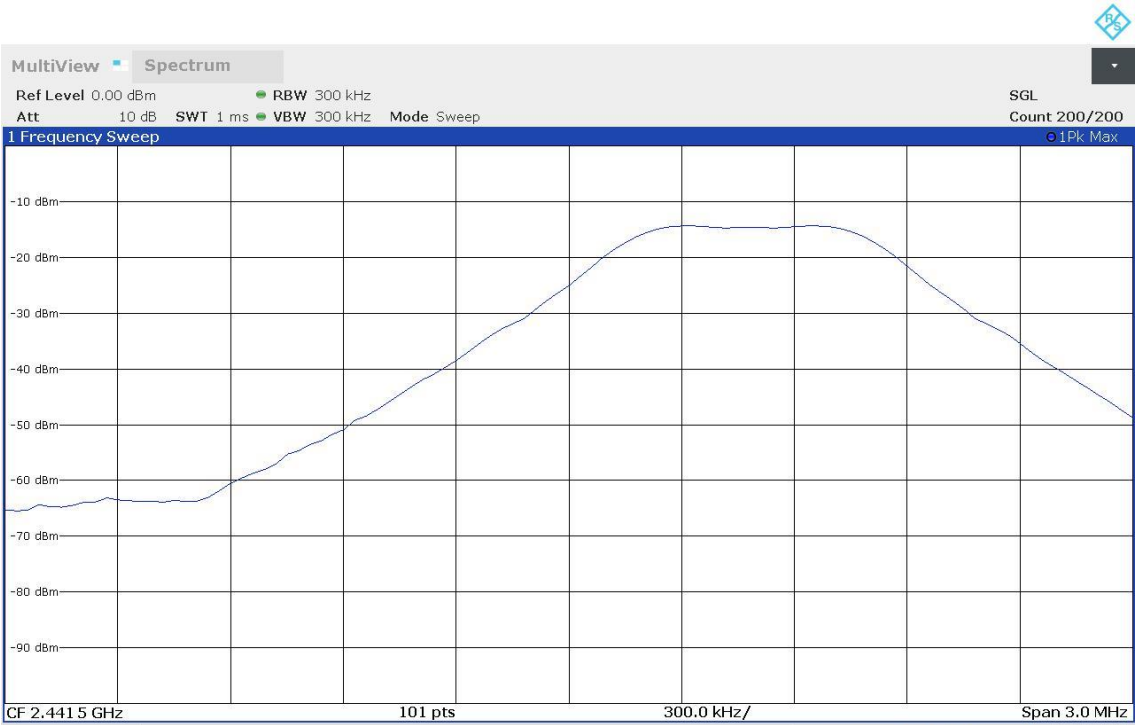

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Antenna configuration = SISO
Active Port = 1



Images:

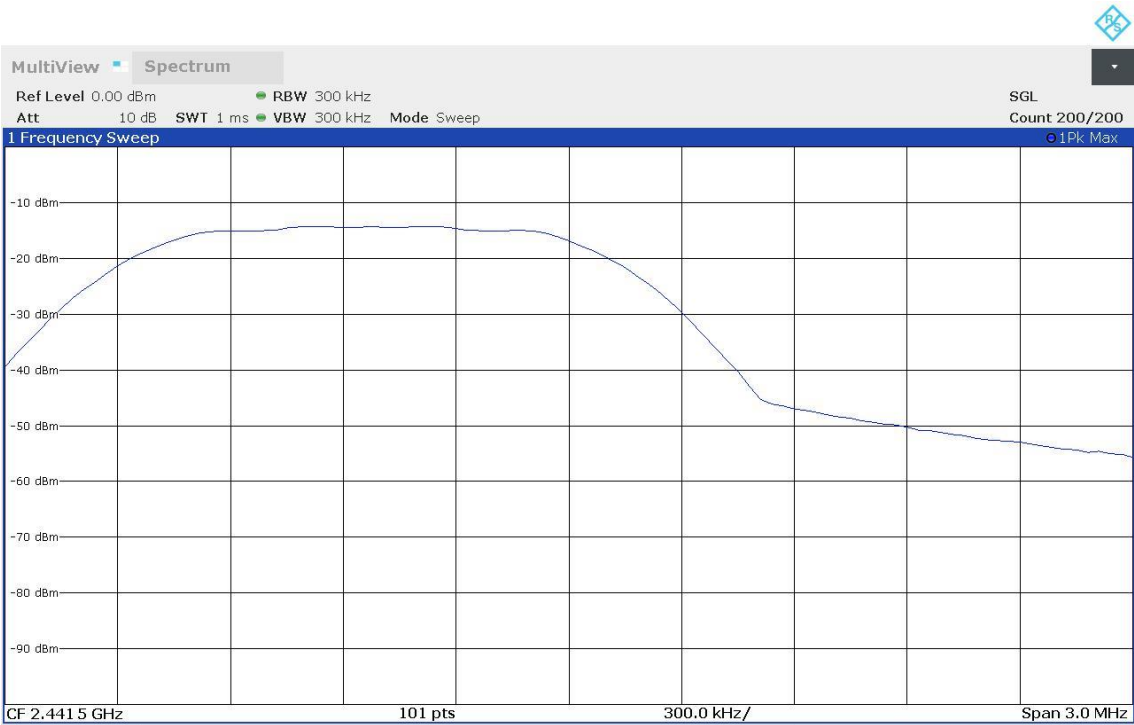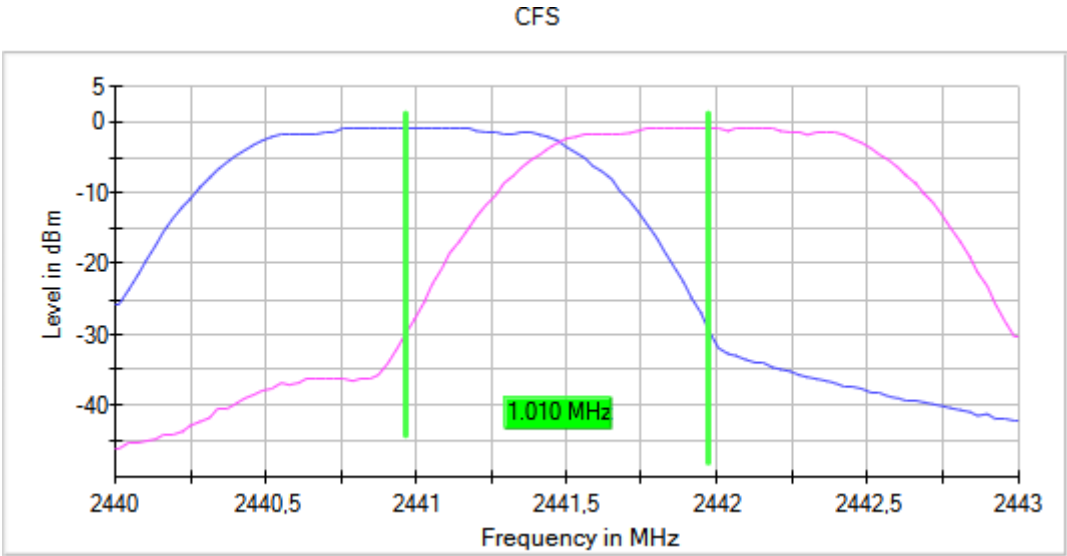


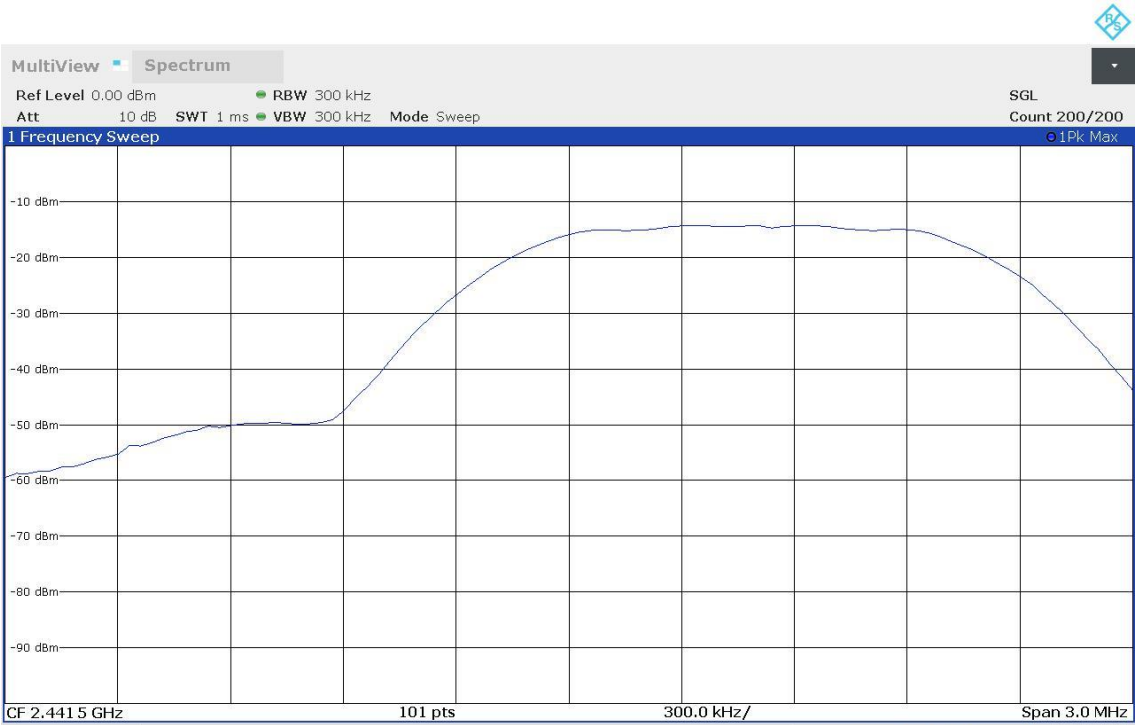

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Antenna configuration = SISO
Active Port = 1

Images:

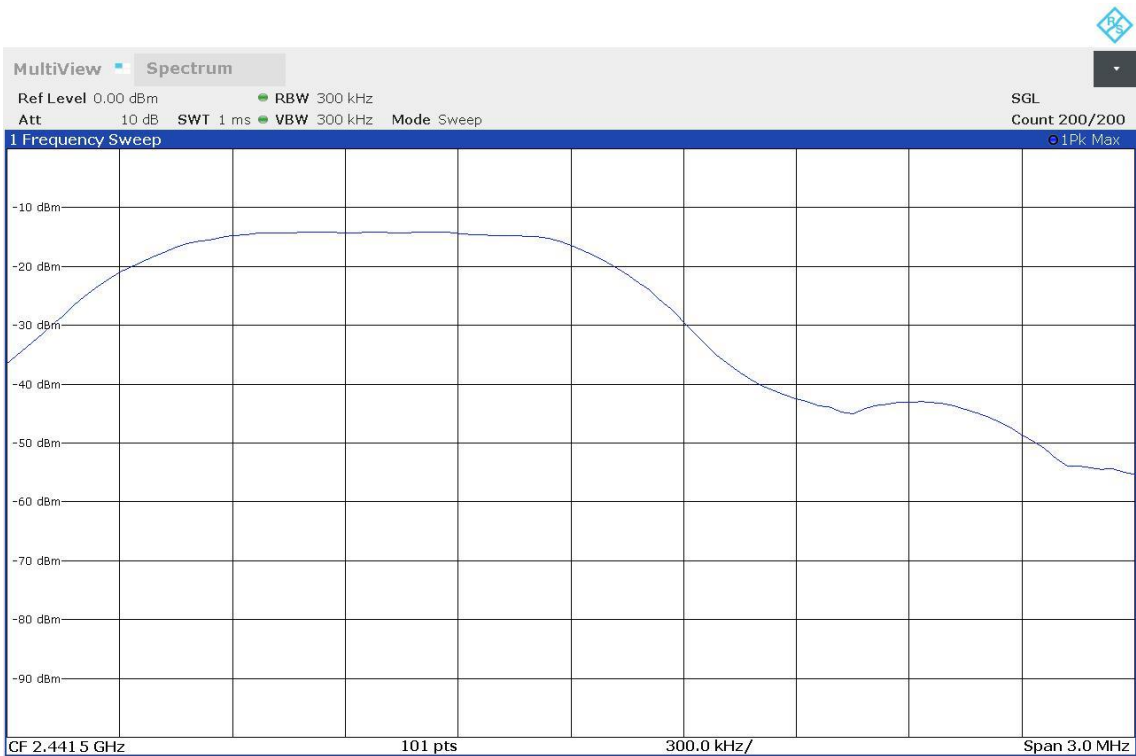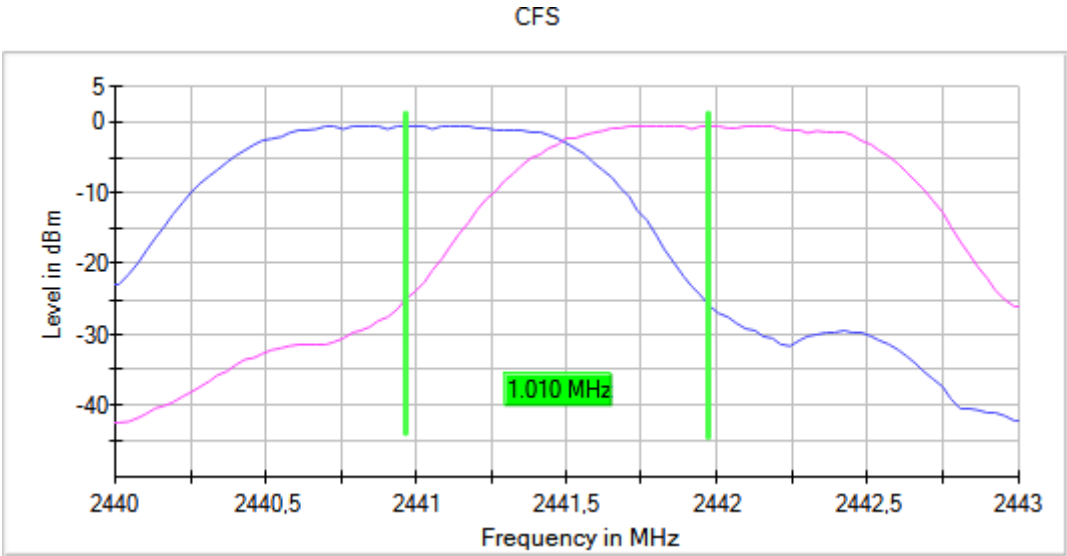

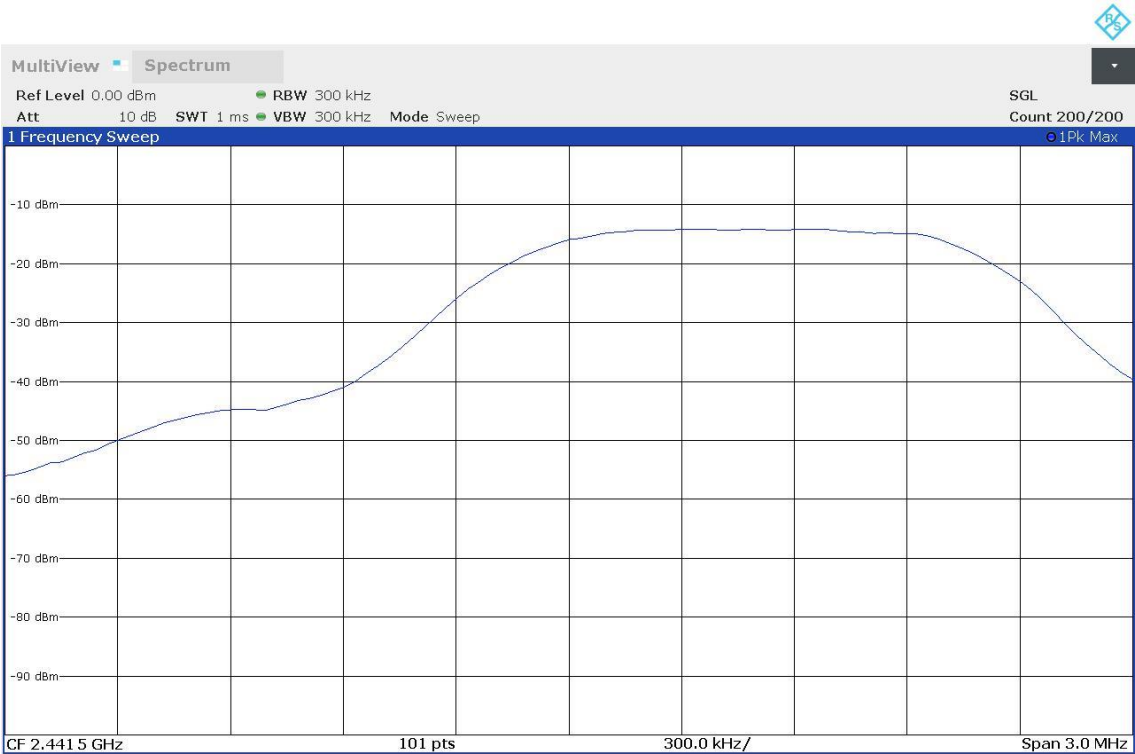

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time)

Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = 0.4 x 79= 31.6 seconds.

Modulation: BT (GFSK)

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	7	23.12

Modulation: BT (Pi/4 DQPSK)

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	4	13.46

Modulation: BT (8DPSK)

Results

Equipment	BW (MHz)	Port	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	7	21.83



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Antenna configuration = SISO
Active Port = 1

Images:

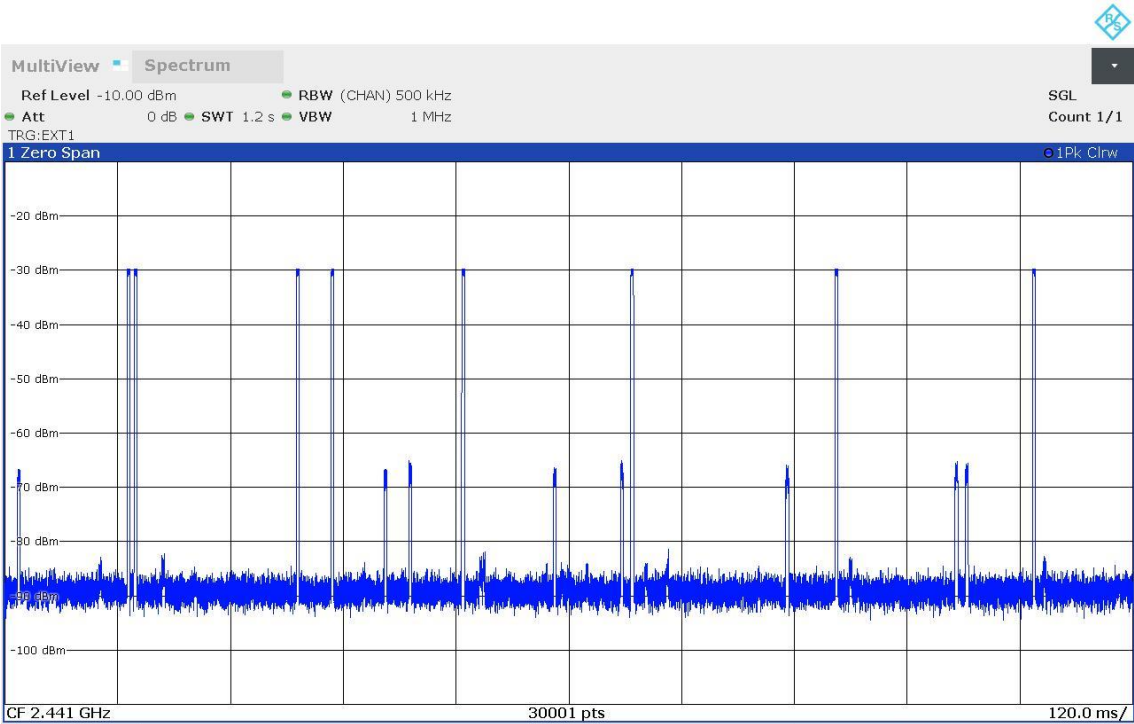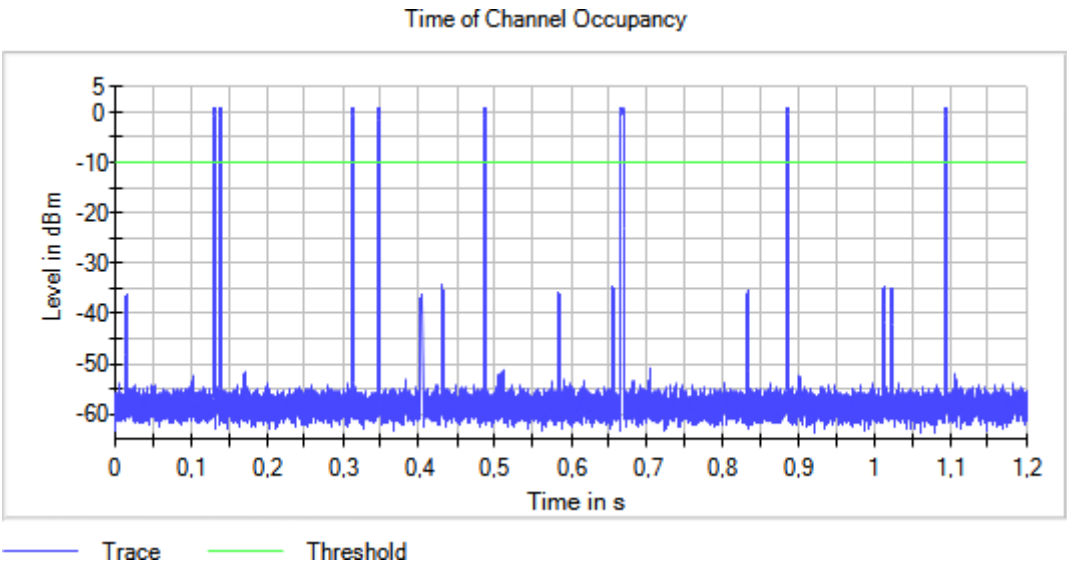



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Antenna configuration = SISO
Active Port = 1

Images:

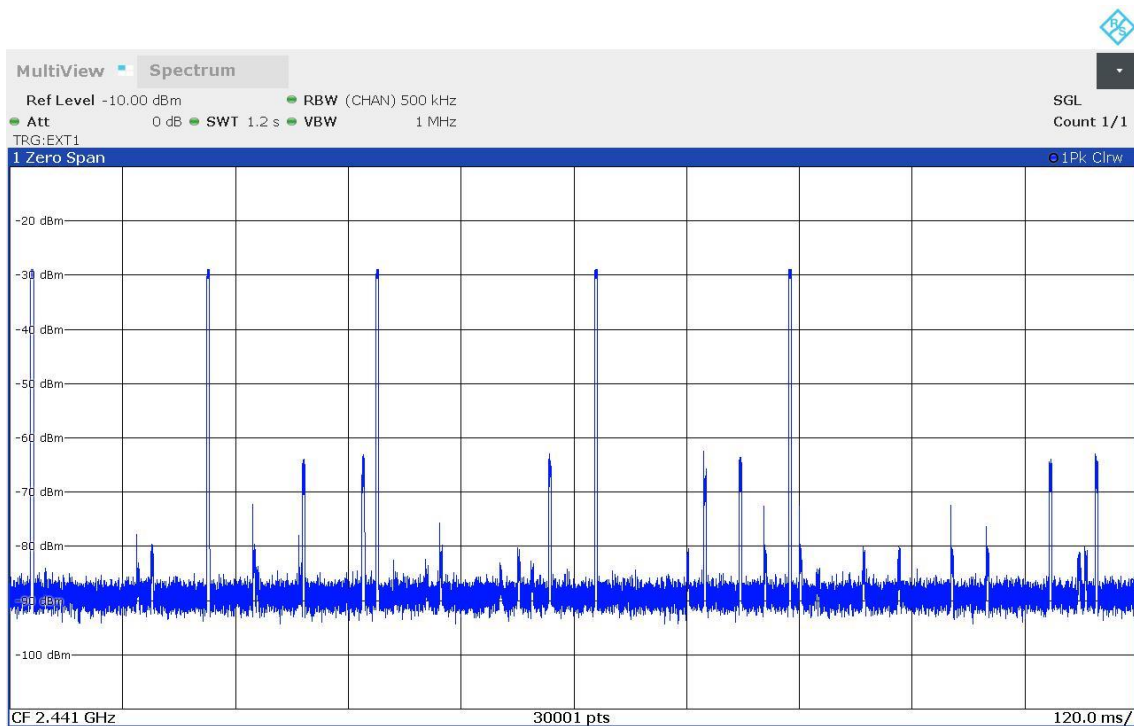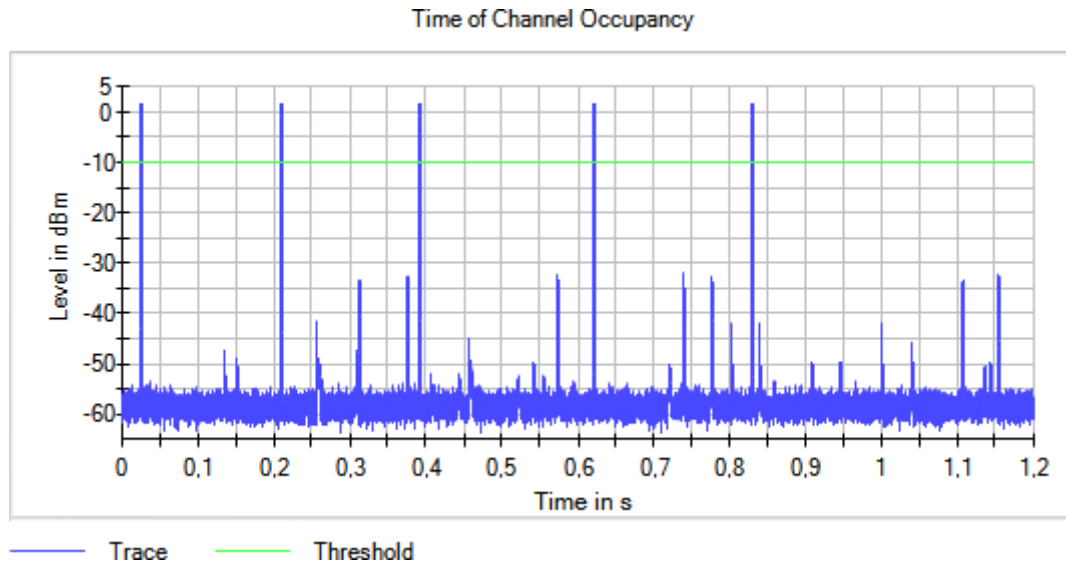

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Antenna configuration = SISO
Active Port = 1

Images:

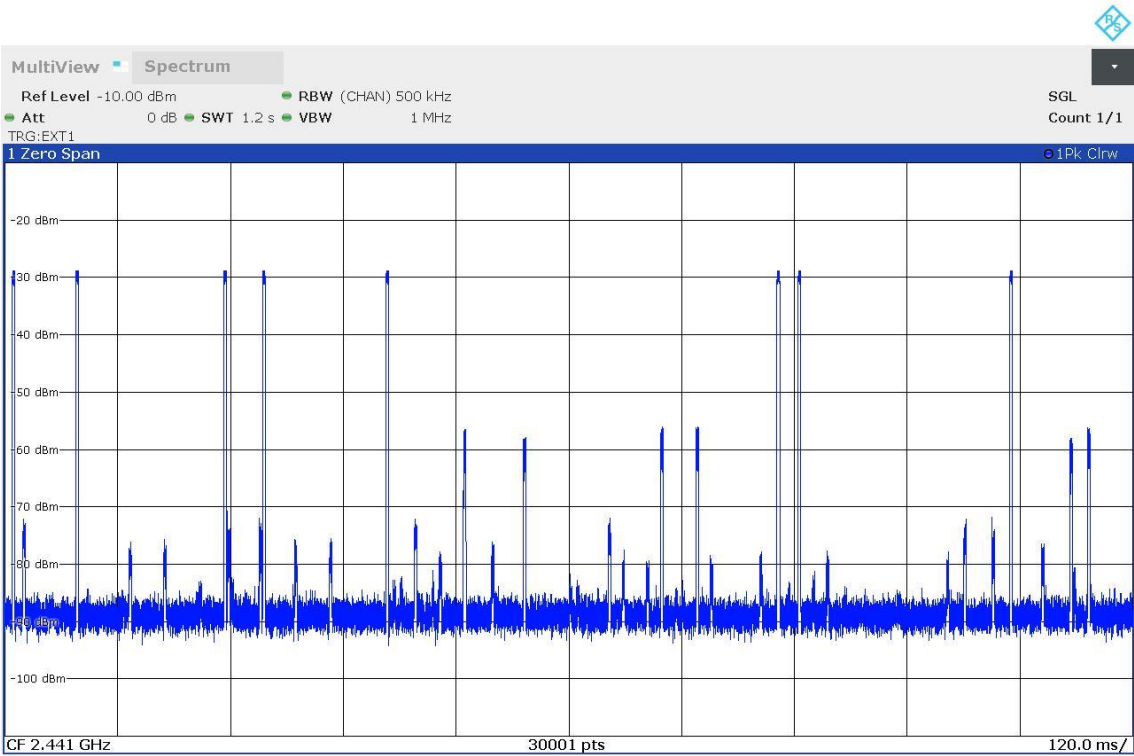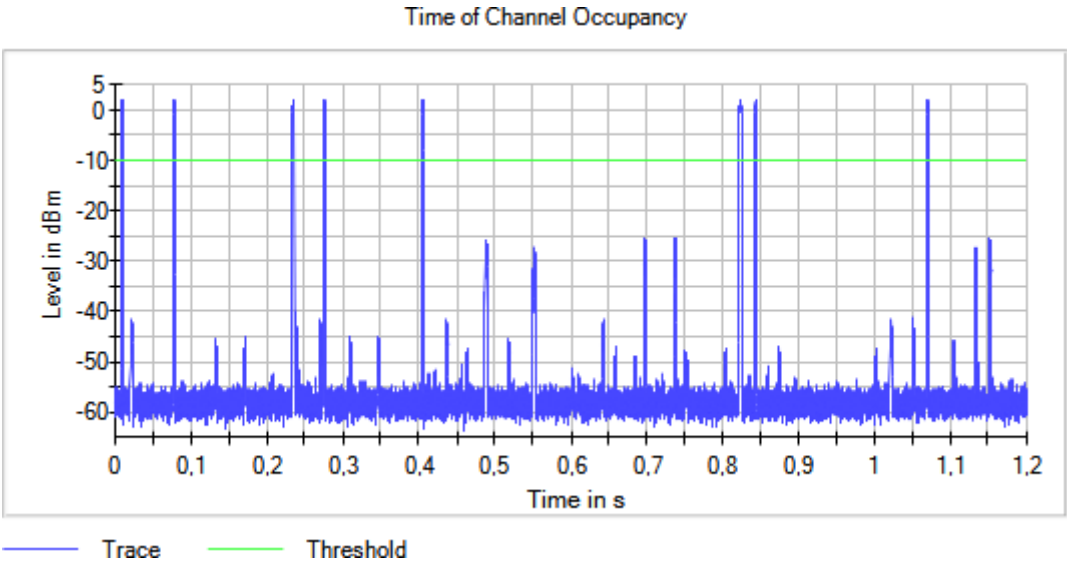

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK)

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Modulation: BT (Pi/4 DQPSK)

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Modulation: BT (8DPSK)

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	82



Verdict

Pass

Attachments



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Antenna configuration = SISO
Active Port = 1

Images:

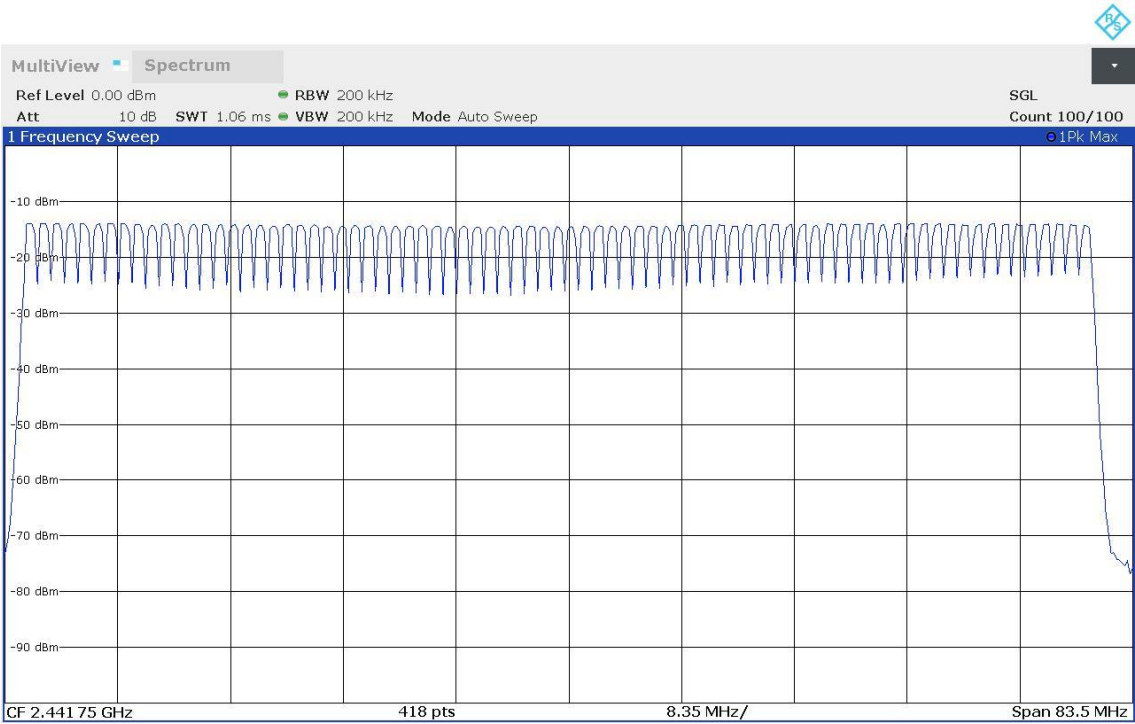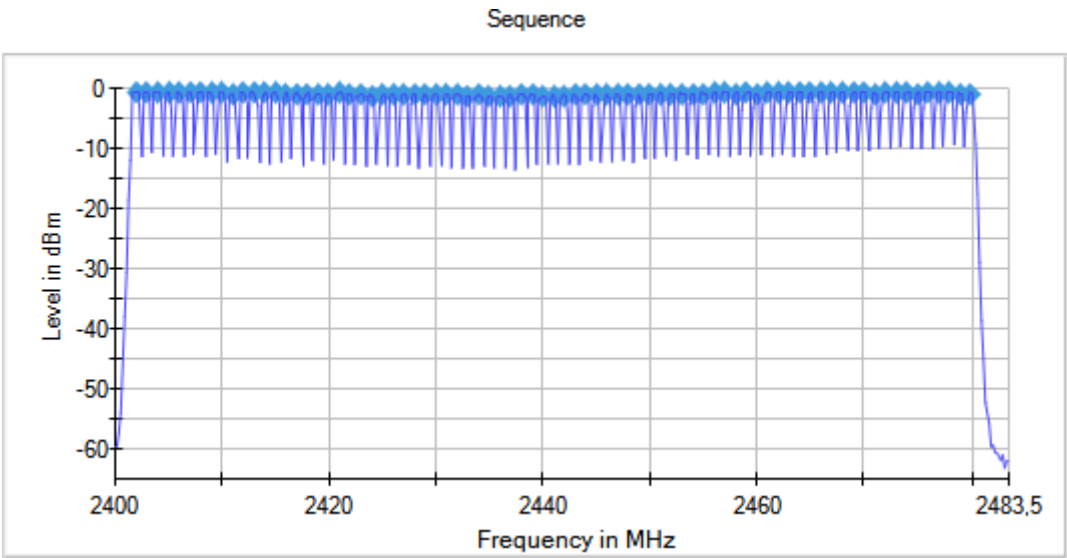



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Antenna configuration = SISO
Active Port = 1

Images:

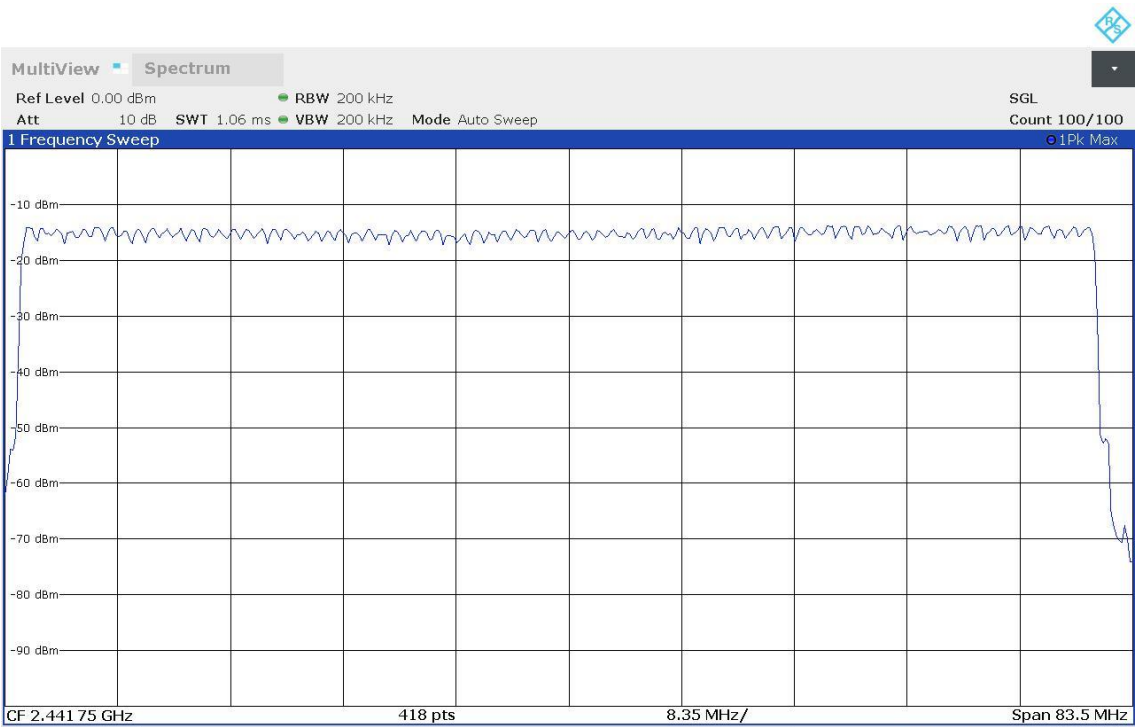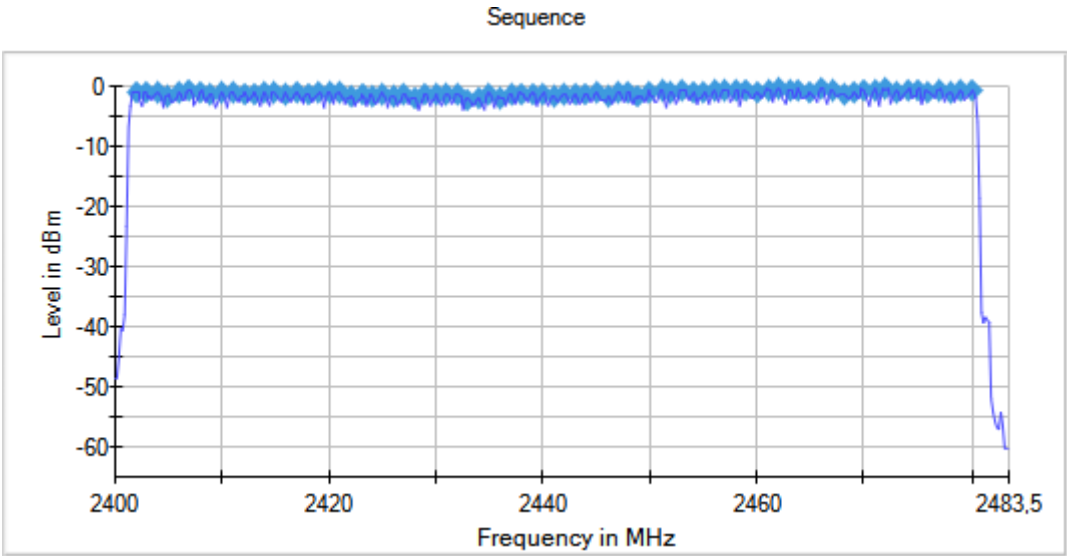

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Antenna configuration = SISO
Active Port = 1

Images:

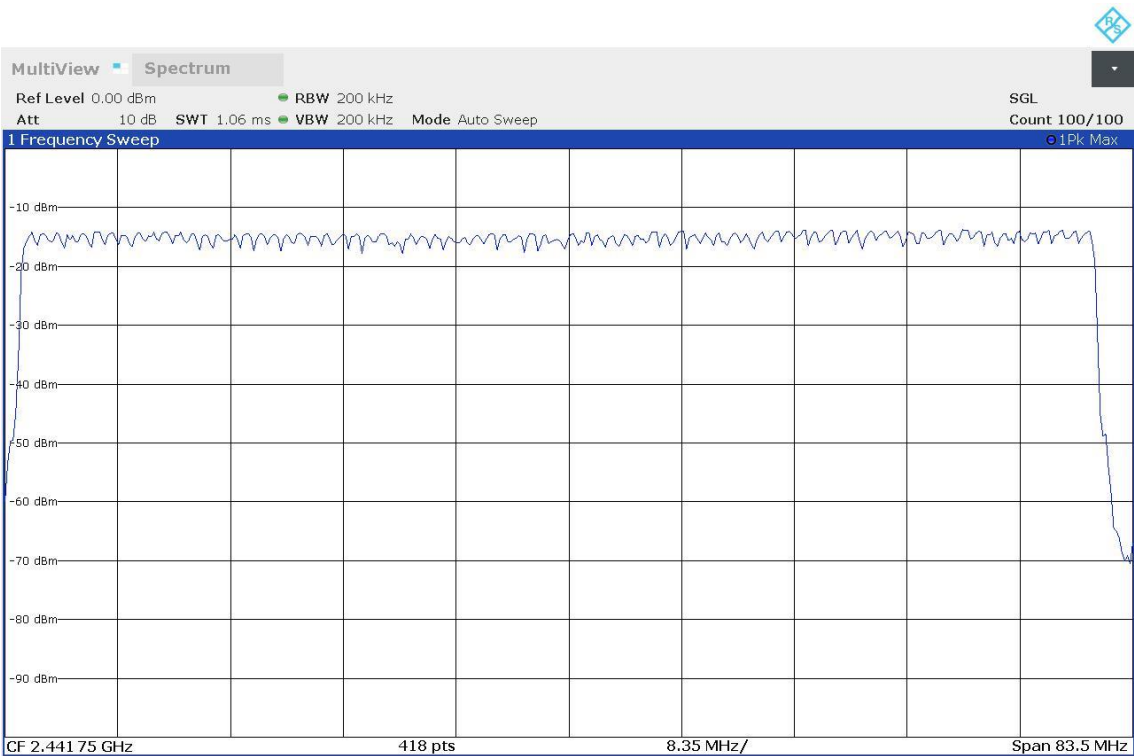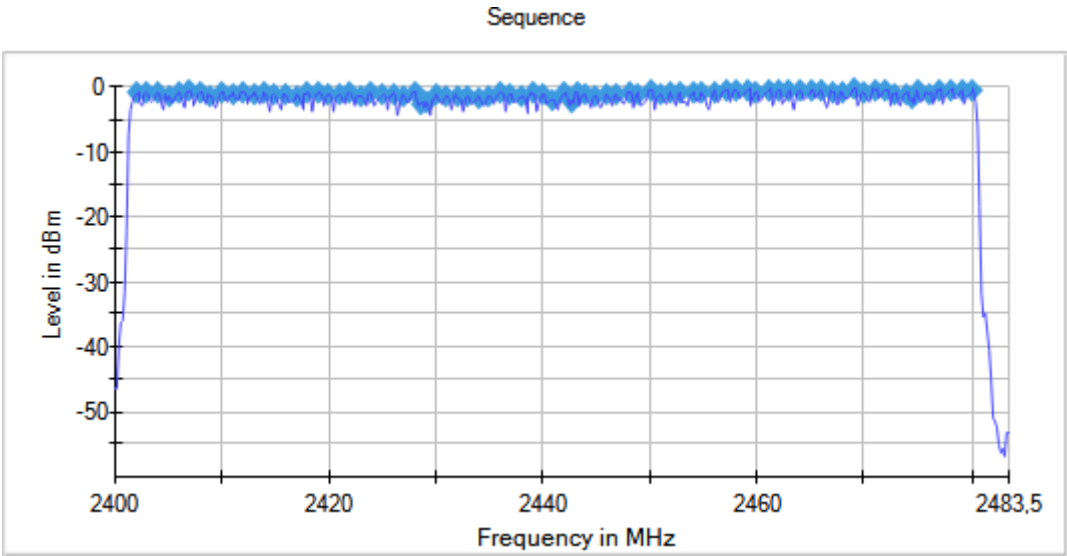

RSS-247 5.4 (b) / FCC 15.247 (b) (1) Maximum Peak Conducted output power

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RSS-247:

The e.i.r.p. shall not exceed 4 W (RSS-247).

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 "Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices" of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Modulation: BT (GFSK)

Results

Equipment	Freq (MHz)	Peak Power (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	-0.4890	-0.3790
	2441.00000	-1.0240	-0.9140
	2480.00000	-0.6860	-0.5760

Modulation: BT (Pi/4 DQPSK)

Results

Equipment	Freq (MHz)	Peak Power (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1.4720	1.5820
	2441.00000	1.2150	1.3250
	2480.00000	1.6930	1.8030

Modulation: BT (8DPSK)

Results

Equipment	Freq (MHz)	Peak Power (dBm)	EIRP (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1.8580	1.9680
	2441.00000	1.6490	1.7590
	2480.00000	2.1120	2.2220



Verdict

Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

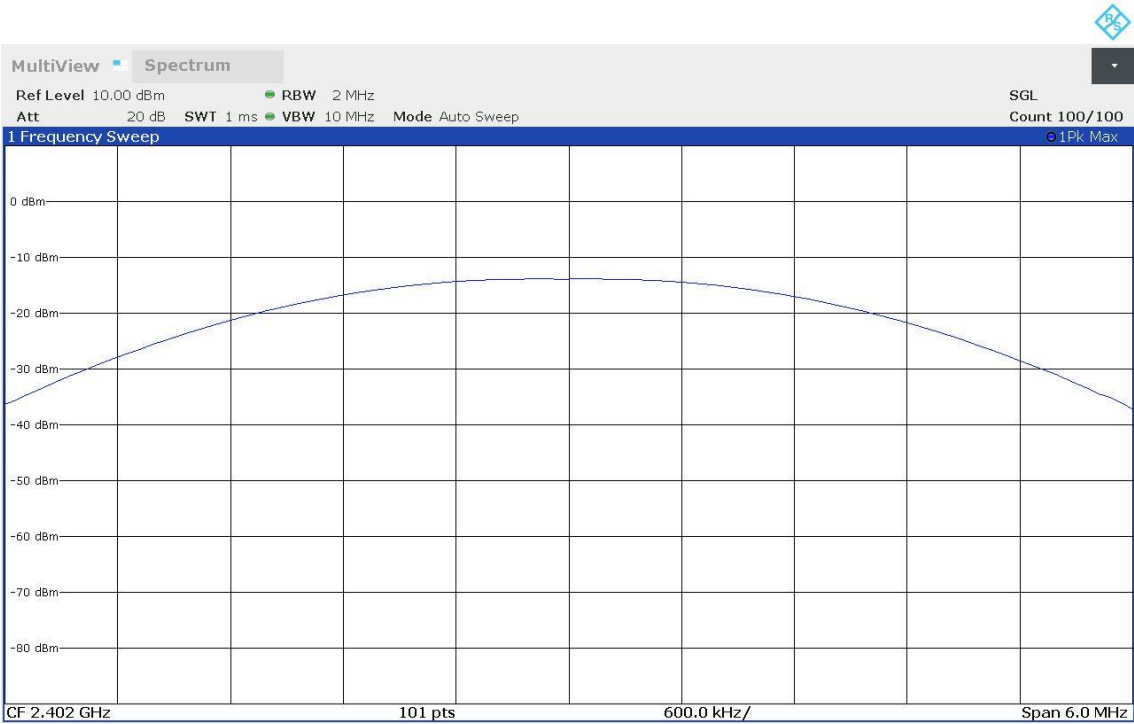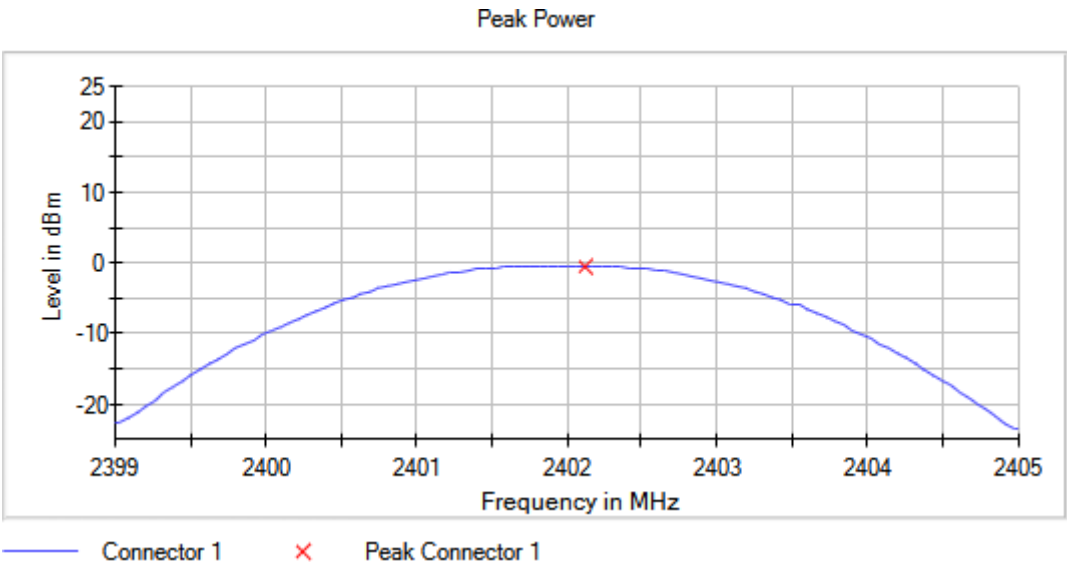



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

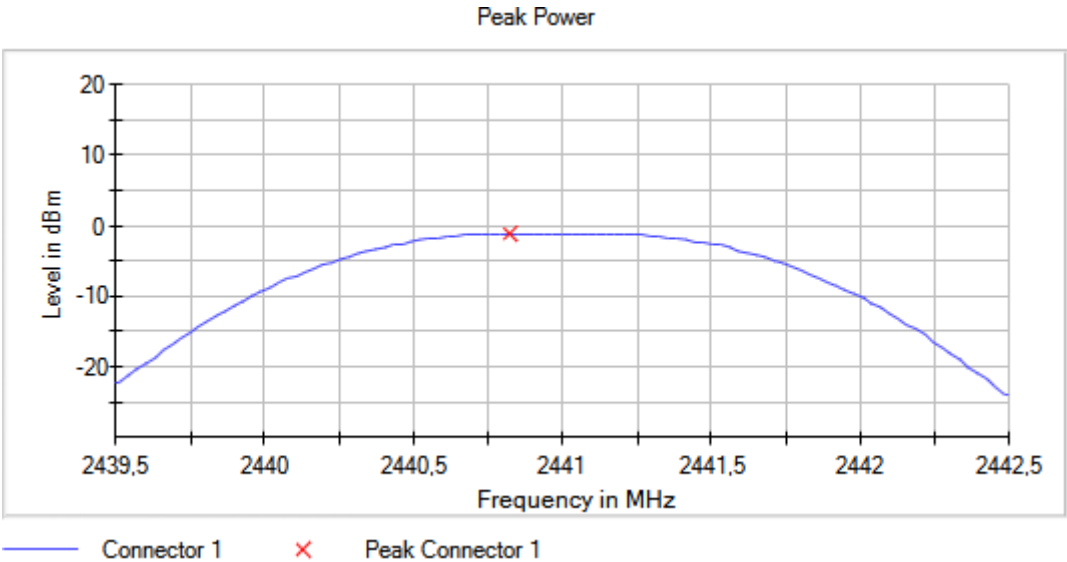



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

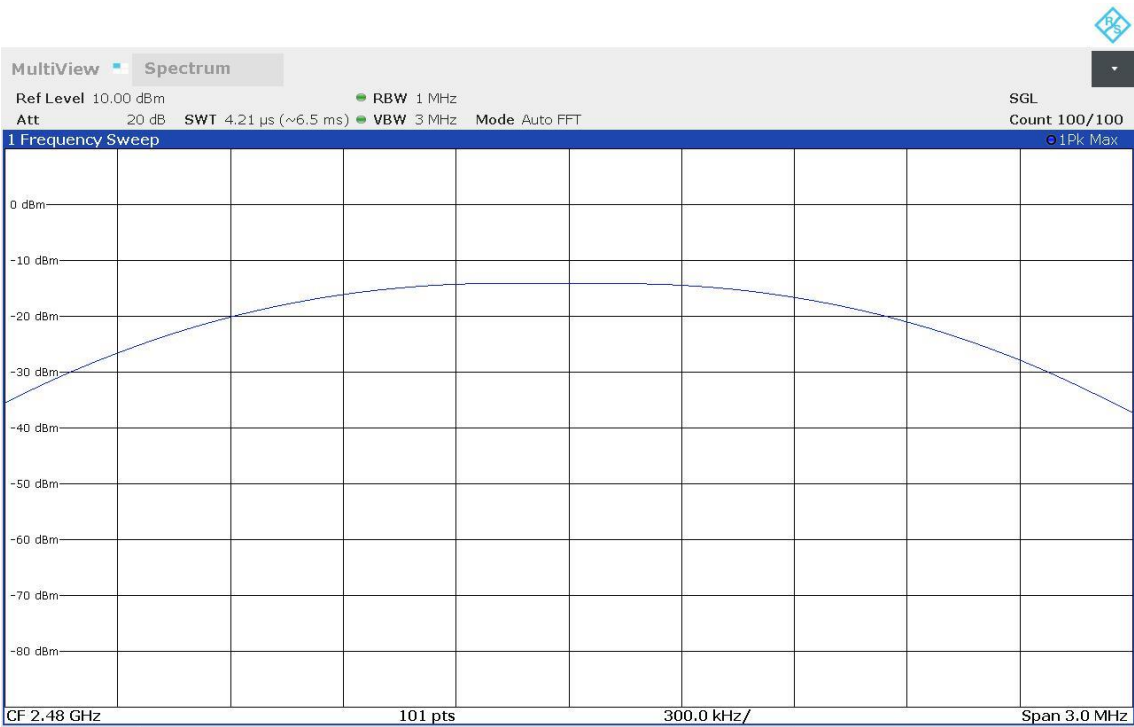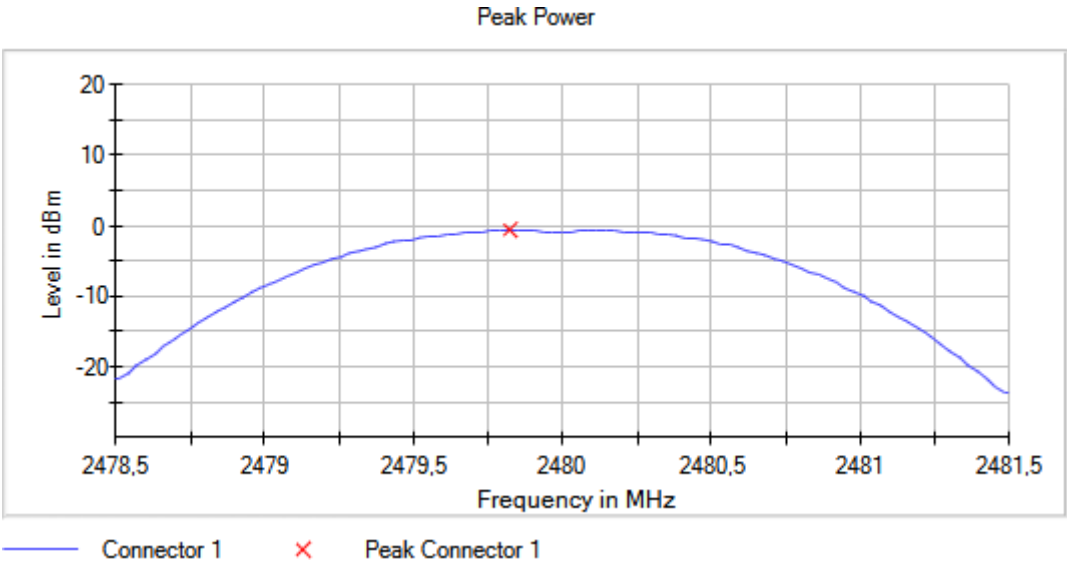



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

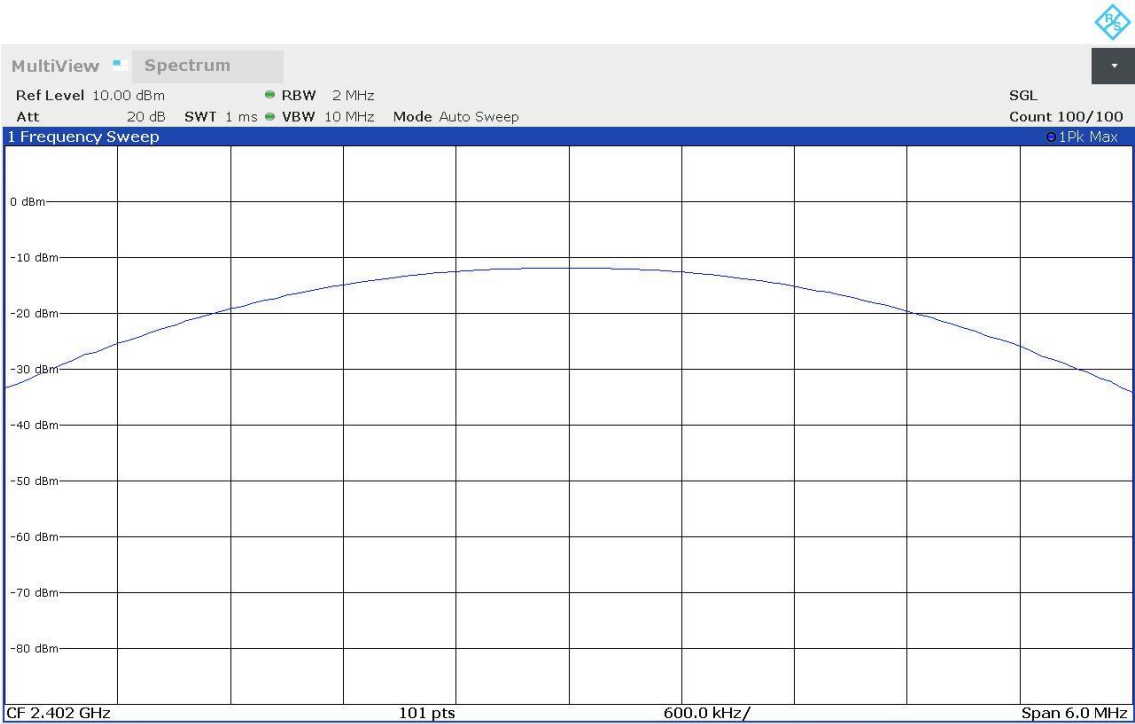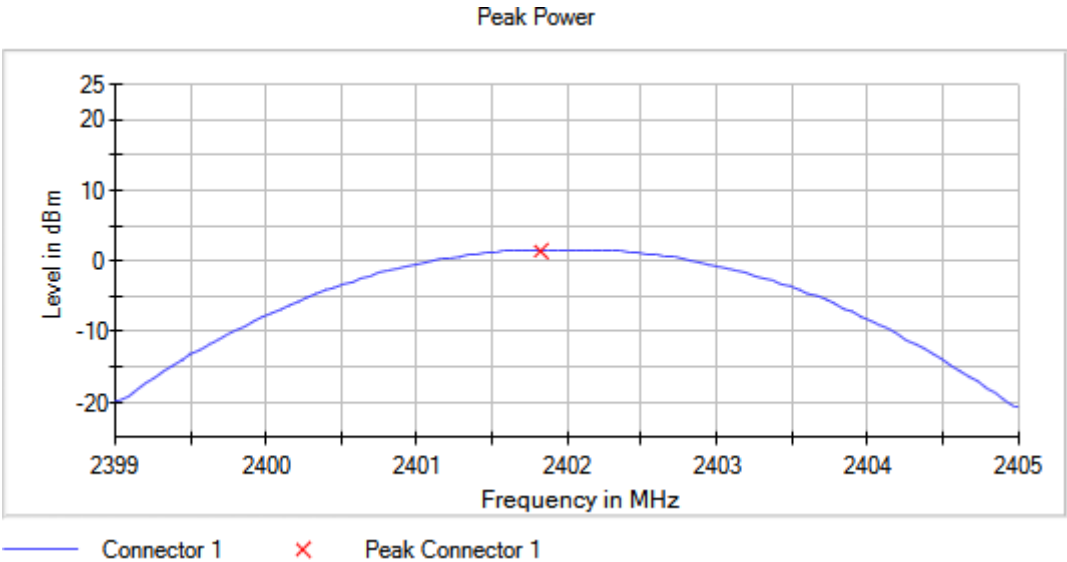



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

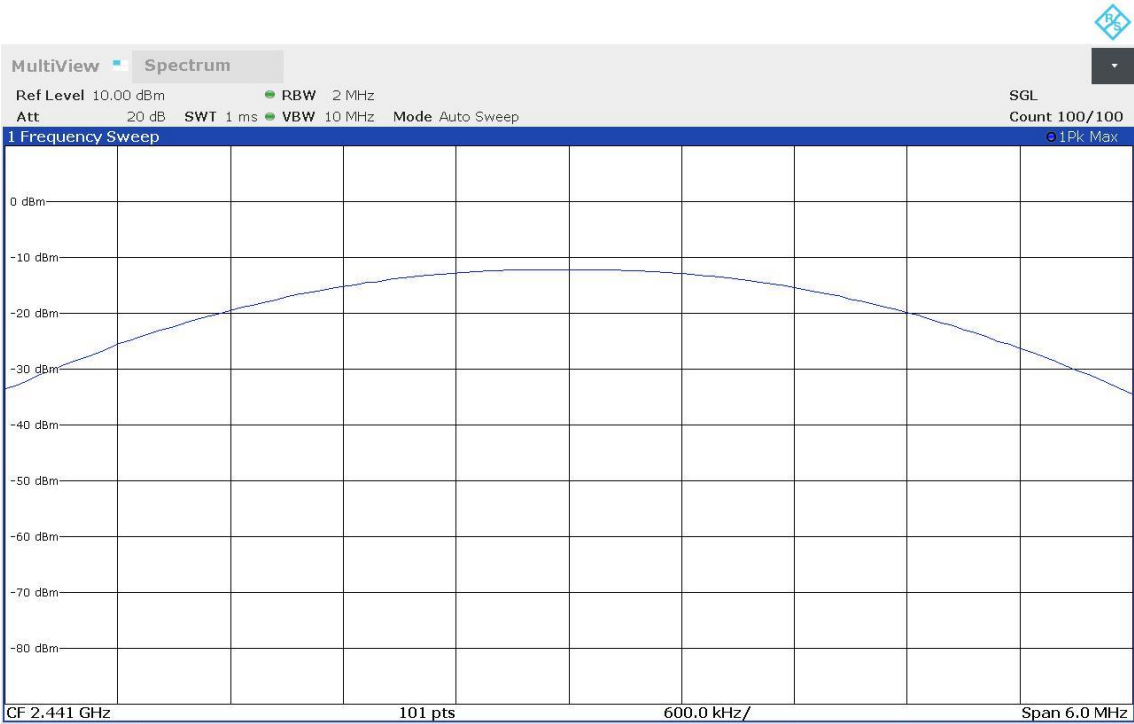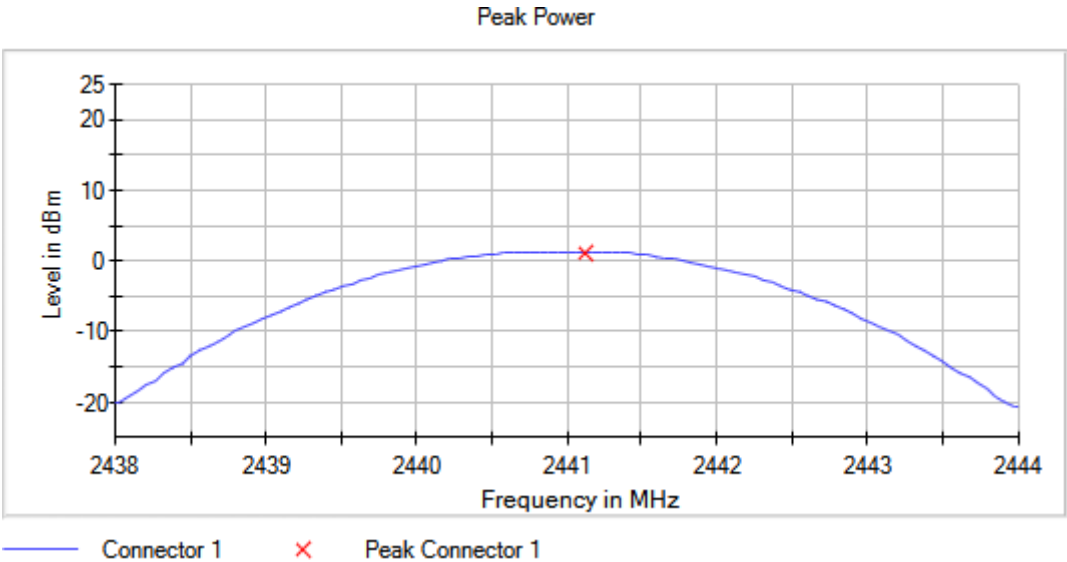



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

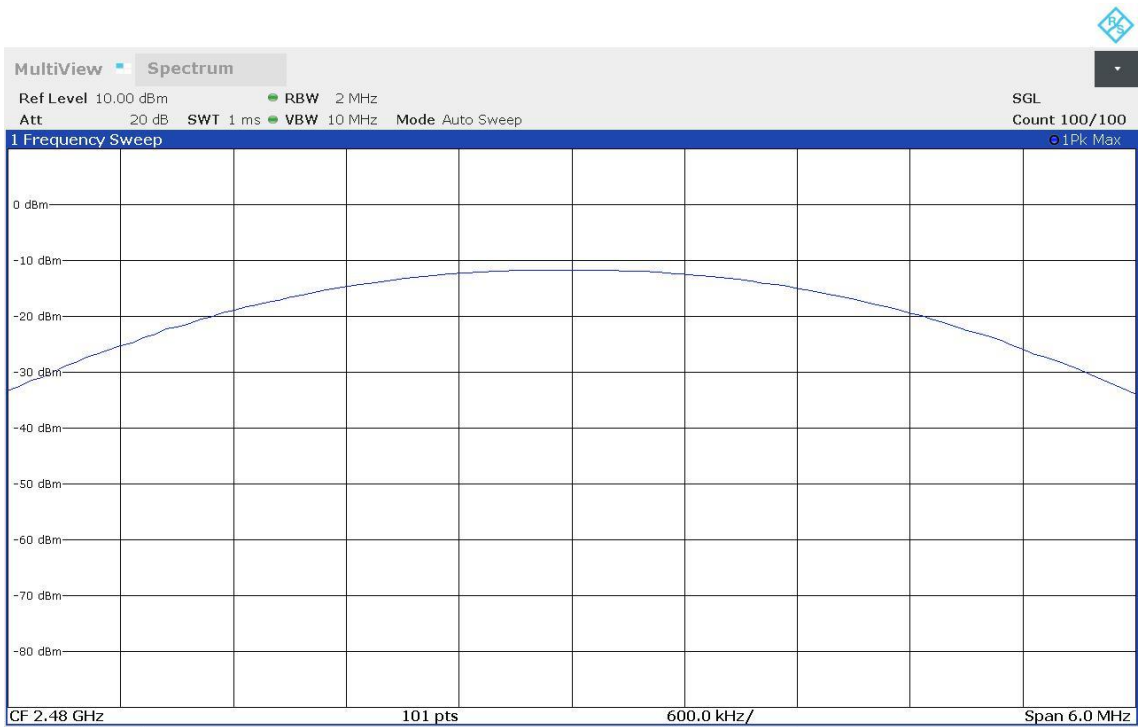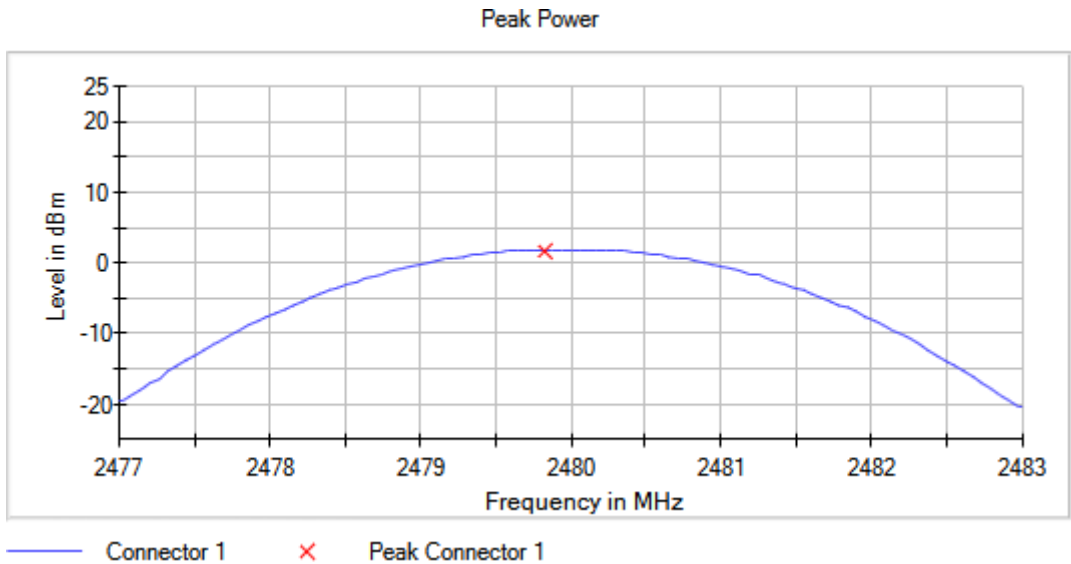



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

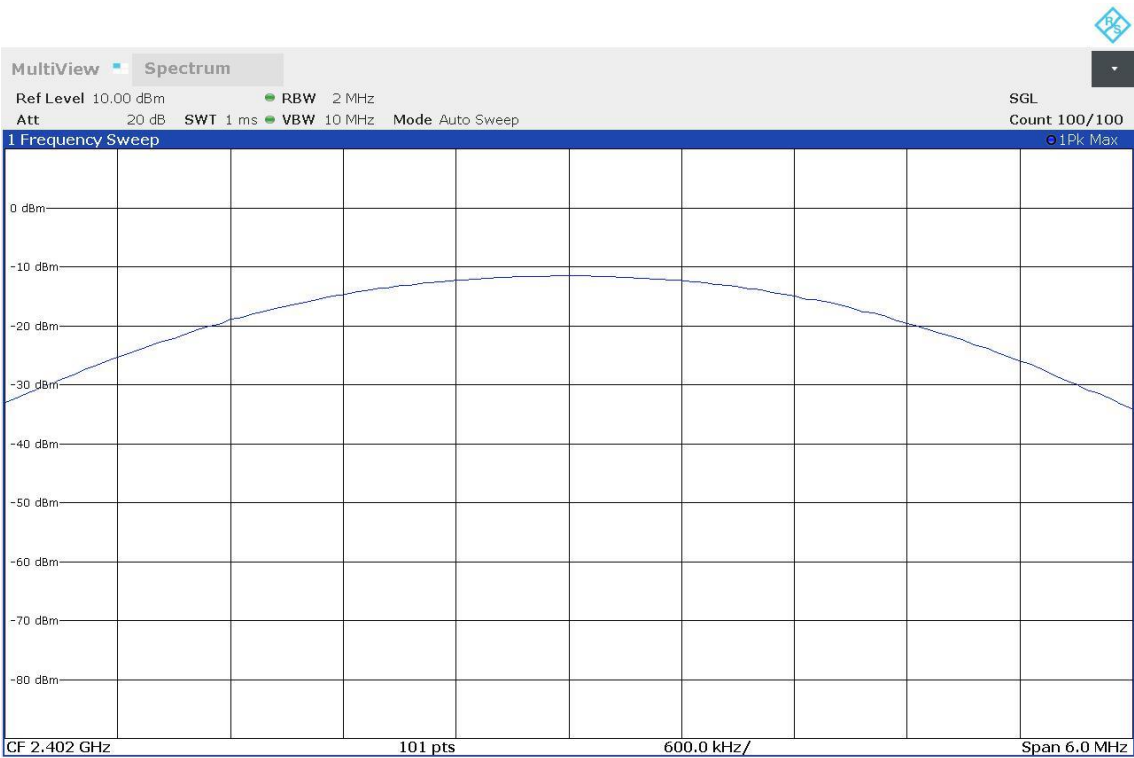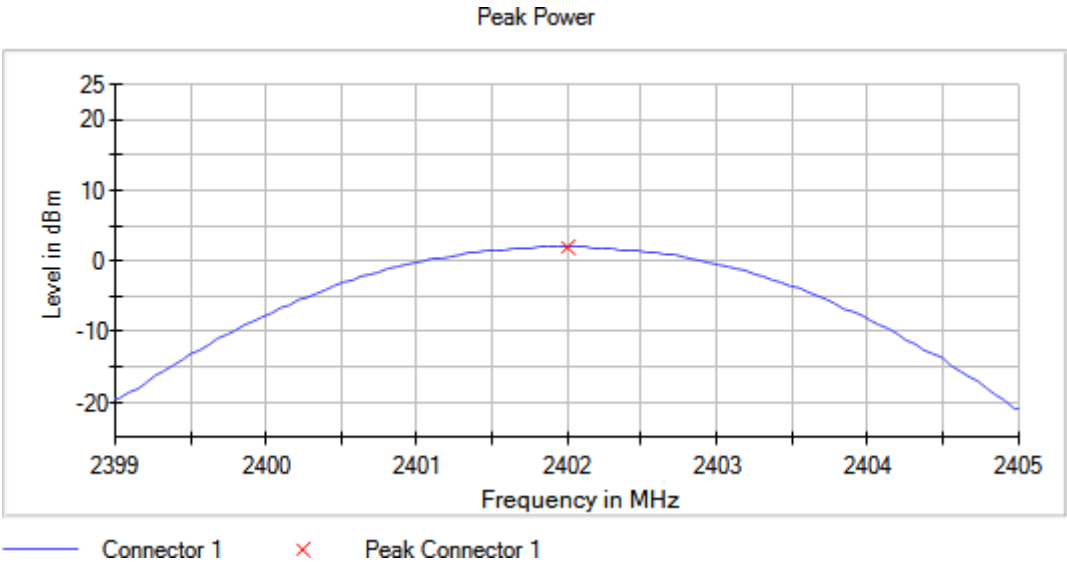



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1

Images:

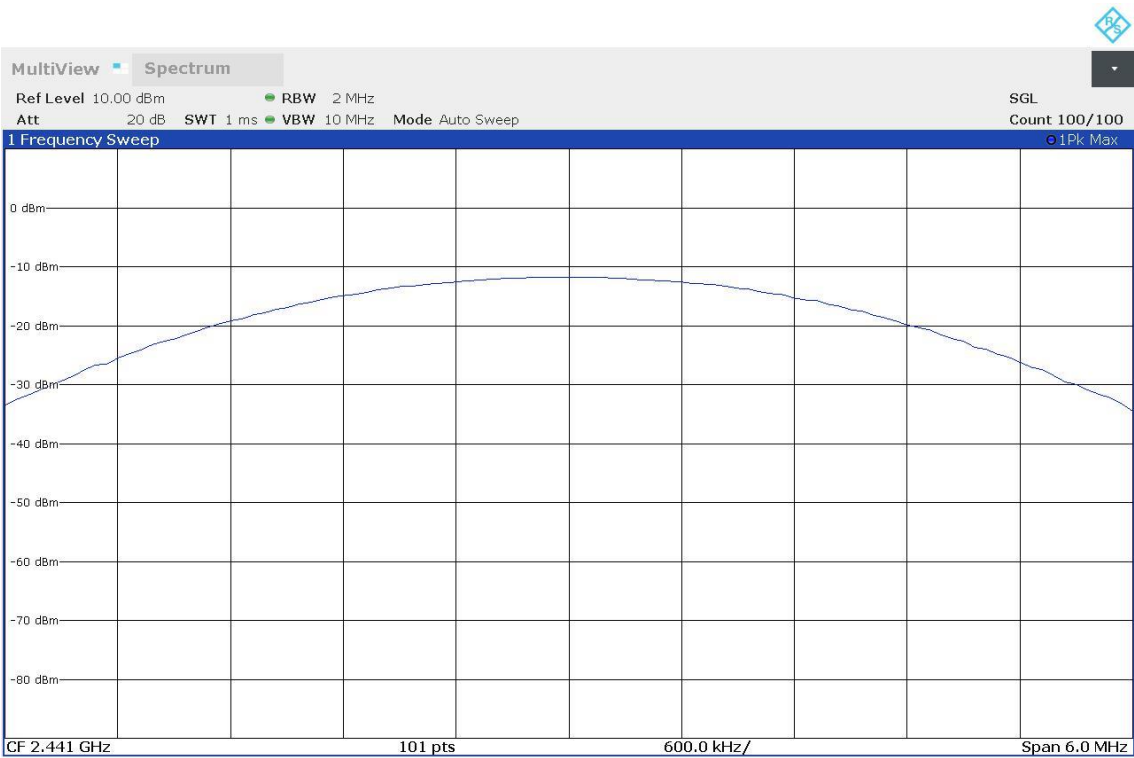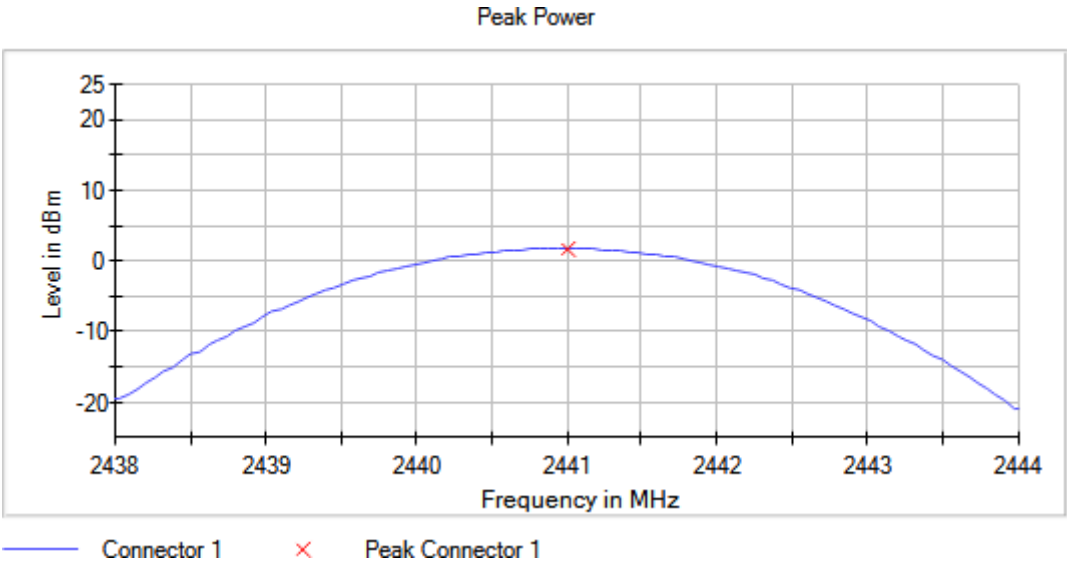

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

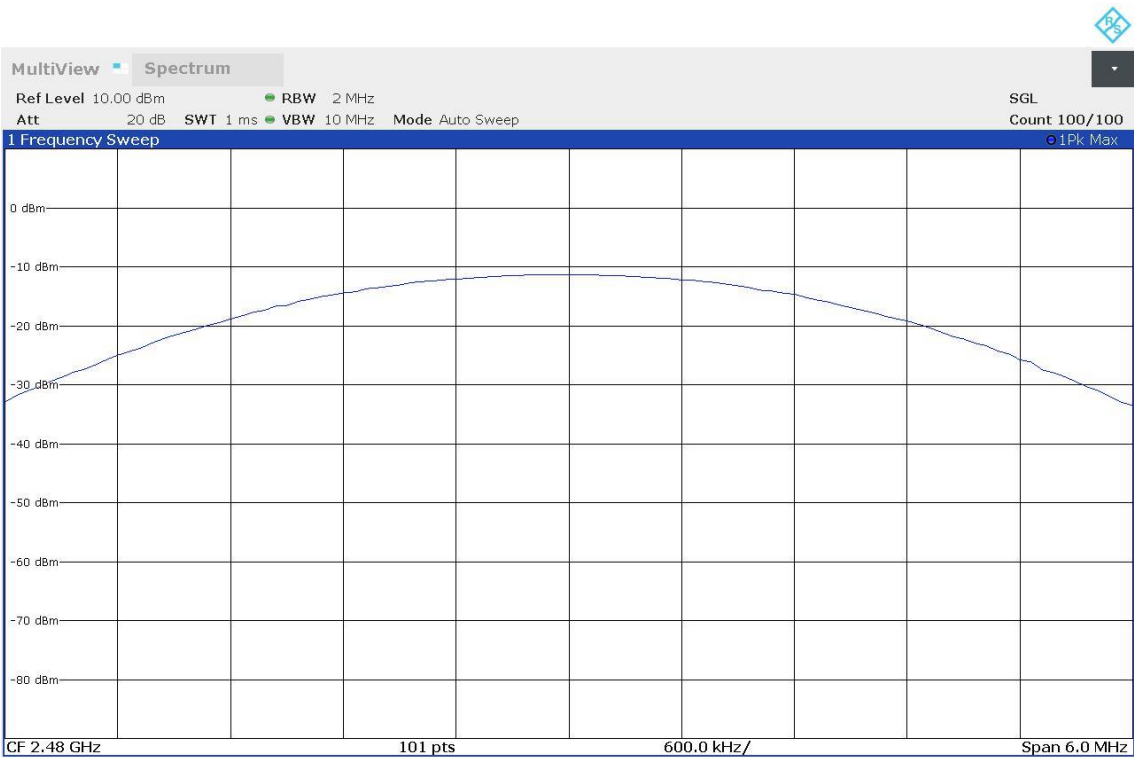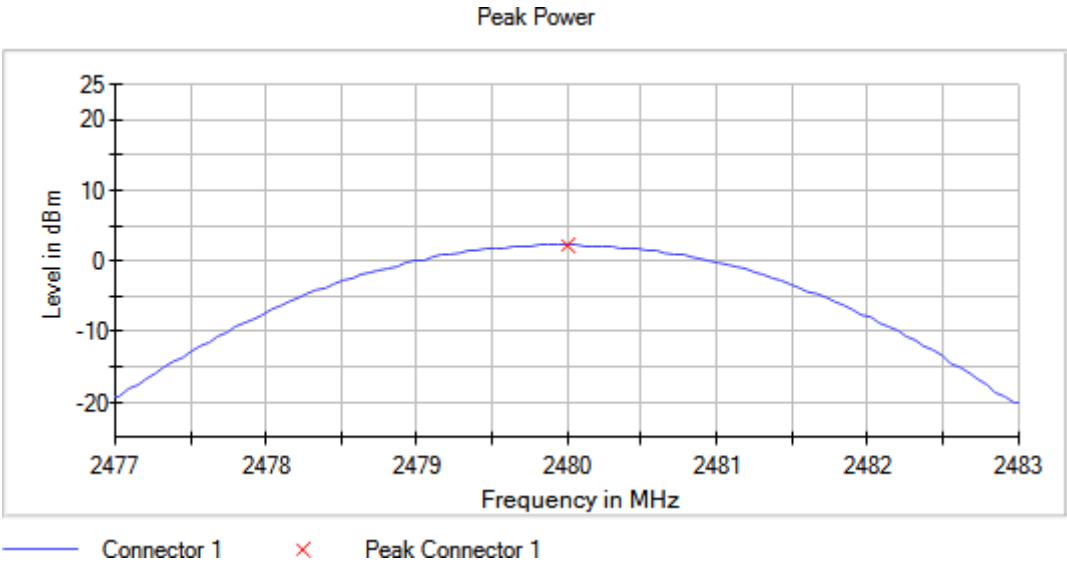

RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: BT (GFSK)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Modulation: BT (Pi/4 DQPSK)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Modulation: BT (8DPSK 3-DH5)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK)
Antenna configuration = SISO Active Port = 1

Images:

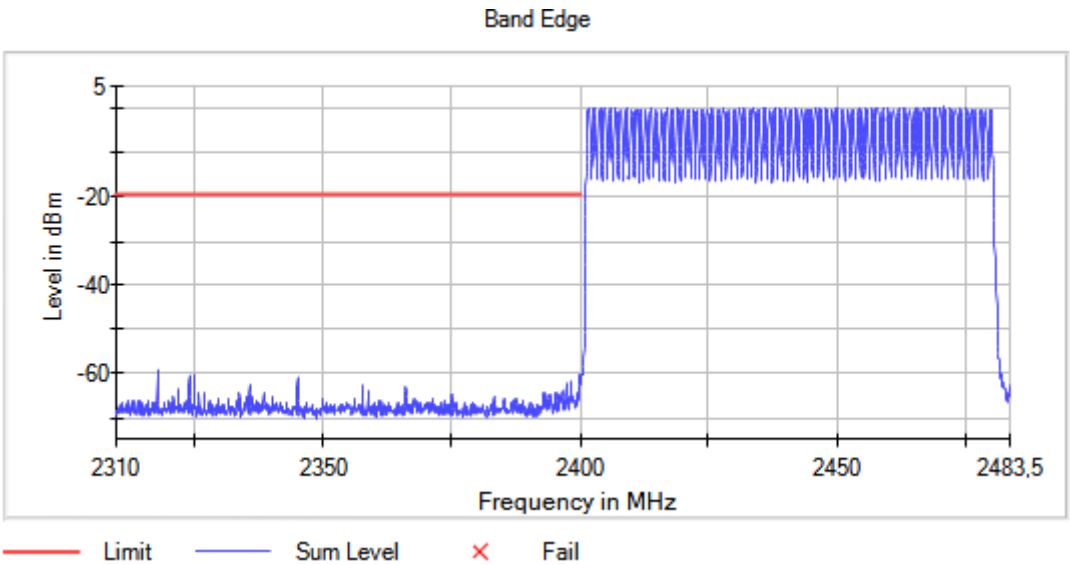

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	86 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1

Modulation = BT (GFSK)

Antenna configuration = SISO

Active Port = 1

Images:

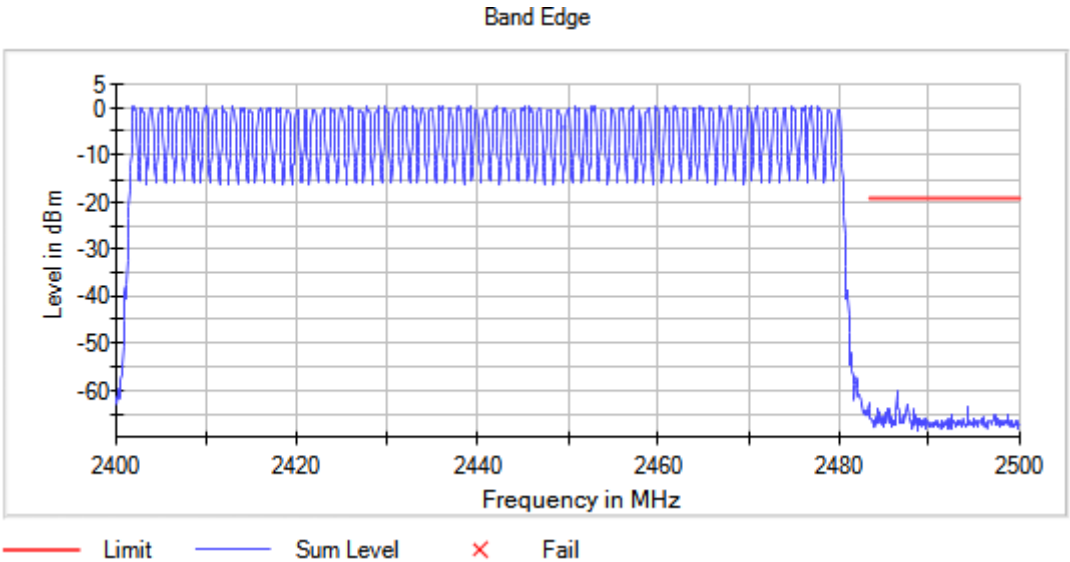

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	86 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1

Images:

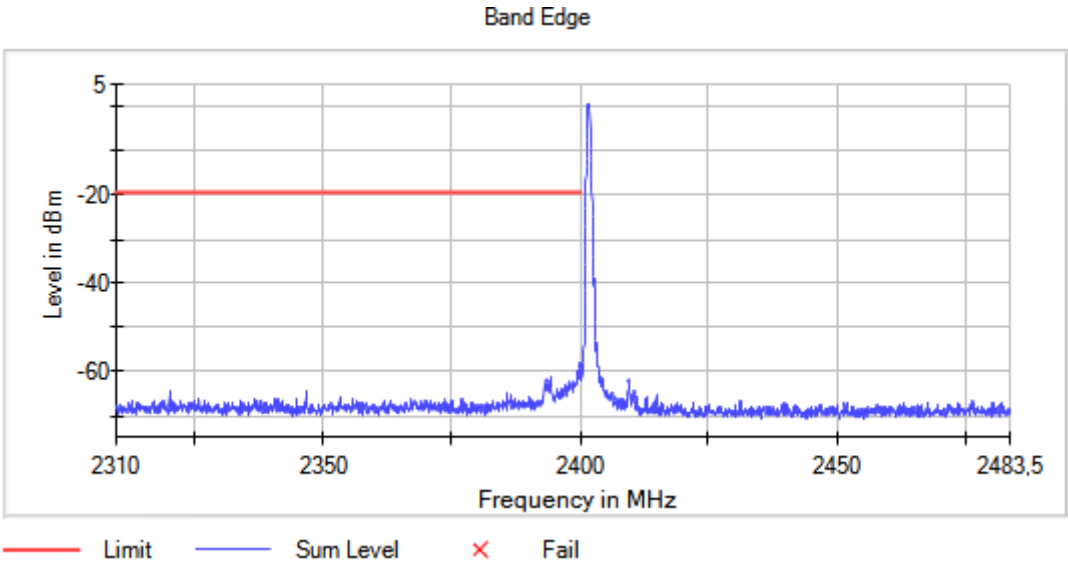

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	86 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK)


Antenna configuration = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

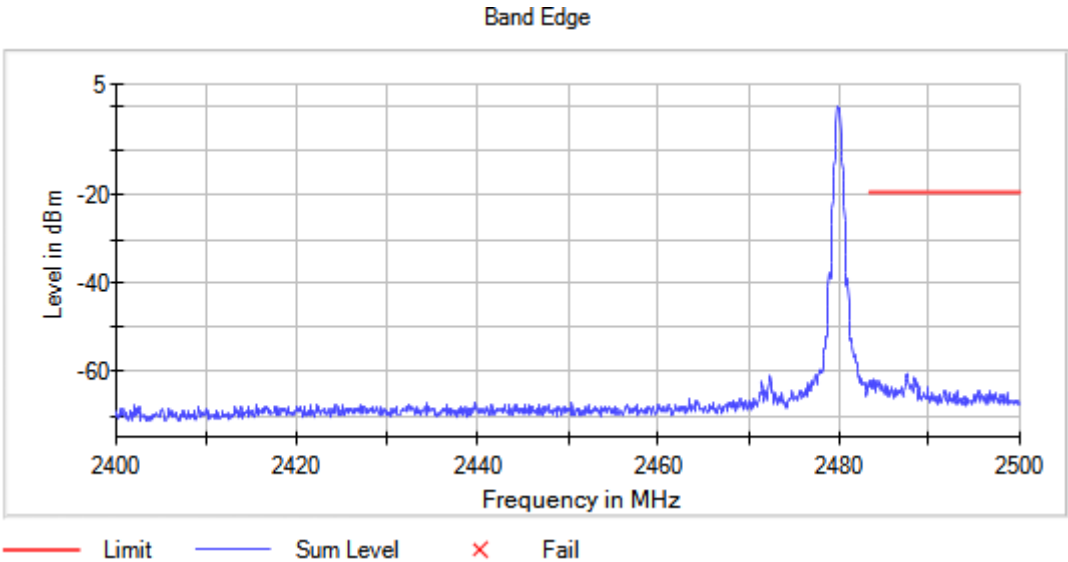

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	86 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK)
Antenna configuration = SISO Active Port = 1

Images:

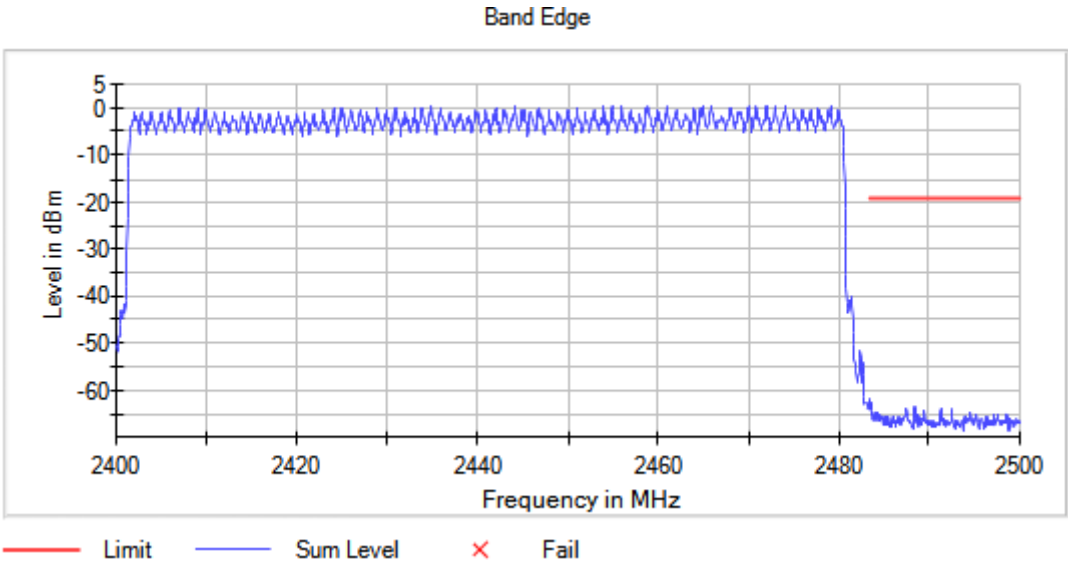

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1

Modulation = BT (Pi/4 DQPSK)

Antenna configuration = SISO

Active Port = 1

Images:

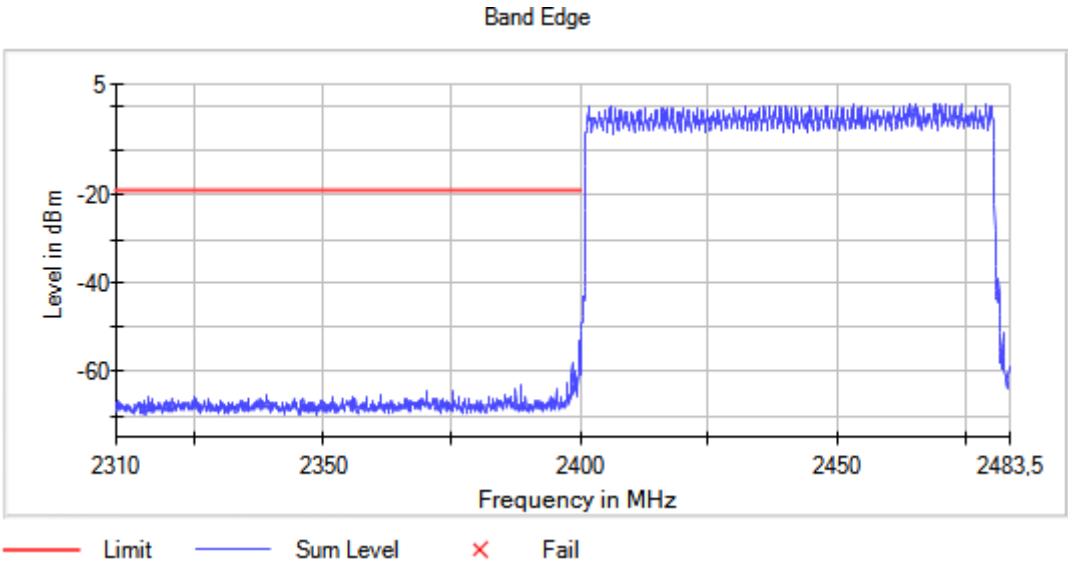

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK)


Antenna configuration = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

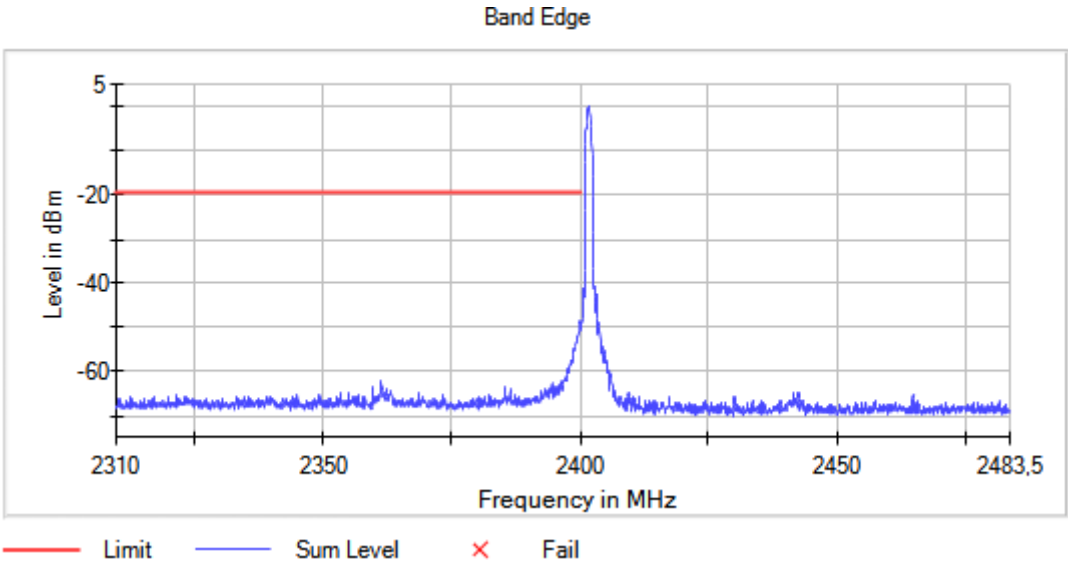

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK)


Antenna configuration = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

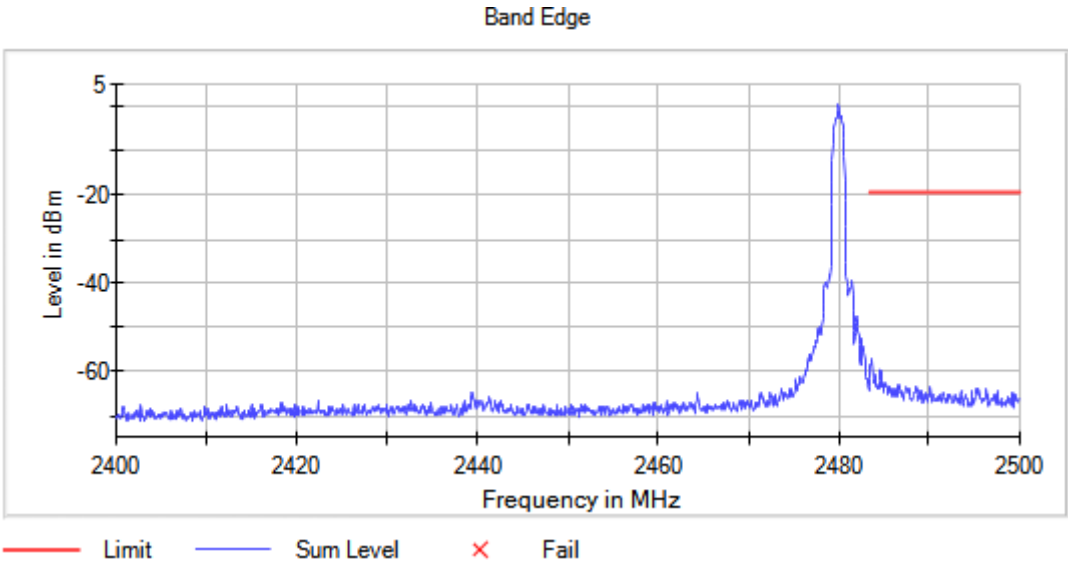

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1

Modulation = BT (8DPSK)

Antenna configuration = SISO

Active Port = 1

Images:

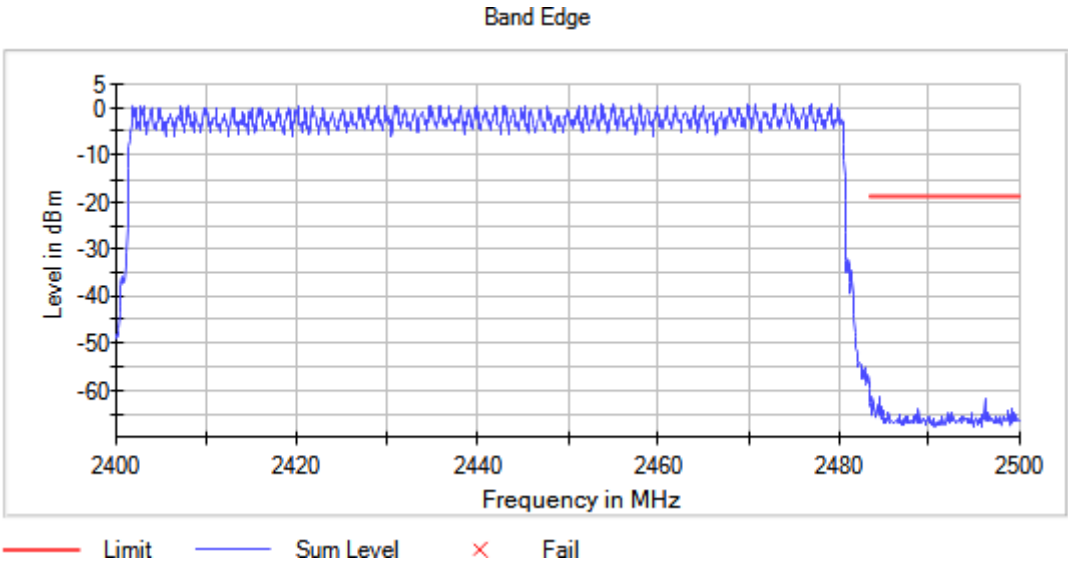

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	133 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1

Modulation = BT (8DPSK)

Antenna configuration = SISO

Active Port = 1

Images:

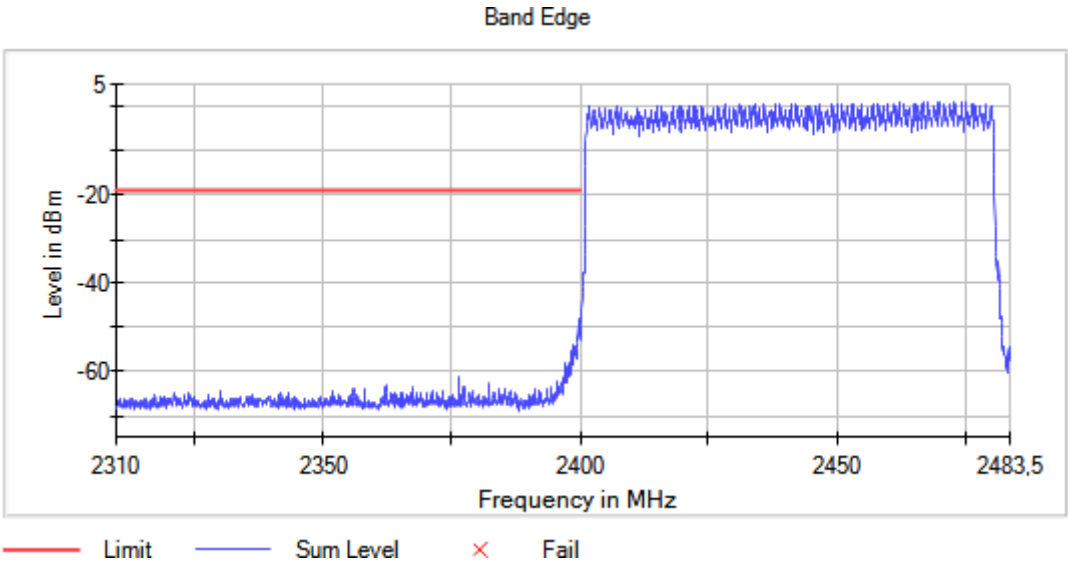

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	133 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK)


Antenna configuration = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

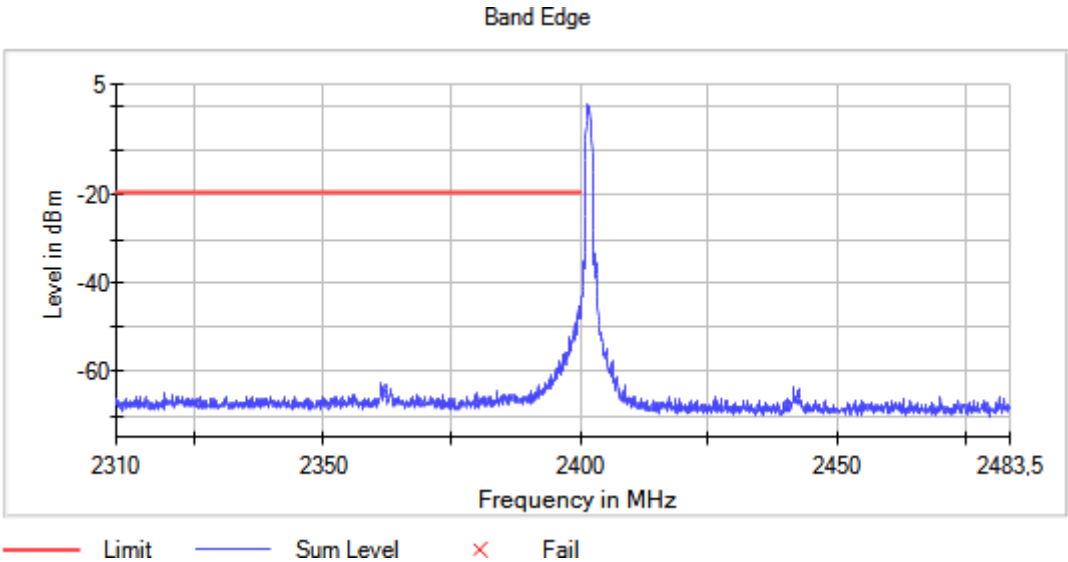

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	133 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK)


Antenna configuration = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

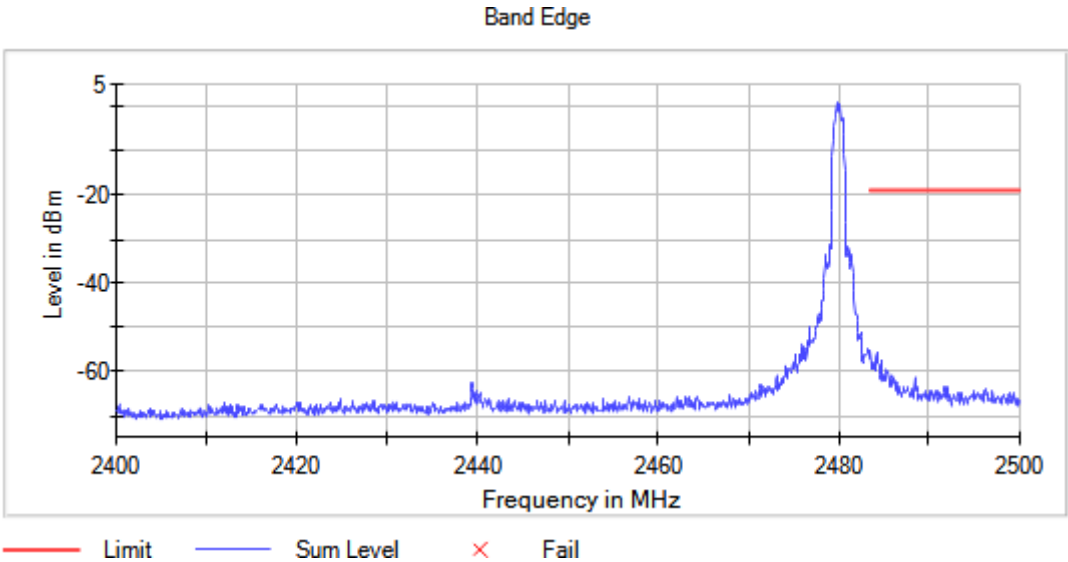

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	133 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-armonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th armonic.

The setting for each range of frequency is indicated in the following tables:

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44]					
30 MHz - 1 GHz	40 kHz	PK+	100 kHz	0,01 s	0 dB
1 GHz - 2,39 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
2,39 GHz - 2,484 GHz	40 kHz	PK+	100 kHz	0,01 s	0 dB
2,484 GHz - 3 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
3 GHz - 17 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB
17 GHz - 26 GHz	400 kHz	PK+	1 MHz	0,01 s	0 dB

Results

Frequency Range GHz = [0.03, 1]

Modulation: The spurious frequencies detected do not depend on either the modulation or the operating channel.

Freq Rng (GHz)	Equipment	Freq (MHz)	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	PoI	Detector
[0.03, 1]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	374.9805	38.78	H	PK
				35.49	H	QP
		944.9525	944.9525	35.02	V	PK
				26.27	V	QP

Attachments

Frequency Range GHz = [0.03, 1]

Modulation = The spurious frequencies detected do not depend on the modulation.

Antenna configuration: SISO


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = The spurious frequencies detected do not depend on the operating channel.

Active Port = 1

Images:

Test range performed in worst-case.

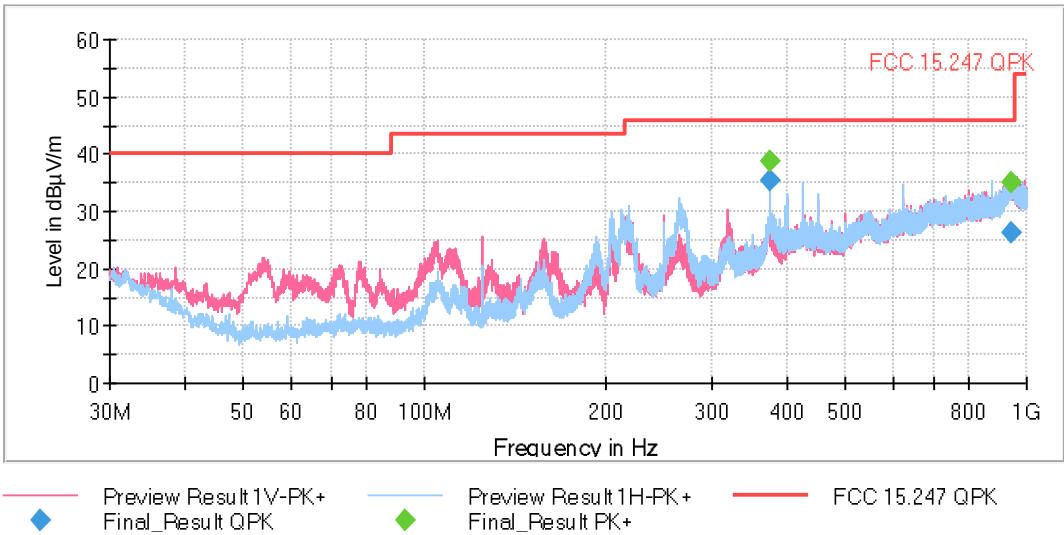

Modulation: BT (GFSK)

Results

No spurious frequencies detected at less than 20 dB below the limit.



Verdict


Pass

Attachments

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK) Frequency MHz = 2402.00000
Antenna configuration = SISO Active Port = 1



Images:

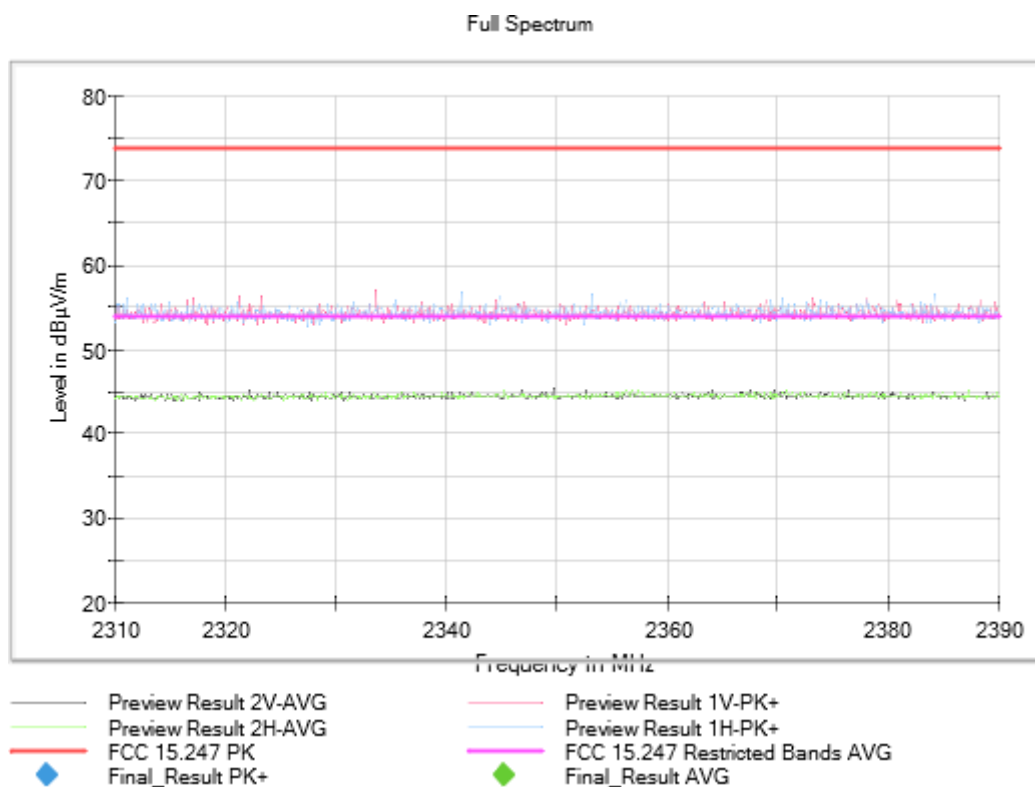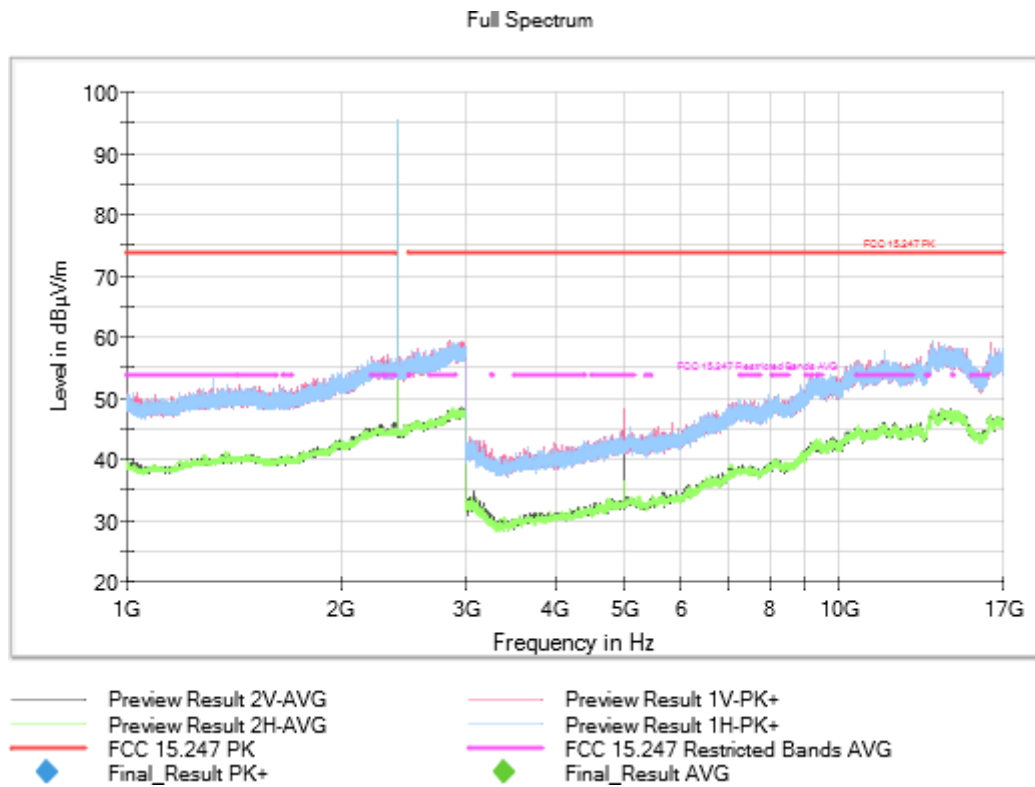


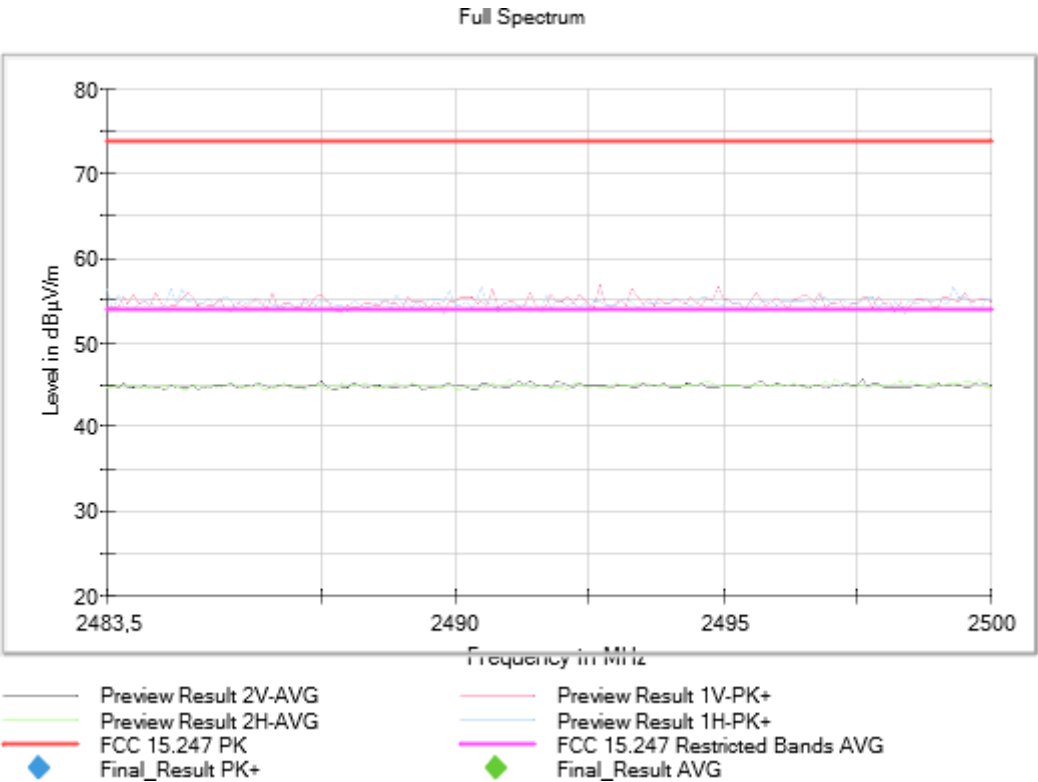

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1



Images:

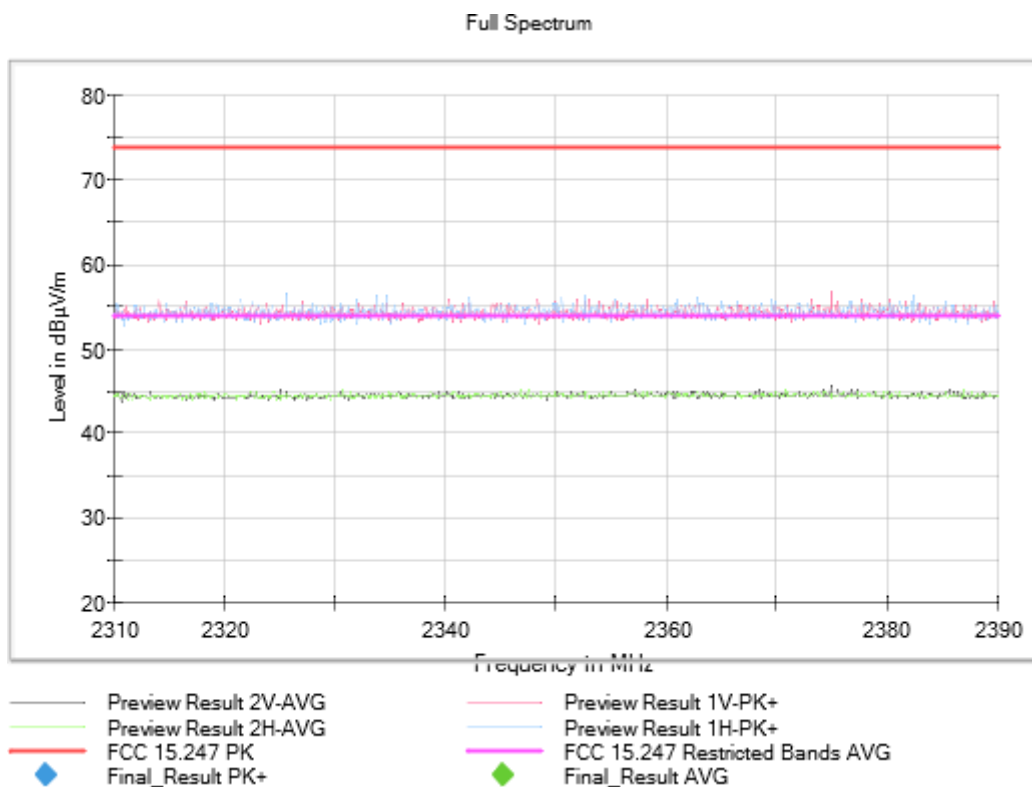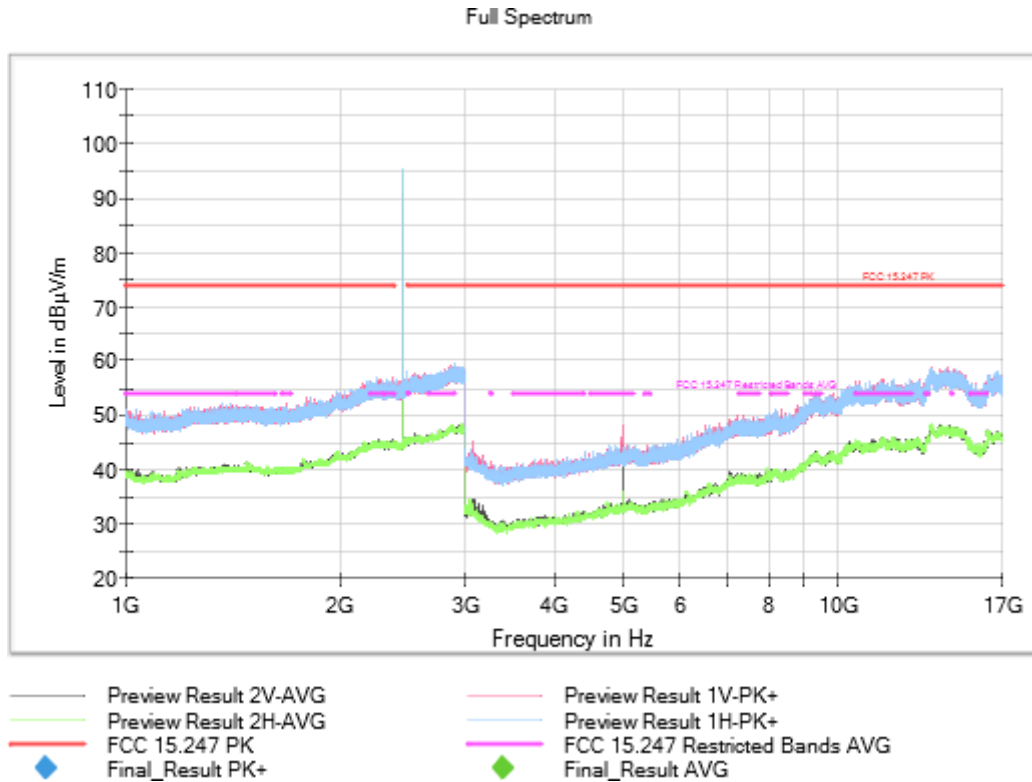


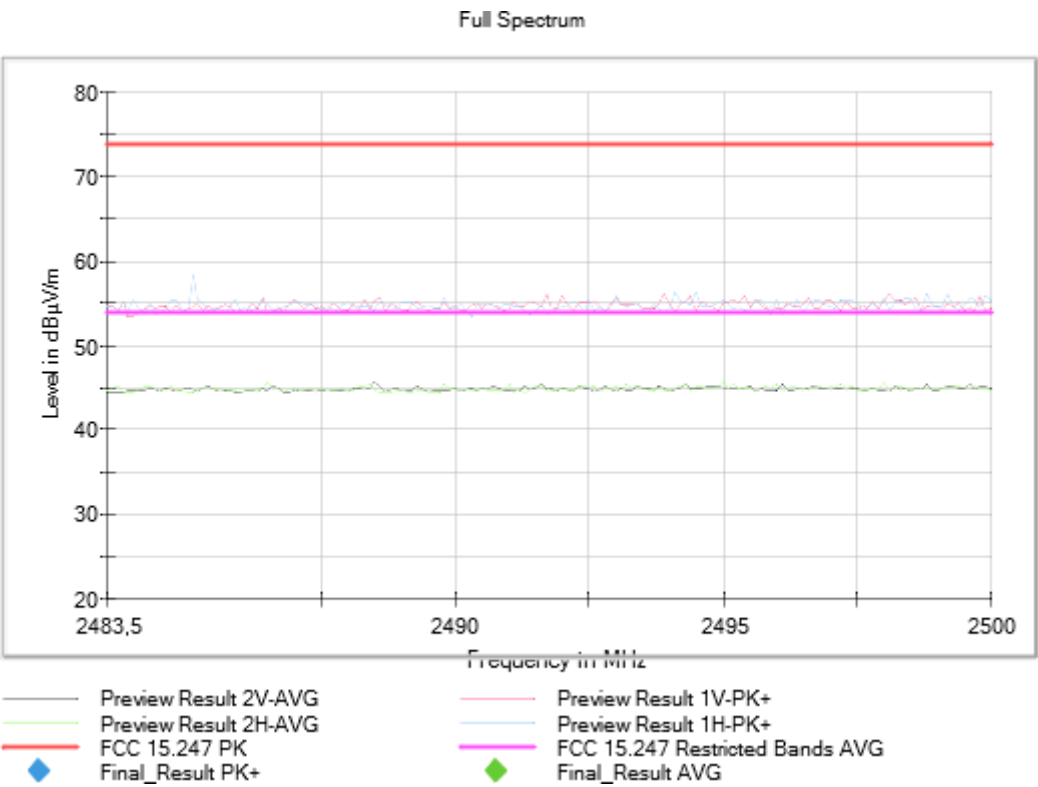

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (GFSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

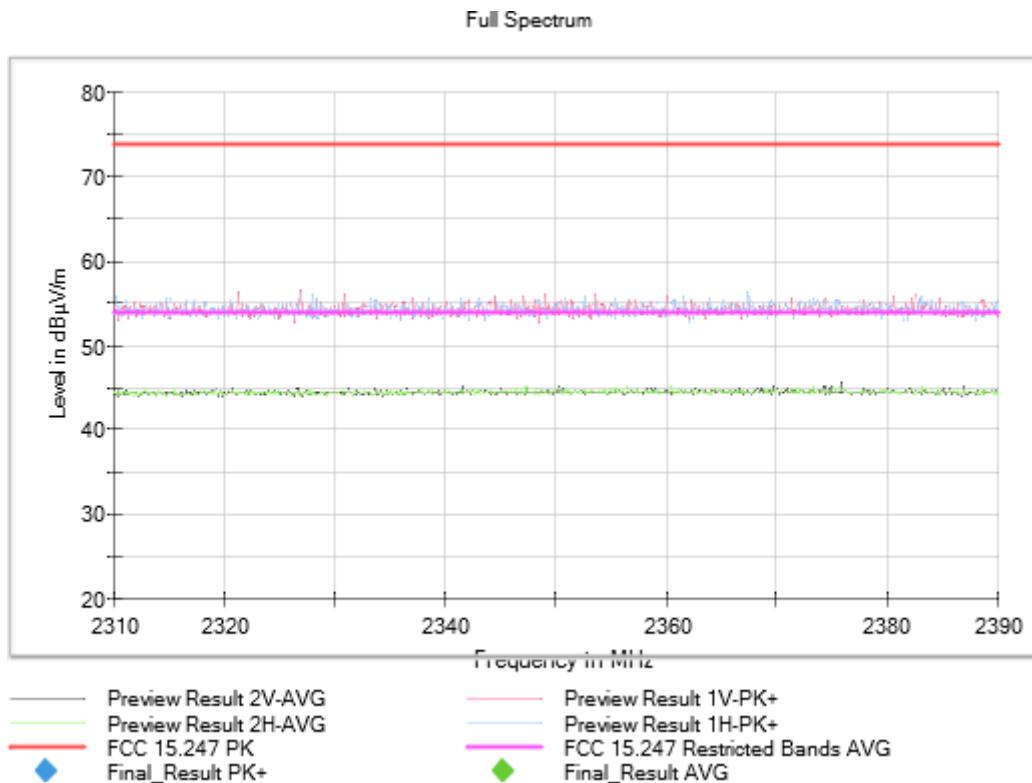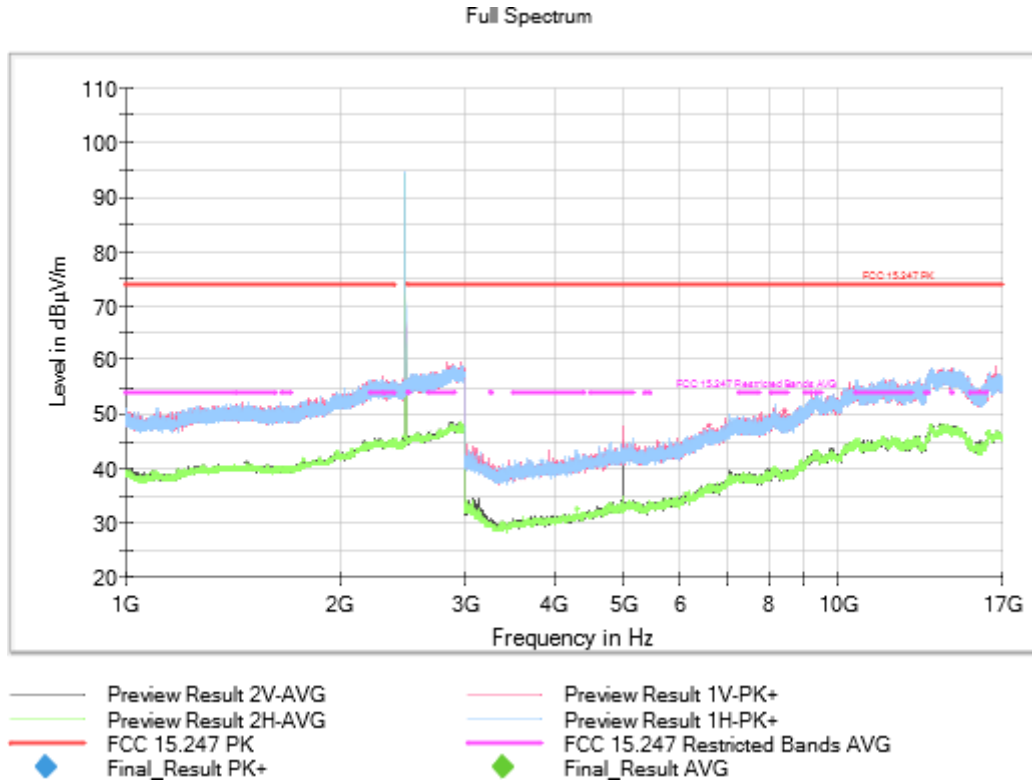

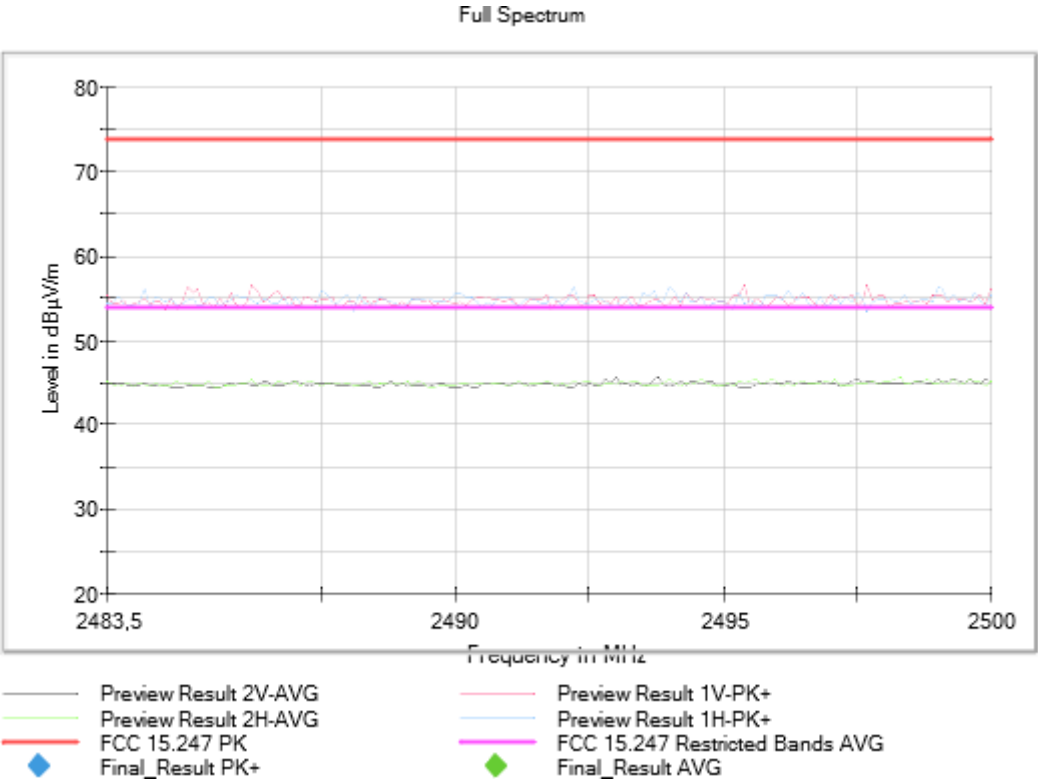

Modulation: BT (Pi/4 DQPSK)

Results

No spurious frequencies detected at less than 20 dB below the limit.

Verdict

Pass



Attachments


Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2402.00000

Antenna configuration = SISO Active Port = 1



Images:

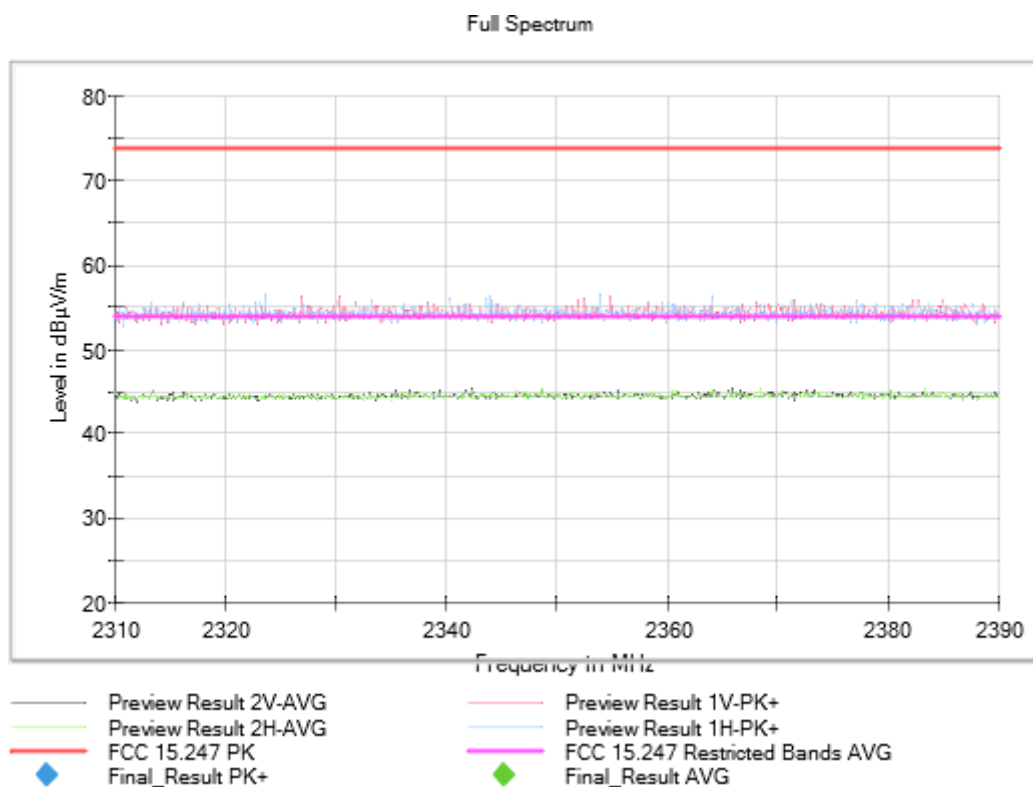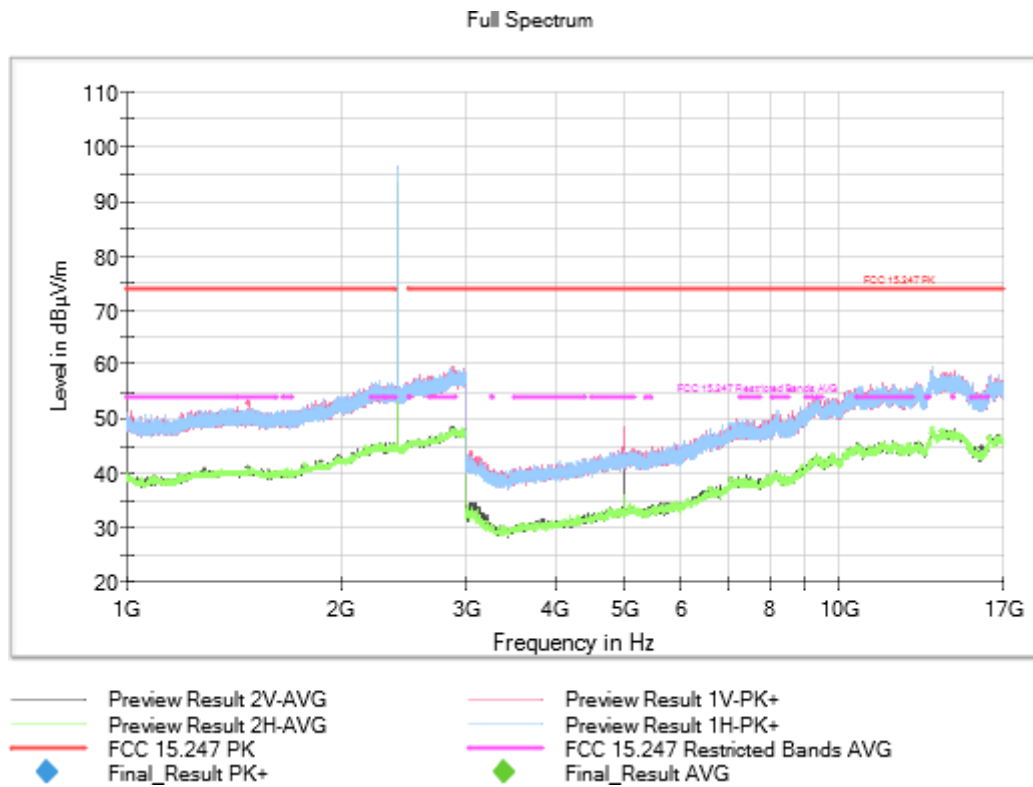


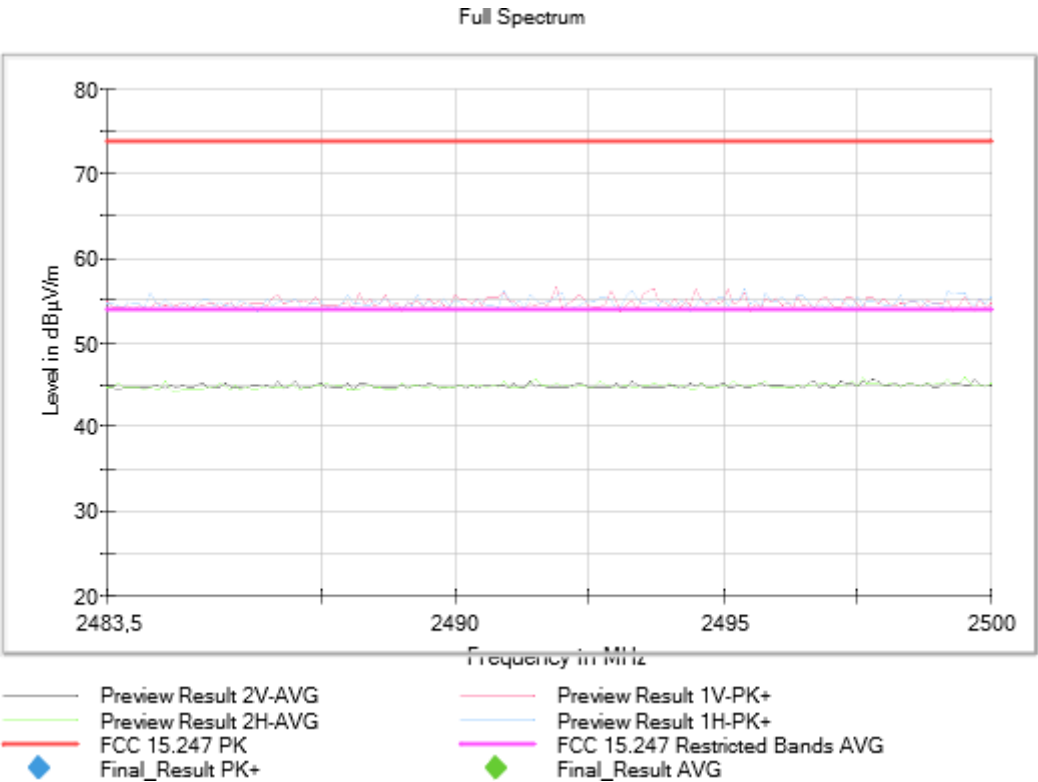

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1



Images:

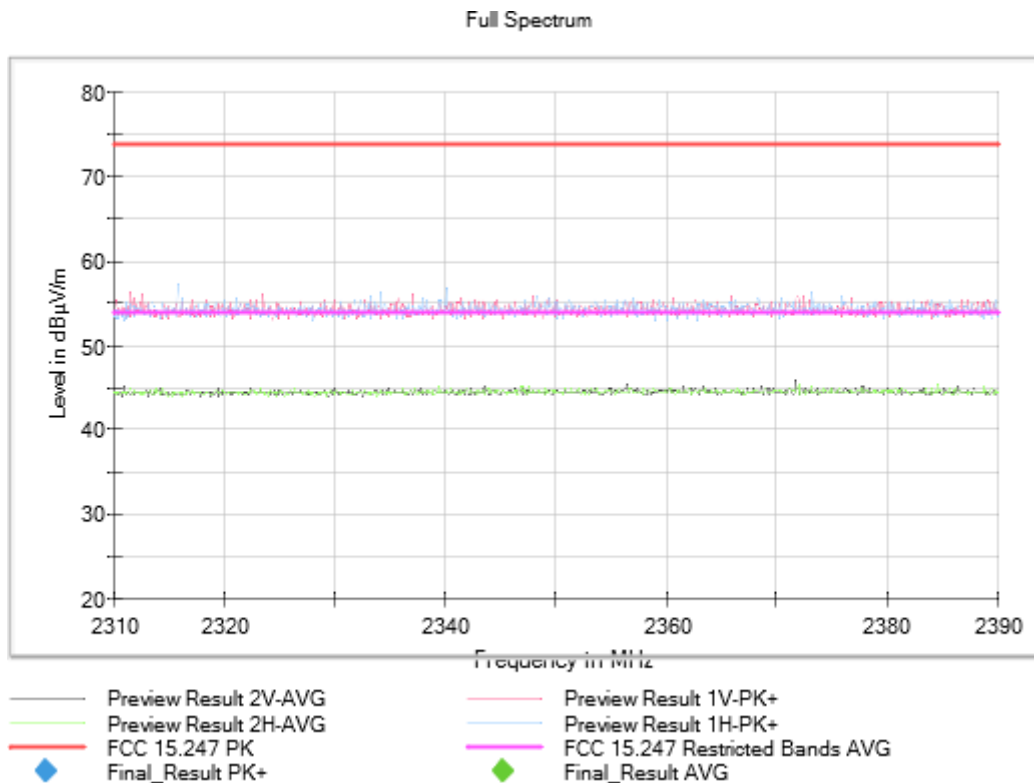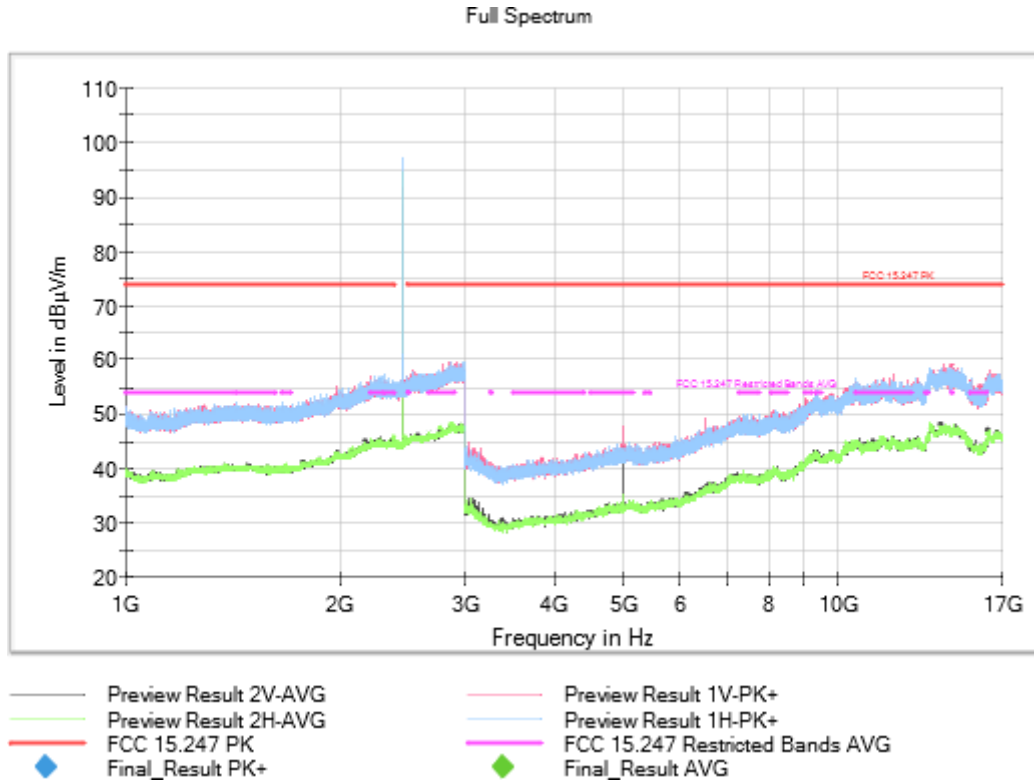


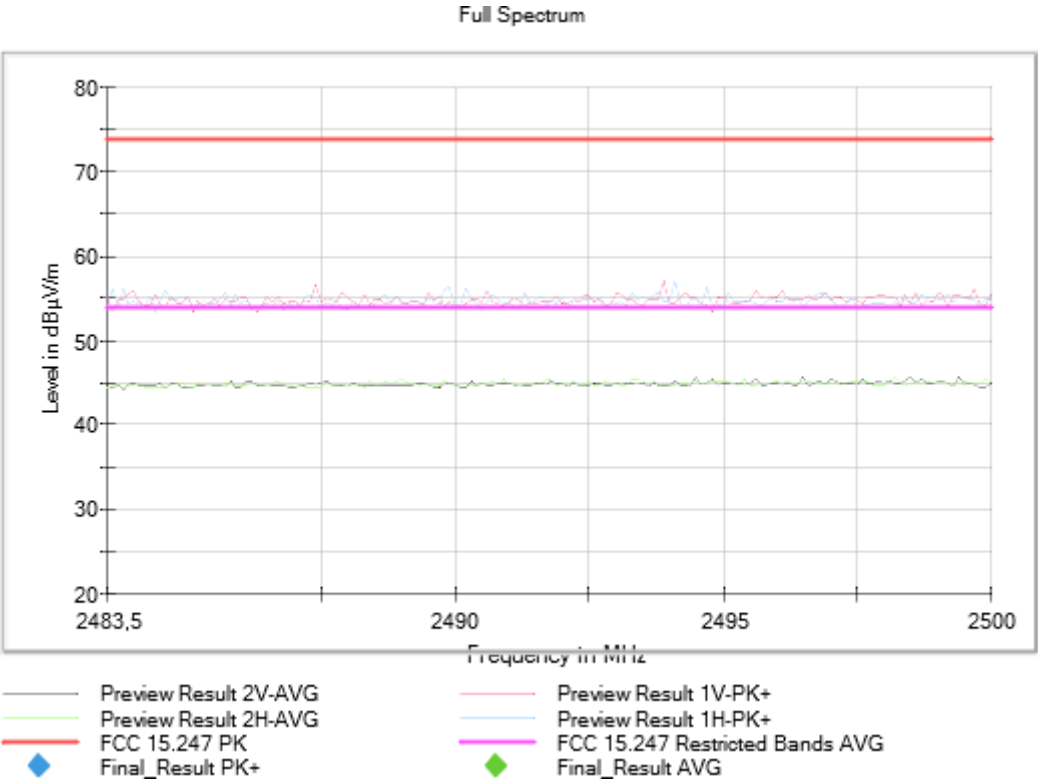

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (Pi/4 DQPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

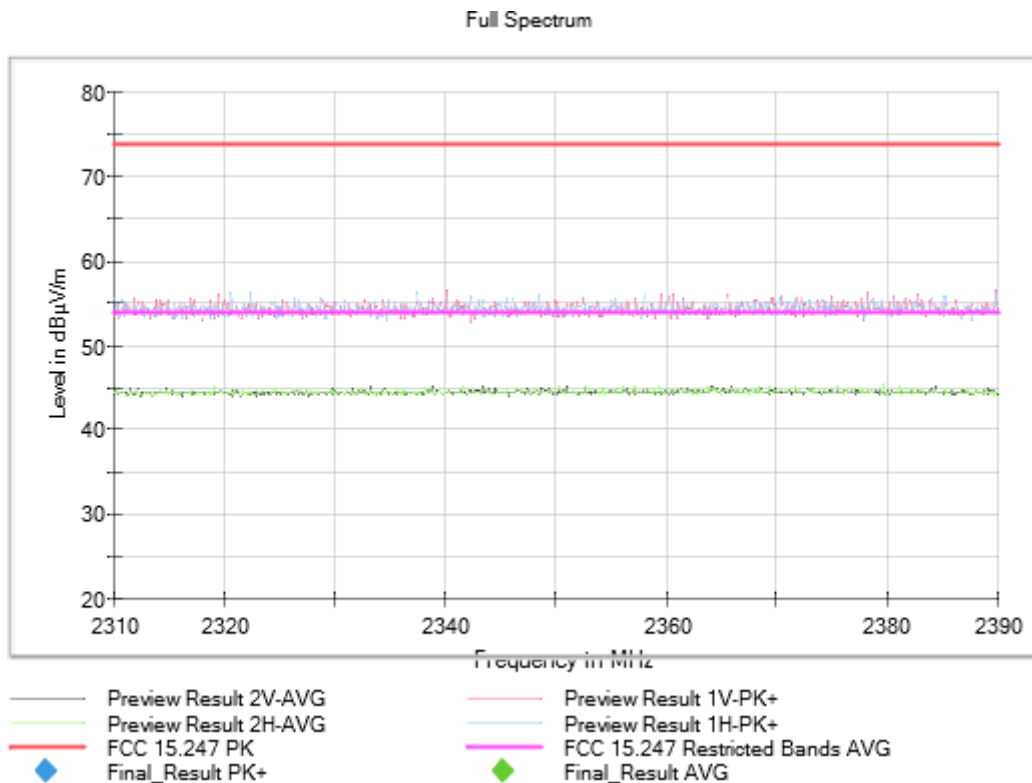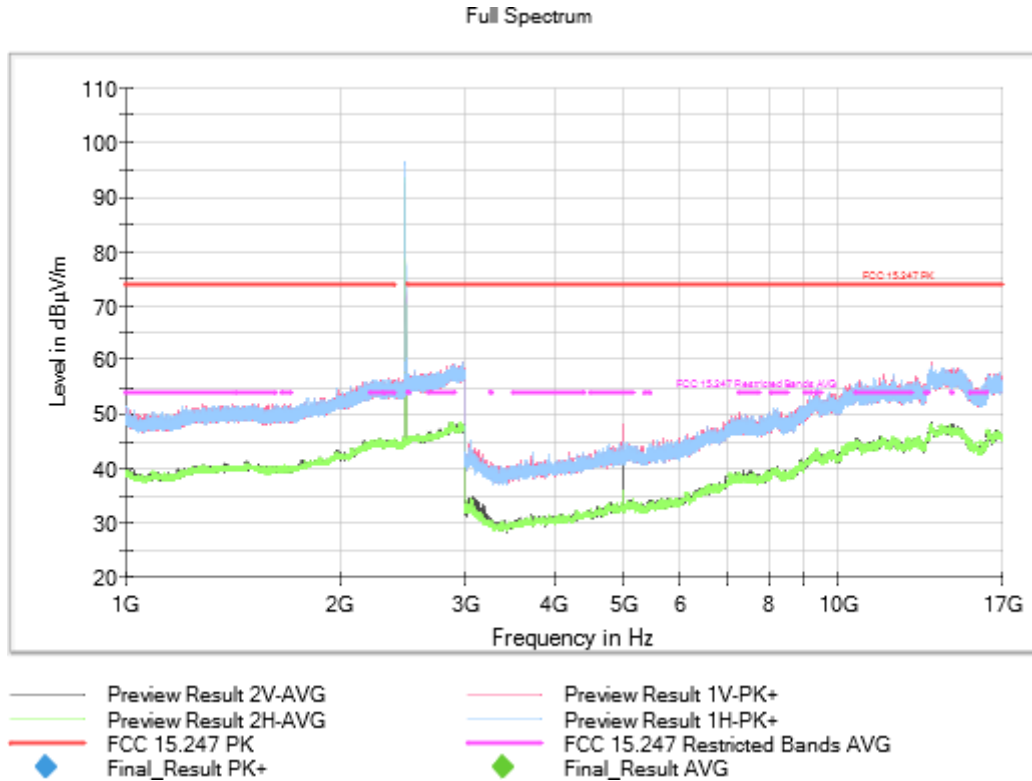

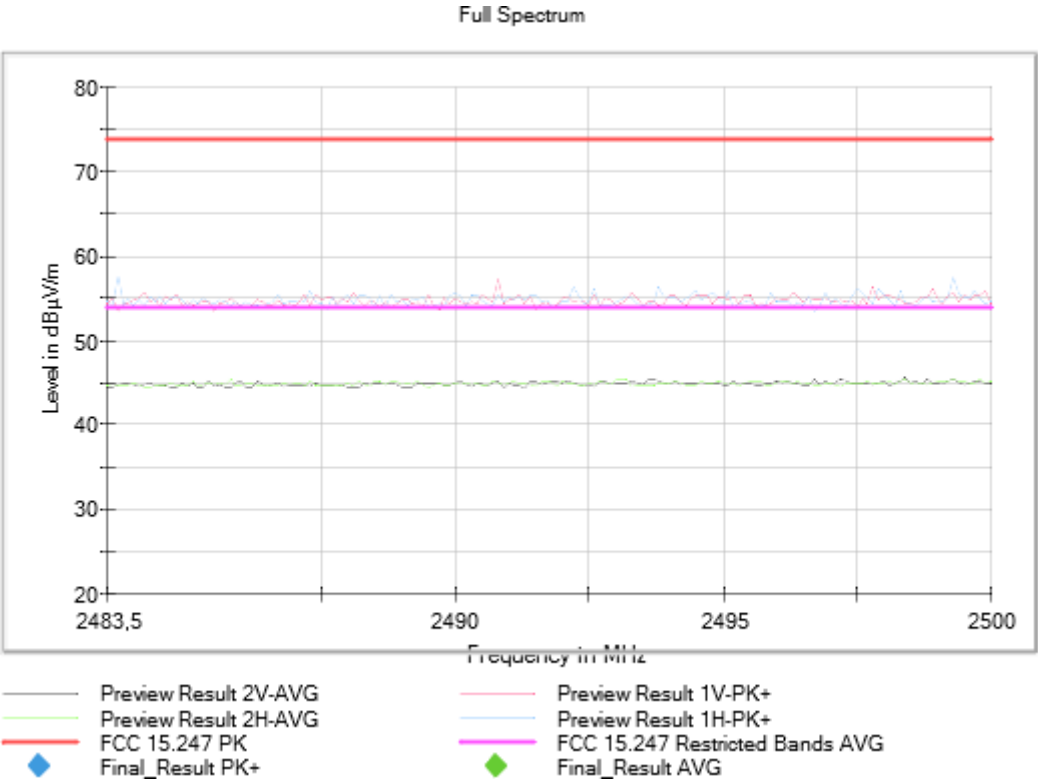

Modulation: BT (8DPSK)

Results

* Duty Cycle correction factor: 1.15 dB

Freq Rng (GHz)	Equipment	Freq (MHz)	Unwanted Freq (MHz)	Unwanted Lvl (dBµV/m)	Corrected RMS Unwanted Lvl (dBµV/m)	Pol	Detector
[1, 17]	Frequency Hopping Spread Spectrum systems (DSS)	2441.00000	2246.400	57.08	--	V	PK
				45.28	46.43	V	AVG
		2480.00000	2850.300	59.19	--	V	PK
				47.81	48.96	V	AVG

Verdict

Pass



Attachments


Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK) Frequency MHz = 2402.00000

Antenna configuration = SISO Active Port = 1



Images:

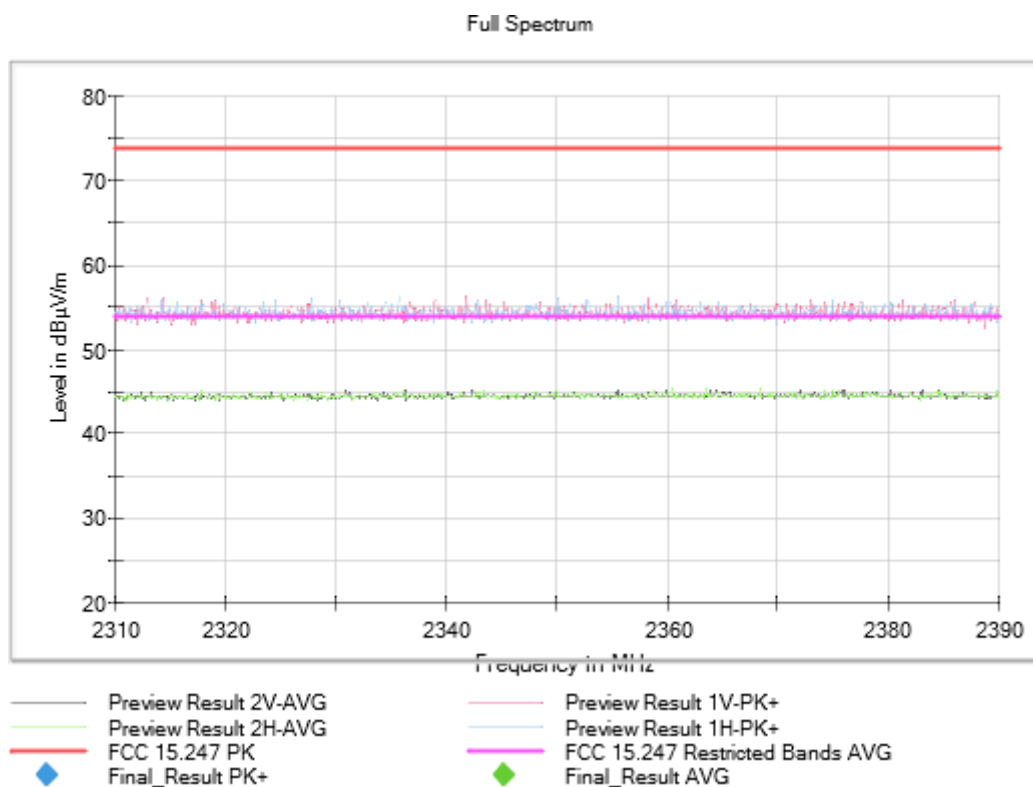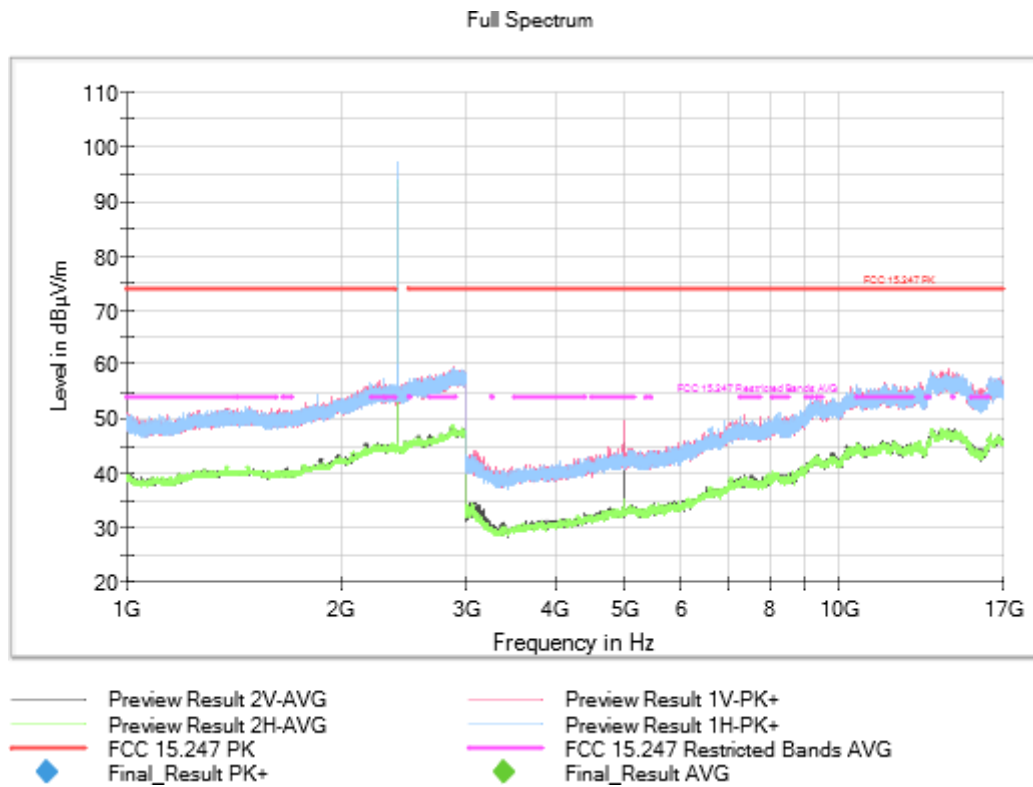


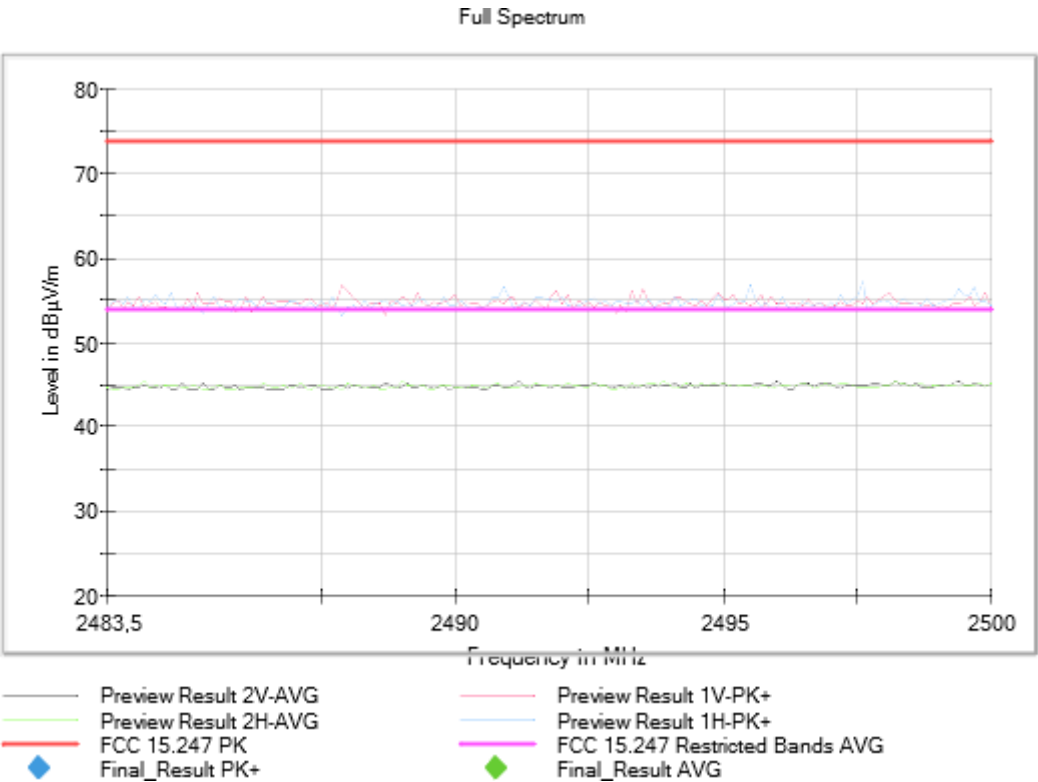

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK) Frequency MHz = 2441.00000
Antenna configuration = SISO Active Port = 1



Images:

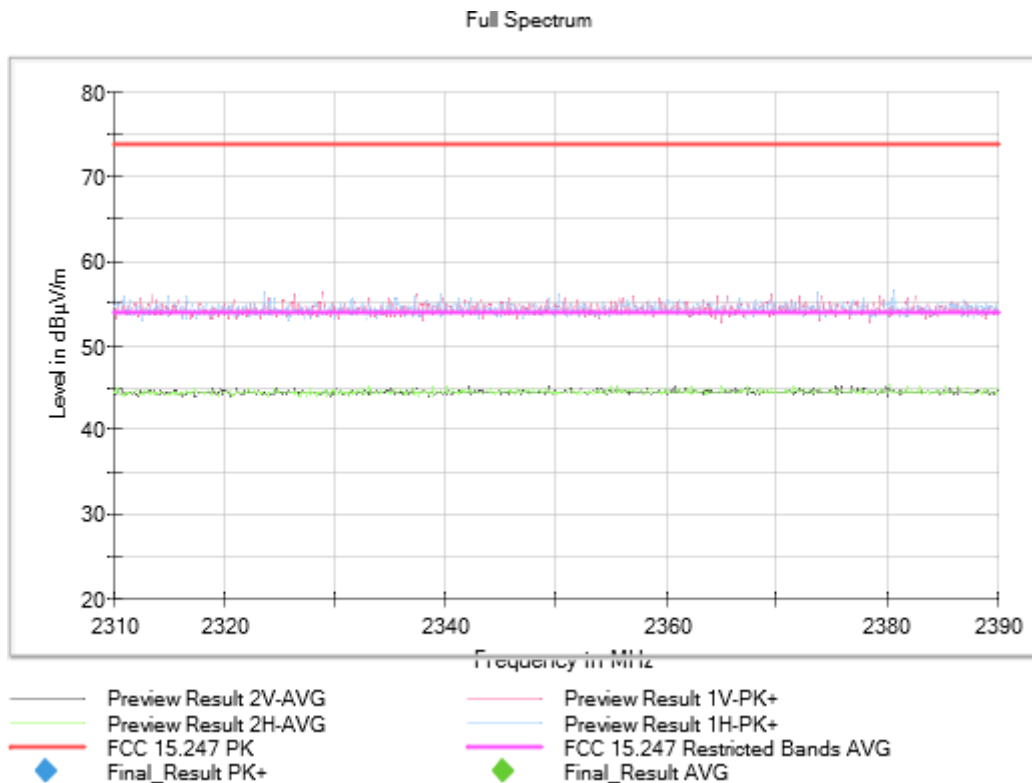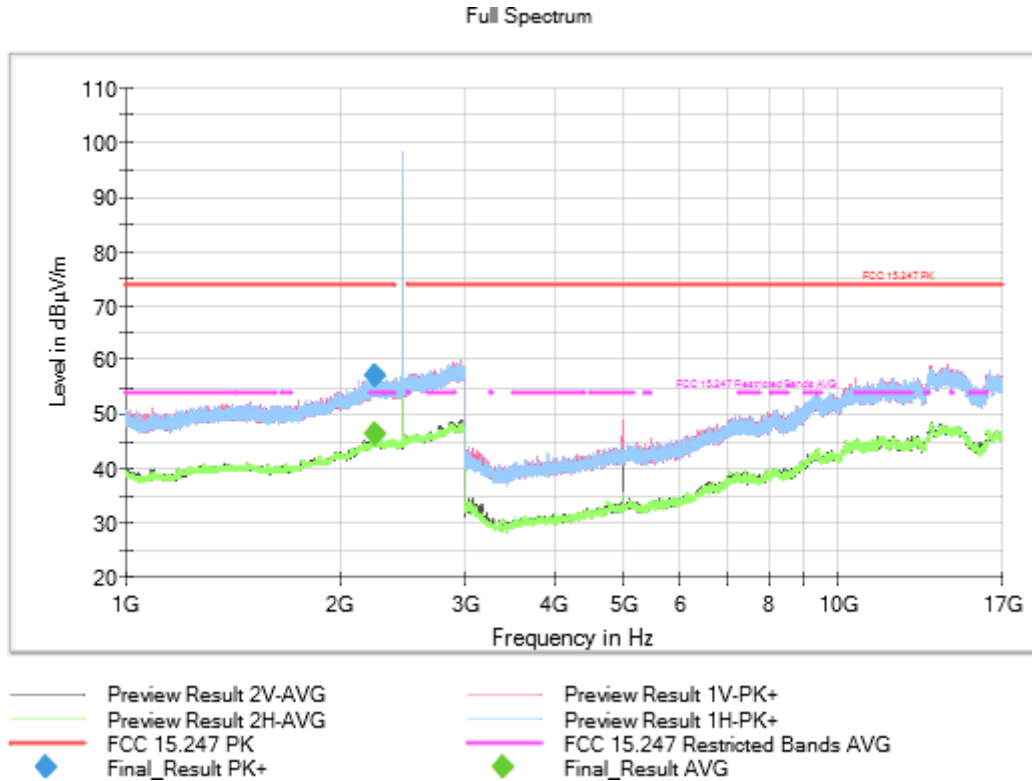


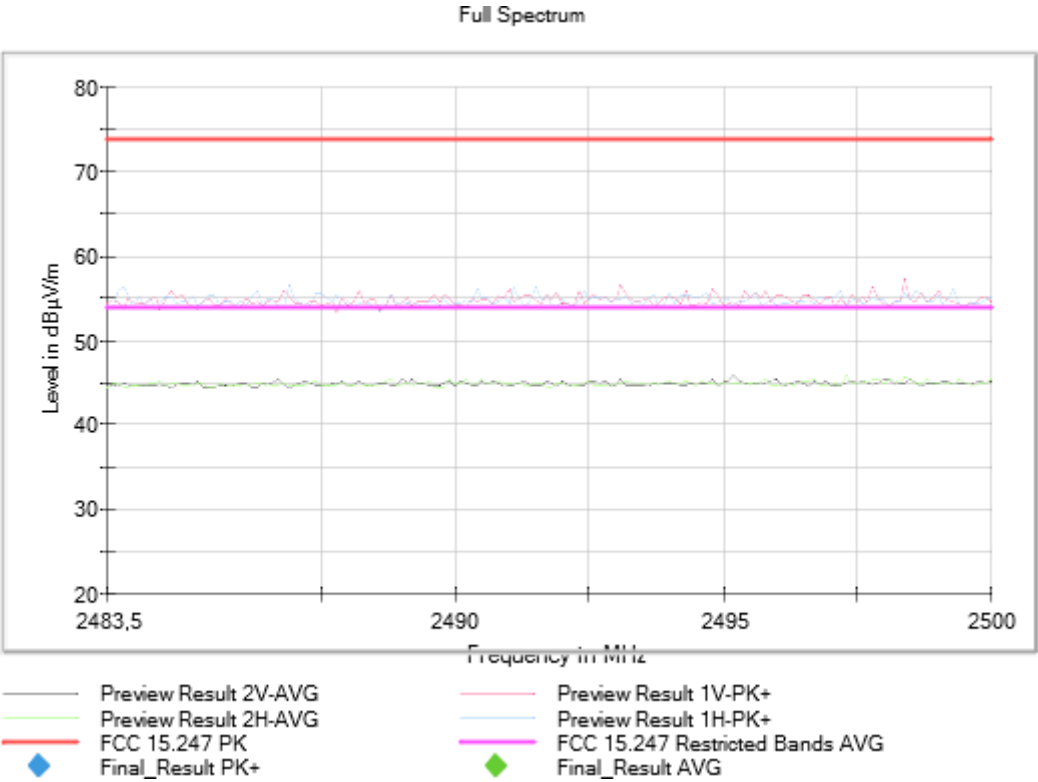

Frequency Range GHz = [1, 17] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Modulation = BT (8DPSK) Frequency MHz = 2480.00000
Antenna configuration = SISO Active Port = 1

Images:

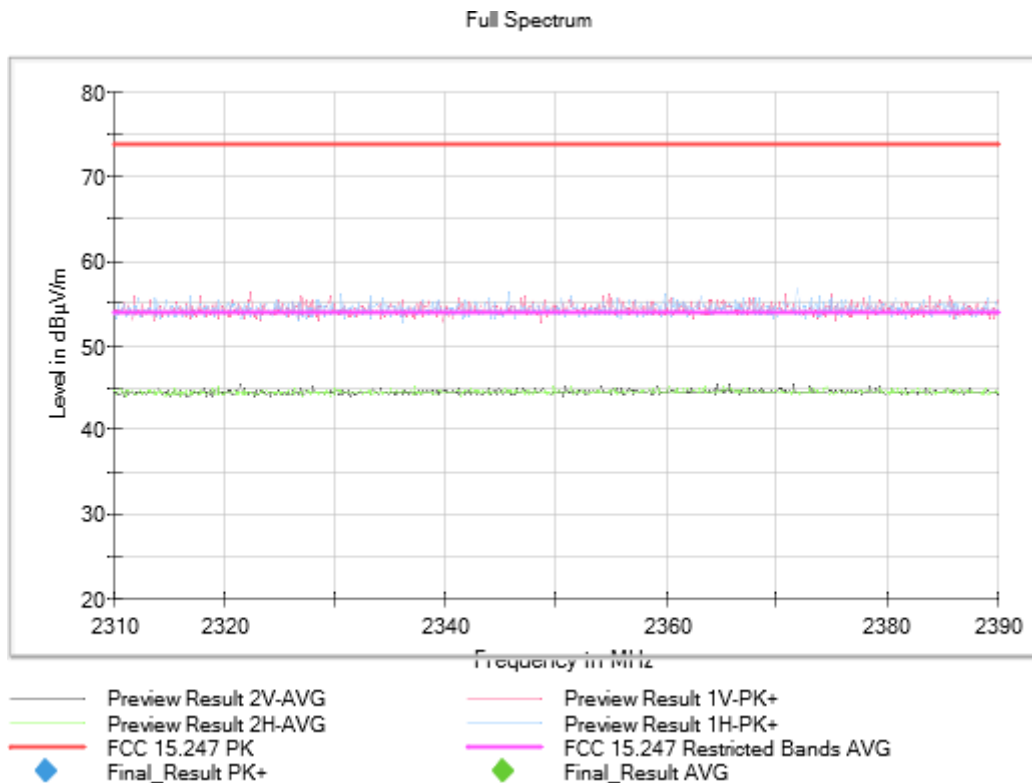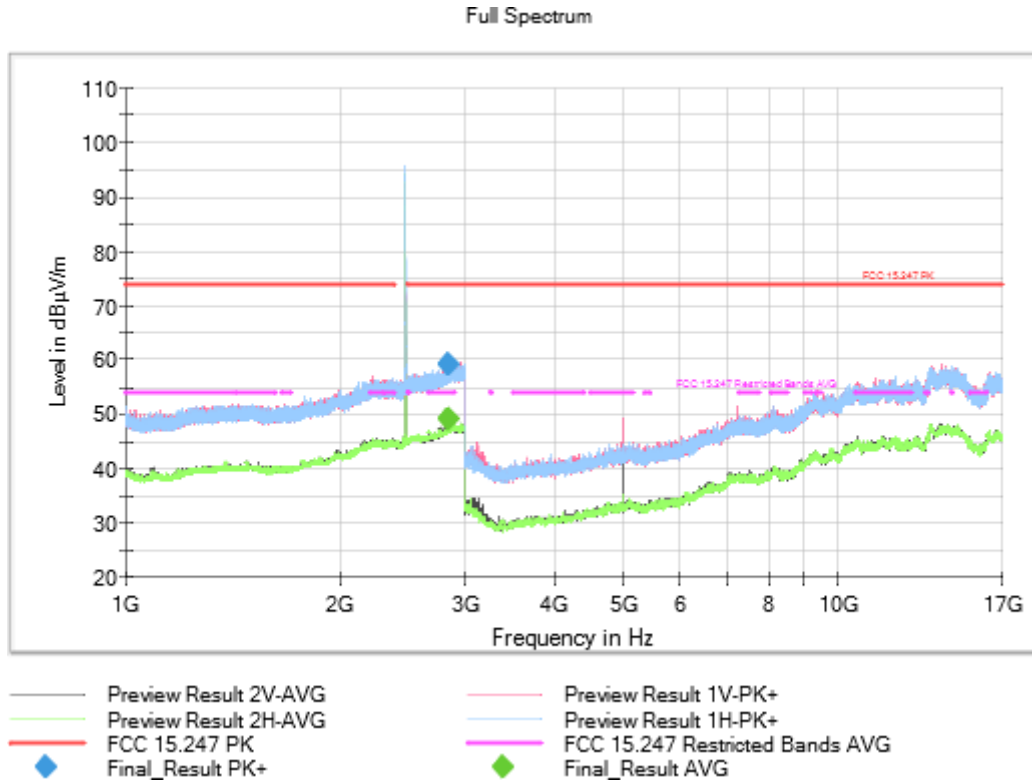

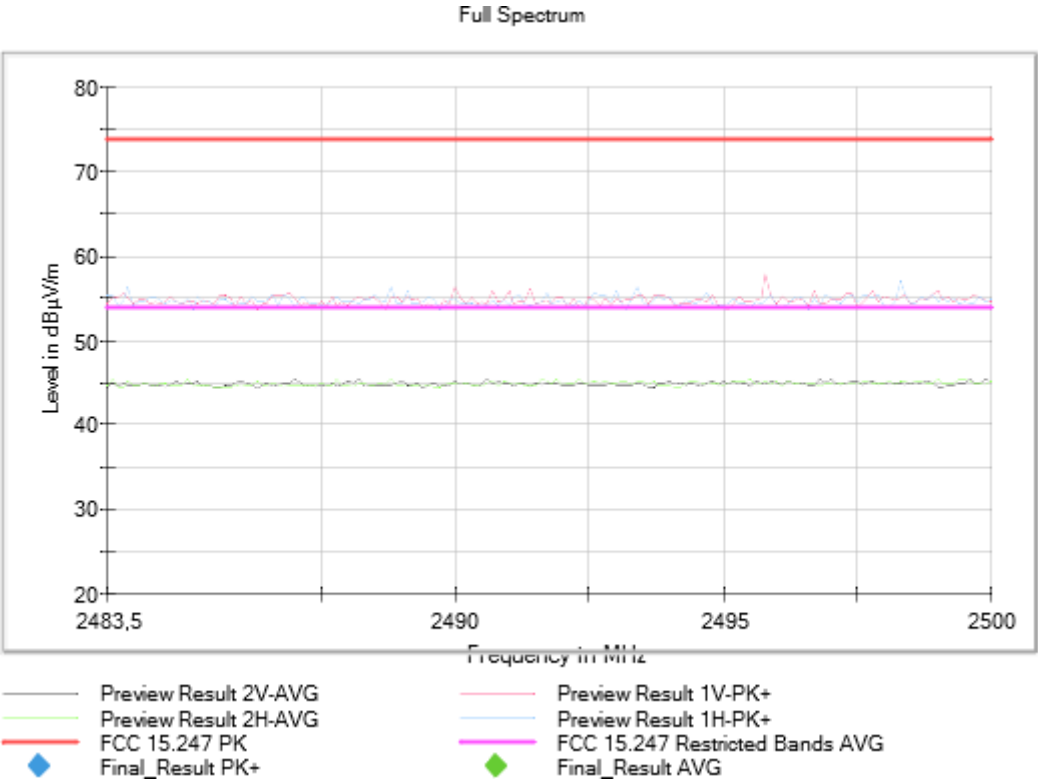

Frequency Range GHz = [17, 26]

Modulation: The spurious frequencies detected do not depend on either the modulation or the operating channel.

Results

No spurious frequencies detected at less than 20 dB below the limit.

Verdict

Pass

Attachments

Frequency Range GHz = [17, 26]

Modulation = The spurious frequencies detected do not depend on the modulation.

Antenna configuration: SISO


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = The spurious frequencies detected do not depend on the operating channel.

Active Port = 1

Images:

Test range performed in worst-case.

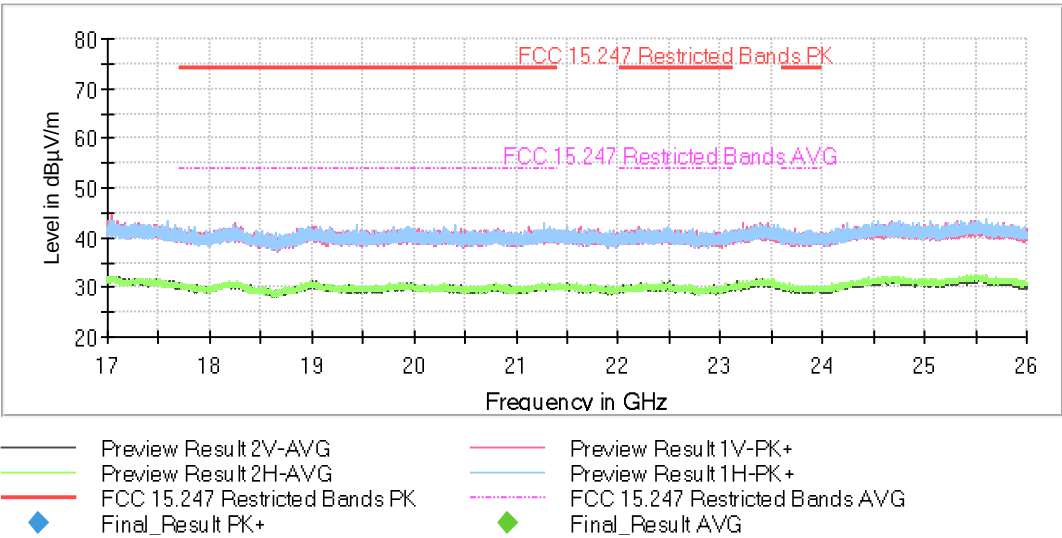

Appendix D: Test results. WLAN 2.4 GHz

TEST CASES DETAILS	232
<i>Occupied Channel Bandwidth 99%</i>	<i>232</i>
<i>RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth</i>	<i>282</i>
<i>RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density</i>	<i>353</i>
<i>RSS-247 5.4 (d) / FCC 15.247 (b) (1) Maximum Average Conducted output Power</i>	<i>423</i>
<i>RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)</i>	<i>427</i>
<i>RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)</i>	<i>475</i>

TEST CASES DETAILS

Occupied Channel Bandwidth 99%

Specifications

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Modulation: 802.11b (DSSS 1 Mbit/s)
Antenna configuration: SISO (port 1 and port 3) & MIMO (ports 1+3)

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Digital Transmission System (DTS)	20	2412.00000	1	13.500
			3	13.400
			1+3	13.500
		2437.00000	1	13.400
			3	13.500
			1+3	13.500
		2462.00000	1	13.100
			3	13.500
			1+3	13.200



Verdict

Pass

Attachments


Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2412.00000
Antenna configuration: SISO Active Port = 1

Images:

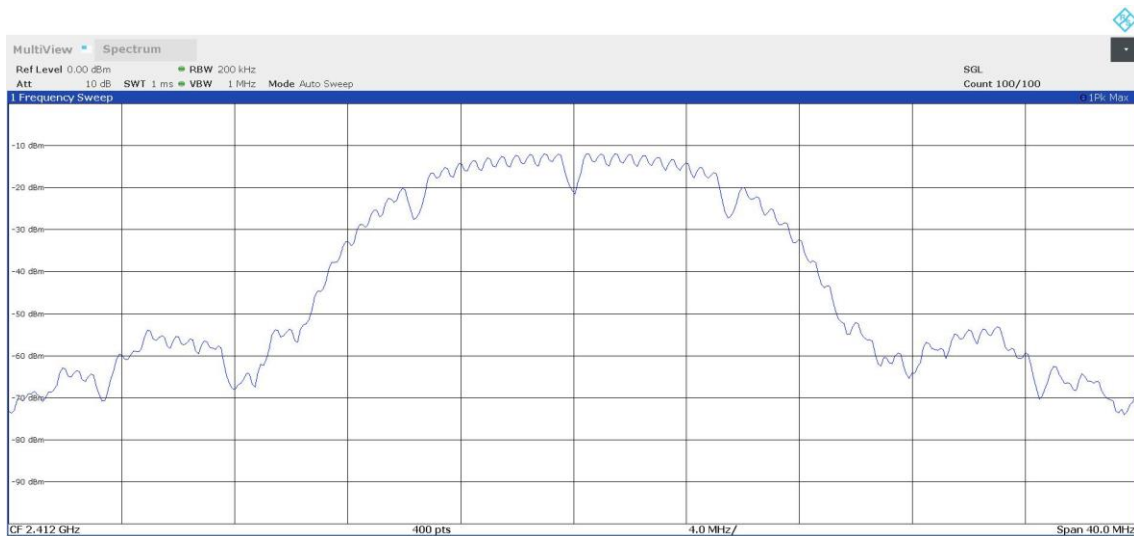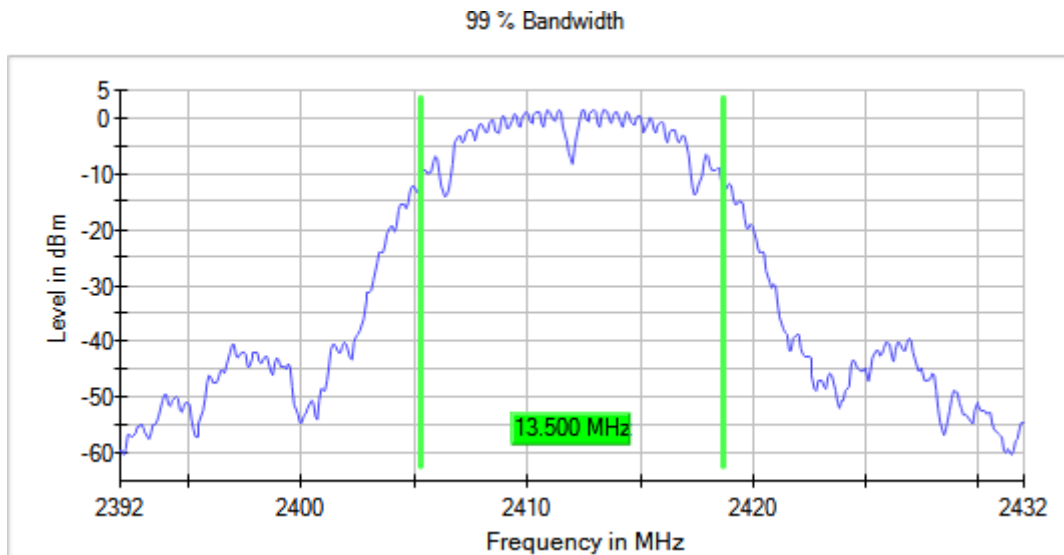



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2412.00000
Antenna configuration: SISO Active Port = 3

Images:

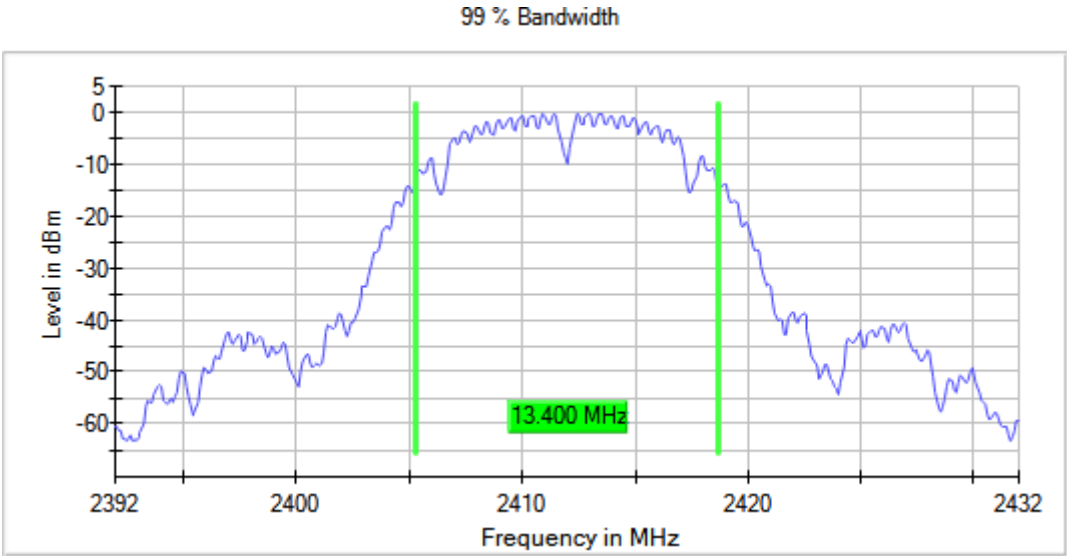


Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2412.00000
 Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

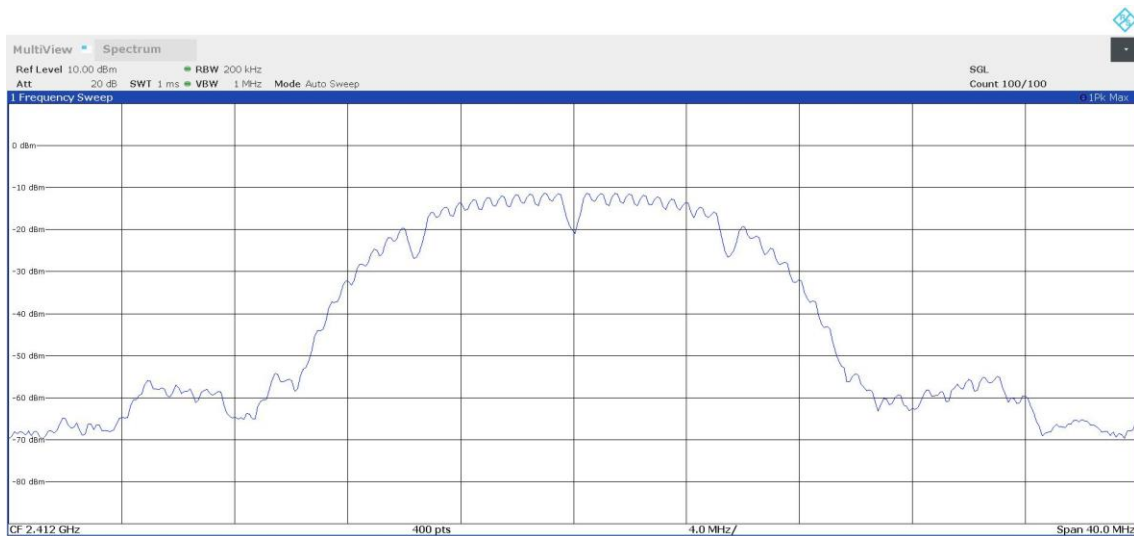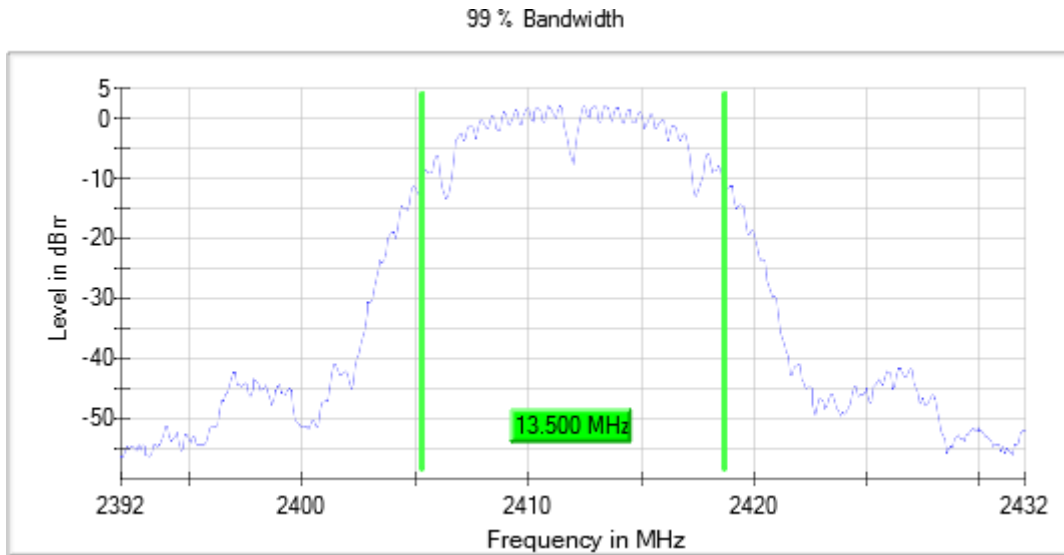



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration: SISO Active Port = 1

Images:

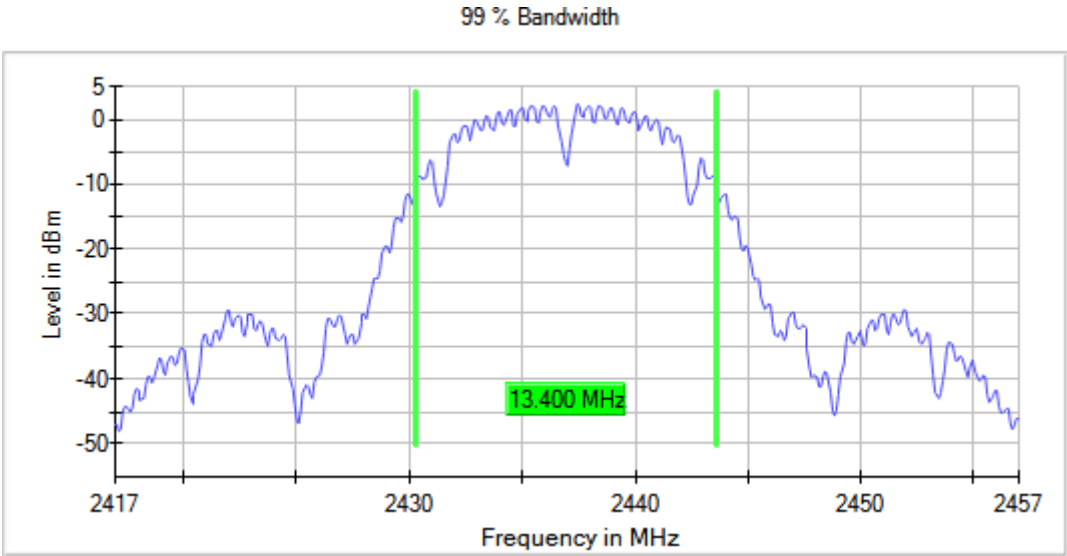



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2437.00000
 Antenna configuration: SISO Active Port = 3

Images:

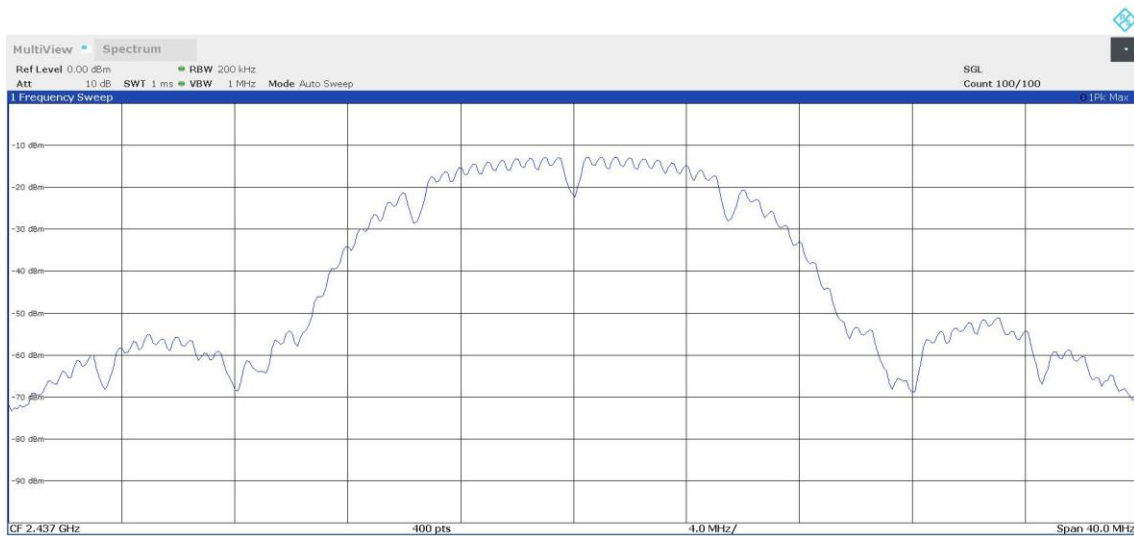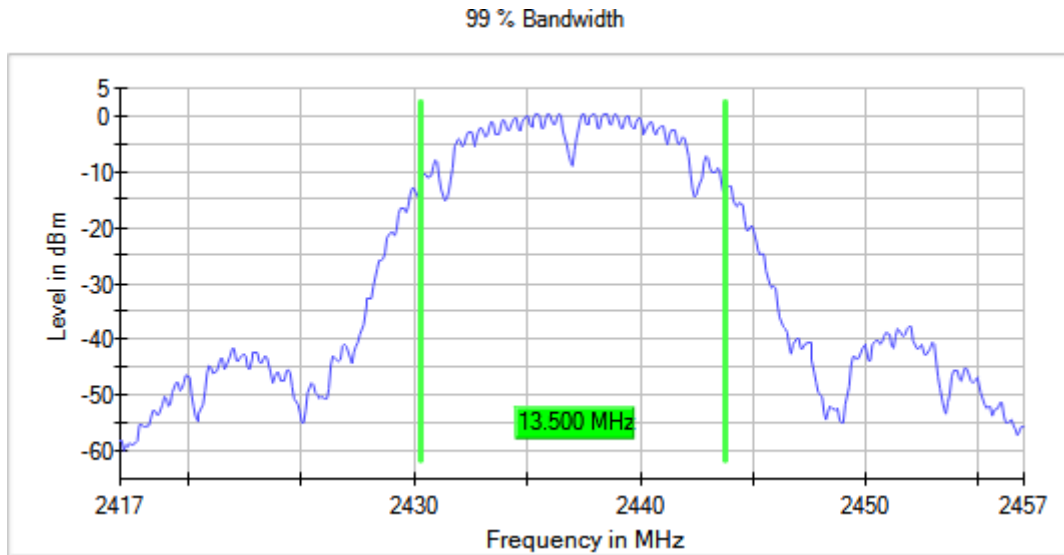



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

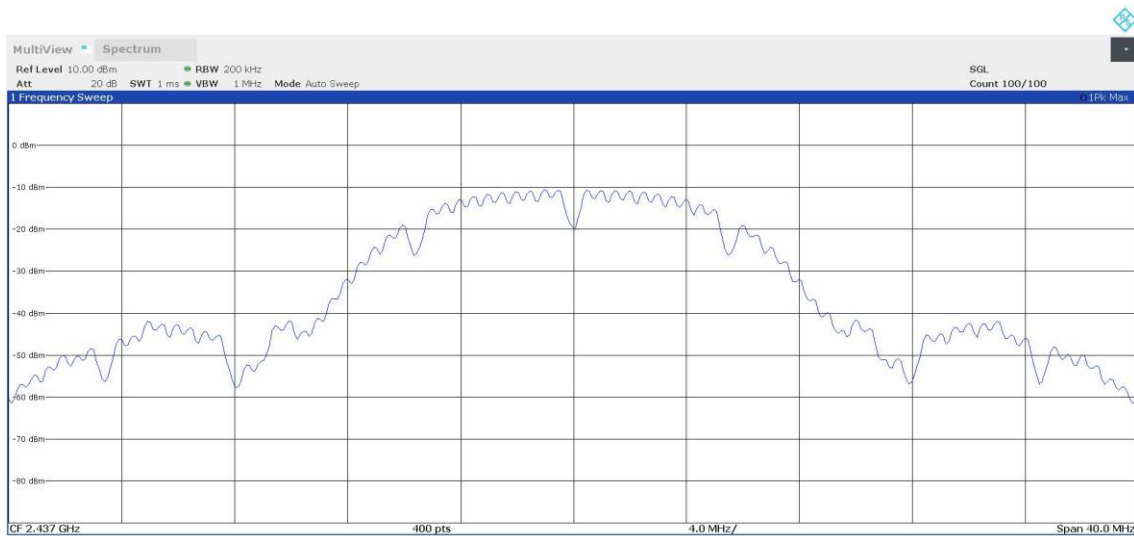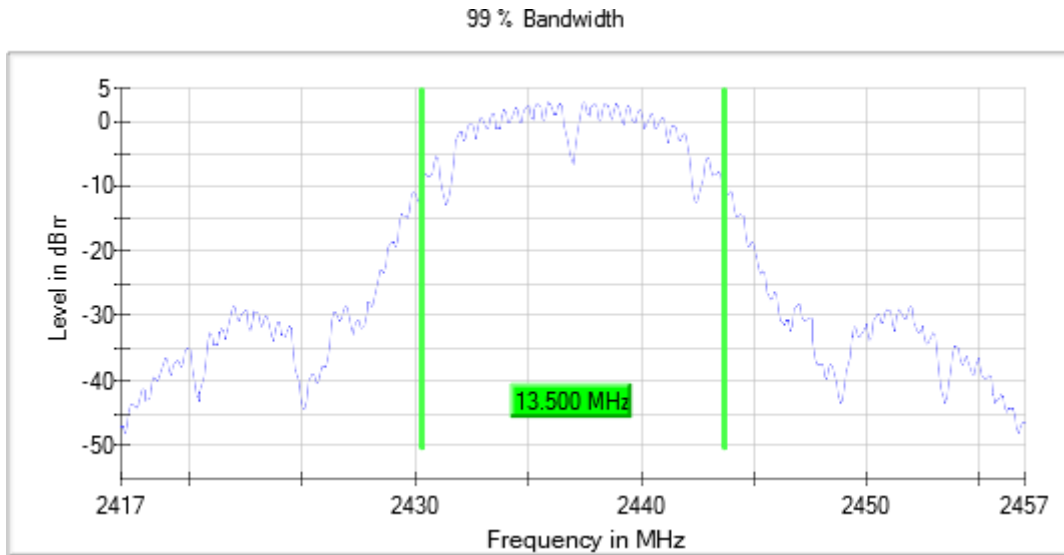



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2462.00000
 Antenna configuration: SISO Active Port = 1

Images:

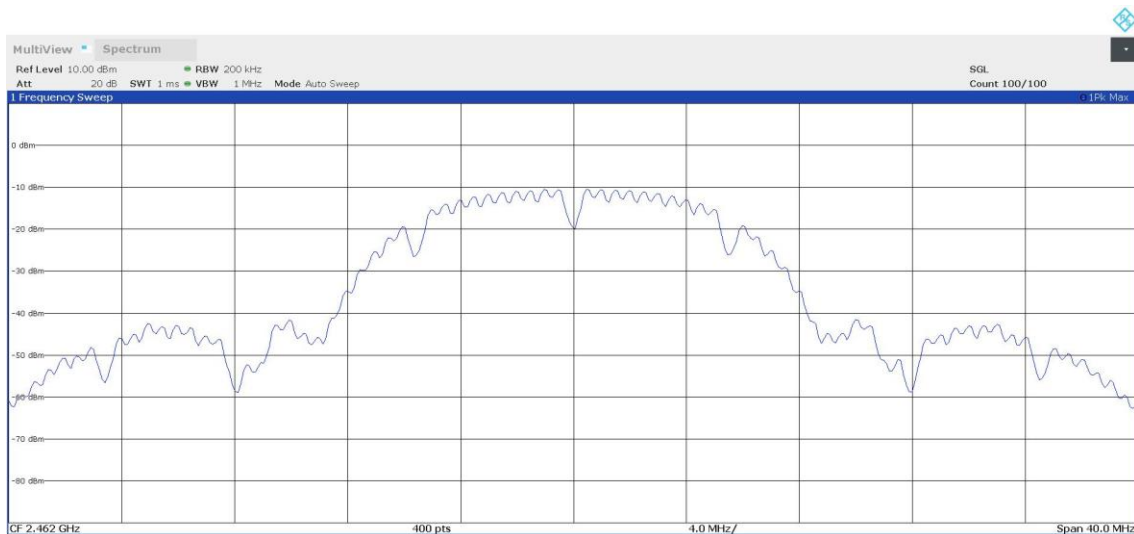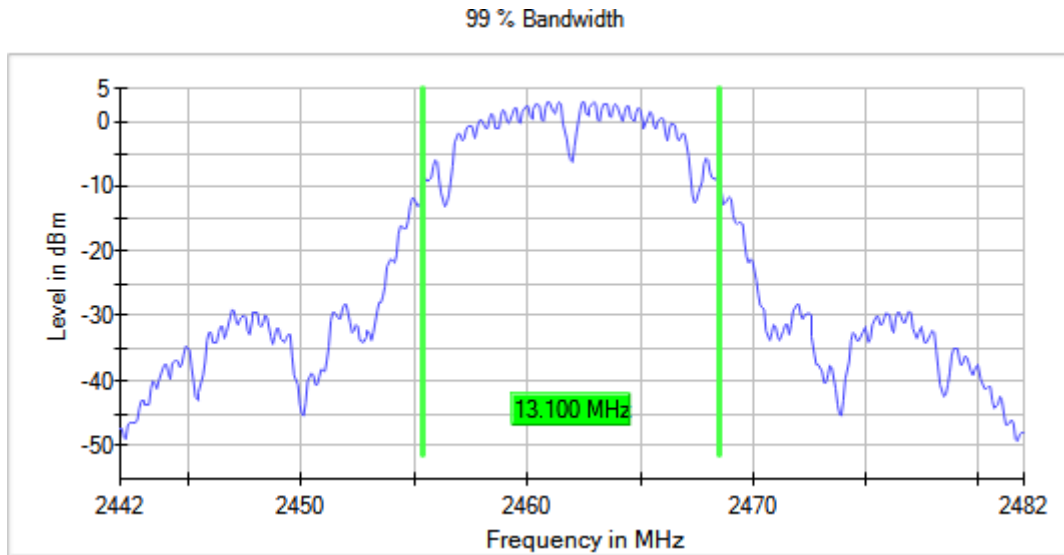



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2462.00000
Antenna configuration: SISO Active Port = 3

Images:

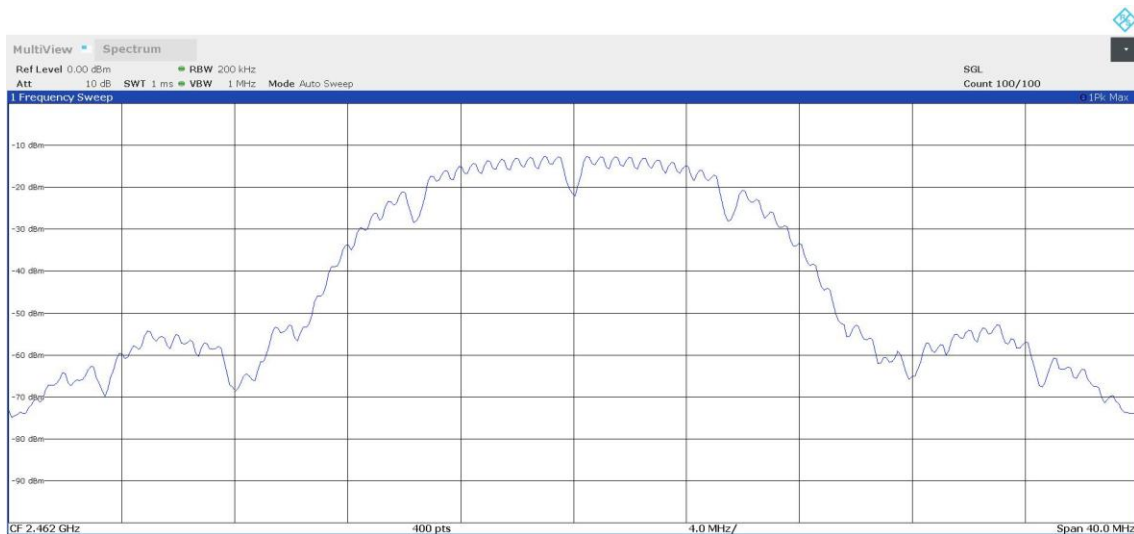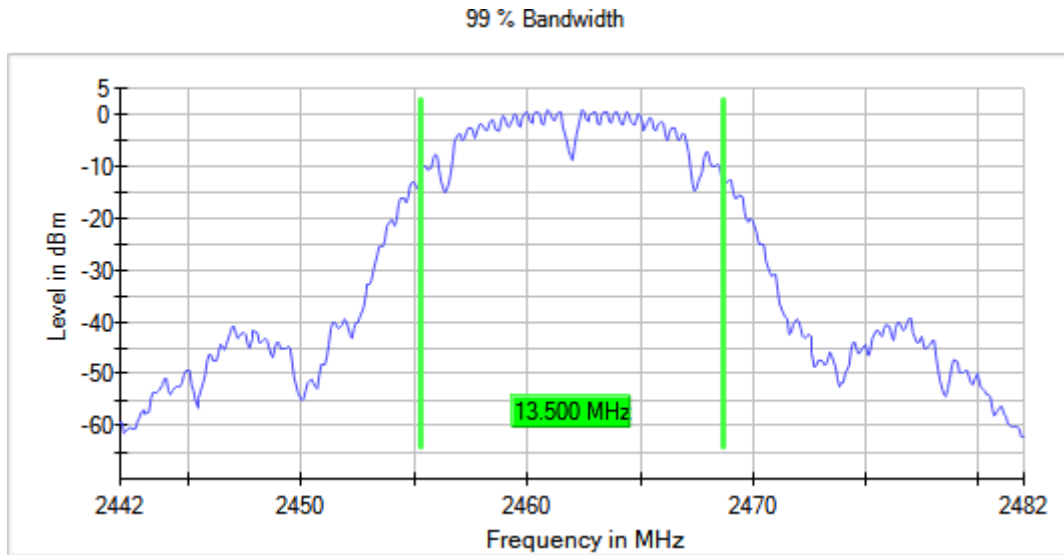

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11b (DSSS 1 Mbit/s) Frequency MHz = 2462.00000
 Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

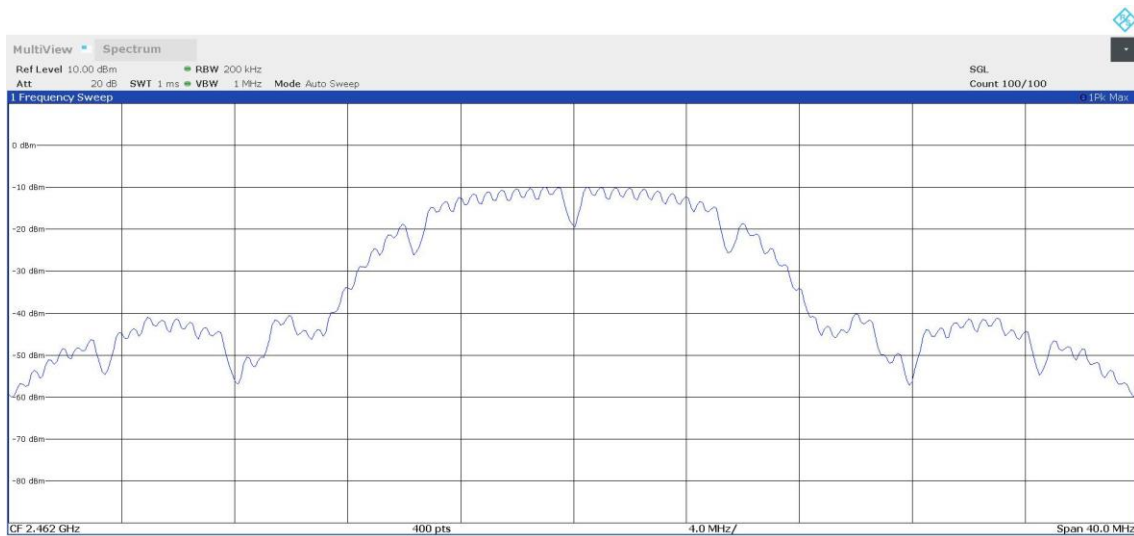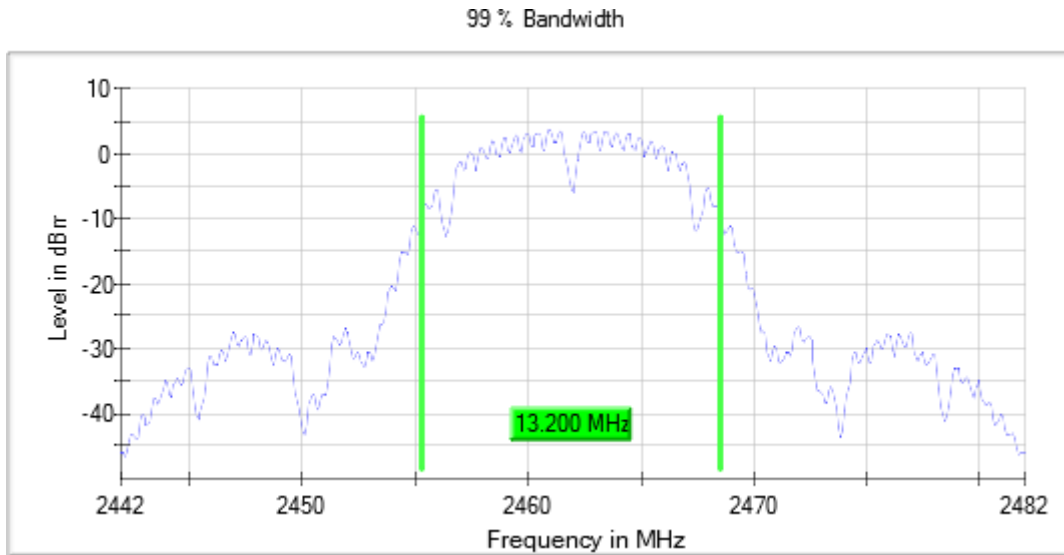

Modulation: 802.11g (OFDM 6 Mbit/s)
Antenna configuration: SISO (port 1 and port 3) & MIMO (ports 1+3)

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Digital Transmission System (DTS)	20	2412.00000	1	16.700
			3	16.700
			1+3	16.600
		2437.00000	1	17.000
			3	16.700
			1+3	17.000
		2462.00000	1	16.800
			3	16.700
			1+3	16.800



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2412.00000
 Antenna configuration: SISO Active Port = 1

Images:

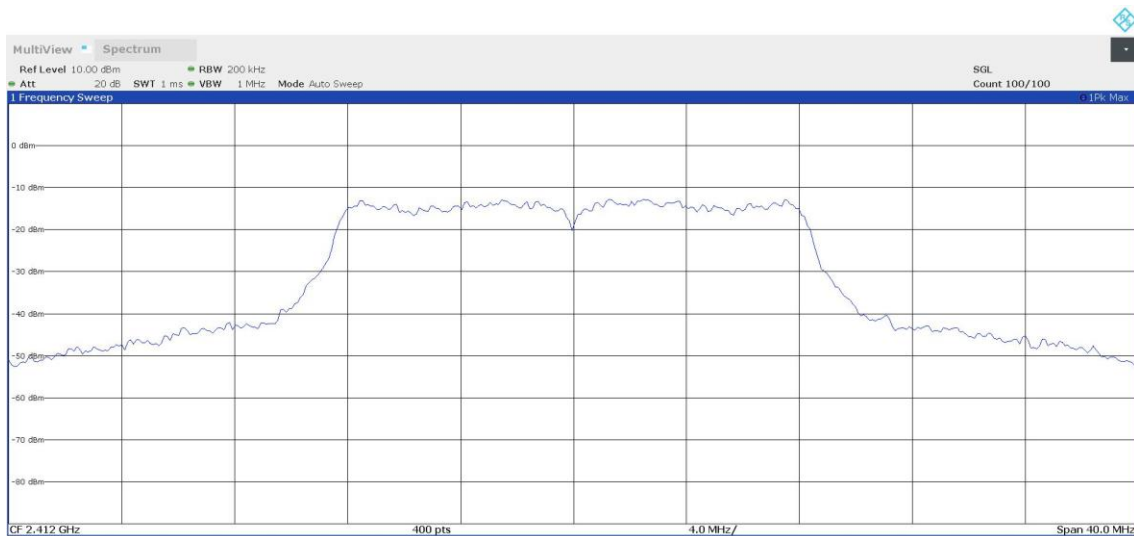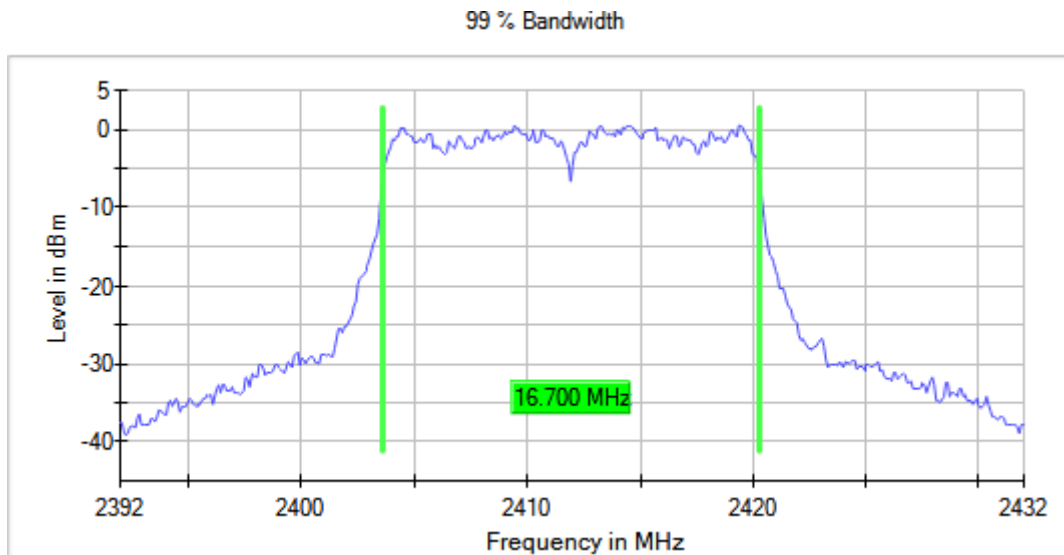



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2412.00000
Antenna configuration: SISO Active Port = 3

Images:

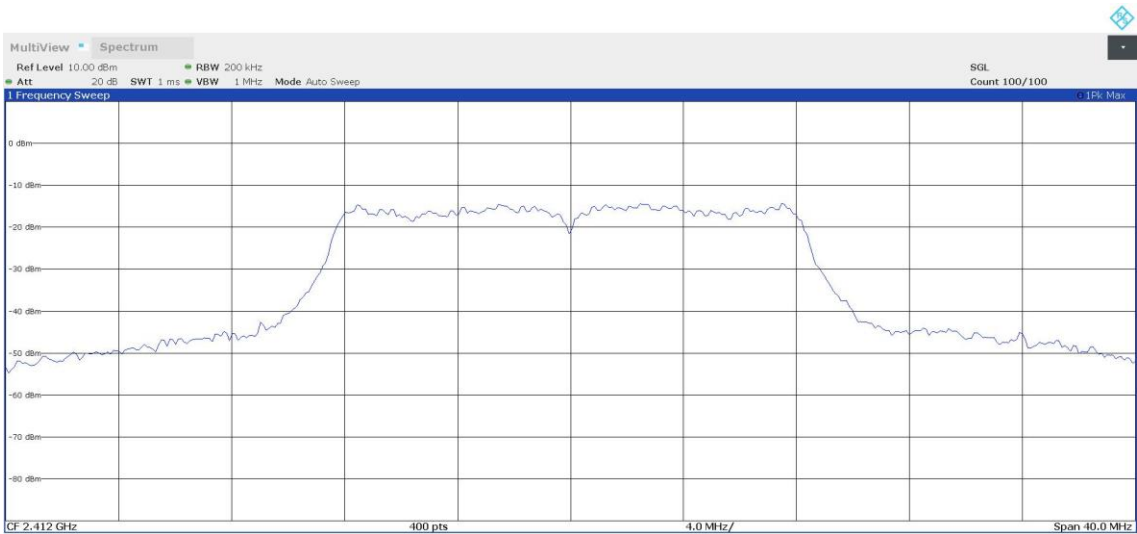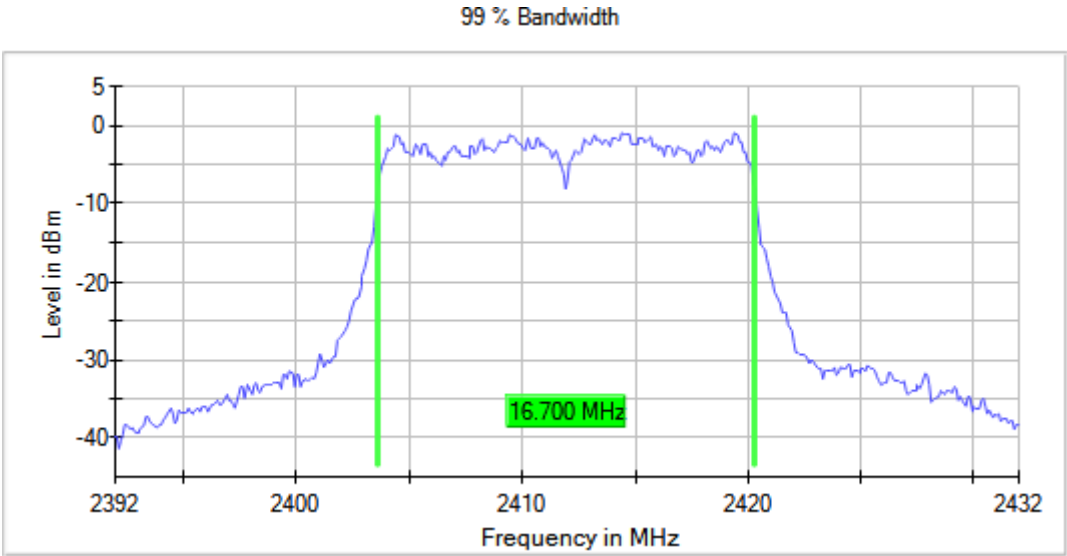



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2412.00000
Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

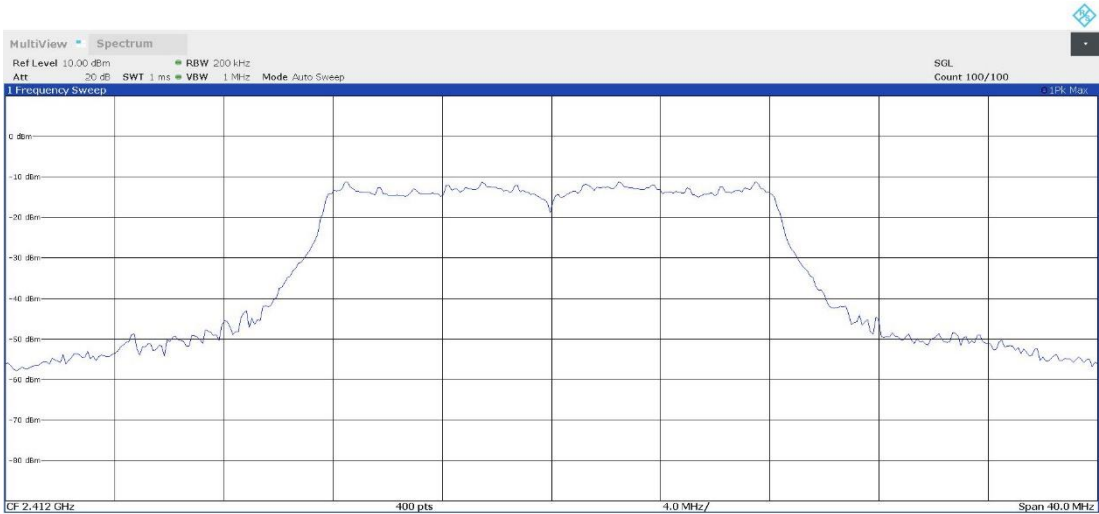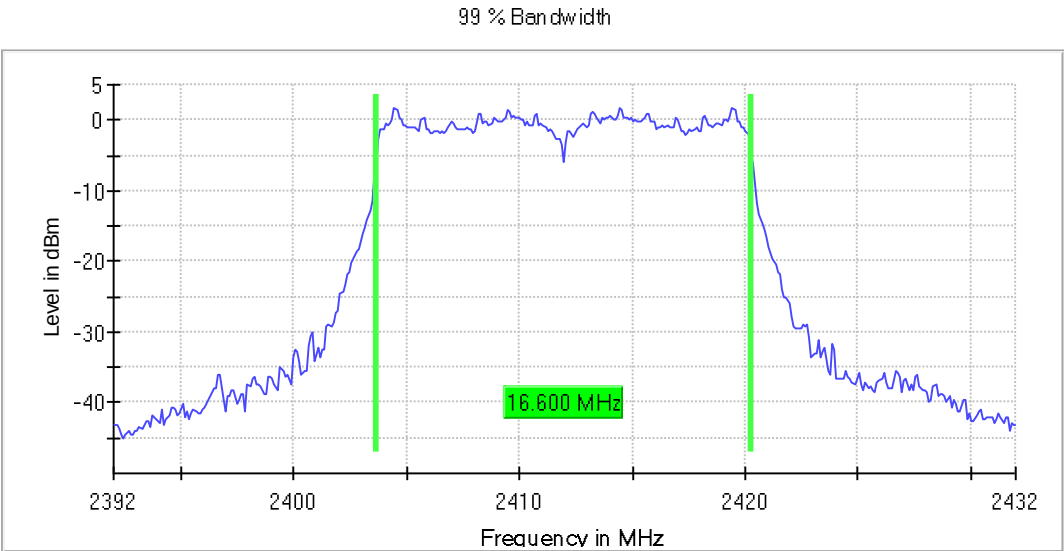



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration: SISO Active Port = 1

Images:

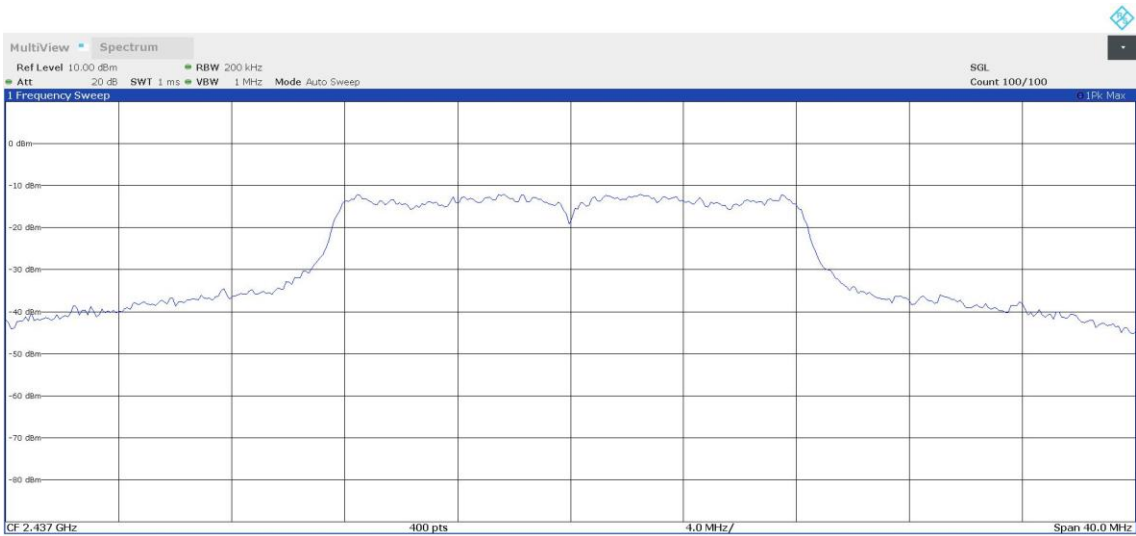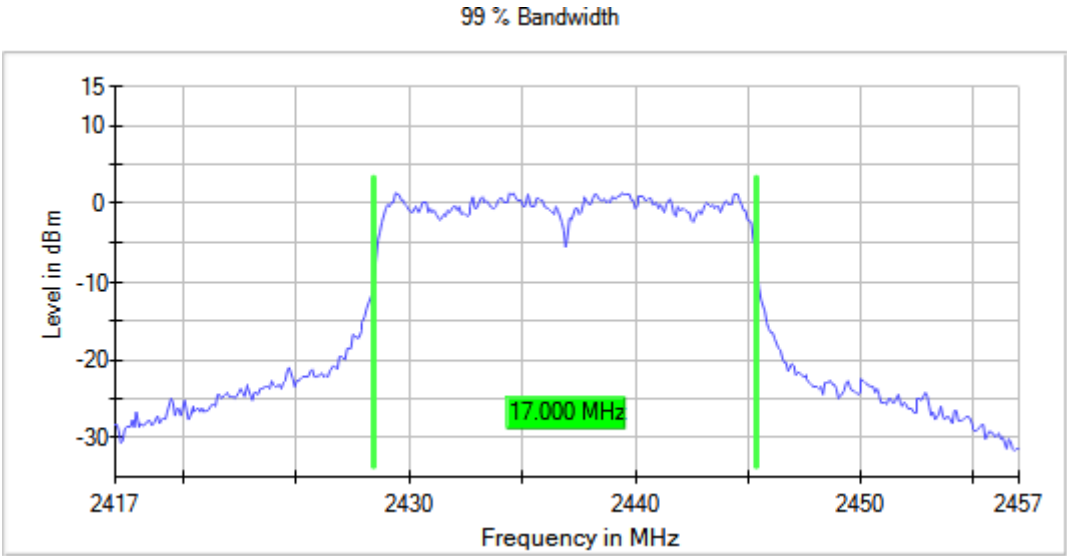



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration: SISO Active Port = 3

Images:

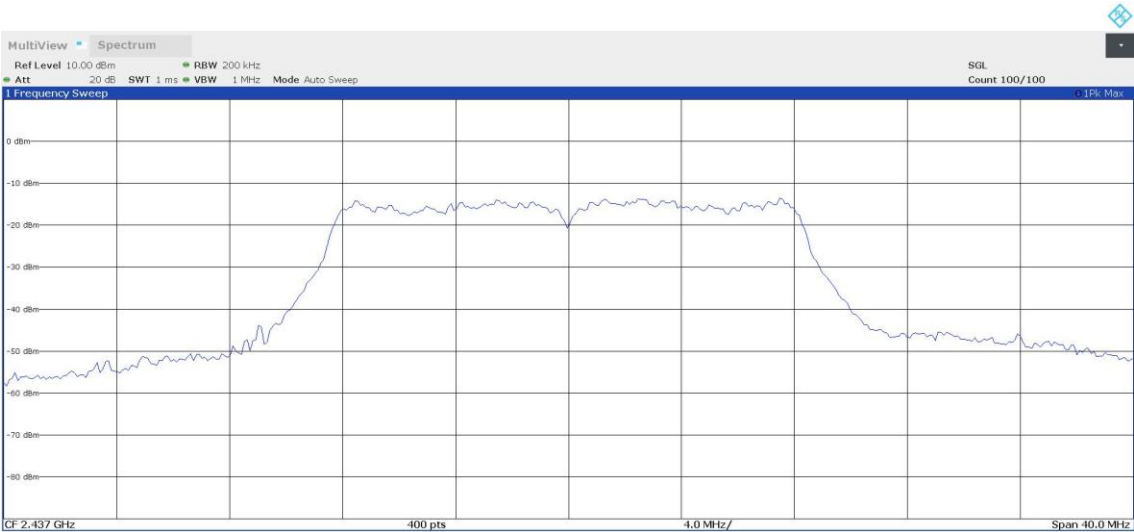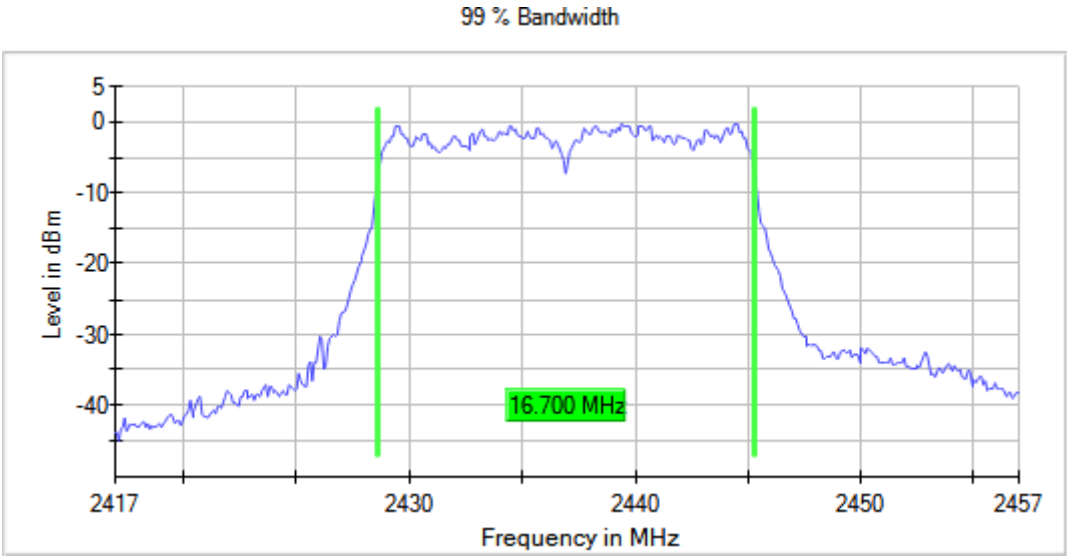



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

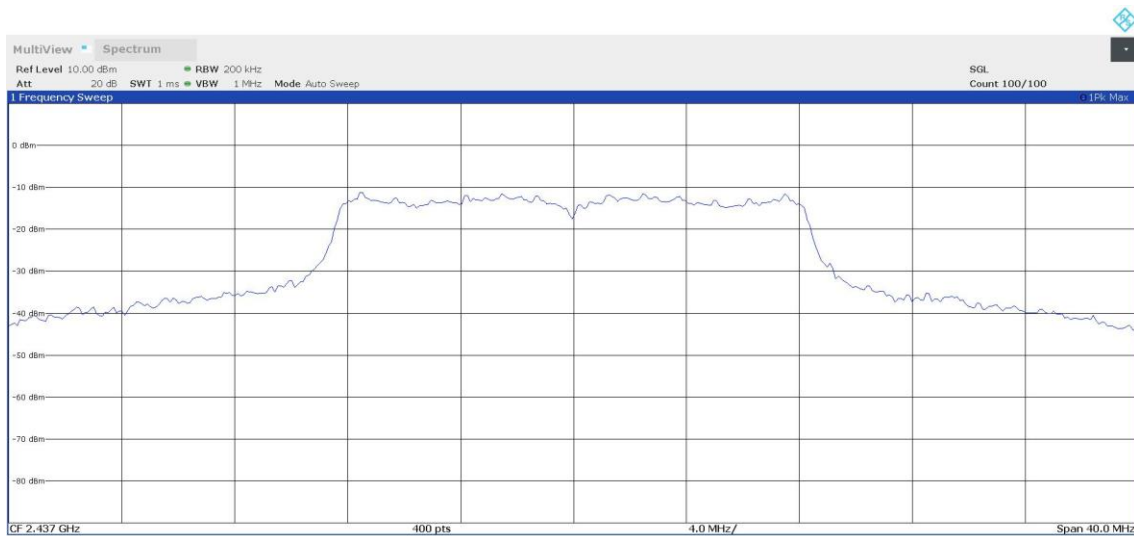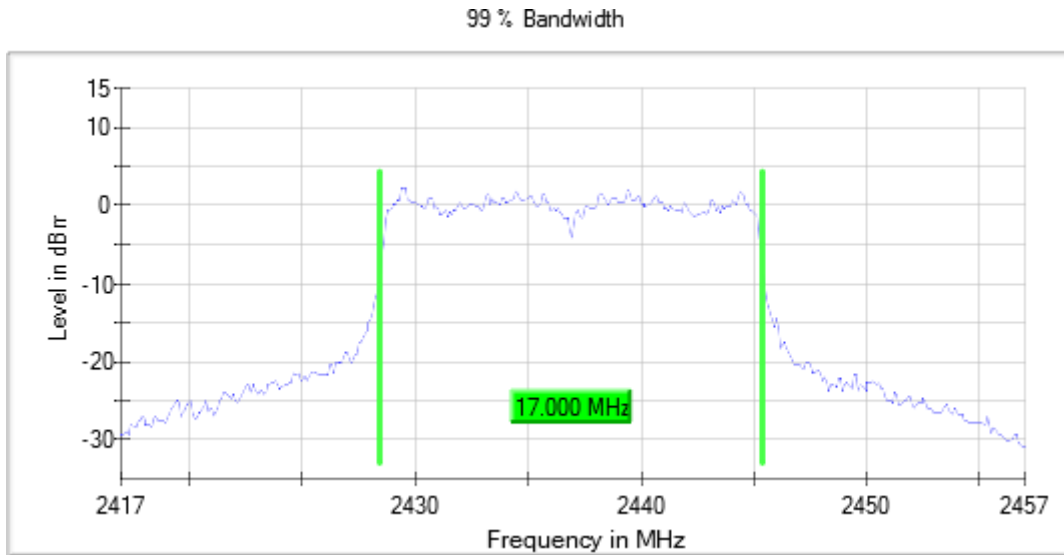



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2462.00000
Antenna configuration: SISO Active Port = 1

Images:

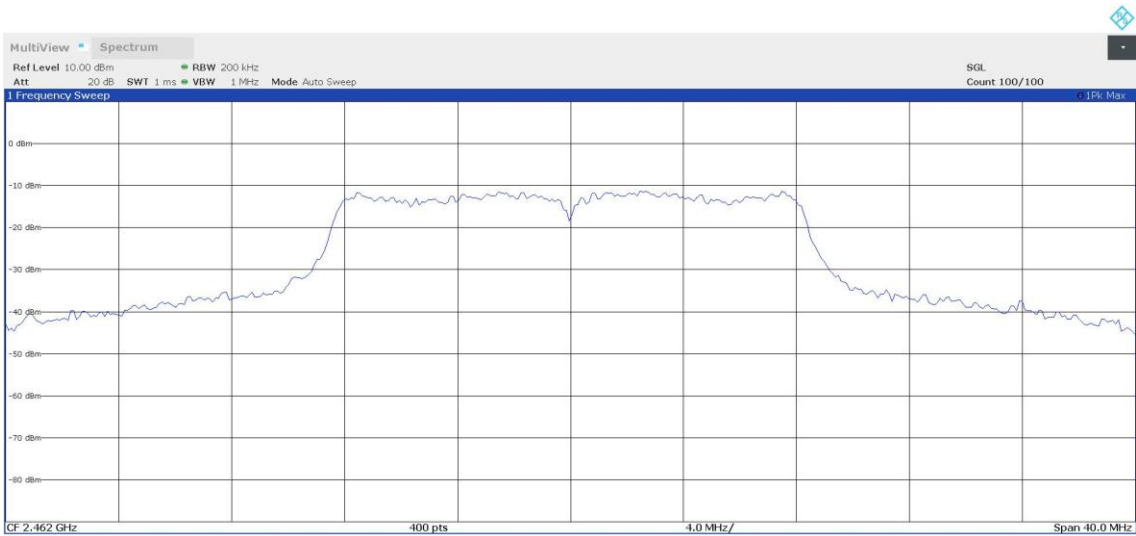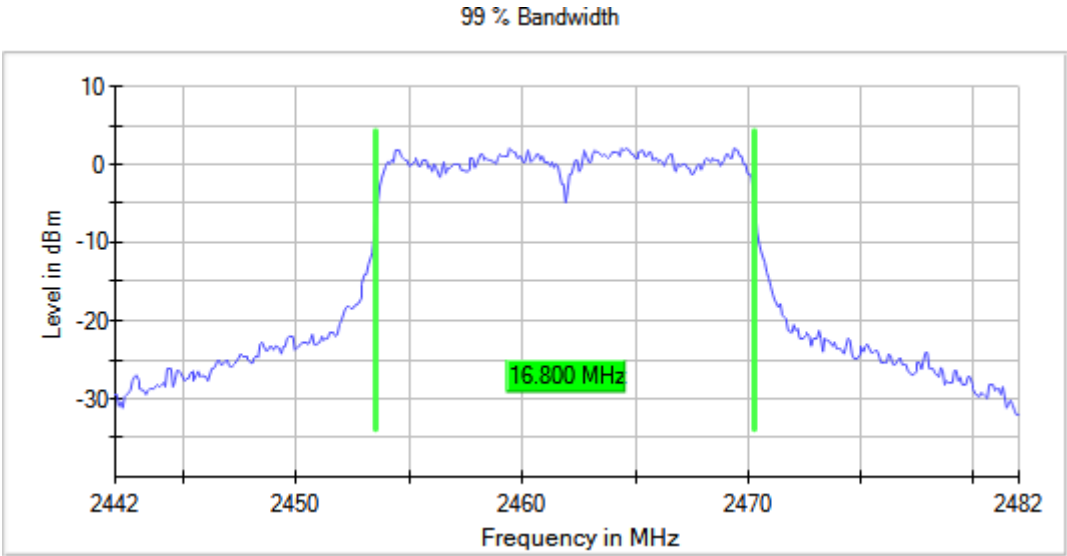



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2462.00000
Antenna configuration: SISO Active Port = 3

Images:

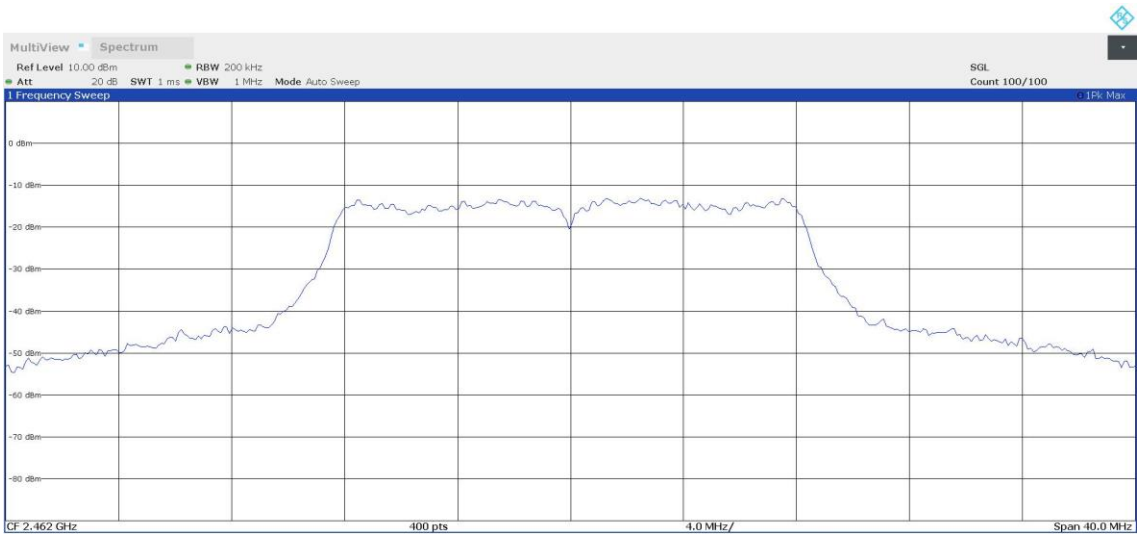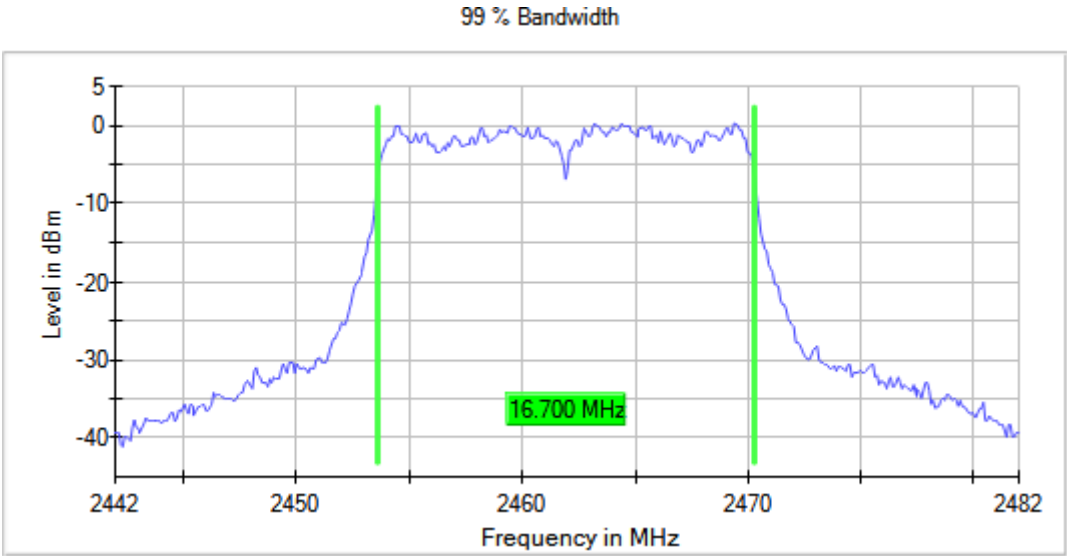

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11g (OFDM 6 Mbit/s) Frequency MHz = 2462.00000
Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

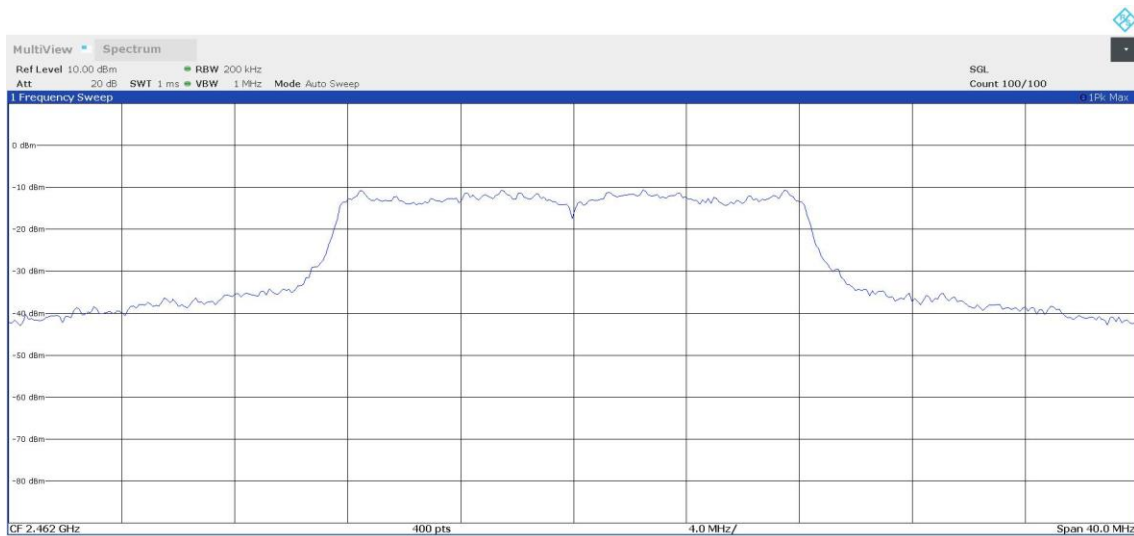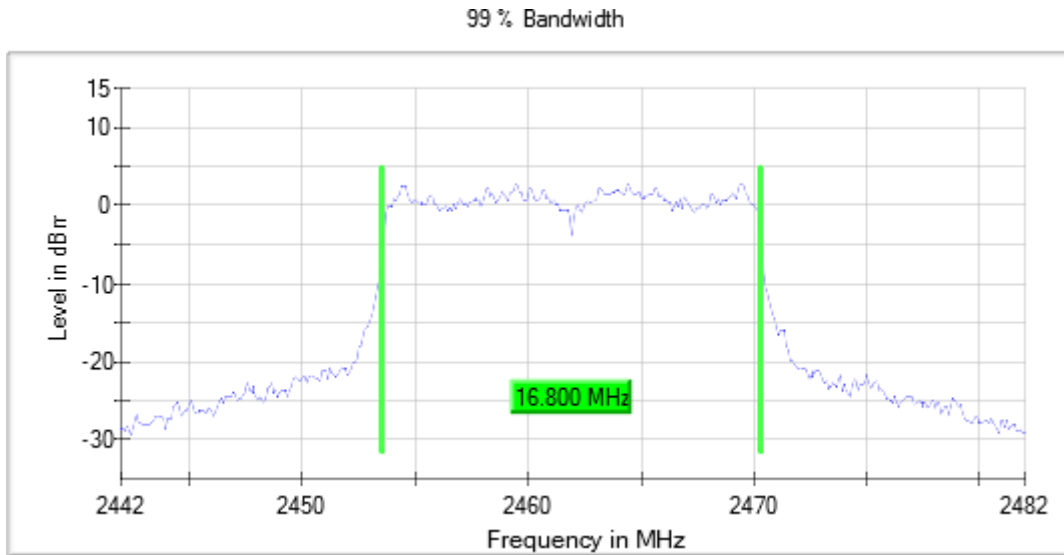

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)
Antenna configuration: SISO (port 1 and port 3) & MIMO (ports 1+3)
Results



Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Digital Transmission System (DTS)	20	2412.00000	1	17.700
			3	16.700
			1+3	17.600
		2437.00000	1	18.000
			3	17.700
			1+3	17.600
		2462.00000	1	17.900
			3	17.700
			1+3	17.600

Verdict
Pass

Attachments



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s) Frequency MHz = 2412.00000
 Antenna configuration: SISO Active Port = 1

Images:

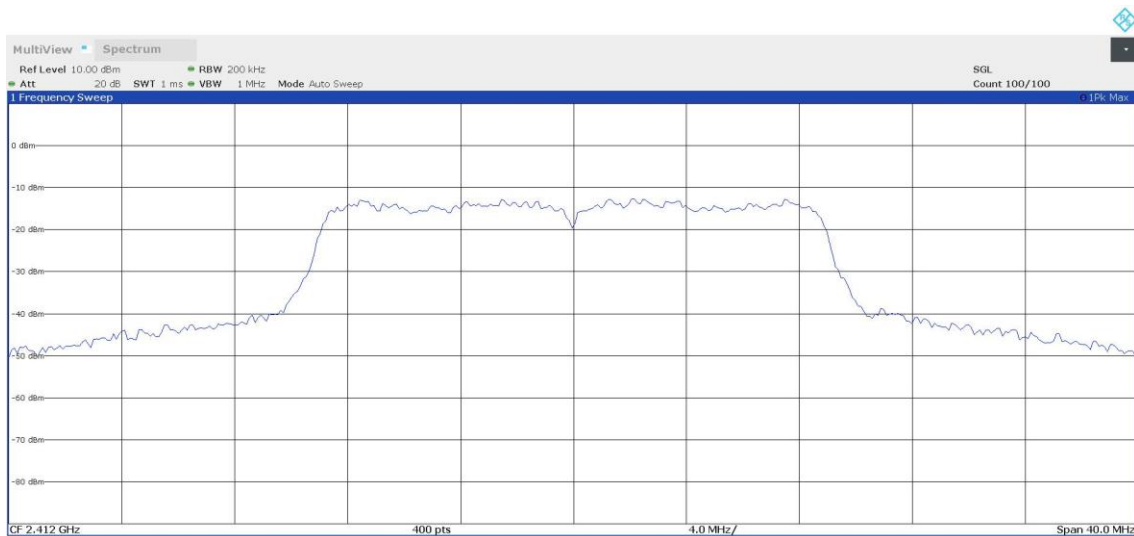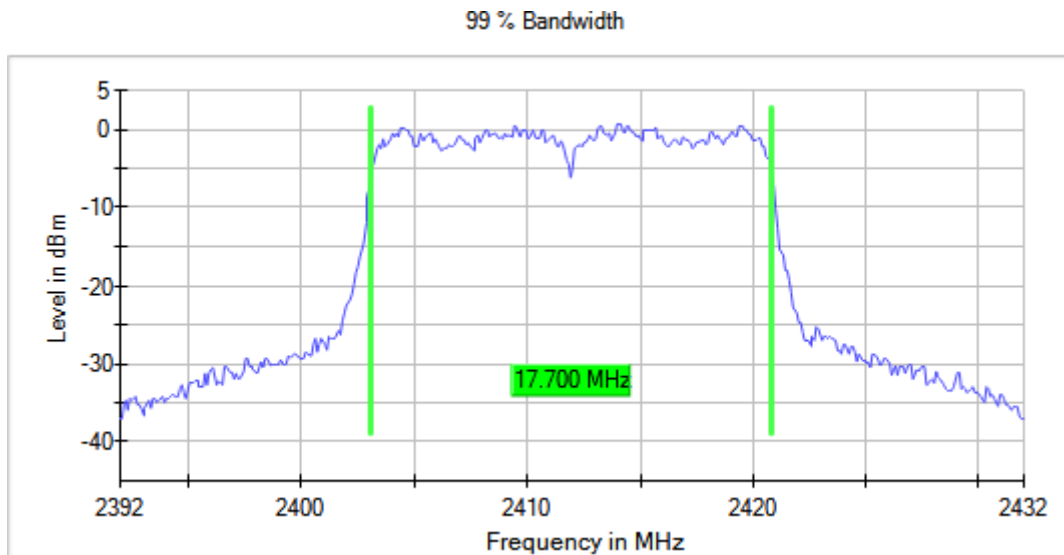



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s) Frequency MHz = 2412.00000
Antenna configuration: SISO Active Port = 3

Images:

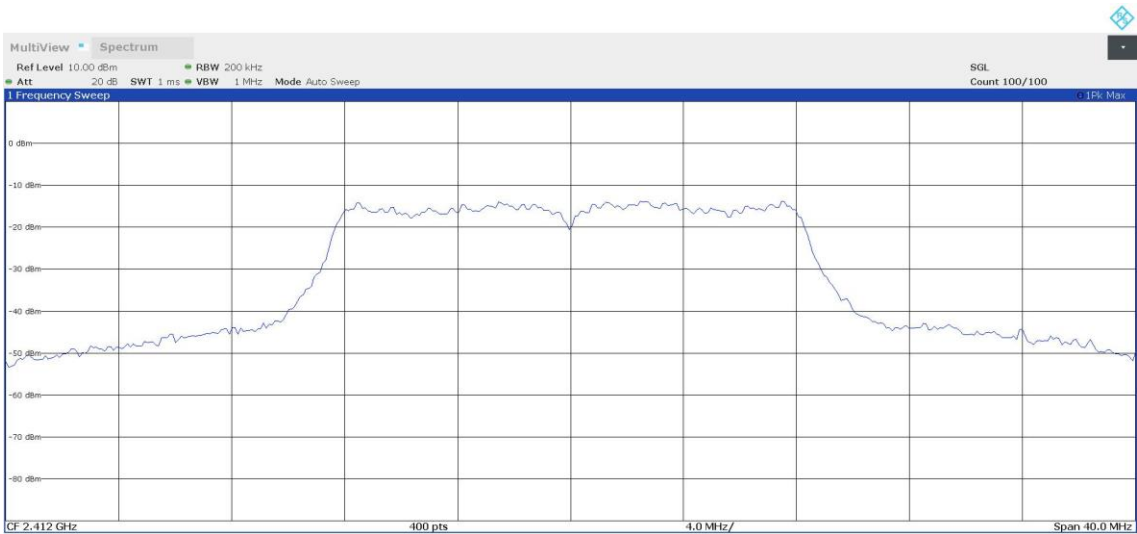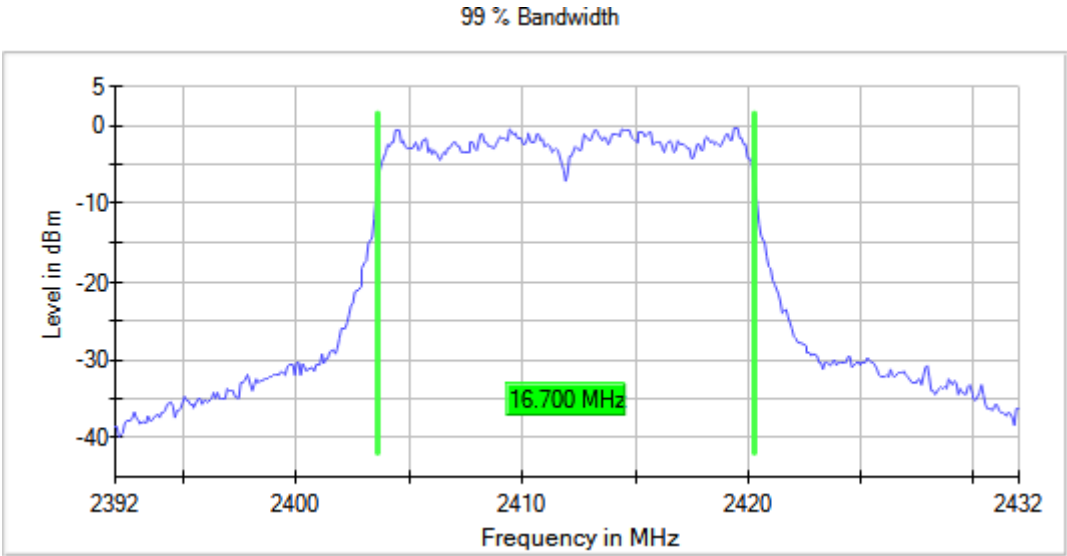

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
 Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s) Frequency MHz = 2412.00000
 Antenna configuration = MIMO CDD Mode 2x2 Active Port = 1+3

Images:

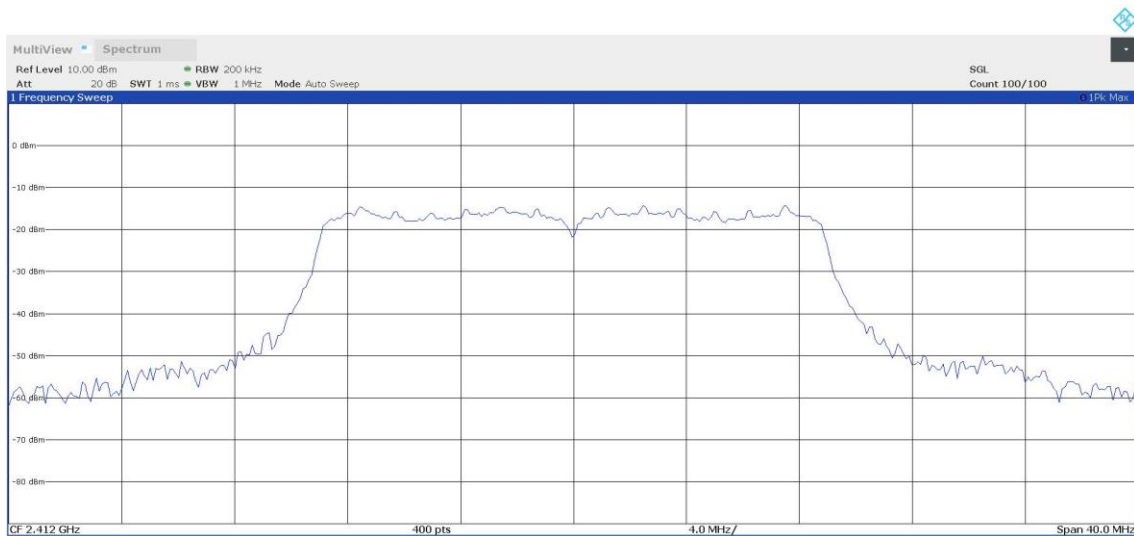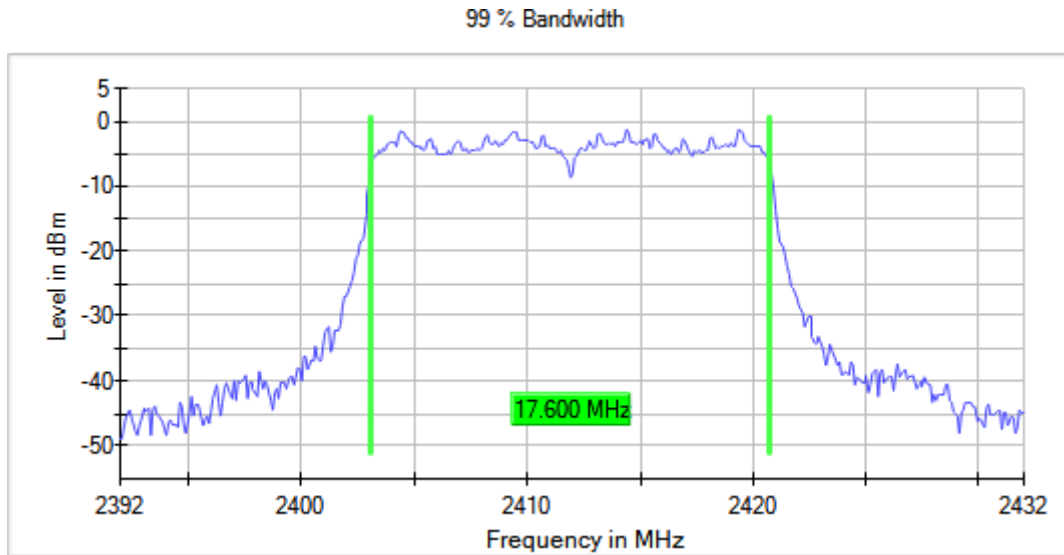

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 20
Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s) Frequency MHz = 2437.00000
Antenna configuration: SISO Active Port = 1

Images:

