


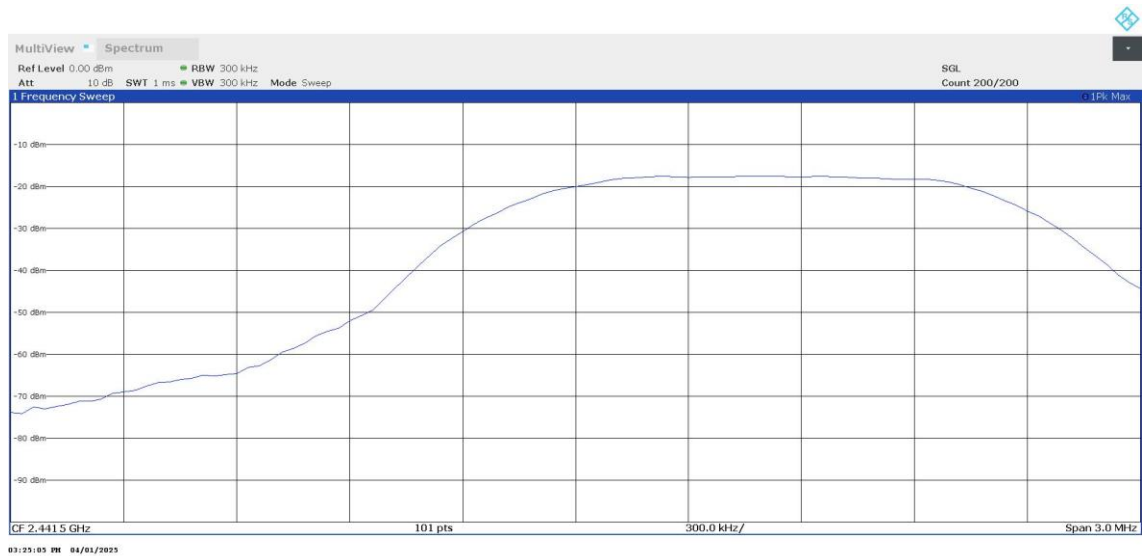

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy
(Dwell Time)

Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels
The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = 0.4 x 79= 31.6 seconds.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	107	309.310
		2441.00000	105	303.540
		2480.00000	111	320.830

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

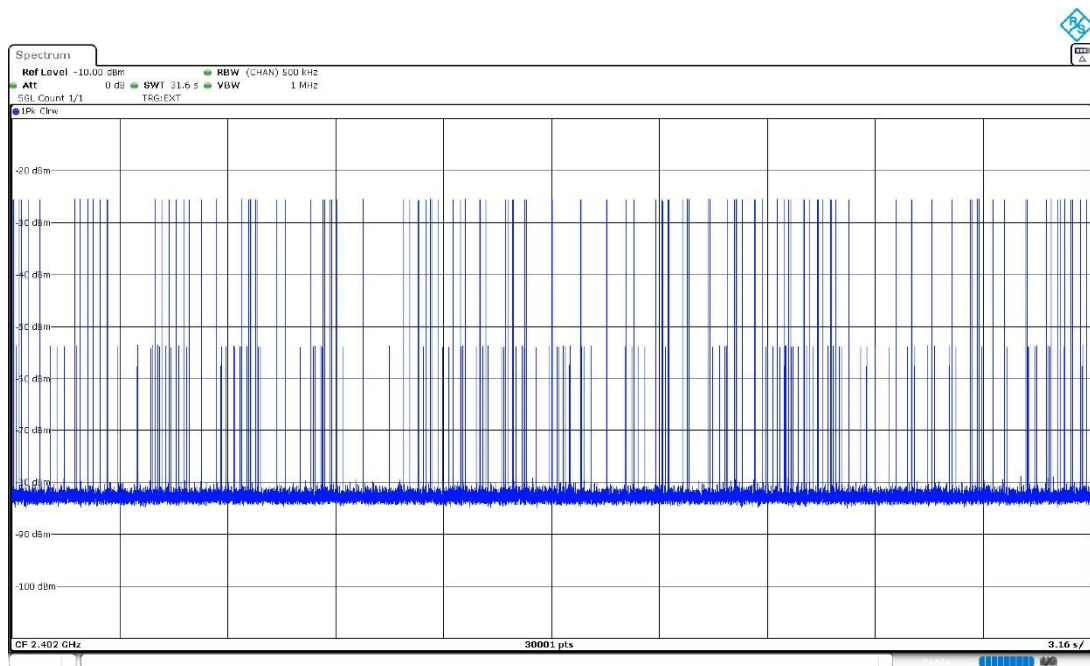
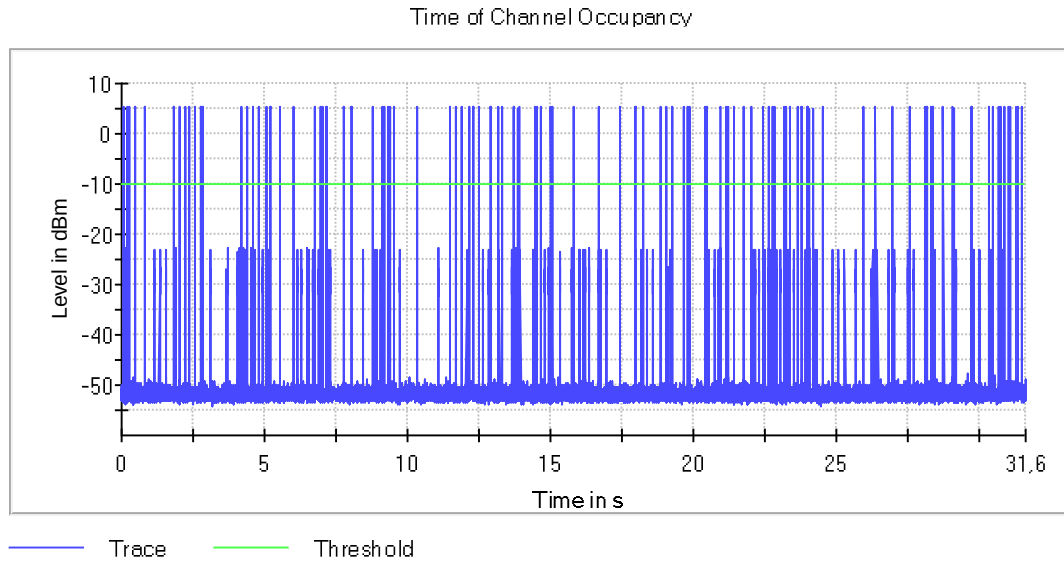


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

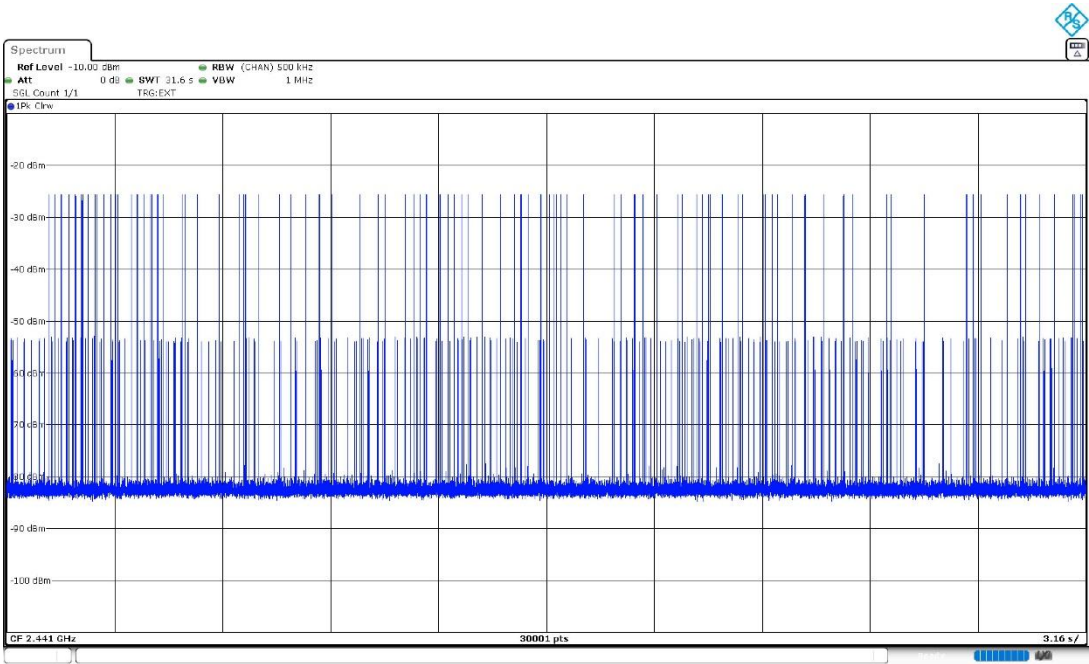
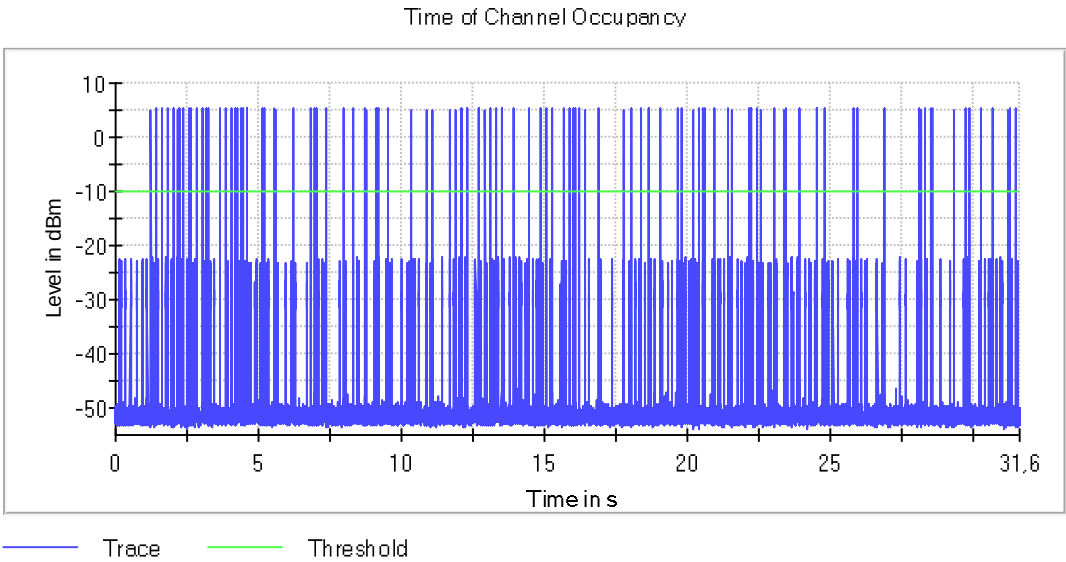


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

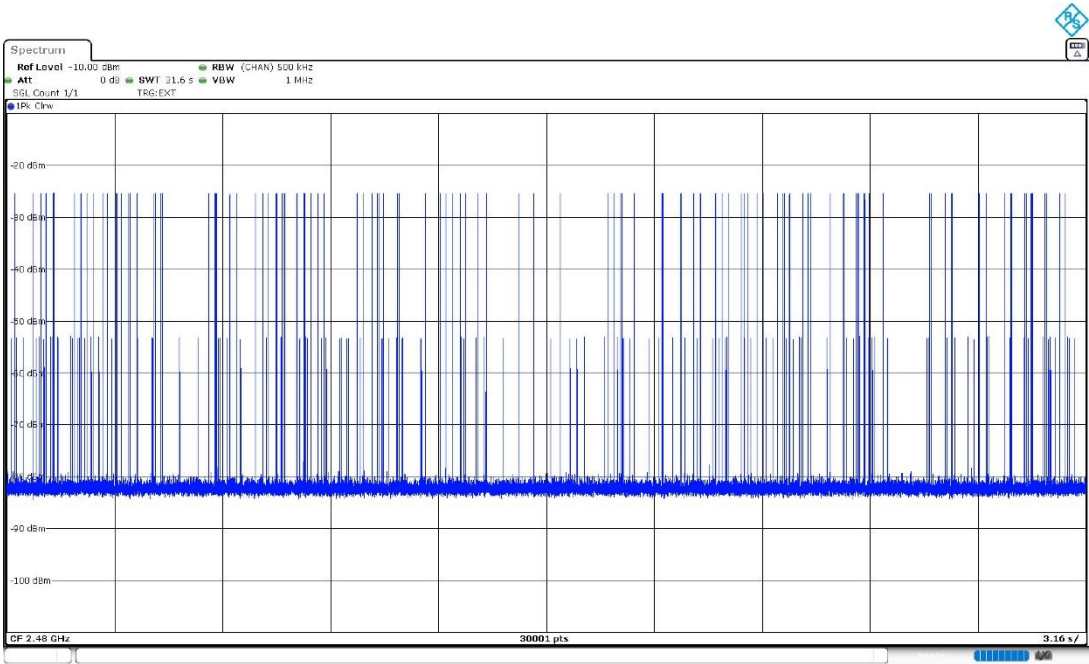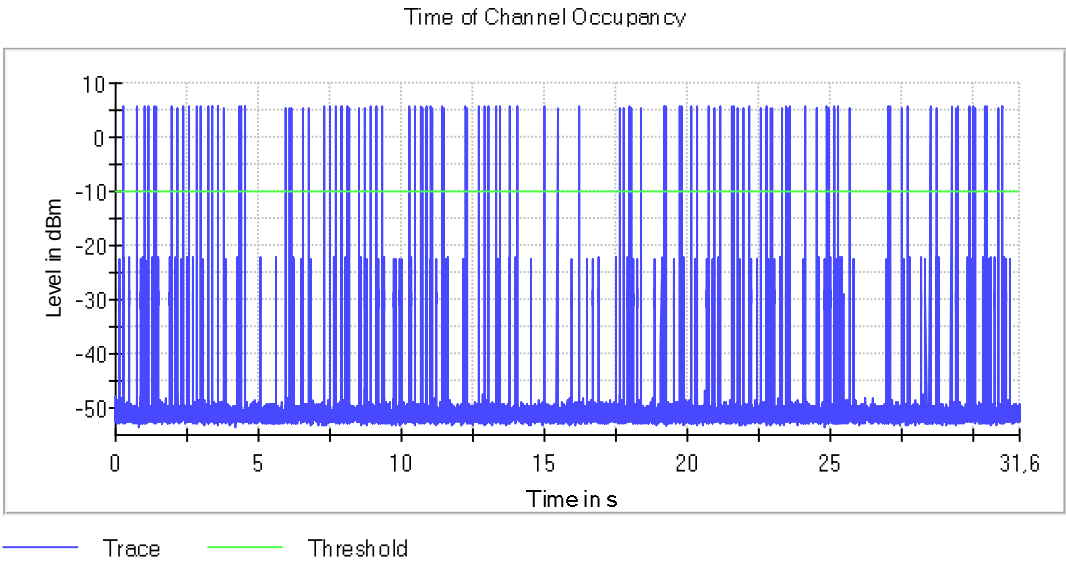

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	115	325.420
		2441.00000	100	282.500
		2480.00000	102	288.000

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

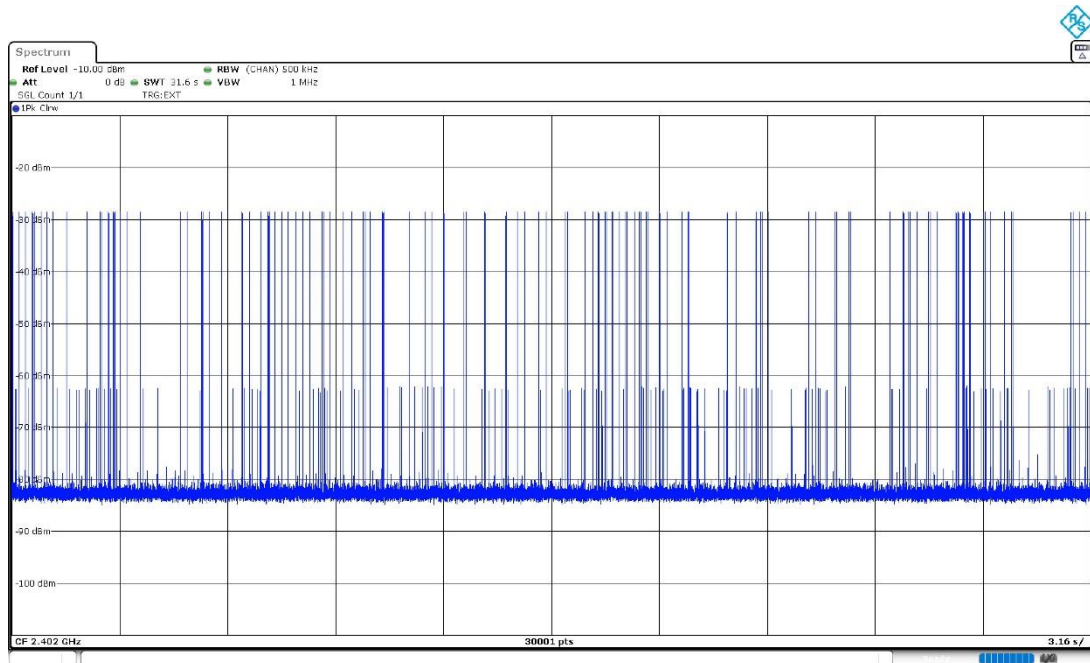
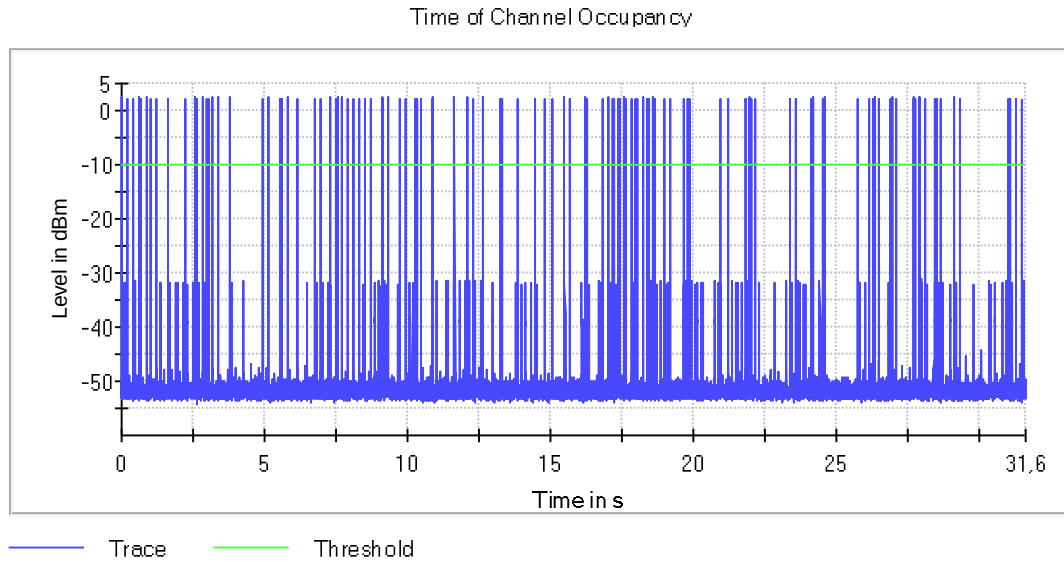


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

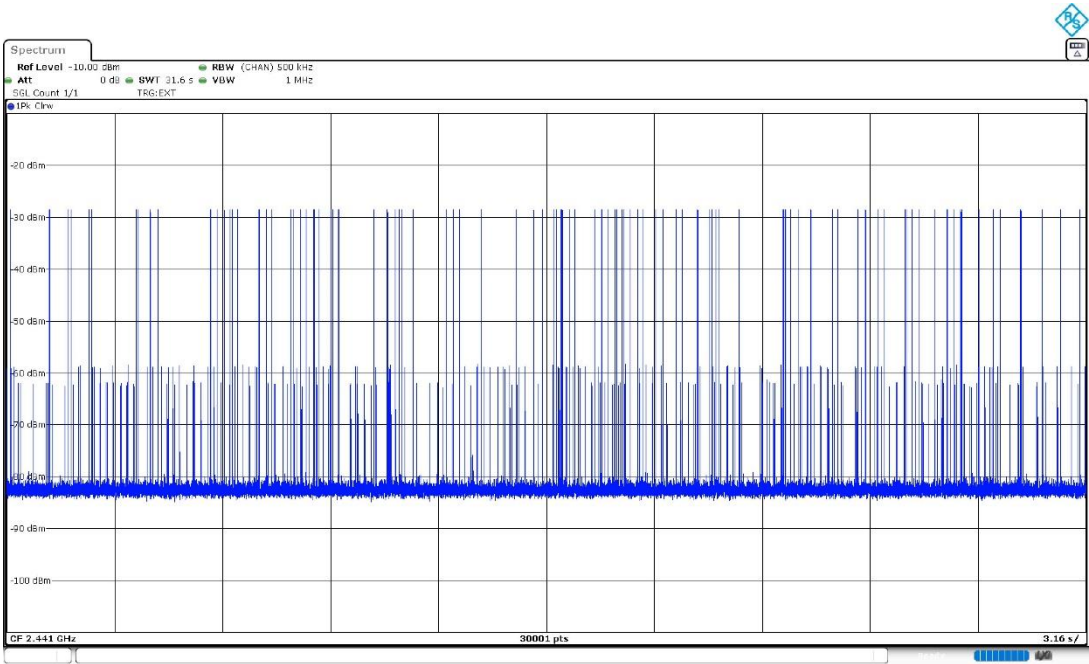
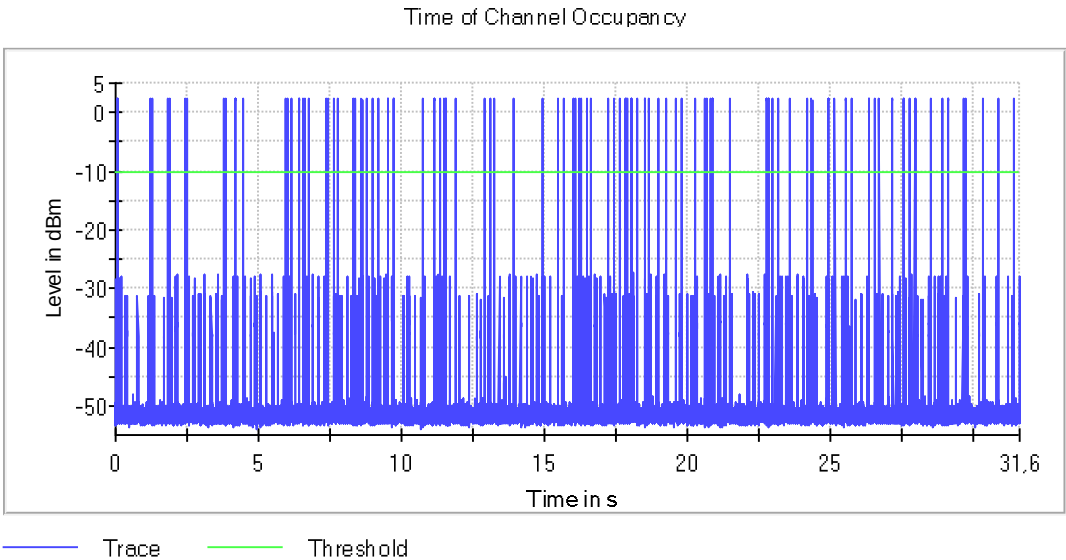


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
Sweeptime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

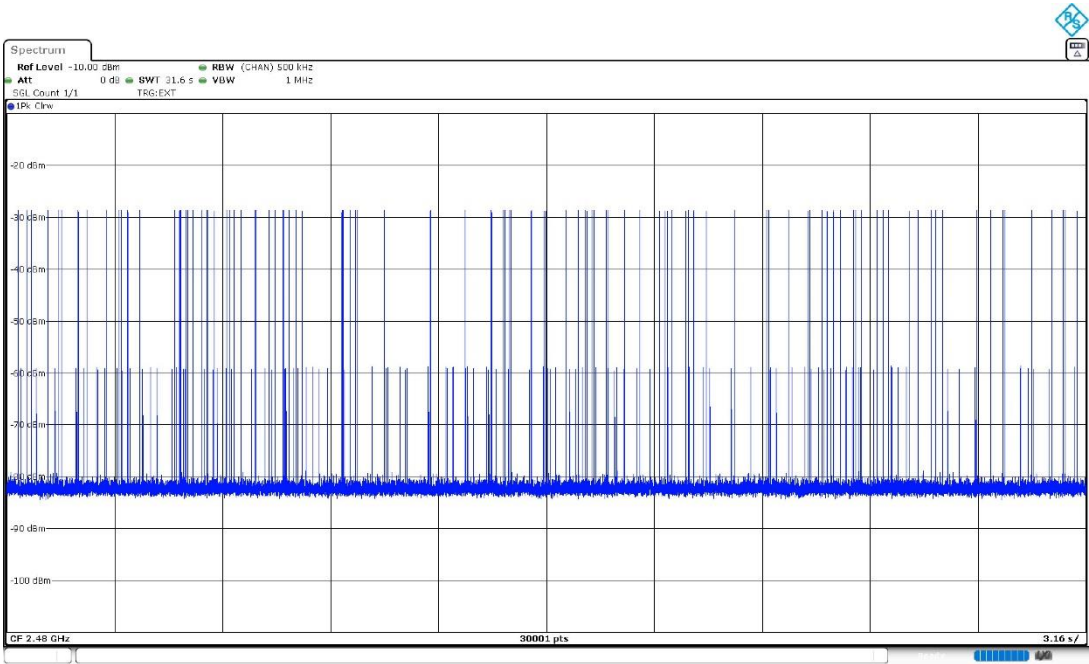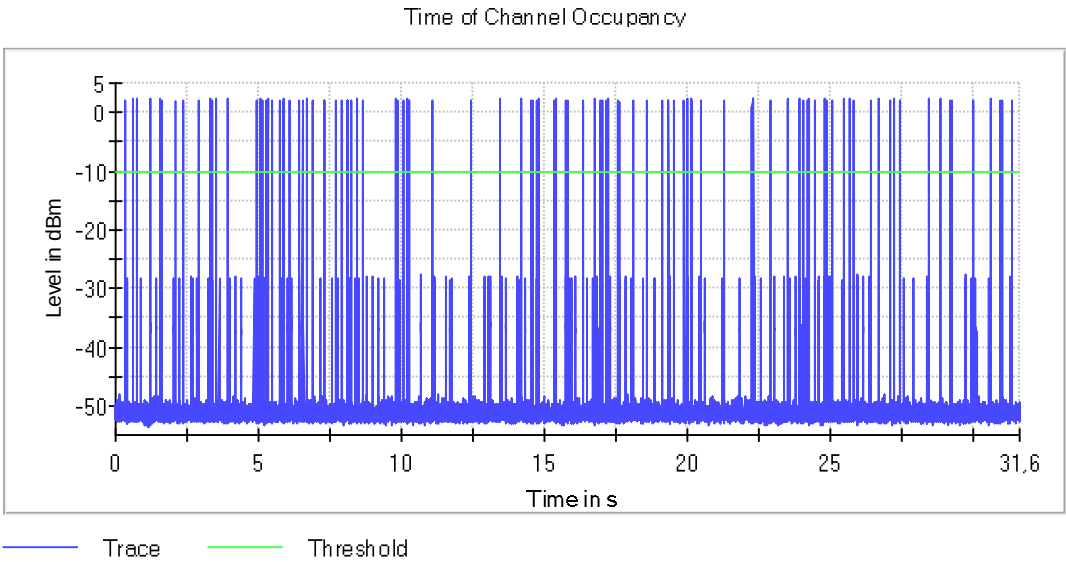

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	Port	Freq (MHz)	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	114	321.460
		2441.00000	126	357.360
		2480.00000	99	283.270



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

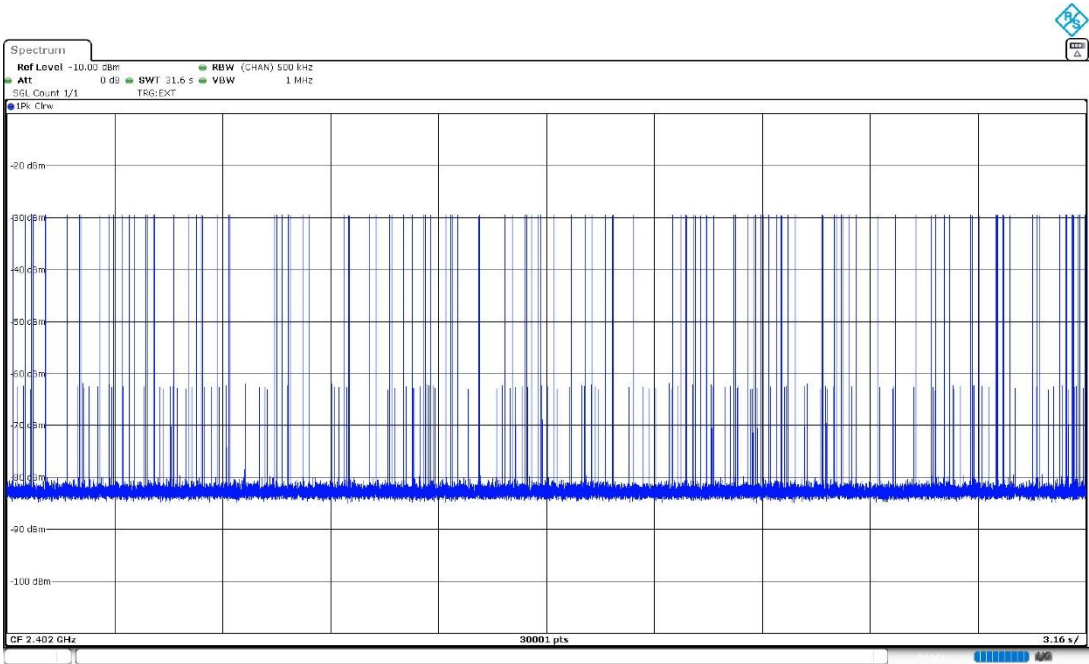
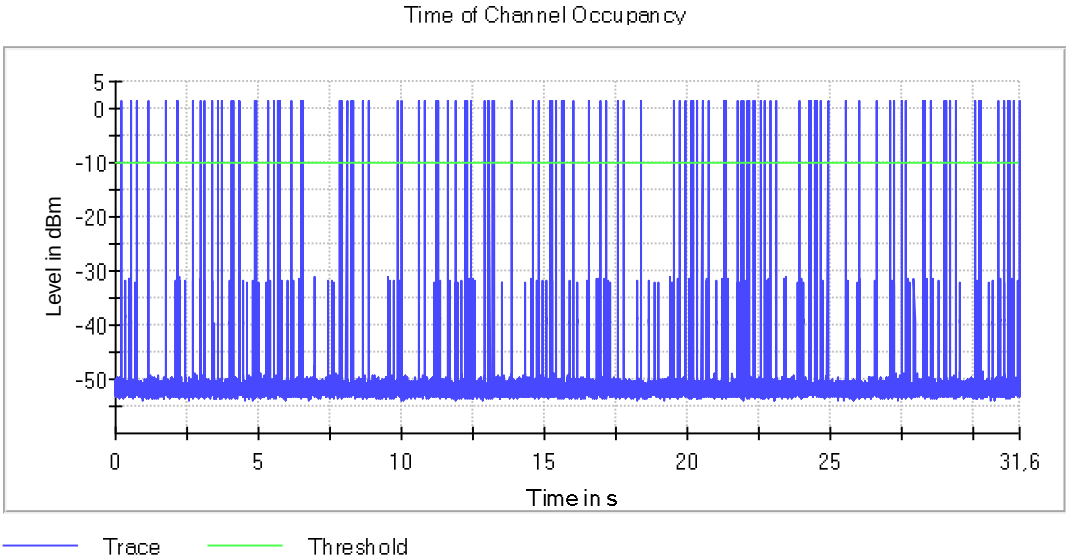


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

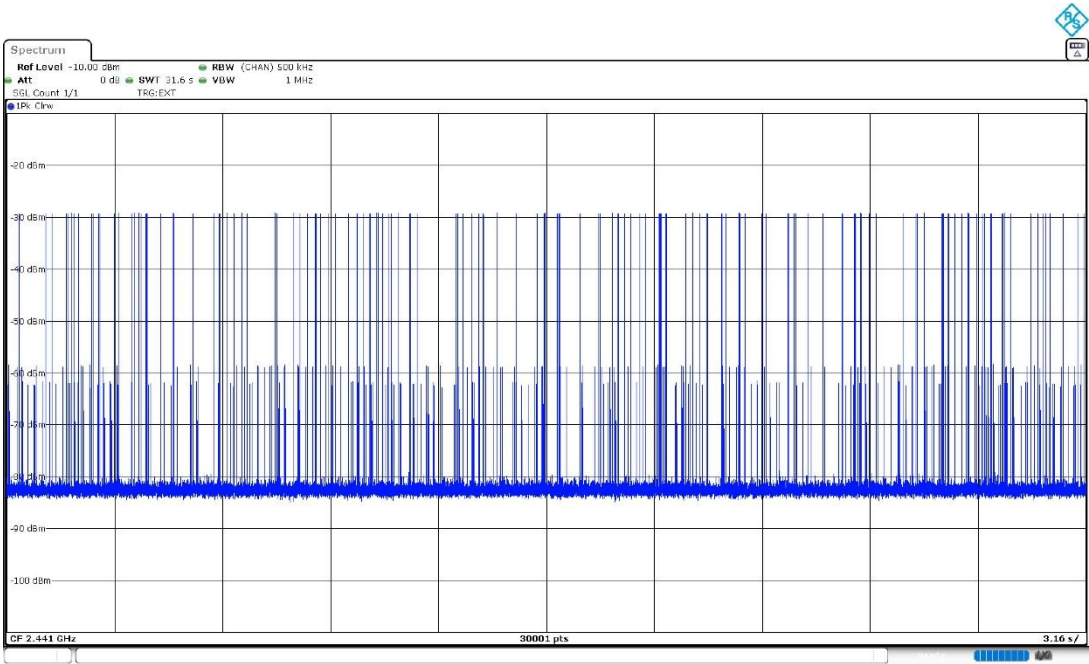
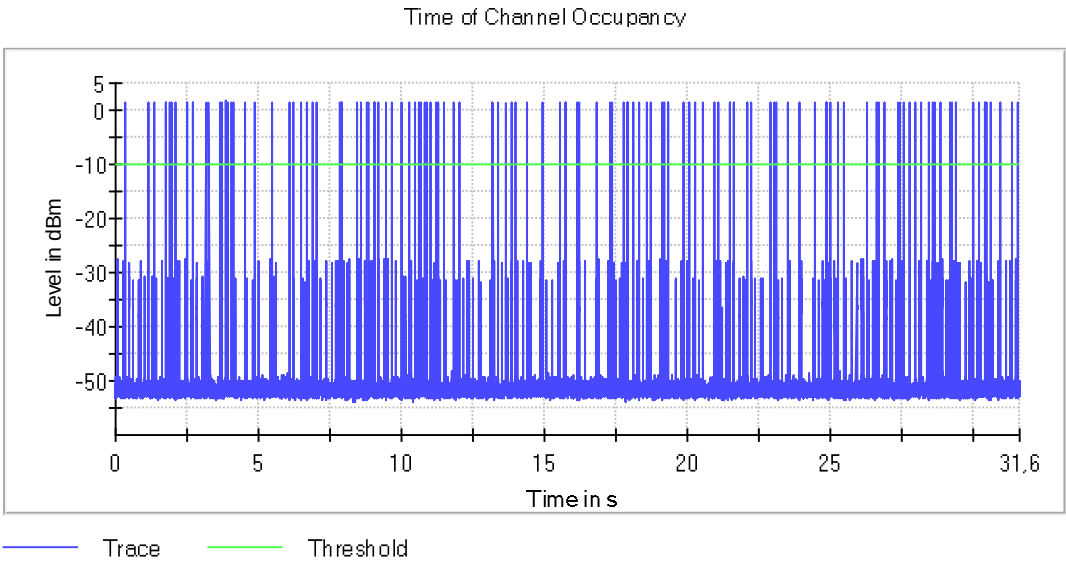


Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	31.600 s	31.600 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

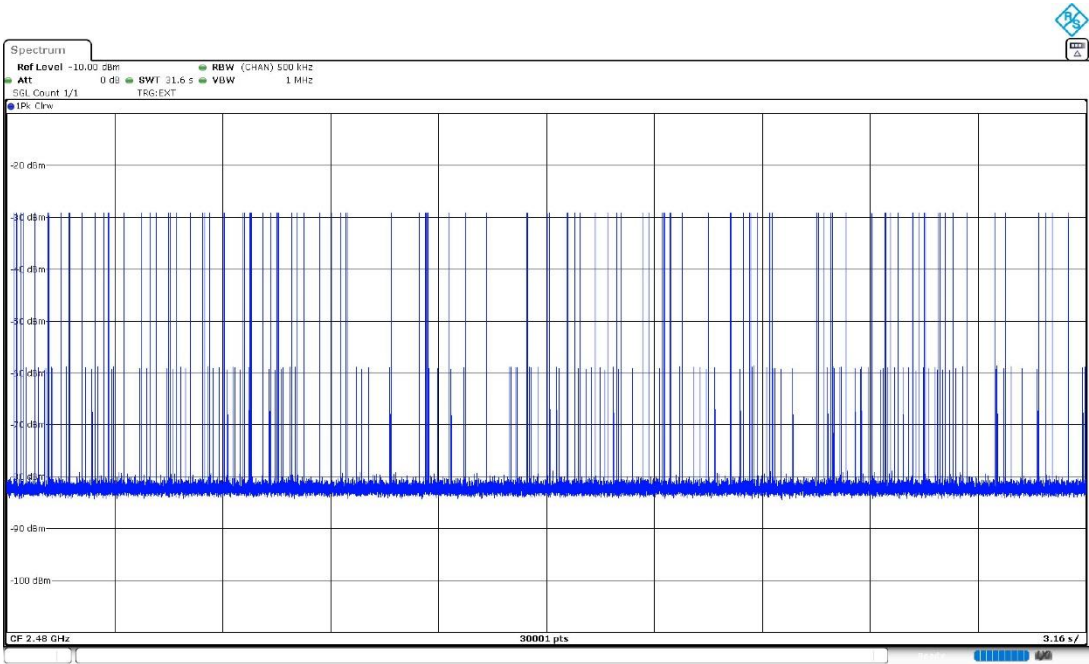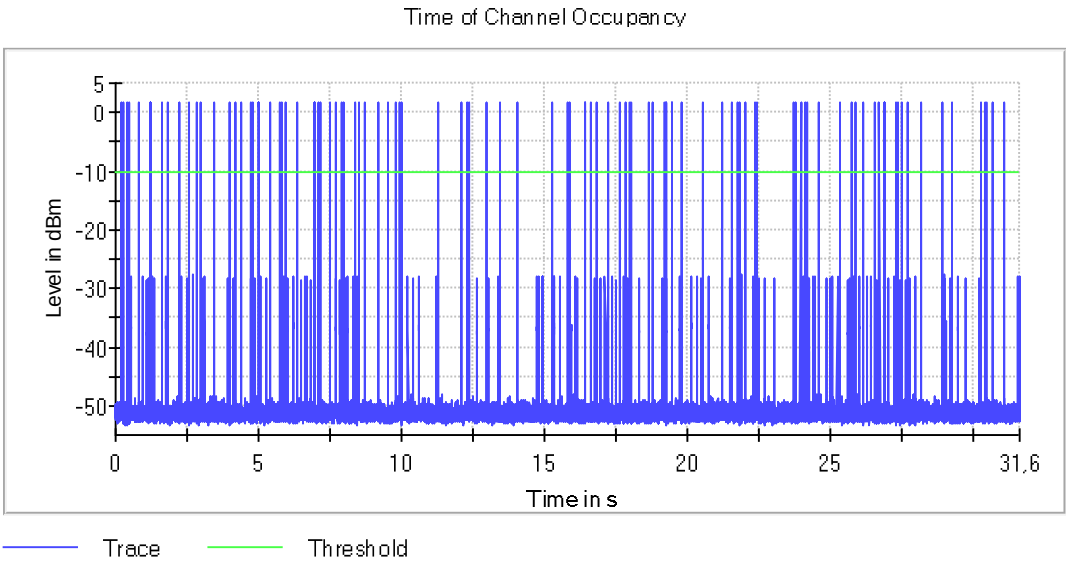

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Center Frequency	2.40200 GHz	2.40200 GHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
Sweeptime	Sweeptime	31.600 s
Reference Level	Reference Level	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (GFSK 1-DH5)

Images:

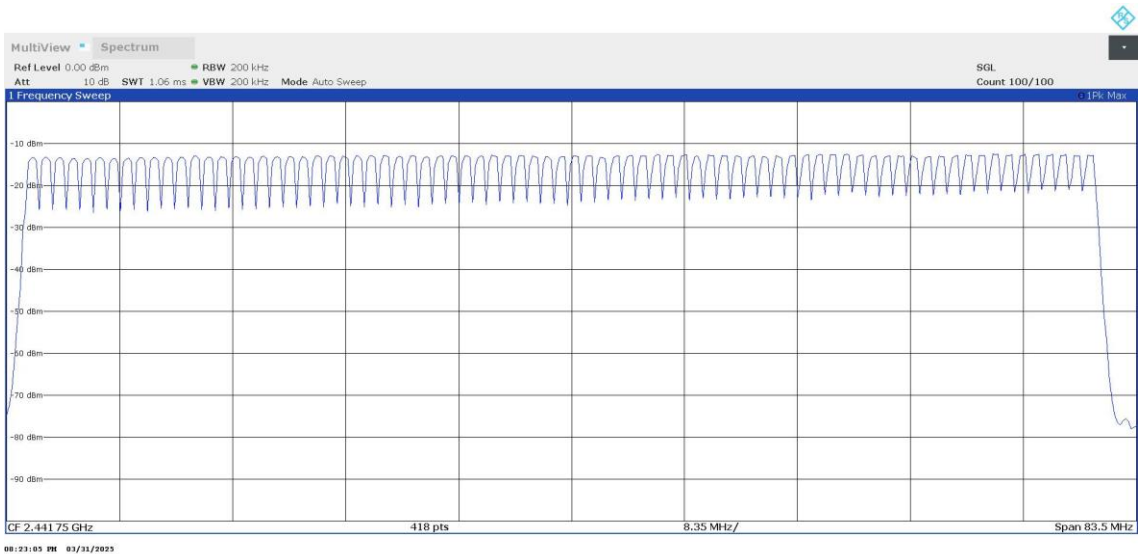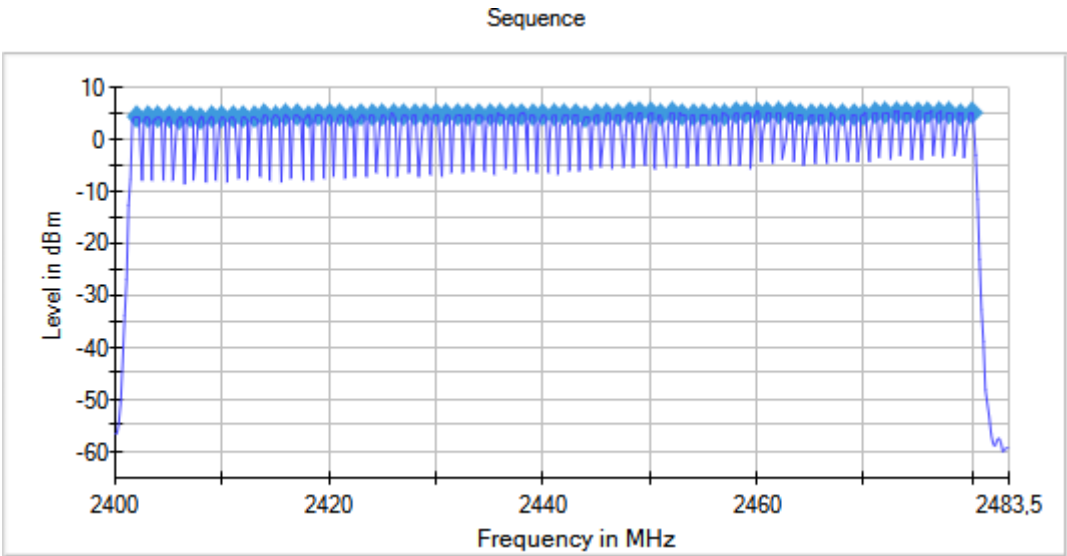

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	54 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.50 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	80



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

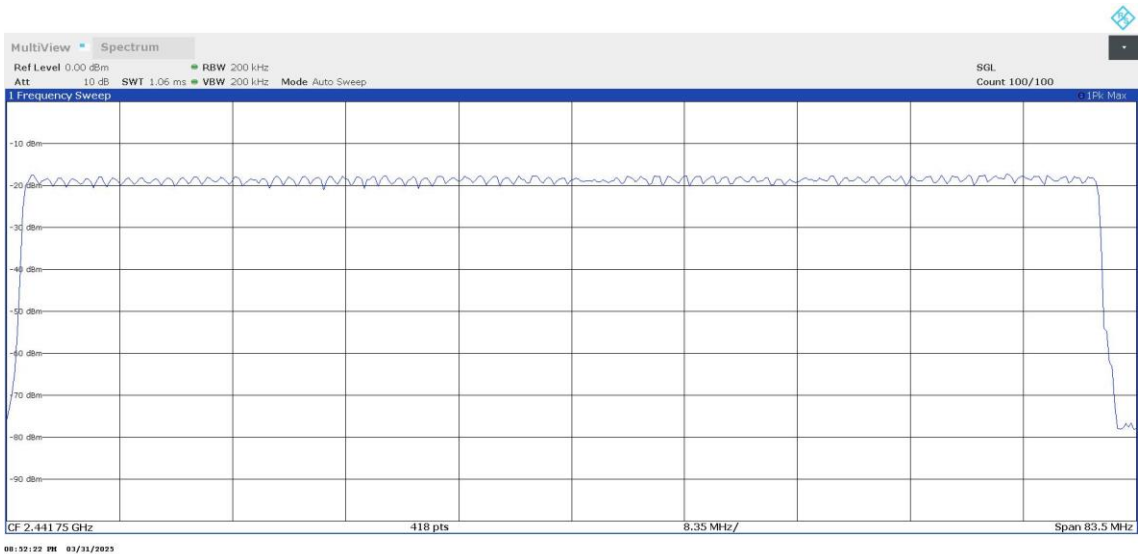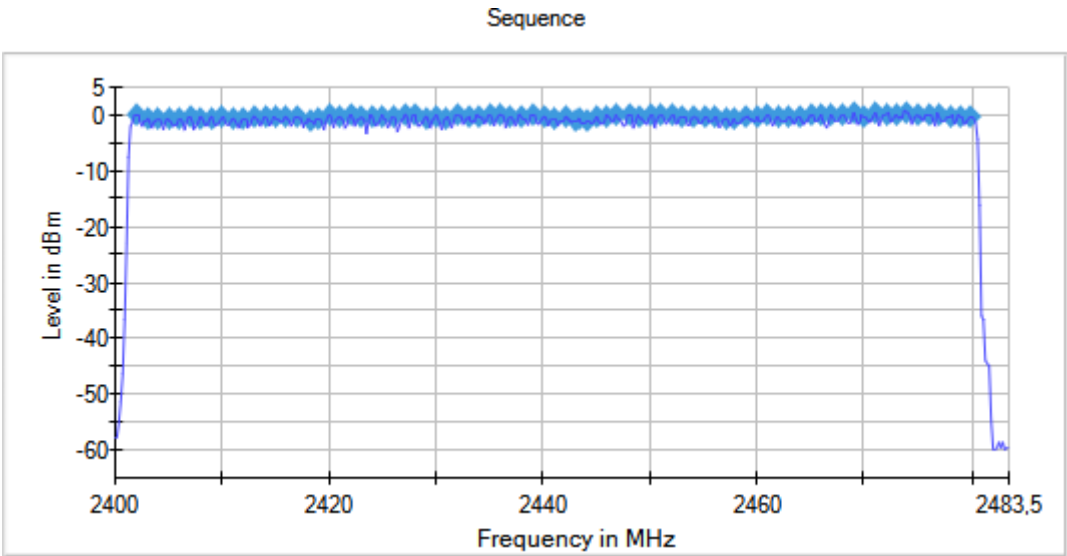

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	83 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.30 dB	0.50 dB

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

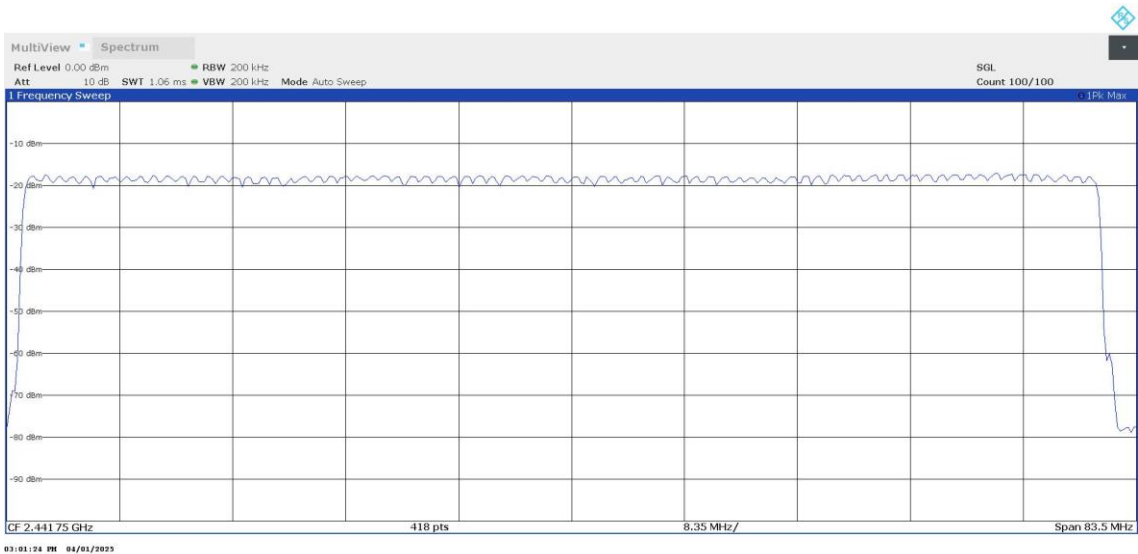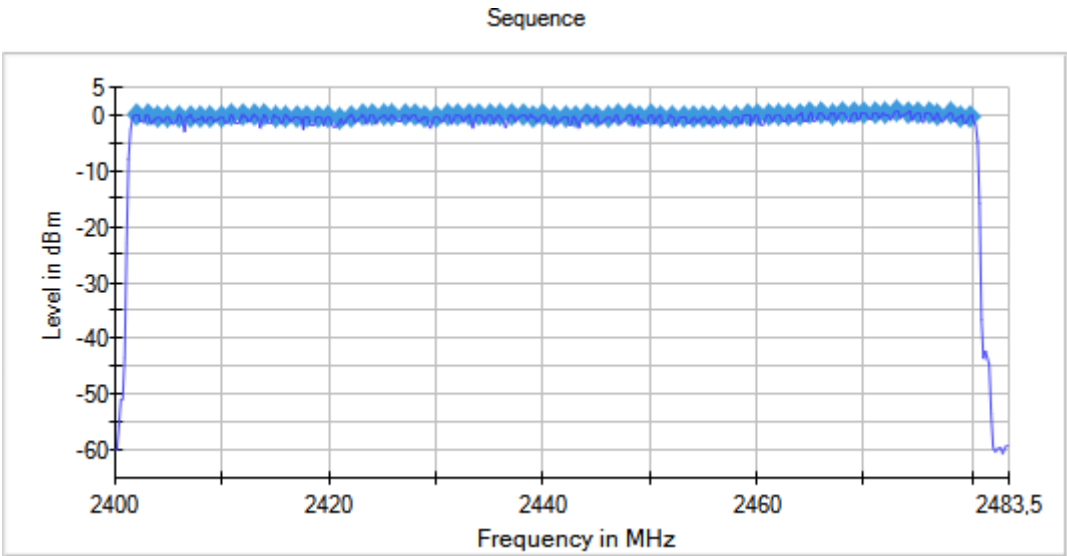

Tables:
Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
SweepTime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	98 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.31 dB	0.50 dB

RSS-247 5.4 / FCC 15.247 (b) [Pkcp] Maximum Peak Conducted Output Power

Limits

FCC 15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 "Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices" of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: -0.18 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Modulation: BT (GFSK 1-DH5)

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	5.0380	4.8580
		2441.00000		5.3250	5.1450
		2480.00000		5.7160	5.5360

Verdict

Pass



Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000 Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

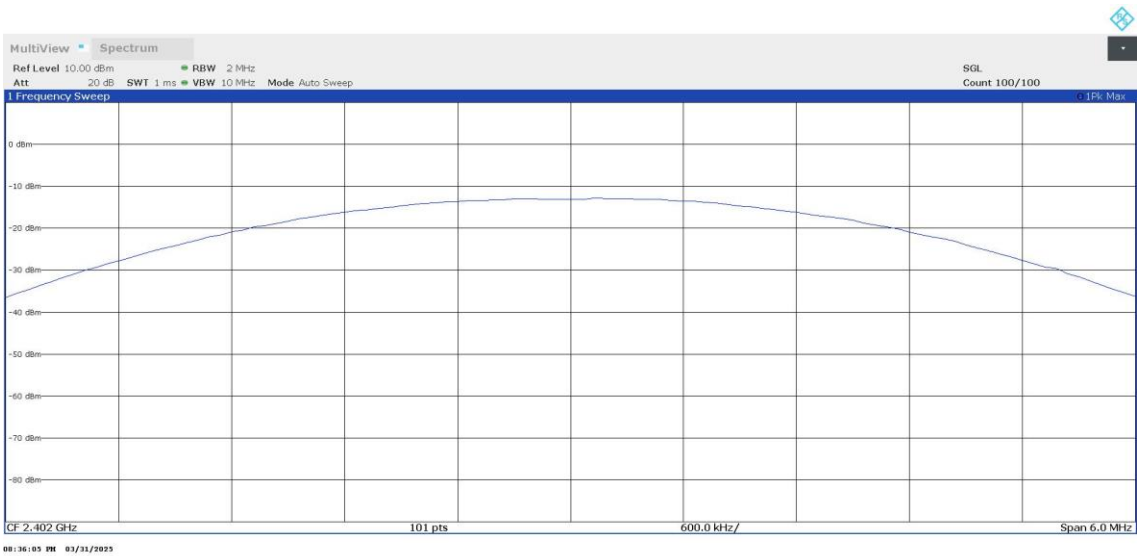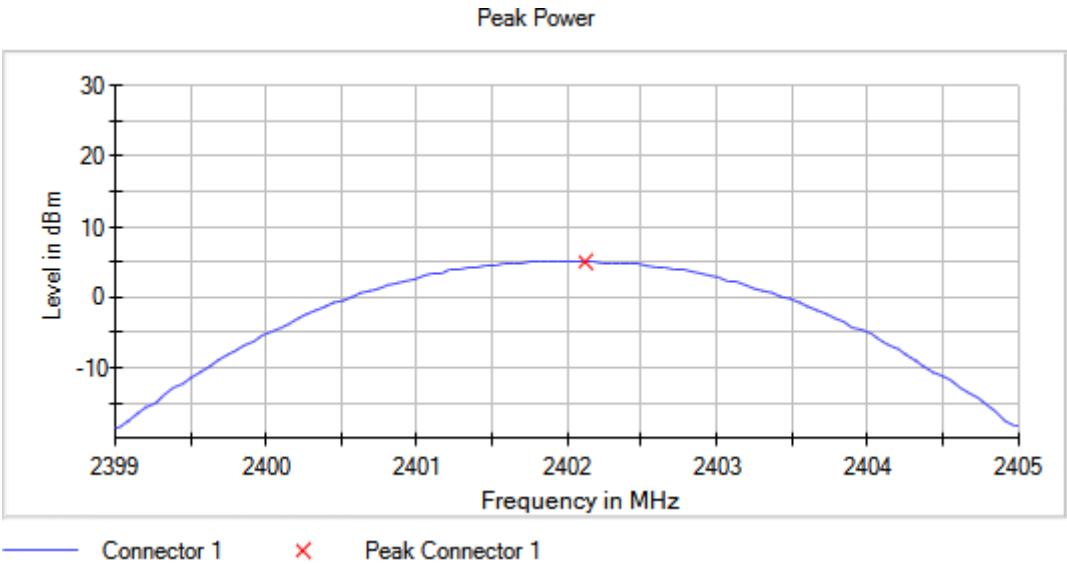

Operation Band MHz = [2400, 2483.5]



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2441.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

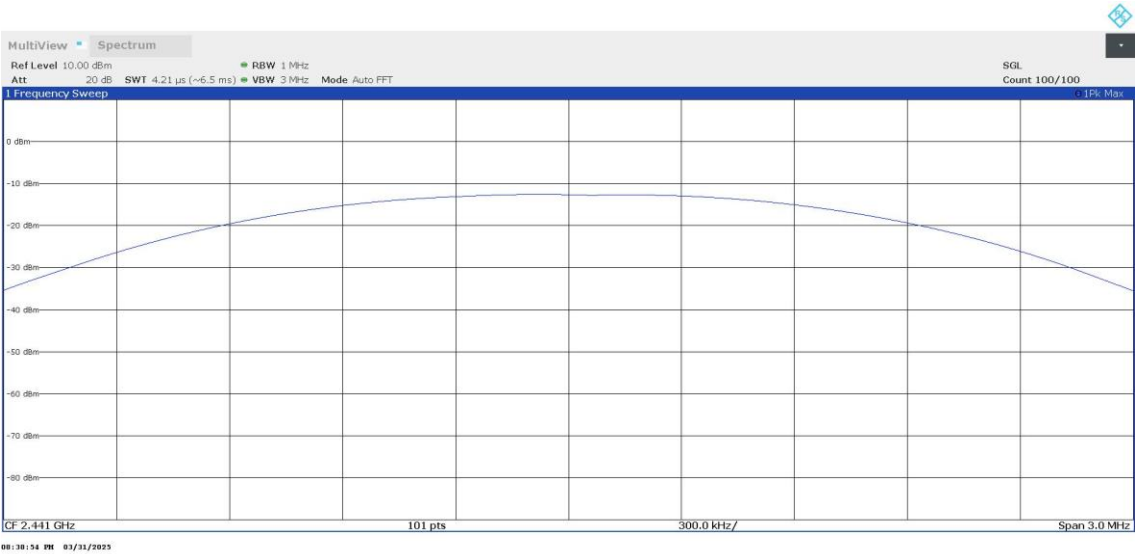
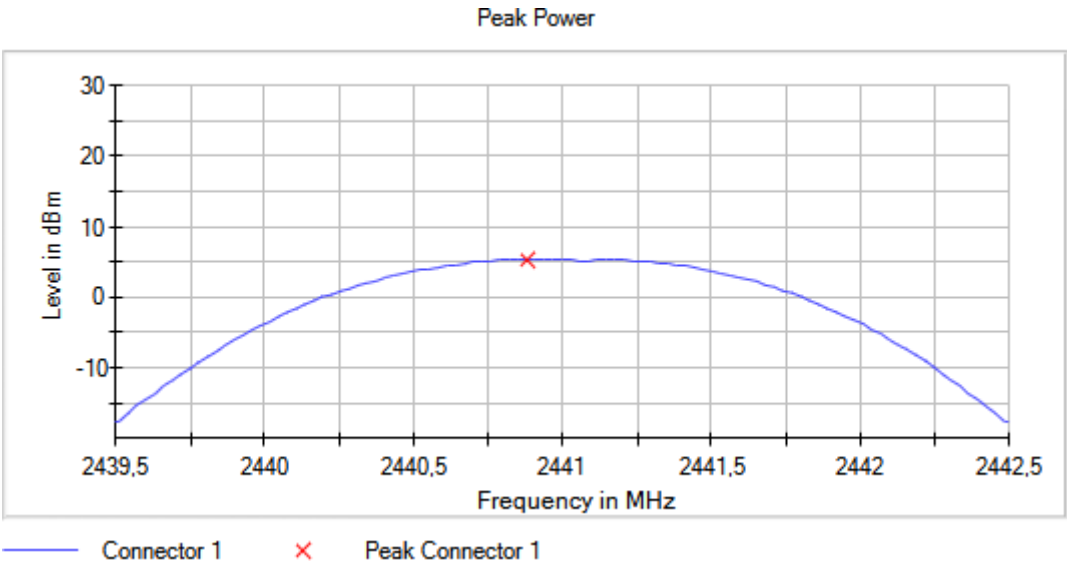


Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000 Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

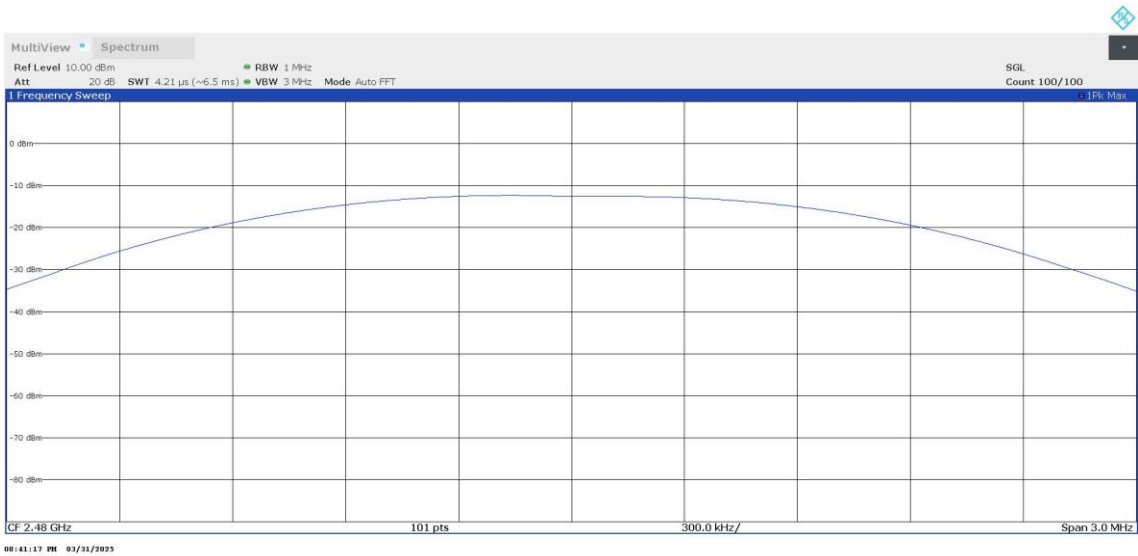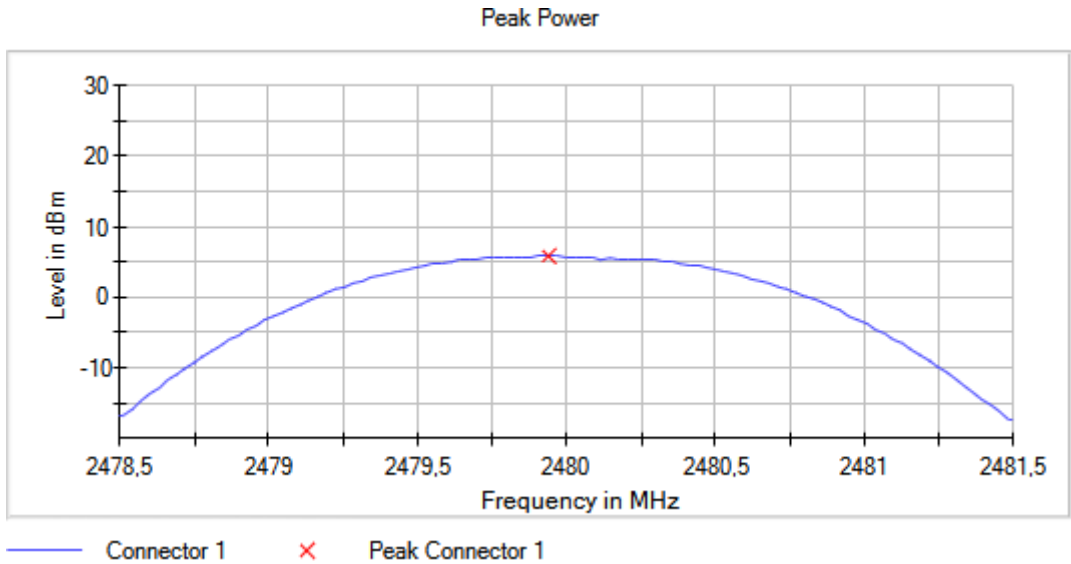

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	2.7040	2,524
		2441.00000		2.6930	2,513
		2480.00000		2.5290	2,349

Verdict

Pass



Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

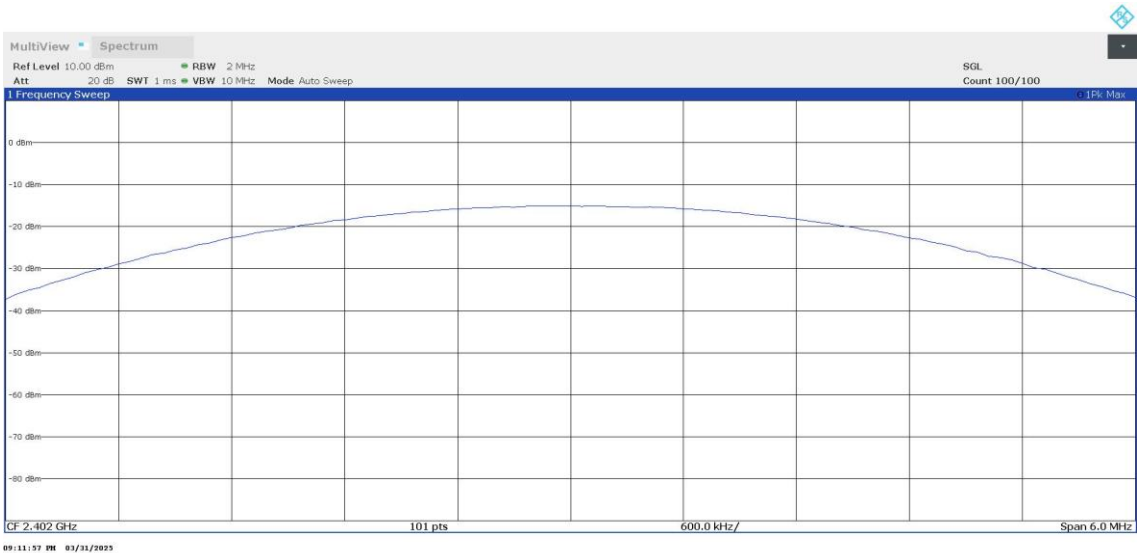
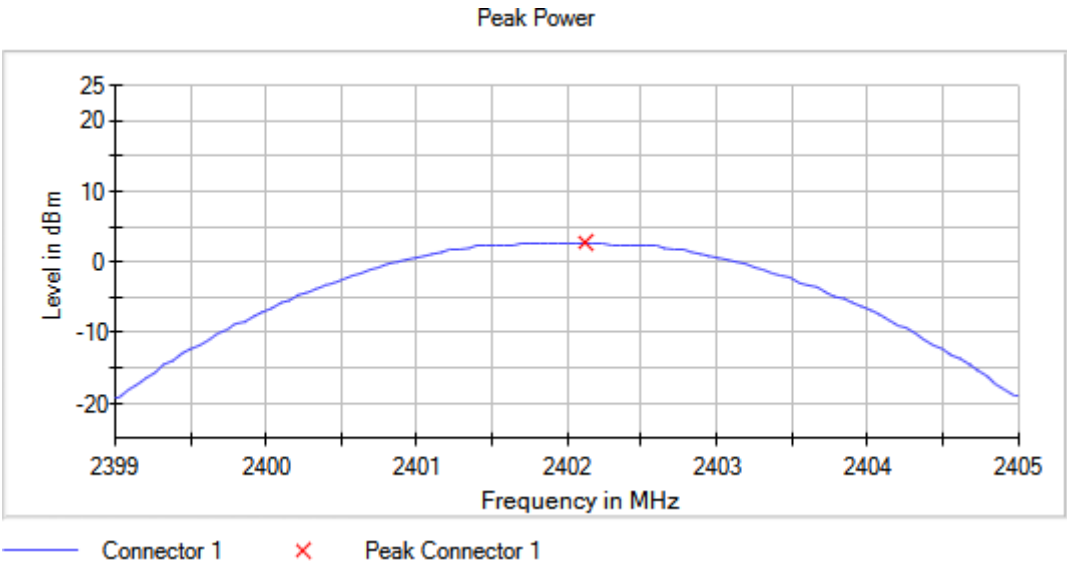


Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2441.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

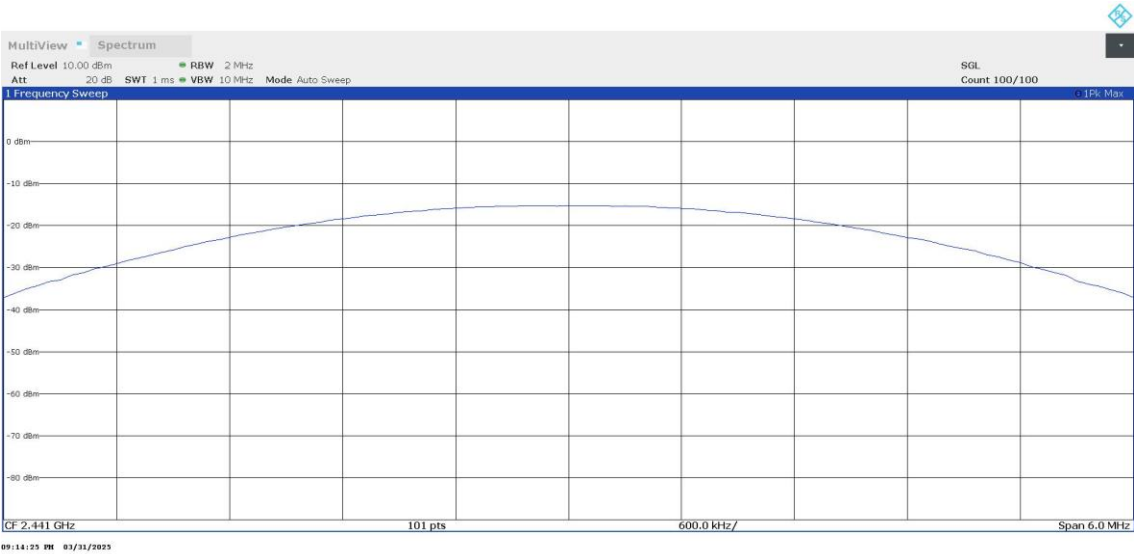
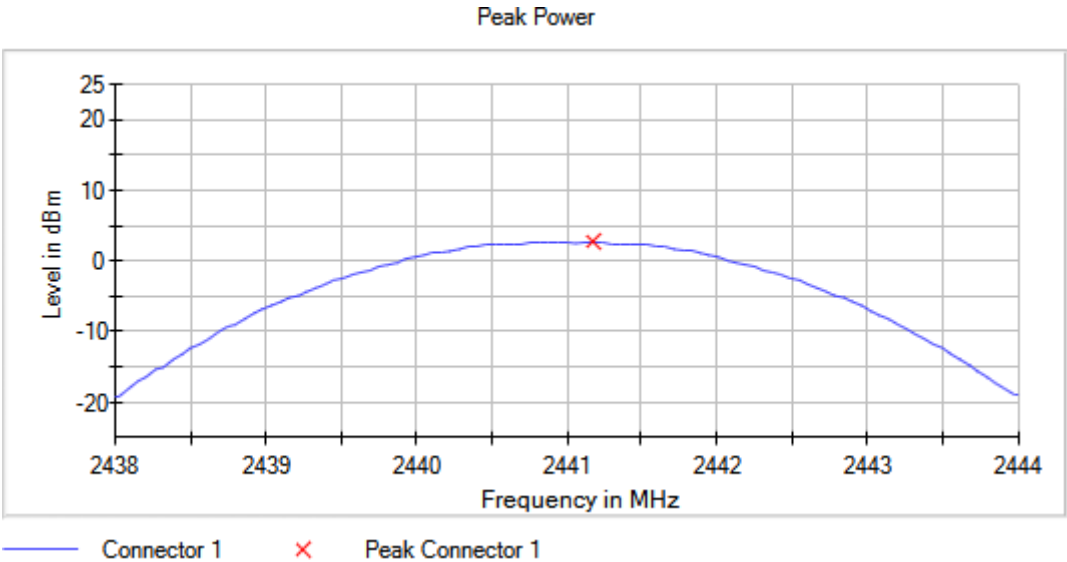


Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

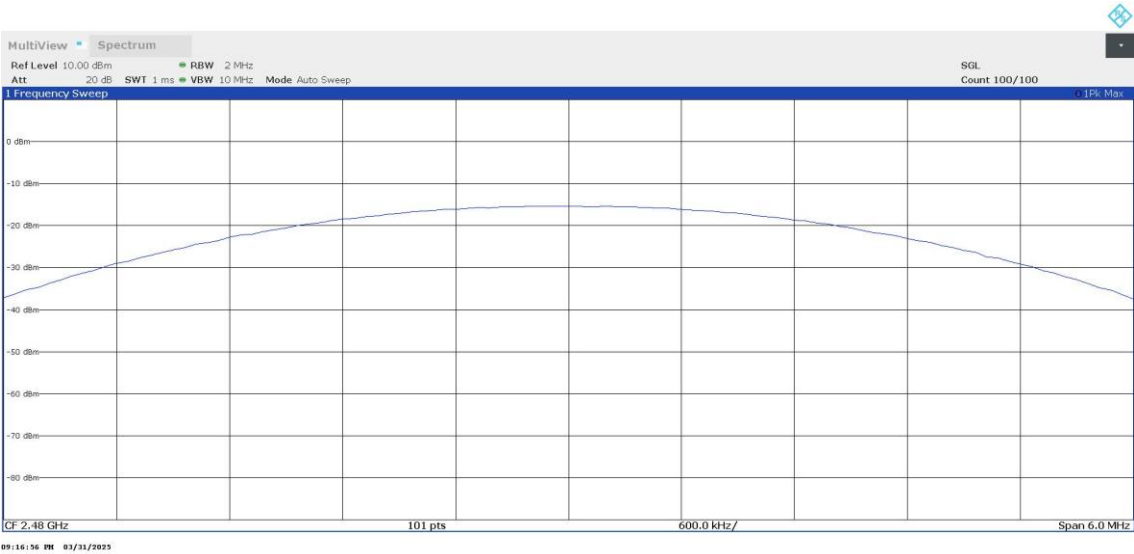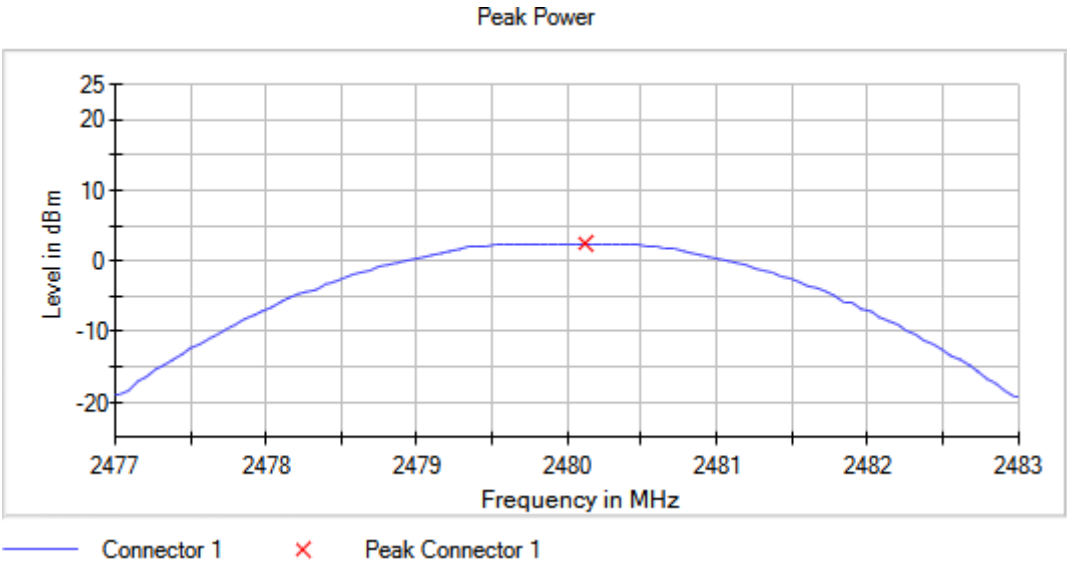

Modulation: BT (8DPSK 3-DH5)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	2402.00000	1	3.2520	3,072
		2441.00000		3.1850	3,005
		2480.00000		3.0940	2,914



Verdict

Pass

Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = BT (8DPSK 3-DH5)

Images:

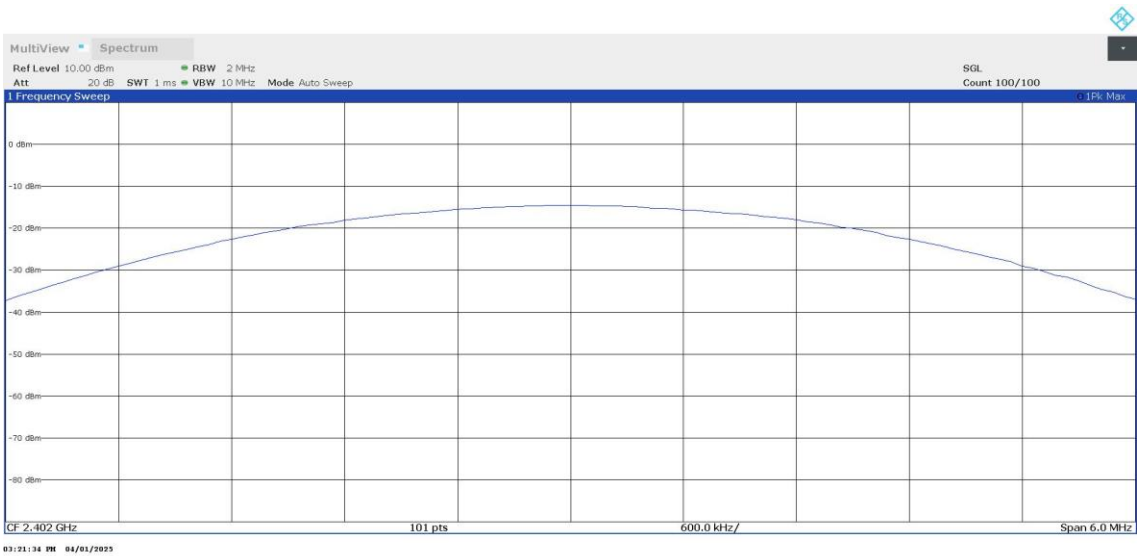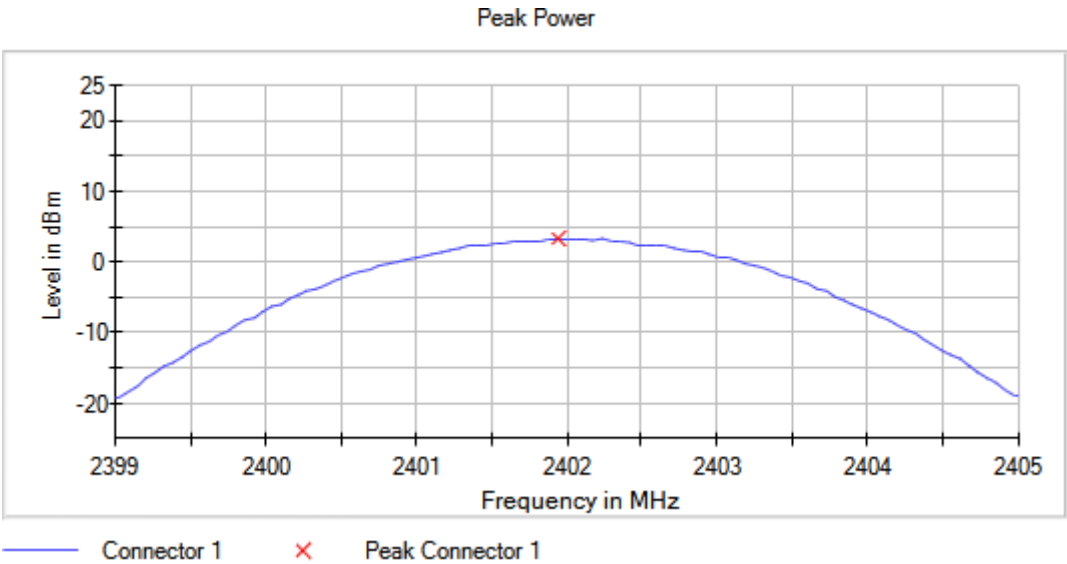

Operation Band MHz = [2400, 2483.5]



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2441.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

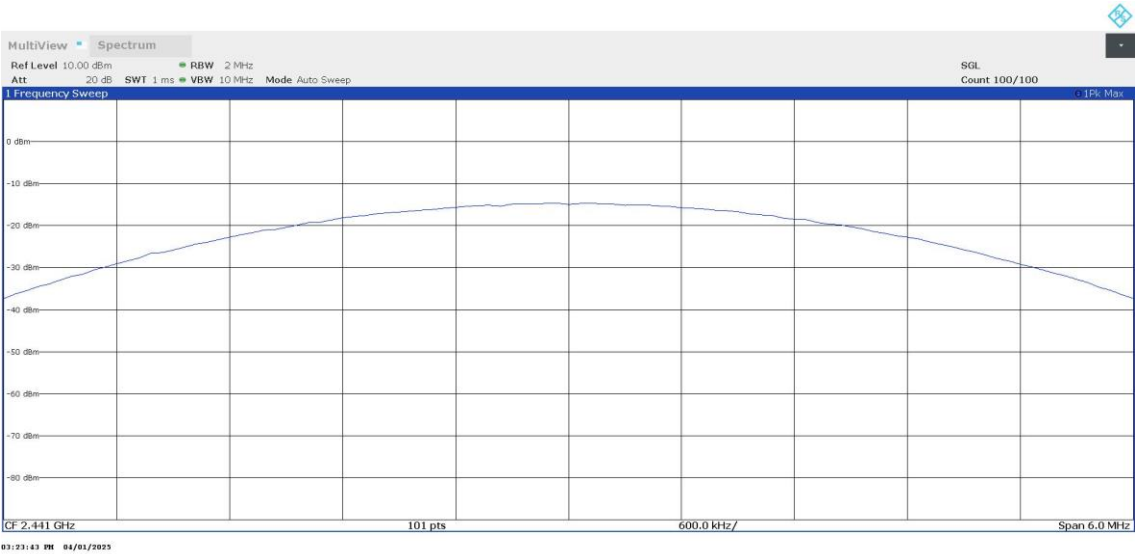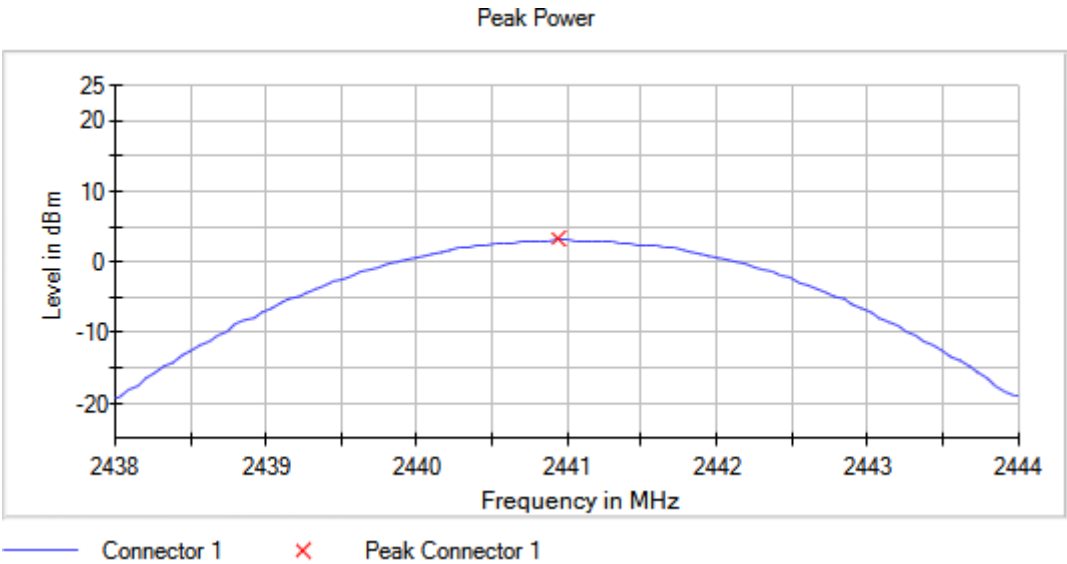

Operation Band MHz = [2400, 2483.5]



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

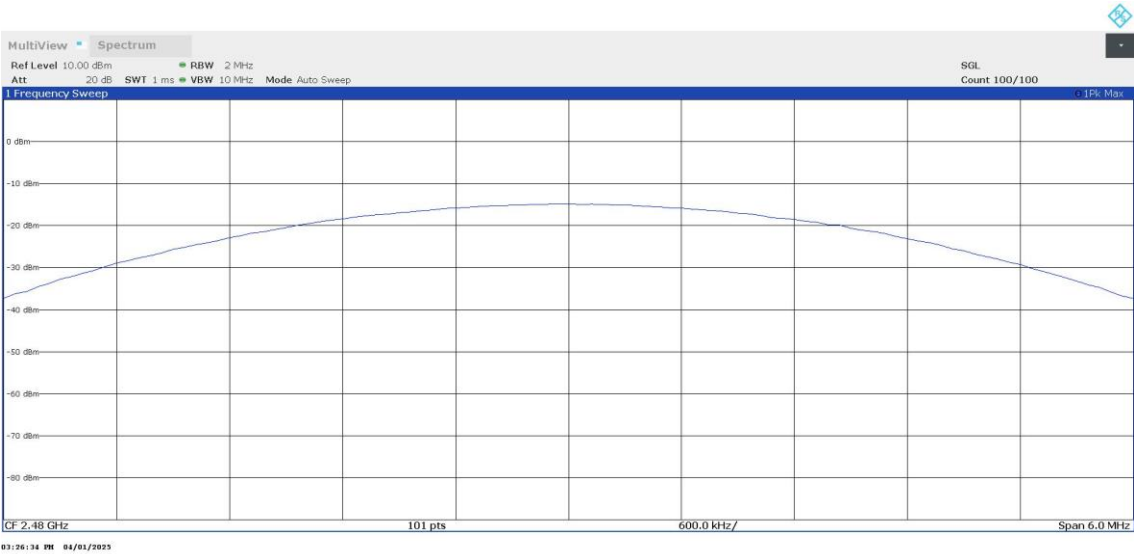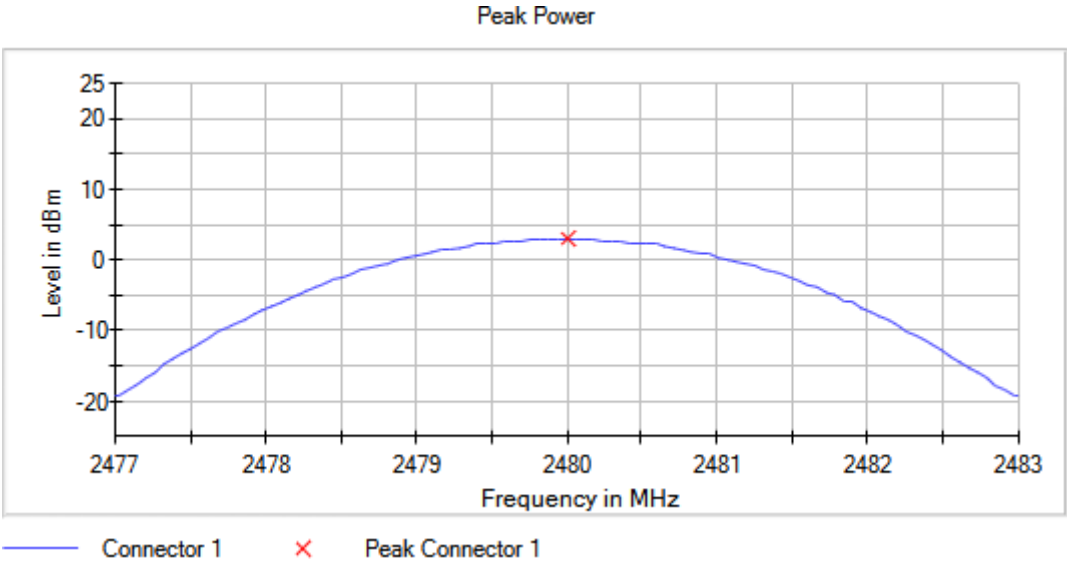

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: BT (GFSK 1-DH5)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz

Verdict

Pass

Attachments

Operation Band MHz = [2400,
2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 0.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

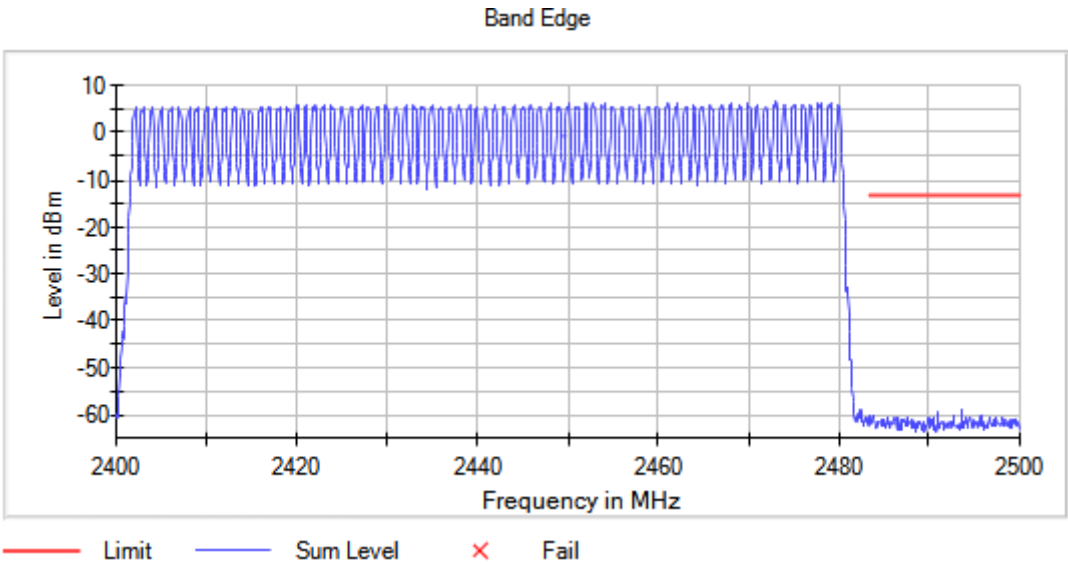

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	93 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 0.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

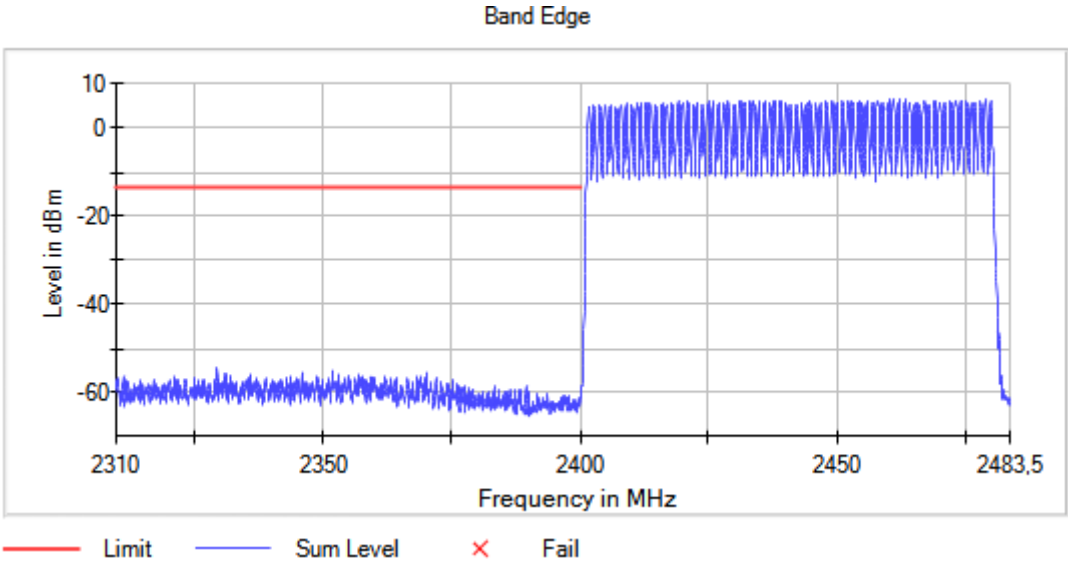

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	93 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

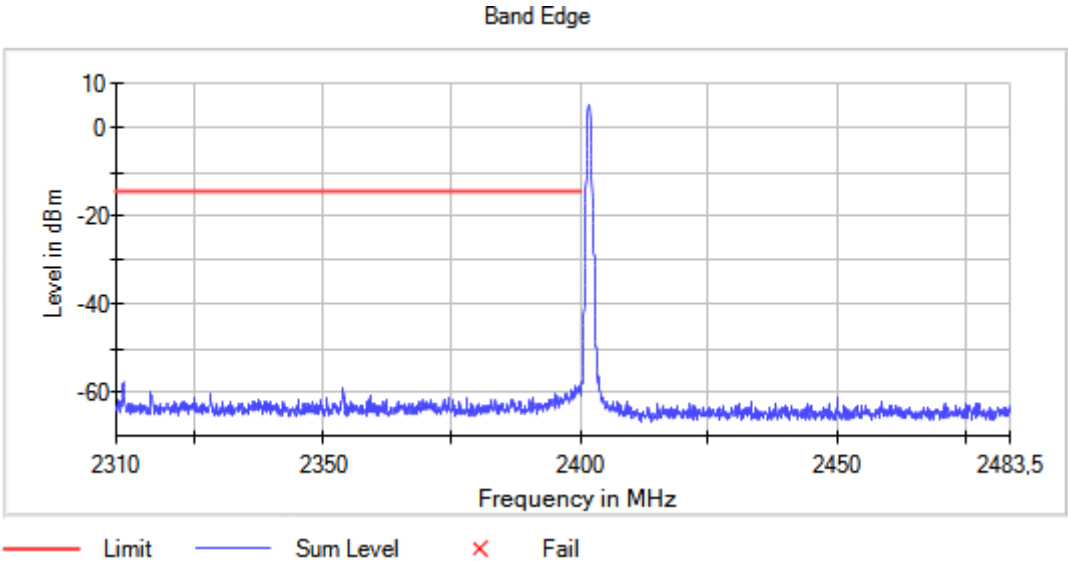

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	93 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Operation Band MHz = [2400,
2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

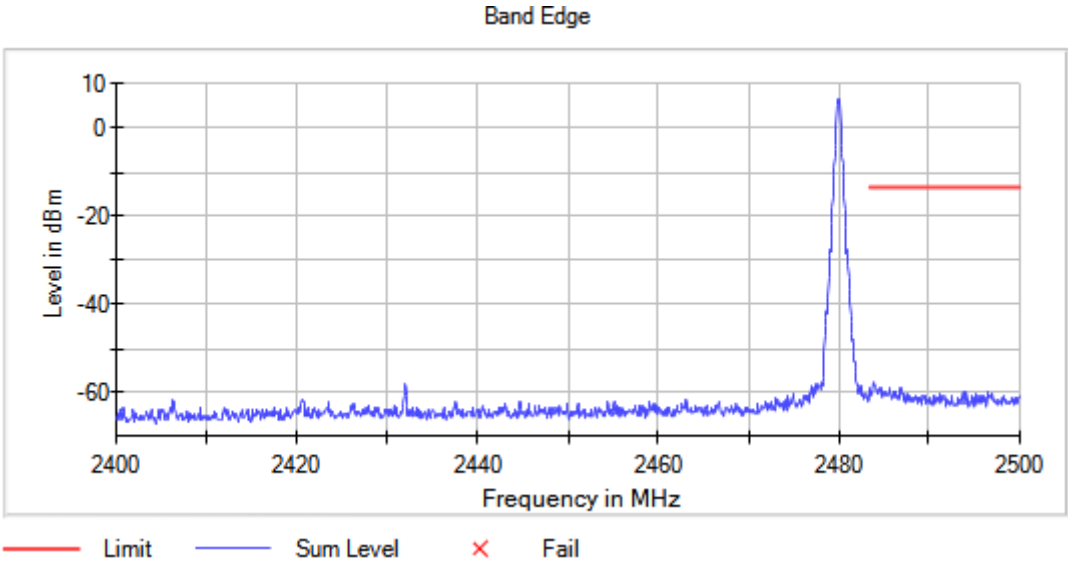

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	93 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Verdict

Pass

AttachmentsOperation Band MHz = [2400, 2483.5]


Frequency MHz = 0.00000

Modulation = BT (Pi/4 DQPSK 2-DH5)

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Active Port = 1

Images:

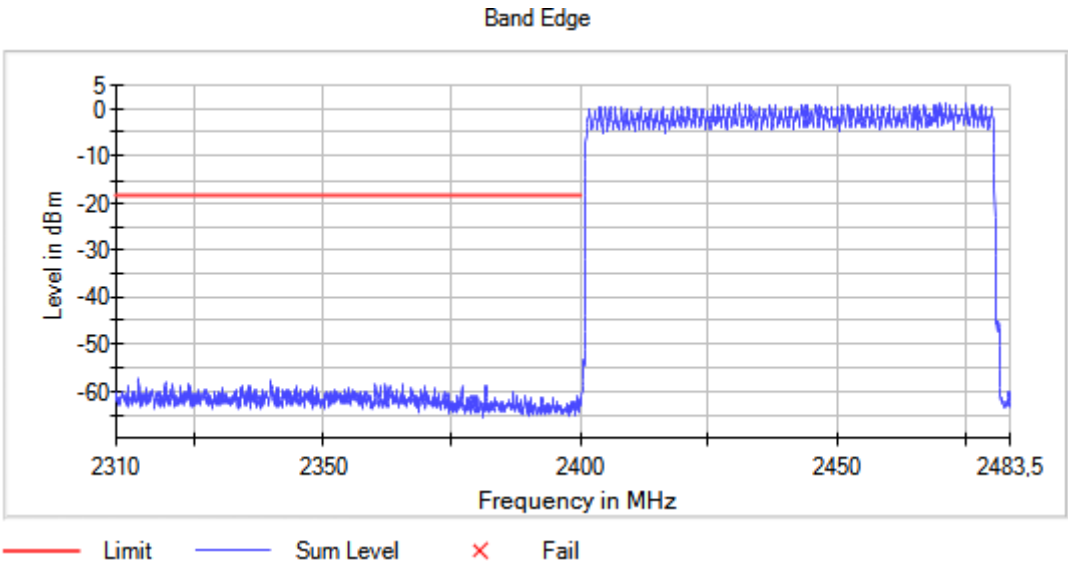

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	143 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 0.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

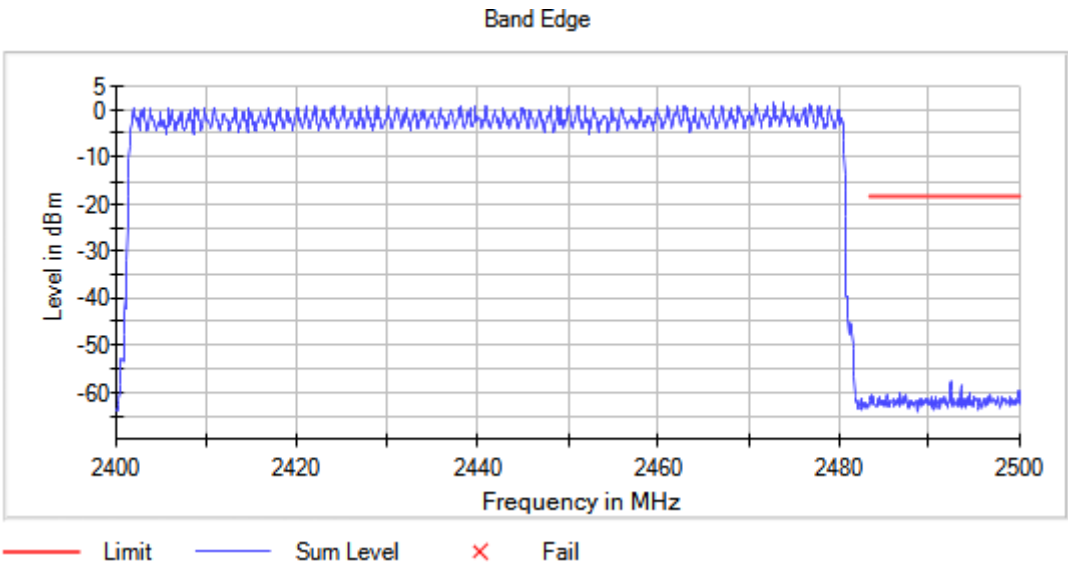

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	143 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

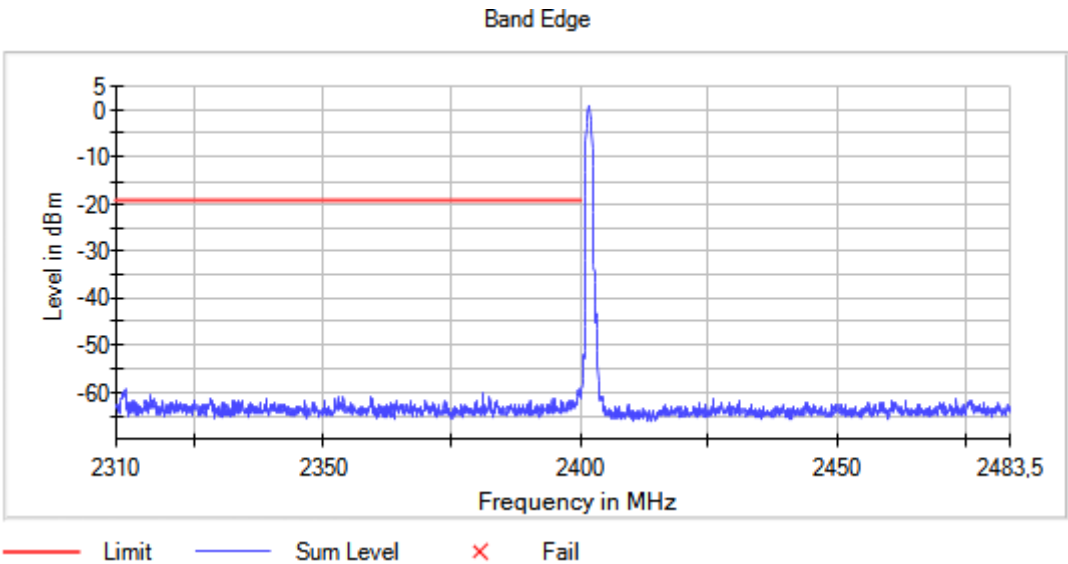

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2


Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	143 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400, 2483.5] Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000 Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

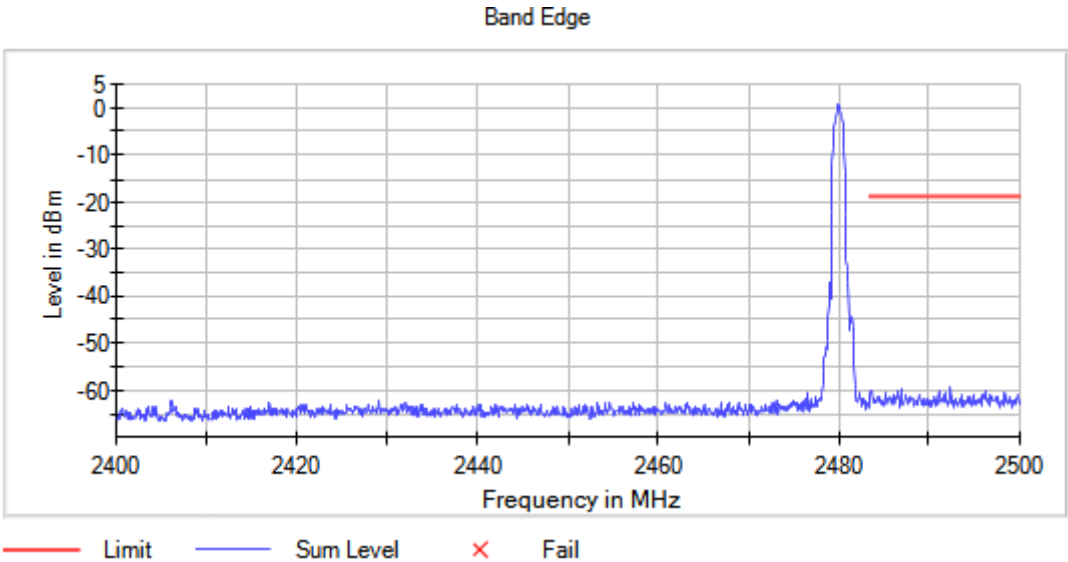

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	143 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (8DPSK 3-DH5)

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Verdict

Pass

Attachments

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 0.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

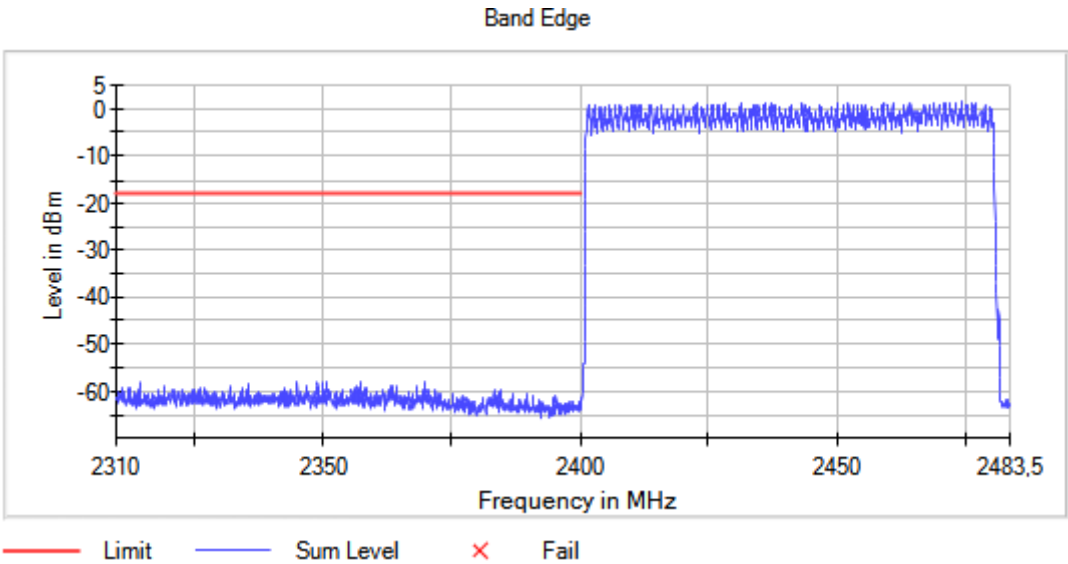

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400,
2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 0.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

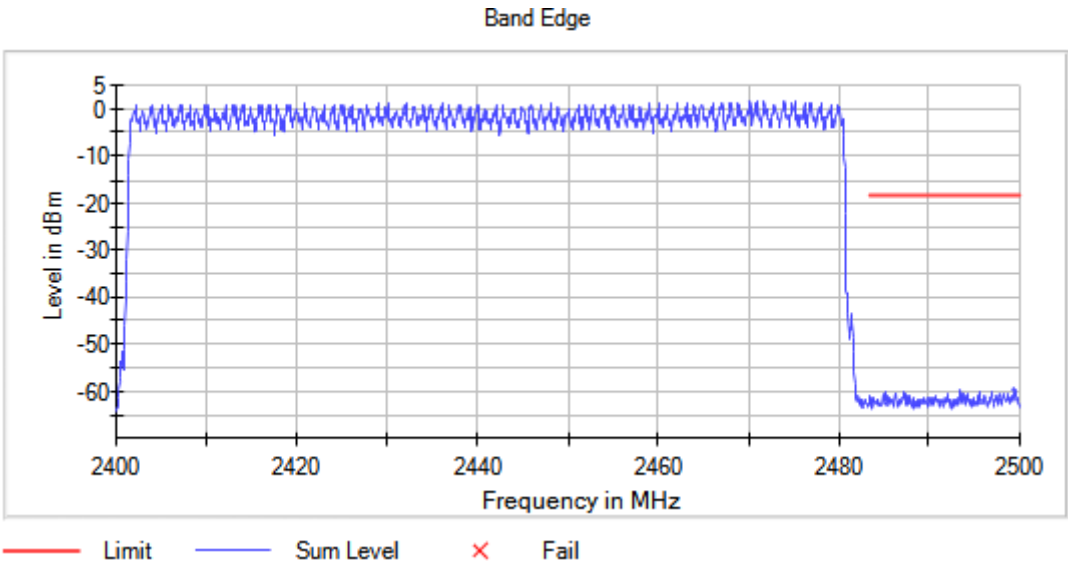

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

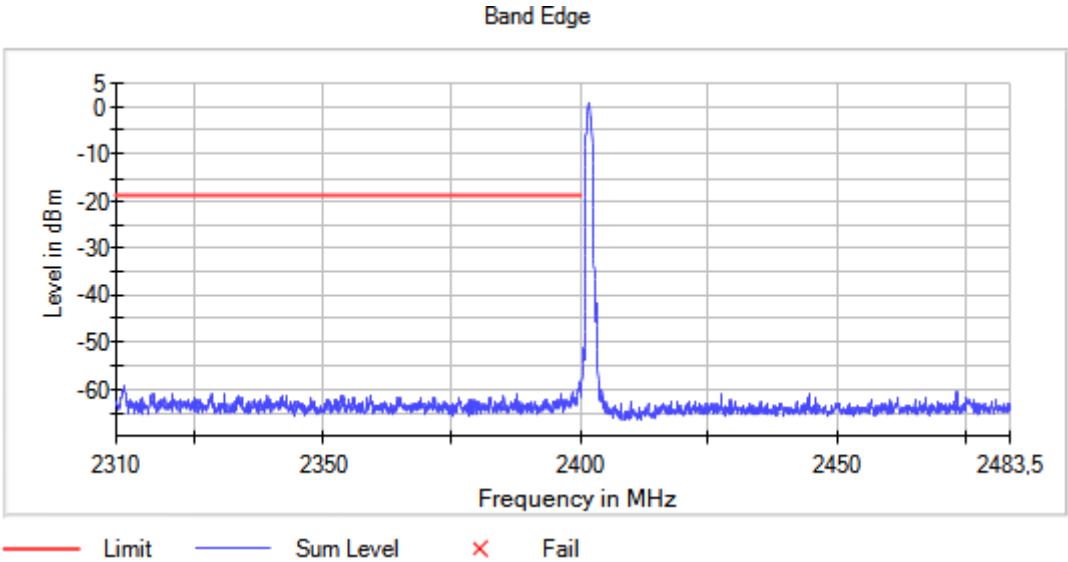

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweptime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400,
2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

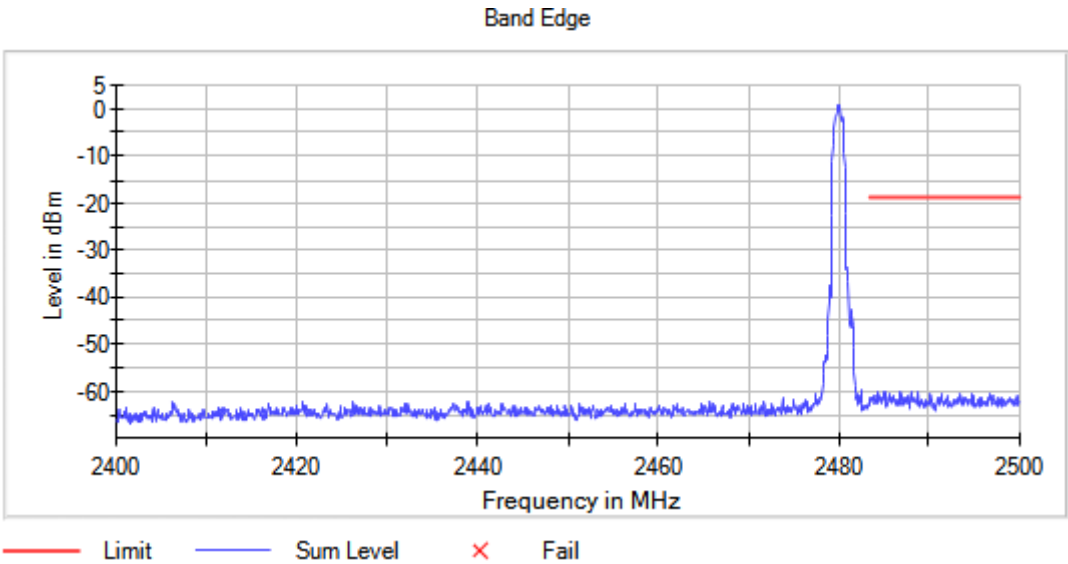

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	1.800 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	121 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-harmonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th harmonic.

Modulation: BT (GFSK 1-DH5)

Results

Frequency range: 30MHz – 1GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Frequency range: 1GHz – 3GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 3GHz – 17GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 17GHz – 26GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Active Port = 1

Operation Band MHz = [2400, 2483.5]

Frequency MHz = 2402.00000

Modulation = BT (GFSK 1-DH5)

Images:

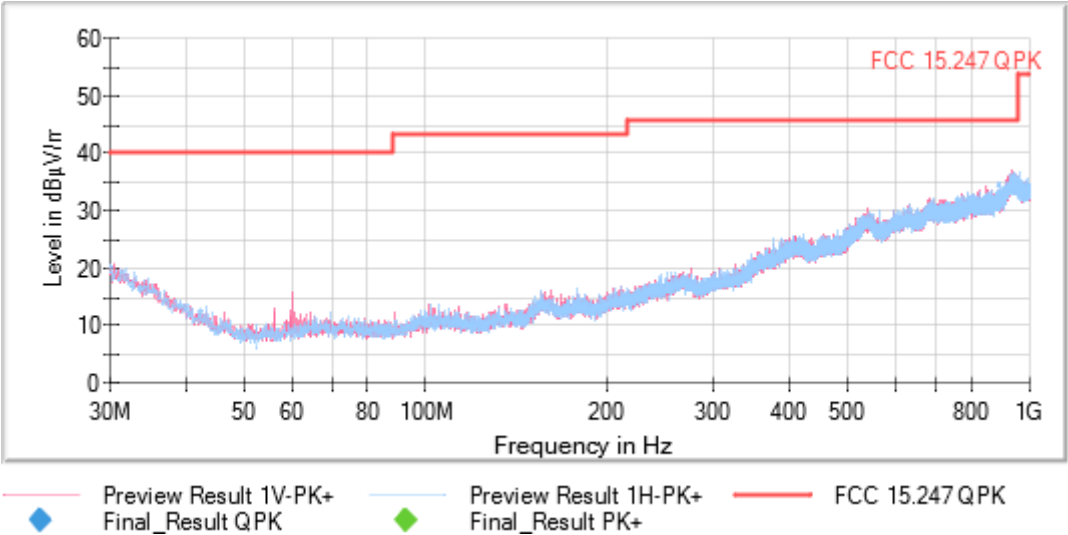

This plot is valid for all channels

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000


Active Port = 2


Modulation = BT (GFSK 1-DH5)

Images:

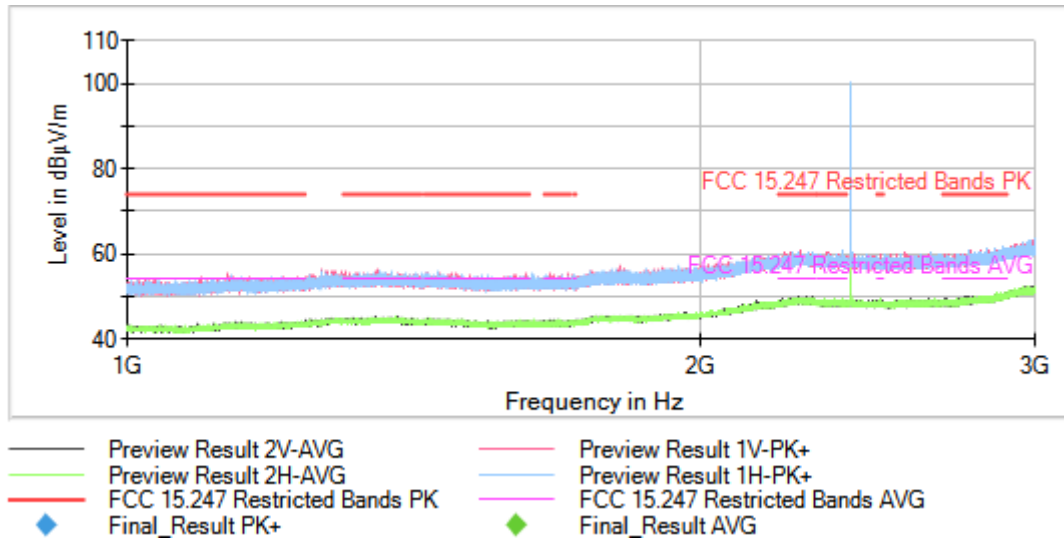

Full Spectrum

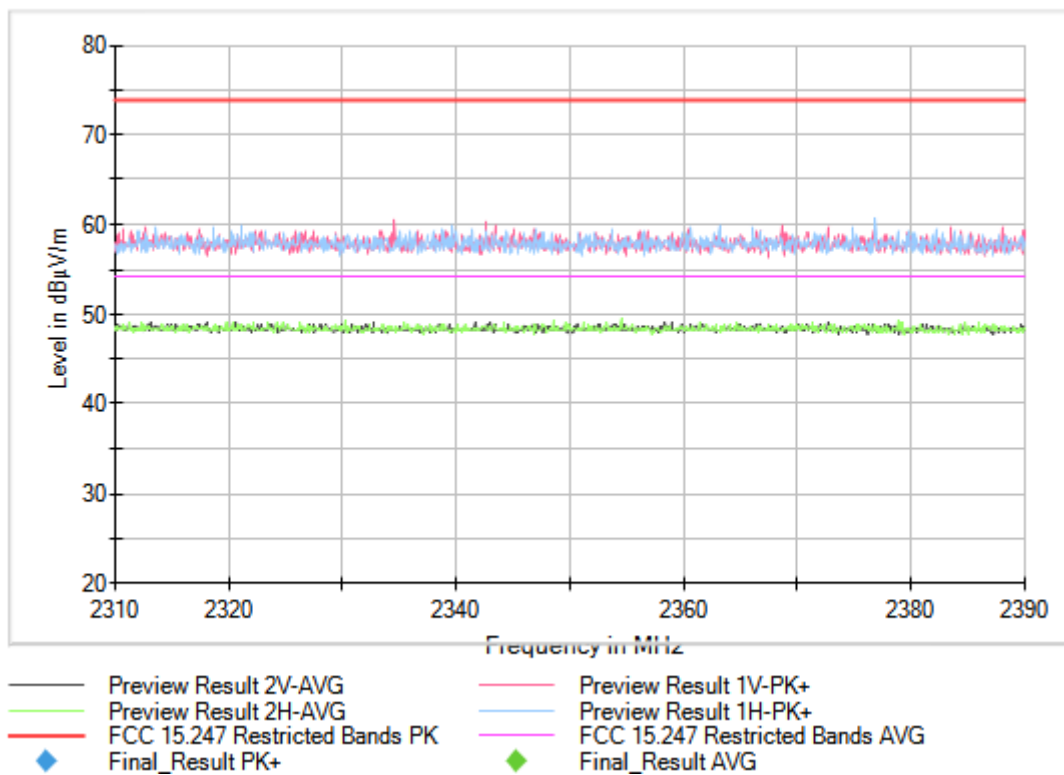

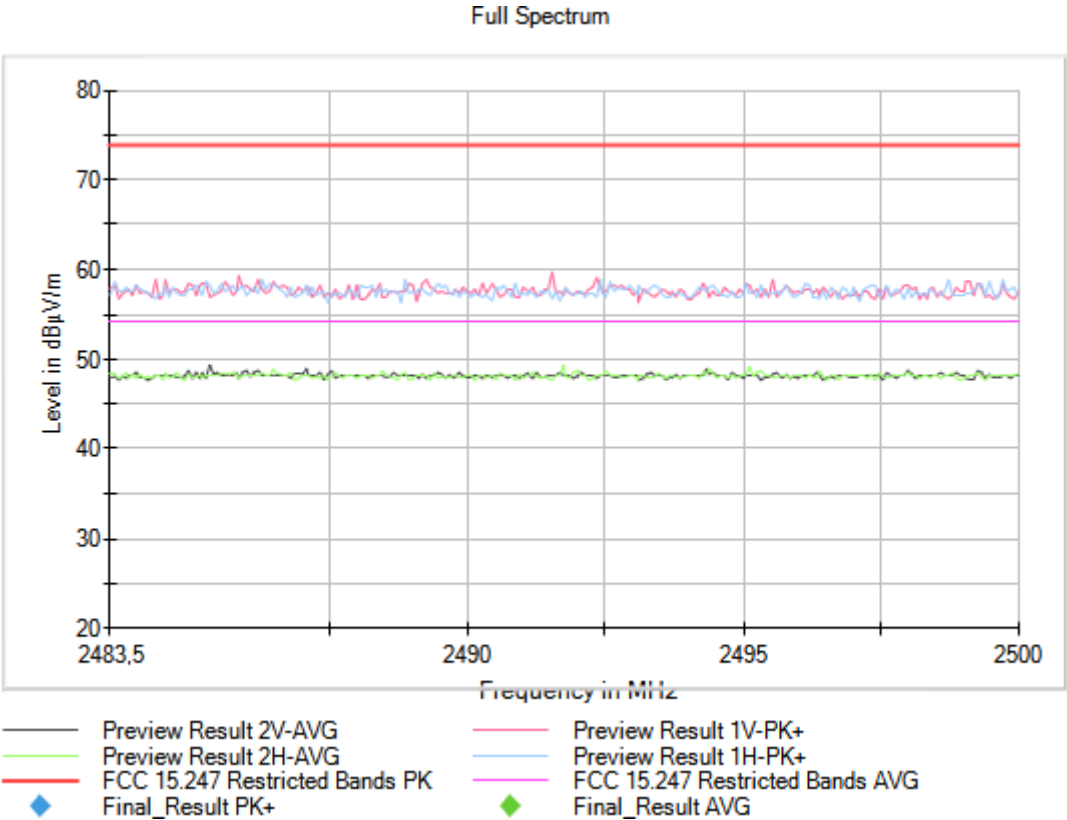

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2441.00000


Active Port = 2


Modulation = BT (GFSK 1-DH5)

Images:

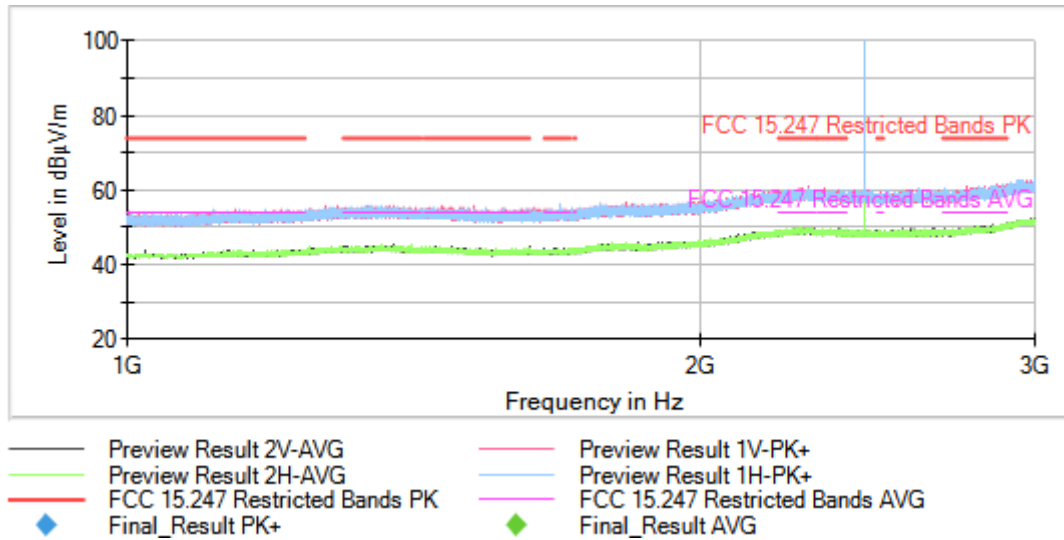

Full Spectrum

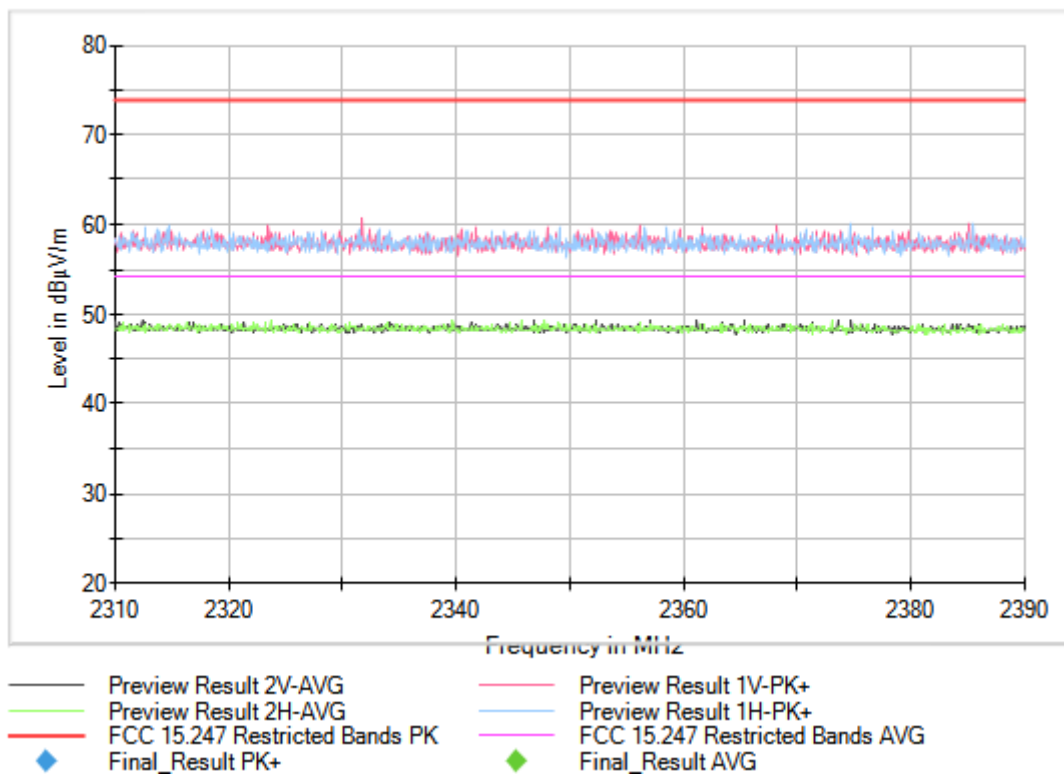

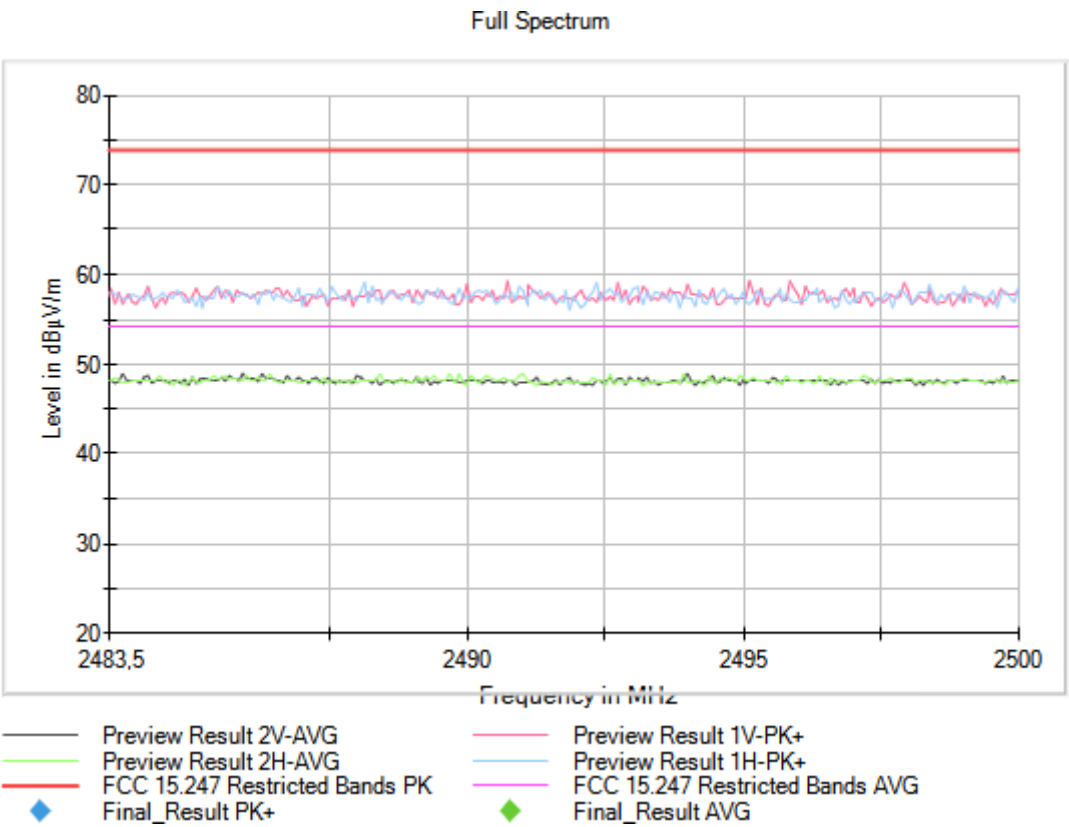

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000


Active Port = 2


Modulation = BT (GFSK 1-DH5)

Images:

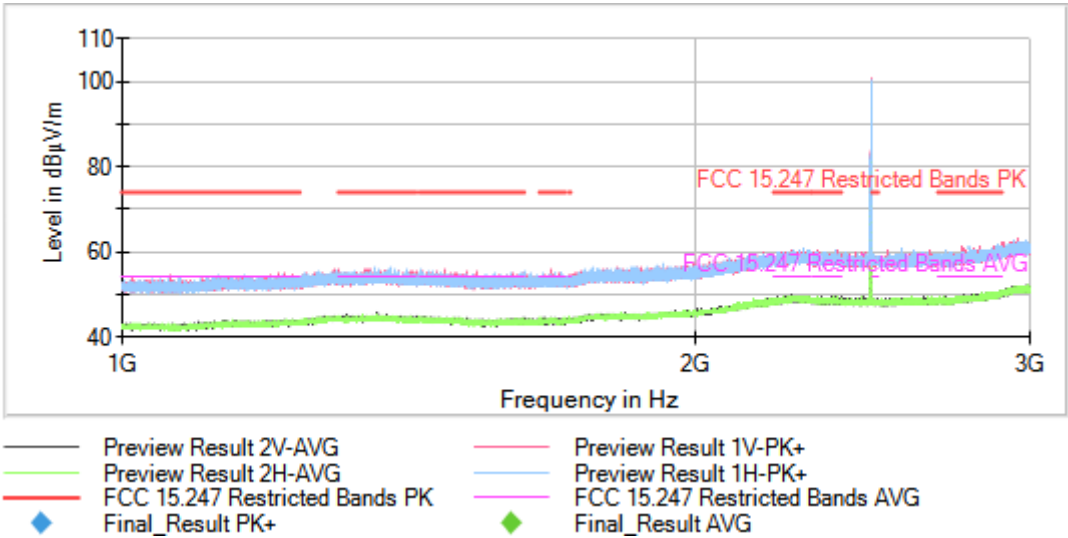

Full Spectrum

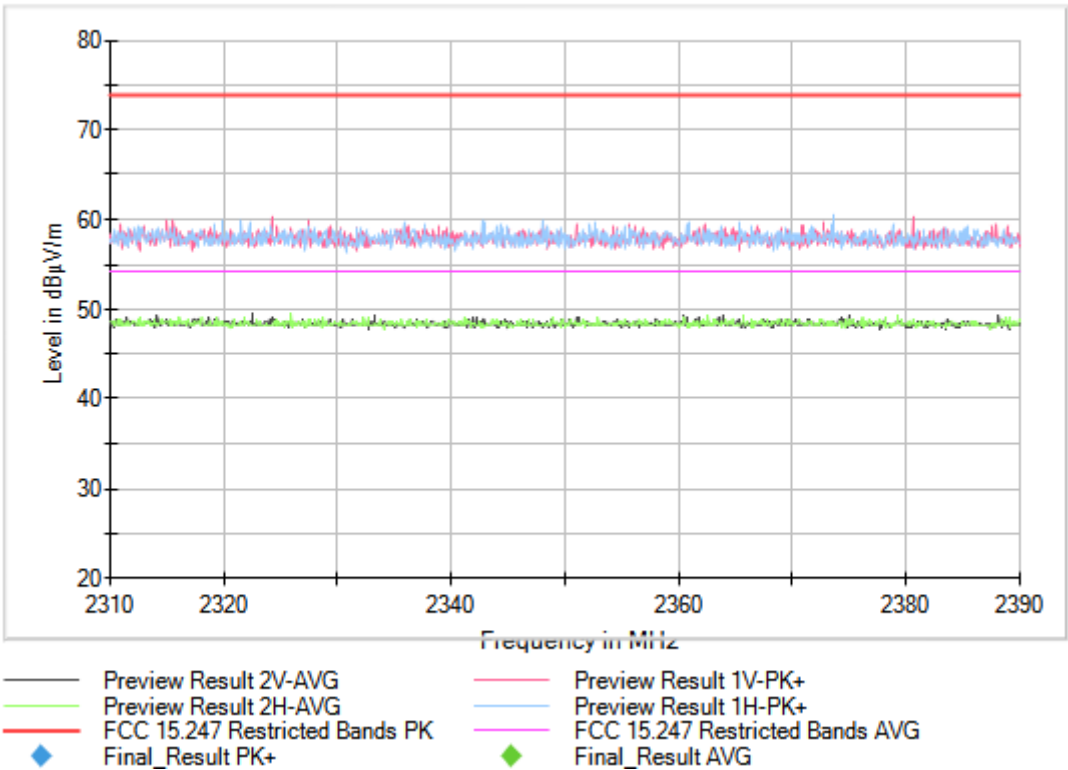

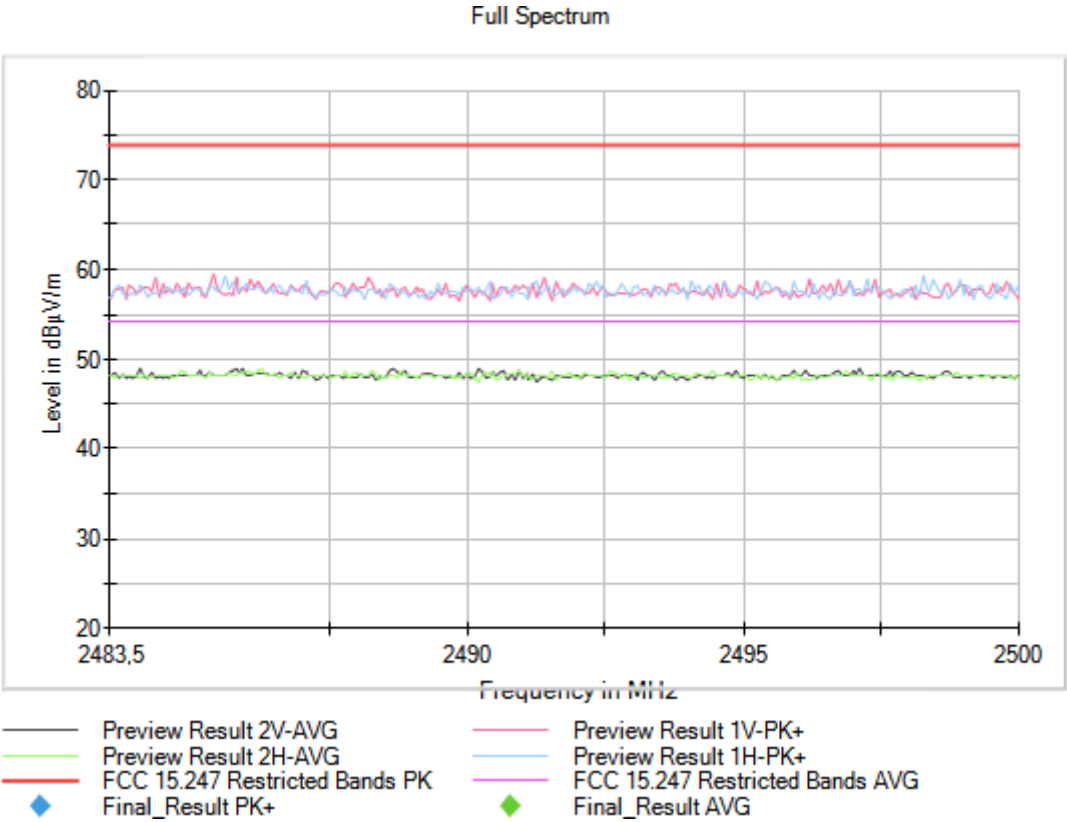

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

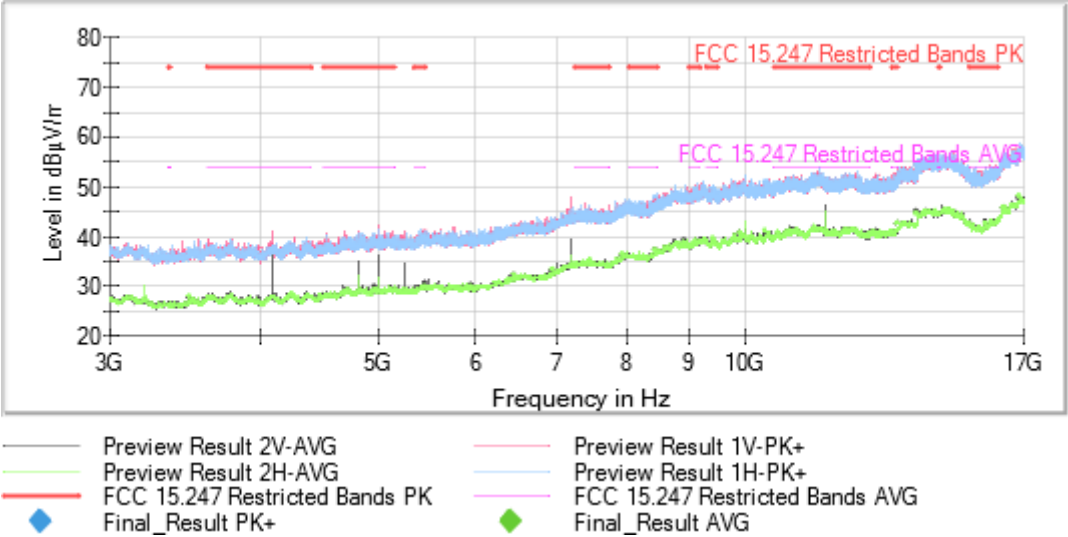

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2440.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

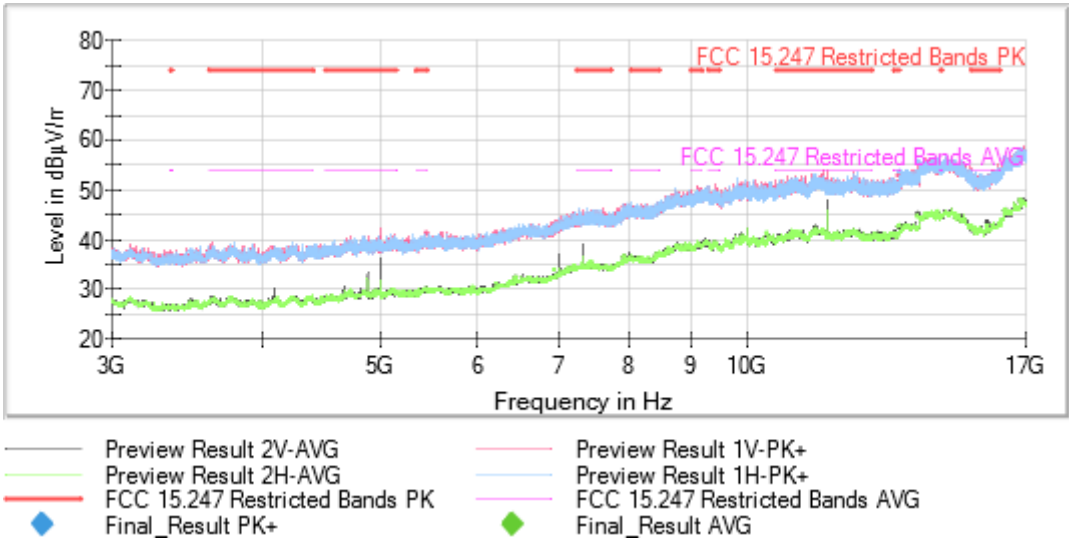

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

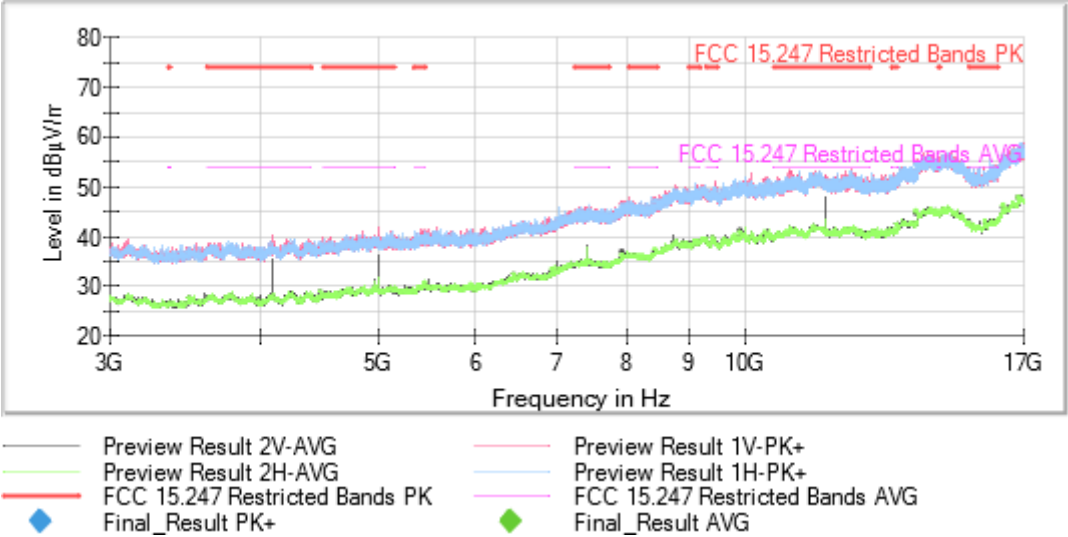

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (GFSK 1-DH5)

Images:

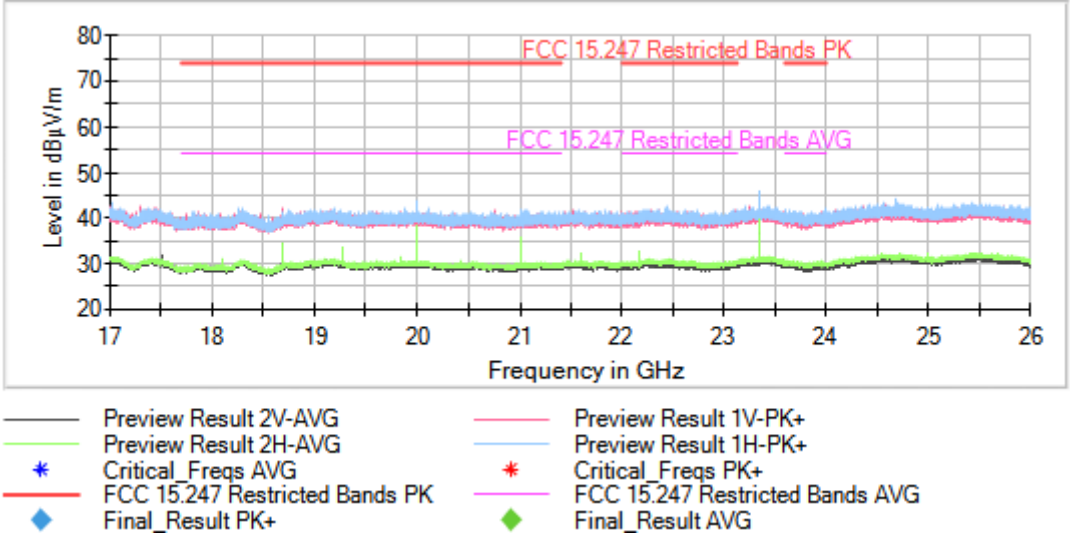

This plot is valid for all channels

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Frequency range: 30MHz – 1GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Frequency range: 1GHz – 3GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 3GHz – 17GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 17GHz – 26GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Active Port = 1

Operation Band MHz = [2400, 2483.5]

Frequency MHz = 2402.00000

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

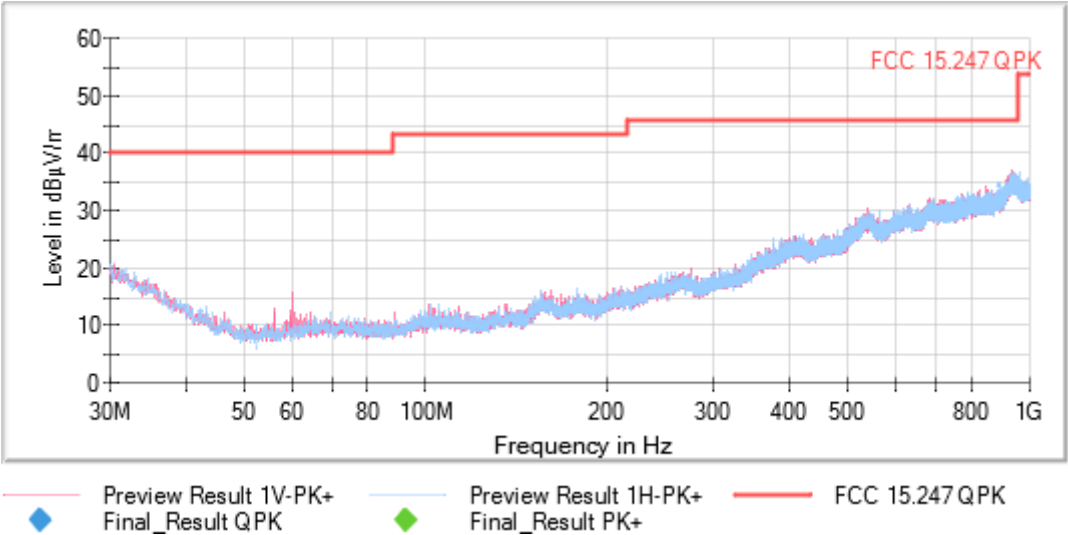

This plot is valid for all channels

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2402.00000


Active Port = 2


Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

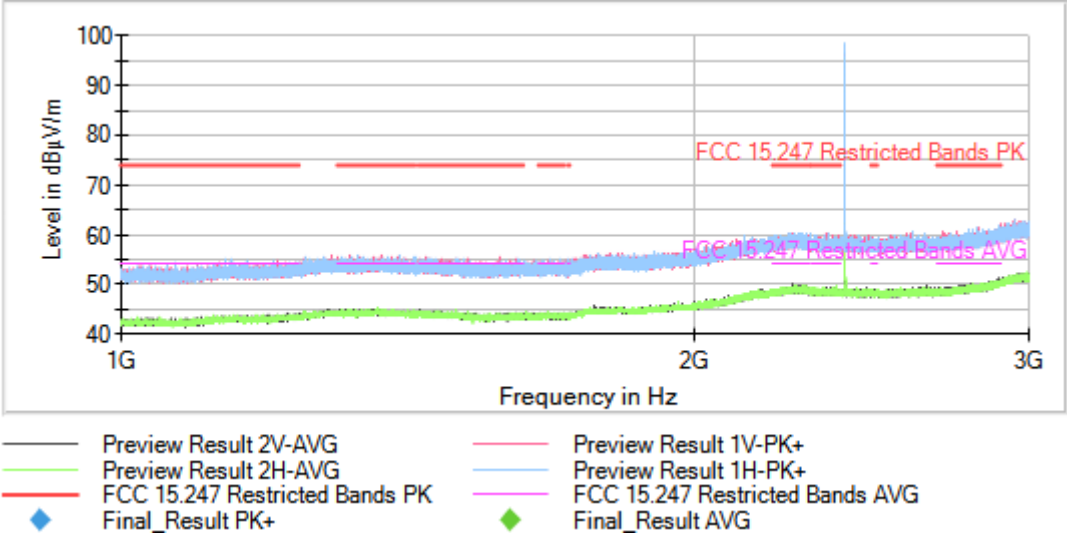

Full Spectrum

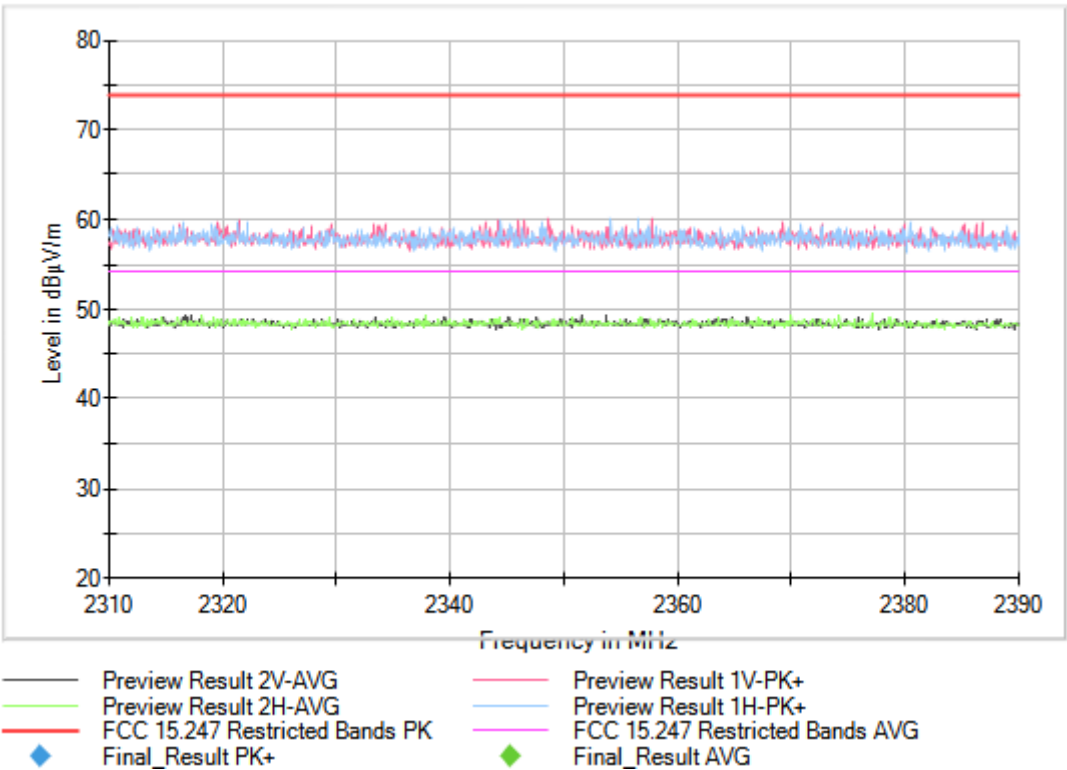

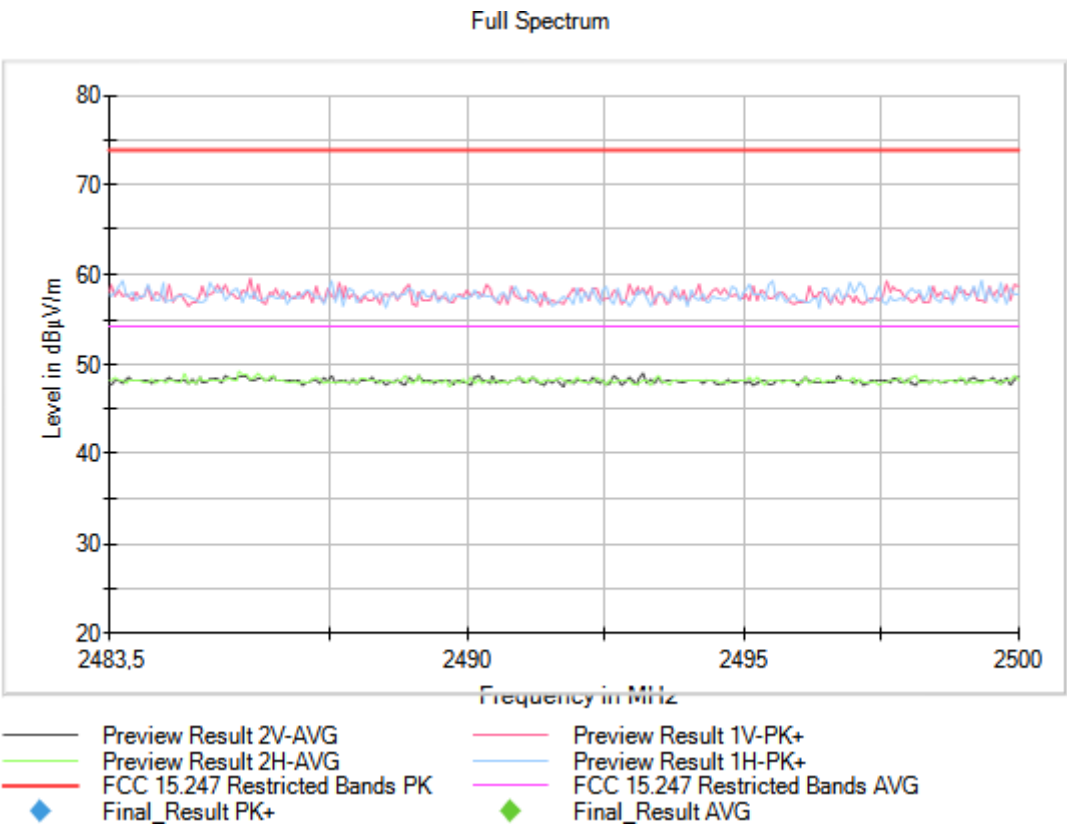

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2441.00000


Active Port = 2

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

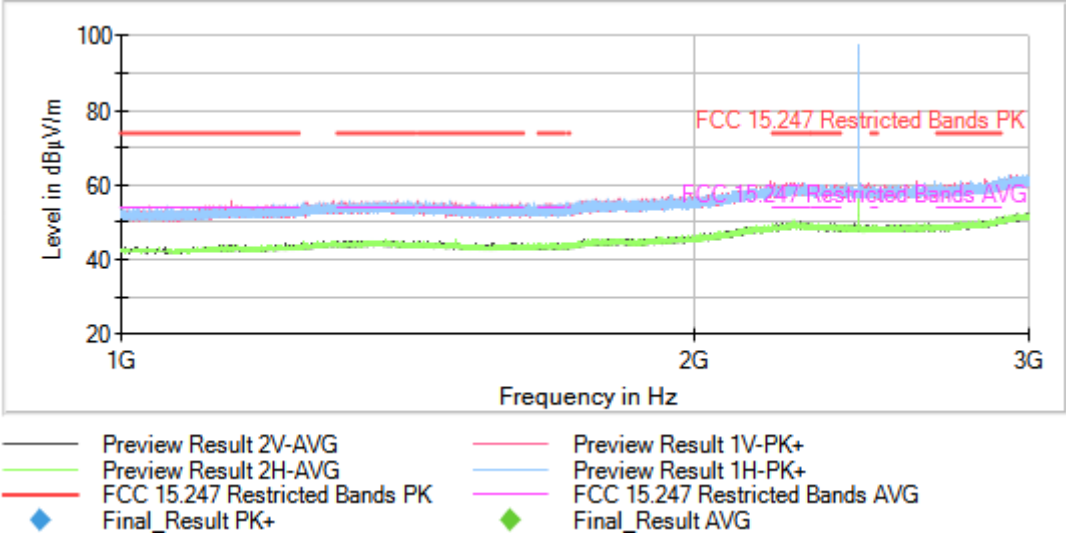

Full Spectrum

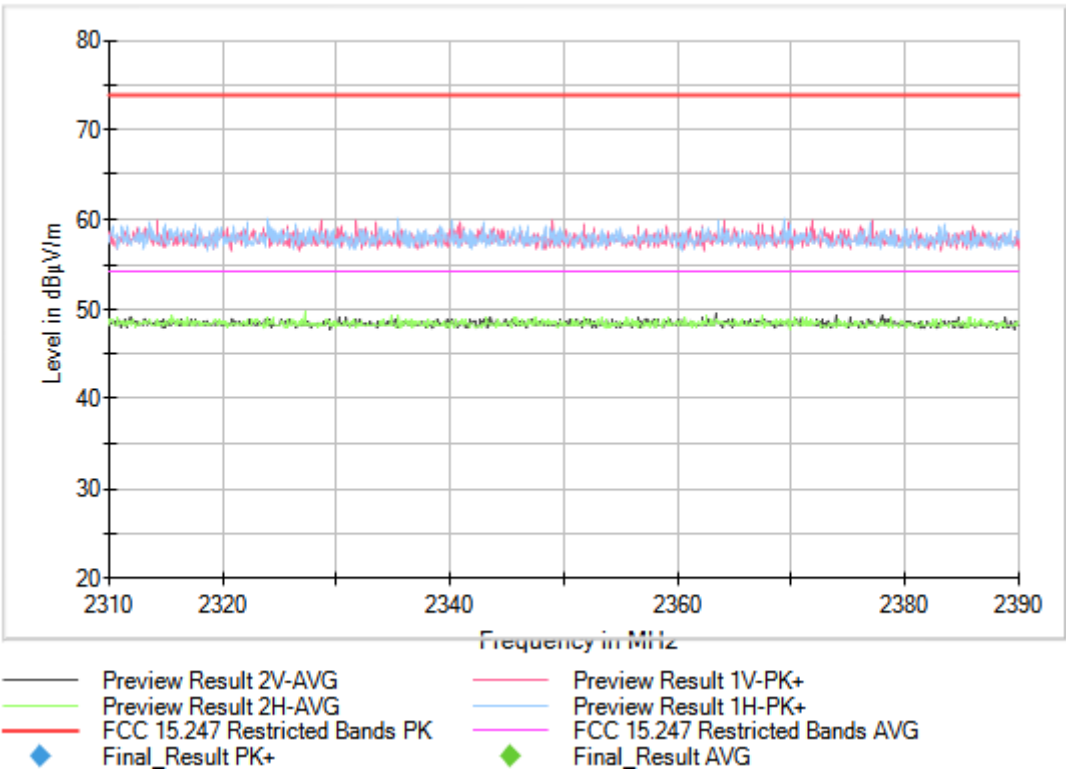



Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2480.00000


Active Port = 2


Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

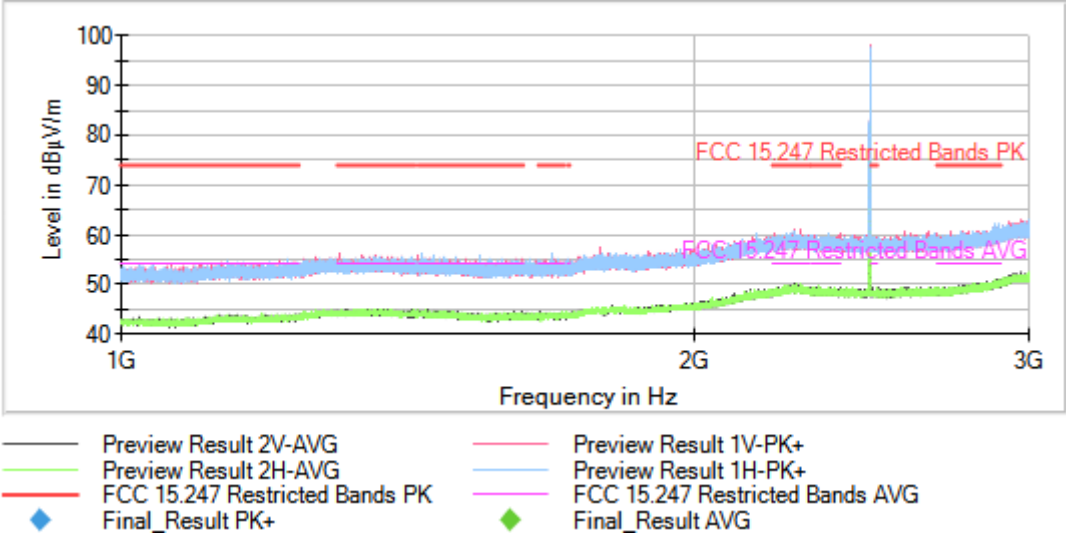

Full Spectrum

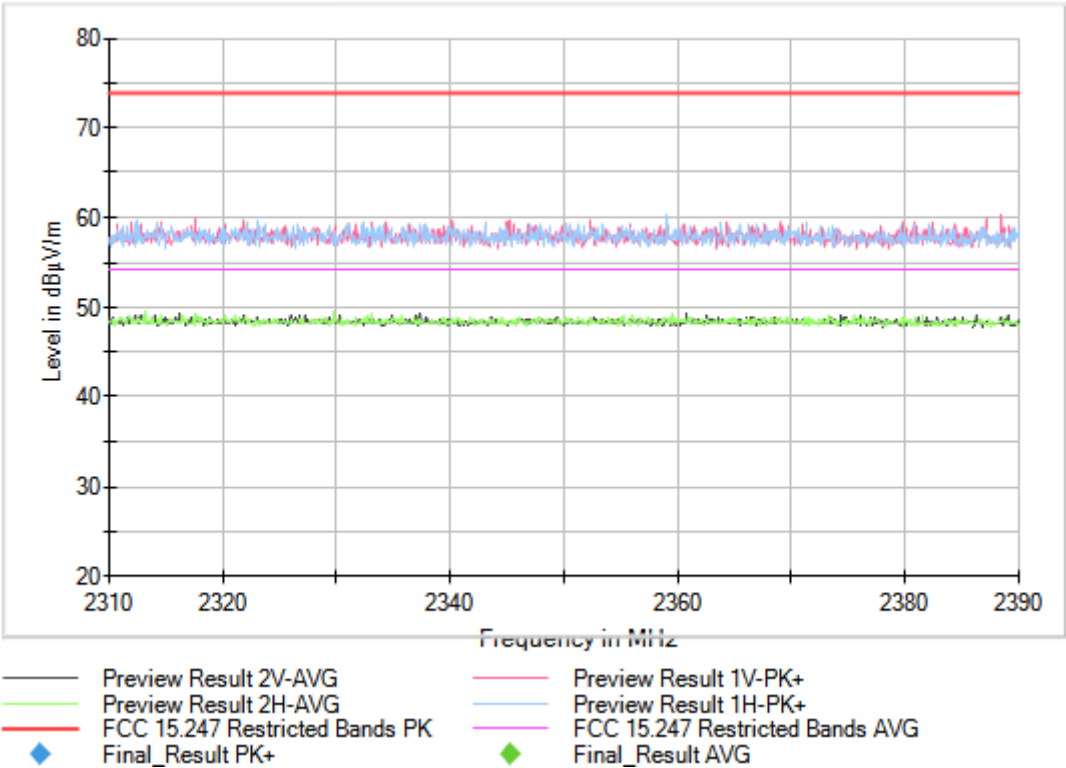

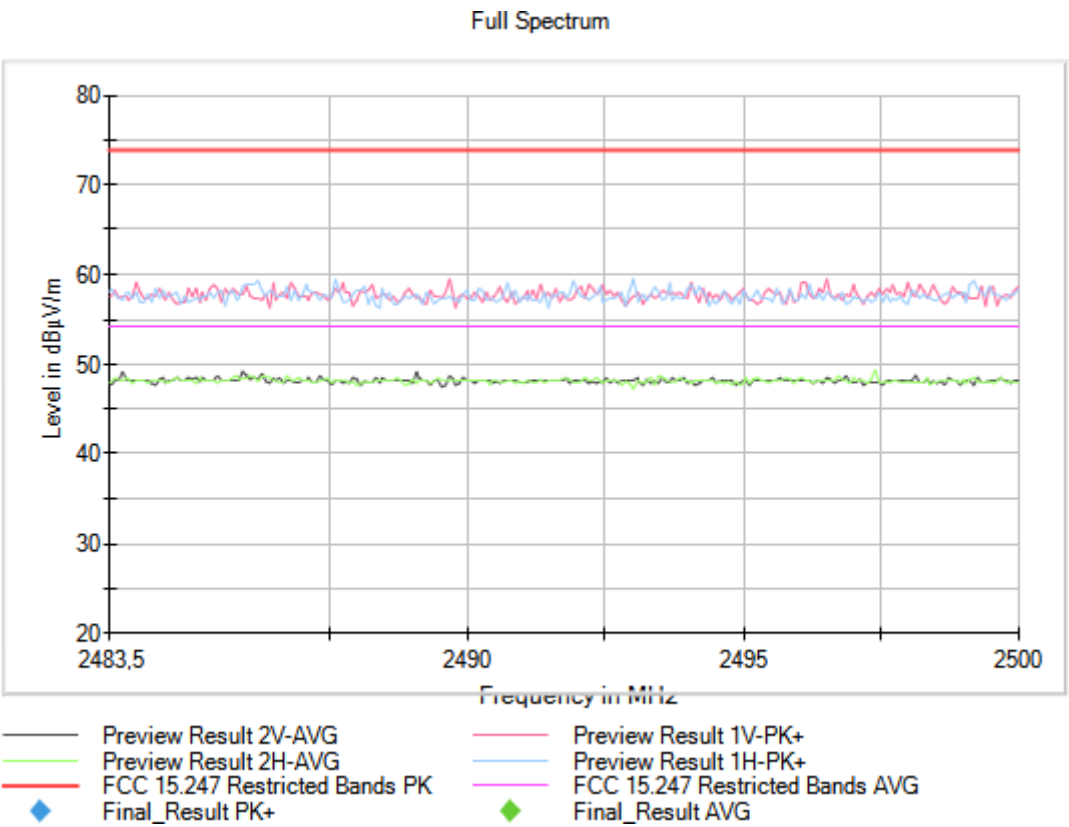

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems
(DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

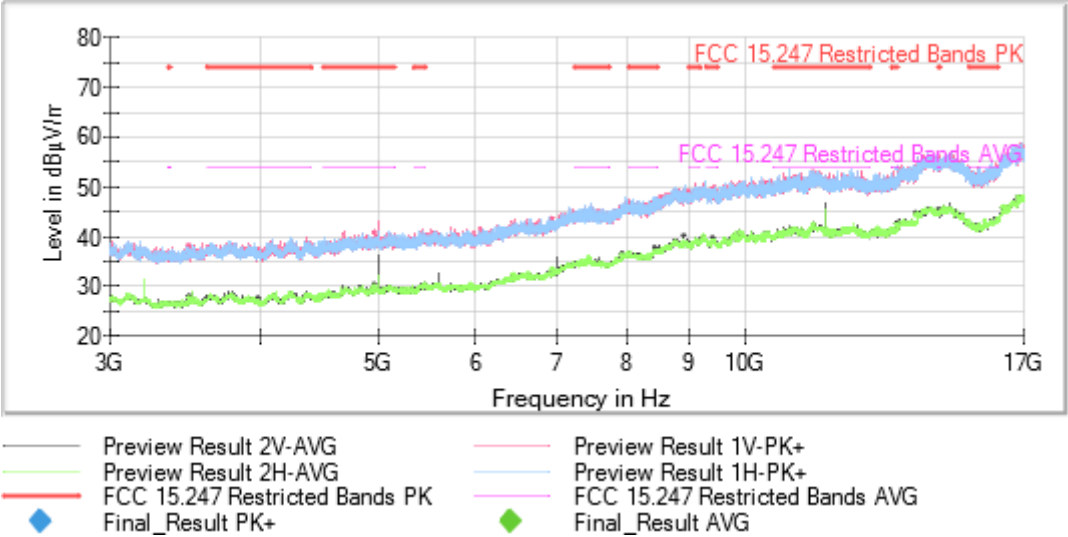

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2440.00000

Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

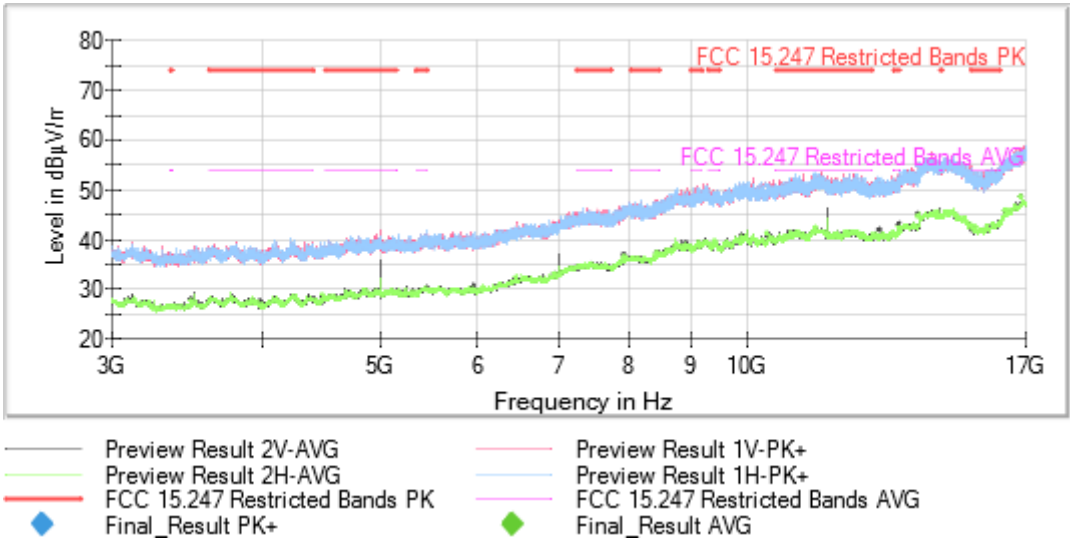

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

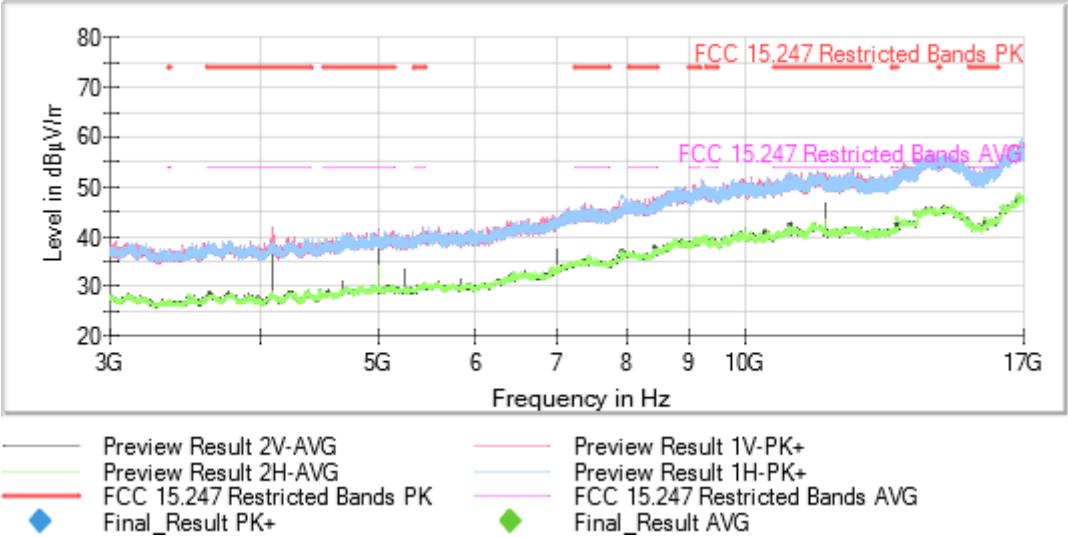

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Active Port = 1

Operation Band MHz = [2400, 2483.5]

Frequency MHz = 2440.00000

Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

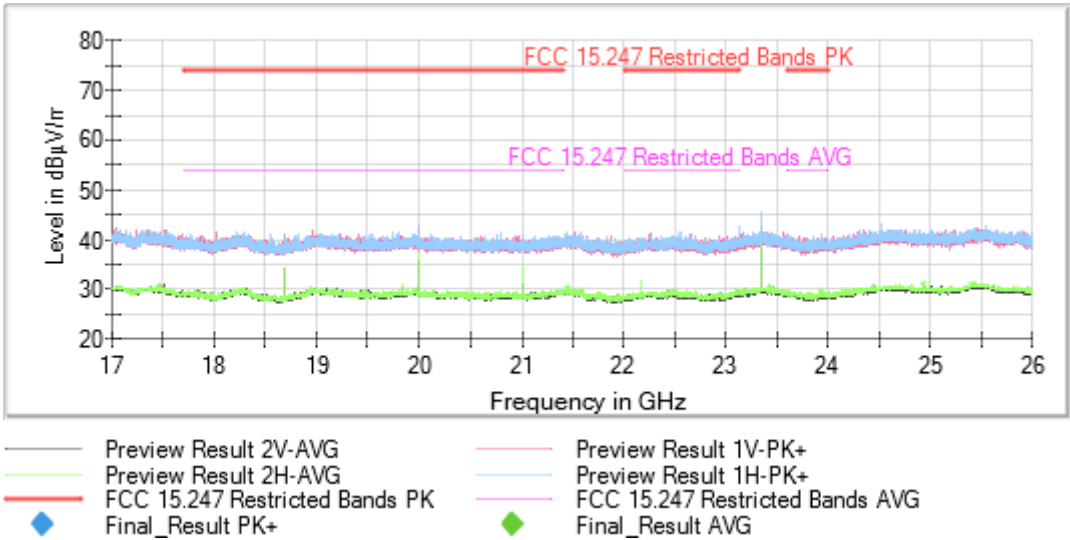

This plot is valid for all channels

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Modulation: BT (8DPSK 3-DH5)

Results

Frequency range: 30MHz – 1GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Frequency range: 1GHz – 3GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 3GHz – 17GHz

No spurious frequencies detected within 20 dB of the limit.

Frequency range: 17GHz – 26GHz

No spurious frequencies detected within 20 dB of the limit. The results do not depend on modulation and channel operation

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)


Active Port = 1

Operation Band MHz = [2400, 2483.5]

Frequency MHz = 2402.00000

Modulation = BT (8DPSK 3-DH5)

Images:

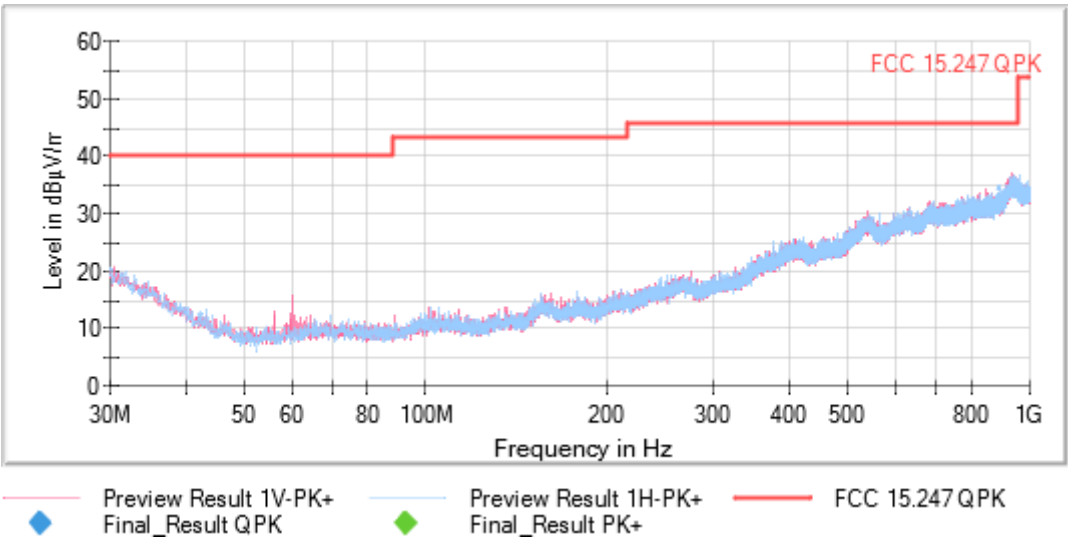

This plot is valid for all channels

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000


Active Port = 1


Modulation = BT (8DPSK 3-DH5)

Images:

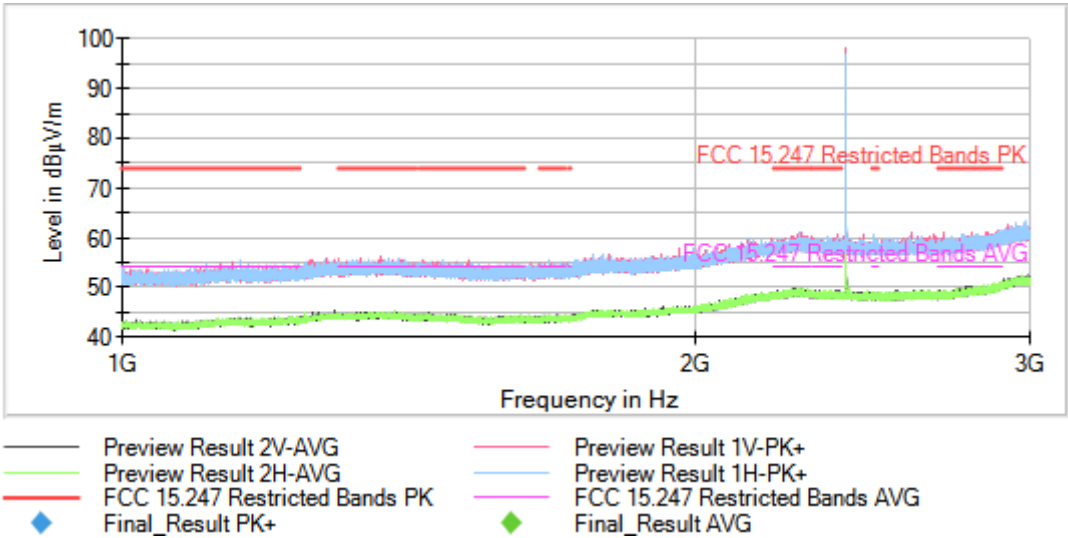

Full Spectrum

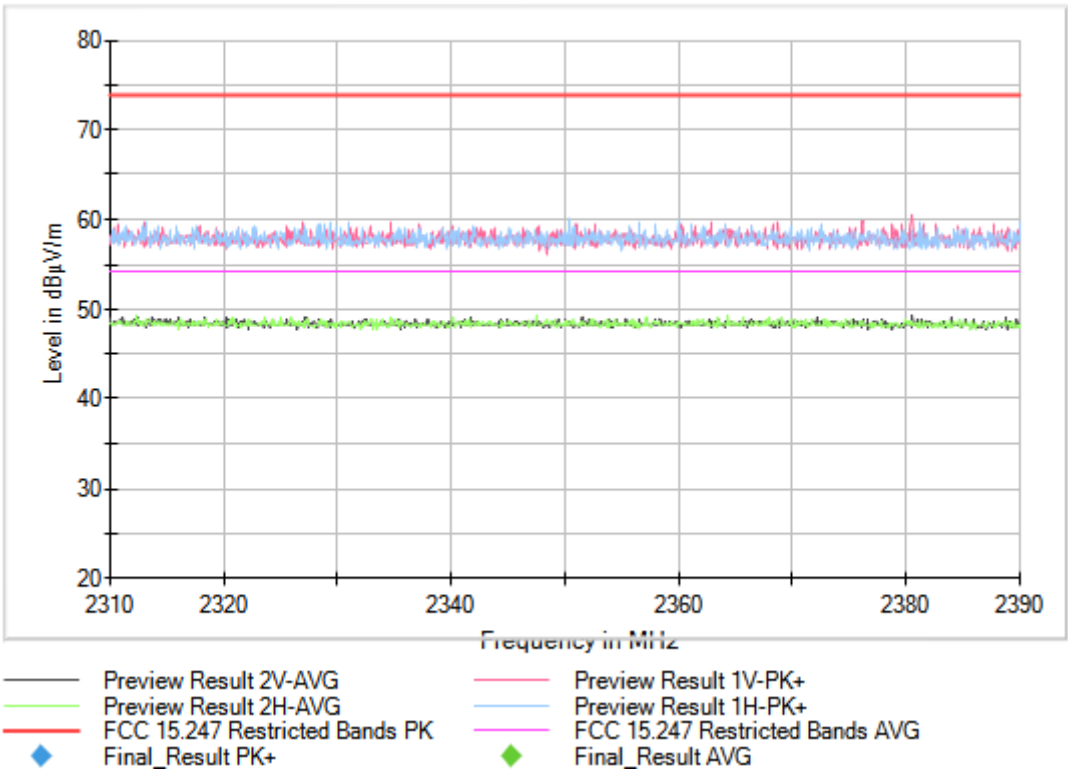

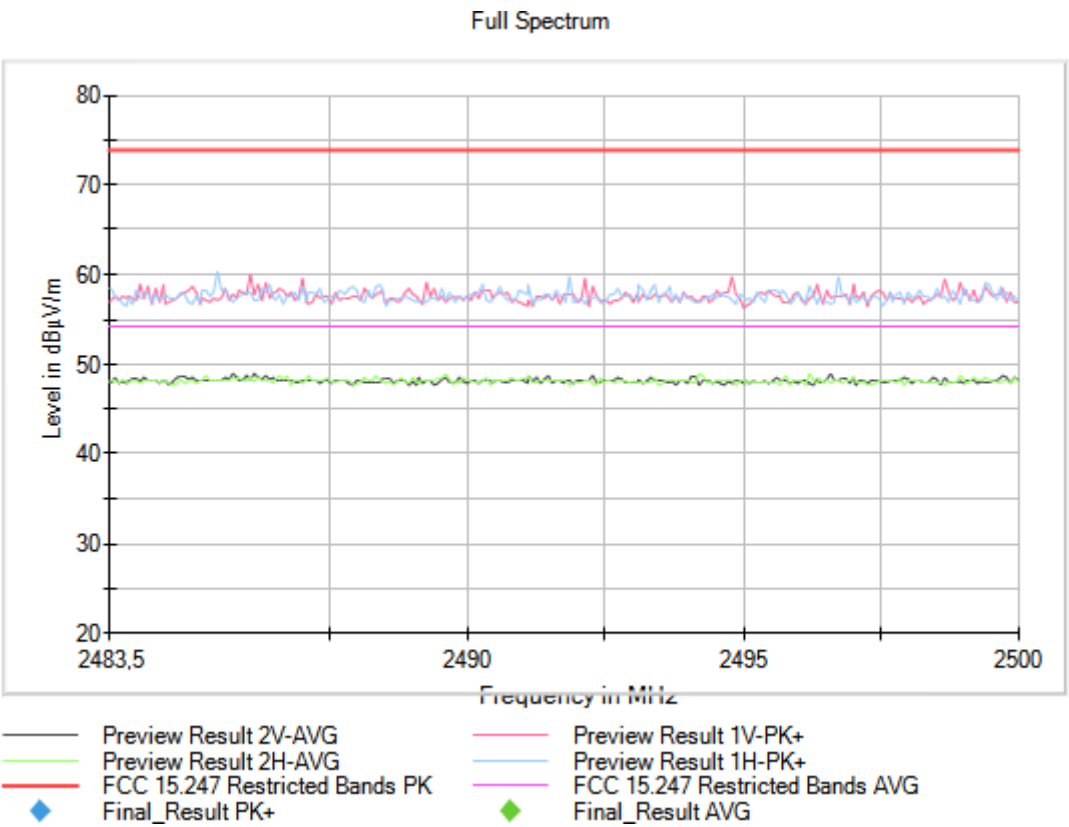

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2441.00000


Active Port = 1


Modulation = BT (8DPSK 3-DH5)

Images:

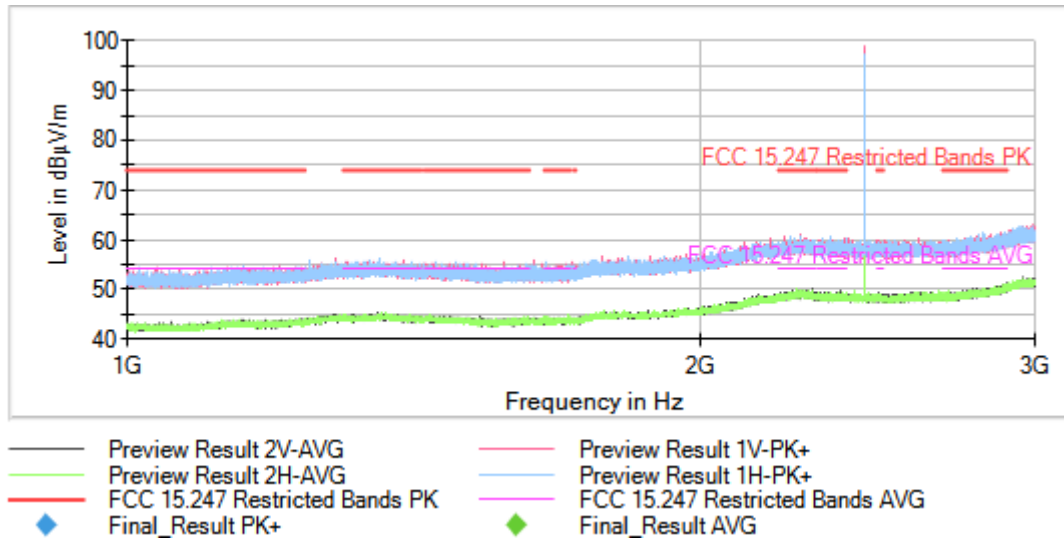

Full Spectrum

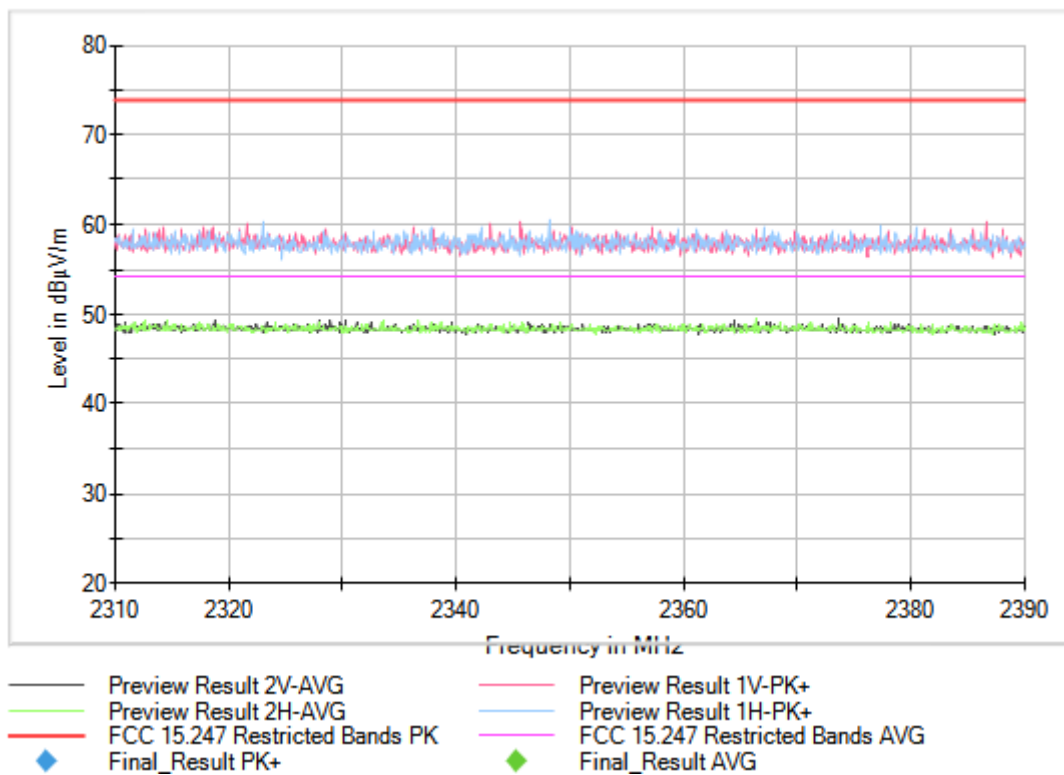

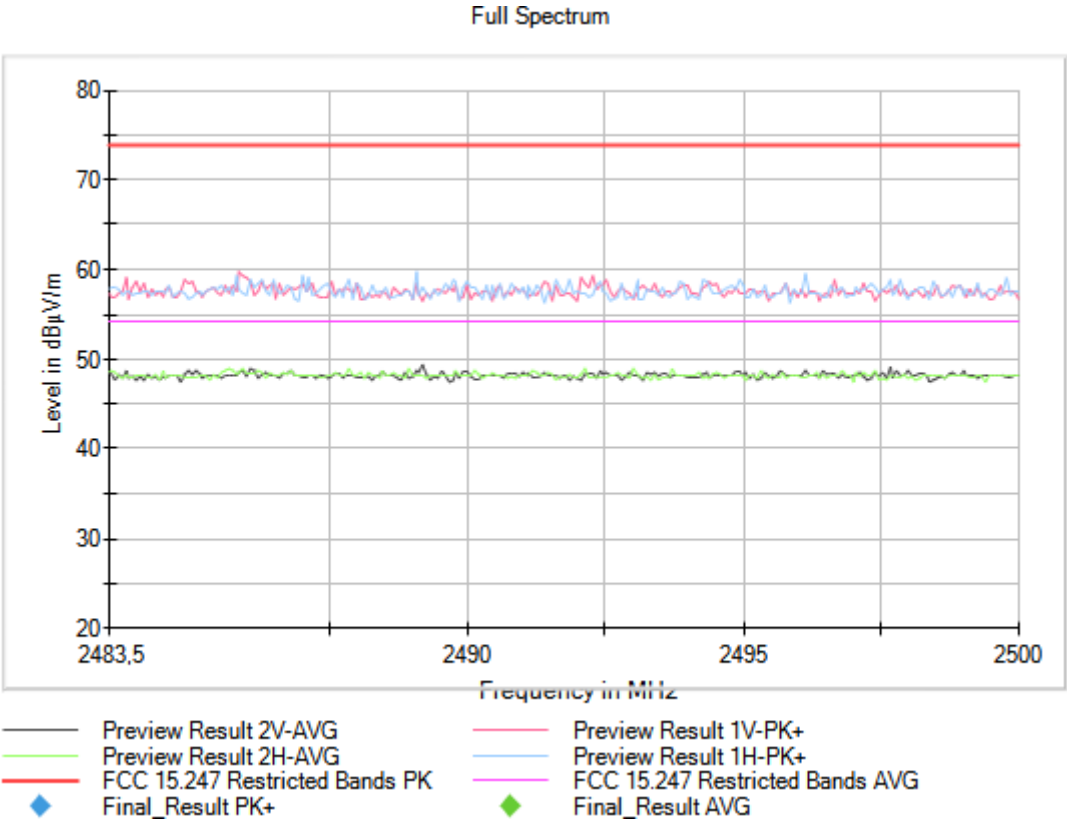

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000


Active Port = 1


Modulation = BT (8DPSK 3-DH5)

Images:

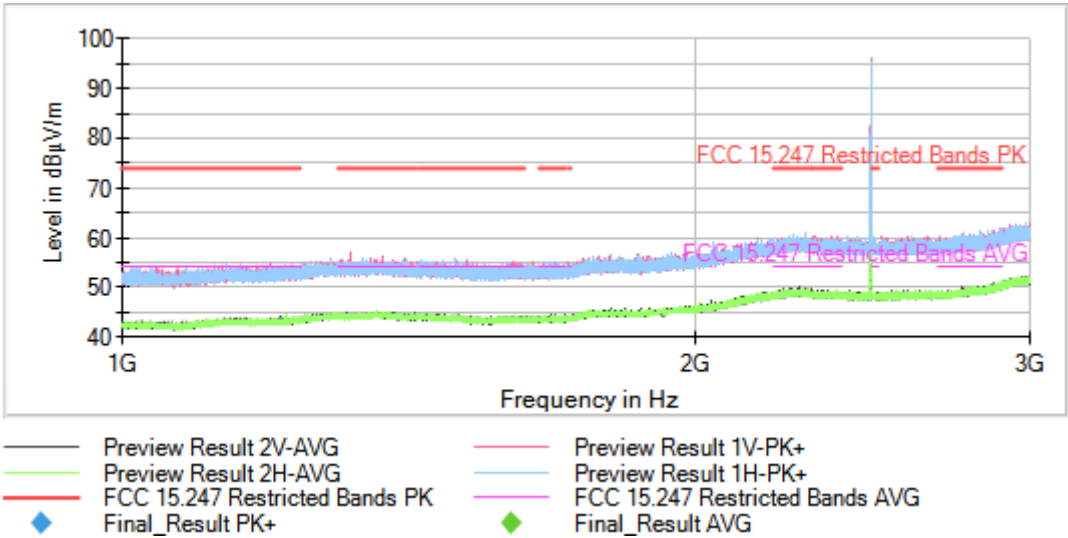

Full Spectrum

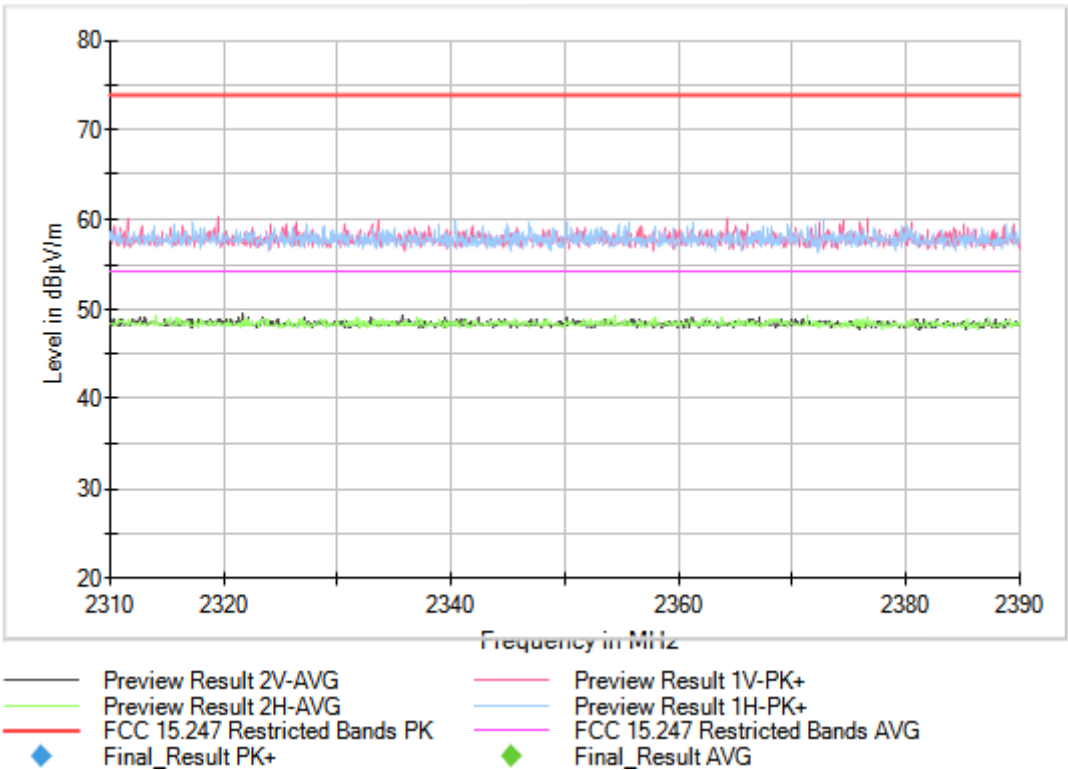

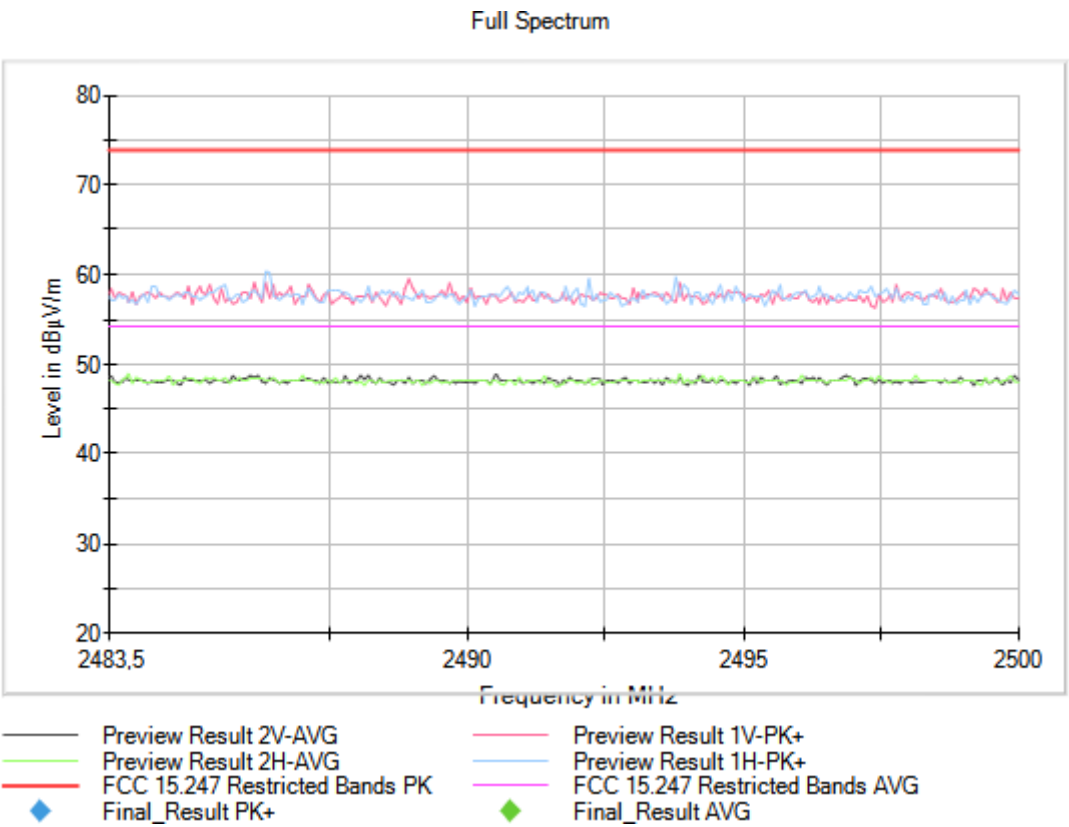

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

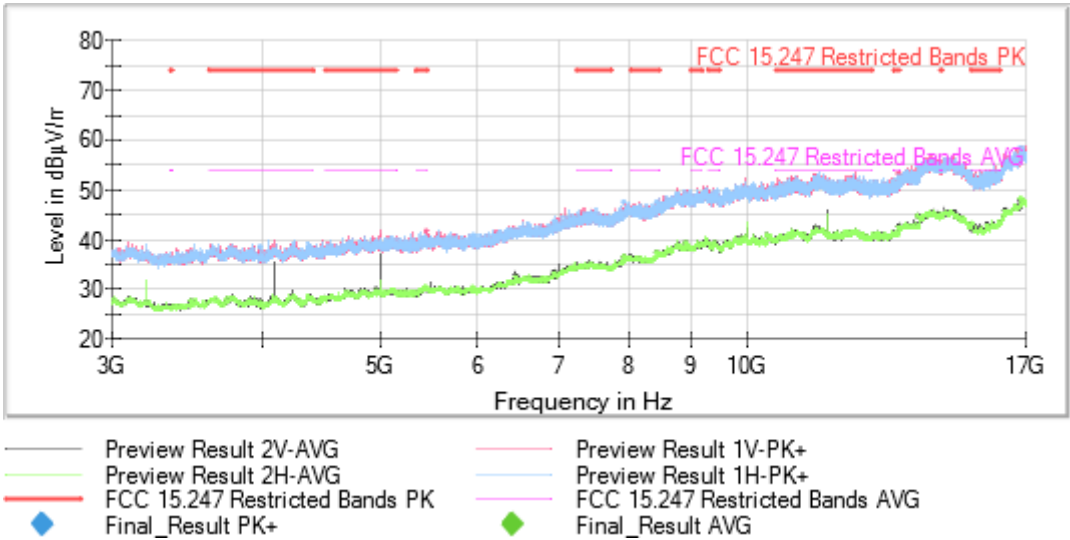

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2440.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

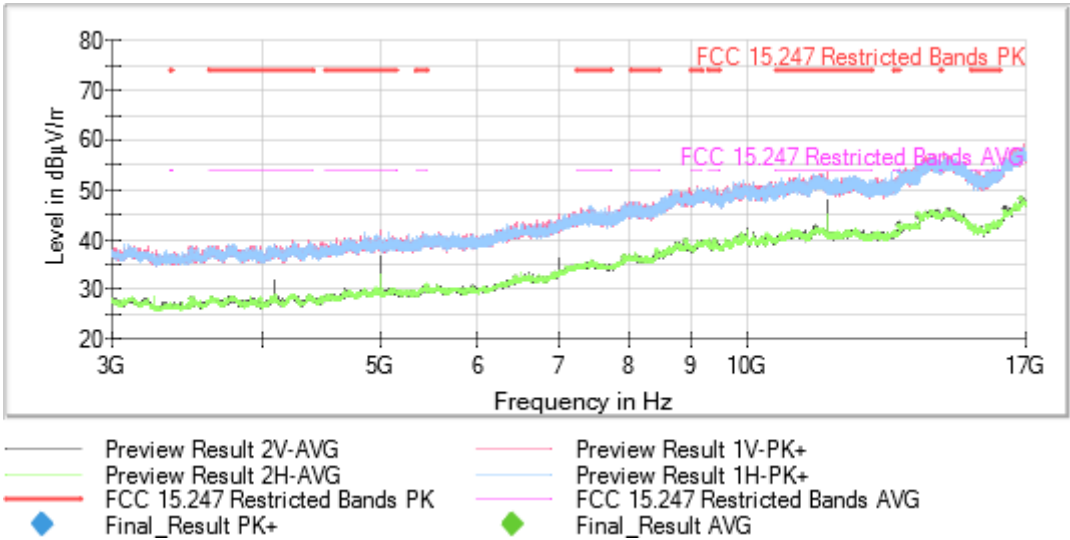

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2480.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

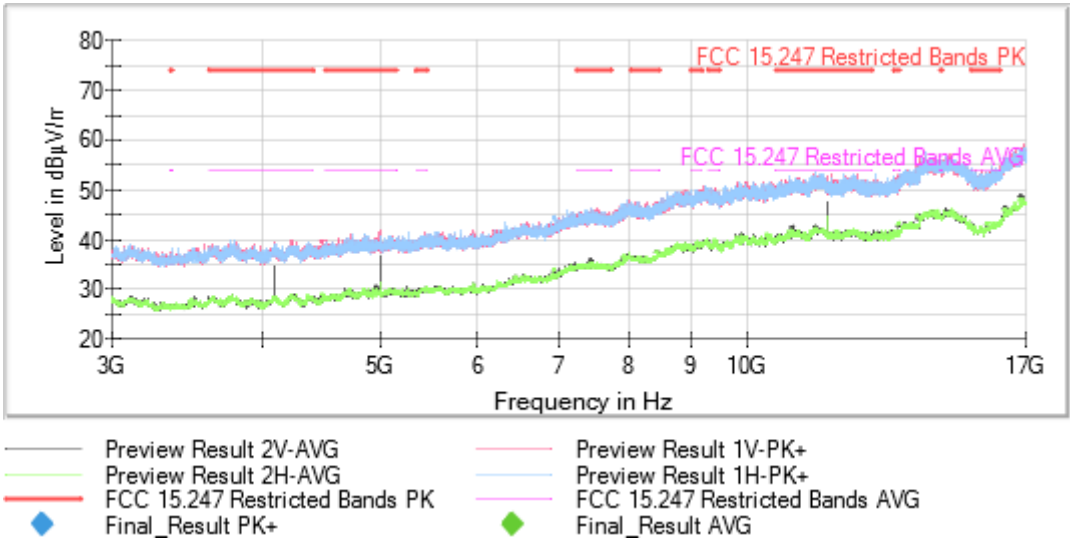

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Frequency MHz = 2402.00000

Active Port = 1

Modulation = BT (8DPSK 3-DH5)

Images:

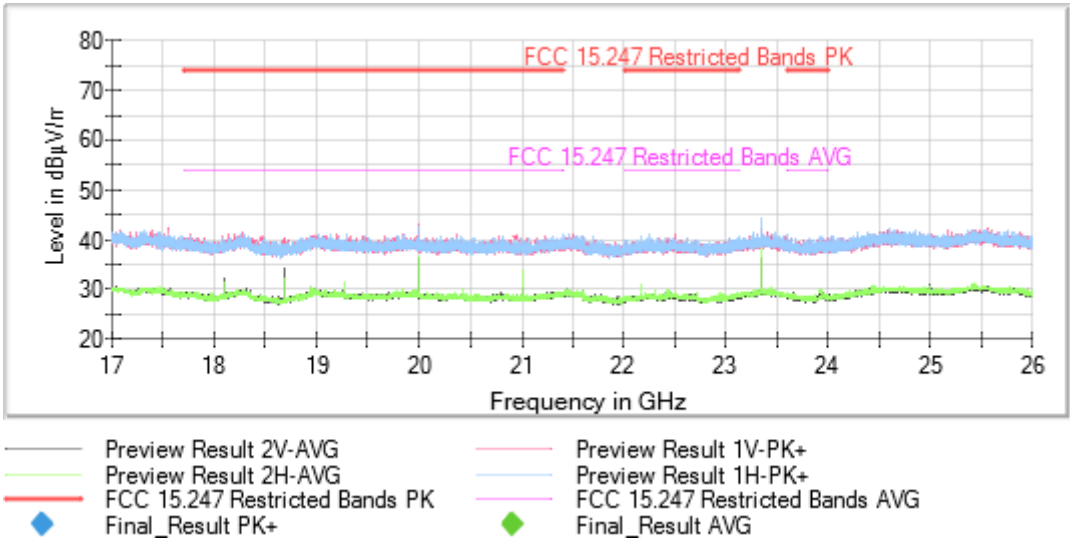

This plot is valid for all channels

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Appendix C: Test results. WLAN 802.11 b/g/n20/ax20. Chipset 1.

INDEX

TEST CONDITIONS 228

TEST CASES DETAILS 231

 99dBw Occupied Channel Bandwidth 99% 231

 RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth 253

 RSS-247 5.4 / FCC 15.247 (b) [Avcp] Maximum Average Conducted Output Power 281

 RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter) 309

 RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter) 350

 [Psd] Power Spectral Density 450

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal: 12Vdc
Type of Power Supply: External power supply (Vehicle Battery)

ANTENNA (*):

Type of Antenna: External antenna
Maximum Declared Antenna Gain: 0.318dBi

TEST FREQUENCIES (*):

Modulation	Data rates	Low Channel:	Middle Channel	High Channel
802.11b:	1 Mbit/s	2412 MHz	2437 MHz	2462 MHz
802.11g:	6 Mbit/s	2412 MHz	2437 MHz	2462 MHz
802.11n:	HT20 MCS0 6.5 Mbit/s	2412 MHz	2437 MHz	2462 MHz
802.11ax:	HE20 (OFDMA MCS0)	2412 MHz	2437 MHz	2462 MHz

During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes and test channels as required.

WORST CASE DETERMINATION

The RF output power has been measured to determine the highest power level between Core 0 (Port 3) and Core 1 (Port 4). As a result, the **worst case is Core 0 (Port 3)**.

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable.

The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

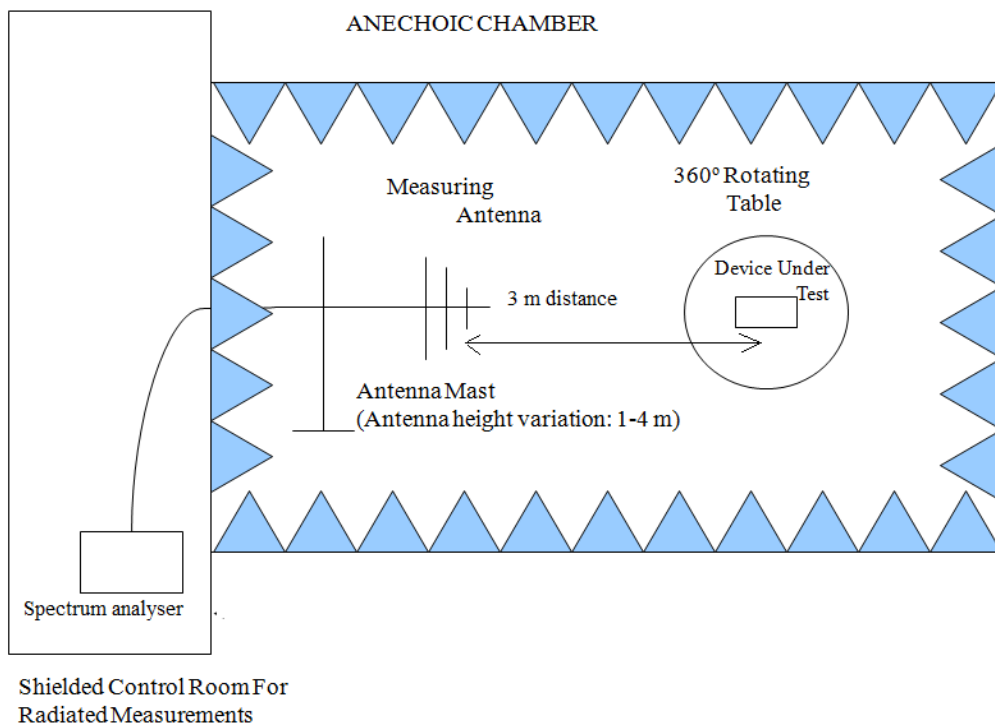

Radiated measurements setup from 1 GHz to 17 GHz:

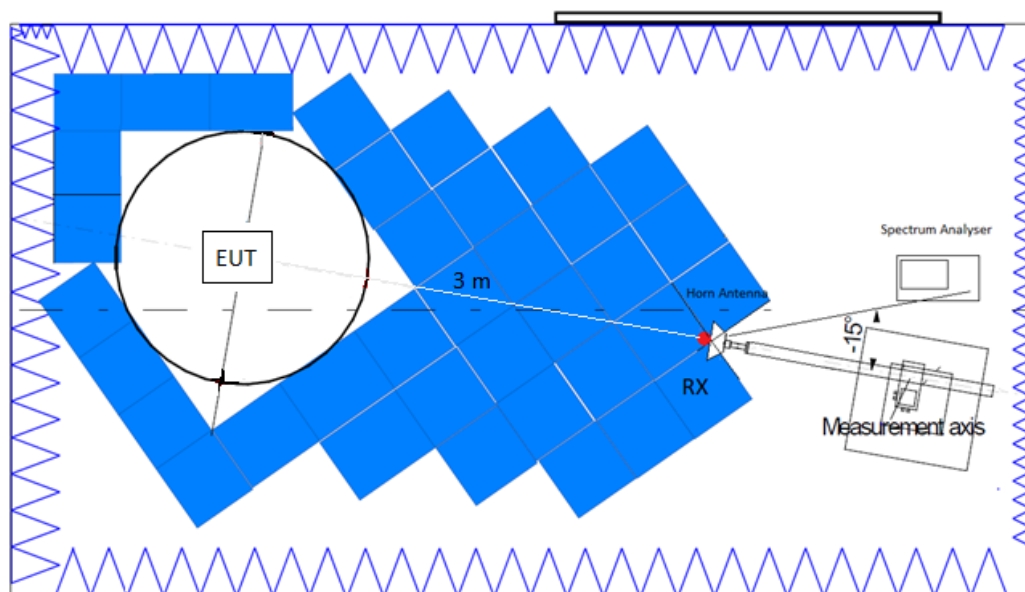

Radiated measurements setup $f > 17$ GHz:

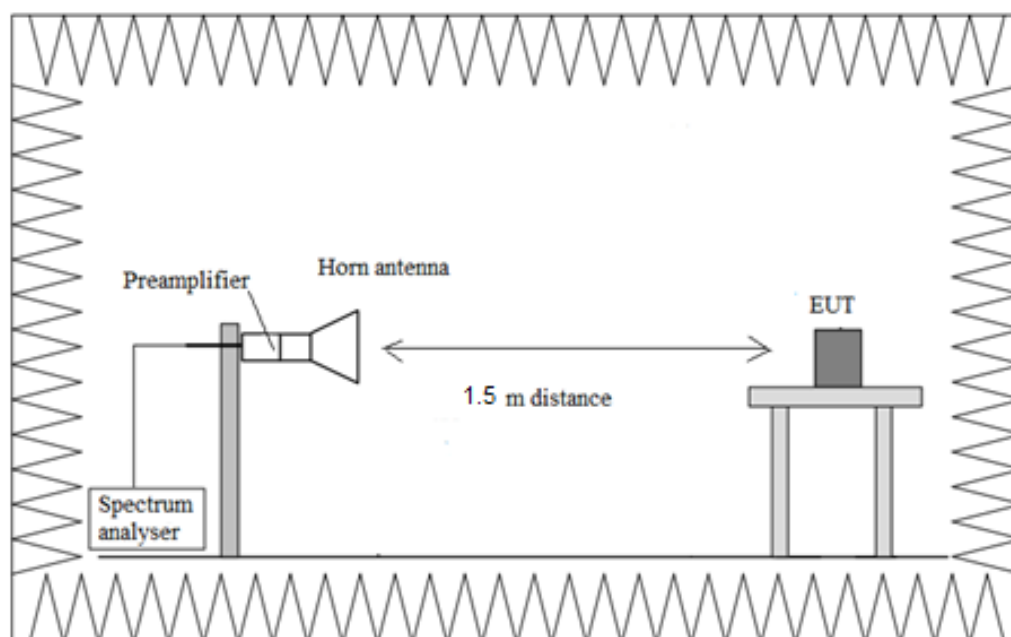

TEST CASES DETAILS

99dBw Occupied Channel Bandwidth 99%

Limits

RSS-Gen 6.7 / FCC 2.1049 - Occupied Channel Bandwidth 99%

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Modulation: 802.11b (DSSS 1 Mbit/s)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Occ Ch BW (MHz)
[2400, 2483.5]	Digital Transmission System (DTS)	2412.00000	3	11.800
		2437.00000		11.700
		2462.00000		11.700



Verdict

Pass

Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2412.00000 Active Port = 3
Modulation = 802.11b (DSSS 1 Mbit/s)

Images:

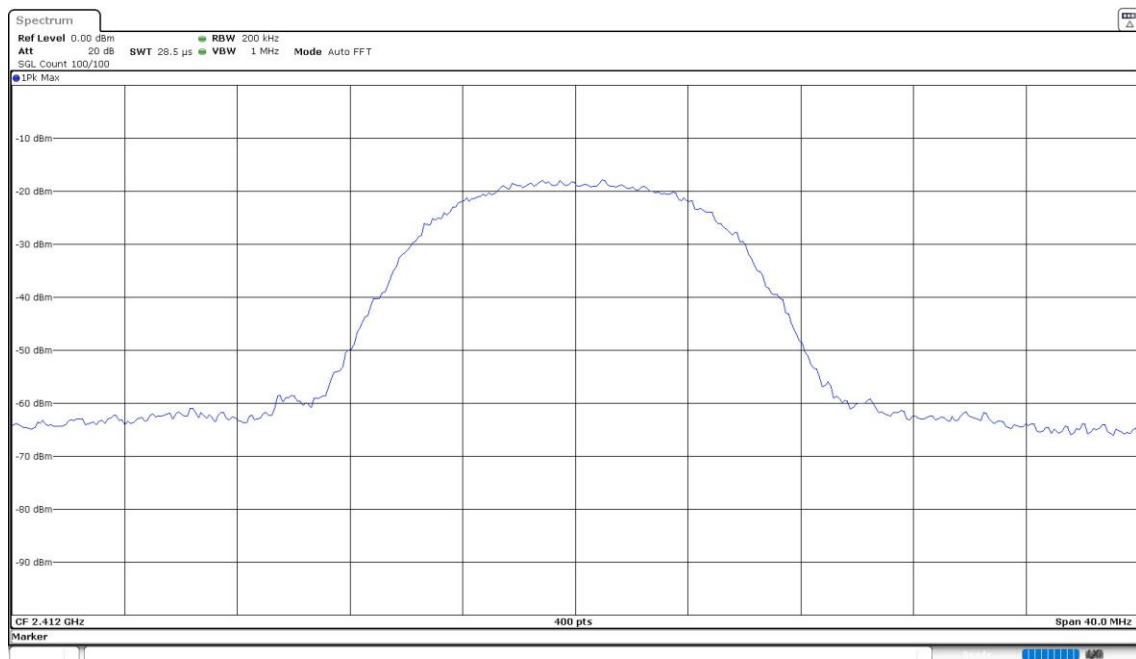
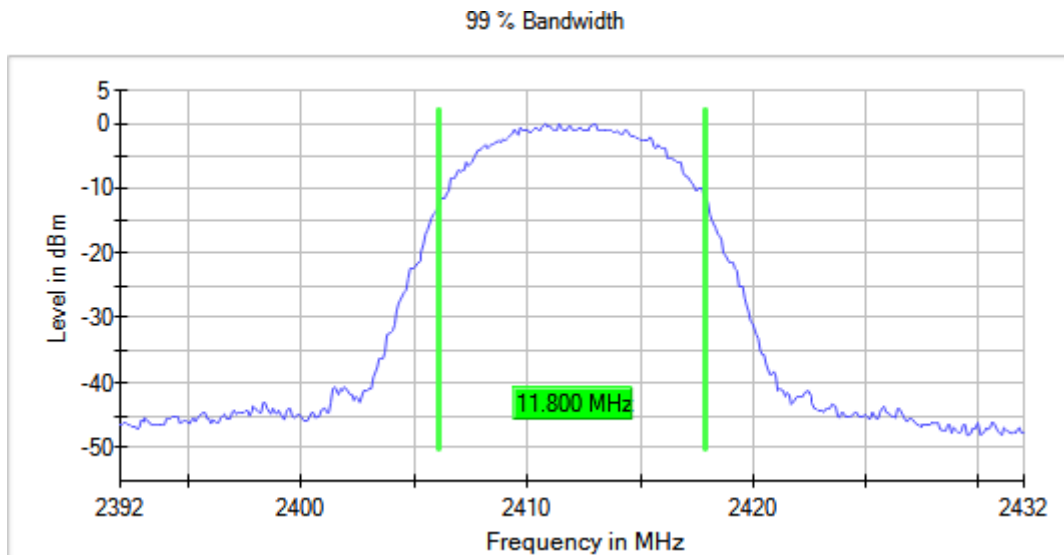


Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)

Frequency MHz = 2437.00000 Active Port = 3



Modulation = 802.11b (DSSS 1 Mbit/s)

Images:

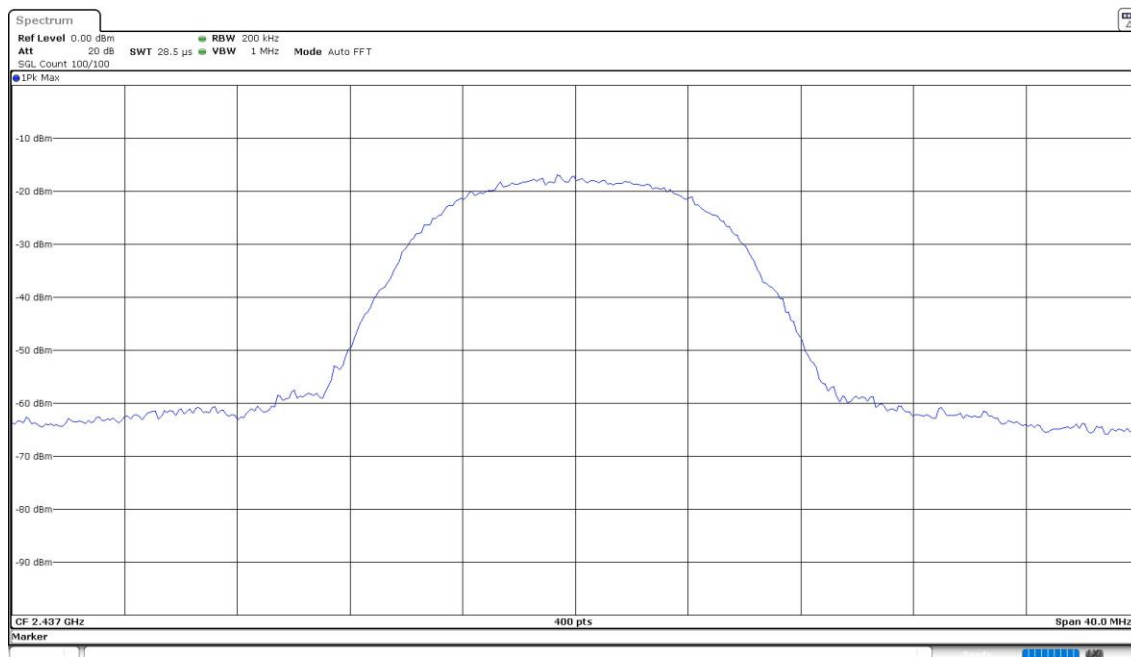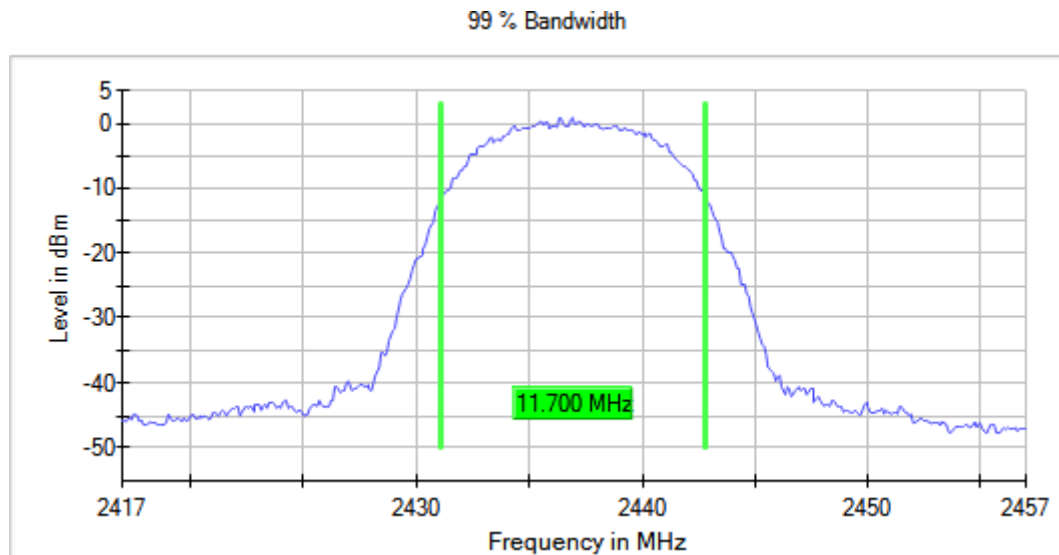

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
 Frequency MHz = 2462.00000 Active Port = 3
 Modulation = 802.11b (DSSS 1 Mbit/s)

Images:

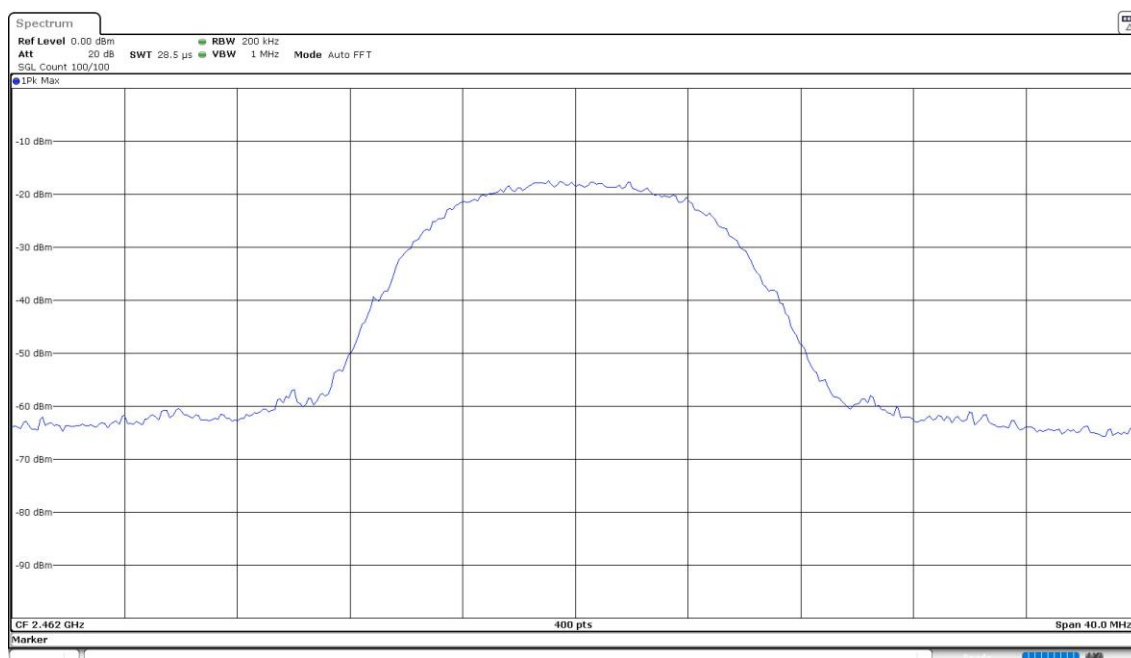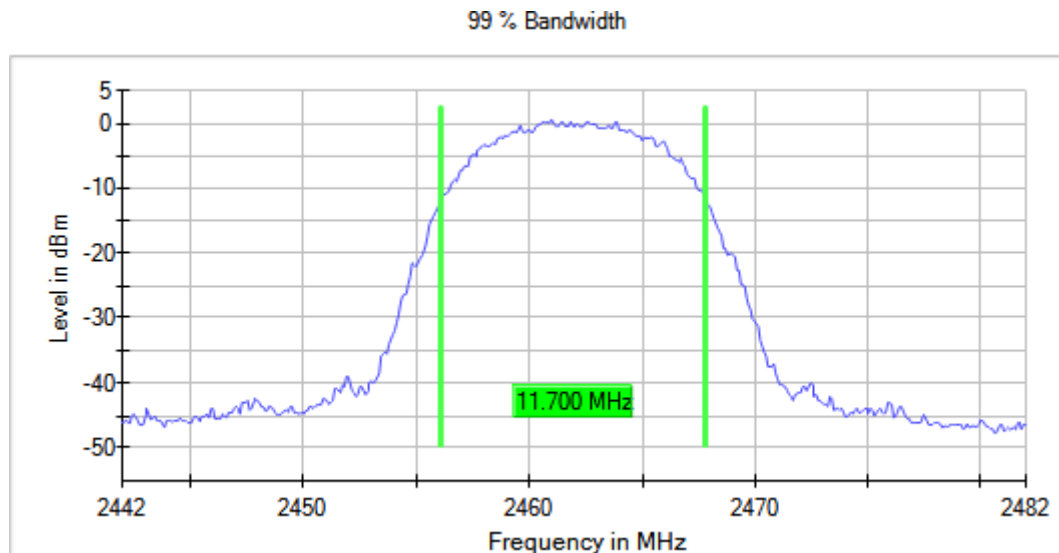

Modulation: 802.11g (OFDM 6 Mbit/s)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Occ Ch BW (MHz)
[2400, 2483.5]	Digital Transmission System (DTS)	2412.00000	3	16.600
		2437.00000		16.600
		2462.00000		16.600

Verdict

Pass



Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)

Frequency MHz = 2412.00000 Active Port = 3

Modulation = 802.11g (OFDM 6 Mbit/s)

Images:

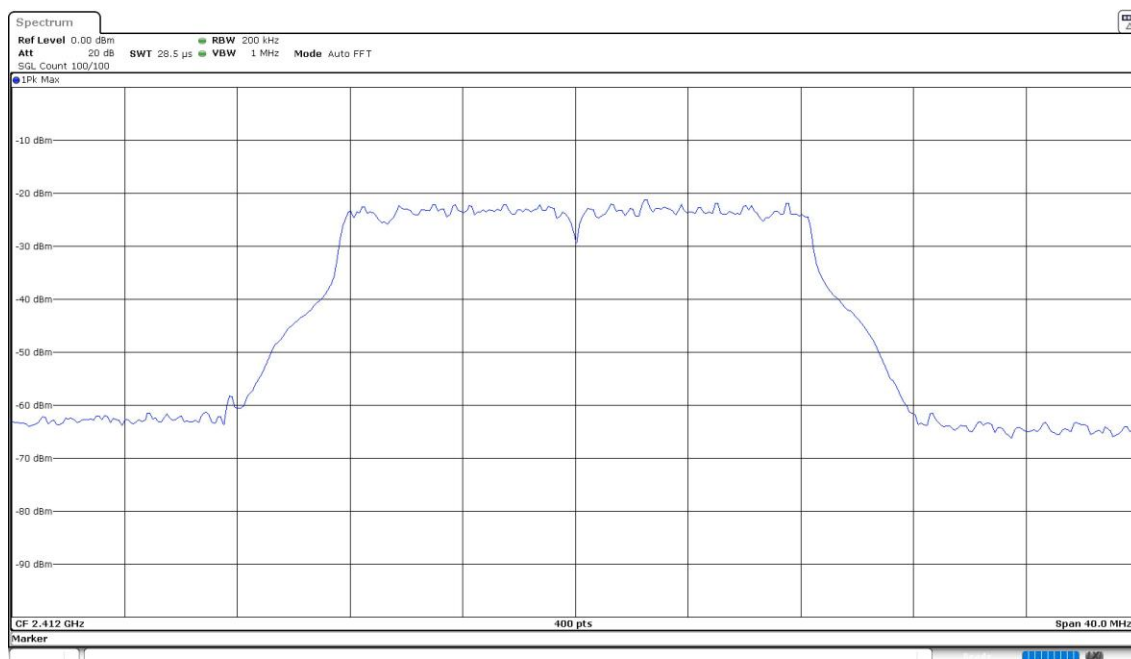
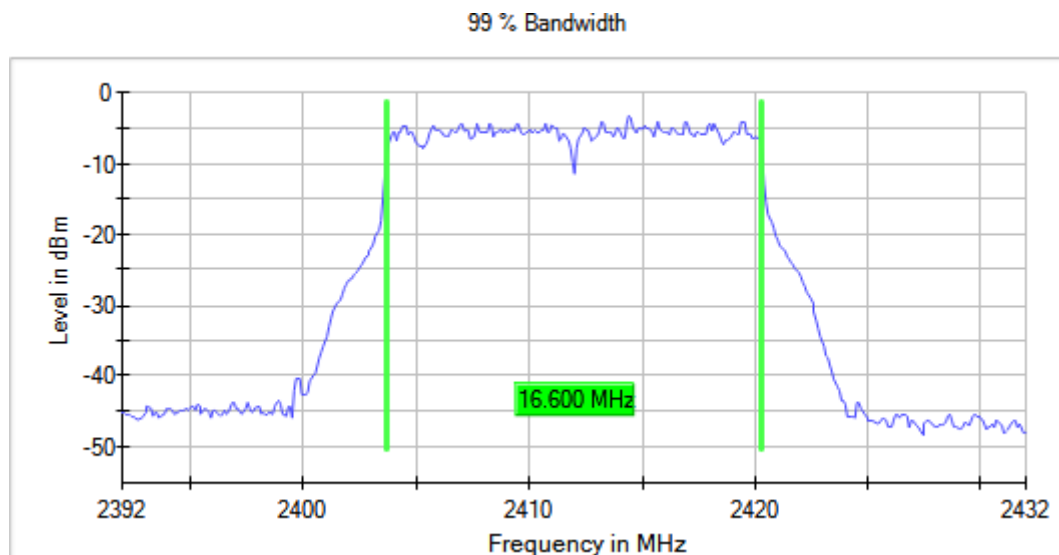


Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)

Frequency MHz = 2437.00000 Active Port = 3



Modulation = 802.11g (OFDM 6 Mbit/s)

Images:

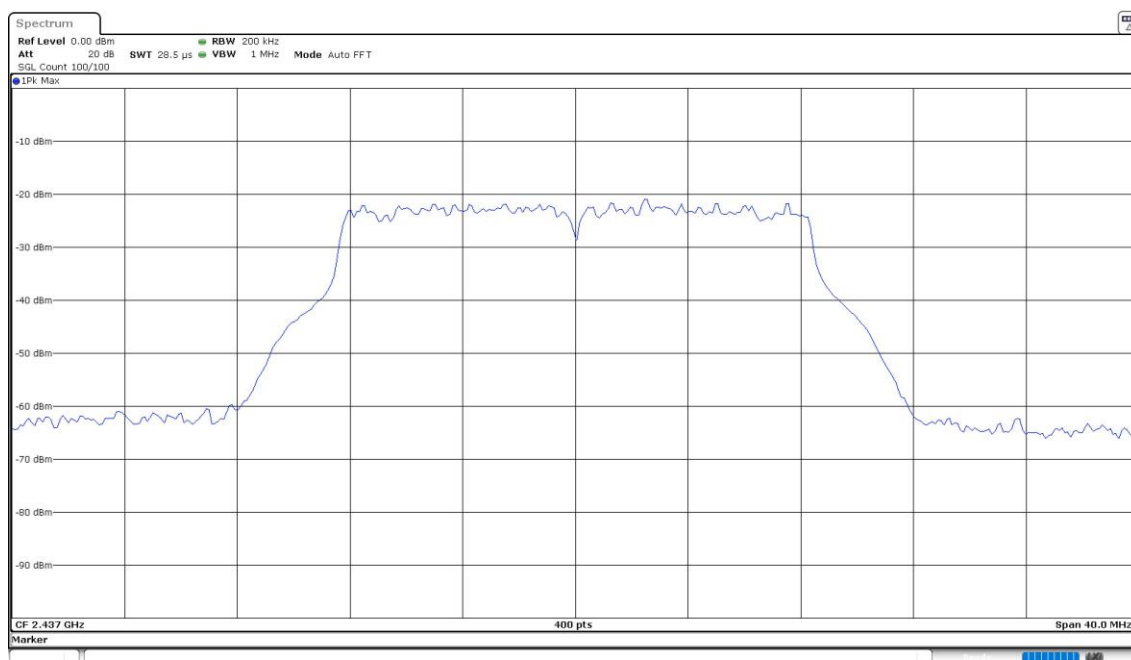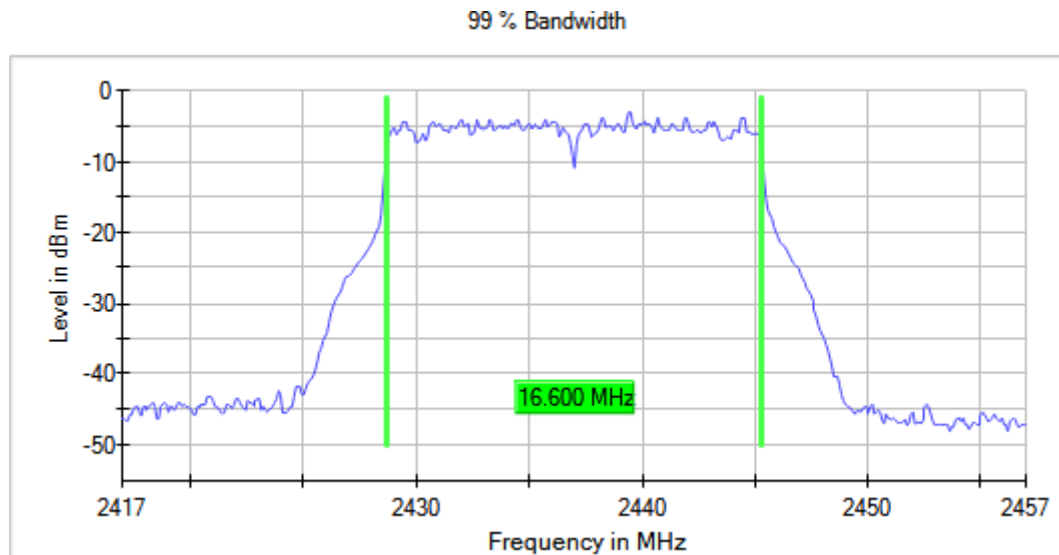

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
 Frequency MHz = 2462.00000 Active Port = 3
 Modulation = 802.11g (OFDM 6 Mbit/s)

Images:

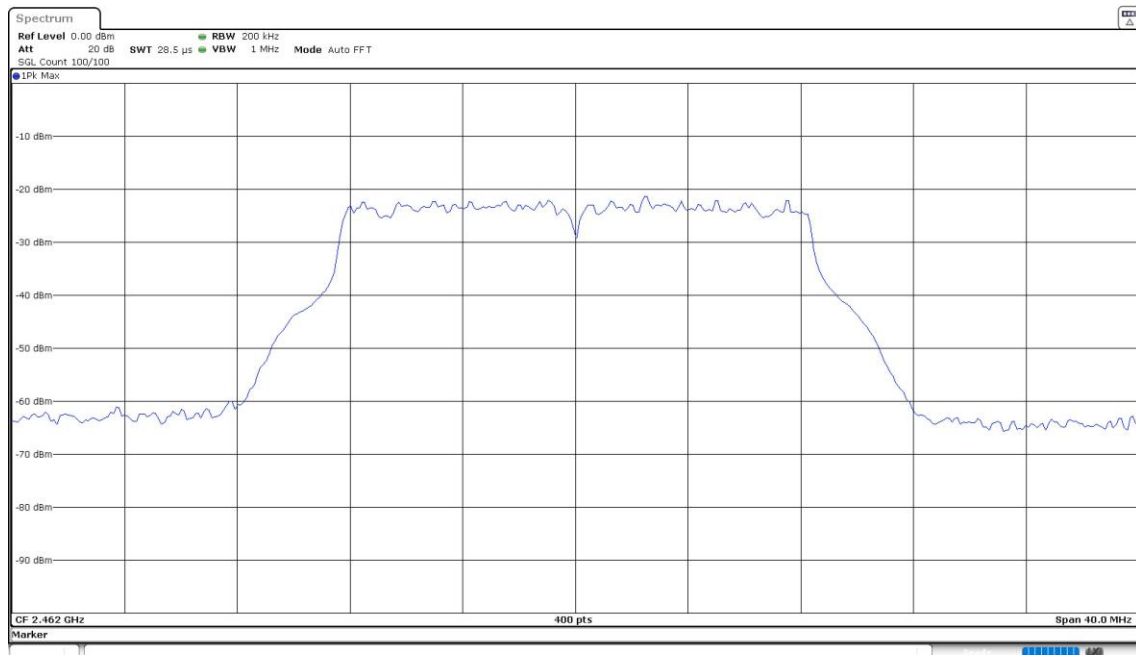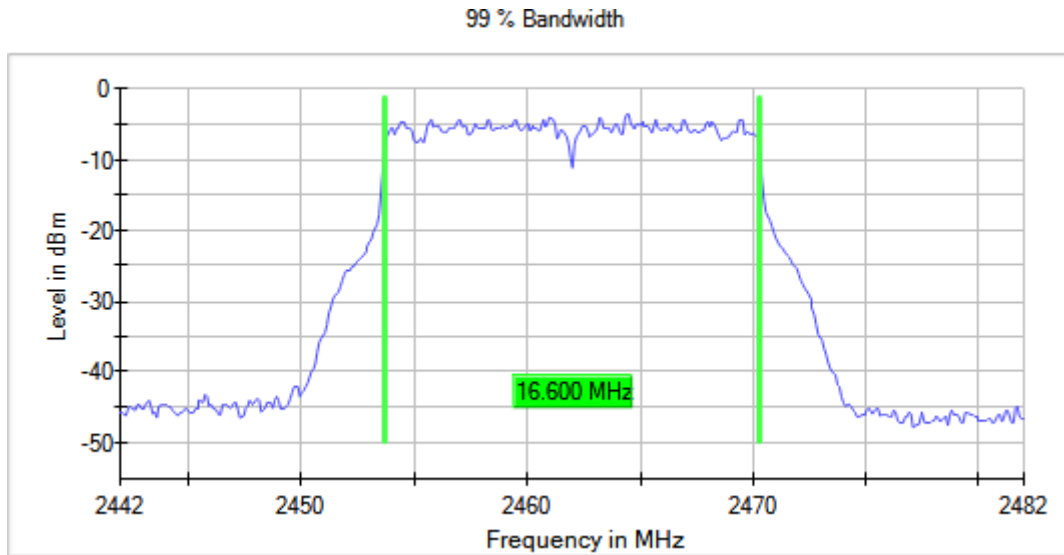

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	RU (Tone/Index)	Occ Ch BW (MHz)
[2400, 2483.5]	Digital Transmission System (DTS)	2412.00000	3		17.700
		2437.00000			17.700
		2462.00000			17.700
		2412.00000	3+4	-	17.700
		2437.00000			17.600
		2462.00000			17.700

Verdict

Pass

Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2412.00000 Active Port = 3
Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s) Resource Unit Tone/Index =

Images:

