



EMI TEST REPORT

Test Report No.: 26HE0324-YK-F

Applicant : ASAHI DENSO CO., LTD.
Type of Equipment : Immobilizer
Model No. : KZ42
FCC ID : T8VKZ42
Test Standard : FCC Part15 Subpart C, Section 15.209: 2006
Test Result : Complied

1. This test report shall not be reproduced except in full, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above regulation.
4. The test results in this test report are traceable to the national or international standards.

Date of test: April 17, 2006

Tested by: 
Toyokazu Imamura

Approved by: 
Osamu Watatani
Site Manager of Yamakita EMC Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

Table of Contents	Page
1 Applicant Information	3
2 Product Description	3
3 Test Specification, Procedures and Results	4
4 System Test Configuration	6
5 Radiated Emissions (Fundamental & Spurious)	7
6 20dB Bandwidth and Occupied Bandwidth	8
 <u>Contents of Appendixes</u>	 9
APPENDIX 1: Photographs of test setup	10
APPENDIX 2: Test Data	13
APPENDIX 3: Test instruments	17

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

1 Applicant Information

Company Name : ASAHI DENSO CO., LTD.
Brand Name : AD
Address : 1126 Nakajo, Hamamatsu-shi, Shizuoka-ken, 434-0043 Japan
Telephone Number : +81-53-587-2195
Facsimile Number : +81-53-584-1589
Contact Person : Akihiko Tsuchikiri (tsuchia@ad-asahidenso.co.jp)

2 Product Description

Type of Equipment : Immobilizer
Model No. : KZ42
Serial No. : 64051
Rating : DC12.0V (DC8-16V), 0.1A
Country of Manufacture : Japan
Receipt Date of Sample : April 7, 2006
Condition of EUT : Production prototype
(Not for sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.

The clock frequency used in EUT: 4MHz, 16MHz

Equipment type : Transceiver
Frequency of operation : 134.2 kHz
Type of modulation : ASK
Antenna type : Integral coil antenna
Antenna connector type : Soldering
Mode of operation : Duplex
Emission Designation : A0N
Operation temperature range: -20 ~ 80 deg. C.
Duty Cycle : Very High (Up to 100%)

*FCC Part 15.31 (e)

The module is provided stable power supply (DC 5V), and the power is not changed when voltage of the main unit is varied. Therefore, the equipment complies power supply regulation.

*FCC Part 15.203

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the requirement.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b (19.04.06)

3 Test Specification, Procedures and Results

3.1 Test specification

Test specification : FCC Part15 Subpart C: 2006
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
 Section 15.209: Radiated emission limits, general requirements

3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted Emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Section 15.207	AC Mains	N/A *1	N/A	N/A
Electric Field Strength of Fundamental Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section 15.209	Radiated	N/A	34.4dB (AV, Horizontal)	Complied
Electric Field Strength of Spurious Emission	ANSI C63.4: 2003 13. Measurement of intentional radiators	Section15.209	Radiated	N/A	25.3dB (QP, 54.04MHz, Vertical)	Complied
20dB Bandwidth	ANSI C63.4: 2003 13. Measurement of intentional radiators	-	Radiated	N/A	-	Complied

*1) The test is not applicable since the EUT has no AC mains.

Note: UL Apex's EMI Work Procedures No.QPM05.

* No addition, exclusion nor deviation has been made from the standard.

3.3 Uncertainty

Radiated emission

The measurement uncertainty (with 95% confidence level) for this test using Loop antenna is ± 2.3 dB.

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is ± 4.3 dB.

The data listed in this test report has enough margin, more than site margin.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

3.4 Test Location

UL Apex Co., Ltd. Yamakita EMC Lab.
907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN
Telephone number : +81 465 77 1011
Facsimile number : +81 465 77 2112
NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on August 26, 2005 (Registration No.: 95486).

IC Registration No. : IC3489A

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on April 4, 2005 (Registration No.: 466226).

IC Registration No. : IC3489A-2

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on November 2, 2005 (Registration No.: 95967).

IC Registration No. : IC3489A-B

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1 EMS lab. (Semi-anechoic chamber)	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5		
No.3 shielded room	4.0 x 5.0 x 2.7		

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)


4 System Test Configuration

4.1 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

Operation: Transmitting (134.2kHz)

4.2 Configuration of Tested System

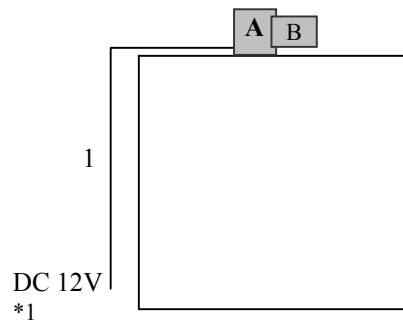

* Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID (Remarks)
A	Immobilizer	KZ42	64051	ASAHI DENSO CO., LTD.	T8VKZ42 (EUT)
B	Immobi Key	KZ42-903	64051	ASAHI DENSO CO., LTD.	(EUT)

*1) DC Power Supply (Model No.: PAN35-10A) was used for DC 12V input.

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC cable	1.05	Unshielded	Unshielded	-

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

5 Radiated Emissions (Fundamental & Spurious)

5.1 Operating environment

The test was carried out in No.1 anechoic chamber.

Temperature : See test data
Humidity : See test data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 80cm above the conducting ground plane. A drawing of the set up is shown in the photos of Appendix 1.

5.3 Test conditions

Frequency range : 9kHz - 1GHz
EUT position : Table top
EUT operation mode : Transmitting

5.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m.

Frequency: From 9kHz to 30MHz

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for each antenna angle 0deg., 45deg. and 90deg.

Frequency: From 30MHz to 1GHz

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

The equipment and its antenna were previously checked at each position of three axes X, Y and Z. The position in which the maximum noise occurred was chosen to put into measurement. See the table and photographs in page 12. With the position, the noise levels of all the frequencies were measured.

* FCC Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

9kHz – 490kHz [Limit at 3m]= [Limit at 300m]-40log (3[m]/300[m])

490kHz – 30MHz [Limit at 3m]= [Limit at 30m]-40log (3[m]/30[m])

5.5 Results

Summary of the test results : Pass Test data: APPENDIX 2 Page 13 to 15
Date : April 17, 2006 Test engineer : Toyokazu Imamura

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

6 20dB Bandwidth and Occupied Bandwidth

6.1 Operating environment

The test was carried out in No.1 anechoic chamber.

6.2 Test procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

20dB Bandwidth : **3.29kHz**
Occupied Bandwidth (99%) : **7.13kHz**

6.3 Results

Summary of the test results: Pass
Date : April 17, 2006

Test data: APPENDIX 2 Page 16
Test engineer : Toyokazu Imamura

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011
Facsimile: +81 465 77 2112

MF060b (19.04.06)

APPENDIX 1: Photographs of test setup

Page 10 - 11	:	Radiated emission
10	:	9kHz - 30MHz
11	:	30 - 1000MHz
Page 12	:	Pre-check of the worst position

APPENDIX 2: Test Data

Page 13 - 15	:	Radiated Emission
13	:	Fundamental & Spurious emission (9 - 490kHz)
14	:	Fundamental & Spurious emission (9kHz - 30MHz)
15	:	Spurious emission (30 - 1000MHz)
Page 16	:	20dB Bandwidth and Occupied Bandwidth

APPENDIX 3: Test instruments

Page 17	:	Test instruments
---------	---	------------------

UL Apex Co., Ltd.

YAMAKITA EMC LAB.


907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

Radiated emission (9kHz-30MHz)

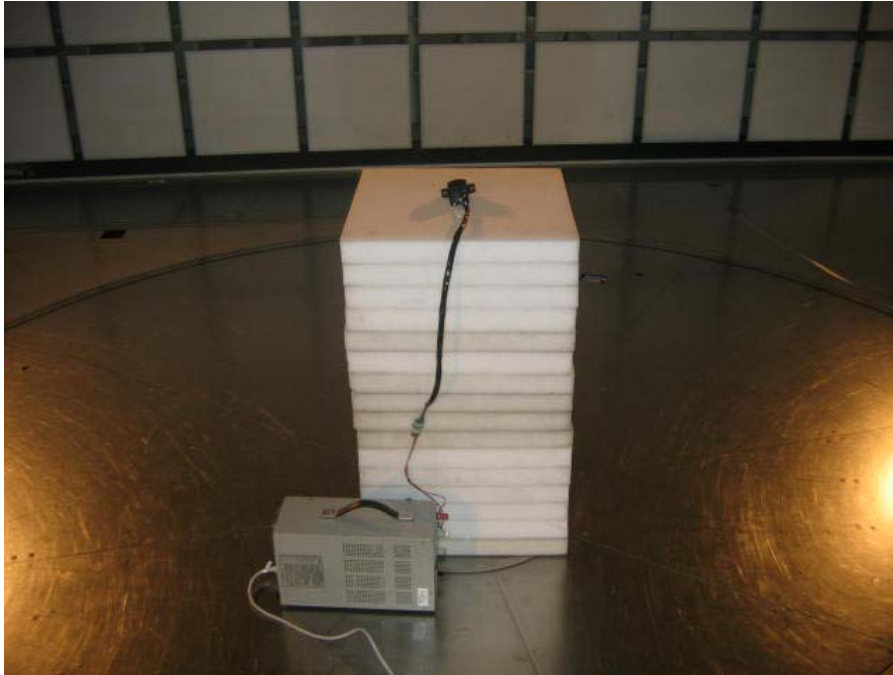

UL Apex Co., Ltd.

YAMAKITA EMC LAB.



907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

Radiated emission (30-1000MHz)

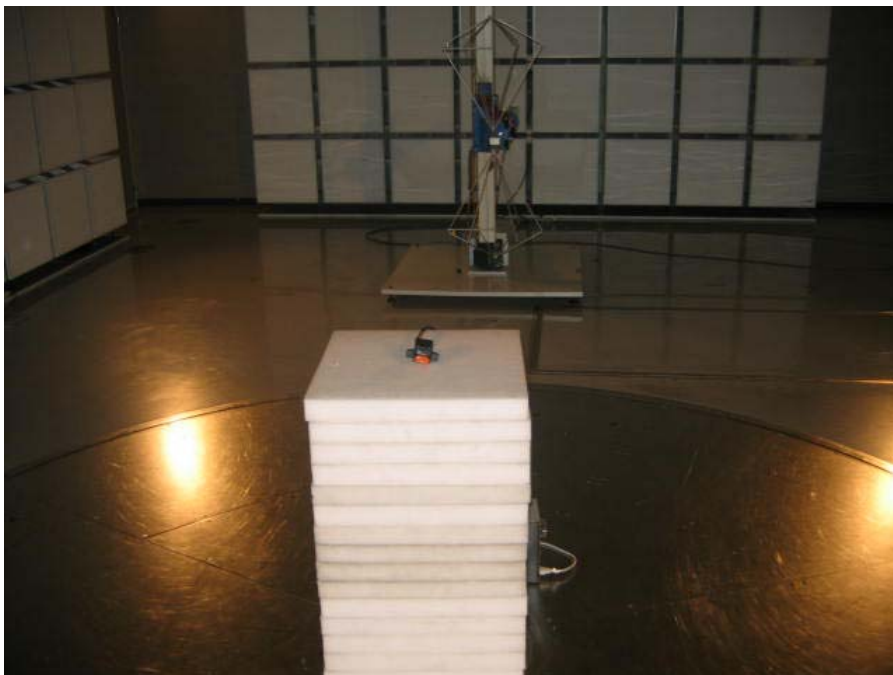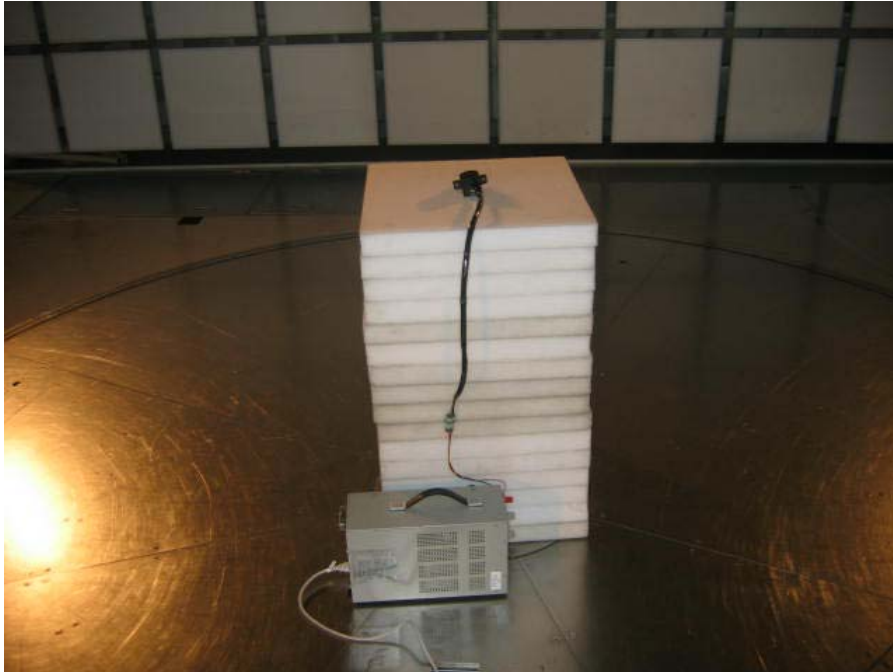

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN




Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

Pre-check of the worst position

Frequency	Below 30MHz	Above 30MHz
Antenna: Horizontal	X	X
Antenna: Vertical	X	Z

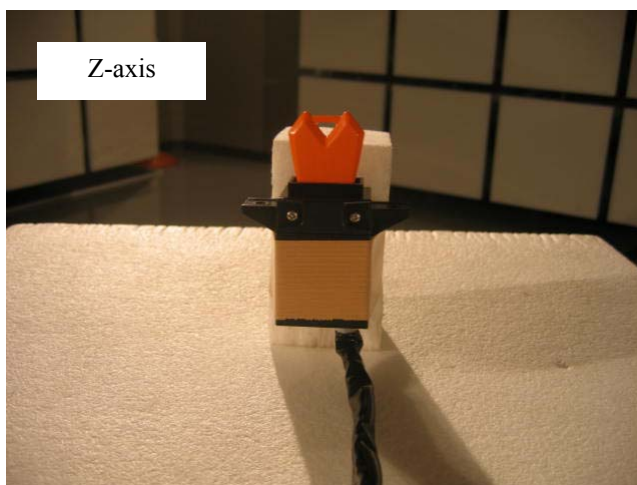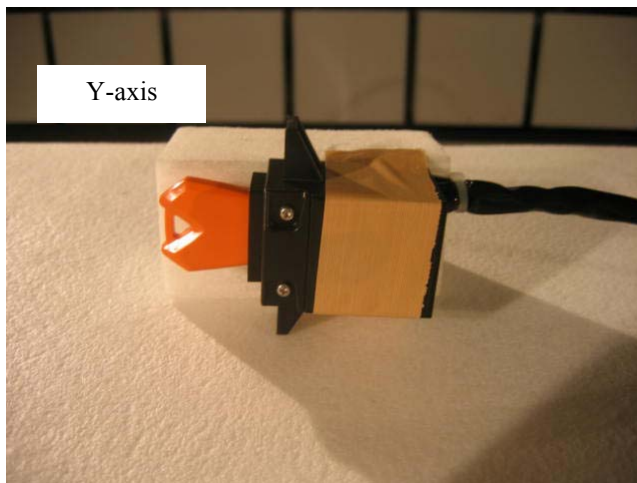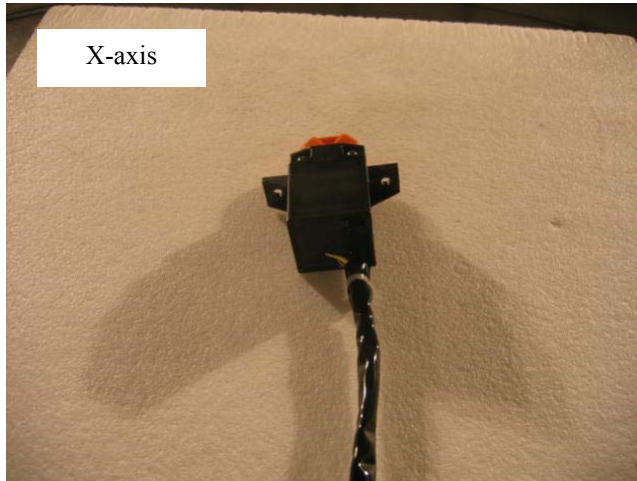

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (19.04.06)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26HE0324-YK-F

Applicant : ASAHIDENSO CO., LTD
Kind of Equipment : Immobilizer
Model No. : KZ42
Serial No. : 64051
Power : DC12V
Mode : Transmitting mode
Remarks : PK Detector
Date : 4/17/2006
Test Distance : 3 m
Temperature : 20 °C
Humidity : 53 %
Regulation : FCC Part15C § 15.209 9KHz-490kHz (3m) Pk

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	0.13	BB	69.2	65.3	19.4	22.9	0.1	5.2	71.0	67.1	125.3	54.3	58.2
2.	0.27	BB	37.7	27.3	19.4	27.1	0.1	6.0	36.1	25.7	119.0	82.9	93.3
3.	0.40	BB	39.0	38.3	19.4	27.3	0.1	6.0	37.2	36.5	115.6	78.4	79.1

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2) 0.15-30MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26HE0324-YK-F

Applicant : ASAHIDENSO CO., LTD
Kind of Equipment : Immobilizer
Model No. : KZ42
Serial No. : 64051
Power : DC12V
Mode : Transmitting mode
Remarks : 9-90kHz and 110kHz-490kHz: AV Detector
Date : 4/17/2006
Test Distance : 3 m
Temperature : 20 °C
Humidity : 53 %
Regulation : FCC Part15C § 15.209 9KHz-30MHz (3m)
Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	0.13	BB	69.1	65.2	19.4	22.9	0.1	5.2	70.9	67.0	105.3	34.4	38.3
2.	0.27	BB	25.8	14.9	19.4	27.1	0.1	6.0	24.2	13.3	99.0	74.8	85.7
3.	0.40	BB	32.1	29.5	19.4	27.3	0.1	6.0	30.3	27.7	95.6	65.3	67.9
4.	0.54	BB	28.7	28.9	19.4	27.5	0.1	6.0	26.7	26.9	73.0	46.3	46.1
5.	0.67	BB	28.8	28.5	19.4	27.6	0.2	6.0	26.8	26.5	71.1	44.3	44.6
6.	0.81	BB	27.9	28.1	19.4	27.7	0.2	6.0	25.8	26.0	69.4	43.6	43.4
7.	0.94	BB	30.1	29.0	19.4	27.7	0.2	6.0	28.0	26.9	68.1	40.1	41.2
8.	1.08	BB	27.5	27.5	19.4	27.8	0.2	6.0	25.3	25.3	66.9	41.6	41.6
9.	1.21	BB	28.7	28.4	19.4	27.8	0.2	6.0	26.5	26.2	65.9	39.4	39.7
10.	1.34	BB	27.6	28.5	19.4	27.7	0.2	6.0	25.5	26.4	65.1	39.6	38.7

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2) 0.15-30MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

Page:

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

YAMAKITA No.1 ANECHOIC CHAMBER

Report No. : 26HE0324-YK-F

Applicant : ASAHIDENSO CO., LTD
Kind of Equipment : Immobilizer
Model No. : KZ42
Serial No. : 64051
Power : DC12V
Mode : Transmitting mode
Remarks :
Date : 4/17/2006
Test Distance : 3 m
Temperature : 20 °C
Humidity : 53 %
Regulation : FCC Part15C § 15.209

Engineer : Toyokazu Imamura

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	54.04	BB	21.2	24.5	10.4	27.7	1.5	6.0	11.4	14.7	40.0	28.6	25.3
2.	134.45	BB	21.3	21.3	14.3	27.3	2.4	6.1	16.8	16.8	43.5	26.7	26.7
3.	320.00	BB	21.0	20.8	15.4	26.9	4.0	6.0	19.5	19.3	46.0	26.5	26.7

CALCULATION: READING + ANT. FACTOR + CABLE LOSS - AMP. GAIN + ATTEN.

■ ANTENNA: KLP-01 (HFH2-Z2) 0.15-30MHz

■ AMP: KAF-05 (8447D) ■ RECEIVER: KTR-01 (ES140) ■ KCC-30_31_32_34 (RE)

Bandwidth: ANSI C63.4 13.1.7

COMPANY : ASAHIDENSO CO., LTD
EQUIPMENT : Immobilizer
MODEL NUMBER: KZ42
SERIAL NUMBER: 64051
FCC ID : T8VKZ42
POWER : DC12V
Remarks : -

UL Apex Co.,Ltd. Yamakita No.1 Anechoic Chamber

REPORT NO : 26HE0324-YK-F

REGULATION :-


DATE : 2006/04/17

TEMP./HUMI : 20deg.C./53%


TEST MODE : Transmitting

ENGINEER : Toyokazu Imamura

20dB Bandwidth: 3.29kHz

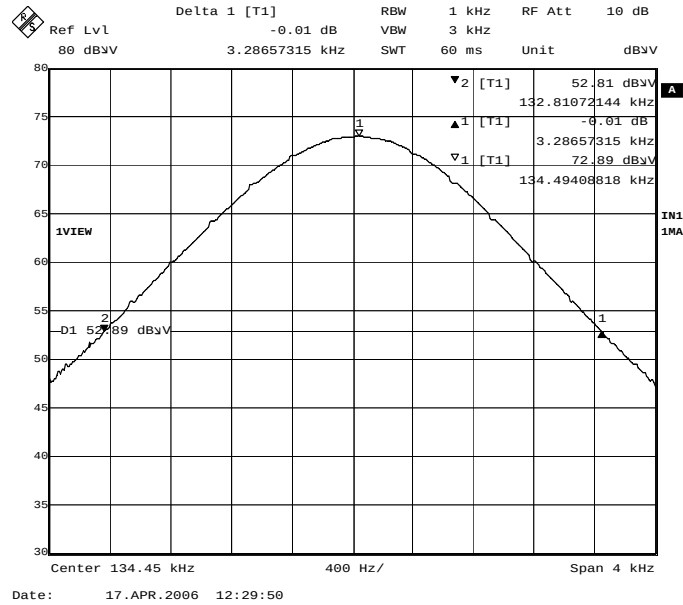

Occupied Bandwidth: 7.13kHz

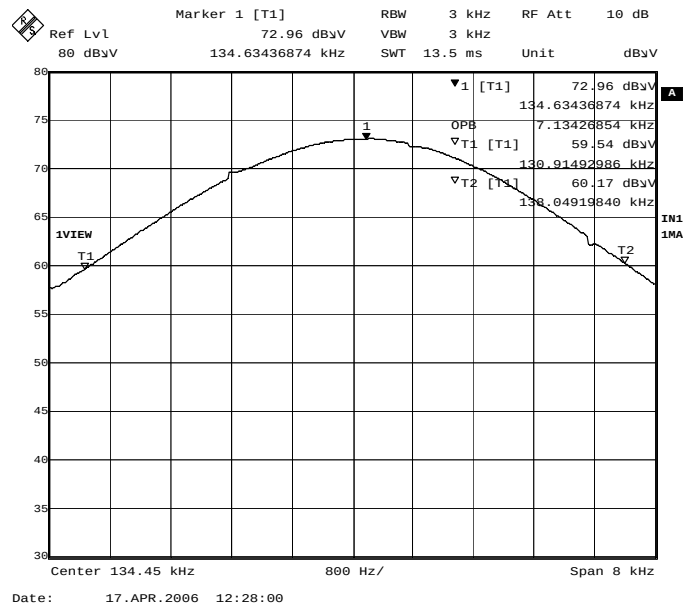

Test Report No :26HE0324-YK-F

APPENDIX 3 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
KAEC-01(NSA)	Anechoic Chamber	JSE	Semi 3m	RE/BW	2005/09/03 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE/BW	2006/04/21 * 12
KAT6-01	Attenuator	INMET	18N-6dB	RE/BW	2006/03/24 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2006/01/17 * 12
KCC-30/31/32 /34/KRM-03	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/RF M-E421	RE/BW	2005/12/22 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2006/01/17 * 12
KLP-01	Loop Antenna	Rohde & Schwarz	HFH2-Z2	RE/BW	2005/06/17 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE	2005/09/13 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE/BW	2005/08/05 * 12
YA-RE	Radiated emission(software)	UL-Apex	RE(Ver.1.5)	RE	
KOS-02	Digital Humidity Indicator	Custom	CTH-190	RE/BW	2004/07/22 * 24

All equipment is calibrated with traceable calibrations . Each calibration is traceable to the national or international standards .

Test Item :

RE: Radiated emission,

BW: Bandwidth