

FCC TEST REPORT

Under :

FCC 15 Subpart C, Paragraph 15.231

Prepared For :

SIT LA PRECISA S.p.A.

Viale dell' Industria 31,33
35129 Padova - Italy

FCC ID: T990584008

EUT: Proflame G-Fire

Model: 0584008

July 28, 2006

Report Type: Original Report

Test Engineer: Jacky Huang

Test Date: May 6, 2006


Review By: _____
Apollo Liu / Manager

TABLE OF CONTENTS

1. General Information.....	3
1. 1 Notes	3
1. 2 Testing Laboratory	3
1. 3 Details of Applicant	3
1. 4 Application Details.....	3
1. 5 Test Item.....	3
1. 6 Test Standards	3
2. Technical Test.....	4
2. 1 Summary of Test Results	4
3. EUT Modifications.....	4
4. Conducted Power Line Test.....	5
4. 1 Test Equipment	5
4. 2 Test Procedure	5
4. 3 Test Setup	5
4. 4 Configuration of The EUT.....	6
4. 5 EUT Operating Condition.....	6
4. 6 Conducted Power Line Emission Limits	7
4. 7 Conducted Power Line Test Result.....	7
5. Radiated Emission Test.....	8
5. 1 Test Equipment	8
5. 2 Test Procedure	8
5. 3 Radiated Test Setup.....	8
5. 4 Configuration of The EUT.....	9
5. 5 EUT Operating Condition.....	9
5. 6 Radiated Emission Limit	9
5. 7 Radiated Emission Test Result.....	10
6. Technical Characteristic	11
6. 1 Band Edge	11
6.1.1 Test Equipment	11
6.1.2 Test Procedure.....	11
6.1.3 Radiated Test Setup.....	11
6.1.4 Configuration of The EUT.....	11
6.1.5 EUT Operating Condition.....	11
6.1.6 Band Edge FCC 15.231 Limit.....	11
6.1.7 Band Edge Test Result.....	11
6. 2 Periodic Operation [FCC 47CFR 15.231e]	12
6. 3 Antenna Requirement.....	12
7. Photos of Testing.....	13
7. 1 EUT Test Photographs.....	13
7. 2 EUT Detailed Photographs	14
8. FCC ID Label	17
9. Test Equipment.....	18

1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

1.2 Testing Laboratory

Ke Mei Ou Laboratory Co., Ltd.

7A, Jiexiangge, JiahuiXincheng, No.3027, Shennan Rd., Futian, Shenzhen, Guangdong, P.R.China.

Tel: +86 755 83642690 Fax: +86 755 83297077

Email: kmo@kmlab.com

Internet: www.kmlab.com

Site on File with the Federal Communications Commission – United States

Registration Number: 125782

For 3 & 10 meter OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC4986

For 3 & 10 meter OATS

1.3 Details of Applicant

Name : SIT LA PRECISA S.p.A.
Address : Viale dell' Industria 31,33
35129 Padova – Italy
Contact : N/A
Tel : N/A
Fax : N/A

1.4 Application Details

Date of Receipt of Application : December 9, 2005
Date of Receipt of Test Item : December 19, 2005
Date of Test : December 19~April 30, 2006

1.5 Test Item

Manufacturer : Same Applicant
Brand Name : N/A
Model No. : 0584515 (Kit TX+RX), 0584008(TX), 0584202(RX)
Description : Proflame G-Fire

Additional Information

Frequency : 315MHz
Transmission Range : N/A
Number of Channels : 1
Antenna : The transmitter has a built in antenna and solder on the PCB
Power Supply : DC 4.5
Extreme Temp. Tolerance : N/A

1.6 Test Standards

FCC 15 Subpart C, Paragraph 15.231

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2. Technical Test

2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	PASS	Complies
FCC Part 15, Paragraph 15.207	Conducted Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.231(a) Limit	Periodic Operation Characteristics	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.231(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Subpart C Paragraph 15.231(b) Limit & Paragraph 15.209, Paragraph 15.205(b)	Radiated Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.231(c) Limit	Measured 20 dB Bandwidth	PASS	Complies

3. EUT Modifications

No modification by Ke Mei Ou Laboratory Co., Ltd.

4. Conducted Power Line Test


4.1 Test Equipment

Please refer to Section 9 this report.


4.2 Test Procedure

The EUT was tested according to ANSI C63.4 - 2003. For testing purpose the EUT was connected to PC computer through USB interface and operated using the customer software. The EUT was tested with typical modulation applied. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 uHenry as specified by section 5.1 of ANSI C63.4 - 2003. cables and peripherals were moved to find the maximum emission levels for each frequency.

4.3 Test Setup

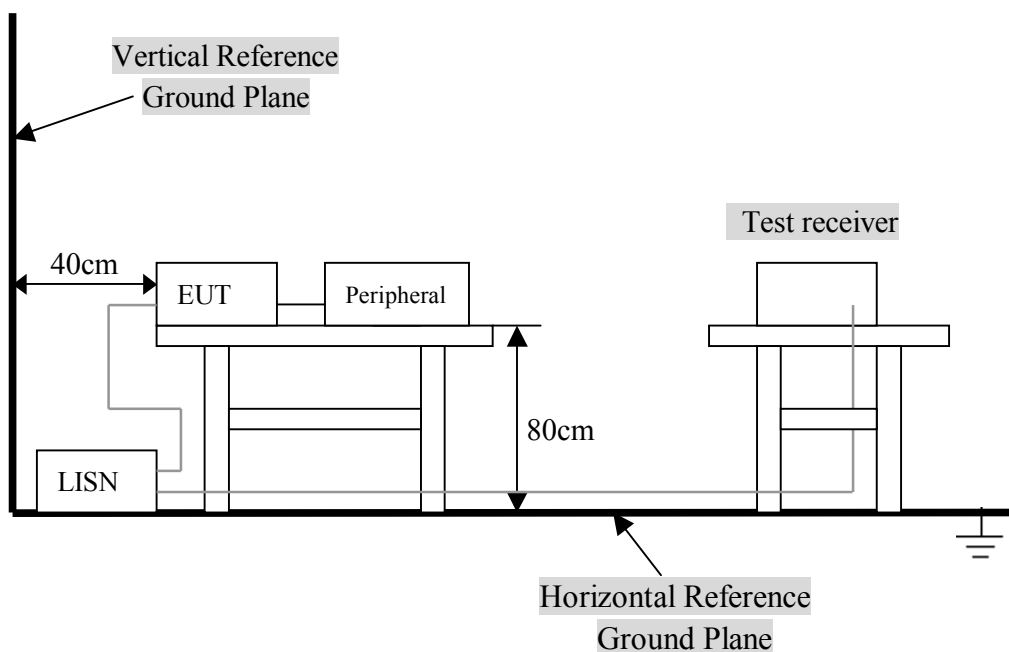

For the actual test configuration, Please refer to the related items – Photos of Testing.

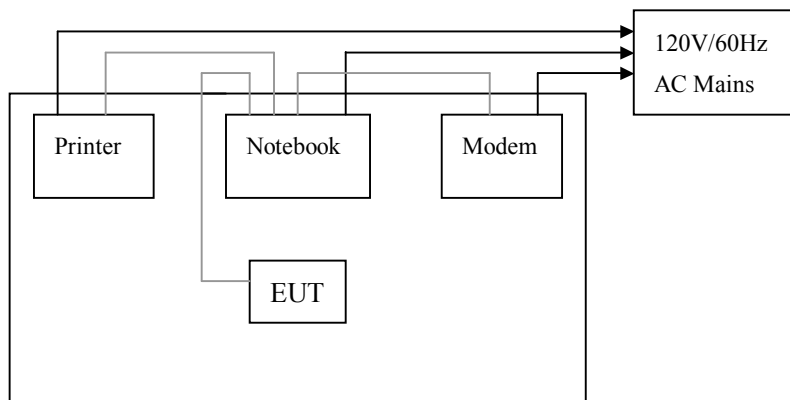

4. 4 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used 4.5V battery. Press any key of the EUT. Once the button releasing the transmission will be stopped within 2 seconds. The EUT transmitted continuously and the duty cycle of transmitting was set to worst case condition, which provided by manufacturer during all the tests. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model #	FCC ID
Proflame G-Fire	SIT LA PRECISA S.p.A.	0584008	T990584008

B. Internal Devices

DEVICE	MANUFACTURER	MODEL #	FCCID / DoC
N/A			


C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord

4. 5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- For testing purposes setup the EUT and simulators as shown on follow.
- The EUT was connected to PC computer through USB interface and operated using the customer software.
- Enable RF signal and confirm EUT active.
- Modulate output capacity of EUT up to specification.

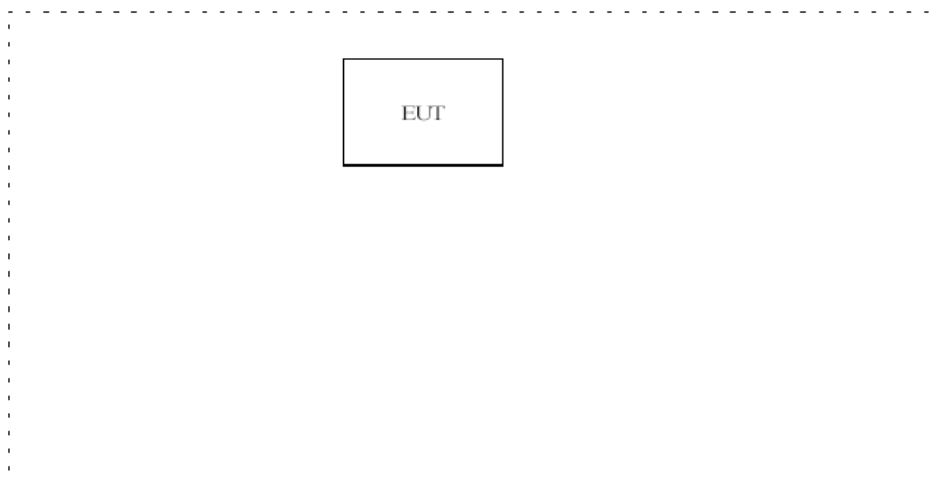

4. 6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
FREQUENCY RANGE (MHz)	CLASS A QP/AV	CLASS B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

NOTE : In the above table, the tighter limit applies at the band edges.

4. 7 Conducted Power Line Test Result

Owing to the DC operation of EUT, this test item is not performed.

5. Radiated Emission Test


5.1 Test Equipment

Please refer to Section 9 this report.

5.2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003. The radiated test was performed at Ke Mei Ou Laboratory. This site is on file with the FCC laboratory division, Registration No. 125782.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. The antenna polarization : Vertical polarization and Horizontal polarization.

5.3 Radiated Test Setup

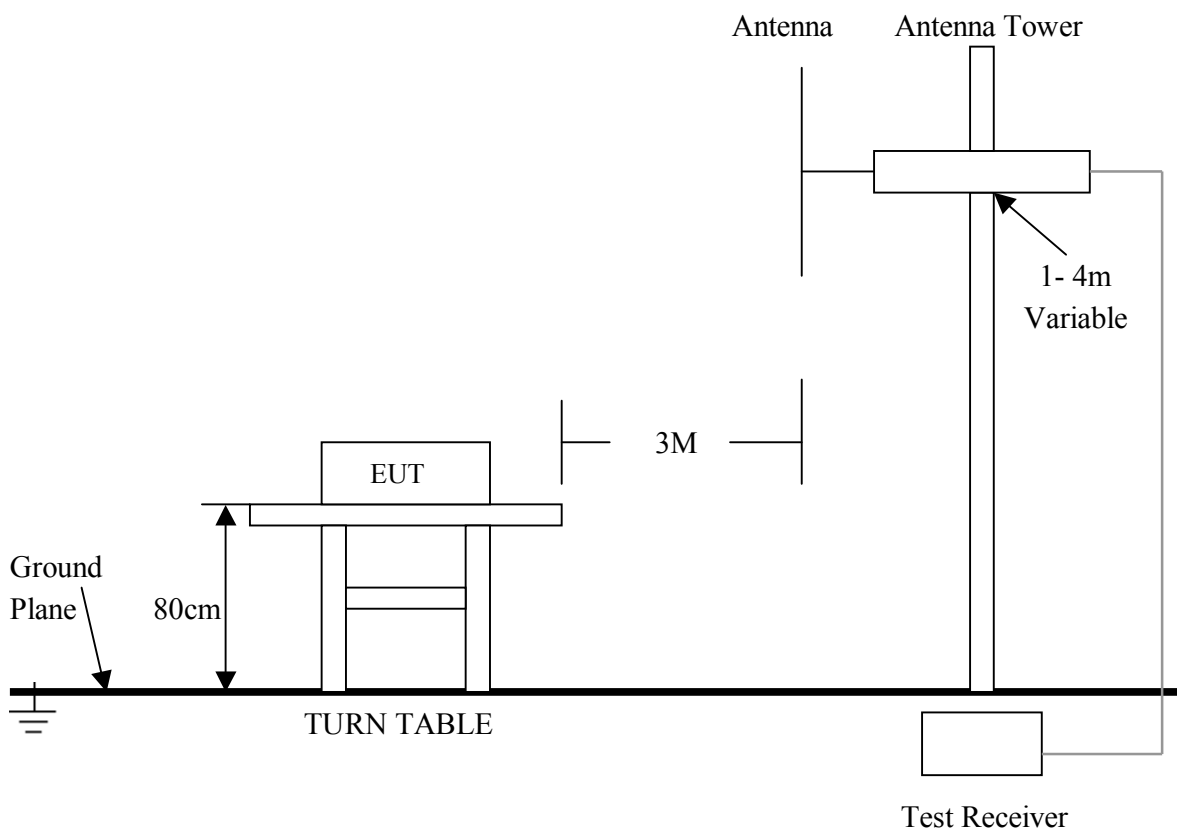

For the actual test configuration , please refer to the related items – Photos of Testing.

5.4 Configuration of The EUT

Same as section 4.4 of this report

5.5 EUT Operating Condition

Same as section 4.5 of this report.

5.6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

A. FCC Part 15 Subpart C Paragraph 15.231(b) Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)		Field Strength of Harmonics (3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
315.12	6041.68	75.6	604.2	55.6

- Note:**
- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

- Note:**
- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna and the

5. 7 Radiated Emission Test Result

A. Fundamental Radiated Emission Data

Product : Proflame G-Fire Test Mode : Normal
 Test Item : Fundamental Radiated Emission Data Temperature : 25 °C
 Test Voltage : DC 4.5V (Power by Battery) Humidity : 56%RH
 Test Result : **PASS**

Freq. (MHz)	Emission (dBuV/m)		HORIZ /VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average	Peak	Average
315.12	72.03	62.39	HORIZ	95.60	75.60	-23.59	-13.23
315.12	80.46	72.35	VERT	95.60	75.60	-15.16	-3.27

Note: (1) Emission Level = Reading Level + Probe Factor + Cable Loss.
 (2) The average measurement was not performed when the peak measured data under the limit of average detection.

B. General Radiated Emission Data & Harmonics Radiated Emission Data

Product : Wireless USB Test Mode : USB Mode & TTL Mode
 Test Item : General Radiated Emission Data & Harmonics Radiated Emission Data Temperature : 25 °C
 Test Voltage : DC 4.5V (Power by Battery) Humidity : 56%RH
 Test Result : **PASS**

General Radiated Emission

Freq. (MHz)	Emission Peak (dBuV/m)	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
32.960	35.81	HORIZ	40.0	-4.19
35.960	34.13	VERT	40.0	-5.87
113.160	27.34	HORIZ	43.5	-16.16
127.320	27.92	VERT	43.5	-15.58

Note: (1) Emission Level = Reading Level + Probe Factor + Cable Loss.
 (2) The average measurement was not performed when the peak measured data under the limit of average detection.

Harmonics Radiated Emission

Freq. (MHz)	Emission (dBuV/m)		HORIZ /VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average	Peak	Average
630.24	65.43	52.13	HORIZ	75.6	55.6	-10.19	-3.49
630.24	67.40	52.67	VERT	75.6	55.6	-8.22	-2.95
945.40	60.98	50.21	HORIZ	75.6	55.6	-14.64	-5.41
945.40	57.49	46.51	VERT	75.6	55.6	-18.13	-9.11

Note: (1) Emission Level = Reading Level + Probe Factor + Cable Loss.
 (2) The average measurement was not performed when the peak measured data under the limit of average detection.

6. Technical Characteristic

6.1 Band Edge

6.1.1 Test Equipment

Please refer to Section 9 this report.

6.1.2 Test Procedure

Please refer to Section 5.2 this report.

6.1.3 Radiated Test Setup

Please refer to Section 5.3 this report.

6.1.4 Configuration of The EUT

Same as section 4.4 of this report

6.1.5 EUT Operating Condition


Same as section 4.5 of this report.

6.1.6 Band Edge FCC 15.231 Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.
 $B.W(20dBc) Limit = 0.25\% \times f (MHz) = 0.25\% \times 315.12MHz = 0.7878MHz$
From the plot, the bandwidth is observed to be 0.282MHz, at 20dBc where the bandwidth limit is 0.7878MHz.

6.1.7 Band Edge Test Result

Product	: Proflame G-Fire	Test Mode	: Normal
Test Item	: Band Edge Data	Temperature	: 25 °C
Test Voltage	: DC 4.5V (Power by Battery)	Humidity	: 56%RH
Test Result	: PASS		

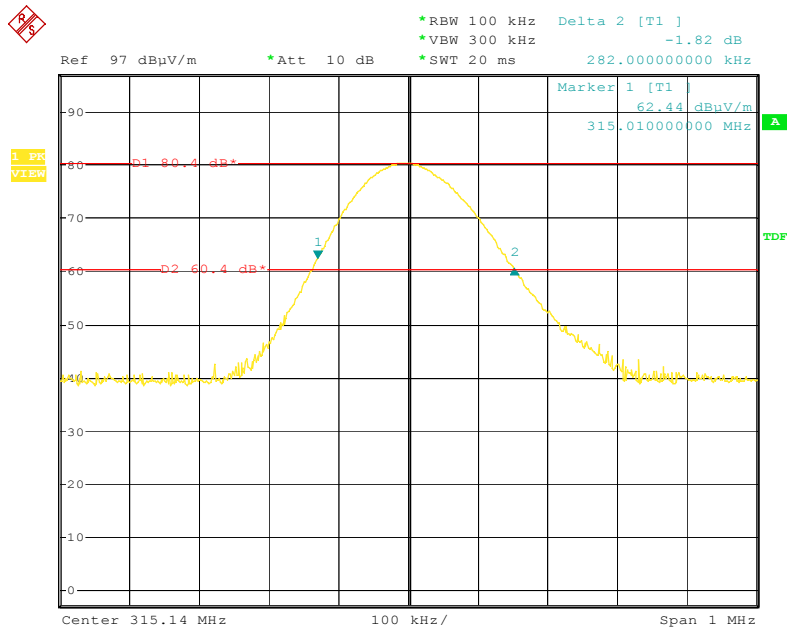

Date: 18.MAY.2006 04:38:20


- Note:**
- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
 - (2) The average measurement was not performed when the peak measured data under the limit of average detection.

6. 2 Periodic Operation [FCC 47CFR 15.231]

15.231(a) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Results:

Tranmitter Turn-Off Relaease Time, Upon Momentary Activation of Push Switch
(Showing release time less than 2 seconds)

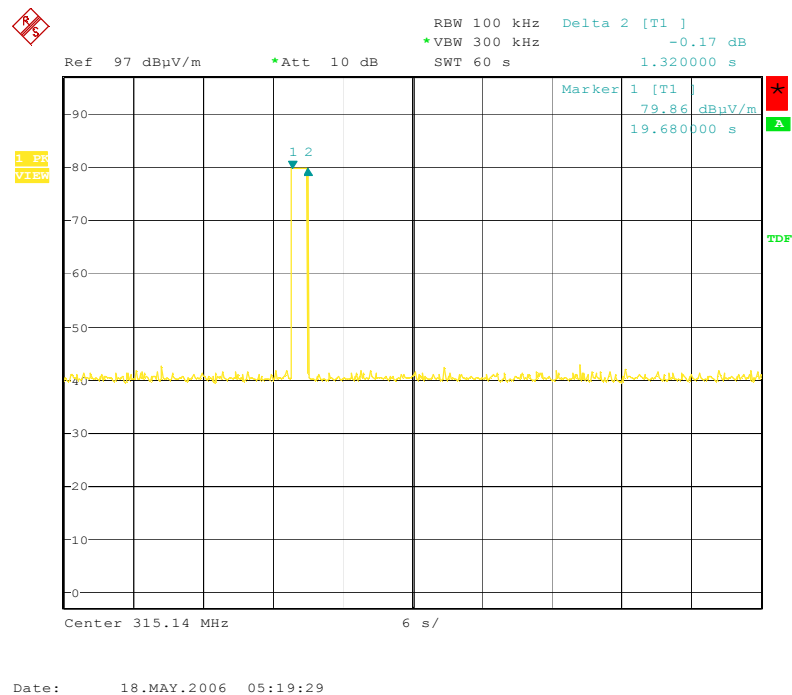

6. 3 Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT's antenna is a trace on the PCB. The EUT meets the requirements of this section.

7. Photos of Testing

7.1 EUT Test Photographs

Radiated emission test view



7.2 EUT Detailed Photographs

EUT top view




EUT bottom view




EUT inside whole view



Main board component side

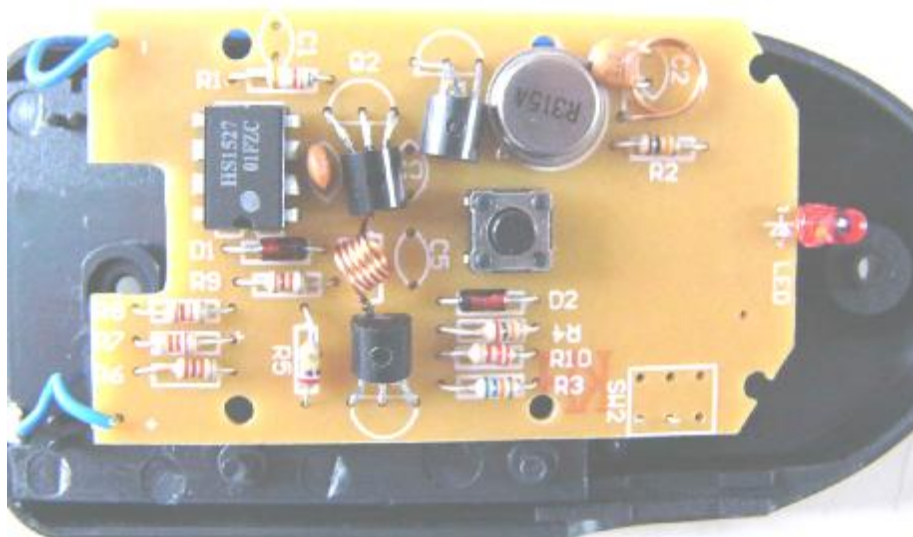

Main board solder side

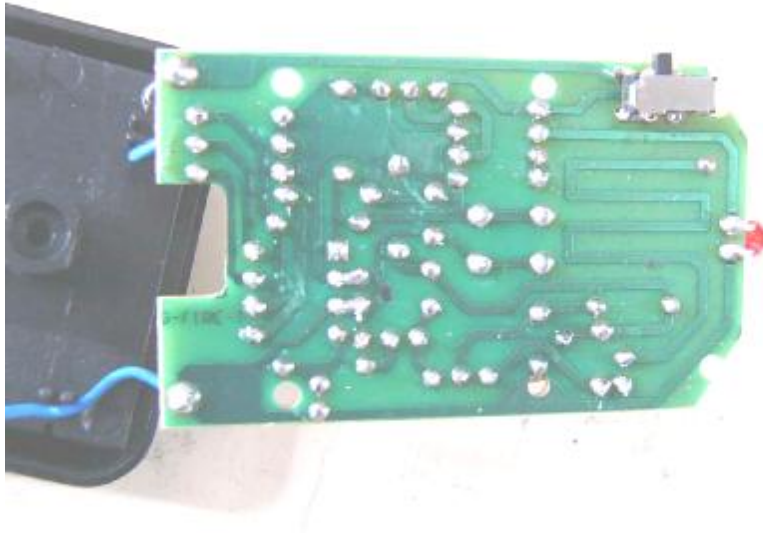

8. FCC ID Label

FCC ID: T990584008

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location



9. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Date of Cal.	Due Date
Turntable	KMO	KSZ001T	200306	NCR	NCR
Antenna Tower	KMO	KSZ002AT	200307	NCR	NCR
OATS	KMO	KSZSITE001	N/A	July 06, 2006	July 06, 2007
EMI Test Receiver	Rohde & Schwarz	ESPI3	100180	Oct.18, 2005	Oct.18, 2006
Signal Generator	Rohde & Schwarz	SMT03	100059	Feb.10, 2006	Feb.10, 2007
Signal Generator	FLUKE	PM5418+Y/C	LO747012	Feb.10, 2006	Feb.10, 2007
Signal Generator	FLUKE	PM5418TX	LO738007	Feb.10, 2006	Feb.10, 2007
Loop Antenna	SCHWARZBECK	FMZB1516	113	Jan. 30, 2006	Jan. 30, 2007
Loop Antenna	Rohde & Schwarz	HFH2-Z2	872096/16	Jan. 30, 2006	Jan. 30, 2007
Bilog Antenna	Chase	CBL6111C	2576	Feb.01, 2006	Feb.01, 2007
Ultra Broadband Antenna	Rohde & Schwarz	HL 562	100110	June.05, 2006	June.05, 2007
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct. 23,2005	Oct. 23, 2006
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct. 23,2005	Oct. 23, 2006
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Absorbing Clamp	Rohde & Schwarz	MDS-21	N/A	Oct. 29,2005	Oct. 29,2006
KMO Shielded Room	KMO	KMO-001	N/A	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb. 27, 2006	Feb.27, 2007
AMN	Rohde & Schwarz	ESH3-Z5	100002	Feb.10, 2006	Feb.10, 2007
LISN	Kyoritsu	KNW-407	8-1441-8	Feb.10, 2006	Feb.10, 2007
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	Feb.10, 2006	Feb.10, 2007
Bilog Antenna	Chase	CBL6112B	2591	Feb.10, 2006	Feb.10, 2007
Horn Antenna	Rohde & Schwarz	HF906	100014	Feb.10, 2006	Feb.10, 2007
Power Meter	Rohde & Schwarz	NRVD	100041	Feb.10, 2006	Feb.10, 2007
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb.10, 2006	Feb.10, 2007
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb.10, 2006	Feb.10, 2007
SOHO Telephone Switching System	IKE	2000-108C	N/A	Feb.10, 2006	Feb.10, 2007
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2006	Feb.10, 2007
3m Semi-Anechoic Chamber	Albatross Projects	9mX6mX6m	N/A	Feb.10, 2006	Feb.10, 2007