



ETS Dr.GenZ Taiwan PS Co., LTD

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679

A2LA Cert.No.: 2300.01

PCTRB Accredited Type Certification Test House

FCC TEST - REPORT

FCC RULES PART 15 / SUBPART C

FCC ID: T9JRN41

Test report no.: W6M20609-7424-P-15

ETS DR.GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU, TAIPEI 114, TAIWAN, R.O.C.
PHONE 886-2-66068877 FAX 886-2-66068879

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Notes	3
1.2	Testing laboratory	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	Details of approval holder.....	4
1.4	Application details	5
1.5	General information of Test item.....	5
1.6	Test standards.....	6
2	TECHNICAL TEST	7
2.1	Summary of test results.....	7
2.2	Test environment.....	7
2.3	Test Equipment List.....	8
3	TEST RESULTS (ENCLOSURE)	12
3.1	Peak Output Power (transmitter).....	13
3.2	Equivalent isotropic radiated power	15
3.2.1	Transmitter.....	15
3.3	RF Exposure Compliance Requirements	15
3.4	Out of Band Radiated Emissions	15
3.5	Transmitter Radiated Emissions in restricted Bands	16
3.6	Spurious emissions (tx).....	17
3.7	Carrier Frequency Separation	20
3.8	Number of Hopping Frequencies.....	21
3.8.1	Pseudorandom Frequency Hopping Sequence	21
3.8.2	Coordination of hopping sequences to other transmitters.....	21
3.8.3	System Receiver Hopping Capability.....	21
3.9	Time of Occupancy (Dwell Time).....	22
3.10	20dB Bandwidth	23
3.10.1	System Receiver Input Bandwidth.....	24
3.11	Band-edge Compliance of RF Emissions	24
3.12	Radiated Emissions from Receiver Section of Transceiver.....	26
3.13	Power Line Conducted Emission.....	28
	APPENDIX.....	30
	Appendix A.....	31
	Appendix B.....	32
	Appendix C.....	33
	Appendix D.....	34
	Appendix E.....	35
	Appendix F.....	36
	Appendix G.....	37
	Appendix H.....	38
	Appendix I.....	39
	Appendix J.....	40

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

Tester:

Nov 02, 2006

Jay Chaing

Date

ETS-Lab.

Name

Signature

Technical responsibility for area of testing:

Nov 02, 2006

Steven Chuang

Date

ETS

Name

Signature

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company

ETS DR. GENZ TAIWAN PS CO., LTD.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA-registration number: 2300.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679

PCTRB Accredited Type Certification Test House

1.3 Details of approval holder

Name	: Roving Networks, Inc.
Street	: 431 monterey avenue, suite 5 los gatos,
Town	: CA 95030
Country	: United States
Telephone	: 408-395-6539
Fax	: ./.

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

1.4 Application details

Date of receipt of application : Sep 19, 2006
Date of receipt of test item : Oct 25, 2006
Date of test : from Oct 25, 2006 to Oct 31, 2006

1.5 General information of Test item

Type of test item : Bluetooth Device
Model Number : T9JRN41
Hardware : V2.0
Software : V2.0
Serial number : without
Photos : see Annex

Technical data

Frequency band : 2.400 GHz – 2.4835 GHz
Frequency (ch A) : 2.402 GHz
Frequency (ch B) : 2.441 GHz
Frequency (ch C) : 2.480 GHz

Transmitter Unom

Normal Mode

Power (ch A or ch 0) : **Conducted: -2.07 dBm**
Power (ch B or ch 39) : **Conducted: -1.65 dBm**
Power (ch C or ch 78) : **Conducted: -1.63 dBm**

EDR Mode

Power (ch A or ch 0) : **Conducted: -0.39 dBm**
Power (ch B or ch 39) : **Conducted: 0.03 dBm**
Power (ch C or ch 78) : **Conducted: 0.04 dBm**

Input : 100-240 VAC, 50-60Hz

Power supply

Output : 5 VDC, 1.0A

Operation modes : duplex

Modulation Type : GFSK

Antenna Type : Chip antenna

Antenna gain : -2.83 dBi

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Host device : none

Classification :

Fixed Device	☒
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☐

Manufacturer:
(if applicable)

Name : ./.
Street : ./.
Town : ./.
Country : ./.

Additional information : The test sample is designed as T9JRN41 device. Its pseudorandom hopping scheme, authentication, receiver parameters, synchronization procedure and other parameters are determined by T9JRN41 Specification.

1.6 Test standards

Technical standard : FCC RULES PART 15 / Subpart B/ SUBPART C § 15.247 : February 2006

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature	:	23 °C
Relative humidity content	:	20 ... 75 %
Air pressure	:	86 ... 103 kPa
Details of power supply	Input	: 100-240 VAC, 50-60Hz
	Output	: 5 VDC, 1.0A
Extreme conditions parameters	:	test voltage : -- extreme min :-- V max :-- V

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2006/10/16	2007/10/15
ETSTW-CE 002	PREREGULATOR MODE DC POWER SUPPLY	None	None		Function Test	
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2006/10/16	2007/10/15
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2006/10/16	2007/10/15
ETSTW-CE 006	IMPULS-BEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	In House Certificate	
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	ABSORPTIONS-MESSWANDLER-ZANGE	2005/10/24	2007/10/23
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2006/8/17	2007/8/16
ETSTW-CE 012	Dual-Phase-V-Network	NNB-2/16Z	03/10201	Telemeter	2006/6/13	2007/6/12
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2005/10/14	2007/10/13
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2006/10/20	2007/10/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2006/10/30	2007/10/29
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2006/10/12	2007/10/11
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	Function Test	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	ANTENNA	HL025	352886/001	R&S	2006/5/4	2008/5/3
ETSTW-RE 018	ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2006/10/11	2007/10/10
ETSTW-RE 027	Passive Loop Antenna	6512	34563	EMCO	2004/6/30	2007/6/29
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2006/5/26	2008/5/25
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/5/26	2008/5/25
ETSTW-RE 030	Double-Ridged Waveguide Horn Antenna	3117	35224	EMCO	2006/5/3	2008/5/2
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2006/10/11	2007/10/10
ETSTW-RE 033	4CH 1GHz 5GS/s DSO	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2006/7/27	2007/7/26
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2006/10/11	2007/10/10
ETSTW-RE 042	ANTENNA	HK116	100172	R&S	2005/1/14	2007/1/13
ETSTW-RE 043	ANTENNA	HL223	100166	R&S	2006/5/8	2008/5/7
ETSTW-RE 044	ANTENNA	HL050	100094	R&S	2006/5/29	2008/5/28
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2005/5/19	2007/5/18
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2006/7/28	2007/7/27
ETSTW-EMS 002	Frequency Converter	YF-6020	308014	T-Power	Function Test	
ETSTW-EMS 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2005/12/8	2008/12/8
ETSTW-EMS 014	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T2-02	20241	FCC	2005/12/7	2007/12/7
ETSTW-GSM 01	SIM Simulator	IT3	B2004-50106	ORGA	2006/7/26	2007/7/25
ETSTW-GSM 02	Universal Radio Communication Tester	CMU 200	103489	R&S	2005/11/15	2006/11/14
ETSTW-GSM 03	Agilent 8960 Test Set 1	E5515C	GB44052675	Agilent	2006/6/26	2008/6/25
ETSTW-GSM 04	Agilent 8960 Test Set 2	E5515C	GB44052665	Agilent	2006/7/13	2008/7/12
ETSTW-GSM 05	Agilent 8960 Test Set 3	E5515C	GB44052652	Agilent	2006/7/16	2008/7/15
ETSTW-GSM 06	Agilent 8960 Test Set 4	E5515C	GB44052684	Agilent	2006/7/4	2008/4/3
ETSTW-GSM 07	Agilent 8960 Test Set 5	E5515C	GB44052658	Agilent	2006/7/12	2008/7/11
ETSTW-GSM 08	Agilent 8960 Test Set 6	E5515C	GB44052666	Agilent	2006/7/6	2008/7/5
ETSTW-GSM 09	Controller PC	Dell GX 270	700F61J	Dell	Function Test	
ETSTW-GSM 10	Combiner Wessex / Anite	B4605/100	0053	Wessex / Anite	2006/7/13	2008/7/12
ETSTW-GSM 11	GSM 850,900,1800,1900 Test system	TS8950G	101087	R&S	2005/11/1	2007/4/30
ETSTW-GSM 12	Acoustical Calibrator	4231	2463874	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 13	Conditioning Amplifier	2690	2437856	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 15	Mouth Simulator	4227	2462516	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 16	TEMP.&HUMIDITY CHAMBER	GTH-120-40-1P-U	MAA0501002	GIANT FORCE	2005/12/29	2006/12/28
ETSTW-GSM 18	AUDIO ANALYZER	UPL16	100173	R&S	2006/10/28	2007/10/27
ETSTW-GSM 23	SPLITTER	4901.19.A	None	SUHNER	Function Test	
ETSTW-GSM 24	Vibration Testing System	VS-100V	5494	Vibration	2005/12/20	2006/12/19
ETSTW-GSM 29	Microphone	4192	2458739	Brüel&Kjær	2006/7/26	2007/7/25
ETSTW-GSM 30	Ear Simulator	4195	2457416	Brüel&Kjær	2006/7/26	2007/7/25

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by ETS Dr. Genz Taiwan PS Co., Ltd. at the registered open field test site located No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.). The Registration Number: 930600.

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANTENNA & GROUND:

This unit uses Chip antenna.

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	☒	☒	☐
Equivalent radiated Power	15.247(b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(c)	☒	☒	☐
Spurious Emissions conducted – Transmitter operating	15.247	☐	☐	☐
Carrier Frequency Separation	15.247(a) (1)	☒	☒	☐
Number of Hopping Frequencies	15.247(a) (1)(i)	☒	☒	☐
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	☒	☒	☐
20 dB Bandwidth	15.247(a) (1)(i)	☒	☒	☐
Band-edge Compliance of RF Emission	15.247(c)	☒	☒	☐
Radiated Emission from Digital Part And Receiver L.O.	15.109	☒	☒	☐
Power Line Conducted Emission	15.207(a)	☒	☒	☐

The follows is intended to leave blank.

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

(Normal Mode)

Test conditions		Conducted Power		
		Channel A [dBm]	Channel B [dBm]	Channel C [dBm]
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	-2.07	-1.65	-1.63
Measurement uncertainty		< 3 dB		

(EDR Mode)

Test conditions		Conducted Power		
		Channel A [dBm]	Channel B [dBm]	Channel C [dBm]
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	-0.39	0.03	0.04
Measurement uncertainty		< 3 dB		

Test conditions		Radiated Power		
		Channel A [dBm]	Channel B [dBm]	Channel C [dBm]
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	--	--	--
Measurement uncertainty		< 3 dB		

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Test conditions $T_{nom}=23^{\circ}\text{C}$, $V_{nom}=120\text{ V}$ Frequency[MHz]	Signal Field strength TX highest power mode dB μ V/m
2402	97.83
Measurement uncertainty	< 3 dB

The diagrams for the field strength measurements are included in Appendix.

Maximum Peak Output Power

Limits:

Frequency MHz	Number of hopping channels			
	≥ 75	≥ 50	$49 \geq 25$	$74 \geq 15$
902-928		30 dBm	24 dBm	
2400-2483.5 MHz	30 dBm	-		21 dbm
5725-5850 MHz	30 dBm	-		

In case of employing transmitter antennas having antenna gain >dBi and using fixed poin-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.2 Equivalent isotropic radiated power

FCC Rule: 15.239(b), 15.35

Because using an internal antenna there are no deviations from the radiated test results according 3.1.

3.2.1 Transmitter

Integral Antenna:

At the transmitter the measurement was transacted with the modulation declared by the manufacturer and the maximum available output power of the EUT.

In this arrangement the EUT fulfils the requirements of the FCC rules § 15.247, subpart C, section b. This unit uses an internal antenna. There is no provision for an external antenna (see photo).

3.3 RF Exposure Compliance Requirements

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

The antenna used for this Bluetooth transceiver module must not be co-located or operating in conjunction with any other antenna or transmitter.

3.4 Out of Band Radiated Emissions

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

$97.83 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 77.83 \text{ dB}\mu\text{V/m}$

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

$77.83 \text{ dB}\mu\text{V/m}$

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

$97.83 \text{ dB}\mu\text{V/m} - 20 \text{ dB} = 77.83 \text{ dB}\mu\text{V/m}$

Remarks: See attached diagrams.

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.5 Transmitter Radiated Emissions in restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dB μ V/m

For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB μ V/m + 20 dB= 74 dB μ V/m

Remarks: See attached diagrams.

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 015, ETSTW-RE 016,
ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.6 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

Summary table with radiated data of the test plots

Low Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1602.0035	60.8	-6.99	PK	53.81	74	20.19	155	298
	1602.0035	55.63	-6.99	AV	48.64	54	5.36	155	298
	2370.0161	56.18	2.08	PK	58.26	74	15.74	185	324
	2370.0161	44.76	2.08	AV	46.84	54	7.16	185	324
	2337.8462	53.91	2.10	PK	56.01	74	17.99	190	342
	2337.8462	42.17	2.10	AV	44.27	54	9.73	190	342
	2241.1025	54.01	-0.6	PK	53.41	74	20.59	175	302
	2241.1025	43.86	-0.6	AV	43.26	54	10.74	175	302
	4803.9903	59.22	4.44	PK	63.66	74	10.34	140	317
	4803.9903	46.78	4.44	AV	51.22	54	2.78	140	317

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	2369.8878	54.30	2.08	PK	56.38	74	17.62	190	321
	2369.8878	43.02	2.08	AV	45.10	54	8.90	190	321
	2337.9481	50.40	2.10	PK	52.5	74	21.50	185	338
	2337.9481	38.39	2.10	AV	40.49	54	13.51	185	338
	4803.9262	52.96	4.44	PK	57.40	74	16.60	135	312
	4803.9262	45.44	4.44	AV	49.88	54	4.12	135	312

Middle Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1627.9487	61.53	-6.92	PK	54.61	77.83	23.22	180	287
	2248.8782	53.83	-0.31	AV	53.52	74	20.48	145	311
	2248.8782	43.68	-0.31	PK	43.37	54	10.63	145	311
	2344.8716	52.64	2.09	AV	54.73	74	19.27	160	302
	2344.8716	40.45	2.09	PK	42.54	54	11.46	160	302
	2312.8846	50.5	2.11	AV	52.61	74	21.39	190	289
	2312.8846	39.42	2.11	PK	41.53	54	12.47	190	289
	4881.9615	52.84	4.89	AV	57.73	74	16.27	170	333
	4881.9615	43.54	4.89	PK	48.43	54	5.57	170	333

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	2345.7606	49.65	2.09	PK	51.74	54	2.26	155	305
	4881.8141	51.4	4.88	PK	56.28	74	17.72	165	331
	4881.8141	40.67	4.88	AV	45.55	54	8.45	165	331

High Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1655.7628	60.99	-6.72	PK	54.27	77.83	23.56	125	272
	2348.0064	50.81	2.08	PK	52.89	74	21.11	170	309
	2348.0064	38.1	2.08	AV	40.18	54	13.82	170	309
	4959.8493	48.53	4.63	PK	53.16	74	20.84	185	296
	4959.8493	38.9	4.63	AV	43.53	54	10.47	180	296

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	1654.7352	57.2	-6.74	PK	50.46	77.83	27.37	130	281
	2262.4273	46.23	0.93	AV	47.16	54	6.84	150	284
	2352.8129	48.25	2.1	PK	50.35	54	3.65	145	301
	4959.9198	50.01	4.62	AV	54.63	74	19.37	190	293
	4959.9198	40.16	4.62	PK	44.78	54	9.22	190	293

- Note**
1. **Correction Factor = Antenna factor + Cable loss - Preamplifier**
 2. **The formula of measured value as: Test Result = Corrected Reading + Correction Factor**
 3. **Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average**

All other not noted test plots do not contain significant test results in relation to the limits.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Comment: see attached diagrams

Test equipment used: ETSTW-RE 003, ETSTW-RE 012, ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-RE 024

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.7 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

Test conditions		Channel Separation	
		Channel B	Channel B+1
T _{nom} = 23°C	V _{nom} = 120 V	999.999999998 KHz	
Measurement uncertainty		< 10 Hz	

Limits:

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-CE 003, ETSTW-RE 003

Comment: see attached diagram

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.8 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

Test conditions		Operating Mode	Number of Channels
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	normal transmitting	79
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120\text{ V}$	Inquiry mode	32

Limits:

Frequency Range MHz	Limit			
	20dB Bandwidth		20dB Bandwidth < 250 kHz	20dB Bandwidth ≥ 250 kHz
	≤ 1MHz			
902-928 MHz			≥ 50	≥ 25
2400-2483.5	≥ 15	≥ 15		
5725-5850.0 MHz	≥ 75			

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: see attached diagrams

3.8.1 Pseudorandom Frequency Hopping Sequence

The generation of the hopping sequence is determined by the Bluetooth cord specification and complies with the FCC requirements.

3.8.2 Coordination of hopping sequences to other transmitters

According to the Bluetooth core specification V1.1 such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

3.8.3 System Receiver Hopping Capability

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.9 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483,5 MHz band the average time of occupancy on any channel shall not be greater than 0,4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Test conditions	Operating mode	Measurement periode	Time of Occupancy
$T_{nom} = 23^{\circ}\text{C}$ $V_{nom} = 120\text{ V}$ Channel B	normal transmitting		119.583 ms
	inquiry mode		--
Measurement uncertainty	< 1 μs		

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Periode	Limit
902 – 928	≥ 50	20 s	0,4 s
	$49 \geq 25$	10 s	0,4 s
2400 – 2483,5	≥ 15	0,4 s * number of used channels	0,4 s
5725- 5850	≥ 75	30 s	0,4s

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: See attached diagram, which show the On-time and the number of counted events during the measurement period

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.10 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

(Normal Mode)

Test conditions		20 dB Bandwidth		
		Channel A	Channel B	Channel C
$T_{\text{nom}} = 23^{\circ}\text{C}$	$V_{\text{nom}} = 120 \text{ V}$	993.589743589 kHz	993.589743589 kHz	993.589743589 kHz
Measurement uncertainty		< 10 Hz		

(EDR Mode)

Test conditions		20 dB Bandwidth		
		Channel A	Channel B	Channel C
$T_{\text{nom}} = 23^{\circ}\text{C}$	$V_{\text{nom}} = 120 \text{ V}$	1.365384615 MHz	1.365384615 MHz	1.371794872 MHz
Measurement uncertainty		< 10 Hz		

Limits:

Frequency Range / MHz	Number of channels	Limit
902-928	< 50	< 250 kHz
	$49 \geq 25$	$500 \text{ kHz} \geq 250 \text{ kHz}$
2400-2483.5	≥ 15	not determined
5725-5850	75	$\leq 1 \text{ MHz}$

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: see attached diagram

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.10.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.

3.11 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

(Normal Mode)

Test conditions		Attenuation at or outside band-edges Single Frequency	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	65.56 dB	68.59 dB
Measurement uncertainty		< 100 Hz	

Test conditions		Attenuation at or outside band-edges Hopping Frequency	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	58.26 dB	62.43 dB
Measurement uncertainty		< 100 Hz	

(EDR Mode)

Test conditions		Attenuation at or outside band-edges Single Frequency	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	-- dB	-- dB
Measurement uncertainty		< 100 Hz	

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Test conditions		Attenuation at or outside band-edges Hopping Frequency	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 120 \text{ V}$	54.83 dB	58.77 dB
Measurement uncertainty		< 100 Hz	

Limits:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-CE 003 , ETSTW-RE 003

Comment: see attached diagrams

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.12 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

Summary table with radiated data of the test plots

(RX)

Low Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1601.8504	52.46	-7.00	PK	45.46	54	8.54	140	290
	2400.1495	40.11	2.05	PK	42.16	54	11.84	160	320
	4802.0171	46.52	4.50	PK	51.02	54	2.98	175	284

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	1601.8504	49.83	-7.00	PK	42.83	54	8.54	11.17	294
	2400.1495	33.76	2.05	PK	39.81	54	11.84	14.19	317
	4802.0171	39.66	4.50	PK	44.16	54	2.98	9.84	291

Middle Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1626.7421	52.29	-6.91	PK	45.38	54	8.62	140	245
	2438.4321	41.55	0.73	PK	42.28	54	11.72	165	308
	2823.0042	34.17	-0.12	PK	34.05	54	19.95	170	312
	4834.2222	43.81	4.66	PK	48.47	54	5.53	190	296

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	1626.7421	49.00	-6.91	PK	42.09	54	11.91	145	241
	2438.4321	38.90	0.73	PK	39.63	54	14.37	160	314
	2823.0042	37.59	-0.12	PK	37.47	54	16.53	175	301

High Channel

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuV)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	1347.0427	37.48	-8.37	PK	29.11	54	24.89	180	293
	1650.0273	52.99	-6.81	PK	46.18	54	7.82	155	285
	2481.6581	44.72	-1.92	PK	42.80	54	11.20	125	301

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	1347.0427	39.75	-8.37	PK	31.38	54	22.62	185	298
	1650.0273	48.13	-6.81	PK	41.32	54	12.68	160	281
	2481.6581	39.98	-1.92	PK	38.06	54	15.94	130	307

Summary table with radiated data of the test plots
(Digital)

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
H	30.000	10.28	12.3	QP	22.58	30.0	7.42	305	243
	150.468	10.59	14.67	QP	25.26	30.0	4.74	315	278
	944.776	4.39	27.79	QP	32.18	37.0	4.82	255	342

Antenna Polarization	Frequency Marker (MHz)	Corrected Reading (dBuv)	Correction Factor (dB)	Detector	Test Result (dBuV/m)	Compliance Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Azimuth (degree)
V	30.0150	13.57	12.30	QP	25.87	30.0	4.13	113	289
	96.0149	9.09	10.36	QP	19.45	30.0	10.55	245	240
	944.7760	3.36	27.79	QP	31.15	37.0	5.85	310	321

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
 2. The formula of measured value as: Test Result = Corrected Reading + Correction Factor
 3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-CS 001, ETSTW-RE 026, ETSTW-RE 003, ETSTW-RE 025

Comment: see attached diagram

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

3.13 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dBμV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
N	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.380	32.89	16.28	10.10	42.99	26.38	58.28	48.28	15.29	21.90
	2.130	32.36	0.16	10.10	42.46	10.26	56.00	46.00	13.54	35.74
	17.140	36.66	0.76	10.10	46.76	10.86	60.00	50.00	13.24	39.14

LISN type	Frequency Marker	Corrected Reading (dBuV)		Correction Factor	Test Result (dBuV)		Compliance Limit (dBuV)		Margin (dB)	
L1	MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	0.390	36.07	12.86	10.10	46.17	22.96	58.06	48.06	11.89	25.10
	0.580	38.57	14.76	10.10	48.67	24.86	56.00	46.00	7.33	21.14
	2.120	39.34	12.46	10.10	49.44	22.56	56.00	46.00	6.56	23.44
	16.360	35.71	0.58	10.10	45.81	10.68	60.00	50.00	14.19	39.32

Note: 1. The formula of measured value as: Test Result = Corrected Reading + Correction Factor

2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss

3. Detector function in the form : P = Peak, QP = Quasi Peak, AV = Average

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 004, ETSTW-CE 001, ETSTW-RE 023

Comment: see attached diagram

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41


Appendix

- A Peak Output Power
- B Spurious Emissions radiated
- C Carrier Frequency Separation
- D Number of Hopping Frequencies
- E Time of Occupancy (Dwell Time)
- F 20dB Bandwidth
- G Band-edge Compliance of RF Conducted Emissions
- H Radiated Emissions from Receiver Section of Transceiver
- I Power Line Conducted Emission

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41


Appendix A

Peak Output Power

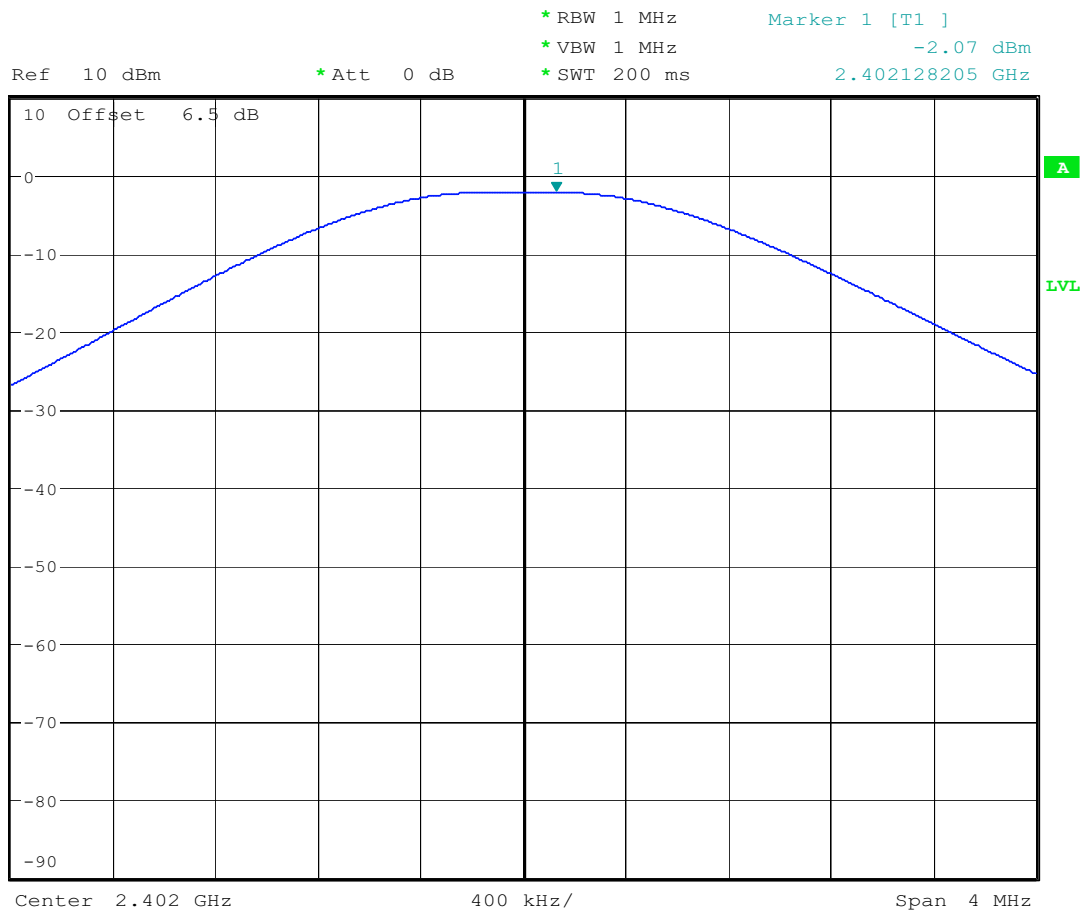


MAX OUTPUT POWER CH 0


Date: 26.OCT.2006 14:31:23

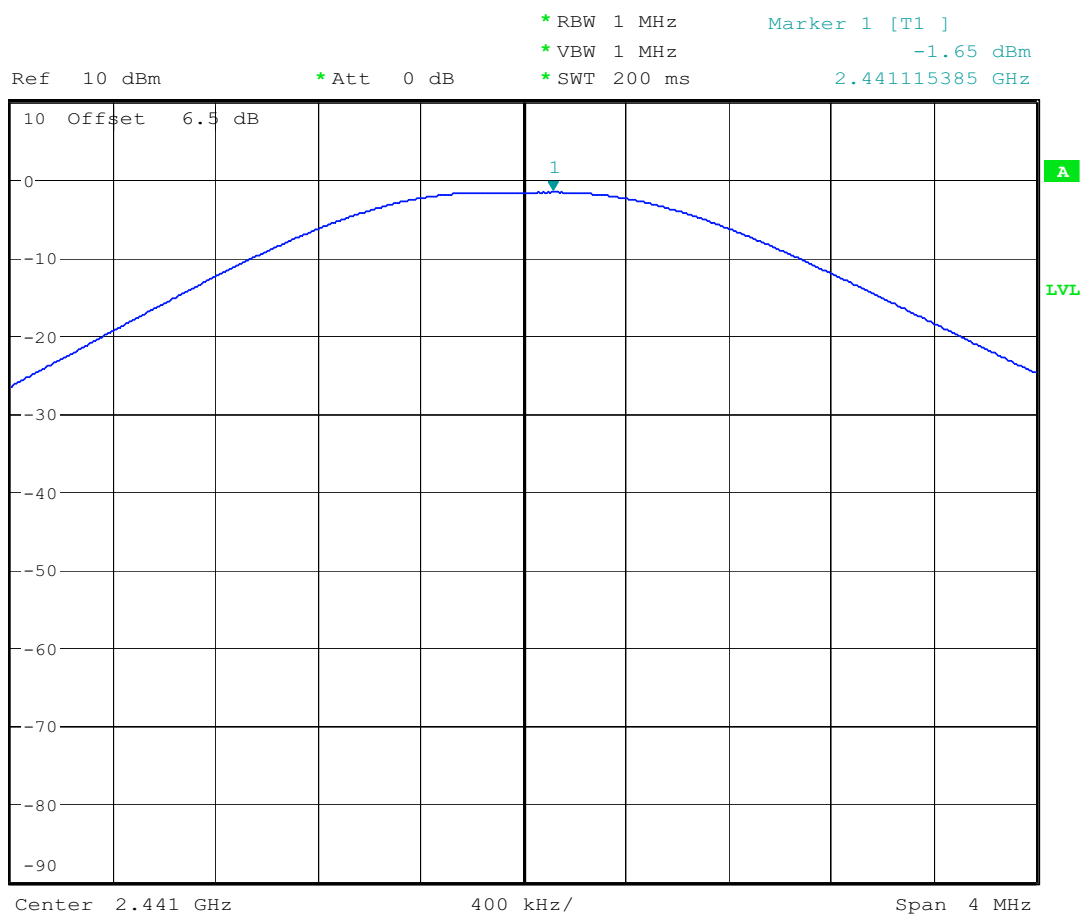

Date: 26.OCT.2006 14:30:58

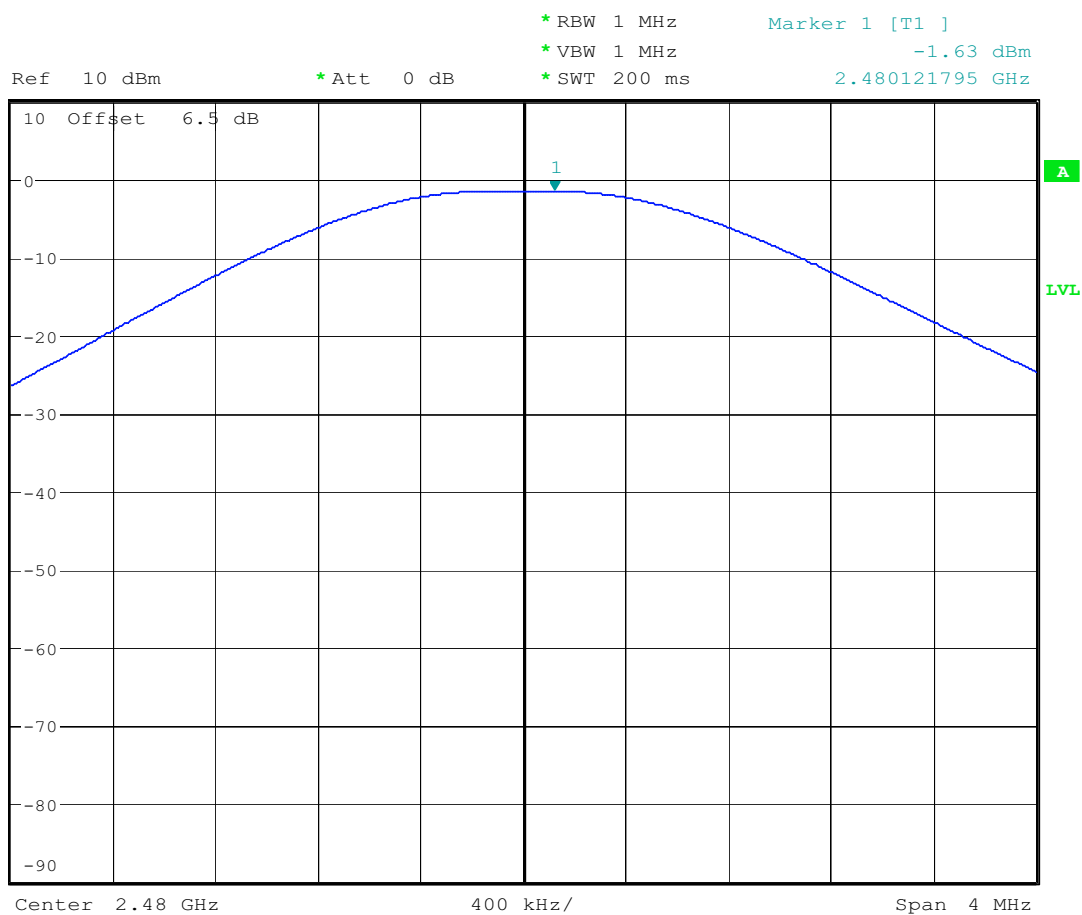


Date: 26.OCT.2006 14:29:54

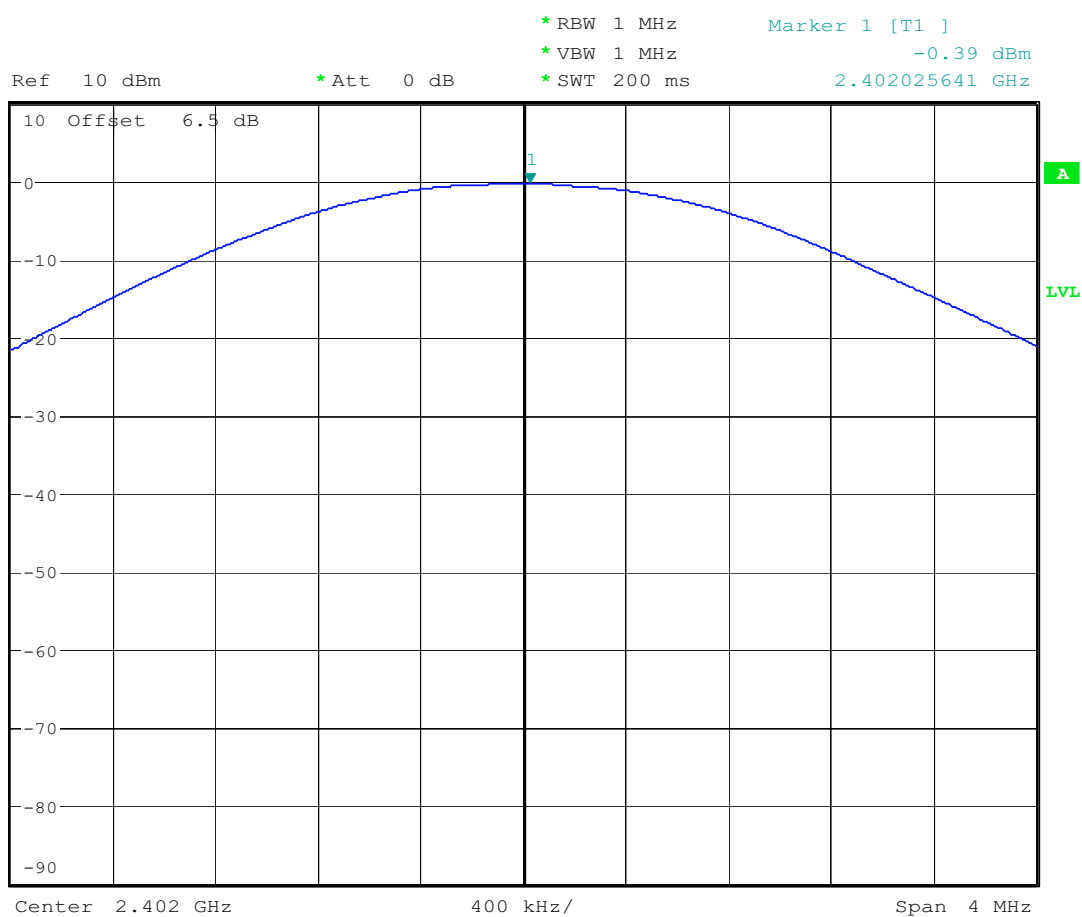


MAXOUTPU POWER CH 0 EDR Mode

Date: 26.OCT.2006 14:31:46

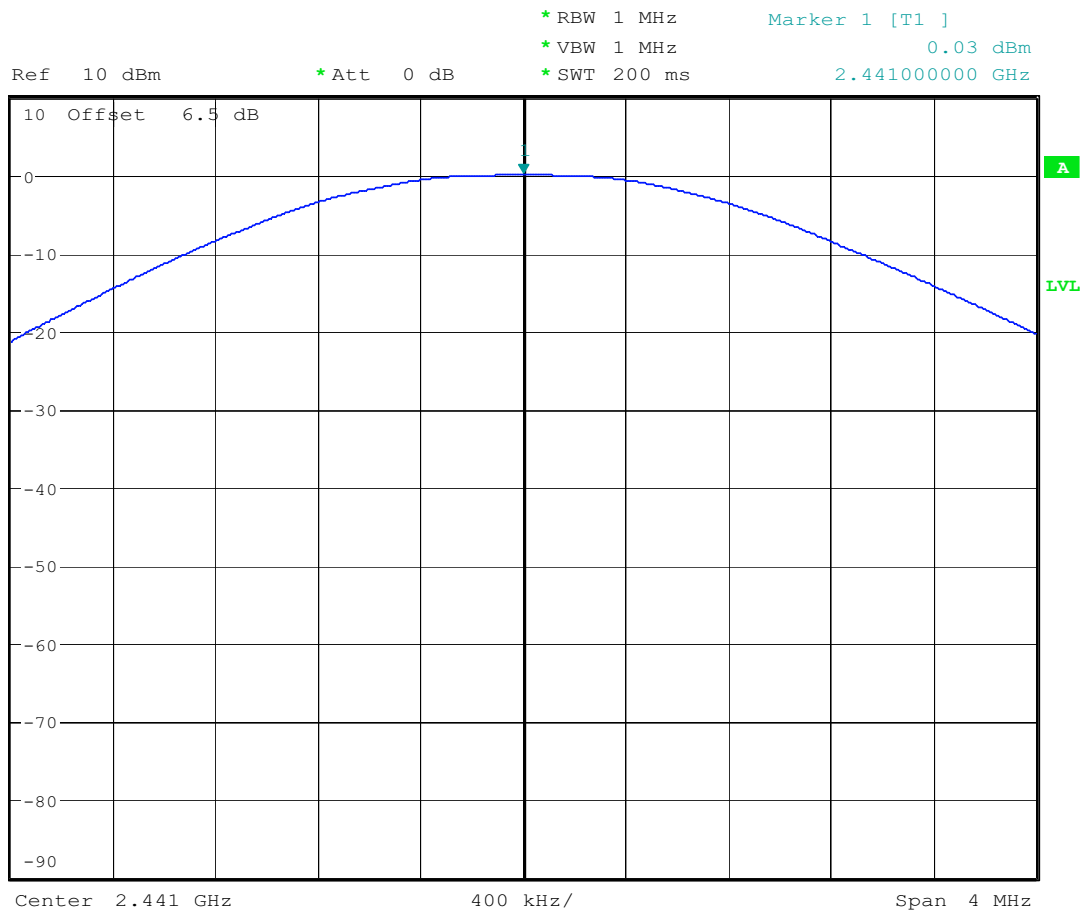

MAXOWPW POWER CH 39 EDR Mode

Date: 26.OCT.2006 14:30:40

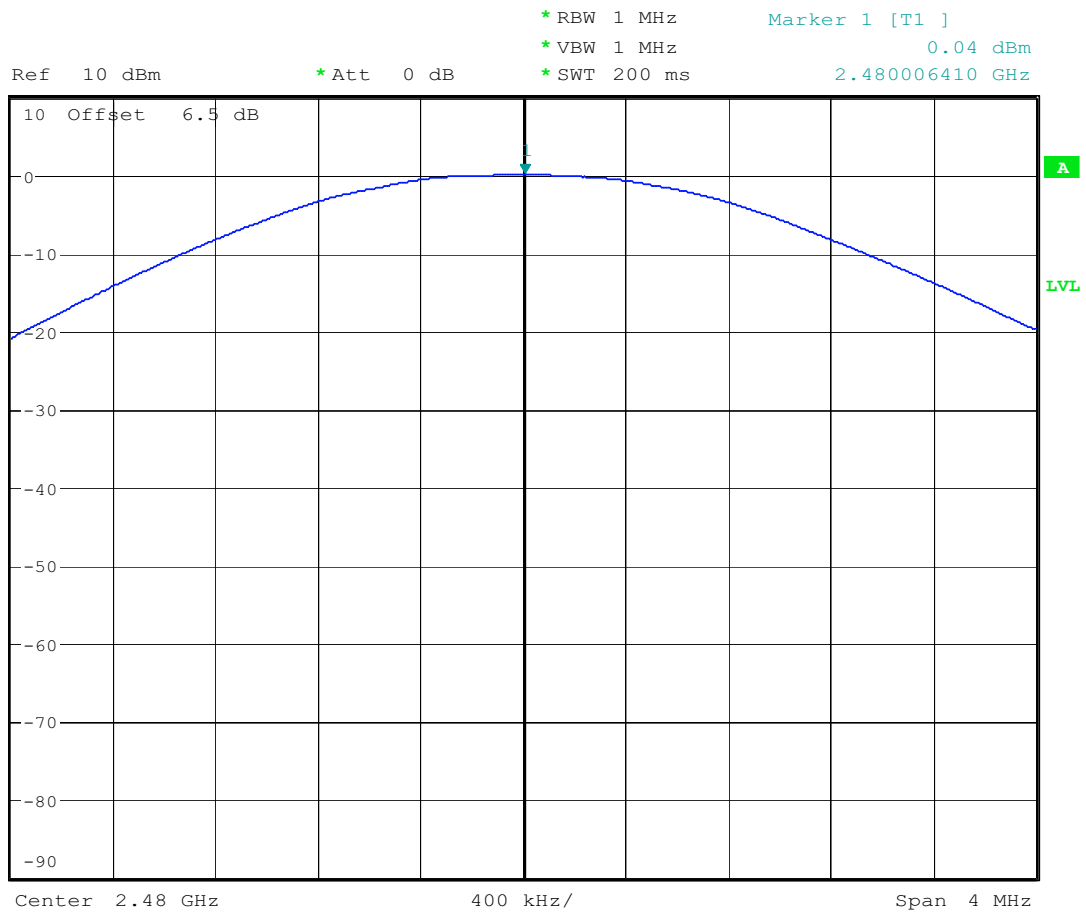


MAXOWPW POWER CH 78 EDR Mode

Date: 26.OCT.2006 14:30:10


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order N  ber : W6M20609-7424   n
Test Site / Operator: ES / M  el
Temperature: Temp.: 23.9  C
adding to 5.247
Comment 1: Dist.: 3m, Ant.: H  25
Freq 2.402GHz, Max 97.83dB  /m, RBW: 1MHz

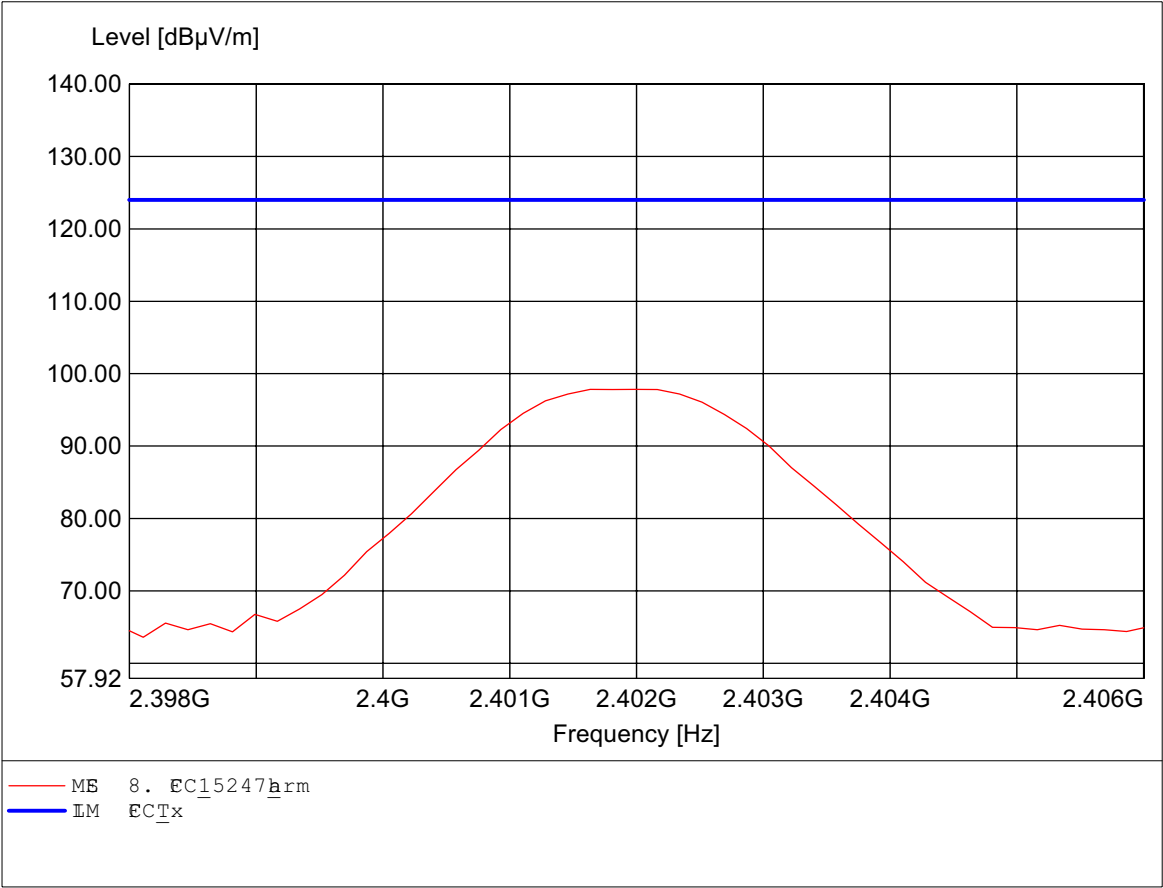


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order N  ber : W6M20609-7424   
Test Site / Operator: ES / M  el
Temperature: Temp.: 23.9  
addingto\$5.247
Comment 1: Dist.: 3m,Ant.: H  25
Freq 2.402GHz,Max 93.34dB  /m,RBW: 1MHz

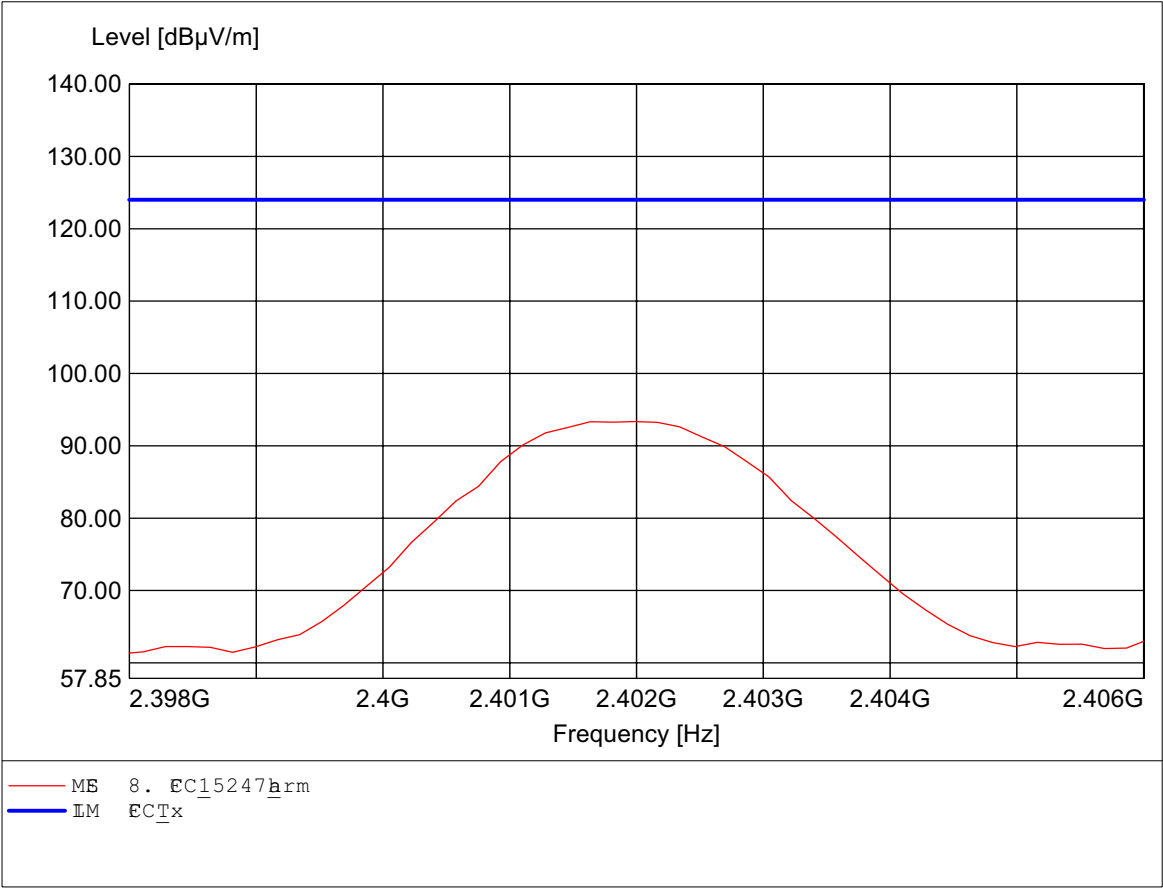


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.441GHz, Emax: 96.11dBµV/m, RBW: 1MHz

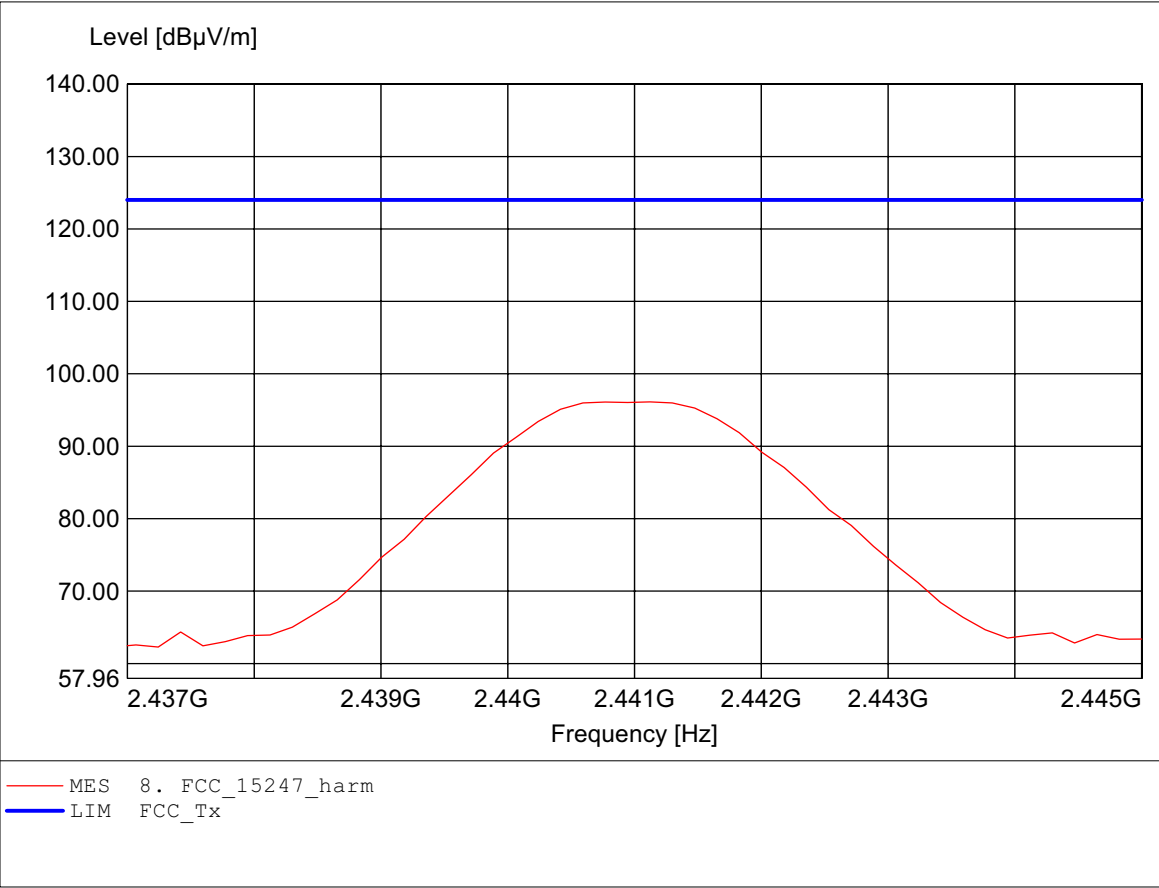


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.441GHz, Emax: 93.15dBμV/m, RBW: 1MHz

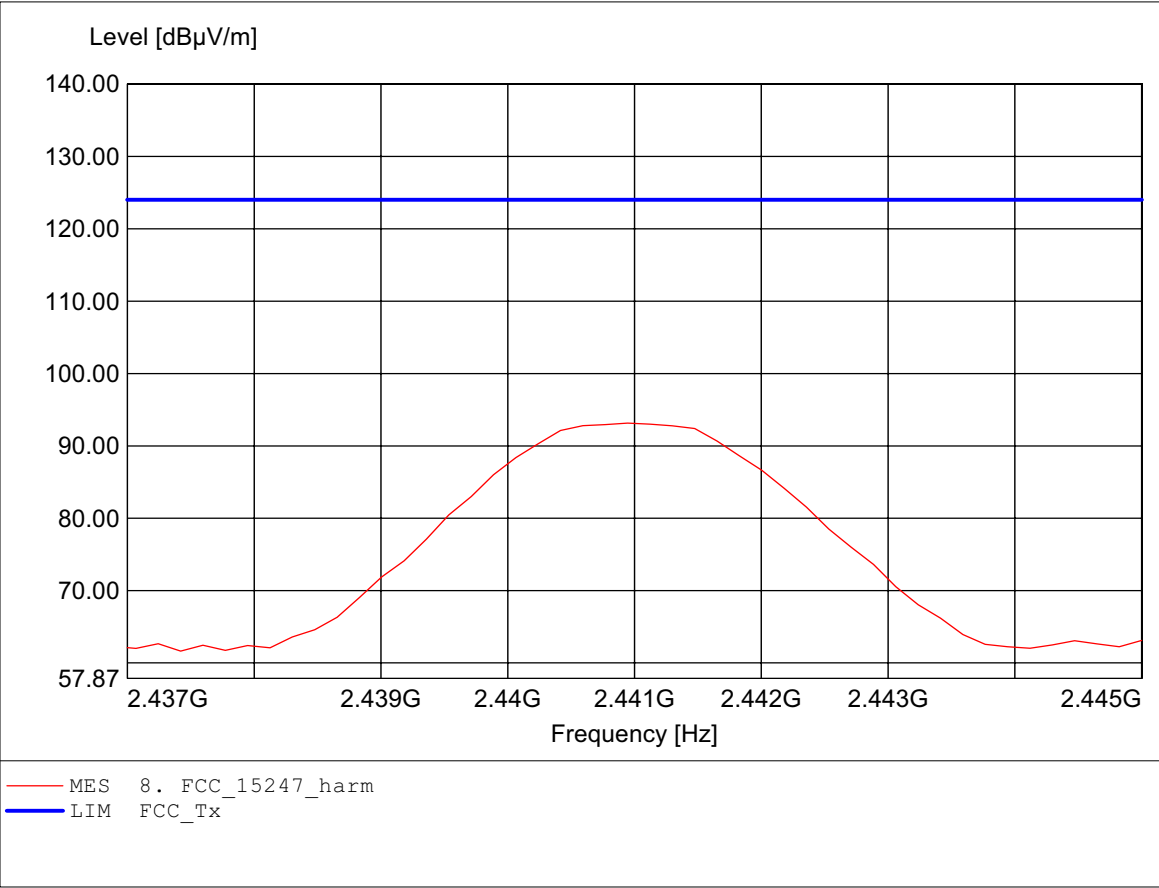


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.480GHz, Emax: 94.06dBμV/m, RBW: 1MHz

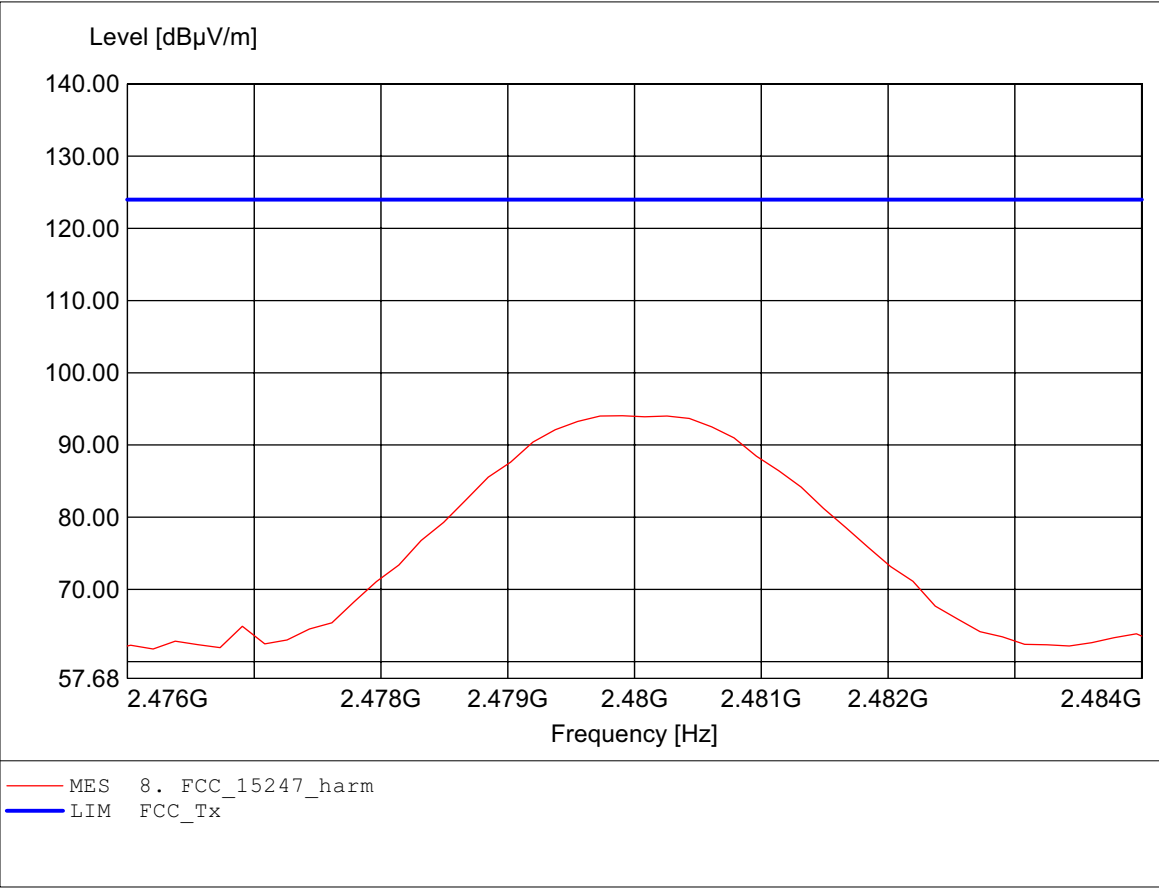

Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Freq: 2.480GHz, Emax: 92.02dBμV/m, RBW: 1MHz

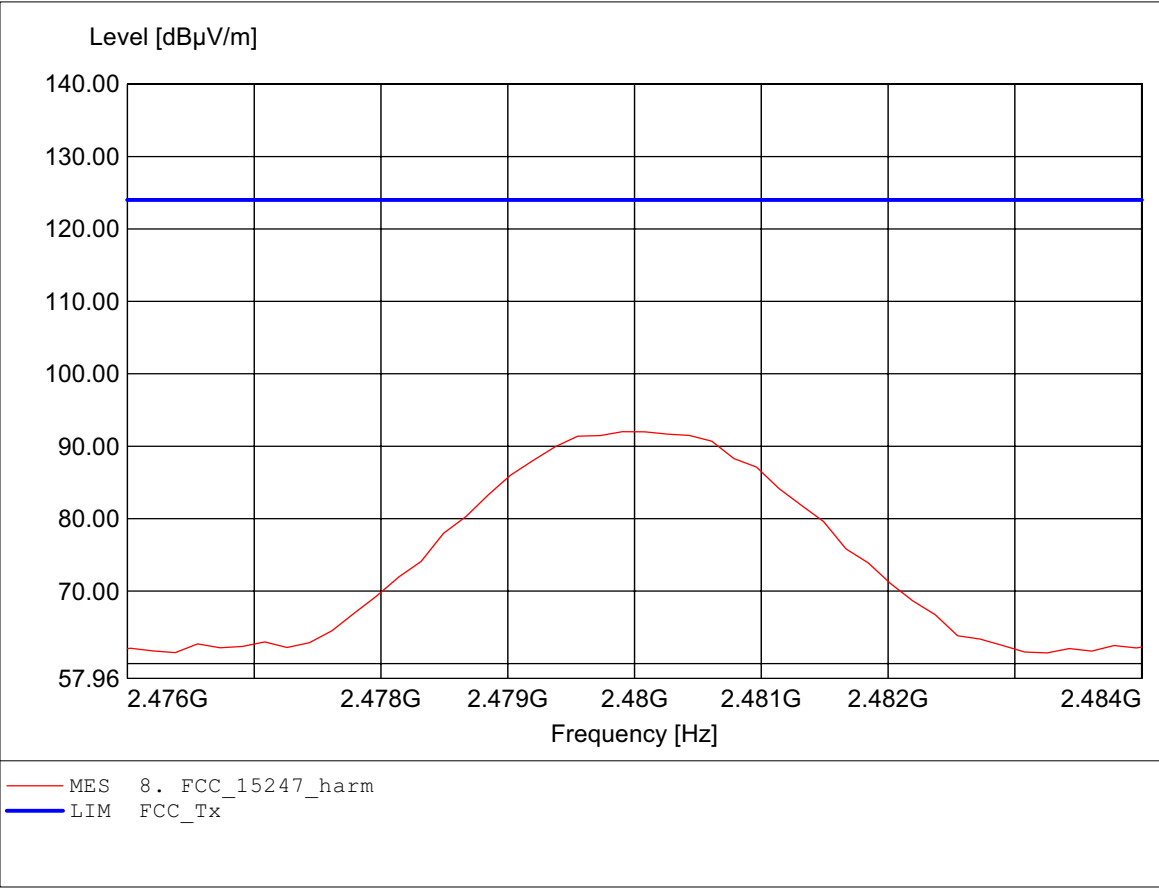

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41


Appendix B

Spurious Emissions radiated

The measurement diagrams plots attached below are preliminary wideband scan with a peak detector and for reference only. The final test results are listed on section 3.6

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 196.458MHz, Emax: 34.07dBµV/m, RBW: 100kHz

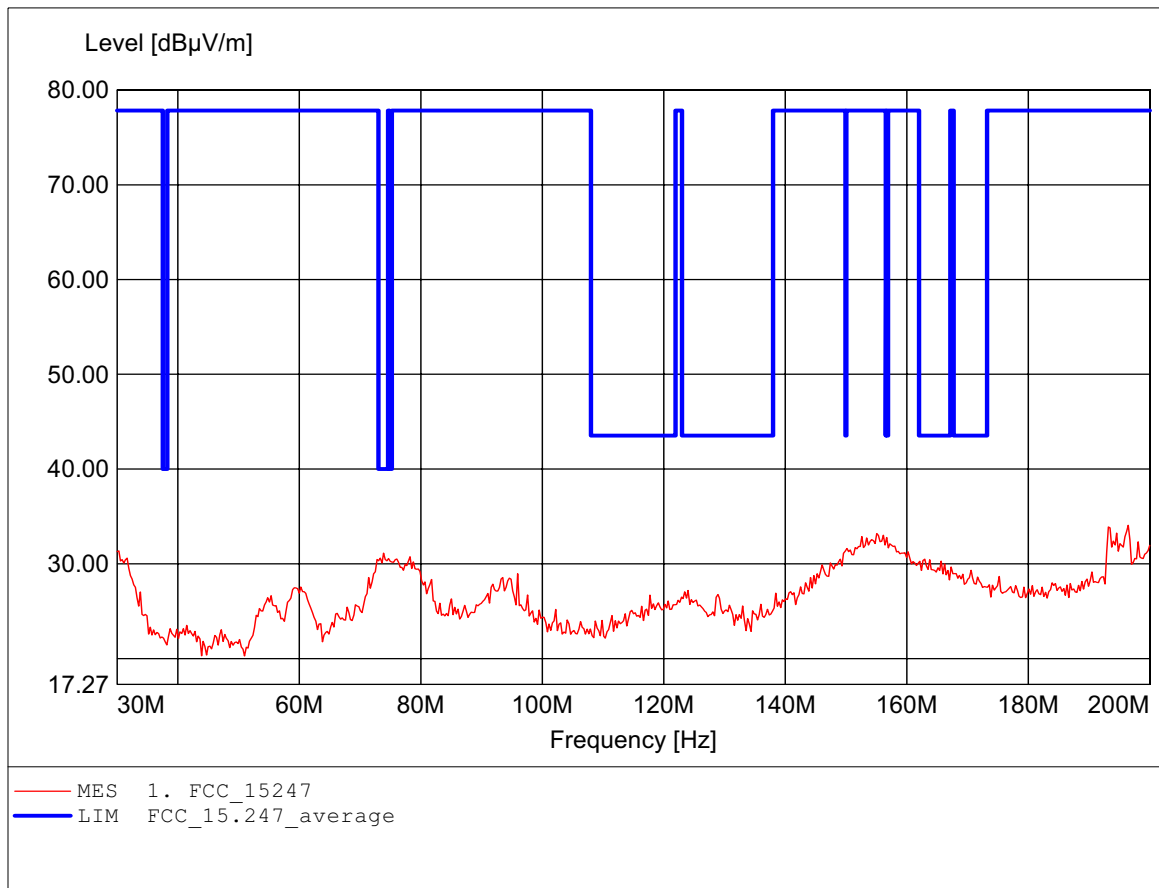

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.000MHz, Emax: 43.13dBµV/m, RBW: 100kHz

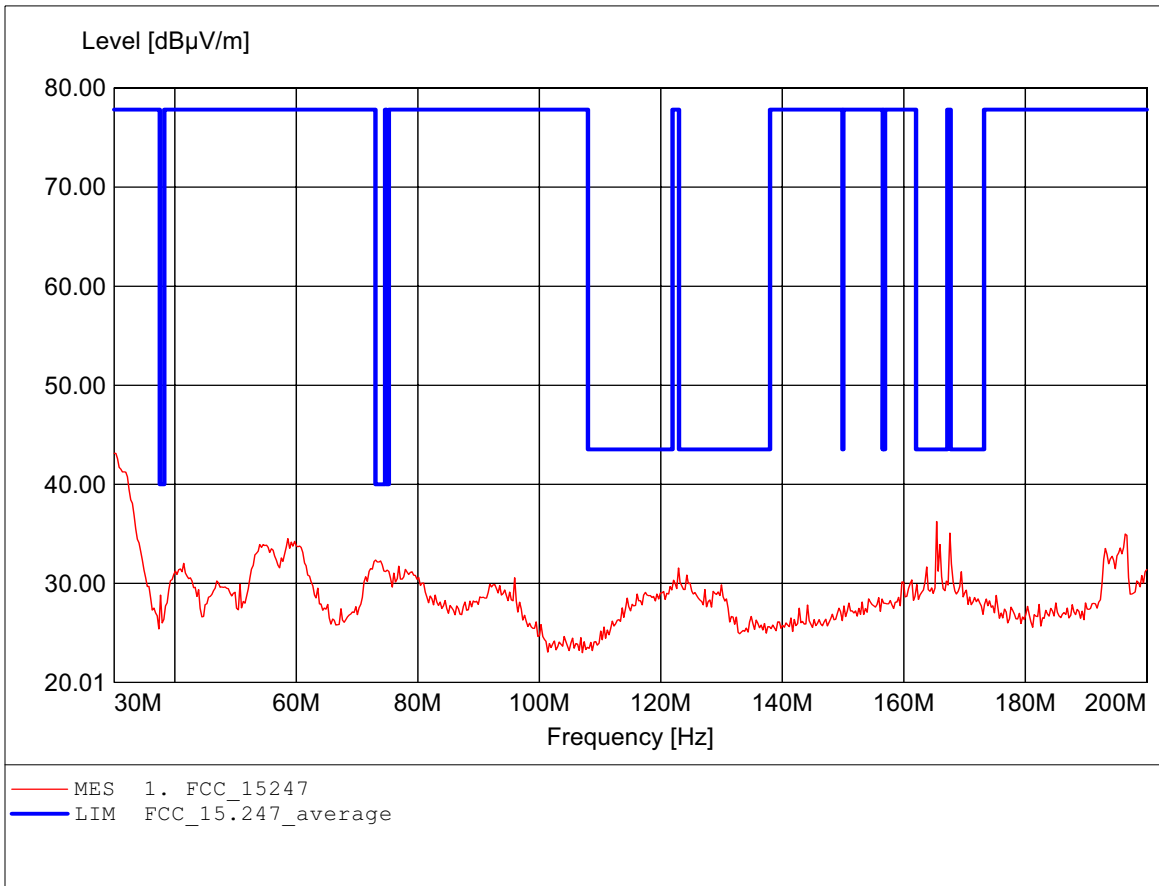

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 980.769MHz, Emax: 47.35dBμV/m, RBW: 100kHz

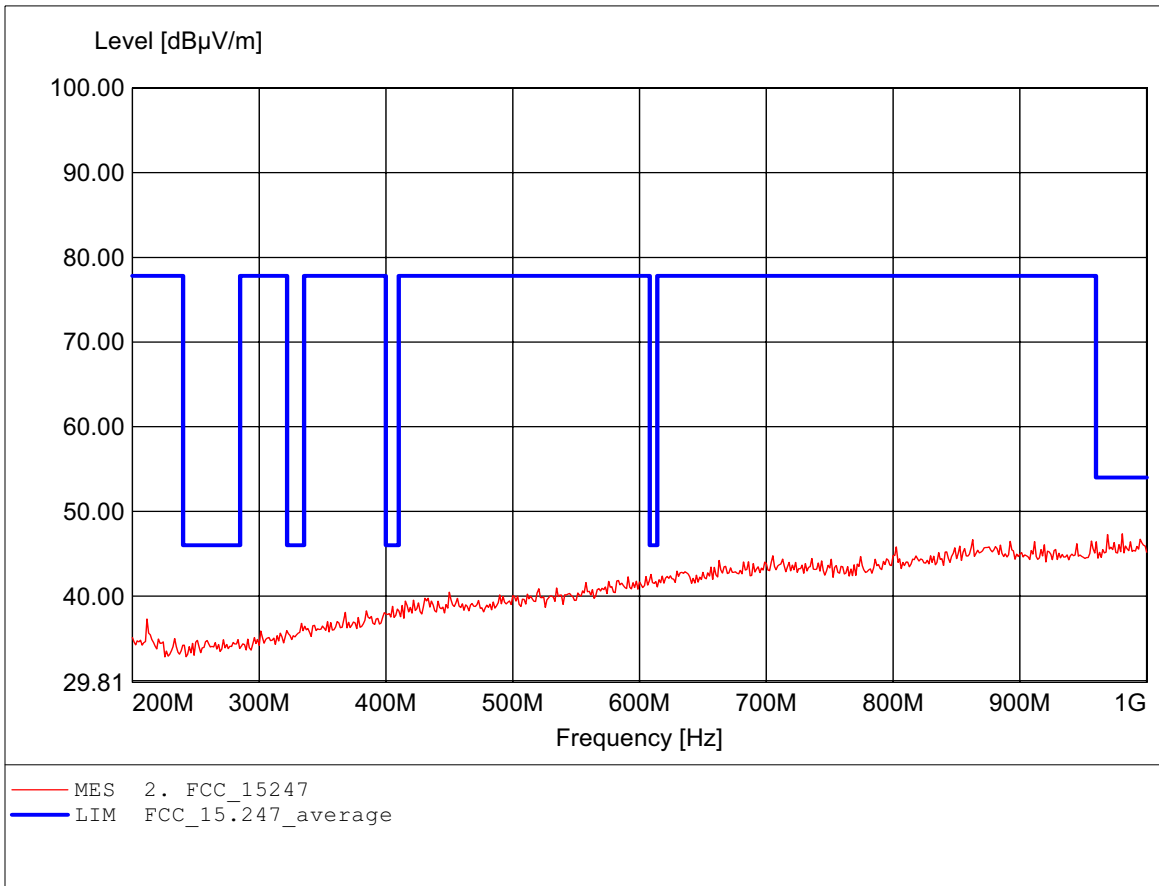

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 974.359MHz, Emax: 46.80dBµV/m, RBW: 100kHz

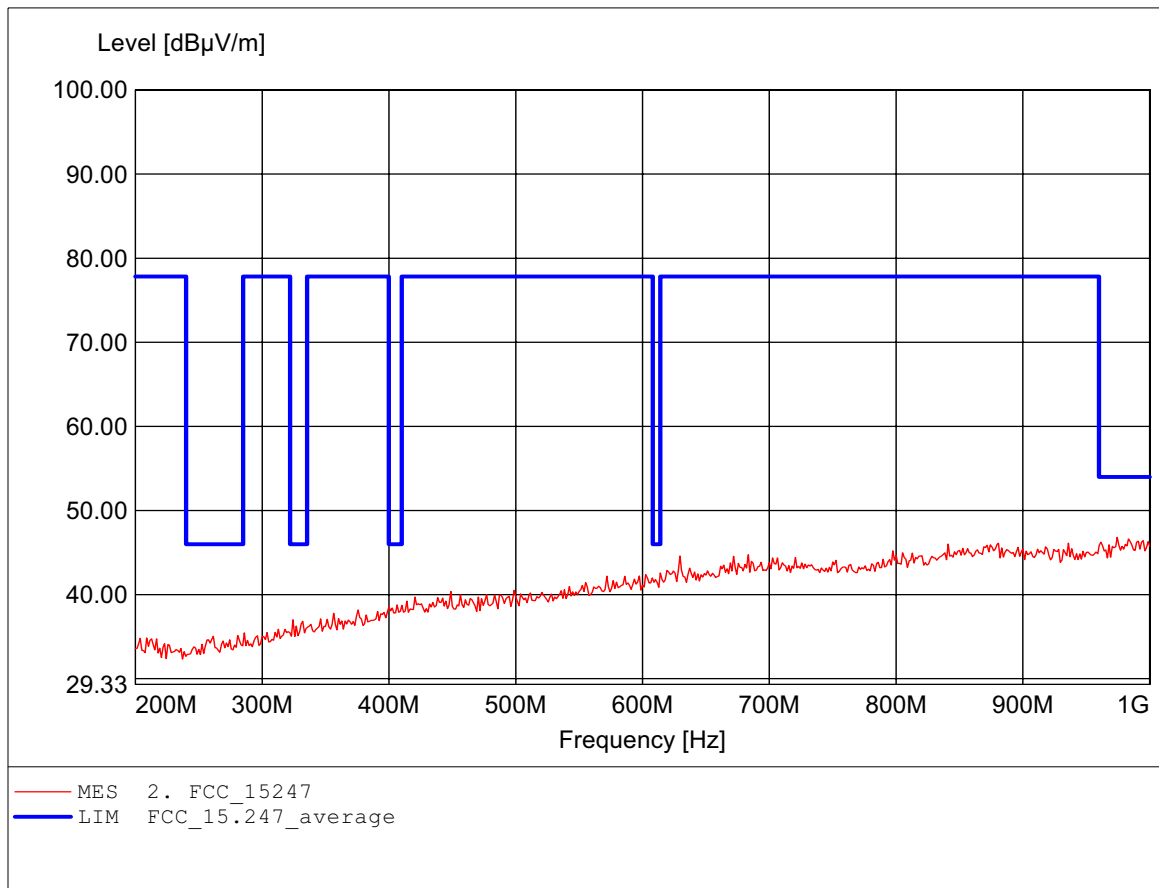

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.371GHz, Emax: 58.14dBμV/m, RBW: 1MHz

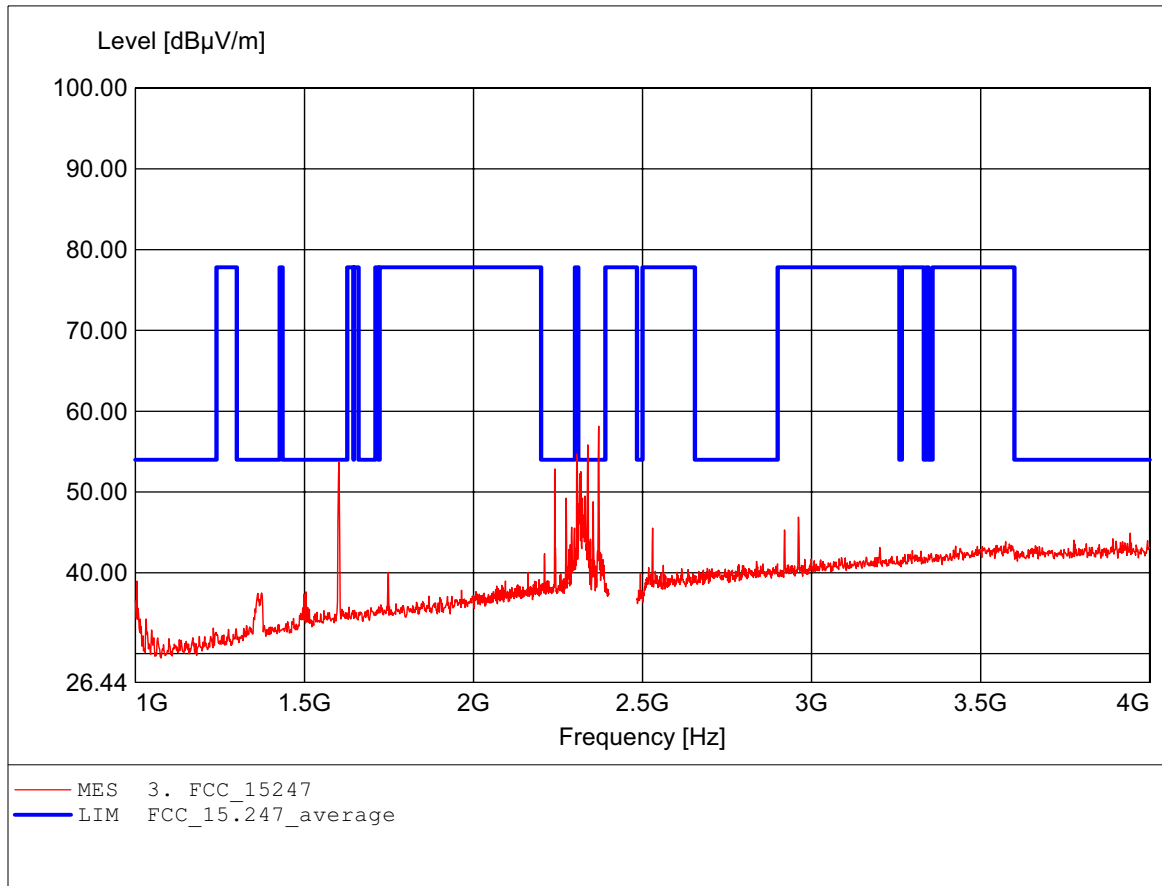

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.371GHz, Emax: 56.18dBμV/m, RBW: 1MHz

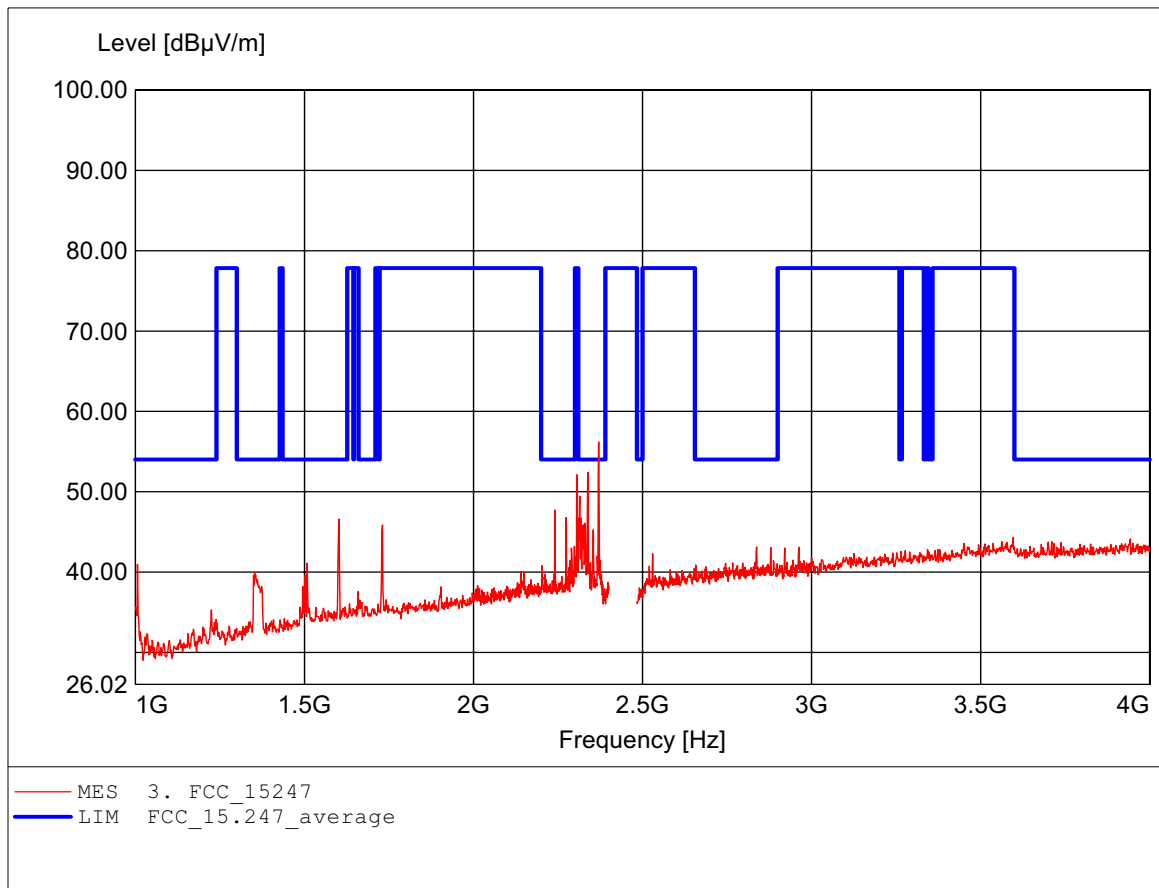


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.801GHz, Emax: 63.35dBμV/m, RBW: 1MHz

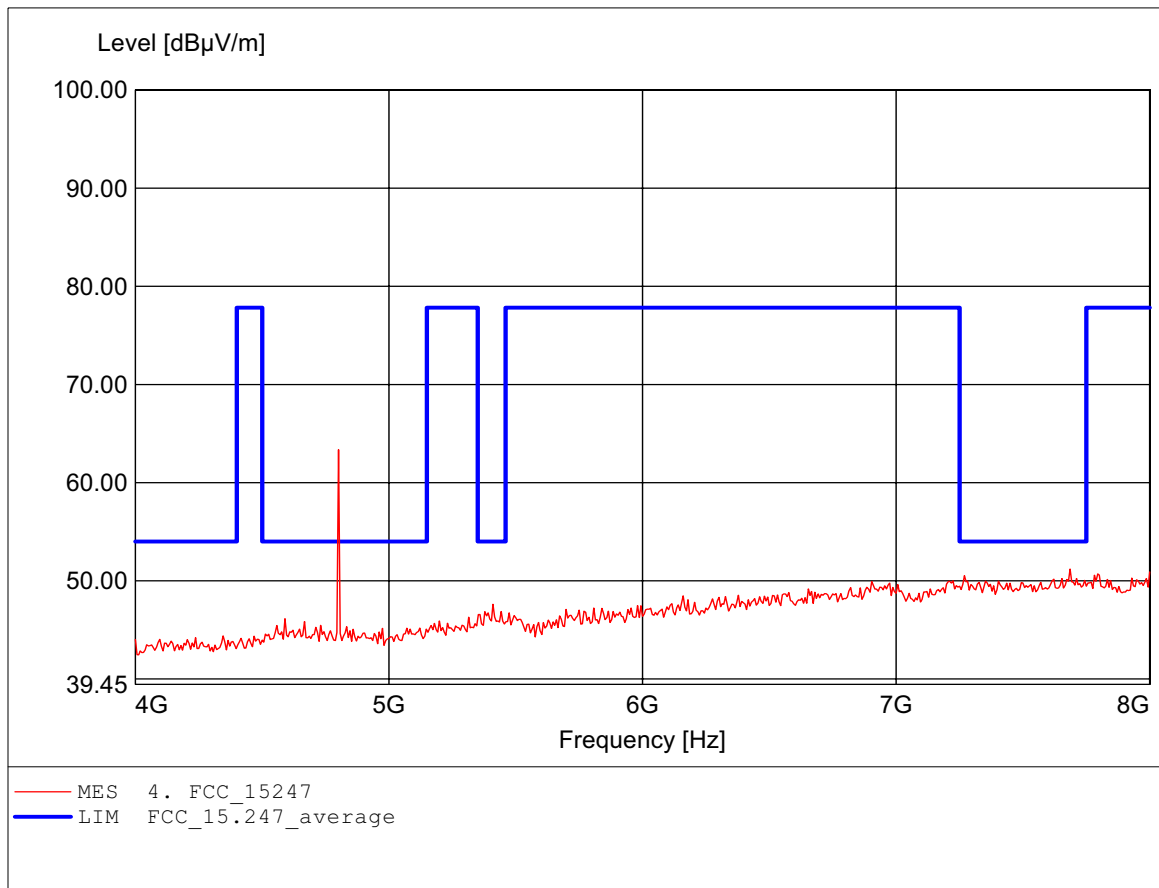


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.801GHz, Emax: 57.26dBμV/m, RBW: 1MHz

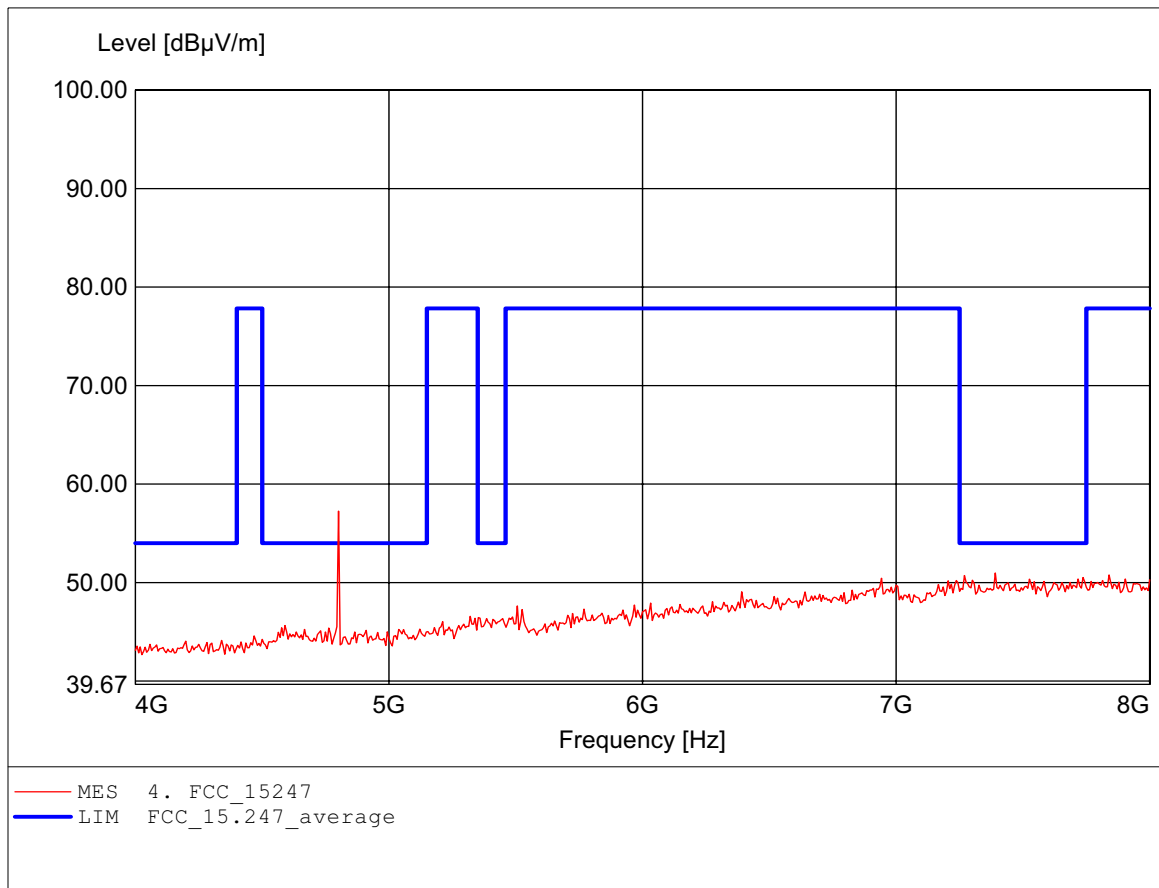


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.974GHz, Emax: 46.79dBμV/m, RBW: 1MHz

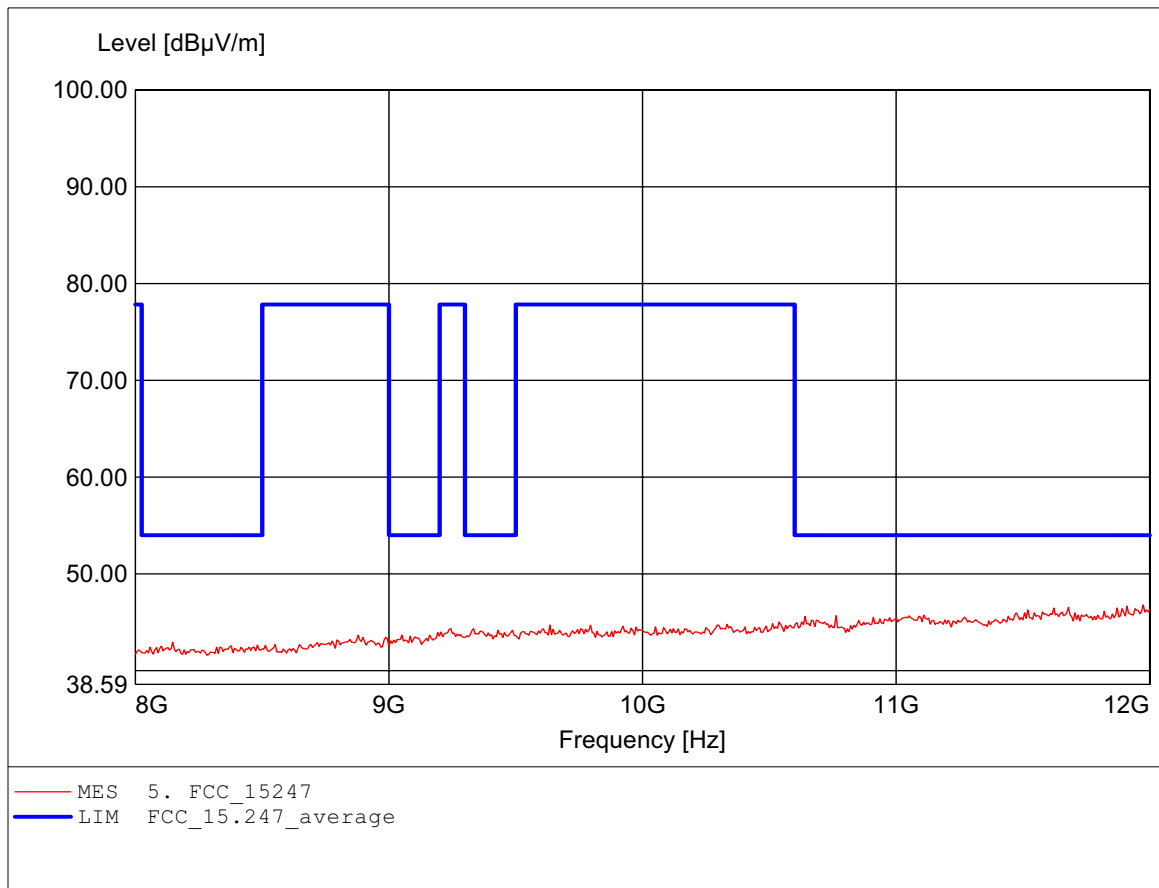


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 12.000GHz, Emax: 46.94dBµV/m, RBW: 1MHz

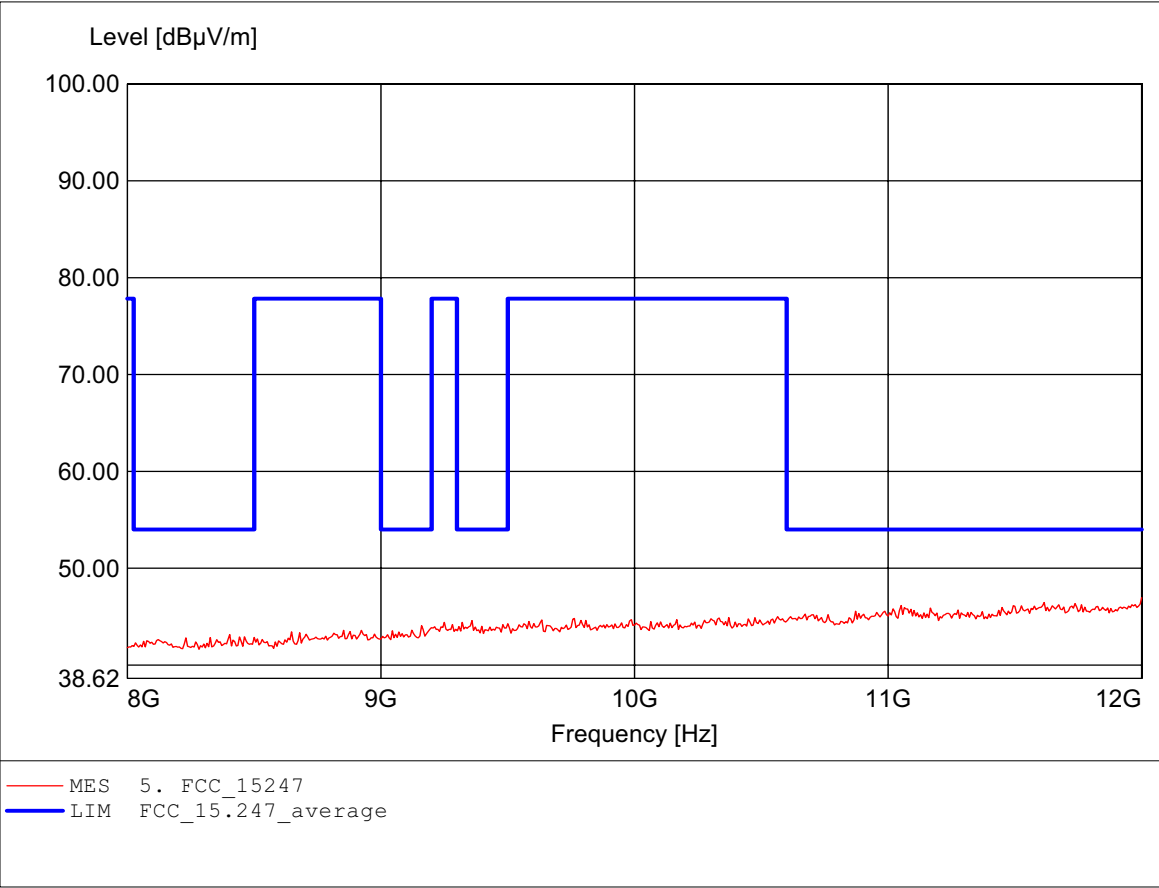


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.269GHz, Emax: 50.52dBμV/m, RBW: 1MHz

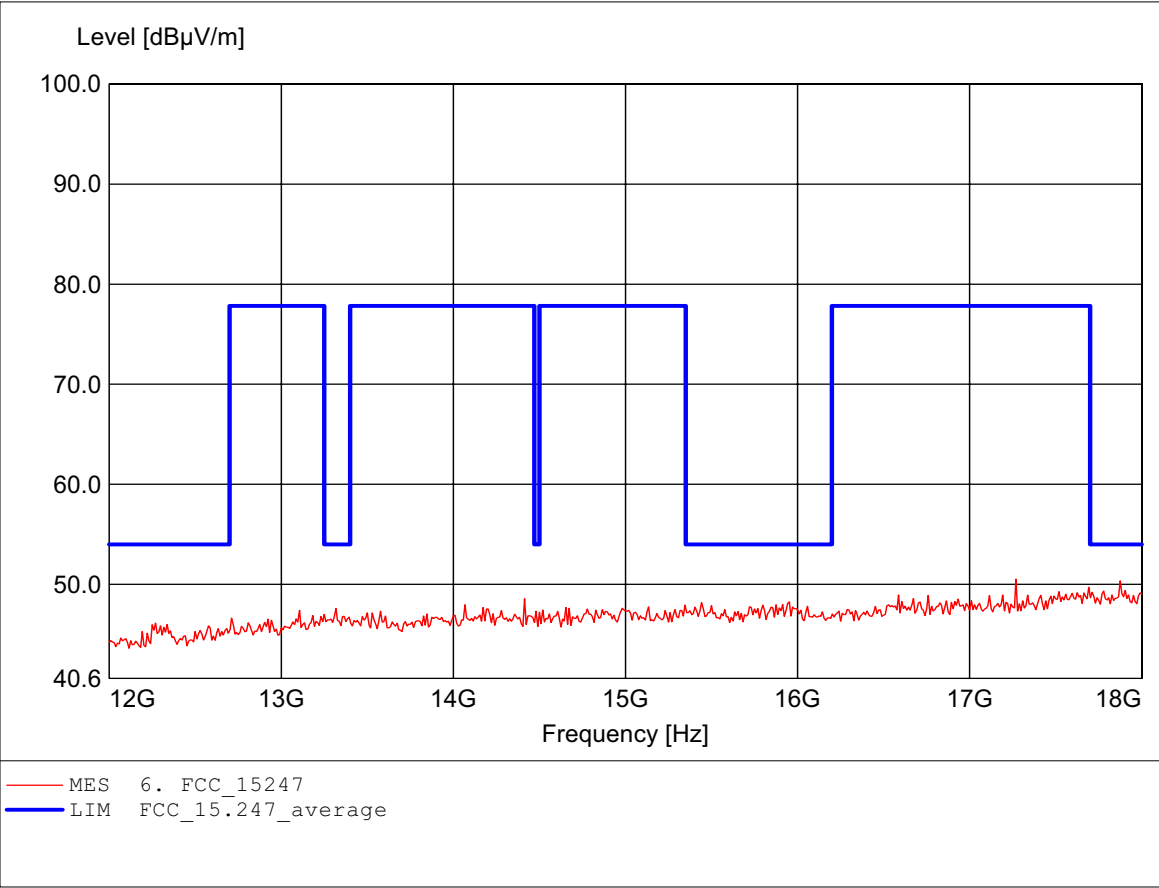


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.875GHz, Emax: 50.23dBµV/m, RBW: 1MHz

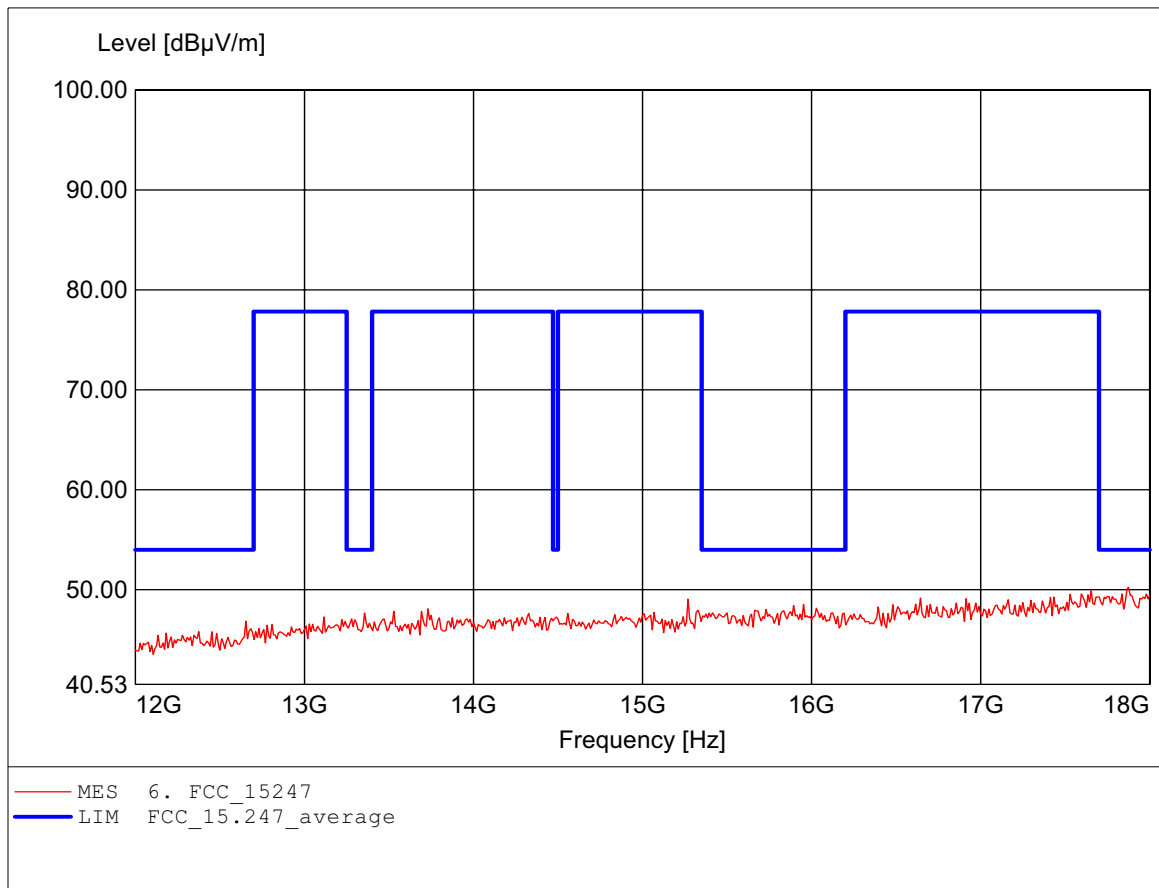


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order N  ber : W6M20609-7424   n
Test Site / Operator: ES / M  el
Temperature: Temp.: 23.9  
adding to 5.247, peak detected
Comment 1: Dist.: 3m, Ant.: H  25, amp f.
Freq 26.473GHz, max 51.63dB  /m, RBW: 1MHz

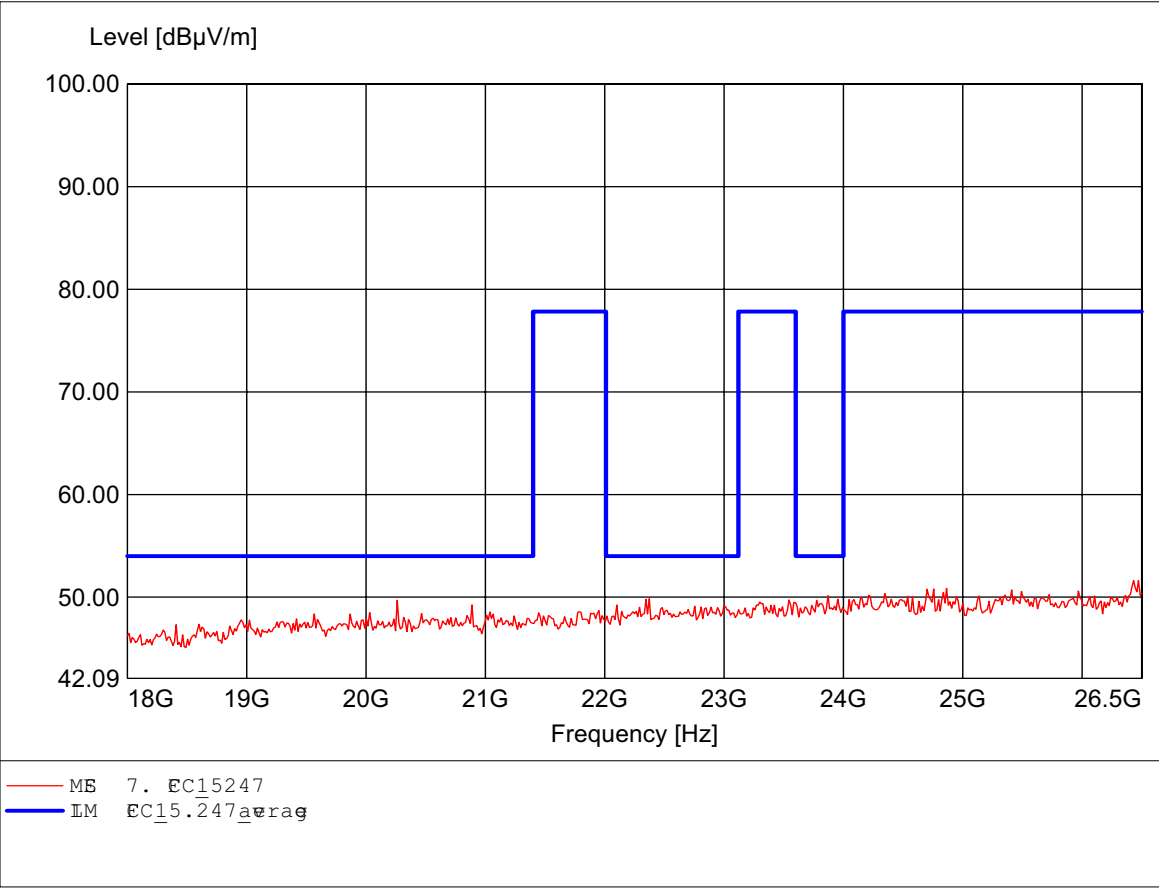

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order N  ber : W6M20609-7424   n
Test Site / Operator: ES / M  el
Temperature: Temp.: 23.9  
adding to 5.247, peak detected
Comment 1: Dist.: 3m, Ant.: H025, amp f.
Freq 25.383GHz, max 51.36dB  /m, RBW: 1MHz

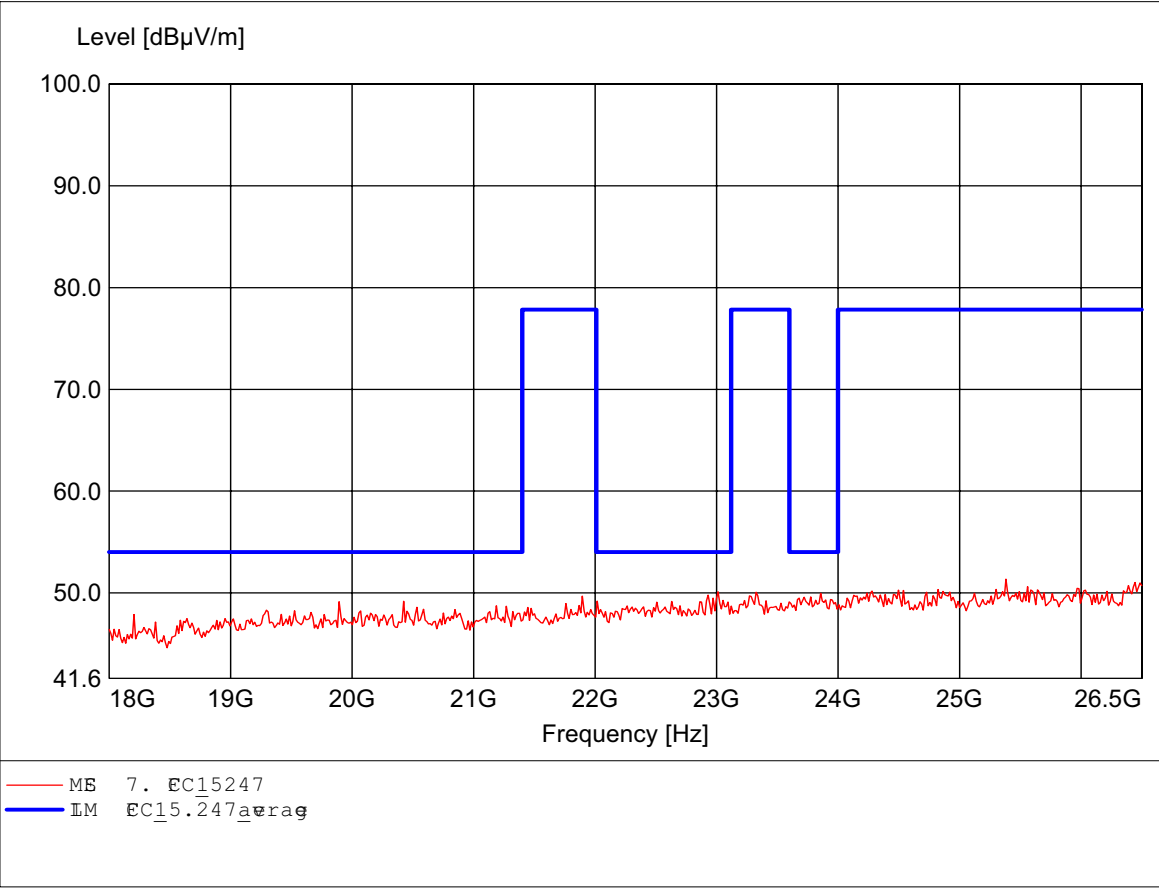

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 155.048MHz, Emax: 40.57dBμV/m, RBW: 100kHz

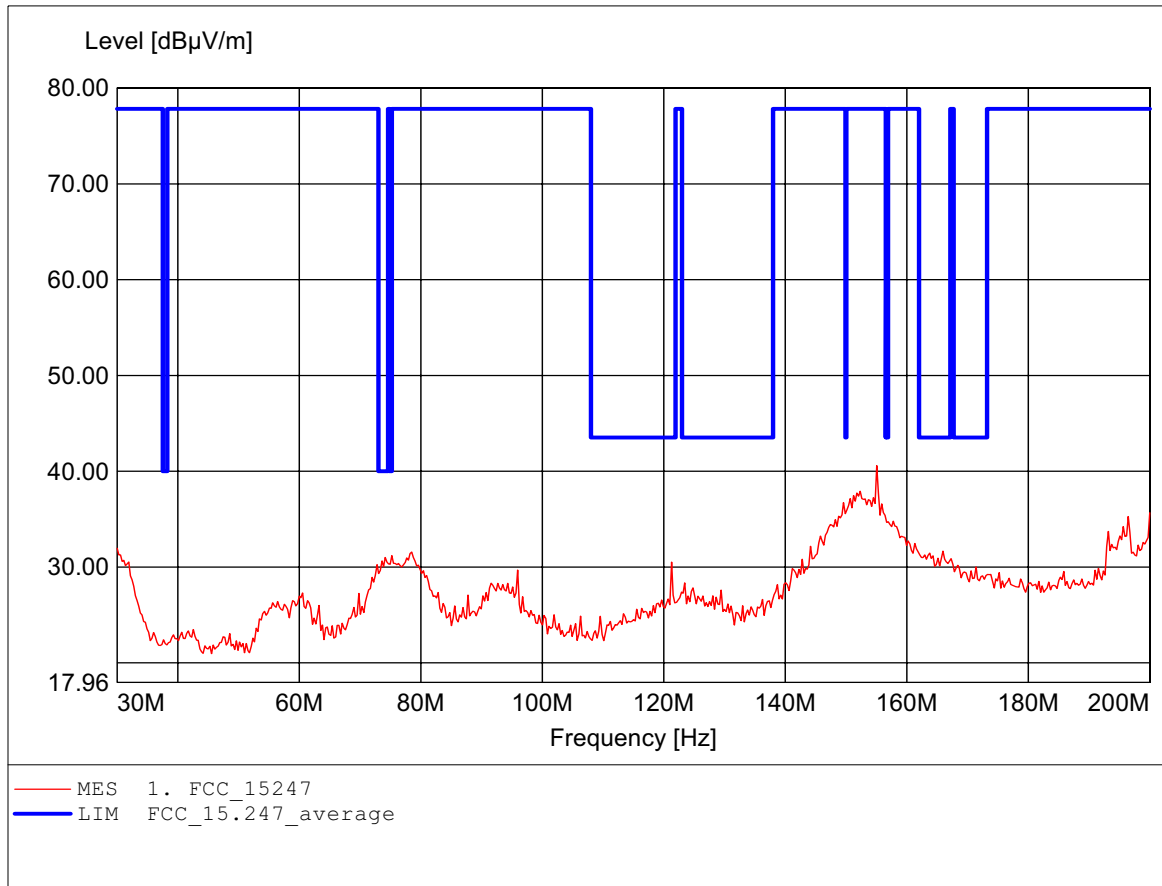

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.000MHz, Emax: 43.23dBµV/m, RBW: 100kHz

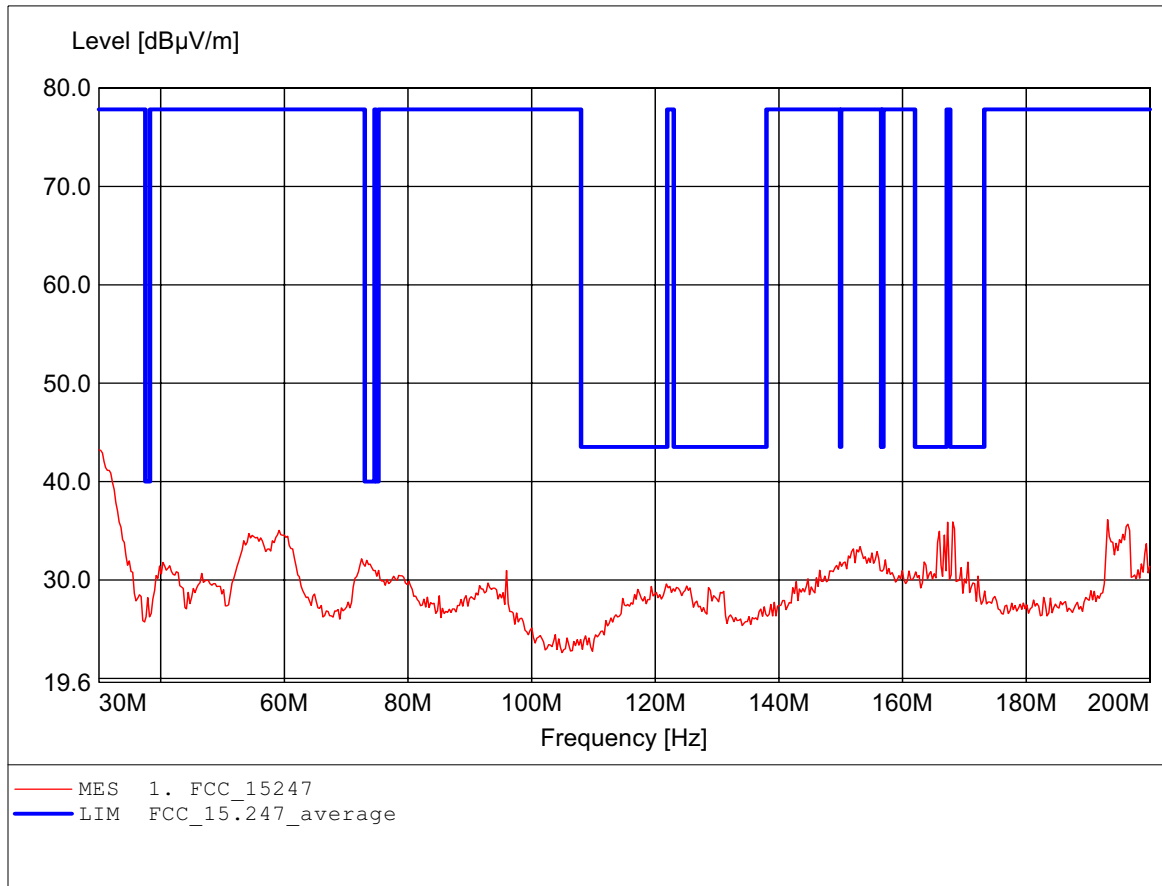


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 957.692MHz, Emax: 46.64dBμV/m, RBW: 100kHz

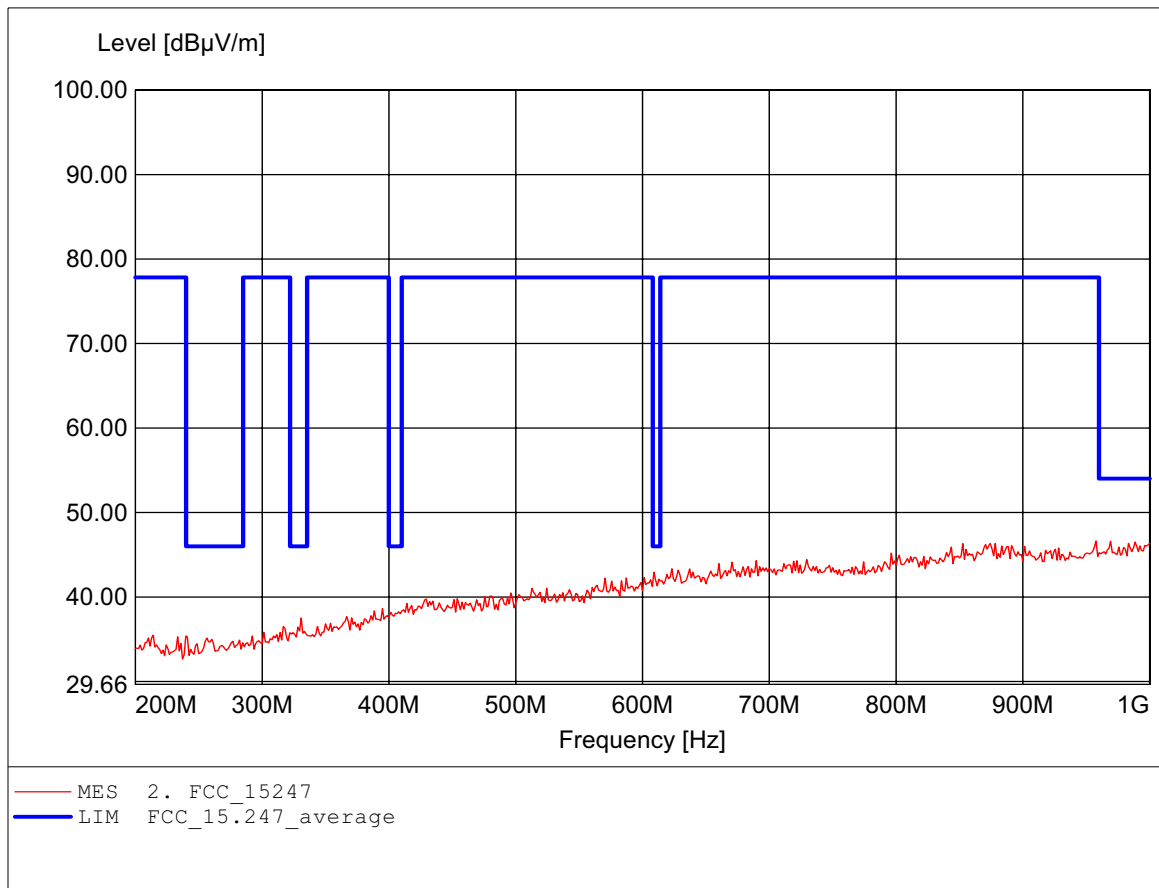

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 973.077MHz, Emax: 47.82dBµV/m, RBW: 100kHz

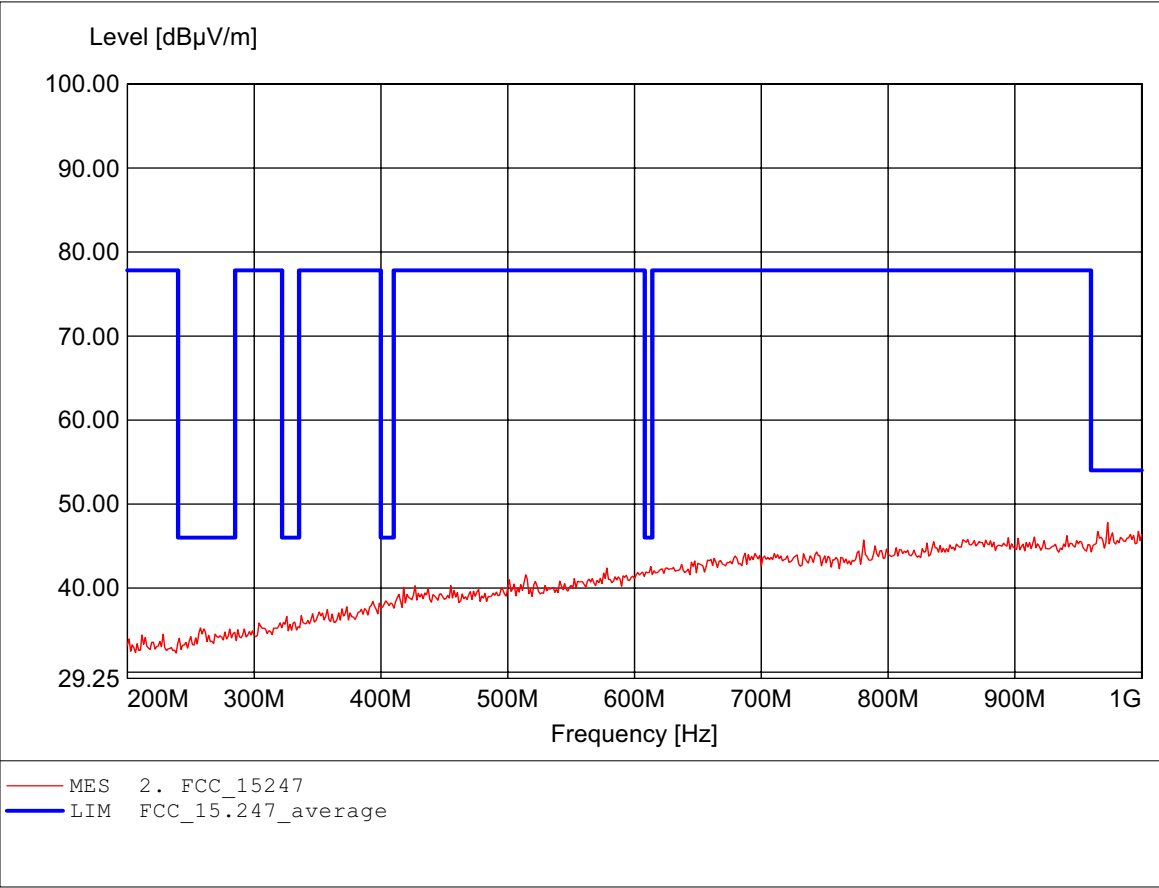

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.345GHz, Emax: 54.66dBμV/m, RBW: 1MHz

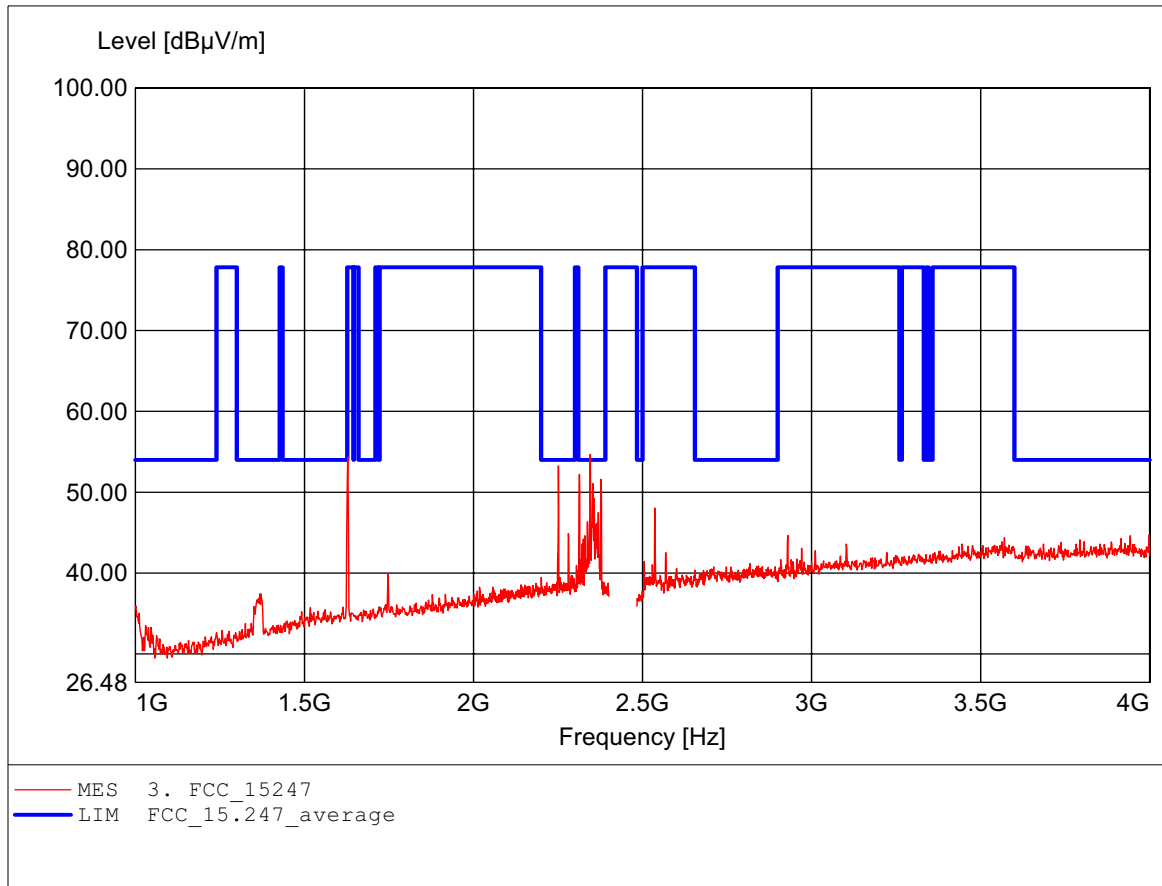

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.345GHz, Emax: 51.33dBμV/m, RBW: 1MHz

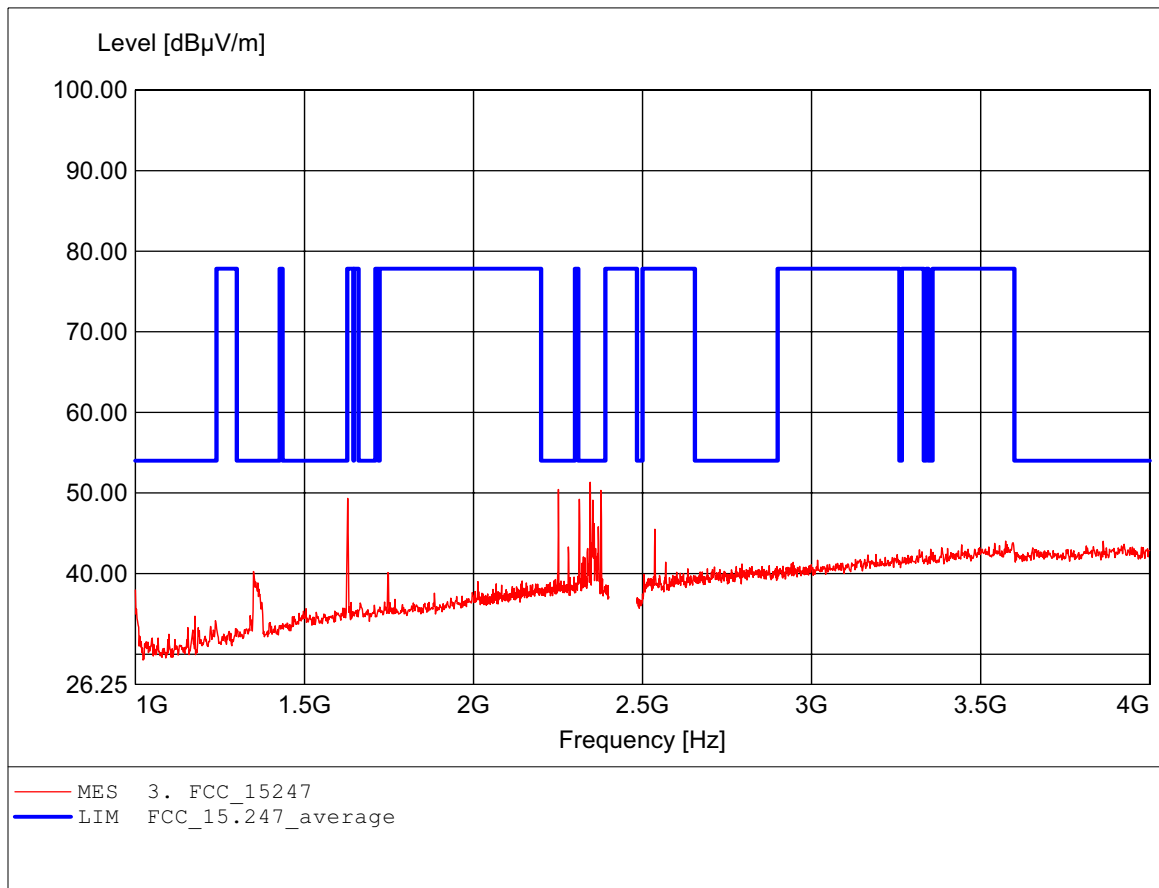


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.878GHz, Emax: 57.51dBμV/m, RBW: 1MHz

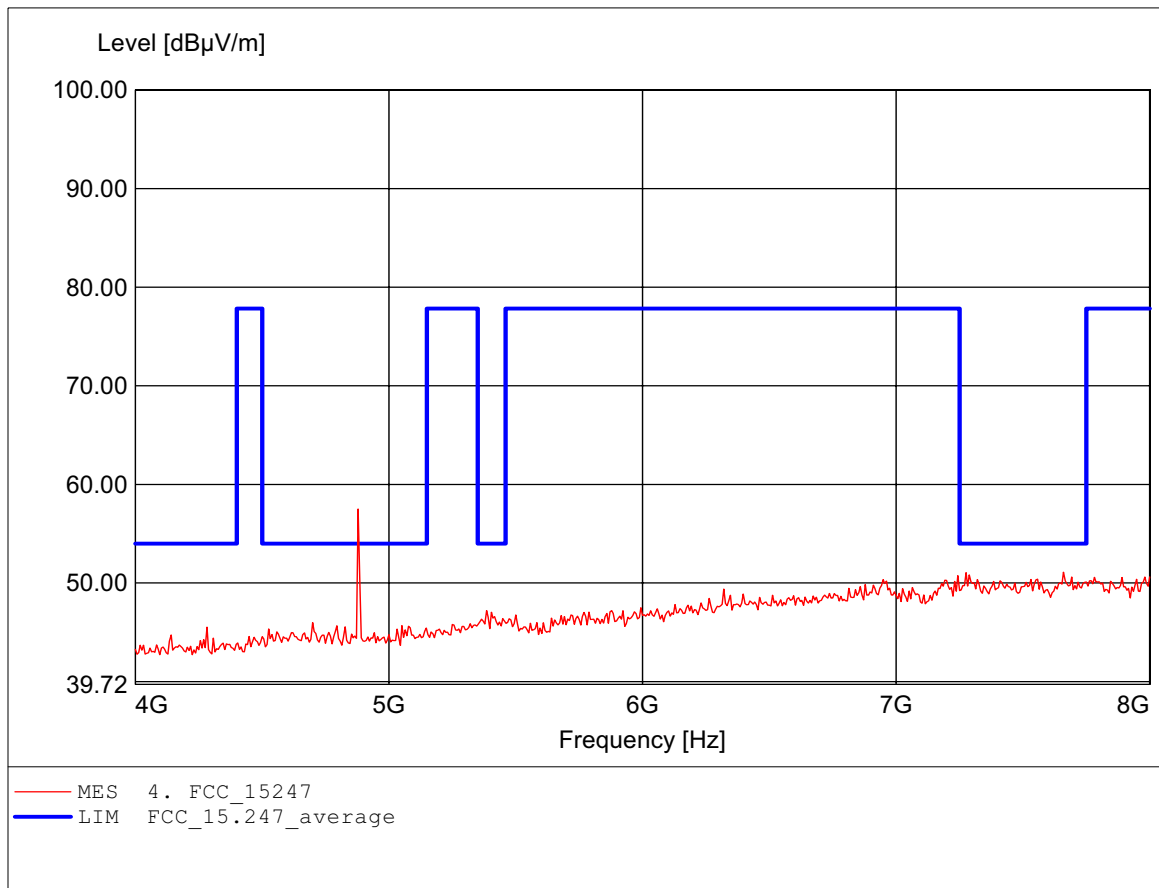


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.878GHz, Emax: 55.82dBμV/m, RBW: 1MHz

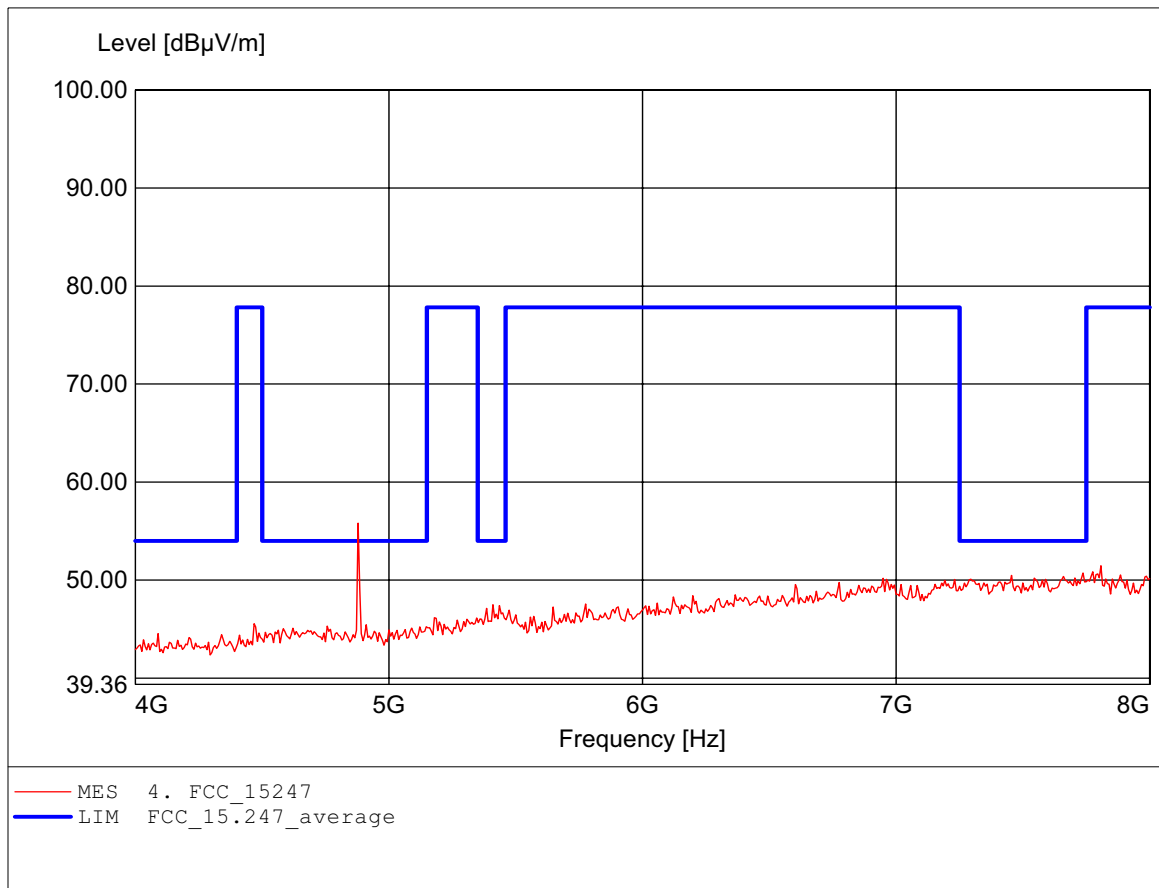


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.571GHz, Emax: 46.63dBµV/m, RBW: 1MHz

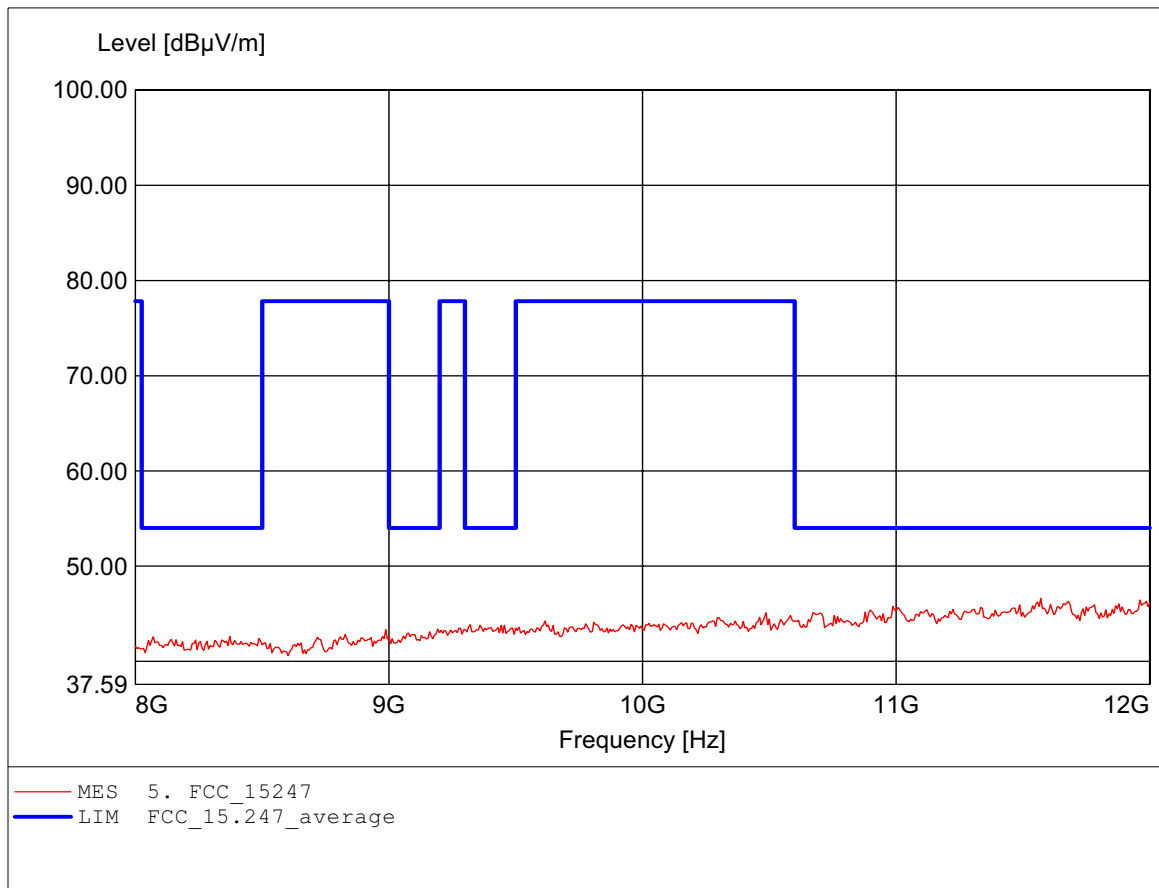


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.994GHz, Emax: 46.91dBμV/m, RBW: 1MHz

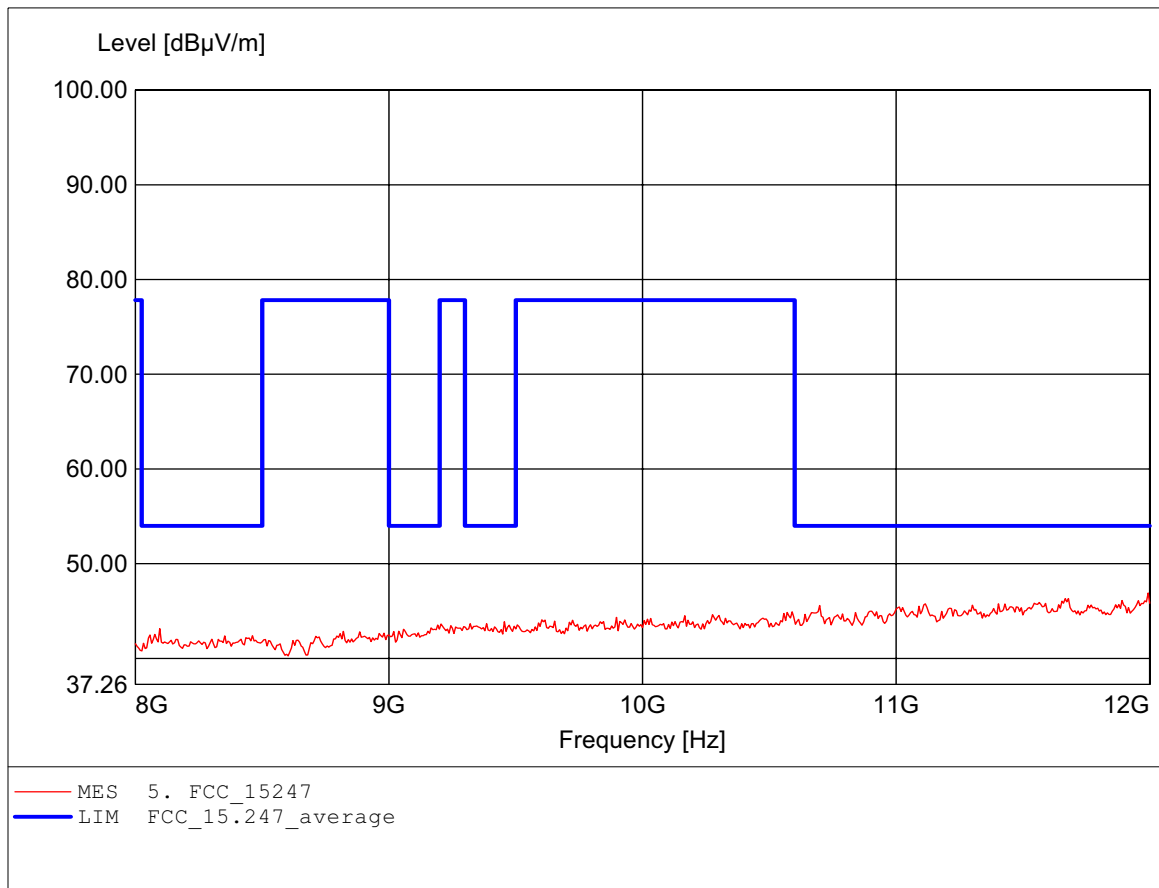

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 16.846GHz, Emax: 49.71dBµV/m, RBW: 1MHz

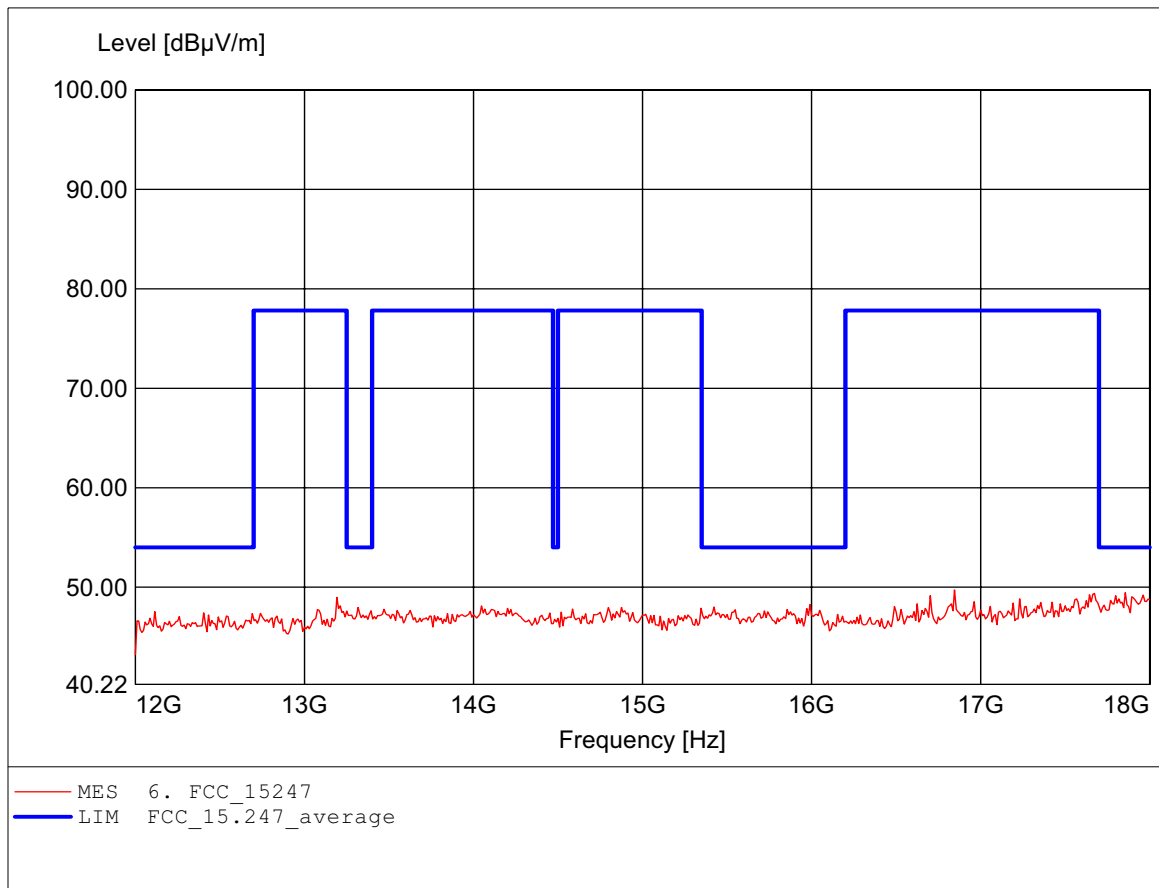

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.606GHz, Emax: 49.40dBμV/m, RBW: 1MHz

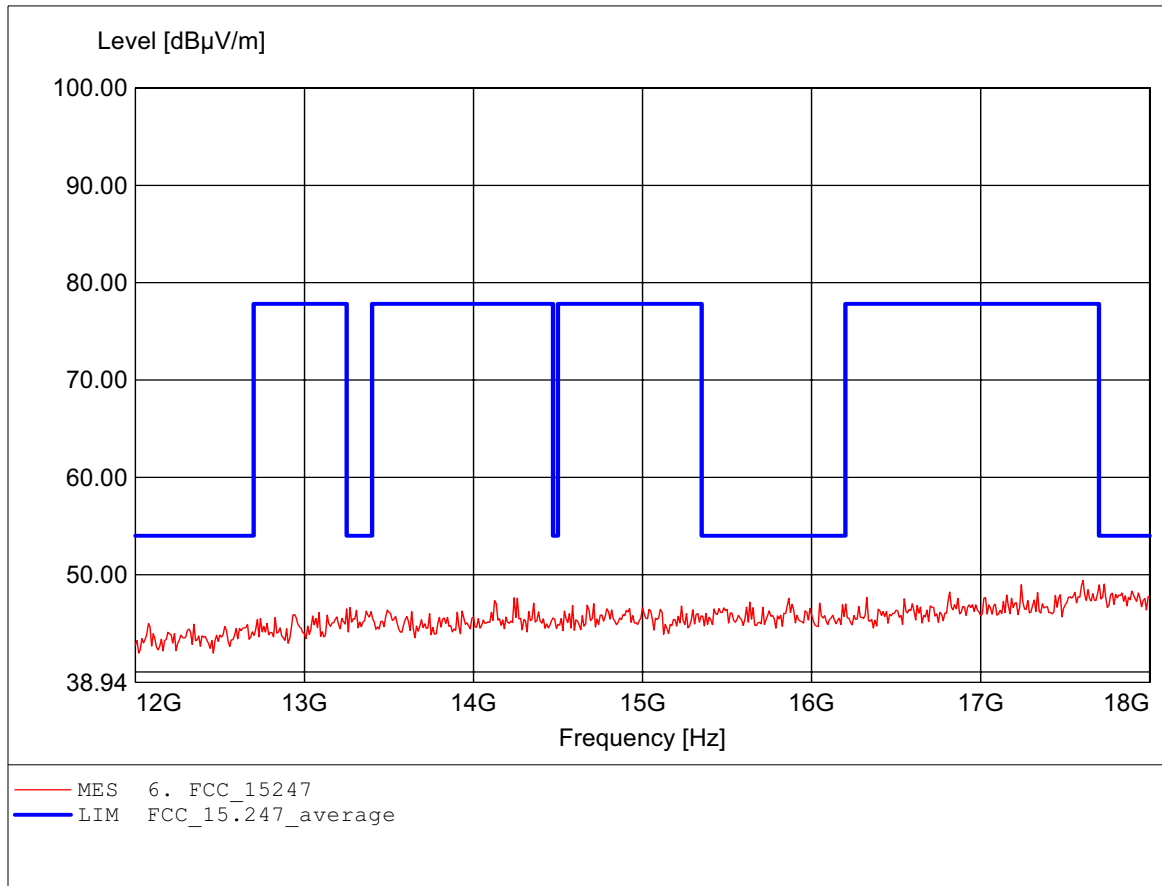


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.459GHz, Emax: 51.50dBμV/m, RBW: 1MHz

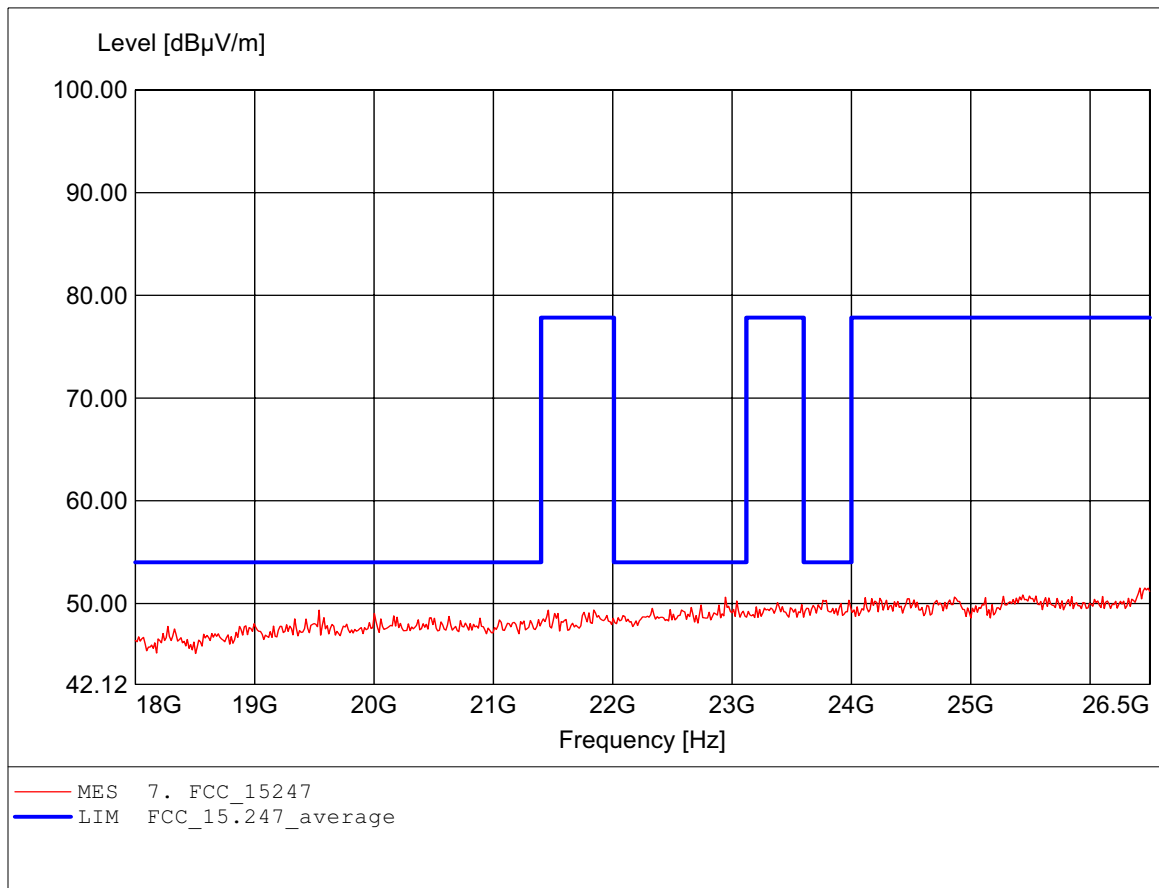

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 25.410GHz, Emax: 51.54dBμV/m, RBW: 1MHz

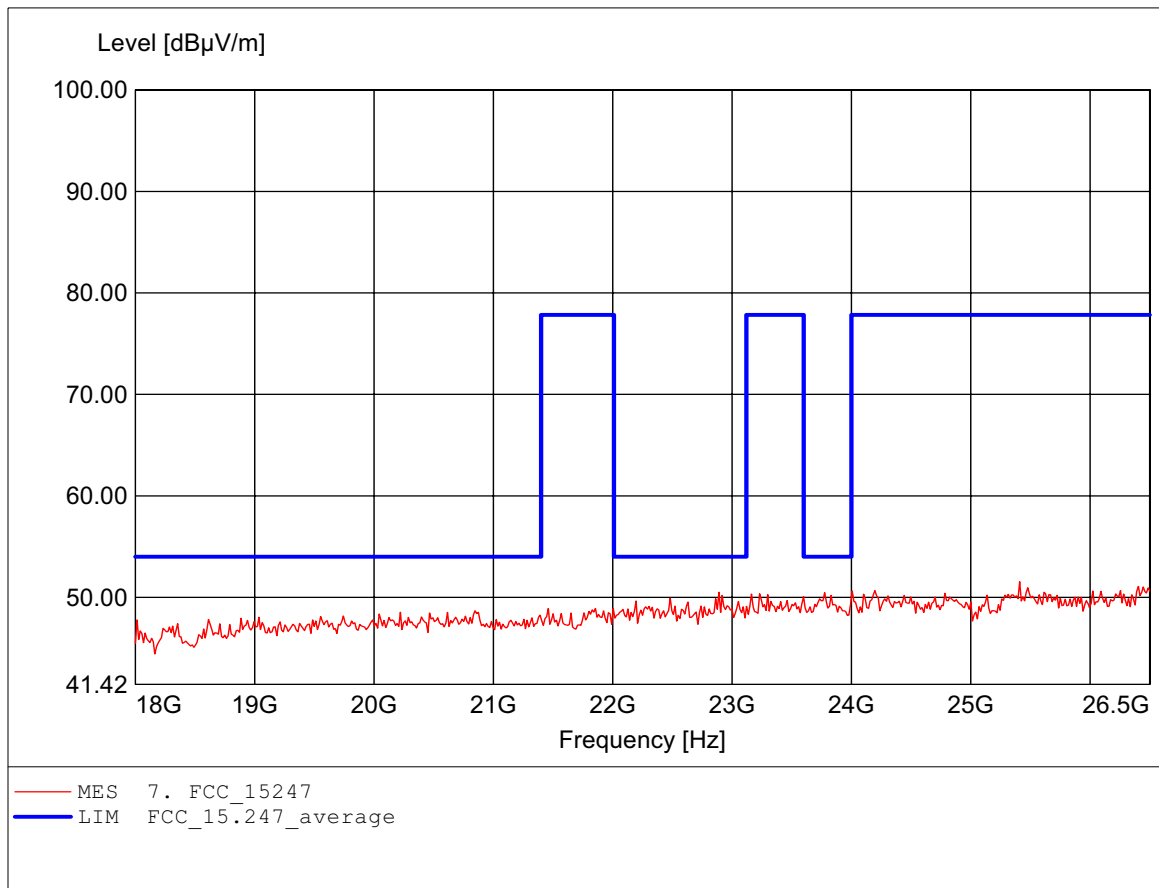

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 196.458MHz, Emax: 35.13dBμV/m, RBW: 100kHz

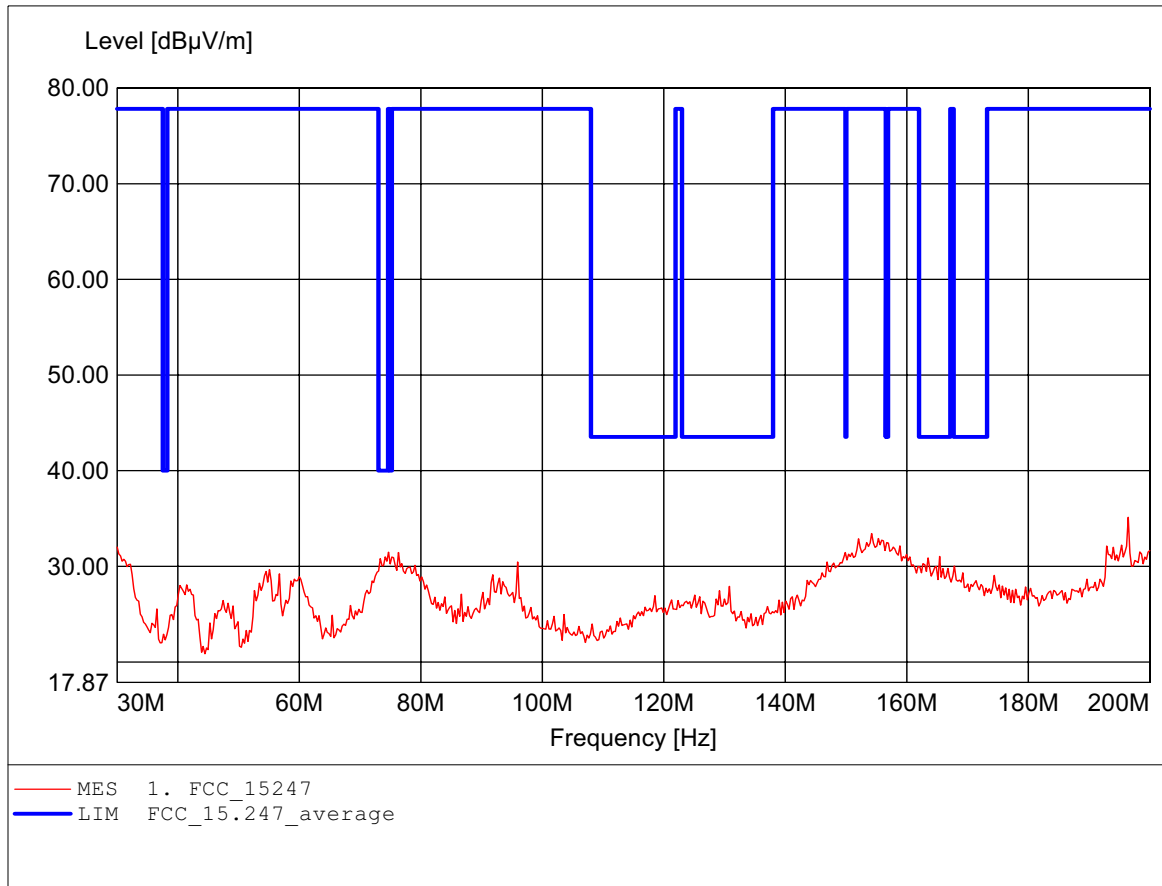

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Freq: 30.272MHz, Emax: 43.00dBµV/m, RBW: 100kHz

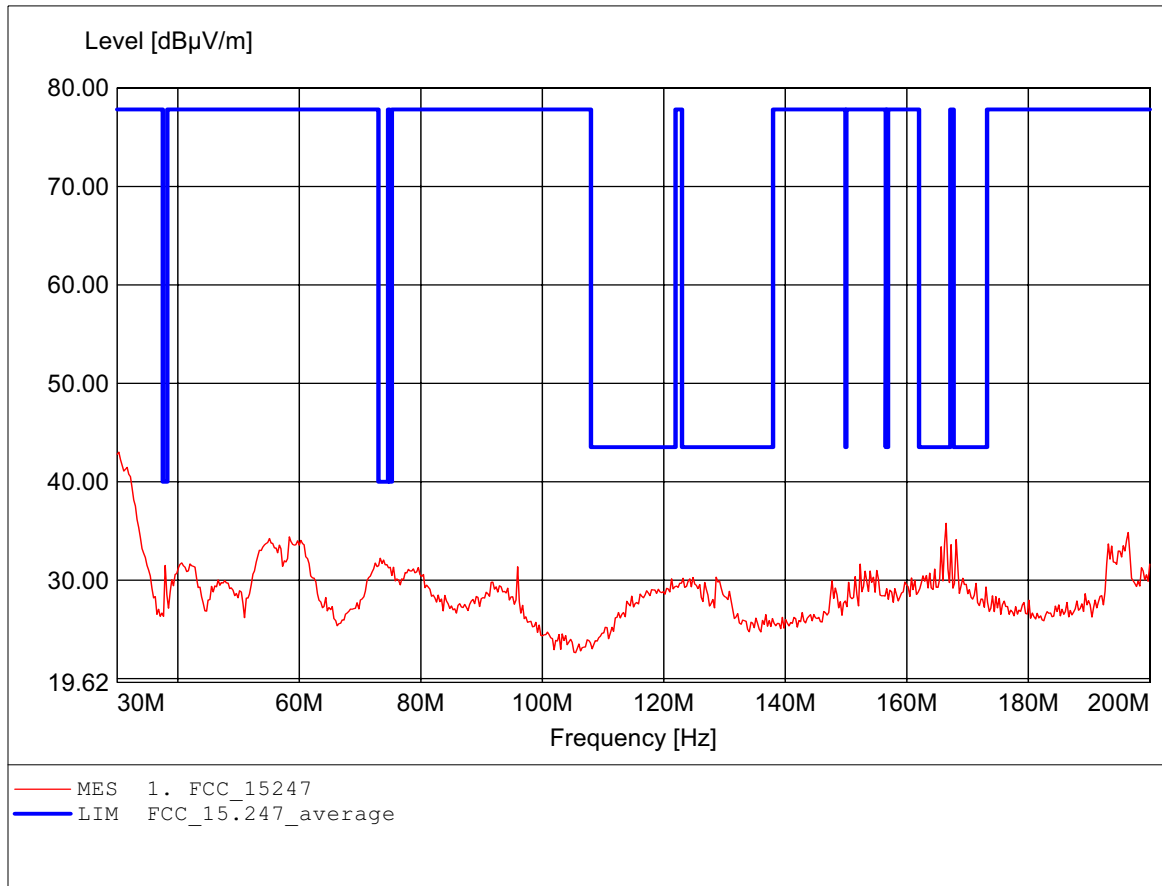

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 891.026MHz, Emax: 47.14dBµV/m, RBW: 100kHz

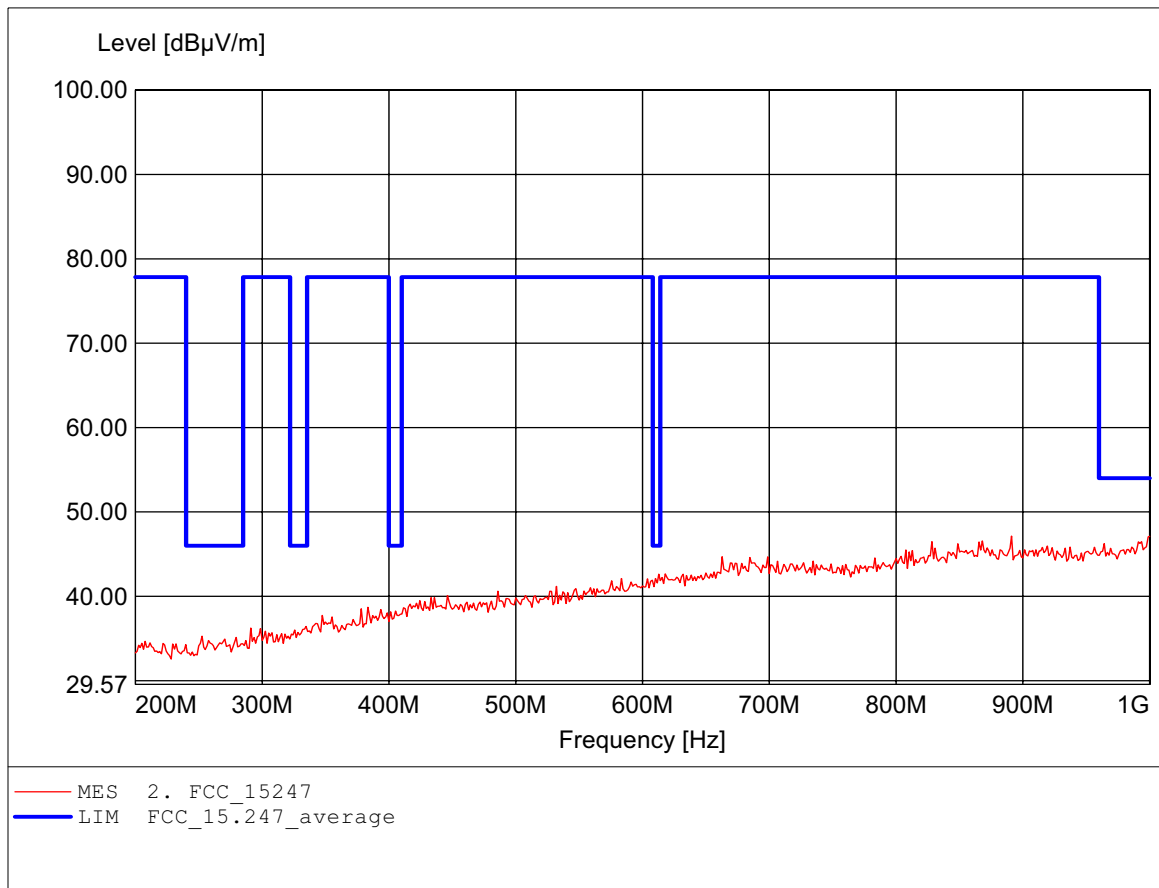

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223,
Freq: 960.256MHz, Emax: 46.72dBμV/m, RBW: 100kHz

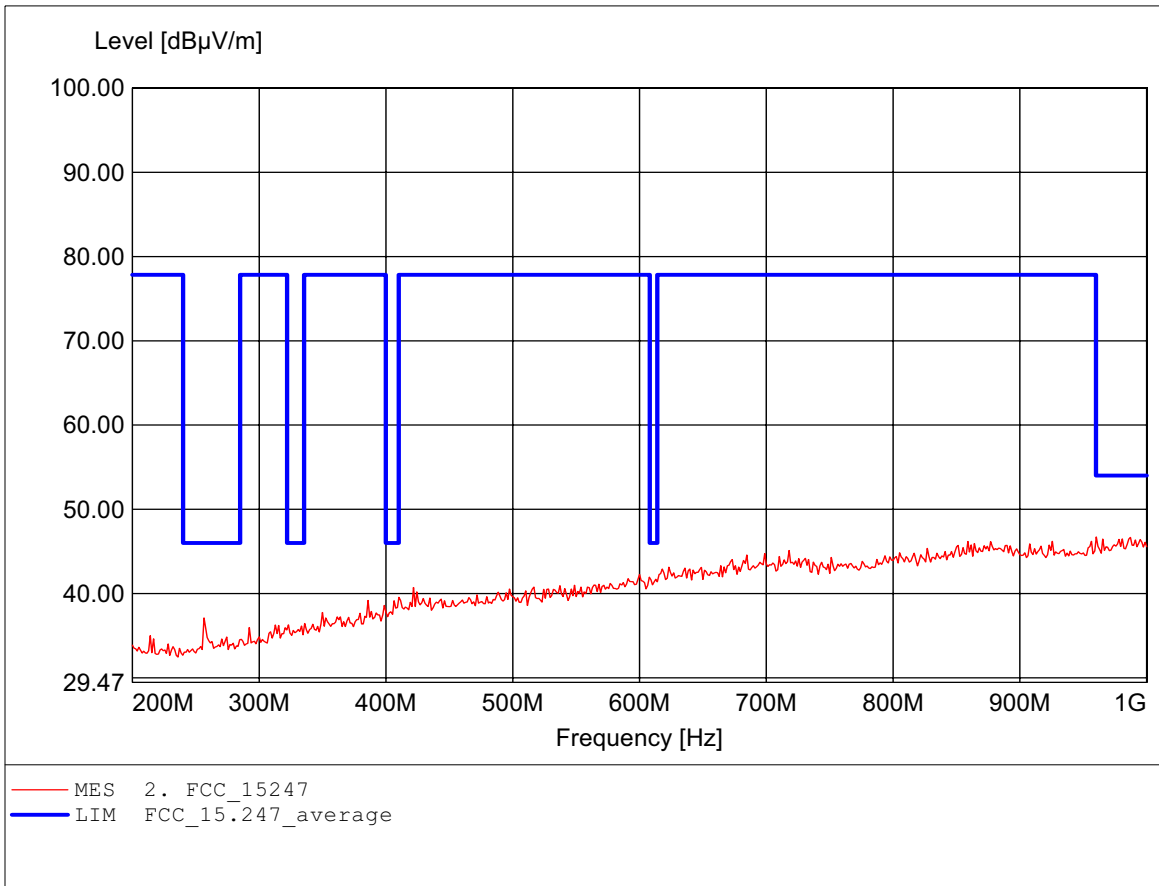

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 1.654GHz, Emax: 53.01dBμV/m, RBW: 1MHz

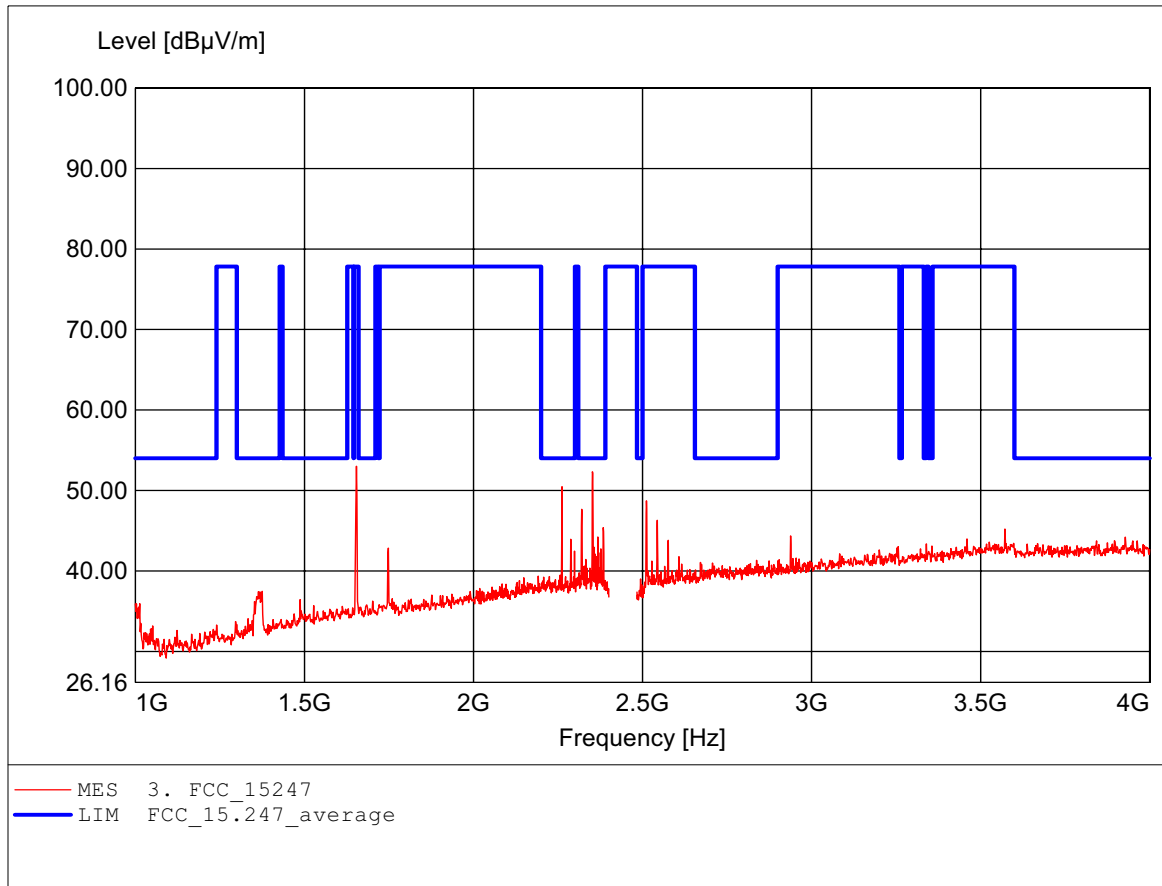

Spurious emissions Field Strength


FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 2.352GHz, Emax: 49.57dBμV/m, RBW: 1MHz

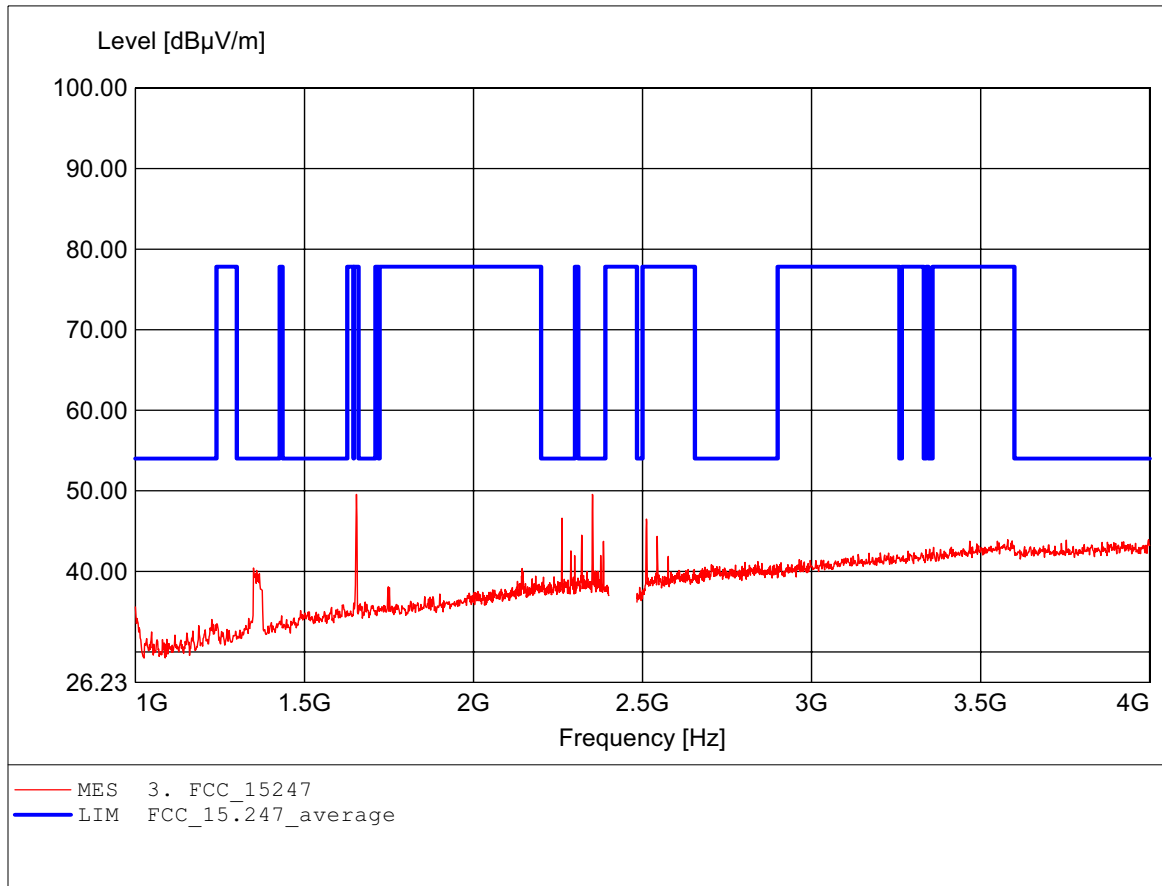


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.955GHz, Emax: 52.35dBμV/m, RBW: 1MHz

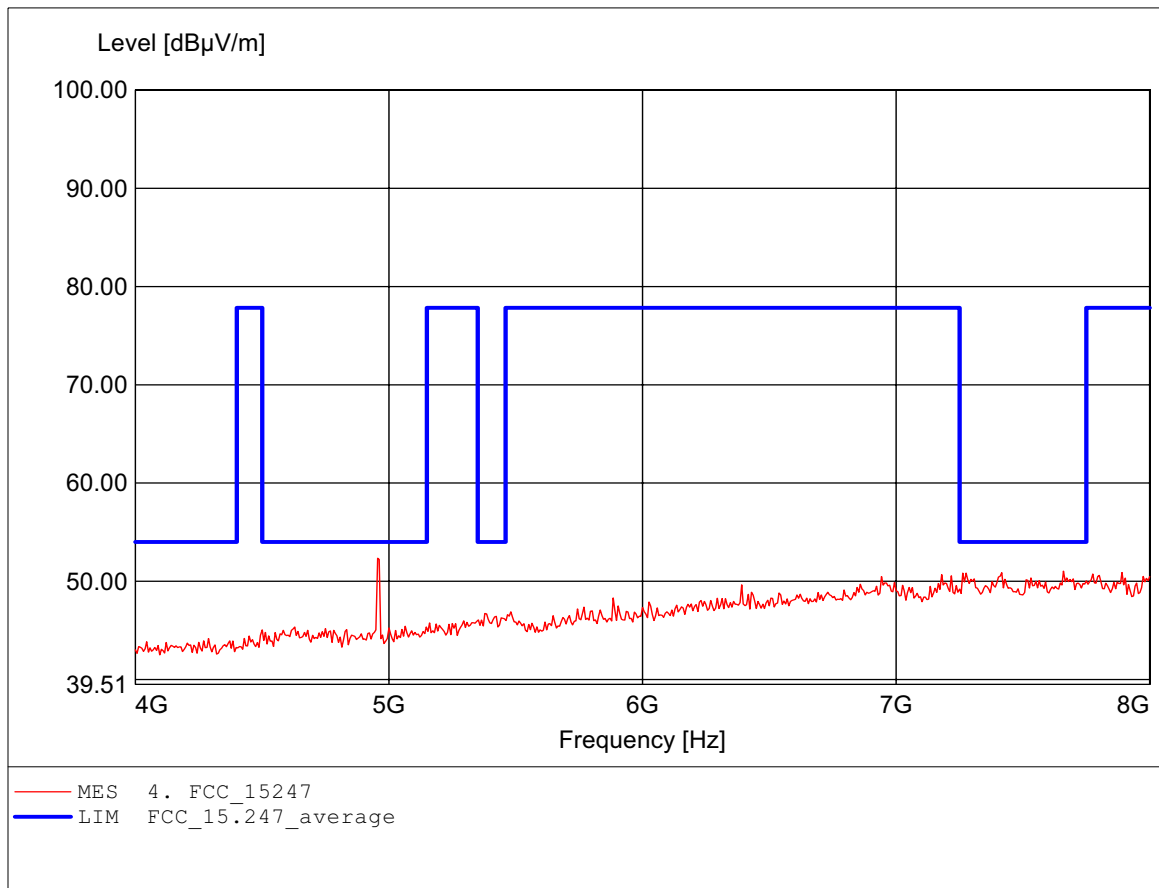


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 4.955GHz, Emax: 54.19dBμV/m, RBW: 1MHz

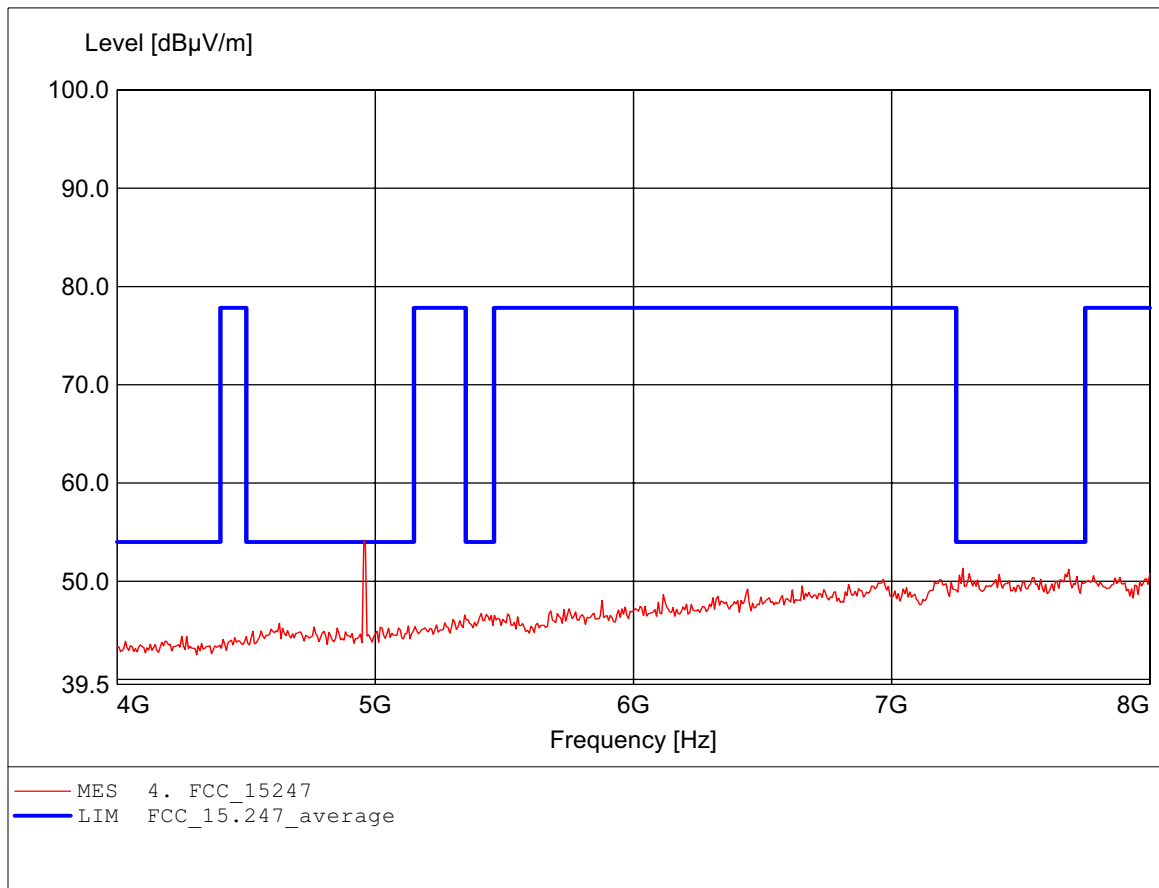


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.962GHz, Emax: 46.93dBµV/m, RBW: 1MHz

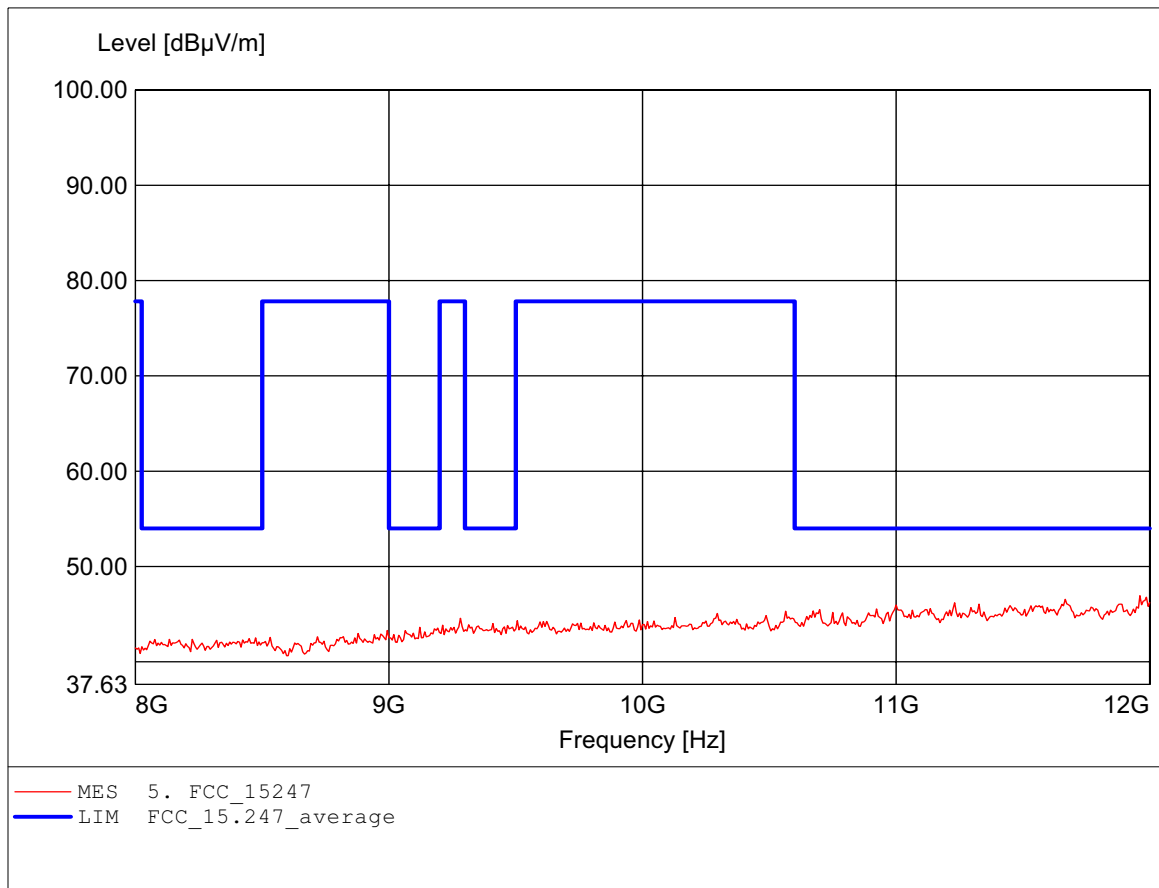


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 11.551GHz, Emax: 46.96dBμV/m, RBW: 1MHz

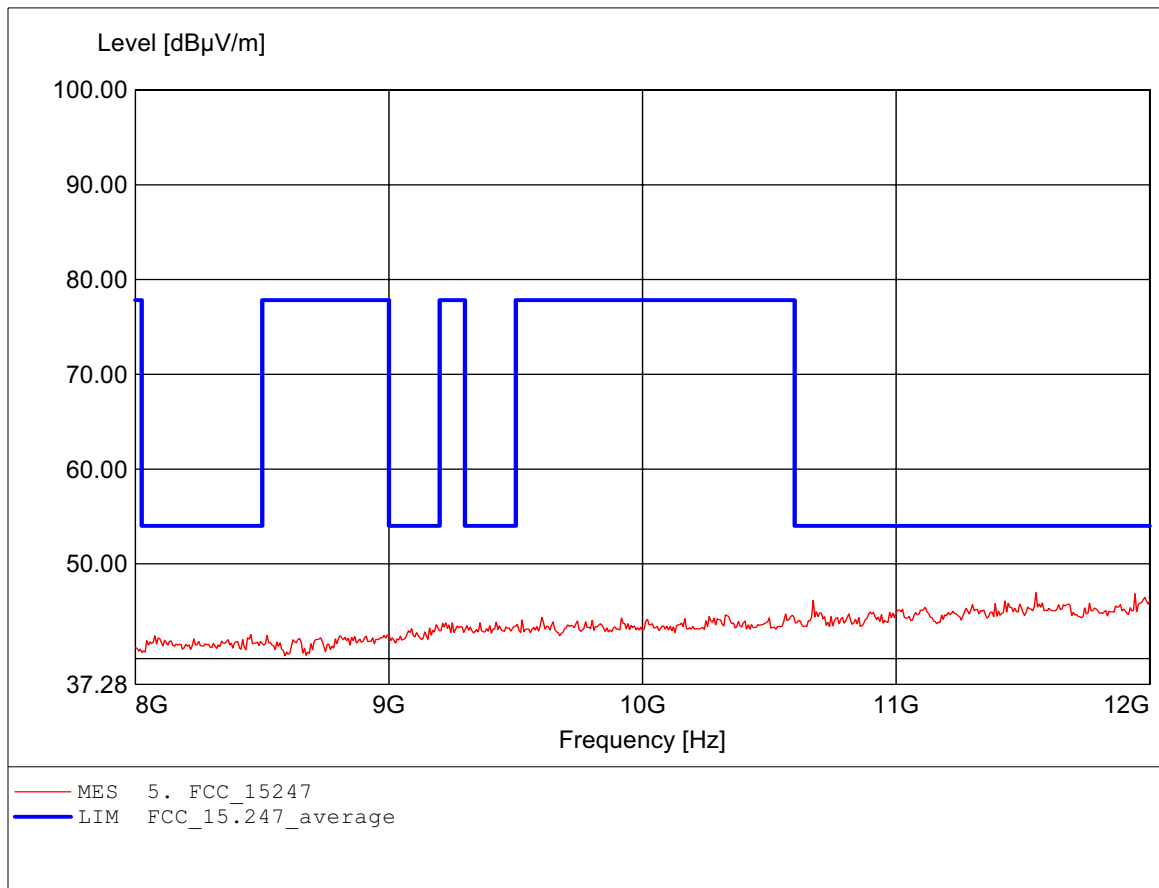


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.692GHz, Emax: 49.23dBµV/m, RBW: 1MHz

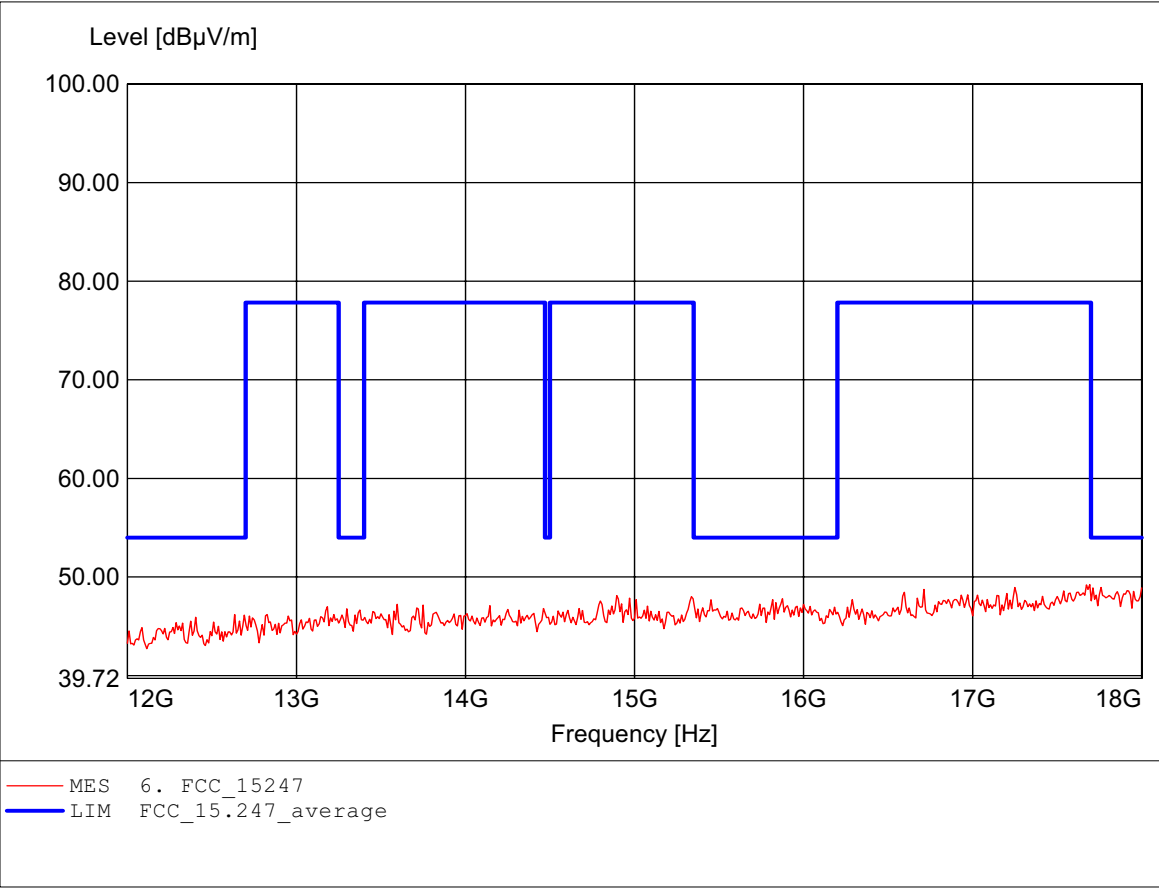


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Freq: 17.971GHz, Emax: 50.02dBµV/m, RBW: 1MHz

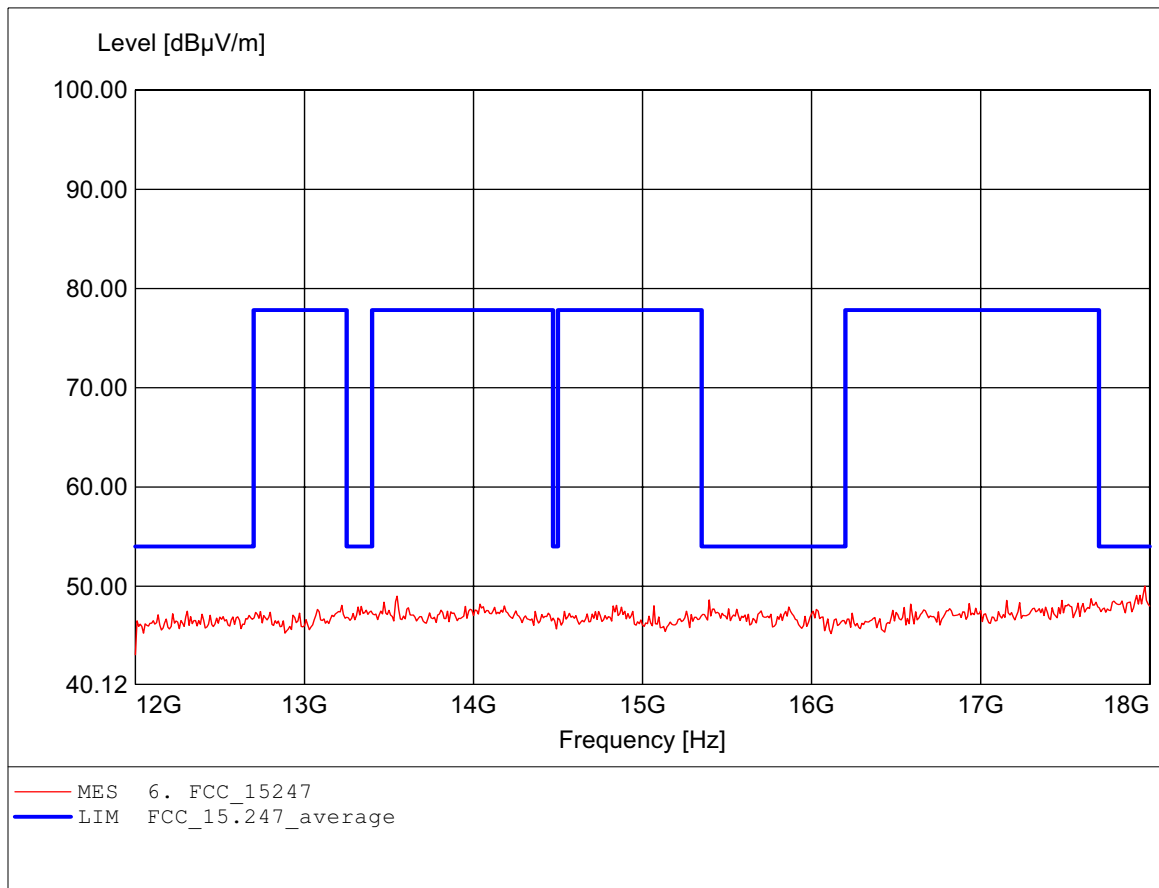


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 26.446GHz, Emax: 52.23dBμV/m, RBW: 1MHz

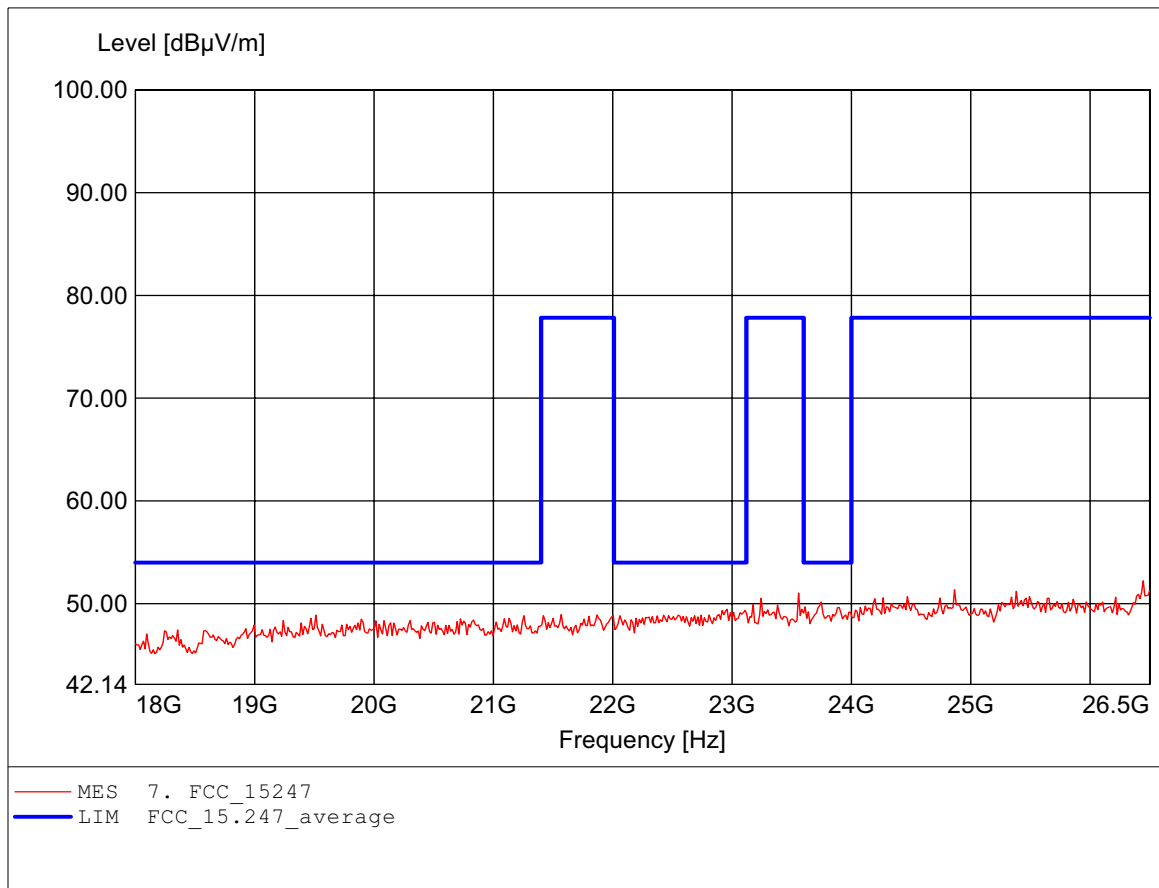

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C / LP0002


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Freq: 25.465GHz, Emax: 51.43dBµV/m, RBW: 1MHz

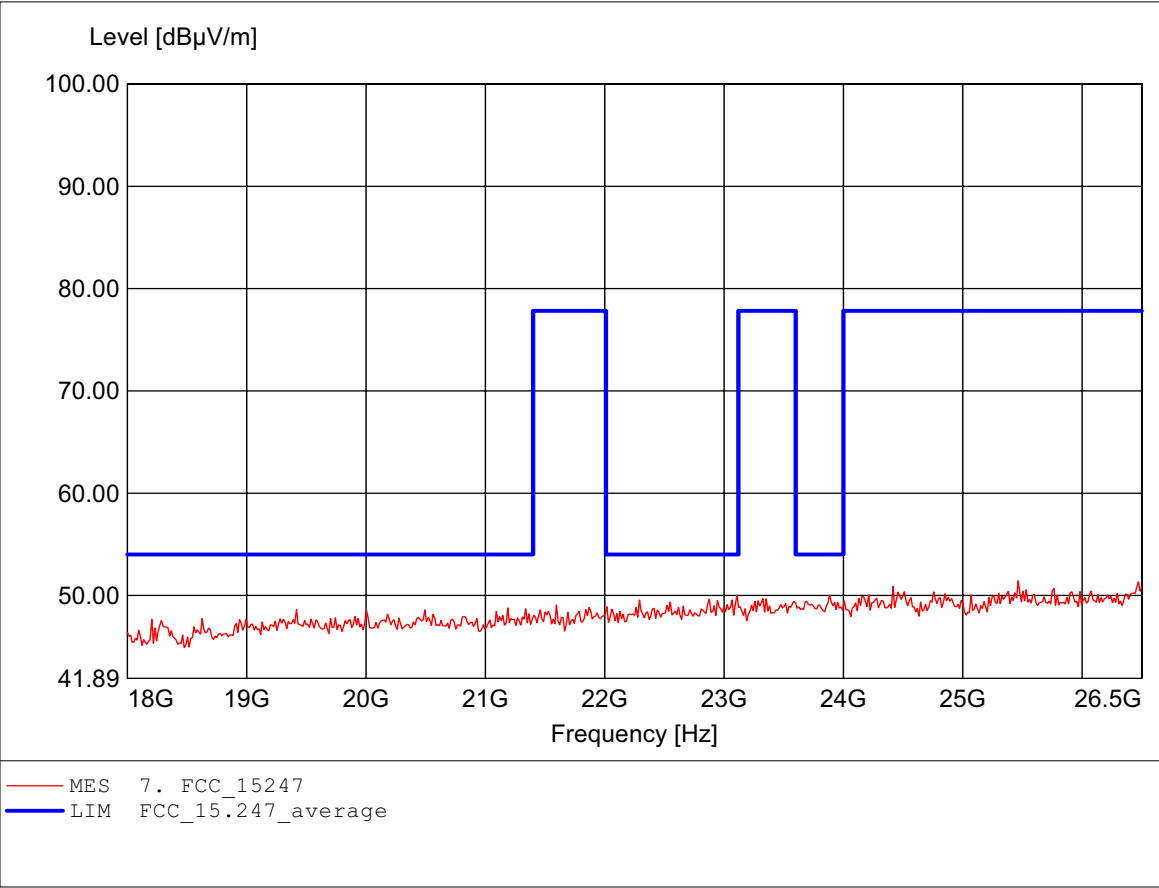

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41

Appendix C

Carrier Frequency Separation

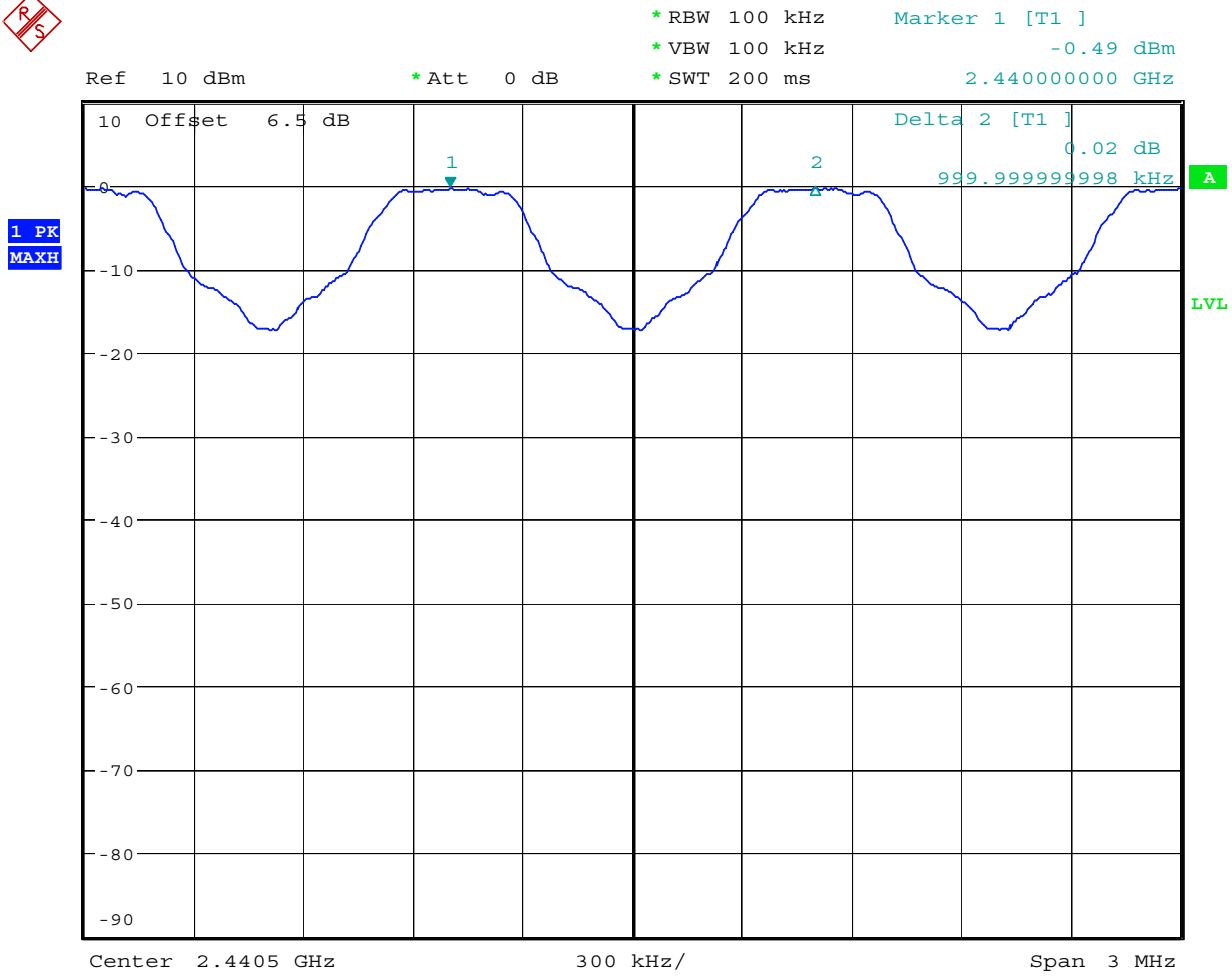


FREQUENCY SEPARATION CH38 AND CH39

Date: 26.OCT.2006 08:31:52

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41


Appendix D

Number of Hopping Frequencies

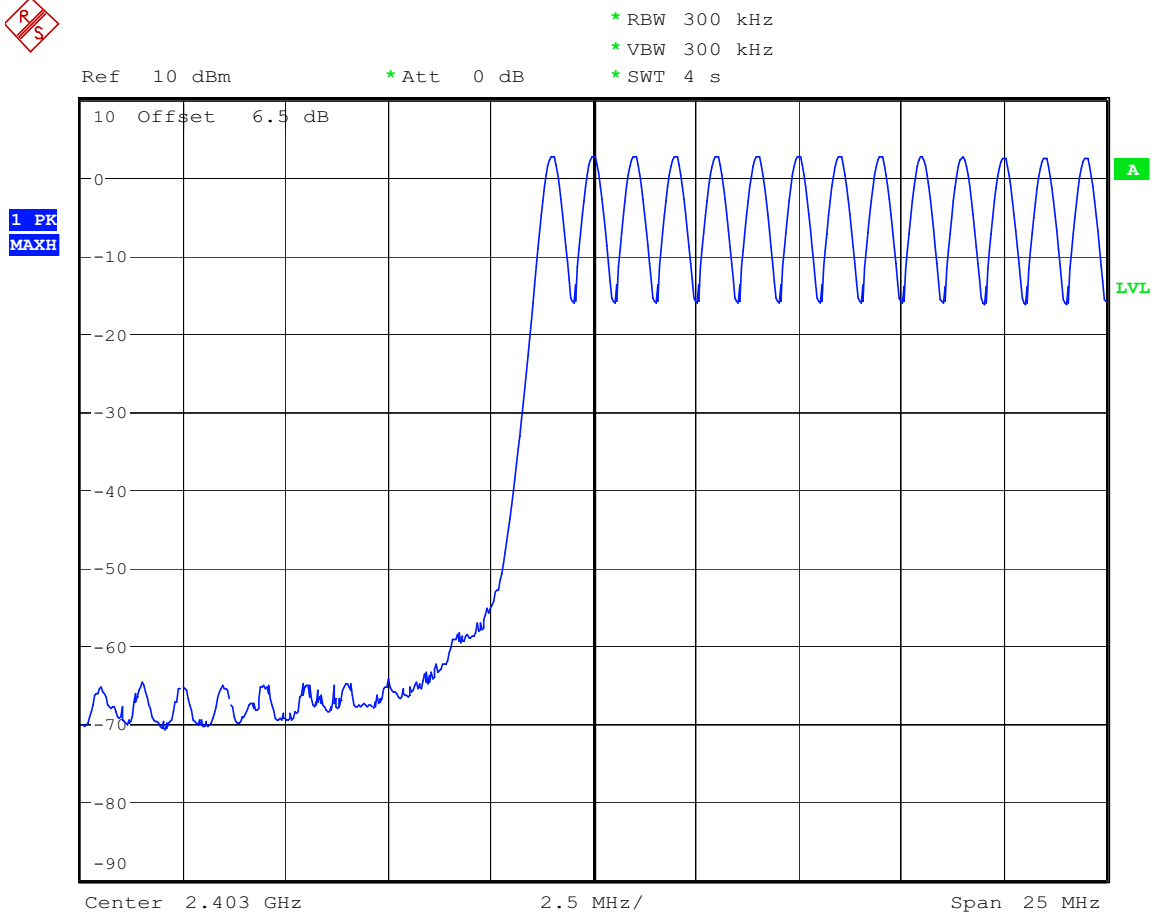


NMBR OF HOPPING RNCIS (CH 0 ~13)

Date: 26.OCT.2006 15:09:17

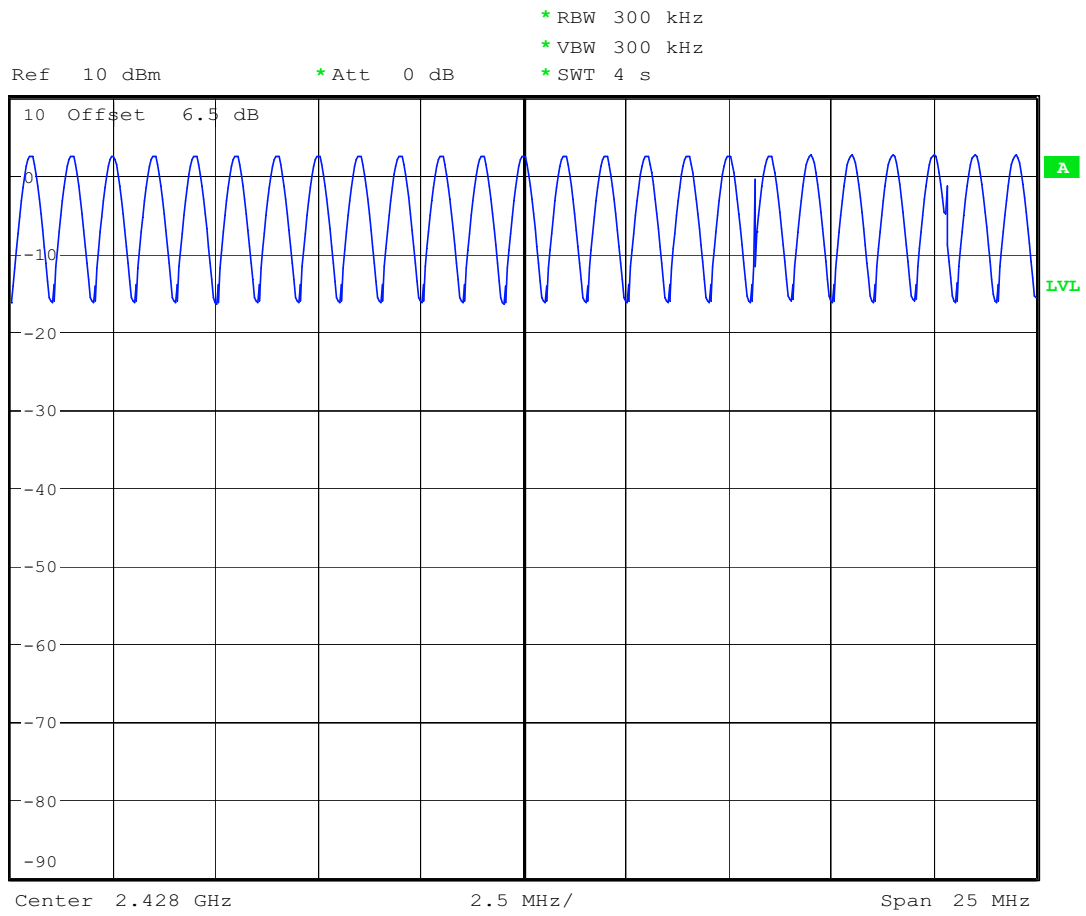


NMBR OFHOPPING RNCIS (CH 14 ~38)

Date: 26.OCT.2006 15:13:09

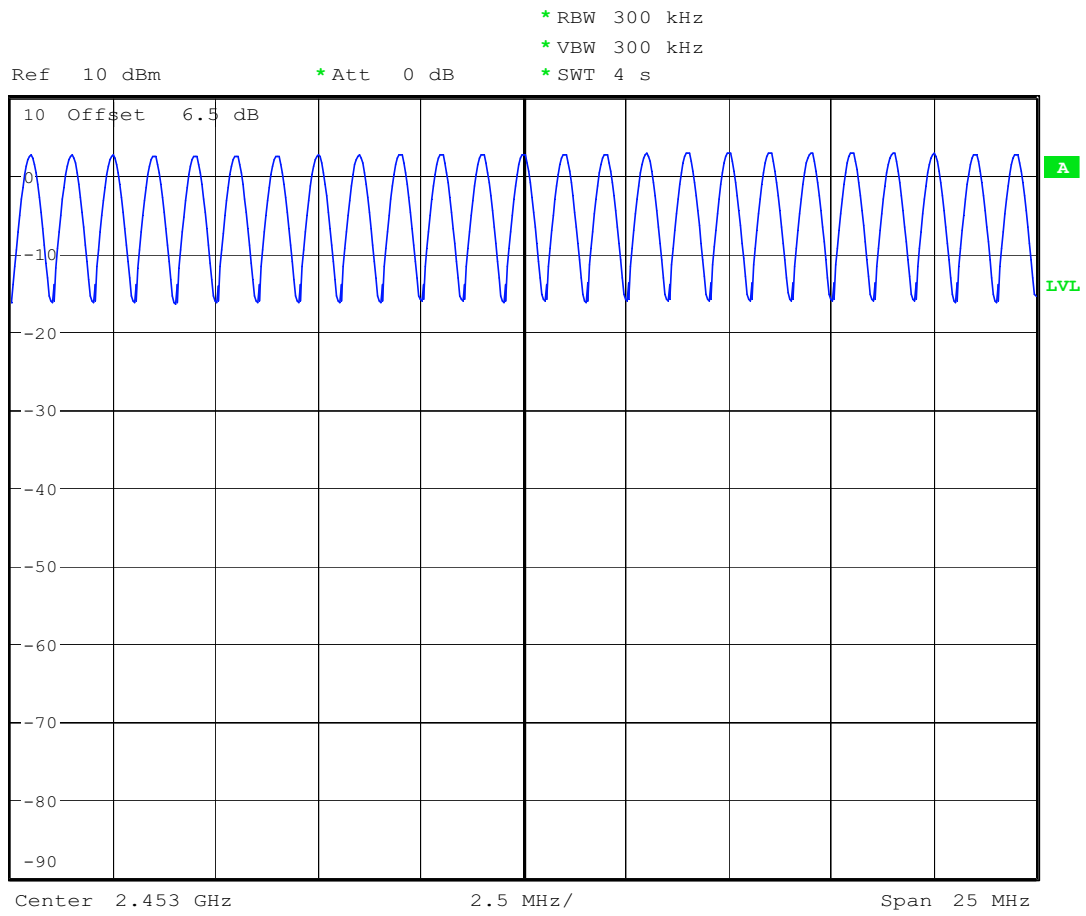

NMBR OFHOPPING RQICB (CH 39 ~63)

Date: 26.OCT.2006 15:15:51

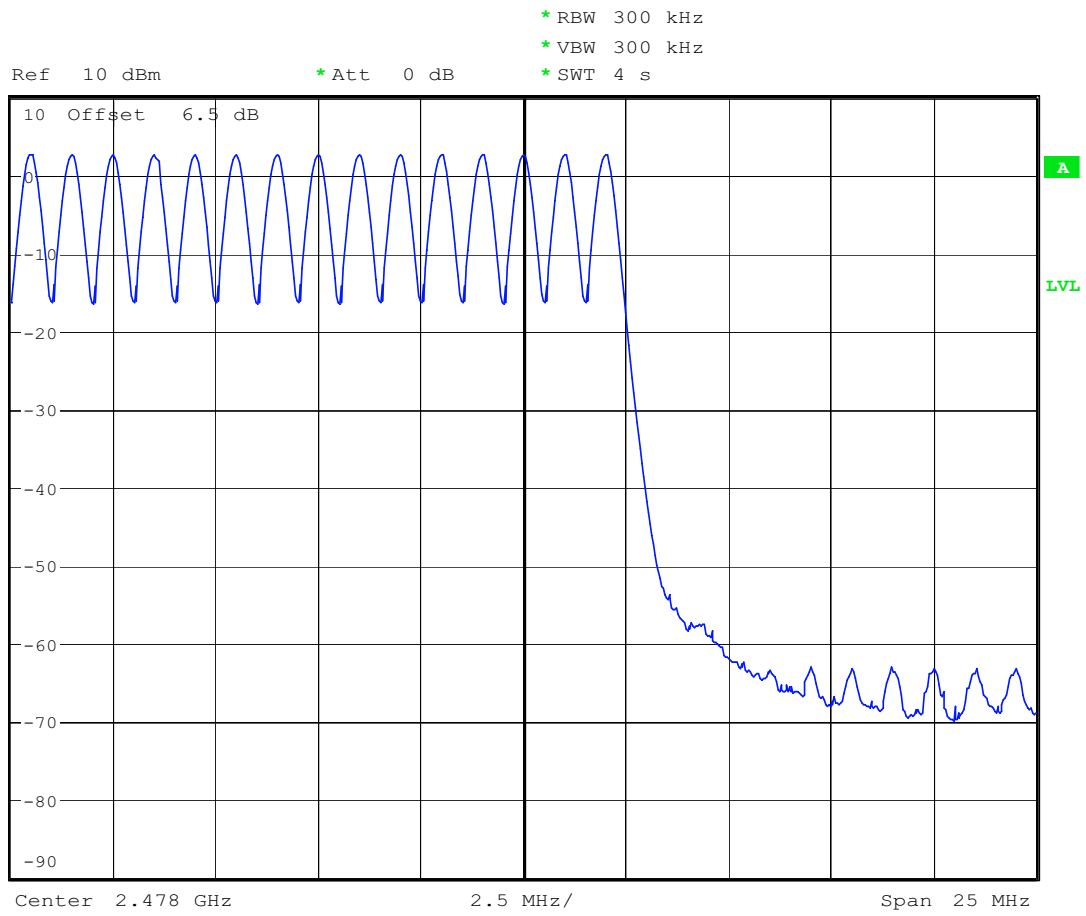


NMBR OF HOPPING R0CIB (CH 64 ~78)

Date: 26.OCT.2006 15:18:19

Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41

Appendix E

Time of Occupancy (Dwell Time)

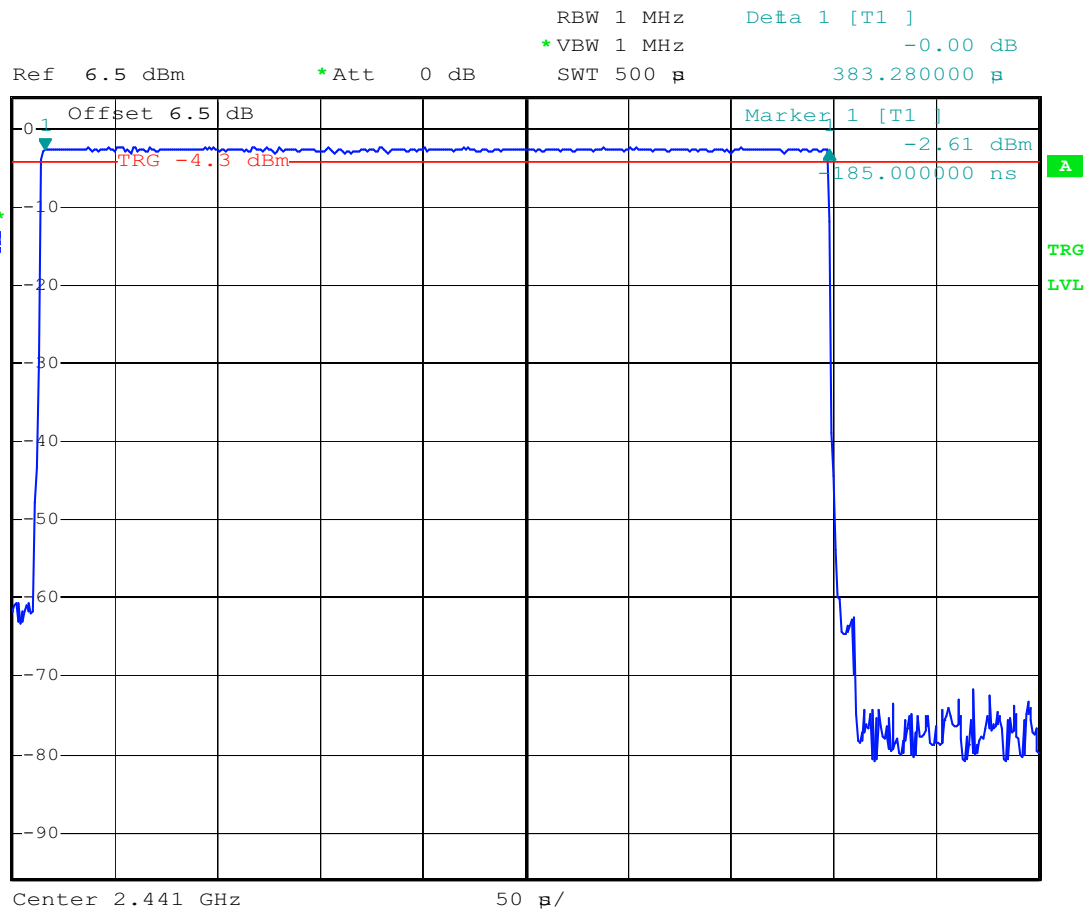

Time of day (H:p p m:GDH1)=383.28 μ s *312 events =119.583 ms

Date: 26.OCT.2006 14:32:41


Registration number: W6M20609-7424-P-15
FCC ID : T9JRN41

Appendix F

20dB Bandwidth



1 PK
MAXH

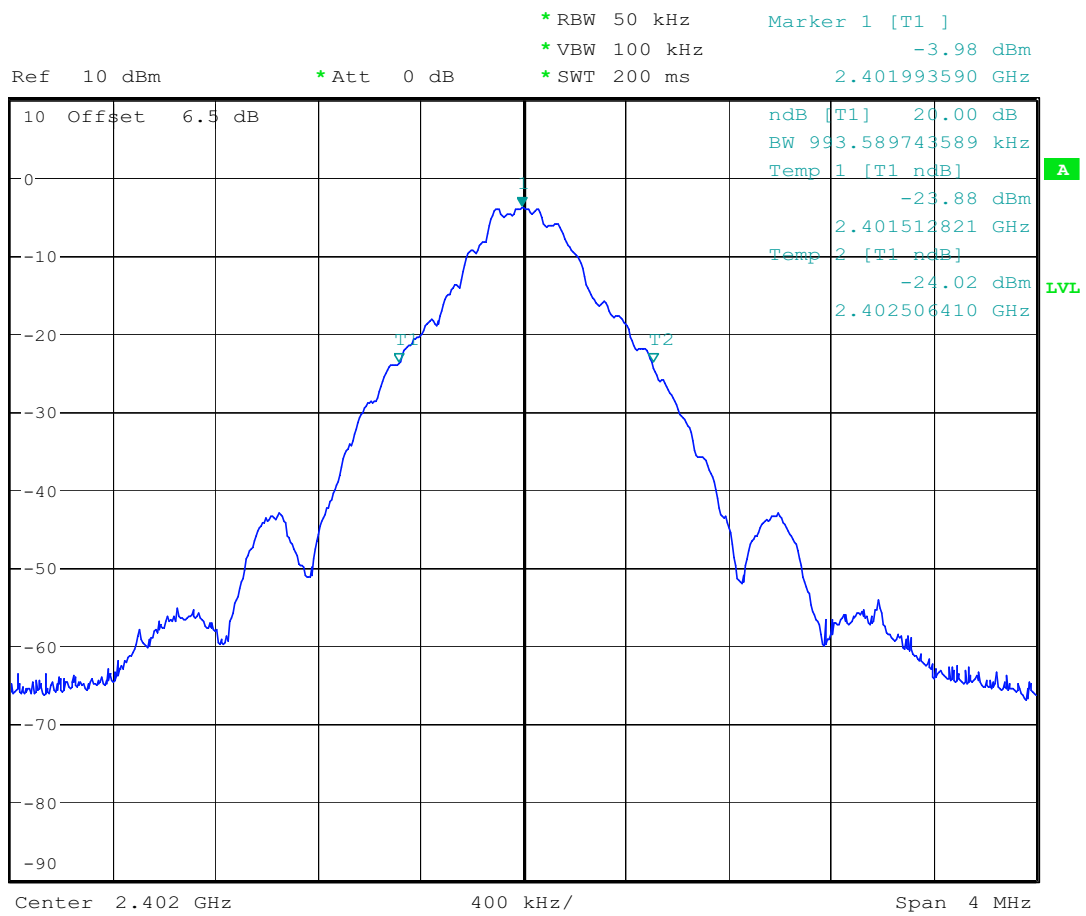


20 dB BANDWIDTH CH 0

Date: 26.OCT.2006 15:02:09



1 PK
MAXH

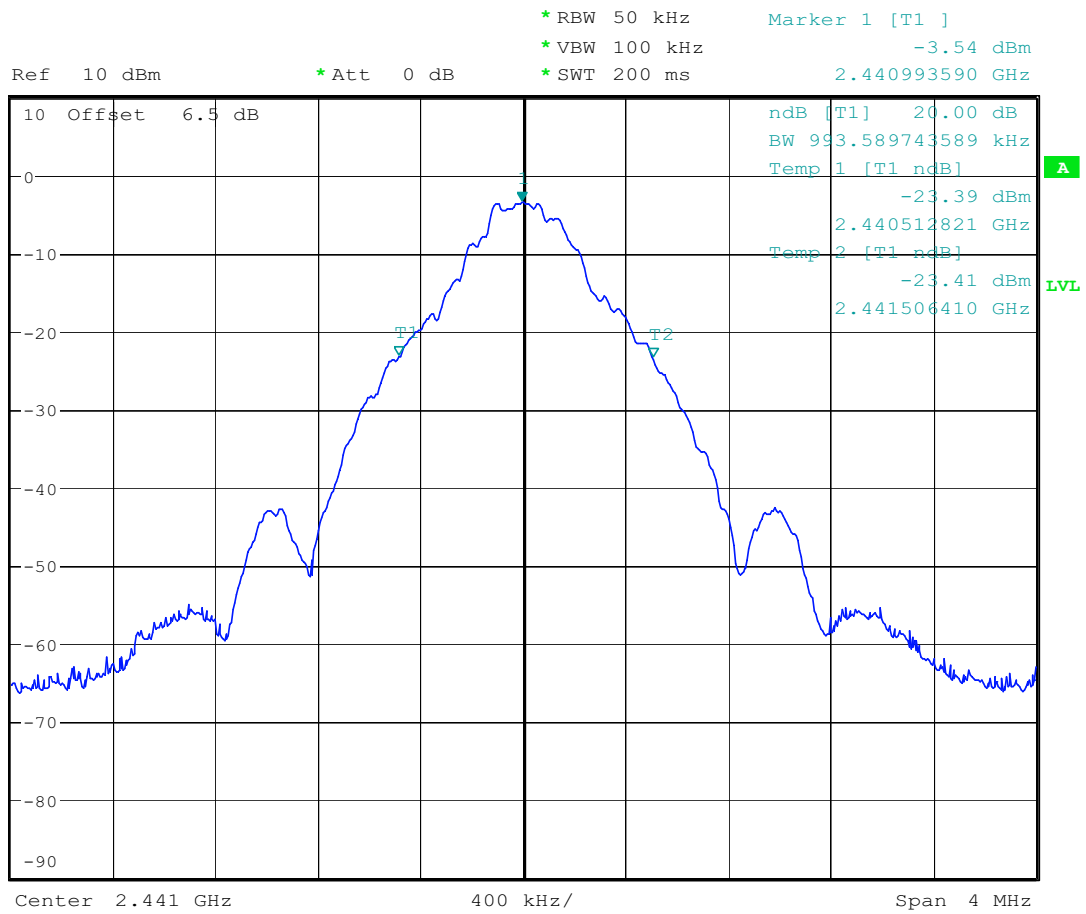


20 dB BANDWIDTH CH 39

Date: 26.OCT.2006 15:01:45




1 PK
MAXH

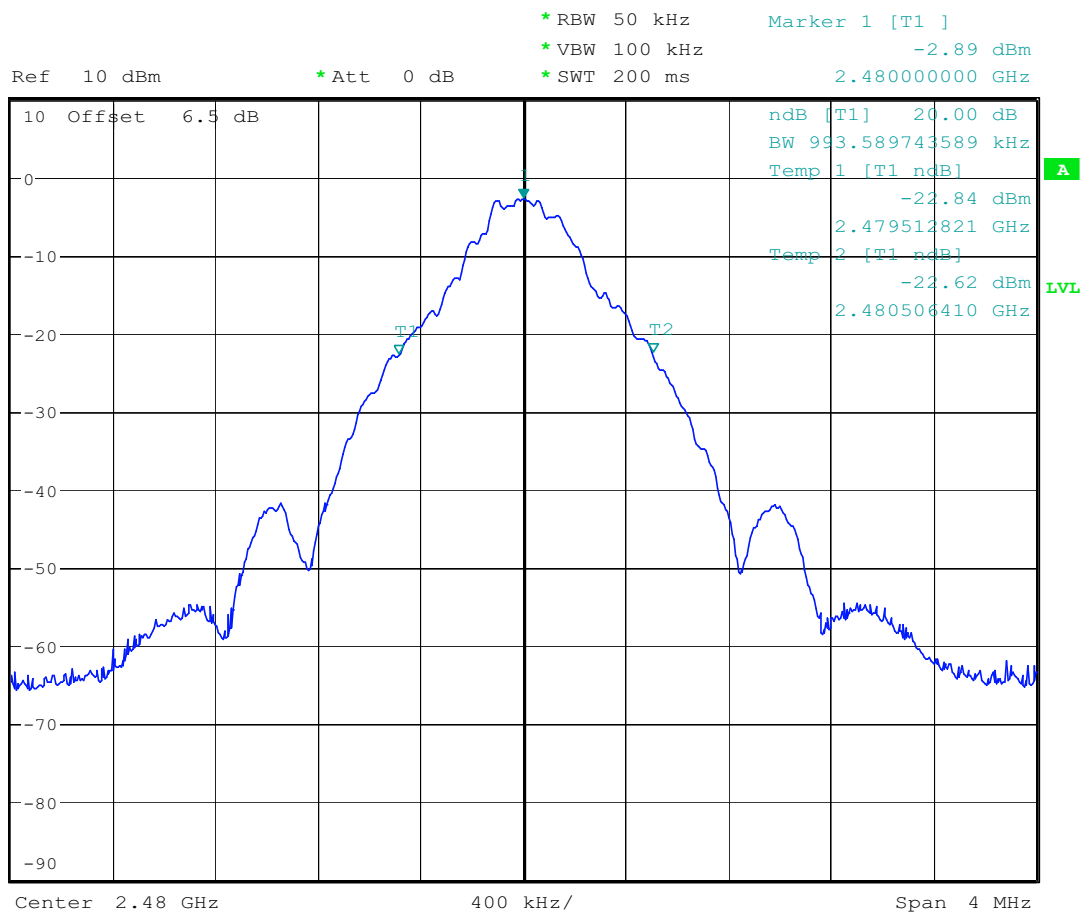

20 dB BANDWIDTH CH 78


Date: 26.OCT.2006 15:01:04

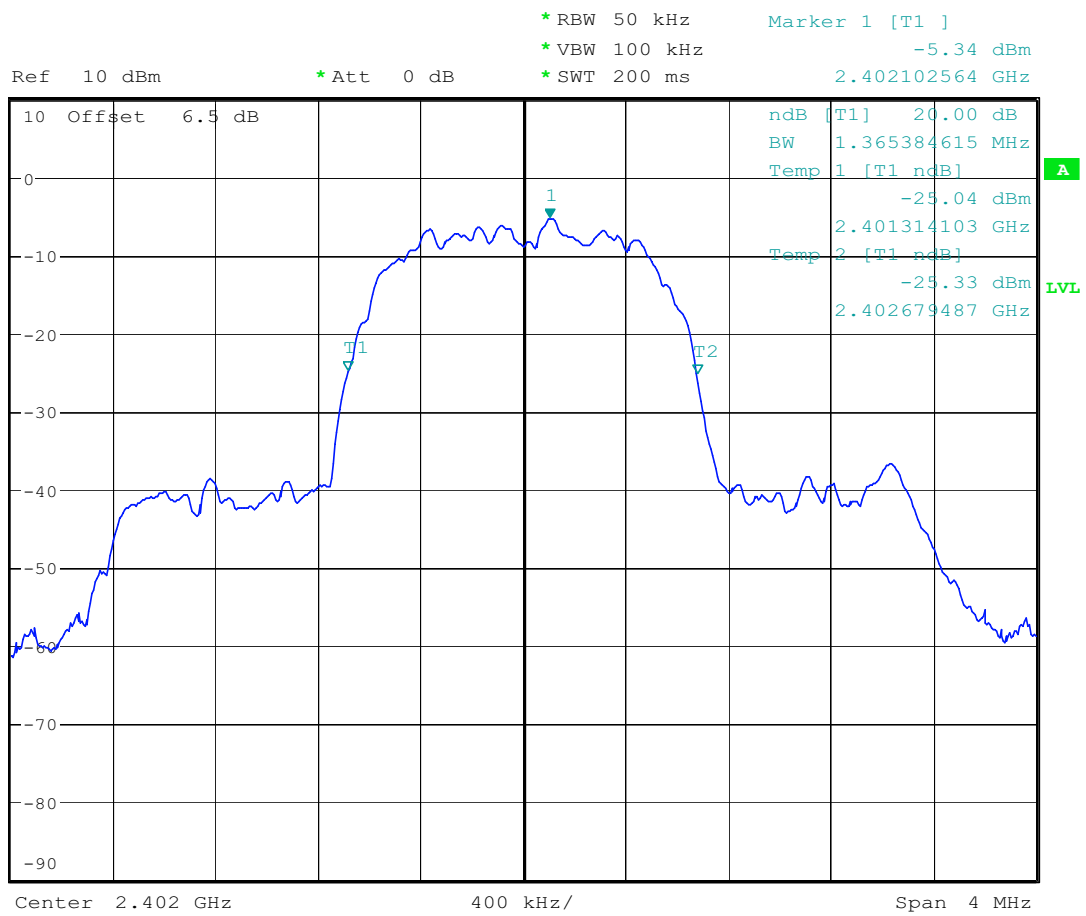

Date: 26.OCT.2006 15:06:32




1 PK
MAXH

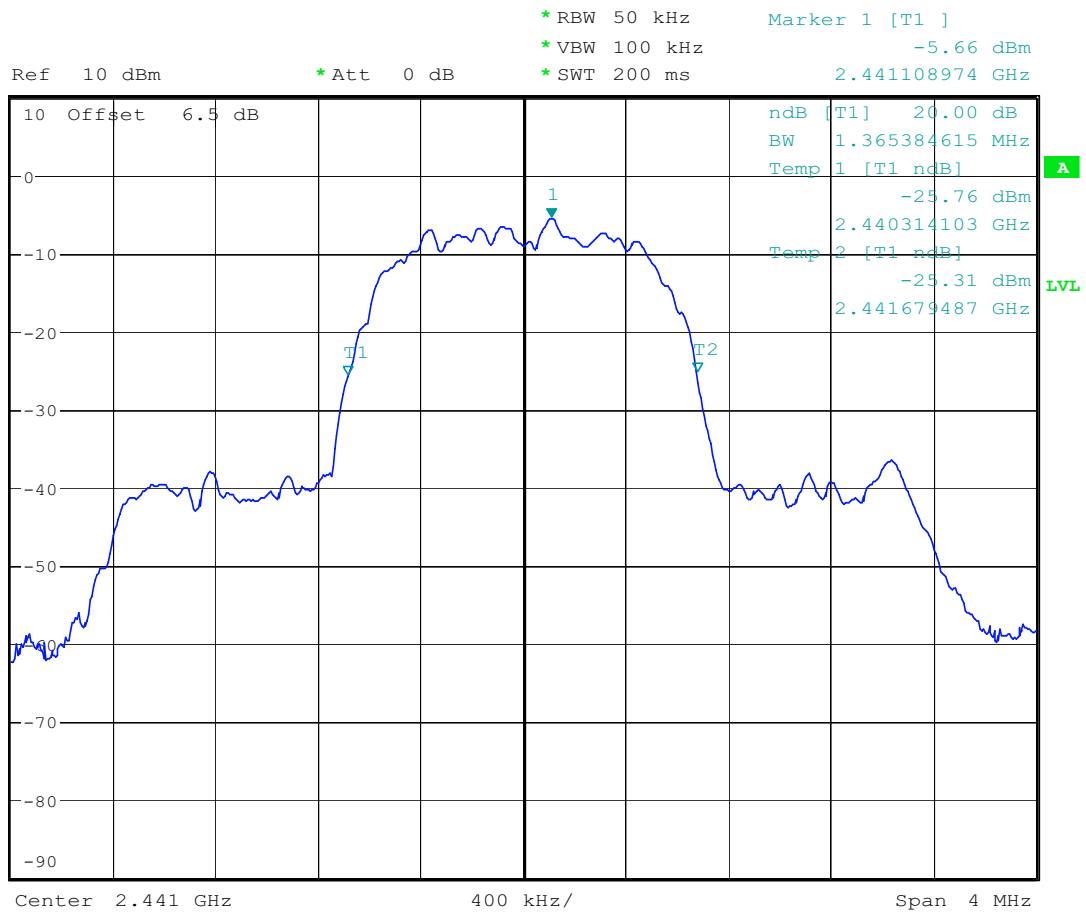

20 dB BANDWIDTH CH 39 EDR Mode

Date: 26.OCT.2006 15:07:06

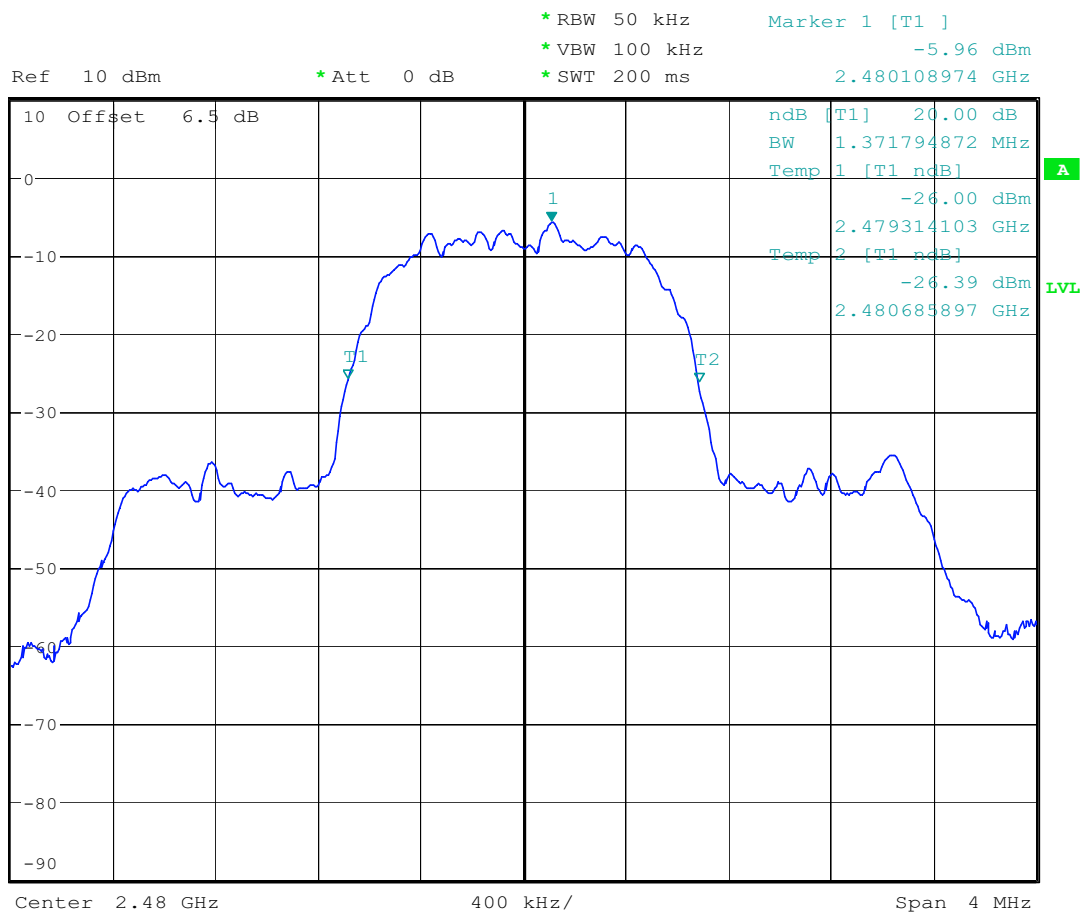


Date: 26.OCT.2006 15:07:43

Registration number: W6M20609-7424-P-15


FCC ID : T9JRN41

Appendix G

Band-edge Compliance of RF Conducted Emissions

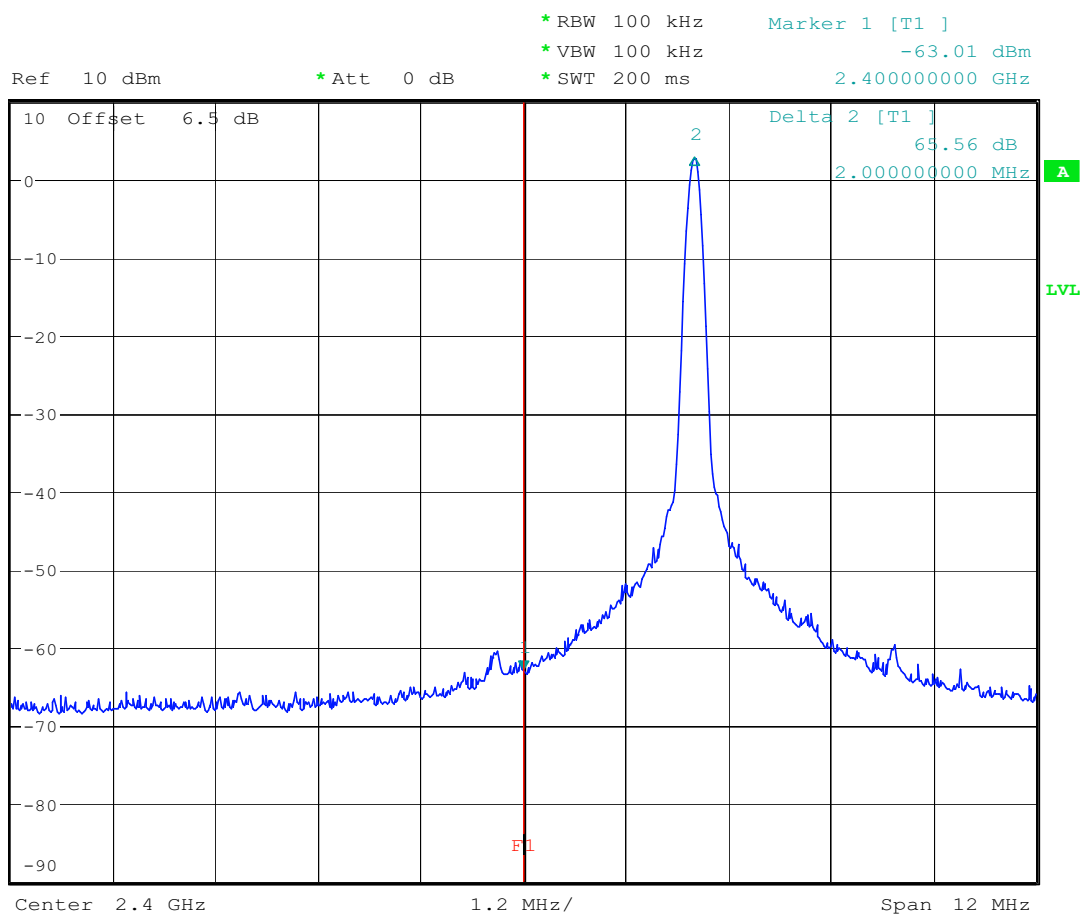


Date: 26.OCT.2006 14:56:47

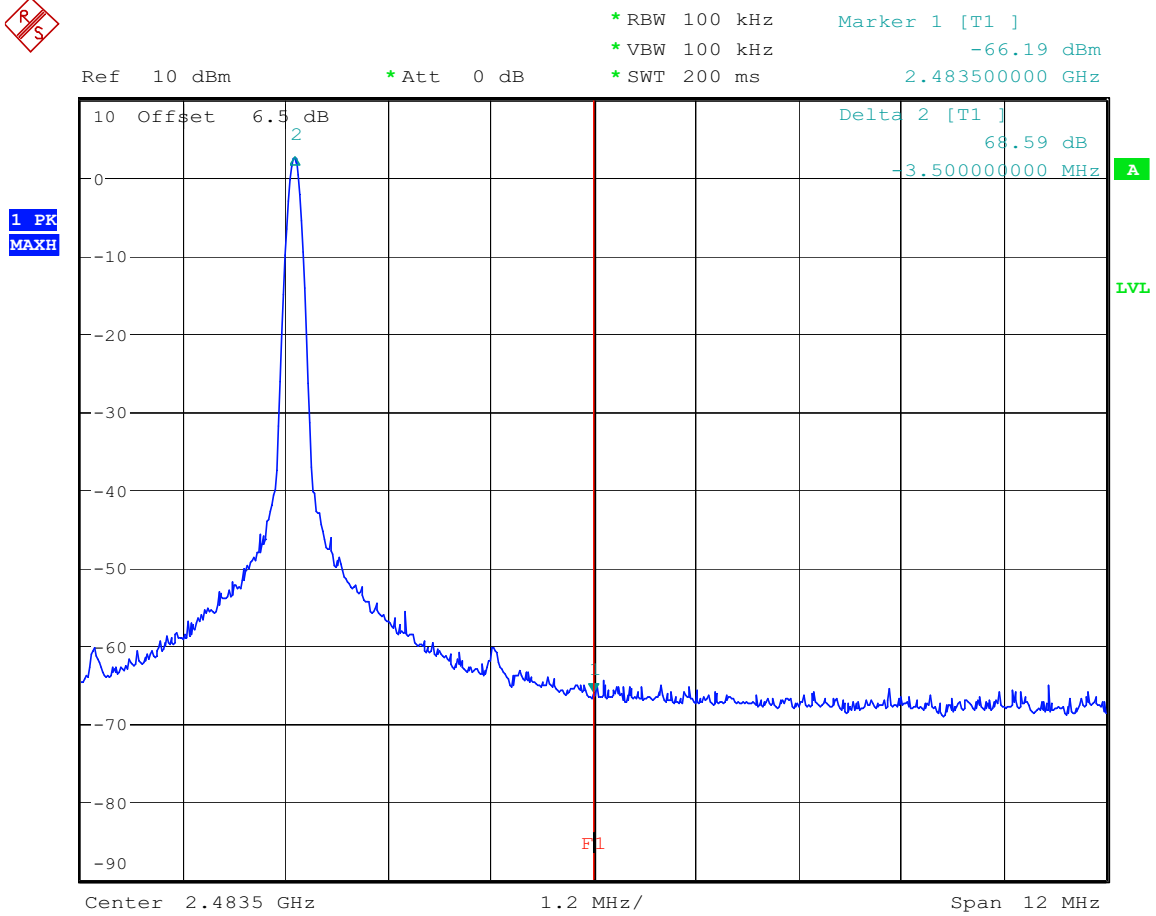


BANDEGE COMPLIANCE CH 78 (CONDUCT , SINGLE MODE)

Date: 26.OCT.2006 14:57:30

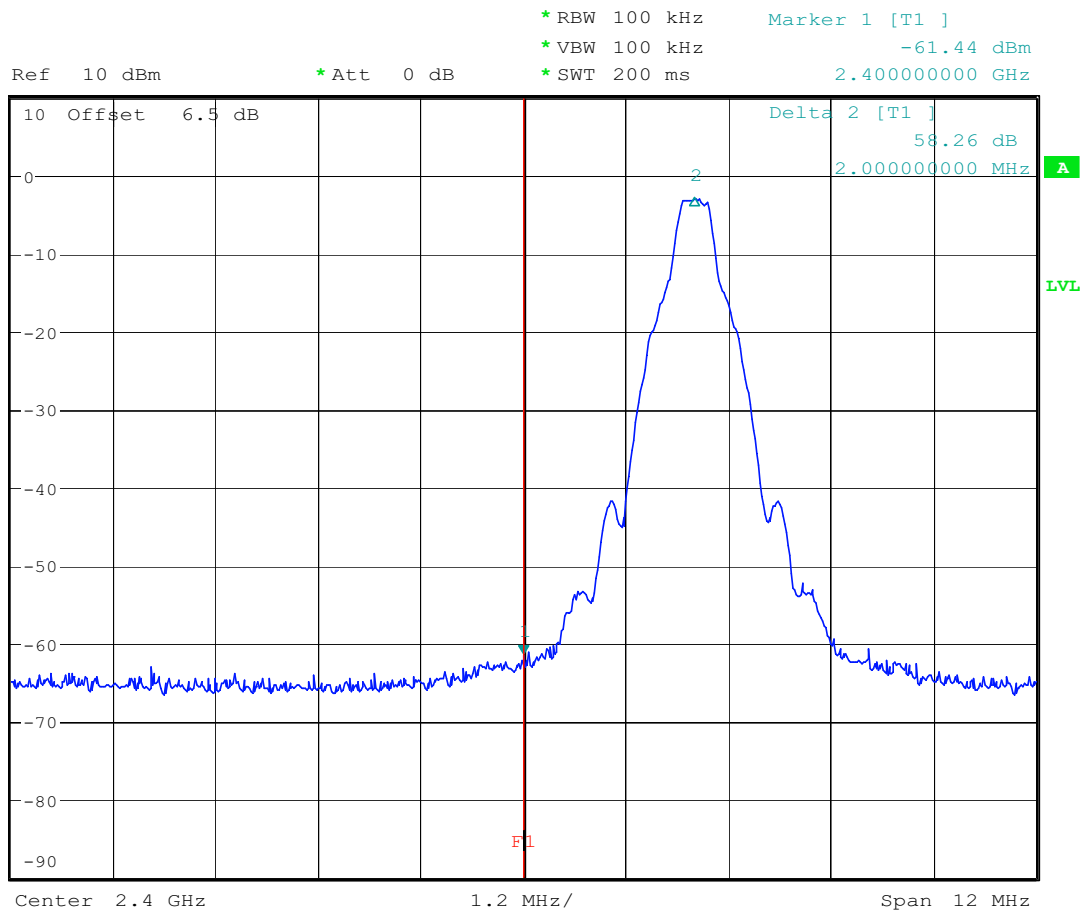


BANDEDGE COMPLIANCE CH 0 (CONDUCT , HOPPING MODE)

Date: 26.OCT.2006 14:56:10

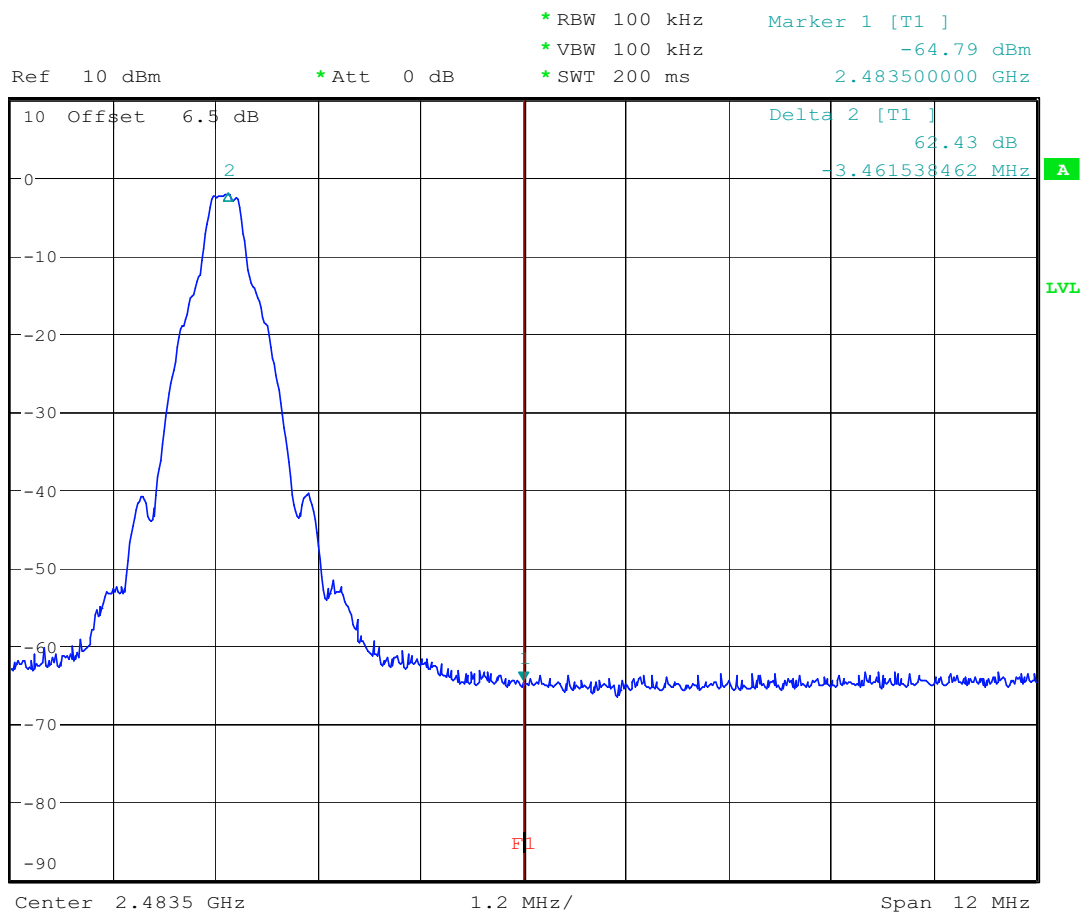


BANDEDGE COMPLIANCE CH 78 (CONDUCT , HOPPING MODE)

Date: 26.OCT.2006 14:58:03

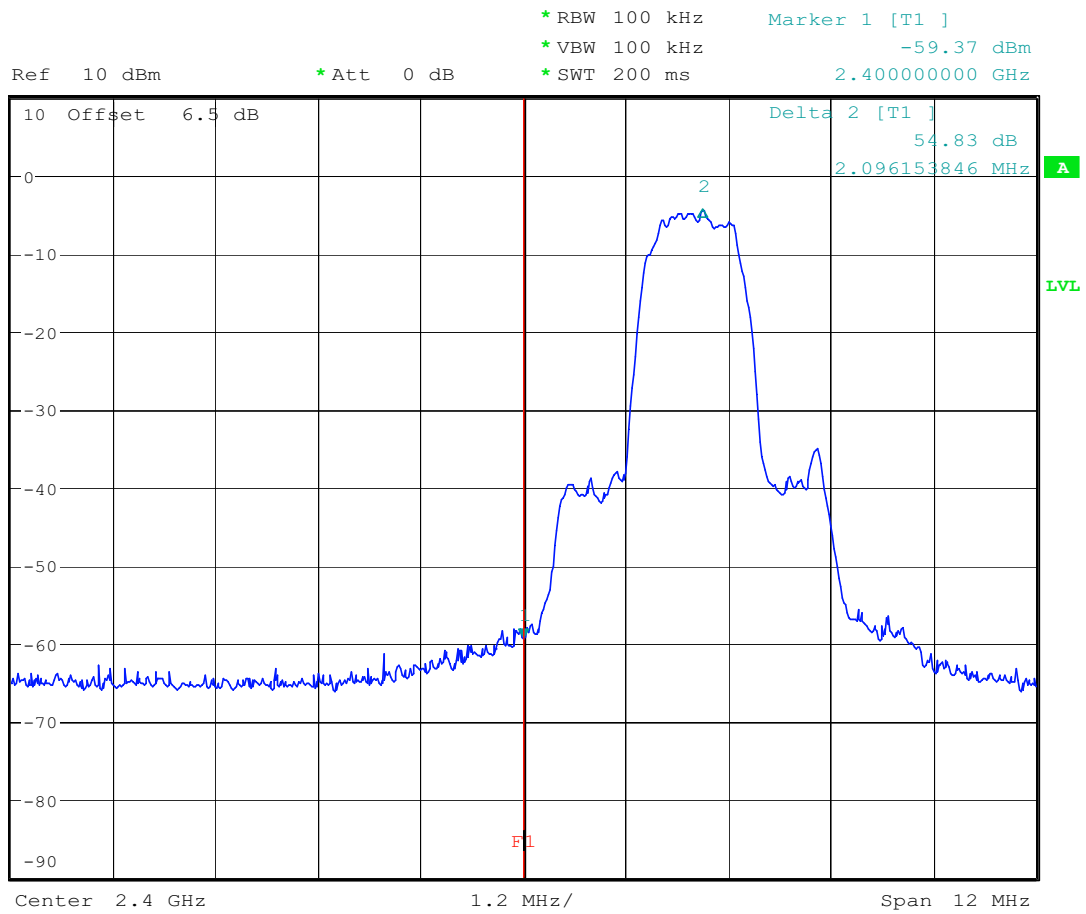

BANDEDGE COMPLIANCE CH 0 (CONDUCT , HOPPING MODE) EDR Mode

Date: 26.OCT.2006 14:55:03

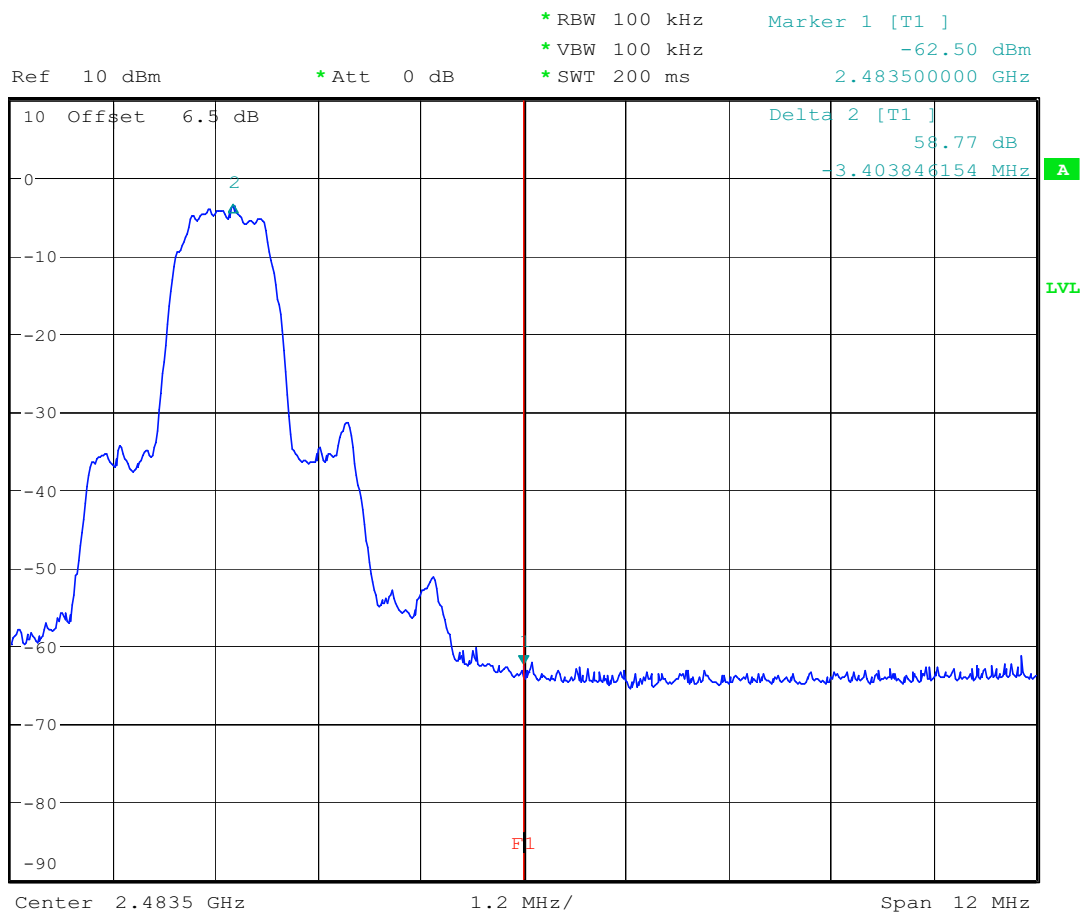

BANDEDGE COMPLIANCE CH 78 (CONDUCT , HOPPING MODE) EDR Mode

Date: 26.OCT.2006 14:51:59

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Appendix H


Radiated Emissions from Receiver Section of Transceiver

The measurement diagrams plots attached below are preliminary wideband scan with a peak detector and for reference only. The final test results are listed on section 3.12

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:141.426MHz Emax:33.98dBµV/m RBW: 100 kHz

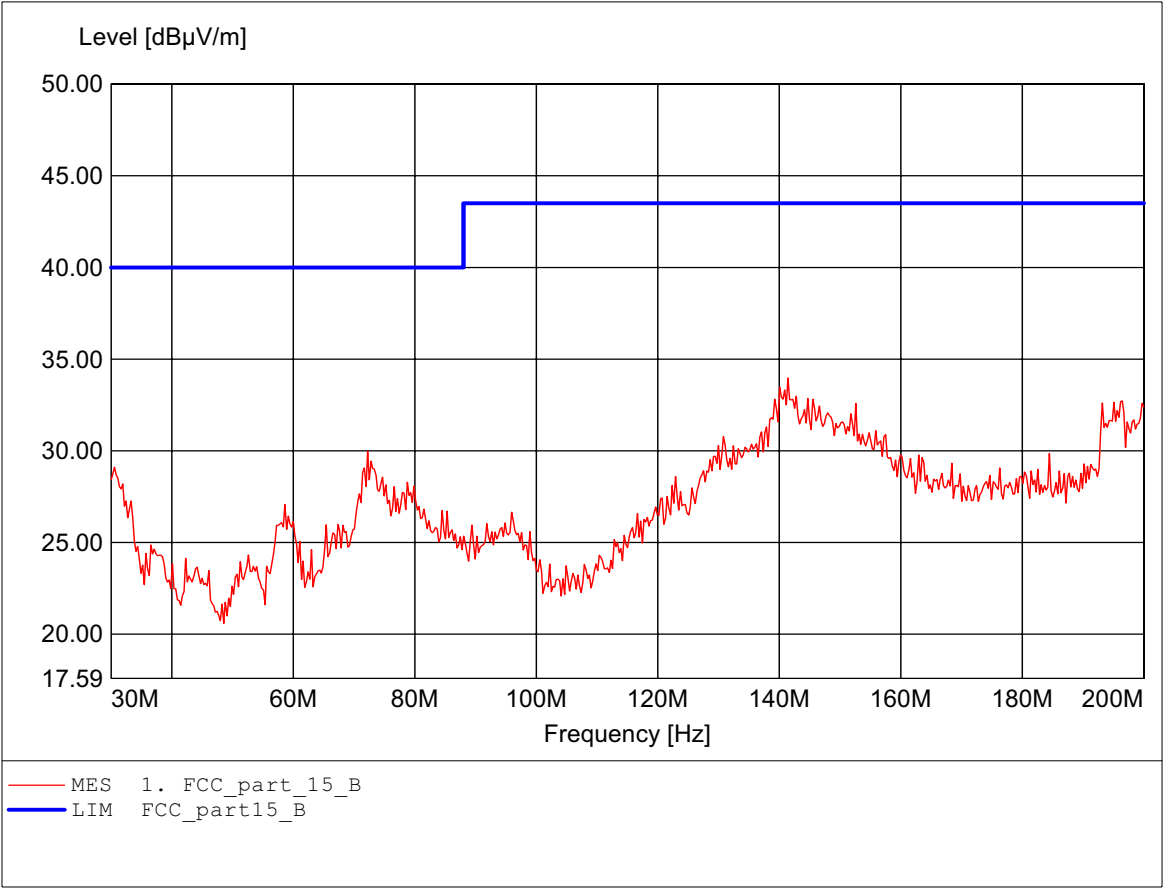

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:30.000MHz Emax:38.22dBμV/m RBW: 100 kHz

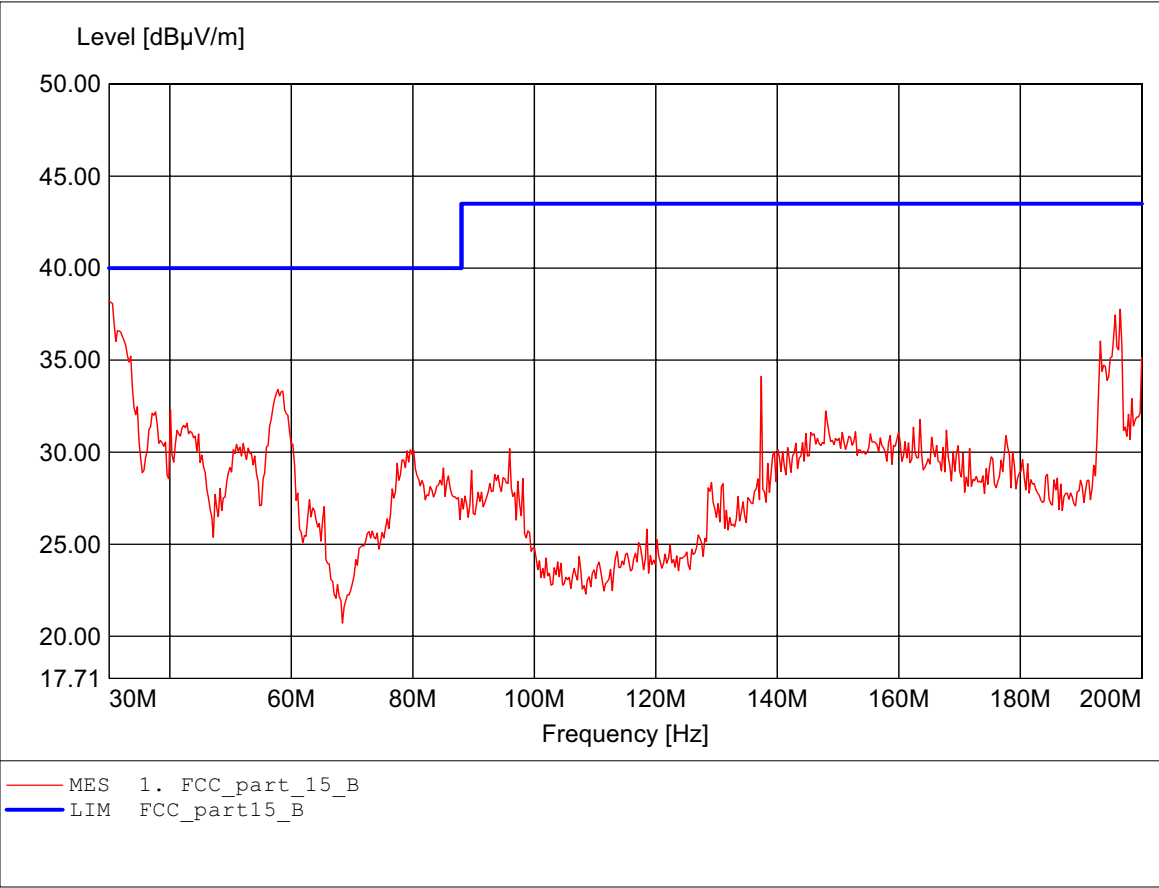

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:982.051MHz Emax:42.22dBµV/m RBW: 100 kHz

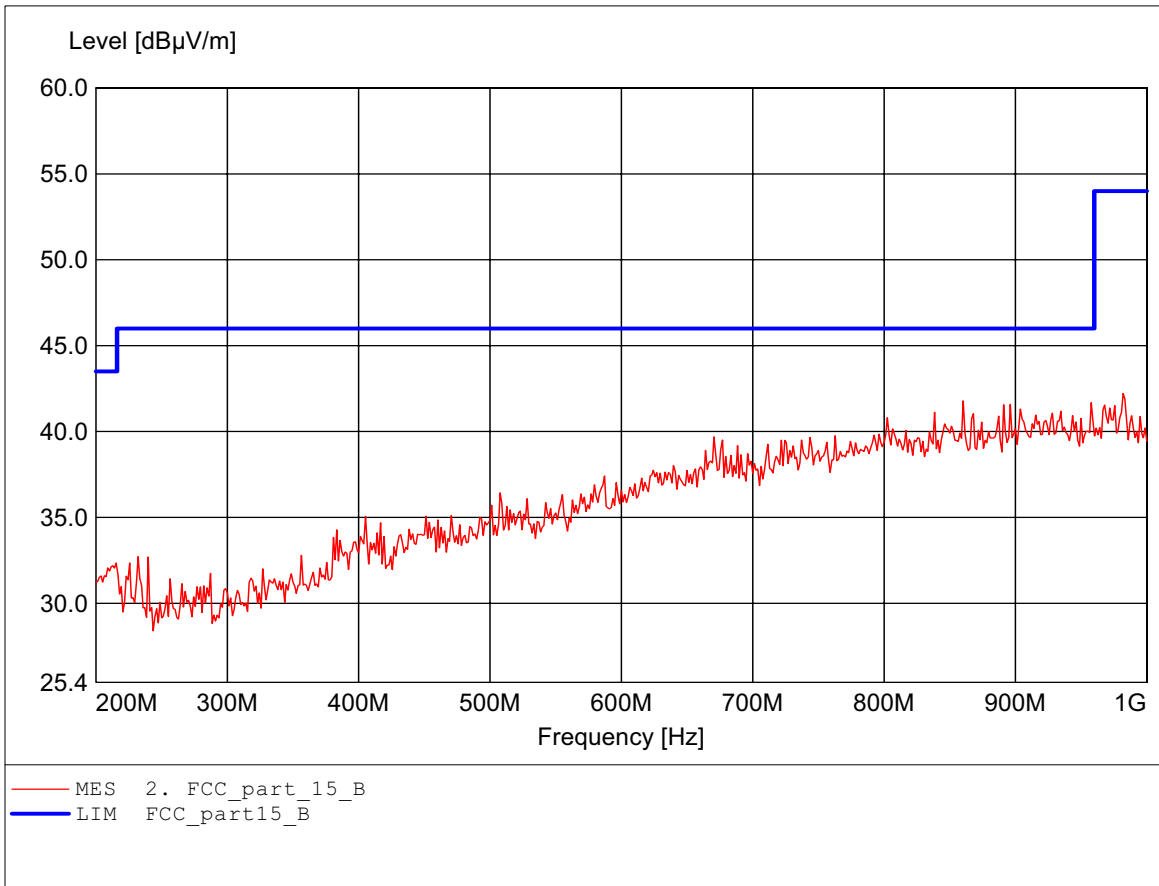

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:975.641MHz Emax:42.44dBμV/m RBW: 100 kHz

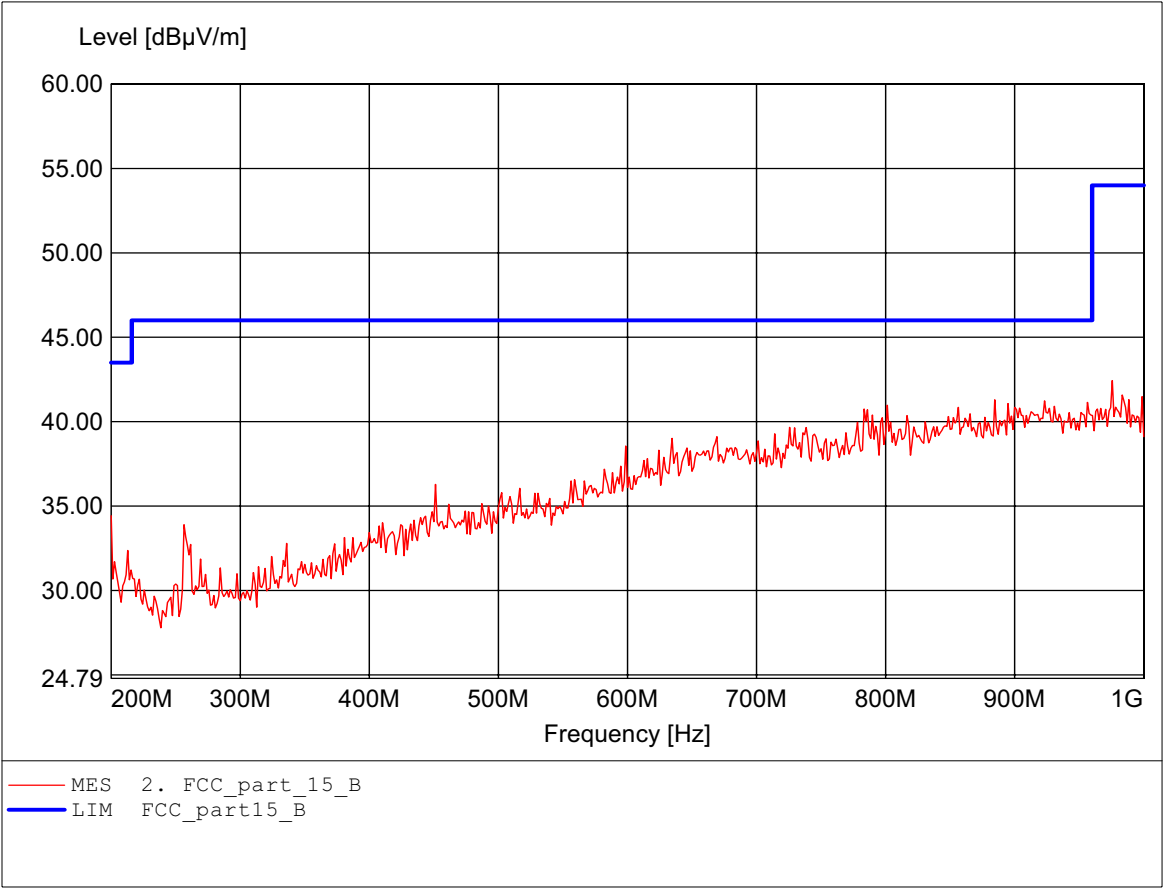

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:1.601GHz Emax:44.57dBμV/m RBW: 1 MHz

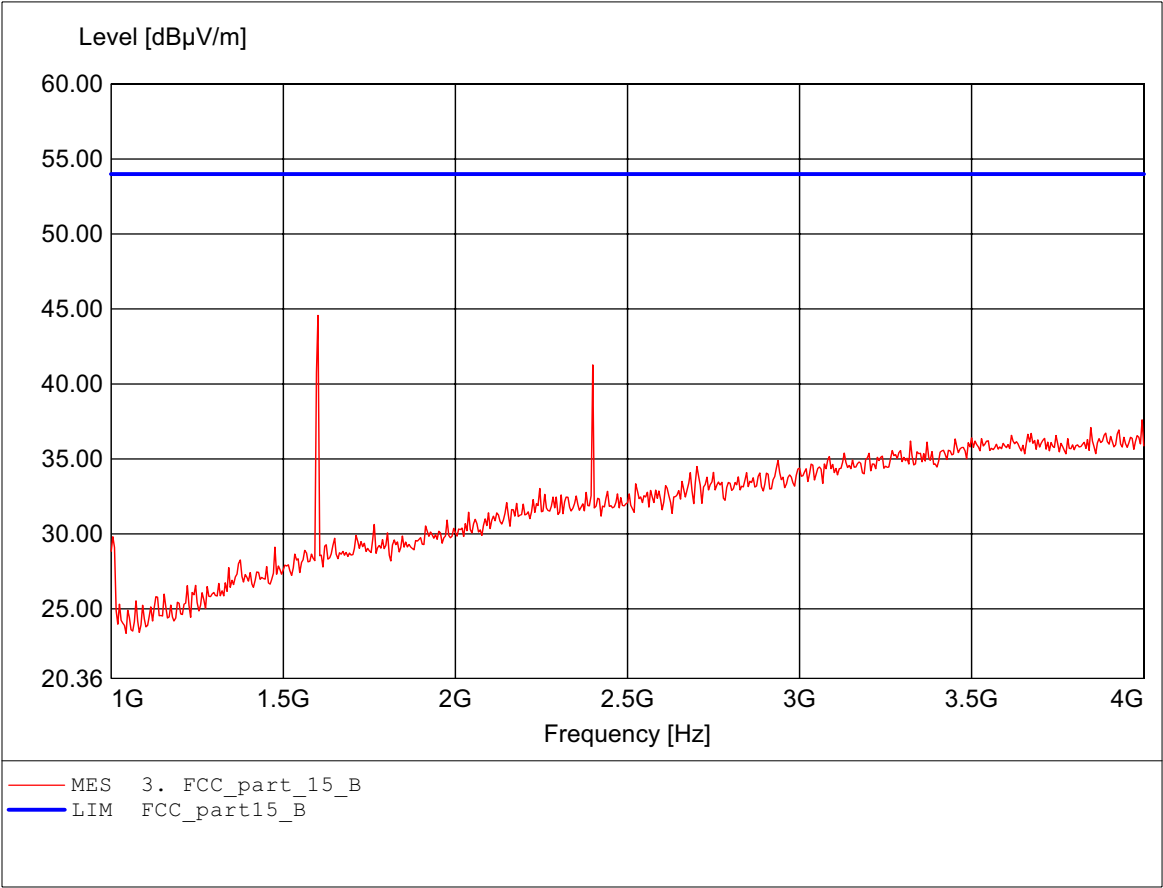

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:1.601GHz Emax:41.94dBμV/m RBW: 1 MHz

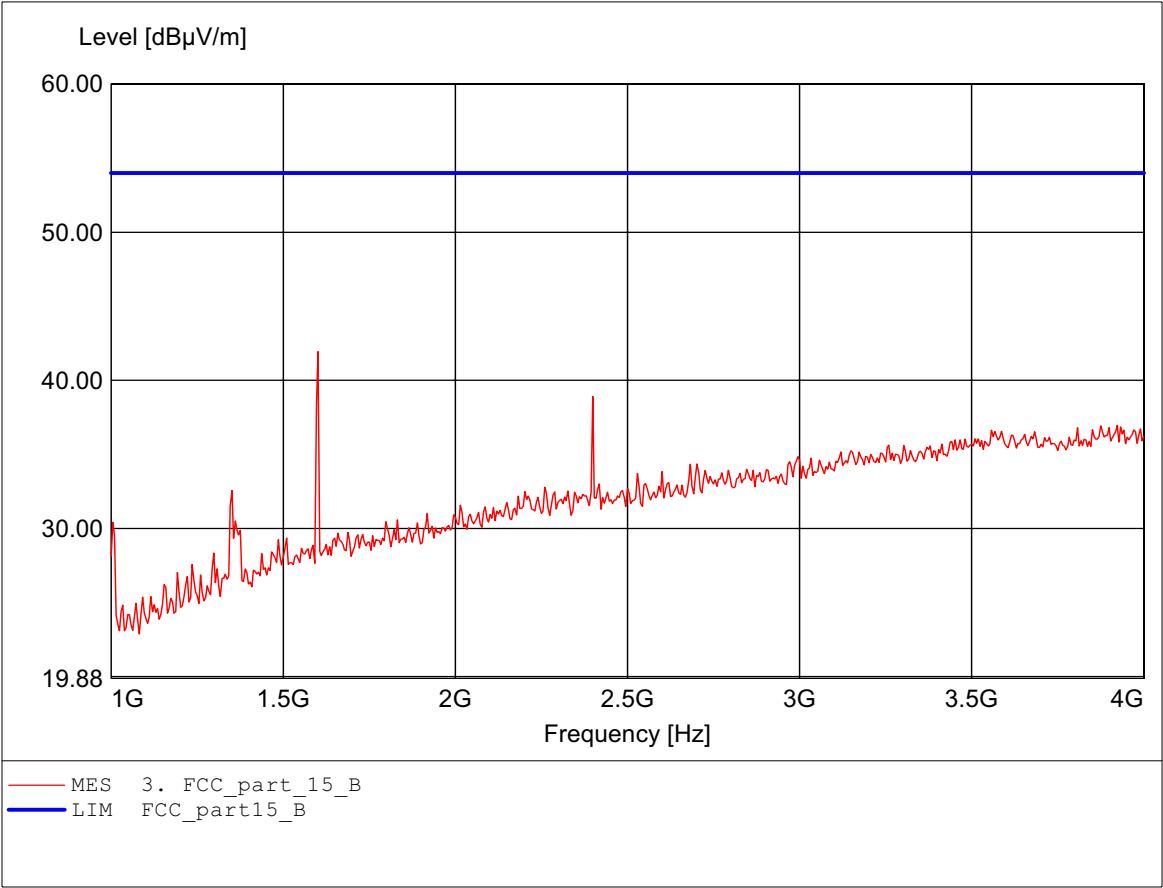

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:4.801GHz Emax:50.13dBμV/m RBW: 1 MHz

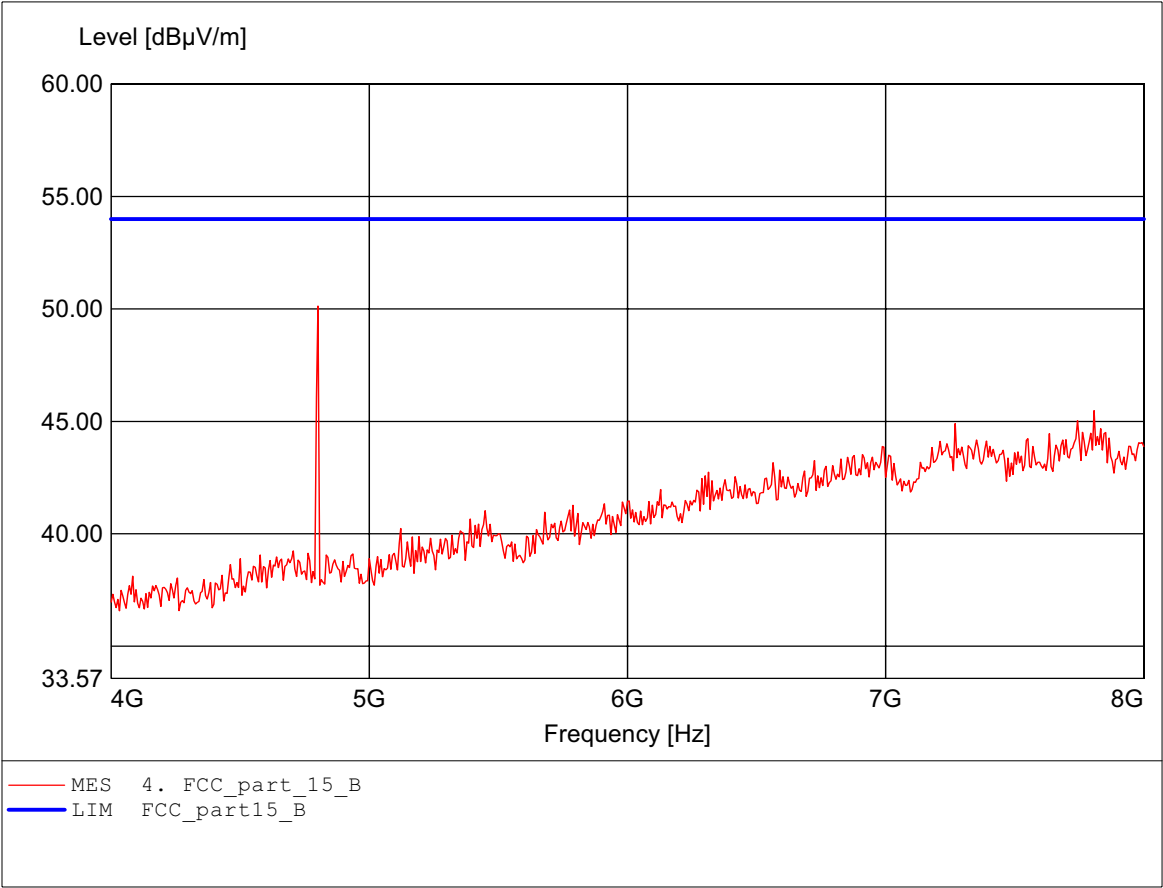

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.263GHz Emax:45.52dBμV/m RBW: 1 MHz

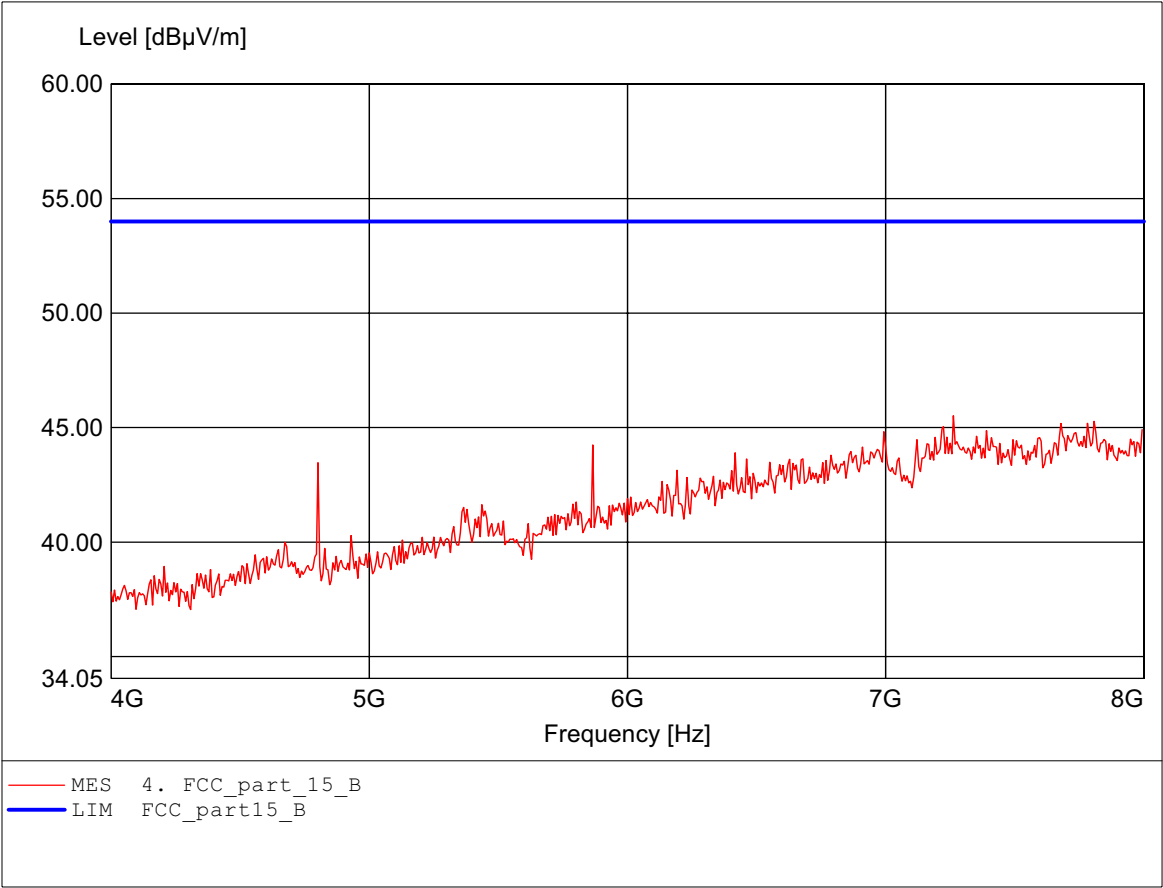

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.571GHz Emax:50.28dBμV/m RBW: 1 MHz

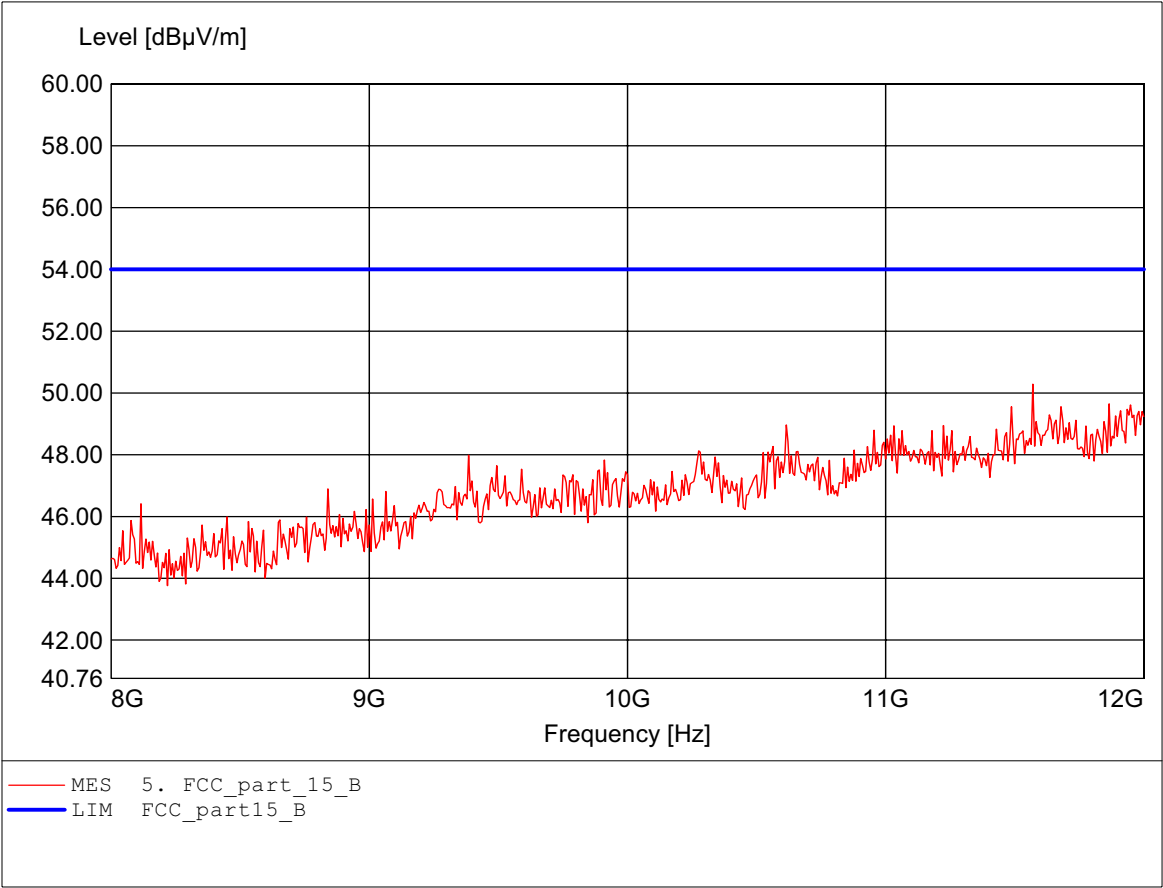

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.987GHz Emax:51.13dBμV/m RBW: 1 MHz

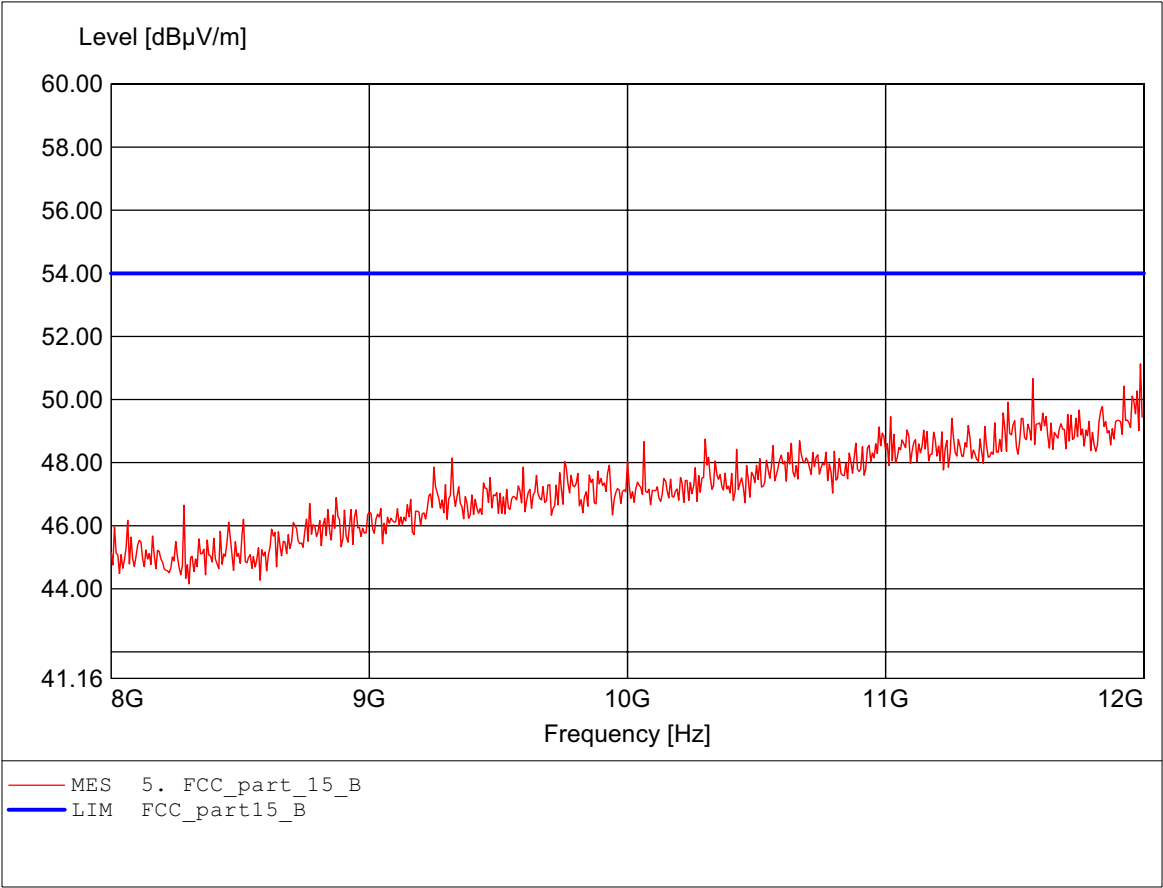

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.904GHz Emax:51.44dBμV/m RBW: 1 MHz

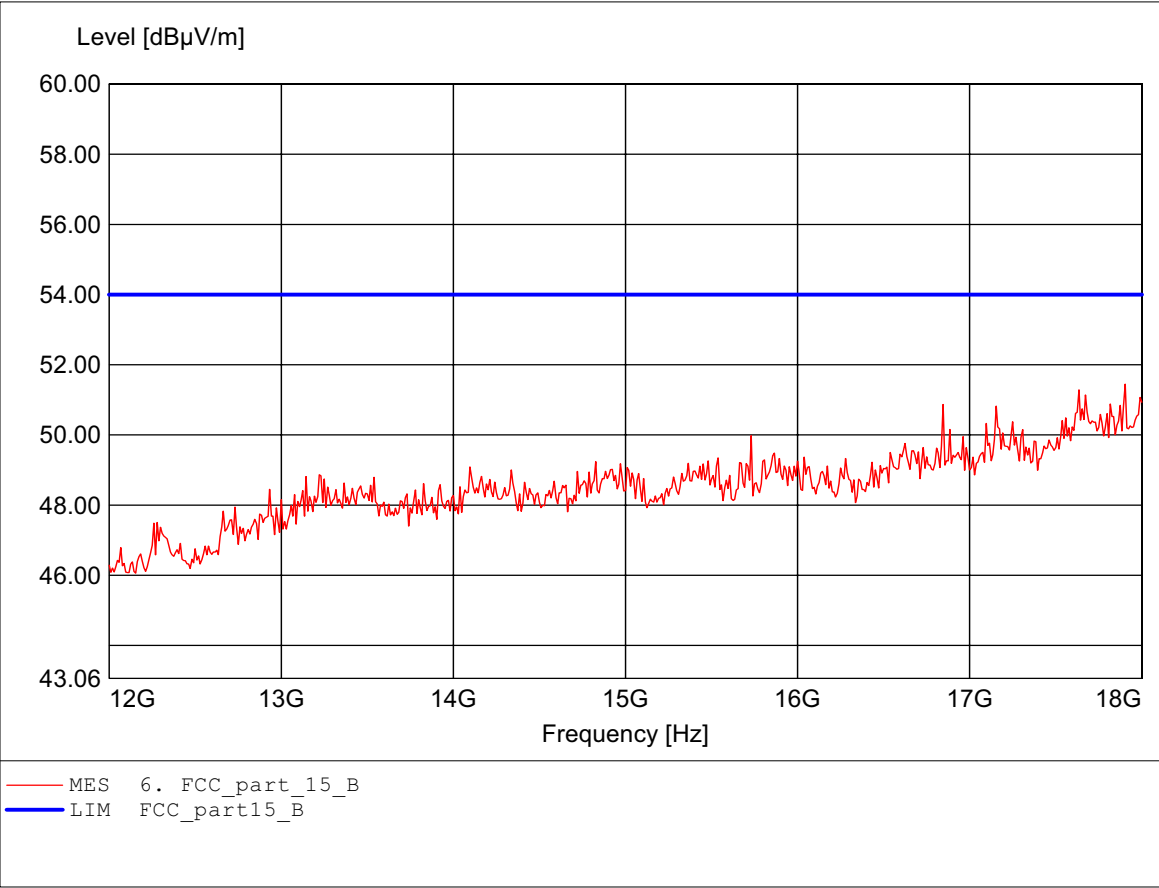

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch0
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.760GHz Emax:52.27dBμV/m RBW: 1 MHz

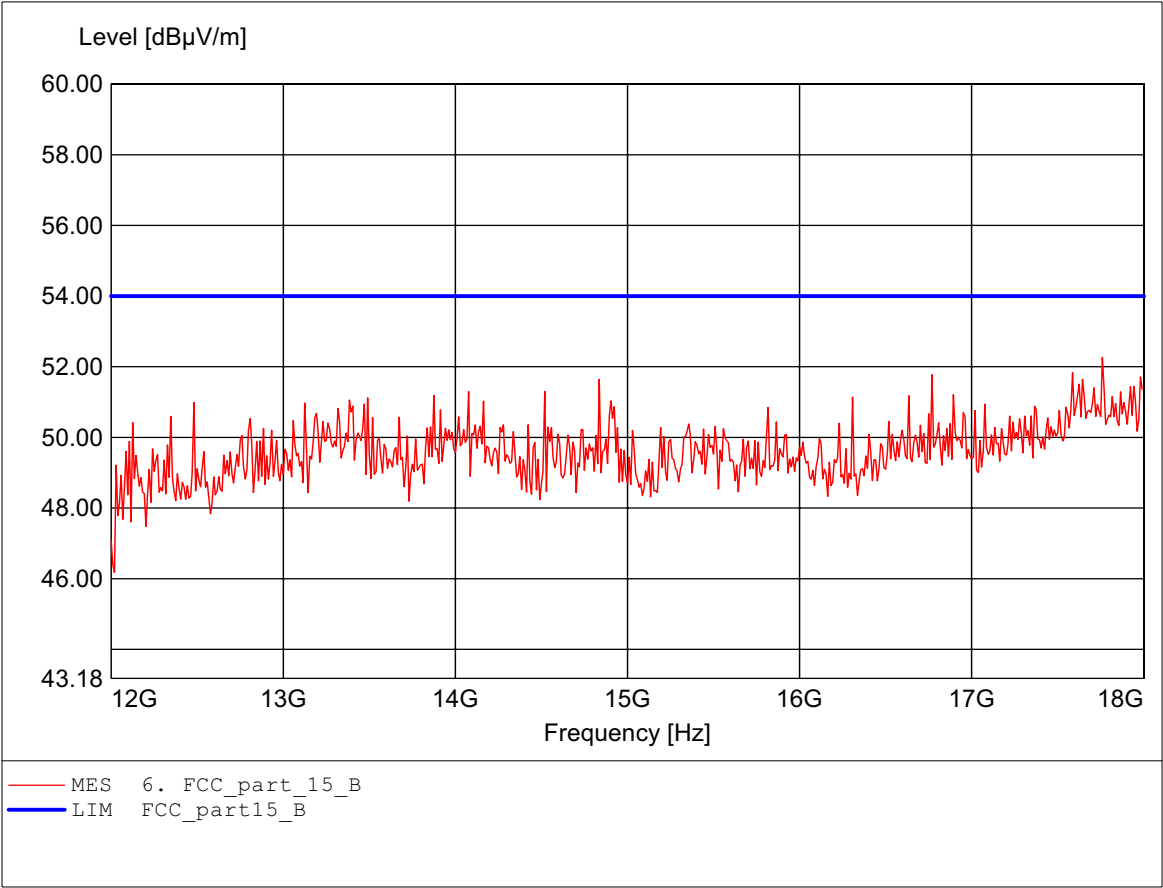

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:140.881MHz Emax:32.75dBµV/m RBW: 100 kHz

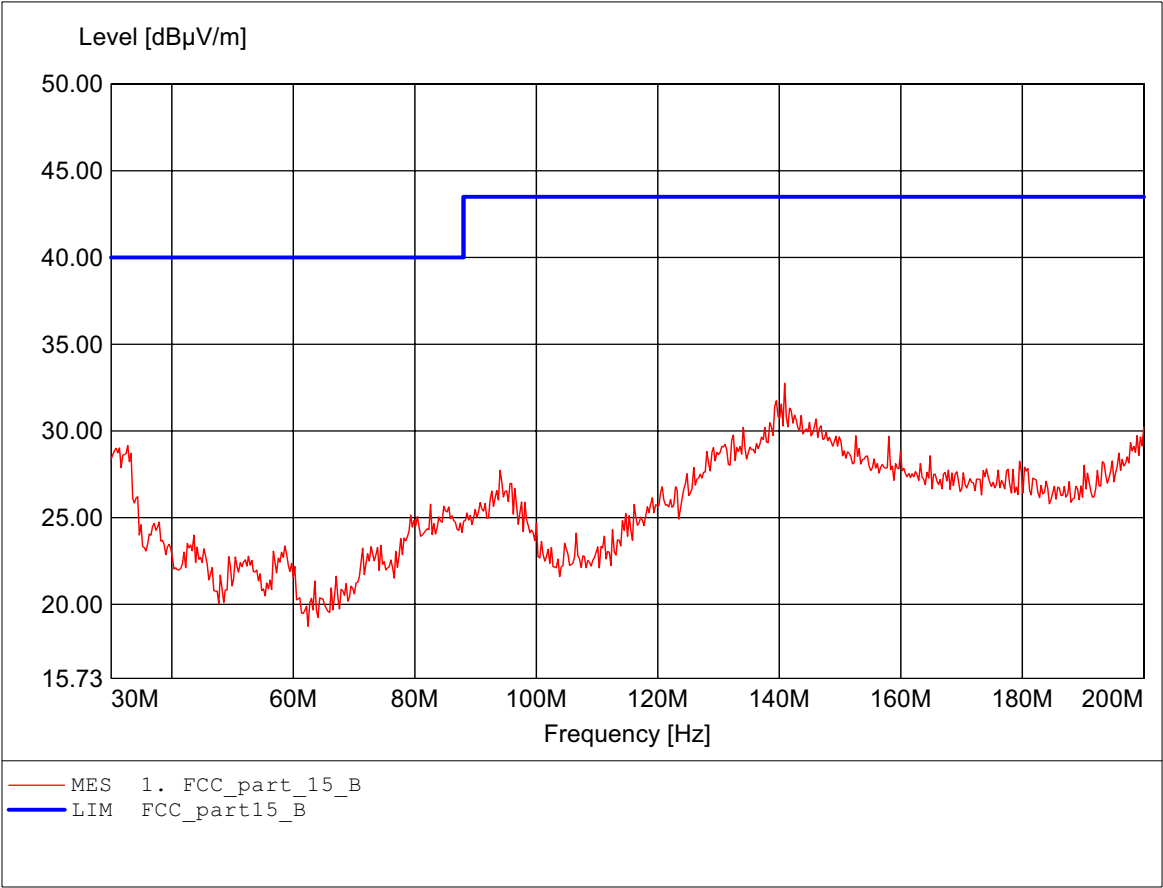

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:30.545MHz Emax:38.36dBμV/m RBW: 100 kHz

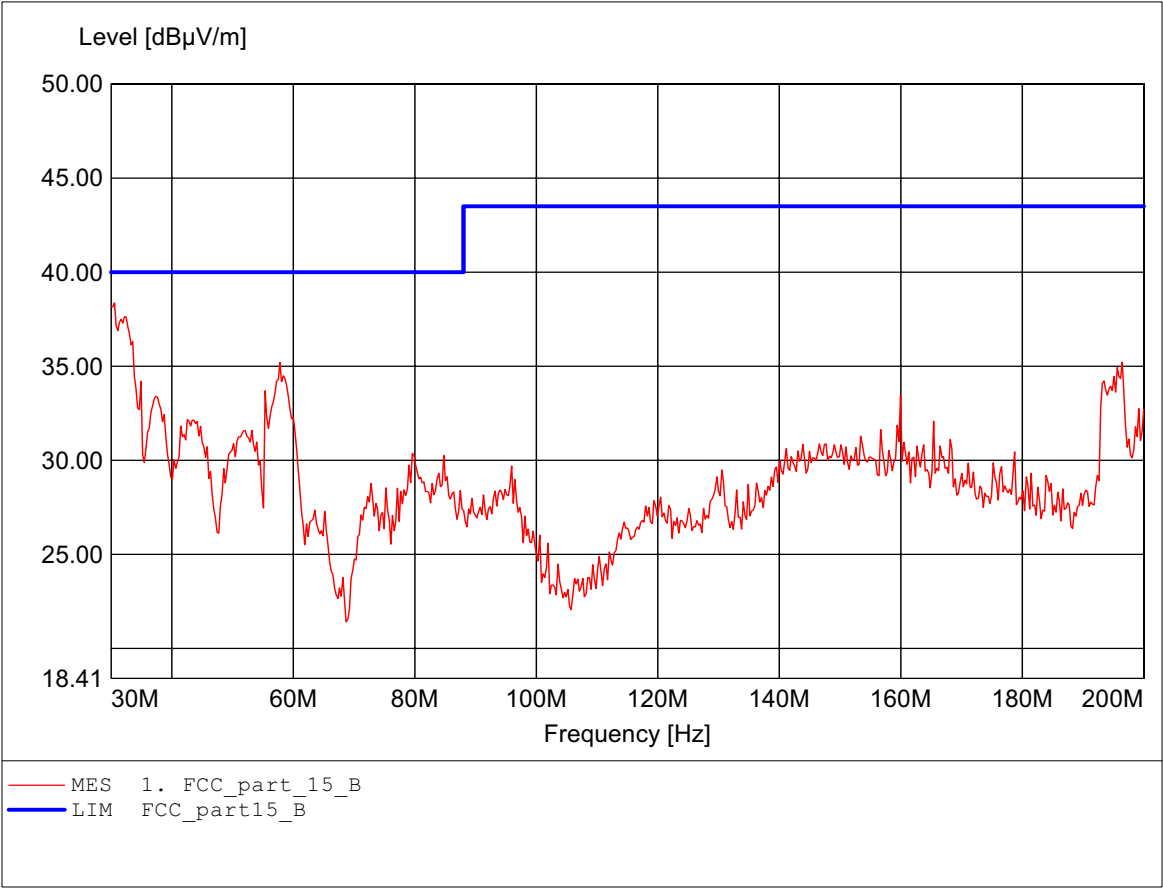

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:958.974MHz Emax:41.95dBμV/m RBW: 100 kHz

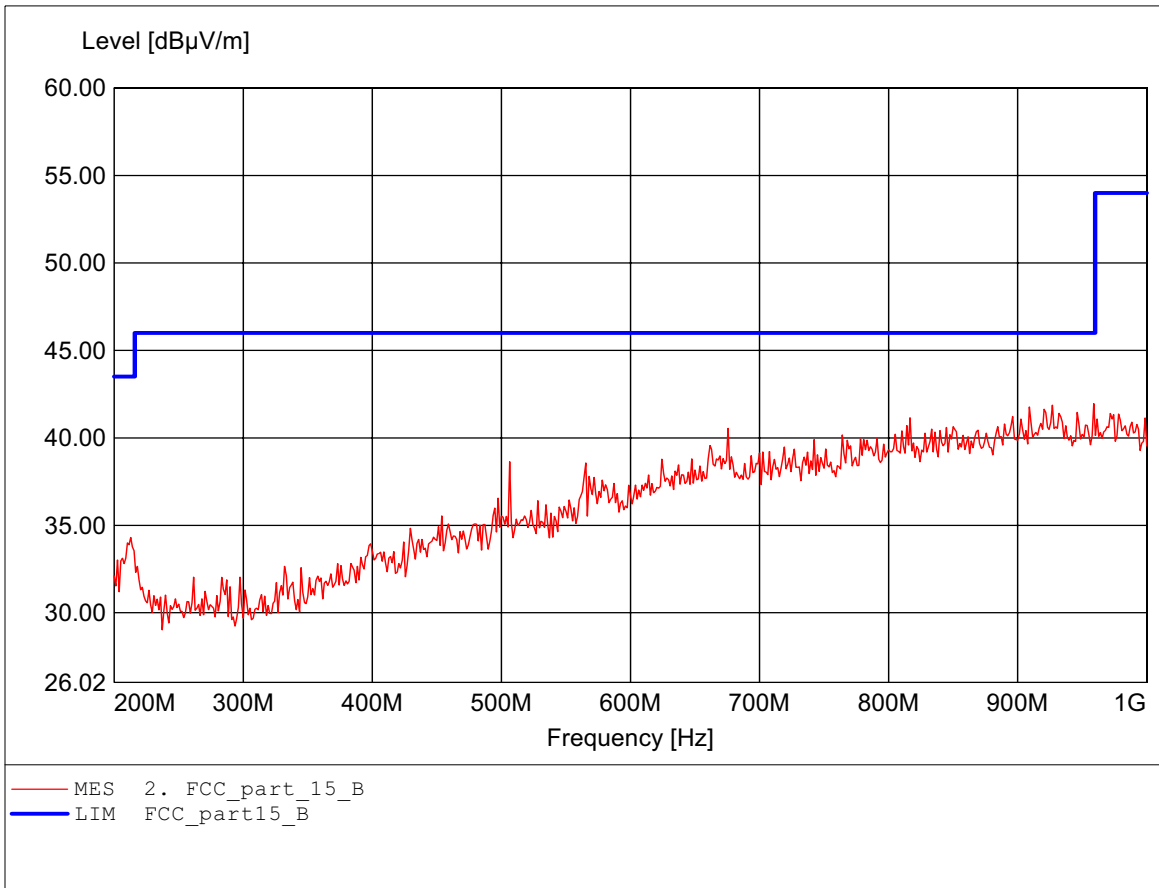

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:920.513MHz Emax:42.02dBμV/m RBW: 100 kHz

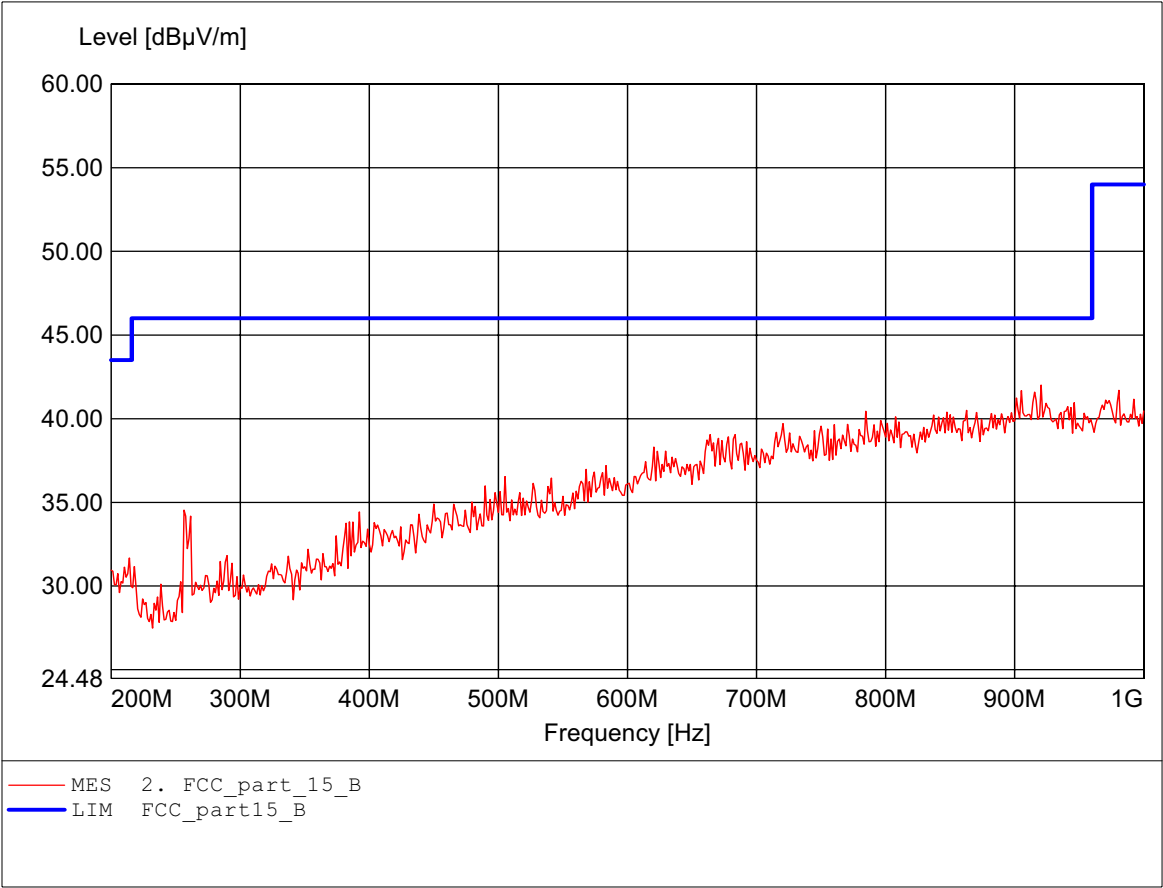

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:1.625GHz Emax:44.49dBμV/m RBW: 1 MHz

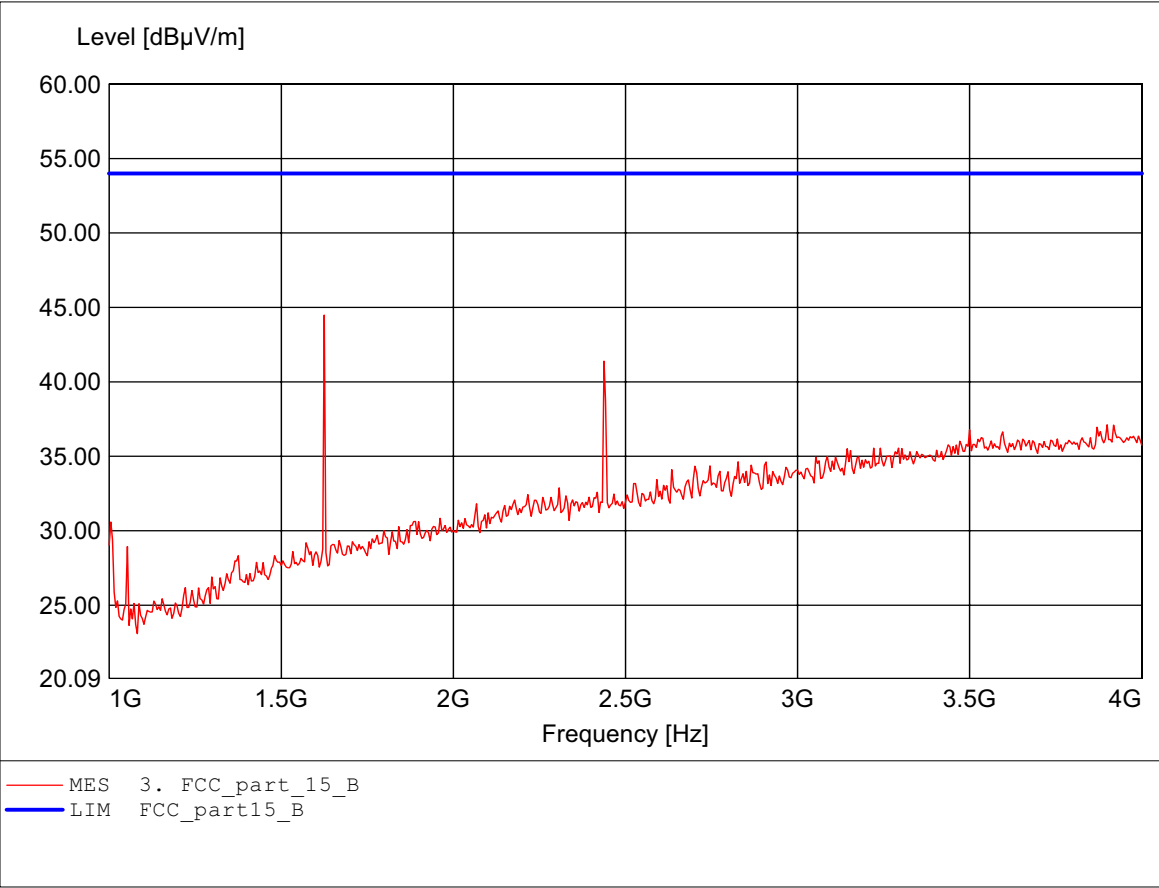

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:3.889GHz Emax:42.21dBμV/m RBW: 1 MHz

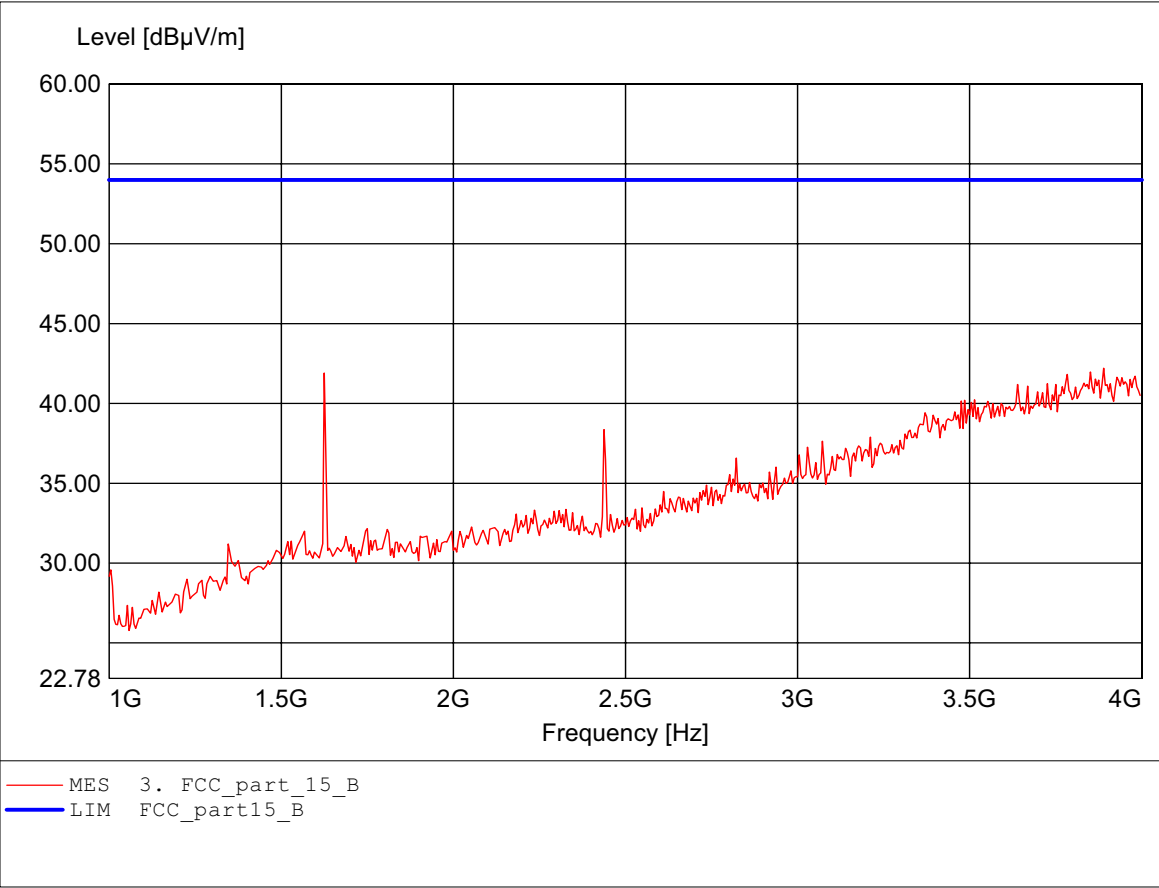

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:4.833GHz Emax:47.74dBμV/m RBW: 1 MHz

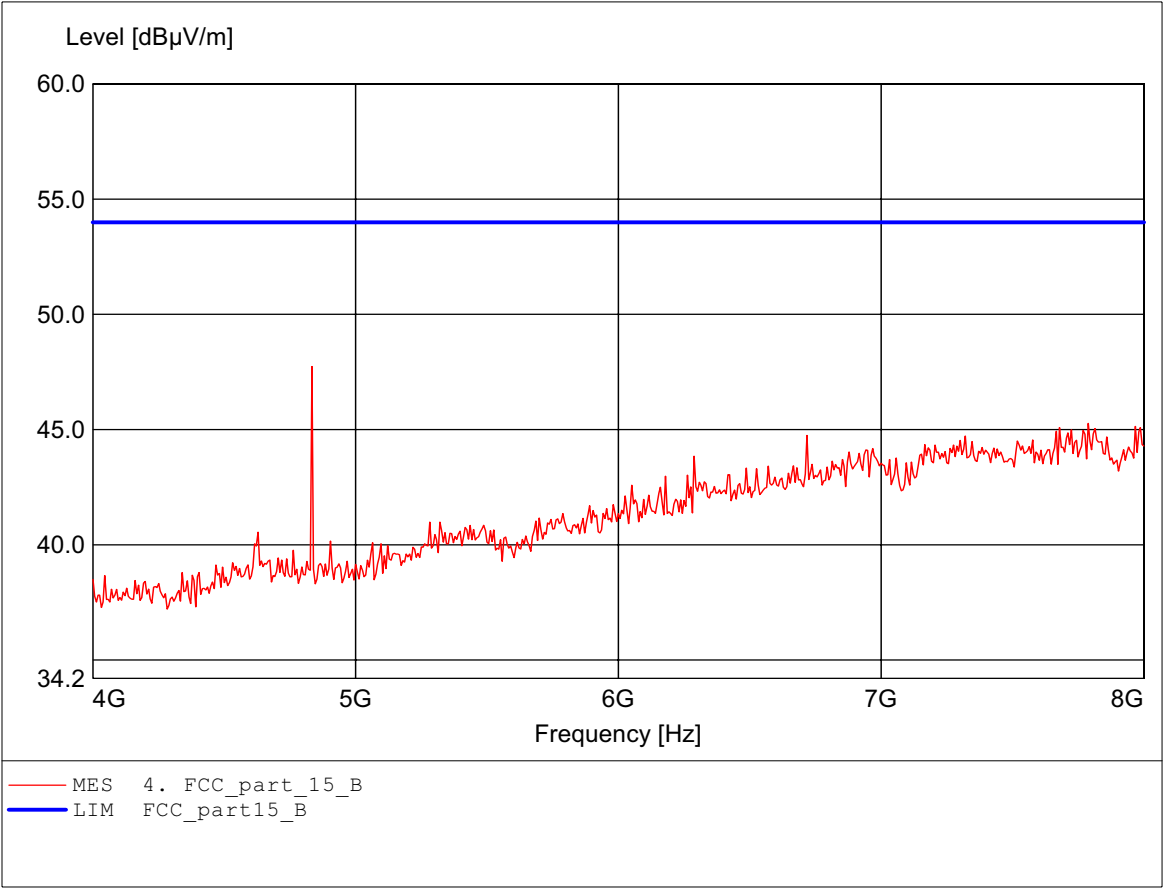

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.872GHz Emax:45.44dBμV/m RBW: 1 MHz

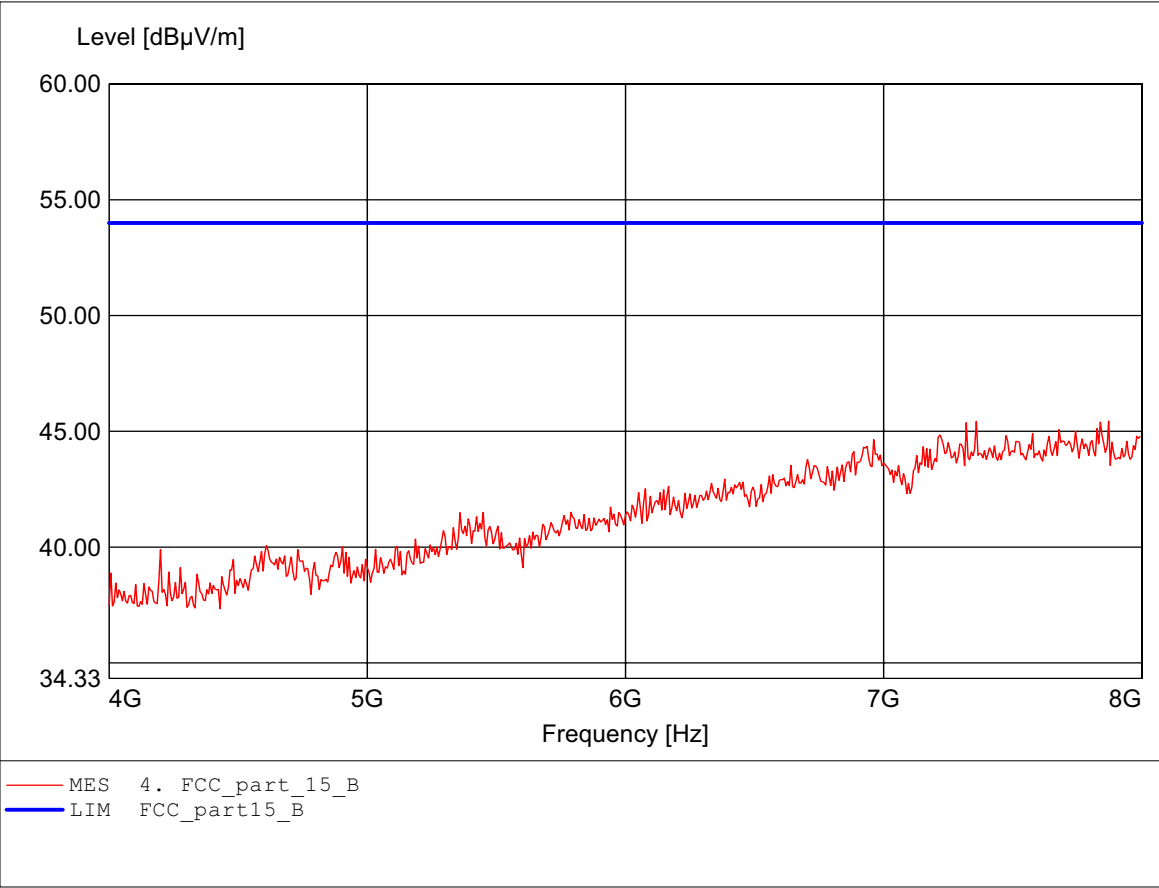

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.974GHz Emax:50.43dBμV/m RBW: 1 MHz

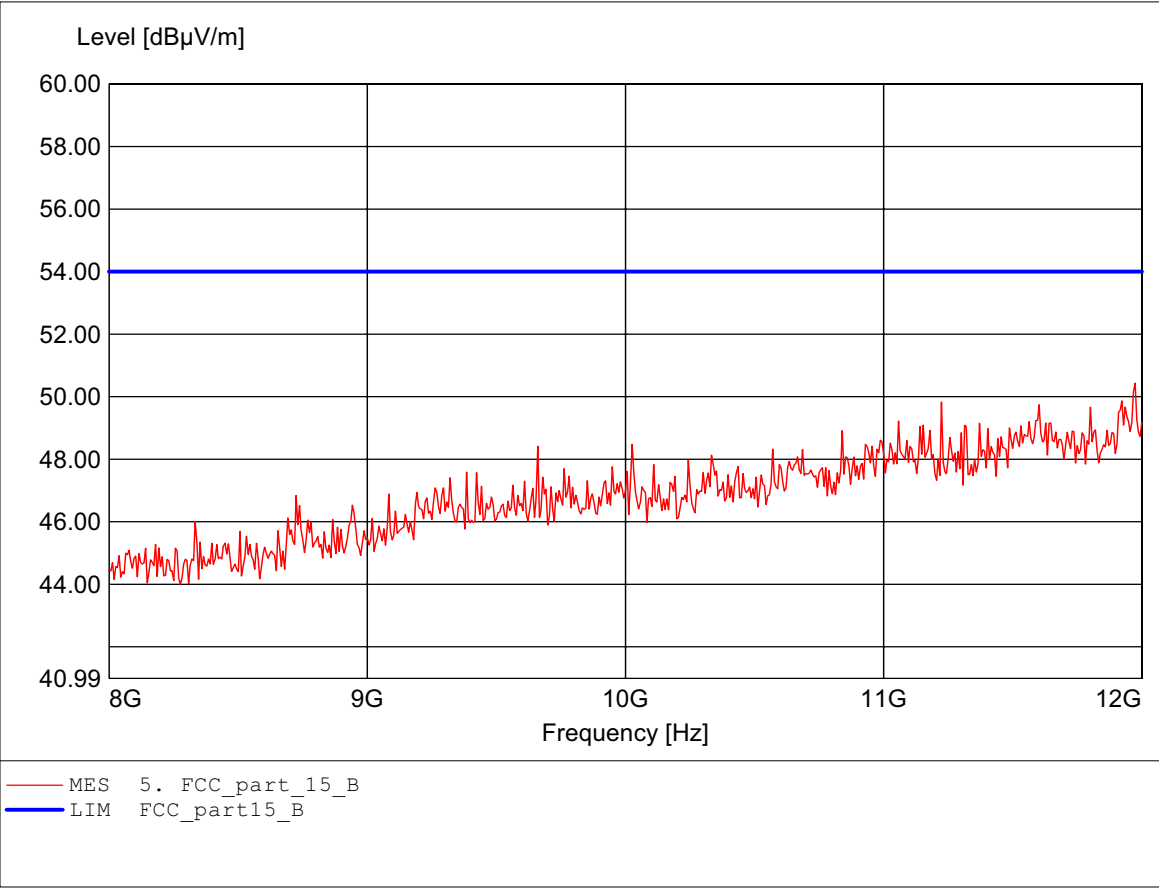

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.686GHz Emax:50.02dBμV/m RBW: 1 MHz

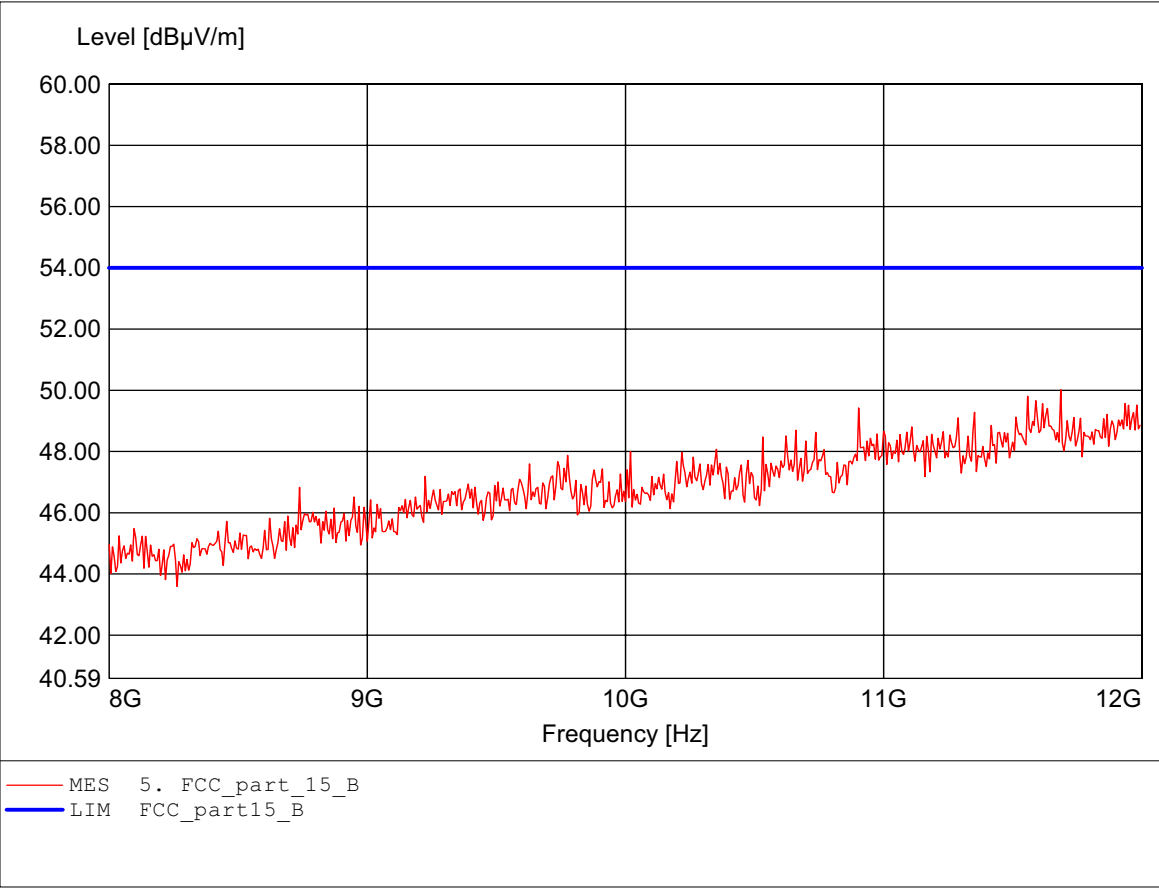

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:14.038GHz Emax:52.52dBµV/m RBW: 1 MHz

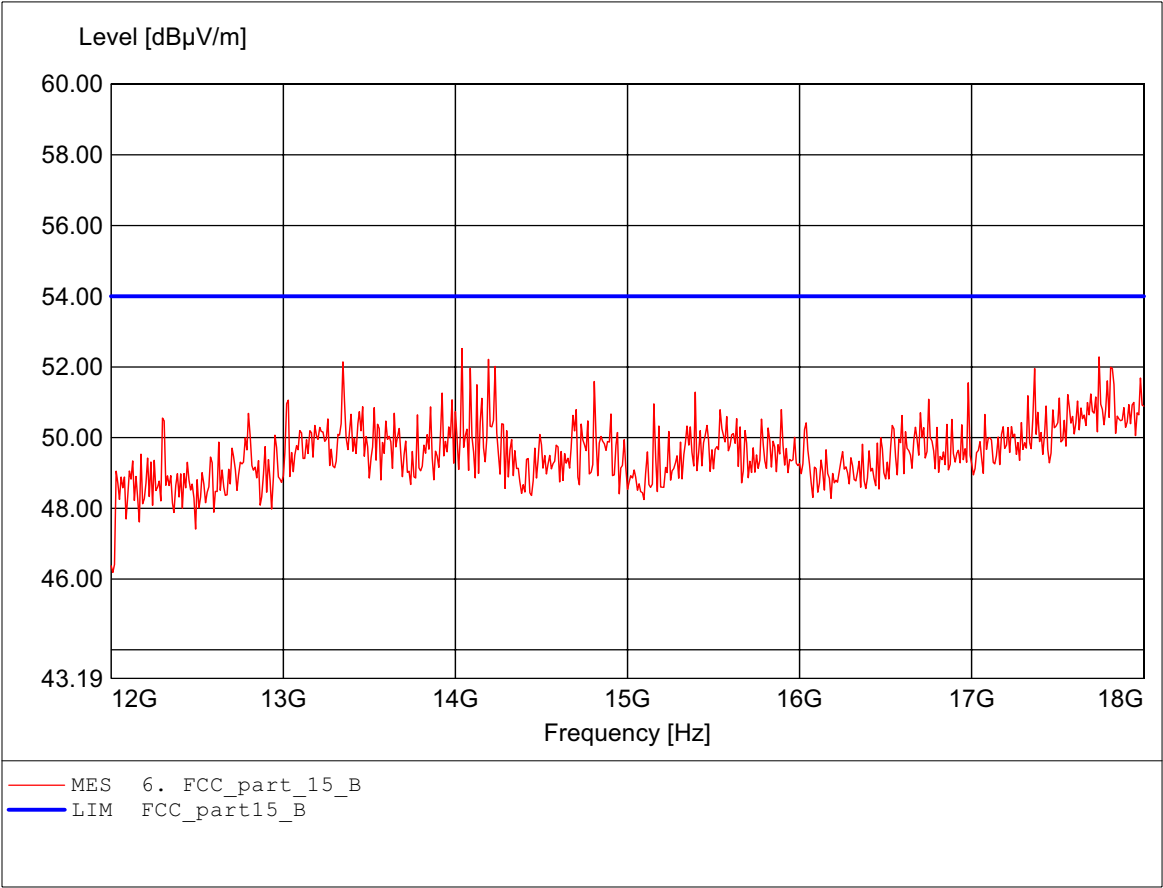

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch39
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.837GHz Emax:51.35dBμV/m RBW: 1 MHz

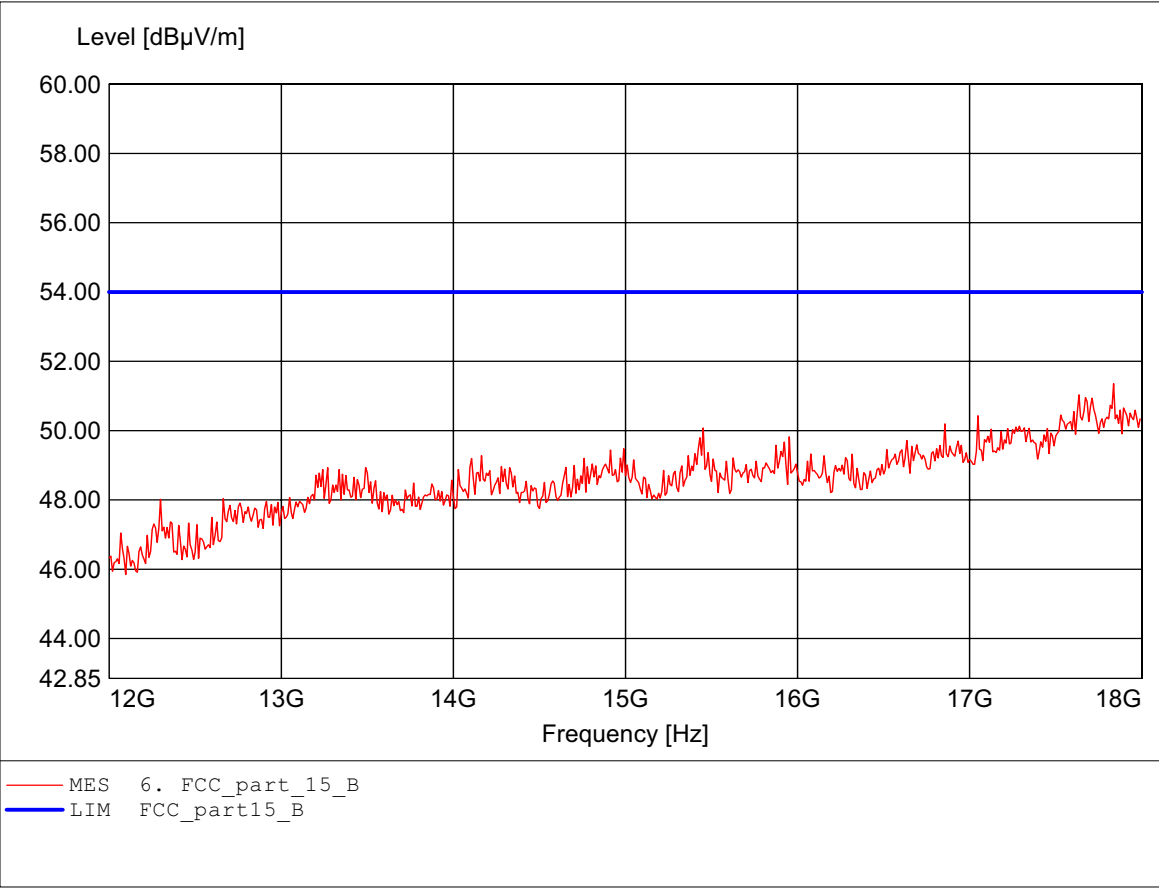

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:196.458MHz Emax:33.45dBμV/m RBW: 100 kHz

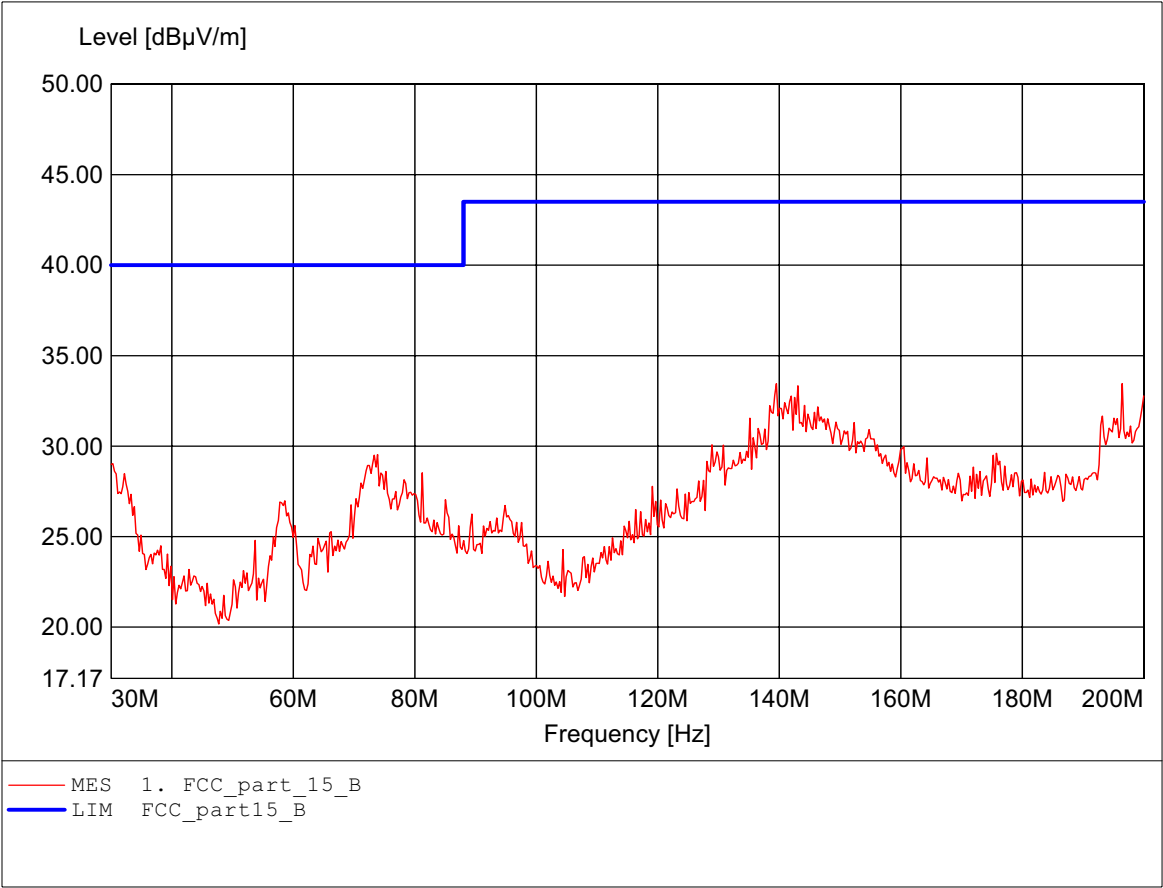

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HK 116
Freq:30.545MHz Emax:38.70dBμV/m RBW: 100 kHz

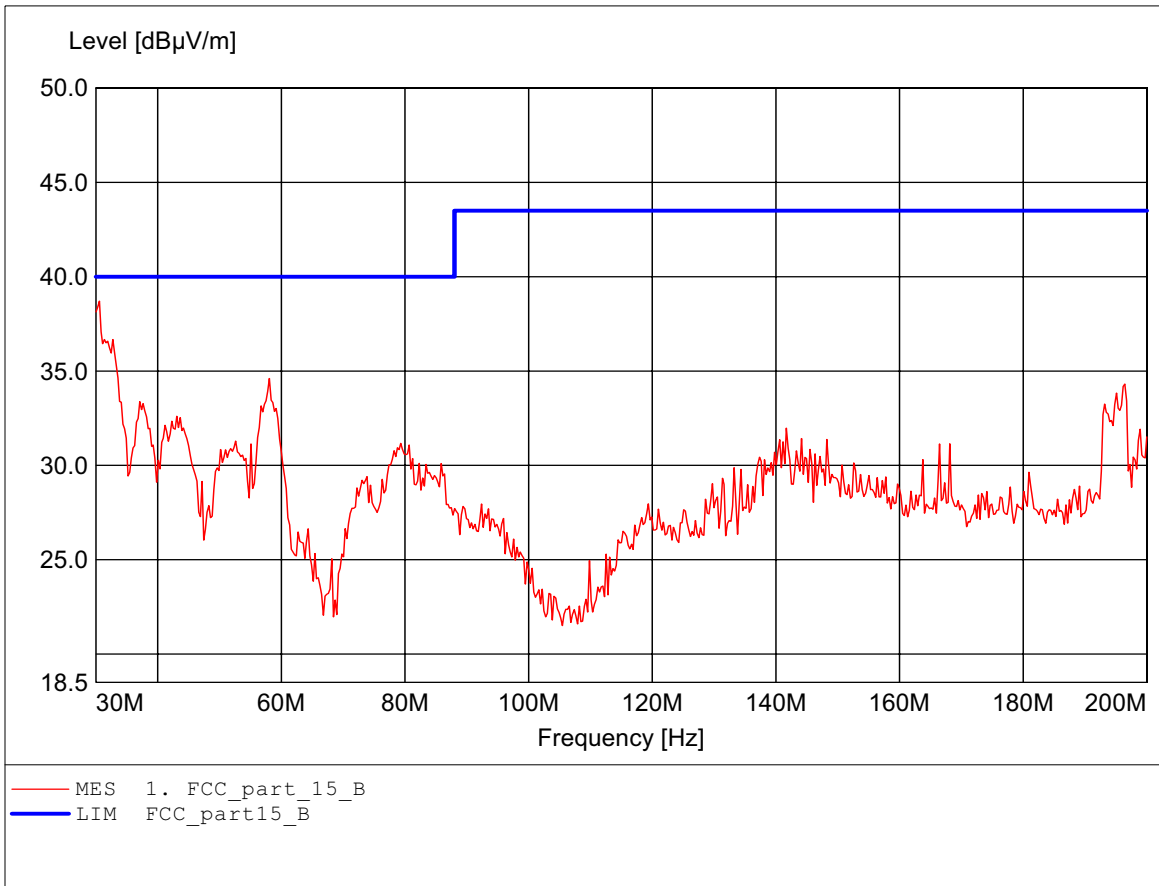

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:976.923MHz Emax:42.68dBμV/m RBW: 100 kHz

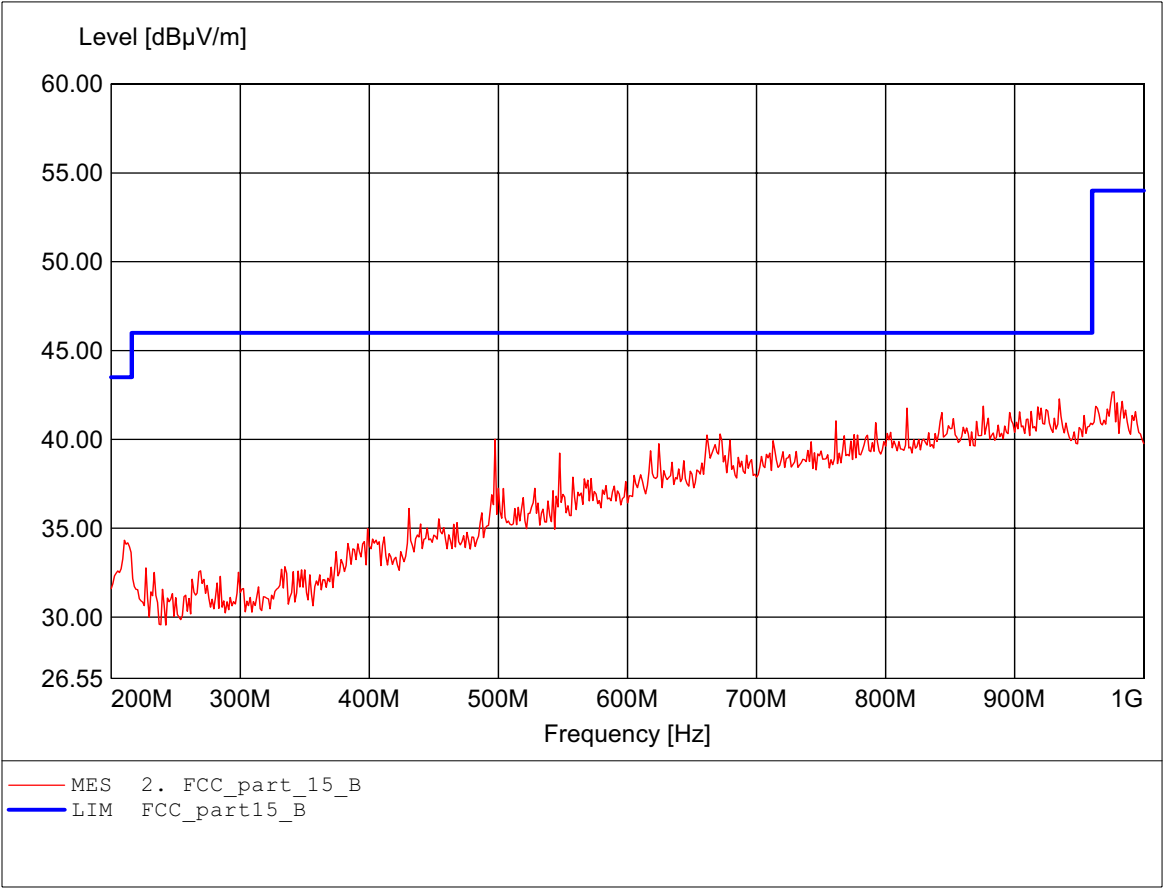

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Freq:925.641MHz Emax:42.22dBµV/m RBW: 100 kHz

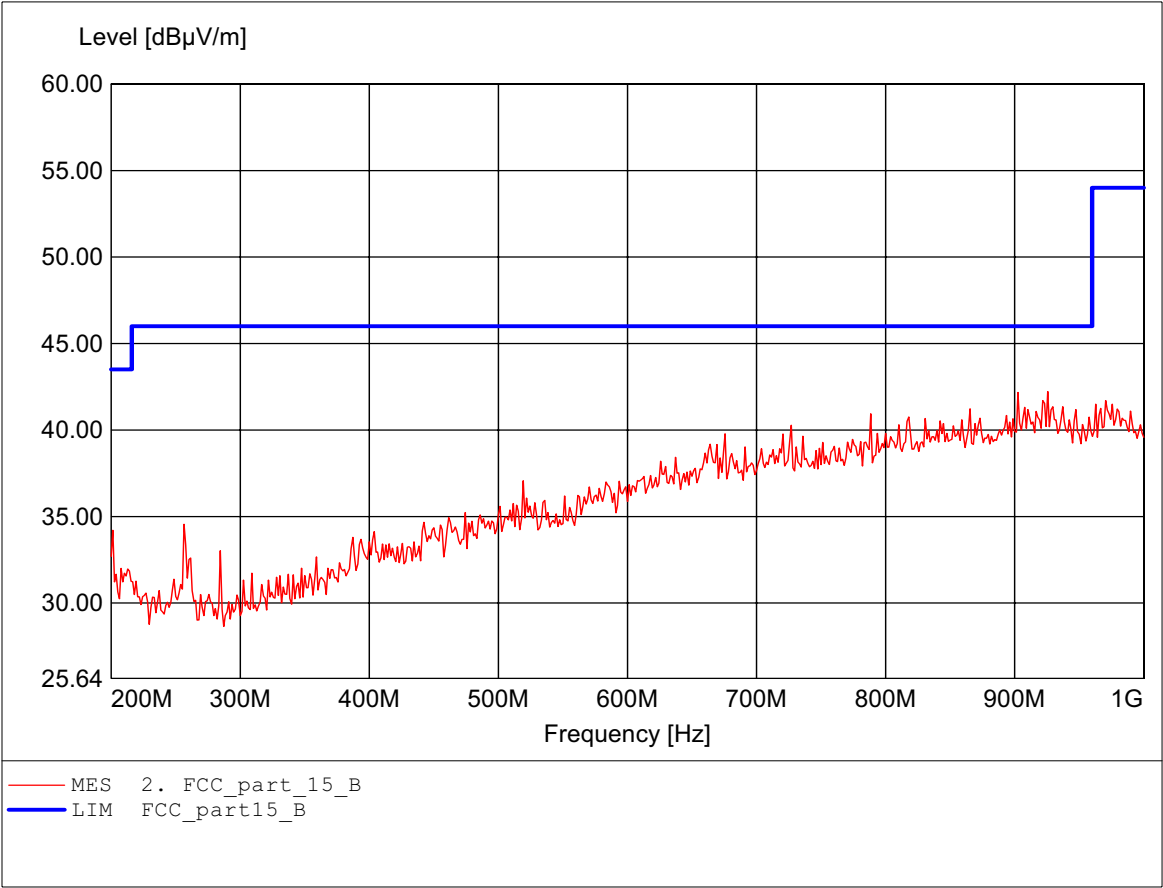

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:1.649GHz Emax:45.29dBμV/m RBW: 1 MHz

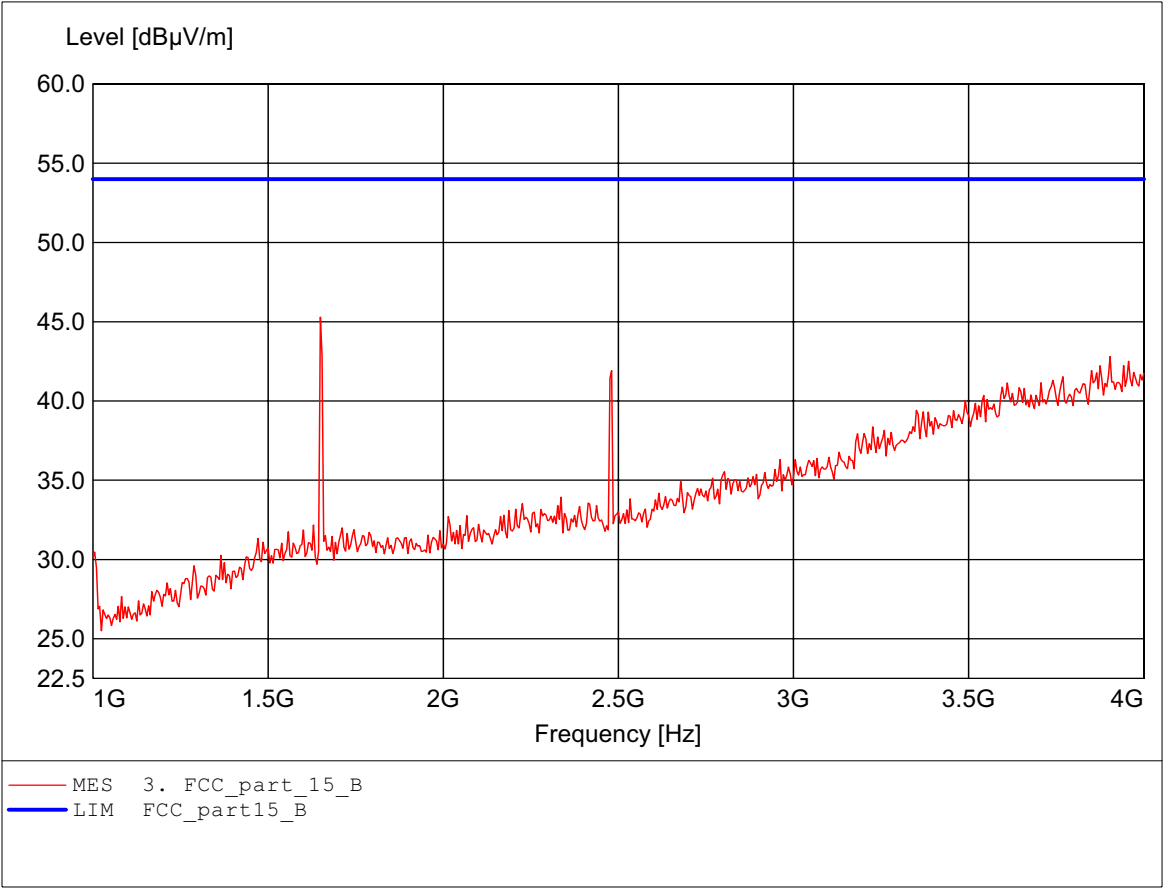

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:1.649GHz Emax:40.43dBμV/m RBW: 1 MHz

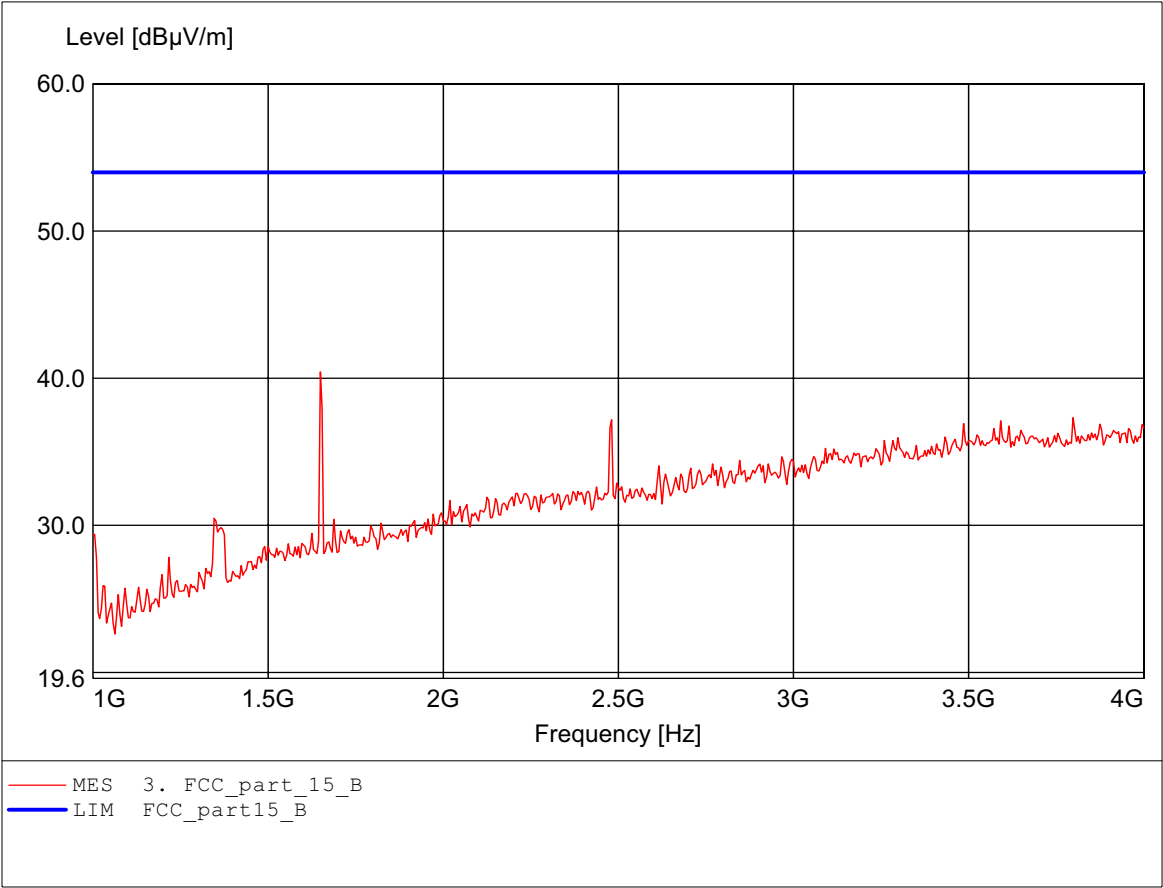

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:7.776GHz Emax:45.89dBμV/m RBW: 1 MHz

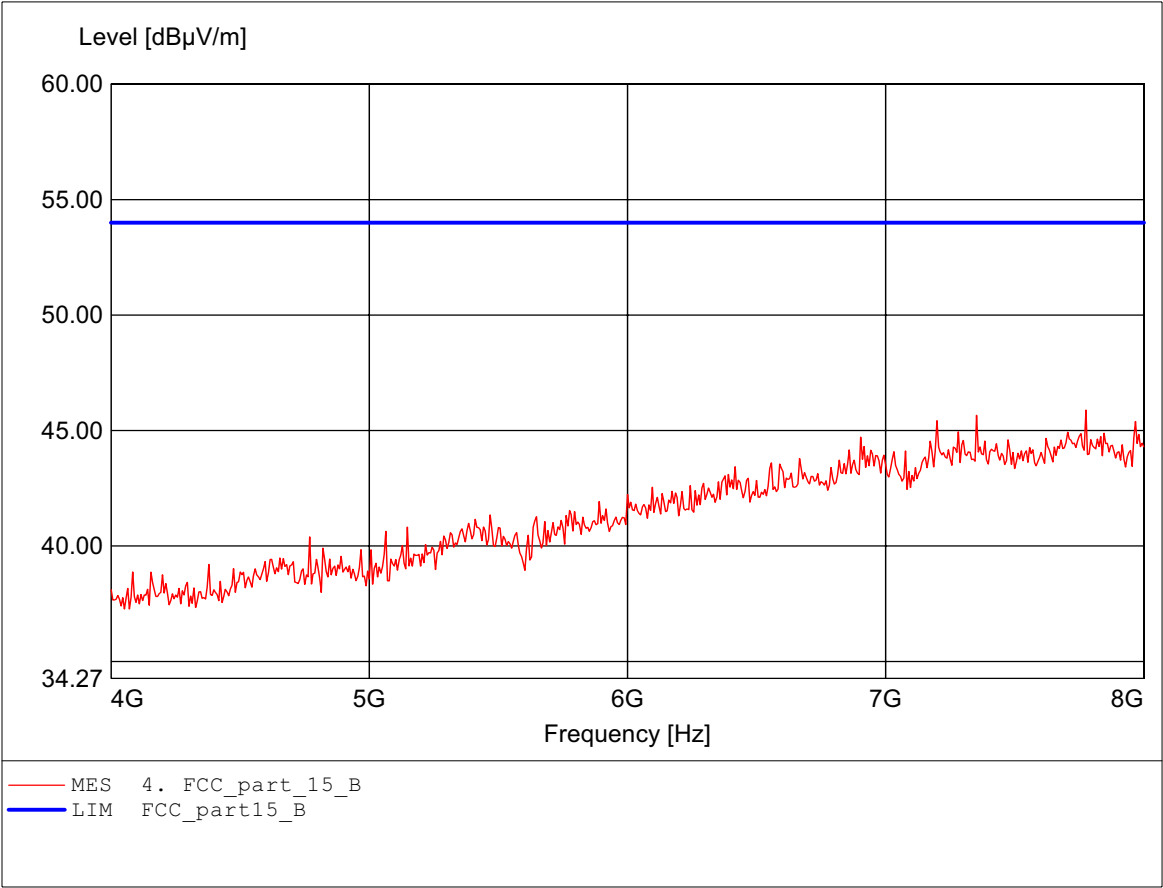

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:6.968GHz Emax:45.41dBμV/m RBW: 1 MHz

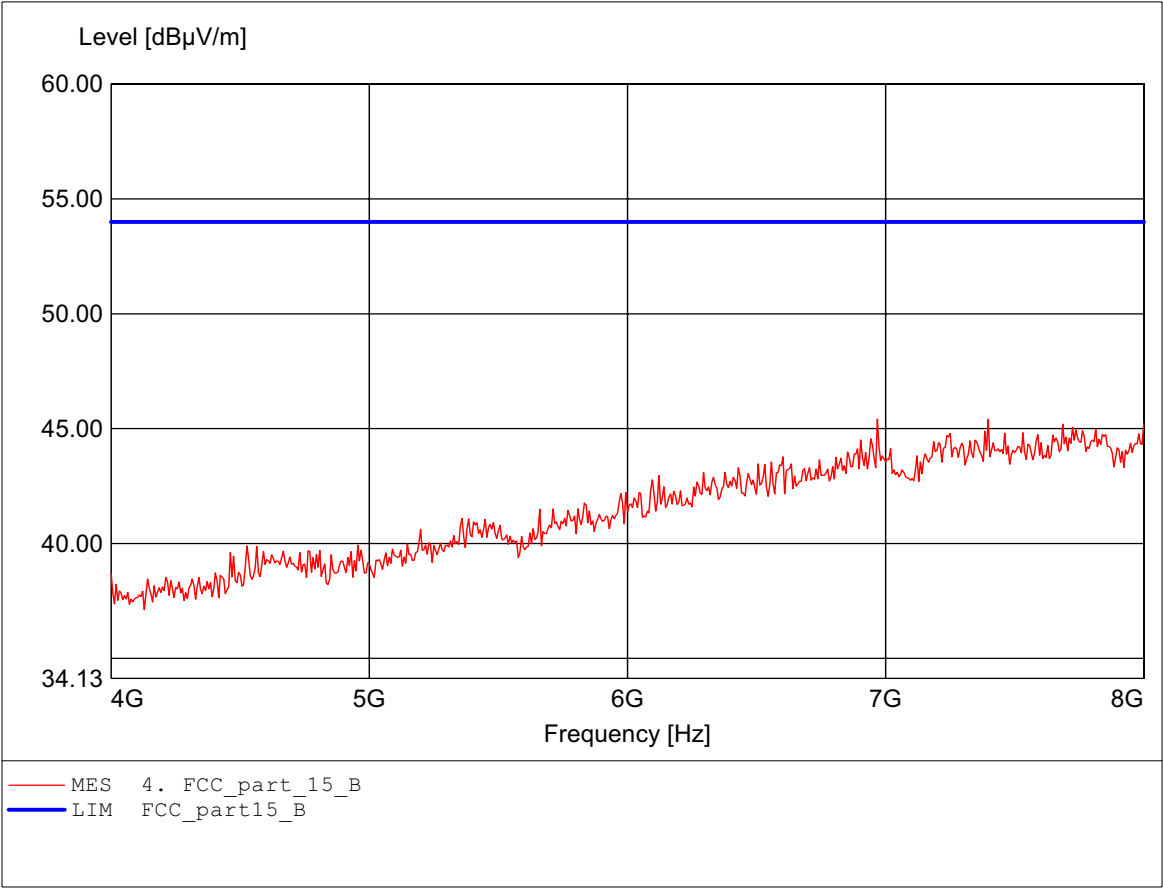

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.564GHz Emax:49.84dBμV/m RBW: 1 MHz

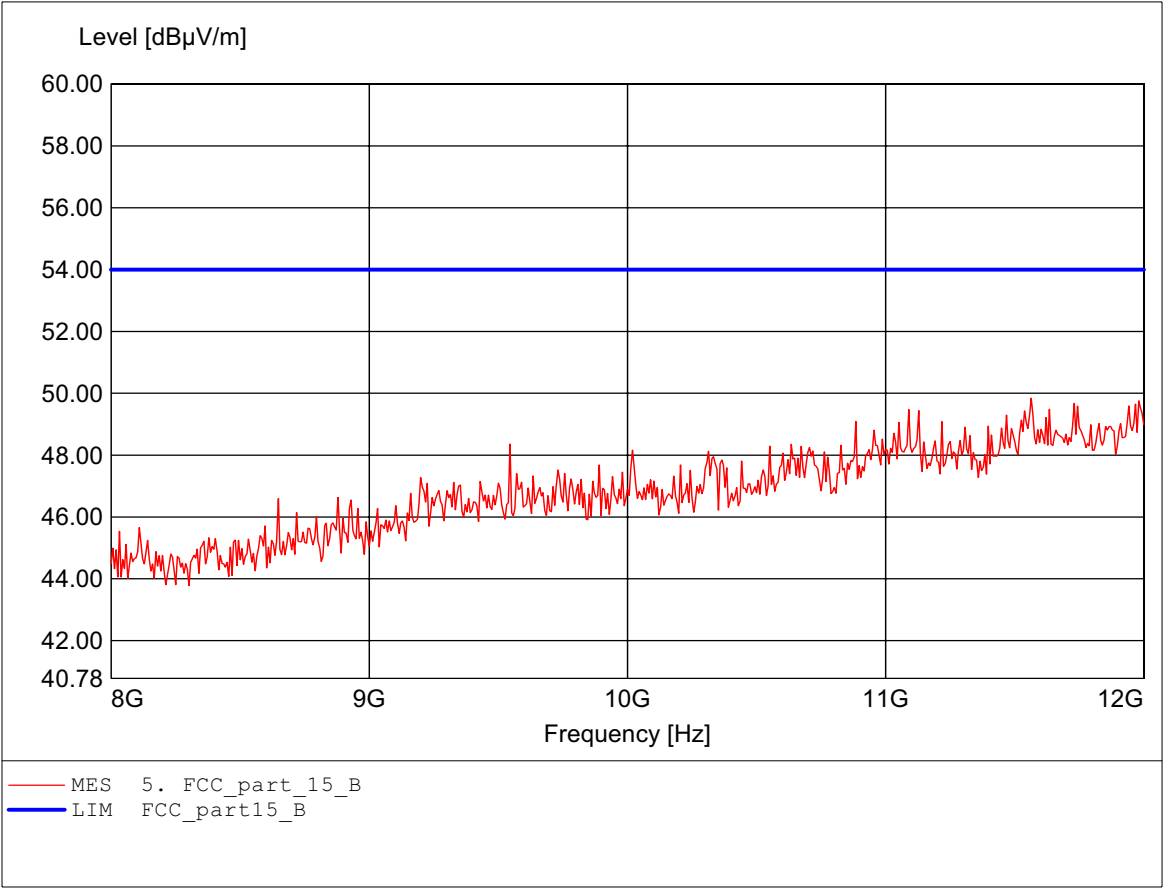

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:11.981GHz Emax:50.14dBμV/m RBW: 1 MHz

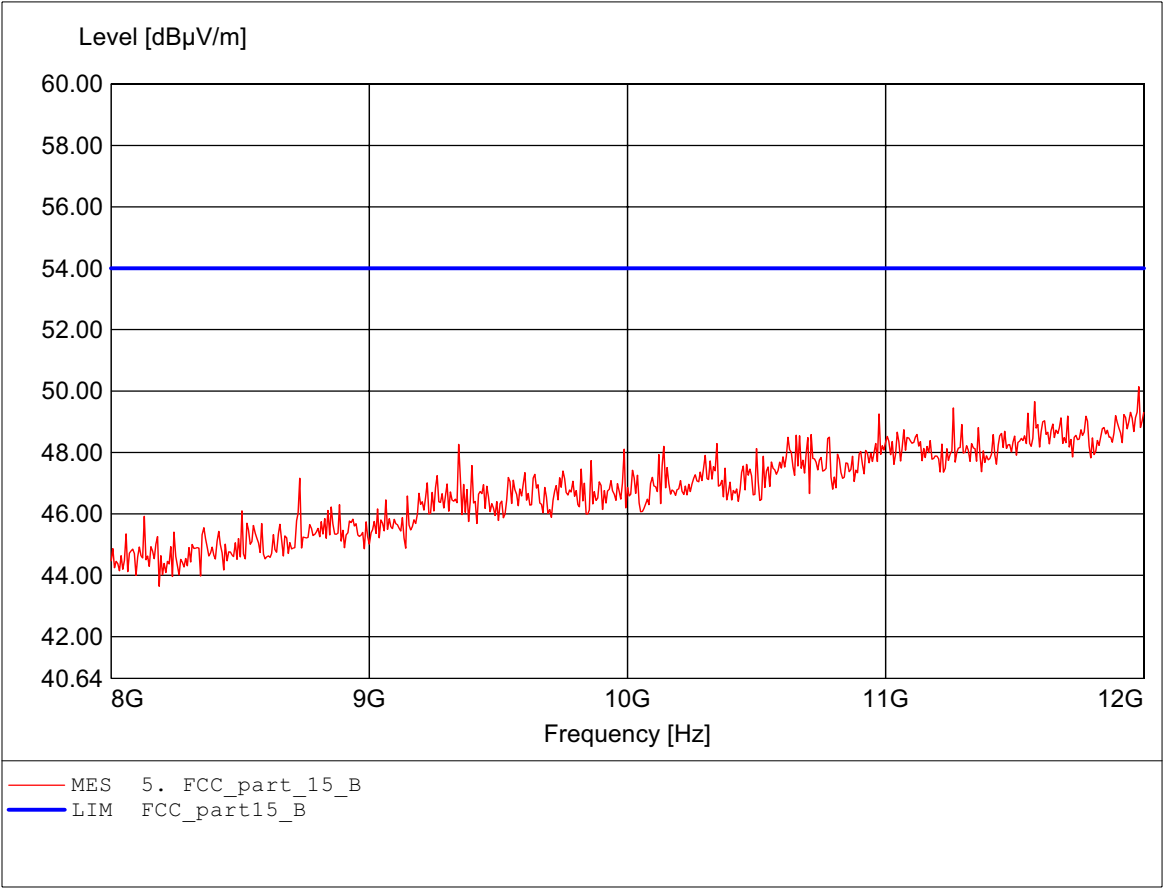

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.702GHz Emax:51.14dBμV/m RBW: 1 MHz

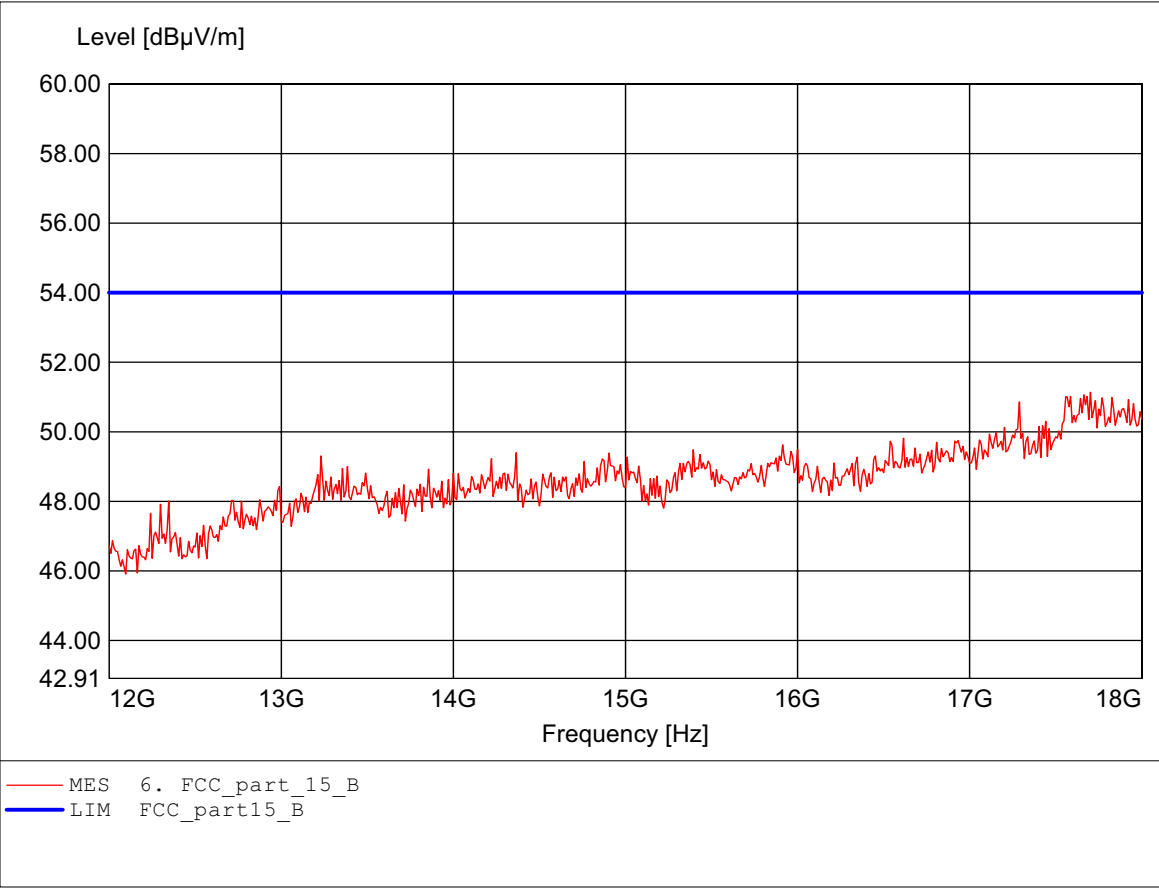

Field Strength under normal conditions


FCC RULES PART 15, SUBPART B

Order Number : W6M20609-7424 ch78
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
according to subpart B
Comment 1: Dist.: 3m, Ant.: HL25, ampl.
Freq:17.837GHz Emax:52.13dBμV/m RBW: 1 MHz

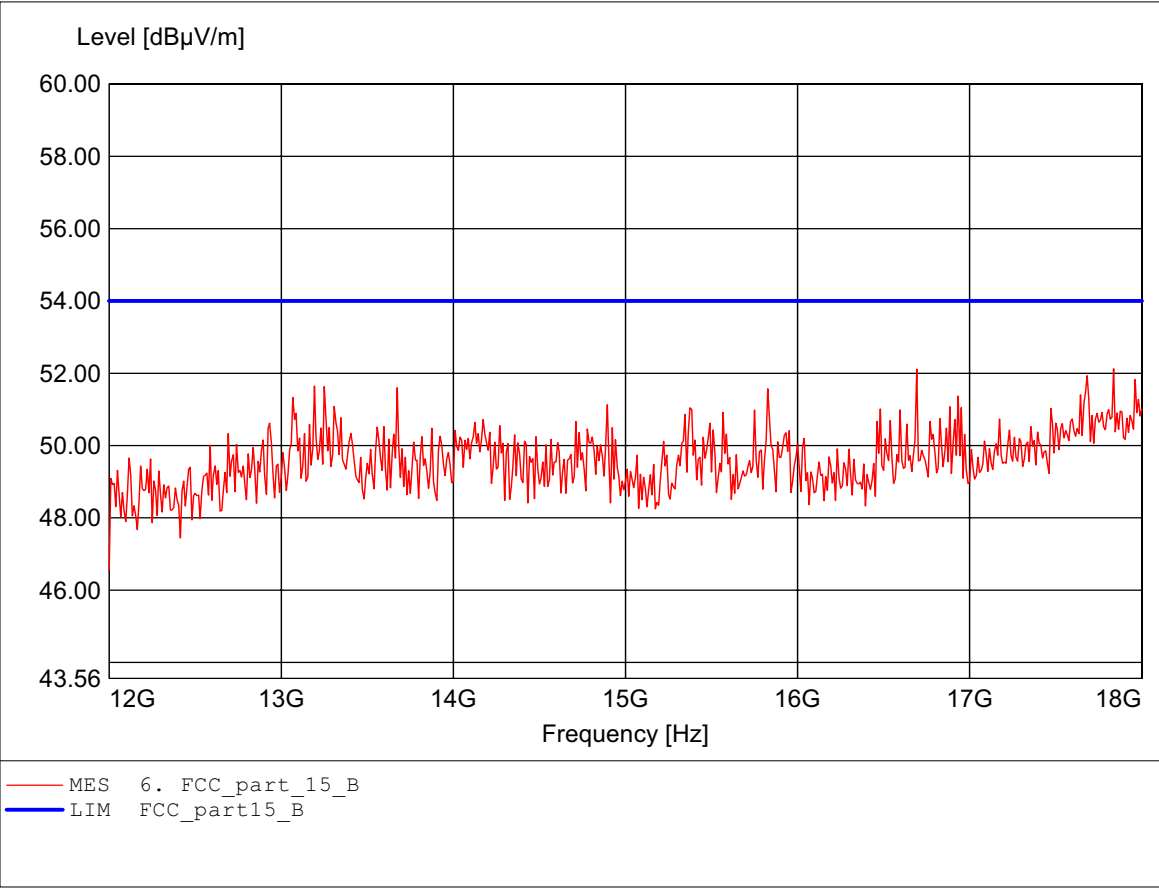

Spurious emissions under normal conditions
in accordance to the CISPR 22


Order Number: W6M20609-7424
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
Test Specification: Fully Anechoic Chamber
Comment 1: Dist.: 3m, Ant.: HK 116 , Peak detector
Freq:150.261MHz Emax:24.79dBµV/m RBW: 100 kHz

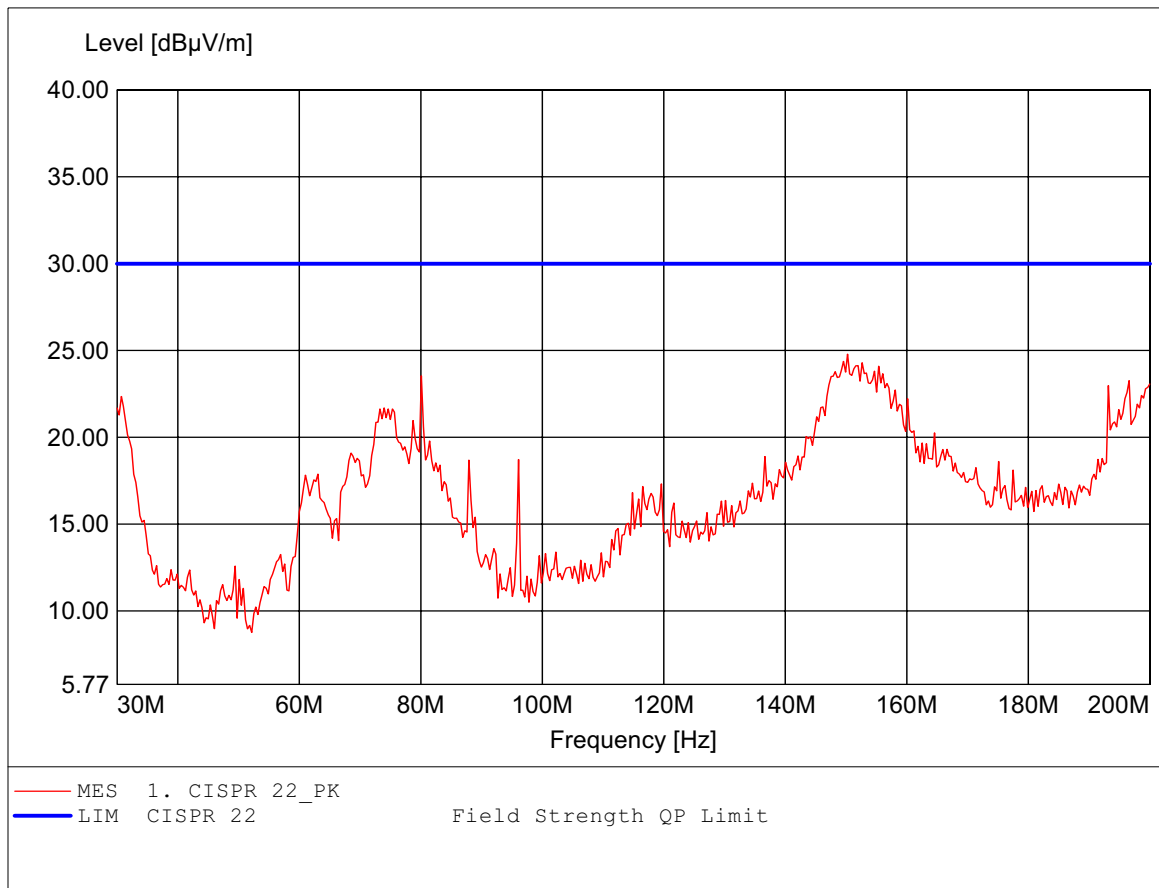

Spurious emissions under normal conditions


in accordance to the CISPR 22

Order Number: W6M20609-7424
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
Test Specification: Fully Anechoic Chamber
Comment 1: Dist.: 3m, Ant.: HK 116 , Peak detector
Freq: 96.092MHz Emax: 27.49dBµV/m RBW: 100 kHz

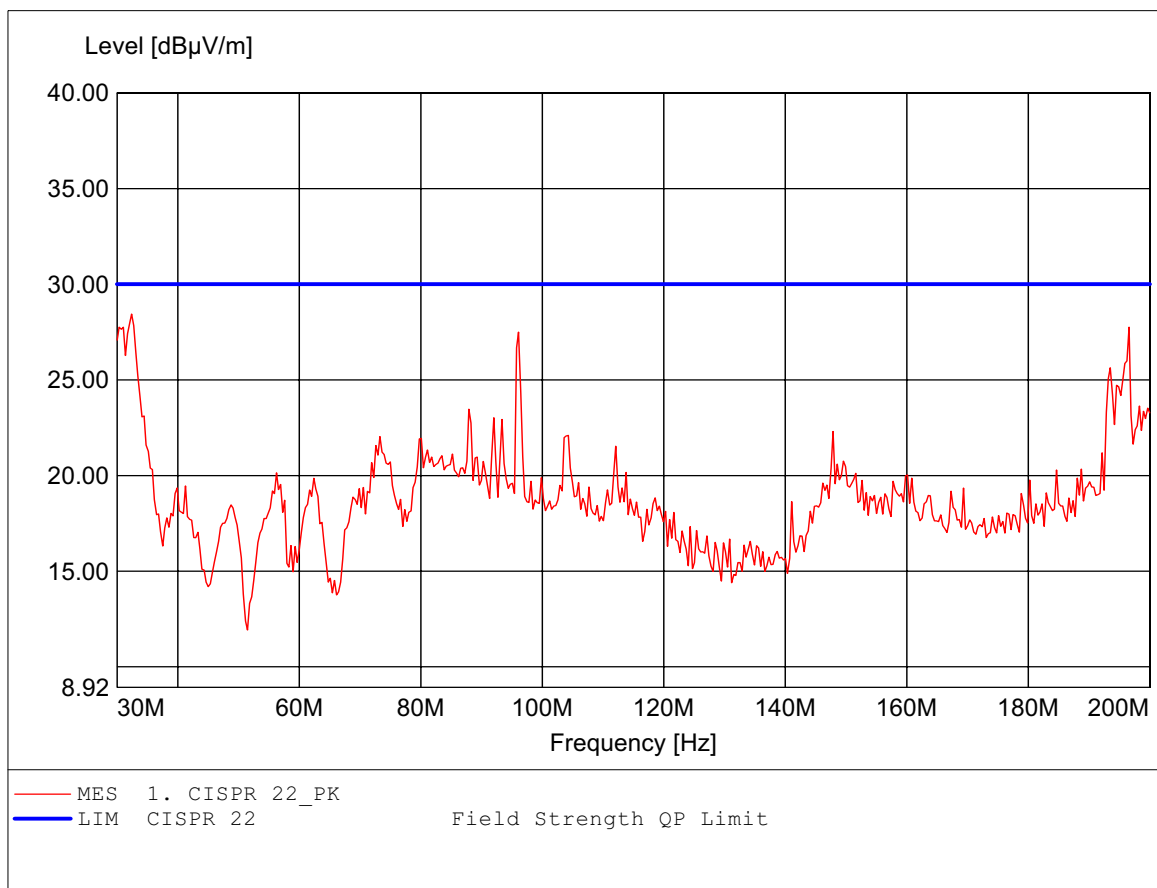


Spurious emissions under normal conditions
in accordance to the CISPR 22

Order Number: W6M20609-7424
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
Test Specification: Fully Anechoic Chamber
Comment 1: Dist.: 3m, Ant.: HL 223 , Peak detector
Freq:943.888MHz Emax:31.29dBμV/m RBW: 100 kHz

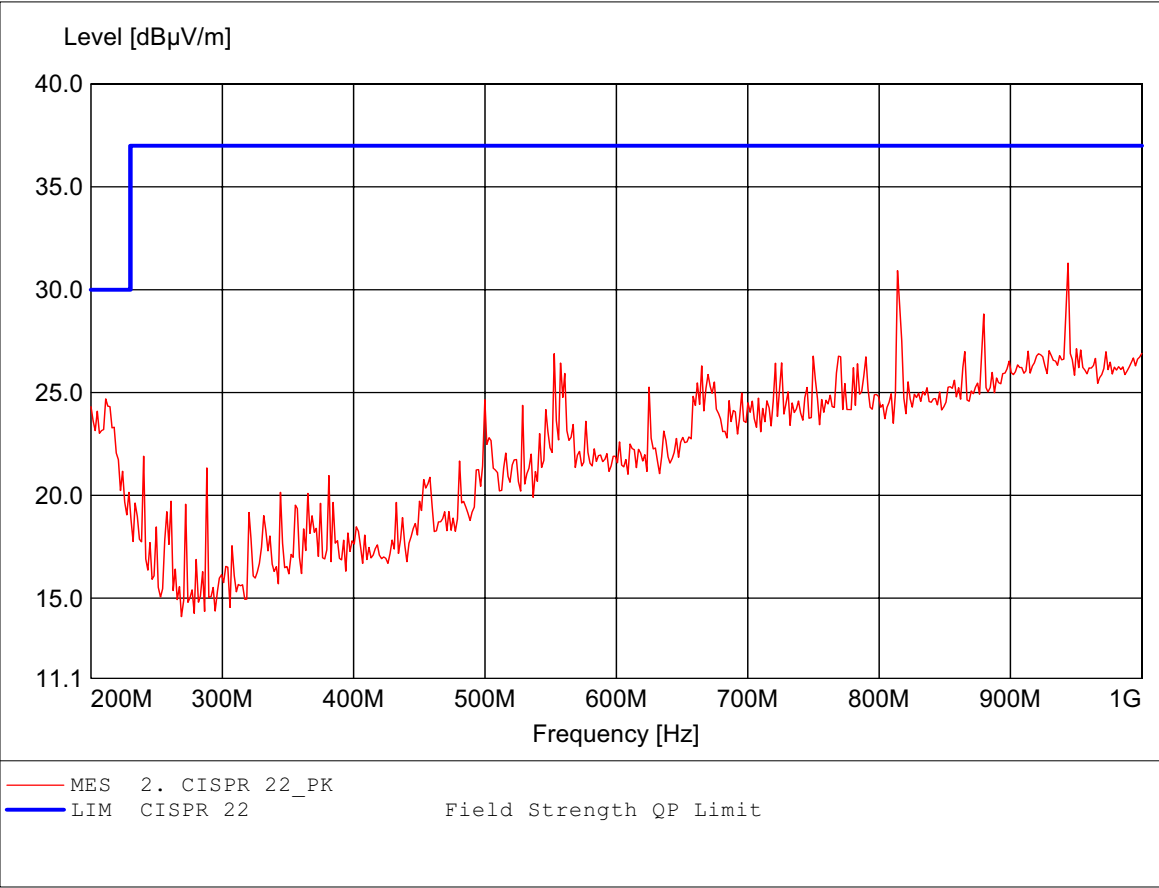

Spurious emissions under normal conditions
in accordance to the CISPR 22

Order Number: W6M20609-7424
Test Site / Operator: ETS / Michael
Temperature: Temp.: 23.9°C
Test Specification: Fully Anechoic Chamber
Comment 1: Dist.: 3m, Ant.: HL 223 , Peak detector
Freq:943.888MHz Emax:30.06dBµV/m RBW: 100 kHz

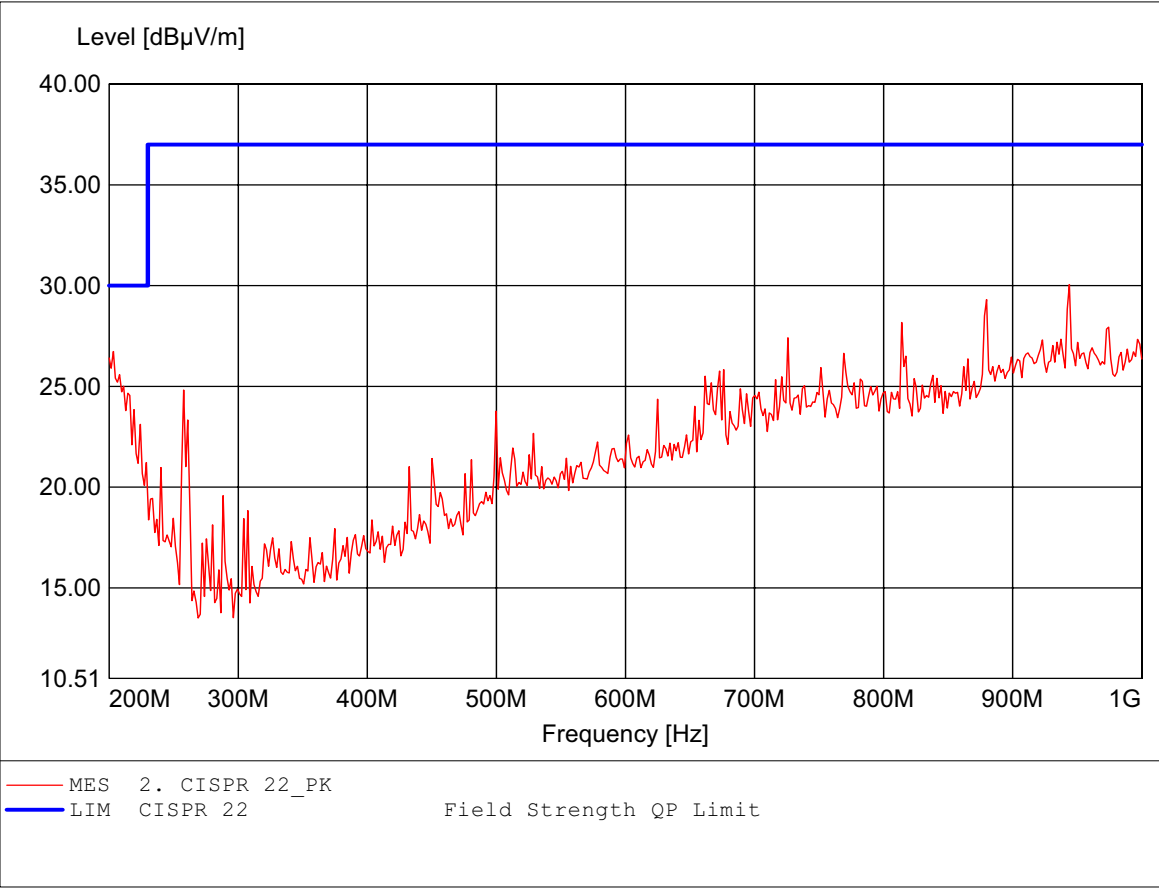

Registration number: W6M20609-7424-P-15

FCC ID : T9JRN41

Appendix I


Power Line Conducted Emission

The measurement diagrams plots attached below are preliminary wideband scan with a average and quasi peak detector and for reference only. The final test results are listed on section 3.13

EMI voltage test in the ac-mains according to FCC PART 15

CLASS B

Order Number: W6M20609-7424
Operating Condition: Tnom: 23.9°C
Test Site: ETS
Operator: Michael
Test Specification: V-network: ESH3-Z5 N

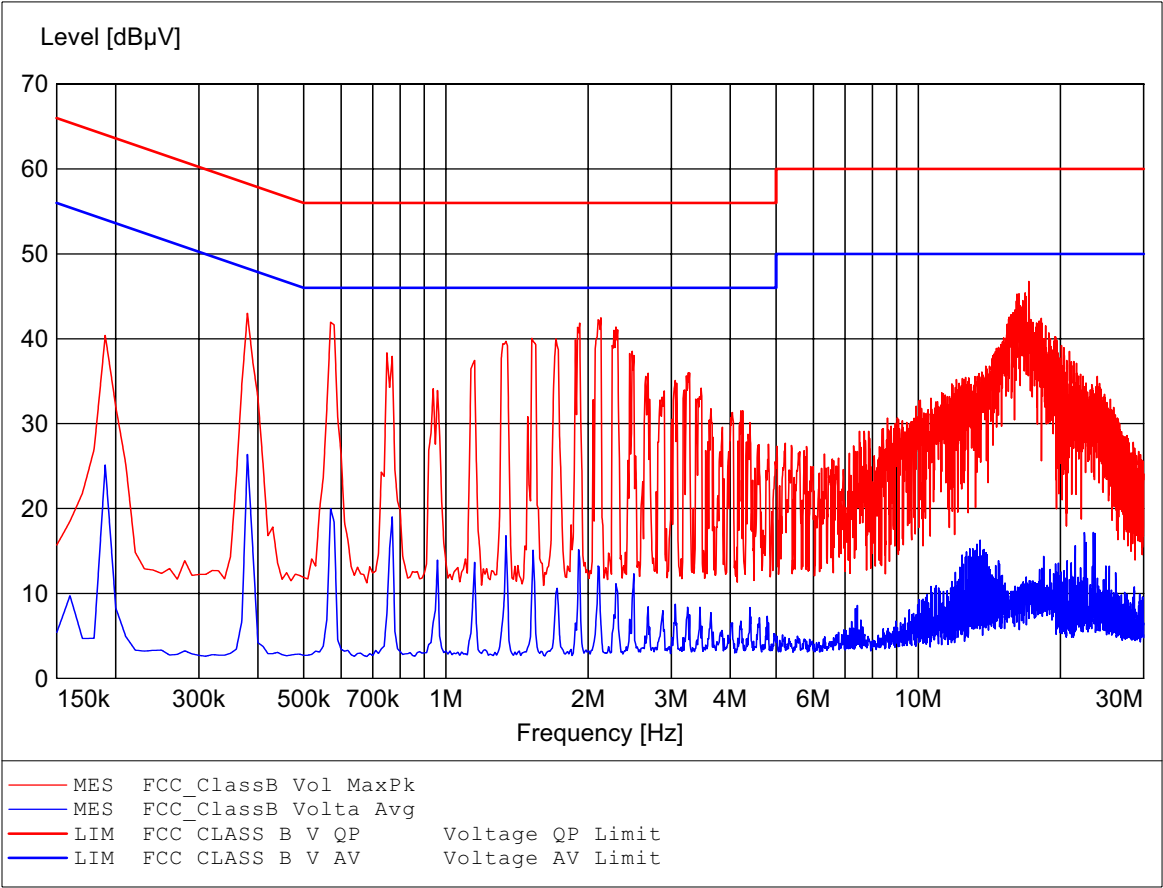

EMI voltage test in the ac-mains according to FCC PART 15

CLASS B

Order Number: W6M20609-7424
Operating Condition: Tnom: 23.9°C
Test Site: ETS
Operator: Michael
Test Specification: V-network: ESH3-Z5 L1

