

Test Report No.: PSZ-QSZ2510291415RF09


Band 4:

802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,639.063	60.25	68.20	7.95	44.56	H	349.4	1.00
12	5,739.690	101.10			44.60	H	88	1.00
13	5,926.875	59.97	68.20	8.23	44.45	H	359.1	1.00

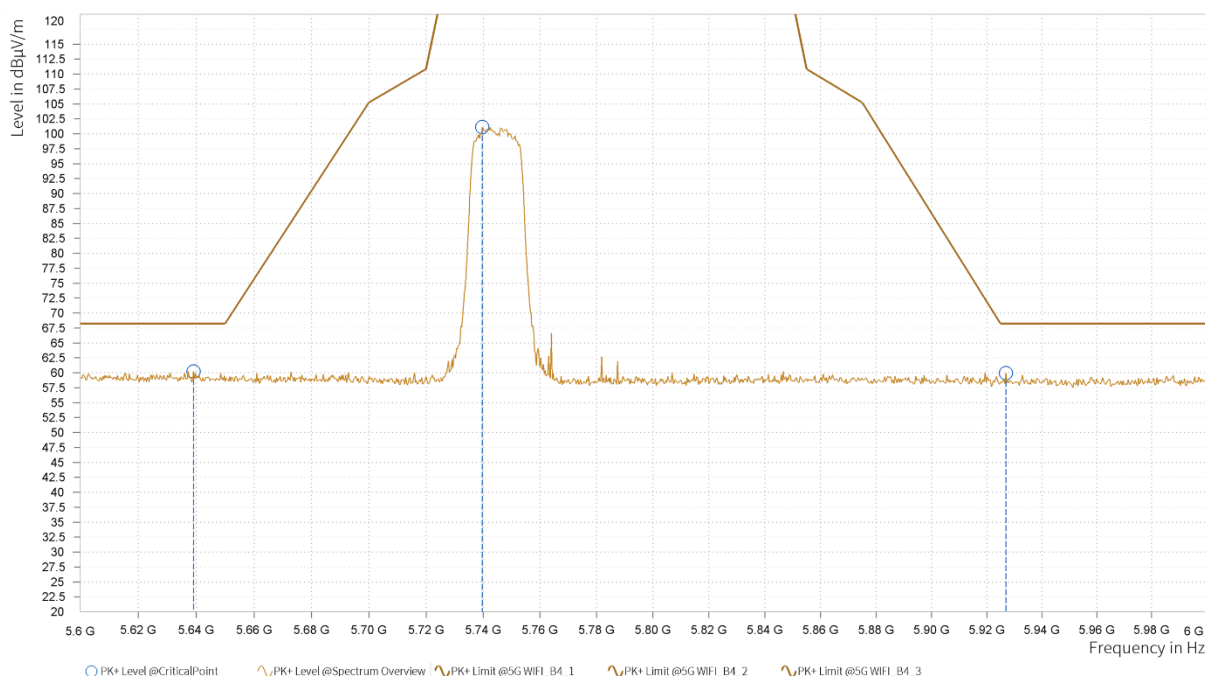

Boomwave Test (Shenzhen)
Co., Ltd.


Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: PSZ-QSZ2510291415RF09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,629.688	60.03	68.20	8.17	44.34	V	11.4	2.00
12	5,744.060	102.52			44.50	V	89.2	1.00
13	5,935.500	59.61	68.20	8.59	44.35	V	359	2.00

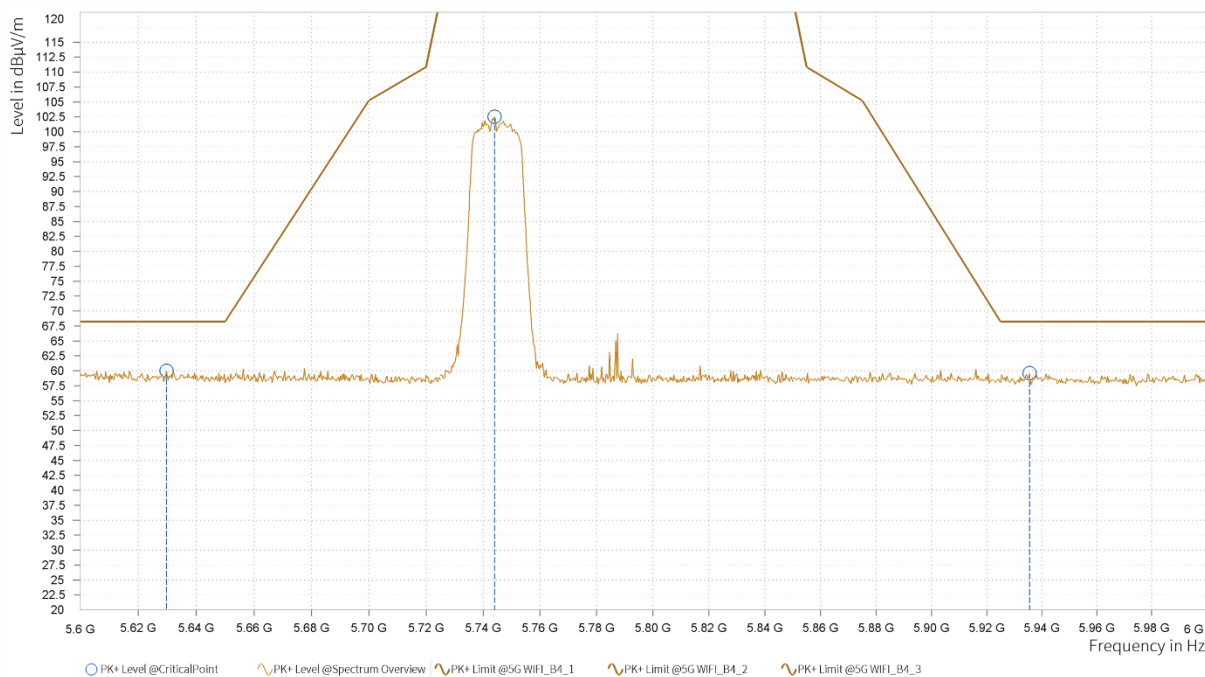

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09


5G WIFI-RU

802.11ax (40MHz)(RU484):

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,610.313	59.41	68.20	8.79	44.55	H	356.4	1.00
11	5,812.500	86.45			44.84	H	89.2	1.00
12	5,998.125	58.96	68.20	9.24	44.43	H	327.1	1.00

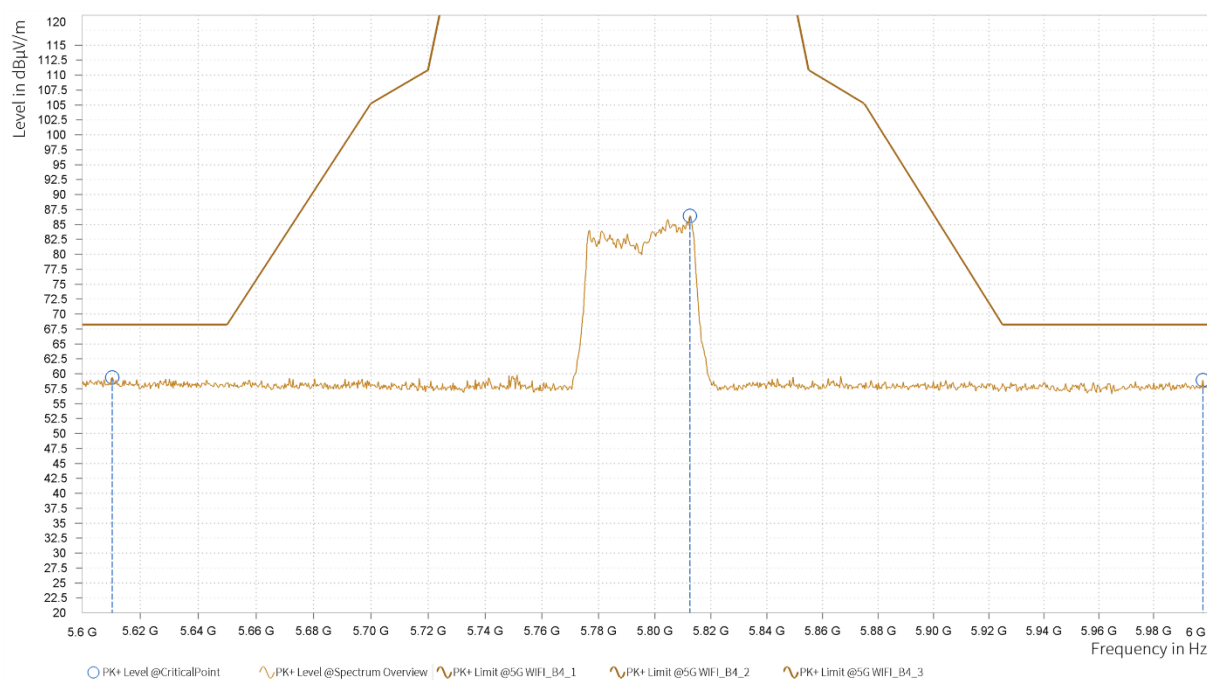


Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,624.375	59.72	68.20	8.48	44.33	V	1	1.00
11	5,780.938	91.19			44.63	V	90.4	1.00
12	5,972.625	59.36	68.20	8.84	44.25	V	186.1	2.00

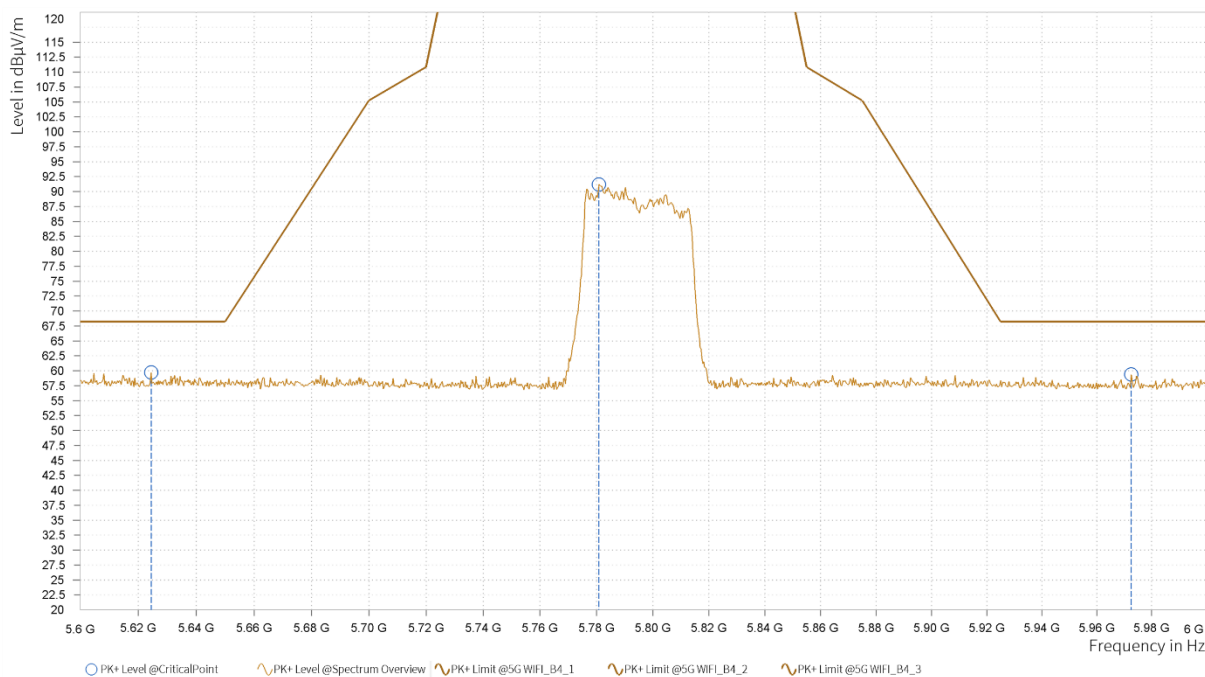

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 5260MHz: Fundamental frequency.

RADIATED EMISSION

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

Band 3

802.11a:


CHANNEL	TX Channel 140	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	49.885	23.22	40.00	16.78	-9.95	H	287.4	1.00	120.000
1	146.594	27.40	43.50	16.10	-15.29	H	73.8	2.00	120.000
1	215.173	22.13	43.50	21.37	-11.26	H	4.9	1.00	120.000
1	301.843	27.41	46.00	18.59	-7.39	H	287.4	1.00	120.000
1	482.796	20.32	46.00	25.68	-3.97	H	1	2.00	120.000
1	628.830	23.44	46.00	22.56	-2.32	H	359	2.00	120.000

REMARKS:

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Limit value- Emission level.

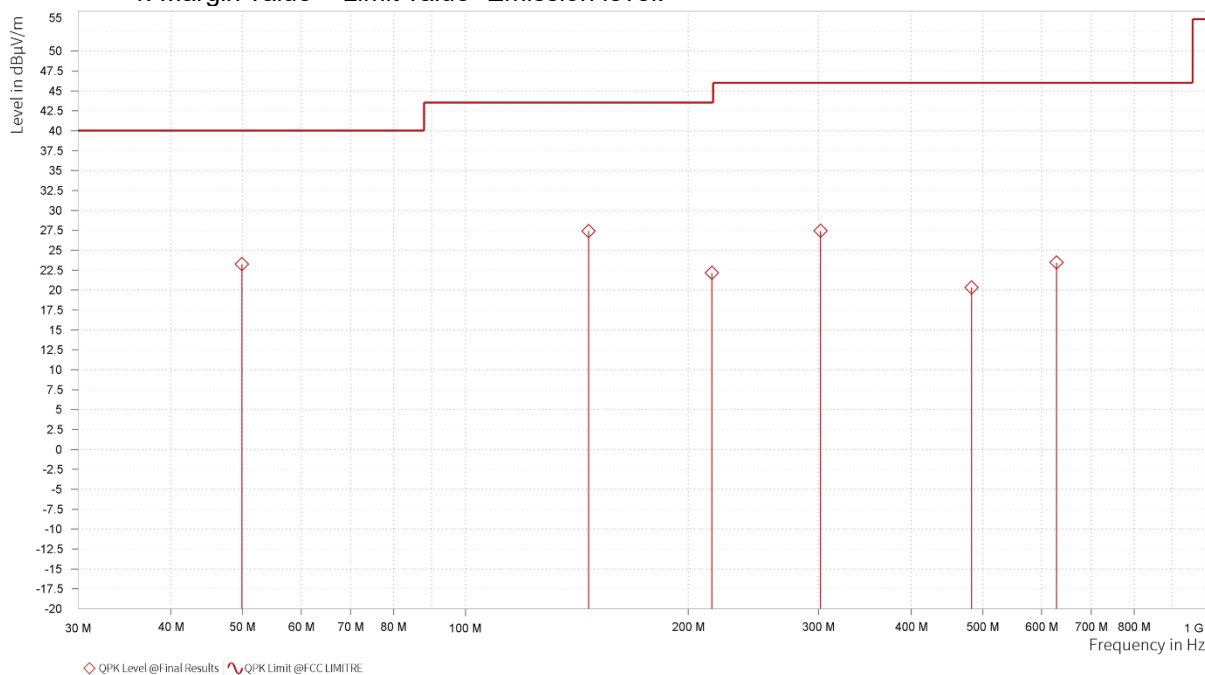

Test Report No.: PSZ-QSZ2510291415RF09


CHANNEL	Channel 140	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	44.890	26.30	40.00	13.70	-10.26	V	141.4	1.00	120.000
1	102.168	20.99	43.50	22.51	-12.18	V	141.4	1.00	120.000
1	144.169	19.29	43.50	24.21	-15.40	V	141.4	1.00	120.000
1	260.957	22.82	46.00	23.18	-8.86	V	216.1	2.00	120.000
1	359.461	17.54	46.00	28.46	-5.49	V	295.7	1.00	120.000
1	642.798	22.98	46.00	23.02	-2.41	V	1	1.00	120.000

REMARKS:

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Limit value- Emission level.

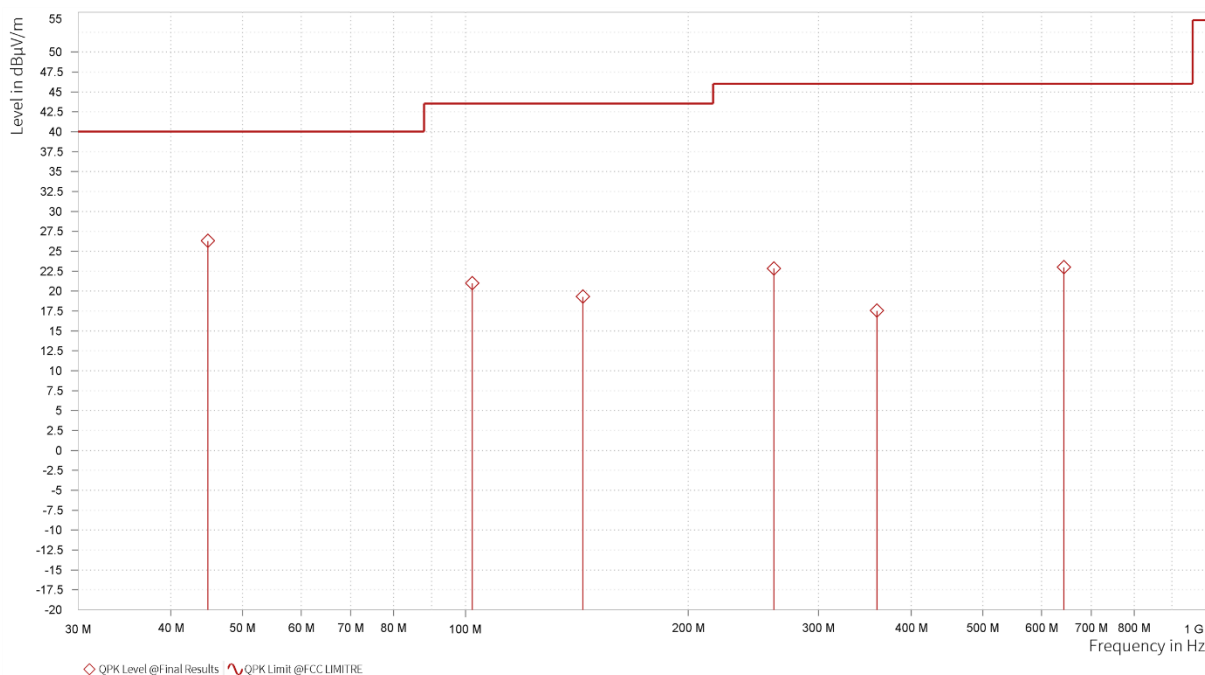

Test Report No.: PSZ-QSZ2510291415RF09
ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.


Band 1

802.11ax(80MHz)


CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,420.000	44.64	74.00	29.36	34.57	54.00	19.43	7.42	H	359	1.00
3	15,630.000	50.17	74.00	23.83	38.56	54.00	15.44	10.41	H	108.5	2.00

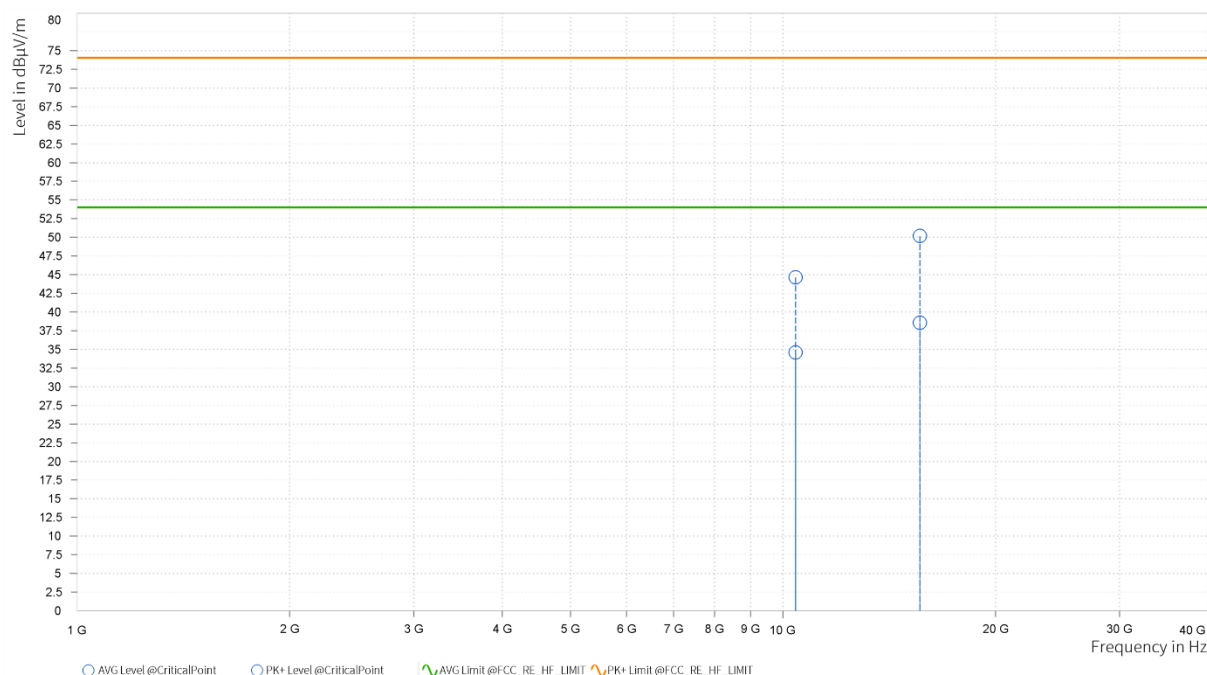

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,420.000	45.50	74.00	28.50	34.65	54.00	19.35	7.42	V	359.1	1.00
3	15,630.000	49.12	74.00	24.88	38.58	54.00	15.42	10.41	V	359.1	1.00

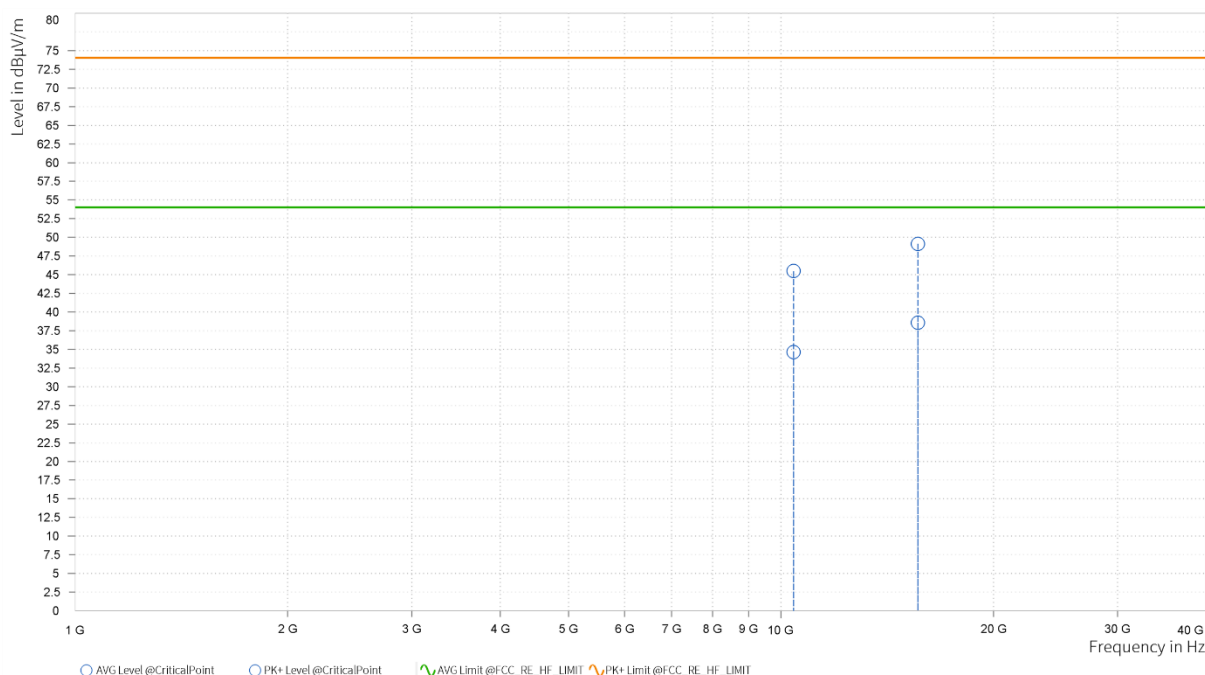

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5180MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09


5G WIFI RU

802.11ax(20MHz)_RU106

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,400.000	45.88	74.00	28.12	34.37	54.00	19.63	7.31	H	263.9	2.00
3	15,600.000	48.30	74.00	25.70	37.92	54.00	16.08	10.42	H	93.7	1.00

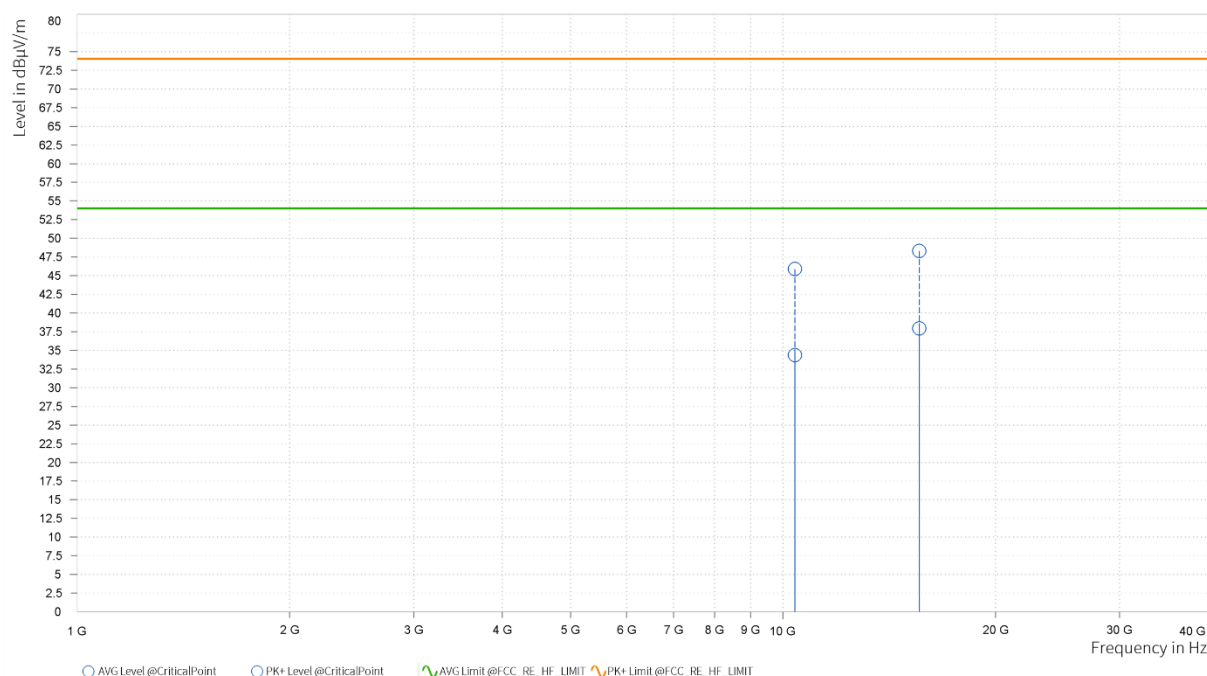


Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,400.000	44.69	74.00	29.31	34.31	54.00	19.69	7.31	V	0.9	2.00
3	15,600.000	48.47	74.00	25.53	37.62	54.00	16.38	10.42	V	0.9	2.00

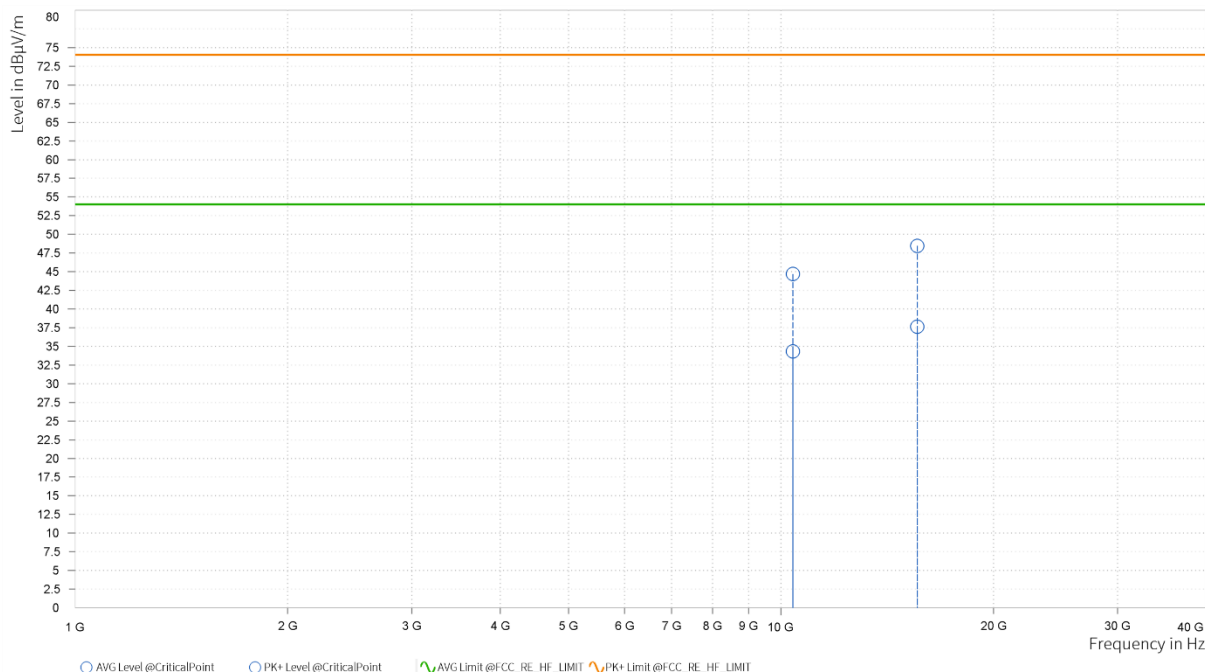

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5180MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09


Band 2:

802.11ax (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,580.000	45.68	74.00	28.32	35.23	54.00	18.77	7.47	H	359	2.00
3	15,870.000	49.33	74.00	24.67	39.00	54.00	15.00	10.49	H	142.7	1.00

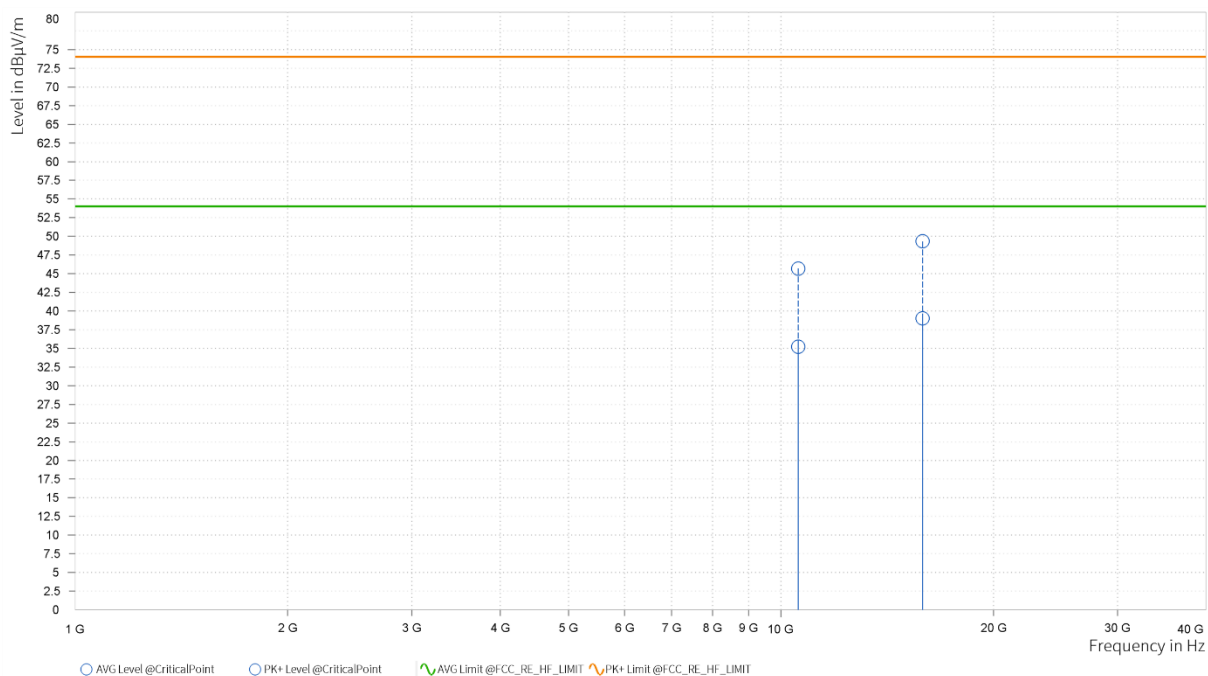


Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,580.000	46.73	74.00	27.27	35.70	54.00	18.30	7.47	V	1	2.00
3	15,870.000	49.65	74.00	24.35	38.89	54.00	15.11	10.49	V	1	2.00

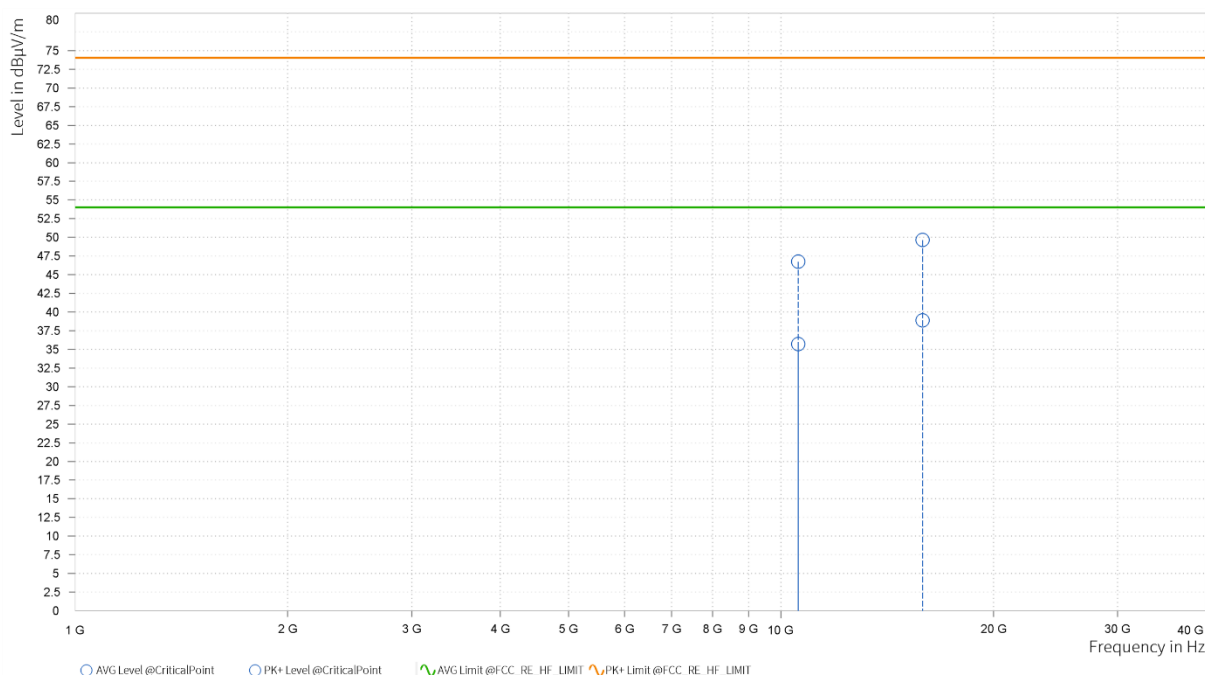
REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5290MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09


5G WIFI RU

802.11ax (20MHz)_RU106

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,600.000	45.73	74.00	28.27	34.92	54.00	19.08	7.37	H	266.2	2.00
3	15,900.000	48.96	74.00	25.04	38.59	54.00	15.41	10.53	H	126.4	2.00

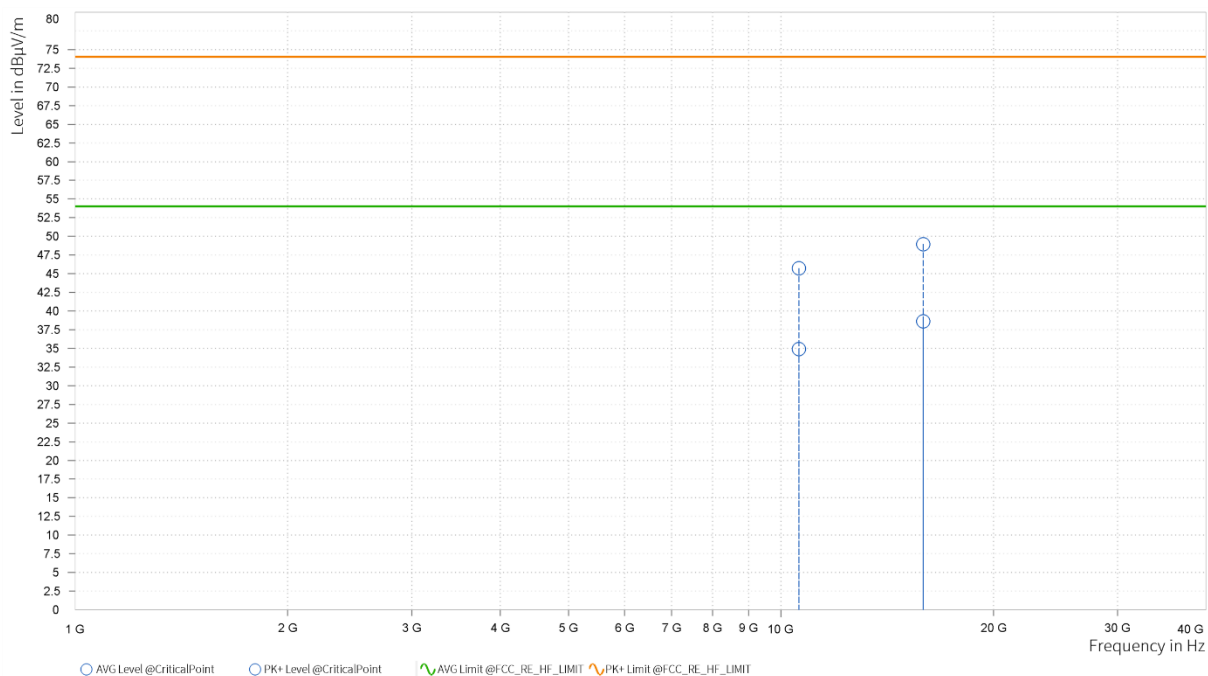


Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	10,600.000	45.22	74.00	28.78	35.17	54.00	18.83	7.37	V	2.6	2.00
3	15,900.000	48.85	74.00	25.15	38.76	54.00	15.24	10.53	V	266.3	2.00

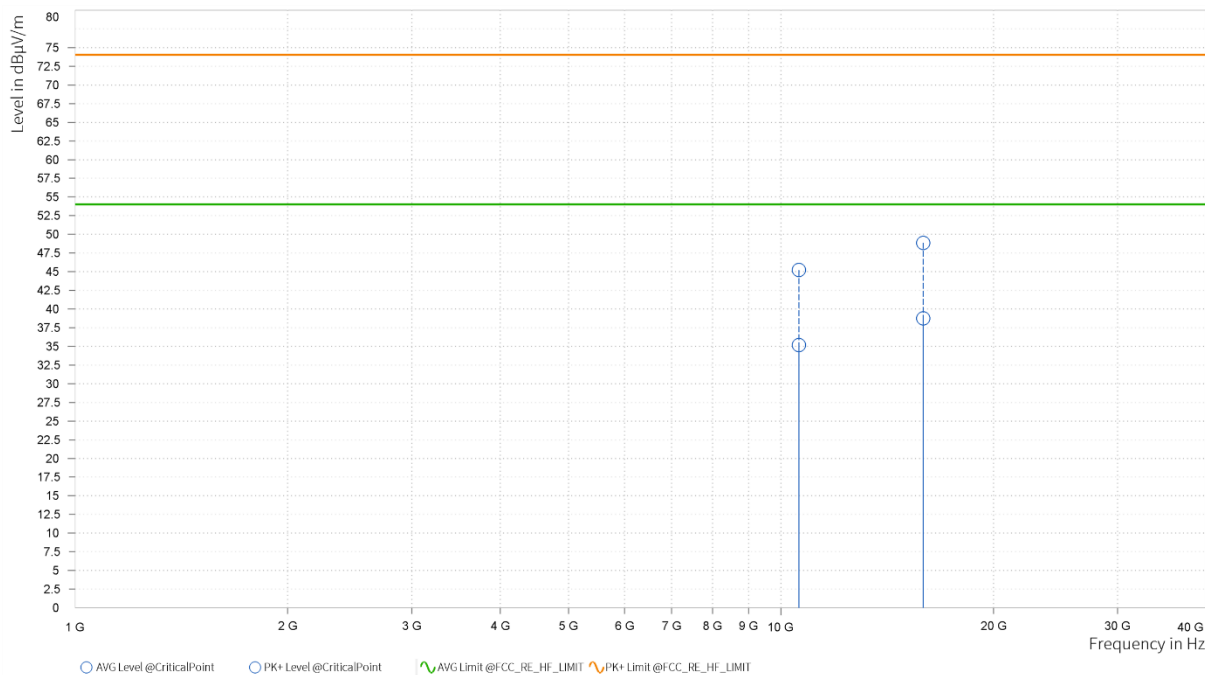

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5290MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09

Band 3

802.11a

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,400.000	45.90	74.00	28.10	36.12	54.00	17.88	8.49	H	359	1.00
3	17,100.000	49.34	74.00	24.66	39.43	54.00	14.57	13.14	H	280.2	1.00



Boomwave Test (Shenzhen)
Co., Ltd.


Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: PSZ-QSZ2510291415RF09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,400.000	47.81	74.00	26.19	36.34	54.00	17.66	8.49	V	359.1	1.00
3	17,100.000	49.38	74.00	24.62	39.37	54.00	14.63	13.14	V	66.7	2.00

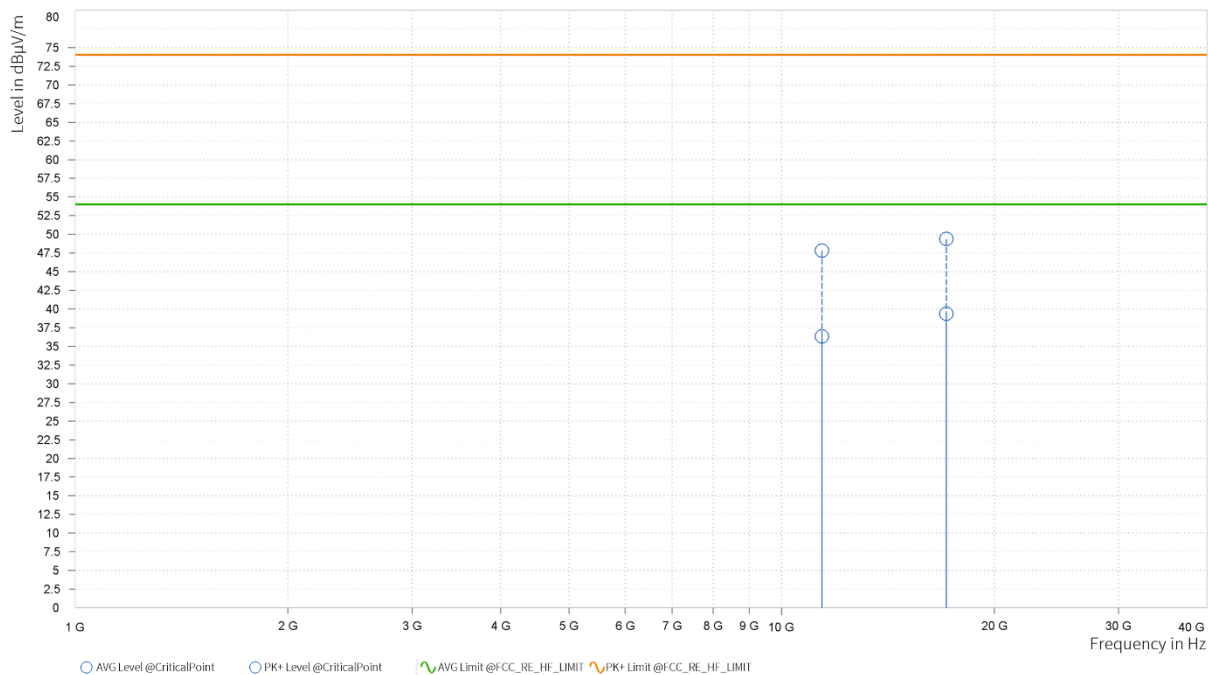

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

Test Report No.: PSZ-QSZ2510291415RF09


5g WIFI RU

802.11ax(20MHz)_RU106

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,440.000	46.22	74.00	27.78	35.76	54.00	18.24	8.70	H	359	2.00
3	17,160.000	50.20	74.00	23.80	38.97	54.00	15.03	13.30	H	127.6	2.00

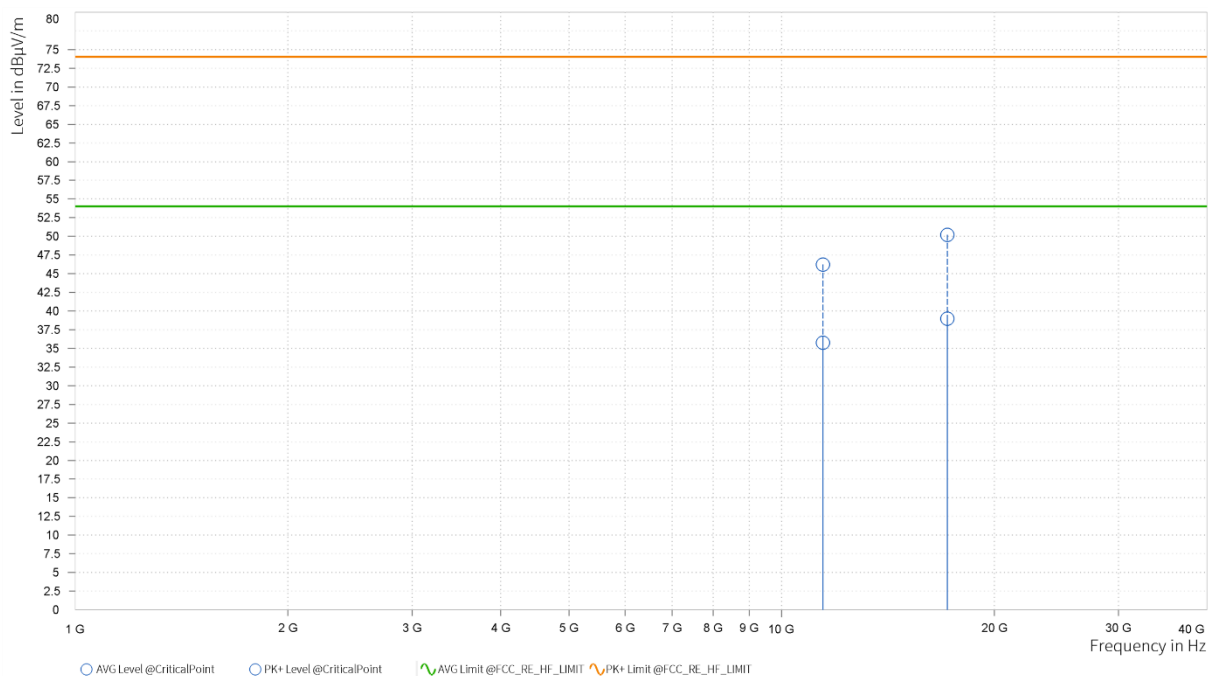

Boomwave Test (Shenzhen)
Co., Ltd.


Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: PSZ-QSZ2510291415RF09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,440.000	47.32	74.00	26.68	35.98	54.00	18.02	8.70	V	0.9	2.00
3	17,160.000	49.74	74.00	24.26	39.07	54.00	14.93	13.30	V	0.9	2.00

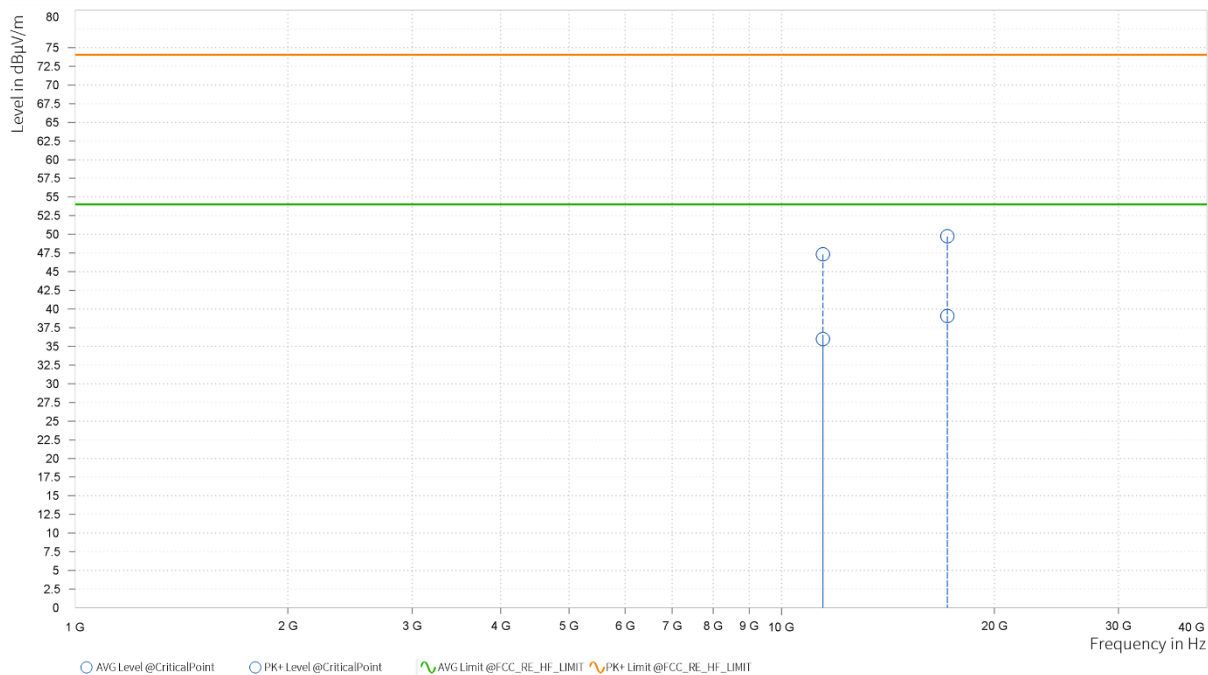

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

Test Report No.: PSZ-QSZ2510291415RF09


Band 4:

802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,490.000	46.55	74.00	27.45	36.55	54.00	17.45	8.86	H	359	2.00
3	17,235.000	50.99	74.00	23.01	39.48	54.00	14.52	13.39	H	31.9	2.00

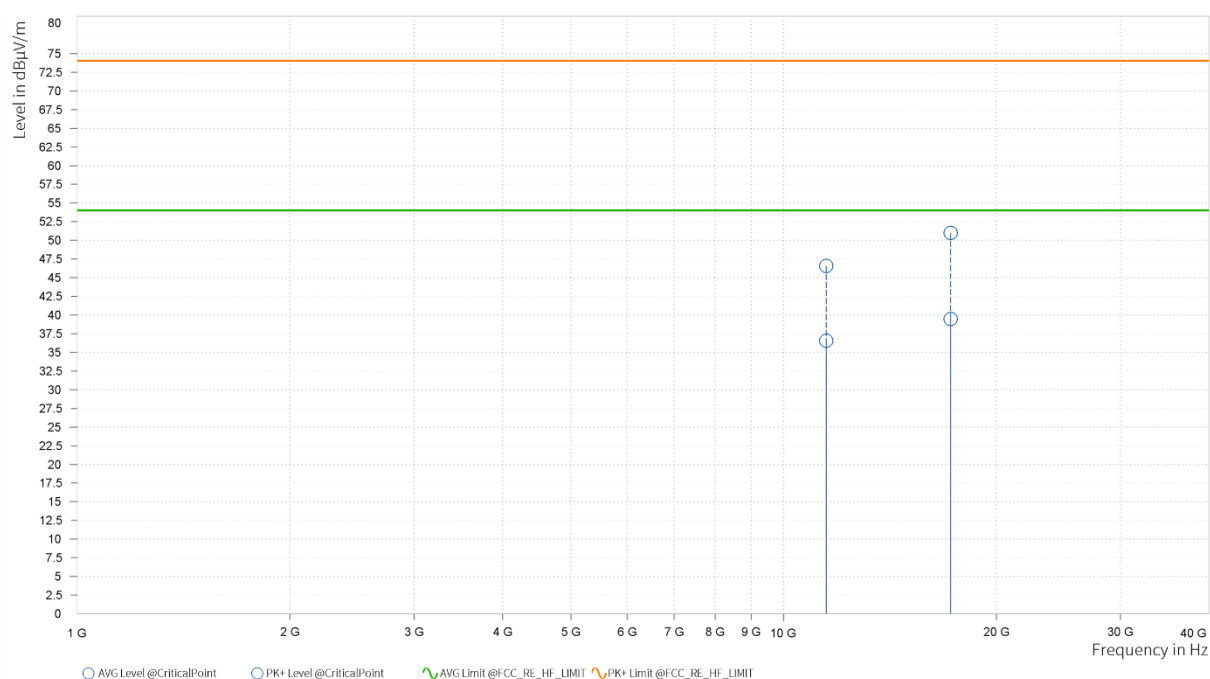

Boomwave Test (Shenzhen)
Co., Ltd.


Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: PSZ-QSZ2510291415RF09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,490.000	47.15	74.00	26.85	36.59	54.00	17.41	8.86	V	118	2.00
3	17,235.000	49.80	74.00	24.20	39.59	54.00	14.41	13.39	V	1.7	2.00

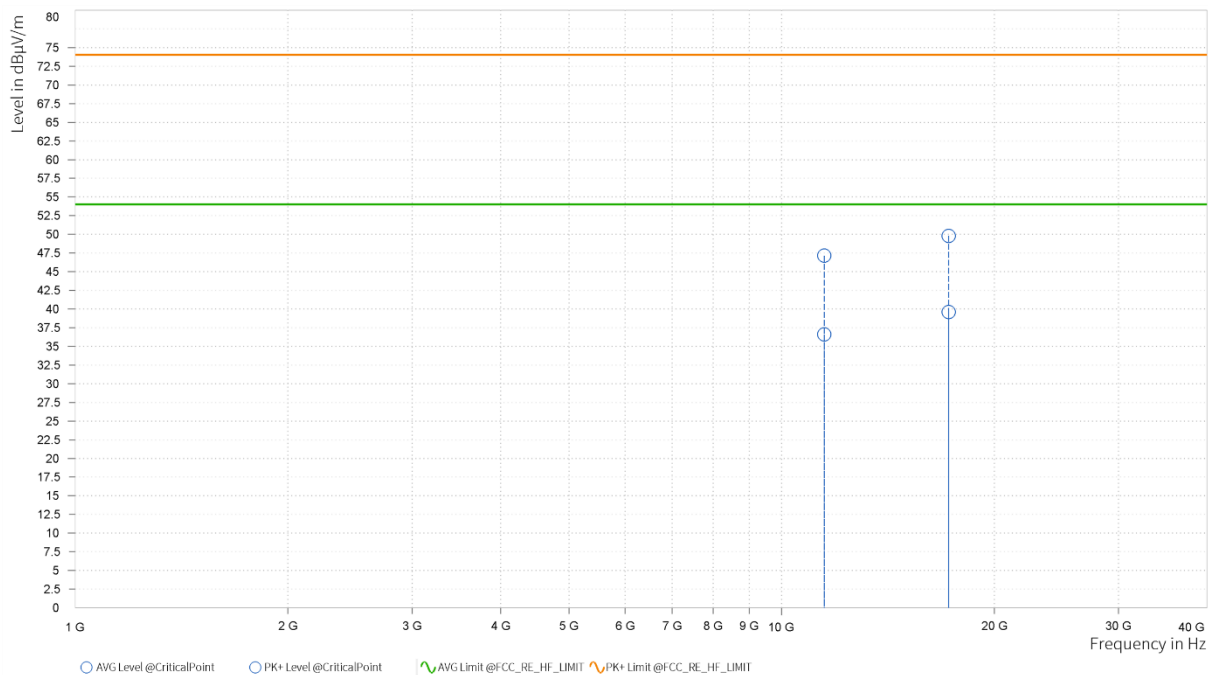

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.

Test Report No.: PSZ-QSZ2510291415RF09

5G WIF RU

802.11ax (40MHz)_RU FULL

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,590.000	47.19	74.00	26.81	36.28	54.00	17.72	8.58	H	265.1	2.00
3	17,385.000	51.09	74.00	22.91	39.72	54.00	14.28	13.47	H	359.1	1.00



Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: PSZ-QSZ2510291415RF09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	11,590.000	46.44	74.00	27.56	36.29	54.00	17.71	8.58	V	0.9	2.00
3	17,385.000	49.73	74.00	24.27	39.68	54.00	14.32	13.47	V	0.9	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value- Emission level.
- 5745MHz: Fundamental frequency.

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

- 1 The lower limit shall apply at the transition frequencies.
- 2 The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
- 3 All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pulse limiter	SCHWARZBECK	VTSD 9561F	01579	2025/7/22	2026/7/21
ESR.EMI TEST RECEIVER	Rohde&SCHWARZ	ESR	101405	2025/6/30	2026/6/29
LISN	SCHWARZBECK	NSLK 8127	01216	2025/8/27	2026/8/26
Cable	Tonscend	/	/	2025/7/22	2026/7/21

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

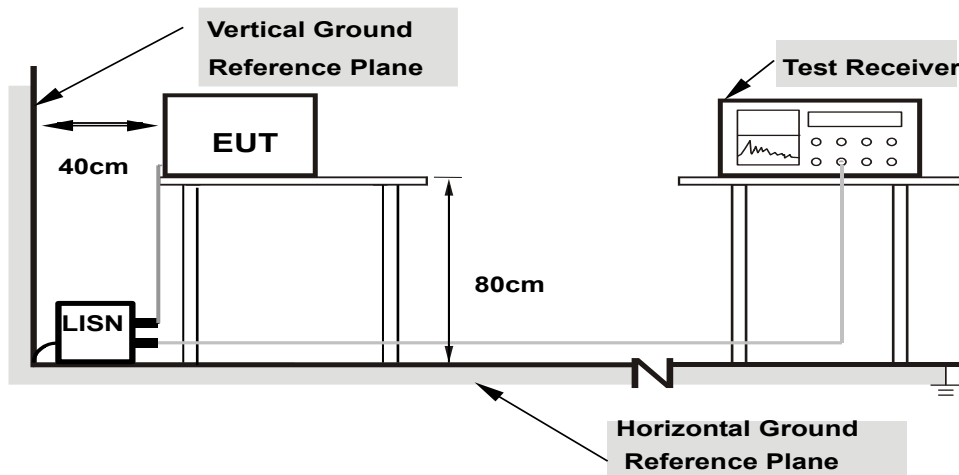

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.7.

3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA			
FREQUENCY RANGE	150KHz ~ 30MHz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH
TESTED BY	Carl Xie		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.150	42.99	66.00	23.01	27.31	56.00	28.69	9.80	L1	9.000
1	0.519	36.38	56.00	19.62	23.39	46.00	22.61	9.75	L1	9.000
1	1.469	25.82	56.00	30.18	14.31	46.00	31.69	9.79	L1	9.000
1	4.313	25.85	56.00	30.15	14.15	46.00	31.85	10.07	L1	9.000
1	10.050	35.25	60.00	24.75	26.25	50.00	23.75	10.99	L1	9.000
1	17.921	39.36	60.00	20.64	28.69	50.00	21.31	13.01	L1	9.000

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and
3. measurement with the average detector is unnecessary.
4. The emission levels of other frequencies were very low against the limit.
5. Margin value = Limit value - Emission level
6. Correction factor = Insertion loss + Cable loss
7. Emission Level = Correction Factor + Reading Value.




FREQUENCY RANGE	150KHz ~ 30MHz	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH
TESTED BY	Carl Xie		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.155	43.14	65.75	22.61	27.22	55.75	28.54	9.80	N	9.000
1	0.528	35.17	56.00	20.83	26.59	46.00	19.41	9.75	N	9.000
1	1.559	24.09	56.00	31.91	15.26	46.00	30.74	9.79	N	9.000
1	3.953	22.36	56.00	33.64	14.60	46.00	31.40	10.04	N	9.000
1	8.250	32.79	60.00	27.21	23.87	50.00	26.13	10.67	N	9.000
1	17.844	37.22	60.00	22.78	26.89	50.00	23.11	12.98	N	9.000

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and
3. measurement with the average detector is unnecessary.
4. The emission levels of other frequencies were very low against the limit.
5. Margin value = Limit value - Emission level
6. Correction factor = Insertion loss + Cable loss
7. Emission Level = Correction Factor + Reading Value.

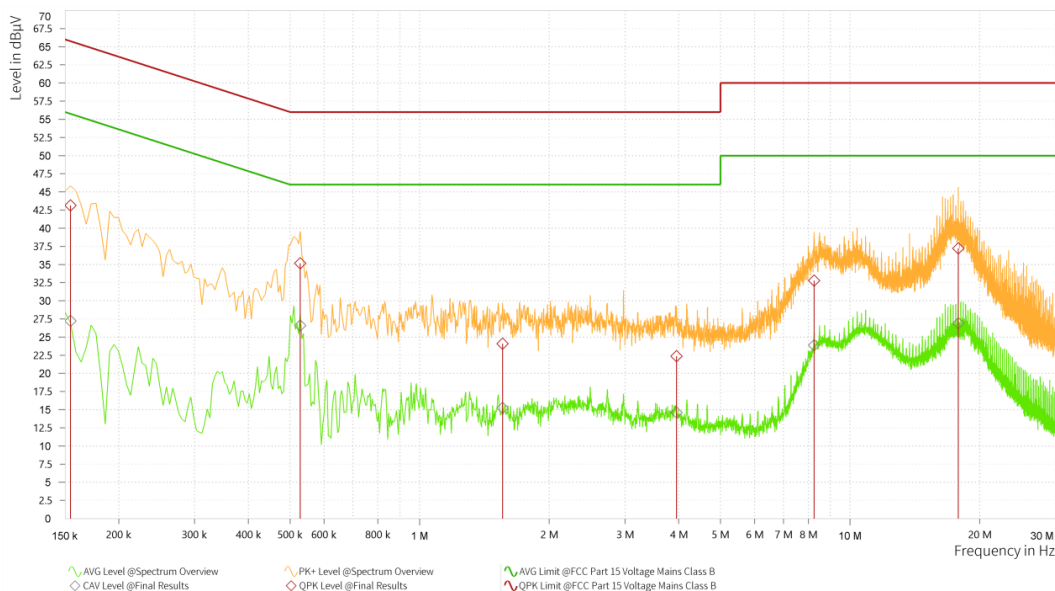



Test Report No.: PSZ-QSZ2510291415RF09

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSZ-QSZ2510291415RF09

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--END--