


NOTES UNLESS OTHERWISE SPECIFIED:

1. OVERALL FEATURE TOLERANCE FROM NOMINAL IGES GEOMETRY TO BE $\pm 0.15\text{MM}$ UNLESS CRITICAL TOLERANCE INDICATED.
2. ALL GATES AND EJECTION PINS TO BE PLACED ON INTERNAL SURFACES.
3. ALL EXTERNAL SURFACES TO BE FREE OF ALL FOREIGN PARTICLES, FLOW LINES, WELD LINES, GATE BLUSH, FLASH, SINK OR ANY OTHER TOOLING/MOLDING DEFECTS.
4. MATERIALS:

FOOT: RUBBER
5. COLOR, FINISH, SEE CMF DOCUMENTS
6. DRAFT ANGLES TO BE 1° FOR UNTEXTURED SURFACES AND 2.5° FOR TEXTURED SURFACES
7. SCULPTED SURFACES REFER TO 3D FILE PROVIDED BY ROKU
8. ONE HALF OF A FEATURE DIMENSIONED ACROSS A CENTER LINE AND/OR A SYMMETRICAL CALL-OUT IS EQUAL TO THE DIMENSION SHOWN DIVIDED BY 2 AND ITS TOLERANCE DIVIDED BY 2
9. GATE TRIM TO BE 0.5 MAXIMUM, IF NO FUNCTIONAL IMPACT IN ASSEMBLY
10. NO SINK OR DEPRESSIONS TO BE VISIBLE ON APPEARANCE SURFACES.
11. APPEARANCE SURFACES TO BE FREE OF COSMETIC DEFECTS, INCLUDING, BUT NOT LIMITED TO SPLOY, PARTICLES, BURNED PLASTIC/MARKS, AND SIMILAR IMPERFECTIONS.
12. PART TO BE FREE OF MOLD RELEASE
13. MOLD DESIGN TO MINIMIZE EJECTION MARKS, GATE BLUSH, FLOW LINES AND WELD MARKS. MOLD CONSTRUCTION TO CONFORM TO GOOD MOLDING INDUSTRY STANDARDS PRACTICE AS STATED IN THE CURRENT EDITION OF STANDARDS AND PRACTICES OF PLASTIC CUSTOM MOLDERS BY THE SOCIETY OF THE PLASTICS INDUSTRY, INC.
14. PARTING LINE MISMATCH AND FLASH NOT TO EXCEED 0.15 TOTAL.
15. MOLD TO BE PROPERTY OF ROKU AND SHALL BE PERMANENTLY MARKED WITH "ROKU" AND ITS TOOL #.
16. EJECTOR PIN, PARTING LINE, AND GATE LOCATIONS MUST BE APPROVED BY ROKU DESIGN ENGINEERING PRIOR TO MOLD FABRICATION. EJECTOR PIN MARKS TO BE FLUSH TO 0.1 DEPRESSED, AND 0.10 FLASH IS ALLOWED.
17. BURR AND FLASH: ALL INTERNAL BURRS AND FLUSHES ARE ALLOWED UP TO 0.5MM HIGH MAX. AS LONG AS THE BURRS OR FLASHES DO NOT TOUCH WITH ANY OTHER STEADY OR MOVING COMPONENTS AND CAUSE RELIABILITY OR FUNCTIONAL IMPACT, AND AS LONG AS THEY CANNOT BE SEEN ANYWHERE OUTSIDE OF THE PRODUCT ASSEMBLY.
18. DIMENSIONS MARKED WITH " " ARE FOR INCOMING AND FIRST ARTICLE INSPECTION.
-DIMENSIONS MARKED TO ARE FOR FIRST ARTICLE INSPECTION.
-DIMENSIONS MARKED TO ARE FOR TOOLING MEASUREMENT
19. INSPECTION DIMENSIONS SHOULD BE MEASURED WITH FOLLOWING EQUIPMENT:
---PROJECTOR:
---CALIPER:

REVISIONS				
REV.	DESCRIPTION	DRAWN BY	APPROVED	DATE
001	INITIAL RELEASE	TANNER		9/9/15

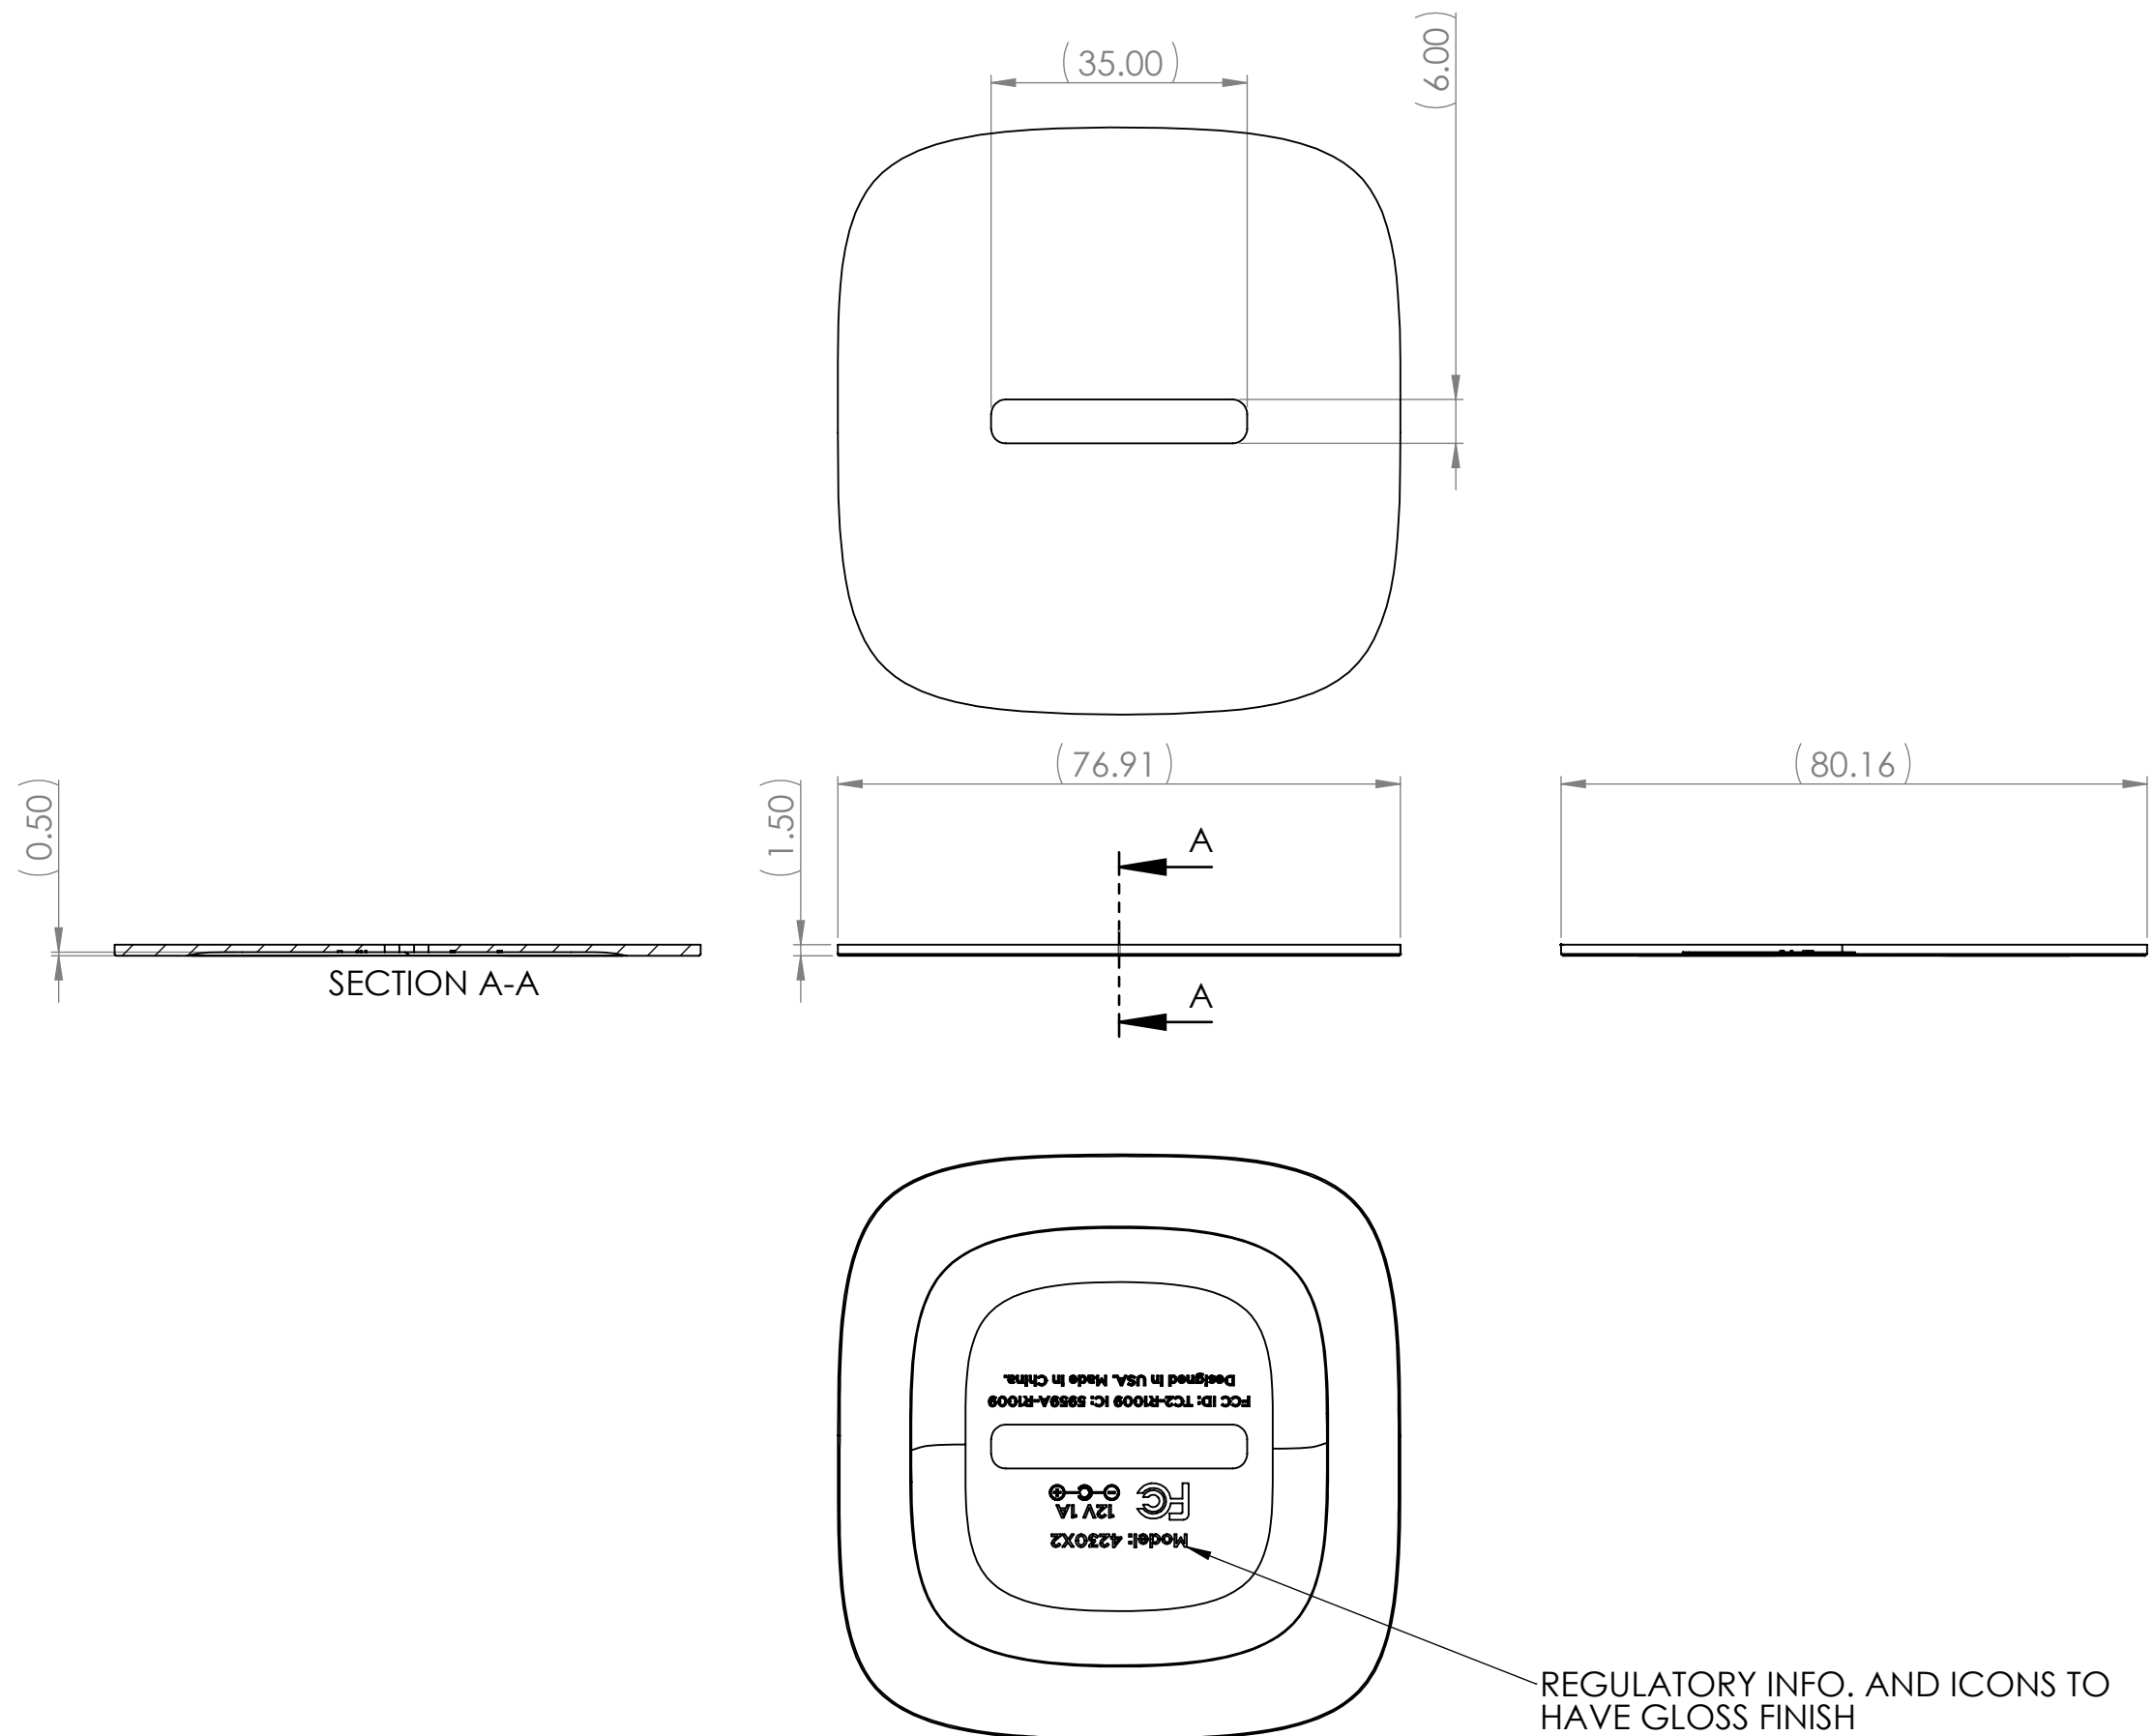

DO NOT SCALE		NAME		DATE		bould design	
GENERAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)		DRAWN		TANNER		09/09/15	
.X ± 0.2mm		CHECKED				CLIENT:ROKU	
DECIMALS: .XX ± 0.1mm		ENG APPR.				mustang_foot_4230x2_001	
.XXX ± 0.05mm		MFG APPR.				DESCRIPTION	
ANGLES: ± 0.5°		Q.A.				MUSTANG FOOT 4230X2 LITEON	
UNITS:							
MATERIAL		THIRD ANGLE PROJECTION				SIZE PART NO.:	
FINISH						C	
VOLUME mm^3						REV 001	
						SCALE: 1:1 WEIGHT: SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF IS PROHIBITED.

NOTES UNLESS OTHERWISE SPECIFIED:

1. OVERALL FEATURE TOLERANCE FROM NOMINAL IGES GEOMETRY TO BE ± 0.15MM UNLESS CRITICAL TOLERANCE INDICATED.
2. ALL GATES AND EJECTION PINS TO BE PLACED ON INTERNAL SURFACES.
3. ALL EXTERNAL SURFACES TO BE FREE OF ALL FOREIGN PARTICLES, FLOW LINES, FLOW LINES, WELD LINES, GATE BLUSH, FLASH, SINK OR ANY OTHER TOOLING/MOLDING DEFECTS.
4. MATERIALS:


FOOT: RUBBER
5. COLOR, FINISH, SEE CMF DOCUMENTS
6. DRAFT ANGLES TO BE 1° FOR UNTEXTURED SURFACES AND 2.5° FOR TEXTURED SURFACES
7. SCULPTED SURFACES REFER TO 3D FILE PROVIDED BY ROKU
8. ONE HALF OF A FEATURE DIMENSIONED ACROSS A CENTER LINE AND/OR A SYMETRICAL CALL-OUT IS EQUAL TO THE DIMENSION SHOWN DIVIDED BY 2 AND ITS TOLERANCE DIVIDED BY 2
9. GATE TRIM TO BE 0.5 MAXIMUM, IF NO FUNCTIONAL IMPACT IN ASSEMBLY
10. NO SINK OR DEPRESSIONS TO BE VISIBLE ON APPEARANCE SURFACES.
11. APPEARANCE SURFACES TO BE FREE OF COSMETIC DEFECTS, INCLUDING, BUT NOT LIMITED TO SPLAY, PARTICLES, BURNED PLASTIC/MARKS, AND SIMILAR IMPERFECTIONS.
12. PART TO BE FREE OF MOLD RELEASE
13. MOLD DESIGN TO MINIMIZE EJECTION MARKS, GATE BLUSH, FLOW LINES AND WELD MARKS. MOLD CONSTRUCTION TO CONFORM TO GOOD MOLDING INDUSTRY STANDARDS PRACTICE AS STATED IN THE CURRENT EDITION OF STANDARDS AND PRACTICES OF PLASTIC CUSTOM MOLDERS BY THE SOCIETY OF THE PLASTICS INDUSTRY, INC.
14. PARTING LINE MISMATCH AND FLASH NOT TO EXCEED 0.15 TOTAL.
15. MOLD TO BE PROPERTY OF ROKU AND SHALL BE PERMANENTLY MARKED WITH "ROKU" AND ITS TOOL #.
16. EJECTOR PIN, PARTING LINE, AND GATE LOCATIONS MUST BE APPROVED BY ROKU DESIGN ENGINEERING PRIOR TO MOLD FABRICATION. EJECTOR PIN MARKS TO BE FLUSH TO 0.1 DEPRESSED, AND 0.10 FLASH IS ALLOWED.
17. BURR AND FLASH: ALL INTERNAL BURRS AND FLUSHES ARE ALLOWED UP TO 0.5MM HIGH MAX. AS LONG AS THE BURRS OR FLASHES DO NOT TOUCH WITH ANY OTHER STEADY OR MOVING COMPONENTS AND CAUSE RELIABILITY OR FUNCTIONAL IMPACT, AND AS LONG AS THEY CANNOT BE SEEN ANYWHERE OUTSIDE OF THE PRODUCT ASSEMBLY.
18. DIMENSIONS MARKED WITH " " ARE FOR INCOMING AND FIRST ARTICLE INSPECTION.

-DIMENSIONS MARKED TO ARE FOR FIRST ARTICLE INSPECTION.

-DIMENSIONS MARKED TO ARE FOR TOOLING MEASUREMENT
19. INSPECTION DIMENSIONS SHOULD BE MEASURED WITH FOLLOWING EQUIPMENT:

---PROJECTOR:

---CALIPER:

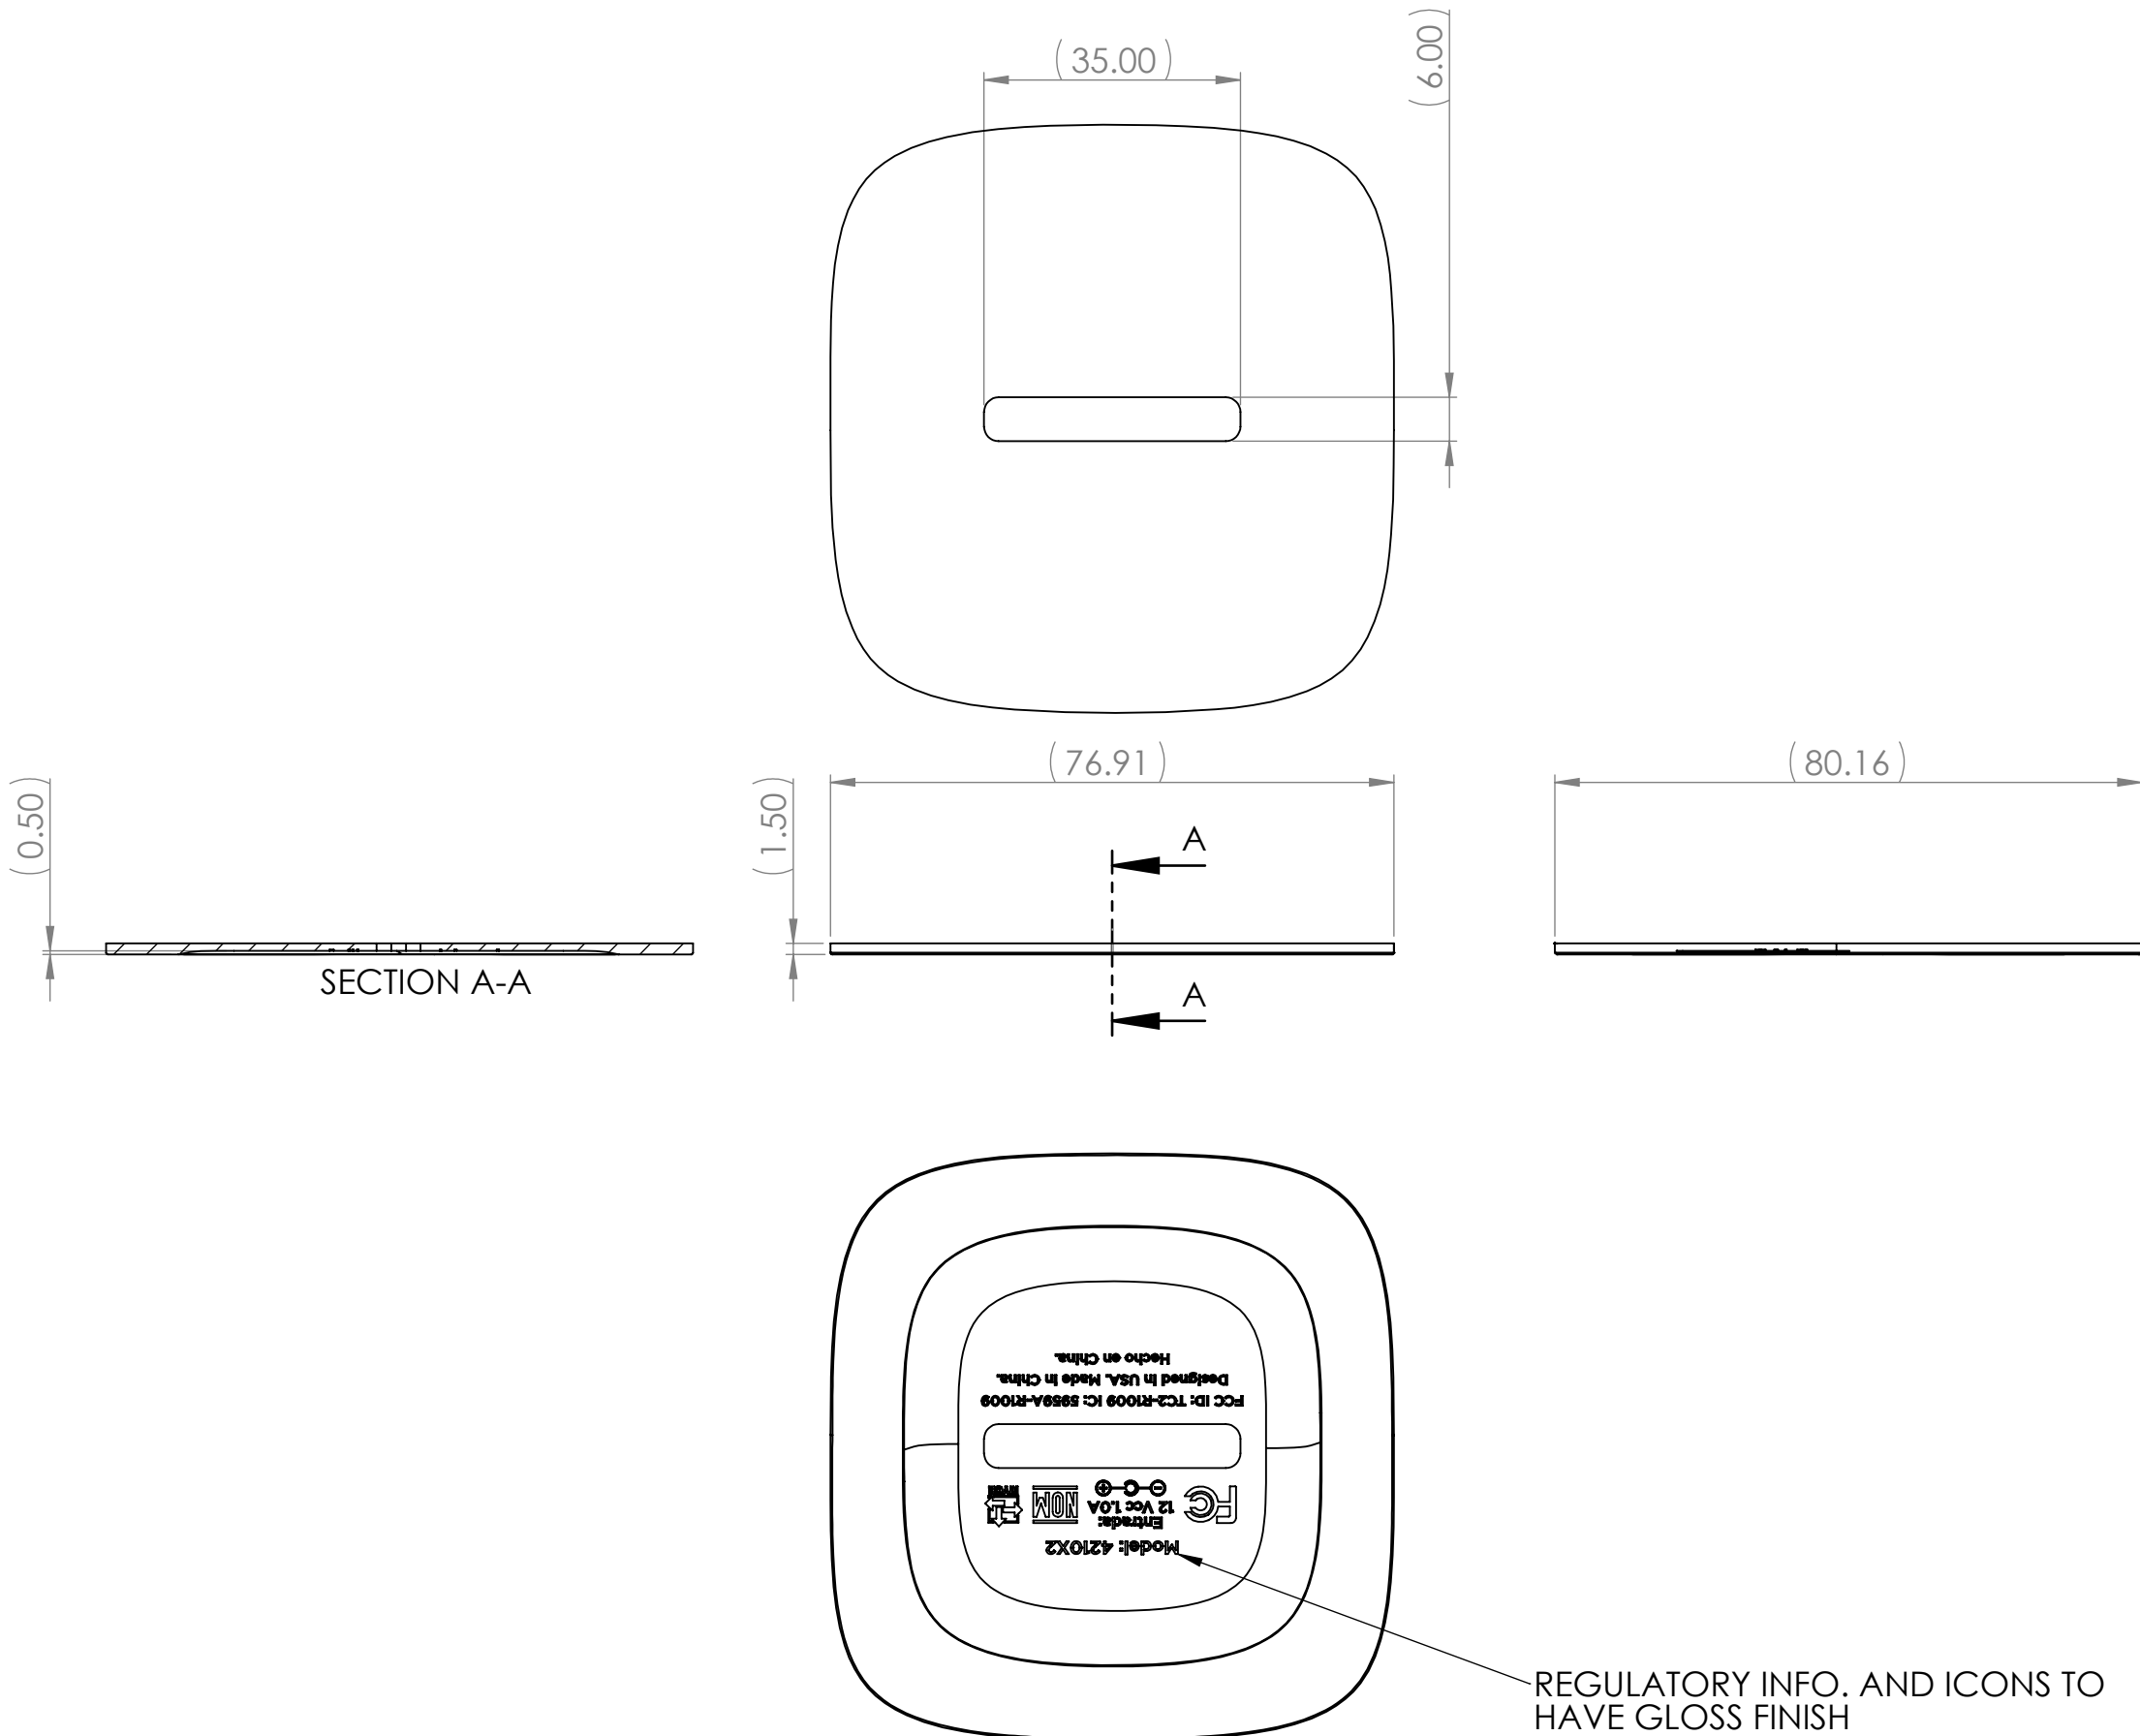


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ANY REPRODUCTION IN
PART OR AS A WHOLEWITHOUT THE WRITTEN
PERMISSION OF: IS PROHIBITED.

DO NOT SCALE	
GENERAL TOLERANCE (UNLESS OTHERWISE SPECIFIED)	
.X	± 0.2mm
DECIMALS: .XX	± 0.1mm
.XXX	± 0.05mm
ANGLES:	± 0.5°
UNITS:	
MATERIAL	
FINISH	
VOLUME	mm^3


	NAME	DATE
DRAWN	TANNER	09/09/15
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

THIRD ANGLE PROJECTION



bould design		
CLIENT:ROKU		
mustang_foot_4210x2_001		
DESCRIPTION MUSTANG FOOT 4210X2 LITEON		
SIZE	PART NO.:	REV
C		001
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

<BOTTOM>

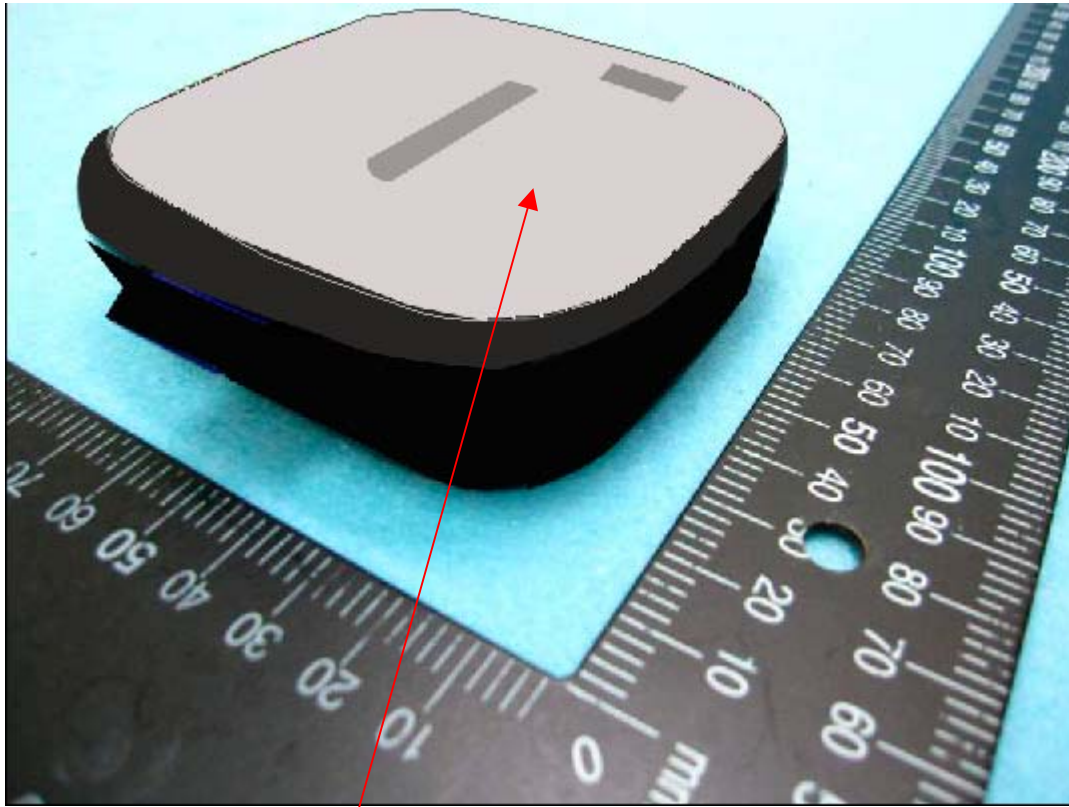

Label Here

Label size = $81.00 \pm 0.20\text{mm}$ x $77.35 \pm 0.30\text{mm}$