



FCC PART 15, SUBPART C
ISED RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Roku, Inc.

150 Winchester Circle,
Los Gatos, CA 95032, USA

FCC ID: TC2-R1016
IC: 5959A-R1016

Report Type: Original Report	Model: 4660X2
Prepared By: Chin Ming Lui Test Engineer	
Report Number: R1706267-247	
Report Date: 2017-08-17	
Reviewed By: Jin Yang RF Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (Rev.0)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Objective.....	5
1.3 Related Submittal(s)/Grant(s)	5
1.4 Test Methodology	5
1.5 Measurement Uncertainty	5
1.6 Test Facility Registrations	6
1.7 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification.....	9
2.2 EUT Exercise Software.....	9
2.3 Duty Cycle Correction Factor	10
2.4 Equipment Modifications.....	13
2.5 Local Support Equipment	13
2.6 Support Equipment	13
2.7 Interface Ports and Cabling.....	13
3 Summary of Test Results	14
4 FCC §15.203 & ISSED RSS-Gen §8.3 - Antenna Requirements	15
4.1 Applicable Standards	15
4.2 Antenna Description	15
5 FCC §2.1091, §15.247(i) & ISSED RSS-102 - RF Exposure	16
5.1 Applicable Standards	16
5.2 MPE Prediction.....	17
5.3 MPE Results	17
5.4 RF exposure evaluation exemption for IC	17
6 FCC §15.207 and ISSED RSS-Gen §8.8 - AC Line Conducted Emissions	18
6.1 Applicable Standards	18
6.2 Test Setup	18
6.3 Test Procedure	18
6.4 Corrected Amplitude and Margin Calculation.....	19
6.5 Test Setup Block Diagram.....	19
6.6 Test Equipment List and Details.....	20
6.7 Test Environmental Conditions	20
6.8 Summary of Test Results	20
6.9 Conducted Emissions Test Plots and Data.....	21
7 FCC §15.209, §15.247(d) & ISSED RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....	23
7.1 Applicable Standards	23
7.2 Test Setup	25
7.3 Test Procedure	25
7.4 Corrected Amplitude and Margin Calculation.....	25
7.5 Test Equipment List and Details.....	26
7.6 Test Environmental Conditions	26
7.7 Summary of Test Results	27
7.8 Radiated Emissions Test Results	28
8 FCC §15.247(a) (2) & ISSED RSS-247 §5.2 - Emission Bandwidth	35
8.1 Applicable Standards	35
8.2 Measurement Procedure.....	35
8.3 Test Equipment List and Details.....	35
8.4 Test Environmental Conditions	35
8.5 Test Results.....	35

9	FCC §15.247(b) (3) & ISED RSS-247 §5.4 (4) - Output Power Measurement	53
9.1	Applicable Standards	53
9.2	Measurement Procedure	53
9.3	Test Equipment List and Details	53
9.4	Test Environmental Conditions	53
9.5	Test Results	54
10	FCC §15.247(d) & ISED RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges	55
10.1	Applicable Standards	55
10.2	Measurement Procedure	55
10.3	Test Equipment List and Details	55
10.4	Test Environmental Conditions	56
10.5	Test Results	56
11	FCC §15.247(e) & ISED RSS-247 §5.2(2) - Power Spectral Density	60
11.1	Applicable Standards	60
11.2	Measurement Procedure	60
11.3	Test Equipment List and Details	60
11.4	Test Environmental Conditions	60
11.5	Test Results	61
12	FCC §15.247(d) & ISED RSS-247 §5.5 and ISED RSS-GEN §8.9 - Spurious Emissions at Antenna Terminals	70
12.1	Applicable Standards	70
12.2	Test Procedure	70
12.3	Test Equipment List and Details	70
12.4	Test Environmental Conditions	71
12.5	Test Results	71
13	Exhibit A (Informative) - A2LA Electrical Testing Certificate	83

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1706267-247	Original Report	2017-08-17

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Roku, Inc.*, and their product model: 4660X2, FCC ID: TC2-R1016, IC: 5959A-R1016 or the “EUT” as referred to in this report.

1.2 Objective

This report is prepared on behalf of *Roku, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISSED RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISSED RSS-247 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, Power Spectral Density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart E, Equipment NII with FCC ID: TC2-R1016, IC: 5959A-R1016 report: R1706267-407
FCC Part 15, Subpart E, Equipment NII with FCC ID: TC2-RCB16, IC: 5959A-RCB16 report: R1706268-407
FCC Part 15, Subpart C, Equipment DTS with FCC ID: TC2-RCB16, IC: 5959A-RCB16 report: R1706268-247

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2

2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes and Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;

- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
 - o Radio and Teleterminal Equipment (RandTTE) Directive 1995/5/EC
US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)
APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test firmware used was Putty provided by *Roku, Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	53
	2417	58
	2422	63
	2437	63
	2452	63
	2457	55
	2462	53
802.11g	2412	49
	2417	53
	2422	58
	2437	63
	2457	55
	2462	49
802.11n20	2412	49
	2417	58
	2437	63
	2452	60
	2457	55
	2462	45

Data Rates Tested:

802.11b mode: 1Mbps

802.11g mode: 6Mbps

802.11n HT20 mode: HTMCS0

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v04 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).

Radio Mode	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11b	100	0
802.11g	100	0
802.11n20	100	0


Duty Cycle = On Time (ms)/ Period (ms)

Duty Cycle Correction Factor (dB) = $10 \cdot \log(1/\text{Duty Cycle})$


Please refer to the following plots.

Antenna Port A


802.11b mode

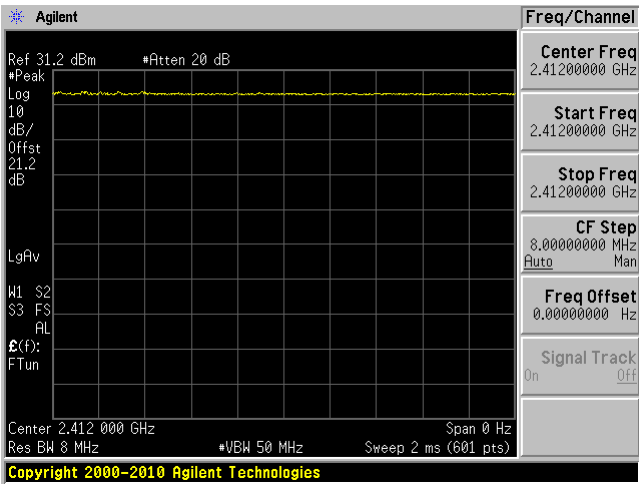


802.11g mode

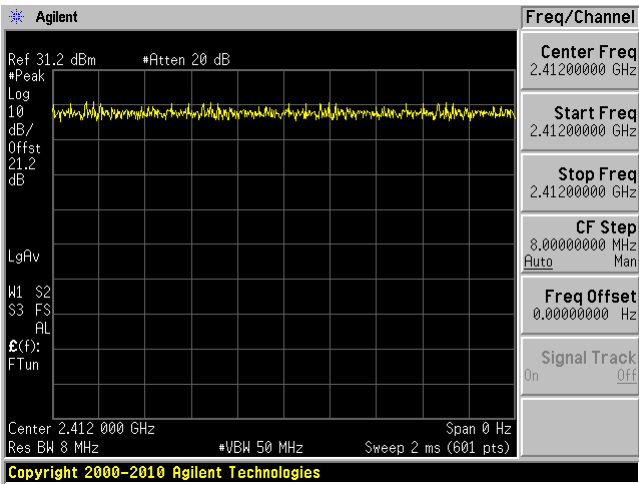

802.11n20 mode

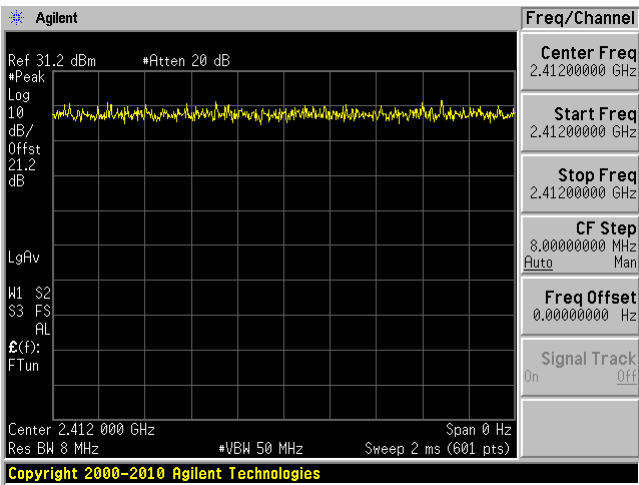


802.11 n20 mode MIMO

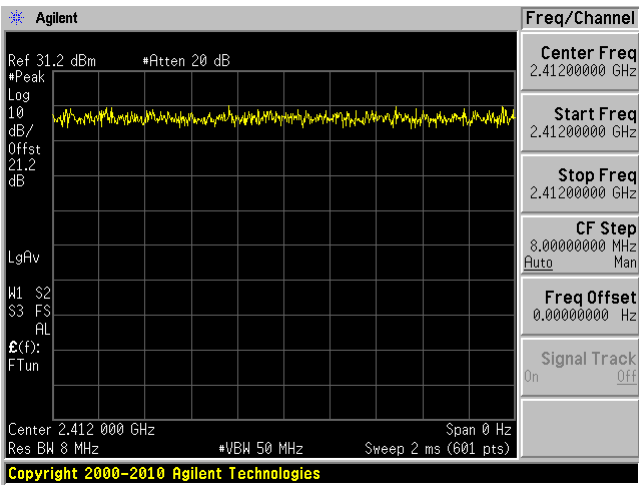


Antenna Port B


802.11b mode

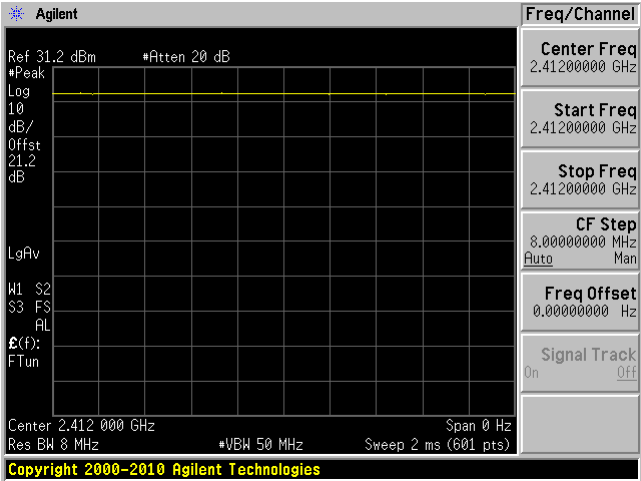


802.11g mode

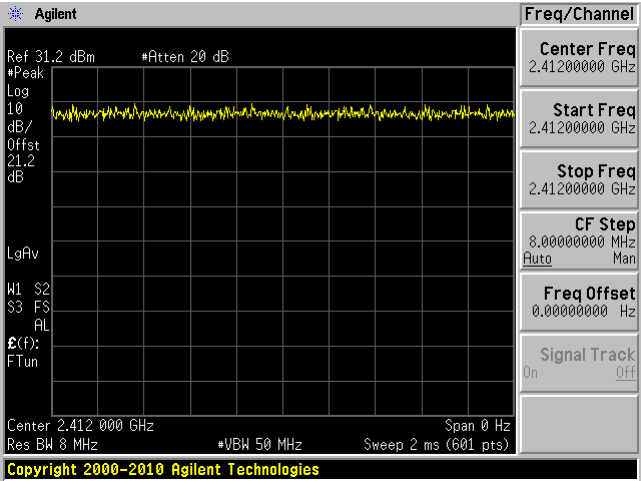

802.11n20 mode

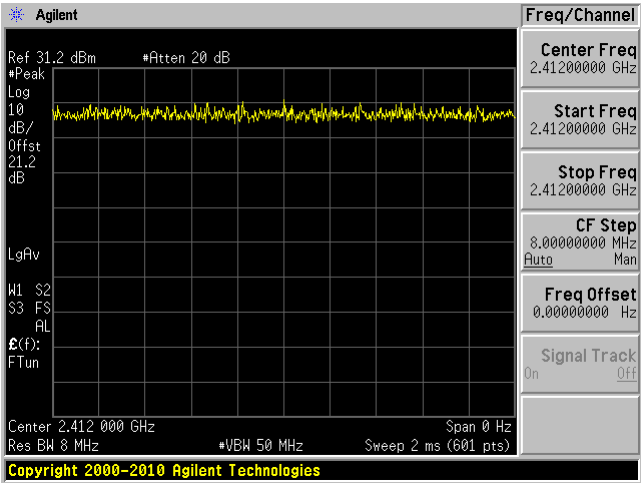

802.11 n20 mode MIMO

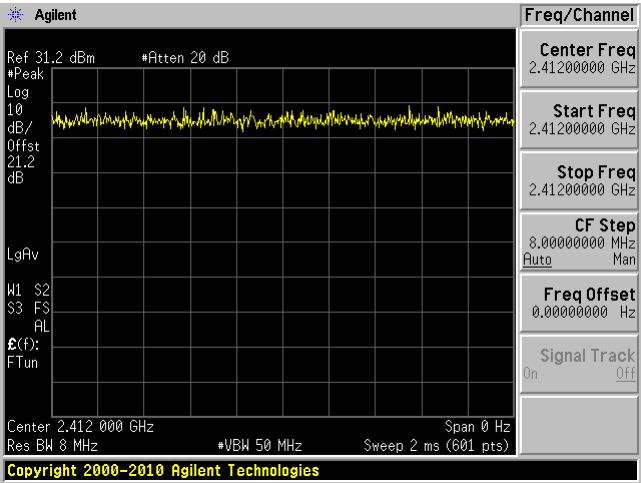

2.4 Equipment Modifications

No equipment modifications are made to the EUT

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E6410

2.6 Support Equipment

Manufacturer	Description	Model
Roku	Debug Board	Unknown

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB 2.0 A-Male to B-Male	2 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISSED Rules	Description of Test	Results
FCC §15.203 ISED RSS-Gen §8.3	Antenna Requirement	Compliant
FCC §15.207 ISED RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1091, §15.247(i) ISED RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247 (d) ISED RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247 (d) ISED RSS-247 §5.5 ISED RSS-Gen §8.9 and §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISED RSS-247 §5.2 (1)	6 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISED RSS-247 §5.4 (4)	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISED RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) ISED RSS-247 §5.2 (2)	Power Spectral Density	Compliant

4 FCC §15.203 & ISED RSS-Gen §8.3 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISED RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. 9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

4.2 Antenna Description

The antennas used by the EUT are permanent attached antennas.

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Wi-Fi	2400-2500	2.6
Wi-Fi	5150-5250	1.1
Wi-Fi	5725-5850	2.4

5 FCC §2.1091, §15.247(i) & ISED RSS-102 - RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field

According to ISED RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>20.63</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>115.611</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.820</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0419</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0419 mW/cm². Limit is 1.0 mW/cm².

5.4 RF exposure evaluation exemption for IC

$$20.63 + 2.6 \text{ dBi} = 23.23 \text{ dBm} < 1.31 \times 10^{-2} f^{0.6834} = 2.7030 \text{ W} = 34.318 \text{ dBm}$$

Therefore the RF exposure is not required.

6 FCC §15.207 and ISSED RSS-Gen §8.8 - AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISSED RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 and ISSED RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

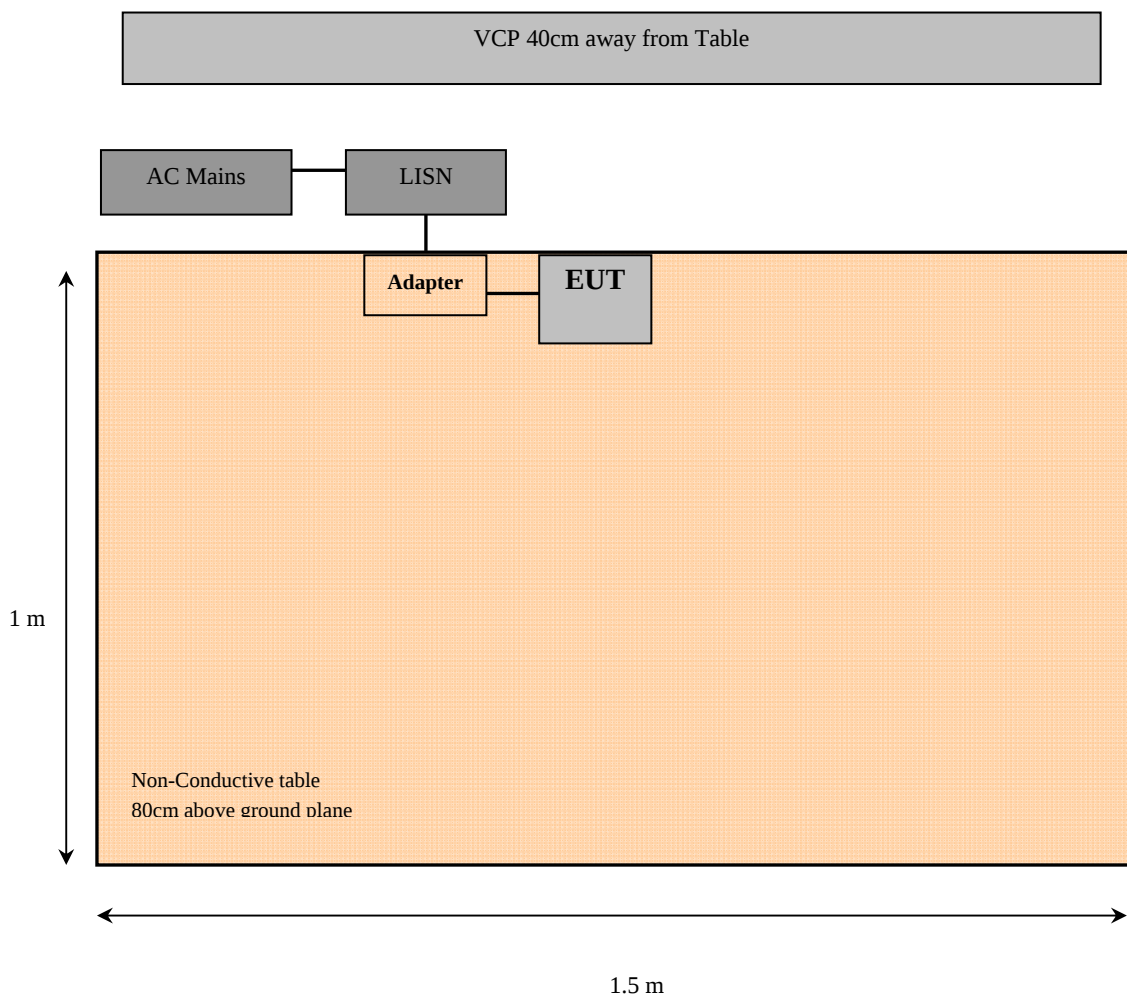

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2017-07-25	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2017-01-12	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.7 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	101.31 kPa

The testing was performed by Chin Ming Lui on 2017-07-26 in 5 chamber 3.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISSED RSS-Gen standard's conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-17.04	0.392416	Line	0.15-30


6.9 Conducted Emissions Test Plots and Data

120 V, 60 Hz – Line

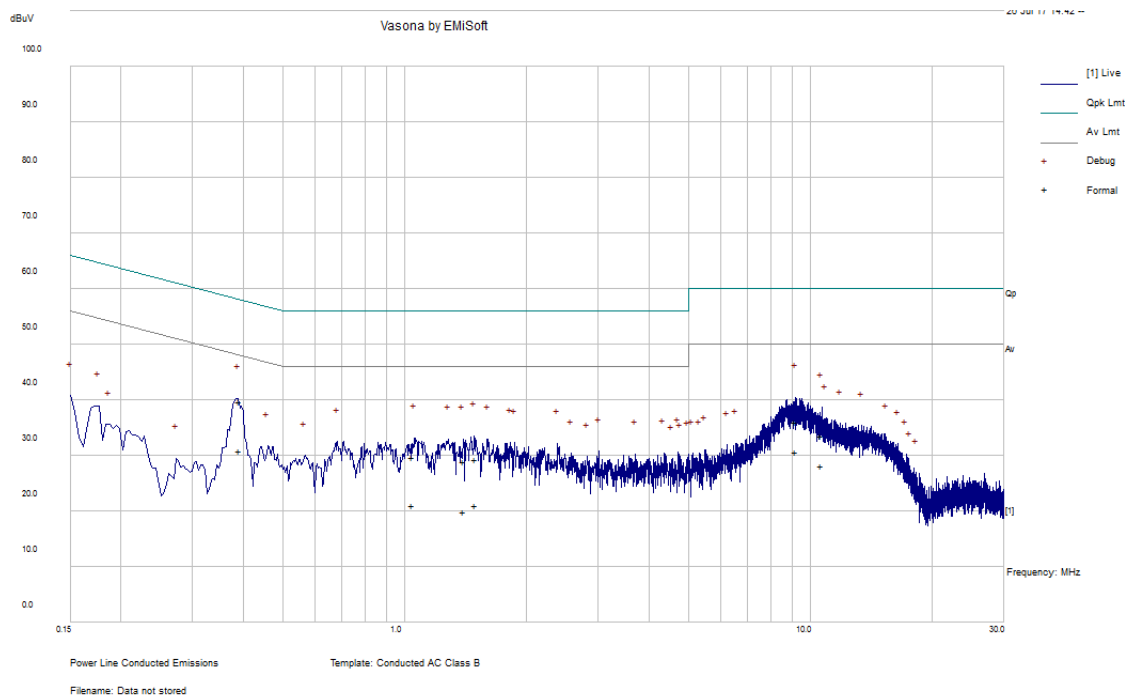

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.392416	39.71	Line	58.01	-18.3	QP
9.182511	36.16	Line	60	-23.84	QP
10.67435	33.55	Line	60	-26.45	QP
1.493905	29.28	Line	56	-26.72	QP
1.043903	29.83	Line	56	-26.17	QP
1.396946	29.01	Line	56	-26.99	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.392416	30.97	Line	48.01	-17.04	Ave.
9.182511	30.63	Line	50	-19.37	Ave.
10.67435	28.16	Line	50	-21.84	Ave.
1.493905	21.04	Line	46	-24.96	Ave.
1.043903	21.01	Line	46	-24.99	Ave.
1.396946	19.91	Line	46	-26.09	Ave.

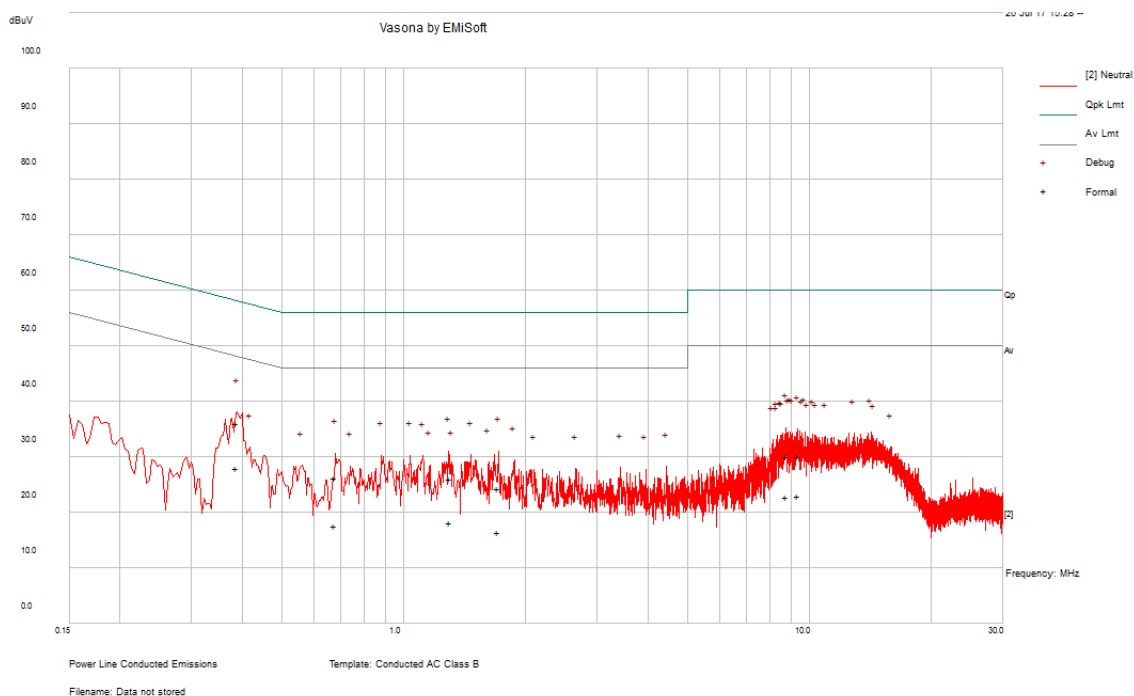120 V, 60 Hz – Neutral

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.387232	36.05	Neutral	58.12	-22.07	QP
8.755709	30.1	Neutral	60	-29.9	QP
1.299826	26.05	Neutral	56	-29.95	QP
1.704697	24.45	Neutral	56	-31.55	QP
9.365614	30.08	Neutral	60	-29.92	QP
0.674887	26.38	Neutral	56	-29.62	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.387232	28.02	Neutral	48.12	-20.11	Ave.
8.755709	22.81	Neutral	50	-27.19	Ave.
1.299826	18.27	Neutral	46	-27.73	Ave.
1.704697	16.46	Neutral	46	-29.54	Ave.
9.365614	22.94	Neutral	50	-27.06	Ave.
0.674887	17.61	Neutral	46	-28.39	Ave.

7 FCC §15.209, §15.247(d) & ISSED RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz.

However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISSED RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for license-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISSED RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISSED RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

(1) Peak: $\text{RBW} = 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto}$

(2) Average: $\text{RBW} = 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto}$

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB1	A013105-3	2015-07-11	25 months
EMCO	Antenna, Horn	3115	9511-4627	2016-01-28	2 years
Agilent	Amplifier, Pre	8447D	2944A06639	2017-06-15	1 year
IW	AOBOR Hi frequency Co AX Cable	DC 1531	KPS- 1501A3960KPS	2016-08-05	1 year
-	SMA cable	-	C0002	Each time ¹	N/A
-	N-Type Cable	-	C00012	Each time ¹	N/A
-	N-Type Cable	-	C00014	Each time ¹	N/A
Agilent	Pre-Amplifier	8449B	3147A00400	2017-06-15	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2015-09-21	2 years
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

7.6 Test Environmental Conditions

Temperature:	20-23 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Vincent Licata 2017-08-01 in 5m chamber 3.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISSED RSS-247 standard's radiated emissions limits, and had the worst margin of:


2.4 GHz Wi-Fi

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, channel
-0.37	2483.5	Vertical	n20, high channel

Please refer to the following table and plots for specific test result details

7.8 Radiated Emissions Test Results

1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

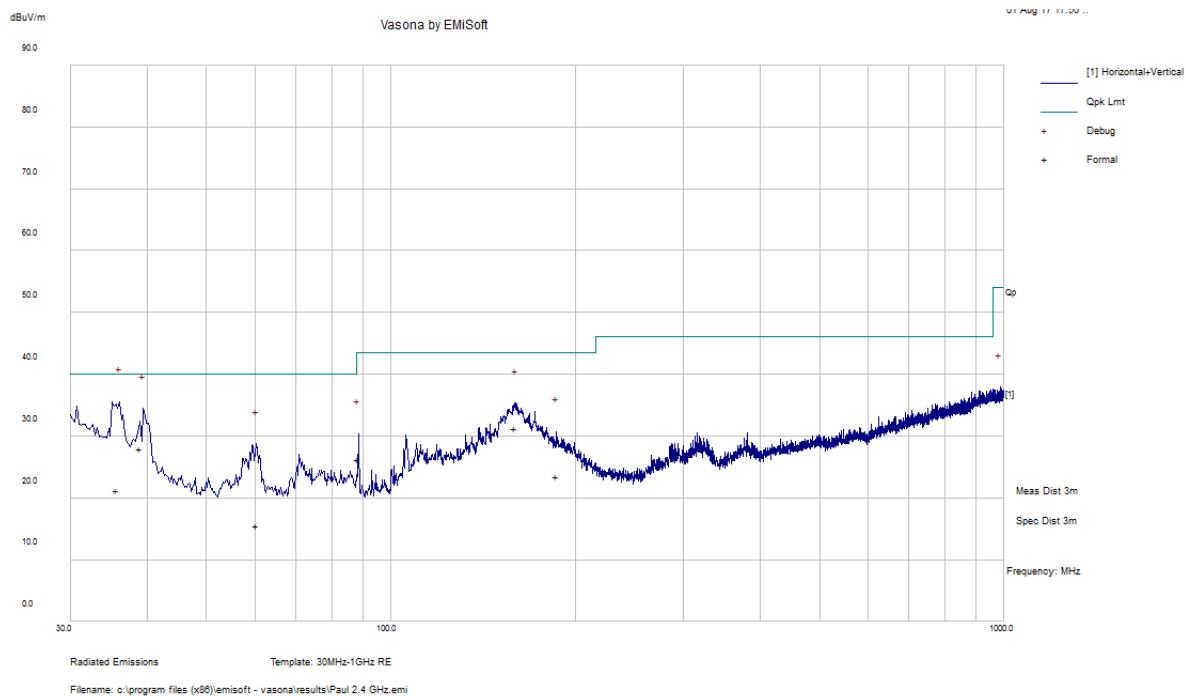

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
35.6955	21.27	105	V	278	40	-18.73	QP
38.9955	28.03	100	V	314	40	-11.97	QP
159.6053	31.28	99	V	45	43.5	-12.22	QP
60.3185	15.56	263	V	168	40	-24.44	QP
185.931	23.57	253	H	316	43.5	-19.93	QP
88.493	26.28	211	H	24	43.5	-17.22	QP

Note: Only 6 emissions were present because the other emissions were 20 dB below the limit.

2) 1–25 GHz Measured at 3 meters

Note: After the pre-scan, the worst case for each mode has been selected for the formal tested as below,

802.11b mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	72.65	325	225	H	28.94	6.29	0	107.88	-	-	PK
2412	69.06	325	225	H	28.94	6.29	0	104.29	-	-	AV
2412	71.47	293	300	V	28.93	6.29	0	106.69	-	-	PK
2412	68.04	293	300	V	28.93	6.29	0	103.26	-	-	AV
2390	28.21	55	158	H	28.94	6.24	0	63.39	74.00	-10.61	PK
2390	18.00	55	158	H	28.94	6.24	0	53.18	54.00	-0.82	AV
2390	28.03	308	168	V	28.93	6.24	0	63.20	74.00	-10.80	PK
2390	16.92	308	168	V	28.93	6.24	0	52.09	54.00	-1.91	AV
4824	50.26	61	100	V	32.53	9.62	36.36	56.05	74.00	-17.95	PK
4824	44.93	61	100	V	32.53	9.62	36.36	50.72	54.00	-3.28	AV
7236	47.32	239	100	V	36.88	12.21	36.38	60.03	74.00	-13.97	PK
7236	38.45	239	100	V	36.88	12.21	36.38	51.16	54.00	-2.84	AV
9648	46.18	233	100	V	37.81	13.82	36.43	61.38	74.00	-12.62	PK
9648	35.79	233	100	V	37.81	13.82	36.43	50.99	54.00	-3.01	AV
Middle Channel 2437 MHz											
2437	73.70	323	280	H	29.19	6.29	0.00	109.18	-	-	PK
2437	70.31	323	280	H	29.19	6.29	0.00	105.79	-	-	AV
2437	72.81	292	300	V	29.19	6.29	0.00	108.29	-	-	PK
2437	69.46	292	300	V	29.19	6.29	0.00	104.94	-	-	AV
4874	49.57	58	100	V	32.70	9.42	36.327	55.35	74.00	-18.65	PK
4874	43.48	58	100	V	32.70	9.42	36.327	49.26	54.00	-4.74	AV
7311	49.70	288	100	V	36.99	11.68	36.40	61.97	74.00	-12.03	PK
7311	40.22	288	100	V	36.99	11.68	36.40	52.49	54.00	-1.51	AV
9748	44.68	0	100	V	37.82	13.21	36.45	59.25	74.00	-14.75	PK
9748	33.29	0	100	V	37.82	13.21	36.45	47.86	54.00	-6.14	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2462 MHz											
2462	72.01	320	100	H	29.15	6.35	0.00	107.51	-	-	PK
2462	68.50	320	100	H	29.15	6.35	0.00	104.00	-	-	AV
2462	68.57	357	100	V	29.19	6.35	0.00	104.10	-	-	PK
2462	63.98	357	100	V	29.19	6.35	0.00	99.51	-	-	AV
2483.5	27.76	57	272	H	29.25	6.22	0.00	63.23	74.00	-10.77	PK
2483.5	17.56	57	272	H	29.25	6.22	0.00	53.03	54.00	-0.97	AV
2483.5	28.17	244	263	V	29.18	6.22	0.00	63.57	74.00	-10.43	PK
2483.5	17.68	244	263	V	29.18	6.22	0.00	53.08	54.00	-0.92	AV
4924	50.08	58	112	V	32.70	8.58	36.33	55.03	74.00	-18.97	PK
4924	43.87	58	112	V	32.70	8.58	36.33	48.82	54.00	-5.18	AV
7386	47.06	276	100	V	37.10	12.30	36.41	60.05	74.00	-13.95	PK
7386	37.77	276	100	V	37.10	12.30	36.41	50.76	54.00	-3.24	AV
9848	44.43	0	100	V	37.98	13.76	36.45	59.72	74.00	-14.28	PK
9848	33.97	0	100	V	37.98	13.76	36.45	49.26	54.00	-4.74	AV

802.11g mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	73.57	325	280	H	28.94	6.29	0	108.80	-	-	PK
2412	66.52	325	280	H	28.94	6.29	0	101.75	-	-	AV
2412	70.26	293	300	V	28.93	6.29	0	105.48	-	-	PK
2412	62.40	293	300	V	28.93	6.29	0	97.62	-	-	AV
2390	33.57	325	278	H	28.94	6.24	0	68.75	74.00	-5.25	PK
2390	18.11	325	278	H	28.94	6.24	0	53.29	54.00	-0.71	AV
2390	33.96	294	300	V	28.93	6.24	0	69.13	74.00	-4.87	PK
2390	18.33	294	300	V	28.93	6.24	0	53.50	54.00	-0.50	AV
4824	47.82	0	100	V	32.53	9.62	36.36	53.61	74.00	-20.39	PK
4824	34.10	0	100	V	32.53	9.62	36.36	39.89	54.00	-14.11	AV
7236	47.06	0	100	V	36.88	12.21	36.38	59.77	74.00	-14.23	PK
7236	33.79	0	100	V	36.88	12.21	36.38	46.50	54.00	-7.50	AV
9648	46.87	0	100	V	37.81	13.82	36.43	62.07	74.00	-11.93	PK
9648	33.36	0	100	V	37.81	13.82	36.43	48.56	54.00	-5.44	AV
Low Channel 2412 MHz											
2412	70.32	228	120	H	28.94	6.29	0	105.55	-	-	PK
2412	62.79	228	120	H	28.94	6.29	0	98.02	-	-	AV
2412	69.79	306	100	V	28.93	6.29	0	105.01	-	-	PK
2412	62.24	306	100	V	28.93	6.29	0	97.46	-	-	AV
2390	32.67	229	100	H	28.94	6.24	0	67.85	74.00	-6.15	PK
2390	17.09	229	100	H	28.94	6.24	0	52.27	54.00	-1.73	AV
2390	32.84	306	280	V	28.93	6.24	0	68.01	74.00	-5.99	PK
2390	17.36	306	280	V	28.93	6.24	0	52.53	54.00	-1.47	AV
4824	47.26	0	100	V	32.53	9.62	36.36	53.05	74.00	-20.95	PK
4824	33.92	0	100	V	32.53	9.62	36.36	39.71	54.00	-14.29	AV
7236	46.77	0	100	V	36.88	12.21	36.38	59.48	74.00	-14.52	PK
7236	33.12	0	100	V	36.88	12.21	36.38	45.83	54.00	-8.17	AV
9648	46.64	0	100	V	37.81	13.82	36.43	61.84	74.00	-12.16	PK
9648	33.07	0	100	V	37.81	13.82	36.43	48.27	54.00	-5.73	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/ m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Middle Channel 2437 MHz											
2437	73.90	57	280	H	29.19	6.29	0.00	109.38	-	-	PK
2437	66.72	57	280	H	29.19	6.29	0.00	102.20	-	-	AV
2437	69.37	356	110	V	29.19	6.29	0.00	104.85	-	-	PK
2437	62.19	356	110	V	29.19	6.29	0.00	97.67	-	-	AV
4874	47.25	0	100	V	32.70	9.42	36.327	53.03	74.00	-20.97	PK
4874	34.32	0	100	V	32.70	9.42	36.327	40.10	54.00	-13.90	AV
7311	47.37	286	100	V	36.99	11.68	36.40	59.64	74.00	-14.36	PK
7311	35.52	286	100	V	36.99	11.68	36.40	47.79	54.00	-6.21	AV
9748	45.19	0	100	V	37.82	13.21	36.45	59.76	74.00	-14.24	PK
9748	32.61	0	100	V	37.82	13.21	36.45	47.18	54.00	-6.82	AV
High Channel 2462 MHz											
2462	69.26	320	270	H	29.15	6.35	0.00	104.76	-	-	PK
2462	61.43	320	270	H	29.15	6.35	0.00	96.93	-	-	AV
2462	65.95	357	150	V	29.19	6.35	0.00	101.48	-	-	PK
2462	58.27	357	150	V	29.19	6.35	0.00	93.80	-	-	AV
2483.5	30.34	320	300	H	29.25	6.22	0.00	65.81	74.00	-8.19	PK
2483.5	17.46	320	300	H	29.25	6.22	0.00	52.93	54.00	-1.07	AV
2483.5	30.80	253	266	V	29.18	6.22	0.00	66.20	74.00	-7.80	PK
2483.5	17.92	253	266	V	29.18	6.22	0.00	53.32	54.00	-0.68	AV
4924	46.26	72	100	V	32.70	8.58	36.33	51.21	74.00	-22.79	PK
4924	34.17	72	100	V	32.70	8.58	36.33	39.12	54.00	-14.88	AV
7386	45.66	0	100	V	37.10	12.30	36.41	58.65	74.00	-15.35	PK
7386	33.58	0	100	V	37.10	12.30	36.41	46.57	54.00	-7.43	AV
9848	44.87	0	100	V	37.98	13.76	36.45	60.16	74.00	-13.84	PK
9848	32.38	0	100	V	37.98	13.76	36.45	47.67	54.00	-6.33	AV

802.11n20 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2412 MHz											
2412	71.89	44	280	H	28.94	6.29	0	107.12	-	-	PK
2412	63.97	44	280	H	28.94	6.29	0	99.20	-	-	AV
2412	69.39	355	120	V	28.93	6.29	0	104.61	-	-	PK
2412	61.52	355	120	V	28.93	6.29	0	96.74	-	-	AV
2390	35.97	43	280	H	28.94	6.24	0	71.15	74.00	-2.85	PK
2390	16.96	43	280	H	28.94	6.24	0	52.14	54.00	-1.86	AV
2390	36.44	296	268	V	28.93	6.24	0	71.61	74.00	-2.39	PK
2390	18.44	296	268	V	28.93	6.24	0	53.61	54.00	-0.39	AV
4824	57.78	227	288	V	32.53	9.62	36.36	63.57	74.00	-10.43	PK
4824	46.90	227	288	V	32.53	9.62	36.36	52.69	54.00	-1.31	AV
7236	45.77	0	100	V	36.88	12.21	36.38	58.48	74.00	-15.52	PK
7236	33.38	0	100	V	36.88	12.21	36.38	46.09	54.00	-7.91	AV
9648	45.98	0	100	V	37.81	13.82	36.43	61.18	74.00	-12.82	PK
9648	33.20	0	100	V	37.81	13.82	36.43	48.40	54.00	-5.60	AV
Middle Channel 2437 MHz											
2437	79.07	229	120	H	29.19	6.29	0.00	114.55	-	-	PK
2437	70.72	229	120	H	29.19	6.29	0.00	106.20	-	-	AV
2437	77.36	295	100	V	29.19	6.29	0.00	112.84	-	-	PK
2437	68.43	295	100	V	29.19	6.29	0.00	103.91	-	-	AV
4874	60.42	262	100	V	32.70	9.42	36.327	66.20	74.00	-7.80	PK
4874	47.52	262	100	V	32.70	9.42	36.327	53.30	54.00	-0.70	AV
7311	47.26	0	100	V	36.99	11.68	36.40	59.53	74.00	-14.47	PK
7311	33.61	0	100	V	36.99	11.68	36.40	45.88	54.00	-8.12	AV
9748	45.82	0	100	V	37.82	13.21	36.45	60.39	74.00	-13.61	PK
9748	33.14	0	100	V	37.82	13.21	36.45	47.71	54.00	-6.29	AV

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2462 MHz											
2462	70.31	225	100	H	29.15	6.35	0.00	105.81	-	-	PK
2462	62.05	225	100	H	29.15	6.35	0.00	97.55	-	-	AV
2462	69.02	0	150	V	29.19	6.35	0.00	104.55	-	-	PK
2462	60.99	0	150	V	29.19	6.35	0.00	96.52	-	-	AV
2483.5	34.06	242	290	H	29.25	6.22	0.00	69.53	74.00	-4.47	PK
2483.5	18.03	242	290	H	29.25	6.22	0.00	53.50	54.00	-0.50	AV
2483.5	34.32	322	116	V	29.18	6.22	0.00	69.72	74.00	-4.28	PK
2483.5	18.23	322	116	V	29.18	6.22	0.00	53.63	54.00	-0.37	AV
4924	49.02	255	230	V	32.70	8.58	36.33	53.97	74.00	-20.03	PK
4924	38.68	255	230	V	32.70	8.58	36.33	43.63	54.00	-10.37	AV
7386	45.91	0	100	V	37.10	12.30	36.41	58.90	74.00	-15.10	PK
7386	33.47	0	100	V	37.10	12.30	36.41	46.46	54.00	-7.54	AV
9848	45.63	0	100	V	37.98	13.76	36.45	60.92	74.00	-13.08	PK
9848	33.08	0	100	V	37.98	13.76	36.45	48.37	54.00	-5.63	AV

8 FCC §15.247(a) (2) & ISSED RSS-247 §5.2 - Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.247(a) (2) and ISSED RSS-247 §5.2, systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4446A	MY48250238	2017-02-24	1 year
-	RF cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2017-07-14 in RF site.

8.5 Test Results

Please refer to the following tables and plots.

Note: Per client's requirement, both SISO and MIMO mode for 802.11n were tested.


6 dB& 99% Emission Bandwidth

Antenna Port	Channel	Frequency (MHz)	99% OBW (kHz)	6 dB OBW (kHz)	6 dB OBW Limit (kHz)
A	802.11b mode				
	Low	2412	13656.9	9088	500
	Middle	2437	14435.6	9593	500
	High	2462	13609.9	9557	500
	802.11g mode				
	Low	2412	16505.6	16531	500
	Middle	2437	16856.0	16554	500
	High	2462	16530.0	16555	500
	802.11n-20 mode				
	Low	2412	17636.3	17690	500
	Middle	2437	17940.7	17761	500
	High	2462	17636.4	17686	500
	802.11n-20 mode MIMO				
	Low	2412	17619.6	17692	500
	Middle	2437	17784.4	17711	500
	High	2462	17621.2	17677	500
B	802.11b mode				
	Low	2412	13623.8	9104	500
	Middle	2437	14271.0	9570	500
	High	2462	13656.4	8994	500
	802.11g mode				
	Low	2412	16484.7	16499	500
	Middle	2437	16746.8	16500	500
	High	2462	16436.4	16521	500
	802.11n-20 mode				
	Low	2412	17588.8	17668	500
	Middle	2437	17771.4	17682	500
	High	2462	17607.8	17635	500
	802.11n-20 mode MIMO				
	Low	2412	17600.8	17704	500
	Middle	2437	17749.9	17672	500
	High	2462	17598.8	17577	500


6 dB Emission Bandwidth

802.11b mode (Port A)


Low Channel 2412 MHz

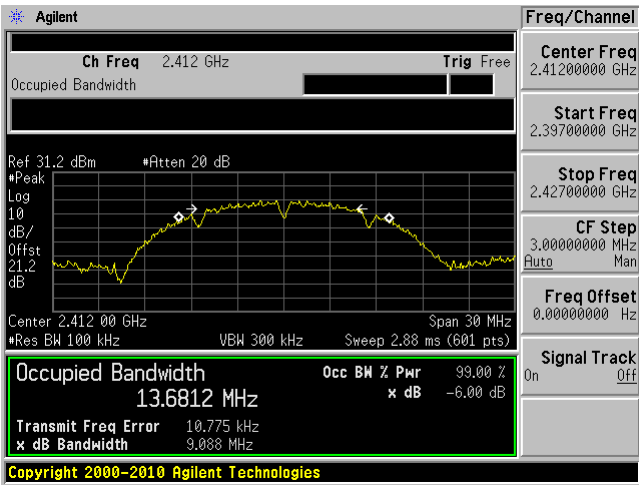

Middle Channel 2437 MHz

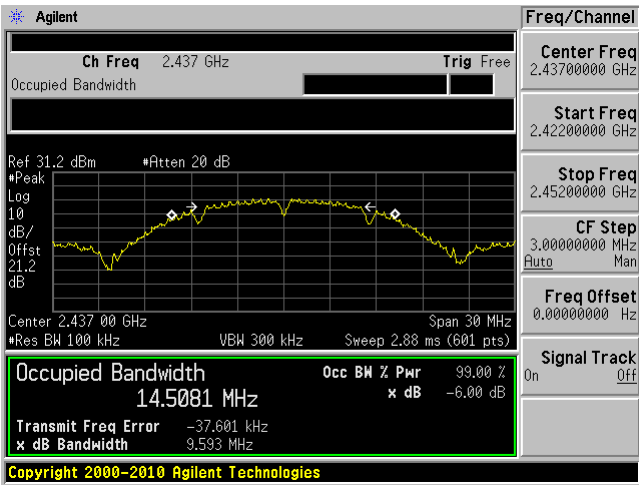


High Channel 2462 MHz

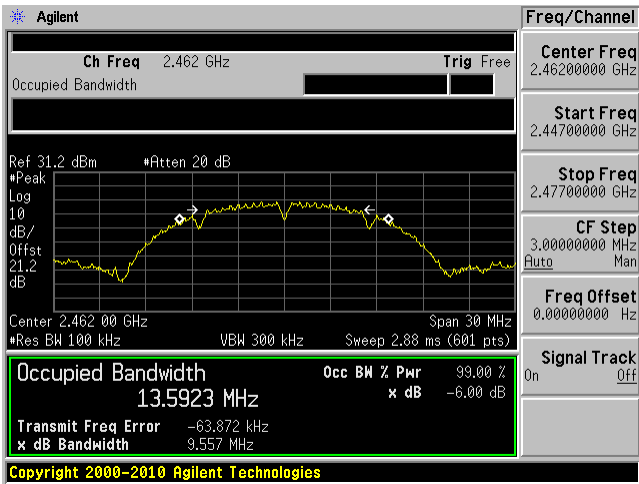


802.11b mode (Port B)


Low Channel 2412 MHz

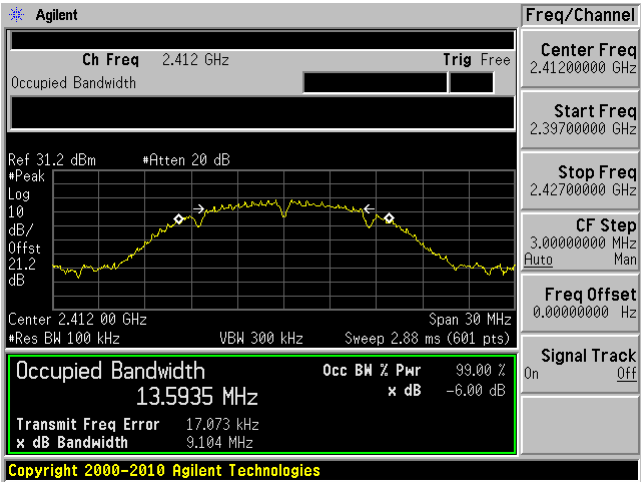

Middle Channel 2437 MHz

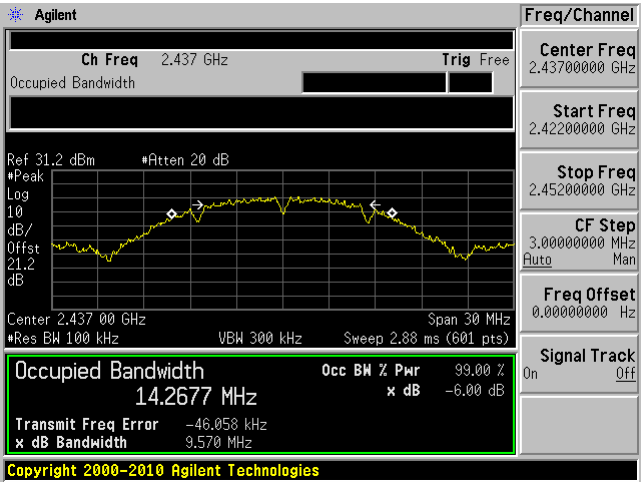


High Channel 2462 MHz

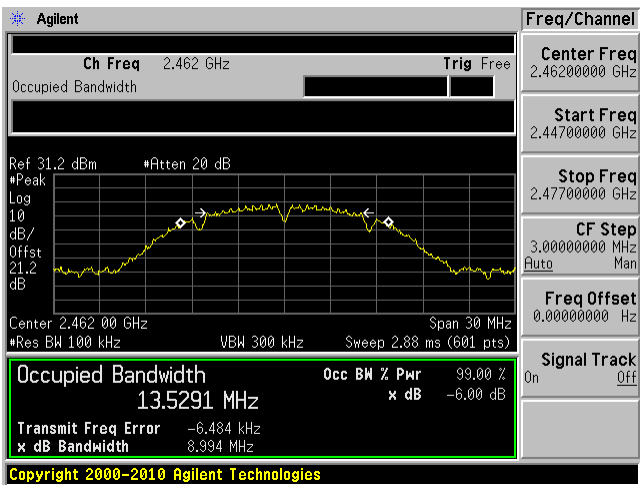


802.11g mode (Port A)


Low Channel 2412 MHz

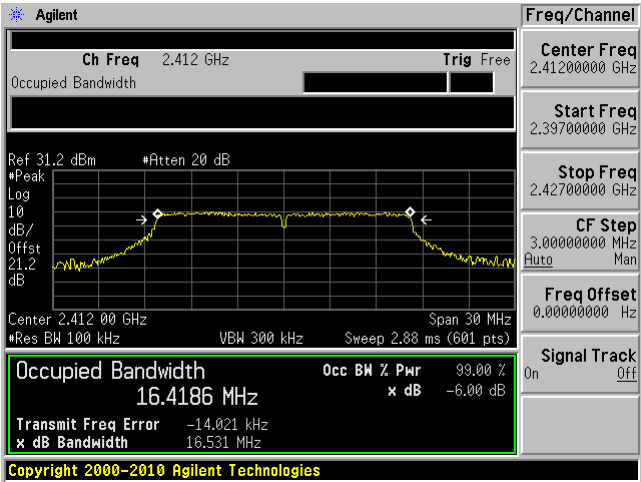

Middle Channel 2437 MHz

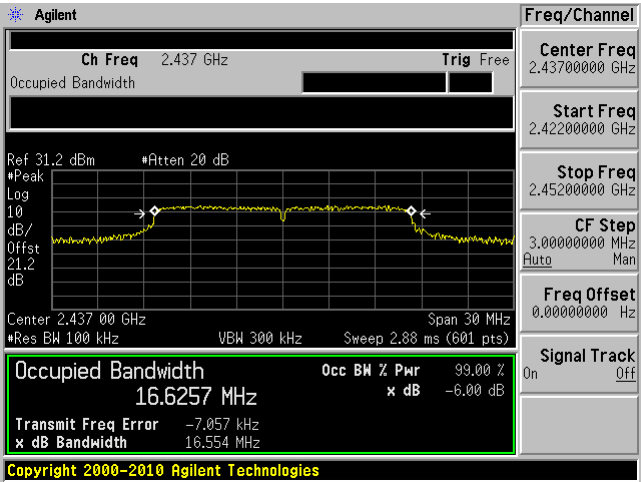


High Channel 2462 MHz

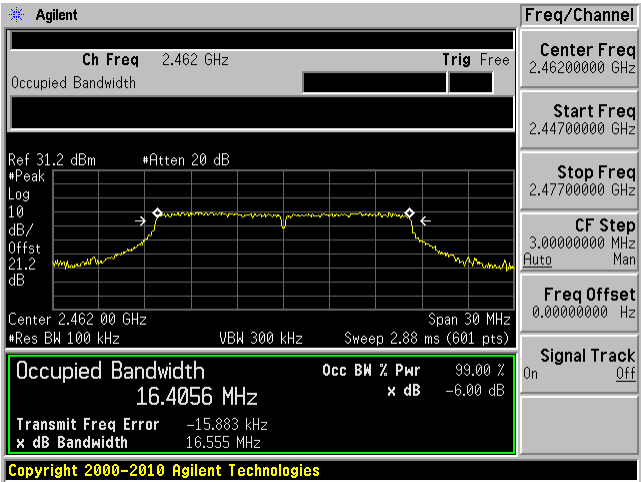


802.11g mode (Port B)


Low Channel 2412 MHz

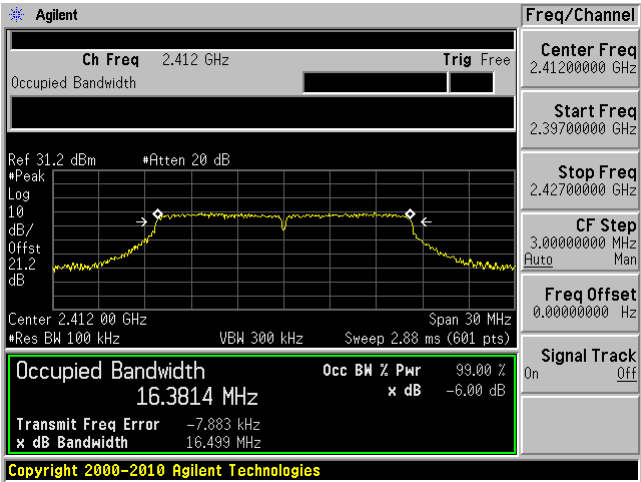

Middle Channel 2437 MHz

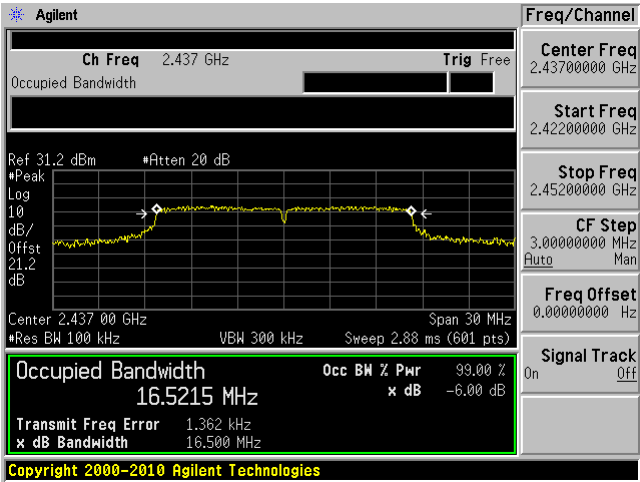


High Channel 2462 MHz

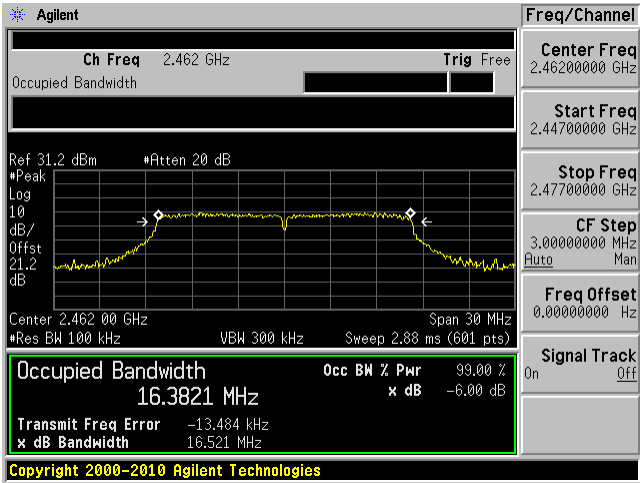


802.11n20 mode (Port A)


Low Channel 2412 MHz

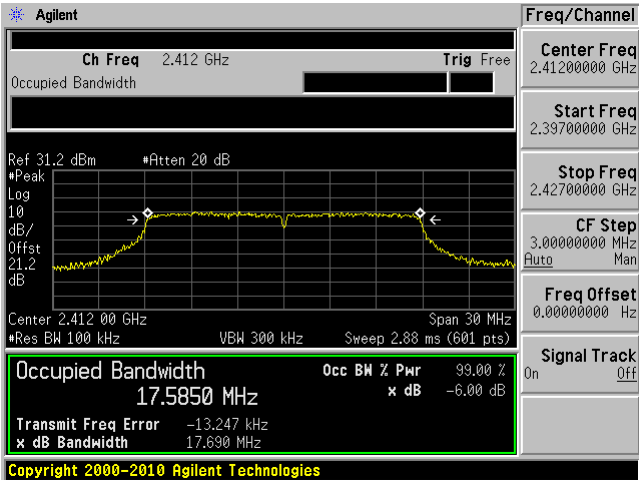

Middle Channel 2437 MHz

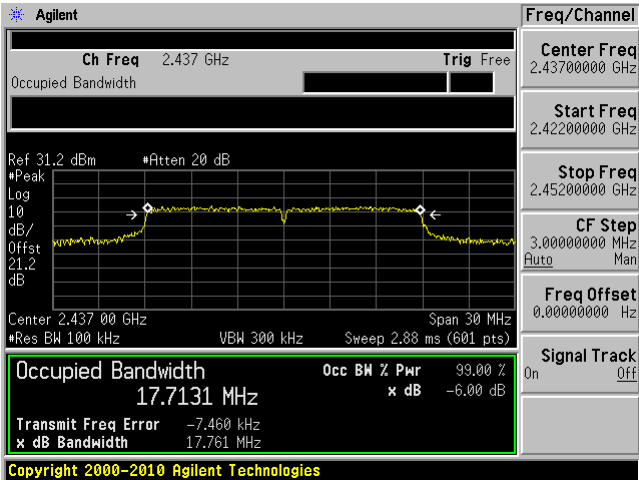


High Channel 2462 MHz

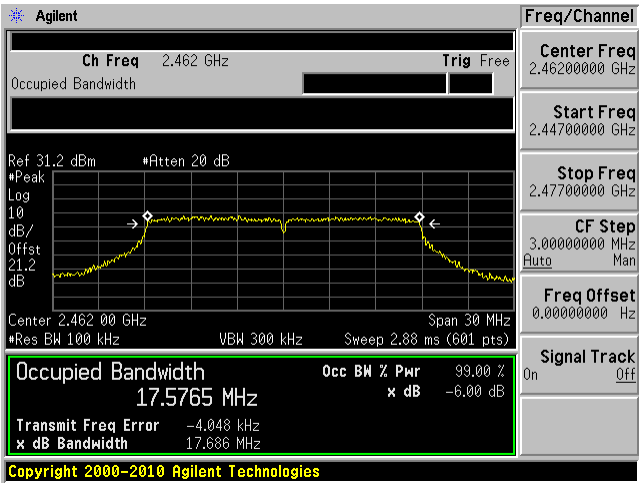


802.11n20 mode (Port A MIMO)


Low Channel 2412 MHz

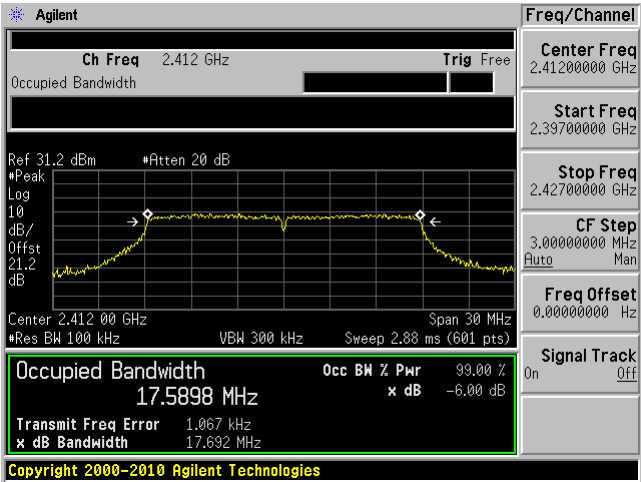

Middle Channel 2437 MHz

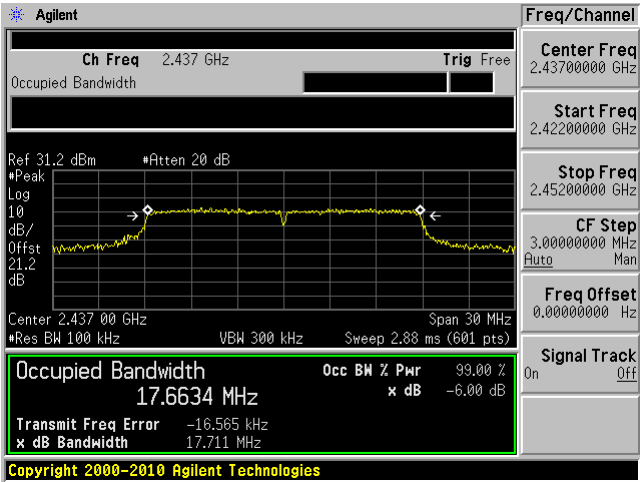


High Channel 2462 MHz

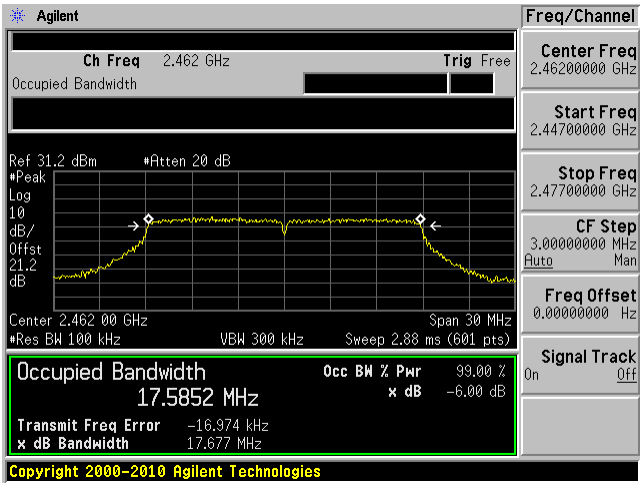


802.11n20 mode (Port B)


Low Channel 2412 MHz

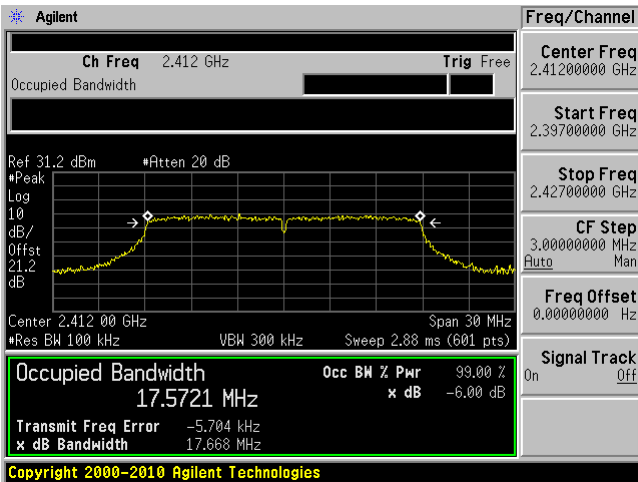

Middle Channel 2437 MHz

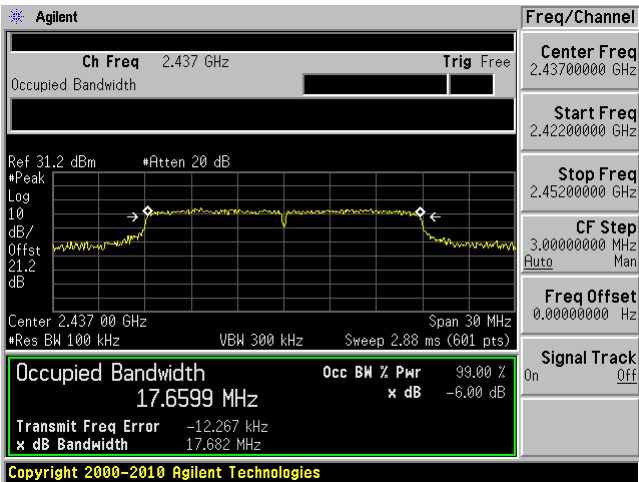


High Channel 2462 MHz

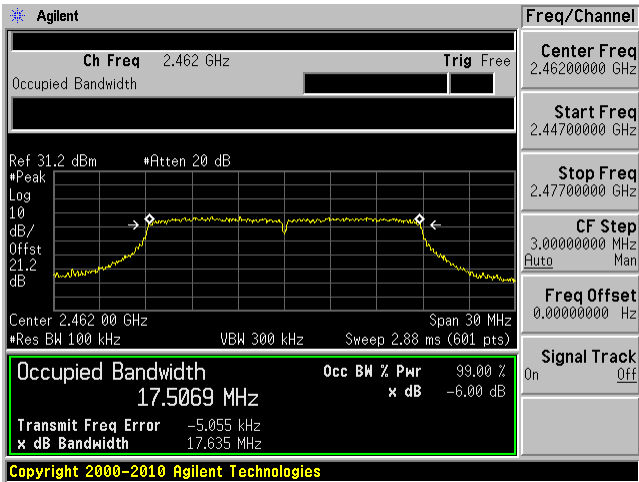


802.11n20 mode (Port B MIMO)


Low Channel 2412 MHz

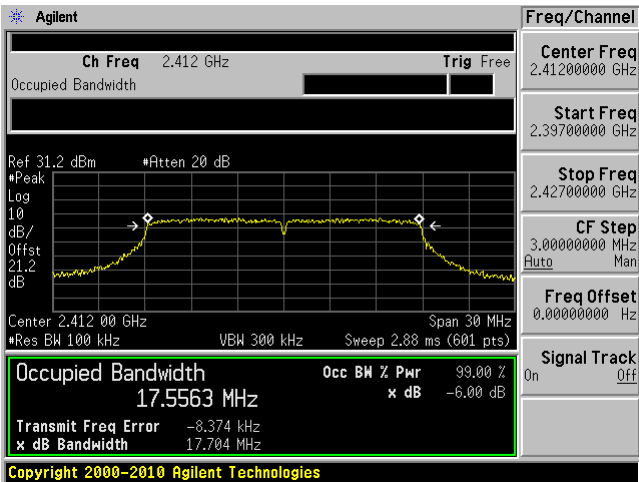

Middle Channel 2437 MHz

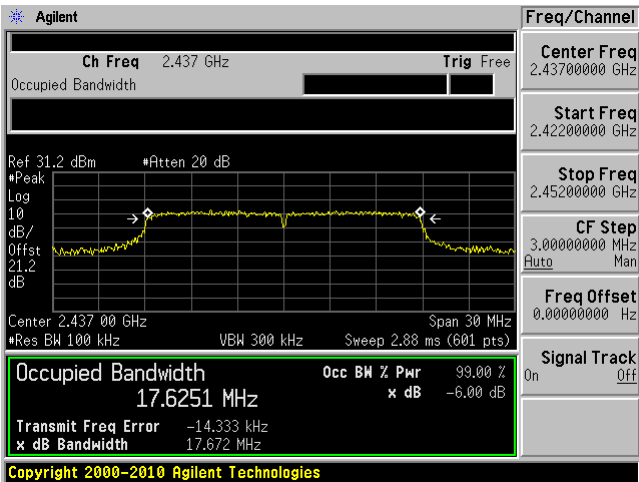


High Channel 2462 MHz

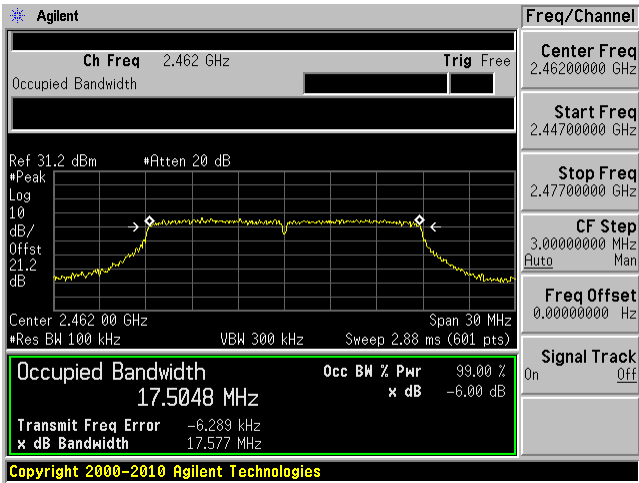


99% Emission Bandwidth

802.11b mode (Port A)


Low Channel 2412 MHz

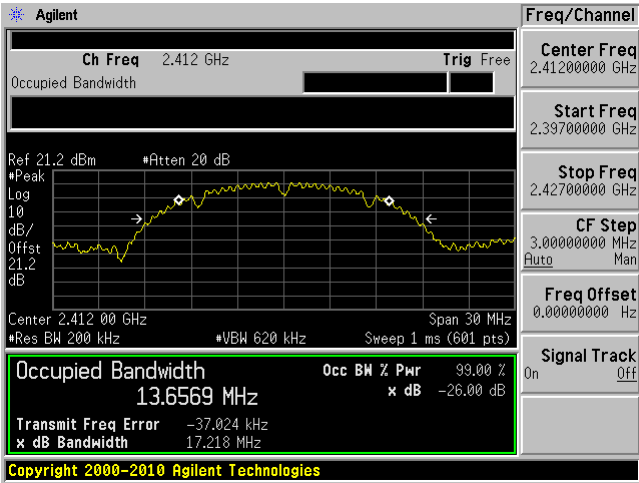

Middle Channel 2437 MHz

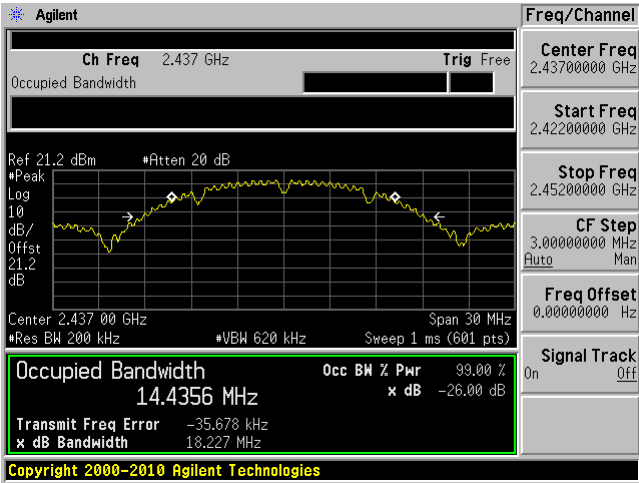


High Channel 2462 MHz

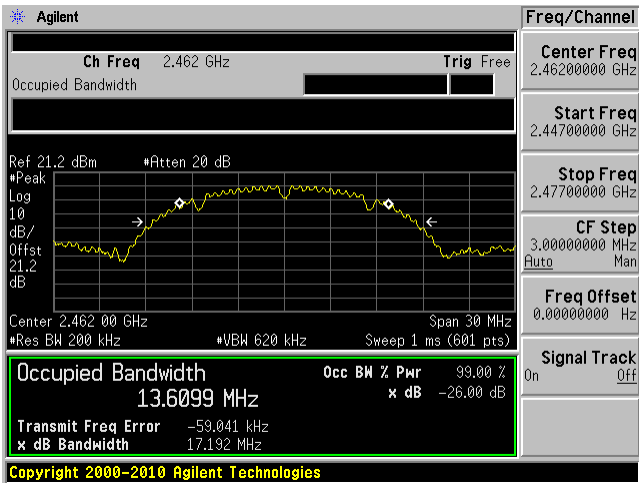


802.11b mode (Port B)


Low Channel 2412 MHz

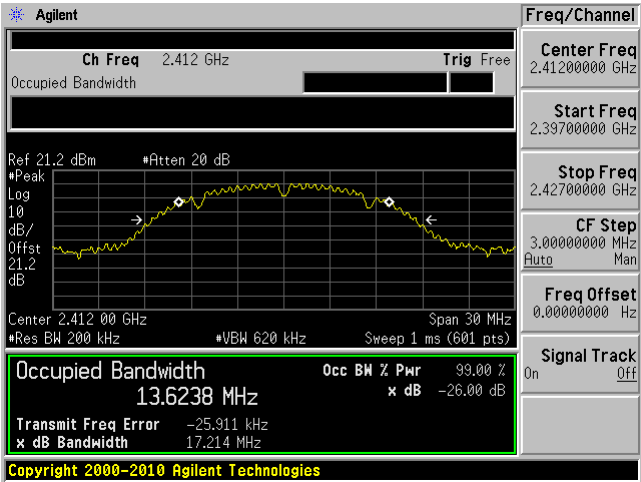

Middle Channel 2437 MHz

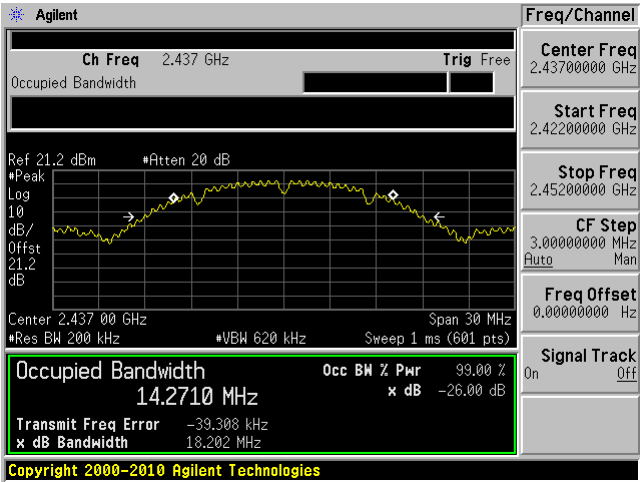


High Channel 2462 MHz

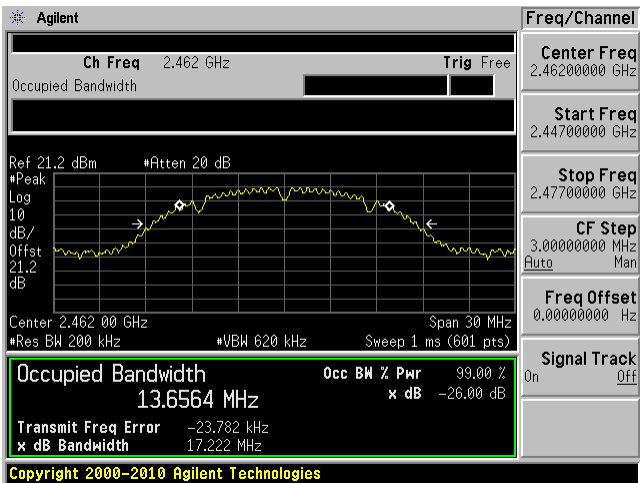


802.11g mode (Port A)


Low Channel 2412 MHz

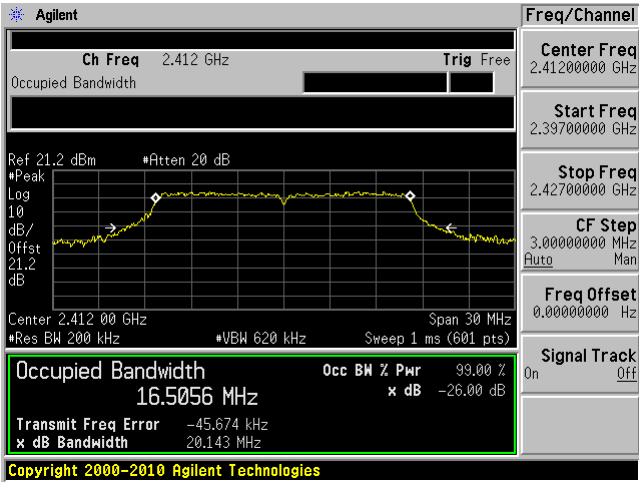

Middle Channel 2437 MHz

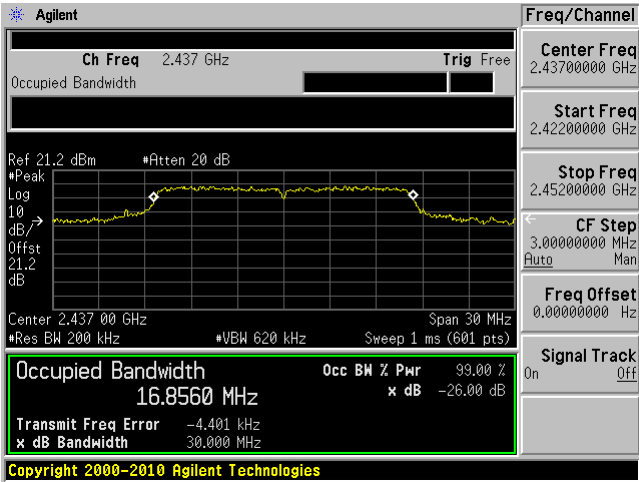


High Channel 2462 MHz

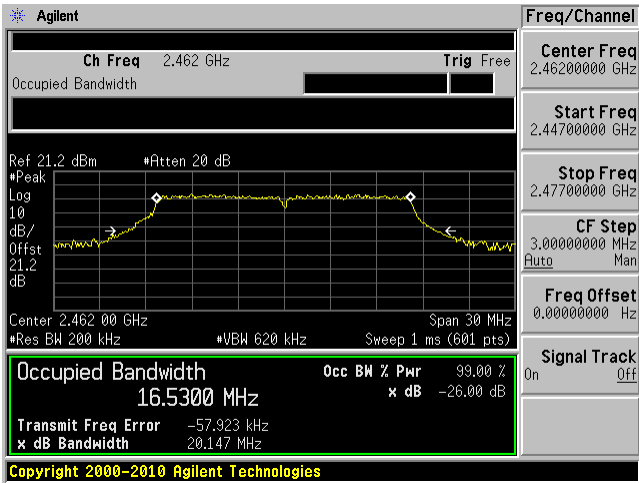


802.11g mode (Port B)


Low Channel 2412 MHz

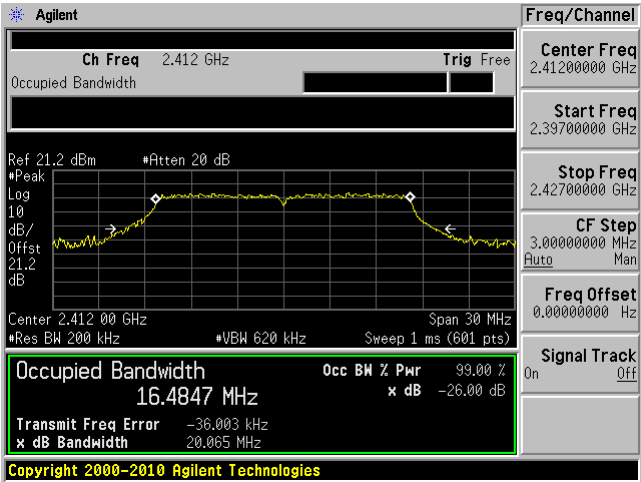

Middle Channel 2437 MHz

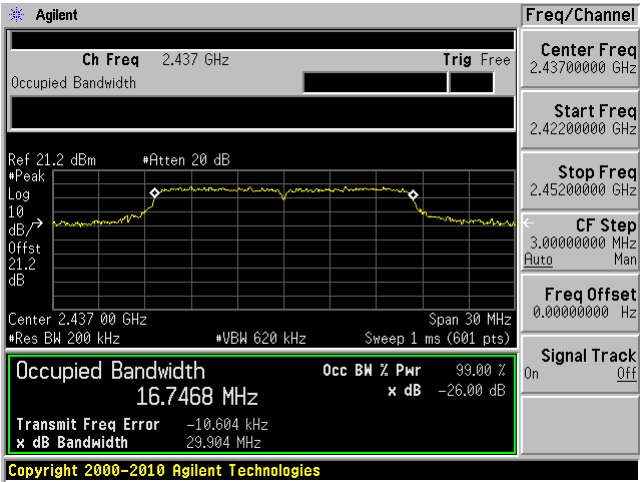


High Channel 2462 MHz

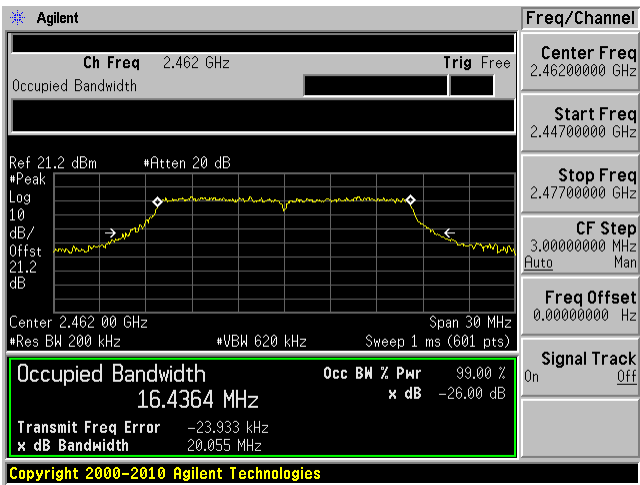


802.11n20 mode (Port A)


Low Channel 2412 MHz

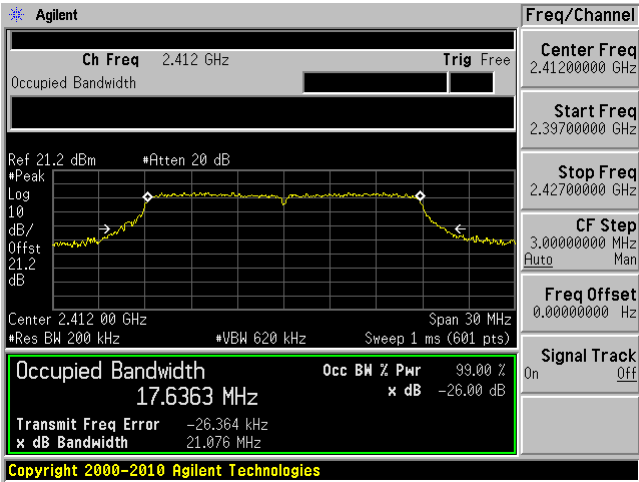

Middle Channel 2437 MHz

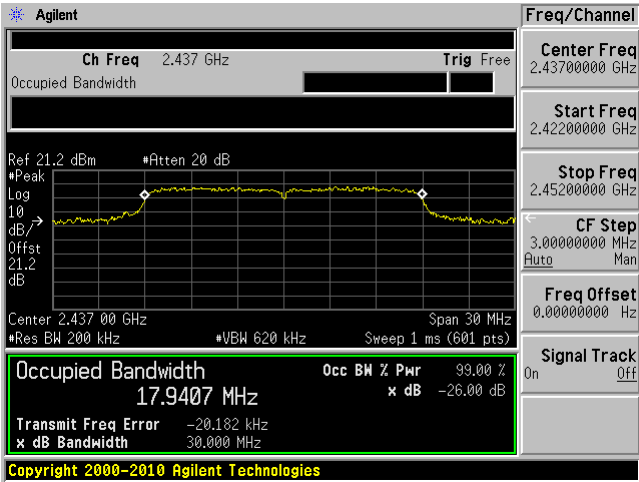


High Channel 2462 MHz

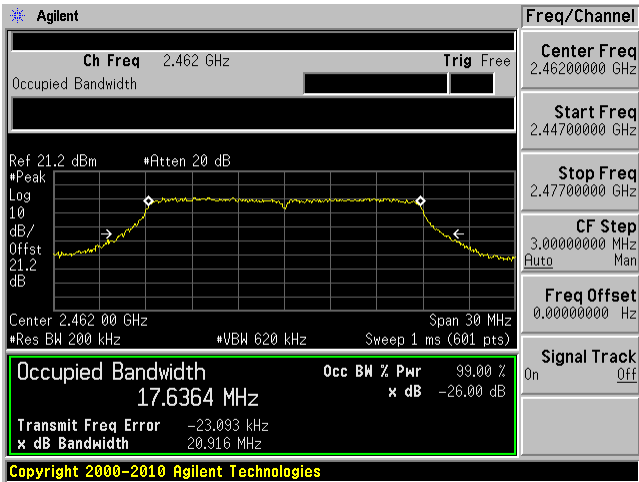


802.11n20 mode (Port A MIMO)


Low Channel 2412 MHz

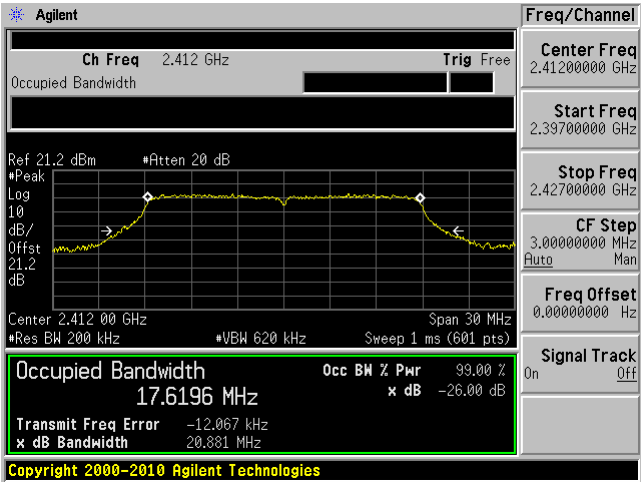

Middle Channel 2437 MHz

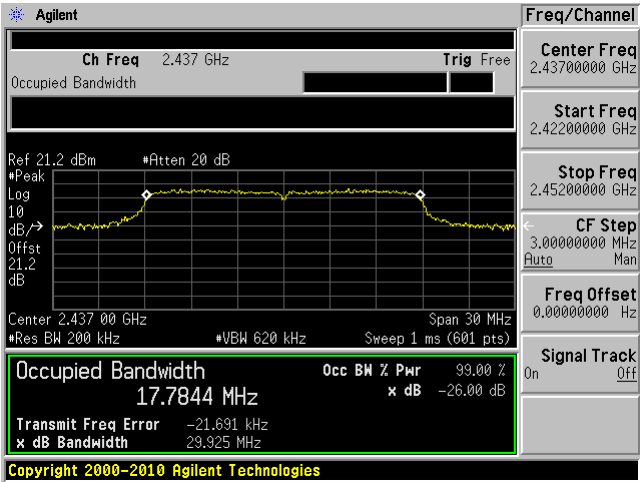


High Channel 2462 MHz

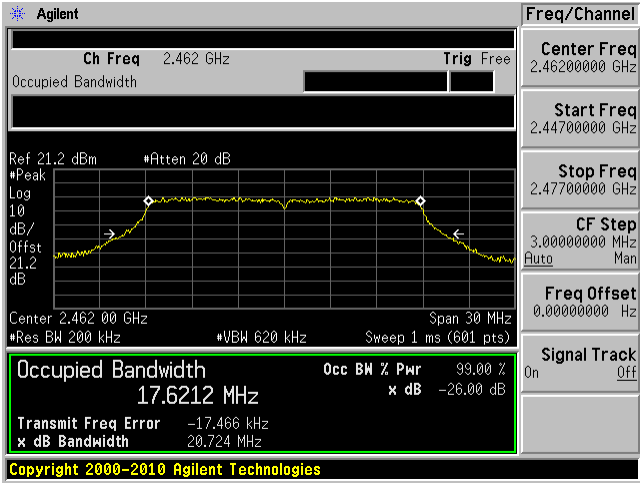


802.11n20 mode (Port B)


Low Channel 2412 MHz

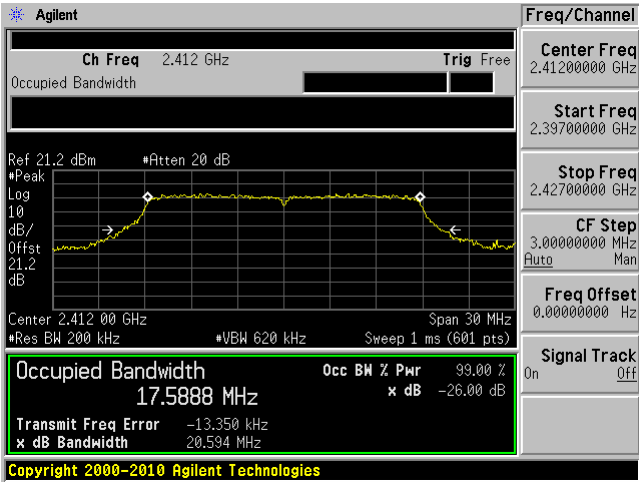

Middle Channel 2437 MHz

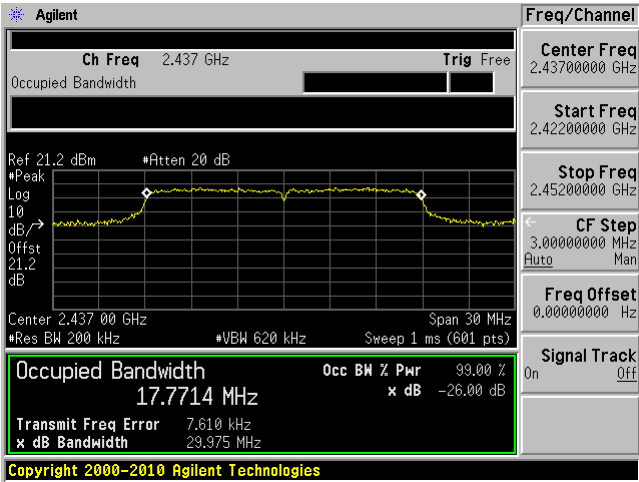


High Channel 2462 MHz

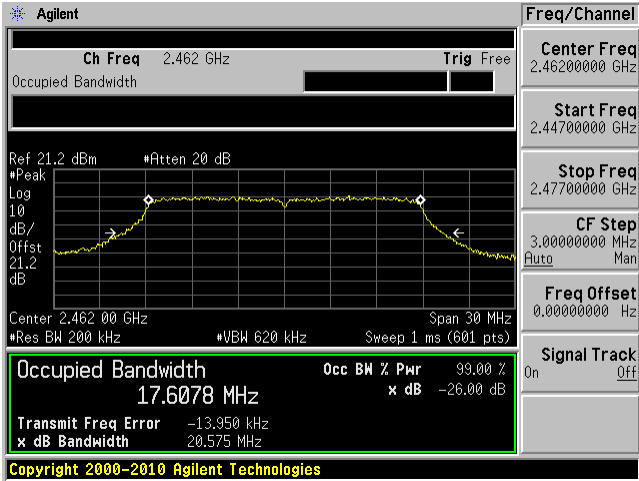


802.11n20 mode (Port B MIMO)


Low Channel 2412 MHz

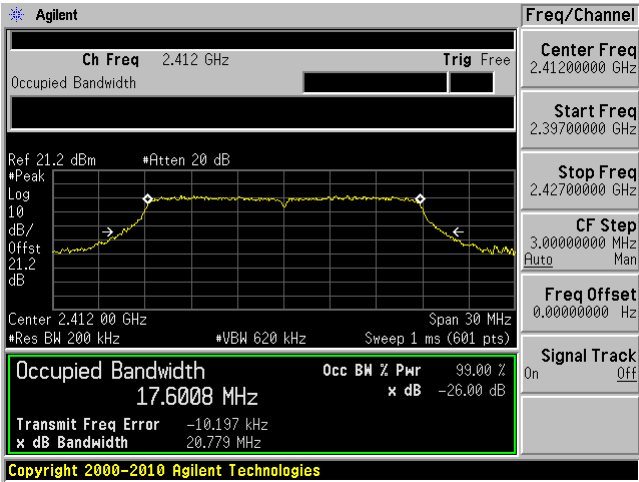

Middle Channel 2437 MHz

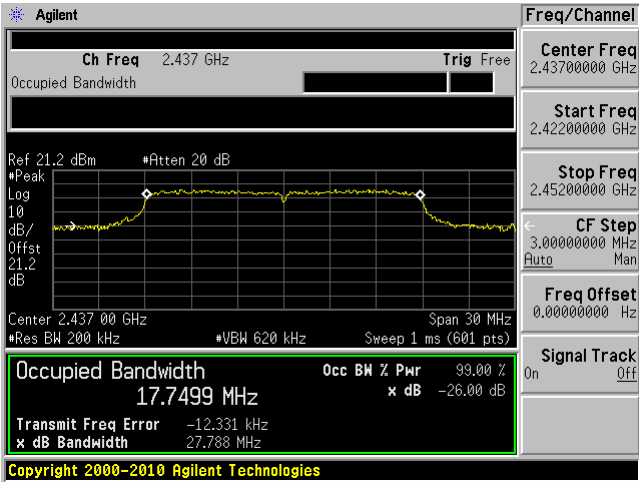

High Channel 2462 MHz

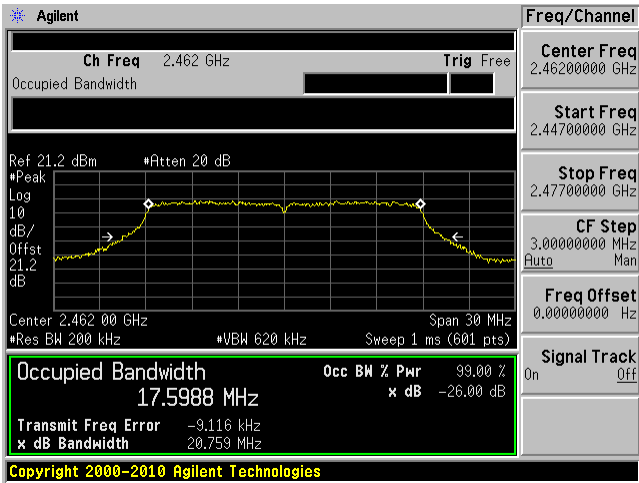

9 FCC §15.247(b) (3) & ISSED RSS-247 §5.4 (4) - Output Power Measurement

9.1 Applicable Standards

According to ECFR §15.247(b) (3) and ISSED RSS-247 §5.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
ETS- Lingerin	Power Sensor	7002-006	160097	2016-12-05	2 years
-	RF Cable	-	-	Each time ¹	N/A
-	20dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2017-07-13 in RF site.

9.5 Test Results

Conducted Average Output Power

Antenna Port	Channel	Frequency (MHz)	Average Power (dBm)	Limit (dBm)
802.11b mode				
A	1	2412	18.7	30
	6	2437	20.63	30
	11	2462	18.3	30
B	1	2412	18.21	30
	6	2437	20.13	30
	11	2462	17.63	30
802.11g mode				
A	1	2412	14.68	30
	6	2437	18.54	30
	11	2462	13.76	30
B	1	2412	13.72	30
	6	2437	17.97	30
	11	2462	13.25	30
802.11n20 mode				
A	1	2412	14.73	30
	6	2437	18.49	30
	11	2462	11.77	30
B	1	2412	13.7	30
	6	2437	17.88	30
	11	2462	11.29	30
A MIMO	1	2412	13.01	30
	6	2437	16.89	30
	11	2462	10.18	30
B MIMO	1	2412	12.22	30
	6	2437	16.34	30
	11	2462	9.87	30
A+B MIMO ²	1	2412	15.64	30
	6	2437	19.63	30
	11	2462	13.04	30

Note 1: For A+B MIMO, Average Power = $10 \cdot \log(10^{(A \text{ MIMO}/10)} + 10^{(B \text{ MIMO}/10)})$ dBm

Note 2: Per client's requirement, both SISO and MIMO mode for 802.11n were tested.

10 FCC §15.247(d) & ISED RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

10.1 Applicable Standards

According to ECFR §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISED RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	U. FL to SMA pigtail	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions


Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2017-07-14 in RF site.


10.5 Test Results

802.11b mode (Port A)

Low Channel 2412 MHz

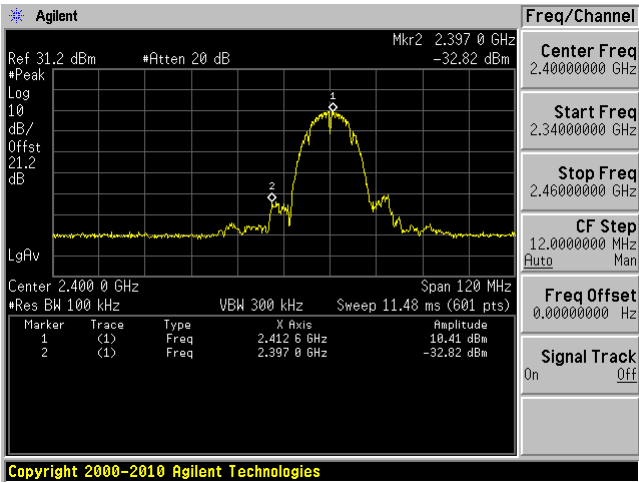


High Channel 2462 MHz

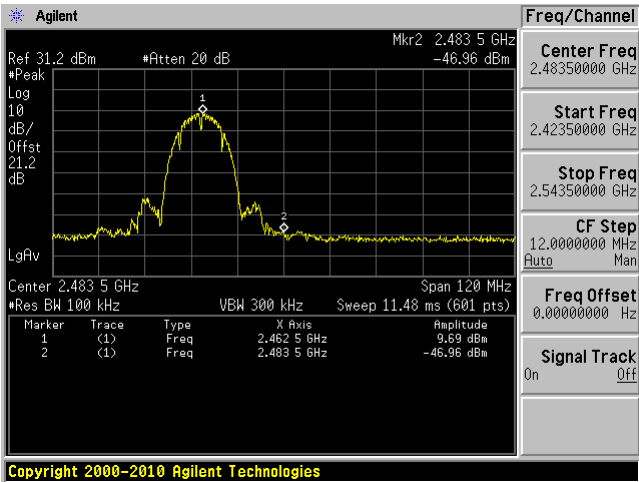


802.11b mode (Port B)

Low Channel 2412 MHz

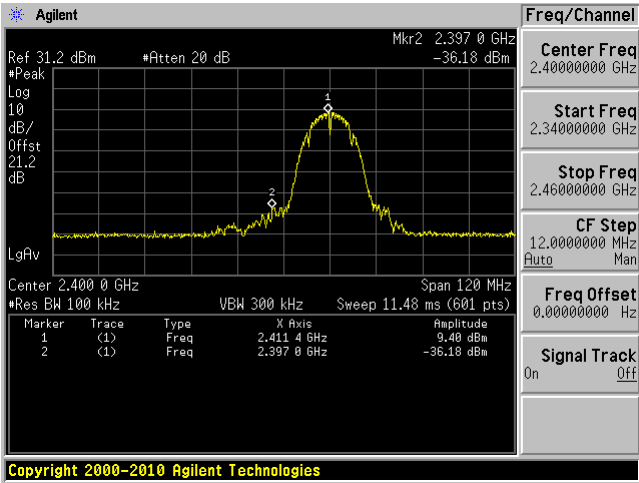


High Channel 2462 MHz

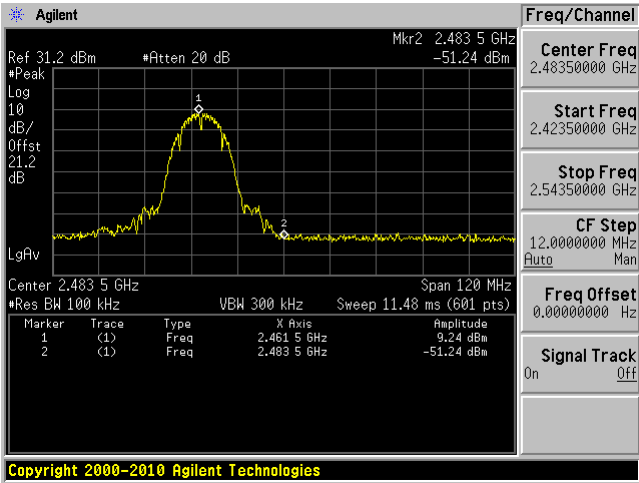


802.11g mode (Port A)

Low Channel 2412 MHz

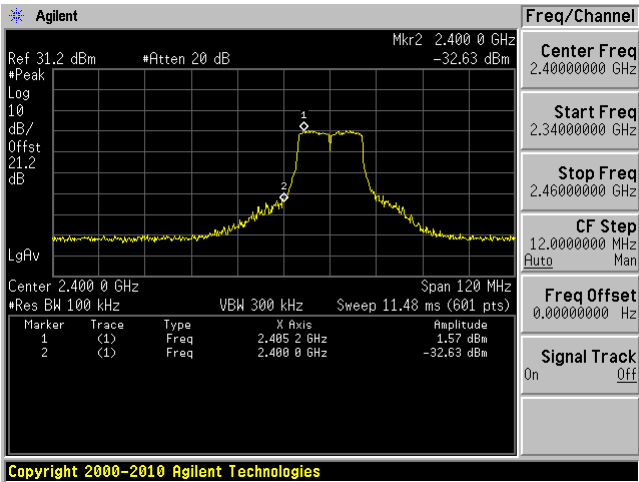


High Channel 2462 MHz

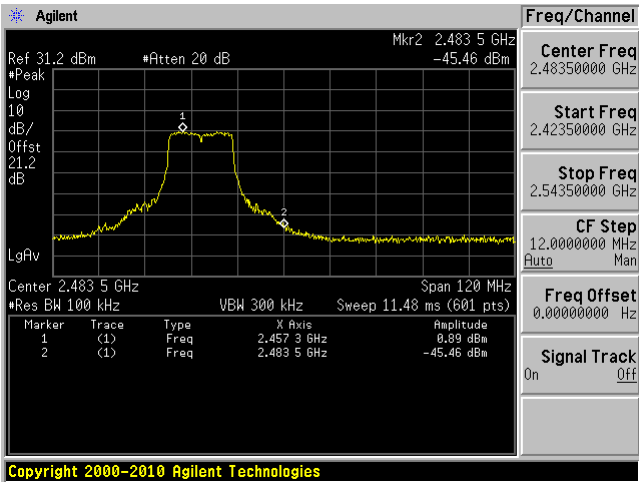


802.11g mode (Port B)

Low Channel 2412 MHz

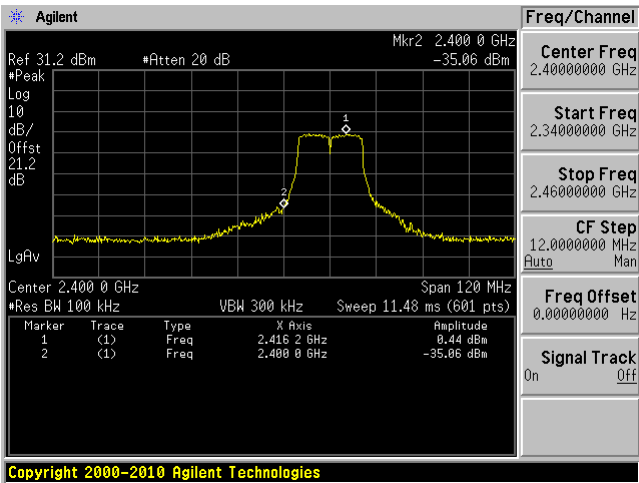


High Channel 2462 MHz

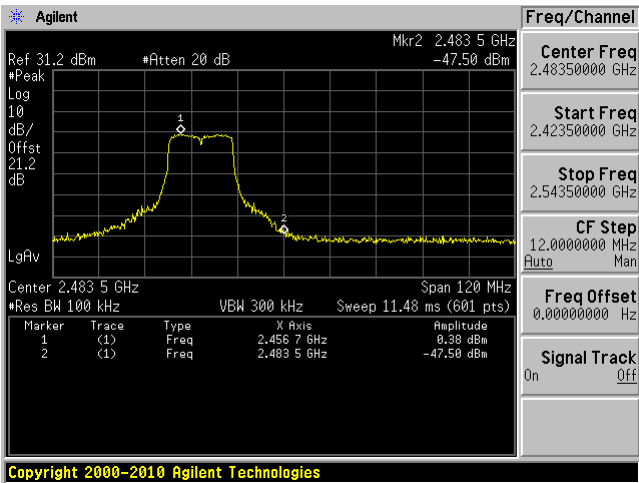


802.11n20 mode (Port A)

Low Channel 2412 MHz

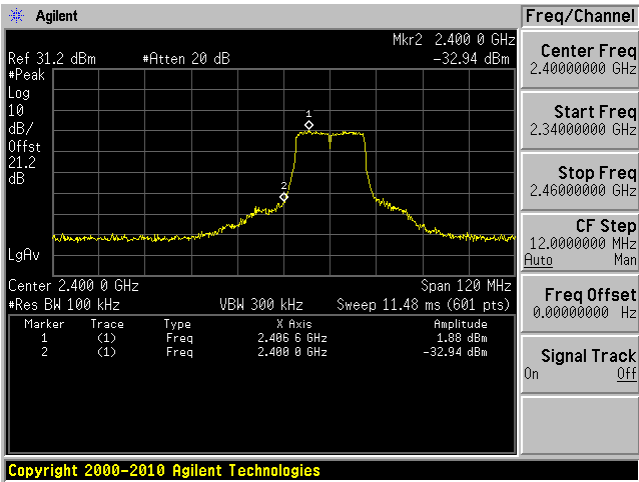


High Channel 2462 MHz

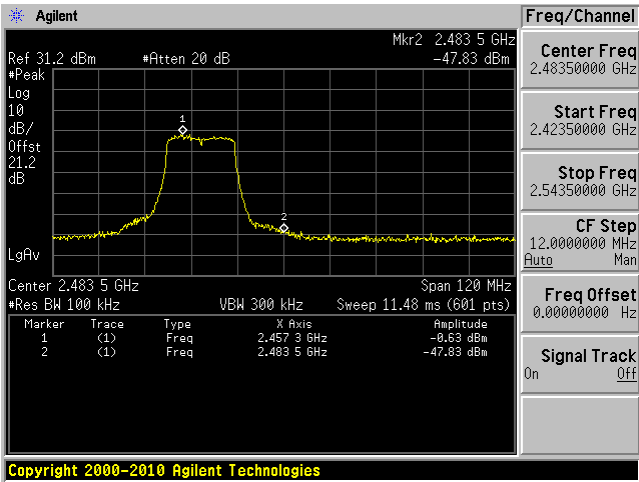


802.11n20 mode (Port MIMO A)

Low Channel 2412 MHz

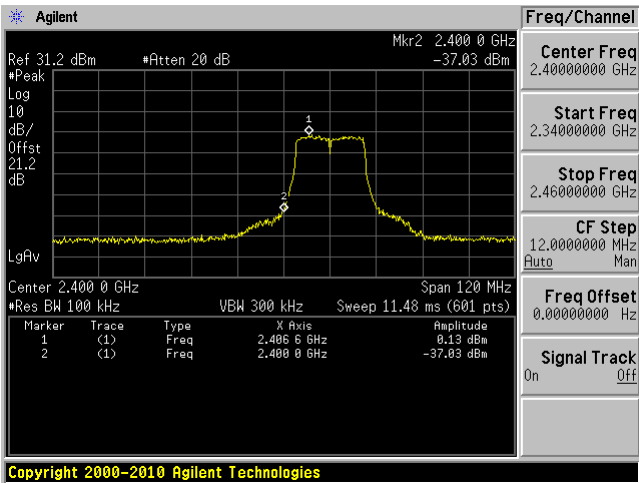


High Channel 2462 MHz

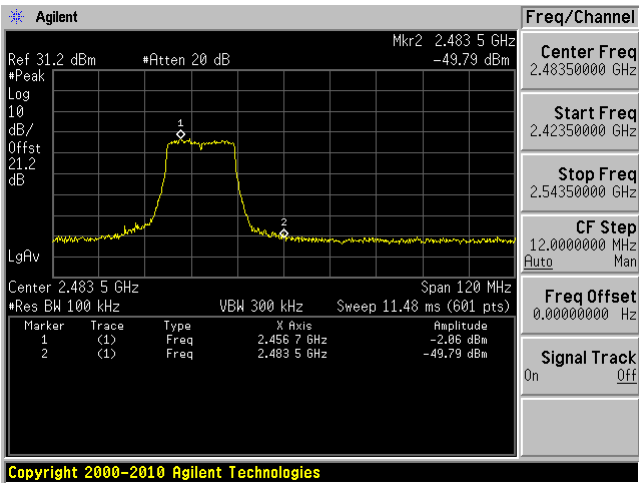


802.11n20 mode (Port B)

Low Channel 2412 MHz

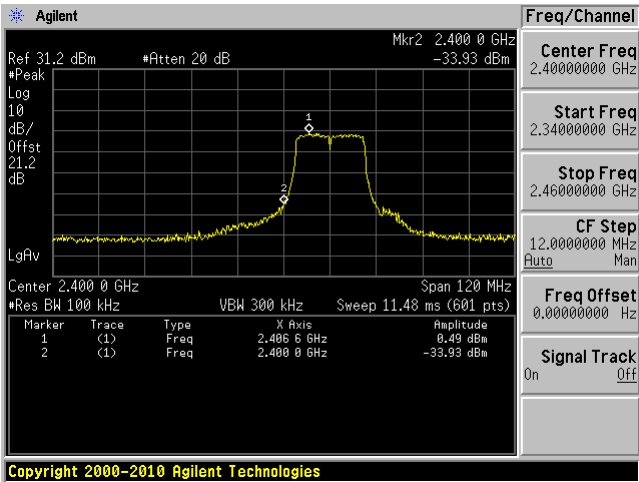


High Channel 2462 MHz

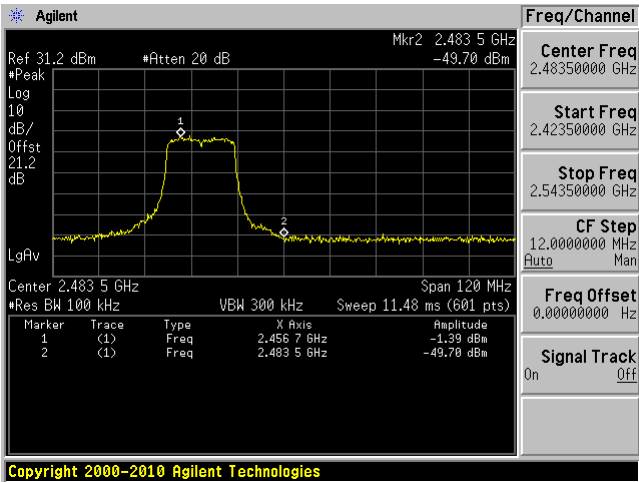


802.11n20 mode (Port MIMO B)

Low Channel 2412 MHz

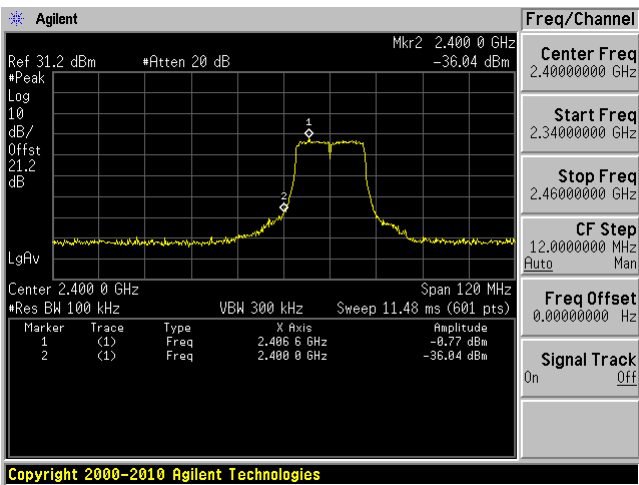

High Channel 2462 MHz

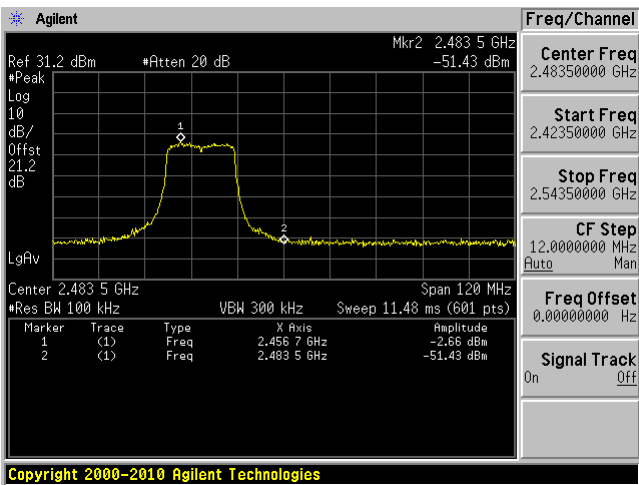

Note: Per client’s requirement, both SISO and MIMO mode for 802.11n were tested.

11 FCC §15.247(e) & ISED RSS-247 §5.2(2) - Power Spectral Density

11.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §5.2 (2) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	U. FL to SMA pigtail	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

11.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Vincent Licata on 2017-07-14 in RF site.

11.5 Test Results

Antenna Port	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode				
A	Low	2412	-9.16	8
	Middle	2437	-7.67	8
	High	2462	-10.14	8
B	Low	2412	-10.33	8
	Middle	2437	-7.96	8
	High	2462	-10.58	8
802.11g mode				
A	Low	2412	-12.25	8
	Middle	2437	-8.22	8
	High	2462	-13.62	8
B	Low	2412	-13.77	8
	Middle	2437	-8.77	8
	High	2462	-14.09	8
802.11n20 mode				
A	Low	2412	-11.45	8
	Middle	2437	-7.88	8
	High	2462	-14.42	8
B	Low	2412	-13.58	8
	Middle	2437	-8.54	8
	High	2462	-16.10	8
A MIMO	Low	2412	-13.94	8
	Middle	2437	-9.91	8
	High	2462	-15.50	8
B MIMO	Low	2412	-15.53	8
	Middle	2437	-10.52	8
	High	2462	-16.96	8
A+B MIMO ¹	Low	2412	-11.65	8
	Middle	2437	-7.19	8
	High	2462	-13.16	8


Note 1: For A+B MIMO, $PSD = 10 \cdot \log(10^{(A \text{ MIMO}/10)} + 10^{(B \text{ MIMO}/10)})$ dBm/3kHz

Note 2: per client requirement, both SISO and MIMO mode for 802.11n were tested.


Please refer to the following plots for detailed test results

802.11b mode (Port A)


Low Channel 2412 MHz

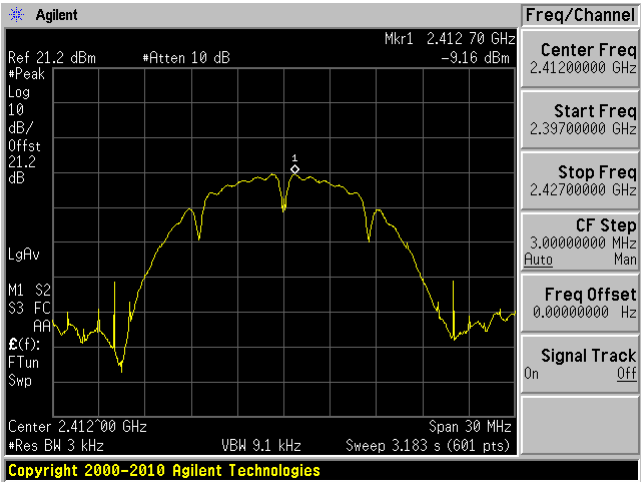

Middle Channel 2437 MHz

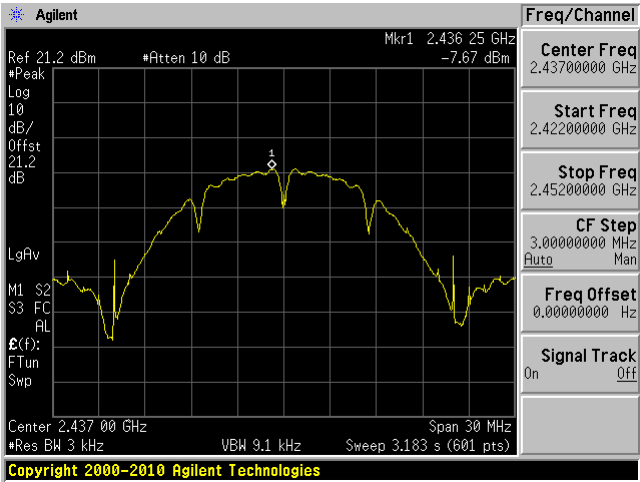


High Channel 2462 MHz

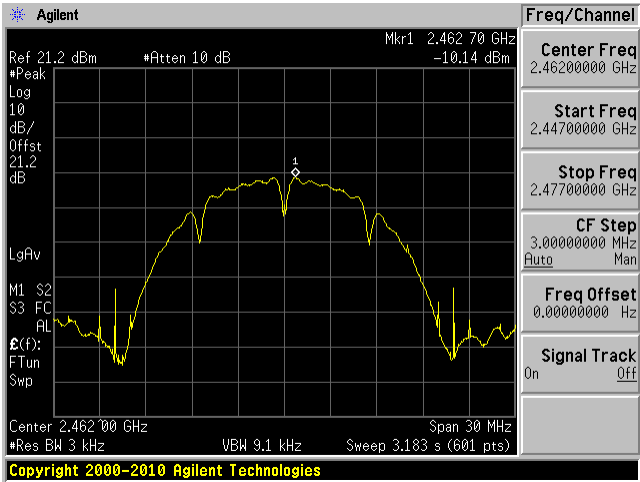


802.11b mode (Port B)


Low Channel 2412 MHz

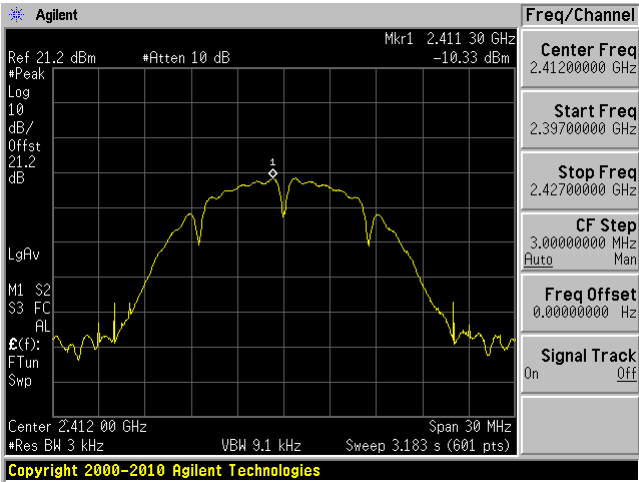

Middle Channel 2437 MHz

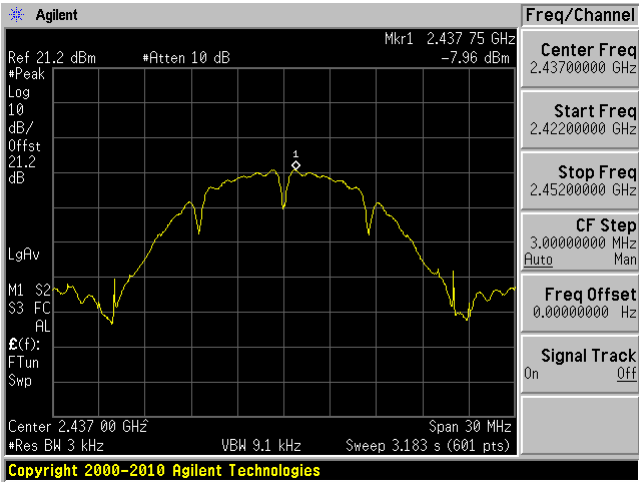


High Channel 2462 MHz

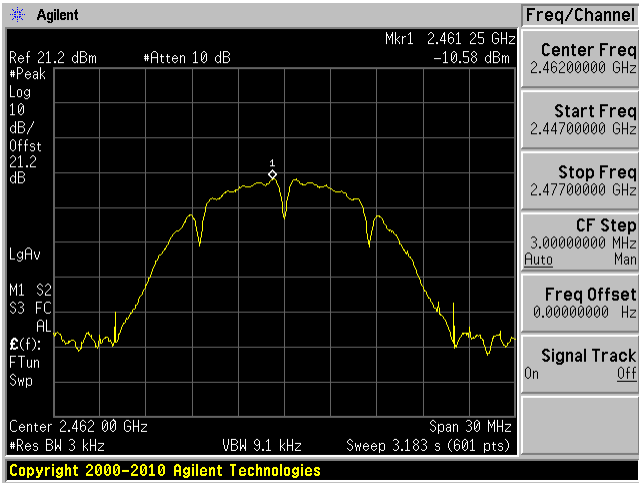


802.11g mode (Port A)


Low Channel 2412 MHz

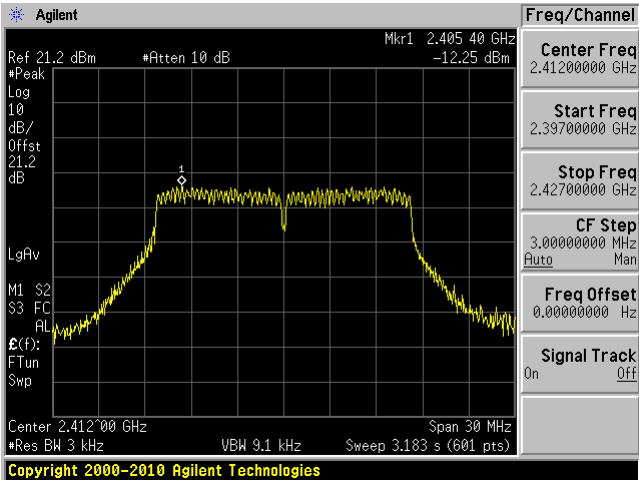

Middle Channel 2437 MHz

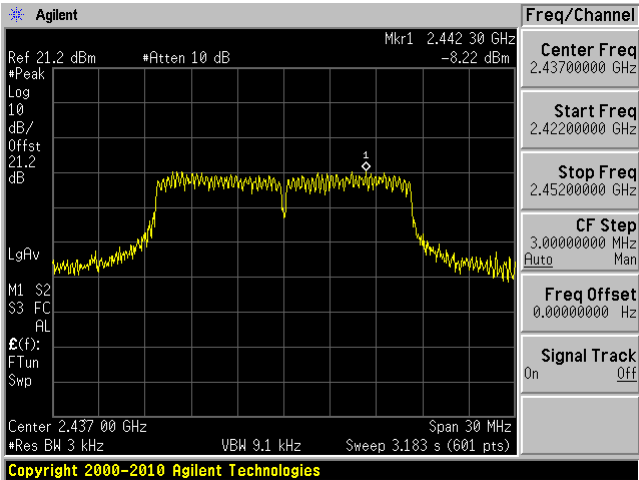


High Channel 2462 MHz

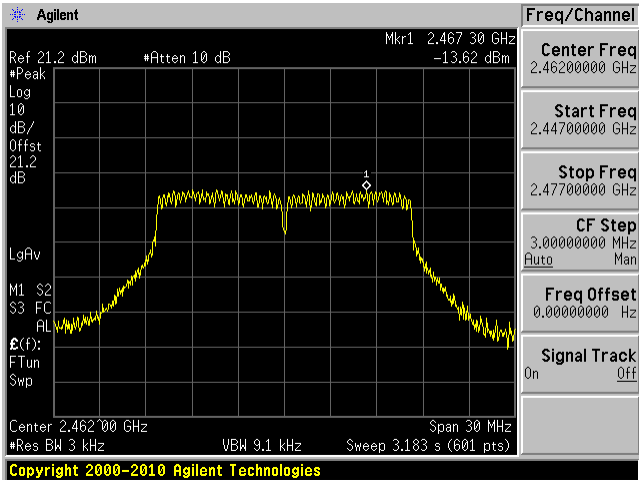


802.11g mode (Port B)


Low Channel 2412 MHz

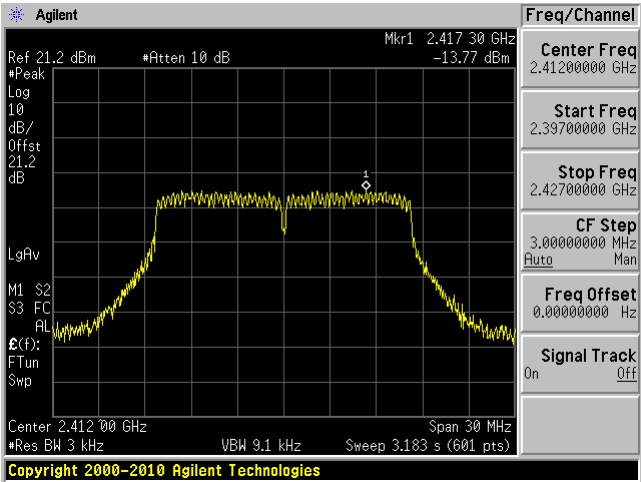

Middle Channel 2437 MHz

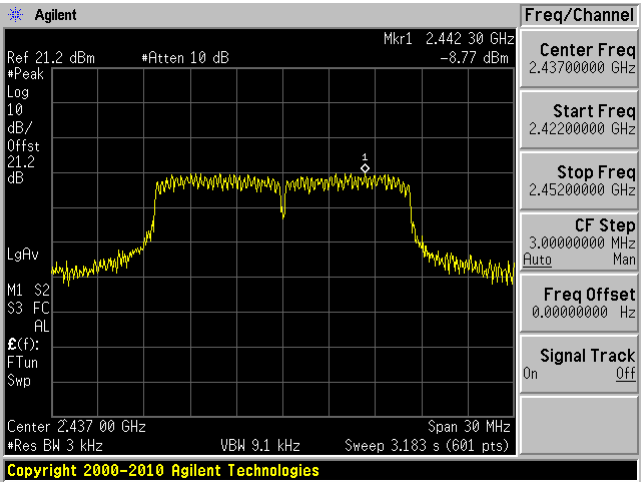


High Channel 2462 MHz

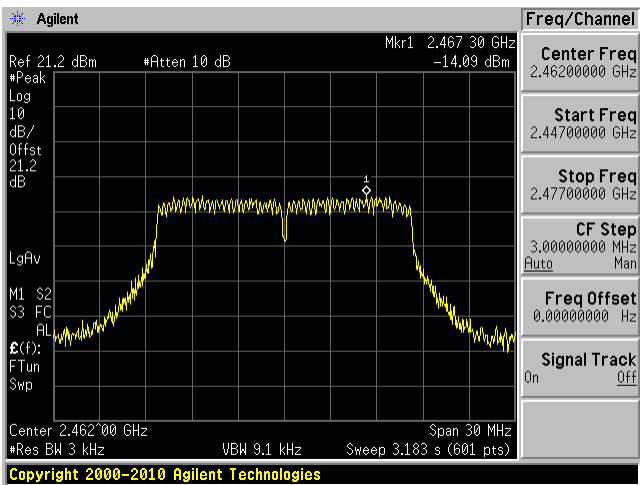


802.11n20 mode (Port A)


Low Channel 2412 MHz

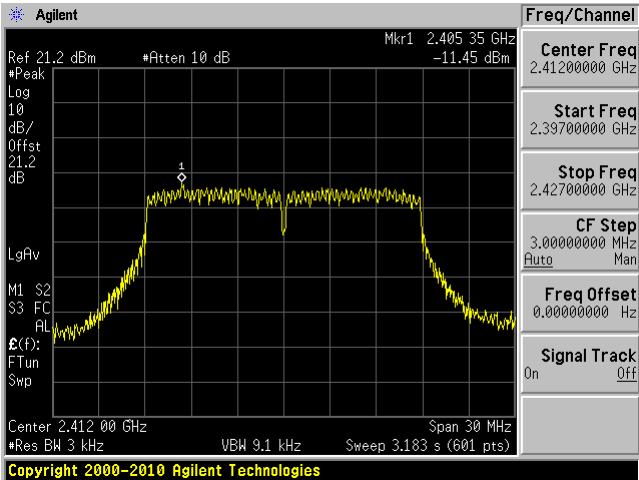

Middle Channel 2437 MHz

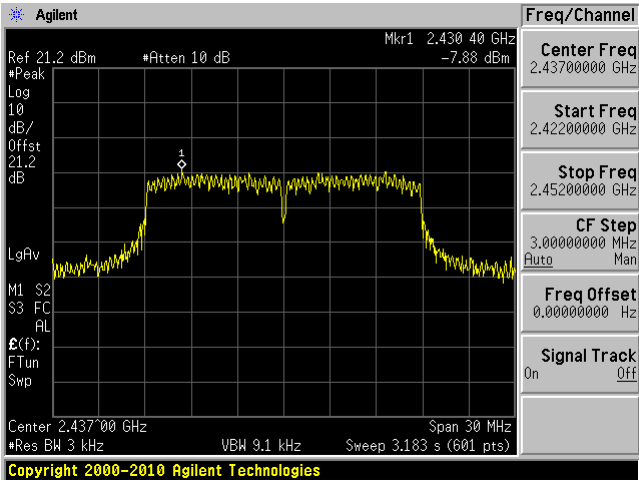


High Channel 2462 MHz

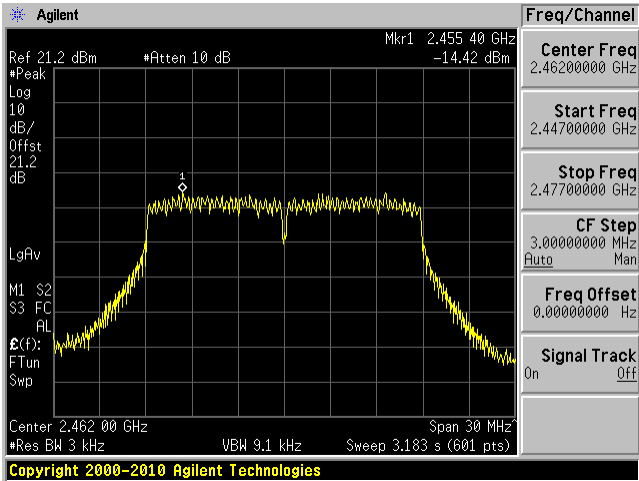


802.11n20 mode (Port A MIMO)


Low Channel 2412 MHz

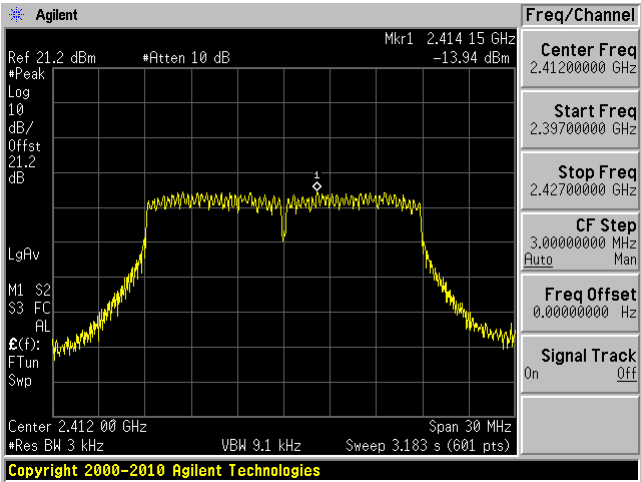

Middle Channel 2437 MHz

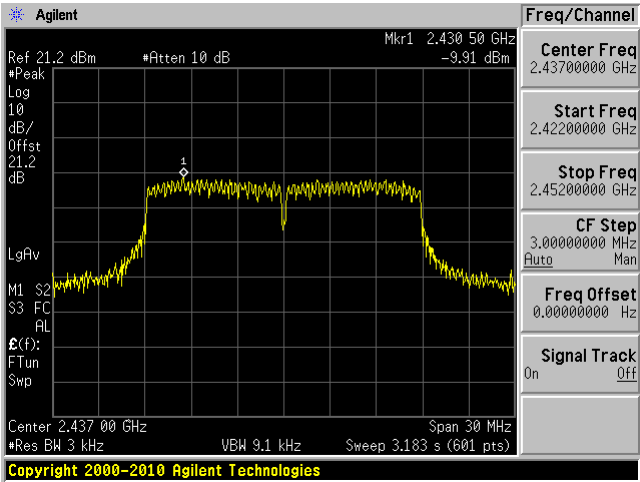


High Channel 2462 MHz

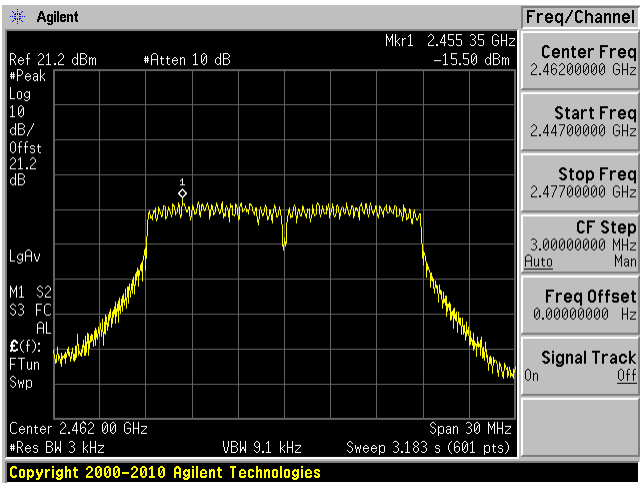


802.11n20 mode (Port B)


Low Channel 2412 MHz

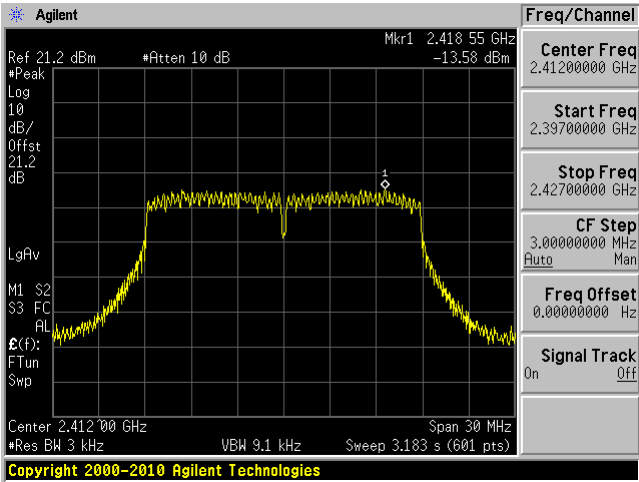

Middle Channel 2437 MHz

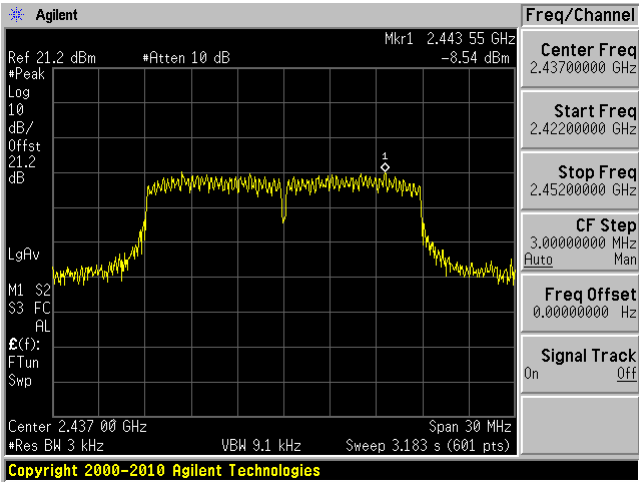


High Channel 2462 MHz

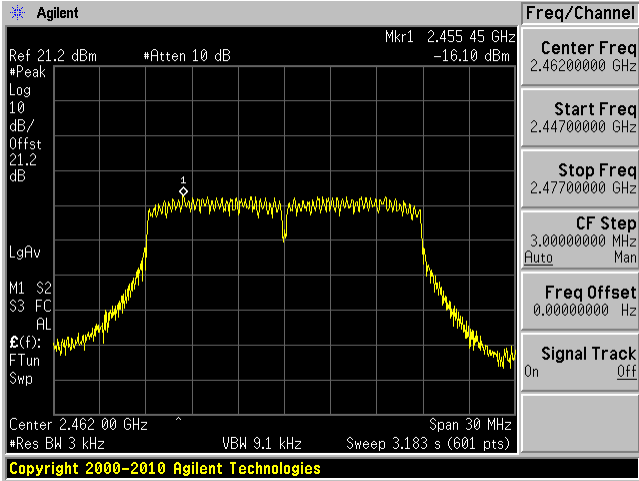


802.11n20 mode (Port B MIMO)


Low Channel 2412 MHz

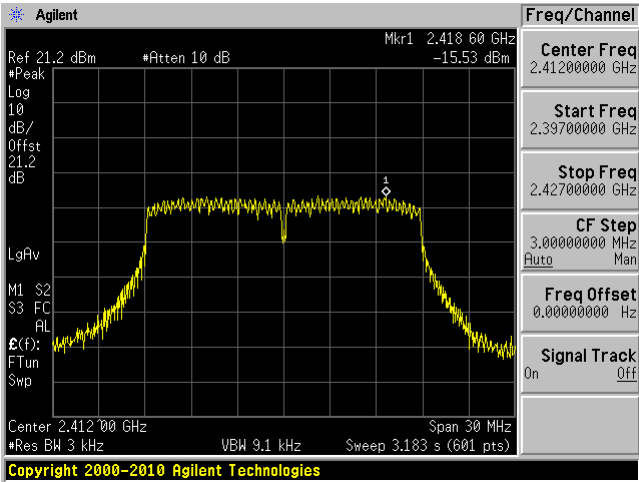

Middle Channel 2437 MHz

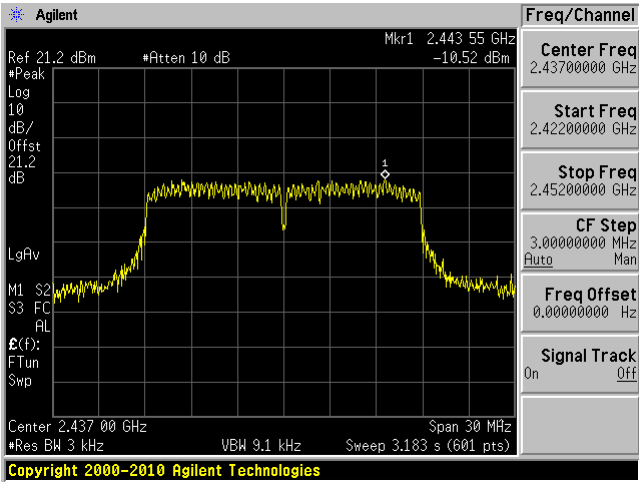

High Channel 2462 MHz

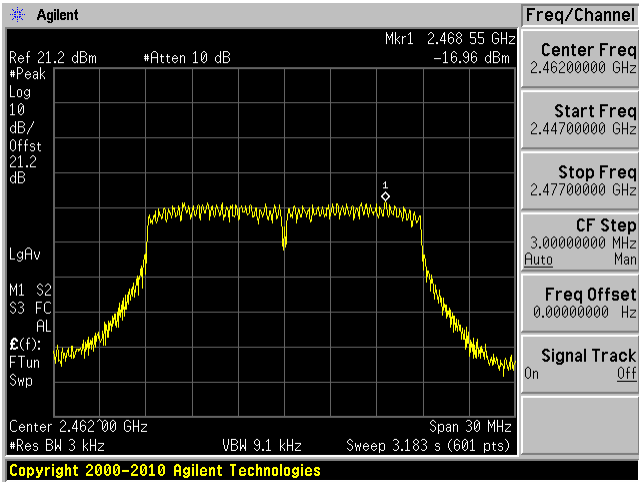

12 FCC §15.247(d) & ISED RSS-247 §5.5 and ISED RSS-GEN §8.9 - Spurious Emissions at Antenna Terminals

12.1 Applicable Standards

For ECFR §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

12.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	U. FL to SMA pigtail	-	-	Each time ¹	N/A
-	20 dB attenuator	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.*

12.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa


The testing was performed by Vincent Licata on 2017-07-14 in RF site.

12.5 Test Results


Please refer to following plots.

802.11b mode (Port A)


Low Channel 30MHz – 3 GHz

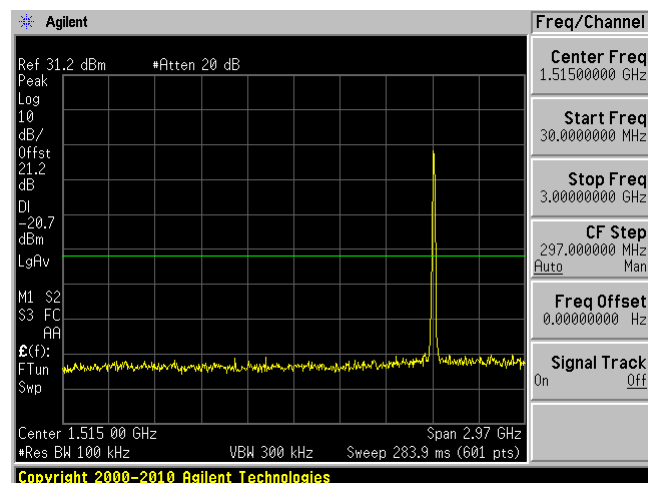


Low Channel 3 GHz – 26 GHz

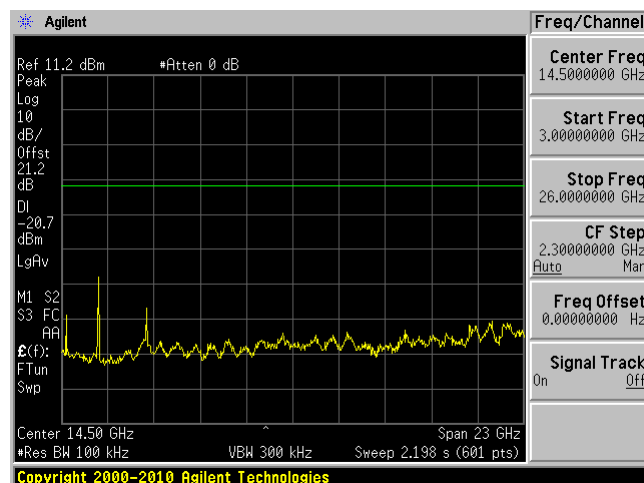


Middle Channel 30 MHz – 3 GHz

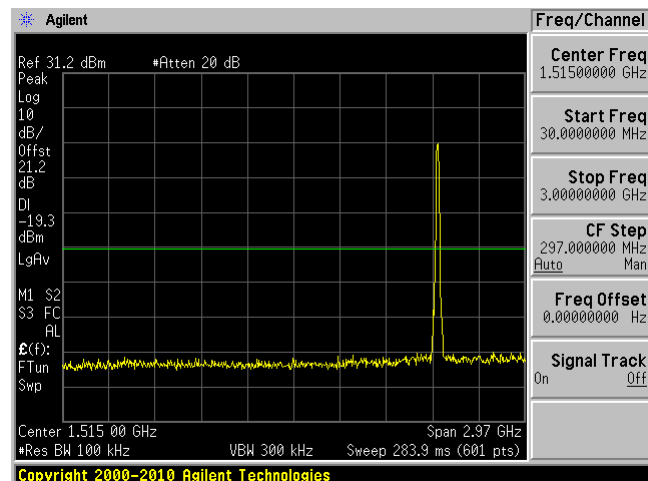


Middle Channel 3 GHz – 26 GHz

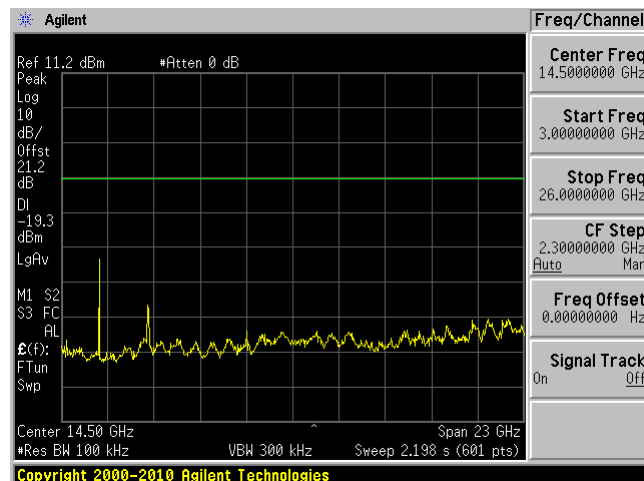

High Channel 30 MHz – 3 GHz

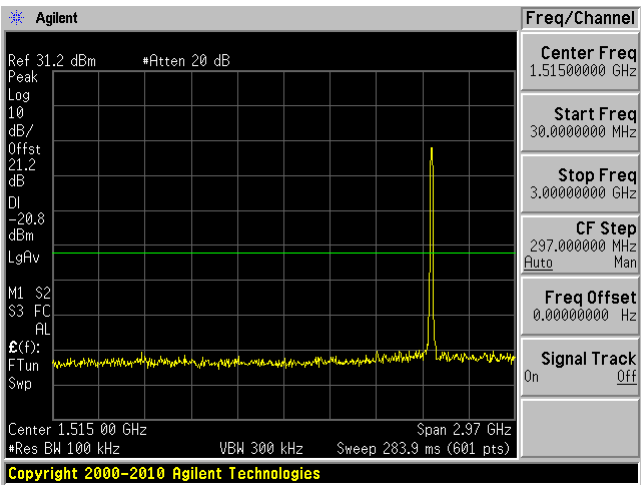


High Channel 3 GHz – 26 GHz

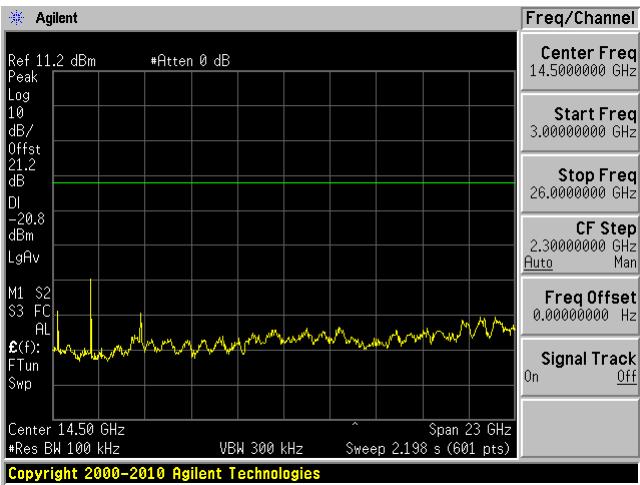


802.11b mode (Port B)


Low Channel 30 MHz – 3 GHz

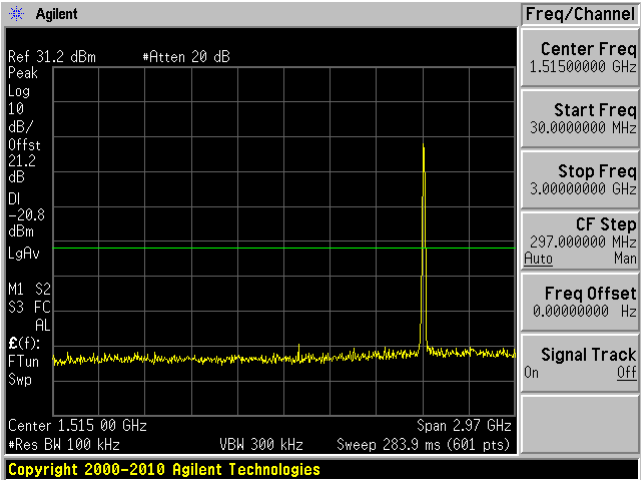


Low Channel 3 GHz – 26 GHz

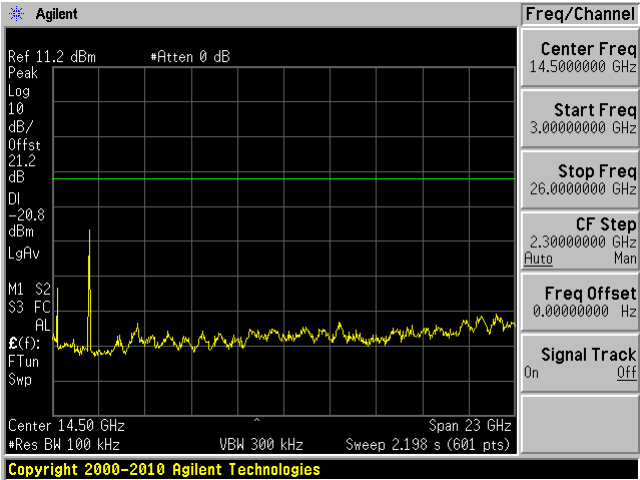


Middle Channel 30 MHz – 3 GHz

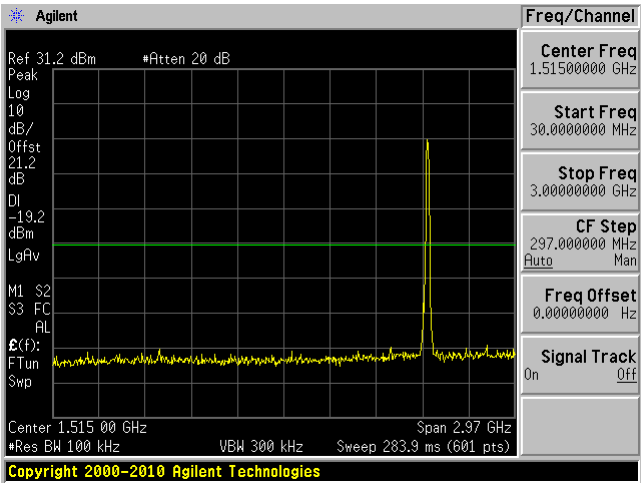


Middle Channel 3 GHz – 26 GHz

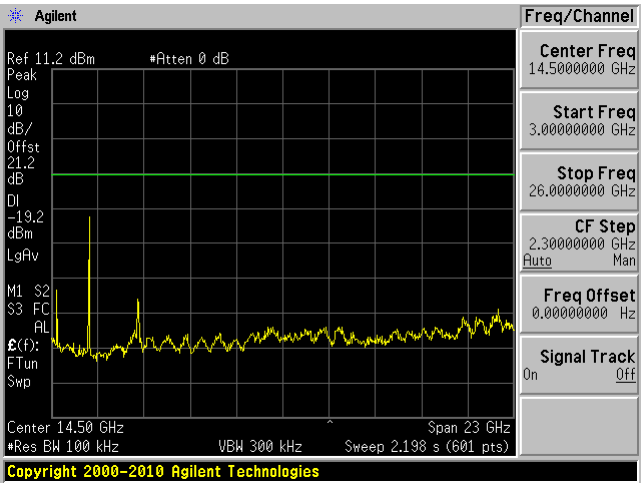

High Channel 30 MHz – 3 GHz

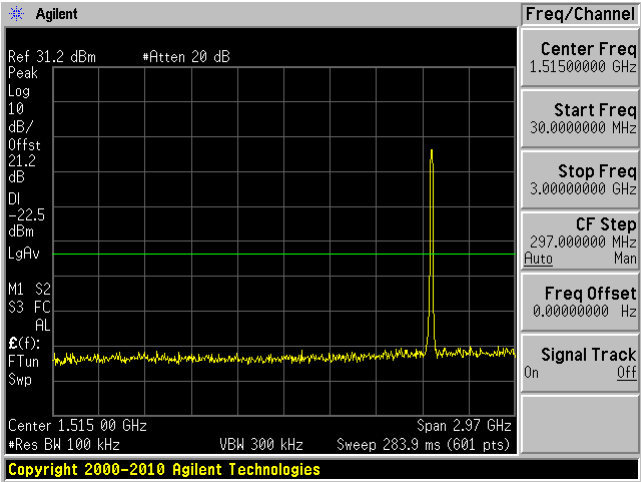


High Channel 3 GHz – 26 GHz

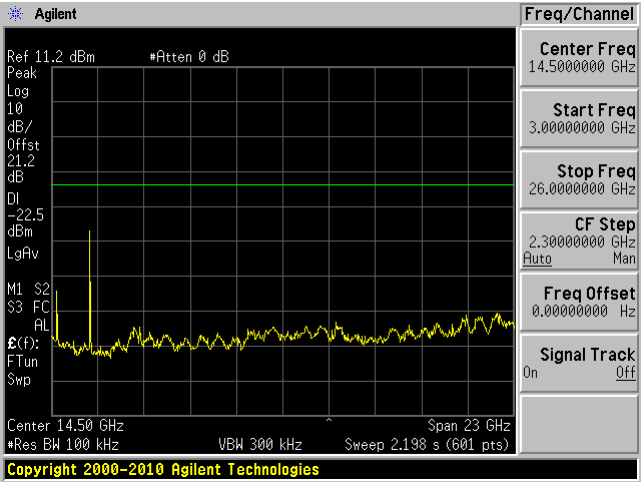


802.11g mode (Port A)


Low Channel 30 MHz – 3 GHz

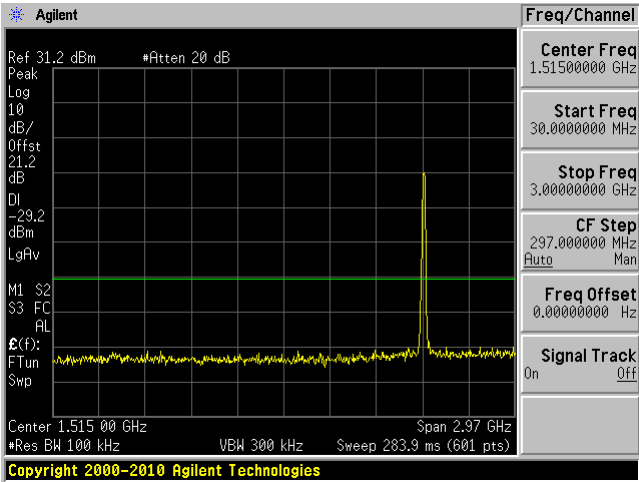


Low Channel 3 GHz – 26 GHz

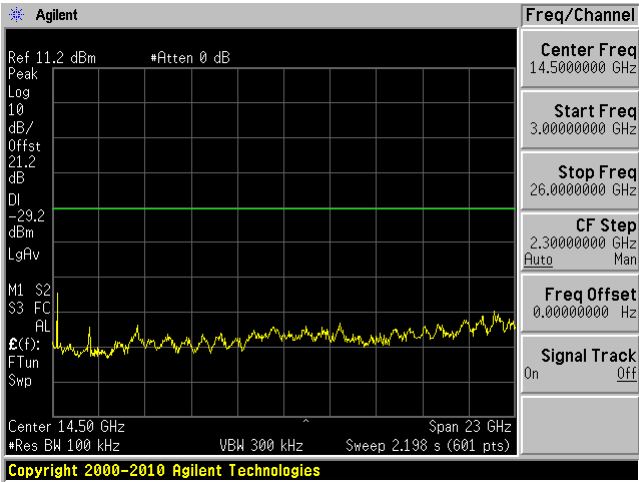


Middle Channel 30 MHz – 3 GHz

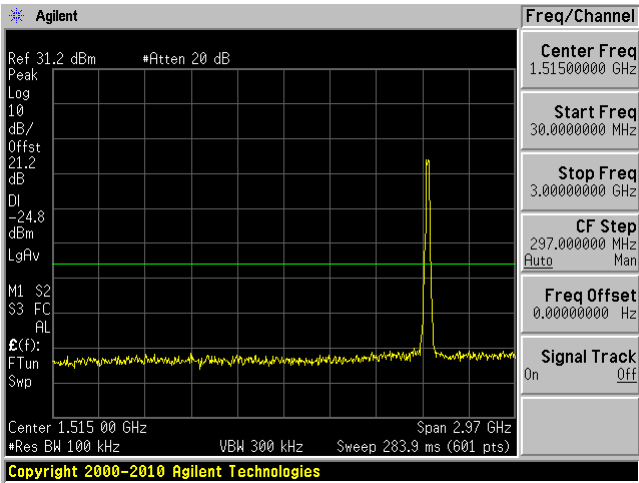


Middle Channel 3 GHz – 26 GHz

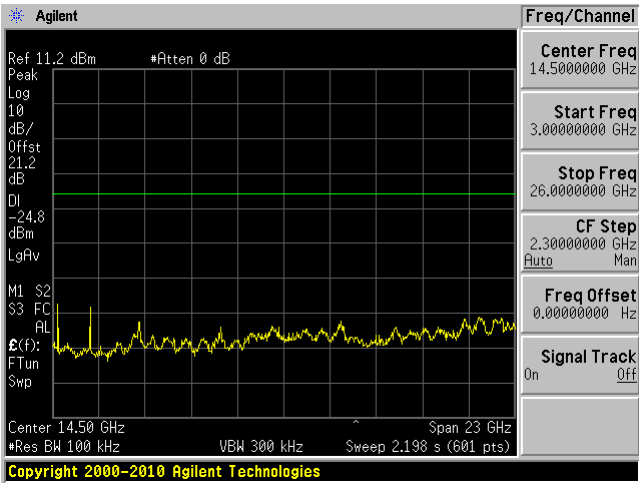

High Channel 30 MHz – 3 GHz

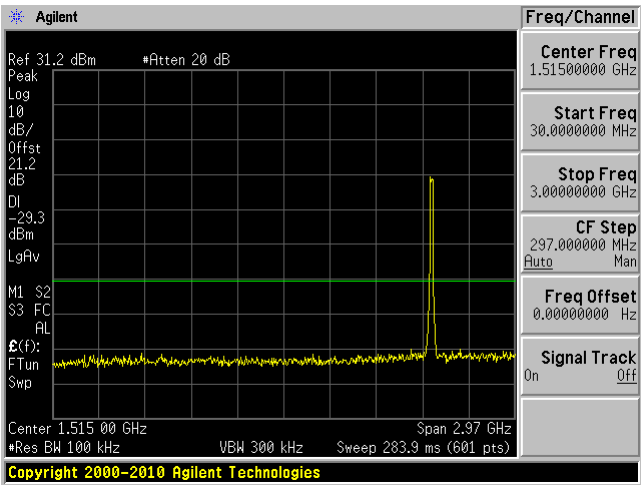


High Channel 3 GHz – 26 GHz

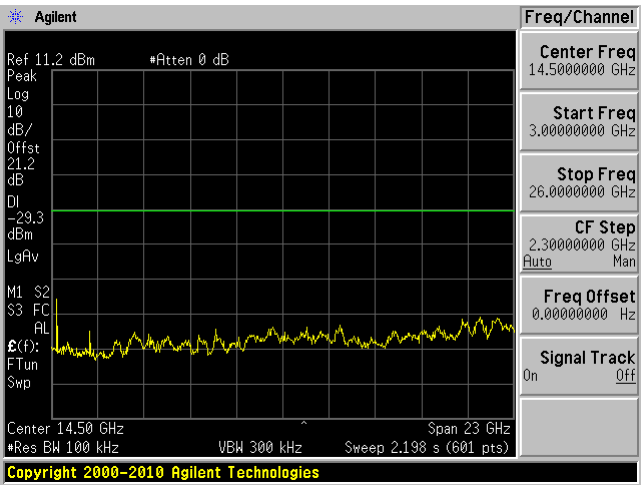


802.11g mode (Port B)


Low Channel 30 MHz – 3 GHz

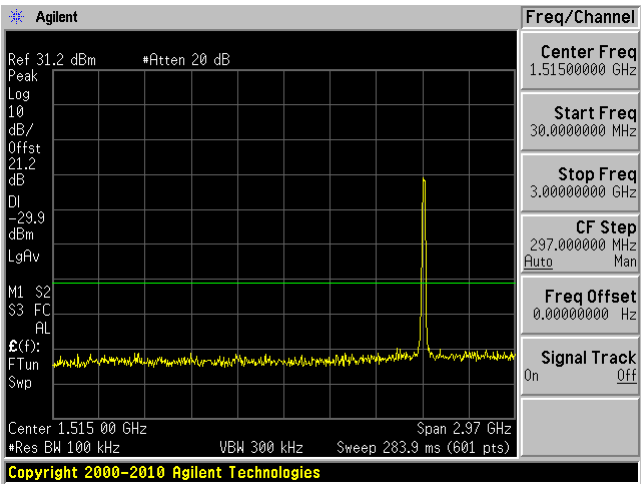


Low Channel 3 GHz – 26 GHz

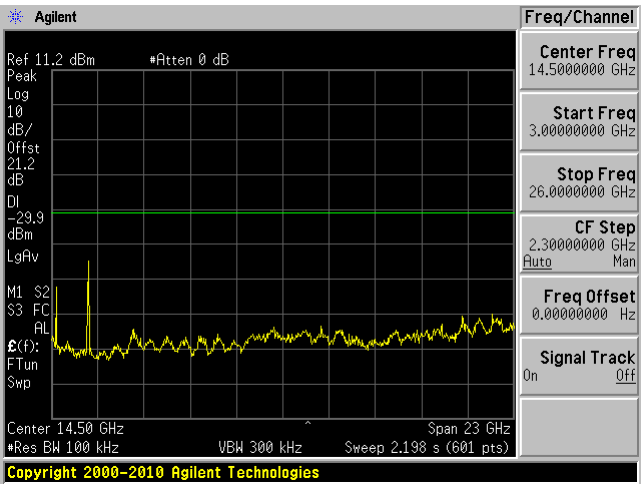


Middle Channel 30 MHz – 3 GHz

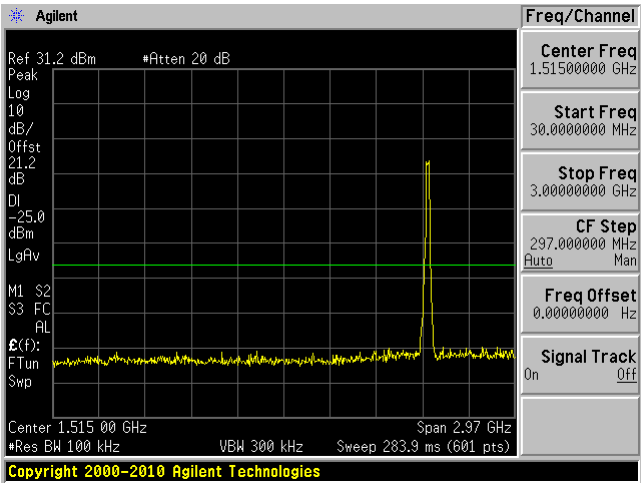


Middle Channel 3 GHz – 26 GHz

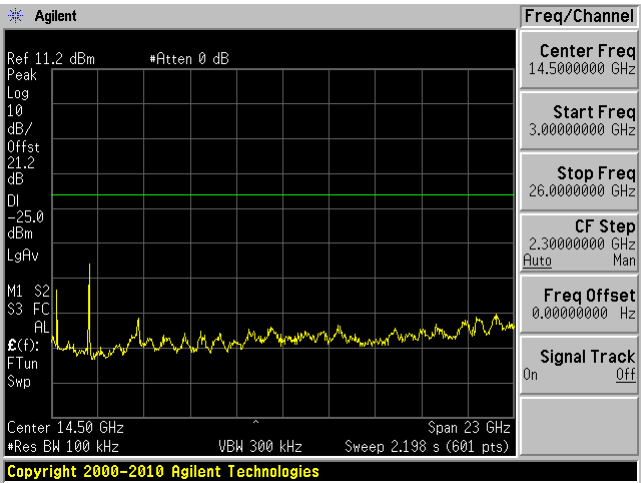

High Channel 30 MHz – 3 GHz

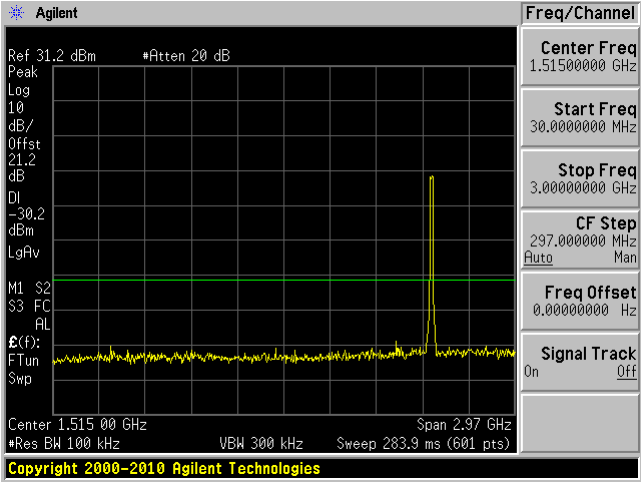


High Channel 3 GHz – 26 GHz

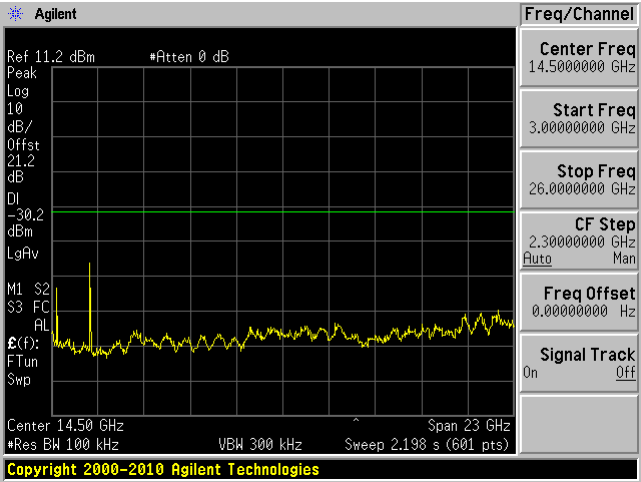


802.11n20 mode (Port A)


Low Channel 30 MHz – 3 GHz

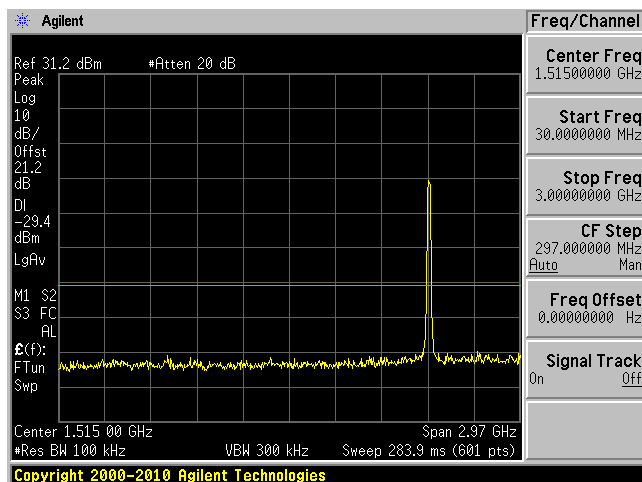


Low Channel 3 GHz – 26 GHz

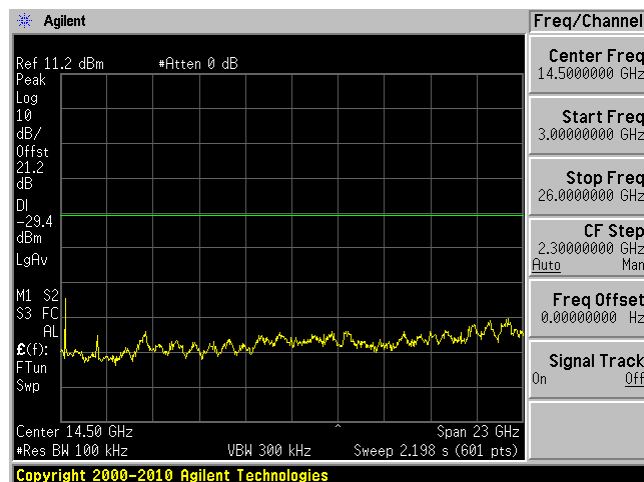


Middle Channel 30 MHz – 3 GHz

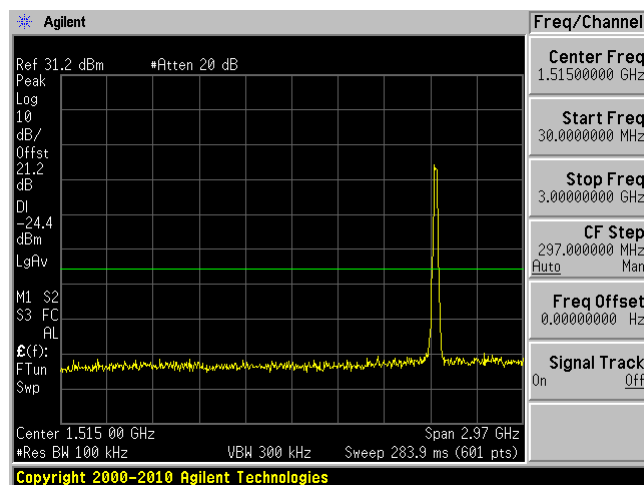


Middle Channel 3 GHz – 26 GHz

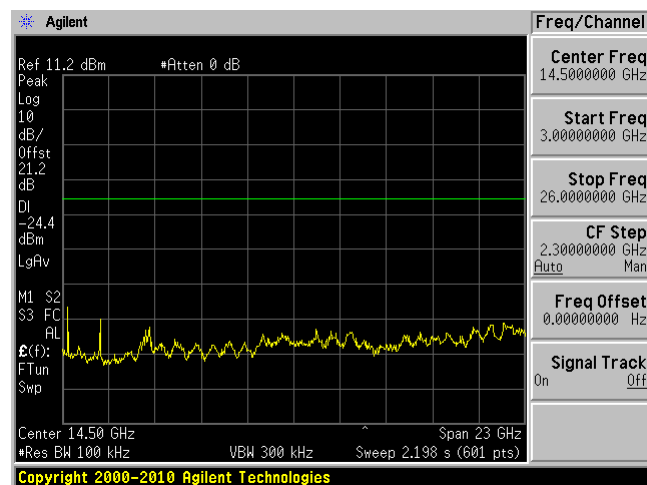

High Channel 30 MHz – 3 GHz

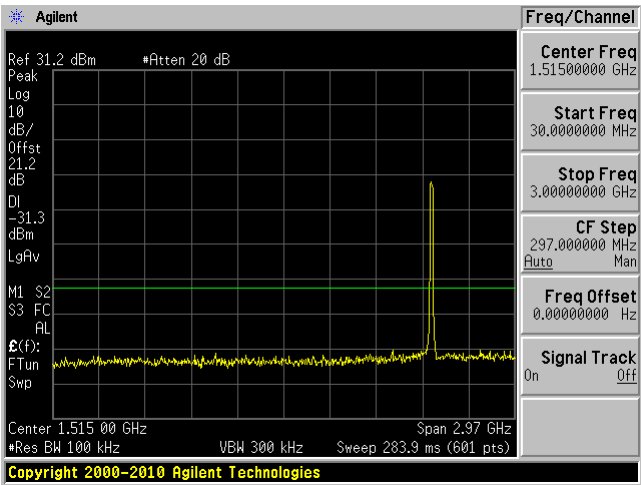


High Channel 3 GHz – 26 GHz

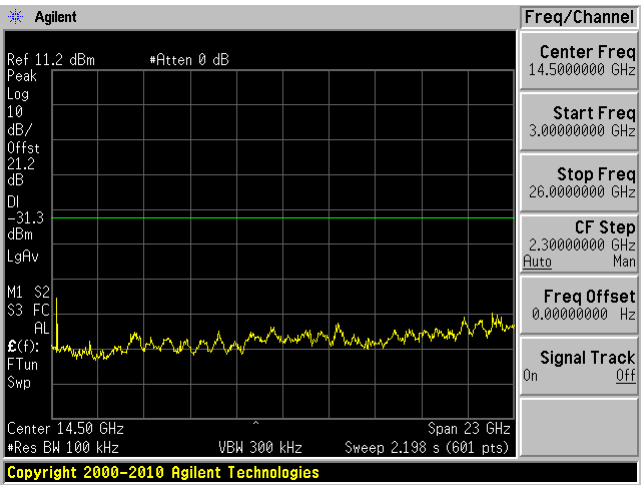


802.11n20 mode (Port A MIMO)


Low Channel 30 MHz – 3 GHz

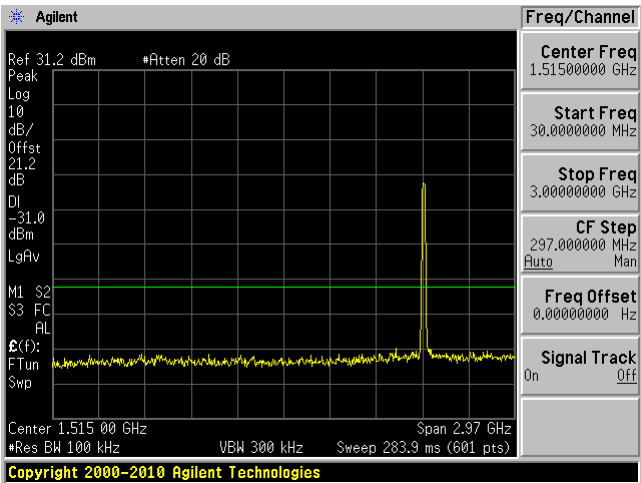


Low Channel 3 GHz – 26 GHz

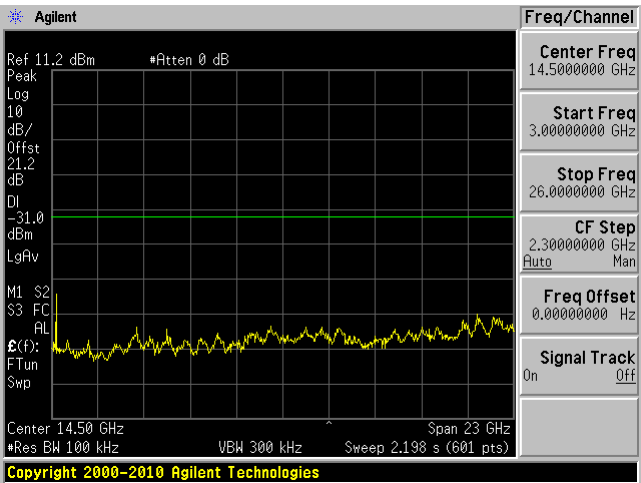


Middle Channel 30 MHz – 3 GHz

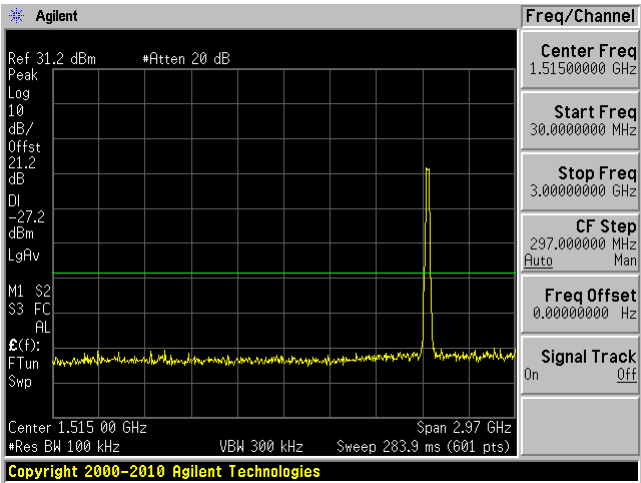


Middle Channel 3 GHz – 26 GHz

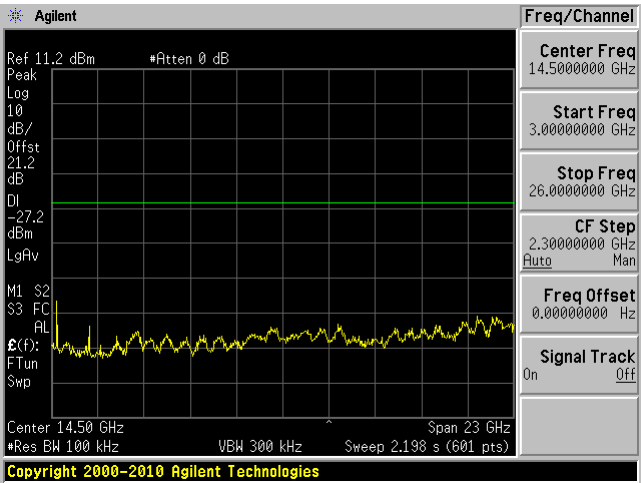

High Channel 30 MHz – 3 GHz

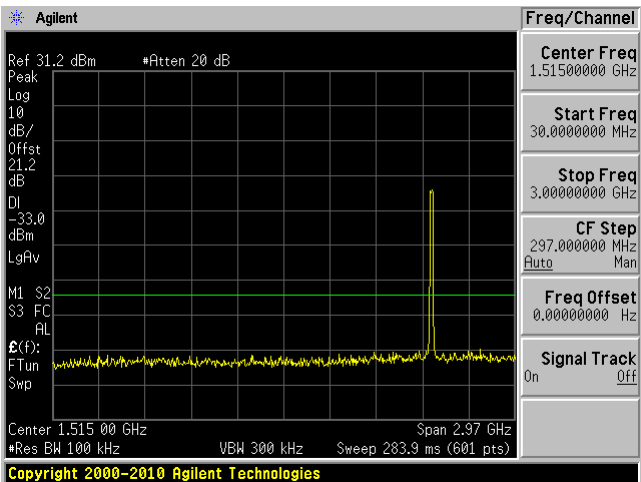


High Channel 3 GHz – 26 GHz

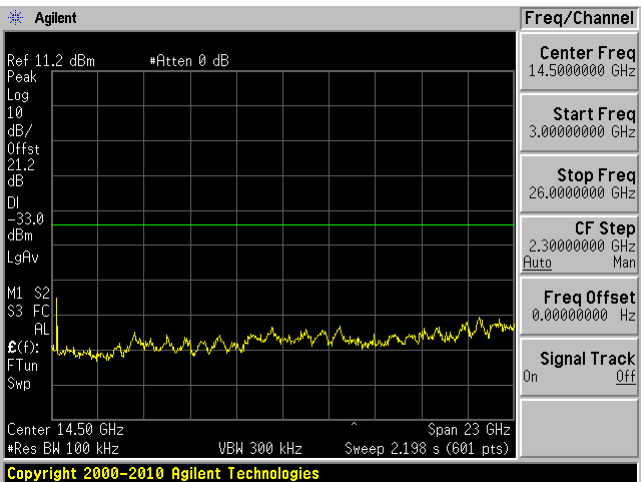


802.11n20 mode (Port B)


Low Channel 30 MHz – 3 GHz

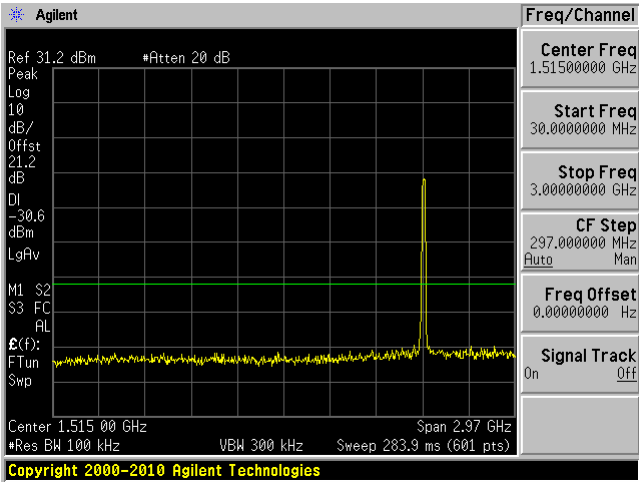


Low Channel 3 GHz – 26 GHz

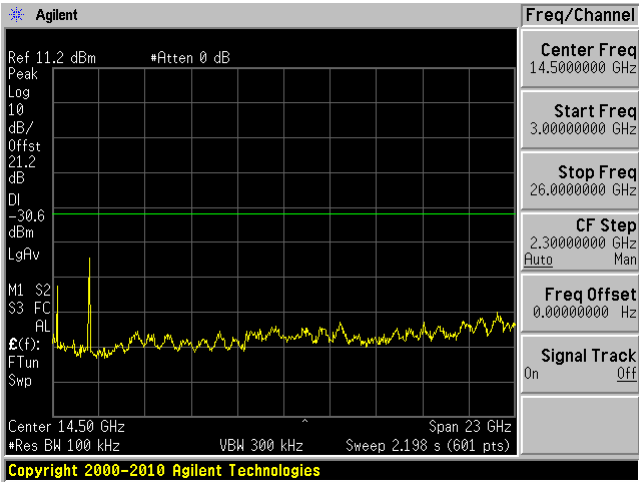


Middle Channel 30 MHz – 3 GHz

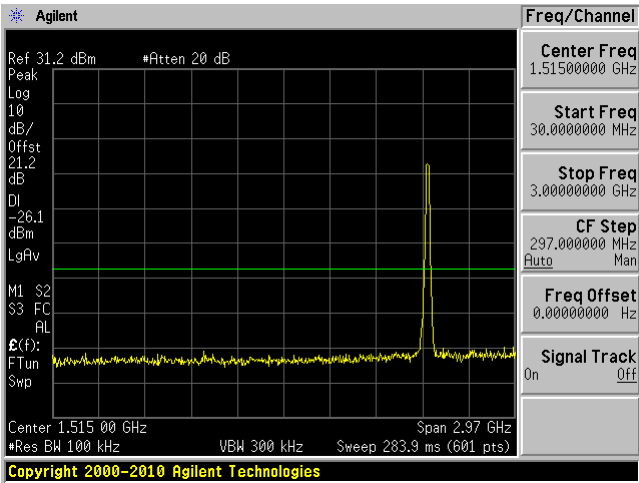


Middle Channel 3 GHz – 26 GHz

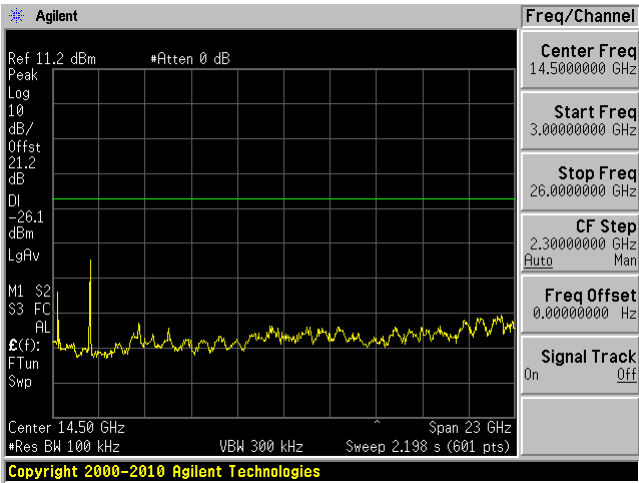

High Channel 30 MHz – 3 GHz

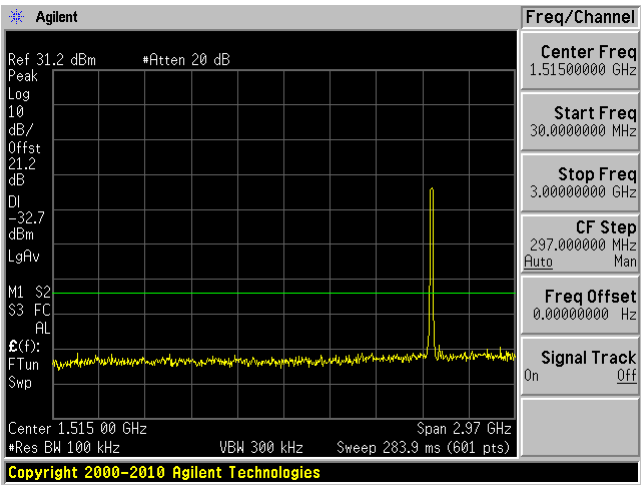


High Channel 3 GHz – 26 GHz

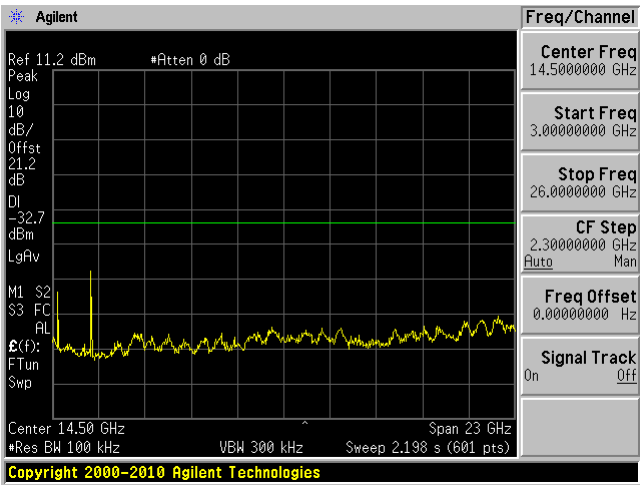


802.11n20 mode (Port B MIMO)


Low Channel 30 MHz – 3 GHz

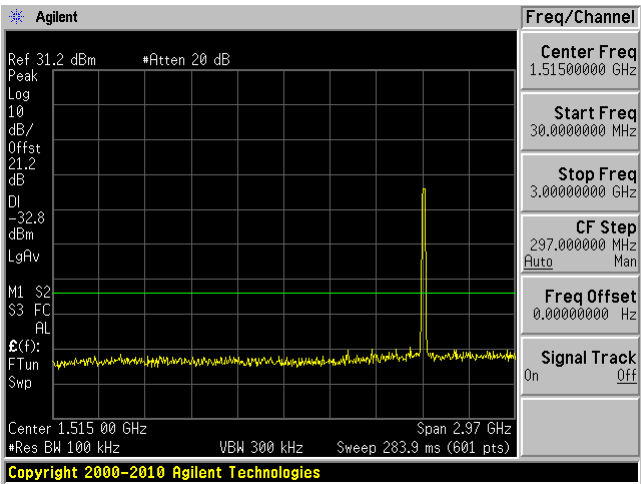


Low Channel 3 GHz – 26 GHz

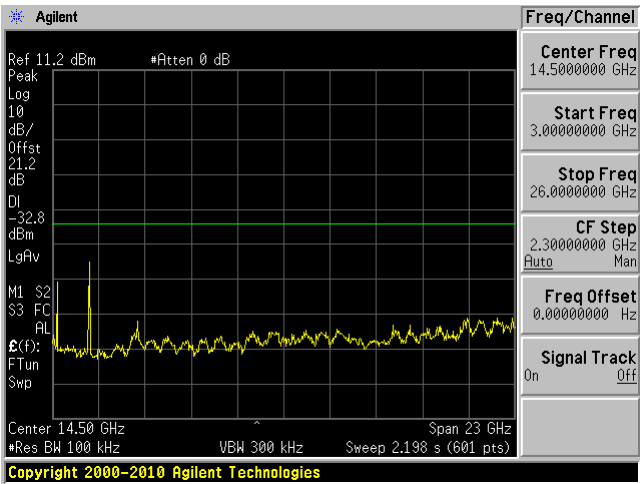


Middle Channel 30 MHz – 3 GHz

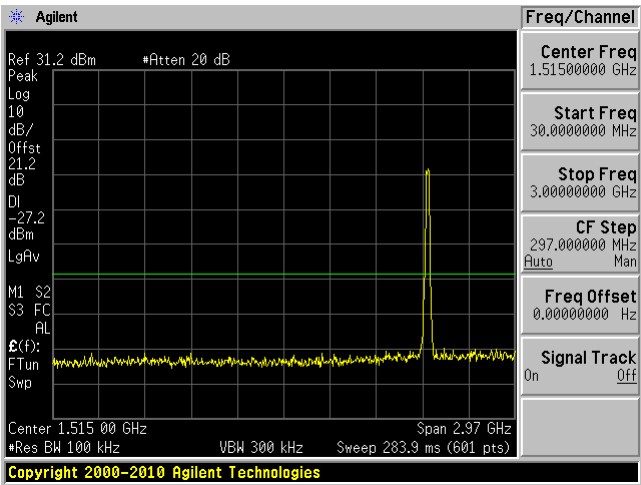


Middle Channel 3 GHz – 26 GHz

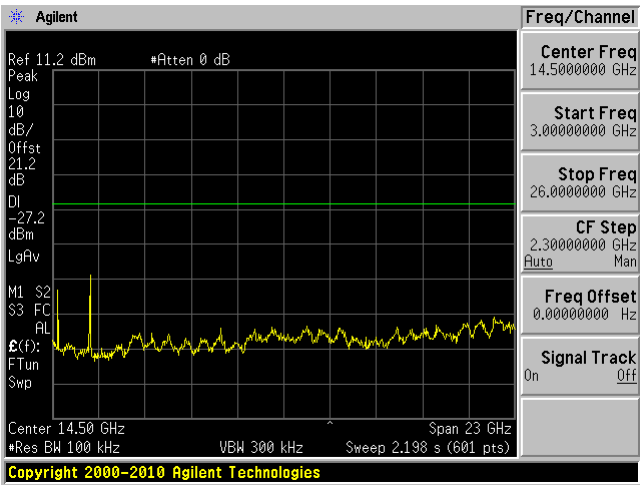

High Channel 30 MHz – 3 GHz

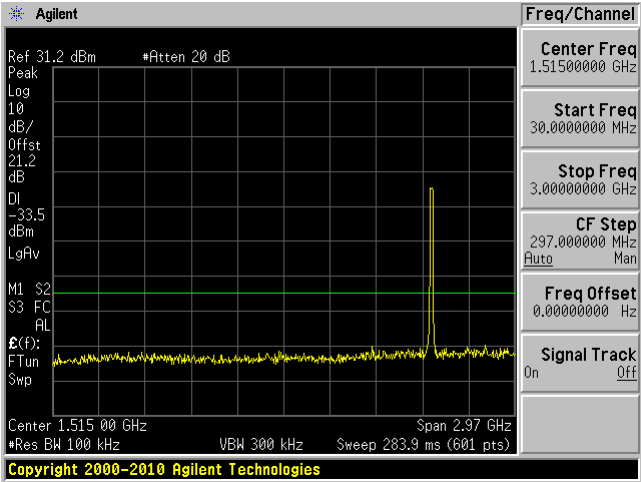

High Channel 3 GHz – 26 GHz

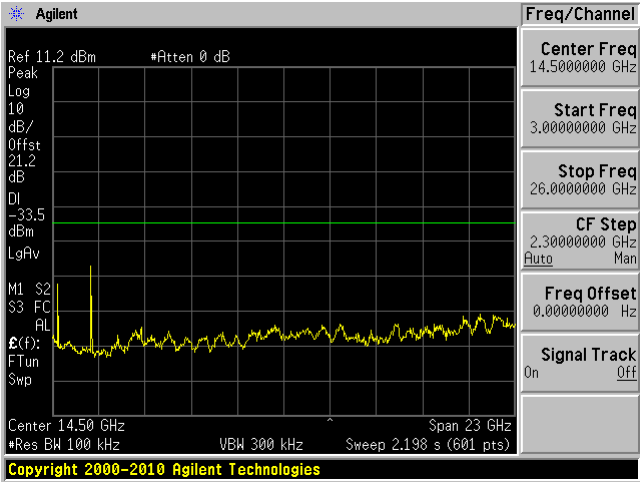

Note: Per client’s requirement, both SISO and MIMO mode for 802.11n were tested.

13 Exhibit A (Informative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of A2LA R222 - Specific Requirements - EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 30th day of August 2016.

Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2018

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.



--- END OF REPORT ---