


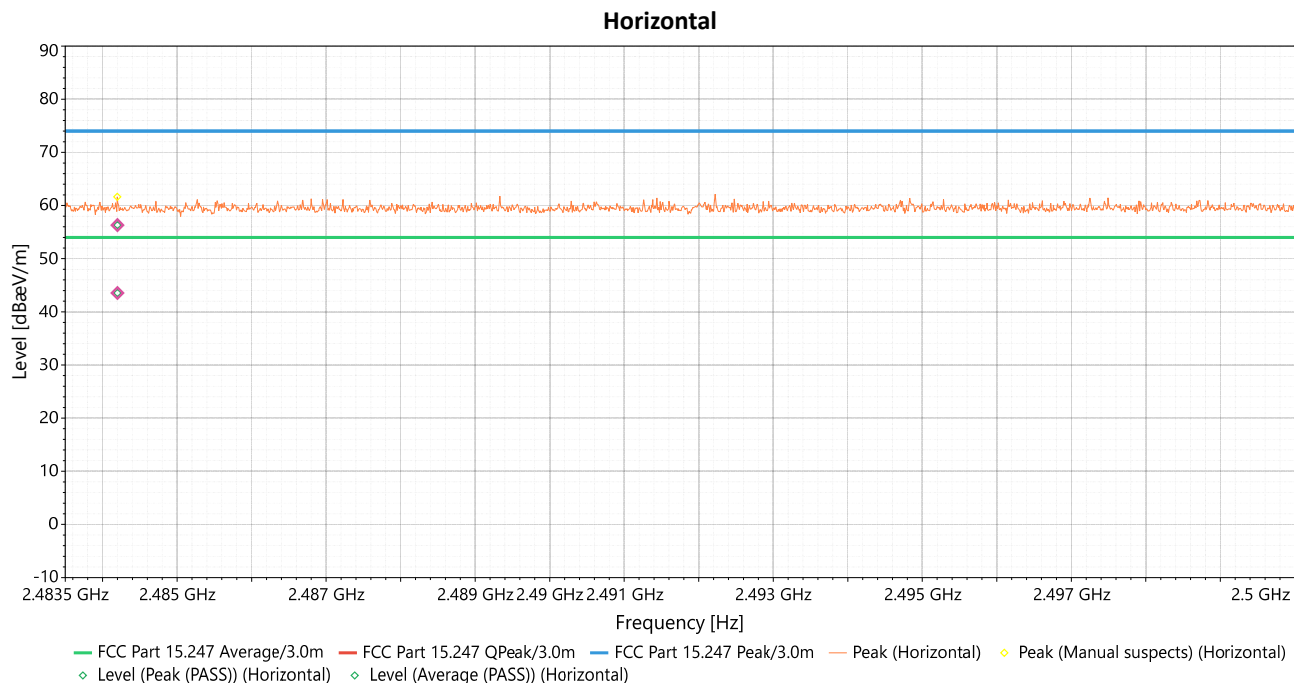



Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(μV/m)]	Limit Peak dB(μV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4981.4	Horizontal	46.503	74	-27.497	3.08	262	1.33	Peak (PASS)
2	4981.4	Horizontal	30.975	54	-23.025	3.08	262	1.33	Average (PASS)
3	2484.2	Horizontal	56.322	74	-17.678	3.46	34	36.33	Peak (PASS)
4	2484.2	Horizontal	43.545	54	-10.455	3.46	34	36.33	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE G 2412 MHz		

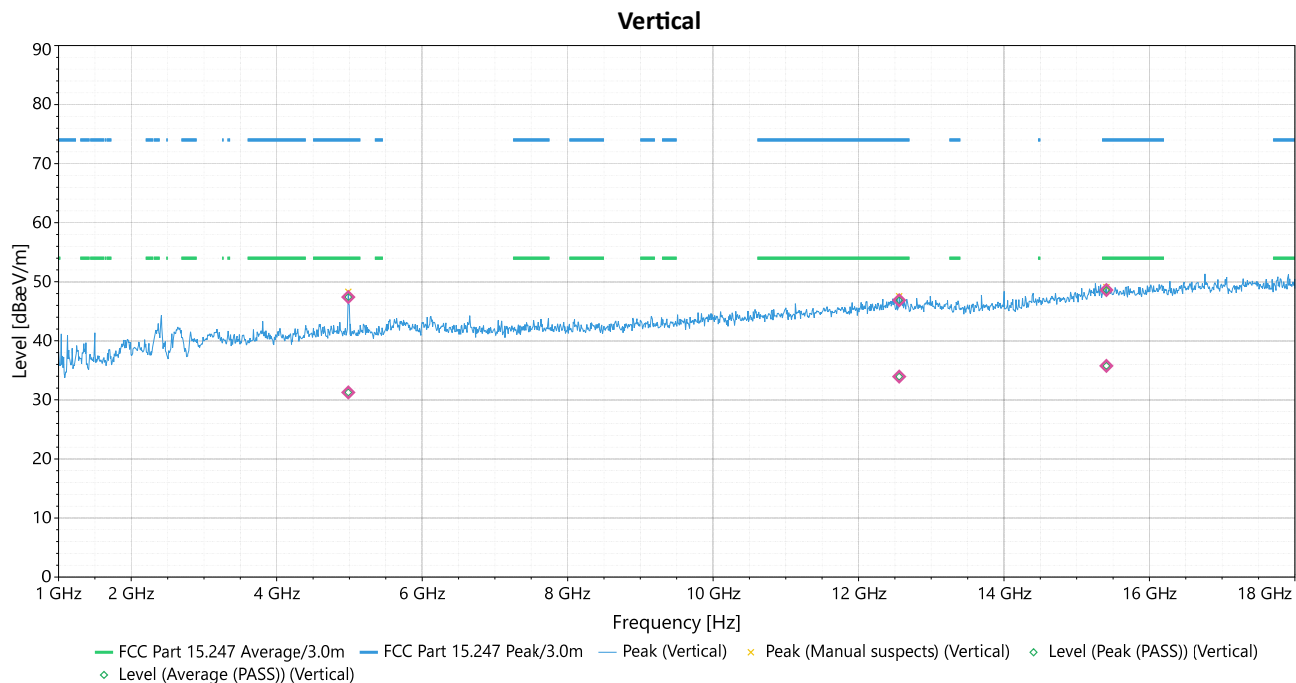

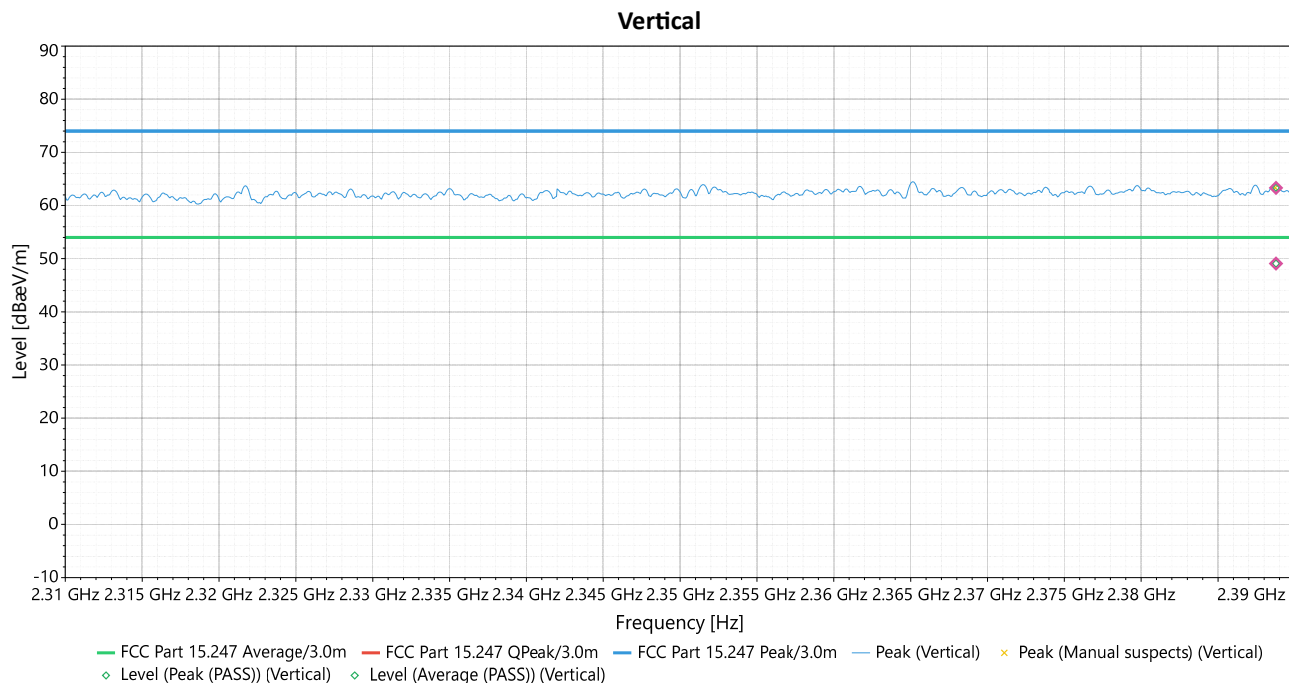



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4984.8	Vertical	47.4	74	-26.6	3.17	210	0.76	Peak (PASS)
2	4984.8	Vertical	31.268	54	-22.732	3.17	210	0.76	Average (PASS)
3	12560	Vertical	46.856	74	-27.144	3.15	276	3.82	Peak (PASS)
4	12560	Vertical	33.933	54	-20.067	3.15	276	3.82	Average (PASS)
5	15409	Vertical	48.59	74	-25.41	1	134	4.32	Peak (PASS)
6	15409	Vertical	35.746	54	-18.254	1	134	4.32	Average (PASS)
7	2388.776	Vertical	63.313	74	-10.687	2.89	144	35.82	Peak (PASS)
8	2388.776	Vertical	49.093	54	-4.907	2.89	144	35.82	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE G 2412 MHz		

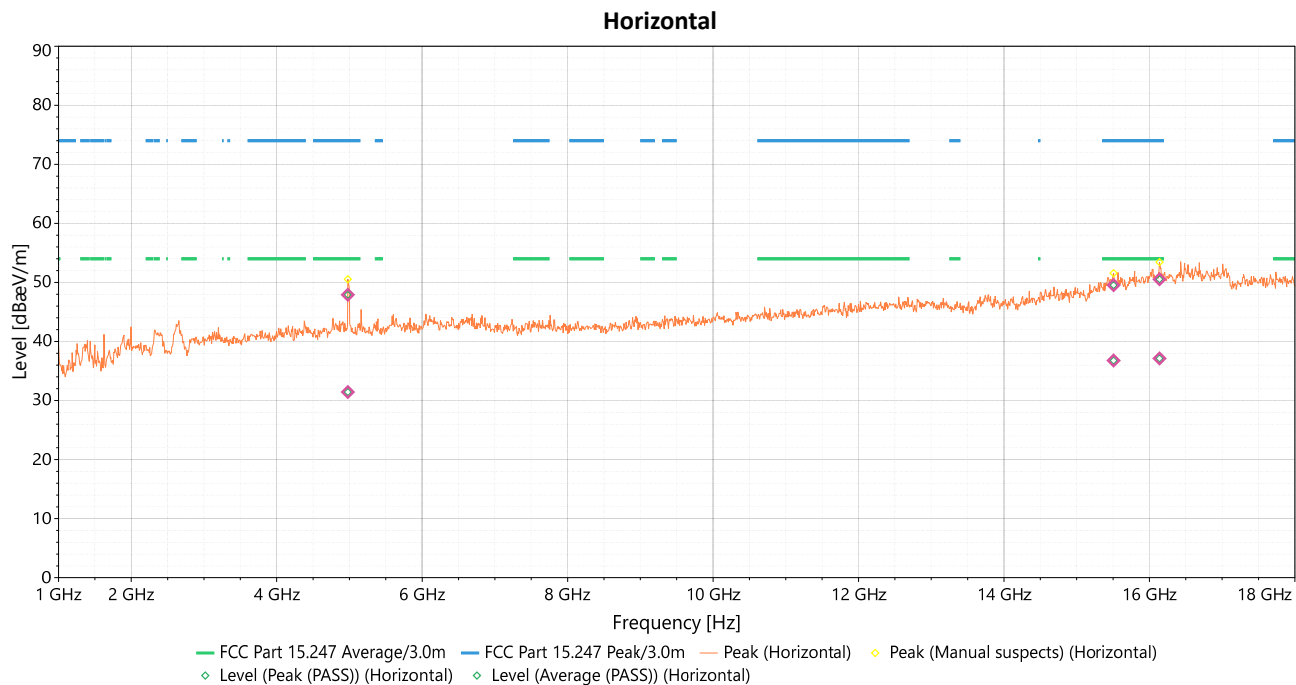

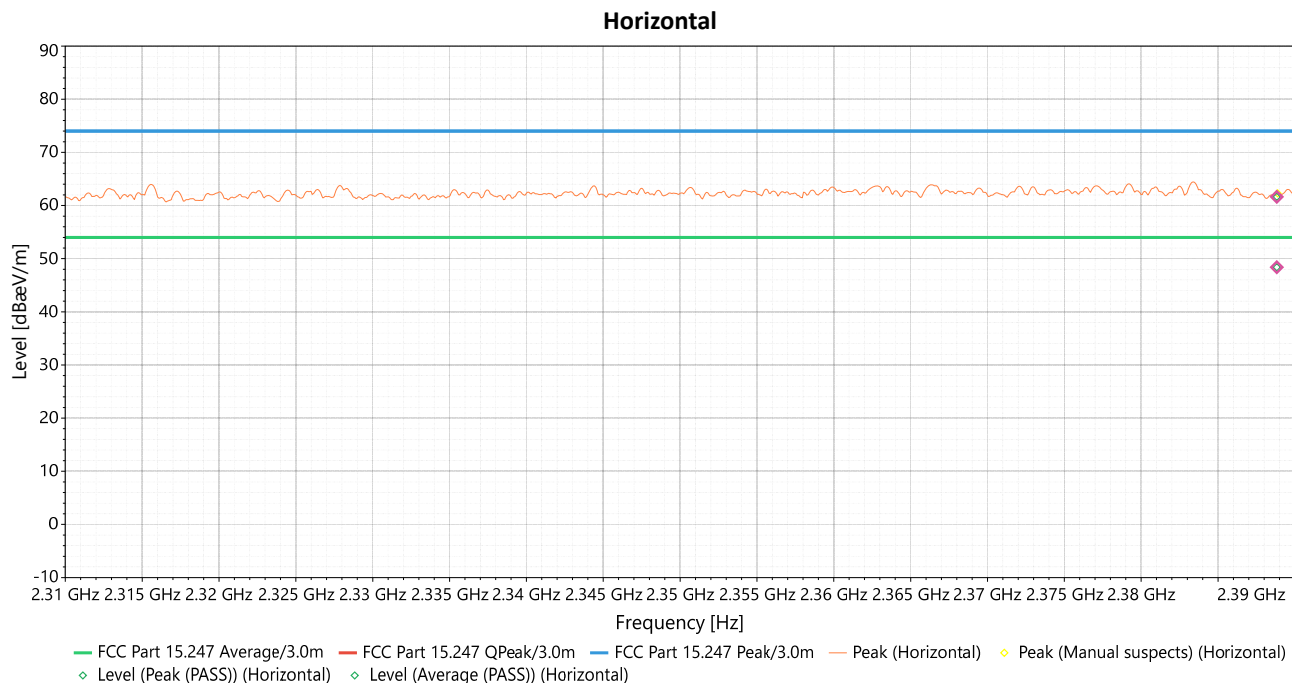


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4978	Horizontal	47.899	74	-26.101	3.19	358	1.33	Peak (PASS)
2	4978	Horizontal	31.455	54	-22.545	3.19	358	1.33	Average (PASS)
3	15508	Horizontal	49.527	74	-24.473	1.07	102	4.53	Peak (PASS)
4	15508	Horizontal	36.776	54	-17.224	1.07	102	4.53	Average (PASS)
5	16139	Horizontal	50.544	74	-23.456	2.63	352	4.93	Peak (PASS)
6	16139	Horizontal	37.124	54	-16.876	2.63	352	4.93	Average (PASS)
7	2388.826	Horizontal	61.635	74	-12.365	1.49	188	35.87	Peak (PASS)
8	2388.826	Horizontal	48.381	54	-5.619	1.49	188	35.87	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.


EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE 11 G 2437 MHz		

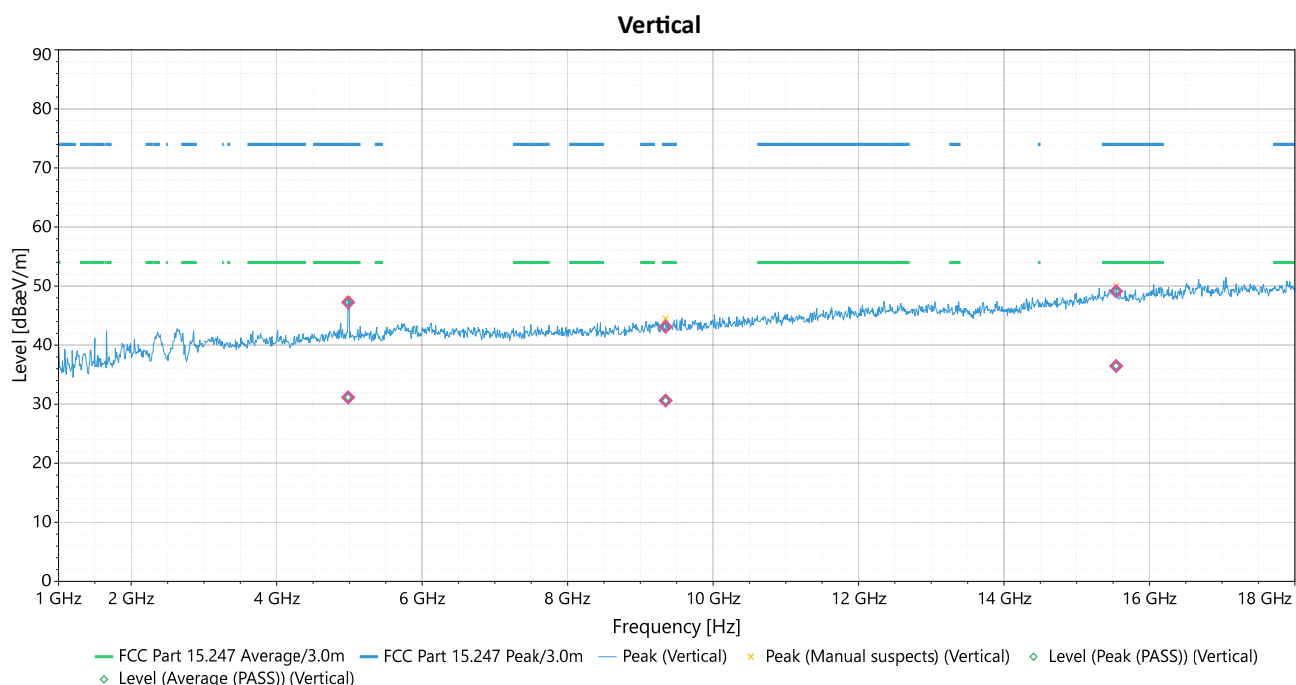

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4981.4	Vertical	47.237	74	-26.763	3.12	210	0.76	Peak (PASS)
2	4981.4	Vertical	31.155	54	-22.845	3.12	210	0.76	Average (PASS)
3	9347	Vertical	43.131	74	-30.869	3.04	348	2.11	Peak (PASS)
4	9347	Vertical	30.613	54	-23.387	3.04	348	2.11	Average (PASS)
5	15543	Vertical	49.12	74	-24.88	1.08	59	4.35	Peak (PASS)
6	15543	Vertical	36.457	54	-17.543	1.08	59	4.35	Average (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE 11G 2437 MHz		

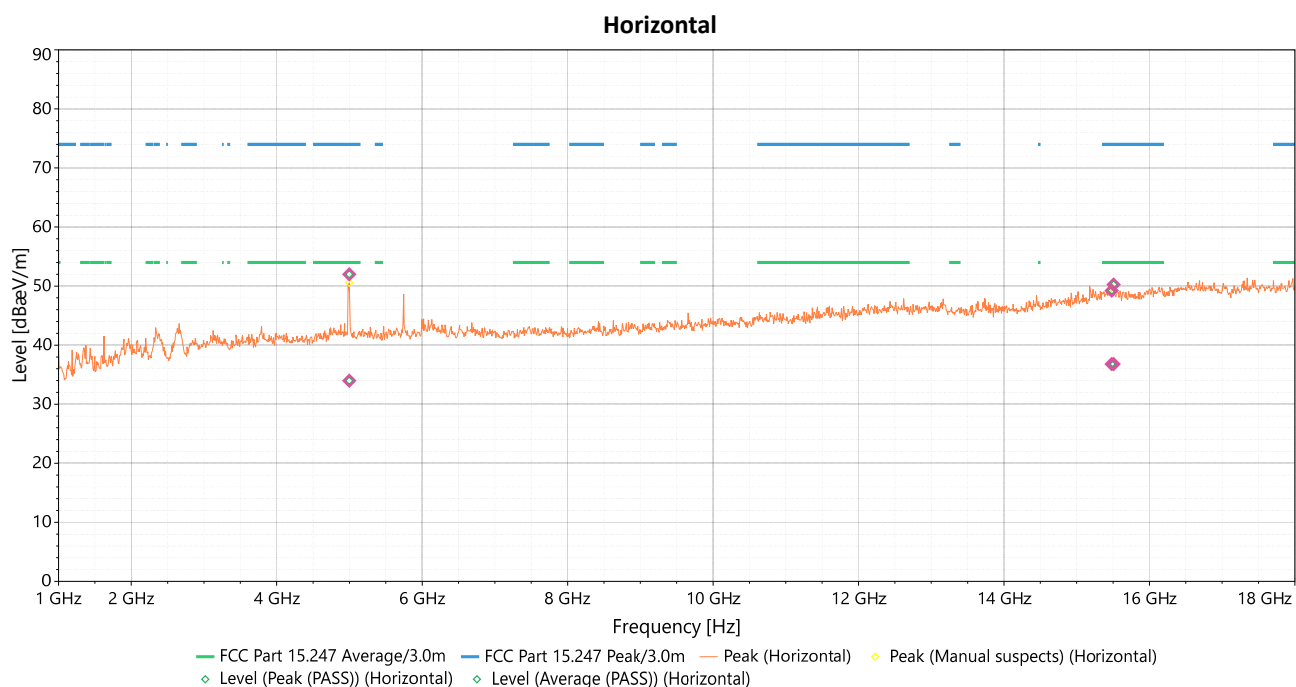



Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4998.4	Horizontal	52.003	74	-21.997	2.09	238	1.32	Peak (PASS)
2	4998.4	Horizontal	33.965	54	-20.035	2.09	238	1.32	Average (PASS)
3	15481	Horizontal	49.242	74	-24.758	1.75	94	4.55	Peak (PASS)
4	15481	Horizontal	36.787	54	-17.213	1.75	94	4.55	Average (PASS)
5	15508	Horizontal	50.273	74	-23.727	1.97	147	4.53	Peak (PASS)
6	15508	Horizontal	36.803	54	-17.197	1.97	147	4.53	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE 11G 2462 MHz		

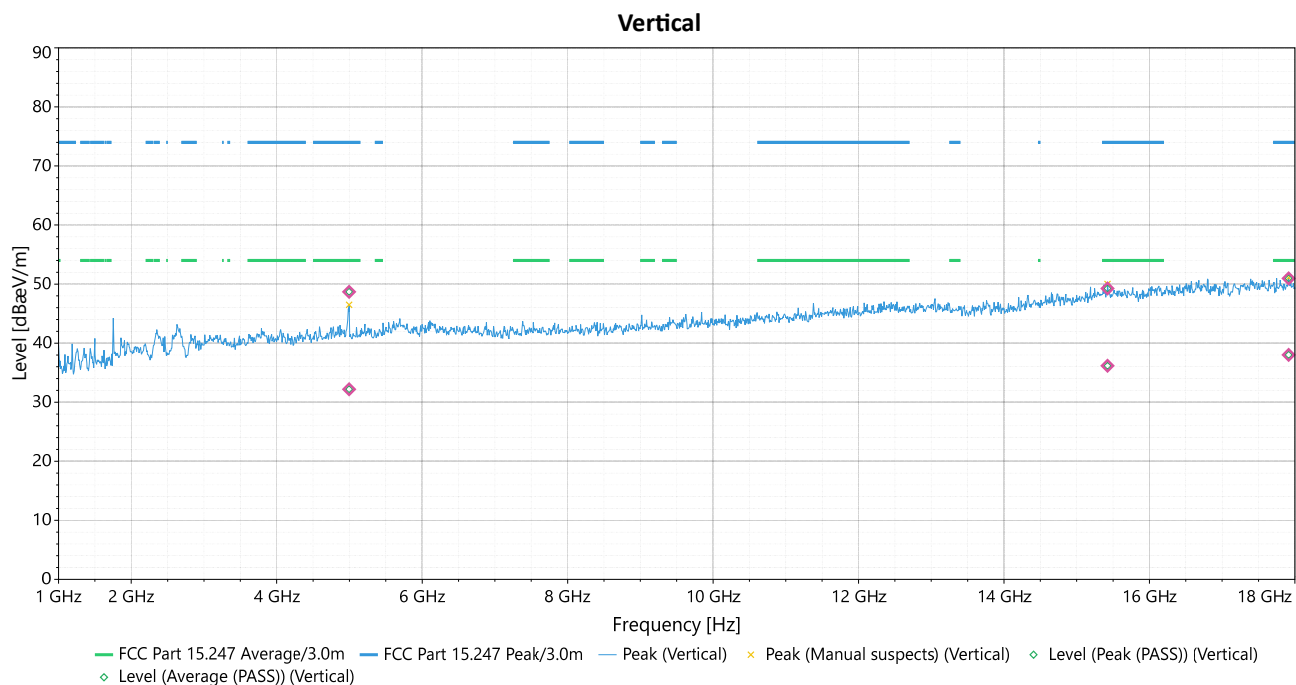


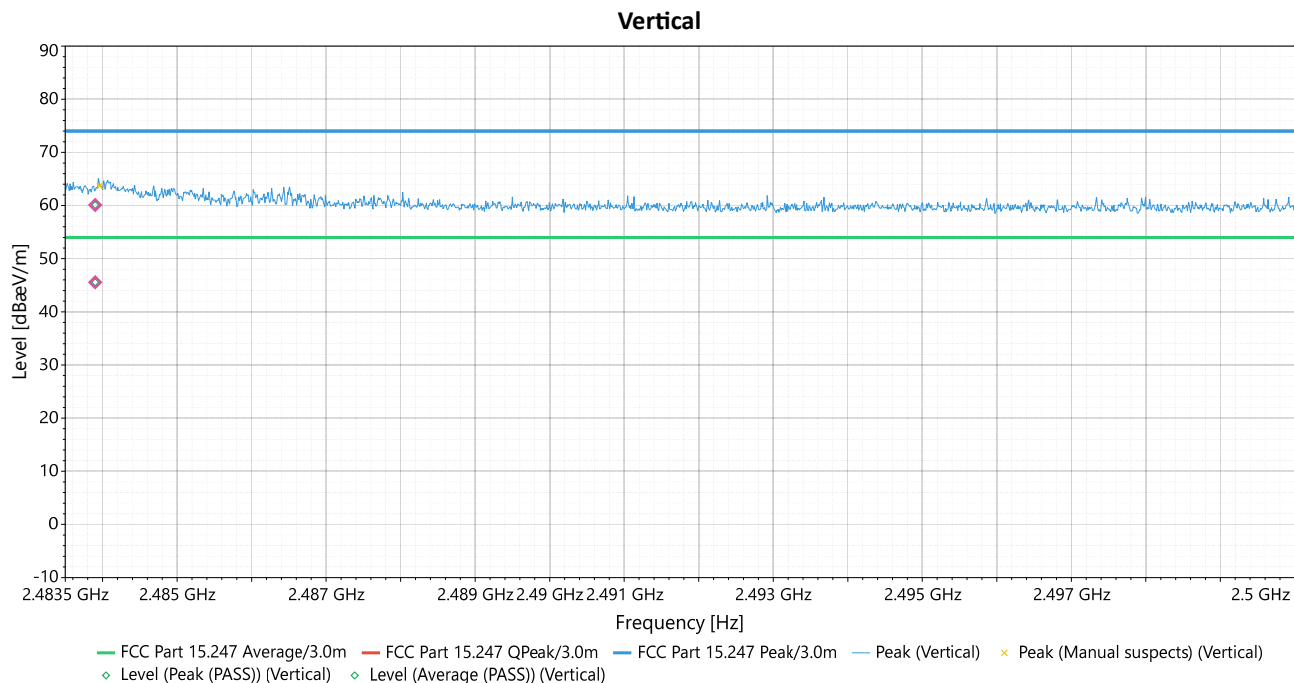


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4995	Vertical	48.704	74	-25.296	1.84	208	0.76	Peak (PASS)
2	4995	Vertical	32.196	54	-21.804	1.84	208	0.76	Average (PASS)
3	15424	Vertical	49.246	74	-24.754	2.42	208	4.33	Peak (PASS)
4	15424	Vertical	36.159	54	-17.841	2.42	208	4.33	Average (PASS)
5	17915	Vertical	50.957	74	-23.043	1.15	315	2.37	Peak (PASS)
6	17915	Vertical	38.008	54	-15.992	1.15	315	2.37	Average (PASS)
7	2483.9	Vertical	60.085	74	-13.915	1.03	66	36.21	Peak (PASS)
8	2483.9	Vertical	45.571	54	-8.429	1.03	66	36.21	Average (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE 11G 2462 MHz		

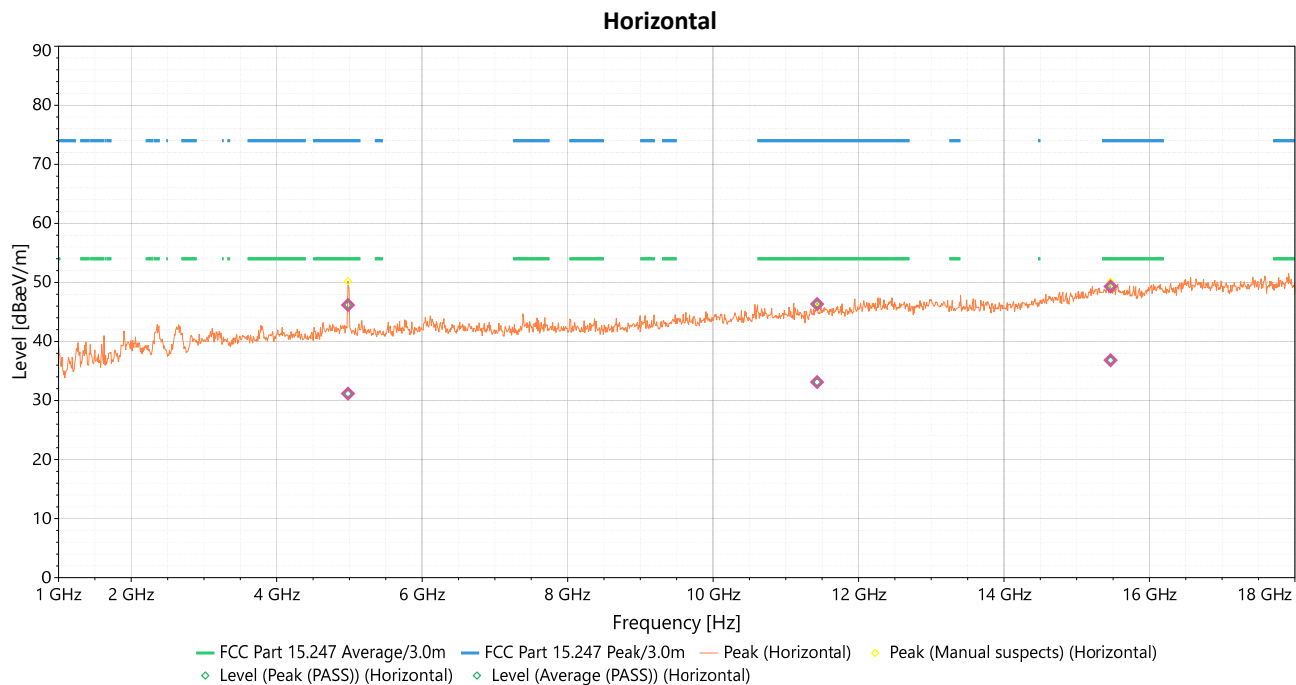

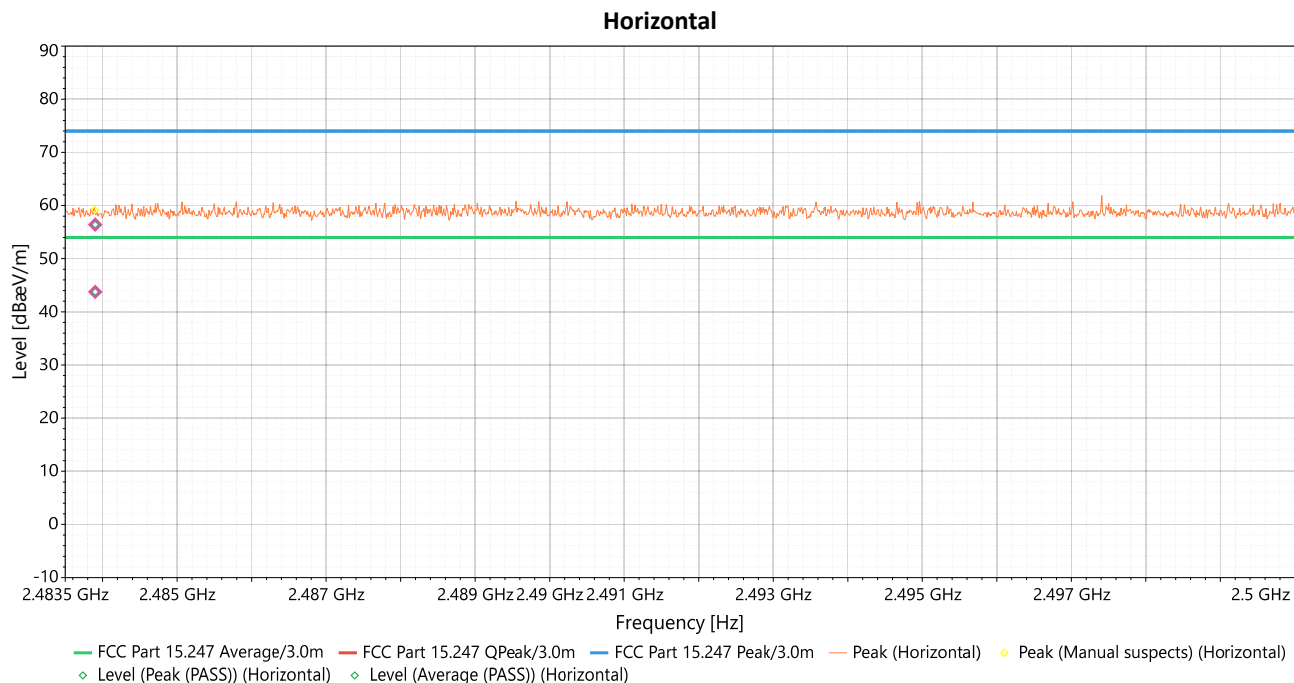

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(µV/m)]	Limit Peak dB(µV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	4979.7	Horizontal	46.193	74	-27.807	3.19	2	1.33	Peak (PASS)
2	4979.7	Horizontal	31.159	54	-22.841	3.19	2	1.33	Average (PASS)
3	11431	Horizontal	46.341	74	-27.659	1.83	128	3.28	Peak (PASS)
4	11431	Horizontal	33.124	54	-20.876	1.83	128	3.28	Average (PASS)
5	15465	Horizontal	49.311	74	-24.689	2.07	293	4.57	Peak (PASS)
6	15465	Horizontal	36.829	54	-17.171	2.07	293	4.57	Average (PASS)
7	2483.9	Horizontal	56.406	74	-17.594	1.88	202	36.32	Peak (PASS)
8	2483.9	Horizontal	43.762	54	-10.238	1.88	202	36.32	Average (PASS)

REMARKS:

1. Level (dBµV) = Reading (dBµV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3.8Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Alberto Saldivar
Test Mode	TX MODE N HT20 2412 MHz		

