

# SAR Test Report

*of*

*Product Name*

**802.11a+b+g Wireless CARDBUS ADAPTER**

*Model*

**PH52ABG**

*Applied by:*

PacketHop Inc.  
1301 Shoreway Road, Suite 200,  
Belmont, CA 94002  
U.S.A.

*Test Performed by:*

**International Standards Laboratory**

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.  
Lung-Tan Hsiang, Tao Yuan County 325  
Taiwan, R.O.C.  
Tel:(03)407-1718 Fax:(03)407-1738

**Report Number: 05LR025SAR-F-1**

**Issue Date: 2005/09/08**

**HC LAB:**NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178  
**LT LAB:**NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997  
ISL-T10-R31-1

## Contents of Report

|       |                                                               |    |
|-------|---------------------------------------------------------------|----|
| 1.    | General .....                                                 | 1  |
| 1.1   | Certification of Accuracy of Test Data .....                  | 1  |
|       | PacketHop Inc. ....                                           | 1  |
| 2.    | Description of Equipment Under Test (EUT) .....               | 2  |
| 2.1   | Test Environment .....                                        | 3  |
| 3.    | SAR Measurement System .....                                  | 4  |
| 3.1   | ALSAS-10U System Description .....                            | 4  |
| 3.1.1 | Applications .....                                            | 4  |
| 3.1.2 | Area Scans .....                                              | 4  |
| 3.1.3 | Zoom Scan (Cube Scan Averaging) .....                         | 5  |
| 3.1.4 | ALSAS-10U Interpolation and Extrapolation Uncertainty .....   | 5  |
| 3.2   | Isotropic E-Field Probe .....                                 | 5  |
| 3.2.1 | Isotropic E-Field Probe Specification .....                   | 7  |
| 3.3   | Boundary Detection Unit and Probe Mounting Device .....       | 7  |
| 3.4   | Daq-Paq (Analog to Digital Electronics) .....                 | 8  |
| 3.5   | Axis Articulated Robot .....                                  | 8  |
| 3.6   | ALSAS Universal Workstation .....                             | 9  |
| 3.7   | Universal Device Positioner .....                             | 9  |
| 3.8   | Phantom Types .....                                           | 9  |
| 3.8.1 | APREL Laboratories Universal Phantom .....                    | 10 |
| 4.    | Tissue Simulating Liquid .....                                | 11 |
| 4.1   | The composition of the tissue simulating liquid .....         | 11 |
| 4.2   | Tissue Calibration Result .....                               | 11 |
| 4.3   | Tissue Dielectric Parameters for Head and Body Phantoms ..... | 13 |
| 5.    | SAR Measurement Procedure .....                               | 14 |
| 5.1   | SAR System Validation .....                                   | 14 |
| 5.1.1 | Validation Dipoles .....                                      | 14 |
| 5.1.2 | Validation Result .....                                       | 14 |
| 5.2   | SAR Measurement Procedure .....                               | 16 |
| 6.    | SAR Exposure Limits .....                                     | 17 |
| 7.    | Test Equipment List .....                                     | 18 |
| 8.    | Measurement Uncertainty .....                                 | 19 |
| 9.    | Test Result Summary .....                                     | 20 |
| 9.1   | 802.11b Test Result .....                                     | 20 |
| 9.2   | 802.11g Test Result .....                                     | 20 |
| 9.3   | 802.11a (5150MHz ~5350MHz, Normal Mode) Test Result .....     | 21 |
| 9.4   | 802.11a (5150MHz ~5350MHz, Turbo Mode) Test Result .....      | 21 |
| 9.5   | 802.11a (5725MHz ~5825MHz, Normal Mode) Test Result .....     | 22 |
| 9.6   | 802.11a (5725MHz ~5825MHz, Turbo Mode) Test Result .....      | 22 |
| 10.   | SAR System Validation Data .....                              | 23 |
| 10.1  | 2450MHz System Validation Data .....                          | 23 |
| 10.2  | 5200 MHz System Validation Data .....                         | 27 |
| 10.3  | 5800 MHz System Validation Data .....                         | 30 |
| 11.   | 2450MHz SAR measurement Data .....                            | 33 |
| 11.1  | 802.11b, Right Antenna .....                                  | 34 |

|        |                                                                          |    |
|--------|--------------------------------------------------------------------------|----|
| 11.1.1 | 2412MHz, EUT Position: Bottom .....                                      | 34 |
| 11.1.2 | 2437MHz, EUT Position: Bottom .....                                      | 35 |
| 11.1.3 | 2462MHz, EUT Position: Bottom .....                                      | 36 |
| 11.1.4 | 2437MHz, EUT Position: Top.....                                          | 37 |
| 11.1.5 | 2437MHz, EUT Position: Front .....                                       | 38 |
| 11.2   | 802.11b, Left Antenna.....                                               | 39 |
| 11.2.1 | 2412MHz, EUT Position: Bottom .....                                      | 39 |
| 11.2.2 | 2437MHz, EUT Position: Bottom .....                                      | 40 |
| 11.2.3 | 2462MHz, EUT Position: Bottom .....                                      | 41 |
| 11.2.4 | 2437MHz, EUT Position: Top.....                                          | 42 |
| 11.2.5 | 2437MHz, EUT Position: Front .....                                       | 43 |
| 11.3   | 802.11g, Right Antenna .....                                             | 44 |
| 11.3.1 | 2412MHz, EUT Position: Bottom .....                                      | 44 |
| 11.3.2 | 2437MHz, EUT Position: Bottom .....                                      | 45 |
| 11.3.3 | 2462MHz, EUT Position: Bottom .....                                      | 46 |
| 11.3.4 | 2437MHz, EUT Position: Top.....                                          | 47 |
| 11.3.5 | 2437MHz, EUT Position: Front .....                                       | 48 |
| 11.4   | 802.11g, Left Antenna.....                                               | 49 |
| 11.4.1 | 2412MHz, EUT Position: Bottom .....                                      | 49 |
| 11.4.2 | 2437MHz, EUT Position: Bottom .....                                      | 50 |
| 11.4.3 | 2462MHz, EUT Position: Bottom .....                                      | 51 |
| 11.4.4 | 2437MHz, EUT Position: Top.....                                          | 52 |
| 11.4.5 | 2437MHz, EUT Position: Front .....                                       | 53 |
| 11.5   | 2450MHz Z-Axis plot.....                                                 | 54 |
| 11.5.1 | Frequency: 802.11b 2412MHz, EUT Bottom (Right Antenna) .....             | 54 |
| 11.5.2 | Frequency: 802.11g 2412MHz, EUT Bottom (Right Antenna) .....             | 55 |
| 12.    | 5200 MHz SAR measurement Data .....                                      | 56 |
| 12.1   | 802.11a (5150MHz ~5350MHz, Normal Mode), Right Antenna.....              | 57 |
| 12.1.1 | 5180 MHz, EUT Position: Bottom .....                                     | 57 |
| 12.1.2 | 5240 MHz, EUT Position: Bottom .....                                     | 58 |
| 12.1.3 | 5260 MHz, EUT Position: Bottom .....                                     | 59 |
| 12.1.4 | 5320 MHz, EUT Position: Bottom .....                                     | 60 |
| 12.1.5 | 5260 MHz, EUT Position: Top.....                                         | 61 |
| 12.1.6 | 5260 MHz, EUT Position: Front .....                                      | 62 |
| 12.2   | 802.11a (5150MHz ~5350MHz, Normal Mode), Left Antenna.....               | 63 |
| 12.2.1 | 5180 MHz, EUT Position: Bottom .....                                     | 63 |
| 12.2.2 | 5240 MHz, EUT Position: Bottom .....                                     | 64 |
| 12.2.3 | 5260 MHz, EUT Position: Bottom .....                                     | 65 |
| 12.2.4 | 5320 MHz, EUT Position: Bottom .....                                     | 66 |
| 12.2.5 | 5260 MHz, EUT Position: Top.....                                         | 67 |
| 12.2.6 | 5260 MHz, EUT Position: Front .....                                      | 68 |
| 12.3   | 802.11a (5150MHz ~5350MHz, Turbo Mode), Right Antenna .....              | 69 |
| 12.3.1 | 5210 MHz, EUT Position: Bottom .....                                     | 69 |
| 12.3.2 | 5250 MHz, EUT Position: Bottom .....                                     | 70 |
| 12.3.3 | 5290 MHz, EUT Position: Bottom .....                                     | 71 |
| 12.3.4 | 5250 MHz, EUT Position: Top.....                                         | 72 |
| 12.3.5 | 5250 MHz, EUT Position: Front .....                                      | 73 |
| 12.4   | 802.11a (5150MHz ~5350MHz, Turbo Mode), Left Antenna .....               | 74 |
| 12.4.1 | 5210 MHz, EUT Position: Bottom .....                                     | 74 |
| 12.4.2 | 5250 MHz, EUT Position: Bottom .....                                     | 75 |
| 12.4.3 | 5290 MHz, EUT Position: Bottom .....                                     | 76 |
| 12.4.4 | 5250 MHz, EUT Position: Top.....                                         | 77 |
| 12.4.5 | 5250 MHz, EUT Position: Front .....                                      | 78 |
| 12.5   | 5200MHz Z-Axis plot.....                                                 | 79 |
| 12.5.1 | Frequency: 802.11a 5180MHz Normal Mode, EUT Bottom (Right Antenna) ..... | 79 |
| 12.5.2 | Frequency: 802.11a 5210MHz Turbo Mode, EUT Bottom (Right Antenna).....   | 80 |
| 13.    | 5800 MHz SAR measurement Data .....                                      | 81 |

|        |                                                                           |     |
|--------|---------------------------------------------------------------------------|-----|
| 13.1   | 802.11a (5725MHz ~5825MHz, Normal Mode), Right Antenna.....               | 82  |
| 13.1.1 | 5745 MHz, EUT Position: Bottom .....                                      | 82  |
| 13.1.2 | 5765 MHz, EUT Position: Bottom .....                                      | 83  |
| 13.1.3 | 5805 MHz, EUT Position: Bottom .....                                      | 84  |
| 13.1.4 | 5765 MHz, EUT Position: Top.....                                          | 85  |
| 13.1.5 | 5765 MHz, EUT Position: Front .....                                       | 86  |
| 13.2   | 802.11a (5725MHz ~5825MHz, Normal Mode), Left Antenna .....               | 87  |
| 13.2.1 | 5745 MHz, EUT Position: Bottom .....                                      | 87  |
| 13.2.2 | 5765 MHz, EUT Position: Bottom .....                                      | 88  |
| 13.2.3 | 5805 MHz, EUT Position: Bottom .....                                      | 89  |
| 13.2.4 | 5765 MHz, EUT Position: Top.....                                          | 90  |
| 13.2.5 | 5765 MHz, EUT Position: Front .....                                       | 91  |
| 13.3   | 802.11a (5725MHz ~5825MHz, Turbo Mode), Right Antenna .....               | 92  |
| 13.3.1 | 5760 MHz, EUT Position: Bottom .....                                      | 92  |
| 13.3.2 | 5800 MHz, EUT Position: Bottom .....                                      | 93  |
| 13.3.3 | 5760 MHz, EUT Position: Top.....                                          | 94  |
| 13.3.4 | 5760 MHz, EUT Position: Front .....                                       | 95  |
| 13.4   | 802.11a (5725MHz ~5825MHz, Turbo Mode), Left Antenna .....                | 96  |
| 13.4.1 | 5760 MHz, EUT Position: Bottom .....                                      | 96  |
| 13.4.2 | 5800 MHz, EUT Position: Bottom .....                                      | 97  |
| 13.4.3 | 5760 MHz, EUT Position: Top.....                                          | 98  |
| 13.4.4 | 5760 MHz, EUT Position: Front .....                                       | 99  |
| 13.5   | 5800MHz Z-Axis plot .....                                                 | 100 |
| 13.5.1 | Frequency: 802.11a 5765 MHz Normal Mode, EUT Bottom (Right Antenna) ..... | 100 |
| 13.5.2 | Frequency: 802.11a 5760MHz Turbo Mode, EUT Bottom (Right Antenna).....    | 101 |
| 14.    | Test Setup Photographs .....                                              | 102 |
| 14.1   | Test Position : EUT Bottom (Right Antenna and Left Antenna).....          | 102 |
| 14.2   | Test Position : EUT Top (Right Antenna and Left Antenna) .....            | 102 |
| 15.    | EUT Photograph.....                                                       | 104 |
| 16.    | Appendix:Probe and Validation Dipole calibration.....                     | 108 |
| 16.1   | Probe: Refer to Probe_Cal.Pdf attached.....                               | 108 |
| 16.2   | Dipole: Refer to Dipole_Cal.pdf attached.....                             | 108 |

## 1. General

### 1.1 Certification of Accuracy of Test Data

|                              |                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------|
| <b>Standards:</b>            | FCC OET65 Supplement C June 2001                                                    |
| <b>Equipment Tested:</b>     | 802.11a+b+g WIRELESS CARDBUS ADAPTER                                                |
| <b>Model:</b>                | PH52ABG                                                                             |
| <b>Applied by:</b>           | <b>PacketHop Inc.</b>                                                               |
| <b>Sample received Date:</b> | 2005/08/26                                                                          |
| <b>Final test Date :</b>     | 2005/08/29 ~ 2005/09/02                                                             |
| <b>Test Site:</b>            | SAR test site                                                                       |
|                              | Maximum SAR Measurement (1g)                                                        |
|                              | 802.11b: 0.769 W/kg                                                                 |
|                              | 802.11g: 0.489W/kg                                                                  |
| <b>Test Result</b>           | 802.11a: 0.752 W/kg)                                                                |
| <b>Temperature</b>           | 21.9 ~ 22.8                                                                         |
| <b>Humidity:</b>             | 51% ~ 58%                                                                           |
| <b>Test Engineer:</b>        |  |


David CS Chiu

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent test lab, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test.

The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

  
-----  
Eddy Hsiung/Director

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 111 pages, including 1 cover page, 3 contents page, and 108 pages for the test description. This report must not be use to claim product endorsement by NVLAP, NIST, any agency of the federal government.</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 2. Description of Equipment Under Test (EUT)

|                               |                                                                                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------|
| Product Name                  | 802.11a+b+g WIRELESS CARDBUS ADAPTER                                                                          |
| Model No.                     | PH52ABG                                                                                                       |
| FCC ID:                       | TCB-PH52ABG                                                                                                   |
| TX Frequency                  | 2412 MHz ~ 2462 MHz<br>5150 MHz ~ 5350 MHz<br>5725 MHz ~ 5825MHz                                              |
| Number of Channel             | 802.11b: 11<br>802.11g: 11<br>802.11a: 12 (Normal Mode)<br>802.11a: 5 (Turbo Mode)                            |
| Type of Modulation            | 802.11b: DSSS<br>802.11g and 802.11a: OFDM                                                                    |
| Max. Output Power (Conducted) | 802.11b: 17.71 dBm<br>802.11g: 16.69 dBm<br>802.11a: 15.73dBm (Normal Mode)<br>802.11a: 15.39dBm (Turbo Mode) |
| Antenna Peak Gain             | Right Antenna:<br>2.4GHz : 1.5dBi, 5GHz: 1.06dBi<br>Left Antenna:<br>2.45GHz: -2.9dBi, 5GHz: 0.65dBi,         |
| Antenna Type                  | Internal, Dual Band Printed IFA                                                                               |
| Transfer Rate                 | 802.11b: 1~11Mbps<br>802.11g: 6~54Mbps<br>802.11a: 6~54Mbps (normal mode)<br>802.11a: 12~108Mbps (Turbo mode) |
| Power Type                    | 5V DC from Notebook PC                                                                                        |
| Device Category               | Portable                                                                                                      |
| RF Exposure Environment       | Uncontrolled                                                                                                  |

## 2.1 Test Environment

Ambient conditions in the laboratory:

| Items            | Required | Actual                                                  |
|------------------|----------|---------------------------------------------------------|
| Temperature (°C) | 18 ~ 25  | 22.3 (8/29/2005)<br>22.8 (8/30/2005)<br>21.9 (9/2/2005) |
| Humidity (%RH)   | 30 ~ 70  | 53 (8/29/2005)<br>58 (8/30/2005)<br>51 (9/2/2005)       |

### 3. SAR Measurement System

#### 3.1 *ALSAS-10U System Description*

**ALSAS-10-U** is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies and FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

##### 3.1.1 Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

##### 3.1.2 Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.



### 3.1.3 Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

### 3.1.4 ALSAS-10U Interpolation and Extrapolation Uncertainty

The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:


$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left( e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

## 3.2 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

| Calibration Frequency | Air Calibration | Tissue Calibration |
|-----------------------|-----------------|--------------------|
| 2450MHz               | Waveguide       | Temperature        |
| 5200MHz               | Waveguide       | Temperature        |
| 5800MHz               | Waveguide       | Temperature        |

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

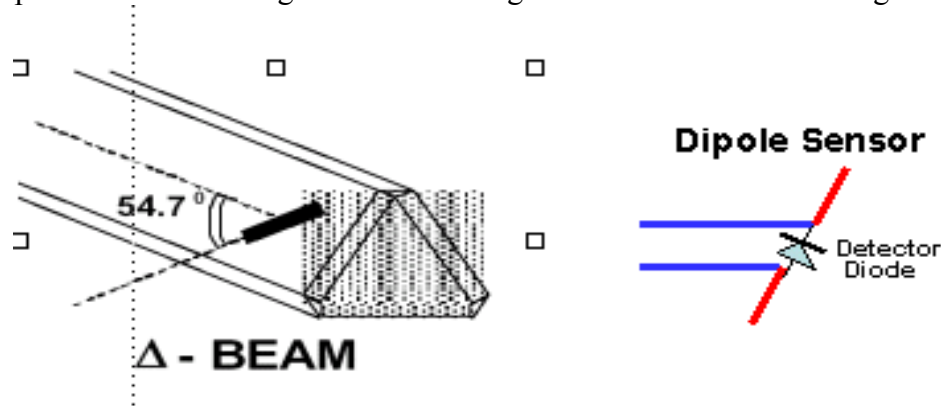

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

### 3.2.1 Isotropic E-Field Probe Specification

|                               |                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Calibration in Air            | Frequency Dependent<br>Below 2GHz Calibration in air performed in a TEM Cell<br>Above 2GHz Calibration in air performed in waveguide |
| Sensitivity                   | $0.70 \mu\text{V}/(\text{V/m})^2$ to $0.85 \mu\text{V}/(\text{V/m})^2$                                                               |
| Dynamic Range                 | 0.0005 W/kg to 100W/kg                                                                                                               |
| Isotropic Response            | Better than 0.2dB                                                                                                                    |
| Diode Compression point (DCP) | Calibration for Specific Frequency                                                                                                   |
| Probe Tip Radius              | < 5mm                                                                                                                                |
| Sensor Offset                 | 1.56 (+/- 0.02mm)                                                                                                                    |
| Probe Length                  | 290mm                                                                                                                                |
| Video Bandwidth               | @ 500 Hz: 1dB<br>@1.02 KHz: 3dB                                                                                                      |
| Boundary Effect               | Less than 2% for distance greater than 2.4mm                                                                                         |
| Spatial Resolution            | Diameter less than 5mm Compliant with Standards                                                                                      |

### 3.3 Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq

### 3.4 Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 $\mu$ V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| ADC                      | 12 Bit                                                          |
| Amplifier Range          | 20mV to 200mV and 150mV to 800mV                                |
| Field Integration        | Local Co-Processor utilizing proprietary integration algorithms |
| Number of Input Channels | 4 in total 3 dedicated and 1 spare                              |
| Communication            | Packet data via RS232                                           |

### 3.5 Axis Articulated Robot



ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.

|                               |                                   |
|-------------------------------|-----------------------------------|
| Robot/Controller Manufacturer | Thermo CRS                        |
| Number of Axis                | Six independently controlled axis |
| Positioning Repeatability     | 0.05mm                            |
| Controller Type               | Single phase Pentium based C500C  |
| Robot Reach                   | 710mm                             |
| Communication                 | RS232 and LAN compatible          |

### 3.6 ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

### 3.7 Universal Device Positioner

The universal device positioner allow complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.


### 3.8 Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.



#### APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

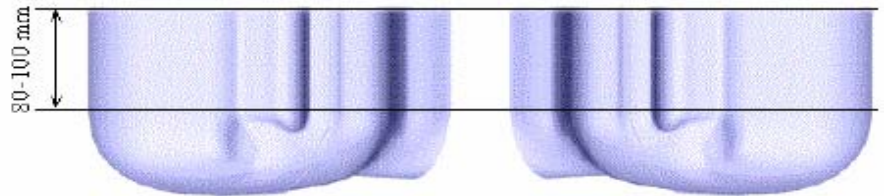

#### 3.8.1 APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528. The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



## 4. Tissue Simulating Liquid

### 4.1 The composition of the tissue simulating liquid

| INGREDIENT<br>(% Weight) | 2450MHz<br>Head | 2450MHz<br>Body | 5800MHz<br>-Head | 5800MHz<br>-Body |
|--------------------------|-----------------|-----------------|------------------|------------------|
| <b>Water</b>             | 46.7            | 73.2            | -                | -                |
| <b>Salt</b>              | 0.00            | 0.04            | -                | -                |
| <b>Sugar</b>             | 0.00            | 0.00            | -                | -                |
| <b>HEC</b>               | 0.00            | 0.00            | -                | -                |
| <b>Preventol</b>         | 0.00            | 0.00            | -                | -                |
| <b>DGBE</b>              | 53.3            | 26.7            | -                | -                |

### 4.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using Agilent Dielectric Probe Kit and Agilent E5071B Vector Network Analyzer

| Head Tissue Simulant Measurement |                                 |                        |                     |                      |
|----------------------------------|---------------------------------|------------------------|---------------------|----------------------|
| Frequency<br>[MHz]               | Description                     | Dielectric Parameters  |                     | Tissue Temp.<br>[°C] |
|                                  |                                 | $\epsilon_r$           | $\sigma$ [s/m]      |                      |
| 2450MHz                          | Reference result<br>± 5% window | 39.2<br>37.24 to 41.16 | 1.8<br>1.71 to 1.89 | N/A                  |
|                                  | 29-Aug-2005                     | 38.7                   | 1.85                | 21.4                 |

| Body Tissue Simulant Measurement |                                  |                          |                          |                      |
|----------------------------------|----------------------------------|--------------------------|--------------------------|----------------------|
| Frequency<br>[MHz]               | Description/ Calibration<br>date | Dielectric Parameters    |                          | Tissue Temp.<br>[°C] |
|                                  |                                  | $\epsilon_r$             | $\sigma$ [s/m]           |                      |
| 2450MHz                          | Reference result<br>± 5% window  | 52.7<br>50.065 to 55.335 | 1.95<br>1.8525 to 2.0475 | N/A                  |
|                                  | 29-Aug-2005                      | 53.8                     | 1.91                     | 21.4                 |
| 2412 MHz                         | Low channel                      | 54.6                     | 1.87                     | 21.4                 |
| 2437 MHz                         | Mid channel                      | 54.1                     | 1.89                     | 21.4                 |
| 2462 MHz                         | High channel                     | 53.4                     | 1.96                     | 21.4                 |

5GHz Tissue Simulant Measurement

| Head Tissue Simulant Measurement ( Aug. 30, 2005) for 5200MHz SAR |                                  |                |                |                   |                |                      |
|-------------------------------------------------------------------|----------------------------------|----------------|----------------|-------------------|----------------|----------------------|
| Frequency<br>[MHz]                                                | Description/<br>Calibration date | Standard Value |                | Measurement Value |                | Tissue Temp.<br>[°C] |
|                                                                   |                                  | $\epsilon_r$   | $\sigma$ [s/m] | $\epsilon_r$      | $\sigma$ [s/m] |                      |
| 5200MHz                                                           | 08/30/2005                       | -              | -              | 37.85             | 4.892          | 21.9                 |
| 5800MHz                                                           | 08/30/2005                       | 35.3           | 5.27           | 36.98             | 5.477          | 21.1                 |

| Head Tissue Simulant Measurement ( Sep. 2, 2005) for 5800MHz SAR |                                  |                |                |                   |                |                      |
|------------------------------------------------------------------|----------------------------------|----------------|----------------|-------------------|----------------|----------------------|
| Frequency<br>[MHz]                                               | Description/<br>Calibration date | Standard Value |                | Measurement Value |                | Tissue Temp.<br>[°C] |
|                                                                  |                                  | $\epsilon_r$   | $\sigma$ [s/m] | $\epsilon_r$      | $\sigma$ [s/m] |                      |
| 5800MHz                                                          | 09/02/2005                       | 35.3           | 5.27           | 36.90             | 5.491          | 21.1                 |

| Body Tissue Simulant Measurement ( Aug. 30, 2005) for 5200MHz SAR |             |                |                |                   |                |                      |
|-------------------------------------------------------------------|-------------|----------------|----------------|-------------------|----------------|----------------------|
| Frequency<br>[MHz]                                                | Description | Standard Value |                | Measurement Value |                | Tissue Temp.<br>[°C] |
|                                                                   |             | $\epsilon_r$   | $\sigma$ [s/m] | $\epsilon_r$      | $\sigma$ [s/m] |                      |
| 5150MHz                                                           | 08/30/2005  | -              | -              | 52.05             | 5.346          | 21.9                 |
| 5200MHz                                                           | 08/30/2005  | -              | -              | 51.83             | 5.401          | 21.9                 |
| 5250MHz                                                           | 08/30/2005  | -              | -              | 51.67             | 5.475          | 21.9                 |
| 5300MHz                                                           | 08/30/2005  | -              | -              | 51.45             | 5.518          | 21.9                 |
| 5350MHz                                                           | 08/30/2005  | -              | -              | 51.26             | 5.572          | 21.9                 |
| 5800MHz                                                           | 08/30/2005  | 48.2           | 6.00           | 50.23             | 6.285          | 21.9                 |
| 5850MHz                                                           | 08/30/2005  | -              | -              | 50.10             | 6.364          | 21.9                 |

| Body Tissue Simulant Measurement ( Sep. 2, 2005) for 5800MHz SAR |             |                |                |                   |                |                      |
|------------------------------------------------------------------|-------------|----------------|----------------|-------------------|----------------|----------------------|
| Frequency<br>[MHz]                                               | Description | Standard Value |                | Measurement Value |                | Tissue Temp.<br>[°C] |
|                                                                  |             | $\epsilon_r$   | $\sigma$ [s/m] | $\epsilon_r$      | $\sigma$ [s/m] |                      |
| 5700MHz                                                          | 09/02/2005  | -              | -              | 50.61             | 6.115          | 21.1                 |
| 5750MHz                                                          | 09/02/2005  | -              | -              | 50.48             | 6.143          | 21.1                 |
| 5800MHz                                                          | 09/02/2005  | 48.2           | 6.00           | 50.27             | 6.261          | 21.1                 |
| 5850MHz                                                          | 09/02/2005  | -              | -              | 50.15             | 6.332          | 21.1                 |

### 4.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


| Target Frequency | Head         |                | Body         |                |
|------------------|--------------|----------------|--------------|----------------|
| (MHz)            | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150              | 52.3         | 0.76           | 61.9         | 0.80           |
| 300              | 45.3         | 0.87           | 58.2         | 0.92           |
| 450              | 43.5         | 0.87           | 56.7         | 0.94           |
| 835              | 41.5         | 0.90           | 55.2         | 0.97           |
| 900              | 41.5         | 0.97           | 55.0         | 1.05           |
| 915              | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450             | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610             | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800 – 2000      | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450             | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000             | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800             | 35.3         | 5.27           | 48.2         | 6.00           |

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

## 5. SAR Measurement Procedure

### 5.1 SAR System Validation

#### 5.1.1 Validation Dipoles

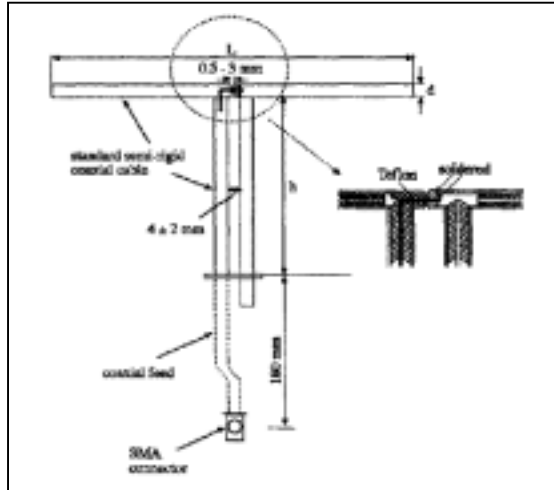

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

| Frequency | L (mm) | h (mm) | d (mm) |
|-----------|--------|--------|--------|
| 2450MHz   | 53.5   | 30.4   | 3.6    |
| 5200MHz   | 23.6   | 14.0   | 3.6    |
| 5800MHz   | 21.6   | 12.6   | 3.6    |

#### 5.1.2 Validation Result

##### System Performance Check at 2450MHz

##### Validation Kit: ASL-D-2450-S-2

| Frequency<br>[MHz] | Description                     | SAR [w/kg]<br>1g       | SAR [w/kg]<br>10g  | Tissue Temp.<br>[°C] |
|--------------------|---------------------------------|------------------------|--------------------|----------------------|
| 2450 MHz           | Reference result<br>± 5% window | 52.4<br>49.78 to 55.02 | 24<br>22.8 to 25.2 | N/A                  |
|                    | 08/29/2005                      | 53.599                 | 23.985             | 21.4                 |

Note: All SAR values are 1W forward power.

### System Performance Check at 5200MHz

#### Validation Kit: ASL-D-5200-S-2

| Frequency<br>[MHz] | Description                      | SAR [w/kg]<br>1g       | SAR [w/kg]<br>10g      | Tissue Temp.<br>[°C] |
|--------------------|----------------------------------|------------------------|------------------------|----------------------|
| 5200 MHz           | Reference result<br>± 10% window | 62.9<br>56.61 to 69.19 | 17.9<br>16.11 to 19.69 | N/A                  |
|                    | 08/30/2005                       | 64.541                 | 19.132                 | 21.9                 |

Note: All SAR values are 1W forward power.

### System Performance Check at 5800MHz

#### Validation Kit: ASL-D-5800-S-2

| Frequency<br>[MHz] | Description                      | SAR [w/kg]<br>1g       | SAR [w/kg]<br>10g  | Tissue Temp.<br>[°C] |
|--------------------|----------------------------------|------------------------|--------------------|----------------------|
| 5800 MHz           | Reference result<br>± 10% window | 58.3<br>52.47 to 64.13 | 18<br>16.2 to 19.8 | N/A                  |
|                    | 30-Aug-2005                      | 57.249                 | 17.737             | 21.1                 |

Note: All SAR values are 1W forward power.

## 5.2 SAR Measurement Procedure

The ALSAS-10U calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

$\sigma$ : represents the simulated tissue conductivity

$\rho$ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm<sup>2</sup>) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm<sup>3</sup>).

## 6. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Type Exposure                                            | Uncontrolled Environment Limit |
|----------------------------------------------------------|--------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body)      | <b>1.60 W/kg</b>               |
| Spatial Average SAR (whole body)                         | <b>0.08 W/kg</b>               |
| Spatial Peak SAR (10g for hands, feet, ankles and wrist) | <b>4.00 W/kg</b>               |

## 7. Test Equipment List

| Instrument                          | Manufact-urer | Model No.              | Serial No.  | Last Calibration |
|-------------------------------------|---------------|------------------------|-------------|------------------|
| Data Acquisition Package            | Aprel         | ALS-DAQ-PAQ-2          | 110-00203   | 24 Mar. 2005     |
| Aprel Laboratories Probe            | Aprel         | ALS-E020               | 266         | 24 Mar. 2005     |
| Aprel Reference Dipole<br>2450MHz   | Aprel         | ALS-D-2450-S-2         | 220-00753   | 4 Mar. 2005      |
| Aprel Reference Dipole<br>5200MHz   | Aprel         | ALS-D-5200-S-2         | 230-00802   | 4 Mar. 2005      |
| Aprel Reference Dipole<br>5800MHz   | Aprel         | ALS-D-5800-S-2         | 240-00852   | 4 Mar. 2005      |
| Boundary Detection Sensor<br>System | Aprel         | ALS-PMDPS-2            | 120-00253   | N/A              |
| Universal Work Station              | Aprel         | ALS-UWS                | 100-00153   | N/A              |
| Device Holder 2.0                   | Aprel         | ALS-H-E-SET-2          | 170-00503   | N/A              |
| Left Ear SAM Phantom                | Aprel         | ALS-P-SAM-L            | 130-00305   | N/A              |
| Right Ear SAM Phantom               | Aprel         | ALS-P-SAM-R            | 140-00355   | N/A              |
| Universal Phantom                   | Aprel         | ALS-P-UP-1             | 150-00405   | N/A              |
| Aprel Dipole Spacer                 | Aprel         | ALS-DS-U               | 250-00903   | N/A              |
| SAR Software                        | Aprel         | ALSAS-10U<br>Ver.2.2.0 | B0D5F-112FE | N/A              |
| CRS C500C Controller                | Thermo        | ALS-C500               | RCF0440278  | N/A              |
| CRF F3 Robot                        | Thermo        | ALS-F3                 | RAF0440252  | N/A              |
| Power Amplifier                     | Mini-Circuit  | ZVE-8G                 | D030305     | N/A              |
| Vector Network Analyzer             | Agilent       | E5071B                 | MY42402726  | 5 Aug. 2005      |
| Dielectric Probe Kit                | Aglient       | 85070E                 | MY44300124  | N/A              |
| Signal Generator                    | Anritsu       | MG3692A                | 020311      | 15 Feb. 2005     |
| Power Meter                         | Agilent       | 438A                   | 3513U06187  | 14 Feb. 2005     |
| Power Sensor                        | Agilent       | 84815A                 | 3318A01828  | 15 Feb. 2005     |

**Note:** All equipment upon which need to be calibrated are with calibration period of 1 year.

## 8. Measurement Uncertainty

### Exposure Assessment Measurement Uncertainty

| Source of Uncertainty                            | Tolerance Value | Probability Distribution | Divisor    | $c_i^{-1}$ (1-g) | $c_i^{-1}$ (10-g) | Standard Uncertainty (1-g) % | Standard Uncertainty (10-g) % |
|--------------------------------------------------|-----------------|--------------------------|------------|------------------|-------------------|------------------------------|-------------------------------|
| Measurement System                               |                 |                          |            |                  |                   |                              |                               |
| Probe Calibration                                | 3.5             | normal                   | 1          | 1                | 1                 | 3.5                          | 3.5                           |
| Axial Isotropy                                   | 3.7             | rectangular              | $\sqrt{3}$ | $(1-cp)^{1/2}$   | $(1-cp)^{1/2}$    | 1.5                          | 1.5                           |
| Hemispherical Isotropy                           | 10.9            | rectangular              | $\sqrt{3}$ | $\sqrt{cp}$      | $\sqrt{cp}$       | 4.4                          | 4.4                           |
| Boundary Effect                                  | 1.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.6                          | 0.6                           |
| Linearity                                        | 4.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.7                          | 2.7                           |
| Detection Limit                                  | 1.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.6                          | 0.6                           |
| Readout Electronics                              | 1.0             | normal                   | 1          | 1                | 1                 | 1.0                          | 1.0                           |
| Response Time                                    | 0.8             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.5                          | 0.5                           |
| Integration Time                                 | 1.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.0                          | 1.0                           |
| RF Ambient Condition                             | 3.0             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.7                          | 1.7                           |
| Probe Positioner Mech.                           | 0.4             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 0.2                          | 0.2                           |
| Restriction                                      |                 |                          |            |                  |                   |                              |                               |
| Probe Positioning with respect to Phantom Shell  | 2.9             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 1.7                          | 1.7                           |
| Extrapolation and Integration                    | 3.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.1                          | 2.1                           |
| Test Sample Positioning                          | 4.0             | normal                   | 1          | 1                | 1                 | 4.0                          | 4.0                           |
| Device Holder Uncertainty                        | 2.0             | normal                   | 1          | 1                | 1                 | 2.0                          | 2.0                           |
| Drift of Output Power                            | 4.7             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.7                          | 2.7                           |
| Phantom and Setup                                |                 |                          |            |                  |                   |                              |                               |
| Phantom Uncertainty(shape & thickness tolerance) | 3.4             | rectangular              | $\sqrt{3}$ | 1                | 1                 | 2.0                          | 2.0                           |
| Liquid Conductivity(target)                      | 5.0             | rectangular              | $\sqrt{3}$ | 0.7              | 0.5               | 2.0                          | 1.4                           |
| Liquid Conductivity(meas.)                       | 4.5             | normal                   | 1          | 0.7              | 0.5               | 3.1                          | 2.2                           |
| Liquid Permittivity(target)                      | 5.0             | rectangular              | $\sqrt{3}$ | 0.6              | 0.5               | 1.7                          | 1.4                           |
| Liquid Permittivity(meas.)                       | 4.5             | normal                   | 1          | 0.6              | 0.5               | 2.7                          | 2.2                           |
| Combined Uncertainty                             |                 | RSS                      |            |                  |                   | 10.8                         | 10.3                          |
| Combined Uncertainty (coverage factor=2)         |                 | Normal(k=2)              |            |                  |                   | 21.5                         | 20.6                          |

## 9. Test Result Summary

### 9.1 802.11b Test Result

| SAR Measurement                         |                 |           |      |                                    |                  |                 |
|-----------------------------------------|-----------------|-----------|------|------------------------------------|------------------|-----------------|
| <i>Ambient Temperature (°C) : 22 ±1</i> |                 |           |      | <i>Relative Humidity (%) : 53</i>  |                  |                 |
| <i>Liquid Temperature (°C) : 21.5±1</i> |                 |           |      | <i>Depth of Liquid (cm):&gt;15</i> |                  |                 |
| Product :                               |                 |           |      |                                    |                  |                 |
| Test Mode : 802.11b ( Right Antenna)    |                 |           |      |                                    |                  |                 |
| Test Position<br>of EUT                 | Antenna<br>Type | Frequency |      | Conducted<br>power<br>(dBm)        | SAR 1g<br>(W/Kg) | Limit<br>(W/Kg) |
|                                         |                 | Channel   | MHz  |                                    |                  |                 |
| Bottom                                  | Internal        | Low       | 2412 | 17.71                              | 0.769            | 1.6             |
| Bottom                                  | Internal        | Mid       | 2437 | 17.21                              | 0.643            | 1.6             |
| Bottom                                  | Internal        | High      | 2462 | 17.70                              | 0.452            | 1.6             |
| Top                                     | Internal        | Mid       | 2437 | 17.21                              | 0.162            | 1.6             |
| Front End                               | Internal        | Mid       | 2437 | 17.21                              | 0.224            | 1.6             |
| Test Mode : 802.11b ( Left Antenna)     |                 |           |      |                                    |                  |                 |
| Bottom                                  | Internal        | Low       | 2412 | 17.71                              | 0.516            | 1.6             |
| Bottom                                  | Internal        | Mid       | 2437 | 17.21                              | 0.543            | 1.6             |
| Bottom                                  | Internal        | High      | 2462 | 17.70                              | 0.555            | 1.6             |
| Top                                     | Internal        | Mid       | 2437 | 17.21                              | 0.183            | 1.6             |
| Front End                               | Internal        | Mid       | 2437 | 17.21                              | 0.188            | 1.6             |

### 9.2 802.11g Test Result

| SAR Measurement                      |              |           |      |                           |               |              |
|--------------------------------------|--------------|-----------|------|---------------------------|---------------|--------------|
| Ambient Temperature (°C) : 22 ±1     |              |           |      | Relative Humidity (%): 53 |               |              |
| Liquid Temperature (°C) : 21.5±1     |              |           |      | Depth of Liquid (cm):>15  |               |              |
| Product :                            |              |           |      |                           |               |              |
| Test Mode : 802.11g ( Right Antenna) |              |           |      |                           |               |              |
| Test Position of EUT                 | Antenna Type | Frequency |      | Conducted power (dBm)     | SAR 1g (W/Kg) | Limit (W/Kg) |
|                                      |              | Channel   | MHz  |                           |               |              |
| Bottom                               | Internal     | Low       | 2412 | 16.69                     | 0.489         | 1.6          |
| Bottom                               | Internal     | Mid       | 2437 | 16.55                     | 0.357         | 1.6          |
| Bottom                               | Internal     | High      | 2462 | 16.62                     | 0.249         | 1.6          |
| Top                                  | Internal     | Mid       | 2437 | 16.55                     | 0.099         | 1.6          |
| Front End                            | Internal     | Mid       | 2437 | 16.55                     | 0.166         | 1.6          |
| Test Mode : 802.11g ( Left Antenna)  |              |           |      |                           |               |              |
| Bottom                               | Internal     | Low       | 2412 | 16.69                     | 0.437         | 1.6          |
| Bottom                               | Internal     | Mid       | 2437 | 16.55                     | 0.425         | 1.6          |
| Bottom                               | Internal     | High      | 2462 | 16.62                     | 0.397         | 1.6          |
| Top                                  | Internal     | Mid       | 2437 | 16.55                     | 0.108         | 1.6          |
| Front End                            | Internal     | Mid       | 2437 | 16.55                     | 0.123         | 1.6          |

### 9.3 802.11a (5150MHz ~5350MHz, Normal Mode) Test Result

| SAR Measurement                                                   |              |           |      |                           |               |              |
|-------------------------------------------------------------------|--------------|-----------|------|---------------------------|---------------|--------------|
| Ambient Temperature (°C) : 22 ±1                                  |              |           |      | Relative Humidity (%): 53 |               |              |
| Liquid Temperature (°C) : 21.5±1                                  |              |           |      | Depth of Liquid (cm):>15  |               |              |
| Product :                                                         |              |           |      |                           |               |              |
| Test Mode : 802.11a (5150MHz ~5350MHz, Normal Mode) Right Antenna |              |           |      |                           |               |              |
| Test Position of EUT                                              | Antenna Type | Frequency |      | Conducted power (dBm)     | SAR 1g (W/Kg) | Limit (W/Kg) |
|                                                                   |              | Channel   | MHz  |                           |               |              |
| Bottom                                                            | Internal     | Low       | 5180 | 15.30                     | 0.752         | 1.6          |
| Bottom                                                            | Internal     | High      | 5240 | 15.07                     | 0.715         | 1.6          |
| Bottom                                                            | Internal     | Low       | 5260 | 15.73                     | 0.661         | 1.6          |
| Bottom                                                            | Internal     | High      | 5320 | 14.76                     | 0.670         | 1.6          |
| Top                                                               | Internal     | Low       | 5260 | 15.73                     | 0.228         | 1.6          |
| Front End                                                         | Internal     | Low       | 5260 | 15.73                     | 0.463         | 1.6          |
| Test Mode : 802.11a (5150MHz ~5350MHz, Normal Mode) Left Antenna  |              |           |      |                           |               |              |
| Bottom                                                            | Internal     | Low       | 5180 | 15.30                     | 0.551         | 1.6          |
| Bottom                                                            | Internal     | High      | 5240 | 15.07                     | 0.603         | 1.6          |
| Bottom                                                            | Internal     | Low       | 5260 | 15.73                     | 0.504         | 1.6          |
| Bottom                                                            | Internal     | High      | 5320 | 14.76                     | 0.523         | 1.6          |
| Top                                                               | Internal     | Low       | 5260 | 15.73                     | 0.225         | 1.6          |
| Front End                                                         | Internal     | Low       | 5260 | 15.73                     | 0.241         | 1.6          |

### 9.4 802.11a (5150MHz ~5350MHz, Turbo Mode) Test Result

| SAR Measurement                                                  |              |           |      |                           |               |              |
|------------------------------------------------------------------|--------------|-----------|------|---------------------------|---------------|--------------|
| Ambient Temperature (°C) : 22 ±1                                 |              |           |      | Relative Humidity (%): 53 |               |              |
| Liquid Temperature (°C) : 21.5±1                                 |              |           |      | Depth of Liquid (cm):>15  |               |              |
| Product :                                                        |              |           |      |                           |               |              |
| Test Mode : 802.11a (5150MHz ~5350MHz, Turbo Mode) Right Antenna |              |           |      |                           |               |              |
| Test Position of EUT                                             | Antenna Type | Frequency |      | Conducted power (dBm)     | SAR 1g (W/Kg) | Limit (W/Kg) |
|                                                                  |              | Channel   | MHz  |                           |               |              |
| Bottom                                                           | Internal     | Low       | 5210 | 15.39                     | 0.735         | 1.6          |
| Bottom                                                           | Internal     | Mid.      | 5250 | 14.76                     | 0.484         | 1.6          |
| Bottom                                                           | Internal     | High      | 5290 | 13.84                     | 0.506         | 1.6          |
| Top                                                              | Internal     | Mid.      | 5250 | 14.76                     | 0.220         | 1.6          |
| Front End                                                        | Internal     | Mid.      | 5250 | 14.76                     | 0.402         | 1.6          |
| Test Mode : 802.11a (5150MHz ~5350MHz, Turbo Mode) Left Antenna  |              |           |      |                           |               |              |
| Bottom                                                           | Internal     | Low       | 5210 | 15.39                     | 0.534         | 1.6          |
| Bottom                                                           | Internal     | Mid.      | 5250 | 14.76                     | 0.513         | 1.6          |
| Bottom                                                           | Internal     | High      | 5290 | 13.84                     | 0.452         | 1.6          |
| Top                                                              | Internal     | Mid.      | 5250 | 14.76                     | 0.240         | 1.6          |
| Front End                                                        | Internal     | Mid.      | 5250 | 14.76                     | 0.264         | 1.6          |

### 9.5 802.11a (5725MHz ~5825MHz, Normal Mode) Test Result

|                                                                   |              |           |      |                           |               |              |
|-------------------------------------------------------------------|--------------|-----------|------|---------------------------|---------------|--------------|
| SAR Measurement                                                   |              |           |      |                           |               |              |
| Ambient Temperature (°C) : 22 ±1                                  |              |           |      | Relative Humidity (%): 53 |               |              |
| Liquid Temperature (°C) : 21.5±1                                  |              |           |      | Depth of Liquid (cm):>15  |               |              |
| Product :                                                         |              |           |      |                           |               |              |
| Test Mode : 802.11a (5725MHz ~5825MHz, Normal Mode) Right Antenna |              |           |      |                           |               |              |
| Test Position of EUT                                              | Antenna Type | Frequency |      | Conducted power (dBm)     | SAR 1g (W/Kg) | Limit (W/Kg) |
|                                                                   |              | Channel   | MHz  |                           |               |              |
| Bottom                                                            | Internal     | Low       | 5745 | 13.05                     | 0.549         | 1.6          |
| Bottom                                                            | Internal     | Mid.      | 5765 | 13.99                     | 0.628         | 1.6          |
| Bottom                                                            | Internal     | High      | 5805 | 14.07                     | 0.554         | 1.6          |
| Top                                                               | Internal     | Mid,      | 5765 | 13.99                     | 0.228         | 1.6          |
| Front End                                                         | Internal     | Mid.      | 5765 | 13.99                     | 0.481         | 1.6          |
| Test Mode : 802.11a (5725MHz ~5825MHz, Normal Mode) Left Antenna  |              |           |      |                           |               |              |
| Bottom                                                            | Internal     | Low       | 5745 | 13.05                     | 0.484         | 1.6          |
| Bottom                                                            | Internal     | Mid.      | 5765 | 13.99                     | 0.545         | 1.6          |
| Bottom                                                            | Internal     | High      | 5805 | 14.07                     | 0.495         | 1.6          |
| Top                                                               | Internal     | Mid,      | 5765 | 13.99                     | 0.275         | 1.6          |
| Front End                                                         | Internal     | Mid.      | 5765 | 13.99                     | 0.493         | 1.6          |

### 9.6 802.11a (5725MHz ~5825MHz, Turbo Mode) Test Result

| SAR Measurement                                                  |              |           |      |                           |               |              |
|------------------------------------------------------------------|--------------|-----------|------|---------------------------|---------------|--------------|
| Ambient Temperature (°C) : 22 ±1                                 |              |           |      | Relative Humidity (%): 53 |               |              |
| Liquid Temperature (°C) : 21.5±1                                 |              |           |      | Depth of Liquid (cm):>15  |               |              |
| Product :                                                        |              |           |      |                           |               |              |
| Test Mode : 802.11a (5725MHz ~5825MHz, Turbo Mode) Right Antenna |              |           |      |                           |               |              |
| Test Position of EUT                                             | Antenna Type | Frequency |      | Conducted power (dBm)     | SAR 1g (W/Kg) | Limit (W/Kg) |
|                                                                  |              | Channel   | MHz  |                           |               |              |
| Bottom                                                           | Internal     | Low       | 5760 | 13.09                     | 0.597         | 1.6          |
| Bottom                                                           | Internal     | High      | 5800 | 8.85                      | 0.293         | 1.6          |
| Top                                                              | Internal     | Mid.      | 5760 | 13.09                     | 0.210         | 1.6          |
| Front End                                                        | Internal     | Mid.      | 5760 | 13.09                     | 0.429         | 1.6          |
| Test Mode : 802.11a (5725MHz ~5825MHz, Turbo Mode) Left Antenna  |              |           |      |                           |               |              |
| Bottom                                                           | Internal     | Low       | 5760 | 13.09                     | 0.448         | 1.6          |
| Bottom                                                           | Internal     | High      | 5800 | 8.85                      | 0.239         | 1.6          |
| Top                                                              | Internal     | Mid.      | 5760 | 13.09                     | 0.220         | 1.6          |
| Front End                                                        | Internal     | Mid.      | 5760 | 13.09                     | 0.427         | 1.6          |

## 10. SAR System Validation Data

### 10.1 2450MHz System Validation Data

Validation date : 29-Aug-2005  
Measurement Date : 29-Aug-2005

#### Product Data

Device Name : Dipole-2450  
Serial No. : 753  
Type : Dipole  
Model : ALS-D-2450-S-2  
Frequency : 2450.00 MHz  
Max. Transmit Pwr : 1 W  
Drift Time : 0 min(s)  
Length : 52.1 mm  
Width : 3.6 mm  
Depth : 31.0 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 62.501 W/kg  
Power Drift-Finish : 62.319 W/kg  
Power Drift (%) : -0.292

#### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : uni\_1

#### Tissue Data

Type : HEAD  
Serial No. : 2450H0811  
Frequency : 2450.00 MHz  
Last Calib. Date : 29-Aug-2005  
Temperature : 21.40 °C  
Ambient Temp. : 22.30 °C  
Humidity : 53.00 RH%  
Epsilon : 38.70 F/m  
Sigma : 1.85 S/m  
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field Probe  
Model : ALS-E-020  
Type : E-Field Triangle  
Serial No. : 266  
Last Calib. Date : 16-Mar-2005  
Frequency : 2450.00 MHz  
Duty Cycle Factor : 1  
Conversion Factor : 4.9  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

Measurement Data


Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C

Measurement Data

Crest Factor : 1  
Set-up Date : 29-Aug-2005  
Temperature : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm  
Frequency : 2450MHz

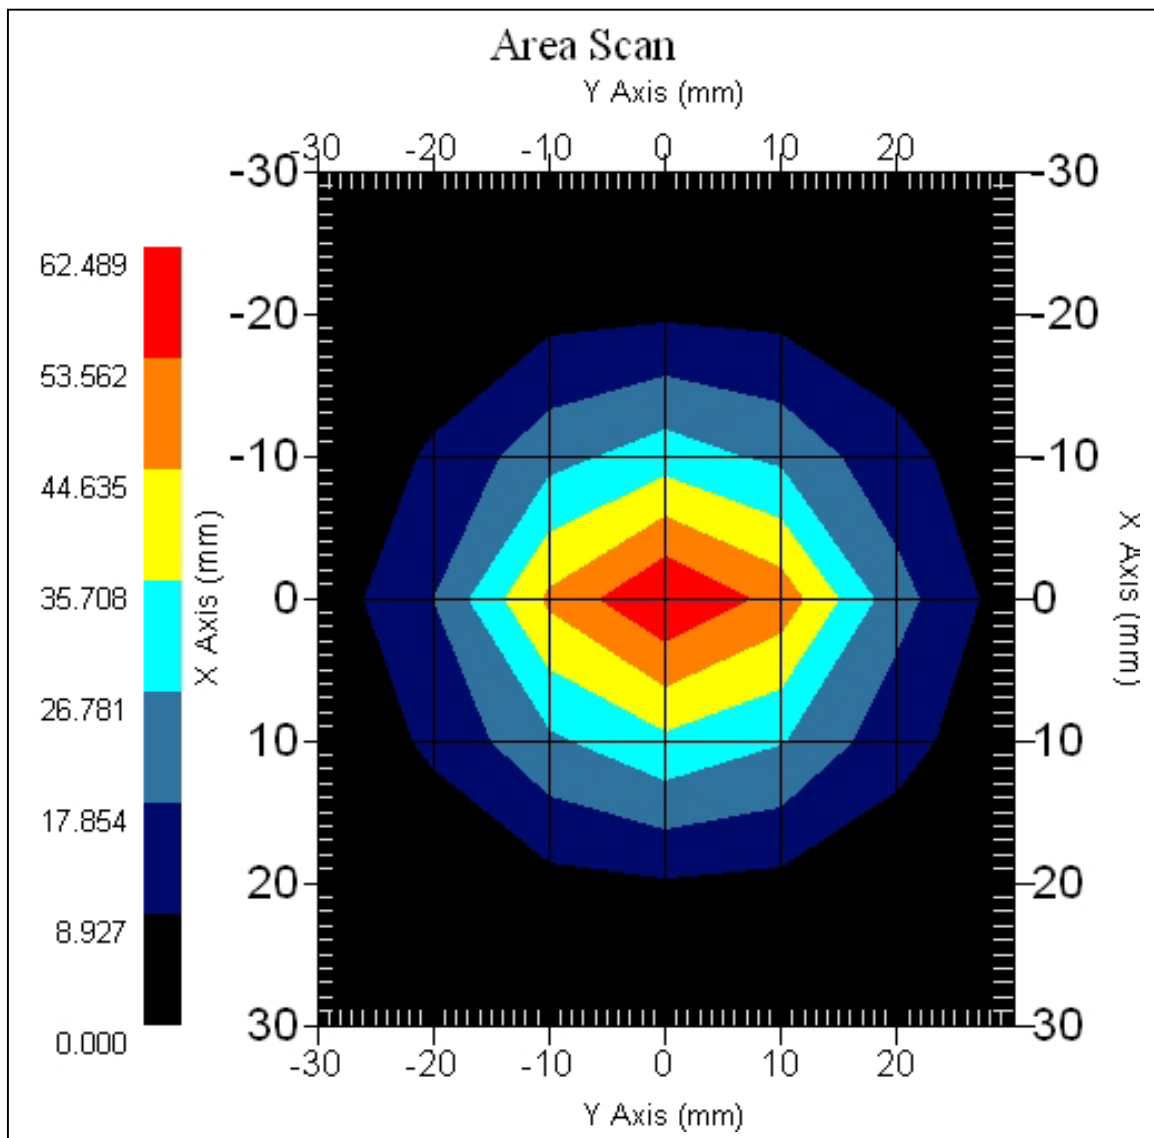

1 gram SAR value : 53.599 W/kg  
10 gram SAR value : 23.985 W/kg  
Area Scan Peak SAR : 62.487 W/kg  
Zoom Scan Peak SAR : 113.980 W/kg

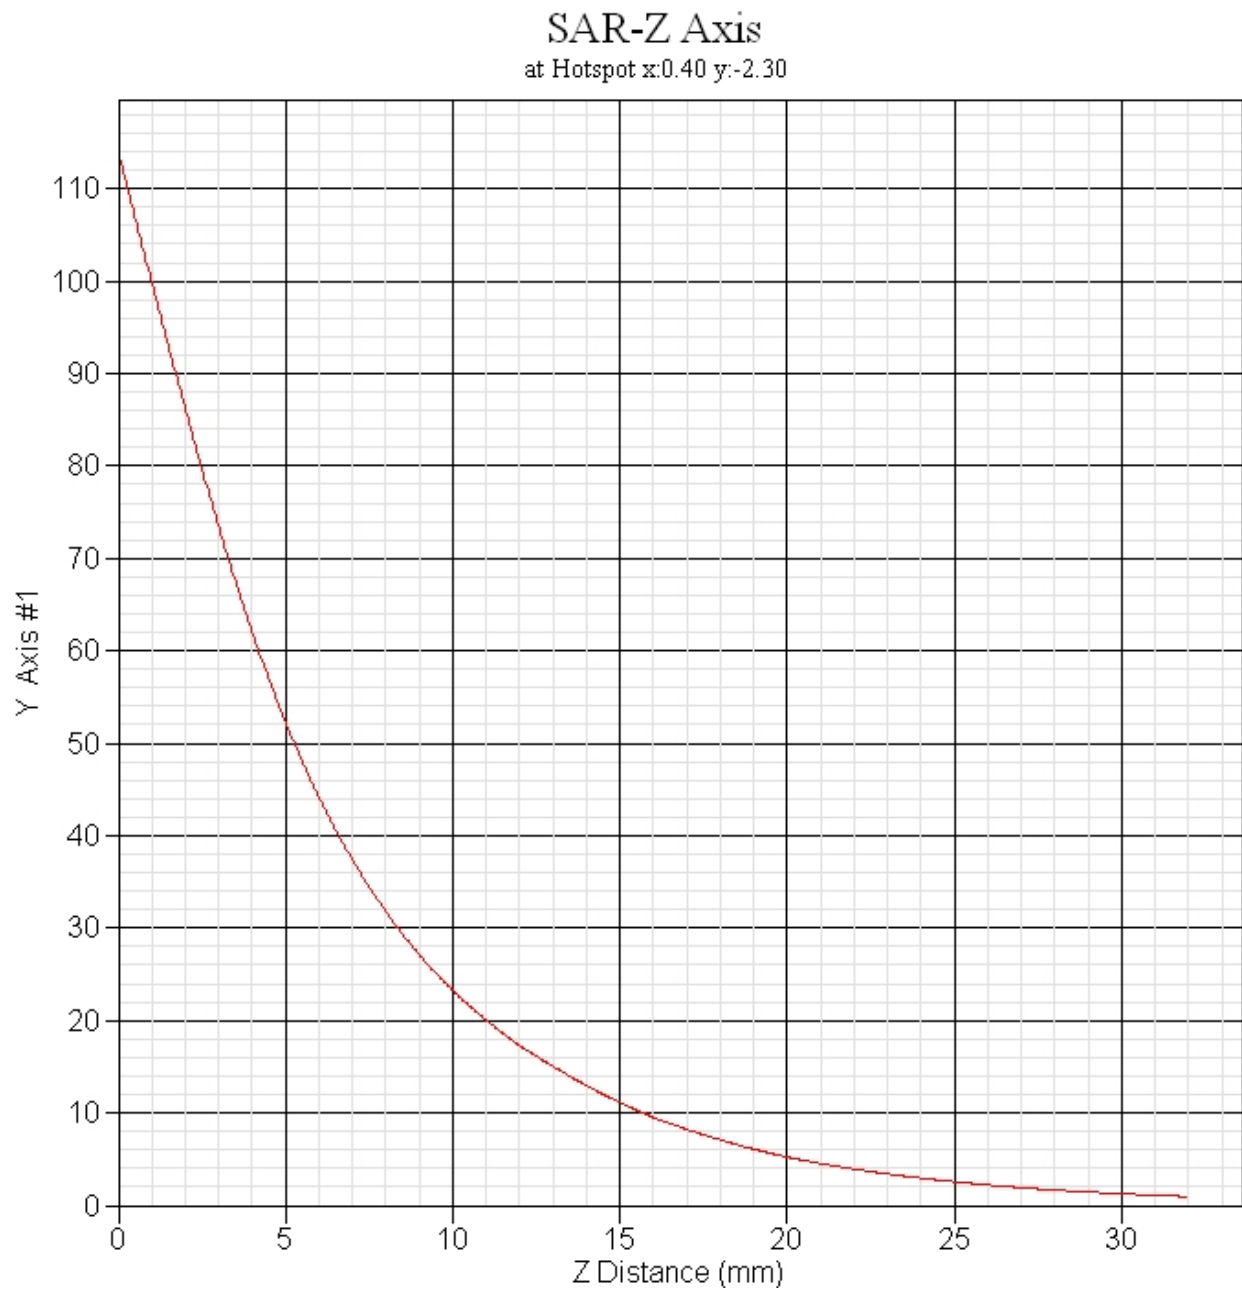

## 10.2 5200 MHz System Validation Data

Validation date : 30-Aug-2005  
Measurement Date : 30-Aug-2005

### Product Data

Device Name : Dipole-5200  
Serial No. : 230-00802  
Type : Dipole  
Model : ALS-D-5200-S-2  
Frequency : 5200.00 MHz  
Max. Transmit Pwr : 1 W  
Drift Time : 0 min(s)  
Length : 23.4 mm  
Width : 3.6 mm  
Depth : 15.4 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 18.633 W/kg  
Power Drift-Finish : 18.276 W/kg  
Power Drift (%) : -1.916

### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : uni\_1

### Tissue Data

Type : HEAD  
Serial No. : 5200-H-AU-18  
Frequency : 5200.00 MHz  
Last Calib. Date : 30-Aug-2005  
Temperature : 21.90 °C  
Ambient Temp. : 22.80 °C  
Humidity : 58.00 RH%  
Epsilon : 37.85 F/m  
Sigma : 4.892 S/m  
Density : 1000.00 kg/cu. m

### Probe Data

Name : E-field Probe  
Model : ALS-E-020  
Type : E-Field Triangle  
Serial No. : 266  
Last Calib. Date : 16-Mar-2005  
Frequency : 5200.00 MHz

**International Standards Laboratory**

**Report Number: ISL-05LR025SAR-F-1**


HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997


Duty Cycle Factor : 1  
Conversion Factor : 3.8  
Probe Sensitivity : 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point : 95.00 mV  
Offset : 1.56 mm

#### Measurement Data

Crest Factor : 1  
Tissue Temp. : 21.90 °C  
Ambient Temp. : 22.80 °C  
Area Scan : 5x6x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 9x9x13 : Measurement x=4mm, y=4mm, z=2.5mm  
Frequency : 5200MHz

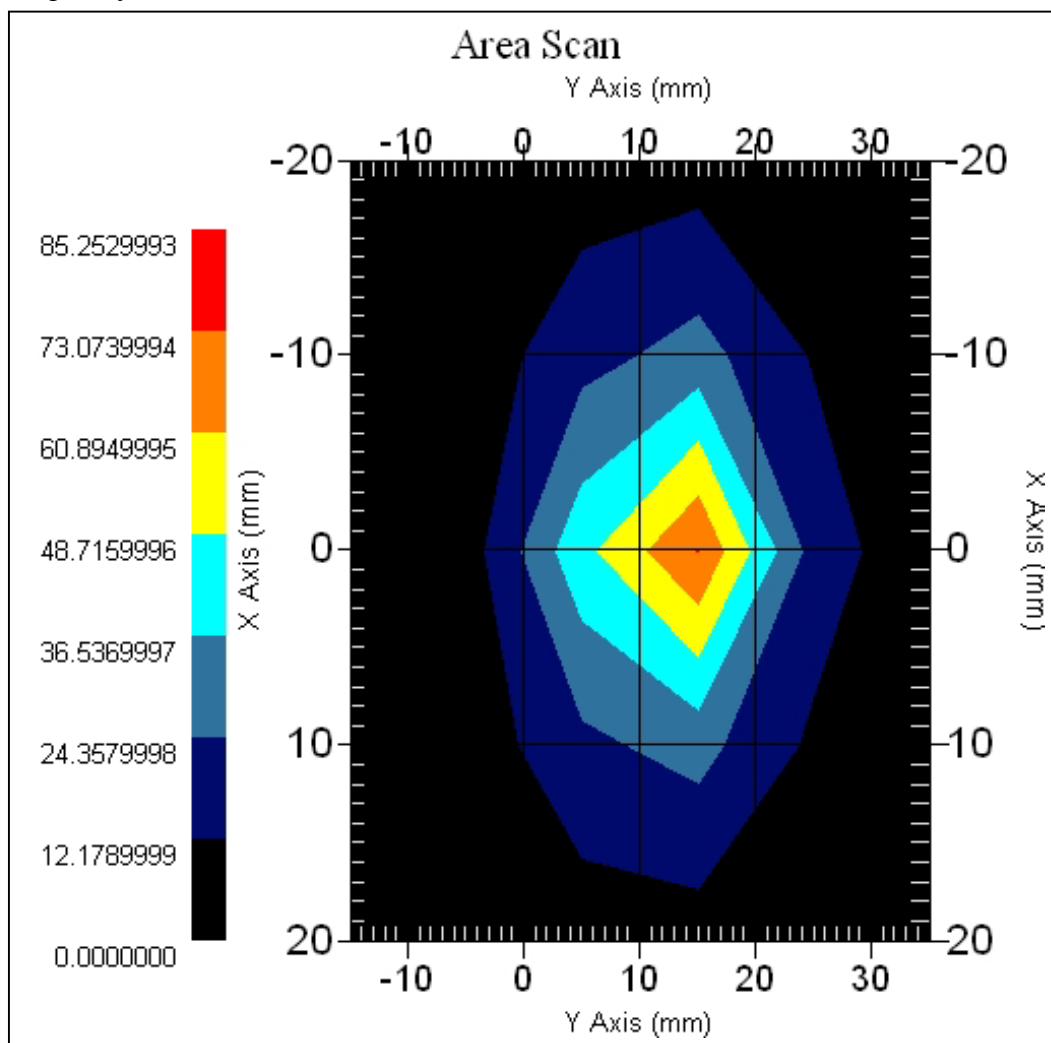

1 gram SAR value : 64.541 W/kg  
10 gram SAR value : 19.132 W/kg  
Area Scan Peak SAR : 73.075 W/kg  
Zoom Scan Peak SAR : 181.147 W/kg

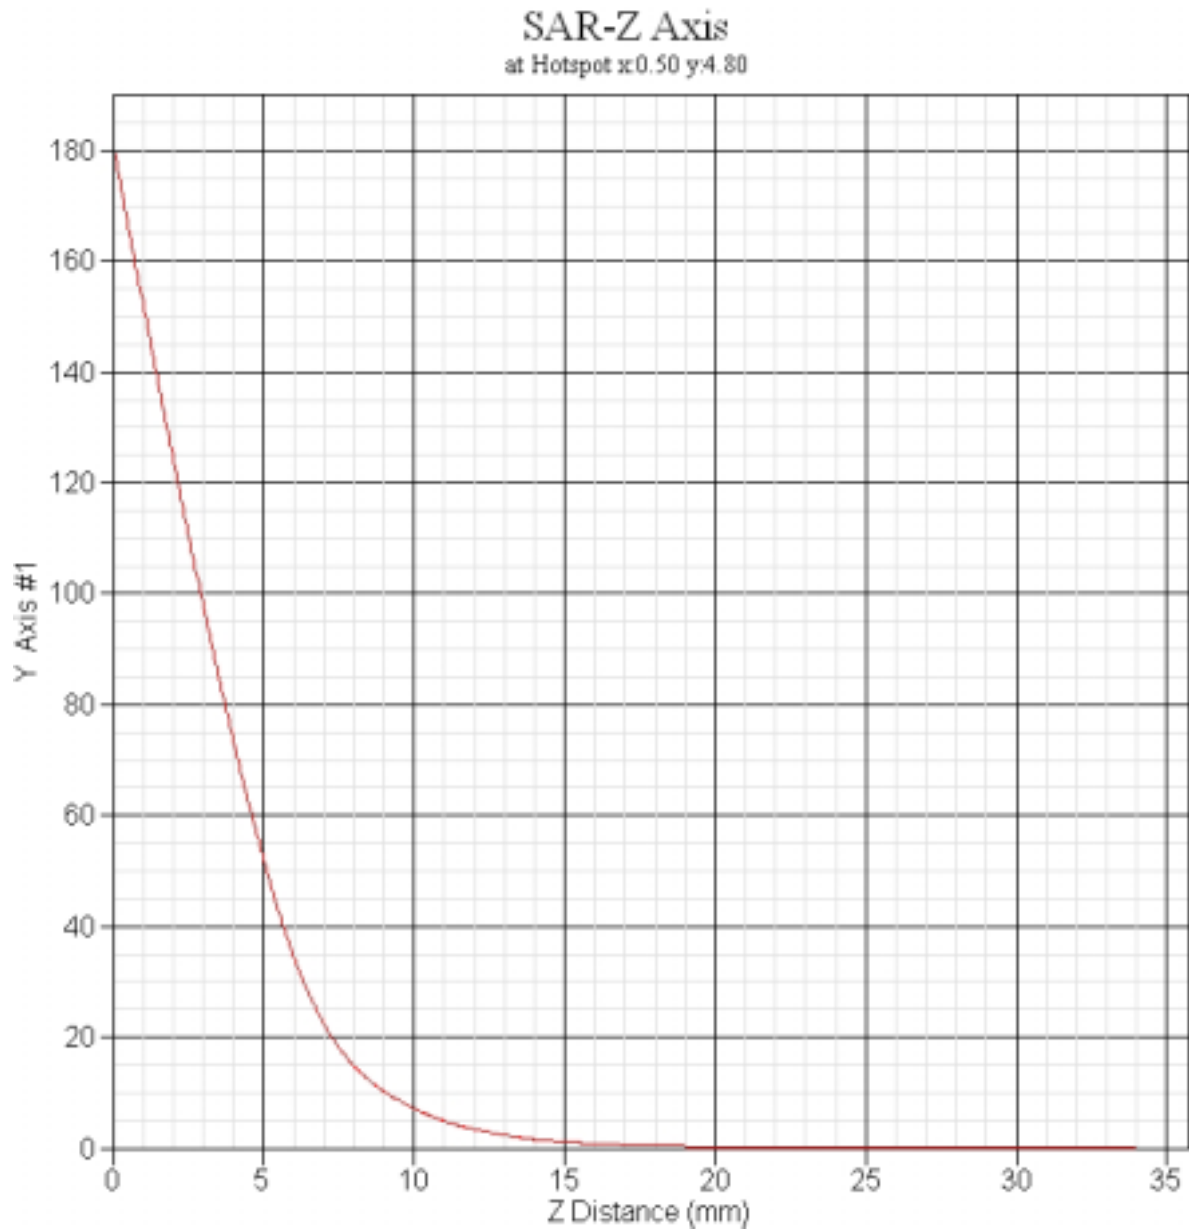

### 10.3 5800 MHz System Validation Data

Validation date : 2-Sep-2005  
Measurement Date : 2-Sep-2005

#### Product Data

Device Name : Dipole-5800  
Serial No. : 240-00852  
Type : Dipole  
Model : ALS-D-5800-S-2  
Frequency : 5800.00 MHz  
Max. Transmit Pwr : 1 W  
Drift Time : 0 min(s)  
Length : 21.4 mm  
Width : 3.6 mm  
Depth : 14.7 mm  
Antenna Type : Internal  
Orientation : Touch  
Power Drift-Start : 16.488 W/kg  
Power Drift-Finish: 16.004 W/kg  
Power Drift (%) : -2.933  
Picture :

#### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Serial No. : System Default  
Location : Center  
Description : uni\_1

#### Tissue Data

Type : HEAD  
Serial No. : 5800-H-AU-19  
Frequency : 5800.00 MHz  
Last Calib. Date : 02-Sep-2005  
Temperature : 21.10 °C  
Ambient Temp. : 21.90 °C  
Humidity : 51.00 RH%  
Epsilon : 36.90 F/m  
Sigma : 5.491 S/m  
Density : 1000.00 kg/cu. m

#### Probe Data

Name : E-field Probe  
Model : ALS-E-020  
Type : E-Field Triangle  
Serial No. : 266  
Last Calib. Date : 16-Mar-2005  
Frequency : 5800.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 3.7  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm

**International Standards Laboratory**

**Report Number: ISL-05LR025SAR-F-1**

**HC LAB:**NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178  
**LT LAB:**NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

Measurement Data

Crest Factor : 1


Tissue Temp. : 21.10 °C

Ambient Temp. : 21.90 °C

Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm

Zoom Scan : 9x9x13 : Measurement x=4mm, y=4mm, z=2.5mm

Frequency : 5800MHz

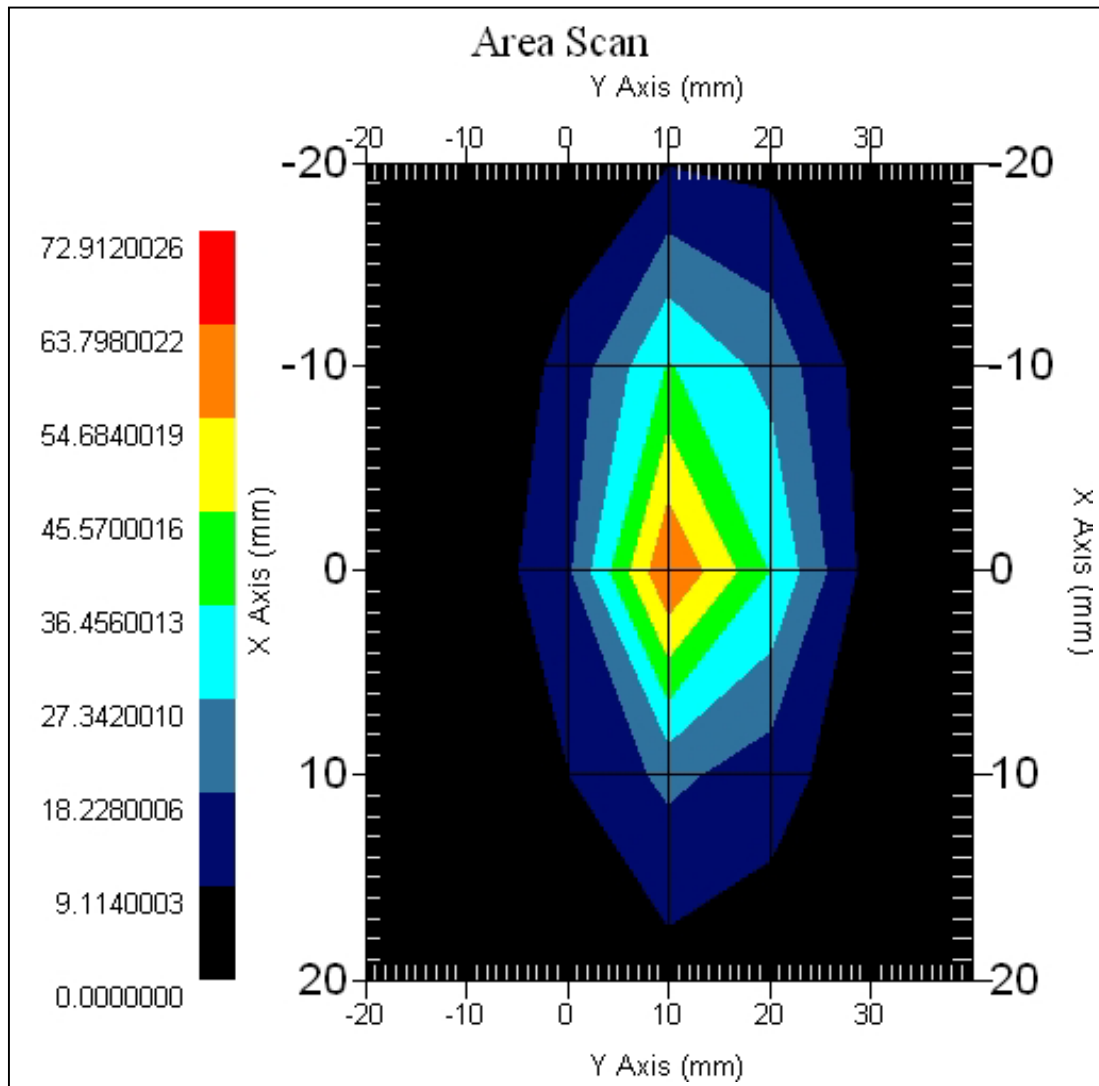


1 gram SAR value : 57.249 W/kg

10 gram SAR value : 17.737 W/kg

Area Scan Peak SAR : 63.800 W/kg

Zoom Scan Peak SAR : 167.134 W/kg

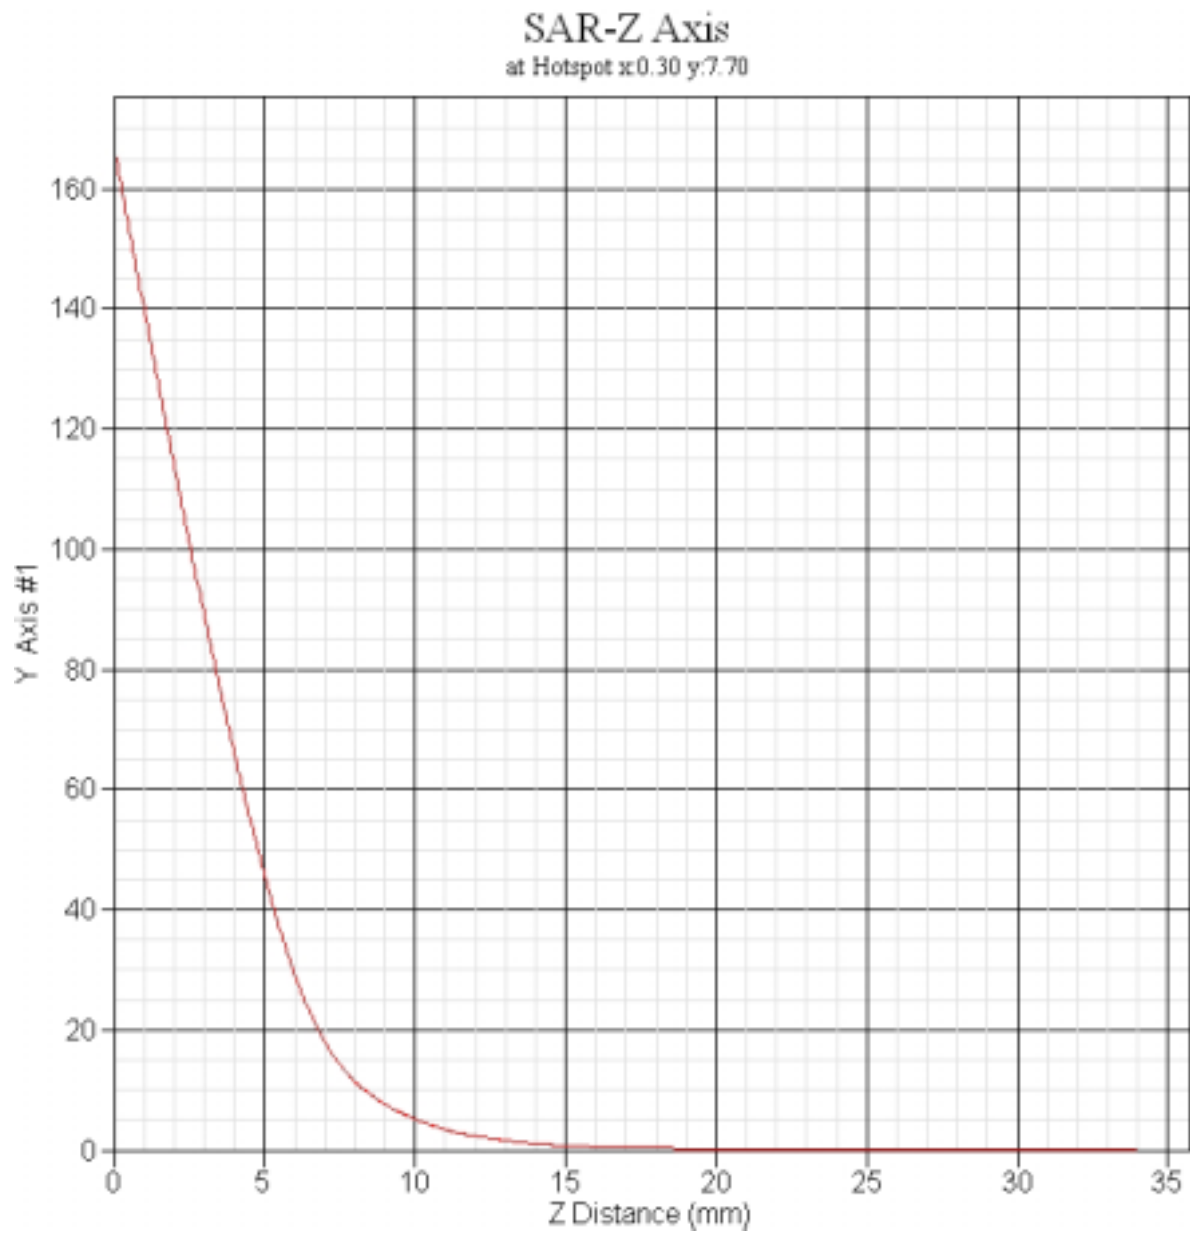

## 11. 2450MHz SAR measurement Data

### ALSAS-10U Ver 2.2.0 SAR Test Report

Validation date : 29-Aug-2005  
Measurement Date : 29-Aug-2005

#### Product Data

Device Name : PCMCIA CARDBUS  
Model : CB9  
Frequency : 2450 MHz  
Drift Time : 0 min(s)  
Length : 118 mm  
Width : 54 mm  
Depth : 8.8 mm  
Antenna Type : Internal

#### Phantom Data

Name : APREL-Uni  
Type : Uni-Phantom  
Size (mm) : 280 x 280 x 200  
Location : Center

#### Tissue Data

Type : BODY  
Serial No. : 2450B080F  
Frequency : 2450.00 MHz  
Last Calib. Date : 29-Aug-2005  
Temperature : 21.40 °C  
Ambient Temp. : 22.30 °C  
Humidity : 53.00 RH%  
Epsilon : 53.80 F/m  
Sigma : 1.91 S/m  
Density : 1000.00 kg/cu. m

#### Probe Data

Name : E-field Probe  
Model : ALS-E-020  
Type : E-Field Triangle  
Serial No. : 266  
Last Calib. Date : 16-Mar-2005  
Frequency : 2450.00 MHz  
Duty Cycle Factor: 1  
Conversion Factor: 5  
Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$   
Compression Point: 95.00 mV  
Offset : 1.56 mm

## 11.1 802.11b, Right Antenna


### 11.1.1 2412MHz, EUT Position: Bottom

Measurement Data

802.11b 2412MHz, Right Antenna

DUT Position : Bottom  
Channel : Low - 1  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.660 W/kg  
Power Drift-Finish : 0.670 W/kg  
Power Drift (%) : 1.515

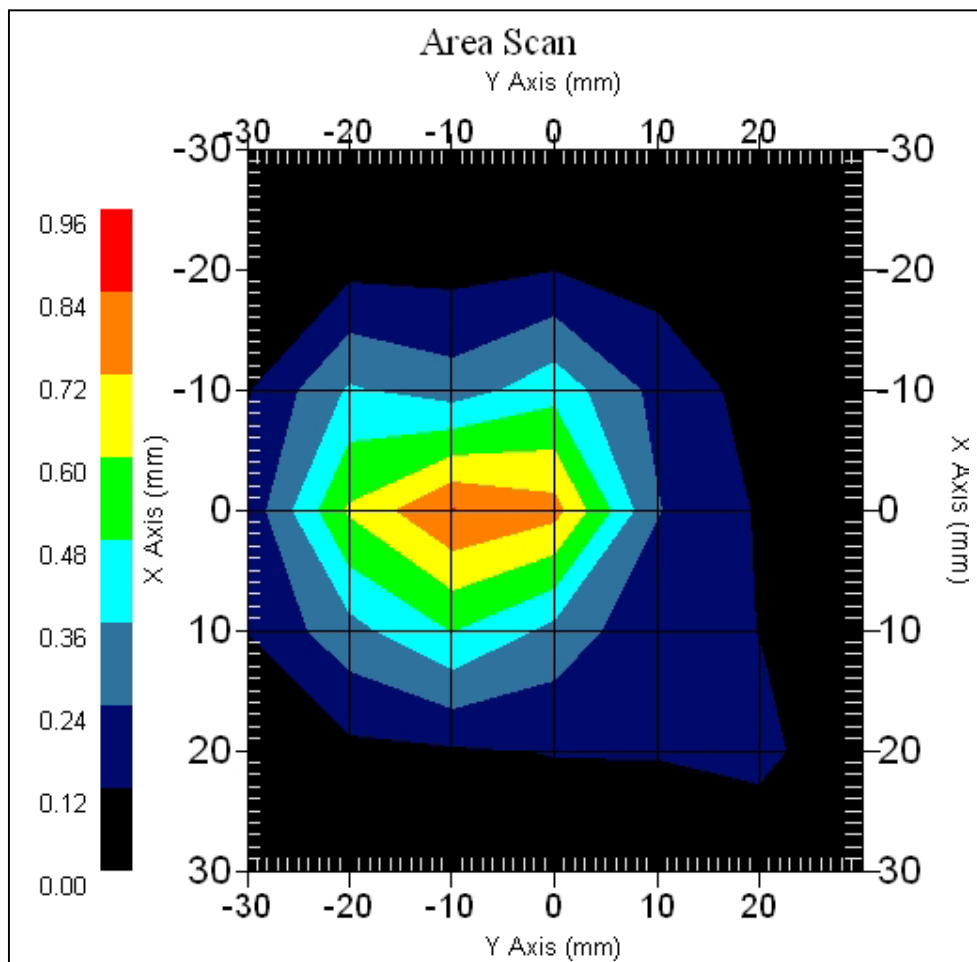

1 gram SAR value : 0.769 W/kg  
10 gram SAR value : 0.361 W/kg  
Area Scan Peak SAR : 0.843 W/kg  
Zoom Scan Peak SAR : 1.511 W/kg

### 11.1.2 2437MHz, EUT Position: Bottom

#### Measurement Data


802.11b 2437MHz, Right Antenna

DUT Position : Bottom  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.617 W/kg

Power Drift-Finish: 0.624 W/kg

Power Drift (%) : 0.999

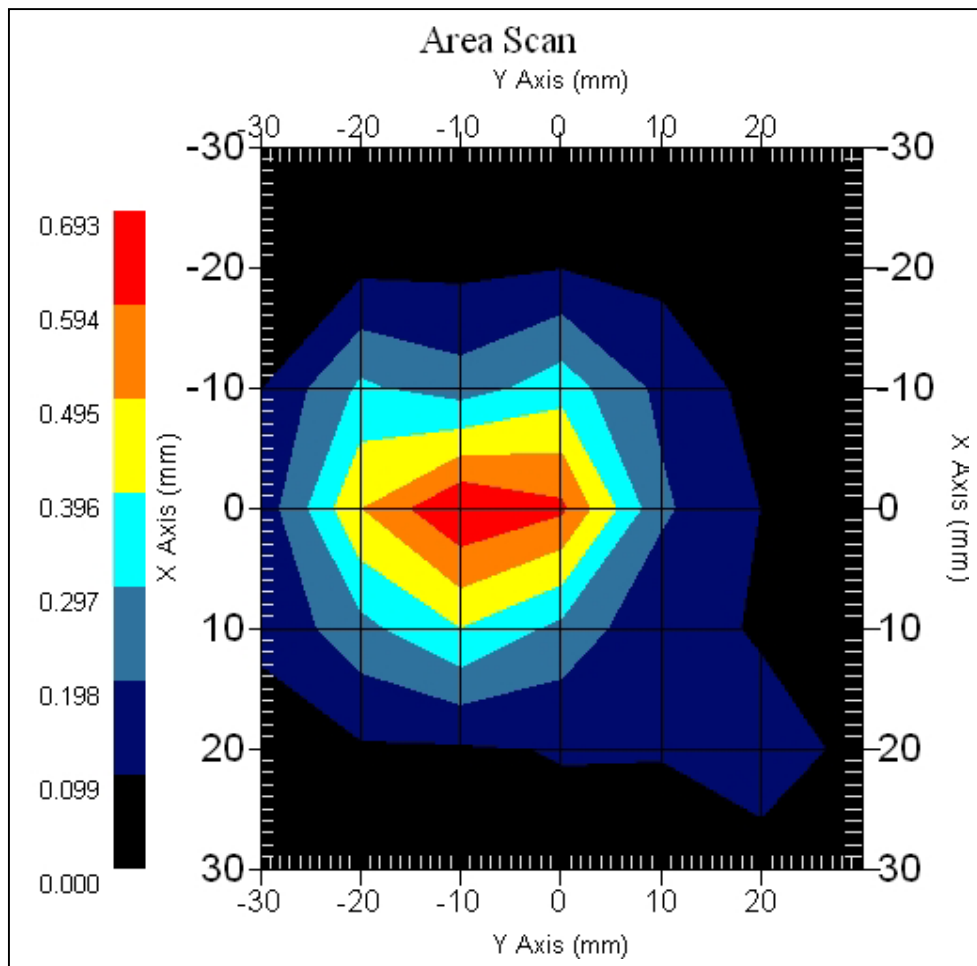

1 gram SAR value : 0.634 W/kg

10 gram SAR value : 0.297 W/kg

Area Scan Peak SAR : 0.690 W/kg

Zoom Scan Peak SAR : 1.211 W/kg

### 11.1.3 2462MHz, EUT Position: Bottom

#### Measurement Data


802.11b 2462MHz, Right Antenna

DUT Position : Bottom  
Channel : High - 11  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.439 W/kg

Power Drift-Finish: 0.425 W/kg

Power Drift (%) : -3.189

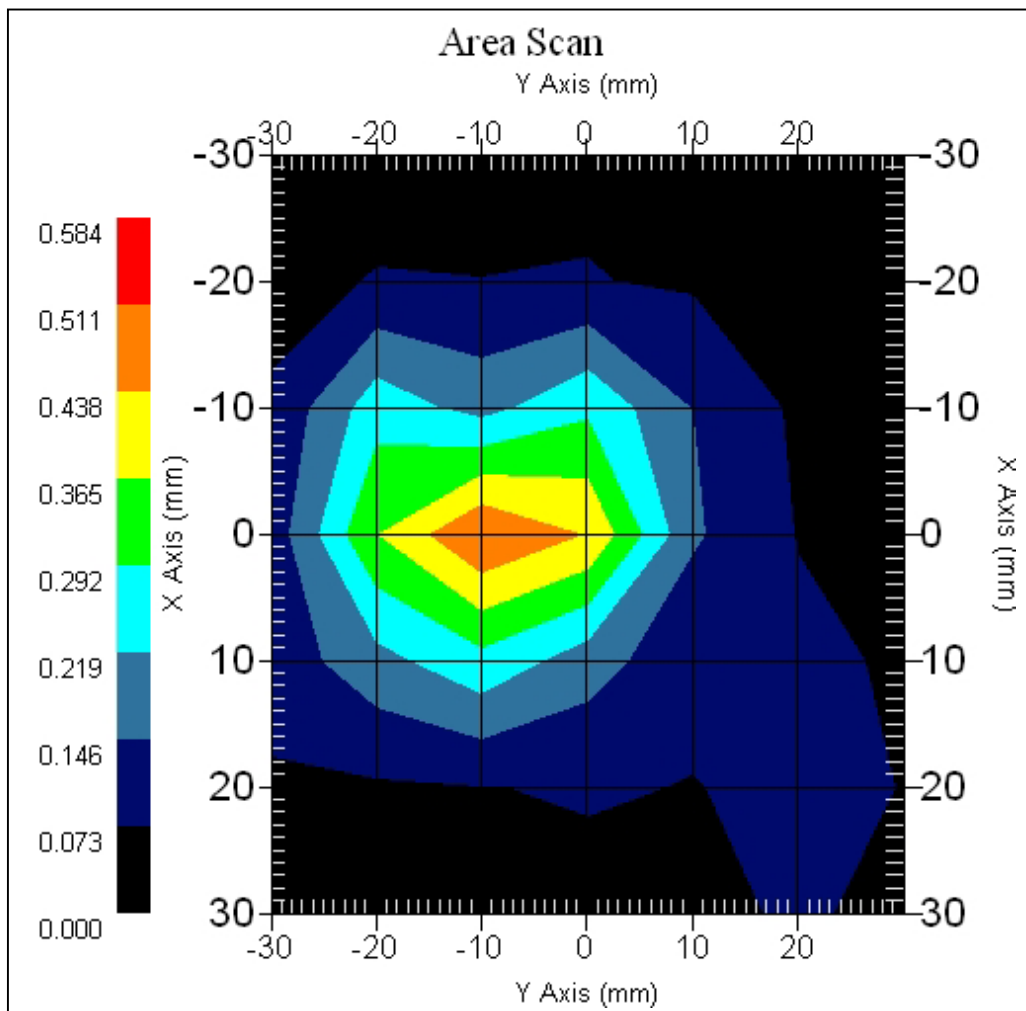

1 gram SAR value : 0.452 W/kg

10 gram SAR value : 0.213 W/kg

Area Scan Peak SAR : 0.512 W/kg

Zoom Scan Peak SAR : 0.920 W/kg

#### 11.1.4 2437MHz, EUT Position: Top

##### Measurement Data


802.11b 2437MHz, Right Antenna

DUT Position : Top  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x5x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.065 W/kg

Power Drift-Finish: 0.067 W/kg

Power Drift (%) : 3.077

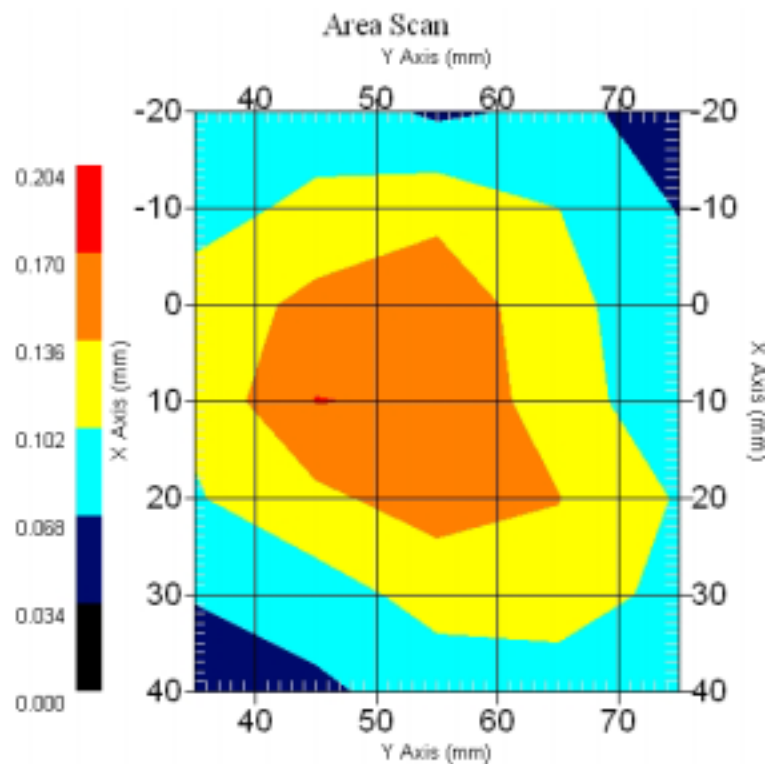

1 gram SAR value : 0.162 W/kg

10 gram SAR value : 0.107 W/kg

Area Scan Peak SAR : 0.171 W/kg

Zoom Scan Peak SAR : 0.270 W/kg

### 11.1.5 2437MHz, EUT Position: Front

#### Measurement Data


802.11b 2437MHz, Right Antenna

DUT Position : Front  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 5x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.218 W/kg

Power Drift-Finish: 0.209 W/kg

Power Drift (%) : -4.128

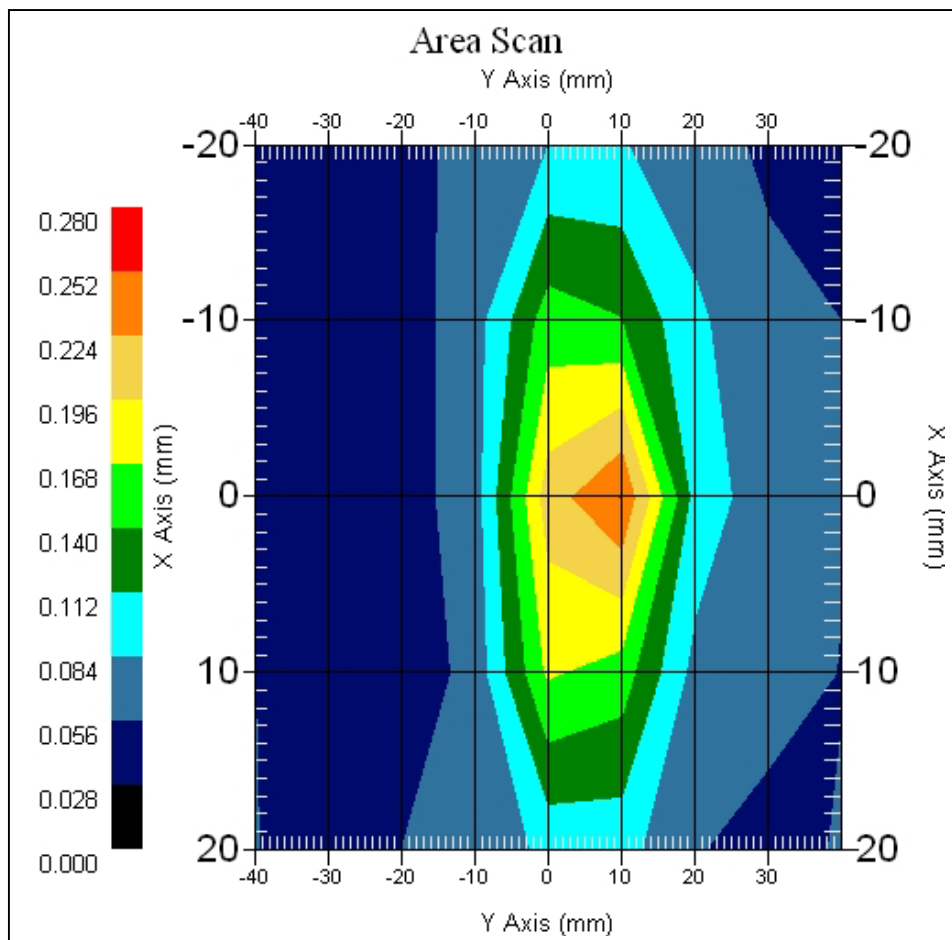

1 gram SAR value : 0.244 W/kg

10 gram SAR value : 0.124 W/kg

Area Scan Peak SAR : 0.253 W/kg

Zoom Scan Peak SAR : 0.480 W/kg

## 11.2 802.11b, Left Antenna

### 11.2.1 2412MHz, EUT Position: Bottom

#### Measurement Data


802.11b 2412MHz, Left Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Low - 1                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 5x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 5x5x8 : Measurement x=8mm, y=8mm, z=4mm   |

Power Drift-Start : 0.276 W/kg

Power Drift-Finish: 0.282 W/kg

Power Drift (%) : 2.174

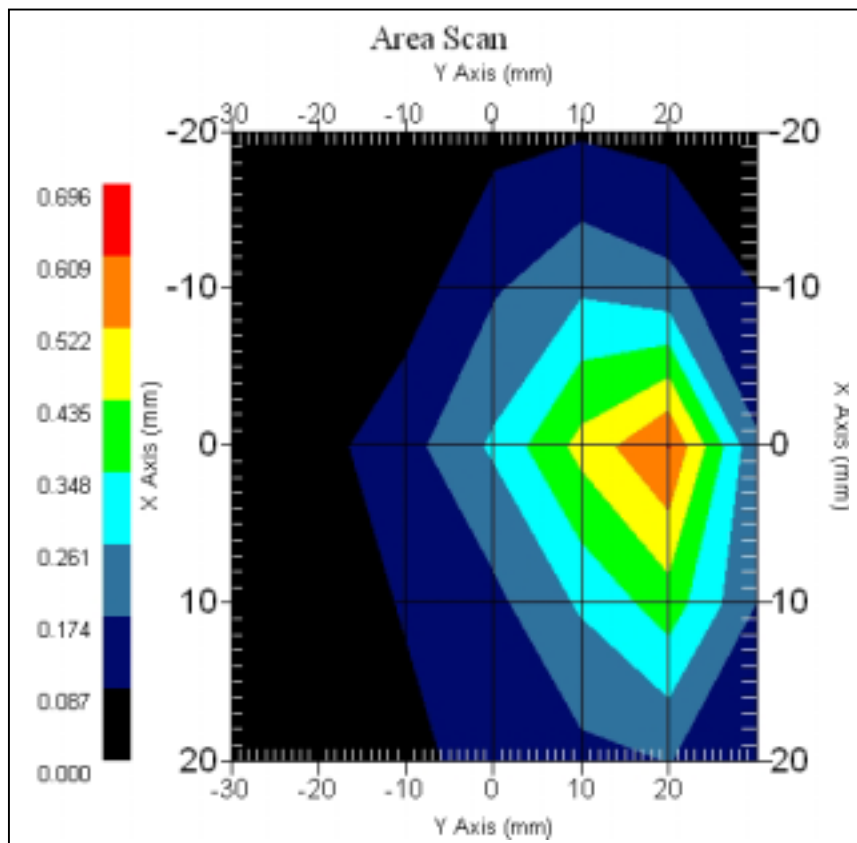

1 gram SAR value : 0.516 W/kg

10 gram SAR value : 0.242 W/kg

Area Scan Peak SAR : 0.612 W/kg

Zoom Scan Peak SAR : 1.131 W/kg

### 11.2.2 2437MHz, EUT Position: Bottom

#### Measurement Data


802.11b 2437MHz, Left Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Mid – 6                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 5x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 5x5x8 : Measurement x=8mm, y=8mm, z=4mm   |

Power Drift-Start : 0.246 W/kg

Power Drift-Finish: 0.245 W/kg

Power Drift (%) : -0.407

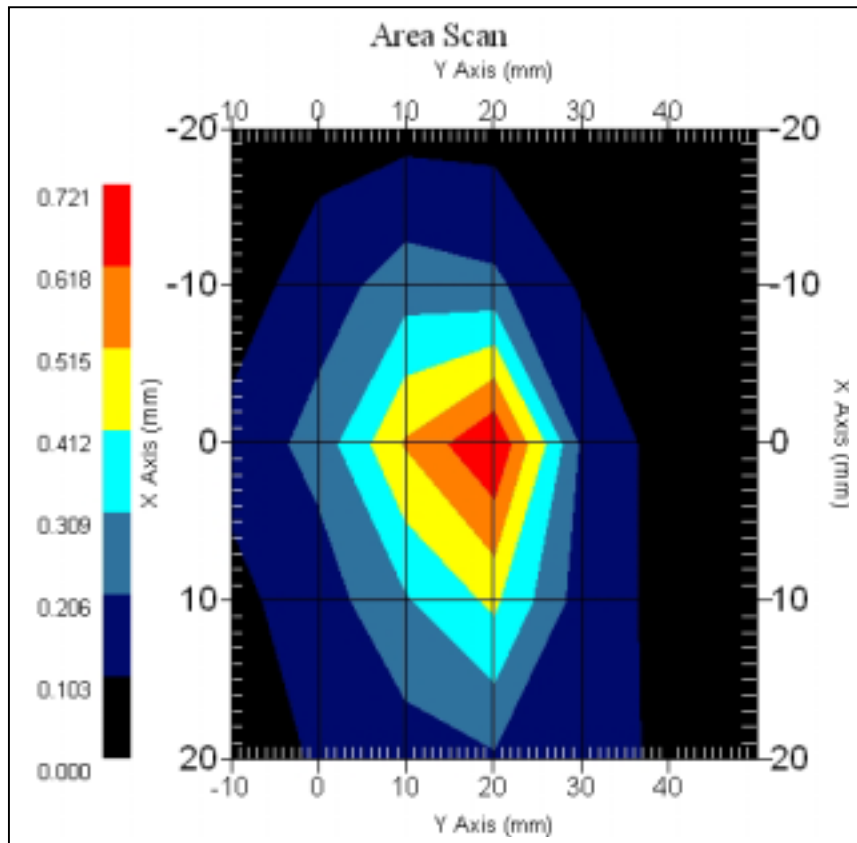

1 gram SAR value : 0.543 W/kg

10 gram SAR value : 0.254 W/kg

Area Scan Peak SAR : 0.718 W/kg

Zoom Scan Peak SAR : 1.181 W/kg

### 11.2.3 2462MHz, EUT Position: Bottom

#### Measurement Data


802.11b 2462MHz, Left Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | High – 11                                 |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 5x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 5x5x8 : Measurement x=8mm, y=8mm, z=4mm   |

Power Drift-Start : 0.198 W/kg

Power Drift-Finish: 0.191 W/kg

Power Drift (%) : -3.535

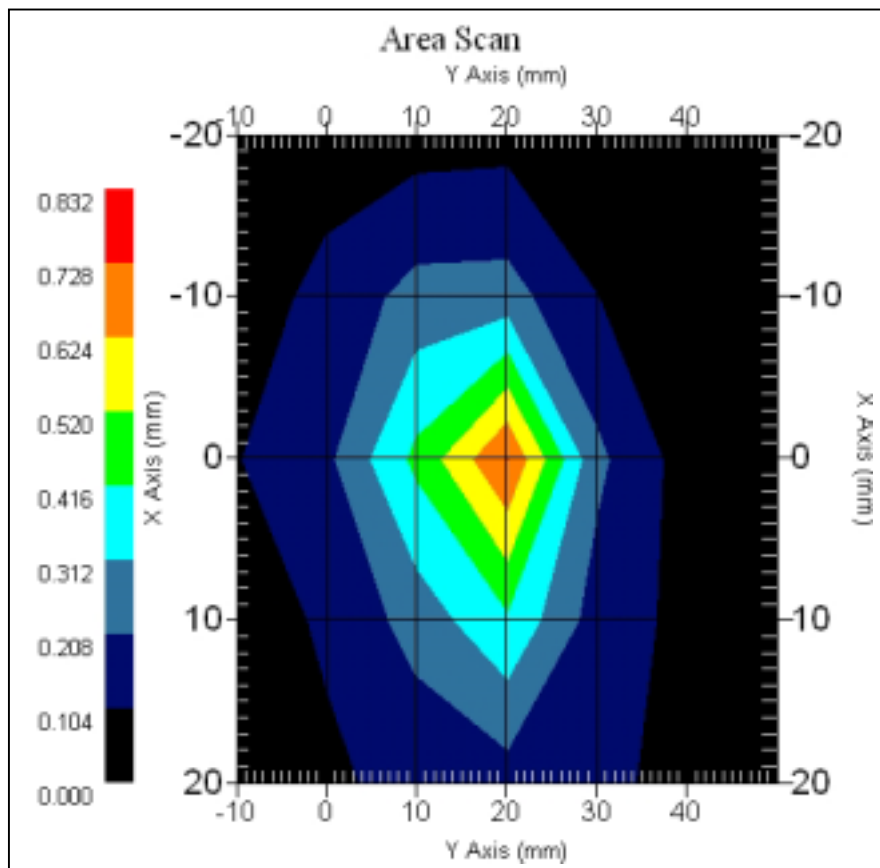

1 gram SAR value : 0.555 W/kg

10 gram SAR value : 0.248 W/kg

Area Scan Peak SAR : 0.730 W/kg

Zoom Scan Peak SAR : 1.251 W/kg

#### 11.2.4 2437MHz, EUT Position: Top

##### Measurement Data


802.11b 2437MHz, Left Antenna

DUT Position : Top  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.086 W/kg

Power Drift-Finish: 0.089 W/kg

Power Drift (%) : 3.459

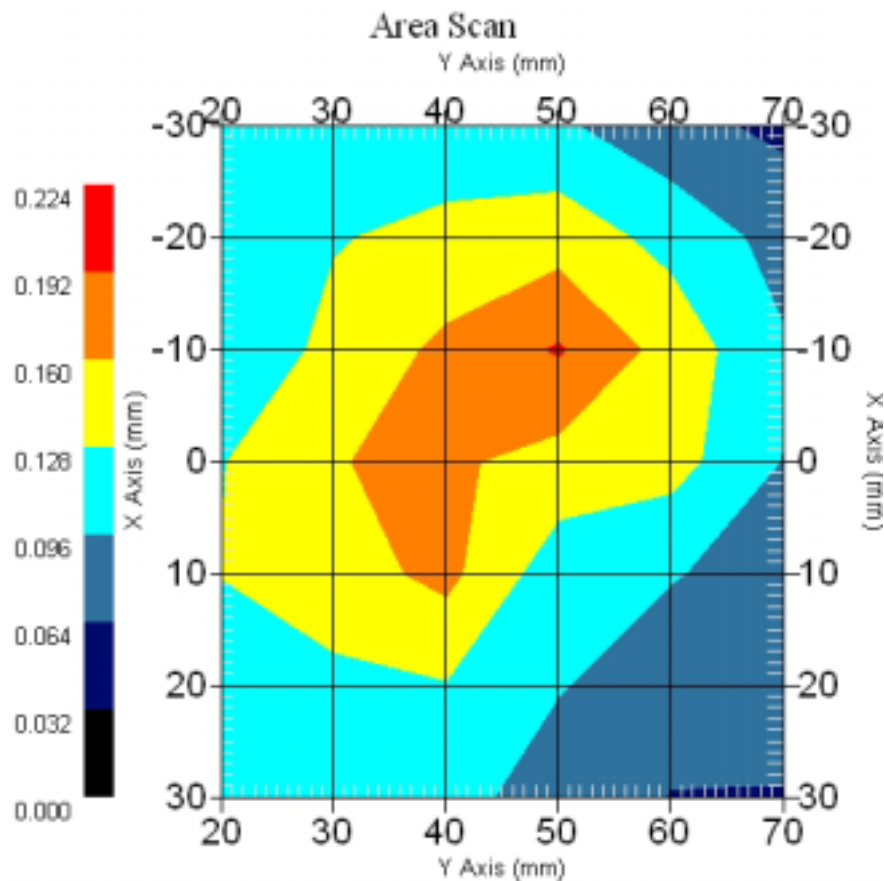

1 gram SAR value : 0.183 W/kg

10 gram SAR value : 0.120 W/kg

Area Scan Peak SAR : 0.195 W/kg

Zoom Scan Peak SAR : 0.320 W/kg

### 11.2.5 2437MHz, EUT Position: Front

#### Measurement Data


802.11b 2437MHz, Left Antenna

DUT Position : Bottom  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.192 W/kg

Power Drift-Finish: 0.200 W/kg

Power Drift (%) : 4.274

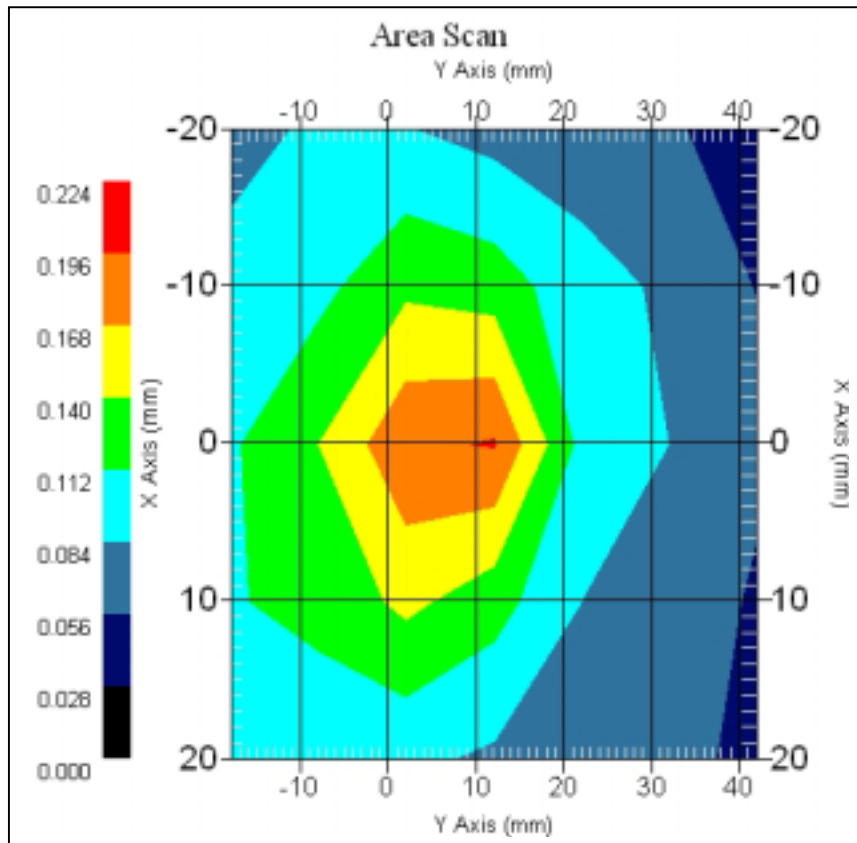

1 gram SAR value : 0.188 W/kg

10 gram SAR value : 0.108 W/kg

Area Scan Peak SAR : 0.198 W/kg

Zoom Scan Peak SAR : 0.390 W/kg

## 11.3 802.11g, Right Antenna

### 11.3.1 2412MHz, EUT Position: Bottom

Measurement Data


802.11g 2412MHz, Right Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Low - 1                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 7x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 7x7x7 : Measurement x=5mm, y=5mm, z=5mm   |

Power Drift-Start : 0.497 W/kg

Power Drift-Finish: 0.497 W/kg

Power Drift (%) : -0.052

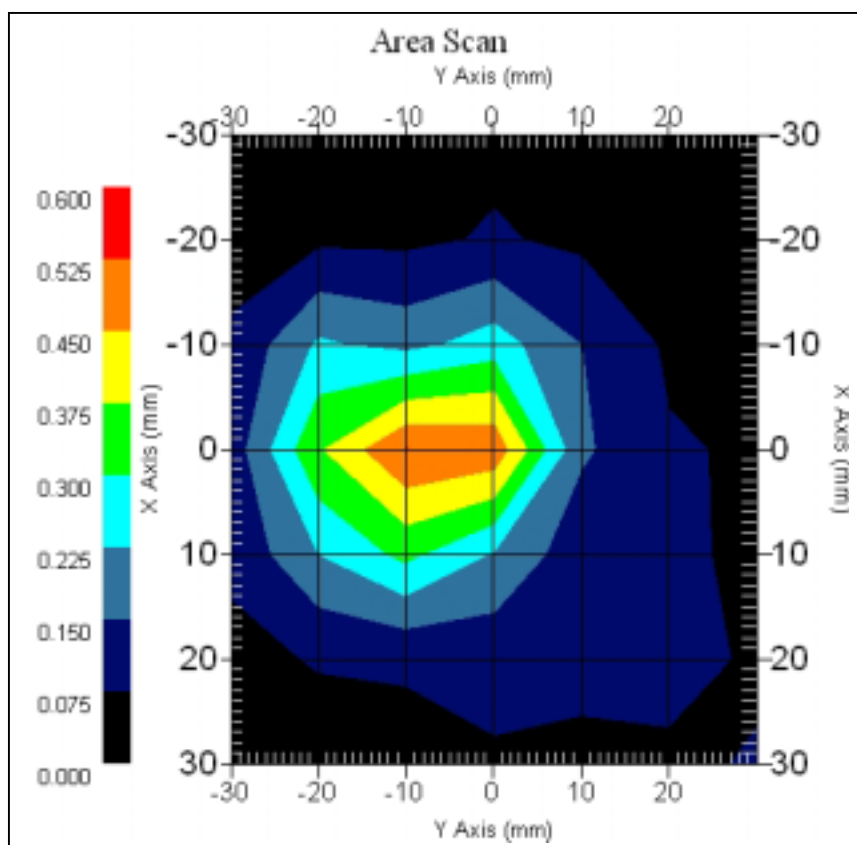

1 gram SAR value : 0.489 W/kg

10 gram SAR value : 0.237 W/kg

Area Scan Peak SAR : 0.526 W/kg

Zoom Scan Peak SAR : 0.950 W/kg

### 11.3.2 2437MHz, EUT Position: Bottom

#### Measurement Data


802.11g 2437MHz, Right Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Mid – 6                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 7x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 7x7x7 : Measurement x=5mm, y=5mm, z=5mm   |

Power Drift-Start : 0.376 W/kg

Power Drift-Finish: 0.369 W/kg

Power Drift (%) : -2.001

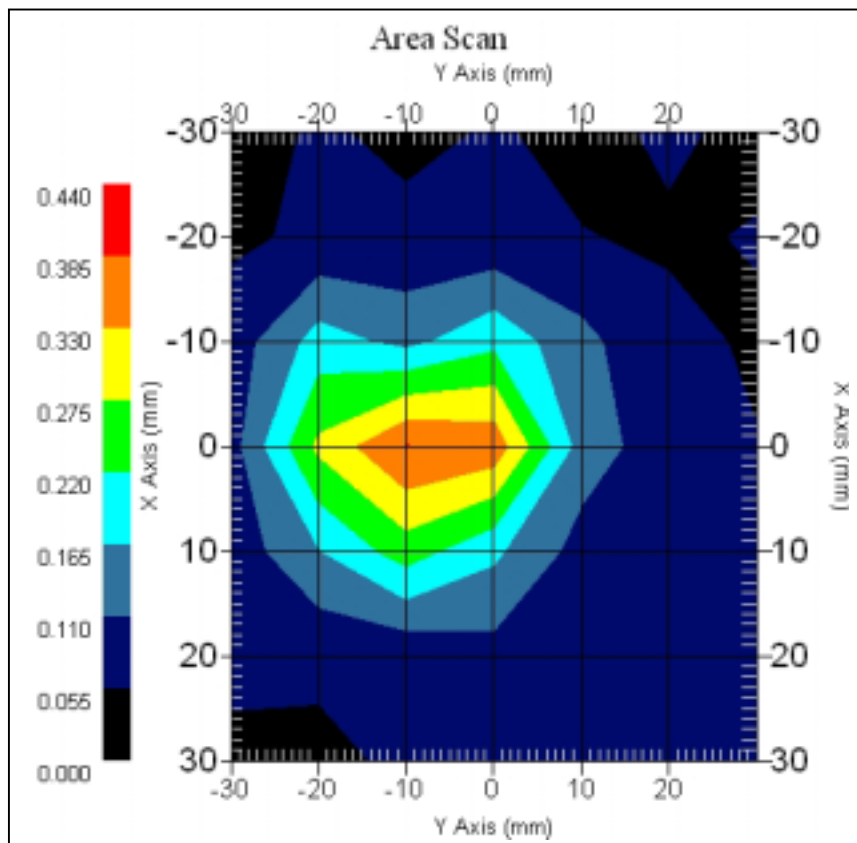

1 gram SAR value : 0.357 W/kg

10 gram SAR value : 0.178 W/kg

Area Scan Peak SAR : 0.387 W/kg

Zoom Scan Peak SAR : 0.650 W/kg

### 11.3.3 2462MHz, EUT Position: Bottom

#### Measurement Data


802.11g 2462MHz, Right Antenna

DUT Position : Bottom  
Channel : High – 11  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.258 W/kg

Power Drift-Finish: 0.261 W/kg

Power Drift (%) : 1.365

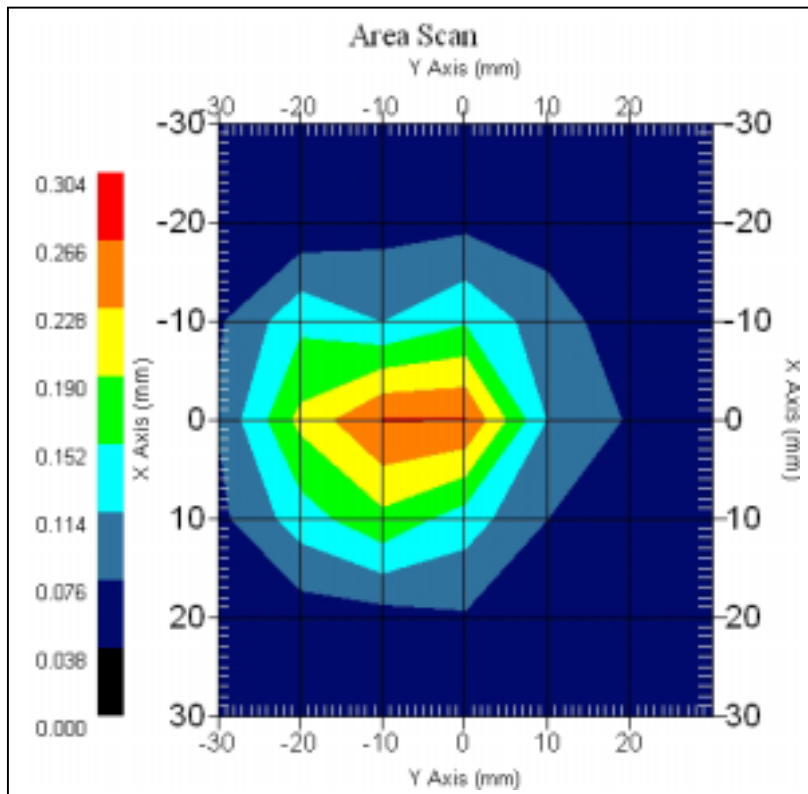

1 gram SAR value : 0.249 W/kg

10 gram SAR value : 0.133 W/kg

Area Scan Peak SAR : 0.268 W/kg

Zoom Scan Peak SAR : 0.430 W/kg

#### 11.3.4 2437MHz, EUT Position: Top

##### Measurement Data


802.11g 2437MHz, Right Antenna

DUT Position : Top  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.068 W/kg

Power Drift-Finish: 0.066 W/kg

Power Drift (%) : -2.941

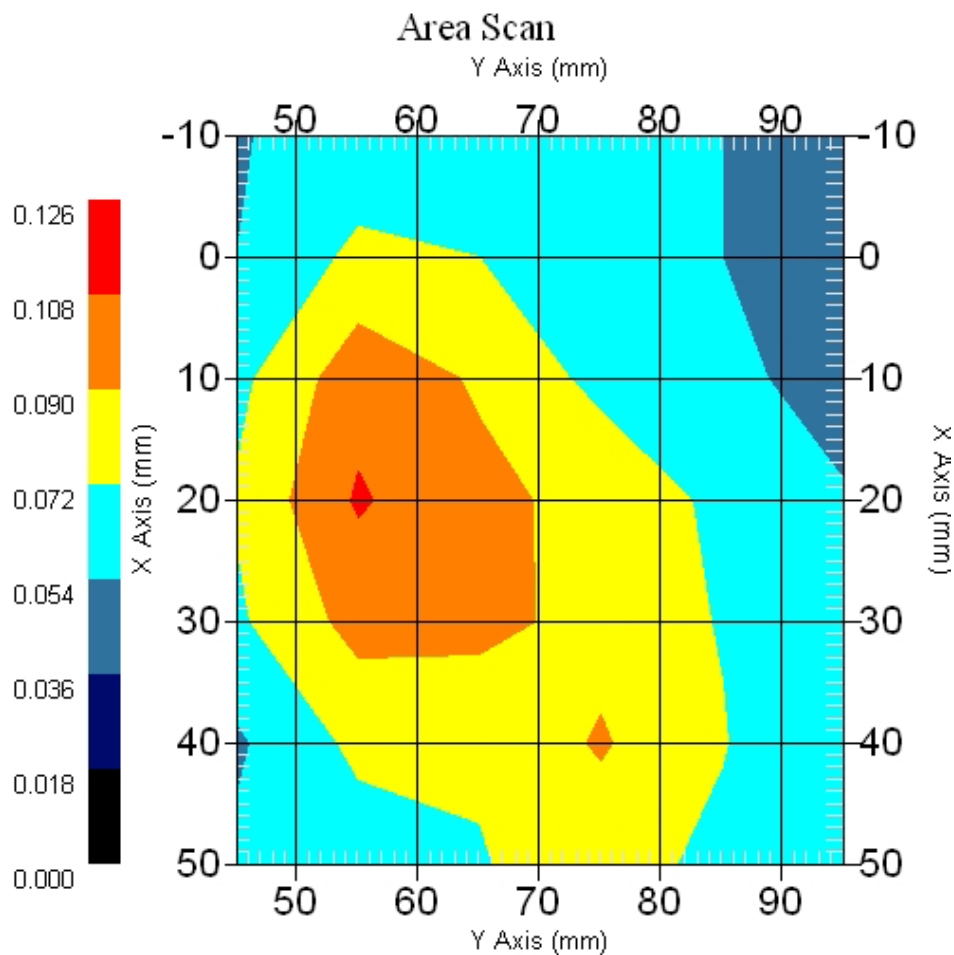

1 gram SAR value : 0.099 W/kg

10 gram SAR value : 0.073 W/kg

Area Scan Peak SAR : 0.110 W/kg

Zoom Scan Peak SAR : 0.130 W/kg

### 11.3.5 2437MHz, EUT Position: Front

#### Measurement Data


802.11g 2437MHz, Right Antenna

DUT Position : Front  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 5x9x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 0.155 W/kg

Power Drift-Finish: 0.161 W/kg

Power Drift (%) : 3.864

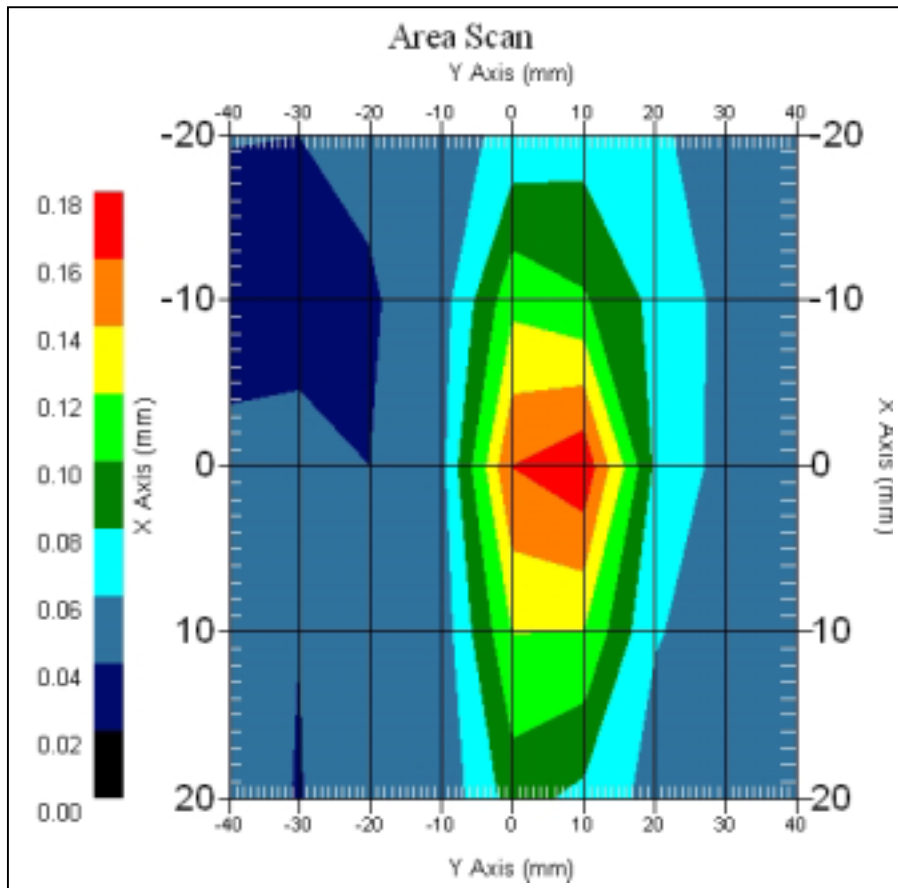

1 gram SAR value : 0.166 W/kg

10 gram SAR value : 0.094 W/kg

Area Scan Peak SAR : 0.176 W/kg

Zoom Scan Peak SAR : 0.320 W/kg

## 11.4 802.11g, Left Antenna

### 11.4.1 2412MHz, EUT Position: Bottom

#### Measurement Data


802.11g 2412MHz, Left Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Low - 1                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 5x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 5x5x8 : Measurement x=8mm, y=8mm, z=4mm   |

Power Drift-Start : 0.224 W/kg

Power Drift-Finish: 0.219 W/kg

Power Drift (%) : -2.232

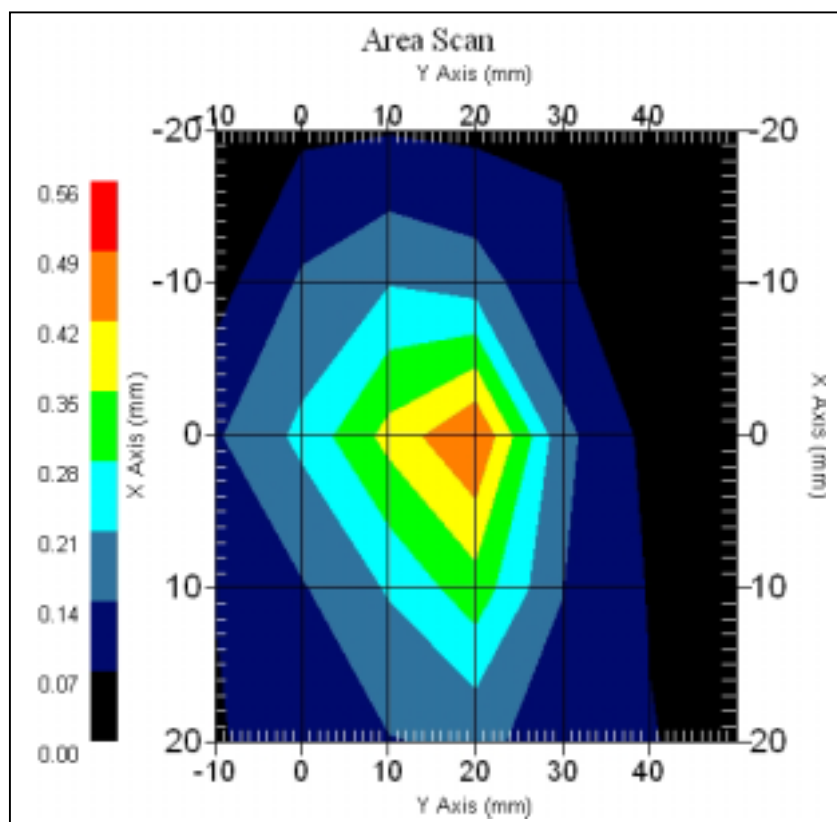

1 gram SAR value : 0.437 W/kg

10 gram SAR value : 0.211 W/kg

Area Scan Peak SAR : 0.492 W/kg

Zoom Scan Peak SAR : 0.945 W/kg

### 11.4.2 2437MHz, EUT Position: Bottom

#### Measurement Data


802.11g 2437MHz, Left Antenna

|               |   |                                           |
|---------------|---|-------------------------------------------|
| DUT Position  | : | Bottom                                    |
| Channel       | : | Mid – 6                                   |
| Crest Factor  | : | 1                                         |
| Tissue Temp.  | : | 21.40 °C                                  |
| Ambient Temp. | : | 22.30 °C                                  |
| Area Scan     | : | 5x7x1 : Measurement x=10mm, y=10mm, z=4mm |
| Zoom Scan     | : | 5x5x8 : Measurement x=8mm, y=8mm, z=4mm   |

Power Drift-Start : 0.172 W/kg

Power Drift-Finish: 0.177 W/kg

Power Drift (%) : 2.907

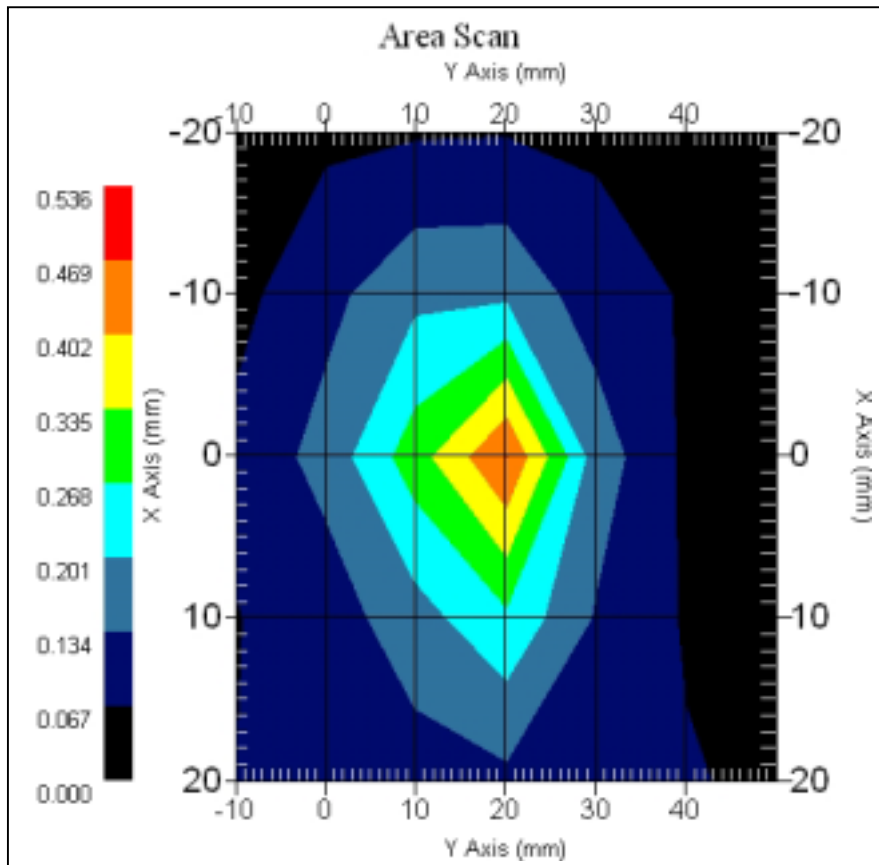

1 gram SAR value : 0.425 W/kg

10 gram SAR value : 0.200 W/kg

Area Scan Peak SAR : 0.470 W/kg

Zoom Scan Peak SAR : 0.920 W/kg

### 11.4.3 2462MHz, EUT Position: Bottom

#### Measurement Data


802.11g 2462MHz, Left Antenna

DUT Position : Bottom  
Channel : High – 11  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.182 W/kg

Power Drift-Finish: 0.185 W/kg

Power Drift (%) : 2.113

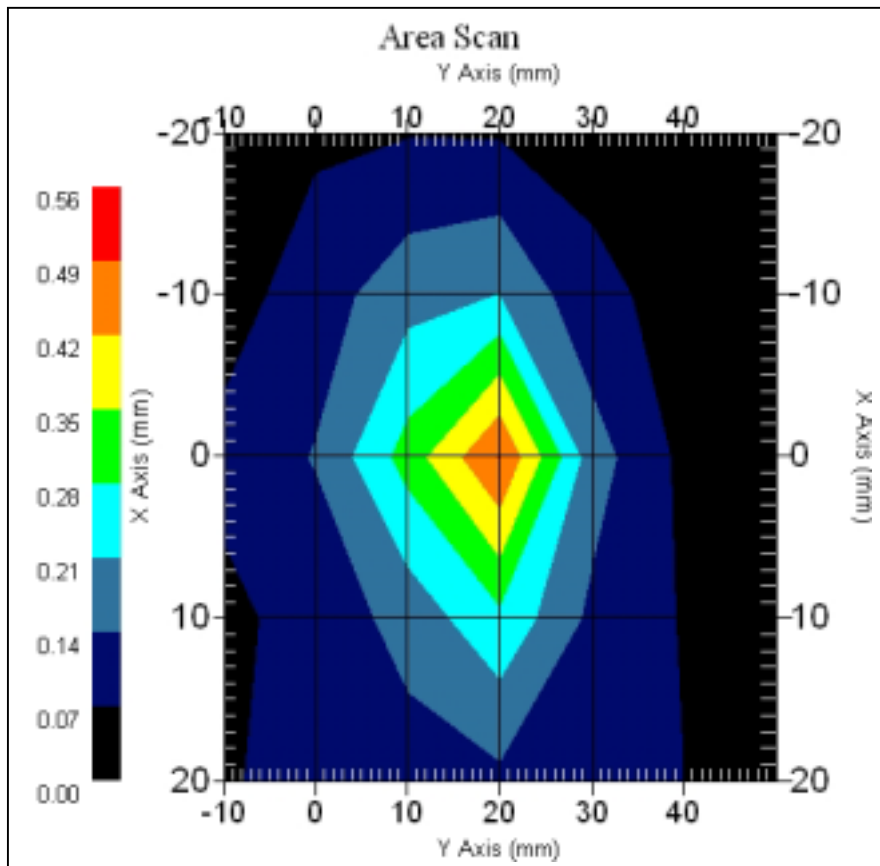

1 gram SAR value : 0.397 W/kg

10 gram SAR value : 0.169 W/kg

Area Scan Peak SAR : 0.492 W/kg

Zoom Scan Peak SAR : 0.960 W/kg

#### 11.4.4 2437MHz, EUT Position: Top

##### Measurement Data


802.11g 2437MHz, Left Antenna

DUT Position : Top  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 7x6x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.076 W/kg

Power Drift-Finish: 0.079 W/kg

Power Drift (%) : 3.176

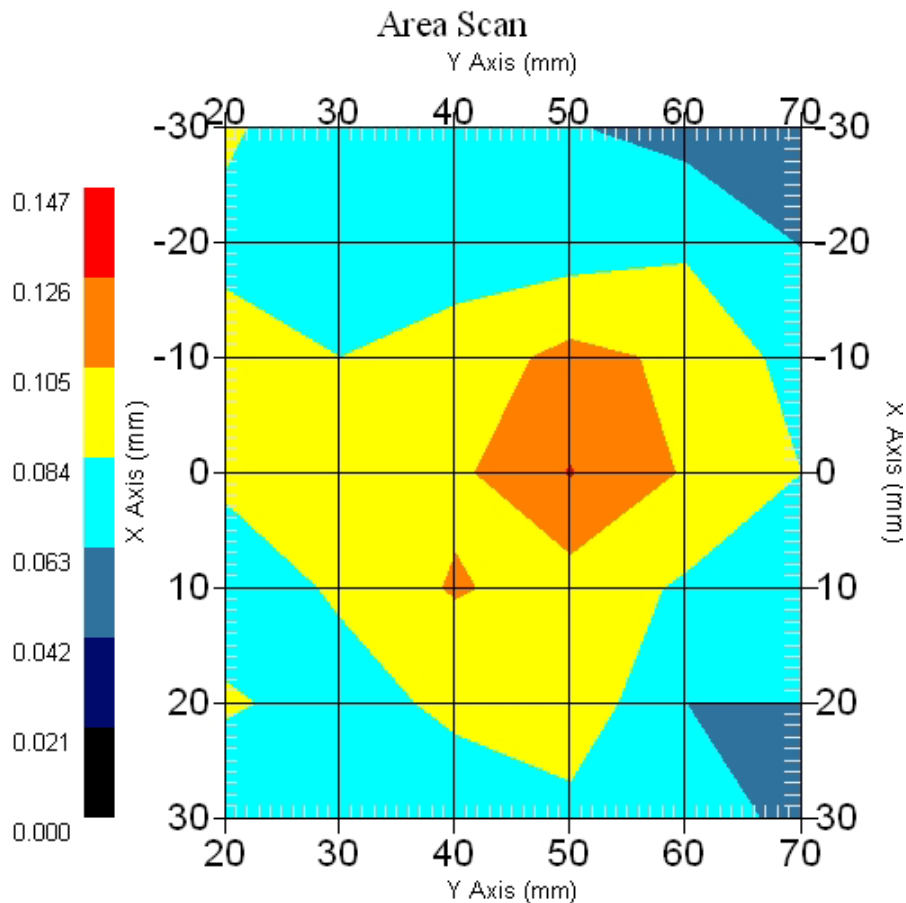

1 gram SAR value : 0.108 W/kg

10 gram SAR value : 0.078 W/kg

Area Scan Peak SAR : 0.127 W/kg

Zoom Scan Peak SAR : 0.170 W/kg

#### 11.4.5 2437MHz, EUT Position: Front

##### Measurement Data


802.11g 2437MHz, Left Antenna

DUT Position : Bottom  
Channel : Mid – 6  
Crest Factor : 1  
Tissue Temp. : 21.40 °C  
Ambient Temp. : 22.30 °C  
Area Scan : 5x7x1 : Measurement x=10mm, y=10mm, z=4mm  
Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm, z=4mm

Power Drift-Start : 0.126 W/kg

Power Drift-Finish: 0.128 W/kg

Power Drift (%) : 1.587

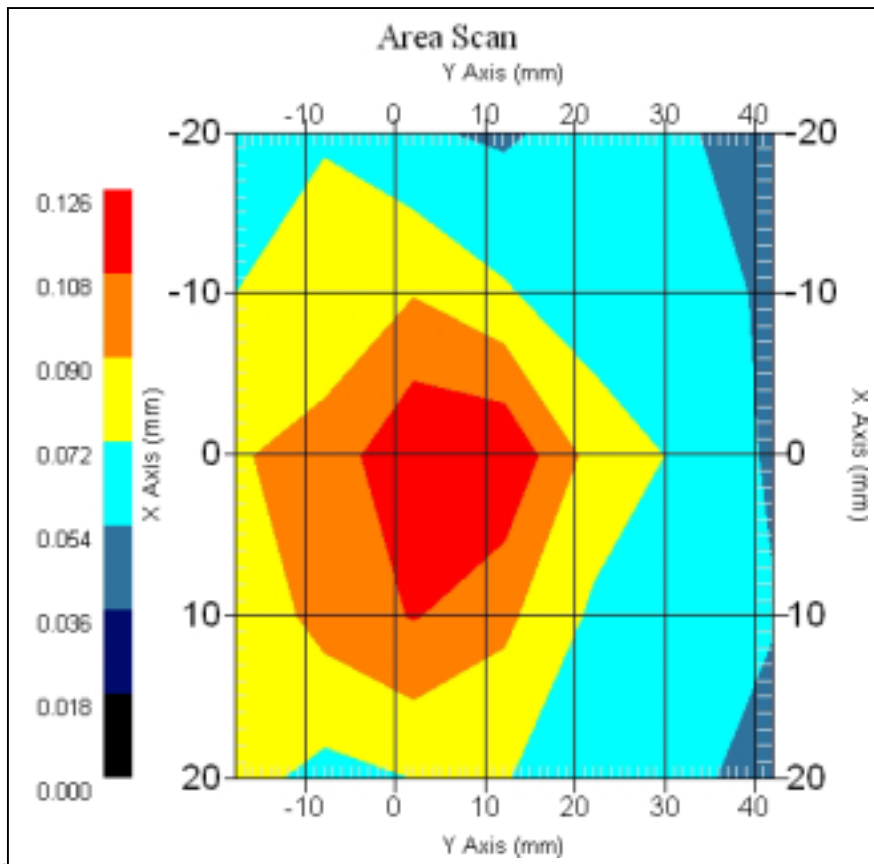

1 gram SAR value : 0.125 W/kg


10 gram SAR value : 0.083 W/kg

Area Scan Peak SAR : 0.124 W/kg


Zoom Scan Peak SAR : 0.200 W/kg

## 11.5 2450MHz Z-Axis plot

### 11.5.1 Frequency: 802.11b 2412MHz, EUT Bottom (Right Antenna)

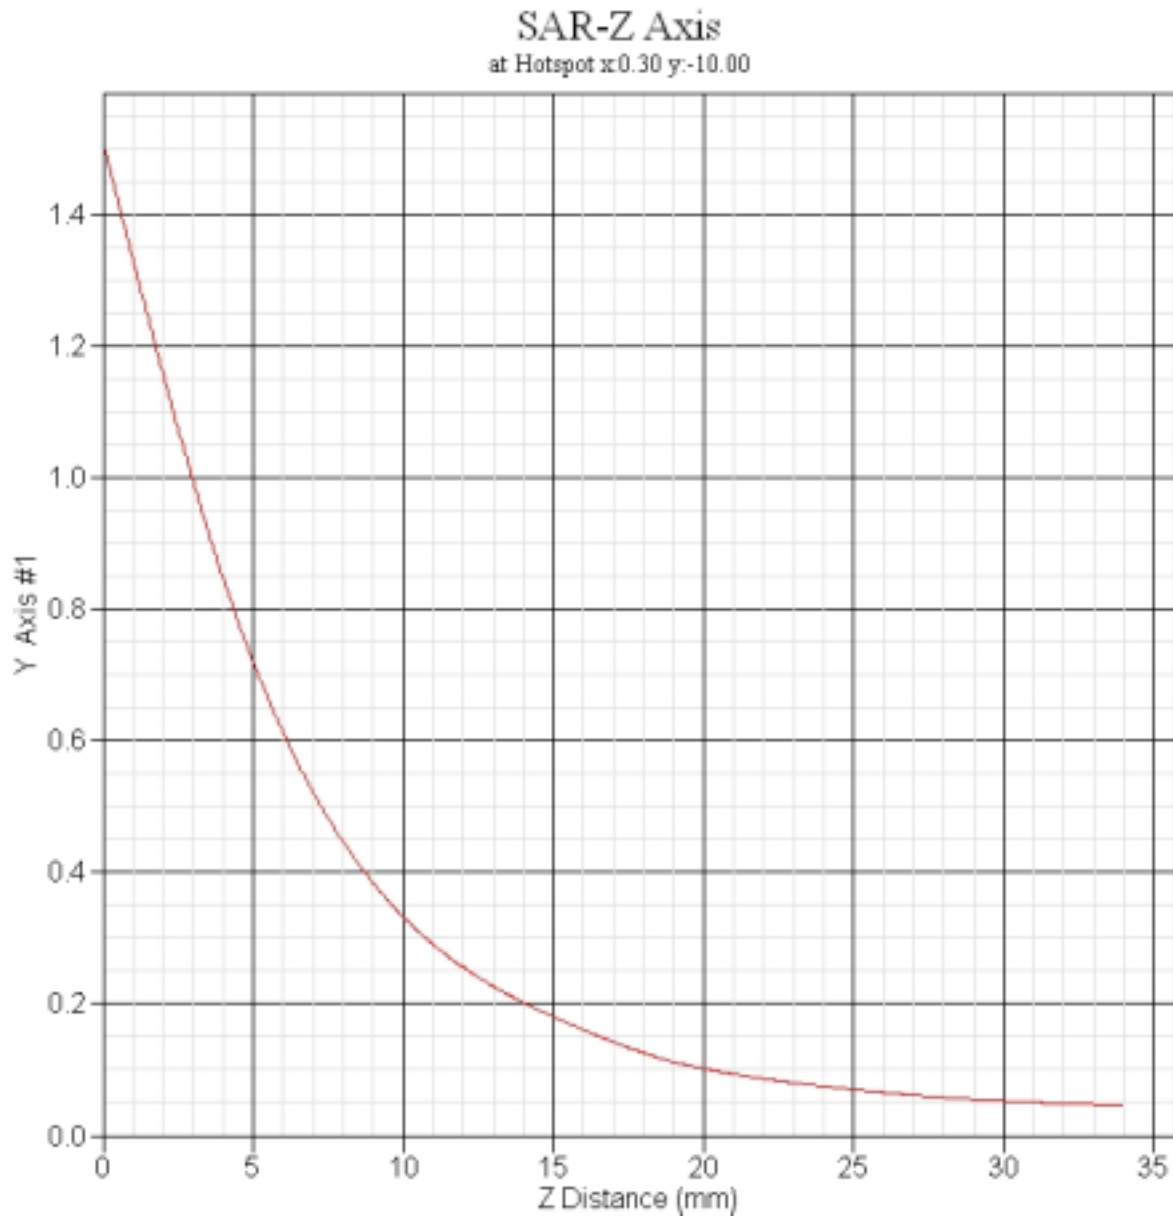

### 11.5.2 Frequency: 802.11g 2412MHz, EUT Bottom (Right Antenna)

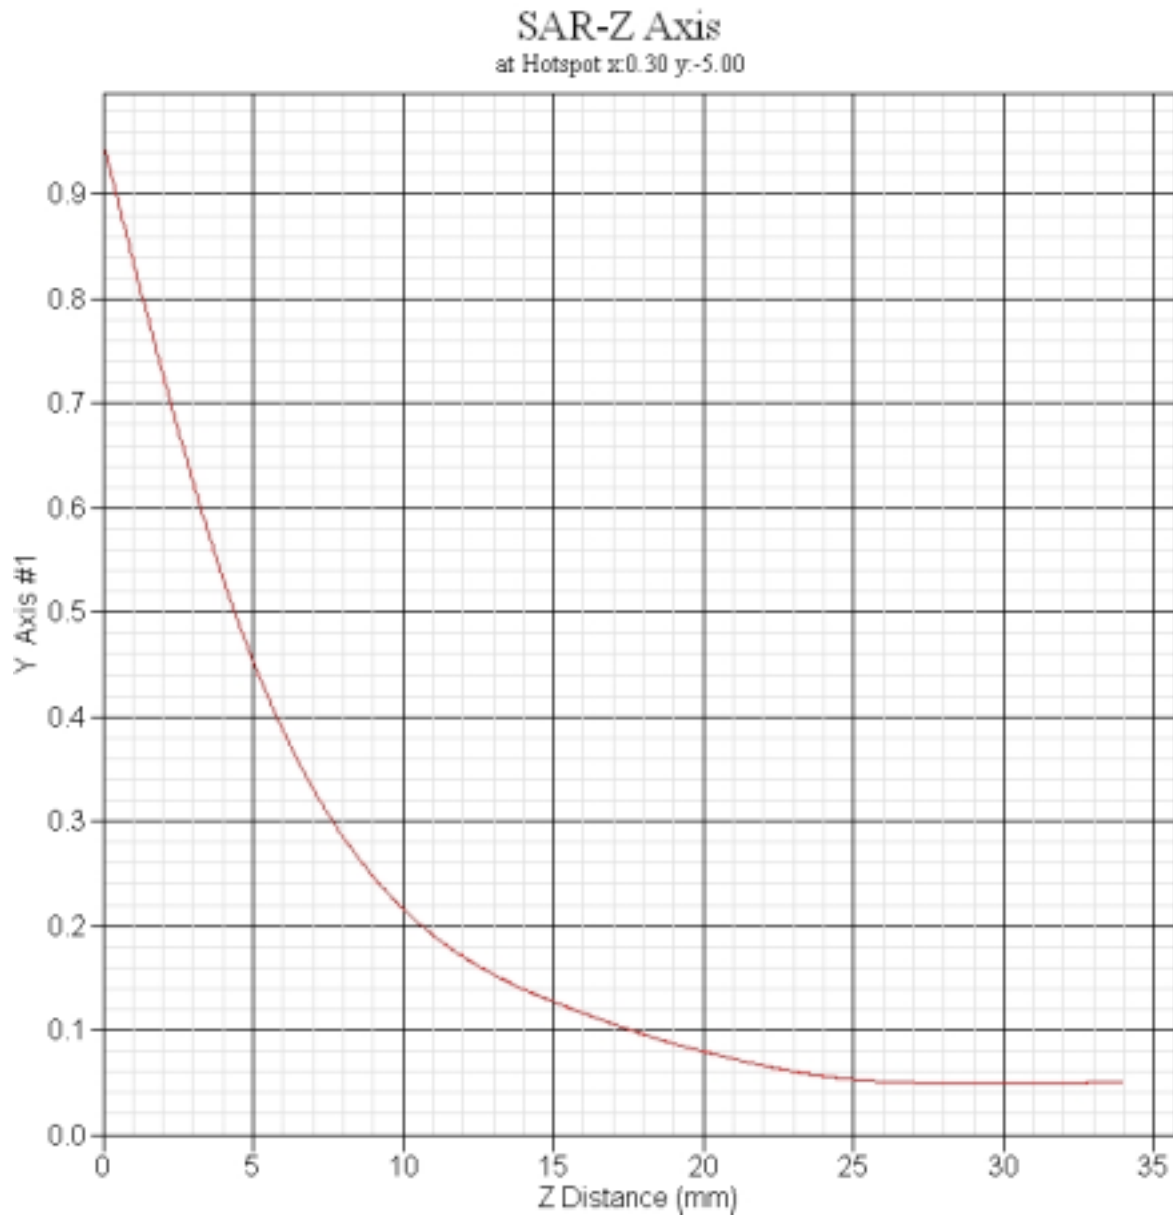

## 12. 5200 MHz SAR measurement Data

### ALSAS-10U Ver 2.2.0 SAR Test Report

Validation date : 30-Aug-2005

Measurement Date : 30-Aug-2005

#### Product Data

Device Name : PCMCIA CARDBUS

Model : CB9

Frequency : 5200 MHz

Drift Time : 0 min(s)

Length : 118 mm

Width : 54 mm

Depth : 8.8 mm

Antenna Type : Internal

#### Phantom Data

Name : APREL-Uni

Type : Uni-Phantom

Size (mm) : 280 x 280 x 200

Location : Center

#### Tissue Data

Type : BODY

Serial No. : 5200B0816

Frequency : 5200.00 MHz

Last Calib. Date : 30-Aug-2005

Temperature : 21.90 °C

Ambient Temp. : 22.80 °C

Humidity : 58.00 RH%

Epsilon : 41.83 F/m

Sigma : 5.401 S/m

Density : 1000.00 kg/cu. m

#### Probe Data

Name : E-field Probe

Model : ALS-E-020

Type : E-Field Triangle

Serial No. : 266

Last Calib. Date : 16-Mar-2005

Frequency : 5200.00 MHz

Duty Cycle Factor: 1

Conversion Factor: 4.4

Probe Sensitivity: 1.20 1.20 1.20  $\mu\text{V}/(\text{V}/\text{m})^2$

Compression Point: 95.00 mV

Offset : 1.56 mm