




AP240-E

ETHERNET ACCESS POINT

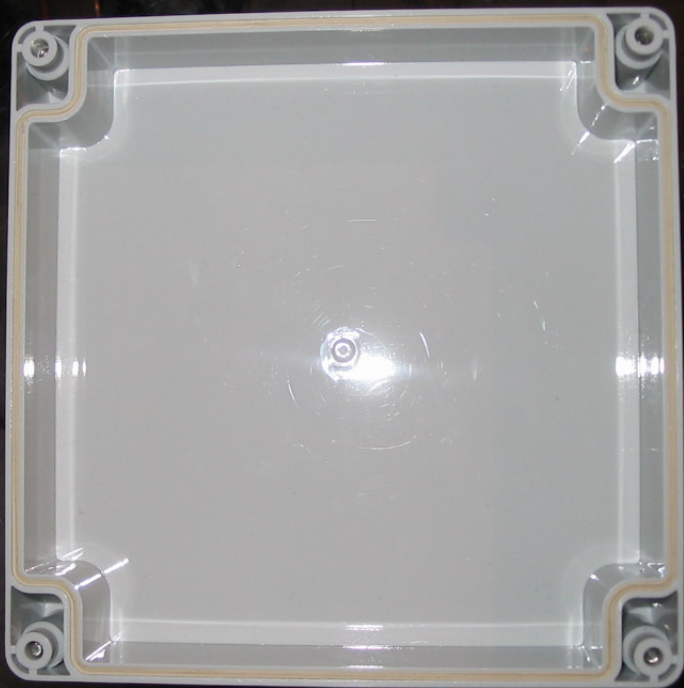

electrically connected to other power sources.
power to the NMEA 2000 Bus, the supply must
1 Network Power Supply. This includes the

should be carried in twisted pair wires and shall be
the same current components supplied to the node

power rating for each connector
network installations. One Network
device taking 51 mA from the network

er shall not introduce noise, ripple
levels allowed by Section 9.2 Co

CHz conducted emissions shall

able manage voltage transients
ing.

thin 2 milliseconds and if interrupted
shall be no

communications or in-process

30 20 20

its
more

Out



October 2004

network power shall not introduce
excess of levels allowed by Secti

than 10KHz conducted emission

urbances

shall be able manage voltage tra
the following.

d within 2 milliseconds and if it
there shall be no

ork communications or in-proc

