


1. DESCRIPTION: SERIALIZED BAR CODE LABEL.
2. MATERIAL: 2 MIL POLYIMIDE, TYPE TS866.
3. DIGITAL INKING SYSTEM FOR TEXT & BAR CODE TO BE PERMANENT BLACK, U.V. RESISTANT.
4. ARTWORK LAYOUT TO BE LOCATED AS SHOWN, AND TO BE APPROVED BY HUNT ENGINEERING.
5. 10 DIGIT SERIAL NO. TO BE IMPRINTED IN HUMAN READABLE FORM BELOW THE SAME INFORMATION IN CODE 128C OR CODE 39 BAR CODE AS SHOWN. THE CODE 128 OR CODE 39 CONSISTS OF A 2 D TYPE (05) FOLLOWED BY AN 8 DIGIT I.D. S/N WITH NO SPACES (BAR CODE HEIGHT TO BE .150MIN). THE BAR CODE CAN RUN OFF THE BOTTOM OF THE LABEL.
6. FCC I.D. NUMBER TO BE LISTED ACROSS THE TOP OF THE LABEL.
7. HUNT PRODUCT NAME AND REV LISTED AS SHOWN.
8. LABEL MANUFACTURER:
WHEN EACH PURCHASE ORDER IS COMPLETED, PROVIDE THE VERIFIED RANGE & DATE COMPLETED TO HUNT TECHNOLOGIES MANUFACTURING ENGINEER OR PURCHASING.
9. -DELETED-
10. -DELETED-
11. NARROW BAR IS 10 MIL.
12. THIS LABEL SHALL BE PRINTED BY GE, AND GET PLACED ON THE OUTSIDE OF THE METER. I.D. WILL MATCH THE I.D. OF THE AIRPOINT MODULE THAT IS INSTALLED WITHIN.

NOTICE
THIS DOCUMENT CONTAINS INFORMATION
PROPRIETARY TO HUNT TECHNOLOGIES INC.
ANY USE OR DISCLOSURE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

REVISIONS							
DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
01	3362	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-	-

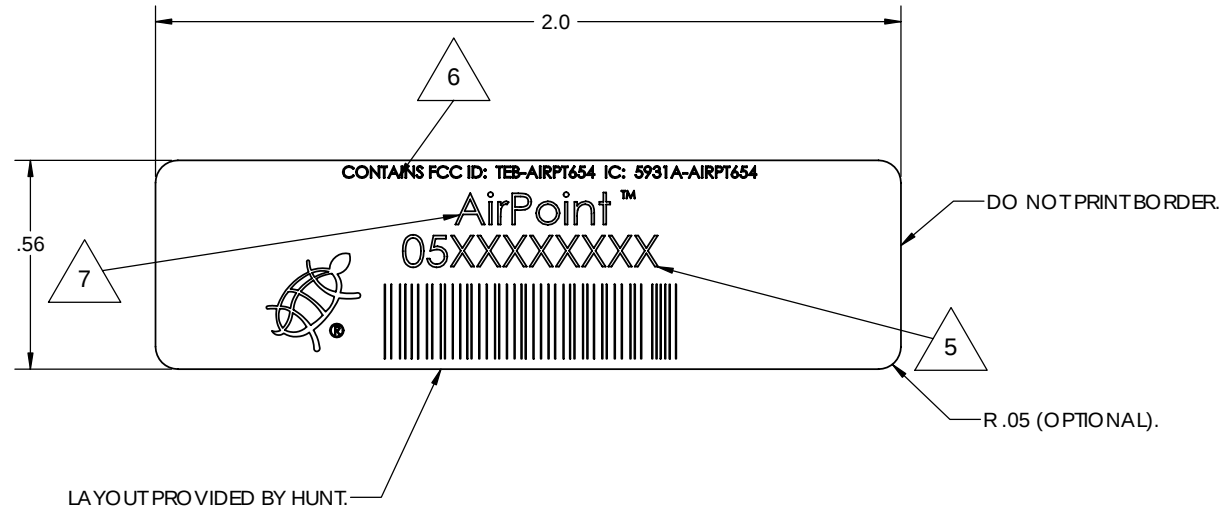

UNCONTROLLED

DO NOT SCALE DRAWING	CHECKED BY:	-	DATED:	-	COMPANY:					
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TO REFERENCE ON: DECIMAL FRACTION ANGLE 2 PL ? .03 ? 1/64 ? 1" 3 PL ? .15 MUST BE FREE FROM FLASH AND BURRS BREAK ALL SHARP EDGES () DENOTES REFERENCE ONLY.	INITIATOR:	-	DATED:	-	HUNT TECHNOLOGIES, INC. PEQUOT LAKES, MN 56472					
	QUALITY ASSURANCE:	-	DATED:	-						
	MANUFACTURING:	-	DATED:	-	TITLE:					
	DRAWN BY:	S O'BRYAN	DATED:	01/18/06	PART NO.					
					DWG. NO.		DATED:	SCALE:	SIZE:	SHEET:
					LABL-00186		01/18/06	NONE	B	1 OF 1