


NOTES:

1. DESCRIPTION: SERIALIZED BAR CODE LABEL..
2. MATERIAL: 2 MIL POLYIMIDE, TYPE TS866.
3. DIGITAL INKING SYSTEM FOR TEXT & BAR CODE TO BE PERMANENT BLACK, U.V. RESISTANT.
4. ARTWORK LAYOUT TO BE LOCATED AS SHOWN, AND TO BE APPROVED BY HUNT ENGINEERING.
5. 10 DIGIT SERIAL NO. TO BE IMPRINTED IN HUMAN READABLE FORM. BELOW THE SAME INFORMATION IN CODE 128C BAR CODE AS SHOWN. THE CODE 128 CONSISTS OF A 2 DIGIT ERT TYPE (05) FOLLOWED BY AN 8 DIGIT I.D. S/N WITH NO SPACES. (BARCODE HEIGHT TO BE .150MIN).
6. FCC/ IC ID NUMBERS TO BE LISTED ON THE RIGHT SIDE OF THE LABEL.
7. HUNT OR IT'S CONTRACTORS WILL PROVIDE SERIAL NUMBERS WITH EACH PURCHASE.
8. HUNT PRODUCT NAME AND REV LISTED AS SHOWN.
9. LABEL MANUFACTURER: WHEN EACH PURCHASE ORDER IS COMPLETED, PROVIDE THE VERIFIED RANGE & DATE COMPLETED TO HUNT TECHNOLOGIES MANUFACTURING ENGINEER OR PURCHASING.
10. THE REVISION ALPHA CHARACTER IS THE PRODUCT TRACKING I.D. AND SHALL BE AS SHOWN ON THE LABEL IMAGE.
11. MANUFACTURE DATE . FORMAT IS MM/YY.
12. NARROW BAR IS 10 MIL.

REVISIONS							
DWG REV.	ECO# IMRFB	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE	APPROVED
A	3487		RELEASE FOR PRODUCTION	MBD	121/27/06		

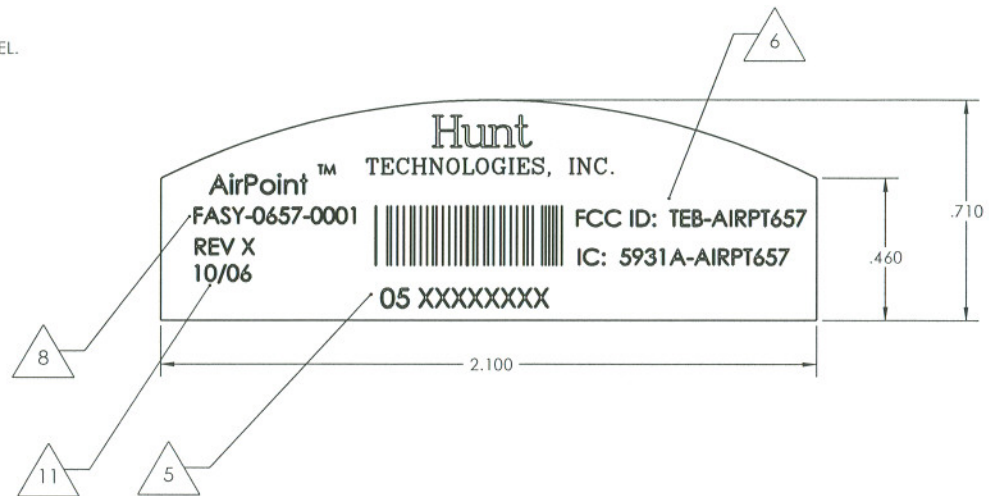

UNCONTROLLED

NOTICE:
THIS DOCUMENT CONTAINS INFORMATION
PROPRIETARY TO HUNT TECHNOLOGIES INC.
ANY USE OR DISCLOSURE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING		CHECKED BY:	DATED:	COMPANY:		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ± 1° 3 PL ± .015		INITIATOR:	R. HARRIS	DATED:	3/23/06	HUNT TECHNOLOGIES, INC. PEQUOT LAKES, MN 56472
MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. () DENOTES REFERENCE ONLY.		QUALITY ASSURANCE:	B. HEITKOTTER	DATED:	3/23/06	TITLE: LABEL, AIRPOINT 0657 BARCODE EXTERIOR
		MANUFACTURING:	S. WHITE	DATED:	3/26/06	PART NO. LABL-00181_A
		DRAWN BY:	M. DAVIS	DATED:	1/30/06	DWG. NO. LABL-00181_A
				DATED:	-	SCALE: NONE
						SIZE: B
						SHEET: 1 OF 1