

TEST REPORT

Equipment Under Test	: S-911 Personal Locator
Model No.	: S-911 205/206
FCC ID	: TET-S911LOCATOR
Applicant	: Laipac Technology Inc.
Address of Applicant	: 55 West Beaver Creek Rd., Unit 1, Richmond Hill, Ontario, L4B 1K5, Canada
Date of Receipt	: 2005.12.05
Date of Test(s)	: 2006.06.06~2006.07.03
Date of Issue	: 2006.07.03

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI / IEEE C95.1 , C95.3, IEEE 1528**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

Tested by : Leo Hsu *Leo Hsu* **Date** : 2006.07.03

Approved by : Robert Chang *Robert Chang* **Date** : 2006.07.03

Contents

1. General Information

1.1 Testing Laboratory.....	4
1.2 Details of Applicant.....	4
1.3 Description of EUT.....	4
1.4 Test Environment.....	5
1.5 Operation description.....	5
1.6 The SAR Measurement System.....	5
1.7 System Components.....	7
1.8 SAR System Verification.....	8
1.9 Tissue Simulant Fluid for the Frequency Band	9
1.10 Test Standards and Limits	10

2. Summary of Results..... 13

3. Instruments List..... 15

4. Measurements..... 16

GSM 850MHz

4.1.1 Right-head, cheek, lowest channel.....	16
4.1.2 Right-head, cheek, middle channel.....	17
4.1.3 Right-head, cheek, highest channel.....	18
4.1.4 Left-head, cheek, lowest channel.....	19
4.1.5 Left-head, cheek, middle channel.....	20
4.1.6 Left-head, cheek, highest channel.....	21
4.1.7 Right-head, tilt 15°, lowest channel.....	22
4.1.8 Right-head, tilt 15°, middle channel.....	23
4.1.9 Right-head, tilt 15°, highest channel.....	24
4.1.10 Left-head, tilt 15°, lowest channel.....	25
4.1.11 Left-head, tilt 15°, middle channel.....	26
4.1.12 Left-head, tilt 15°, highest channel.....	27
4.1.13 Body(testing in GPRS mode), lowest channel.....	28
4.1.14 Body(testing in GPRS mode), middle channel.....	29
4.1.15 Body(testing in GPRS mode), highest channel.....	30

PCS 1900MHz

4.2.1 Right-head, cheek, lowest channel.....	31
4.2.2 Right-head, cheek, middle channel.....	32
4.2.3 Right-head, cheek, highest channel.....	33
4.2.4 Left-head, cheek, lowest channel.....	34
4.2.5 Left-head, cheek, middle channel.....	35
4.2.6 Left-head, cheek, highest channel.....	36
4.2.7 Right-head, tilt 15°, lowest channel.....	37
4.2.8 Right-head, tilt 15°, middle channel.....	38

4.2.9 Right-head, tilt 15°, highest channel.....	39
4.2.10 Left-head, tilt 15°, lowest channel.....	40
4.2.11 Left-head, tilt 15°, middle channel.....	41
4.2.12 Left-head, tilt 15°, highest channel.....	42
4.2.13 Body (testing in GPRS mode), lowest channel.....	43
4.2.14 Body (testing in GPRS mode), middle channel.....	44
4.2.15 Body (testing in GPRS mode), highest channel.....	45

System Verification

4.3.1 GSM 900MHz Head.....	46
4.3.2 GSM 900MHz Muscle.....	47
4.3.3 PCS 1900MHz Head.....	48
4.3.4 PCS 1900MHz Muscle.....	49

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd.
134, Wu Kung Road, Wuku industrial zone
Taipei county, Taiwan, R.O.C.
Telephone : +886-2-2299-3279
Fax : +886-2-2298-0488
Internet : <http://www.sgs.com.tw>

1.2 Details of Applicant

Name : Laipac Technology Inc.
Address : 55 West Beaver Creek Rd., Unit 1, Richmond Hill,
Ontario, L4B 1K5,
Country : Canada
Telephone : 905-762-1228
Fax : 905-763-1737
Contact Person : Diego Lai
E-mail : diego@laipac.com

1.3 Description of EUT(s)

EUT Name	S-911 Personal Locator	
Trademark	S-911 Personal Locator	
IMEI	012345678901231	
FCC ID	TET-S911LOCATOR	
Modulation mode	GMSK	
Duty Cycle	GSM	GPRS
	1/8	1/4
Maximum RF Conducted Power	GSM 850	PCS 1900
	32.6 dBm	29.8 dBm
TX Frequency range	GSM 850	PCS 1900
	824.2-848.8 MHz	1850.2-1909.8MHz
Channel Number	GSM 850	PCS 1900

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

(AFRFCN)	128-251	512-810
Battery Type	3.6V Lithium-Ion	
Antenna Type	Internal	
Antenna Gain	-1.35 dBi	
Exposure environment	Uncontrolled exposure	
HW Version	Version 2.60	
SW Version	Version 1.32	
Max. SAR Measured (1 g)	0.882 W/kg (At GSM 850 Right-Tilt 251 Channel)	

1.4 Test Environment

Ambient Temperature: 22.2° C

Tissue Simulating Liquid: 21.7° C

Relative Humidity: 62 %

1.5 Operation description

The EUT is controlled by using a Universal Radio Communication Tester (CMU 200), and the communication between the EUT and the tester is established by air link. The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged. During the SAR testing, the DASY4 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.

1. Measure SAR value in GSM mode for Right-Head & Left-Head side.
2. The EUT support GPRS multislot class=10. In order to testing in GPRS mode in body position (worst case), the phone is set to 2 uplink slots.

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1759-field probe is used to determine the internal

electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

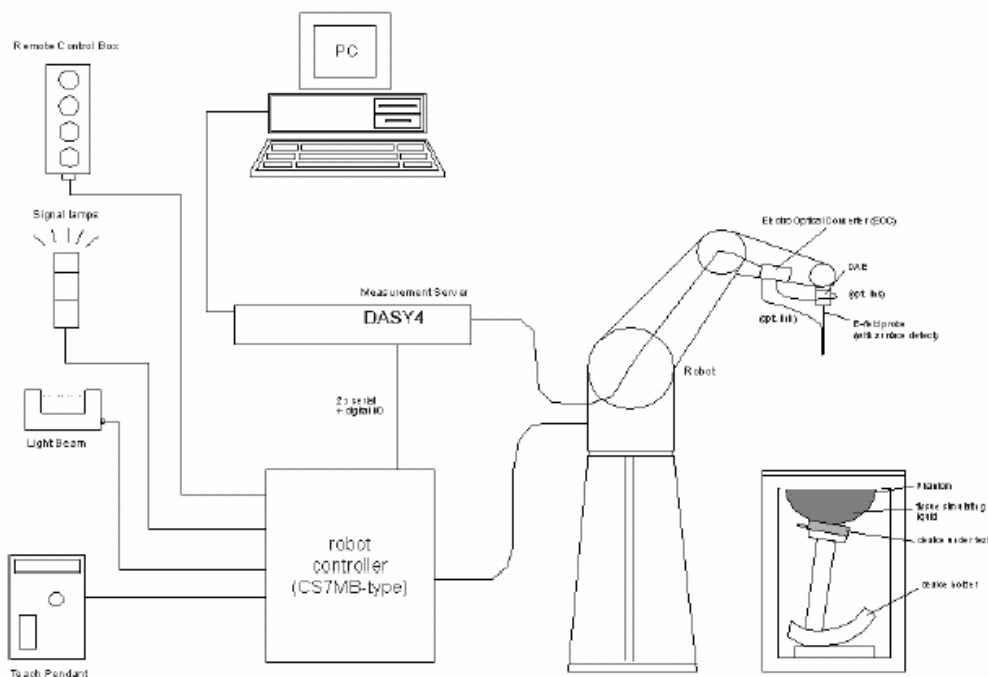


Fig. a The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.


This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

1.7 System Components

ET3DV6 E-Field Probe

- Construction:** Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material
(resistant to organic solvents, e.g. glycol)
- Calibration:** In air from 10 MHz to 2.5 GHz
In brain simulating tissue at
frequencies of 850&1900 MHz
(accuracy $\pm 8\%$)
- Frequency:** 10 MHz to 6 GHz; Linearity: ± 0.2 dB
(30 MHz to 3 GHz)
- Directivity:** ± 0.2 dB in brain tissue (rotation around probe axis)
 ± 0.4 dB in brain tissue (rotation normal to probe axis)
- Dynamic Range:** 5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB
- Surface. Detect:** ± 0.2 mm repeatability in air and clear liquids over
diffuse reflecting surfaces
- Dimensions:** Overall length: 330 mm
Tip length: 16 mm
Body diameter: 12 mm
Tip diameter: 6.8 mm
Distance from probe tip to dipole centers: 2.7 mm
- Application:** General dosimetry up to 3 GHz
Compliance tests of mobile phone

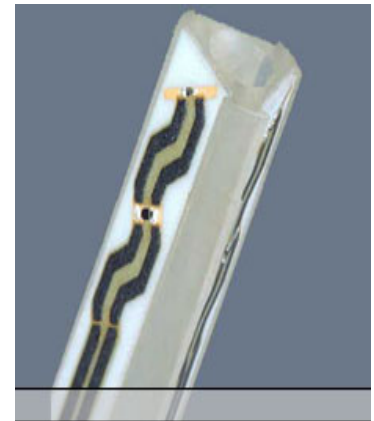


ET3DV6 E-Field Probe

SAM PHANTOM V4.0C

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ± 0.2 mm
Filling Volume: Approx. 25 liters
Dimensions: Height: 251 mm;
 Length: 1000 mm;
 Width: 500 mm

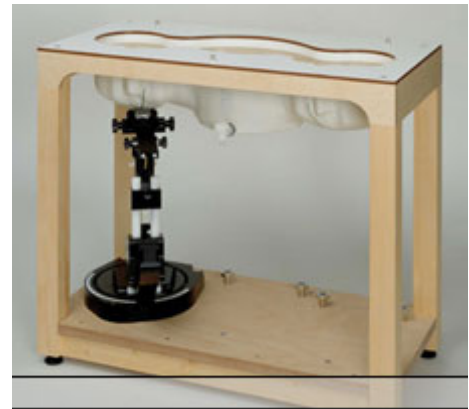

DEVICE HOLDER

Construction In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

target SAR values. These tests were done at 850&1900 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22.2°C, the relative humidity was in the range 62% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.


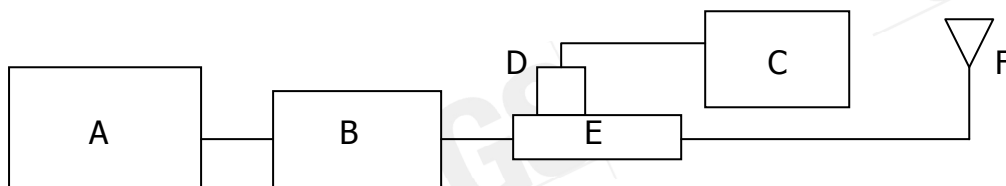


Fig.b The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. Agilent Model 778D and 777D
Dual directional coupling
- F. Reference dipole antenna

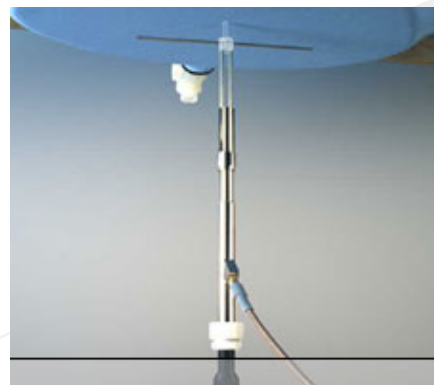

Photograph of the dipole Antenna

Validation Kit	Frequency	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured date
DT3DV6 S/N :1759	900 MHz (Head)	2.7 m W/g	1.74 m W/g	2.66m W/g	1.72m W/g	2006/06/07
	900 MHz (Body)	2.78 m W/g	1.81 m W/g	2.64 m W/g	1.66 m W/g	2006/07/03
	1900 MHz (Head)	9.64 m W/g	5.07 m W/g	9.43 m W/g	4.96 m W/g	2006/06/06
	1900 MHz (Body)	9.92 m W/g	5.28 m W/g	10.1 m W/g	5.19 m W/g	2006/07/03

Table 1. Results system validation

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the HP

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8714ET Network Analyzer (30 KHz - 3000 MHz) by using a procedure detailed in Section V.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurement. The depth of the tissue simulant in the ear reference point of the phantom was 15cm±5mm during all tests. (page.2 Fig.2 in Appendix part)

F (MHz)	Tissue type	Limits/ Measured	Dielectric Parameters		
			ρ	σ (S/m)	Simulated Tissue Temp(° C)
900	Head	Measured, 2006.06.07	39.4	0.935	21.7
		Recommended Limits	39.4-43.6	0.86-1.02	20-24
	Body	Measured, 2006.07.03	53.2	0.944	22.1
		Recommended Limits	52.3-58	0.92-1.1	20-24
1900	Head	Measured, 2006.06.06	39.1	1.35	21.8
		Recommended Limits	38-42	1.305-1.595	20-24
	Body	Measured, 2006.07.03	54.1	1.55	22.0
		Recommended Limits	50.6-56	1.44-1.6	20-24

Table2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the brain tissue simulating liquid for 900 & 1900 MHz is:

Ingredient	900MHz(Head)	900MHz(Body)	1900MHz(Head)	1900MHz(Body)
BDGMBE	X	X	444.52 g	300.67
Water	532.98 g	632.68	552.42 g	716.56
Salt	18.3 g	11.72	3.06 g	4.0
Preventol D-7	2.4 g	1.2	X	X
Cellulose	3.2 g	X	X	X
Sugar	766.0 g	600 g	X	X
Total amount	1 L (1.0kg)	1 L (1.0kg)	1 L (1.0kg)	1 L (1.0kg)

Table 3. Recipes for tissue simulating liquid

1.10 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical

and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
----------------	--	--

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

2.Summary of Results

GSM 850 MHZ

Right Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.5dbm	0.543/0.349	22	21.6
	190	836.6	32.6dbm	0.551/0.355	22	21.6
	251	848.8	32.4dbm	0.565/0.362	22	21.6

Left Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.5dbm	0.434/0.289	22	21.6
	190	836.6	32.6dbm	0.447/0.296	22	21.6
	251	848.8	32.4dbm	0.445/0.297	22	21.6

Right Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.5dbm	0.793/0.455	22	21.6
	190	836.6	32.6dbm	0.797/0.457	22	21.6
	251	848.8	32.4dbm	0.882/0.517	22	21.6

Left Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.5dbm	0.417/0.271	22	21.6
	190	836.6	32.6dbm	0.423/0.274	22	21.6
	251	848.8	32.4dbm	0.435/0.281	22	21.6

Body Worn (testing in GPRS mode & multislot class=10)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
850 MHz	128	824.2	32.5dbm	0.274/0.194	22	21.6
	190	836.6	32.6dbm	0.279/0.201	22	21.6
	251	848.8	32.4dbm	0.301/0.214	22	21.6

Note:

SAR measurement results for the Mobile Phone at maximum output power.

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

PCS 1900 MHZ

Right Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.7dbm	0.419/0.222	22	21.6
	661	1880	29.8dbm	0.418/0.222	22	21.6
	810	1909.8	29.8dbm	0.443/0.235	22	21.6

Left Head (Cheek Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.7dbm	0.22/0.124	22	21.6
	661	1880	29.8dbm	0.223/0.125	22	21.6
	810	1909.8	29.8dbm	0.237/0.132	22	21.6

Right Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.7dbm	0.446/0.234	22	21.6
	661	1880	29.8dbm	0.451/0.236	22	21.6
	810	1909.8	29.8dbm	0.483/0.252	22	21.6

Left Head (15° Tilt Position)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.7dbm	0.261/0.145	22	21.6
	661	1880	29.8dbm	0.258/0.144	22	21.6
	810	1909.8	29.8dbm	0.275/0.152	22	21.6

Body Worn (testing in GPRS mode multislot class=10)

Frequency	Channel	MHz	Conducted Output Power(Peak)	Measured(W/kg) 1g/10g	Amb. Temp[°C]	Liquid Temp[°C]
1900 MHz	512	1850.2	29.7dbm	0.281/0.17	22	21.6
	661	1880	29.8dbm	0.264/0.159	22	21.6
	810	1909.8	29.8dbm	0.248/0.148	22	21.6

Note:

SAR measurement results for the Mobile Phone at maximum output power.

3. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1759	Aug.30.2005
Schmid & Partner Engineering AG	900/1800 MHz System Validation Dipole	D900V2 D1900V2	178 5d027	Feb.07.2006 May.21.2006
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE3	547	Apr.28.2006
Schmid & Partner Engineering AG	Software	DASY 4 V4.6 Build 23	N/A	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	N/A	Calibration isn't necessary
Agilent	Network Analyzer	8714ET	0917593435	Oct.31.2005
Agilent	Dielectric Probe Kit	85070D	US01440168	Calibration isn't necessary
Agilent	Dual-directional coupler	777D 778D	50114 50313	Aug.12.2005 Aug12.2005
Agilent	RF Signal Generator	8648D	3847M00432	May.04.2006
Agilent	Power Sensor	8481H	MY41091361	May.29.2006
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	102189	Oct.24.2005

4. Measurements

RE Cheek_CH128

Date/Time: 2006/6/7 12:03:57

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 824.2$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.600 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

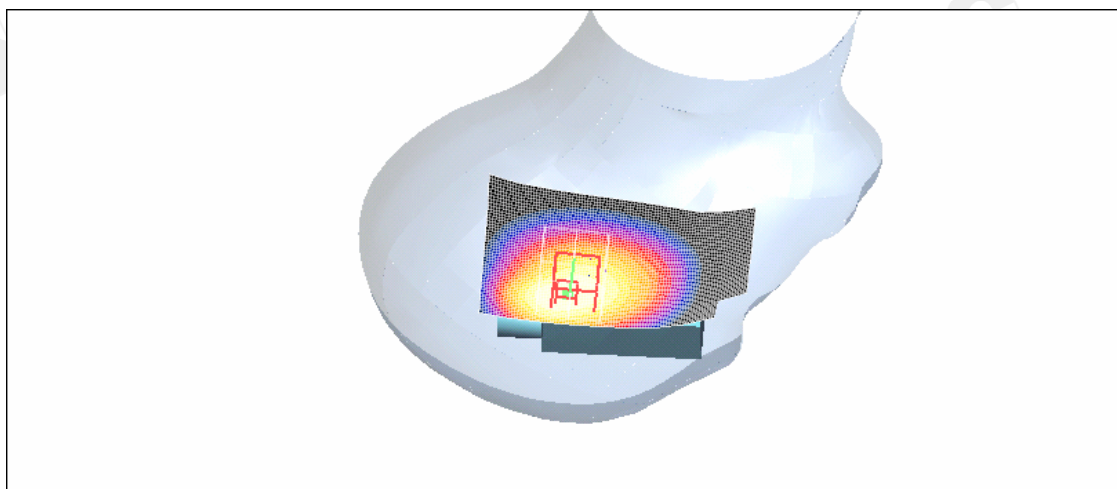

0 dB = 0.577mW/g

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

RE Cheek_CH190

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.612 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.4 V/m ; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.551 mW/g ; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.586 mW/g

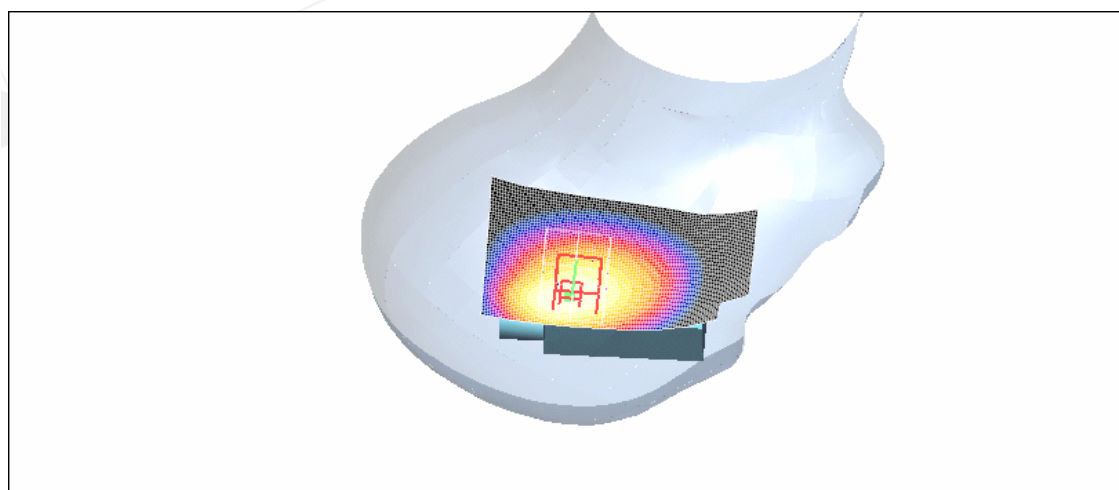

0 dB = 0.586 mW/g

RE Cheek_CH251

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.623 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.4 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.362 mW/g

Maximum value of SAR (measured) = 0.598 mW/g

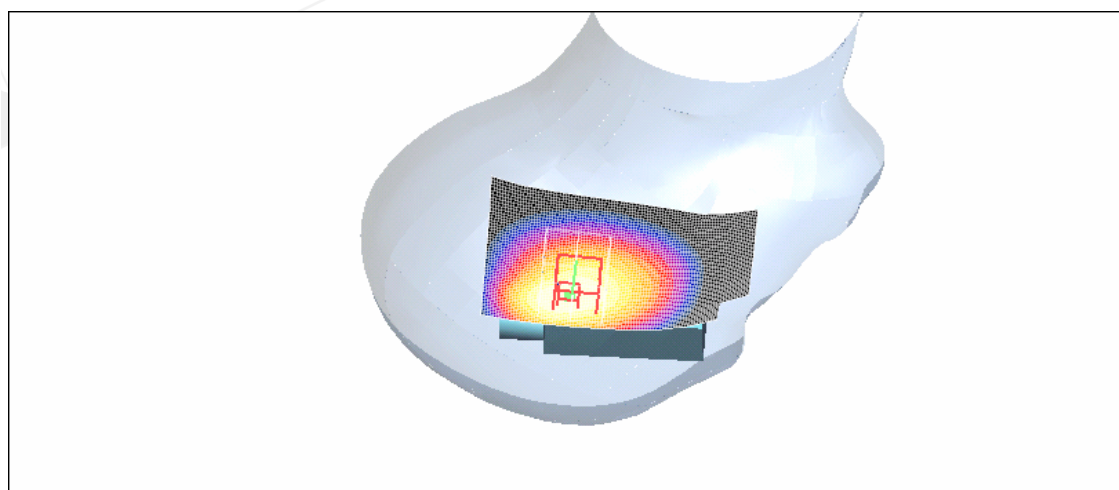

0 dB = 0.598mW/g

LE Cheek_CH128

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 824.2 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.480 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.3 V/m ; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.434 mW/g ; SAR(10 g) = 0.289 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

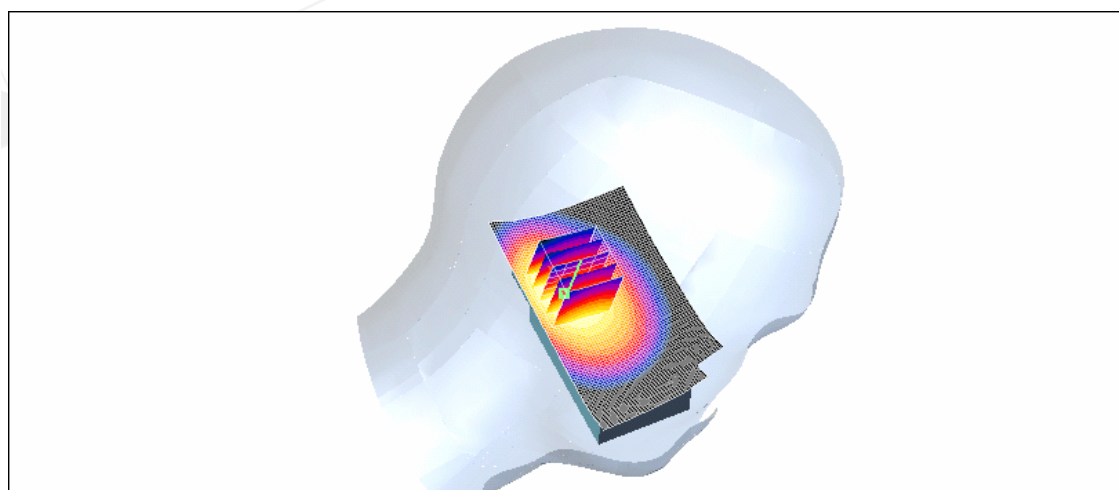

0 dB = 0.463 mW/g

LE Cheek_CH190

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.487 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.2 V/m ; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.447 mW/g ; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.481 mW/g

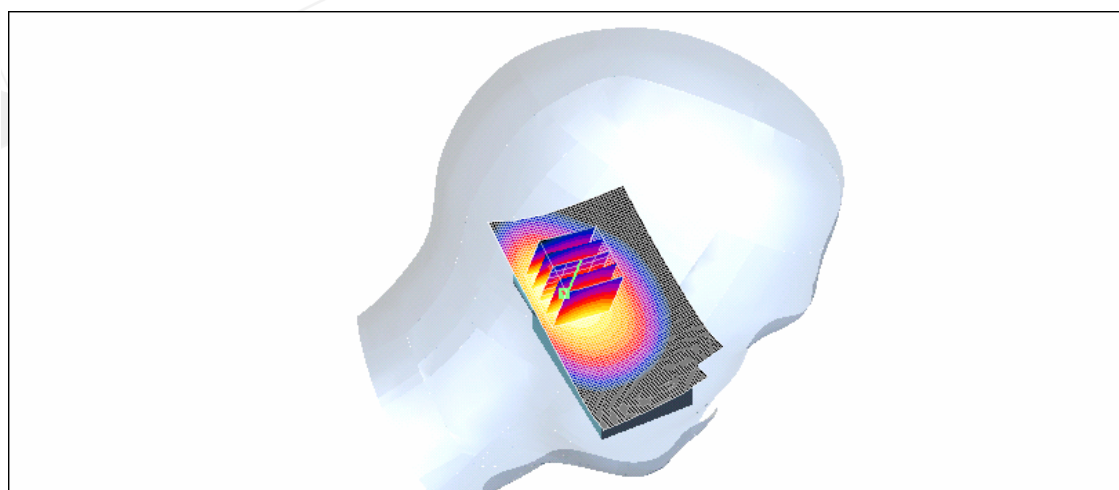

0 dB = 0.481 mW/g

LE Cheek_CH251

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.496 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.2 V/m ; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.445 mW/g ; SAR(10 g) = 0.297 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

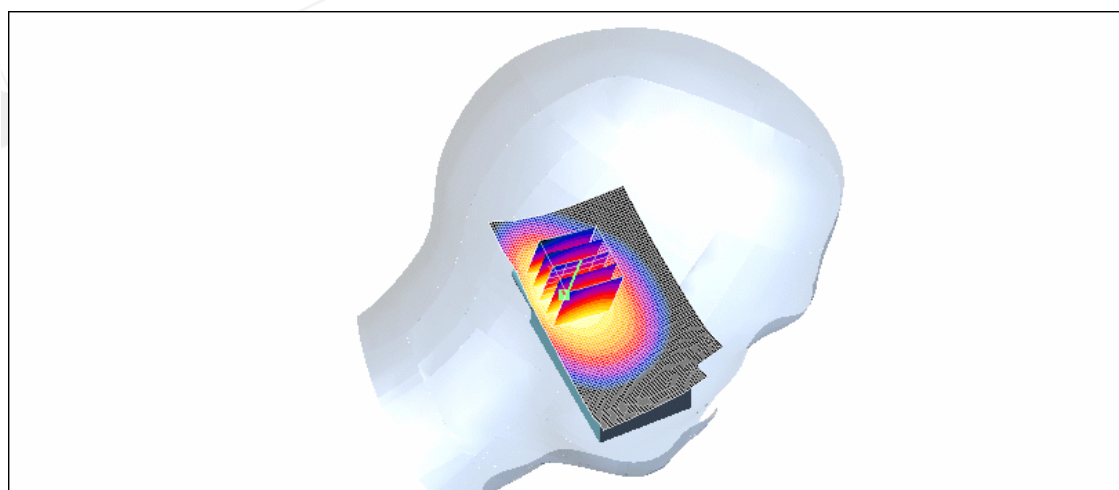

0 dB = 0.477 mW/g

RE Tilt_CH128

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 824.2 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.880 mW/g



Right Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.851 mW/g

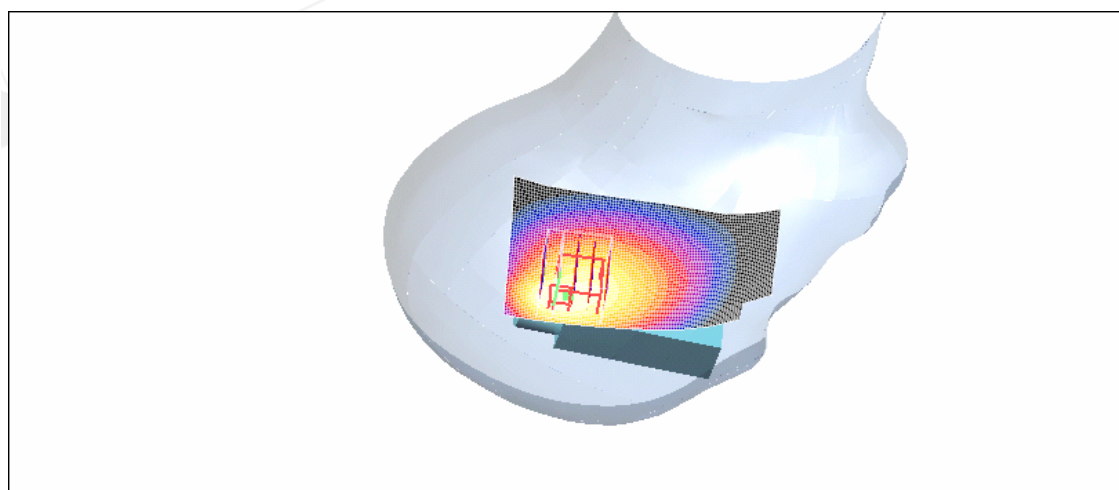

0 dB = 0.851mW/g

This document is issued by the Company subject to its General Conditions of Service which is available on request or accessible at www.sgs.com. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放，相關服務條款備索，或可在 www.sgs.com 中查閱，本公司之義務、免責、管轄權皆明確規範其中。除非另有說明，此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可，不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法，違犯者將會被依法追訴。

RE Tilt_CH190

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.868 mW/g



Right Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.457 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

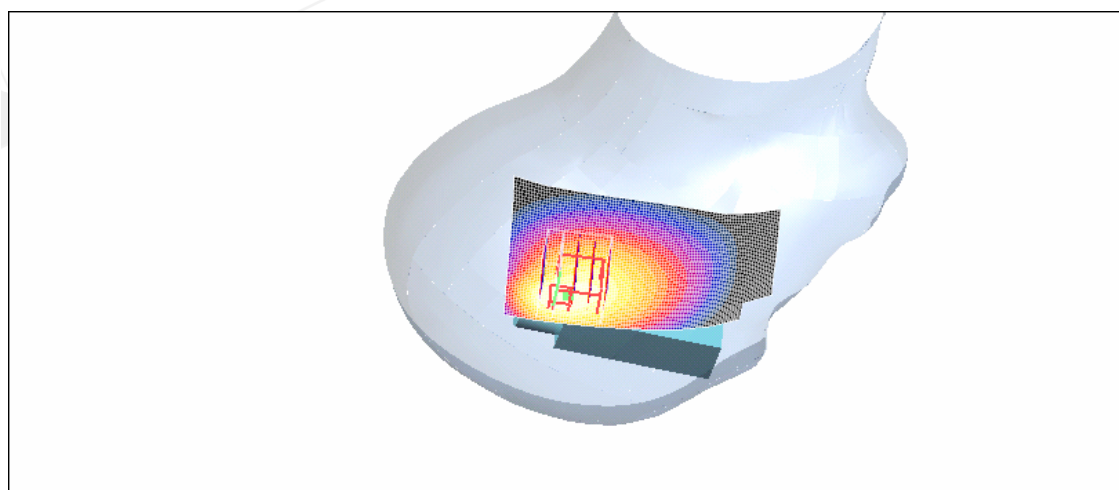

0 dB = 0.874mW/g

RE Tilt_CH251

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.00 mW/g



Right Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.3 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.882 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.941 mW/g

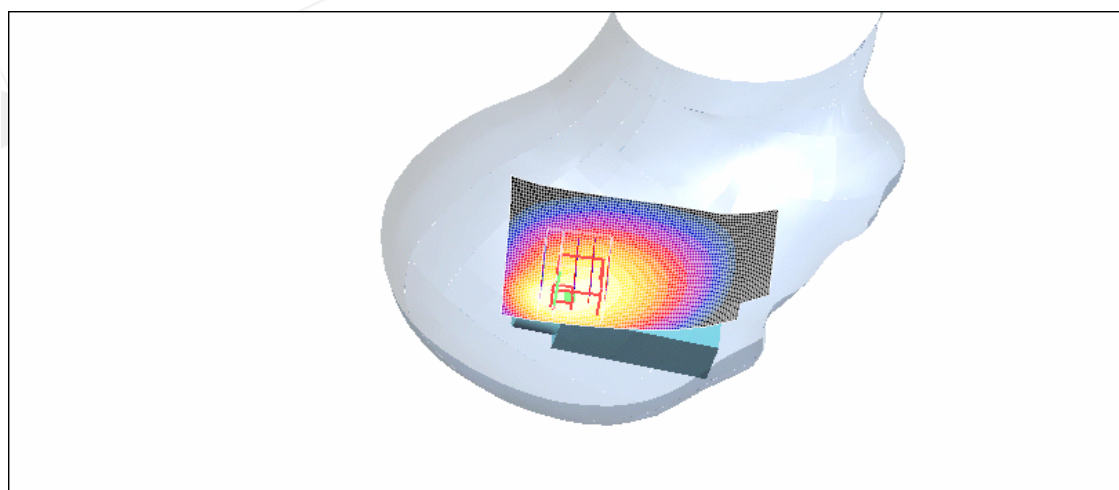

0 dB = 0.941mW/g

LE Tilt_CH128

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 824.2 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.470 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.8 V/m ; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.417 mW/g ; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

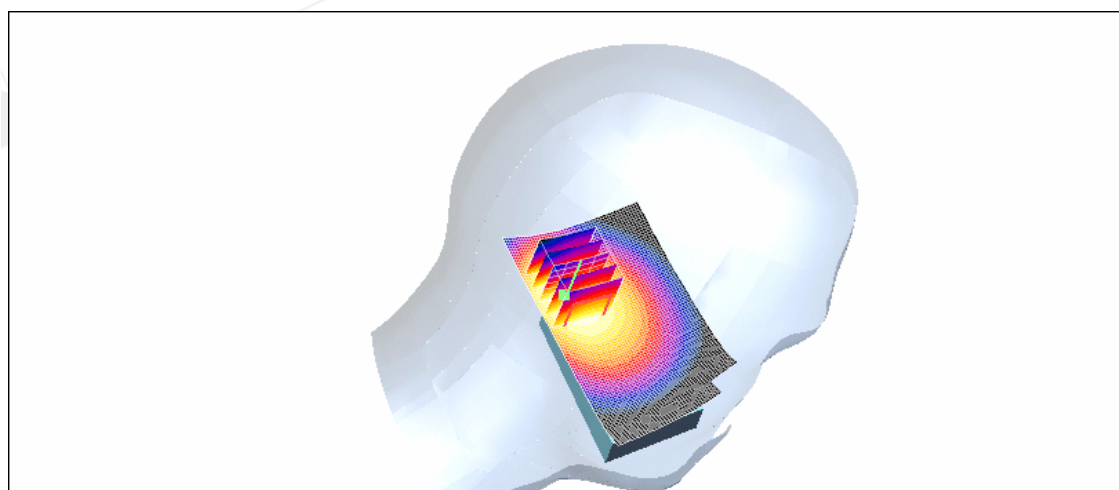

0 dB = 0.438 mW/g

LE Tilt_CH190

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.877 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.473 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.8 V/m ; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.701 W/kg

SAR(1 g) = 0.423 mW/g ; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.445 mW/g

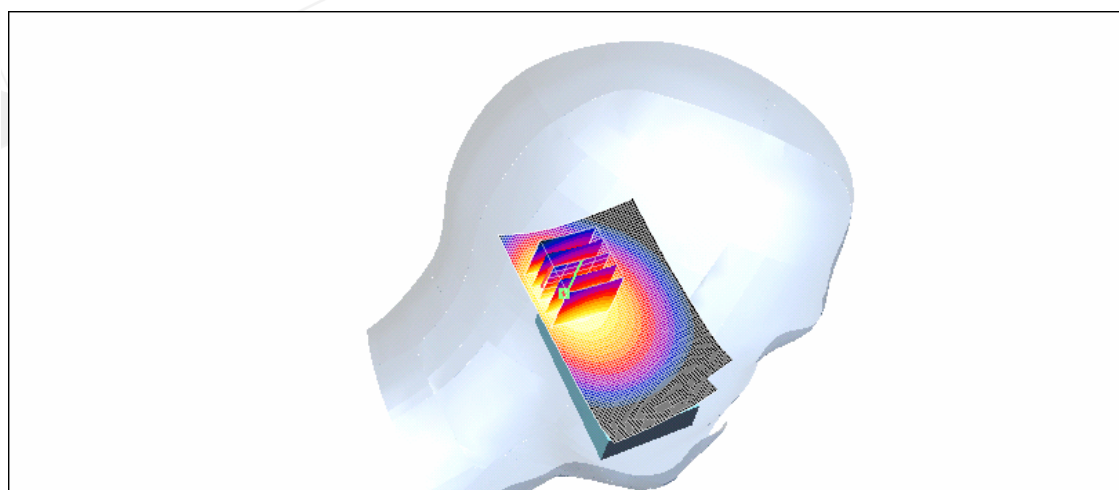

0 dB = 0.445 mW/g

LE Tilt_CH251

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 850 MHz Medium parameters used (extrapolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.485 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.8 V/m ; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.435 mW/g ; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.458 mW/g

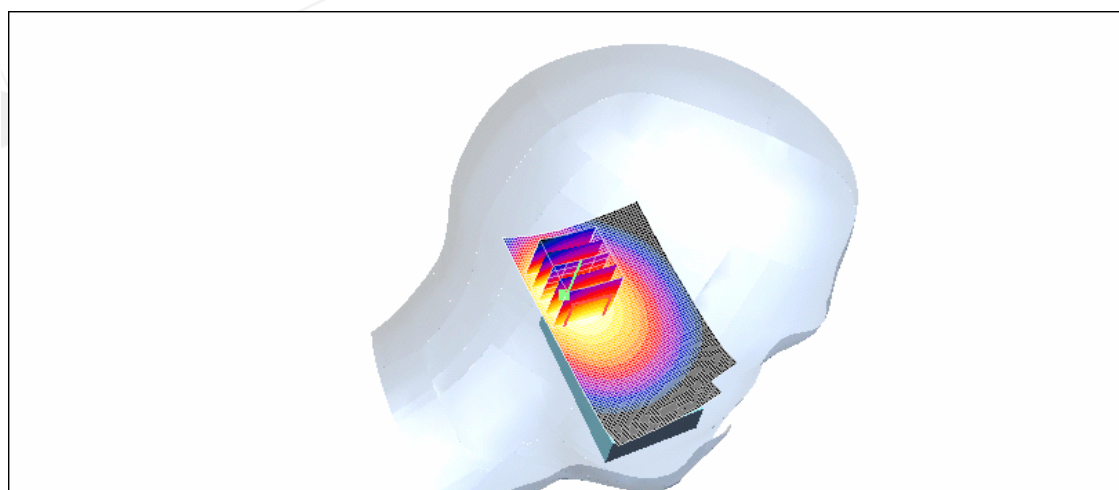

0 dB = 0.458 mW/g

Body128 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ mho/m;

$\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.293 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

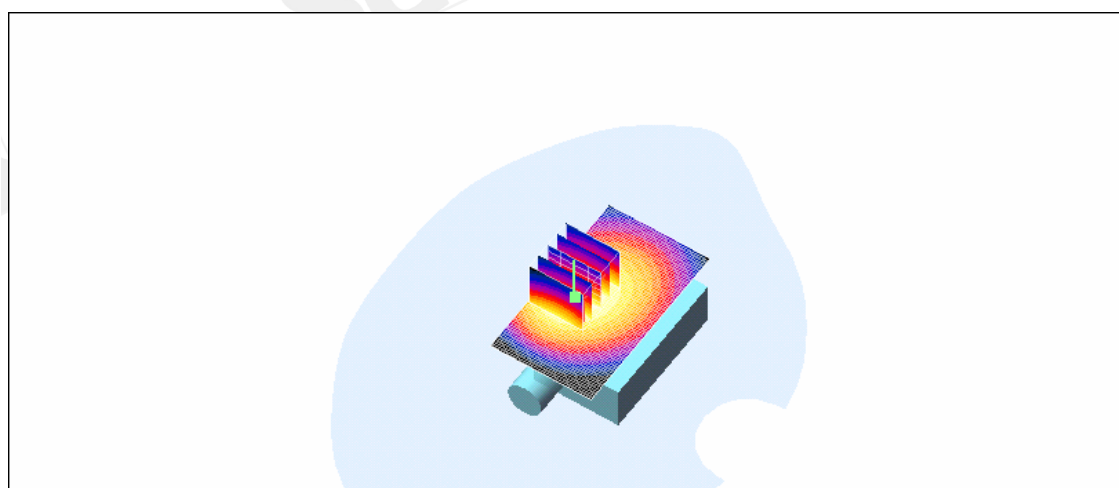

0 dB = 0.293mW/g

Body190 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$;

$\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.299 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.9 V/m ; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.279 mW/g ; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

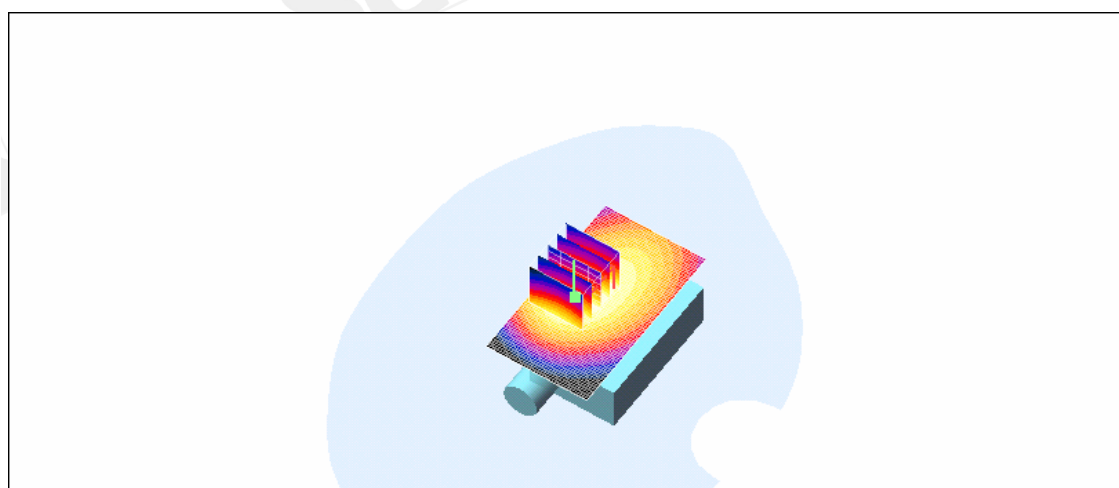

0 dB = 0.298 mW/g

Body251 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 850; Serial: 012345678901231

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.944 \text{ mho/m}$;

$\epsilon_r = 53.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.327 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.6 V/m ; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.301 mW/g ; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

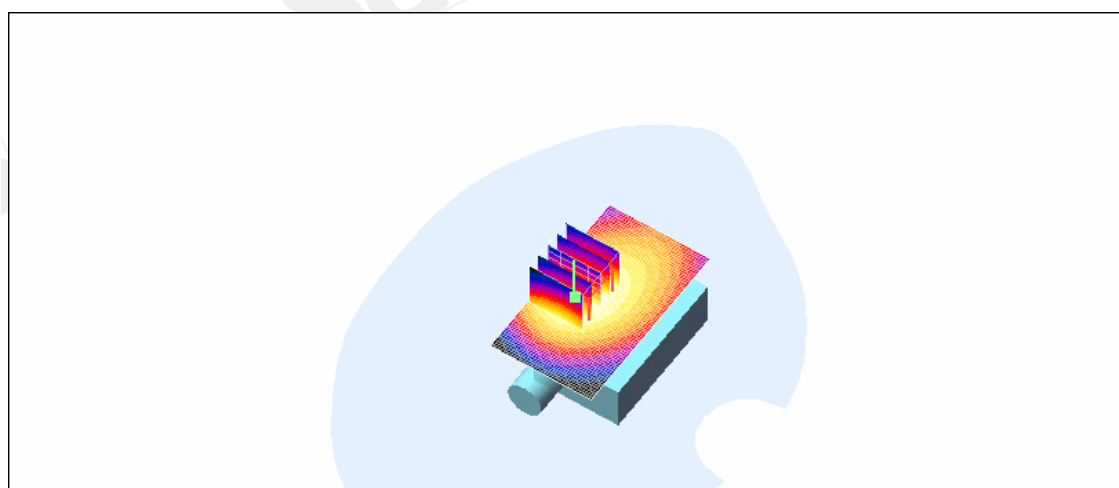

0 dB = 0.322 mW/g

RE Cheek_CH512

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.491 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.2 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

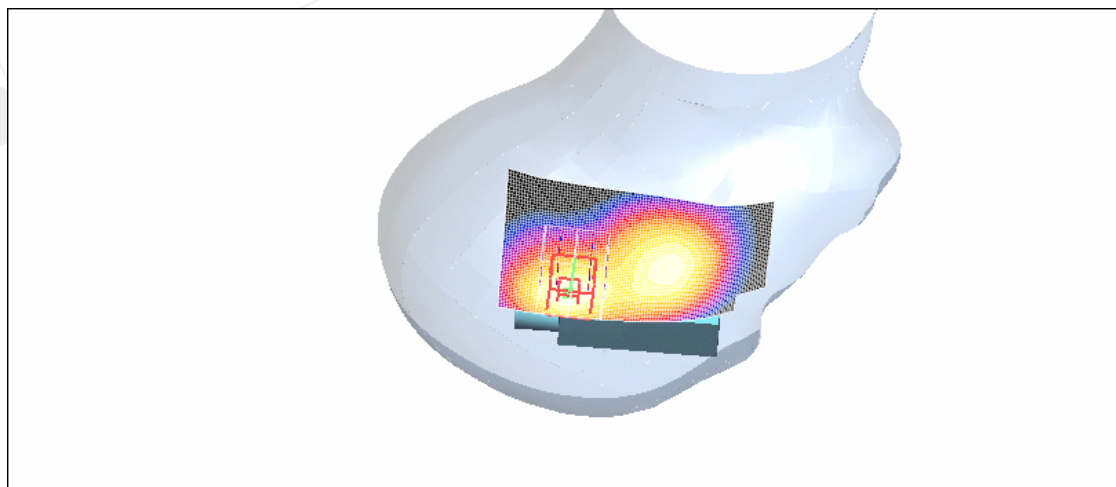

0 dB = 0.465mW/g

RE Cheek_CH661

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1800 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.29 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.481 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.1 V/m; Power Drift = -0.117 dB

Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.464 mW/g

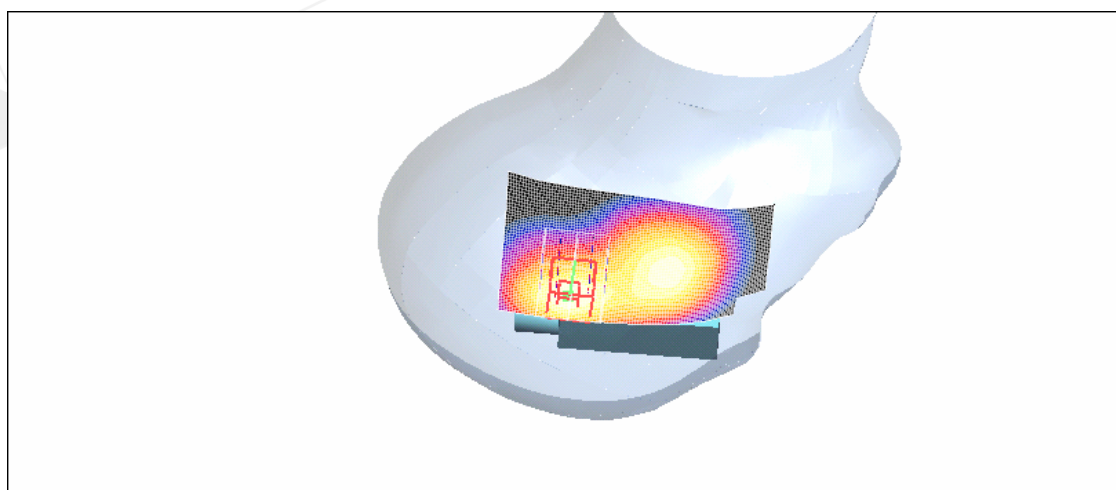

0 dB = 0.464mW/g

RE Cheek_CH810

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Right Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.499 mW/g



Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.9 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.494 mW/g

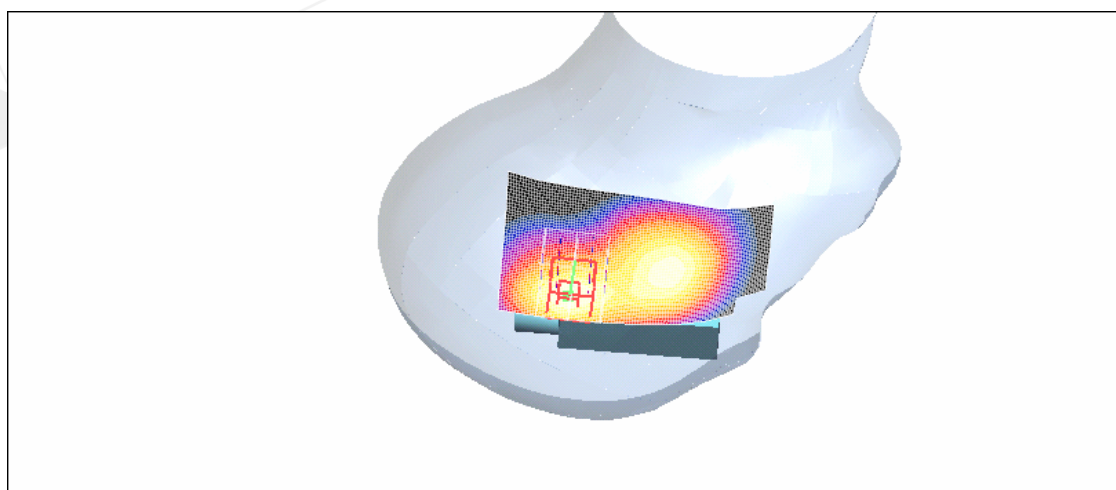

0 dB = 0.494mW/g

LE Cheek_CH512

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.247 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.72 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 0.239 mW/g

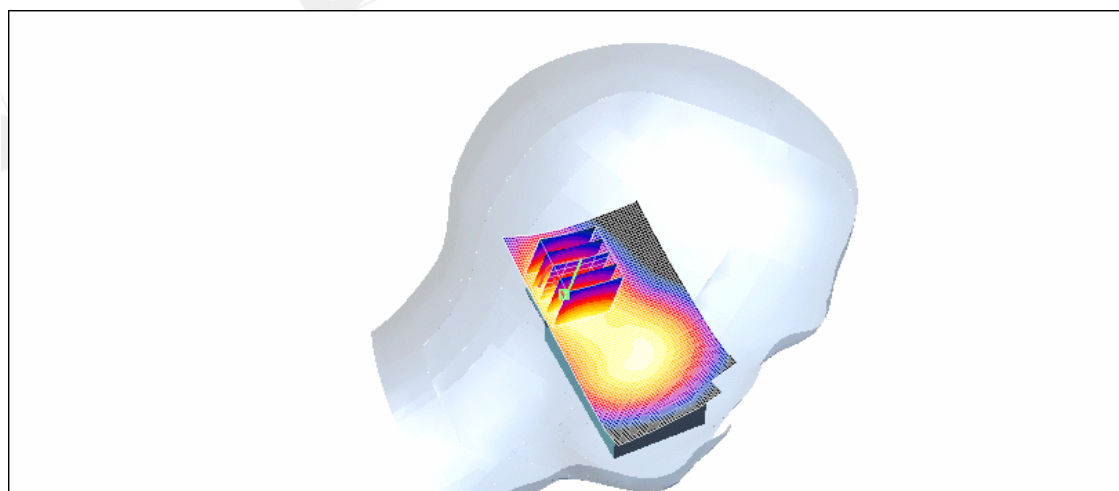

0 dB = 0.239mW/g

LE Cheek_CH661

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1800 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.29 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.254 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.73 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

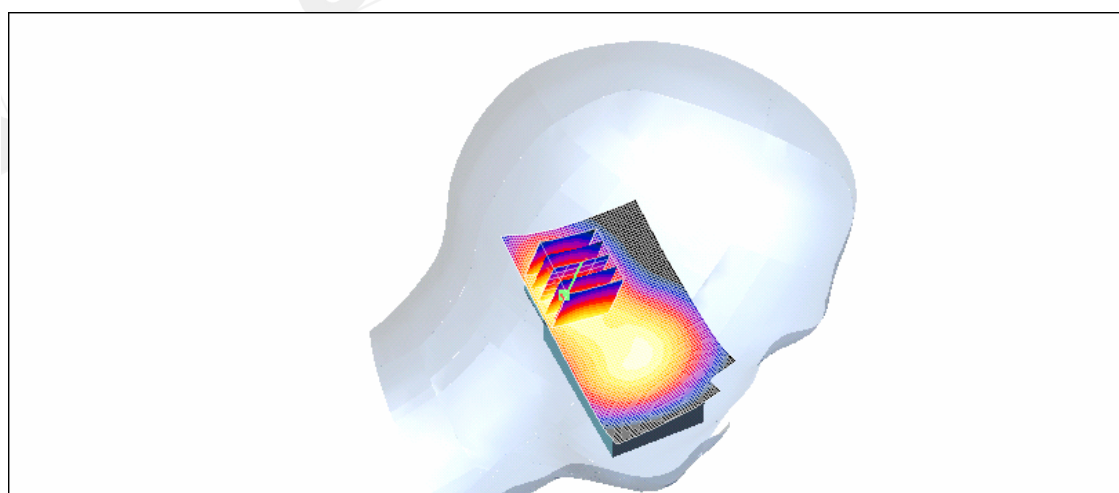

0 dB = 0.244mW/g

LE Cheek_CH810

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Cheek/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.265 mW/g



Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.62 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

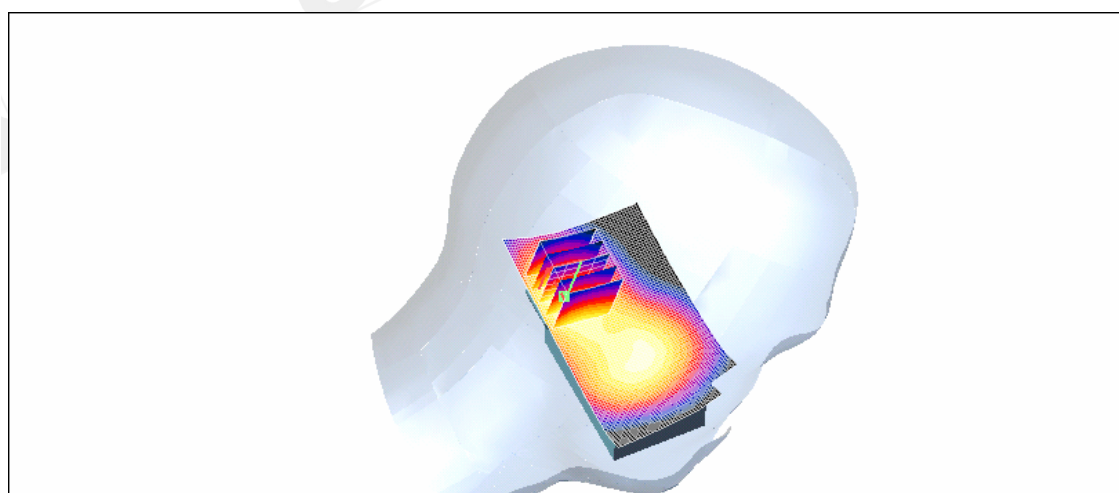

0 dB = 0.259mW/g

RE Tilt_CH512

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Righ Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.526 mW/g



Righ Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.9 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.488 mW/g

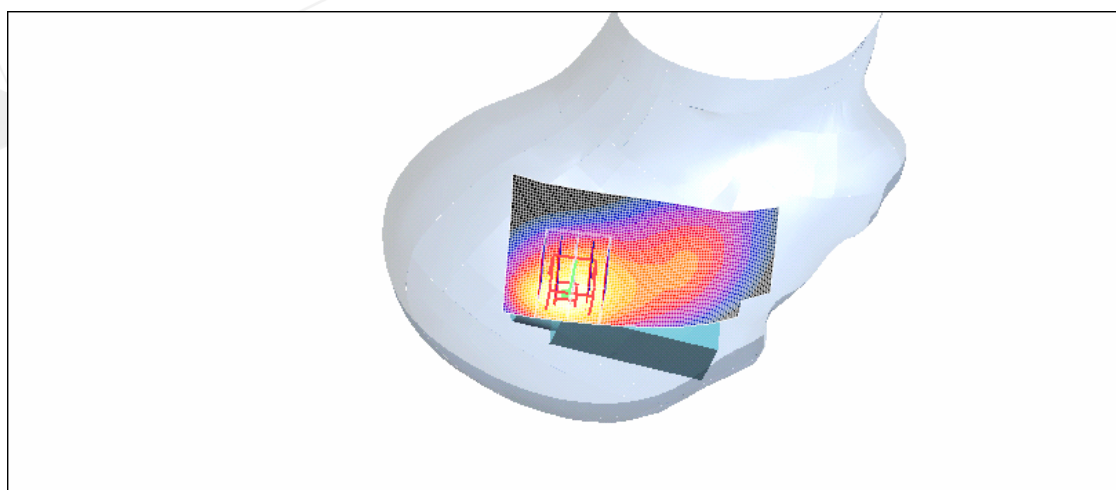

0 dB = 0.488mW/g

RE Tilt_CH661

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1800 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.29 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Righ Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.527 mW/g



Righ Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.9 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

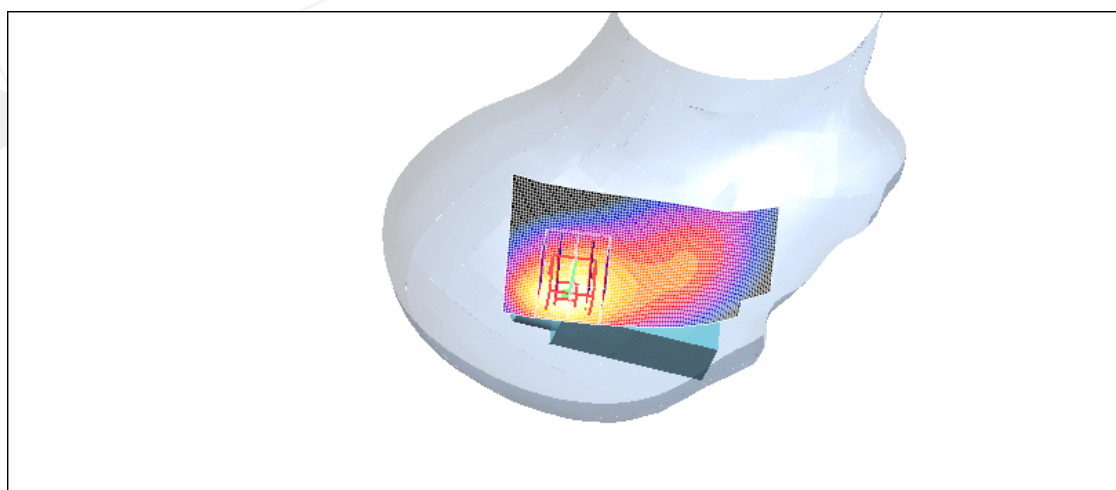

0 dB = 0.493mW/g

RE Tilt_CH810

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Righ Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.572 mW/g



Righ Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.9 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.525 mW/g

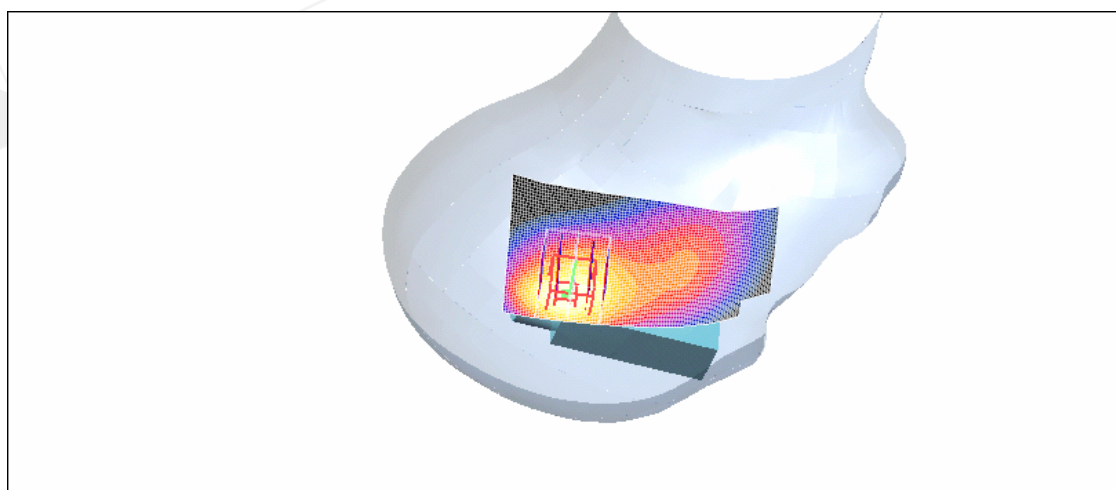

0 dB = 0.525mW/g

LE Tilt_CH512

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.28 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.305 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.3 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

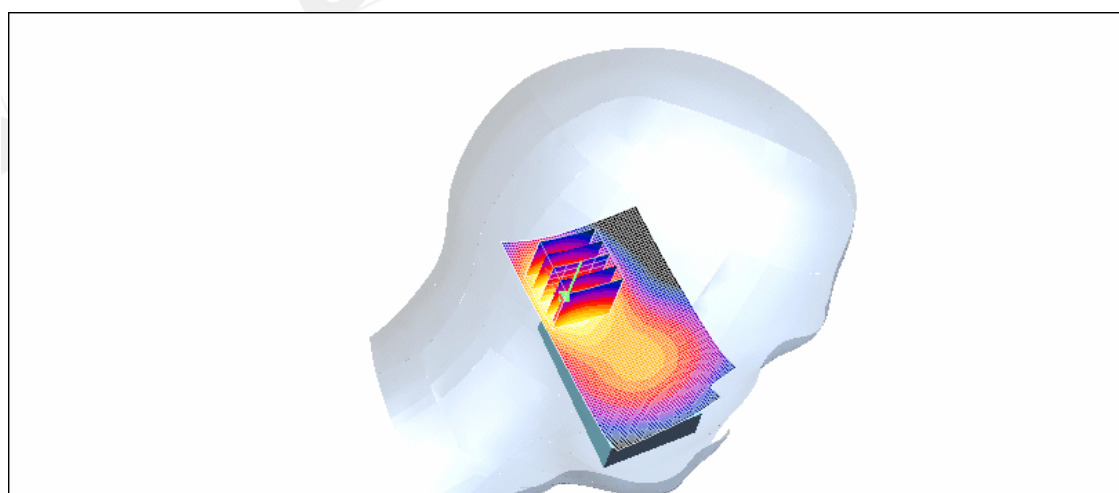

0 dB = 0.277mW/g

LE Tilt_CH661

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1800 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used (extrapolated): $f = 1800 \text{ MHz}$; $\sigma = 1.29 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.299 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.0 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

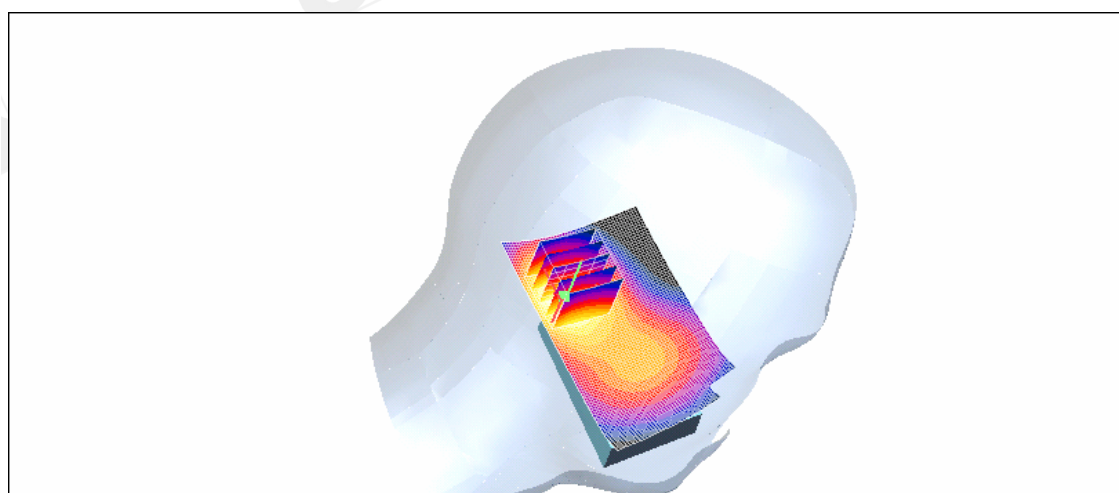

0 dB = 0.273mW/g

LE Tilt_CH810

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900MHz Medium parameters used: $f = 1910$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Left Tilt/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.317 mW/g



Left Tilt/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

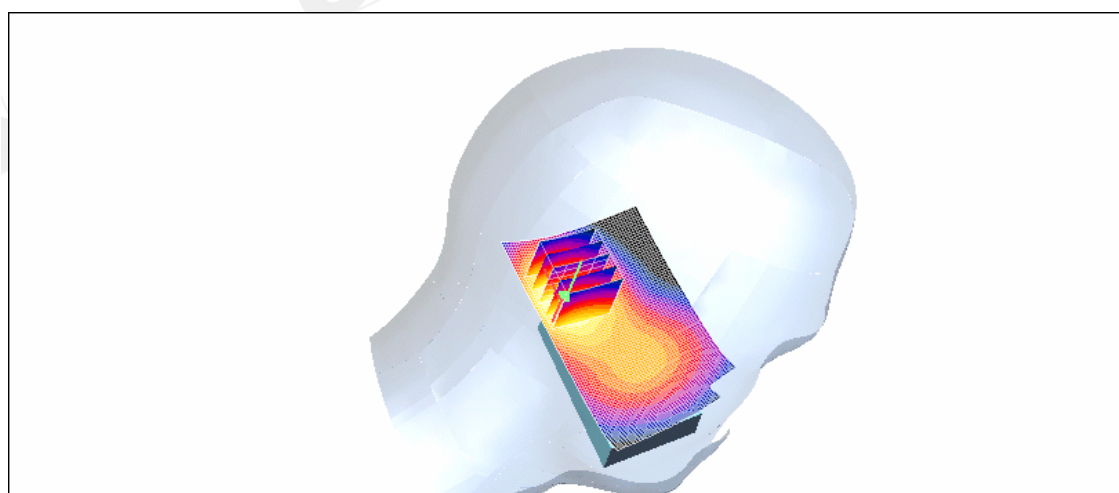

0 dB = 0.292mW/g

Body_CH512 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.311 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.4 V/m ; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.281 mW/g ; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

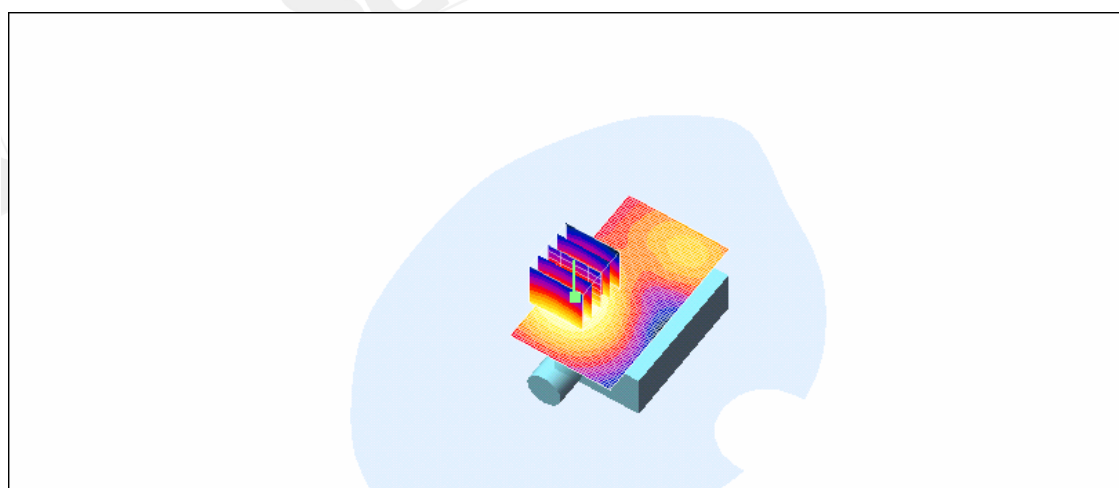

0 dB = 0.303 mW/g

Body_CH661 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.290 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.60 V/m ; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.264 mW/g ; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.286 mW/g

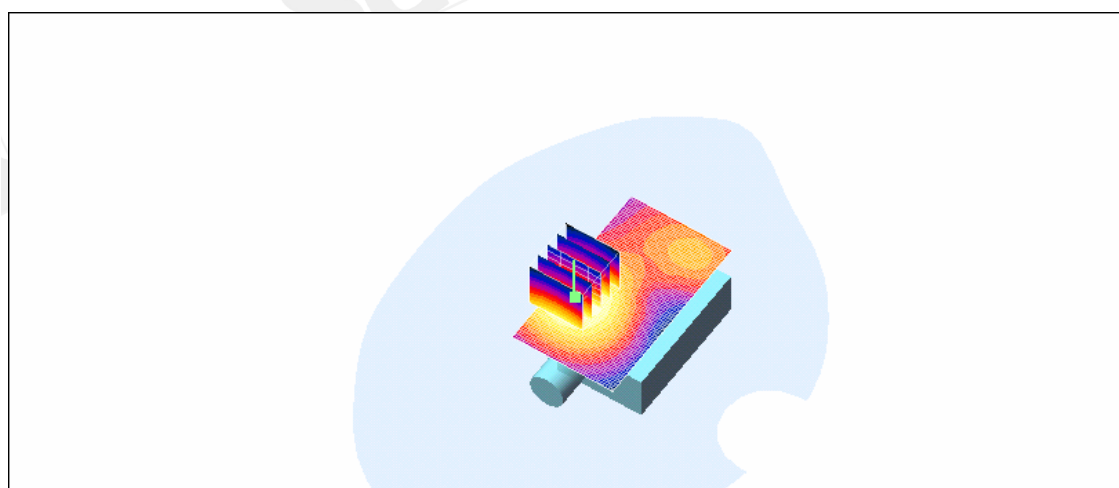

0 dB = 0.286 mW/g

Body_CH810 (testing in GPRS mode)

DUT: S-911 Laipac; Type: GSM 1900; Serial: 012345678901231

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1800 & 1900 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

BODY/Area Scan (41x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.272 mW/g



BODY/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.11 V/m ; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.248 mW/g ; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.269 mW/g

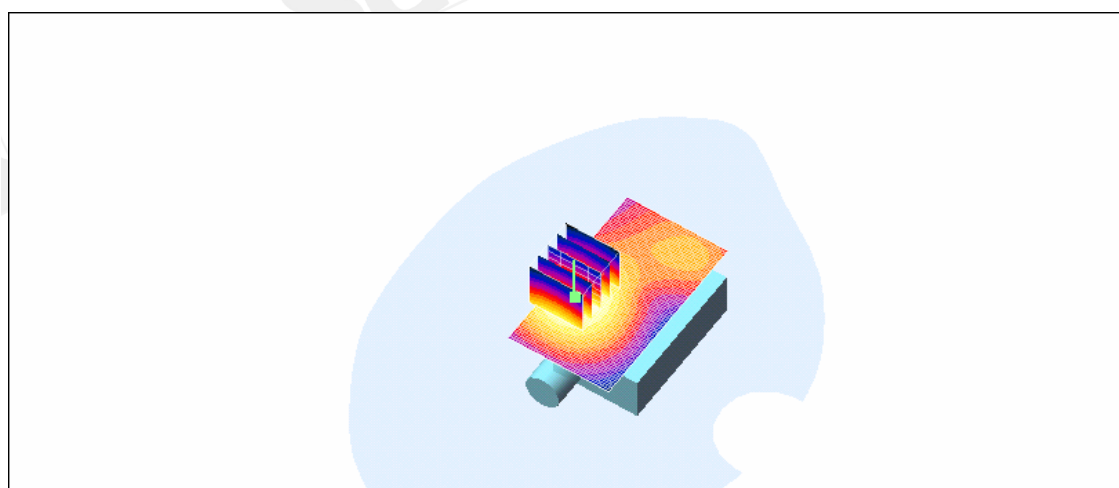

0 dB = 0.269 mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 900 \text{ MHz}$; $\sigma = 0.935 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(6.15, 6.15, 6.15); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mW/Area Scan (41x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.94 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.6 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 2.66 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.88 mW/g

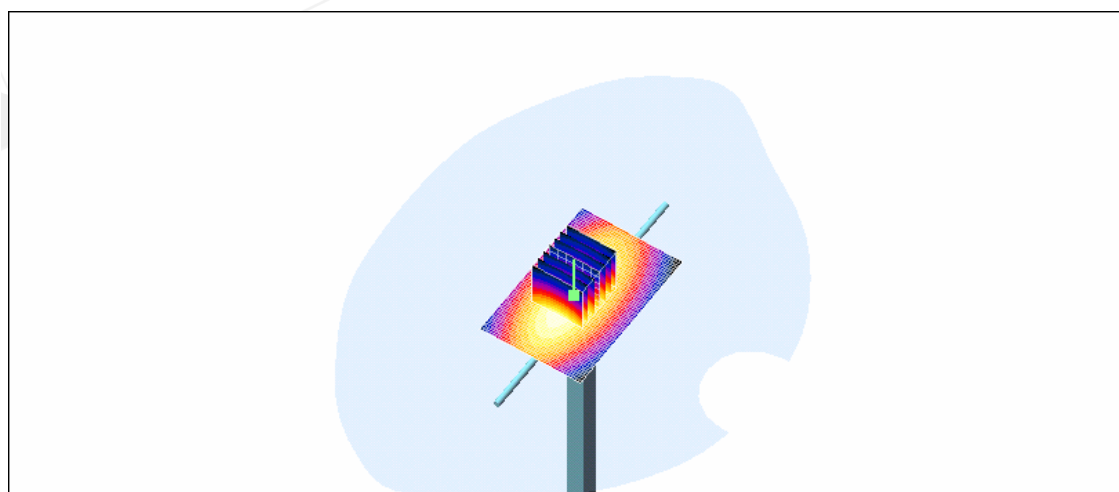

0 dB = 2.88mW/g

SAR System Performance Verification

DUT: Dipole 900 MHz; Type: D900V2; Serial: SN:178

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 900 \text{ MHz}$; $\sigma = 0.994 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.93, 5.93, 5.93); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.88 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.2 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.66 mW/g

Maximum value of SAR (measured) = 2.78 mW/g

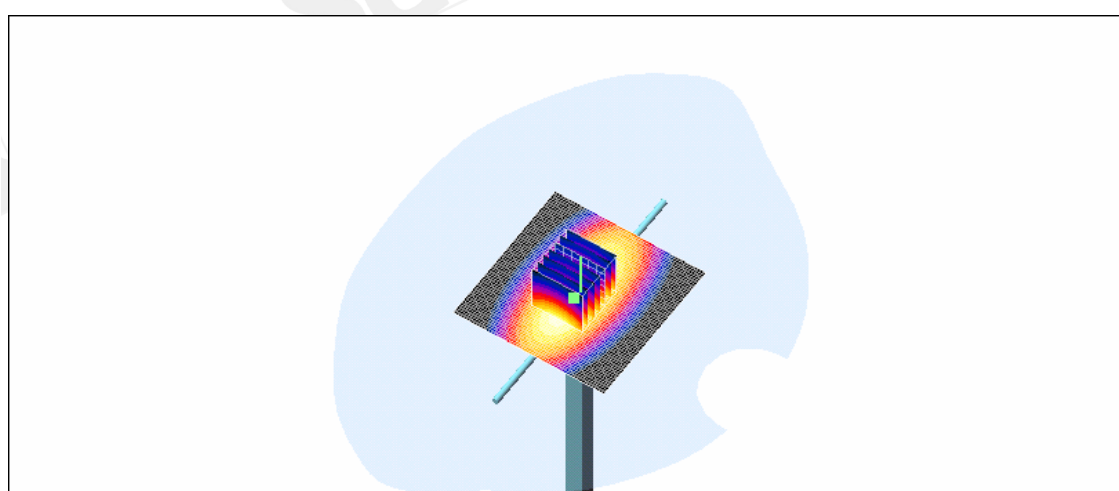

0 dB = 2.78mW/g

SAR System Performance Verification

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.35 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(5.11, 5.11, 5.11); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Pin=250mw/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.1 mW/g



Pin=250mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.8 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.43 mW/g; SAR(10 g) = 4.96 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

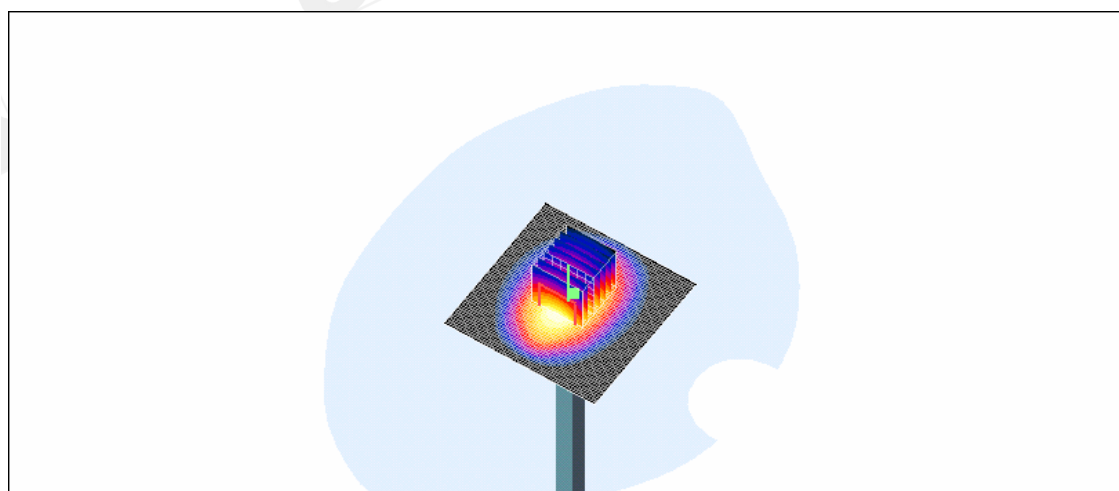

0 dB = 10.6mW/g

SAR System Performance Verification

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d027

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1800 & 1900 Medium parameters used (interpolated): $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.4, 4.4, 4.4); Calibrated: 2005/8/30
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2006/4/28
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

$P_{in}=250\text{mW}/\text{Area Scan (61x61x1)}$: Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 12.8 mW/g



$P_{in}=250\text{mW}/\text{Zoom Scan (7x7x7)}/\text{Cube 0}$: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 91.2 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 18.4 W/kg

$\text{SAR}(1 \text{ g}) = 10.1 \text{ mW/g}$; $\text{SAR}(10 \text{ g}) = 5.19 \text{ mW/g}$

Maximum value of SAR (measured) = 11.4 mW/g

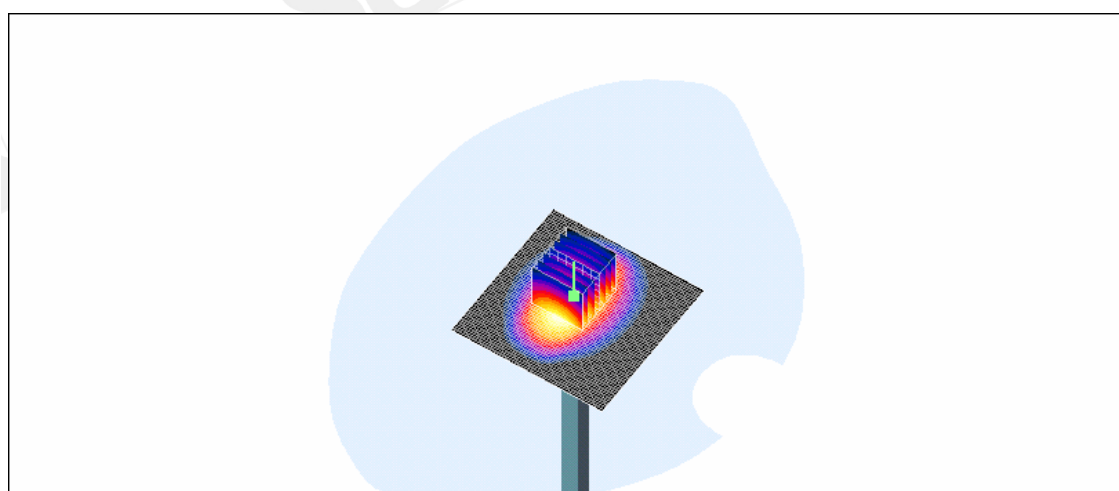

0 dB = 11.4mW/g