

Note:

1. Printing color: Black

MFG Factory:

- 1.亞瑟(CIS)----->BH
- 2.旭電Solectron(Shen Zhen)----->AZ
- 3.旭電Solectron(kaohsiung 高雄)--->AK
- 4.旭電Solectron(Singapore 新加坡)->AS
- 5.旭電Solectron(USA 美國)----->AU
- 6.智邦Accton(Shen zhen)----->AC
- 7.上海廣智SVA Accton(Shanghai)--->GZ


MFG Country:

Decide by import and export country
for example:

- 1. MADE IN TAIWAN
- 2. MADE IN CHINA

Vendor ID:

Decide by Vendor

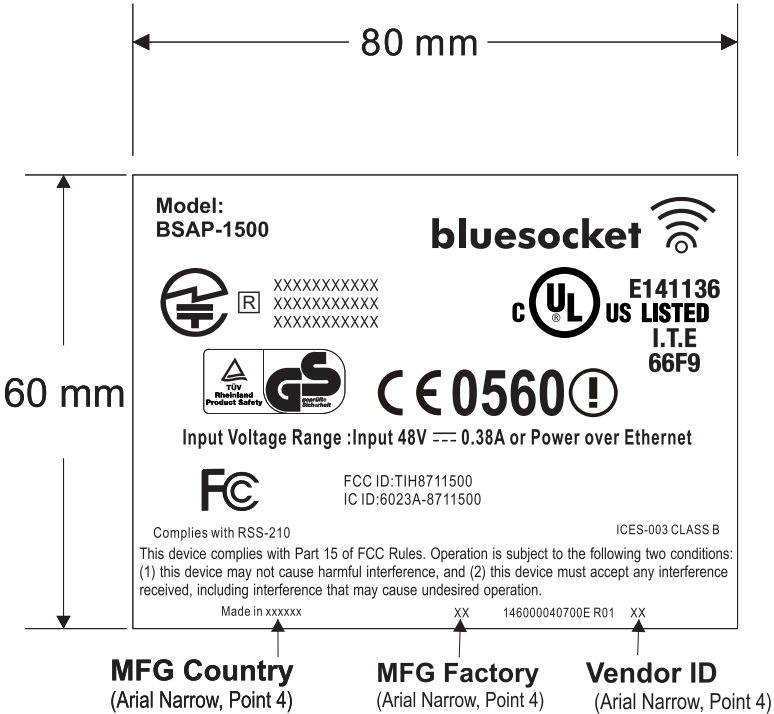

Modification		Card Paper / Top lineboard				Corrugate list				Die Cut Tolerance + / - 0.5 mm					PE Bag			Label list		(Total Thickness = 0.092 mm±10%)		Others			Accton TECHNOLOGY CORP.			
		GSM Paper CCNB SBS Double SBS				Flute (A Degree) Top lineboard Single wall/ Double wall GSM g/m (Top lineboard/Medium/Botton lineboard)				GRADE 0 1 2 3 4 5					No Static Anti-Static Electronic Bubble Single layer Double layer			Material & Thickness		Adhesive (Except all leds in FP label)		Material Spec:			Part No.146000040700E REV. 01			
						B E				16 63 163 250 500 1000					Thickness/mm 0.04 0.06 0.08			✓ Matelized 0.050mm / 50# / 2mil		✓ Acrylic UL approved T=0.022mm					Description: UL label EAP6628A-IL			
						A				250 500 1000					ESD Value/Ω _{ghm} 0.11 < 5			White Polyester 0.076mm / 75# / 3mil		"R" Adhesive T=0.022mm								
						AB				Printing Tolerance + / - mm					EPE Foam Density (kg / m³) 33 42 Other			(PP)Pepa paper 0.178mm / 7mil		Water Adhesive T=0.022mm								
										Cardboard Die Cut Legend					Laminated Non - laminated			PC 8B35 0.254mm / 10mil		3M 467 T=0.05mm / 2mil		Approve						
															Pulp Tray Weight/gs= ±-5%			PC 8010 0.381mm / 15mil		3M 468 T=0.127mm / 5mil		Check						
															Thickness/mm 1.5 2.0 Other			Other 0.500mm / 20mil		3M 7945 T=0.127mm / 5mil		Design Melody 07.01.05						
		Coated UV Mar Resistant Varnish				Bursting Strength (Kgf / cm²)												PP Film ✓ LF (T = 0.045mm)		DF (T = 0.035mm)					UNIT (IN) SCALE 1 / 1 SIZE A3			
		PP Film LF(T=0.15mm) DF(T=0.18mm)				8 14 16 18 Other																			MM Outside View Sheet 1 of 1			