

FCC TEST REPORT (15.407)

REPORT NO.: RF941122H03

MODEL NO.: BSAP-1540

RECEIVED: Nov. 25, 2005

TESTED: Dec. 05 to 21, 2005

ISSUED: Dec. 23, 2005

APPLICANT: Bluesocket, Inc.

ADDRESS: 10 North Avenue Burlington, MA 01803

ISSUED BY: Advance Data Technology Corporation

TEST LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 82 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0536

ILAC MRA



No. 2177-01

Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS	16
4.1	CONDUCTED EMISSION MEASUREMENT	16
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2	TEST INSTRUMENTS.....	16
4.1.3	TEST PROCEDURES	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP	18
4.1.6	EUT OPERATING CONDITIONS	18
4.1.7	TEST RESULTS	19
4.2	RADIATED EMISSION MEASUREMENT	23
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	24
4.2.3	TEST INSTRUMENTS.....	25
4.2.4	TEST PROCEDURES	26
4.2.5	DEVIATION FROM TEST STANDARD	26
4.2.6	TEST SETUP	27
4.2.7	EUT OPERATING CONDITION	27
4.2.8	TEST RESULTS (ANTENNA 1)	28
4.2.9	TEST RESULTS (ANTENNA 2)	32
4.2.10	TEST RESULTS (ANTENNA 3)	36
4.3	PEAK TRANSMIT POWER MEASUREMENT	40
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	40
4.3.2	TEST INSTRUMENTS.....	40

4.3.3	TEST PROCEDURE.....	41
4.3.4	DEVIATION FROM TEST STANDARD	41
4.3.5	TEST SETUP	41
4.3.6	EUT OPERATING CONDITIONS	41
4.3.7	TEST RESULTS	42
4.4	PEAK POWER EXCURSION MEASUREMENT	45
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	45
4.4.2	TEST INSTRUMENTS.....	45
4.4.3	TEST PROCEDURE.....	46
4.4.4	DEVIATION FROM TEST STANDARD	46
4.4.5	TEST SETUP	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.4.8	TEST RESULTS	47
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURES	50
4.5.4	DEVIATION FROM TEST STANDARD	50
4.5.5	TEST SETUP	50
4.5.6	EUT OPERATING CONDITIONS	50
4.5.7	TEST RESULTS	51
4.6	FREQUENCY STABILITY.....	53
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	53
4.6.2	TEST INSTRUMENTS.....	53
4.6.3	TEST PROCEDURE.....	53
4.6.4	DEVIATION FROM TEST STANDARD	54
4.6.5	TEST SETUP	54
4.6.6	EUT OPERATING CONDITION.....	54
4.6.7	TEST RESULTS	55
4.7	BAND EDGES MEASUREMENT.....	56
4.7.1	TEST INSTRUMENTS.....	56
4.7.2	TEST PROCEDURE.....	56
4.7.3	EUT OPERATING CONDITION.....	56



4.7.4 TEST RESULTS (ANTENNA 1) 57

4.7.5 TEST RESULTS (ANTENNA 2) 62

4.7.6 TEST RESULTS (ANTENNA 3) 67

4.8 ANTENNA REQUIREMENT 72

4.8.1 STANDARD APPLICABLE.....72

4.8.2 ANTENNA CONNECTED CONSTRUCTION.....72

5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....73

6. INFORMATION ON THE TESTING LABORATORIES 81

APPENDIX-A A-1

1. CERTIFICATION

PRODUCT: Bluesocket 1540 Access Point
BRAND NAME: Bluesocket
MODEL NO.: BSAP-1540
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Dec. 05 to 21, 2005
APPLICANT: Bluesocket, Inc.
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment (Model: BSAP-1540) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** Dec. 23, 2005
(Carol Liao)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Dec. 23, 2005
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** Dec. 23, 2005
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.88dB at 0.478MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.70dB at 5350.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

NOTE:

1. The EUT was operating in 2.412 ~ 2.462GHz, 5.250 ~ 5.350GHz and 5.725 ~ 5.850GHz frequencies band. This report was recorded the RF parameters including 5.250 ~ 5.350GHz. For the 2.412 ~ 2.462GHz and 5.725 ~ 5.850GHz RF parameters was recorded in another test report.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Bluesocket 1540 Access Point
MODEL NO.	BSAP-1540
POWER SUPPLY	DC 48V from power adapter or POE (Power over Ethernet)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.25 ~ 5.35GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 13
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz for Normal mode
OUTPUT POWER	802.11b: 138.038mW 802.11g: 245.471mW 802.11a: 251.189mW
DATA CABLE	NA
ANTENNA TYPE	Please see note 3 (on next page)
I/O PORTS	RS232 Port x 1, POE port x 1, DC power Port x 1
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.

2. The EUT was operated with the following power adapter or POE(Power Over Ethernet):

ADAPTER	
BRAND:	PHIHONG
MODEL:	PSA 18U-480C
INPUT:	AC 100~240V, 0.5A, 50~60Hz
OUTPUT:	DC 48V, 0.38A , 1.5m/ nonshield/ with one core

POE (for test only)	
BRAND:	3Com
MODEL:	PW130
INPUT:	AC100-250V, 0.5A, 50/60Hz
OUTPUT:	DC 48V, 0.42A

3. There are five antennas provided to this EUT, please refer to the following table:

For 2.4GHz				
No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1	S2403BPX	5 dBi	2.400-2.500 GHz Special Purpose Omni Antenna	Reverse SMA
2	SR2405135D/ SR24135DA	5 dBi	PCS/DCS and 2.4 GHz Wide Angle Coverage Directional Antennas	Reverse SMA
3	S24493DS	3 dBi	Dual Band, Tri-mode 802.11b/a/g Spatial Diversity Omnidirectional Antenna	Reverse SMA
4	S24497P	7 dBi	Dual Band, Tri-mode Directional Antenna	Reverse SMA
5	FDS_2FED01+I3G	3 dBi	Dual Band Antenna, Dipole	MMCX
For 5GHz				
No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1	S24493DS	3 dBi	Dual Band, Tri-mode 802.11b/a/g Spatial Diversity Omnidirectional Antenna	Reverse SMA
2	S24497P	8 dBi	Dual Band, Tri-mode Directional Antenna	Reverse SMA
3	FDS_2FED01+I3G	5 dBi	Dual Band Antenna, Dipole	MMCX
Note:				
1. All of the above antennas are outdoor Antenna except the antenna model No.: FDS_2FED01+I3G.				

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5250MHz ~ 5350MHz bands:

Four channels are provided to this EUT for normal mode.

Channel	Frequency
1	5260 MHz
2	5280 MHz
3	5300 MHz
4	5320 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	X	X	X	X	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 4	4	OFDM	BPSK	6

- ☒ EUT was tested with the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 4	4	OFDM	BPSK	6

- ☒ EUT was tested with the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 4	1, 4	OFDM	BPSK	6

- ☒ EUT was pre-tested in chamber as the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Mode 1, the worst case one, was chosen for final test.

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 4	1, 4	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	1 to 4	1, 4	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluesocket 1540 Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP01L	TW-09c748- 12800-165-3171	FCC DoC
2	Terminal Resistor	SUHNER	50 Ohm	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

With ADAPTER: (5GHz Band)

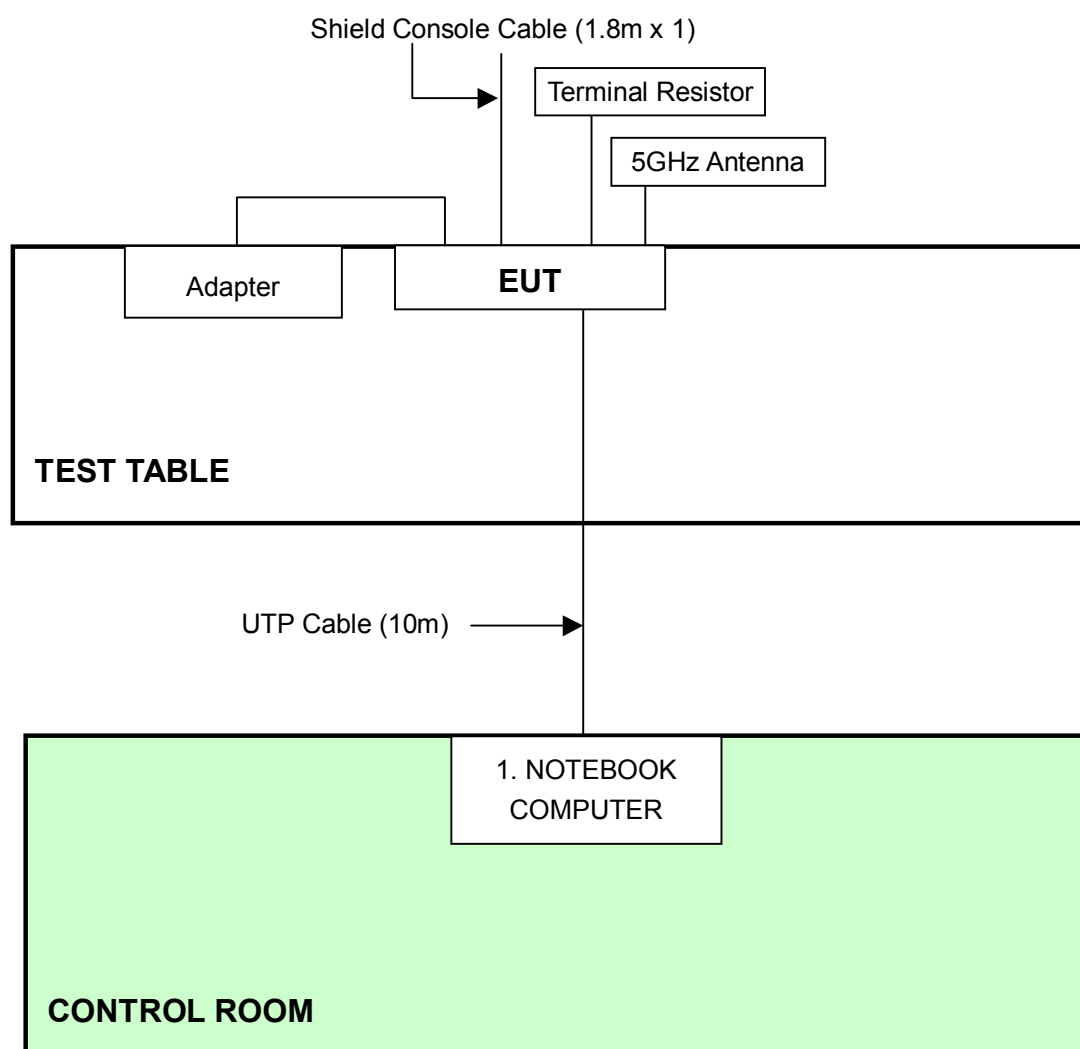

NOTE: 1. Support unit 1 was kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 6 also.

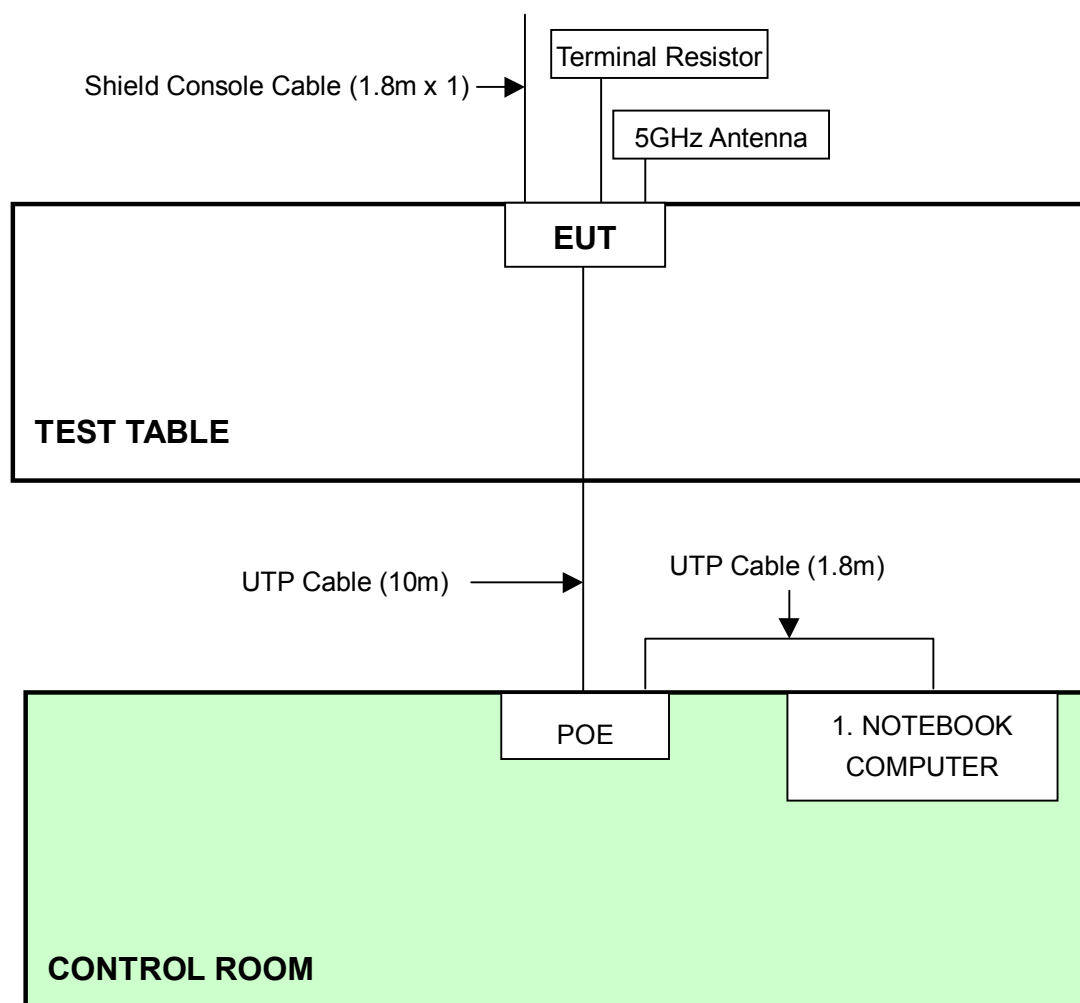With POE : (5GHz Band)

NOTE: 1. Support unit 1 was kept in the control room during the test.
2. Please refer to the photos of test configuration in Item 6 also.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Dec. 14, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100072	Oct. 05, 2006
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 19, 2006
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 19, 2006
Terminator(for KYORITSU)	50	1	Oct. 08, 2006
Software	Cond-V2e	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. The measurement uncertainty is 2.53 dB, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

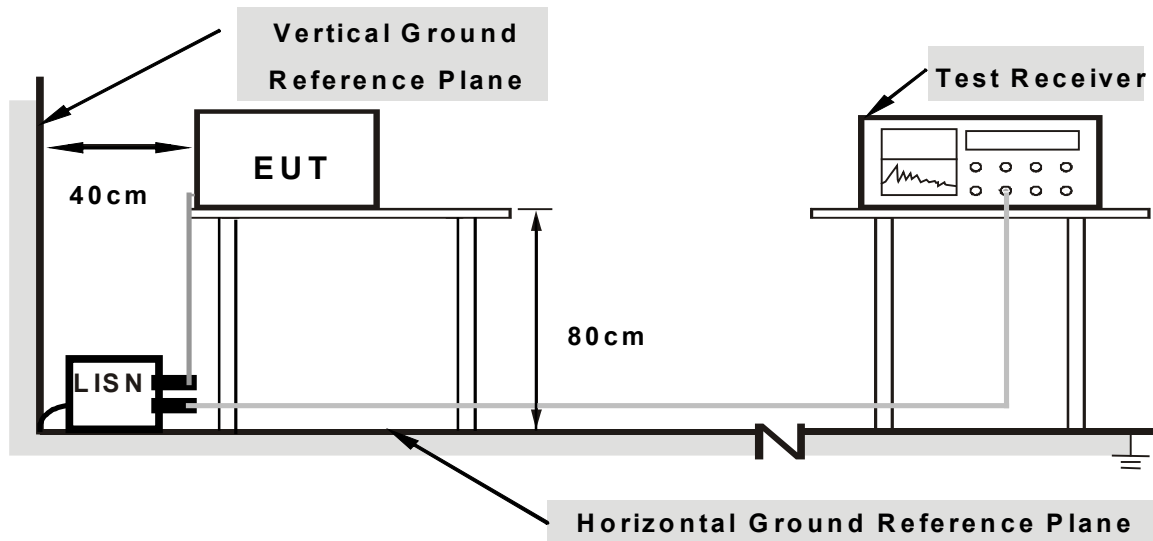

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared other computer systems to act as a communication partner and placed them outside of testing area.
- c. The communication partner run test program “ART48 Build 10” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable.


4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120VAC, 60 HZ	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	0.60	47.17	-	47.77	-	61.08	51.08	-13.31	-
2	0.420	0.60	44.63	-	45.23	-	57.46	47.46	-12.22	-
3	0.560	0.63	43.18	-	43.81	-	56.00	46.00	-12.19	-
4	1.236	0.70	41.45	-	42.15	-	56.00	46.00	-13.85	-
5	1.677	0.70	39.75	-	40.45	-	56.00	46.00	-15.55	-
6	5.316	0.94	39.54	-	40.48	-	60.00	50.00	-19.52	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

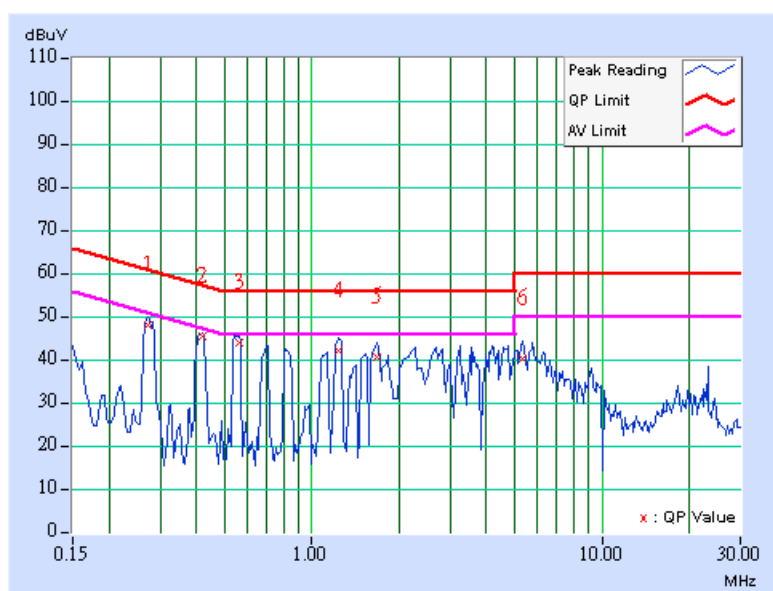

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	0.40	46.89	-	47.29	-	61.08	51.08	-13.79	-
2	0.416	0.41	44.43	-	44.84	-	57.54	47.54	-12.70	-
3	0.564	0.45	42.60	-	43.05	-	56.00	46.00	-12.95	-
4	0.681	0.49	41.05	-	41.54	-	56.00	46.00	-14.46	-
5	1.228	0.60	40.69	-	41.29	-	56.00	46.00	-14.71	-
6	5.000	0.87	34.46	-	35.33	-	56.00	46.00	-20.67	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

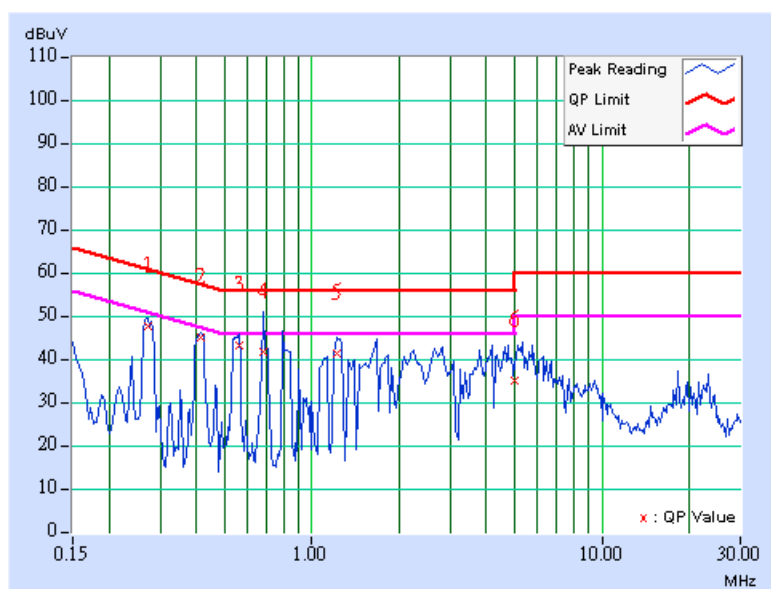

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120VAC, 60 HZ	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	39.08	-	48.88	-	63.42	53.42	-14.54	-
2	0.271	9.80	34.87	-	44.67	-	61.08	51.08	-16.41	-
3	0.500	9.82	3.84	-	13.66	-	56.00	46.00	-42.34	-
4	0.955	9.89	33.08	-	42.97	-	56.00	46.00	-13.03	-
5	2.045	9.90	32.13	-	42.03	-	56.00	46.00	-13.97	-
6	15.141	10.10	30.73	-	40.83	-	60.00	50.00	-19.17	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

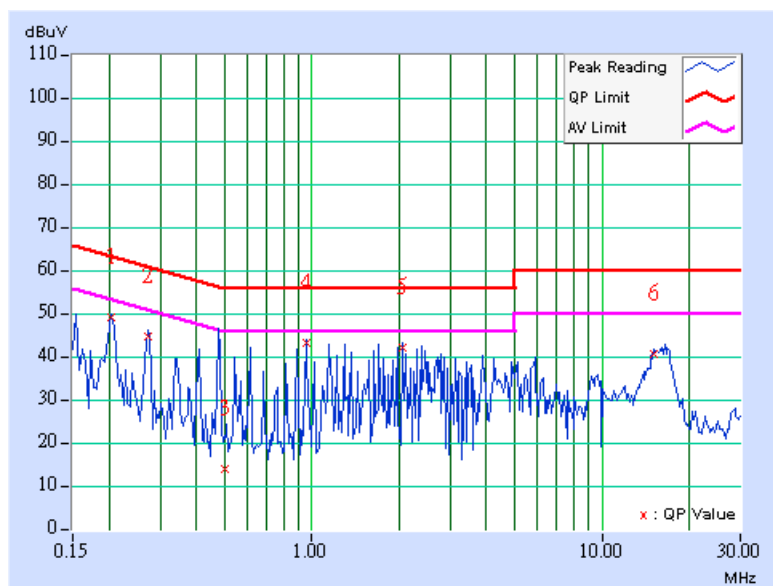

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	38.91	-	48.71	-	63.42	53.42	-14.71	-
2	0.478	9.81	37.75	34.68	47.56	44.49	56.37	46.37	-8.81	-1.88
3	0.615	9.84	32.53	-	42.37	-	56.00	46.00	-13.63	-
4	0.955	9.89	34.41	-	44.30	-	56.00	46.00	-11.70	-
5	1.978	10.00	32.91	-	42.91	-	56.00	46.00	-13.09	-
6	16.383	10.26	30.34	-	40.60	-	60.00	50.00	-19.40	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

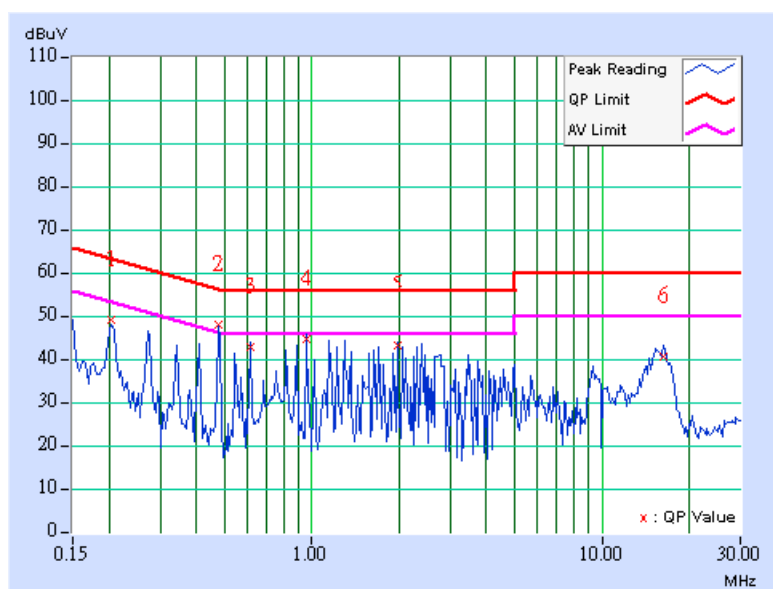

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100287	Dec. 08, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 21, 2005
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 30, 2006
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Nov. 16, 2006
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Jul. 16, 2006
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

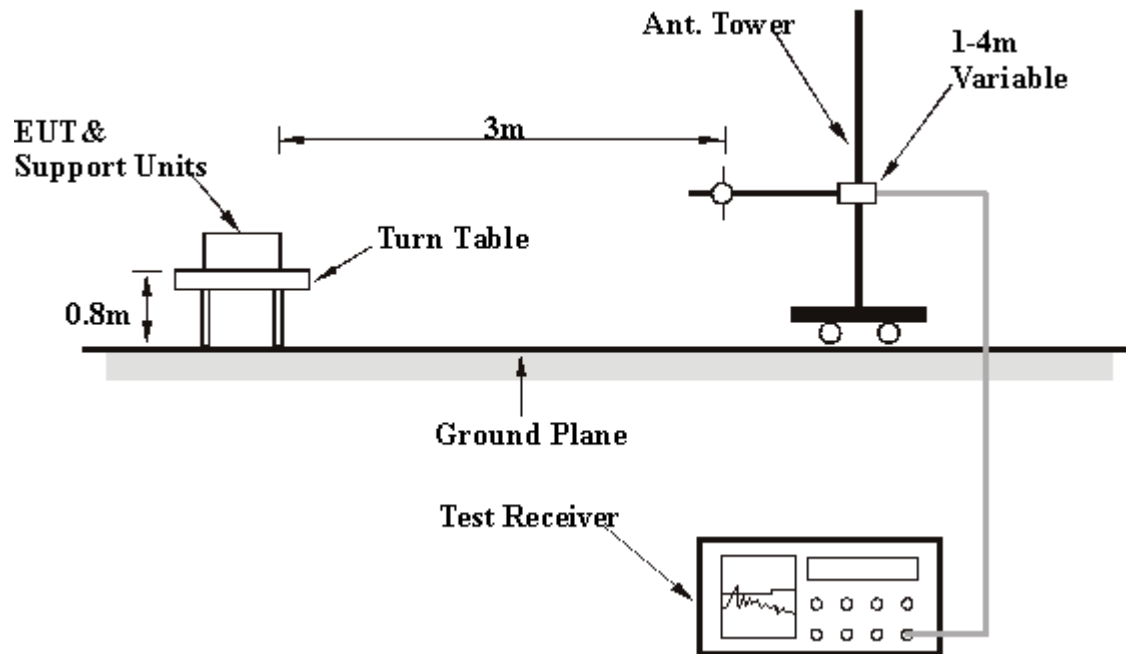

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS (ANTENNA 1)

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With Adapter	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.00	22.30 QP	43.50	-21.20	1.24 H	133	8.90	13.40
2	250.00	21.40 QP	46.00	-24.60	1.38 H	205	8.10	13.30
3	500.04	32.40 QP	46.00	-13.60	1.08 H	307	11.50	20.90
4	625.00	28.60 QP	46.00	-17.40	1.08 H	222	4.80	23.80
5	800.01	35.80 QP	46.00	-10.20	1.20 H	232	9.20	26.60
6	900.00	36.20 QP	46.00	-9.80	1.08 H	196	8.30	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.01	26.60 QP	43.50	-16.90	1.08 V	196	13.20	13.40
2	250.00	27.60 QP	46.00	-18.40	1.01 V	64	14.30	13.30
3	500.00	32.50 QP	46.00	-13.50	1.30 V	62	11.60	20.90
4	625.02	29.60 QP	46.00	-16.40	1.28 V	162	5.80	23.80
5	800.00	36.20 QP	46.00	-9.80	1.02 V	163	9.60	26.60
6	900.00	33.90 QP	46.00	-12.10	1.08 V	143	6.00	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With POE	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.00	21.90 QP	43.50	-21.60	1.52 H	13	8.50	13.40
2	250.02	21.10 QP	46.00	-24.90	1.34 H	182	7.80	13.30
3	500.00	31.10 QP	46.00	-14.90	1.30 H	163	10.20	20.90
4	625.00	27.60 QP	46.00	-18.40	1.27 H	142	3.80	23.80
5	800.00	36.00 QP	46.00	-10.00	1.32 H	265	9.40	26.60
6	900.00	35.40 QP	46.00	-10.60	1.23 H	208	7.50	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.03	25.30 QP	43.50	-18.20	1.02 V	154	11.90	13.40
2	250.04	27.10 QP	46.00	-18.90	1.35 V	102	13.80	13.30
3	500.03	28.10 QP	46.00	-17.90	1.34 V	96	7.20	20.90
4	625.00	28.60 QP	46.00	-17.40	2.21 V	113	4.80	23.80
5	800.00	32.20 QP	46.00	-13.80	1.24 V	103	5.60	26.60
6	900.01	31.20 QP	46.00	-14.80	1.52 V	128	3.30	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	46.60 PK	74.00	-27.40	1.31 H	309	10.80	35.80
1	#5150.00	37.30 AV	54.00	-16.70	1.31 H	309	1.50	35.80
2	*5260.00	105.10 PK			1.31 H	309	69.30	35.80
2	*5260.00	96.80 AV			1.31 H	309	61.00	35.80
3	10520.00	49.10 PK	68.30	-19.20	1.18 H	8	4.40	44.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	49.40 PK	74.00	-24.60	2.04 V	20	13.60	35.80
1	#5150.00	40.10 AV	54.00	-13.90	2.04 V	20	4.30	35.80
2	*5260.00	107.90 PK			2.04 V	20	72.10	35.80
2	*5260.00	99.60 AV			2.04 V	20	63.80	35.80
3	10520.00	48.30 PK	68.30	-20.00	1.25 V	4	3.60	44.70

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#” The radiated frequency falling in the restricted band.

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	103.10 PK			1.31 H	307	67.30	35.80
1	*5320.00	95.00 AV			1.31 H	307	59.20	35.80
2	#5350.00	53.50 PK	74.00	-20.50	1.31 H	307	17.70	35.80
2	#5350.00	43.50 AV	54.00	-10.50	1.31 H	307	7.80	35.80
3	#10640.00	51.40 PK	74.00	-22.60	1.14 H	61	5.60	45.90
3	#10640.00	41.20 AV	54.00	-12.80	1.14 H	61	-4.70	45.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.80 PK			1.99 V	11	69.00	35.80
1	*5320.00	96.40 AV			1.99 V	11	60.60	35.80
2	#5350.00	55.20 PK	74.00	-18.80	1.99 V	11	19.40	35.80
2	#5350.00	44.90 AV	54.00	-9.10	1.99 V	11	9.20	35.80
3	#10640.00	51.30 PK	74.00	-22.70	1.12 V	20	5.50	45.90
3	#10640.00	40.80 AV	54.00	-13.20	1.12 V	20	-5.10	45.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

4.2.9 TEST RESULTS (ANTENNA 2)

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With Adapter	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.01	19.10 QP	43.50	-24.40	1.38 H	175	5.60	13.40
2	250.01	20.30 QP	46.00	-25.70	1.43 H	241	7.00	13.30
3	500.02	31.10 QP	46.00	-14.90	1.33 H	321	10.20	20.90
4	625.05	28.40 QP	46.00	-17.60	1.44 H	218	4.60	23.80
5	799.98	35.20 QP	46.00	-10.80	1.17 H	192	8.60	26.60
6	900.01	37.40 QP	46.00	-8.60	1.05 H	204	9.50	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.00	27.90 QP	43.50	-15.60	1.17 V	278	14.40	13.40
2	250.03	26.60 QP	46.00	-19.40	1.09 V	38	13.30	13.30
3	500.01	34.70 QP	46.00	-11.30	1.03 V	48	13.80	20.90
4	625.01	28.20 QP	46.00	-17.80	1.21 V	238	4.40	23.80
5	800.00	38.40 QP	46.00	-7.60	1.05 V	141	11.80	26.60
6	900.01	35.60 QP	46.00	-10.40	1.02 V	163	7.70	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With POE	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.00	18.90 QP	43.50	-24.60	2.12 H	198	5.50	13.40
2	250.00	18.70 QP	46.00	-27.30	2.25 H	355	5.40	13.30
3	500.00	30.20 QP	46.00	-15.80	2.22 H	181	9.30	20.90
4	625.01	28.90 QP	46.00	-17.10	1.77 H	184	5.10	23.80
5	800.00	36.70 QP	46.00	-9.30	1.31 H	198	10.10	26.60
6	900.00	37.30 QP	46.00	-8.70	1.18 H	206	9.50	27.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	21.10 QP	43.50	-22.40	1.03 V	220	9.20	11.90
2	150.00	25.90 QP	43.50	-17.60	1.00 V	191	12.40	13.40
3	250.01	26.10 QP	46.00	-19.90	1.11 V	237	12.80	13.30
4	500.01	32.50 QP	46.00	-13.50	1.12 V	328	11.60	20.90
5	625.01	28.50 QP	46.00	-17.50	1.00 V	23	4.80	23.80
6	800.00	37.20 QP	46.00	-8.80	1.44 V	132	10.60	26.60
7	900.00	31.50 QP	46.00	-14.50	1.91 V	132	3.60	27.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	43.30 PK	74.00	-30.70	1.12 H	335	7.50	35.80
1	#5150.00	33.60 AV	54.00	-20.40	1.12 H	335	-2.20	35.80
2	*5260.00	101.80 PK			1.12 H	335	66.10	35.80
2	*5260.00	93.10 AV			1.12 H	335	57.30	35.80
3	10520.00	45.90 PK	68.30	-22.40	1.25 H	30	1.20	44.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	56.20 PK	74.00	-17.80	1.05 V	5	20.40	35.80
1	#5150.00	46.70 AV	54.00	-7.30	1.05 V	5	10.90	35.80
2	*5260.00	114.70 PK			1.05 V	5	79.00	35.80
2	*5260.00	106.20 AV			1.05 V	5	70.40	35.80
3	10520.00	47.20 PK	68.30	-21.10	1.00 V	44	2.50	44.70

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#” The radiated frequency falling in the restricted band.

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	98.40 PK			1.10 H	333	62.60	35.80
1	*5320.00	90.20 AV			1.10 H	333	54.50	35.80
2	#5350.00	46.10 PK	74.00	-27.90	1.10 H	333	10.30	35.80
2	#5350.00	38.70 AV	54.00	-15.30	1.10 H	333	3.00	35.80
3	#10640.00	50.00 PK	74.00	-24.00	1.20 H	12	4.10	45.90
3	#10640.00	38.50 AV	54.00	-15.50	1.20 H	12	-7.40	45.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.00 PK			1.04 V	4	77.30	35.80
1	*5320.00	104.80 AV			1.04 V	4	69.00	35.80
2	#5350.00	60.50 PK	74.00	-13.50	1.04 V	4	24.80	35.80
2	#5350.00	53.30 AV	54.00	-0.70	1.04 V	4	17.60	35.80
3	#10640.00	49.90 PK	74.00	-24.10	4.00 V	5	4.00	45.90
3	#10640.00	38.70 AV	54.00	-15.30	4.00 V	5	-7.20	45.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

4.2.10 TEST RESULTS (ANTENNA 3)

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With Adapter	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	24.00 QP	46.00	-22.00	1.77 H	333	10.70	13.30
2	300.00	23.40 QP	46.00	-22.60	1.26 H	358	7.10	16.30
3	375.00	26.40 QP	46.00	-19.60	1.00 H	208	8.80	17.60
4	500.00	26.30 QP	46.00	-19.70	1.01 H	177	5.40	20.90
5	792.00	36.80 QP	46.00	-9.20	1.01 H	309	10.20	26.60
6	891.00	39.20 QP	46.00	-6.80	1.07 H	269	11.40	27.80
7	924.00	38.10 QP	46.00	-7.90	1.04 H	258	9.70	28.40
8	990.00	40.10 QP	54.00	-13.90	1.00 H	267	11.10	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.98	25.20 QP	40.00	-14.80	1.10 V	254	11.00	14.20
2	250.00	28.70 QP	46.00	-17.30	1.10 V	254	15.40	13.30
3	500.00	26.10 QP	46.00	-19.90	1.22 V	195	5.20	20.90
4	792.00	33.50 QP	46.00	-12.50	1.09 V	107	6.90	26.60
5	858.00	33.80 QP	46.00	-12.20	1.19 V	39	6.20	27.50
6	891.00	38.80 QP	46.00	-7.20	1.20 V	113	11.00	27.80
7	924.00	37.50 QP	46.00	-8.50	1.00 V	1	9.10	28.40
8	990.00	37.80 QP	54.00	-16.20	1.06 V	176	8.90	28.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
TEST MODE	With POE	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	22.50 QP	46.00	-23.50	1.68 H	218	9.20	13.30
2	300.00	24.00 QP	46.00	-22.00	1.09 H	191	7.70	16.30
3	375.00	25.40 QP	46.00	-20.60	1.00 H	193	7.80	17.60
4	500.00	27.30 QP	46.00	-18.70	1.00 H	207	6.40	20.90
5	792.00	35.90 QP	46.00	-10.10	1.26 H	268	9.30	26.60
6	891.00	39.90 QP	46.00	-6.10	1.05 H	272	12.10	27.80
7	924.00	38.50 QP	46.00	-7.50	1.05 H	264	10.20	28.40
8	990.00	39.80 QP	54.00	-14.20	1.00 H	264	10.90	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.10	31.70 QP	40.00	-8.30	1.00 V	339	17.50	14.20
2	250.00	26.00 QP	46.00	-20.00	1.00 V	339	12.70	13.30
3	500.00	25.50 QP	46.00	-20.50	1.21 V	210	4.60	20.90
4	792.00	35.00 QP	46.00	-11.00	1.24 V	314	8.40	26.60
5	858.00	33.10 QP	46.00	-12.90	1.37 V	51	5.60	27.50
6	891.00	37.80 QP	46.00	-8.20	1.14 V	67	10.00	27.80
7	924.00	38.10 QP	46.00	-7.90	1.03 V	1	9.70	28.40
8	990.00	36.70 QP	54.00	-17.30	1.00 V	144	7.80	28.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	42.00 PK	74.00	-32.00	1.39 H	104	6.20	35.80
1	#5150.00	31.70 AV	54.00	-22.30	1.39 H	104	-4.10	35.80
2	*5260.00	100.50 PK			1.39 H	104	64.70	35.80
2	*5260.00	91.20 AV			1.39 H	104	55.40	35.80
3	10520.00	62.40 PK	68.30	-5.90	1.33 H	215	17.70	44.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5150.00	52.30 PK	74.00	-21.70	1.01 V	294	16.50	35.80
1	#5150.00	42.80 AV	54.00	-11.20	1.01 V	294	7.00	35.80
2	*5260.00	110.80 PK			1.01 V	294	75.00	35.80
2	*5260.00	102.30 AV			1.01 V	294	66.50	35.80
3	10520.00	61.50 PK	68.30	-6.80	1.34 V	241	16.80	44.70

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#” The radiated frequency falling in the restricted band.

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	17deg. C, 59%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	99.20 PK			1.35 H	273	63.40	35.80
1	*5320.00	90.00 AV			1.35 H	273	54.20	35.80
2	#5350.00	49.60 PK	74.00	-24.40	1.35 H	273	13.80	35.80
2	#5350.00	38.50 AV	54.00	-15.50	1.35 H	273	2.80	35.80
3	#10640.00	61.30 PK	74.00	-12.70	1.44 H	263	15.40	45.90
3	#10640.00	49.70 AV	54.00	-4.30	1.44 H	263	3.80	45.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.60 PK			1.10 V	291	73.80	35.80
1	*5320.00	101.40 AV			1.10 V	291	65.60	35.80
2	#5350.00	60.00 PK	68.30	-8.30	1.10 V	291	24.20	35.80
2	#5350.00	49.90 AV	54.00	-4.10	1.10 V	291	14.20	35.80
3	#10640.00	61.50 PK	74.00	-12.50	1.27 V	296	15.60	45.90
3	#10640.00	49.80 AV	54.00	-4.20	1.27 V	296	3.90	45.90

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS


802.11a OFDM modulation

EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg.C, 50%RH, 980hPa
TESTED BY	Moris Lin		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5260	21.66	22	30.4	PASS
4	5320	19.94	22	26.3	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.


Peak Power Output: CH1

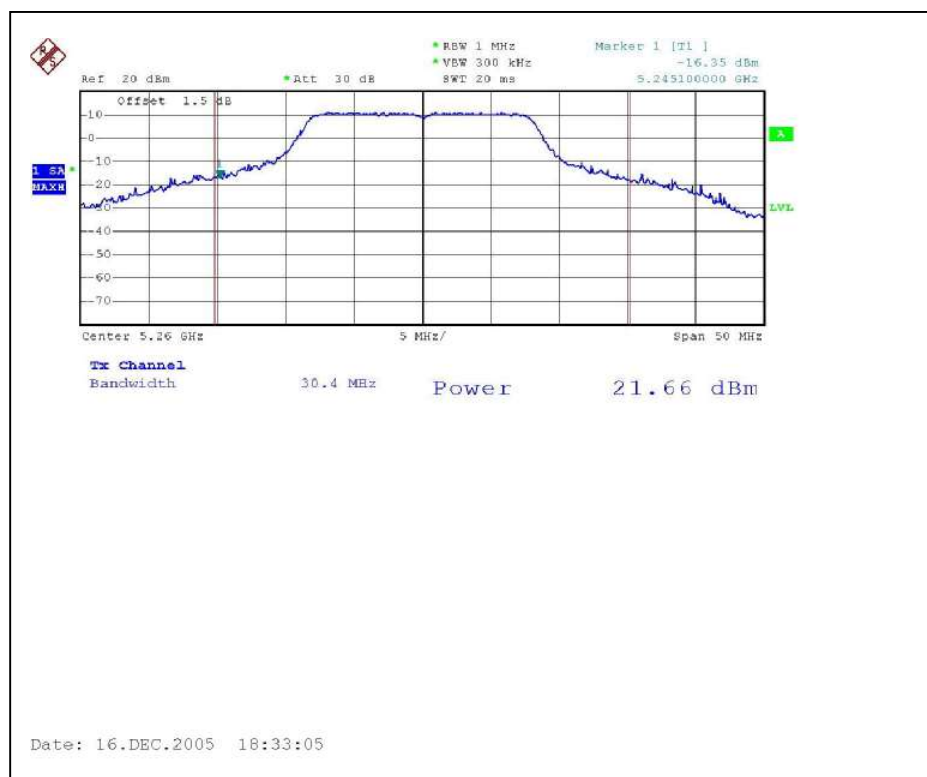


CH4

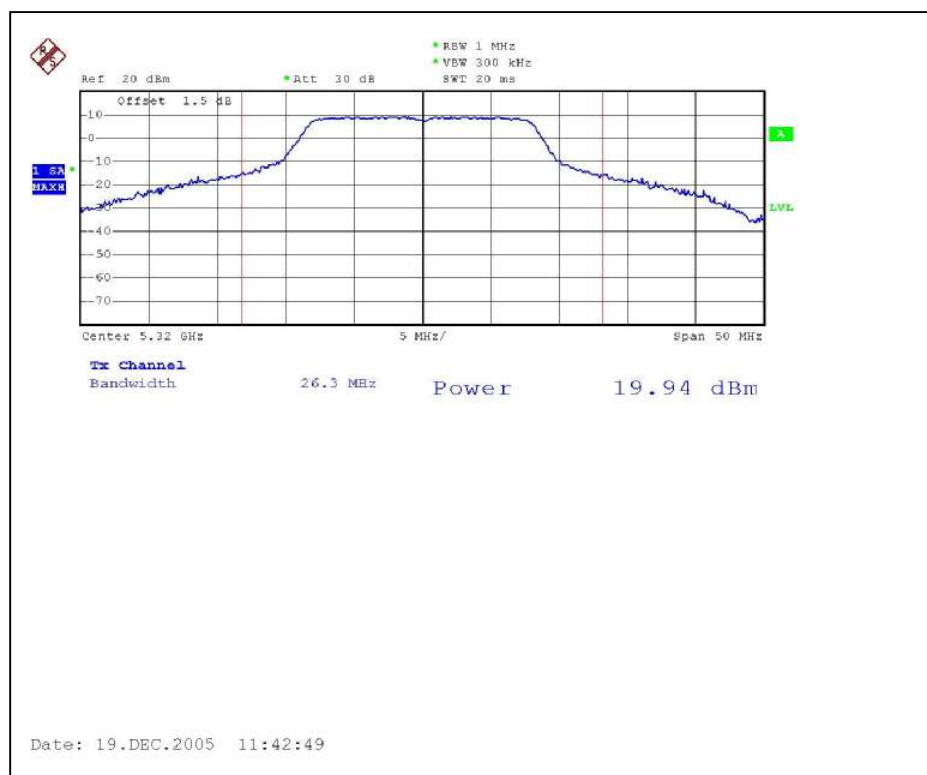

26dB Occupied Bandwidth: CH1

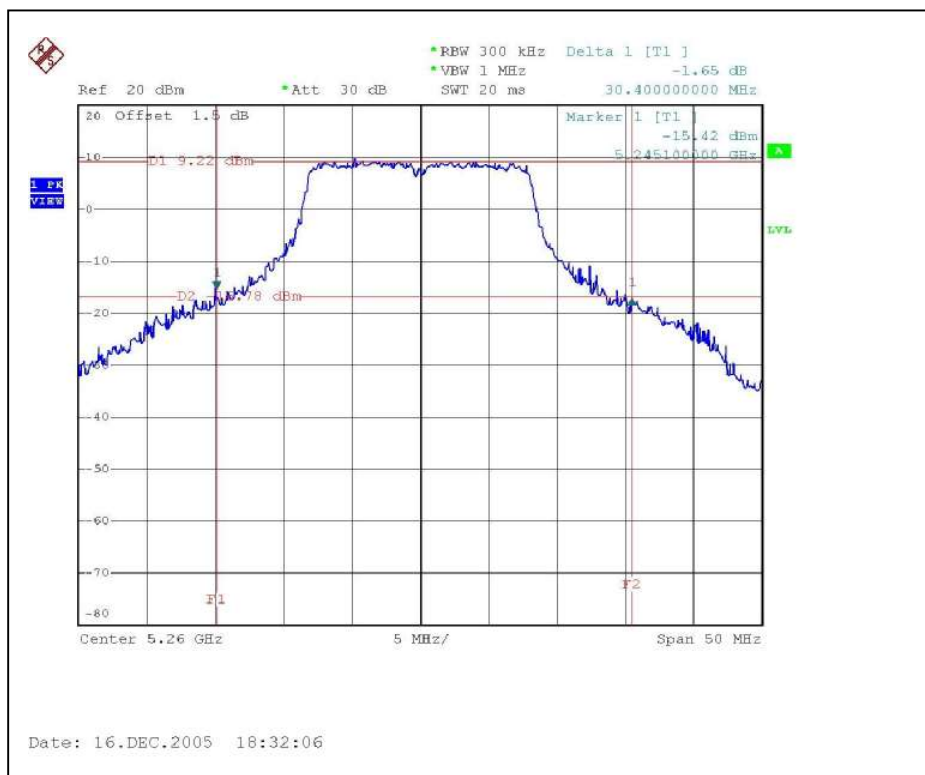

CH4

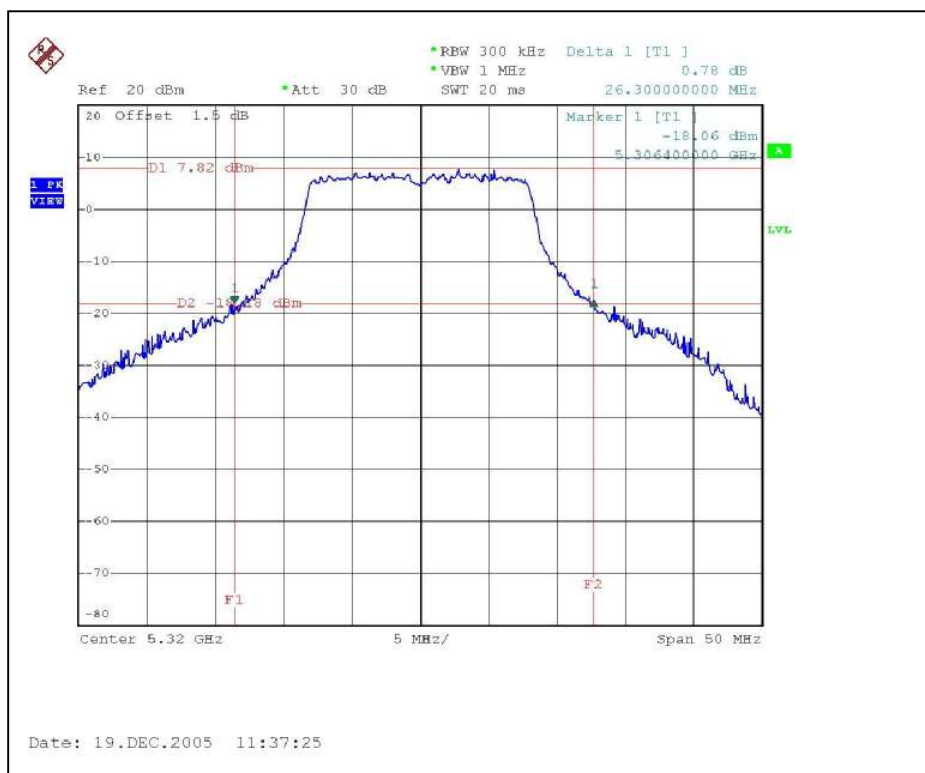

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS


4.4.8 TEST RESULTS

802.11a OFDM modulation


EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg.C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5260	7.27	13	PASS
4	5320	7.02	13	PASS

CH1

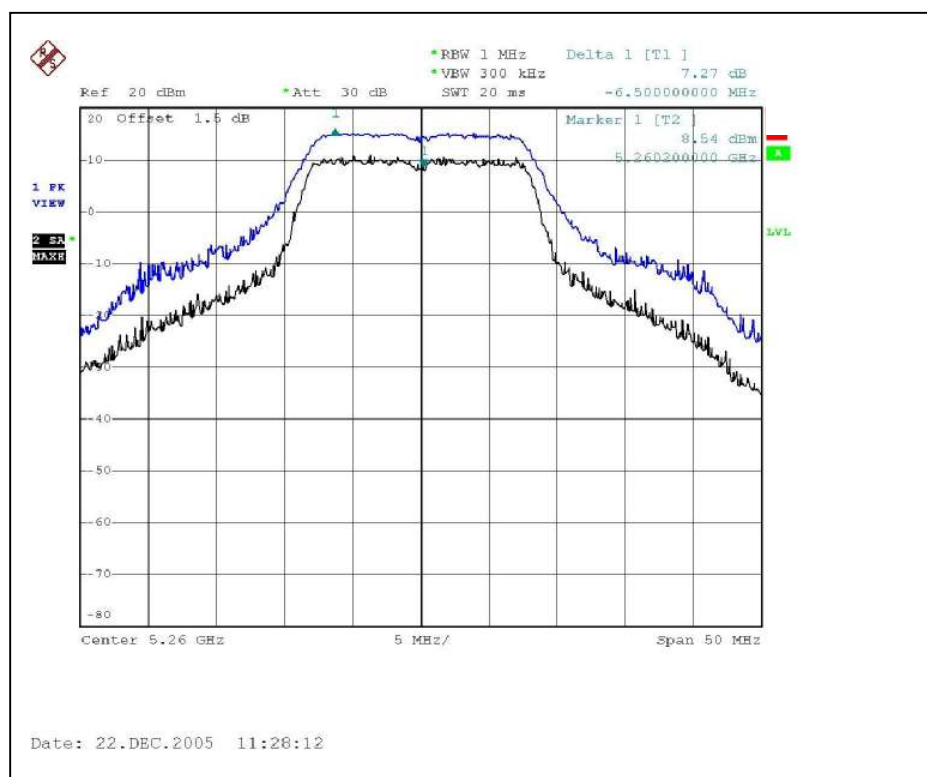

CH4

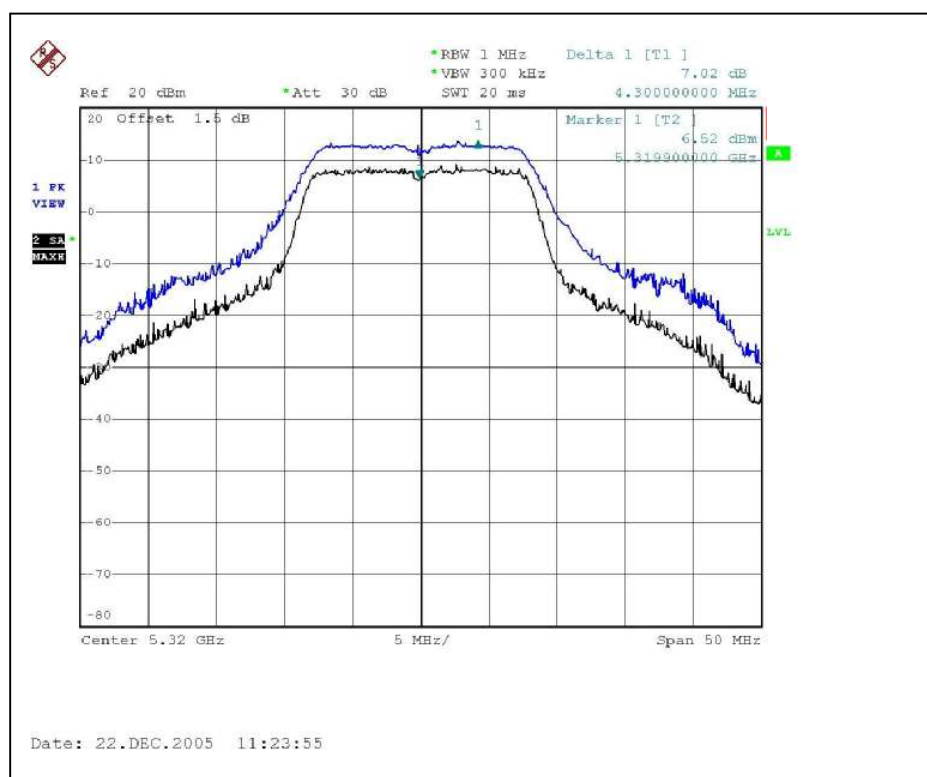

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


4.5.7 TEST RESULTS

802.11a OFDM modulation


EUT	Bluesocket 1540 Access Point	MODEL	BSAP-1540
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg.C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5260	4.98	9	PASS
4	5320	2.89	9	PASS

CH1

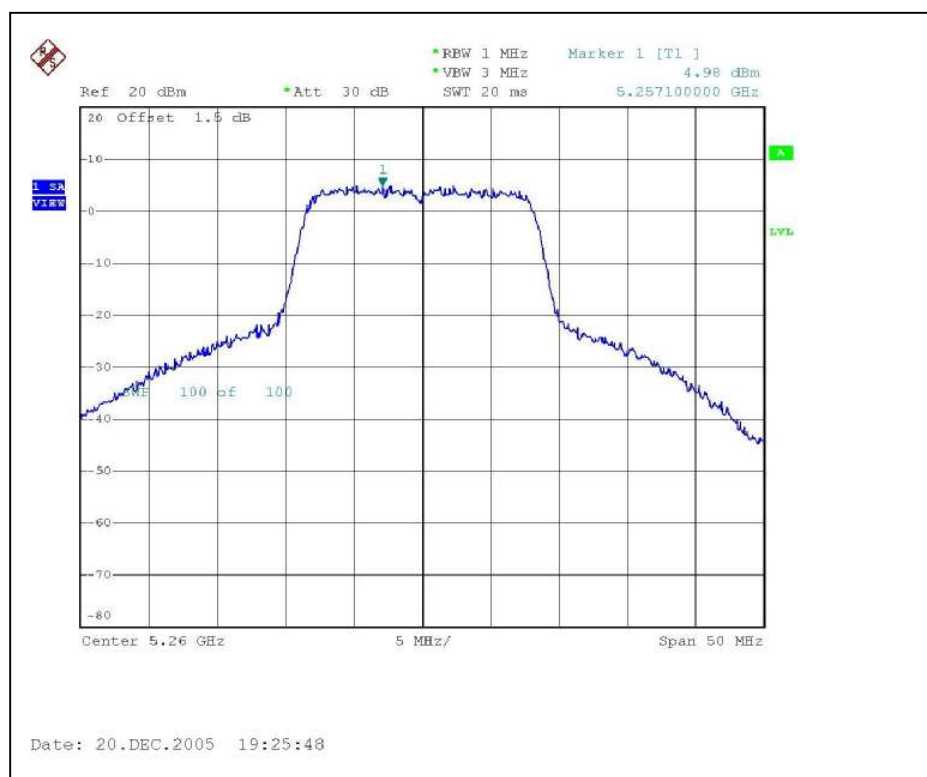

CH4

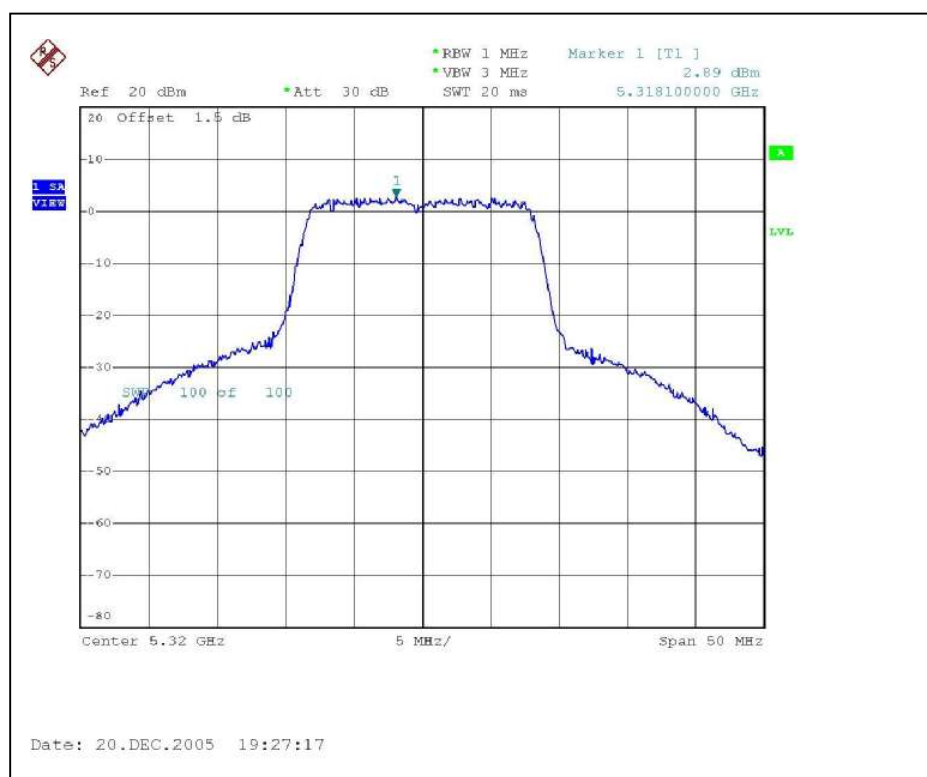

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

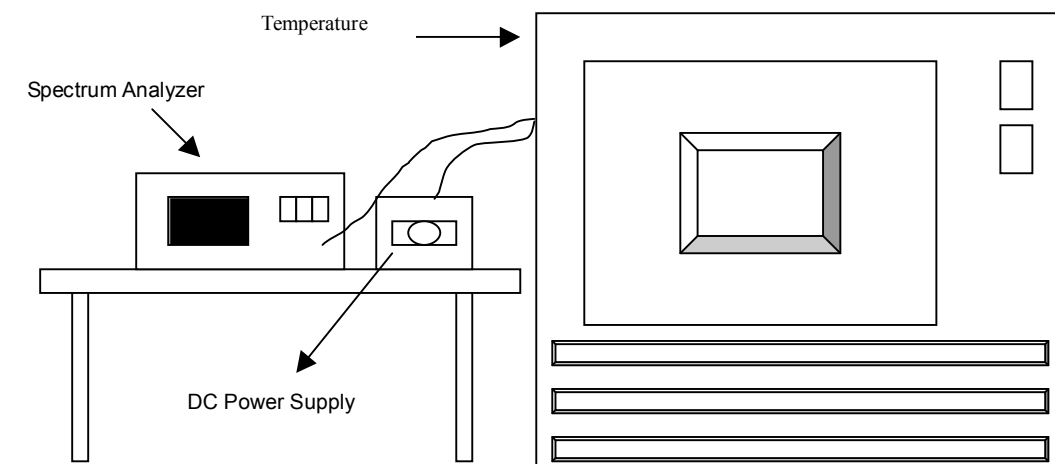

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.6.7 TEST RESULTS

Operating frequency: 5320MHz				Limit : $\pm 0.02\%$			
Temp. (°C)	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5320.0264	0.000496	5320.0233	0.000438	5320.0232	0.000436
	110	5320.0255	0.000479	5320.0236	0.000444	5320.0212	0.000398
	93.5	5320.0244	0.000459	5320.0240	0.000451	5320.0212	0.000398
40	126.5	5320.0326	0.000613	5320.0322	0.000605	5320.0316	0.000594
	110	5320.0314	0.000590	5320.0334	0.000628	5320.0356	0.000669
	93.5	5320.0317	0.000596	5320.0324	0.000609	5320.0338	0.000635
30	126.5	5320.0126	0.000237	5320.0122	0.000229	5320.0109	0.000205
	110	5320.0114	0.000214	5320.0112	0.000211	5320.0112	0.000211
	93.5	5320.0122	0.000229	5320.0118	0.000222	5320.0106	0.000199
20	126.5	5319.9877	0.000231	5319.9886	0.000214	5319.9889	0.000209
	110	5319.9869	0.000246	5319.9886	0.000214	5319.9912	0.000165
	93.5	5319.9906	0.000177	5319.9924	0.000143	5319.9877	0.000231
10	126.5	5320.0237	0.000445	5320.0218	0.000410	5320.0184	0.000346
	110	5320.0223	0.000419	5320.0241	0.000453	5320.0234	0.000440
	93.5	5320.0231	0.000434	5320.0222	0.000417	5320.0188	0.000353
0	126.5	5320.0308	0.000579	5320.0299	0.000562	5320.0277	0.000521
	110	5320.0308	0.000579	5320.0301	0.000566	5320.0292	0.000549
	93.5	5320.0284	0.000534	5320.0280	0.000526	5320.0268	0.000504
-10	126.5	5319.9932	0.000128	5319.9977	0.000043	5319.9914	0.000162
	110	5319.9944	0.000105	5319.9936	0.000120	5319.9928	0.000135
	93.5	5319.9926	0.000139	5319.9945	0.000103	5319.9946	0.000102
-20	126.5	5320.0118	0.000222	5320.0111	0.000209	5320.0105	0.000197
	110	5320.0116	0.000218	5320.0122	0.000229	5320.0103	0.000194
	93.5	5320.0124	0.000233	5320.0131	0.000246	5320.0138	0.000259
-30	126.5	5320.0095	0.000179	5320.0102	0.000192	5320.0117	0.000220
	110	5320.0072	0.000135	5320.0092	0.000173	5320.0098	0.000184
	93.5	5320.0076	0.000143	5320.0088	0.000165	5320.0101	0.000190

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS (ANTENNA 1)

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation**NOTE (Peak):**



The band edge emission plot on the following first page shows 58.51dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 107.9dBuV/m (Peak), so the maximum field strength in restrict band is $107.9 - 58.51 = 49.39$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the following first page shows 46.26dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 104.8dBuV/m (Peak), so the maximum field strength in restrict band is $104.8 - 46.26 = 58.54$ dBuV/m which is under 74dBuV/m limit.

NOTE (Average):

The band edge emission plot on the following second page shows 59.52dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 99.6dBuV/m (Average), so the maximum field strength in restrict band is $99.6 - 59.52 = 40.08$ dBuV/m which is under 54dBuV/m limit.


The band edge emission plot on the following second page shows 51.46dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 96.4dBuV/m (Average), so the maximum field strength in restrict band is $96.4 - 51.46 = 44.94$ dBuV/m which is under 54dBuV/m limit.

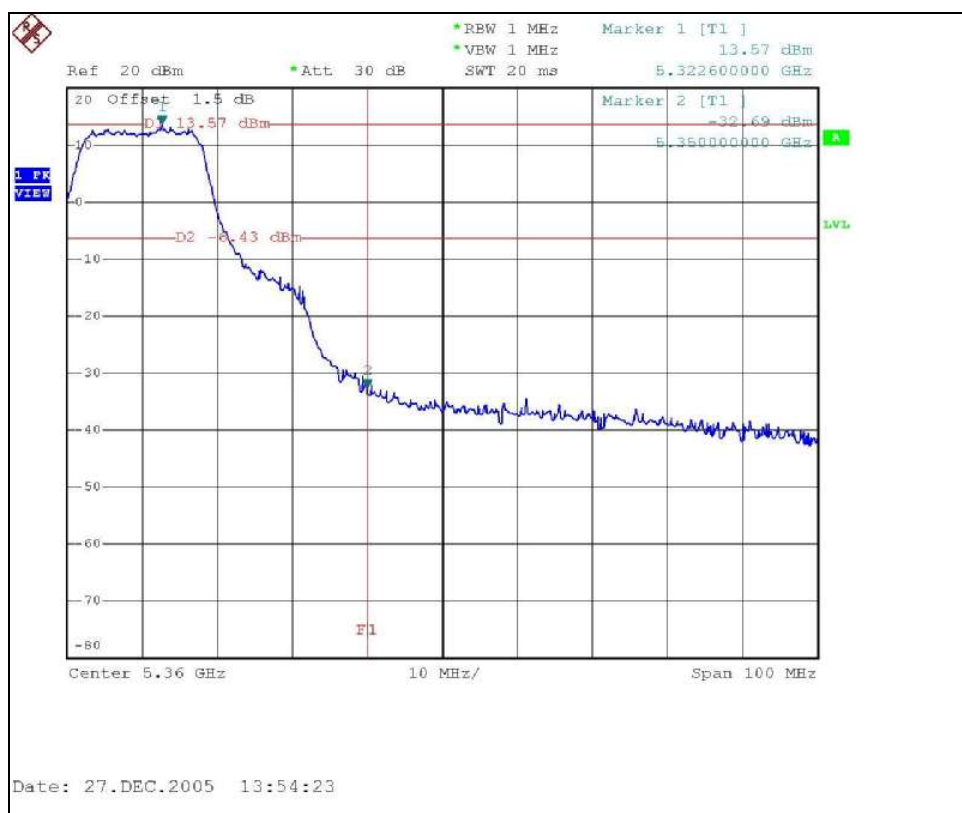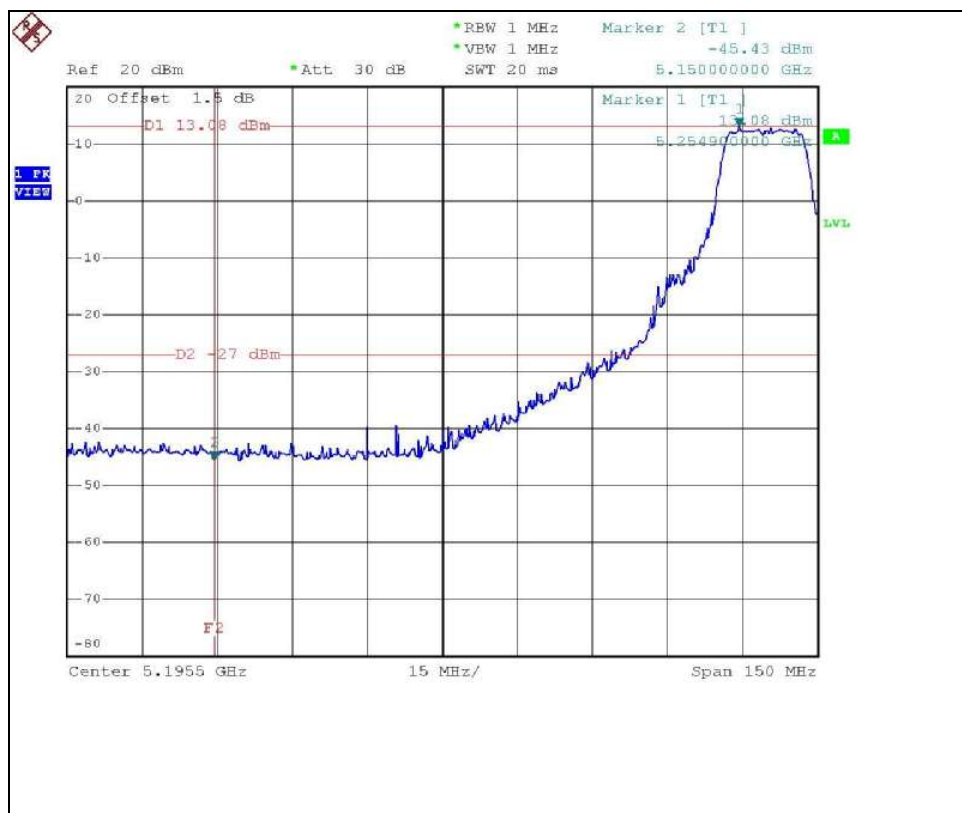802.11a OFDM modulation

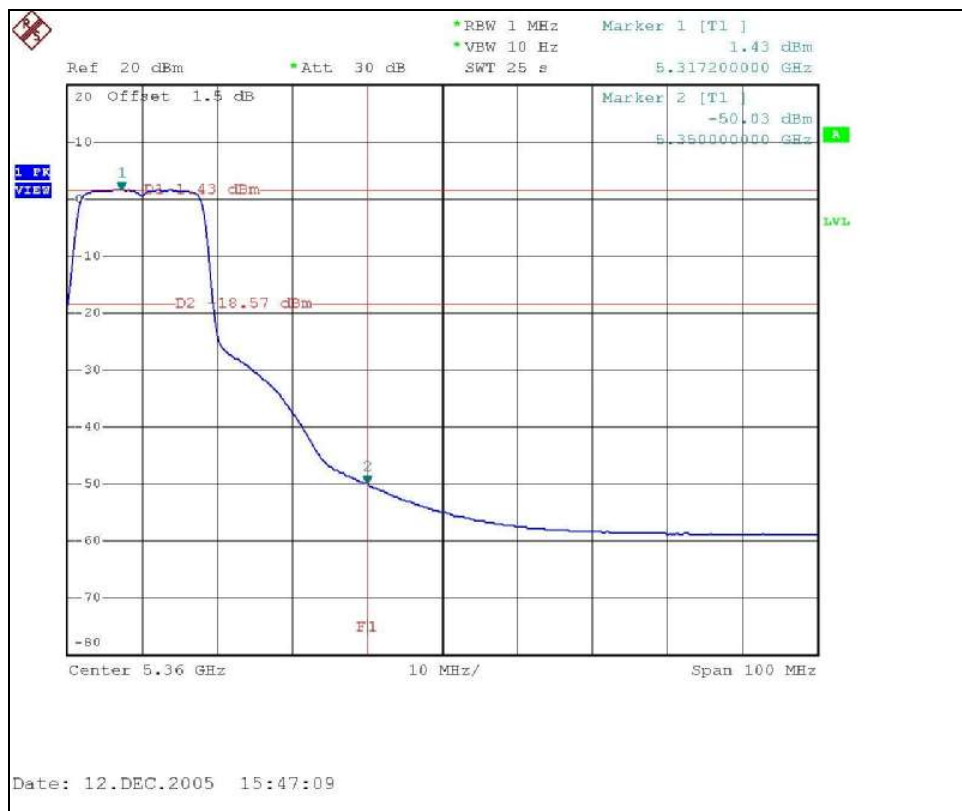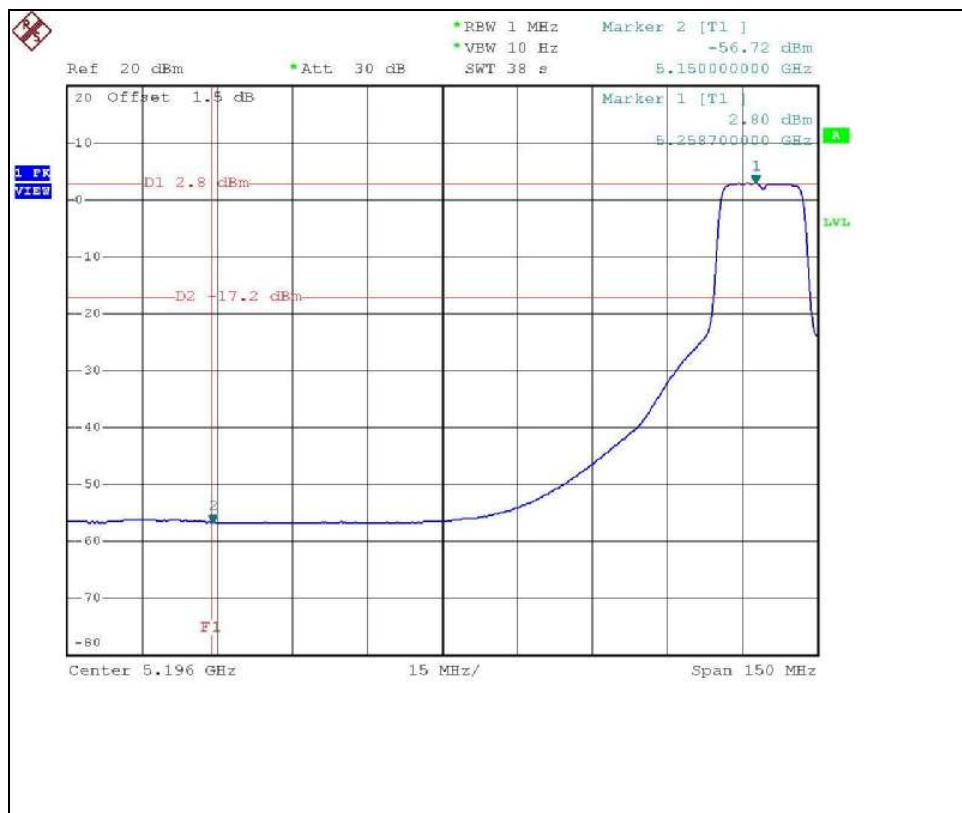


Date: 12.DEC.2005 15:47:09

CH 1

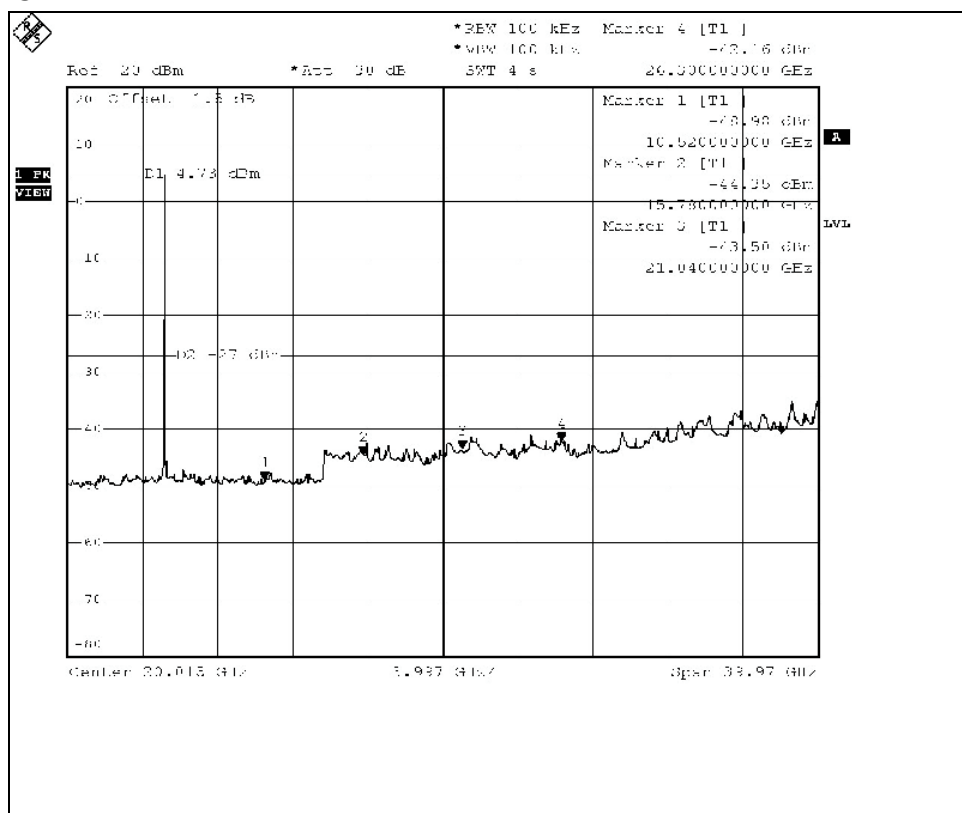

CH 8

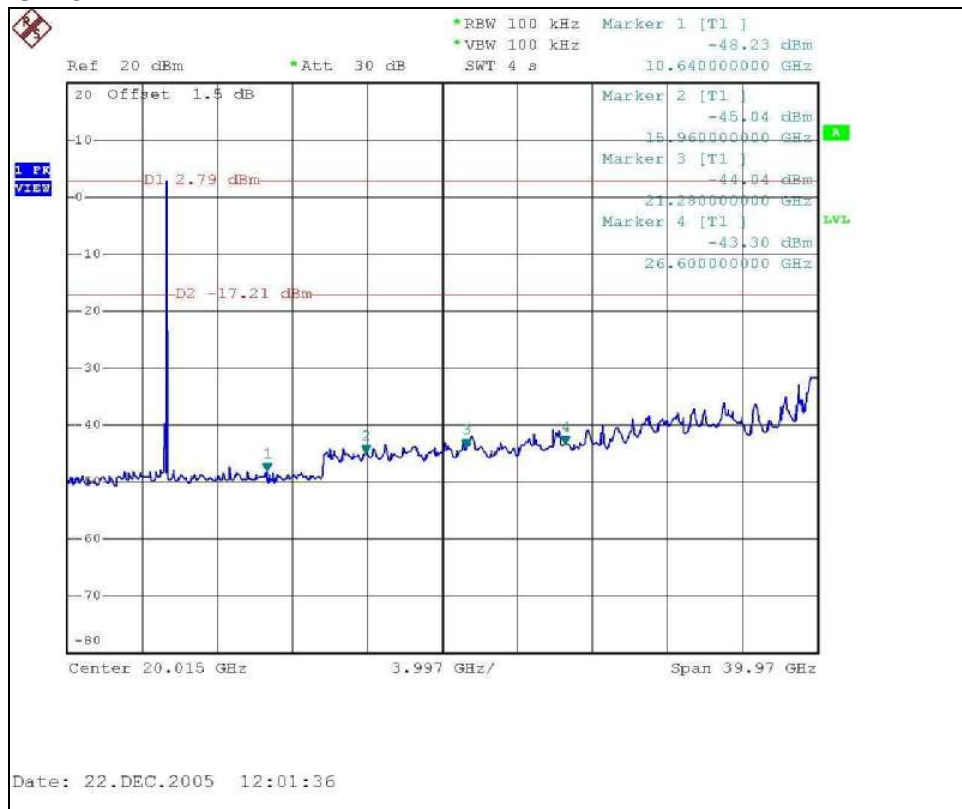

4.7.5 TEST RESULTS (ANTENNA 2)

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation**NOTE (Peak):**



The band edge emission plot on the following first page shows 58.51dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 114.7dBuV/m (Peak), so the maximum field strength in restrict band is $114.7 - 58.51 = 56.19$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the following first page shows 46.26dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 113.0dBuV/m (Peak), so the maximum field strength in restrict band is $113.0 - 46.26 = 66.74$ dBuV/m which is under 74dBuV/m limit.

NOTE (Average):

The band edge emission plot on the following second page shows 59.52dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 106.2dBuV/m (Average), so the maximum field strength in restrict band is $106.2 - 59.52 = 46.68$ dBuV/m which is under 54dBuV/m limit.


The band edge emission plot on the following second page shows 51.46dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 104.8dBuV/m (Average), so the maximum field strength in restrict band is $104.8 - 51.46 = 53.34$ dBuV/m which is under 54dBuV/m limit.

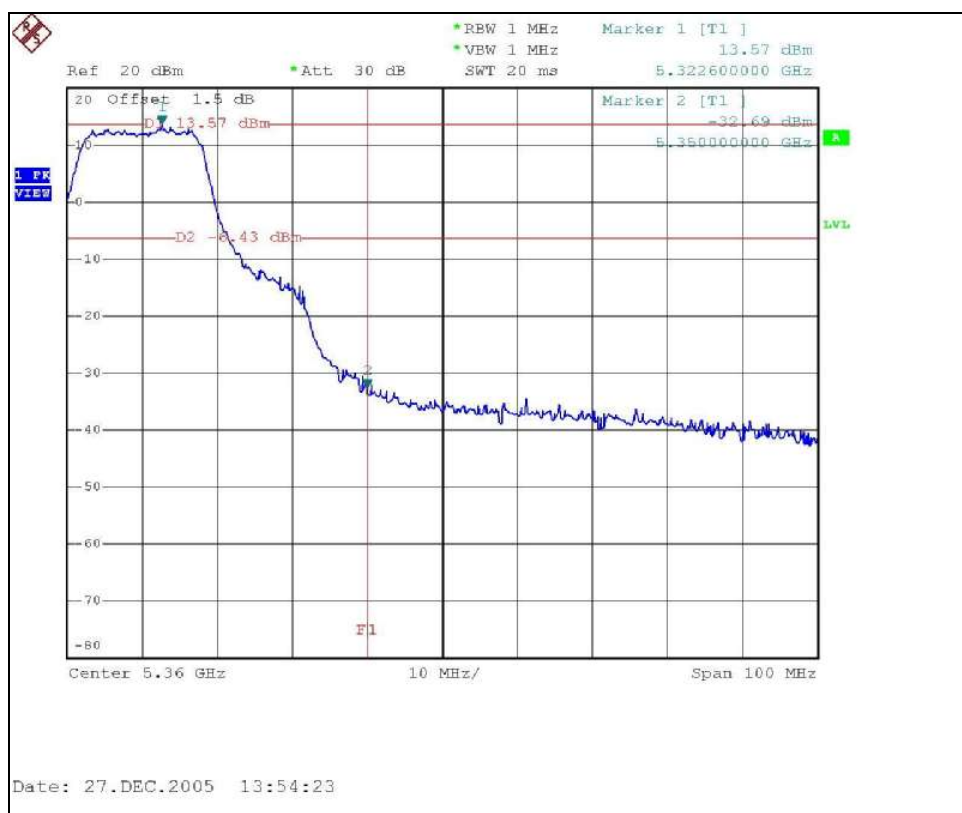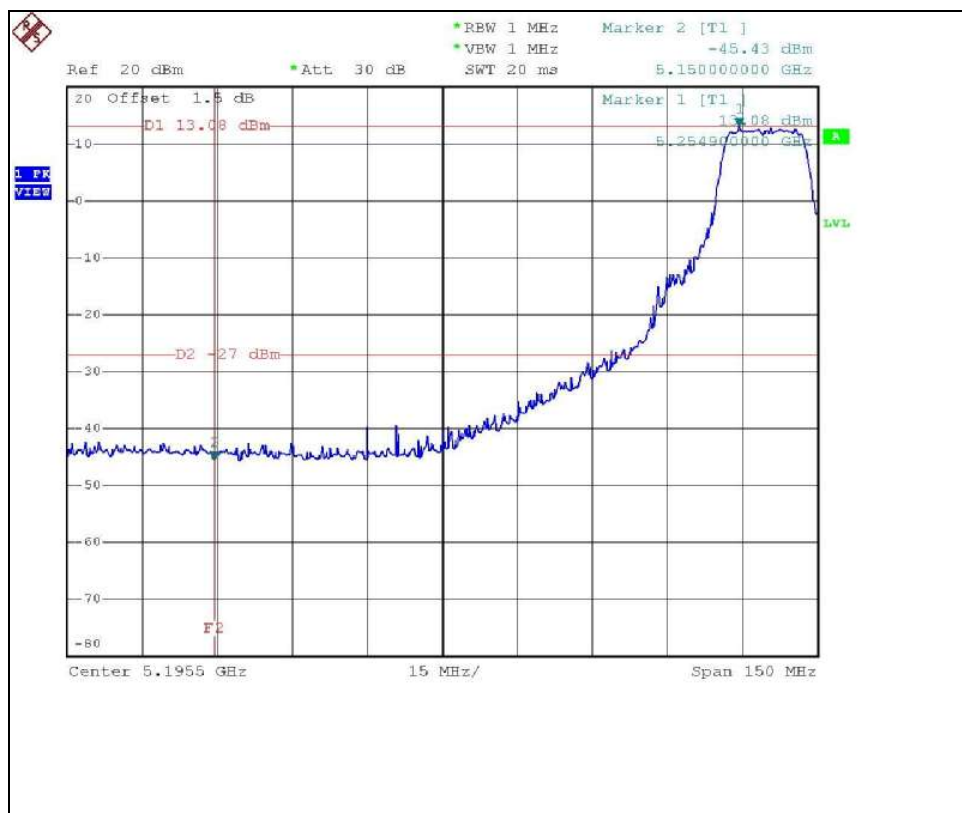802.11a OFDM modulation

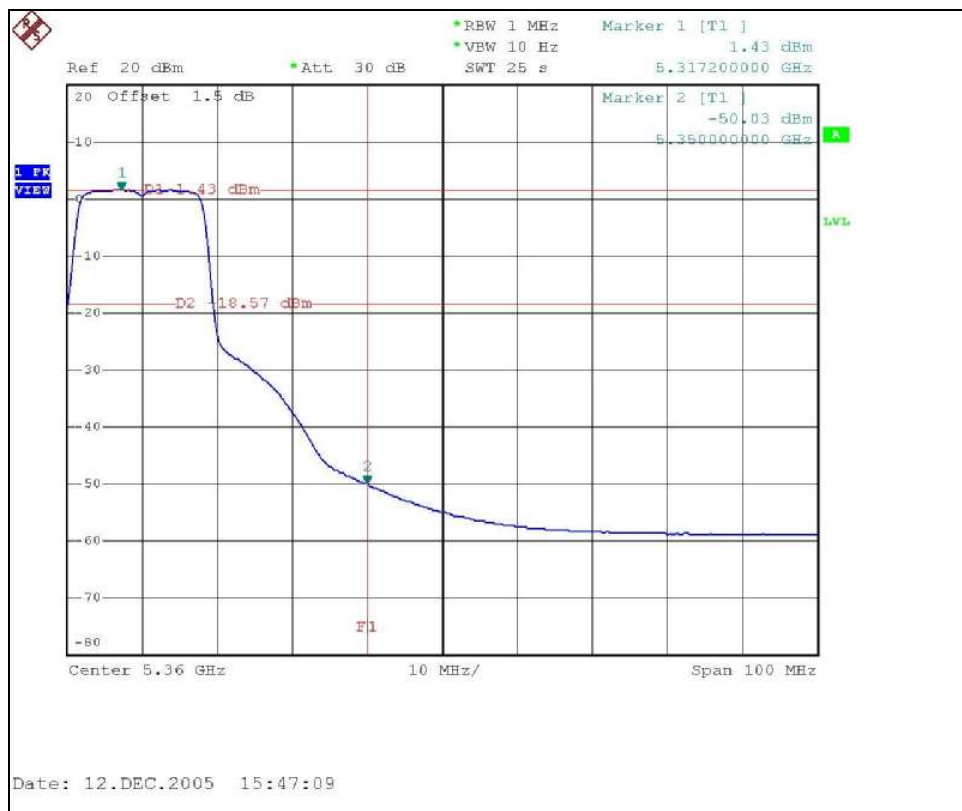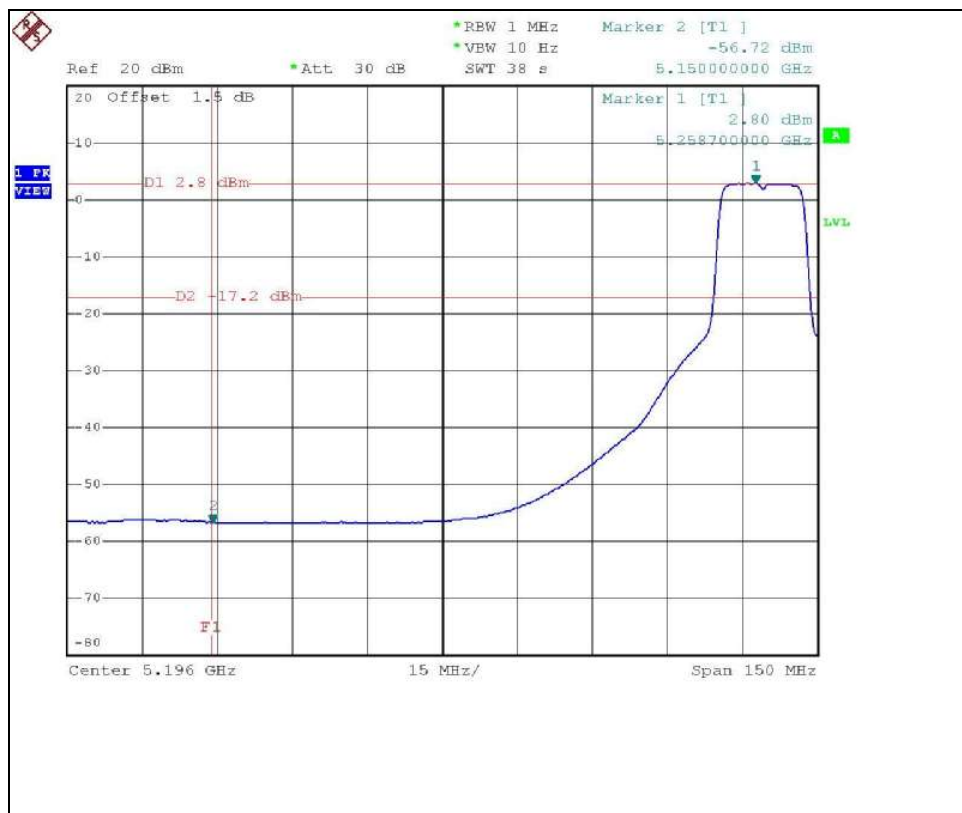


Date: 12.DEC.2005 15:47:09

CH 1

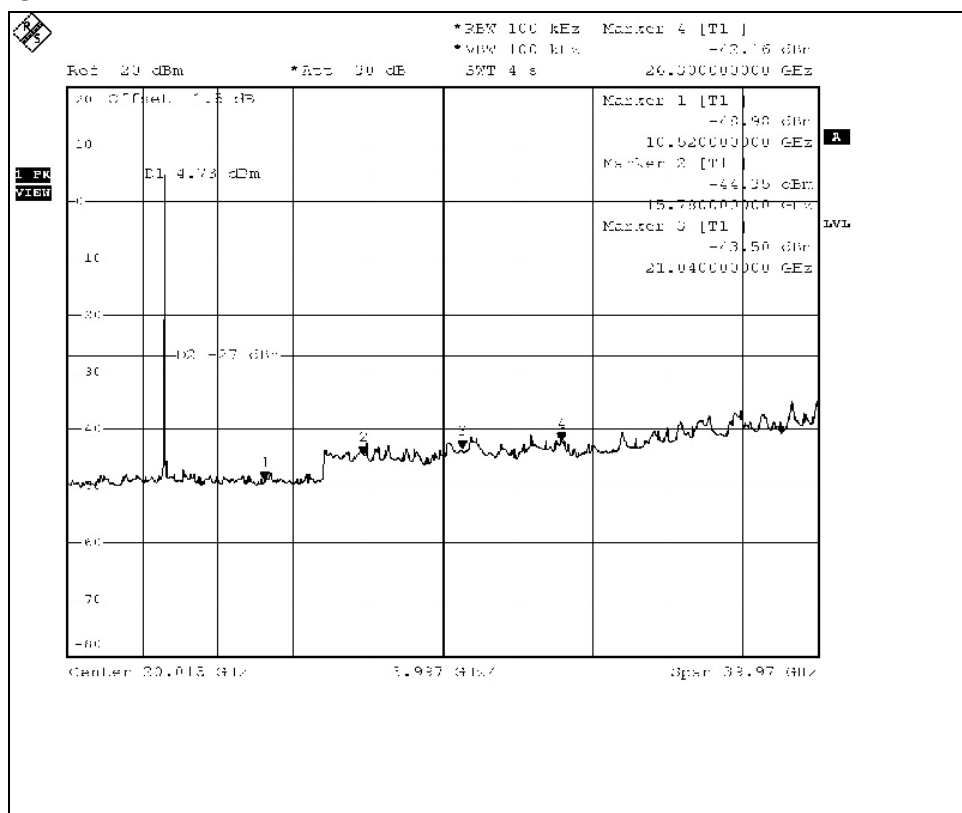

CH 8

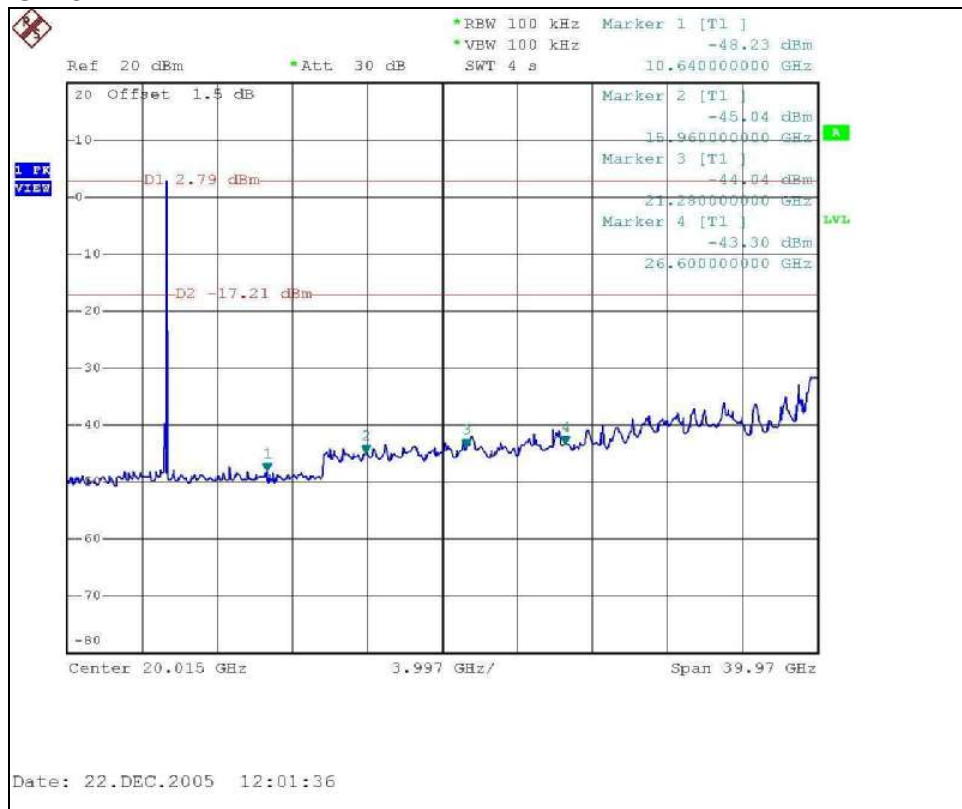

4.7.6 TEST RESULTS (ANTENNA 3)

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

802.11a OFDM modulation**NOTE (Peak):**



The band edge emission plot on the following first page shows 58.51dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 110.8dBuV/m (Peak), so the maximum field strength in restrict band is $110.8 - 58.51 = 52.29$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the following first page shows 46.26dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 109.6dBuV/m (Peak), so the maximum field strength in restrict band is $109.6 - 46.26 = 63.34$ dBuV/m which is under 74dBuV/m limit.

NOTE (Average):

The band edge emission plot on the following second page shows 59.52dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 102.3dBuV/m (Average), so the maximum field strength in restrict band is $102.3 - 59.52 = 42.78$ dBuV/m which is under 54dBuV/m limit.


The band edge emission plot on the following second page shows 51.46dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 101.4dBuV/m (Average), so the maximum field strength in restrict band is $101.4 - 51.46 = 49.94$ dBuV/m which is under 54dBuV/m limit.

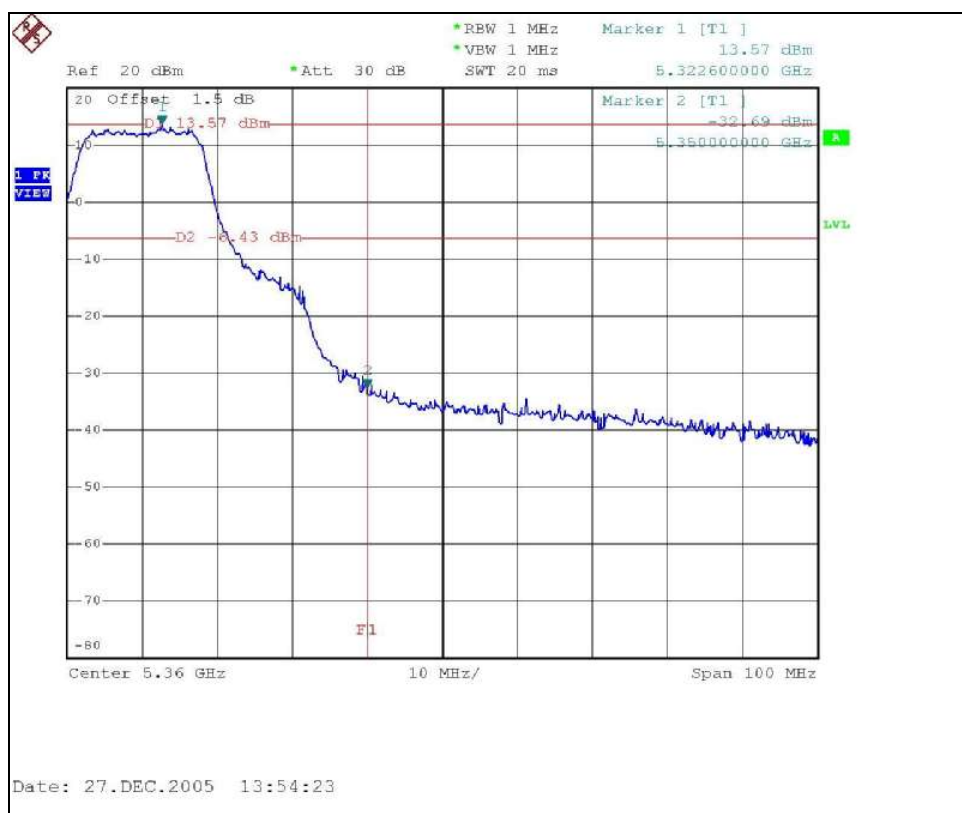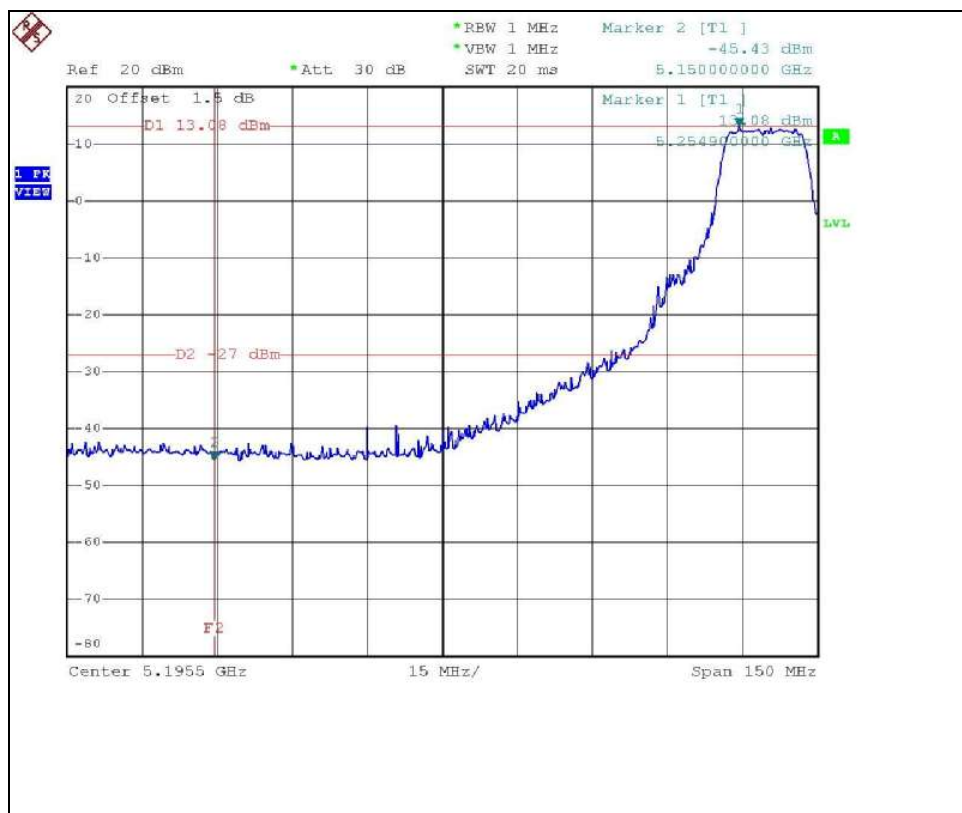802.11a OFDM modulation

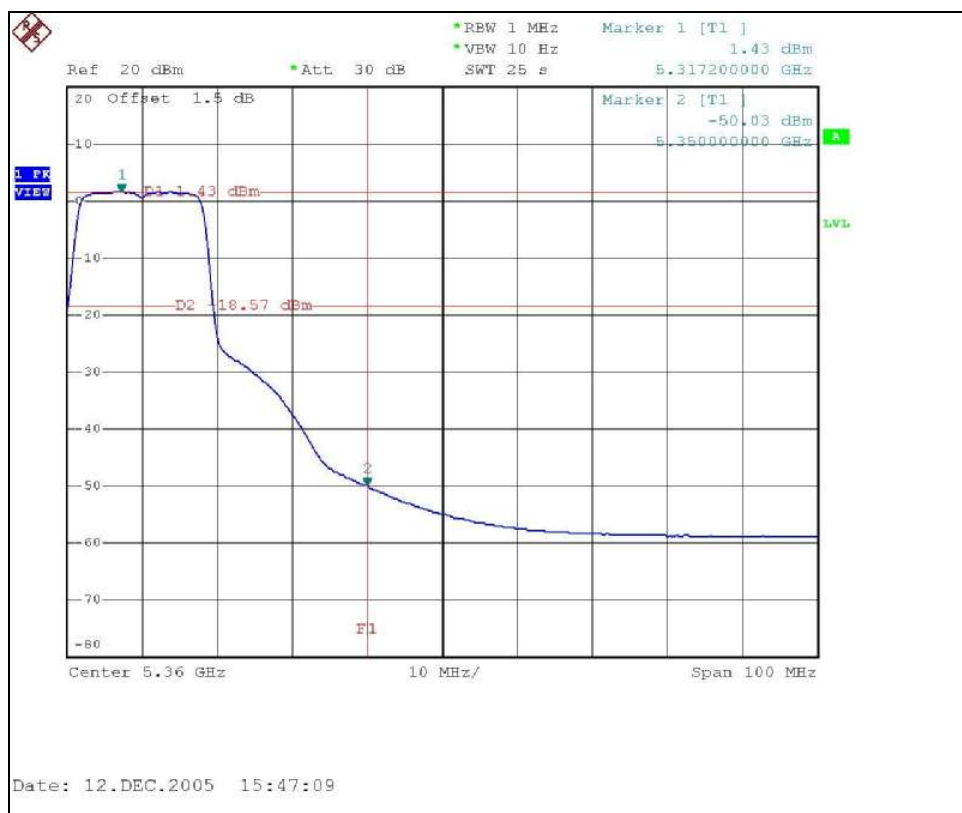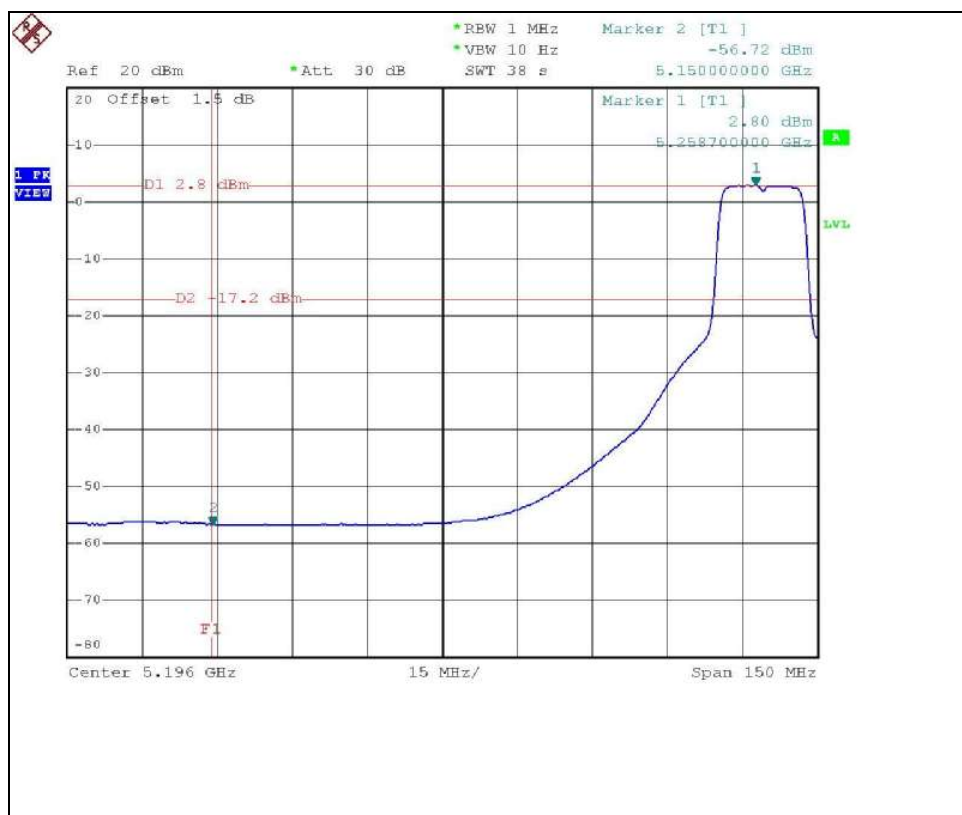


Date: 12.DEC.2005 15:47:09

CH 1

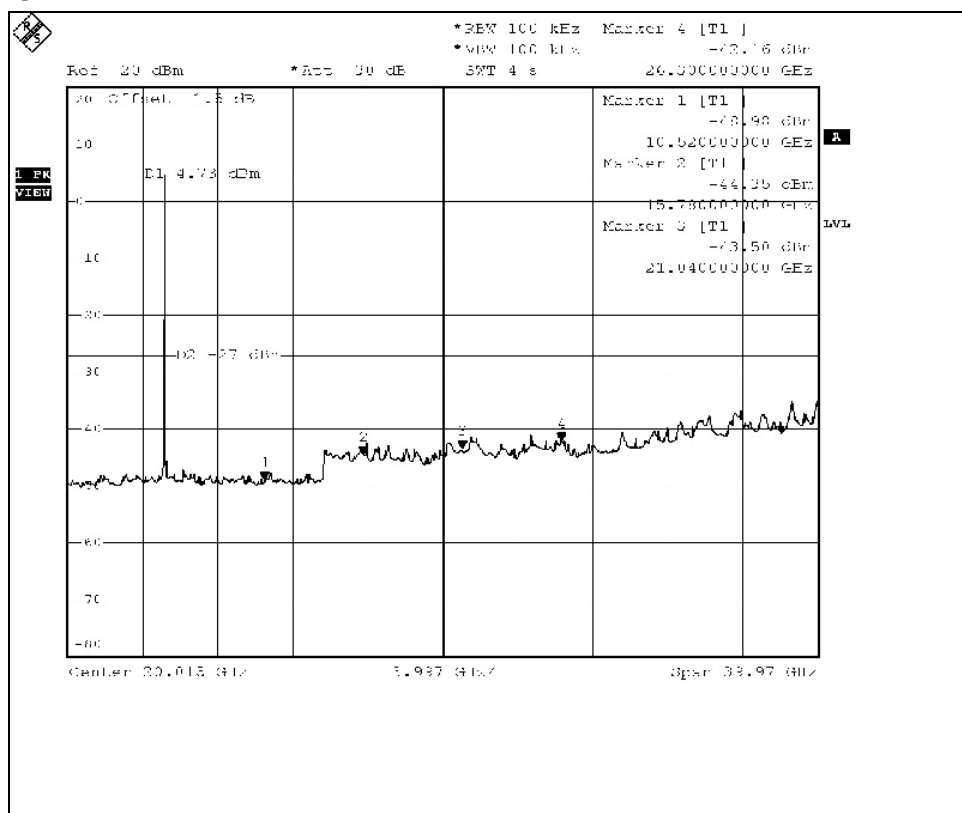

CH 8

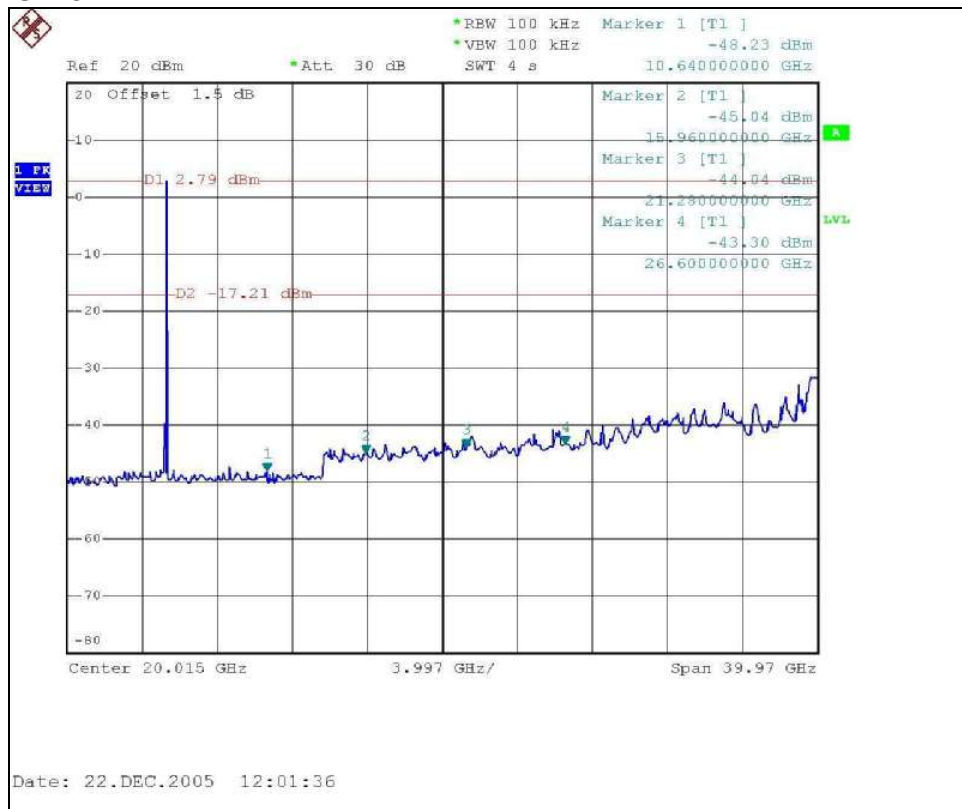

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are as following:

No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1	S24493DS	3 dBi	Dual Band, Tri-mode 802.11b/a/g Spatial Diversity Omnidirectional Antenna	Reverse SMA
2	S24497P	8 dBi	Dual Band, Tri-mode Directional Antenna	Reverse SMA
3	FDS_2FED01+I3G	5 dBi	Dual Band Antenna, Dipole	MMCX

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (WITH ADAPTER)



CONDUCTED EMISSION TEST (WITH POE)



RADIATED EMISSION TEST (ANTENNA: S24493DS + ADAPTER)



RADIATED EMISSION TEST (ANTENNA: S24493DS + POE)



RADIATED EMISSION TEST (ANTENNA: S24497P + ADAPTER)



RADIATED EMISSION TEST (ANTENNA: S24497P + POE)



RADIATED EMISSION TEST (ANTENNA: FDS_2FED01+I3G + ADAPTER)



RADIATED EMISSION TEST (ANTENNA: FDS_2FED01+I3G + POE)



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.