



Test Report

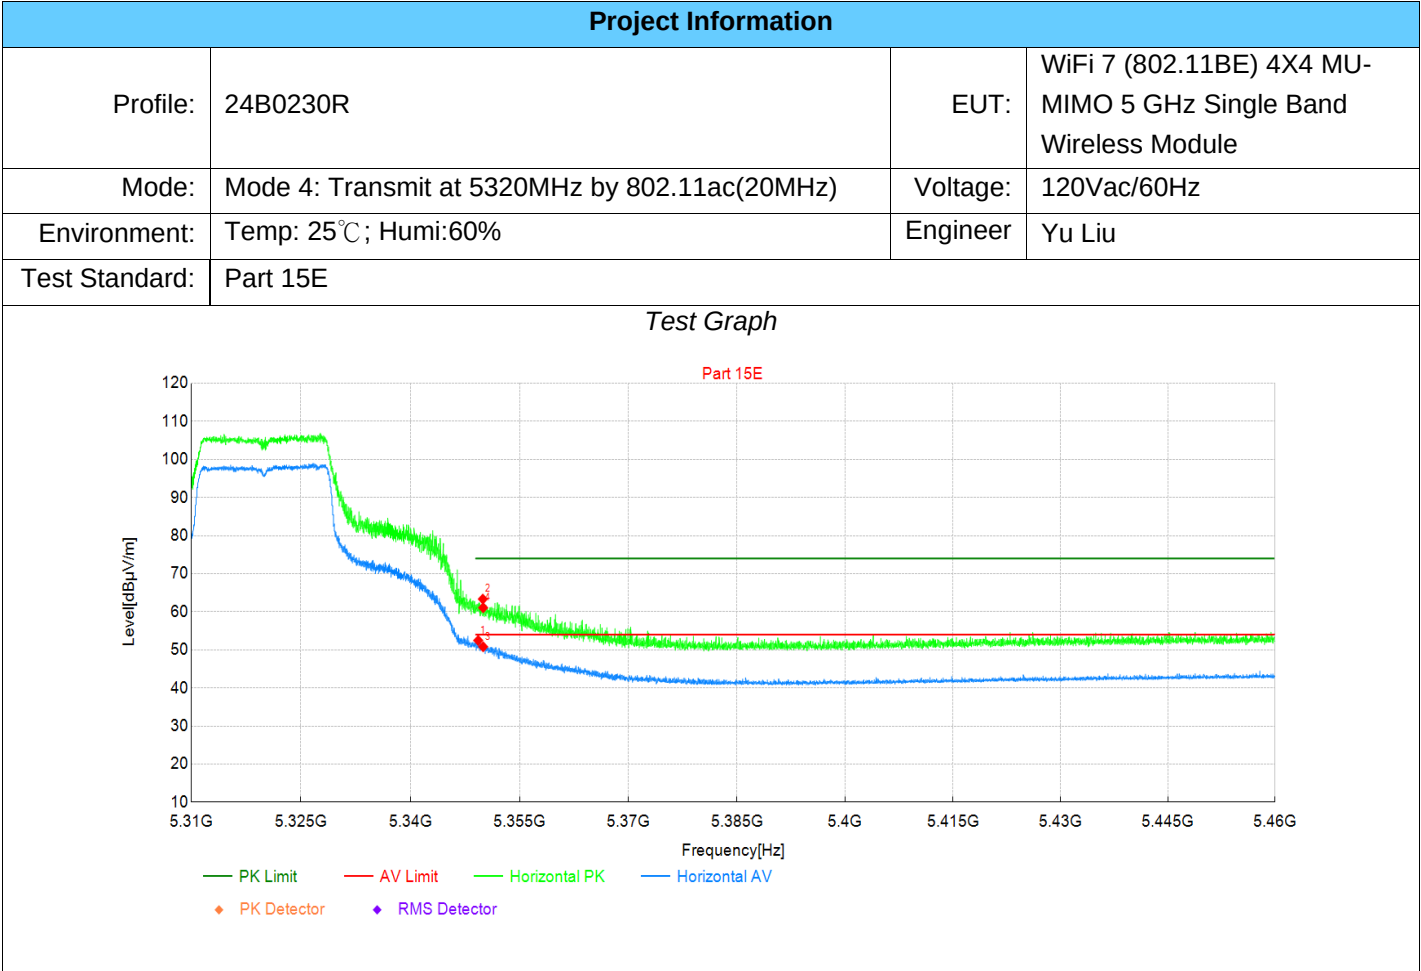

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5349            | 36.77          | 52.48          | 15.71         | 54.00          | 1.52        | AV  | Horizo | PASS    |
| 2                   | 5350            | 47.63          | 63.34          | 15.71         | 74.00          | 10.66       | PK  | Horizo | PASS    |
| 3                   | 5350            | 35.10          | 50.81          | 15.71         | 54.00          | 3.19        | AV  | Horizo | PASS    |
| 4                   | 5350            | 45.36          | 61.07          | 15.71         | 74.00          | 12.93       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

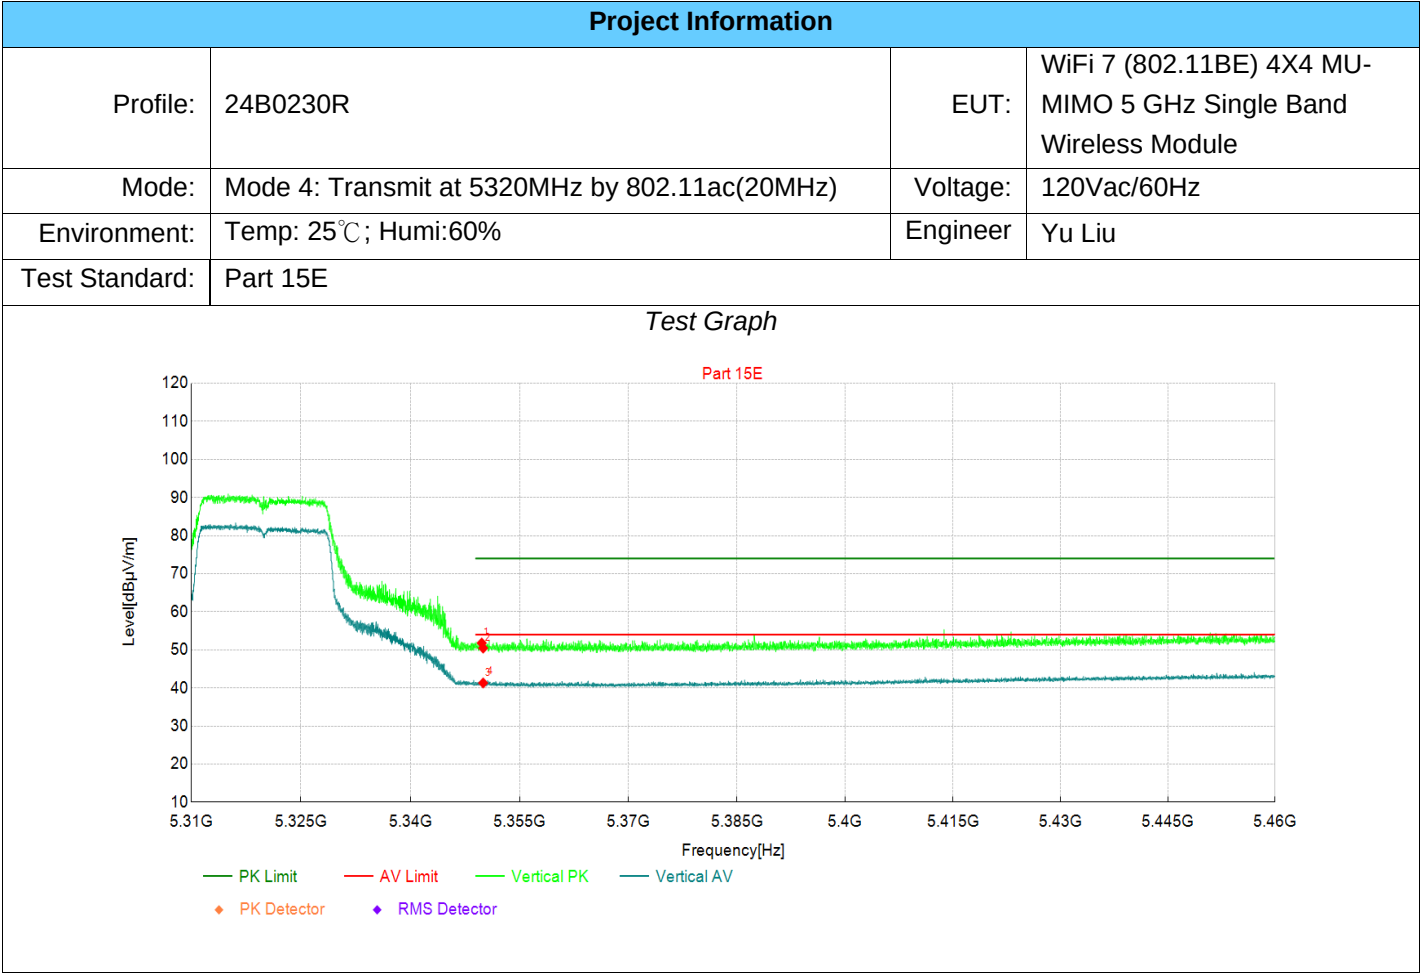

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 36.09          | 51.80          | 15.71         | 74.00          | 22.20       | PK  | Vertic | PASS    |
| 2                   | 5350            | 34.75          | 50.46          | 15.71         | 74.00          | 23.54       | PK  | Vertic | PASS    |
| 3                   | 5350            | 25.59          | 41.30          | 15.71         | 54.00          | 12.70       | AV  | Vertic | PASS    |
| 4                   | 5350            | 26.05          | 41.76          | 15.71         | 54.00          | 12.24       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

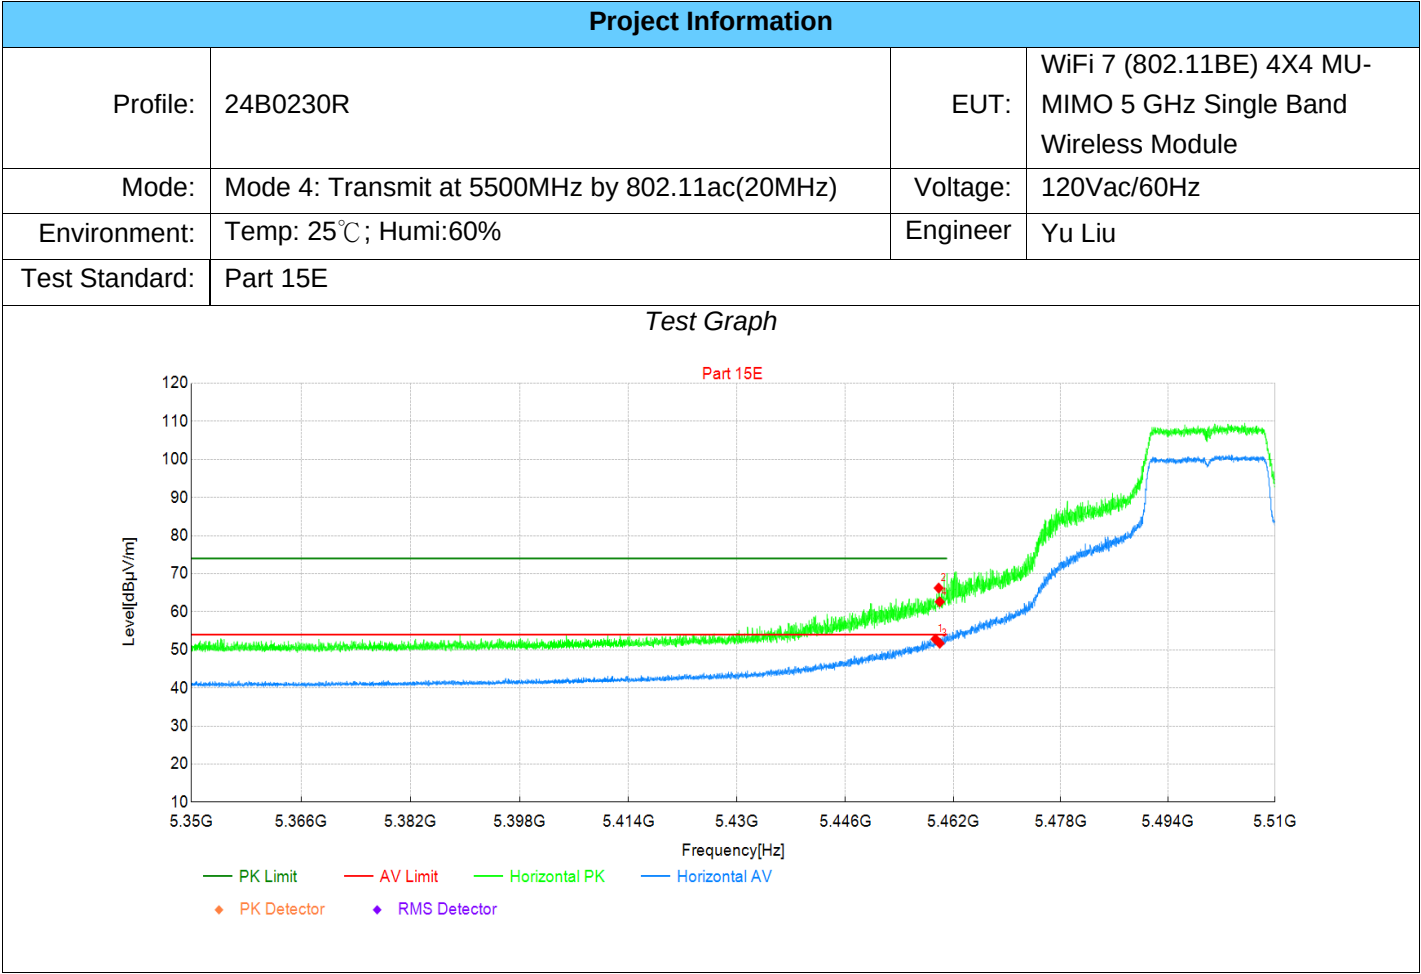

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 36.50          | 52.84          | 16.34         | 54.00          | 1.16        | AV  | Horizo | PASS    |
| 2                   | 5460            | 49.90          | 66.24          | 16.34         | 74.00          | 7.76        | PK  | Horizo | PASS    |
| 3                   | 5460            | 35.38          | 51.72          | 16.34         | 54.00          | 2.28        | AV  | Horizo | PASS    |
| 4                   | 5460            | 46.28          | 62.62          | 16.34         | 74.00          | 11.38       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

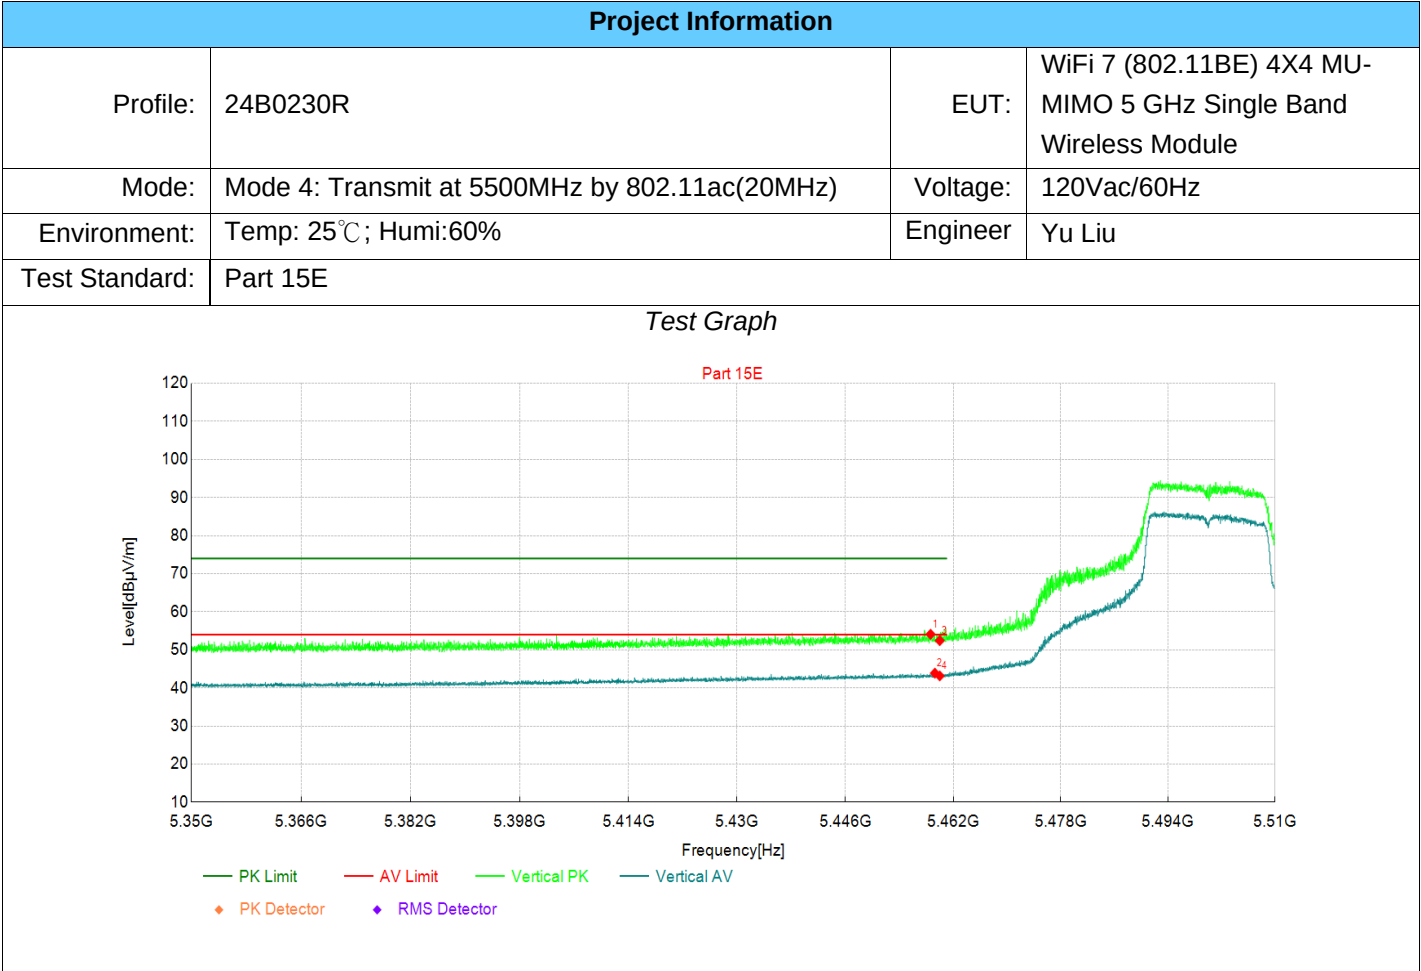

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 37.78          | 54.10          | 16.32         | 74.00          | 19.90       | PK  | Vertic | PASS    |
| 2                   | 5459            | 27.54          | 43.88          | 16.34         | 54.00          | 10.12       | AV  | Vertic | PASS    |
| 3                   | 5460            | 36.08          | 52.42          | 16.34         | 74.00          | 21.58       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.82          | 43.16          | 16.34         | 54.00          | 10.84       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

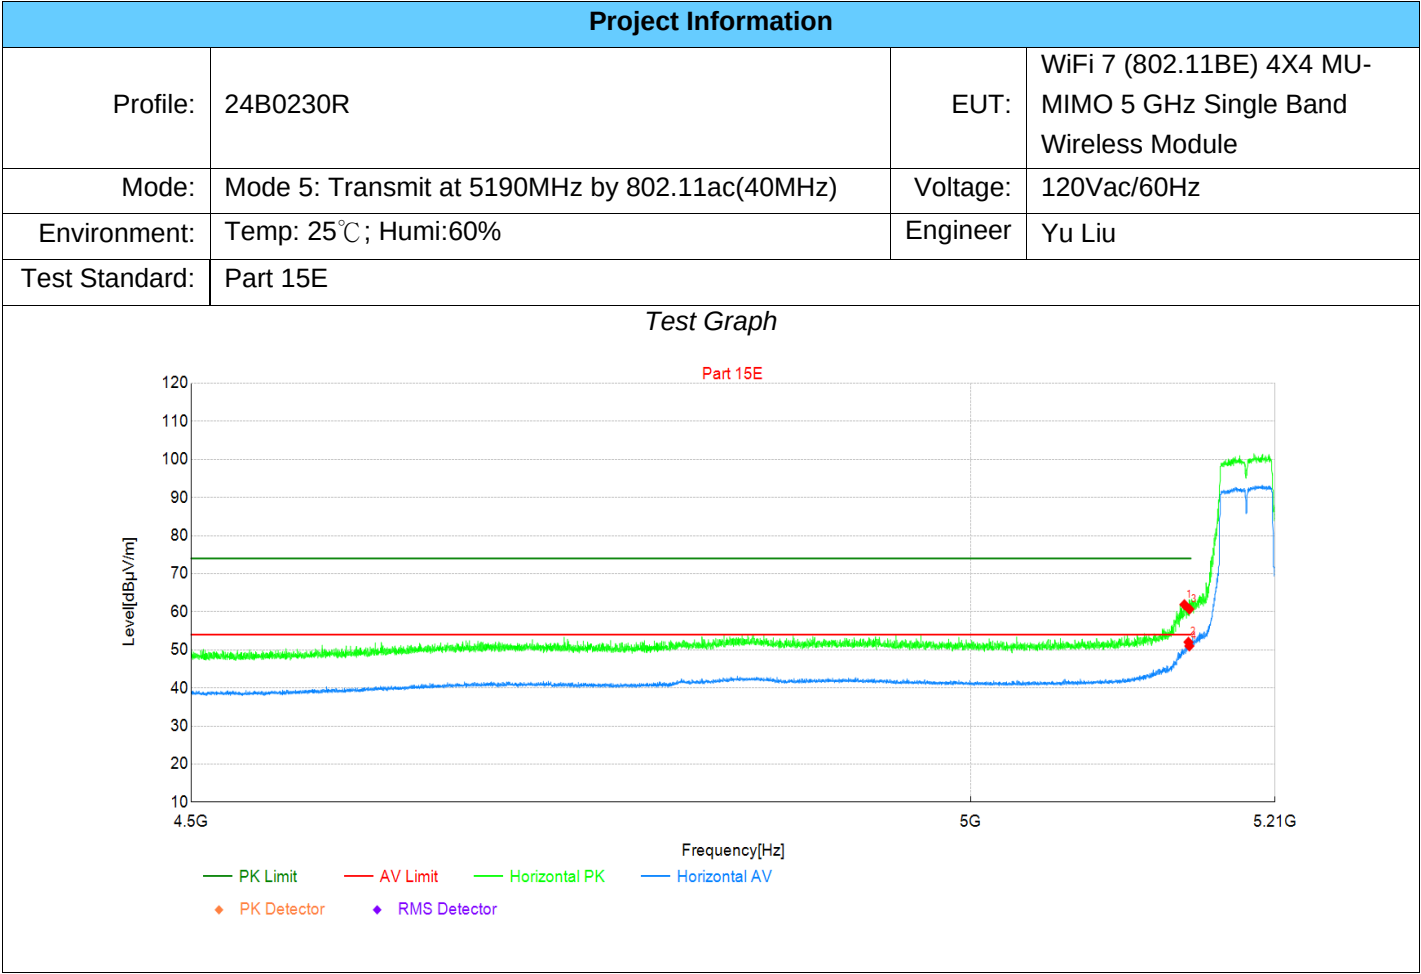

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5147            | 46.81          | 61.90          | 15.09         | 74.00          | 12.10       | PK  | Horizo | PASS    |
| 2                   | 5149            | 36.92          | 52.03          | 15.11         | 54.00          | 1.97        | AV  | Horizo | PASS    |
| 3                   | 5150            | 45.58          | 60.69          | 15.11         | 74.00          | 13.31       | PK  | Horizo | PASS    |
| 4                   | 5150            | 35.90          | 51.01          | 15.11         | 54.00          | 2.99        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

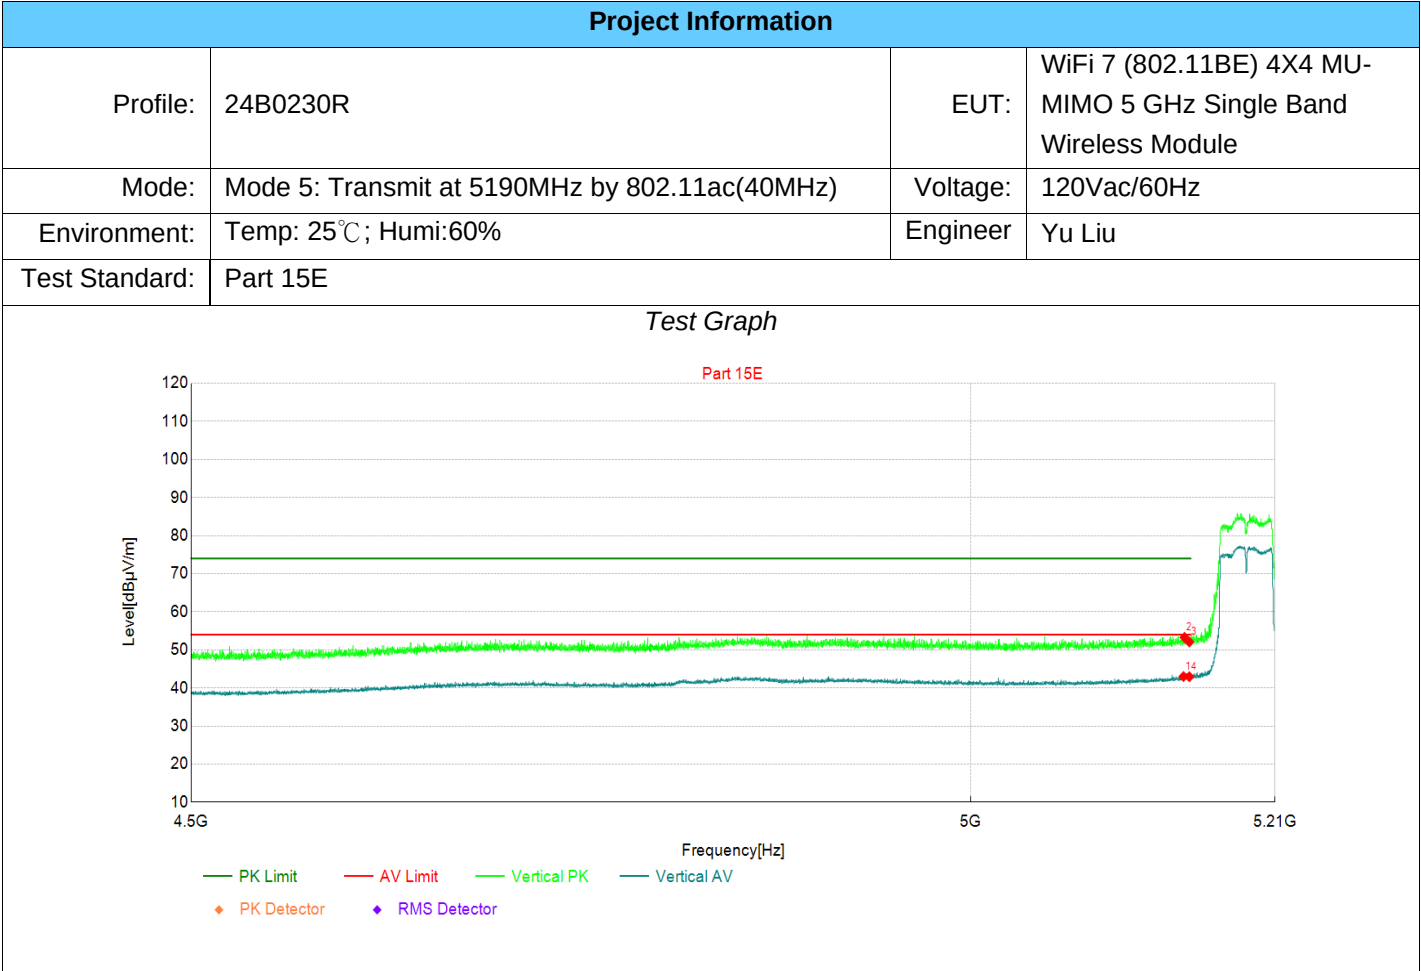

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5146            | 27.91          | 43.00          | 15.09         | 54.00          | 11.00       | AV  | Vertic | PASS    |
| 2                   | 5147            | 38.18          | 53.27          | 15.09         | 74.00          | 20.73       | PK  | Vertic | PASS    |
| 3                   | 5150            | 36.96          | 52.07          | 15.11         | 74.00          | 21.93       | PK  | Vertic | PASS    |
| 4                   | 5150            | 27.84          | 42.95          | 15.11         | 54.00          | 11.05       | AV  | Vertic | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

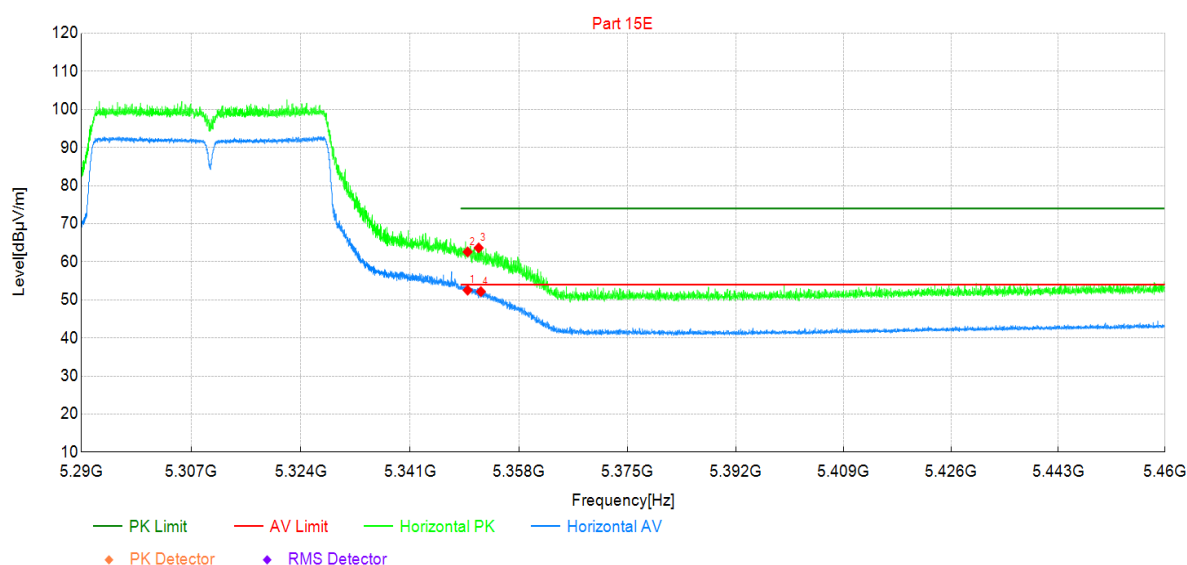


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5350            | 36.83          | 52.54          | 15.71         | 54.00          | 1.46        | AV  | Horizo | PASS    |
| 2  | 5350            | 46.89          | 62.60          | 15.71         | 74.00          | 11.40       | PK  | Horizo | PASS    |
| 3  | 5352            | 47.94          | 63.65          | 15.71         | 74.00          | 10.35       | PK  | Horizo | PASS    |
| 4  | 5352            | 36.45          | 52.16          | 15.71         | 54.00          | 1.84        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

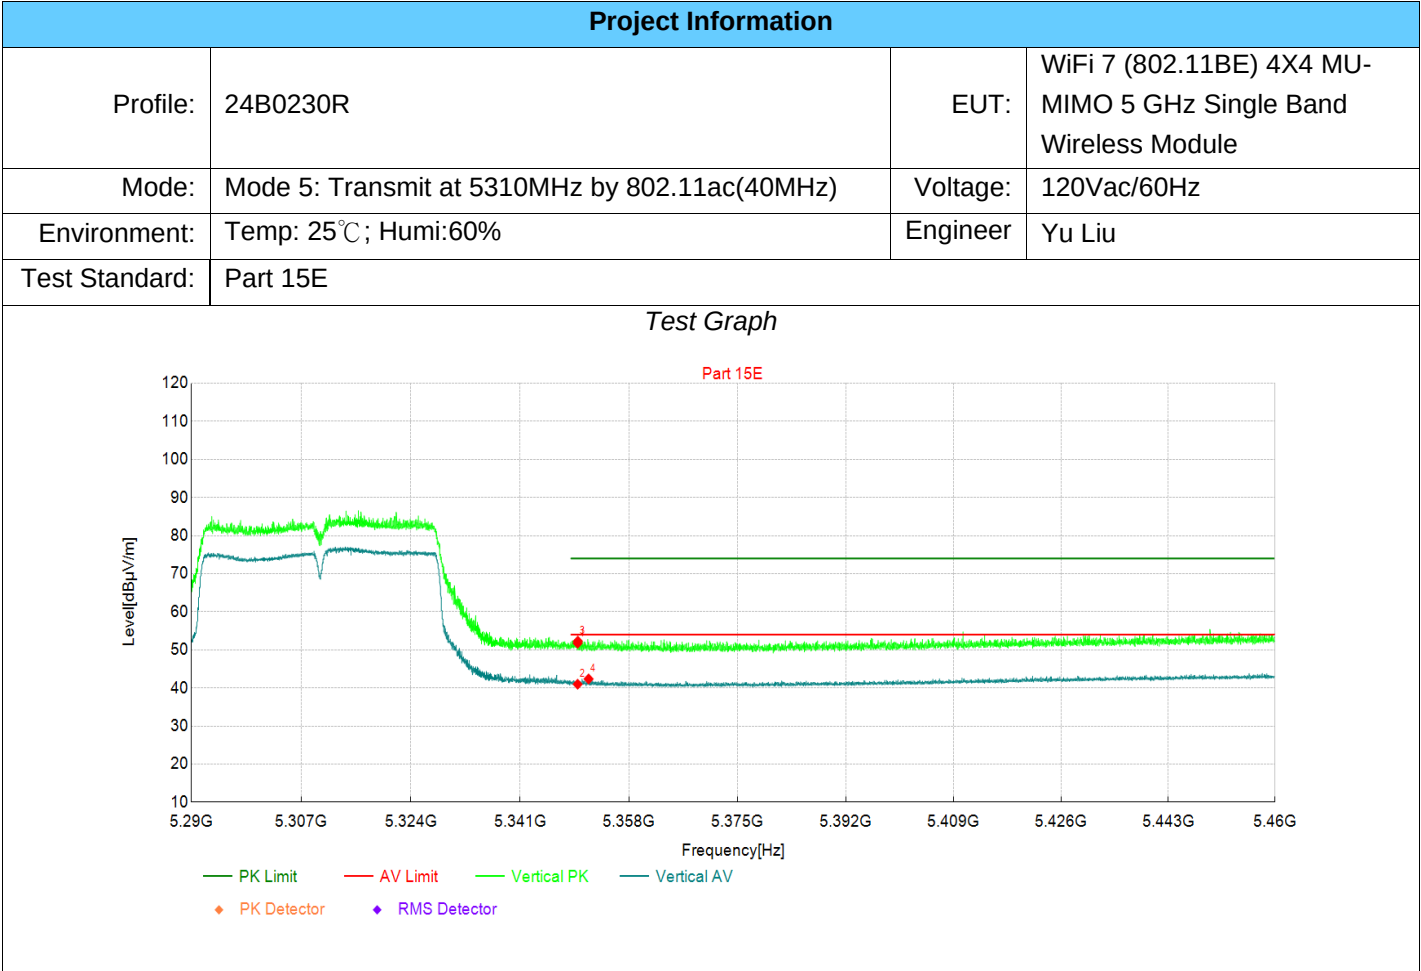

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 36.04          | 51.75          | 15.71         | 74.00          | 22.25       | PK  | Vertic | PASS    |
| 2                   | 5350            | 25.26          | 40.97          | 15.71         | 54.00          | 13.03       | AV  | Vertic | PASS    |
| 3                   | 5350            | 36.58          | 52.29          | 15.71         | 74.00          | 21.71       | PK  | Vertic | PASS    |
| 4                   | 5352            | 26.64          | 42.35          | 15.71         | 54.00          | 11.65       | AV  | Vertic | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

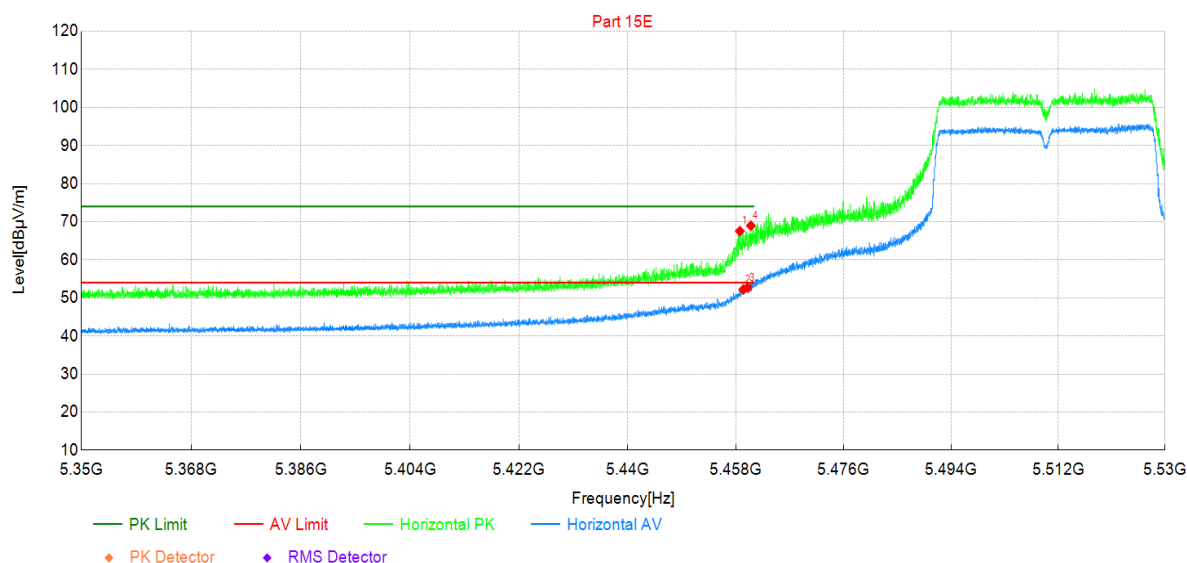


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5459            | 51.21          | 67.53          | 16.32         | 74.00          | 6.47        | PK  | Horizo | PASS    |
| 2  | 5459            | 35.86          | 52.20          | 16.34         | 54.00          | 1.80        | AV  | Horizo | PASS    |
| 3  | 5460            | 36.34          | 52.68          | 16.34         | 54.00          | 1.32        | AV  | Horizo | PASS    |
| 4  | 5461            | 52.60          | 68.95          | 16.35         | 74.00          | 5.05        | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

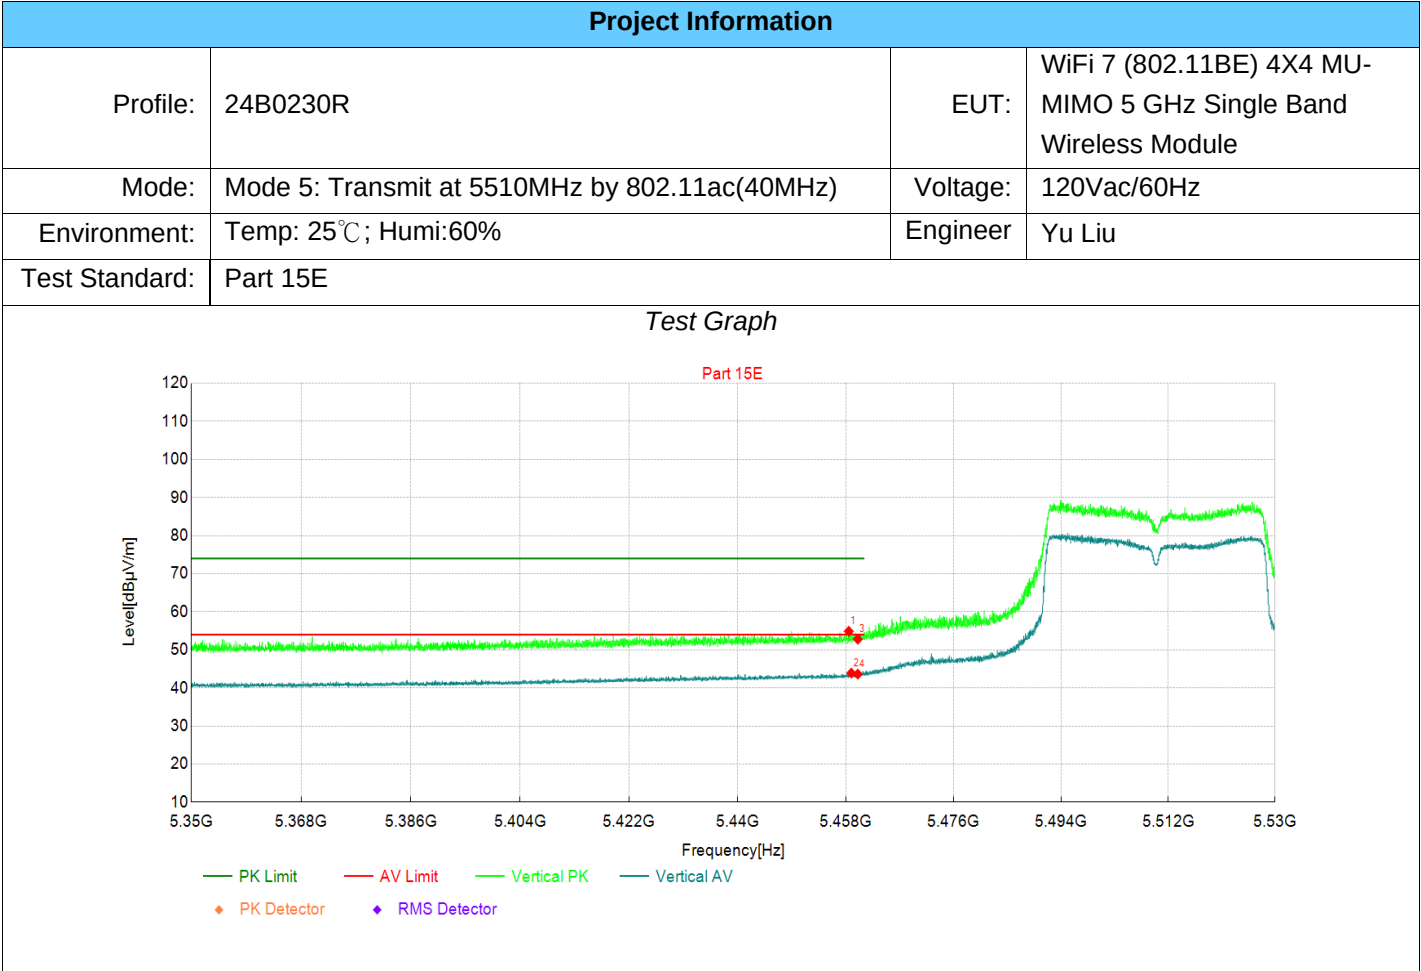

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 38.56          | 54.88          | 16.32         | 74.00          | 19.12       | PK  | Vertic | PASS    |
| 2                   | 5459            | 27.57          | 43.90          | 16.33         | 54.00          | 10.10       | AV  | Vertic | PASS    |
| 3                   | 5460            | 36.45          | 52.79          | 16.34         | 74.00          | 21.21       | PK  | Vertic | PASS    |
| 4                   | 5460            | 27.29          | 43.63          | 16.34         | 54.00          | 10.37       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

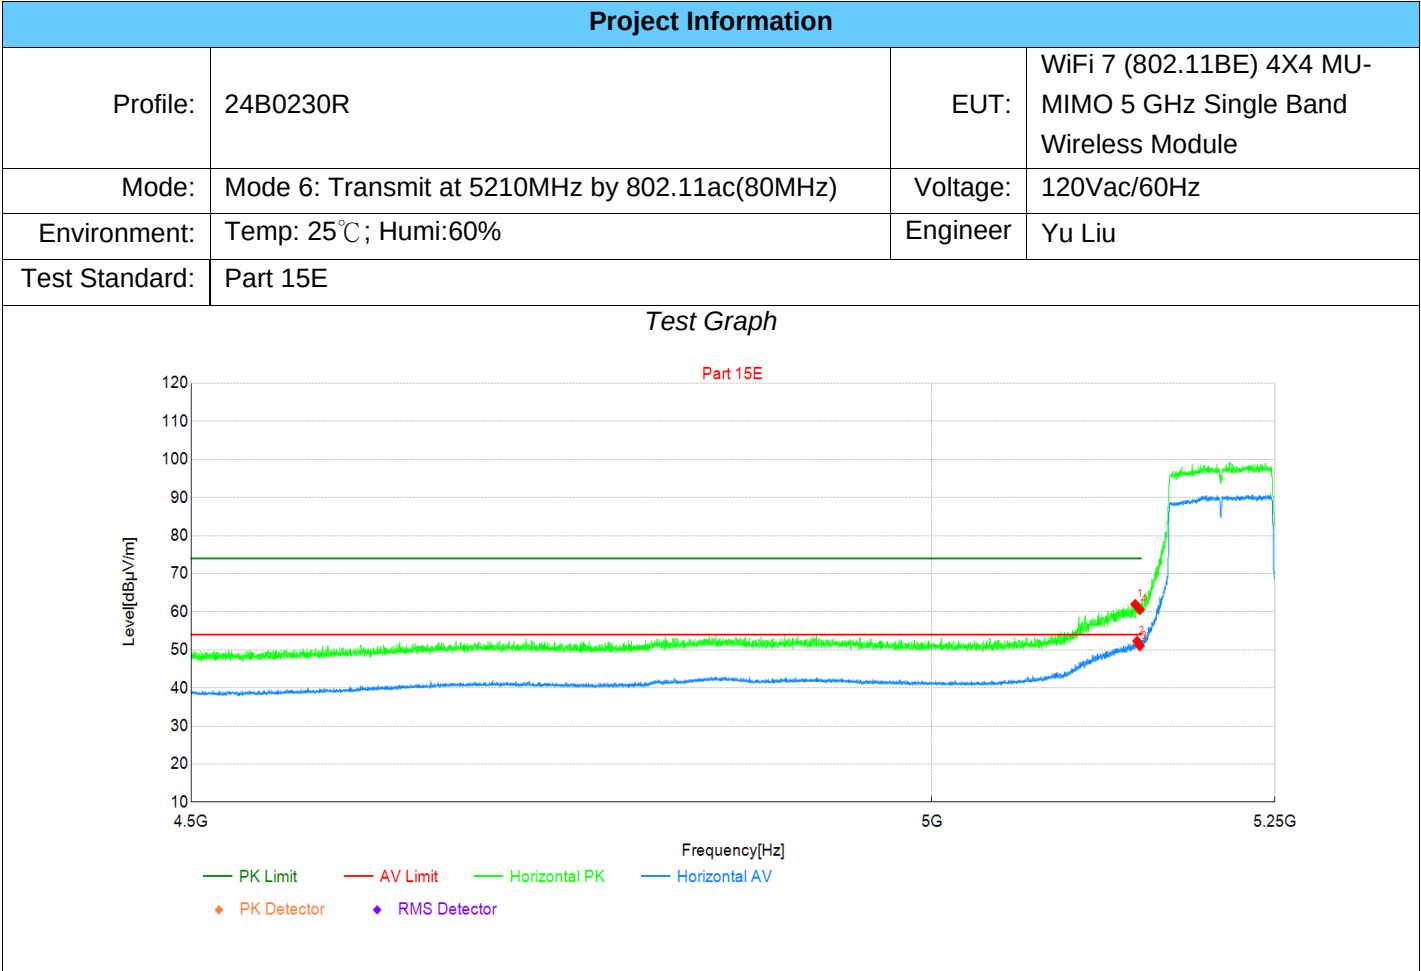

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5147            | 46.90          | 61.99          | 15.09         | 74.00          | 12.01       | PK  | Horizo | PASS    |
| 2                   | 5148            | 37.20          | 52.30          | 15.10         | 54.00          | 1.70        | AV  | Horizo | PASS    |
| 3                   | 5150            | 35.94          | 51.05          | 15.11         | 54.00          | 2.95        | AV  | Horizo | PASS    |
| 4                   | 5150            | 45.47          | 60.58          | 15.11         | 74.00          | 13.42       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

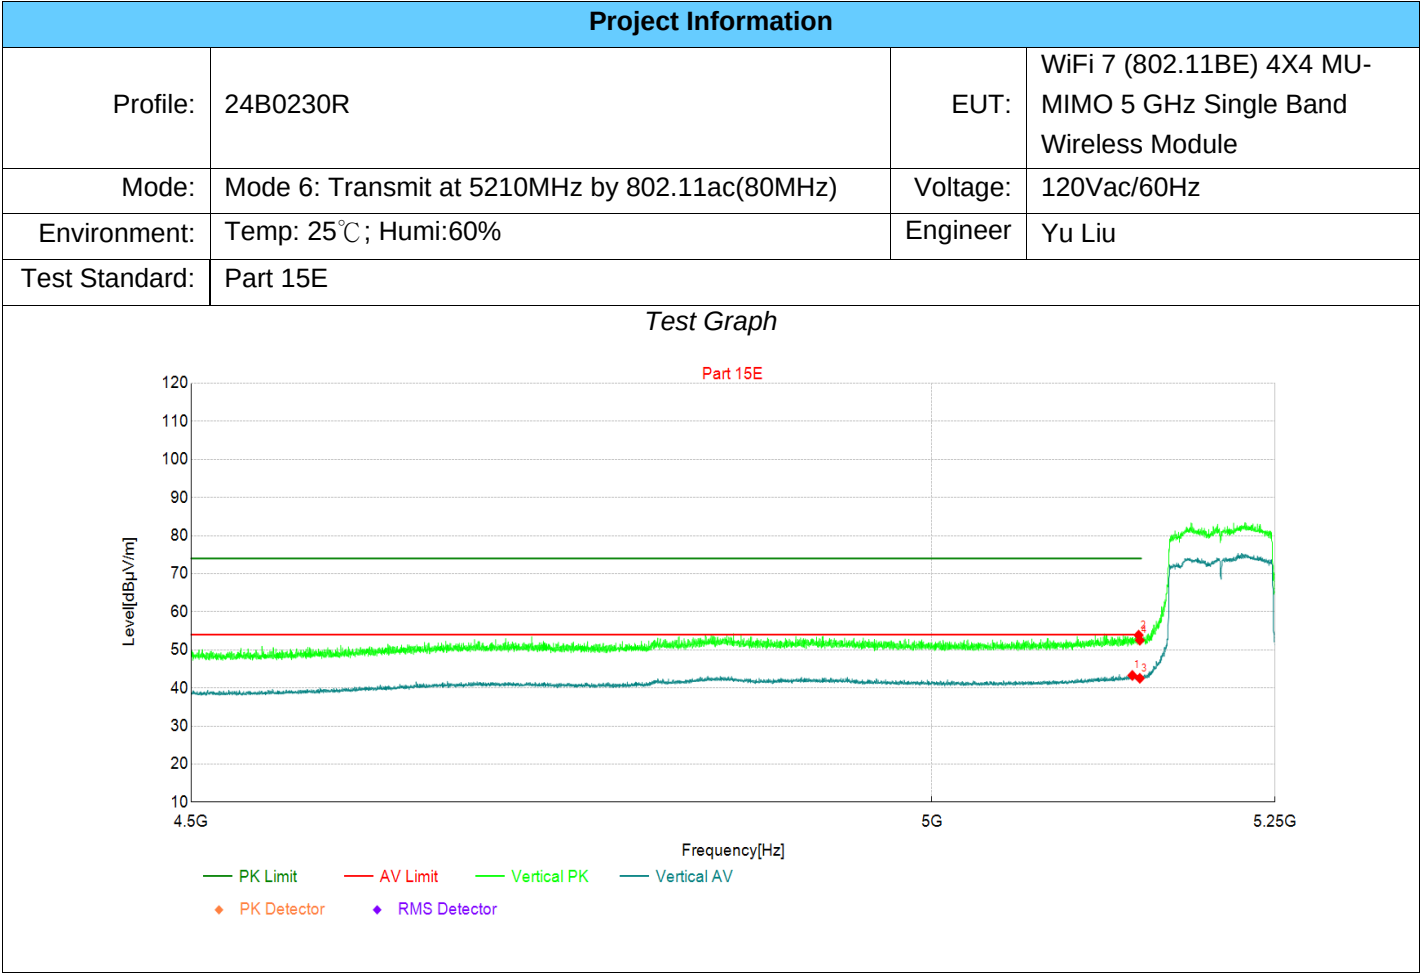

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5145            | 28.21          | 43.29          | 15.08         | 54.00          | 10.71       | AV  | Vertic | PASS    |
| 2                   | 5149            | 38.76          | 53.86          | 15.10         | 74.00          | 20.14       | PK  | Vertic | PASS    |
| 3                   | 5150            | 27.42          | 42.53          | 15.11         | 54.00          | 11.47       | AV  | Vertic | PASS    |
| 4                   | 5150            | 37.42          | 52.53          | 15.11         | 74.00          | 21.47       | PK  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

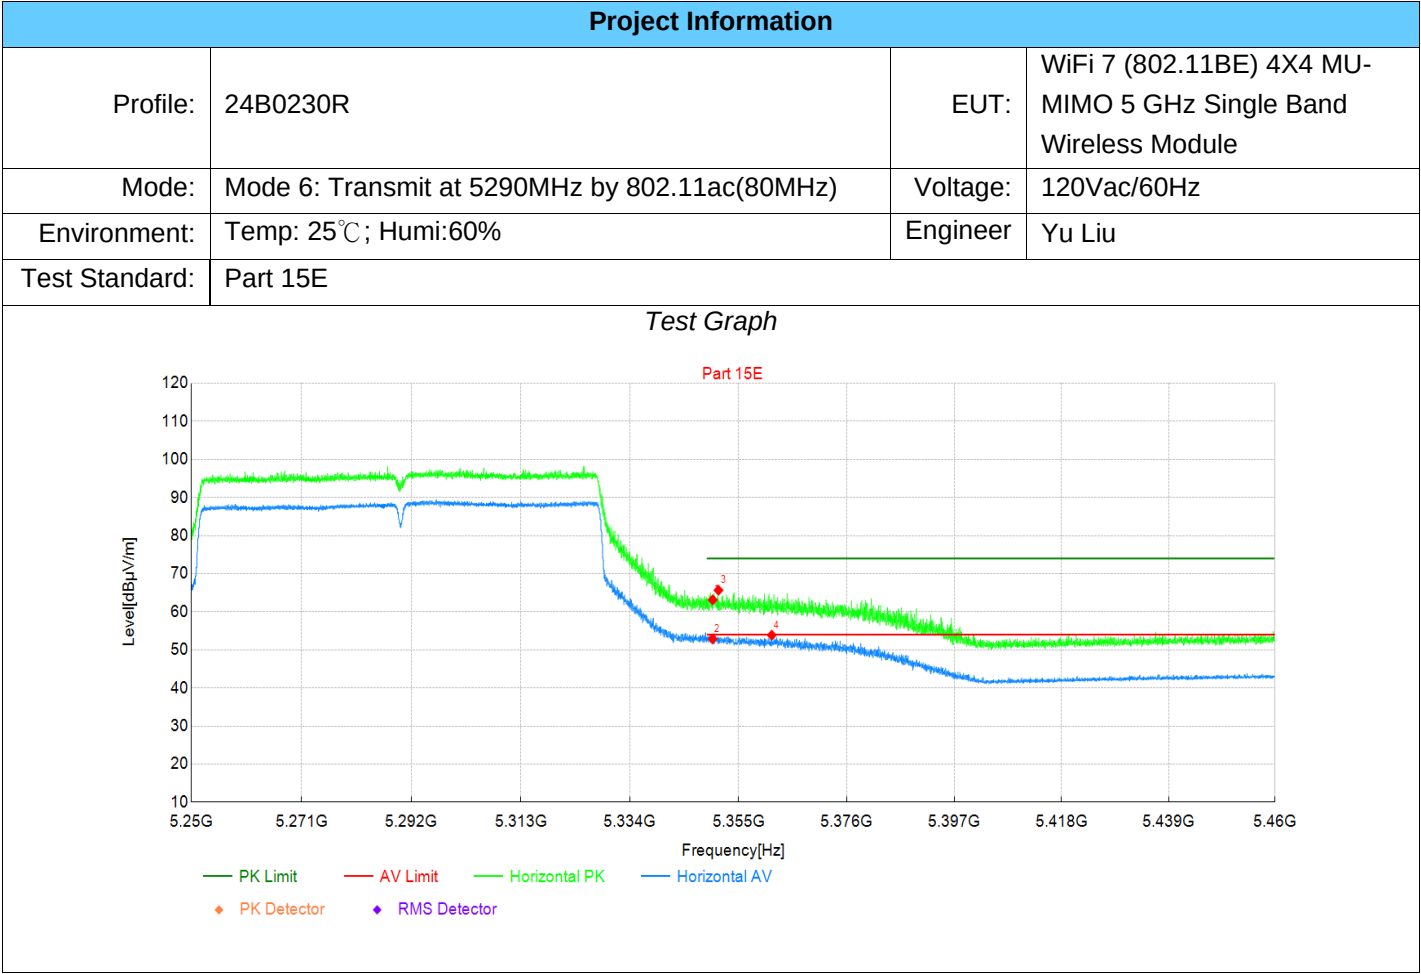

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 47.42          | 63.13          | 15.71         | 74.00          | 10.87       | PK  | Horizo | PASS    |
| 2                   | 5350            | 37.17          | 52.88          | 15.71         | 54.00          | 1.12        | AV  | Horizo | PASS    |
| 3                   | 5351            | 49.96          | 65.67          | 15.71         | 74.00          | 8.33        | PK  | Horizo | PASS    |
| 4                   | 5361            | 38.17          | 53.86          | 15.69         | 54.00          | 0.14        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C; Humi:60%                           | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

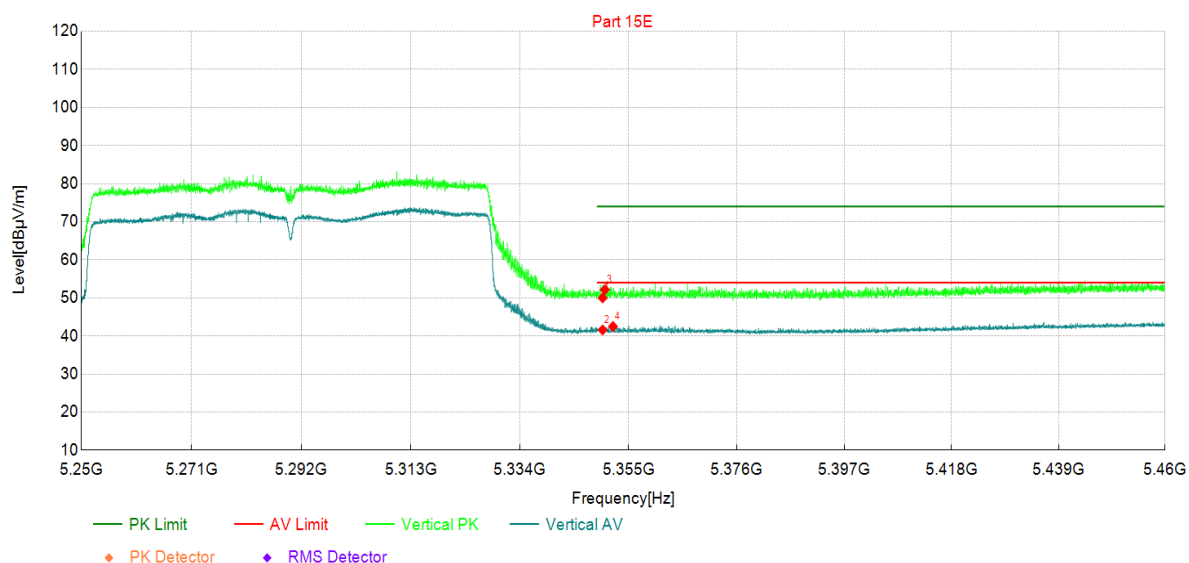

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5350            | 34.28          | 49.99          | 15.71         | 74.00          | 24.01       | PK  | Vertic | PASS    |
| 2  | 5350            | 25.88          | 41.59          | 15.71         | 54.00          | 12.41       | AV  | Vertic | PASS    |
| 3  | 5350            | 36.43          | 52.14          | 15.71         | 74.00          | 21.86       | PK  | Vertic | PASS    |
| 4  | 5352            | 26.78          | 42.49          | 15.71         | 54.00          | 11.51       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

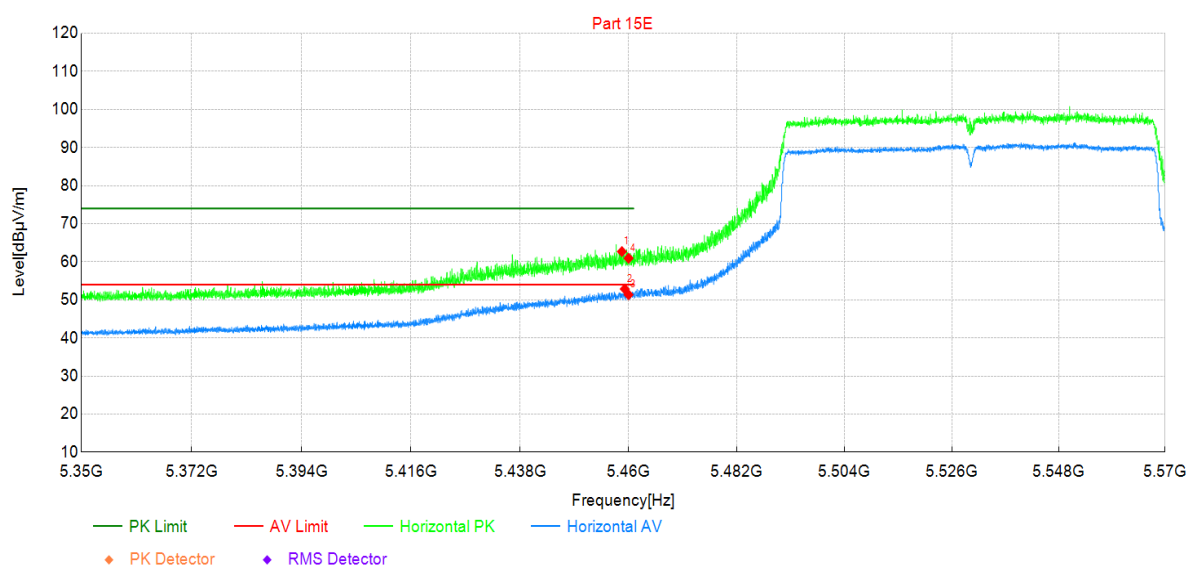


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5459            | 46.37          | 62.69          | 16.32         | 74.00          | 11.31       | PK  | Horizo | PASS    |
| 2  | 5459            | 36.52          | 52.85          | 16.33         | 54.00          | 1.15        | AV  | Horizo | PASS    |
| 3  | 5460            | 35.01          | 51.35          | 16.34         | 54.00          | 2.65        | AV  | Horizo | PASS    |
| 4  | 5460            | 44.58          | 60.92          | 16.34         | 74.00          | 13.08       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

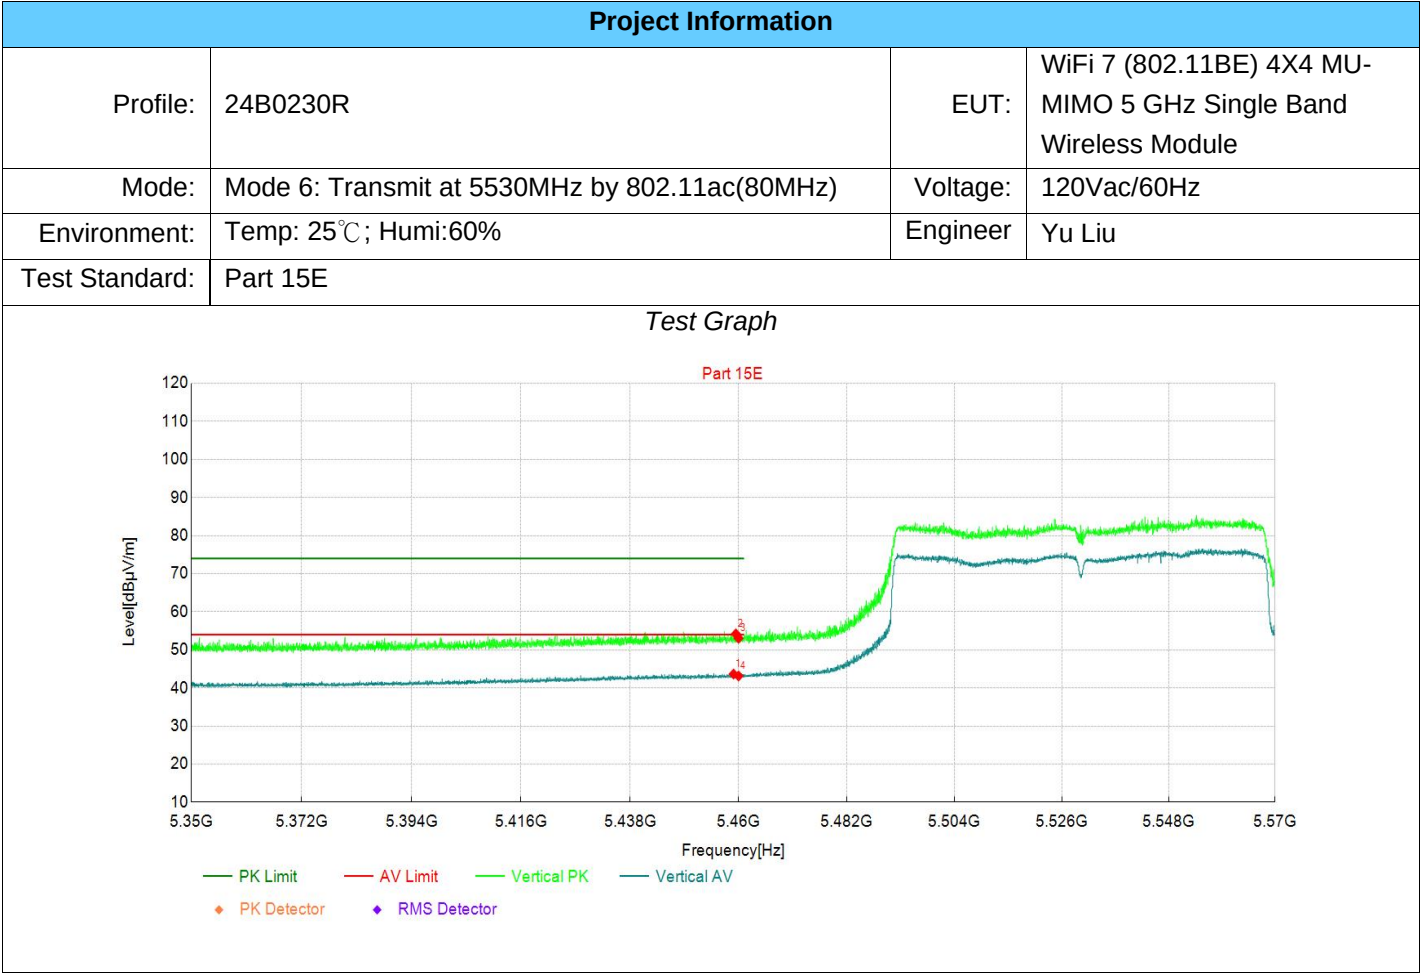

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 27.31          | 43.64          | 16.33         | 54.00          | 10.36       | AV  | Vertic | PASS    |
| 2                   | 5459            | 37.86          | 54.20          | 16.34         | 74.00          | 19.80       | PK  | Vertic | PASS    |
| 3                   | 5460            | 36.72          | 53.06          | 16.34         | 74.00          | 20.94       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.81          | 43.15          | 16.34         | 54.00          | 10.85       | AV  | Vertic | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 7: Transmit at 5250MHz by 802.11ac(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

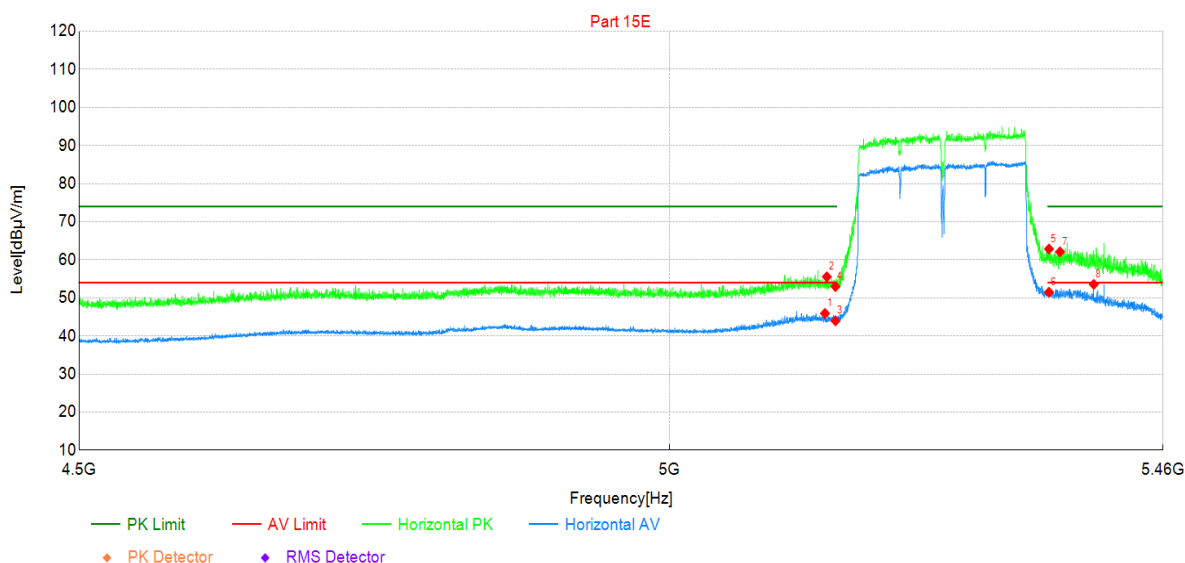

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5140            | 30.86          | 45.91          | 15.05         | 54.00          | 8.09        | AV  | Horizo | PASS    |
| 2  | 5142            | 40.48          | 55.54          | 15.06         | 74.00          | 18.46       | PK  | Horizo | PASS    |
| 3  | 5150            | 28.85          | 43.96          | 15.11         | 54.00          | 10.04       | AV  | Horizo | PASS    |
| 4  | 5150            | 37.85          | 52.96          | 15.11         | 74.00          | 21.04       | PK  | Horizo | PASS    |
| 5  | 5350            | 47.15          | 62.86          | 15.71         | 74.00          | 11.14       | PK  | Horizo | PASS    |
| 6  | 5350            | 35.78          | 51.49          | 15.71         | 54.00          | 2.51        | AV  | Horizo | PASS    |
| 7  | 5361            | 46.40          | 62.10          | 15.70         | 74.00          | 11.90       | PK  | Horizo | PASS    |
| 8  | 5393            | 37.88          | 53.54          | 15.66         | 54.00          | 0.46        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 7: Transmit at 5250MHz by 802.11ac(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

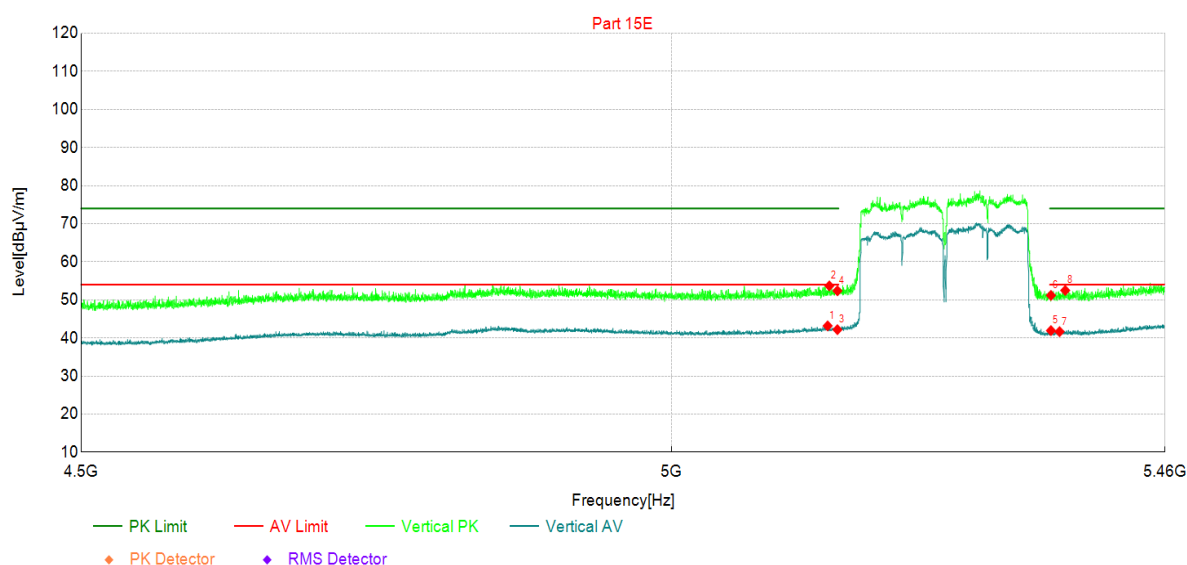


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5141            | 28.11          | 43.17          | 15.06         | 54.00          | 10.83       | AV  | Vertic | PASS    |
| 2  | 5143            | 38.61          | 53.68          | 15.07         | 74.00          | 20.32       | PK  | Vertic | PASS    |
| 3  | 5150            | 27.07          | 42.18          | 15.11         | 54.00          | 11.82       | AV  | Vertic | PASS    |
| 4  | 5150            | 37.27          | 52.38          | 15.11         | 74.00          | 21.62       | PK  | Vertic | PASS    |
| 5  | 5350            | 26.22          | 41.93          | 15.71         | 54.00          | 12.07       | AV  | Vertic | PASS    |
| 6  | 5350            | 35.46          | 51.17          | 15.71         | 74.00          | 22.83       | PK  | Vertic | PASS    |
| 7  | 5358            | 25.95          | 41.65          | 15.70         | 54.00          | 12.35       | AV  | Vertic | PASS    |
| 8  | 5364            | 36.80          | 52.49          | 15.69         | 74.00          | 21.51       | PK  | Vertic | PASS    |

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level


Test Report

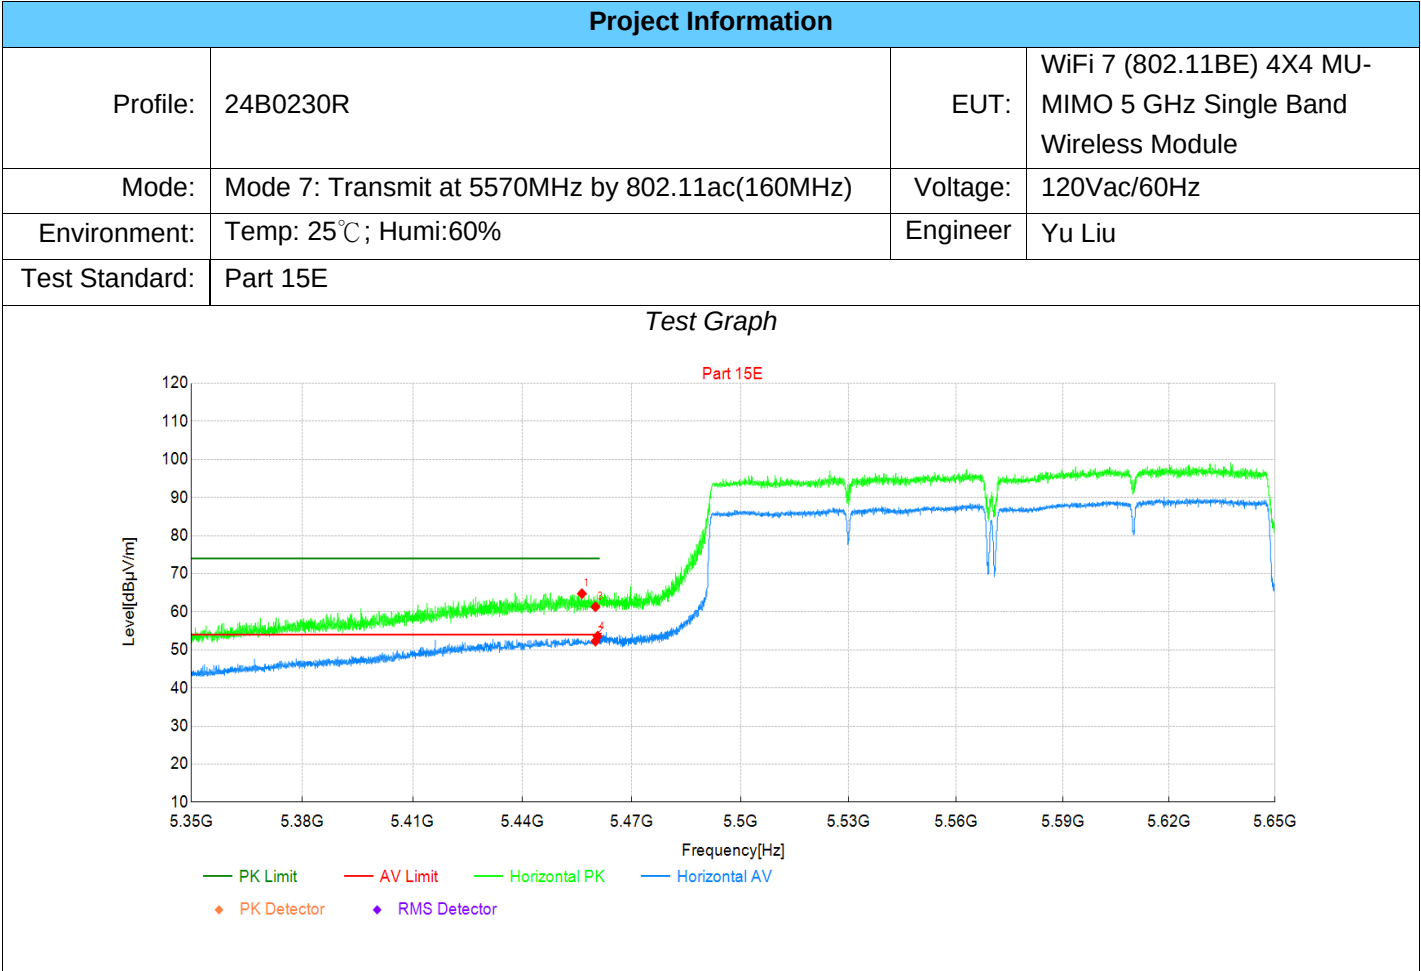

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5456            | 48.46          | 64.76          | 16.30         | 74.00          | 9.24        | PK  | Horizo | PASS    |
| 2                   | 5460            | 35.93          | 52.27          | 16.34         | 54.00          | 1.73        | AV  | Horizo | PASS    |
| 3                   | 5460            | 44.97          | 61.31          | 16.34         | 74.00          | 12.69       | PK  | Horizo | PASS    |
| 4                   | 5461            | 37.25          | 53.60          | 16.35         | 54.00          | 0.40        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

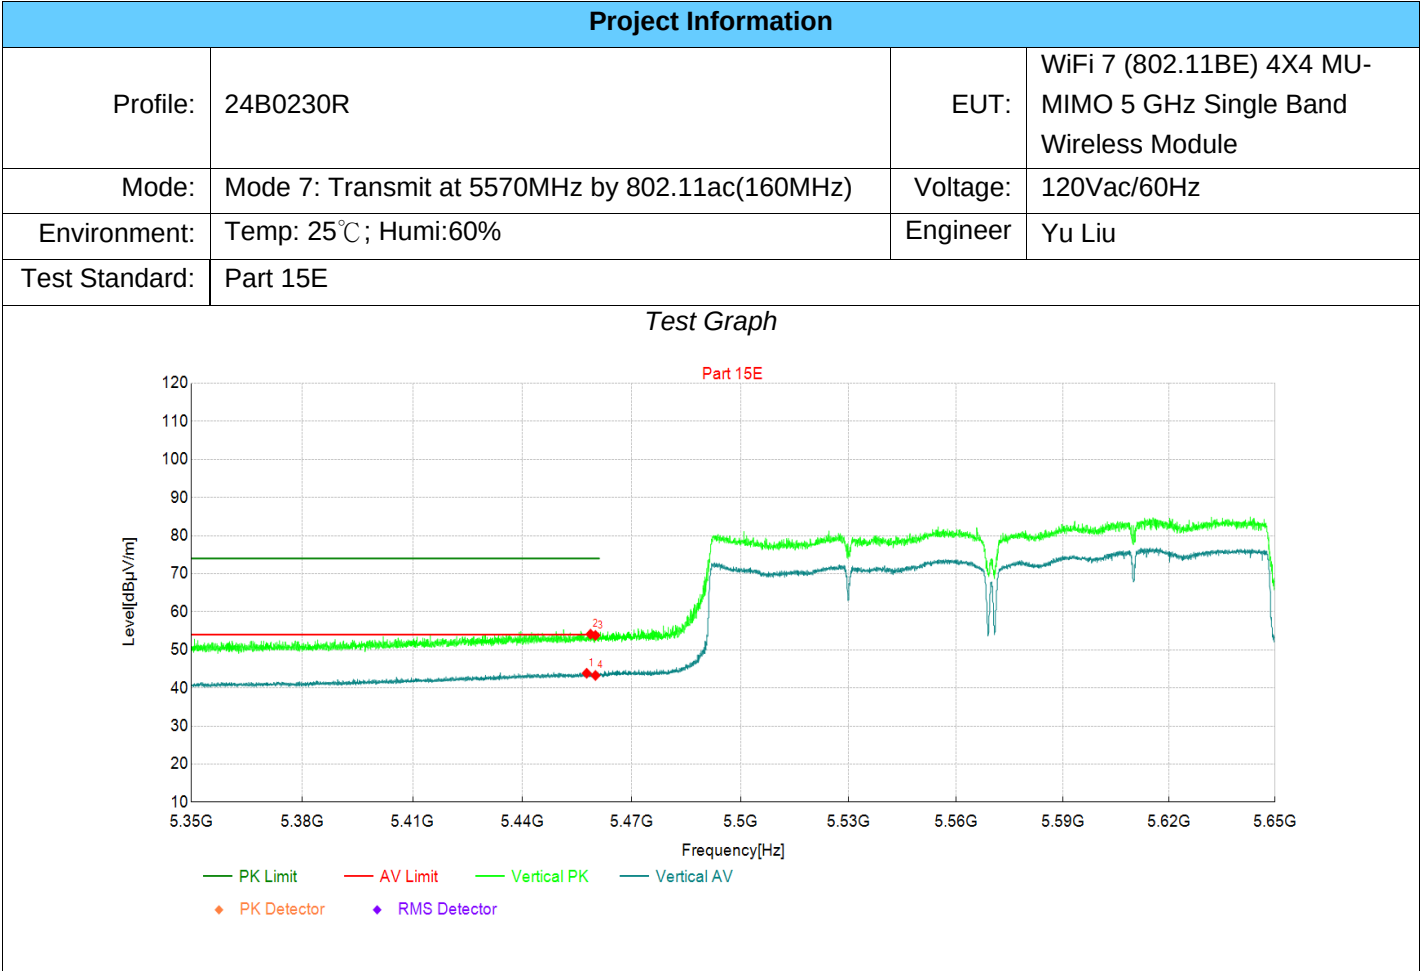

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 27.54          | 43.85          | 16.31         | 54.00          | 10.15       | AV  | Vertic | PASS    |
| 2                   | 5459            | 37.81          | 54.13          | 16.32         | 74.00          | 19.87       | PK  | Vertic | PASS    |
| 3                   | 5460            | 37.45          | 53.79          | 16.34         | 74.00          | 20.21       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.94          | 43.28          | 16.34         | 54.00          | 10.72       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

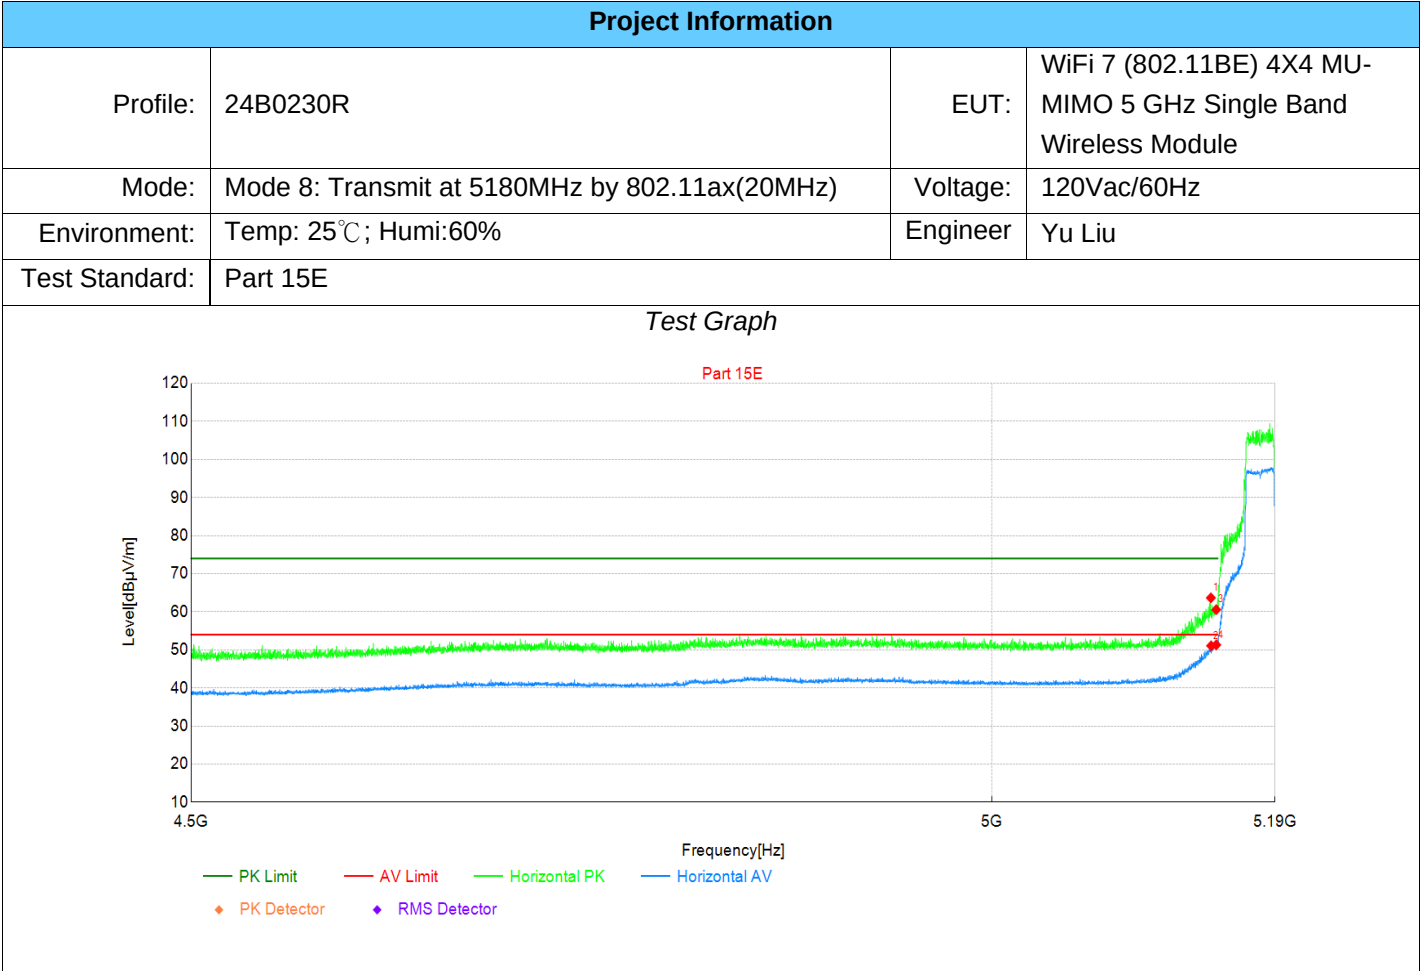

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5146            | 48.57          | 63.66          | 15.09         | 74.00          | 10.34       | PK  | Horizo | PASS    |
| 2                   | 5147            | 35.97          | 51.06          | 15.09         | 54.00          | 2.94        | AV  | Horizo | PASS    |
| 3                   | 5150            | 45.45          | 60.56          | 15.11         | 74.00          | 13.44       | PK  | Horizo | PASS    |
| 4                   | 5150            | 36.19          | 51.30          | 15.11         | 54.00          | 2.70        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 8: Transmit at 5180MHz by 802.11ax(20MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

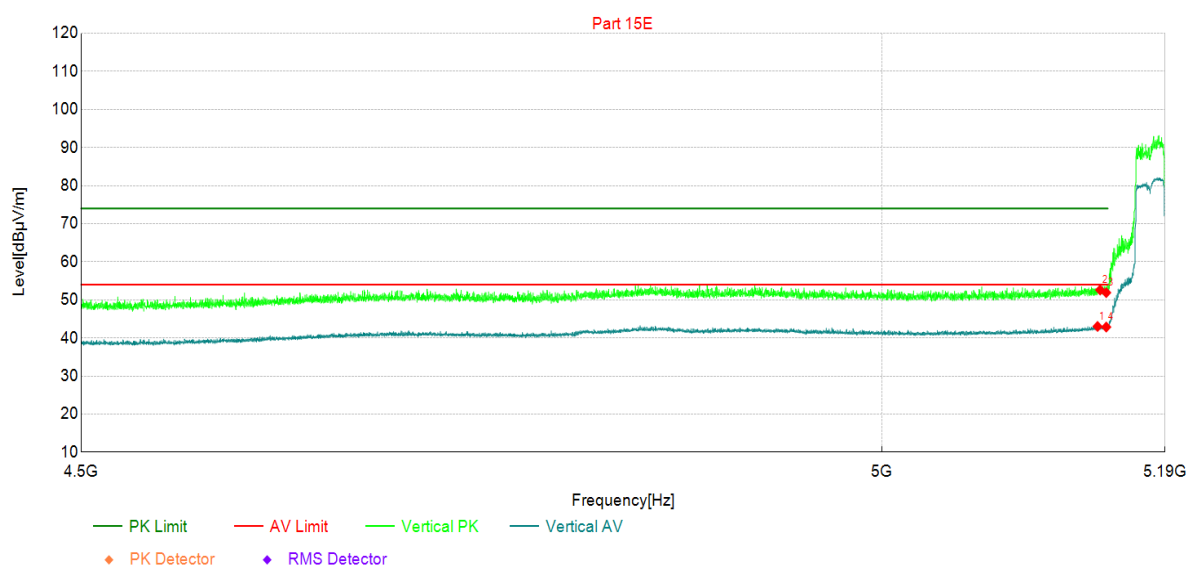

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5144            | 27.95          | 43.03          | 15.08         | 54.00          | 10.97       | AV  | Vertic | PASS    |
| 2  | 5146            | 37.51          | 52.60          | 15.09         | 74.00          | 21.40       | PK  | Vertic | PASS    |
| 3  | 5150            | 36.79          | 51.90          | 15.11         | 74.00          | 22.10       | PK  | Vertic | PASS    |
| 4  | 5150            | 27.75          | 42.86          | 15.11         | 54.00          | 11.14       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 8: Transmit at 5320MHz by 802.11ax(20MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

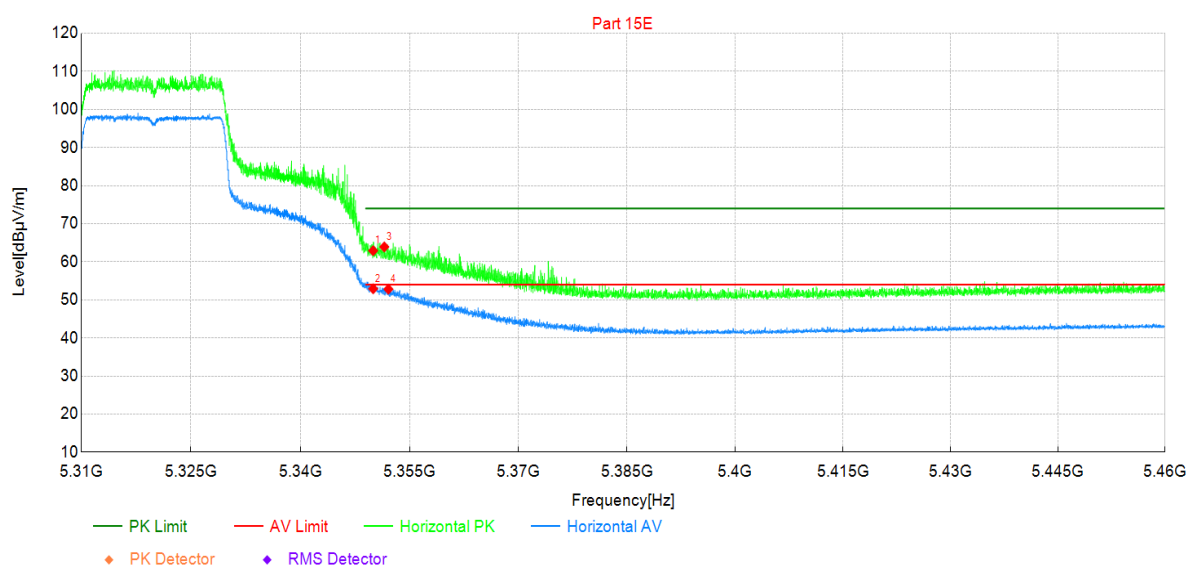


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5350            | 47.20          | 62.91          | 15.71         | 74.00          | 11.09       | PK  | Horizo | PASS    |
| 2  | 5350            | 37.20          | 52.91          | 15.71         | 54.00          | 1.09        | AV  | Horizo | PASS    |
| 3  | 5352            | 48.21          | 63.92          | 15.71         | 74.00          | 10.08       | PK  | Horizo | PASS    |
| 4  | 5352            | 37.11          | 52.82          | 15.71         | 54.00          | 1.18        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

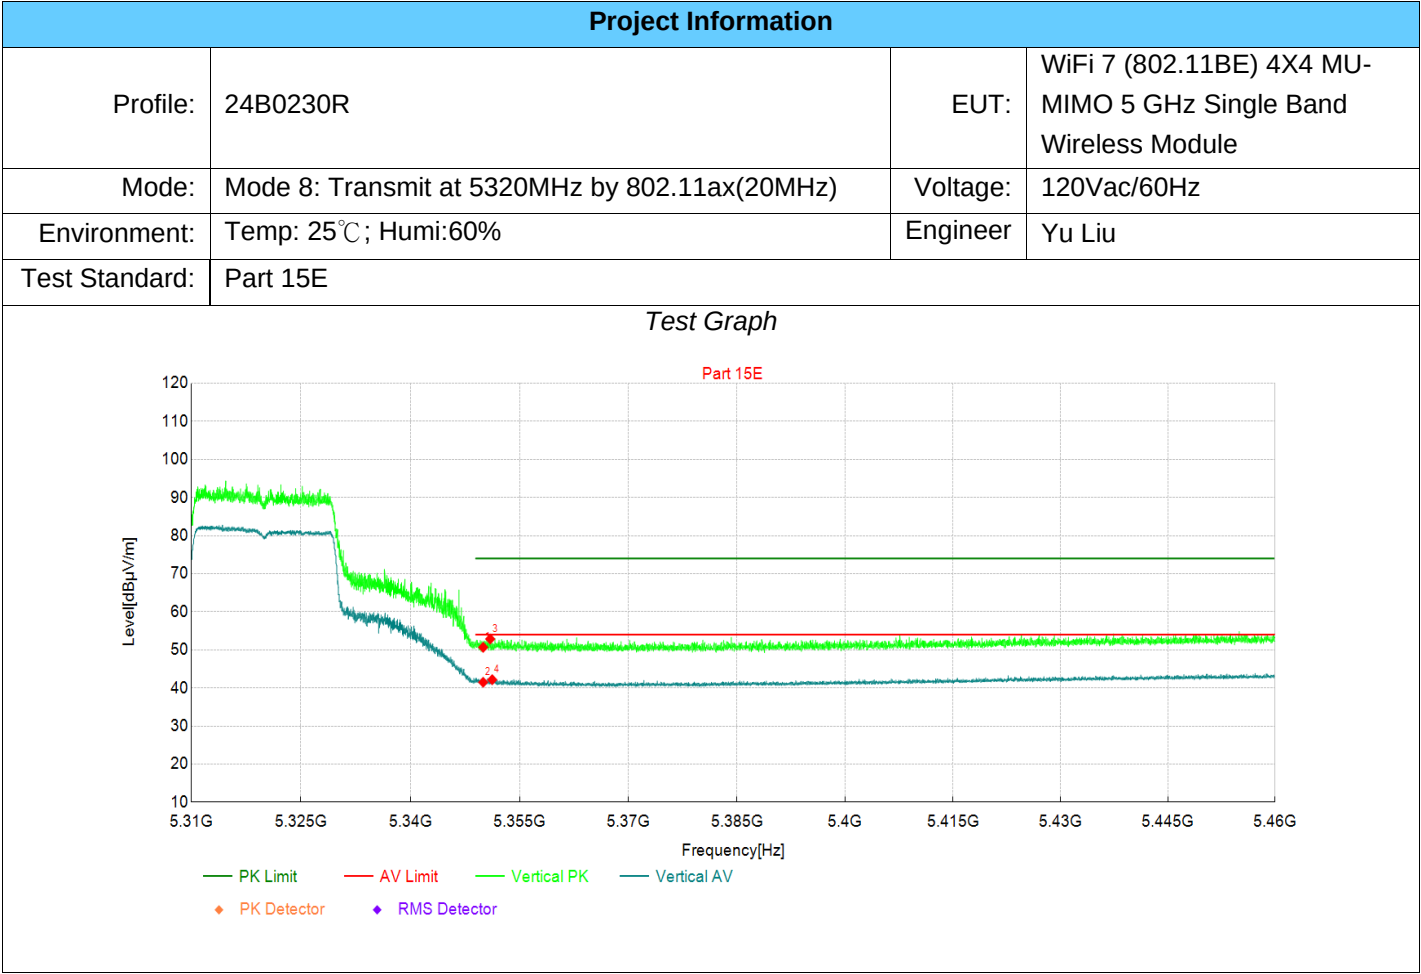

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 34.96          | 50.67          | 15.71         | 74.00          | 23.33       | PK  | Vertic | PASS    |
| 2                   | 5350            | 25.78          | 41.49          | 15.71         | 54.00          | 12.51       | AV  | Vertic | PASS    |
| 3                   | 5351            | 37.15          | 52.86          | 15.71         | 74.00          | 21.14       | PK  | Vertic | PASS    |
| 4                   | 5351            | 26.46          | 42.17          | 15.71         | 54.00          | 11.83       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

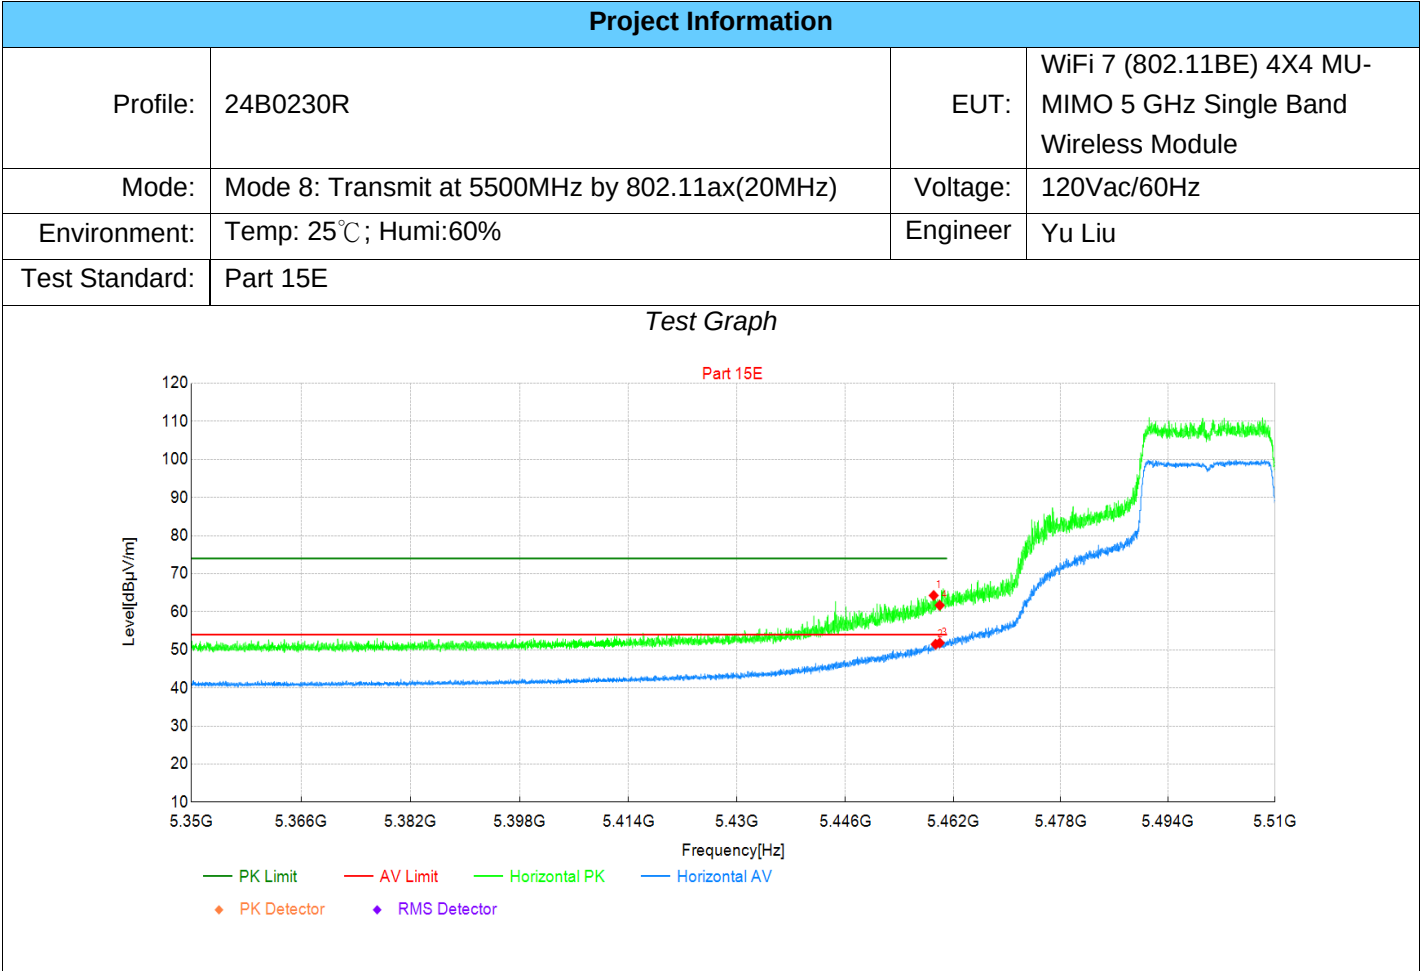

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 47.95          | 64.28          | 16.33         | 74.00          | 9.72        | PK  | Horizo | PASS    |
| 2                   | 5459            | 35.13          | 51.47          | 16.34         | 54.00          | 2.53        | AV  | Horizo | PASS    |
| 3                   | 5460            | 35.48          | 51.82          | 16.34         | 54.00          | 2.18        | AV  | Horizo | PASS    |
| 4                   | 5460            | 45.37          | 61.71          | 16.34         | 74.00          | 12.29       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

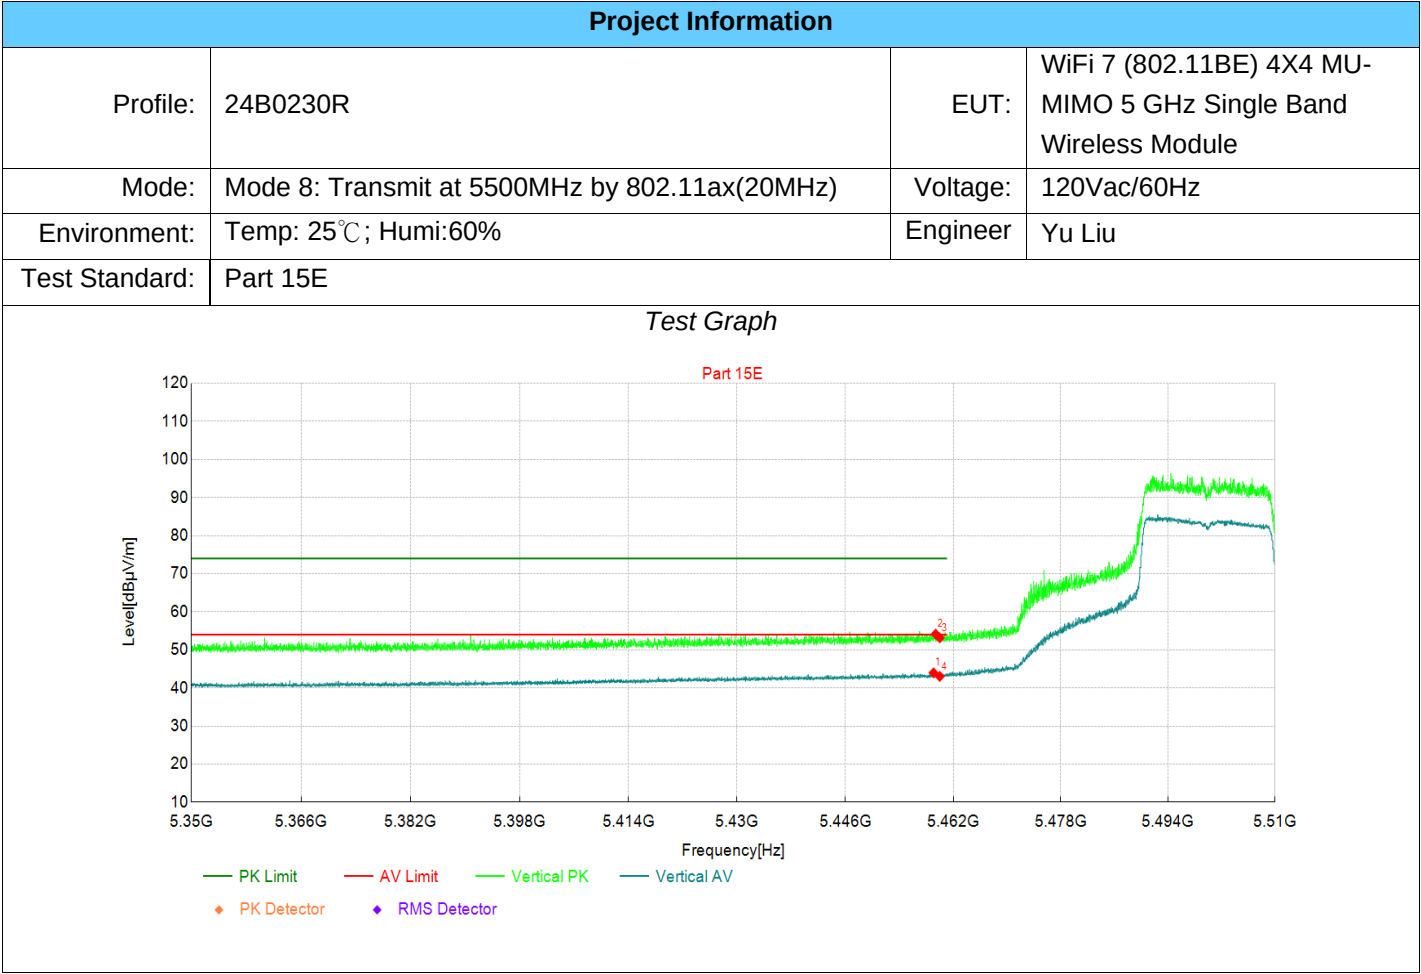

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 27.63          | 43.96          | 16.33         | 54.00          | 10.04       | AV  | Vertic | PASS    |
| 2                   | 5459            | 37.79          | 54.13          | 16.34         | 74.00          | 19.87       | PK  | Vertic | PASS    |
| 3                   | 5460            | 36.82          | 53.16          | 16.34         | 74.00          | 20.84       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.69          | 43.03          | 16.34         | 54.00          | 10.97       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

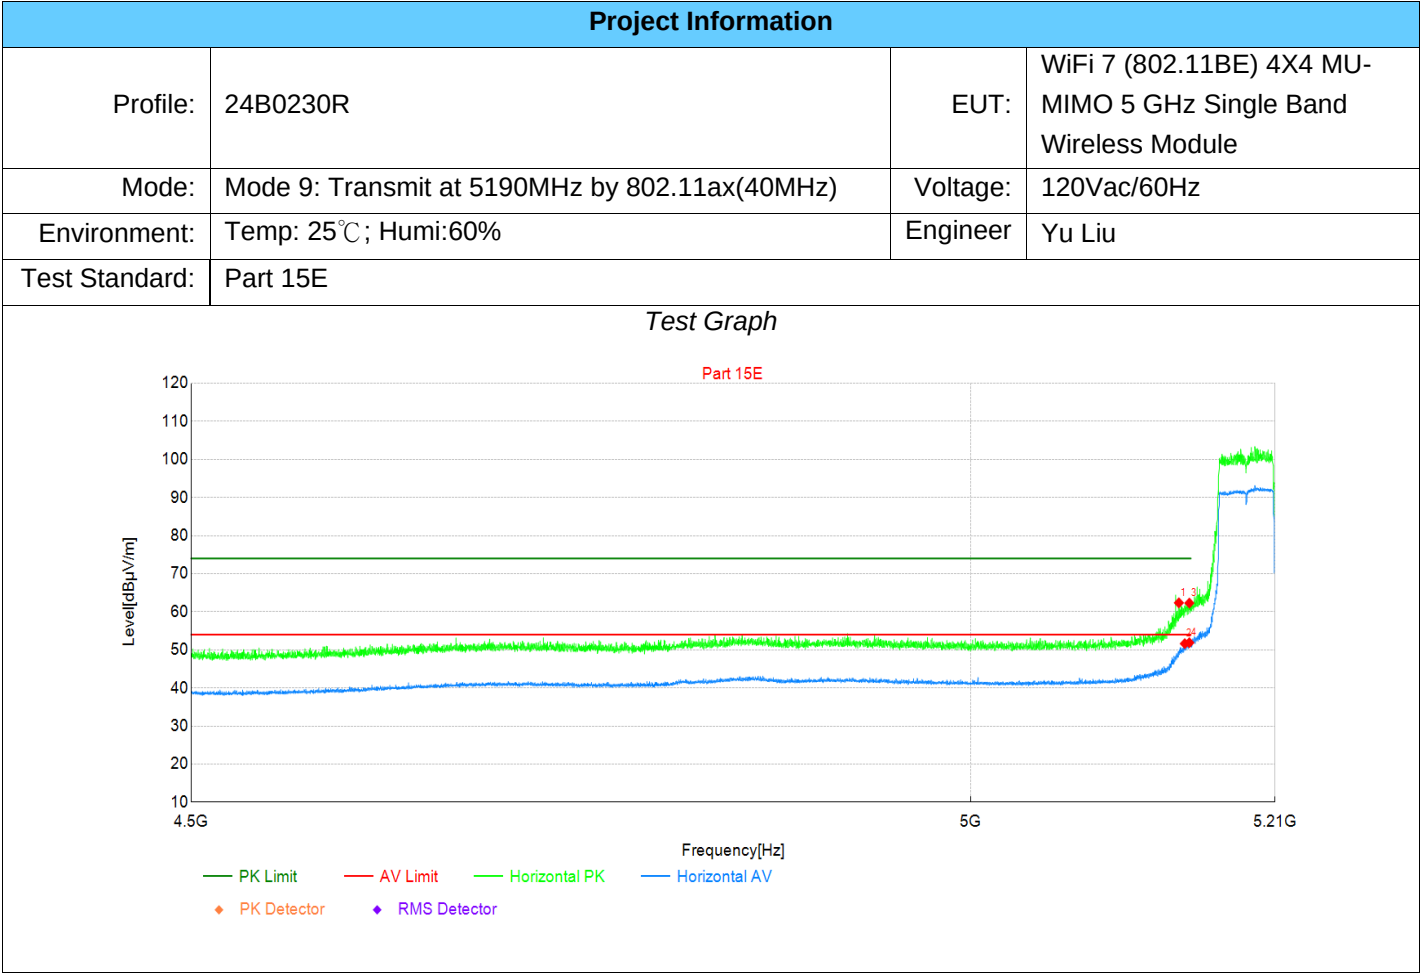

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5143            | 47.29          | 62.36          | 15.07         | 74.00          | 11.64       | PK  | Horizo | PASS    |
| 2                   | 5147            | 36.55          | 51.64          | 15.09         | 54.00          | 2.36        | AV  | Horizo | PASS    |
| 3                   | 5150            | 47.18          | 62.29          | 15.11         | 74.00          | 11.71       | PK  | Horizo | PASS    |
| 4                   | 5150            | 36.77          | 51.88          | 15.11         | 54.00          | 2.12        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 9: Transmit at 5190MHz by 802.11ax(40MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C; Humi:60%                           | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

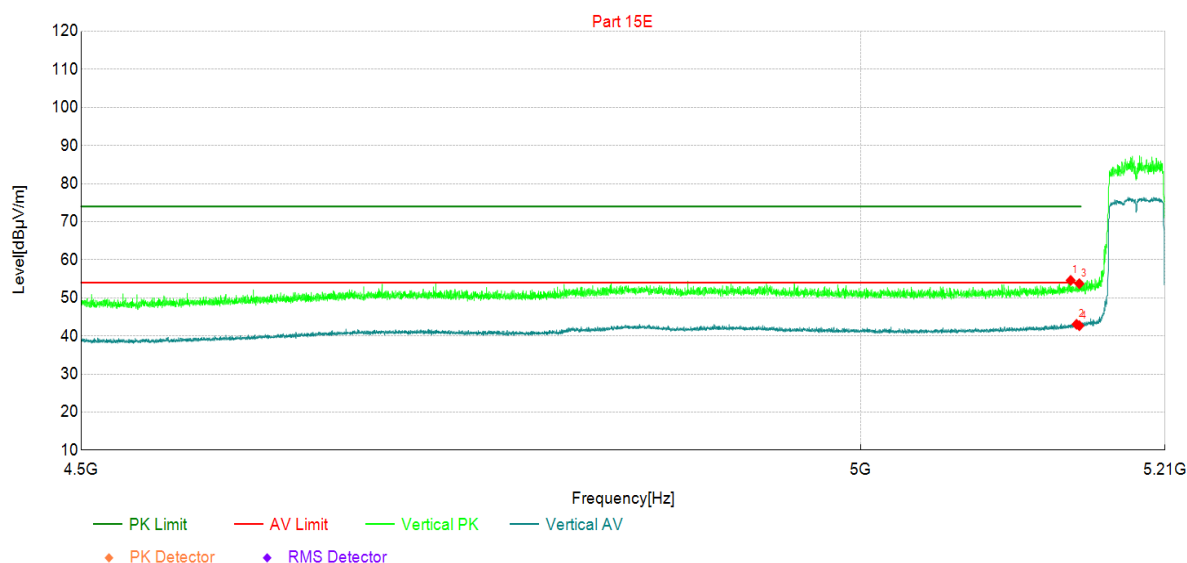


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5144            | 39.52          | 54.60          | 15.08         | 74.00          | 19.40       | PK  | Vertic | PASS    |
| 2  | 5148            | 27.96          | 43.06          | 15.10         | 54.00          | 10.94       | AV  | Vertic | PASS    |
| 3  | 5150            | 38.61          | 53.72          | 15.11         | 74.00          | 20.28       | PK  | Vertic | PASS    |
| 4  | 5150            | 27.58          | 42.69          | 15.11         | 54.00          | 11.31       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

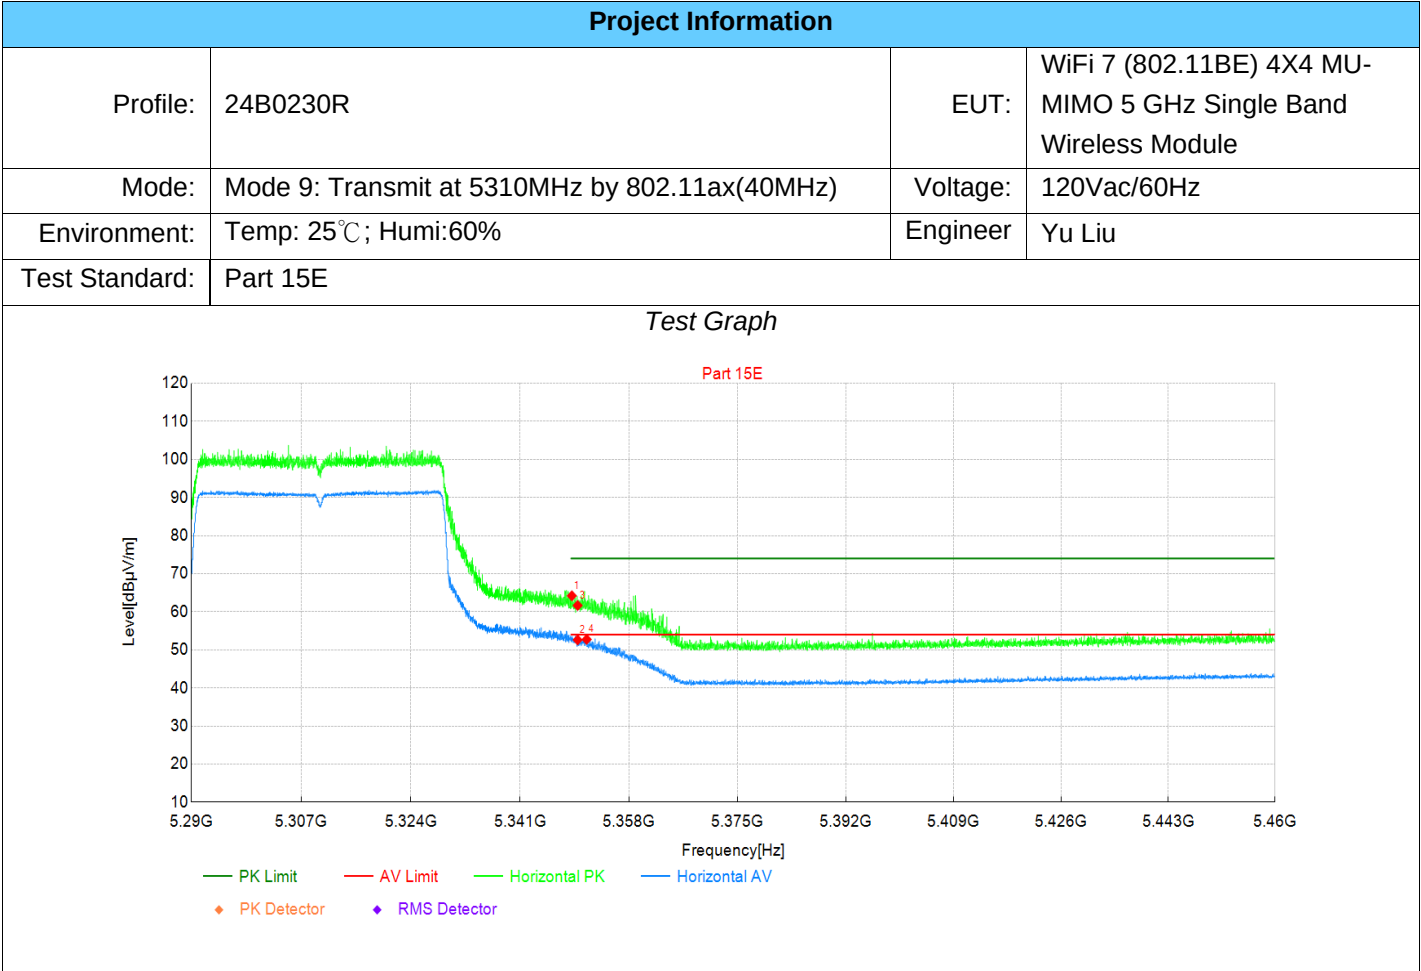

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5349            | 48.49          | 64.20          | 15.71         | 74.00          | 9.80        | PK  | Horizo | PASS    |
| 2                   | 5350            | 36.90          | 52.61          | 15.71         | 54.00          | 1.39        | AV  | Horizo | PASS    |
| 3                   | 5350            | 45.95          | 61.66          | 15.71         | 74.00          | 12.34       | PK  | Horizo | PASS    |
| 4                   | 5351            | 37.04          | 52.75          | 15.71         | 54.00          | 1.25        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

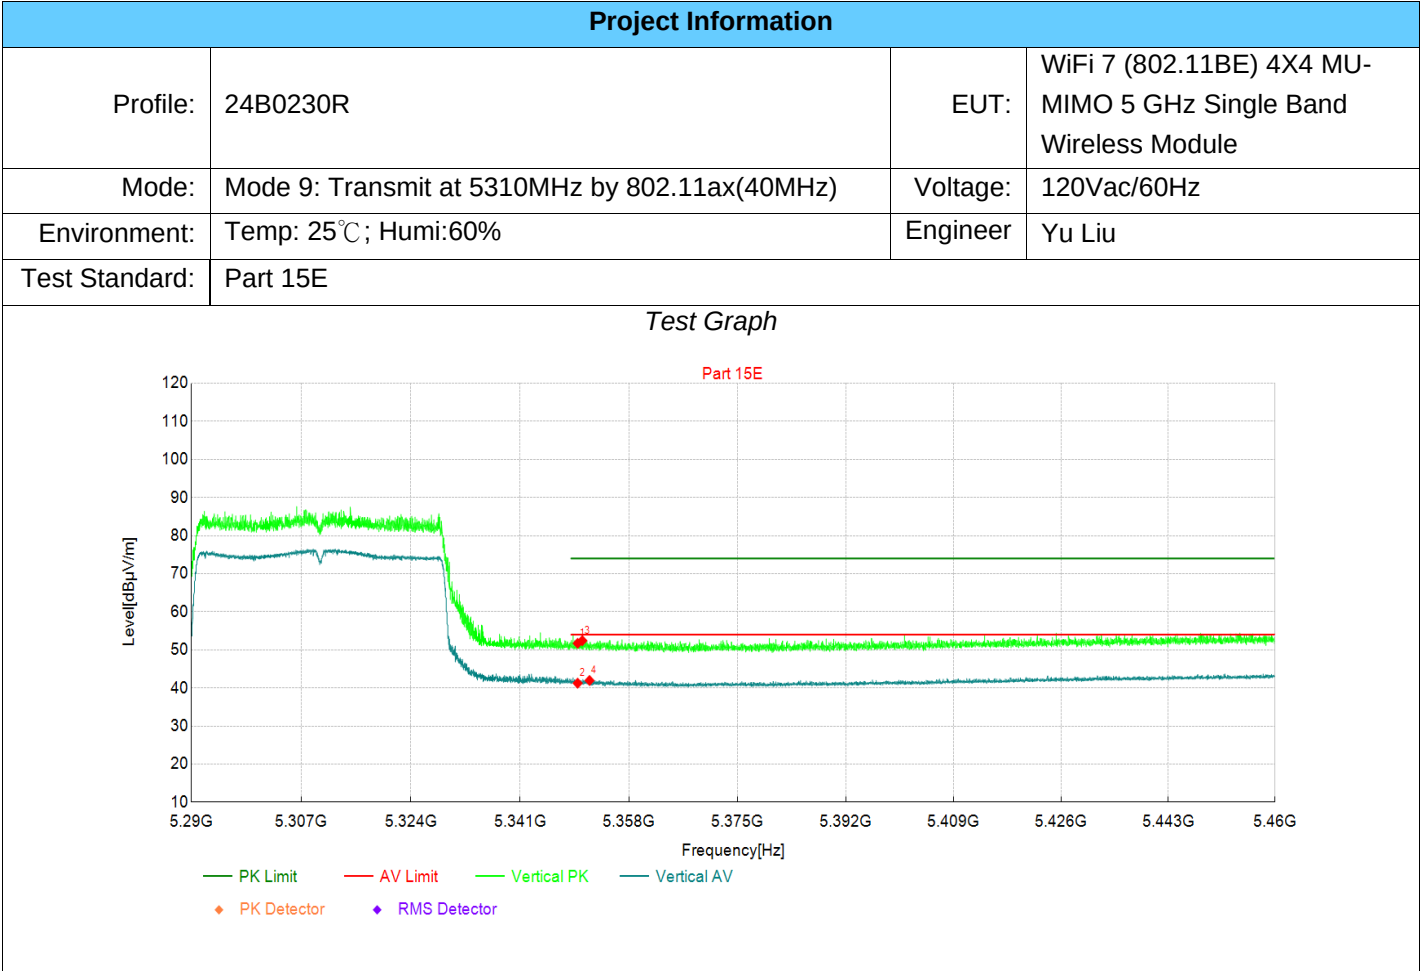

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 36.01          | 51.72          | 15.71         | 74.00          | 22.28       | PK  | Vertic | PASS    |
| 2                   | 5350            | 25.54          | 41.25          | 15.71         | 54.00          | 12.75       | AV  | Vertic | PASS    |
| 3                   | 5351            | 36.72          | 52.43          | 15.71         | 74.00          | 21.57       | PK  | Vertic | PASS    |
| 4                   | 5352            | 26.25          | 41.96          | 15.71         | 54.00          | 12.04       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

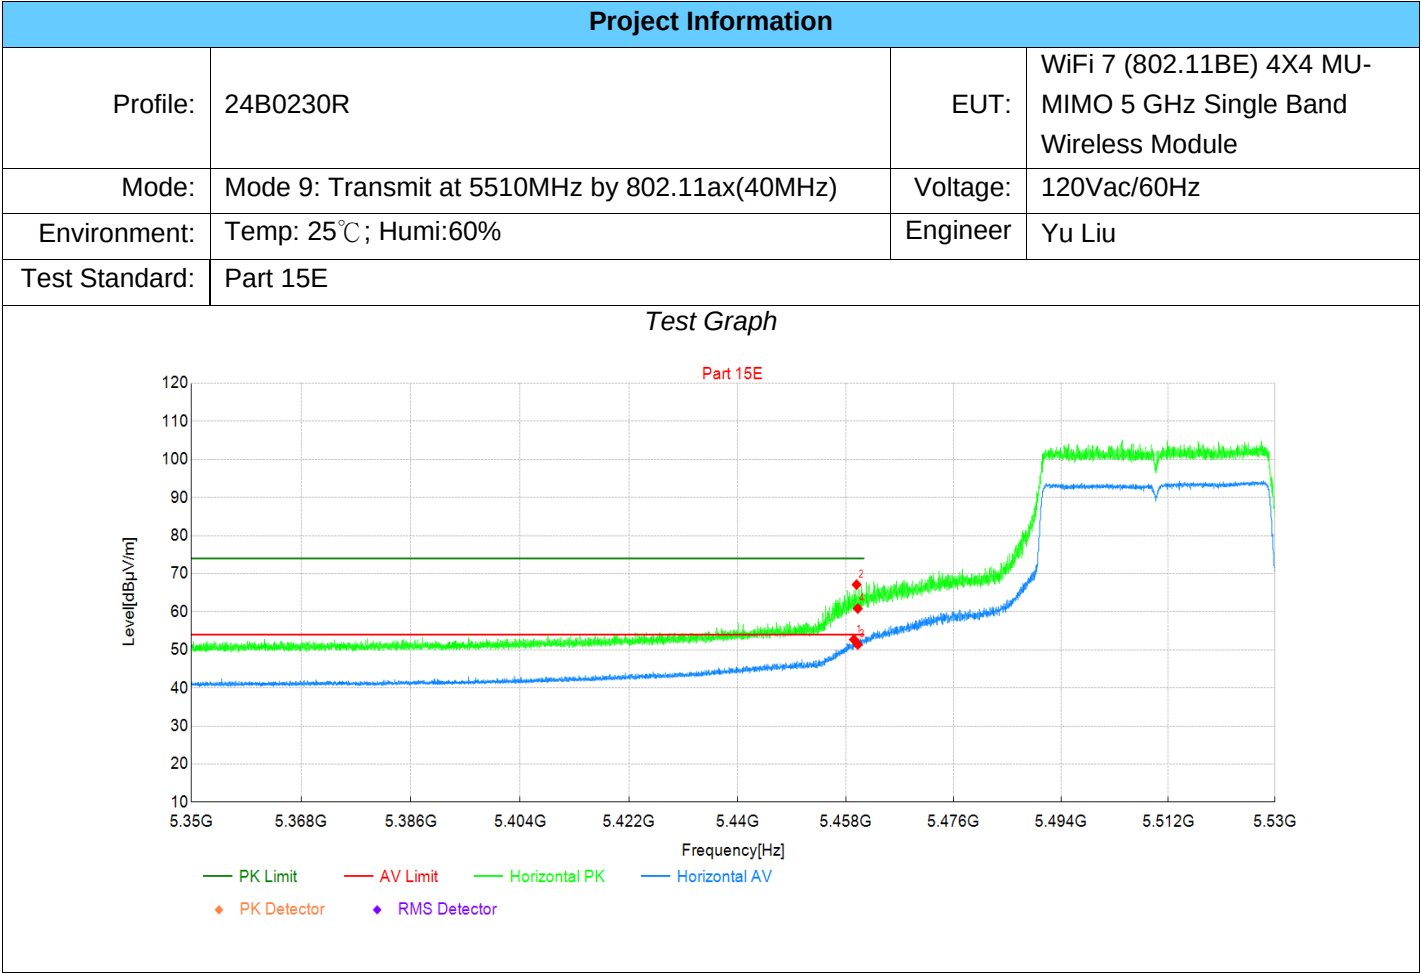

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 36.36          | 52.70          | 16.34         | 54.00          | 1.30        | AV  | Horizo | PASS    |
| 2                   | 5460            | 50.80          | 67.14          | 16.34         | 74.00          | 6.86        | PK  | Horizo | PASS    |
| 3                   | 5460            | 35.07          | 51.41          | 16.34         | 54.00          | 2.59        | AV  | Horizo | PASS    |
| 4                   | 5460            | 44.53          | 60.87          | 16.34         | 74.00          | 13.13       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

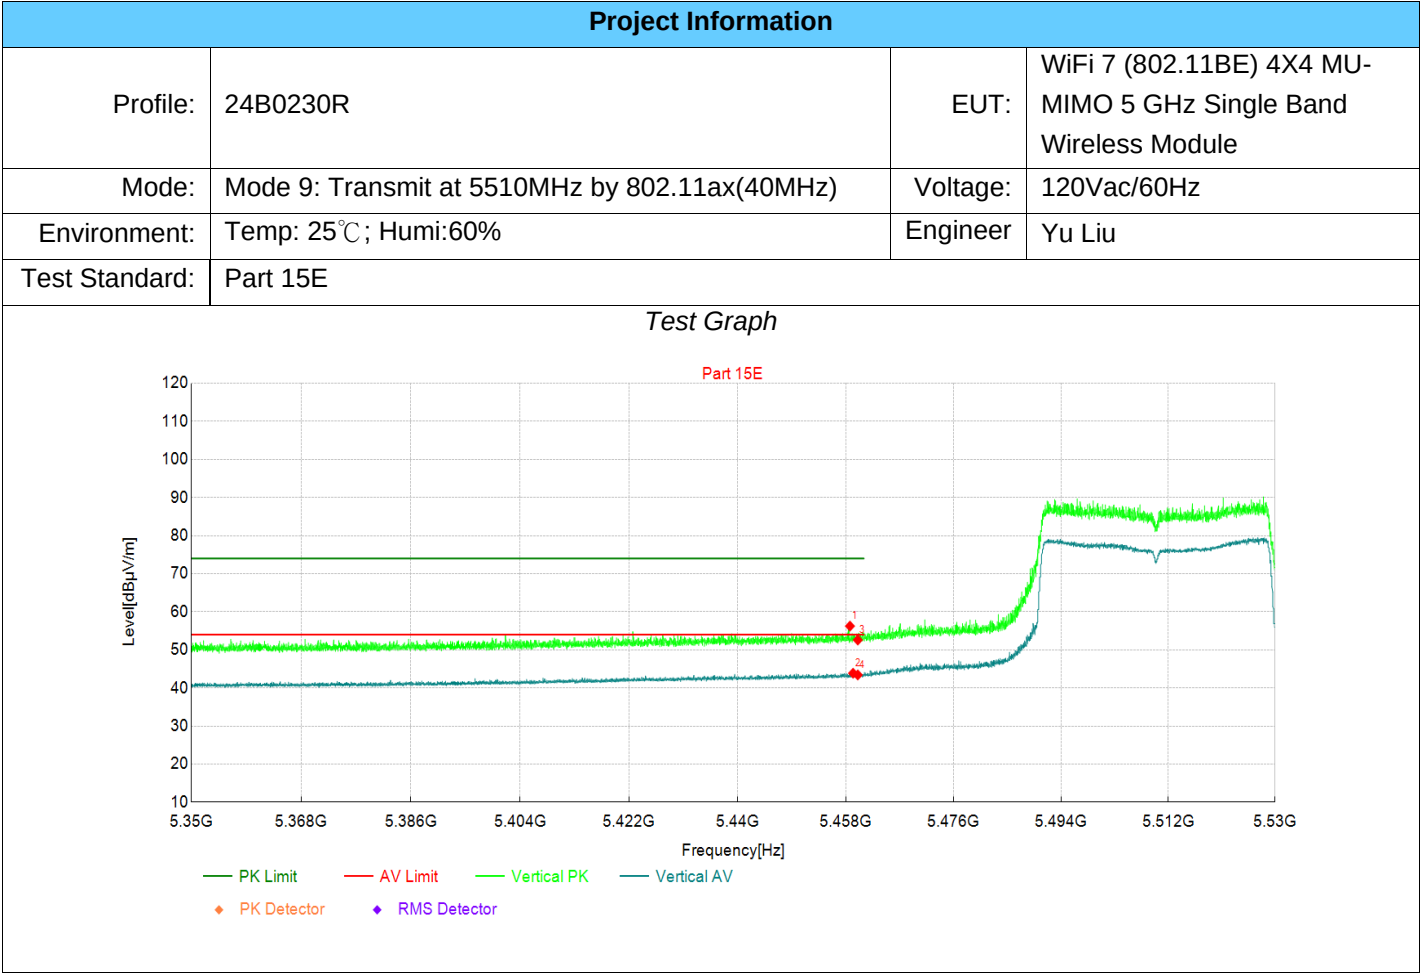

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 39.92          | 56.25          | 16.33         | 74.00          | 17.75       | PK  | Vertic | PASS    |
| 2                   | 5459            | 27.54          | 43.87          | 16.33         | 54.00          | 10.13       | AV  | Vertic | PASS    |
| 3                   | 5460            | 36.25          | 52.59          | 16.34         | 74.00          | 21.41       | PK  | Vertic | PASS    |
| 4                   | 5460            | 27.07          | 43.41          | 16.34         | 54.00          | 10.59       | AV  | Vertic | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 10: Transmit at 5210MHz by 802.11ax(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                           | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

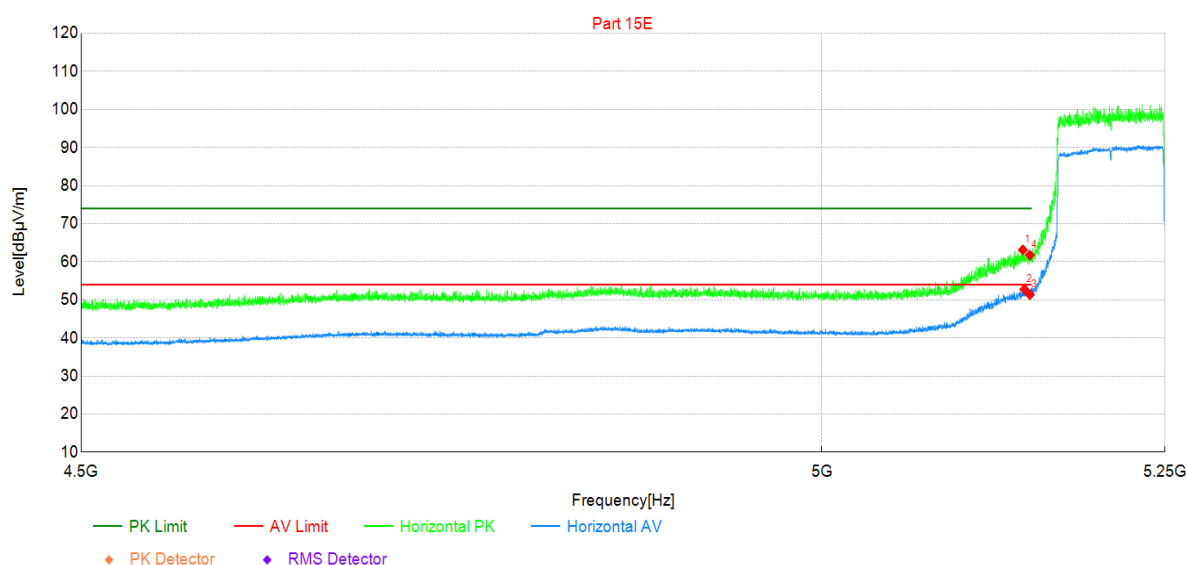

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5145            | 48.06          | 63.14          | 15.08         | 74.00          | 10.86       | PK  | Horizo | PASS    |
| 2  | 5146            | 37.69          | 52.78          | 15.09         | 54.00          | 1.22        | AV  | Horizo | PASS    |
| 3  | 5150            | 36.25          | 51.36          | 15.11         | 54.00          | 2.64        | AV  | Horizo | PASS    |
| 4  | 5150            | 46.65          | 61.76          | 15.11         | 74.00          | 12.24       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 10: Transmit at 5210MHz by 802.11ax(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                           | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

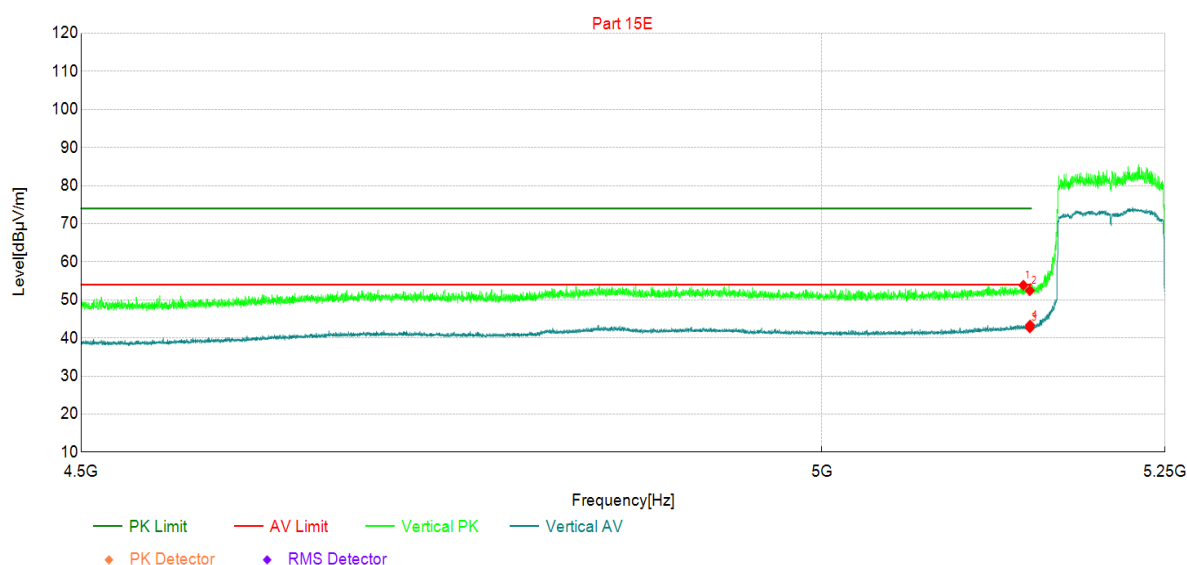


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5145            | 38.76          | 53.84          | 15.08         | 74.00          | 20.16       | PK  | Vertic | PASS    |
| 2  | 5150            | 37.32          | 52.43          | 15.11         | 74.00          | 21.57       | PK  | Vertic | PASS    |
| 3  | 5150            | 27.52          | 42.63          | 15.11         | 54.00          | 11.37       | AV  | Vertic | PASS    |
| 4  | 5150            | 28.29          | 43.40          | 15.11         | 54.00          | 10.60       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

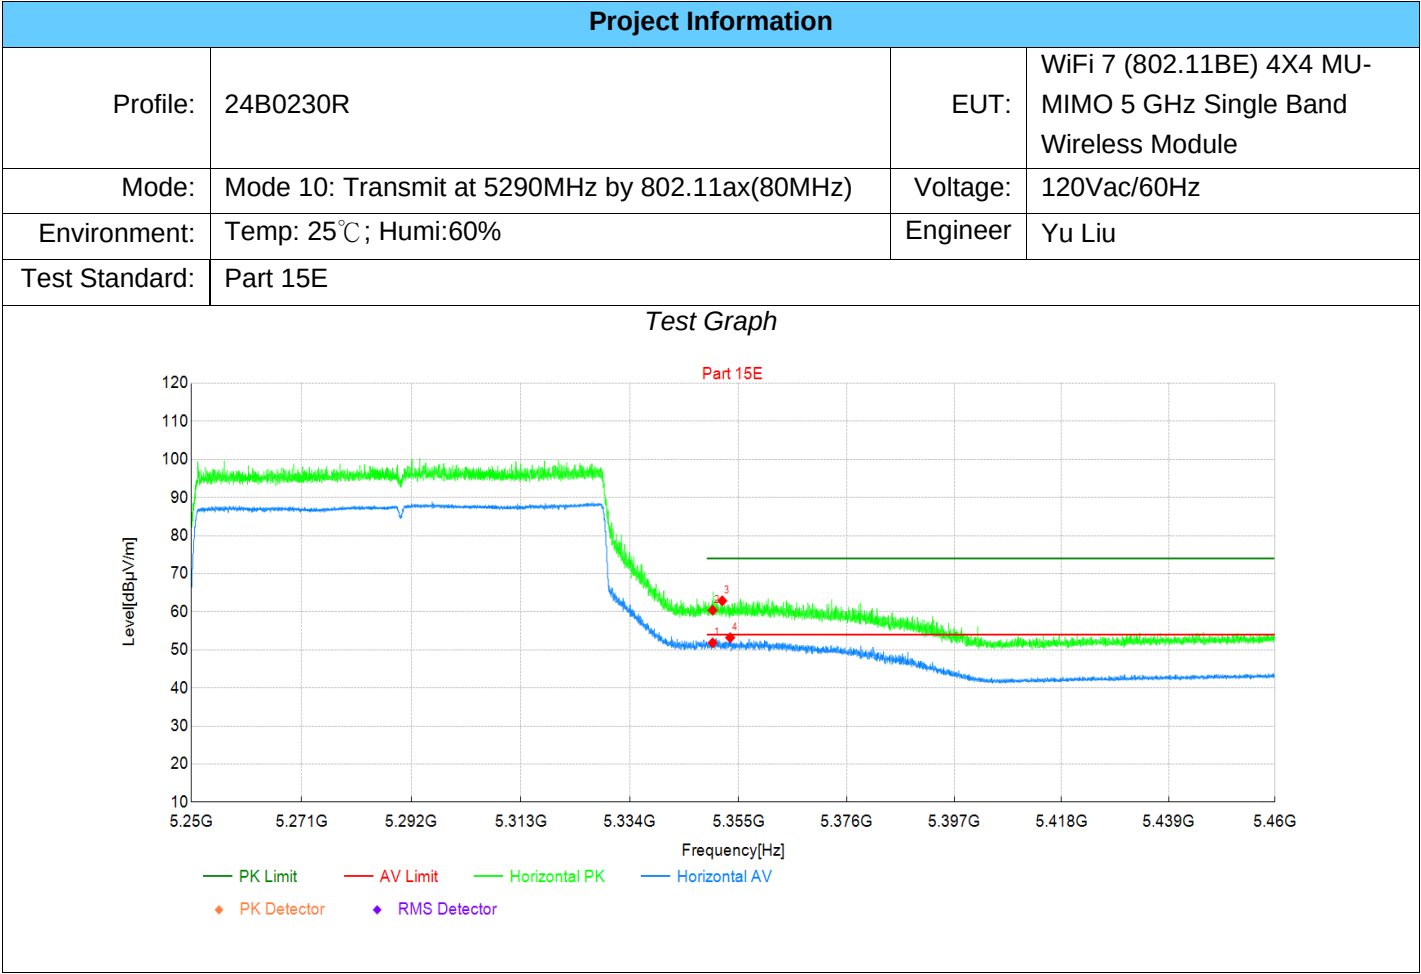

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 36.13          | 51.84          | 15.71         | 54.00          | 2.16        | AV  | Horizo | PASS    |
| 2                   | 5350            | 44.71          | 60.42          | 15.71         | 74.00          | 13.58       | PK  | Horizo | PASS    |
| 3                   | 5352            | 47.18          | 62.89          | 15.71         | 74.00          | 11.11       | PK  | Horizo | PASS    |
| 4                   | 5353            | 37.48          | 53.19          | 15.71         | 54.00          | 0.81        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

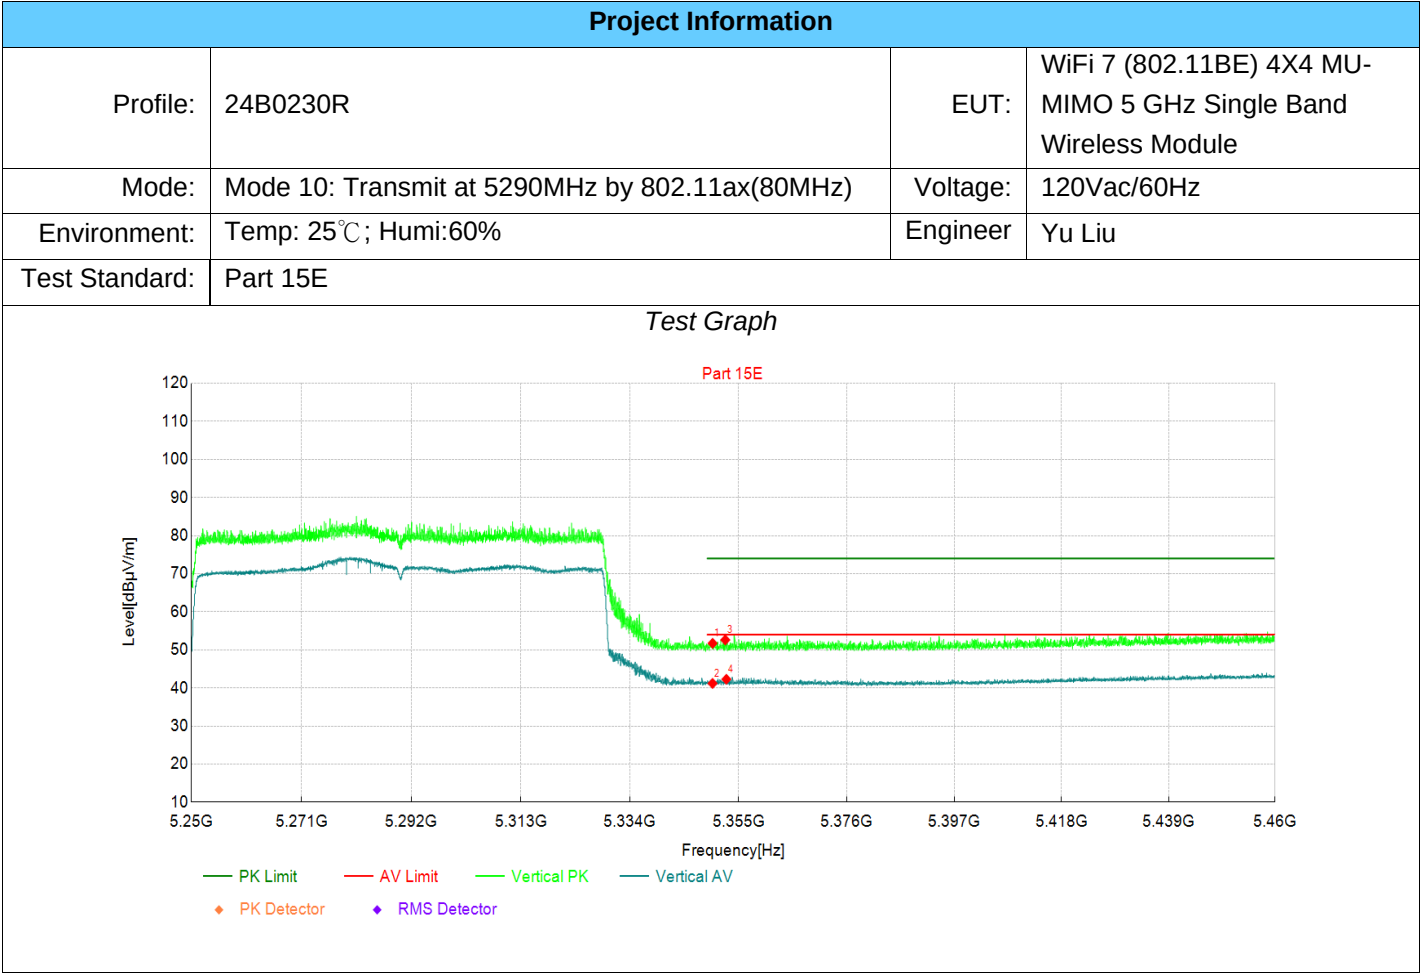

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 36.01          | 51.72          | 15.71         | 74.00          | 22.28       | PK  | Vertic | PASS    |
| 2                   | 5350            | 25.48          | 41.19          | 15.71         | 54.00          | 12.81       | AV  | Vertic | PASS    |
| 3                   | 5352            | 36.90          | 52.61          | 15.71         | 74.00          | 21.39       | PK  | Vertic | PASS    |
| 4                   | 5353            | 26.57          | 42.28          | 15.71         | 54.00          | 11.72       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

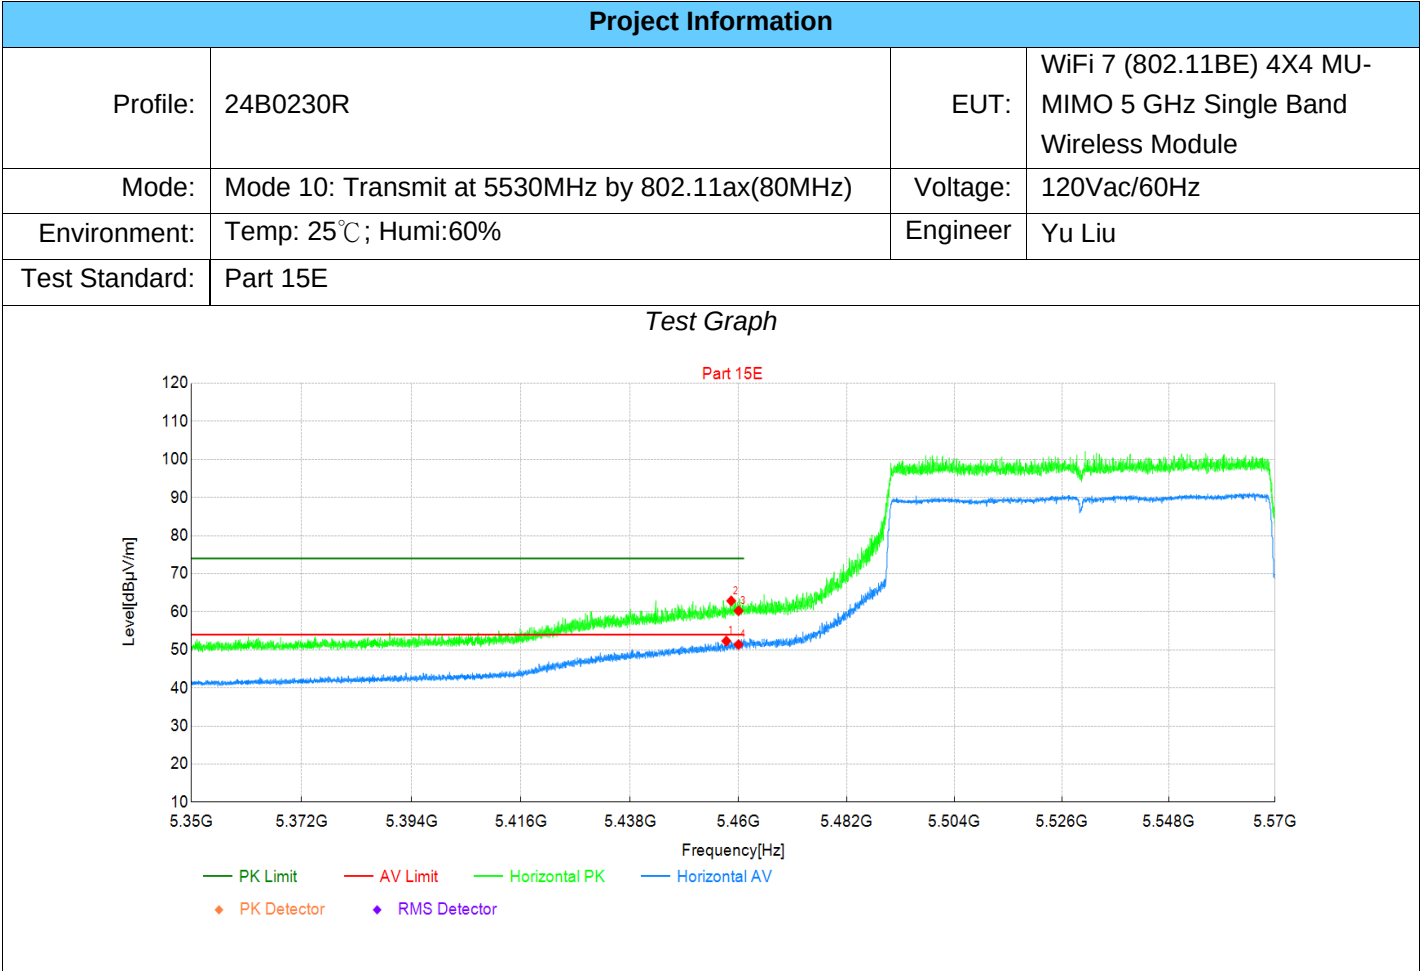

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 36.00          | 52.31          | 16.31         | 54.00          | 1.69        | AV  | Horizo | PASS    |
| 2                   | 5459            | 46.54          | 62.86          | 16.32         | 74.00          | 11.14       | PK  | Horizo | PASS    |
| 3                   | 5460            | 43.91          | 60.25          | 16.34         | 74.00          | 13.75       | PK  | Horizo | PASS    |
| 4                   | 5460            | 35.06          | 51.40          | 16.34         | 54.00          | 2.60        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

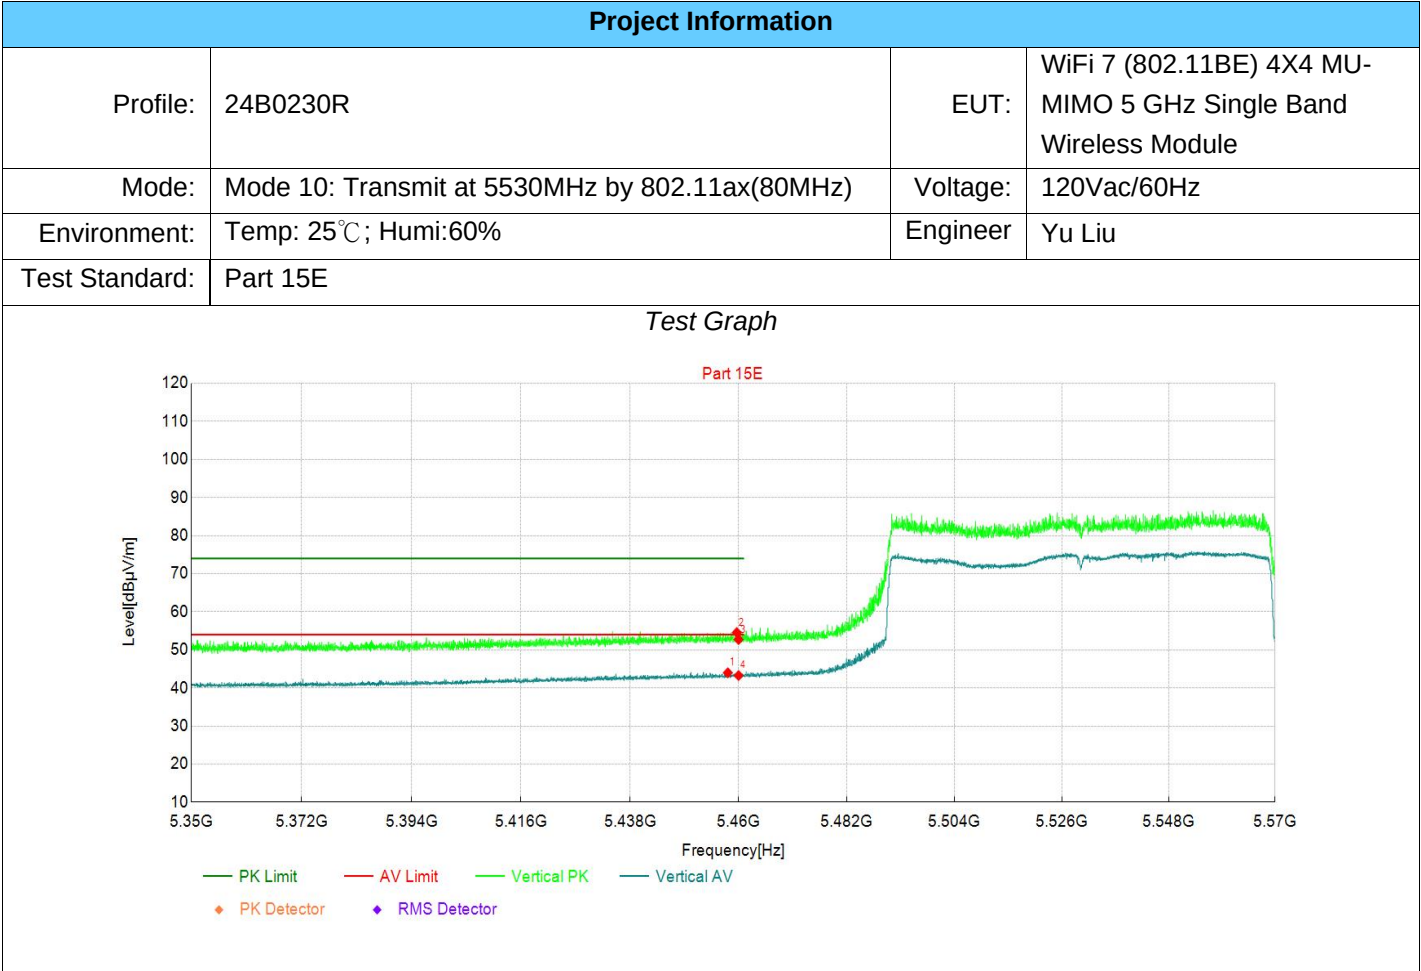

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 27.67          | 43.98          | 16.31         | 54.00          | 10.02       | AV  | Vertic | PASS    |
| 2                   | 5460            | 38.22          | 54.56          | 16.34         | 74.00          | 19.44       | PK  | Vertic | PASS    |
| 3                   | 5460            | 36.37          | 52.71          | 16.34         | 74.00          | 21.29       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.93          | 43.27          | 16.34         | 54.00          | 10.73       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

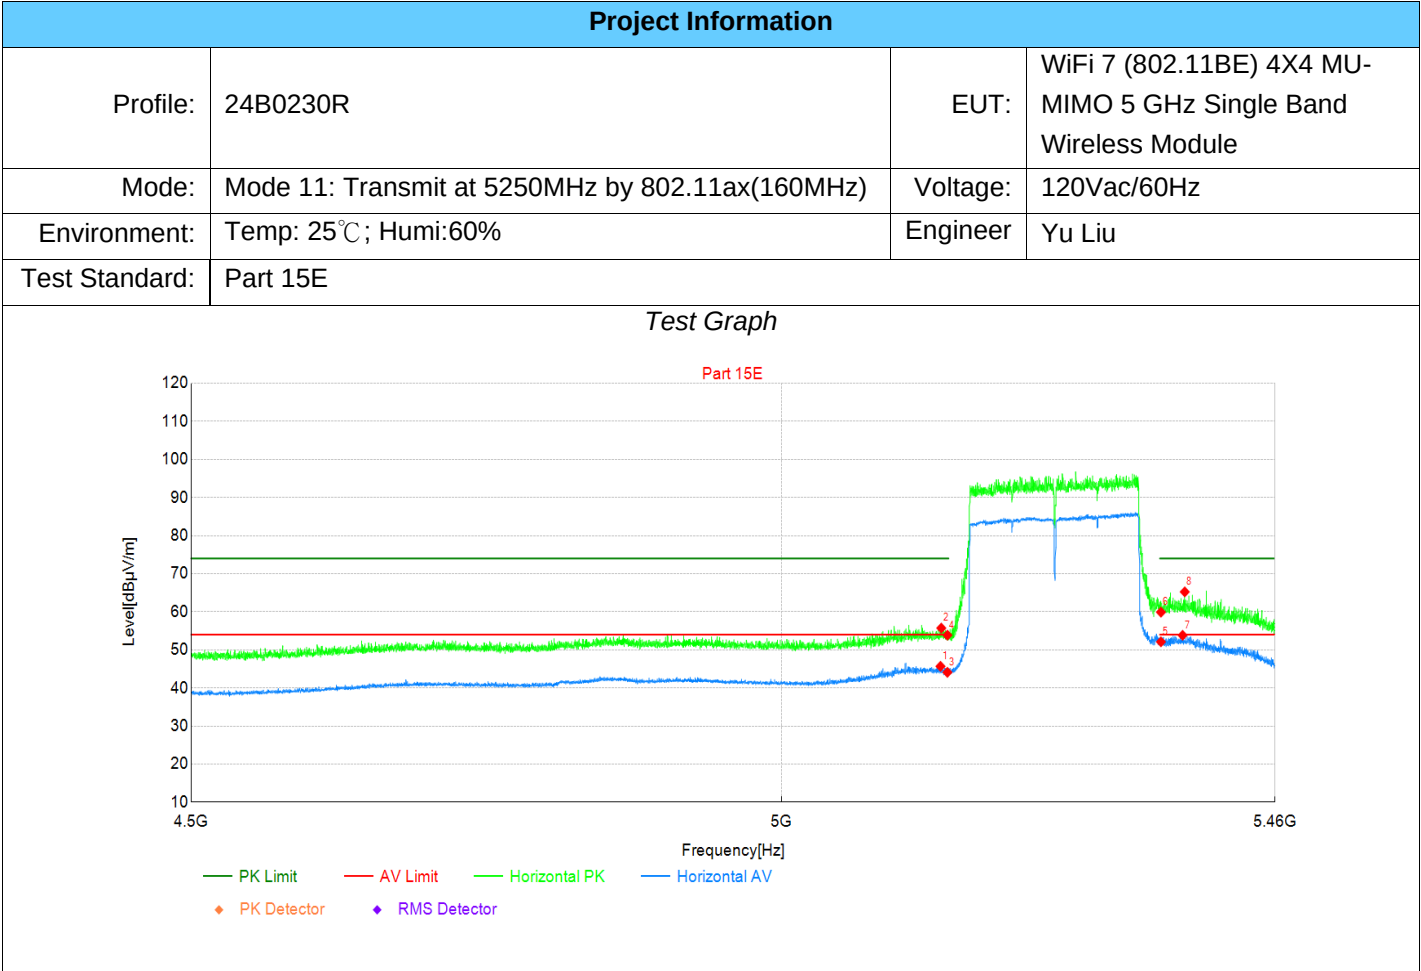

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5144            | 30.60          | 45.67          | 15.07         | 54.00          | 8.33        | AV  | Horizo | PASS    |
| 2                   | 5144            | 40.64          | 55.72          | 15.08         | 74.00          | 18.28       | PK  | Horizo | PASS    |
| 3                   | 5150            | 28.99          | 44.10          | 15.11         | 54.00          | 9.90        | AV  | Horizo | PASS    |
| 4                   | 5150            | 38.75          | 53.86          | 15.11         | 74.00          | 20.14       | PK  | Horizo | PASS    |
| 5                   | 5350            | 36.40          | 52.11          | 15.71         | 54.00          | 1.89        | AV  | Horizo | PASS    |
| 6                   | 5350            | 44.20          | 59.91          | 15.71         | 74.00          | 14.09       | PK  | Horizo | PASS    |
| 7                   | 5371            | 38.14          | 53.82          | 15.68         | 54.00          | 0.18        | AV  | Horizo | PASS    |
| 8                   | 5373            | 49.56          | 65.24          | 15.68         | 74.00          | 8.76        | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                  |          |                                                                 |
|----------------|--------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                         | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 11: Transmit at 5250MHz by 802.11ax(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25°C ; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                         |          |                                                                 |

### Test Graph

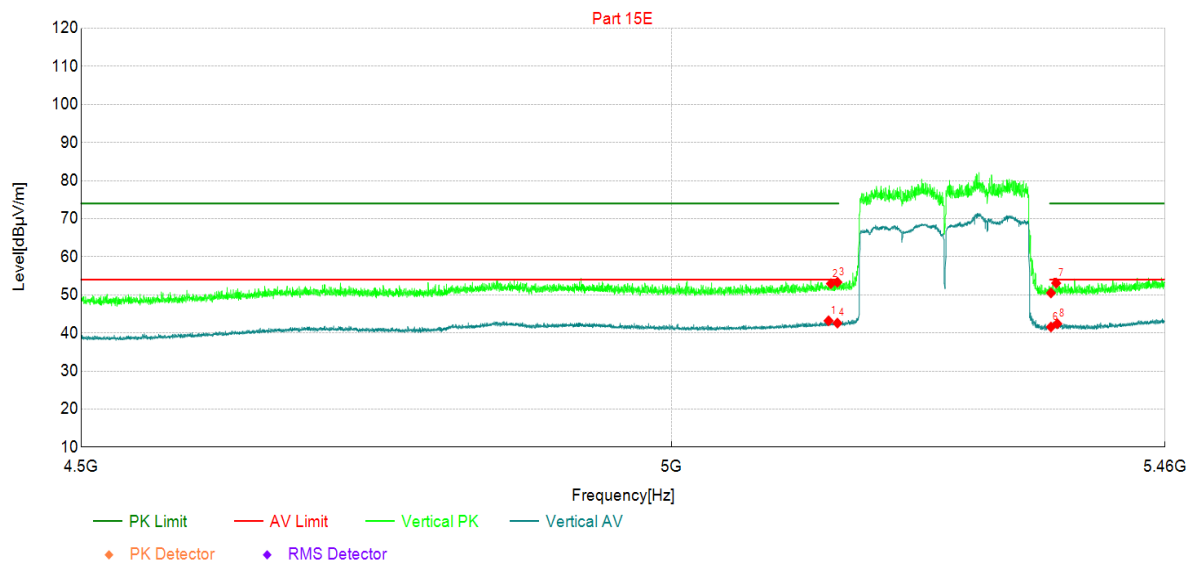


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5142            | 28.13          | 43.19          | 15.06         | 54.00          | 10.81       | AV  | Vertic | PASS    |
| 2  | 5144            | 37.87          | 52.95          | 15.08         | 74.00          | 21.05       | PK  | Vertic | PASS    |
| 3  | 5150            | 38.20          | 53.31          | 15.11         | 74.00          | 20.69       | PK  | Vertic | PASS    |
| 4  | 5150            | 27.47          | 42.58          | 15.11         | 54.00          | 11.42       | AV  | Vertic | PASS    |
| 5  | 5350            | 34.78          | 50.49          | 15.71         | 74.00          | 23.51       | PK  | Vertic | PASS    |
| 6  | 5350            | 25.85          | 41.56          | 15.71         | 54.00          | 12.44       | AV  | Vertic | PASS    |
| 7  | 5355            | 37.38          | 53.08          | 15.70         | 74.00          | 20.92       | PK  | Vertic | PASS    |
| 8  | 5356            | 26.71          | 42.41          | 15.70         | 54.00          | 11.59       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

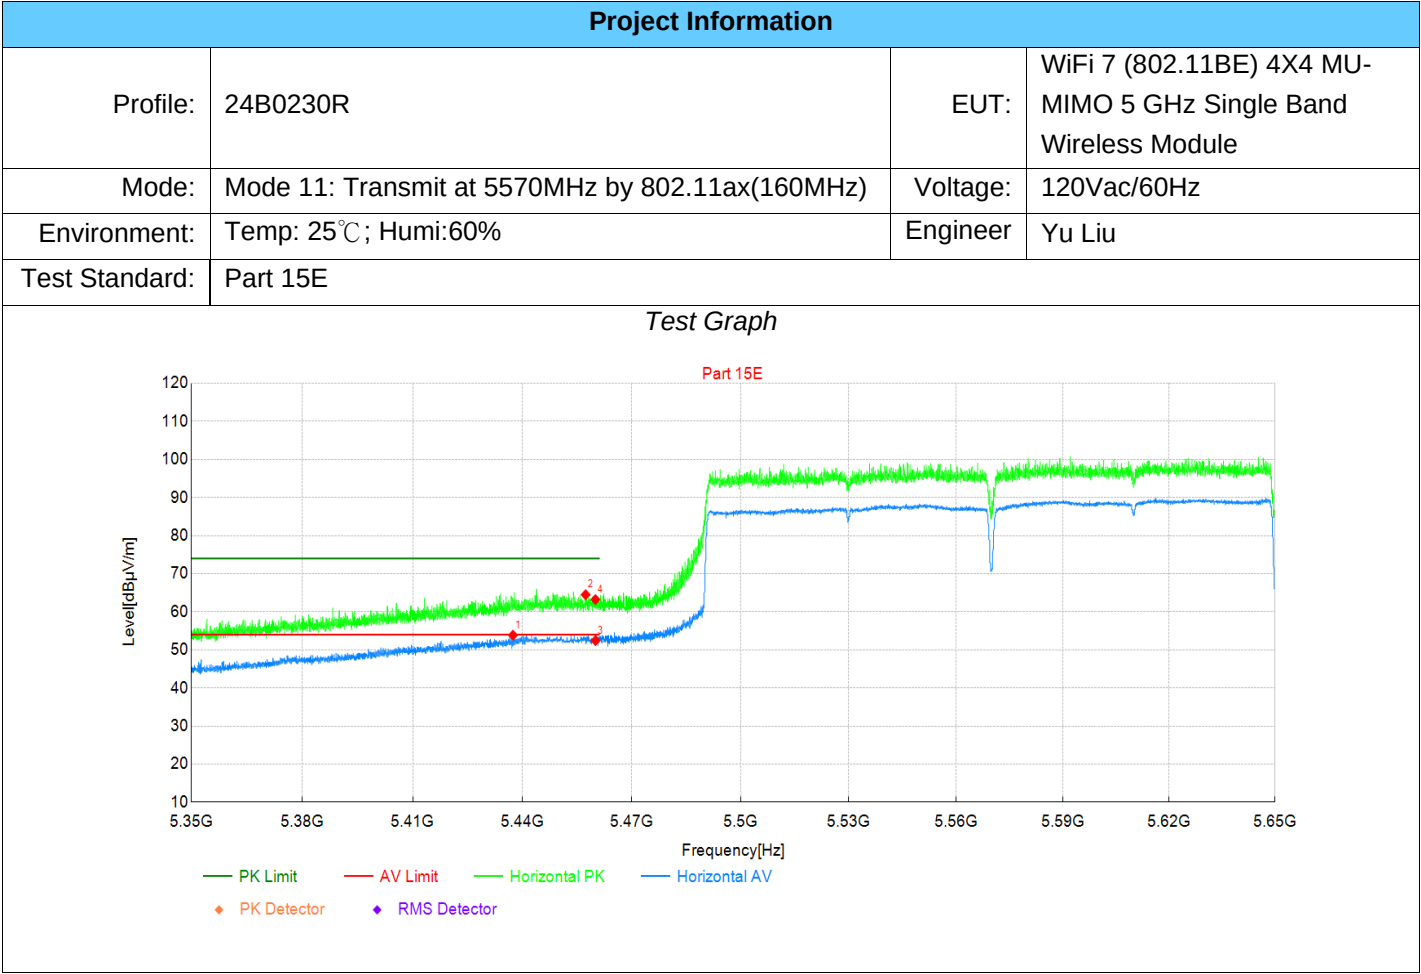

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5437            | 37.78          | 53.86          | 16.08         | 54.00          | 0.14        | AV  | Horizo | PASS    |
| 2                   | 5457            | 48.18          | 64.49          | 16.31         | 74.00          | 9.51        | PK  | Horizo | PASS    |
| 3                   | 5460            | 36.12          | 52.46          | 16.34         | 54.00          | 1.54        | AV  | Horizo | PASS    |
| 4                   | 5460            | 46.86          | 63.20          | 16.34         | 74.00          | 10.80       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                  |          |                                                                 |
|----------------|--------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                         | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 11: Transmit at 5570MHz by 802.11ax(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                              | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                         |          |                                                                 |

### Test Graph

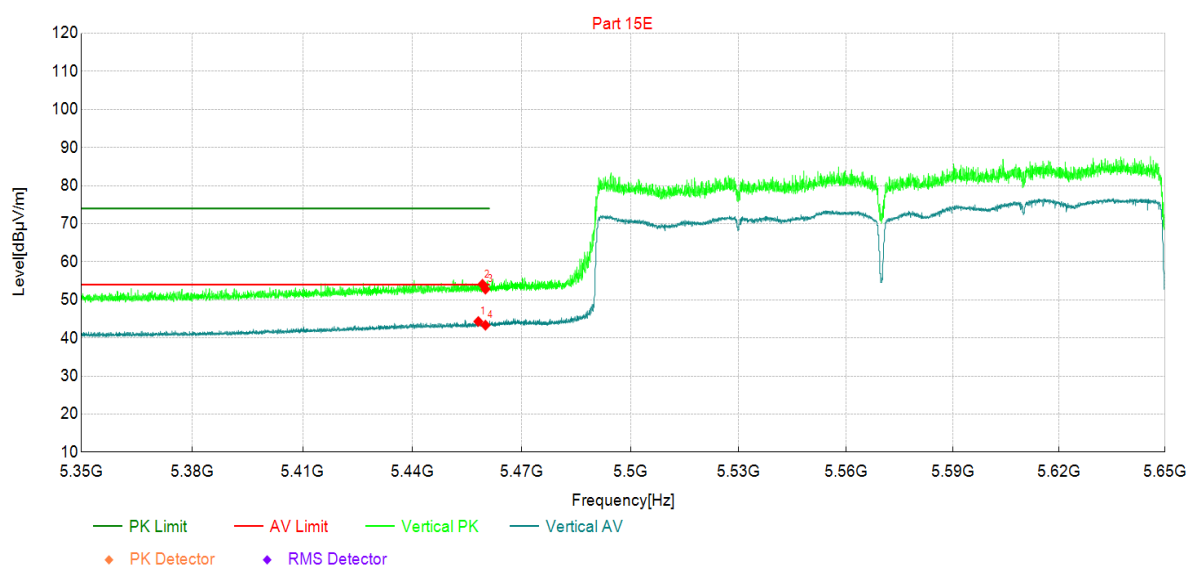


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5458            | 28.00          | 44.31          | 16.31         | 54.00          | 9.69        | AV  | Vertic | PASS    |
| 2  | 5459            | 37.76          | 54.09          | 16.33         | 74.00          | 19.91       | PK  | Vertic | PASS    |
| 3  | 5460            | 36.47          | 52.81          | 16.34         | 74.00          | 21.19       | PK  | Vertic | PASS    |
| 4  | 5460            | 27.01          | 43.35          | 16.34         | 54.00          | 10.65       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

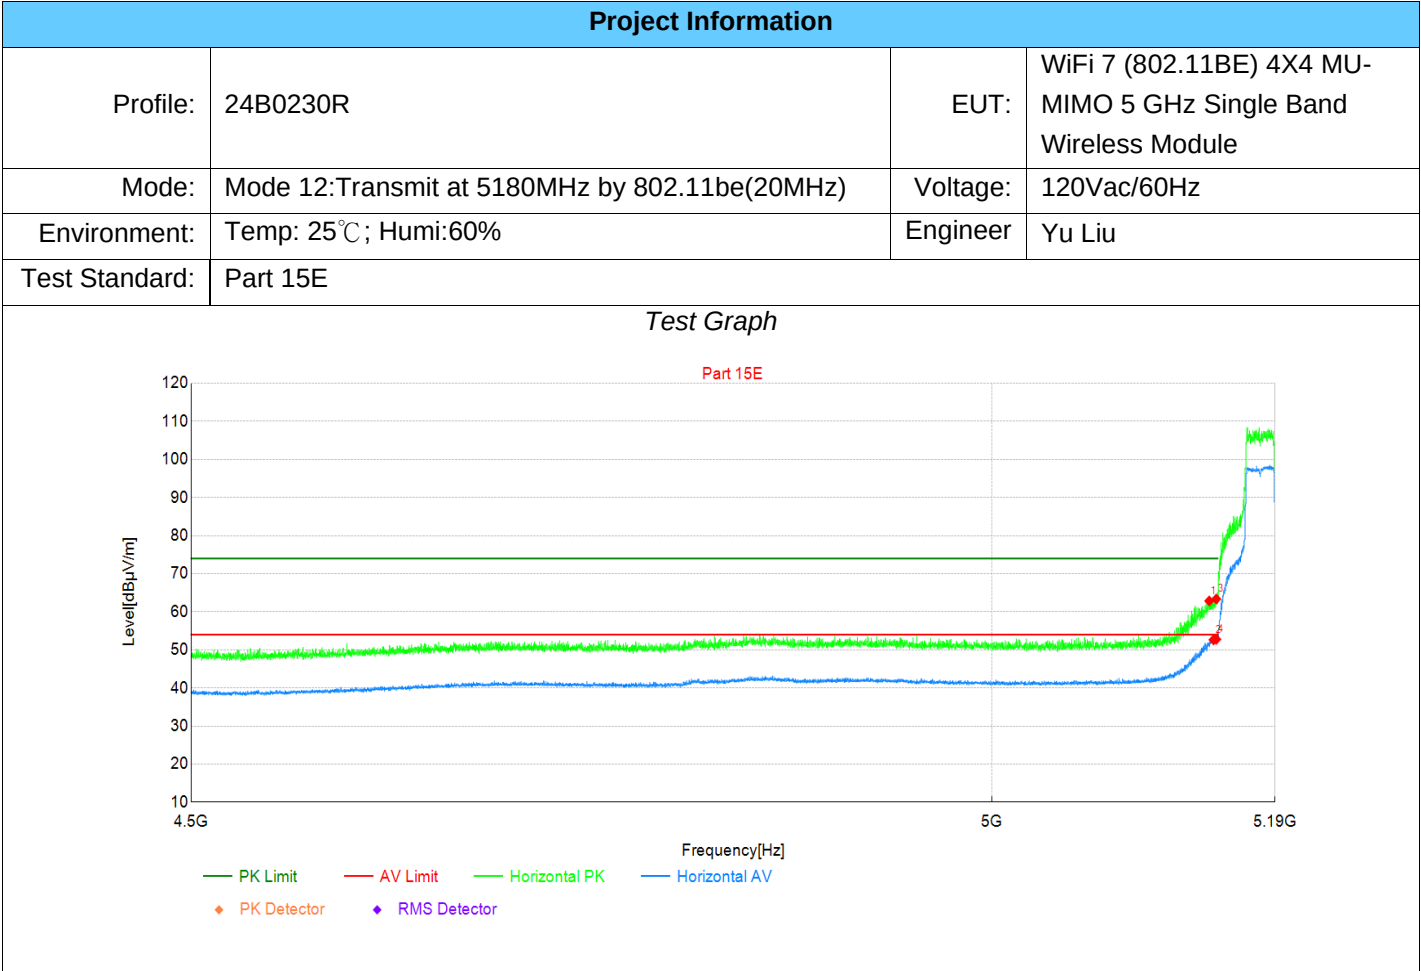

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5145            | 47.77          | 62.85          | 15.08         | 74.00          | 11.15       | PK  | Horizo | PASS    |
| 2                   | 5148            | 37.54          | 52.64          | 15.10         | 54.00          | 1.36        | AV  | Horizo | PASS    |
| 3                   | 5150            | 48.25          | 63.36          | 15.11         | 74.00          | 10.64       | PK  | Horizo | PASS    |
| 4                   | 5150            | 37.66          | 52.77          | 15.11         | 54.00          | 1.23        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

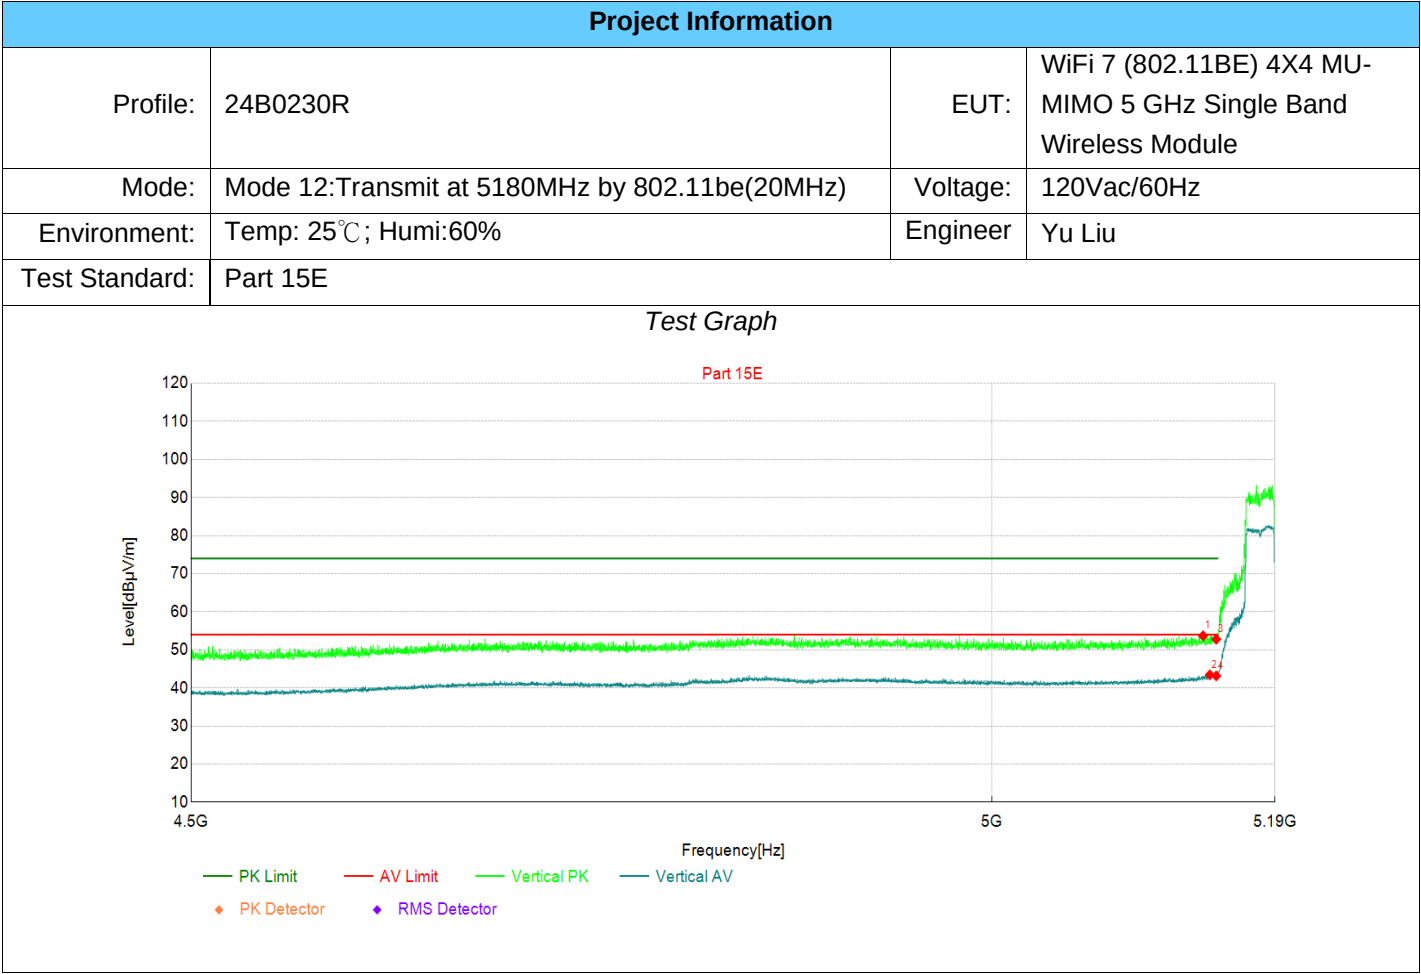

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5141            | 38.64          | 53.70          | 15.06         | 74.00          | 20.30       | PK  | Vertic | PASS    |
| 2                   | 5146            | 28.36          | 43.44          | 15.08         | 54.00          | 10.56       | AV  | Vertic | PASS    |
| 3                   | 5150            | 37.69          | 52.80          | 15.11         | 74.00          | 21.20       | PK  | Vertic | PASS    |
| 4                   | 5150            | 28.05          | 43.16          | 15.11         | 54.00          | 10.84       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

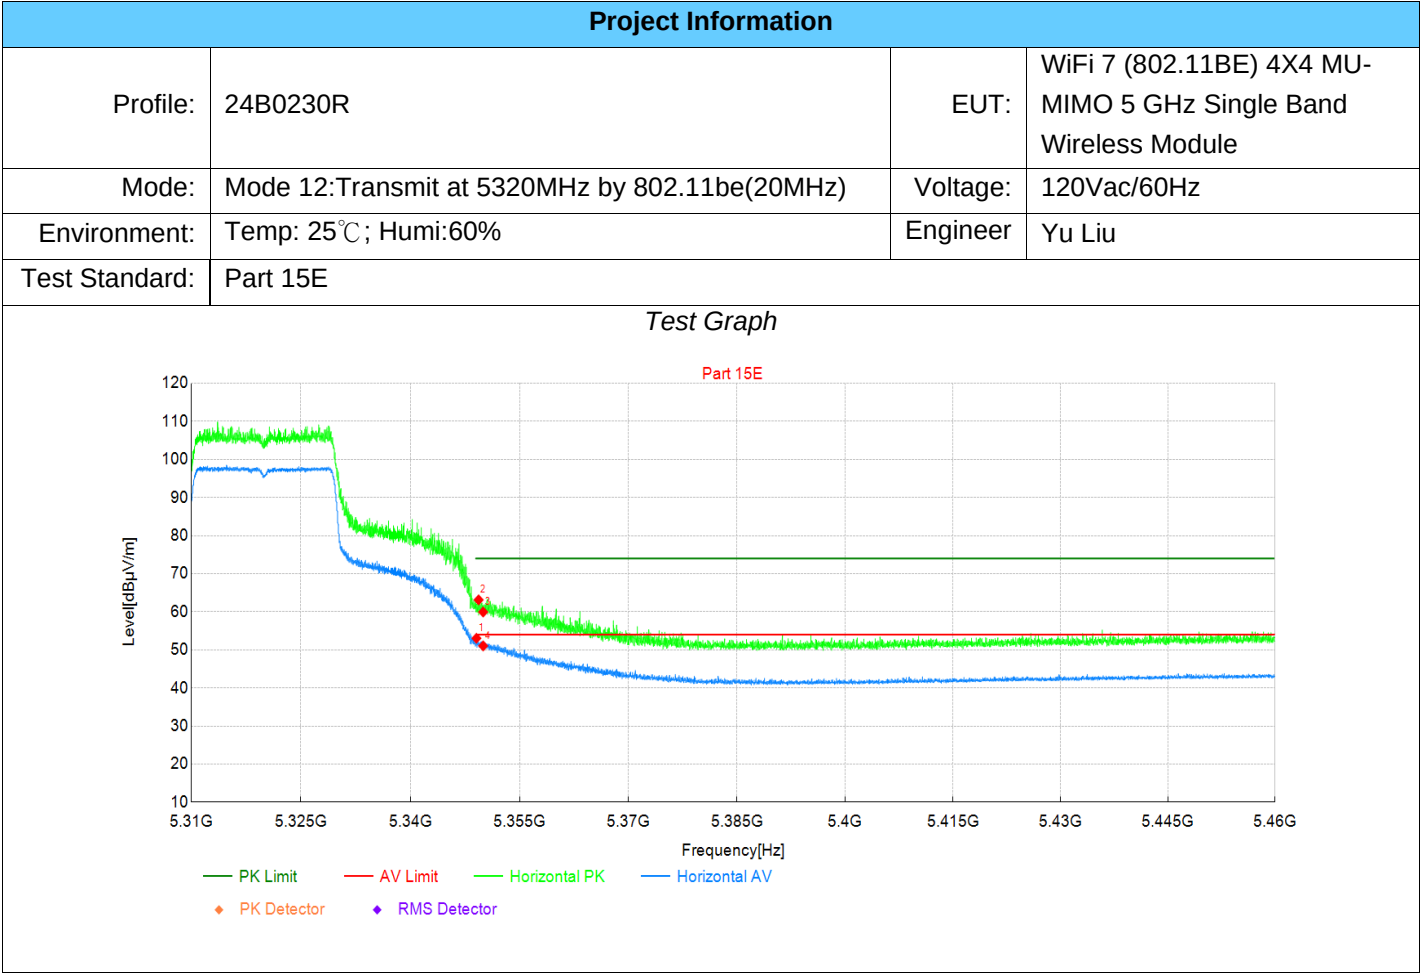

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5349            | 37.33          | 53.04          | 15.71         | 54.00          | 0.96        | AV  | Horizo | PASS    |
| 2                   | 5349            | 47.42          | 63.13          | 15.71         | 74.00          | 10.87       | PK  | Horizo | PASS    |
| 3                   | 5350            | 44.24          | 59.95          | 15.71         | 74.00          | 14.05       | PK  | Horizo | PASS    |
| 4                   | 5350            | 35.33          | 51.04          | 15.71         | 54.00          | 2.96        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 12:Transmit at 5320MHz by 802.11be(20MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

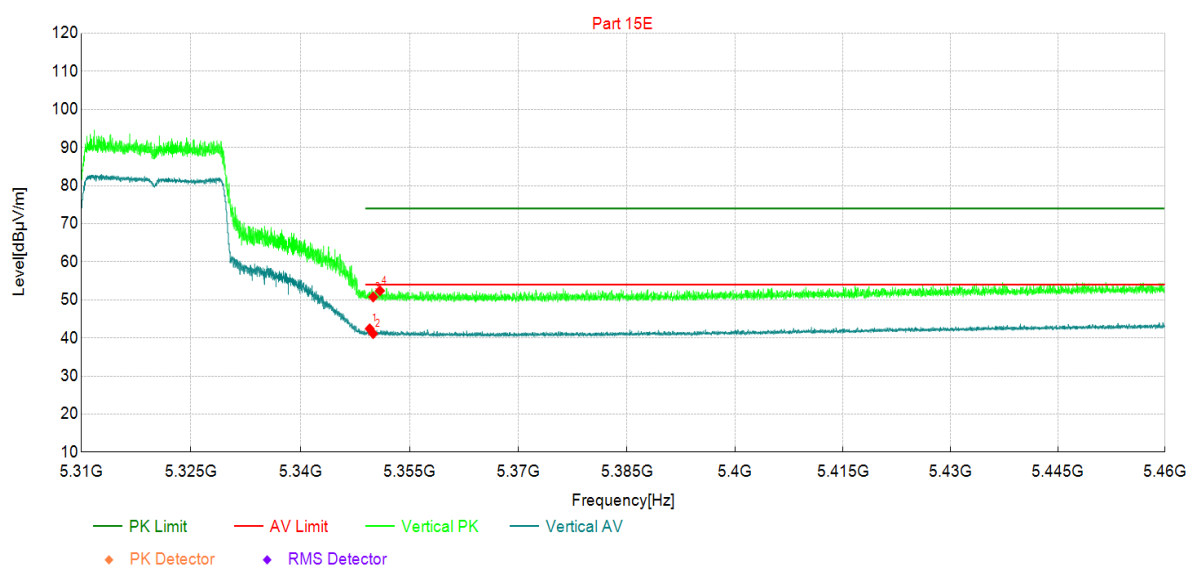


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5350            | 26.70          | 42.41          | 15.71         | 54.00          | 11.59       | AV  | Vertic | PASS    |
| 2  | 5350            | 25.41          | 41.12          | 15.71         | 54.00          | 12.88       | AV  | Vertic | PASS    |
| 3  | 5350            | 35.05          | 50.76          | 15.71         | 74.00          | 23.24       | PK  | Vertic | PASS    |
| 4  | 5351            | 36.67          | 52.38          | 15.71         | 74.00          | 21.62       | PK  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

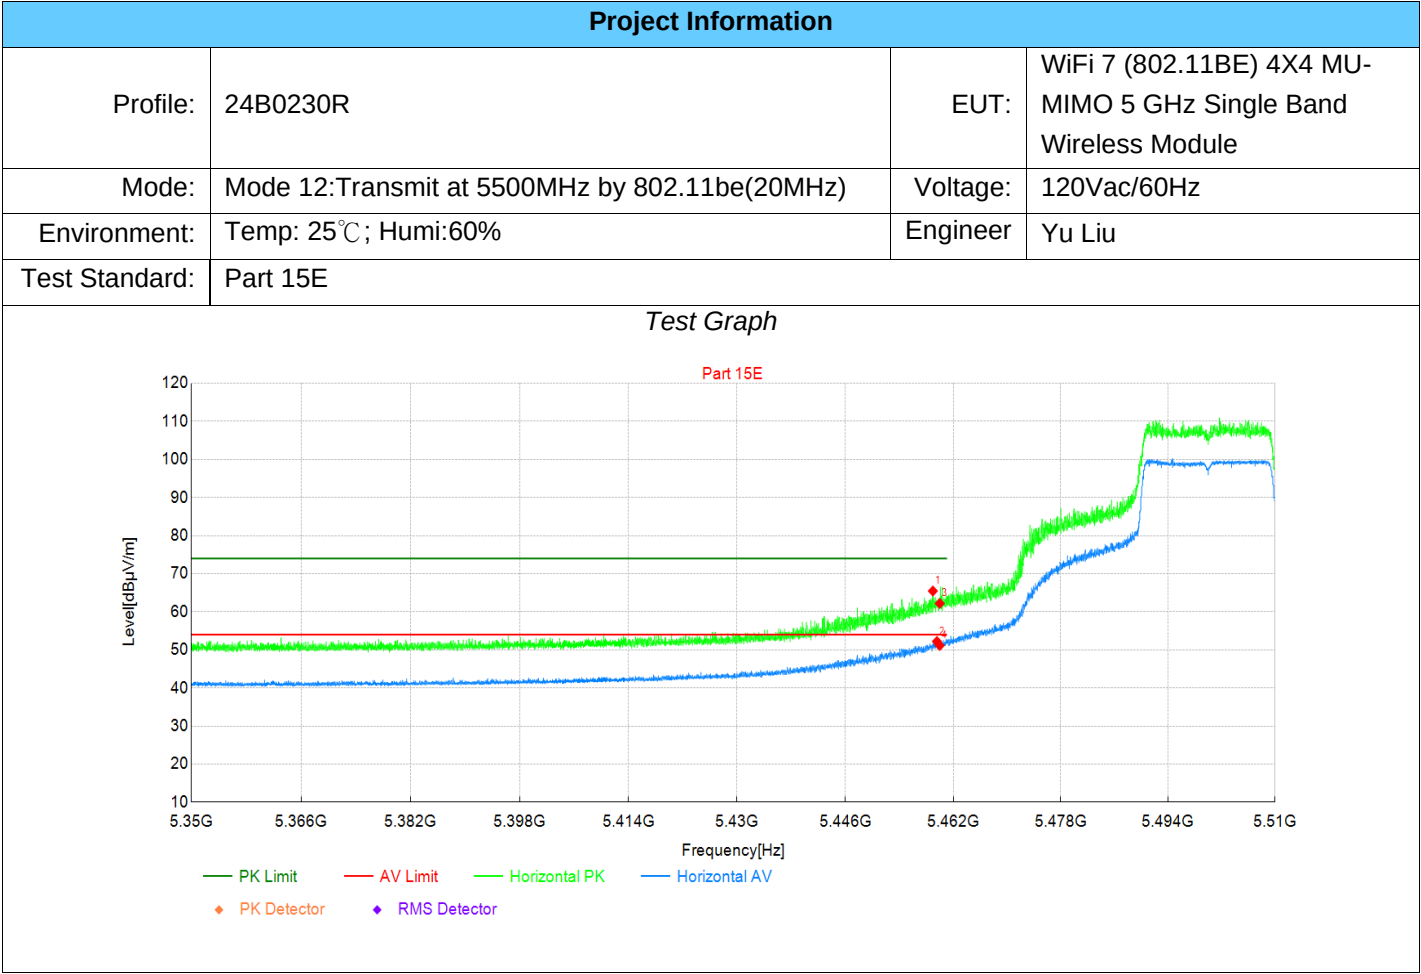

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 49.14          | 65.47          | 16.33         | 74.00          | 8.53        | PK  | Horizo | PASS    |
| 2                   | 5460            | 35.87          | 52.21          | 16.34         | 54.00          | 1.79        | AV  | Horizo | PASS    |
| 3                   | 5460            | 45.85          | 62.19          | 16.34         | 74.00          | 11.81       | PK  | Horizo | PASS    |
| 4                   | 5460            | 34.81          | 51.15          | 16.34         | 54.00          | 2.85        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

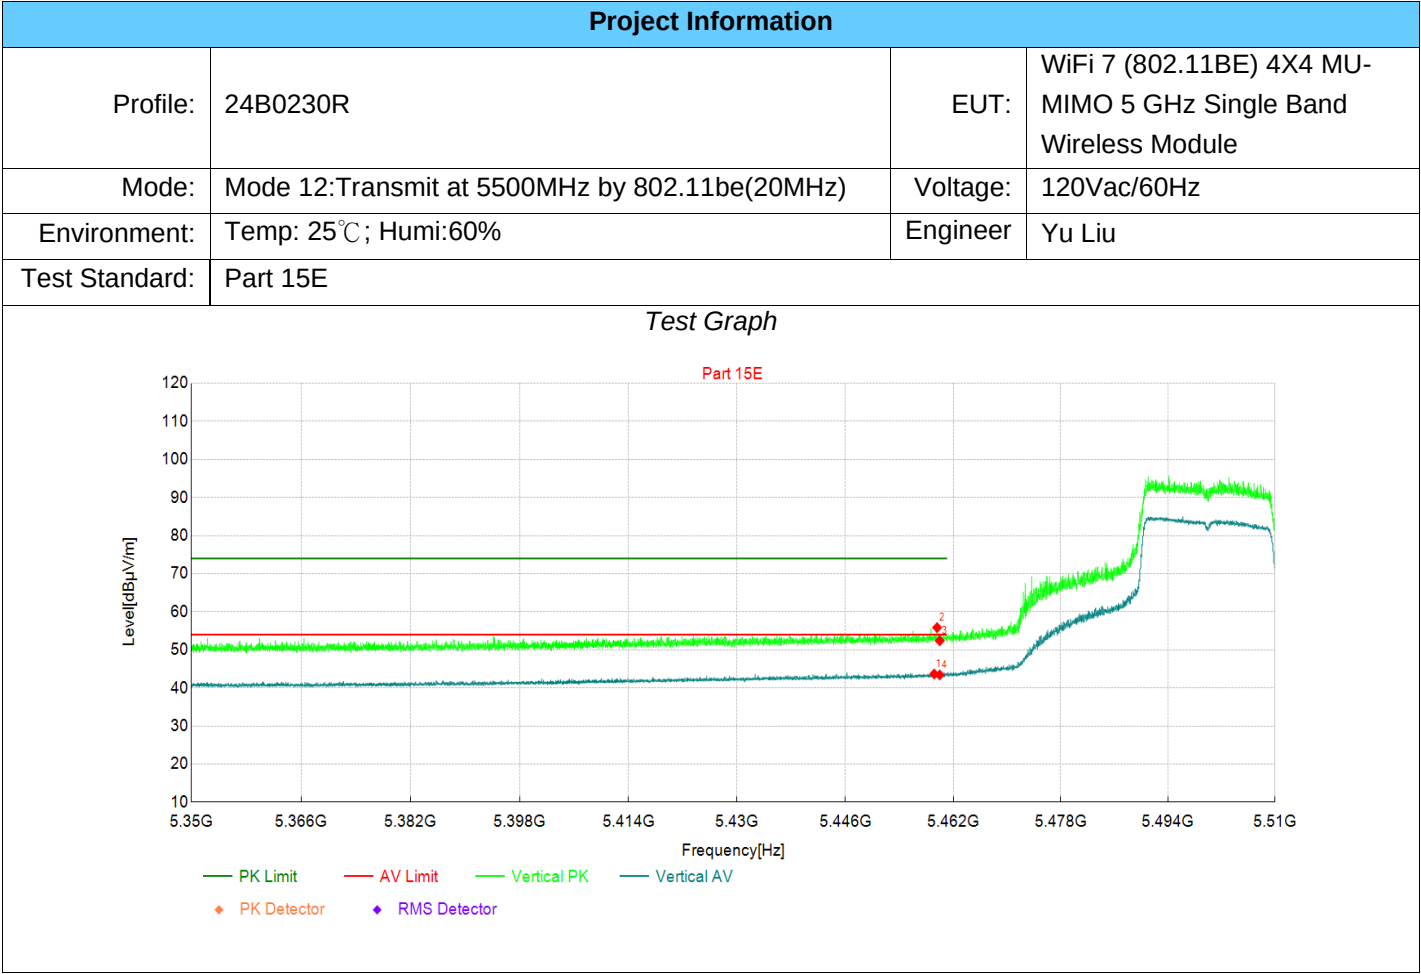

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5459            | 27.33          | 43.66          | 16.33         | 54.00          | 10.34       | AV  | Vertic | PASS    |
| 2                   | 5460            | 39.52          | 55.86          | 16.34         | 74.00          | 18.14       | PK  | Vertic | PASS    |
| 3                   | 5460            | 36.06          | 52.40          | 16.34         | 74.00          | 21.60       | PK  | Vertic | PASS    |
| 4                   | 5460            | 27.08          | 43.42          | 16.34         | 54.00          | 10.58       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

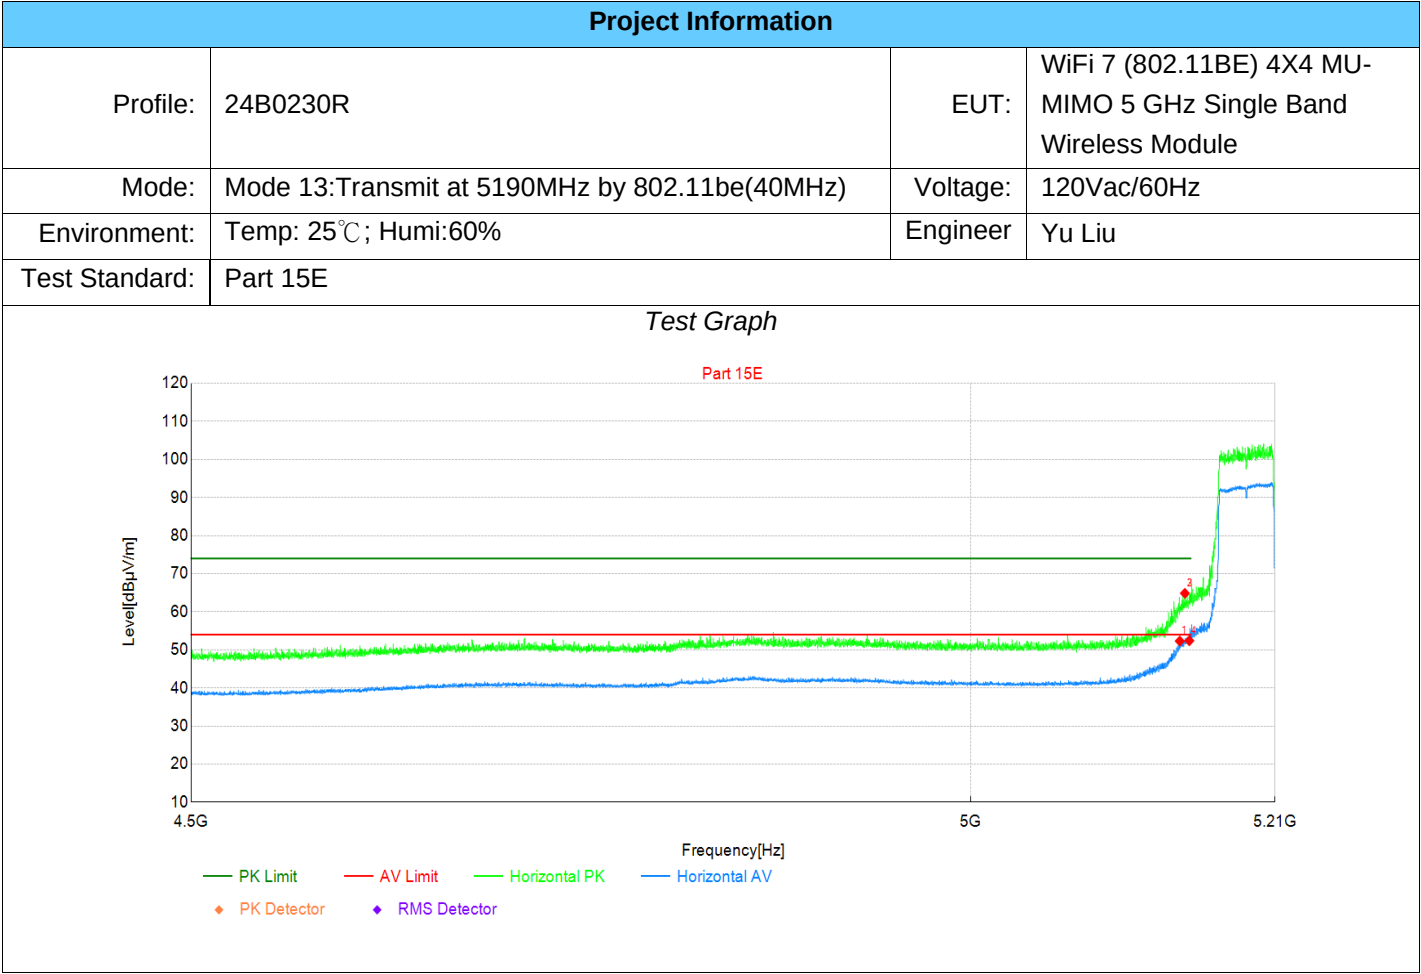

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5143            | 37.24          | 52.31          | 15.07         | 54.00          | 1.69        | AV  | Horizo | PASS    |
| 2                   | 5147            | 49.76          | 64.85          | 15.09         | 74.00          | 9.15        | PK  | Horizo | PASS    |
| 3                   | 5147            | 49.76          | 64.85          | 15.09         | 74.00          | 9.15        | PK  | Horizo | PASS    |
| 4                   | 5150            | 37.29          | 52.40          | 15.11         | 54.00          | 1.60        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 13:Transmit at 5190MHz by 802.11be(40MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

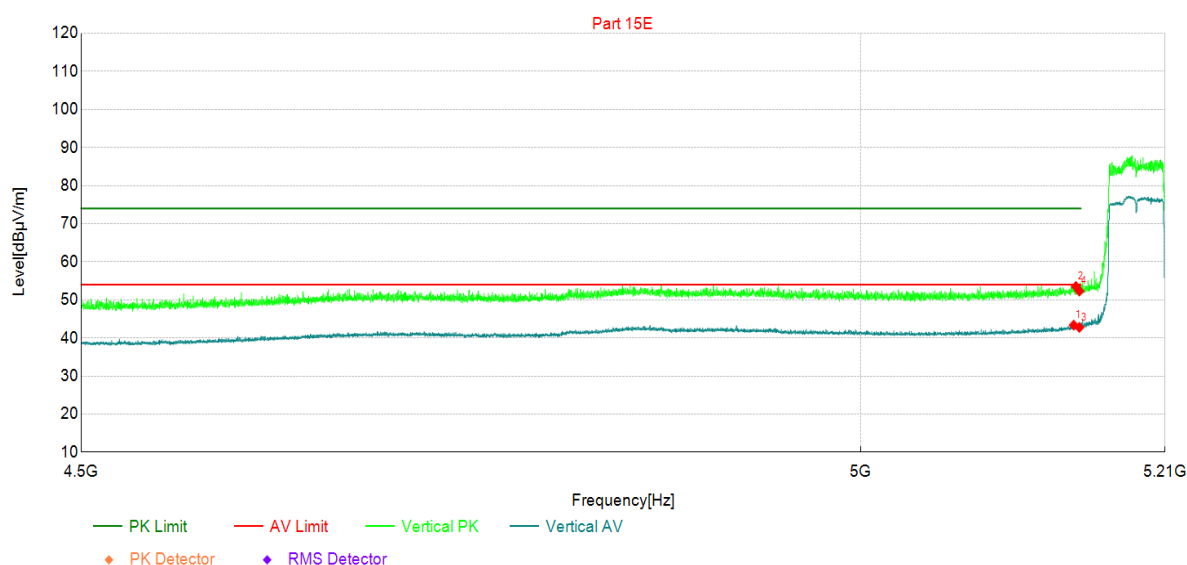


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5146            | 28.27          | 43.36          | 15.09         | 54.00          | 10.64       | AV  | Vertic | PASS    |
| 2  | 5148            | 38.41          | 53.51          | 15.10         | 74.00          | 20.49       | PK  | Vertic | PASS    |
| 3  | 5150            | 27.66          | 42.77          | 15.11         | 54.00          | 11.23       | AV  | Vertic | PASS    |
| 4  | 5150            | 37.20          | 52.31          | 15.11         | 74.00          | 21.69       | PK  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

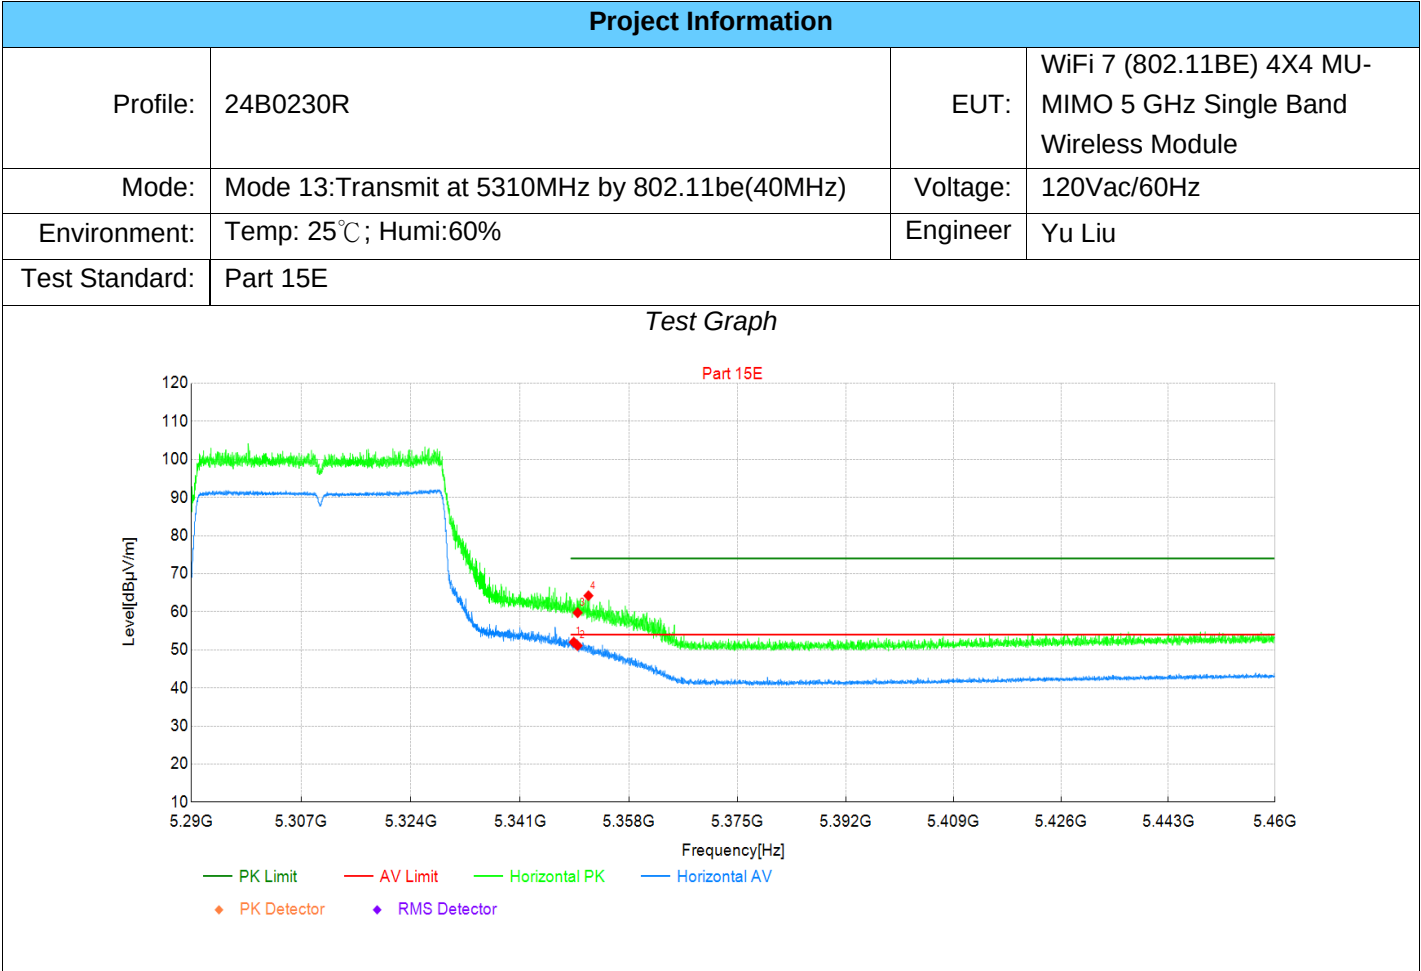

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5349            | 36.32          | 52.03          | 15.71         | 54.00          | 1.97        | AV  | Horizo | PASS    |
| 2                   | 5350            | 35.40          | 51.11          | 15.71         | 54.00          | 2.89        | AV  | Horizo | PASS    |
| 3                   | 5350            | 44.04          | 59.75          | 15.71         | 74.00          | 14.25       | PK  | Horizo | PASS    |
| 4                   | 5352            | 48.52          | 64.23          | 15.71         | 74.00          | 9.77        | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

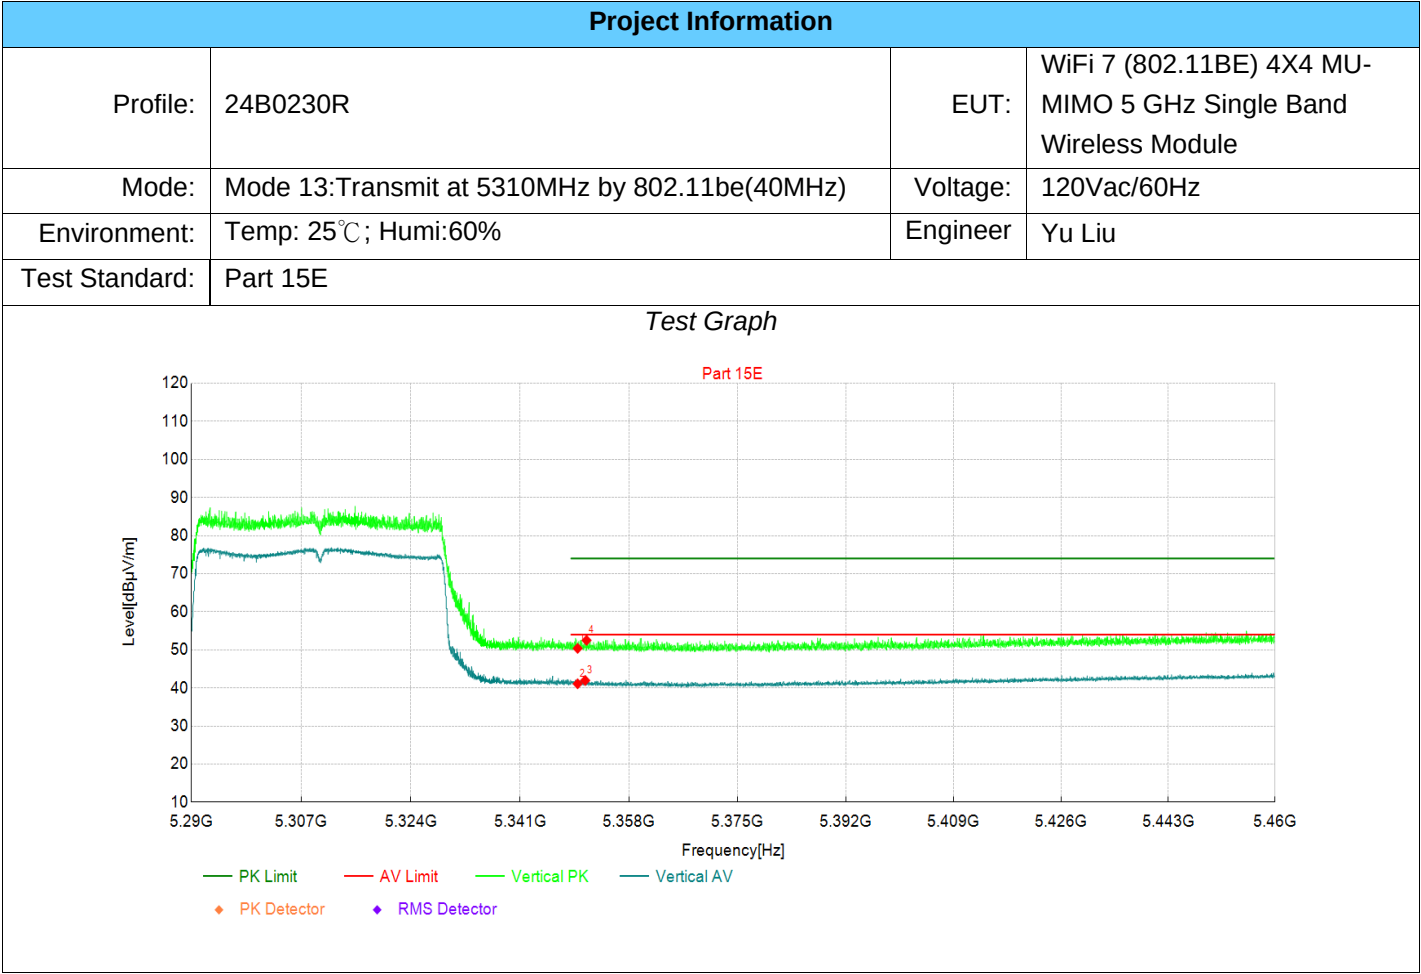

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 34.68          | 50.39          | 15.71         | 74.00          | 23.61       | PK  | Vertic | PASS    |
| 2                   | 5350            | 25.38          | 41.09          | 15.71         | 54.00          | 12.91       | AV  | Vertic | PASS    |
| 3                   | 5351            | 26.25          | 41.96          | 15.71         | 54.00          | 12.04       | AV  | Vertic | PASS    |
| 4                   | 5351            | 36.80          | 52.51          | 15.71         | 74.00          | 21.49       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 13:Transmit at 5510MHz by 802.11be(40MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

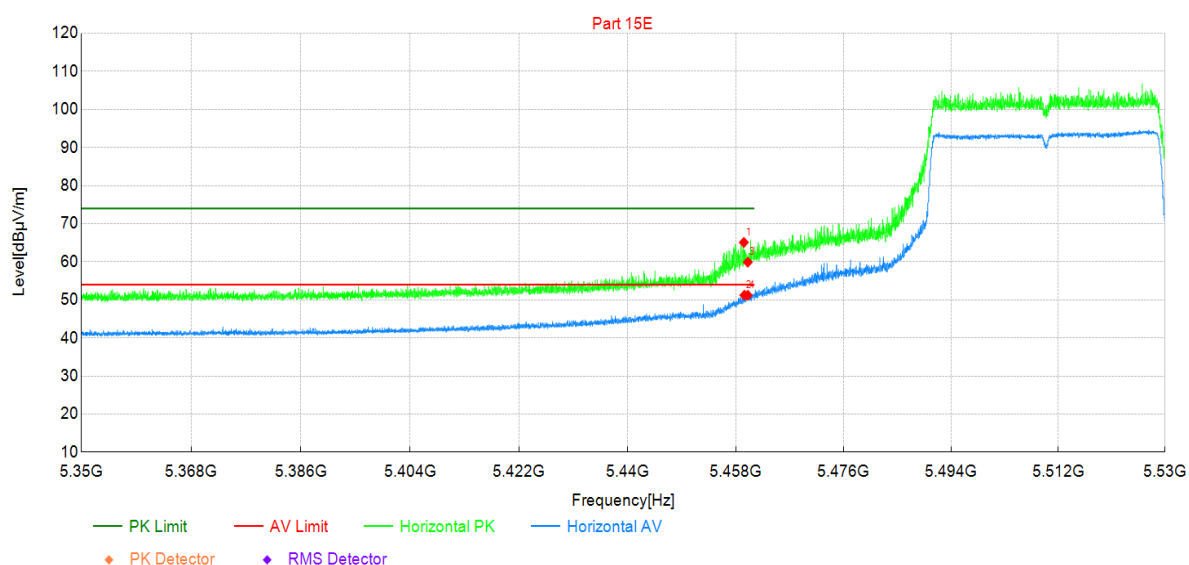


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5459            | 48.75          | 65.09          | 16.34         | 74.00          | 8.91        | PK  | Horizo | PASS    |
| 2  | 5459            | 34.88          | 51.22          | 16.34         | 54.00          | 2.78        | AV  | Horizo | PASS    |
| 3  | 5460            | 43.56          | 59.90          | 16.34         | 74.00          | 14.10       | PK  | Horizo | PASS    |
| 4  | 5460            | 34.86          | 51.20          | 16.34         | 54.00          | 2.80        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

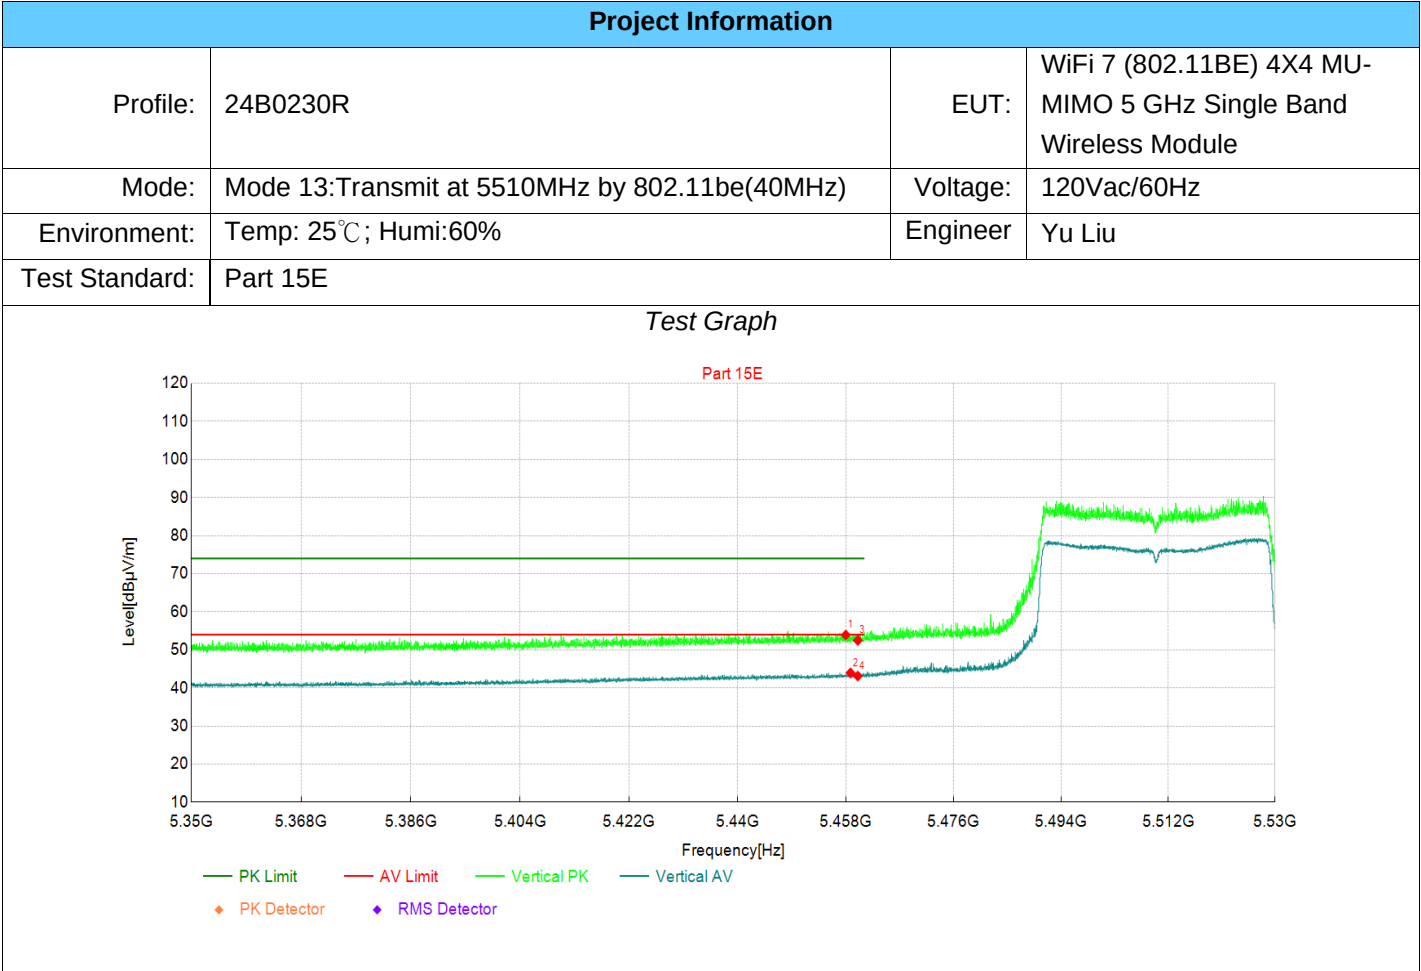

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 37.60          | 53.91          | 16.31         | 74.00          | 20.09       | PK  | Vertic | PASS    |
| 2                   | 5459            | 27.61          | 43.94          | 16.33         | 54.00          | 10.06       | AV  | Vertic | PASS    |
| 3                   | 5460            | 36.15          | 52.49          | 16.34         | 74.00          | 21.51       | PK  | Vertic | PASS    |
| 4                   | 5460            | 26.79          | 43.13          | 16.34         | 54.00          | 10.87       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

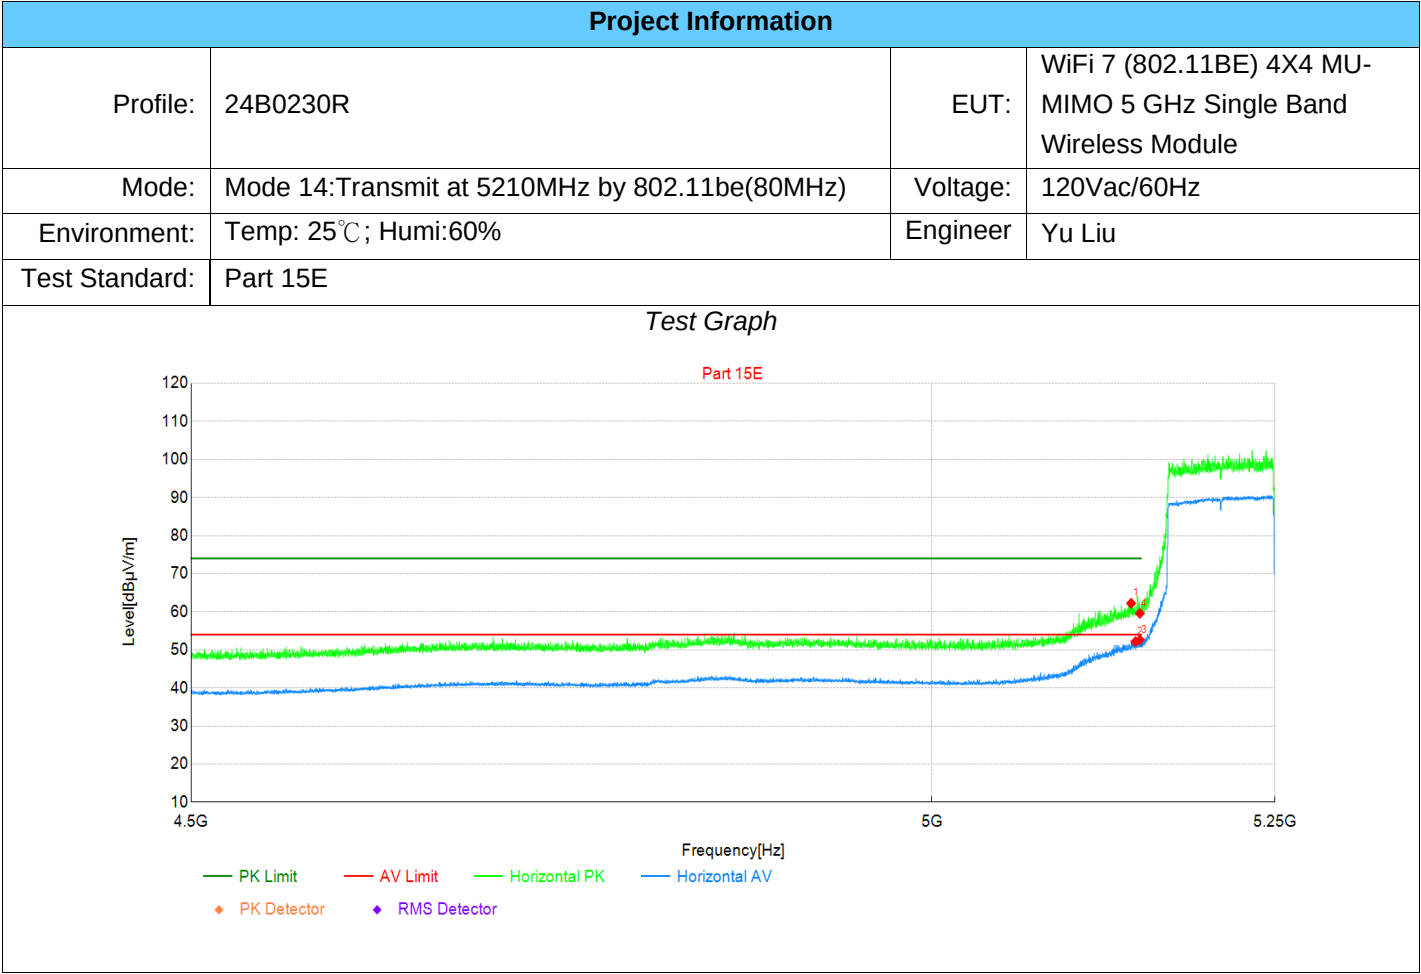

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5144            | 47.18          | 62.25          | 15.07         | 74.00          | 11.75       | PK  | Horizo | PASS    |
| 2                   | 5147            | 37.06          | 52.15          | 15.09         | 54.00          | 1.85        | AV  | Horizo | PASS    |
| 3                   | 5150            | 37.53          | 52.64          | 15.11         | 54.00          | 1.36        | AV  | Horizo | PASS    |
| 4                   | 5150            | 44.47          | 59.58          | 15.11         | 74.00          | 14.42       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level


Test Report

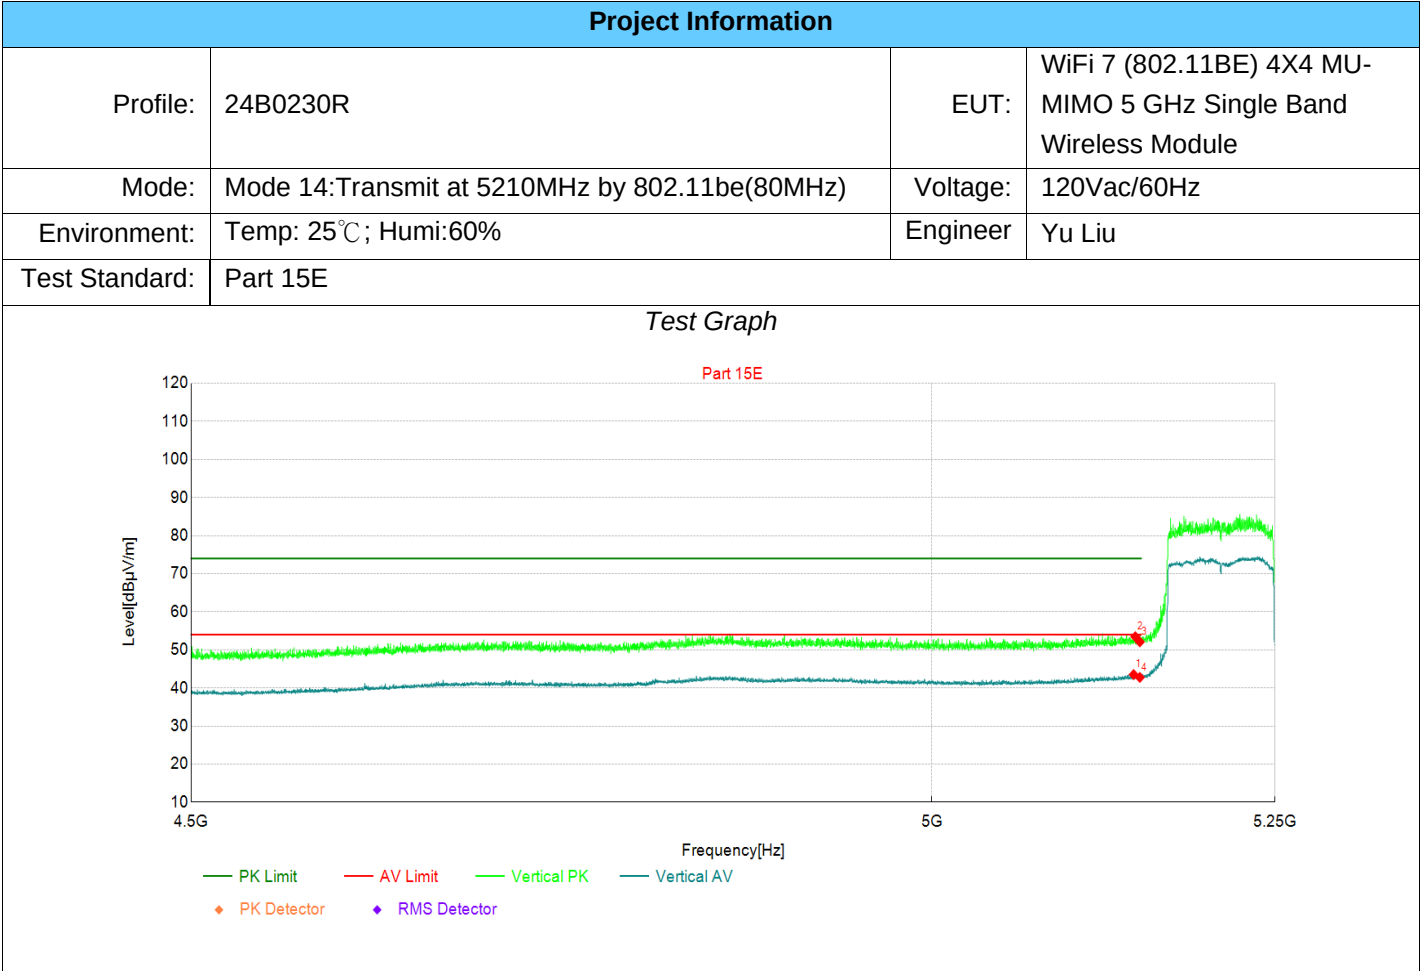

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5145            | 28.43          | 43.51          | 15.08         | 54.00          | 10.49       | AV  | Vertic | PASS    |
| 2                   | 5147            | 38.37          | 53.46          | 15.09         | 74.00          | 20.54       | PK  | Vertic | PASS    |
| 3                   | 5150            | 36.99          | 52.10          | 15.11         | 74.00          | 21.90       | PK  | Vertic | PASS    |
| 4                   | 5150            | 27.66          | 42.77          | 15.11         | 54.00          | 11.23       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

Test Report

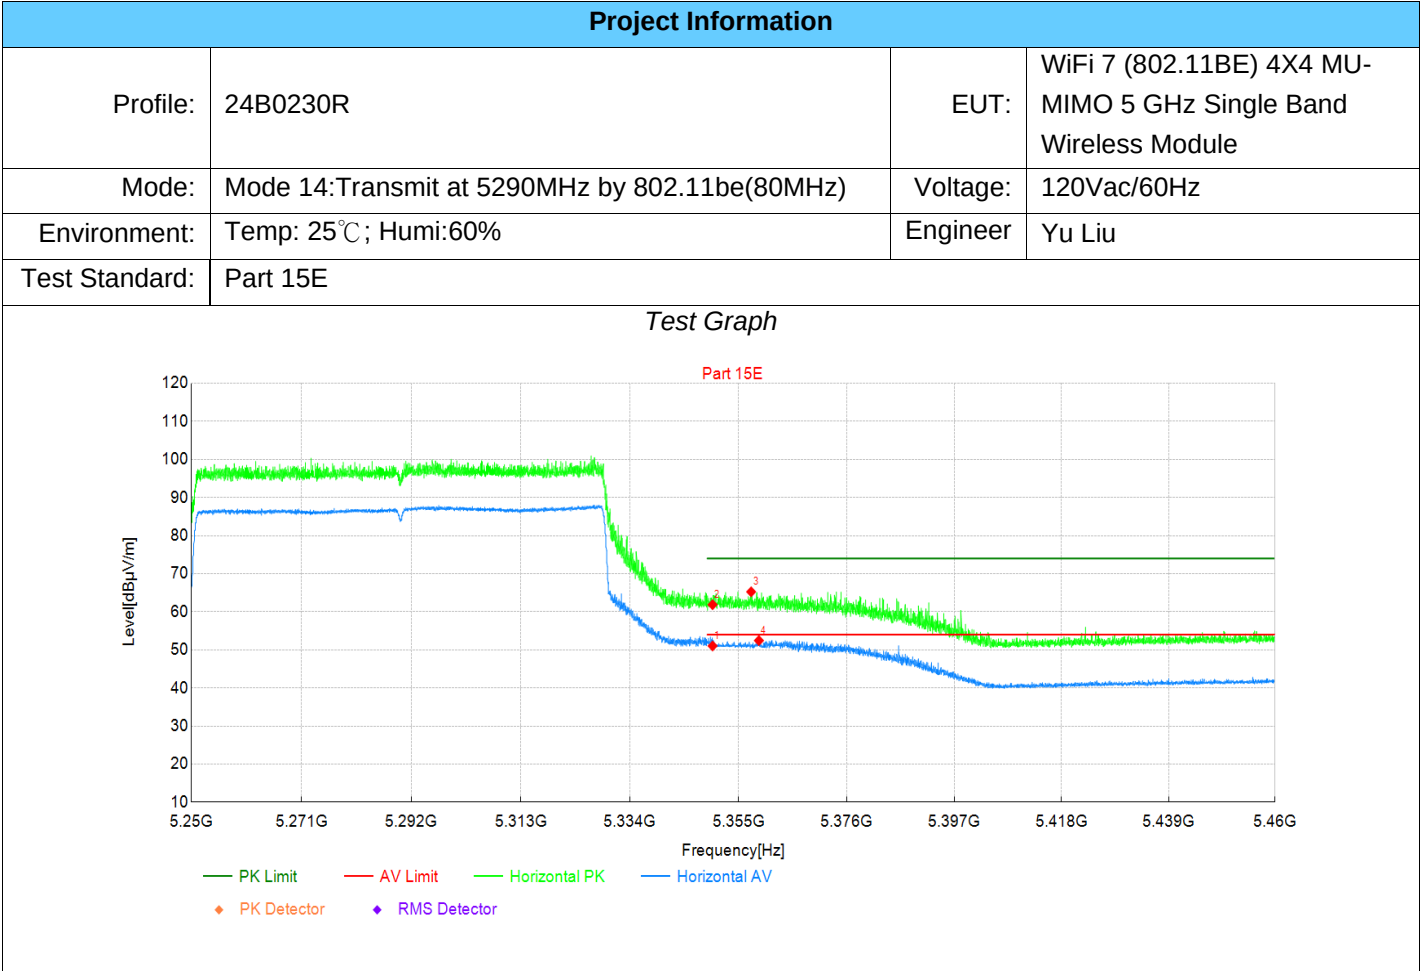

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5350            | 35.33          | 51.04          | 15.71         | 54.00          | 2.96        | AV  | Horizo | PASS    |
| 2                   | 5350            | 46.16          | 61.87          | 15.71         | 74.00          | 12.13       | PK  | Horizo | PASS    |
| 3                   | 5357            | 49.55          | 65.25          | 15.70         | 74.00          | 8.75        | PK  | Horizo | PASS    |
| 4                   | 5359            | 36.74          | 52.44          | 15.70         | 54.00          | 1.56        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 14:Transmit at 5290MHz by 802.11be(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

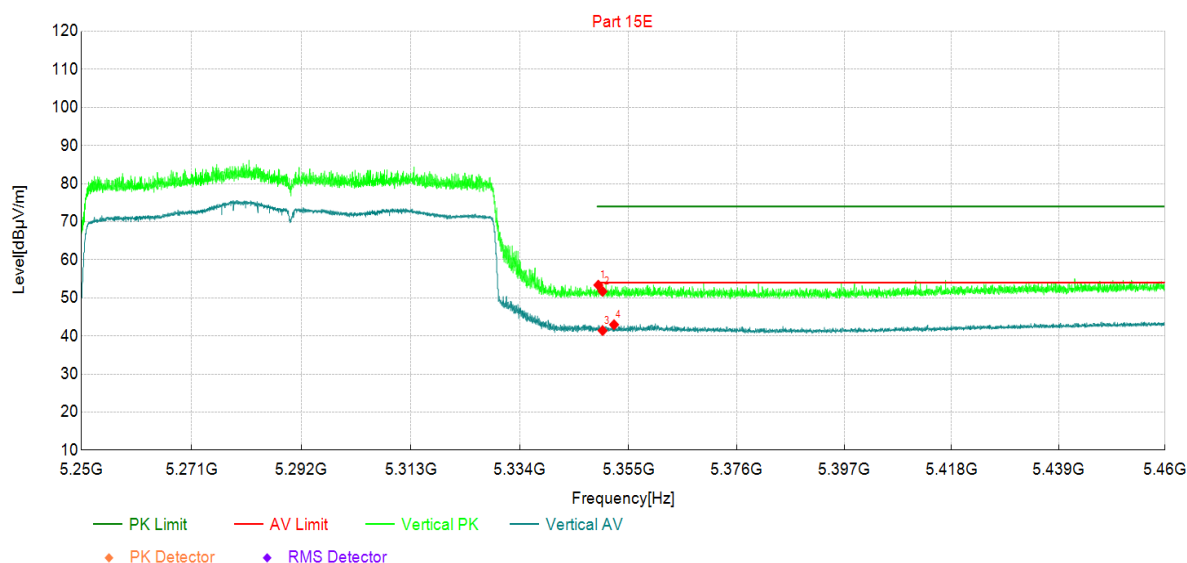

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5349            | 37.65          | 53.36          | 15.71         | 74.00          | 20.64       | PK  | Vertic | PASS    |
| 2  | 5350            | 35.99          | 51.70          | 15.71         | 74.00          | 22.30       | PK  | Vertic | PASS    |
| 3  | 5350            | 25.69          | 41.40          | 15.71         | 54.00          | 12.60       | AV  | Vertic | PASS    |
| 4  | 5352            | 27.25          | 42.96          | 15.71         | 54.00          | 11.04       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 14:Transmit at 5530MHz by 802.11be(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

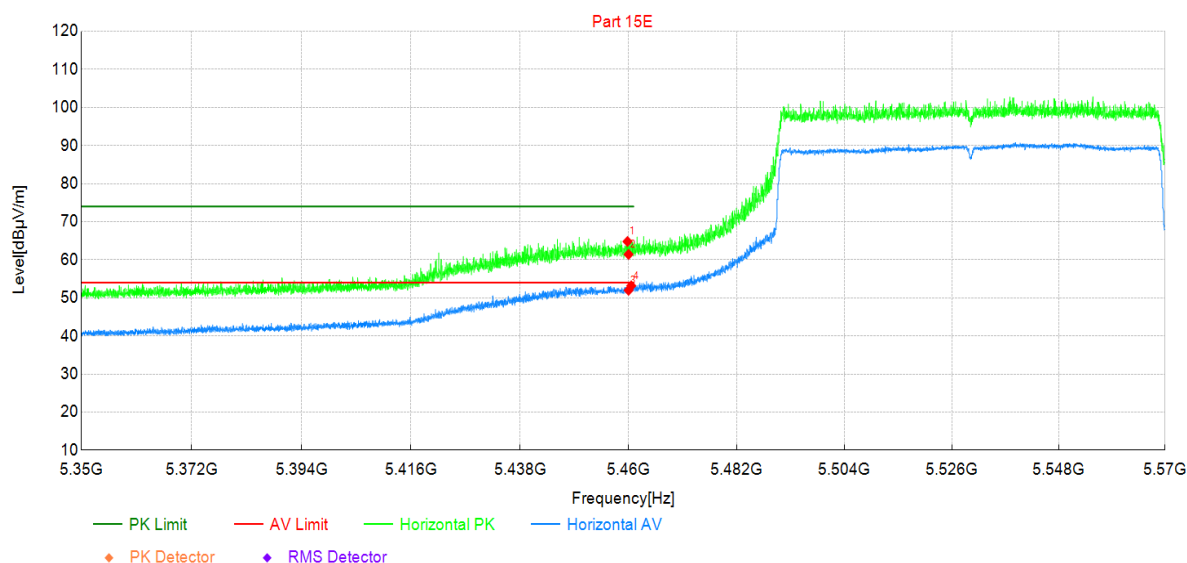

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5460            | 48.46          | 64.80          | 16.34         | 74.00          | 9.20        | PK  | Horizo | PASS    |
| 2  | 5460            | 45.07          | 61.41          | 16.34         | 74.00          | 12.59       | PK  | Horizo | PASS    |
| 3  | 5460            | 35.64          | 51.98          | 16.34         | 54.00          | 2.02        | AV  | Horizo | PASS    |
| 4  | 5461            | 36.81          | 53.16          | 16.35         | 54.00          | 0.84        | AV  | Horizo | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                |          |                                                                 |
|----------------|------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                       | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 14:Transmit at 5530MHz by 802.11be(80MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                            | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                       |          |                                                                 |

### Test Graph

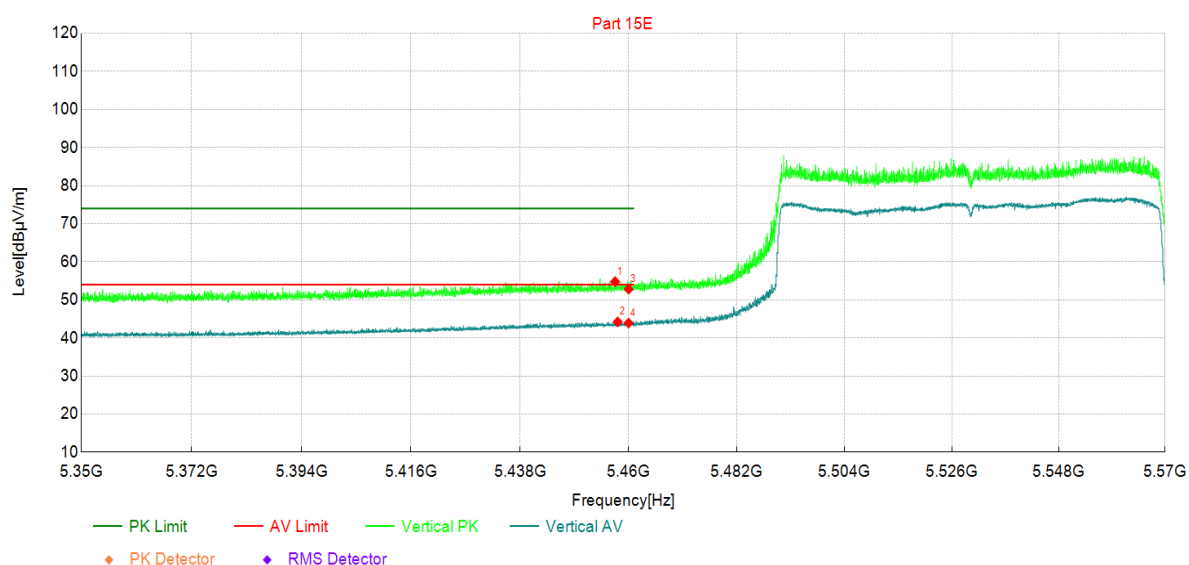

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5457            | 38.48          | 54.79          | 16.31         | 74.00          | 19.21       | PK  | Vertic | PASS    |
| 2  | 5458            | 27.90          | 44.21          | 16.31         | 54.00          | 9.79        | AV  | Vertic | PASS    |
| 3  | 5460            | 36.47          | 52.81          | 16.34         | 74.00          | 21.19       | PK  | Vertic | PASS    |
| 4  | 5460            | 27.57          | 43.91          | 16.34         | 54.00          | 10.09       | AV  | Vertic | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 15:Transmit at 5250MHz by 802.11be(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                             | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

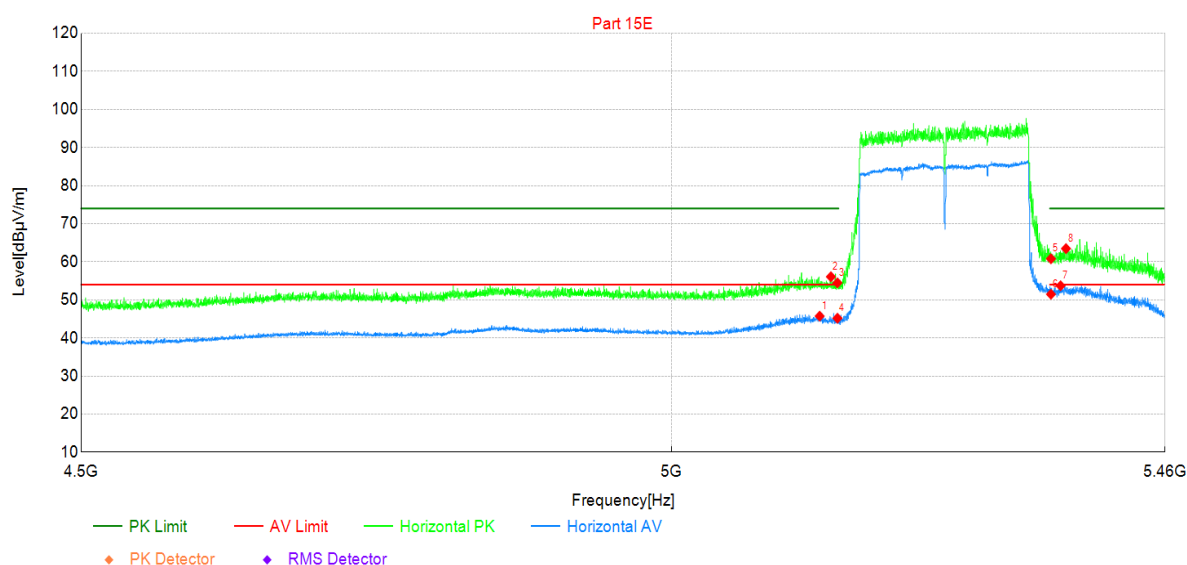

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5134            | 30.70          | 45.72          | 15.02         | 54.00          | 8.28        | AV  | Horizo | PASS    |
| 2  | 5144            | 40.99          | 56.07          | 15.08         | 74.00          | 17.93       | PK  | Horizo | PASS    |
| 3  | 5150            | 39.36          | 54.47          | 15.11         | 74.00          | 19.53       | PK  | Horizo | PASS    |
| 4  | 5150            | 30.07          | 45.18          | 15.11         | 54.00          | 8.82        | AV  | Horizo | PASS    |
| 5  | 5350            | 45.09          | 60.80          | 15.71         | 74.00          | 13.20       | PK  | Horizo | PASS    |
| 6  | 5350            | 35.77          | 51.48          | 15.71         | 54.00          | 2.52        | AV  | Horizo | PASS    |
| 7  | 5359            | 38.01          | 53.71          | 15.70         | 54.00          | 0.29        | AV  | Horizo | PASS    |
| 8  | 5364            | 47.77          | 63.46          | 15.69         | 74.00          | 10.54       | PK  | Horizo | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 15:Transmit at 5250MHz by 802.11be(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                             | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

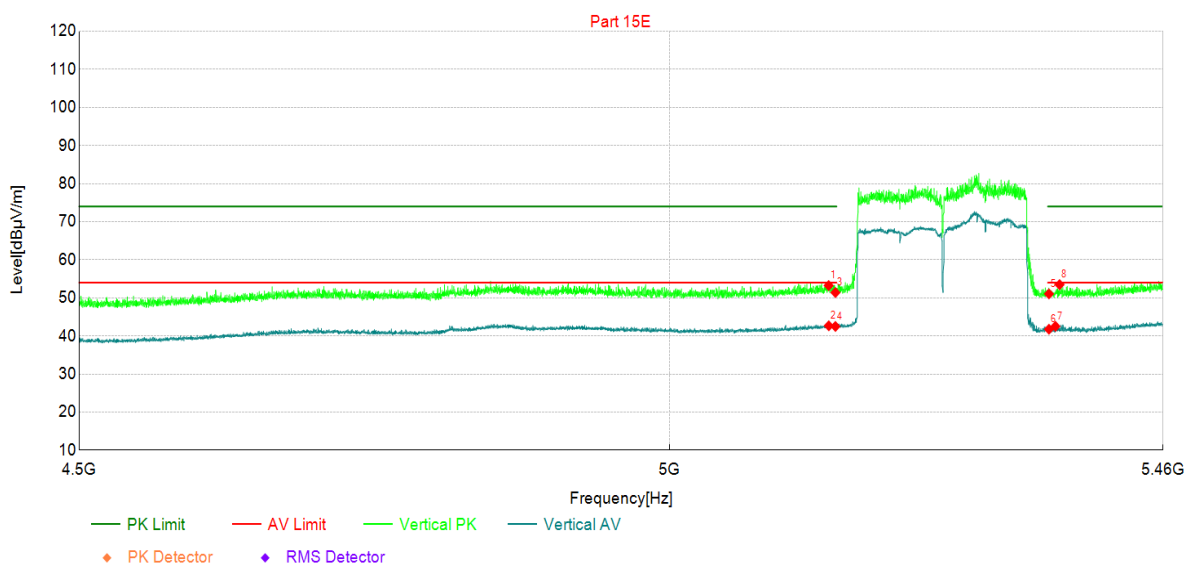


### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5144            | 38.17          | 53.24          | 15.07         | 74.00          | 20.76       | PK  | Vertic | PASS    |
| 2  | 5144            | 27.60          | 42.67          | 15.07         | 54.00          | 11.33       | AV  | Vertic | PASS    |
| 3  | 5150            | 36.29          | 51.40          | 15.11         | 74.00          | 22.60       | PK  | Vertic | PASS    |
| 4  | 5150            | 27.38          | 42.49          | 15.11         | 54.00          | 11.51       | AV  | Vertic | PASS    |
| 5  | 5350            | 35.33          | 51.04          | 15.71         | 74.00          | 22.96       | PK  | Vertic | PASS    |
| 6  | 5350            | 26.06          | 41.77          | 15.71         | 54.00          | 12.23       | AV  | Vertic | PASS    |
| 7  | 5356            | 26.82          | 42.52          | 15.70         | 54.00          | 11.48       | AV  | Vertic | PASS    |
| 8  | 5360            | 37.78          | 53.48          | 15.70         | 74.00          | 20.52       | PK  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

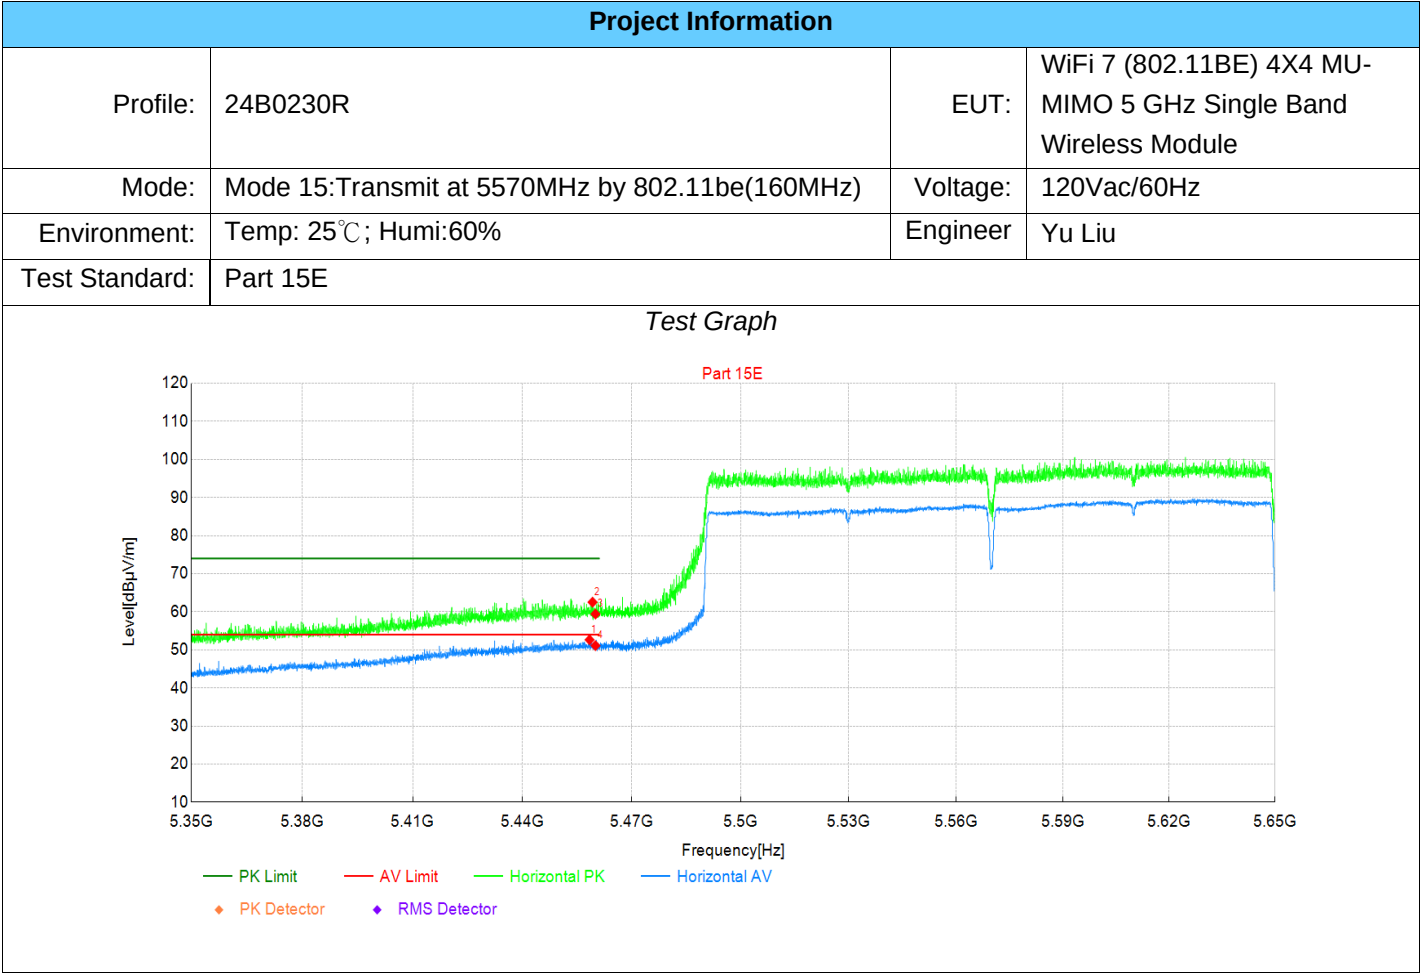

| Suspected Data List |                 |                |                |               |                |             |     |        |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO                  | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol    | Verdict |
| 1                   | 5458            | 36.32          | 52.64          | 16.32         | 54.00          | 1.36        | AV  | Horizo | PASS    |
| 2                   | 5459            | 46.20          | 62.53          | 16.33         | 74.00          | 11.47       | PK  | Horizo | PASS    |
| 3                   | 5460            | 43.07          | 59.41          | 16.34         | 74.00          | 14.59       | PK  | Horizo | PASS    |
| 4                   | 5460            | 34.78          | 51.12          | 16.34         | 54.00          | 2.88        | AV  | Horizo | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

## Test Report

### Project Information

|                |                                                 |          |                                                                 |
|----------------|-------------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                        | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 15:Transmit at 5570MHz by 802.11be(160MHz) | Voltage: | 120Vac/60Hz                                                     |
| Environment:   | Temp: 25℃; Humi:60%                             | Engineer | Yu Liu                                                          |
| Test Standard: | Part 15E                                        |          |                                                                 |

### Test Graph

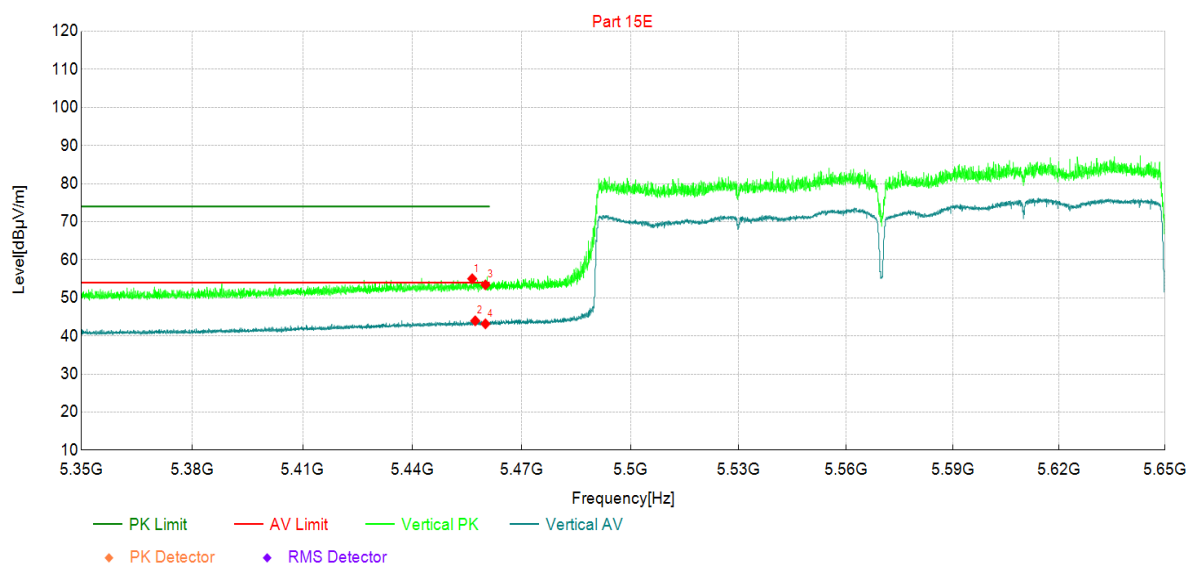

### Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5456            | 38.72          | 55.02          | 16.30         | 74.00          | 18.98       | PK  | Vertic | PASS    |
| 2  | 5457            | 27.66          | 43.97          | 16.31         | 54.00          | 10.03       | AV  | Vertic | PASS    |
| 3  | 5460            | 37.08          | 53.42          | 16.34         | 74.00          | 20.58       | PK  | Vertic | PASS    |
| 4  | 5460            | 26.84          | 43.18          | 16.34         | 54.00          | 10.82       | AV  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5745MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

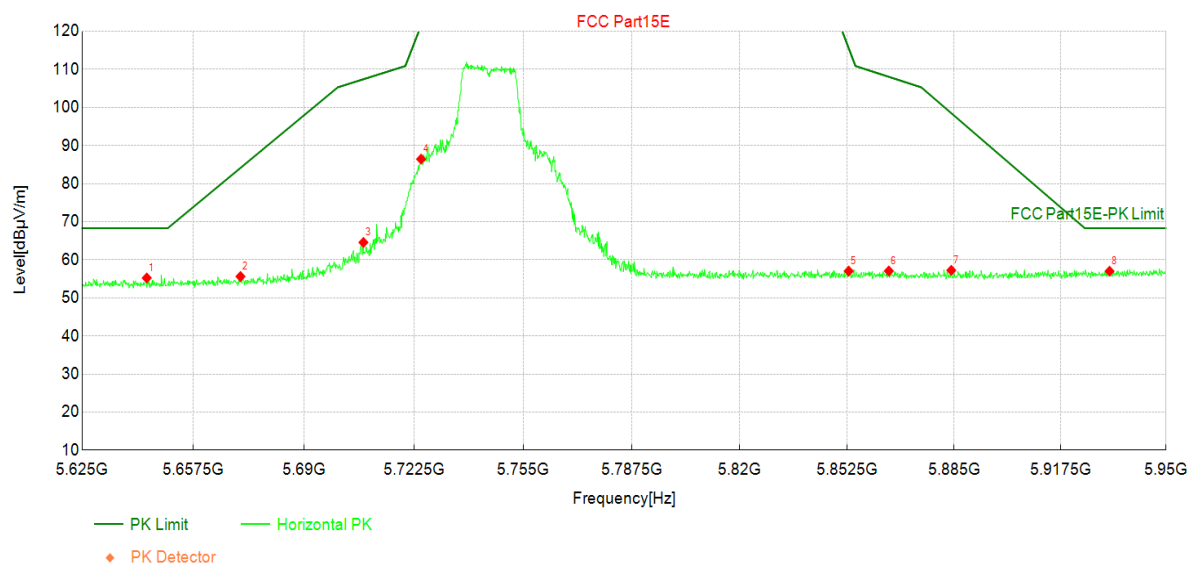

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5644            | 37.08          | 55.23          | 18.15         | 68.30          | 13.07       | PK  | Horizo | PASS    |
| 2  | 5671            | 37.20          | 55.62          | 18.42         | 84.13          | 28.51       | PK  | Horizo | PASS    |
| 3  | 5708            | 45.87          | 64.57          | 18.70         | 107.43         | 42.86       | PK  | Horizo | PASS    |
| 4  | 5725            | 67.78          | 86.45          | 18.67         | 121.53         | 35.08       | PK  | Horizo | PASS    |
| 5  | 5853            | 38.08          | 57.04          | 18.96         | 115.60         | 58.56       | PK  | Horizo | PASS    |
| 6  | 5865            | 38.01          | 57.07          | 19.06         | 108.06         | 50.99       | PK  | Horizo | PASS    |
| 7  | 5884            | 38.02          | 57.23          | 19.21         | 98.50          | 41.27       | PK  | Horizo | PASS    |
| 8  | 5933            | 37.43          | 57.01          | 19.58         | 68.30          | 11.29       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5745MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

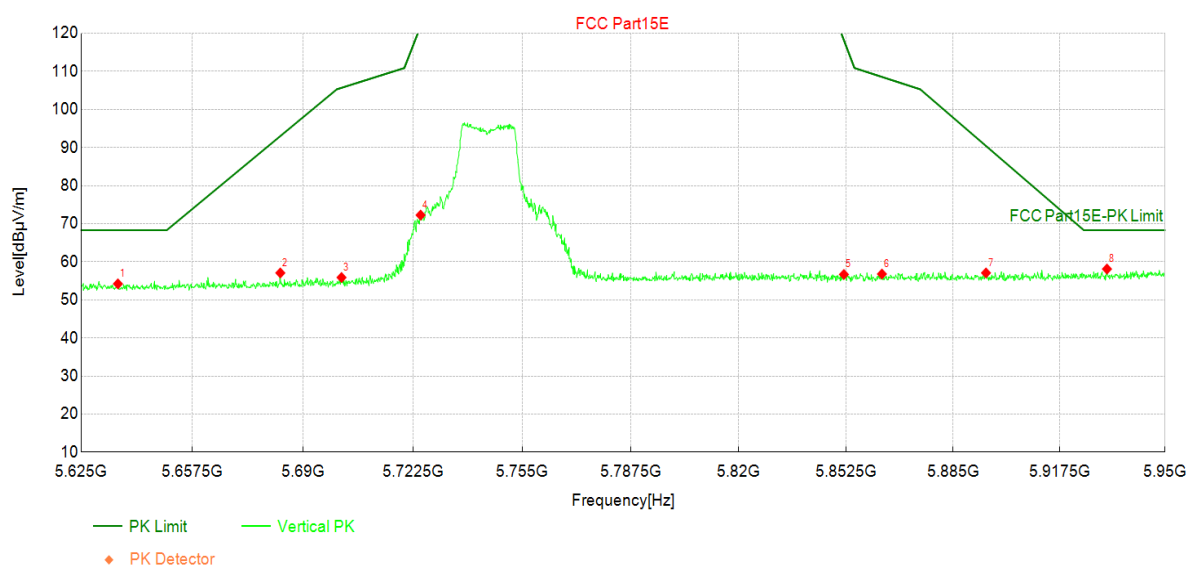

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5636            | 36.14          | 54.21          | 18.07         | 68.30          | 14.09       | PK  | Vertic | PASS    |
| 2  | 5683            | 38.53          | 57.07          | 18.54         | 93.03          | 35.96       | PK  | Vertic | PASS    |
| 3  | 5701            | 37.18          | 55.88          | 18.70         | 105.70         | 49.82       | PK  | Vertic | PASS    |
| 4  | 5725            | 53.60          | 72.27          | 18.67         | 121.90         | 49.63       | PK  | Vertic | PASS    |
| 5  | 5852            | 37.72          | 56.68          | 18.96         | 118.19         | 61.51       | PK  | Vertic | PASS    |
| 6  | 5863            | 37.74          | 56.79          | 19.05         | 108.56         | 51.77       | PK  | Vertic | PASS    |
| 7  | 5895            | 37.78          | 57.08          | 19.30         | 90.43          | 33.35       | PK  | Vertic | PASS    |
| 8  | 5932            | 38.52          | 58.10          | 19.58         | 68.30          | 10.20       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5785MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

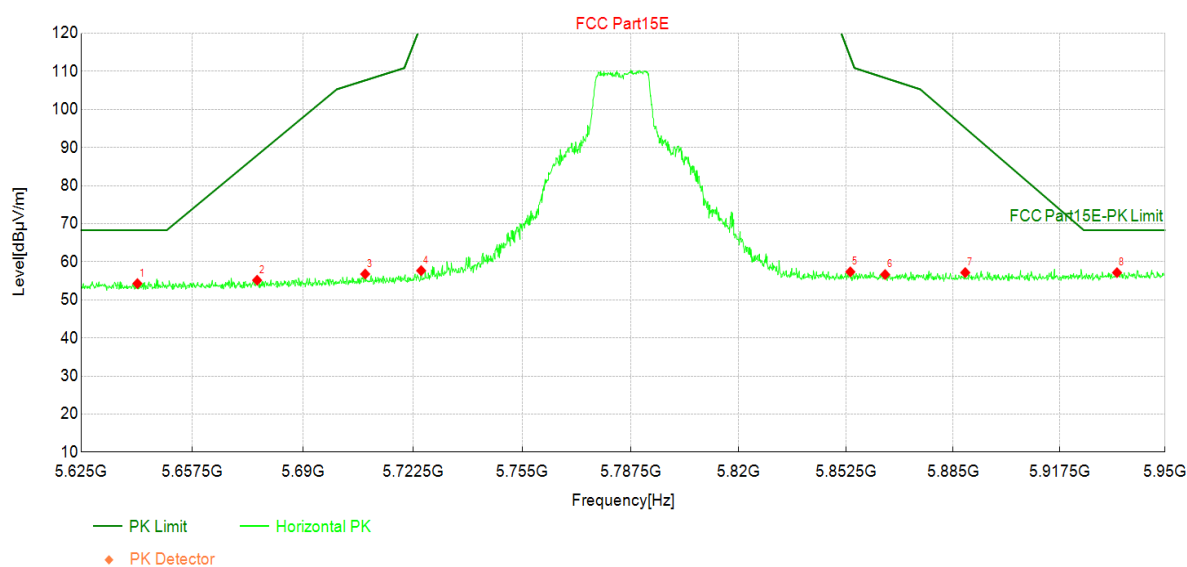

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5641            | 36.15          | 54.28          | 18.13         | 68.30          | 14.02       | PK  | Horizo | PASS    |
| 2  | 5677            | 36.68          | 55.16          | 18.48         | 87.98          | 32.82       | PK  | Horizo | PASS    |
| 3  | 5708            | 38.08          | 56.78          | 18.70         | 107.66         | 50.88       | PK  | Horizo | PASS    |
| 4  | 5725            | 39.00          | 57.67          | 18.67         | 122.27         | 64.60       | PK  | Horizo | PASS    |
| 5  | 5854            | 38.39          | 57.36          | 18.97         | 113.74         | 56.38       | PK  | Horizo | PASS    |
| 6  | 5864            | 37.60          | 56.66          | 19.06         | 108.29         | 51.63       | PK  | Horizo | PASS    |
| 7  | 5889            | 37.91          | 57.16          | 19.25         | 95.13          | 37.97       | PK  | Horizo | PASS    |
| 8  | 5935            | 37.54          | 57.15          | 19.61         | 68.30          | 11.15       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5785MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

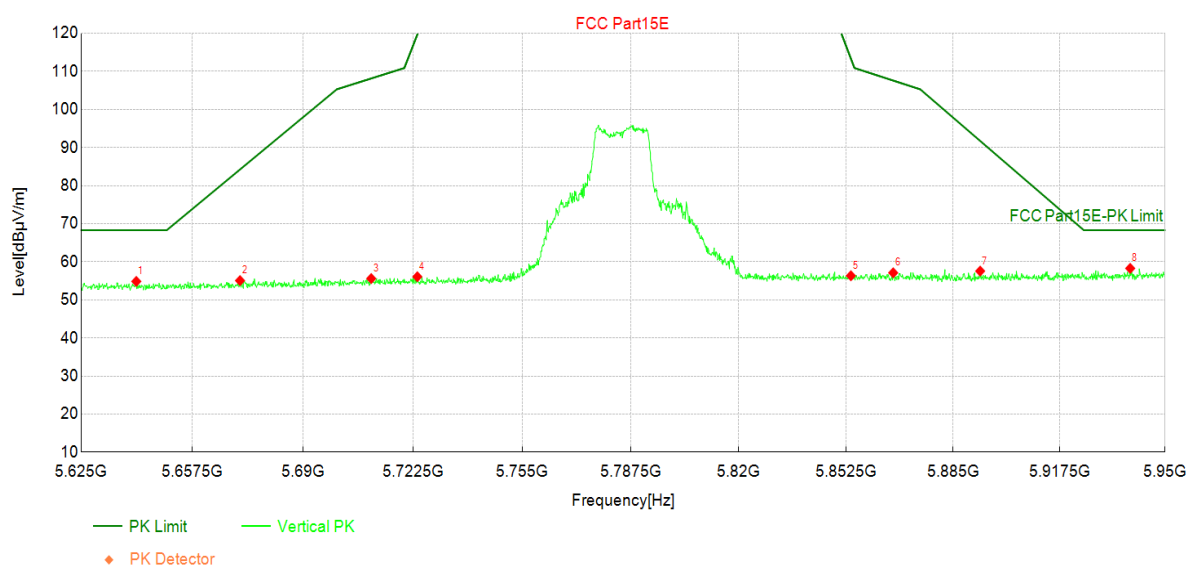

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5641            | 36.72          | 54.84          | 18.12         | 68.30          | 13.46       | PK  | Vertic | PASS    |
| 2  | 5671            | 36.64          | 55.06          | 18.42         | 84.25          | 29.19       | PK  | Vertic | PASS    |
| 3  | 5710            | 36.90          | 55.59          | 18.69         | 108.16         | 52.57       | PK  | Vertic | PASS    |
| 4  | 5724            | 37.42          | 56.08          | 18.66         | 119.68         | 63.60       | PK  | Vertic | PASS    |
| 5  | 5854            | 37.36          | 56.33          | 18.97         | 113.37         | 57.04       | PK  | Vertic | PASS    |
| 6  | 5867            | 38.04          | 57.11          | 19.07         | 107.61         | 50.50       | PK  | Vertic | PASS    |
| 7  | 5893            | 38.28          | 57.56          | 19.28         | 91.75          | 34.19       | PK  | Vertic | PASS    |
| 8  | 5939            | 38.64          | 58.28          | 19.64         | 68.30          | 10.02       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5825MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

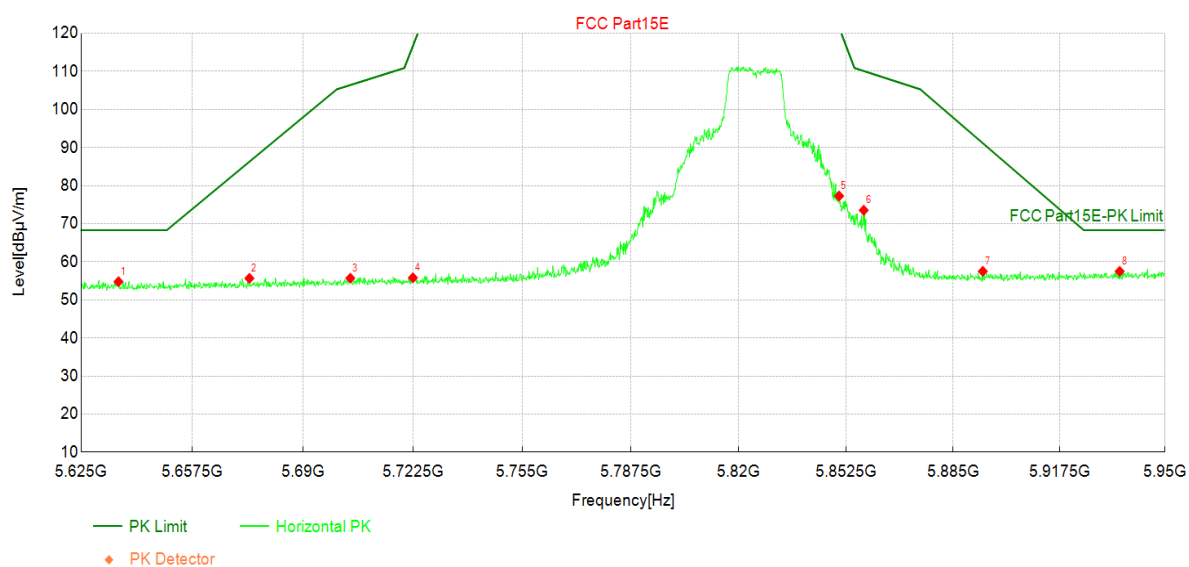

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5636            | 36.71          | 54.78          | 18.07         | 68.30          | 13.52       | PK  | Horizo | PASS    |
| 2  | 5674            | 37.20          | 55.65          | 18.45         | 86.29          | 30.64       | PK  | Horizo | PASS    |
| 3  | 5704            | 37.00          | 55.70          | 18.70         | 106.43         | 50.73       | PK  | Horizo | PASS    |
| 4  | 5723            | 37.13          | 55.80          | 18.67         | 116.71         | 60.91       | PK  | Horizo | PASS    |
| 5  | 5850            | 58.33          | 77.28          | 18.95         | 121.53         | 44.25       | PK  | Horizo | PASS    |
| 6  | 5858            | 54.53          | 73.53          | 19.00         | 110.11         | 36.58       | PK  | Horizo | PASS    |
| 7  | 5894            | 38.21          | 57.51          | 19.30         | 91.15          | 33.64       | PK  | Horizo | PASS    |
| 8  | 5936            | 37.87          | 57.48          | 19.61         | 68.30          | 10.82       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 1:Transmit at 5825MHz by 802.11a(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

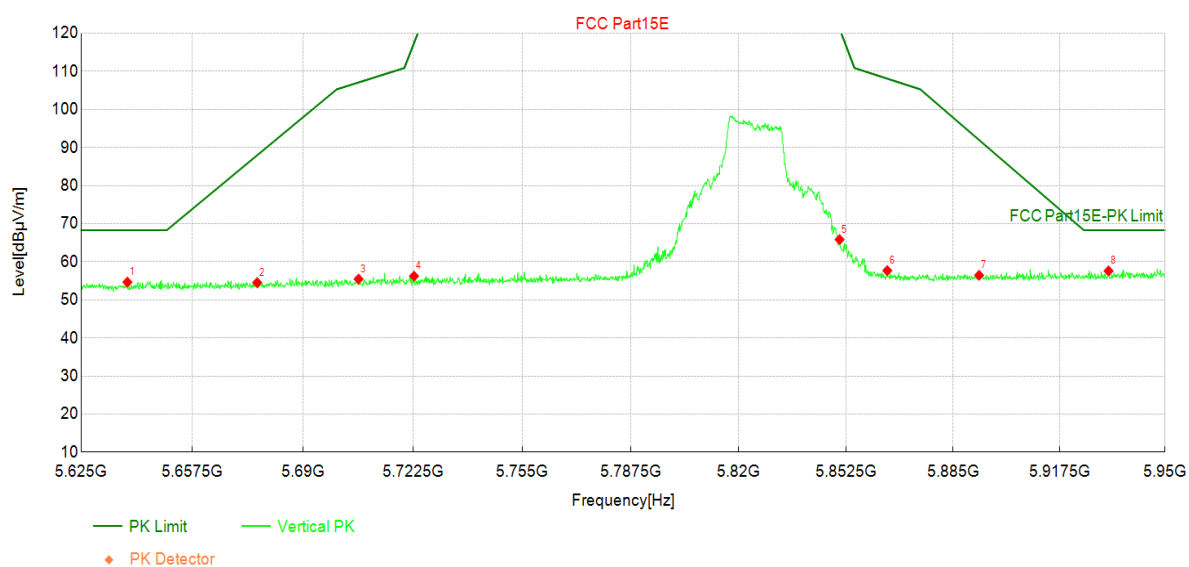

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5638            | 36.56          | 54.66          | 18.10         | 68.30          | 13.64       | PK  | Vertic | PASS    |
| 2  | 5677            | 36.05          | 54.53          | 18.48         | 87.98          | 33.45       | PK  | Vertic | PASS    |
| 3  | 5706            | 36.77          | 55.46          | 18.69         | 107.11         | 51.65       | PK  | Vertic | PASS    |
| 4  | 5723            | 37.58          | 56.25          | 18.67         | 117.45         | 61.20       | PK  | Vertic | PASS    |
| 5  | 5851            | 46.89          | 65.84          | 18.95         | 121.16         | 55.32       | PK  | Vertic | PASS    |
| 6  | 5865            | 38.62          | 57.68          | 19.06         | 108.11         | 50.43       | PK  | Vertic | PASS    |
| 7  | 5893            | 37.17          | 56.45          | 19.28         | 91.99          | 35.54       | PK  | Vertic | PASS    |
| 8  | 5933            | 38.02          | 57.60          | 19.58         | 68.30          | 10.70       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5745MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

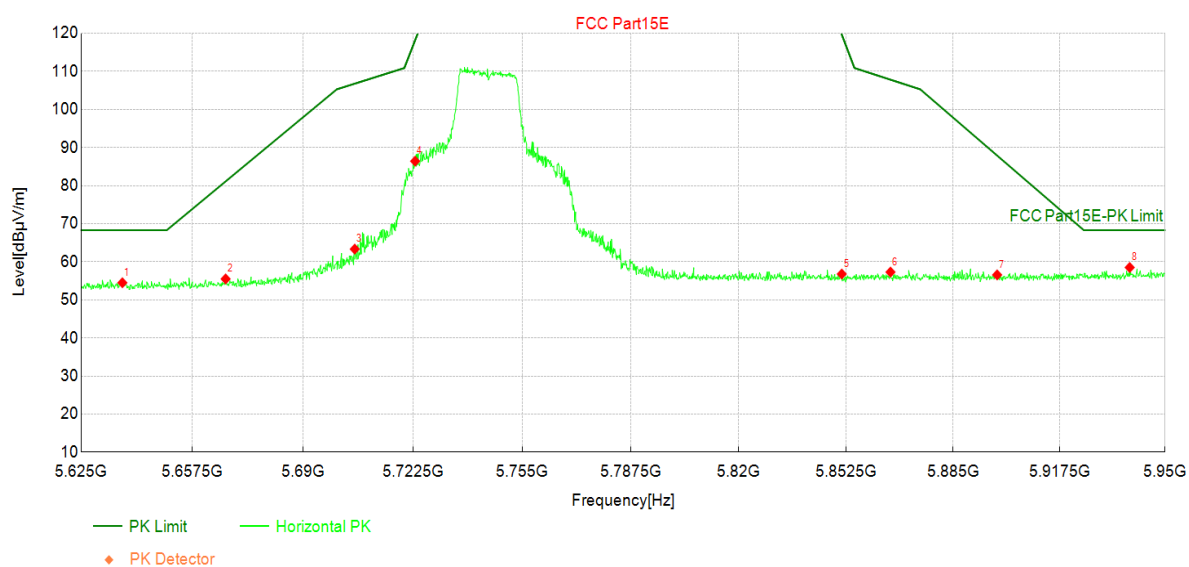

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5637            | 36.41          | 54.50          | 18.09         | 68.30          | 13.80       | PK  | Horizo | PASS    |
| 2  | 5667            | 37.12          | 55.50          | 18.38         | 81.12          | 25.62       | PK  | Horizo | PASS    |
| 3  | 5705            | 44.64          | 63.34          | 18.70         | 106.79         | 43.45       | PK  | Horizo | PASS    |
| 4  | 5723            | 67.77          | 86.44          | 18.67         | 118.20         | 31.76       | PK  | Horizo | PASS    |
| 5  | 5851            | 37.84          | 56.79          | 18.95         | 119.68         | 62.89       | PK  | Horizo | PASS    |
| 6  | 5866            | 38.23          | 57.30          | 19.07         | 107.83         | 50.53       | PK  | Horizo | PASS    |
| 7  | 5898            | 37.23          | 56.56          | 19.33         | 87.90          | 31.34       | PK  | Horizo | PASS    |
| 8  | 5939            | 38.87          | 58.51          | 19.64         | 68.30          | 9.79        | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5745MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

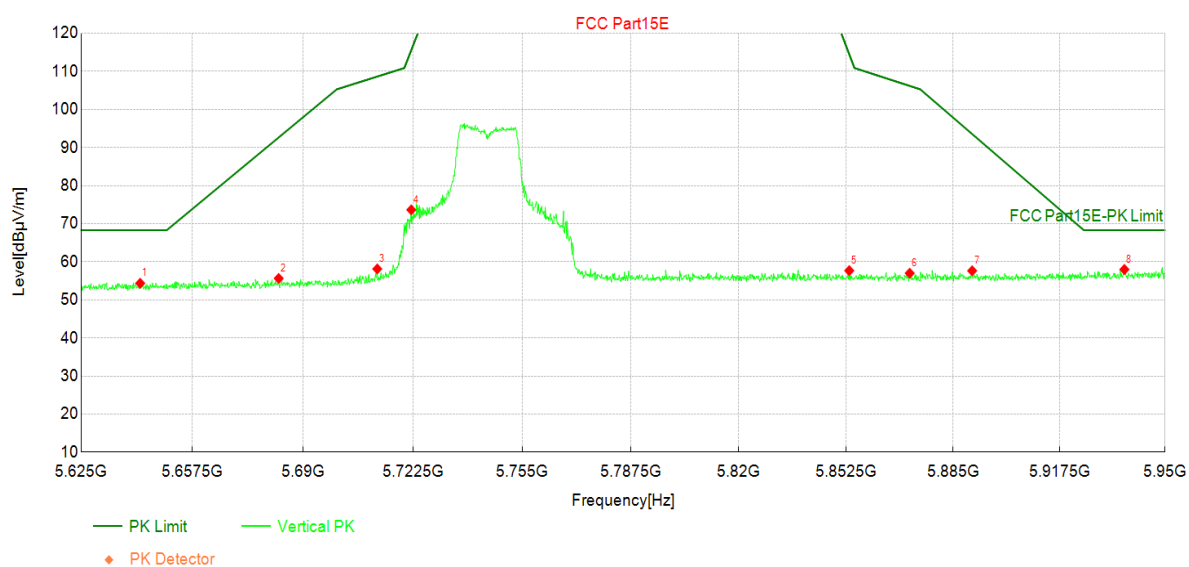

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5642            | 36.22          | 54.36          | 18.14         | 68.30          | 13.94       | PK  | Vertic | PASS    |
| 2  | 5683            | 37.09          | 55.63          | 18.54         | 92.67          | 37.04       | PK  | Vertic | PASS    |
| 3  | 5712            | 39.43          | 58.12          | 18.69         | 108.66         | 50.54       | PK  | Vertic | PASS    |
| 4  | 5722            | 54.98          | 73.65          | 18.67         | 115.60         | 41.95       | PK  | Vertic | PASS    |
| 5  | 5853            | 38.72          | 57.68          | 18.96         | 114.49         | 56.81       | PK  | Vertic | PASS    |
| 6  | 5872            | 37.88          | 57.00          | 19.12         | 106.20         | 49.20       | PK  | Vertic | PASS    |
| 7  | 5891            | 38.36          | 57.63          | 19.27         | 93.56          | 35.93       | PK  | Vertic | PASS    |
| 8  | 5937            | 38.36          | 57.99          | 19.63         | 68.30          | 10.31       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5785MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

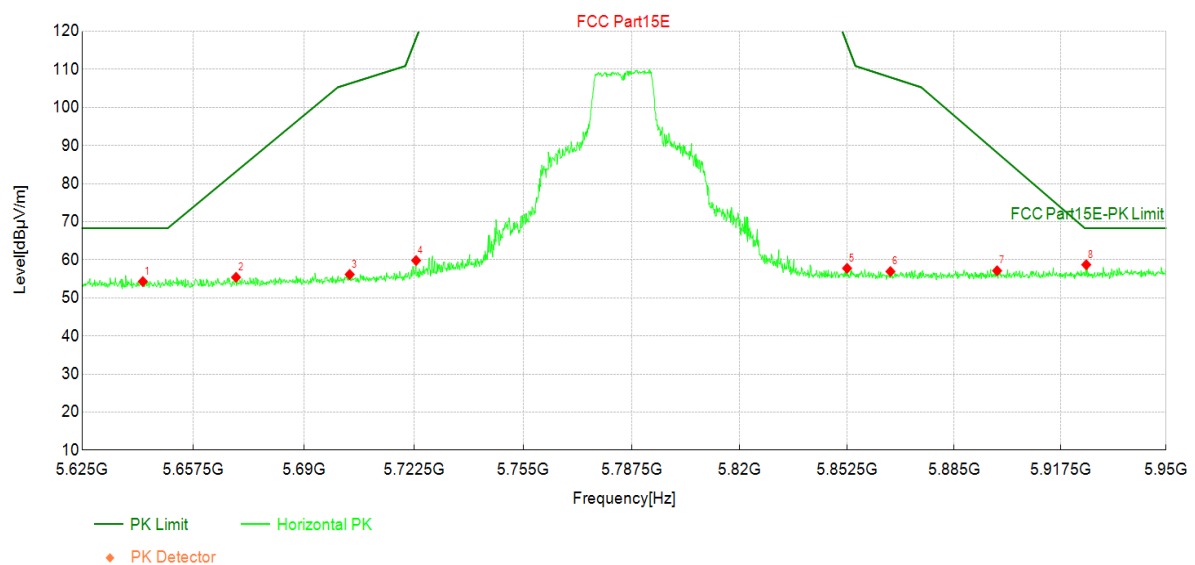

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5643            | 36.15          | 54.29          | 18.14         | 68.30          | 14.01       | PK  | Horizo | PASS    |
| 2  | 5670            | 36.99          | 55.40          | 18.41         | 83.17          | 27.77       | PK  | Horizo | PASS    |
| 3  | 5704            | 37.44          | 56.15          | 18.71         | 106.29         | 50.14       | PK  | Horizo | PASS    |
| 4  | 5723            | 41.15          | 59.82          | 18.67         | 118.20         | 58.38       | PK  | Horizo | PASS    |
| 5  | 5852            | 38.80          | 57.76          | 18.96         | 116.71         | 58.95       | PK  | Horizo | PASS    |
| 6  | 5866            | 37.86          | 56.92          | 19.06         | 107.92         | 51.00       | PK  | Horizo | PASS    |
| 7  | 5898            | 37.80          | 57.13          | 19.33         | 88.14          | 31.01       | PK  | Horizo | PASS    |
| 8  | 5925            | 39.18          | 58.71          | 19.53         | 68.30          | 9.59        | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5785MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

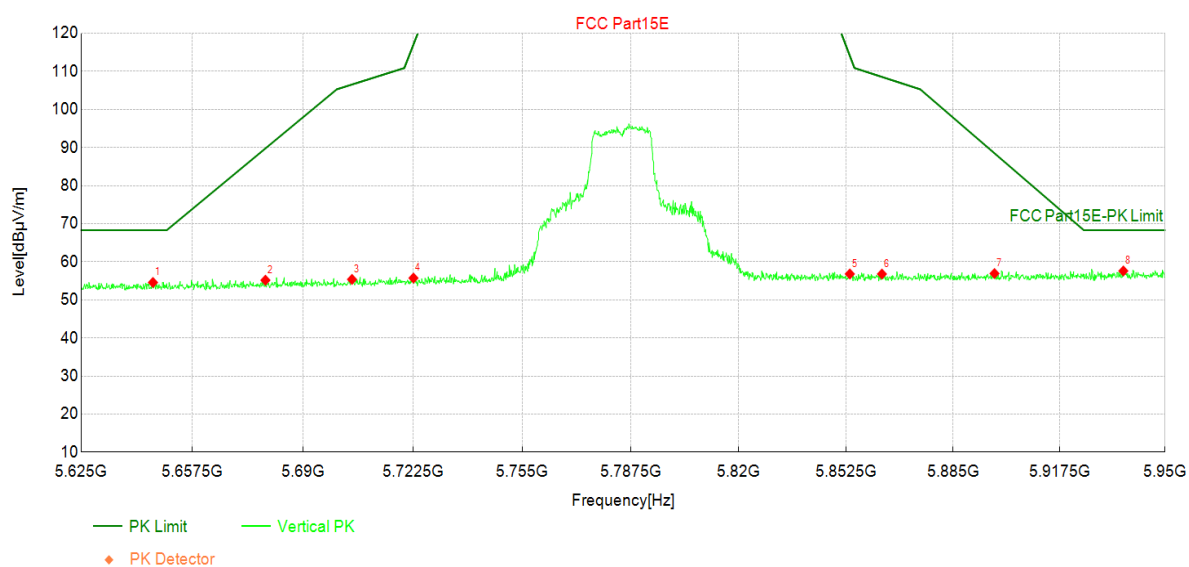

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5646            | 36.40          | 54.57          | 18.17         | 68.30          | 13.73       | PK  | Vertic | PASS    |
| 2  | 5679            | 36.66          | 55.16          | 18.50         | 89.78          | 34.62       | PK  | Vertic | PASS    |
| 3  | 5705            | 36.68          | 55.38          | 18.70         | 106.56         | 51.18       | PK  | Vertic | PASS    |
| 4  | 5723            | 37.06          | 55.73          | 18.67         | 117.08         | 61.35       | PK  | Vertic | PASS    |
| 5  | 5854            | 37.84          | 56.81          | 18.97         | 114.12         | 57.31       | PK  | Vertic | PASS    |
| 6  | 5863            | 37.74          | 56.79          | 19.05         | 108.56         | 51.77       | PK  | Vertic | PASS    |
| 7  | 5898            | 37.60          | 56.92          | 19.32         | 88.50          | 31.58       | PK  | Vertic | PASS    |
| 8  | 5937            | 37.96          | 57.59          | 19.63         | 68.30          | 10.71       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5825MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

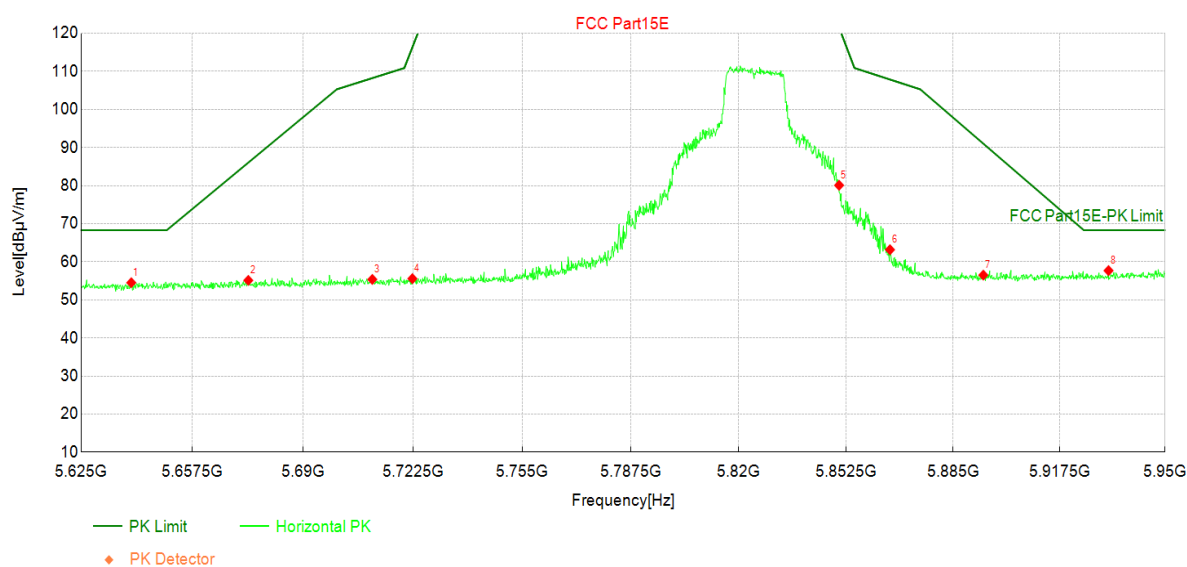

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5640            | 36.40          | 54.51          | 18.11         | 68.30          | 13.79       | PK  | Horizo | PASS    |
| 2  | 5674            | 36.67          | 55.12          | 18.45         | 86.05          | 30.93       | PK  | Horizo | PASS    |
| 3  | 5711            | 36.68          | 55.37          | 18.69         | 108.25         | 52.88       | PK  | Horizo | PASS    |
| 4  | 5722            | 36.90          | 55.57          | 18.67         | 116.34         | 60.77       | PK  | Horizo | PASS    |
| 5  | 5850            | 61.15          | 80.10          | 18.95         | 121.53         | 41.43       | PK  | Horizo | PASS    |
| 6  | 5866            | 44.11          | 63.17          | 19.06         | 107.88         | 44.71       | PK  | Horizo | PASS    |
| 7  | 5894            | 37.21          | 56.51          | 19.30         | 91.03          | 34.52       | PK  | Horizo | PASS    |
| 8  | 5933            | 38.11          | 57.69          | 19.58         | 68.30          | 10.61       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 2:Transmit at 5825MHz by 802.11n(20MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

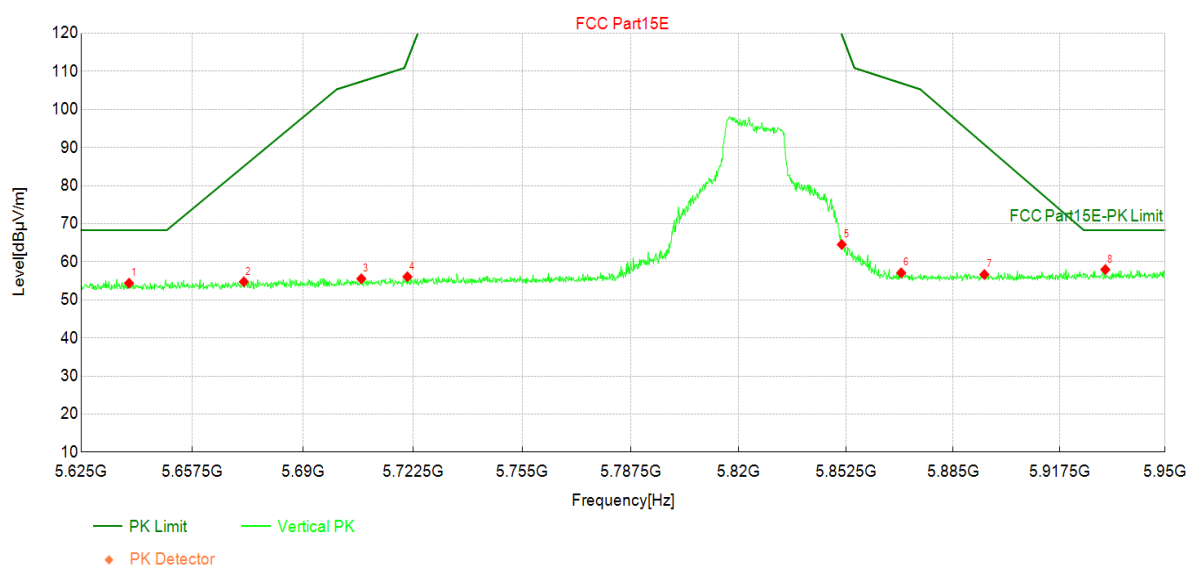

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5639            | 36.28          | 54.38          | 18.10         | 68.30          | 13.92       | PK  | Vertic | PASS    |
| 2  | 5673            | 36.30          | 54.74          | 18.44         | 85.09          | 30.35       | PK  | Vertic | PASS    |
| 3  | 5707            | 36.84          | 55.54          | 18.70         | 107.34         | 51.80       | PK  | Vertic | PASS    |
| 4  | 5721            | 37.38          | 56.06          | 18.68         | 113.01         | 56.95       | PK  | Vertic | PASS    |
| 5  | 5851            | 45.58          | 64.53          | 18.95         | 119.68         | 55.15       | PK  | Vertic | PASS    |
| 6  | 5869            | 38.01          | 57.10          | 19.09         | 106.92         | 49.82       | PK  | Vertic | PASS    |
| 7  | 5895            | 37.36          | 56.66          | 19.30         | 90.79          | 34.13       | PK  | Vertic | PASS    |
| 8  | 5932            | 38.38          | 57.96          | 19.58         | 68.30          | 10.34       | PK  | Vertic | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 3:Transmit at 5755MHz by 802.11n(40MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25°C ; Humi:60%                        | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

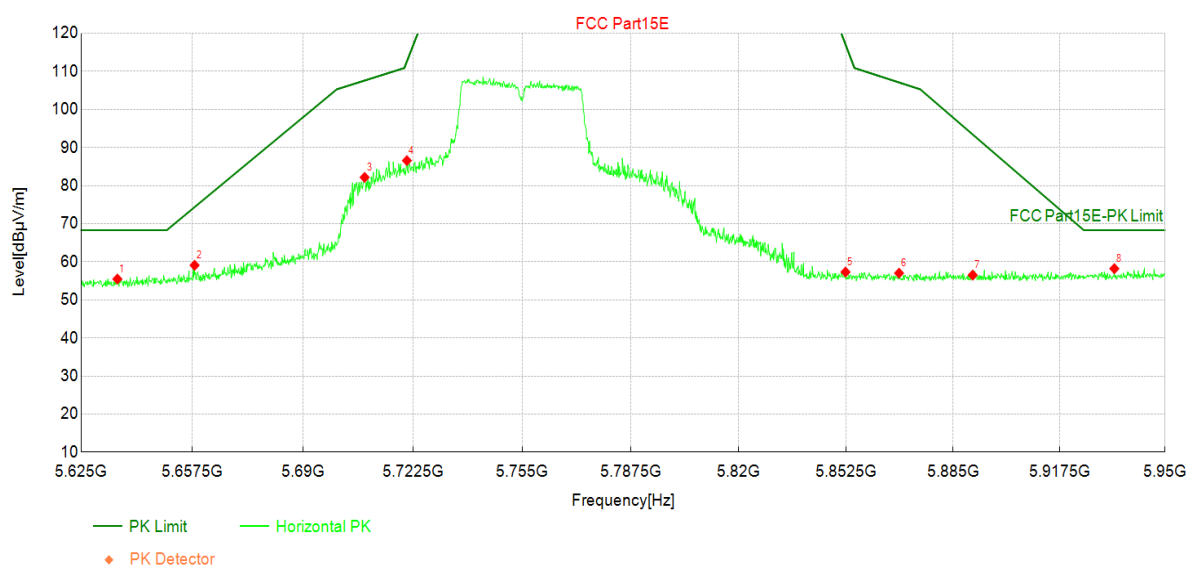

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5636            | 37.41          | 55.47          | 18.06         | 68.30          | 12.83       | PK  | Horizo | PASS    |
| 2  | 5658            | 40.79          | 59.08          | 18.29         | 74.37          | 15.29       | PK  | Horizo | PASS    |
| 3  | 5708            | 63.48          | 82.18          | 18.70         | 107.61         | 25.43       | PK  | Horizo | PASS    |
| 4  | 5721            | 67.91          | 86.59          | 18.68         | 112.63         | 26.04       | PK  | Horizo | PASS    |
| 5  | 5852            | 38.36          | 57.32          | 18.96         | 117.08         | 59.76       | PK  | Horizo | PASS    |
| 6  | 5869            | 37.93          | 57.02          | 19.09         | 107.10         | 50.08       | PK  | Horizo | PASS    |
| 7  | 5891            | 37.23          | 56.50          | 19.27         | 93.44          | 36.94       | PK  | Horizo | PASS    |
| 8  | 5934            | 38.61          | 58.21          | 19.60         | 68.30          | 10.09       | PK  | Horizo | PASS    |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Project Information

|                |                                              |          |                                                                 |
|----------------|----------------------------------------------|----------|-----------------------------------------------------------------|
| Profile:       | 24B0230R                                     | EUT:     | WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module |
| Mode:          | Mode 3:Transmit at 5755MHz by 802.11n(40MHz) | Voltage: | 3.3Vdc                                                          |
| Environment:   | Temp: 25℃; Humi:60%                          | Engineer | Yu Liu                                                          |
| Test Standard: | FCC Part15E                                  |          |                                                                 |

## Test Graph

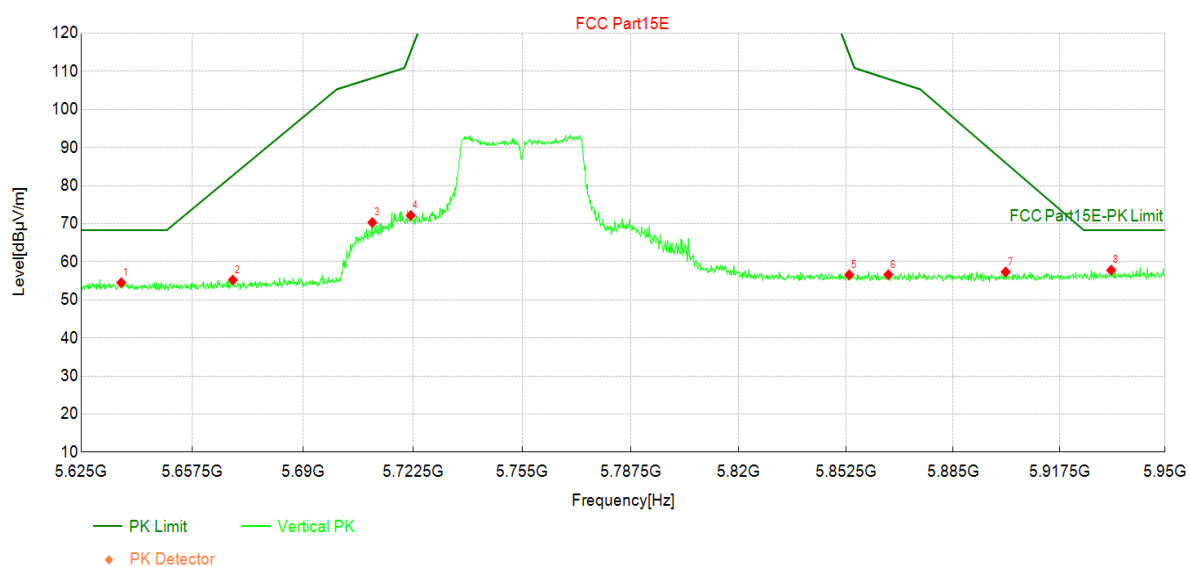

## Suspected Data List

| NO | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol    | Verdict |
|----|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| 1  | 5637            | 36.44          | 54.51          | 18.07         | 68.30          | 13.79       | PK  | Vertic | PASS    |
| 2  | 5669            | 36.81          | 55.21          | 18.40         | 82.68          | 27.47       | PK  | Vertic | PASS    |
| 3  | 5711            | 51.64          | 70.33          | 18.69         | 108.25         | 37.92       | PK  | Vertic | PASS    |
| 4  | 5722            | 53.50          | 72.17          | 18.67         | 115.23         | 43.06       | PK  | Vertic | PASS    |
| 5  | 5853            | 37.60          | 56.56          | 18.96         | 114.49         | 57.93       | PK  | Vertic | PASS    |
| 6  | 5865            | 37.55          | 56.61          | 19.06         | 108.01         | 51.40       | PK  | Vertic | PASS    |
| 7  | 5901            | 37.98          | 57.33          | 19.35         | 85.97          | 28.64       | PK  | Vertic | PASS    |
| 8  | 5933            | 38.21          | 57.81          | 19.60         | 68.30          | 10.49       | PK  | Vertic | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level