

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.384	88.796	58.186	N/A	N/A	30.611	AV
2			2483.500	45.566	14.893	-8.434	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 0	

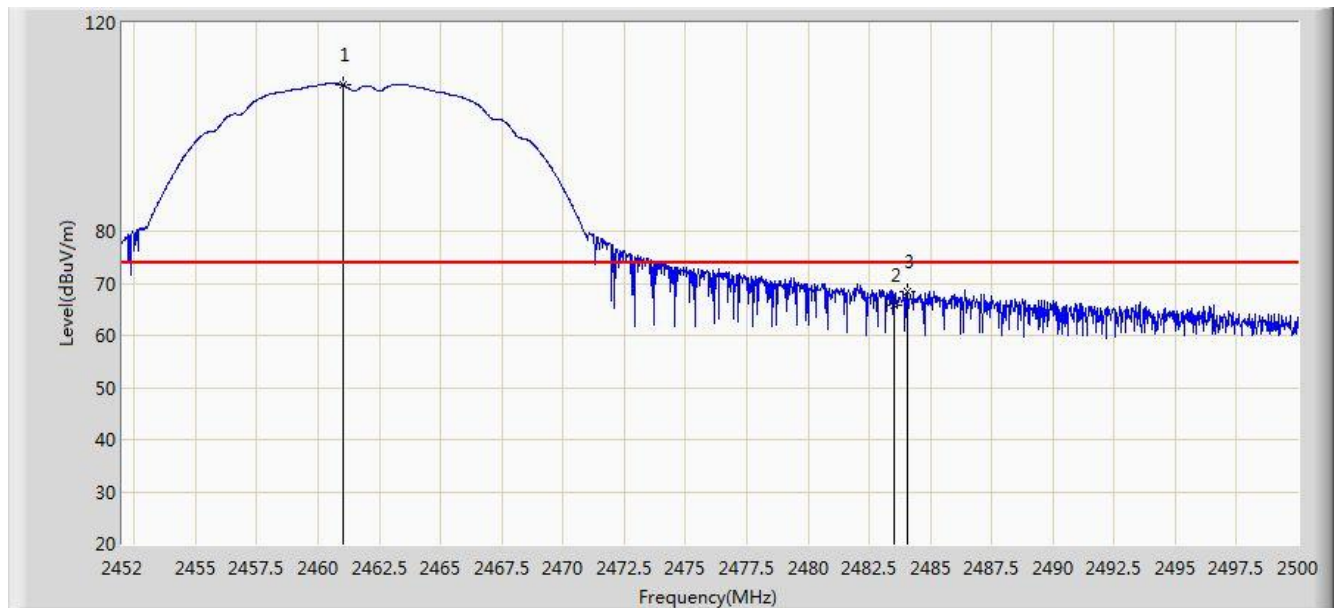


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.000	108.119	77.509	N/A	N/A	30.609	PK
2			2483.500	65.871	35.198	-8.129	74.000	30.673	PK
3			2484.040	68.483	37.809	-5.517	74.000	30.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 0	

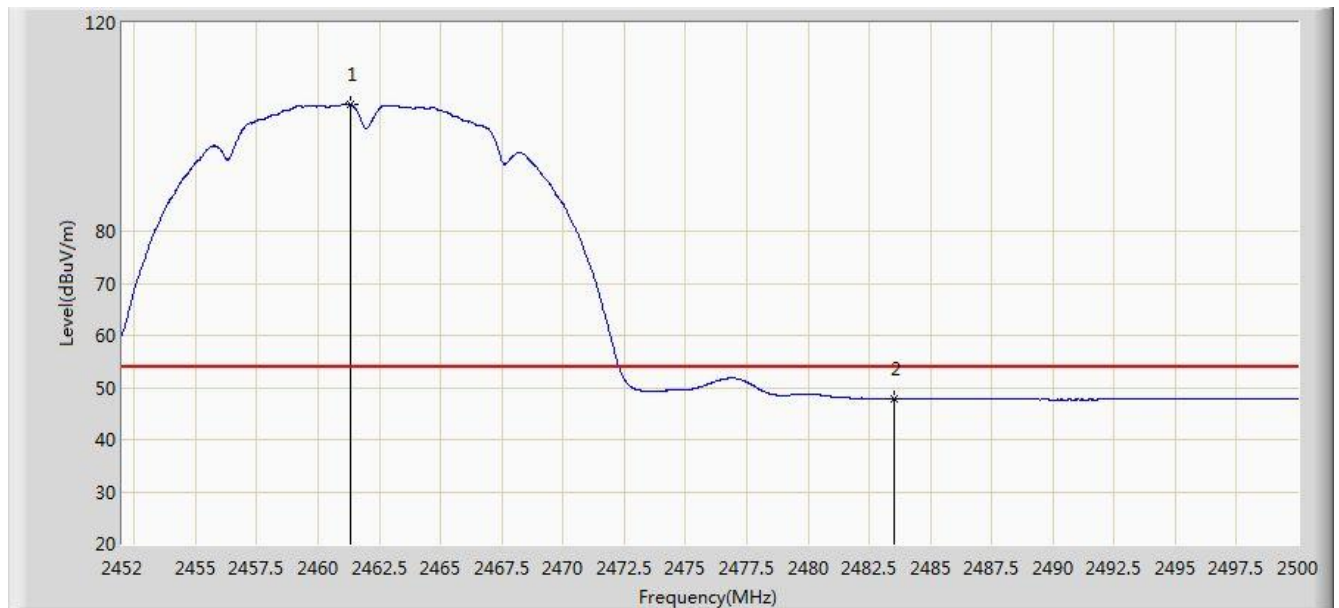


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	104.352	73.742	N/A	N/A	30.611	AV
2			2483.500	47.843	17.170	-6.157	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2412MHz Ant 1	

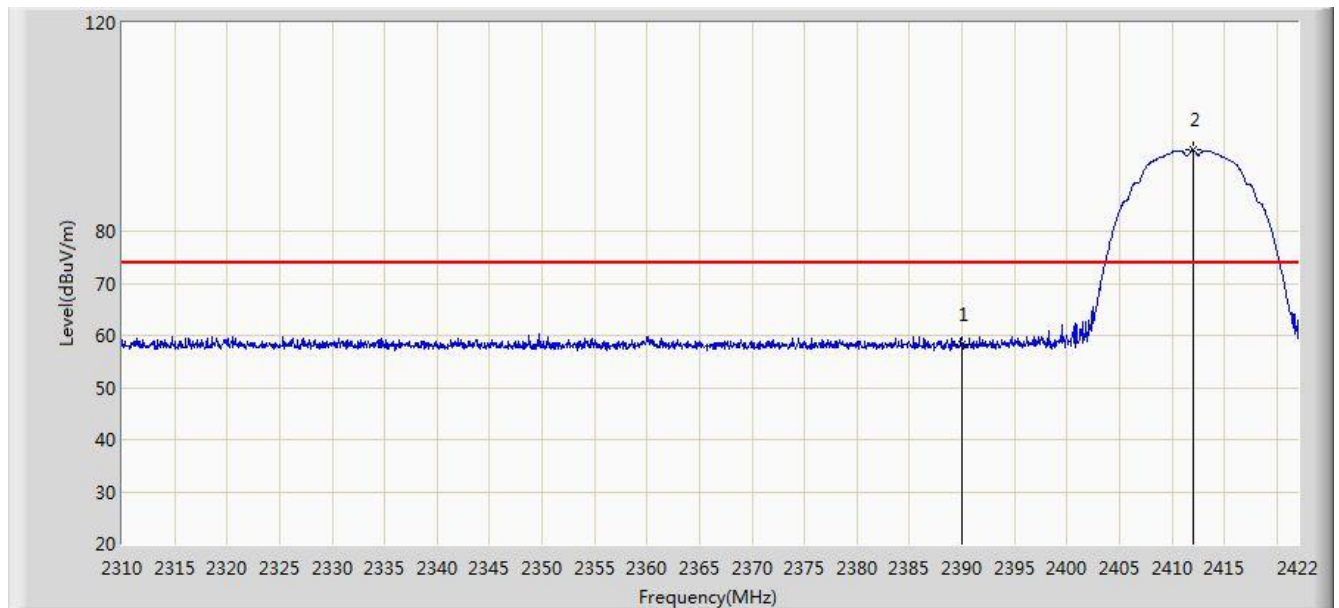


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.123	27.439	-15.877	74.000	30.684	PK
2		*	2411.976	95.625	64.980	N/A	N/A	30.645	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2412MHz Ant 1	

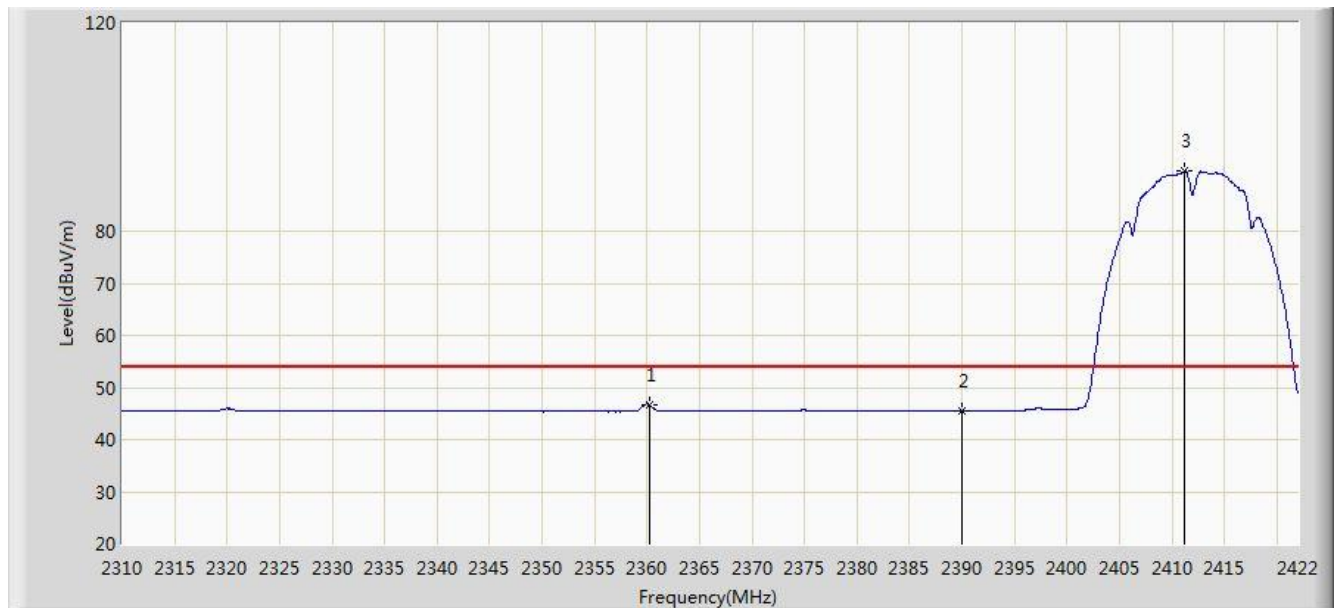


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.288	46.618	15.867	-7.382	54.000	30.751	AV
2			2390.000	45.461	14.777	-8.539	54.000	30.684	AV
3		*	2411.136	91.505	60.859	N/A	N/A	30.646	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2412MHz Ant 1	

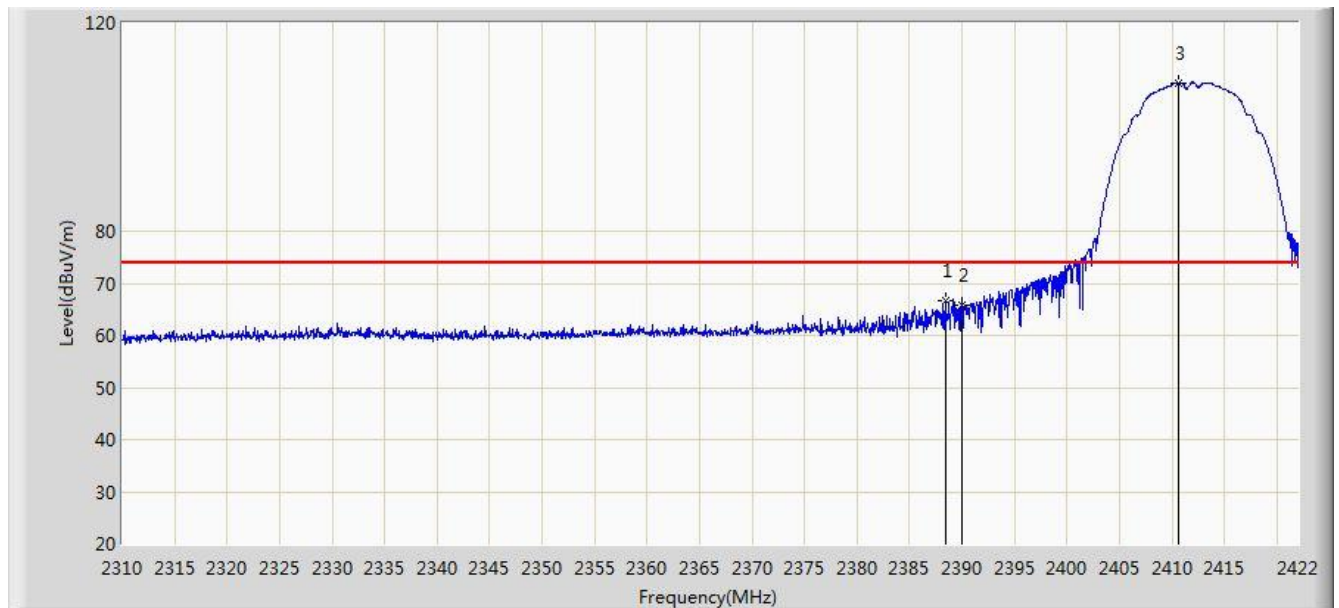


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.456	66.757	36.070	-7.243	74.000	30.687	PK
2			2390.000	65.779	35.095	-8.221	74.000	30.684	PK
3		*	2410.632	108.460	77.813	N/A	N/A	30.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2412MHz Ant 1	

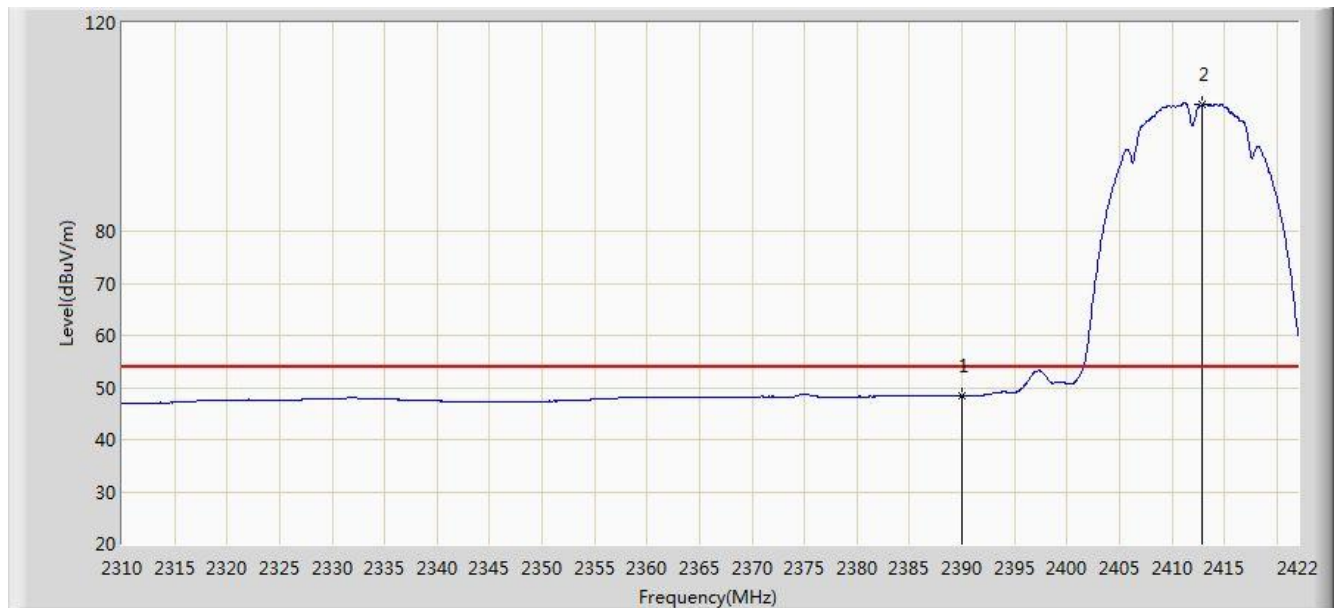


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.419	17.735	-5.581	54.000	30.684	AV
2		*	2412.872	104.432	73.789	N/A	N/A	30.644	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 1	

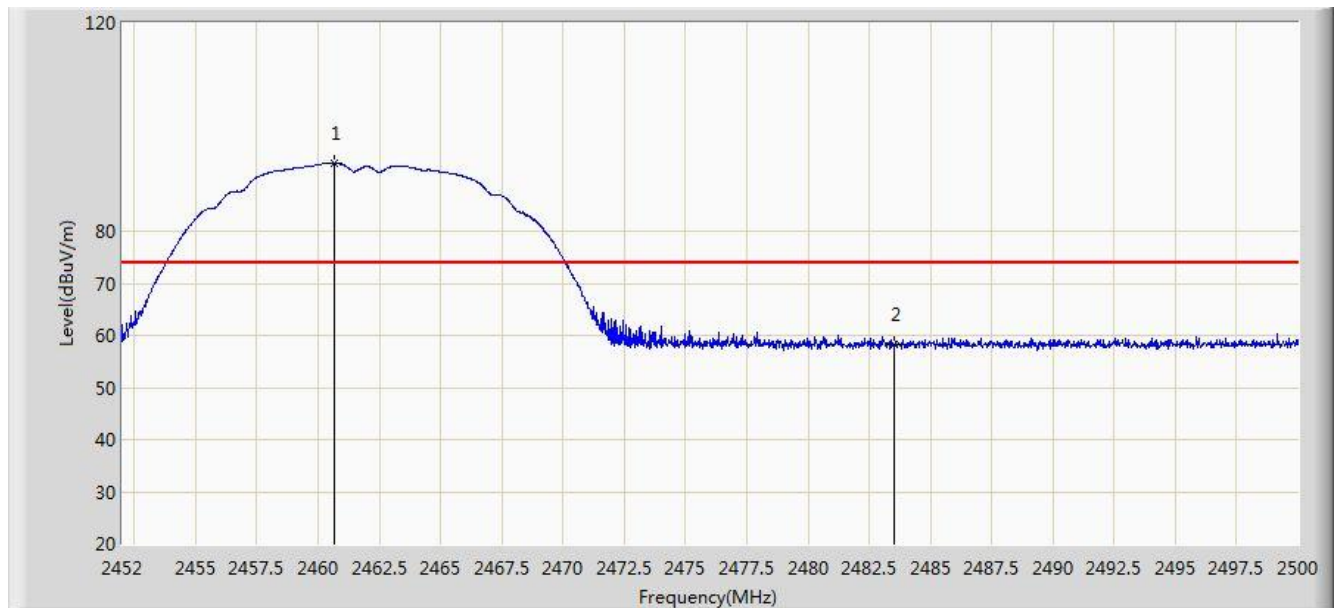

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.640	93.001	62.392	N/A	N/A	30.609	PK
2			2483.500	58.297	27.624	-15.703	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.168	89.197	58.587	N/A	N/A	30.611	AV
2			2483.500	45.621	14.948	-8.379	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 1	

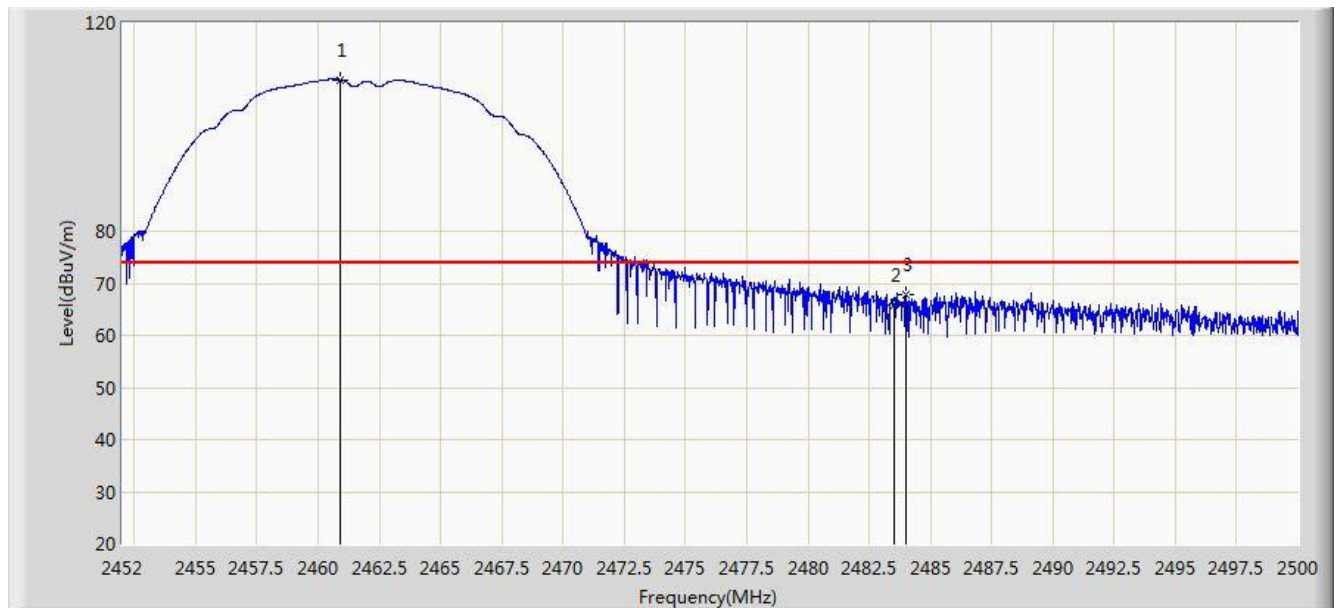

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.928	109.064	78.454	N/A	N/A	30.609	PK
2			2483.500	65.684	35.011	-8.316	74.000	30.673	PK
3			2483.992	67.708	37.034	-6.292	74.000	30.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1: Transmit by 802.11b at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	105.323	74.713	N/A	N/A	30.611	AV
2			2483.500	47.866	17.193	-6.134	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 0	

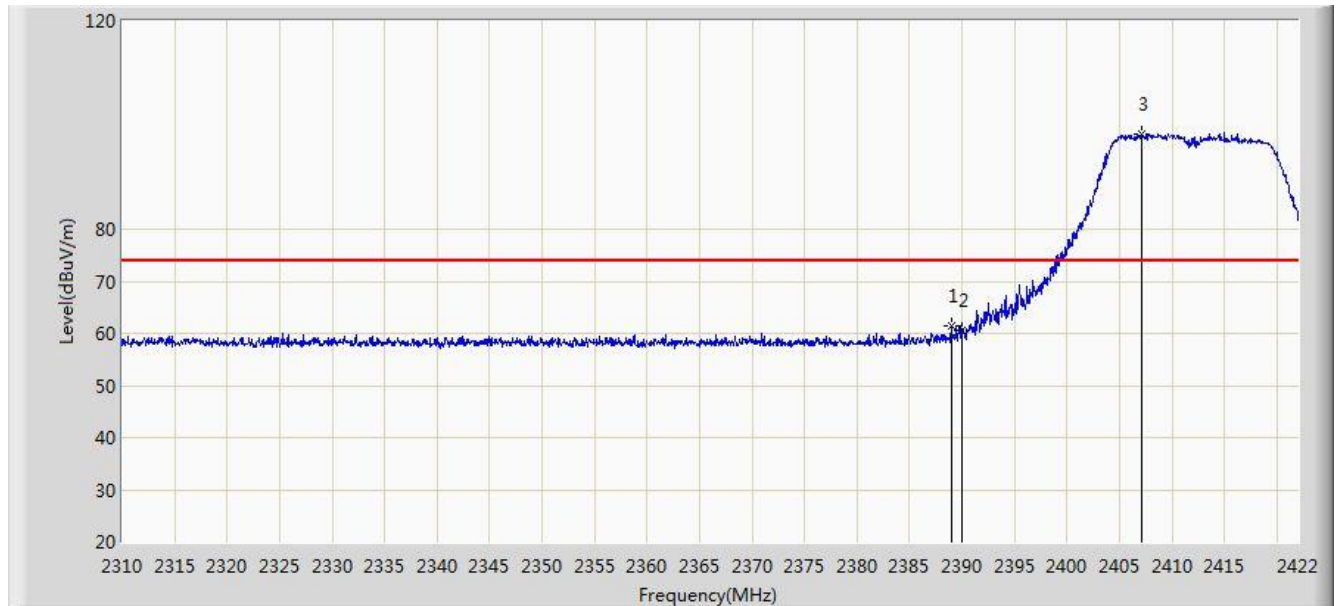


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	61.440	30.754	-12.560	74.000	30.686	PK
2			2390.000	60.603	29.919	-13.397	74.000	30.684	PK
3		*	2407.104	98.131	67.478	N/A	N/A	30.653	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 0	

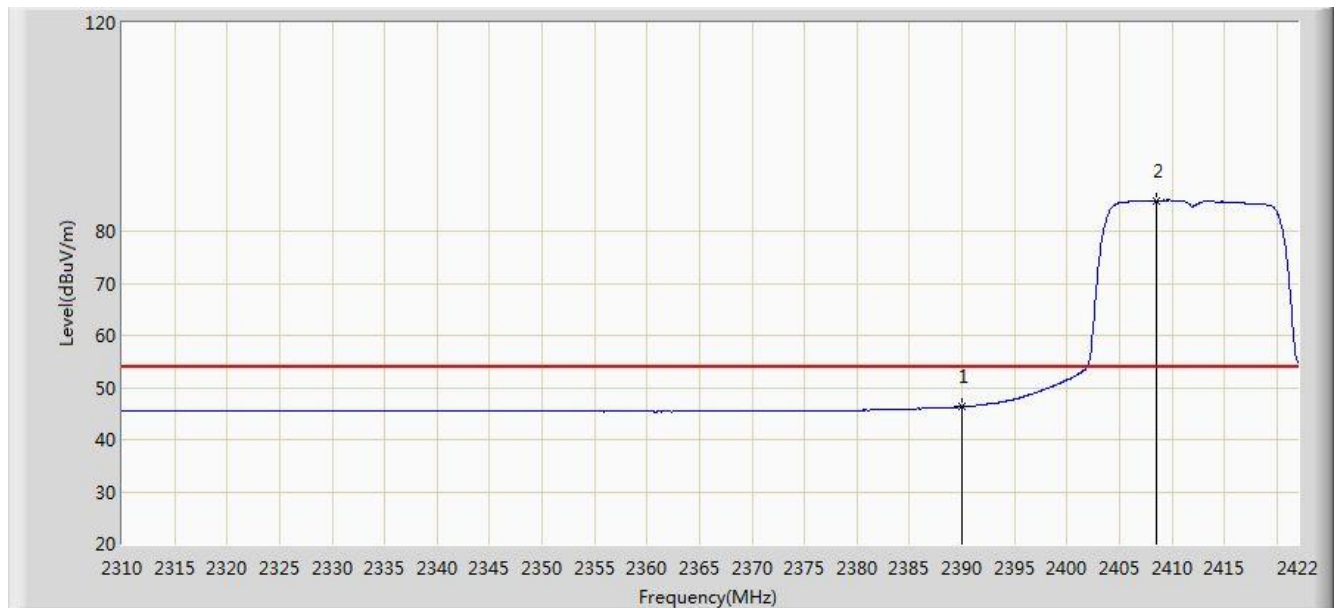


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.334	15.650	-7.666	54.000	30.684	AV
2		*	2408.504	85.915	55.265	N/A	N/A	30.650	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 0	

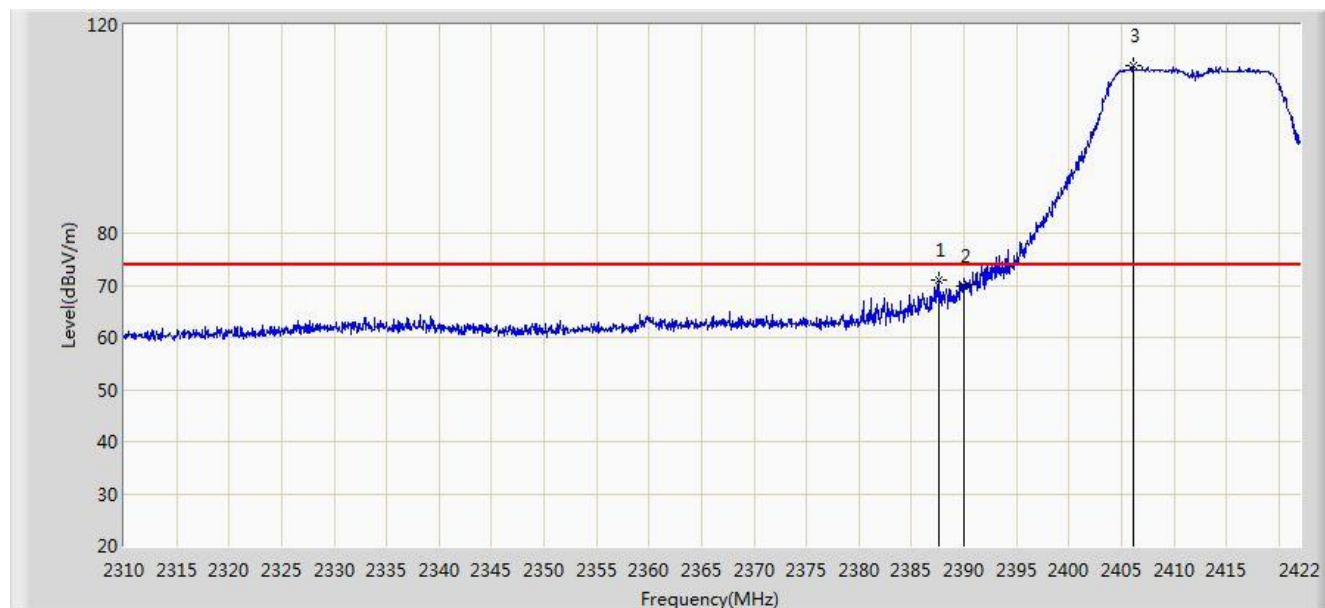


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.672	70.914	40.225	-3.086	74.000	30.689	PK
2			2390.000	69.718	39.034	-4.282	74.000	30.684	PK
3		*	2406.096	112.186	81.532	N/A	N/A	30.654	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 0	

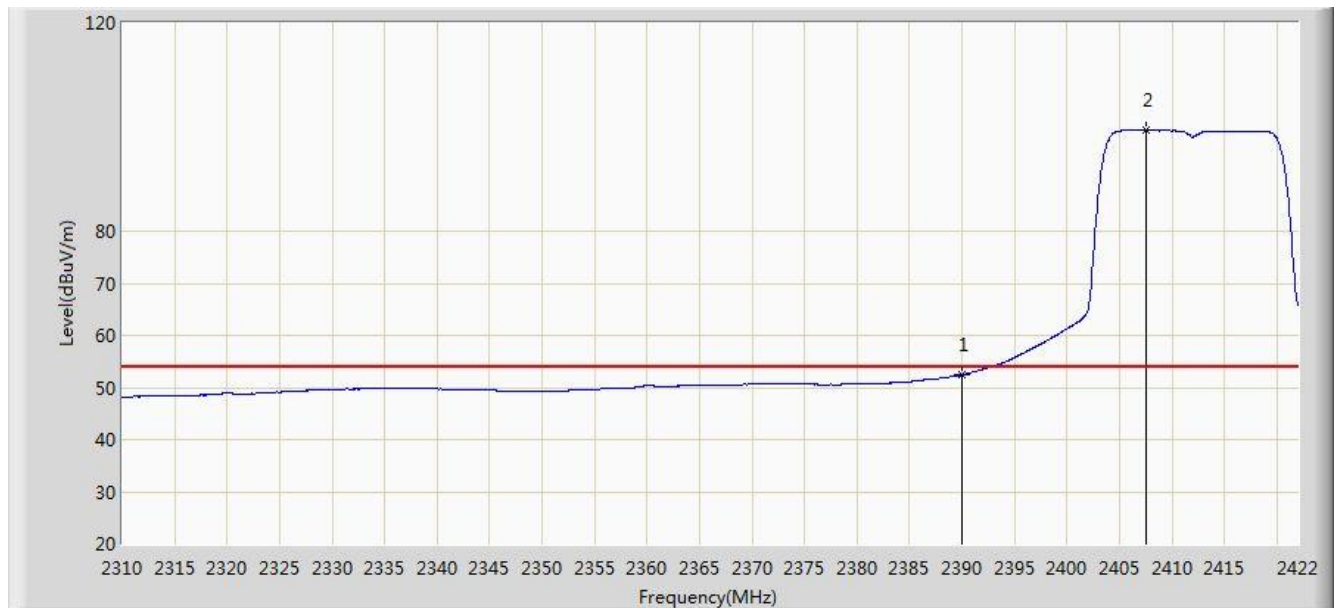


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.459	21.775	-1.541	54.000	30.684	AV
2		*	2407.496	99.392	68.740	N/A	N/A	30.652	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 0	

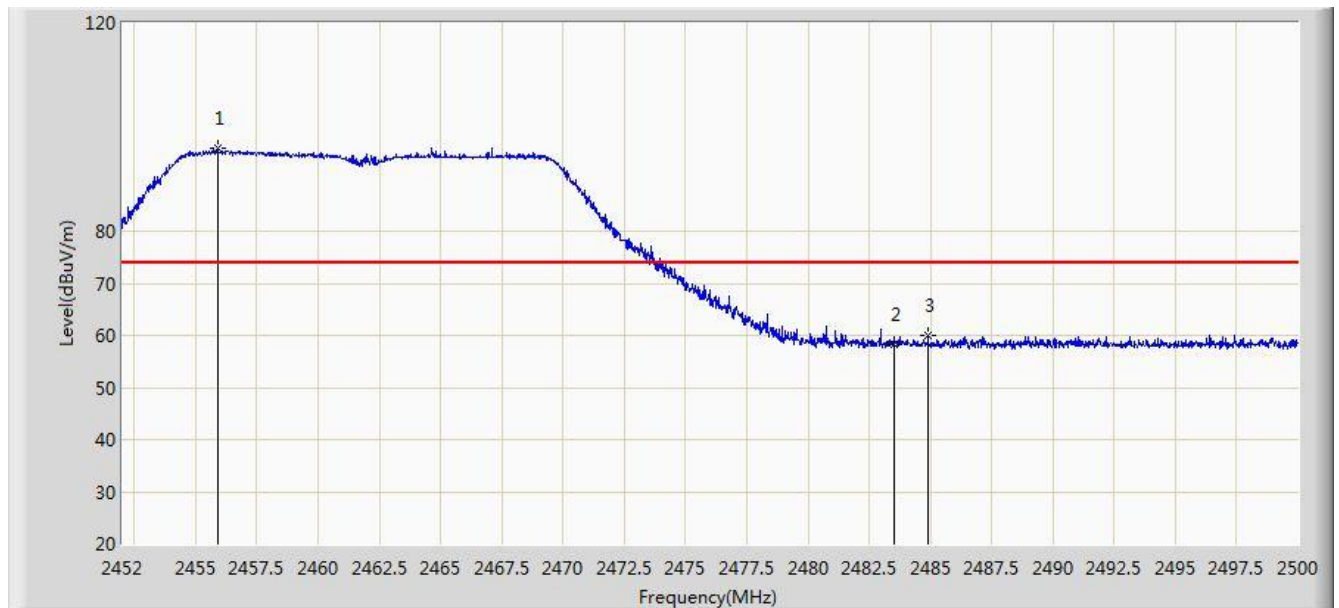


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.912	95.866	65.264	N/A	N/A	30.602	PK
2			2483.500	58.376	27.703	-15.624	74.000	30.673	PK
3			2484.904	59.977	29.300	-14.023	74.000	30.677	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 20:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 0	

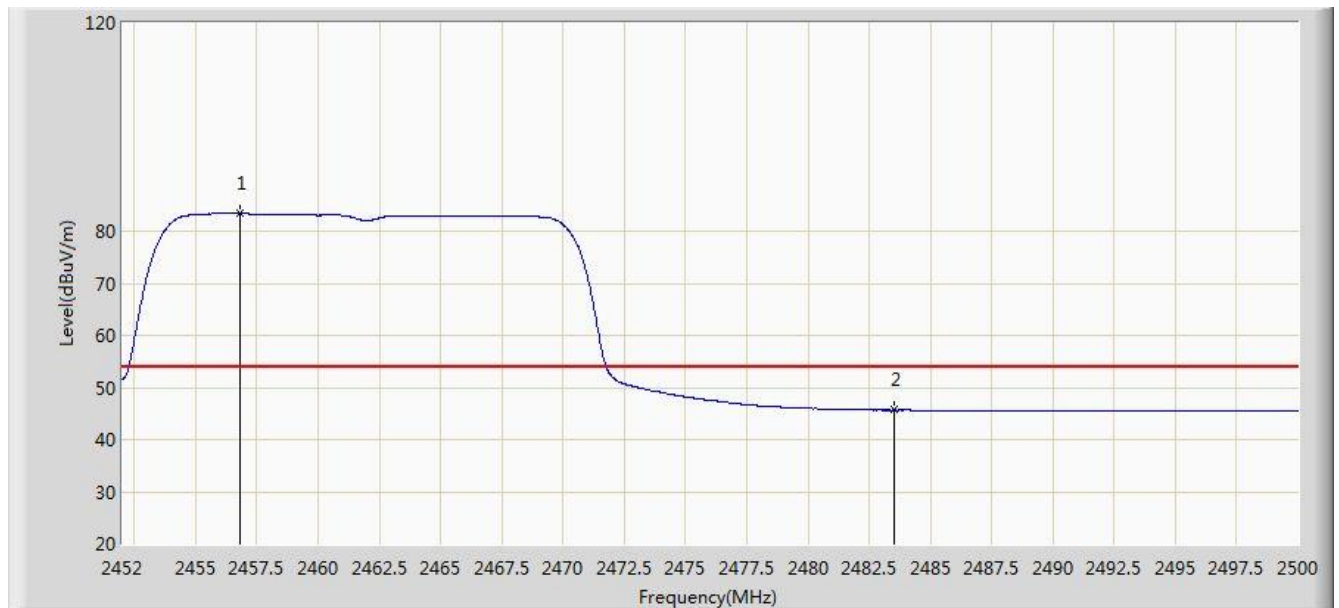


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.824	83.361	52.757	N/A	N/A	30.604	AV
2			2483.500	45.679	15.006	-8.321	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 0	

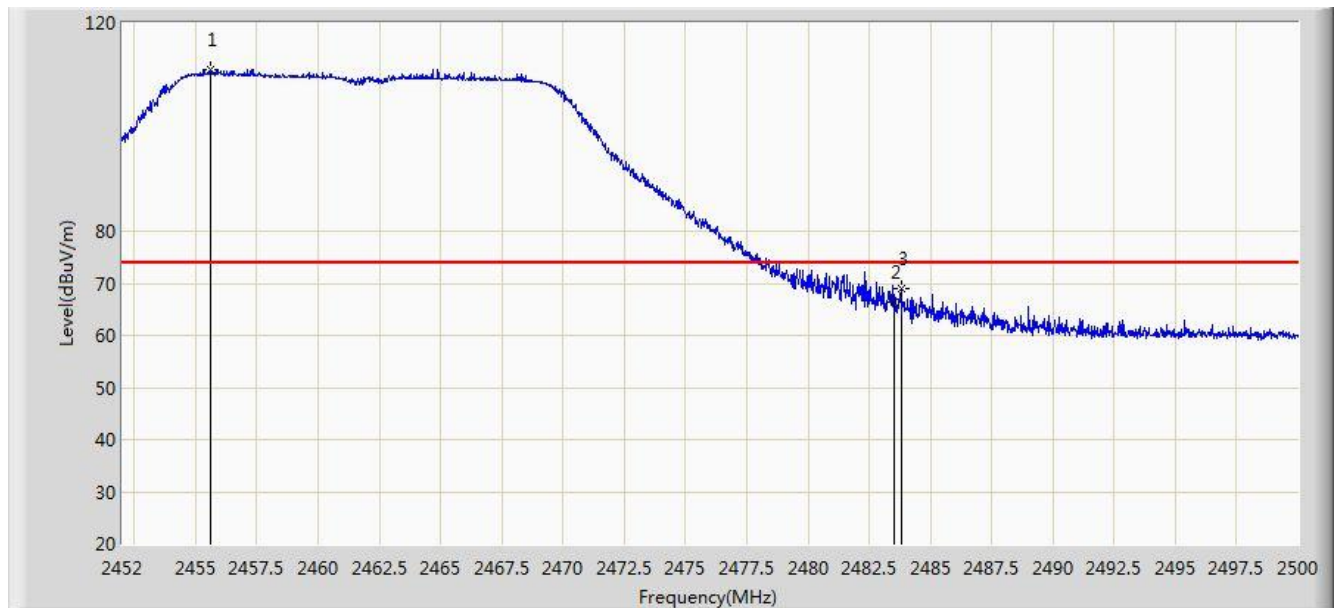


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.624	110.994	80.392	N/A	N/A	30.602	PK
2			2483.500	66.443	35.770	-7.557	74.000	30.673	PK
3			2483.800	69.075	38.401	-4.925	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 0	

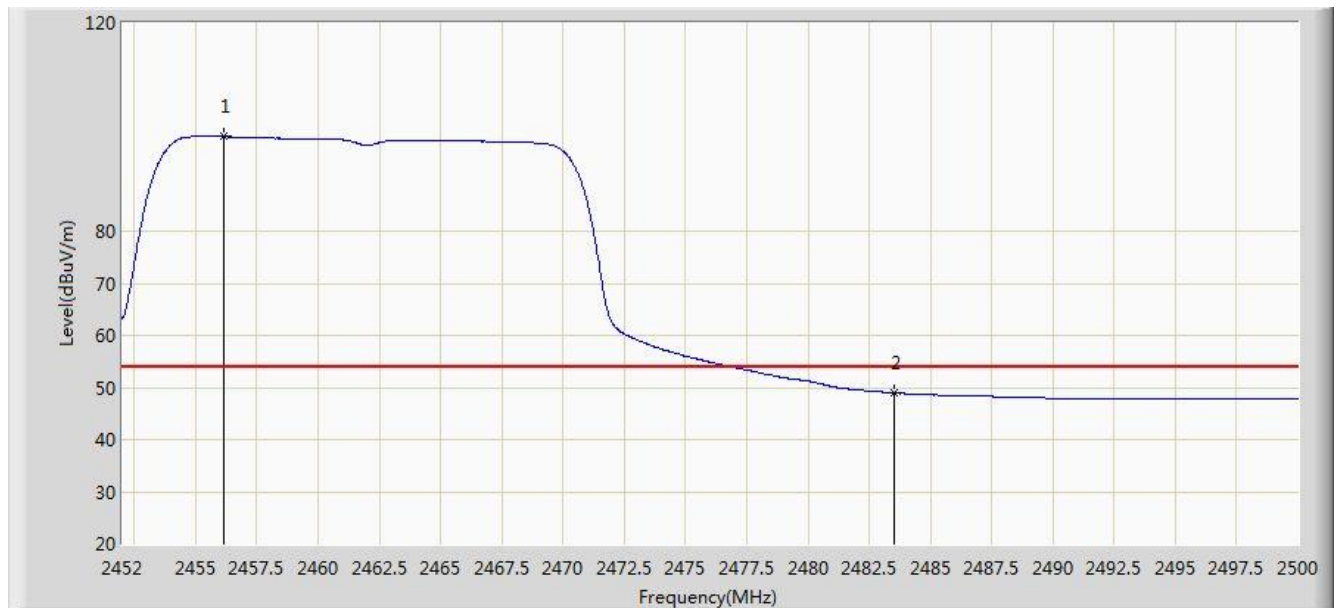


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.152	98.136	67.533	N/A	N/A	30.603	AV
2			2483.500	48.941	18.268	-5.059	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 1	

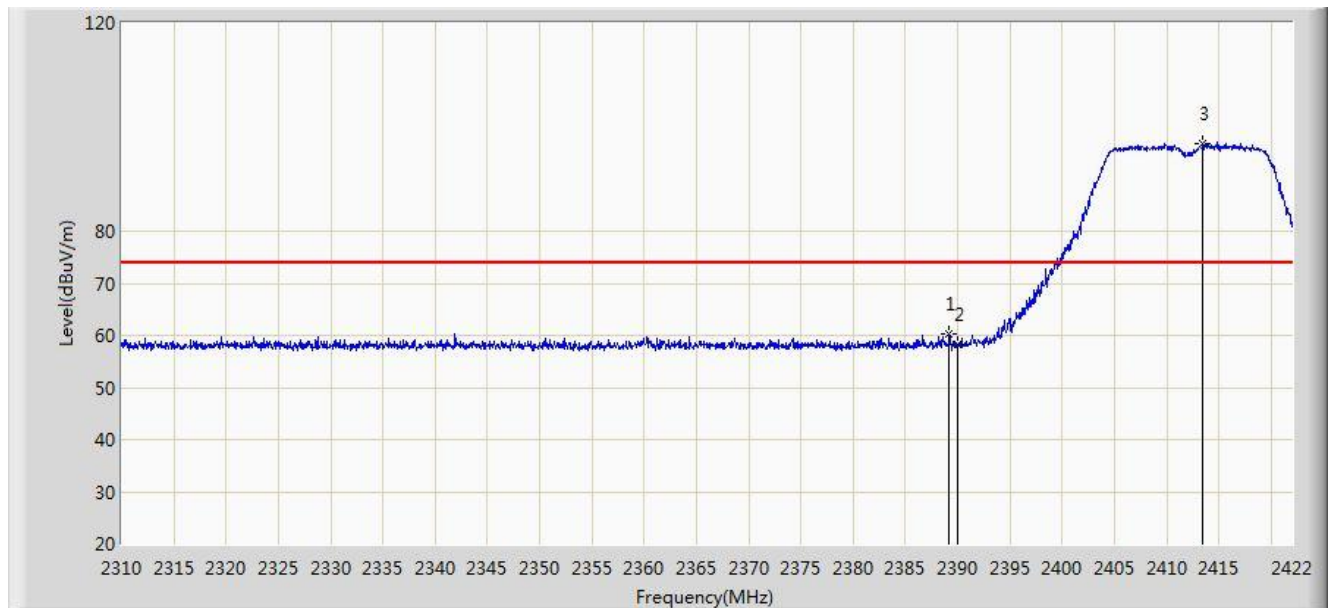


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.184	60.277	29.591	-13.723	74.000	30.686	PK
2			2390.000	58.248	27.564	-15.752	74.000	30.684	PK
3		*	2413.488	96.948	66.306	N/A	N/A	30.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 1	

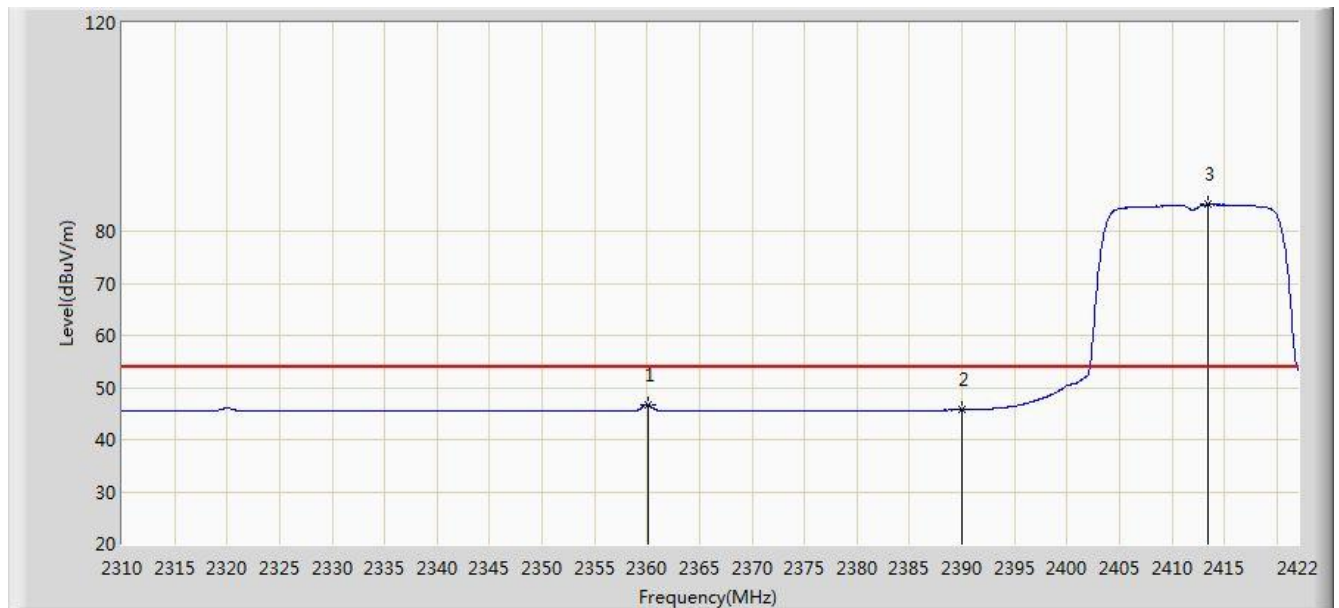


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.120	46.636	15.885	-7.364	54.000	30.751	AV
2			2390.000	45.736	15.052	-8.264	54.000	30.684	AV
3		*	2413.432	85.082	54.439	N/A	N/A	30.643	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 1	

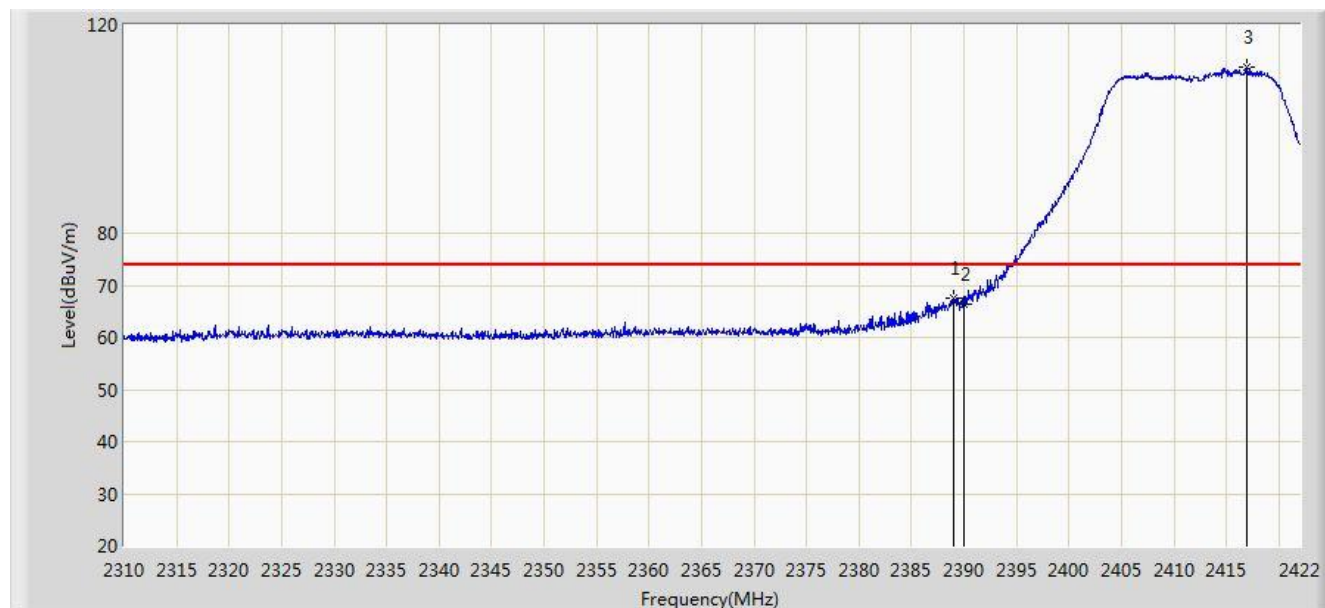


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	67.408	36.722	-6.592	74.000	30.686	PK
2			2390.000	66.499	35.815	-7.501	74.000	30.684	PK
3		*	2416.904	111.772	81.135	N/A	N/A	30.637	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2412MHz Ant 1	

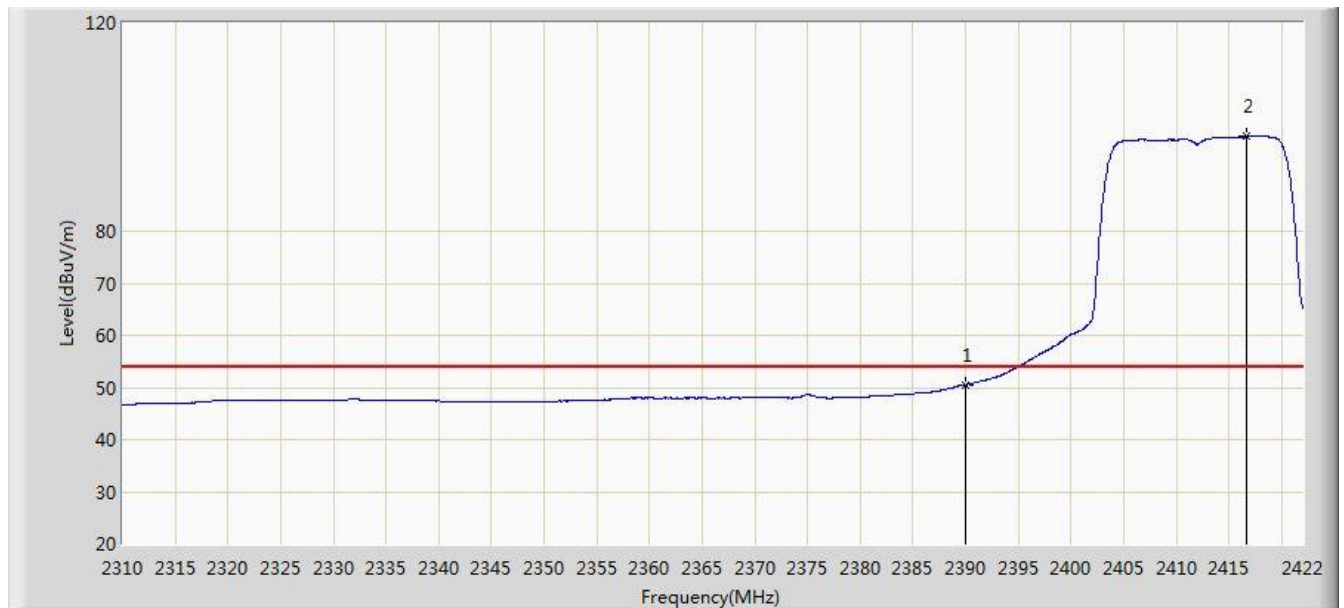


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.499	19.815	-3.501	54.000	30.684	AV
2		*	2416.736	98.128	67.491	N/A	N/A	30.638	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 1	

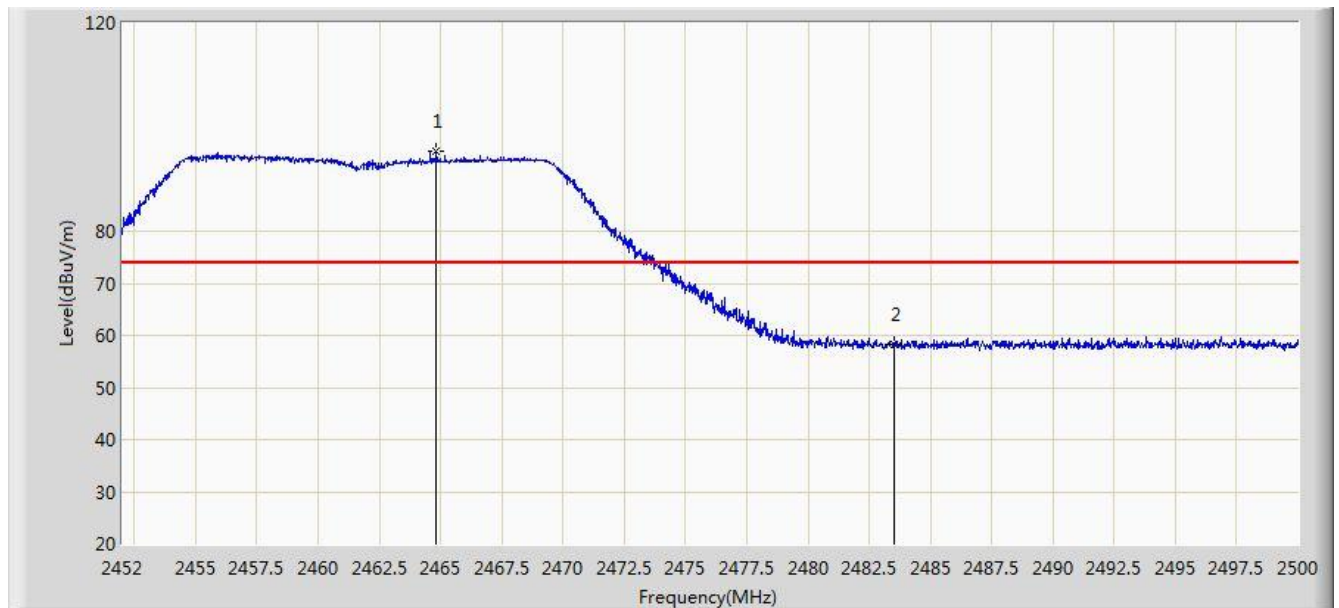


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.840	95.259	64.641	N/A	N/A	30.618	PK
2			2483.500	58.394	27.721	-15.606	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 1	

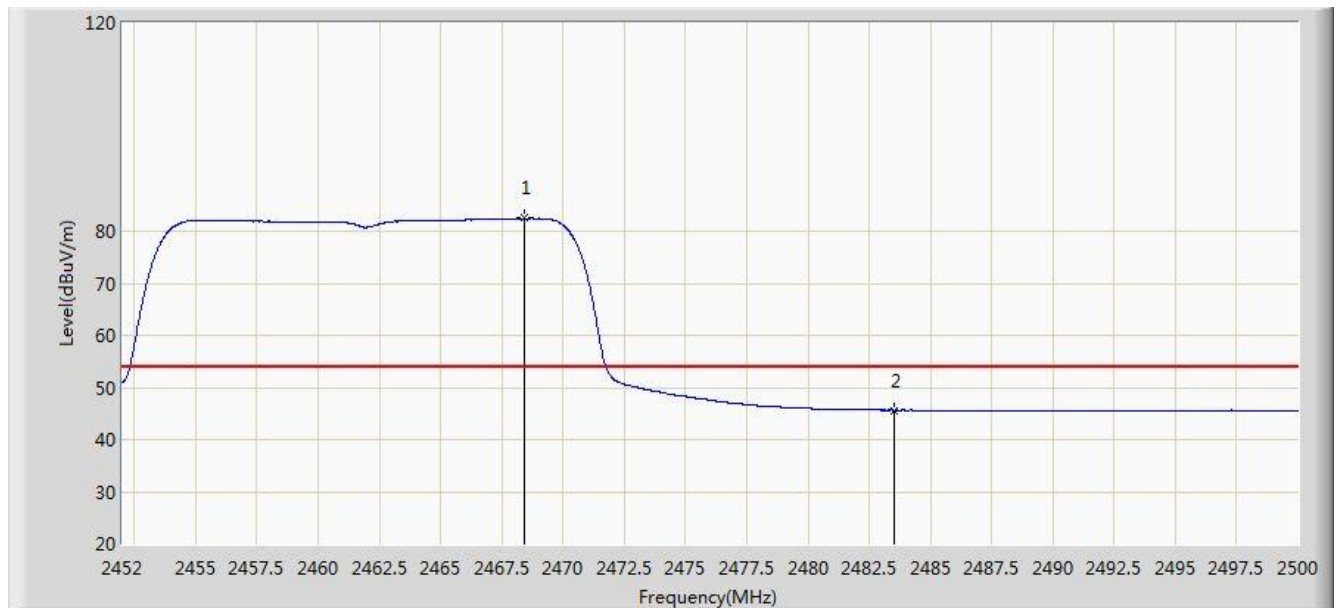


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.392	82.465	51.837	N/A	N/A	30.628	AV
2			2483.500	45.646	14.973	-8.354	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 1	

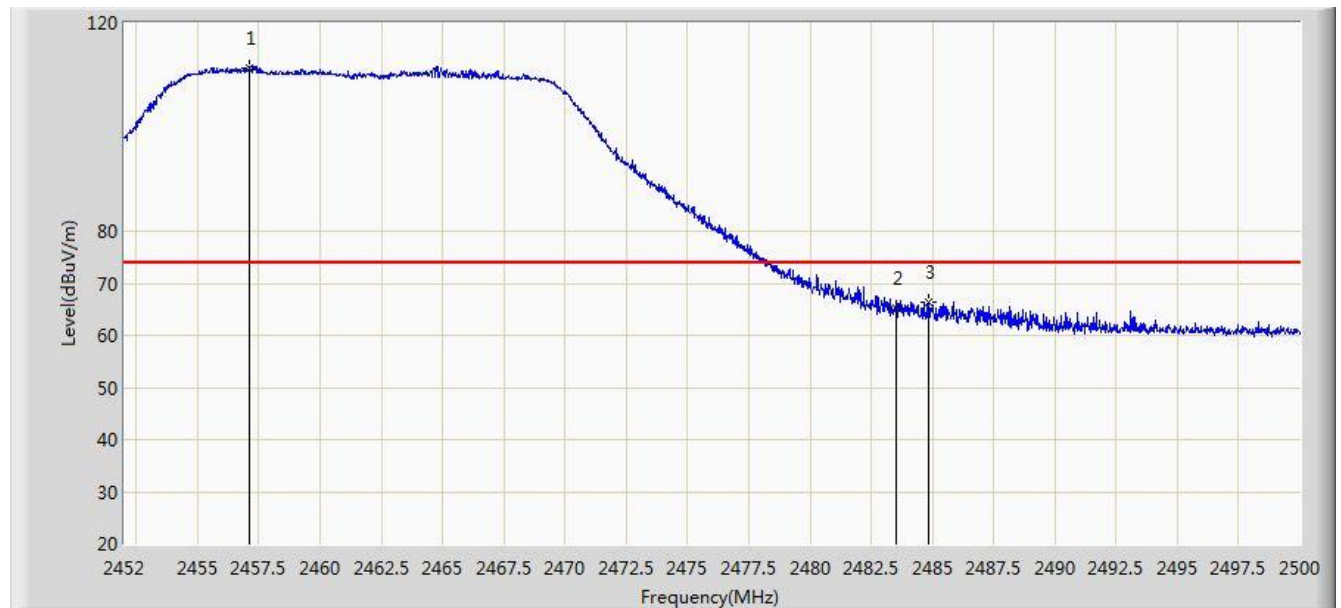


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.112	111.359	80.755	N/A	N/A	30.604	PK
2			2483.500	65.254	34.581	-8.746	74.000	30.673	PK
3			2484.856	66.461	35.784	-7.539	74.000	30.677	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 2: Transmit by 802.11g at channel 2462MHz Ant 1	

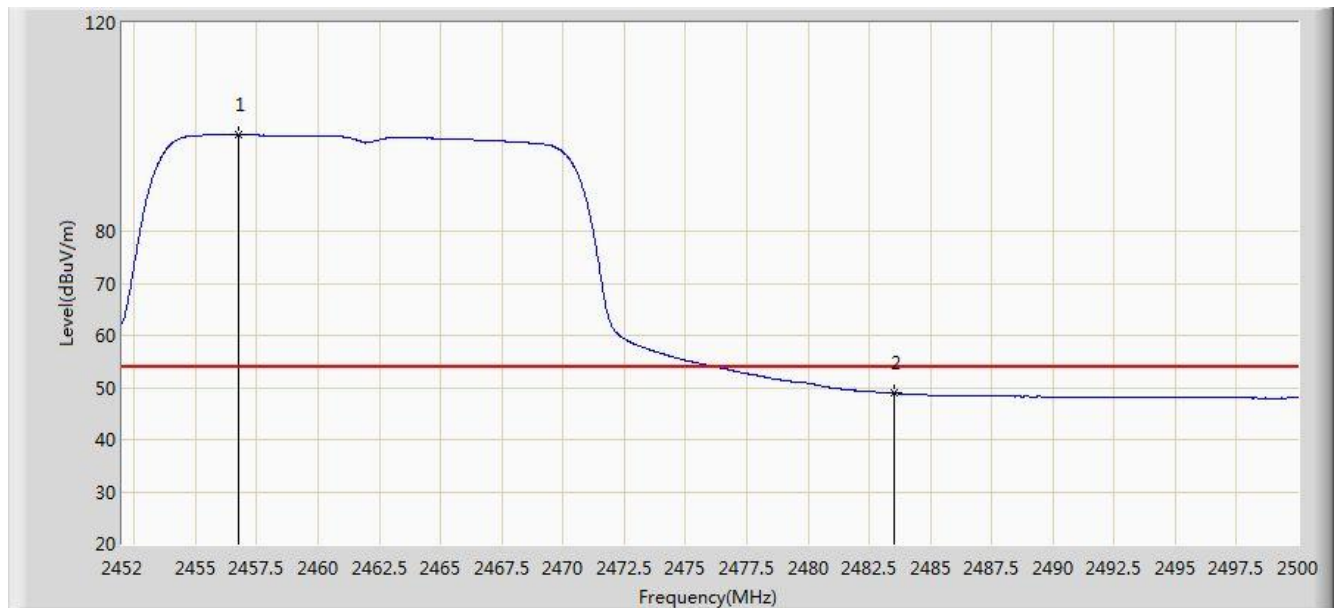


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	98.478	67.874	N/A	N/A	30.604	AV
2			2483.500	48.903	18.230	-5.097	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

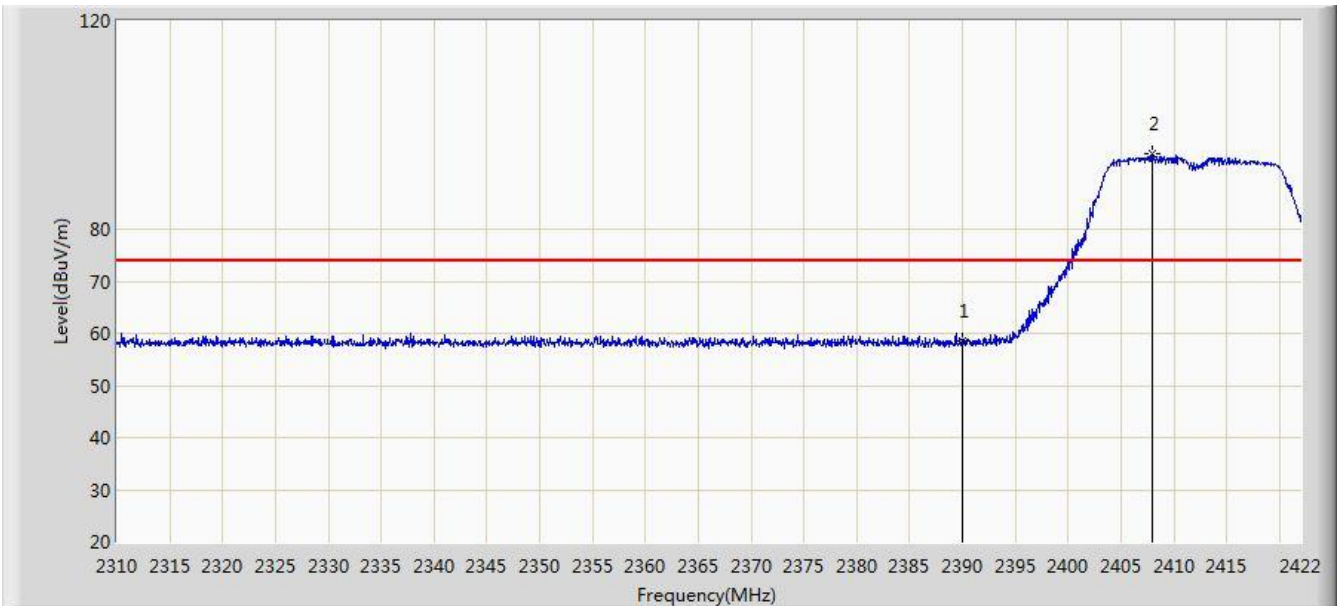


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	58.422	27.738	-15.578	74.000	30.684	PK
2		*	2407.944	94.370	63.719	N/A	N/A	30.651	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

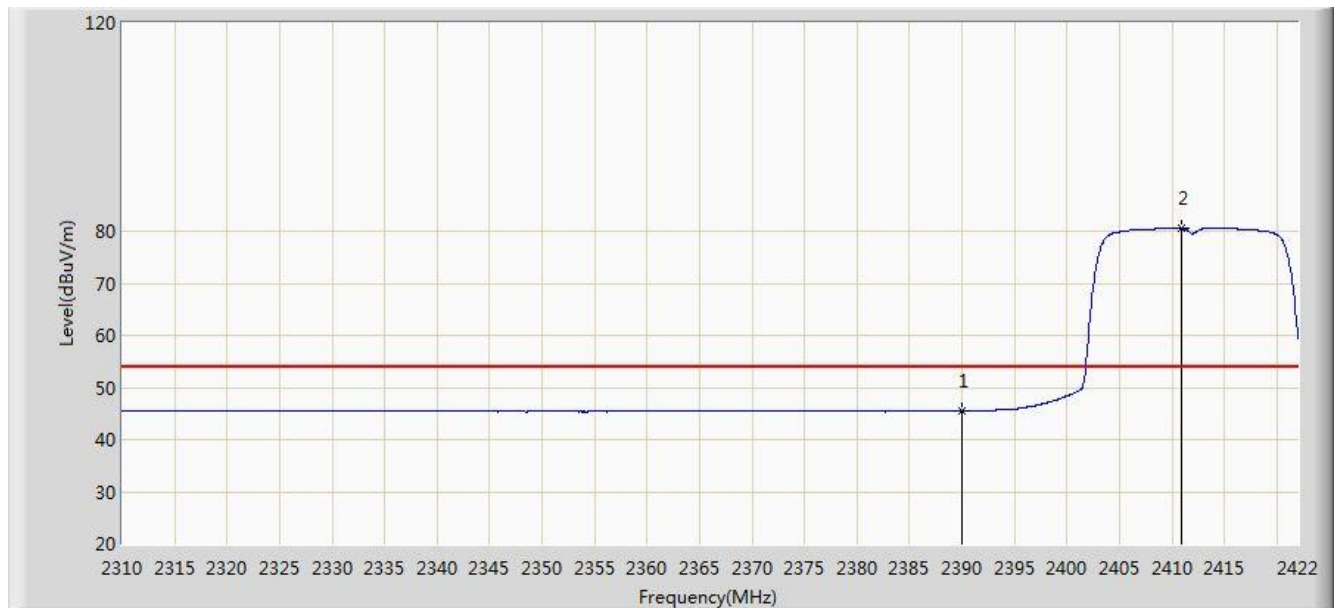


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.489	14.805	-8.511	54.000	30.684	AV
2		*	2410.968	80.588	49.942	N/A	N/A	30.646	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

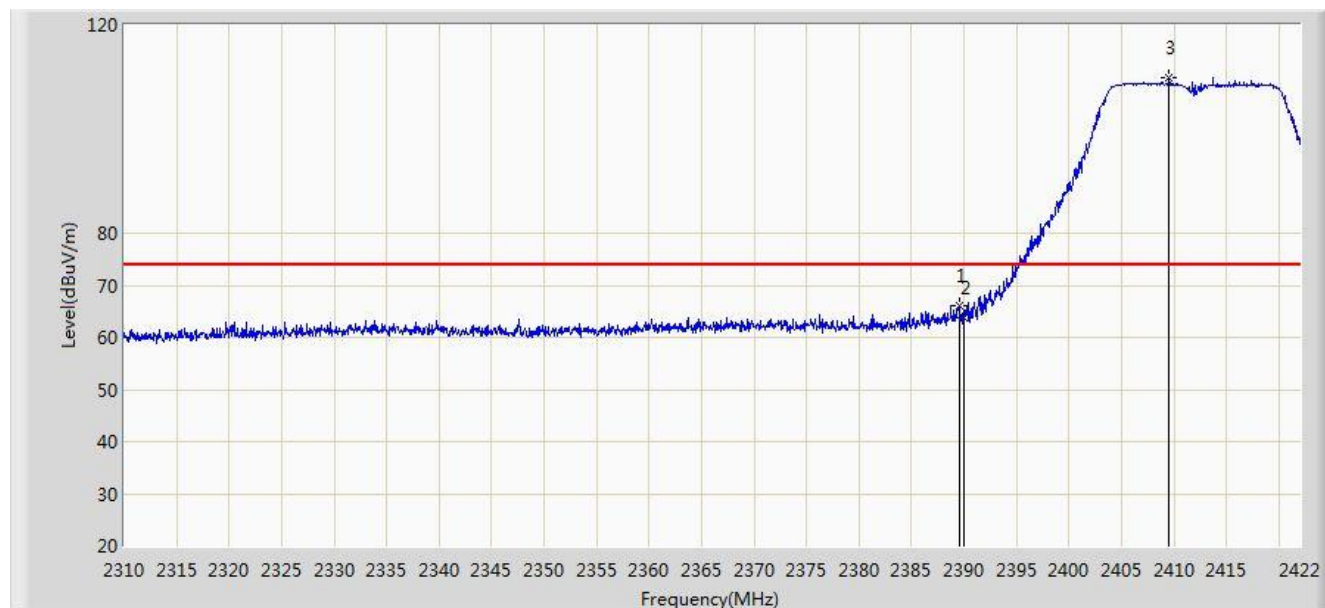


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	66.179	35.494	-7.821	74.000	30.685	PK
2			2390.000	63.808	33.124	-10.192	74.000	30.684	PK
3		*	2409.568	109.918	79.269	N/A	N/A	30.649	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0	

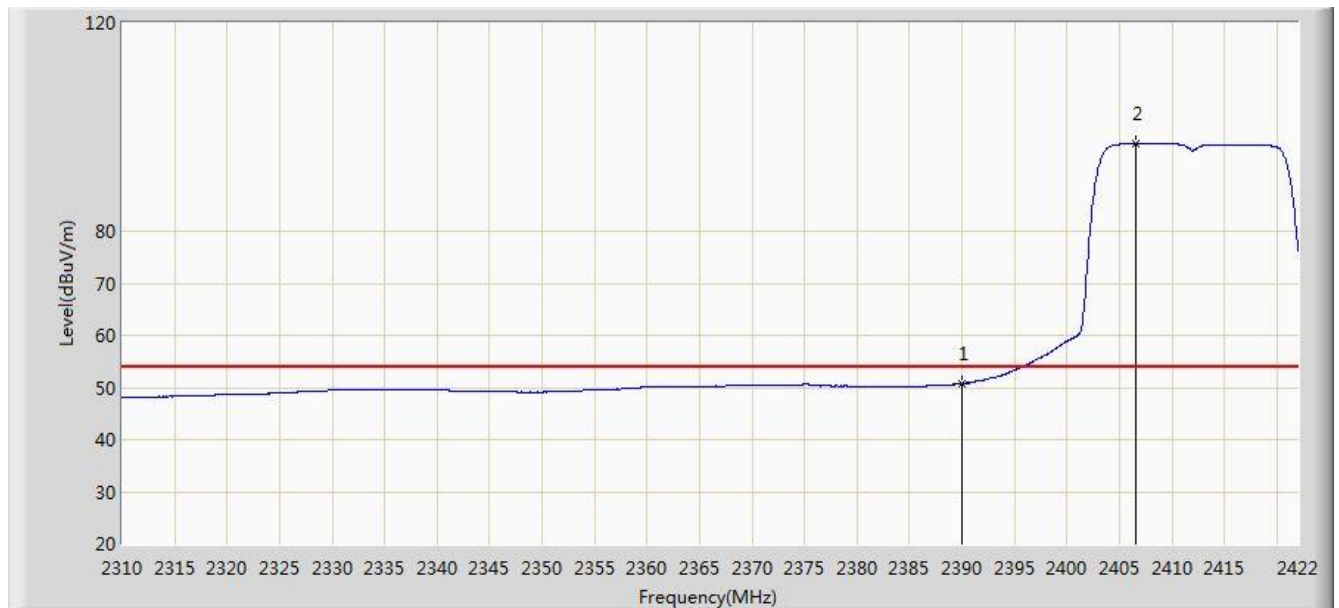


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.715	20.031	-3.285	54.000	30.684	AV
2		*	2406.600	96.865	66.211	N/A	N/A	30.653	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

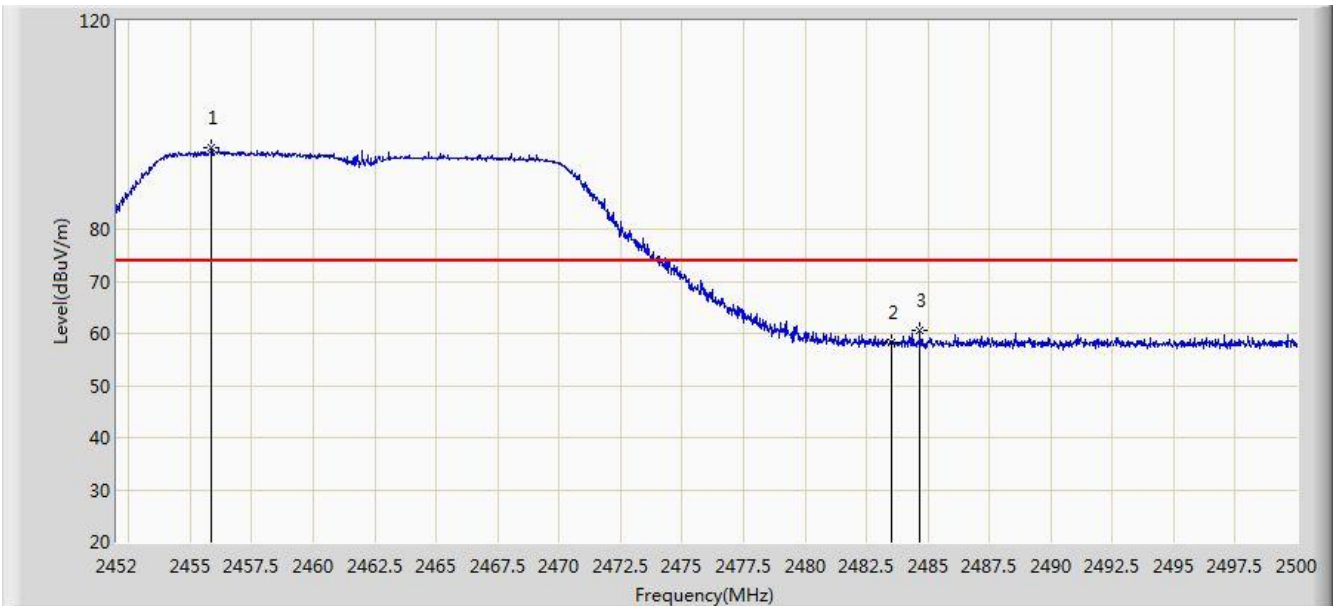


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.864	95.794	65.192	N/A	N/A	30.602	PK
2			2483.500	58.211	27.538	-15.789	74.000	30.673	PK
3			2484.688	60.502	29.826	-13.498	74.000	30.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

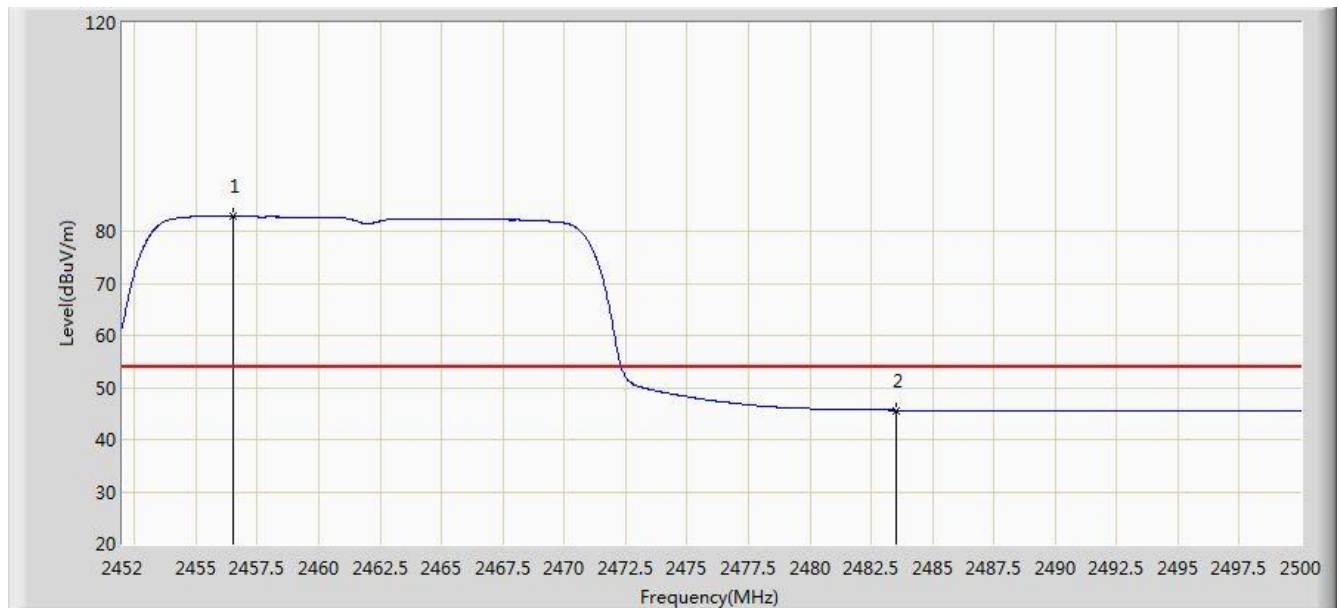


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.536	82.926	52.323	N/A	N/A	30.603	AV
2			2483.500	45.631	14.958	-8.369	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

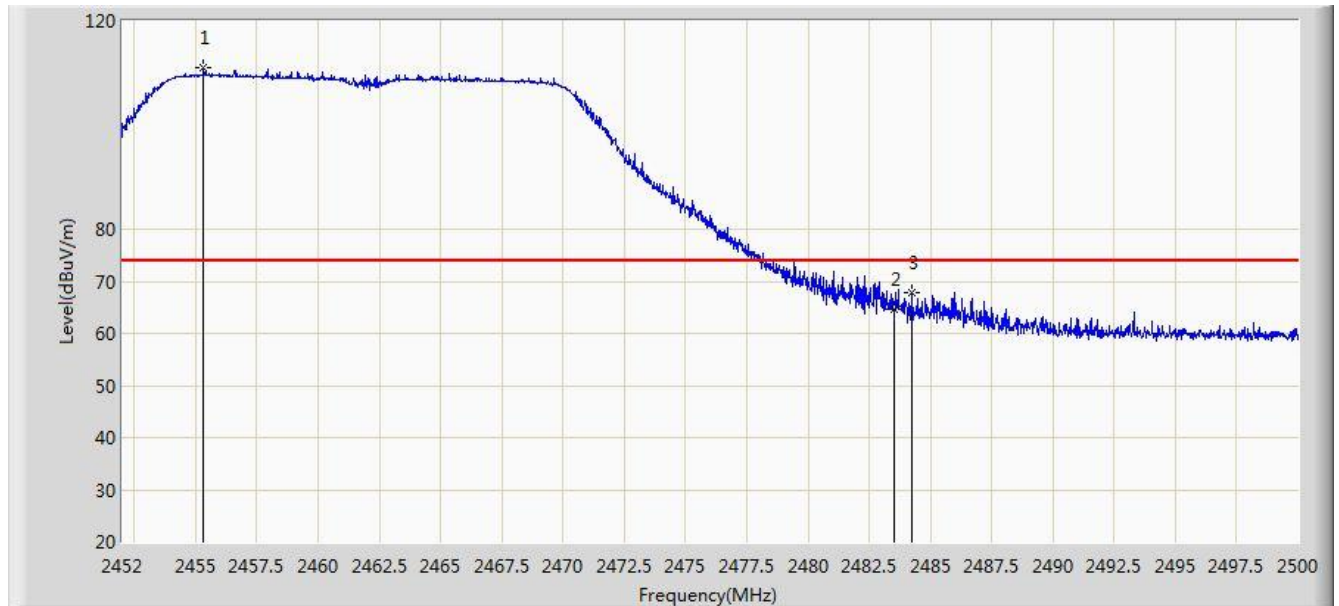


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.336	110.969	80.368	N/A	N/A	30.601	PK
2			2483.500	64.758	34.085	-9.242	74.000	30.673	PK
3			2484.232	67.761	37.086	-6.239	74.000	30.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0	

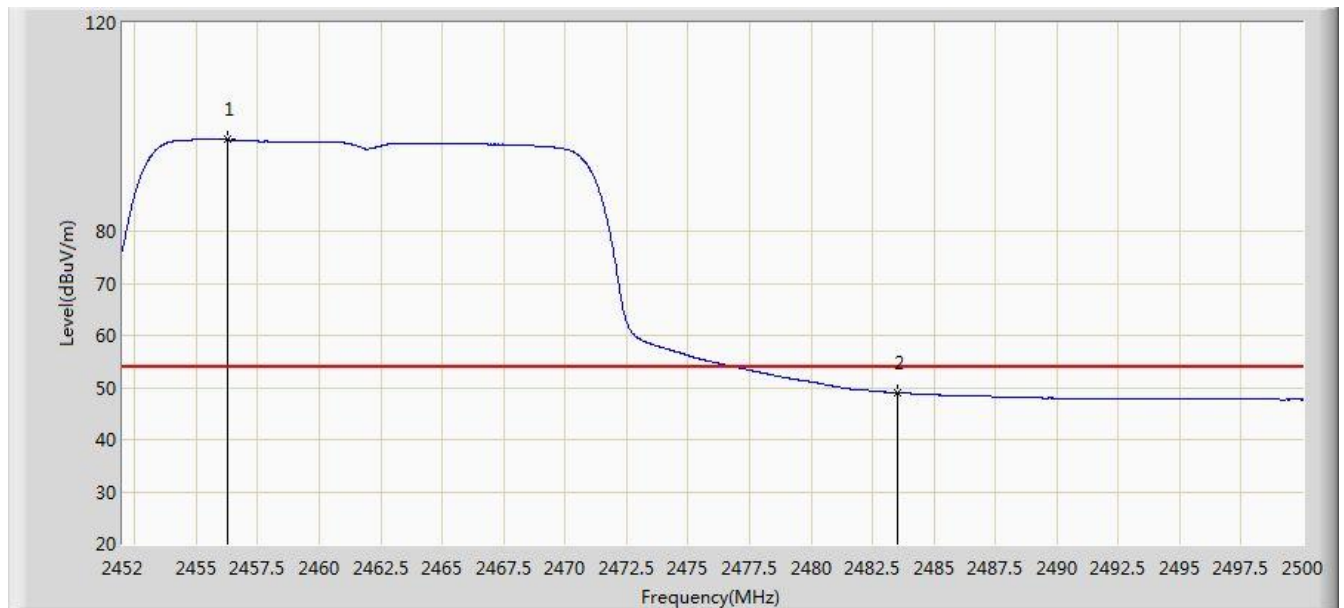


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.296	97.548	66.945	N/A	N/A	30.603	AV
2			2483.500	48.956	18.283	-5.044	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

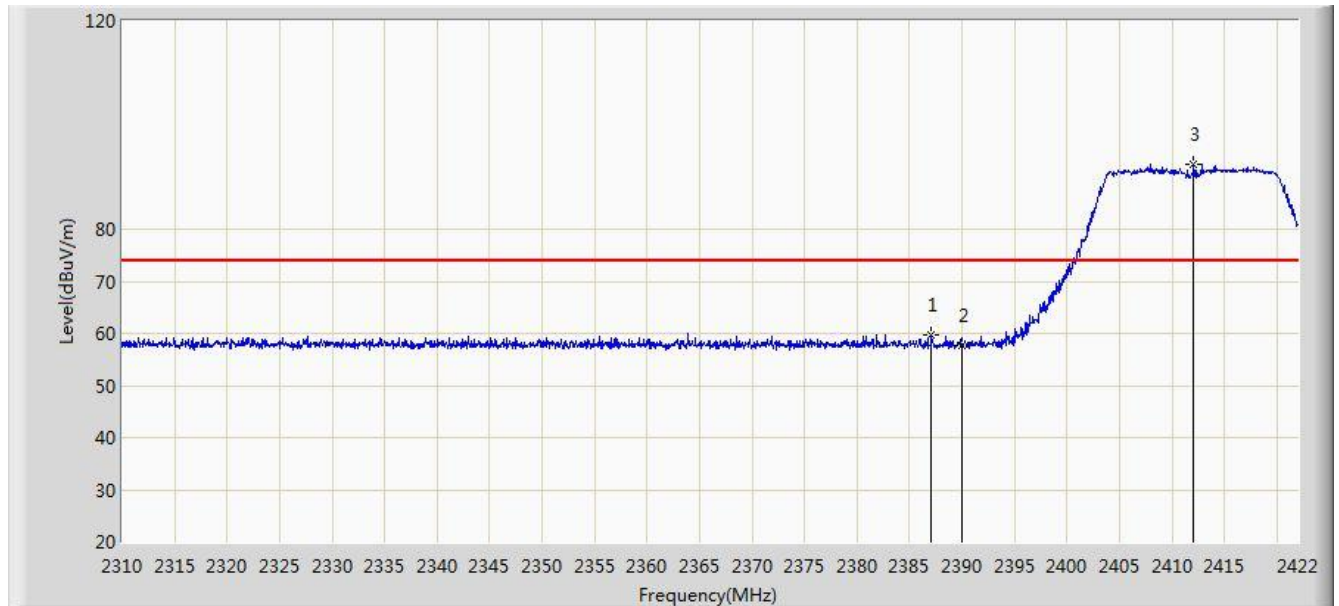


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.112	59.847	29.157	-14.153	74.000	30.690	PK
2			2390.000	57.573	26.889	-16.427	74.000	30.684	PK
3		*	2412.088	92.562	61.917	N/A	N/A	30.645	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

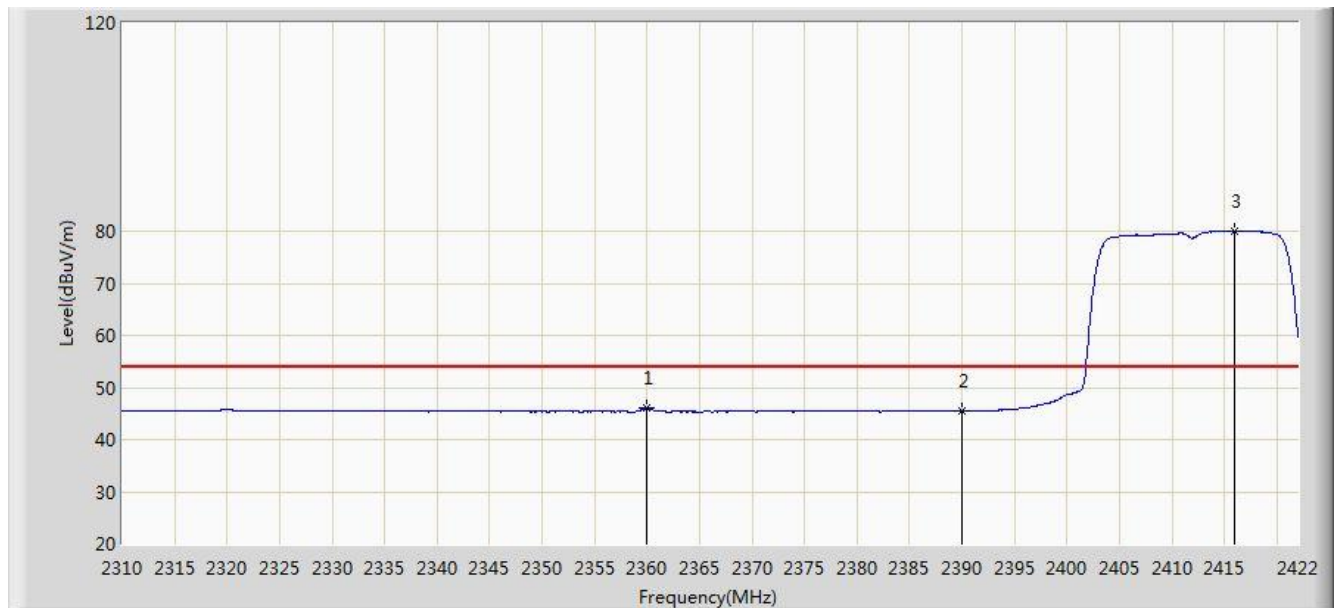


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2359.952	46.042	15.290	-7.958	54.000	30.752	AV
2			2390.000	45.512	14.828	-8.488	54.000	30.684	AV
3		*	2416.008	79.979	49.340	N/A	N/A	30.638	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

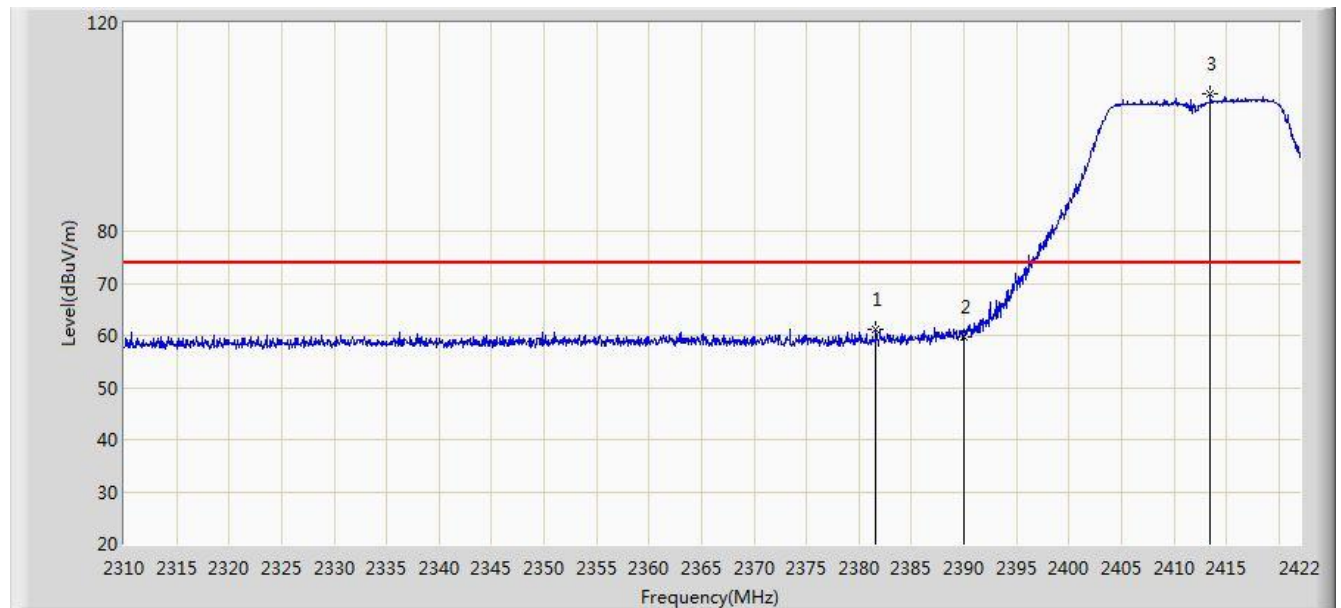


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.624	61.179	30.476	-12.821	74.000	30.703	PK
2			2390.000	59.832	29.148	-14.168	74.000	30.684	PK
3		*	2413.488	106.256	75.614	N/A	N/A	30.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 1	

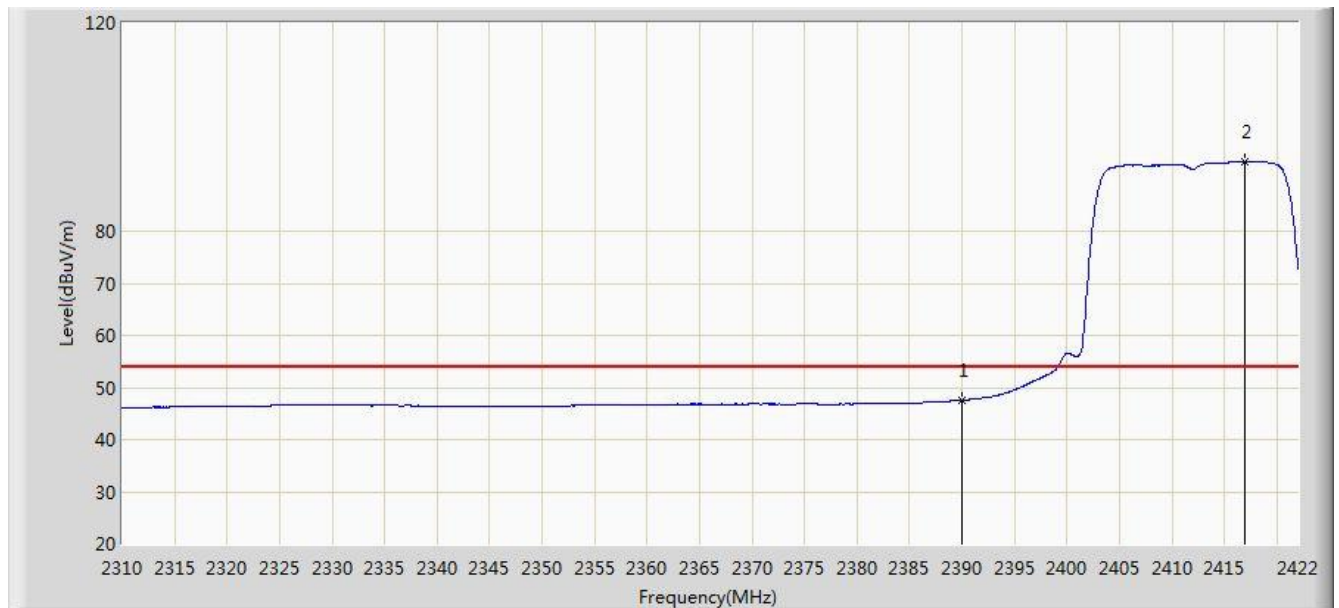


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.559	16.875	-6.441	54.000	30.684	AV
2		*	2416.904	93.300	62.663	N/A	N/A	30.637	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

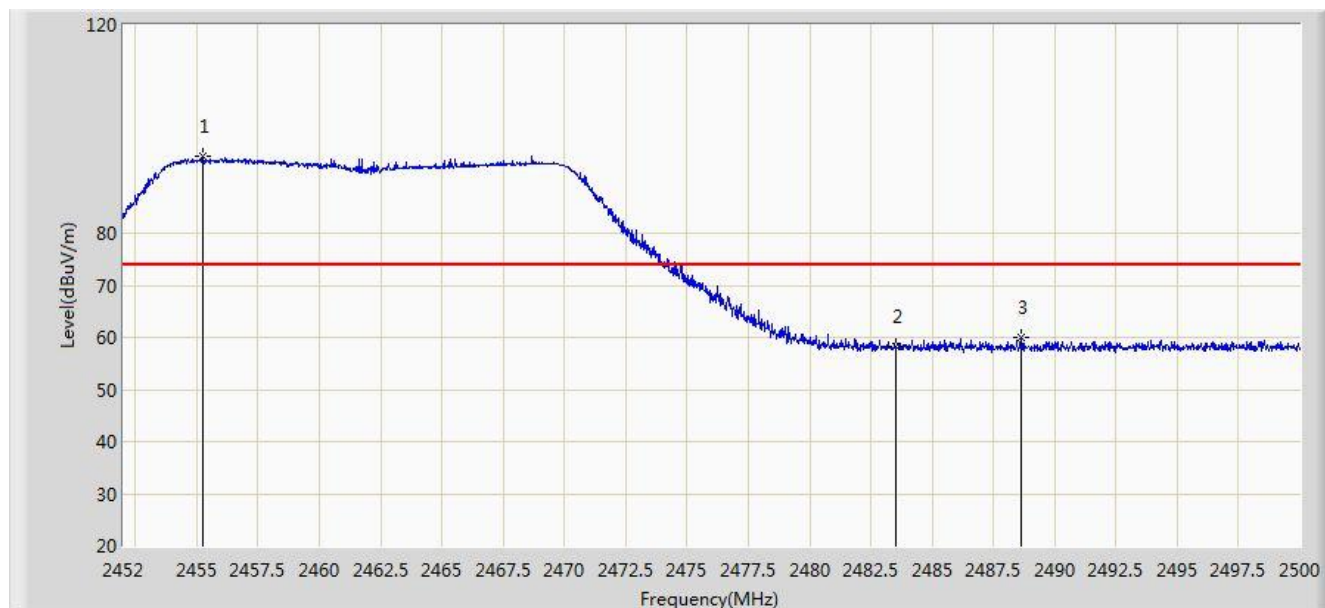


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.240	94.767	64.166	N/A	N/A	30.601	PK
2			2483.500	58.248	27.575	-15.752	74.000	30.673	PK
3			2488.624	59.907	29.219	-14.093	74.000	30.688	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

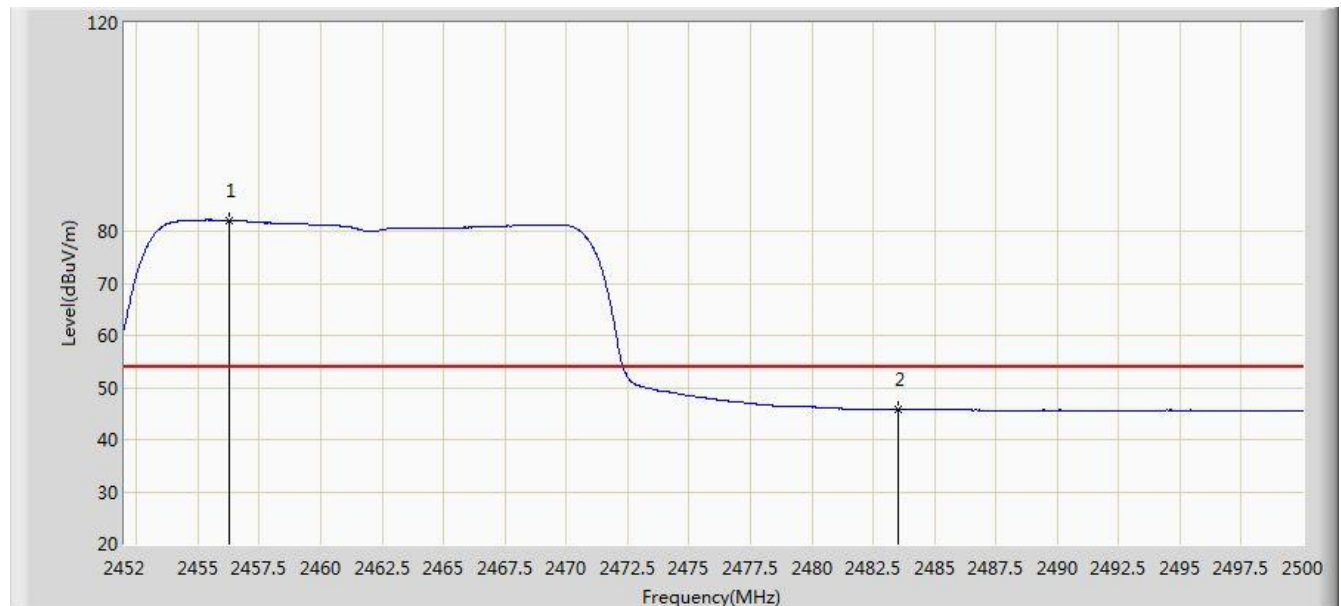


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.296	82.053	51.450	N/A	N/A	30.603	AV
2			2483.500	45.779	15.106	-8.221	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

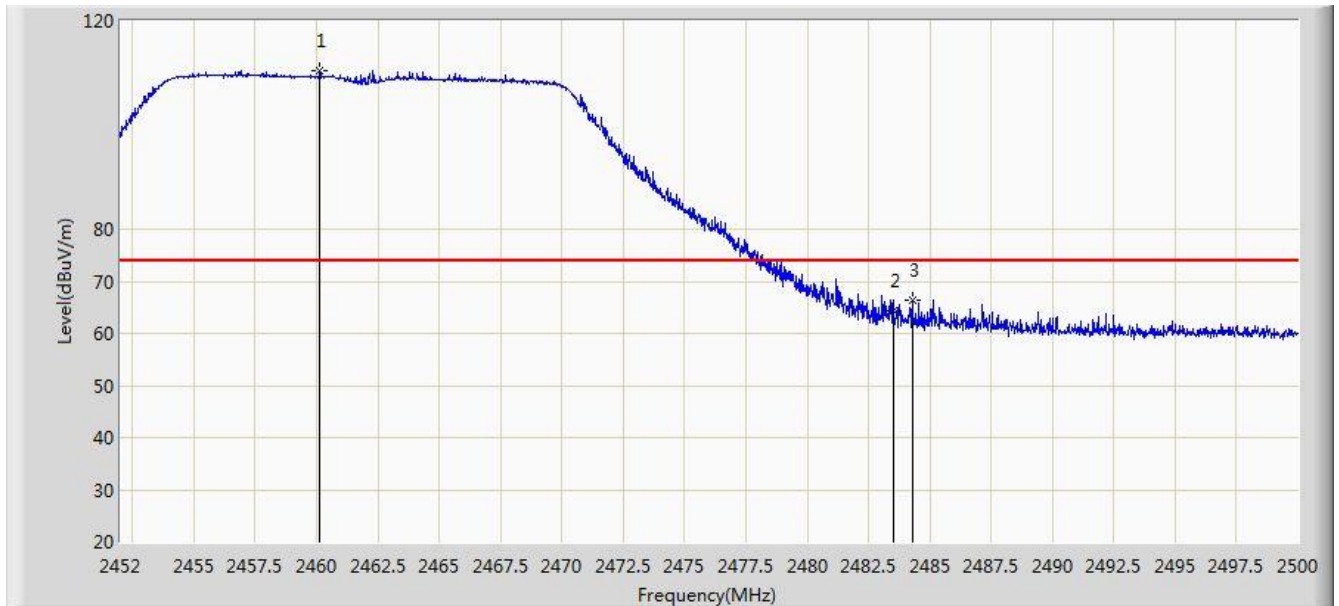


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.136	110.548	79.939	N/A	N/A	30.609	PK
2			2483.500	64.316	33.643	-9.684	74.000	30.673	PK
3			2484.304	66.386	35.711	-7.614	74.000	30.675	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 1	

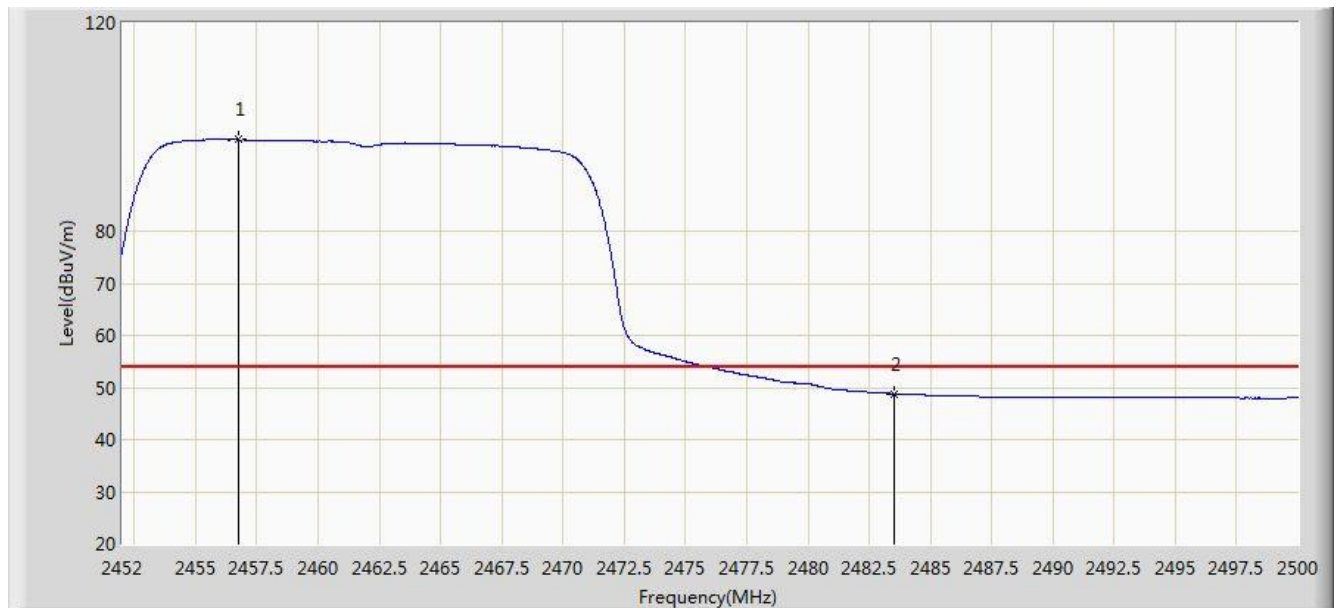


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	97.540	66.936	N/A	N/A	30.604	AV
2			2483.500	48.783	18.110	-5.217	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

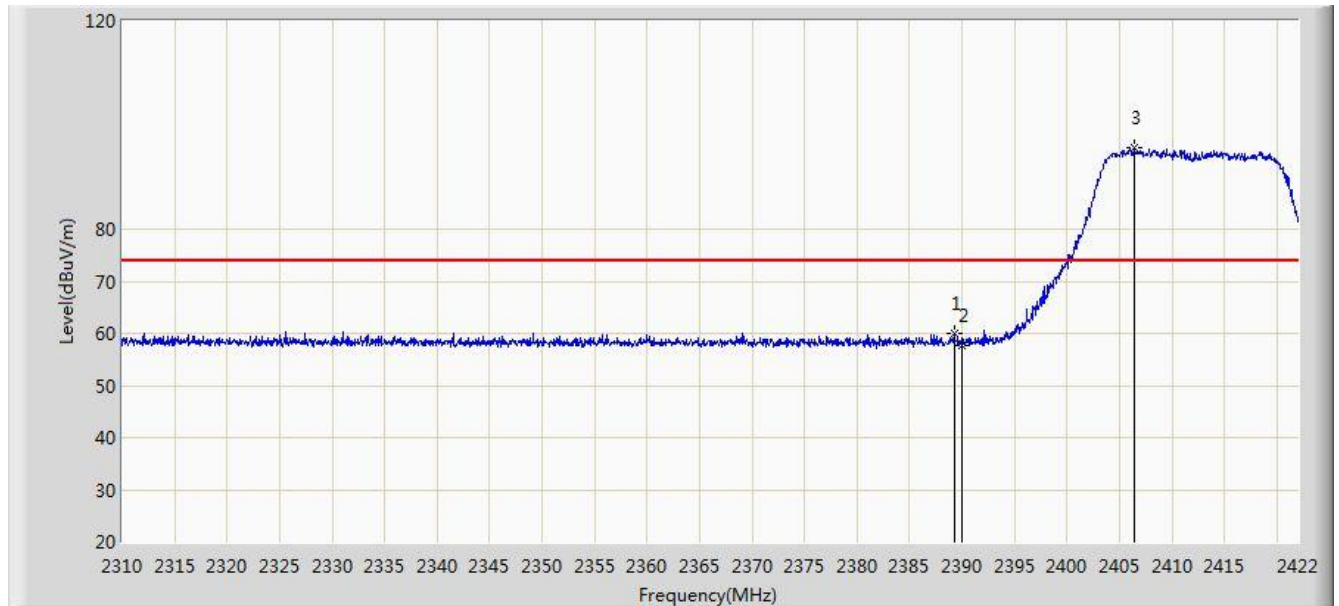


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.240	59.926	29.241	-14.074	74.000	30.686	PK
2			2390.000	57.815	27.131	-16.185	74.000	30.684	PK
3		*	2406.376	95.565	64.911	N/A	N/A	30.654	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

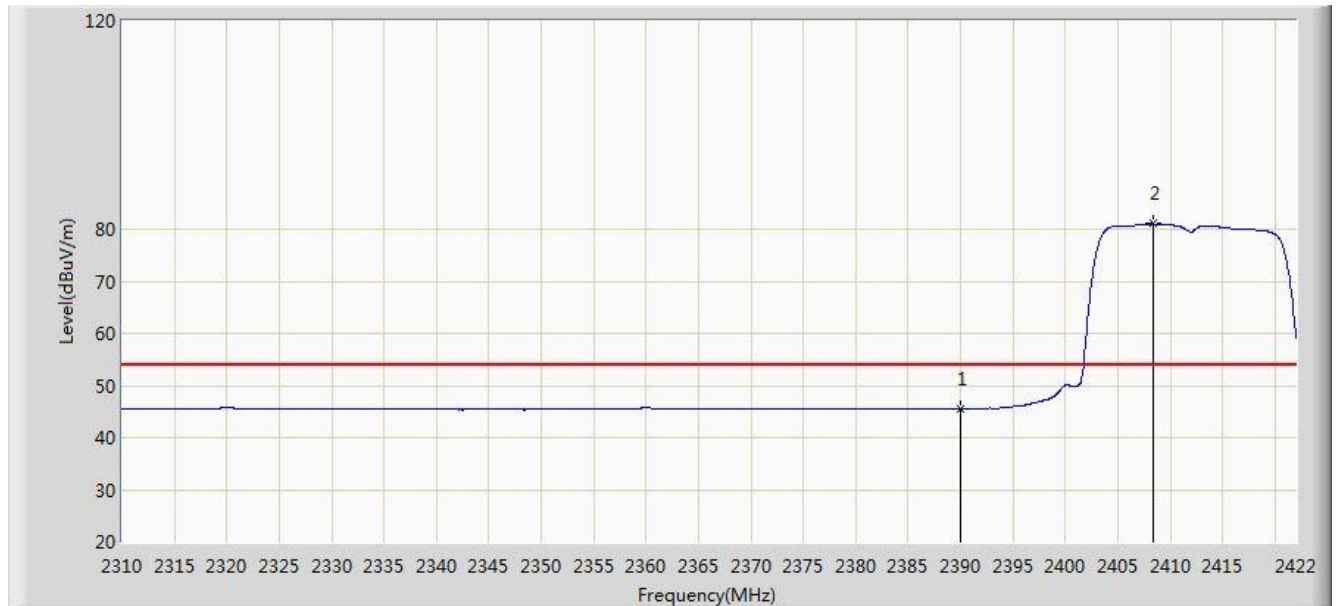


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.496	14.812	-8.504	54.000	30.684	AV
2		*	2408.336	81.033	50.382	N/A	N/A	30.651	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

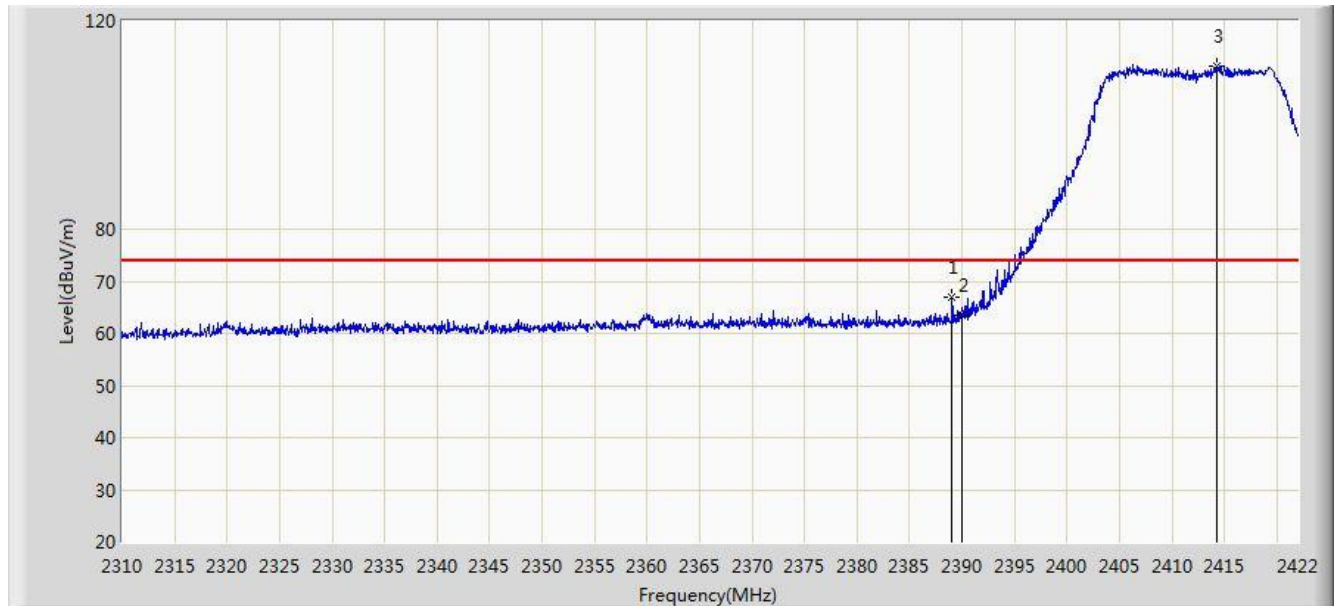


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.072	66.921	36.235	-7.079	74.000	30.686	PK
2			2390.000	63.528	32.844	-10.472	74.000	30.684	PK
3		*	2414.272	111.438	80.797	N/A	N/A	30.642	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

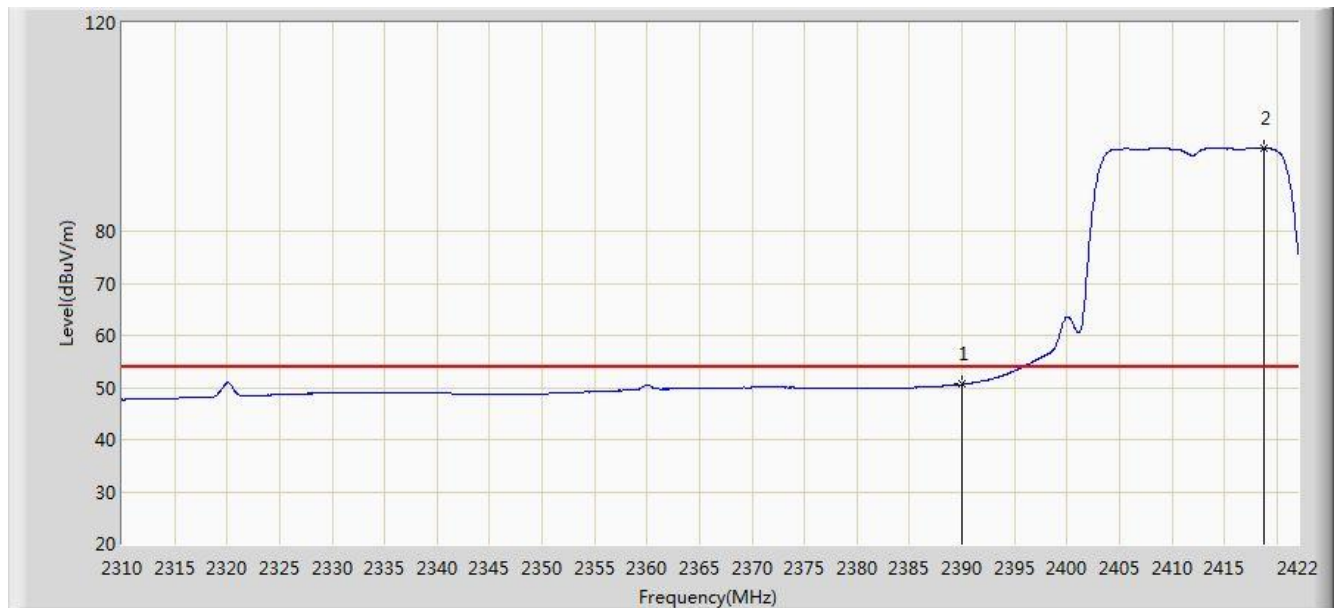


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.619	19.935	-3.381	54.000	30.684	AV
2		*	2418.808	95.945	65.311	N/A	N/A	30.634	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

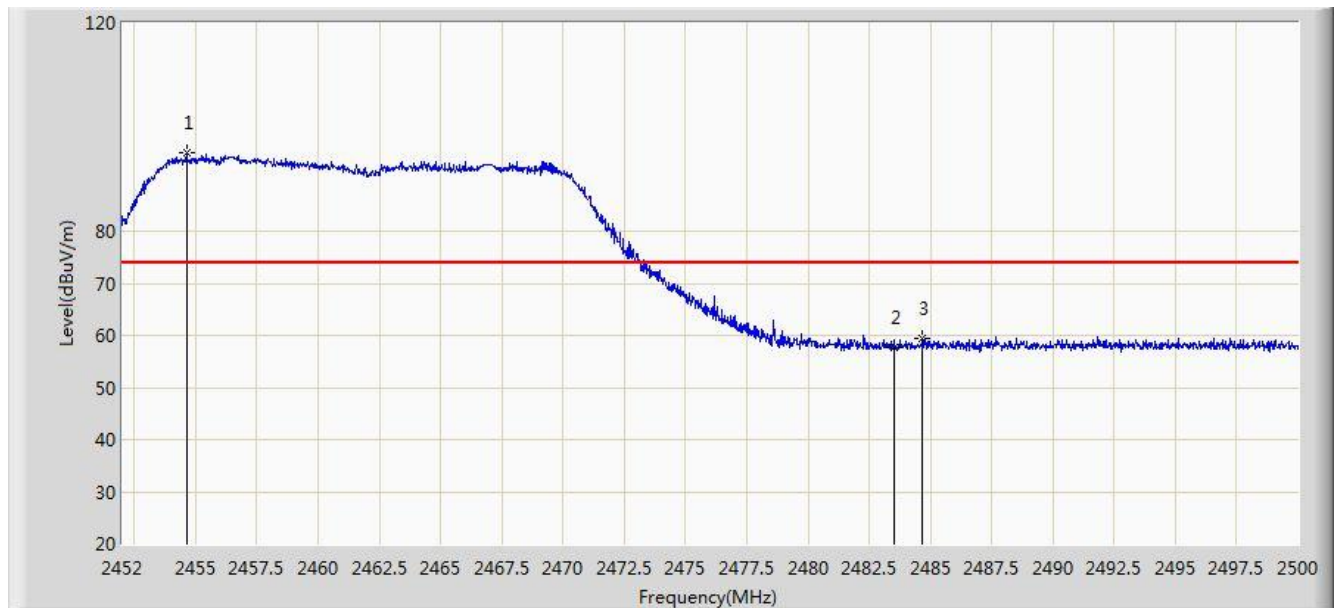


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.640	95.038	64.438	N/A	N/A	30.601	PK
2			2483.500	57.784	27.111	-16.216	74.000	30.673	PK
3			2484.664	59.323	28.647	-14.677	74.000	30.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

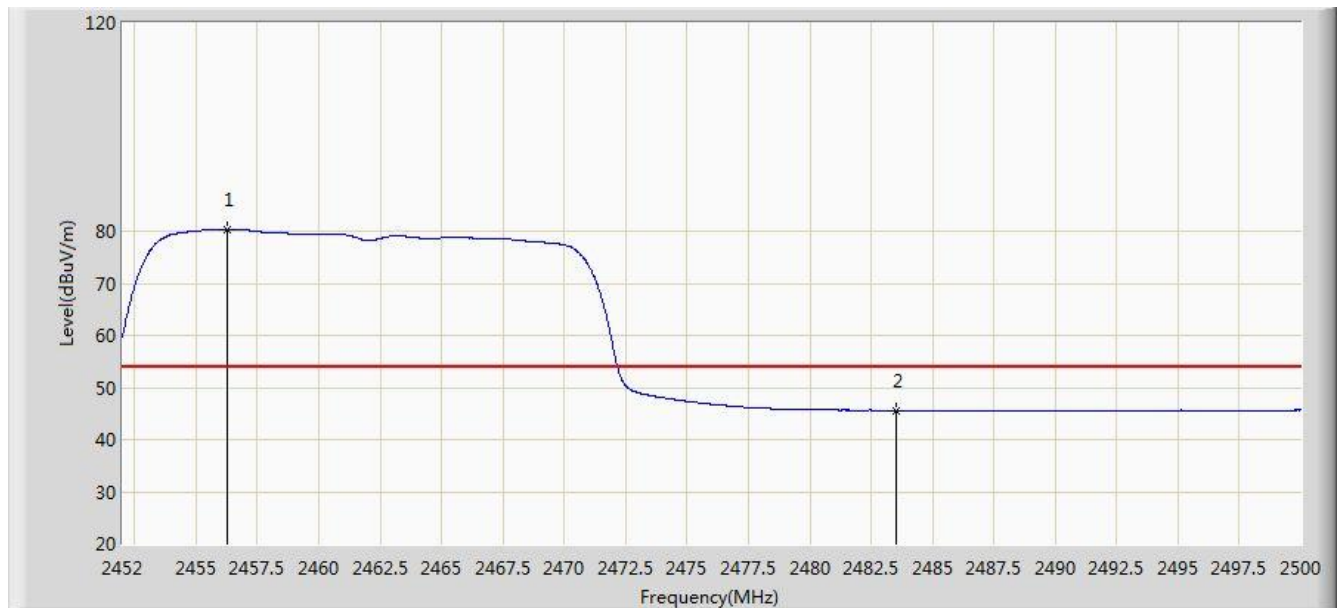


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.296	80.227	49.624	N/A	N/A	30.603	AV
2			2483.500	45.596	14.923	-8.404	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

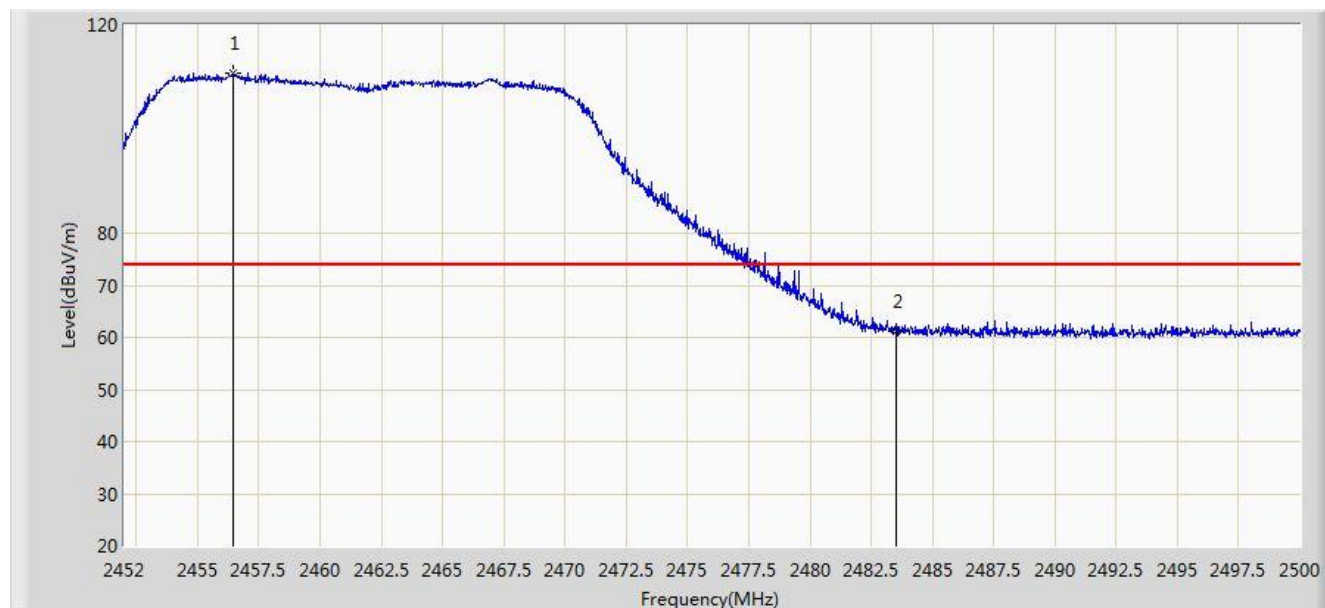


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.440	110.594	79.991	N/A	N/A	30.603	PK
2			2483.500	61.268	30.595	-12.732	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 21:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 3: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

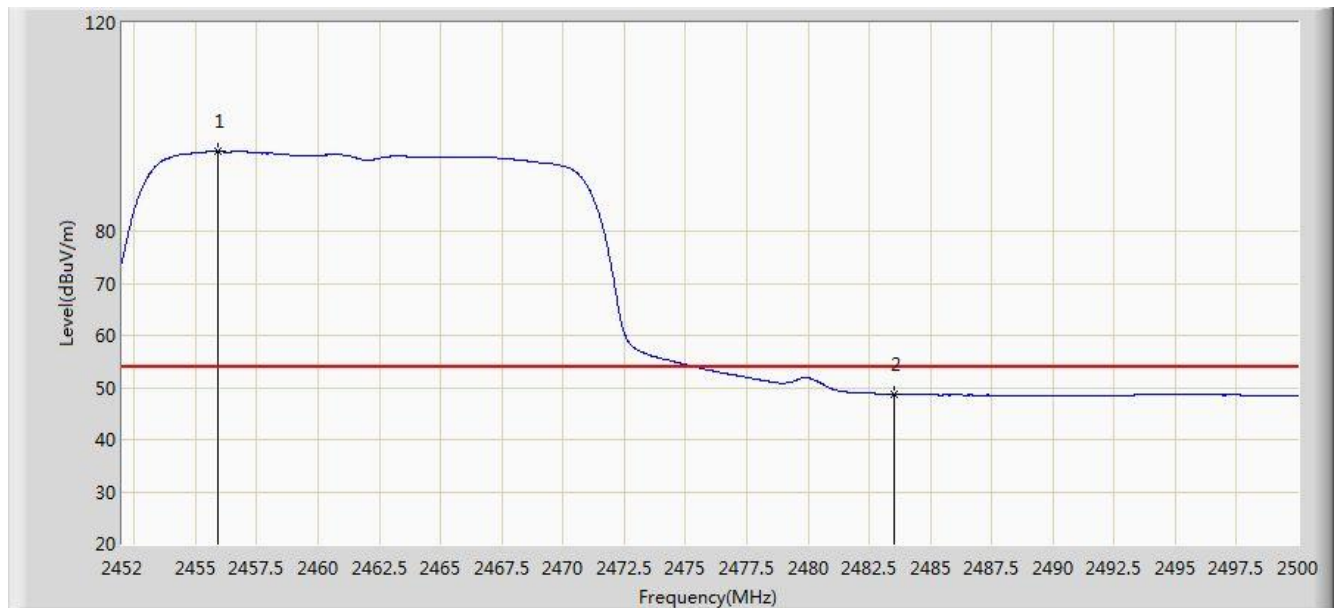


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.936	95.264	64.662	N/A	N/A	30.602	AV
2			2483.500	48.671	17.998	-5.329	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0	

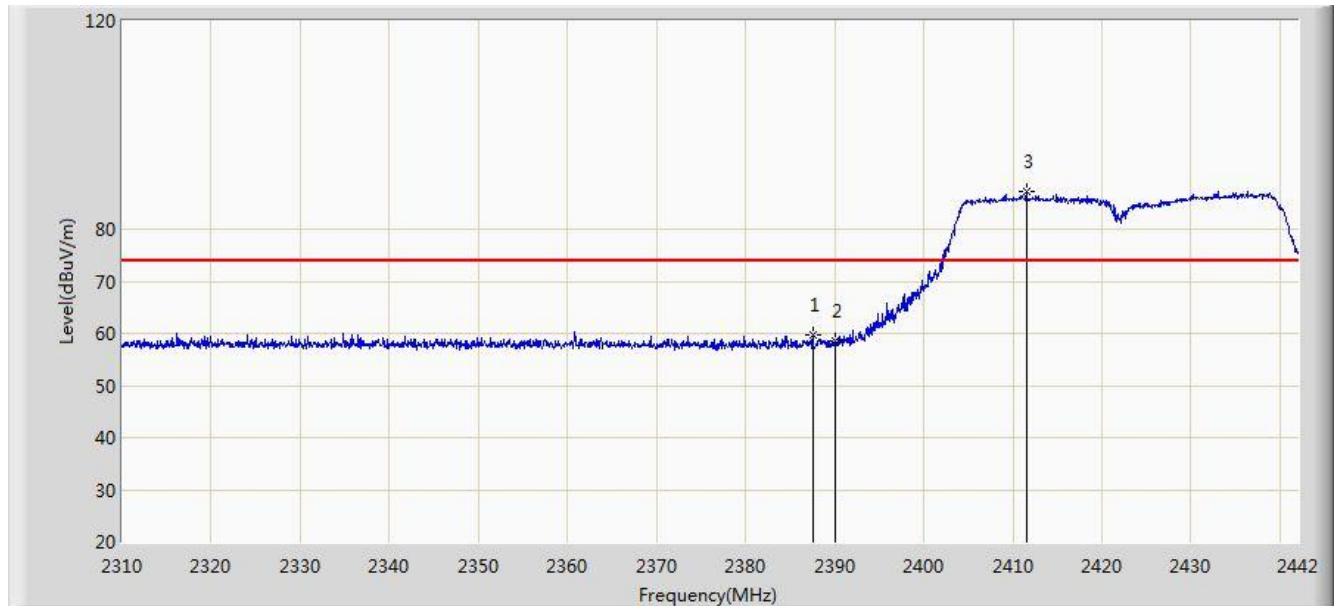


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.550	59.578	28.889	-14.422	74.000	30.689	PK
2			2390.000	58.468	27.784	-15.532	74.000	30.684	PK
3		*	2411.508	87.296	56.650	N/A	N/A	30.645	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0	

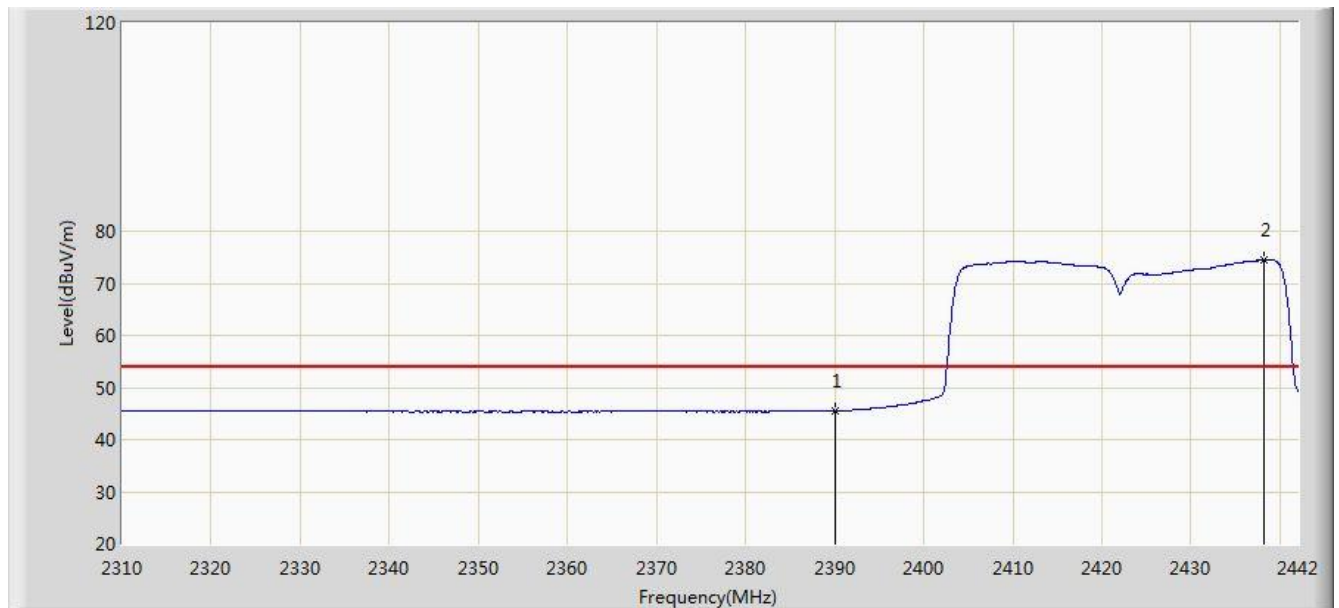


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.537	14.853	-8.463	54.000	30.684	AV
2		*	2438.238	74.435	43.833	N/A	N/A	30.602	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0	

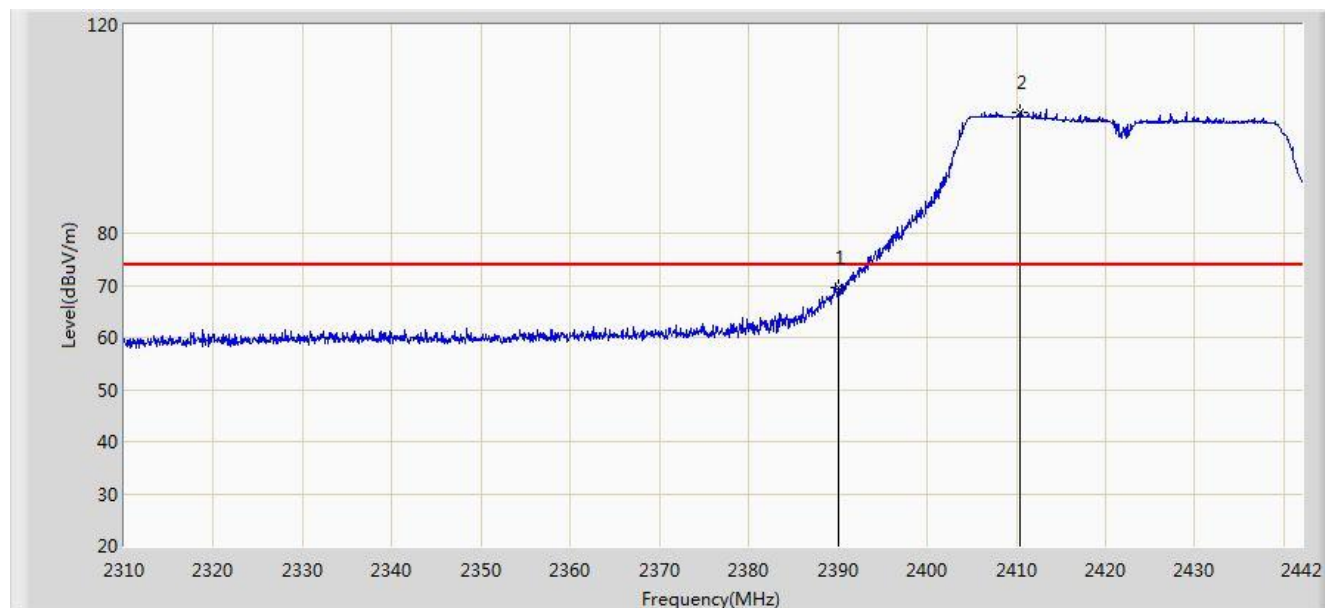


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	69.434	38.750	-4.566	74.000	30.684	PK
2		*	2410.386	103.302	72.655	N/A	N/A	30.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0	

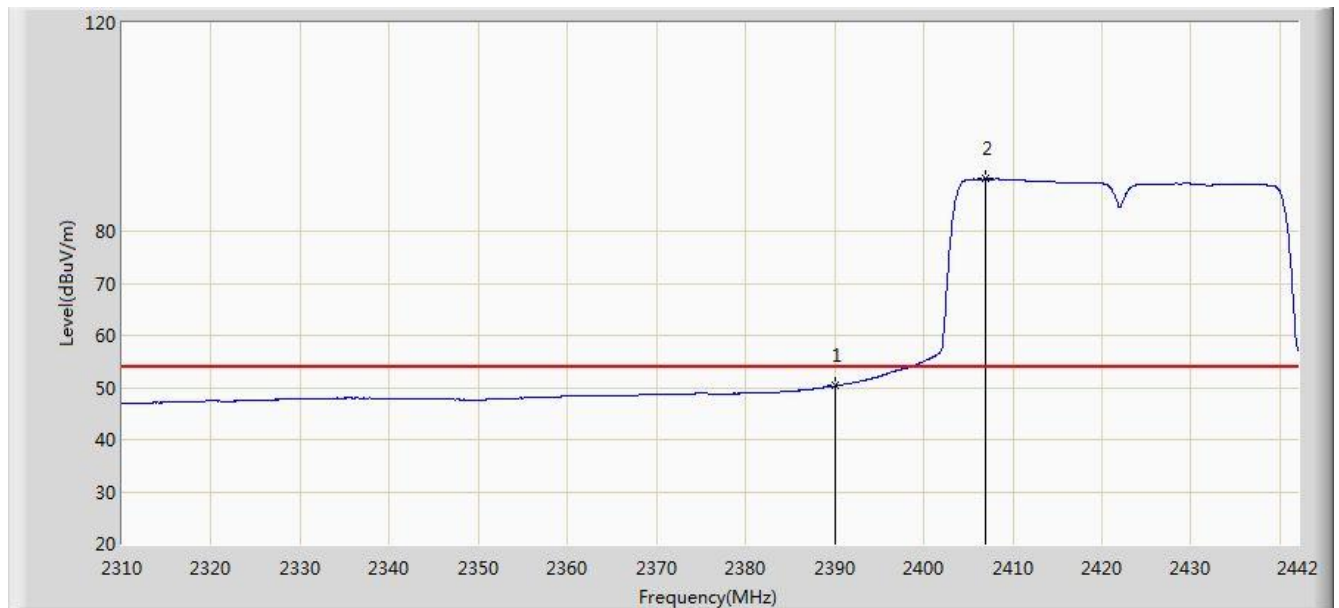


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.310	19.626	-3.690	54.000	30.684	AV
2		*	2406.888	90.051	59.398	N/A	N/A	30.653	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0	

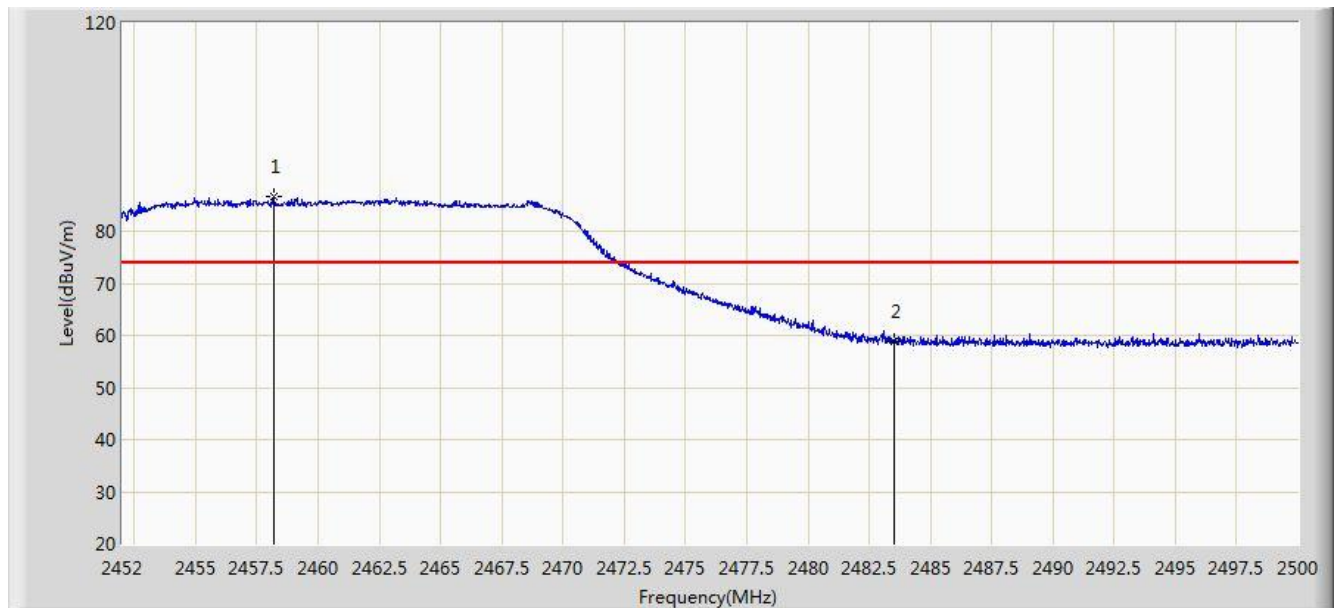


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.168	86.619	56.013	N/A	N/A	30.606	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0	

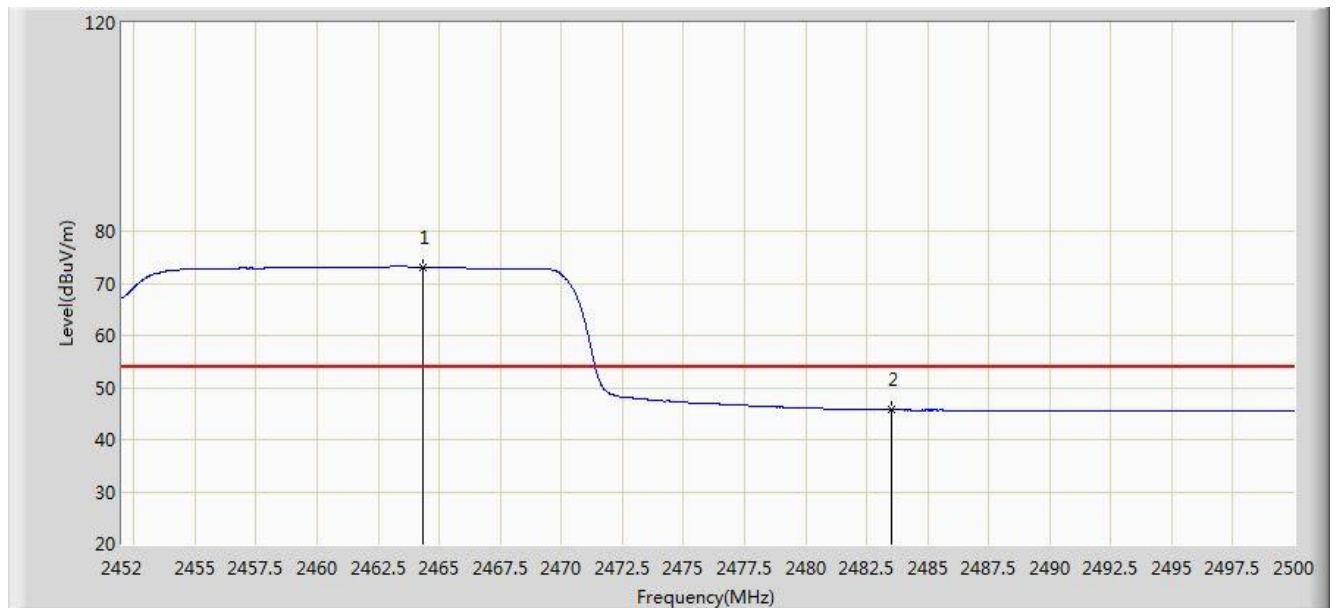


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.360	73.096	42.479	N/A	N/A	30.617	AV
2			2483.500	45.694	15.021	-8.306	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0	

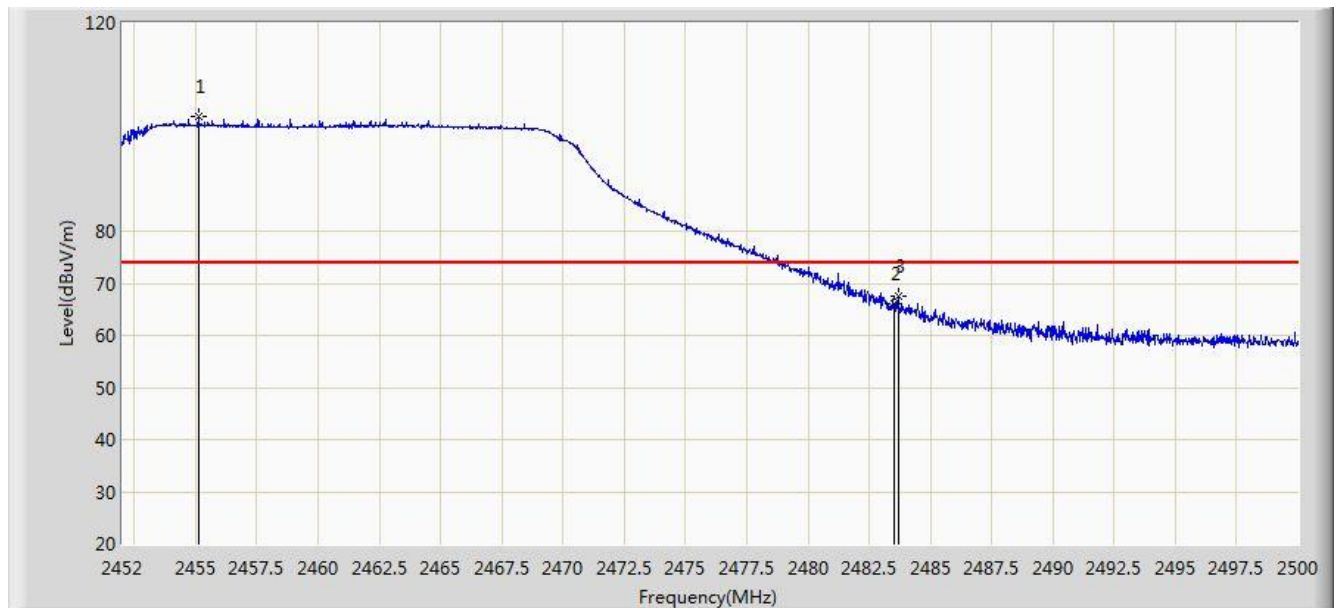


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.120	101.919	71.318	N/A	N/A	30.601	PK
2			2483.500	66.020	35.347	-7.980	74.000	30.673	PK
3			2483.680	67.463	36.790	-6.537	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0	

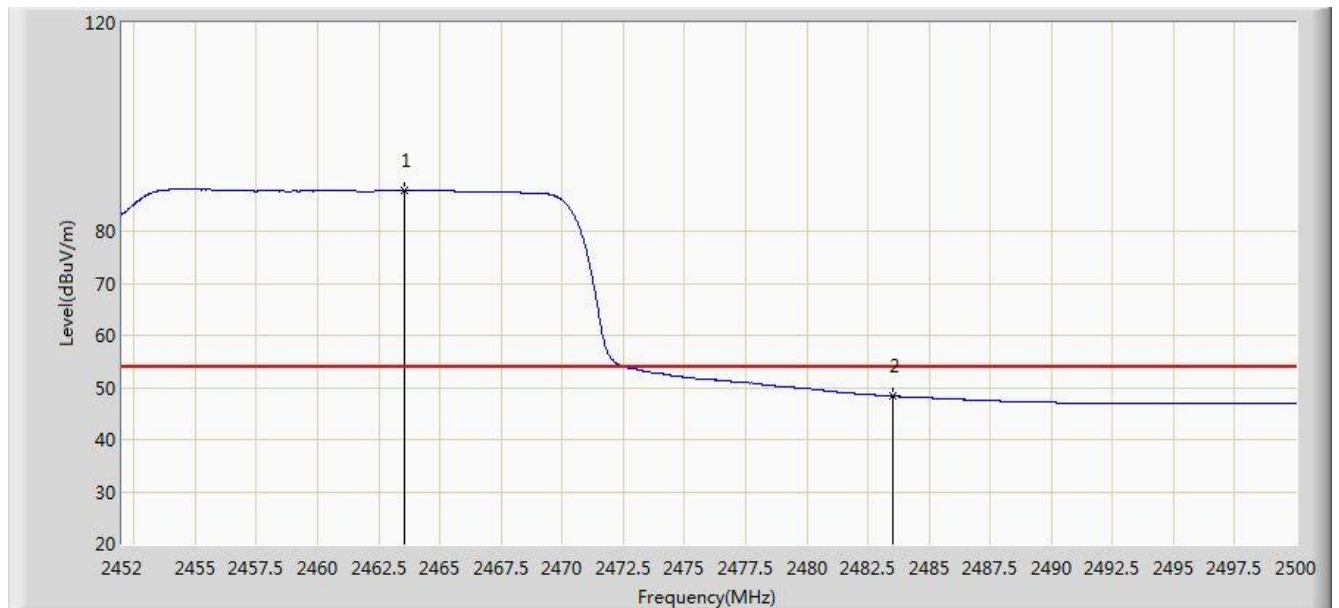


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.544	87.869	57.255	N/A	N/A	30.615	AV
2			2483.500	48.346	17.673	-5.654	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 1	

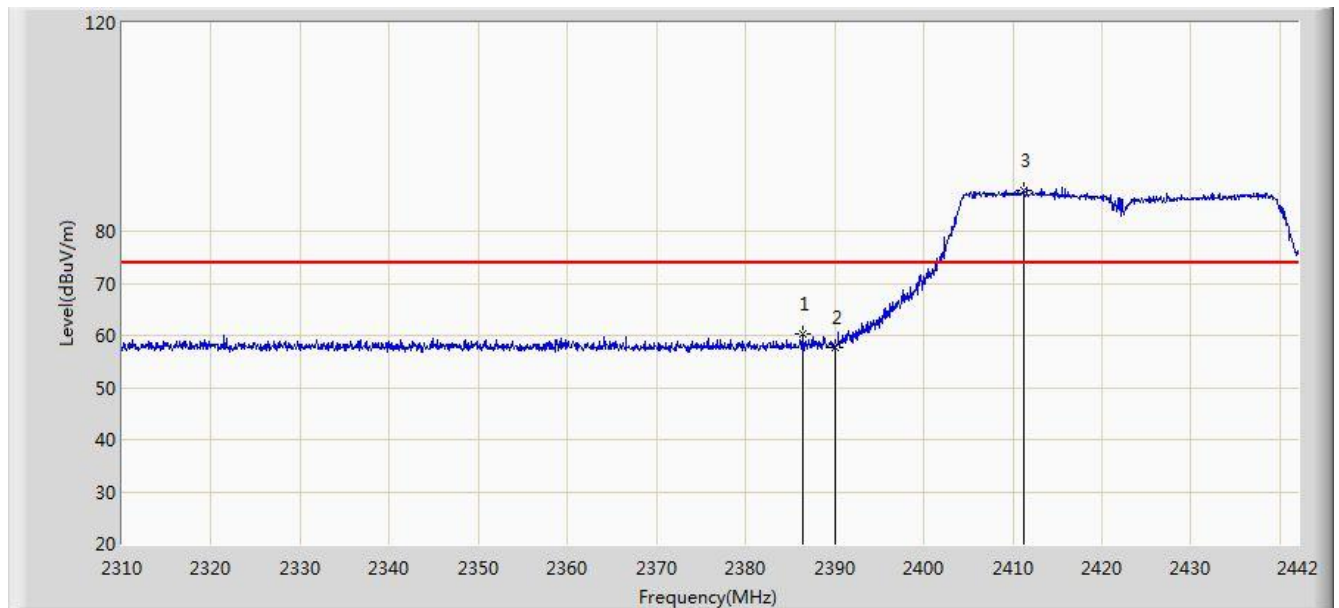


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.362	60.303	29.611	-13.697	74.000	30.692	PK
2			2390.000	57.778	27.094	-16.222	74.000	30.684	PK
3		*	2411.244	87.868	57.222	N/A	N/A	30.646	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 1	

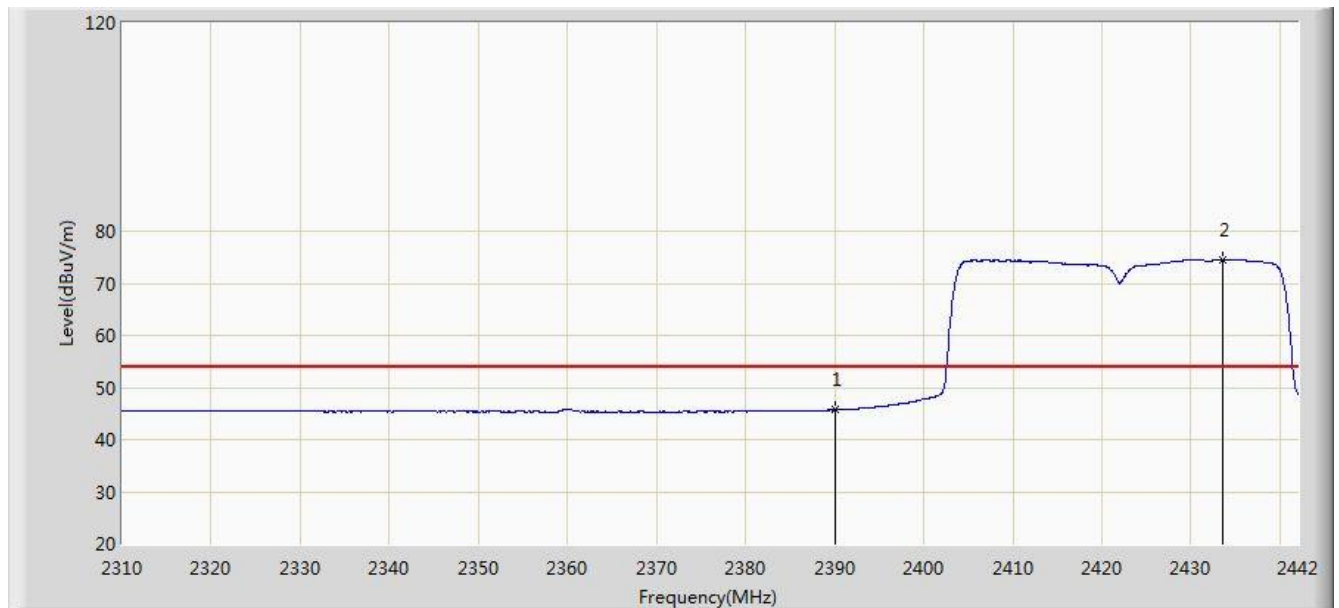


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.706	15.022	-8.294	54.000	30.684	AV
2		*	2433.486	74.521	43.911	N/A	N/A	30.611	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 1	

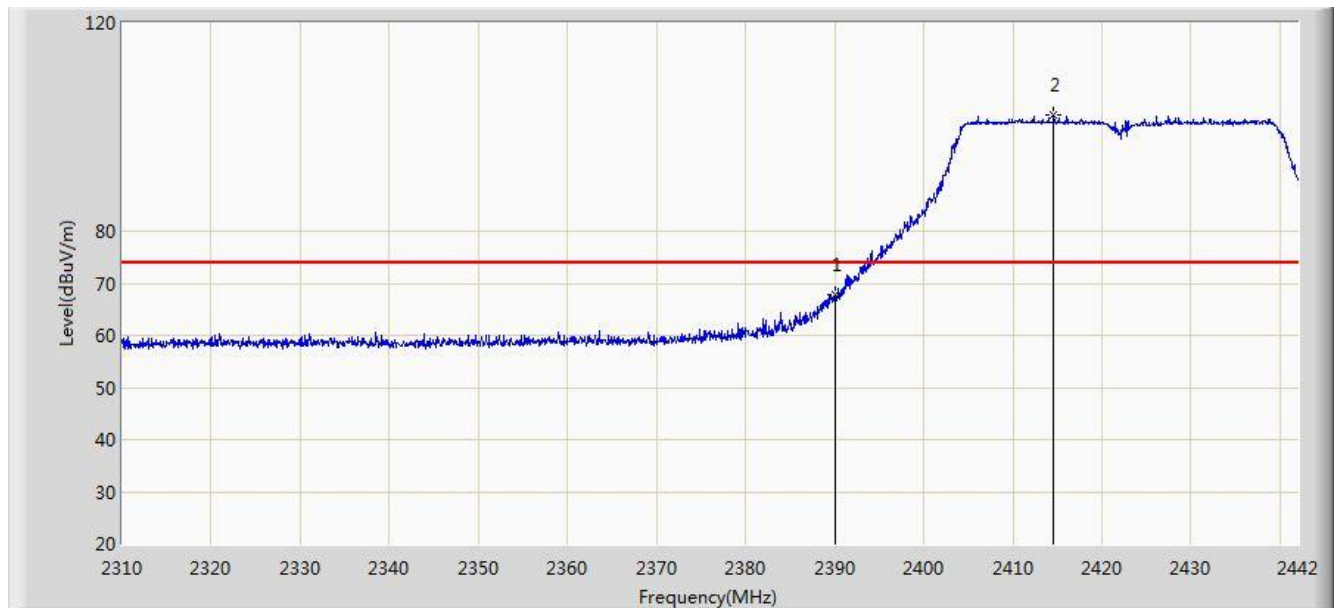


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	67.748	37.064	-6.252	74.000	30.684	PK
2		*	2414.610	102.192	71.551	N/A	N/A	30.641	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 1	

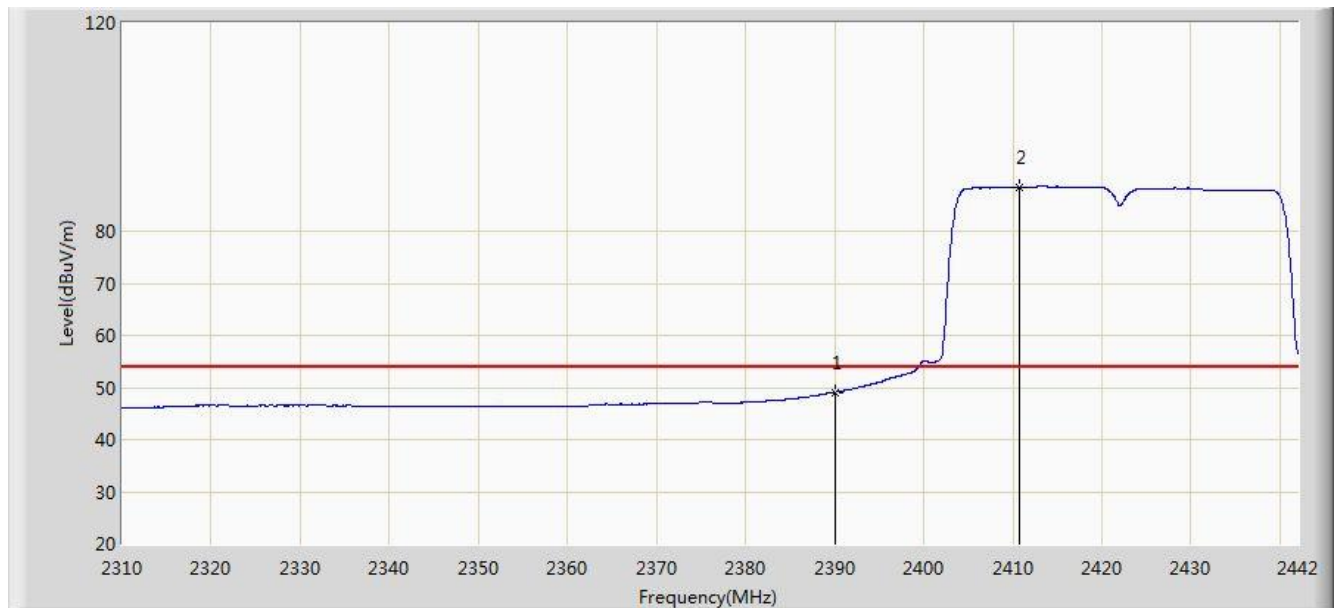


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.089	18.405	-4.911	54.000	30.684	AV
2		*	2410.716	88.512	57.865	N/A	N/A	30.647	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 1	

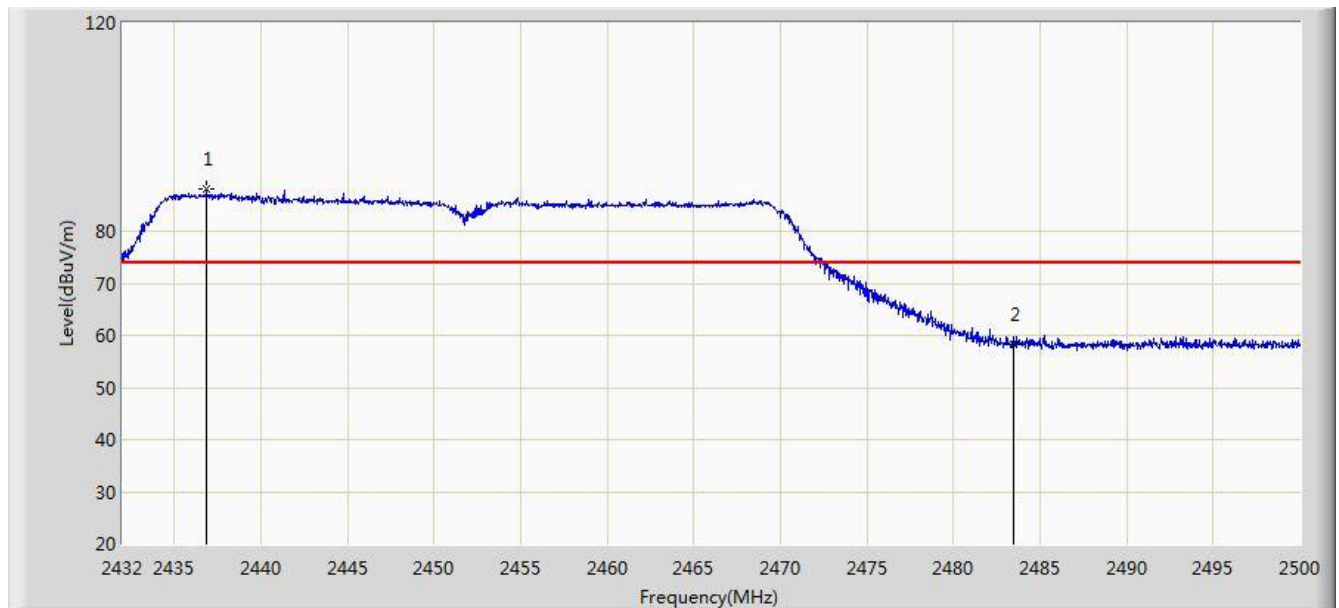


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2436.862	88.015	57.411	N/A	N/A	30.604	PK
2			2483.500	58.202	27.529	-15.798	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 1	

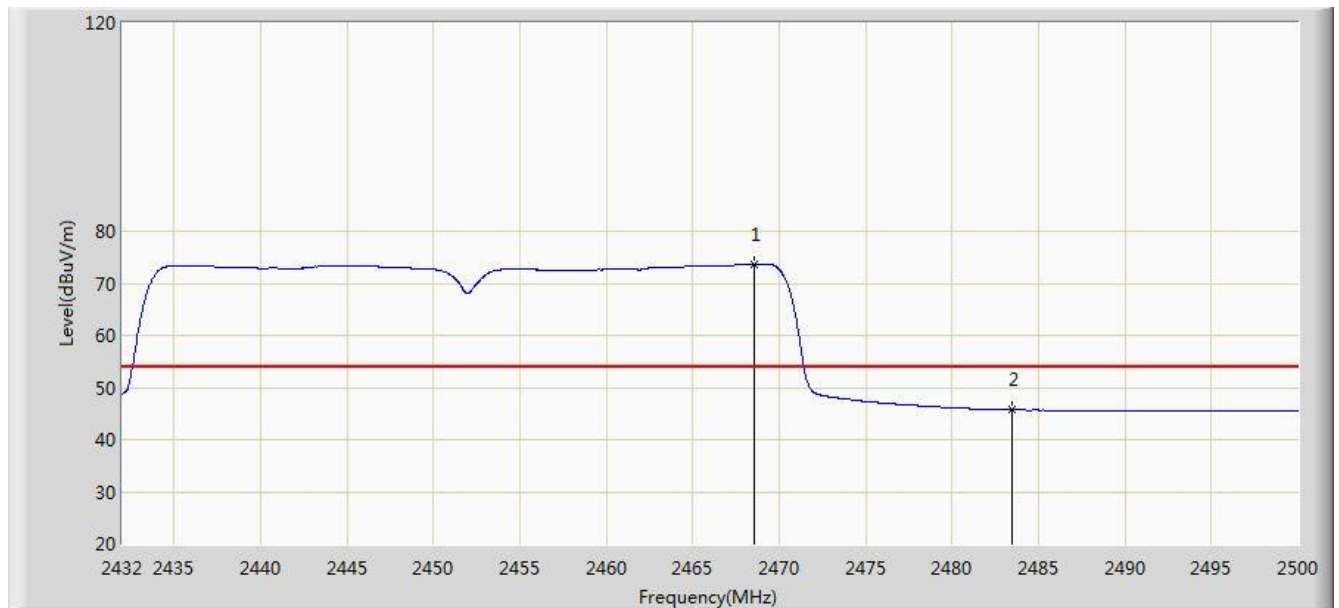


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.550	73.621	42.992	N/A	N/A	30.629	AV
2			2483.500	45.721	15.048	-8.279	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 1	

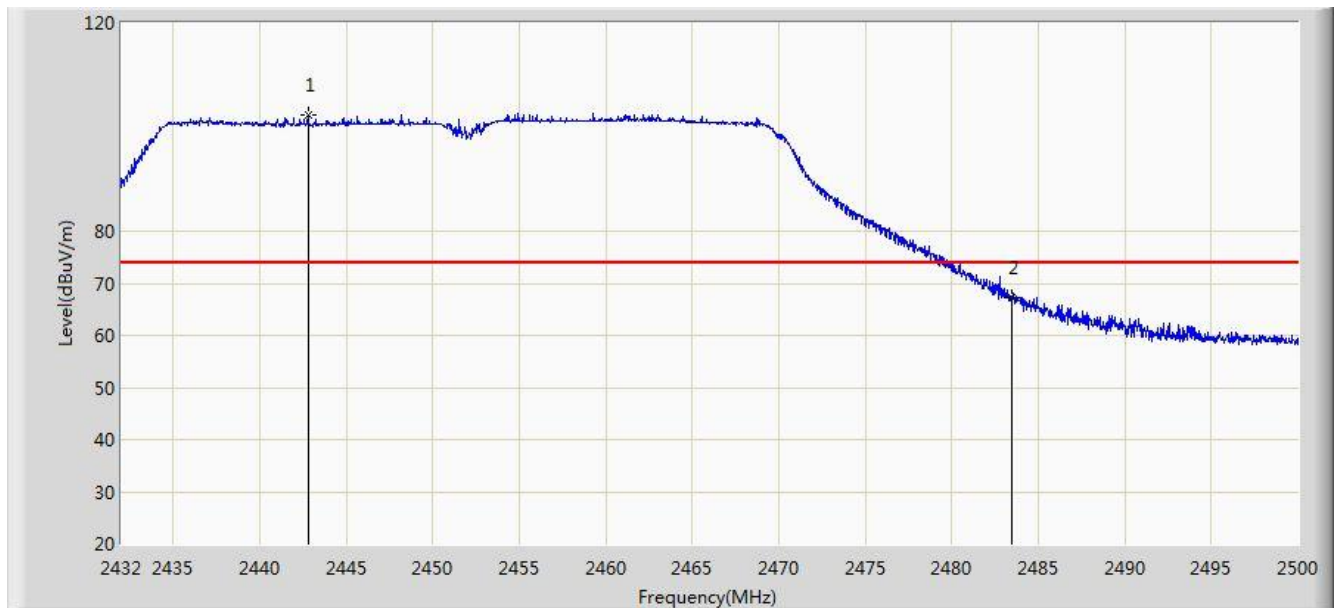


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2442.812	102.456	71.862	N/A	N/A	30.594	PK
2			2483.500	67.309	36.636	-6.691	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 1	

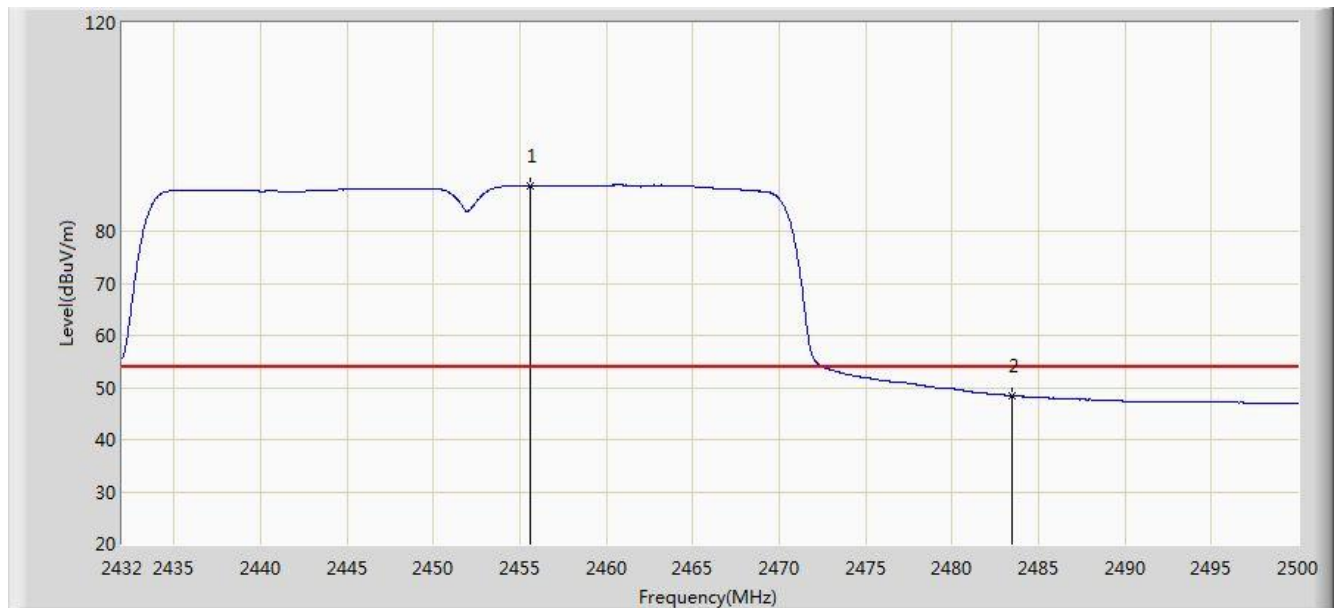


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.562	88.794	58.192	N/A	N/A	30.602	AV
2			2483.500	48.445	17.772	-5.555	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

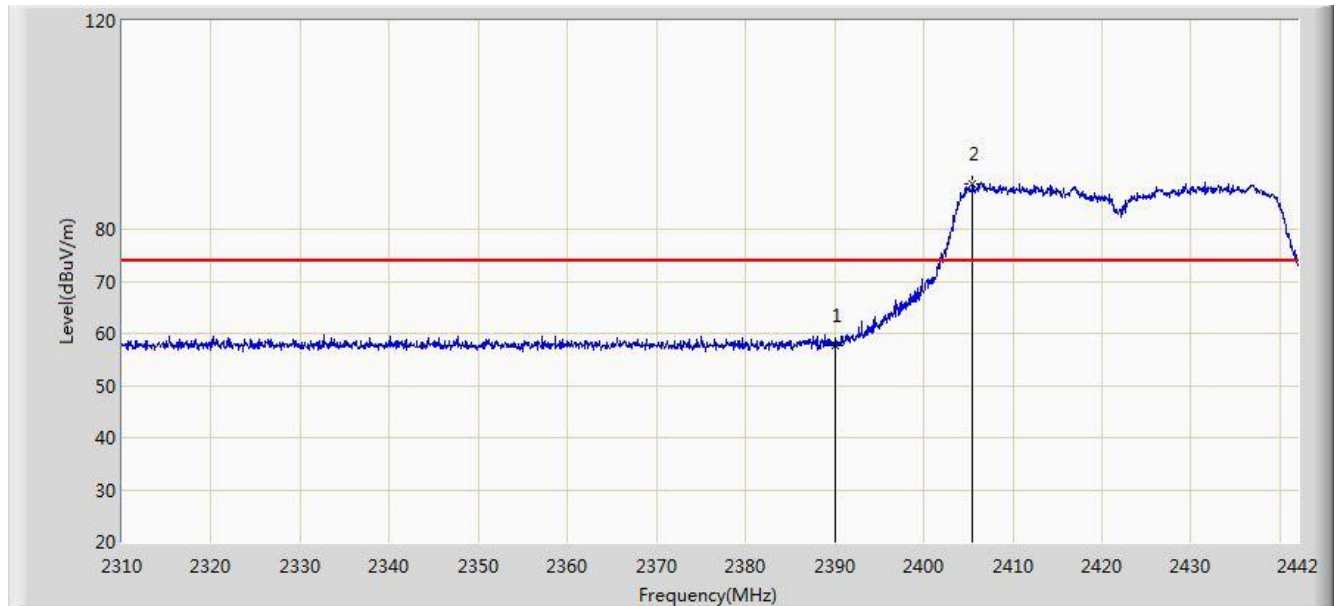


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	57.796	27.112	-16.204	74.000	30.684	PK
2		*	2405.502	88.833	58.178	N/A	N/A	30.655	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

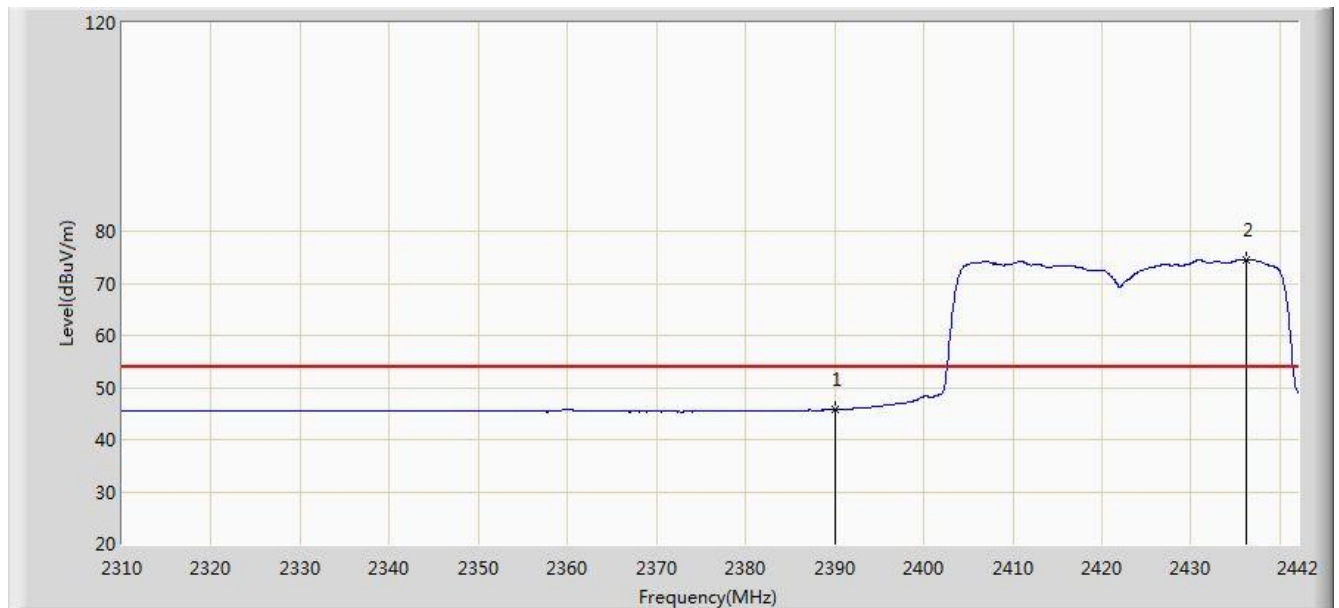


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.733	15.049	-8.267	54.000	30.684	AV
2		*	2436.192	74.571	43.966	N/A	N/A	30.605	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

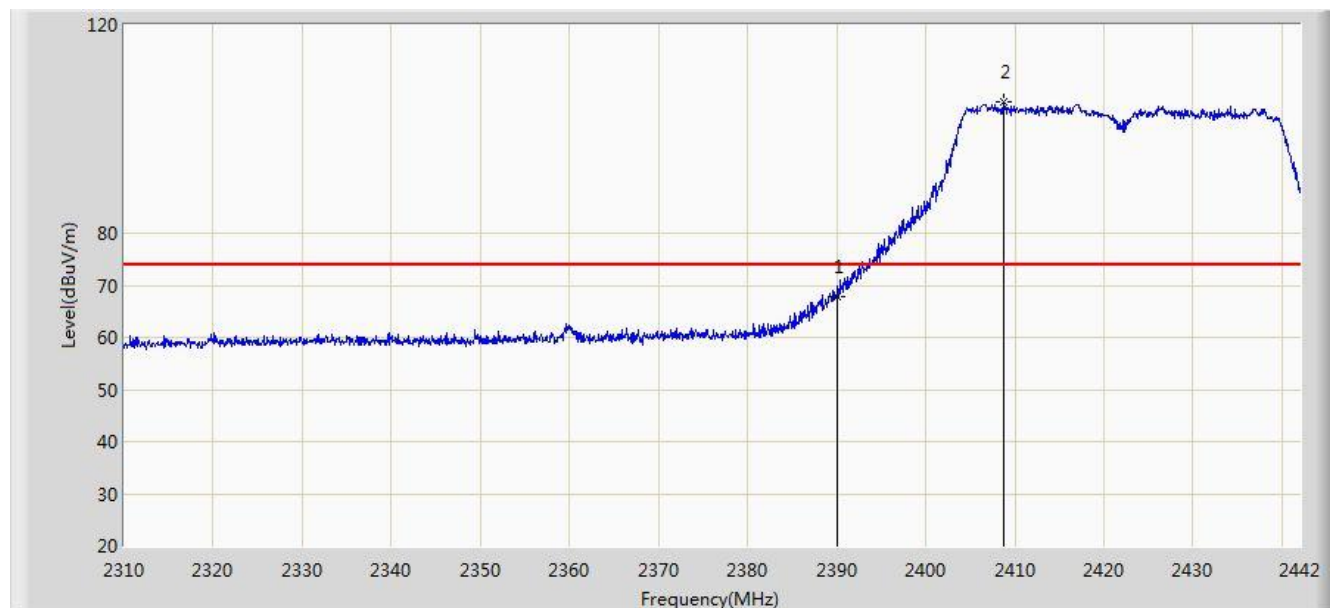


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	67.748	37.064	-6.252	74.000	30.684	PK
2		*	2408.670	105.252	74.602	N/A	N/A	30.650	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

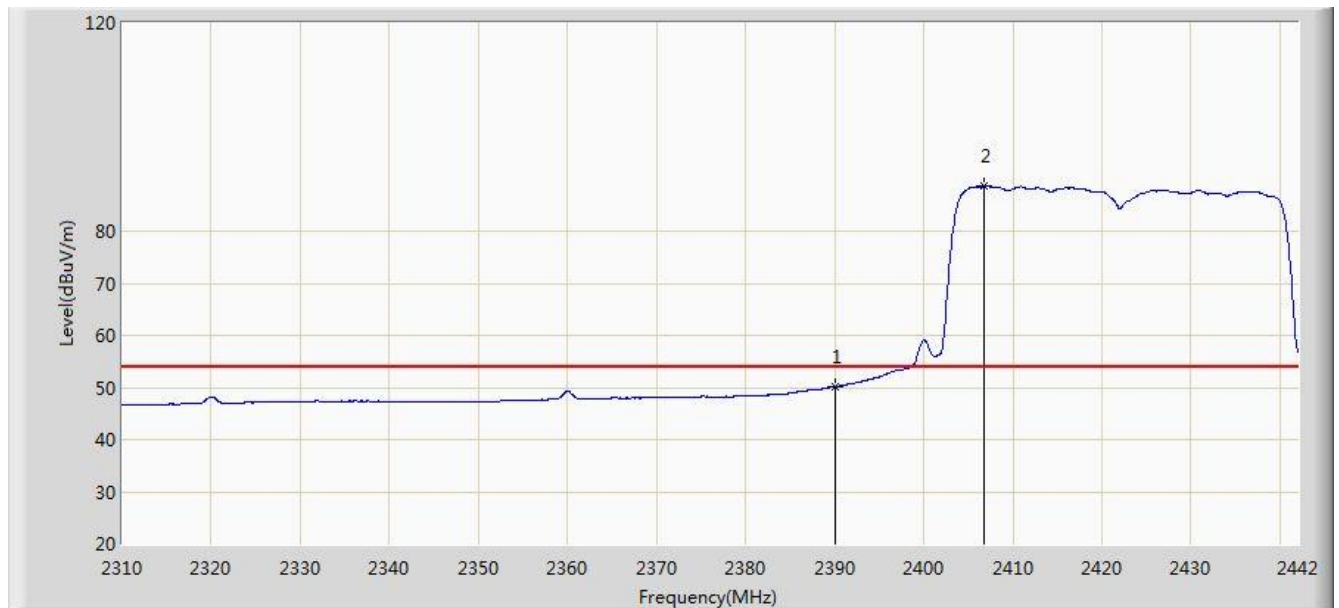


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.152	19.468	-3.848	54.000	30.684	AV
2		*	2406.822	88.736	58.083	N/A	N/A	30.654	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

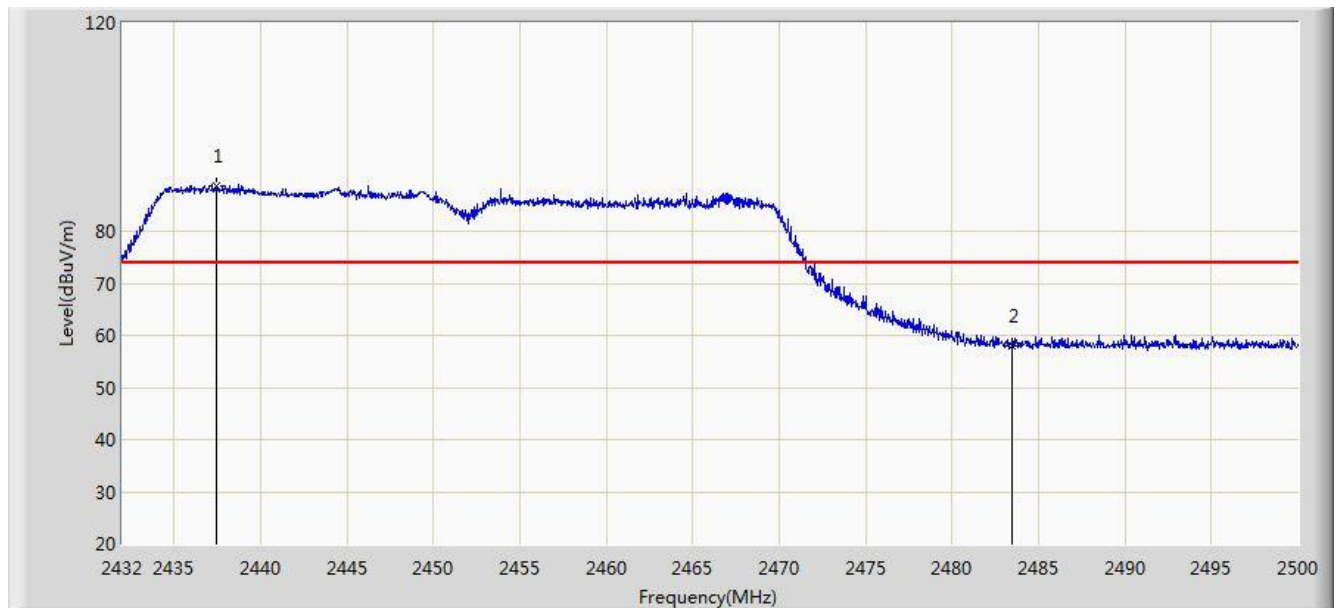


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2437.474	88.794	58.191	N/A	N/A	30.603	PK
2			2483.500	57.889	27.216	-16.111	74.000	30.673	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

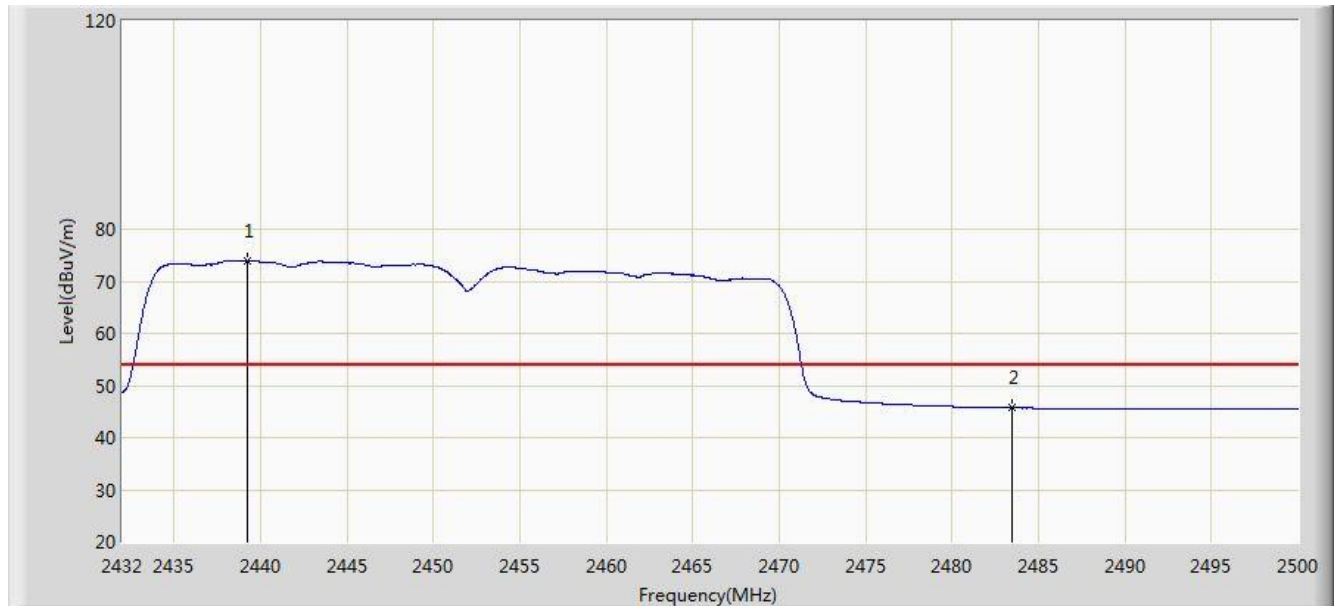


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2439.276	73.950	43.350	N/A	N/A	30.600	AV
2			2483.500	45.676	15.003	-8.324	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

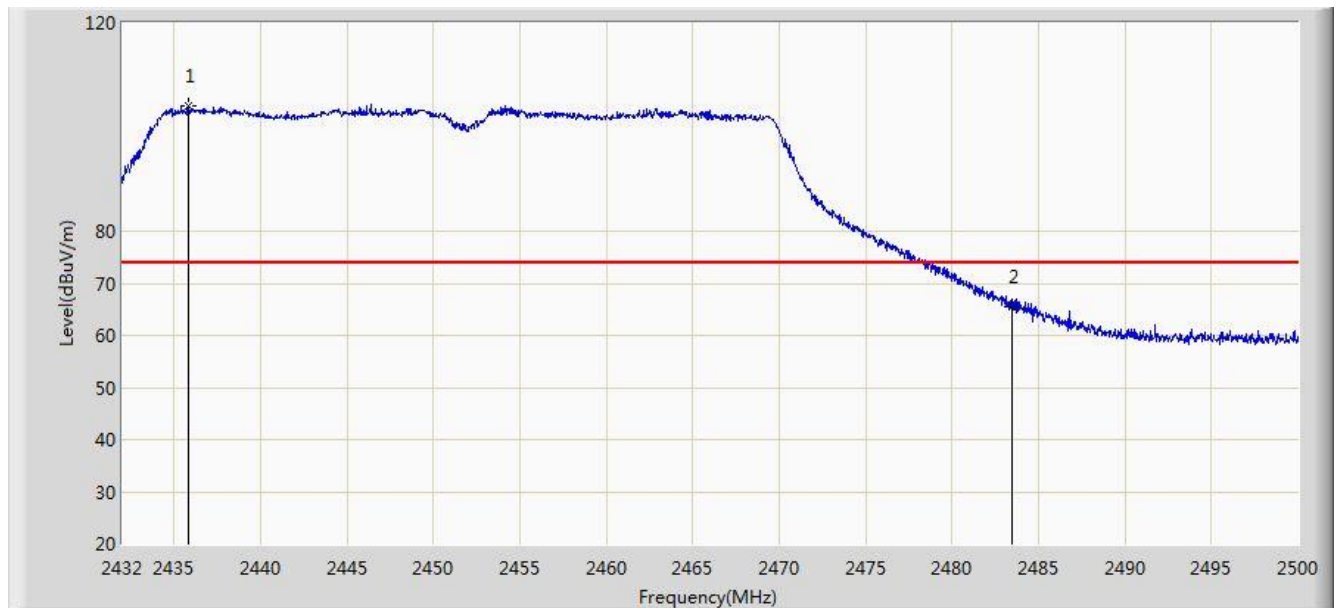


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.808	104.005	73.399	N/A	N/A	30.606	PK
2			2483.500	65.408	34.735	-8.592	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Engineer: Milo Li	
Site: AC1	Time: 2014/08/20 - 22:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 4: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

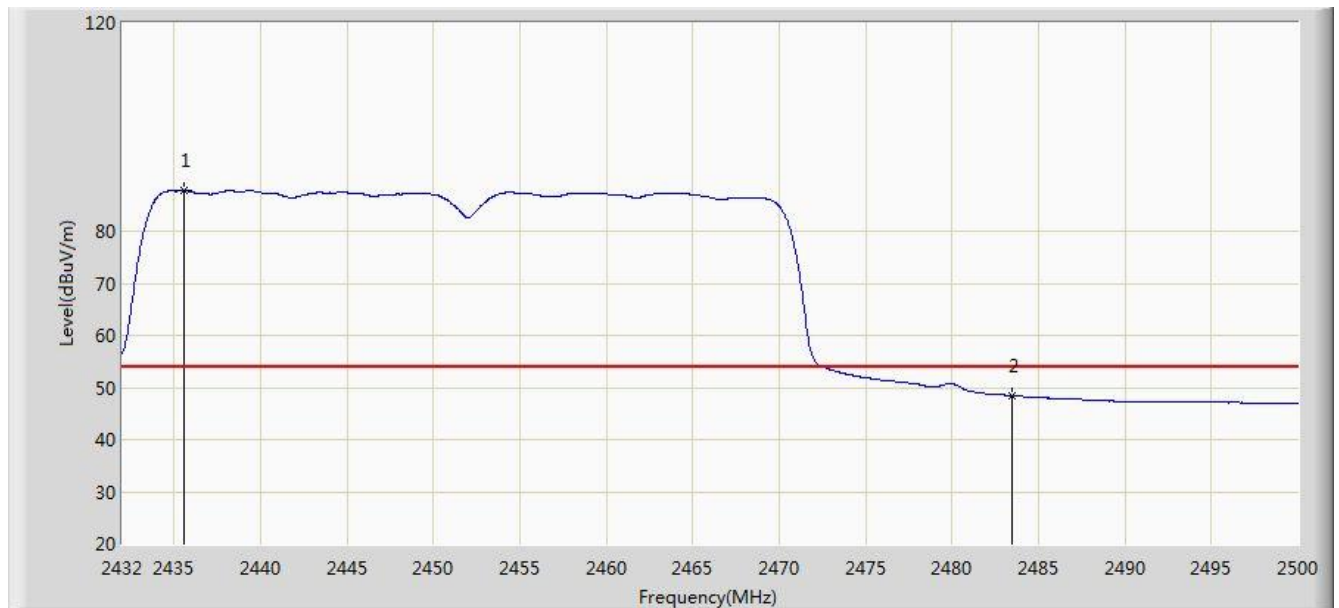

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2435.570	87.738	57.132	N/A	N/A	30.607	AV
2			2483.500	48.444	17.771	-5.556	54.000	30.673	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

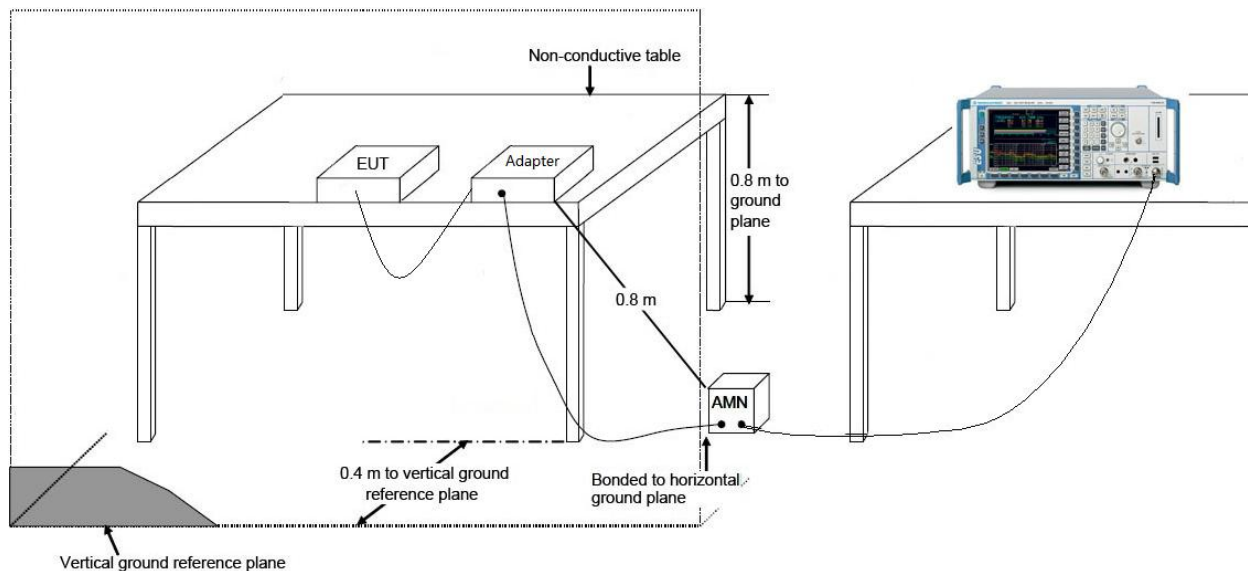

7.8.3. Test Result

Engineer: Milo Li	
Site: SR2	Time: 2014/08/14 - 19:32
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1	

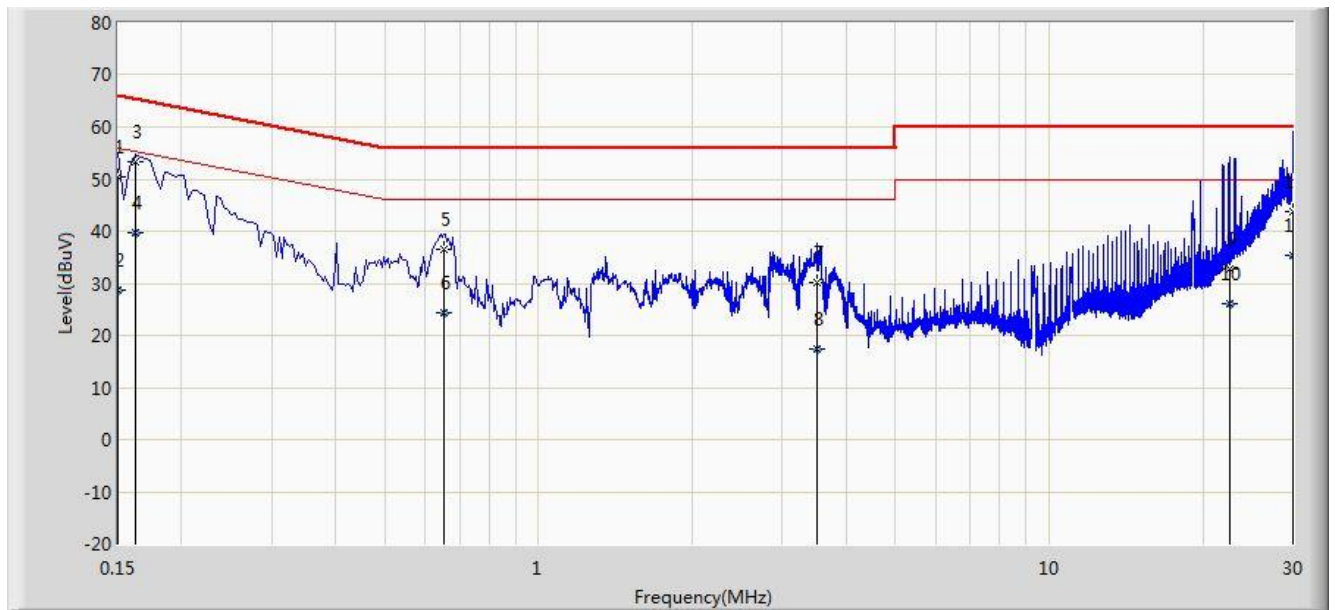


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.150	50.345	39.177	-15.655	66.000	11.168	QP
2			0.150	28.792	17.624	-27.208	56.000	11.168	AV
3		*	0.162	53.440	43.343	-11.921	65.361	10.097	QP
4			0.162	39.821	29.724	-15.540	55.361	10.097	AV
5			0.654	36.382	26.295	-19.618	56.000	10.087	QP
6			0.654	24.346	14.259	-21.654	46.000	10.087	AV
7			3.498	30.251	20.343	-25.749	56.000	9.908	QP
8			3.498	17.453	7.545	-28.547	46.000	9.908	AV
9			22.566	32.642	22.468	-27.358	60.000	10.174	QP
10			22.566	25.943	15.769	-24.057	50.000	10.174	AV
11			29.938	43.913	33.643	-16.087	60.000	10.270	QP
12			29.938	35.492	25.222	-14.508	50.000	10.270	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Engineer: Milo Li	
Site: SR2	Time: 2014/08/14 - 19:37
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: WIRELESS ACCESS POINT	Power: AC 120V/60Hz
Note: Mode 1	

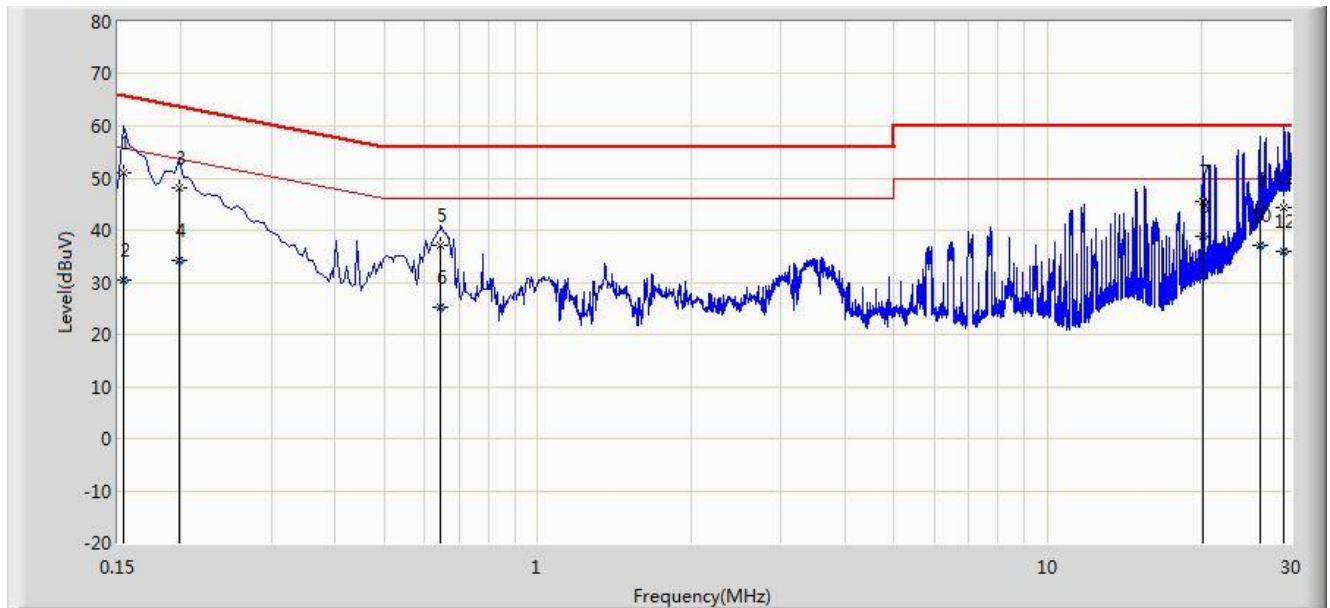

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor	Type
1			0.154	51.050	40.334	-14.731	65.781	10.716	QP
2			0.154	30.367	19.651	-25.414	55.781	10.716	AV
3			0.198	48.175	38.161	-15.519	63.694	10.015	QP
4			0.198	34.247	24.233	-19.447	53.694	10.015	AV
5			0.646	37.085	26.980	-18.915	56.000	10.105	QP
6			0.646	25.166	15.060	-20.834	46.000	10.105	AV
7			20.186	45.447	35.275	-14.553	60.000	10.172	QP
8		*	20.186	38.936	28.764	-11.064	50.000	10.172	AV
9			26.074	44.088	33.751	-15.912	60.000	10.337	QP
10			26.074	37.131	26.794	-12.869	50.000	10.337	AV
11			28.982	44.284	33.851	-15.716	60.000	10.433	QP
12			28.982	36.037	25.604	-13.963	50.000	10.433	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **WIRELESS ACCESS POINT**
FCC ID: TK4WPJ344 is in compliance with Part 15C of the FCC Rules.

The End