

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Test Report for FCC

FCC ID :TKWBSA2-OMPW

Report Number		ESTF151511-001		
Applicant	Company name	Suprema Inc.		
	Address	16F Parkview Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea		
	Telephone	82-31-783-4505		
	Contact person	Dongmok Shin		
Product	Product name	Biostation A2		
	Model No.	BSA2-OMPW	Manufacturer	Suprema Inc.
	Serial No.	None	Country of origin	KOREA
Test date	2015-10-14 ~ 2015-11-12		Date of issue	25-Nov-15
Testing location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea			
Standard	FCC PART 15 Subpart C (15.247):2010 , ANSI C 63.4(2009) , KDB 558074 D01(2014)			
Measurement facility registration number		659627		
Tested by	Senior Engineer K.H. Chung		(Signature)	
Reviewed by	Engineering Manager J.M.Yang		(Signature)	
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable			
* Note - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned				

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. DTS bandwidth	10
5.1 Test procedure	10
5.2 Test instruments and measurement setup	10
5.3 Measurement results	11
5.4 Trace data	12
6. Maximum Peak Output Power	20
6.1 Test procedure	20
6.2 Test instruments and measurement setup	20
6.3 Measurement results	20
7. Maximum conducted (average) output power	22
7.1 Test procedure	22
7.2 Test instruments and measurement setup	22
7.3 Measurement results	22
7.4 Trace data(Peak, Average).....	24
8. Maximum power spectral density level in the fundamental emission	36
8.1 Test procedure	36
8.2 Test instruments and measurement setup	36
8.3 Measurement results	36
8.4 Trace data	38
9. Emissions in non-restricted frequency bands	46
9.1 Test procedure	46
9.2 Test instruments and measurement setup	46
9.3 Measurement results	46
9.4 Trace data of band-edge & out of emission	48
10. Measurement of radiated emission	60
10.1 Measurement equipment	60
10.2 Environmental conditions	60
10.3 Measurement Instrument setting for Radiated Emission	61
10.4 Test Data.....	62
11. Measurement of conducted emission	78
11.1 Measurement equipment	78
11.2 Environmental conditions	78
11.3 Test Data.....	79
12. Photographs of test setup	80
12.1.Setup for Radiated Test : (30 ~ 1 000) MHz	80
12.2.Setup for Radiated Test : Above GHz	81
12.3. Setup for Conducted Test : (0.15 ~ 30) MHz.....	82
12.4. Photographs of EUT	83

Appendix 1, 2. Special diagram

Appendix 2. Antenna Requirement

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do 467-811, R. O. Korea

1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety
and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC
requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under
APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

2. Description of EUT

2.1 Summary of Equipment Under Test

Modulation Type	: CCK, OFDM
Transfer Rate	: 11 Mbps , 55 Mbps
Number of Channel	: 11 ch
PEAK Output Power	: 13.80 dBm
Rating	: DC : 6.0 Vd.c, 0.5 A, Max. 1 A , POE : 48 Vd.c
Receipt Date	: 14-Sep-15
X-tal list(s) or Frequencies generated	: The highest operating frequency is 2 462 MHz

2.2 General descriptions of EUT

Category	Feature	Specification
General	Biometric	Fingerprint
	LFD	Supported
	RF Option	2.4 GHz, 13.56 MHz Mifare/DesFire/DesFire EV1/Felica/NFC, 13.56 MHz iClass SE
Storage capacity	Max. User (1:1)	500,000
	Max. User (1:N)	100,000
	Max. Template (1:1)	1,000,000
	Max. Template (1:N)	200,000
	Max. Text Log	5,000,000
	Max. Image Log	50,000
Interface	Wi-Fi	Supported
	TCP/IP	Supported
	RS-485	1ch Host or Slave (Selectable)
	RS-232	Supported
	Wiegand	1ch Input, 1ch Output
	TTL input	1ch Input
	Relay	2 Relay
	USB	USB 2.0 (Host)
Relay	Voltage	Max. 24 V DC
	Current	0.5 A, Max. 1.A
Hardware	CPU	1.0 GHz
	Memory	8 GB Flash + 1 GB RAM
	LCD	5" color touch LCD
	LED	Multiple colors
	Sound	24 bit/Voice DSP (echo cancel)
	Operating temperature	-20°C ~ 50°C
	Temper	Supported
	Power	9 V ~ 18 V
	PoE	Supported
	Dimension (W x H x D mm)	155 x 155 x 40
	Certificates	CE, FCC, KC, RoHS, REACH, WEEE

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

3. Test Standards

Test Standard : FCC PART 15 Subpart C (15.247) : 2010

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.10 (2009) & KDB558074 D01(2014)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

Summary of Test Results

Applied Standard : 47 CFR Part 15 Subpart C				remark
Standard	Test Type	Result	Remark	Limit
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.205 & 15.209	Restricted band / Intentional Radiated Emission	Pass	Meet the requirement	
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement	Min. 500 kHz
	99 % Bandwidth			
15.247(b)(3)	Maximum Peak/average output power	Pass	Meet the requirement	Max. 30 dBm
15.247(c)	Transmitter Radiated Emission	Pass	Meet the requirement	Table 15.209
15.247(e)	Power Spectral Density	Pass	Meet the requirement	Max. 8 dBm
15.247(d)	Band Edge Measurement	Pass	Meet the requirement	20 dB less

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

4. Measurement Condition

4.1 EUT Operation

a. Channel

Ch.	Frequency	Ch.	Frequency
1	2 412 MHz	7	2 442 MHz
2	2 417 MHz	8	2 447 MHz
3	2 422 MHz	9	2 452 MHz
4	2 427 MHz	10	2 457 MHz
5	2 432 MHz	11	2 462 MHz
6	2 437 MHz		

b. Measurement Channel : WLAN : Low(2 412 MHz), Middle(2 437 MHz), High(2 462 MHz)

c. Test Mode : Continuous Output, CCK, OFDM

d. Test rate : 11 Mbps, 54 Mbps



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

4.2 EUT Operation


-The EUT was tested, tested under transmission/receiving

condition continuously between the EUT

1. Check normal communication with RF OUT Frequency(13.56 MHz / 2.4 GHz Band).

2. The EUT is connected to the external wireless Spectrum Analyzer operation test.

4.3 Configuration and Peripherals

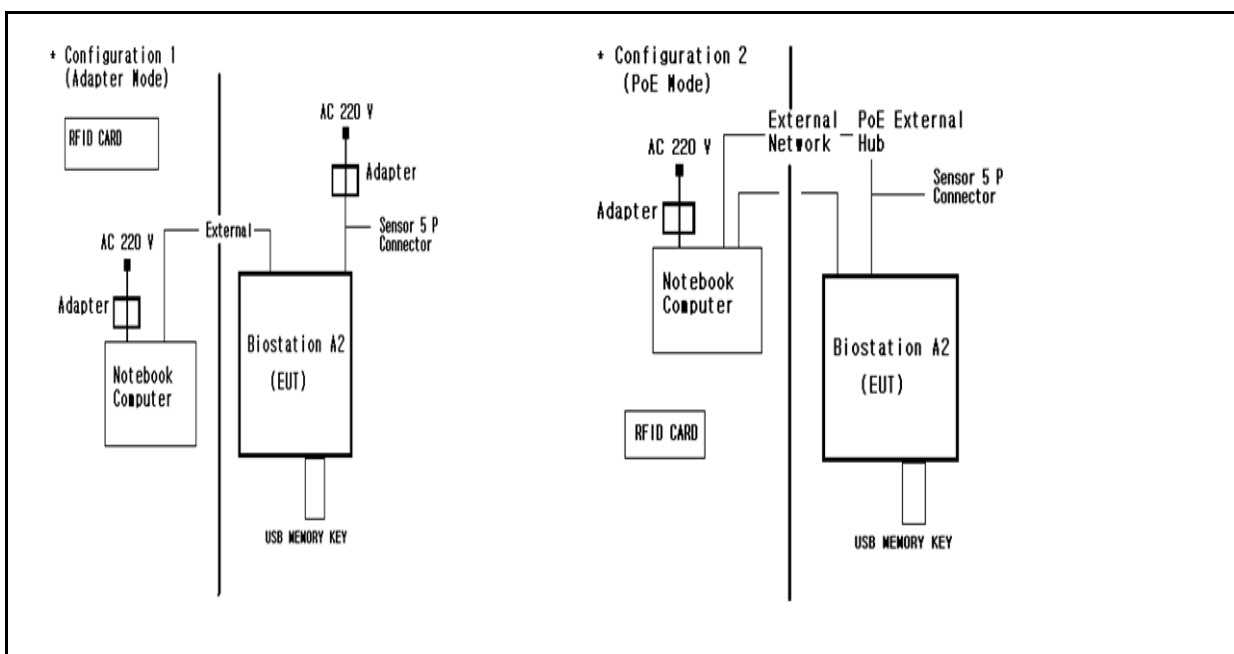



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

4.4 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Biostation A2	BSA2-OMPW	NONE	Suprema Inc.	EUT
Adapter	JPW128KA1200N05	NONE	BridgePower Corp.	
USB Memory Key	NONE	NONE	NONE	

4.5 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Biostation A2	WIRELESS (2.4 GHz)	Spectrum Analyzer (External)	WIRELESS (2.4 GHz)	-	-	
Biostation A2	DC POWER	Adapter	AC Line	2.0	Shielded	
Biostation A2	13.56 MHz	RFID CARD	13.56	-	-	
Biostation A2	USB	USB Memory Key	USB	-	-	
Biostation A2	PoE(LAN)	PoE HUB (External Network)	LAN	20.0	Unshielded	



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

4.6 DUTY CYCLE OF TEST SIGNAL


Duty cycle is < 98%, duty factor shall be considered.

duty cycle = 100% , duty factor = $10 \cdot \log(1/1) = 0$

CCK

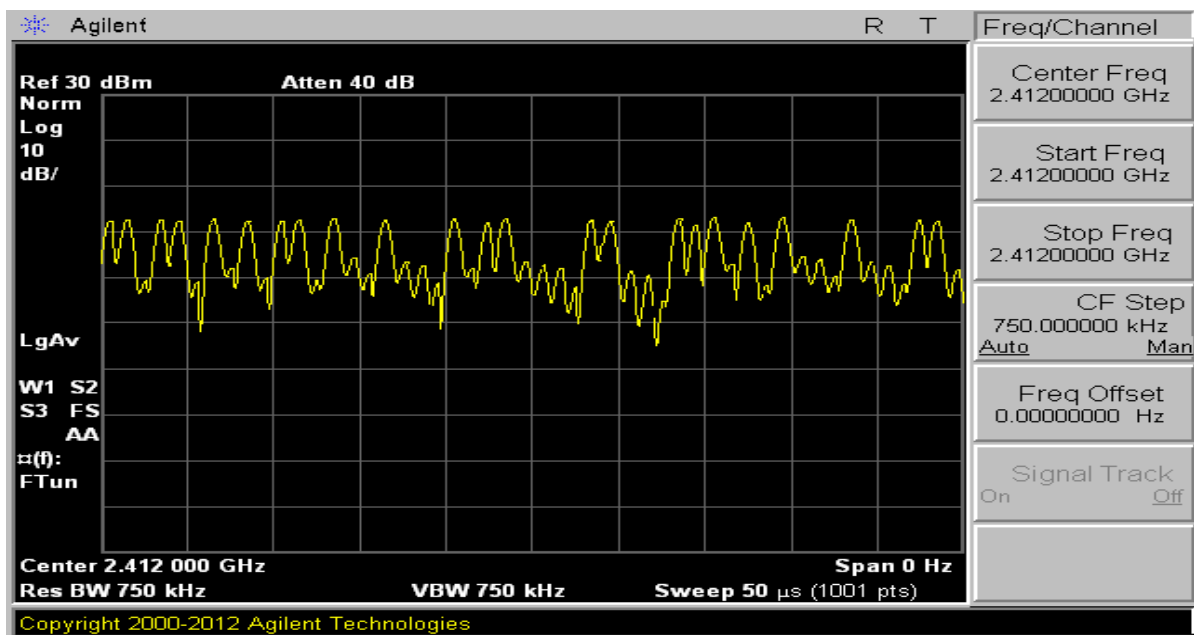

OFDM

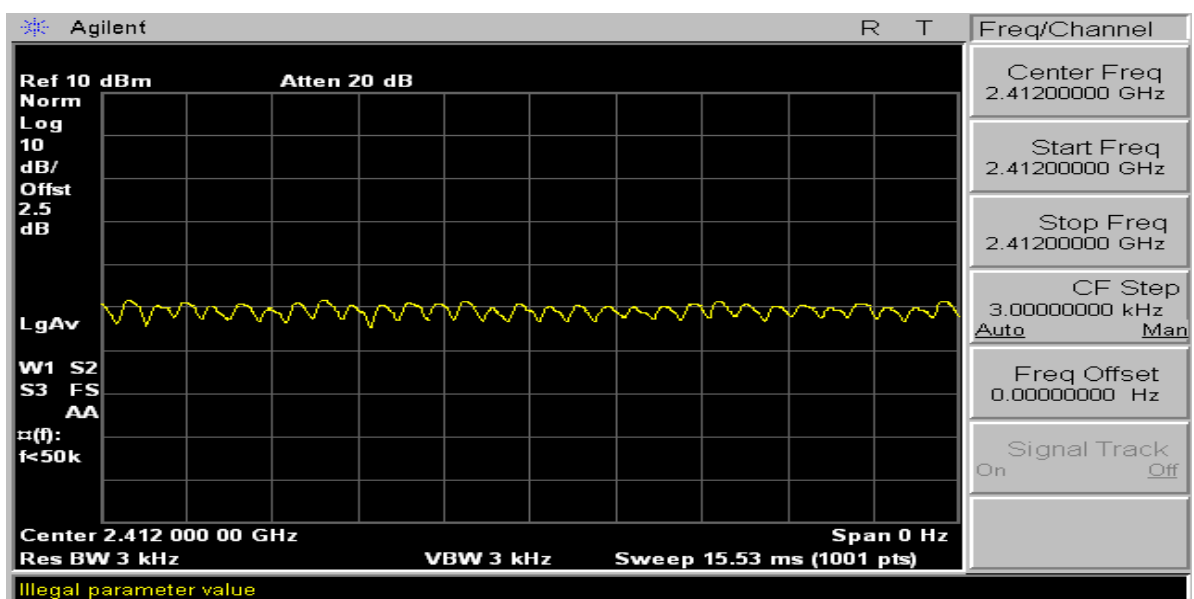

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5. DTS bandwidth

5.1 Test procedure

558074 D01 DTS Meas Guidance v03v02 8.2 Option 2 :The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that

5.2 Test instruments and measurement setup

The spectrum analyzer is set to as following.

. RBW= 100 KHz . VBW $\geq$ 3 x RBW

. Span= 20 MHz . Sweep= suitable duration based on the EUT specification.

Limits : FCC § 15.247(a)(2)

6dB Bandwidth Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	—	
—Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 2.5 dB	—	

5.3 Measurement results – Adapter

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	24.0 °C, 44.0 % R.H.
INPUT POWER	6.0 Vd.c.		

MODE – CCK

Channel Frequency (MHz)	Emission bandwidth (MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2 412	15.08	10.07	0.5	PASS
2 437	15.10	10.09	0.5	PASS
2 462	15.06	10.09	0.5	PASS

MODE – OFDM

Channel Frequency (MHz)	Emission bandwidth (MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2 412	16.48	16.52	0.5	PASS
2 437	16.49	16.54	0.5	PASS
2 462	16.50	16.57	0.5	PASS

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5.3 Measurement results – POE

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	24.0 °C, 46.0 % R.H.
INPUT POWER	48.0 Vd.c.		

MODE – CCK

Channel Frequency (MHz)	Emission bandwidth (MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2 412	15.08	10.07	0.5	PASS
2 437	15.10	10.09	0.5	PASS
2 462	15.06	10.09	0.5	PASS


MODE – OFDM

Channel Frequency (MHz)	Emission bandwidth (MHz)	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2 412	16.48	16.52	0.5	PASS
2 437	16.49	16.54	0.5	PASS
2 462	16.50	16.57	0.5	PASS


**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5.4 Trace data – Adapter (ch_1)

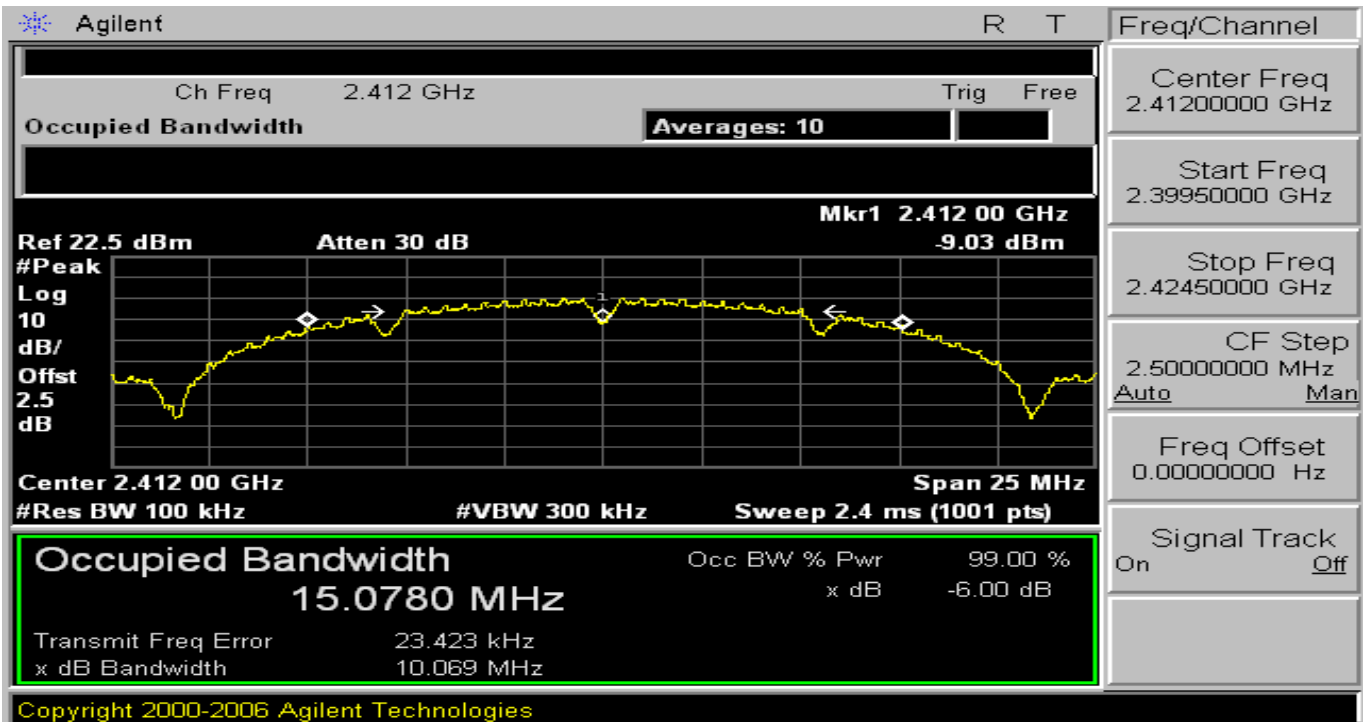

(ch_6)

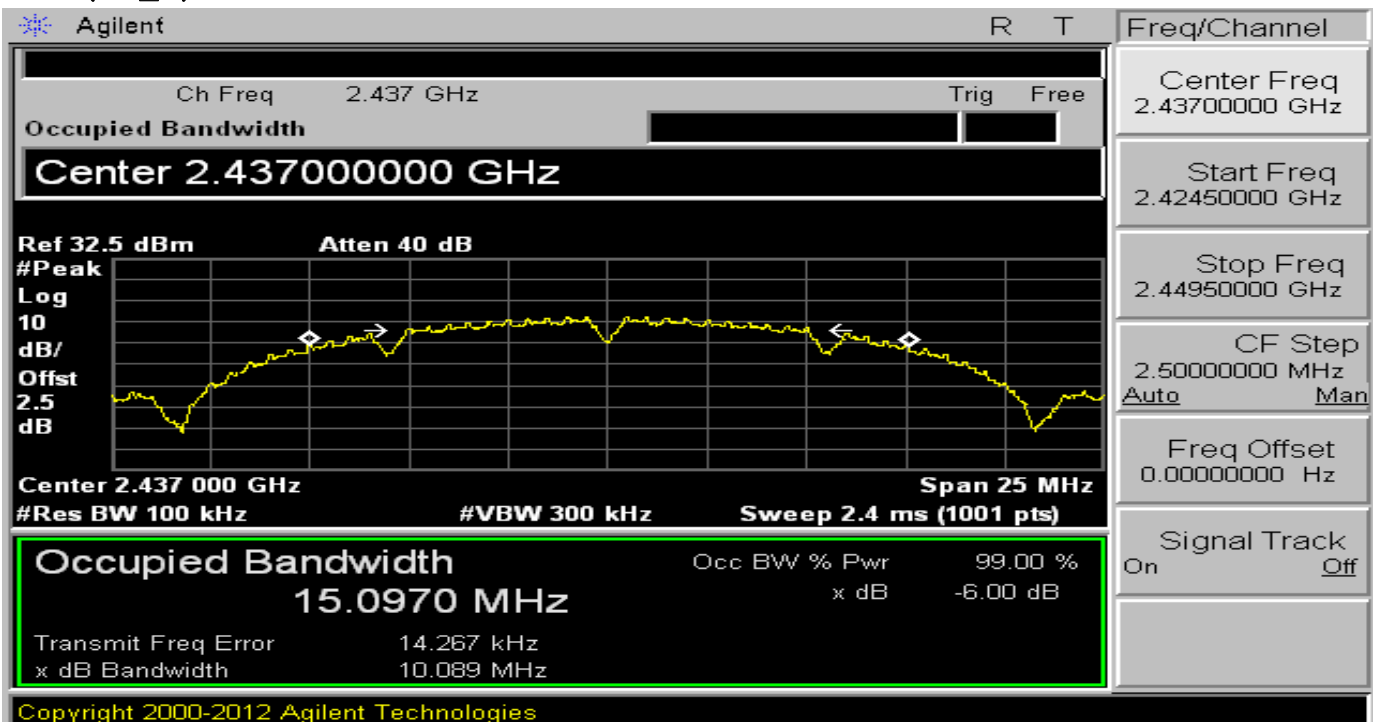

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)






Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5.4 Trace data – Adapter (ch_1)

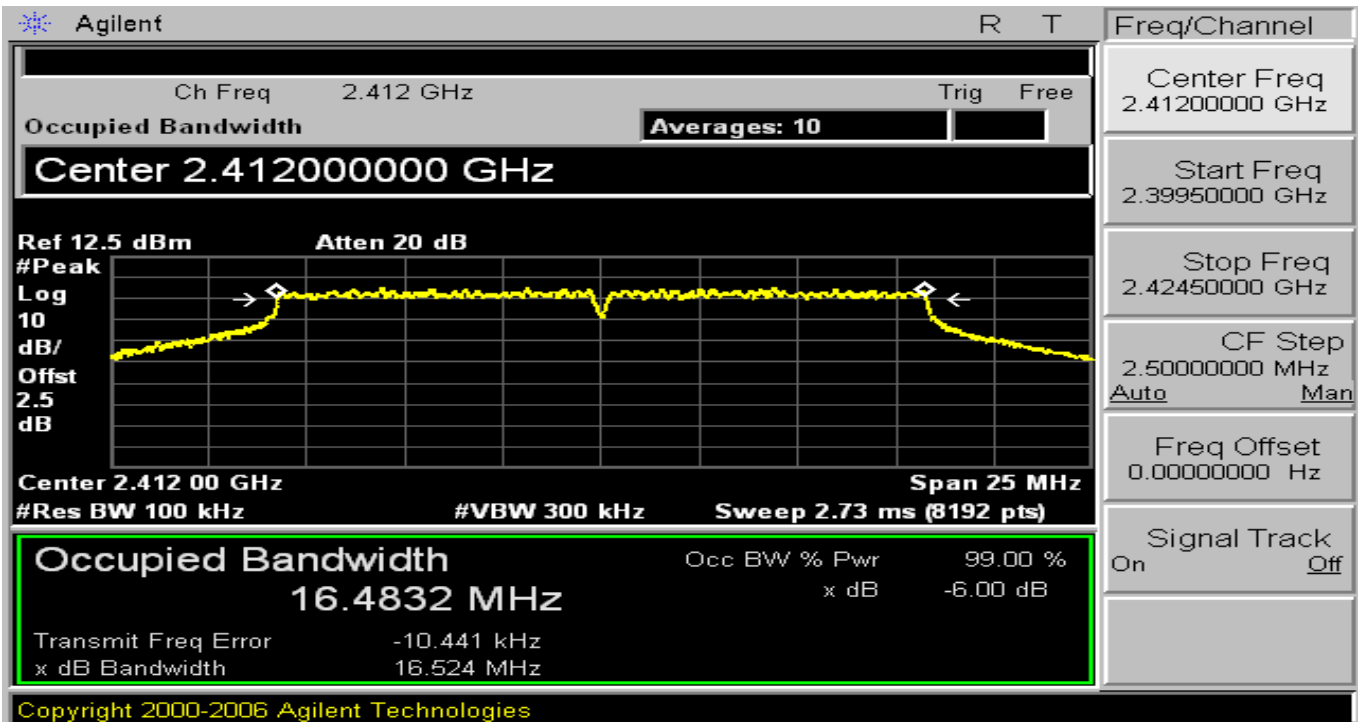

(ch_6)

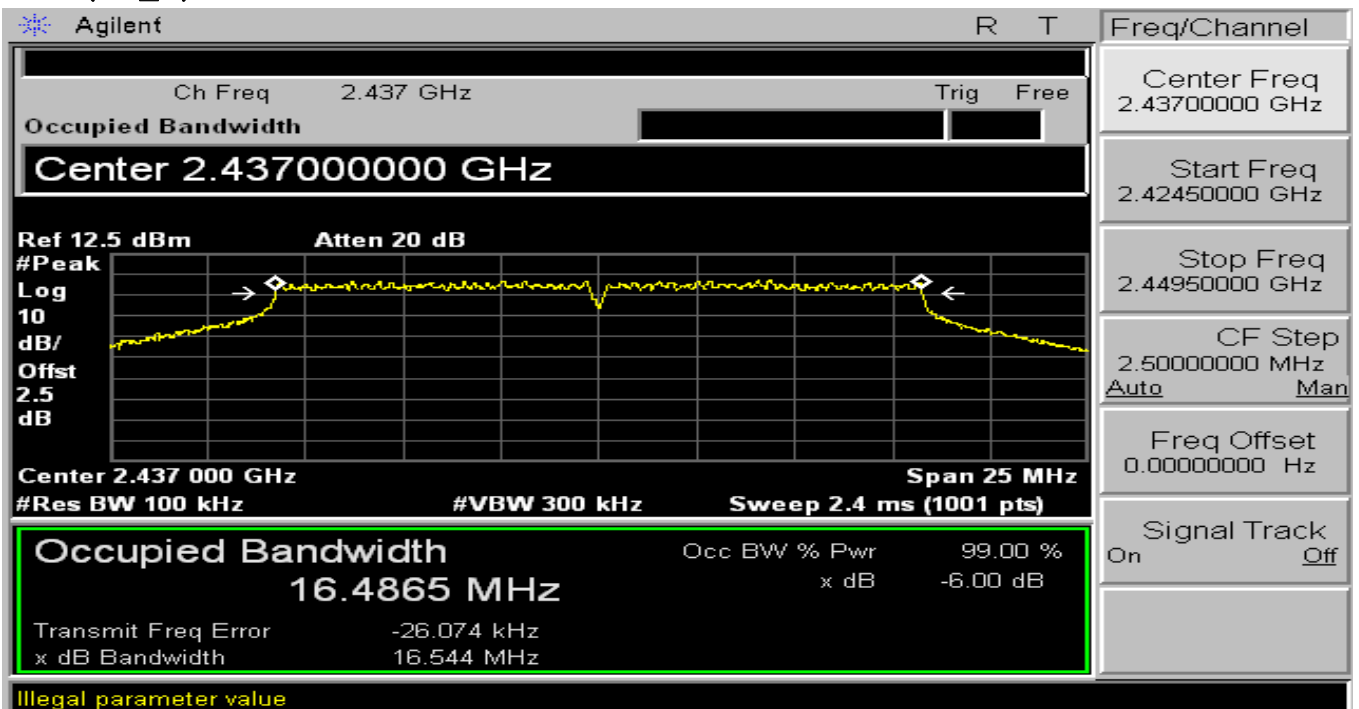



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)






Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5.4 Trace data – POE

(ch_1)

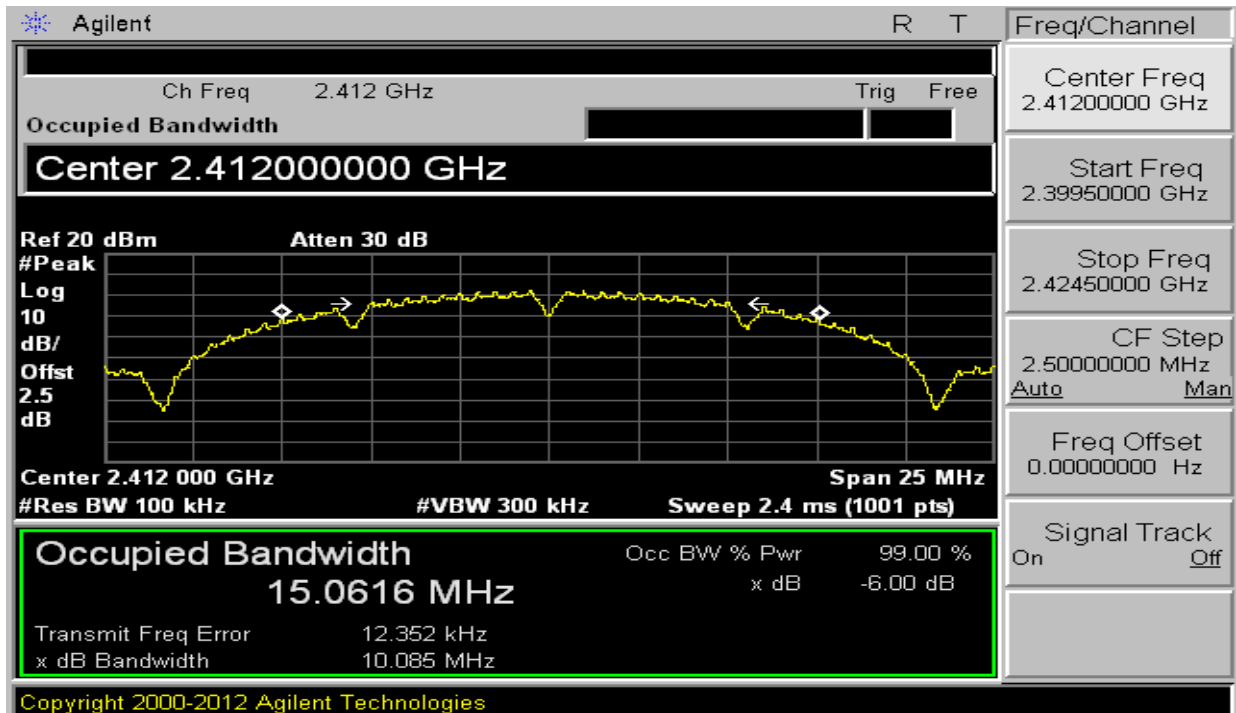

(ch_6)






Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

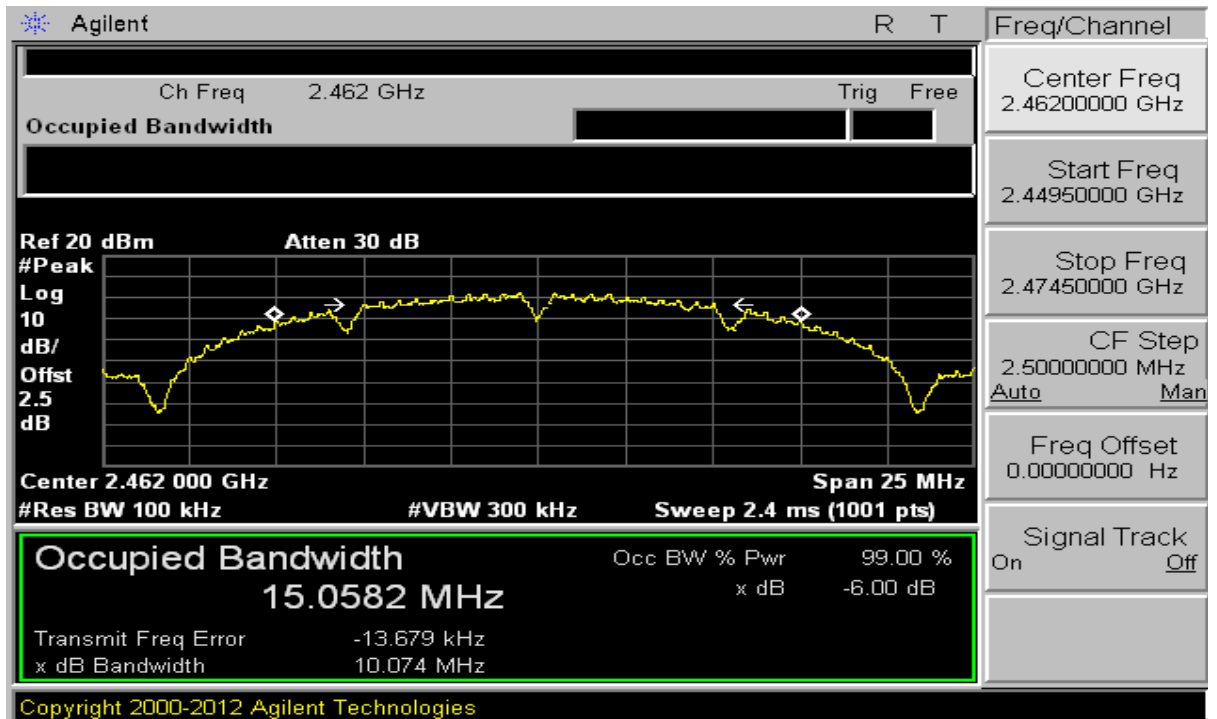


**Estech Co., Ltd.**


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

5.4 Trace data – POE (ch_1)

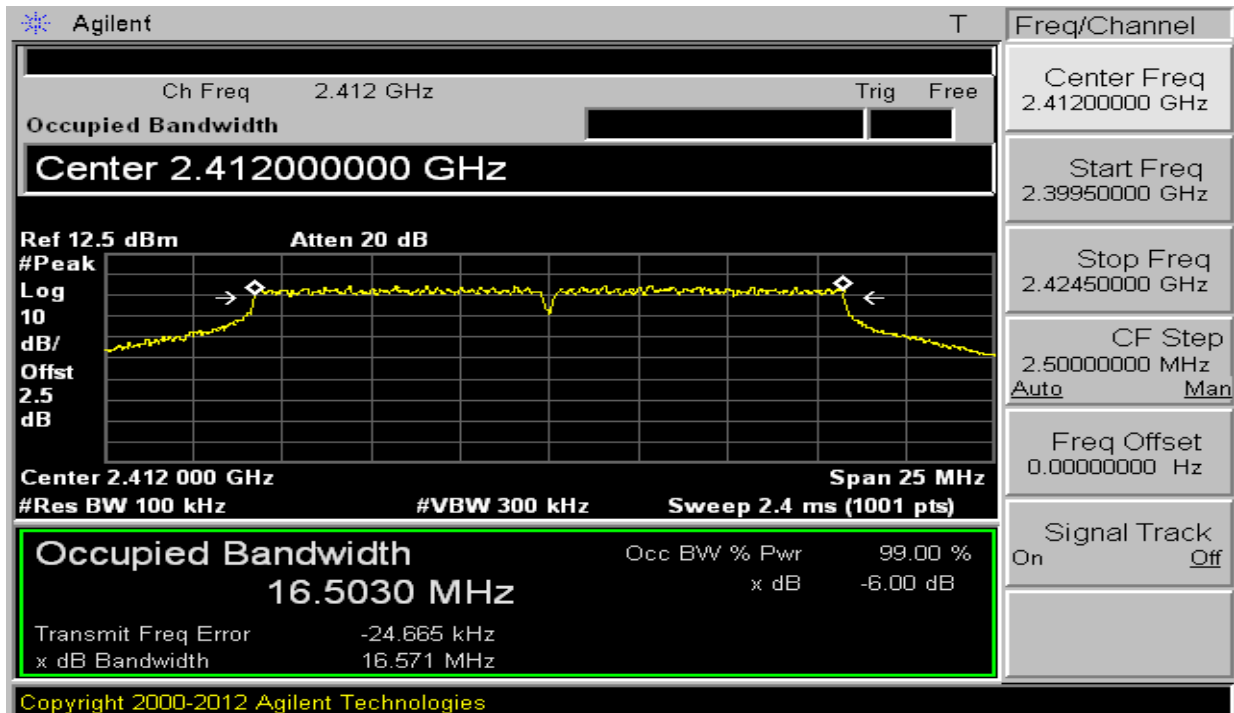

(ch_6)

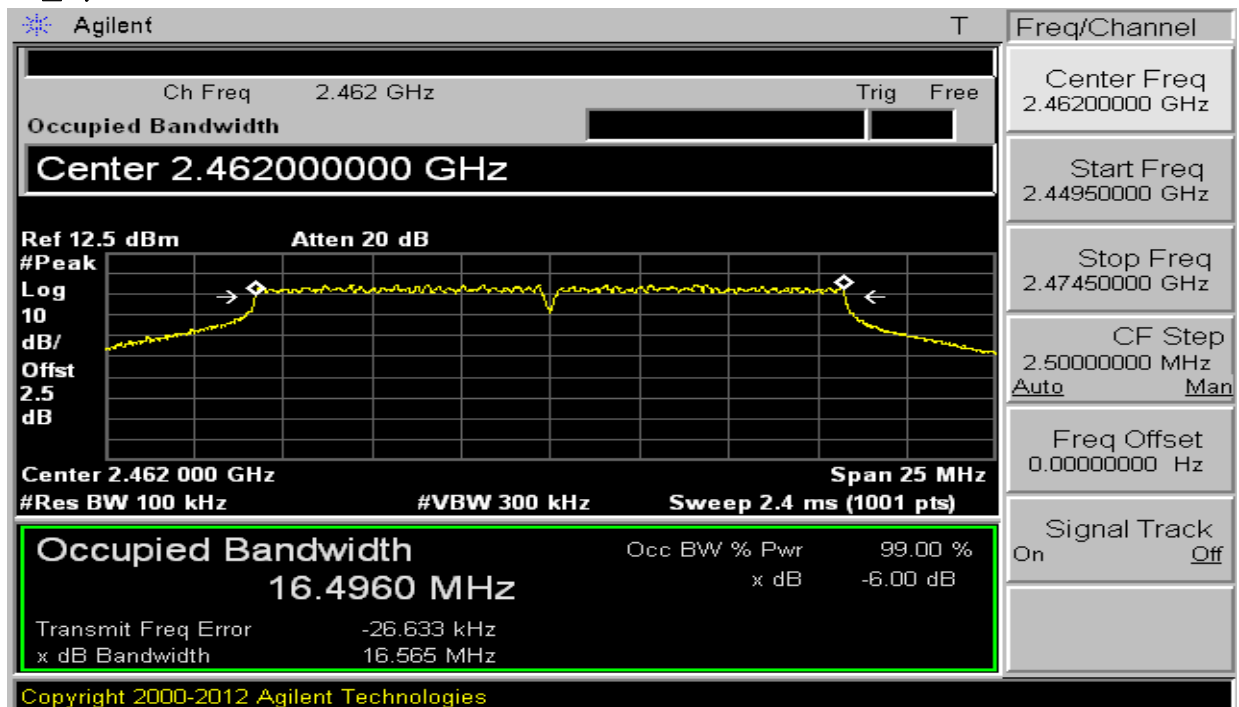




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

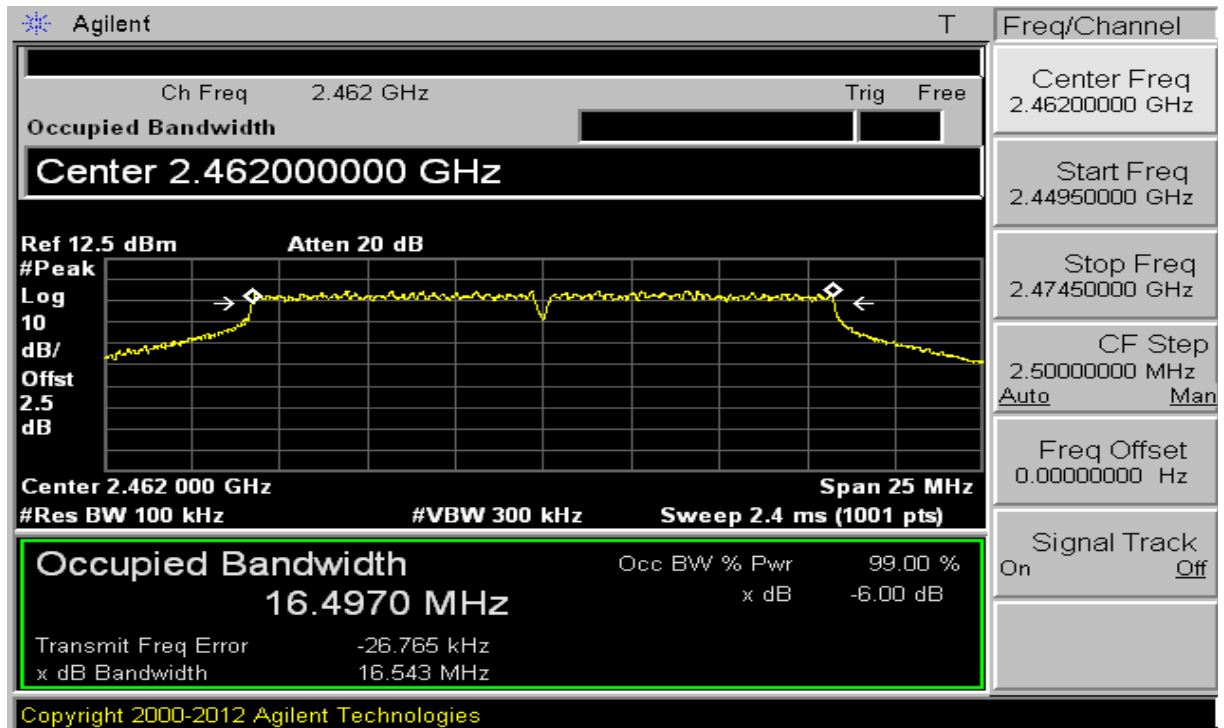

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

6. Maximum peak conducted output power

6.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r02 9.1.1 Integrated band power method

6.2 Test instruments and measurement setup

- Set the RBW = 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Limits : FCC § 15.247

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 2.5 dB	–	

6.3 Measurement results – Adapter

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, GFSK	ENVIRONMENTAL CONDITION	22.0 °C, 48.0 % R.H.
INPUT POWER	6.0 Vd.c.		

MODE – CCK

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(W)		
1	2 412	PEAK	13.80	0.0240	30.0	PASS
6	2 437	PEAK	12.94	0.0197	30.0	PASS
11	2 462	PEAK	13.09	0.0204	30.0	PASS

MODE – OFDM

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(W)		
1	2 412	PEAK	12.24	0.0167	30.0	PASS
6	2 437	PEAK	11.90	0.0155	30.0	PASS
11	2 462	PEAK	12.51	0.0178	30.0	PASS



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

6.3 Measurement results – POE

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, GFSK	ENVIRONMENTAL CONDITION	23.0 °C, 48.0 % R.H.
INPUT POWER	48.0 Vd.c.		

MODE – CCK

CHANNEL	Channel requency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(W)		
1	2 412	PEAK	13.25	0.0211	30.0	PASS
6	2 437	PEAK	12.94	0.0197	30.0	PASS
11	2 462	PEAK	12.96	0.0198	30.0	PASS

MODE – OFDM

CHANNEL	Channel requency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(W)		
1	2 412	PEAK	12.50	0.0178	30.0	PASS
6	2 437	PEAK	12.89	0.0195	30.0	PASS
11	2 462	PEAK	12.56	0.0180	30.0	PASS

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

7. Maximum conducted (average) output power**7.1 Test procedure**

KDB 558074 D01 DTS Meas Guidance V03r02 9.2.2.4 Method AVGSA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction)

7.2 Test instruments and measurement setup

- Measure the duty cycle, x , of the transmitter output signal as described in 6.0.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run".
- Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW
- Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25 %.

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	-	
-Spectrum Analyzer $\Leftrightarrow$ EUT	Loss: 2.5 dB	-	

7.3 Measurement results – Adapter

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, GFSK	ENVIRONMENTAL CONDITION	24.0 °C, 44.0 % R.H.
INPUT POWER	6.0 Vd.c.		

MODE – CCK

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(W)
		Detector	(dBm)	Duty Cycle		
1	2 412	AVG	10.88	1.00	10.9	0.0122
6	2 437	AVG	10.86	1.00	10.9	0.0122
11	2 462	AVG	10.79	1.00	10.8	0.0120

MODE – OFDM

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(W)
		Detector	(dBm)	Duty Cycle		
1	2 412	AVG	9.37	1.00	10.4	0.0109
6	2 437	AVG	9.95	1.00	11.0	0.0124
11	2 462	AVG	9.79	1.00	10.8	0.0120

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

7.3 Measurement results – PoE

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, GFSK	ENVIRONMENTAL CONDITION	24.0 °C, 43.0 % R.H.
INPUT POWER	48.0 Vd.c.		

MODE – CCK

CHANNEL	Channel requency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(W)
		Detector	(dBm)	Duty Cycle		
1	2 412	AVG	10.82	1.00	10.8	0.0121
6	2 437	AVG	10.85	1.00	10.9	0.0122
11	2 462	AVG	10.41	1.00	10.4	0.0110

MODE – OFDM

CHANNEL	Channel requency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(W)
		Detector	(dBm)	Duty Cycle		
1	2 412	AVG	9.78	1.00	10.8	0.0120
6	2 437	AVG	10.49	1.00	11.5	0.0141
11	2 462	AVG	10.60	1.00	11.6	0.0145




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

7.4 Trace data (Peak, Average) – CCK (ch_1) (Peak)

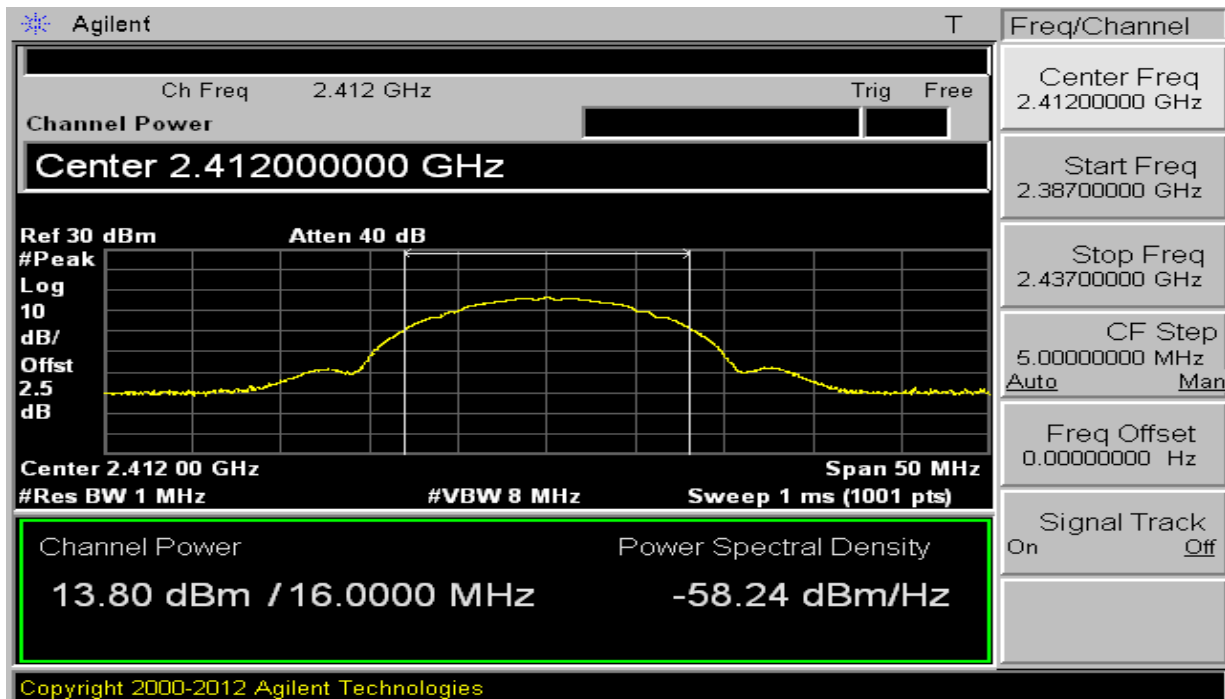

(Avg)

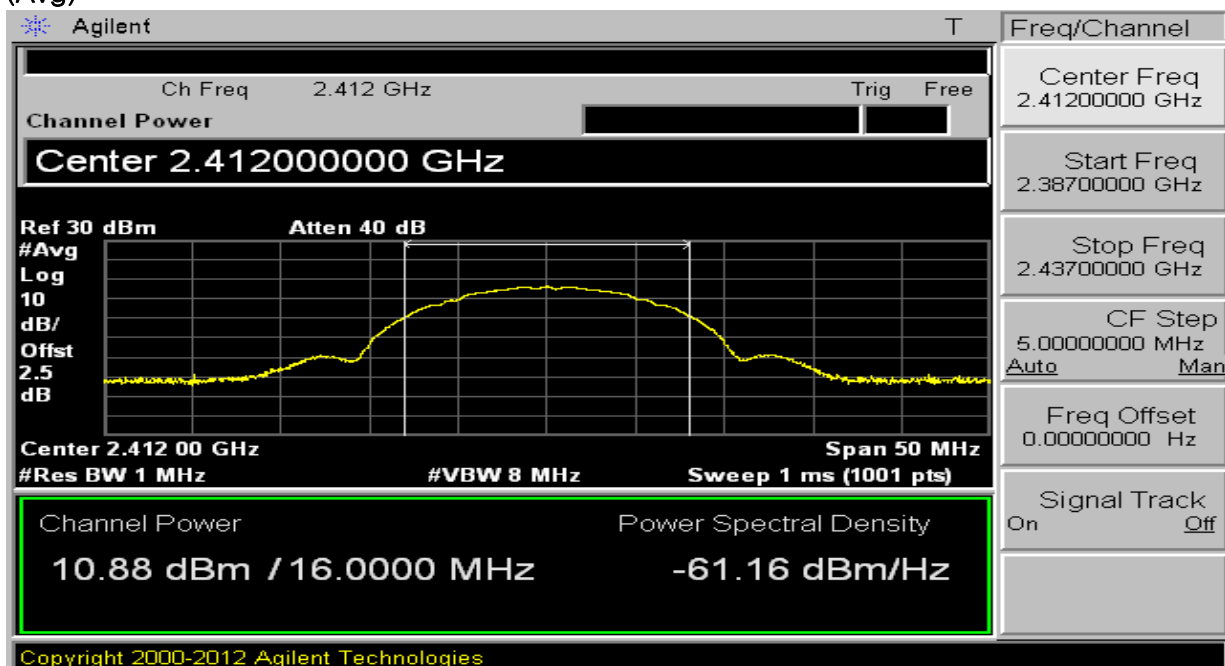


**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_6)

(Peak)

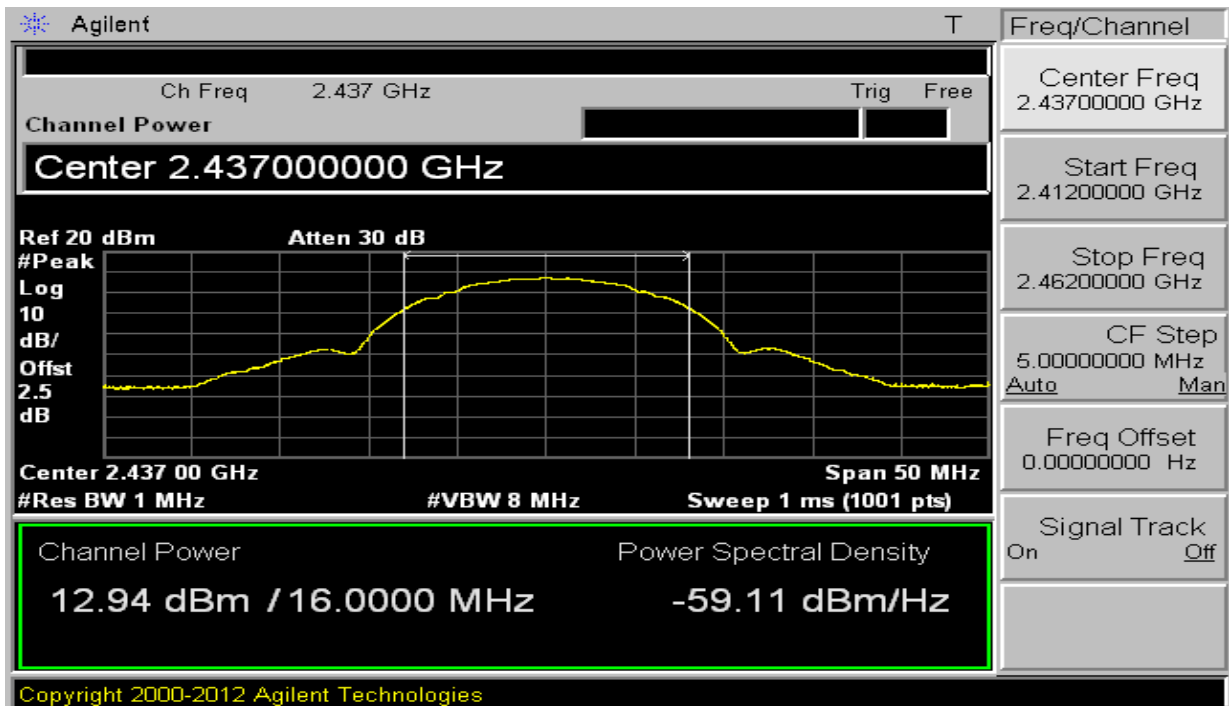

(Avg)

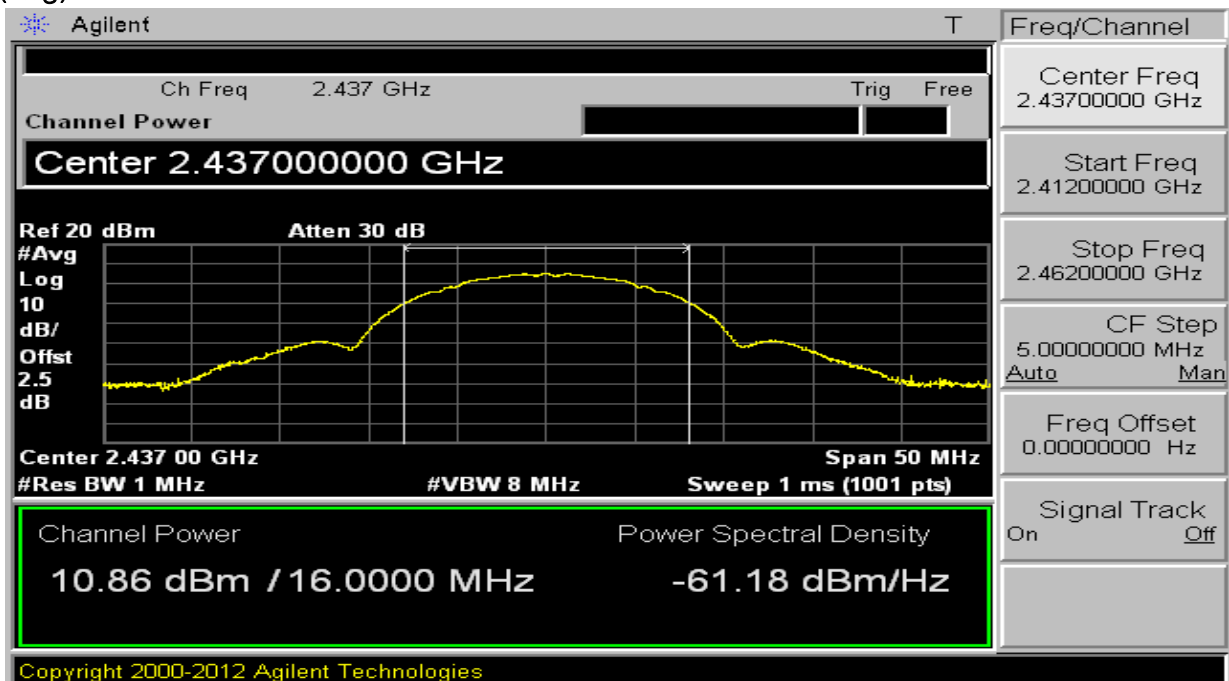


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

(Peak)

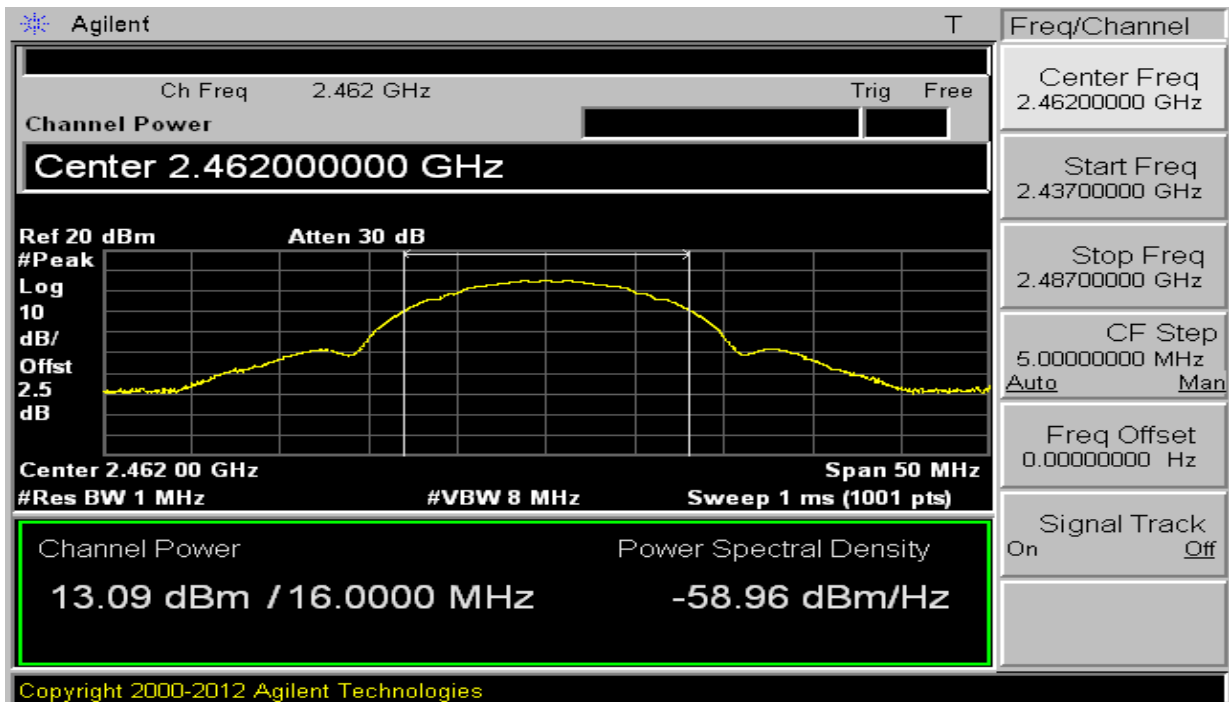

(Avg)

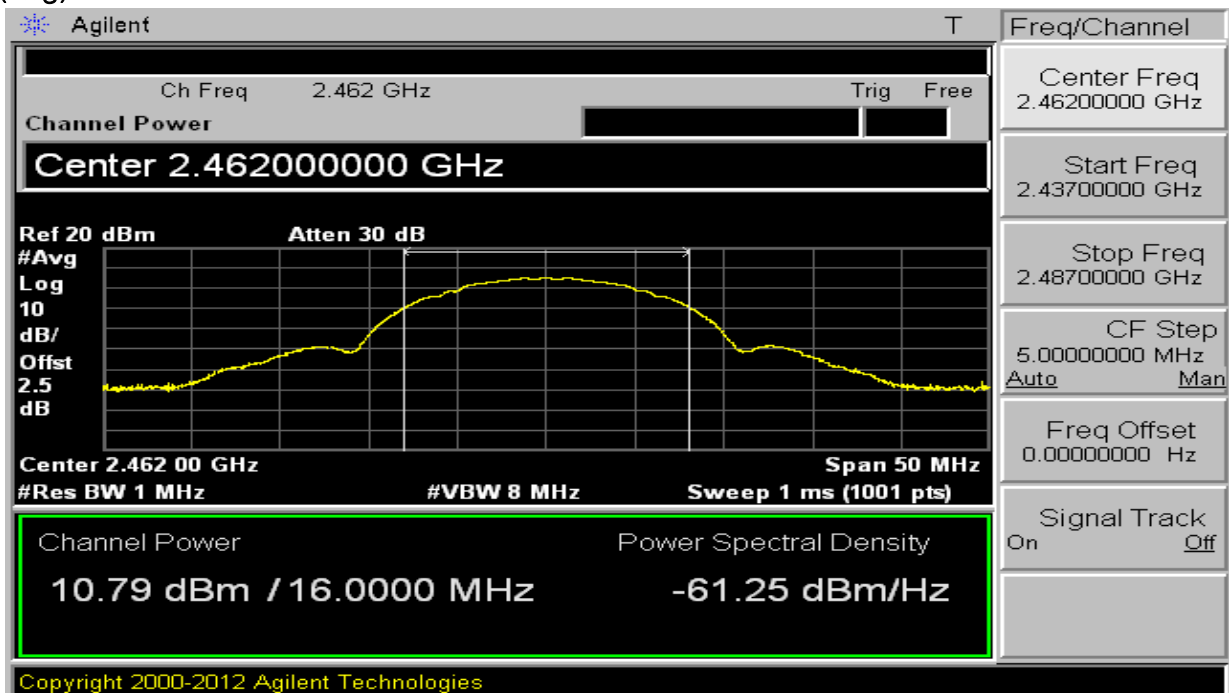



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


7.4 Trace data (Peak, Average) – OFDM

(ch_1)

(Peak)

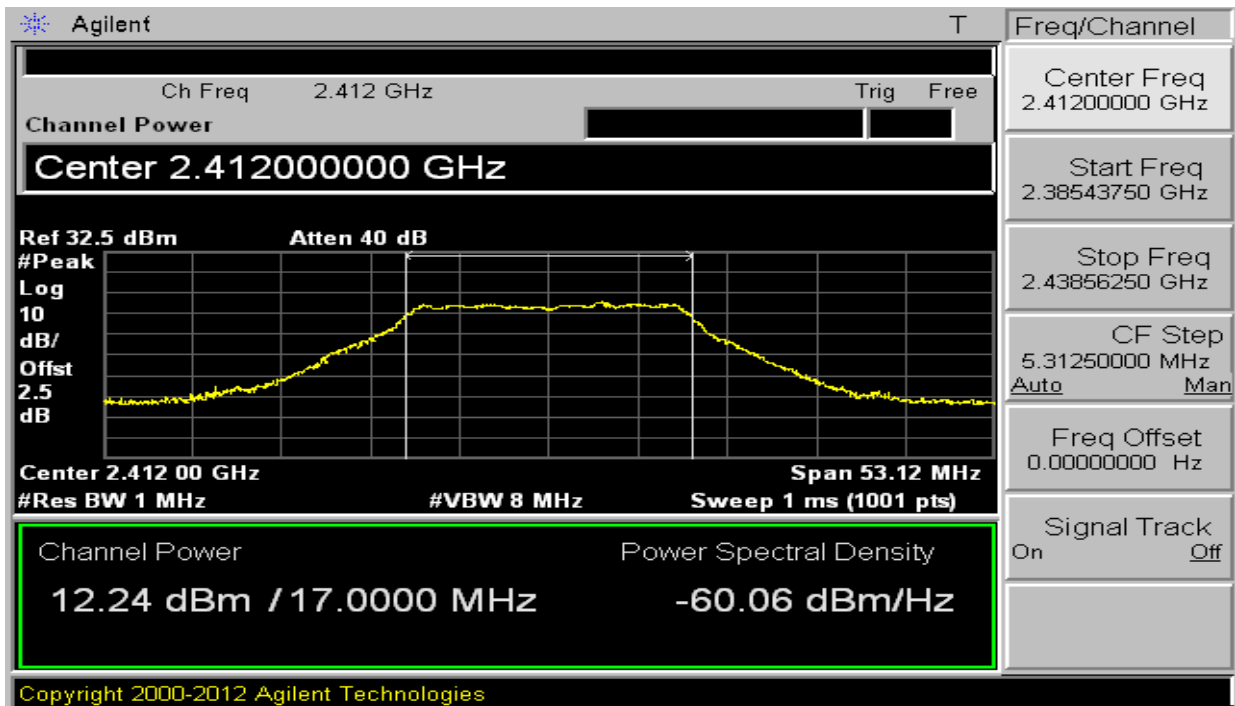

(Avg)

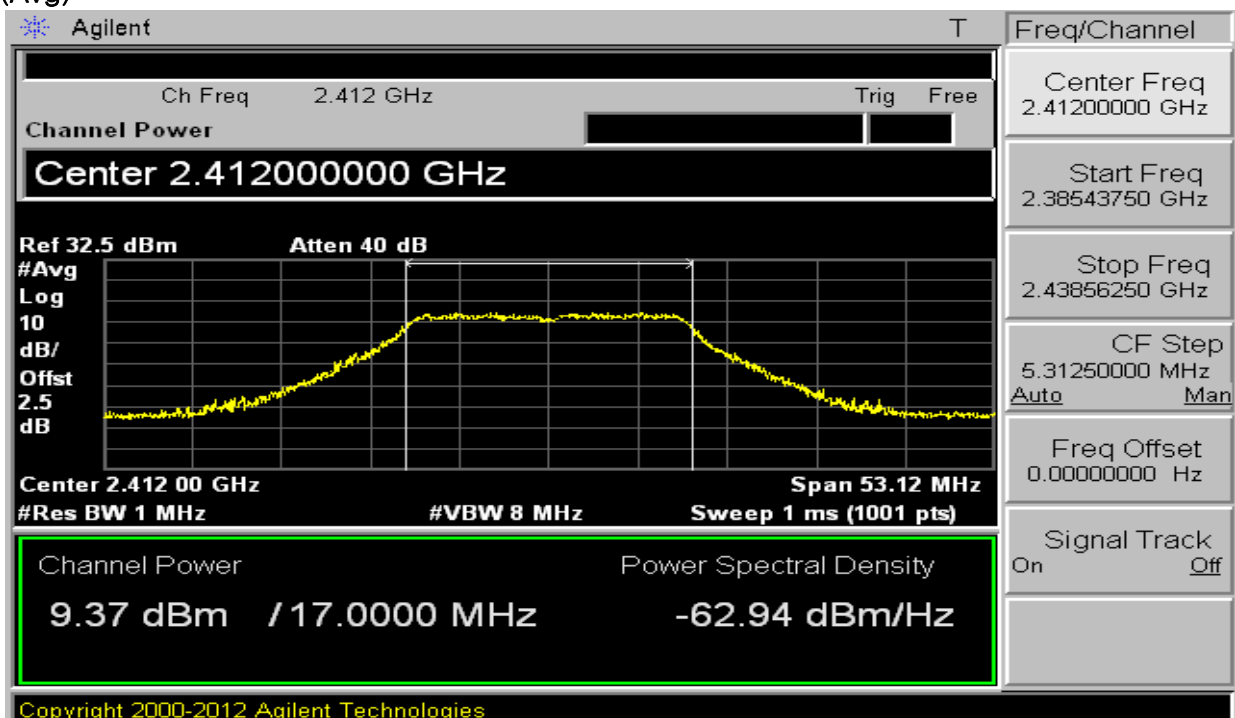


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_6)

(Peak)

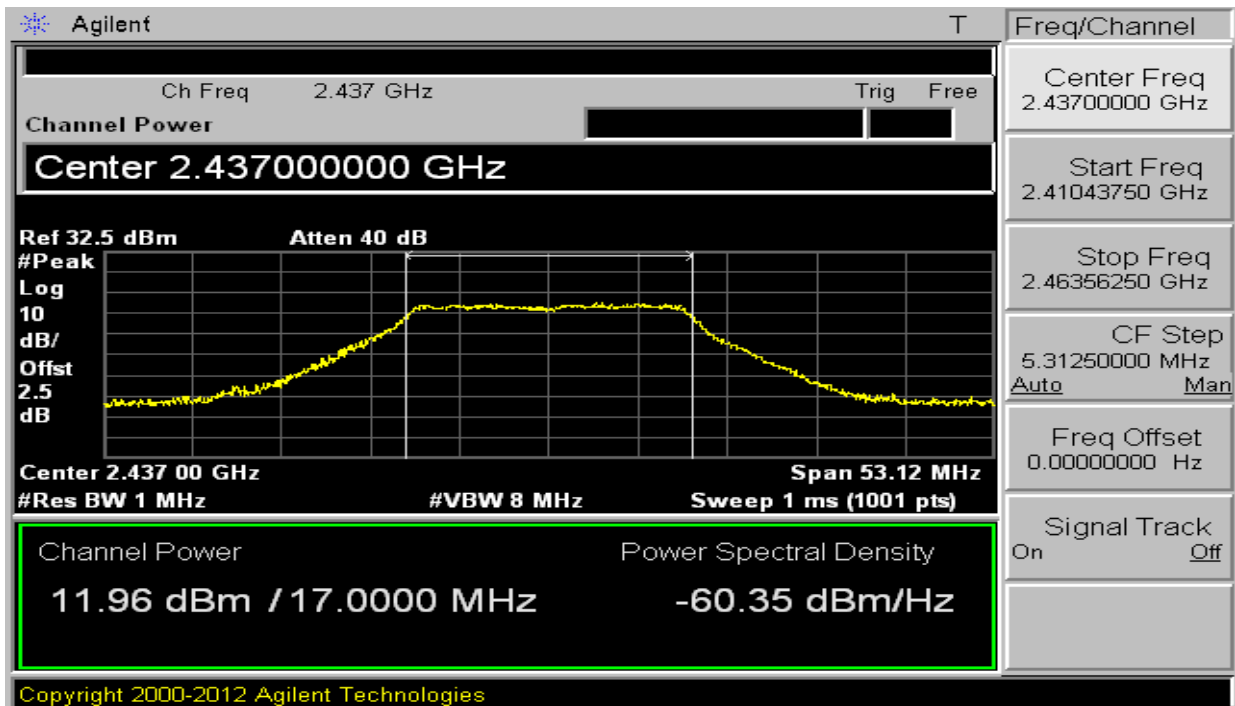

(Avg)

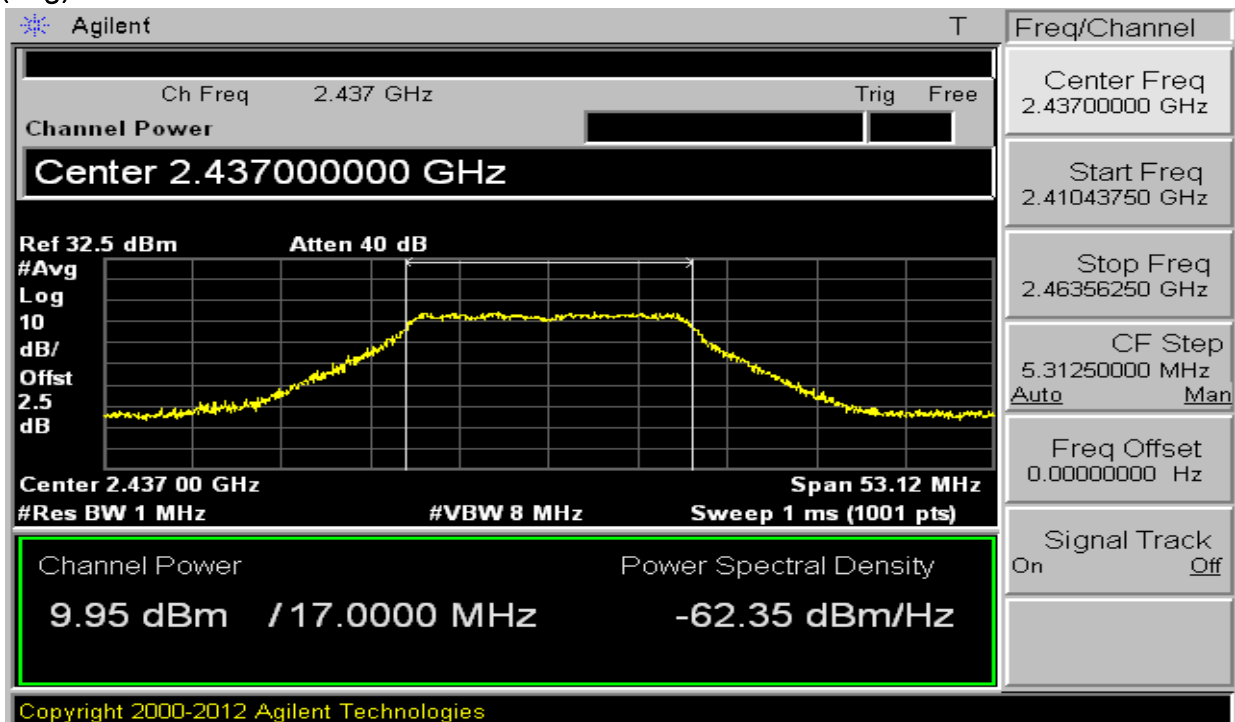


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

(Peak)

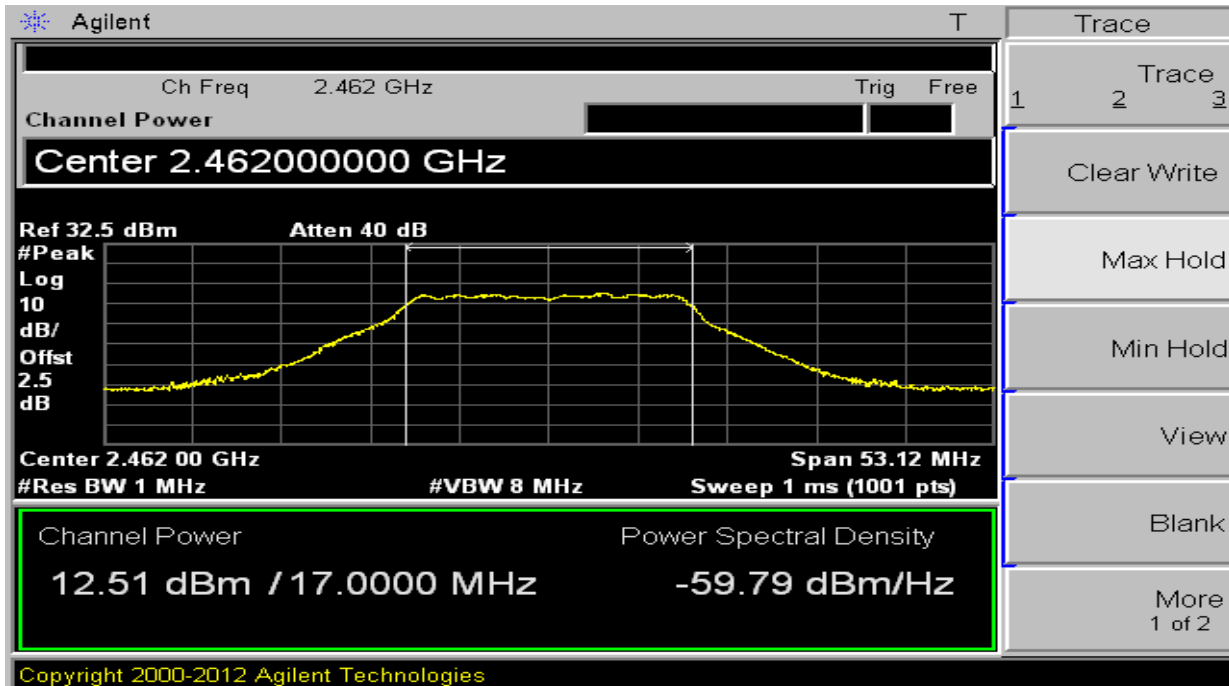

(Avg)

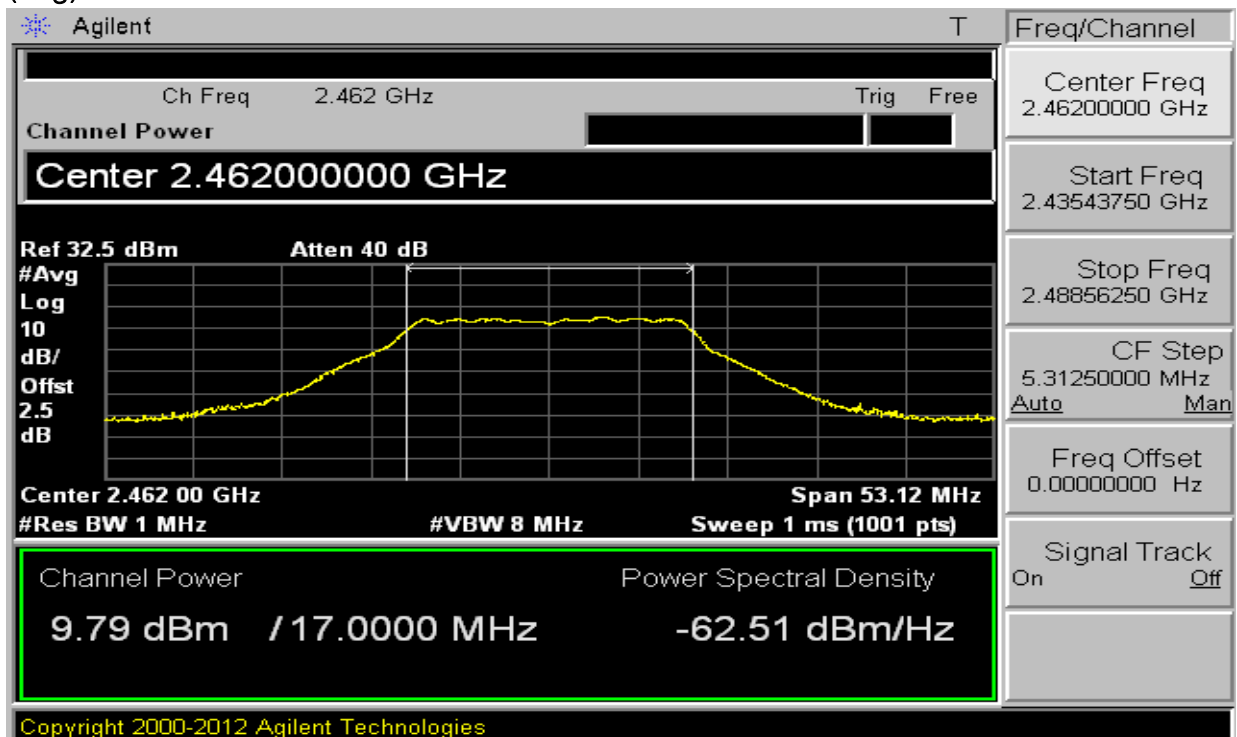




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

7.4 Trace data (Peak, Average) – CCK (ch_1) (Peak)

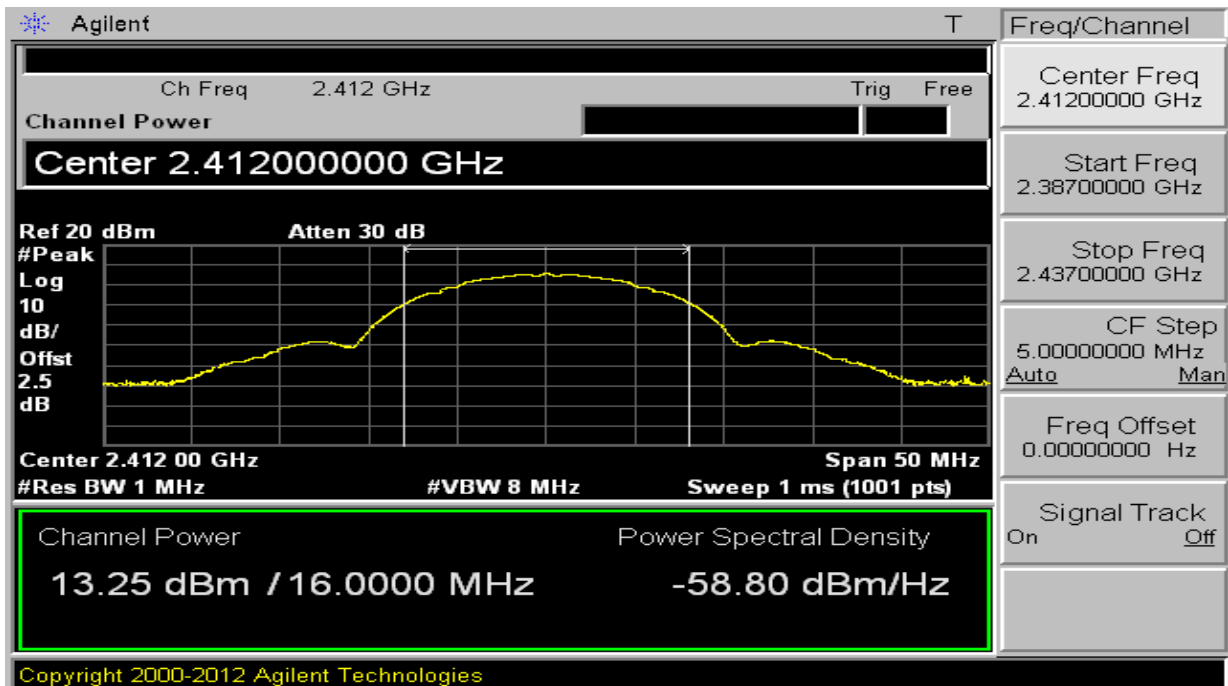

(Avg)

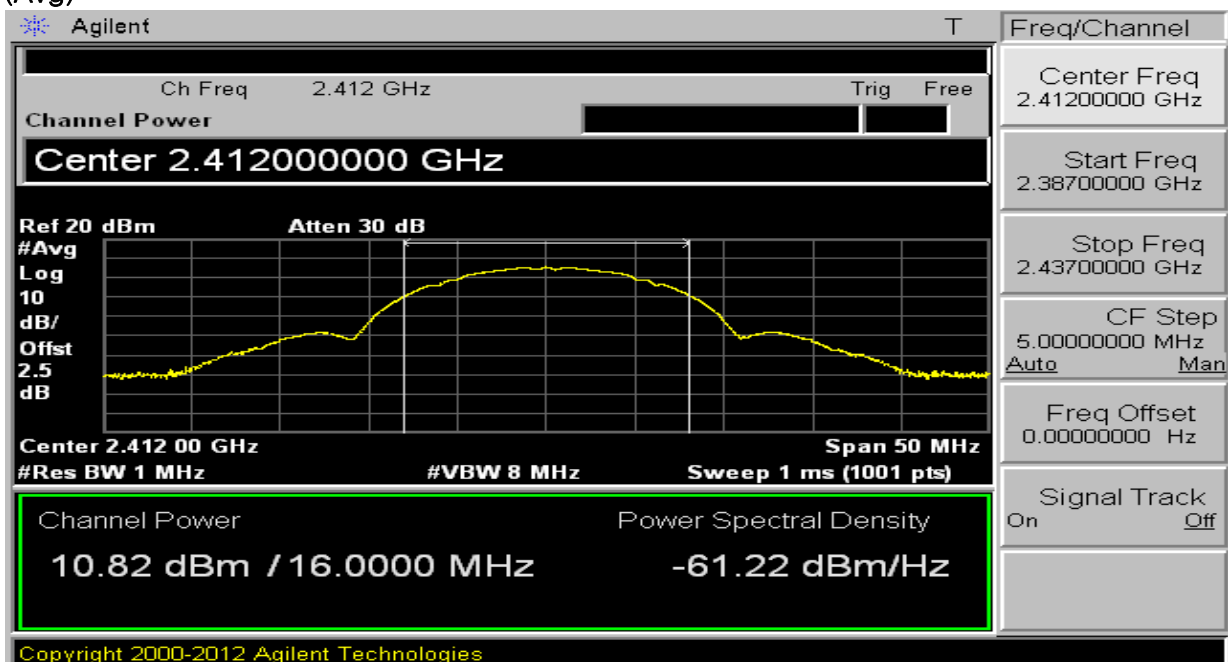


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_6)

(Peak)

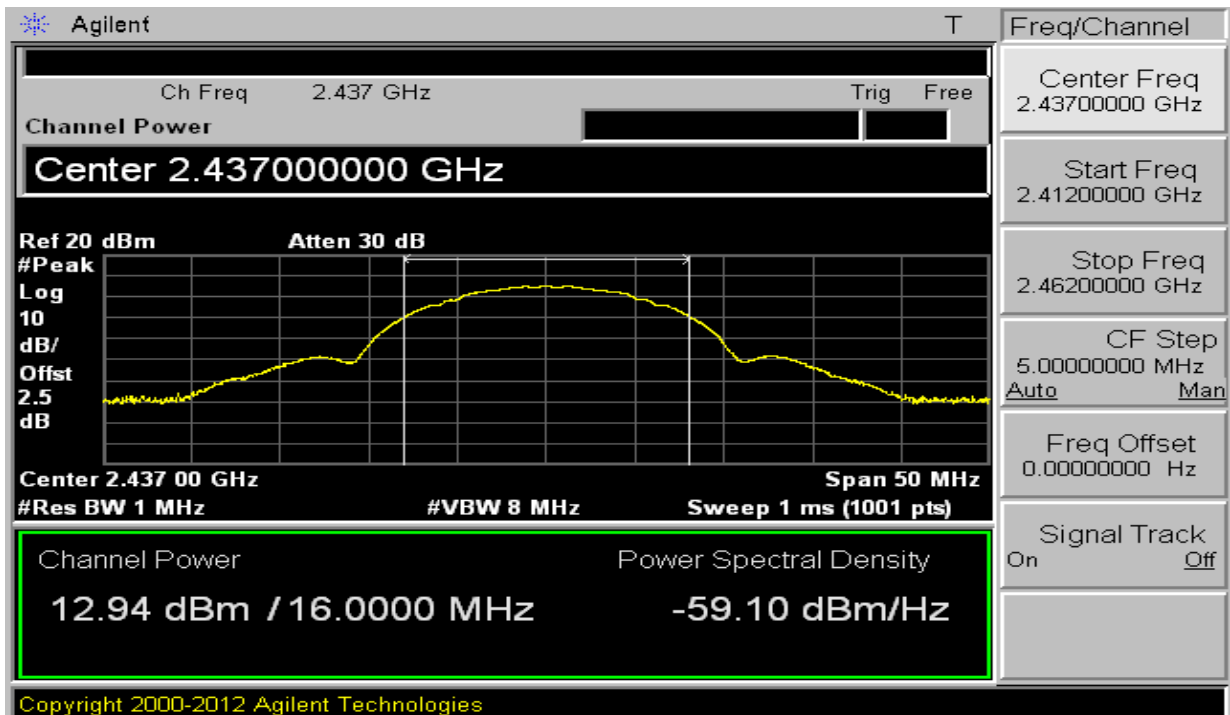

(Avg)

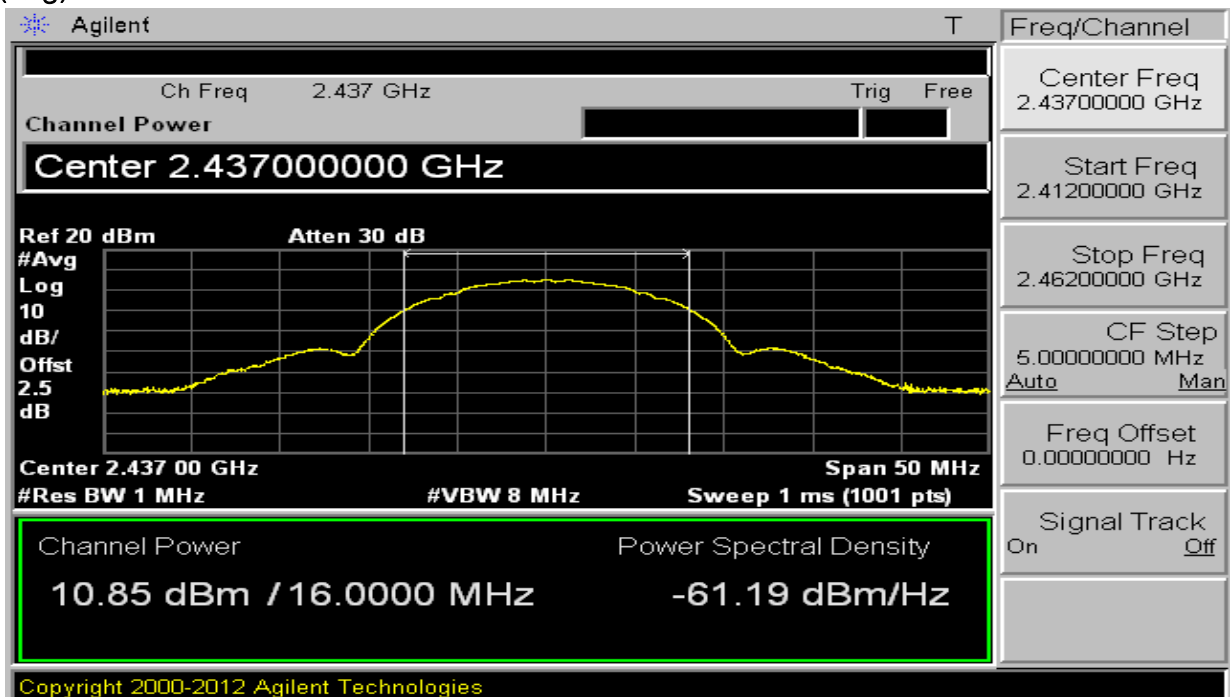


**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

(Peak)

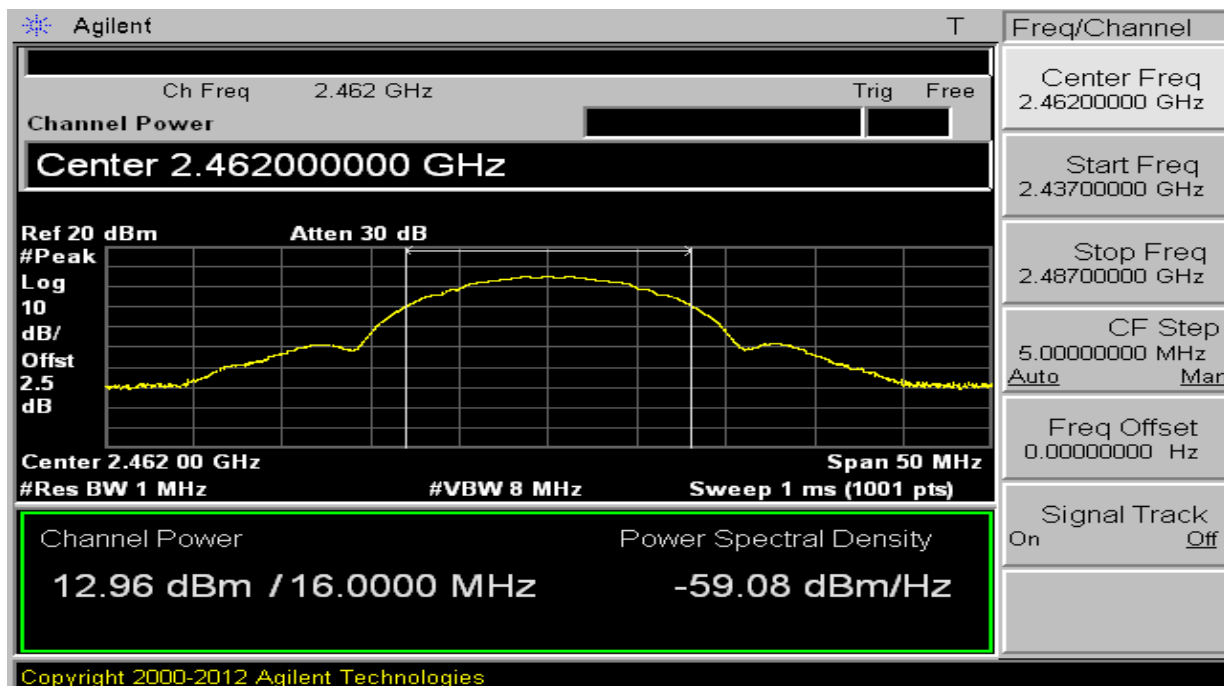

(Avg)

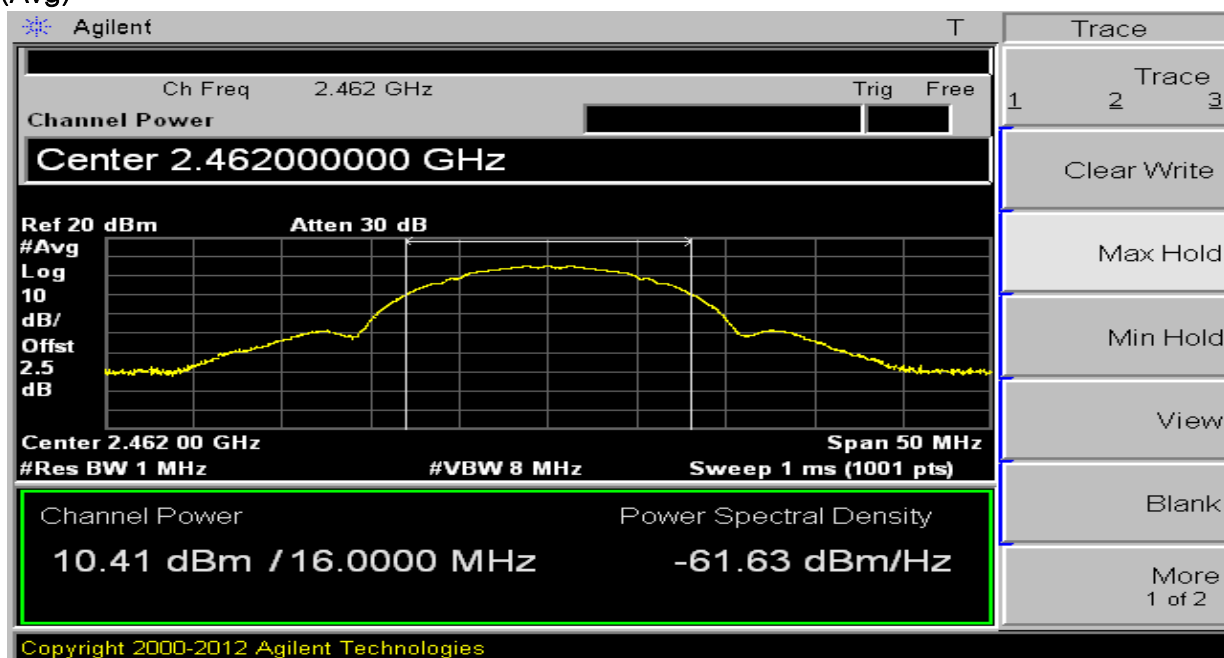



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


7.4 Trace data (Peak, Average) – OFDM

(ch_1)

(Peak)

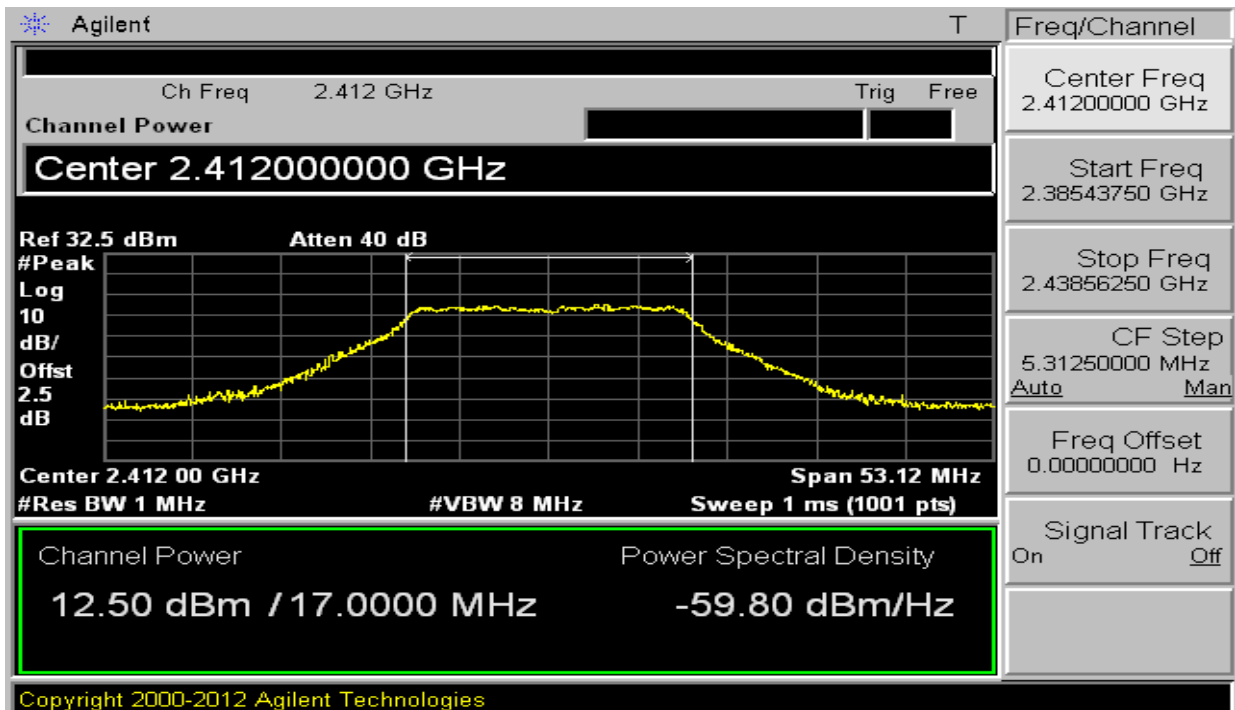

(Avg)

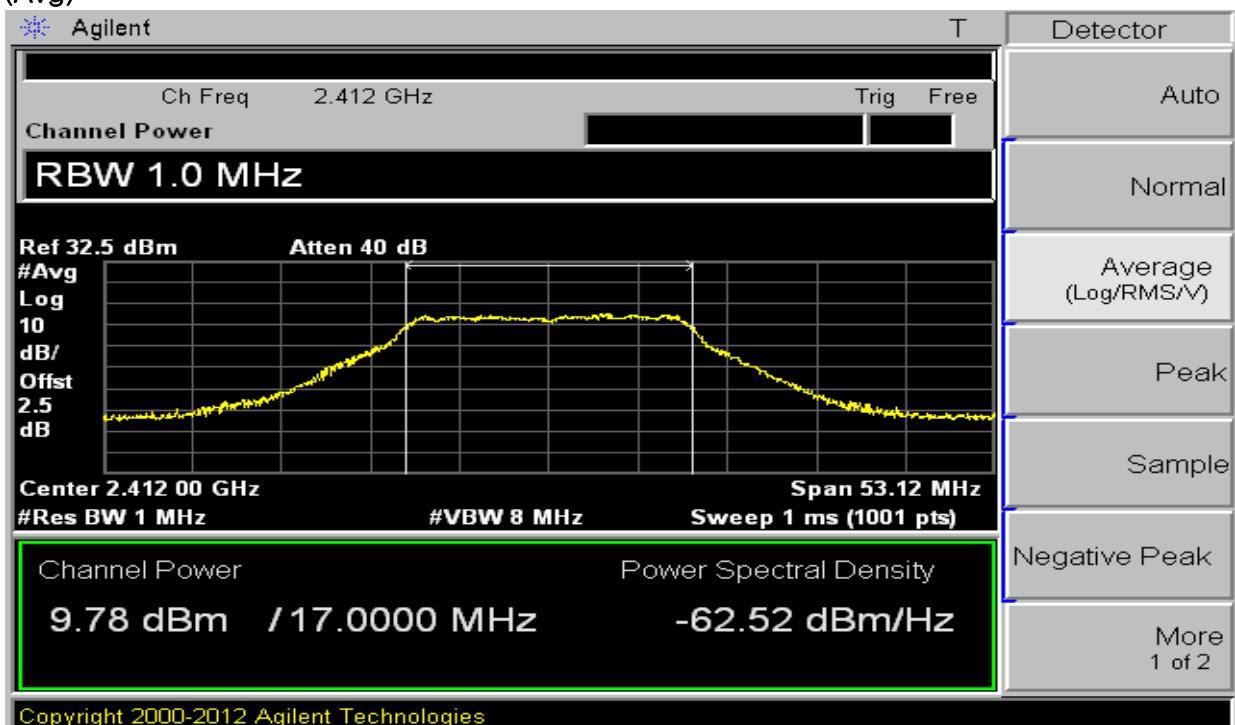


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_6)

(Peak)

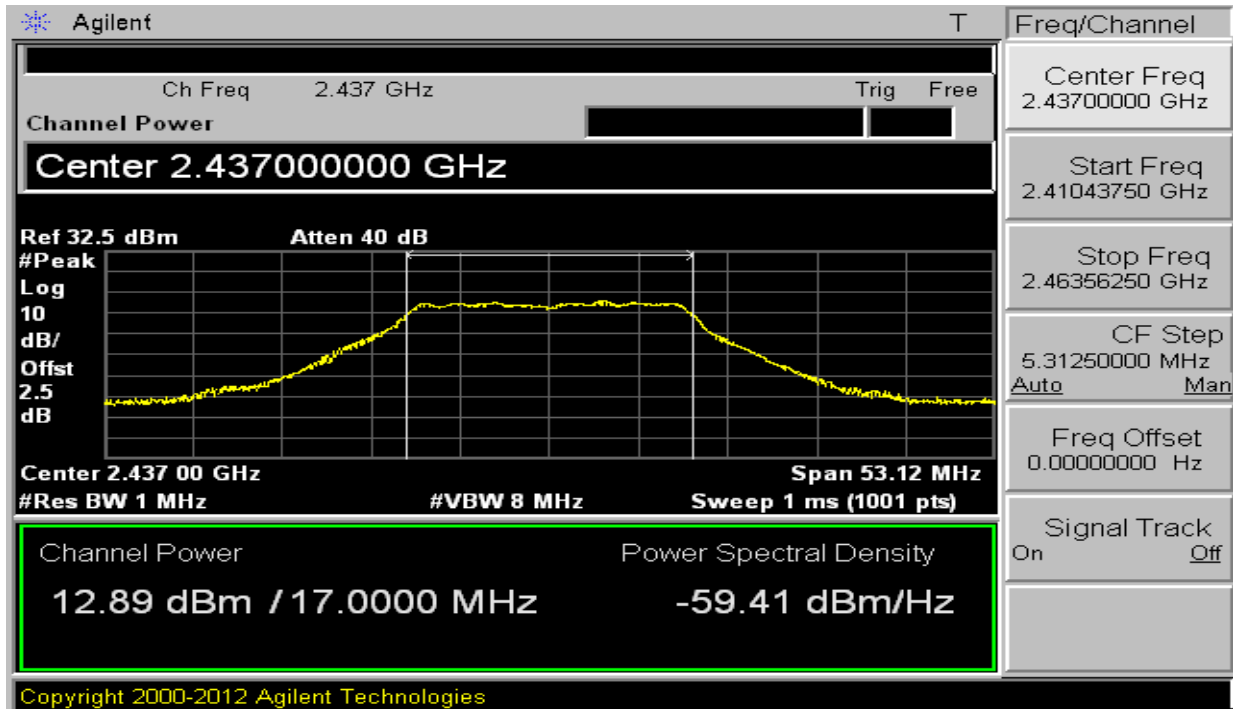

(Avg)

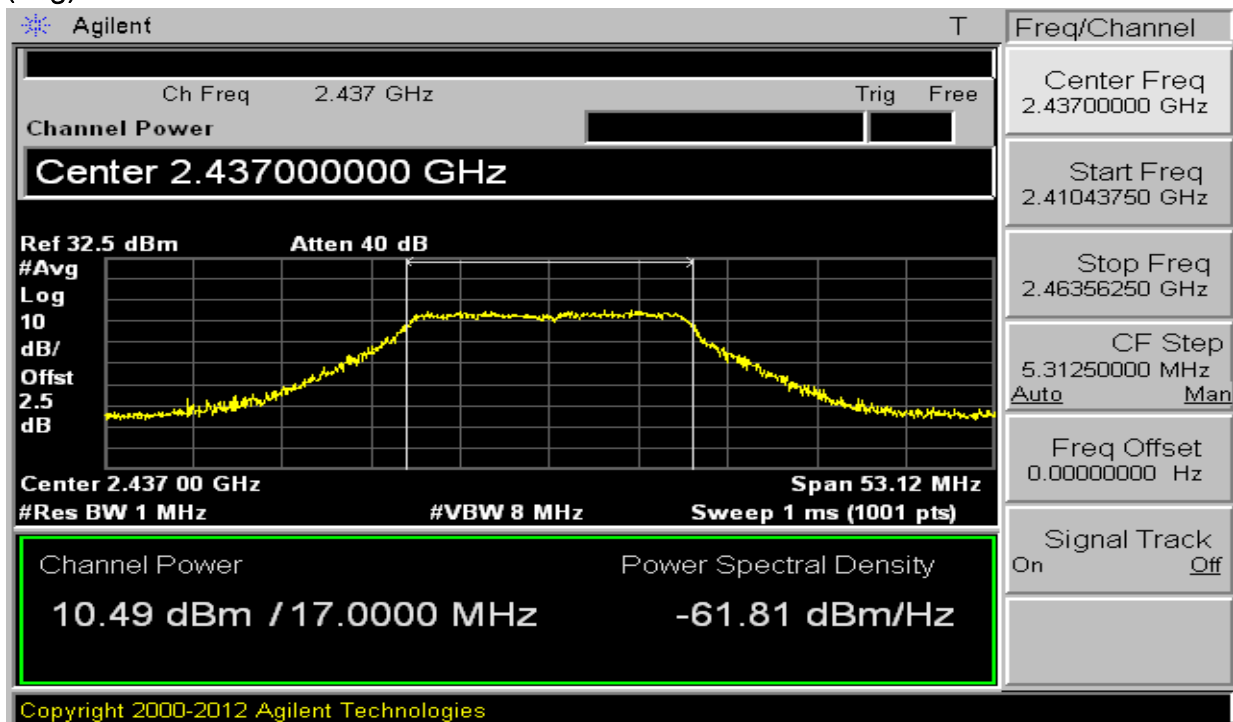


**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

(ch_11)

(Peak)

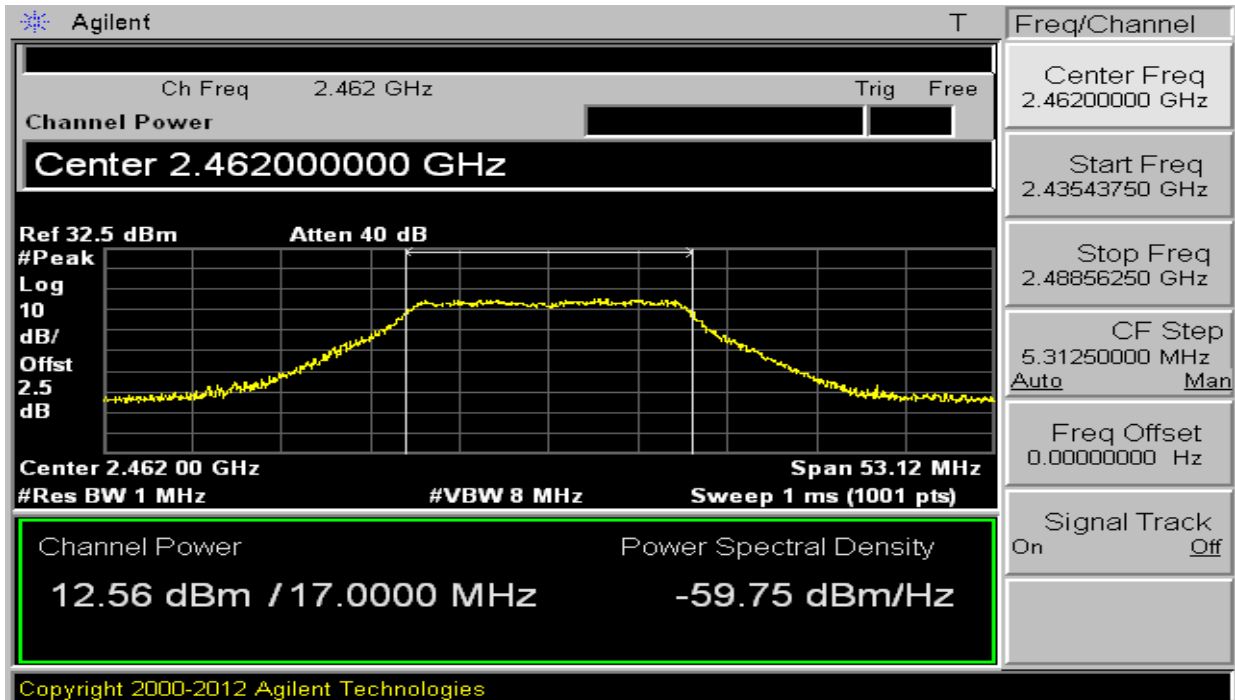

(Avg)

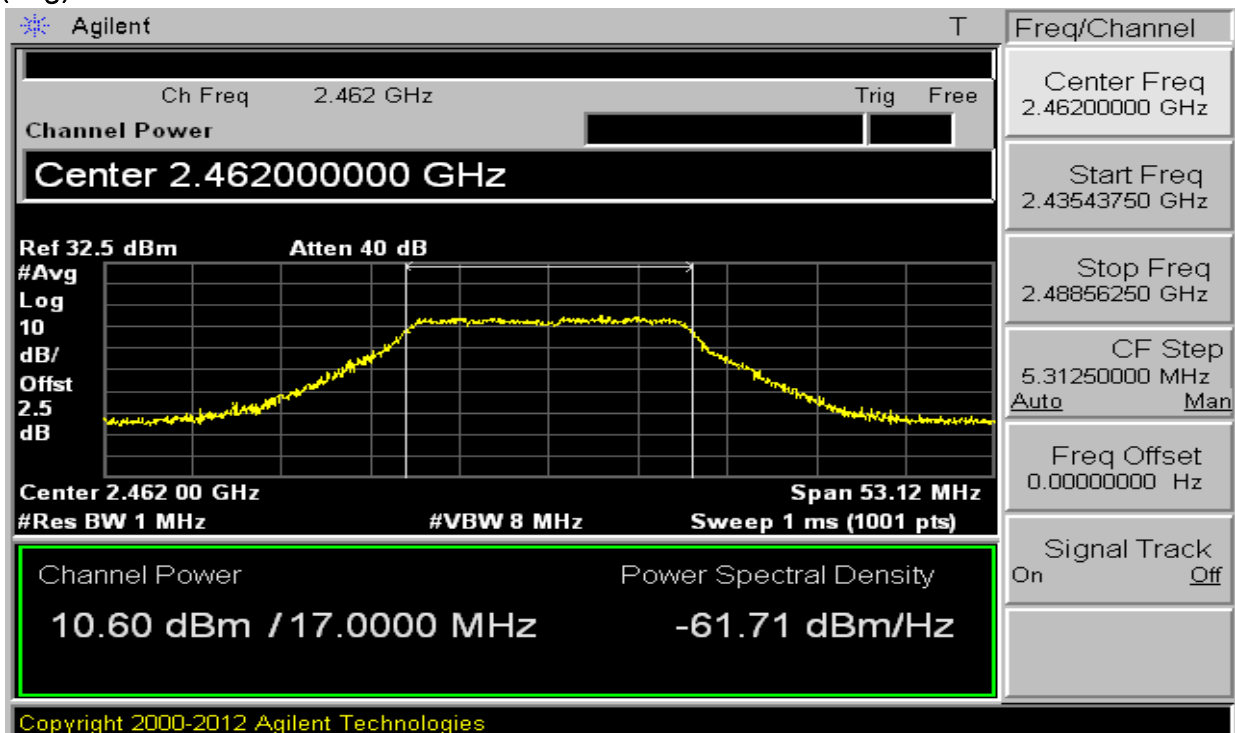

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8. Maximum power spectral density level in the fundamental emission**8.1 Test procedure**

KDB 558074 D01 DTS Meas Guidance V03r02 10.2 Method PKPSD (peak PSD)

8.2 Test instruments and measurement setup

The spectrum analyzer is set to as following.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limits FCC § 15.247

The peak power density Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E440A	US42041291	15-Jan-16
RF Cable	Length: 10 cm	–	
–Spectrum Analyzer <=> EUT	Loss: 2.5 dB	–	

8.3 Measurement results – Adapter

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	22.0 °C, 45.0 % R.H.
INPUT POWER	6.0 Vd.c.		

MODE – CCK

CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
1	2 412	–19.65	8.0	27.65
6	2 437	–19.34	8.0	27.34
11	2 462	–19.21	8.0	27.21

MODE – OFDM

CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
1	2 412	–15.03	8.0	23.03
6	2 437	–14.59	8.0	22.59
11	2 462	–14.99	8.0	22.99

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.3 Measurement results – POE

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.
INPUT POWER	48 Vd.c.		

MODE – CCK

CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
1	2 412	-19.05	8.0	27.05
6	2 437	-18.70	8.0	26.70
11	2 462	-18.80	8.0	26.80

MODE – OFDM

CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
1	2 412	-16.84	8.0	24.84
6	2 437	-17.69	8.0	25.69
11	2 462	-16.93	8.0	24.93




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – CCK (Adapter) (ch_1)

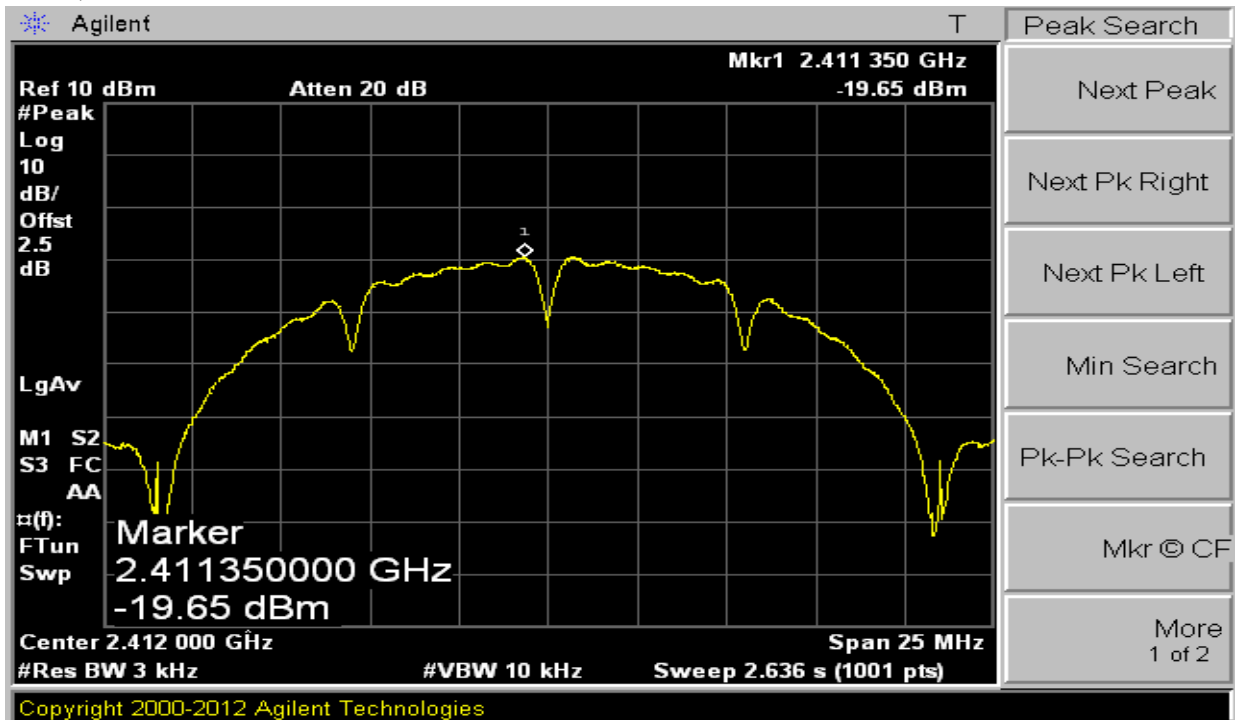

(ch_6)

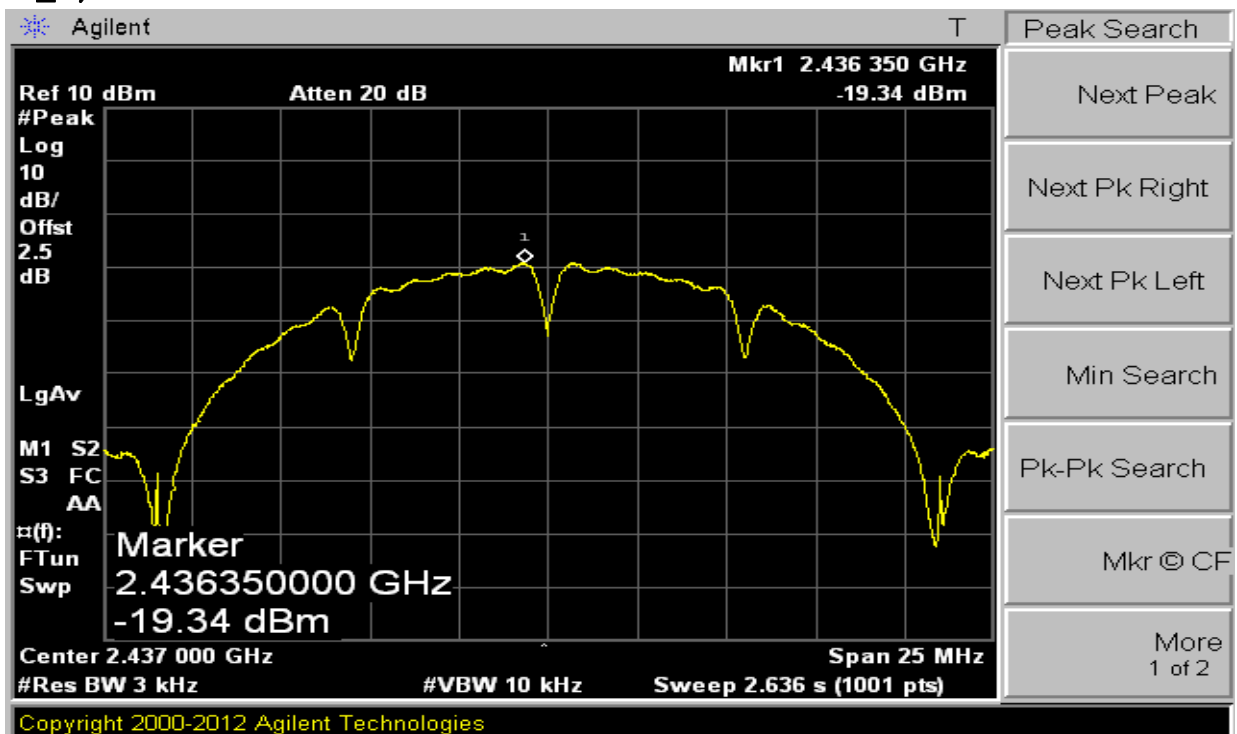




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – CCK (ch_11)

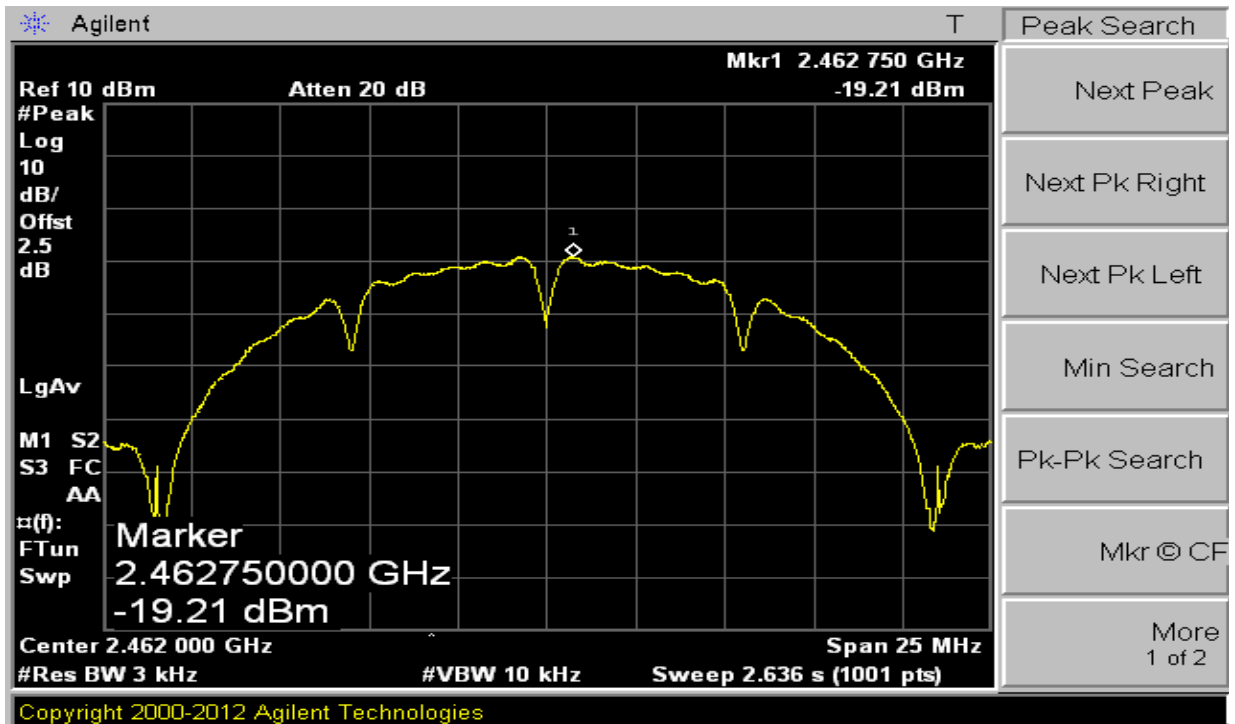




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – OFDM

(ch_1)

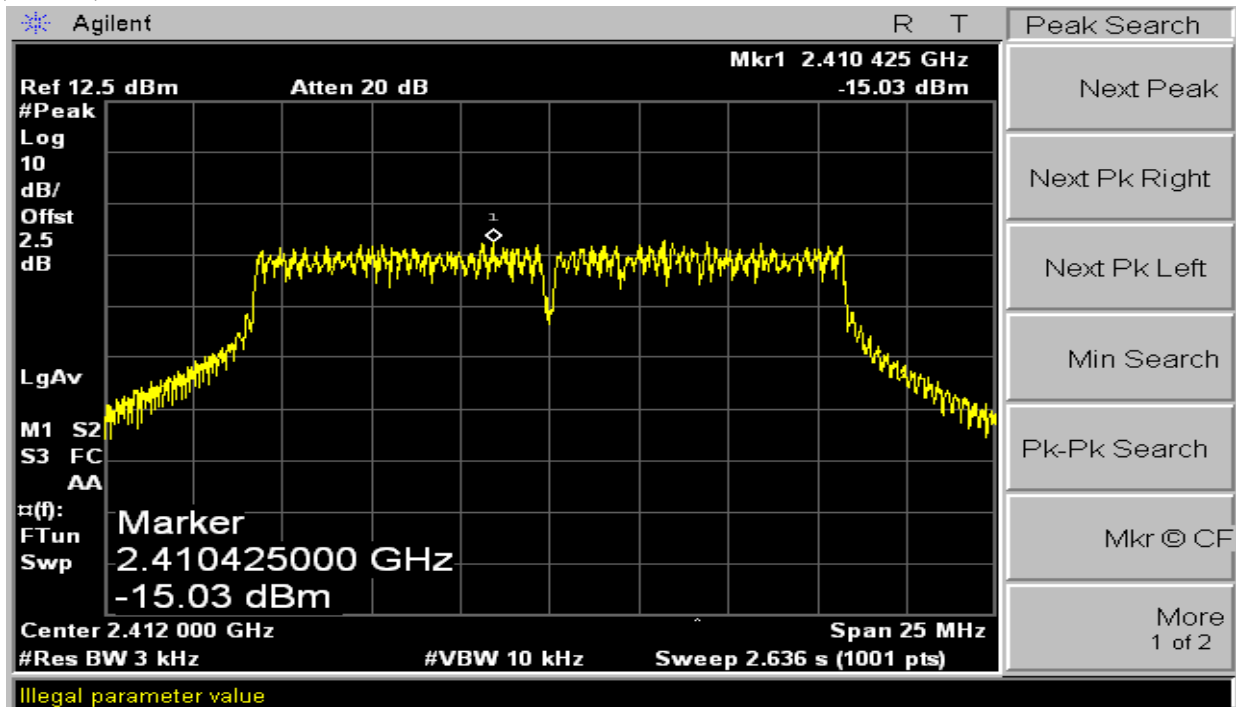

(ch_6)

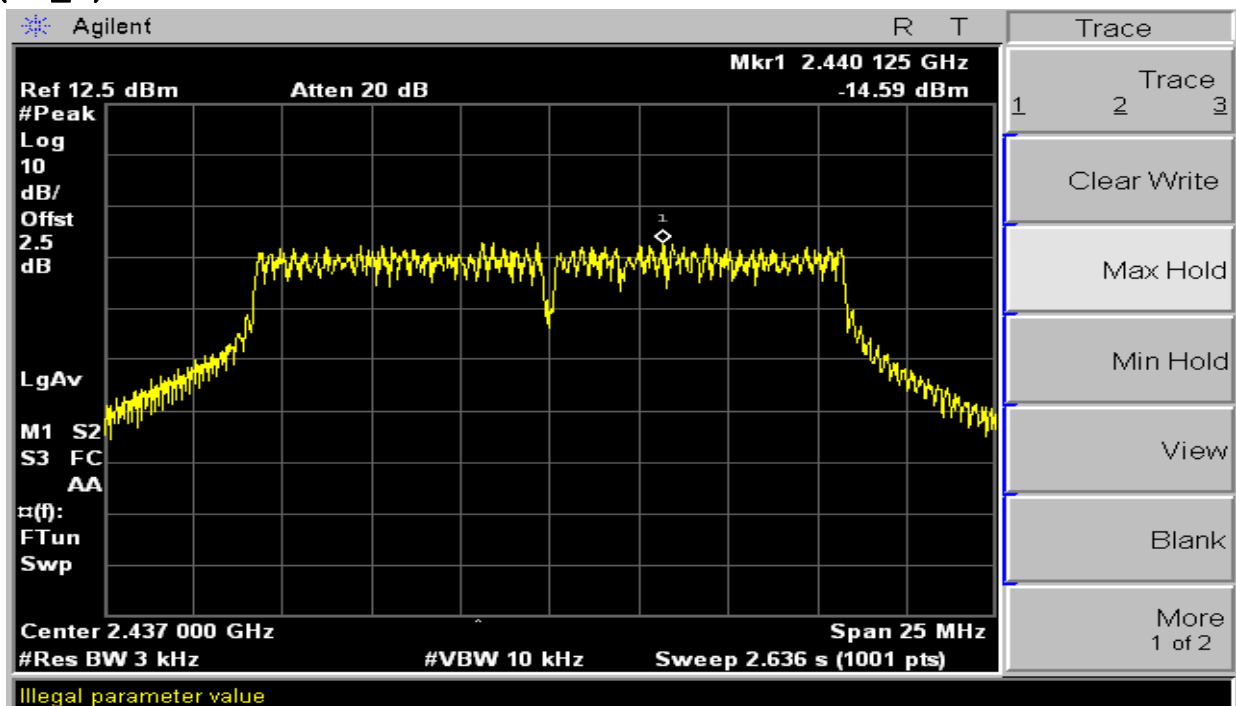




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – OFDM (ch_11)

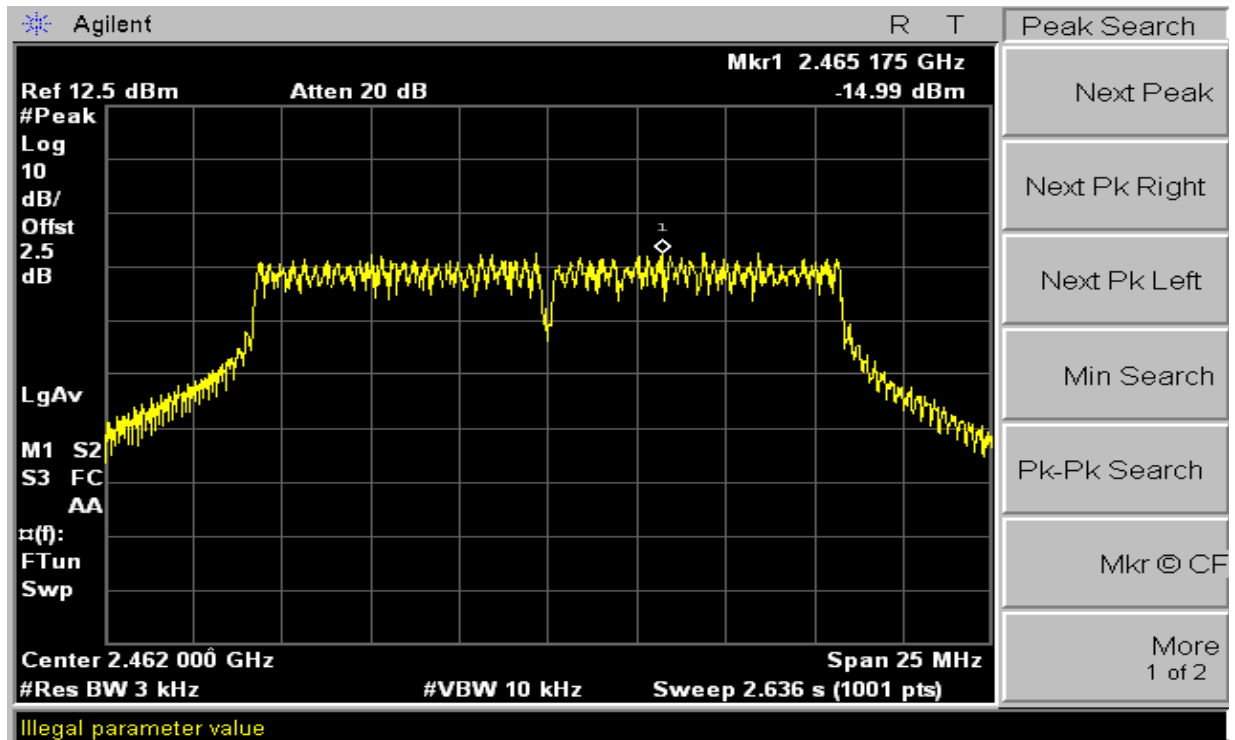




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – CCK (POE)

(ch_1)

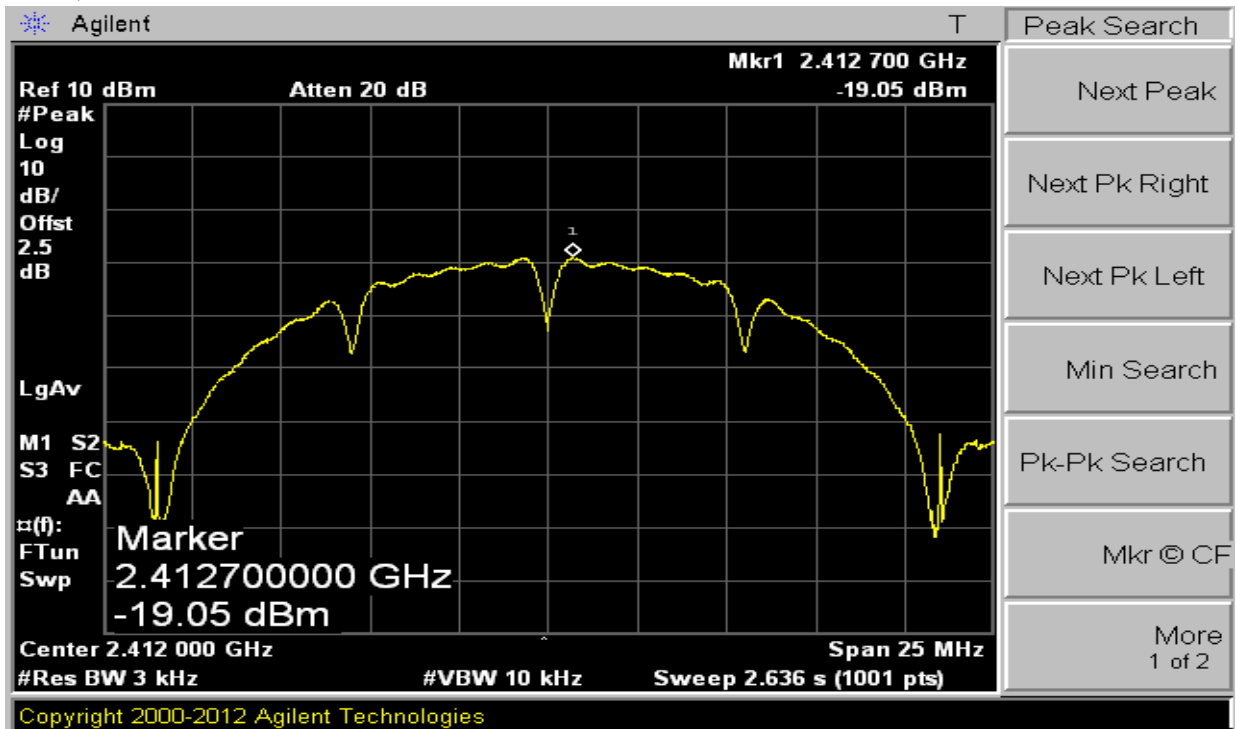

(ch_6)

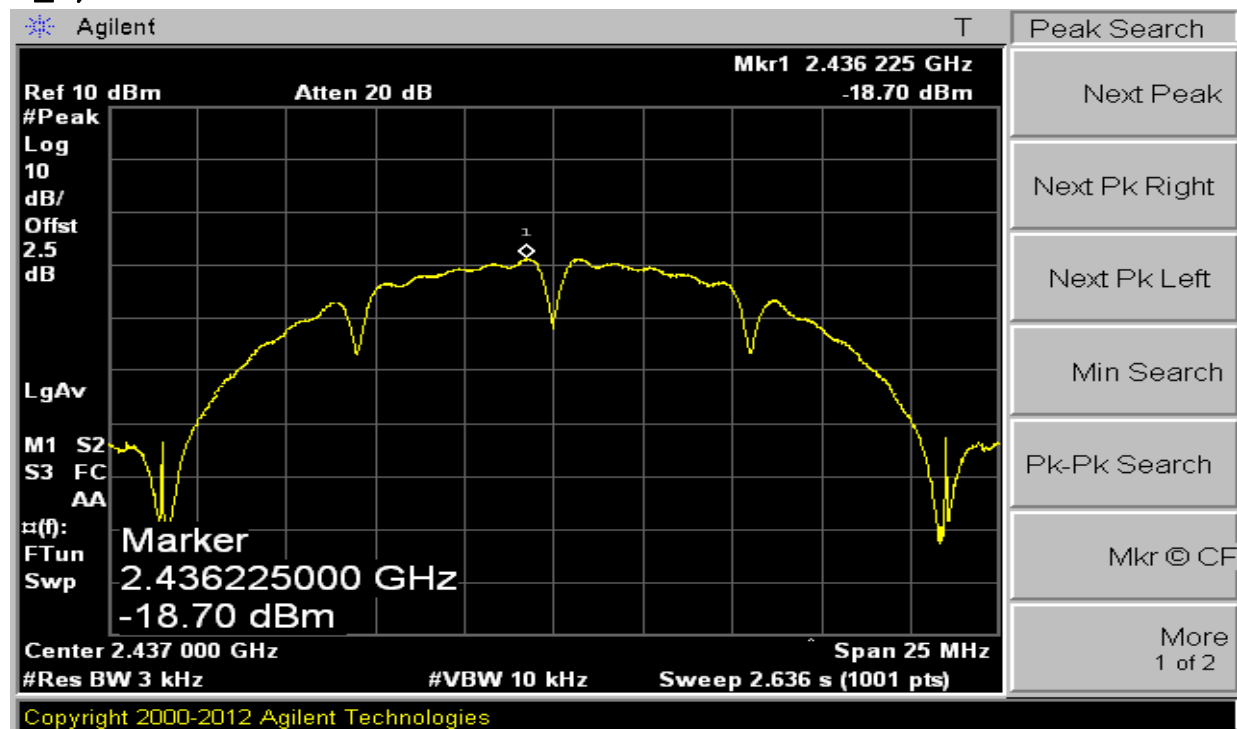




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – CCK (ch_11)

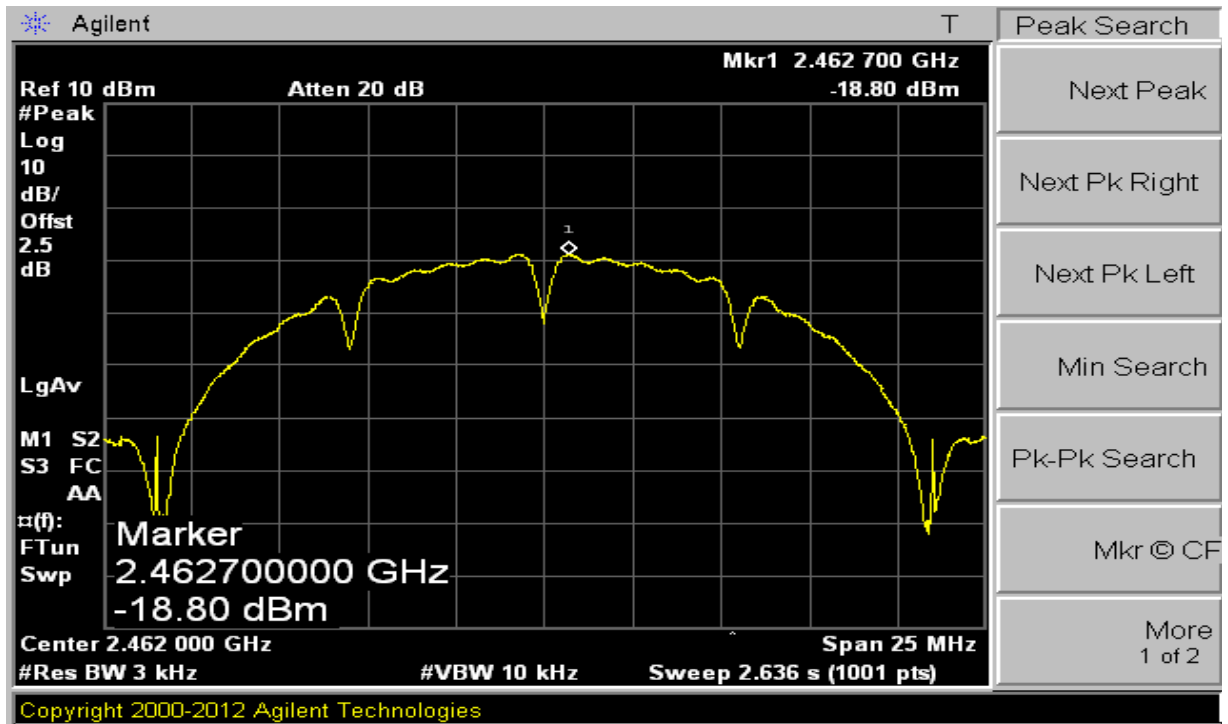




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – OFDM (ch_1)

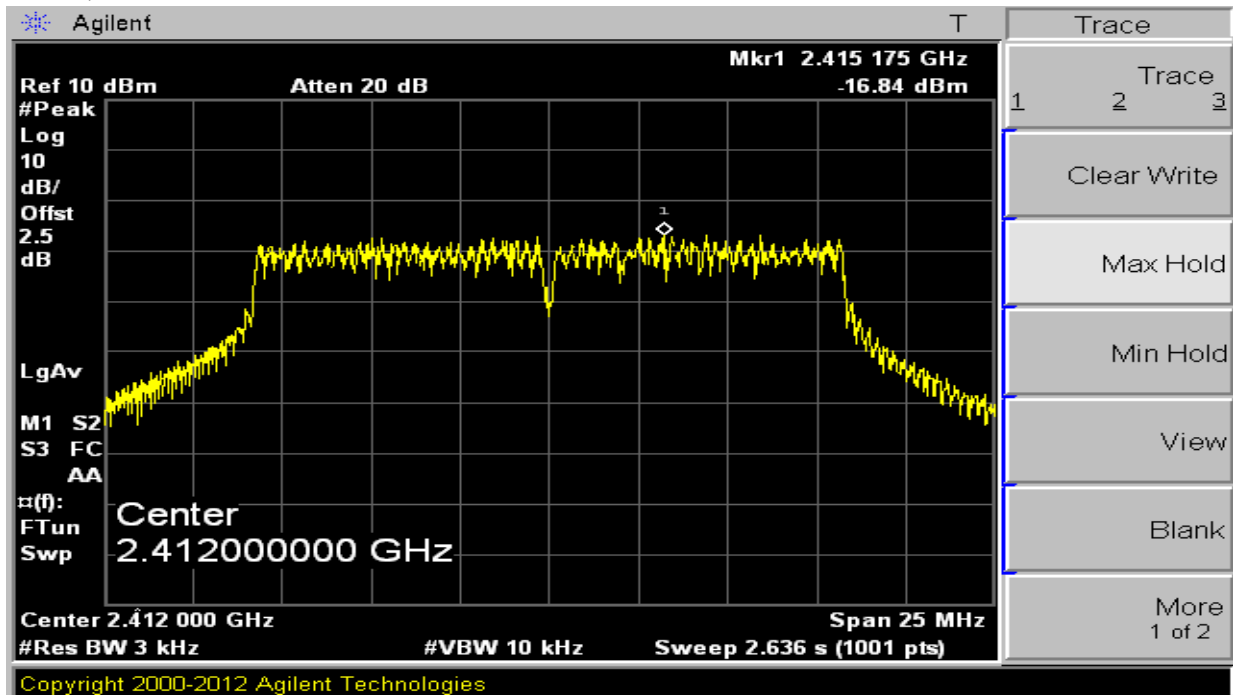

(ch_6)

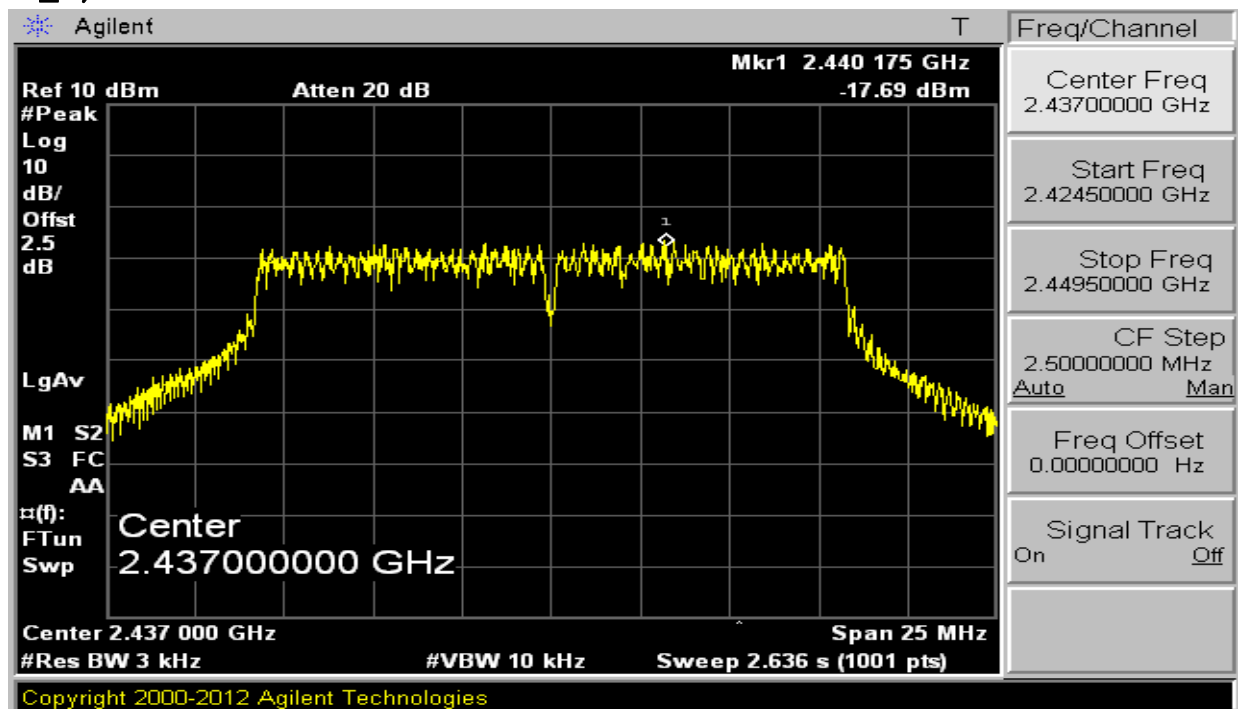




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

8.4 Trace data – OFDM (ch_11)

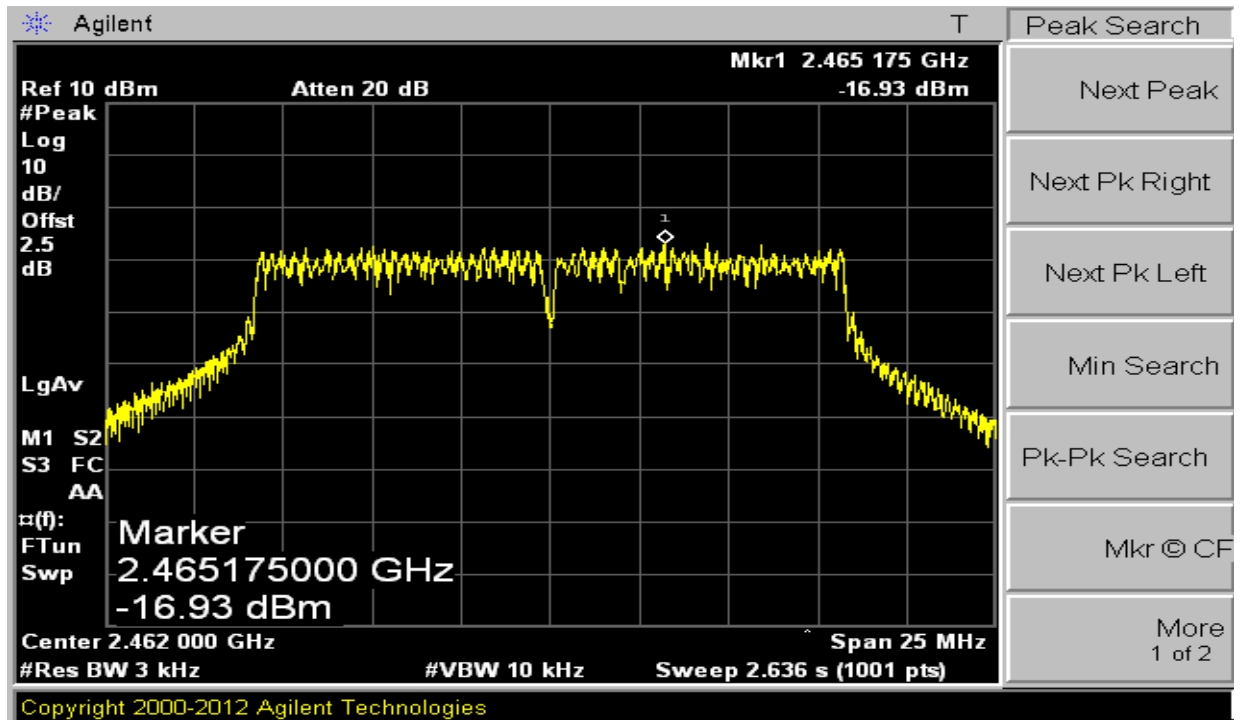

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9. Emissions in non-restricted frequency bands

9.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r02 11.0 Emissions in non-restricted frequency

9.2 Test instruments and measurement setup

The spectrum analyzer is set to as following.

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Limits FCC § 15.247

Band Edge&Out of Emission Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	15-Jan-16
Spectrum Analyzer	FSV40	100939	19-Jan-16
RF Cable	Length: 10 cm		-
-Spectrum Analyzer <=> EUT	Loss: 2.5 dB		-

9.3 Measurement results of band-edge & out of emission – Adapter

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.
INPUT POWER	6.0 Vd.c.		

MODE –CCK

CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
1	2 412	20dBc	PASS
11	2 462	20dBc	PASS

MODE – OFDM

CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
1	2 412	20dBc	PASS
11	2 462	20dBc	PASS

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.3 Measurement results of band-edge & out of emission – POE

EUT	Biostation A2	MODEL	BSA2-OMPW
MODE	CCK, OFDM	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.
INPUT POWER	48.0 Vd.c.		

MODE –CCK

CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
1	2 412	20dBc	PASS
11	2 462	20dBc	PASS

MODE – OFDM


CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
1	2 412	20dBc	PASS
11	2 462	20dBc	PASS

**Estech Co., Ltd.**


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of band-edge & Out of Emission – CCK (Adapter) (ch_1)

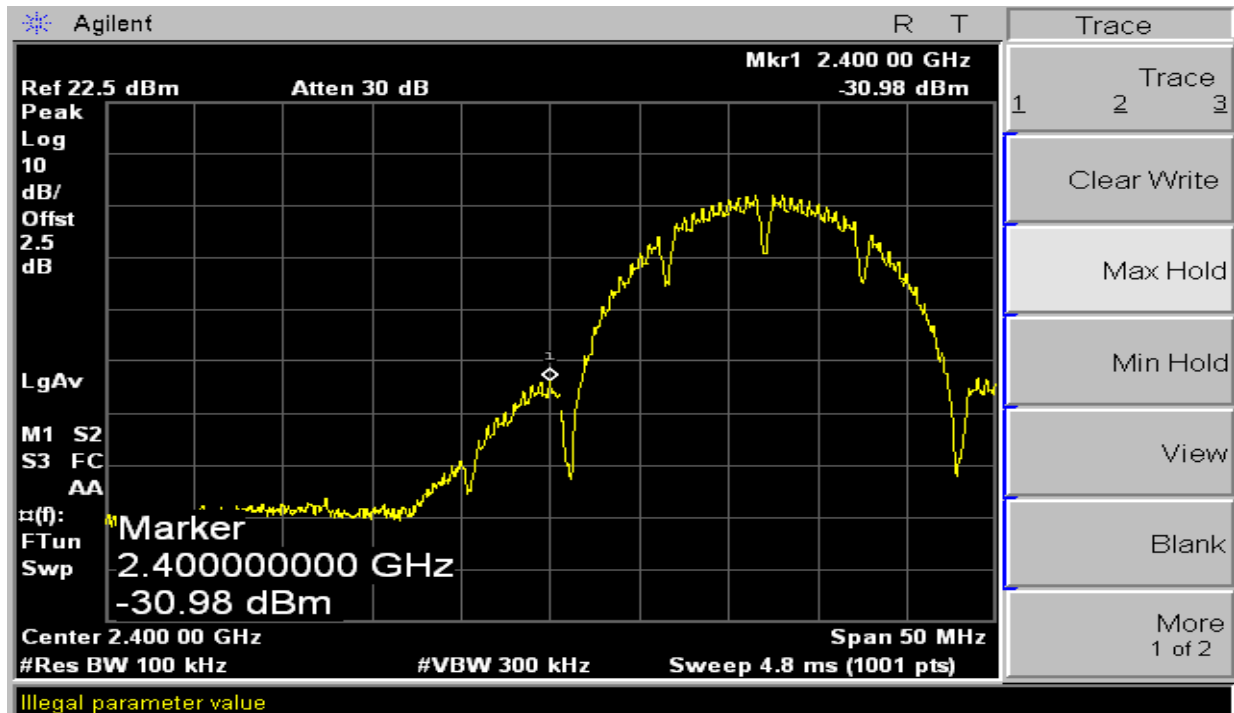

(ch_11)

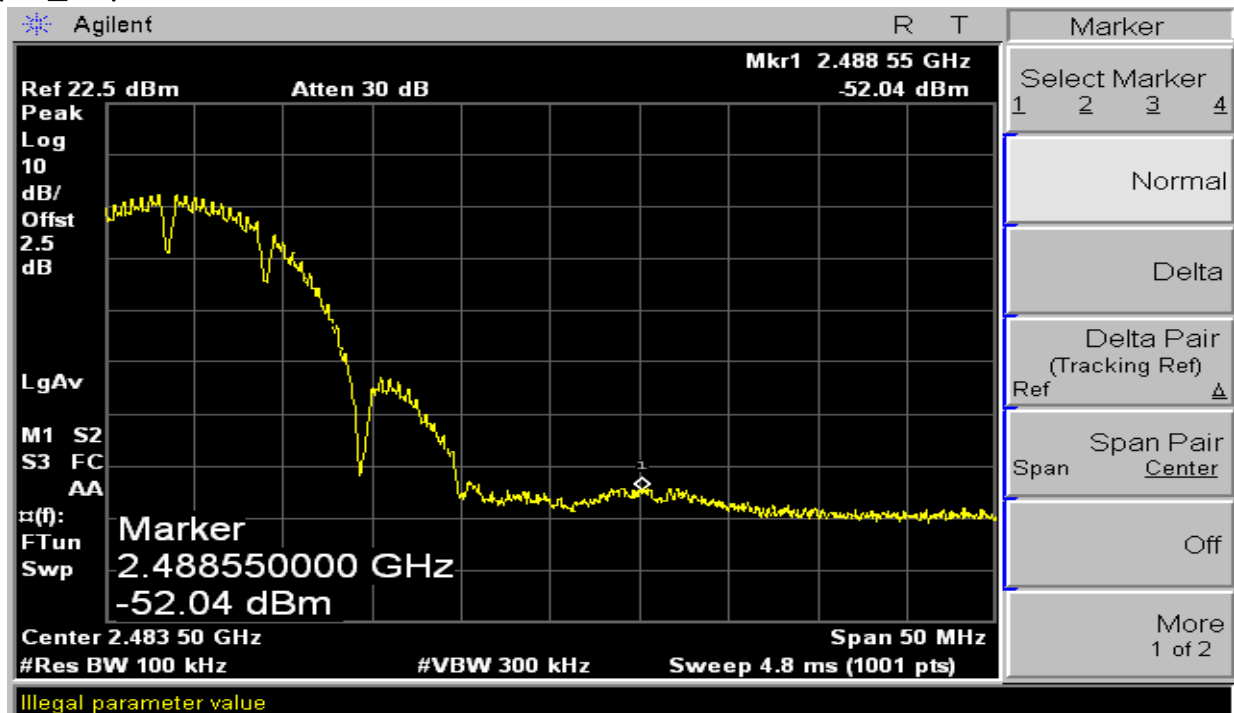




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of band-edge & Out of Emission – OFDM (adapter) (ch_1)

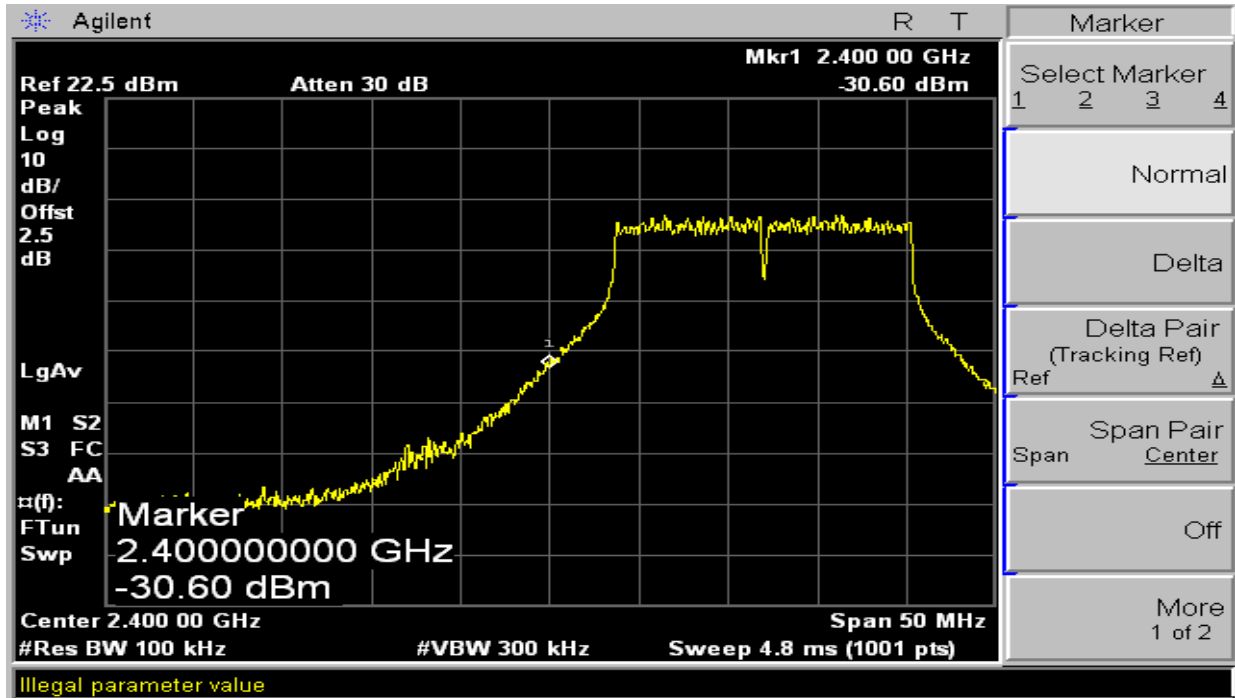

(ch_11)

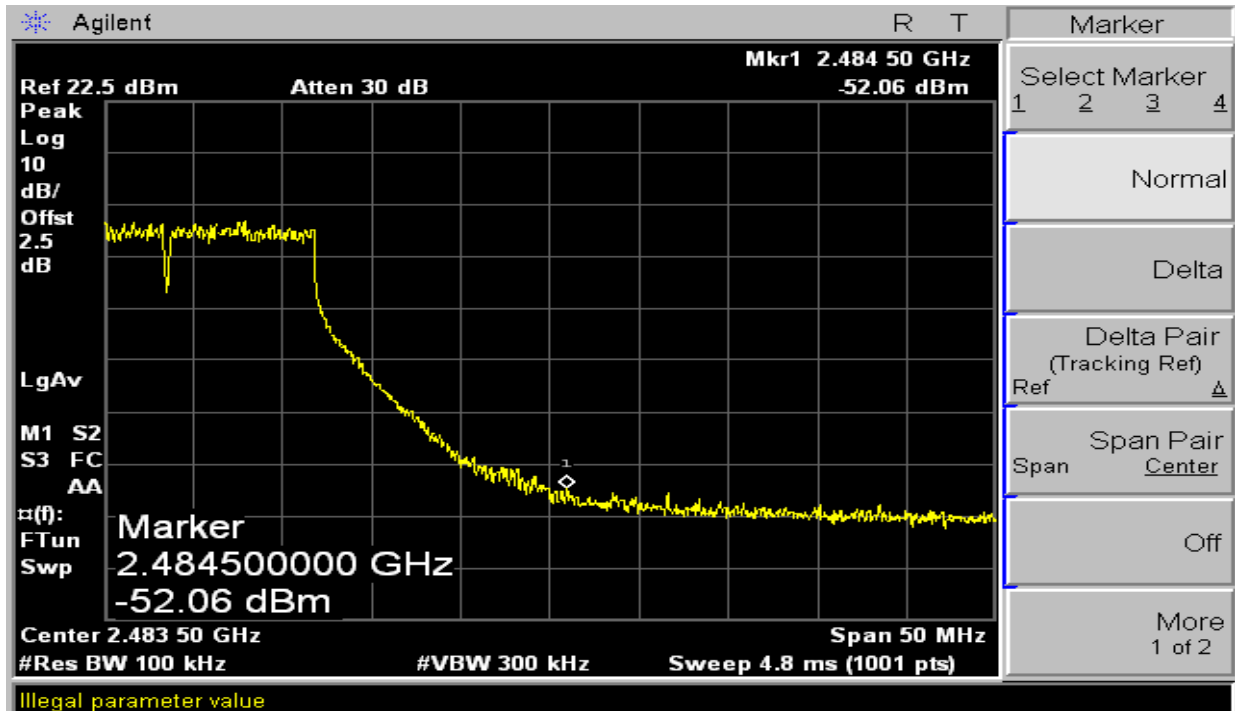




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of band-edge & Out of Emission – CCK (POE) (ch_1)

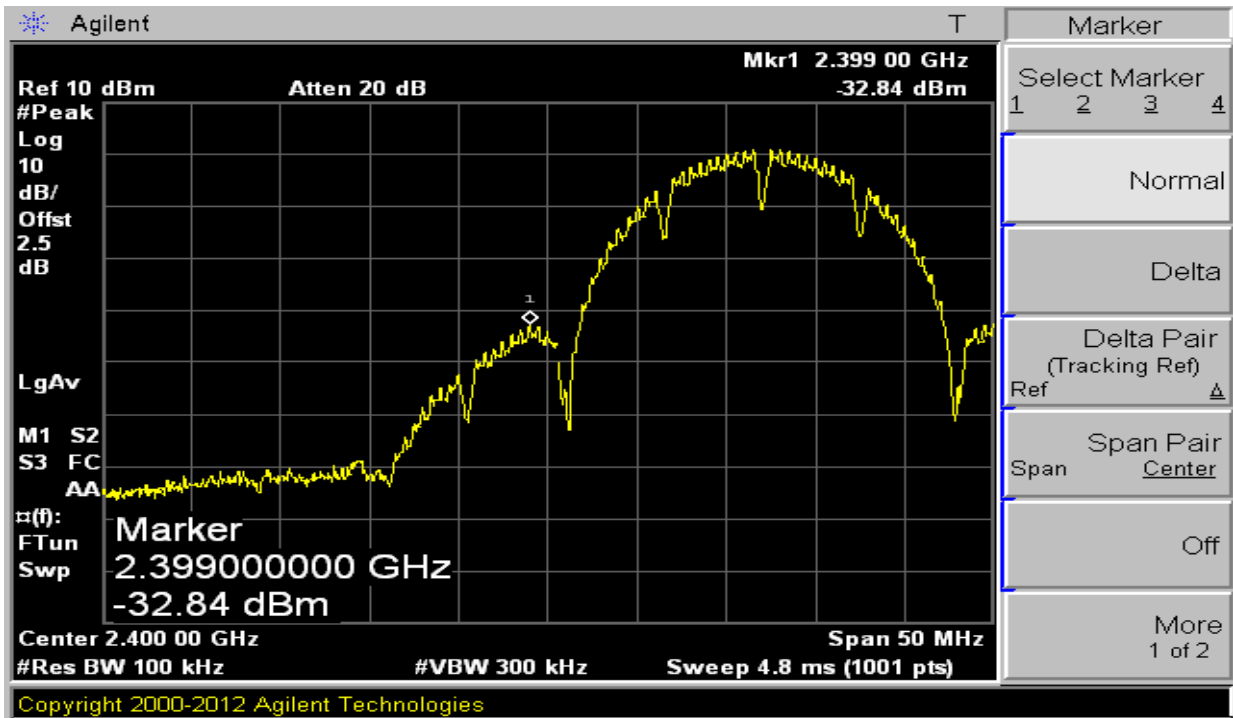

(ch_11)

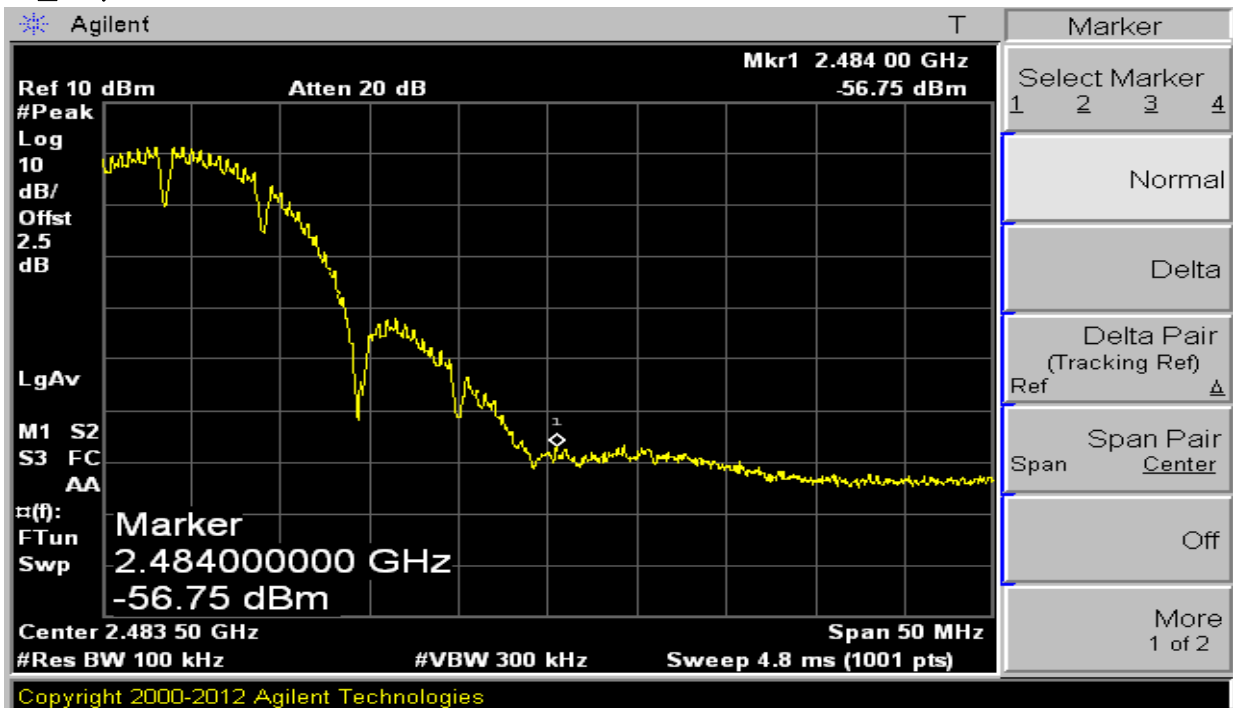




Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of band-edge & Out of Emission – OFDM (POE) (ch_1)

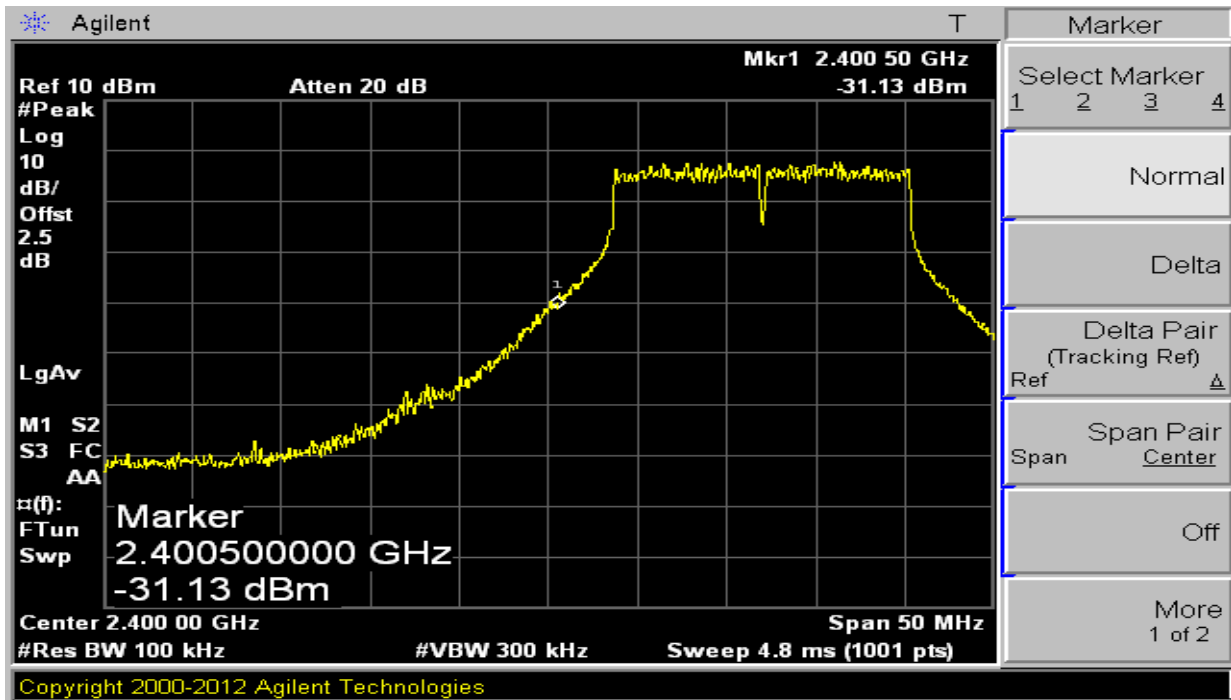

(ch_11)

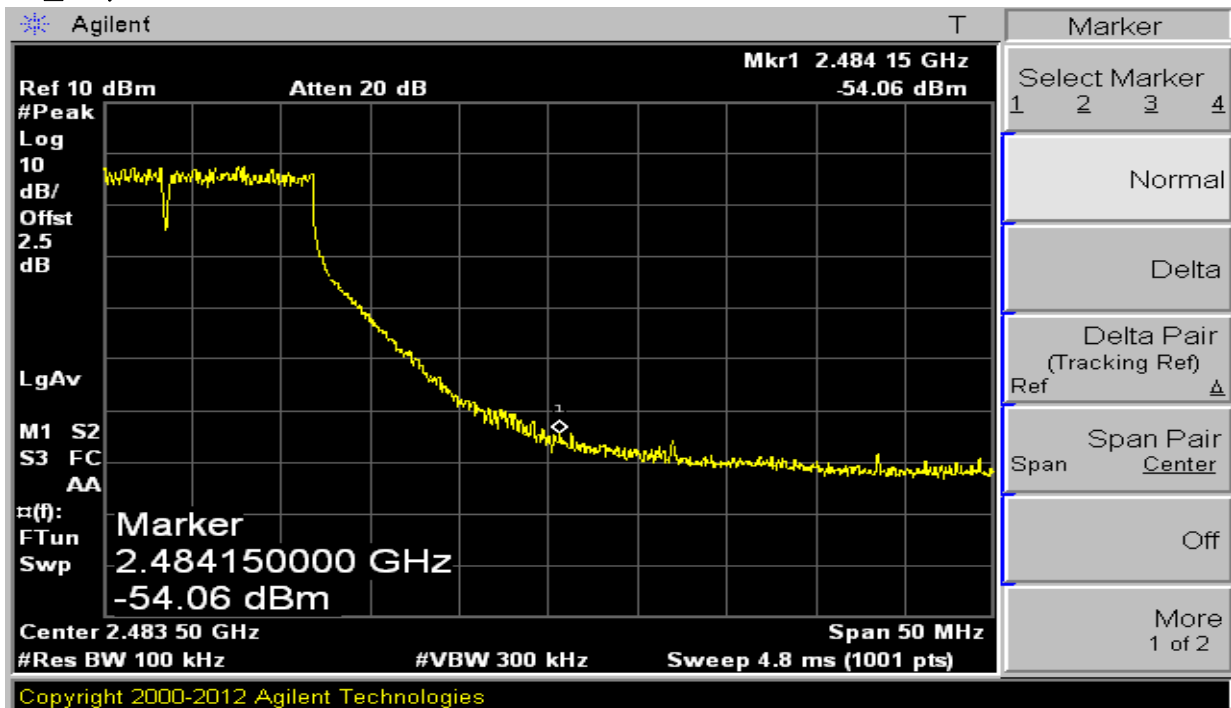




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


9.4 Trace data of Out of Emission – CCK (Adapter)

(ch_1)

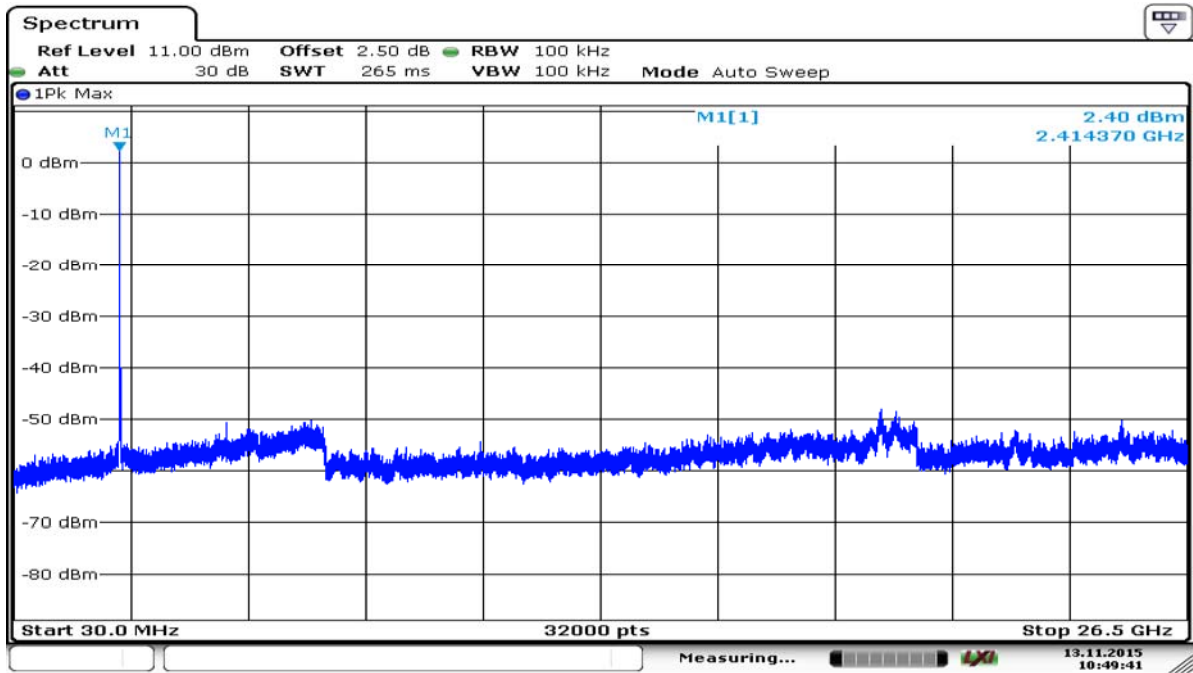

Date: 13.NOV.2015 10:49:41

(ch_6)

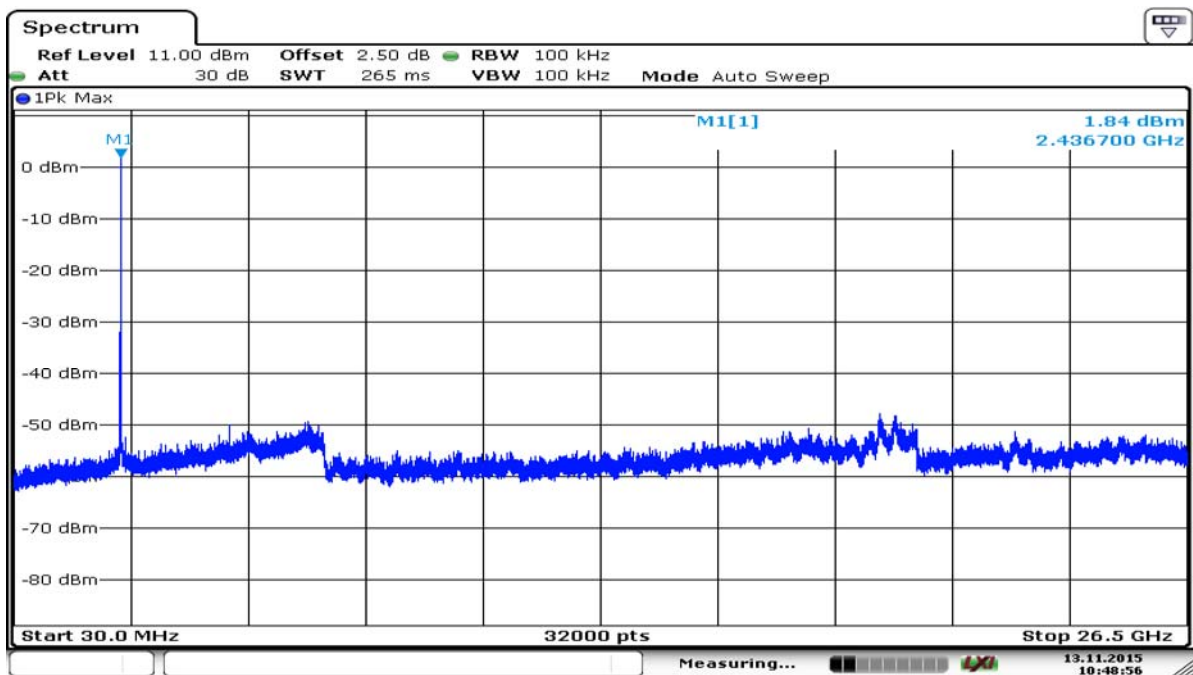

Date: 13.NOV.2015 10:48:57




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of Out of Emission – CCK

(ch_11)

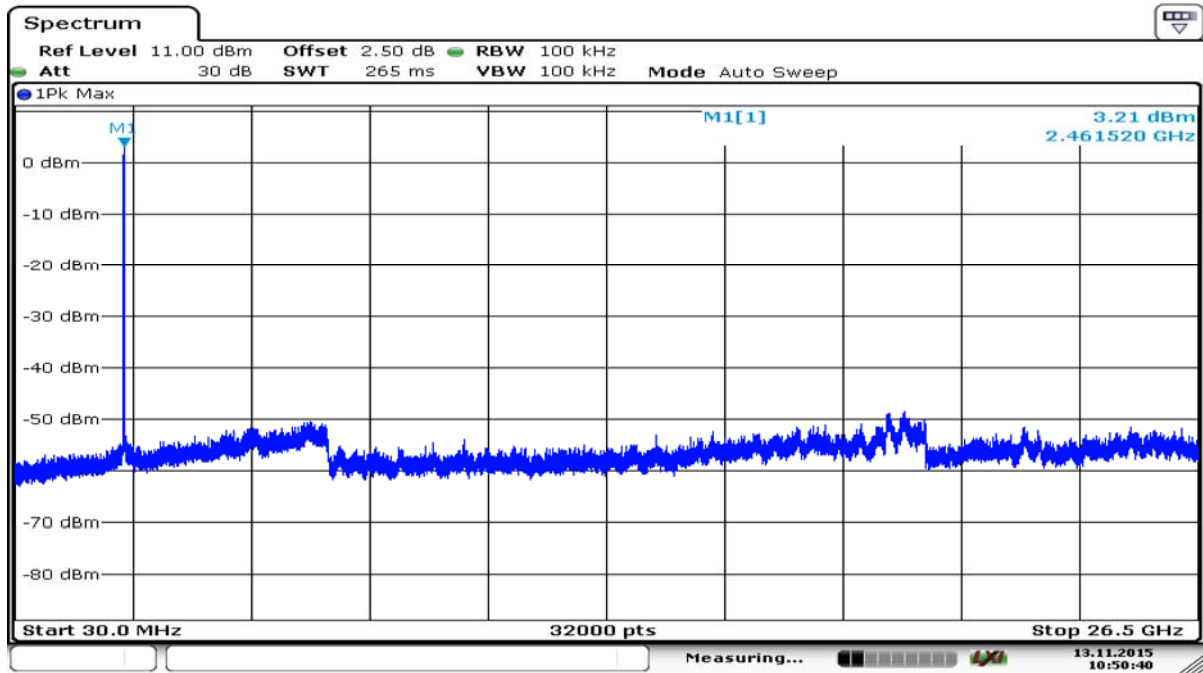

Date: 13.NOV.2015 10:50:40




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


9.4 Trace data of Out of Emission – OFDM

(ch_1)

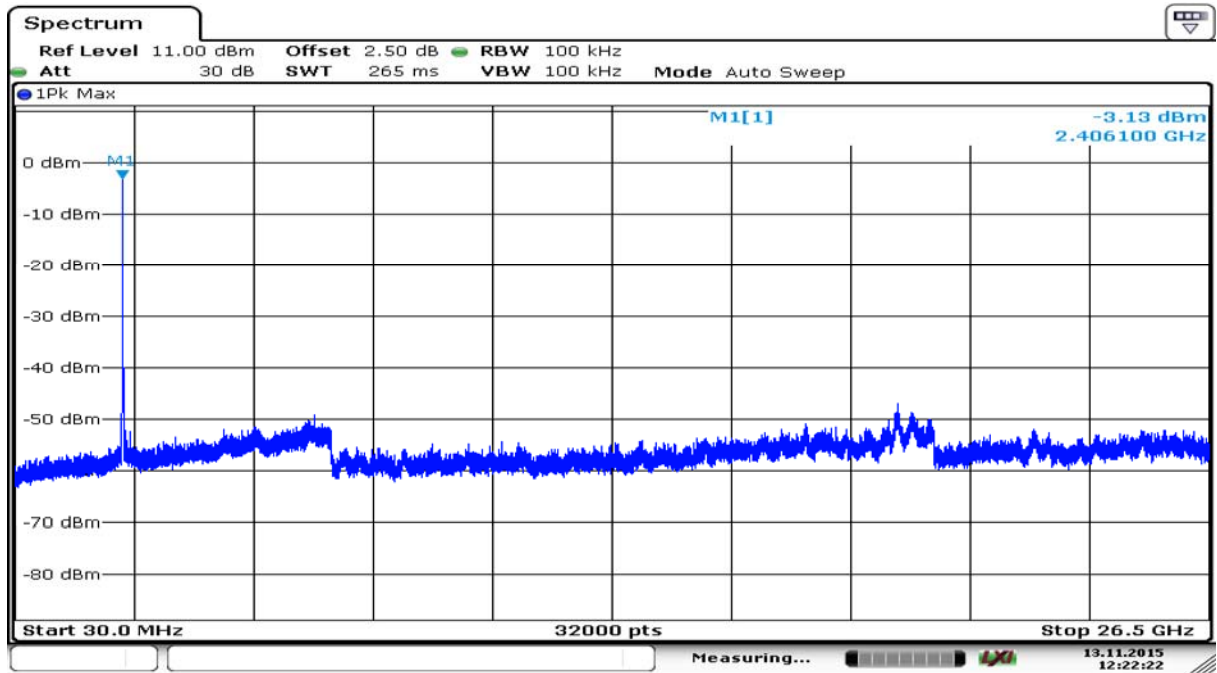

Date: 13.NOV.2015 12:22:22

(ch_6)

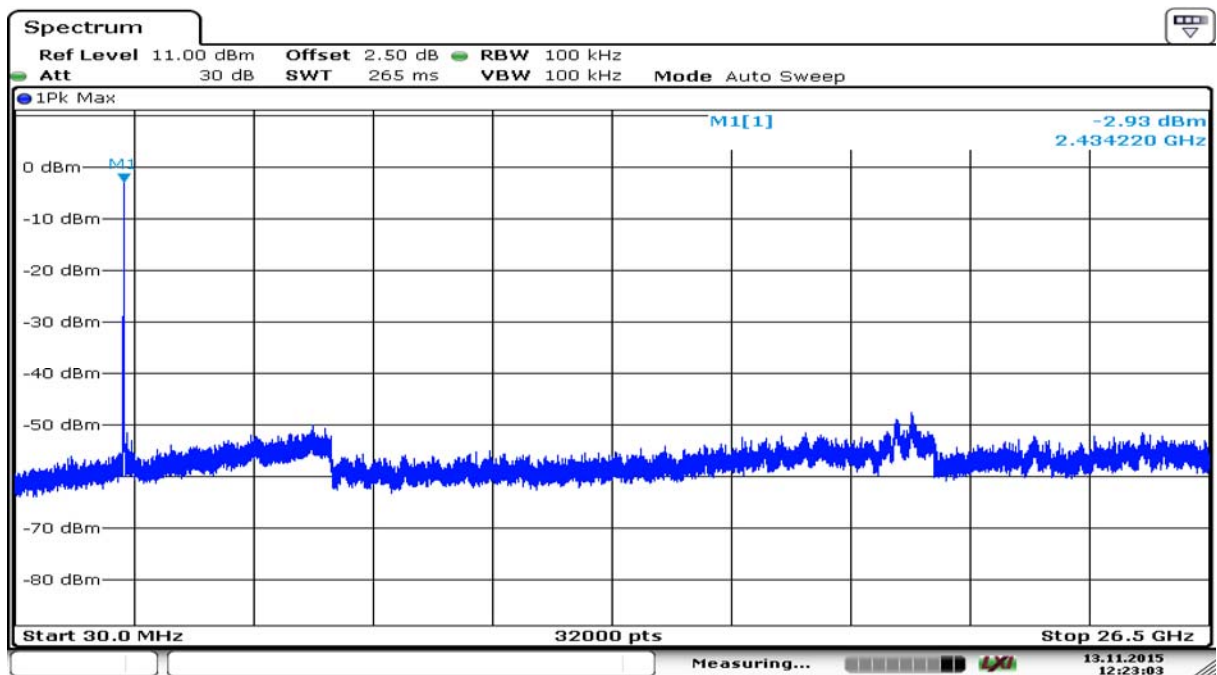

Date: 13.NOV.2015 12:23:03




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of Out of Emission – OFDM

(ch_11)

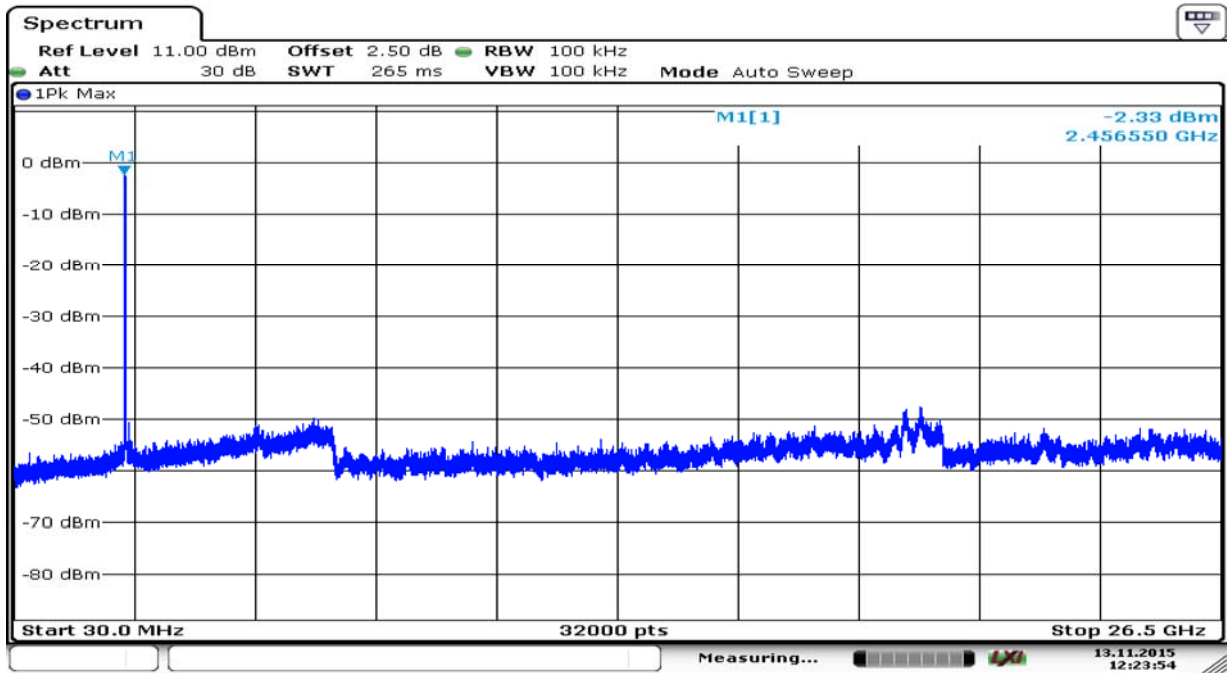

Date: 13.NOV.2015 12:23:55




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


9.4 Trace data of Out of Emission – CCK (POE)

(ch_1)

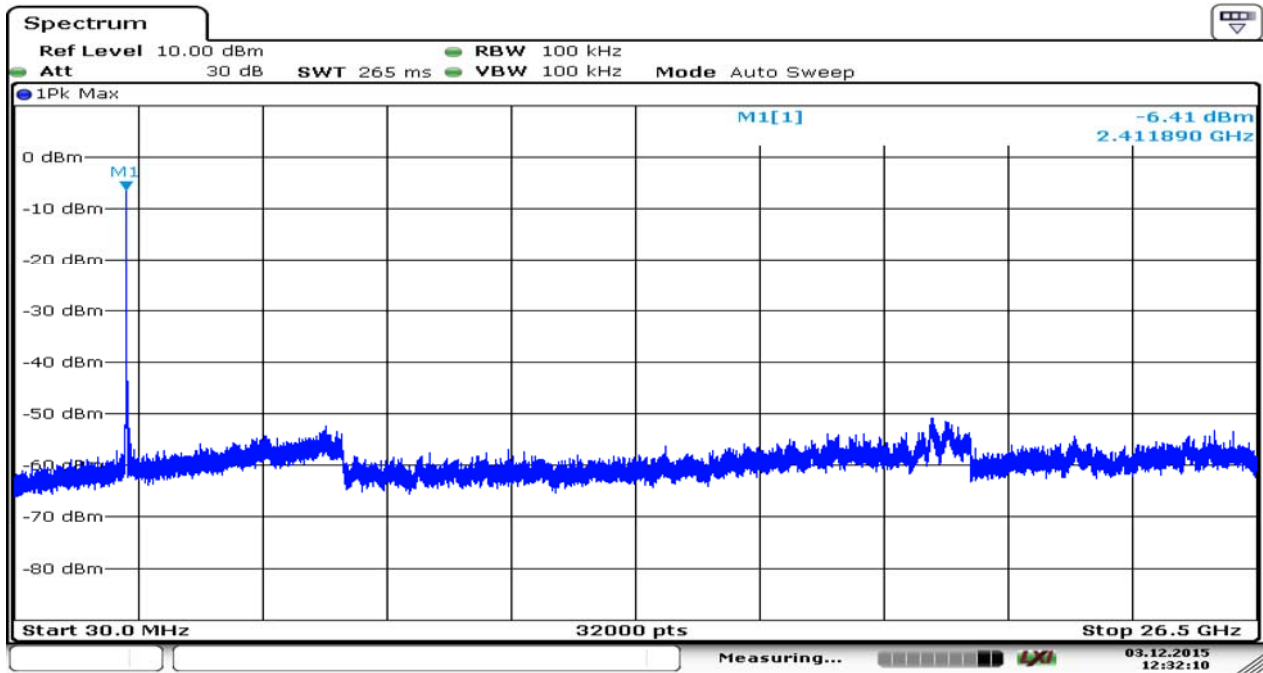

Date: 3.DEC.2015 12:32:10

(ch_6)

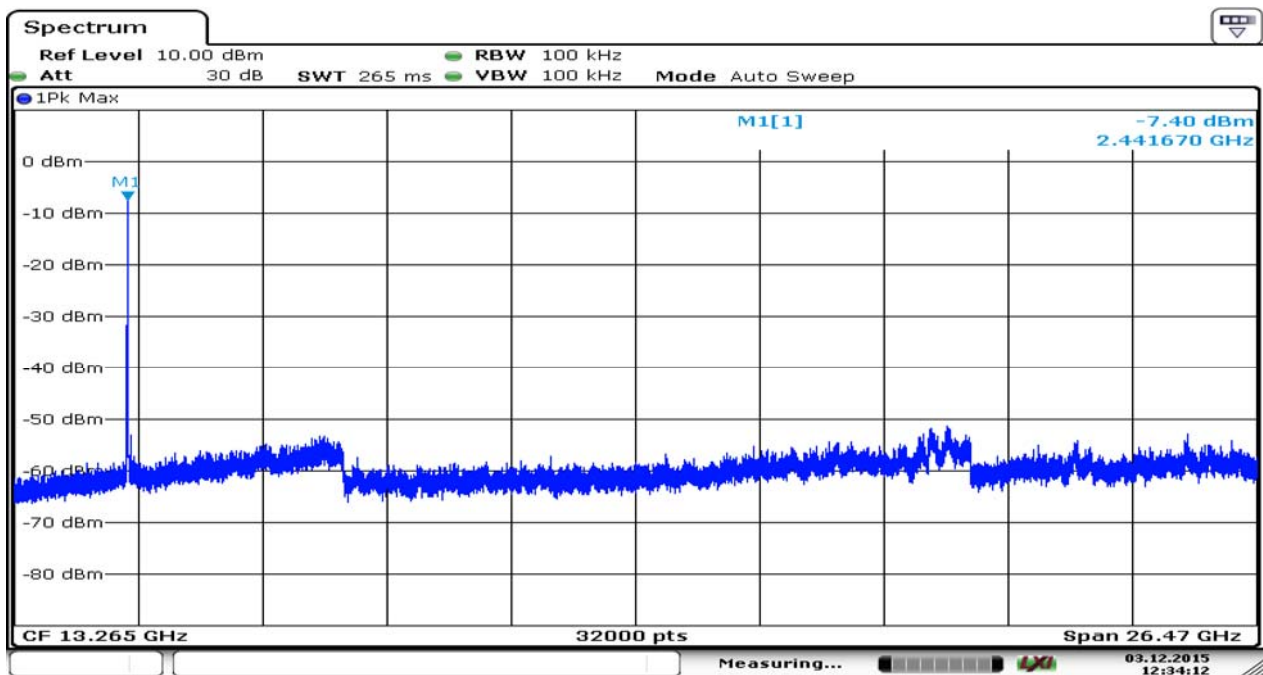

Date: 3.DEC.2015 12:34:12




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of Out of Emission – CCK

(ch_11)

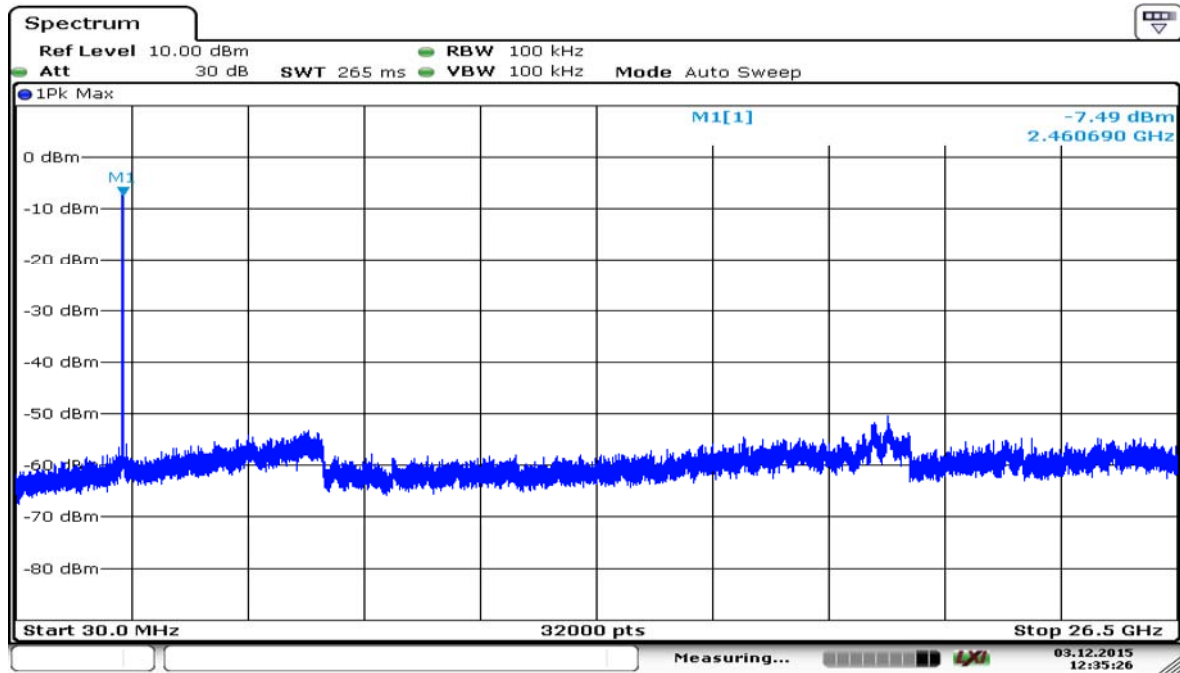

Date: 3.DEC.2015 12:35:26




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


9.4 Trace data of Out of Emission – OFDM

(ch_1)

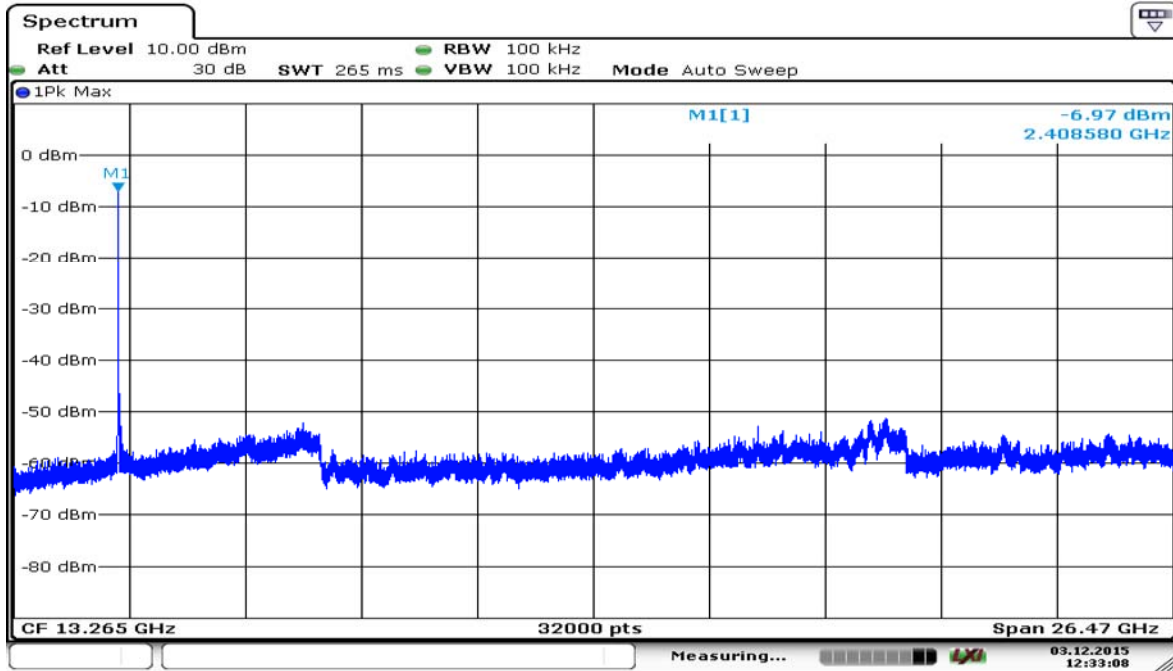

Date: 3.DEC.2015 12:33:08

(ch_6)

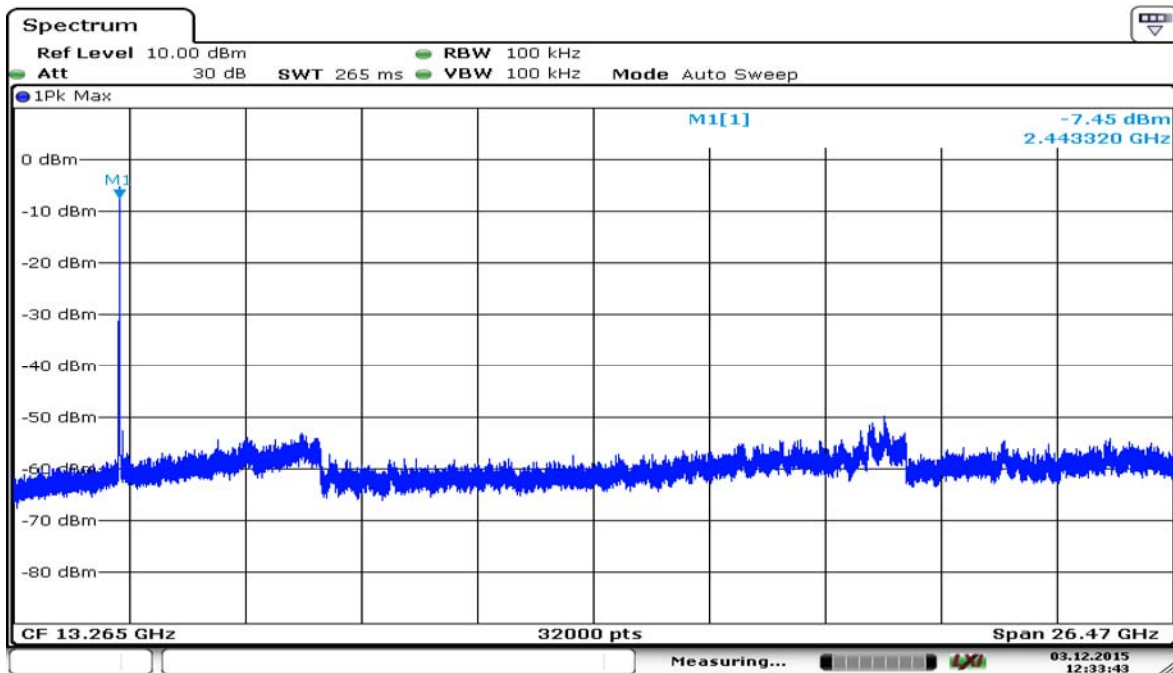

Date: 3.DEC.2015 12:33:43




Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

9.4 Trace data of Out of Emission – OFDM

(ch_11)

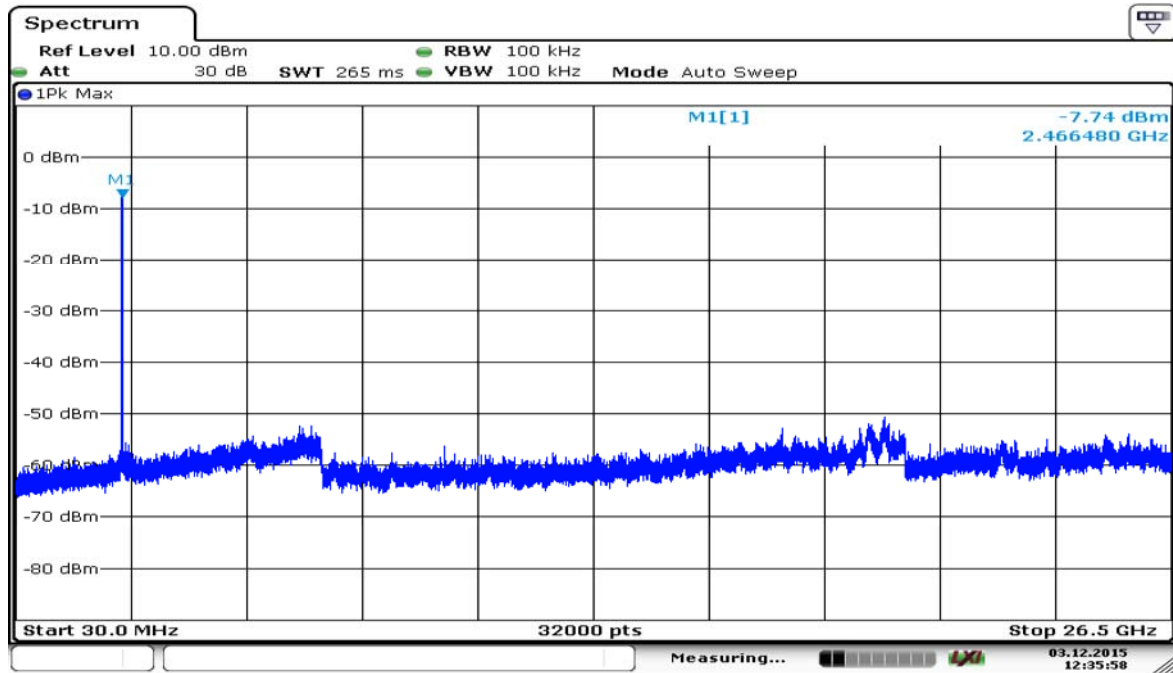

Date: 3.DEC.2015 12:35:58

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209 . The test setup was made according to ANSI C 63.10 (2009) & KDB 558074 D01 Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam. turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

10.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	13-Jan-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	237	4-Mar-16
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00595	13-Jan-16
Horn Antenna	BBHA9120D	SCHWARZBECK	352	7-May-16
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	13-Jan-16
Spectrum Analyzer	R3273	ADVANTEST	110600592	13-Jan-16
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Pyramidal Horn Antenna	3160-09-01	EST-LINDGREN	102642	14-Nov-15
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/642 /28051111/L	-

10.2 Environmental Condition

Below 1 GHz -Test Place : 10 m Semi-anechoic chamber

WLAN 802.11 b,g Mode

Temperature (°C) : (20.8 ~ 22.4) °C

Humidity (% R.H.) : (43.4 ~ 50.0) % R.H.

Above 1 GHz-Test Place : 3 m Semi-anechoic chamber

WLAN 802.11 b,g Mode

Temperature (°C) : 21.4 °C

Humidity (% R.H.) : (40.8 ~ 46.7) % R.H.

**Estech Co., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.3 Measurement Instrument setting for Radiated Emission

10.3.1 Frequency range below 1 GHz

Detector : Quasi-Peak

10.3.2 Frequency range above 1 GHz

Peak Power Measurement Procedure (KDB 558074 section 12.2.4)

- a. RBW : 1 MHz , VBW : 3 MHz
- b. Trace mode = max hold
- c. Detector : Peak
- d. Sweep time = auto

Average Power Measurement Procedures (KDB 558074 section 12.2.5.2)

- a. Set analyzer center frequency to the frequency associated with the emission
- b. RBW : 1 MHz , VBW : 3 MHz
- c. Detector : RMS
- d. Sweep time = auto

* Note

Band	Duty cycle(%)	Ton (ms)	Ton + Toff (ms)	DCF=10*log(1/Duty) (dB)
802.11n	100.0	–	–	0.00

* This was not applied of duty cycle factor for average value because of measured with the EUT transmitting continuously more than 98 % duty cycle at its maximum power control level.



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4 Test Data for Adapter Mode(802.11 b)

Test Date : 14-Oct-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
250.00	23.12	H	1.9	11.70	2.70	46.00	37.52	8.48
528.00	12.94	H	2.2	18.57	3.91	46.00	35.43	10.57
600.00	13.71	V	2.8	20.02	4.18	46.00	37.91	8.09
700.00	11.32	V	1.1	21.10	4.53	46.00	36.95	9.05
800.00	12.59	V	1.2	22.80	4.85	46.00	40.24	5.76
841.50	8.87	H	2.8	23.30	5.00	46.00	37.17	8.83
949.90	8.09	V	2.1	24.33	5.37	46.00	37.79	8.21
Remark	H : Horizontal, V : Vertical TEST MODE : Adapter - CH 6(2 437 MHz) *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *CL = Cable Loss(In case of below 1 000 MHz) *Result Value = Reading + Ant Factor + Cable loss *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4 Test Data for Adapter Mode(802.11 g)

Test Date : 14-Oct-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
450.00	16.43	V	2.1	16.93	3.65	46.00	37.00	9.00
576.00	13.21	H	2.7	19.54	4.10	46.00	36.84	9.16
600.00	12.76	H	1.8	20.02	4.18	46.00	36.96	9.04
700.00	15.68	V	1.7	21.10	4.53	46.00	41.31	4.69
800.00	14.05	V	1.4	22.80	4.85	46.00	41.70	4.30
850.00	9.10	H	1.4	23.40	5.06	46.00	37.56	8.44
960.00	8.87	V	1.2	24.40	5.39	46.00	38.66	7.34
Remark	H : Horizontal, V : Vertical TEST MODE : Adapter - CH 6(2 437 MHz) *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *CL = Cable Loss(In case of below 1 000 MHz) *Result Value = Reading + Ant Factor + Cable loss *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4 Test Data for PoE Mode(802.11 b)

Test Date : 14-Oct-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dBμV)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dBμV/m)	Result (dBμV/m)	Margin (dB)
250.00	20.72	V	1.8	11.70	2.70	46.00	35.12	10.88
450.00	16.18	H	2.2	16.93	3.65	46.00	36.75	9.25
500.00	15.34	V	1.2	18.01	3.81	46.00	37.16	8.84
576.00	13.09	H	1.8	19.54	4.10	46.00	36.72	9.28
700.00	15.70	V	2.2	21.10	4.53	46.00	41.33	4.67
800.00	10.98	V	1.1	22.80	4.85	46.00	38.63	7.37
850.00	9.23	H	1.6	23.40	5.06	46.00	37.69	8.31
949.90	7.55	V	1.2	24.33	5.37	46.00	37.25	8.75
Remark	H : Horizontal, V : Vertical TEST MODE : PoE - CH 6(2 437 MHz) *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *CL = Cable Loss(In case of below 1 000 MHz) *Result Value = Reading + Ant Factor + Cable loss *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4 Test Data for PoE Mode(802.11 g)

Test Date : 14-Oct-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
250.00	24.96	V	1.6	11.70	2.70	46.00	39.36	6.64
576.00	13.66	H	1.6	19.54	4.10	46.00	37.29	8.71
700.00	15.92	V	2.4	21.10	4.53	46.00	41.55	4.45
800.00	14.08	V	1.8	22.80	4.85	46.00	41.73	4.27
849.90	8.66	H	2.1	23.40	5.06	46.00	37.12	8.88
960.00	8.68	V	1.3	24.40	5.39	46.00	38.47	7.53
Remark	H : Horizontal, V : Vertical TEST MODE : PoE - CH 6(2 437 MHz) *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *CL = Cable Loss(In case of below 1 000 MHz) *Result Value = Reading + Ant Factor + Cable loss *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.							



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-1 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2390.00	25.53	H	1.1	27.27	5.62	0.00	74.00	58.42	15.58
2390.00	25.01	V	1.0	27.27	5.62	0.00	74.00	57.90	16.10
4824.00	50.20	H	1.0	31.39	-24.14	0.00	74.00	57.45	16.55
4824.00	51.10	V	1.1	31.39	-24.14	0.00	74.00	58.35	15.65
AV(RBW: 1 MHz VBW: 1 kHz)									
2390.00	15.82	H	1.1	27.27	5.62	0.00	54.00	48.71	5.29
2390.00	16.46	V	1.0	27.27	5.62	0.00	54.00	49.35	4.65
4824.00	40.12	H	1.0	31.39	-24.14	0.00	54.00	47.37	6.63
4824.00	41.22	V	1.1	31.39	-24.14	0.00	54.00	48.47	5.53
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 b(Adapter) – CH 1(2 412 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-2 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2390.00	25.51	H	1.0	27.27	5.62	0.00	74.00	58.40	15.60
2390.00	24.96	V	1.1	27.27	5.62	0.00	74.00	57.85	16.15
4876.00	51.40	H	1.1	31.50	-23.99	0.00	74.00	58.91	15.09
4876.00	51.62	V	1.2	31.50	-23.99	0.00	74.00	59.13	14.87
AV(RBW: 1 MHz VBW: 1 kHz)									
2390.00	16.01	H	1.0	27.27	5.62	0.00	54.00	48.90	5.10
2390.00	16.11	V	1.1	27.27	5.62	0.00	54.00	49.00	5.00
4876.00	40.12	H	1.1	31.50	-23.99	0.00	74.00	47.63	26.37
4876.00	41.12	V	1.2	31.50	-23.99	0.00	74.00	48.63	25.37
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 b(Adapter) – CH 6(2 437 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-3 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	26.06	H	1.0	27.55	5.72	0.00	74.00	59.33	14.67
2483.50	23.68	V	1.0	27.55	5.72	0.00	74.00	56.95	17.05
4804.00	52.16	H	1.1	31.35	-24.20	0.00	74.00	59.31	14.69
4804.00	51.97	V	1.1	31.35	-24.20	0.00	74.00	59.12	14.88
AV(RBW: 1 MHz VBW: 1 kHz)									
2483.50	16.16	H	1.0	27.55	5.72	0.00	54.00	49.43	4.57
2483.50	16.31	V	1.0	27.55	5.72	0.00	54.00	49.58	4.42
4804.00	40.82	H	1.1	31.35	-24.20	0.00	54.00	47.97	6.03
4804.00	41.78	V	1.1	31.35	-24.20	0.00	54.00	48.93	5.07
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 b(Adapter) – CH 11(2 462 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-1 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μV)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μV /m)	Result (dB μV /m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2360.00	24.51	H	1.0	27.19	5.62	0.00	74.00	57.32	16.68
2360.00	27.00	V	1.1	27.19	5.62	0.00	74.00	59.81	14.19
2390.00	24.53	H	1.0	27.27	5.62	0.00	74.00	57.42	16.58
2390.00	25.10	V	1.0	27.27	5.62	0.00	74.00	57.99	16.01
4824.00	51.32	H	1.1	31.39	-24.14	0.00	74.00	58.57	15.43
4824.00	52.01	V	1.0	31.39	-24.14	0.00	74.00	59.26	14.74
AV(RBW: 1 MHz VBW: 1 kHz)									
2360.00	16.88	H	1.0	27.19	5.62	0.00	54.00	49.69	4.31
2360.00	16.65	V	1.1	27.19	5.62	0.00	54.00	49.46	4.54
2390.00	16.91	H	1.0	27.27	5.62	0.00	54.00	49.80	4.20
2390.00	16.58	V	1.0	27.27	5.62	0.00	54.00	49.47	4.53
4824.00	41.24	H	1.1	31.39	-24.14	0.00	54.00	48.49	5.51
4824.00	41.72	V	1.0	31.39	-24.14	0.00	54.00	48.97	5.03
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 b(Adapter) – CH 1(2 412 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-5 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	26.68	H	1.0	27.55	5.80	0.00	74.00	60.03	13.97
2483.50	24.86	V	1.0	27.55	5.80	0.00	74.00	58.21	15.79
2489.35	25.85	H	1.0	27.57	5.80	0.00	74.00	59.22	14.78
2490.50	26.28	V	1.0	27.57	5.80	0.00	74.00	59.65	14.35
4960.00	45.35	H	1.0	31.68	-23.87	0.00	74.00	53.17	20.83
4960.00	45.52	V	1.0	31.68	-23.87	0.00	74.00	53.34	20.66
AV(RBW: 1 MHz VBW: 1 kHz)									
2483.50	14.02	H	1.0	27.55	5.80	0.00	54.00	47.37	6.63
2483.50	13.18	V	1.0	27.55	5.80	0.00	54.00	46.53	7.47
2489.35	12.96	H	1.0	27.57	5.80	0.00	54.00	46.33	7.67
2490.50	12.93	V	1.0	27.57	5.80	0.00	54.00	46.30	7.70
4960.00	33.42	H	1.0	31.68	-23.87	0.00	54.00	41.24	12.76
4960.00	33.02	V	1.0	31.68	-23.87	0.00	54.00	40.84	13.16
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 g(Adapter) – CH 6(2 437 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

10.4-6 Test Data

Test Date : 11-Nov-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	25.27	H	1.0	27.55	5.72	0.00	74.00	58.54	15.46
2483.50	24.61	V	1.0	27.55	5.72	0.00	74.00	57.88	16.12
4925.01	52.16	H	1.0	31.61	-23.90	0.00	74.00	59.87	14.13
4925.01	51.78	V	1.0	31.61	-23.90	0.00	74.00	59.49	14.51
AV(RBW: 1 MHz VBW: 1 kHz)									
2483.50	16.49	H	1.0	27.55	5.72	0.00	54.00	49.76	4.24
2483.50	16.60	V	1.0	27.55	5.72	0.00	54.00	49.87	4.13
4925.01	41.12	H	1.0	31.61	-23.90	0.00	54.00	48.83	5.17
4925.01	42.11	V	1.0	31.61	-23.90	0.00	54.00	49.82	4.18
Remark	H : Horizontal, V : Vertical TEST MODE : 802.11 g(Adapter) – CH 11(2 462 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr


10.4-4 Restricted Band Edges

*802.11b Mode

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

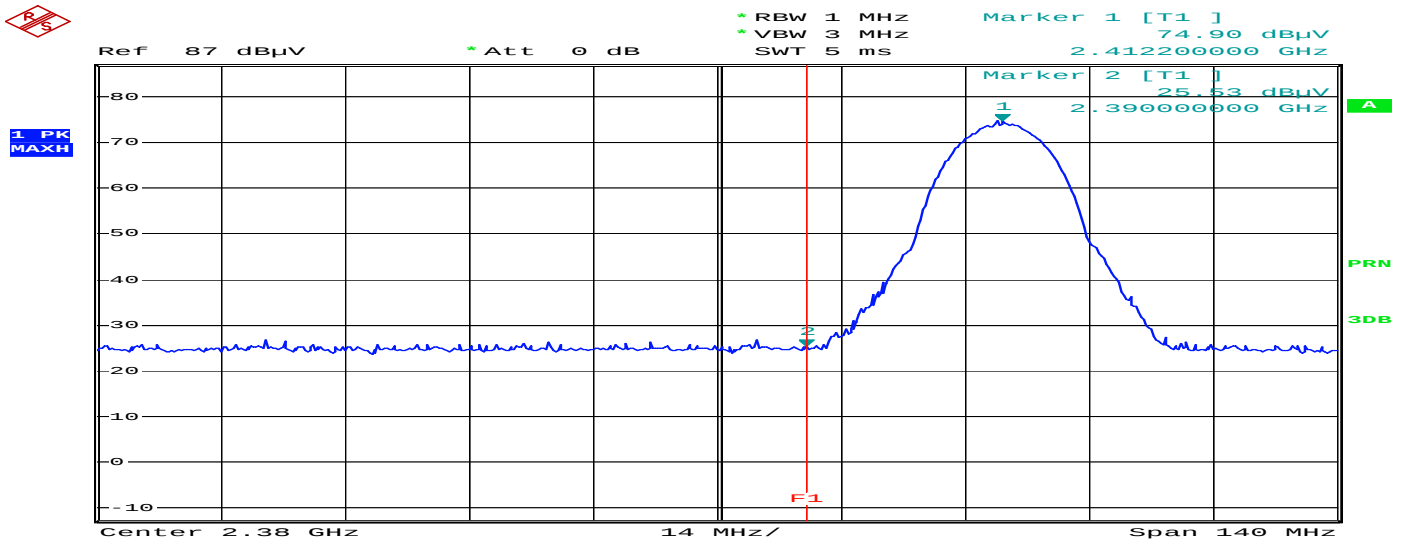

Comment: 15-01896_HOR(b_2412MHz_PK)
Date: 11.NOV.2015 16:47:56

Detector mode:Average

Polarity:Horizontal

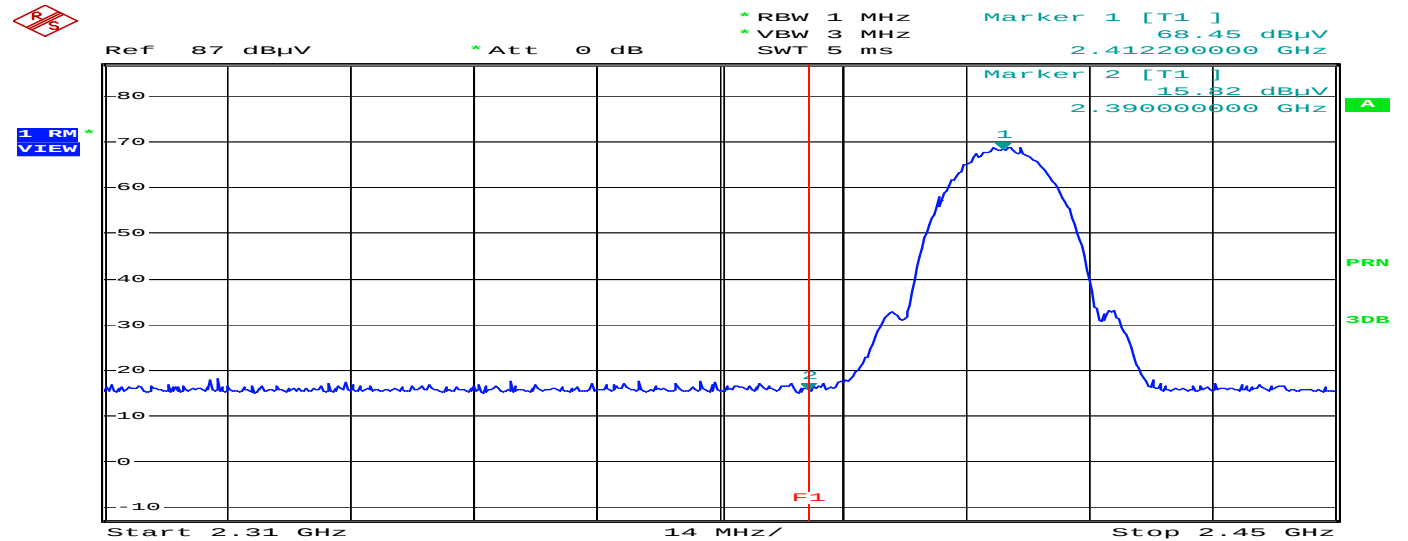

Comment: 15-01896_HOR(b_2412MHz_RM)
Date: 11.NOV.2015 16:51:28



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

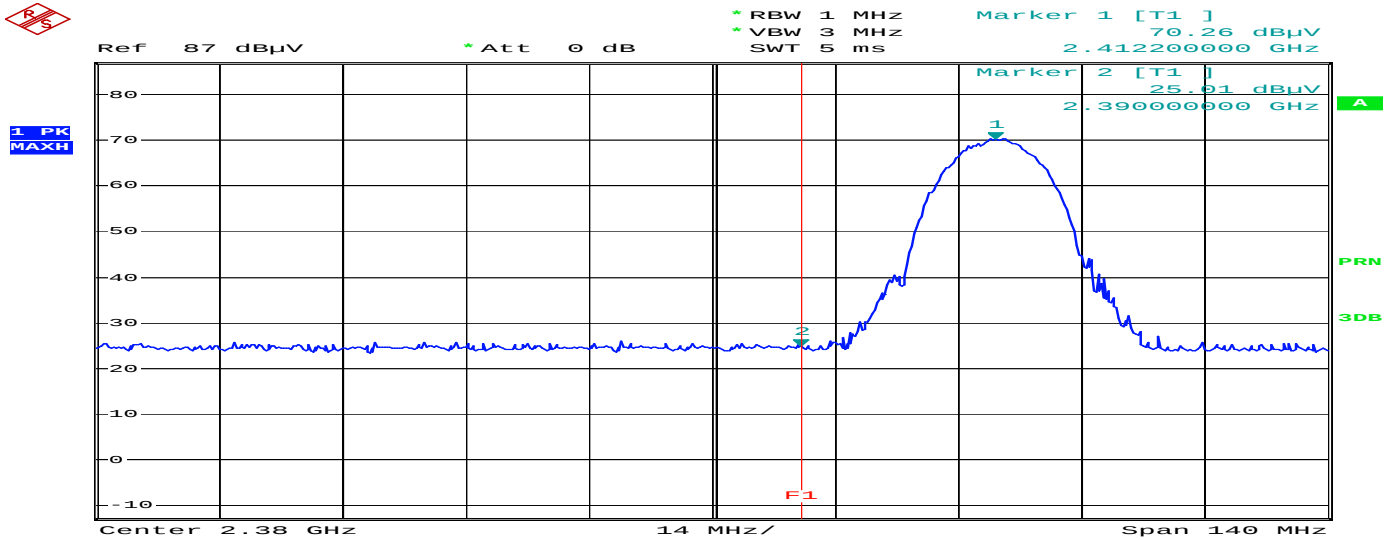

Comment : 15-01896_VER(b_2412MHz_PK)
Date : 11.NOV.2015 16:46:00

Detector mode:Average

Polarity:Vertical

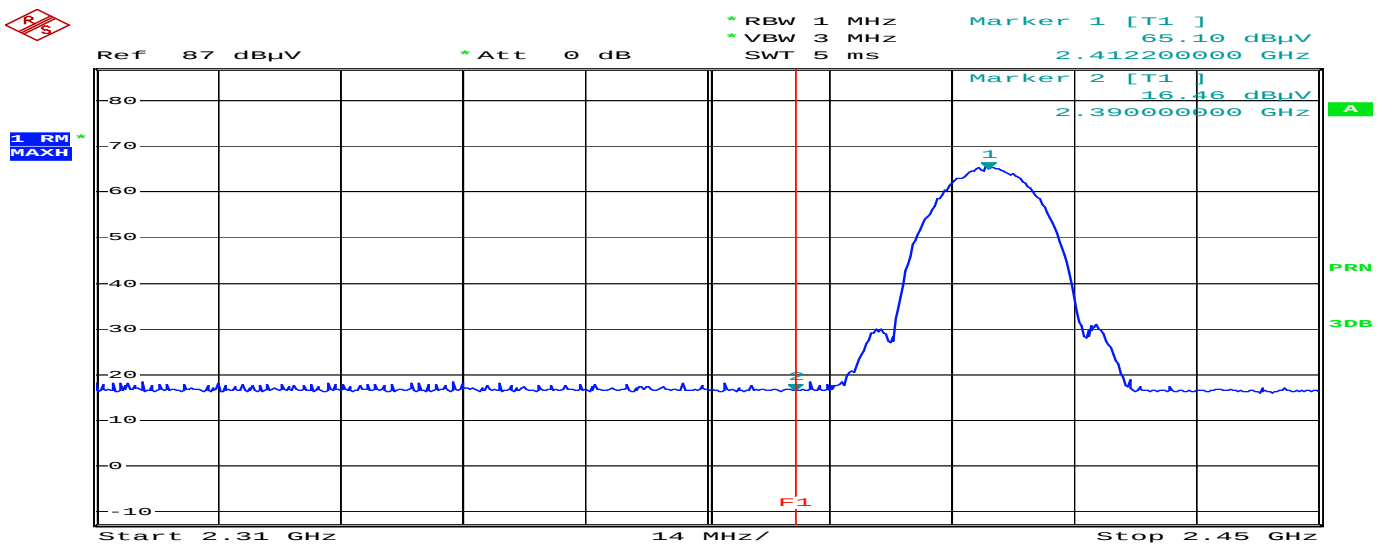

Comment : 15-01896_VER(b_2412MHz_RM)
Date : 11.NOV.2015 16:43:41



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

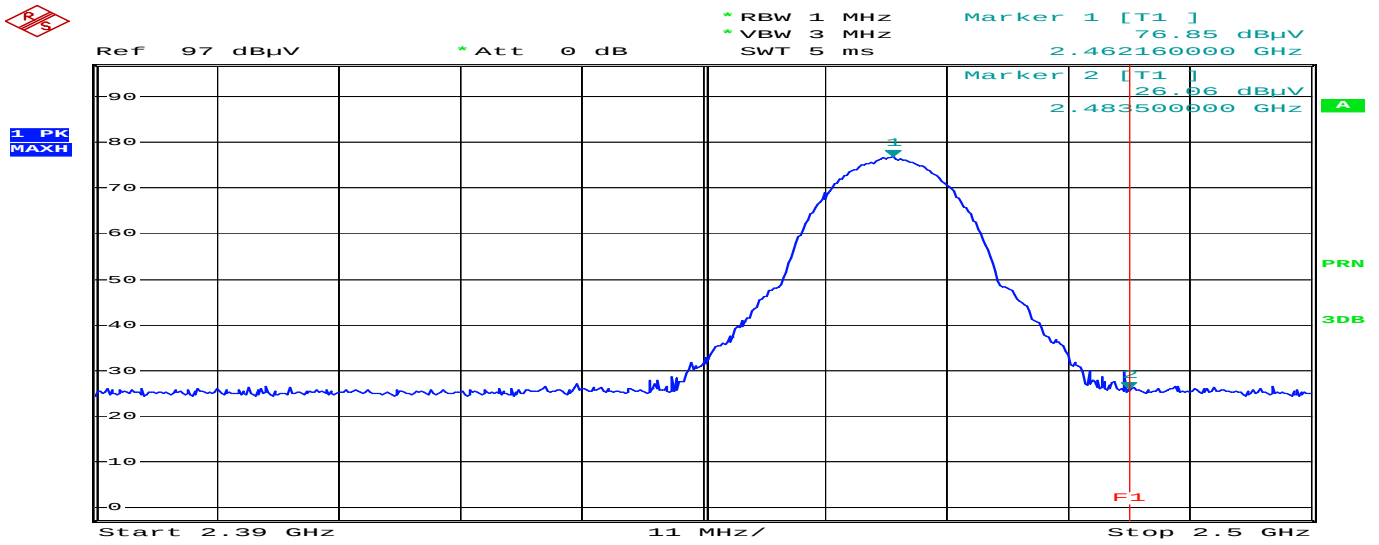

Comment: 15-01896_HOR(b_2462 MHz_PK)
Date: 11.NOV.2015 20:39:38

Detector mode:Average

Polarity:Horizontal

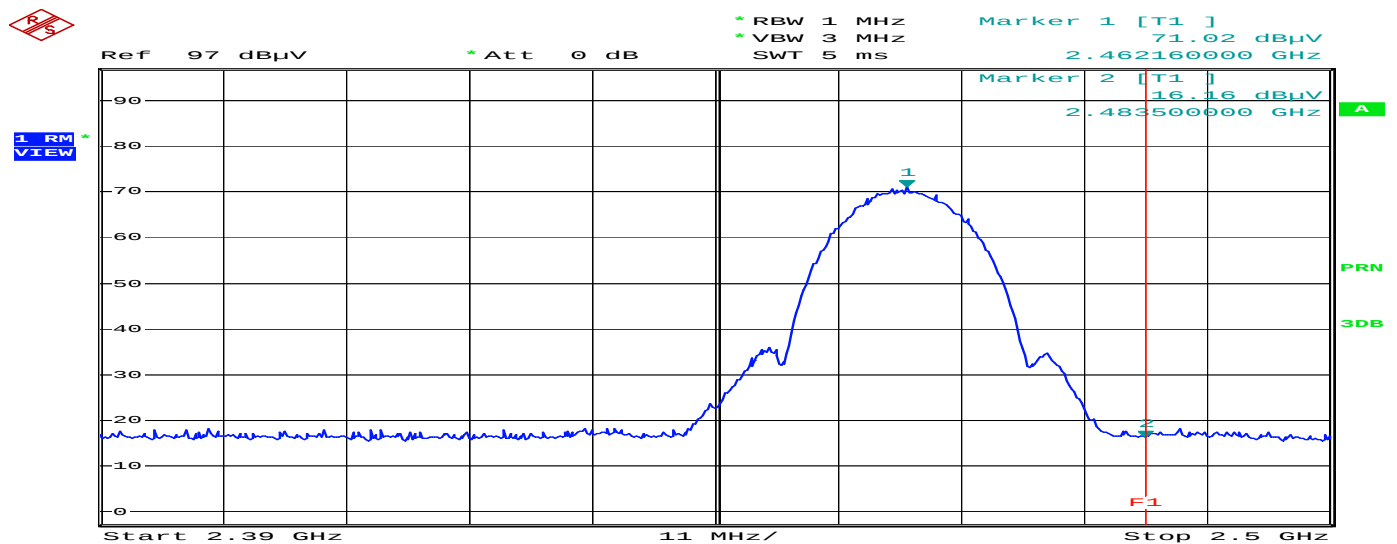

Comment: 15-01896_HOR(b_2462 MHz_RM)
Date: 11.NOV.2015 20:37:21



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

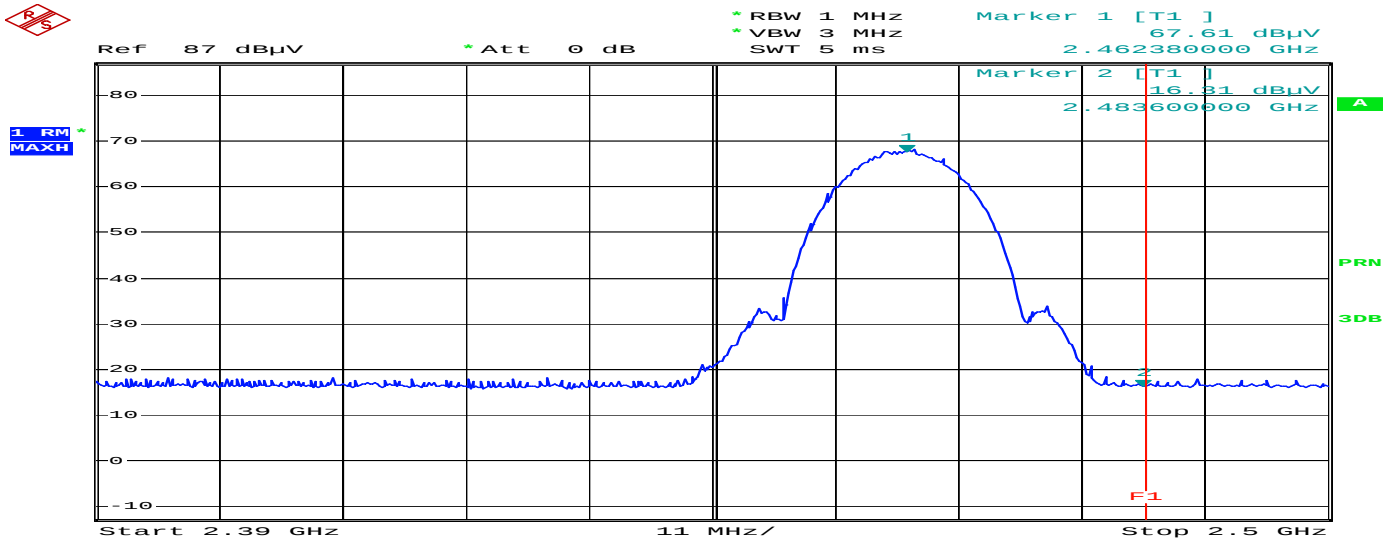

Comment : 15-01896_VER(b_2462MHz_CAV)
Date: 11.NOV.2015 10:46:56

Detector mode:Average

Polarity:Vertical

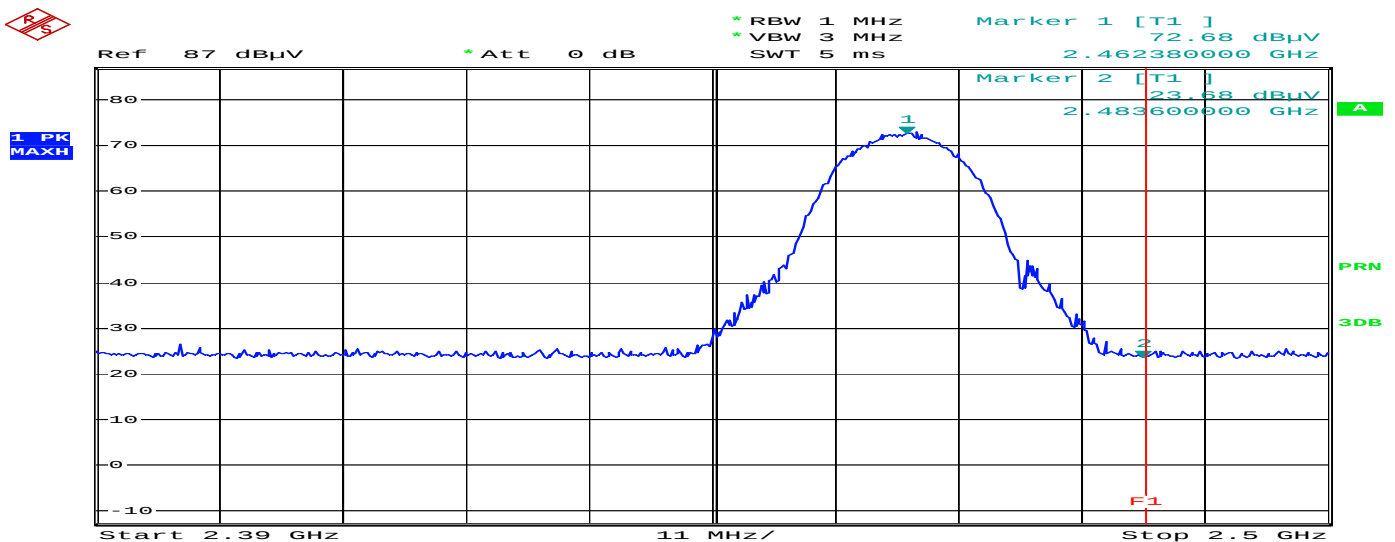

Comment : 15-01896_VER(b_2462MHz_PK)
Date: 11.NOV.2015 10:49:01



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

*802.11g Mode

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

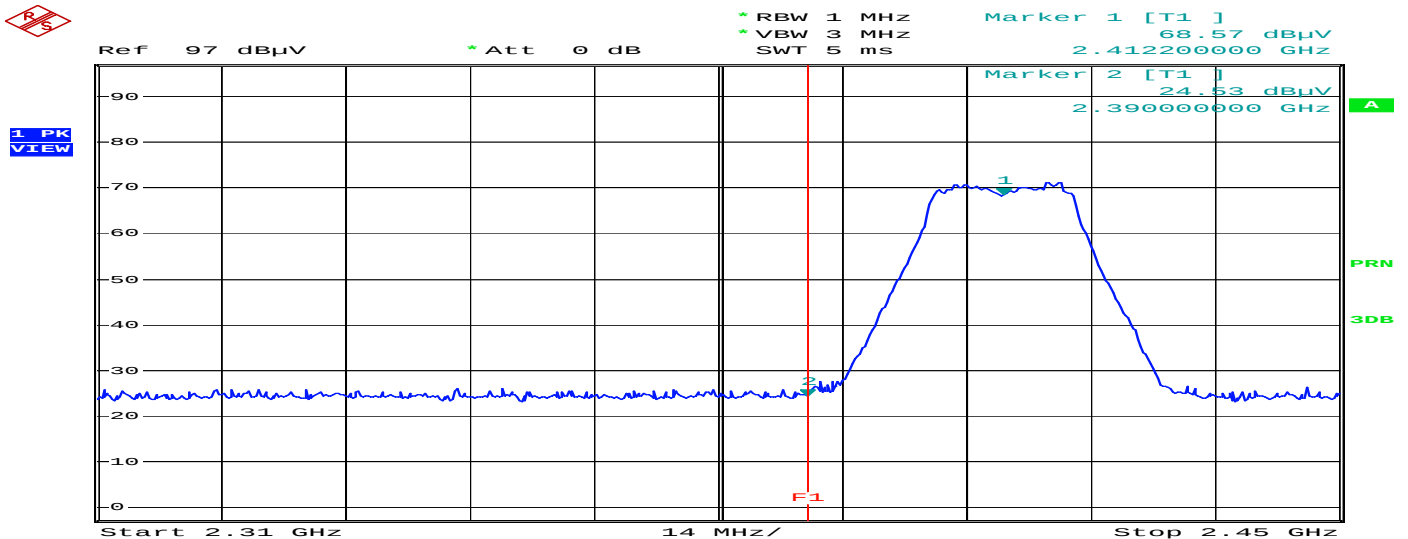

Comment: 15-01896_HOR(g_2412_MHz_PK)
Date: 12.NOV.2015 09:24:56

Detector mode:Average

Polarity:Horizontal

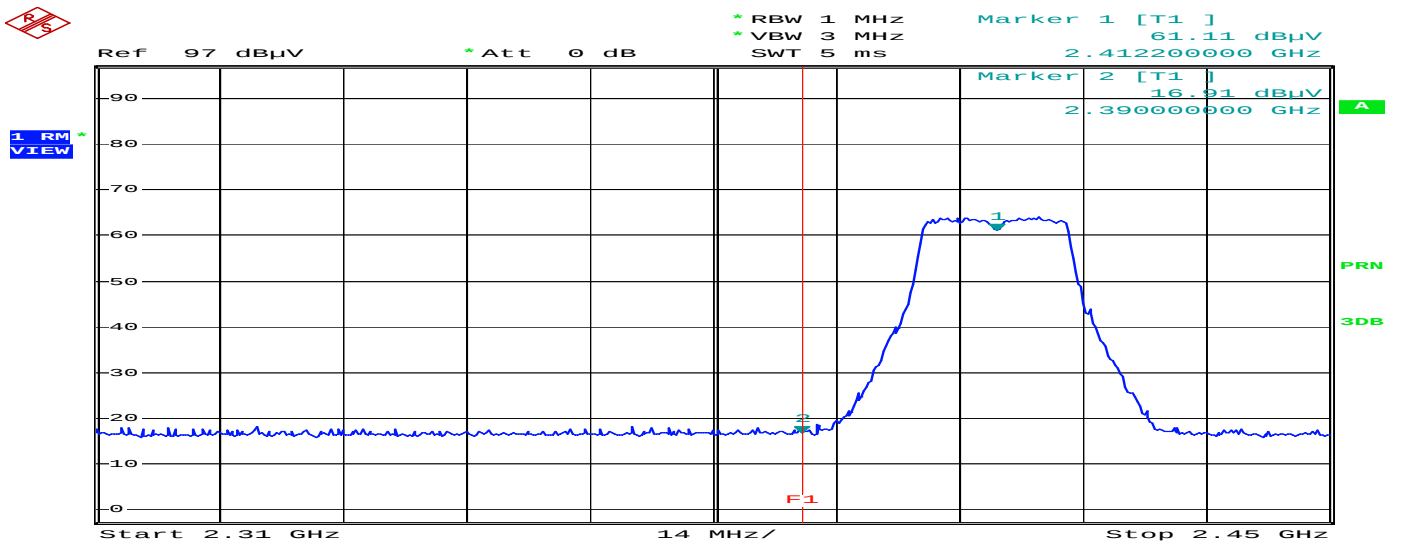

Comment: 15-01896_HOR(g_2412_MHz_RM)
Date: 12.NOV.2015 09:23:10



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

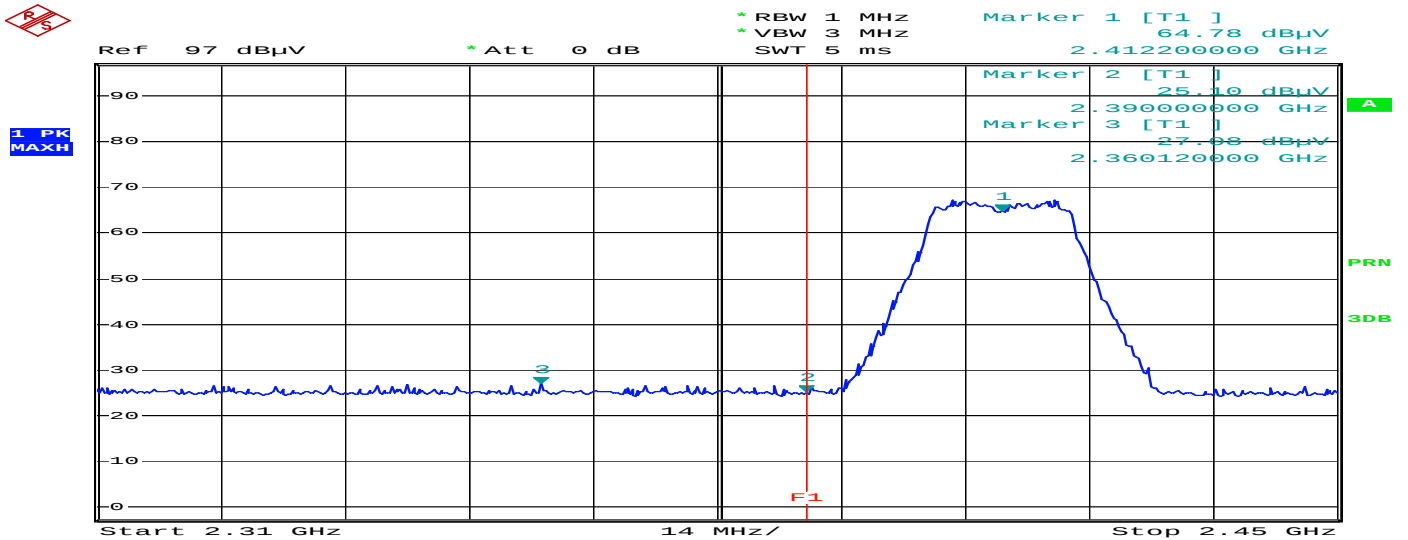

Comment : 15-01896_VER(g_2412 MHz_PK)
Date : 12.NOV.2015 09:26:52

Detector mode:Average

Polarity:Vertical

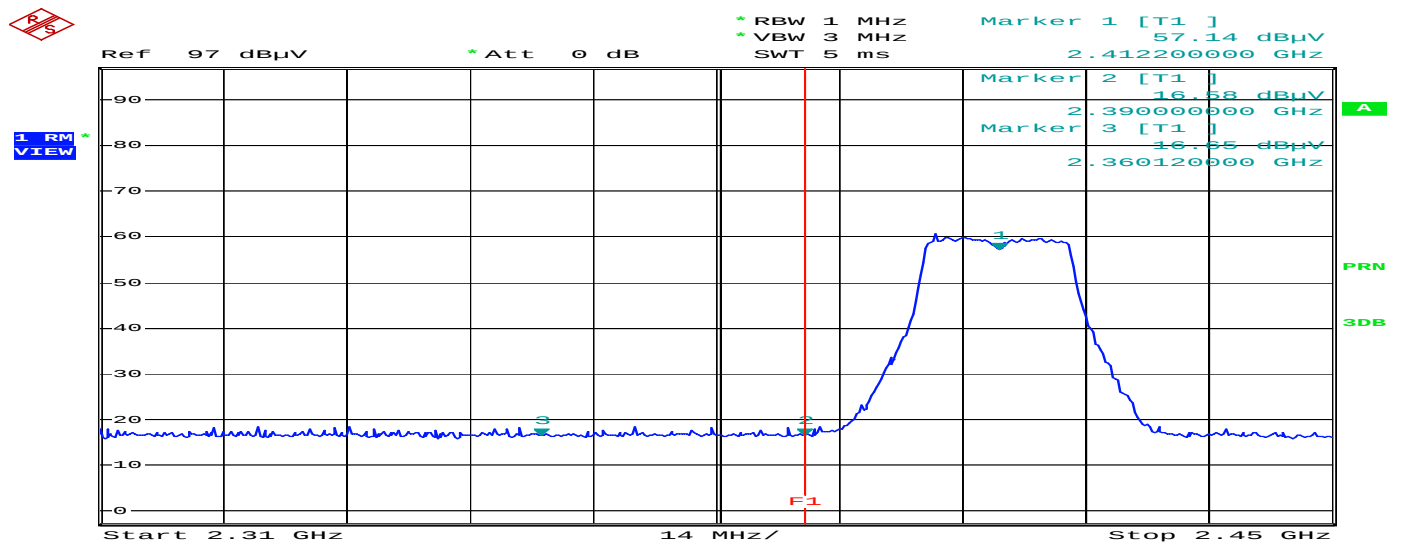

Comment : 15-01896_VER(g_2412 MHz_RM)
Date : 12.NOV.2015 09:29:39



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH High)

Detector mode:Peak

Polarity:Horizontal

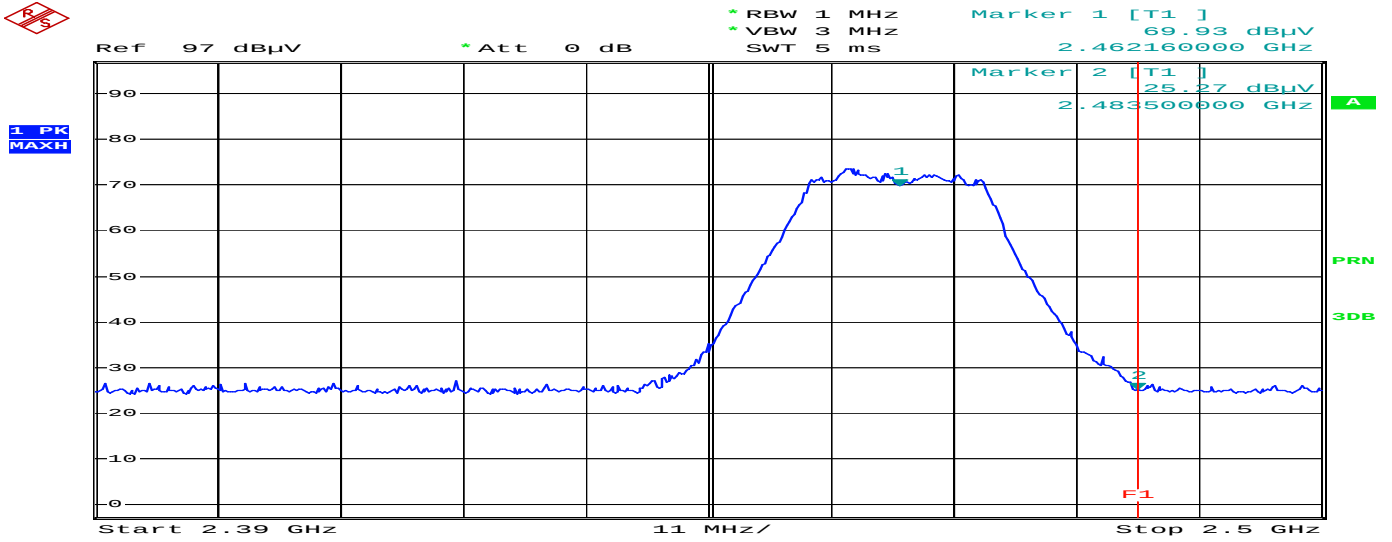


Comment: 15-01896_HOR(g_2462 MHz_PK)

Date: 11.NOV.2015 20:48:46

Detector mode:Average

Polarity:Horizontal

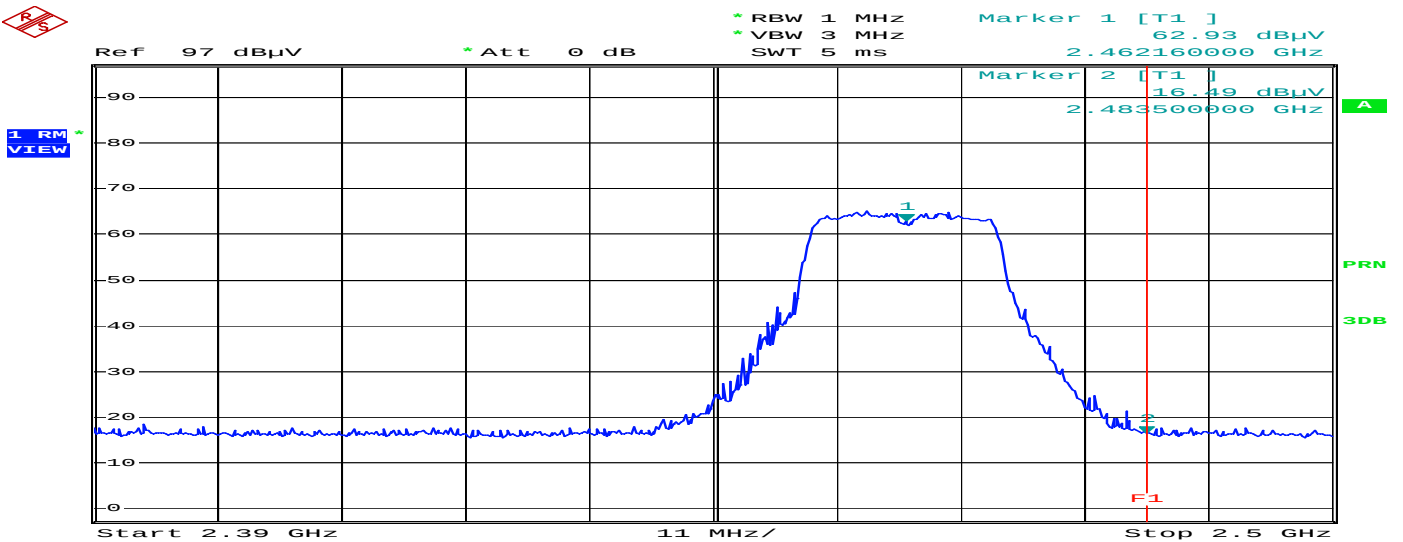

Comment: 15-01896_HOR(g_2462 MHz_RM)

Date: 11.NOV.2015 20:50:15



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

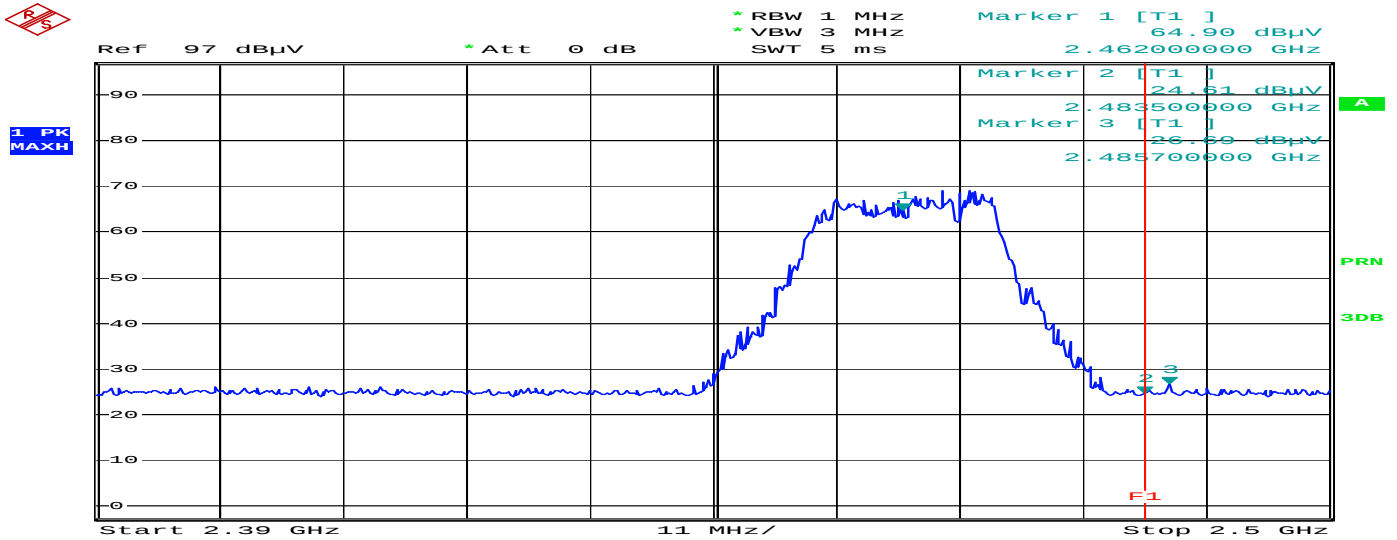

Comment : 15-01896_VER(g_2462 MHz_PK)
Date : 12.NOV.2015 09:38:33

Detector mode:Average

Polarity:Vertical

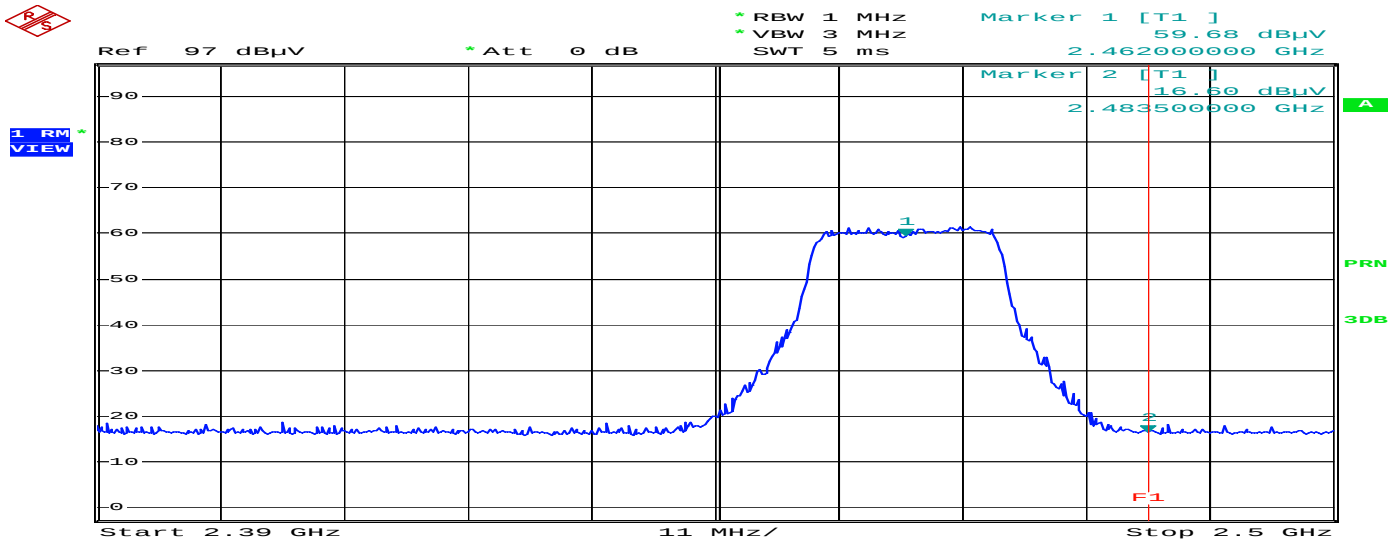

Comment : 15-01896_VER(g_2462 MHz_RM)
Date : 12.NOV.2015 09:35:40

**Estech Co., Ltd.**347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

11. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.10 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	13-Jan-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	13-Jan-16
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	13-Jan-16

11.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 21.8 °C

Humidity (% R.H.) : (32.9 ~ 34.1) % R.H.



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

11.3 Test Data(Adapter- 802.11b)

Test Date : 14-Oct-15

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dBμV)	Reading (dBμV)	Result (dBμV)	Limit (dBμV)	Reading (dBμV)	Result (dB)
0.20	0.11	0.13	H	63.61	42.29	42.53	53.61	33.50	33.74
8.45	0.34	0.31	H	60.00	41.28	41.93	50.00	35.22	35.87
8.79	0.31	0.31	N	60.00	35.93	36.55	50.00	27.39	28.01
9.18	0.35	0.32	H	60.00	45.81	46.48	50.00	40.54	41.21
9.25	0.31	0.32	N	60.00	36.38	37.01	50.00	30.50	31.13
9.72	0.36	0.33	H	60.00	38.63	39.31	50.00	32.09	32.78
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

11.3 Test Data(Adapter – 802.11g)

Test Date : 14-Oct-15

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dBμV)	Reading (dBμV)	Result (dBμV)	Limit (dBμV)	Reading (dBμV)	Result (dB)
0.19	0.10	0.13	N	64.04	41.97	42.20	54.04	33.20	33.43
0.20	0.10	0.13	H	63.61	42.48	42.71	53.61	33.64	33.87
8.05	0.30	0.30	H	60.00	38.64	39.24	50.00	33.83	34.43
8.52	0.31	0.31	N	60.00	41.33	41.95	50.00	32.95	33.57
9.18	0.31	0.32	H	60.00	45.23	45.86	50.00	39.04	39.67
9.25	0.31	0.32	N	60.00	44.46	45.09	50.00	38.43	39.06
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								



Estech Co., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

12. Photographs of test setup

12.1. Setup for Radiated Test : (30 ~ 1 000) MHz

[Front]

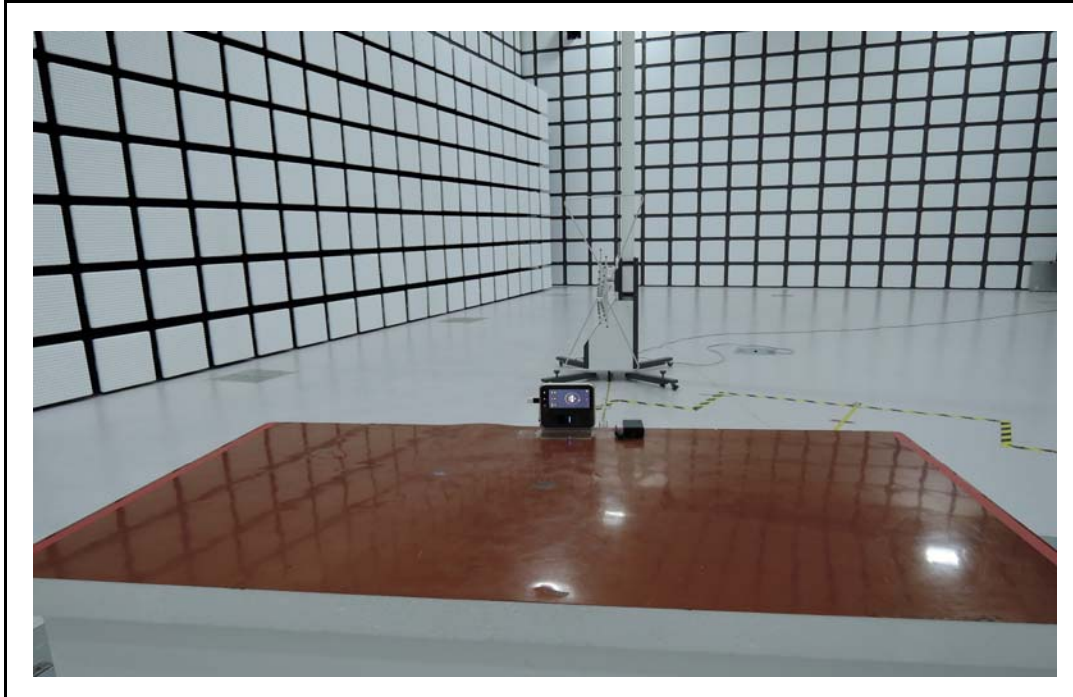

[Rear]






Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

12.2. Setup for Radiated Test : Above 1 GHz

[Front]

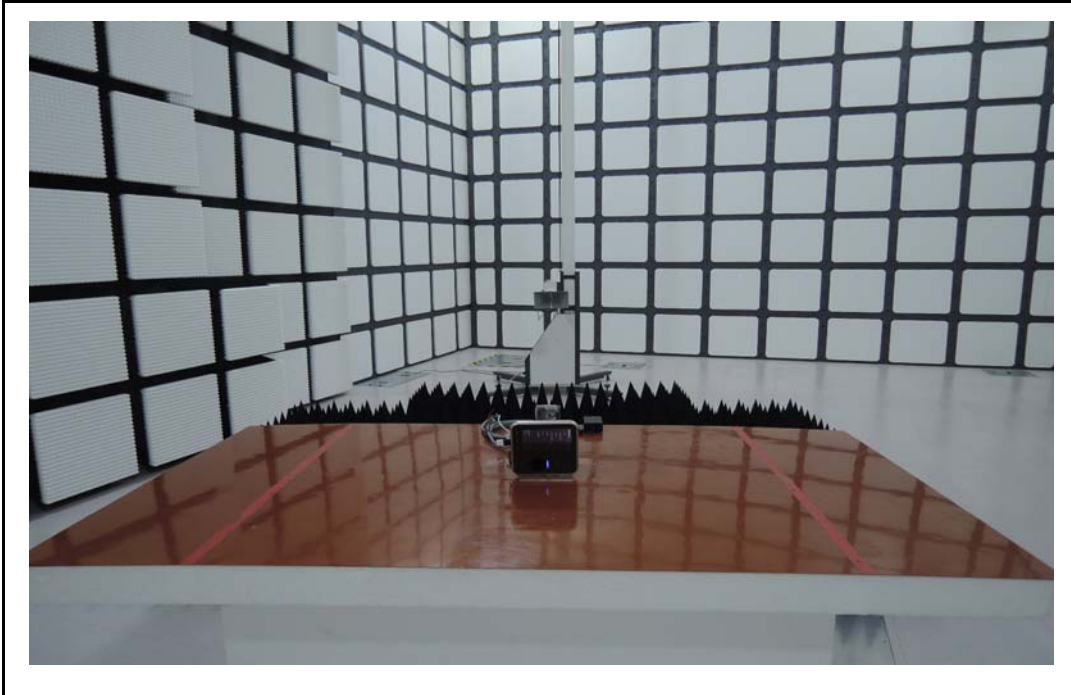

[Rear]

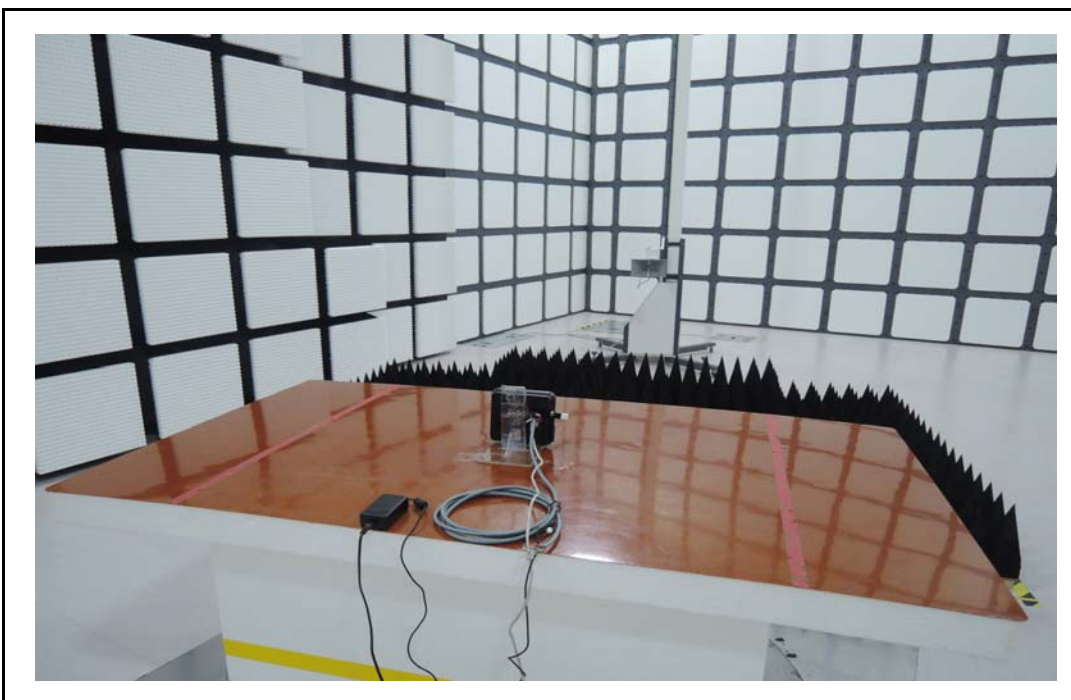



Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea

TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

12.3. Setup for Conducted Test : (0.15 ~ 30) MHz

[Front]



[Rear]





Estech Co., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea


TEL : +82 31 6318037 FAX : +82 31 6318039 www.estech.co.kr

12.4. Photographs of EUT

[Front]




[Rear]

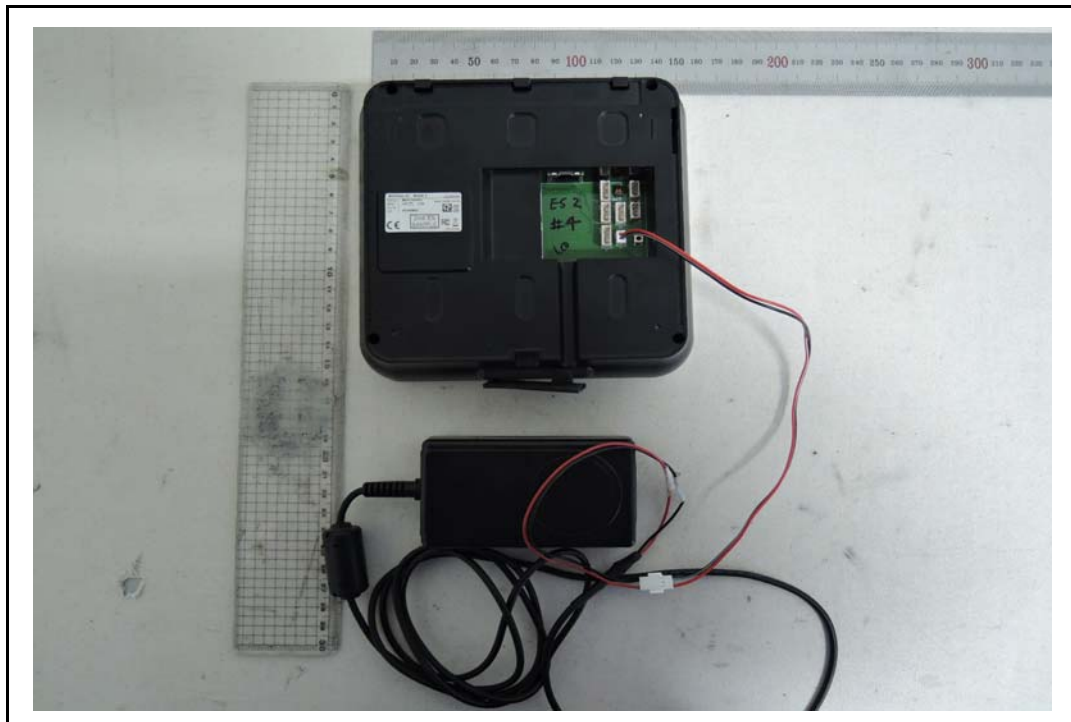


Appendix 1. Special diagram(Adapter-802.11b Mode)

* HOT LINE

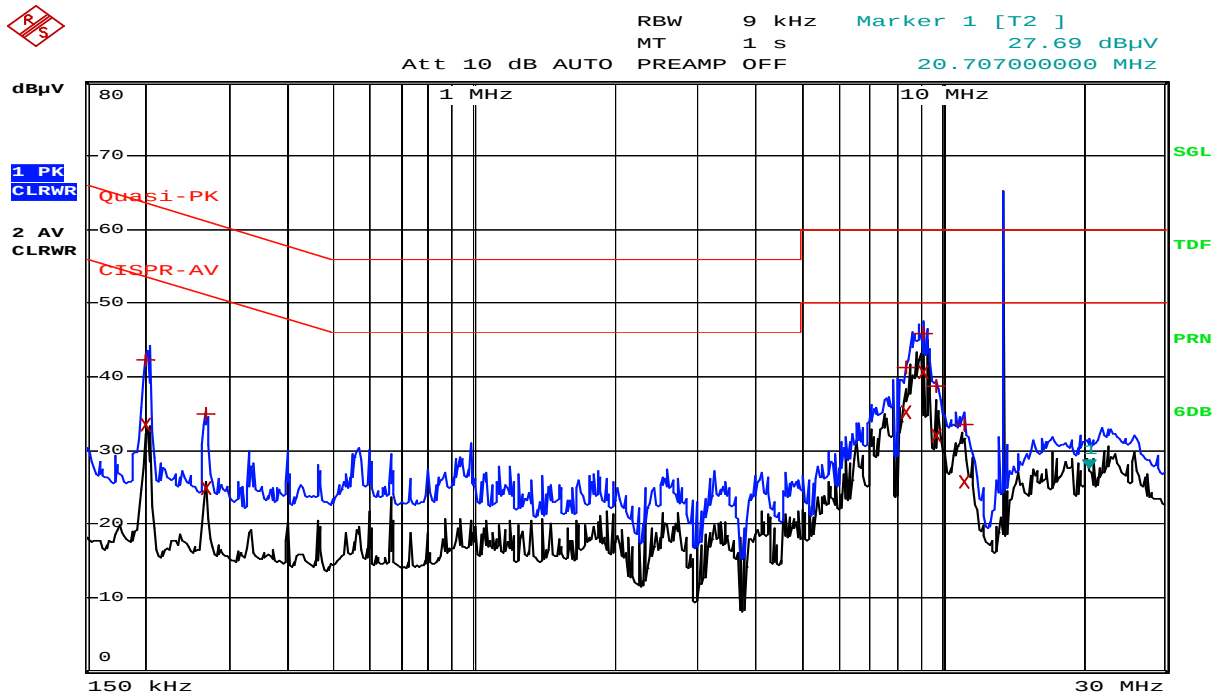

Comment: 15-01896_HOT(802.11 b_7 CH)
Date: 14.OCT.2015 09:38:26

* NEUTRAL LINE

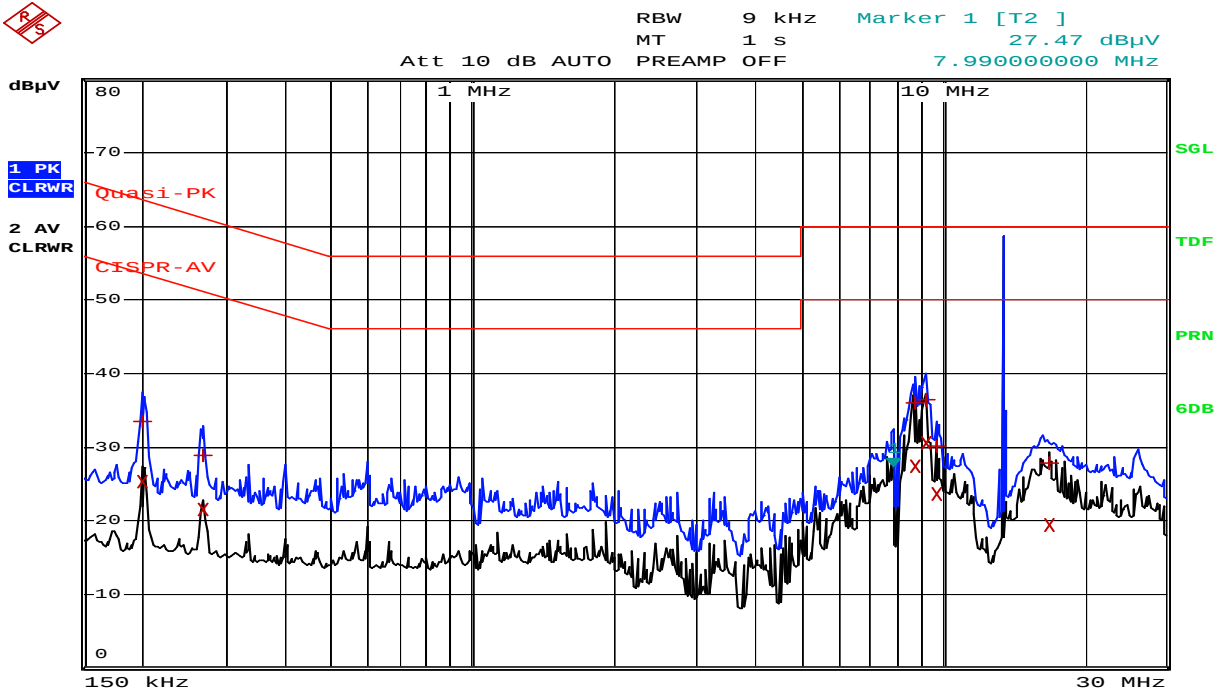


Comment: 15-01896_NEUTRAL(802.11 b_7 CH)
Date: 14.OCT.2015 09:31:16

👉 Remark : Limit over graph is RF band(13.56 MHz band)


Appendix 2. Special diagram(Adapter-802.11g Mode)

* HOT LINE

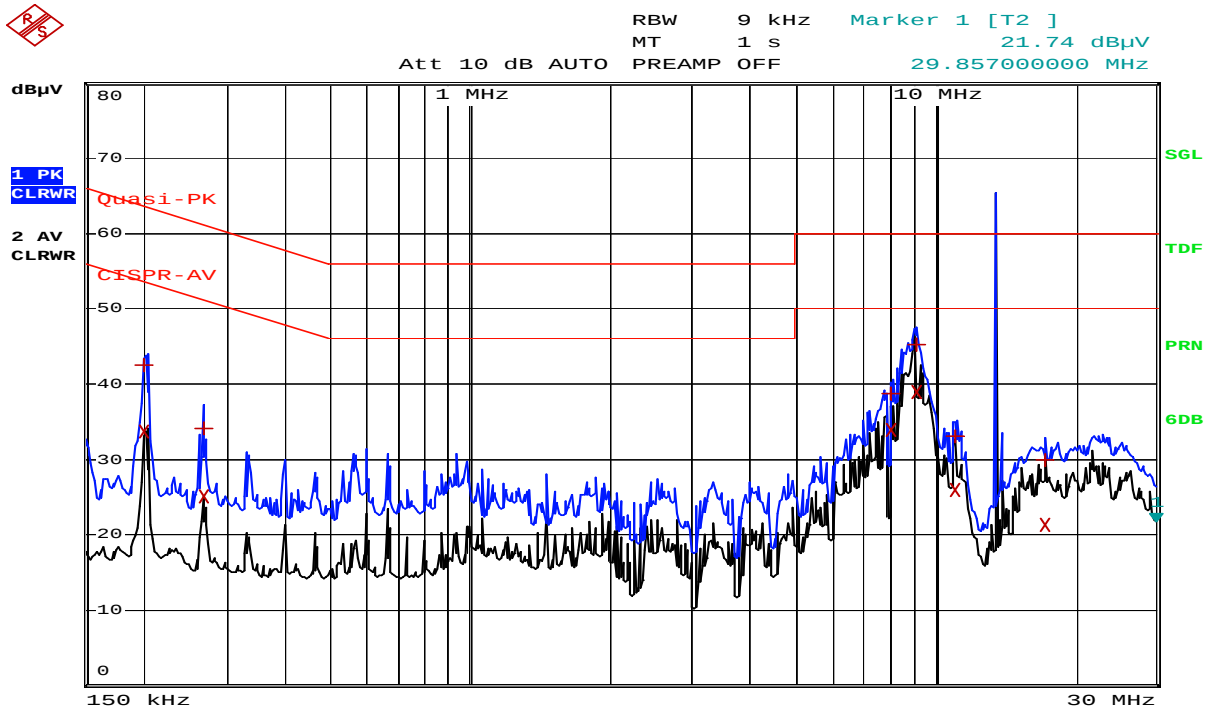

Comment: 15-01896_HOT(802.11 g_7 CH)
Date: 14.OCT.2015 10:14:38

* NEUTRAL LINE

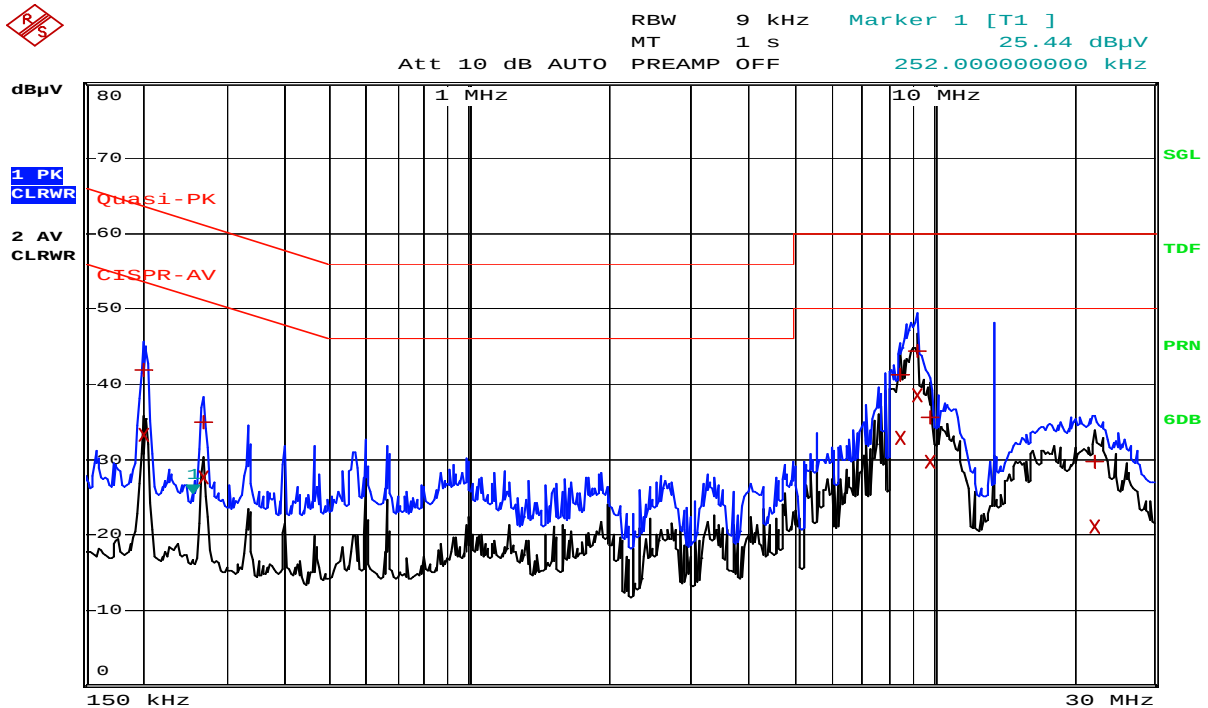

Comment: 15-01896_NEUTRAL(802.11 g_7 CH)
Date: 14.OCT.2015 10:18:00

☞ Remark : Limit over graph is RF band(13.56 MHz band)

Appendix 3. Antenna Requirement

1. Antenna Requirement

1.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.204

1.2 Antenna Connected Construction

The antenna types used in this product are Intergrated SMD antenna . The maximum Gain of this antenna is 2.1 dBi.