



Antenna Measurement Report	
Model: ANT010-DAU/ ANT003/ A245005N/ A2405N/ A5005N/ A245004/ A245002	
Equipment Name: ANT010-DAU/ ANT003/ A245005N/ A2405N/ A5005N/ A245004/ A245002	
Brand (Trade) Name: AsiaRF	
Applicant: AsiaRF Co., Ltd. 1F, 7, Houde Street, Yonghe Dist. New Taipei City, 23455, Taiwan	
Manufacturer: AsiaRF Co., Ltd. 1F, 7, Houde Street, Yonghe Dist. New Taipei City, 23455, Taiwan	
Antenna Type: Dipole / PCB	
Tested by (name / position & signature)	Saul Wang / Engineer 2025/3/25 
Approved by (name / position & signature)	Lorien Chang / Manager 2025/3/25 
Date of issue 2025/3/25	

Index

Competences and guarantees 3

General conditions 3

Data provided by the client 3

Testing period and place 4

Document history 4

Environmental conditions 4

Testing verdicts 4

Used Equipment 4

Appendix A: Test results 5

Competences and guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification.

Data provided by the client

The following data has been provided by the client:

1. No

DEKRA Testing and Certification declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Testing period and place

Test Location	DEKRA Testing and Certification No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411 , Taiwan
Date (start)	2025/3/17
Date (finish)	2025/3/17

Document history

Report number	Revision	Date	Description
2530504R-A324340030S-A	Rev. 1.0	2025/3/25	First release

Environmental conditions

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	22 °C – 28 °C
Relative Humidity air	< 60%

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Infomation:	Info
Not measured:	N/M

Used Equipment

Name	Manufacturer	Type/Model	Serial Number	Calibration
				Last Cal.
Vector Network Analyzer	R&S	ZNB 8	106333	2024/5/15
Measurement Software	ETS-Lindgren	EMQuest 1.17	1474	N/A

Appendix A: Test results

INDEX

1. TEST CONDITIONS7

1.1 Power supply (V).....7

1.2 Temperature (°C).....7

1.3 Device orientation and Setup Requirements.....7

2. TEST RESULTS8

2.1 Summary8

2.2 Antenna_Passive 3D_Passive_2400MHz-2500MHz.....8

2.3 3D Plots 15

2.4 PHOTOGRAPHS..... 25

2.5 Test Setup 31

1. TEST CONDITIONS

1.1 Power supply (V)

Power supply (V) under test:

N/A

1.2 Temperature (°C)

T_n = +22 to +28


The subscript n indicates normal test conditions.

1.3 Device orientation and Setup Requirements

The EUT has only one mechanical configuration and it was tested in the scenario required by the standard [1]:

- “Free-space” configuration, whereby the EUT has been placed directly on a support.

The EUT is rotated along two different spherical axes: theta (θ) and phi (Φ). The relationship between the 3D Cartesian coordinate system (X, Y, Z) and the theta and phi axes is illustrated in the following figure.

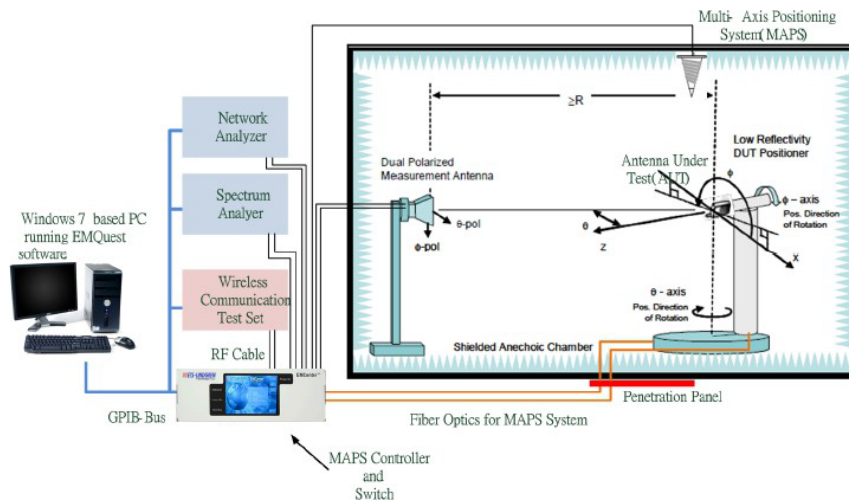

Theta is the spherical axis that rotates along the Cartesian Y axis while Phi is the spherical axis that rotates along the Cartesian Z axis. The initial measurement position (Theta = 0° and Phi = 0°) is illustrated in each of the test setup photographs. The EUT has only one mechanical configuration each and it was tested in the Free-space configuration, whereby the EUT has been placed directly on a support.

2. TEST RESULTS

2.1 Summary

2.2 Antenna_Passive

ANT003_Gain_2400MHz-5850MHz

Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-2.70	2.22	5.92	-2.70	53.70	2.22	-4.93	-6.63
2450	-2.38	2.15	5.52	-2.38	57.82	2.15	-4.51	-6.19
2500	-1.86	2.50	6.48	-1.86	65.14	2.50	-4.05	-5.83
5150	-5.34	1.85	5.96	-5.34	29.24	1.85	-7.09	-8.99
5500	-3.29	1.62	3.91	-3.29	46.86	1.62	-4.55	-6.06
5850	-1.70	2.50	4.37	-1.70	67.57	2.50	-3.17	-4.75

ANT010-DAU_Gain_2400MHz-5850MHz

Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-1.71	5.12	6.84	-1.71	67.43	5.12	-4.05	-5.67
2450	-1.40	5.20	7.02	-1.40	72.49	5.20	-3.57	-5.18
2500	-1.58	5.19	7.01	-1.58	69.47	5.19	-3.76	-5.35
5150	-2.25	5.50	8.75	-2.25	59.53	5.50	-3.64	-5.03
5500	-3.97	5.13	9.09	-3.97	40.11	5.13	-5.42	-6.88
5850	-3.45	4.46	7.92	-3.45	45.16	4.46	-4.84	-6.30

A5005N Gain 5150MHz-5850MHz

Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP ±Pi/4 (dBm)	NHPRP ±Pi/6 (dBm)
5150	-2.19	5.00	5.88	-2.19	60.35	5.00	-3.69	-5.46
5500	-3.07	3.92	5.19	-3.07	49.33	3.92	-4.34	-5.79
5850	-3.36	3.85	5.51	-3.36	46.11	3.85	-4.34	-5.59

A2405N Gain 2400MHz-2500MHz

Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-1.28	3.21	6.13	-1.28	74.56	3.21	-3.84	-5.74
2450	-1.19	3.82	6.77	-1.19	76.09	3.82	-3.62	-5.51
2500	-0.78	5.20	7.76	-0.78	83.54	5.20	-3.07	-4.95

A245005N Gain 2400MHz-5850MHz

Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-18.44	1.82	7.32	-18.44	1.43	1.82	-20.04	-21.47
2450	-14.56	2.51	6.43	-14.56	3.50	2.51	-16.07	-17.44
2500	-9.82	4.00	6.46	-9.82	10.41	4.00	-11.35	-12.82
5150	-5.58	5.10	4.64	-5.58	27.64	5.10	-6.27	-7.37
5500	-10.65	3.83	5.11	-10.65	8.62	3.83	-11.50	-12.76
5850	-9.91	3.78	4.42	-9.91	10.22	3.78	-10.94	-12.26

A245002 Gain_2400MHz-5850MHz


Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-1.45	2.00	3.89	-1.45	71.59	2.00	-2.23	-3.40
2450	-1.71	1.75	3.46	-1.71	67.50	1.75	-2.53	-3.70
2500	-1.23	1.95	3.44	-1.23	75.34	1.95	-2.10	-3.29
5150	-2.03	1.98	5.28	-2.03	62.69	1.98	-2.56	-3.42
5500	-1.66	2.00	6.56	-1.66	68.16	2.00	-2.41	-3.28
5850	-2.26	1.85	5.03	-2.26	59.43	1.85	-2.89	-3.64

A245004 Gain 2400MHz-5850MHz


Frequency (MHz)	Tot. Rad. Pwr. (dBm)	Peak EIRP (dBm)	Directivity (dBi)	Efficiency (dB)	Efficiency (%)	Gain (dBi)	NHPRP $\pm\pi/4$ (dBm)	NHPRP $\pm\pi/6$ (dBm)
2400	-0.75	4.00	6.40	-0.75	84.13	4.00	-1.05	-1.43
2450	-1.39	3.56	6.57	-1.39	72.66	3.56	-1.74	-2.12
2500	-1.35	3.21	6.41	-1.35	73.30	3.21	-1.76	-2.19
5150	-2.48	4.25	4.69	-2.48	56.53	4.25	-3.87	-4.76
5500	-1.76	5.10	5.87	-1.76	66.73	5.10	-2.53	-3.31
5850	-3.87	3.95	5.13	-3.87	40.99	3.95	-5.56	-6.87

2.3 3D Plots



ANT003 3D_Passive
ANT003



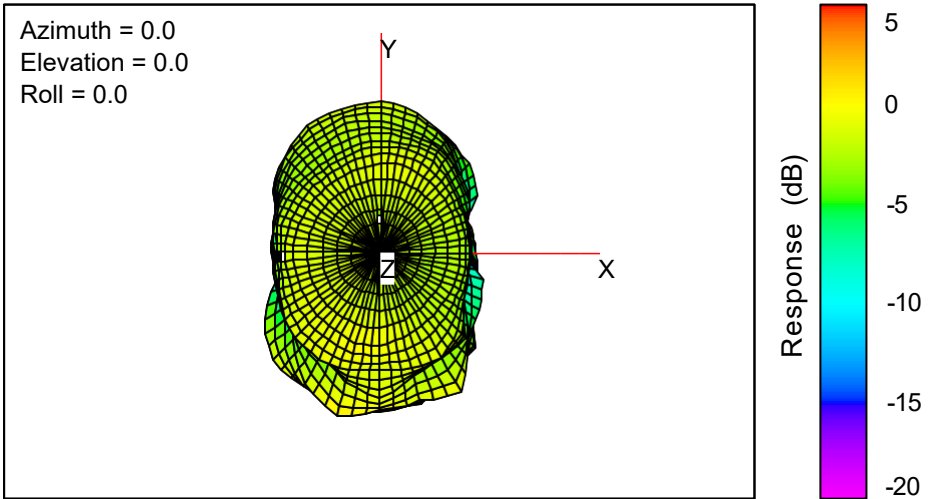


ANT003 2D_XY-Cut
ANT003_Cut XY

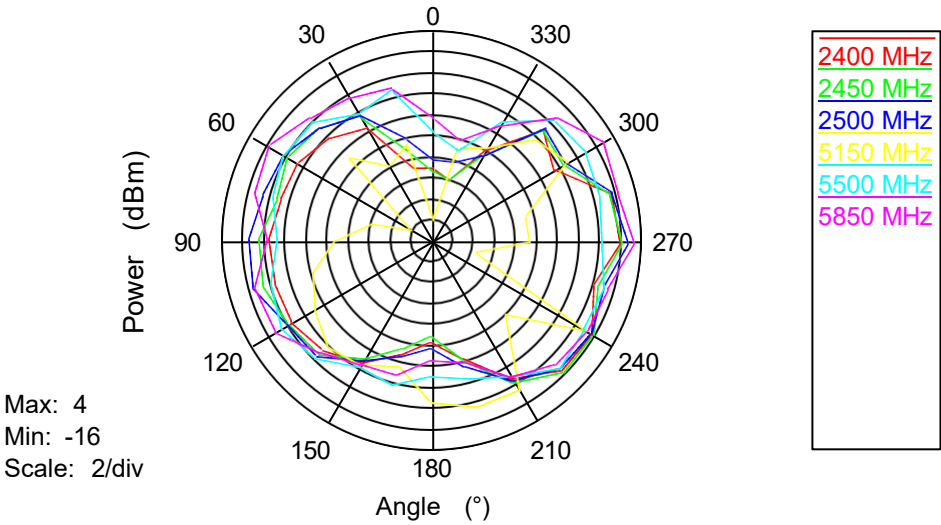


2530504R-A324340030S-A

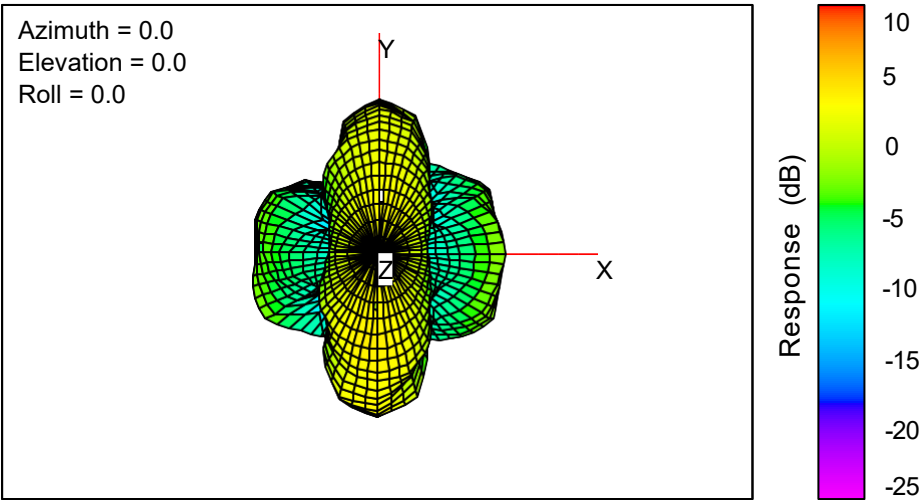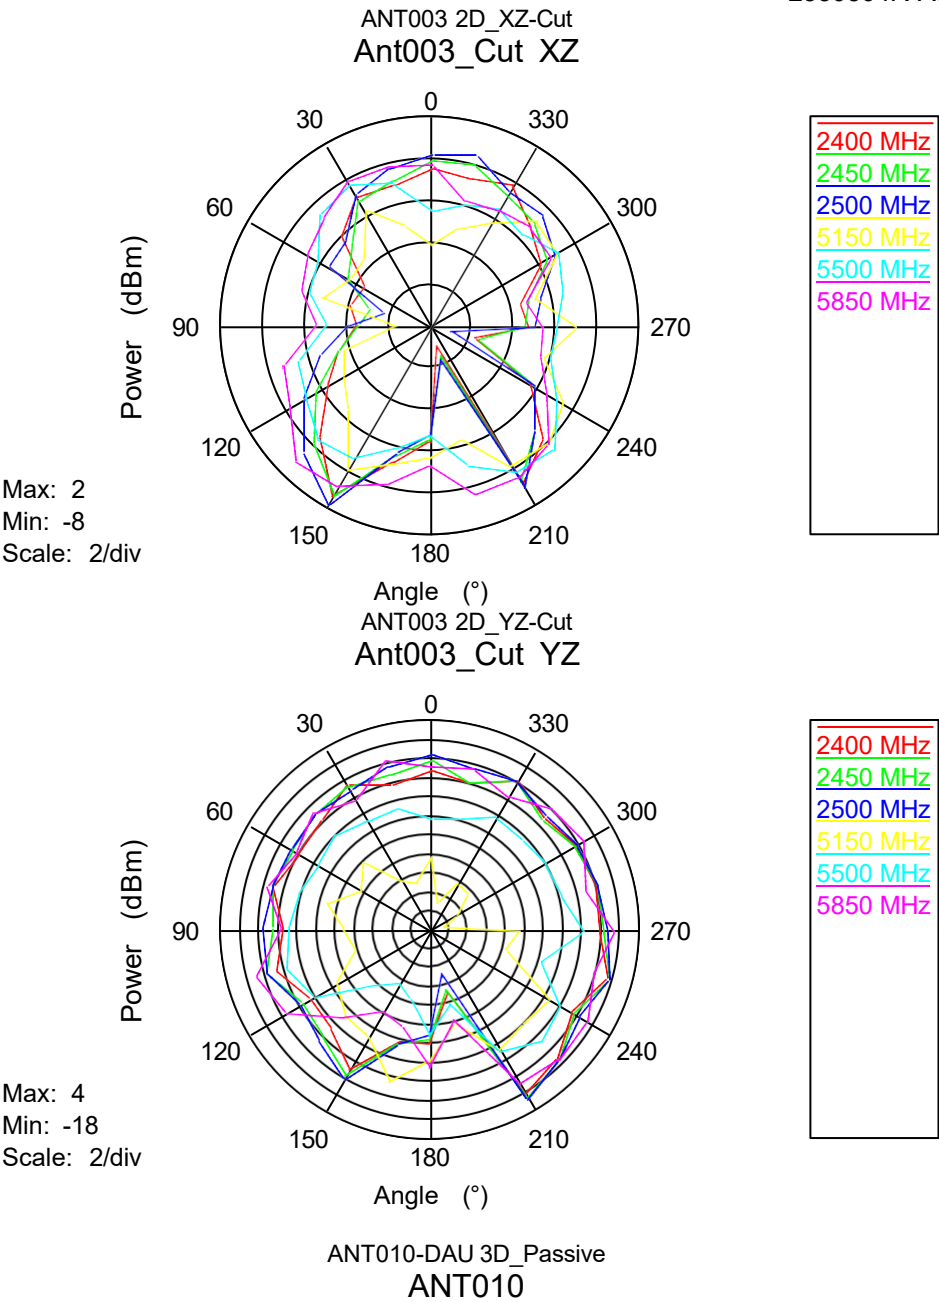


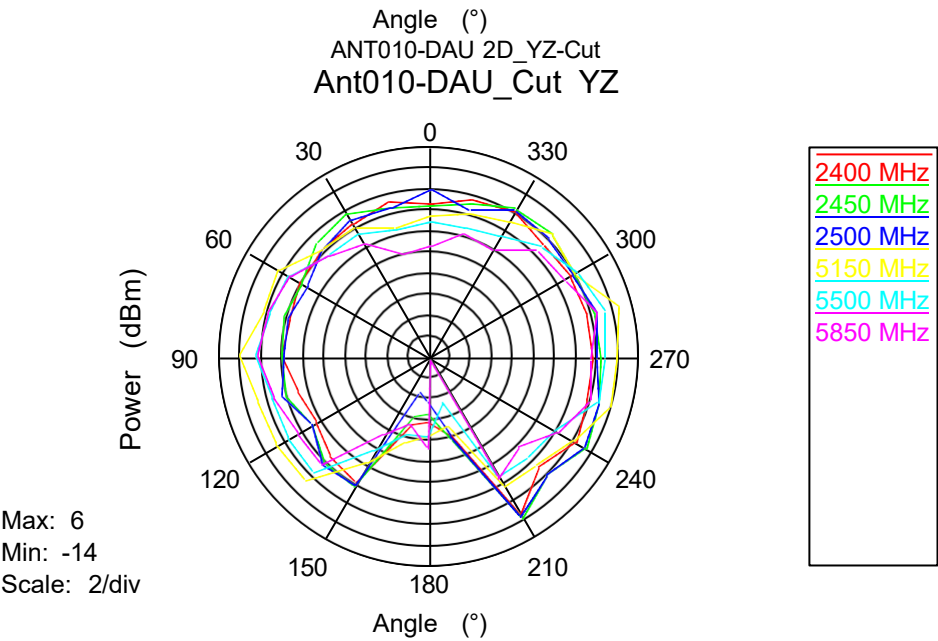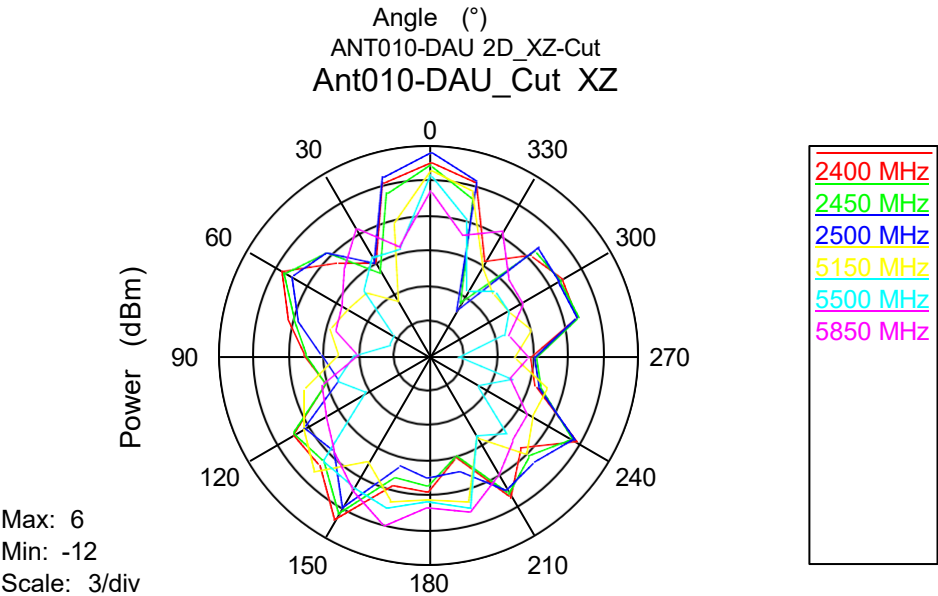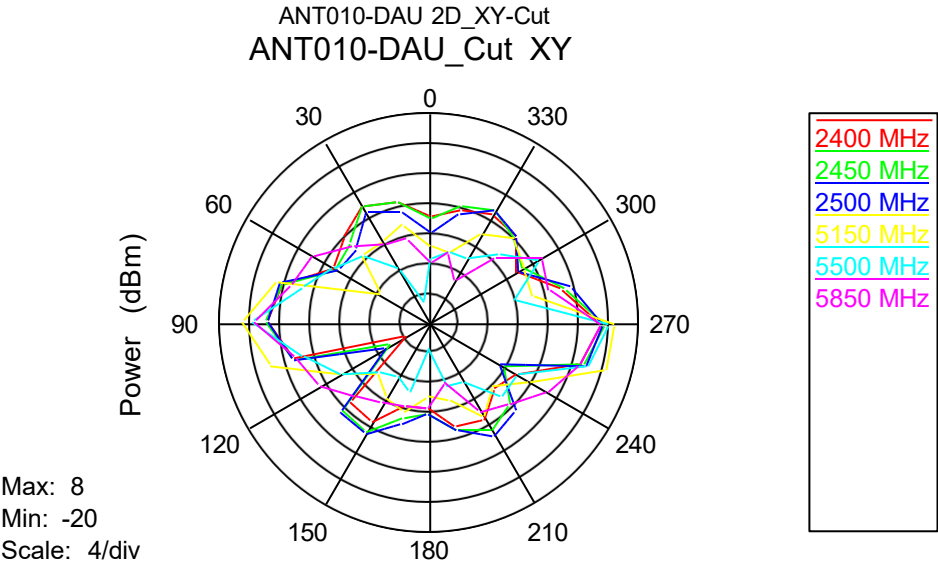


A5005N 3D_Passive
A5005N



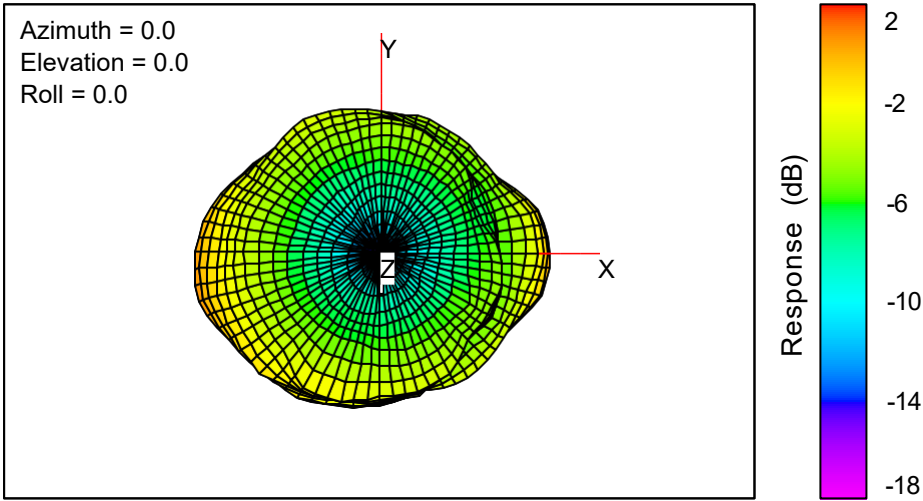





A5005N 2D_XY-Cut
A5005N_Cut XY



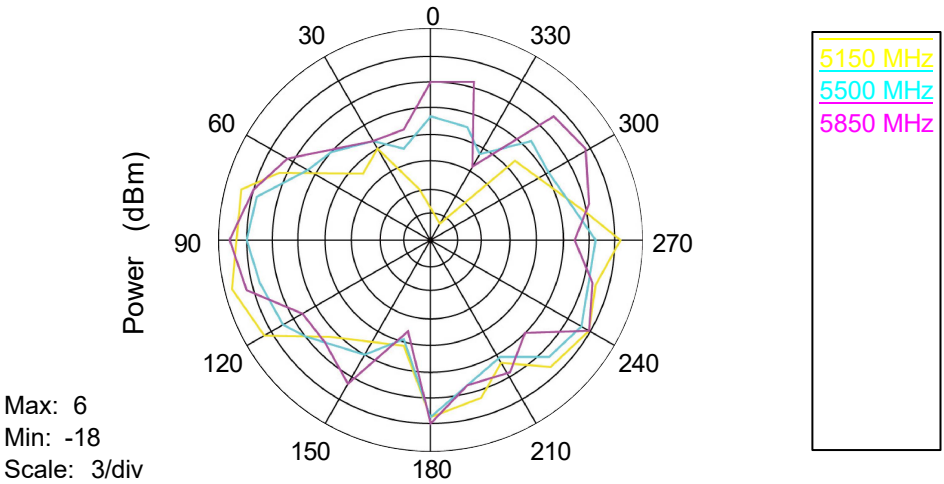


A5005N 2D_XZ-Cut
A5005N_Cut XZ

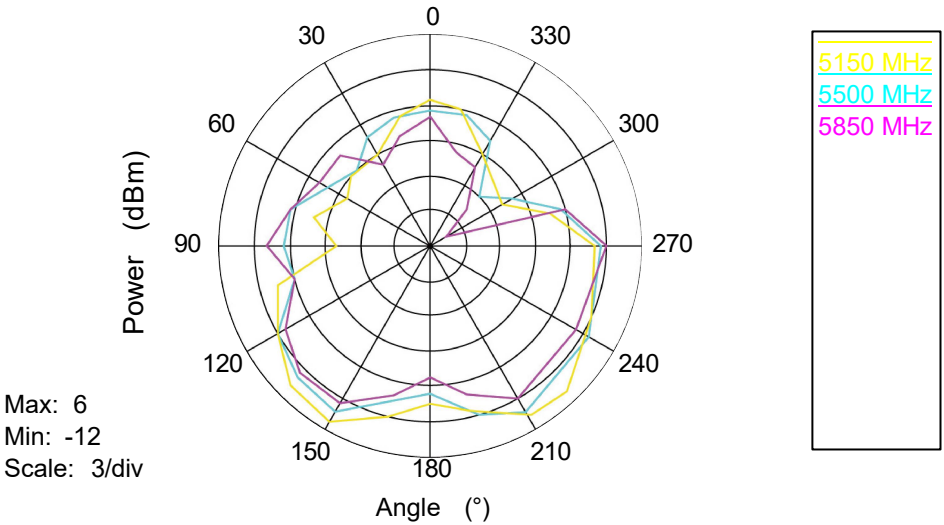


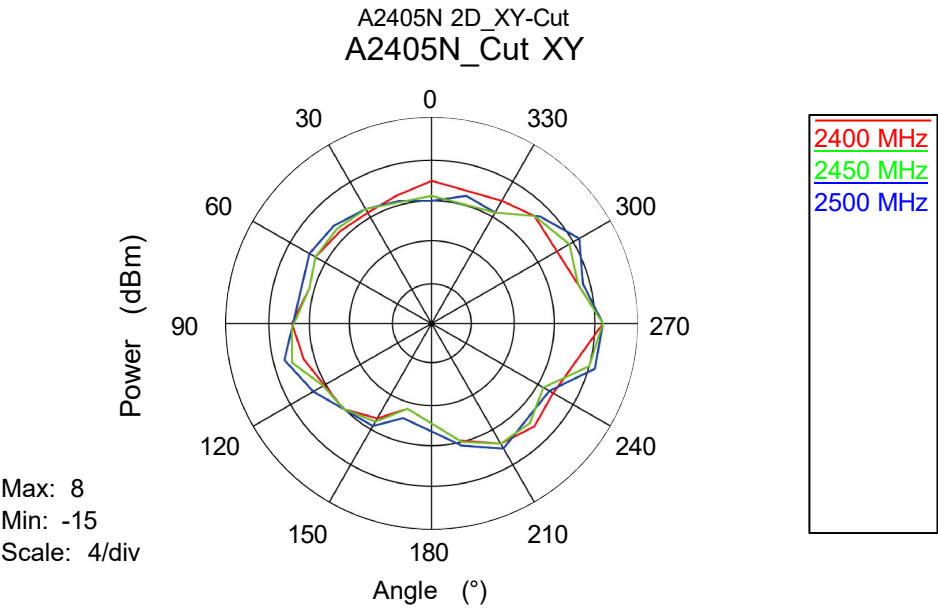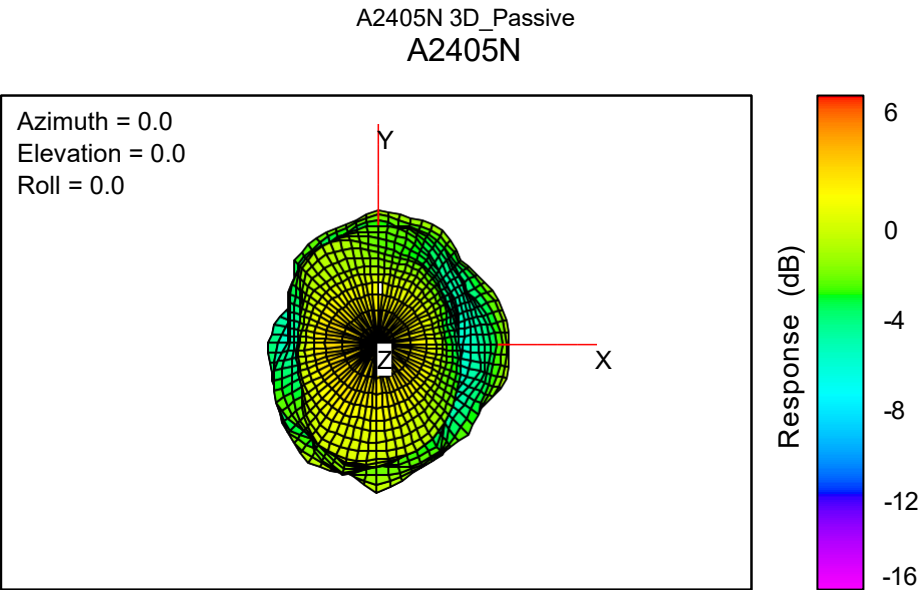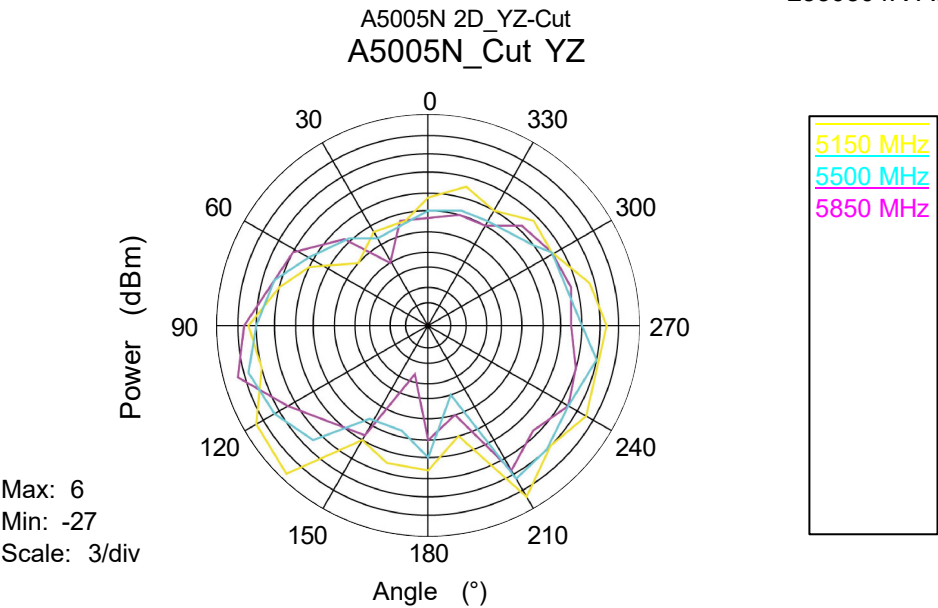

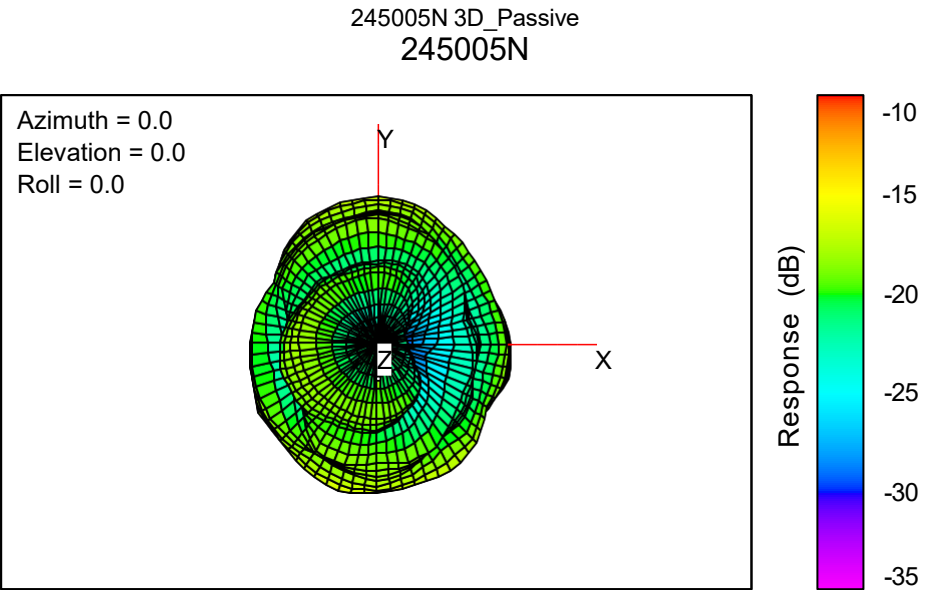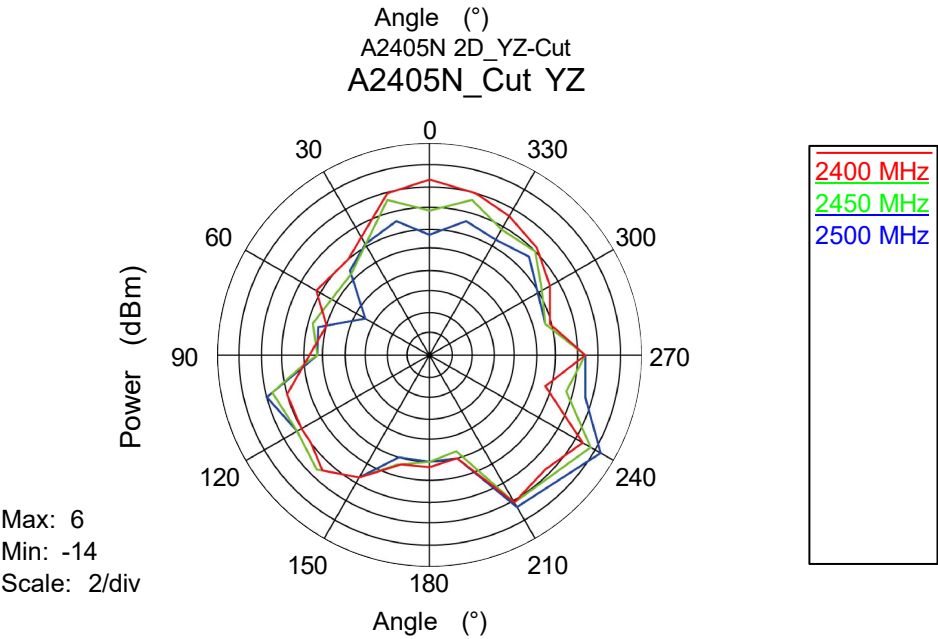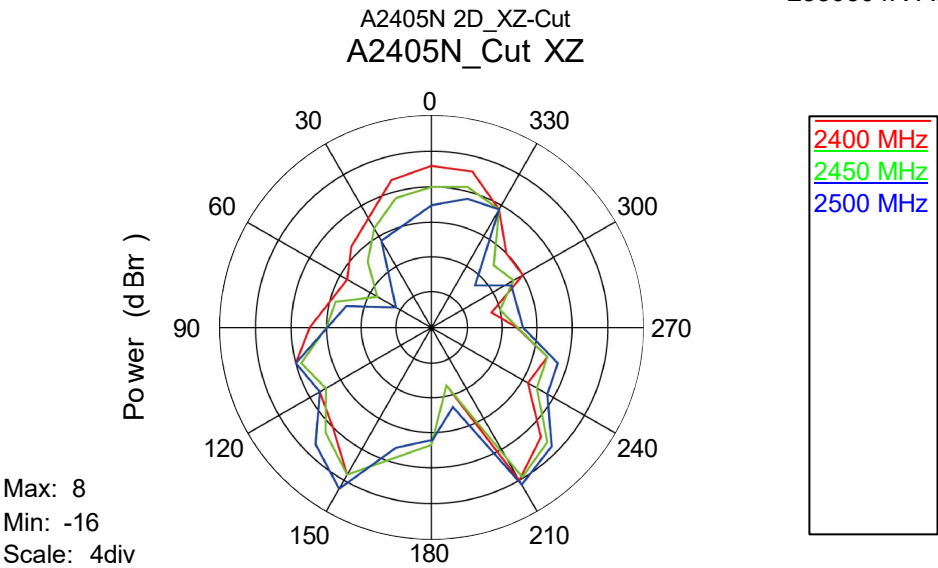


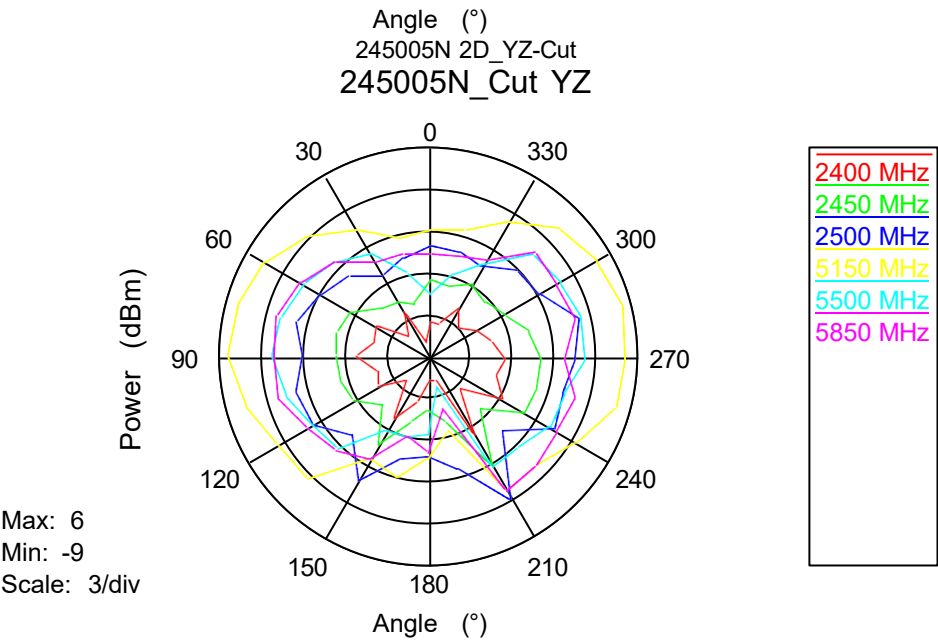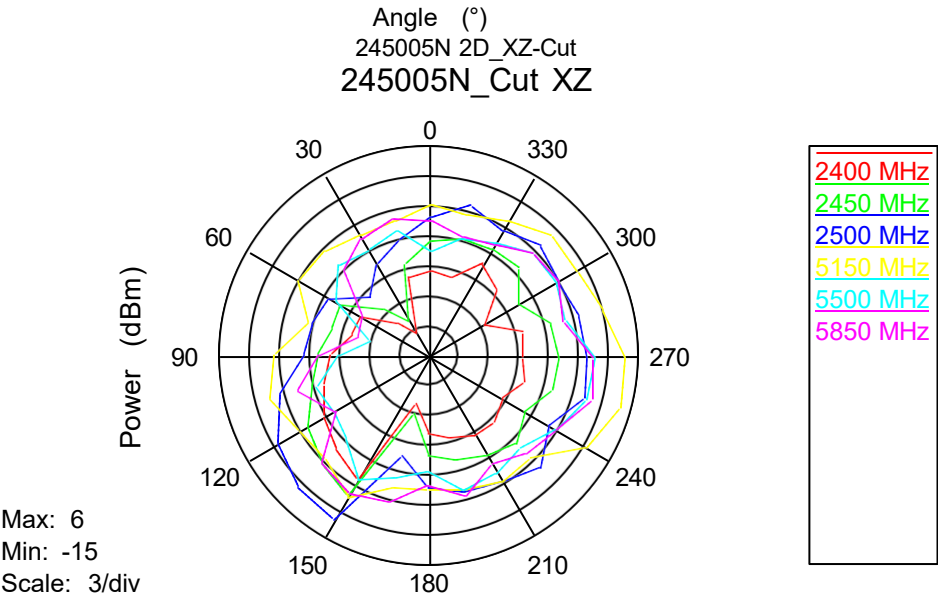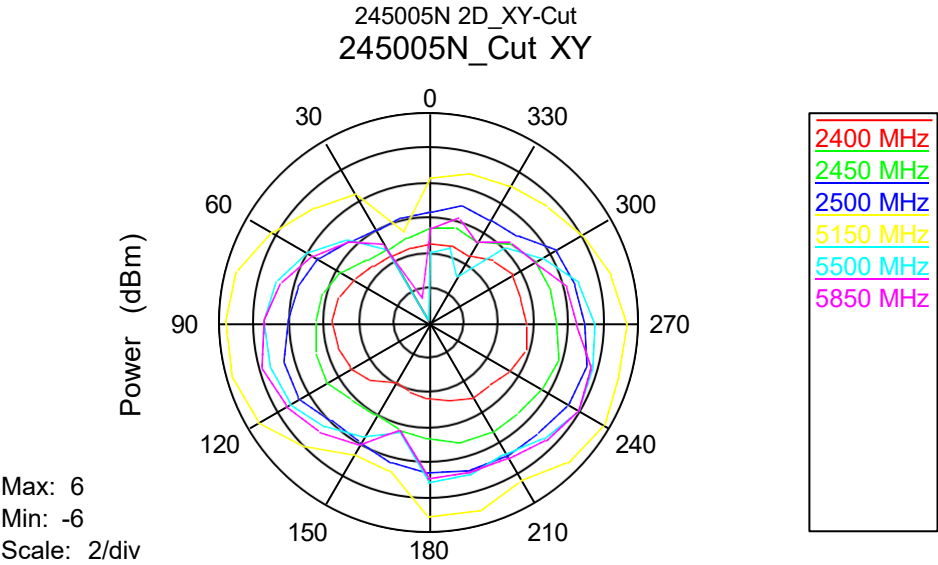

A245002 3D_Passive
A245002

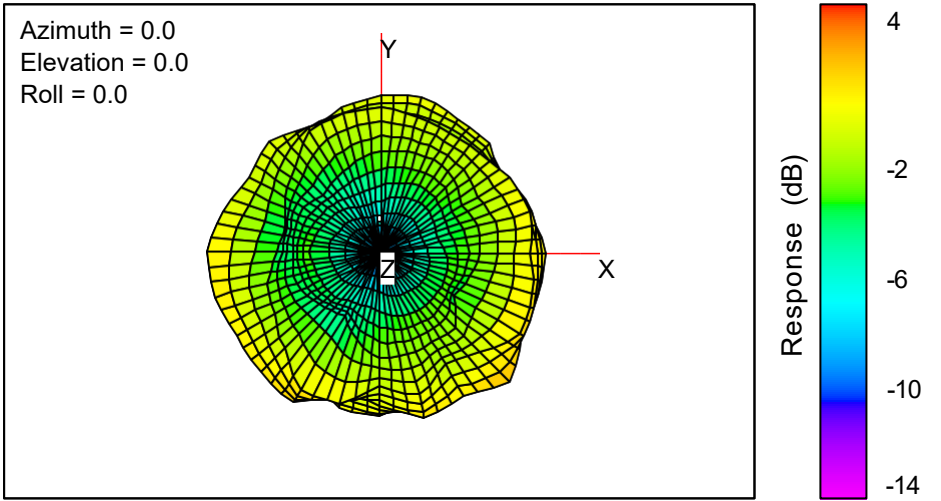

A245002 2D_XY-Cut
A245002_Cut XY

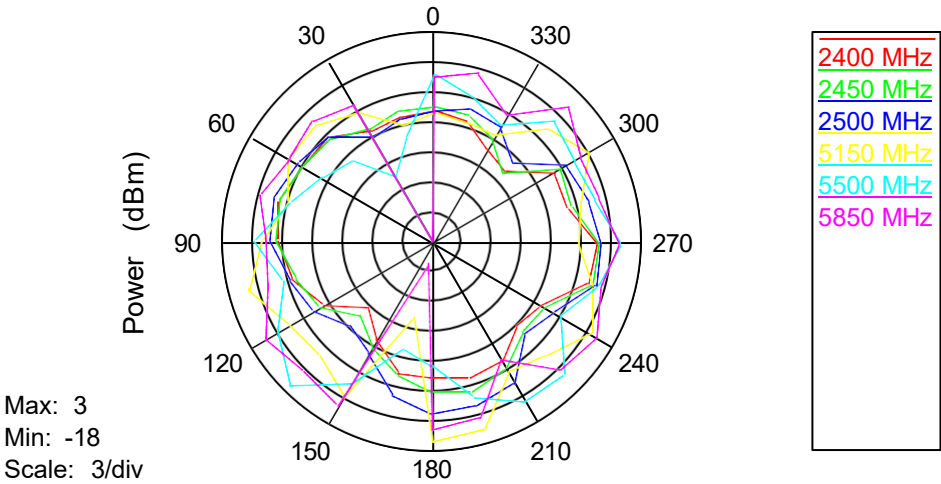

A245002 2D_XZ-Cut
A245002_Cut XZ

