


TX_be40_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2437MHz
Test by :Nova

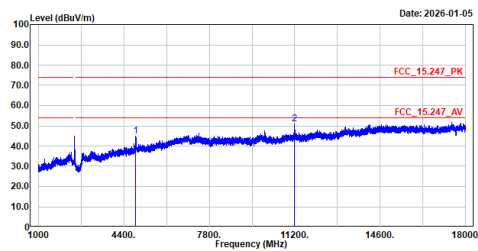


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	44.88	74.00	-29.12	56.12	-11.24	Peak
2	11190.970	51.02	74.00	-22.98	54.43	-3.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2437MHz
Test by :Nova

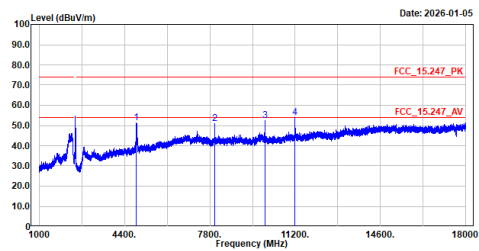


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	51.43	74.00	-22.57	62.67	-11.24	Peak
2	7993.375	50.00	74.00	-23.20	56.76	-5.96	Peak
3	9999.906	52.55	74.00	-21.45	57.85	-5.30	Peak
4	11193.630	53.79	74.00	-20.21	57.18	-3.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2452MHz
Test by :Nova

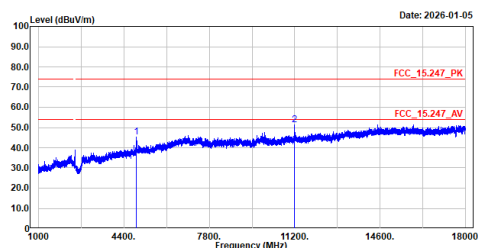


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	45.20	74.00	-28.80	56.15	-10.95	Peak
2	11189.910	51.23	74.00	-22.77	54.64	-3.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2452MHz
Test by :Nova

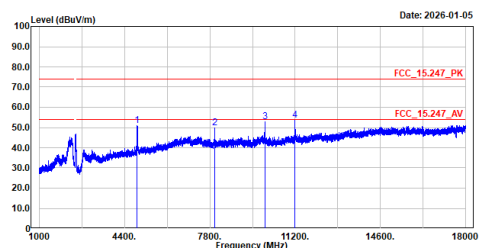


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	50.81	74.00	-23.19	61.76	-10.95	Peak
2	7991.781	49.72	74.00	-24.28	55.68	-5.96	Peak
3	10000.440	52.86	74.00	-21.14	58.16	-5.30	Peak
4	11189.910	53.61	74.00	-20.39	57.02	-3.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40_2437MHz_H_QP

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2437MHz
Test by :Nova

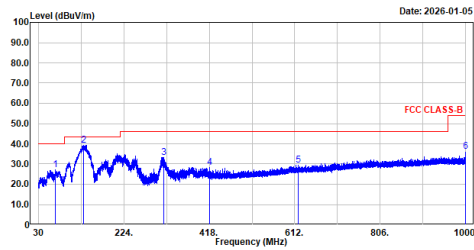


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	68.012	27.13	40.00	-12.87	39.30	-12.17	QP
2	131.547	39.33	43.50	-4.17	51.26	-11.93	QP
3	314.028	33.33	46.00	-12.67	43.00	-9.67	QP
4	419.425	28.19	46.00	-17.81	35.05	-6.86	QP
5	619.851	29.34	46.00	-16.66	32.34	-3.00	QP
6	1000.000	36.19	54.00	-17.81	35.09	1.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX be40_2437MHz_V_QP

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2437MHz
Test by :Nova

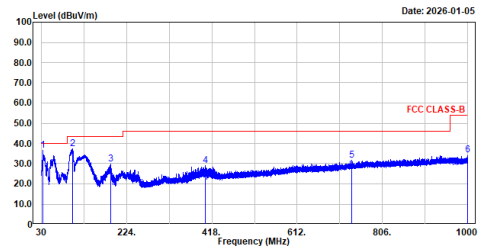


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	33.668	36.44	40.00	-3.56	47.34	-10.90	QP
2	100.962	37.44	43.50	-6.06	52.10	-14.66	QP
3	187.007	29.85	43.50	-13.65	42.99	-13.14	QP
4	402.238	28.90	46.00	-17.10	36.37	-7.47	QP
5	735.645	31.74	46.00	-14.26	32.96	-1.22	QP
6	1000.000	34.46	54.00	-19.54	33.36	1.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX b_2412MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

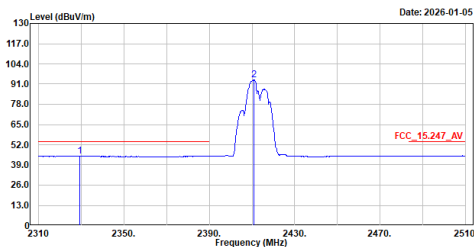


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2329.400	44.53	54.00	-9.47	14.12	30.41	Average
2	2410.800	93.63	-----	-----	63.34	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b_2412MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

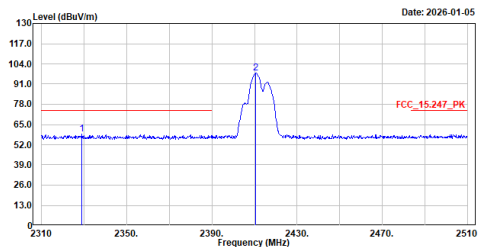


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2329.000	58.63	74.00	-15.37	28.22	30.41	Peak
2	2410.600	98.09	-----	-----	67.80	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Bob Chiu

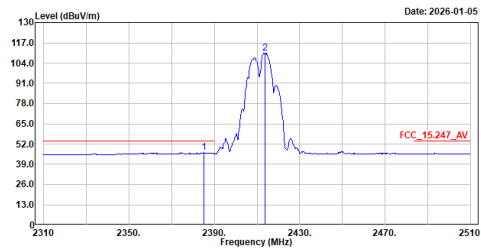


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.000	46.41	54.00	-7.59	16.04	30.37	Average
2	2413.800	110.34	54.00	56.34	80.04	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Bob Chiu

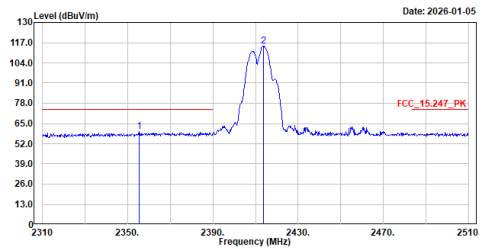


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2355.400	59.94	74.00	-14.06	29.60	30.34	Peak
2	2413.800	114.89	74.00	40.89	84.59	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

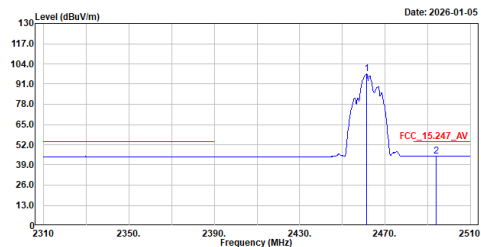


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.400	97.82	54.00	43.82	67.58	30.24	Average
2	2494.000	44.72	54.00	-9.28	14.35	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

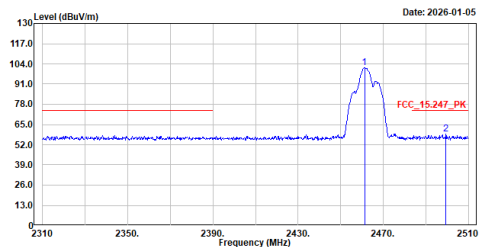


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	101.46	54.00	47.46	71.22	30.24	Peak
2	2499.400	58.67	74.00	-15.33	28.30	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2462MHz_V Average

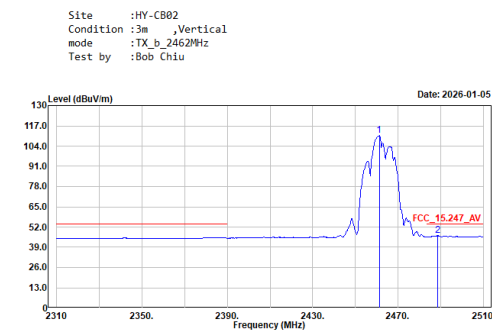

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	110.74	-----	-----	80.50	30.24	Average
2	2488.600	46.57	54.00	-7.43	16.21	30.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2462MHz_V Peak

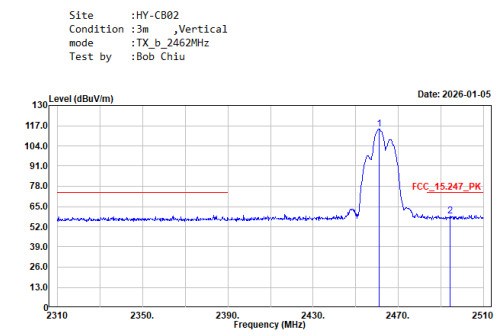

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.000	114.85	-----	-----	84.61	30.24	Peak
2	2494.400	59.01	74.00	-14.99	28.64	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2412MHz_H Average

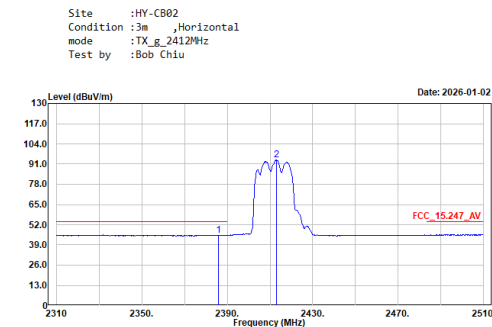

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.000	45.26	54.00	-8.74	14.89	30.37	Average
2	2413.000	93.74	-----	-----	63.44	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2412MHz_H Peak

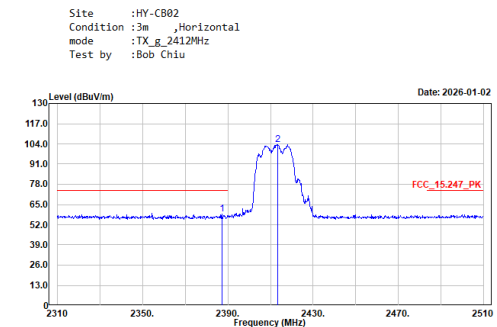

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2387.200	58.90	74.00	-15.10	28.53	30.37	Peak
2	2413.400	103.35	-----	-----	73.05	30.30	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

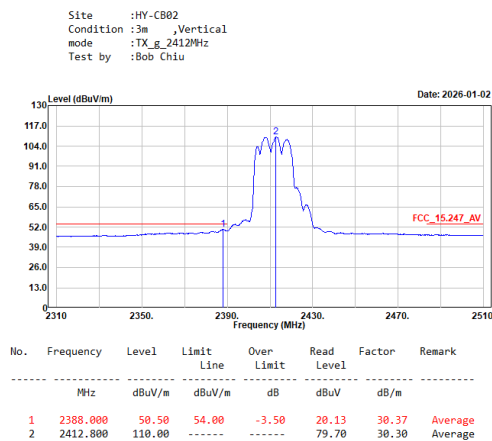


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

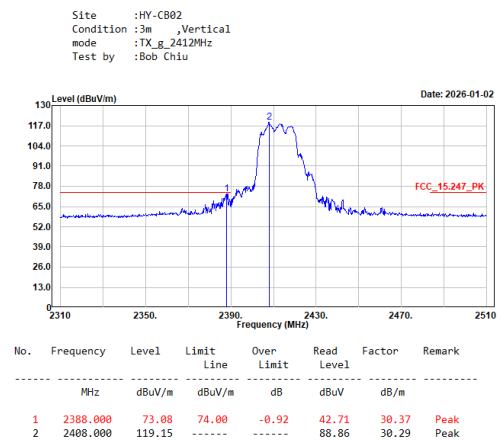


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

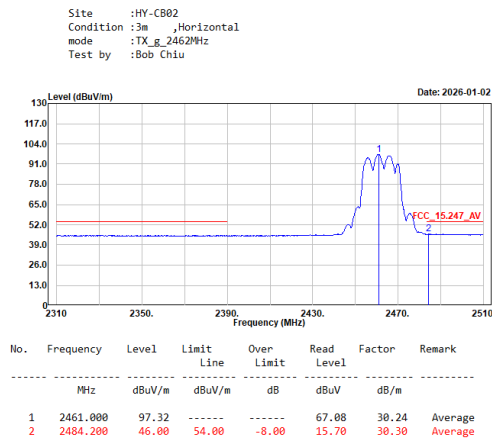


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

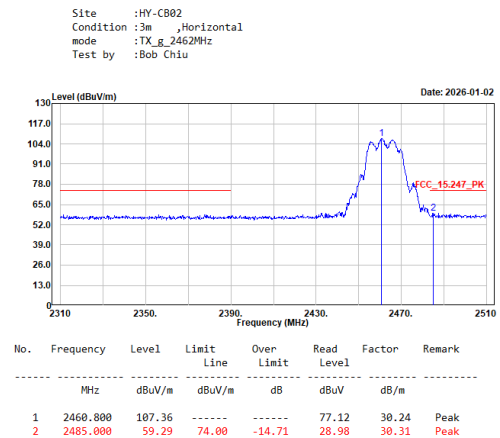

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2462MHz_V Average

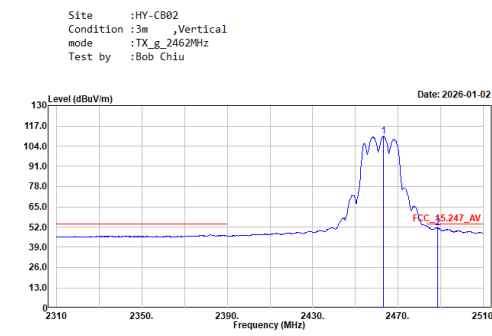

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.200	110.21	-----	-----	79.97	30.24	Average
2	2488.600	51.41	54.00	-2.59	21.05	30.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2462MHz_V Peak

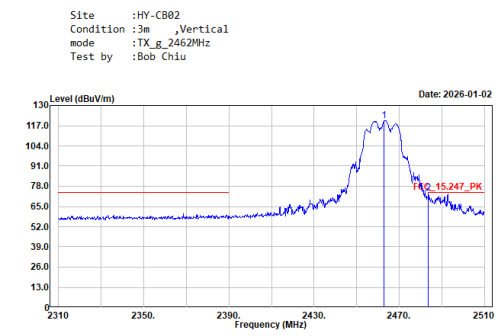

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	120.24	-----	-----	90.00	30.24	Peak
2	2483.600	73.43	74.00	-0.57	43.13	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n20 2412MHz_H Average

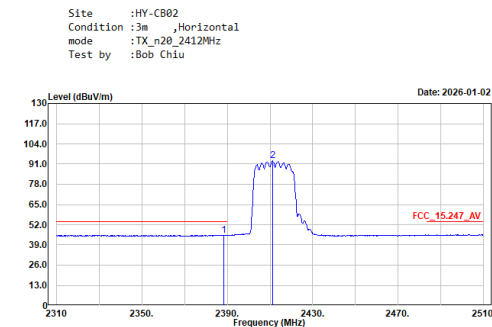

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	45.35	54.00	-8.65	14.98	30.37	Average
2	2411.200	93.16	-----	-----	62.87	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20 2412MHz_H Peak

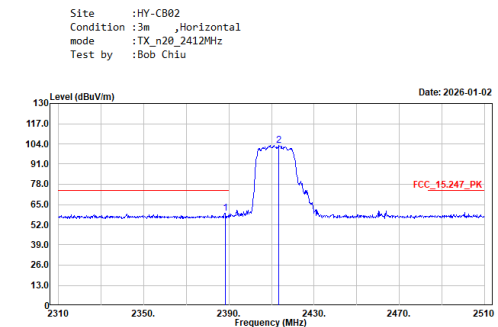


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.200	59.27	74.00	-14.73	28.90	30.37	Peak
2	2413.400	103.19	-----	-----	72.89	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Bob Chiu

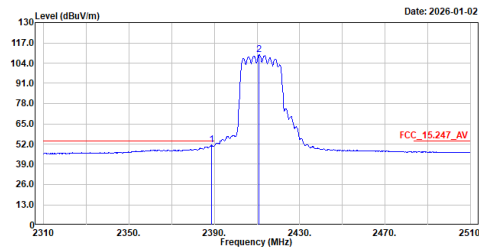


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.600	51.38	54.00	-2.62	21.01	30.37	Average
2	2411.000	109.39	54.00	55.39	79.10	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Bob Chiu

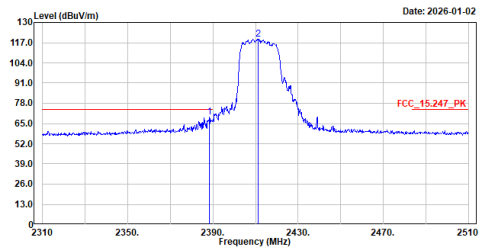


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	69.41	74.00	-4.59	39.04	30.37	Peak
2	2411.400	119.35	74.00	45.35	89.06	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Bob Chiu

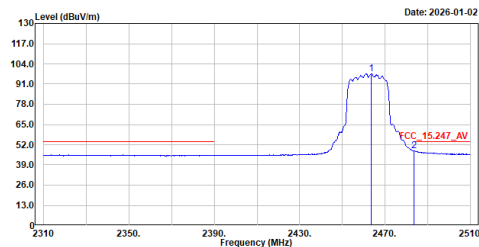


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.600	97.79	54.00	43.79	67.54	30.25	Average
2	2483.600	48.06	54.00	-5.94	17.76	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Bob Chiu

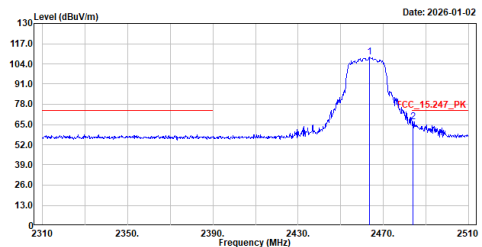


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.400	108.57	74.00	34.57	78.32	30.25	Peak
2	2484.000	66.65	74.00	-7.35	36.35	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Bob Chiu

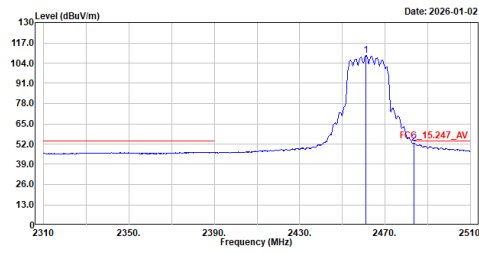


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	108.82	-----	-----	78.58	30.24	Average
2	2483.600	52.60	54.00	-1.40	22.30	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Bob Chiu

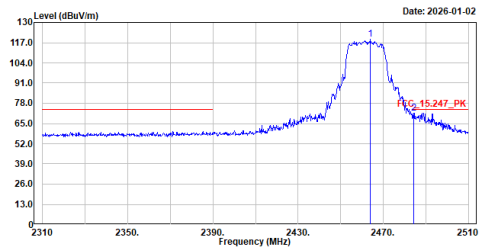


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.000	119.00	-----	-----	88.75	30.25	Peak
2	2484.200	71.67	74.00	-2.33	41.37	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Bob Chiu

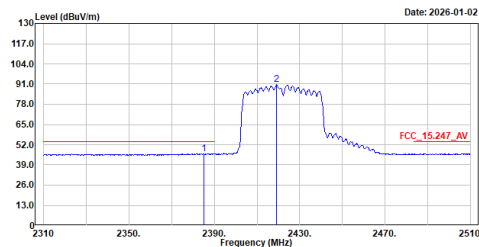


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.000	46.23	54.00	-7.77	15.86	30.37	Average
2	2419.200	90.64	-----	-----	60.34	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Bob Chiu

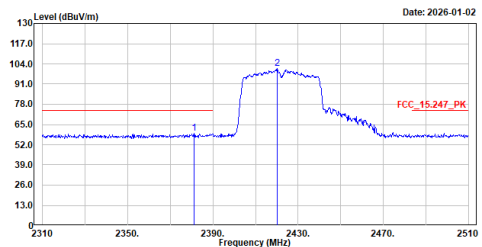


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2381.200	59.44	74.00	-14.56	29.08	30.36	Peak
2	2420.200	100.86	-----	-----	70.56	30.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Bob Chiu

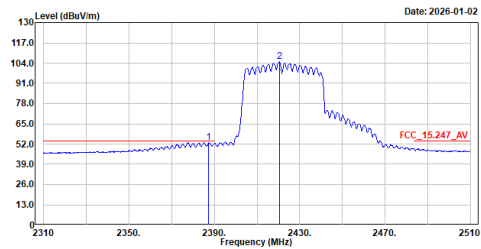


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2387.400	52.93	54.00	-1.07	22.56	30.37	Average
2	2420.400	104.76	-----	-----	74.46	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Bob Chiu

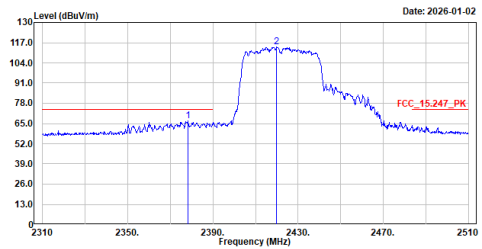


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2378.200	66.62	74.00	-7.38	36.28	30.34	Peak
2	2420.000	114.51	-----	-----	84.21	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

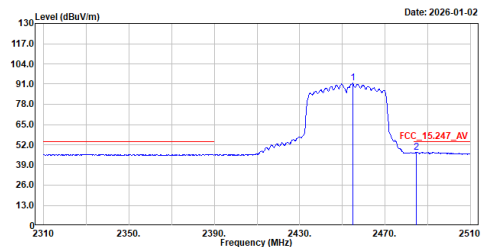


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2454.800	91.51	-----	-----	61.27	30.24	Average
2	2484.800	47.14	54.00	-6.86	16.83	30.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Peak


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

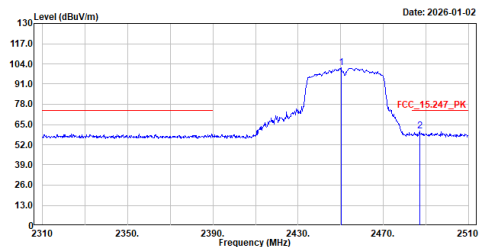

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2450.200	101.36	-----	-----	71.13	30.23	Peak
2	2487.000	60.63	74.00	-13.37	30.30	30.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n40_2452MHz_V_Average

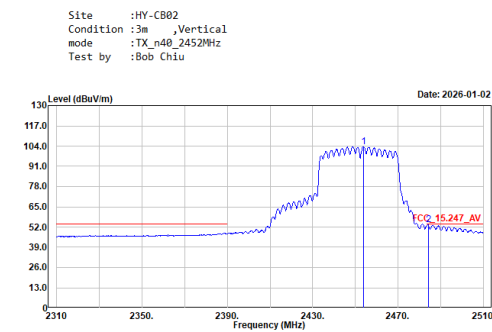

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	103.73	-----	-----	73.49	30.24	Average
2	2484.200	53.39	54.00	-0.61	23.09	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n40_2452MHz_V_Peak

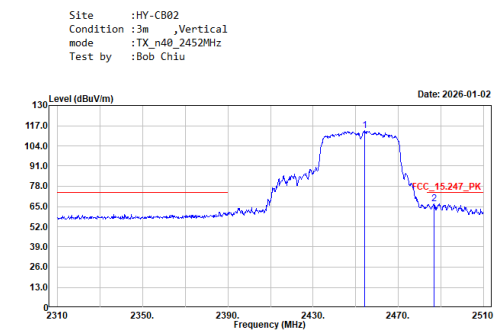

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.200	113.85	-----	-----	83.61	30.24	Peak
2	2486.800	66.60	74.00	-7.40	36.27	30.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2412MHz_H_Average

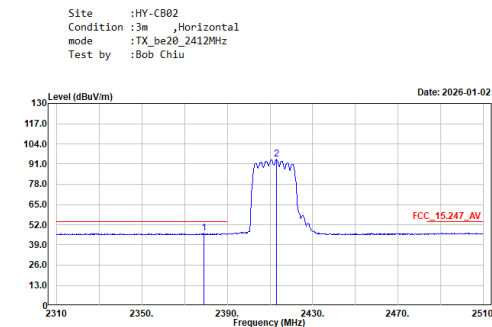

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2379.200	46.37	54.00	-7.63	16.17	30.20	Average
2	2413.000	94.05	-----	-----	63.92	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2412MHz_H_Peak

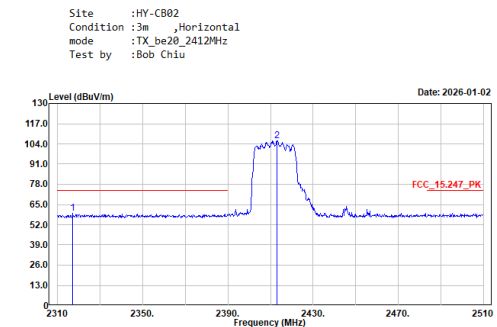

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2317.200	59.55	74.00	-14.45	29.24	30.31	Peak
2	2413.200	105.99	-----	-----	75.69	30.30	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Average

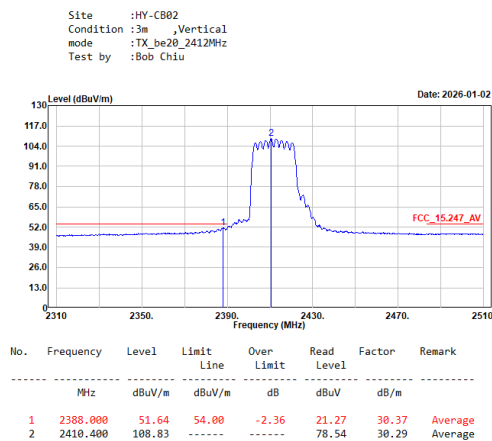


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Peak

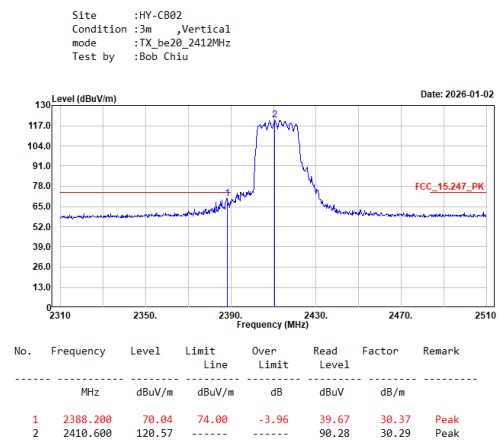


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz H Average

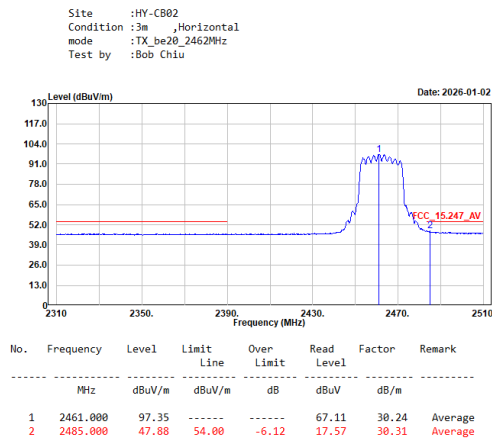

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX be20 2462MHz H Peak

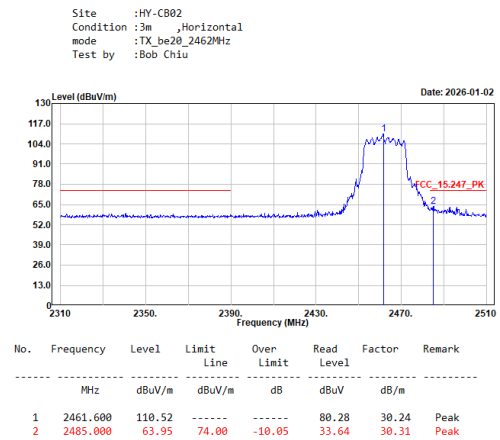

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

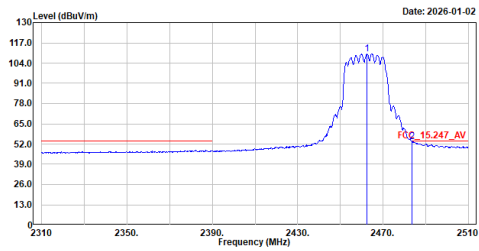


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.600	110.03	-----	-----	79.79	30.24	Average
2	2483.600	53.46	54.00	-0.54	23.16	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

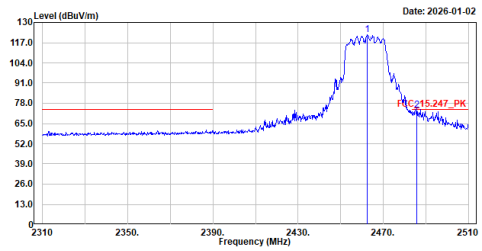


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.600	121.99	-----	-----	91.75	30.24	Peak
2	2485.800	73.49	74.00	-0.51	43.17	30.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

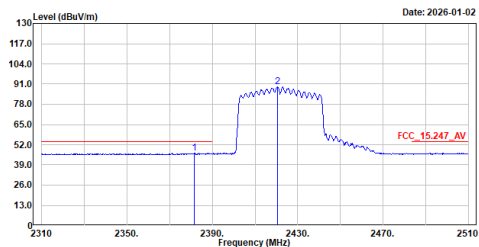


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2381.600	46.47	54.00	-7.53	16.11	30.36	Average
2	2420.600	89.20	-----	-----	58.90	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

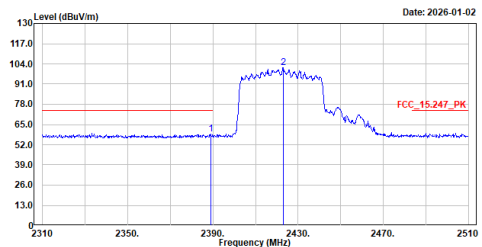


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.000	59.02	74.00	-14.98	28.65	30.37	Peak
2	2423.000	101.74	-----	-----	71.43	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu

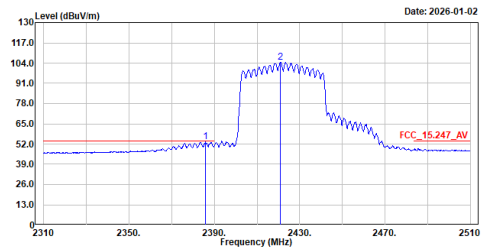


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.000	53.25	54.00	-0.75	22.88	30.37	Average
2	2421.000	104.54	-----	-----	74.24	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.600	67.35	74.00	-6.65	36.98	30.37	Peak
2	2426.000	116.32	-----	-----	86.01	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

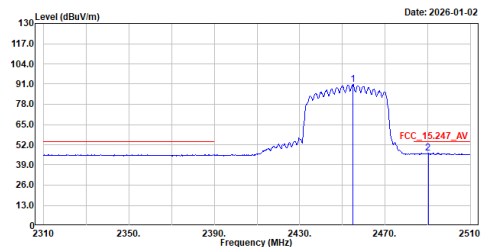


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.800	90.73	-----	-----	60.49	30.24	Average
2	2490.200	46.55	54.00	-7.45	16.18	30.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

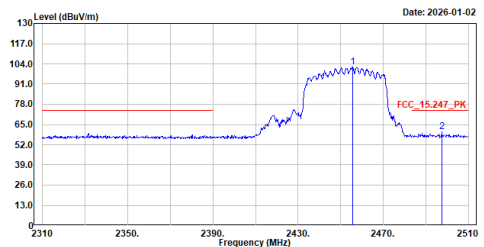


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2455.600	102.02	-----	-----	71.78	30.24	Peak
2	2497.400	60.41	74.00	-13.59	30.04	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.000	102.78	-----	-----	72.55	30.23	Average
2	2485.000	53.45	54.00	-0.55	23.14	30.31	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu

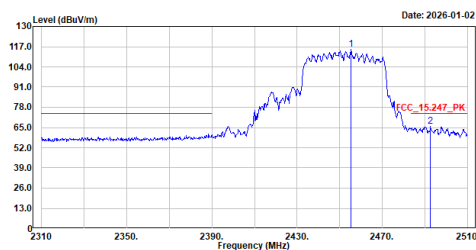


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2455.400	115.08	-----	-----	84.84	30.24	Peak
2	2492.600	65.76	74.00	-8.24	35.39	30.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2437MHz
Test by :Bob Chiu




TX_be40_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2437MHz
Test by :Bob Chiu



M/N: AW7990-AED, Antenna: PCB**TX b 2412MHz H**

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Caster

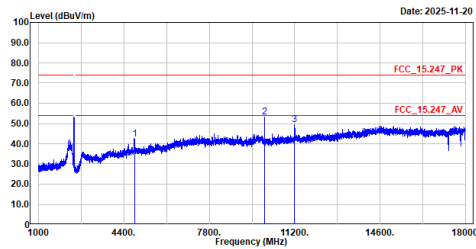


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	42.43	74.00	-31.57	54.06	-11.63	Peak
2	9999.800	53.21	74.00	-20.79	58.51	-5.30	Peak
3	11196.600	49.42	74.00	-24.58	52.79	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	53.47	54.00	-0.53	65.10	-11.63	Average
2	4824.000	54.86	74.00	-19.14	66.49	-11.63	Peak
3	9999.800	46.07	74.00	-27.93	51.37	-5.30	Peak
4	11196.300	51.42	74.00	-22.58	54.78	-3.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2437MHz
Test by :Caster

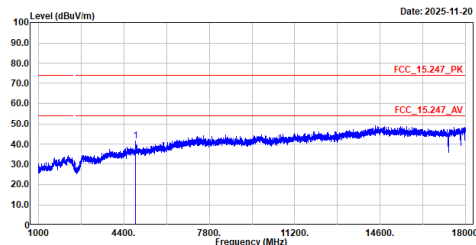


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	41.53	74.00	-32.47	52.77	-11.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2437MHz
Test by :Caster

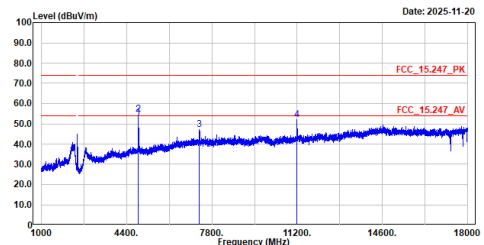


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	53.24	54.00	-0.76	64.48	-11.24	Average
2	4874.000	54.81	74.00	-19.19	66.05	-11.24	Peak
3	7308.700	47.07	74.00	-26.93	51.75	-4.68	Peak
4	11191.500	51.89	74.00	-22.11	55.30	-3.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_H

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	40.36	74.00	-33.64	51.22	-10.86	Peak
2	7386.000	46.46	74.00	-27.54	51.01	-4.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	53.45	54.00	-0.55	64.31	-10.86	Average
2	4924.000	54.33	74.00	-19.67	65.19	-10.86	Peak
3	7386.000	51.57	74.00	-22.43	56.12	-4.55	Peak
4	9999.800	44.82	74.00	-29.18	50.12	-5.30	Peak
5	11189.800	52.13	74.00	-21.87	55.54	-3.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Caster

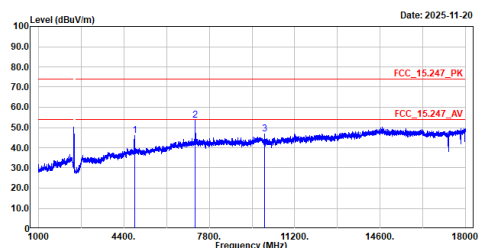


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	46.13	74.00	-27.87	57.76	-11.63	Peak
2	7236.000	53.44	74.00	-20.56	58.22	-4.78	Peak
3	9999.800	46.98	74.00	-27.02	52.28	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

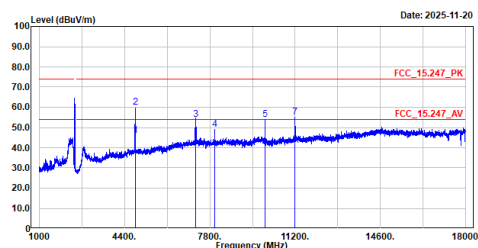


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	46.02	54.00	-7.98	57.65	-11.63	Average
2	4824.000	60.14	74.00	-13.86	71.77	-11.63	Peak
3	7236.000	53.82	74.00	-20.18	58.62	-4.80	Peak
4	7992.100	48.90	74.00	-25.10	54.86	-5.96	Peak
5	9999.800	53.86	74.00	-20.14	59.16	-5.30	Peak
6	11194.900	41.63	54.00	-12.37	45.02	-3.39	Average
7	11194.900	55.17	74.00	-18.83	58.56	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	50.60	74.00	-23.40	61.79	-11.19	Peak
2	7311.000	50.16	54.00	-3.84	54.84	-4.68	Average
3	7311.000	65.38	74.00	-8.62	70.06	-4.68	Peak
4	9999.800	47.19	74.00	-26.81	52.49	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	46.73	54.00	-7.27	57.97	-11.24	Average
2	4874.000	60.37	74.00	-13.63	71.65	-11.28	Peak
3	7311.000	51.50	54.00	-2.50	56.18	-4.68	Average
4	7311.000	67.16	74.00	-6.84	71.84	-4.68	Peak
5	7995.500	49.42	74.00	-24.58	55.39	-5.97	Peak
6	9999.800	53.86	74.00	-20.14	59.16	-5.30	Peak
7	11194.900	43.11	54.00	-10.89	46.50	-3.39	Average
8	11194.900	54.87	74.00	-19.13	58.26	-3.39	Peak
9	12185.000	49.68	74.00	-24.32	51.34	-1.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	47.21	74.00	-26.79	58.07	-10.86	Peak
2	7386.000	48.65	54.00	-5.35	53.20	-4.55	Average
3	7386.000	61.61	74.00	-12.39	66.16	-4.55	Peak
4	9999.800	46.90	74.00	-27.10	52.20	-5.30	Peak
5	11193.200	48.41	74.00	-25.59	51.80	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	45.73	54.00	-8.27	56.59	-10.86	Average
2	4924.000	58.99	74.00	-15.01	69.85	-10.86	Peak
3	7386.000	49.59	54.00	-4.41	54.14	-4.55	Average
4	7386.000	66.90	74.00	-7.10	71.46	-4.56	Peak
5	7993.800	49.82	74.00	-24.18	55.79	-5.97	Peak
6	9999.800	53.93	74.00	-20.07	59.23	-5.30	Peak
7	11191.500	41.10	54.00	-12.90	44.51	-3.41	Average
8	11191.500	55.04	74.00	-18.96	58.45	-3.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	44.37	74.00	-29.63	56.00	-11.63	Peak
2	7236.000	48.12	74.00	-25.88	52.93	-4.81	Peak
3	9999.800	46.79	74.00	-27.21	52.09	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2412MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	52.80	74.00	-21.20	64.43	-11.63	Peak
2	7236.000	52.81	74.00	-21.19	57.60	-4.79	Peak
3	7997.200	49.29	74.00	-24.71	55.25	-5.96	Peak
4	9999.800	53.79	74.00	-20.21	59.09	-5.30	Peak
5	11189.800	53.31	74.00	-20.69	56.72	-3.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	47.40	74.00	-26.60	58.61	-11.21	Peak
2	7311.000	44.73	54.00	-9.27	49.41	-4.68	Average
3	7311.000	59.91	74.00	-14.09	64.58	-4.67	Peak
4	9999.800	47.61	74.00	-26.39	52.91	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	44.21	54.00	-9.79	55.45	-11.24	Average
2	4874.000	57.70	74.00	-16.30	68.96	-11.26	Peak
3	7311.000	46.66	54.00	-7.34	51.34	-4.68	Average
4	7311.000	63.42	74.00	-10.58	68.10	-4.68	Peak
5	7993.800	49.86	74.00	-24.14	55.83	-5.97	Peak
6	9999.800	53.84	74.00	-20.16	59.14	-5.30	Peak
7	11193.200	42.93	54.00	-11.07	46.32	-3.39	Average
8	11193.200	55.06	74.00	-18.94	58.45	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

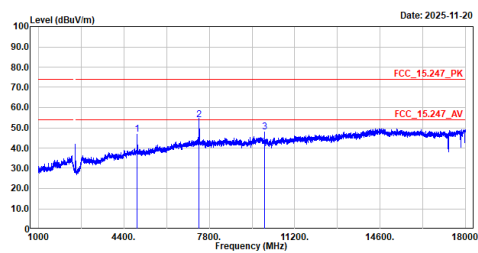


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	46.64	74.00	-27.36	57.51	-10.87	Peak
2	7386.000	53.86	74.00	-20.14	58.42	-4.56	Peak
3	9999.800	47.91	74.00	-26.09	53.21	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2462MHz
Test by :Caster

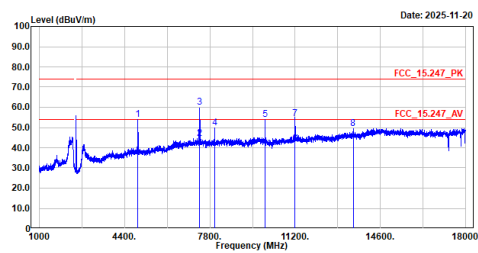


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	53.96	74.00	-20.04	64.83	-10.87	Peak
2	7386.000	44.50	54.00	-9.50	49.05	-4.55	Average
3	7386.000	60.05	74.00	-13.95	64.60	-4.55	Peak
4	7993.800	49.81	74.00	-24.19	55.78	-5.97	Peak
5	9999.800	53.95	74.00	-20.05	59.25	-5.30	Peak
6	11196.600	41.84	54.00	-12.16	45.21	-3.37	Average
7	11196.600	54.17	74.00	-19.83	57.54	-3.37	Peak
8	13517.100	49.27	74.00	-24.73	49.35	-0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2422MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	41.08	74.00	-32.92	52.59	-11.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2422MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	47.54	74.00	-26.46	59.05	-11.51	Peak
2	7995.500	50.50	74.00	-23.50	56.47	-5.97	Peak
3	9999.800	53.53	74.00	-20.47	58.83	-5.30	Peak
4	11194.900	53.21	74.00	-20.79	56.60	-3.39	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2437MHz_H

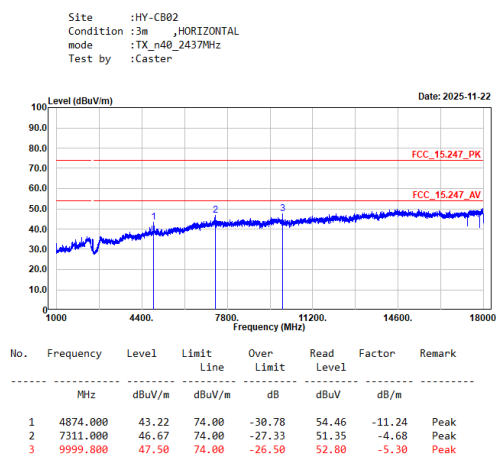


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2437MHz_V

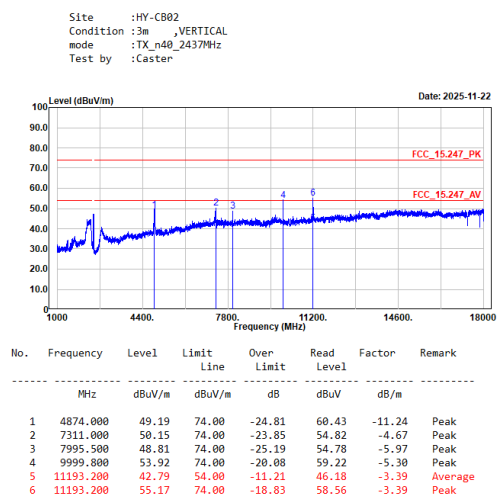


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H

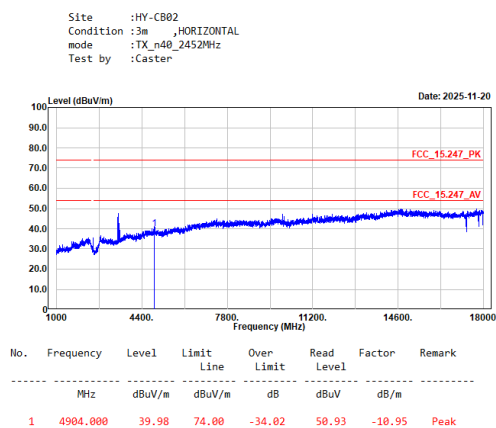


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V

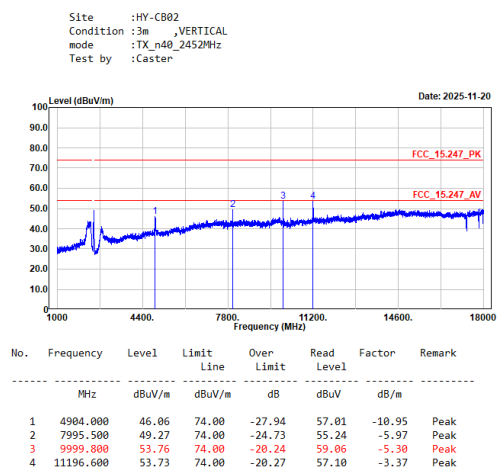


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2412MHz_H

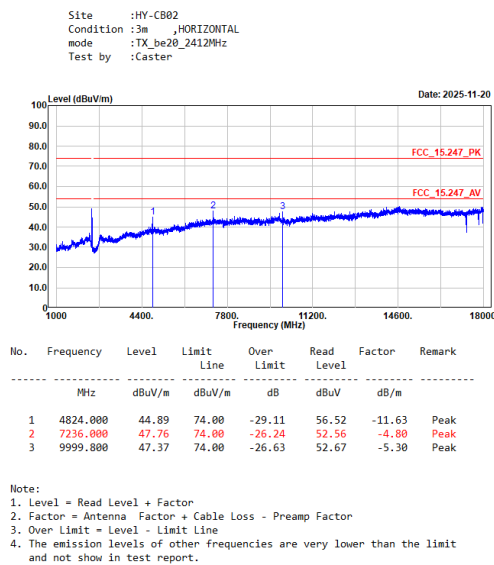


TX_be20_2412MHz_V

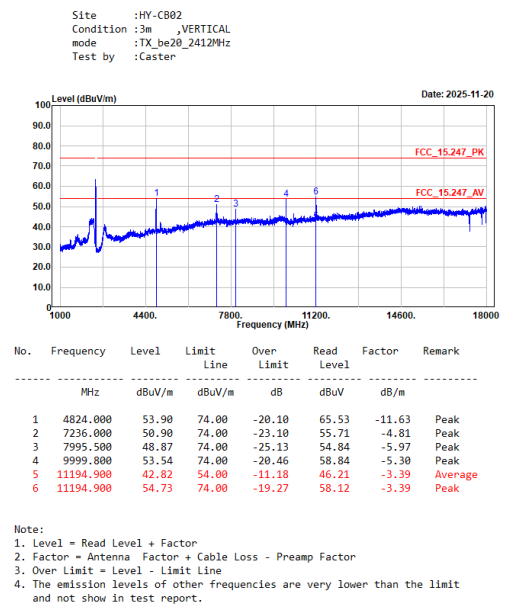

TX_be20_2437MHz_H

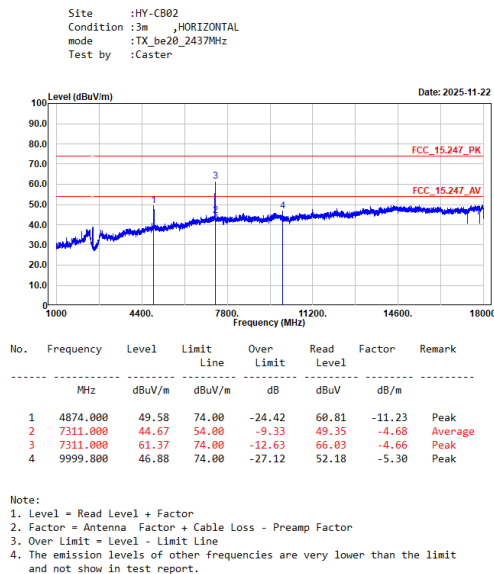


TX_be20_2437MHz_V

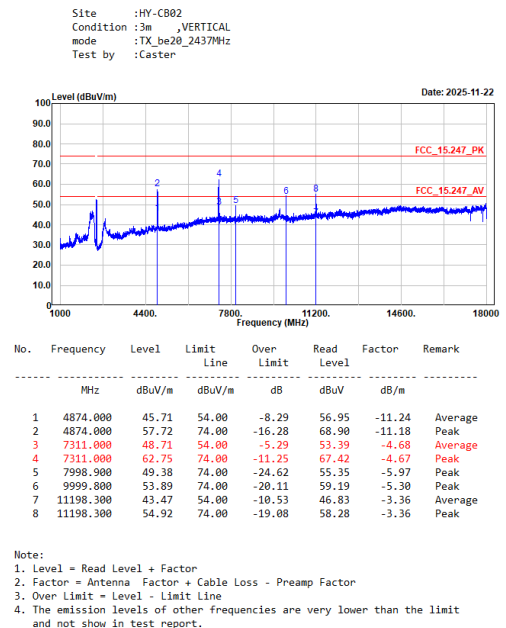

TX_be20_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be20_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	46.89	74.00	-27.11	57.75	-10.86	Peak
2	7386.000	41.80	54.00	-12.20	46.35	-4.55	Average
3	7386.000	55.82	74.00	-18.18	60.37	-4.55	Peak
4	9999.000	47.27	74.00	-26.73	52.57	-5.30	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be20_2462MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7386.000	45.51	54.00	-8.49	50.06	-4.55	Average
2	7386.000	61.26	74.00	-12.74	65.80	-4.54	Peak
3	7993.800	48.93	74.00	-25.07	54.90	-5.97	Peak
4	9999.000	53.63	74.00	-20.37	58.93	-5.30	Peak
5	11193.200	42.34	54.00	-11.66	45.73	-3.39	Average
6	11193.200	54.21	74.00	-19.79	57.60	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2422MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	40.85	74.00	-33.15	52.36	-11.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2422MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2422MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	47.15	74.00	-26.85	58.66	-11.51	Peak
2	7266.000	48.16	74.00	-25.84	52.92	-4.76	Peak
3	7997.200	49.83	74.00	-24.17	55.79	-5.96	Peak
4	9999.000	53.83	74.00	-20.17	59.13	-5.30	Peak
5	11194.900	43.32	54.00	-10.68	46.71	-3.39	Average
6	11194.900	55.45	74.00	-18.55	58.84	-3.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	42.74	74.00	-31.26	53.98	-11.24	Peak
2	9999.800	47.11	74.00	-26.89	52.41	-5.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2437MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	51.57	74.00	-22.43	62.81	-11.24	Peak
2	7311.000	48.12	74.00	-25.88	52.75	-4.63	Peak
3	7993.800	49.35	74.00	-24.65	55.32	-5.97	Peak
4	9999.800	53.91	74.00	-20.09	59.21	-5.30	Peak
5	11194.900	42.87	54.00	-11.13	46.26	-3.39	Average
6	11194.900	54.82	74.00	-19.18	58.21	-3.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2452MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	41.37	74.00	-32.63	52.32	-10.95	Peak
2	9999.800	47.51	74.00	-26.49	52.81	-5.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2452MHz
Test by :Caster



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4904.000	46.64	74.00	-27.36	57.59	-10.95	Peak
2	7356.000	46.98	74.00	-27.02	51.58	-4.60	Peak
3	7993.800	49.34	74.00	-24.66	55.31	-5.97	Peak
4	9999.800	53.87	74.00	-20.13	59.17	-5.30	Peak
5	11193.200	41.76	54.00	-12.24	45.15	-3.39	Average
6	11193.200	54.30	74.00	-19.70	57.69	-3.39	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40_2437MHz_H_QP

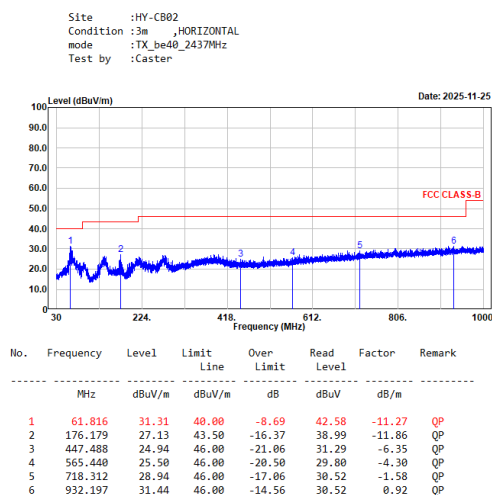


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX be40_2437MHz_V_QP

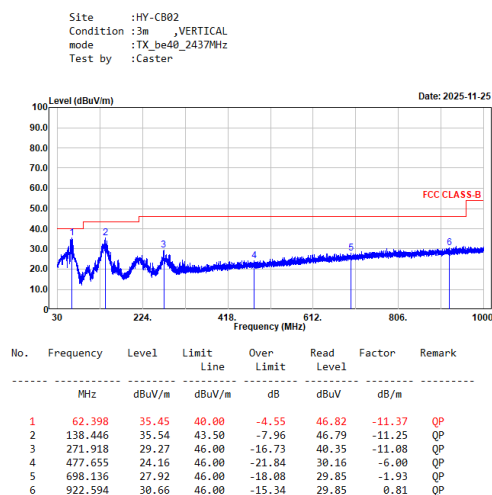


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX b_2412MHz_H Average

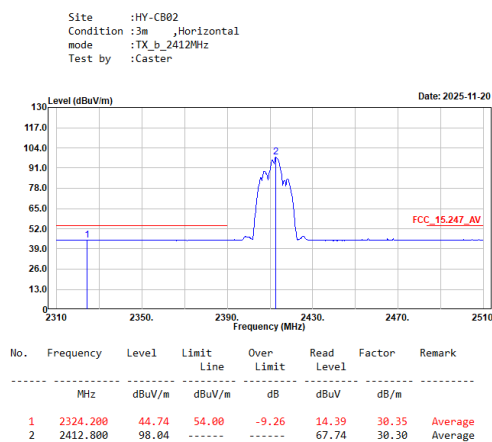


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b_2412MHz_H Peak

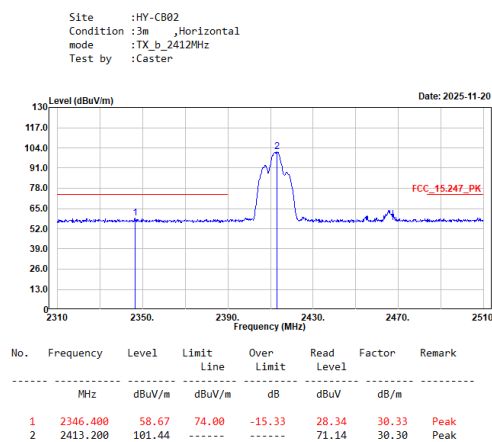

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX b 2412MHz V Average

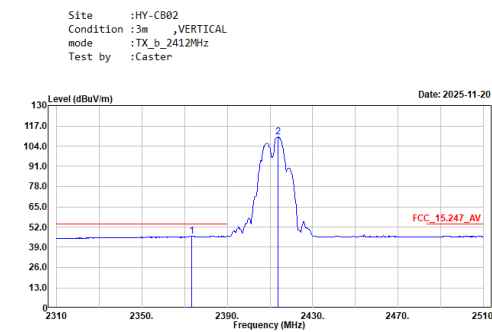

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2373.400	46.10	54.00	-7.90	15.82	30.28	Average
2	2413.600	109.71	54.00	55.71	79.41	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX b 2412MHz V Peak

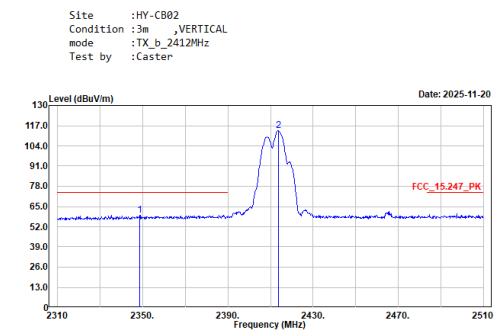

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2348.600	59.46	74.00	-14.54	29.13	30.33	Peak
2	2413.600	113.75	74.00	39.75	83.45	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX b 2462MHz H Average

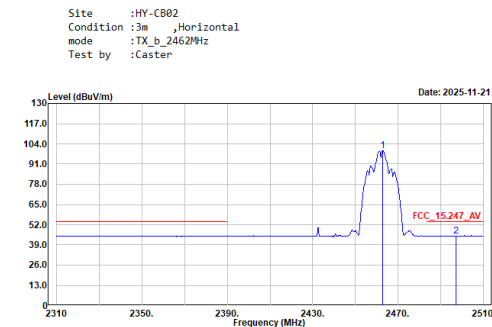

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2462.800	99.67	54.00	45.67	69.43	30.24	Average
2	2497.200	44.88	54.00	-9.12	14.51	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX b 2462MHz H Peak

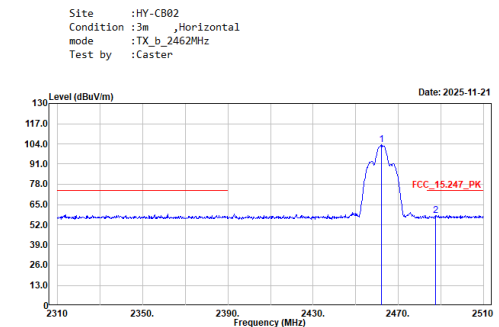

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2462.800	103.28	74.00	29.28	73.04	30.24	Peak
2	2487.600	58.12	74.00	-15.88	27.77	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2462MHz_V Average

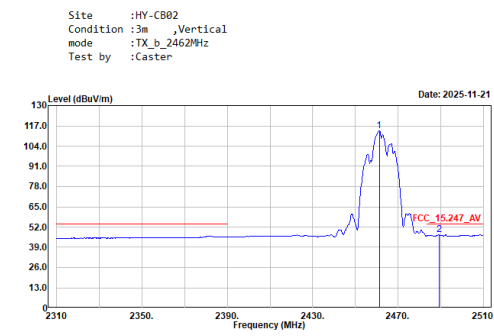

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	113.88	54.00	-7.05	83.64	30.24	Average
2	2489.200	46.95	54.00	-7.05	16.59	30.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2462MHz_V Peak

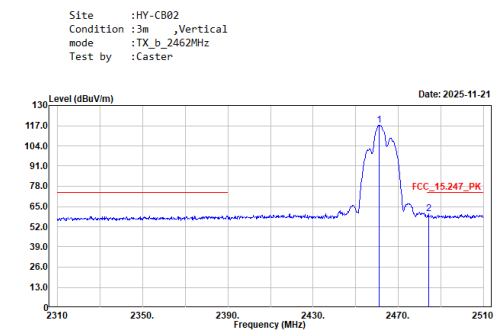

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	117.20	54.00	-13.79	86.96	30.24	Peak
2	2484.200	60.21	54.00	-13.79	29.91	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2412MHz_H Average

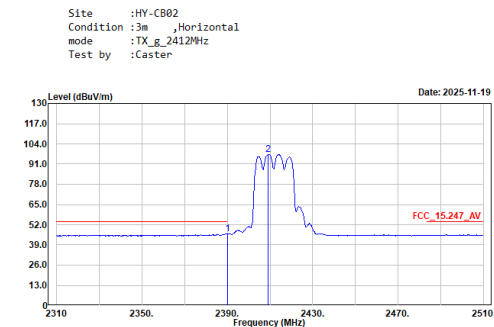

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	46.35	54.00	-7.65	15.98	30.37	Average
2	2409.200	97.32	54.00	-7.65	67.03	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_H Peak

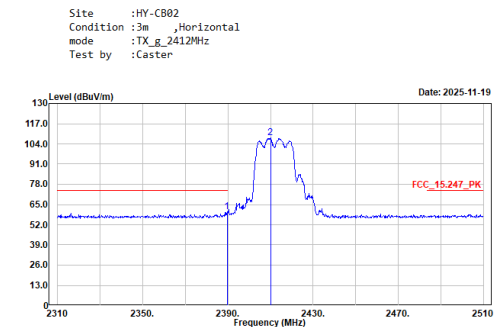


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	60.10	54.00	-13.90	29.73	30.37	Peak
2	2410.000	108.01	54.00	-13.90	77.72	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

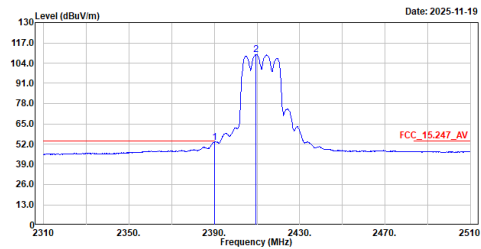


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	53.20	54.00	-0.80	22.83	30.37	Average
2	2409.600	109.63	-----	-----	79.34	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Caster

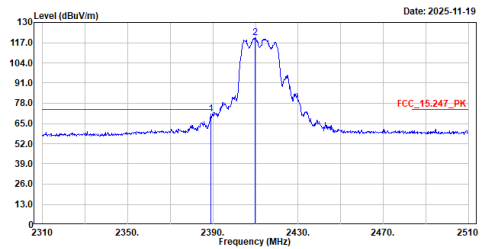


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	71.09	74.00	-2.91	40.72	30.37	Peak
2	2409.600	120.08	-----	-----	89.79	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

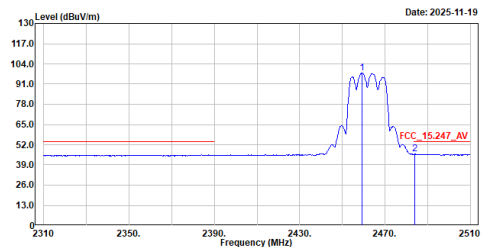


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.400	98.11	-----	-----	67.87	30.24	Average
2	2484.000	46.01	54.00	-7.99	15.71	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Caster

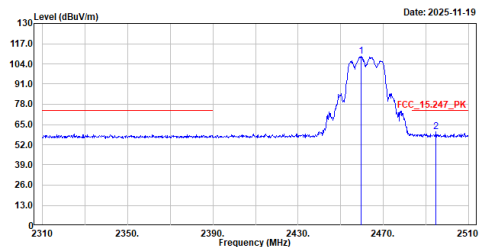

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.400	108.67	-----	-----	78.43	30.24	Peak
2	2484.000	60.47	74.00	-13.53	30.10	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2462MHz_V_Average

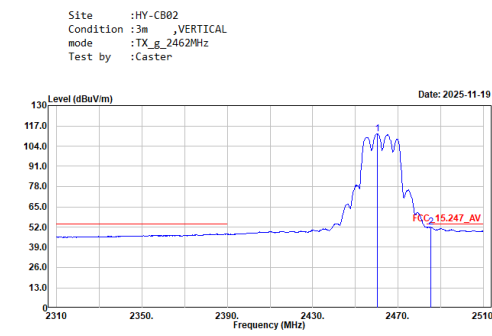

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.200	111.69	54.00	-2.05	81.45	30.24	Average
2	2485.200	51.95	54.00	-2.05	21.64	30.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2462MHz_V_Peak

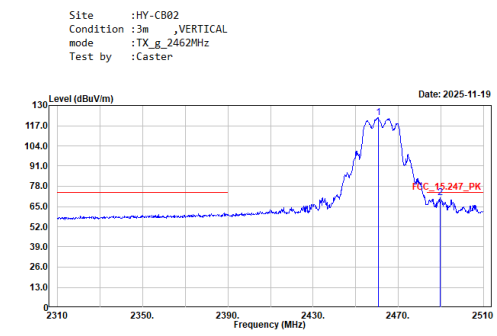

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2460.600	122.03	54.00	-3.43	91.79	30.24	Peak
2	2489.600	70.57	54.00	-3.43	40.20	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n20_2412MHz_H_Average

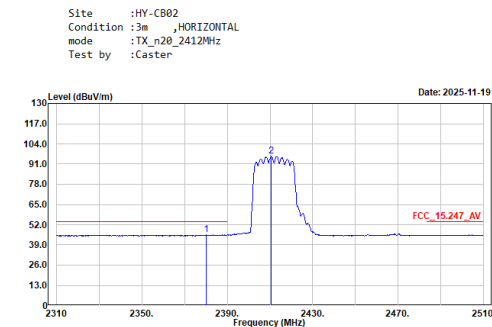

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2380.000	45.48	54.00	-8.52	15.12	30.36	Average
2	2410.600	96.15	54.00	-8.52	65.86	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Peak

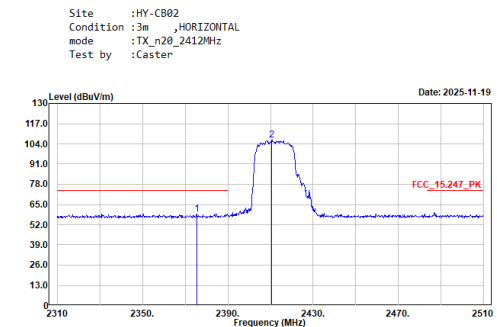


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2375.400	59.11	54.00	-14.89	28.80	30.31	Peak
2	2410.600	106.38	54.00	-14.89	76.09	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Caster




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	49.98	54.00	-4.02	19.61	30.37	Average
2	2410.600	107.77	-----	-----	77.48	30.29	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Caster

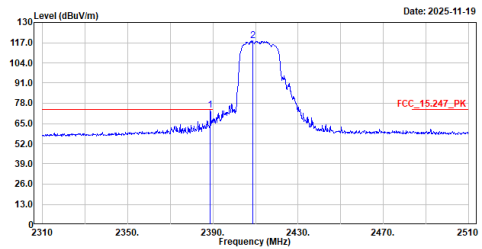


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.800	73.47	74.00	-0.53	43.10	30.37	Peak
2	2408.600	118.28	-----	-----	87.99	30.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

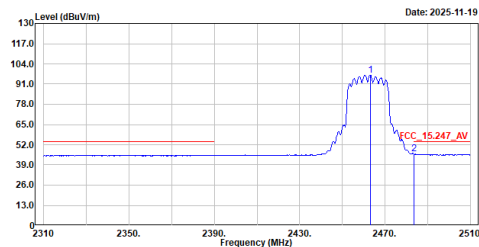


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2463.200	96.85	-----	-----	66.61	30.24	Average
2	2483.600	46.02	54.00	-7.98	15.72	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Caster

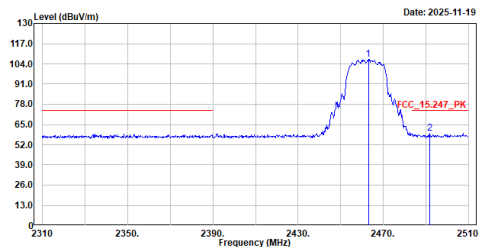


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2463.000	107.11	-----	-----	76.87	30.24	Peak
2	2491.800	59.22	74.00	-14.78	28.85	30.37	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Average

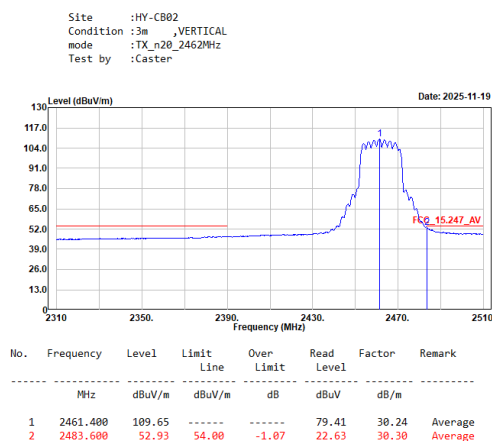


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Peak

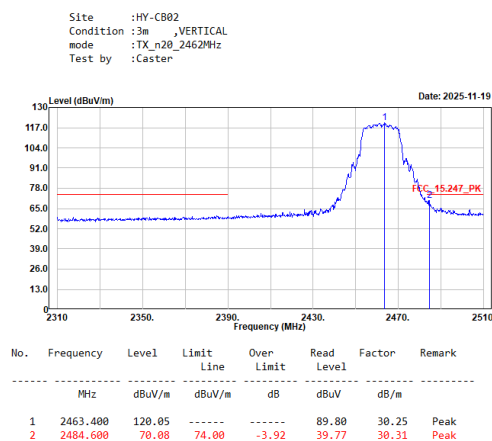


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Average

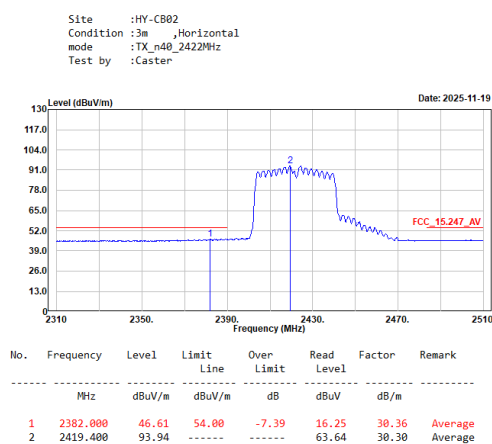

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n40_2422MHz_H_Peak

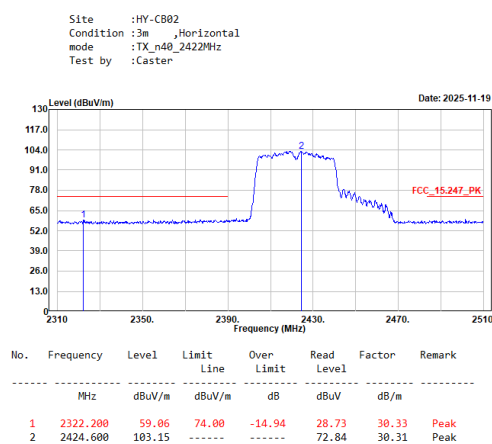

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Caster

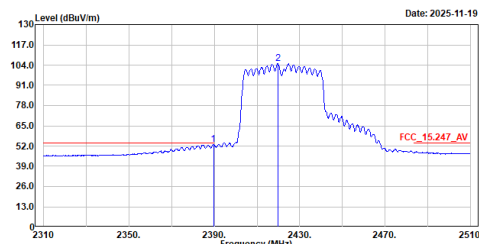


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	52.94	54.00	-1.06	22.57	30.37	Average
2	2419.800	104.91	-----	-----	74.61	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Caster

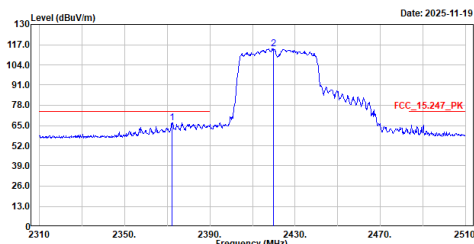


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2372.400	66.93	74.00	-7.07	36.66	30.27	Peak
2	2420.000	114.52	-----	-----	84.22	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Caster

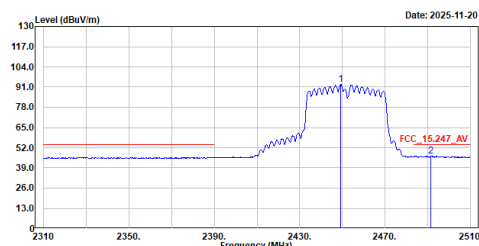


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2449.200	92.66	-----	-----	62.44	30.22	Average
2	2491.600	46.60	54.00	-7.40	16.23	30.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Peak


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Caster

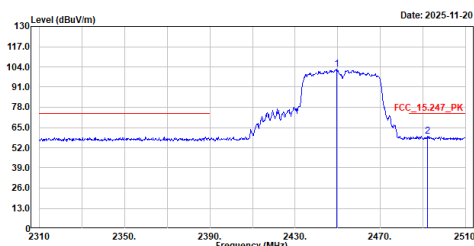

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2449.400	102.33	-----	-----	72.11	30.22	Peak
2	2492.000	59.54	74.00	-14.46	29.17	30.37	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Average

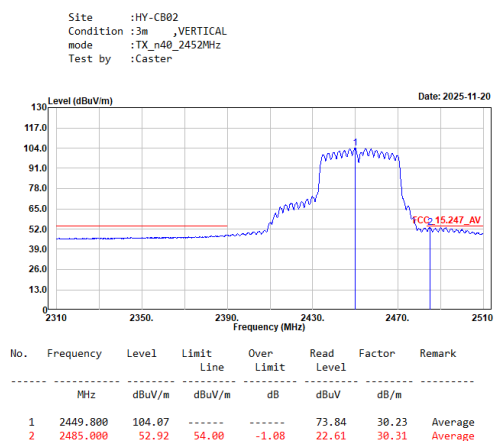


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Peak

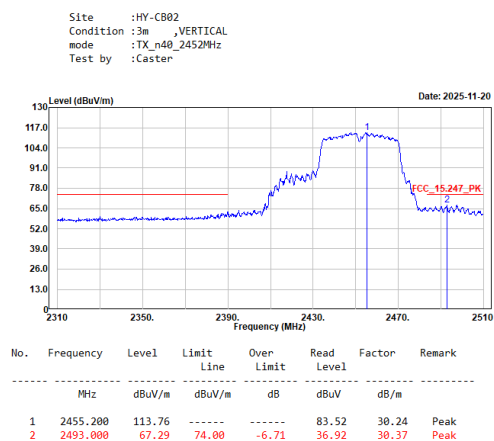


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_H_Average

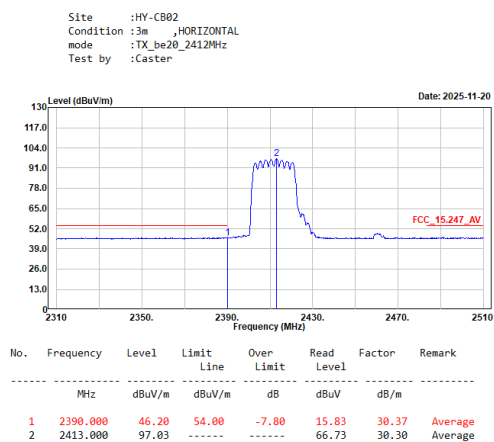

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be20_2412MHz_H_Peak

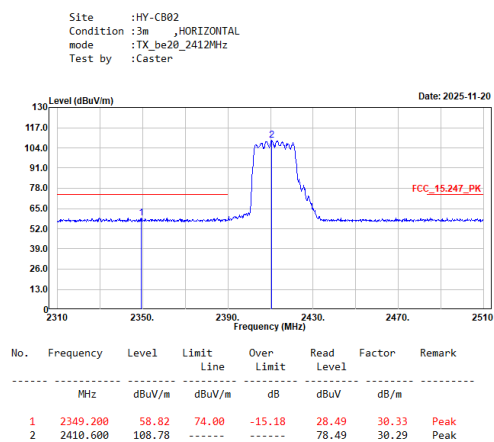

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be20_2412MHz
Test by :Caster

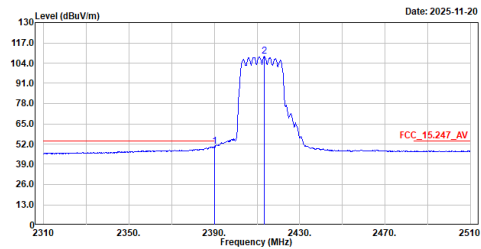


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	50.32	54.00	-3.68	19.95	30.37	Average
2	2413.400	108.31	-----	-----	78.01	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2412MHz_V_Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be20_2412MHz
Test by :Caster

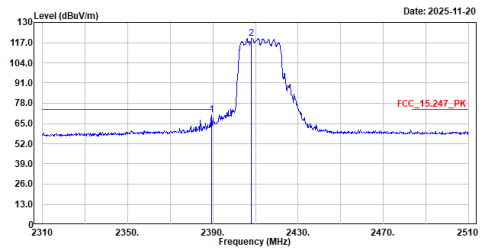


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	70.66	74.00	-3.34	40.29	30.37	Peak
2	2408.200	119.61	-----	-----	89.32	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be20_2462MHz
Test by :Caster

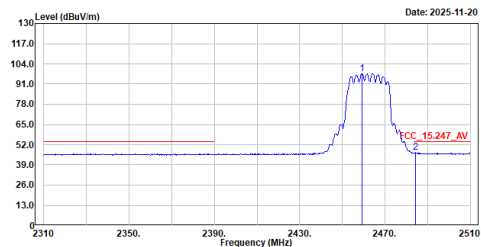


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.200	97.68	-----	-----	67.44	30.24	Average
2	2484.400	46.93	54.00	-7.07	16.63	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be20_2462MHz
Test by :Caster

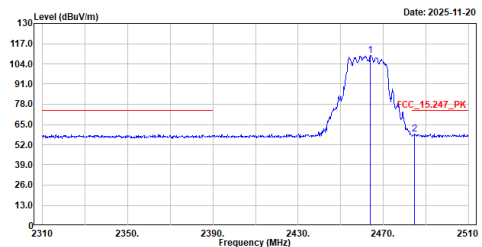


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.000	109.60	-----	-----	79.35	30.25	Peak
2	2484.800	58.83	74.00	-15.17	28.52	30.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be20_2462MHz
Test by :Caster

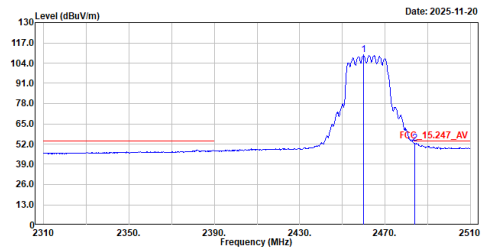


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	109.34	54.00	-1.54	79.10	30.24	Average
2	2483.800	52.46	54.00	-1.54	22.16	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be20_2462MHz
Test by :Caster

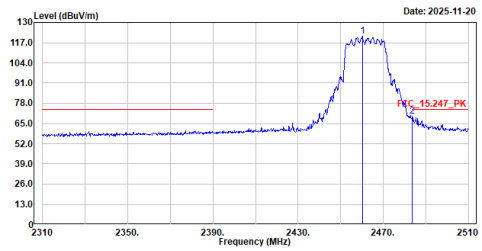


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.200	121.19	54.00	-4.57	90.95	30.24	Peak
2	2483.600	69.43	54.00	-4.57	39.13	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2422MHz
Test by :Caster

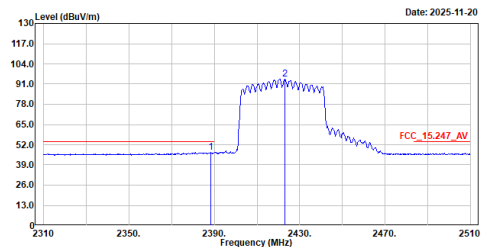


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	46.94	54.00	-7.06	16.57	30.37	Average
2	2423.000	94.32	54.00	-40.32	64.01	30.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Peak

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2422MHz
Test by :Caster

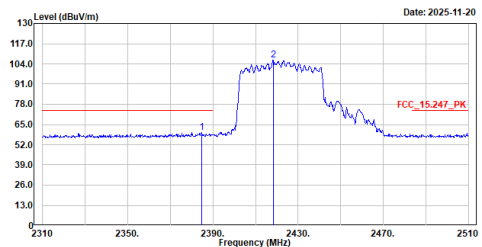


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2384.600	59.90	54.00	-4.10	29.53	30.37	Peak
2	2418.400	106.31	54.00	-52.31	76.01	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2422MHz
Test by :Caster

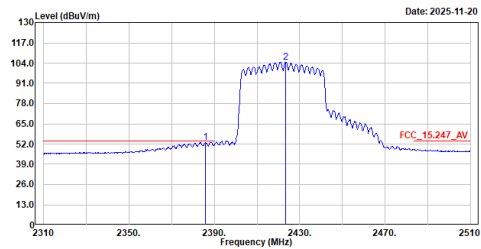


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	53.17	54.00	-0.83	22.80	30.37	Average
2	2423.400	104.73	-----	-----	74.42	30.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2422MHz
Test by :Caster

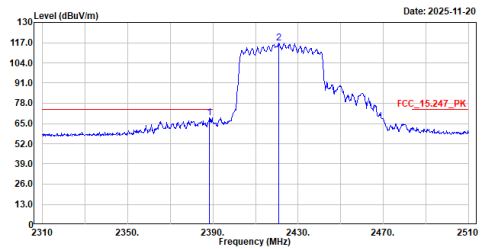


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	68.57	74.00	-5.43	38.20	30.37	Peak
2	2421.000	116.69	-----	-----	86.39	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Average

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2452MHz
Test by :Caster

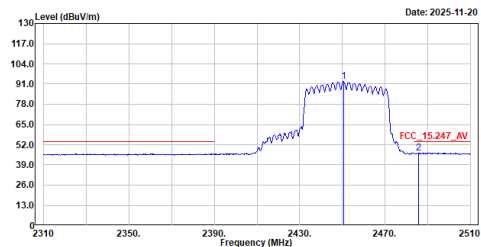


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.600	92.87	-----	-----	62.64	30.23	Average
2	2485.800	46.85	54.00	-7.15	16.53	30.32	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Peak

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2452MHz
Test by :Caster

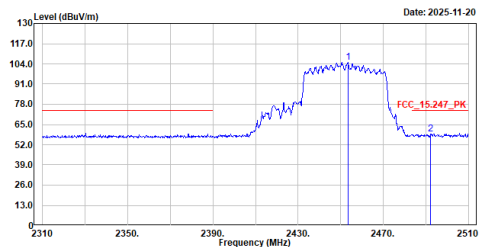


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.400	104.98	-----	-----	74.74	30.24	Peak
2	2492.200	58.97	74.00	-15.03	28.60	30.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Average

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2452MHz
Test by :Caster

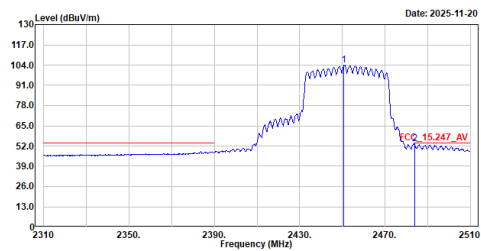


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.800	103.81	-----	-----	73.58	30.23	Average
2	2483.800	53.41	54.00	-0.59	23.11	30.30	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_be40_2452MHz_V_Peak

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2452MHz
Test by :Caster

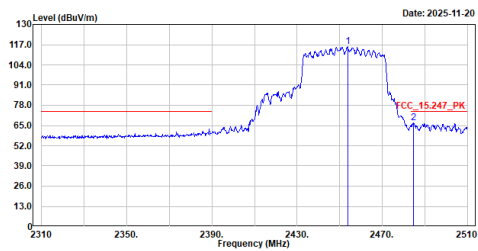


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	115.95	-----	-----	85.71	30.24	Peak
2	2484.800	66.58	74.00	-7.42	36.27	30.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_be40_2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_be40_2437MHz
Test by :Caster

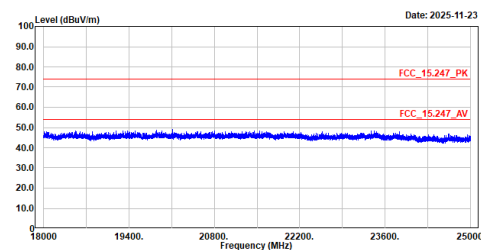

TX_be40_2437MHz_V


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_be40_2437MHz
Test by :Caster

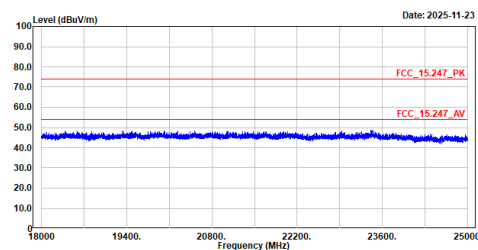

M/N: AW7990-NPD, Antenna: Dipole

TX g 2412MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Bob Chiu

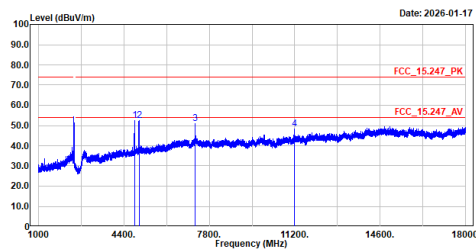


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	52.59	74.00	-21.41	64.38	-11.79	Peak
2	4999.250	52.57	74.00	-21.43	63.36	-10.79	Peak
3	7236.000	50.00	74.00	-23.20	56.12	-5.32	Peak
4	11192.030	48.48	74.00	-25.52	52.55	-4.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2412MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Bob Chiu

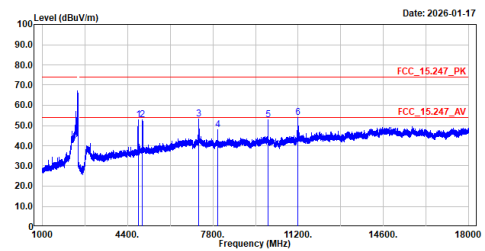


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	52.67	74.00	-21.33	64.46	-11.79	Peak
2	4981.188	53.02	74.00	-20.98	63.90	-10.88	Peak
3	7236.000	53.06	74.00	-20.94	58.38	-5.32	Peak
4	7994.969	47.80	74.00	-26.20	54.14	-6.34	Peak
5	10000.440	52.90	74.00	-21.10	58.86	-5.96	Peak
6	11194.690	53.78	74.00	-20.22	57.84	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2437MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Bob Chiu

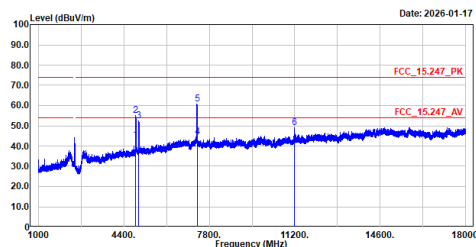


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	43.10	54.00	-10.90	54.58	-11.48	Average
2	4874.000	55.22	74.00	-18.78	66.70	-11.48	Peak
3	4982.781	52.52	74.00	-21.48	63.39	-10.87	Peak
4	7311.000	44.44	54.00	-9.56	49.66	-5.22	Average
5	7311.000	60.77	74.00	-13.23	65.99	-5.22	Peak
6	11188.310	49.04	74.00	-24.96	53.10	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2437MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Bob Chiu

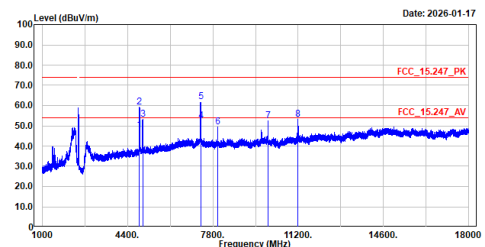


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	47.86	54.00	-6.14	59.34	-11.48	Average
2	4874.000	59.10	74.00	-14.90	70.58	-11.48	Peak
3	5000.313	53.07	74.00	-20.93	63.85	-10.78	Peak
4	7311.000	52.47	54.00	-1.53	57.69	-5.22	Average
5	7311.000	61.70	74.00	-12.30	66.92	-5.22	Peak
6	7997.094	49.51	74.00	-24.49	55.85	-6.34	Peak
7	10000.440	52.48	74.00	-21.52	58.44	-5.96	Peak
8	11192.560	53.20	74.00	-20.80	57.26	-4.06	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

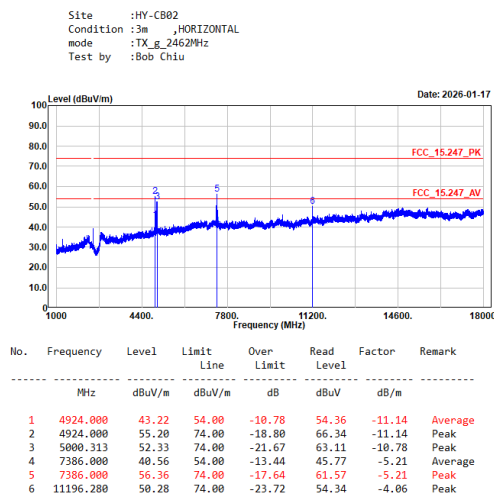


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

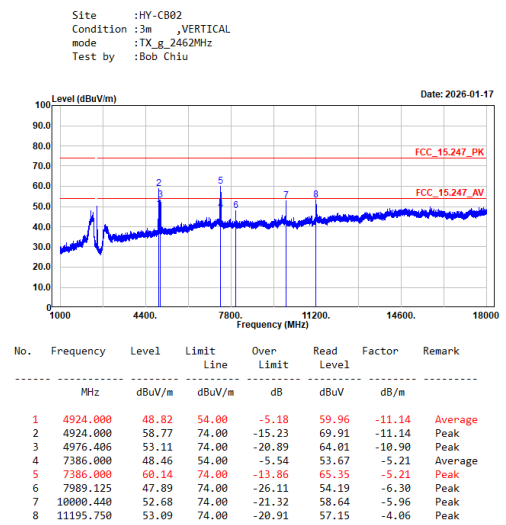


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_QP

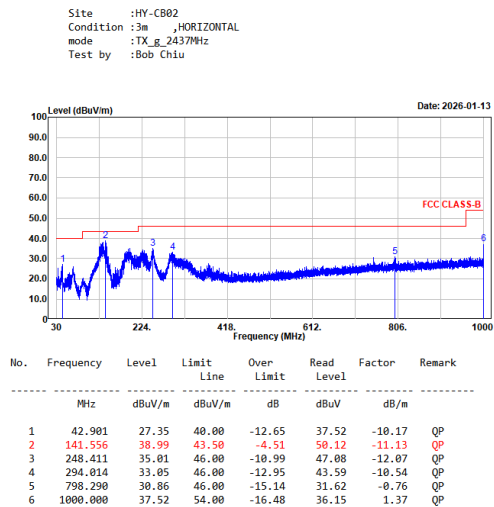


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_g_2437MHz_V_QP

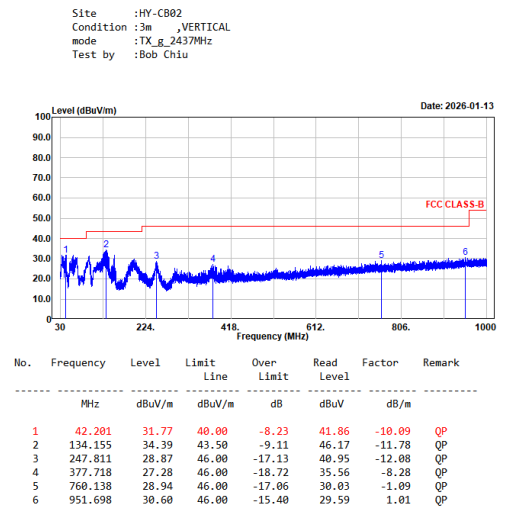


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX b 2412MHz H Average

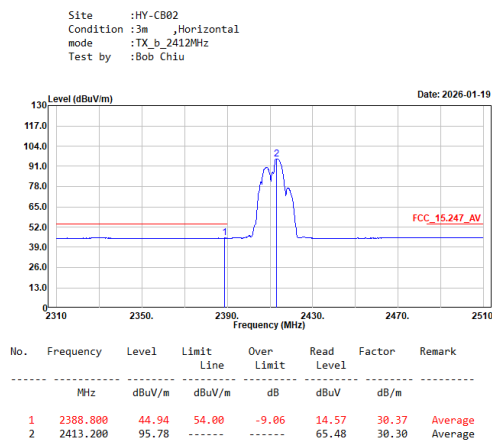


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz H Peak

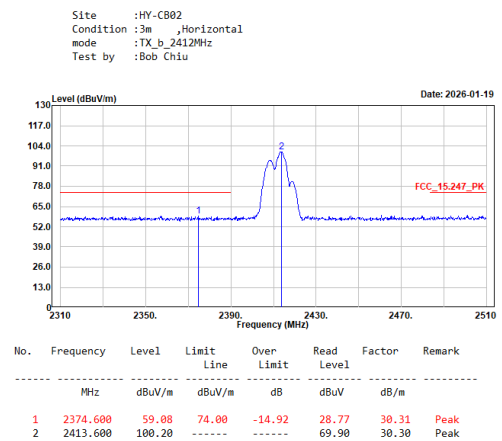


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V Average

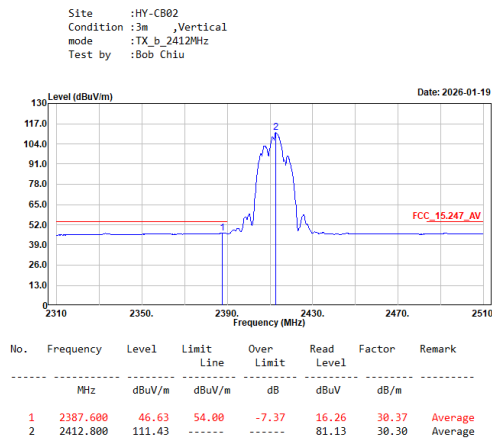

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX b 2412MHz V Peak

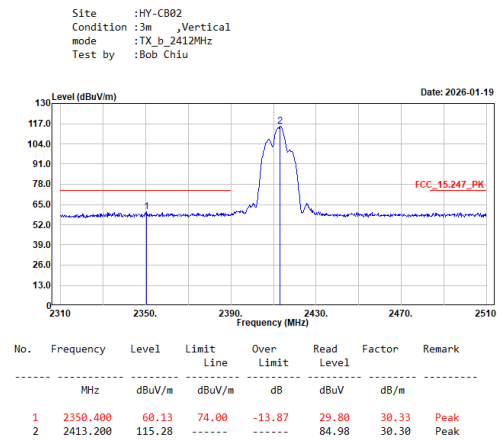

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

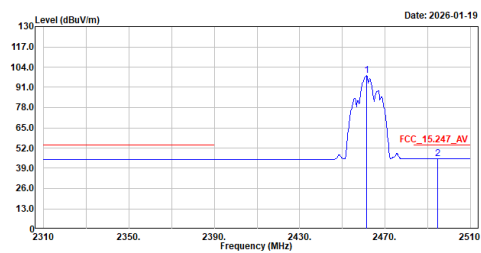


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.400	98.52	-----	-----	68.45	30.07	Average
2	2494.800	45.07	54.00	-8.93	14.88	30.19	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

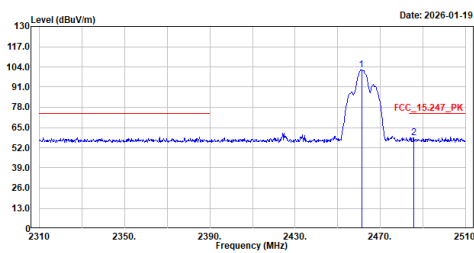


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	102.12	-----	-----	72.05	30.07	Peak
2	2485.600	58.54	74.00	-15.46	28.40	30.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

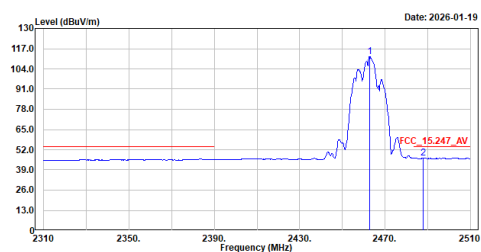


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	111.86	-----	-----	81.79	30.07	Average
2	2488.000	46.77	54.00	-7.23	16.60	30.17	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

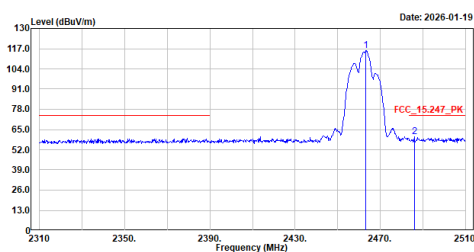


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.200	115.68	-----	-----	85.61	30.07	Peak
2	2486.000	60.36	74.00	-13.64	30.22	30.14	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

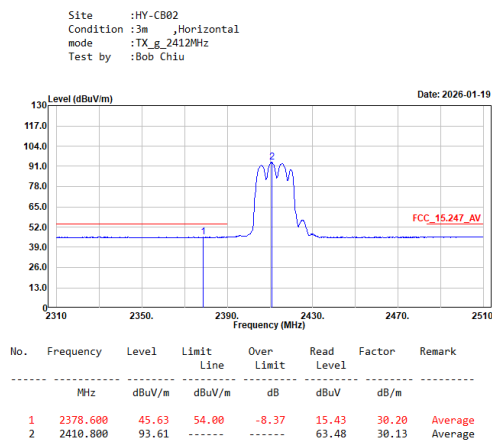


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

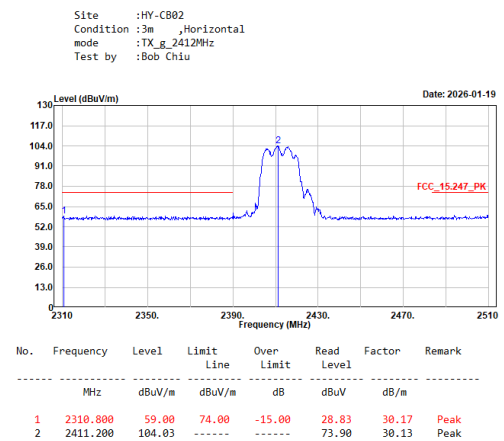


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

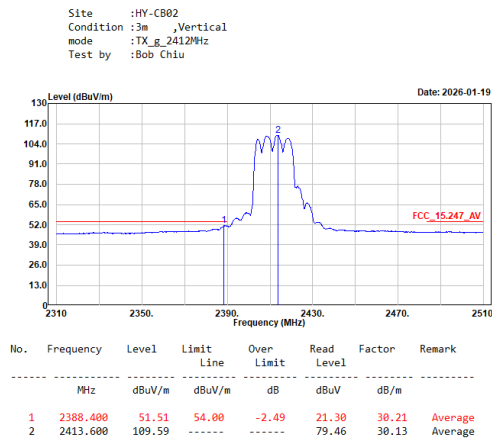

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g_2412MHz_V_Peak

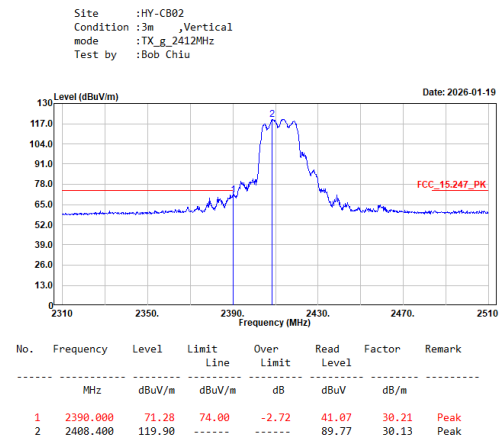

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2462MHz
Test by :Bob Chiu

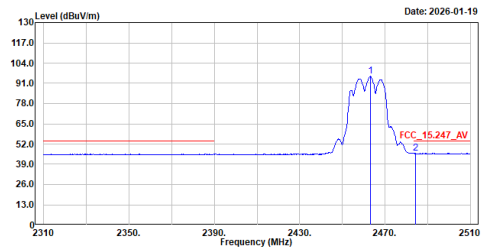


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.200	95.51	-----	-----	65.44	30.07	Average
2	2484.200	46.17	54.00	-7.83	16.05	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_g_2462MHz
Test by :Bob Chiu

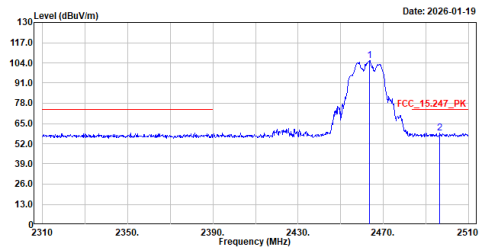


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.400	105.38	-----	-----	75.31	30.07	Peak
2	2496.600	58.97	74.00	-15.03	28.78	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Bob Chiu

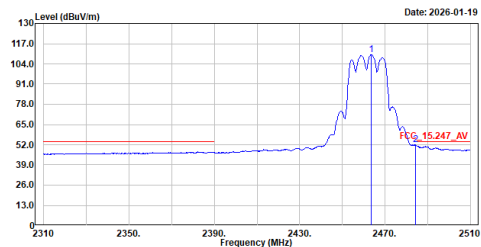


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2463.400	109.86	-----	-----	79.79	30.07	Average
2	2484.400	51.80	54.00	-2.20	21.68	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Bob Chiu

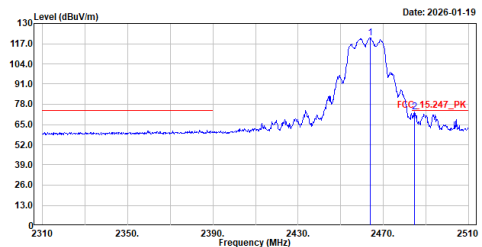

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.000	120.64	-----	-----	90.57	30.07	Peak
2	2484.800	73.25	74.00	-0.75	43.12	30.13	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Average

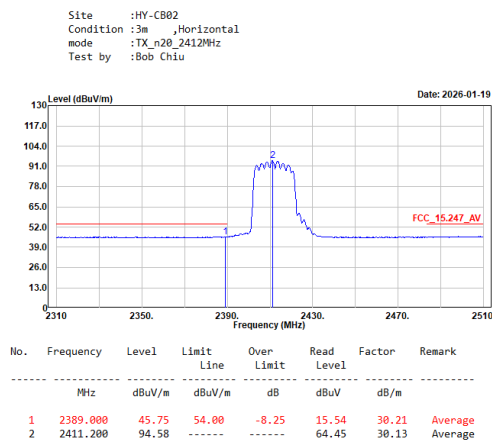


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Peak

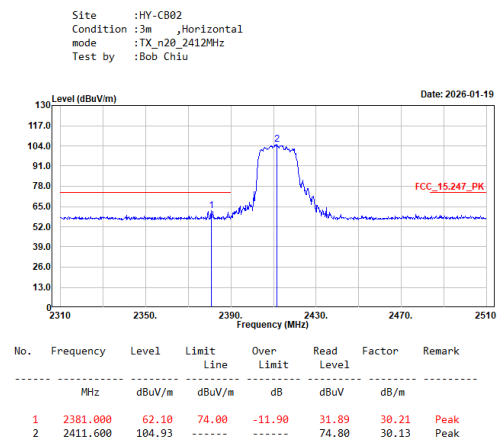


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Average

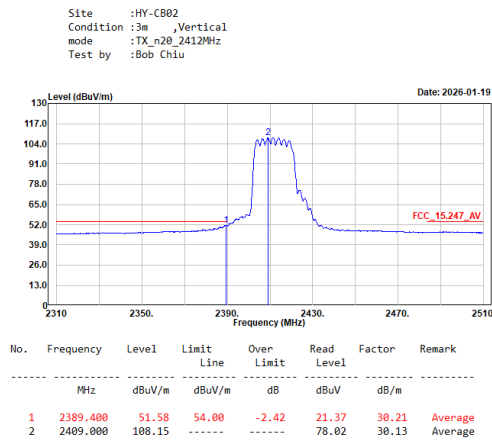

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n20_2412MHz_V_Peak

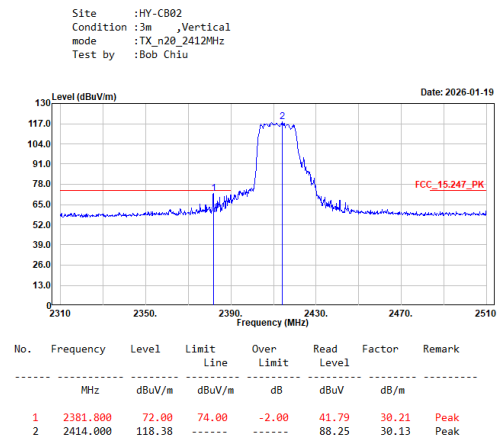

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Bob Chiu

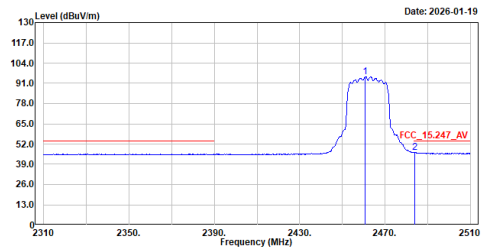


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	95.32	-----	-----	65.25	30.07	Average
2	2483.800	46.49	54.00	-7.51	16.37	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Bob Chiu

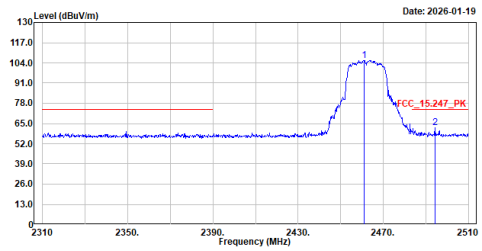


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	105.65	-----	-----	75.58	30.07	Peak
2	2494.200	62.43	74.00	-11.57	32.24	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Bob Chiu

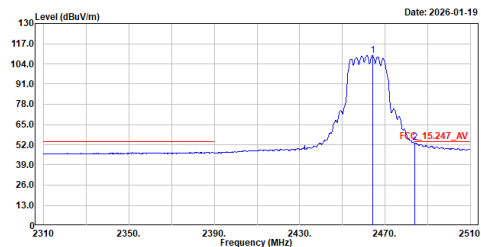


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.200	109.44	-----	-----	79.37	30.07	Average
2	2483.800	53.23	54.00	-0.77	23.11	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Bob Chiu

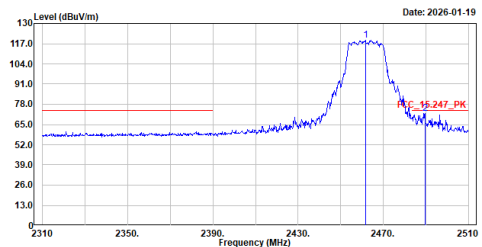


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.600	119.38	-----	-----	89.31	30.07	Peak
2	2489.600	72.13	74.00	-1.87	41.94	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Bob Chiu

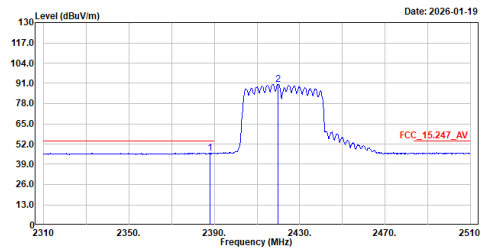


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.000	46.20	54.00	-7.80	15.99	30.21	Average
2	2419.800	90.51	-----	-----	60.37	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Bob Chiu




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.200	60.25	74.00	-13.75	30.04	30.21	Peak
2	2414.800	100.05	-----	-----	69.91	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Bob Chiu

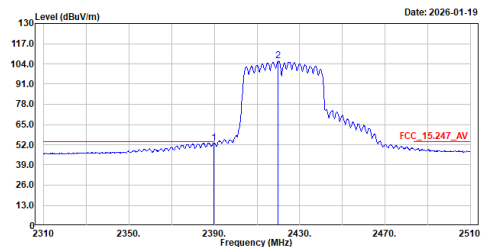


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	53.13	54.00	-0.87	22.92	30.21	Average
2	2420.000	105.75	-----	-----	75.61	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Bob Chiu

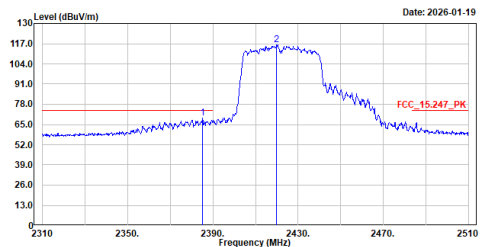


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2385.200	69.12	74.00	-4.88	38.91	30.21	Peak
2	2420.000	116.19	-----	-----	86.05	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

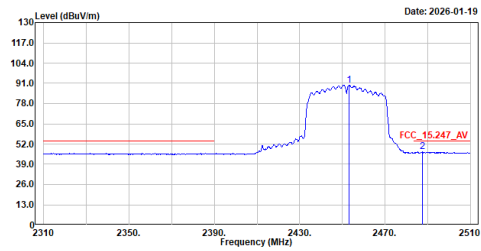


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.200	89.91	-----	-----	59.85	30.06	Average
2	2487.600	46.87	54.00	-7.13	16.70	30.17	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

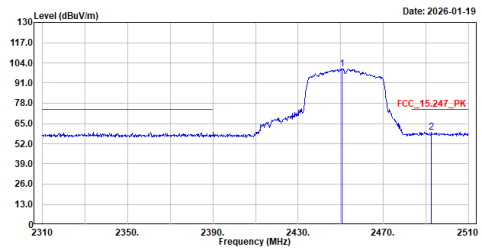


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.600	100.07	-----	-----	70.01	30.06	Peak
2	2492.600	59.53	74.00	-14.47	29.34	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Bob Chiu

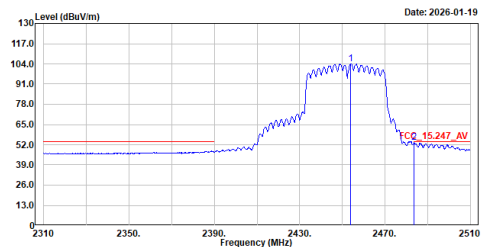


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.000	104.14	-----	-----	74.07	30.07	Average
2	2483.600	53.41	54.00	-0.59	23.29	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Bob Chiu

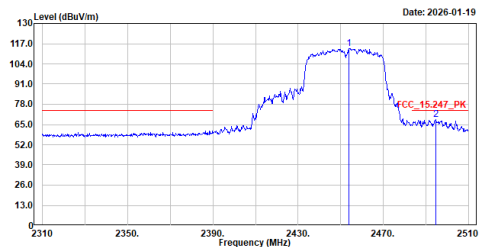


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	114.03	-----	-----	83.96	30.07	Peak
2	2494.600	68.03	74.00	-5.97	37.84	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2412MHz
Test by :Bob Chiu

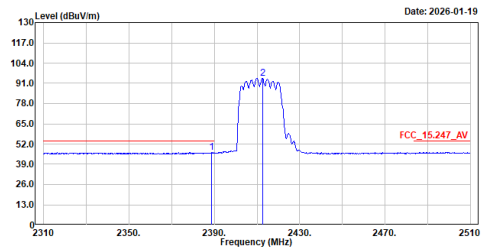


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.000	46.73	54.00	-7.27	16.52	30.21	Average
2	2412.000	94.30	-----	-----	64.17	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2412MHz
Test by :Bob Chiu

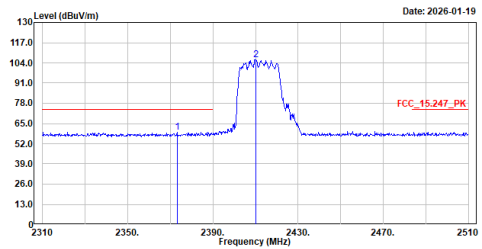


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2373.200	59.54	74.00	-14.46	29.41	30.13	Peak
2	2410.200	106.04	-----	-----	75.91	30.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2412MHz
Test by :Bob Chiu

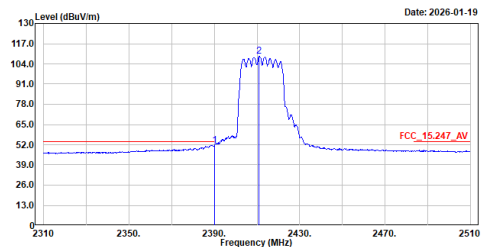


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.53	54.00	-2.47	21.32	30.21	Average
2	2411.000	108.71	-----	-----	78.58	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2412MHz
Test by :Bob Chiu

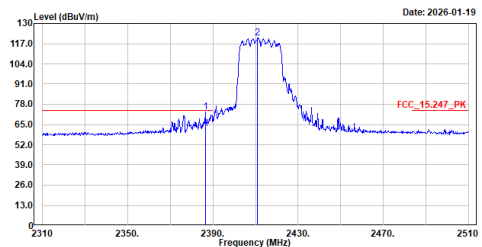


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.400	73.11	74.00	-0.89	42.90	30.21	Peak
2	2411.000	120.60	-----	-----	90.47	30.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2462MHz
Test by :Bob Chiu

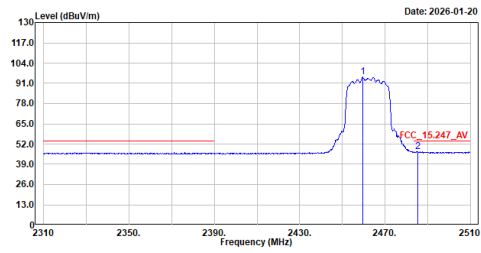


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.600	94.98	54.00	-6.98	64.91	30.07	Average
2	2485.200	47.02	54.00		16.89	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2462MHz
Test by :Bob Chiu

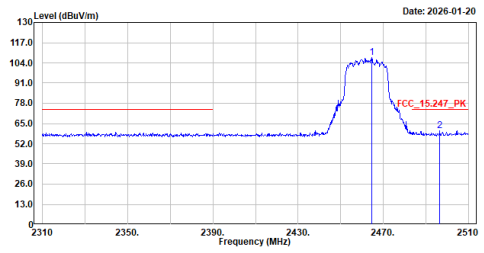


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2464.600	107.45	54.00	-13.90	77.38	30.07	Peak
2	2496.600	60.10	54.00		29.91	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

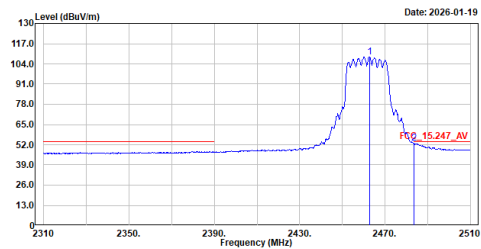


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	108.59	54.00	-0.98	78.52	30.07	Average
2	2483.600	53.02	54.00		22.90	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

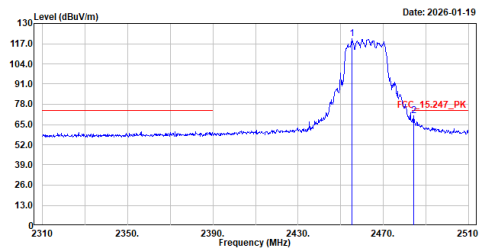


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2455.200	120.10	54.00	-3.57	90.03	30.07	Peak
2	2484.400	70.43	54.00		40.31	30.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

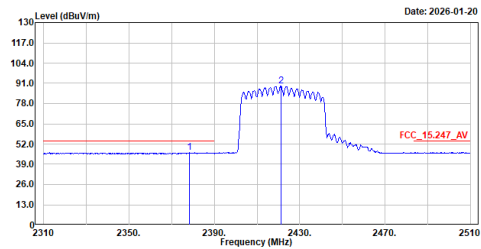


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2378.400	46.55	54.00	-7.45	16.36	30.19	Average
2	2421.200	89.45	-----	-----	59.31	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

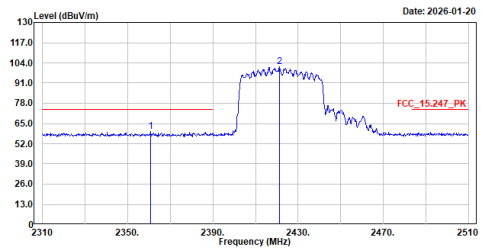


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2360.800	59.76	74.00	-14.24	29.58	30.18	Peak
2	2421.400	101.76	-----	-----	71.62	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu

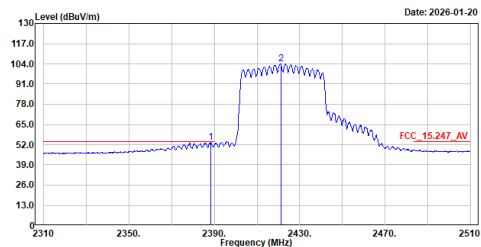


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.400	53.41	54.00	-0.59	23.20	30.21	Average
2	2421.200	104.01	-----	-----	73.87	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu

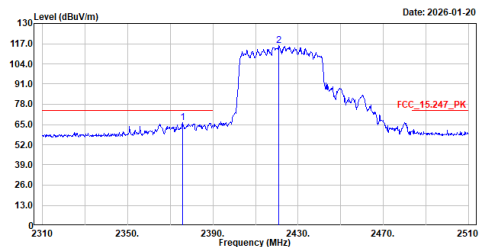


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2375.800	66.05	74.00	-7.95	35.89	30.16	Peak
2	2421.000	115.65	-----	-----	85.51	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

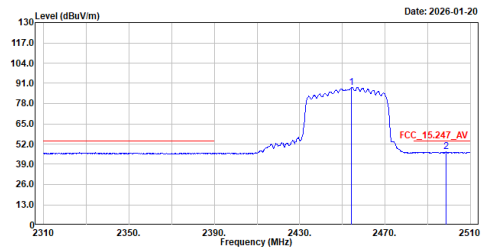


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.200	88.40	-----	-----	58.33	30.07	Average
2	2498.600	47.31	54.00	-6.69	17.12	30.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

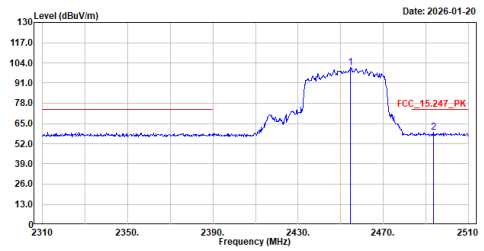


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.600	101.14	-----	-----	71.07	30.07	Peak
2	2493.600	59.31	74.00	-14.69	29.12	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu

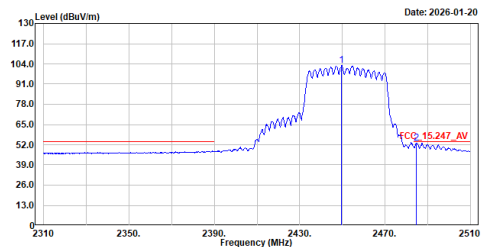


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2449.600	102.84	-----	-----	72.78	30.06	Average
2	2484.800	53.03	54.00	-0.97	22.90	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX be40 2452MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu

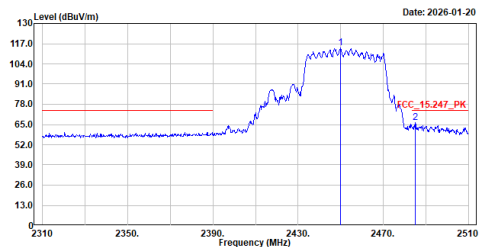

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.000	114.20	-----	-----	84.14	30.06	Peak
2	2485.000	66.29	74.00	-7.71	36.16	30.13	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

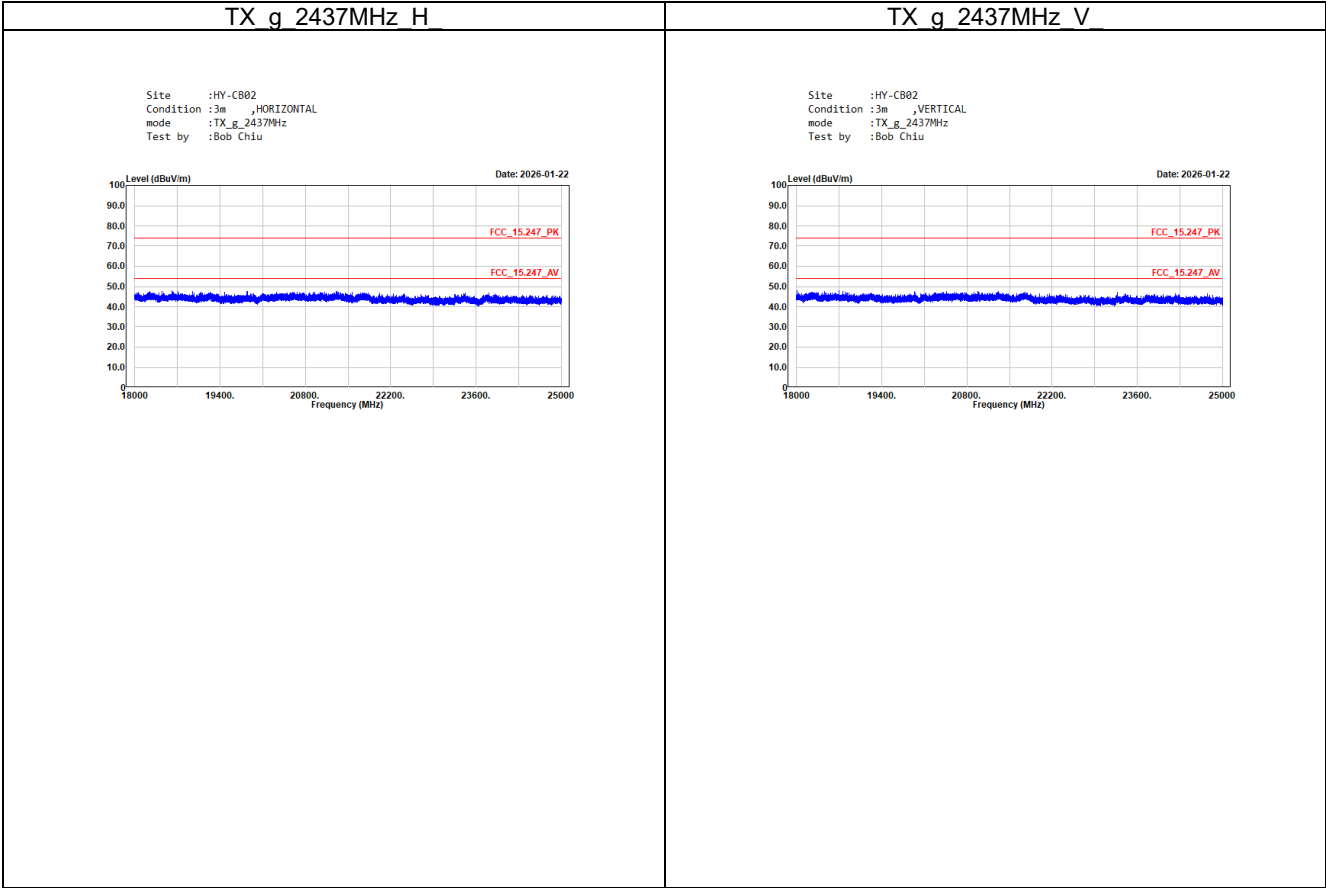

M/N: AW7990-NPD, Antenna: PCB

TX g 2412MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Bob Chiu

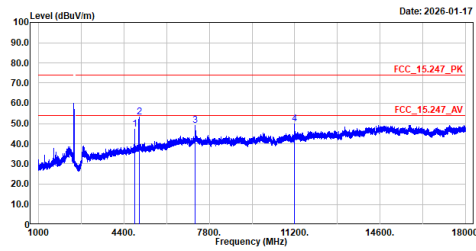


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	46.98	74.00	-27.02	58.77	-11.79	Peak
2	5000.313	53.20	74.00	-20.80	63.98	-10.78	Peak
3	7236.000	48.98	74.00	-25.02	54.30	-5.32	Peak
4	11190.440	49.78	74.00	-24.22	53.85	-4.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2412MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Bob Chiu

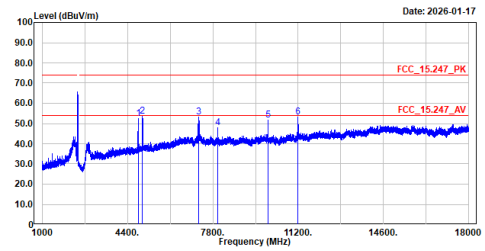


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	52.61	74.00	-21.39	64.40	-11.79	Peak
2	4976.938	53.75	74.00	-20.25	64.65	-10.90	Peak
3	7236.000	53.36	74.00	-20.64	58.68	-5.32	Peak
4	7997.625	47.88	74.00	-26.12	54.22	-6.34	Peak
5	9999.906	51.76	74.00	-22.24	57.72	-5.96	Peak
6	11194.690	53.38	74.00	-20.62	57.44	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2437MHz H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Bob Chiu

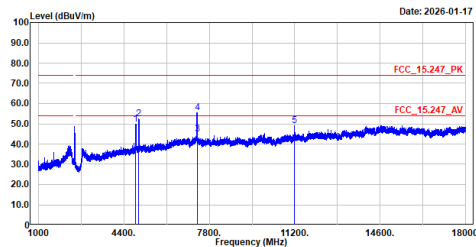


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	49.92	74.00	-24.08	61.40	-11.48	Peak
2	4991.281	52.43	74.00	-21.57	63.26	-10.83	Peak
3	7311.000	44.85	54.00	-9.15	50.07	-5.22	Average
4	7311.000	55.34	74.00	-18.66	60.56	-5.22	Peak
5	11188.840	49.15	74.00	-24.85	53.21	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX g 2437MHz V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Bob Chiu

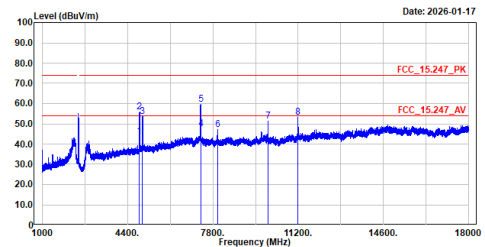


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	43.77	54.00	-10.23	55.25	-11.48	Average
2	4874.000	55.98	74.00	-18.02	67.46	-11.48	Peak
3	4992.344	53.64	74.00	-20.36	64.47	-10.83	Peak
4	7311.000	47.56	54.00	-6.44	52.78	-5.22	Average
5	7311.000	59.57	74.00	-14.33	64.89	-5.22	Peak
6	7989.656	47.21	74.00	-26.79	53.52	-6.31	Peak
7	9999.906	51.34	74.00	-22.66	57.30	-5.96	Peak
8	11188.310	53.03	74.00	-20.97	57.09	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Bob Chiu

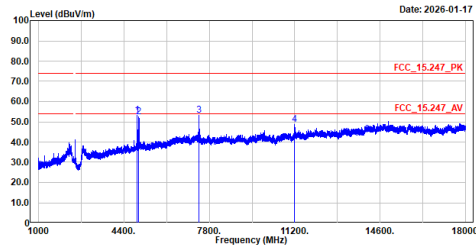


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	53.21	74.00	-20.79	64.35	-11.14	Peak
2	4995.000	52.31	74.00	-21.69	63.12	-10.81	Peak
3	7386.000	53.14	74.00	-20.86	58.35	-5.21	Peak
4	11193.630	48.72	74.00	-25.28	52.78	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Bob Chiu

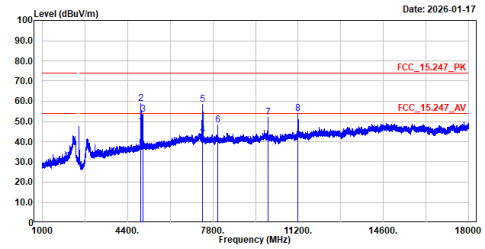


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	47.68	54.00	-6.32	58.82	-11.14	Average
2	4924.000	58.69	74.00	-15.31	69.83	-11.14	Peak
3	4999.781	53.56	74.00	-20.44	64.35	-10.79	Peak
4	7386.000	43.35	54.00	-10.65	48.56	-5.21	Average
5	7386.000	58.63	74.00	-15.37	63.84	-5.21	Peak
6	7993.906	48.46	74.00	-25.54	54.79	-6.33	Peak
7	10000.440	52.15	74.00	-21.85	58.11	-5.96	Peak
8	11194.690	53.98	74.00	-20.02	58.04	-4.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H_QP

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Bob Chiu

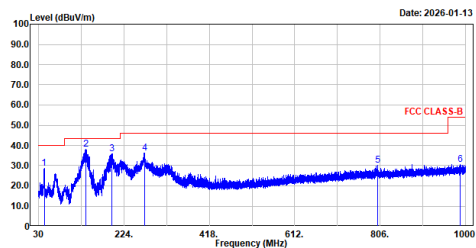


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	42.751	28.50	40.00	-11.50	38.66	-10.16	QP
2	137.156	38.20	43.50	-5.30	49.77	-11.57	QP
3	196.559	35.86	43.50	-7.64	49.69	-13.83	QP
4	271.062	36.29	46.00	-9.71	47.55	-11.26	QP
5	799.940	30.36	46.00	-15.64	31.12	-0.76	QP
6	988.199	30.54	54.00	-23.46	29.21	1.33	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_g_2437MHz_V_QP

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Bob Chiu

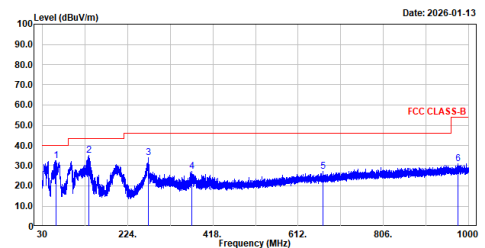


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	61.252	32.46	40.00	-7.54	43.68	-11.22	QP
2	135.655	35.09	43.50	-8.41	46.76	-11.67	QP
3	270.912	34.05	46.00	-11.95	45.31	-11.26	QP
4	370.668	27.34	46.00	-18.66	35.96	-8.62	QP
5	668.283	27.00	46.00	-19.00	29.63	-2.63	QP
6	975.549	30.91	54.00	-23.09	29.70	1.21	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX b 2412MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

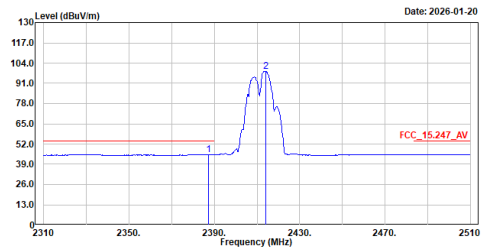


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.200	45.03	54.00	-8.97	14.66	30.37	Average
2	2414.200	98.84	-----	-----	68.54	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2412MHz
Test by :Bob Chiu

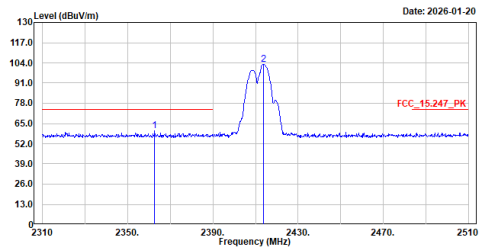


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2362.600	60.26	74.00	-13.74	29.95	30.31	Peak
2	2413.800	103.25	-----	-----	72.95	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Bob Chiu

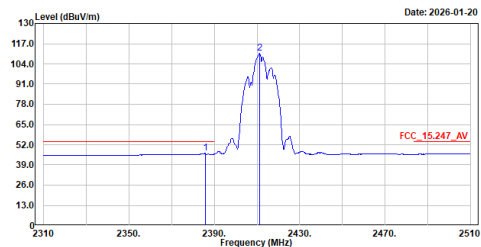


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2385.800	46.39	54.00	-7.61	16.02	30.37	Average
2	2411.200	110.64	-----	-----	80.35	30.29	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2412MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Bob Chiu

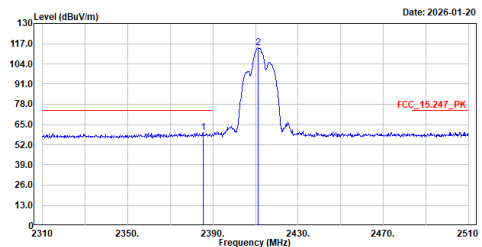


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2385.400	60.09	74.00	-13.91	29.72	30.37	Peak
2	2411.200	114.29	-----	-----	84.00	30.29	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

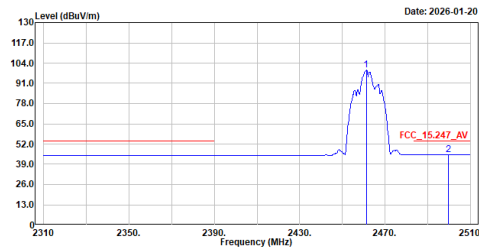


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	99.78	-----	-----	69.71	30.07	Average
2	2499.600	45.10	54.00	-8.90	14.91	30.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_b_2462MHz
Test by :Bob Chiu

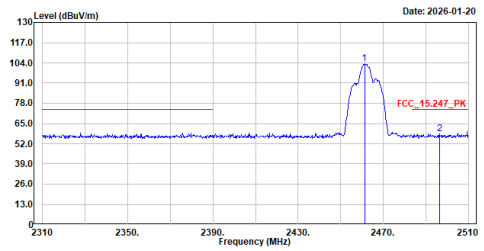


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	103.30	-----	-----	73.23	30.07	Peak
2	2496.400	58.55	74.00	-15.45	28.36	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

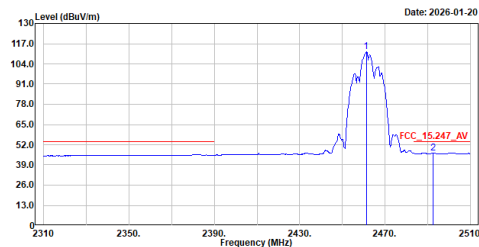


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	111.61	-----	-----	81.54	30.07	Average
2	2492.600	46.78	54.00	-7.22	16.59	30.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX b 2462MHz_V Peak


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Bob Chiu

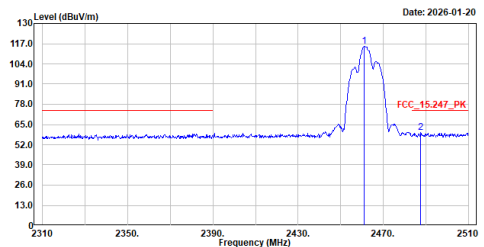

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	115.20	-----	-----	85.13	30.07	Peak
2	2487.400	60.01	74.00	-13.99	29.86	30.15	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

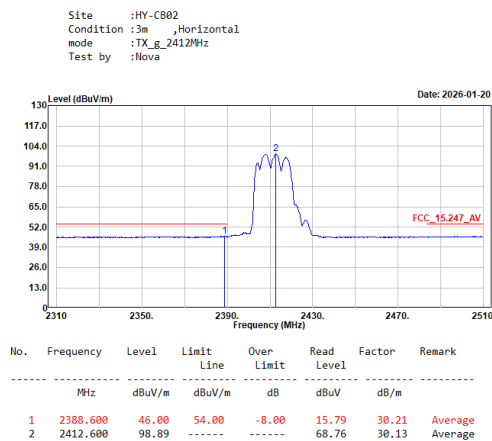


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

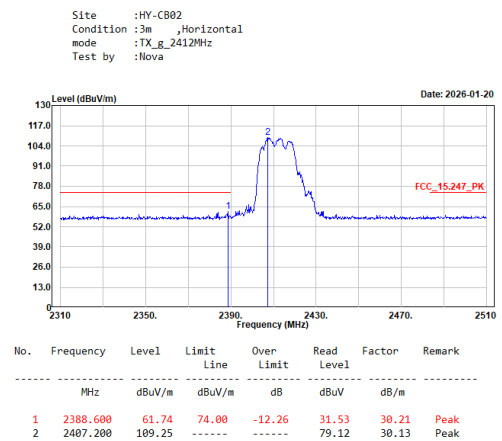


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

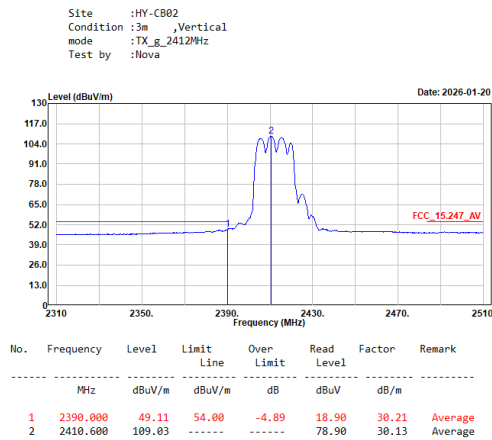


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

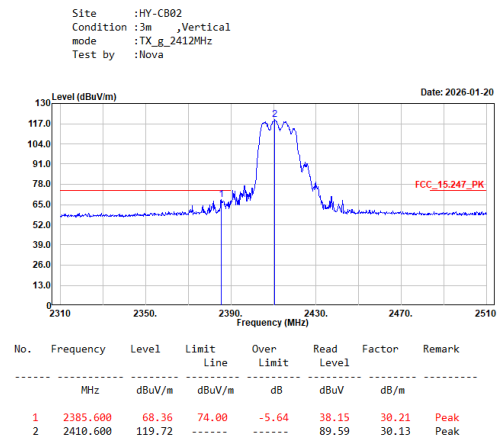


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

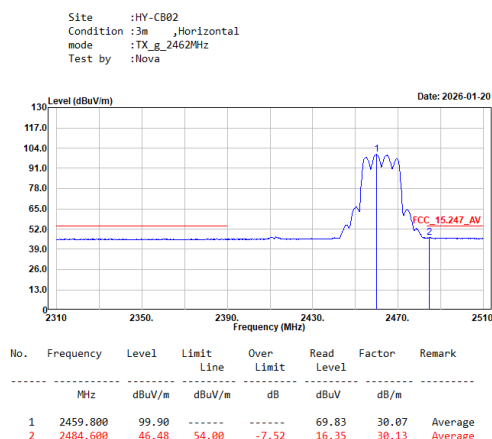


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

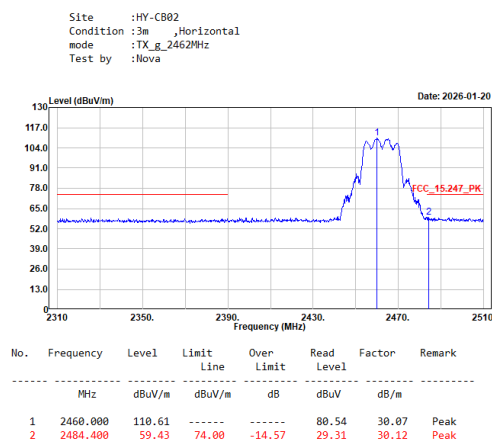


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

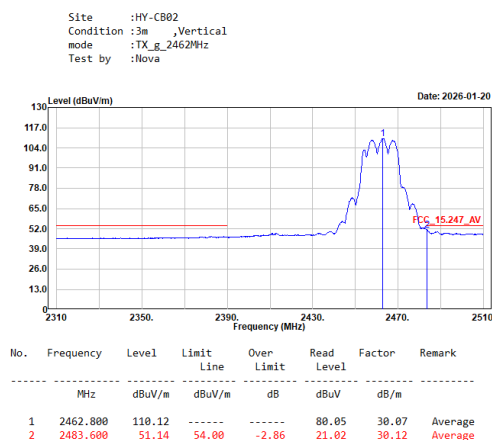


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

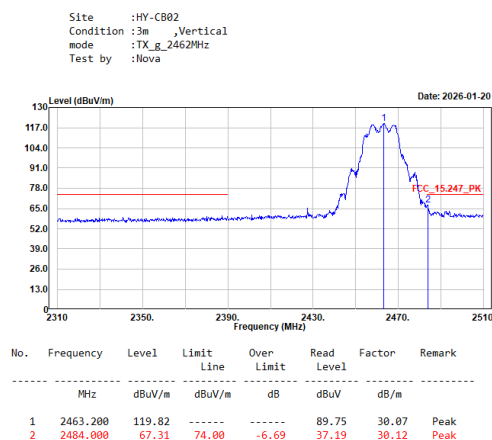


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Average

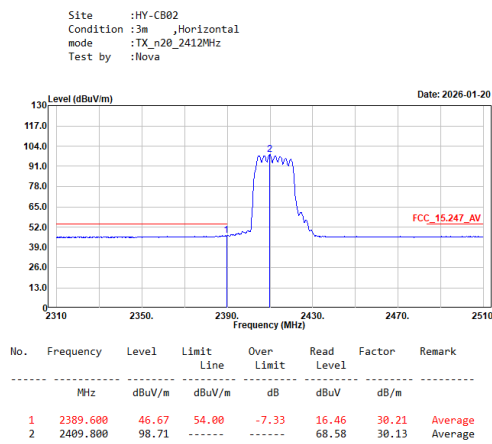


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Peak

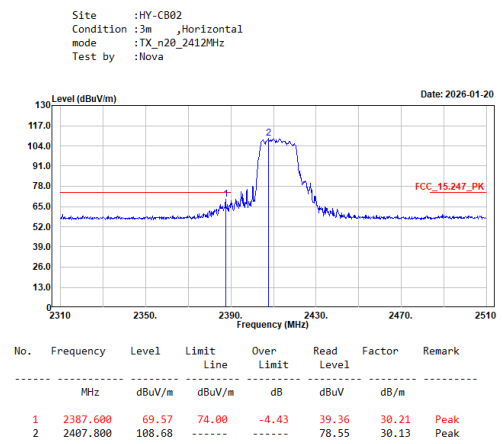


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Average

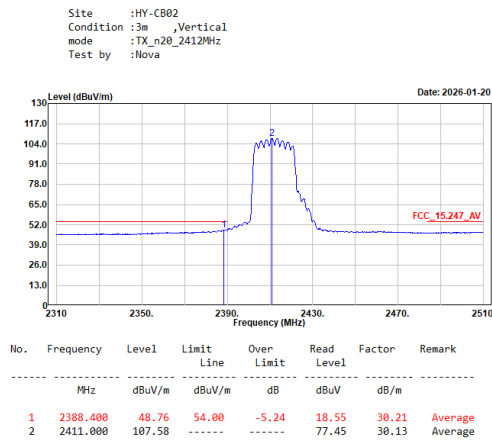

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n20_2412MHz_V_Peak

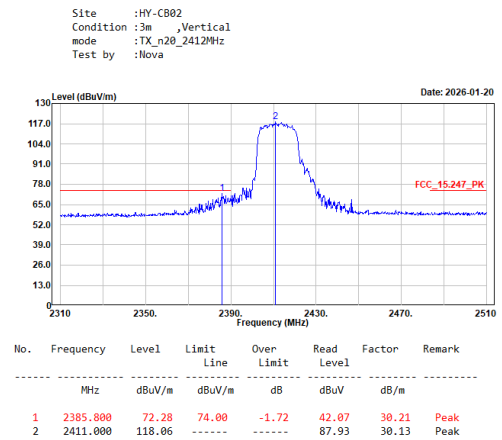

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Nova

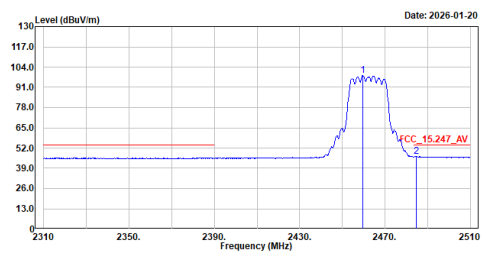


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.600	98.60	-----	-----	68.53	30.07	Average
2	2484.000	46.58	54.00	-7.42	16.45	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n20_2462MHz
Test by :Nova

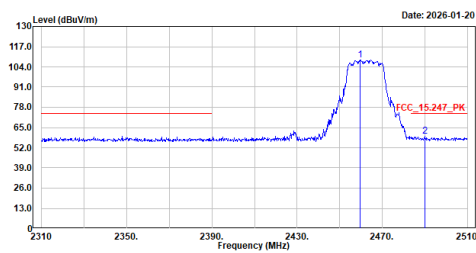


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.600	108.21	-----	-----	78.14	30.07	Peak
2	2490.000	59.20	74.00	-14.80	29.01	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Nova

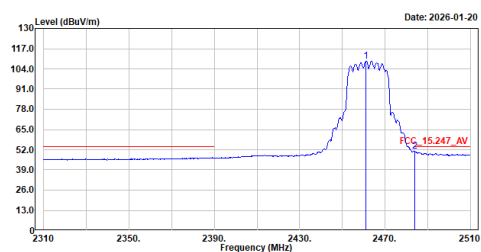


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	109.10	-----	-----	79.03	30.07	Average
2	2484.000	51.08	54.00	-2.92	20.96	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Nova

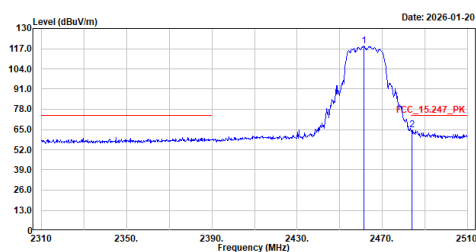


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	118.68	-----	-----	88.61	30.07	Peak
2	2484.000	64.58	74.00	-9.42	34.46	30.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Nova

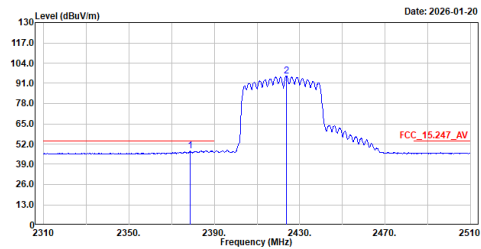


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2378.800	47.66	54.00	-6.34	17.46	30.20	Average
2	2423.800	95.67	-----	-----	65.53	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2422MHz
Test by :Nova

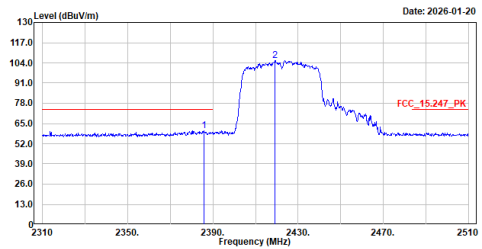


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.800	60.34	74.00	-13.66	30.13	30.21	Peak
2	2419.200	105.69	-----	-----	75.55	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Nova

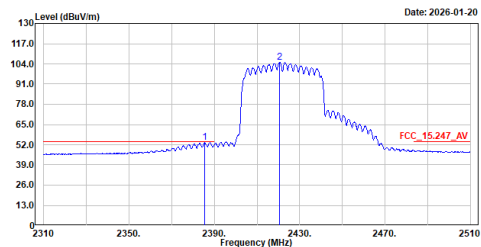


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.400	53.27	54.00	-0.73	23.06	30.21	Average
2	2420.600	105.18	-----	-----	75.04	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2422MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Nova

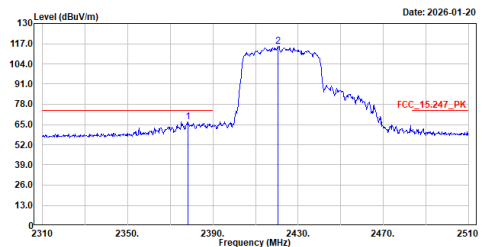


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2378.200	66.68	74.00	-7.32	36.50	30.18	Peak
2	2420.400	115.31	-----	-----	85.17	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

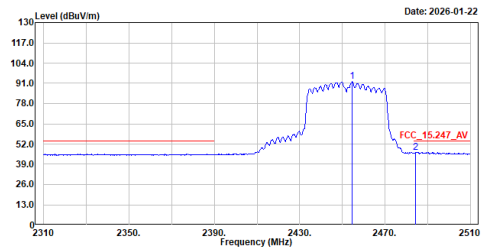


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.600	92.08	-----	-----	62.01	30.07	Average
2	2484.200	46.80	54.00	-7.20	16.68	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_n40_2452MHz
Test by :Bob Chiu

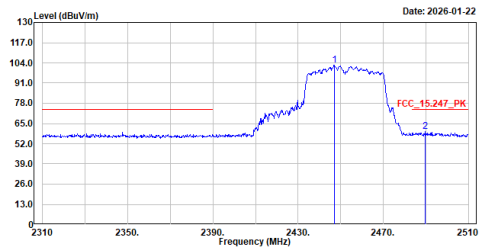


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2447.200	102.67	-----	-----	72.64	30.03	Peak
2	2489.800	59.76	74.00	-14.24	29.57	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Bob Chiu

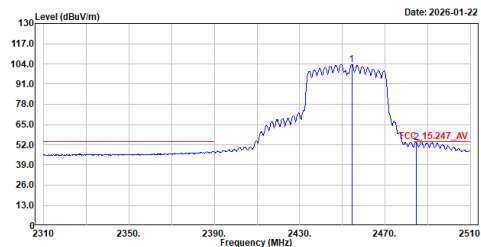


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2454.400	103.68	-----	-----	73.61	30.07	Average
2	2484.600	53.46	54.00	-0.54	23.33	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n40_2452MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Bob Chiu

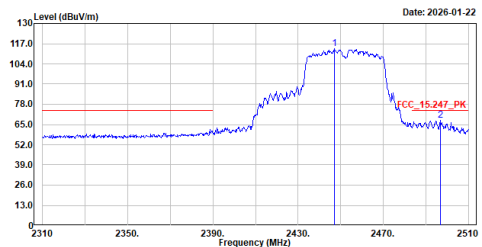


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2447.000	113.67	-----	-----	83.64	30.03	Peak
2	2496.800	67.83	74.00	-6.17	37.64	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2412MHz
Test by :Nova

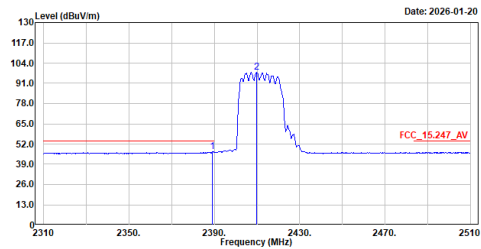


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2389.200	47.12	54.00	-6.88	16.91	30.21	Average
2	2409.800	98.13	-----	-----	68.00	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2412MHz
Test by :Nova

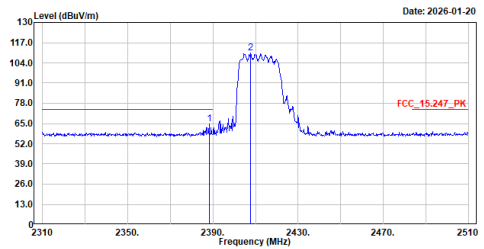


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.200	64.99	74.00	-9.01	34.78	30.21	Peak
2	2407.800	110.38	-----	-----	80.25	30.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2412MHz
Test by :Nova

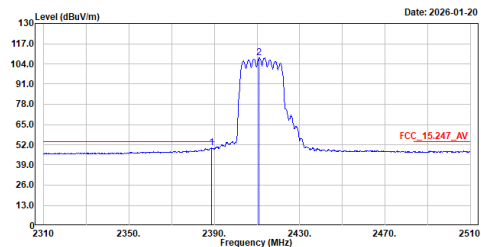


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2388.600	49.82	54.00	-4.18	19.61	30.21	Average
2	2411.000	108.13	-----	-----	78.00	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2412MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2412MHz
Test by :Nova

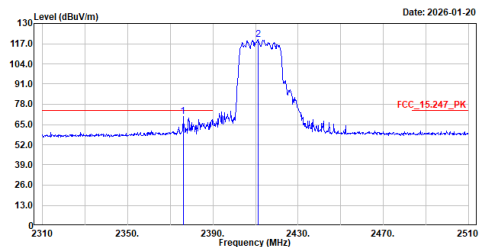


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2376.000	70.05	74.00	-3.95	39.89	30.16	Peak
2	2411.200	119.53	-----	-----	89.40	30.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2462MHz
Test by :Bob Chiu

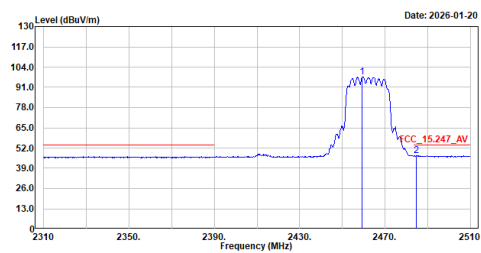


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.400	97.74	-----	-----	67.67	30.07	Average
2	2484.800	47.29	54.00	-6.71	17.16	30.13	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be20_2462MHz
Test by :Bob Chiu

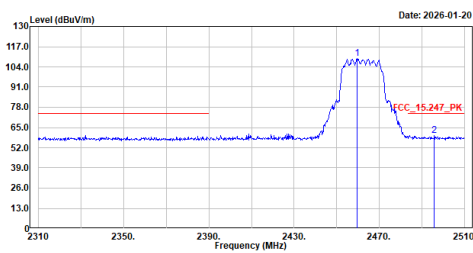


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.600	109.16	-----	-----	79.09	30.07	Peak
2	2495.800	59.89	74.00	-14.11	29.70	30.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

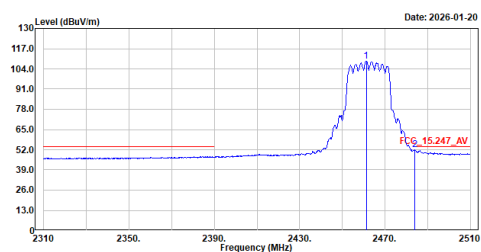


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	109.06	-----	-----	78.99	30.07	Average
2	2483.800	51.88	54.00	-2.12	21.76	30.12	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be20 2462MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be20_2462MHz
Test by :Bob Chiu

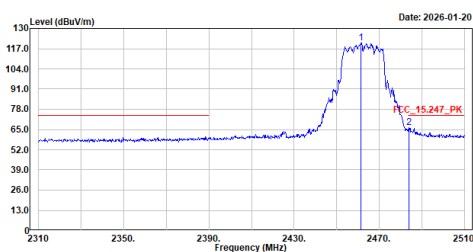


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.400	120.53	-----	-----	90.46	30.07	Peak
2	2483.800	66.13	74.00	-7.87	36.01	30.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

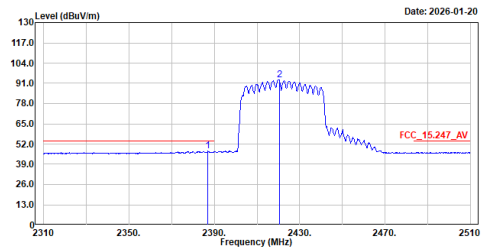


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2387.000	47.58	54.00	-6.42	17.37	30.21	Average
2	2420.400	93.21	-----	-----	63.07	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2422MHz
Test by :Bob Chiu

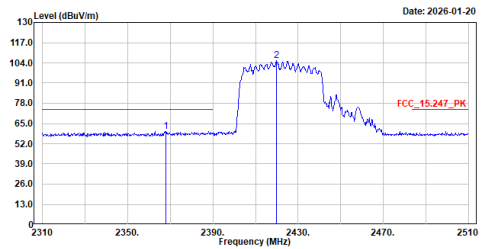


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2367.800	59.87	74.00	-14.13	29.75	30.12	Peak
2	2420.000	105.60	-----	-----	75.46	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu

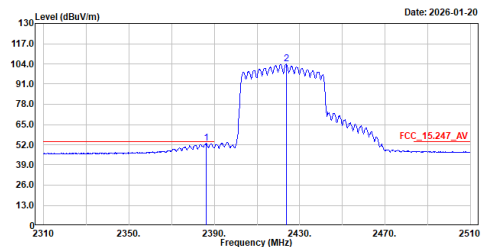


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2386.200	52.76	54.00	-1.24	22.55	30.21	Average
2	2423.800	103.81	-----	-----	73.67	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2422MHz V Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2422MHz
Test by :Bob Chiu

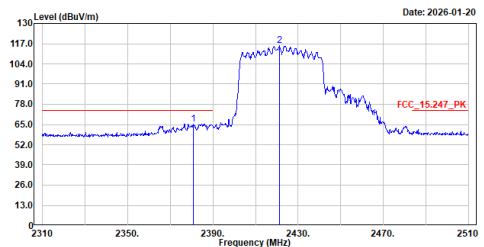


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2380.800	65.45	74.00	-8.55	35.24	30.21	Peak
2	2421.200	115.91	-----	-----	85.77	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

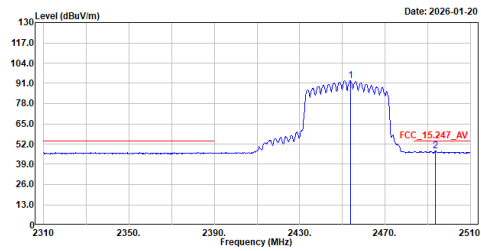


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.800	92.66	-----	-----	62.59	30.07	Average
2	2493.600	47.47	54.00	-6.53	17.28	30.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz H Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_be40_2452MHz
Test by :Bob Chiu

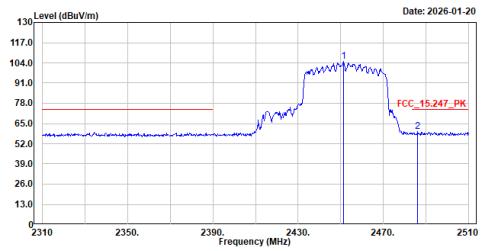


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2451.200	104.80	-----	-----	74.74	30.06	Peak
2	2486.200	60.08	74.00	-13.92	29.94	30.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz V Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu

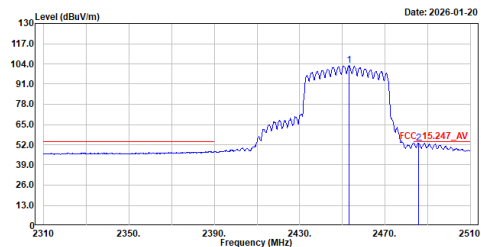


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.200	102.94	-----	-----	72.88	30.06	Average
2	2485.800	53.05	54.00	-0.95	22.91	30.14	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX be40 2452MHz V Peak


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_be40_2452MHz
Test by :Bob Chiu

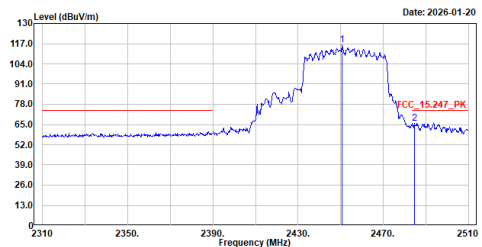

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.800	116.26	-----	-----	86.20	30.06	Peak
2	2484.600	65.79	74.00	-8.21	35.66	30.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

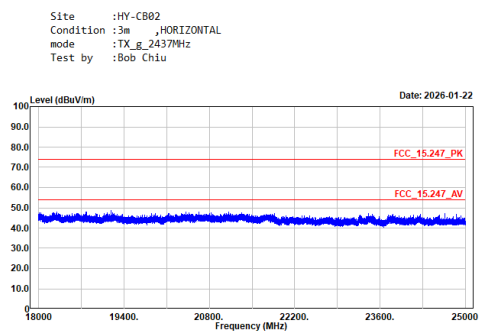

TX_g_2437MHz_V

