



RADIO TEST REPORT

FCC ID : TLZ-XM549
Equipment : IEEE 802.11 1X1 a/b/g/n/ac/ax Wireless LAN +
Bluetooth 5.3 + 802.15.4 Tri-radio 12 x 12 LGA Module
Brand Name : AzureWave
Model Name : AW-XM549 , AW-XM549-I , AW-XM553 , AW-XM553-I
Applicant : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei
City , Taiwan 231
Manufacturer : AzureWave Technologies, Inc.
8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei
City , Taiwan 231
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 16, 2022, and testing was started from Dec. 20, 2022 and completed on Dec. 26, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT.....	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration.....	14
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	17
3 Transmitter Test Result	20
3.1 AC Power-line Conducted Emissions	20
3.2 Maximum Output Power	22
3.3 Unwanted Emissions.....	25
4 Test Equipment and Calibration Data	29
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Maximum Output Power	
Appendix C. Test Results of Unwanted Emissions	
Appendix D. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 31
Issued Date : Jan. 20, 2026
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Maximum Output Power	PASS	-
3.3	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Vicky Huang

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]



Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.47-5.725GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.725-5.85GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	MAG. LAYERS	MSA-4008-25GC1-A2	PIFA Antenna	I-PEX	Note1
2	1	CEL	0032-02-07-00-001	PIFA Antenna	N/A	
3	1	Taoglas	FXP830.54.0250C	Dipole Antenna	I-PEX	
4	1	Taoglas	GW20.54.0400A.km	Dipole Antenna	I-PEX	
5	1	Taoglas	GW20.54.0180A.km	Dipole Antenna	I-PEX	

Note1:

Ant.	Gain (dBi)	
	WLAN 2.4GHz/Bluetooth/Thread	WLAN 5GHz
1	2.98	5.16
2	1.30	4.30
Ant.	WLAN 2.4GHz/Bluetooth	WLAN 5GHz
3	3.1	6.08
4	2.33	1.73
5	2.47	2.62

Note 2: The above information was declared by manufacturer.

Note 3: For the AC Power Port Conducted Emission test: The EUT has two types of antennas. Only the highest gain antenna from each type was selected for testing. Thus, Antenna 1 and Antenna 3 were selected to perform the test.

For the RF conducted test: The EUT has two types of antennas. Only the highest gain antenna from each type was selected for testing. Thus, Antenna 1 and Antenna 3 (only WLAN) were selected to perform the test.

For the radiated test: The EUT has two types of antennas. After evaluating, Antenna 1, Antenna 3 and Antenna 5 were selected to perform the test.

<For WLAN 2.4GHz function>**For IEEE 802.11b/g/n/VHT/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

<For WLAN 5GHz function>**For IEEE 802.11a/n/ac/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

<For Bluetooth function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

<For Thread function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**1.1.3 Test Mode of Partial RU**

Mode	Partial RU		
802.11ax HEW20	26	52	106
802.11ax HEW40	242		
802.11ax HEW80	65	66	484

1.1.4 Mode Test Duty Cycle**<Full RU>**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.865	0.63	1.433m	1k
802.11ax HEW20_Nss 1,(M0)	0.944	0.25	3.902m	300
802.11ax HEW40_Nss 1,(M0)	0.891	0.5	1.98m	1k
802.11ax HEW80_Nss 1,(M0)	0.81	0.92	977.5u	2k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.5 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☐	With beamforming	☒	Without beamforming
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☐	Indoor P2M
	☐	Fixed P2P	☒	Client
	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☐	Supported Static Puncturing		
	☐	Supported Dynamic Puncturing (Reduce BW)		
	☒	Unsupported		
Support RU	☒	Full RU	☒	Partial RU
Test Software Version	DutApiMimoApApp.exe(V2.0.0.35)			

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Model Name	Description
AW-XM549	All the models are identical, the difference model served as marketing strategy.
AW-XM549-I	
AW-XM553	
AW-XM553-I	

Note 1: From the above models, model: AW-XM549 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.7 Table for EUT Information

EUT	Hardware Version	Description
1	01H	The difference between 01H and 02H is the layout of DC-DC power. All RF layouts are the same.
2	02H	

Note: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR2O0715AB

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Add three sets of dipole antennas of a different type from the original application, with both higher and lower gain only for WLAN and Bluetooth function.	1. AC Power-line Conducted Emissions 2. Maximum Output Power (Only 802.11a 5180MHz/5320MHz/5500MHz, 802.11ax HEW20 5180MHz/5320MHz/5500MHz, 802.11ax HEW40 5190MHz/5230MHz/5310MHz /5510MHz/5550MHz/5670MHz/5795MHz and 802.11ax HEW80 5210MHz/5290MHz/5530MHz /5610MHz/5690MHz were retested. Other test modes and frequencies were based on the original test results.) 3. Unwanted Emissions
2. Update the reference standard to "ANSI C63.10-2020" from "ANSI C63.10-2013".	It does not affect the test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For others)	TH01-CB	Sean Ku	22.4~22.6 / 52~59	Dec. 20, 2022~ Jan. 18, 2023
RF Conducted (For 802.11a 5180MHz/5320MHz/5500MHz, 802.11ax HEW20 5180MHz/5320MHz/5500MHz, 802.11ax HEW40 5190MHz/5230MHz/5310MHz/5510MHz/5550MHz/ 5670MHz/5795MHz and 802.11ax HEW80 5210MHz/5290MHz/5530MHz/5610MHz/5690MHz)	TH01-CB	Serway Lee	23.4~25.1 / 57~61	Sep. 12, 2025~ Sep. 25, 2025
Radiated (Below 1GHz)	03CH05-CB	Chris Li	21.5~22.9 / 57~60	Nov. 14, 2025~ Dec. 11, 2025
Radiated (Above 1GHz)	03CH03-CB	Chris Li	21.6~23.1 / 58~62	Aug. 25, 2025~ Sep. 10, 2025
	03CH06-CB		21.9~23.1 / 60~62	
AC Conduction	CO01-CB	Tim Chen	22~23 / 54~55	Dec. 26, 2025

Note: The tested sample of the Antenna 3~5 test item was received on Jul. 25, 2025

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

For test date before Jun. 01, 2023

Test Items	Uncertainty	Remark
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%

**For test date after May 27, 2025**

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

<Full RU>

Mode
802.11a_Nss1,(6Mbps)_1TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW20_Nss1,(MCS0)_1TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40_Nss1,(MCS0)_1TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz



802.11ax HEW80_Nss1,(MCS0)_1TX
5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz

Note:

- ♦ Evaluated HEW20/HEW40/HEW80 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 mode are the same or lower than HEW20/HEW40/HEW80.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
There are two modes of EUT, one is WLAN 2.4GHz + Bluetooth Mode, the other is WLAN 5GHz + Bluetooth Mode. After evaluating, WLAN 5GHz + Bluetooth Mode has been evaluated to be the worst case, thus measurement will follow this same test configuration.	
1	EUT 2 + WLAN 5GHz + Bluetooth + Antenna 3
2	EUT 1 + WLAN 5GHz + Bluetooth + Antenna 3
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Output Power
Test Condition	Conducted measurement at transmit chains
1	EUT 2 - Full RU + Antenna 3

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1. After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report. 2. There are two modes of EUT, one is WLAN 2.4GHz + Bluetooth Mode, the other is WLAN 5GHz + Bluetooth Mode. After evaluating, WLAN 5GHz + Bluetooth Mode has been evaluated to be the worst case, thus measurement will follow this same test configuration.	
1	EUT 2 in Z axis + WLAN 5GHz + Bluetooth + Antenna 3
2	EUT 2 in Z axis + WLAN 5GHz + Bluetooth + Antenna 5
3	EUT 1 in Z axis + WLAN 5GHz + Bluetooth + Antenna 3
4	EUT 1 in Z axis + WLAN 5GHz + Bluetooth + Antenna 5
For operating mode 3 is the worst case and it was record in this test report.	



Operating Mode > 1GHz	CTX
After evaluating, and the worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.	
1	EUT 2 in Z axis - Full RU + Antenna 3
2	EUT 2 in Z axis - Full RU + Antenna 5

Note: The WLAN and Bluetooth function can't work at the same time.

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	EUT NB	DELL	P39F	N/A
B	Earphone	e-Power	GT-02	N/A
C	Mouse	Acer	MOJFUO	N/A
D	Test Fixture 1	Azurewave	2549-I4	N/A
E	Test Fixture 2	Azurewave	9007-I12	N/A
F	AP Router	TP-LINK	Archer C54	TE7C54
G	Smart Phone	Samsung	Galaxy J2	A3LSMJ200Y
H	AP Router NB	DELL	E6430	N/A
I	Adapter	DELL	LA65NM130	N/A

**For Radiated (below 1GHz):**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	P39F	N/A
B	Test Fixture 2	Azurewave	9007-I12	N/A
C	Test Fixture 1	Azurewave	2549-I4	N/A
D	NB	DELL	E6430	N/A
E	WLAN AP(WIFI 5G)	ASUS	RT-AX88U	MSQ-RTAXHP00
F	iPhone 12(BT)	Apple	A2403	BCG-E3544A
G	Mouse	Logitech	M-U0026	N/A
H	Earphone	SHYARO CHI	MIC-04	N/A

For Radiated (above 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	P39F	N/A
B	Test Fixture 2	Azurewave	9007-I12	N/A
C	Test Fixture 1	Azurewave	2549-I4	N/A
D	NB	DELL	E4300	N/A


For RF Conducted (For others):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	ACER	E4730	N/A
B	Notebook	DELL	E4300	N/A
C	Test Fixture 3	Azurewave	2510-I1	N/A

For RF Conducted (For 802.11a 5180MHz/5320MHz/5500MHz, 802.11ax HEW20 5180MHz/5320MHz/5500MHz, 802.11ax HEW40 5190MHz/5230MHz/5310MHz/5510MHz/5550MHz/5670MHz/5795MHz and 802.11ax HEW80 5210MHz/5290MHz/5530MHz/5610MHz/5690MHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	ACER	E4730	N/A
B	Notebook	DELL	E4300	N/A
C	Test Fixture 2	Azurewave	9007-I12	N/A
D	Test Fixture 1	Azurewave	2549-I4	N/A

2.6 Test Setup Diagram

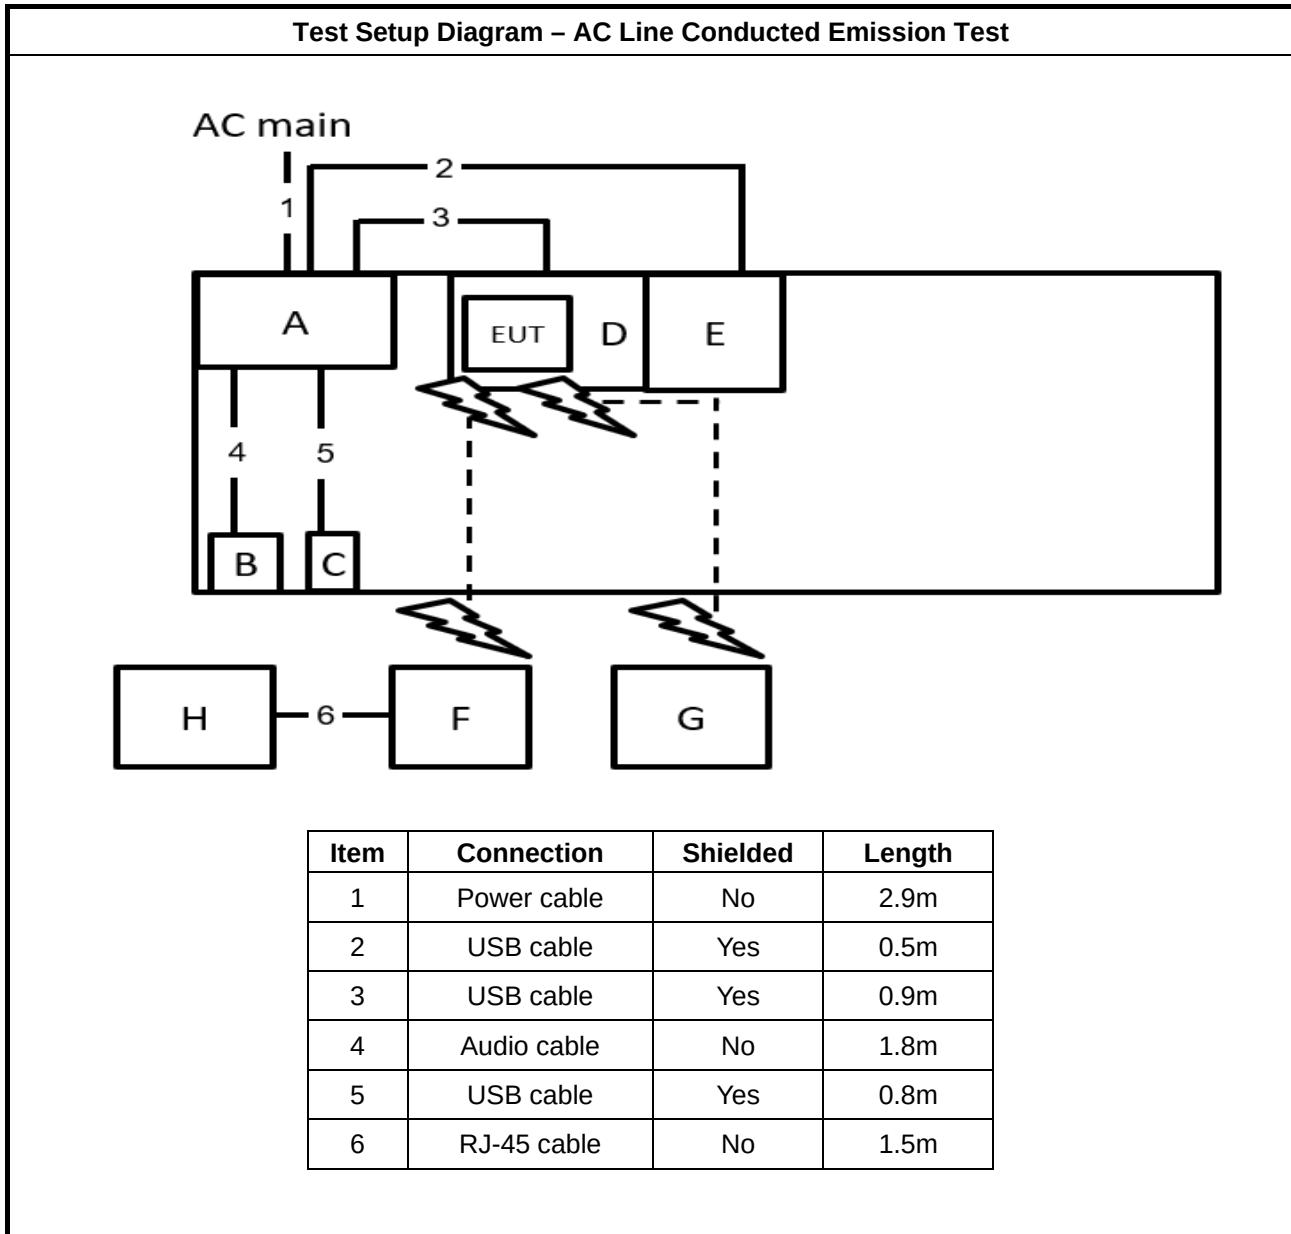

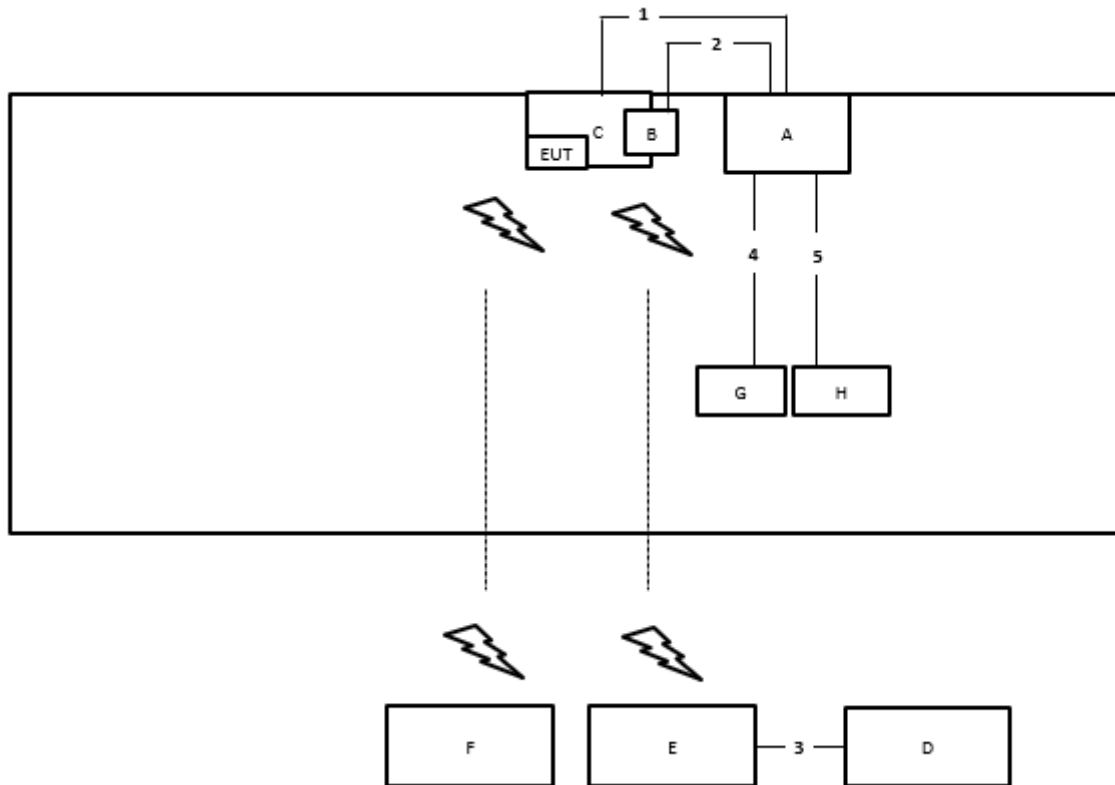Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	USB to Micro cable	Yes	1m
2	USB to Micro cable	Yes	1m
3	RJ-45 cable	No	10m
4	USB cable	Yes	1m
5	Audio cable	No	1m

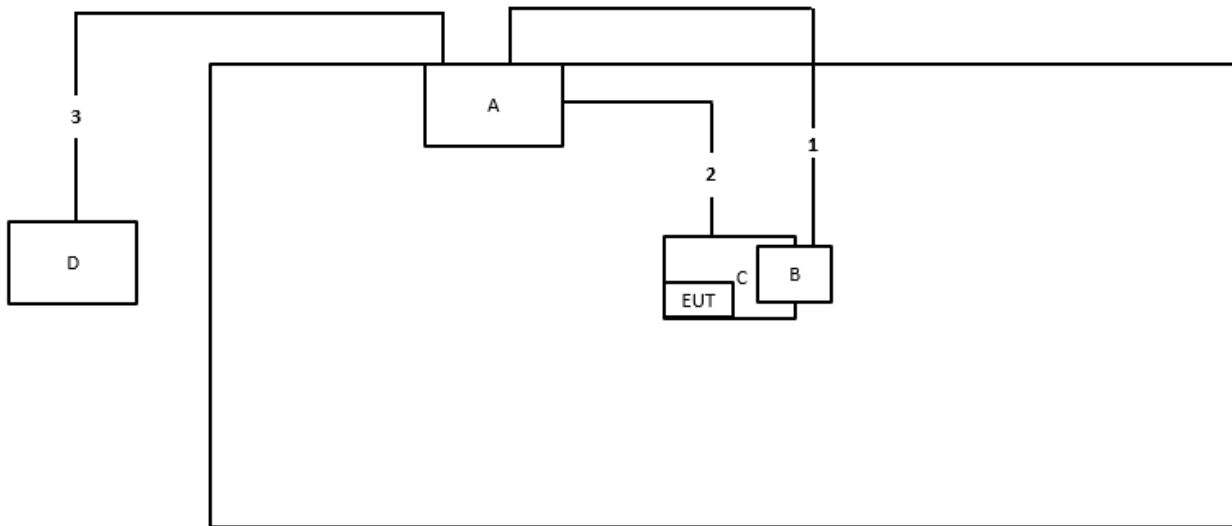Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	USB to Micro cable	Yes	1m
2	USB to Micro cable	Yes	1m
3	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

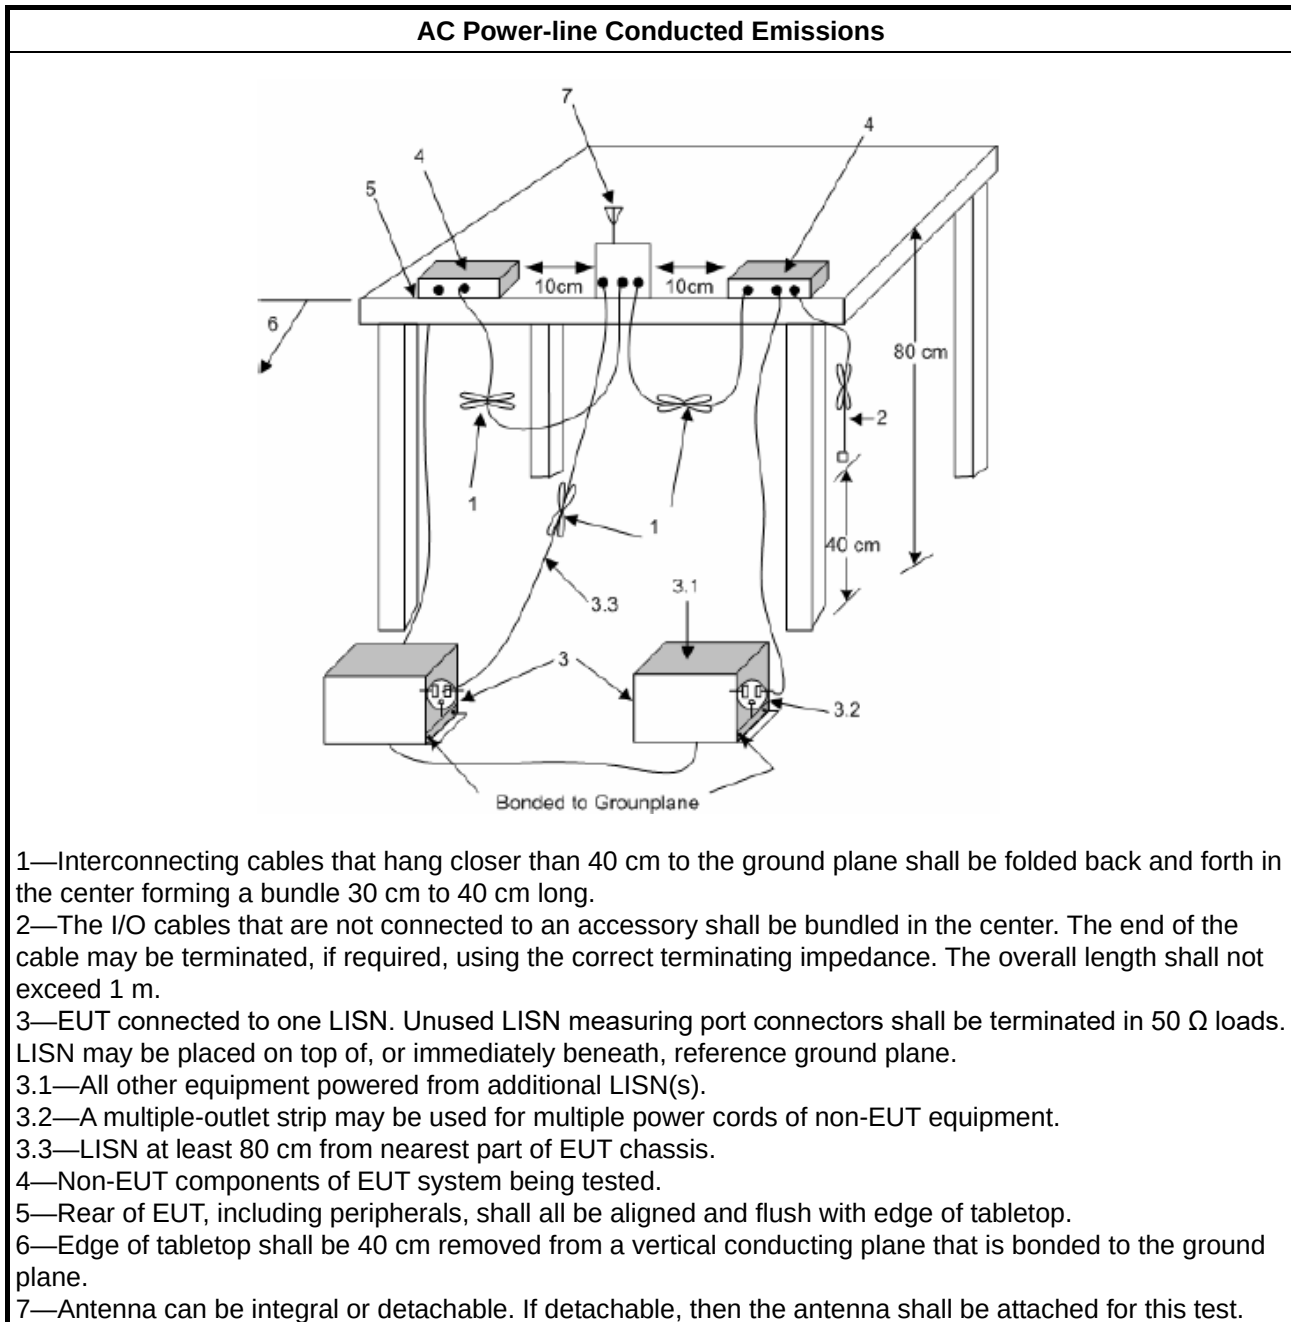

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



3.2 Maximum Output Power

3.2.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
☐	- For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
☐	- For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐ For the 5.47-5.725 GHz band:	



	- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐	For the 5.725-5.85 GHz band:
	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
Maximum Output Power	
	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.2.4 Test Setup

For straddle channels:

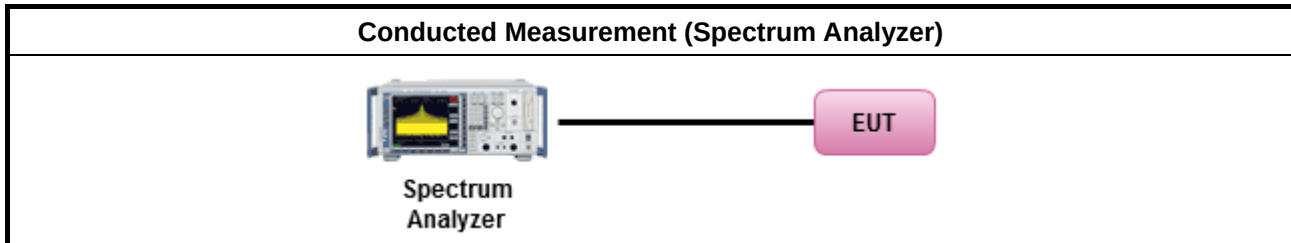

For others channel:

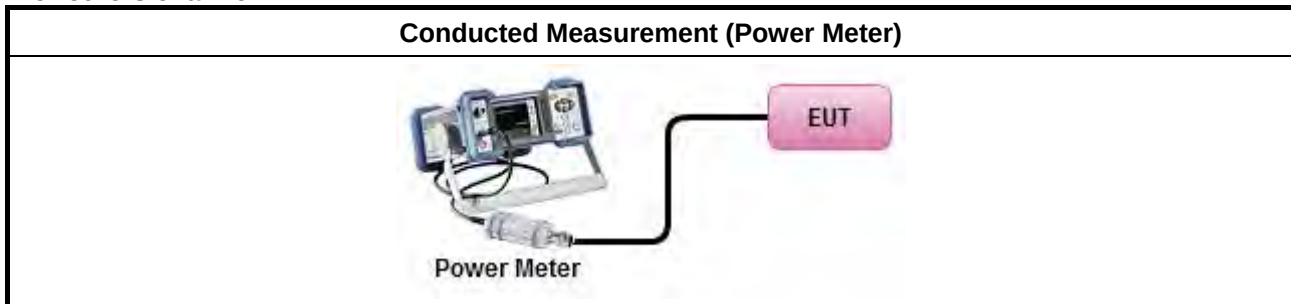

3.2.5 Test Result of Maximum Output Power

Refer as Appendix B



3.3 Unwanted Emissions

3.3.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.3.4 Test Setup

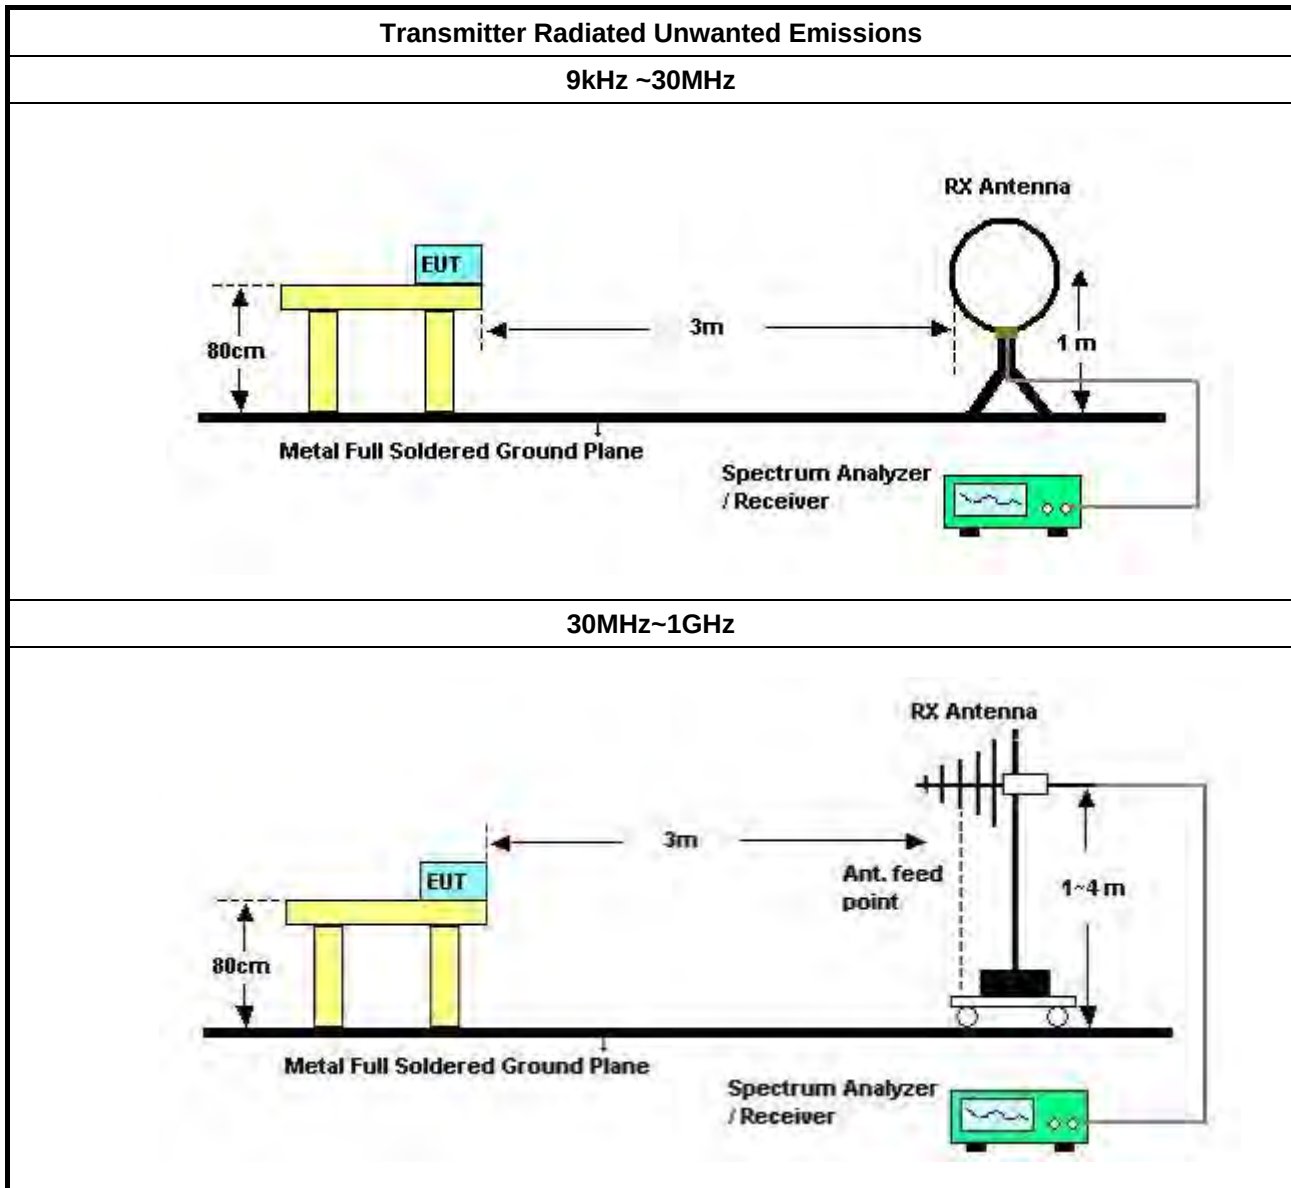

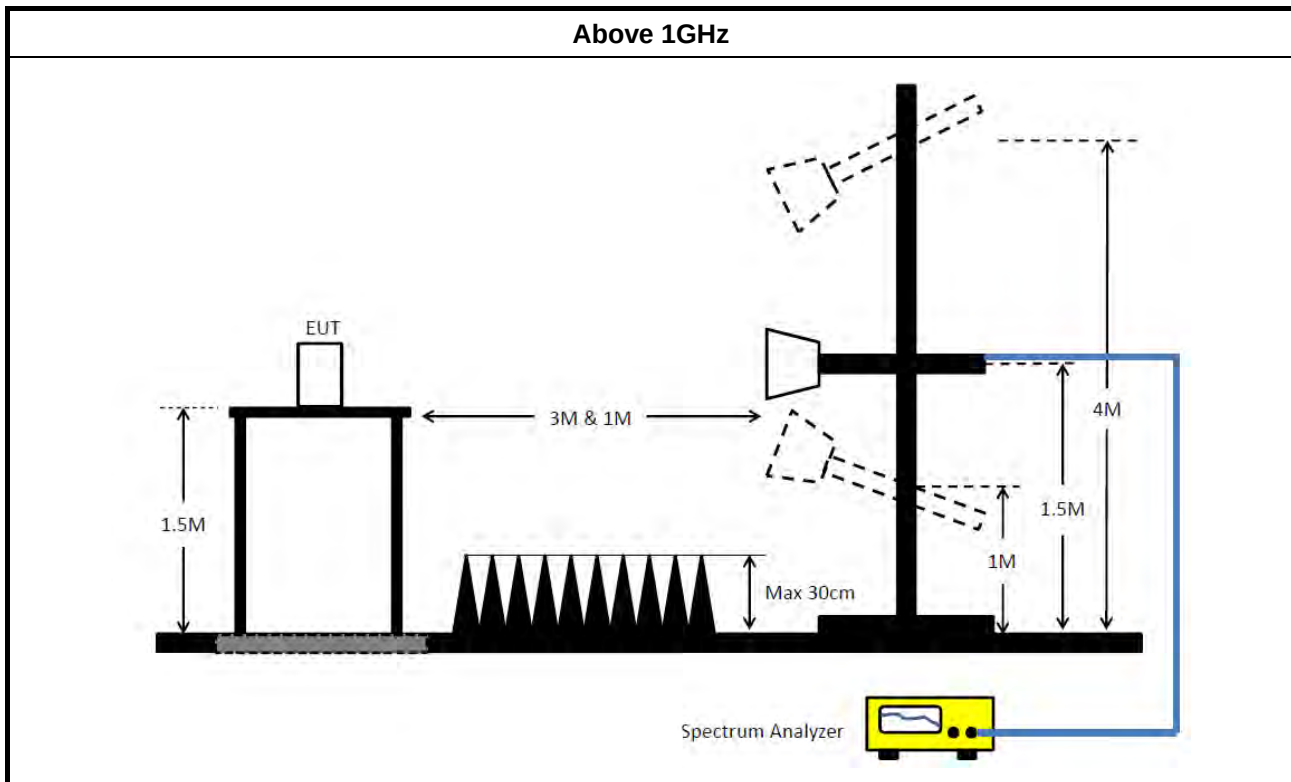

3.3.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.3.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.3.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix C



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Jul. 31, 2025	Jul. 30, 2026	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 22, 2025	Mar. 21, 2026	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 01, 2025	Apr. 30, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102171	9kHz ~ 7GHz	Aug. 04, 2025	Aug. 03, 2026	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 20, 2025	Feb. 19, 2026	Radiation (03CH03-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH03-CB)



Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 17, 2025	Jul. 16, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 08, 2024	Oct. 07, 2025	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Apr. 30, 2025	Apr. 29, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2022	May 26, 2023	Conducted (TH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2025	May 26, 2026	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1 GHz ~26.5 GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)



RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 22, 2023	Feb. 21, 2024	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 22, 2023	Feb. 21, 2024	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	528k	27.37	46.00	-18.63	Neutral

Mode 1

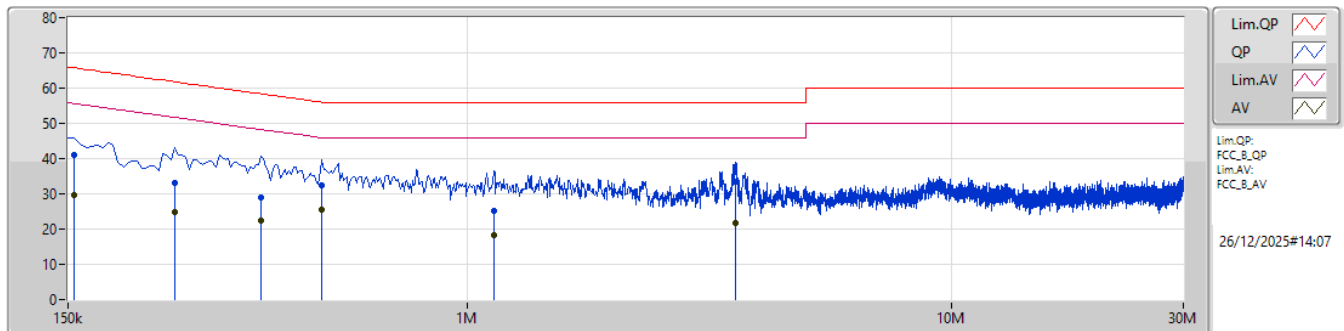

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	41.04	65.75	-24.71	10.00	Line	-	31.04	0.05	0.09	9.86						
AV	154.5k	29.57	55.75	-26.18	10.00	Line	-	19.57	0.05	0.09	9.86						
QP	249k	32.94	61.79	-28.85	9.94	Line	-	23.00	0.06	0.08	9.80						
AV	249k	24.76	51.79	-27.03	9.94	Line	-	14.82	0.06	0.08	9.80						
QP	375k	28.93	58.39	-29.46	10.05	Line	-	18.88	0.05	0.11	9.89						
AV	375k	22.25	48.39	-26.14	10.05	Line	-	12.20	0.05	0.11	9.89						
QP	500k	32.29	56.00	-23.71	10.09	Line	-	22.20	0.06	0.13	9.90						
AV	500k	25.36	46.00	-20.64	10.09	Line	"Worst"	15.27	0.06	0.13	9.90						
QP	1.136M	25.12	56.00	-30.88	10.09	Line	-	15.03	0.08	0.15	9.86						
AV	1.136M	18.11	46.00	-27.89	10.09	Line	-	8.02	0.08	0.15	9.86						
QP	3.579M	33.56	56.00	-22.44	10.02	Line	-	23.54	0.12	0.14	9.76						
AV	3.579M	21.57	46.00	-24.43	10.02	Line	-	11.55	0.12	0.14	9.76						

Mode 1

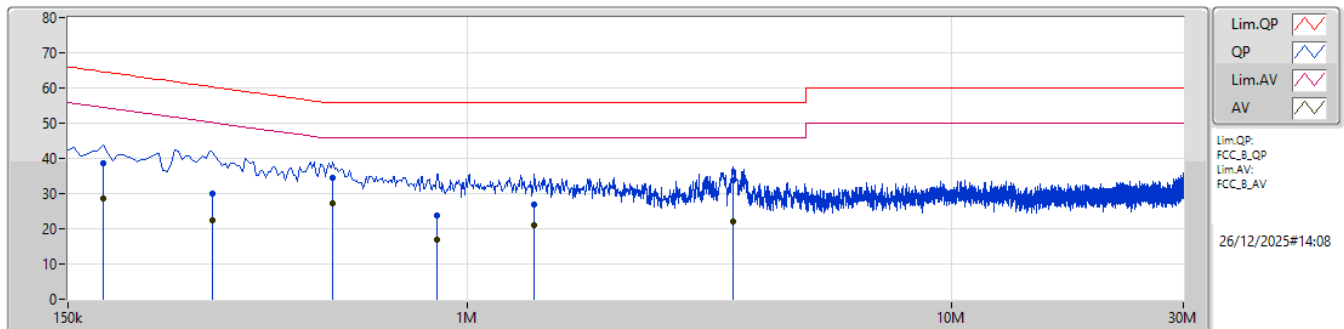

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	177k	38.66	64.62	-25.96	9.97	Neutral	-	28.69	0.08	0.08	9.81						
AV	177k	28.72	54.62	-25.90	9.97	Neutral	-	18.75	0.08	0.08	9.81						
QP	298.5k	29.83	60.28	-30.45	10.01	Neutral	-	19.82	0.08	0.09	9.84						
AV	298.5k	22.47	50.28	-27.81	10.01	Neutral	-	12.46	0.08	0.09	9.84						
QP	528k	34.58	56.00	-21.42	10.11	Neutral	-	24.47	0.08	0.13	9.90						
AV	528k	27.37	46.00	-18.63	10.11	Neutral	"Worst"	17.26	0.08	0.13	9.90						
QP	865.5k	23.91	56.00	-32.09	10.13	Neutral	-	13.78	0.09	0.15	9.89						
AV	865.5k	17.05	46.00	-28.95	10.13	Neutral	-	6.92	0.09	0.15	9.89						
QP	1.374M	27.04	56.00	-28.96	10.07	Neutral	-	16.97	0.10	0.15	9.82						
AV	1.374M	20.88	46.00	-25.12	10.07	Neutral	-	10.81	0.10	0.15	9.82						
QP	3.53M	33.76	56.00	-22.24	10.05	Neutral	-	23.71	0.15	0.14	9.76						
AV	3.53M	22.04	46.00	-23.96	10.05	Neutral	-	11.99	0.15	0.14	9.76						

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	20.07	0.10162
802.11ax HEW20_Nss1,(MCS0)_1TX	20.99	0.12560
802.11ax HEW40_Nss1,(MCS0)_1TX	19.93	0.09840
802.11ax HEW80_Nss1,(MCS0)_1TX	5.91	0.00390
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	19.81	0.09572
802.11ax HEW20_Nss1,(MCS0)_1TX	19.99	0.09977
802.11ax HEW40_Nss1,(MCS0)_1TX	20.04	0.10093
802.11ax HEW80_Nss1,(MCS0)_1TX	10.70	0.01175
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	20.50	0.11220
802.11ax HEW20_Nss1,(MCS0)_1TX	20.78	0.11967
802.11ax HEW40_Nss1,(MCS0)_1TX	20.06	0.10139
802.11ax HEW80_Nss1,(MCS0)_1TX	18.05	0.06383
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	20.92	0.12359
802.11ax HEW20_Nss1,(MCS0)_1TX	21.33	0.13583
802.11ax HEW40_Nss1,(MCS0)_1TX	20.05	0.10116
802.11ax HEW80_Nss1,(MCS0)_1TX	17.85	0.06095

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	6.08	17.97	17.97	23.90
5200MHz	Pass	6.08	20.07	20.07	23.90
5240MHz	Pass	6.08	19.71	19.71	23.90
5260MHz	Pass	6.08	19.70	19.70	23.90
5300MHz	Pass	6.08	19.81	19.81	23.90
5320MHz	Pass	6.08	14.48	14.48	23.75
5500MHz	Pass	6.08	16.25	16.25	23.78
5580MHz	Pass	6.08	20.50	20.50	23.90
5700MHz	Pass	6.08	16.94	16.94	23.90
5720MHz Straddle 5.47-5.725GHz	Pass	6.08	19.18	19.18	23.90
5720MHz Straddle 5.725-5.85GHz	Pass	6.08	12.89	12.89	29.92
5745MHz	Pass	6.08	20.92	20.92	29.92
5785MHz	Pass	6.08	20.71	20.71	29.92
5825MHz	Pass	6.08	20.31	20.31	29.92
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	6.08	16.52	16.52	23.90
5200MHz	Pass	6.08	20.99	20.99	23.90
5240MHz	Pass	6.08	19.91	19.91	23.90
5260MHz	Pass	6.08	19.91	19.91	23.90
5300MHz	Pass	6.08	19.99	19.99	23.90
5320MHz	Pass	6.08	16.92	16.92	23.90
5500MHz	Pass	6.08	15.18	15.18	23.90
5580MHz	Pass	6.08	20.78	20.78	23.90
5700MHz	Pass	6.08	15.26	15.26	23.90
5720MHz Straddle 5.47-5.725GHz	Pass	6.08	19.28	19.28	23.90
5720MHz Straddle 5.725-5.85GHz	Pass	6.08	13.84	13.84	29.92
5745MHz	Pass	6.08	21.33	21.33	29.92
5785MHz	Pass	6.08	21.13	21.13	29.92
5825MHz	Pass	6.08	20.78	20.78	29.92
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	6.08	7.41	7.41	23.90
5230MHz	Pass	6.08	19.93	19.93	23.90
5270MHz	Pass	6.08	20.04	20.04	23.90
5310MHz	Pass	6.08	14.49	14.49	23.90
5510MHz	Pass	6.08	13.96	13.96	23.90
5550MHz	Pass	6.08	18.15	18.15	23.90
5670MHz	Pass	6.08	18.76	18.76	23.90
5710MHz Straddle 5.47-5.725GHz	Pass	6.08	20.06	20.06	23.90
5710MHz Straddle 5.725-5.85GHz	Pass	6.08	10.29	10.29	29.92
5755MHz	Pass	6.08	20.05	20.05	29.92
5795MHz	Pass	6.08	19.48	19.48	29.92
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	6.08	5.91	5.91	23.90
5290MHz	Pass	6.08	10.70	10.70	23.90



Average Power

Appendix B

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
5530MHz	Pass	6.08	13.83	13.83	23.90
5610MHz	Pass	6.08	17.35	17.35	23.90
5690MHz Straddle 5.47-5.725GHz	Pass	6.08	18.05	18.05	23.90
5690MHz Straddle 5.725-5.85GHz	Pass	6.08	5.04	5.04	29.92
5775MHz	Pass	6.08	17.85	17.85	29.92


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

18/01/2023

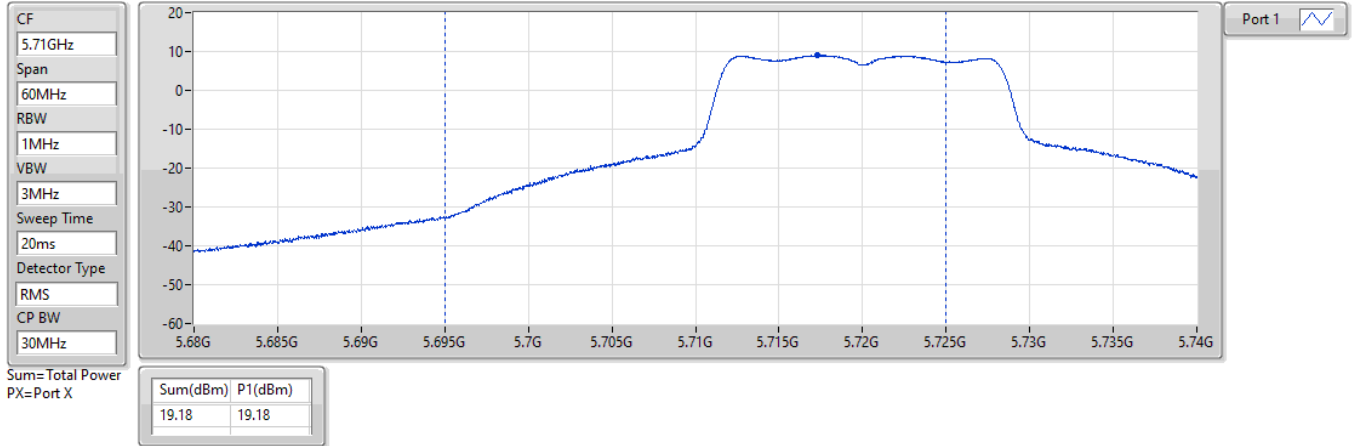


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

18/01/2023

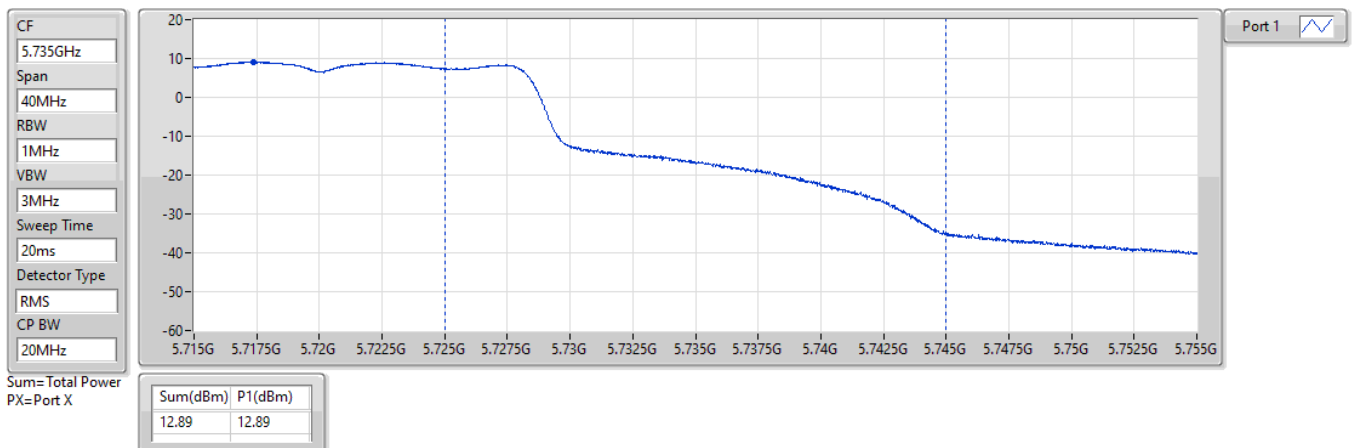


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

18/01/2023

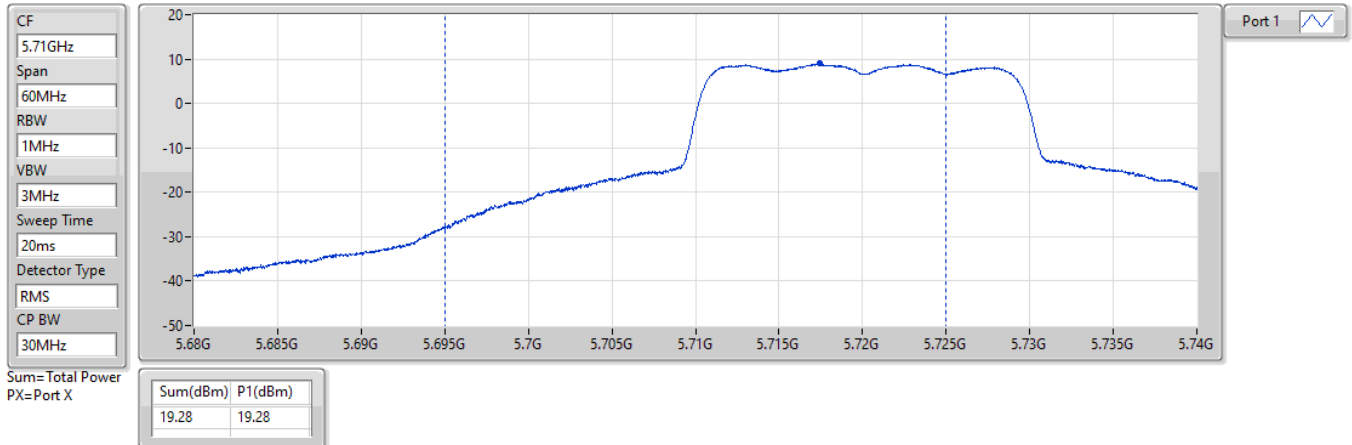


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

18/01/2023

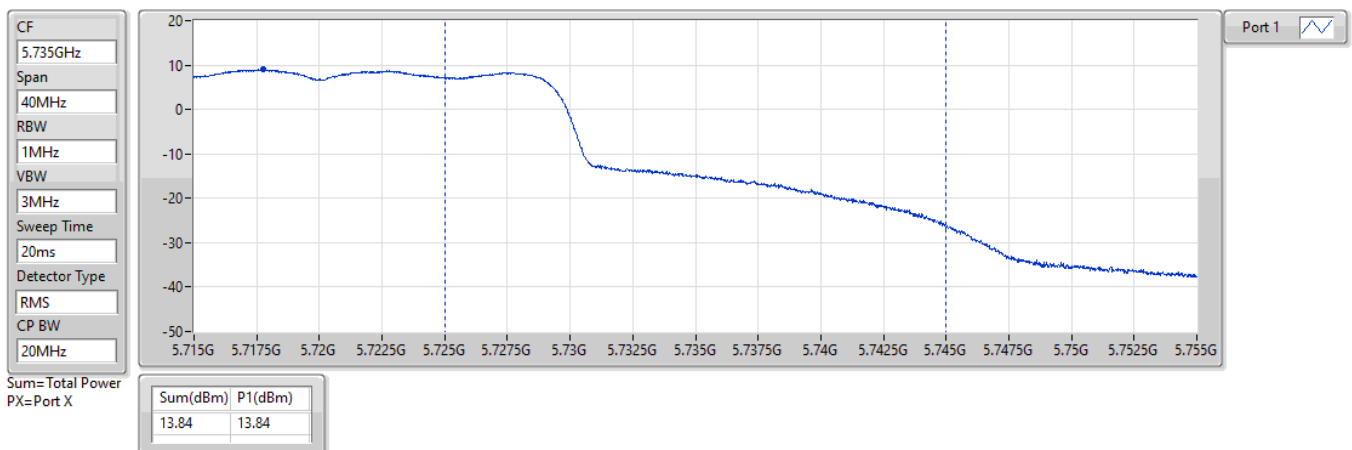


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

18/01/2023

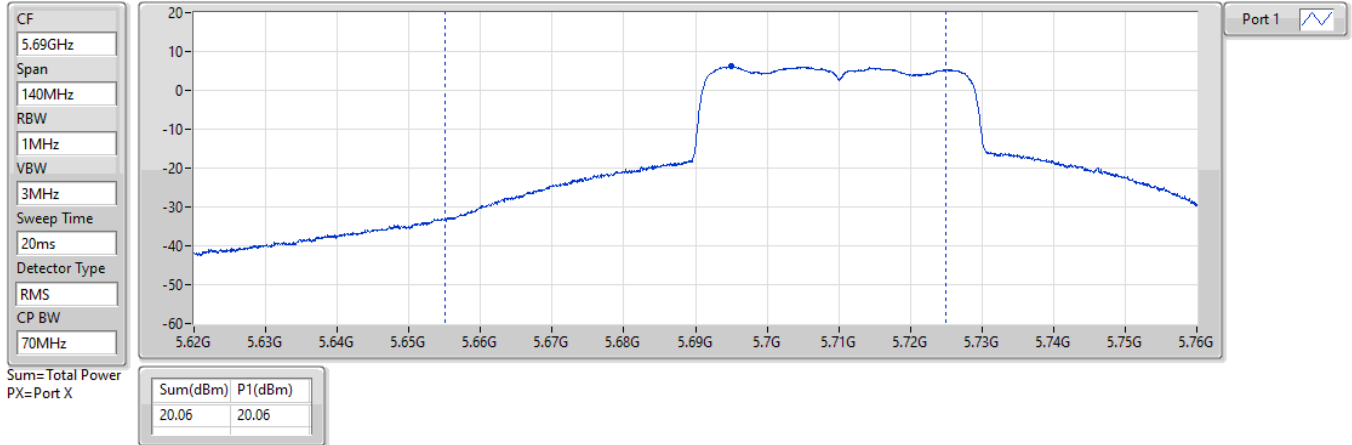


5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX


18/01/2023

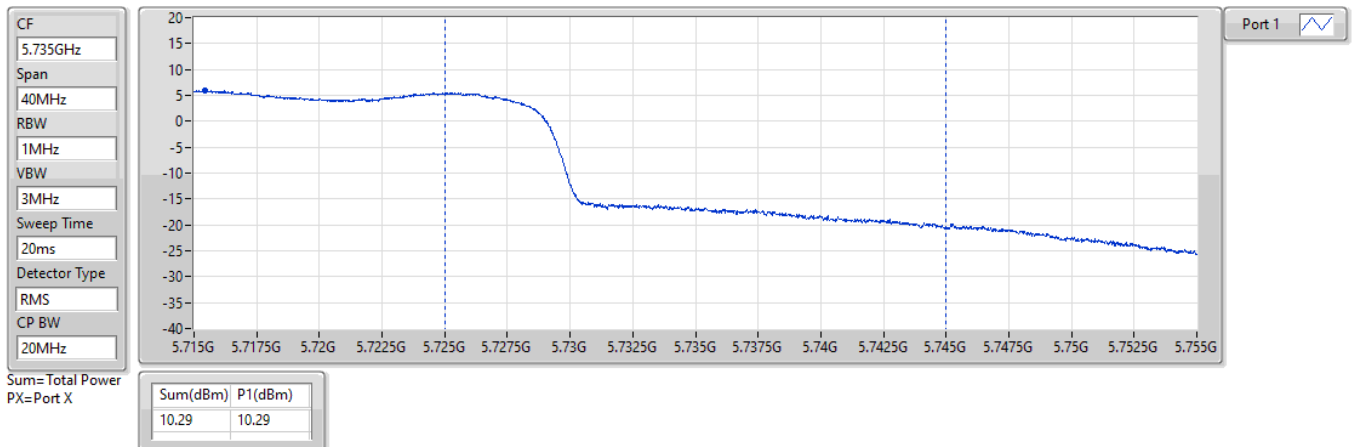

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

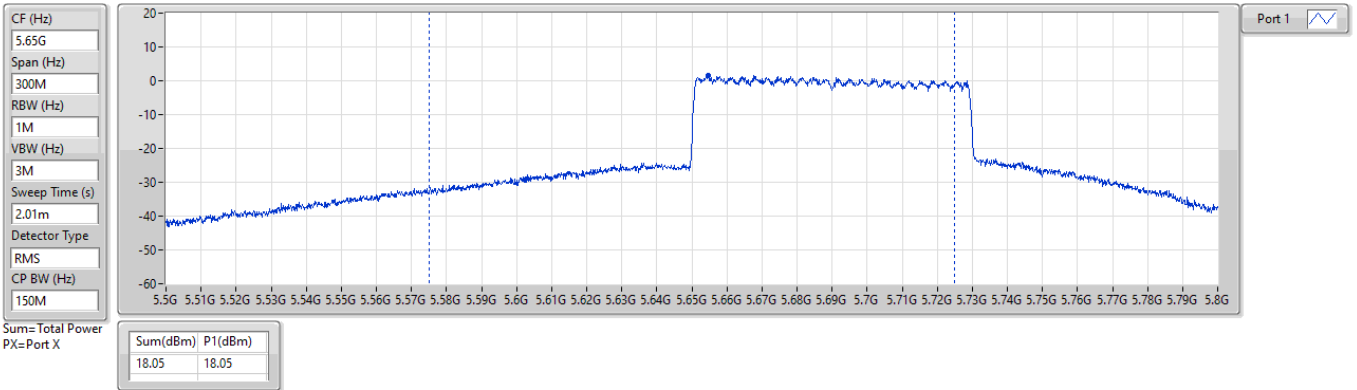

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

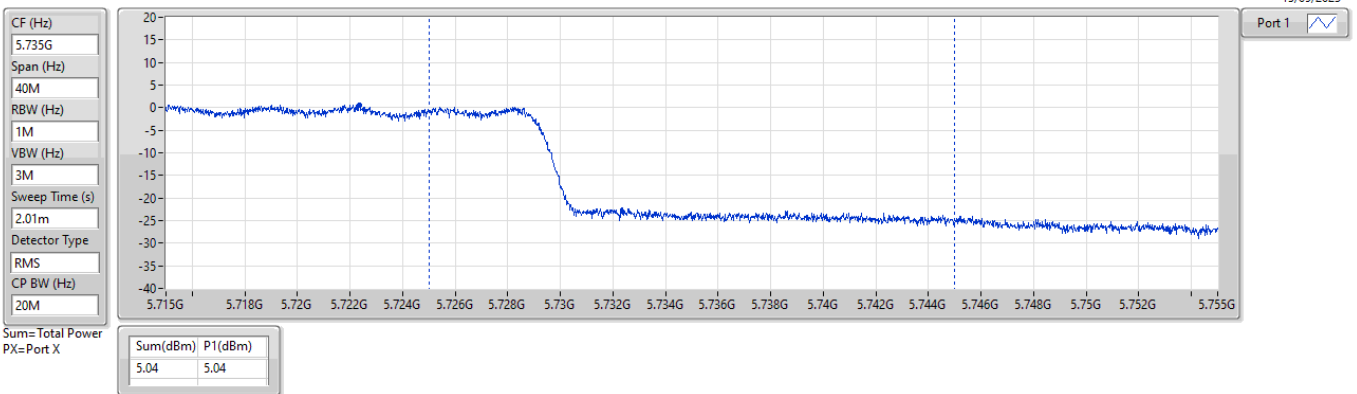




Radiated Emissions below 1GHz

Appendix C.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	384.05M	45.96	46.00	-0.04	Horizontal

Mode 3

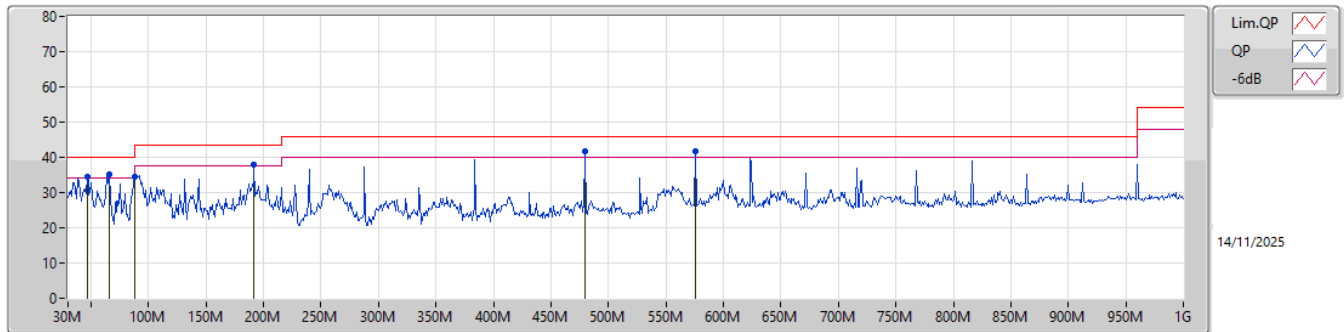

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	46.49M	34.36	40.00	-5.64	-15.65	3	Vertical	104	1.00	-	50.01	15.55	0.65	31.85		
PK	65.89M	35.31	40.00	-4.69	-18.91	3	Vertical	148	2.00	-	54.22	12.29	0.78	31.98		
PK	88M	34.55	40.00	-5.45	-16.68	3	Vertical	62	1.25	-	51.23	14.44	0.89	32.01		
PK	191.99M	38.08	43.50	-5.42	-15.66	3	Vertical	360	1.25	-	53.74	15.02	1.35	32.03		
PK	480.08M	41.66	46.00	-4.34	-7.18	3	Vertical	276	3.00	"Worst"	48.84	22.98	2.20	32.36		
PK	576.11M	41.65	46.00	-4.35	-5.39	3	Vertical	131	2.00	-	47.04	24.53	2.44	32.36		

Mode 3

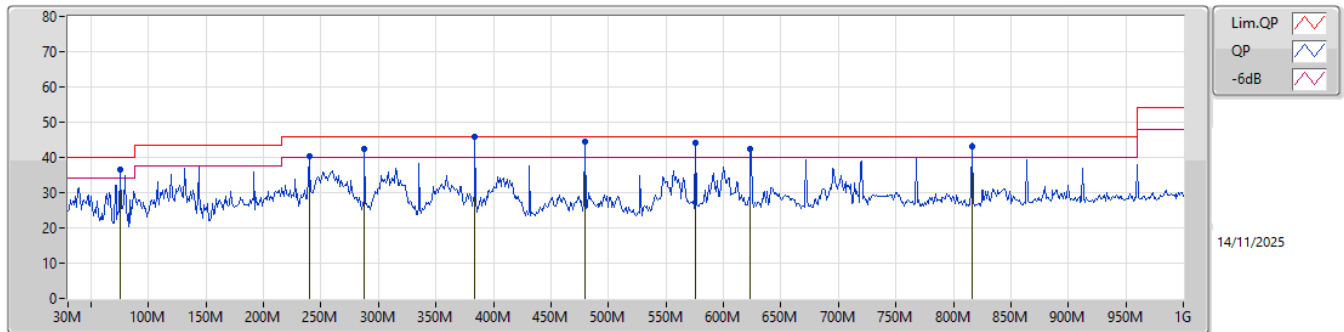

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	75.59M	36.70	40.00	-3.30	-18.52	3	Horizontal	166	3.00	-	55.22	12.65	0.82	31.99		
PK	240M	40.19	46.00	-5.81	-13.34	3	Horizontal	31	2.00	-	53.53	17.20	1.52	32.06		
PK	288.02M	42.30	46.00	-3.70	-11.53	3	Horizontal	49	1.00	-	53.83	18.93	1.67	32.13		
QP	384.05M	45.96	46.00	-0.04	-9.15	3	Horizontal	352	1.00	"Worst"	55.11	21.05	1.96	32.16		
QP	480.08M	44.62	46.00	-1.38	-7.18	3	Horizontal	132	1.00	-	51.80	22.98	2.20	32.36		
QP	576.11M	44.16	46.00	-1.84	-5.39	3	Horizontal	126	1.50	-	49.55	24.53	2.44	32.36		
PK	623.64M	42.35	46.00	-3.65	-5.18	3	Horizontal	126	1.50	-	47.53	24.80	2.55	32.53		
QP	816.67M	43.14	46.00	-2.86	-3.97	3	Horizontal	161	1.00	-	47.11	25.77	2.97	32.71		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	PK	5.351G	72.85	74.00	-1.15	3	Horizontal	13	1.00	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

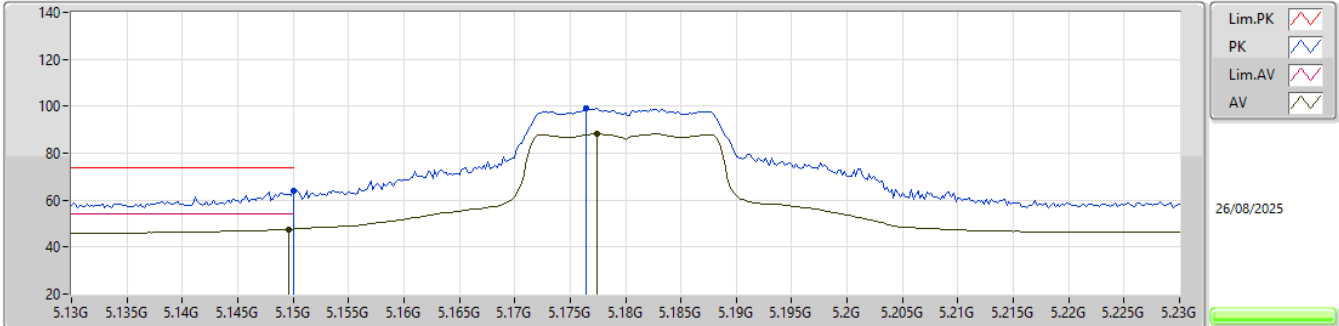


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	64.11	74.00	-9.89	57.55	3	Vertical	117	1.77	-	33.50	6.78	33.72			
AV	5.1496G	47.64	54.00	-6.36	41.08	3	Vertical	117	1.77	-	33.50	6.78	33.72			
PK	5.1764G	99.09	Inf	-Inf	92.39	3	Vertical	117	1.77	-	33.61	6.82	33.73			
AV	5.1774G	88.23	Inf	-Inf	81.53	3	Vertical	117	1.77	-	33.61	6.82	33.73			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

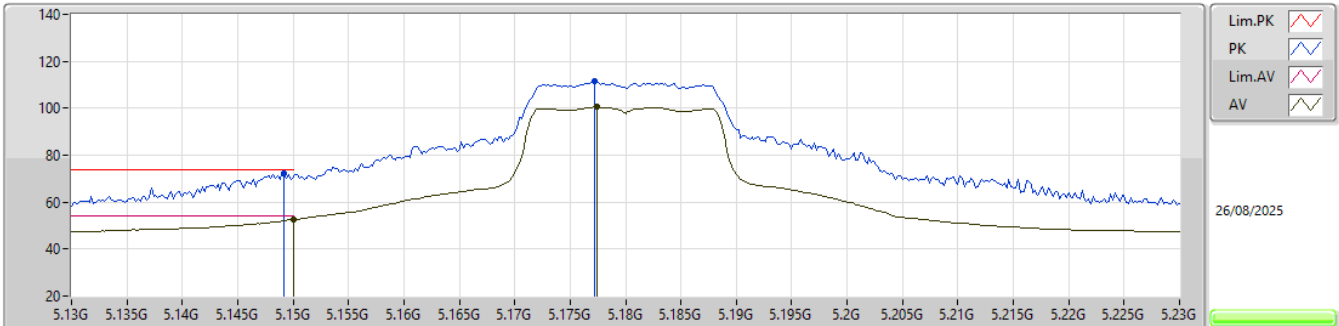


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1492G	72.12	74.00	-1.88	65.56	3	Horizontal	194	2.91	-	33.50	6.78	33.72			
AV	5.15G	52.48	54.00	-1.52	45.92	3	Horizontal	194	2.91	-	33.50	6.78	33.72			
PK	5.1772G	111.36	Inf	-Inf	104.66	3	Horizontal	194	2.91	-	33.61	6.82	33.73			
AV	5.1774G	100.48	Inf	-Inf	93.78	3	Horizontal	194	2.91	-	33.61	6.82	33.73			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

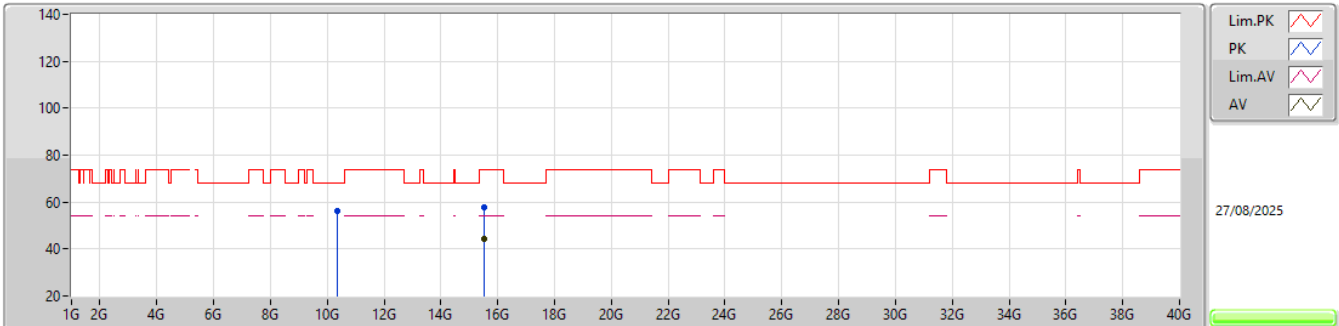


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35624G	56.19	68.20	-12.01	72.23	3	Vertical	102	1.00	-	39.62	11.01	66.67			
AV	15.53799G	44.10	54.00	-9.90	55.97	3	Vertical	175	1.42	-	38.85	13.10	63.82			
PK	15.53848G	57.87	74.00	-16.13	69.74	3	Vertical	175	1.42	-	38.85	13.10	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

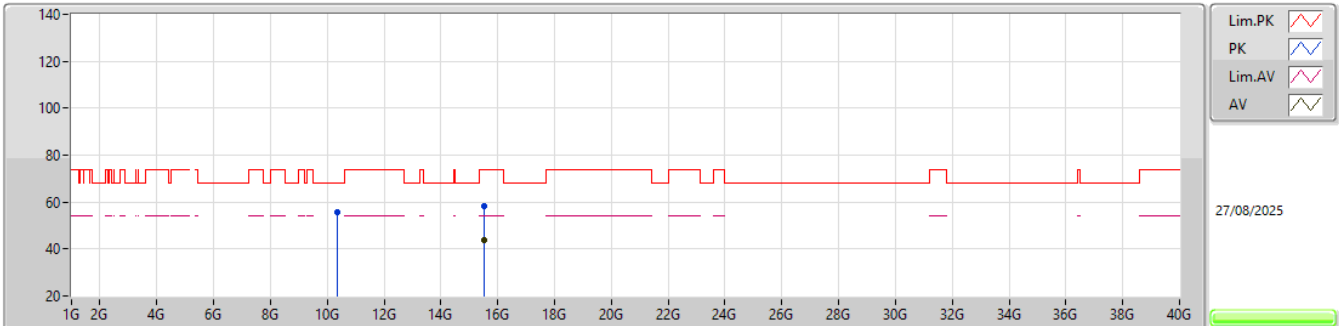


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35808G	55.50	68.20	-12.70	71.53	3	Horizontal	344	1.91	-	39.63	11.01	66.67			
PK	15.53849G	58.34	74.00	-15.66	70.21	3	Horizontal	314	2.18	-	38.85	13.10	63.82			
AV	15.53782G	43.98	54.00	-10.02	55.85	3	Horizontal	314	2.18	-	38.85	13.10	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

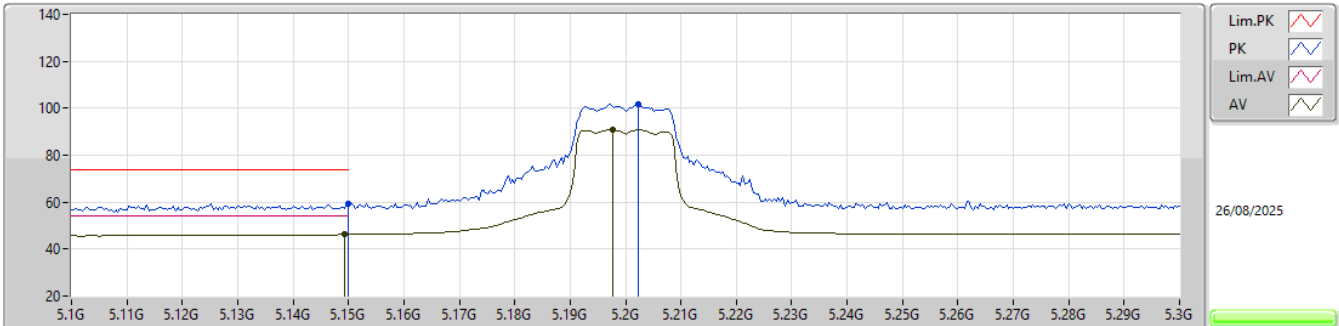


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.15G	59.37	74.00	-14.63	52.81	3	Vertical	105	2.35	-	33.50	6.78	33.72				
AV	5.1492G	46.17	54.00	-7.83	39.61	3	Vertical	105	2.35	-	33.50	6.78	33.72				
PK	5.2024G	101.80	Inf	-Inf	94.98	3	Vertical	105	2.35	-	33.70	6.85	33.73				
AV	5.1976G	90.83	Inf	-Inf	84.02	3	Vertical	105	2.35	-	33.69	6.85	33.73				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

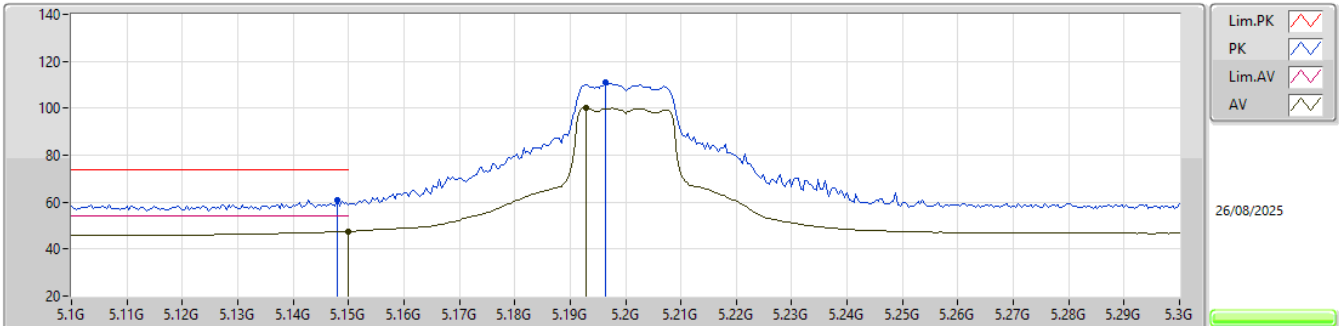


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	60.99	74.00	-13.01	54.44	3	Horizontal	200	2.74	-	33.50	6.77	33.72			
AV	5.15G	47.56	54.00	-6.44	41.00	3	Horizontal	200	2.74	-	33.50	6.78	33.72			
PK	5.1964G	111.16	Inf	-Inf	104.36	3	Horizontal	200	2.74	-	33.69	6.84	33.73			
AV	5.1928G	99.99	Inf	-Inf	93.21	3	Horizontal	200	2.74	-	33.67	6.84	33.73			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

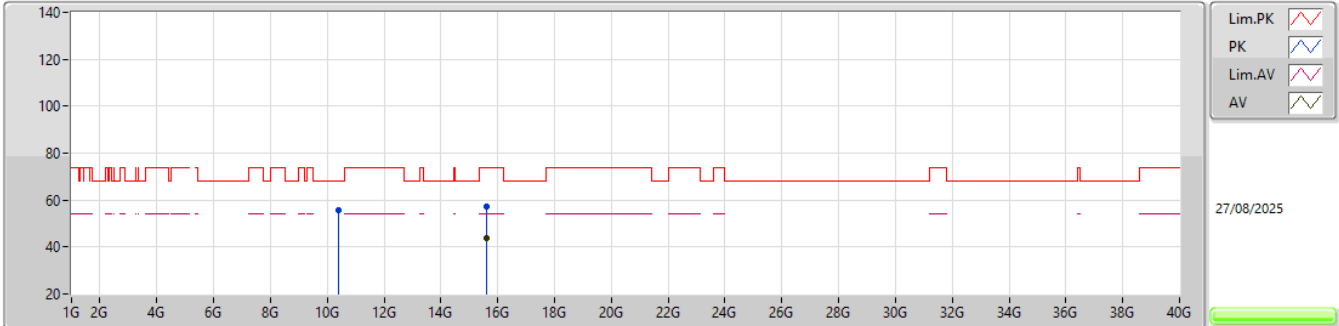


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40069G	55.53	68.20	-12.67	71.38	3	Vertical	200	1.20	-	39.80	11.04	66.69			
PK	15.60207G	57.41	74.00	-16.59	69.53	3	Vertical	20	2.21	-	38.59	13.14	63.85			
AV	15.59775G	43.70	54.00	-10.30	55.80	3	Vertical	20	2.21	-	38.61	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

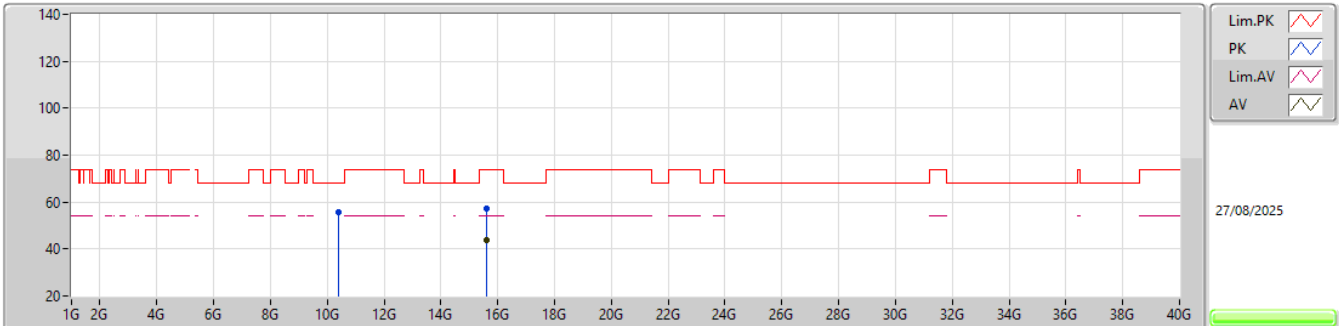


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40013G	55.71	68.20	-12.49	71.56	3	Horizontal	290	1.77	-	39.80	11.04	66.69			
PK	15.60086G	57.32	74.00	-16.68	69.44	3	Horizontal	219	2.91	-	38.59	13.14	63.85			
AV	15.59758G	43.65	54.00	-10.35	55.75	3	Horizontal	219	2.91	-	38.61	13.14	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

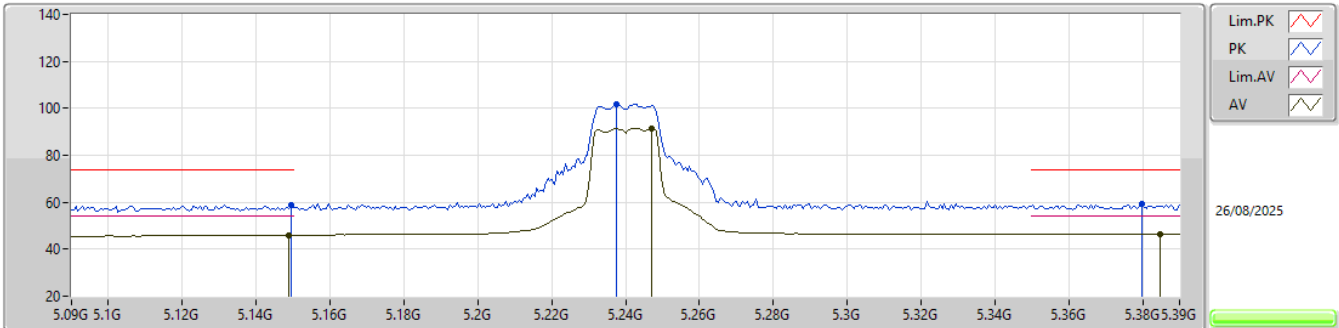


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1494G	58.86	74.00	-15.14	52.30	3	Vertical	106	2.30	-	33.50	6.78	33.72			
AV	5.1488G	45.95	54.00	-8.05	39.39	3	Vertical	106	2.30	-	33.50	6.78	33.72			
PK	5.2376G	101.86	Inf	-Inf	94.96	3	Vertical	106	2.30	-	33.78	6.86	33.74			
AV	5.2472G	91.40	Inf	-Inf	84.49	3	Vertical	106	2.30	-	33.79	6.86	33.74			
PK	5.3798G	59.06	74.00	-14.94	52.14	3	Vertical	106	2.30	-	33.82	6.88	33.78			
AV	5.3846G	46.52	54.00	-7.48	39.58	3	Vertical	106	2.30	-	33.84	6.88	33.78			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

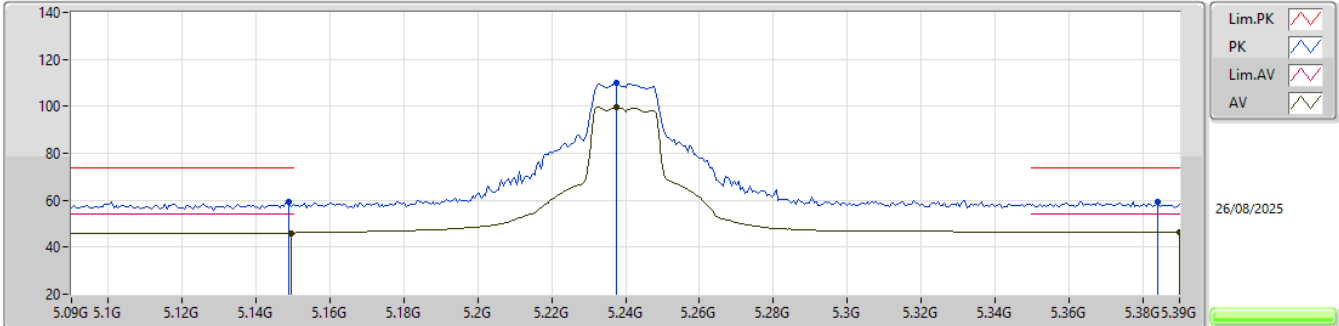


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1488G	59.21	74.00	-14.79	52.65	3	Horizontal	201	2.86	-	33.50	6.78	33.72			
AV	5.1494G	46.12	54.00	-7.88	39.56	3	Horizontal	201	2.86	-	33.50	6.78	33.72			
PK	5.2376G	110.19	Inf	-Inf	103.29	3	Horizontal	201	2.86	-	33.78	6.86	33.74			
AV	5.2376G	99.56	Inf	-Inf	92.66	3	Horizontal	201	2.86	-	33.78	6.86	33.74			
PK	5.384G	59.30	74.00	-14.70	52.36	3	Horizontal	201	2.86	-	33.84	6.88	33.78			
AV	5.39G	46.60	54.00	-7.40	39.64	3	Horizontal	201	2.86	-	33.86	6.88	33.78			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

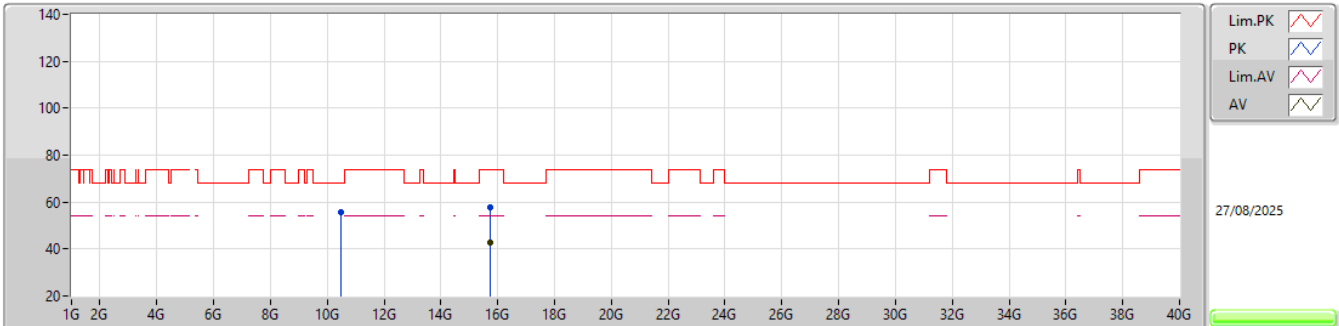


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48179G	55.68	68.20	-12.52	71.41	3	Vertical	227	1.81	-	39.90	11.09	66.72			
PK	15.72096G	57.63	74.00	-16.37	69.76	3	Vertical	72	1.73	-	38.54	13.22	63.89			
AV	15.71775G	42.85	54.00	-11.15	54.98	3	Vertical	72	1.73	-	38.54	13.22	63.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

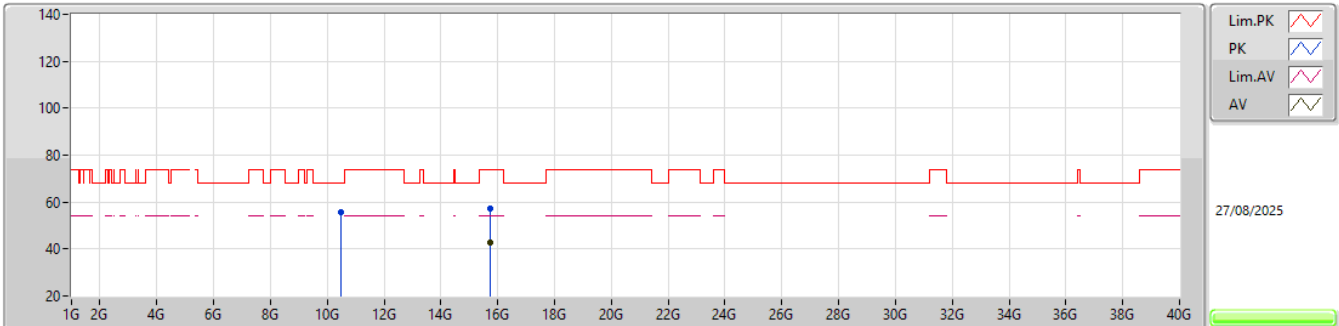


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47759G	55.71	68.20	-12.49	71.44	3	Horizontal	229	2.65	-	39.90	11.09	66.72			
PK	15.7176G	57.34	74.00	-16.66	69.47	3	Horizontal	216	1.56	-	38.54	13.22	63.89			
AV	15.7176G	42.70	54.00	-11.30	54.83	3	Horizontal	216	1.56	-	38.54	13.22	63.89			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

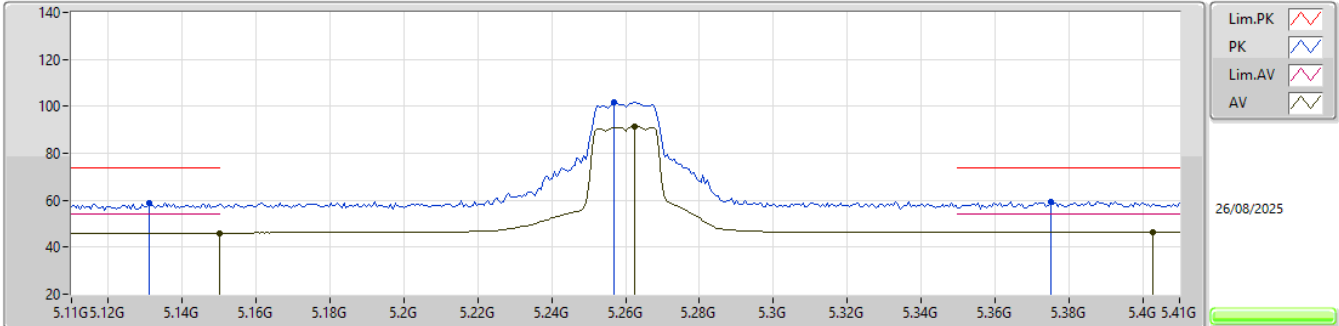


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.131G	58.68	74.00	-15.32	52.14	3	Vertical	114	2.69	-	33.50	6.75	33.71			
AV	5.15G	46.00	54.00	-8.00	39.44	3	Vertical	114	2.69	-	33.50	6.78	33.72			
PK	5.257G	101.78	Inf	-Inf	94.86	3	Vertical	114	2.69	-	33.81	6.86	33.75			
AV	5.2624G	91.51	Inf	-Inf	84.58	3	Vertical	114	2.69	-	33.82	6.86	33.75			
PK	5.3752G	59.39	74.00	-14.61	52.49	3	Vertical	114	2.69	-	33.80	6.88	33.78			
AV	5.4028G	46.60	54.00	-7.40	39.60	3	Vertical	114	2.69	-	33.90	6.88	33.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

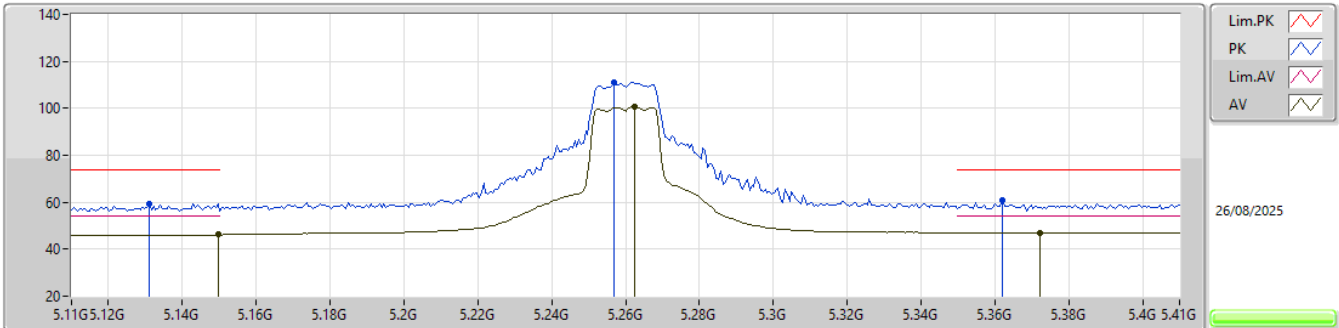


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.131G	59.55	74.00	-14.45	53.01	3	Horizontal	11	1.00	-	33.50	6.75	33.71			
AV	5.1496G	46.13	54.00	-7.87	39.57	3	Horizontal	11	1.00	-	33.50	6.78	33.72			
PK	5.257G	111.04	Inf	-Inf	104.12	3	Horizontal	11	1.00	-	33.81	6.86	33.75			
AV	5.2624G	100.57	Inf	-Inf	93.64	3	Horizontal	11	1.00	-	33.82	6.86	33.75			
PK	5.362G	61.12	74.00	-12.88	54.27	3	Horizontal	11	1.00	-	33.75	6.87	33.77			
AV	5.3722G	46.78	54.00	-7.22	39.89	3	Horizontal	11	1.00	-	33.79	6.88	33.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

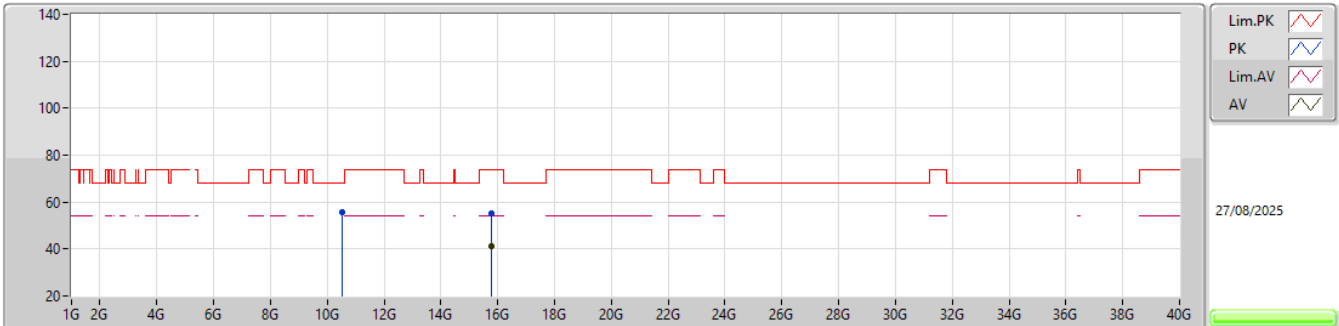


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51767G	55.65	68.20	-12.55	71.38	3	Vertical	75	1.08	-	39.86	11.12	66.71			
PK	15.77983G	55.21	74.00	-18.79	67.50	3	Vertical	311	1.55	-	38.36	13.27	63.92			
AV	15.77923G	41.32	54.00	-12.68	53.60	3	Vertical	311	1.55	-	38.37	13.27	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5260MHz_TX

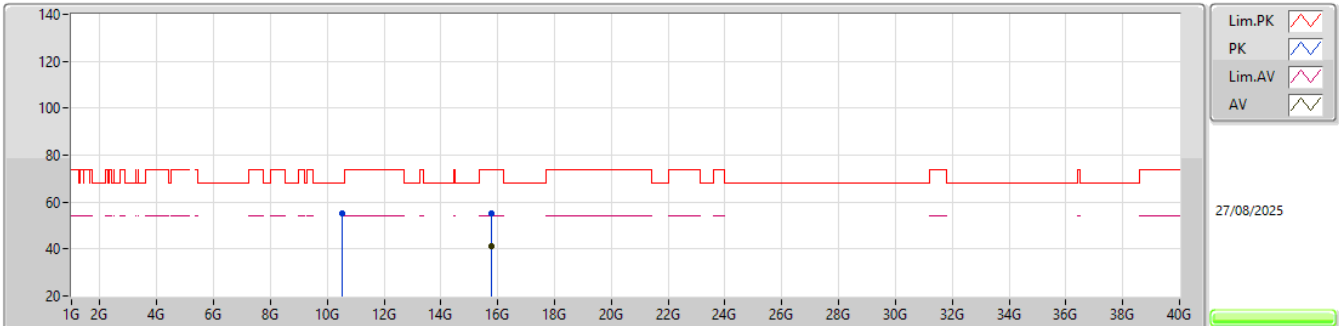
EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.52217G	55.08	68.20	-13.12	70.81	3	Horizontal	93	1.17	-	39.86	11.12	66.71			
PK	15.7824G	55.38	74.00	-18.62	67.69	3	Horizontal	97	1.29	-	38.34	13.27	63.92			
AV	15.77845G	41.27	54.00	-12.73	53.56	3	Horizontal	97	1.29	-	38.37	13.26	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

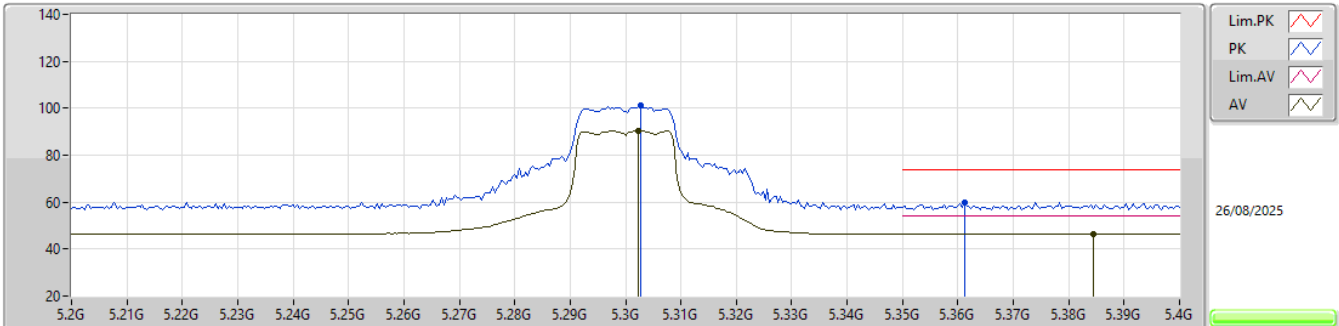


EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3028G	101.00	Inf	-Inf	94.00	3	Vertical	105	1.85	-	33.89	6.87	33.76				
AV	5.3024G	90.45	Inf	-Inf	83.45	3	Vertical	105	1.85	-	33.89	6.87	33.76				
PK	5.3612G	60.02	74.00	-13.98	53.18	3	Vertical	105	1.85	-	33.74	6.87	33.77				
AV	5.3844G	46.47	54.00	-7.53	39.53	3	Vertical	105	1.85	-	33.84	6.88	33.78				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

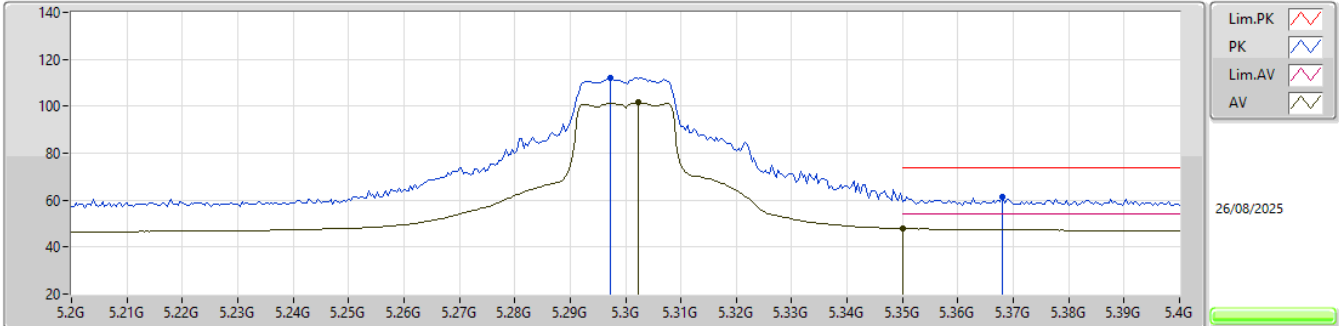


EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2972G	112.21	Inf	-Inf	105.22	3	Horizontal	16	1.00	-	33.89	6.86	33.76			
AV	5.3024G	101.48	Inf	-Inf	94.48	3	Horizontal	16	1.00	-	33.89	6.87	33.76			
PK	5.368G	61.25	74.00	-12.75	54.38	3	Horizontal	16	1.00	-	33.77	6.88	33.78			
AV	5.35G	47.79	54.00	-6.21	40.99	3	Horizontal	16	1.00	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

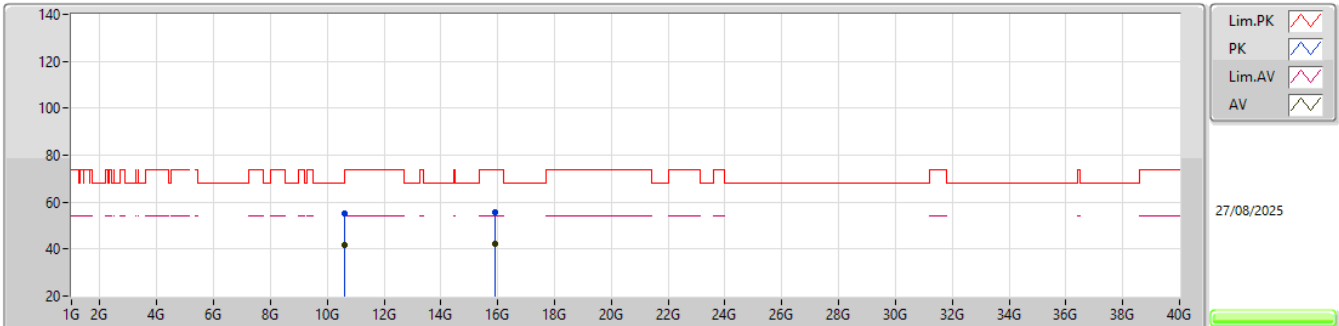


EUT_Z_1TX
Setting 20
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60039G	55.42	74.00	-18.58	70.97	3	Vertical	244	2.42	-	39.90	11.17	66.62			
AV	10.60107G	41.68	54.00	-12.32	57.23	3	Vertical	244	2.42	-	39.90	11.17	66.62			
PK	15.90246G	55.71	74.00	-18.29	68.23	3	Vertical	1	1.10	-	38.09	13.35	63.96			
AV	15.9025G	42.22	54.00	-11.78	54.74	3	Vertical	1	1.10	-	38.09	13.35	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

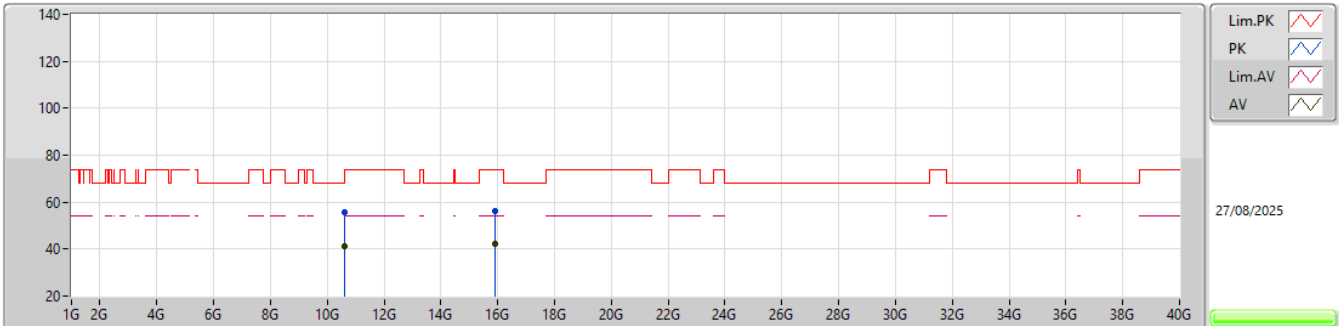


EUT_Z_1TX
Setting 20
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.6025G	55.48	74.00	-18.52	71.03	3	Horizontal	221	2.68	-	39.90	11.17	66.62			
AV	10.60135G	41.33	54.00	-12.67	56.88	3	Horizontal	221	2.68	-	39.90	11.17	66.62			
PK	15.89871G	56.08	74.00	-17.92	68.59	3	Horizontal	145	2.62	-	38.10	13.35	63.96			
AV	15.90246G	42.47	54.00	-11.53	54.99	3	Horizontal	145	2.62	-	38.09	13.35	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

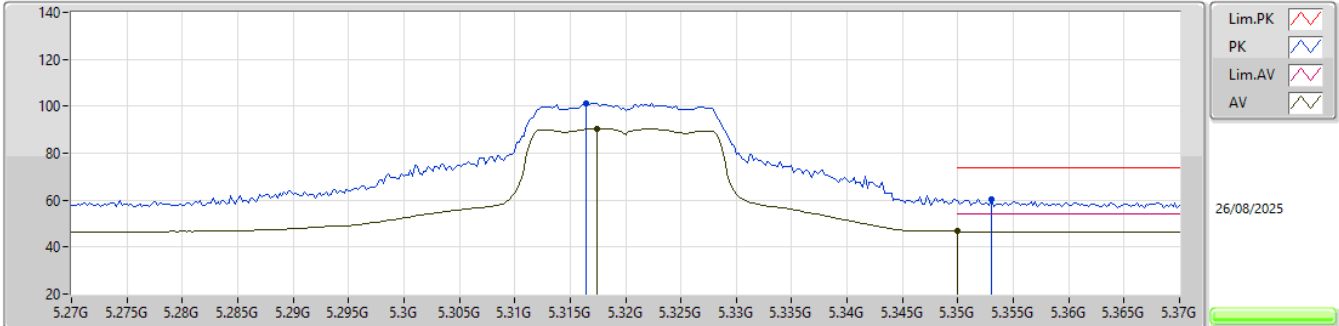


EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3164G	101.25	Inf	-Inf	94.31	3	Vertical	106	1.85	-	33.83	6.87	33.76			
AV	5.3174G	90.54	Inf	-Inf	83.60	3	Vertical	106	1.85	-	33.83	6.87	33.76			
PK	5.353G	60.16	74.00	-13.84	53.35	3	Vertical	106	1.85	-	33.71	6.87	33.77			
AV	5.35G	46.65	54.00	-7.35	39.85	3	Vertical	106	1.85	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

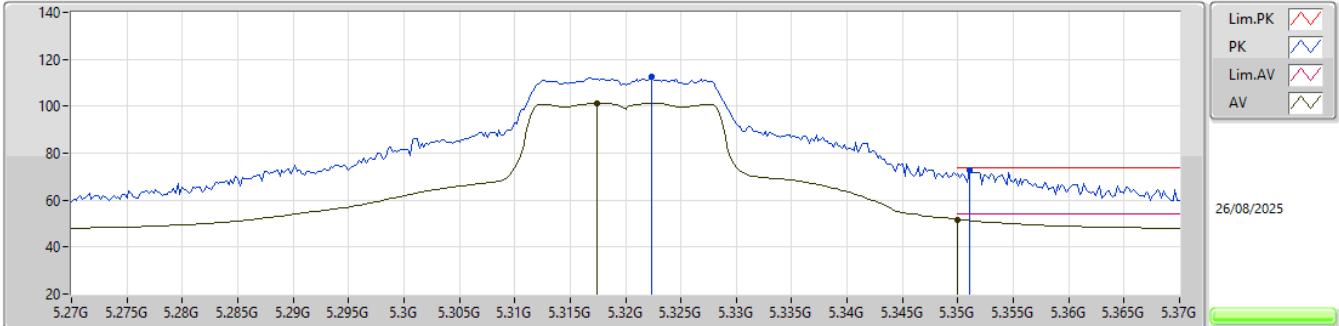


EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3224G	112.47	Inf	-Inf	105.55	3	Horizontal	13	1.00	-	33.81	6.87	33.76			
AV	5.3174G	101.26	Inf	-Inf	94.32	3	Horizontal	13	1.00	-	33.83	6.87	33.76			
PK	5.351G	72.85	74.00	-1.15	66.05	3	Horizontal	13	1.00	-	33.70	6.87	33.77			
AV	5.35G	51.63	54.00	-2.37	44.83	3	Horizontal	13	1.00	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5320MHz_TX

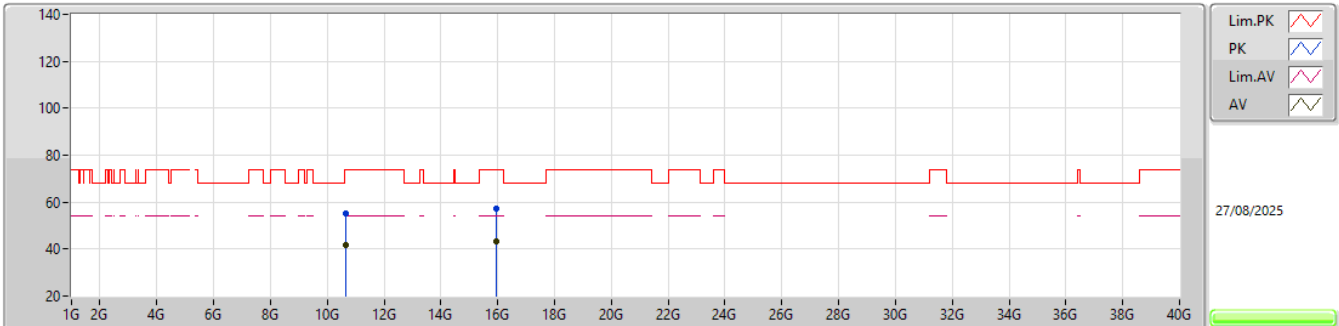EUT_Z_1TX
Setting 20
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63966G	55.40	74.00	-18.60	70.88	3	Vertical	63	2.48	-	39.90	11.20	66.58			
AV	10.63769G	41.78	54.00	-12.22	57.27	3	Vertical	63	2.48	-	39.90	11.19	66.58			
PK	15.95825G	57.28	74.00	-16.72	69.99	3	Vertical	105	2.67	-	37.88	13.39	63.98			
AV	15.96019G	43.15	54.00	-10.85	55.86	3	Vertical	105	2.67	-	37.88	13.39	63.98			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

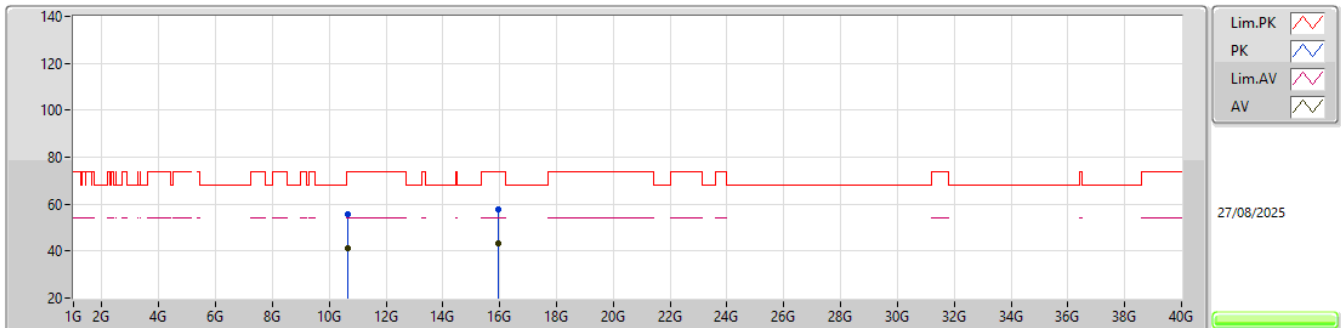


EUT Z_1TX
Setting 20
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.64136G	55.51	74.00	-18.49	70.99	3	Horizontal	219	1.34	-	39.90	11.20	66.58				
AV	10.63782G	41.39	54.00	-12.61	56.88	3	Horizontal	219	1.34	-	39.90	11.19	66.58				
PK	15.96176G	57.68	74.00	-16.32	70.40	3	Horizontal	42	2.23	-	37.88	13.39	63.99				
AV	15.96034G	43.52	54.00	-10.48	56.23	3	Horizontal	42	2.23	-	37.88	13.39	63.98				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

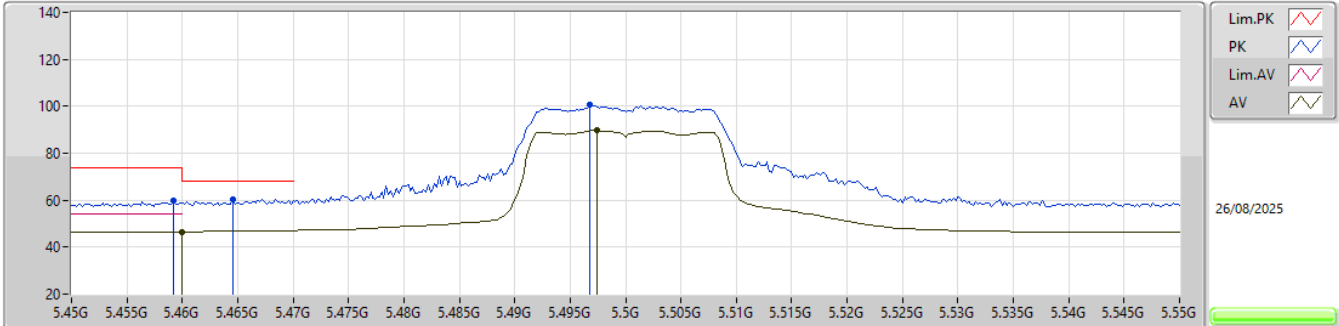


EUT_Z_1TX
Setting 16.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4592G	59.89	74.00	-14.11	52.92	3	Vertical	113.9	2.49	-	33.88	6.89	33.80			
AV	5.46G	46.61	54.00	-7.39	39.64	3	Vertical	113.9	2.49	-	33.88	6.89	33.80			
PK	5.4646G	60.28	68.20	-7.92	53.32	3	Vertical	113.9	2.49	-	33.87	6.89	33.80			
PK	5.4968G	100.52	Inf	-Inf	93.63	3	Vertical	113.9	2.49	-	33.81	6.89	33.81			
AV	5.4974G	89.71	Inf	-Inf	82.82	3	Vertical	113.9	2.49	-	33.81	6.89	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

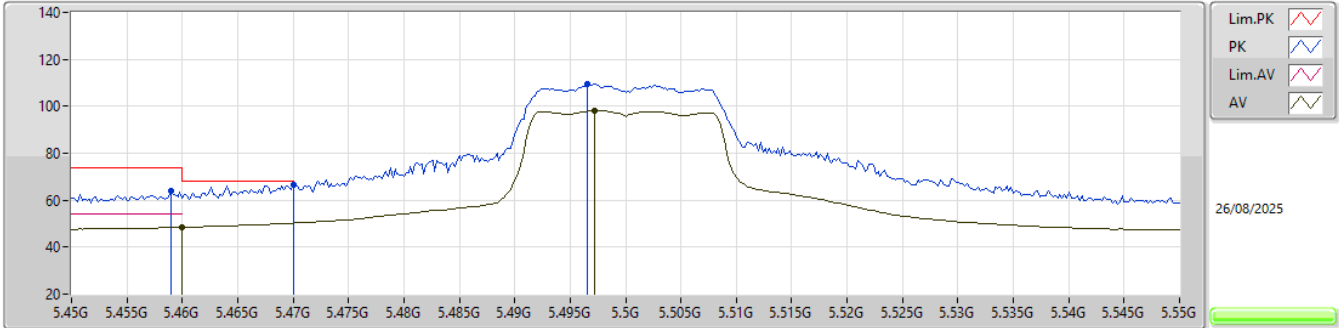


EUT_Z_1TX
Setting 16.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	63.91	74.00	-10.09	56.94	3	Horizontal	171	2.76	-	33.88	6.89	33.80			
AV	5.46G	48.54	54.00	-5.46	41.57	3	Horizontal	171	2.76	-	33.88	6.89	33.80			
PK	5.47G	66.62	68.20	-1.58	59.67	3	Horizontal	171	2.76	-	33.86	6.89	33.80			
PK	5.4966G	109.27	Inf	-Inf	102.38	3	Horizontal	171	2.76	-	33.81	6.89	33.81			
AV	5.4972G	98.18	Inf	-Inf	91.29	3	Horizontal	171	2.76	-	33.81	6.89	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5500MHz_TX

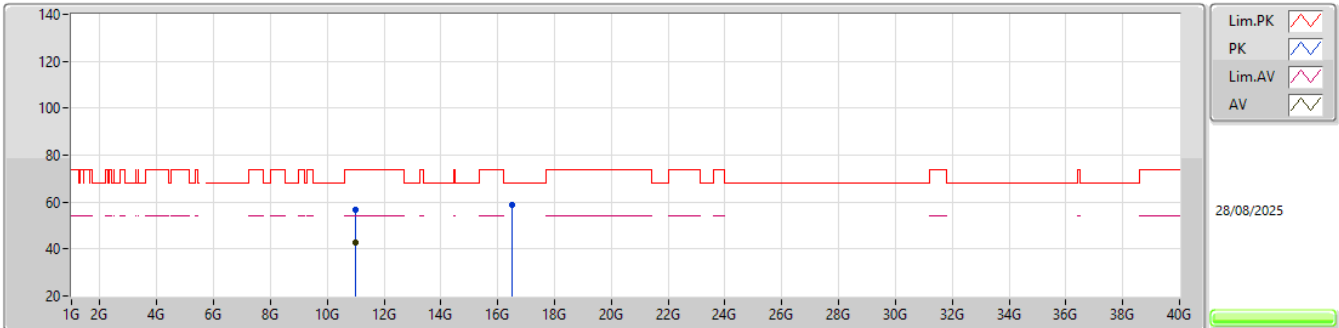EUT_Y_4TX
Setting 16.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99986G	56.64	74.00	-17.36	71.20	3	Vertical	252	1.25	-	40.20	11.43	66.19			
AV	10.99994G	42.51	54.00	-11.49	57.07	3	Vertical	252	1.25	-	40.20	11.43	66.19			
PK	16.50014G	59.00	68.20	-9.20	69.15	3	Vertical	336	2.22	-	40.00	13.59	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5500MHz_TX

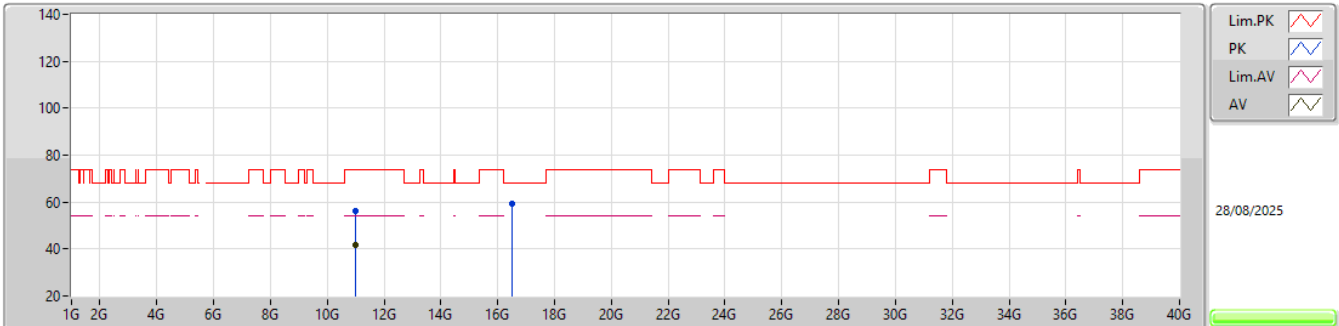EUT_Y_4TX
Setting 16.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00205G	56.07	74.00	-17.93	70.64	3	Horizontal	355	1.07	-	40.19	11.43	66.19			
AV	10.99991G	41.98	54.00	-12.02	56.54	3	Horizontal	355	1.07	-	40.20	11.43	66.19			
PK	16.49871G	59.29	68.20	-8.91	69.45	3	Horizontal	106	1.18	-	39.99	13.59	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

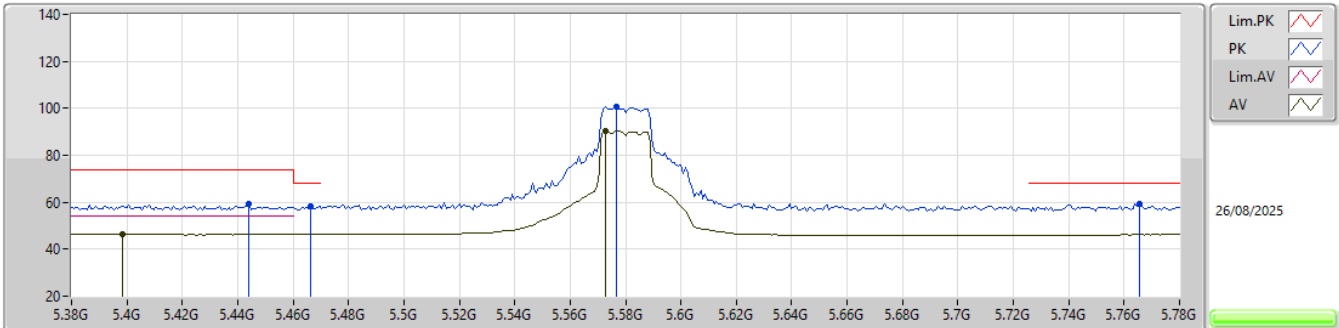EUT_Z_1TX
Setting 21
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.444G	59.25	74.00	-14.75	52.26	3	Vertical	110	1.90	-	33.90	6.89	33.80			
AV	5.3984G	46.27	54.00	-7.73	39.28	3	Vertical	110	1.90	-	33.89	6.88	33.78			
PK	5.4664G	58.50	68.20	-9.70	51.54	3	Vertical	110	1.90	-	33.87	6.89	33.80			
PK	5.5768G	100.56	Inf	-Inf	93.76	3	Vertical	110	1.90	-	33.69	6.91	33.80			
AV	5.5728G	90.51	Inf	-Inf	83.69	3	Vertical	110	1.90	-	33.71	6.91	33.80			
PK	5.7656G	59.46	68.20	-8.74	52.38	3	Vertical	110	1.90	-	33.73	7.13	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

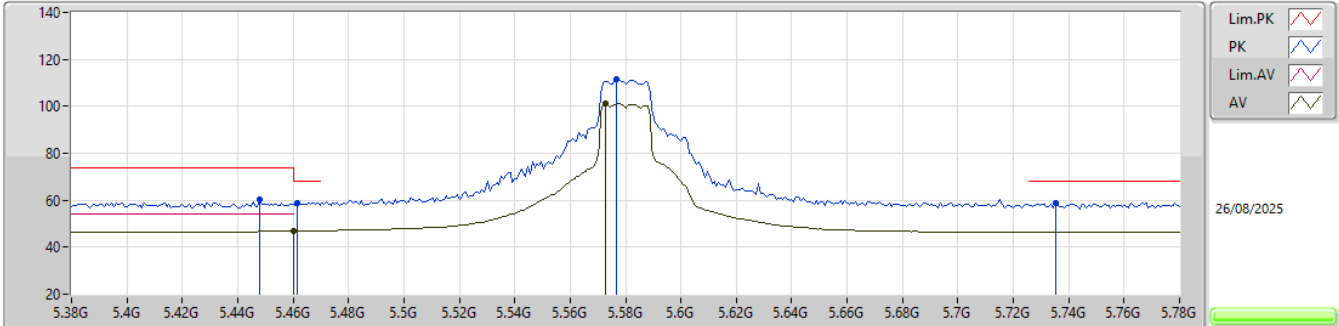


EUT_Z_1TX
Setting 21
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.448G	60.19	74.00	-13.81	53.20	3	Horizontal	196	2.67	-	33.90	6.89	33.80			
PK	5.4616G	59.05	68.20	-9.15	52.08	3	Horizontal	196	2.67	-	33.88	6.89	33.80			
AV	5.46G	46.83	54.00	-7.17	39.86	3	Horizontal	196	2.67	-	33.88	6.89	33.80			
PK	5.5768G	111.76	Inf	-Inf	104.96	3	Horizontal	196	2.67	-	33.69	6.91	33.80			
AV	5.5728G	100.96	Inf	-Inf	94.14	3	Horizontal	196	2.67	-	33.71	6.91	33.80			
PK	5.7352G	58.85	68.20	-9.35	51.87	3	Horizontal	196	2.67	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

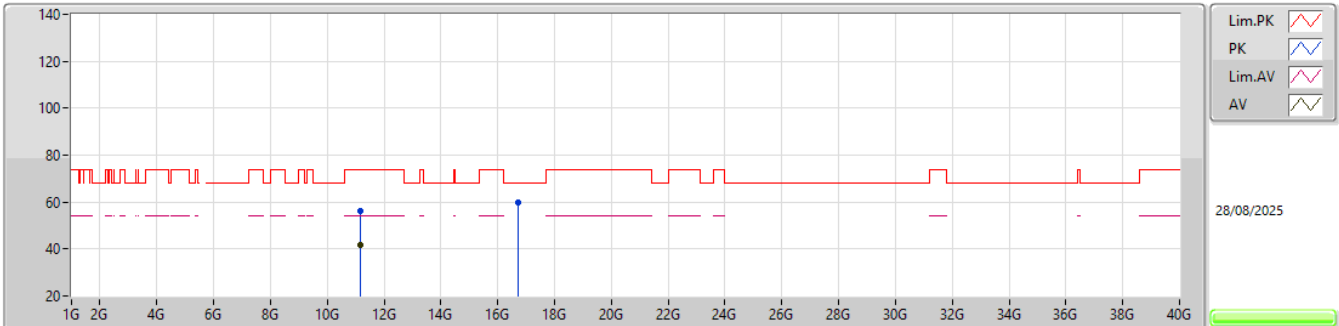EUT_Z_1TX
Setting 21
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15962G	56.17	74.00	-17.83	71.35	3	Vertical	259	2.31	-	39.48	11.53	66.19			
AV	11.15913G	41.67	54.00	-12.33	56.85	3	Vertical	259	2.31	-	39.48	11.53	66.19			
PK	16.73828G	59.97	68.20	-8.23	70.07	3	Vertical	92	1.38	-	40.23	13.67	64.00			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

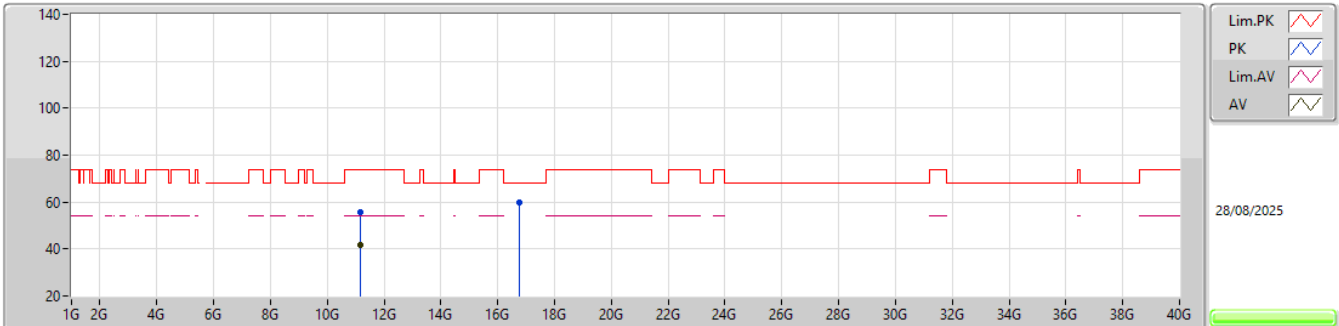EUT_Z_1TX
Setting 21
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16032G	55.60	74.00	-18.40	70.78	3	Horizontal	178	1.19	-	39.48	11.53	66.19			
AV	11.15926G	41.54	54.00	-12.46	56.72	3	Horizontal	178	1.19	-	39.48	11.53	66.19			
PK	16.74248G	60.04	68.20	-8.16	70.13	3	Horizontal	54	1.03	-	40.25	13.67	64.01			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

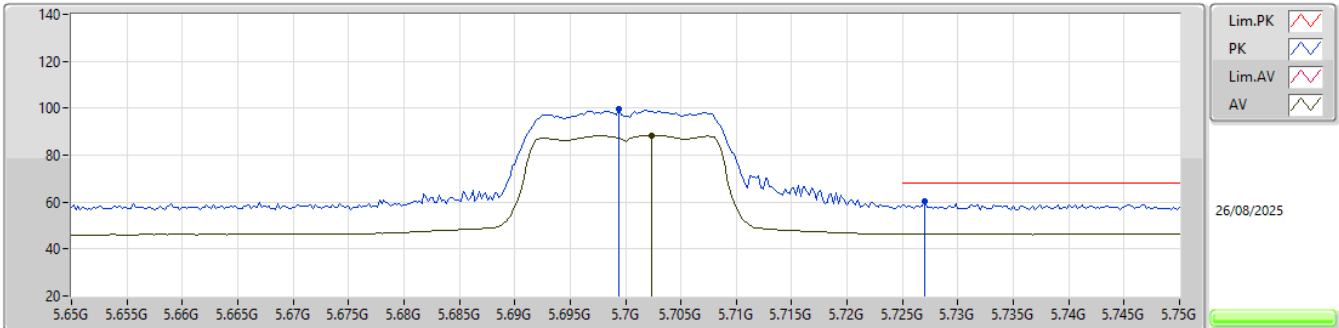
EUT_Z_1TX
Setting 17
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6994G	99.40	Inf	-Inf	92.55	3	Vertical	109	1.82	-	33.60	7.04	33.79			
AV	5.7024G	88.46	Inf	-Inf	81.60	3	Vertical	109	1.82	-	33.60	7.05	33.79			
PK	5.727G	60.11	68.20	-8.09	53.16	3	Vertical	109	1.82	-	33.65	7.08	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

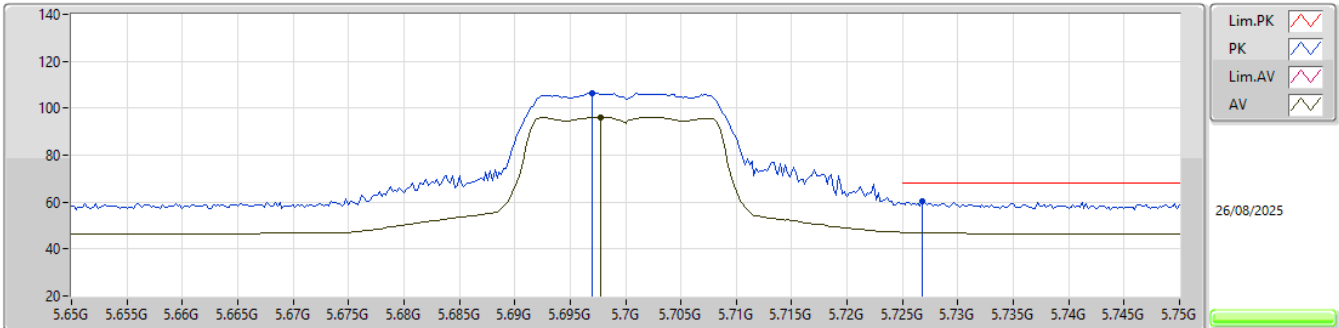EUT_Z_1TX
Setting 17
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.697G	106.57	Inf	-Inf	99.73	3	Horizontal	182	2.16	-	33.59	7.04	33.79			
AV	5.6978G	96.14	Inf	-Inf	89.29	3	Horizontal	182	2.16	-	33.60	7.04	33.79			
PK	5.7268G	60.32	68.20	-7.88	53.37	3	Horizontal	182	2.16	-	33.65	7.08	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

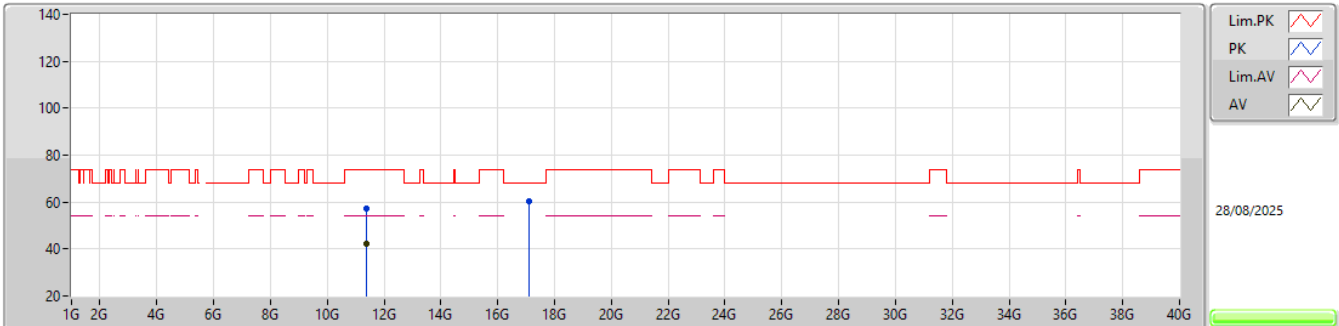EUT_Z_1TX
Setting 17
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39947G	57.01	74.00	-16.99	71.72	3	Vertical	358	2.26	-	39.80	11.69	66.20			
AV	11.40037G	42.50	54.00	-11.50	57.21	3	Vertical	358	2.26	-	39.80	11.69	66.20			
PK	17.1006G	60.27	68.20	-7.93	70.46	3	Vertical	134	1.83	-	40.30	13.79	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

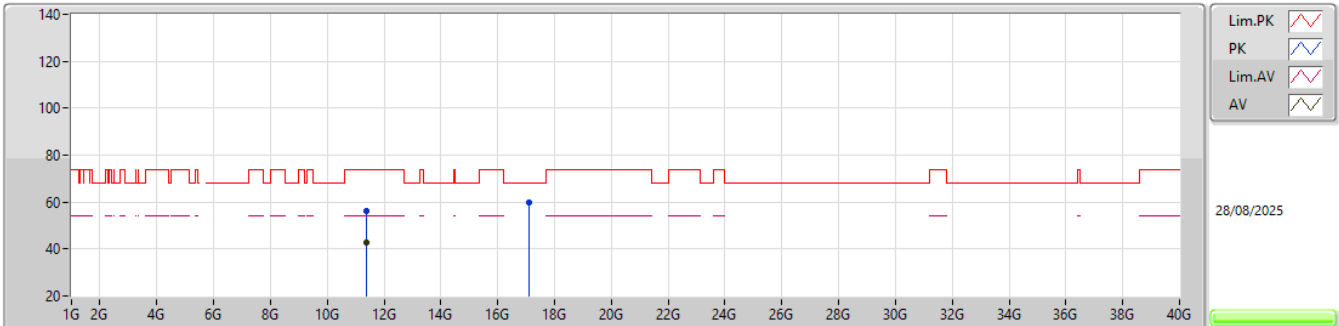EUT_Z_1TX
Setting 17
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40023G	56.22	74.00	-17.78	70.93	3	Horizontal	91	2.31	-	39.80	11.69	66.20			
AV	11.39998G	42.89	54.00	-11.11	57.60	3	Horizontal	91	2.31	-	39.80	11.69	66.20			
PK	17.10084G	60.07	68.20	-8.13	70.26	3	Horizontal	244	1.95	-	40.30	13.79	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

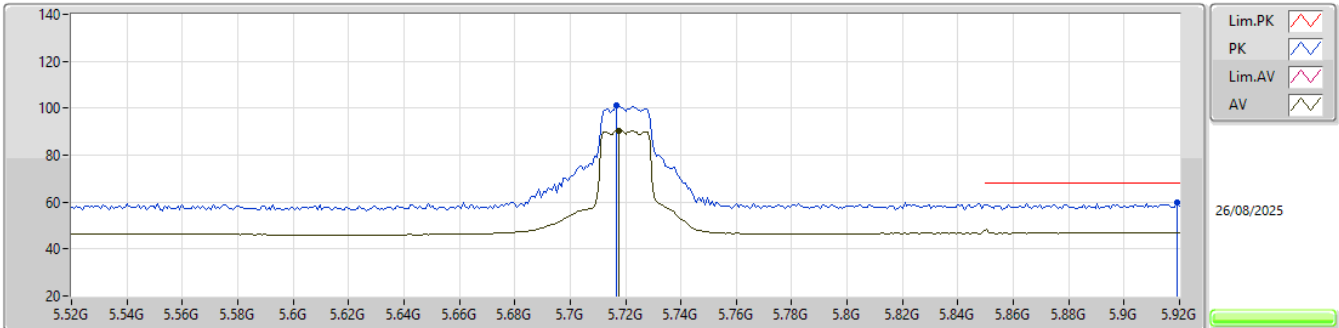EUT_Z_1TX
Setting 22.5
06-E-5-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7168G	101.29	Inf	-Inf	94.37	3	Vertical	111	2.25	-	33.63	7.07	33.78			
AV	5.7176G	90.42	Inf	-Inf	83.49	3	Vertical	111	2.25	-	33.64	7.07	33.78			
PK	5.9192G	59.72	68.20	-8.48	52.00	3	Vertical	111	2.25	-	34.22	7.26	33.76			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

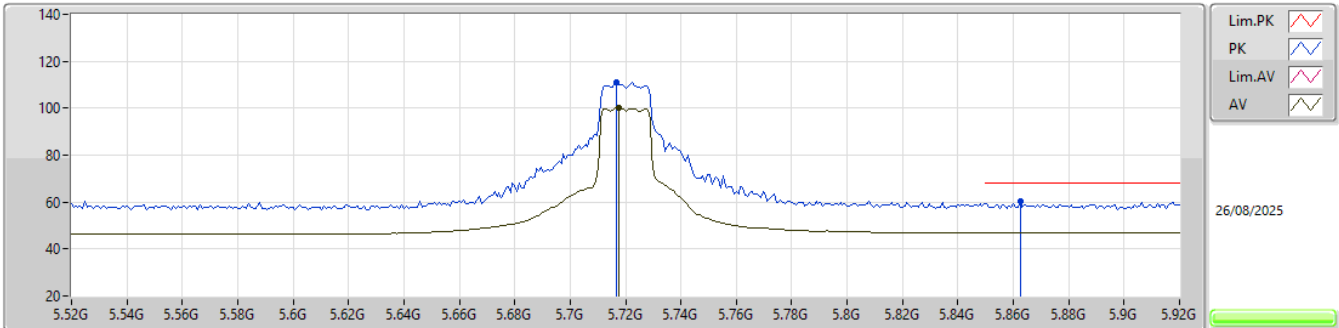


EUT_Z_1TX
Setting 22.5
06-E-5-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7168G	111.18	Inf	-Inf	104.26	3	Horizontal	170	2.29	-	33.63	7.07	33.78			
AV	5.7176G	100.13	Inf	-Inf	93.20	3	Horizontal	170	2.29	-	33.64	7.07	33.78			
PK	5.8624G	60.29	68.20	-7.91	52.89	3	Horizontal	170	2.29	-	33.95	7.22	33.77			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

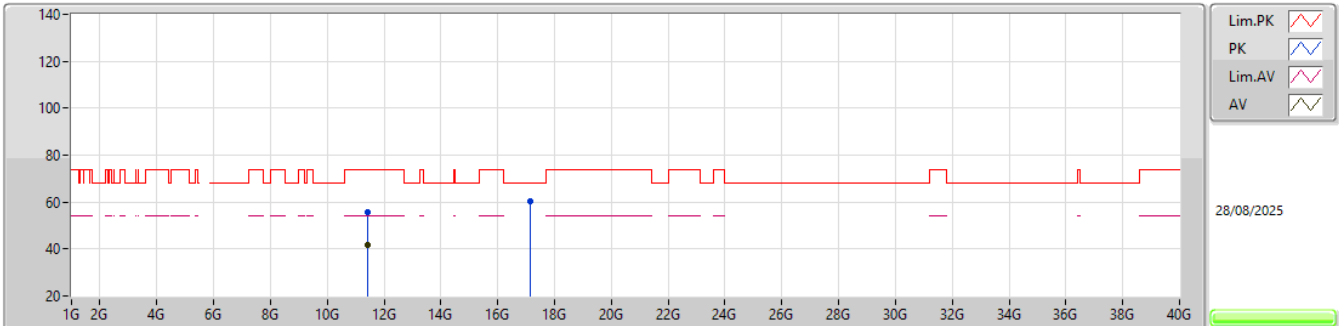


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.44211G	55.82	74.00	-18.18	70.50	3	Vertical	164	2.41	-	39.80	11.72	66.20			
AV	11.43977G	41.84	54.00	-12.16	56.52	3	Vertical	164	2.41	-	39.80	11.72	66.20			
PK	17.15821G	60.40	68.20	-7.80	70.44	3	Vertical	196	2.74	-	40.43	13.81	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

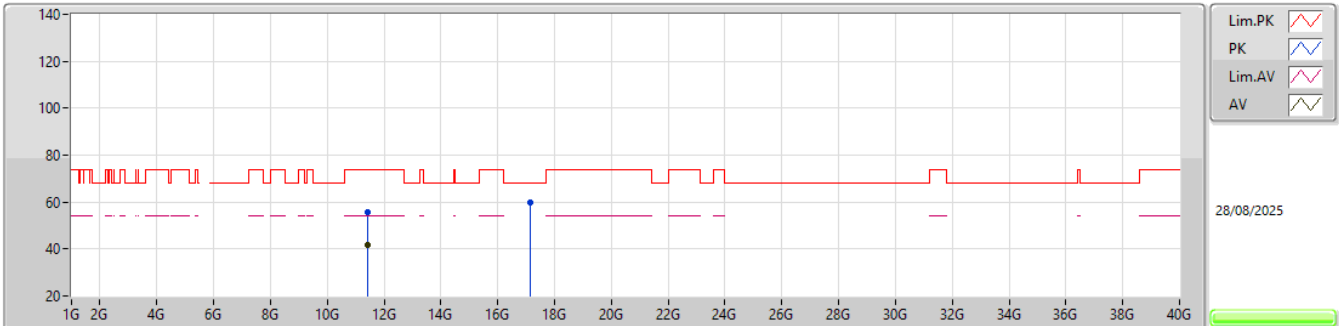


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4391G	55.54	74.00	-18.46	70.22	3	Horizontal	183	1.13	-	39.80	11.72	66.20			
AV	11.44246G	41.60	54.00	-12.40	56.28	3	Horizontal	183	1.13	-	39.80	11.72	66.20			
PK	17.15756G	59.93	68.20	-8.27	69.97	3	Horizontal	77	1.42	-	40.43	13.81	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

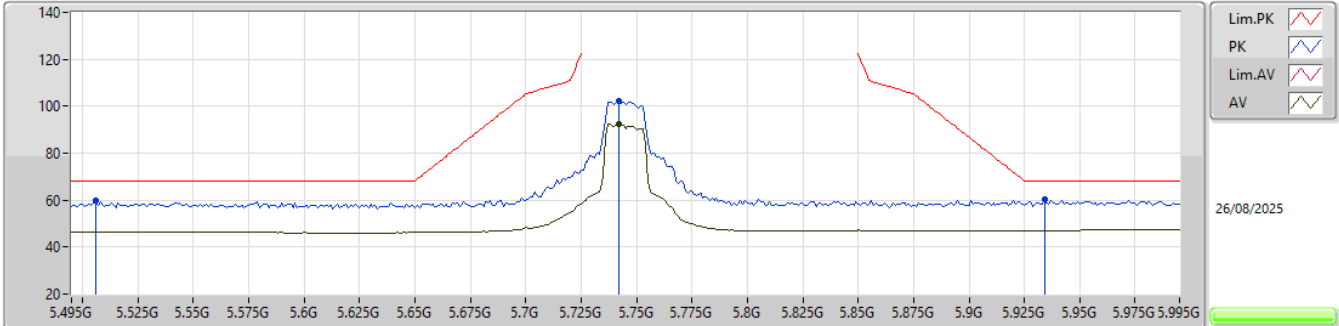


EUT_Z_1TX
Setting 22.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.506G	59.67	68.20	-8.53	52.78	3	Vertical	110.9	1.80	-	33.80	6.90	33.81			
PK	5.742G	102.14	Inf	-Inf	95.14	3	Vertical	110.9	1.80	-	33.68	7.10	33.78			
AV	5.742G	92.23	Inf	-Inf	85.23	3	Vertical	110.9	1.80	-	33.68	7.10	33.78			
PK	5.934G	60.10	68.20	-8.10	52.29	3	Vertical	110.9	1.80	-	34.30	7.27	33.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

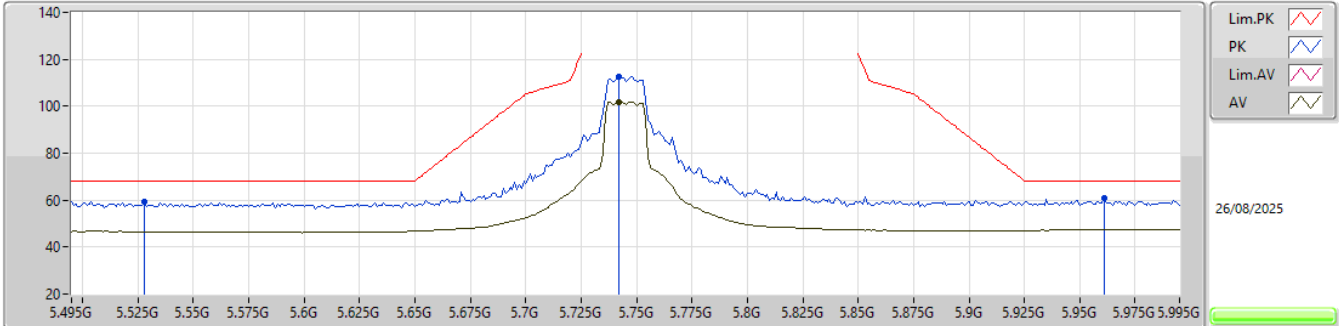


EUT_Z_1TX
Setting 22.5
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.528G	59.30	68.20	-8.90	52.41	3	Horizontal	194	2.96	-	33.80	6.90	33.81			
PK	5.742G	112.44	Inf	-Inf	105.44	3	Horizontal	194	2.96	-	33.68	7.10	33.78			
AV	5.742G	101.86	Inf	-Inf	94.86	3	Horizontal	194	2.96	-	33.68	7.10	33.78			
PK	5.961G	60.77	68.20	-7.43	52.83	3	Horizontal	194	2.96	-	34.40	7.29	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

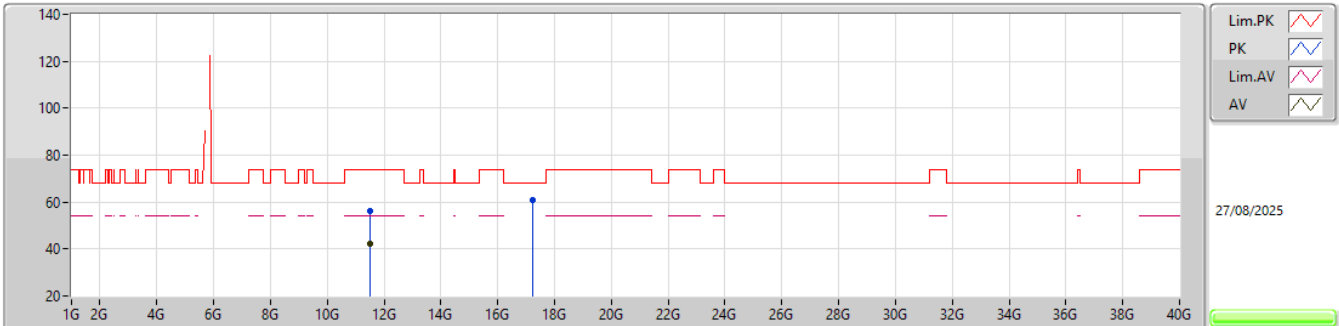


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49243G	56.13	74.00	-17.87	70.78	3	Vertical	168	1.35	-	39.80	11.75	66.20			
AV	11.49005G	42.25	54.00	-11.75	56.90	3	Vertical	168	1.35	-	39.80	11.75	66.20			
PK	17.23729G	61.09	68.20	-7.11	70.78	3	Vertical	60	1.43	-	40.75	13.84	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

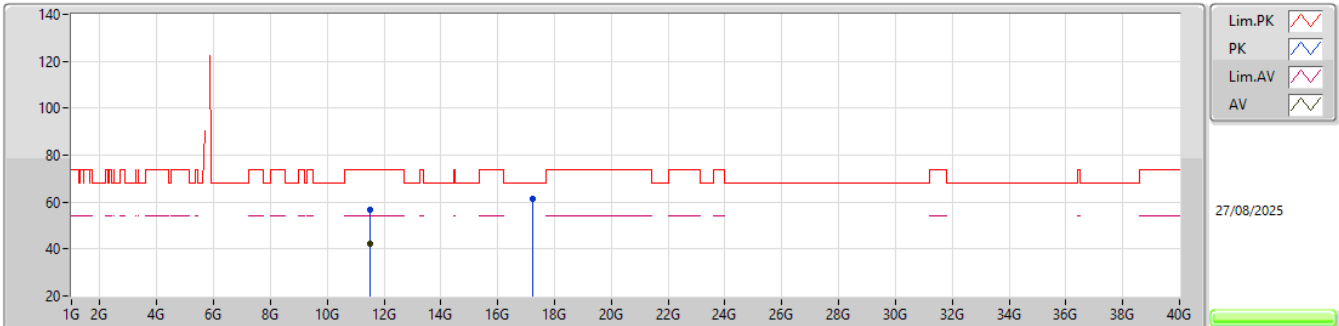


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49228G	56.84	74.00	-17.16	71.49	3	Horizontal	321	1.45	-	39.80	11.75	66.20			
AV	11.48991G	42.18	54.00	-11.82	56.83	3	Horizontal	321	1.45	-	39.80	11.75	66.20			
PK	17.23673G	61.36	68.20	-6.84	71.05	3	Horizontal	202	1.04	-	40.75	13.84	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

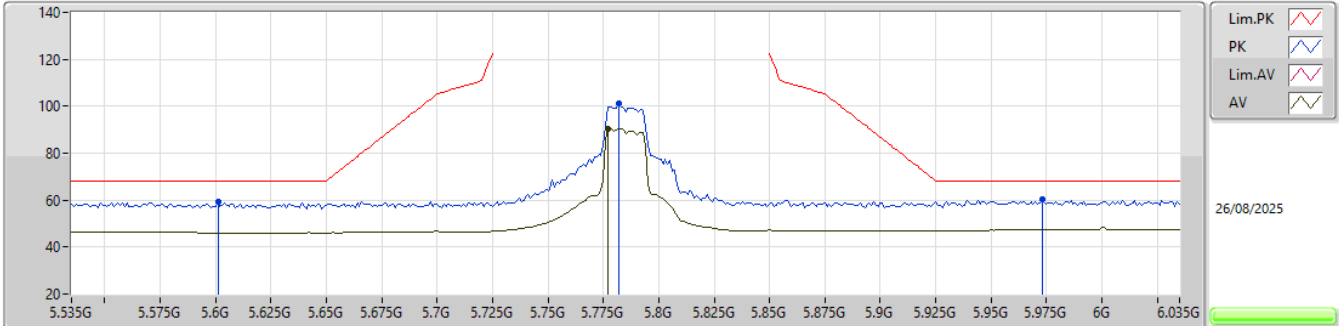


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.601G	59.31	68.20	-8.89	52.60	3	Vertical	113	1.80	-	33.60	6.91	33.80			
PK	5.782G	101.23	Inf	-Inf	94.09	3	Vertical	113	1.80	-	33.76	7.16	33.78			
AV	5.777G	90.40	Inf	-Inf	83.28	3	Vertical	113	1.80	-	33.75	7.15	33.78			
PK	5.973G	60.22	68.20	-7.98	52.27	3	Vertical	113	1.80	-	34.40	7.30	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

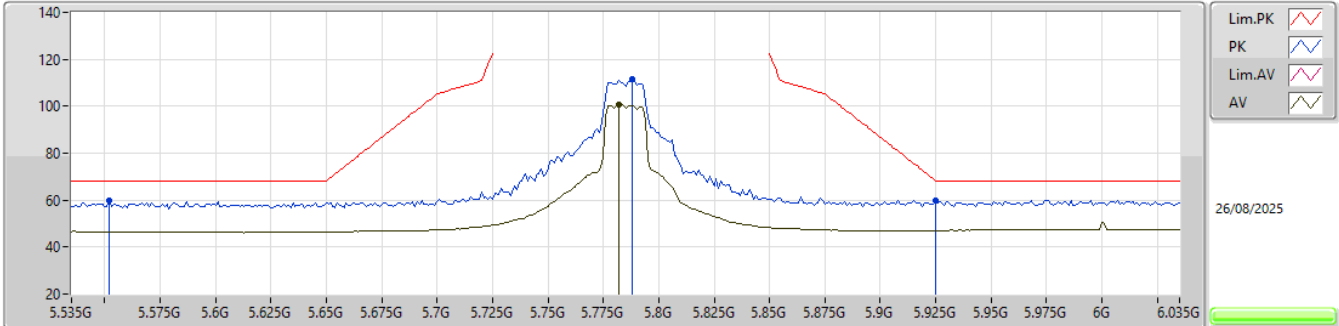


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.552G	59.75	68.20	-8.45	52.86	3	Horizontal	183	2.11	-	33.79	6.90	33.80			
PK	5.788G	111.56	Inf	-Inf	104.40	3	Horizontal	183	2.11	-	33.78	7.16	33.78			
AV	5.782G	100.57	Inf	-Inf	93.43	3	Horizontal	183	2.11	-	33.76	7.16	33.78			
PK	5.925G	59.94	68.20	-8.26	52.18	3	Horizontal	183	2.11	-	34.25	7.27	33.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

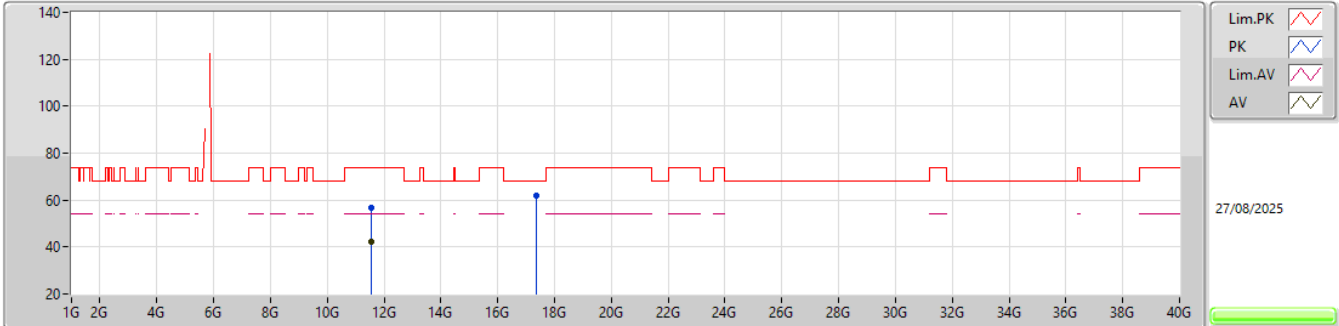


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57072G	56.96	74.00	-17.04	71.68	3	Vertical	91	1.47	-	39.62	11.80	66.14			
AV	11.56827G	42.47	54.00	-11.53	57.18	3	Vertical	91	1.47	-	39.63	11.80	66.14			
PK	17.35565G	62.14	68.20	-6.06	71.08	3	Vertical	154	2.95	-	41.45	13.88	64.27			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

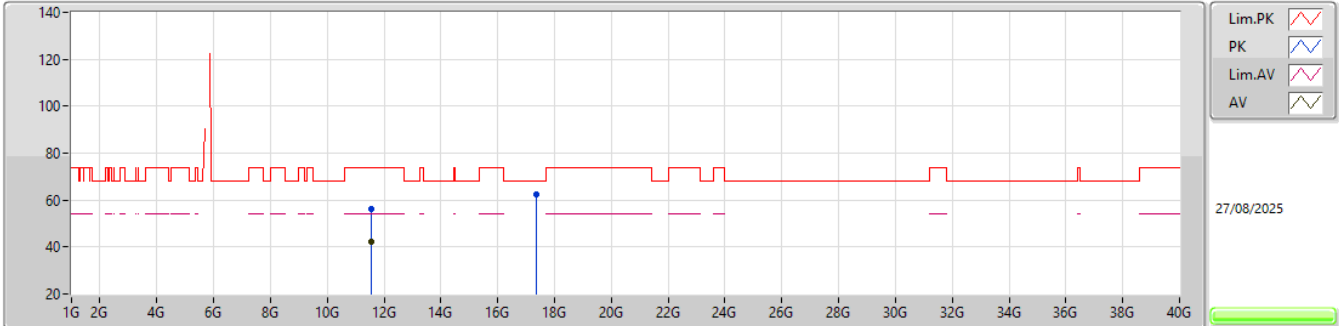


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57106G	56.35	74.00	-17.65	71.07	3	Horizontal	177	1.15	-	39.62	11.80	66.14			
AV	11.56847G	42.32	54.00	-11.68	57.03	3	Horizontal	177	1.15	-	39.63	11.80	66.14			
PK	17.3546G	62.47	68.20	-5.73	71.42	3	Horizontal	22	1.00	-	41.44	13.88	64.27			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

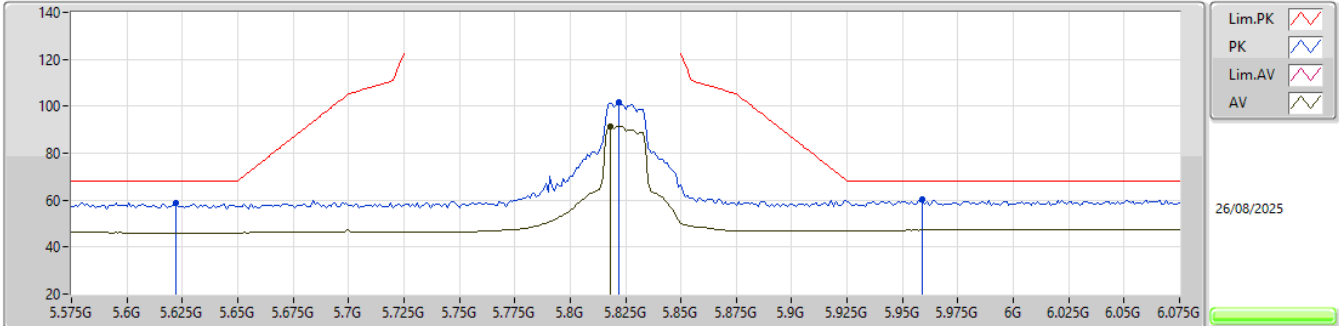


EUT_Z_1TX
Setting 22
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.622G	58.99	68.20	-9.21	52.29	3	Vertical	110	1.80	-	33.56	6.94	33.80				
PK	5.822G	101.67	Inf	-Inf	94.40	3	Vertical	110	1.80	-	33.84	7.20	33.77				
AV	5.818G	91.42	Inf	-Inf	84.16	3	Vertical	110	1.80	-	33.84	7.19	33.77				
PK	5.959G	60.54	68.20	-7.66	52.60	3	Vertical	110	1.80	-	34.40	7.29	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5825MHz_TX

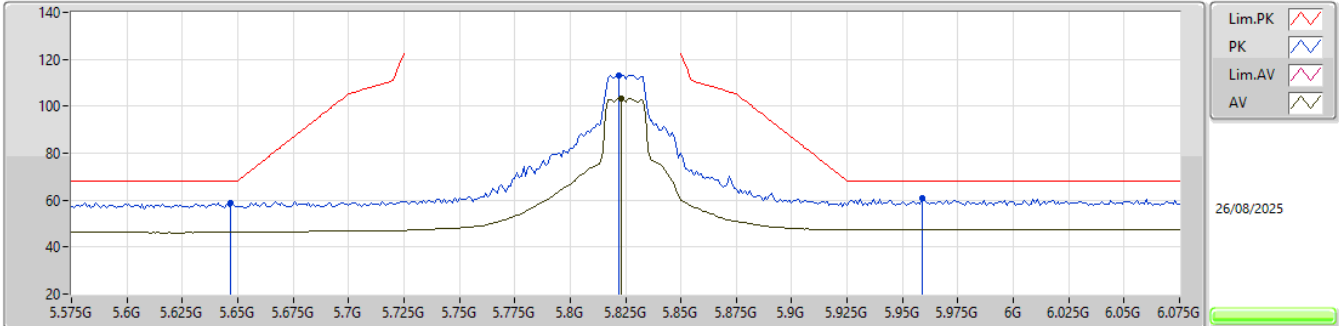EUT_Z_1TX
Setting 22
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.647G	58.89	68.20	-9.31	52.20	3	Horizontal	202	3.00	-	33.51	6.97	33.79			
PK	5.822G	113.24	Inf	-Inf	105.97	3	Horizontal	202	3.00	-	33.84	7.20	33.77			
AV	5.823G	103.22	Inf	-Inf	95.94	3	Horizontal	202	3.00	-	33.85	7.20	33.77			
PK	5.959G	60.74	68.20	-7.46	52.80	3	Horizontal	202	3.00	-	34.40	7.29	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

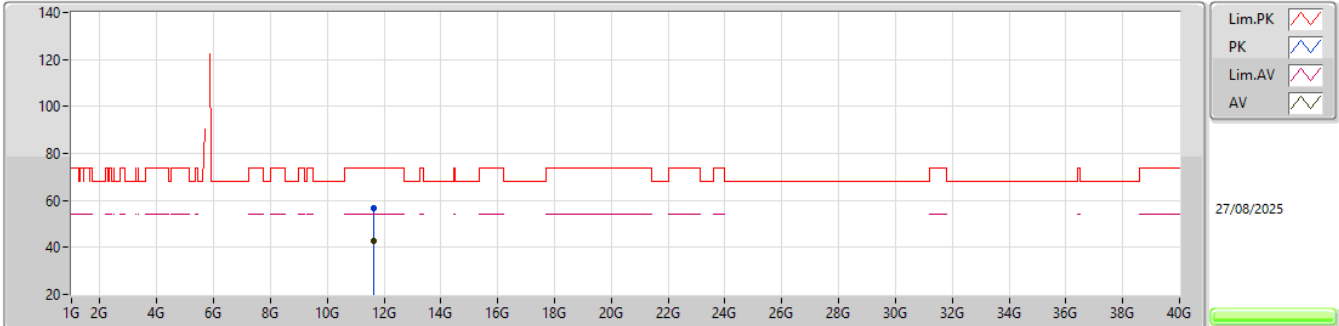


EUT_Z_1TX
Setting 22
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65014G	56.56	74.00	-17.44	71.57	3	Vertical	336	1.81	-	39.20	11.85	66.06			
AV	11.65246G	42.59	54.00	-11.41	57.60	3	Vertical	336	1.81	-	39.20	11.85	66.06			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5825MHz_TX

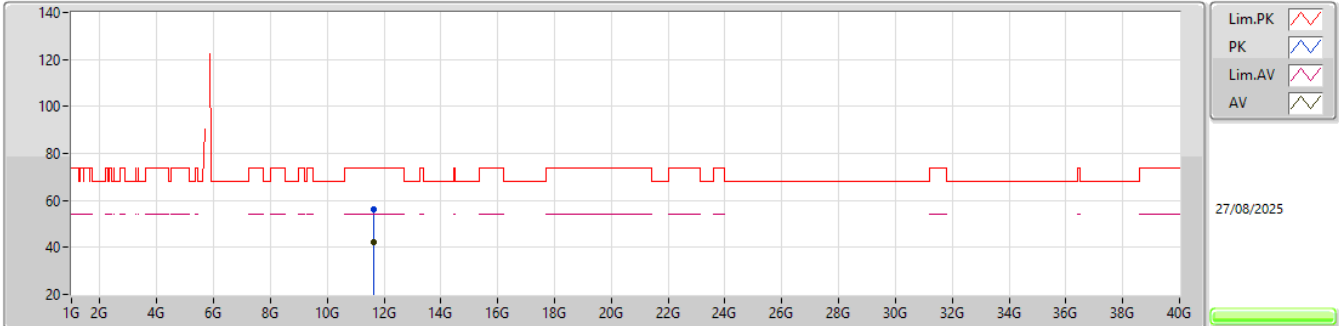EUT_Z_1TX
Setting 22
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64896G	56.33	74.00	-17.67	71.34	3	Horizontal	34	1.84	-	39.21	11.85	66.07			
AV	11.64971G	42.41	54.00	-11.59	57.43	3	Horizontal	34	1.84	-	39.20	11.85	66.07			


5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

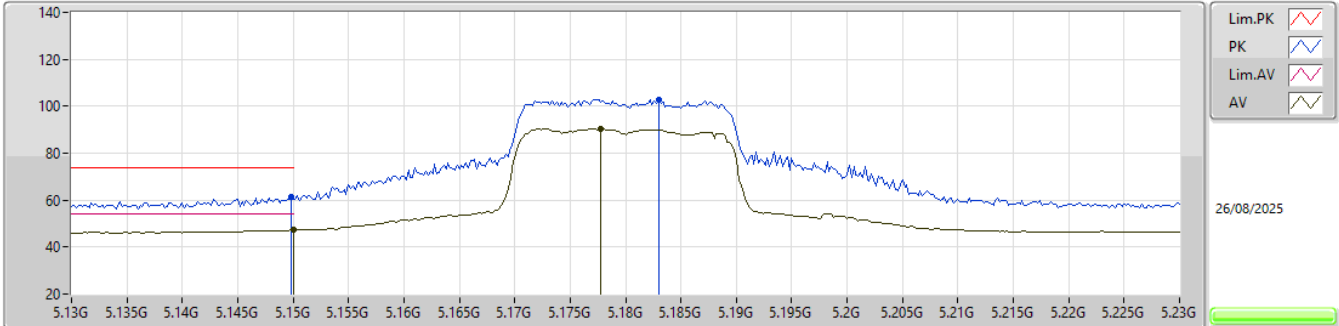

EUT_Z_1TX
Setting 17.5
06-E-S-2-10


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1498G	61.26	74.00	-12.74	54.70	3	Vertical	107	1.93	-	33.50	6.78	33.72			
AV	5.15G	47.29	54.00	-6.71	40.73	3	Vertical	107	1.93	-	33.50	6.78	33.72			
PK	5.183G	102.98	Inf	-Inf	96.25	3	Vertical	107	1.93	-	33.63	6.83	33.73			
AV	5.1778G	90.51	Inf	-Inf	83.81	3	Vertical	107	1.93	-	33.61	6.82	33.73			

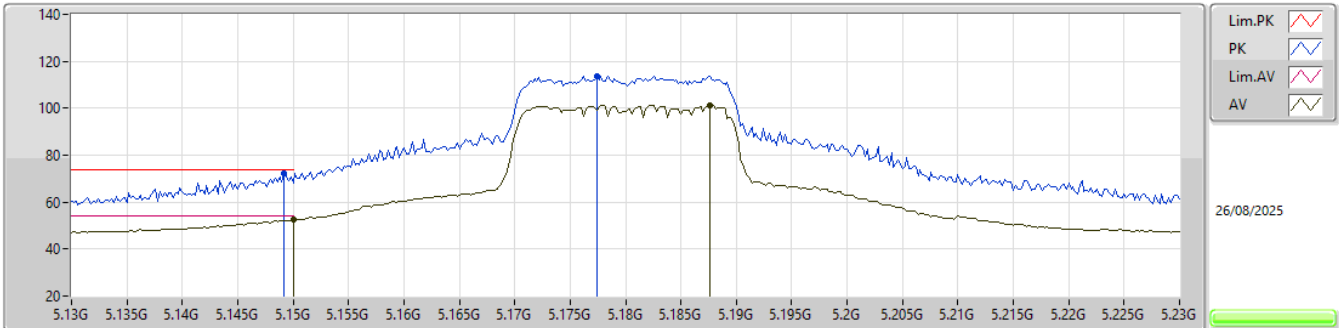5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX
5180MHz_TX

EUT_Z_1TX
Setting 17.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1492G	72.03	74.00	-1.97	65.47	3	Horizontal	203	2.74	-	33.50	6.78	33.72			
AV	5.15G	52.63	54.00	-1.37	46.07	3	Horizontal	203	2.74	-	33.50	6.78	33.72			
PK	5.1774G	113.79	Inf	-Inf	107.09	3	Horizontal	203	2.74	-	33.61	6.82	33.73			
AV	5.1876G	101.15	Inf	-Inf	94.40	3	Horizontal	203	2.74	-	33.65	6.83	33.73			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

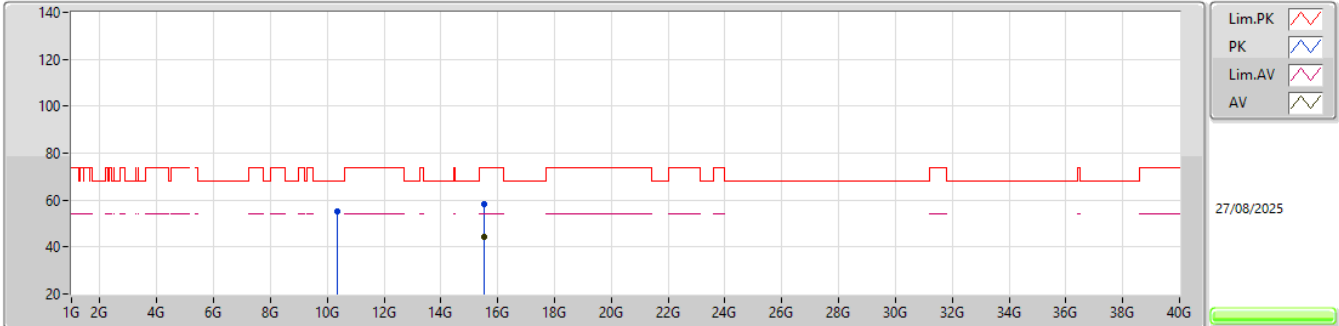
5180MHz_TX

EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35827G	55.23	68.20	-12.97	71.26	3	Vertical	209	2.05	-	39.63	11.01	66.67			
PK	15.5401G	58.07	74.00	-15.93	69.96	3	Vertical	151	1.29	-	38.84	13.10	63.83			
AV	15.5399G	44.48	54.00	-9.52	56.37	3	Vertical	151	1.29	-	38.84	13.10	63.83			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5180MHz_TX

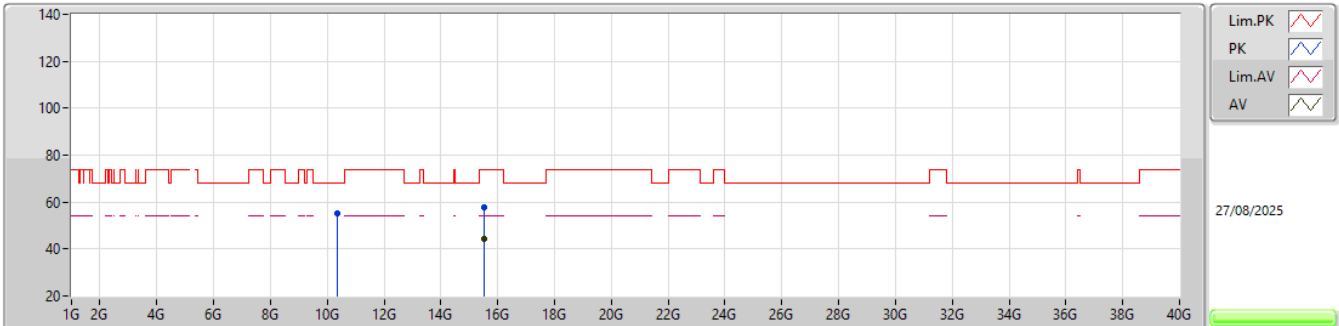EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3591G	55.35	68.20	-12.85	71.37	3	Horizontal	360	1.68	-	39.64	11.01	66.67			
PK	15.54016G	57.95	74.00	-16.05	69.84	3	Horizontal	126	2.70	-	38.84	13.10	63.83			
AV	15.5405G	44.49	54.00	-9.51	56.38	3	Horizontal	126	2.70	-	38.84	13.10	63.83			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5200MHz_TX

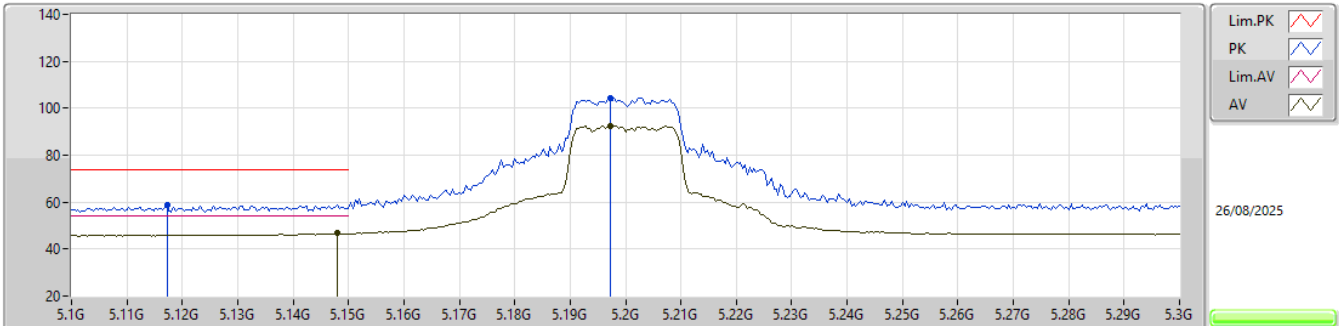EUT_Z_1TX
Setting 20.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1172G	58.70	74.00	-15.30	52.18	3	Vertical	111	1.14	-	33.50	6.73	33.71			
AV	5.148G	46.69	54.00	-7.31	40.14	3	Vertical	111	1.14	-	33.50	6.77	33.72			
PK	5.1972G	104.51	Inf	-Inf	97.70	3	Vertical	111	1.14	-	33.69	6.85	33.73			
AV	5.1972G	92.55	Inf	-Inf	85.74	3	Vertical	111	1.14	-	33.69	6.85	33.73			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

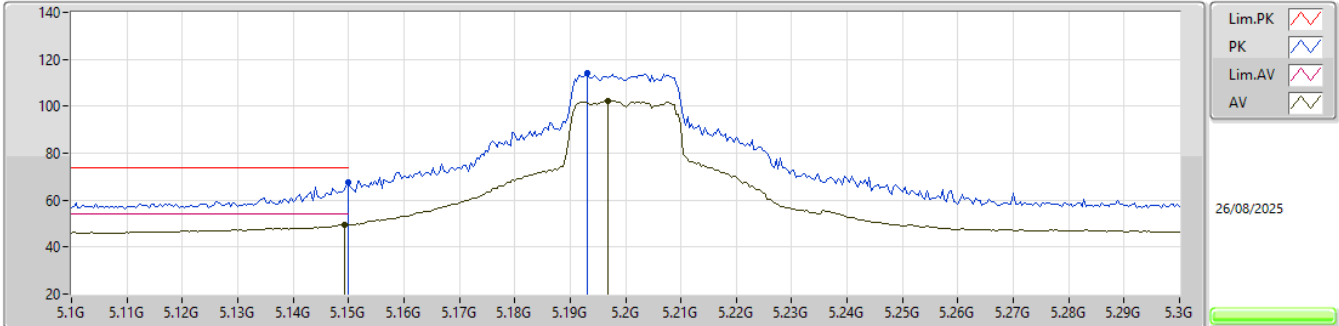


EUT_Z_1TX
Setting 20.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	67.59	74.00	-6.41	61.03	3	Horizontal	201	2.89	-	33.50	6.78	33.72			
AV	5.1492G	49.39	54.00	-4.61	42.83	3	Horizontal	201	2.89	-	33.50	6.78	33.72			
PK	5.1932G	114.01	Inf	-Inf	107.23	3	Horizontal	201	2.89	-	33.67	6.84	33.73			
AV	5.1968G	102.25	Inf	-Inf	95.44	3	Horizontal	201	2.89	-	33.69	6.85	33.73			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

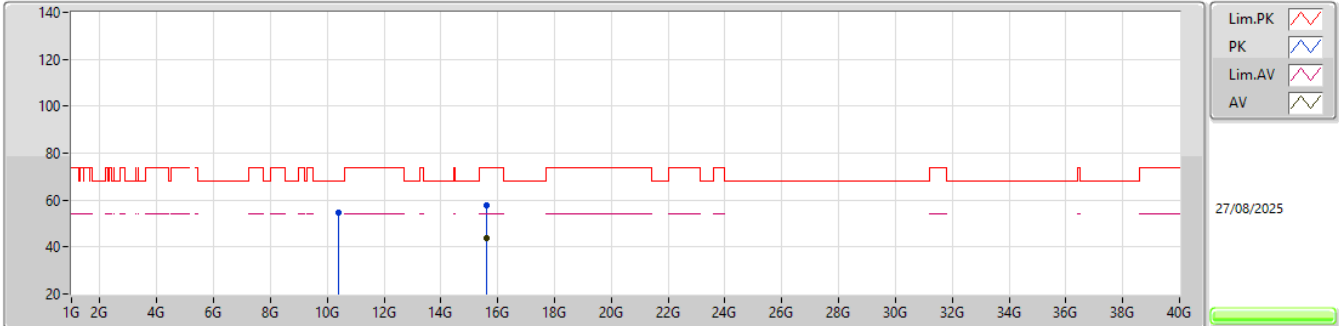


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39925G	54.90	68.20	-13.30	70.75	3	Vertical	149	1.63	-	39.80	11.04	66.69			
PK	15.60132G	57.67	74.00	-16.33	69.79	3	Vertical	42	1.84	-	38.59	13.14	63.85			
AV	15.5979G	43.98	54.00	-10.02	56.08	3	Vertical	42	1.84	-	38.61	13.14	63.85			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

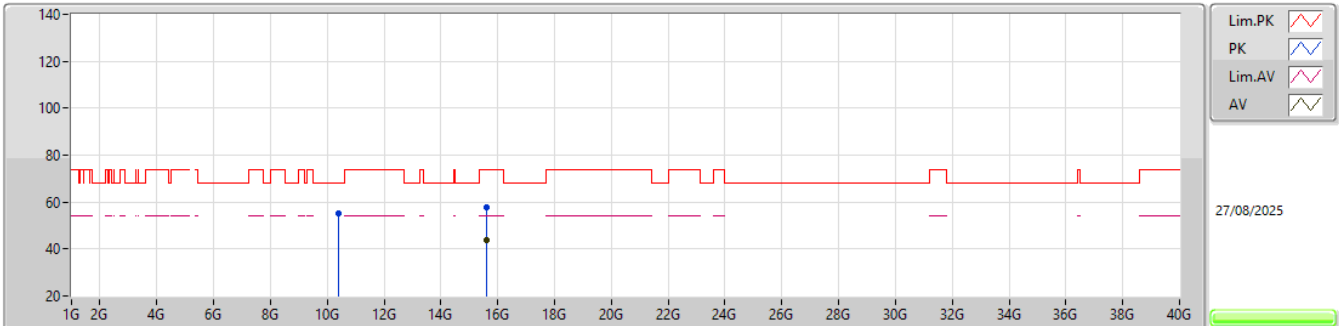


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40007G	55.03	68.20	-13.17	70.88	3	Horizontal	123	1.39	-	39.80	11.04	66.69			
PK	15.60071G	57.75	74.00	-16.25	69.86	3	Horizontal	353	2.82	-	38.60	13.14	63.85			
AV	15.59778G	43.77	54.00	-10.23	55.87	3	Horizontal	353	2.82	-	38.61	13.14	63.85			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

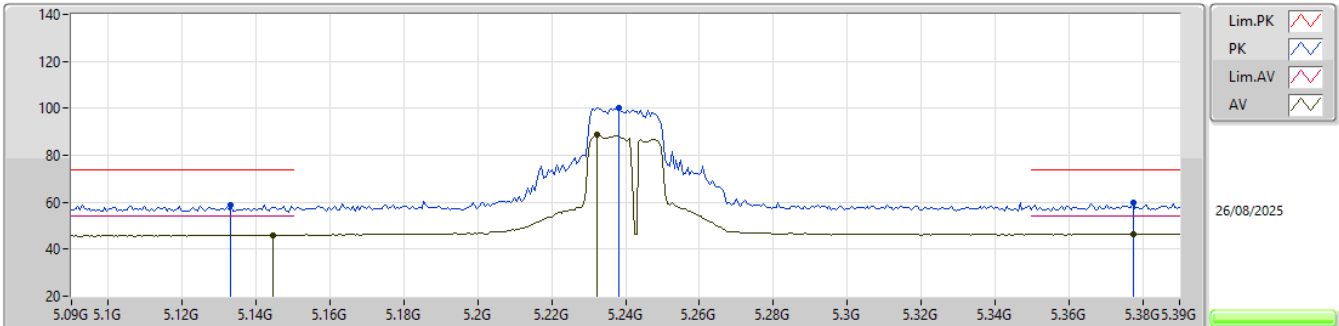EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1332G	58.96	74.00	-15.04	52.42	3	Vertical	110	2.12	-	33.50	6.75	33.71			
AV	5.1446G	46.05	54.00	-7.95	39.50	3	Vertical	110	2.12	-	33.50	6.77	33.72			
PK	5.2382G	100.18	Inf	-Inf	93.28	3	Vertical	110	2.12	-	33.78	6.86	33.74			
AV	5.2322G	88.64	Inf	-Inf	81.77	3	Vertical	110	2.12	-	33.76	6.85	33.74			
PK	5.3774G	59.75	74.00	-14.25	52.84	3	Vertical	110	2.12	-	33.81	6.88	33.78			
AV	5.3774G	46.63	54.00	-7.37	39.72	3	Vertical	110	2.12	-	33.81	6.88	33.78			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

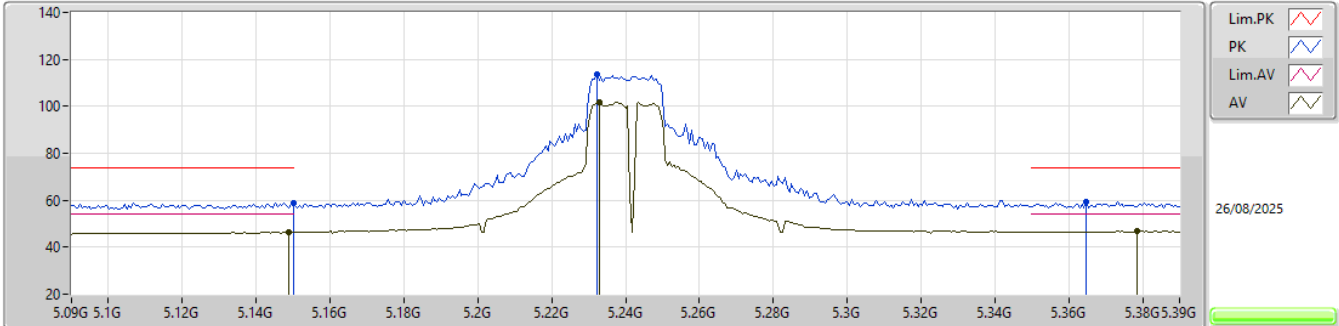


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	58.98	74.00	-15.02	52.42	3	Horizontal	204	2.84	-	33.50	6.78	33.72			
AV	5.1488G	46.46	54.00	-7.54	39.90	3	Horizontal	204	2.84	-	33.50	6.78	33.72			
PK	5.2322G	113.39	Inf	-Inf	106.52	3	Horizontal	204	2.84	-	33.76	6.85	33.74			
AV	5.2328G	101.56	Inf	-Inf	94.68	3	Horizontal	204	2.84	-	33.77	6.85	33.74			
PK	5.3648G	59.36	74.00	-14.64	52.50	3	Horizontal	204	2.84	-	33.76	6.87	33.77			
AV	5.3786G	46.79	54.00	-7.21	39.88	3	Horizontal	204	2.84	-	33.81	6.88	33.78			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

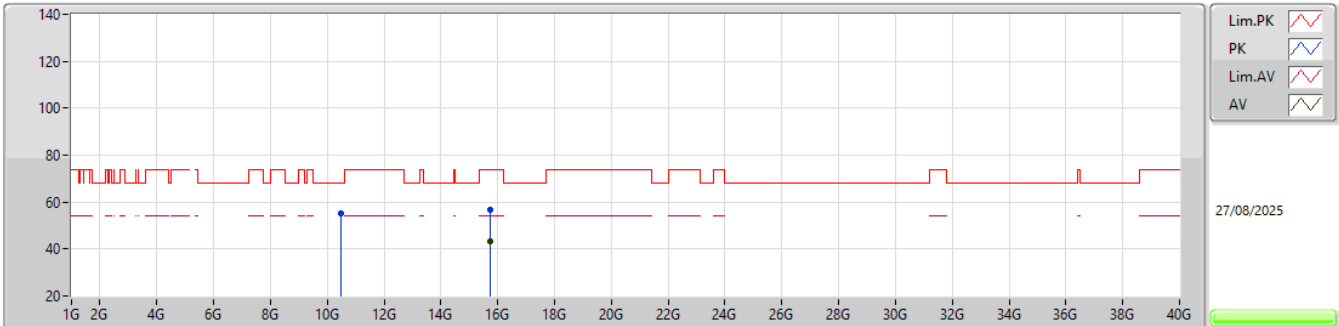EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48176G	55.11	68.20	-13.09	70.84	3	Vertical	51	1.57	-	39.90	11.09	66.72			
PK	15.71855G	56.90	74.00	-17.10	69.03	3	Vertical	194	1.72	-	38.54	13.22	63.89			
AV	15.72105G	43.23	54.00	-10.77	55.36	3	Vertical	194	1.72	-	38.54	13.22	63.89			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

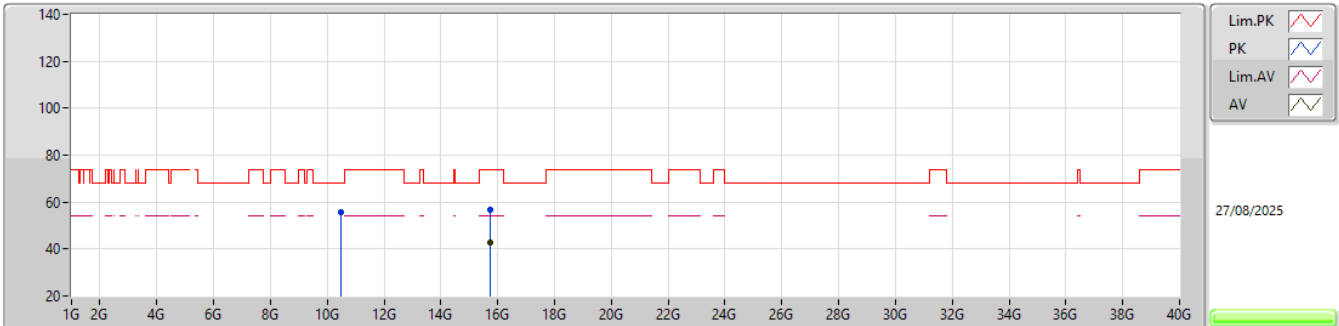EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47848G	55.57	68.20	-12.63	71.30	3	Horizontal	234	1.60	-	39.90	11.09	66.72			
PK	15.71776G	56.74	74.00	-17.26	68.87	3	Horizontal	188	1.77	-	38.54	13.22	63.89			
AV	15.71778G	42.92	54.00	-11.08	55.05	3	Horizontal	188	1.77	-	38.54	13.22	63.89			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

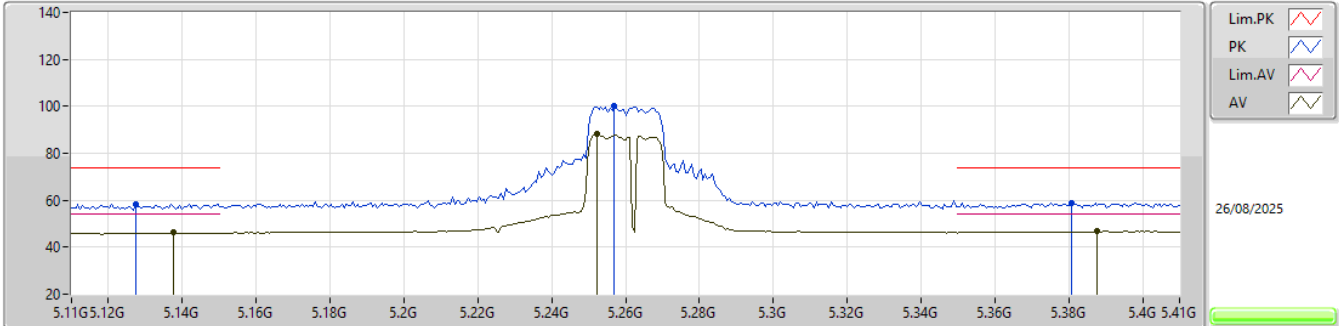


EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1274G	58.49	74.00	-15.51	51.96	3	Vertical	112	2.33	-	33.50	6.74	33.71			
AV	5.1376G	46.17	54.00	-7.83	39.63	3	Vertical	112	2.33	-	33.50	6.76	33.72			
PK	5.257G	100.31	Inf	-Inf	93.39	3	Vertical	112	2.33	-	33.81	6.86	33.75			
AV	5.2522G	88.09	Inf	-Inf	81.18	3	Vertical	112	2.33	-	33.80	6.86	33.75			
PK	5.3806G	58.95	74.00	-15.05	52.03	3	Vertical	112	2.33	-	33.82	6.88	33.78			
AV	5.3878G	46.74	54.00	-7.26	39.79	3	Vertical	112	2.33	-	33.85	6.88	33.78			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

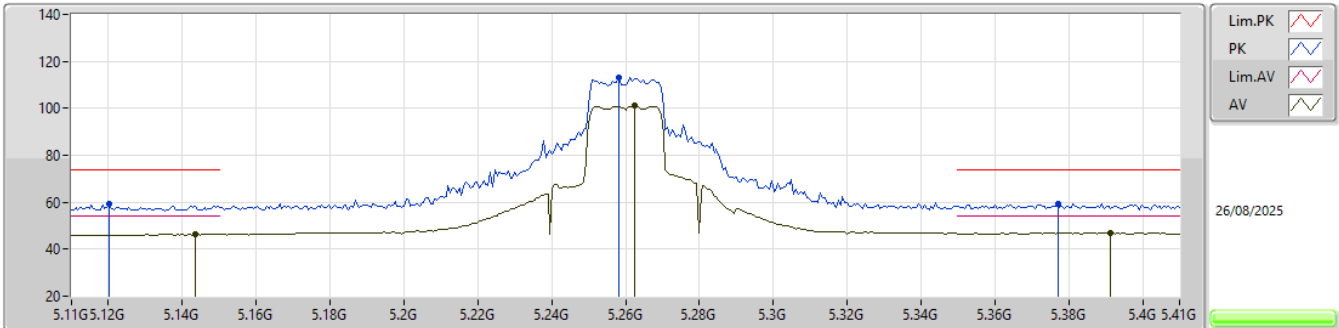EUT_Z_1TX
Setting 19.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1202G	59.34	74.00	-14.66	52.82	3	Horizontal	199	2.82	-	33.50	6.73	33.71			
AV	5.1436G	46.31	54.00	-7.69	39.76	3	Horizontal	199	2.82	-	33.50	6.77	33.72			
PK	5.2582G	113.08	Inf	-Inf	106.15	3	Horizontal	199	2.82	-	33.82	6.86	33.75			
AV	5.2624G	101.40	Inf	-Inf	94.47	3	Horizontal	199	2.82	-	33.82	6.86	33.75			
PK	5.377G	59.49	74.00	-14.51	52.58	3	Horizontal	199	2.82	-	33.81	6.88	33.78			
AV	5.3914G	46.97	54.00	-7.03	40.00	3	Horizontal	199	2.82	-	33.87	6.88	33.78			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

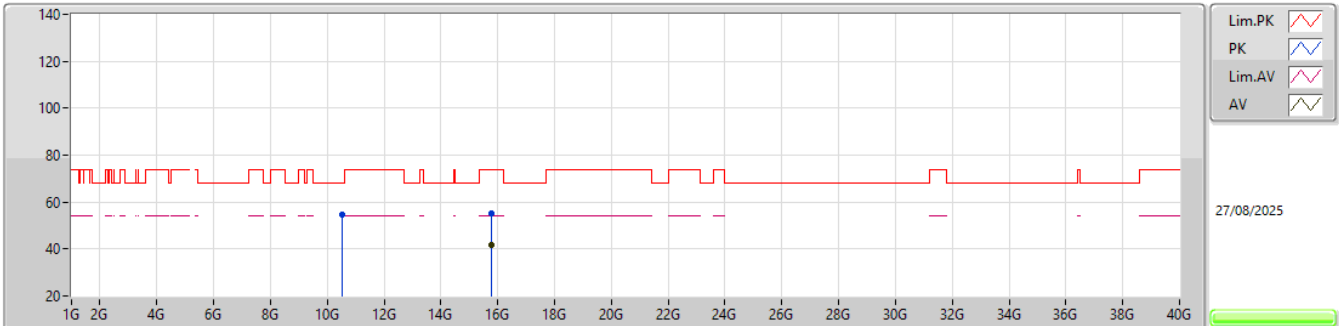EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51759G	54.72	68.20	-13.48	70.45	3	Vertical	315	2.87	-	39.86	11.12	66.71			
PK	15.77774G	54.93	74.00	-19.07	67.21	3	Vertical	357	2.98	-	38.38	13.26	63.92			
AV	15.77925G	41.59	54.00	-12.41	53.87	3	Vertical	357	2.98	-	38.37	13.27	63.92			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

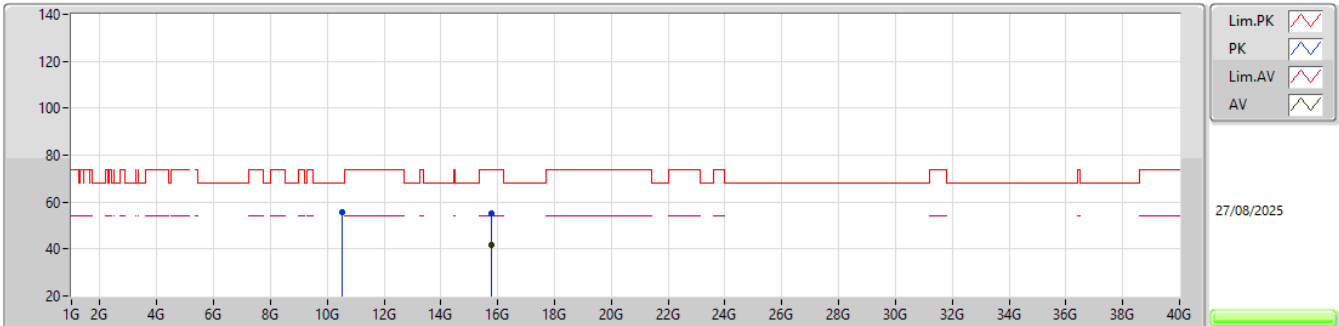


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5191G	55.83	68.20	-12.37	71.56	3	Horizontal	170	1.58	-	39.86	11.12	66.71			
PK	15.78039G	54.98	74.00	-19.02	67.27	3	Horizontal	125	2.61	-	38.36	13.27	63.92			
AV	15.78183G	41.79	54.00	-12.21	54.09	3	Horizontal	125	2.61	-	38.35	13.27	63.92			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5300MHz_TX

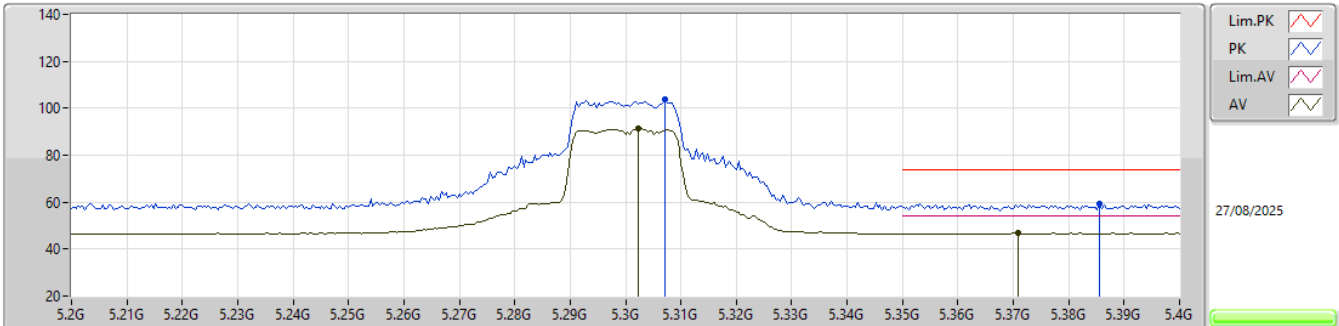EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3072G	103.61	Inf	-Inf	96.63	3	Vertical	123	2.65	-	33.87	6.87	33.76			
AV	5.3024G	91.62	Inf	-Inf	84.62	3	Vertical	123	2.65	-	33.89	6.87	33.76			
PK	5.3856G	59.12	74.00	-14.88	52.18	3	Vertical	123	2.65	-	33.84	6.88	33.78			
AV	5.3708G	46.72	54.00	-7.28	39.84	3	Vertical	123	2.65	-	33.78	6.88	33.78			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

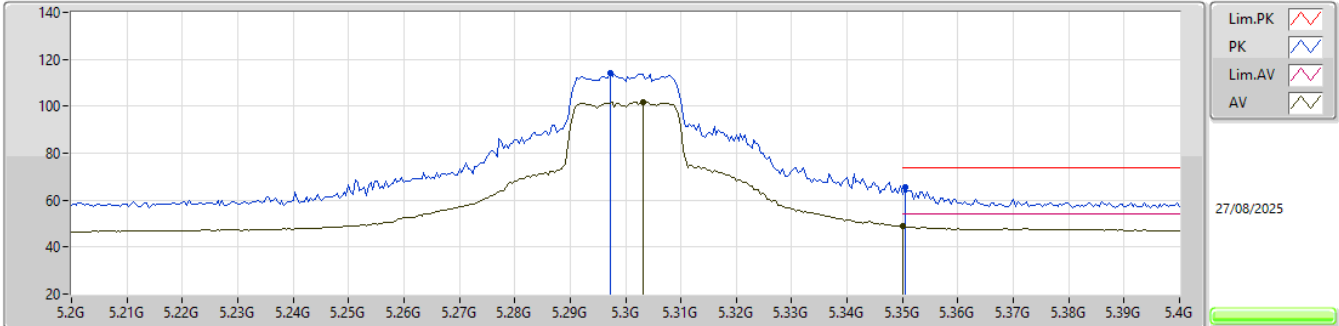


EUT_Z_1TX
Setting 20
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2972G	113.99	Inf	-Inf	107.00	3	Horizontal	23	1.05	-	33.89	6.86	33.76				
AV	5.3032G	101.77	Inf	-Inf	94.77	3	Horizontal	23	1.05	-	33.89	6.87	33.76				
PK	5.3504G	65.35	74.00	-8.65	58.55	3	Horizontal	23	1.05	-	33.70	6.87	33.77				
AV	5.35G	48.87	54.00	-5.13	42.07	3	Horizontal	23	1.05	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5300MHz_TX

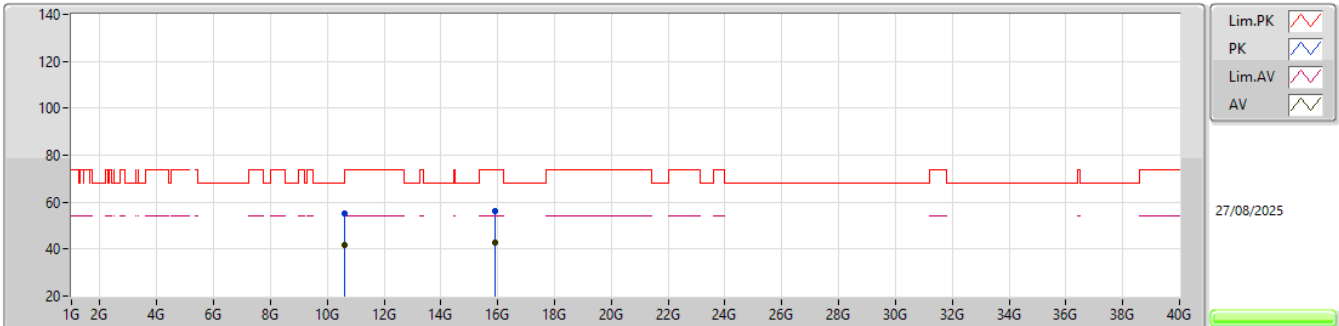EUT_Z_1TX
Setting 20
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60091G	55.43	74.00	-18.57	70.98	3	Vertical	7	1.05	-	39.90	11.17	66.62			
AV	10.60091G	41.81	54.00	-12.19	57.36	3	Vertical	7	1.05	-	39.90	11.17	66.62			
PK	15.90176G	56.16	74.00	-17.84	68.68	3	Vertical	266	1.93	-	38.09	13.35	63.96			
AV	15.90229G	42.54	54.00	-11.46	55.06	3	Vertical	266	1.93	-	38.09	13.35	63.96			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

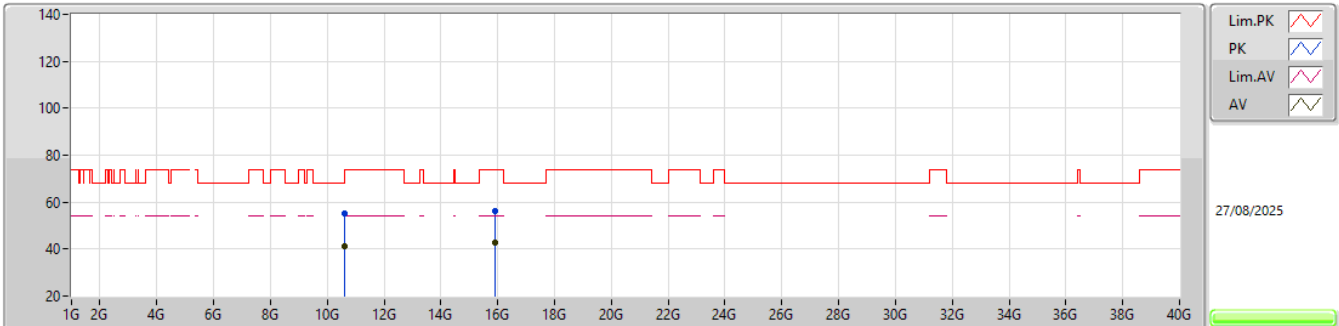


EUT_Z_1TX
Setting 20
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.6015G	55.09	74.00	-18.91	70.64	3	Horizontal	67	1.57	-	39.90	11.17	66.62				
AV	10.60115G	41.41	54.00	-12.59	56.96	3	Horizontal	67	1.57	-	39.90	11.17	66.62				
PK	15.89981G	56.43	74.00	-17.57	68.94	3	Horizontal	11	1.10	-	38.10	13.35	63.96				
AV	15.90199G	42.81	54.00	-11.19	55.33	3	Horizontal	11	1.10	-	38.09	13.35	63.96				

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

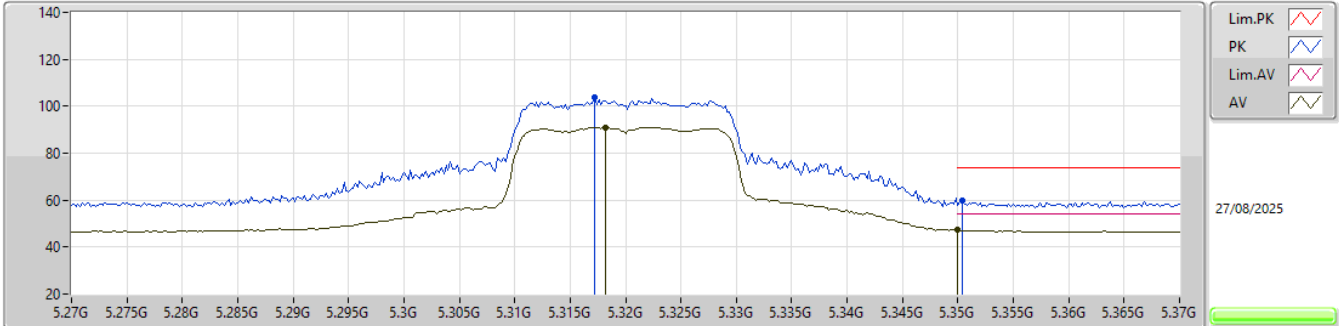


EUT_Z_1TX
Setting 17.5
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3172G	103.66	Inf	-Inf	96.72	3	Vertical	119	2.51	-	33.83	6.87	33.76			
AV	5.3182G	91.10	Inf	-Inf	84.16	3	Vertical	119	2.51	-	33.83	6.87	33.76			
PK	5.3504G	59.65	74.00	-14.35	52.85	3	Vertical	119	2.51	-	33.70	6.87	33.77			
AV	5.35G	47.22	54.00	-6.78	40.42	3	Vertical	119	2.51	-	33.70	6.87	33.77			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

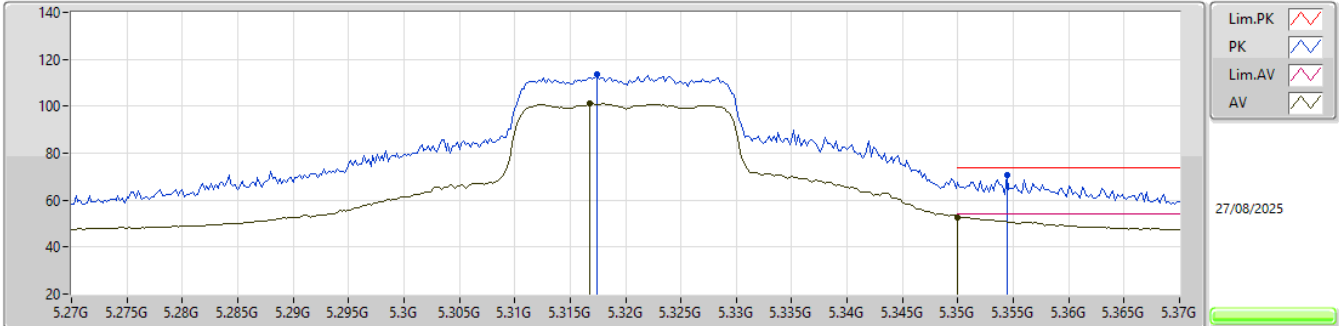


EUT_Z_1TX
Setting 17.5
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3174G	113.59	Inf	-Inf	106.65	3	Horizontal	24	1.01	-	33.83	6.87	33.76				
AV	5.3168G	101.11	Inf	-Inf	94.17	3	Horizontal	24	1.01	-	33.83	6.87	33.76				
PK	5.3544G	70.69	74.00	-3.31	63.87	3	Horizontal	24	1.01	-	33.72	6.87	33.77				
AV	5.35G	52.80	54.00	-1.20	46.00	3	Horizontal	24	1.01	-	33.70	6.87	33.77				

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

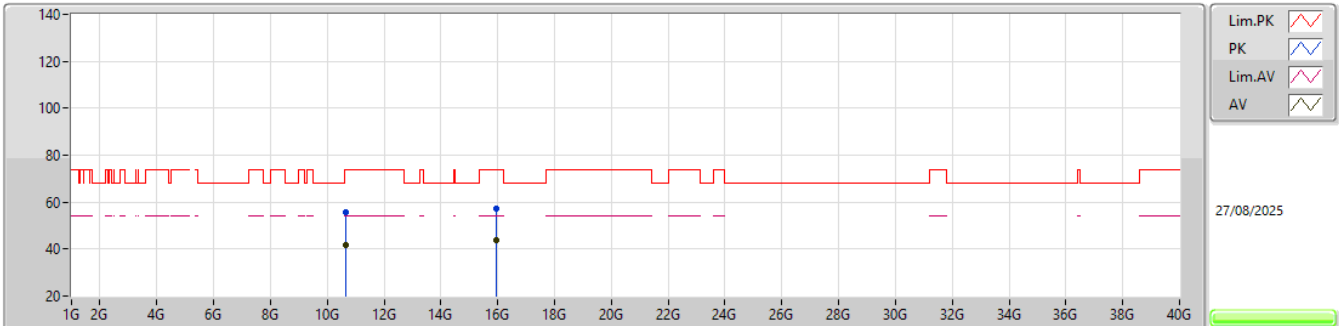


EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64241G	55.65	74.00	-18.35	71.13	3	Vertical	17	1.45	-	39.90	11.20	66.58			
AV	10.64064G	41.71	54.00	-12.29	57.19	3	Vertical	17	1.45	-	39.90	11.20	66.58			
PK	15.95818G	57.44	74.00	-16.56	70.15	3	Vertical	301	2.83	-	37.88	13.39	63.98			
AV	15.96042G	43.57	54.00	-10.43	56.28	3	Vertical	301	2.83	-	37.88	13.39	63.98			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

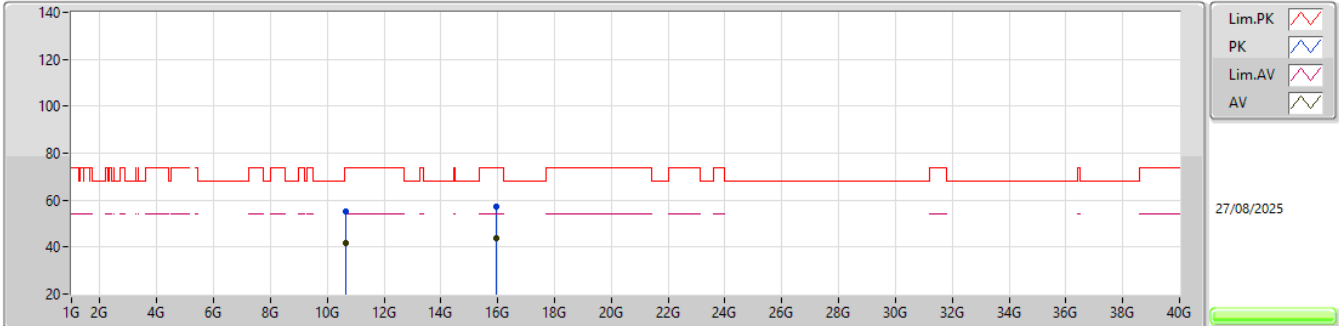


EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63876G	55.18	74.00	-18.82	70.66	3	Horizontal	12	2.17	-	39.90	11.20	66.58			
AV	10.63792G	41.49	54.00	-12.51	56.98	3	Horizontal	12	2.17	-	39.90	11.19	66.58			
PK	15.96236G	57.13	74.00	-16.87	69.85	3	Horizontal	147	1.67	-	37.88	13.39	63.99			
AV	15.9597G	43.72	54.00	-10.28	56.43	3	Horizontal	147	1.67	-	37.88	13.39	63.98			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

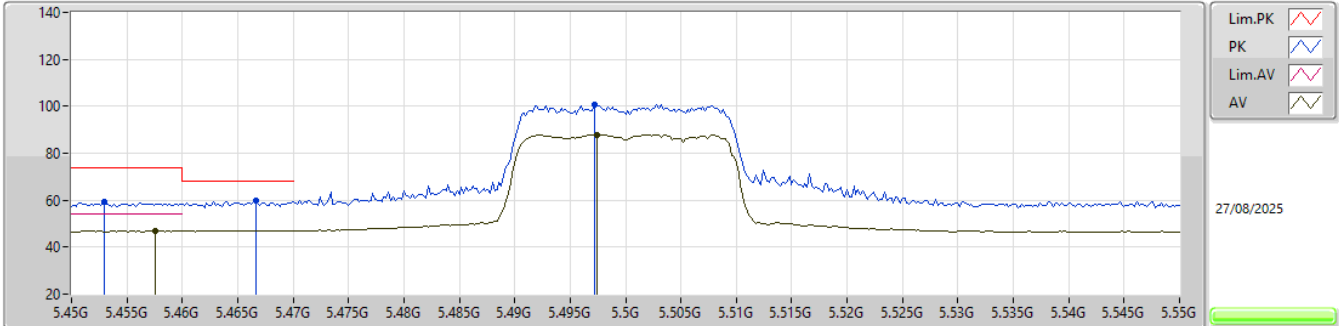


EUT_Z_1TX
Setting 15
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.453G	59.32	74.00	-14.68	52.34	3	Vertical	120.9	2.50	-	33.89	6.89	33.80			
AV	5.4576G	46.94	54.00	-7.06	39.97	3	Vertical	120.9	2.50	-	33.88	6.89	33.80			
PK	5.4666G	59.94	68.20	-8.26	52.98	3	Vertical	120.9	2.50	-	33.87	6.89	33.80			
PK	5.4972G	100.79	Inf	-Inf	93.90	3	Vertical	120.9	2.50	-	33.81	6.89	33.81			
AV	5.4974G	87.98	Inf	-Inf	81.09	3	Vertical	120.9	2.50	-	33.81	6.89	33.81			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

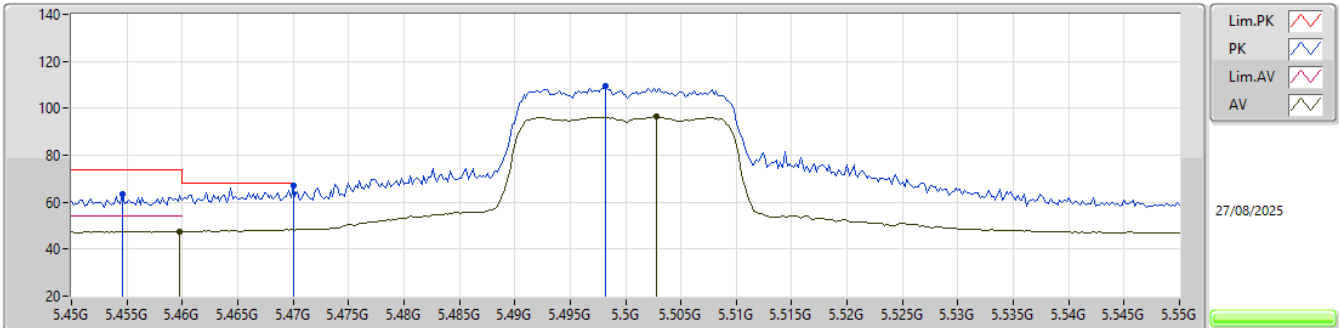


EUT_Z_1TX
Setting 15
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4546G	63.26	74.00	-10.74	56.28	3	Horizontal	182	2.38	-	33.89	6.89	33.80			
AV	5.4598G	47.66	54.00	-6.34	40.69	3	Horizontal	182	2.38	-	33.88	6.89	33.80			
PK	5.47G	67.03	68.20	-1.17	60.08	3	Horizontal	182	2.38	-	33.86	6.89	33.80			
PK	5.4982G	109.50	Inf	-Inf	102.62	3	Horizontal	182	2.38	-	33.80	6.89	33.81			
AV	5.5028G	96.43	Inf	-Inf	89.54	3	Horizontal	182	2.38	-	33.80	6.90	33.81			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

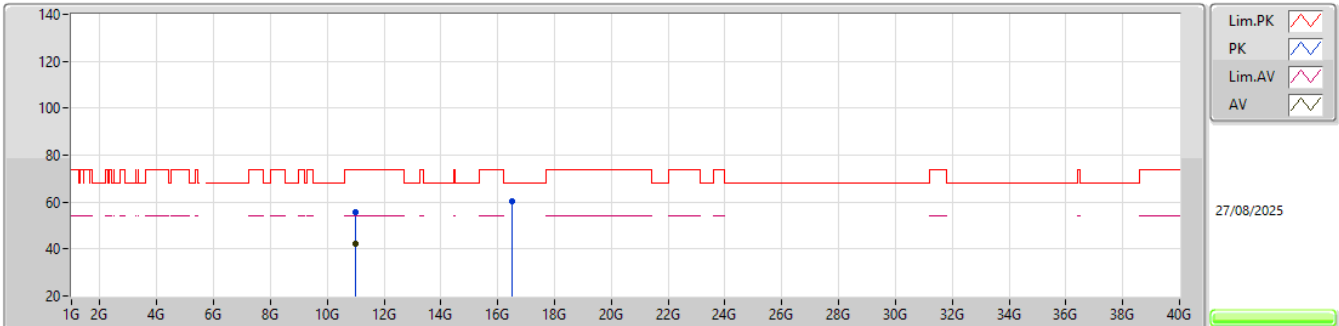


EUT_Z_1TX
Setting 15
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00178G	55.93	74.00	-18.07	70.50	3	Vertical	139	1.71	-	40.19	11.43	66.19			
AV	10.99988G	42.36	54.00	-11.64	56.92	3	Vertical	139	1.71	-	40.20	11.43	66.19			
PK	16.49826G	60.16	68.20	-8.04	70.32	3	Vertical	338	2.81	-	39.99	13.59	63.74			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5500MHz_TX

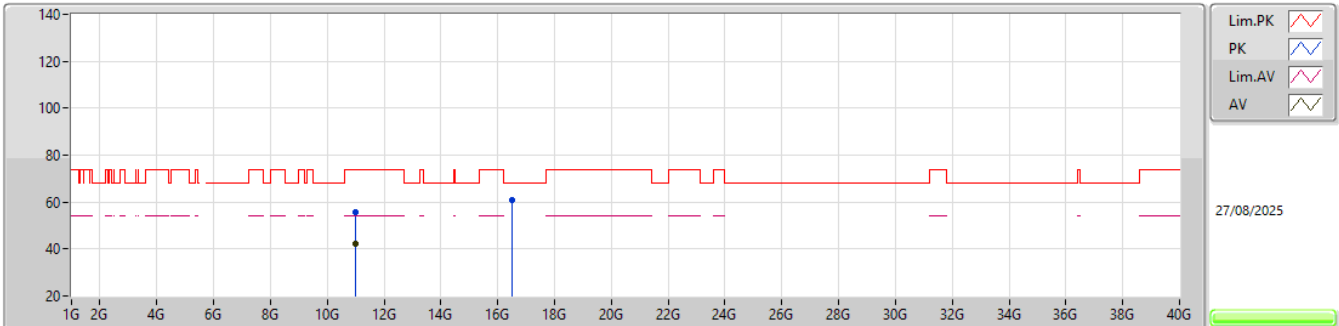EUT_Z_1TX
Setting 15
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00098G	55.57	74.00	-18.43	70.13	3	Horizontal	160	1.01	-	40.20	11.43	66.19			
AV	10.99939G	42.11	54.00	-11.89	56.67	3	Horizontal	160	1.01	-	40.20	11.43	66.19			
PK	16.50241G	60.84	68.20	-7.36	71.00	3	Horizontal	144	2.14	-	39.99	13.59	63.74			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

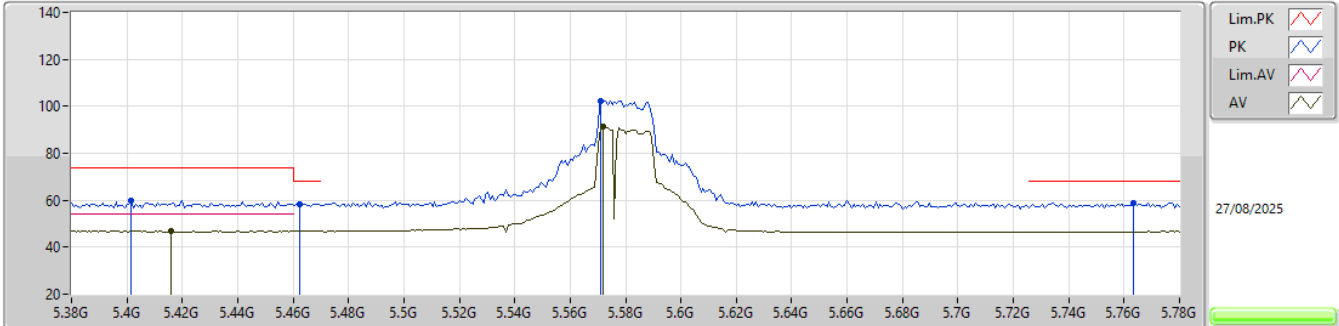


EUT_Z_1TX
Setting 20.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4016G	59.85	74.00	-14.15	52.85	3	Vertical	122	2.46	-	33.90	6.88	33.78
AV	5.416G	46.91	54.00	-7.09	39.92	3	Vertical	122	2.46	-	33.90	6.88	33.79
PK	5.4624G	58.34	68.20	-9.86	51.37	3	Vertical	122	2.46	-	33.88	6.89	33.80
PK	5.5712G	102.42	Inf	-Inf	95.59	3	Vertical	122	2.46	-	33.72	6.91	33.80
AV	5.572G	91.23	Inf	-Inf	84.41	3	Vertical	122	2.46	-	33.71	6.91	33.80
PK	5.7632G	58.75	68.20	-9.45	51.67	3	Vertical	122	2.46	-	33.73	7.13	33.78

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5580MHz_TX

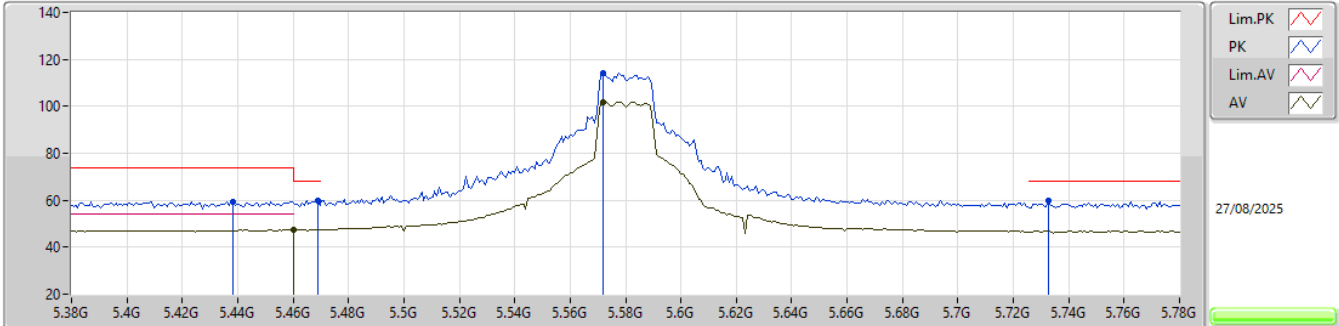EUT_Z_1TX
Setting 20.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4384G	59.51	74.00	-14.49	52.51	3	Horizontal	205	2.69	-	33.90	6.89	33.79			
PK	5.4688G	59.78	68.20	-8.42	52.83	3	Horizontal	205	2.69	-	33.86	6.89	33.80			
AV	5.46G	47.44	54.00	-6.56	40.47	3	Horizontal	205	2.69	-	33.88	6.89	33.80			
PK	5.572G	114.10	Inf	-Inf	107.28	3	Horizontal	205	2.69	-	33.71	6.91	33.80			
AV	5.572G	101.77	Inf	-Inf	94.95	3	Horizontal	205	2.69	-	33.71	6.91	33.80			
PK	5.7328G	59.82	68.20	-8.38	52.84	3	Horizontal	205	2.69	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

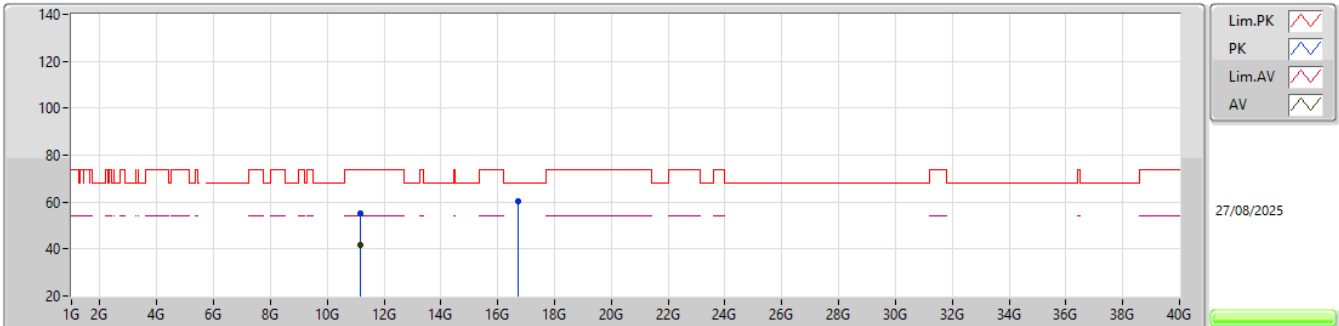


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15883G	55.34	74.00	-18.66	70.52	3	Vertical	311	2.63	-	39.48	11.53	66.19			
AV	11.15927G	41.82	54.00	-12.18	57.00	3	Vertical	311	2.63	-	39.48	11.53	66.19			
PK	16.7402G	60.55	68.20	-7.65	70.64	3	Vertical	336	2.78	-	40.24	13.67	64.00			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

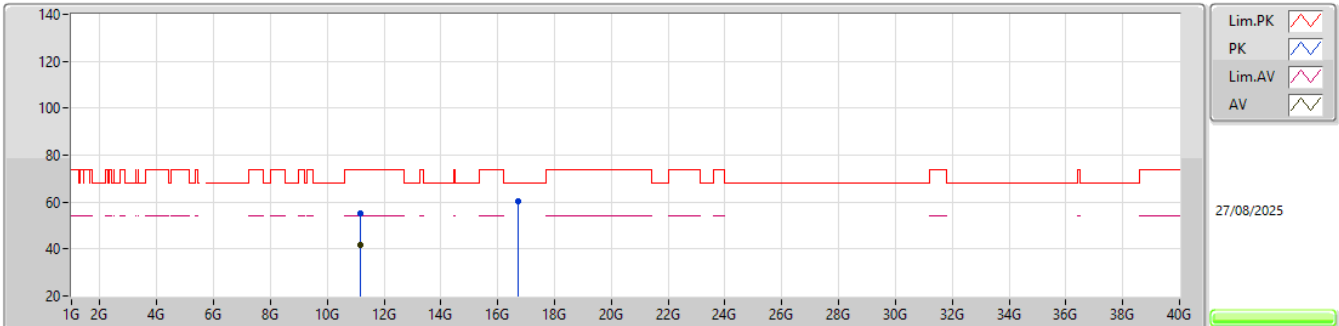


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15893G	55.43	74.00	-18.57	70.61	3	Horizontal	322	2.89	-	39.48	11.53	66.19			
AV	11.15939G	41.89	54.00	-12.11	57.07	3	Horizontal	322	2.89	-	39.48	11.53	66.19			
PK	16.7387G	60.47	68.20	-7.73	70.57	3	Horizontal	257	1.64	-	40.23	13.67	64.00			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

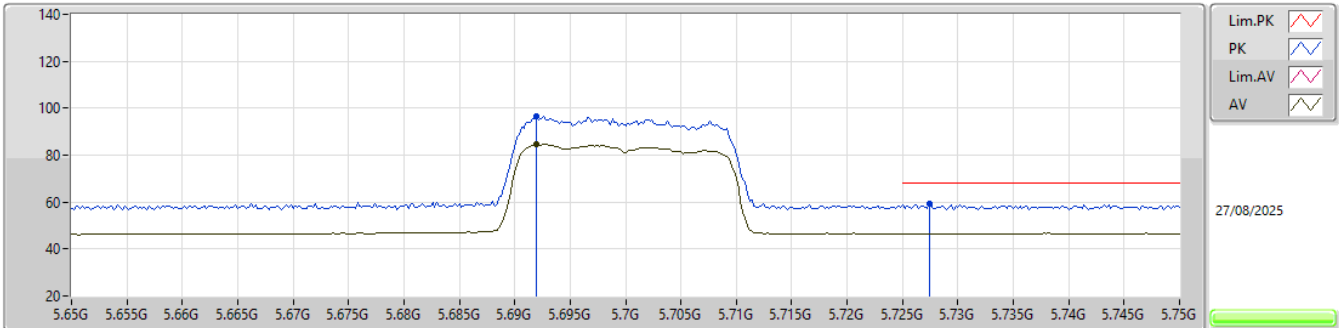


EUT_Z_1TX
Setting 15
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.692G	96.44	Inf	-Inf	89.62	3	Vertical	119	2.40	-	33.58	7.03	33.79			
AV	5.692G	84.60	Inf	-Inf	77.78	3	Vertical	119	2.40	-	33.58	7.03	33.79			
PK	5.7274G	59.20	68.20	-9.00	52.25	3	Vertical	119	2.40	-	33.65	7.08	33.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TX

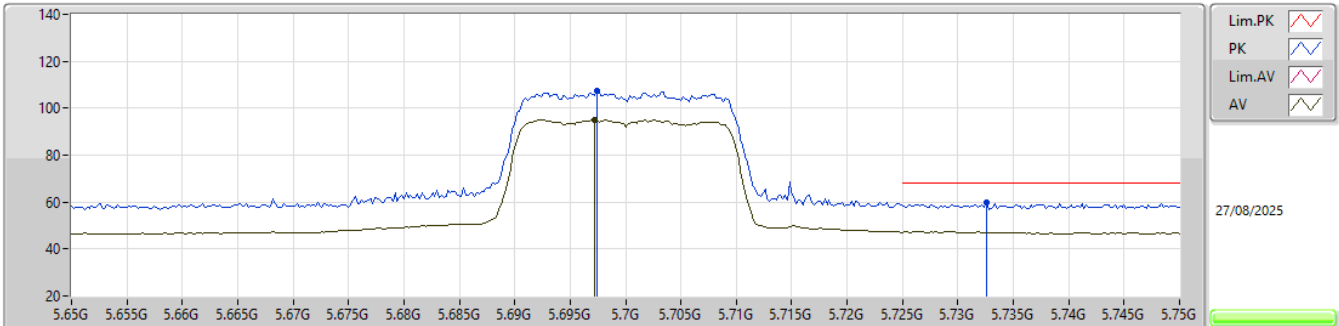


EUT_Z_1TX
 Setting 15
 06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6974G	107.60	Inf	-Inf	100.76	3	Horizontal	179	2.29	-	33.59	7.04	33.79			
AV	5.6972G	94.94	Inf	-Inf	88.10	3	Horizontal	179	2.29	-	33.59	7.04	33.79			
PK	5.7326G	59.64	68.20	-8.56	52.66	3	Horizontal	179	2.29	-	33.67	7.09	33.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5700MHz_TX

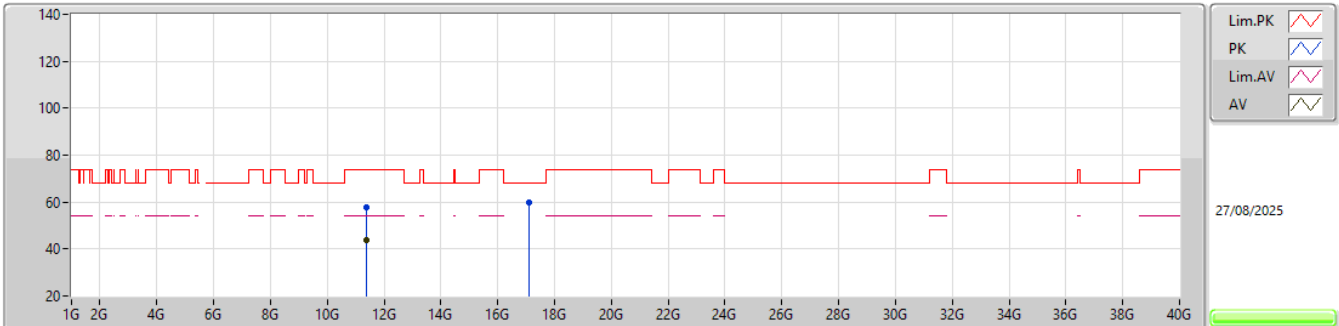EUT_Z_1TX
Setting 15
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39988G	57.56	74.00	-16.44	72.27	3	Vertical	259	2.20	-	39.80	11.69	66.20			
AV	11.40011G	43.78	54.00	-10.22	58.49	3	Vertical	259	2.20	-	39.80	11.69	66.20			
PK	17.0998G	59.82	68.20	-8.38	70.01	3	Vertical	186	2.48	-	40.30	13.79	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5700MHz_TX

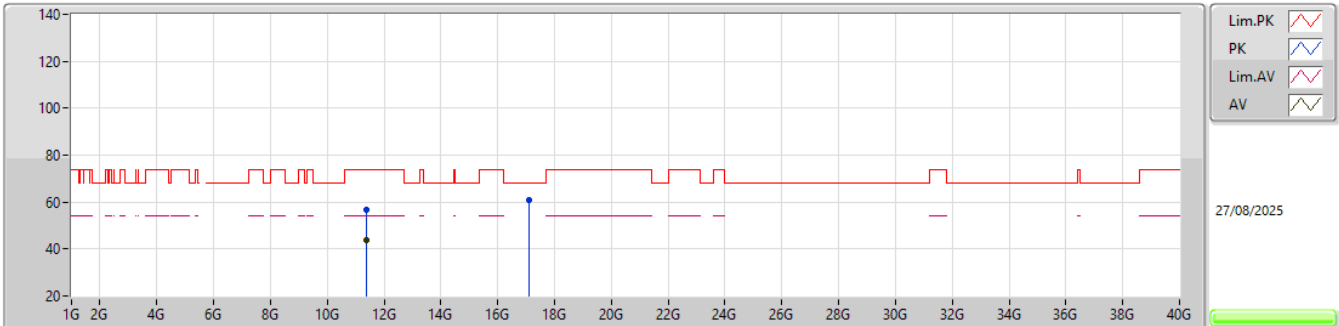EUT_Z_1TX
Setting 15
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40117G	56.52	74.00	-17.48	71.23	3	Horizontal	250	1.83	-	39.80	11.69	66.20			
AV	11.39998G	43.56	54.00	-10.44	58.27	3	Horizontal	250	1.83	-	39.80	11.69	66.20			
PK	17.09785G	60.83	68.20	-7.37	71.01	3	Horizontal	10	1.64	-	40.31	13.79	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

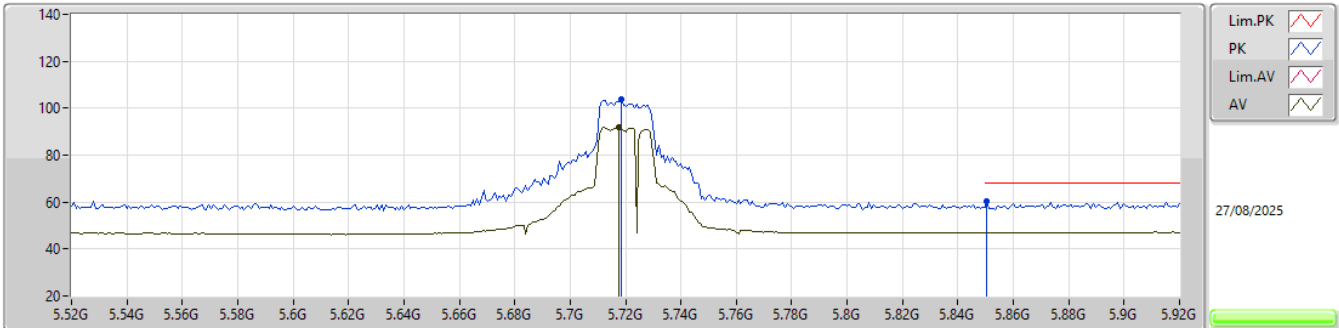


EUT_Z_1TX
Setting 24
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7184G	103.55	Inf	-Inf	96.62	3	Vertical	124	2.25	-	33.64	7.07	33.78				
AV	5.7176G	91.93	Inf	-Inf	85.00	3	Vertical	124	2.25	-	33.64	7.07	33.78				
PK	5.8504G	60.14	68.20	-8.06	52.79	3	Vertical	124	2.25	-	33.90	7.22	33.77				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

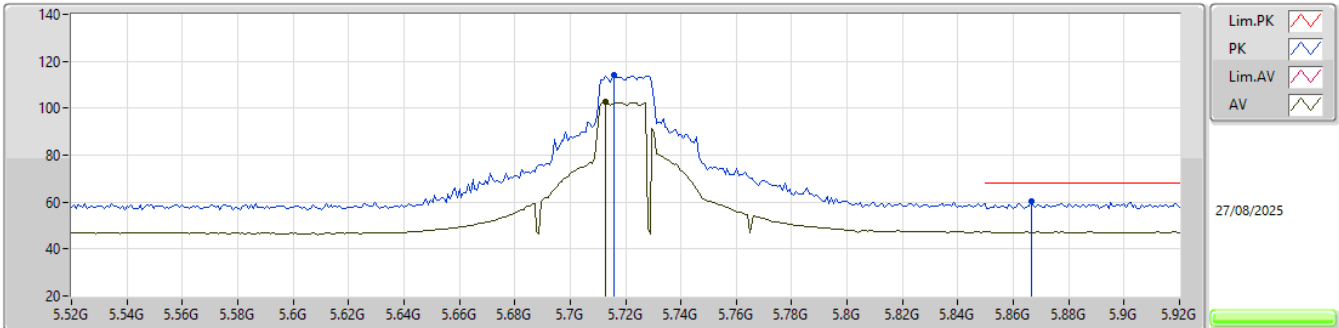


EUT_Z_1TX
Setting 24
06-E-5-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.716G	114.00	Inf	-Inf	107.08	3	Horizontal	197	2.96	-	33.63	7.07	33.78			
AV	5.7128G	102.54	Inf	-Inf	95.63	3	Horizontal	197	2.96	-	33.63	7.06	33.78			
PK	5.8664G	60.12	68.20	-8.08	52.69	3	Horizontal	197	2.96	-	33.97	7.23	33.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

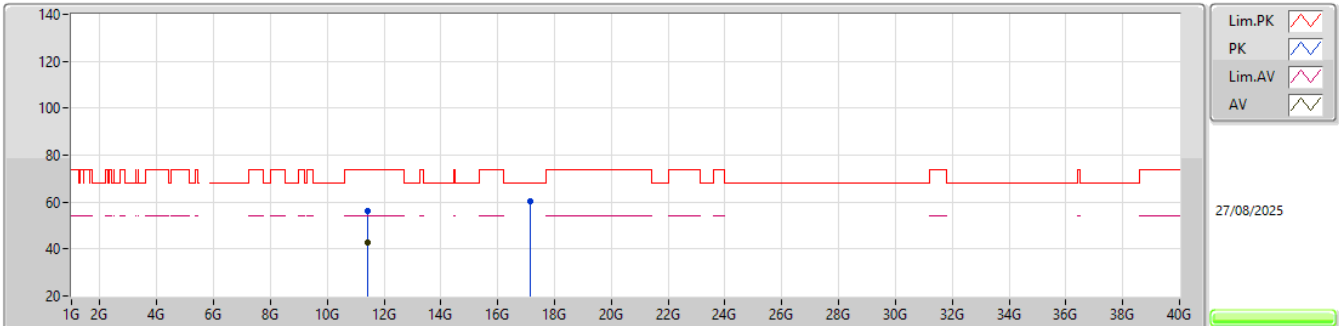


EUT_Z_1TX
Setting 24
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43971G	56.04	74.00	-17.96	70.72	3	Vertical	266	1.92	-	39.80	11.72	66.20			
AV	11.44232G	42.66	54.00	-11.34	57.34	3	Vertical	266	1.92	-	39.80	11.72	66.20			
PK	17.16213G	60.20	68.20	-8.00	70.21	3	Vertical	13	2.35	-	40.45	13.82	64.28			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

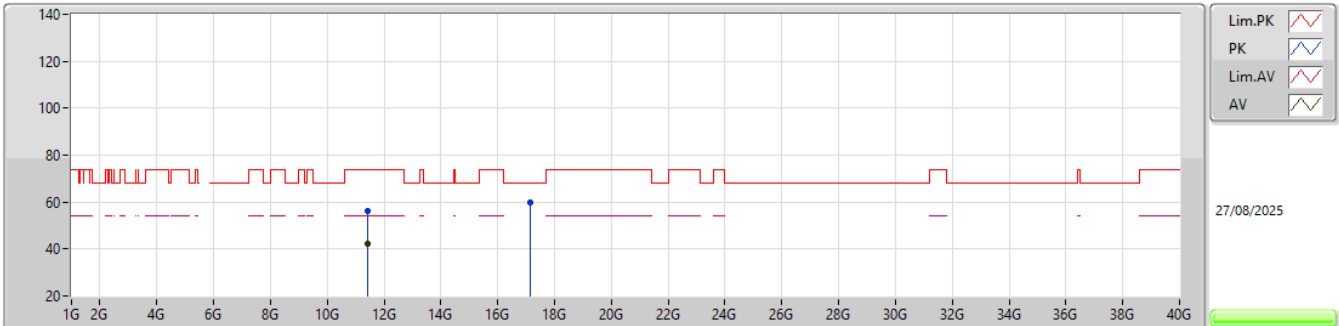EUT_Z_1TX
Setting 24
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43932G	56.02	74.00	-17.98	70.70	3	Horizontal	171	1.73	-	39.80	11.72	66.20			
AV	11.4396G	42.49	54.00	-11.51	57.17	3	Horizontal	171	1.73	-	39.80	11.72	66.20			
PK	17.15773G	59.68	68.20	-8.52	69.72	3	Horizontal	107	2.47	-	40.43	13.81	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

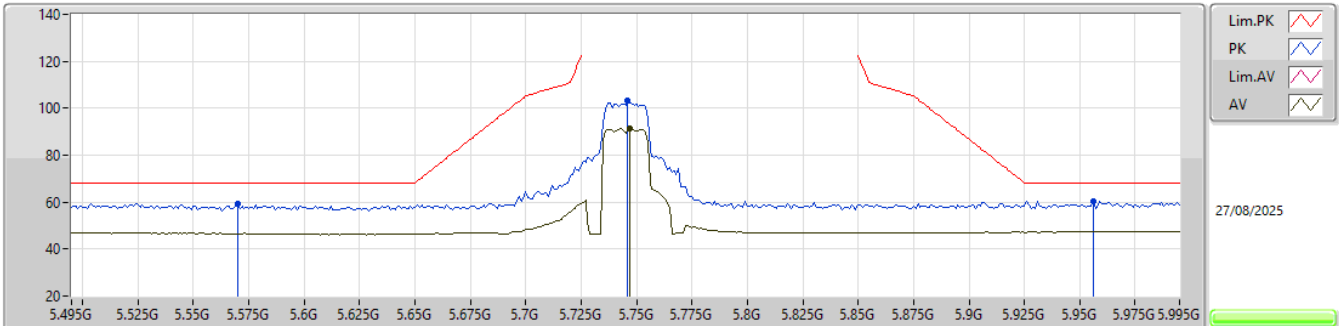


EUT_Z_1TX
Setting 22.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.57G	59.40	68.20	-8.80	52.57	3	Vertical	114	2.48	-	33.72	6.91	33.80			
PK	5.746G	103.06	Inf	-Inf	96.04	3	Vertical	114	2.48	-	33.69	7.11	33.78			
AV	5.747G	91.59	Inf	-Inf	84.57	3	Vertical	114	2.48	-	33.69	7.11	33.78			
PK	5.956G	60.56	68.20	-7.64	52.63	3	Vertical	114	2.48	-	34.40	7.29	33.76			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

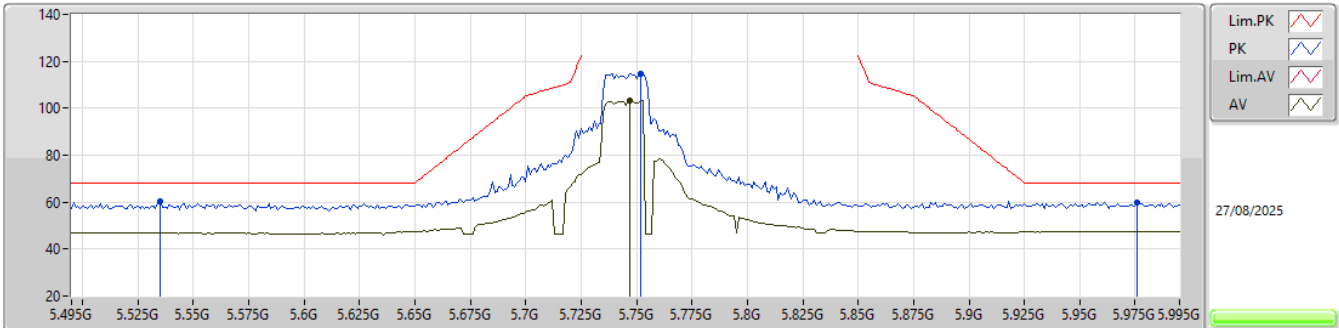


EUT_Z_1TX
Setting 22.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.535G	60.39	68.20	-7.81	53.50	3	Horizontal	206	2.56	-	33.80	6.90	33.81			
PK	5.752G	114.87	Inf	-Inf	107.83	3	Horizontal	206	2.56	-	33.70	7.12	33.78			
AV	5.747G	103.31	Inf	-Inf	96.29	3	Horizontal	206	2.56	-	33.69	7.11	33.78			
PK	5.976G	60.07	68.20	-8.13	52.12	3	Horizontal	206	2.56	-	34.40	7.30	33.75			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

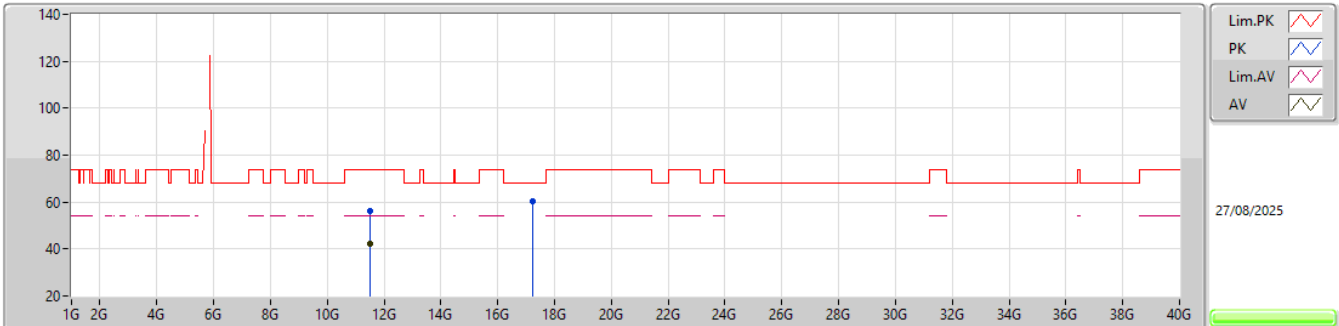


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48936G	56.12	74.00	-17.88	70.77	3	Vertical	112	1.35	-	39.80	11.75	66.20			
AV	11.4891G	42.37	54.00	-11.63	57.02	3	Vertical	112	1.35	-	39.80	11.75	66.20			
PK	17.23563G	60.58	68.20	-7.62	70.28	3	Vertical	27	2.25	-	40.74	13.84	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TX

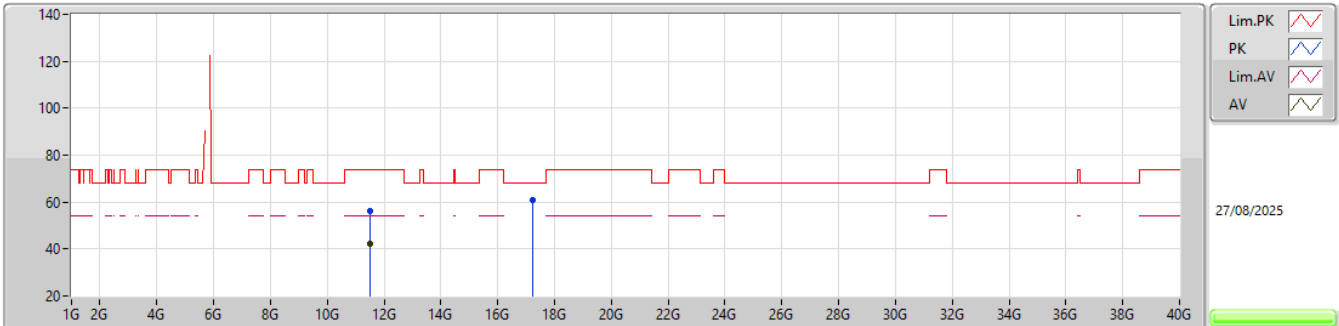


EUT_Z_1TX
Setting 22.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49159G	56.10	74.00	-17.90	70.75	3	Horizontal	10	1.39	-	39.80	11.75	66.20			
AV	11.48922G	42.30	54.00	-11.70	56.95	3	Horizontal	10	1.39	-	39.80	11.75	66.20			
PK	17.23449G	61.03	68.20	-7.17	70.73	3	Horizontal	184	2.92	-	40.74	13.84	64.28			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

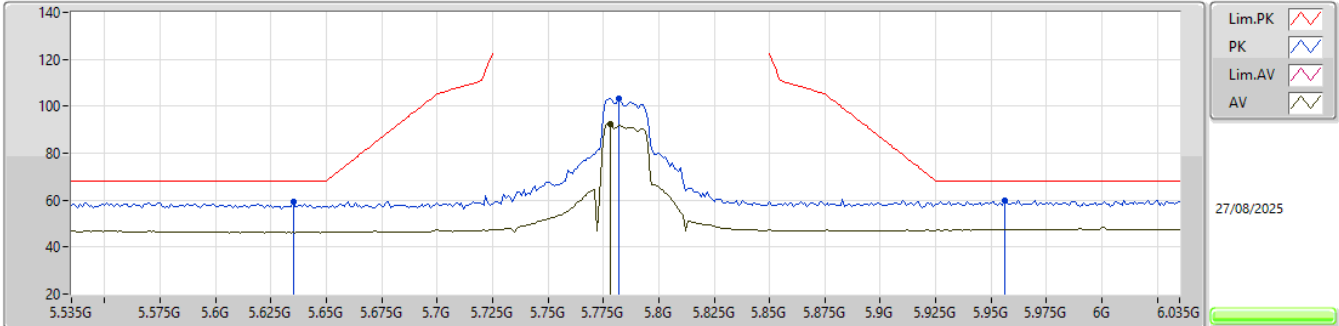


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.635G	59.18	68.20	-9.02	52.48	3	Vertical	115	1.82	-	33.53	6.96	33.79			
PK	5.782G	103.36	Inf	-Inf	96.22	3	Vertical	115	1.82	-	33.76	7.16	33.78			
AV	5.778G	92.20	Inf	-Inf	85.07	3	Vertical	115	1.82	-	33.76	7.15	33.78			
PK	5.956G	59.98	68.20	-8.22	52.05	3	Vertical	115	1.82	-	34.40	7.29	33.76			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

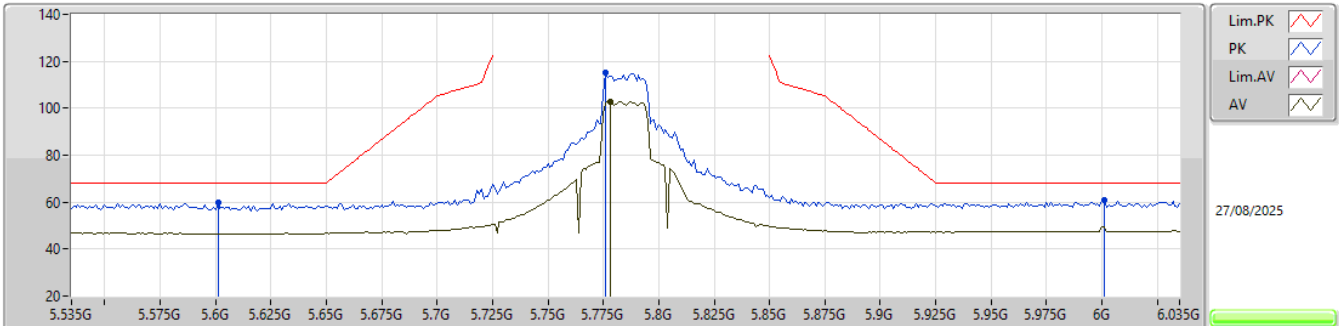


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.601G	59.74	68.20	-8.46	53.03	3	Horizontal	176	2.32	-	33.60	6.91	33.80			
PK	5.776G	115.01	Inf	-Inf	107.89	3	Horizontal	176	2.32	-	33.75	7.15	33.78			
AV	5.778G	102.76	Inf	-Inf	95.63	3	Horizontal	176	2.32	-	33.76	7.15	33.78			
PK	6.001G	60.84	68.20	-7.36	52.87	3	Horizontal	176	2.32	-	34.40	7.32	33.75			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TX

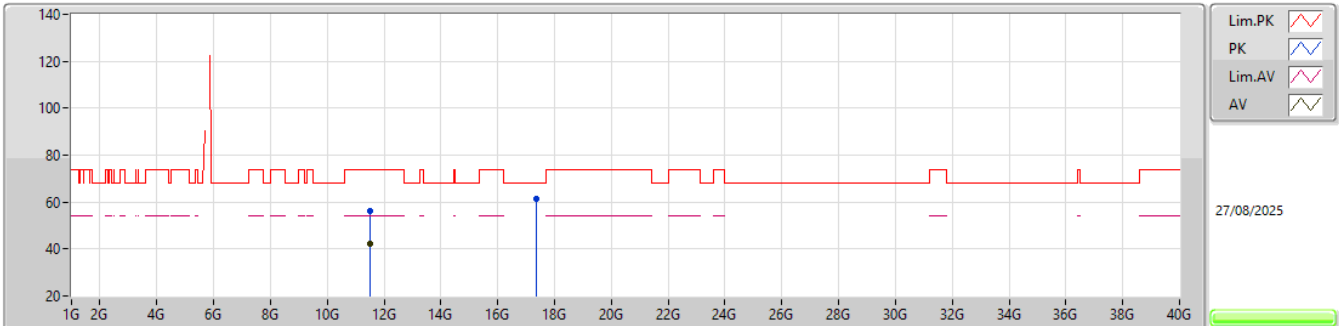


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49077G	56.15	74.00	-17.85	70.80	3	Vertical	257	1.66	-	39.80	11.75	66.20			
AV	11.49001G	42.21	54.00	-11.79	56.86	3	Vertical	257	1.66	-	39.80	11.75	66.20			
PK	17.35393G	61.19	68.20	-7.01	70.15	3	Vertical	354	1.81	-	41.43	13.88	64.27			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5785MHz_TX

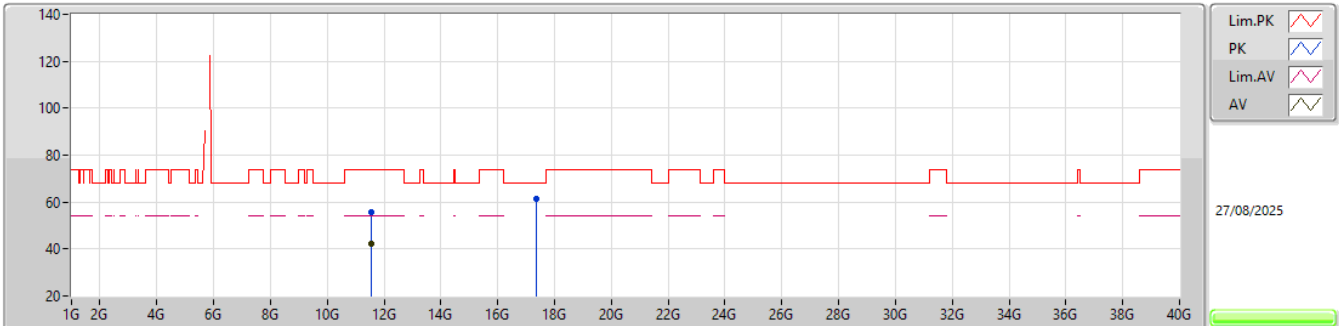EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57062G	55.64	74.00	-18.36	70.36	3	Horizontal	106	1.22	-	39.62	11.80	66.14			
AV	11.56842G	42.30	54.00	-11.70	57.01	3	Horizontal	106	1.22	-	39.63	11.80	66.14			
PK	17.35259G	61.36	68.20	-6.84	70.33	3	Horizontal	219	1.46	-	41.42	13.88	64.27			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

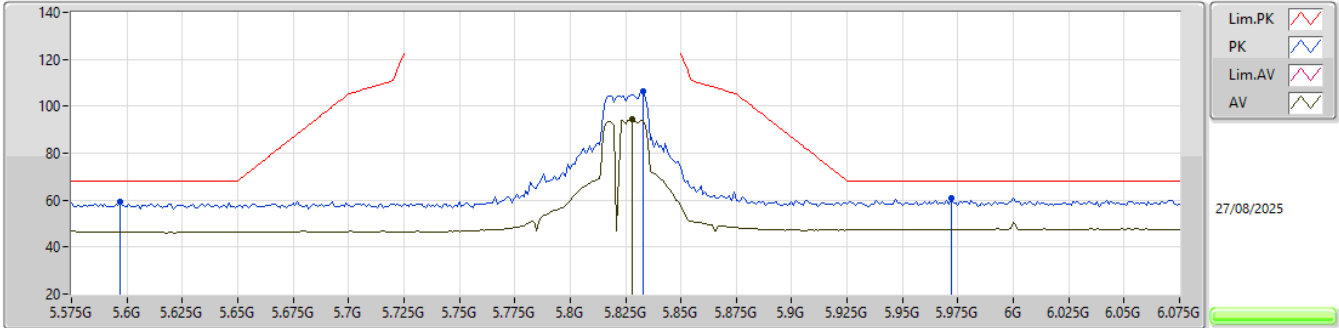


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.597G	59.10	68.20	-9.10	52.38	3	Vertical	110	1.00	-	33.61	6.91	33.80			
PK	5.833G	106.40	Inf	-Inf	99.10	3	Vertical	110	1.00	-	33.87	7.20	33.77			
AV	5.828G	94.37	Inf	-Inf	87.08	3	Vertical	110	1.00	-	33.86	7.20	33.77			
PK	5.972G	61.01	68.20	-7.19	53.06	3	Vertical	110	1.00	-	34.40	7.30	33.75			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

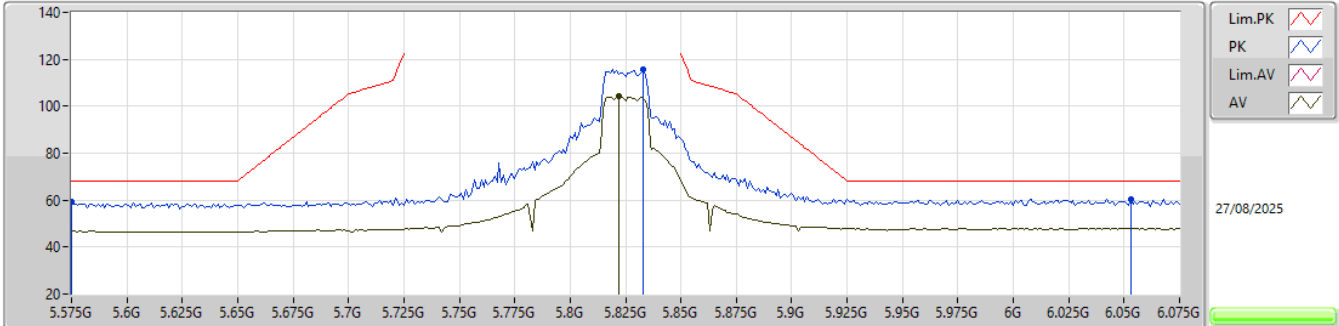


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.575G	59.19	68.20	-9.01	52.38	3	Horizontal	202	2.57	-	33.70	6.91	33.80			
PK	5.833G	115.71	Inf	-Inf	108.41	3	Horizontal	202	2.57	-	33.87	7.20	33.77			
AV	5.822G	104.56	Inf	-Inf	97.29	3	Horizontal	202	2.57	-	33.84	7.20	33.77			
PK	6.053G	60.47	68.20	-7.73	52.34	3	Horizontal	202	2.57	-	34.50	7.35	33.72			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5825MHz_TX

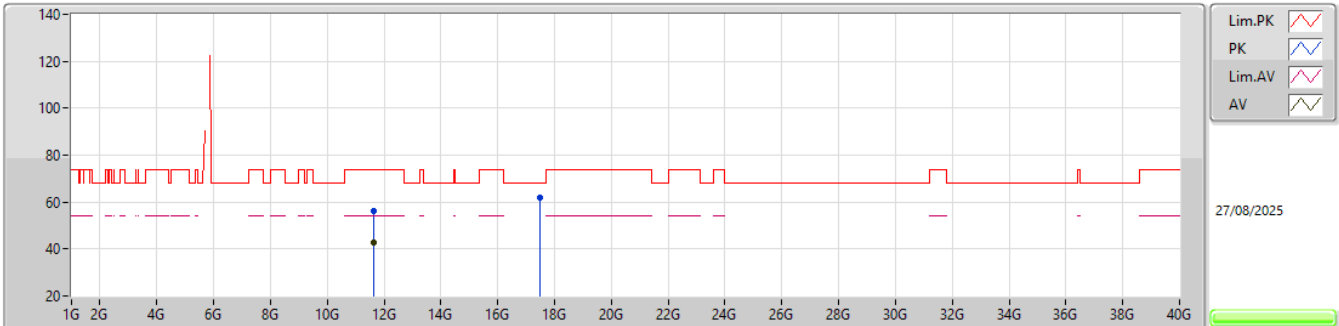
EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64837G	56.35	74.00	-17.65	71.36	3	Vertical	297	1.52	-	39.21	11.85	66.07			
AV	11.65204G	42.58	54.00	-11.42	57.59	3	Vertical	297	1.52	-	39.20	11.85	66.06			
PK	17.47632G	61.78	68.20	-6.42	69.86	3	Vertical	348	1.42	-	42.26	13.92	64.26			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TX

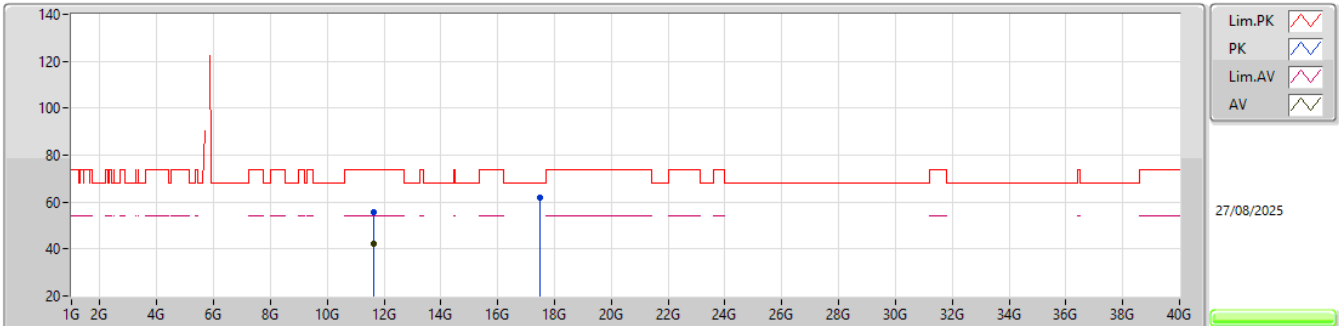


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64829G	55.84	74.00	-18.16	70.85	3	Horizontal	164	2.75	-	39.21	11.85	66.07			
AV	11.65247G	42.27	54.00	-11.73	57.28	3	Horizontal	164	2.75	-	39.20	11.85	66.06			
PK	17.47338G	61.70	68.20	-6.50	69.80	3	Horizontal	293	2.22	-	42.24	13.92	64.26			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

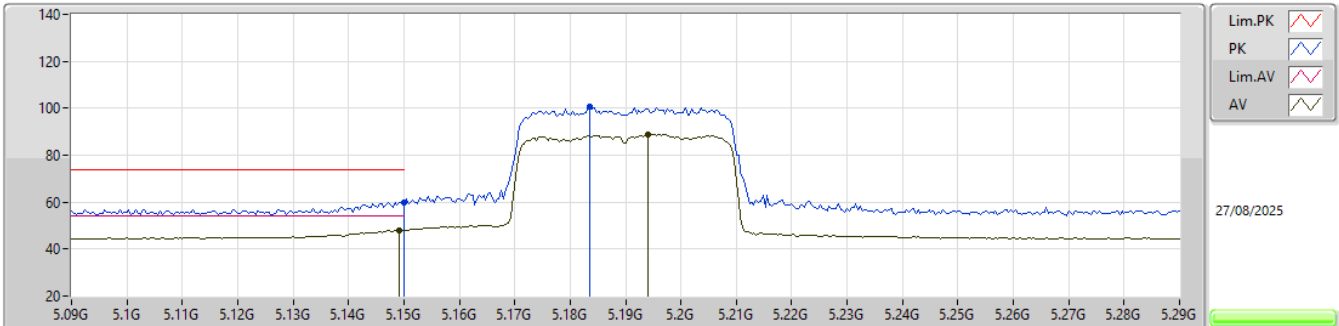


EUT_Z_1TX
Setting 14
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	59.99	74.00	-14.01	55.03	3	Vertical	100	2.74	-	31.90	6.78	33.72			
AV	5.1492G	48.18	54.00	-5.82	43.22	3	Vertical	100	2.74	-	31.90	6.78	33.72			
PK	5.1836G	100.76	Inf	-Inf	95.96	3	Vertical	100	2.74	-	31.70	6.83	33.73			
AV	5.194G	88.74	Inf	-Inf	83.99	3	Vertical	100	2.74	-	31.64	6.84	33.73			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

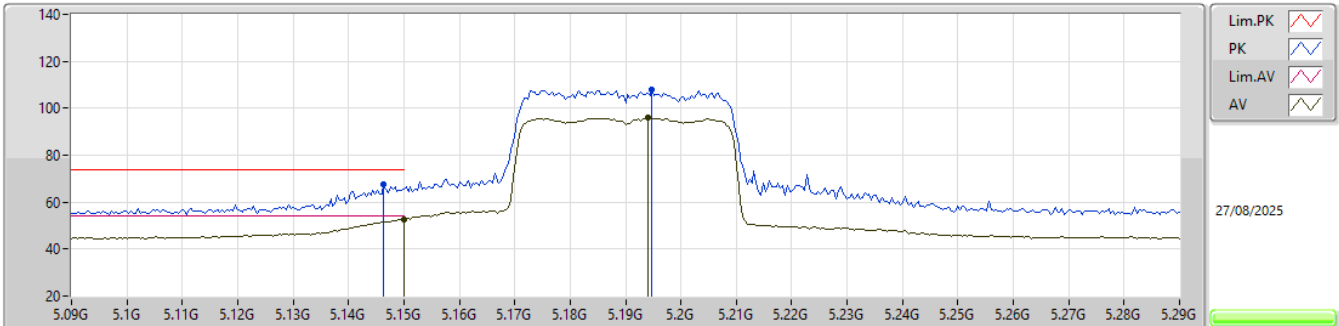


EUT_Z_1TX
Setting 14
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1464G	67.76	74.00	-6.24	62.82	3	Horizontal	185	2.75	-	31.89	6.77	33.72			
AV	5.15G	52.75	54.00	-1.25	47.79	3	Horizontal	185	2.75	-	31.90	6.78	33.72			
PK	5.1948G	107.90	Inf	-Inf	103.16	3	Horizontal	185	2.75	-	31.63	6.84	33.73			
AV	5.194G	95.80	Inf	-Inf	91.05	3	Horizontal	185	2.75	-	31.64	6.84	33.73			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TX

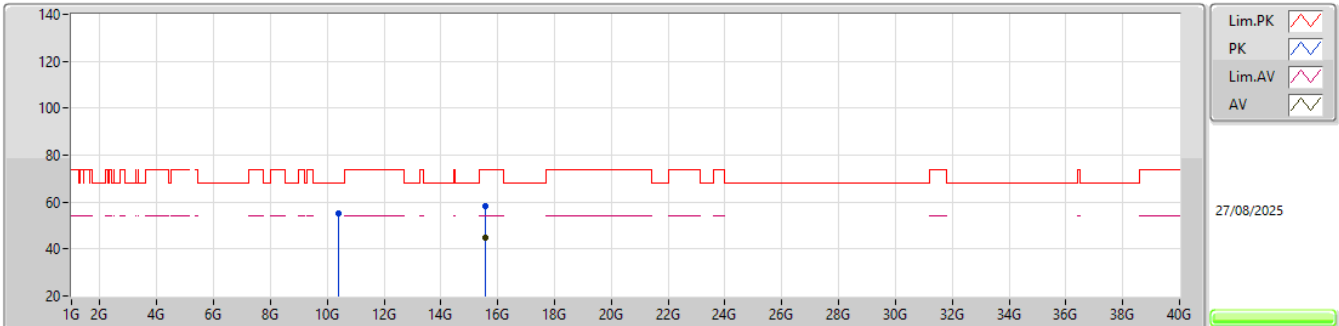


EUT_Z_1TX
Setting 14
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37904G	55.42	68.20	-12.78	71.35	3	Vertical	178	1.40	-	39.72	11.03	66.68			
PK	15.57106G	58.45	74.00	-15.55	70.45	3	Vertical	23	2.37	-	38.72	13.12	63.84			
AV	15.57166G	45.02	54.00	-8.98	57.03	3	Vertical	23	2.37	-	38.71	13.12	63.84			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5190MHz_TX

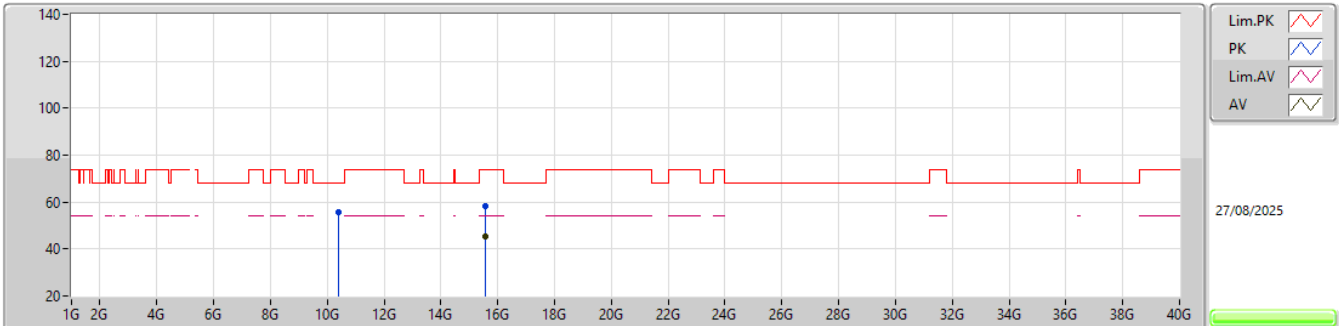EUT_Z_1TX
Setting 14
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37933G	55.77	68.20	-12.43	71.70	3	Horizontal	219	2.71	-	39.72	11.03	66.68			
PK	15.56805G	58.45	74.00	-15.55	70.44	3	Horizontal	268	2.19	-	38.73	13.12	63.84			
AV	15.56805G	45.16	54.00	-8.84	57.15	3	Horizontal	268	2.19	-	38.73	13.12	63.84			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5230MHz_TX

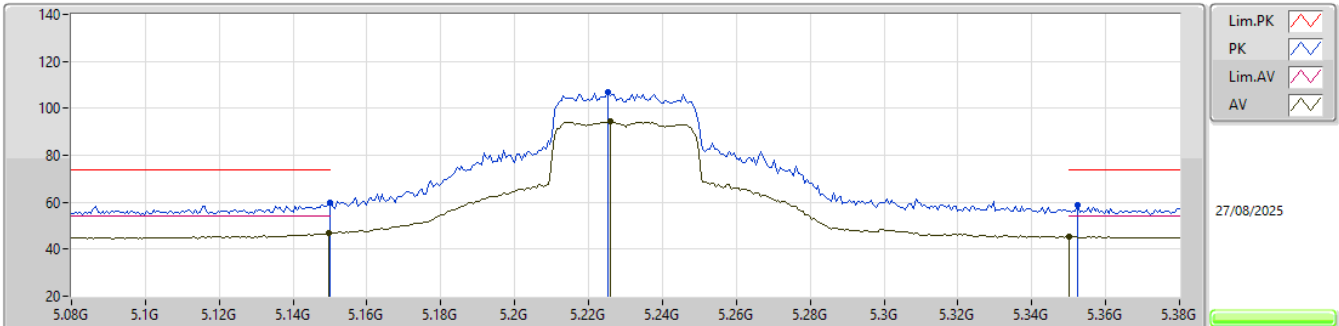EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	59.81	74.00	-14.19	54.85	3	Vertical	105	2.70	-	31.90	6.78	33.72			
AV	5.1496G	46.81	54.00	-7.19	41.85	3	Vertical	105	2.70	-	31.90	6.78	33.72			
PK	5.2252G	106.75	Inf	-Inf	102.19	3	Vertical	105	2.70	-	31.45	6.85	33.74			
AV	5.2258G	94.34	Inf	-Inf	89.78	3	Vertical	105	2.70	-	31.45	6.85	33.74			
PK	5.3524G	58.85	74.00	-15.15	54.45	3	Vertical	105	2.70	-	31.30	6.87	33.77			
AV	5.35G	45.33	54.00	-8.67	40.93	3	Vertical	105	2.70	-	31.30	6.87	33.77			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

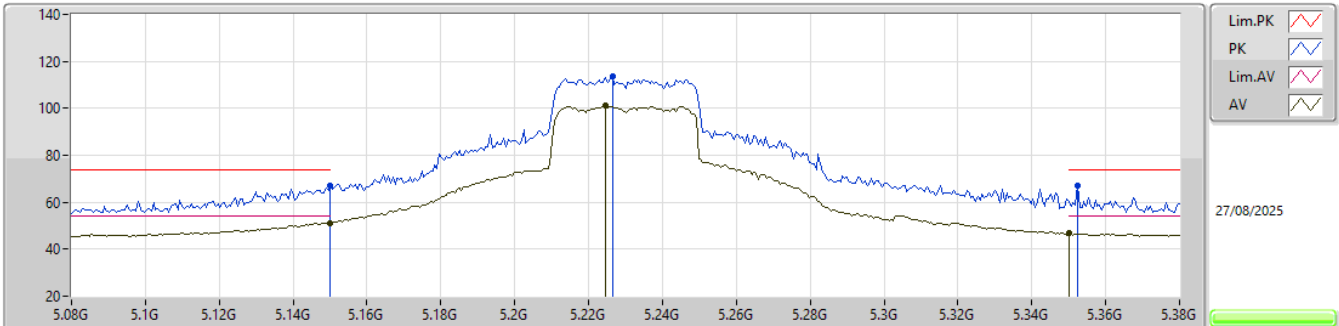


EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	66.89	74.00	-7.11	61.93	3	Horizontal	184	2.86	-	31.90	6.78	33.72			
AV	5.15G	51.16	54.00	-2.84	46.20	3	Horizontal	184	2.86	-	31.90	6.78	33.72			
PK	5.2264G	113.51	Inf	-Inf	108.96	3	Horizontal	184	2.86	-	31.44	6.85	33.74			
AV	5.2246G	101.02	Inf	-Inf	96.46	3	Horizontal	184	2.86	-	31.45	6.85	33.74			
PK	5.3524G	67.03	74.00	-6.97	62.63	3	Horizontal	184	2.86	-	31.30	6.87	33.77			
AV	5.35G	46.75	54.00	-7.25	42.35	3	Horizontal	184	2.86	-	31.30	6.87	33.77			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TX

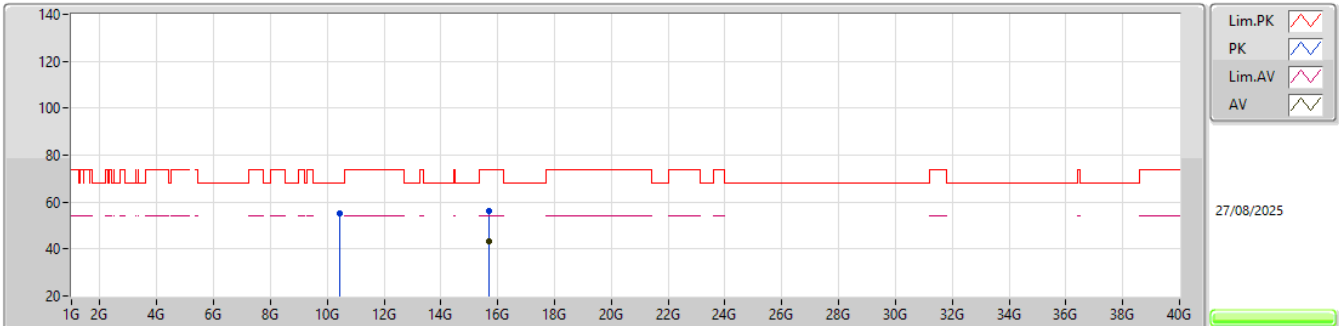


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.4613G	55.43	68.20	-12.77	71.16	3	Vertical	301	2.89	-	39.90	11.08	66.71				
PK	15.69007G	56.26	74.00	-17.74	68.48	3	Vertical	300	2.47	-	38.46	13.20	63.88				
AV	15.69037G	43.13	54.00	-10.87	55.35	3	Vertical	300	2.47	-	38.46	13.20	63.88				

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5230MHz_TX

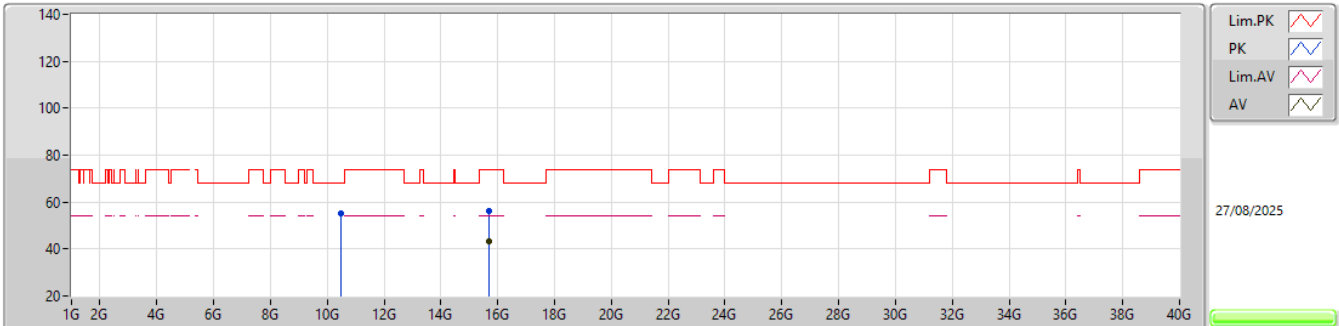EUT_Z_1TX
Setting 20.5
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.46209G	55.23	68.20	-12.97	70.96	3	Horizontal	12	2.77	-	39.90	11.08	66.71			
PK	15.68779G	56.29	74.00	-17.71	68.52	3	Horizontal	179	2.69	-	38.45	13.20	63.88			
AV	15.68824G	43.21	54.00	-10.79	55.44	3	Horizontal	179	2.69	-	38.45	13.20	63.88			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TX

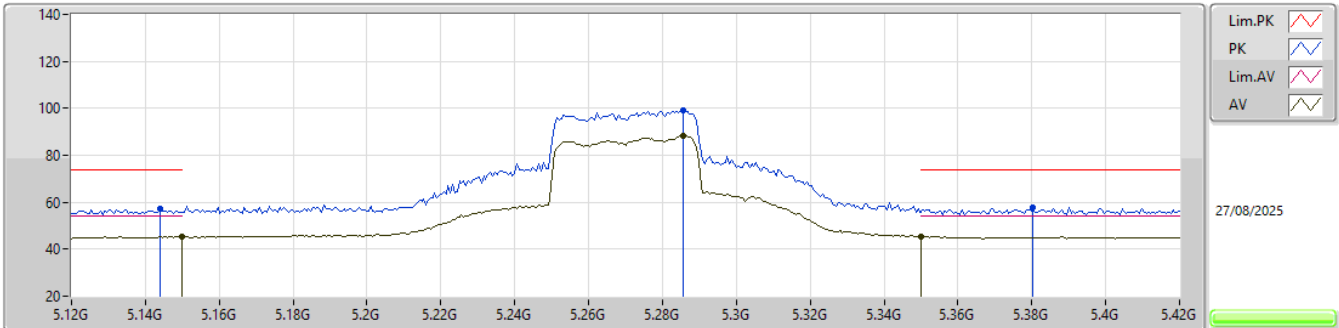


EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.144G	57.12	74.00	-16.88	52.19	3	Vertical	296	1.55	-	31.88	6.77	33.72			
AV	5.15G	45.36	54.00	-8.64	40.40	3	Vertical	296	1.55	-	31.90	6.78	33.72			
PK	5.2856G	99.03	Inf	-Inf	94.69	3	Vertical	296	1.55	-	31.23	6.86	33.75			
AV	5.2856G	88.52	Inf	-Inf	84.18	3	Vertical	296	1.55	-	31.23	6.86	33.75			
PK	5.3804G	57.74	74.00	-16.26	53.28	3	Vertical	296	1.55	-	31.36	6.88	33.78			
AV	5.35G	45.41	54.00	-8.59	41.01	3	Vertical	296	1.55	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TX

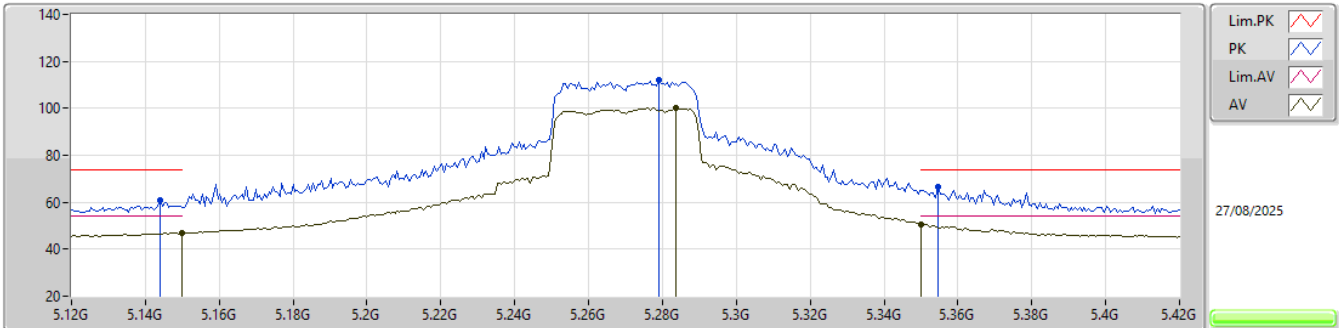


EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.144G	60.79	74.00	-13.21	55.86	3	Horizontal	184	2.78	-	31.88	6.77	33.72			
AV	5.15G	46.80	54.00	-7.20	41.84	3	Horizontal	184	2.78	-	31.90	6.78	33.72			
PK	5.279G	112.16	Inf	-Inf	107.81	3	Horizontal	184	2.78	-	31.24	6.86	33.75			
AV	5.2838G	100.04	Inf	-Inf	95.70	3	Horizontal	184	2.78	-	31.23	6.86	33.75			
PK	5.3546G	66.30	74.00	-7.70	61.89	3	Horizontal	184	2.78	-	31.31	6.87	33.77			
AV	5.35G	50.73	54.00	-3.27	46.33	3	Horizontal	184	2.78	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TX

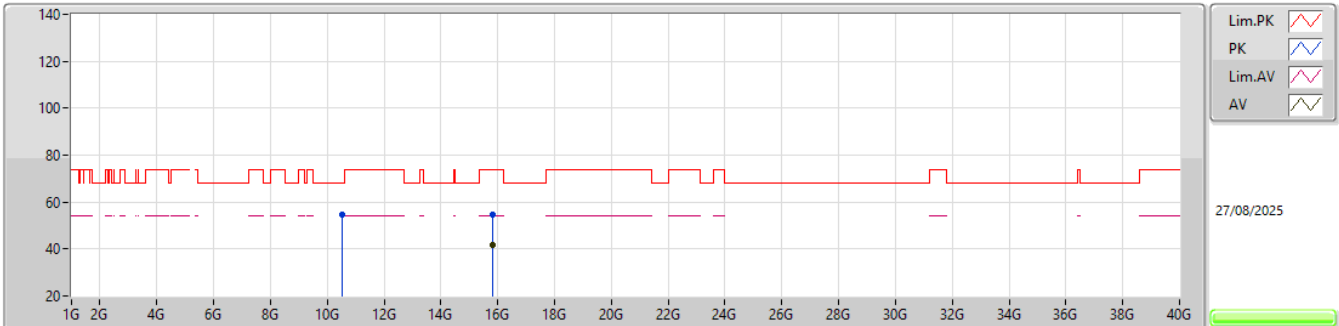


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54002G	54.90	68.20	-13.30	70.64	3	Vertical	356	1.23	-	39.82	11.13	66.69			
PK	15.81125G	54.60	74.00	-19.40	67.08	3	Vertical	204	2.15	-	38.16	13.29	63.93			
AV	15.80787G	41.54	54.00	-12.46	54.01	3	Vertical	204	2.15	-	38.17	13.29	63.93			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5270MHz_TX

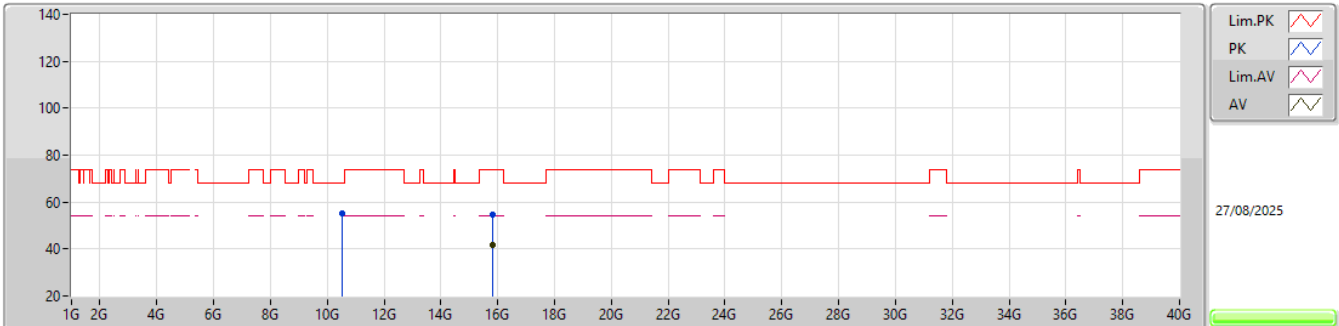EUT_Z_1TX
Setting 20.5
06-E-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53754G	55.14	68.20	-13.06	70.88	3	Horizontal	354	1.96	-	39.82	11.13	66.69			
PK	15.80945G	54.79	74.00	-19.21	67.27	3	Horizontal	11	1.47	-	38.16	13.29	63.93			
AV	15.80824G	41.58	54.00	-12.42	54.05	3	Horizontal	11	1.47	-	38.17	13.29	63.93			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_1TX

5310MHz_TX

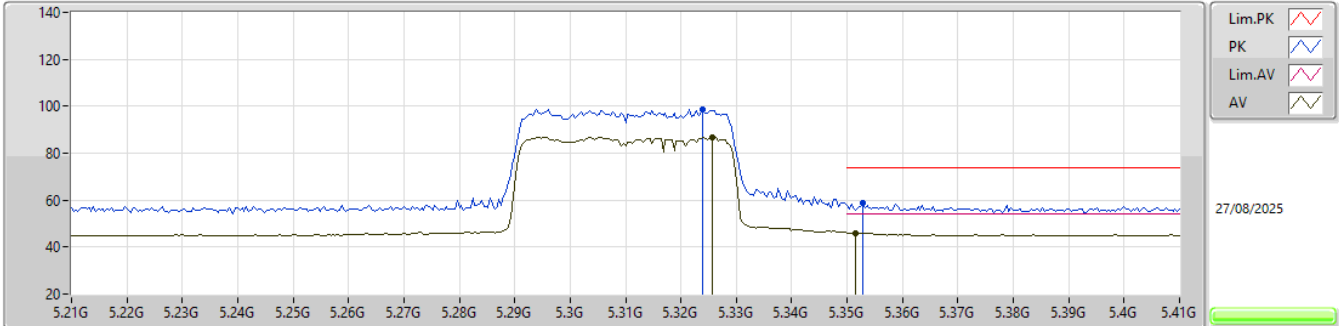


EUT_Z_1TX
Setting 14
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.324G	98.75	Inf	-Inf	94.39	3	Vertical	308	1.01	-	31.25	6.87	33.76				
AV	5.3256G	86.97	Inf	-Inf	82.61	3	Vertical	308	1.01	-	31.25	6.87	33.76				
PK	5.3528G	58.72	74.00	-15.28	54.31	3	Vertical	308	1.01	-	31.31	6.87	33.77				
AV	5.3516G	46.12	54.00	-7.88	41.72	3	Vertical	308	1.01	-	31.30	6.87	33.77				

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TX

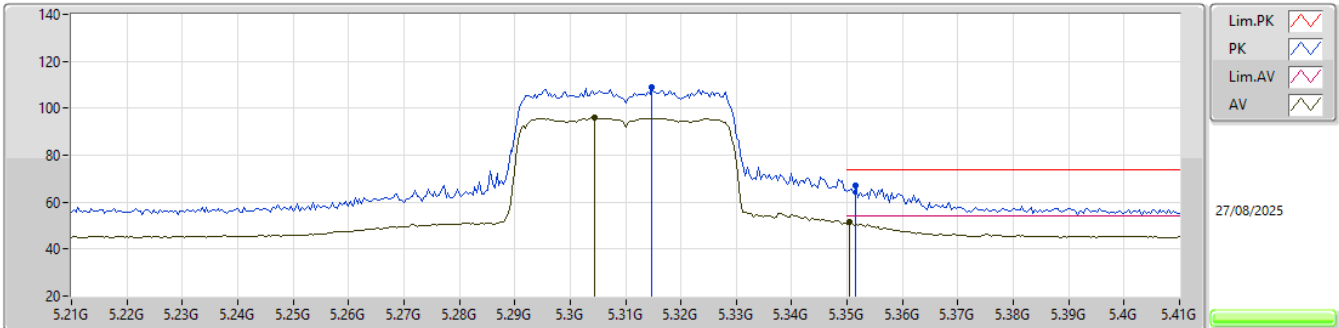


EUT_Z_1TX
Setting 14
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3148G	109.03	Inf	-Inf	104.69	3	Horizontal	187	2.93	-	31.23	6.87	33.76			
AV	5.3044G	95.87	Inf	-Inf	91.55	3	Horizontal	187	2.93	-	31.21	6.87	33.76			
PK	5.3516G	67.10	74.00	-6.90	62.70	3	Horizontal	187	2.93	-	31.30	6.87	33.77			
AV	5.3504G	51.33	54.00	-2.67	46.93	3	Horizontal	187	2.93	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5310MHz_TX

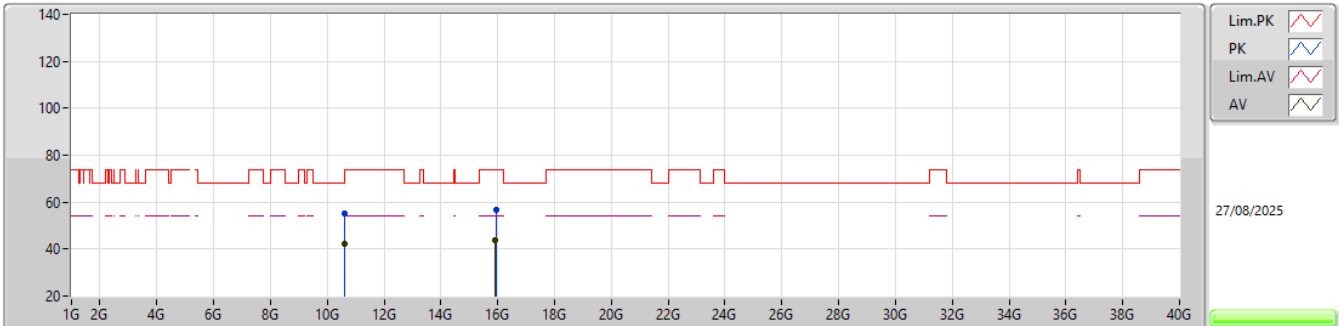EUT_Z_1TX
Setting 14
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62108G	55.30	74.00	-18.70	70.82	3	Vertical	105	2.43	-	39.90	11.18	66.60			
AV	10.6185G	42.27	54.00	-11.73	57.79	3	Vertical	105	2.43	-	39.90	11.18	66.60			
PK	15.93007G	56.83	74.00	-17.17	69.45	3	Vertical	80	1.79	-	37.98	13.37	63.97			
AV	15.92863G	43.73	54.00	-10.27	56.34	3	Vertical	80	1.79	-	37.99	13.37	63.97			

5.25-5.35GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5310MHz_TX

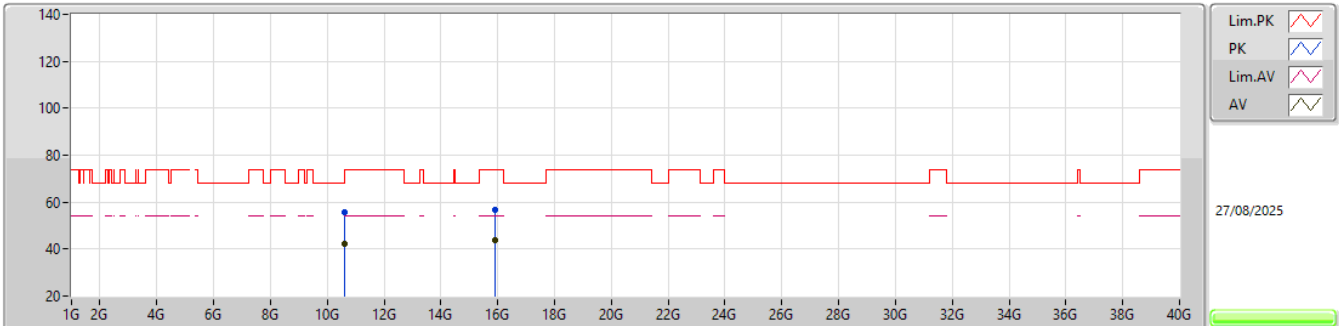EUT_Z_1TX
Setting 14
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62092G	55.83	74.00	-18.17	71.35	3	Horizontal	120	1.80	-	39.90	11.18	66.60			
AV	10.62087G	42.18	54.00	-11.82	57.70	3	Horizontal	120	1.80	-	39.90	11.18	66.60			
PK	15.9279G	56.89	74.00	-17.11	69.50	3	Horizontal	345	2.56	-	37.99	13.37	63.97			
AV	15.92786G	43.94	54.00	-10.06	56.55	3	Horizontal	345	2.56	-	37.99	13.37	63.97			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

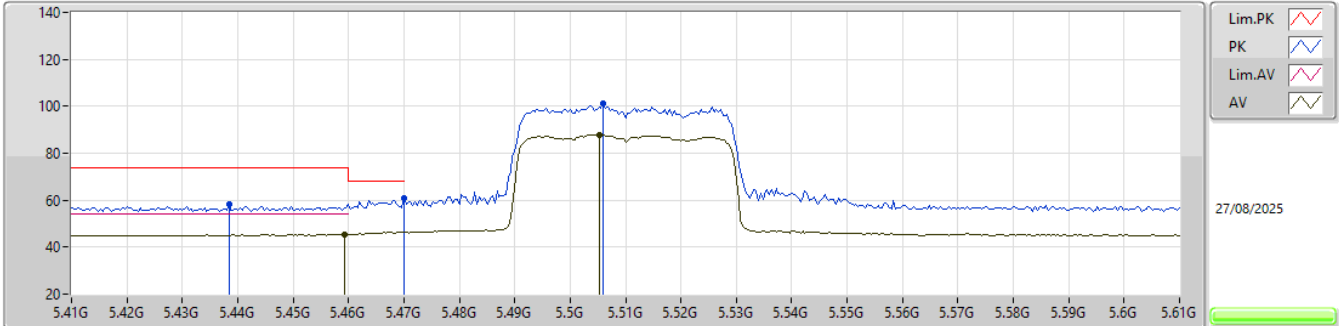


EUT_Z_1TX
Setting 13.5
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4384G	58.17	74.00	-15.83	53.59	3	Vertical	110	2.73	-	31.48	6.89	33.79			
PK	5.47G	60.90	68.20	-7.30	56.23	3	Vertical	110	2.73	-	31.58	6.89	33.80			
AV	5.4592G	45.44	54.00	-8.56	40.81	3	Vertical	110	2.73	-	31.54	6.89	33.80			
PK	5.506G	101.34	Inf	-Inf	96.55	3	Vertical	110	2.73	-	31.70	6.90	33.81			
AV	5.5052G	87.99	Inf	-Inf	83.20	3	Vertical	110	2.73	-	31.70	6.90	33.81			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

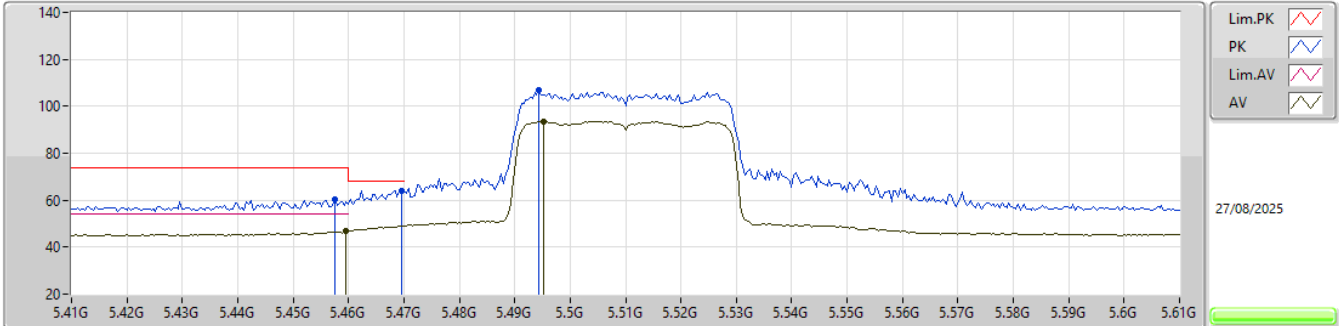


EUT_Z_1TX
Setting 13.5
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4576G	60.47	74.00	-13.53	55.85	3	Horizontal	184	2.74	-	31.53	6.89	33.80			
AV	5.4596G	46.76	54.00	-7.24	42.13	3	Horizontal	184	2.74	-	31.54	6.89	33.80			
PK	5.4696G	64.06	68.20	-4.14	59.39	3	Horizontal	184	2.74	-	31.58	6.89	33.80			
PK	5.4944G	106.77	Inf	-Inf	102.01	3	Horizontal	184	2.74	-	31.68	6.89	33.81			
AV	5.4952G	93.64	Inf	-Inf	88.88	3	Horizontal	184	2.74	-	31.68	6.89	33.81			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

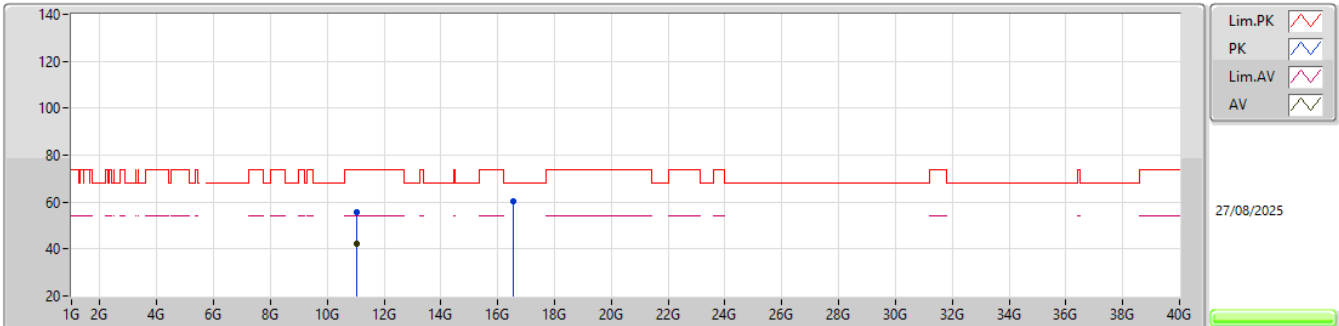


EUT_Z_1TX
Setting 13.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01905G	55.85	74.00	-18.15	70.48	3	Vertical	188	1.76	-	40.12	11.44	66.19			
AV	11.01874G	42.25	54.00	-11.75	56.87	3	Vertical	188	1.76	-	40.13	11.44	66.19			
PK	16.52872G	60.22	68.20	-7.98	70.56	3	Vertical	353	2.09	-	39.83	13.60	63.77			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TX

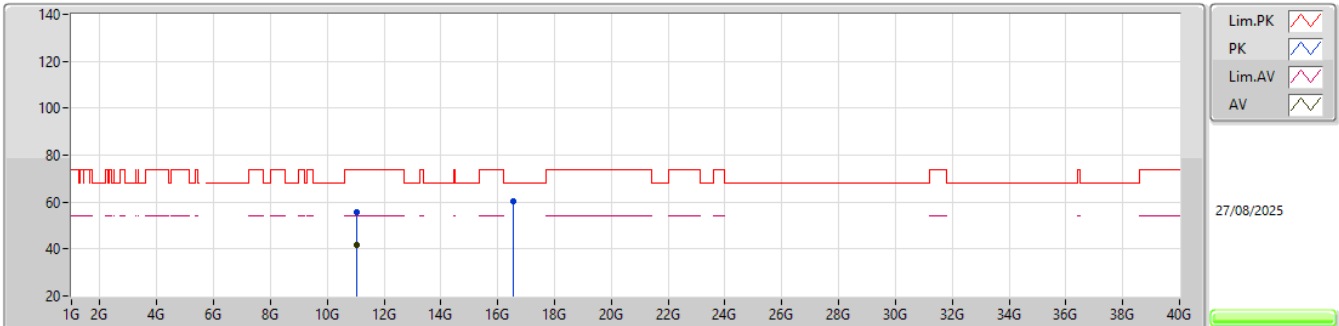


EUT_Z_1TX
Setting 13.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01902G	55.56	74.00	-18.44	70.19	3	Horizontal	164	2.51	-	40.12	11.44	66.19			
AV	11.01834G	41.96	54.00	-12.04	56.58	3	Horizontal	164	2.51	-	40.13	11.44	66.19			
PK	16.53026G	60.39	68.20	-7.81	70.74	3	Horizontal	283	2.77	-	39.82	13.60	63.77			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

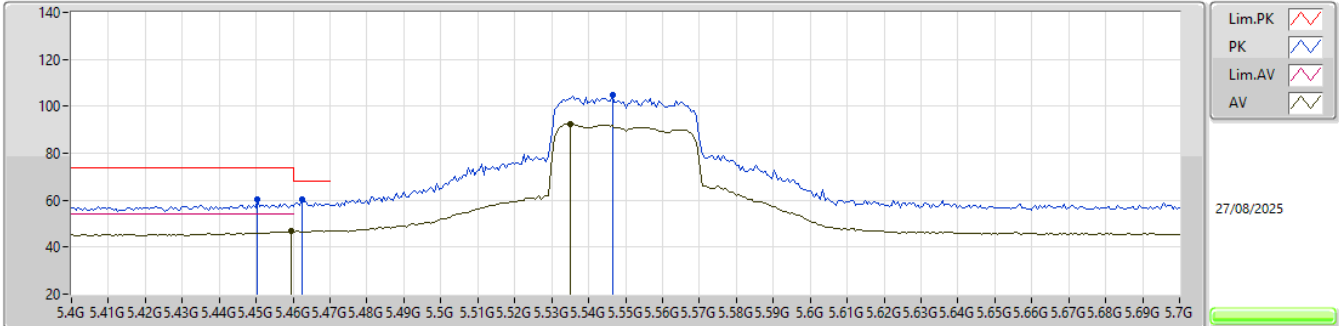


EUT_Z_1TX
Setting 18.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4504G	60.15	74.00	-13.85	55.56	3	Vertical	99	2.72	-	31.50	6.89	33.80			
PK	5.4624G	60.21	68.20	-7.99	55.57	3	Vertical	99	2.72	-	31.55	6.89	33.80			
AV	5.4594G	46.72	54.00	-7.28	42.09	3	Vertical	99	2.72	-	31.54	6.89	33.80			
PK	5.5464G	104.69	Inf	-Inf	99.89	3	Vertical	99	2.72	-	31.70	6.90	33.80			
AV	5.535G	92.33	Inf	-Inf	87.54	3	Vertical	99	2.72	-	31.70	6.90	33.81			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

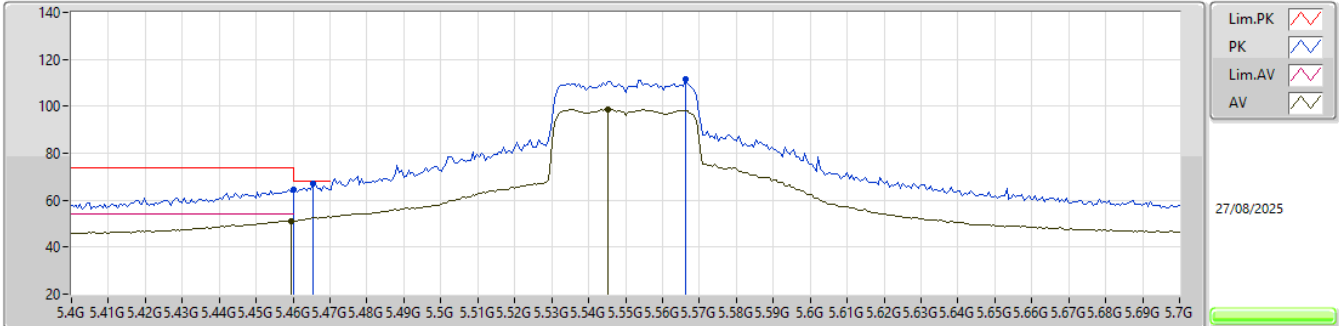


EUT_Z_1TX
Setting 18.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	64.56	74.00	-9.44	59.93	3	Horizontal	185	2.71	-	31.54	6.89	33.80			
AV	5.4594G	51.27	54.00	-2.73	46.64	3	Horizontal	185	2.71	-	31.54	6.89	33.80			
PK	5.4654G	66.92	68.20	-1.28	62.27	3	Horizontal	185	2.71	-	31.56	6.89	33.80			
PK	5.5662G	111.57	Inf	-Inf	106.80	3	Horizontal	185	2.71	-	31.67	6.90	33.80			
AV	5.5452G	98.73	Inf	-Inf	93.93	3	Horizontal	185	2.71	-	31.70	6.90	33.80			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5550MHz_TX

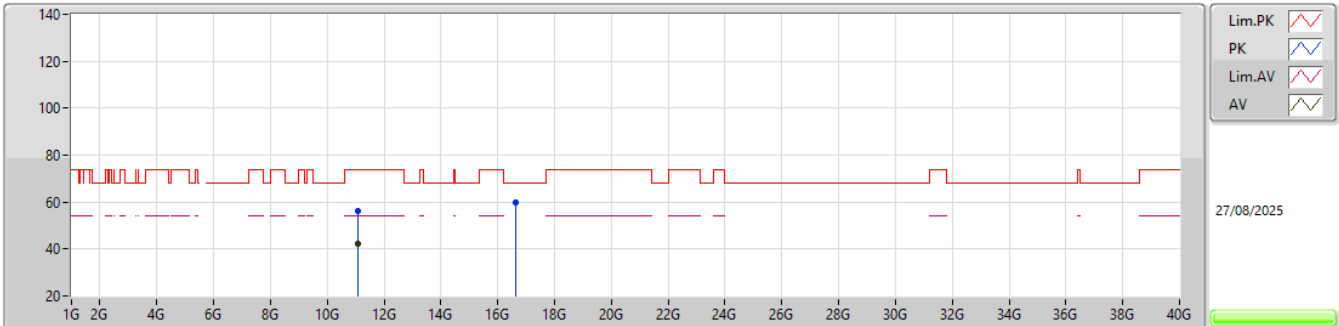EUT_Z_1TX
Setting 18.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10216G	56.23	74.00	-17.77	71.23	3	Vertical	8	1.70	-	39.69	11.50	66.19			
AV	11.10013G	42.44	54.00	-11.56	57.43	3	Vertical	8	1.70	-	39.70	11.50	66.19			
PK	16.65195G	60.01	68.20	-8.19	70.47	3	Vertical	334	2.20	-	39.81	13.64	63.91			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TX

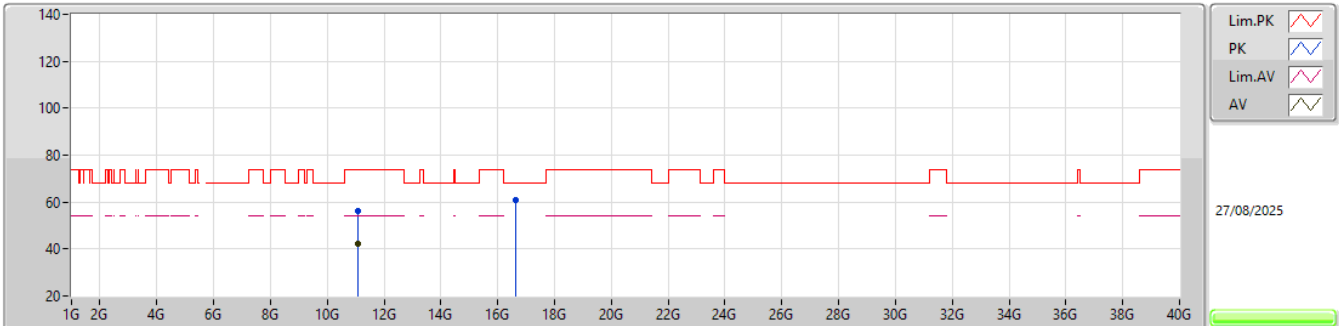


EUT_Z_1TX
Setting 18.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.09861G	56.11	74.00	-17.89	71.10	3	Horizontal	233	2.31	-	39.71	11.49	66.19			
AV	11.09994G	42.32	54.00	-11.68	57.32	3	Horizontal	233	2.31	-	39.70	11.49	66.19			
PK	16.64902G	60.74	68.20	-7.46	71.21	3	Horizontal	314	1.13	-	39.79	13.64	63.90			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TX

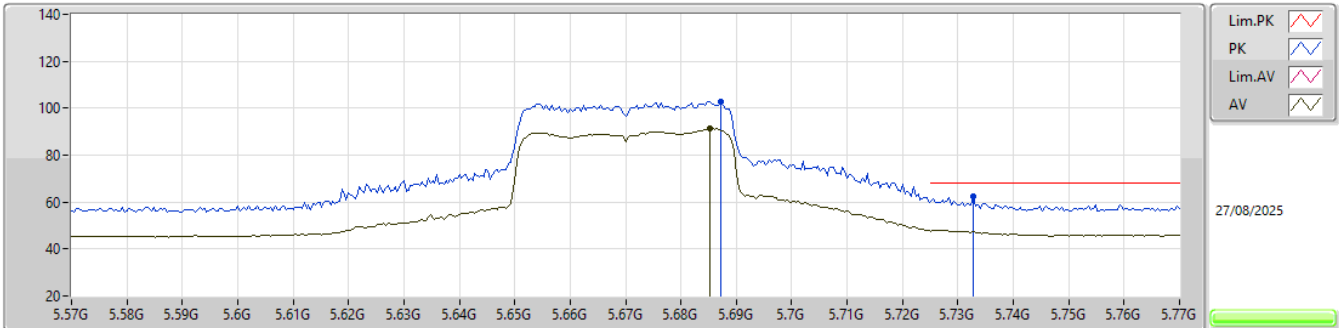


EUT_Z_1TX
Setting 19.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6872G	102.74	Inf	-Inf	97.58	3	Vertical	276	1.08	-	31.92	7.03	33.79			
AV	5.6852G	91.28	Inf	-Inf	86.13	3	Vertical	276	1.08	-	31.91	7.03	33.79			
PK	5.7328G	62.29	68.20	-5.91	56.98	3	Vertical	276	1.08	-	32.00	7.09	33.78			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TX

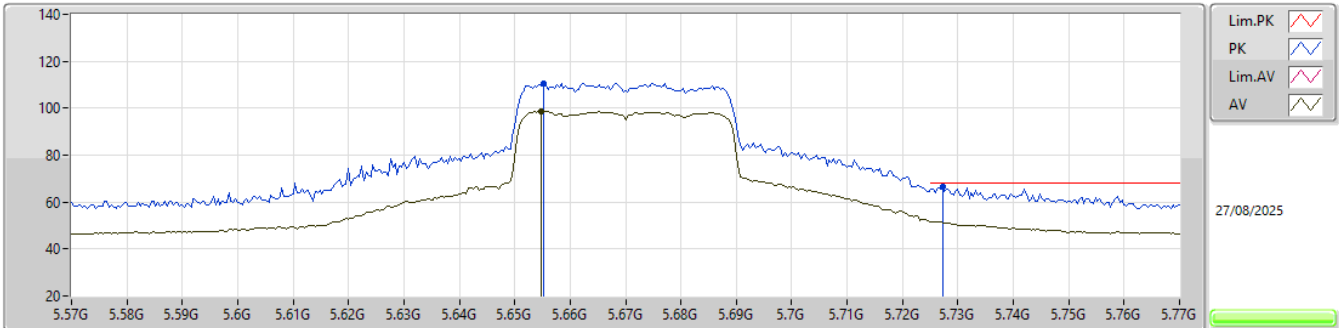


EUT_Z_1TX
Setting 19.5
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6552G	110.56	Inf	-Inf	105.64	3	Horizontal	15	2.73	-	31.73	6.98	33.79			
AV	5.6548G	98.72	Inf	-Inf	93.80	3	Horizontal	15	2.73	-	31.73	6.98	33.79			
PK	5.7272G	66.55	68.20	-1.65	61.25	3	Horizontal	15	2.73	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TX

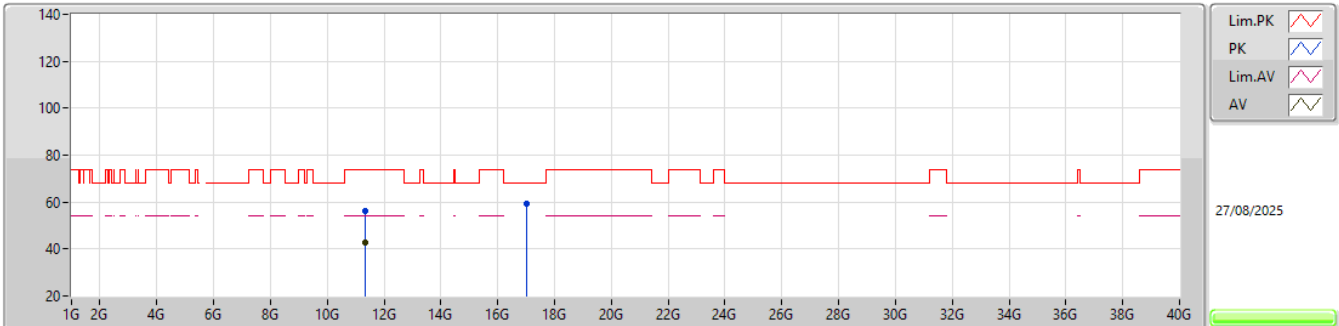


EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.3421G	56.19	74.00	-17.81	70.97	3	Vertical	73	2.84	-	39.77	11.65	66.20				
AV	11.33863G	43.00	54.00	-11.00	57.80	3	Vertical	73	2.84	-	39.75	11.65	66.20				
PK	17.01231G	59.09	68.20	-9.11	69.42	3	Vertical	3	1.65	-	40.20	13.76	64.29				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5670MHz_TX

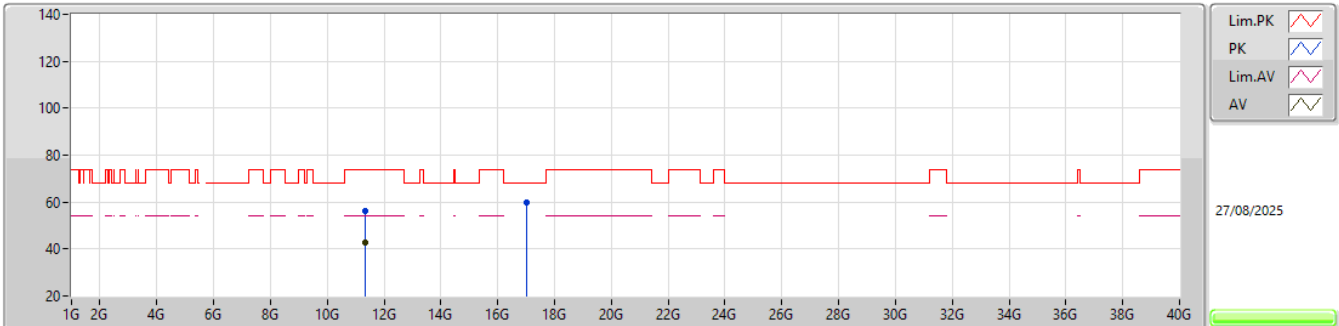EUT_Z_1TX
Setting 19.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33778G	56.34	74.00	-17.66	71.14	3	Horizontal	70	1.58	-	39.75	11.65	66.20			
AV	11.339G	42.92	54.00	-11.08	57.71	3	Horizontal	70	1.58	-	39.76	11.65	66.20			
PK	17.01213G	59.78	68.20	-8.42	70.11	3	Horizontal	212	2.87	-	40.20	13.76	64.29			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TX

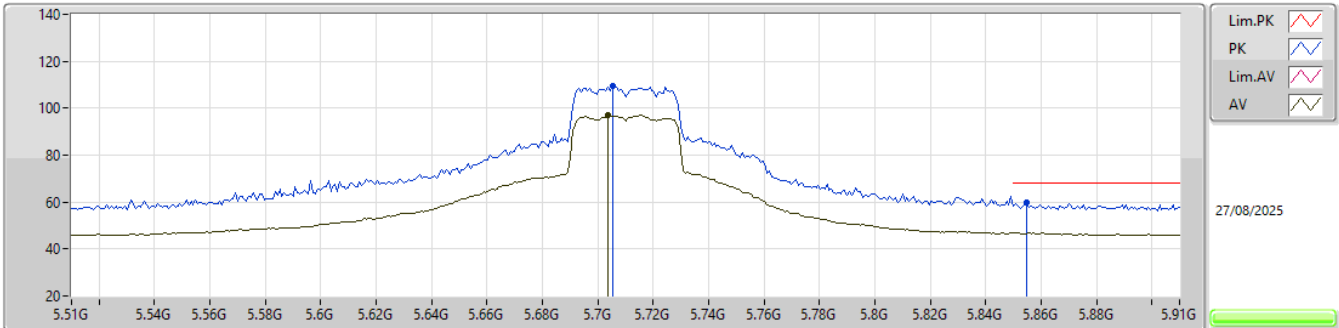


EUT_Z_1TX
Setting 25.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7052G	109.31	Inf	-Inf	104.05	3	Vertical	108	2.69	-	32.00	7.05	33.79			
AV	5.7036G	96.86	Inf	-Inf	91.60	3	Vertical	108	2.69	-	32.00	7.05	33.79			
PK	5.8548G	59.67	68.20	-8.53	54.11	3	Vertical	108	2.69	-	32.11	7.22	33.77			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TX

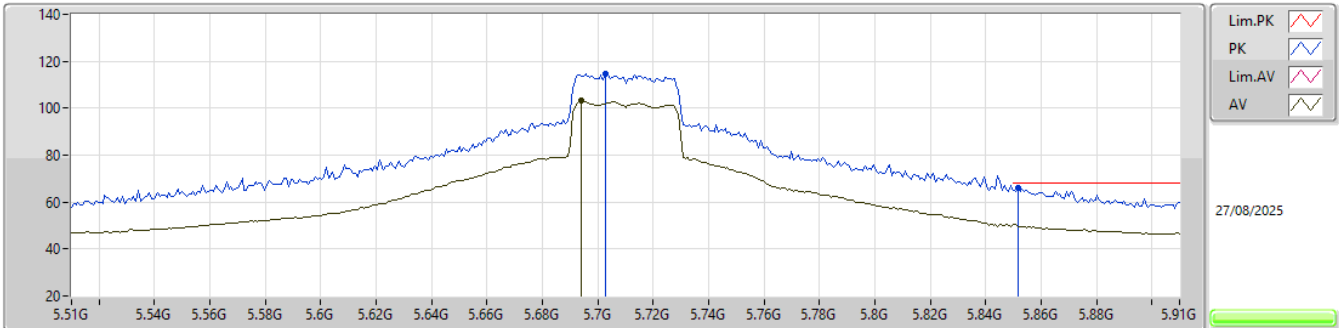


EUT_Z_1TX
Setting 25.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7028G	114.64	Inf	-Inf	109.38	3	Horizontal	187	3.00	-	32.00	7.05	33.79			
AV	5.694G	103.08	Inf	-Inf	97.87	3	Horizontal	187	3.00	-	31.96	7.04	33.79			
PK	5.8516G	66.12	68.20	-2.08	60.57	3	Horizontal	187	3.00	-	32.10	7.22	33.77			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TX

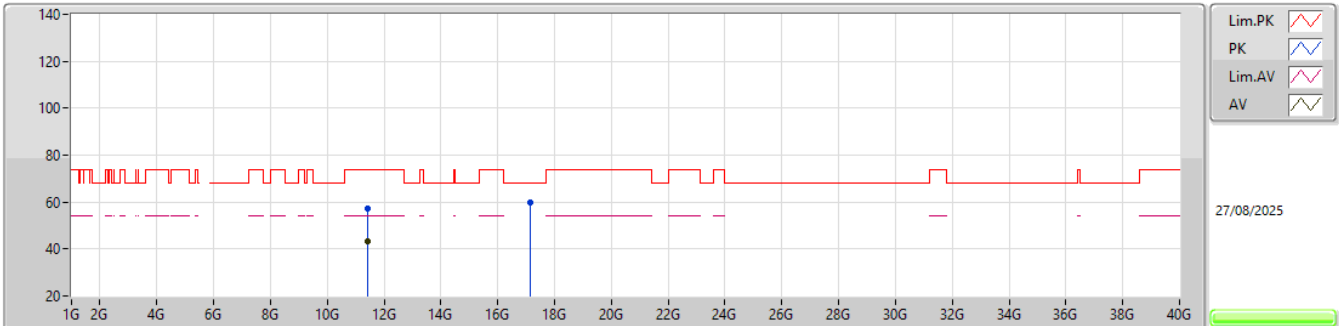


EUT_Z_1TX
Setting 25.5
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.42189G	57.11	74.00	-16.89	71.81	3	Vertical	186	1.05	-	39.80	11.70	66.20			
AV	11.42052G	43.30	54.00	-10.70	58.00	3	Vertical	186	1.05	-	39.80	11.70	66.20			
PK	17.12797G	59.86	68.20	-8.34	69.98	3	Vertical	130	1.43	-	40.36	13.80	64.28			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5710MHz Straddle 5.47-5.725GHz_TX

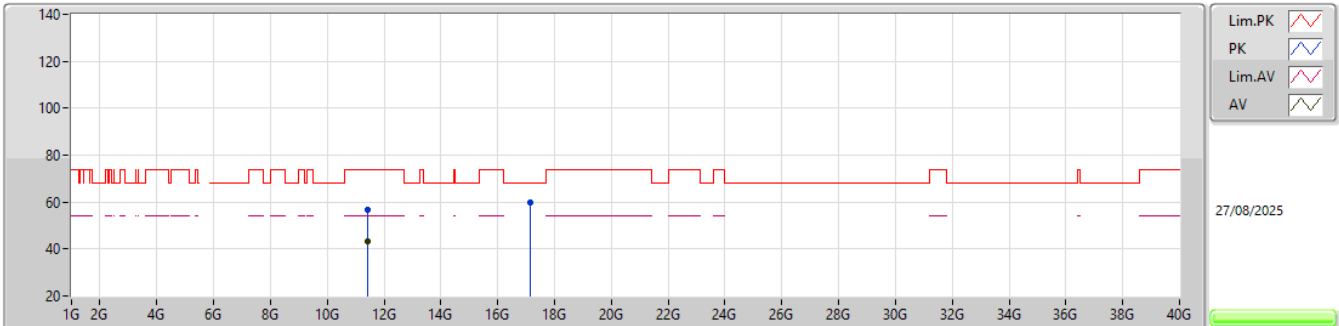EUT_Z_1TX
Setting 25.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.41938G	56.92	74.00	-17.08	71.62	3	Horizontal	67	2.85	-	39.80	11.70	66.20			
AV	11.41997G	43.08	54.00	-10.92	57.78	3	Horizontal	67	2.85	-	39.80	11.70	66.20			
PK	17.12898G	60.08	68.20	-8.12	70.20	3	Horizontal	109	1.27	-	40.36	13.80	64.28			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TX

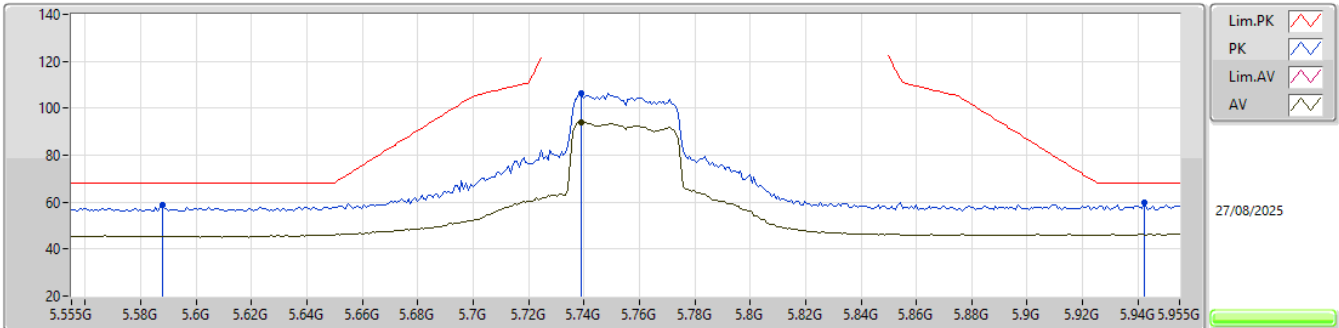


EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.5878G	58.58	68.20	-9.62	53.85	3	Vertical	105	2.68	-	31.62	6.91	33.80				
PK	5.739G	106.38	Inf	-Inf	101.06	3	Vertical	105	2.68	-	32.00	7.10	33.78				
AV	5.739G	94.15	Inf	-Inf	88.83	3	Vertical	105	2.68	-	32.00	7.10	33.78				
PK	5.9422G	59.65	68.20	-8.55	53.85	3	Vertical	105	2.68	-	32.28	7.28	33.76				

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TX

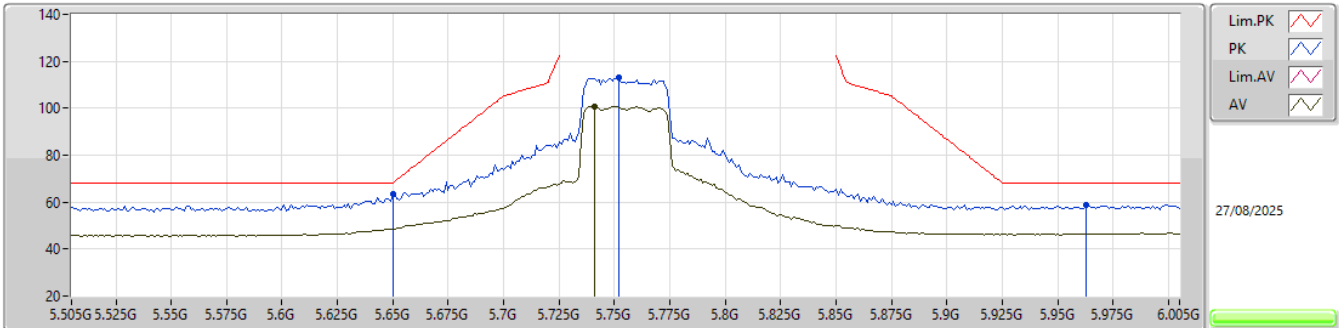


EUT_Z_1TX
Setting 20.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.65G	63.48	68.20	-4.72	58.59	3	Horizontal	187	2.81	-	31.70	6.98	33.79			
PK	5.752G	113.16	Inf	-Inf	107.82	3	Horizontal	187	2.81	-	32.00	7.12	33.78			
AV	5.741G	100.72	Inf	-Inf	95.40	3	Horizontal	187	2.81	-	32.00	7.10	33.78			
PK	5.963G	58.74	68.20	-9.46	52.87	3	Horizontal	187	2.81	-	32.33	7.29	33.75			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TX

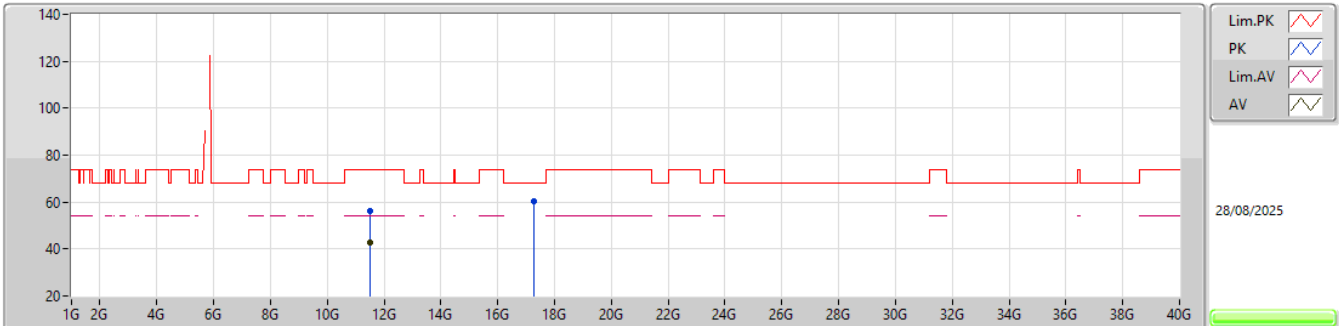


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50812G	56.45	74.00	-17.55	71.10	3	Vertical	185	1.88	-	39.78	11.76	66.19			
AV	11.50981G	42.86	54.00	-11.14	57.51	3	Vertical	185	1.88	-	39.78	11.76	66.19			
PK	17.26612G	60.29	68.20	-7.91	69.88	3	Vertical	357	2.28	-	40.83	13.85	64.27			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TX

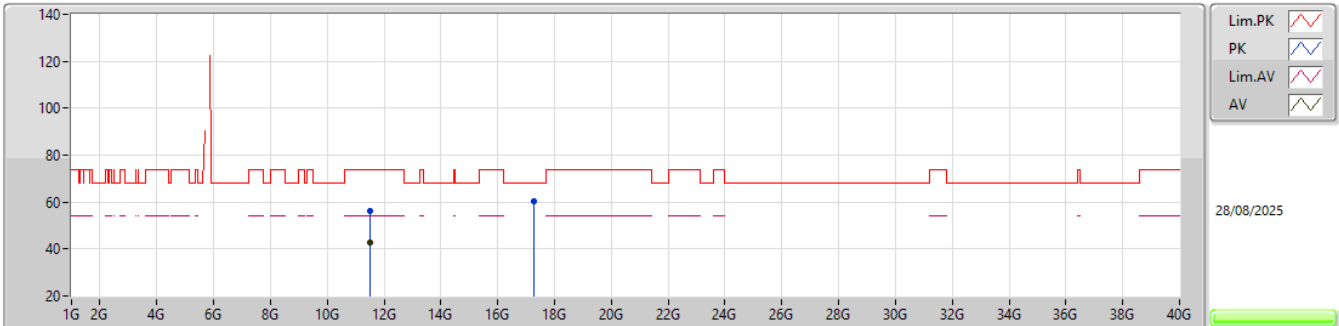


EUT_Z_1TX
Setting 20.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5095G	56.28	74.00	-17.72	70.93	3	Horizontal	105	1.48	-	39.78	11.76	66.19			
AV	11.51003G	42.62	54.00	-11.38	57.27	3	Horizontal	105	1.48	-	39.78	11.76	66.19			
PK	17.26284G	60.30	68.20	-7.90	69.89	3	Horizontal	110	2.48	-	40.83	13.85	64.27			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX


5795MHz_TX

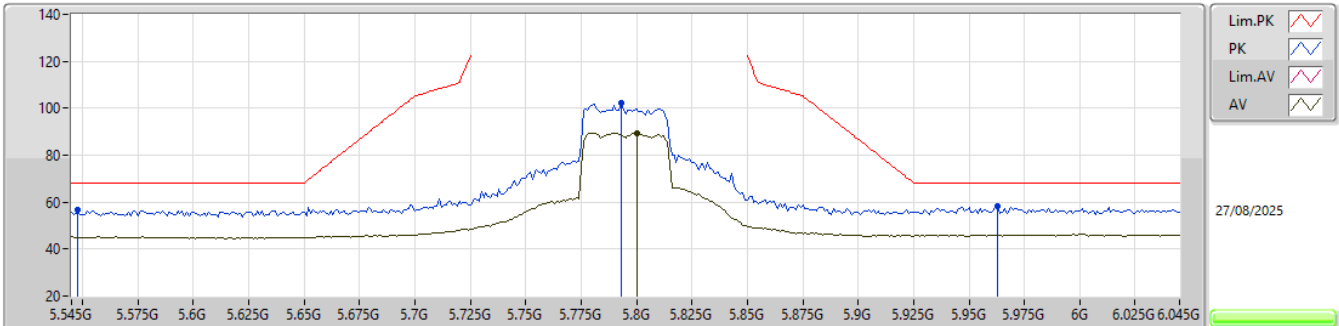EUT_Z_1TX
Setting 22
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.548G	56.68	68.20	-11.52	51.88	3	Vertical	181	1.16	-	31.70	6.90	33.80			
PK	5.793G	101.99	Inf	-Inf	96.59	3	Vertical	181	1.16	-	32.00	7.17	33.77			
AV	5.8G	89.55	Inf	-Inf	84.14	3	Vertical	181	1.16	-	32.00	7.18	33.77			
PK	5.963G	58.10	68.20	-10.10	52.23	3	Vertical	181	1.16	-	32.33	7.29	33.75			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TX

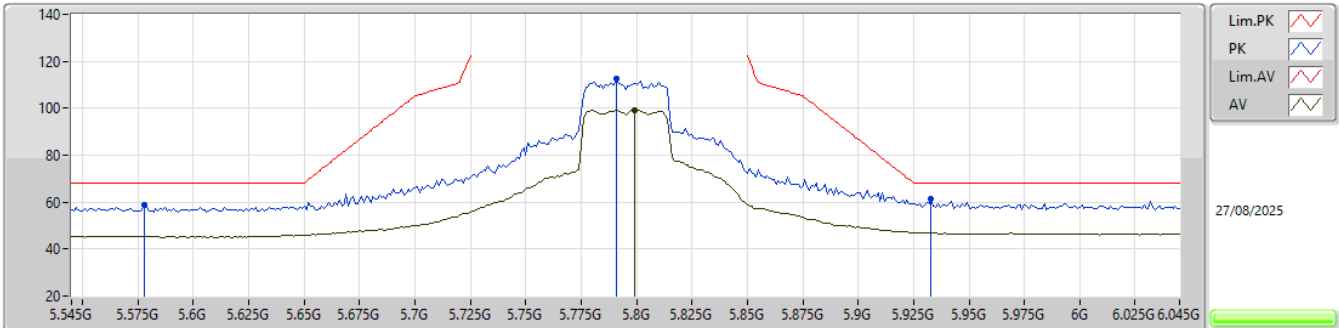


EUT_Z_1TX
Setting 22
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.578G	58.74	68.20	-9.46	53.99	3	Horizontal	2	1.03	-	31.64	6.91	33.80			
PK	5.791G	112.46	Inf	-Inf	107.07	3	Horizontal	2	1.03	-	32.00	7.17	33.78			
AV	5.799G	99.26	Inf	-Inf	93.85	3	Horizontal	2	1.03	-	32.00	7.18	33.77			
PK	5.933G	61.45	68.20	-6.75	55.67	3	Horizontal	2	1.03	-	32.27	7.27	33.76			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TX

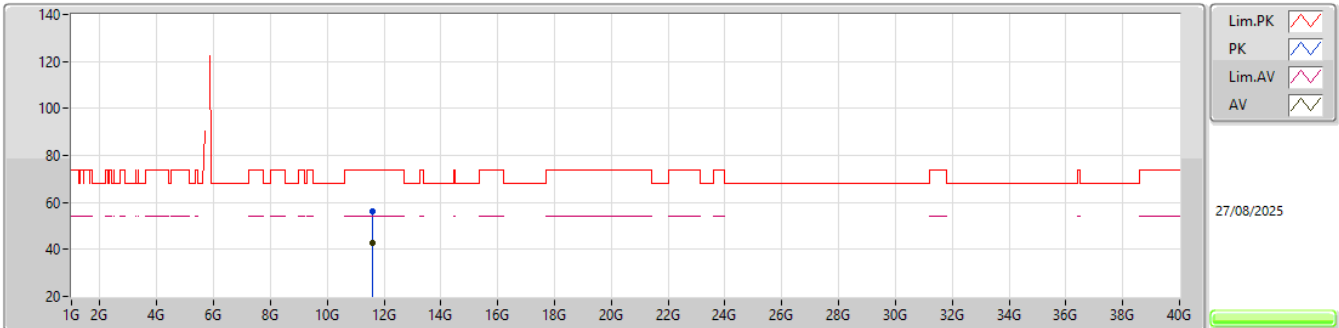


EUT_Z_1TX
Setting 22
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.59034G	56.34	74.00	-17.66	71.11	3	Vertical	3	1.21	-	39.54	11.81	66.12			
AV	11.59234G	42.61	54.00	-11.39	57.38	3	Vertical	3	1.21	-	39.53	11.82	66.12			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TX

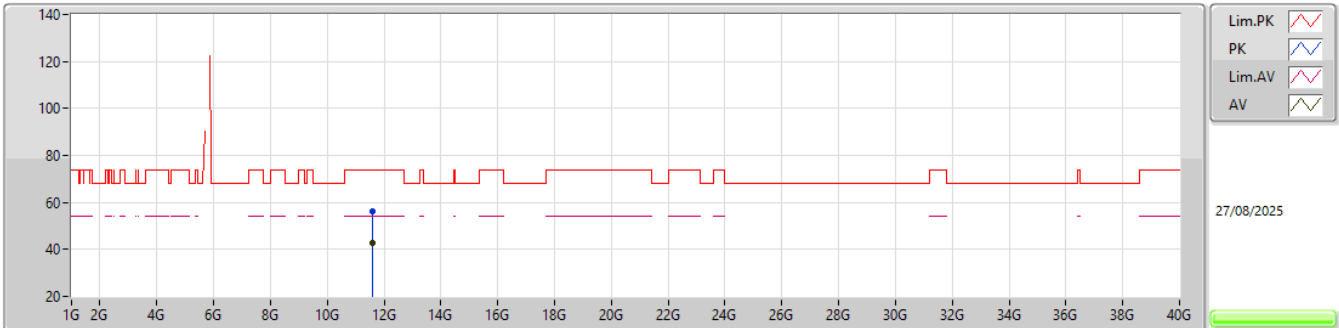


EUT_Z_1TX
Setting 22
06-E-S-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5904G	56.36	74.00	-17.64	71.13	3	Horizontal	295	1.53	-	39.54	11.81	66.12			
AV	11.58789G	42.55	54.00	-11.45	57.31	3	Horizontal	295	1.53	-	39.55	11.81	66.12			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5210MHz_TX

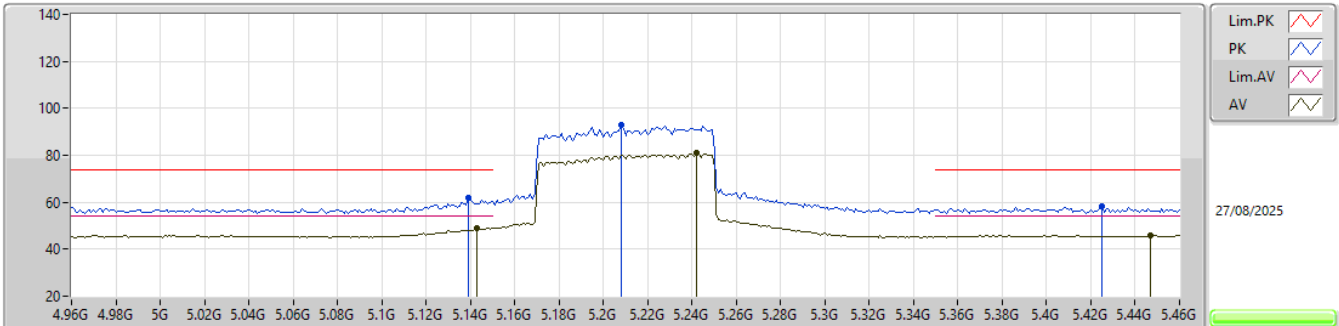EUT_Z_1TX
Setting 5.5
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.139G	61.66	74.00	-12.34	56.76	3	Vertical	82	2.82	-	31.86	6.76	33.72			
AV	5.143G	49.01	54.00	-4.99	44.09	3	Vertical	82	2.82	-	31.87	6.77	33.72			
PK	5.208G	93.15	Inf	-Inf	88.48	3	Vertical	82	2.82	-	31.55	6.85	33.73			
AV	5.242G	80.82	Inf	-Inf	76.35	3	Vertical	82	2.82	-	31.35	6.86	33.74			
PK	5.425G	58.30	74.00	-15.70	53.76	3	Vertical	82	2.82	-	31.45	6.88	33.79			
AV	5.447G	45.85	54.00	-8.15	41.27	3	Vertical	82	2.82	-	31.49	6.89	33.80			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5210MHz_TX

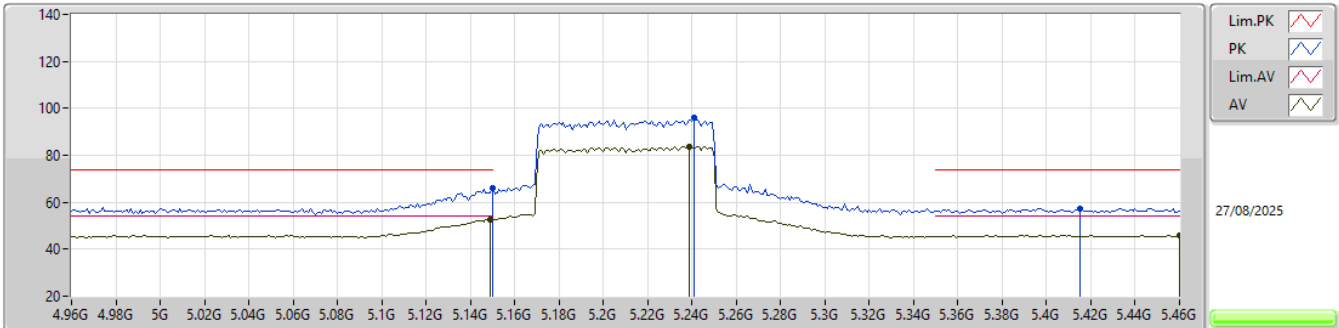EUT_Z_1TX
Setting 5.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	66.03	74.00	-7.97	61.07	3	Horizontal	23	2.53	-	31.90	6.78	33.72			
AV	5.149G	52.82	54.00	-1.18	47.86	3	Horizontal	23	2.53	-	31.90	6.78	33.72			
PK	5.241G	96.03	Inf	-Inf	91.56	3	Horizontal	23	2.53	-	31.35	6.86	33.74			
AV	5.239G	83.86	Inf	-Inf	79.37	3	Horizontal	23	2.53	-	31.37	6.86	33.74			
PK	5.415G	57.49	74.00	-16.51	52.97	3	Horizontal	23	2.53	-	31.43	6.88	33.79			
AV	5.46G	46.02	54.00	-7.98	41.39	3	Horizontal	23	2.53	-	31.54	6.89	33.80			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5210MHz_TX

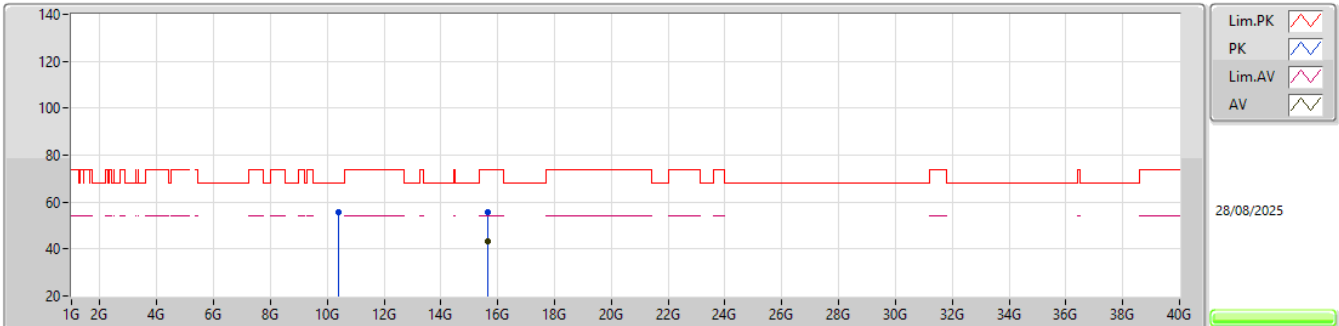EUT_Z_1TX
Setting 5.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41868G	55.47	68.20	-12.73	71.28	3	Vertical	238	2.51	-	39.84	11.05	66.70			
PK	15.63199G	55.56	74.00	-18.44	67.85	3	Vertical	325	1.15	-	38.41	13.16	63.86			
AV	15.63141G	43.41	54.00	-10.59	55.70	3	Vertical	325	1.15	-	38.41	13.16	63.86			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5210MHz_TX

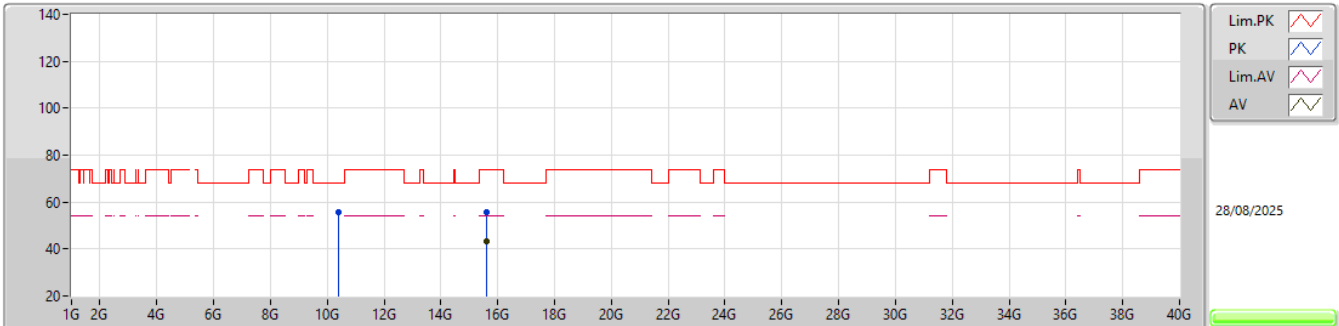EUT_Z_1TX
Setting 5.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41847G	55.47	68.20	-12.73	71.28	3	Horizontal	59	2.11	-	39.84	11.05	66.70			
PK	15.62802G	55.54	74.00	-18.46	67.81	3	Horizontal	303	1.80	-	38.43	13.16	63.86			
AV	15.62973G	43.51	54.00	-10.49	55.79	3	Horizontal	303	1.80	-	38.42	13.16	63.86			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX


5290MHz_TX

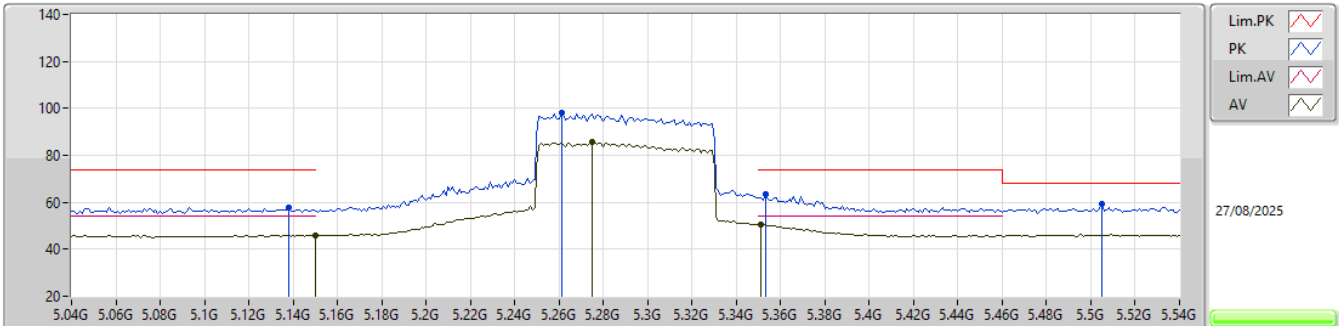EUT_Z_1TX
Setting 10
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.138G	57.87	74.00	-16.13	52.98	3	Vertical	84	2.66	-	31.85	6.76	33.72			
AV	5.15G	45.92	54.00	-8.08	40.96	3	Vertical	84	2.66	-	31.90	6.78	33.72			
PK	5.261G	98.07	Inf	-Inf	93.68	3	Vertical	84	2.66	-	31.28	6.86	33.75			
AV	5.275G	85.45	Inf	-Inf	81.09	3	Vertical	84	2.66	-	31.25	6.86	33.75			
PK	5.353G	63.50	74.00	-10.50	59.09	3	Vertical	84	2.66	-	31.31	6.87	33.77			
AV	5.351G	50.69	54.00	-3.31	46.29	3	Vertical	84	2.66	-	31.30	6.87	33.77			
PK	5.505G	59.21	68.20	-8.99	54.42	3	Vertical	84	2.66	-	31.70	6.90	33.81			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_1TX


5290MHz_TX

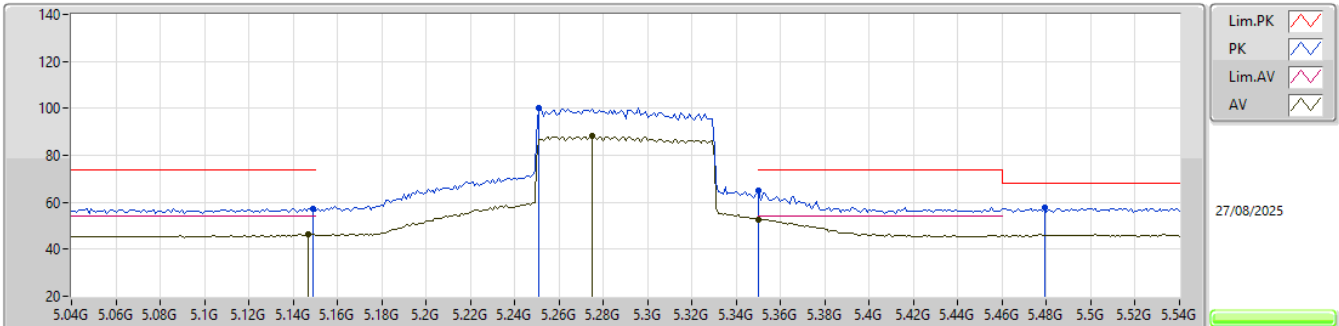EUT_Z_1TX
Setting 10
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.149G	57.45	74.00	-16.55	52.49	3	Horizontal	18	2.64	-	31.90	6.78	33.72			
AV	5.147G	46.22	54.00	-7.78	41.28	3	Horizontal	18	2.64	-	31.89	6.77	33.72			
PK	5.251G	100.35	Inf	-Inf	95.94	3	Horizontal	18	2.64	-	31.30	6.86	33.75			
AV	5.275G	88.18	Inf	-Inf	83.82	3	Horizontal	18	2.64	-	31.25	6.86	33.75			
PK	5.35G	65.18	74.00	-8.82	60.78	3	Horizontal	18	2.64	-	31.30	6.87	33.77			
AV	5.35G	52.80	54.00	-1.20	48.40	3	Horizontal	18	2.64	-	31.30	6.87	33.77			
PK	5.479G	57.80	68.20	-10.40	53.09	3	Horizontal	18	2.64	-	31.62	6.89	33.80			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5290MHz_TX

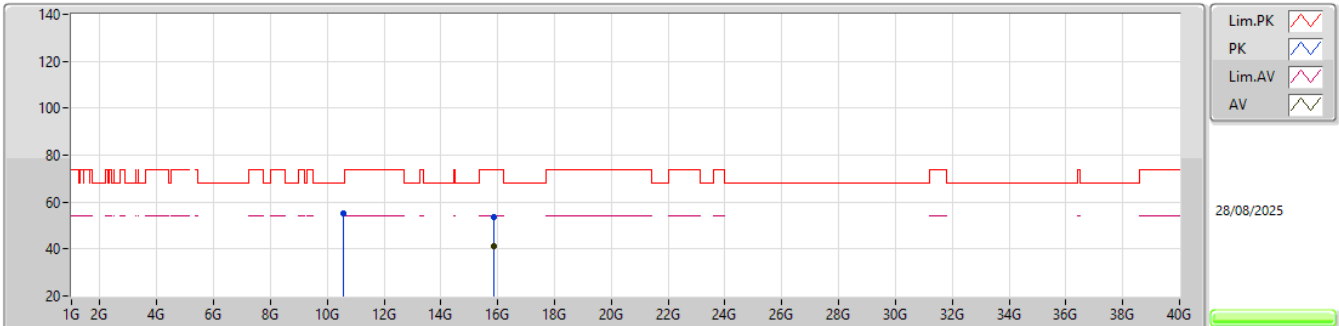EUT_Z_1TX
Setting 10
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57815G	55.01	68.20	-13.19	70.64	3	Vertical	336	1.77	-	39.86	11.16	66.65			
PK	15.86839G	53.73	74.00	-20.27	66.31	3	Vertical	207	1.23	-	38.04	13.33	63.95			
AV	15.87133G	41.43	54.00	-12.57	54.01	3	Vertical	207	1.23	-	38.04	13.33	63.95			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5290MHz_TX

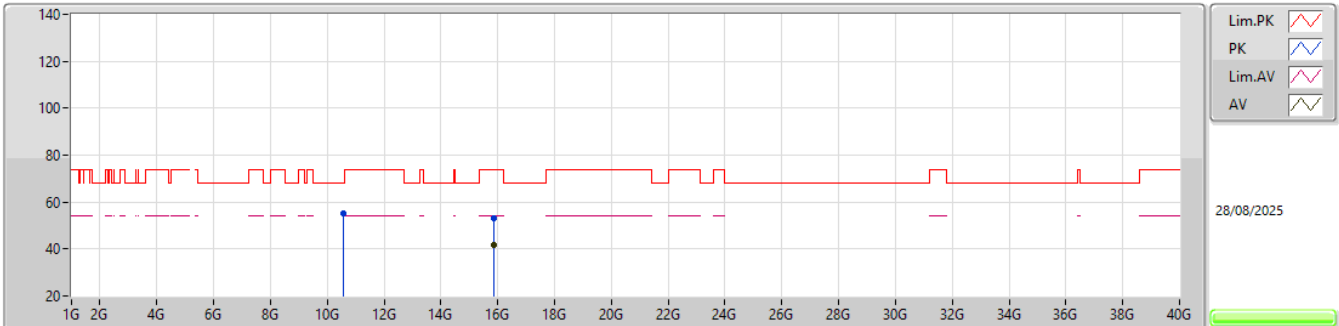EUT_Z_1TX
Setting 10
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57912G	55.05	68.20	-13.15	70.67	3	Horizontal	299	1.09	-	39.86	11.16	66.64			
PK	15.87219G	53.36	74.00	-20.64	65.94	3	Horizontal	127	2.23	-	38.04	13.33	63.95			
AV	15.86884G	41.53	54.00	-12.47	54.11	3	Horizontal	127	2.23	-	38.04	13.33	63.95			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

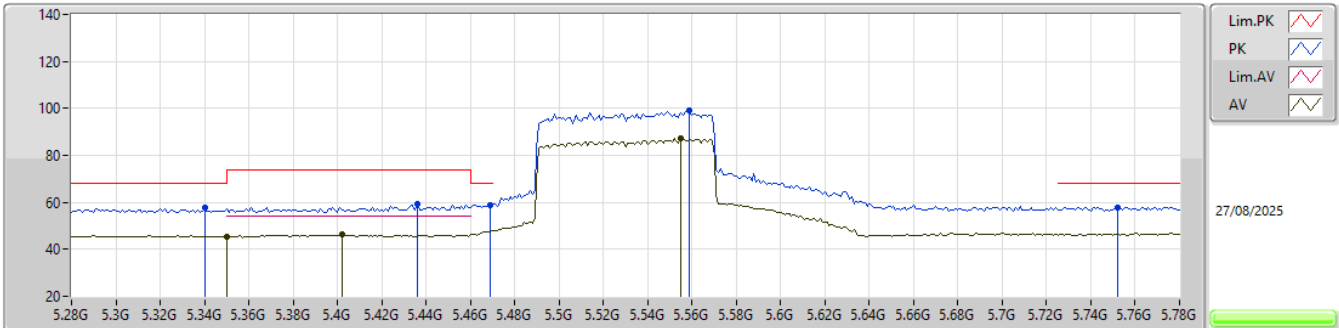


EUT_Z_1TX
Setting 14.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.34G	57.83	68.20	-10.37	53.45	3	Vertical	64	2.93	-	31.28	6.87	33.77
AV	5.35G	45.56	54.00	-8.44	41.16	3	Vertical	64	2.93	-	31.30	6.87	33.77
PK	5.436G	59.07	74.00	-14.93	54.50	3	Vertical	64	2.93	-	31.47	6.89	33.79
AV	5.402G	46.35	54.00	-7.65	41.85	3	Vertical	64	2.93	-	31.40	6.88	33.78
PK	5.469G	59.05	68.20	-9.15	54.38	3	Vertical	64	2.93	-	31.58	6.89	33.80
PK	5.559G	98.90	Inf	-Inf	94.12	3	Vertical	64	2.93	-	31.68	6.90	33.80
AV	5.555G	87.07	Inf	-Inf	82.28	3	Vertical	64	2.93	-	31.69	6.90	33.80
PK	5.752G	57.99	68.20	-10.21	52.65	3	Vertical	64	2.93	-	32.00	7.12	33.78

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

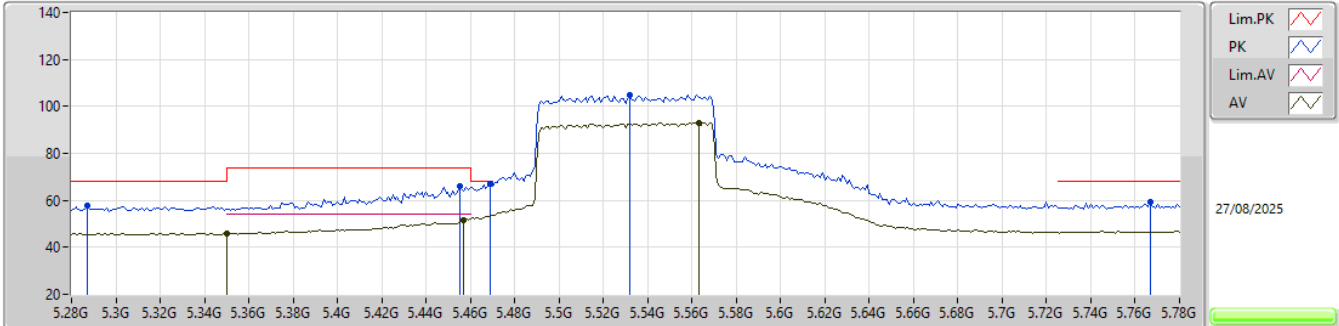


EUT_Z_1TX
Setting 14.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.287G	57.74	68.20	-10.46	53.40	3	Horizontal	189	2.70	-	31.23	6.86	33.75
AV	5.35G	46.12	54.00	-7.88	41.72	3	Horizontal	189	2.70	-	31.30	6.87	33.77
PK	5.455G	66.15	74.00	-7.85	61.54	3	Horizontal	189	2.70	-	31.52	6.89	33.80
AV	5.457G	51.42	54.00	-2.58	46.80	3	Horizontal	189	2.70	-	31.53	6.89	33.80
PK	5.469G	66.99	68.20	-1.21	62.32	3	Horizontal	189	2.70	-	31.58	6.89	33.80
PK	5.532G	104.82	Inf	-Inf	100.03	3	Horizontal	189	2.70	-	31.70	6.90	33.81
AV	5.563G	93.13	Inf	-Inf	88.36	3	Horizontal	189	2.70	-	31.67	6.90	33.80
PK	5.767G	59.10	68.20	-9.10	53.74	3	Horizontal	189	2.70	-	32.00	7.14	33.78

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5530MHz_TX

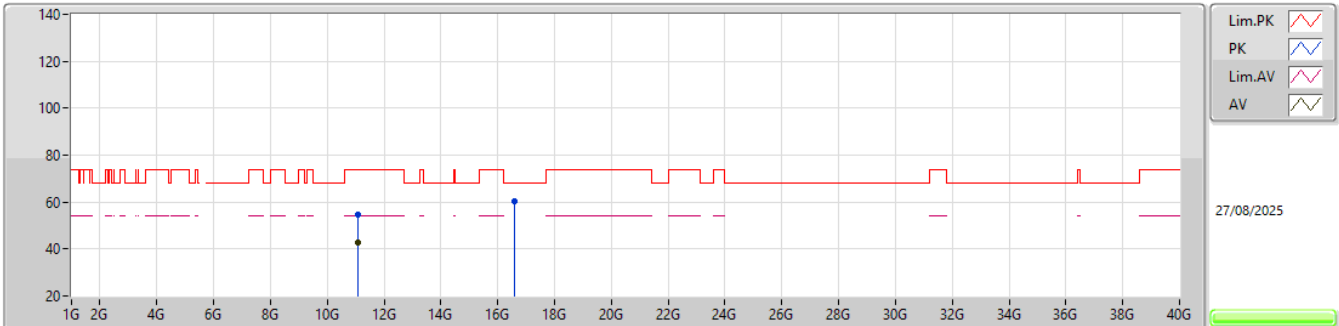EUT_Z_1TX
Setting 14.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06024G	54.76	74.00	-19.24	69.54	3	Vertical	31	1.97	-	39.94	11.47	66.19			
AV	11.06138G	42.61	54.00	-11.39	57.40	3	Vertical	31	1.97	-	39.93	11.47	66.19			
PK	16.58994G	60.58	68.20	-7.62	71.26	3	Vertical	354	1.34	-	39.54	13.62	63.84			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TX

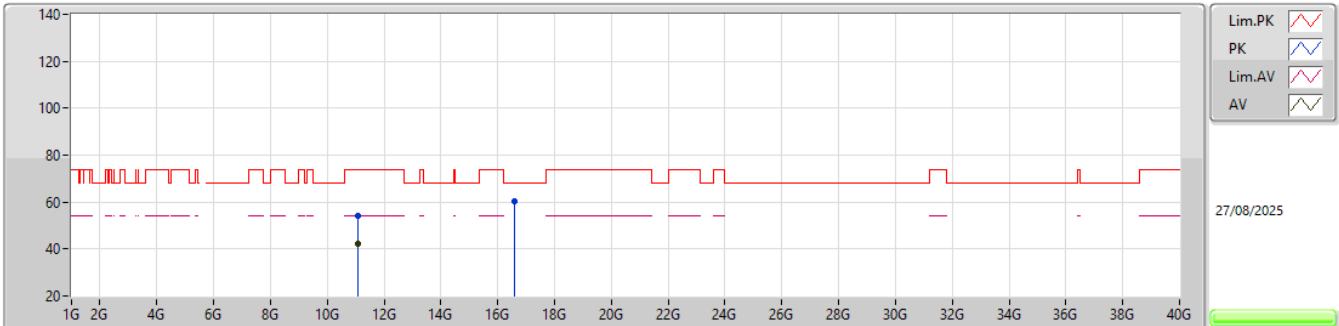


EUT_Z_1TX
Setting 14.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06063G	54.21	74.00	-19.79	68.99	3	Horizontal	87	2.53	-	39.94	11.47	66.19			
AV	11.06105G	42.25	54.00	-11.75	57.04	3	Horizontal	87	2.53	-	39.93	11.47	66.19			
PK	16.59007G	60.22	68.20	-7.98	70.90	3	Horizontal	211	2.66	-	39.54	13.62	63.84			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5610MHz_TX

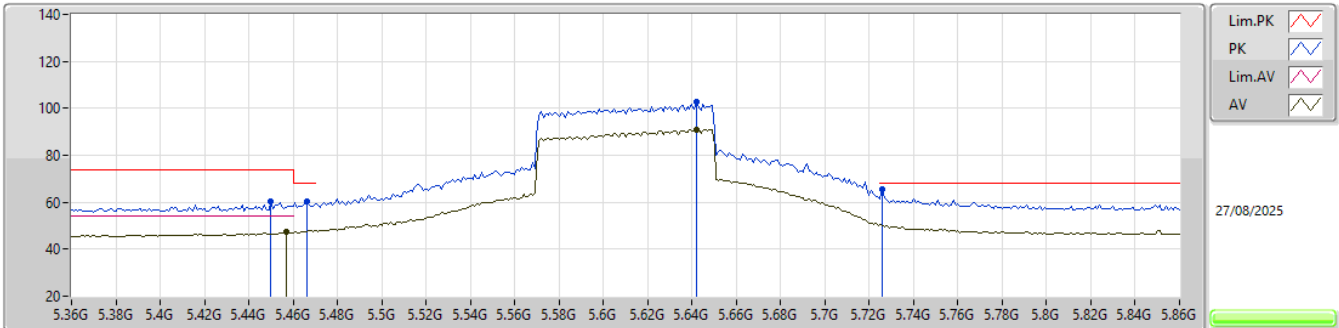
EUT_Z_1TX
Setting 18
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.45G	60.30	74.00	-13.70	55.71	3	Vertical	53	2.96	-	31.50	6.89	33.80			
AV	5.457G	47.27	54.00	-6.73	42.65	3	Vertical	53	2.96	-	31.53	6.89	33.80			
PK	5.466G	60.57	68.20	-7.63	55.92	3	Vertical	53	2.96	-	31.56	6.89	33.80			
PK	5.642G	102.97	Inf	-Inf	98.11	3	Vertical	53	2.96	-	31.68	6.97	33.79			
AV	5.642G	90.75	Inf	-Inf	85.89	3	Vertical	53	2.96	-	31.68	6.97	33.79			
PK	5.726G	65.33	68.20	-2.87	60.03	3	Vertical	53	2.96	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5610MHz_TX

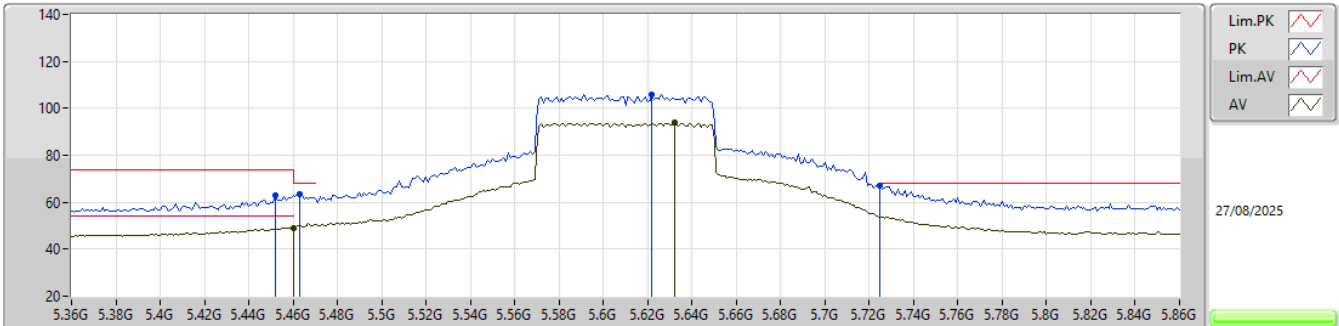EUT_Z_1TX
Setting 18
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.452G	63.08	74.00	-10.92	58.48	3	Horizontal	3	2.29	-	31.51	6.89	33.80			
PK	5.463G	63.45	68.20	-4.75	58.81	3	Horizontal	3	2.29	-	31.55	6.89	33.80			
AV	5.46G	49.21	54.00	-4.79	44.58	3	Horizontal	3	2.29	-	31.54	6.89	33.80			
PK	5.622G	106.12	Inf	-Inf	101.34	3	Horizontal	3	2.29	-	31.64	6.94	33.80			
AV	5.632G	93.91	Inf	-Inf	89.09	3	Horizontal	3	2.29	-	31.66	6.95	33.79			
PK	5.725G	66.90	68.20	-1.30	61.60	3	Horizontal	3	2.29	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5610MHz_TX

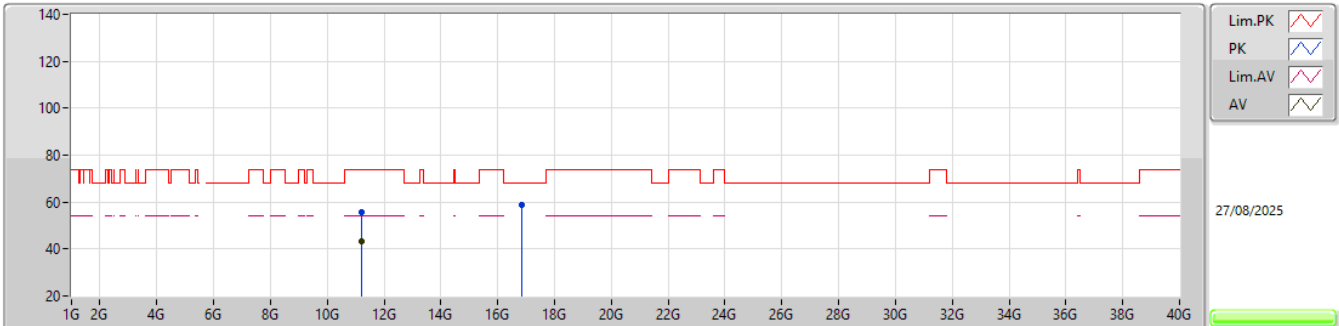EUT_Z_1TX
Setting 18
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.22115G	55.51	74.00	-18.49	70.69	3	Vertical	146	2.88	-	39.44	11.57	66.19			
AV	11.21847G	43.53	54.00	-10.47	58.71	3	Vertical	146	2.88	-	39.44	11.57	66.19			
PK	16.82848G	58.89	68.20	-9.31	68.53	3	Vertical	9	2.86	-	40.76	13.70	64.10			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5610MHz_TX

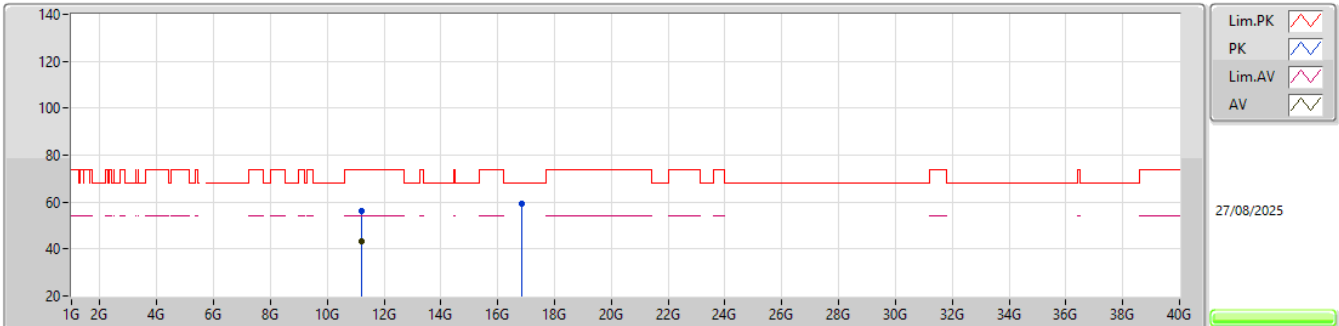EUT_Z_1TX
Setting 18
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21815G	56.01	74.00	-17.99	71.19	3	Horizontal	239	1.60	-	39.44	11.57	66.19			
AV	11.2212G	43.41	54.00	-10.59	58.59	3	Horizontal	239	1.60	-	39.44	11.57	66.19			
PK	16.83069G	59.26	68.20	-8.94	68.90	3	Horizontal	162	2.62	-	40.76	13.70	64.10			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5690MHz Straddle 5.47-5.725GHz_TX

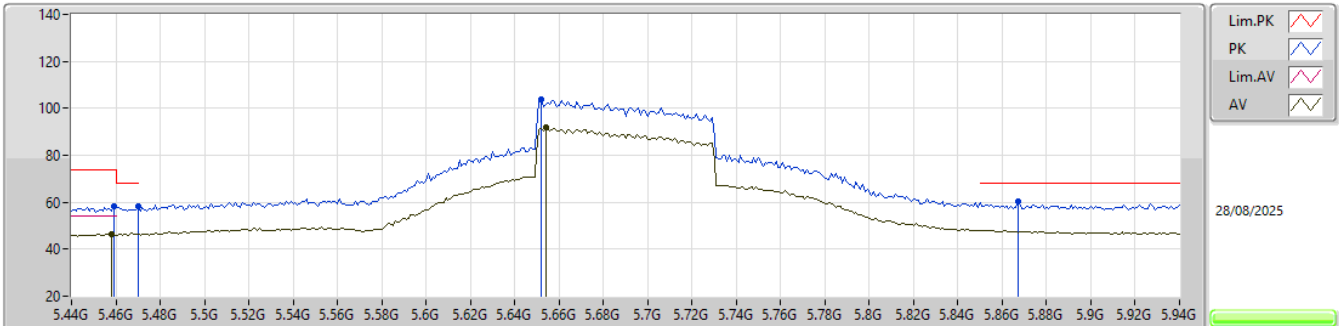EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.459G	58.38	74.00	-15.62	53.75	3	Vertical	23	2.79	-	31.54	6.89	33.80				
AV	5.458G	46.36	54.00	-7.64	41.74	3	Vertical	23	2.79	-	31.53	6.89	33.80				
PK	5.47G	58.38	68.20	-9.82	53.71	3	Vertical	23	2.79	-	31.58	6.89	33.80				
PK	5.652G	103.63	Inf	-Inf	98.73	3	Vertical	23	2.79	-	31.71	6.98	33.79				
AV	5.654G	91.70	Inf	-Inf	86.79	3	Vertical	23	2.79	-	31.72	6.98	33.79				
PK	5.867G	60.54	68.20	-7.66	54.95	3	Vertical	23	2.79	-	32.13	7.23	33.77				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TX

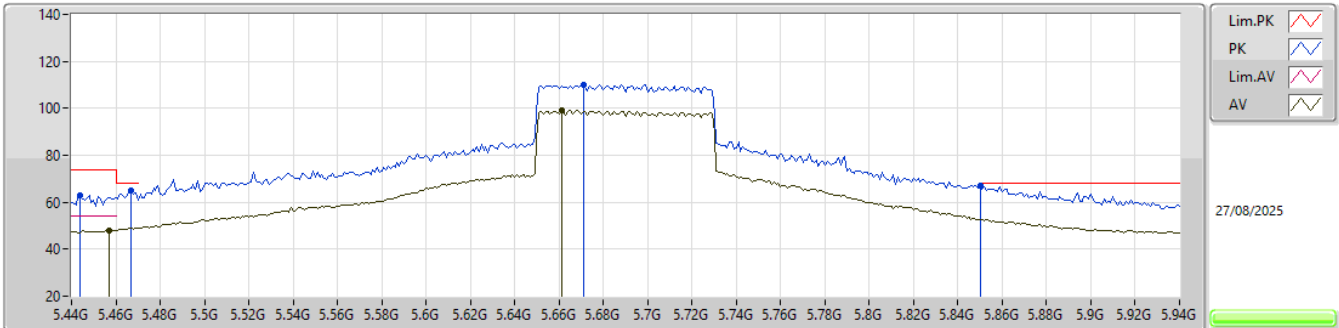


EUT_Z_1TX
Setting 21.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.444G	62.90	74.00	-11.10	58.32	3	Horizontal	193	2.60	-	31.49	6.89	33.80			
PK	5.467G	65.11	68.20	-3.09	60.45	3	Horizontal	193	2.60	-	31.57	6.89	33.80			
AV	5.457G	47.98	54.00	-6.02	43.36	3	Horizontal	193	2.60	-	31.53	6.89	33.80			
PK	5.671G	110.19	Inf	-Inf	105.14	3	Horizontal	193	2.60	-	31.83	7.01	33.79			
AV	5.661G	99.08	Inf	-Inf	94.11	3	Horizontal	193	2.60	-	31.77	6.99	33.79			
PK	5.85G	66.82	68.20	-1.38	61.27	3	Horizontal	193	2.60	-	32.10	7.22	33.77			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TX

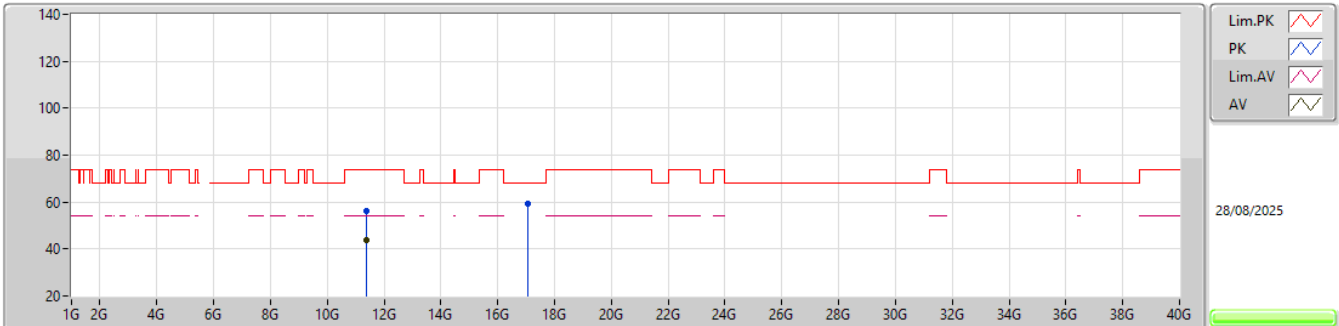


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37767G	56.29	74.00	-17.71	71.01	3	Vertical	217	2.17	-	39.80	11.68	66.20			
AV	11.37846G	43.94	54.00	-10.06	58.66	3	Vertical	217	2.17	-	39.80	11.68	66.20			
PK	17.07068G	59.10	68.20	-9.10	69.19	3	Vertical	8	1.77	-	40.42	13.78	64.29			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5690MHz Straddle 5.47-5.725GHz_TX

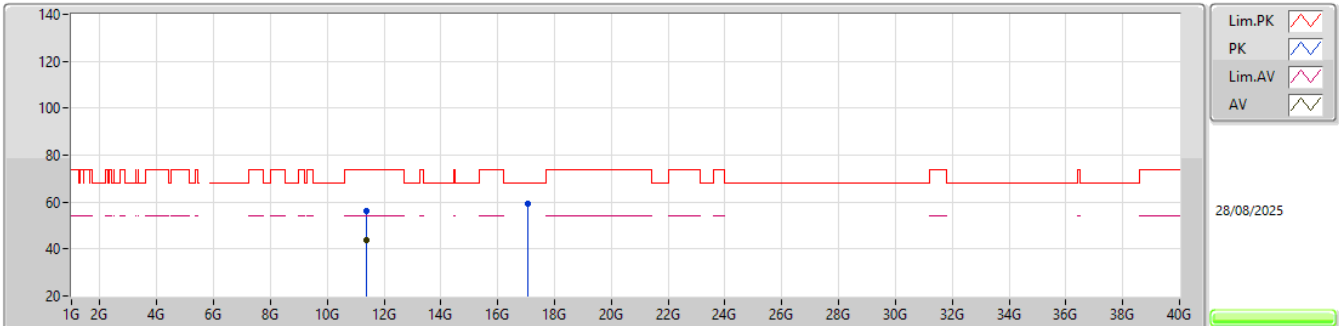EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37795G	55.99	74.00	-18.01	70.71	3	Horizontal	152	1.44	-	39.80	11.68	66.20			
AV	11.38056G	43.89	54.00	-10.11	58.61	3	Horizontal	152	1.44	-	39.80	11.68	66.20			
PK	17.06753G	59.21	68.20	-8.99	69.29	3	Horizontal	137	2.41	-	40.43	13.78	64.29			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TX

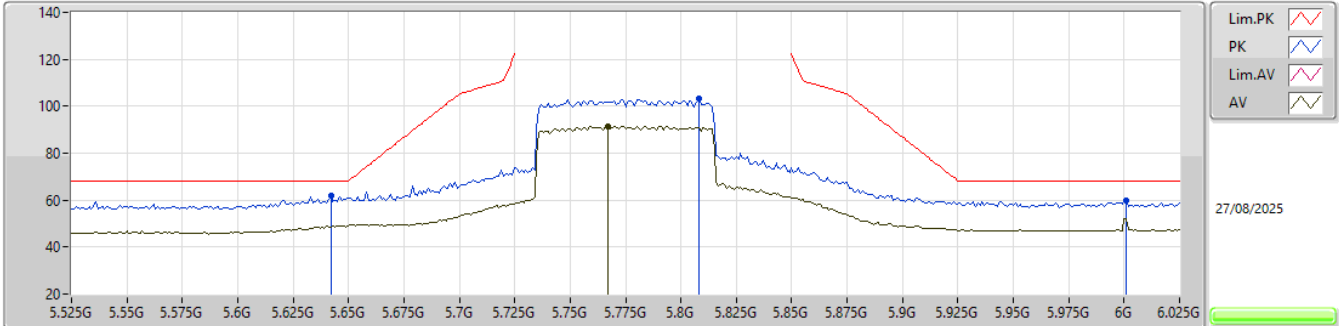


EUT_Z_1TX
Setting 17.5
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.642G	61.67	68.20	-6.53	56.81	3	Vertical	54	2.97	-	31.68	6.97	33.79				
PK	5.808G	103.25	Inf	-Inf	97.81	3	Vertical	54	2.97	-	32.02	7.19	33.77				
AV	5.767G	91.41	Inf	-Inf	86.05	3	Vertical	54	2.97	-	32.00	7.14	33.78				
PK	6.001G	59.91	68.20	-8.29	53.94	3	Vertical	54	2.97	-	32.40	7.32	33.75				

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TX

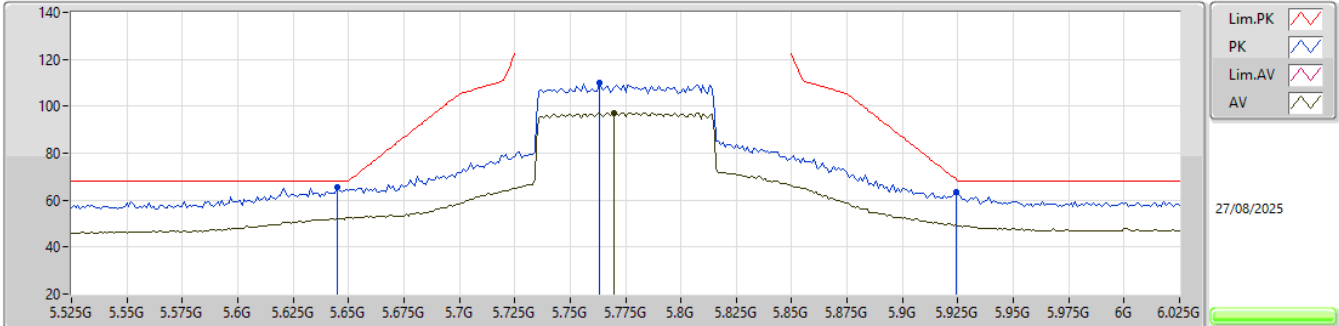


EUT_Z_1TX
Setting 17.5
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.645G	65.63	68.20	-2.57	60.76	3	Horizontal	188	2.91	-	31.69	6.97	33.79			
PK	5.763G	109.88	Inf	-Inf	104.53	3	Horizontal	188	2.91	-	32.00	7.13	33.78			
AV	5.77G	97.17	Inf	-Inf	91.81	3	Horizontal	188	2.91	-	32.00	7.14	33.78			
PK	5.924G	63.31	68.94	-5.63	57.55	3	Horizontal	188	2.91	-	32.25	7.27	33.76			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX


5775MHz_TX

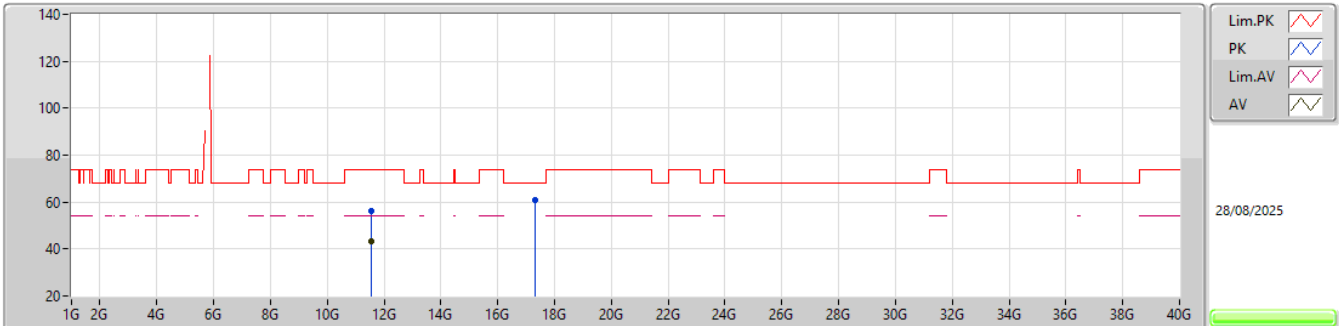EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55052G	56.32	74.00	-17.68	70.98	3	Vertical	104	1.03	-	39.70	11.79	66.15			
AV	11.55071G	43.39	54.00	-10.61	58.05	3	Vertical	104	1.03	-	39.70	11.79	66.15			
PK	17.32585G	60.64	68.20	-7.56	69.88	3	Vertical	127	1.98	-	41.16	13.87	64.27			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TX

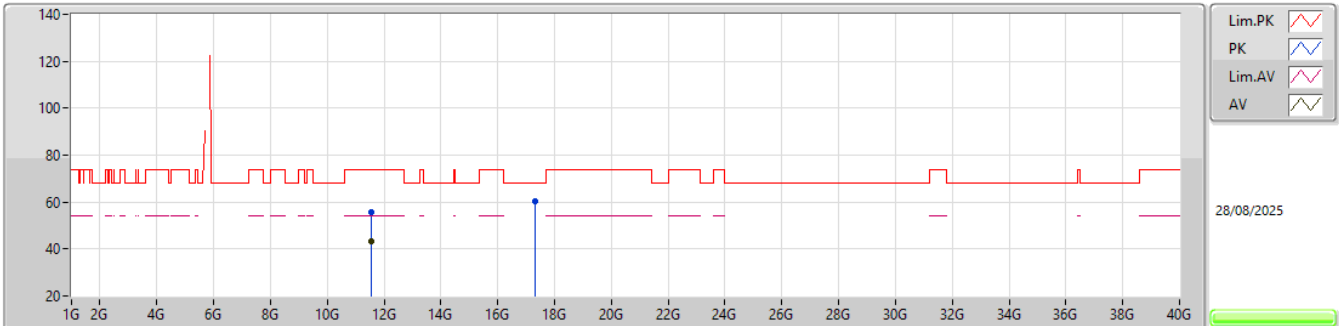

EUT_Z_1TX
Setting 17.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.5494G	55.51	74.00	-18.49	70.18	3	Horizontal	63	2.18	-	39.70	11.79	66.16			
AV	11.55004G	43.20	54.00	-10.80	57.86	3	Horizontal	63	2.18	-	39.70	11.79	66.15			
PK	17.32449G	60.52	68.20	-7.68	69.78	3	Horizontal	276	1.66	-	41.14	13.87	64.27			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	PK	5.3504G	72.94	74.00	-1.06	3	Vertical	19	1.00	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

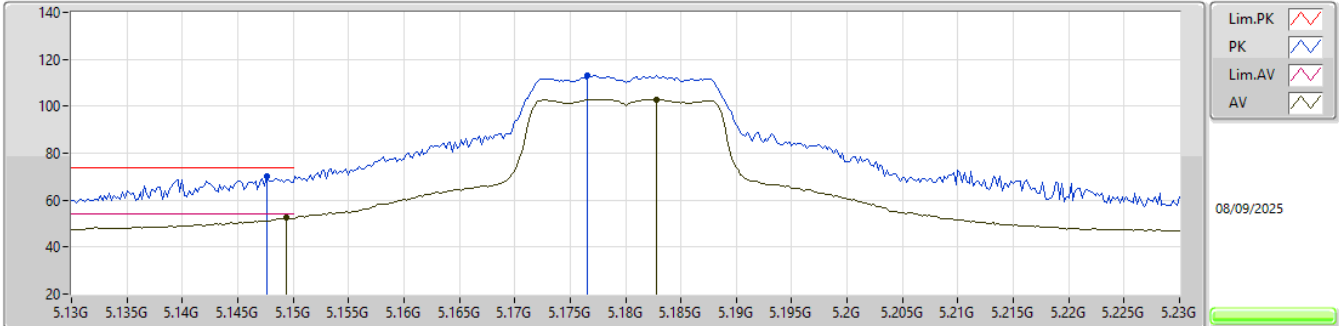


EUT_Z_1TX
Setting 17.5
06-E-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1476G	70.07	74.00	-3.93	65.13	3	Vertical	46	2.43	-	31.89	6.77	33.72			
AV	5.1494G	52.34	54.00	-1.66	47.38	3	Vertical	46	2.43	-	31.90	6.78	33.72			
PK	5.1766G	113.09	Inf	-Inf	108.26	3	Vertical	46	2.43	-	31.74	6.82	33.73			
AV	5.1828G	103.01	Inf	-Inf	98.21	3	Vertical	46	2.43	-	31.70	6.83	33.73			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX


5180MHz_TX

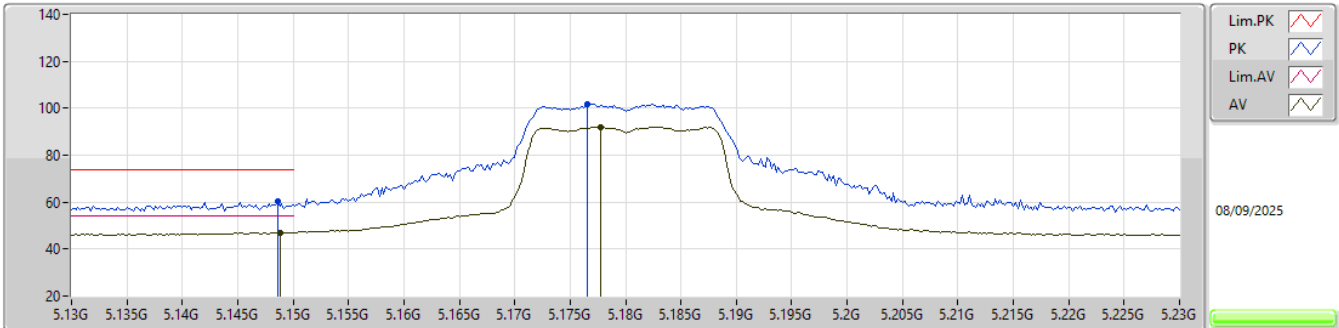
EUT_Z_1TX
Setting 17.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1486G	60.50	74.00	-13.50	55.55	3	Horizontal	181	1.89	-	31.89	6.78	33.72				
AV	5.1488G	47.08	54.00	-6.92	42.12	3	Horizontal	181	1.89	-	31.90	6.78	33.72				
PK	5.1766G	101.90	Inf	-Inf	97.07	3	Horizontal	181	1.89	-	31.74	6.82	33.73				
AV	5.1778G	92.12	Inf	-Inf	87.30	3	Horizontal	181	1.89	-	31.73	6.82	33.73				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

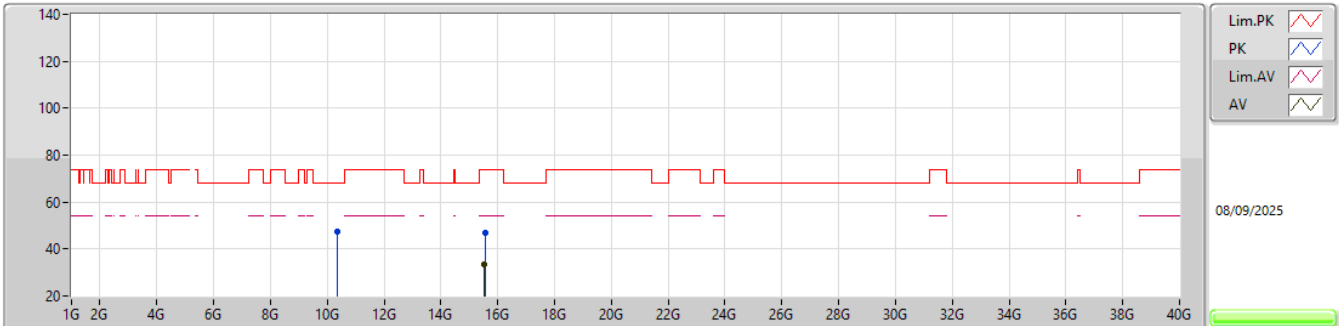


EUT_Z_1TX
Setting 20.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36585G	47.43	68.20	-20.77	64.89	3	Vertical	312	1.31	-	38.04	11.17	66.67			
PK	15.54834G	46.68	74.00	-27.32	59.29	3	Vertical	140	2.28	-	38.31	12.91	63.83			
AV	15.54399G	33.52	54.00	-20.48	46.12	3	Vertical	140	2.28	-	38.32	12.91	63.83			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

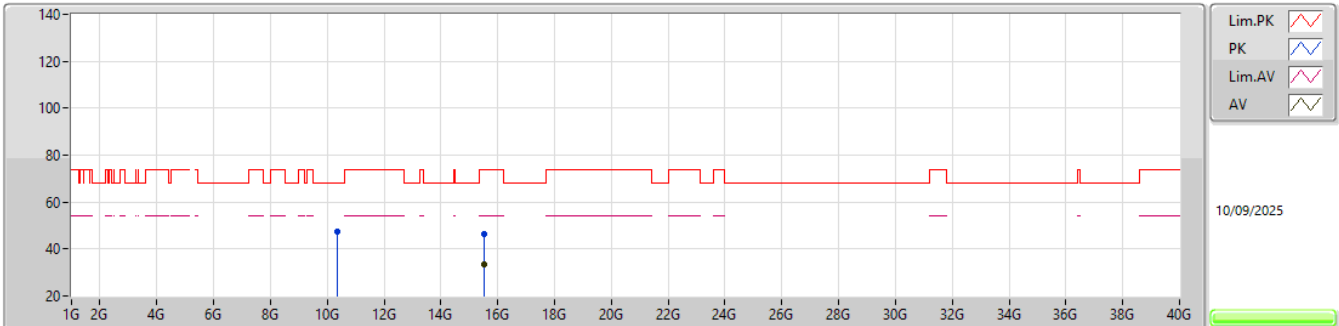


EUT_Z_1TX
Setting 20.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36837G	47.20	68.20	-21.00	64.67	3	Horizontal	56	2.06	-	38.03	11.17	66.67			
PK	15.54453G	46.21	74.00	-27.79	58.81	3	Horizontal	136	2.89	-	38.32	12.91	63.83			
AV	15.54381G	33.33	54.00	-20.67	45.93	3	Horizontal	136	2.89	-	38.32	12.91	63.83			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

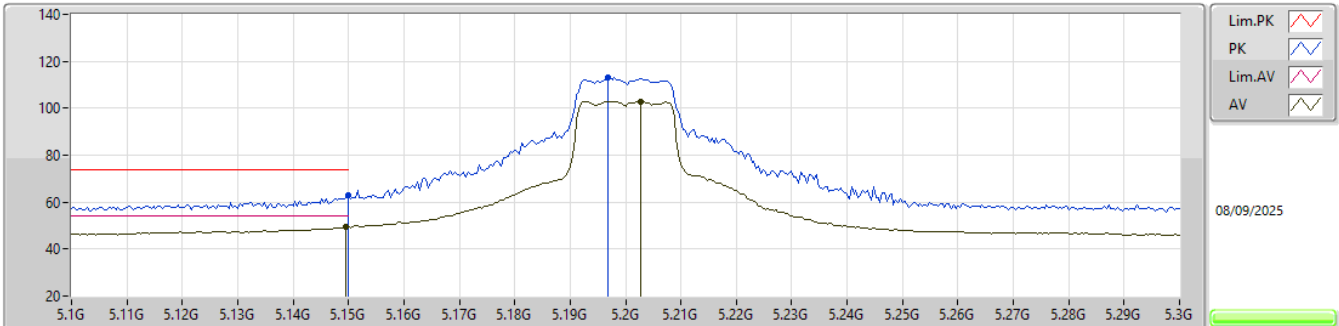


EUT_Z_1TX
Setting 19.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.15G	62.96	74.00	-11.04	58.00	3	Vertical	48	2.41	-	31.90	6.78	33.72				
AV	5.1496G	49.61	54.00	-4.39	44.65	3	Vertical	48	2.41	-	31.90	6.78	33.72				
PK	5.1968G	112.89	Inf	-Inf	108.15	3	Vertical	48	2.41	-	31.62	6.85	33.73				
AV	5.2028G	102.99	Inf	-Inf	98.29	3	Vertical	48	2.41	-	31.58	6.85	33.73				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

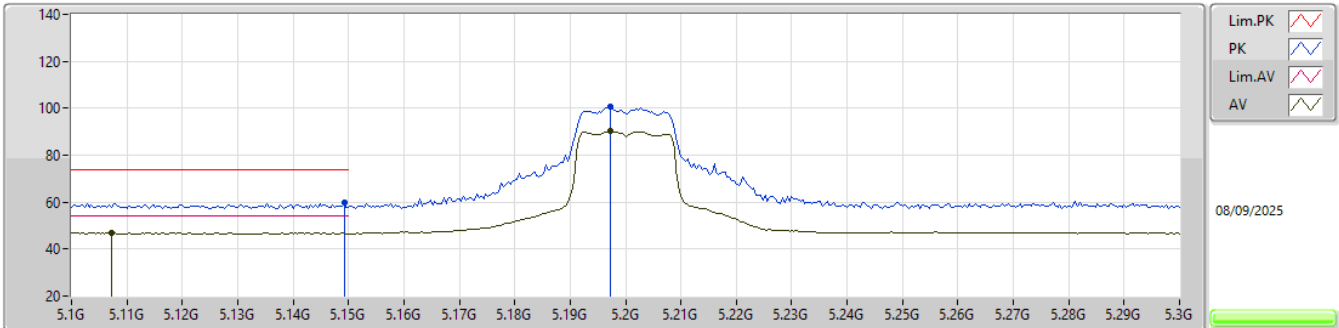


EUT_Z_1TX
Setting 19.5
03-E-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1492G	59.63	74.00	-14.37	53.17	3	Horizontal	201.7	1.53	-	33.90	7.49	34.93				
AV	5.1072G	46.96	54.00	-7.04	40.61	3	Horizontal	201.7	1.53	-	33.90	7.39	34.94				
PK	5.1972G	100.88	Inf	-Inf	94.11	3	Horizontal	201.7	1.53	-	34.09	7.60	34.92				
AV	5.1972G	90.12	Inf	-Inf	83.35	3	Horizontal	201.7	1.53	-	34.09	7.60	34.92				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX


5200MHz_TX

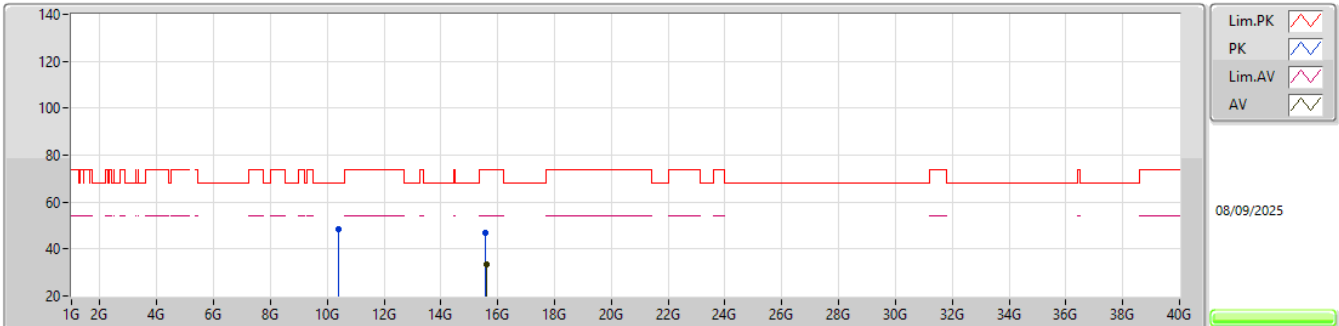
EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41404G	48.61	68.20	-19.59	64.28	3	Vertical	61	2.13	-	39.83	11.19	66.69			
PK	15.58506G	47.04	74.00	-26.96	59.28	3	Vertical	112	1.90	-	38.66	12.94	63.84			
AV	15.59172G	33.69	54.00	-20.31	45.95	3	Vertical	112	1.90	-	38.63	12.95	63.84			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

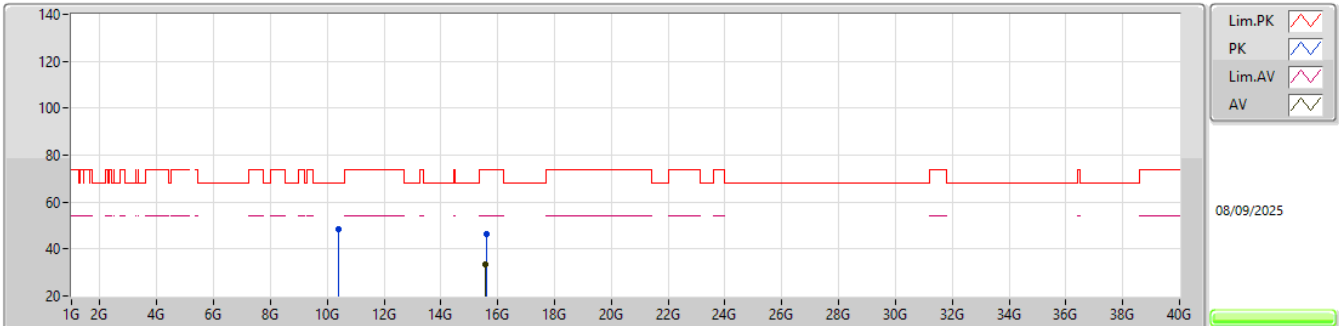


EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39094G	48.41	68.20	-19.79	64.15	3	Horizontal	336	1.52	-	39.76	11.18	66.68			
PK	15.58824G	46.54	74.00	-27.46	58.79	3	Horizontal	316	1.13	-	38.65	12.94	63.84			
AV	15.58578G	33.61	54.00	-20.39	45.85	3	Horizontal	316	1.13	-	38.66	12.94	63.84			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

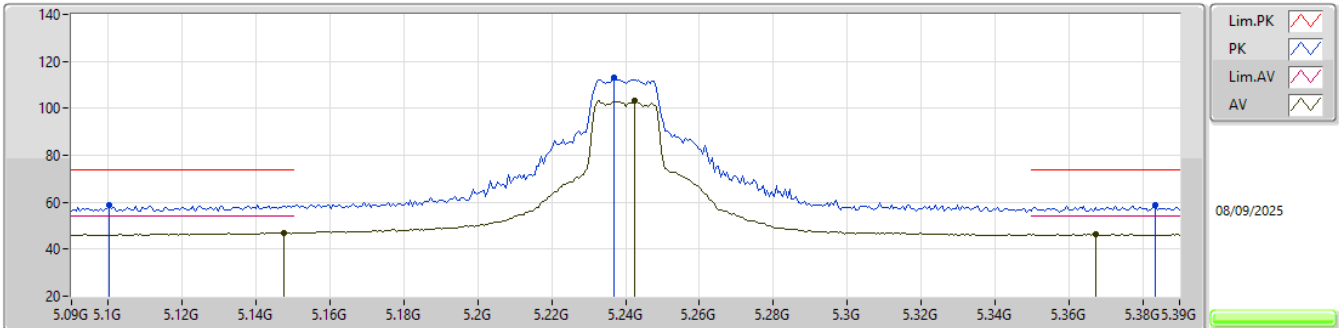


EUT_Z_1TX
Setting 19.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1002G	58.77	74.00	-15.23	54.07	3	Vertical	47	2.29	-	31.70	6.71	33.71			
AV	5.1476G	46.97	54.00	-7.03	42.03	3	Vertical	47	2.29	-	31.89	6.77	33.72			
PK	5.237G	112.95	Inf	-Inf	108.45	3	Vertical	47	2.29	-	31.38	6.86	33.74			
AV	5.2424G	103.12	Inf	-Inf	98.65	3	Vertical	47	2.29	-	31.35	6.86	33.74			
PK	5.3834G	58.56	74.00	-15.44	54.09	3	Vertical	47	2.29	-	31.37	6.88	33.78			
AV	5.3672G	46.30	54.00	-7.70	41.87	3	Vertical	47	2.29	-	31.33	6.88	33.78			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

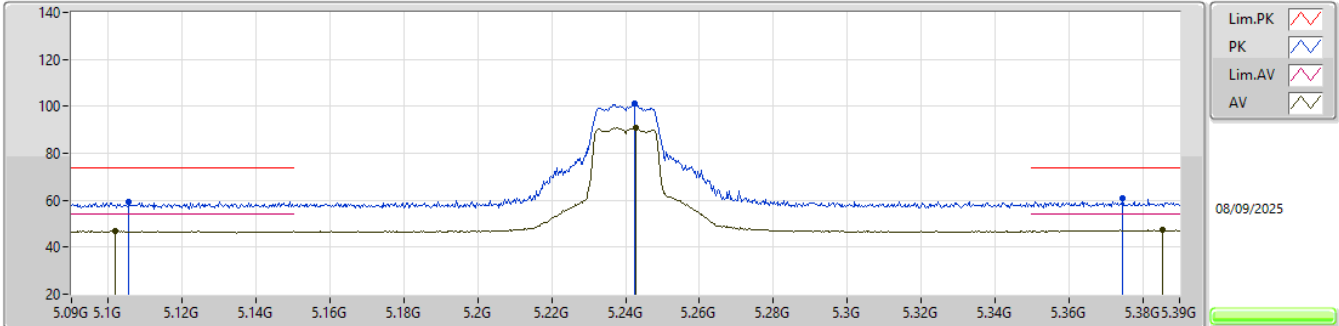


EUT_Z_1TX
Setting 19.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1056G	59.37	74.00	-14.63	53.02	3	Horizontal	200.8	1.87	-	33.90	7.39	34.94			
AV	5.1017G	46.91	54.00	-7.09	40.57	3	Horizontal	200.8	1.87	-	33.90	7.38	34.94			
PK	5.2424G	101.13	Inf	-Inf	94.28	3	Horizontal	200.8	1.87	-	34.10	7.66	34.91			
AV	5.2427G	90.80	Inf	-Inf	83.95	3	Horizontal	200.8	1.87	-	34.10	7.66	34.91			
PK	5.3747G	60.82	74.00	-13.18	53.28	3	Horizontal	200.8	1.87	-	34.60	7.83	34.89			
AV	5.3855G	47.24	54.00	-6.76	39.64	3	Horizontal	200.8	1.87	-	34.64	7.84	34.88			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

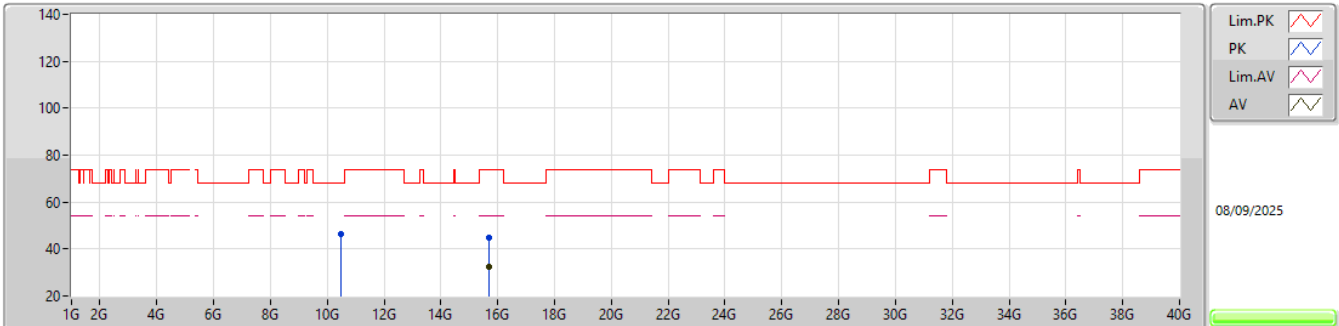


EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.46854G	46.45	68.20	-21.75	63.99	3	Vertical	23	2.38	-	37.97	11.21	66.72			
PK	15.7077G	44.72	74.00	-29.28	57.80	3	Vertical	29	1.97	-	37.77	13.04	63.89			
AV	15.71088G	32.40	54.00	-21.60	45.49	3	Vertical	29	1.97	-	37.76	13.04	63.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

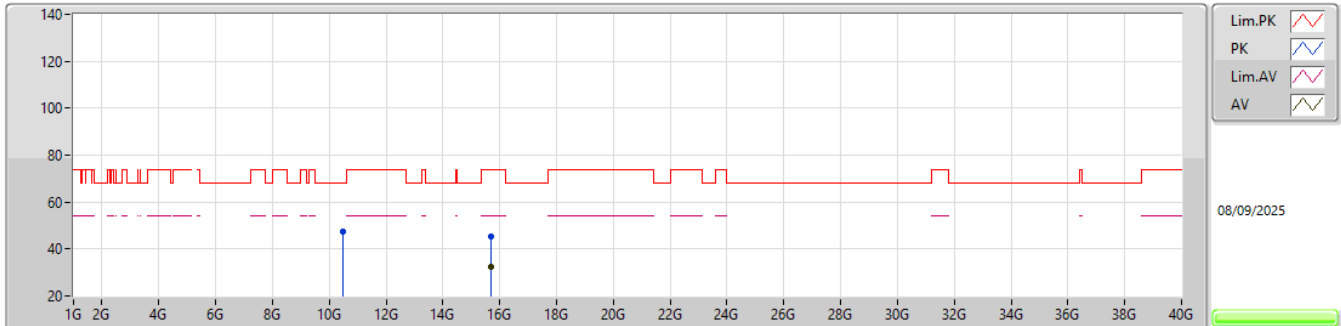


EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48948G	47.27	68.20	-20.93	64.72	3	Horizontal	260	2.50	-	38.06	11.22	66.73			
PK	15.7146G	45.27	74.00	-28.73	58.38	3	Horizontal	138	1.26	-	37.74	13.04	63.89			
AV	15.71124G	32.37	54.00	-21.63	45.46	3	Horizontal	138	1.26	-	37.76	13.04	63.89			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

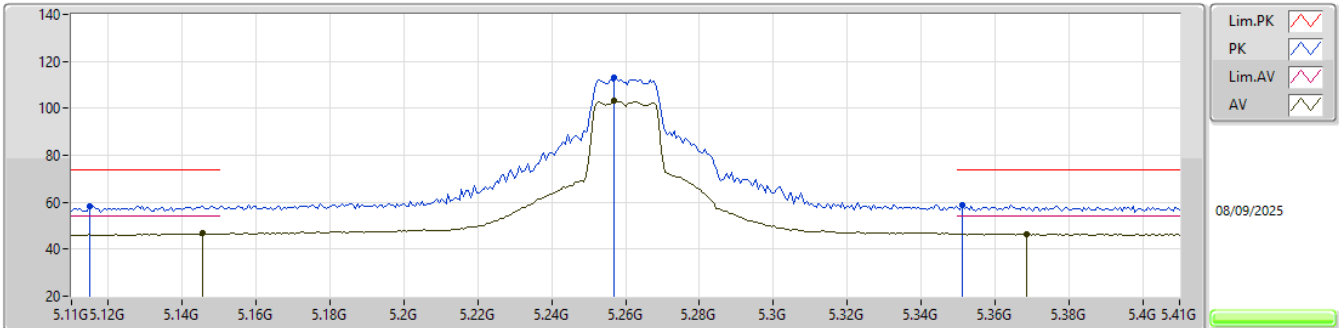


EUT_Z_1TX
Setting 19.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1148G	58.50	74.00	-15.50	53.72	3	Vertical	192	1.19	-	31.76	6.73	33.71			
AV	5.1454G	46.68	54.00	-7.32	41.75	3	Vertical	192	1.19	-	31.88	6.77	33.72			
PK	5.257G	112.96	Inf	-Inf	108.56	3	Vertical	192	1.19	-	31.29	6.86	33.75			
AV	5.257G	103.02	Inf	-Inf	98.62	3	Vertical	192	1.19	-	31.29	6.86	33.75			
PK	5.3512G	58.76	74.00	-15.24	54.36	3	Vertical	192	1.19	-	31.30	6.87	33.77			
AV	5.3686G	46.57	54.00	-7.43	42.13	3	Vertical	192	1.19	-	31.34	6.88	33.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

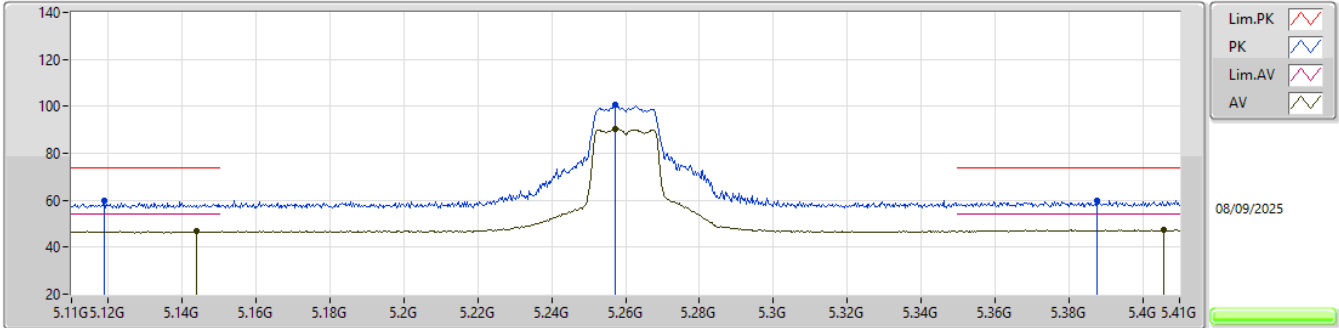


EUT_Z_1TX
Setting 19.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.119G	59.85	74.00	-14.15	53.47	3	Horizontal	198.8	1.44	-	33.90	7.42	34.94			
AV	5.1439G	46.79	54.00	-7.21	40.34	3	Horizontal	198.8	1.44	-	33.90	7.48	34.93			
PK	5.2573G	100.56	Inf	-Inf	93.65	3	Horizontal	198.8	1.44	-	34.14	7.68	34.91			
AV	5.2573G	90.46	Inf	-Inf	83.55	3	Horizontal	198.8	1.44	-	34.14	7.68	34.91			
PK	5.3875G	59.96	74.00	-14.04	52.35	3	Horizontal	198.8	1.44	-	34.65	7.84	34.88			
AV	5.4058G	47.37	54.00	-6.63	39.71	3	Horizontal	198.8	1.44	-	34.69	7.85	34.88			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

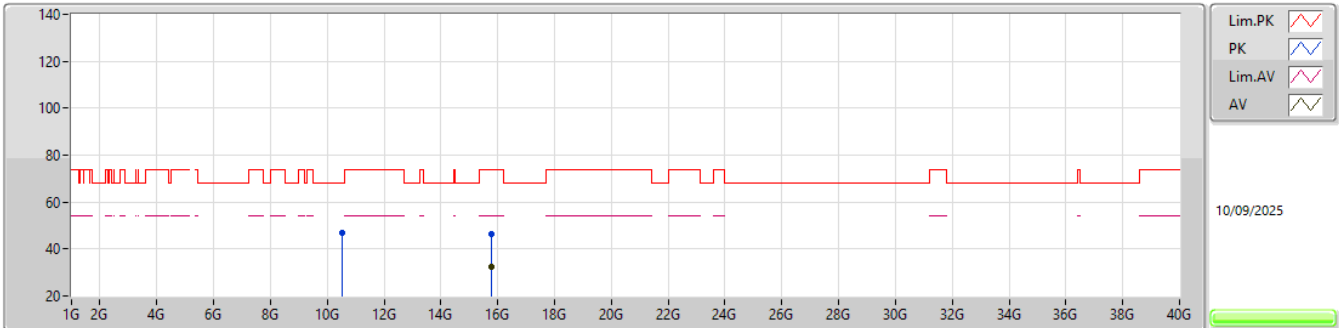


EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52561G	46.77	68.20	-21.43	64.09	3	Vertical	258	2.40	-	38.15	11.23	66.70			
PK	15.7878G	46.16	74.00	-27.84	59.46	3	Vertical	237	1.75	-	37.52	13.10	63.92			
AV	15.77781G	32.62	54.00	-21.38	45.91	3	Vertical	237	1.75	-	37.54	13.09	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

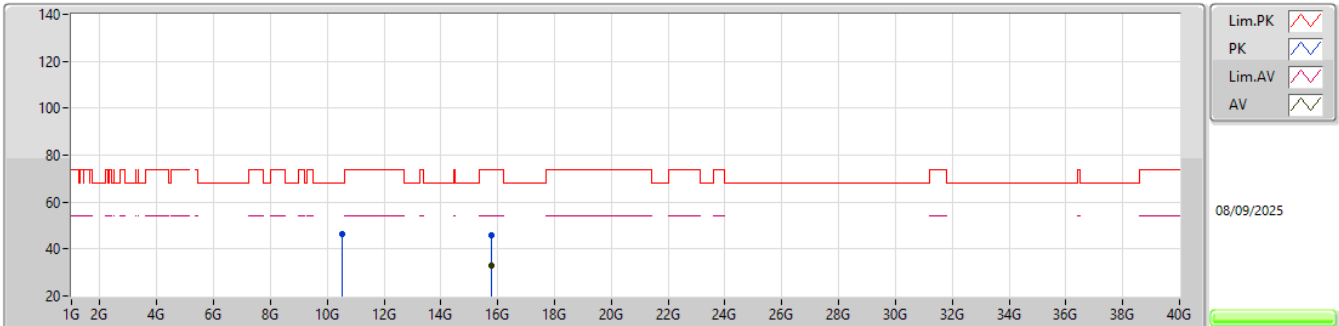


EUT_Z_1TX
Setting 19.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50863G	46.48	68.20	-21.72	63.85	3	Horizontal	253	2.84	-	38.12	11.23	66.72			
PK	15.78981G	45.80	74.00	-28.20	59.10	3	Horizontal	138	1.97	-	37.52	13.10	63.92			
AV	15.79308G	32.74	54.00	-21.26	46.04	3	Horizontal	138	1.97	-	37.51	13.11	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

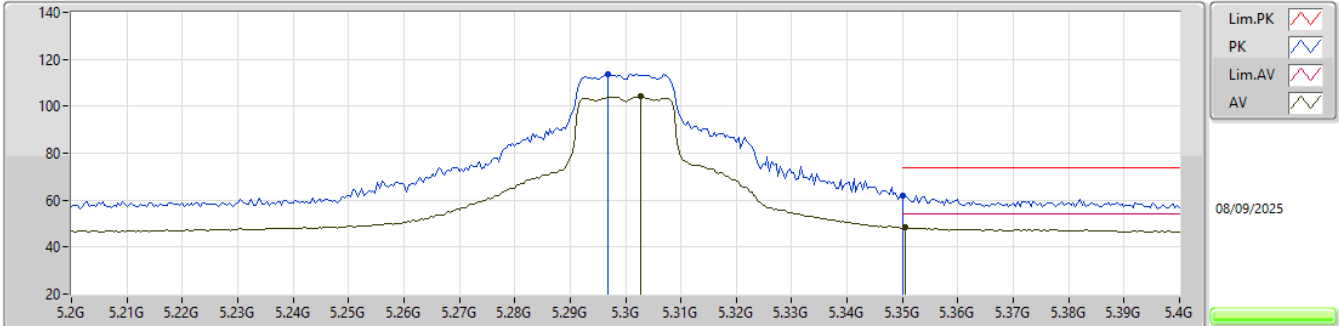


EUT_Z_1TX
Setting 20
06-E-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2968G	113.81	Inf	-Inf	109.50	3	Vertical	185	1.02	-	31.21	6.86	33.76			
AV	5.3028G	104.16	Inf	-Inf	99.84	3	Vertical	185	1.02	-	31.21	6.87	33.76			
PK	5.35G	61.93	74.00	-12.07	57.53	3	Vertical	185	1.02	-	31.30	6.87	33.77			
AV	5.3504G	48.21	54.00	-5.79	43.81	3	Vertical	185	1.02	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

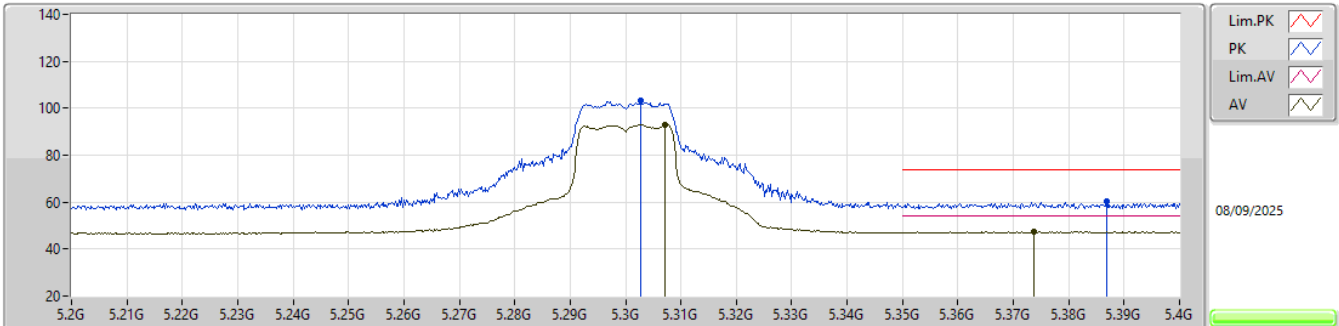


EUT_Z_1TX
Setting 20
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3028G	103.09	Inf	-Inf	95.84	3	Horizontal	210.5	1.21	-	34.41	7.74	34.90			
AV	5.3072G	92.84	Inf	-Inf	85.59	3	Horizontal	210.5	1.21	-	34.41	7.74	34.90			
PK	5.3868G	60.57	74.00	-13.43	52.96	3	Horizontal	210.5	1.21	-	34.65	7.84	34.88			
AV	5.3738G	47.42	54.00	-6.58	39.88	3	Horizontal	210.5	1.21	-	34.60	7.83	34.89			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

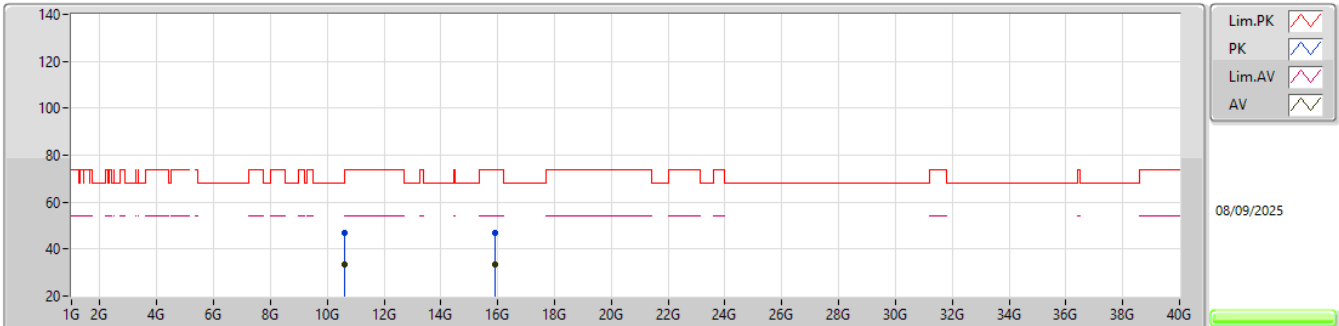


EUT_Z_1TX
Setting 20
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60531G	46.96	74.00	-27.04	64.11	3	Vertical	166	1.63	-	38.20	11.27	66.62			
AV	10.60582G	33.21	54.00	-20.79	50.36	3	Vertical	166	1.63	-	38.20	11.27	66.62			
PK	15.90855G	46.71	74.00	-27.29	59.71	3	Vertical	241	2.10	-	37.77	13.20	63.97			
AV	15.90258G	33.29	54.00	-20.71	46.27	3	Vertical	241	2.10	-	37.79	13.19	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

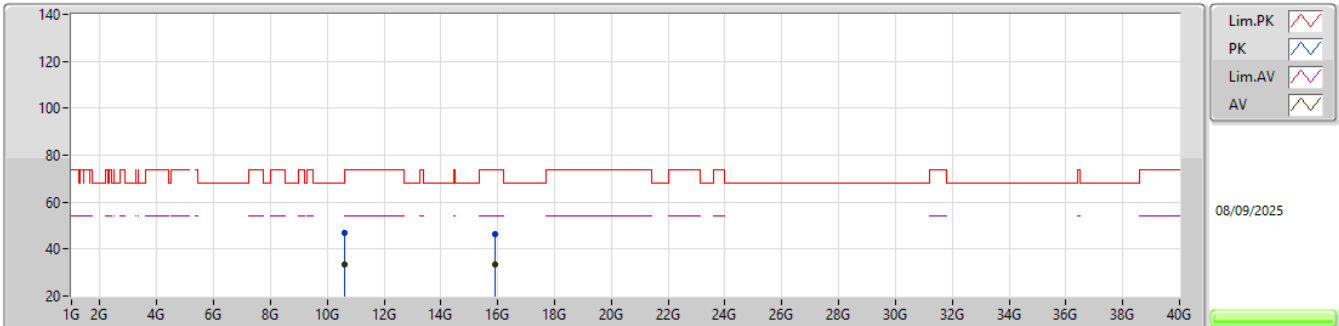


EUT_Z_1TX
Setting 20
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60168G	46.83	74.00	-27.17	63.99	3	Horizontal	209	1.09	-	38.20	11.26	66.62			
AV	10.60582G	33.19	54.00	-20.81	50.34	3	Horizontal	209	1.09	-	38.20	11.27	66.62			
PK	15.9015G	46.57	74.00	-27.43	59.55	3	Horizontal	169	2.75	-	37.79	13.19	63.96			
AV	15.89589G	33.21	54.00	-20.79	46.19	3	Horizontal	169	2.75	-	37.79	13.19	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

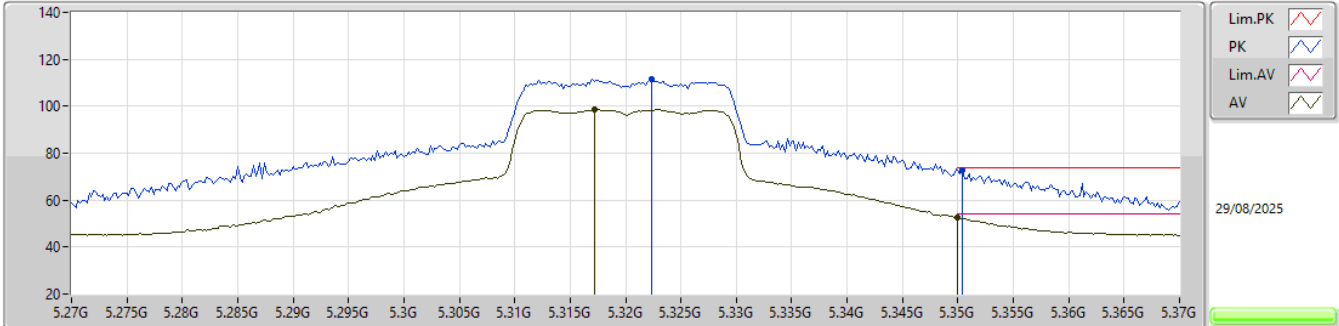


EUT_Z_1TX
Setting 14
06-E-S-2-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3224G	111.40	Inf	-Inf	107.05	3	Vertical	19	1.00	-	31.24	6.87	33.76			
AV	5.3172G	98.46	Inf	-Inf	94.12	3	Vertical	19	1.00	-	31.23	6.87	33.76			
PK	5.3504G	72.94	74.00	-1.06	68.54	3	Vertical	19	1.00	-	31.30	6.87	33.77			
AV	5.35G	52.40	54.00	-1.60	48.00	3	Vertical	19	1.00	-	31.30	6.87	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

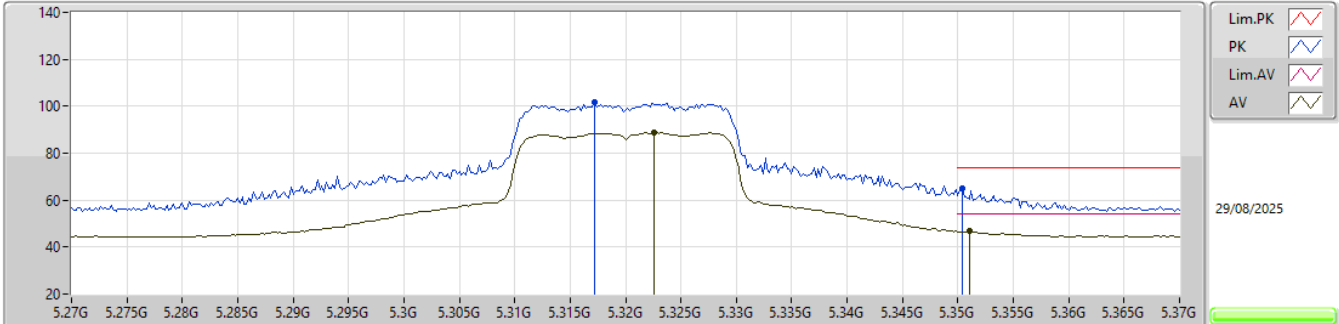


EUT_Z_1TX
Setting 14
06-E-S-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3172G	101.48	Inf	-Inf	97.14	3	Horizontal	24	2.46	-	31.23	6.87	33.76				
AV	5.3226G	88.76	Inf	-Inf	84.40	3	Horizontal	24	2.46	-	31.25	6.87	33.76				
PK	5.3504G	65.01	74.00	-8.99	60.61	3	Horizontal	24	2.46	-	31.30	6.87	33.77				
AV	5.351G	46.64	54.00	-7.36	42.24	3	Horizontal	24	2.46	-	31.30	6.87	33.77				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

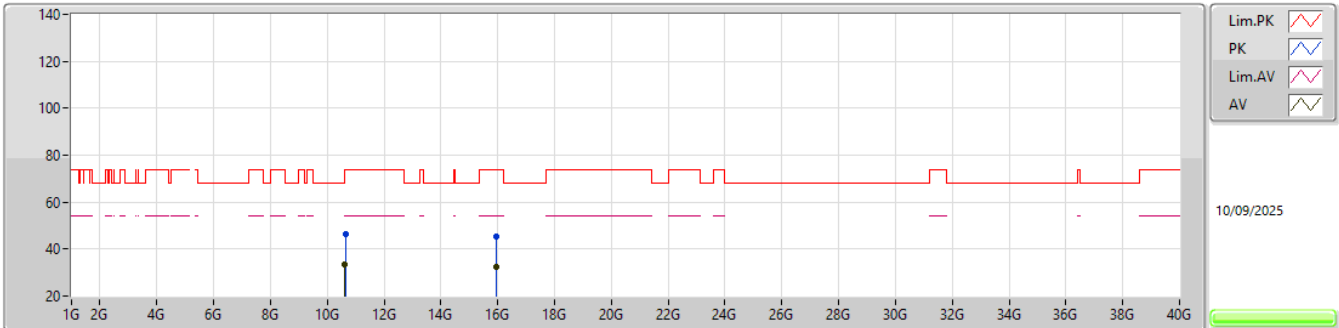


EUT_Z_1TX
Setting 20
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.63478G	46.13	74.00	-27.87	63.23	3	Vertical	342	1.88	-	38.20	11.28	66.58				
AV	10.6304G	33.22	54.00	-20.78	50.33	3	Vertical	342	1.88	-	38.20	11.28	66.59				
PK	15.95079G	45.40	74.00	-28.60	58.55	3	Vertical	248	2.62	-	37.60	13.23	63.98				
AV	15.94671G	32.28	54.00	-21.72	45.42	3	Vertical	248	2.62	-	37.61	13.23	63.98				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

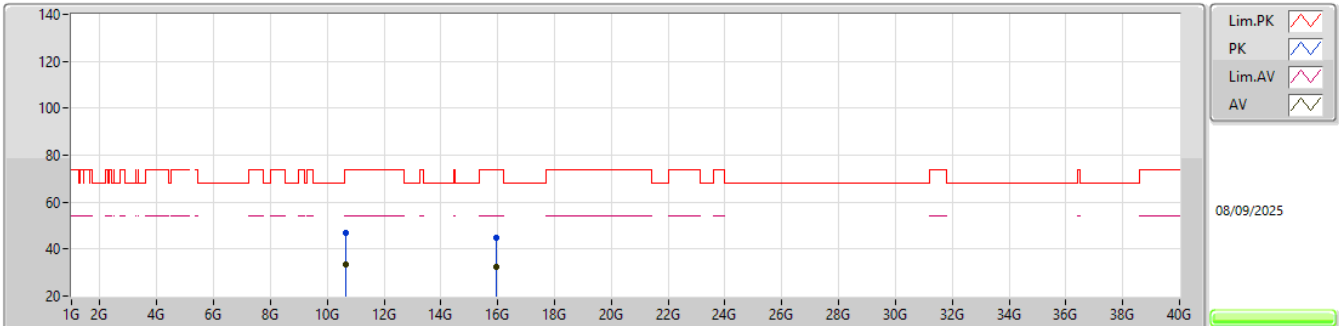


EUT_Z_1TX
Setting 20
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63469G	47.01	74.00	-26.99	64.11	3	Horizontal	7	2.51	-	38.20	11.28	66.58			
AV	10.63616G	33.29	54.00	-20.71	50.39	3	Horizontal	7	2.51	-	38.20	11.28	66.58			
PK	15.96822G	45.03	74.00	-28.97	58.25	3	Horizontal	6	1.63	-	37.53	13.24	63.99			
AV	15.945G	32.17	54.00	-21.83	45.30	3	Horizontal	6	1.63	-	37.62	13.23	63.98			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

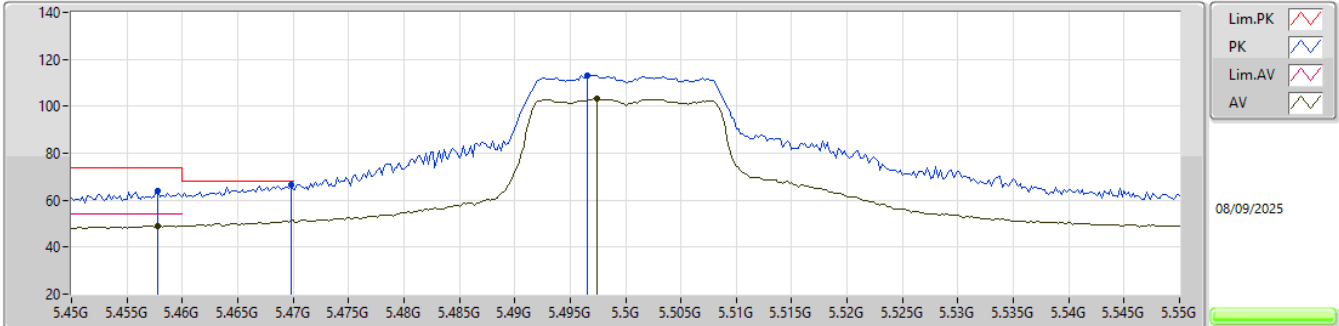


EUT_Z_1TX
Setting 17.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4578G	64.15	74.00	-9.85	59.53	3	Vertical	298	1.02	-	31.53	6.89	33.80			
AV	5.4578G	49.19	54.00	-4.81	44.57	3	Vertical	298	1.02	-	31.53	6.89	33.80			
PK	5.4698G	66.38	68.20	-1.82	61.71	3	Vertical	298	1.02	-	31.58	6.89	33.80			
PK	5.4966G	113.35	Inf	-Inf	108.58	3	Vertical	298	1.02	-	31.69	6.89	33.81			
AV	5.4974G	103.36	Inf	-Inf	98.59	3	Vertical	298	1.02	-	31.69	6.89	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

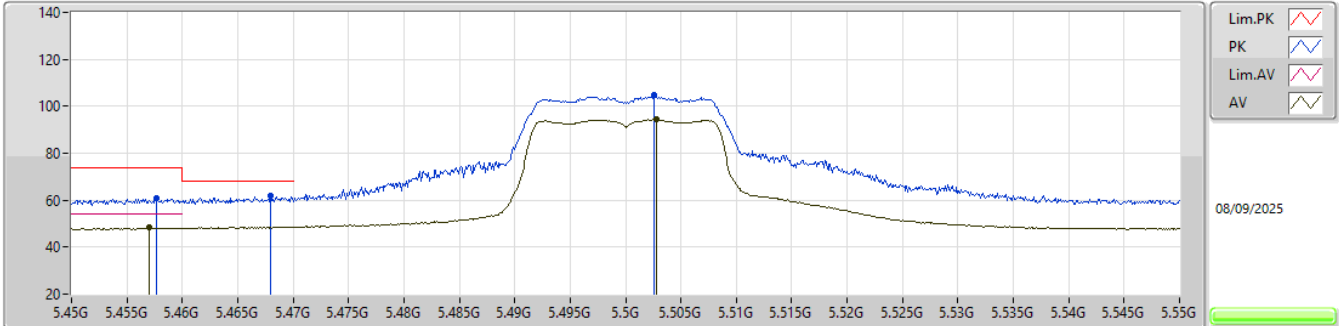


EUT_Z_1TX
Setting 17.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4577G	60.81	74.00	-13.19	53.29	3	Horizontal	257.7	1.00	-	34.60	7.79	34.87			
AV	5.457G	48.23	54.00	-5.77	40.71	3	Horizontal	257.7	1.00	-	34.60	7.79	34.87			
PK	5.468G	61.70	68.20	-6.50	54.19	3	Horizontal	257.7	1.00	-	34.60	7.78	34.87			
PK	5.5026G	104.62	Inf	-Inf	97.16	3	Horizontal	257.7	1.00	-	34.59	7.73	34.86			
AV	5.5028G	94.29	Inf	-Inf	86.83	3	Horizontal	257.7	1.00	-	34.59	7.73	34.86			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

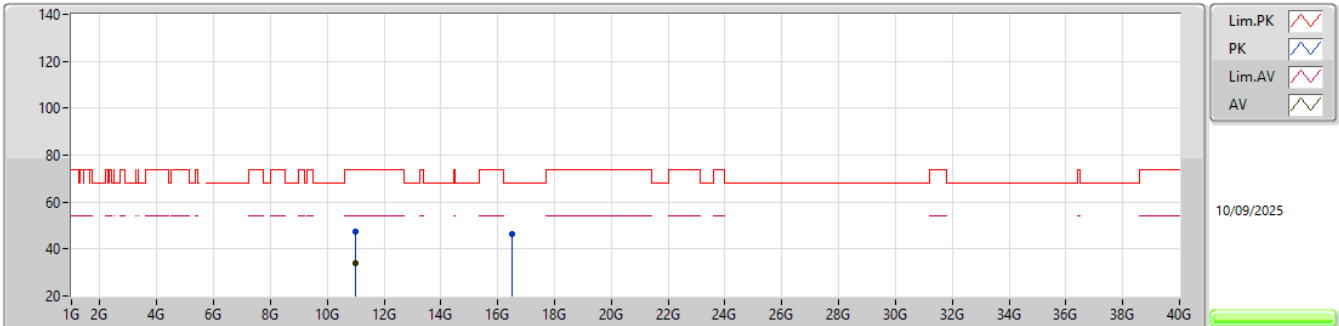


EUT_Z_1TX
Setting 18.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.98578G	47.35	74.00	-26.65	63.84	3	Vertical	10	1.64	-	38.30	11.42	66.21			
AV	10.99055G	33.79	54.00	-20.21	50.27	3	Vertical	10	1.64	-	38.30	11.42	66.20			
PK	16.50591G	46.25	68.20	-21.95	58.44	3	Vertical	216	1.08	-	38.04	13.52	63.75			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

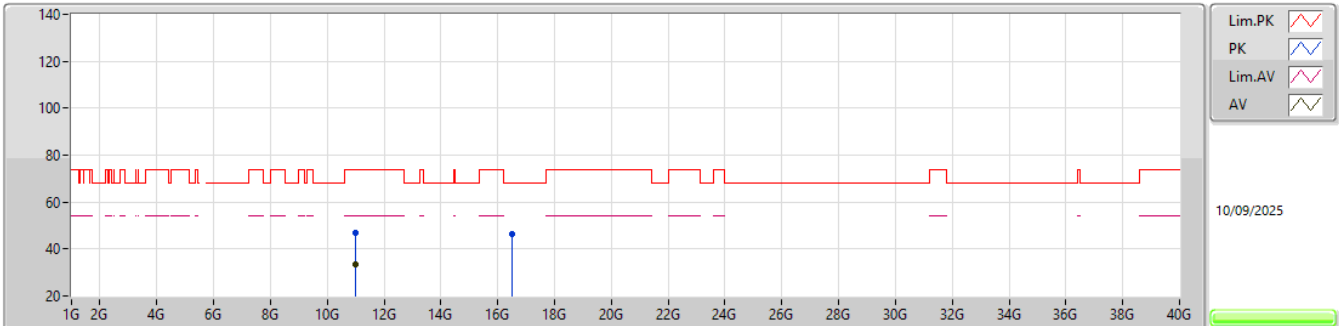


EUT_Z_1TX
Setting 18.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.98695G	47.04	74.00	-26.96	63.52	3	Horizontal	8	2.80	-	38.30	11.42	66.20			
AV	10.99268G	33.64	54.00	-20.36	50.12	3	Horizontal	8	2.80	-	38.30	11.42	66.20			
PK	16.50387G	46.26	68.20	-21.94	58.46	3	Horizontal	295	1.87	-	38.02	13.52	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

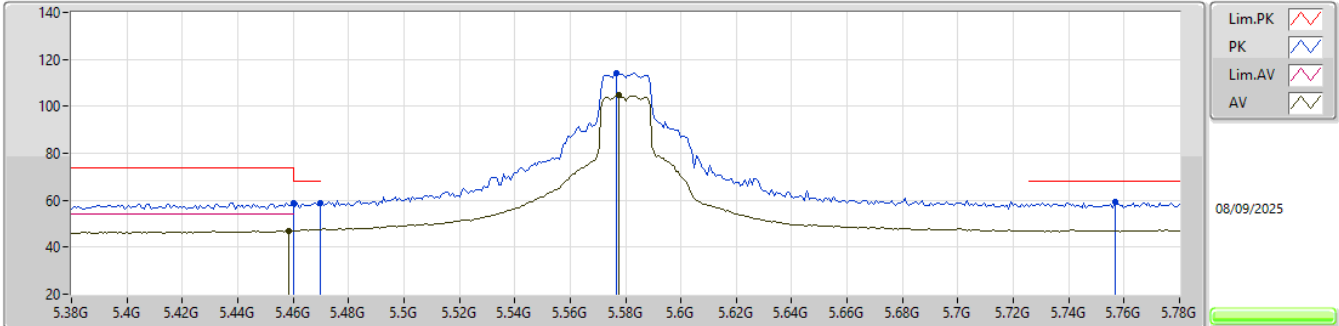EUT_Z_1TX
Setting 21
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	58.78	74.00	-15.22	54.15	3	Vertical	87	2.53	-	31.54	6.89	33.80			
AV	5.4584G	47.00	54.00	-7.00	42.38	3	Vertical	87	2.53	-	31.53	6.89	33.80			
PK	5.4696G	59.01	68.20	-9.19	54.34	3	Vertical	87	2.53	-	31.58	6.89	33.80			
PK	5.5768G	114.20	Inf	-Inf	109.44	3	Vertical	87	2.53	-	31.65	6.91	33.80			
AV	5.5776G	104.57	Inf	-Inf	99.82	3	Vertical	87	2.53	-	31.64	6.91	33.80			
PK	5.7568G	59.42	68.20	-8.78	54.08	3	Vertical	87	2.53	-	32.00	7.12	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

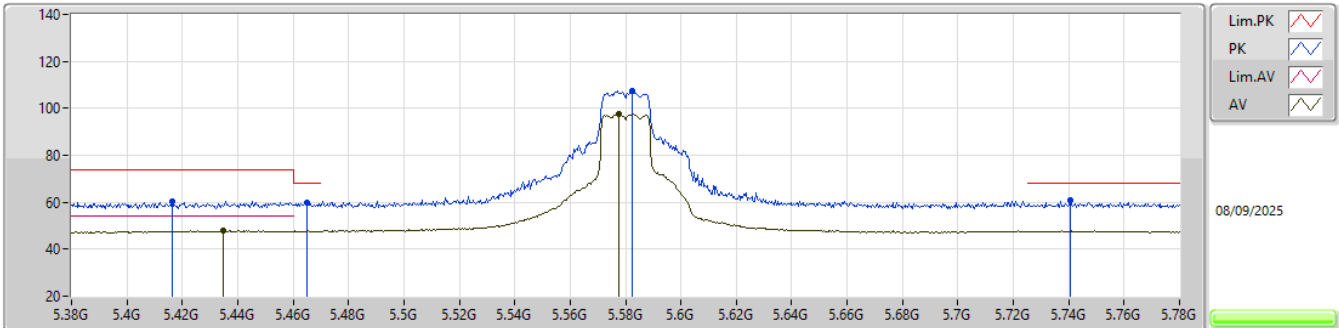EUT_Z_1TX
Setting 21
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4164G	60.30	74.00	-13.70	52.67	3	Horizontal	206.7	1.00	-	34.67	7.84	34.88
AV	5.4348G	47.92	54.00	-6.08	40.34	3	Horizontal	206.7	1.00	-	34.63	7.82	34.87
PK	5.4648G	59.88	68.20	-8.32	52.37	3	Horizontal	206.7	1.00	-	34.60	7.78	34.87
PK	5.5824G	107.67	Inf	-Inf	100.55	3	Horizontal	206.7	1.00	-	34.37	7.63	34.88
AV	5.5776G	97.65	Inf	-Inf	90.50	3	Horizontal	206.7	1.00	-	34.39	7.64	34.88
PK	5.7404G	60.75	68.20	-7.45	53.62	3	Horizontal	206.7	1.00	-	34.20	7.86	34.93

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

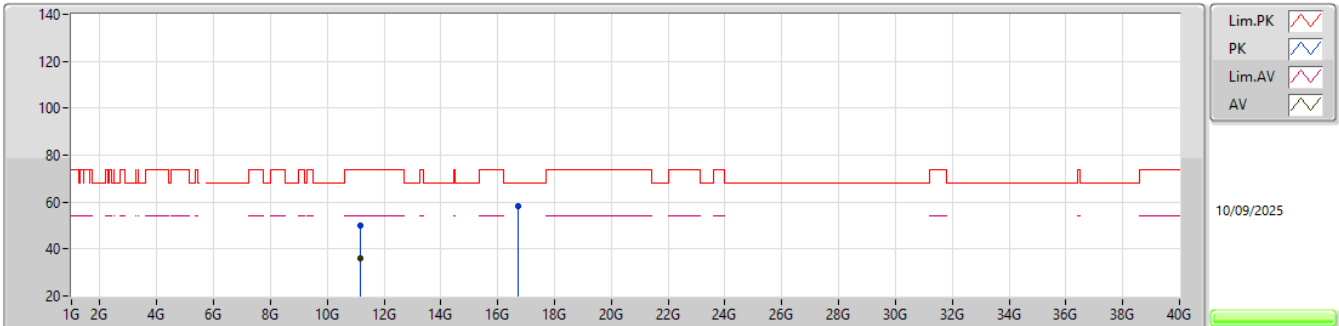


EUT_Z_1TX
Setting 21
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16318G	49.94	74.00	-24.06	66.21	3	Vertical	0	2.75	-	38.43	11.49	66.19			
AV	11.16024G	36.26	54.00	-17.74	52.54	3	Vertical	0	2.75	-	38.42	11.49	66.19			
PK	16.73673G	58.04	68.20	-10.16	69.61	3	Vertical	71	2.61	-	38.80	13.63	64.00			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

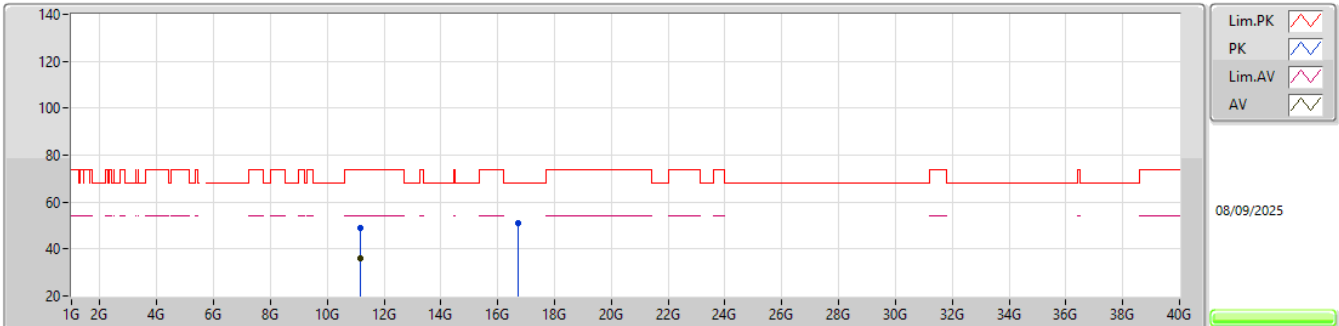EUT_Z_1TX
Setting 21
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16396G	48.71	74.00	-25.29	64.98	3	Horizontal	65	2.41	-	38.43	11.49	66.19			
AV	11.15973G	35.96	54.00	-18.04	52.24	3	Horizontal	65	2.41	-	38.42	11.49	66.19			
PK	16.73631G	50.86	68.20	-17.34	62.43	3	Horizontal	109	2.12	-	38.80	13.63	64.00			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

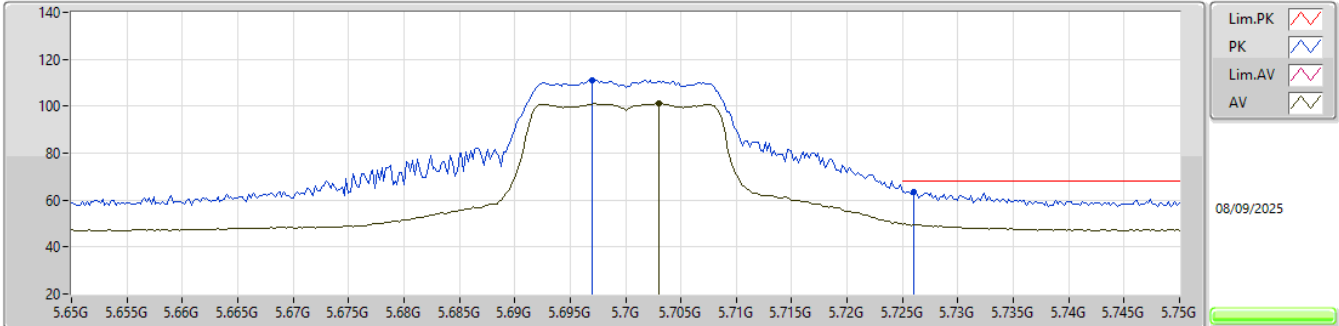


EUT_Z_1TX
Setting 17
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.697G	111.17	Inf	-Inf	105.94	3	Vertical	64	2.31	-	31.98	7.04	33.79				
AV	5.703G	101.02	Inf	-Inf	95.76	3	Vertical	64	2.31	-	32.00	7.05	33.79				
PK	5.726G	63.62	68.20	-4.58	58.32	3	Vertical	64	2.31	-	32.00	7.08	33.78				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

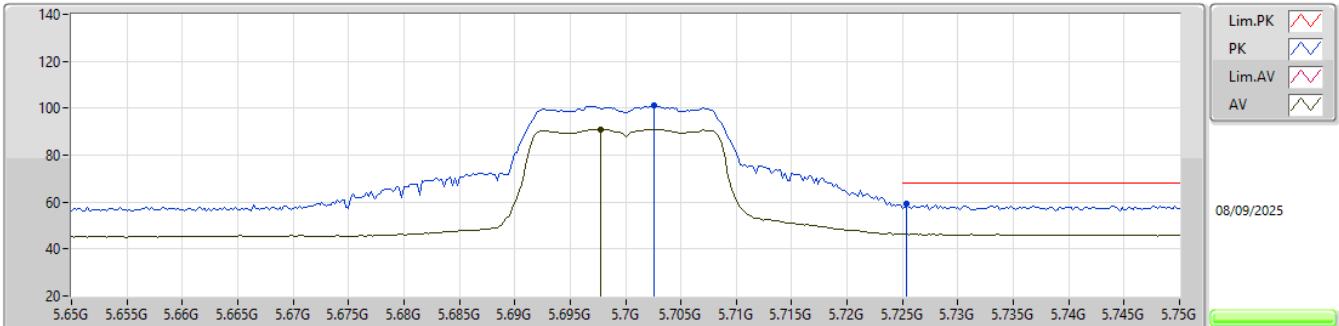


EUT_Z_1TX
Setting 17
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7026G	101.11	Inf	-Inf	95.85	3	Horizontal	204.1	1.02	-	32.00	7.05	33.79			
AV	5.6978G	91.08	Inf	-Inf	85.84	3	Horizontal	204.1	1.02	-	31.99	7.04	33.79			
PK	5.7254G	59.49	68.20	-8.71	54.19	3	Horizontal	204.1	1.02	-	32.00	7.08	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

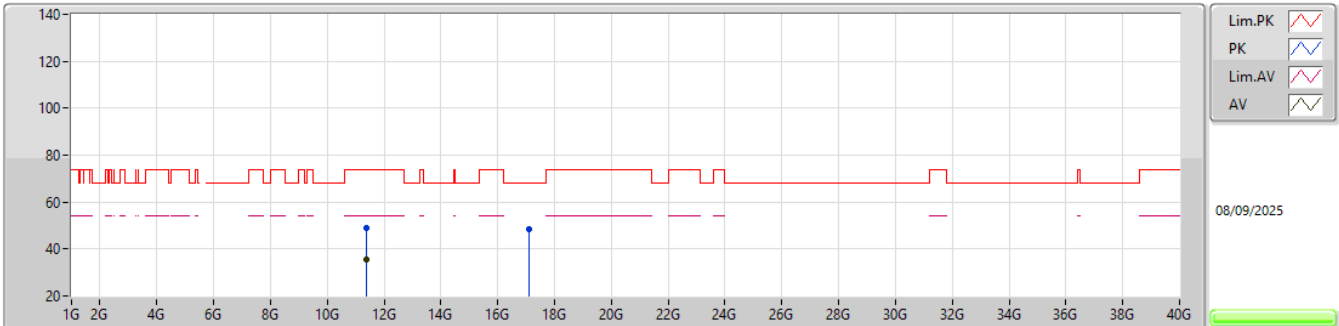EUT_Z_1TX
Setting 17
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40126G	49.08	74.00	-24.92	63.89	3	Vertical	47	1.24	-	39.80	11.59	66.20			
AV	11.39976G	35.60	54.00	-18.40	50.41	3	Vertical	47	1.24	-	39.80	11.59	66.20			
PK	17.10738G	48.53	68.20	-19.67	58.69	3	Vertical	302	1.85	-	40.31	13.81	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

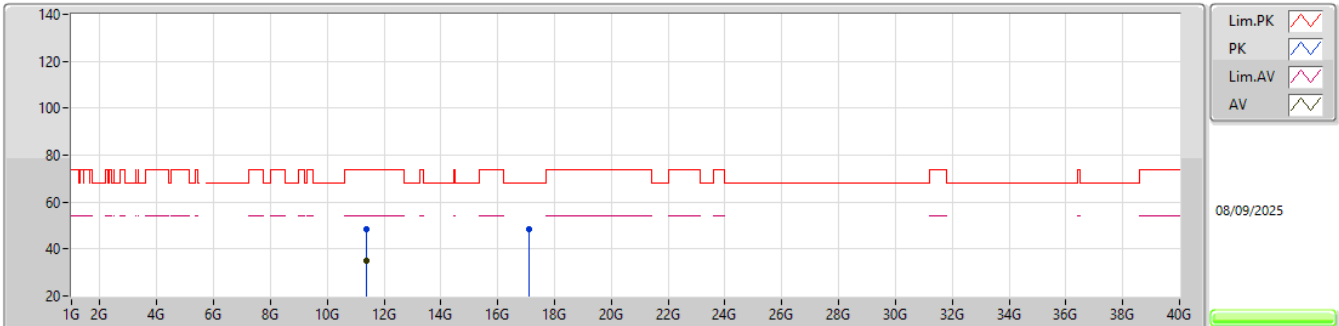EUT_Z_1TX
Setting 17
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39628G	48.29	74.00	-25.71	63.10	3	Horizontal	236	2.37	-	39.80	11.59	66.20			
AV	11.39982G	35.21	54.00	-18.79	50.02	3	Horizontal	236	2.37	-	39.80	11.59	66.20			
PK	17.10108G	48.27	68.20	-19.93	58.44	3	Horizontal	288	1.01	-	40.30	13.81	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

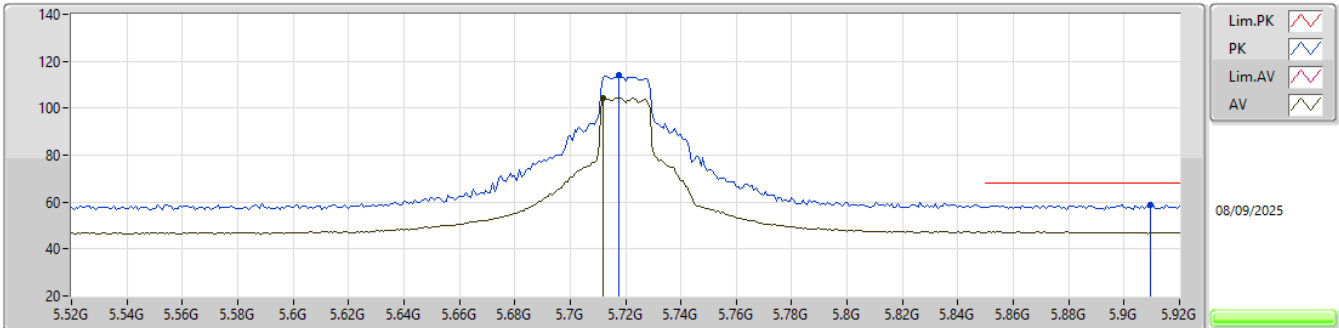


EUT_Z_1TX
Setting 22.5
06-E-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7176G	114.01	Inf	-Inf	108.72	3	Vertical	87	2.33	-	32.00	7.07	33.78				
AV	5.712G	104.29	Inf	-Inf	99.01	3	Vertical	87	2.33	-	32.00	7.06	33.78				
PK	5.9096G	58.94	68.20	-9.26	53.22	3	Vertical	87	2.33	-	32.22	7.26	33.76				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

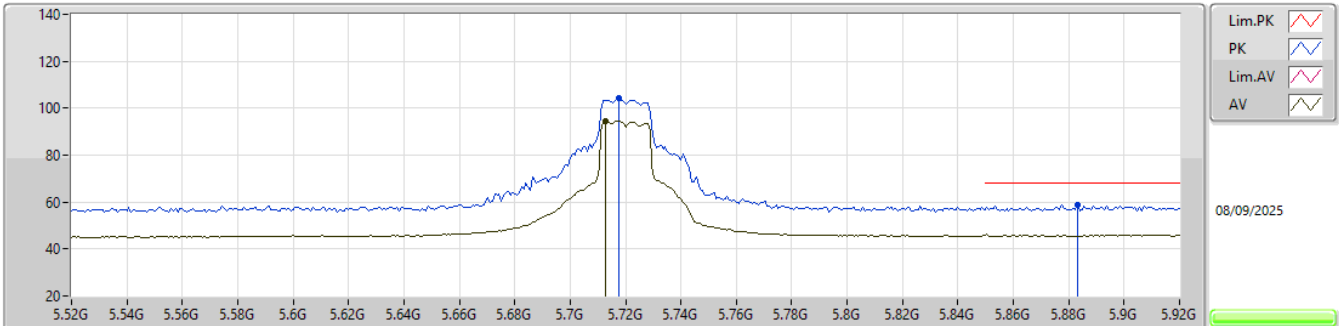


EUT_Z_1TX
Setting 22.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7176G	104.15	Inf	-Inf	98.86	3	Horizontal	258.1	1.04	-	32.00	7.07	33.78			
AV	5.7128G	94.49	Inf	-Inf	89.21	3	Horizontal	258.1	1.04	-	32.00	7.06	33.78			
PK	5.8832G	58.69	68.20	-9.51	53.04	3	Horizontal	258.1	1.04	-	32.17	7.24	33.76			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

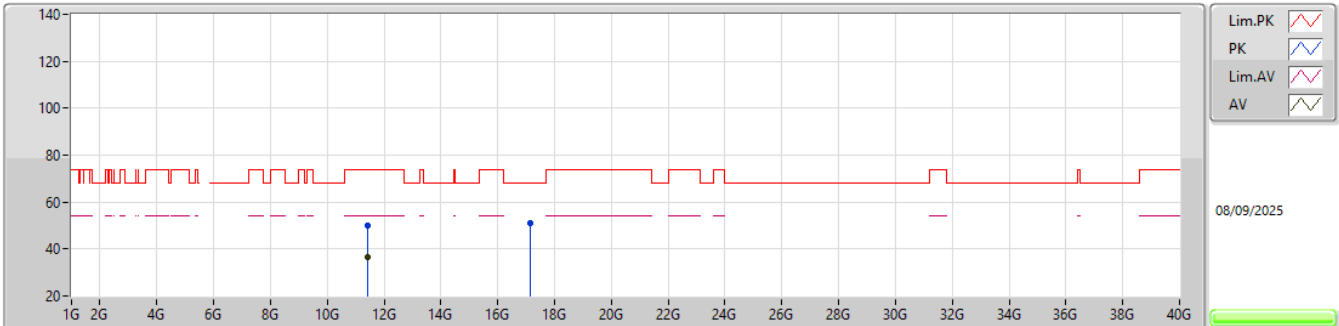


EUT_Z_1TX
Setting 22.5
03-G-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.4424G	49.83	74.00	-24.17	65.65	3	Vertical	336	1.02	-	38.78	11.60	66.20			
AV	11.4406G	36.73	54.00	-17.27	52.55	3	Vertical	336	1.02	-	38.78	11.60	66.20			
PK	17.15544G	50.81	68.20	-17.39	60.93	3	Vertical	307	2.74	-	40.32	13.84	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

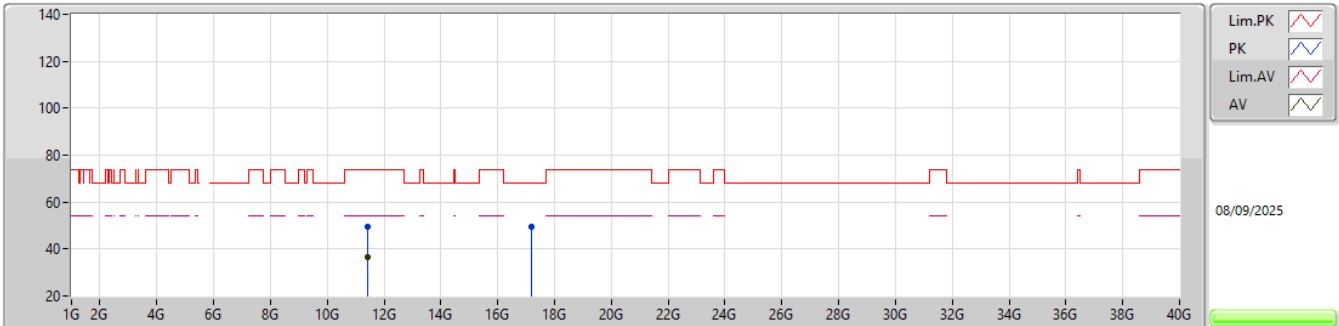EUT_Z_1TX
Setting 22.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43772G	49.38	74.00	-24.62	65.20	3	Horizontal	360	2.74	-	38.78	11.60	66.20			
AV	11.43952G	36.30	54.00	-17.70	52.12	3	Horizontal	360	2.74	-	38.78	11.60	66.20			
PK	17.17482G	49.44	68.20	-18.76	59.47	3	Horizontal	279	3.00	-	40.40	13.85	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

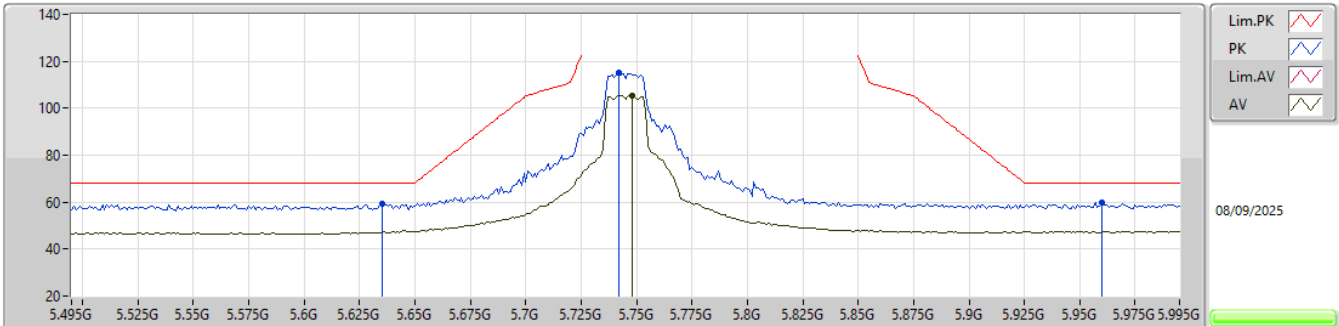


EUT_Z_1TX
Setting 22.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.635G	59.29	68.20	-8.91	54.45	3	Vertical	58	1.08	-	31.67	6.96	33.79			
PK	5.742G	115.15	Inf	-Inf	109.83	3	Vertical	58	1.08	-	32.00	7.10	33.78			
AV	5.748G	105.60	Inf	-Inf	100.27	3	Vertical	58	1.08	-	32.00	7.11	33.78			
PK	5.96G	59.76	68.20	-8.44	53.90	3	Vertical	58	1.08	-	32.32	7.29	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

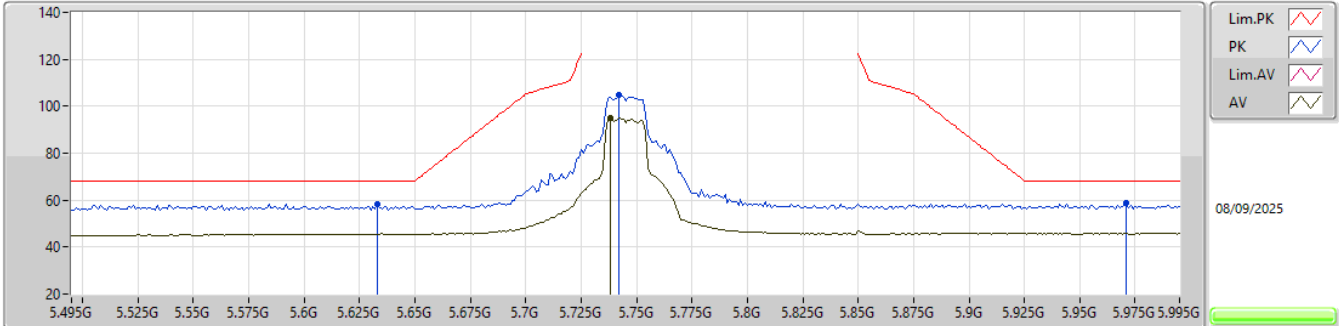


EUT_Z_1TX
Setting 22.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.633G	58.40	68.20	-9.80	53.57	3	Horizontal	204.9	1.16	-	31.67	6.95	33.79			
PK	5.742G	104.90	Inf	-Inf	99.58	3	Horizontal	204.9	1.16	-	32.00	7.10	33.78			
AV	5.738G	94.92	Inf	-Inf	89.60	3	Horizontal	204.9	1.16	-	32.00	7.10	33.78			
PK	5.971G	58.88	68.20	-9.32	52.99	3	Horizontal	204.9	1.16	-	32.34	7.30	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

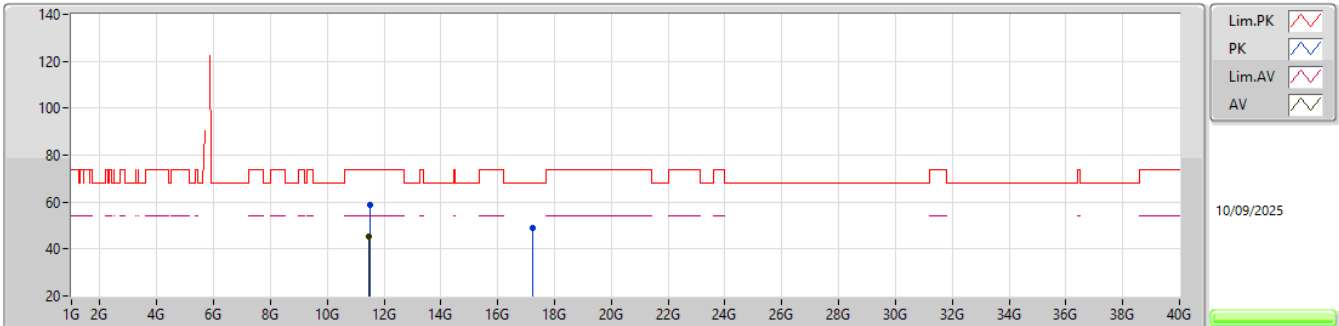


EUT_Z_1TX
Setting 22.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4921G	59.04	74.00	-14.96	74.74	3	Vertical	296	1.81	-	38.88	11.62	66.20			
AV	11.48034G	45.52	54.00	-8.48	61.24	3	Vertical	296	1.81	-	38.86	11.62	66.20			
PK	17.24274G	48.91	68.20	-19.29	58.55	3	Vertical	229	1.65	-	40.76	13.88	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

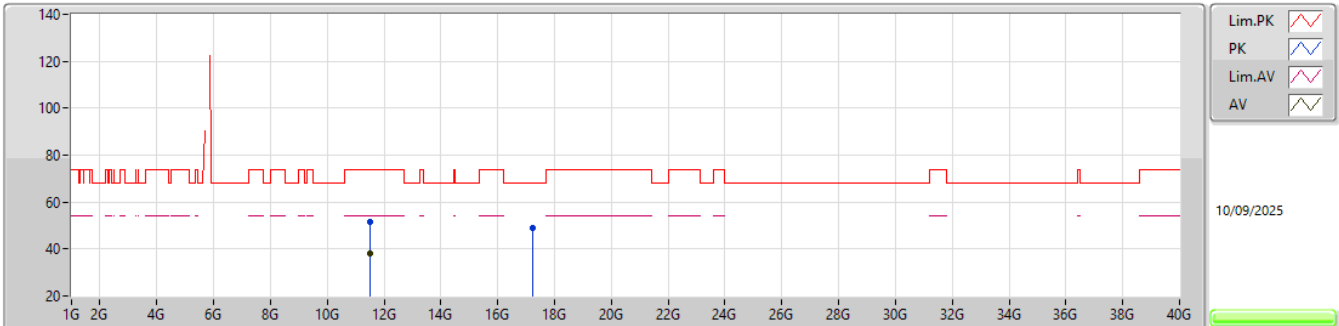


EUT_Z_1TX
Setting 22.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48904G	51.31	74.00	-22.69	67.01	3	Horizontal	332	1.01	-	38.88	11.62	66.20			
AV	11.49102G	38.35	54.00	-15.65	54.05	3	Horizontal	332	1.01	-	38.88	11.62	66.20			
PK	17.23728G	49.12	68.20	-19.08	58.80	3	Horizontal	360	2.88	-	40.72	13.88	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

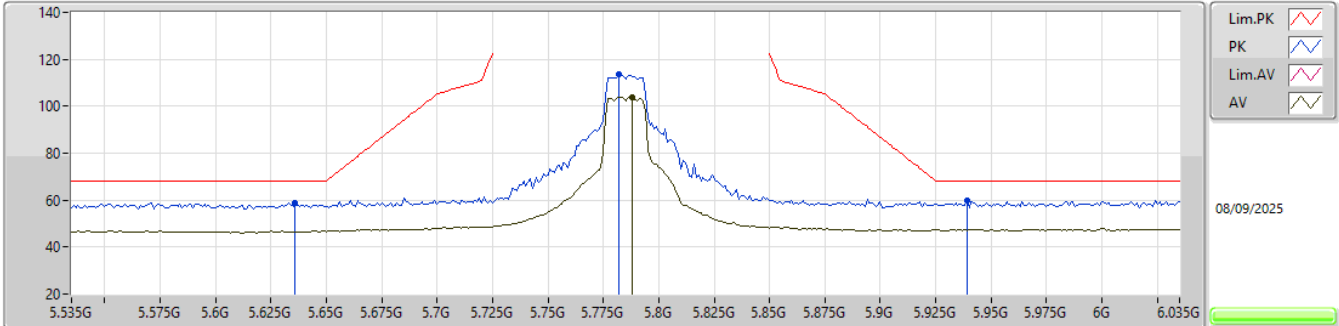


EUT_Z_1TX
Setting 21.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.636G	58.66	68.20	-9.54	53.82	3	Vertical	61	2.24	-	31.67	6.96	33.79			
PK	5.782G	113.60	Inf	-Inf	108.22	3	Vertical	61	2.24	-	32.00	7.16	33.78			
AV	5.788G	103.85	Inf	-Inf	98.47	3	Vertical	61	2.24	-	32.00	7.16	33.78			
PK	5.939G	59.78	68.20	-8.42	53.98	3	Vertical	61	2.24	-	32.28	7.28	33.76			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

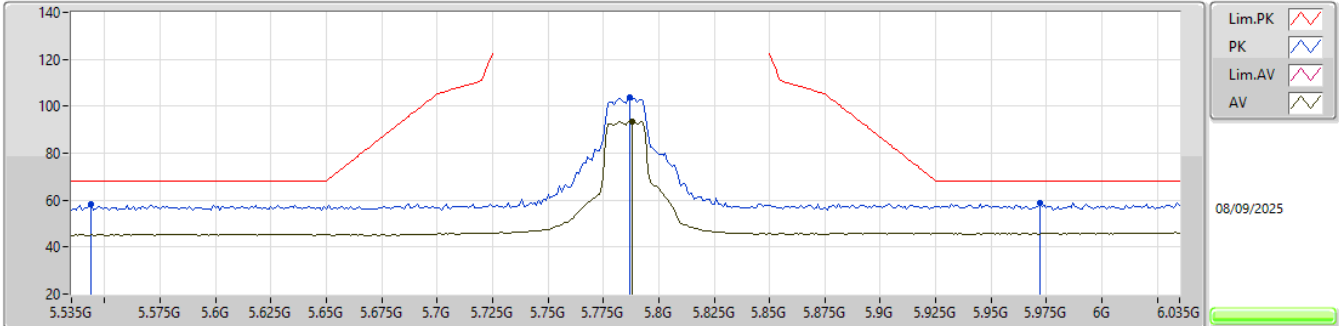


EUT_Z_1TX
Setting 21.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.544G	58.40	68.20	-9.80	53.60	3	Horizontal	80.9	1.18	-	31.70	6.90	33.80			
PK	5.787G	103.80	Inf	-Inf	98.42	3	Horizontal	80.9	1.18	-	32.00	7.16	33.78			
AV	5.788G	93.39	Inf	-Inf	88.01	3	Horizontal	80.9	1.18	-	32.00	7.16	33.78			
PK	5.972G	58.76	68.20	-9.44	52.87	3	Horizontal	80.9	1.18	-	32.34	7.30	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

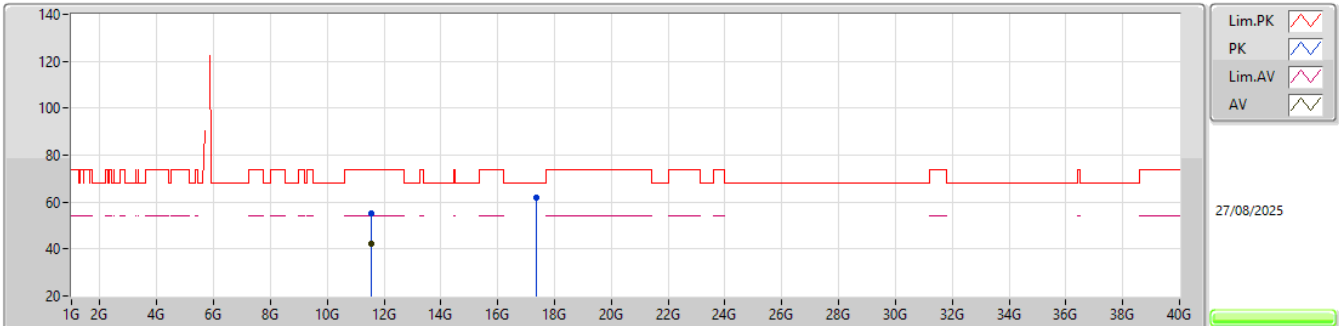


EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57192G	55.29	74.00	-18.71	70.02	3	Vertical	158	1.69	-	39.61	11.80	66.14			
AV	11.56964G	41.99	54.00	-12.01	56.71	3	Vertical	158	1.69	-	39.62	11.80	66.14			
PK	17.35398G	61.75	68.20	-6.45	70.71	3	Vertical	123	2.54	-	41.43	13.88	64.27			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5785MHz_TX

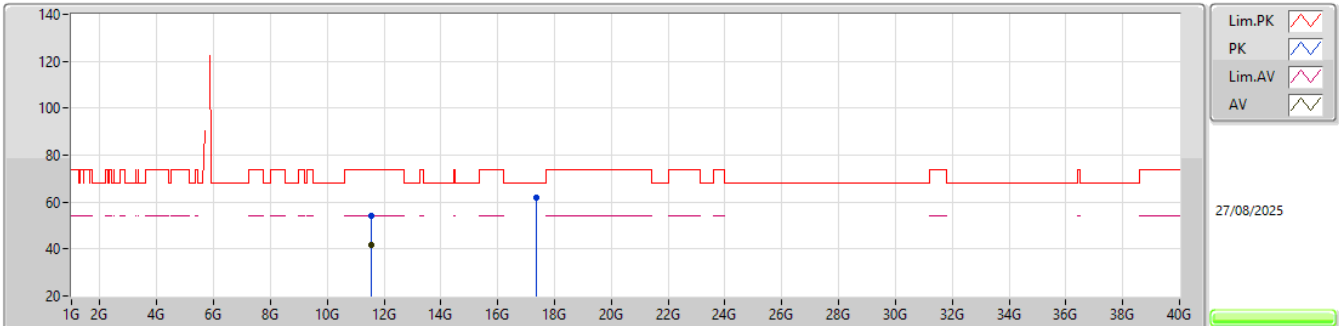
EUT_Z_1TX
Setting 21.5
06-E-S-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57136G	54.37	74.00	-19.63	69.10	3	Horizontal	142	2.39	-	39.61	11.80	66.14			
AV	11.56742G	41.76	54.00	-12.24	56.47	3	Horizontal	142	2.39	-	39.63	11.80	66.14			
PK	17.35626G	61.79	68.20	-6.41	70.73	3	Horizontal	253	2.29	-	41.45	13.88	64.27			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

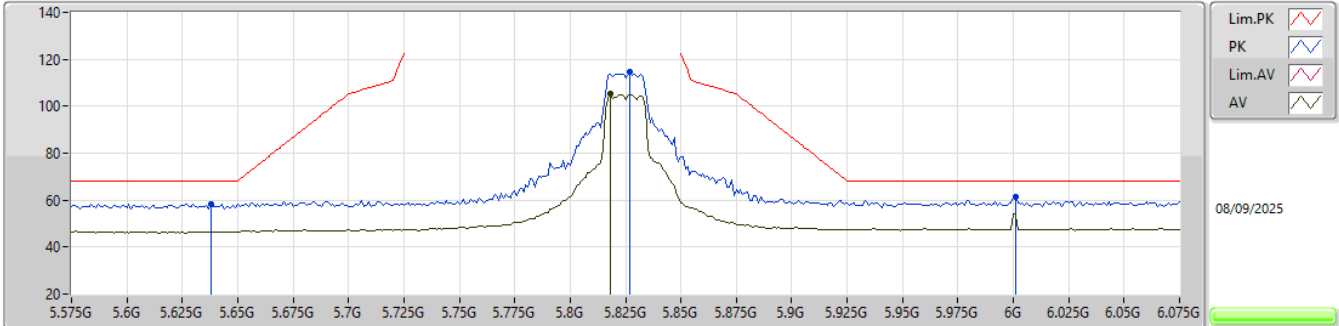


EUT_Z_1TX
Setting 22
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.638G	58.43	68.20	-9.77	53.58	3	Vertical	58	1.11	-	31.68	6.96	33.79				
PK	5.827G	114.46	Inf	-Inf	108.98	3	Vertical	58	1.11	-	32.05	7.20	33.77				
AV	5.818G	105.15	Inf	-Inf	99.69	3	Vertical	58	1.11	-	32.04	7.19	33.77				
PK	6.001G	61.62	68.20	-6.58	55.65	3	Vertical	58	1.11	-	32.40	7.32	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5825MHz_TX

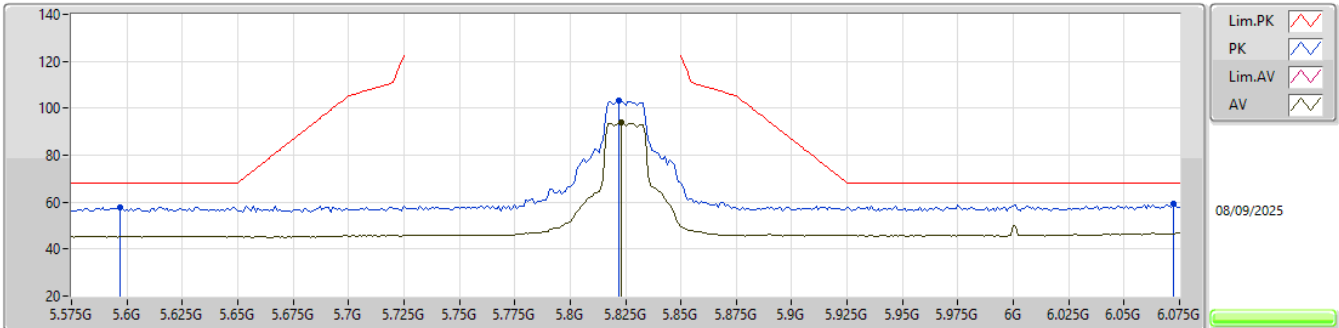EUT_Z_1TX
Setting 22
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.597G	57.90	68.20	-10.30	53.18	3	Horizontal	203.9	1.14	-	31.61	6.91	33.80			
PK	5.822G	103.50	Inf	-Inf	98.03	3	Horizontal	203.9	1.14	-	32.04	7.20	33.77			
AV	5.823G	93.73	Inf	-Inf	88.25	3	Horizontal	203.9	1.14	-	32.05	7.20	33.77			
PK	6.072G	59.31	68.20	-8.89	53.15	3	Horizontal	203.9	1.14	-	32.50	7.36	33.70			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5825MHz_TX

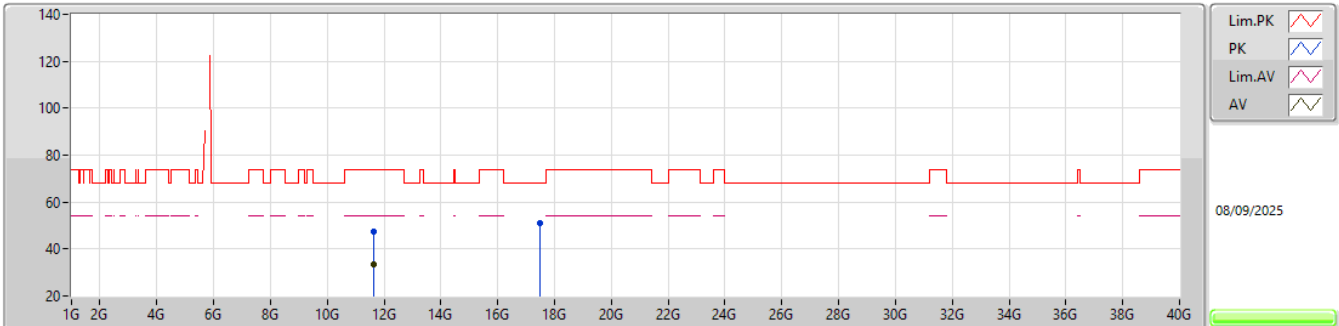EUT_Z_1TX
Setting 22
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.63518G	47.57	74.00	-26.43	62.68	3	Vertical	198	2.21	-	39.29	11.68	66.08			
AV	11.63758G	33.59	54.00	-20.41	48.72	3	Vertical	198	2.21	-	39.27	11.68	66.08			
PK	17.48466G	51.24	68.20	-16.96	59.19	3	Vertical	39	1.55	-	42.31	14.00	64.26			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

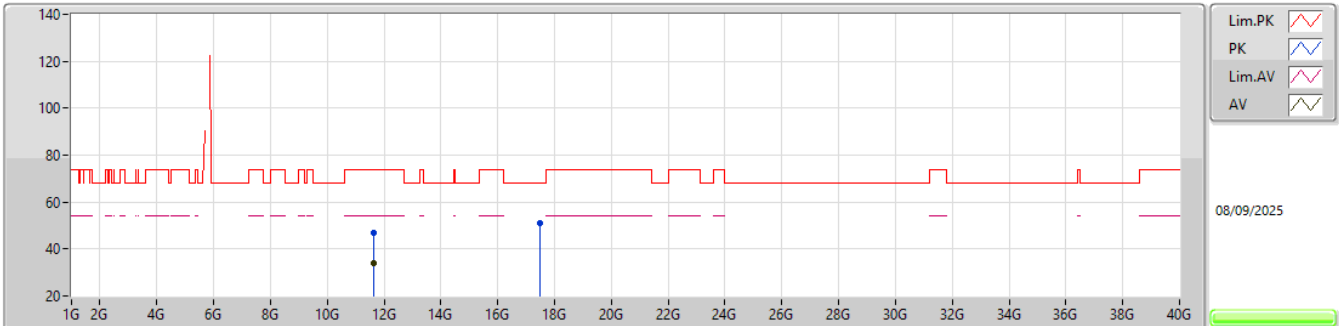


EUT_Z_1TX
Setting 22
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65594G	46.96	74.00	-27.04	62.14	3	Horizontal	72	1.63	-	39.19	11.69	66.06			
AV	11.64304G	33.74	54.00	-20.26	48.88	3	Horizontal	72	1.63	-	39.24	11.69	66.07			
PK	17.48208G	50.90	68.20	-17.30	58.87	3	Horizontal	288	2.26	-	42.29	14.00	64.26			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

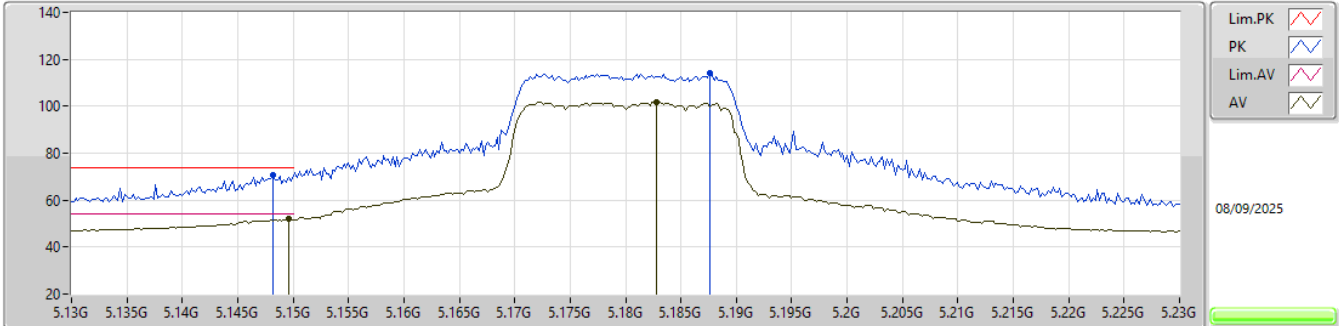


EUT_Z_1TX
Setting 16.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1482G	70.54	74.00	-3.46	65.60	3	Vertical	47	2.41	-	31.89	6.77	33.72			
AV	5.1496G	51.85	54.00	-2.15	46.89	3	Vertical	47	2.41	-	31.90	6.78	33.72			
PK	5.1876G	114.27	Inf	-Inf	109.50	3	Vertical	47	2.41	-	31.67	6.83	33.73			
AV	5.1828G	101.71	Inf	-Inf	96.91	3	Vertical	47	2.41	-	31.70	6.83	33.73			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

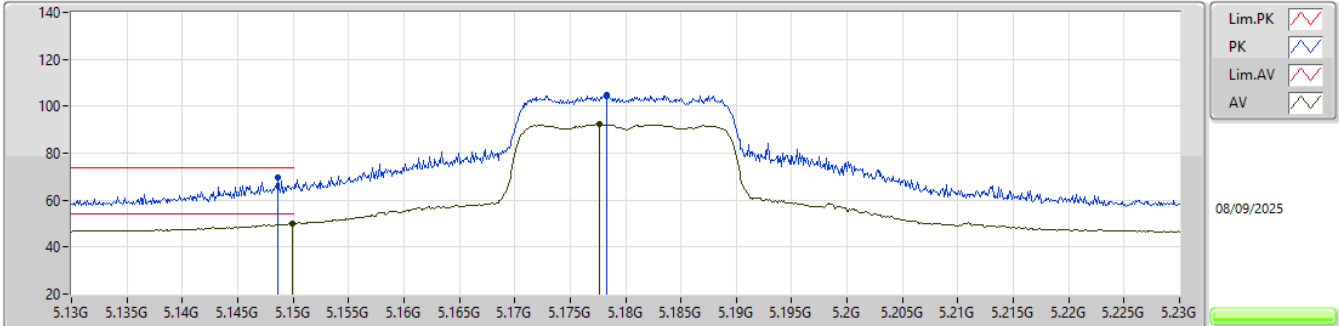


EUT_Z_1TX
Setting 19
06-E-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1486G	69.65	74.00	-4.35	63.19	3	Horizontal	82.4	1.05	-	33.90	7.49	34.93			
AV	5.1499G	50.02	54.00	-3.98	43.56	3	Horizontal	82.4	1.05	-	33.90	7.49	34.93			
PK	5.1783G	104.91	Inf	-Inf	98.26	3	Horizontal	82.4	1.05	-	34.01	7.56	34.92			
AV	5.1776G	92.43	Inf	-Inf	85.78	3	Horizontal	82.4	1.05	-	34.01	7.56	34.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5180MHz_TX

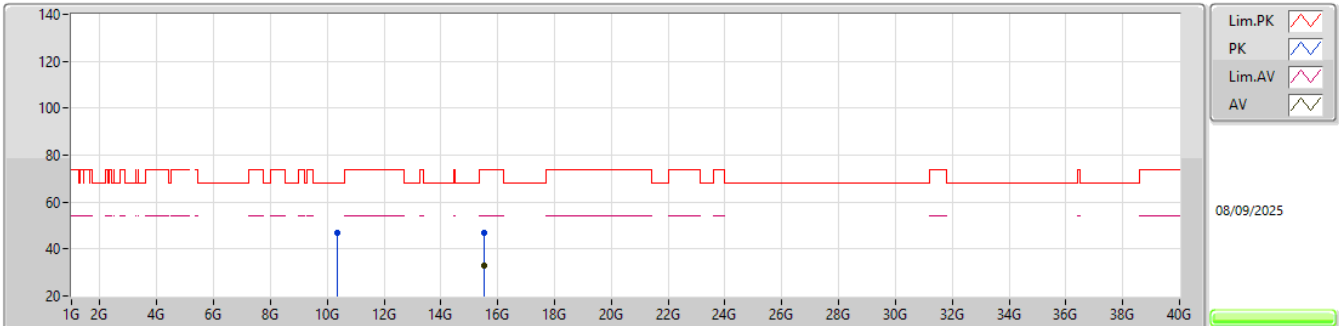EUT_Z_1TX
Setting 19
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35385G	46.64	68.20	-21.56	64.07	3	Vertical	333	1.10	-	38.08	11.16	66.67			
PK	15.52671G	46.77	74.00	-27.23	59.31	3	Vertical	277	1.73	-	38.39	12.89	63.82			
AV	15.52824G	32.96	54.00	-21.04	45.50	3	Vertical	277	1.73	-	38.39	12.89	63.82			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5180MHz_TX

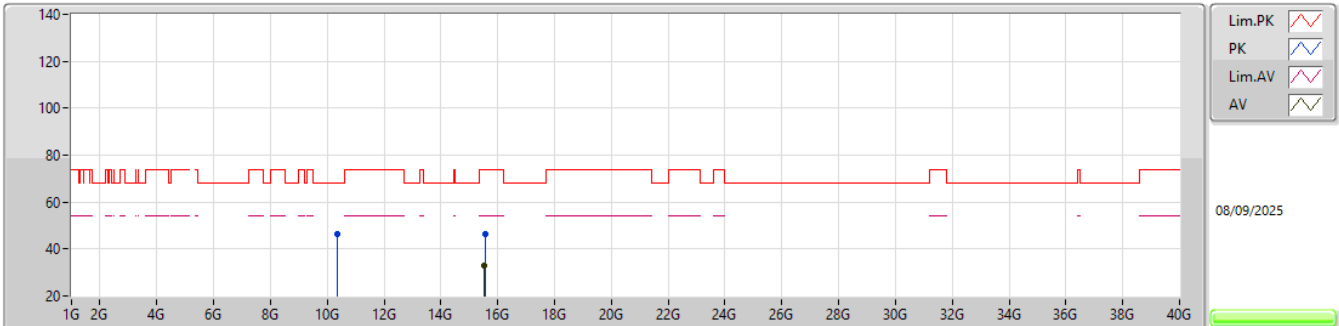EUT_Z_1TX
Setting 19
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36729G	46.35	68.20	-21.85	63.82	3	Horizontal	28	1.12	-	38.03	11.17	66.67			
PK	15.54933G	46.32	74.00	-27.68	58.94	3	Horizontal	325	1.14	-	38.30	12.91	63.83			
AV	15.53709G	32.95	54.00	-21.05	45.52	3	Horizontal	325	1.14	-	38.35	12.90	63.82			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

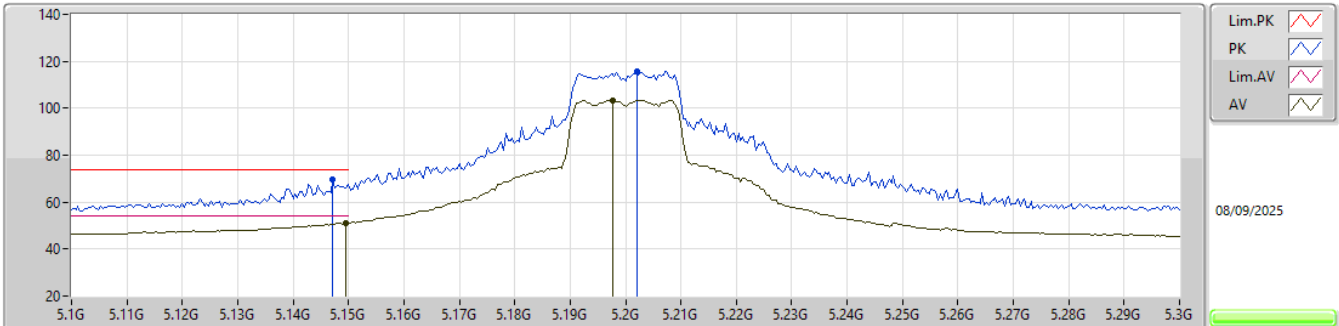


EUT_Z_1TX
Setting 20.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1472G	69.58	74.00	-4.42	64.64	3	Vertical	47	2.16	-	31.89	6.77	33.72			
AV	5.1496G	51.10	54.00	-2.90	46.14	3	Vertical	47	2.16	-	31.90	6.78	33.72			
PK	5.202G	115.92	Inf	-Inf	111.21	3	Vertical	47	2.16	-	31.59	6.85	33.73			
AV	5.1976G	103.27	Inf	-Inf	98.54	3	Vertical	47	2.16	-	31.61	6.85	33.73			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

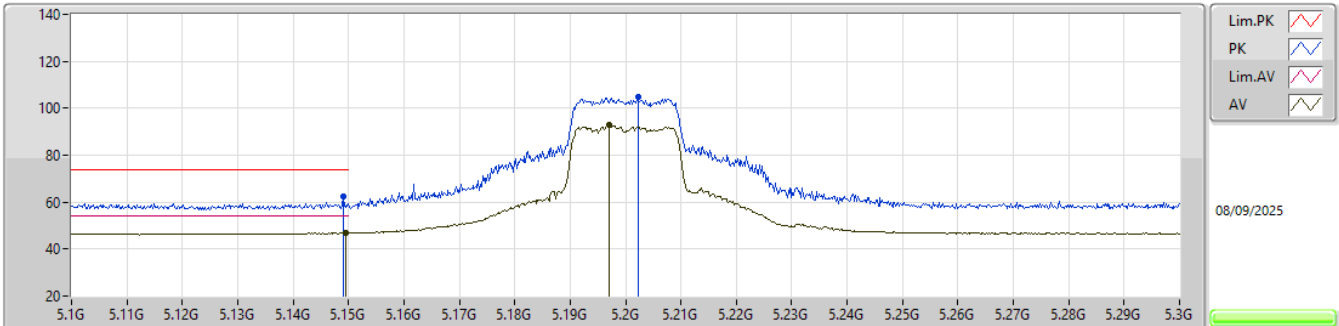


EUT_Z_1TX
Setting 20.5
06-E-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.149G	62.51	74.00	-11.49	56.05	3	Horizontal	210.4	1.28	-	33.90	7.49	34.93				
AV	5.1496G	46.81	54.00	-7.19	40.35	3	Horizontal	210.4	1.28	-	33.90	7.49	34.93				
PK	5.2022G	104.59	Inf	-Inf	97.80	3	Horizontal	210.4	1.28	-	34.10	7.61	34.92				
AV	5.197G	92.68	Inf	-Inf	85.91	3	Horizontal	210.4	1.28	-	34.09	7.60	34.92				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

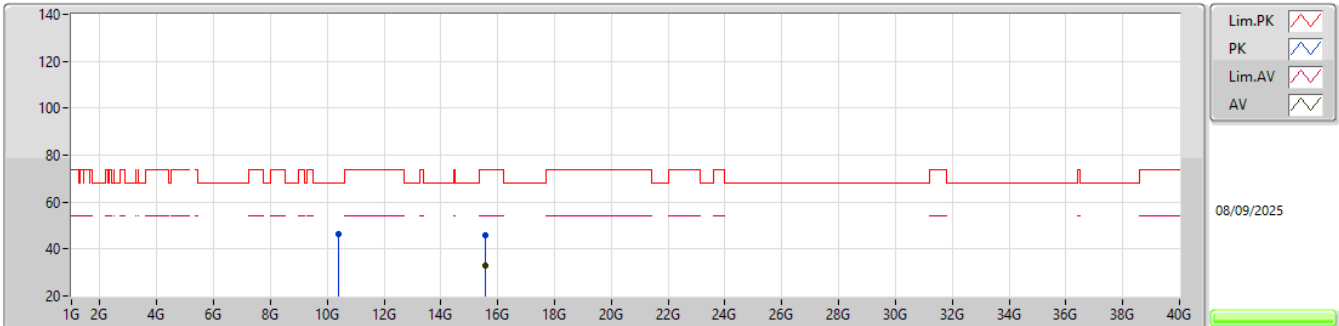


EUT_Z_1TX
Setting 20.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39166G	46.46	68.20	-21.74	64.03	3	Vertical	16	2.68	-	37.93	11.18	66.68			
PK	15.58713G	45.83	74.00	-28.17	58.58	3	Vertical	224	1.95	-	38.15	12.94	63.84			
AV	15.58605G	32.83	54.00	-21.17	45.57	3	Vertical	224	1.95	-	38.16	12.94	63.84			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

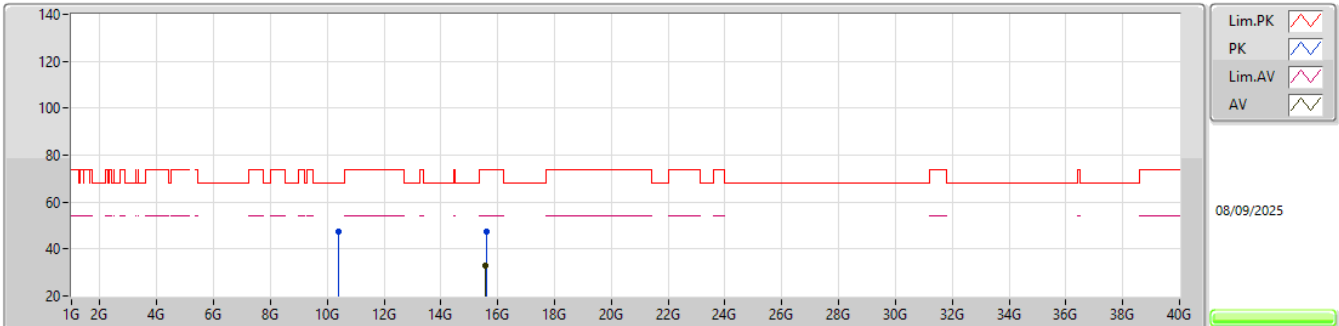EUT_Z_1TX
Setting 20.5
03-G-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38917G	47.32	68.20	-20.88	64.88	3	Horizontal	287	2.51	-	37.94	11.18	66.68			
PK	15.58779G	47.41	74.00	-26.59	60.16	3	Horizontal	316	2.84	-	38.15	12.94	63.84			
AV	15.58662G	32.77	54.00	-21.23	45.52	3	Horizontal	316	2.84	-	38.15	12.94	63.84			