

FCC PART 15.239
EMI MEASUREMENT AND TEST REPORT
For
TELEWAY INDUSTRIAL LTD

5/F , Block 40, MaJialong Industrial Area, Nanshan District, Shenzhen, 518052, Guangdong Province, PRC

FCC ID: TM4TMP3FTG

September 15, 2006

This Report Concerns: ☒ Original Report	Equipment Type: FM TRANSMITTER
Test Engineer: Charmi Peng <i>Charmi Peng</i>	
Report No.: RSZ06082901	
Test Date: September 14, 2006	
Reviewed By: Boni Baniqued <i>Boni Baniqued</i>	
Prepared By: Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Bay Area Compliance Lab Corp.
(ShenZhen). This report **must not** be used by the client to claim product certification,
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
§15.203 - ANTENNA REQUIREMENT.....	8
STANDARD APPLICABLE	8
§15.209 AND §15.239- RADIATED EMISSION	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP.....	9
EMI TEST RECEIVER SETUP.....	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST RESULTS SUMMARY	10
TEST DATA	11
§15.239(A) –EMISSION BANDWIDTH	13
STANDARD APPLICABLE.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	13
§15.239(C) –OUT OF BAND EMISSION	17
TEST STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *TELEWAY INDUSTRIAL LTD*'s product, model: TMP3FTG or the "EUT" as referred to in this report is a FM TRANSMITTER which measures approximately 8.5 cm L x 5.5 cm W x 2.5 cm H, rated input voltage: DC 3 V battery.

** The test data gathered are from an engineering sample, serial number: 0608043 provided by the manufacturer, we receive the EUT on 2006-8-29.*

Objective

This Type approval report is prepared on behalf of *TELEWAY INDUSTRIAL LTD* in accordance with FCC Part 15, Subpart C, and section 15.209, 15.35, 15.205, and 15.239 rules.

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect radiated and conducted emission measurement data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
NANYAN	Audio Generator	NY2201	007727	DoC

External I/O Cable

Cable Description	Length (M)	From/Port	To
Antenna and audio input unshielded Cable	0.36	EUT	Audio Signal Generator

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.


Special Accessories

The special accessories were provided by Bay Area Compliance Lab Corp. (ShenZhen).


Equipment Modifications

Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

Configuration of Test Setup

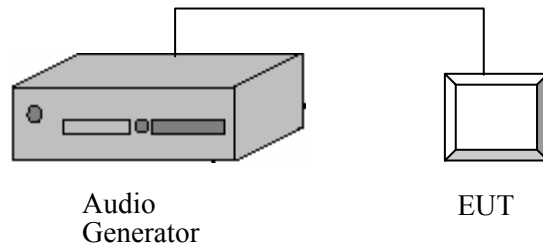

Block Diagram of Test Setup

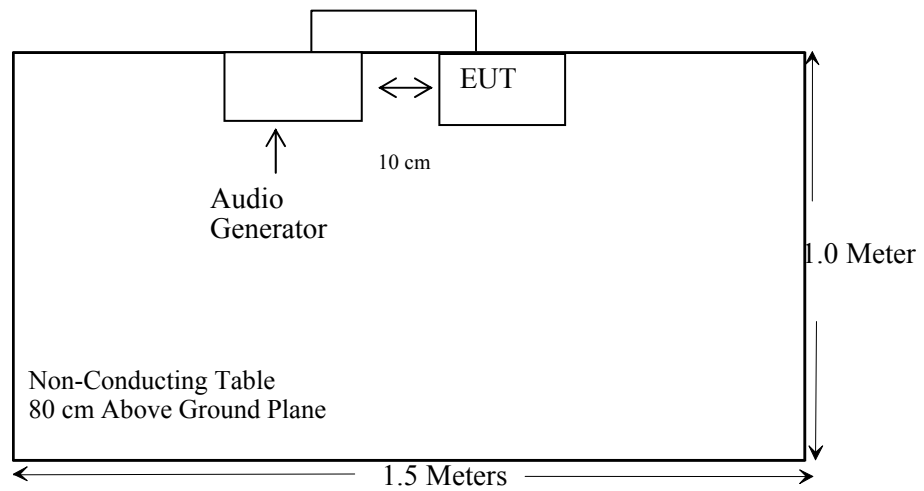

SUMMARY OF TEST RESULTS

RULES	DESCRIPTION OF TEST	RESULT
§15.205	Restricted Band of operation	Compliant
§15.209/§15.239	Radiated Emission	Compliant*
§15.239 (a)	Emission Bandwidth	Compliant
§15.239 (c)	Out of Band Emission	Compliant

* Within measurement uncertainty.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna is build on board; fulfill the requirement of this section.

Test Result: Pass


§15.209 and §15.239- RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 4.0 dB.

EUT Setup

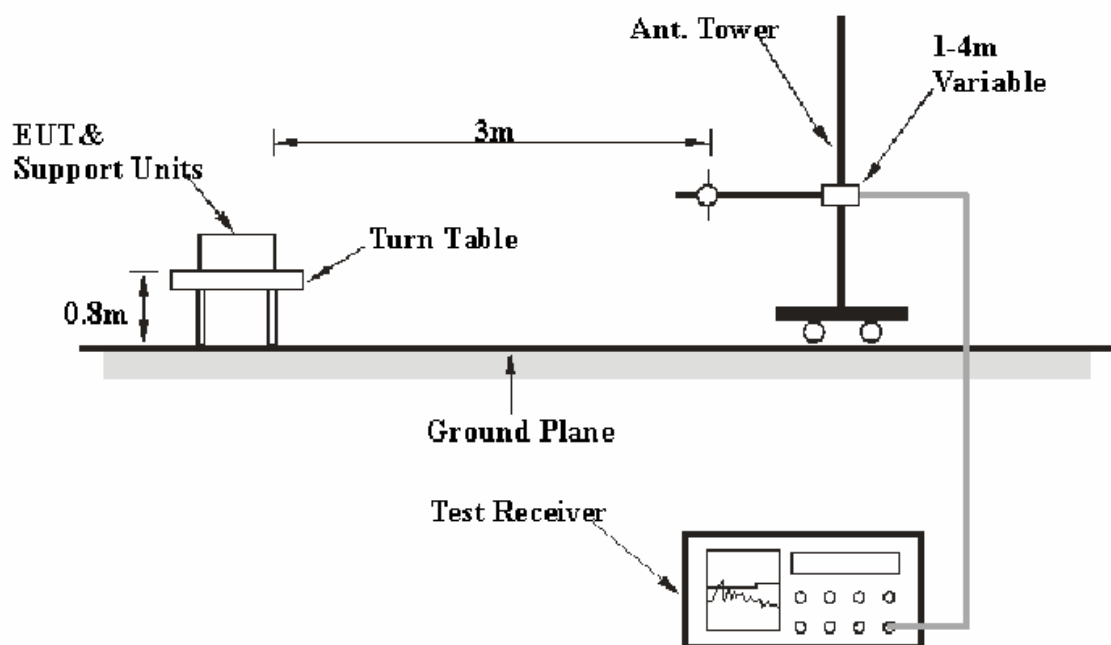

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC Part 15.209 and FCC Part 15.239.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>VBW</i>
30 – 1000 MHz	100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2006-8-17	2007-8-17
HP	Amplifier	HP8447E	1937A01046	2006-8-17	2007-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2006-4-28	2007-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -5.8dB means the emission is 5.8dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 and 15.239, with the worst margin reading of:

-5.80 dB at 271.50 MHz in the **Horizontal** polarization, Low Frequency.
-3.20 dB at 298.50 MHz in the **Horizontal** polarization, Middle Frequency
-0.90 dB at 107.70 MHz in the **Horizontal** polarization, High Frequency

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	53%
ATM Pressure:	1002mbar

The testing was performed by Charmi Peng on 2006-9-14.

Test Mode: Transmitting (Low channel)

Frequency MHz	Meter Reading dBuV/m	Detector PK/QP/AV	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier Gain dB	Cord. Amp. dBuV/m	FCC PART 15.239 & FCC PART 15.209		
										Limit dBuV/m	Margin dB	
271.5	53.8	QP	60	1.0	H	12.6	1.4	27.6	40.2	46	-5.8	Harmonic
90.5	61.5	AV	180	1.0	H	7.7	0.9	28.6	41.5	48	-6.5	Fundamental
362.0	48.0	QP	120	1.5	H	15.4	1.8	27.7	37.5	46	-8.5	Harmonic
90.5	56.2	AV	300	1.0	V	7.7	0.9	28.6	36.2	48	-11.8	Fundamental
543.0	41.2	QP	60	1.0	H	18.8	2.5	28.6	33.9	46	-12.1	Harmonic
633.5	39.6	QP	90	1.0	H	19.6	2.8	28.6	33.4	46	-12.6	Harmonic
452.5	41.9	QP	45	1.0	H	17.1	2.2	28.4	32.8	46	-13.3	Harmonic
543.0	39.3	QP	60	1.2	V	18.8	2.5	28.6	32.0	46	-14.0	Harmonic
633.5	38.2	QP	90	1.2	V	19.6	2.8	28.6	32.0	46	-14.0	Harmonic
452.5	38.3	QP	45	1.2	V	17.1	2.2	28.4	29.2	46	-16.8	Harmonic
271.5	41.9	QP	45	1.2	V	12.6	1.4	27.6	28.3	46	-17.7	Harmonic
181.0	40.1	QP	180	1.5	H	11.8	1.3	28.1	25.1	43.5	-18.4	Harmonic
362.0	35.5	QP	120	1.2	V	15.4	1.8	27.7	25.0	46	-21.0	Harmonic
181.0	33.3	QP	180	1.2	V	11.8	1.3	28.1	18.3	43.5	-25.2	Harmonic
90.5	62.5	PK	45	1.0	H	7.7	0.9	28.6	42.5	68	-25.5	Fundamental
90.5	56.5	PK	270	1.2	V	7.7	0.9	28.6	36.6	68	-31.5	Fundamental

Test Mode: Transmitting (Middle channel)

Frequency MHz	Meter Reading dBuV/m	Detector PK/QP/AV	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier Gain dB	Cord. Amp. dBuV/m	FCC PART 15.239 & FCC PART 15.209		
										Limit dBuV/m	Margin dB	
298.5	55.0	QP	60	1.0	H	13.8	1.6	27.6	42.8	46	-3.2	Harmonic
99.5	63.8	AV	180	1.0	H	8.2	0.9	28.6	44.4	48	-3.6	Fundamental
497.5	49.2	QP	120	1.5	H	18.2	2.4	28.5	41.3	46	-4.8	Harmonic
597.0	45.1	QP	60	1.0	H	19.3	2.7	28.6	38.5	46	-7.5	Harmonic
398.0	47.5	QP	90	1.0	H	16.0	1.9	28.1	37.3	46	-8.7	Harmonic
99.5	57.5	AV	270	1.2	V	8.2	0.9	28.6	38.1	48	-9.9	Fundamental
497.5	43.9	QP	45	1.2	V	18.2	2.4	28.5	36.0	46	-10.0	Harmonic
597.0	39.0	QP	120	1.2	V	19.3	2.7	28.6	32.4	46	-13.6	Harmonic
199.0	44.2	QP	45	1.0	H	12.0	1.3	28	29.5	43.5	-14.0	Harmonic
298.5	42.2	QP	300	1.0	V	13.8	1.6	27.6	30.0	46	-16.0	Harmonic
398.0	38.5	QP	60	1.2	V	16.0	1.9	28.1	28.3	46	-17.7	Harmonic
199.0	37.8	QP	90	1.2	V	12.0	1.3	28	23.1	43.5	-20.5	Harmonic
99.5	64.2	PK	45	1.0	H	8.2	0.9	28.6	44.7	68	-23.3	Fundamental
99.5	58.5	PK	180	1.5	V	8.2	0.9	28.6	39.1	68	-28.9	Fundamental

Test Mode: Transmitting (High channel)

Frequency MHz	Meter Reading dBuV/m	Detector PK/QP/AV	Direction Degree	Height Meter	Polar H / V	Antenna factor dB/m	Cable loss dB	Amplifier Gain dB	Cord. Amp. dBuV/m	FCC PART 15.239 & FCC PART 15.209		
										Limit dBuV/m	Margin dB	
107.7	63.6	AV	180	1.0	H	11.0	1.0	28.5	47.1	48	-0.9*	Fundamental
323.1	54.4	QP	45	1.0	H	14.3	1.7	27.7	42.7	46	-3.3	Harmonic
107.7	57.7	AV	300	1.0	V	11.0	1.0	28.5	41.2	46	-4.9	Fundamental
538.5	47.5	QP	60	1.0	H	18.6	2.5	28.6	40.0	46	-6.0	Harmonic
430.8	48.1	QP	60	1.0	H	16.8	2.2	28.3	38.8	46	-7.2	Harmonic
215.4	51.2	QP	180	1.5	H	11.4	1.3	27.8	36.1	43.5	-7.4	Harmonic
538.5	45.6	QP	45	1.2	V	18.6	2.5	28.6	38.1	46	-7.9	Harmonic
861.6	39.0	QP	120	1.2	V	22.6	3.5	28.1	37.0	46	-9.0	Harmonic
646.2	41.1	QP	90	1.0	H	19.9	2.9	28.6	35.3	46	-10.7	Harmonic
430.8	43.3	QP	60	1.2	V	16.8	2.2	28.3	34.0	46	-12.0	Harmonic
646.2	38.9	QP	90	1.2	V	19.9	2.9	28.6	33.1	46	-12.9	Harmonic
861.6	34.3	QP	120	1.5	H	22.6	3.5	28.1	32.3	46	-13.7	Harmonic
323.1	41.4	QP	45	1.2	V	14.3	1.7	27.7	29.7	46	-16.3	Harmonic
215.4	41.0	QP	180	1.2	V	11.4	1.3	27.8	25.9	43.5	-17.6	Harmonic
107.7	64.0	PK	45	1.0	H	11.0	1.0	28.5	47.5	68	-20.5	Fundamental
107.7	58.4	PK	270	1.2	V	11.0	1.0	28.5	41.9	68	-26.1	Fundamental

* Within measurement uncertainty.

§15.239(a) –EMISSION BANDWIDTH

Standard applicable

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88–108 MHz.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2006-8-17	2007-8-17
HP	Amplifier	HP8447E	1937A01046	2006-8-17	2007-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2006-4-28	2007-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.


Test Data

Environmental Conditions

Temperature:	27 ° C
Relative Humidity:	56%
ATM Pressure:	1002mbar


The testing was performed by Charmi Peng on 2006-9-14.

Transmitting channel	Transmitting frequency (MHz)	Emission bandwidth (kHz)	Limit (kHz)	Result
Low channel	90.5	79.2	200	Pass
Mid channel	99.5	128.0	200	Pass
High channel	107.7	118.4	200	Pass

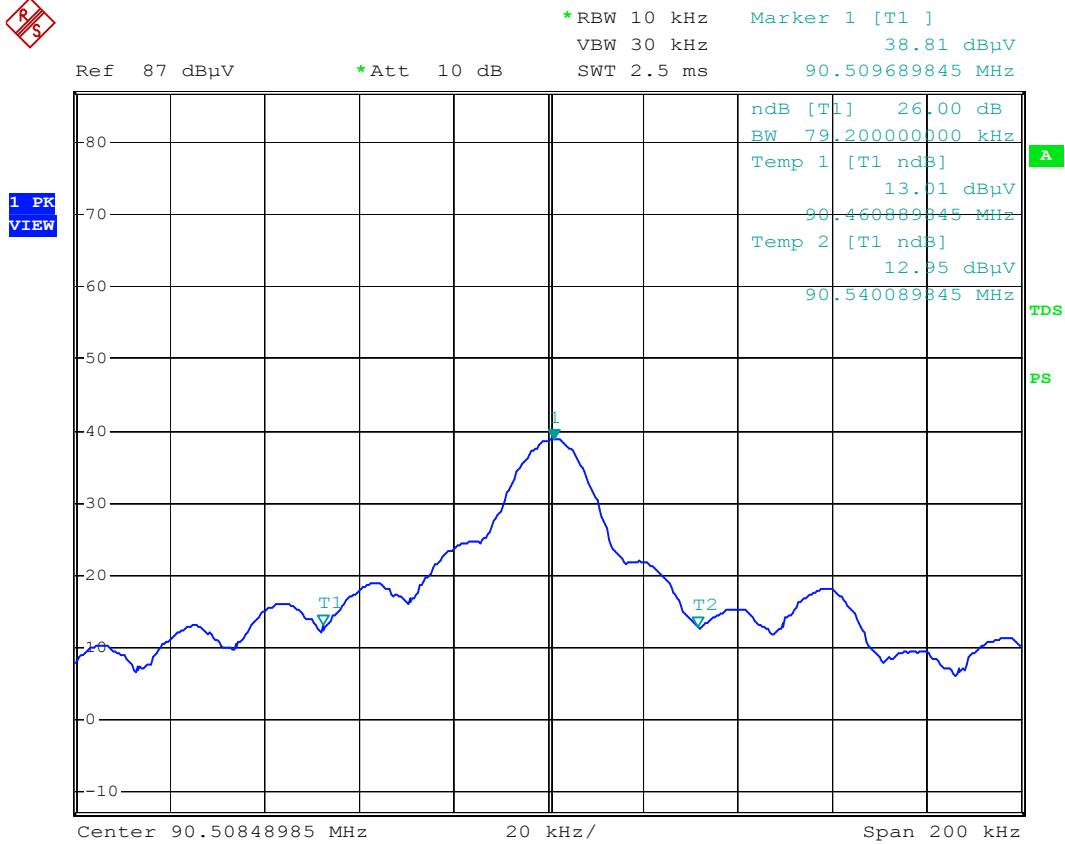


Emission bandwidth Low channel

Date: 13.SEP.2006 10:17:31

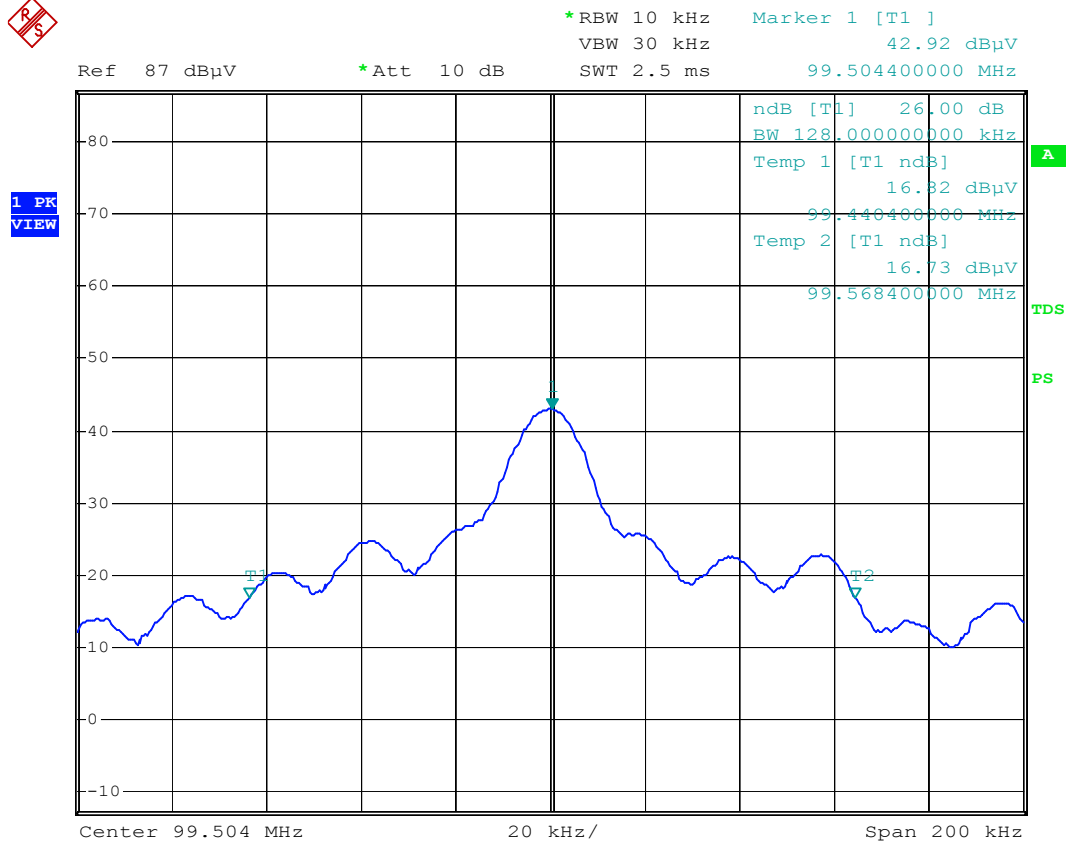

Emission bandwidth Mid channel

Date: 13.SEP.2006 10:27:32

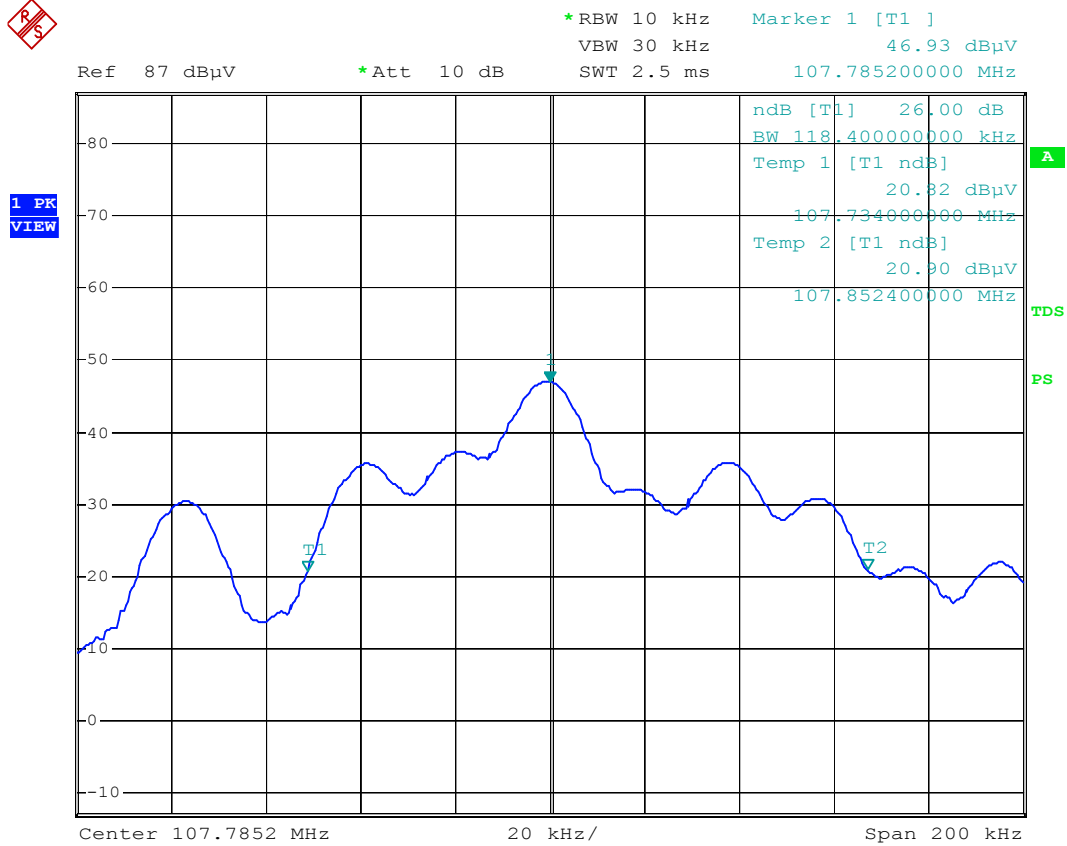

Emission bandwidth High channel

Date: 13.SEP.2006 10:30:21

§15.239(c) –OUT OF BAND EMISSION

Test Standard

The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in §15.209.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2006-8-17	2007-8-17
HP	Amplifier	HP8447E	1937A01046	2006-8-17	2007-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2006-4-28	2007-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data

Environmental Conditions

Temperature:	27 ° C
Relative Humidity:	56%
ATM Pressure:	1002mbar

The testing was performed by Charmi Peng on 2006-9-14.

Transmitting channel	Transmitting frequency (MHz)	Out of band frequency (MHz)	Level (dBuv/m)	Limit (dBuv/m)	Result
Low channel	90.5	90.4	7.90	43.5	Pass
		90.6	8.30	43.5	Pass
Mid channel	99.5	99.4	11.67	43.5	Pass
		99.6	22.88	43.5	Pass
High channel	107.7	107.6	8.90	43.5	Pass
		107.8	19.45	43.5	Pass