




TENSHO MODEL CO., LTD.

5th Floor, XieSheng Industrial Building, NO. 70 , LongShan
Middle Road, Xiamen, China.

TEL: 0086-592- 5590708, 5590728, 5590758

FAX: 0086-592-5590755

Operation Description

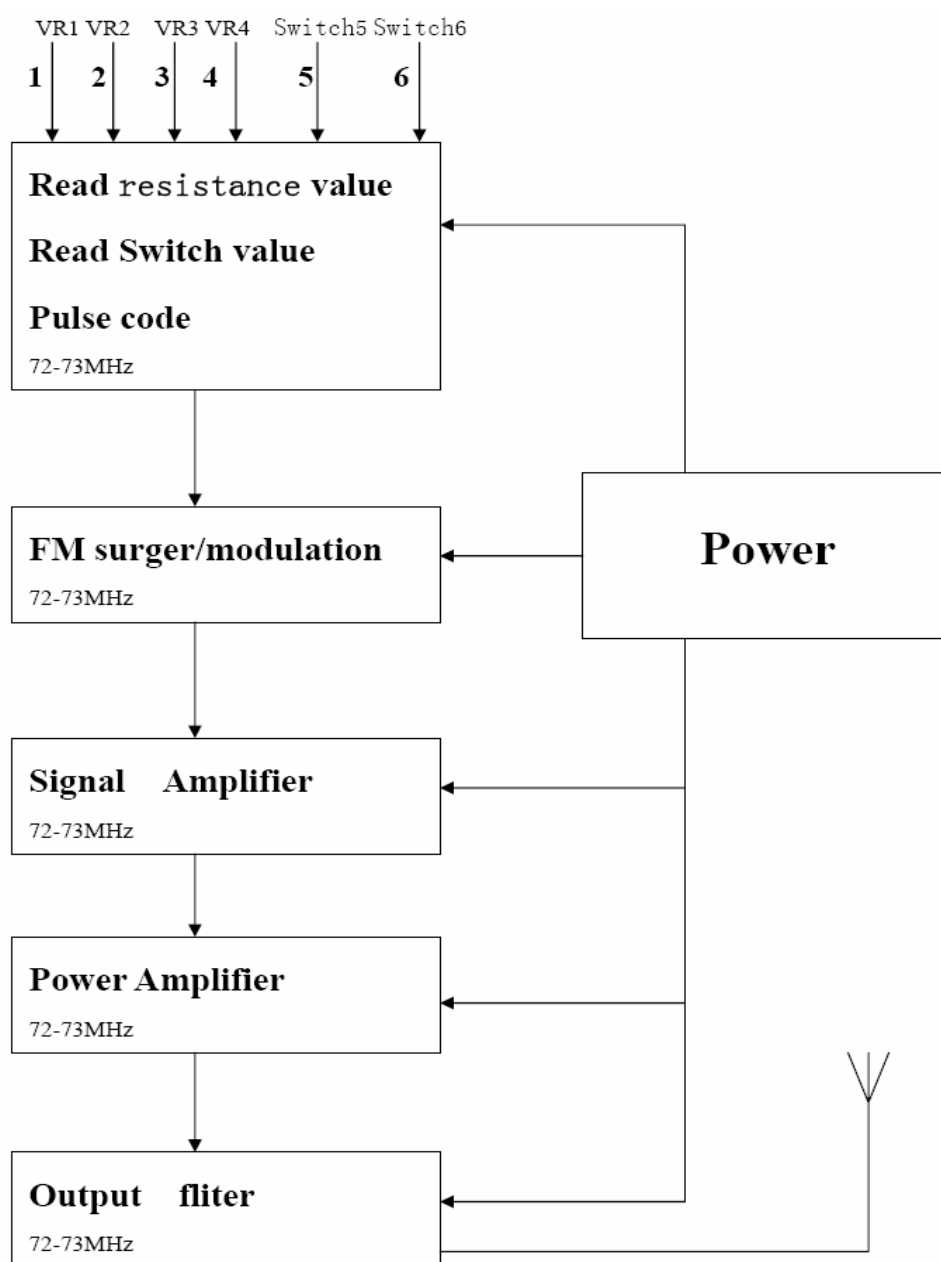

Note: In the SCHEMATICS, you can find another Tx, Tx2(4M). It is used to give an operation clock to the SCM only.



TENSHO MODEL CO., LTD.

5th Floor, XieSheng Industrial Building, NO. 70 , LongShan
Middle Road, Xiamen, China.

TEL: 0086-592- 5590708, 5590728, 5590758

FAX: 0086-592-5590755

1. Read resistance value from each channel (Ch1, Ch2, Ch3, Ch4 from VR 1~4, Ch5 and Ch6 from switch 5 and switch 6)
2. Determine the Pulse Code and send the Pulse Code to FM suger/Modulation .
3. Get the Signal Amplified and Power of the signal amplified.
4. filtrate the signal and sent out the signal from the Antenna.