

TEST REPORT

OF

FCC Part 15 Subpart C §15.209, §15.231
IC RSS-210 Issue 9, RSS-Gen Issue 4

FCC ID : TQ8-RKE-4F37
IC Certification : 5074A-RKE4F37

Equipment Under Test : Remote Keyless Entry
Model Name : RKE-4F37
Applicant : Hyundai Mobis Co., Ltd.
Manufacturer : SeoyonElectornics Co., Ltd.
Date of Receipt : 2017.05.19
Date of Test(s) : 2017.05.31 ~ 2017.06.30
Date of Issue : 2017.06.30

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Brant Jang

Date:

2017.06.30

Technical
Manager:



Hyunchae You

Date:

2017.06.30

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

TABLE OF CONTENTS

1. General Information -----	3
2. Field Strength of Fundamental and Spurious Emission-----	6
3. Bandwidth of Operation Frequency-----	20
4. Occupied Bandwidth-----	22
5. Transmission Time-----	24
6. Duty Cycle Correction Factor-----	26

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

1.2. Details of applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, Republic of Korea

Contact Person : Choi, Seung-Hoon

Phone No. : +82 31 260 0098

1.3. Description of EUT

Kind of Product	Remote Keyless Entry
Model Name	RKE-4F37
Power Supply	DC 3.0 V (Lithium type of battery)
Frequency Range	Tx: 433.92 MHz
Modulation Type	FSK
Number of Channel	1
Antenna Type	PCB Antenna

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

1.4. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMBV100A	255834	Jun. 15, 2017	Annual	Jun. 15, 2018
Spectrum Analyzer	Agilent	N9020A	MY53421758	Sep. 23, 2016	Annual	Sep. 23, 2017
Spectrum Analyzer	R&S	FSV30	103454	Dec. 01, 2016	Annual	Dec. 01, 2017
Test Receiver	R&S	ESU26	100109	Feb. 17, 2017	Annual	Feb. 17, 2018
DC Power Supply	Agilent	U8002A	MY50060028	Mar. 16, 2017	Annual	Mar. 16, 2018
Preamplifier	H.P.	8447F	2944A03909	Aug. 11, 2016	Annual	Aug. 11, 2017
Preamplifier	R&S	SCU-18	10117	Apr. 08, 2017	Annual	Apr. 08, 2018
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40SS	7	Mar. 30, 2017	Annual	Mar. 30, 2018
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-0399	Aug. 19, 2015	Biennial	Aug. 19, 2017
Trilog Broadband Antenna	Schwarzbeck Mess-Elektronik	VULB9163	437	Oct. 18, 2016	Biennial	Oct. 18, 2018
Horn Antenna	R&S	HF906	100326	Feb. 01, 2016	Biennial	Feb. 01, 2018
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38330516/L	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/38330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

- The Signal generator was used before calibration due date.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

1.5. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD			
Section in FCC Part 15	Section in RSS-210, RSS-Gen	Test Item	Result
15.209(a) 15.231(b)	RSS-210 Issue 9, A.1, Table A1 RSS-Gen Issue 4, 8.9	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
15.231©	-	Bandwidth of Operation Frequency	Complied
15.231(a)	RSS-210 Issue 9, A1.1	Transmission Time	Complied
-	RSS-210 Issue 9, A1.3 RSS-Gen Issue 4, 6.6	Occupied Bandwidth	Complied

1.6. Test Report Revision

Revision	Report number	Date of issue	Description
0	F690501/RF-RTL011418	2017.06.07	Initial
1	F690501/RF-RTL011418-1	2017.06.29	Changed the duty cycle of EUT and retested all of the test items.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


2. Field Strength of Fundamental and Spurious Emission

2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 30 MHz Emissions.

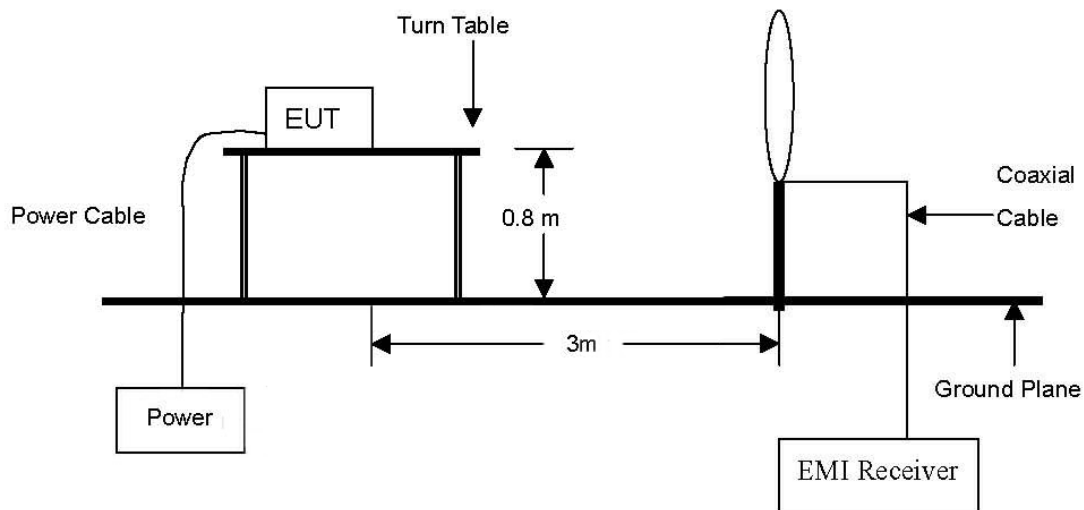


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

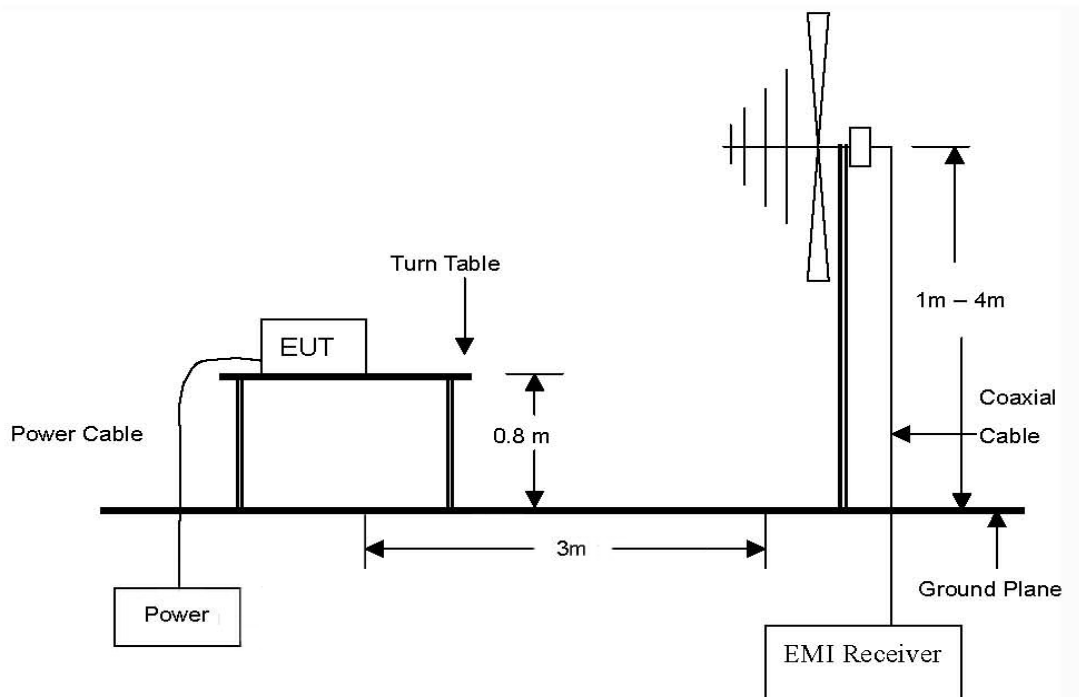

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

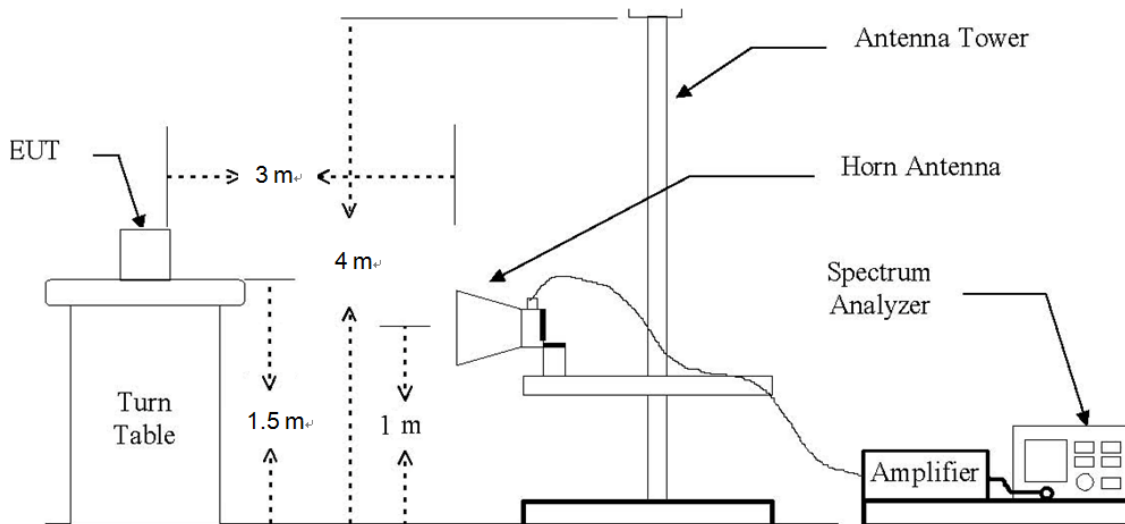

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2. Limit

2.2.1. FCC limits

2.2.1.1. Radiated emission limits; general requirements.

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., § 15.231 and § 15.241.

2.2.1.2. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

According to § 15.231(b), in addition to the provisions of Section § 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750 **	¹ 125 to 375 **
174-260	3,750	375
260-470	¹ 3,750 to 12,500 **	¹ 375 to 1,250 **
Above 470	12,500	1,250

¹linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu V/m$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu V/m$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2.2. IC limits

2.2.2.1. Transmitter Emission Limits for Licence-Exempt Radio Apparatus

According to RSS-Gen Issue 4, Section 8.9, except when the requirements applicable to a given device state otherwise, the emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 4- General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength ($\mu V/m$ at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960 *	500

* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

Table 5- General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Below 30 MHz

Frequency	Electric Field Strength ($\mu V/m$)	Magnetic Field Strength (H-Field) ($\mu A/m$)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705 - 30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector. Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the relevant RSS.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.2.2.2. Momentarily Operated Devices

According to A.1 of RSS-210 Issue 9, the frequency bands and field strength limits in tables A1 and A2 of this annex are reserved exclusively for the transmission of a control signal, such as that used with alarm systems, door openers, remote switches, etc. Data may be sent with a control signal. Radio control of toys or model aircraft, as well as continuous transmissions, such as voice or video, are not permitted, except as provided in Section A.1.4 below.

Table A1— Permissible Field Strength Limits for Momentarily Operated Devices

Fundamental Frequency (MHz), Excluding Restricted Frequency Bands Specified in RSS-Gen	Field Strength of the Fundamental Emissions ($\mu\text{V/m}$ at 3 m)
70-130	1,250
130-174	1,250 to 3,750
174-260 ^(Note 1)	3,750
260-470 ^(Note 1)	3,750 to 12,500
Above 470	12,500

* Linear interpolation with frequency, f, in MHz:

For 130-174 MHz: Frequency Strength ($\mu\text{V/m}$) = $(56.82 \times f) - 6136$

For 260-470 MHz: Frequency Strength ($\mu\text{V/m}$) = $(41.67 \times f) - 7083$

Note 1: Frequency bands 225-328.6 MHz and 335.4-399.9 MHz are designated for the exclusive use of the Government of Canada. Manufacturers should be aware of possible harmful interference and degradation of their licence-exempt radio equipment in these frequency bands.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10:2013

2.3.1. Test Procedures for emission below 30 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note;

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 meter open field test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

2.3.2. Test Procedures for emission from 30 MHz to 1 000 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2.3.3. Test Procedures for emission above 1 GHz

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1 GHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

2.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

2.4.1. Field Strength of Fundamental

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Freq. (MHz)	Detector	Ant. Pol.	Reading (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
433.88	Peak	H	61.30	16.06	2.95	80.31	100.83	20.52
433.88	Average	H	59.79	16.06	2.95	78.80	80.83	2.03


Remark:

To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-axis. Worst case is **X-axis**.

Definition of DUT for three orthogonal planes is described in the test setup photos.

Note:

- 3 m Limit (dB μ V/m) = $20\log[41.67(F_{MHz}) - 7083] = 80.83$
- Result = Reading + Antenna Factor + Cable Loss
- Average Result = The average result was investigated due to Pulse train over 100 ms.
- Duty Cycle Correction Factor : $20\log(T_{on} / 100 \text{ ms}) = 20\log(84.06 / 100) = -1.51$
 - T_{on} time = 84.06 ms
 - T_{on+off} time = 100.00 ms (The EUT has only one burst of transmission.)

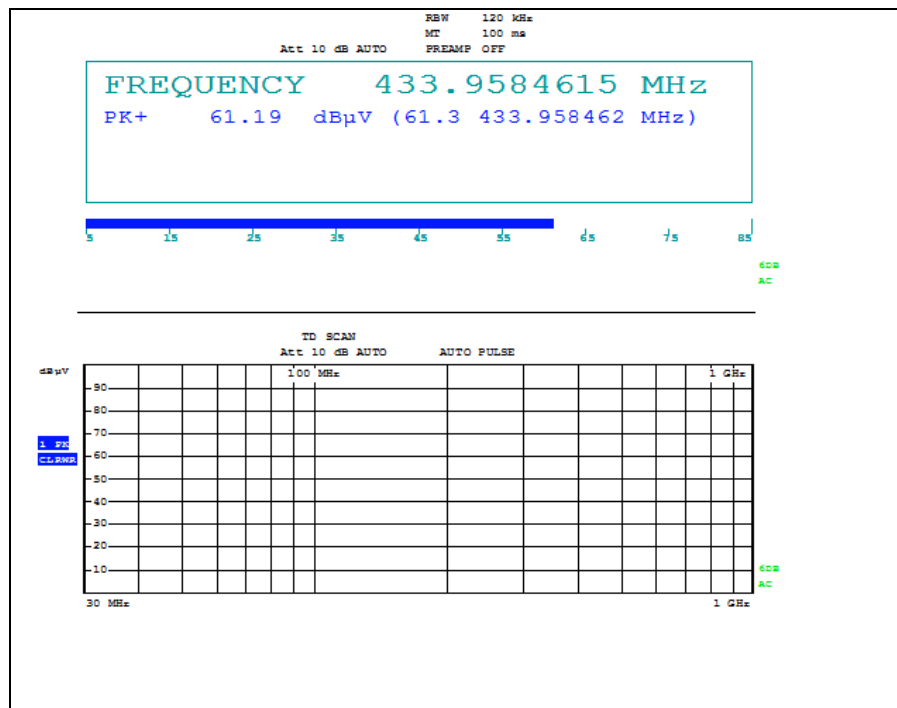

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

2.4.2. Spurious Emission

The following table shows the highest levels of radiated emissions on polarizations of horizontal. The frequency spectrum from 9 kHz to 4 500 MHz was investigated.

Radiated Emissions			Ant.	Correction Factors		Total	Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	Amp Gain + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*1 301.70	57.79	Peak	V	24.58	-32.58	49.79	74.00	24.21
*1 301.70	56.28	Average	V	24.58	-32.58	48.28	54.00	5.72
1 735.62	57.37	Peak	V	26.32	-31.49	52.20	80.83	28.63
1 735.62	55.86	Average	V	26.32	-31.49	50.69	60.83	10.14
2 169.68	54.85	Peak	V	27.92	-30.75	52.02	80.83	28.81
2 169.68	53.34	Average	V	27.92	-30.75	50.51	60.83	10.32
2 603.23	49.72	Peak	V	28.59	-29.41	48.90	80.83	31.93
2 603.23	48.21	Average	V	28.59	-29.41	47.39	60.83	13.44
3 037.88	48.40	Peak	V	29.93	-29.07	49.26	80.83	31.57
3 037.88	46.89	Average	V	29.93	-29.07	47.75	60.83	13.08
3 471.57	53.45	Peak	V	30.98	-28.56	55.87	80.83	24.96
3 471.57	51.94	Average	V	30.98	-28.56	54.36	60.83	6.47
*3 905.62	46.08	Peak	V	31.91	-28.07	49.92	74.00	24.08
*3 905.62	44.57	Average	V	31.91	-28.07	48.41	54.00	5.59
*4 339.51	50.47	Peak	V	31.93	-28.33	54.07	74.00	19.93
*4 339.51	48.96	Average	V	31.93	-28.33	52.56	54.00	1.44
Above 4 400.00	Not detected	-	-	-	-	-	-	-

Remark:



- To get a maximum emission level from the EUT, the EUT was moved throughout the X-axis, Y-axis and Z-axis. Worst Case is **Y-axis**.
Definition of DUT for three orthogonal planes is described in the test setup photos.
- 3 m Limit (dBμV/m) = $20\log[41.67(F_{\text{MHz}}) - 7083] - 20$ dBμV/m = 60.83 dBμV/m
- Correction Factors = AF + Amp Gain + CL
- Actual = Reading + AF + Amp Gain + CL
- Average Reading = Peak Reading + Duty Cycle Correction Factor
- Duty Cycle Correction Factor : $20\log(T_{\text{on}} / 100 \text{ ms}) = 20\log(84.06 / 100) = -1.51$
- T_{on} time = 84.06 ms
- $T_{\text{on+off}}$ time = 100.00 ms (The EUT has only one burst of transmission)
- "*" means the restricted band.
- According to § 15.31(o), Emission levels are not reported much lower than the limits by over 20 dB.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

The Plots of Spurious Emission


Scanning plots below 30 MHz

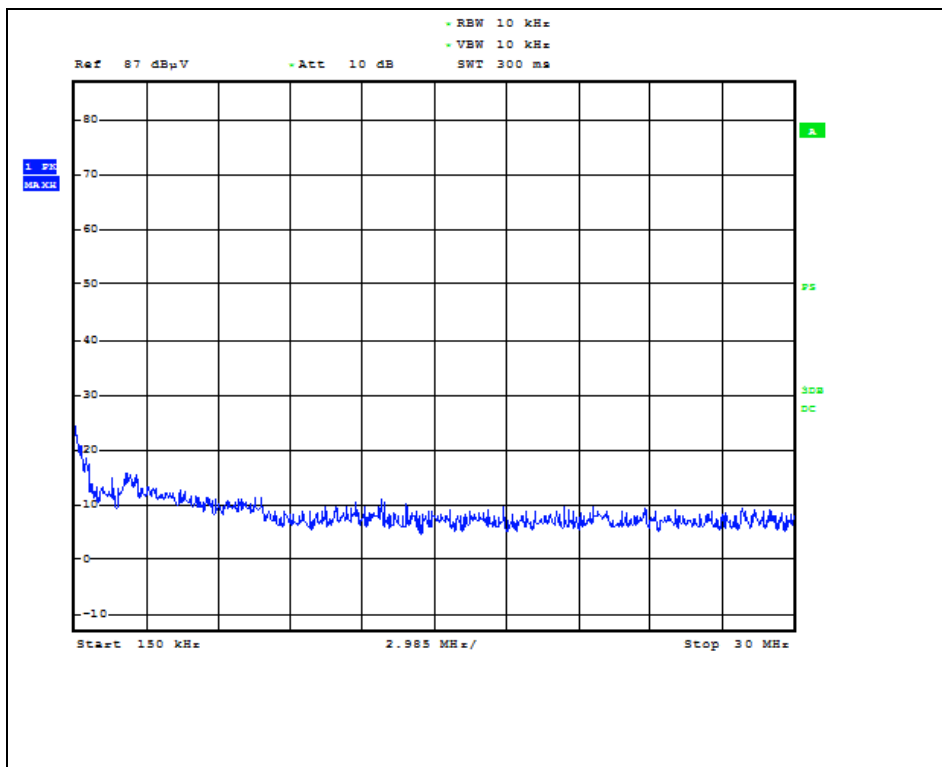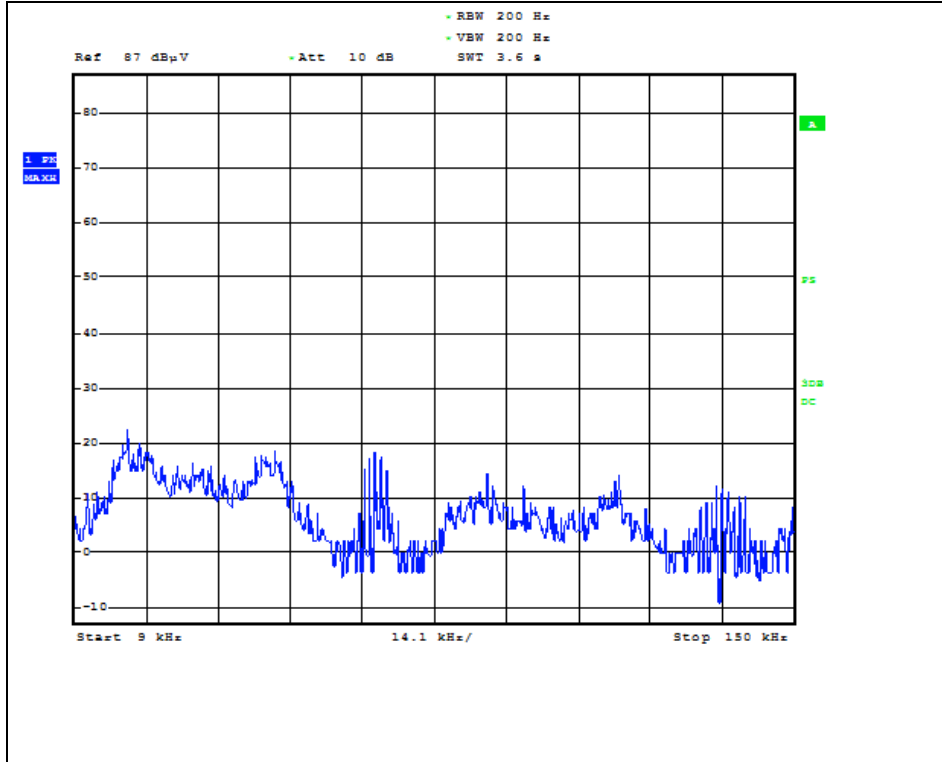


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

Scanning plots from 30 MHz to 1 000 MHz

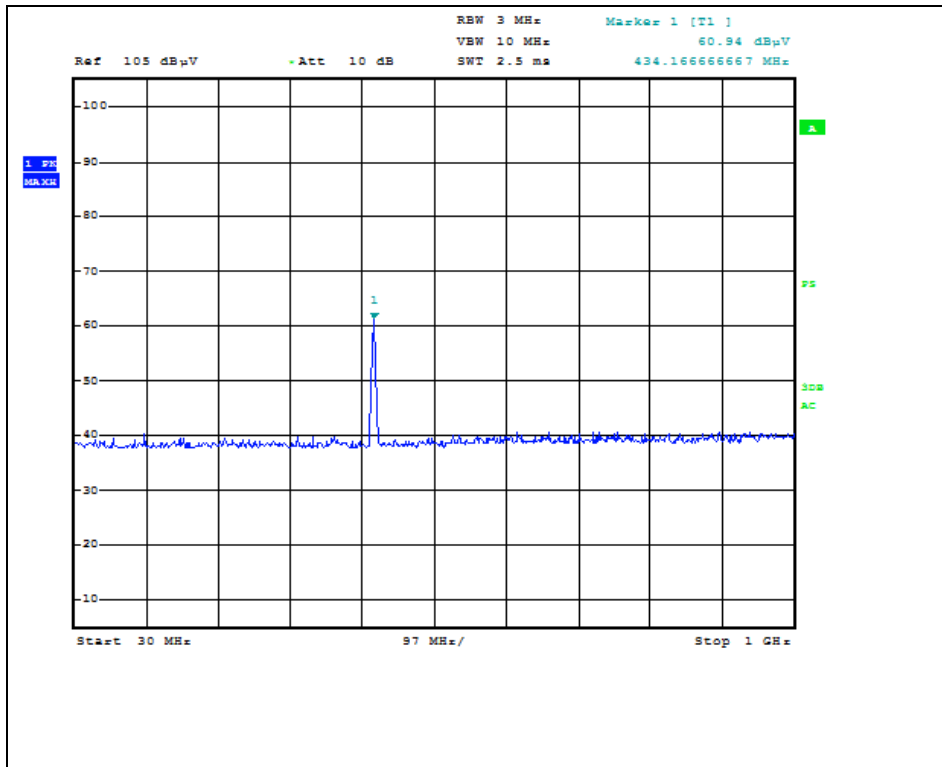

Scanning plots from 1 000 MHz to 4 500 MHz

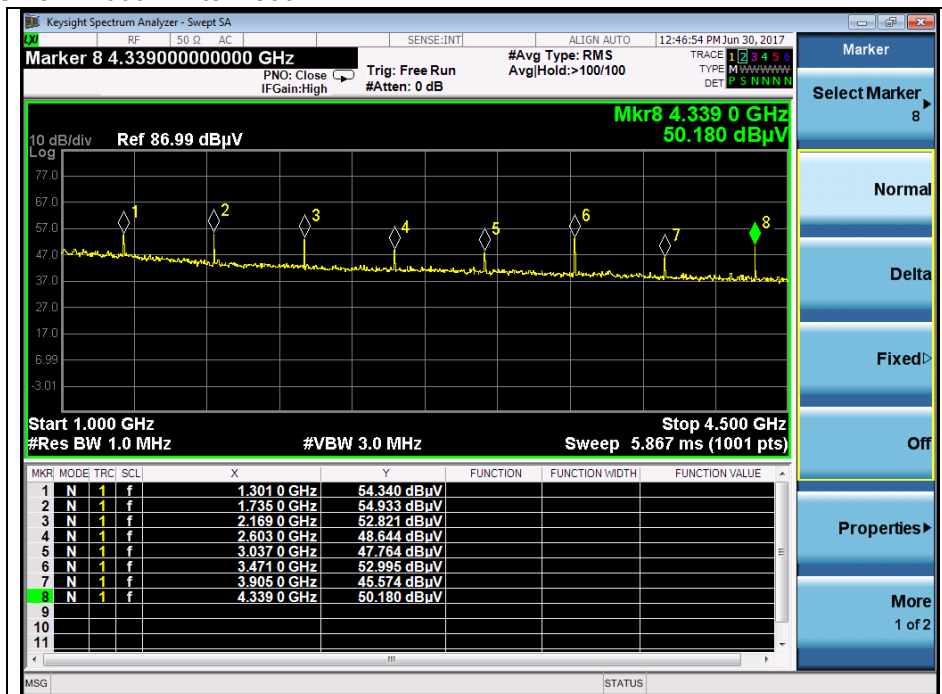

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

3rd Harmonic (Peak)

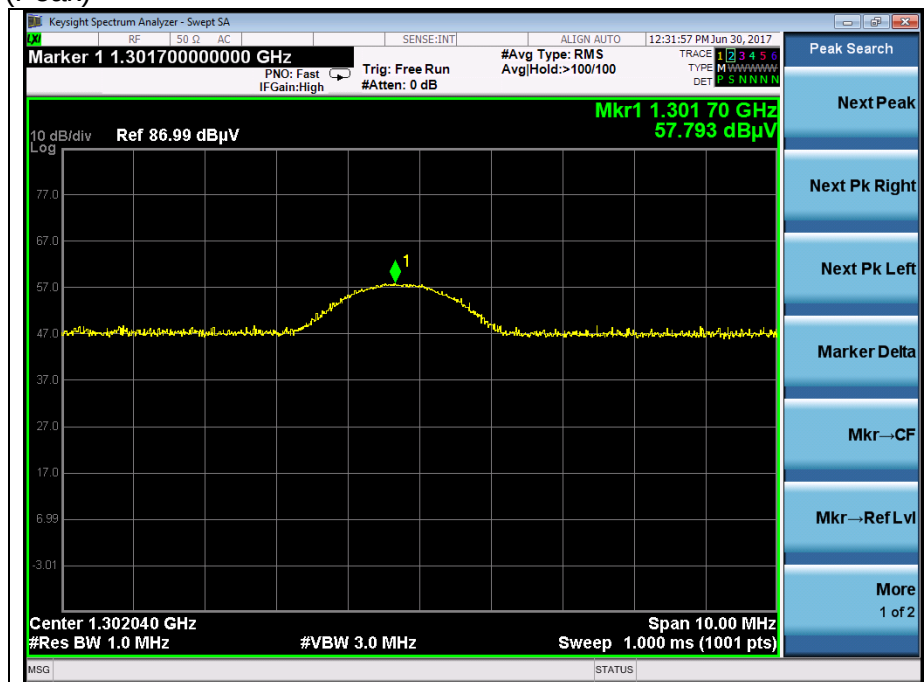

4th Harmonic (Peak)

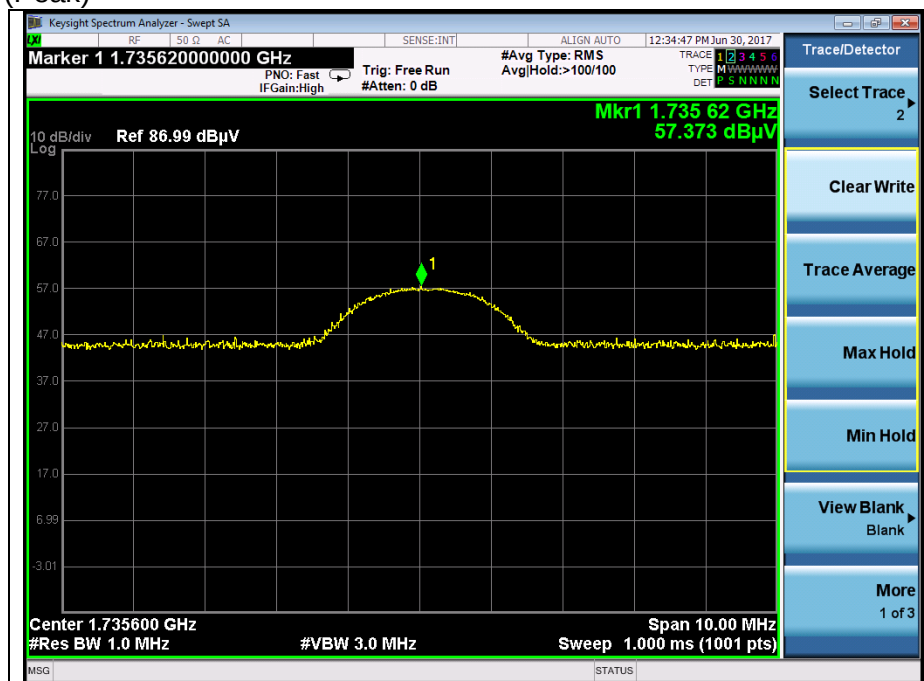

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

5th Harmonic (Peak)

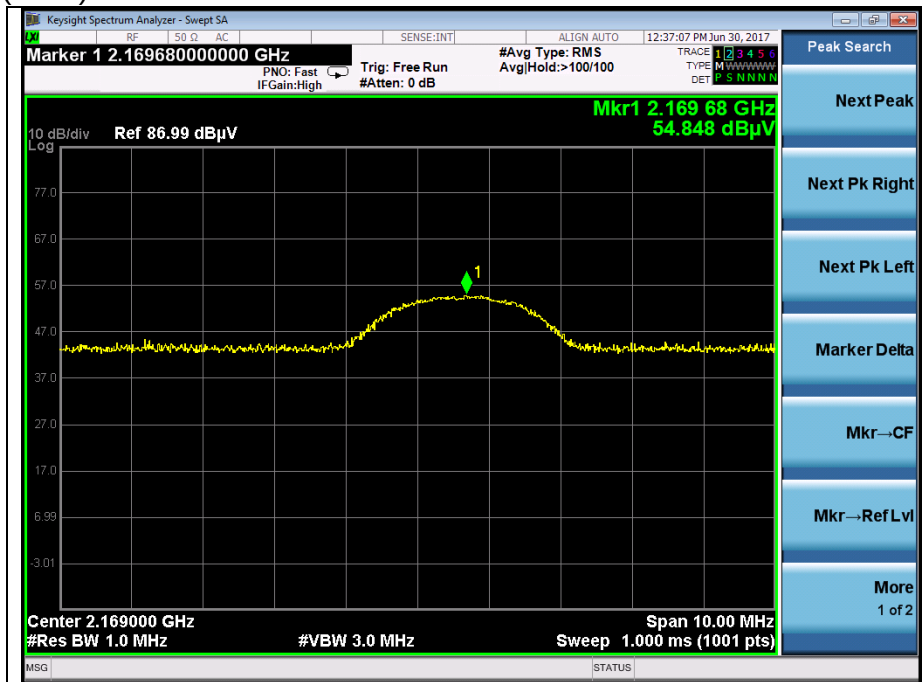

6th Harmonic (Peak)

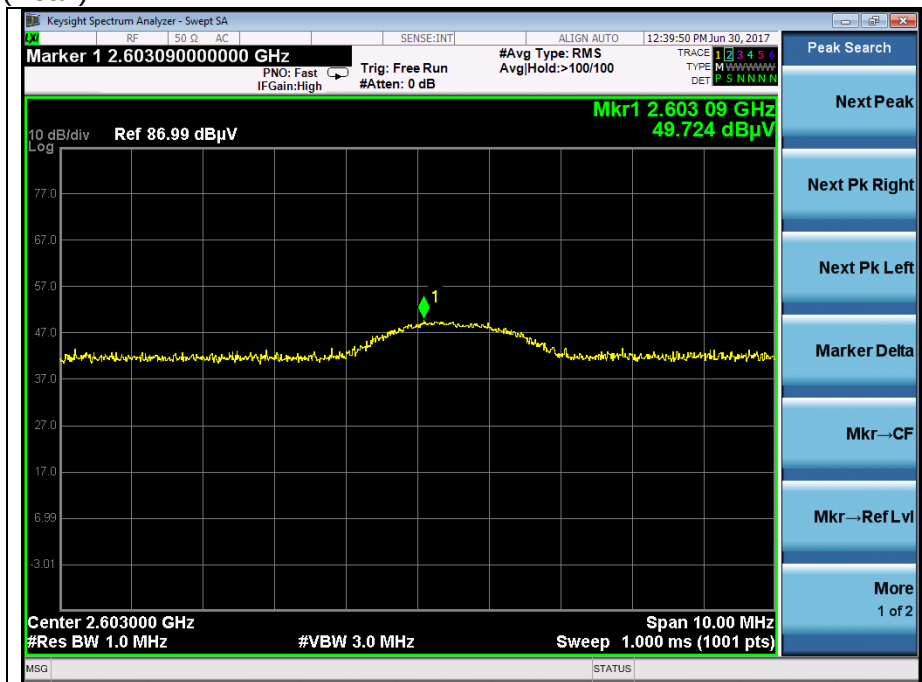

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

7th Harmonic (Peak)



8th Harmonic (Peak)

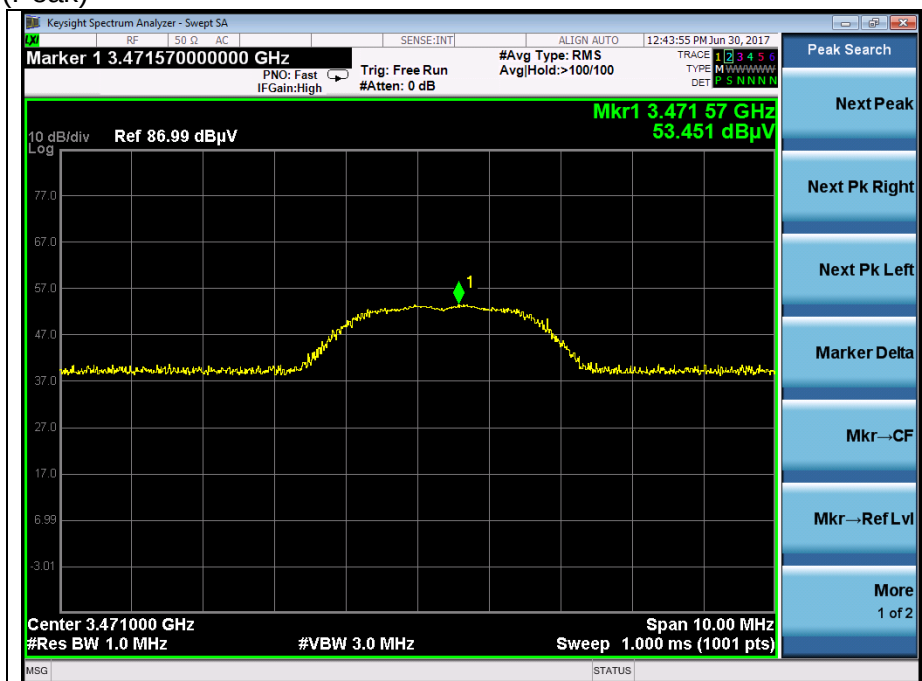

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

9th Harmonic (Peak)

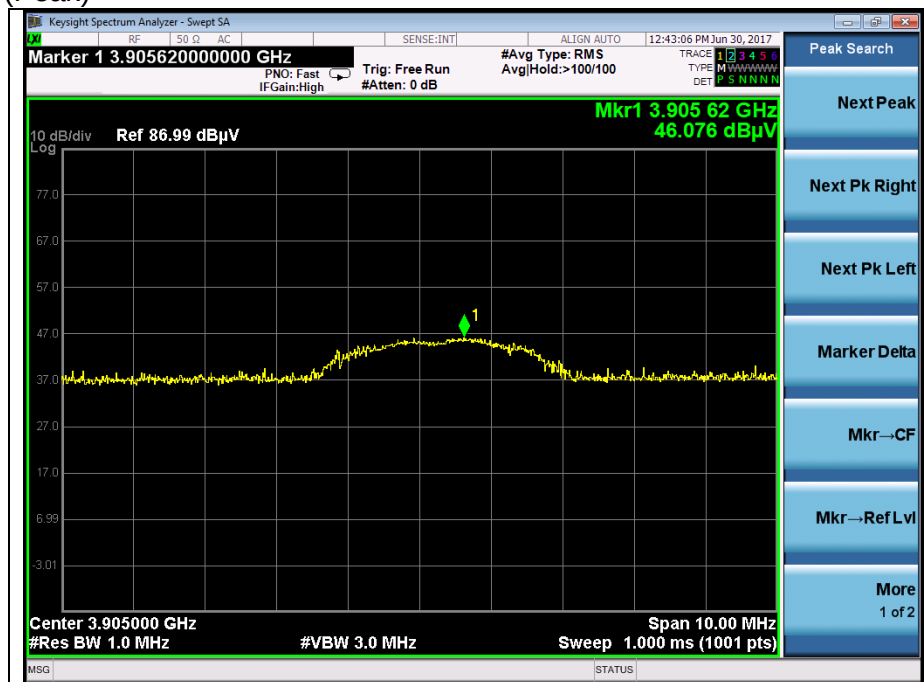

10th Harmonic (Peak)

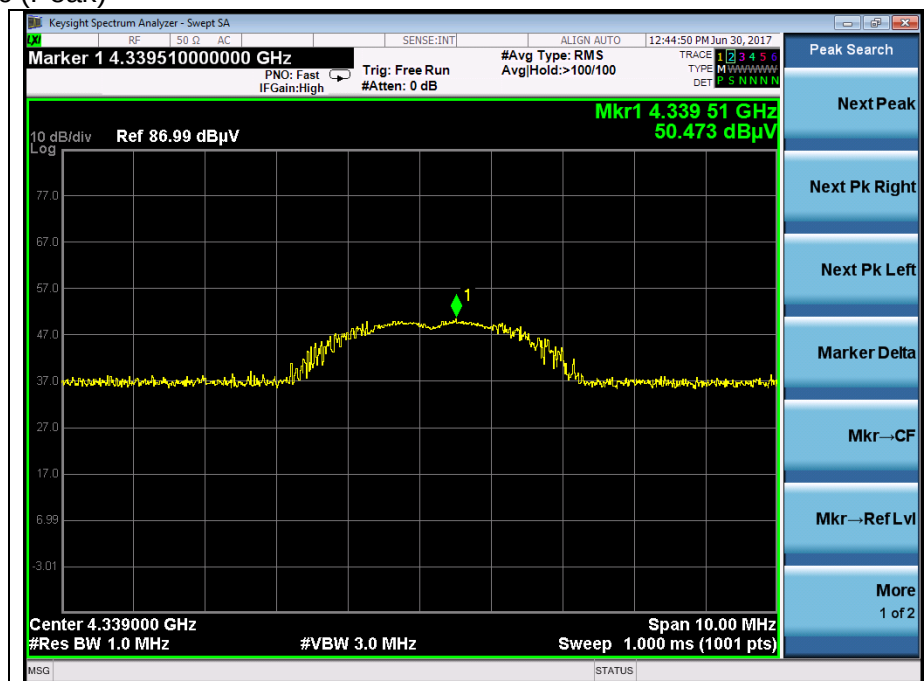

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

3. Bandwidth of Operation Frequency

3.1. Test Setup

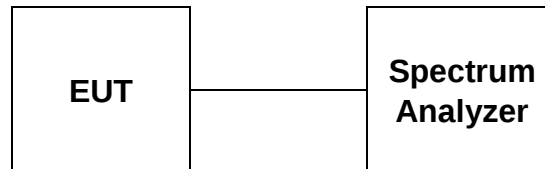

3.2. Limit

According to § 15.231(c), the bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

3.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 10 kHz, VBW = 10 kHz and Span = 1 MHz.
3. The bandwidth of fundamental frequency was measured and recorded.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

3.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Bandwidth of Operation Frequency (kHz)	Limit (kHz)	Remark
433.92	131.70	1 084.80	The point 20 dB down from the modulated carrier

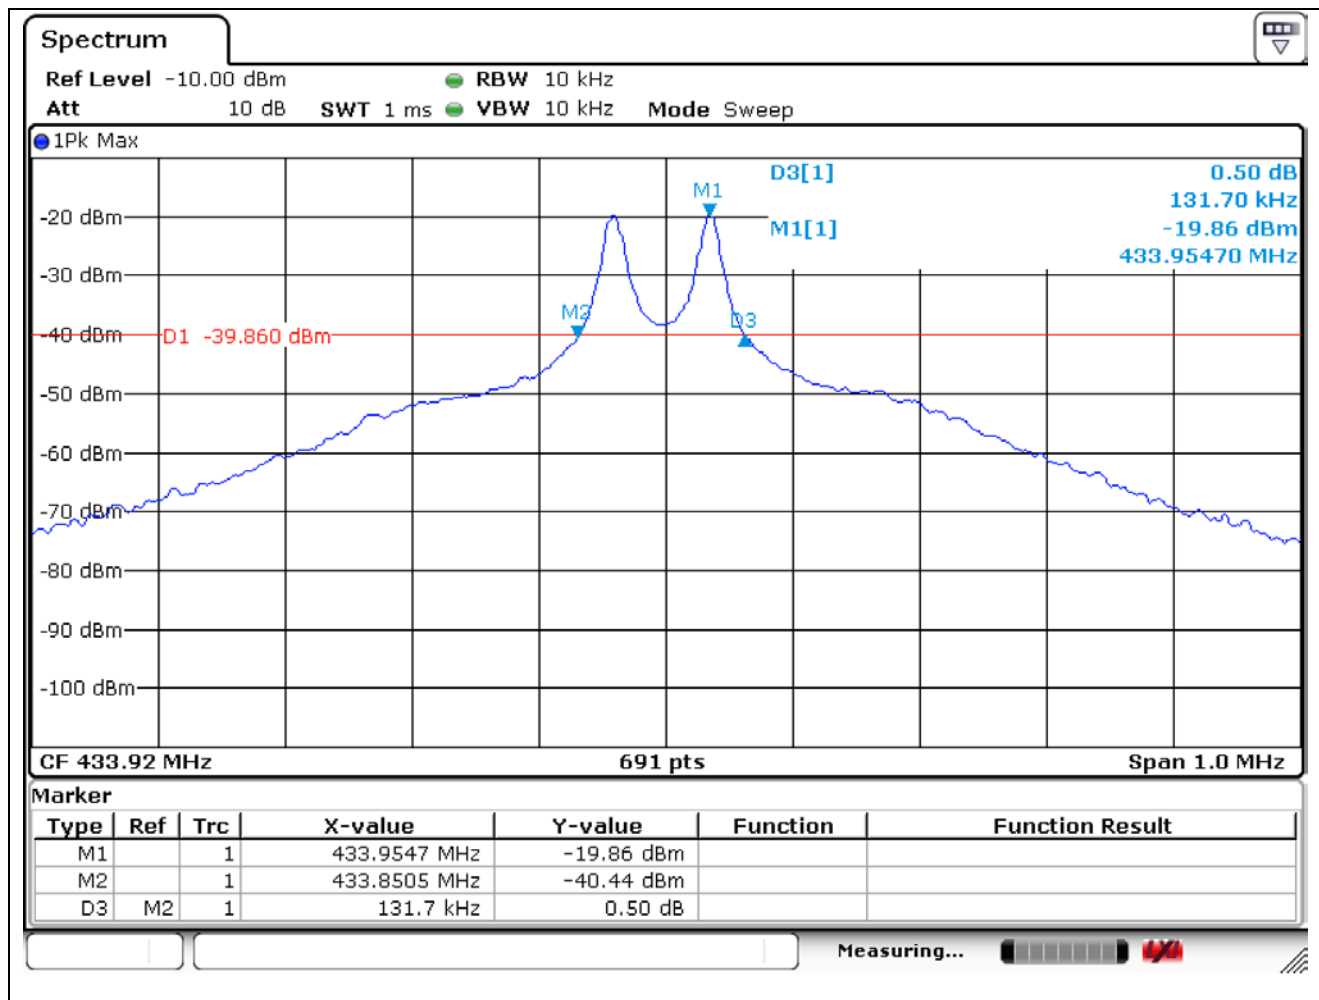


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

4. Occupied Bandwidth

4.1. Test Setup

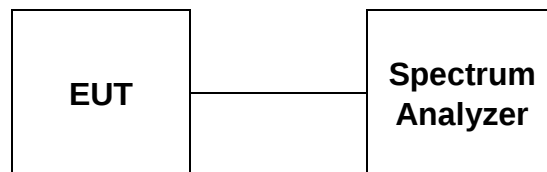

4.2. Limit

According to A.1.3 of RSS-210 Issue 9, the 99 % bandwidth of momentarily operated devices shall be less or equal to 0.25 % of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99 % bandwidth shall be less or equal to 0.5 % of the centre frequency.

4.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 x RBW.
3. The bandwidth of fundamental frequency was measured and recorded.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

4.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Remark
433.92	112.88	1 084.80	99 % Occupied bandwidth

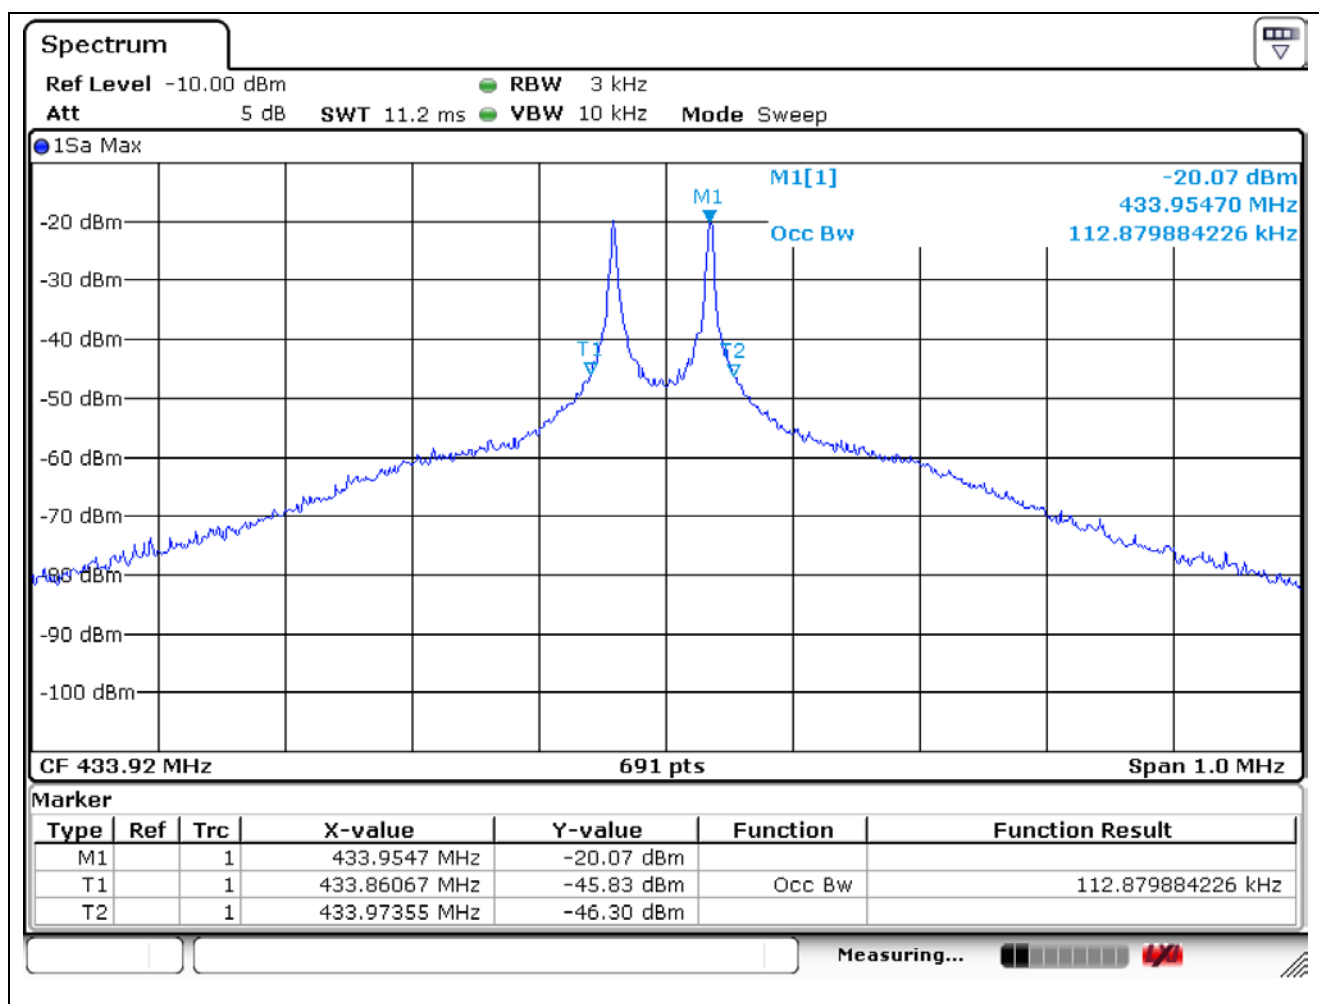


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

5. Transmission Time

5.1. Test Setup

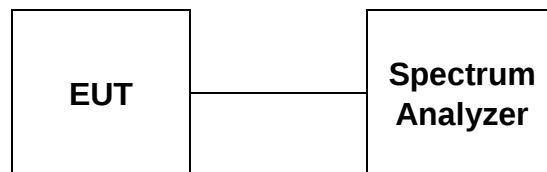

5.2. Limit

5.2.1. FCC Limit

According to § 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.2.2. IC Limit

According to A1.1 (a) of RSS-210 Issue 9, a manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.

5.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 1 MHz, VBW = Auto, Span = 0 Hz, Sweep Time = 10 sec.
3. The bandwidth of fundamental frequency was measured and recorded.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

5.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Transmission Time (sec)	Limit (sec)	Remark
433.92	0.84	Same or less than 5	Pass

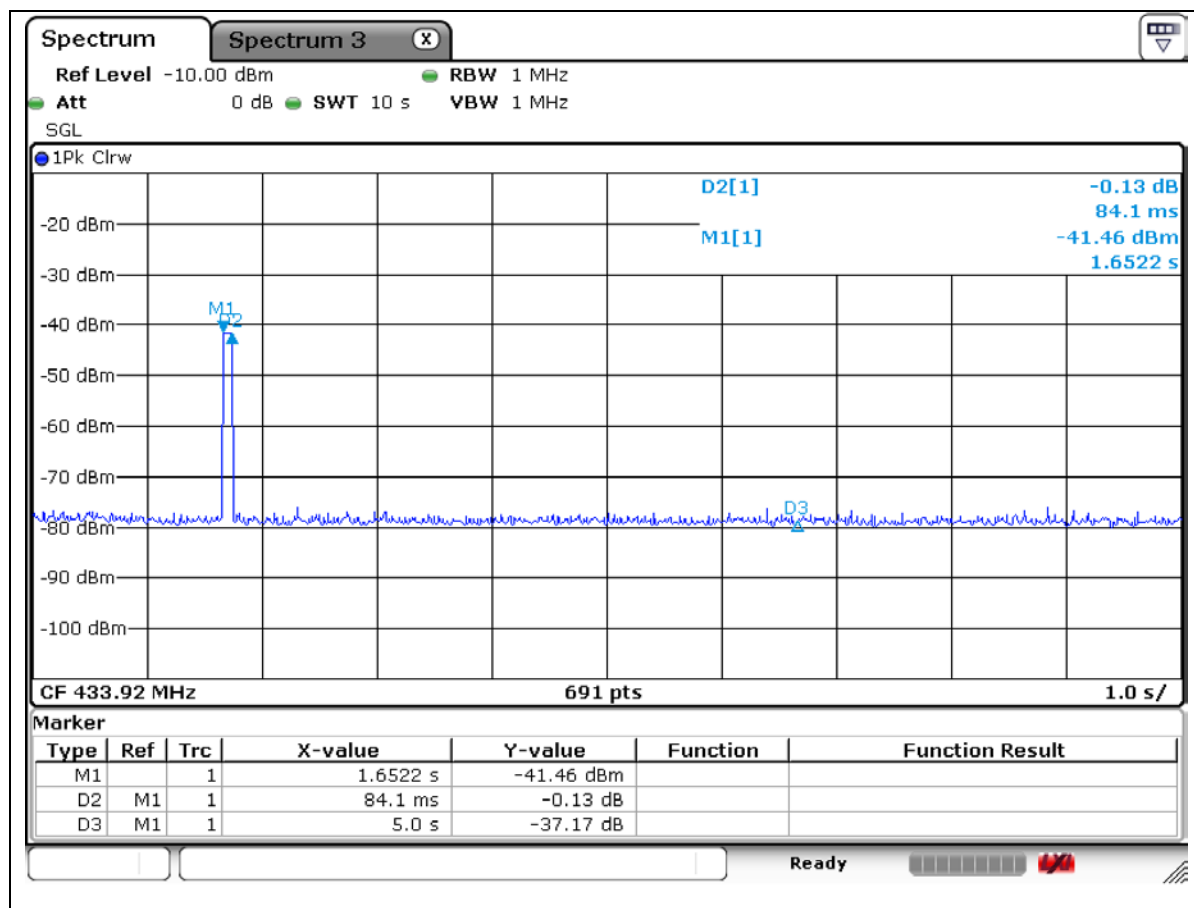


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

6. Duty Cycle Correction Factor

6.1. Test Setup

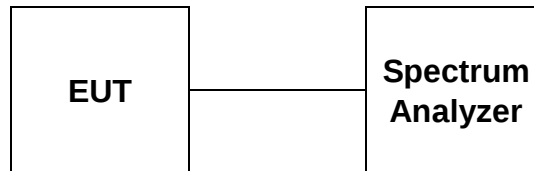

6.2. Limit

None (No dedicated Limit specified in the Rules)

6.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW = 1 MHz, VBW = Auto, Span = 0 Hz, Sweep Time = 1 s.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

6.4. Test Result

Ambient temperature : (23 ± 1) °C

Relative humidity : 47 % R.H.

CALCULATION :

Average Reading = Peak Reading (dB μ V/m) + 20log(Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT.
We measured;

T_{on+off}	T_{on}	$M \% = (T_{on} / T_{on+off}) * 100 \%$	Duty Cycle Correction Factor
100 ms	84.06 ms	0.84	-1.51

$T_{on+off} = 100$ ms

$T_{on} = 84.06$ ms


Duty Cycle Correction Factor = 20log(T_{on} / T_{on+off}) = 20log(0.84) = -1.51

Remark:

- The EUT has only one burst of transmission. Use 100 ms for calculation

6.5. Test Plot

-Duty Cycle of EUT

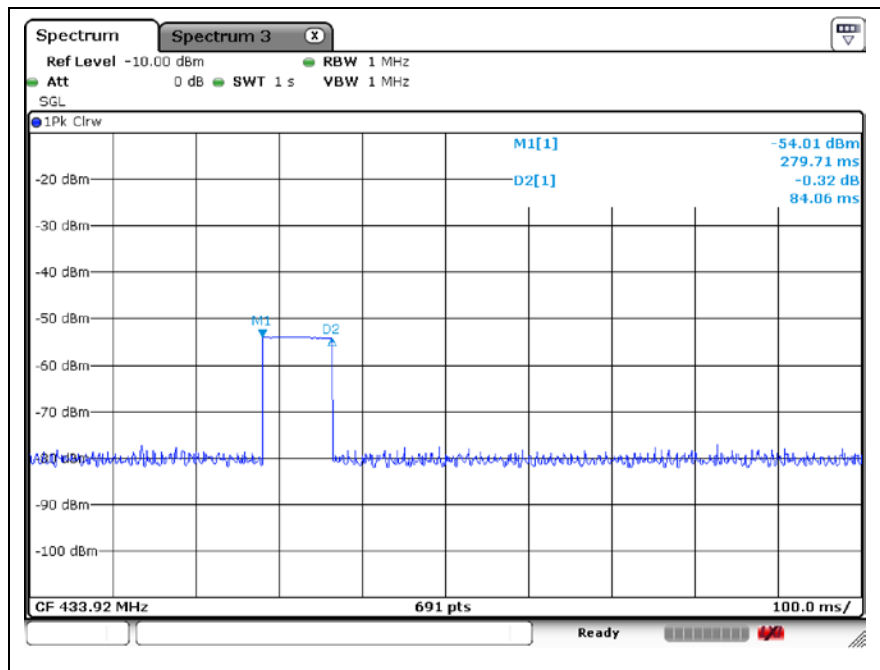

- End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-20(2015.10.01)(3)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)