



FCC COMPLIANCE TEST REPORT

Technical Statement of Conformity
in accordance with 47 CFR Part 15 Subpart C

The product

Equipment Under Test	: Control Box
Model Number	: FAB-110C
Product Series	: N/A
Report Number	: HA181075-RA
Issue Date	: 20-Dec-2018
Test Result	: Compliance

is produced by

Ruoey Lung Enterprise Corp.

No.17, Lu-Kung South 2 Road, Chang-Pin Industrial Park, Lu-Kang, Changhua, Taiwan



HongAn TECHNOLOGY CO., LTD.

NO.15-1, CWEISHUH KENG, CWEIPIN VILLAGE,
LINKOU, TAIPEI COUNTY,
TAIWAN, R. O. C.

TEL: +886-2-26030362

FAX: +886-2-26019259

E-mail: hatlab@ms19.hinet.net

BSMI Registration No.: SL2-IN-E-0023, SL2-A1-E-0023,
SL2-IS-E-0023, SL2-R1-E-0023,
SL2-R2-E-0023, SL2-L1-E-0023

FCC Designation No.: TW1071

TAF Accreditation No.: 1163

VCCI Registration No.: R-2156, C-2329, T-219

Contents

1	General Description	6
1.1	Description of EUT	6
1.2	Test Instruments	7
1.3	Auxiliary Equipments	8
1.4	EUT SETUP	8
1.5	Identifying the Final Test Mode	8
1.6	Final Test Mode	9
1.7	Condition of Power Supply	9
1.8	EUT Configuration	9
1.9	Test Methodology	9
1.10	General Test Procedures	9
1.11	Modification	9
1.12	FCC Part 15.205 restricted bands of operations	10
1.13	Qualification of Test Facility	11
2	Power line Conducted Emission Measurement	12
2.1	Test Instruments	12
2.2	Test Arrangement and Procedure	12
2.3	Limit (§ 15.207)	12
2.4	Test Result	12
3	Radiated Emission Test	15
3.1	Test Instruments	15
3.2	Test Arrangement and Procedure	15
3.3	Limit (§ 15.205 & § 15.209)	16
3.4	Test Result	17
4	Out of Band Emission Test	28
4.1	Test Instruments	28
4.2	Test Arrangement and Procedure	28
4.3	Limit of Field Strength of Fundamental (§ 15.249(d))	28
4.4	Test Result	28
5	20 dB Bandwidth	33
5.1	Test Instruments	33
5.2	Test Arrangement and Procedure	33
5.3	Limit	33
5.4	Test Result	33



6	Antenna requirement	37
6.1	Limit (§ 15.203)	37
6.2	Test Result	37
7	Photographs of the Tests	38
7.1	Radiated Disturbances Emission Test	38
7.2	Conducted Disturbances Emission Test	39
8	Photographs of the EUT	40



Test Result Certification

Applicant : Ruoei Lung Enterprise Corp.

Address of Applicant : No.17, Lu-Kung South 2 Road, Chang-Pin Industrial Park, Lu-Kang, Changhua, Taiwan

Manufacturer : Ruoei Lung Enterprise Corp.

Address of Manufacturer : No.17, Lu-Kung South 2 Road, Chang-Pin Industrial Park, Lu-Kang, Changhua, Taiwan

Trade Name : 

Equipment Under Test : Control Box

Model Number : FAB-110C

Product Series : N/A

FCC ID : TRUCB-PERSEUS

Filing Type : Certification

Sample Received Date : 25-Oct-2018

Test Standard :

☒ FCC Part 15 Subpart C §15.249


Deviations from standard test methods & any other specifications : NONE

Remark:

1. This report details the results of the test carried out on one sample.
2. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in both ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.203, 15.207, 15.209, 15.249.
3. This report applies to the above sample only and shall not be reproduced in part without written approval of HongAn Technology Co., Ltd.

Documented by: 
Kay Wang/ ADM. Dept Staff

2018-12-18

Tested by: 
Eason Hsieh / ENG. Dept. Staff

2018-11-06

Approved by: 
Peter Chin / Section Manager

Date: 2018-12-20



Summary of Test Result

	Test Item	Applicable Standard	Test Result
1	Antenna Requirement	FCC part 15 subpart C §203	Compliance
2	Conducted Emission	FCC part 15 subpart C §207	Compliance
3	Restricted Band of Operation	FCC part 15 subpart C §205	Compliance
4	Radiated Emission	FCC part 15 subpart C §209	Compliance
5	Field Strength	FCC part 15 subpart C §249(a)	Compliance
6	Out of Band Emission	FCC part 15 subpart C §249(d)	Compliance
7	20dB Bandwidth	FCC part 15 subpart C §215(c)	Compliance

1 General Description

1.1 Description of EUT

Equipment Under Test	:	Control Box									
Model Number of EUT	:	FAB-110C									
Product Series	:	N/A									
Power Supply	:	Input: 100-120Vac, 50/60Hz, 2A; Output: 29Vdc, 2.5A Power Cord: 2 Pin ☐Shielded ☒Non-Shielded ☐Detachable, m ☒Un-Detachable, 2m ☐w Ferrite Core ☒w/o Ferrite Core									
Frequency Range	:	2402~2480 MHz									
Number of Channels	:	40 Channels									
Carrier Frequency of Each Channel	:	00 2402 10 2422 20 2442 30 2462	01 2404 11 2424 21 2444 31 2464	02 2406 12 2426 22 2446 32 2466	03 2408 13 2428 23 2448 33 2468	04 2410 14 2430 24 2450 34 2470	05 2412 15 2432 25 2452 35 2472	06 2414 16 2434 26 2454 36 2474	07 2416 17 2436 27 2456 37 2476	08 2418 18 2438 28 2458 38 2478	09 2420 19 2440 29 2460 39 2480
Antenna Specification	:	PCB Antenna/ Gain: -4.9 dBi									
Modulation Technique	:	Bluetooth 4.0 BLE Bluetooth : GFSK									
Transmit Data Rate	:	Bluetooth : 1Mbps									
Specification	:	Dimensions : 325 mm (L) X 92 mm (W) X 57 mm (H) Weight : 650 g Function : The EUT is a control box incorporated Bluetooth module to control actuator operation, massage operation and LED lighting. ※For more detail specification, please refer to the User Manual.									

1.2 Test Instruments

HA2

Instrument Name	Manufacturer Mode	Model Number	Serial Number	Last Cal. Date	Next Cal. Date
RF Amplifier	Schaffner	CPA9231A	0405	24-Aug-2018	23-Aug-2019
EMI Receiver	R&S	ESCI	100931	09-Aug-2018	08-Aug-2019
Spectrum Analyzer	R&S	FSV	101629	16-Jan-2018	15-Jan-2019
Preamplifier	HD	HD17187	004	21-May-2018	20-May-2019
Bilog Antenna	TESEQ	CBL6111D	38521	03-Oct-2018	02-Oct-2019
Double-Ridged Waveguide Horn	EMCO	3115	9912-5992	23-May-2018	22-May-2019
Horn Antenna (18-40GHz)	Com -Power	AH-840	101042	22-May-2018	21-May-2019
Microwave Preamplifier	Com -Power	PAM-840	461269	21-May-2018	20-May-2019
LISN	Rolf Heine Hochfrequenztechnik	NNB-4/32T	00001	01-Mar-2018	28-Feb-2019
Active Loop Antenna	EMCO	6502	9202-2717	27-Aug-2018	26-Aug-2019
Coaxial Cable	n/a	8D-FB	HA2-10MSI TE-01	24-Aug-2018	23-Aug-2019
Microflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3368/2	21-May-2018	20-May-2019
Microflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3367/2	22-May-2018	21-May-2019
Coaxial Cable	n/a	RG 223/U	HA2-CE-01	24-Aug-2018	23-Aug-2019

※ The test equipments used are calibrated and can be traced to National ITRI and International Standards.

1.3 Auxiliary Equipments


1.3.1. Provided by HongAn Technology Co., Ltd. for RF Test.

No.	Equipment	Model No.	Serial No.	EMC Approved	Brand	Description	
						Data Cable	Power Cable
01	NoteBook	N61J	N61JV-021A520M	CE,FCC, C-TICK N13219, BSMI R31018	ASUS	--	Adapter to Notebook Unshielded*1.8 m AC to Adapter Unshielded*1.8 m

1.3.2. Provided by the Manufacturer

No.	Equipment	Model No.	Serial No.	EMC Approved	Brand	Description	
						Data Cable	Power Cable
1	Control Cable	--	--	--	--	1.8 m	--

1.4 EUT SETUP

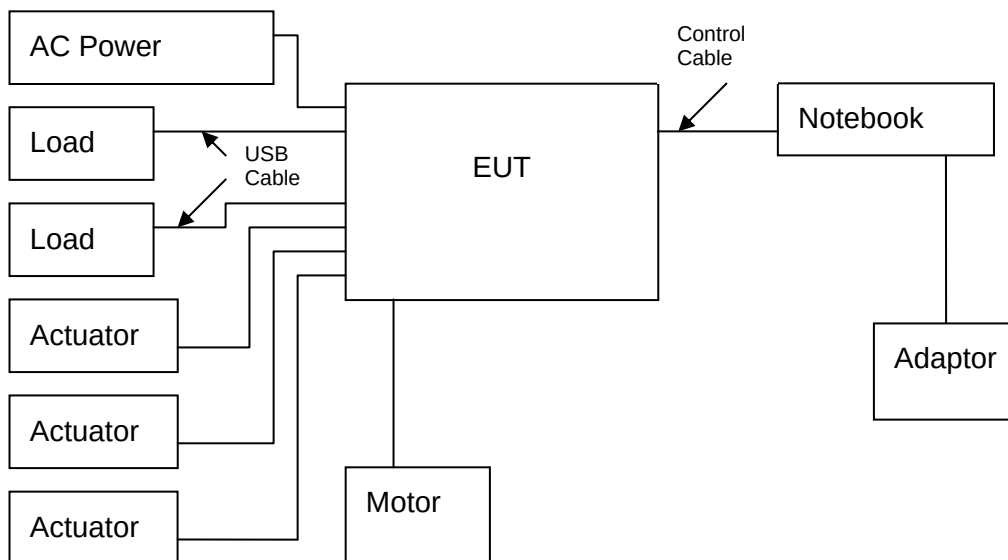

Note: Main Test Sample: FAB-110C

1.5 Identifying the Final Test Mode

1. Mode 1: TX BT BLE mode (1Mbps) CH 00.
2. Mode 2: TX BT BLE mode (1Mbps) CH 20.
3. Mode 3: TX BT BLE mode (1Mbps) CH 39.

Note :

1. After pre-test, we identified that the TX (Packet type DH5 and X axis) was most likely to cause maximum disturbance. Therefore, the Final Assessment was performed for the worst case.
2. The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.
3. Channel Low (2402 MHz), Mid (2442 MHz) and High (2480 MHz) were chosen for full testing.
4. According to its specifications, the EUT must comply with the requirements of the Section 15.203,



15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

5. Test Software: nRFgo Studio.exe v1.21.2.10; RF parameter: Payload model: PRBS9/ Payload length: 32 bytes.

1.6 Final Test Mode

Conducted Emission: Mode 3.

Field Strength: All Mode.

Radiated Emission (30~1000 MHz): Mode 3.

Radiated Emission (1~26.5GHz): All Mode.

1.7 Condition of Power Supply

120V AC

1.8 EUT Configuration

1. Setup the EUT as shown in Sec.1.4 Block Diagram.
2. Turn on the power of all equipments.
3. Activate the selected Final Test Mode.

1.9 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10 (2013) and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.203, 15.207, 15.209 and 15.249.

1.10 General Test Procedures

Conducted Emissions

The EUT is set according to the requirements in Section 6.2 of ANSI C63.10 (2013).

Radiated Emissions

The EUT is set according to the requirements in Section 6.3 of ANSI C63.10 (2013).

1.11 Modification

N/A

1.12 FCC Part 15.205 restricted bands of operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37635-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



1.13 Qualification of Test Facility

BSMI Certificate No. : SL2-IS-E-0023, SL2-IN-E-0023, SL2-R1-E-0023, SL2-R2-E-0023,
SL2-A1-E-0023, SL2-L1-E-0023.

FCC Designation No. : TW1071

TAF Accreditation No. : 1163

VCCI Certificate No. : R-2156, C-2329, T-219

2 Power line Conducted Emission Measurement

2.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

2.2 Test Arrangement and Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

2.3 Limit (§ 15.207)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency (MHz)	Limits (dBuV)	
	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

2.4 Test Result

Compliance

The final test data are shown on the following page(s).


**Conducted Emission Test Data**

Test Date : 2018-11-06

Power Line : Line

Temperature : 24.3°C

Humidity : 38%

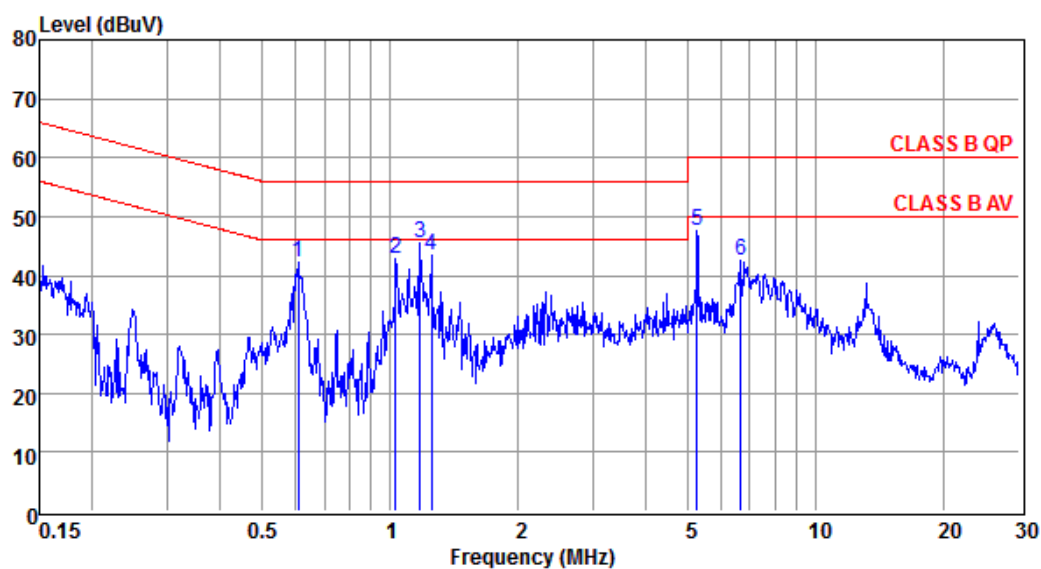


Freq	Read	C.F	Result	Limit	Margin	Remark	Phase
MHz	dBuV	dB	dBuV	dBuV	dB		
0.608	41.92	0.17	42.09	46.00	-3.91	Peak	LINE
1.032	42.52	0.21	42.73	46.00	-3.27	Peak	LINE
1.178	45.34	0.23	45.57	46.00	-0.43	Peak	LINE
1.249	43.30	0.23	43.53	46.00	-2.47	Peak	LINE
5.249	47.15	0.48	47.63	50.00	-2.37	Peak	LINE
6.662	41.97	0.55	42.52	50.00	-7.48	Peak	LINE

Note1: C.F (Correction Factor) = Insertion loss + Cable loss

Note2: Margin = Result - Limit

Conducted Emission Test Data

Test Date	: 2018-11-06	Power Line	: Neutral
Temperature	: 24.3°C	Humidity	: 38%

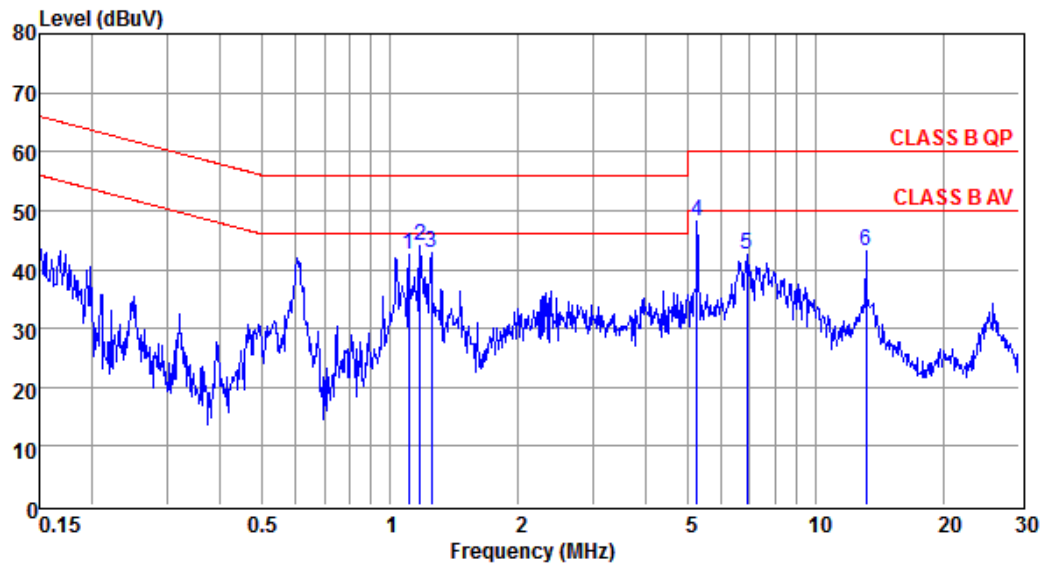

Freq	Read	C.F	Result	Limit	Margin	Remark	Phase
MHz	dBuV	dB	dBuV	dBuV	dB		
1.106	42.32	0.19	42.51	46.00	-3.49	Peak	NEUTRAL
1.178	43.91	0.21	44.12	46.00	-1.88	Peak	NEUTRAL
1.249	42.76	0.21	42.97	46.00	-3.03	Peak	NEUTRAL
5.249	47.68	0.45	48.13	50.00	-1.87	Peak	NEUTRAL
6.878	41.98	0.51	42.49	50.00	-7.51	Peak	NEUTRAL
13.127	42.50	0.71	43.21	50.00	-6.79	Peak	NEUTRAL

Note1: C.F (Correction Factor) = Insertion loss + Cable loss

Note2: Margin = Result - Limit





3 Radiated Emission Test

3.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

3.2 Test Arrangement and Procedure

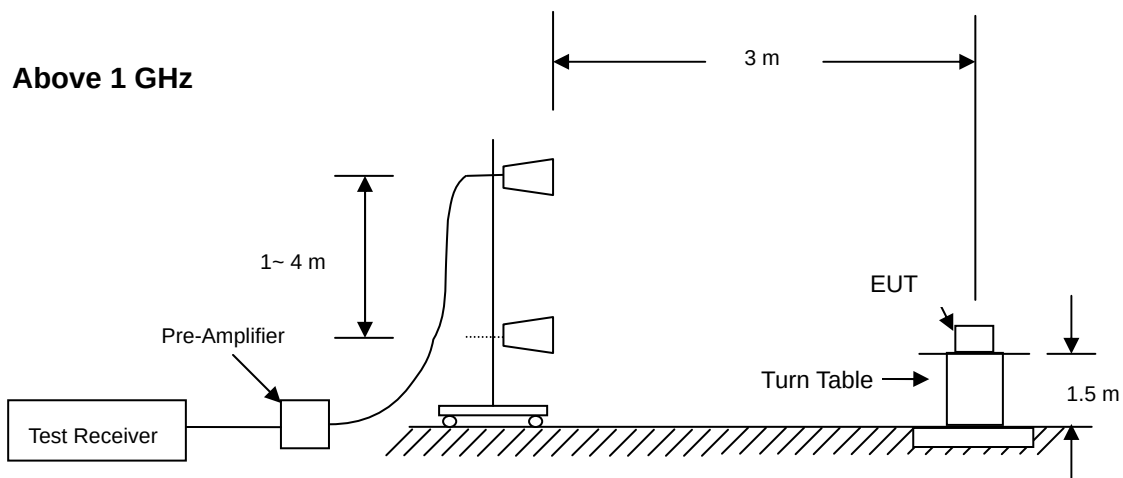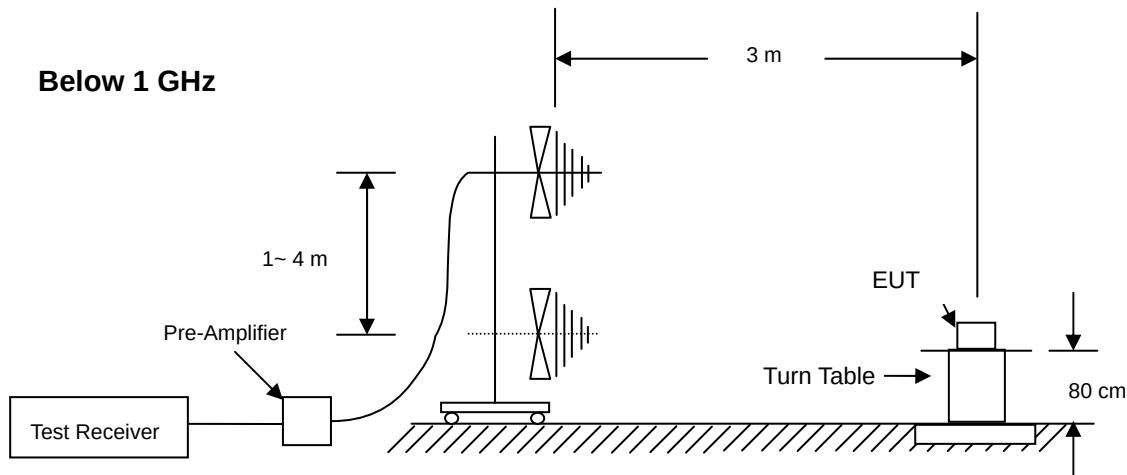

1. The EUT is placed on a turntable, which is 0.8 m (below 1GHz) and 1.5m (above 1GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
 - (a) Below 1 GHz: RBW =100 kHz/ VBW = 1 MHz/ Sweep = AUTO.



(b) Above 1 GHz: Peak: RBW = VBW = 1MHz/ Sweep = AUTO; Average: RBW = 1MHz/ VBW = 10Hz/ Sweep = AUTO.

7. Repeat above procedures until the measurements for all frequencies are complete.

3.3 Limit (§ 15.205 & § 15.209)

3.3.1 Limit of Restricted Band of Operation (§ 15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

3.3.2 Limit of Spurious Emission (§ 15.209)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is lesser attenuation.

Frequency (MHz)	Field strength (microvolts/ meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.


3.4 Test Result

Compliance

The final test data are shown on the following page(s).

Radiated Emission Test Data (Field Strength of Fundamental)

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00, 20, 39
EUT Position	: Horizontal		

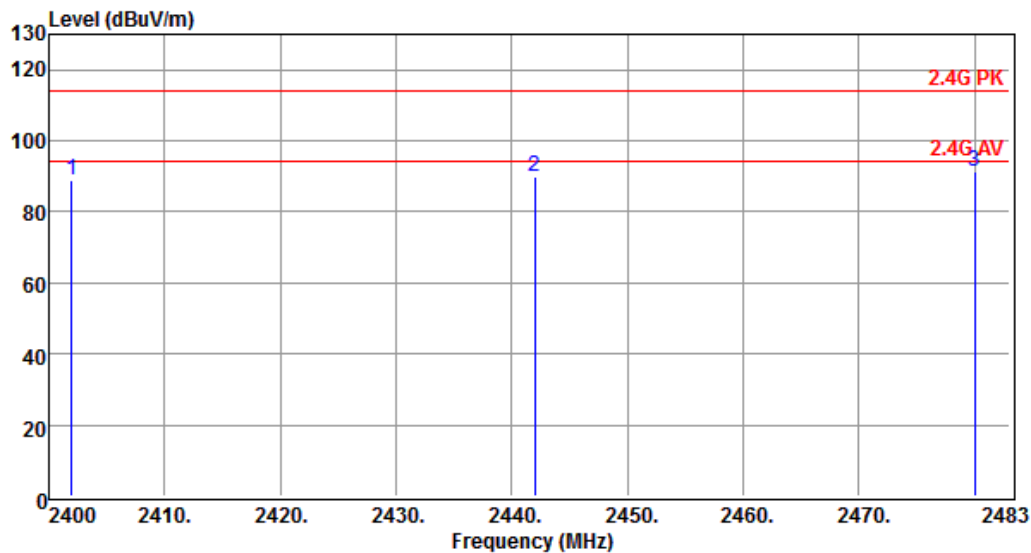

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2402.000	95.05	-6.02	89.03	94.00	-4.97			VERTICAL	Peak
2442.000	95.97	-5.89	90.08	94.00	-3.92			VERTICAL	Peak
2480.000	97.17	-5.79	91.38	94.00	-2.62			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Remark :


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:

Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 3MHz, VBW =10MHz, Sweep = AUTO.

Note: Because the 20 dB Bandwidth is over 1MHz, the RBW setting of measuring Field strength of Fundamental should be 3MHz, and VBW should be at 10 MHz.

**Radiated Emission Test Data (Field Strength of Fundamental)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00, 20, 39
EUT Position	: Horizontal		

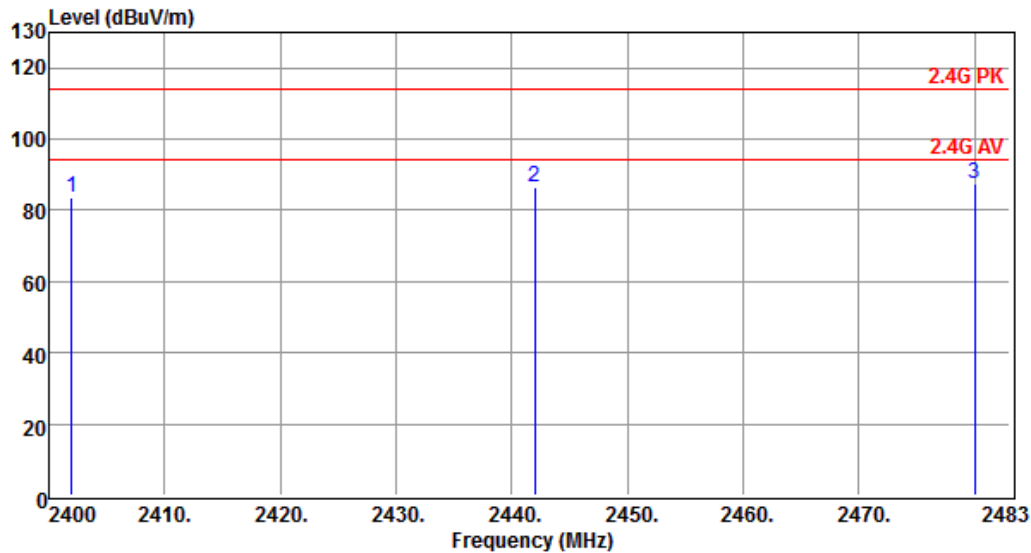

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2402.000	89.86	-6.02	83.84	94.00	-10.16			HORIZONTAL	Peak
2442.000	92.59	-5.89	86.70	94.00	-7.30			HORIZONTAL	Peak
2480.000	93.26	-5.79	87.47	94.00	-6.53			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Remark :


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:

Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 3MHz, VBW =10MHz, Sweep = AUTO.

Note: Because the 20 dB Bandwidth is over 1MHz, the RBW setting of measuring Field strength of Fundamental should be 3MHz, and VBW should be at 10 MHz.

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39
EUT Position	: Horizontal		

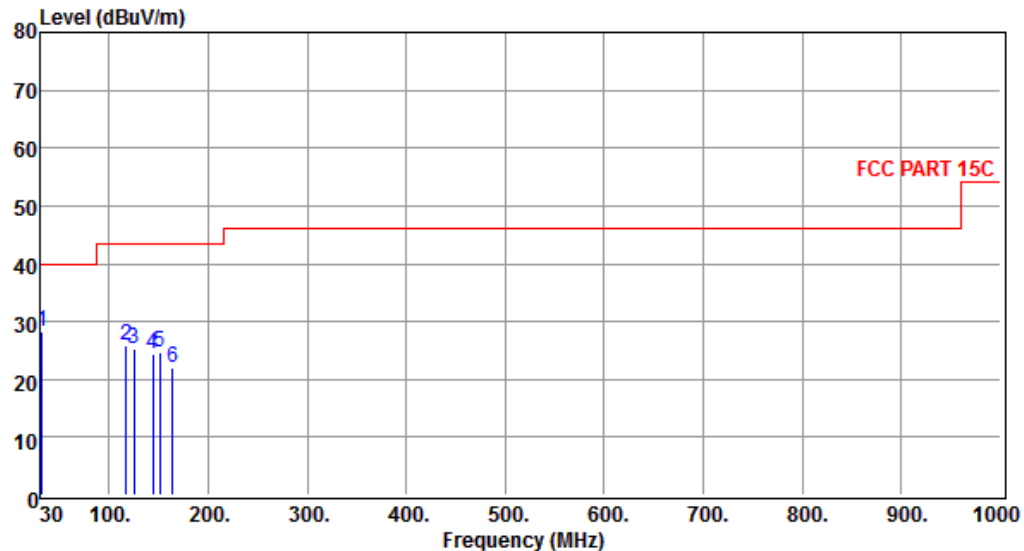

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
31.940	33.93	-5.75	28.18	40.00	-11.82	---	---	VERTICAL	Peak
117.300	37.65	-11.76	25.89	43.50	-17.61	---	---	VERTICAL	Peak
125.060	36.88	-11.58	25.30	43.50	-18.20	---	---	VERTICAL	Peak
144.460	36.17	-11.72	24.45	43.50	-19.05	---	---	VERTICAL	Peak
151.250	36.55	-12.00	24.55	43.50	-18.95	---	---	VERTICAL	Peak
163.860	34.70	-12.84	21.86	43.50	-21.64	---	---	VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39
EUT Position	: Horizontal		

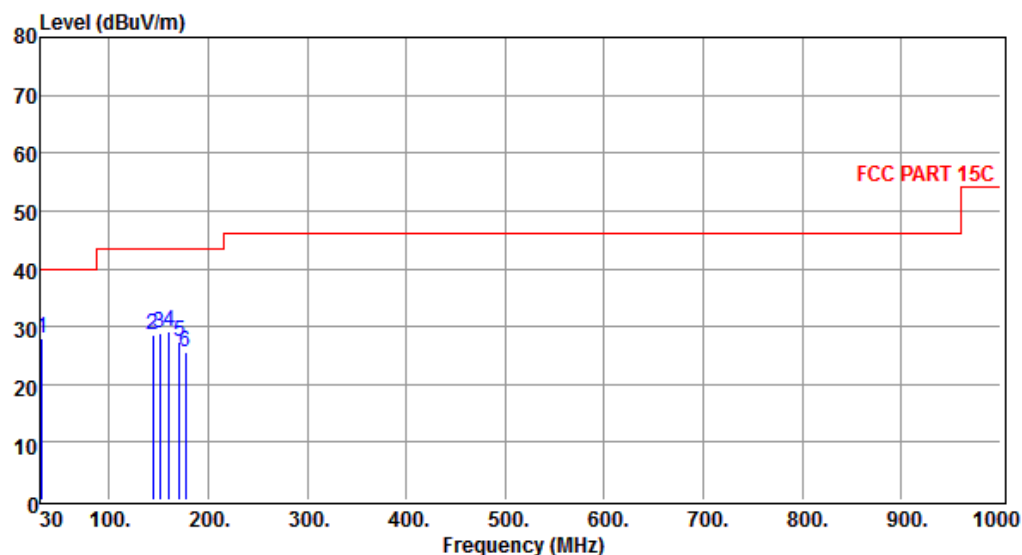

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
31.940	33.76	-5.75	28.01	40.00	-11.99	---	---	HORIZONTAL	Peak
144.460	40.28	-11.72	28.56	43.50	-14.94	---	---	HORIZONTAL	Peak
151.250	40.91	-12.00	28.91	43.50	-14.59	---	---	HORIZONTAL	Peak
160.950	41.68	-12.67	29.01	43.50	-14.49	---	---	HORIZONTAL	Peak
170.650	40.48	-13.24	27.24	43.50	-16.26	---	---	HORIZONTAL	Peak
177.440	39.29	-13.83	25.46	43.50	-18.04	---	---	HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00 (2402MHz)
EUT Position	: Horizontal		

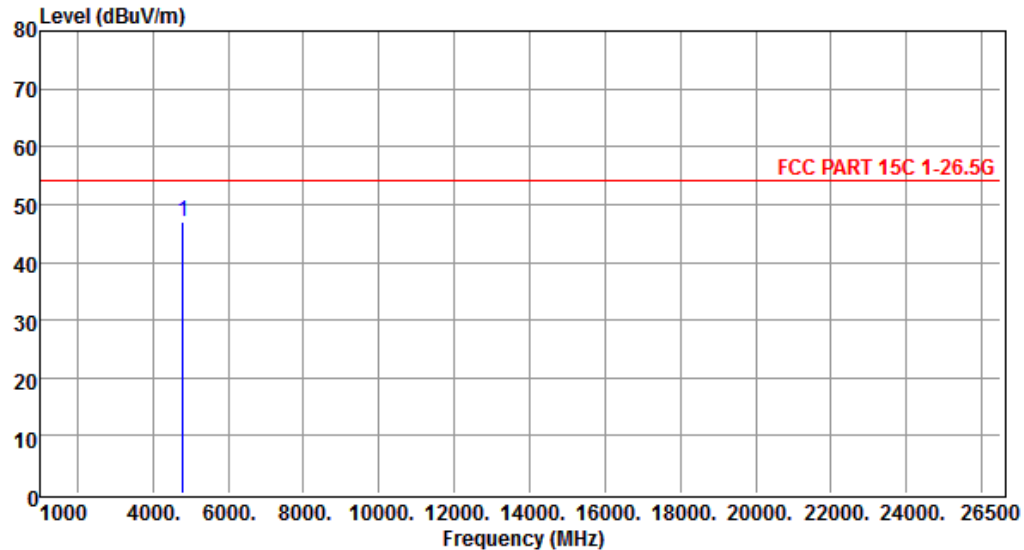

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	43.84	3.09	46.93	54.00	-7.07			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00 (2402MHz)
EUT Position	: Horizontal		

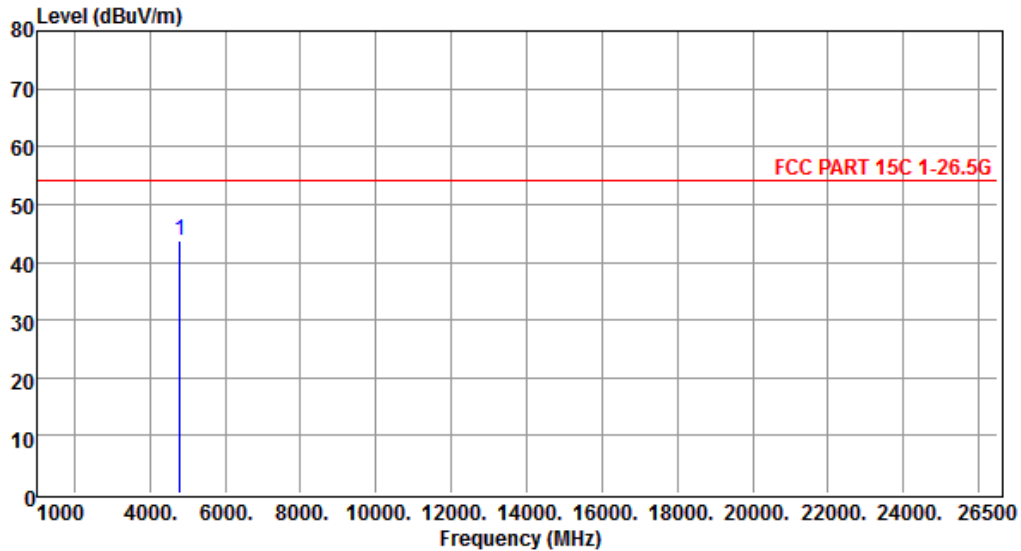

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	40.60	3.09	43.69	54.00	-10.31			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH20 (2442MHz)
EUT Position	: Horizontal		

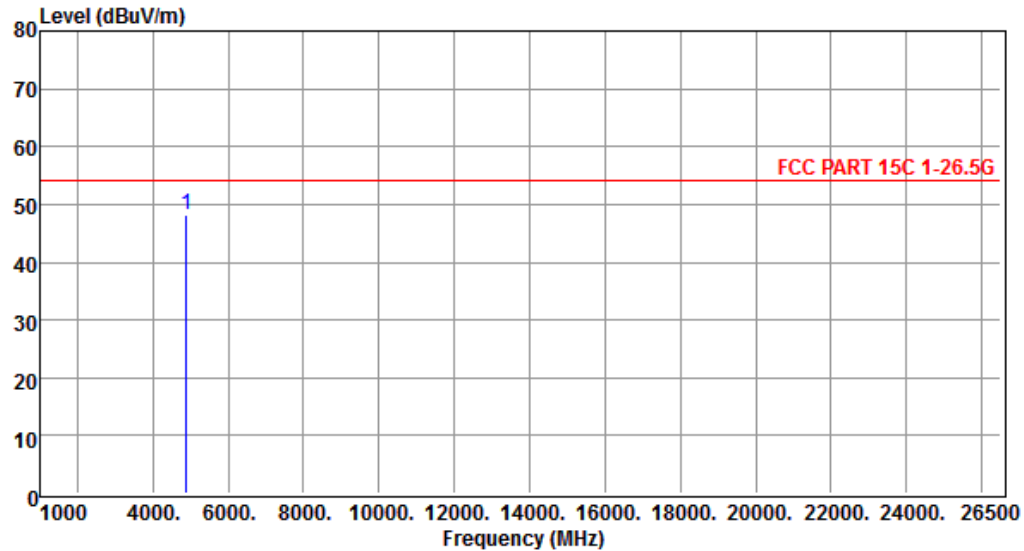

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4884.000	44.92	3.30	48.22	54.00	-5.78			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH20 (2442MHz)
EUT Position	: Horizontal		

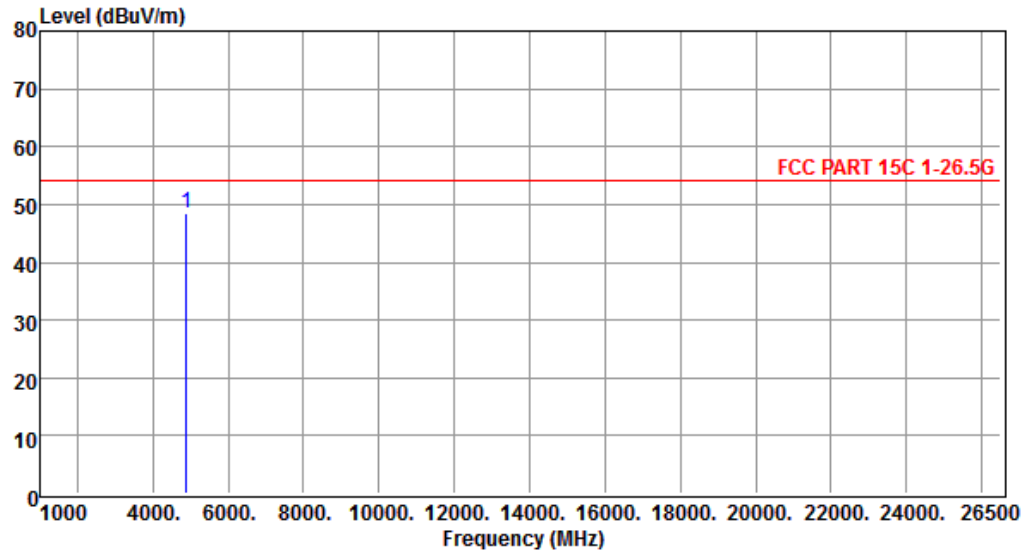

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4884.000	45.10	3.30	48.40	54.00	-5.60			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39 (2480MHz)
EUT Position	: Horizontal		

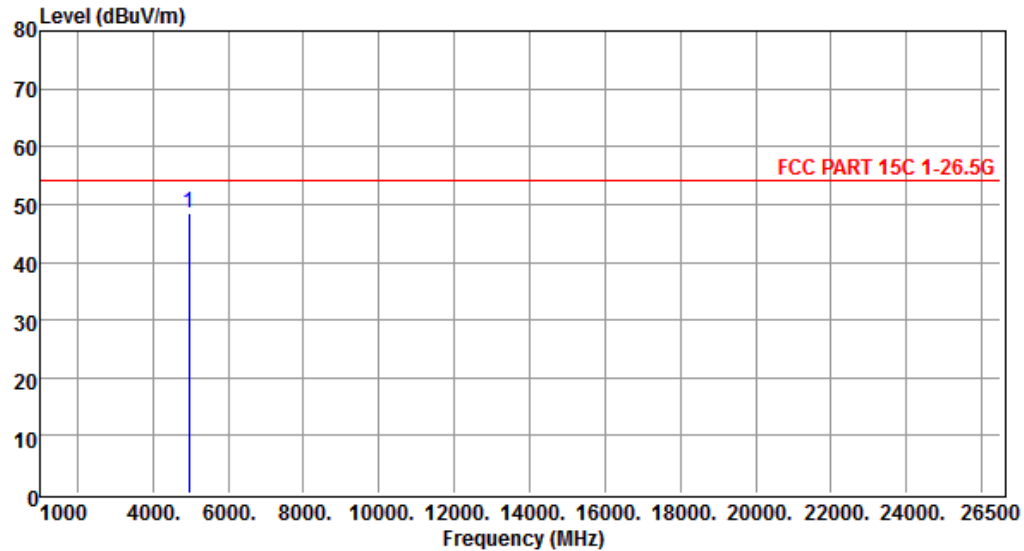

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	45.00	3.50	48.50	54.00	-5.50			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above 1G and Field Strength to 10th Harmonic)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39 (2480MHz)
EUT Position	: Horizontal		

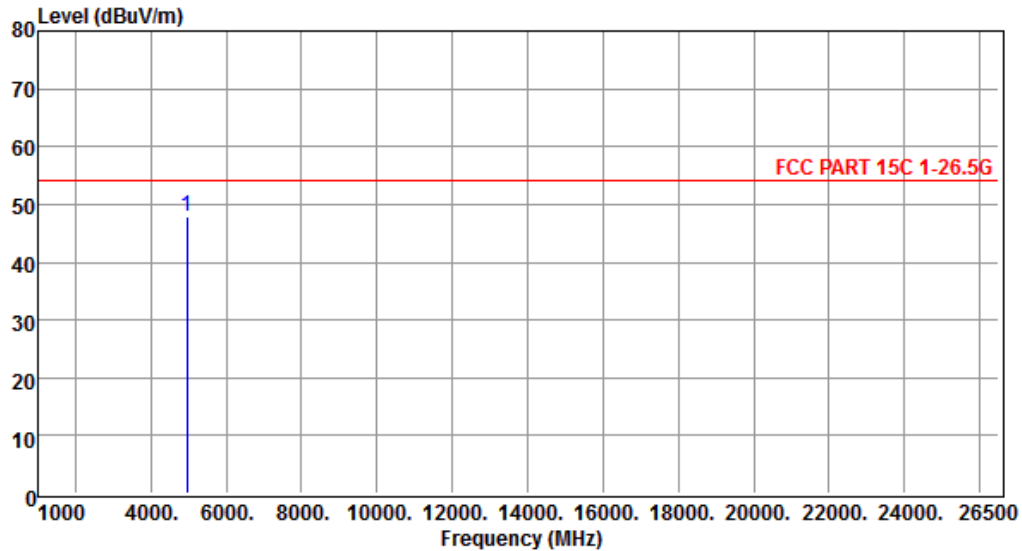

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	44.47	3.50	47.97	54.00	-6.03			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.



4 Out of Band Emission Test

4.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

4.2 Test Arrangement and Procedure

Refer to Sec. 3.2.

4.3 Limit of Field Strength of Fundamental (§ 15.249(d))

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


4.4 Test Result

Compliance

The final test data are shown on the following page(s).

Band-Edge Test Data (Lower Edge)

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00
EUT Position	: Horizontal		

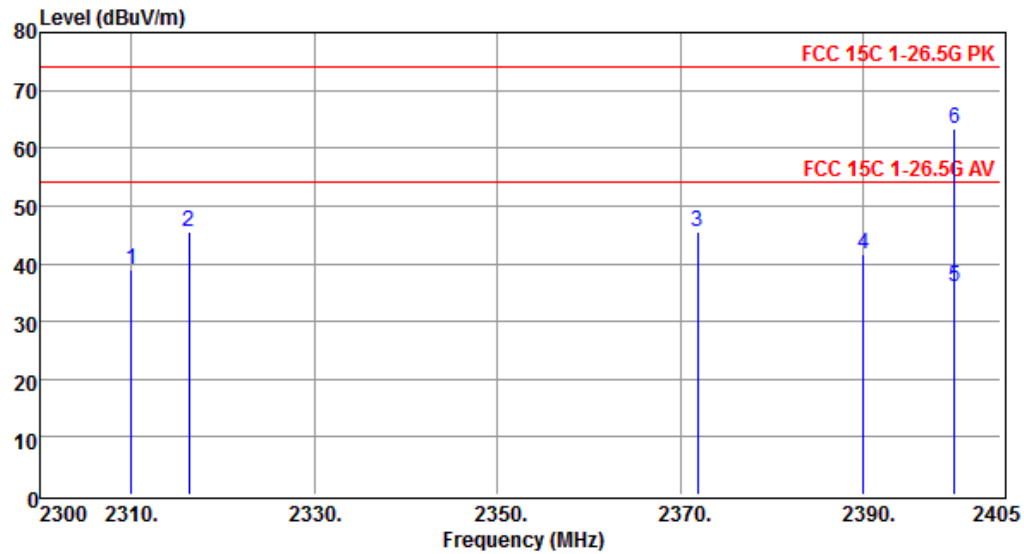

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2310.000	45.28	-6.29	38.99	74.00	-35.01			VERTICAL	Peak
2316.275	51.82	-6.28	45.54	74.00	-28.46			VERTICAL	Peak
2371.925	51.71	-6.10	45.61	74.00	-28.39			VERTICAL	Peak
2390.000	47.59	-6.06	41.53	74.00	-32.47			VERTICAL	Peak
2400.000	42.07	-6.03	36.04	54.00	-17.96			VERTICAL	Average
2400.000	69.39	-6.03	63.36	74.00	-10.64			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
- Spectrum setting:
 - Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.
 - Average Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep = AUTO.

**Band-Edge Test Data (Lower Edge)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00
EUT Position	: Horizontal		

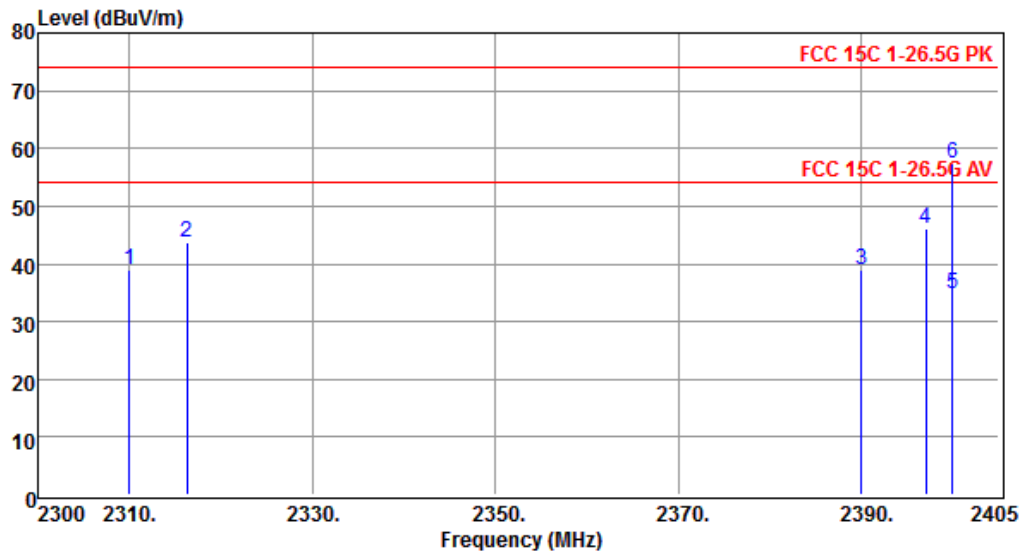

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2310.000	45.23	-6.29	38.94	74.00	-35.06			HORIZONTAL	Peak
2316.275	50.14	-6.28	43.86	74.00	-30.14			HORIZONTAL	Peak
2390.000	44.91	-6.06	38.85	74.00	-35.15			HORIZONTAL	Peak
2397.020	52.16	-6.03	46.13	74.00	-27.87			HORIZONTAL	Peak
2400.000	40.81	-6.03	34.78	54.00	-19.22			HORIZONTAL	Average
2400.000	63.32	-6.03	57.29	74.00	-16.71			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
- Spectrum setting:
 - Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.
 - Average Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep = AUTO.

**Band-Edge Test Data (Upper Edge)**

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39
EUT Position	: Horizontal		

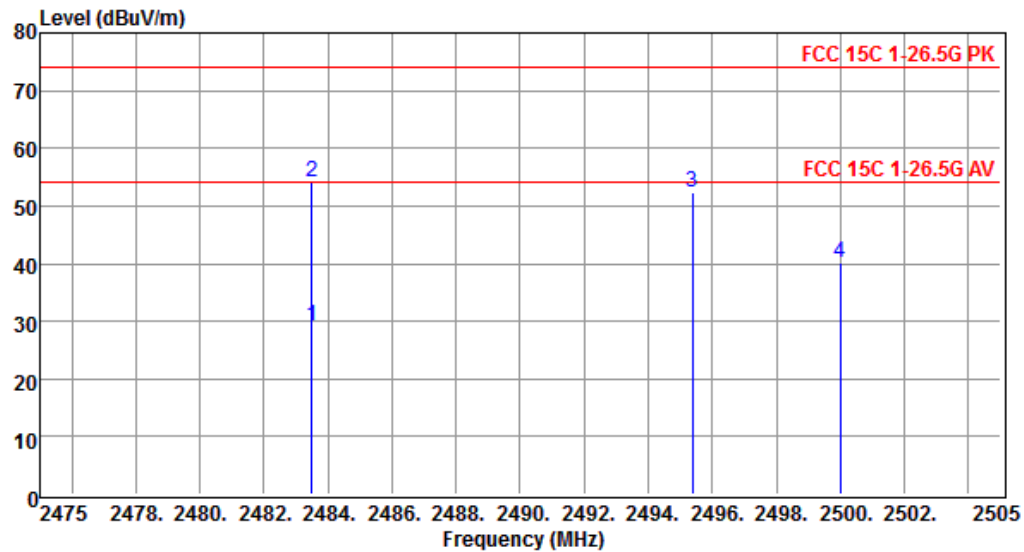

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2483.500	34.87	-5.77	29.10	54.00	-24.90			VERTICAL	Average
2483.500	60.04	-5.77	54.27	74.00	-19.73			VERTICAL	Peak
2495.370	58.08	-5.73	52.35	74.00	-21.65			VERTICAL	Peak
2500.000	45.83	-5.72	40.11	74.00	-33.89			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
- Spectrum setting:
 - Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.
 - Average Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep = AUTO.

Band-Edge Test Data (Upper Edge)

Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39
EUT Position	: Horizontal		

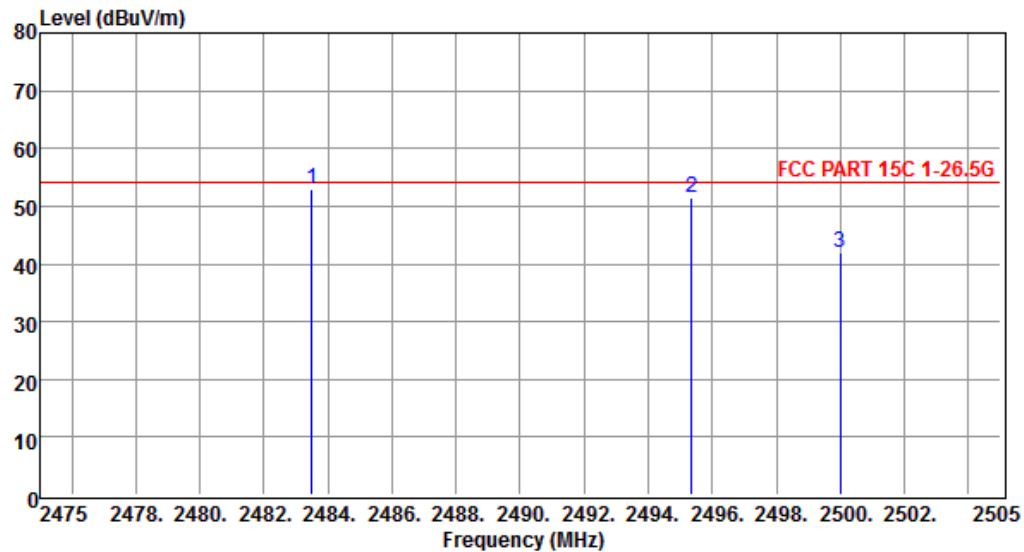

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2483.500	58.72	-5.77	52.95	54.00	-1.05			HORIZONTAL	Peak
2495.340	57.10	-5.73	51.37	54.00	-2.63			HORIZONTAL	Peak
2500.000	47.53	-5.72	41.81	54.00	-12.19			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Remark :


- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
- Spectrum setting:
 - Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.
 - Average Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep = AUTO.

5 20 dB Bandwidth

5.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

5.2 Test Arrangement and Procedure

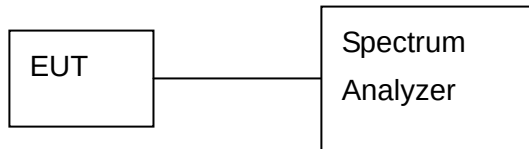

1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. Measured the -20 dB bandwidth and plotted the graph.

5.3 Limit

None; For report purpose only.

5.4 Test Result


No non-compliance noted.

The final test data are shown on the following page(s).

Bluetooth 1 Mbps (DH5)		
Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.6743
Middle	2442	1.4505
High	2480	1.4126




Temperature	: 24.3°C	Humidity	: 38%
Test Date	: 06-Nov-2018	Tested by	: Eason Hsieh
Test Mode	: BLE	Channel	: 00

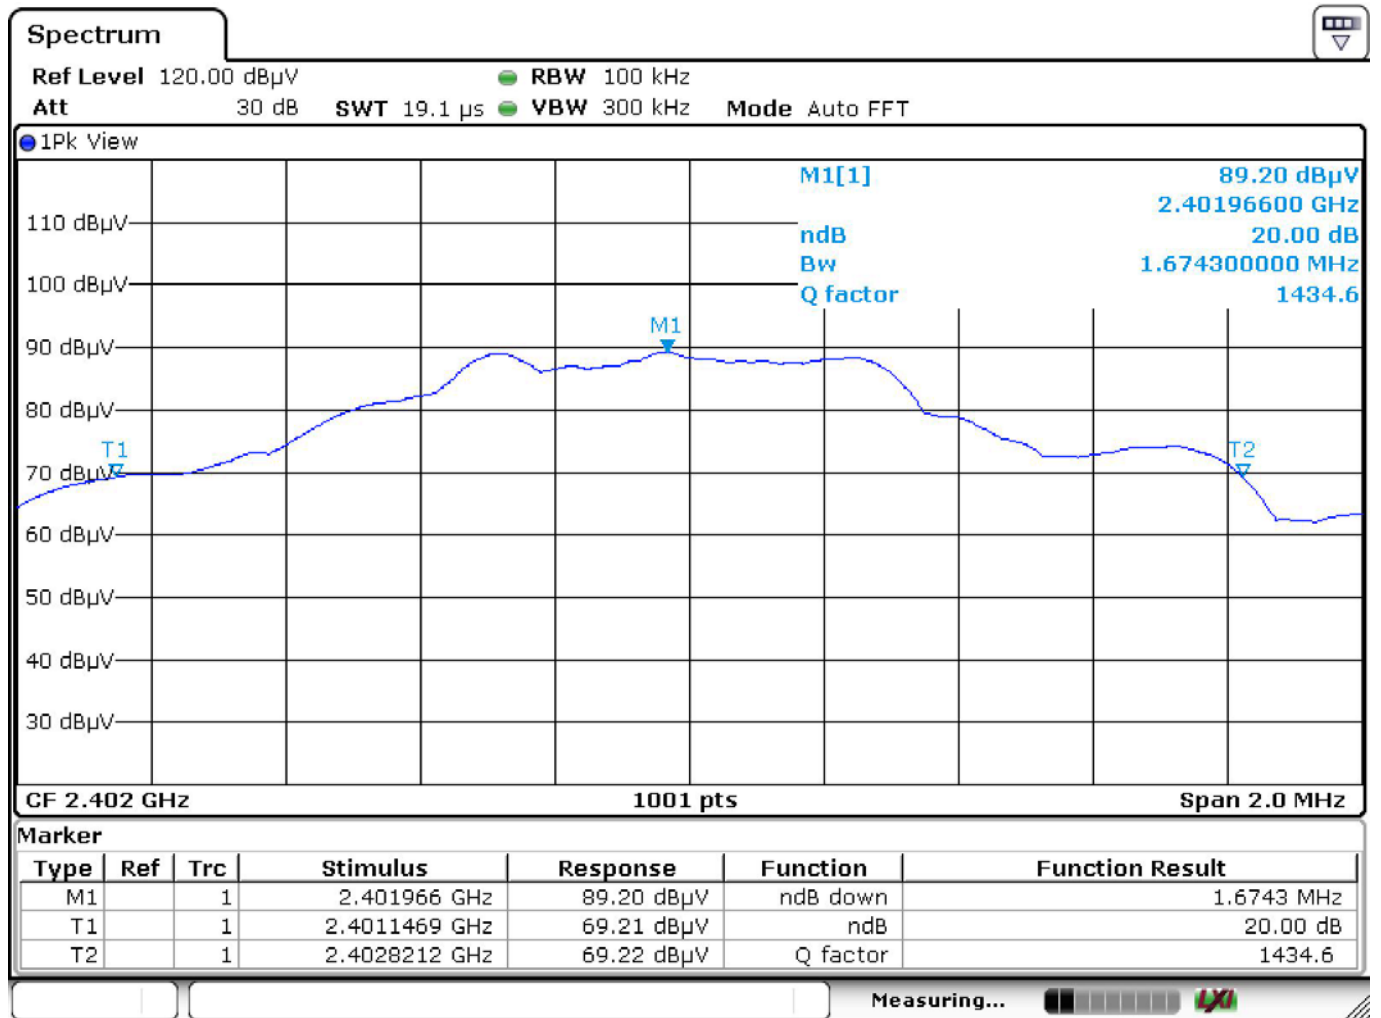




Test Mode : BLE

Channel : 20

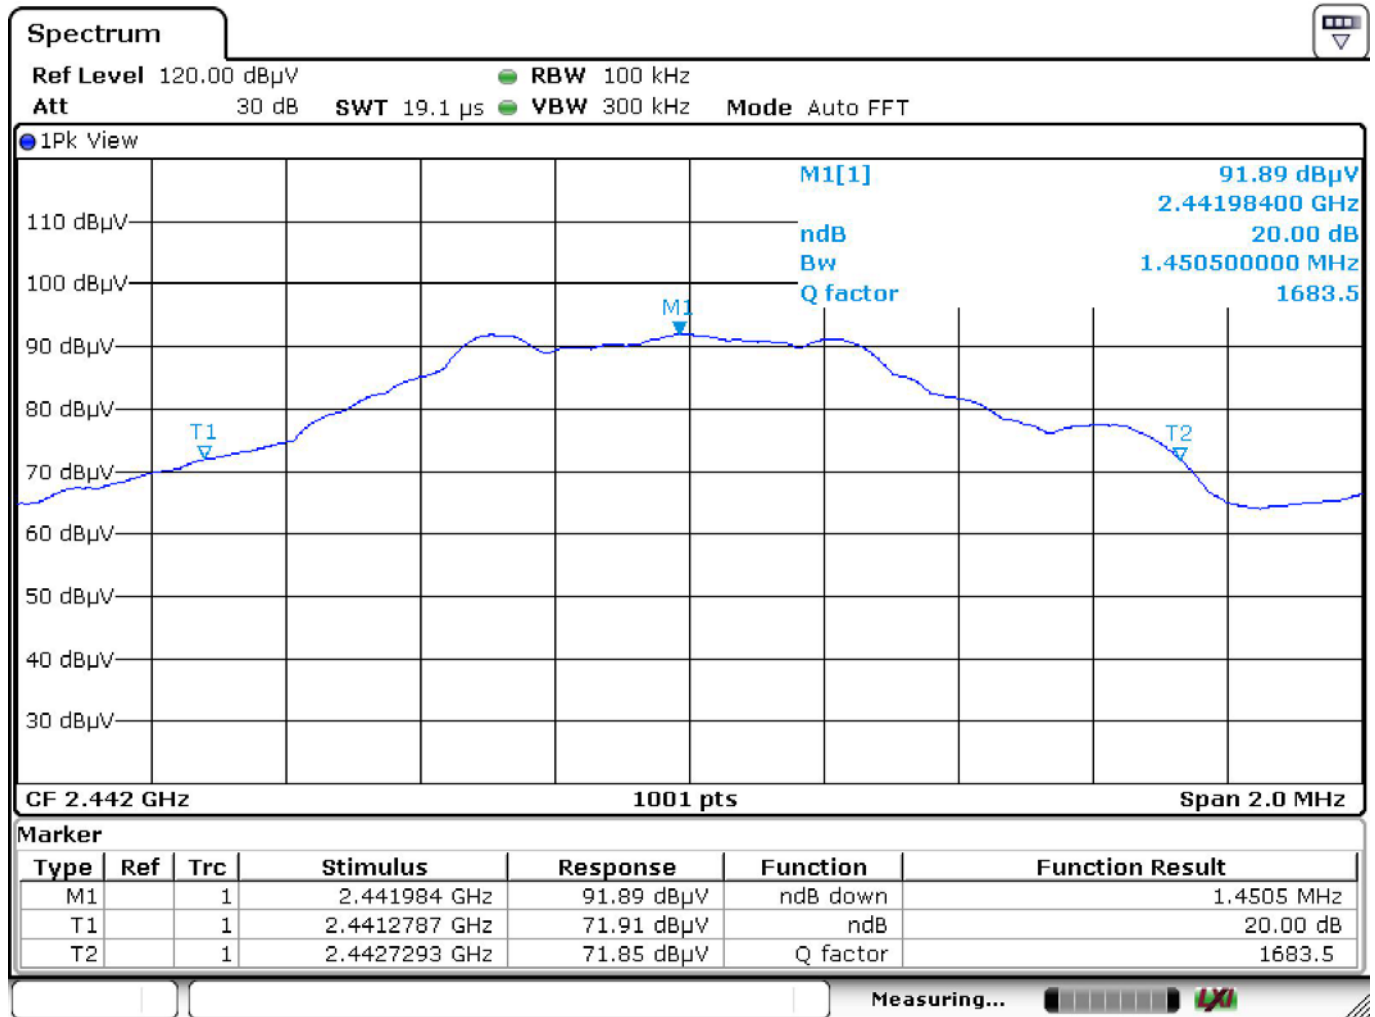



Test Mode : BLE Channel : 39

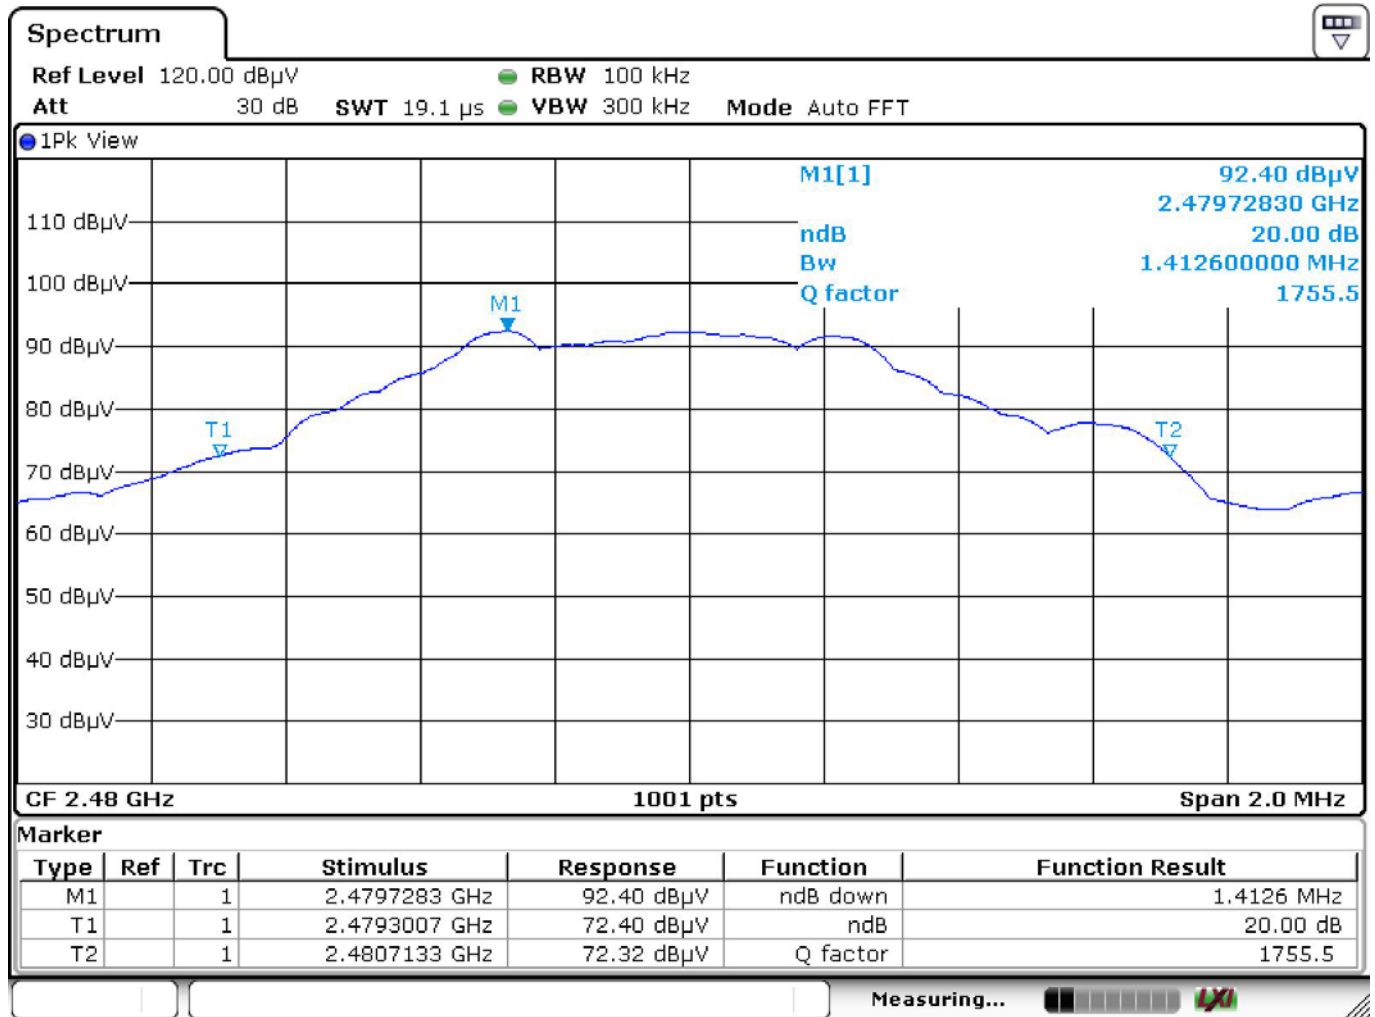



6 Antenna requirement

6.1 Limit (§ 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

6.2 Test Result

Compliance.

The EUT applies a PCB antenna.

— End of Test Report —