

EMC TEST Report

FCC ID: TTG05DW-01

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

Issued Date : Aug. 14, 2006

Report No. : 0509065

Equipment : Door/Window Transmitter

Model No. : DW-01

Applicant : ACES TECHNOLOGY CO., LTD

Address : 9, LANE 369, SEC. 3, TA-TUNG RD.,
HIS-CHIH, TAIPEI, TAIWAN, R.O.C.

Tested by:

Neutron Engineering Inc. EMC Laboratory

Data of Test:

Sep. 12, 2005 ~ Jul. 17, 2006

Testing Engineer : Alan Liu

(Alan Liu)

Technical Manager : Jeff Yang

(Jeff Yang)

Authorized Signatory : Andy Chiu

(Andy Chiu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr City, Taipei, Taiwan

TEL : (02) 2646-5426 FAX : (02) 2646-6815



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	4
2 . SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3 . GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 . EMC EMISSION TEST	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 RADIATED EMISSION LIMITS	11
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	12
4.1.4 DEVIATION FROM TEST STANDARD	12
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 20dB OCCUPIED BANDWIDTH MEASUREMENT	29
4.2.1 MEASUREMENT INSTRUMENTS LIST	29
4.2.2 TEST RESULTS	29
5 . EUT TEST PHOTO	31
6 . PRODUCT LABELING	34

1. CERTIFICATION

Equipment : Door/Window Transmitter
Trade Name : ACES
Model No. : DW-01
Applicant : ACES TECHNOLOGY CO., LTD
Data of Test : Sep. 12, 2005 ~ Jul. 17, 2006
Test Item : ENGINEERING SAMPLE
Standards : FCC Part15, Subpart C / RSS-210: 2004/ ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-0509065) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and CNLA according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards: (Antenna to EUT distance is **3 m**)

FCC Part15(15.231), Subpart C		
Standard	Test Item	Judgment
15.207	Conducted Emission	N/A
15.209 & 15.231(b)	Radiated Emission	PASS
15.231(c)	20dB Occupied Bandwidth Measurement	PASS

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **OS01** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Door/Window Transmitter	
Trade Name	ACES	
Model No.	DW-01	
OEM Brand/Model No.	N/A	
Model Difference	N/A	
Product Description	The EUT is a Door/Window Transmitter.	
	A. Operation Frequency	433.9 MHz
	B. Modulation Type	Pulse Modulation (ASK)
	C. Antenna Designation	Integral
	D. Number Of Channel	1
	E. Transmitting Time	Periodic ≤ 5 seconds
	F. Associated Receiver	FCC DOC
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Supply	DC 3.6V	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	Vertical Stand
Mode 2	Laid
Mode 3	Side Stand

For Conducted / Radiated Test	
Final Test Mode	Description
Mode 1	Vertical Stand
Mode 2	Laid
Mode 3	Side Stand

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

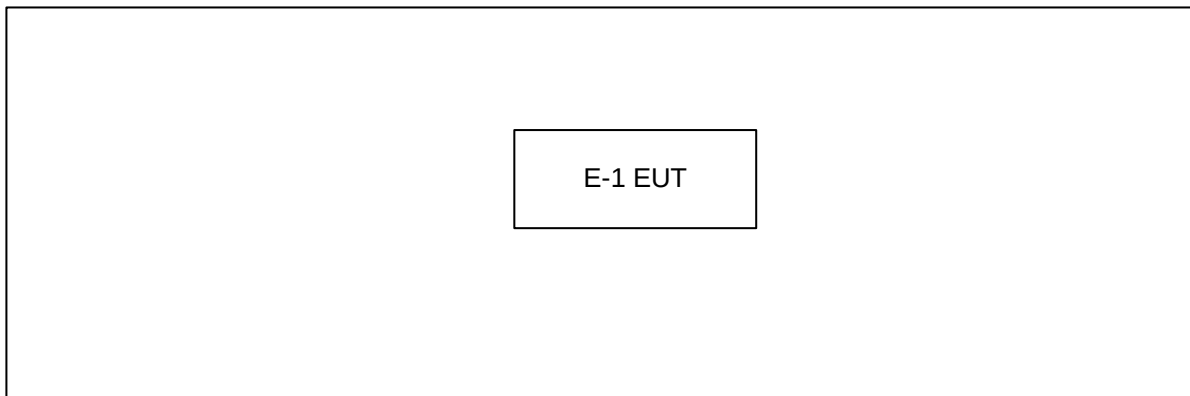

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Door/Window Transmitter	ACES	DW-01	TTG05DW-01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
	N/A	N/A	N/A	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS (Frequency Range 30MHz-1000MHz)

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

Notes:

- (1) Emission level in dBuV/m=20 log (uV/m)
- (2) Measurement was performed at an antenna to the closed point of EUT distance of meters.
- (3) Fundamental frequency shall not be located within the Restricted Bands specified in provision of 15.205.
- (4) If spurious frequency which falls within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Notes:

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3177	Feb. 06, 2007
2	Test Cable	N/A	10M_OS01	N/A	Nov. 29, 2006
3	Test Cable	N/A	OS01-1/-2	N/A	Nov. 29, 2006
4	Pre-Amplifier	Anritsu	MH648A	M09961	Nov. 29, 2006
5	Spectrum Analyzer	ADVAN TEST	R3261C	81720298	Sep. 14, 2006
6	Test Receiver	MEB	SMV41	130	Nov. 22, 2006
7	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-325	Oct. 26, 2006
8	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
9	Turn Table	Chance Most	CMTB-1.5	N/A	N/A

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.1.3 TEST PROCEDURE


- The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation

4.1.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

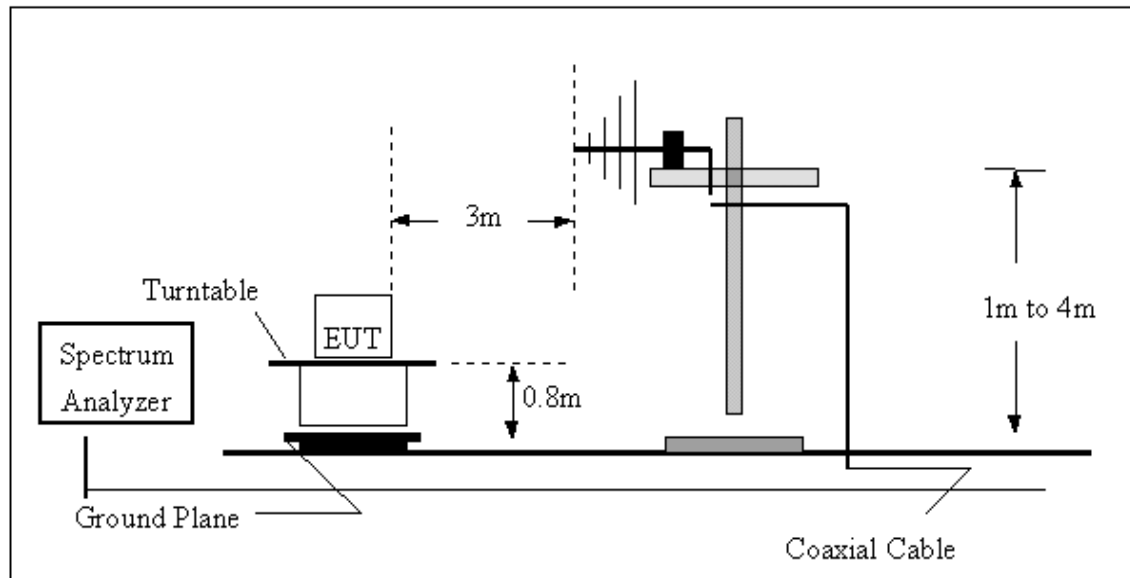

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

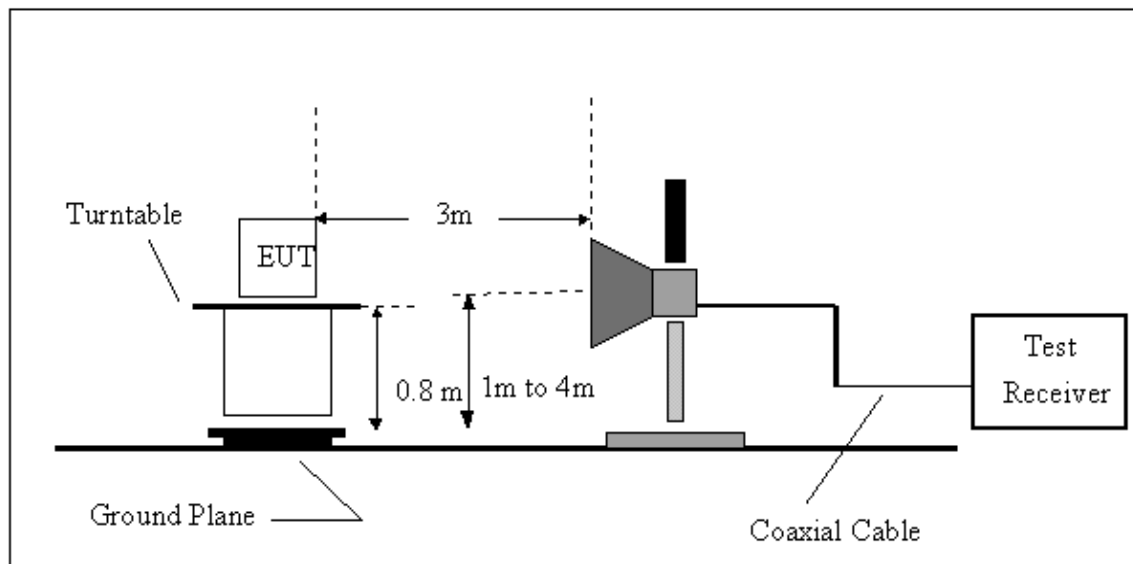

4.1.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.7 TEST RESULTS

EUT：	Door/Window Transmitter	Model No.：	DW-01
Temperature：	26℃	Relative Humidity：	76%
Pressure：	1016hPa	Test Power：	DC 3.6V
Test band：	30MHz ~ 1000MHz		
Test Mode：	Vertical Stand		
The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.			

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
70.04	V	Peak	26.77	- 6.99	19.78	40.00	- 20.22	
110.96	V	Peak	24.82	- 6.32	18.50	43.50	- 25.00	
174.89	V	Peak	25.35	- 4.69	20.66	43.50	- 22.84	
427.17	V	Peak	34.00	- 0.37	33.63	46.00	- 12.37	
637.79	V	Peak	25.75	4.09	29.84	46.00	- 16.16	
759.76	V	Peak	23.35	6.05	29.40	46.00	- 16.60	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 1000MHz		
Test Mode :	Vertical Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
118.45	H	Peak	24.87	- 5.60	19.27	43.50	- 24.23	
279.00	H	Peak	23.55	- 4.23	19.32	46.00	- 26.68	
420.47	H	Peak	27.07	- 0.53	26.54	46.00	- 19.46	
427.17	H	Peak	31.52	- 0.37	31.15	46.00	- 14.85	
445.26	H	Peak	28.62	0.06	28.68	46.00	- 17.32	
841.37	H	Peak	25.10	7.28	32.38	46.00	- 13.62	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 1000MHz		
Test Mode :	Laid		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
134.38	V	Peak	31.25	- 4.78	26.47	43.50	- 17.03	
163.50	V	Peak	29.37	- 3.87	25.50	43.50	- 18.00	
420.44	V	Peak	31.95	- 0.53	31.42	46.00	- 14.58	
427.18	V	Peak	35.37	- 0.37	35.00	46.00	- 11.00	
761.26	V	Peak	22.77	6.07	28.84	46.00	- 17.16	
766.04	V	Peak	24.60	6.16	30.76	46.00	- 15.24	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 1000MHz		
Test Mode :	Laid		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
48.02	H	Peak	29.27	- 5.90	23.37	40.00	- 16.63	
127.98	H	Peak	30.52	- 5.12	25.40	43.50	- 18.10	
420.49	H	Peak	31.50	- 0.53	30.97	46.00	- 15.03	
427.18	H	Peak	34.85	- 0.37	34.48	46.00	- 11.52	
649.80	H	Peak	27.67	4.25	31.92	46.00	- 14.08	
766.20	H	Peak	26.54	6.17	32.71	46.00	- 13.29	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 1000MHz		
Test Mode :	Side Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
47.02	V	Peak	27.07	- 5.91	21.16	40.00	- 18.84	
79.96	V	Peak	32.52	- 9.38	23.14	40.00	- 16.86	
160.87	V	Peak	24.55	- 3.69	20.86	43.50	- 22.64	
420.43	V	Peak	33.40	- 0.53	32.87	46.00	- 13.13	
759.44	V	Peak	24.95	6.05	31.00	46.00	- 15.00	
853.32	V	Peak	22.85	7.43	30.28	46.00	- 15.72	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 1000MHz		
Test Mode :	Side Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
30.03	H	Peak	29.22	- 6.47	22.75	40.00	- 17.25	
47.96	H	Peak	27.42	- 5.90	21.52	40.00	- 18.48	
160.96	H	Peak	23.87	- 3.70	20.17	43.50	- 23.33	
296.96	H	Peak	24.27	- 3.56	20.71	46.00	- 25.29	
427.16	H	Peak	34.12	- 0.37	33.75	46.00	- 12.25	
454.27	H	Peak	31.12	0.27	31.39	46.00	- 14.61	

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measure-ment didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz ◦
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Vertical Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	V	68.70	-0.21	- 1.33	68.49	67.16	100.83	80.83	- 13.67	AV
867.89	S	V	27.10	7.63	- 1.33	34.73	33.40	80.83	60.83	- 27.43	AV
1296.00	S	V	53.52	-6.89	- 1.33	46.63	45.30	80.83	60.83	- 15.53	AV
1735.60	S	V	54.34	-4.51	- 1.33	49.83	48.50	80.83	60.83	- 12.33	AV
2168.00	S	V	43.02	-2.45	- 1.33	40.57	39.24	80.83	60.83	- 21.59	AV
2600.00	S	V	45.83	-1.18	- 1.33	44.65	43.32	80.83	60.83	- 17.51	AV
3040.00	S	V	52.01	0.68	- 1.33	52.69	51.36	80.83	60.83	- 9.47	AV
3471.20	S	V	41.45	2.03	- 1.33	43.48	42.15	80.83	60.83	- 18.68	AV
3912.00	S	V	47.66	3.50	- 1.33	51.16	49.83	54.00	54.00	- 2.84	Peak
4339.00	S	V	40.40	3.81	- 1.33	44.21	42.88	54.00	54.00	- 9.79	Peak

Remark :

- (1) Spectrum Setting:
 9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
 150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
 30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦
- (4) The average value of fundamental frequency is:
 Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Vertical Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	H	72.57	-0.21	- 1.33	72.36	71.03	100.83	80.83	- 9.80	AV
867.89	S	H	29.72	7.63	- 1.33	37.35	36.02	80.83	60.83	- 24.81	AV
1296.00	S	H	43.53	-6.89	- 1.33	36.64	35.31	80.83	60.83	- 25.52	AV
1735.60	S	H	45.89	-4.51	- 1.33	41.38	40.05	80.83	60.83	- 20.78	AV
2169.50	S	H	39.26	-2.45	- 1.33	36.81	35.48	80.83	60.83	- 25.35	AV
2600.00	S	H	45.19	-1.18	- 1.33	44.01	42.68	80.83	60.83	- 18.15	AV
3040.00	S	H	47.81	0.68	- 1.33	48.49	47.16	80.83	60.83	- 13.67	AV
3472.00	S	H	42.72	2.03	- 1.33	44.75	43.42	80.83	60.83	- 17.41	AV
3912.00	S	H	47.96	3.50	- 1.33	51.46	50.13	54.00	54.00	- 2.54	Peak
4288.00	S	H	41.35	3.81	- 1.33	45.16	43.83	54.00	54.00	- 8.84	Peak

Remark :

- (1) Spectrum Setting:
 9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
 150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
 30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (4) The average value of fundamental frequency is:
 Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Laid		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	V	68.00	-0.21	- 1.33	67.79	66.46	100.83	80.83	- 14.37	AV
867.90	S	V	28.92	7.63	- 1.33	36.55	35.22	80.83	60.83	- 25.61	AV
1296.00	S	V	46.68	-6.89	- 1.33	39.79	38.46	80.83	60.83	- 22.37	AV
1735.60	S	V	47.02	-4.51	- 1.33	42.51	41.18	80.83	60.83	- 19.65	AV
2169.50	S	V	39.62	-2.45	- 1.33	37.17	35.84	80.83	60.83	- 24.99	AV
2600.00	S	V	45.27	-1.18	- 1.33	44.09	42.76	80.83	60.83	- 18.07	AV
3040.00	S	V	50.96	0.68	- 1.33	51.64	50.31	80.83	60.83	- 10.52	AV
3472.00	S	V	44.66	2.03	- 1.33	46.69	45.36	80.83	60.83	- 15.47	AV
3912.00	S	V	43.12	3.50	- 1.33	46.62	45.29	54.00	54.00	- 7.38	Peak
4339.00	S	V	39.51	3.81	- 1.33	43.32	41.99	54.00	54.00	- 10.68	Peak

Remark :

- (1) Spectrum Setting:
 9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
 150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
 30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦
- (4) The average value of fundamental frequency is:
 Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Laid		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	H	66.97	-0.21	-1.33	66.76	65.43	100.83	80.83	- 15.40	AV
867.91	S	H	26.57	7.63	-1.33	34.20	32.87	80.83	60.83	- 27.96	AV
1296.00	S	H	50.01	-6.89	-1.33	43.12	41.79	80.83	60.83	- 19.04	AV
1735.60	S	H	47.57	-4.51	-1.33	43.06	41.73	80.83	60.83	- 19.10	AV
2169.50	S	H	40.13	-2.45	-1.33	37.68	36.35	80.83	60.83	- 24.48	AV
2600.00	S	H	43.68	-1.18	-1.33	42.50	41.17	80.83	60.83	- 19.66	AV
3040.00	S	H	45.11	0.68	-1.33	45.79	44.46	80.83	60.83	- 16.37	AV
3440.00	S	H	41.99	1.93	-1.33	43.92	42.59	80.83	60.83	- 18.24	AV
3905.10	S	H	41.80	3.47	-1.33	45.27	43.94	54.00	54.00	- 8.73	Peak
4339.00	S	H	39.67	3.81	-1.33	43.48	42.15	54.00	54.00	- 10.52	Peak

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (4) The average value of fundamental frequency is:
Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Side Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	V	65.32	-0.21	-1.33	65.11	63.78	100.83	80.83	- 17.05	AV
867.88	S	V	26.05	7.63	-1.33	33.68	32.35	80.83	60.83	- 28.48	AV
1296.00	S	V	46.37	-6.89	-1.33	39.48	38.15	80.83	60.83	- 22.68	AV
1735.60	S	V	48.05	-4.51	-1.33	43.54	42.21	80.83	60.83	- 18.62	AV
2168.00	S	V	41.99	-2.45	-1.33	39.54	38.21	80.83	60.83	- 22.62	AV
2600.00	S	V	48.23	-1.18	-1.33	47.05	45.72	80.83	60.83	- 15.11	AV
3040.00	S	V	45.26	0.68	-1.33	45.94	44.61	80.83	60.83	- 16.22	AV
3472.00	S	V	44.79	2.03	-1.33	46.82	45.49	80.83	60.83	- 15.34	AV
3912.00	S	V	42.94	3.50	-1.33	46.44	45.11	54.00	54.00	- 7.56	Peak
4339.00	S	V	39.21	3.81	-1.33	43.02	41.69	54.00	54.00	- 10.98	Peak

Remark :

- (1) Spectrum Setting:
 9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
 150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
 30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦
- (4) The average value of fundamental frequency is:
 Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
 "X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	26 °C	Relative Humidity :	76 %
Pressure :	1016hPa	Test Power :	DC 3.6V
Test band :	30MHz ~ 5000MHz (Fundamental & Spurious)		
Test Mode :	Side Stand		

The following table lists worst case data from TX with various orthogonal planes on the EUT antenna.

About the duty cycle correction factor calculated, please refer to the next page (Table-1).

Freq. (MHz)	F/S	Ant.Pol. H/V	Reading (dBuV)	Ant./CL CF(dB)	Duty Cycle CF(dB)	Peak (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margins (dBuV/m)	Note
433.94	F	H	70.57	-0.21	-1.33	70.36	69.03	100.83	80.83	- 11.80	AV
867.90	S	H	30.35	7.63	-1.33	37.98	36.65	80.83	60.83	- 24.18	AV
1296.00	S	H	48.13	-6.89	-1.33	41.24	39.91	80.83	60.83	- 20.92	AV
1735.60	S	H	47.03	-4.51	-1.33	42.52	41.19	80.83	60.83	- 19.64	AV
2169.50	S	H	39.81	-2.45	-1.33	37.36	36.03	80.83	60.83	- 24.80	AV
2480.00	S	H	41.35	-1.66	-1.33	39.69	38.36	80.83	60.83	- 22.47	AV
2603.40	S	H	39.54	-1.16	-1.33	38.38	37.05	80.83	60.83	- 23.78	AV
3040.00	S	H	45.29	0.68	-1.33	45.97	44.64	80.83	60.83	- 16.19	AV
3472.00	S	H	42.42	2.03	-1.33	44.45	43.12	80.83	60.83	- 17.71	AV
3905.10	S	H	40.48	3.47	-1.33	43.95	42.62	54.00	54.00	- 10.05	Peak
3968.00	S	H	41.26	3.68	-1.33	44.94	43.61	54.00	54.00	- 9.06	Peak
4320.00	S	H	41.02	3.81	-1.33	44.83	43.50	54.00	54.00	- 9.17	Peak
4339.00	S	H	38.73	3.81	-1.33	42.54	41.21	54.00	54.00	- 11.46	Peak

Remark :

- (1) Spectrum Setting:
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not how in table ◦
- (4) The average value of fundamental frequency is:
Average = Peak value + 20log(Duty cycle)
- (5) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand


Duty Cycle Correction Factor Calculated			
EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	23 °C	Relative Humidity :	51 %
Pressure :	1012hPa	Test Power :	DC 3.6V

Frequency (MHz)	Pulse Train $T_{(P)}$ (ms)	Total Duration of EUT at active state($T_{(on)}$) (ms)	Factor = $20 \log[T_{(on)} / T_{(P)}]$
433.9	168 ms	144 ms (The data is always "1")	-1.33 dB
		10.4 ms (The data is always "0")	-24.16 dB



Note:

The final calculate will be used the worst case condition:" The data is always " 1 " "

Plot For Pulse Train: $T_{(P)}$

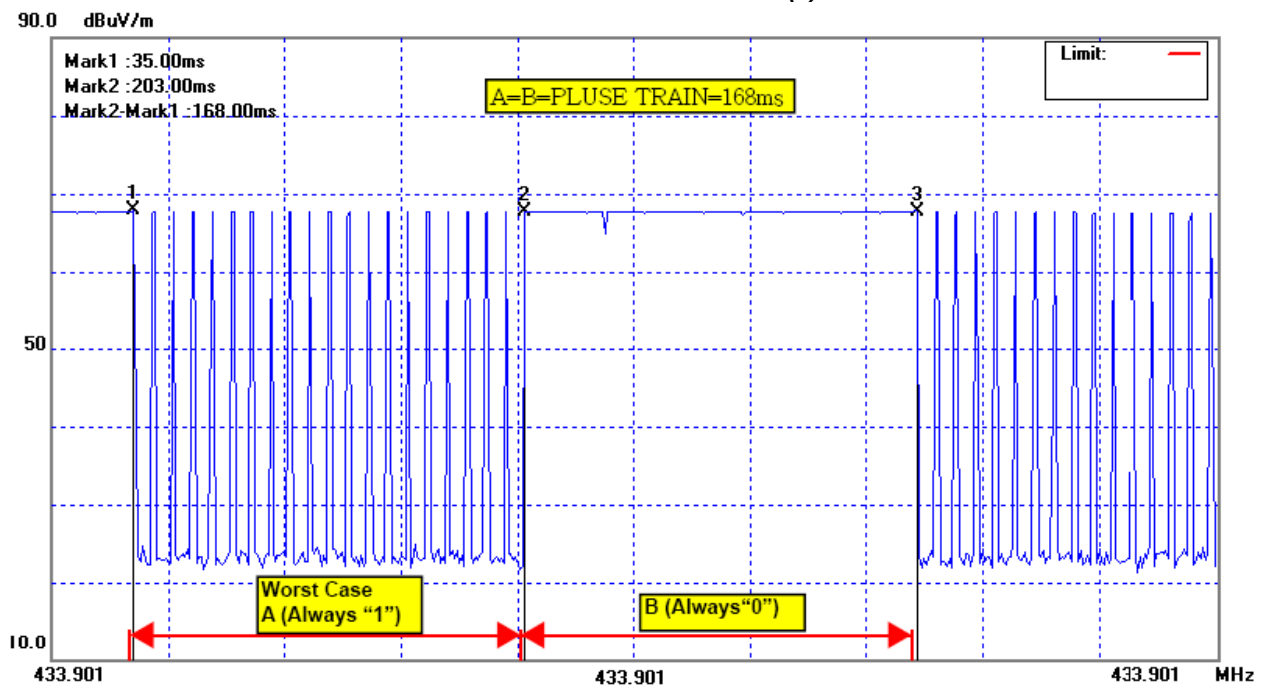


Plot For Total Duration of EUT at active state: $T_{(on)}$

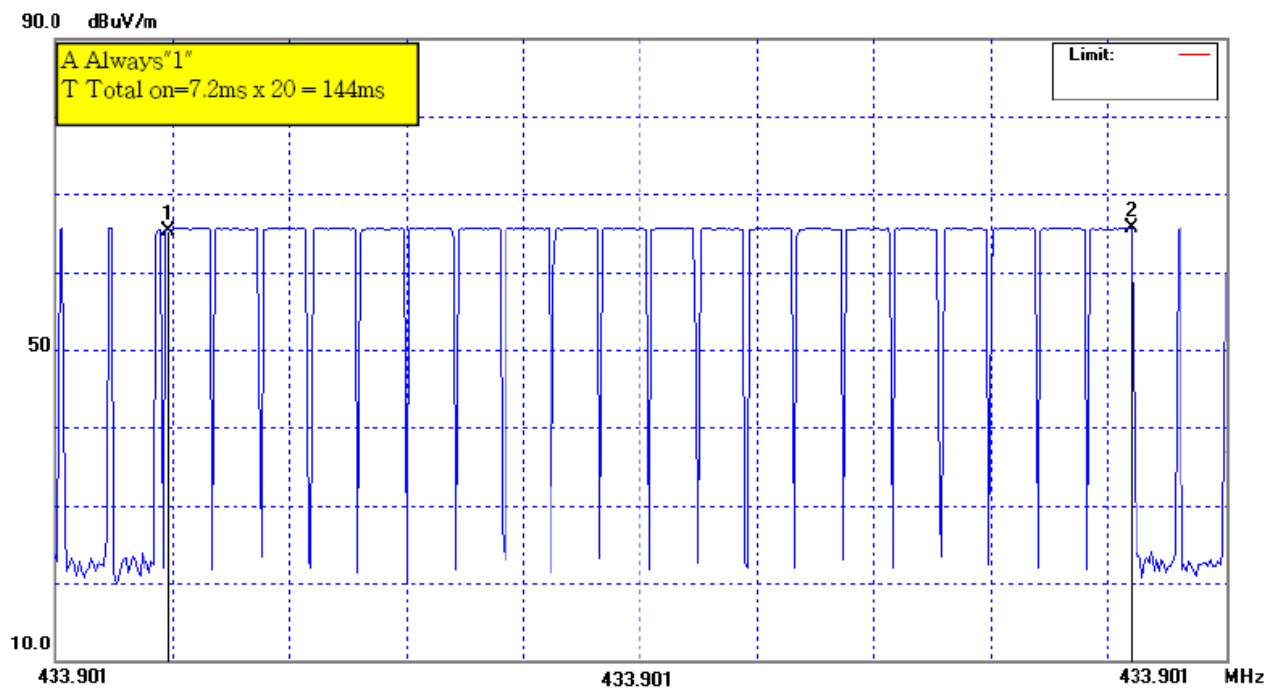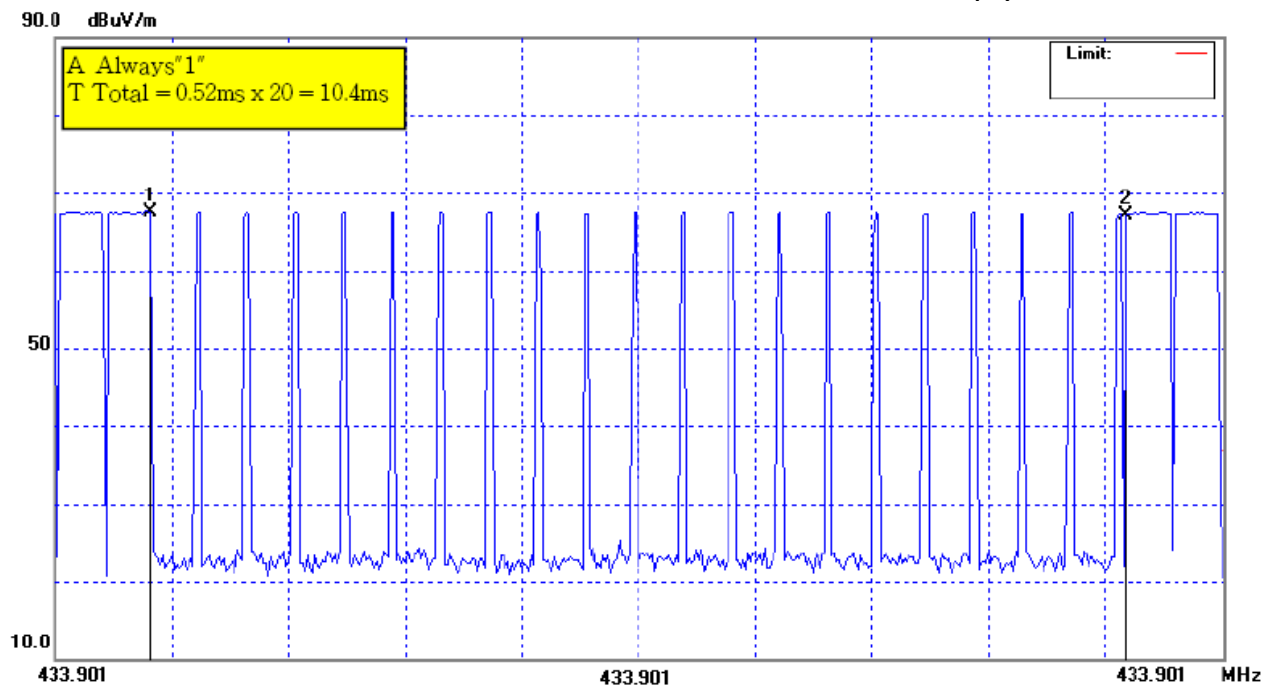

90.0 dBuV/m

Mark1 :16.70ms
Mark2 :23.90ms
Mark2-Mark1 :7.20ms


Limit: —

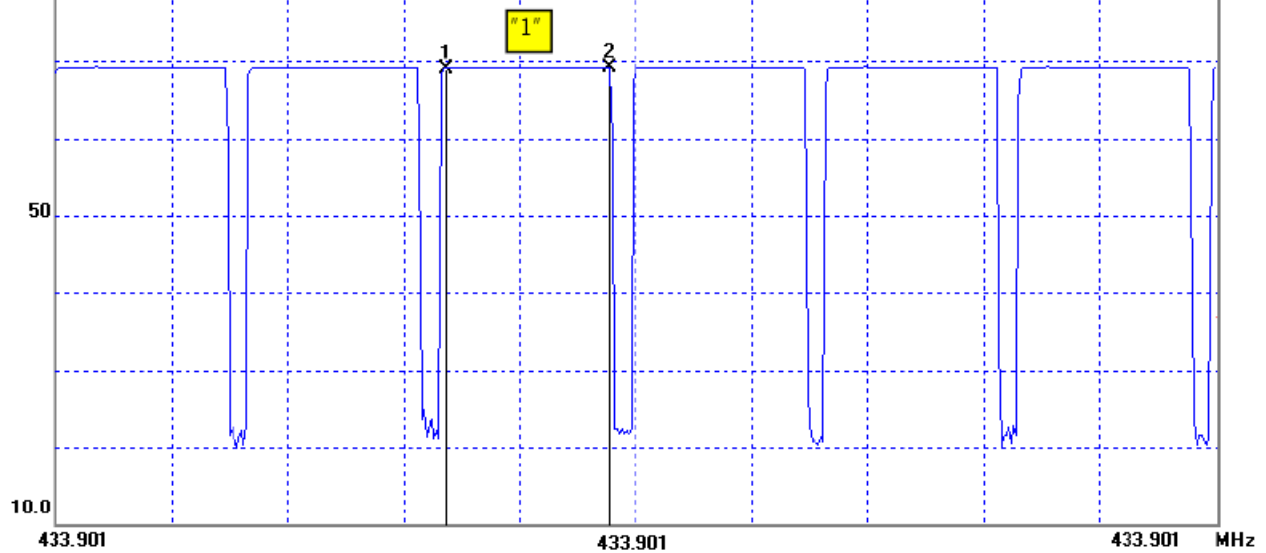

90.0 dBuV/m

Mark1 :12.60ms
Mark2 :13.12ms
Mark2-Mark1 :0.52ms

Limit: —

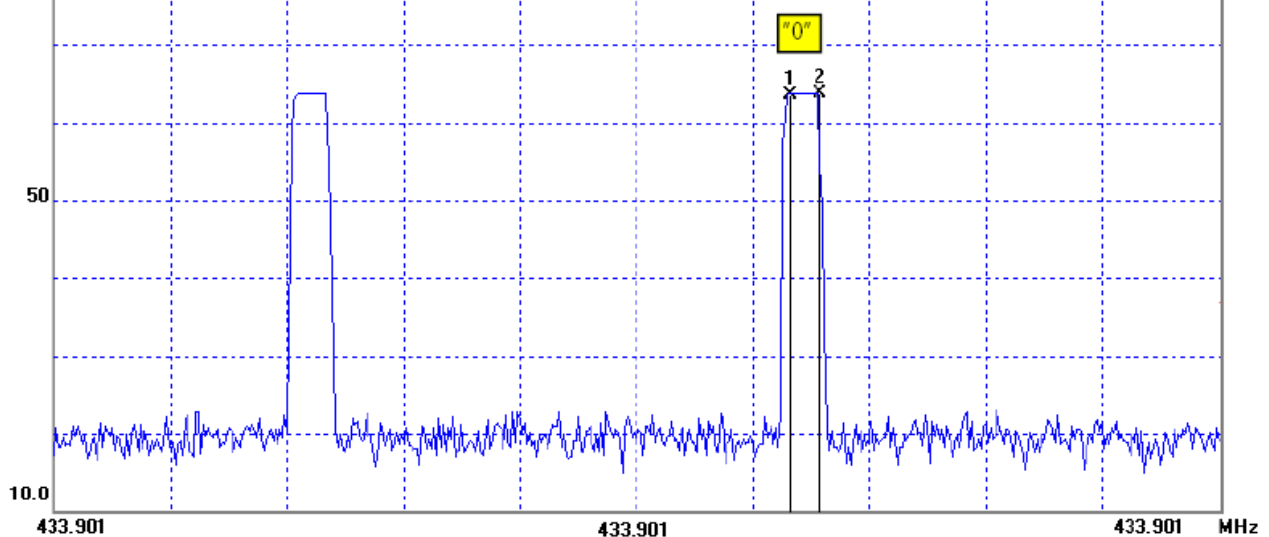

4.2 20dB OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	ADVAN TEST	R3132	81700025	Feb. 21, 2007
2	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3177	Feb. 06, 2007

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.2.2 TEST RESULTS

EUT :	Door/Window Transmitter	Model No. :	DW-01
Temperature :	23 °C	Relative Humidity :	51 %
Pressure :	1016hPa	Test Power :	DC 3.6V

Frequency (MHz)	20 dB Bandwidth (KHz)	Max. Limit (KHz)	Test Result
433.9	462	1084.8	PASS

Note:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.



ATTACHMENT

PHOTOGRAPHS OF EUT