

Report on the Radio Testing of:

Hearing Aid Accessories

Model(s): WIDEX TV Play

In accordance with
47 CFR FCC Part 15C
(Non-Frequency Hopping Spread Spectrum
Device) Bluetooth 4.1



PSB Singapore

Add value.
Inspire trust.

Prepared for:

Widex A/S

Nymøllevej 6, 3540, Lynge, Denmark

COMMERCIAL-IN-CONFIDENCE

Document Number: 7191193068-EEC18/08 | Issue: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Foo Kai Maun	17 Oct 2018	
Authorised Signatory	Quek Keng Huat	16 Oct 2018	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD PSB document control rules.

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the mentioned standard(s).



LA-2007-0380-A
LA-2007-0381-F
LA-2007-0382-B
LA-2007-0383-G

LA-2007-0384-G
LA-2007-0385-E
LA-2007-0386-C
LA-2010-0464-D

The results reported herein have been performed in accordance with the terms of accreditation under the Singapore Accreditation Council. Inspections/Calibrations/Tests marked "Not SAC-SINGLAS Accredited" in this Report are not included in the SAC-SINGLAS Accreditation Schedule for our inspection body/laboratory.

Laboratory:
TÜV SÜD PSB Pte. Ltd.
No.1 Science Park Drive
Singapore 118221

Phone : +65-6885 1333
Fax : +65-6776 8670
E-mail: enquiries@tuv-sud-psb.sg
www.tuv-sud-psb.sg
Co. Reg : 199002667R

Regional Head Office:
TÜV SÜD Asia Pacific Pte. Ltd.
1 Science Park Drive, #02-01
Singapore 118221
TUV®

Page 1 of 74

Contents

1	Report Summary	3
1.1	Report Modification Record	3
1.2	Introduction	4
1.3	Brief Summary of Results	5
1.4	Product Information	7
1.5	Deviations from the Standard	8
1.6	EUT Modification Record	8
1.7	Test Location(s)	8
1.8	Test Facilities Registrations	9
1.9	Supporting Equipment	10
2	Test Details	11
2.1	Conducted Emissions	11
2.2	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)	14
2.3	Spectrum Bandwidth (6db Bandwidth Measurement)	19
2.4	Maximum Peak Power	23
2.5	RF Conducted Spurious Emissions (Non-Restricted Bands)	25
2.6	RF Conducted Spurious Emissions (Restricted Bands)	30
2.7	Band Edge Compliance (Conducted)	43
2.8	Band Edge Compliance (Radiated)	46
2.9	Peak Power Spectral Density	51
2.10	Maximum Permissible Exposure (MPE)	55
3	Photographs	56
4	Test Equipment	70
5	Measurement Uncertainty	71
6	Annex A – FCC Label and Position	72
	End of the Test Report	74



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	17 Oct 2018



1.2 Introduction

Applicant	:	Widex A/S
Manufacturer	:	SVI Public Company Limited
Factory	:	141-142 Moo5, Tiwanon Rd., Bangkadi, Muang, Pathumthani 12000 Thailand
Model Number(s)	:	Widex TV Play
Serial Number(s)	:	001299
SAM4s Version	:	1.2.4
Number of Samples Tested	:	1
Test Sample(s) Condition	:	Good
Quotation Reference	:	5122067
Test Specification/Issue/Date	:	FCC 47 CFR Part 15C
Test Sample(s) Received Date	:	29 Aug 2018
Start of Test	:	12 Jul 2018
Finish of Test	:	18 Sep 2018

1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with specifications as shown below.

Specification Clause	Test Description	Result	Comments/Base Standard
47 CFR FCC Part 15			
15.107(a), 15.207	Conducted Emissions	Pass	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.109(a), 15.205, 15.209	Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)	Pass	ANSI C63.4: 2014 ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(a)(2)	Spectrum Bandwidth (6dB Bandwidth Measurement)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(b)(3)	Maximum Peak Power	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(d)	RF Conducted Spurious Emissions (Non-Restricted Bands)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(d)	RF Conducted Spurious Emissions (Restricted Bands)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(d)	Band Edge Compliance (Conducted)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(d)	Band Edge Compliance (Radiated)	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.247(e)	Peak Power Spectral Density	Pass	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
15.35(c)	Duty Cycle Factor Computation	Not Applicable *See Note 4	ANSI C63.10: 2013 KDB 558074 D01 DTS Measurement Guidance V05: 2018
2.1091	Maximum Permissible Exposure	Pass	

Notes

1. All the measurements in section 15.247 were done based on conducted measurements except Band Edge Compliance (Radiated) test.
2. The EUT is a Class B device when in non-transmitting state and meets the 47 CFR FCC Part15B Class B requirements.
3. The maximum measured RF power of the Equipment Under Test is 7.78dBm.
4. The EUT was operated in continuous transmission, ie 100% duty cycle.
5. The Equipment Under Test (EUT) is a Bluetooth Low Energy 4.2 device.



1.4 Product Information

1.4.1 Technical Description

Description	:	The Equipment Under Test(s) (EUT(s)) is a Hearing Aid Accessories.
Microprocessor	:	NXP NxH2003
Operating Frequency	:	2.402GHz – 2.480GHz
Clock / Oscillator Frequency	:	32MHz
Modulation	:	Gaussian Frequency Shift Keying, GFSK
Antenna Gain	:	Antenna 0: 3.4dBi Antenna 1: 2.0dBi
Port / Connectors	:	1. Power connector 2. Optical IN port 3. Analog IN port
Rated Power	:	5Vdc 550mA
Accessories	:	Nil

1.4.2 Test Configuration and Modes of Operation

Mode(s)	Description								
Maximum RF power transmission	The EUT was exercised in the mode, transmitting at lower, middle and upper channels as shown below one at a time with all supported modulation schemes were evaluated. For Band Edge Compliance, only lower and upper channels were evaluated. <table border="1"> <thead> <tr> <th>Transmit Channel</th><th>Frequency (GHz)</th></tr> </thead> <tbody> <tr> <td>Channel 0 (Lower Channel)</td><td>2.402</td></tr> <tr> <td>Channel 19 (Middle Channel)</td><td>2.440</td></tr> <tr> <td>Channel 39 (upper Channel)</td><td>2.480</td></tr> </tbody> </table>	Transmit Channel	Frequency (GHz)	Channel 0 (Lower Channel)	2.402	Channel 19 (Middle Channel)	2.440	Channel 39 (upper Channel)	2.480
Transmit Channel	Frequency (GHz)								
Channel 0 (Lower Channel)	2.402								
Channel 19 (Middle Channel)	2.440								
Channel 39 (upper Channel)	2.480								

1.5 Deviations from the Standard

Nil.

1.6 EUT Modification Record

No modifications were made.

1.7 Test Location(s)

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
No. 1 Science Park Drive, Singapore 118221

TÜV SÜD PSB Pte Ltd
Electrical & Electronics Centre (EEC), Product Services,
13 International Business Park #01-01, Singapore 609932



1.8 Test Facilities Registrations

Requirements	Registration Numbers
FCC	994109 (Test Firm Registration Number) SG0002 (Designation Number)
ISED	<u>Science Park</u> 2932I-1 (3m and 10m Semi-Anechoic Chamber) <u>International Business Park</u> 2932N-1 (10m Semi-Anechoic Chamber)
VCCI	<u>Science Park</u> R-1335 (10m ANC), G-29 (10m ANC) C-2306 (C.E @ Lab 3) T-1471 (Telecom Ports @ Lab 3) <u>International Business Park</u> R-3324 (10m ANC), G-203 (10mANC) C-4933 (C.E @ CEIBP) T-2403 (Telecom Ports @ CEIBP)
BSMI	SL2-IS-E-6001R [CNS-13803 (ISM Equipment)] SL2-IN-E-6001R [CNS-13438 (IT Equipment)] SL2-R1/R2-E-6001R [CNS-13439 (Broadcast Receivers)] SL2-A1-E-6001R [CNS-13783-1 (Household Appliances)] SL2-L1-E-6001R [CNS-14115 (Lighting Equipment)]
SABS	SABS/A-LAB/0029/2018



1.9 Supporting Equipment

Equipment Description (Including Brand Name)	Model, Serial & FCC ID Number	Cable Description (List Length, Type & Purpose)
Fujitsu LifeBook	M/N: S6410 S/N: R7Y00054 FCC ID: DoC	Nil
Fujitsu AC Adapter	M/N: CP293662-02 S/N: 06919569A FCC ID: DoC	1.80m unshielded power cable



2 Test Details

2.1 Conducted Emissions

2.1.1 Test Limits

Frequency Range (MHz)	Limit Values (dB μ V)	
	Quasi-peak (Q-P)	Average (AV)
0.15 - 0.5	66 – 56 *	56 – 46 *
0.5 - 5.0	56	46
5.0 - 30.0	60	50
* Decreasing linearly with the logarithm of the frequency		



2.1.2 Test Setup

- 2.1.2.1 The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
- 2.1.2.2 The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
- 2.1.2.3 The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
- 2.1.2.4 All other supporting equipment were powered separately from another LISN.

2.1.3 Test Method

- 2.1.3.1 The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.1.3.2 A scan was made on the NEUTRAL line over the required frequency range using an EMI test receiver.
- 2.1.3.3 High peaks, relative to the limit line, were then selected.
- 2.1.3.4 The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 9kHz. Both Quasi-peak and Average measurements were made.
- 2.1.3.5 The measurements were then repeated for the LIVE line .

Sample Calculation Example

At 20 MHz

Q-P limit = 60.0 dB μV

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.2 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μV

(Calibrated for system losses)

Therefore, Q-P margin = 60.0 - 40.0 = 20.0

i.e. 20.0 dB below Q-P limit

2.1.4 Test Results

Test Input Power	120V 60Hz	Temperature	22°C
Line Under Test	AC Mains	Relative Humidity	59%
Mode	Tx Channel 39 (2.48GHz) (Worst)	Atmospheric Pressure	1030mbar
		Tested By	Kelvin Cheng
		Test Date	12 Sep 2018

Frequency (MHz)	Q-P Value (dBμV)	Q-P Limit (dBμV)	Q-P Margin (dB)	AV Value (dBμV)	AV Limit (dBμV)	AV Margin (dB)	Line	Channel (Worst)
0.2623	40.5	61.4	20.9	29.6	51.4	21.8	N	39
1.8563	48.2	56.0	7.8	37.4	46.0	8.6	N	39
1.9364	45.8	56.0	10.2	36.3	46.0	9.7	L1	39
2.2497	39.1	56.0	16.9	33.8	46.0	12.2	L1	39
3.0566	34.5	56.0	21.5	30.4	46.0	15.6	L1	39
4.3095	33.5	56.0	22.5	24.5	46.0	21.5	L1	39

Notes

1.	All possible modes of operation were investigated from 150kHz to 30MHz. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2.	A "positive margin" indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a "negative margin" indicates a FAIL.
3.	EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings: <u>9kHz - 30MHz</u> RBW: 9kHz VBW: 30kHz

2.2 Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)

2.2.1 Test Limits

Frequency Range (MHz)	Quasi-Peak Limit Values (dBµV/m)
0.009 - 0.490 *	20 log [2400 / F (kHz)] @ 300m
0.490 - 1.705	20 log [24000 / F (kHz)] @ 30m
1.705 - 30.0	30.0 @ 30m
30 – 88	40.0 @ 3m
88 – 216	43.5 @ 3m
216 – 960	46.0 @ 3m
960 – 1000 *	54.0 @ 3m

* For frequency bands 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, average detector was used. A peak limit of 20dB above the average limit does apply.

Frequency Range (MHz)	Average Limit Values (dBµV/m)	Peak Limit Values (dBµV/m)
Above 1000	54.0 @ 3m	74.0 @ 3m

Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

2.2.2 Test Setup

- 2.2.2.1 The EUT and supporting equipment were set up in accordance with the requirements of the standard as shown in the setup photos.
- 2.2.2.2 The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
- 2.2.2.3 The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

2.2.3 Test Method

- 2.2.3.1 The EUT was switched on and allowed to warm up to its normal operating condition.
- 2.2.3.2 A prescan was carried out to pick the worst emission frequencies from the EUT. For EUT which is a portable device, the prescan was carried out by rotating the EUT through three orthogonal axes to determine which altitude and equipment arrangement produces such emissions.
- 2.2.3.3 The test was carried out at the selected frequency points obtained from the pre-scan. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - b. The EUT was then rotated to the direction that gave the maximum emission.
 - c. Finally, the antenna height was adjusted to the height that gave the maximum emission
- 2.2.3.4 A Quasi-peak measurement was made for that frequency point if it was less than or equal to 1GHz. For frequency point in range of 9kHz – 90kHz, 110kHz – 490kHz and above 1GHz, both Peak and Average measurements were carried out.
- 2.2.3.5 The measurements were repeated for the next frequency point, until all selected frequency points were measured.
- 2.2.3.6 The frequency range covered was from the lowest radio frequency signal generated from the EUT, without going below 9kHz to 10th harmonics of the EUT fundamental frequency, using the loop antenna for frequency below 30MHz, Bi-log antenna for frequencies from 30MHz up to 1GHz, and the Horn antenna above 1GHz.

Sample Calculation Example

At 300 MHz

Q-P limit = 46.0 dB μ V/m

Log-periodic antenna factor & cable loss at 300 MHz = 18.5 dB

Q-P reading obtained directly from EMI Receiver = 40.0 dB μ V/m

(Calibrated level including antenna factors & cable losses)

Therefore, Q-P margin = 46.0 - 40.0 = 6.0

i.e. 6.0 dB below Q-P limit

2.2.5 Test Results

Test Input Power	5Vdc	Temperature	22°C
Test Distance	3m (<30MHz) 3m (<30MHz) 3m (≥30MHz – 25GHz)	Relative Humidity	57%
Mode	Tx Channel 39 (2.48GHz) (Worst)	Atmospheric Pressure	1029mbar
		Tested By	Dylan Lin
		Test Date	17 Sep 2018

Spurious Emissions ranging from 9kHz – 30MHz (for 9kHz – 90kHz, 110kHz – 490kHz) *See Note 2 & 3

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Spurious Emissions ranging from 9kHz – 30MHz *See Note 2 & 3

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Spurious Emissions ranging from 30MHz – 1GHz

Frequency (MHz)	Q-P Value (dBμV/m)	Q-P Limit (dBμV/m)	Q-P Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Channel (Worst)
39.7970	26.7	40.0	13.3	100	213	V	39
59.3910	26.4	40.0	13.6	400	187	V	39
78.9850	28.8	40.0	11.2	298	321	V	39
93.6810	26.0	43.5	17.5	100	246	V	39
159.8100	25.7	43.5	17.8	100	19	V	39
172.0570	26.3	43.5	17.2	100	3	V	39

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.0000	38.1	74.0	35.9	26.7	54.0	27.3	300	275	V	0
1.0404	37.6	74.0	36.4	24.9	54.0	29.1	300	116	V	0
1.0758	36.7	74.0	37.3	24.5	54.0	29.5	399	324	V	0
1.1667	36.5	74.0	37.5	22.7	54.0	31.3	300	0	V	0
1.8434	35.7	74.0	38.3	27.2	54.0	26.8	300	309	V	0
2.1262	35.1	74.0	38.9	31.3	54.0	22.7	399	131	V	0

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.5005	42.4	74.0	31.6	28.8	54.0	25.2	399	70	H	19
1.7272	40.0	74.0	34.0	33.7	54.0	20.3	200	166	V	19
1.8686	42.3	74.0	31.7	28.8	54.0	25.2	101	70	V	19
2.1211	44.5	74.0	29.5	35.2	54.0	18.8	399	26	V	19
3.7876	44.5	74.0	29.5	33.9	54.0	20.1	100	96	H	19
4.8835	48.5	74.0	25.5	41.8	54.0	12.2	199	316	H	19

Spurious Emissions above 1GHz – 25GHz

Freq (GHz)	Peak Value (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Azimuth (Degrees)	Pol (H/V)	Ch
1.1406	32.0	74.0	42.0	25.8	54.0	28.2	300	249	V	39
1.8539	35.7	74.0	38.3	27.1	54.0	26.9	300	326	V	39
1.2218	40.4	74.0	33.6	34.9	54.0	19.1	399	117	V	39
2.6242	40.3	74.0	33.7	38.5	54.0	15.5	200	144	H	39
4.9404	51.6	74.0	22.4	46.2	54.0	7.8	200	60	H	39
7.4848	46.9	74.0	27.1	39.8	54.0	14.2	399	347	V	39

Notes

1.	All possible modes of operation were investigated. Only the worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2.	“--” indicates no emissions were found and shows compliance to the limits
3.	The measurement was done at 3m. The measured results were extrapolated to the specified test limits as specified in § 15.209 (a) based on 40dB/decade.
4.	Quasi-peak measurement was used for frequency measurement up to 1GHz. Average and peak measurements were used for emissions above 1GHz. The average measurement was done by averaging over a complete cycle of the pulse train, including the blanking interval as the pulse train duration does not exceed 0.1 second.
5.	A “positive margin” indicates a PASS as it refers to the margin present below the limit line at the particular frequency. Conversely, a “negative margin” indicates a FAIL.
6.	EMI receiver Resolution Bandwidth (RBW) and Video Bandwidth (VBW) settings: <u>30MHz - 1GHz</u> RBW: 120kHz VBW: 1MHz <u>>1GHz</u> RBW: 1MHz VBW: 3MHz
7.	The upper frequency of radiated emission investigations was according to requirements stated in Section 15.33 (a) for intentional radiators & Section 15.33 (b) for unintentional radiators.
8.	The channel in the table refers to the transmit channel of the EUT.

2.3 Spectrum Bandwidth (6db Bandwidth Measurement)

2.3.1 Test Limits

The EUT shows compliance to the requirements of this section, which states that the minimum bandwidth of the EUT employing digital modulation techniques shall be at least 500kHz.

2.3.2 Test Setup

- 2.3.2.1 The EUT and supporting equipment were set up as shown in the set up photo.
- 2.3.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.3.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
- 2.3.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 3 times of RBW.
- 2.3.2.5 All other supporting equipment were powered separately from another filtered mains.

2.3.3 Test Method

- 2.3.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.
- 2.3.3.2 The center frequency of the spectrum analyser was set to the transmitting frequency with the frequency span wide enough to capture the 6dB bandwidth of the transmitting frequency.
- 2.3.3.3 The spectrum analyser was set to max hold to capture the transmitting frequency. The signal capturing was continuous until no further changes were observed.
- 2.3.3.4 The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser. The frequencies below the 6dB peak frequency at lower (f_L) and upper (f_H) sides of the transmitting frequency were marked and measured by using the marker-delta function of the spectrum analyser.
- 2.3.3.5 The 6dB bandwidth of the transmitting frequency is the frequency difference between the marked lower and upper frequencies, $|f_H - f_L|$.
- 2.3.3.6 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.3.3.7 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively.




2.3.4 Test Results

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	1 – 3	Relative Humidity	57%
Antenna	0	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	05 Sep 2018



Channel	Channel Frequency (GHz)	6dB Bandwidth (MHz) *See Note 1	Limit (kHz)
Lower	2.402	0.728	≥ 500
Middle	2.440	0.662	≥ 500
Upper	2.480	0.735	≥ 500

Notes


1.	Only the largest measured bandwidths were reported. Refer to plots for all measured bandwidth.
----	--

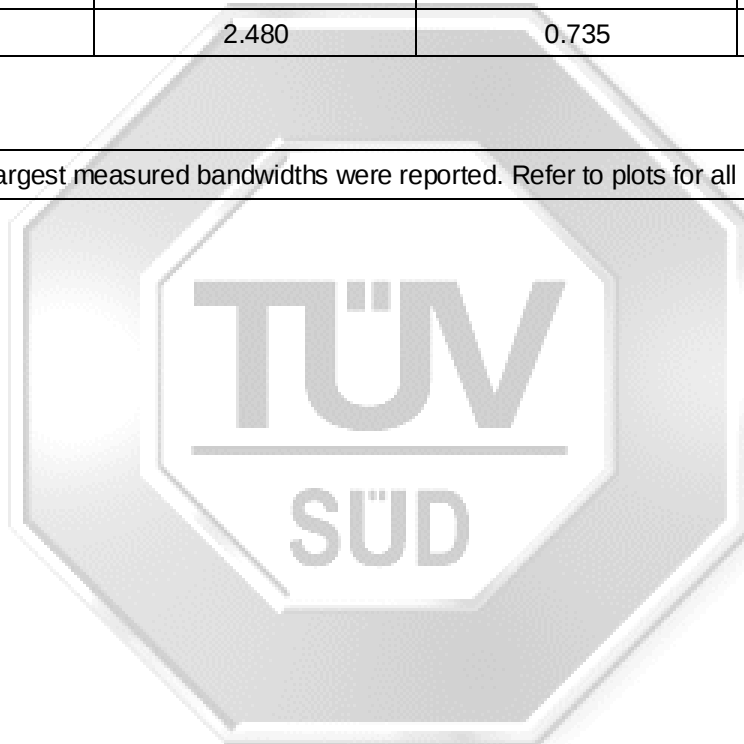

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots

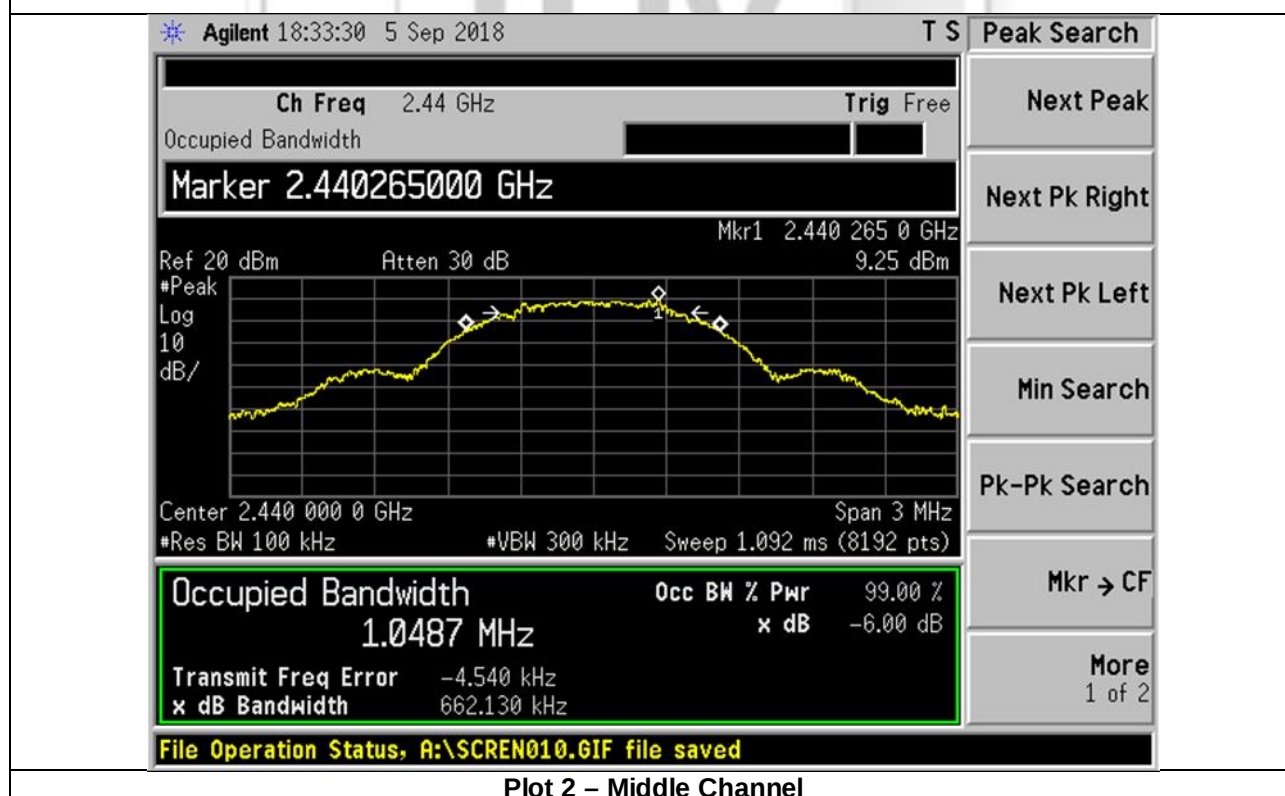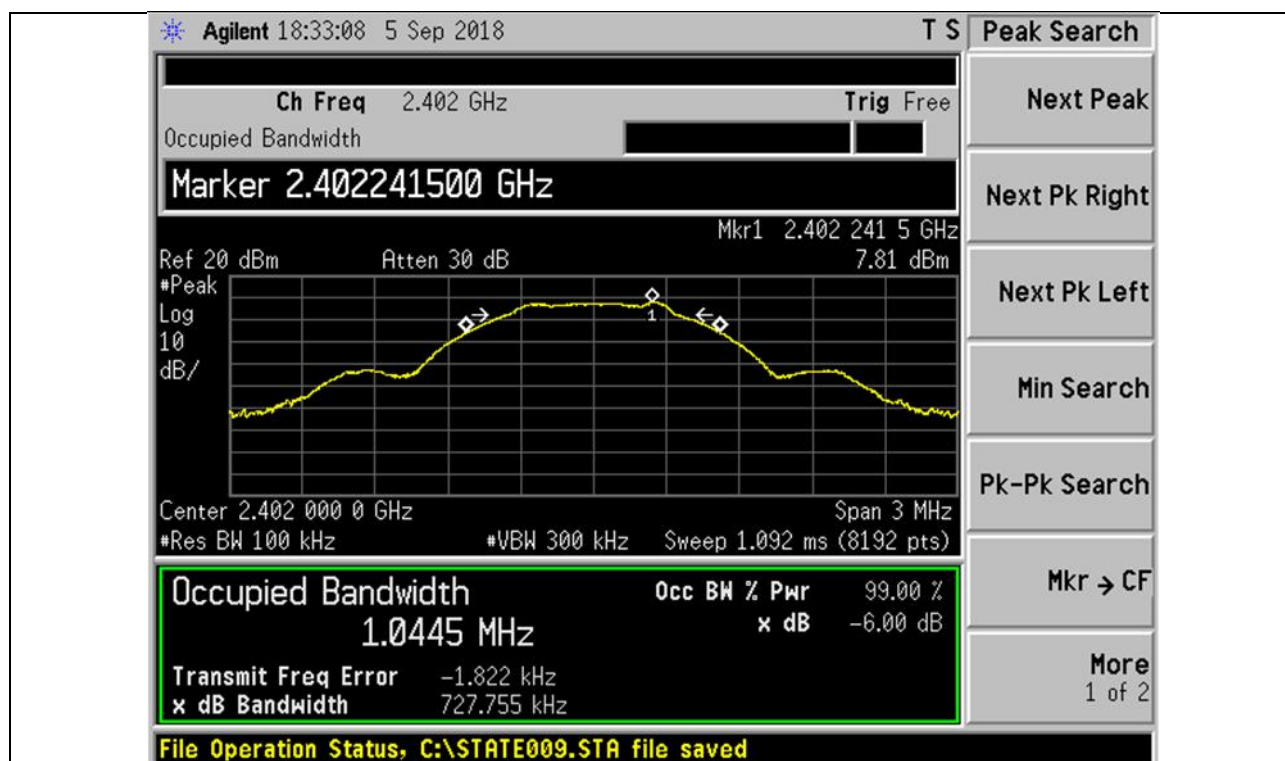

Spectrum Bandwidth (6dB Bandwidth Measurement) Plots

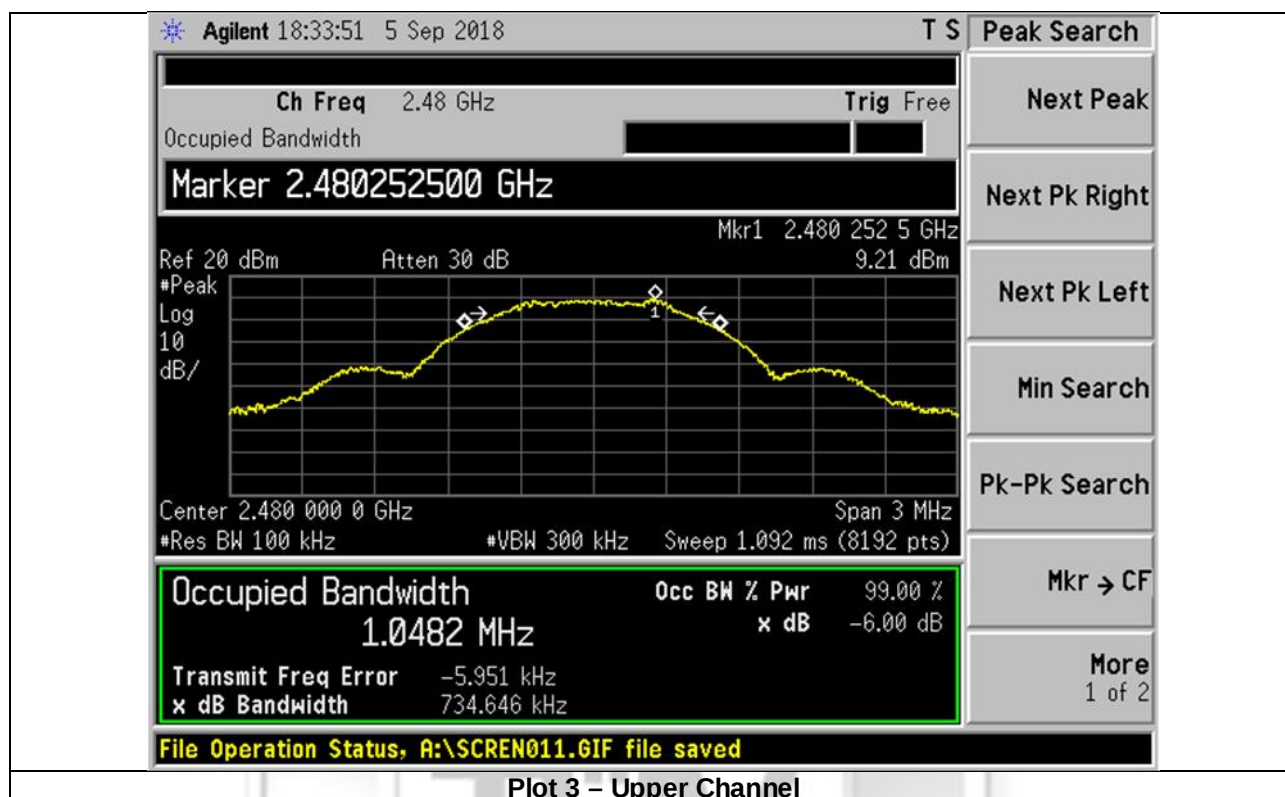

2.4 Maximum Peak Power

2.4.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the maximum peak power of the EUT employing digital modulation shall not exceed 1W (30dBm).

2.4.2 Test Setup

- 2.4.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.4.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.4.2.3 The RF antenna connector was connected to a power meter.
- 2.4.2.4 All other supporting equipment were powered separately from another filtered mains.

2.4.3 Test Method

- 2.4.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.
- 2.4.3.2 The maximum peak power of the transmitting frequency was detected and recorded.
- 2.4.3.3 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.4.3.4 The measurement was repeated with the transmitting frequency was set to middle channel and upper channel respectively.




2.4.4 Test Results

Test Input Power	5Vdc	Temperature	27°C
Antenna Gain	3.4 dBi	Relative Humidity	55%
		Atmospheric Pressure	27mbar
		Tested By	Chelmin Li
		Test Date	18 Sep 2018

Channel	Channel Frequency (GHz)	Maximum Peak Power (W) *See Note 1	Limit (W)
Lower	2.402	0.0060	1.0
Middle	2.440	0.0058	1.0
Upper	2.480	0.0051	1.0

Notes

1.	Only the highest measured peak power were reported.
----	---

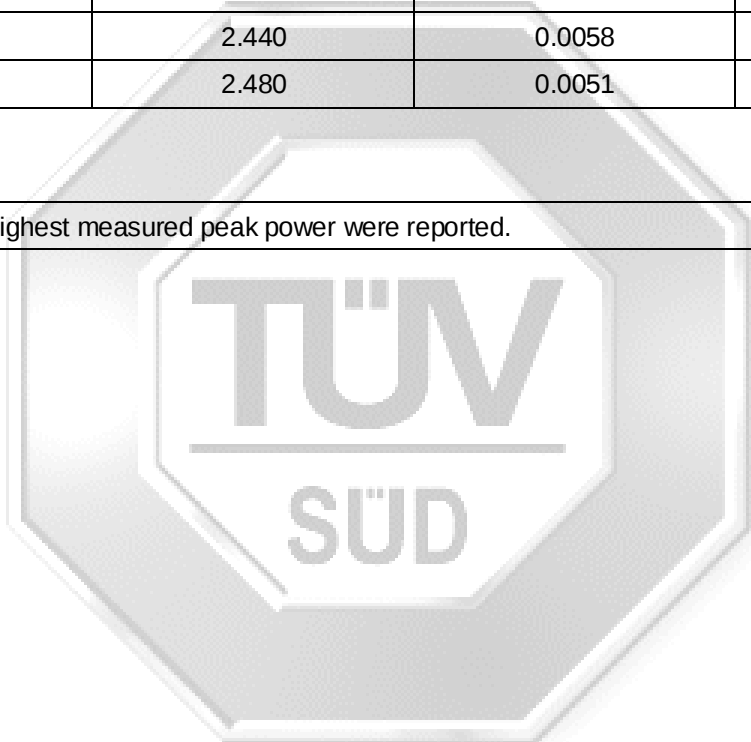

2.5 RF Conducted Spurious Emissions (Non-Restricted Bands)

2.5.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

2.5.2 Test Setup

- 2.5.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.5.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.5.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
- 2.5.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 3 times of RBW.
- 2.5.2.5 All other supporting equipment were powered separately from another filtered mains.

2.5.3 Test Method

- 2.5.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with transmitting frequency at lower channel.
- 2.5.3.2 The start and stop frequencies of the spectrum analyser were set to 30MHz and 10GHz.
- 2.5.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
- 2.5.3.4 The measurements were repeated with frequency span was set from 10GHz to 25GHz.
- 2.5.3.5 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.5.3.6 The measurements were repeated with the transmitting frequency was set to middle channel and upper channel respectively.


2.5.4 Test Results

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	4 – 9	Relative Humidity	57%
Antenna	0	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	05 Sep 2018


All spurious signals found were below the specified limit. Please refer to the attached plots.



RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

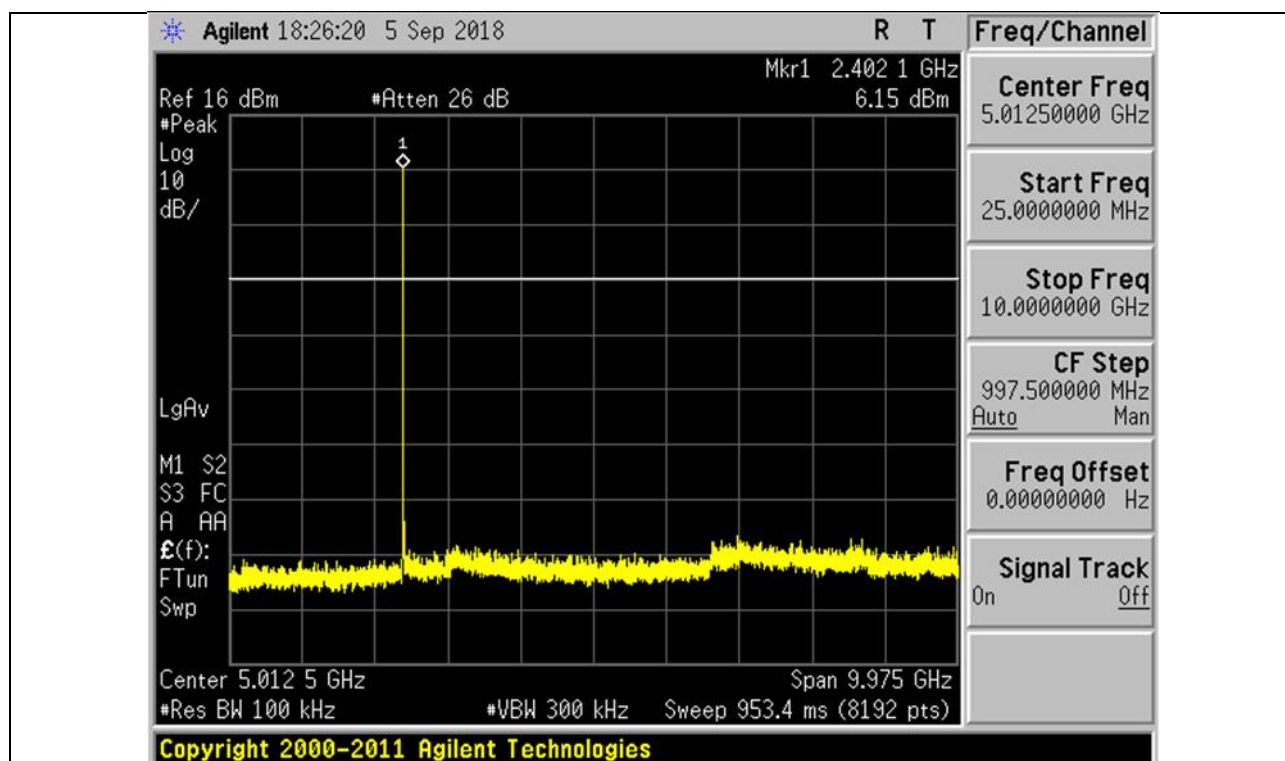


Plot 4 – Lower Channel

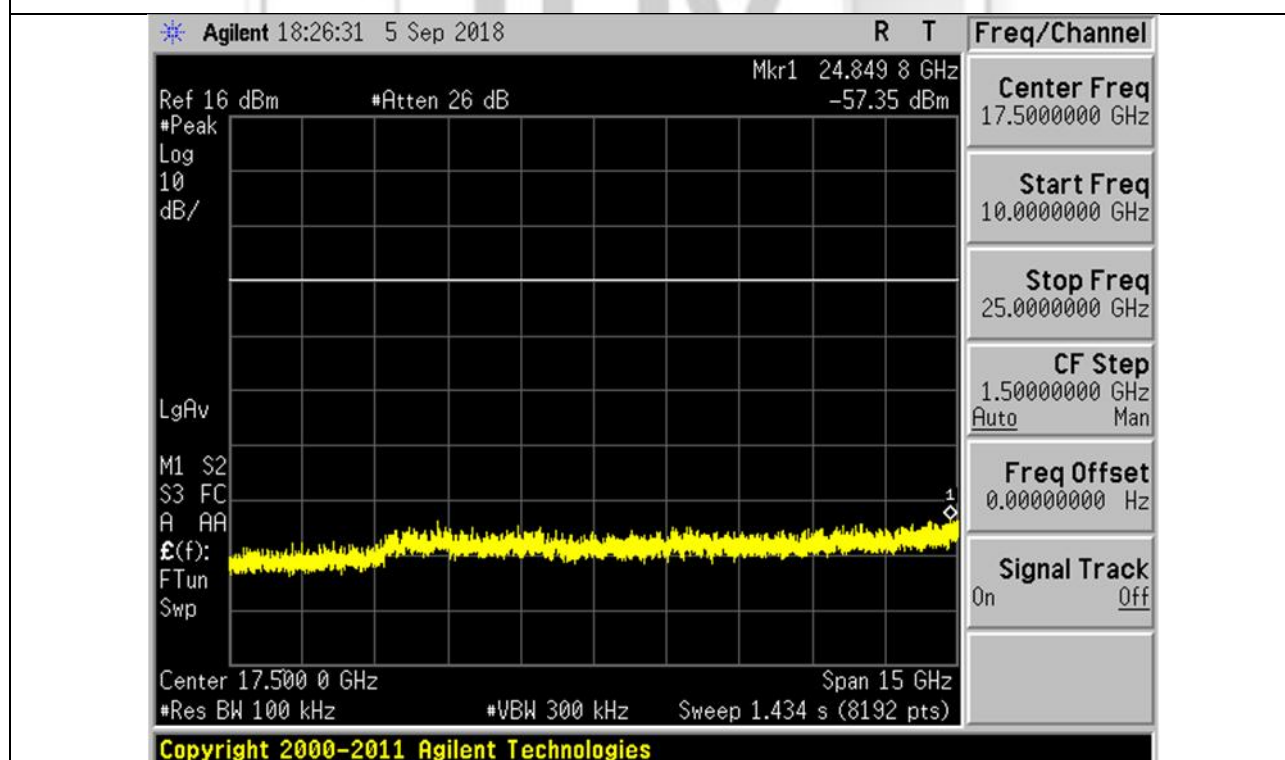


Plot 5 – Lower Channel

RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

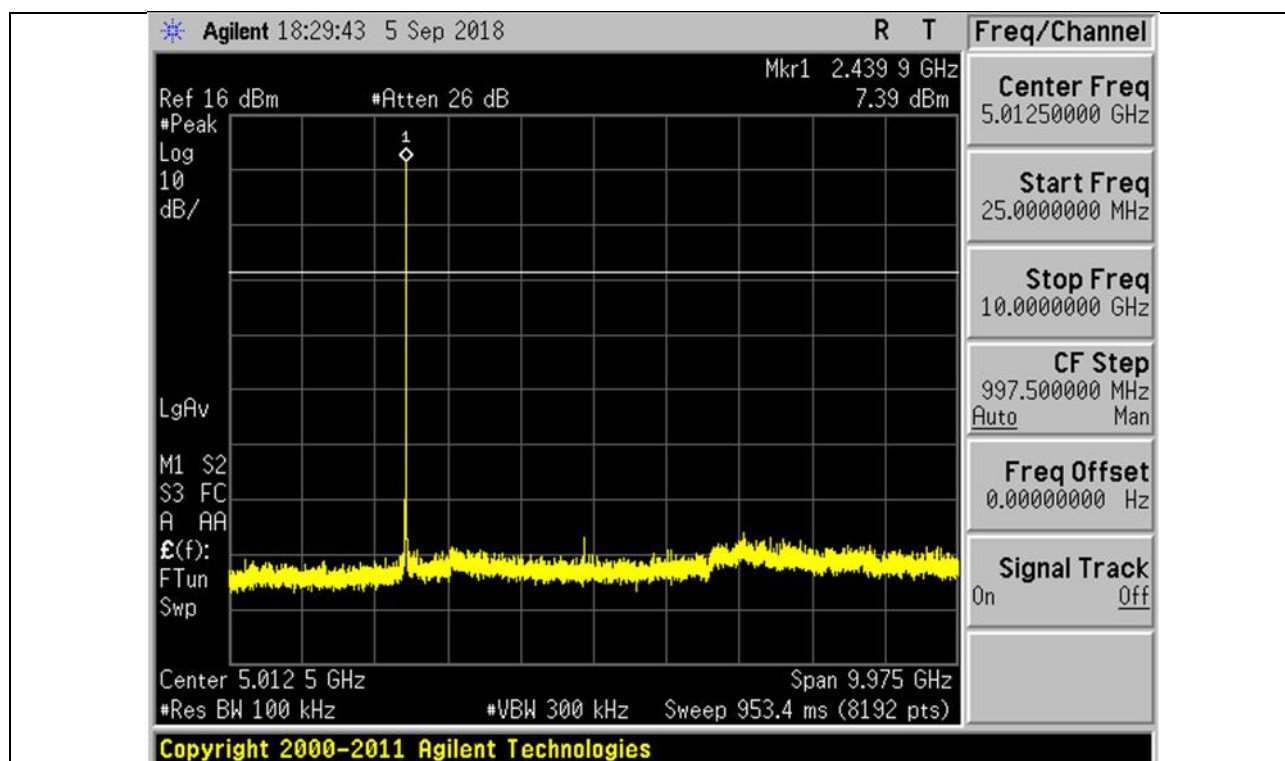


Plot 6 – Middle Channel

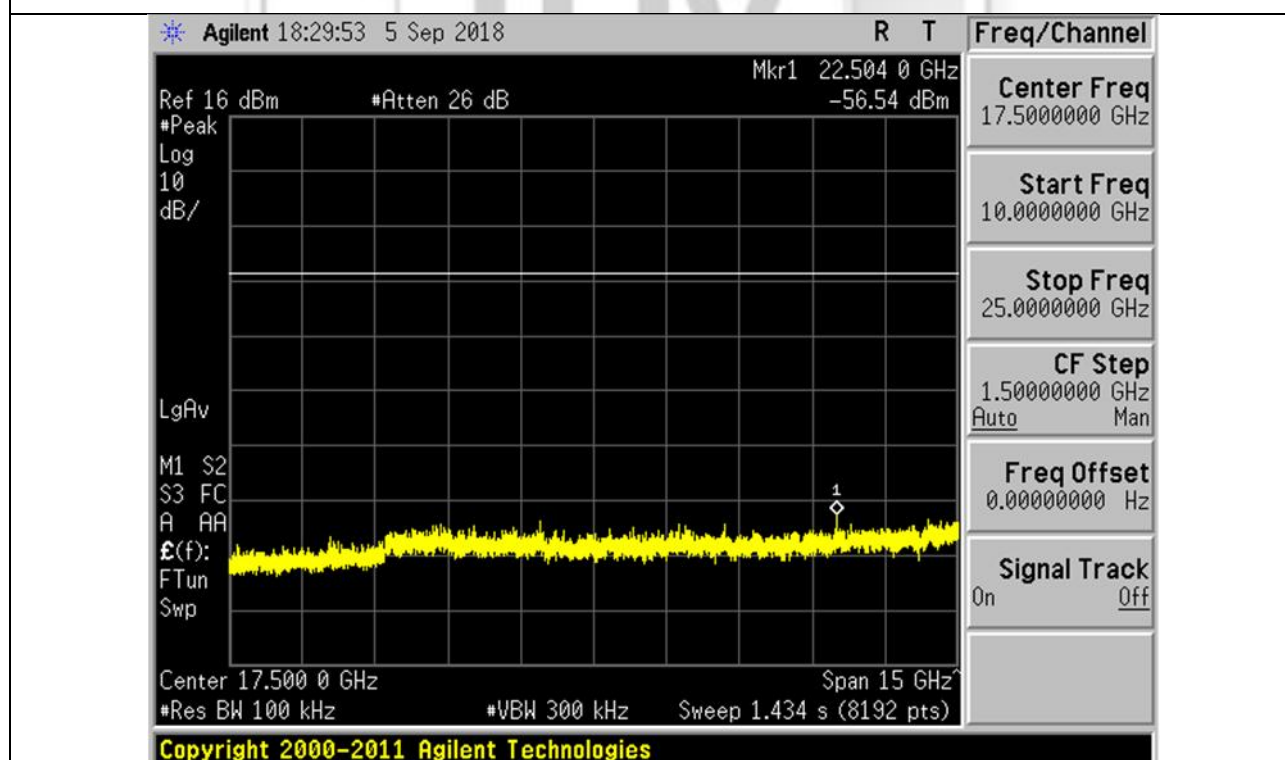


Plot 7 – Middle Channel

RF Conducted Spurious Emissions (Non-Restricted Bands) Plots

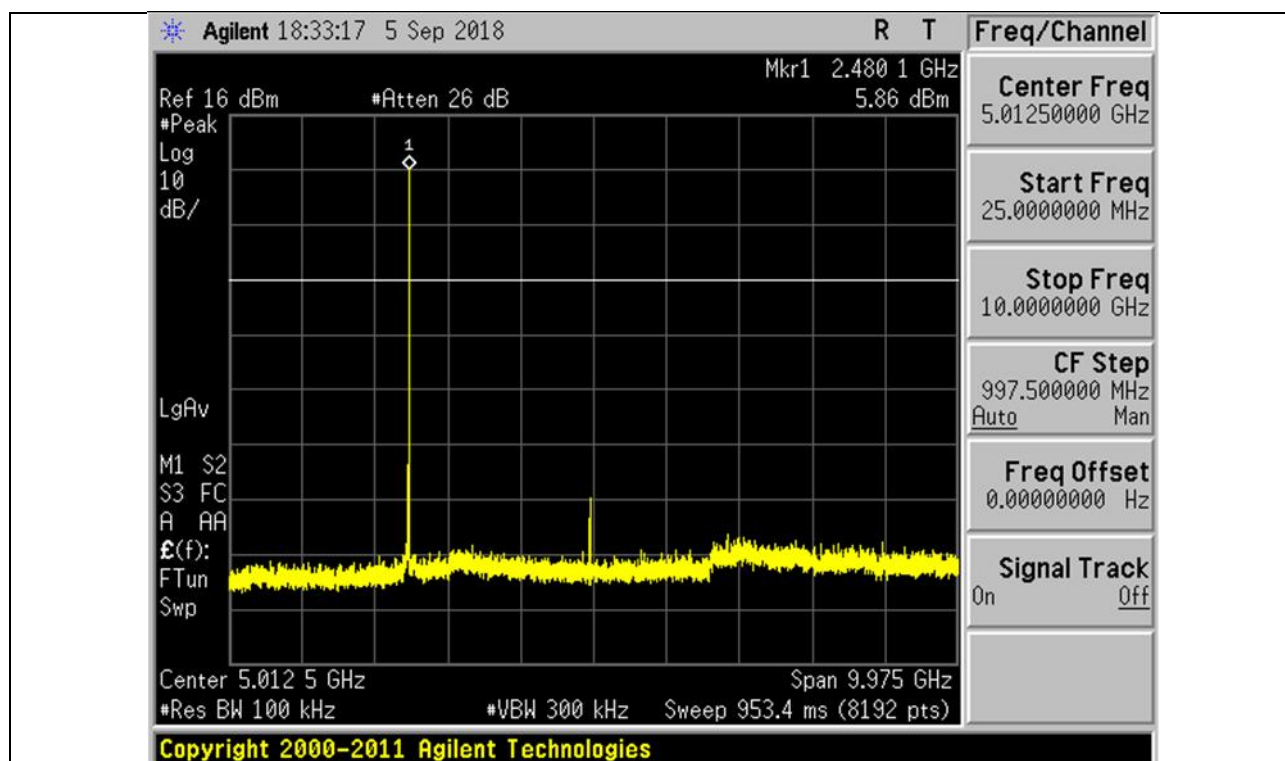

Plot 8 - Upper Channel

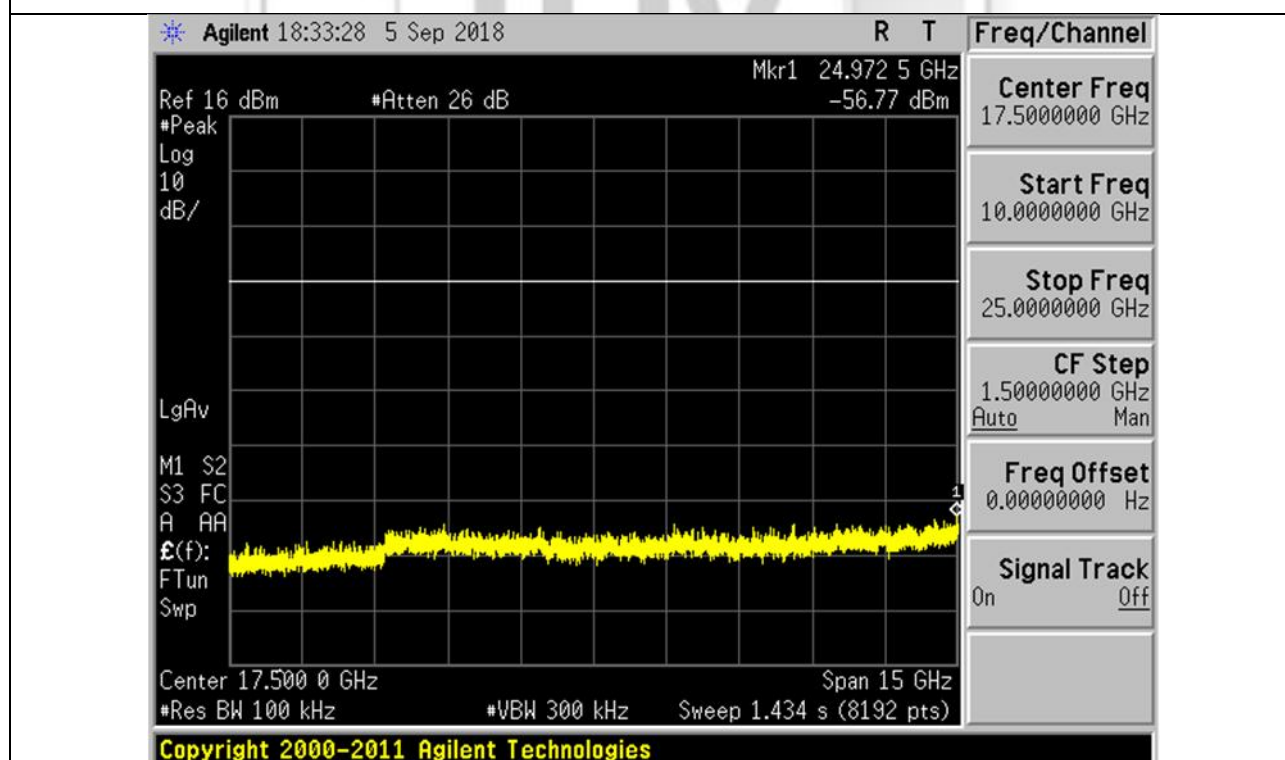

Plot 9 - Upper Channel

2.6 RF Conducted Spurious Emissions (Restricted Bands)

2.6.1 Test Limits

The EUT shows compliance to the requirements of this section, which states that emissions which fall in the restricted bands must comply with the radiated emission limits specified in the table below:

Frequency Range (MHz)	EIRP (dBm)	Radiated Emissions (dBμV/m)
0.009 – 0.490	-6.7 – (-41.4) **	67.6 – 20logF* @ 300m **
0.490 – 1.705	-41.4 – (-52.3) **	87.6 – 20logF* @ 30m **
1.705 – 30	-45.7	29.5 @ 30m
30 - 88	-55.2	40.0 @ 3m
88 - 216	-51.7	43.5 @ 3m
216 - 960	-49.2	46.0 @ 3m
>960	-41.2 ***	54.0 @ 3m ***
* F is frequency in kHz.		
** Decreasing linearly with the logarithm of the frequency.		
*** Above 1GHz, a peak limit of 20dB above the average limit does apply.		

47 CFR FCC Part 15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6
13.36 - 13.41			

2.6.2 Test Setup

- 2.6.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.6.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.6.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
- 2.6.2.4 The resolution bandwidth (RBW) of the spectrum analyser was set to the following settings. The video bandwidth (VBW) was set to at least three times of the RBW.

Frequency (MHz)	RBW (kHz)
0.009 – 0.150	0.2
0.150 – 30.0	9.0
30.0 - 1000	100.0
> 1000	1000.0

- 2.6.2.5 The detector of the spectrum analyser was set to peak detection mode.
- 2.6.2.6 All other supporting equipment were powered separately from another filtered mains.


2.6.3 Test Method

Measurement in the range 9kHz – 1000MHz

- 2.6.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with the transmitting frequency was set to lower channel.
- 2.6.3.2 The start and stop frequencies of the spectrum analyser were set according to the supported RBW.
- 2.6.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected. The antenna gain of the EUT was added to the captured spurious emissions.
- 2.6.3.4 No further measurement was required if all the captured emissions complied to the limits. Else, the spectrum analyser was set to zoom to the captured emission with the detector of the spectrum analyser was set to quasi-peak. The emission level of the captured frequency was measured.
- 2.6.3.5 The measurements were repeated until all the captured emissions which exceeding the limits were measured.
- 2.6.3.6 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.6.3.7 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively

Measurement above 1000MHz

- 2.6.3.8 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode, with the transmitting frequency was set to lower channel.
- 2.6.3.9 The start and stop frequencies of the spectrum analyser were set according to the supported frequency band of the set RBW with the number of points in a sweep was set to equal or greater than 2 times of the ratio of span over RBW.
- 2.6.3.10 The detector of the spectrum analyser was set to power average (RMS) mode with the sweep time was set to equal or greater than 10 times of the product of number of measurement points in a sweep and transmission symbol time.
- 2.6.3.11 The spectrum analyser was then allowed to capture any spurious emissions within a single sweep. The peak marker function of the spectrum analyser was used to locate the highest power level. The antenna gain of the EUT was added to the captured spurious emissions.
- 2.6.3.12 The measurements were repeated until all the required frequency bands were measured.
- 2.6.3.13 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.6.3.14 The measurements were repeated with the transmitting frequency was set to middle and upper channel respectively.
- 2.6.3.15 The measurements were repeated with the detector of the spectrum analyser was set to peak detecting mode. The sweep time was set to auto coupler.

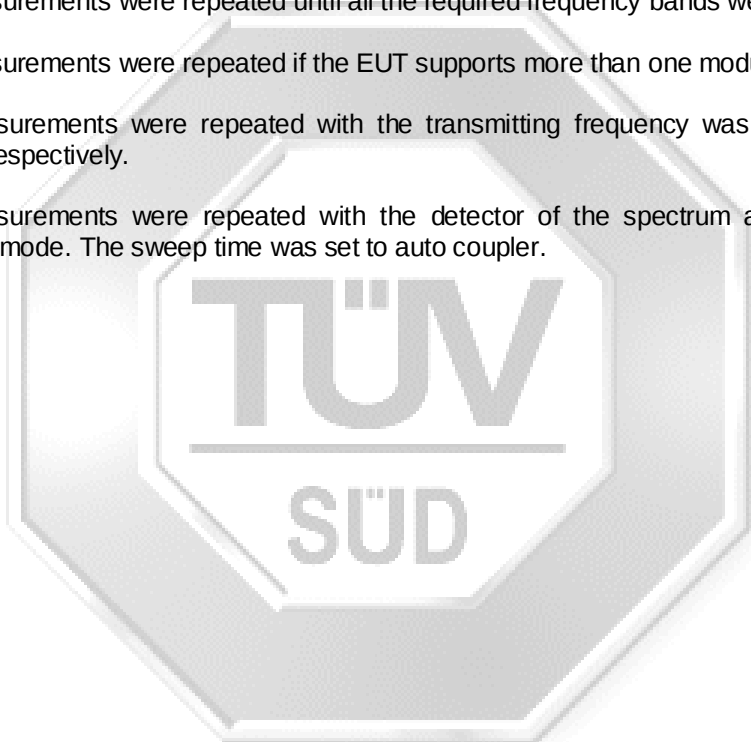




2.6.4 Test Results

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	10 – 27 (Peak)	Relative Humidity	57%
Antenna	0	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	12 Jul 2018


All spurious signals found were below the specified limit. Please refer to the attached plots.



RF Conducted Spurious Emissions (Restricted Bands) Plots

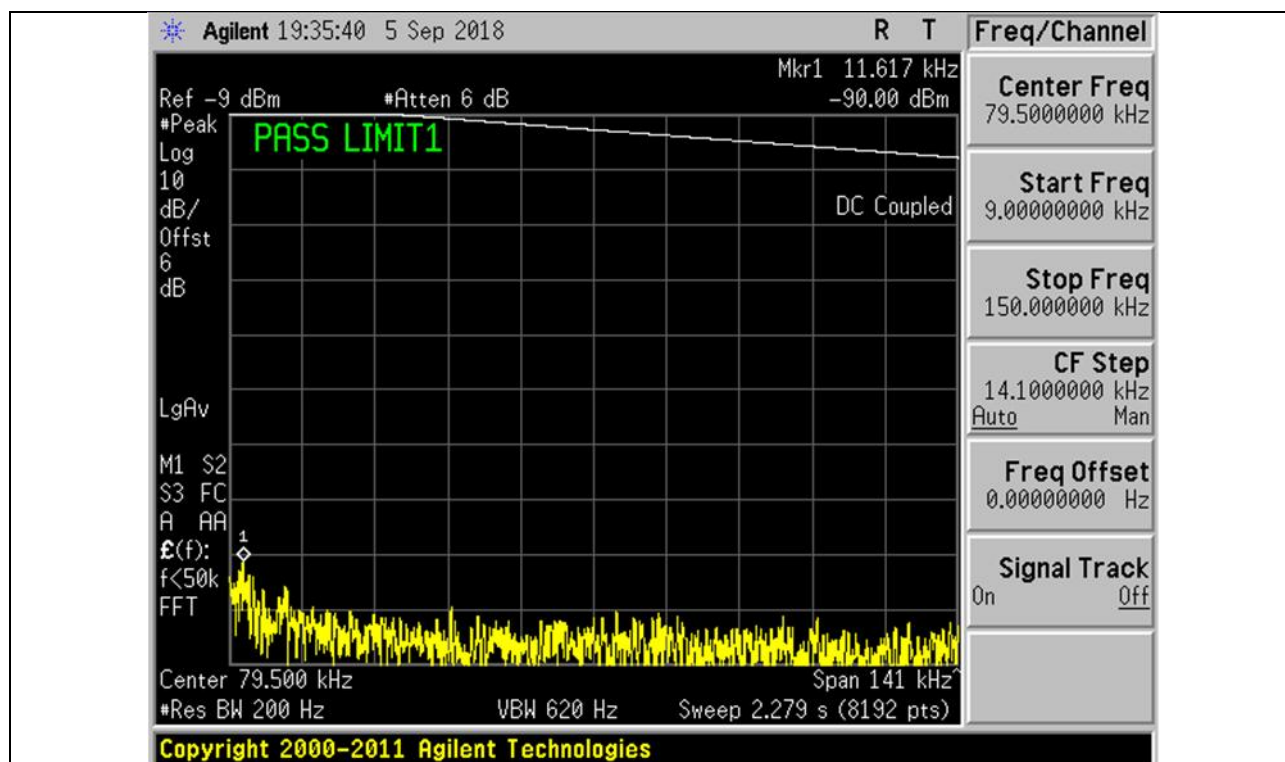


Plot 10 - Lower Channel

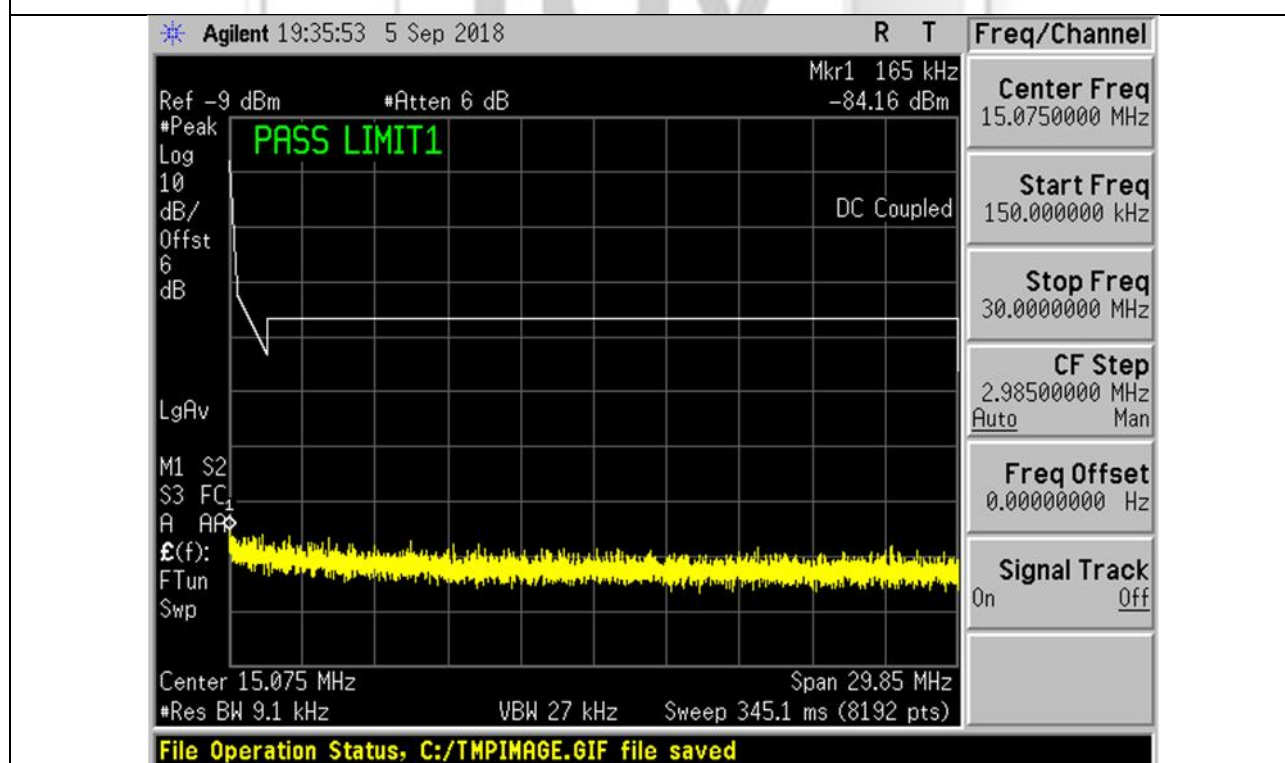


Plot 11 - Lower Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

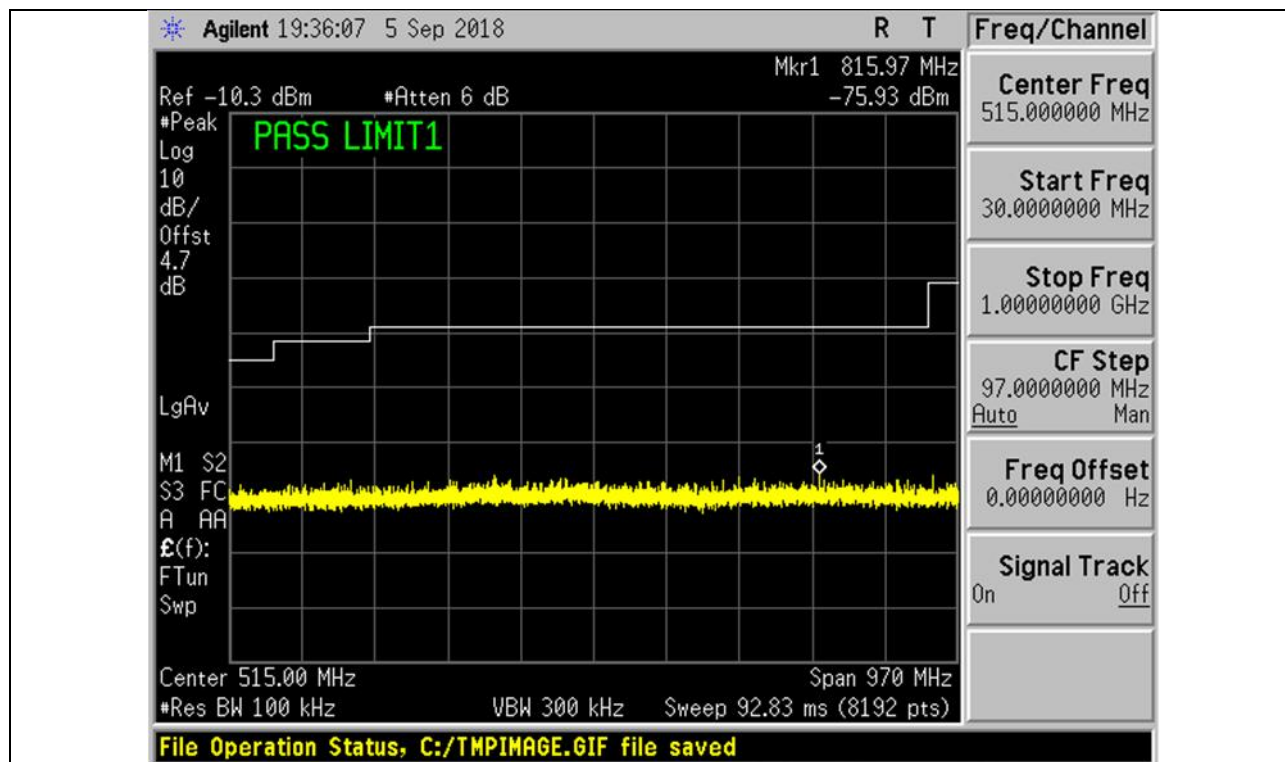


Plot 12 – Lower Channel

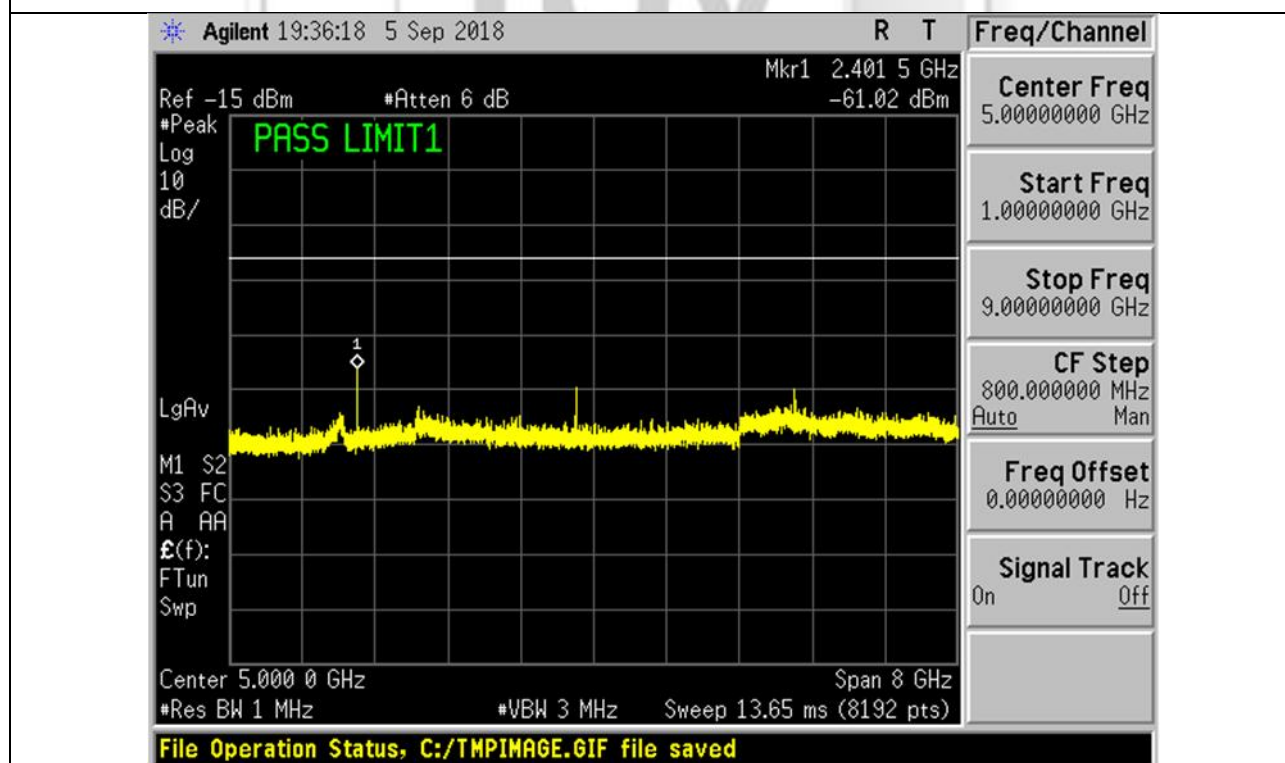


Plot 13 – Lower Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

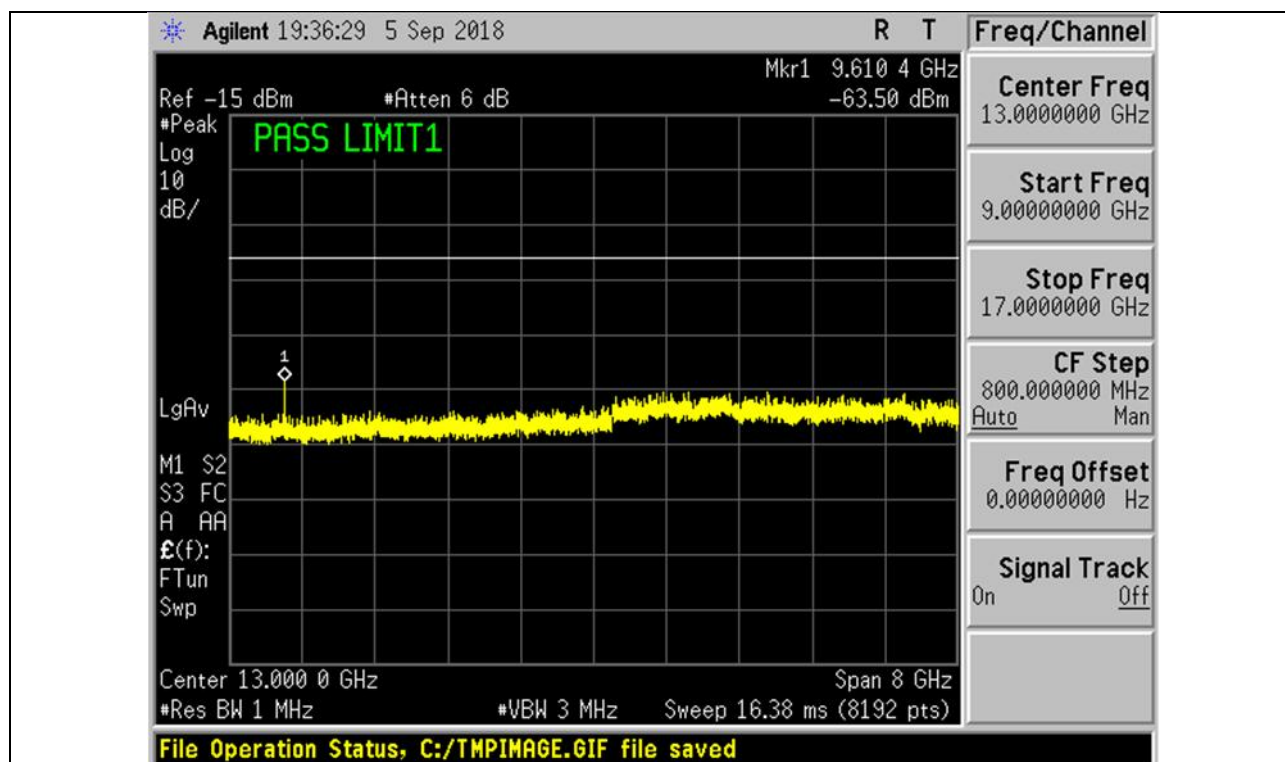


Plot 14 - Lower Channel

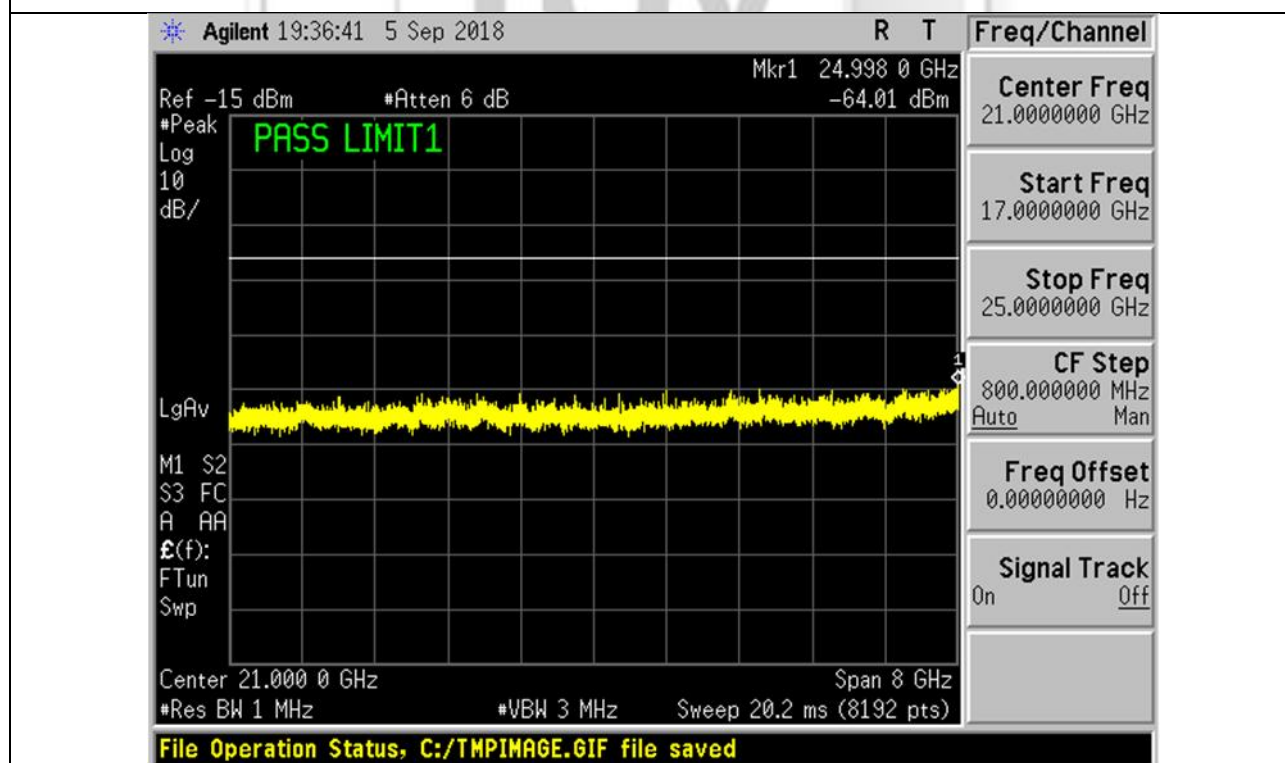


Plot 15 - Lower Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

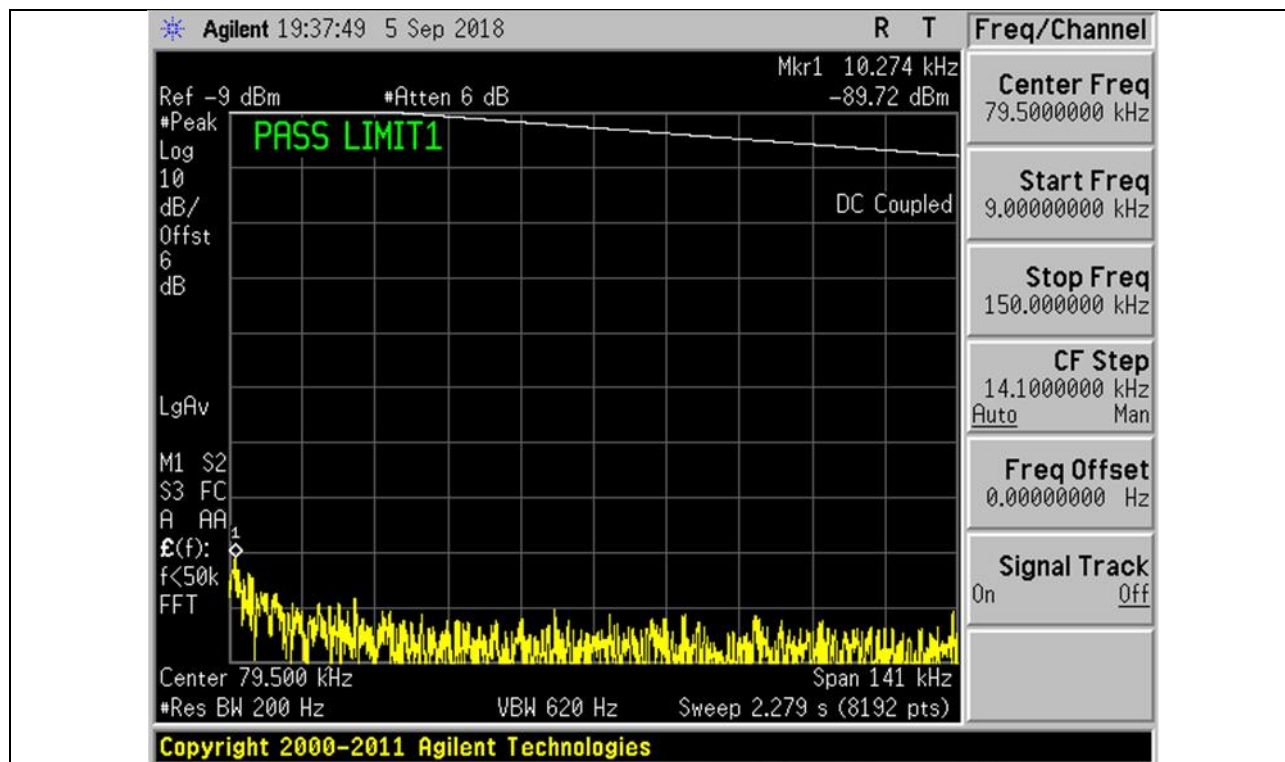


Plot 16 - Middle Channel

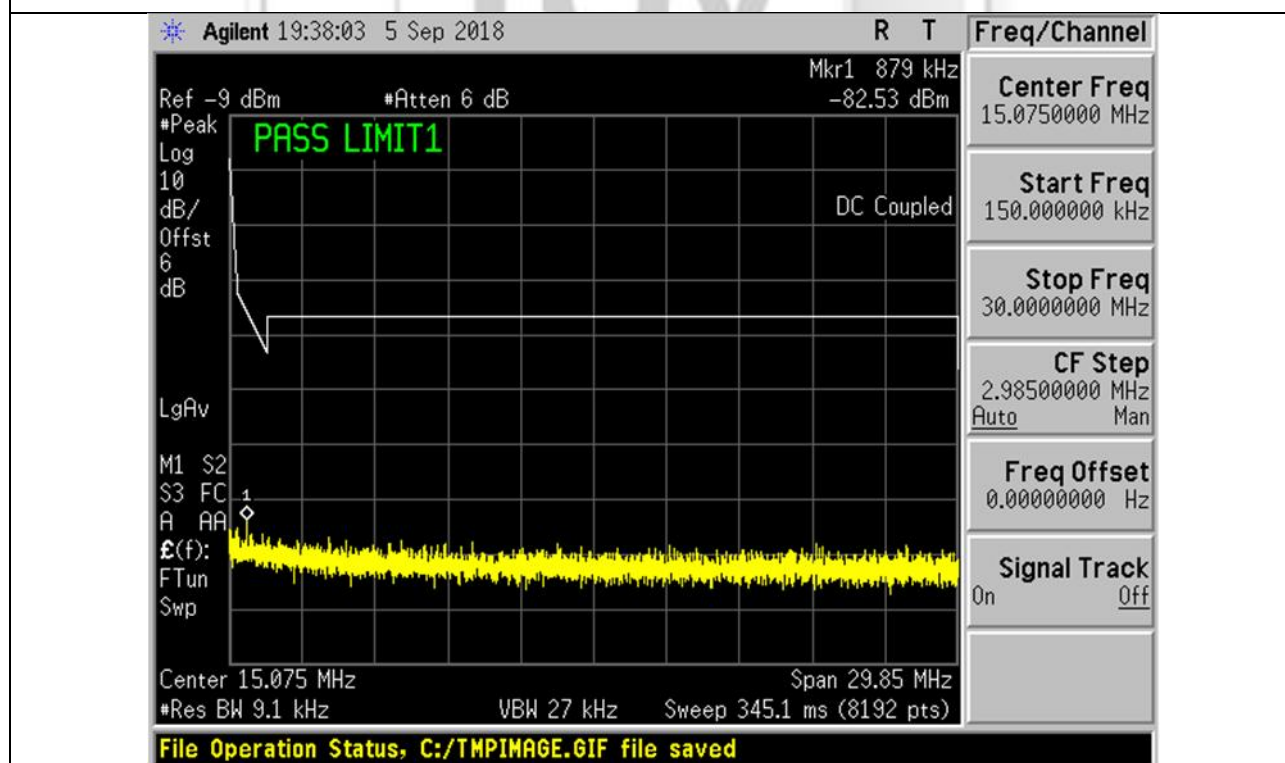


Plot 17 - Middle Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

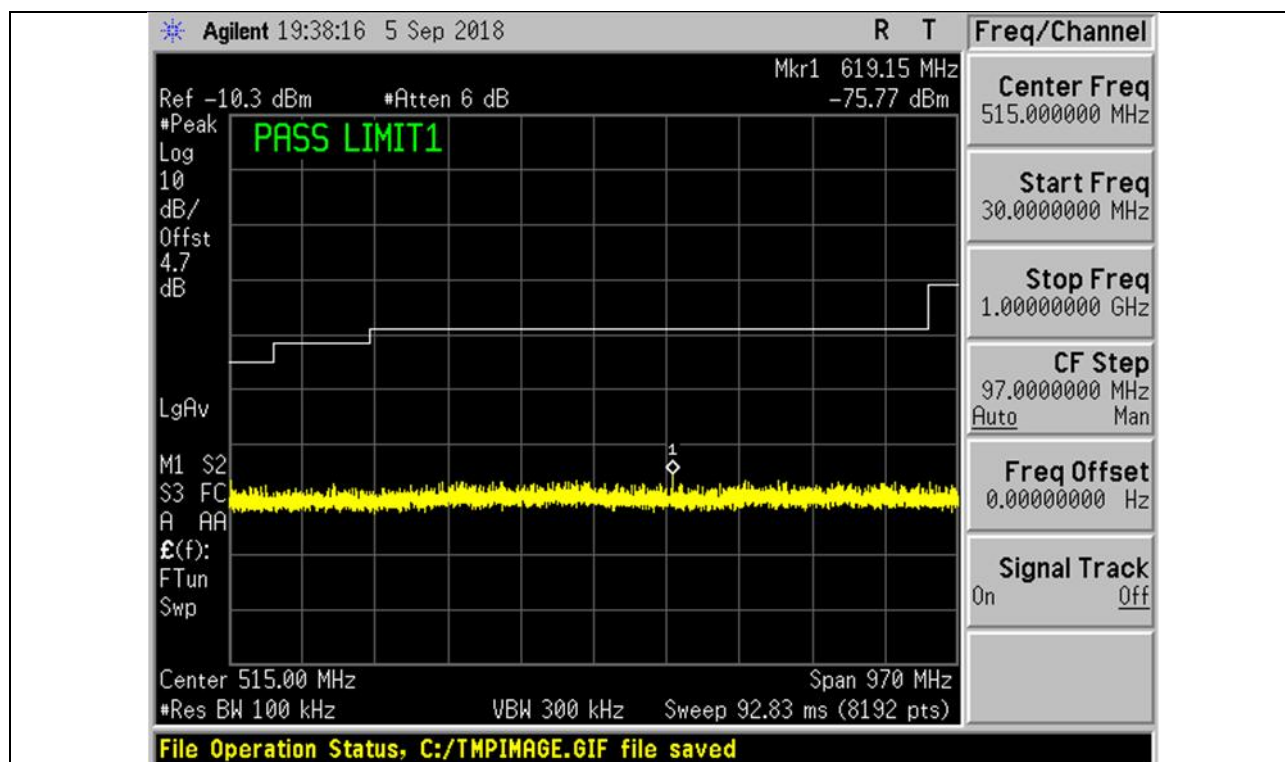


Plot 18 - Middle Channel

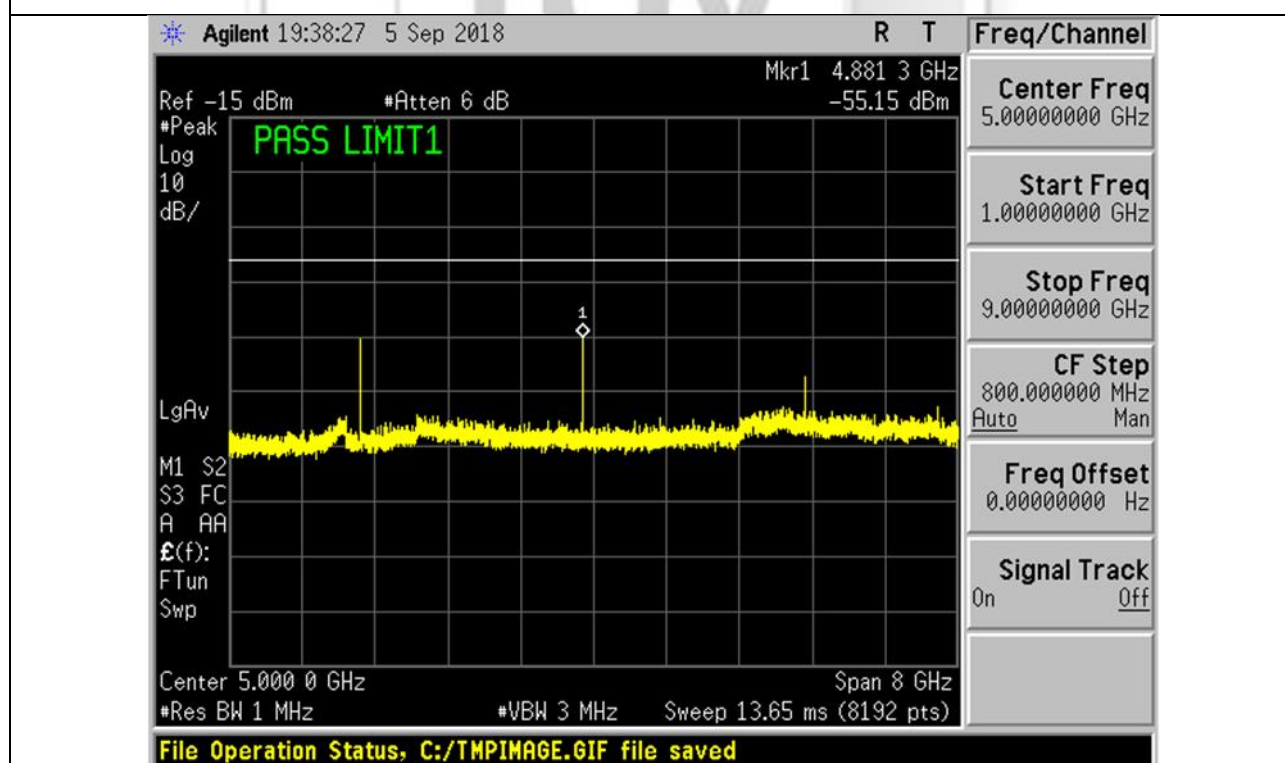


Plot 19 - Middle Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

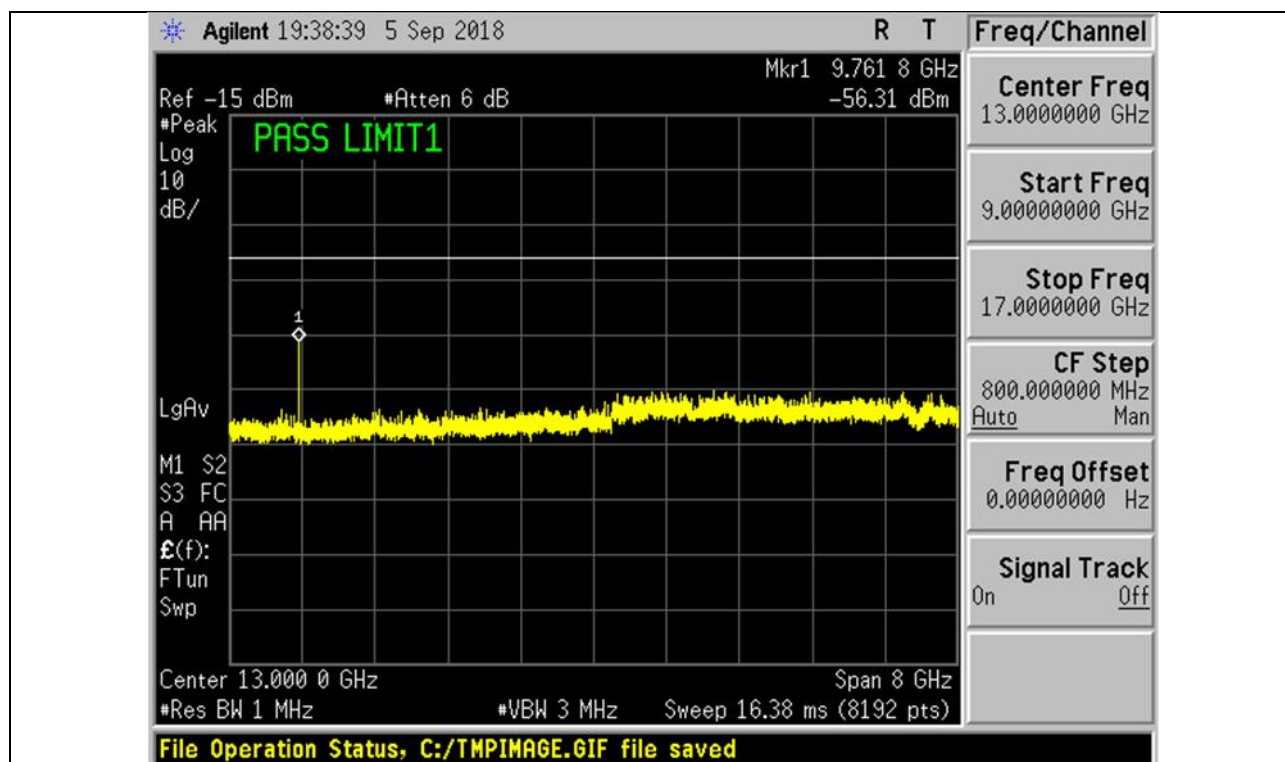


Plot 20 - Middle Channel

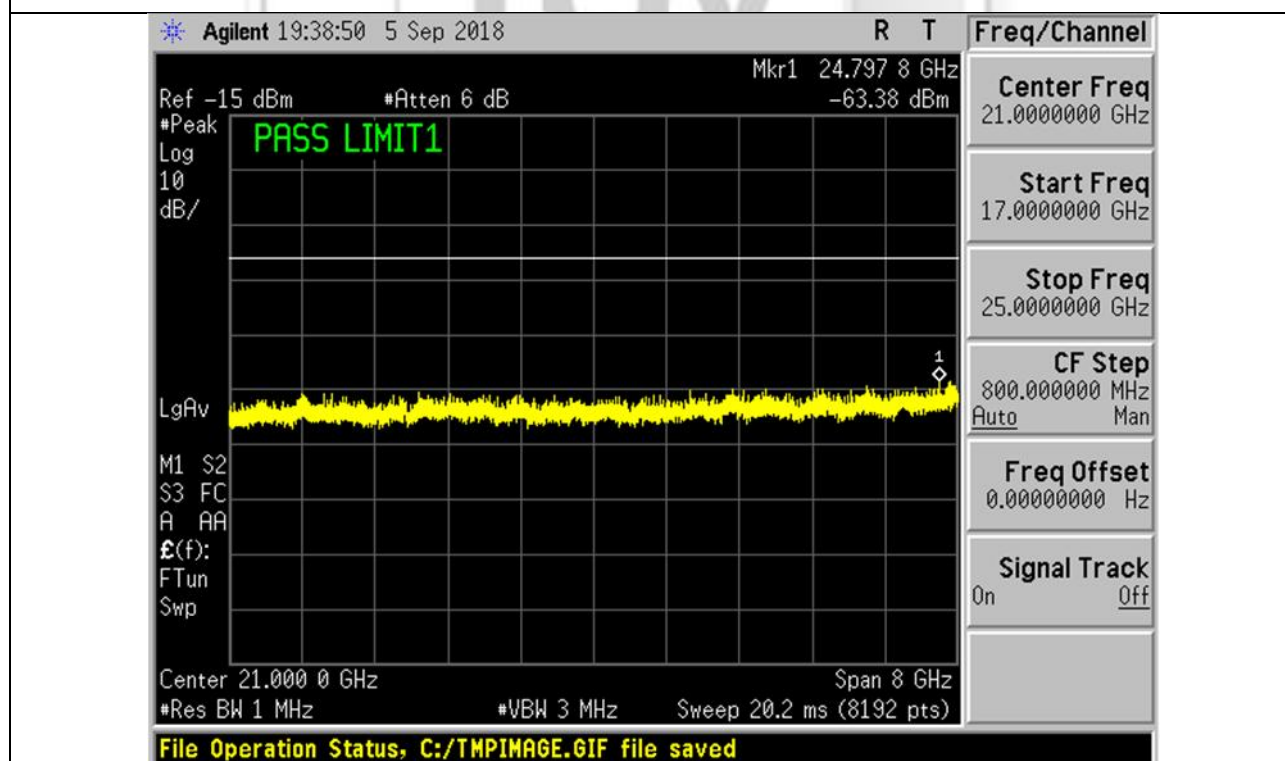


Plot 21 - Middle Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

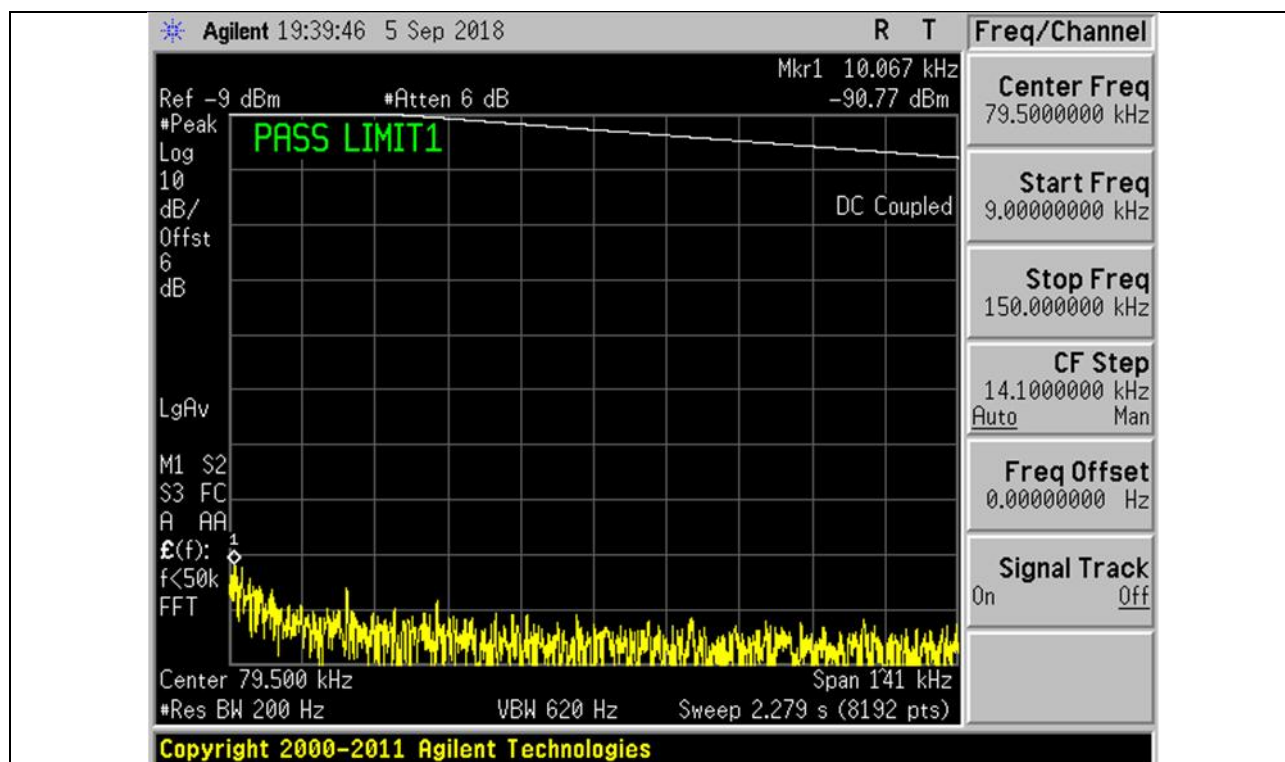


Plot 22 - Upper Channel

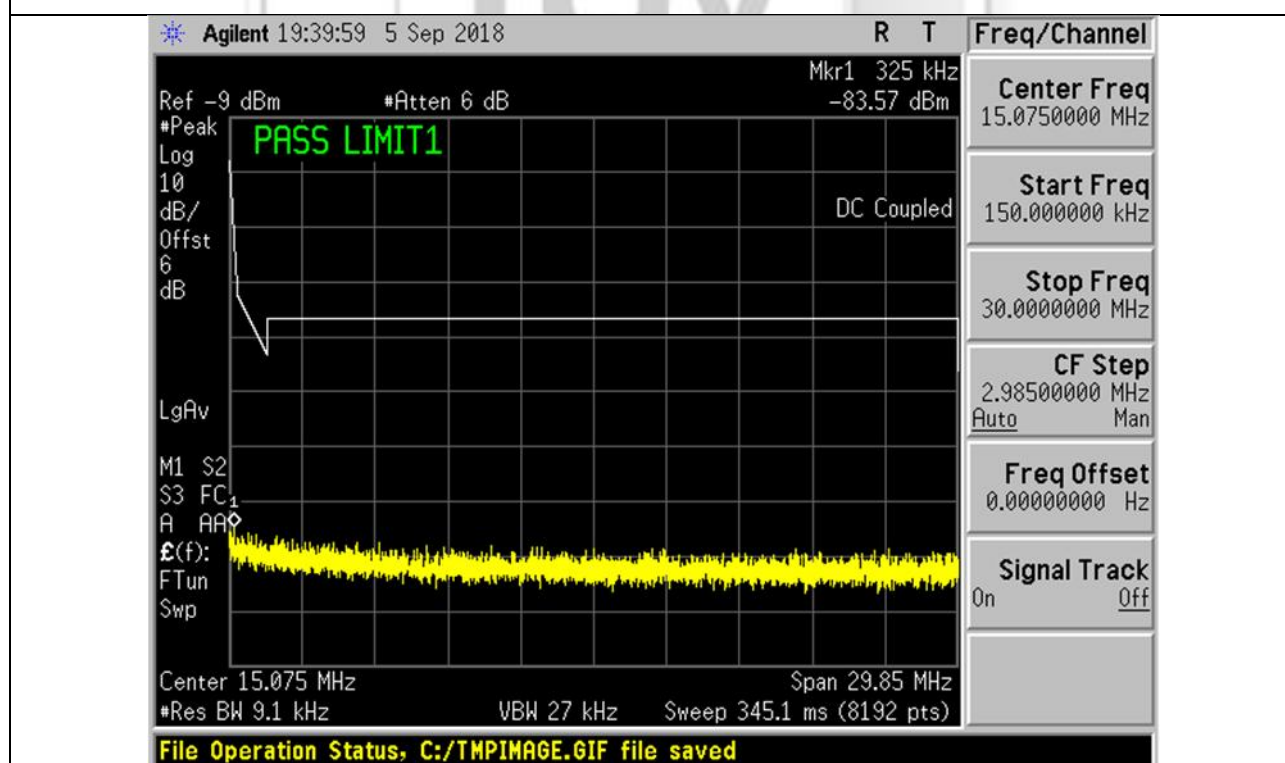


Plot 23 - Upper Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

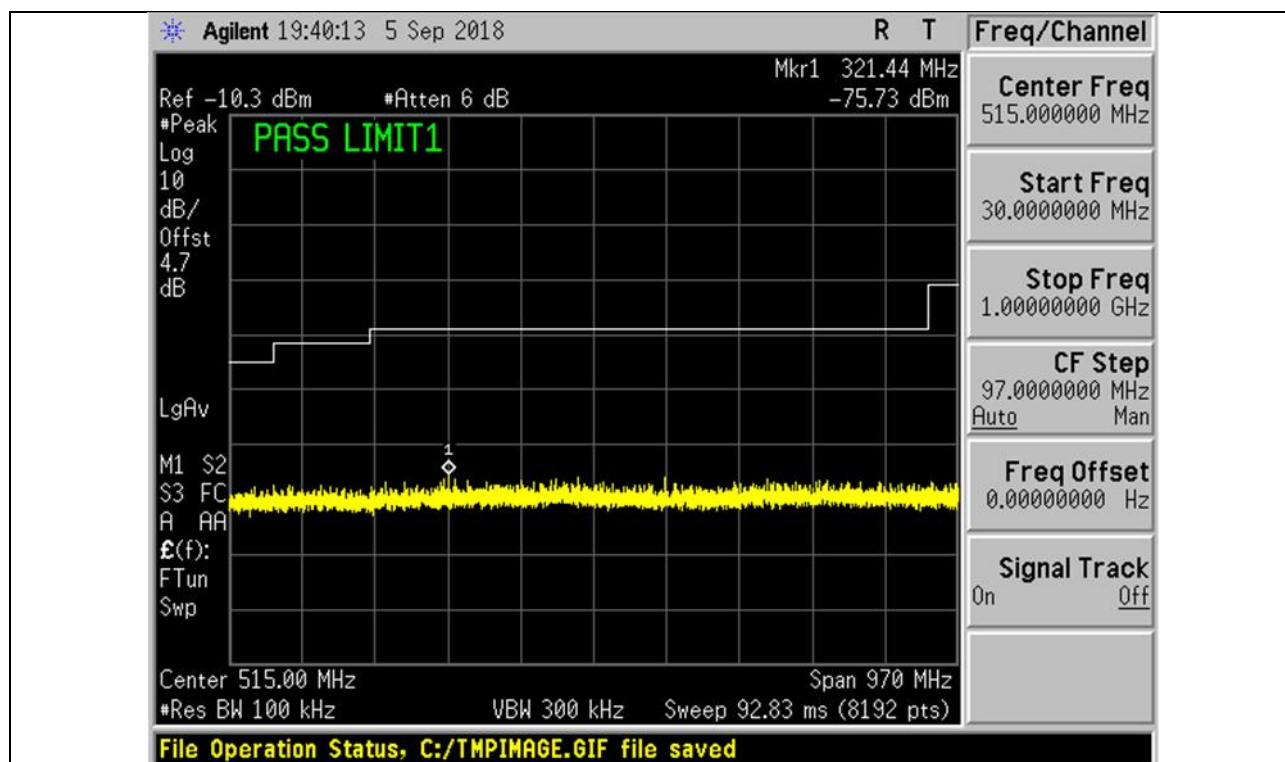


Plot 24 - Upper Channel

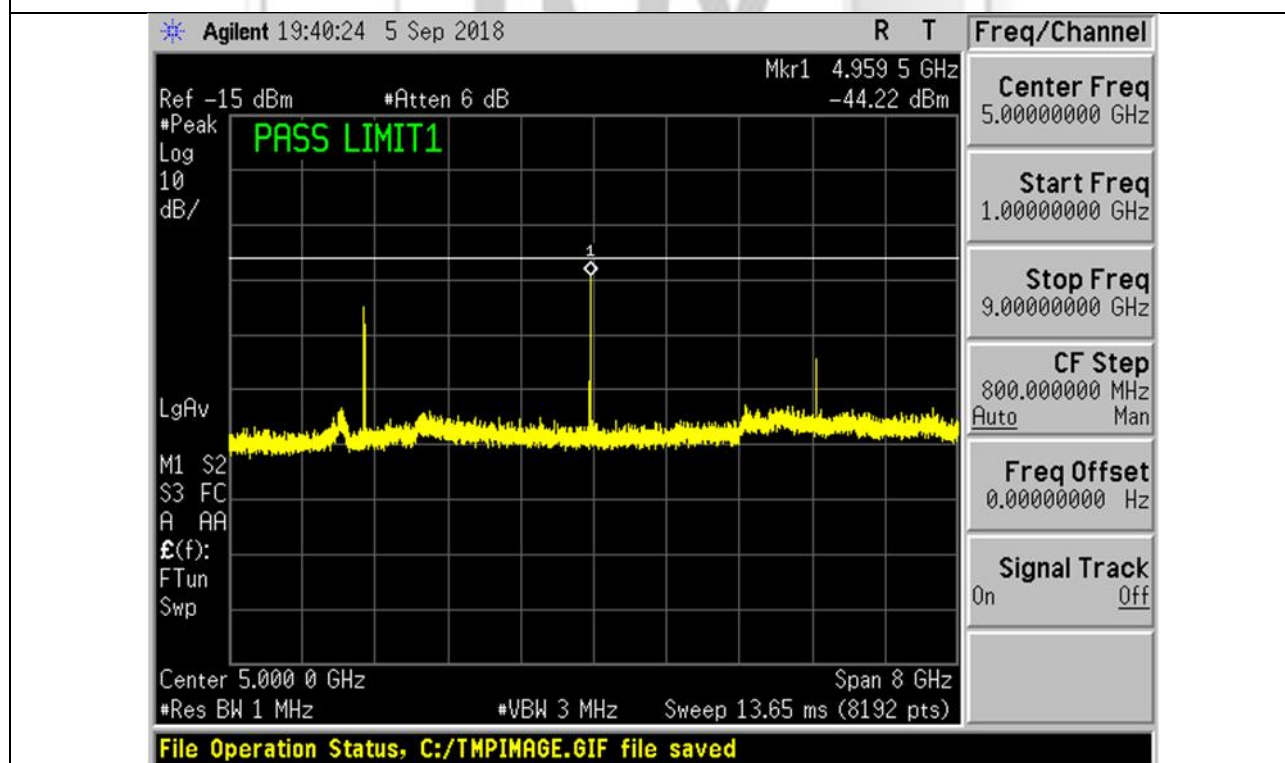


Plot 25 - Upper Channel

RF Conducted Spurious Emissions (Restricted Bands) Plots

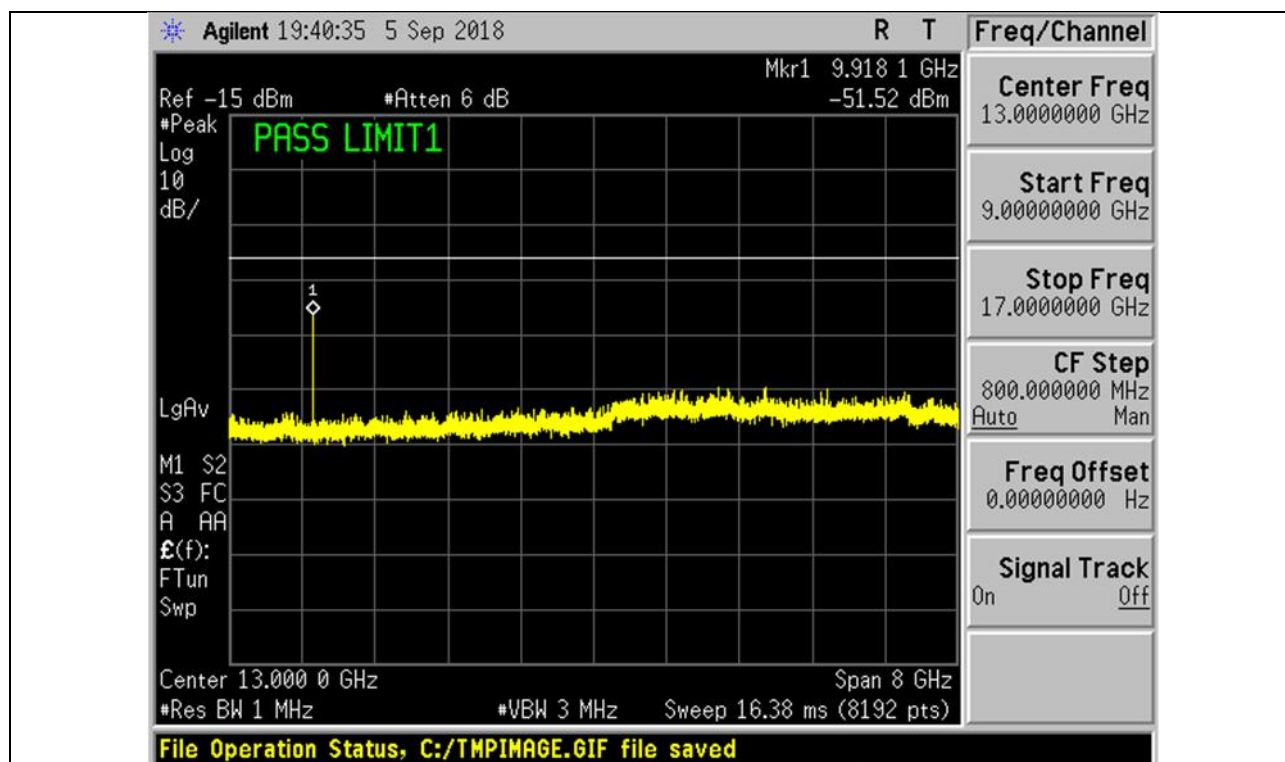

Plot 26 – Upper Channel

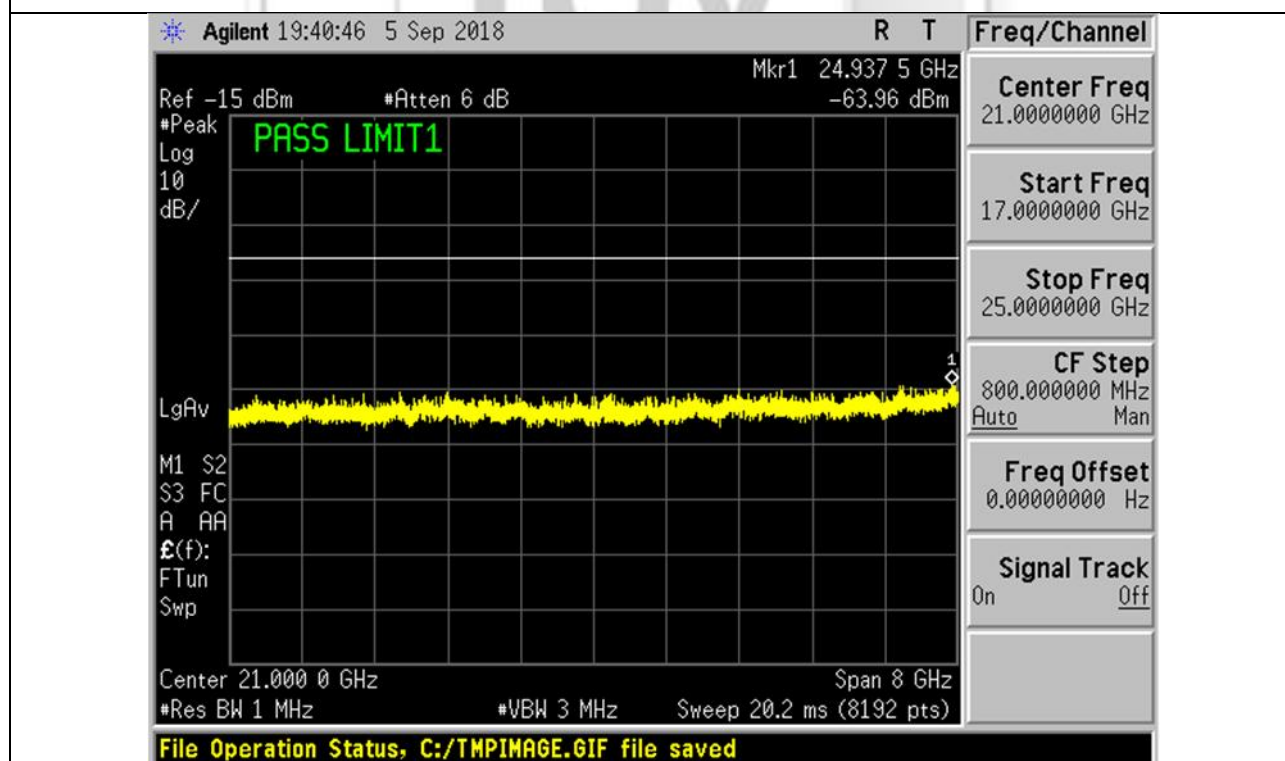

Plot 27 – Upper Channel

2.7 Band Edge Compliance (Conducted)

2.7.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

2.7.2 Test Setup

- 2.7.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.7.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.7.2.3 The RF antenna connector was connected to the spectrum analyser via a low-loss coaxial cable.
- 2.7.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz.
- 2.7.2.5 All other supporting equipment were powered separately from another filtered mains.

2.7.3 Test Method

- 2.7.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.
- 2.7.3.2 The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge (within 2MHz of the band edge).
- 2.7.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.
- 2.7.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.7.3.5 The measurements were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.


2.7.4 Test Results

Test Input Power	5Vdc	Temperature	23°C
Attached Plots	28 – 29	Relative Humidity	57%
Antenna	0	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	05 Sep 2018


No significant signal was found and they were below the specified limit.



Band Edge Compliance (Conducted) Plots

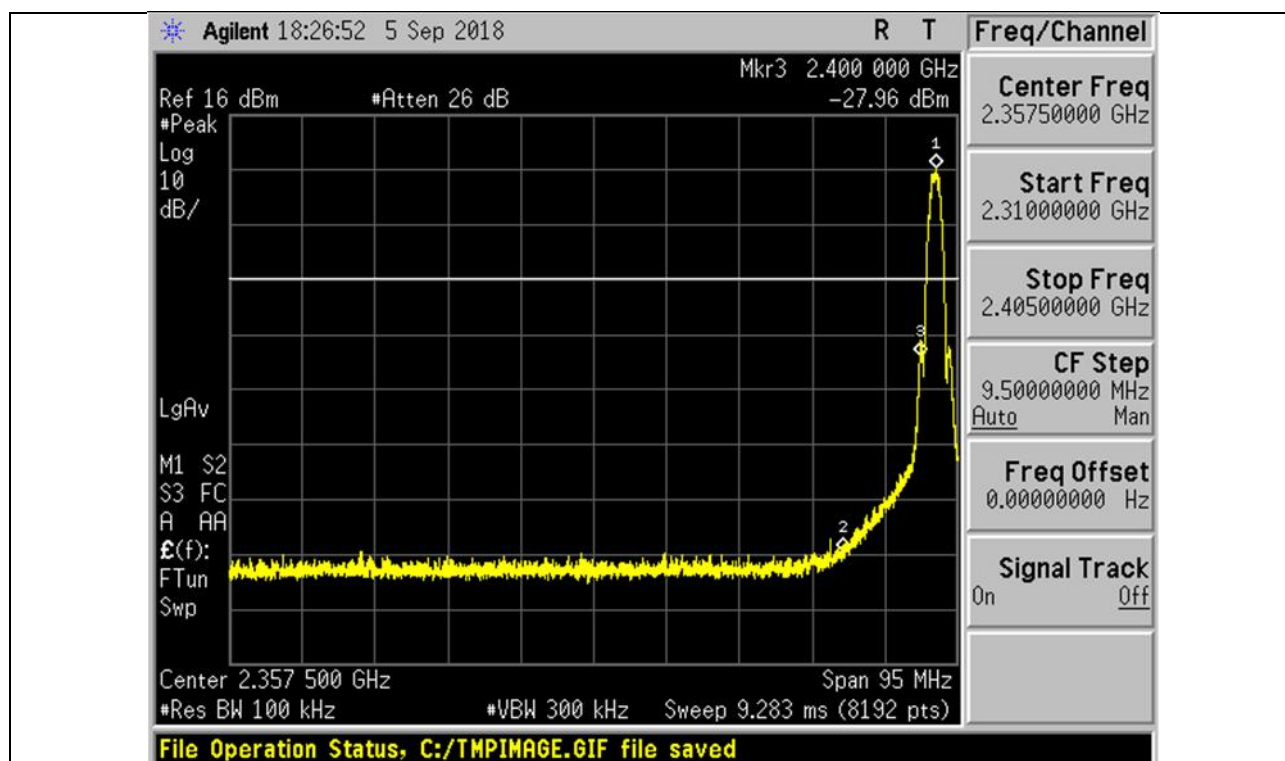

Plot 28 – Lower Band Edge at 2.4000GHz

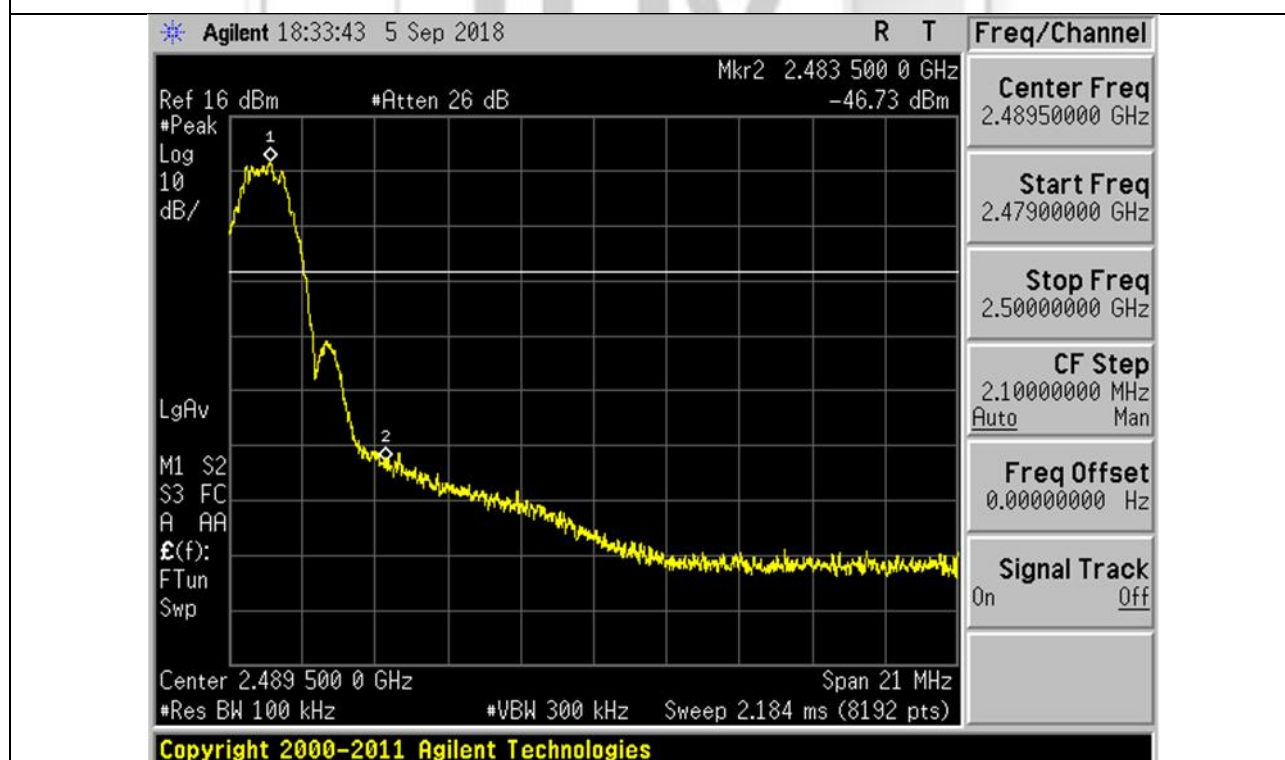

Plot 29 – Upper Band Edge at 2.4835GHz

2.8 Band Edge Compliance (Radiated)

2.8.1 Test Limits

The EUT shows compliance to the requirements of this section, which states in any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator (EUT) is operating, the radio frequency power that is produced by the EUT shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands shall comply to the radiated emission limits specified in 15.209.

2.8.2 Test Setup

2.8.2.1 The EUT and supporting equipment were set up as shown in the setup photo.

2.8.2.2 The power supply for the EUT was connected to a filtered mains.

2.8.2.3 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were respectively set to 100kHz and 300kHz to show compliance of spurious at band edges are at least 20dB below the carriers. For restricted band spurious at band edges, peak and average measurement plots were taken using the following setting:

- a. Peak Plot:
RBW = 1MHz, VBW = 3RBW
- b. Average Plot
RBW = 1MHz, VBW = 10Hz

2.8.2.4 All other supporting equipment were powered separately from another filtered mains.

2.8.3 Test Method

2.8.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode.

2.8.3.2 The frequency span of the spectrum analyser was set to wide enough to capture the lower band edge of the transmission band, 2.400GHz and any spurious emissions at the band edge.

2.8.3.3 The spectrum analyser was set to max hold to capture any spurious emissions within the span. The signal capturing was continuous until no further spurious emissions were detected.

2.8.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.

2.8.3.5 The measurements were repeated with the frequency span of the spectrum analyser was set to wide enough to capture the upper band edge frequency of the transmission band, 2.4835GHz and the any spurious emissions at the band-edge.




2.8.4 Test Results

Test Input Power	5Vdc	Temperature	22°C
Attached Plots	30 – 35	Relative Humidity	57%
		Atmospheric Pressure	1029mbar
		Tested By	Dylan Lin
		Test Date	17 Sep 2018


No significant signal was found and they were below the specified limit.




Band Edge Compliance (Radiated) Plots (20dB Delta from Carrier at Band Edge)

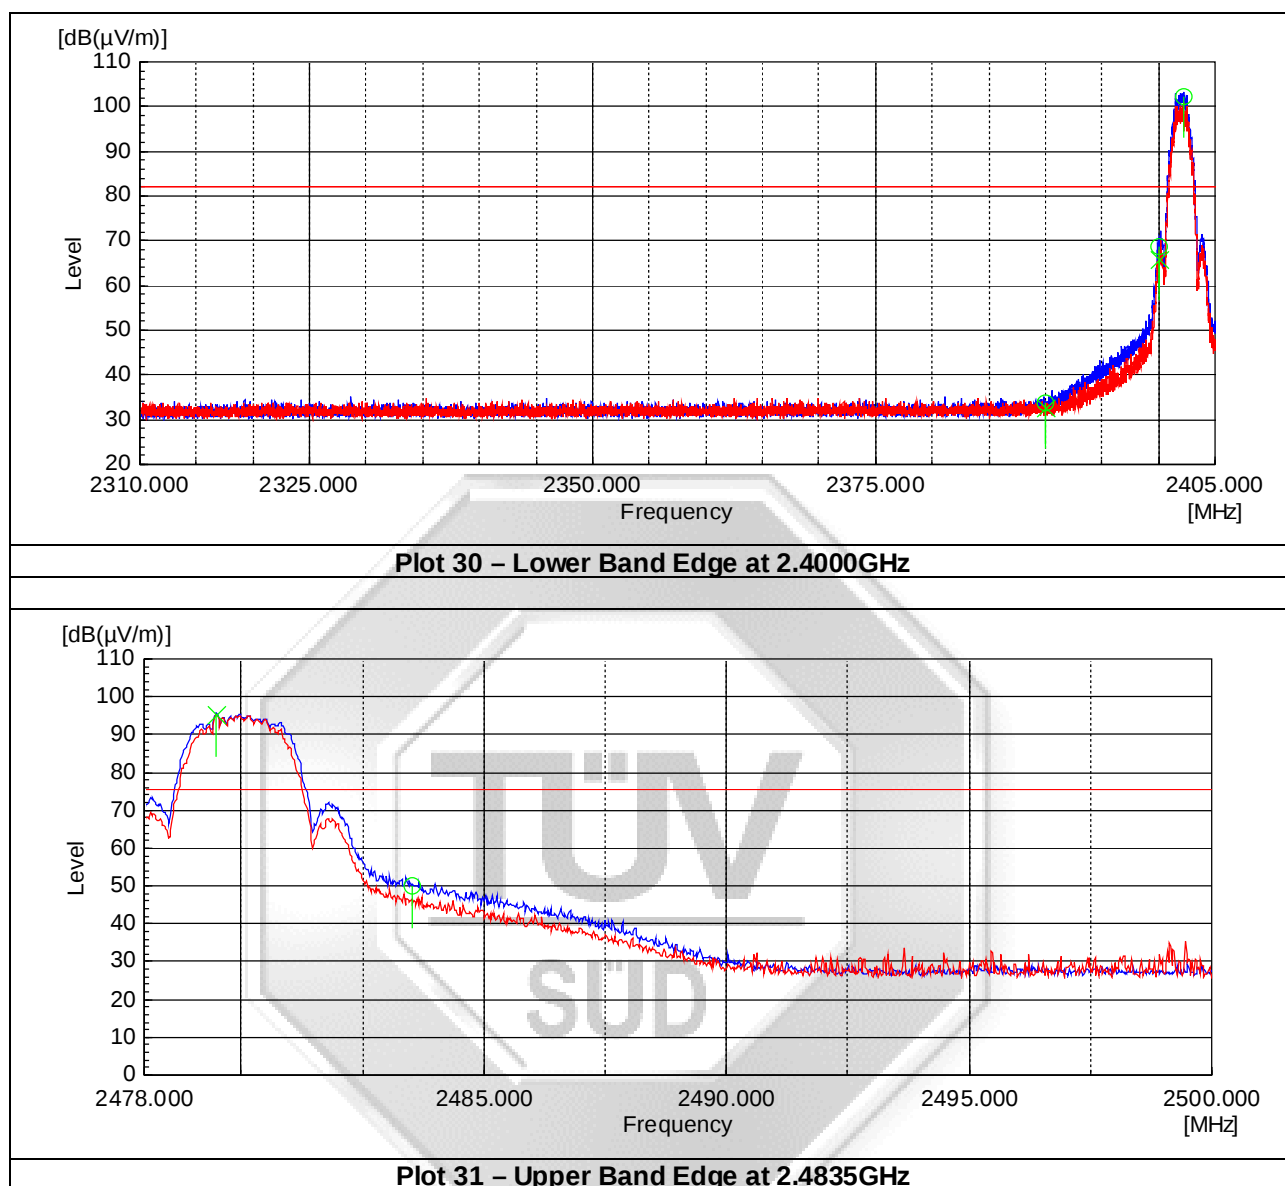

Band Edge Compliance (Radiated) Plots (Restricted Band)

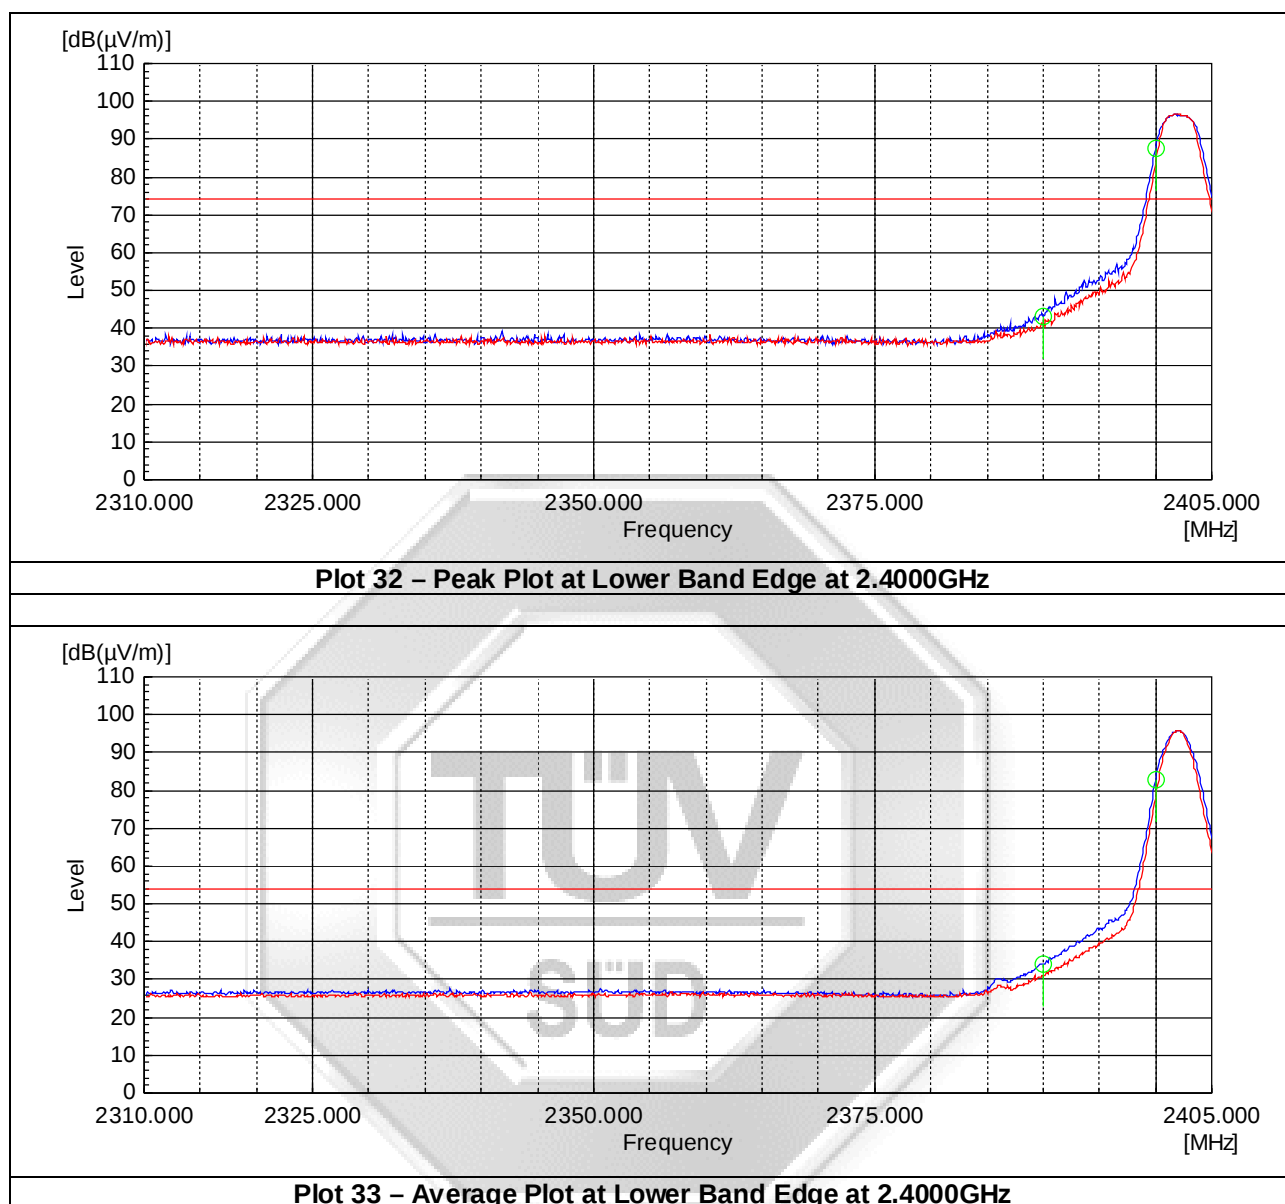

Band Edge Compliance (Radiated) Plots (Restricted Band)

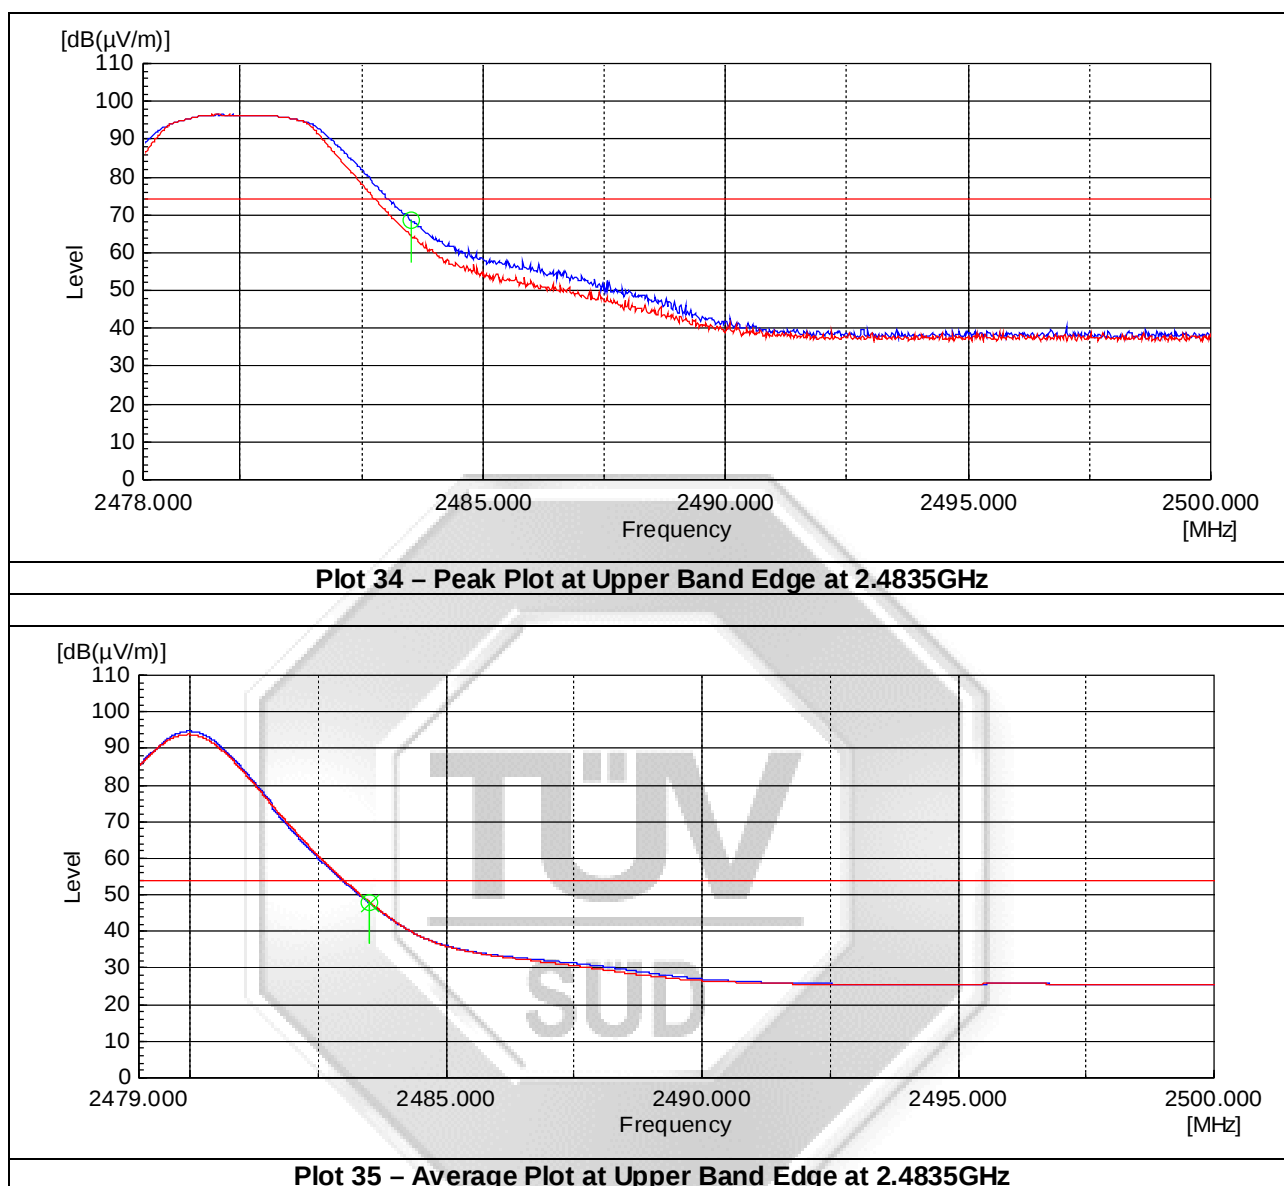

2.9 Peak Power Spectral Density

2.9.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the peak power spectral density conducted from the intentional radiator (EUT) to the antenna shall not be greater than 8dBm (6.3mW) in any 3kHz band during any time interval of continuous transmission.

2.9.2 Test Setup

- 2.9.2.1 The EUT and supporting equipment were set up as shown in the setup photo.
- 2.9.2.2 The power supply for the EUT was connected to a filtered mains.
- 2.9.2.3 The RF antenna connector was connected to the spectrum via a low-loss coaxial cable.
- 2.9.2.4 The resolution bandwidth (RBW) and the video bandwidth (VBW) of the spectrum analyser were set to the following:
RBW = 3kHz
VBW = 3RBW
Span = 1.5 times the channel bandwidth (6dB Bandwidth)
Sweep time = auto couple
- 2.9.2.5 All other supporting equipment were powered separately from another filtered mains.

2.9.3 Test Method

- 2.9.3.1 The EUT was switched on and allowed to warm up to its normal operating condition. The EUT was then configured to operate in the test mode at lower channel.
- 2.9.3.2 The peak of the transmitting frequency was detected with the marker peak function of the spectrum analyser.
- 2.9.3.3 The peak power density of the transmitting frequency was plotted and recorded.
- 2.9.3.4 The measurements were repeated if the EUT supports more than one modulation and data rate.
- 2.9.3.5 The measurement was repeated with the transmitting frequency was set to middle channel and upper channel respectively.

2.9.4 Test Results


Test Input Power	5Vdc	Temperature	23°C
Attached Plots	36 – 38	Relative Humidity	57%
Antenna	0	Atmospheric Pressure	1030mbar
		Tested By	Chang Wai Kit
		Test Date	05 Sep 2018

Channel	Channel Frequency (GHz)	Peak Power Spectral Density (mW) *See Note 1	Limit (mW)
Lower	2.402	0.176	6.3
Middle	2.440	0.268	6.3
Upper	2.480	0.240	6.3


Notes

1.	Only the highest measured peak power spectral density was reported. Refer to plots for all measured peak power spectral density.
----	--

Peak Power Spectral Density Plots

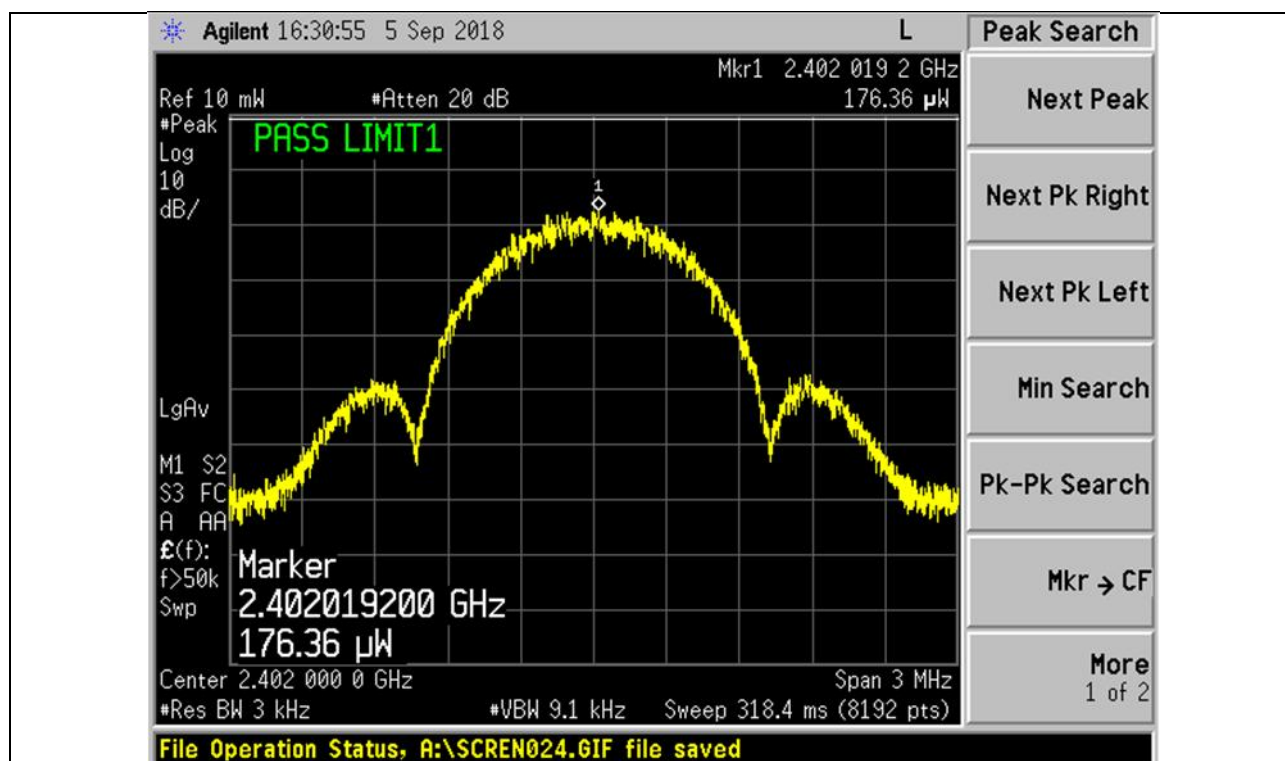


Plot 36 – Lower Channel

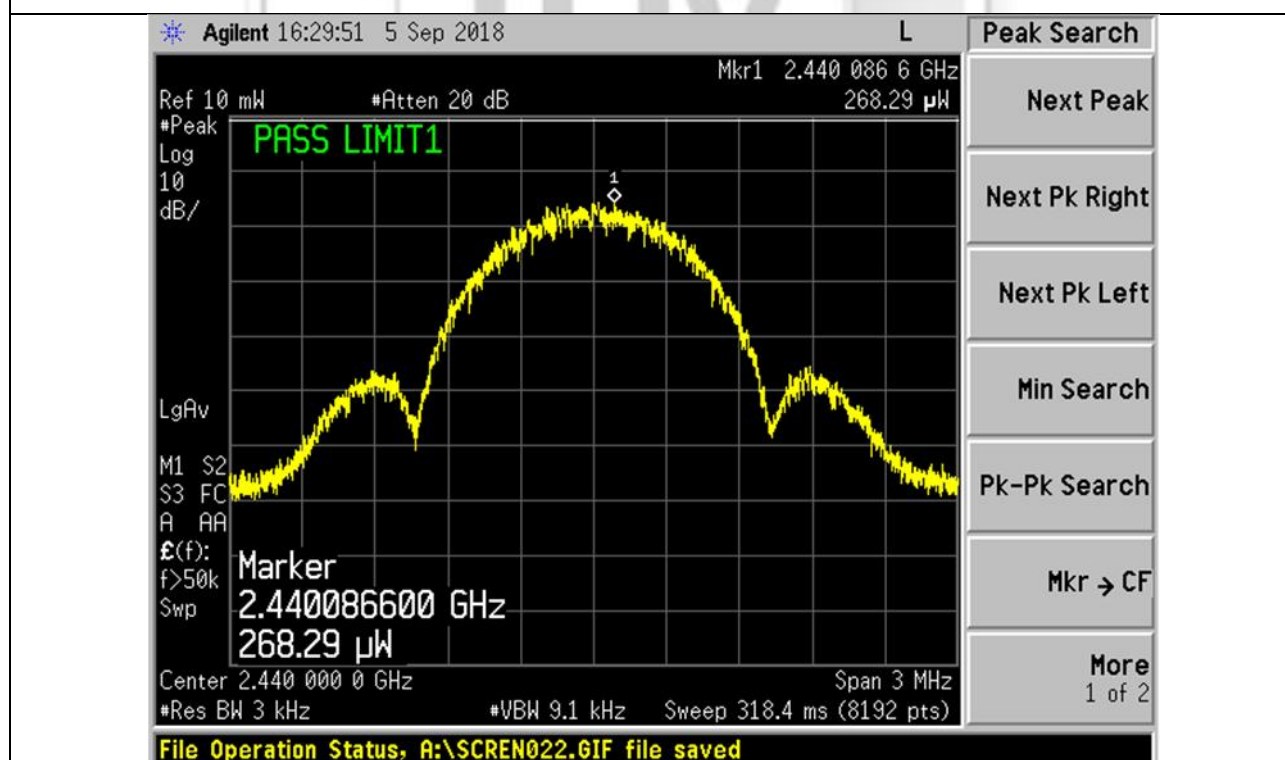

Plot 37 – Middle Channel

Peak Power Spectral Density Plots

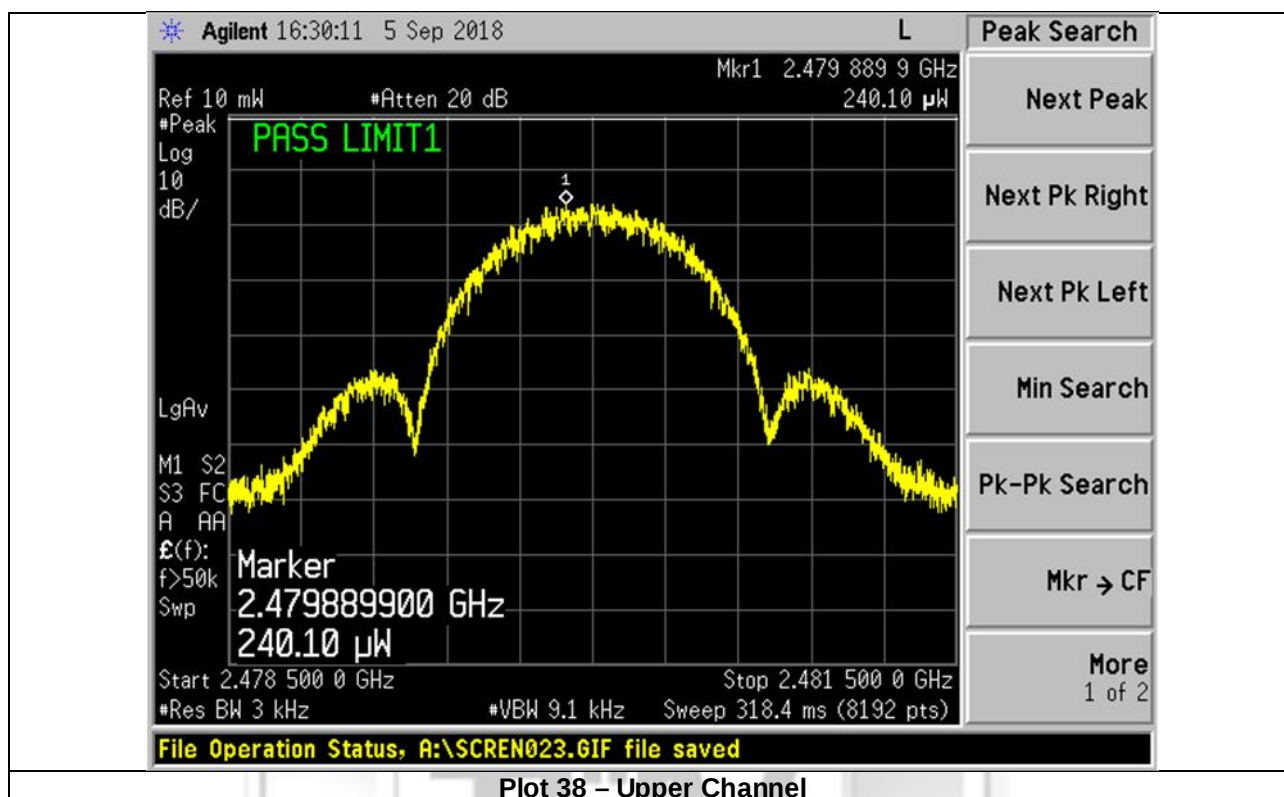

2.10 Maximum Permissible Exposure (MPE)

2.10.1 Test Limits

The EUT shows compliance to the requirements of this section, which states the MPE limits for general population / uncontrolled exposure are as shown below:

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (min)
0.3 - 1.34	614	1.63	100 ^{Note 2}	30
1.34 - 30	824 / f	2.19 / f	180 / f ² ^{Note 2}	30
30 - 300	27.5	0.073	0.2	30
300 - 1500	-	-	f / 1500	30
1500 - 100000	-	-	1.0	30
Notes				
1. f = frequency in MHz				
2. Plane wave equivalent power density				

Maximum Permissible Exposure Computation

The power density at 20cm distance was computed from the following formula:

$$\begin{aligned}
 S &= (30GP) / (377d^2) \\
 \text{where } S &= \text{Power density in W/m}^2 \\
 P &= 0.0060W \text{ (maximum peak measured from Maximum Peak Power)} \\
 d &= \text{Test distance at 0.2m} \\
 G &= \text{Numerical isotropic gain, 2.19 (3.4dBi)}
 \end{aligned}$$

Substituting the relevant parameters into the formula:

$$\begin{aligned}
 S &= [(30GP) / 377d^2] \\
 &= 0.0261 \text{ W/m}^2 \\
 &= 0.0026 \text{ mW/cm}^2
 \end{aligned}$$

∴ The power density of the EUT at 20cm distance is 0.0026mW/cm² based on the above computation and found to be lower than the power density limit of 1.0mW/cm².

3 Photographs

TEST SETUP



Conducted Emissions Test Setup (Front View)




Conducted Emissions Test Setup (Rear View)

TEST SETUP (30MHz to 1GHz)




**Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup
(Front View)**

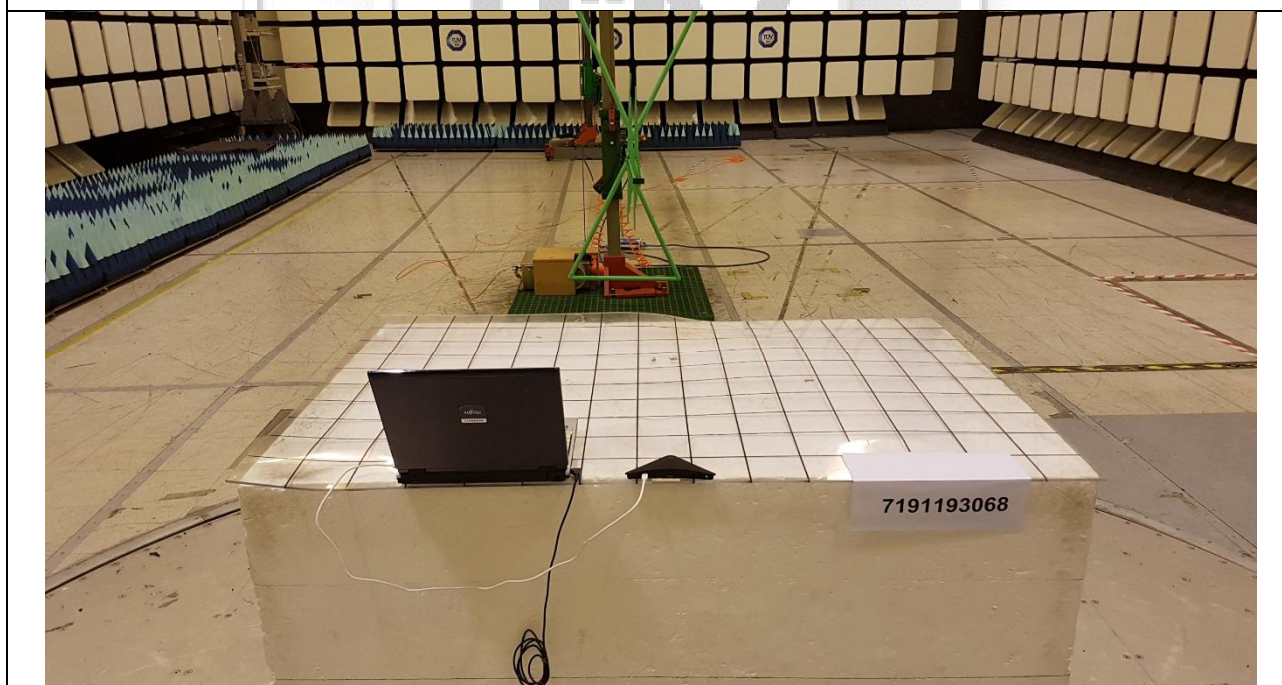


**Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup
(Rear View)**

TEST SETUP (Above 1GHz)

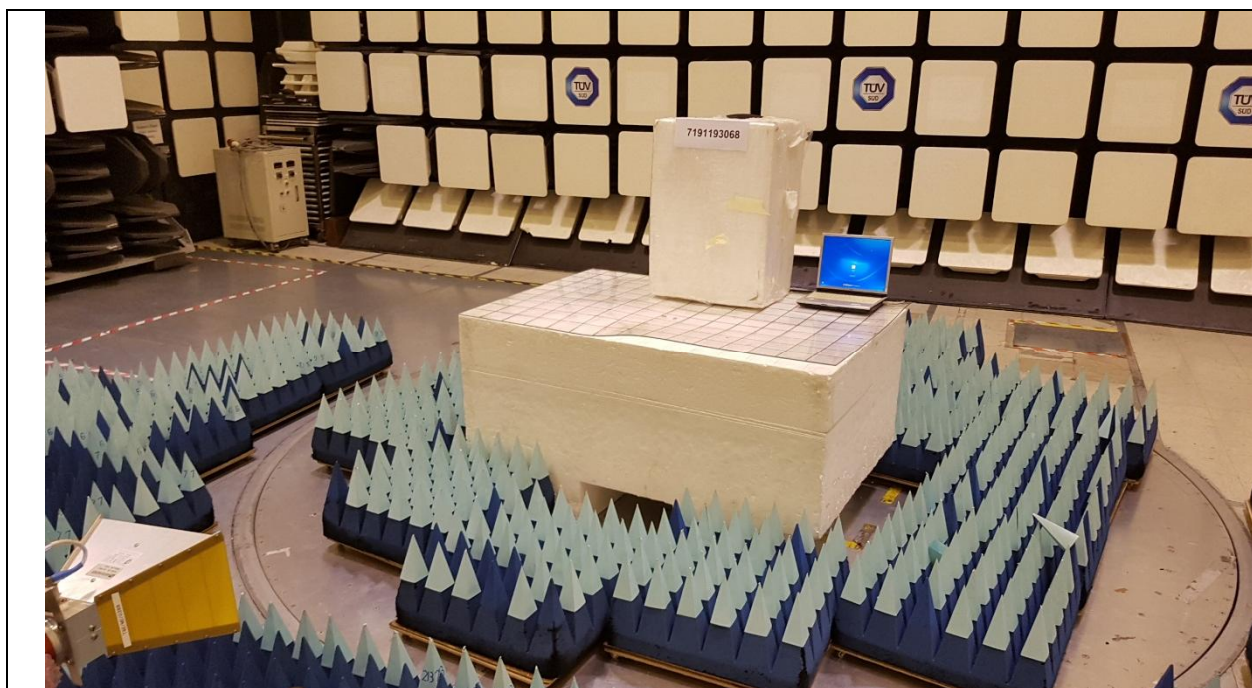

Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Front View)

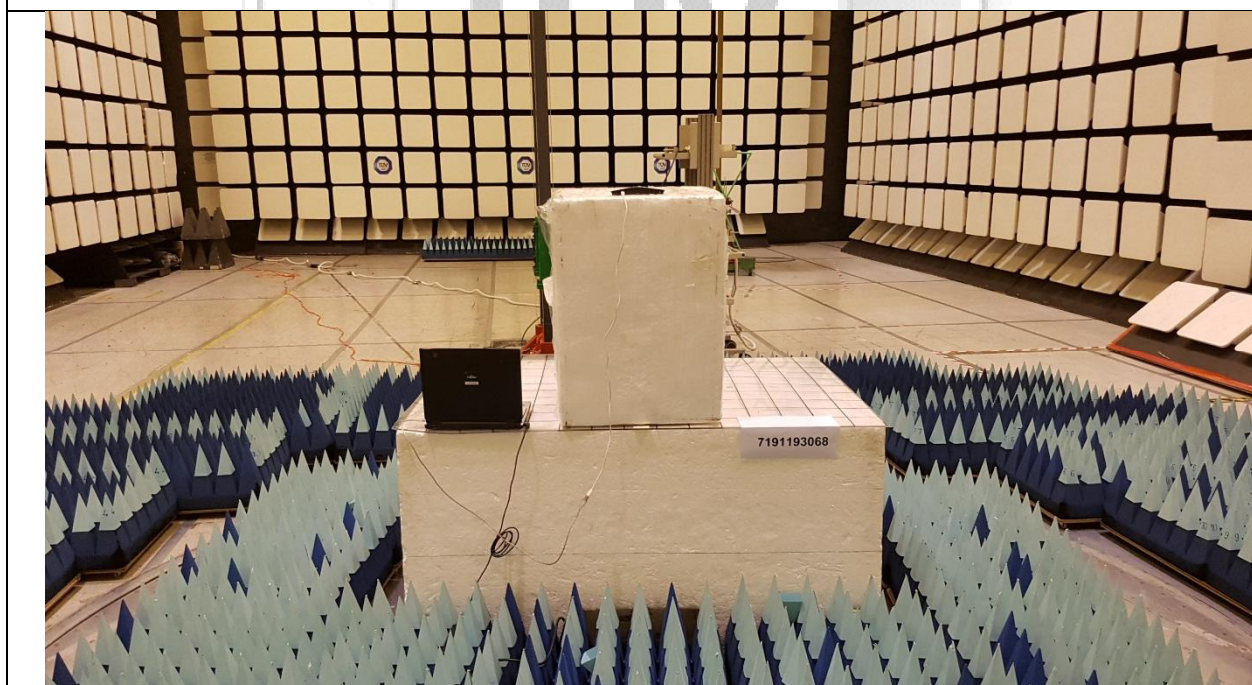


Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement) Test Setup (Rear View)

TEST SETUP



Spectrum Bandwidth (6db Bandwidth Measurement) Test Setup

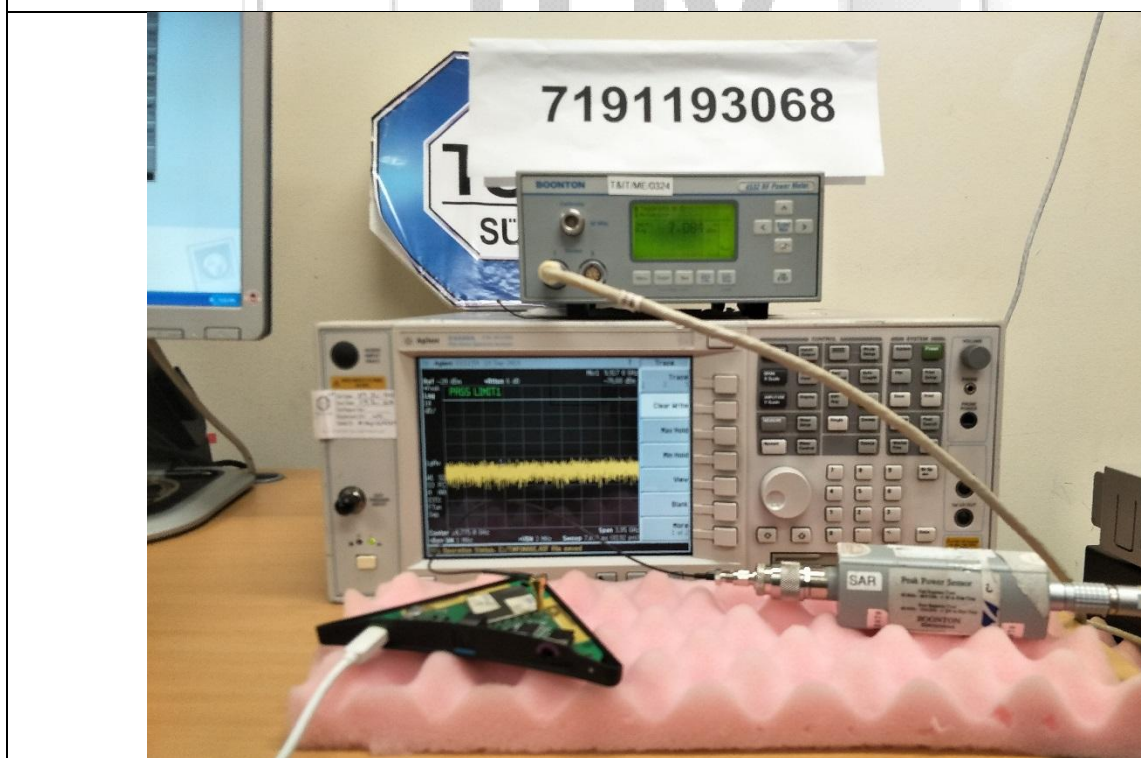


Maximum Peak Power Test Setup

TEST SETUP



RF Conducted Spurious Emissions (Non-Restricted Bands) Test Setup

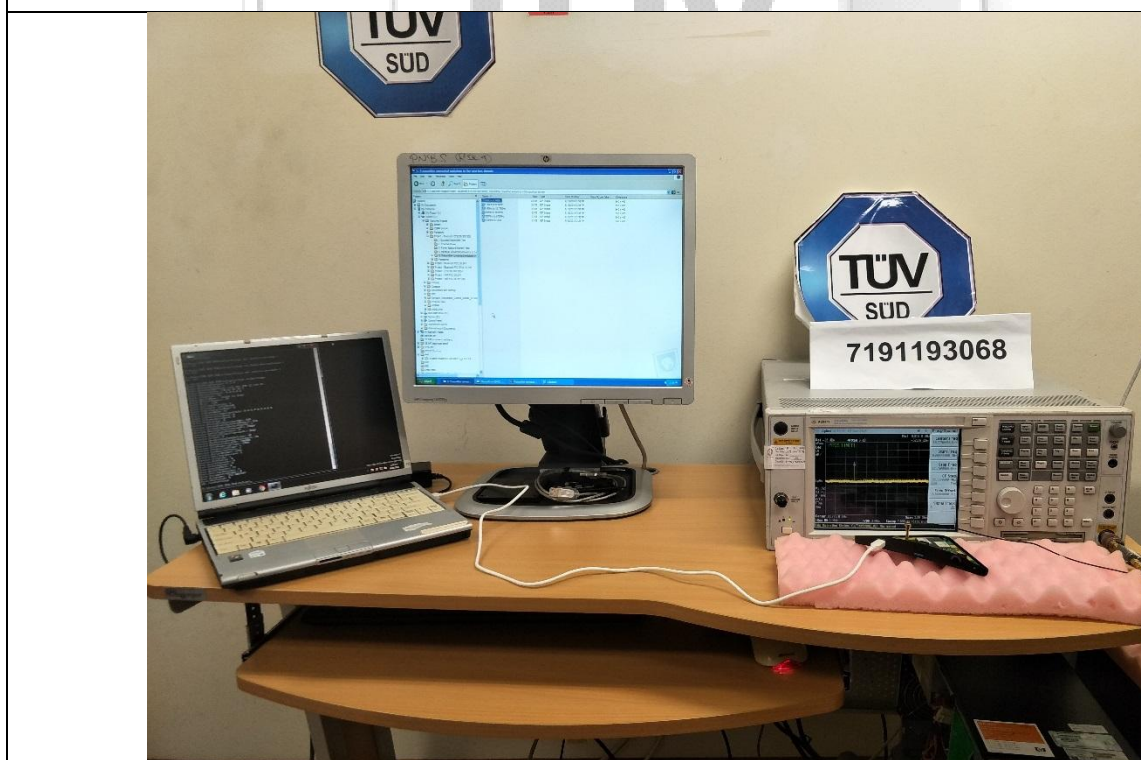


RF Conducted Spurious Emissions (Restricted Bands) Test Setup

TEST SETUP




Band Edge Compliance (Conducted) Test Setup

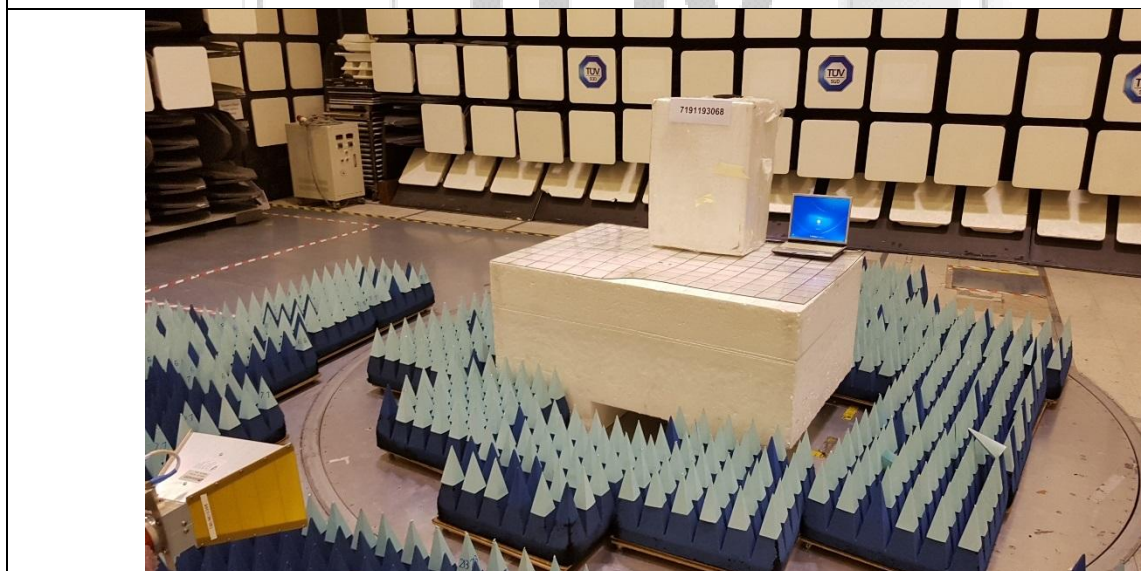


Band Edge Compliance (Radiated) Test Setup

TEST SETUP

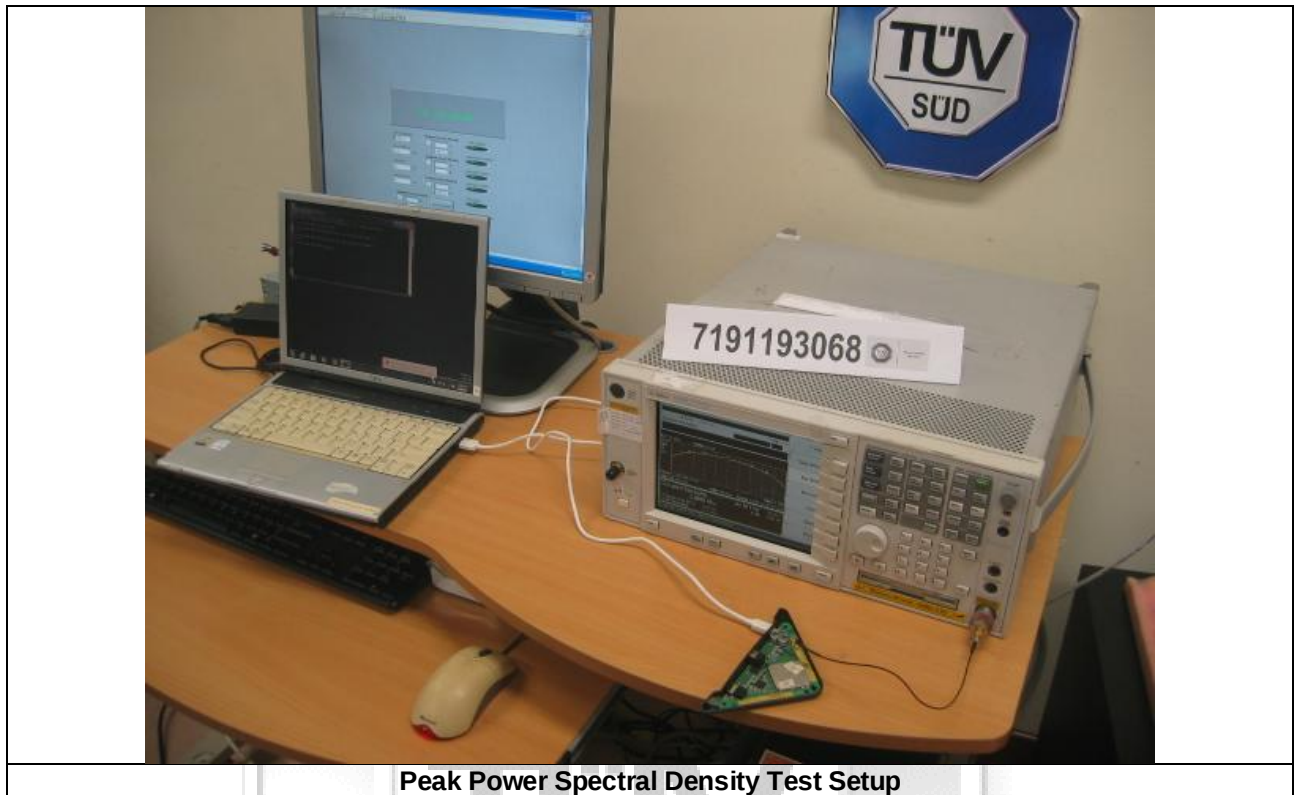

EUT PHOTOGRAPHS

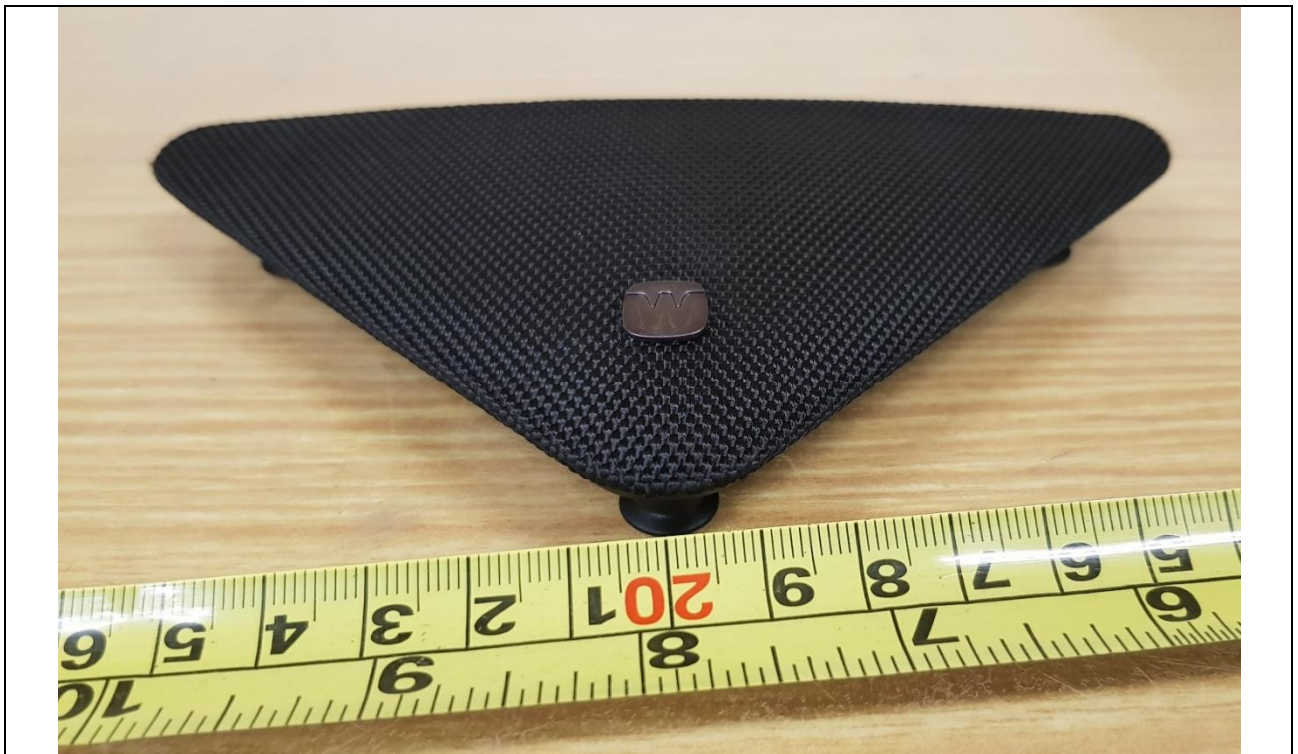

View 1




View 2



PCB PHOTOGRAPHS




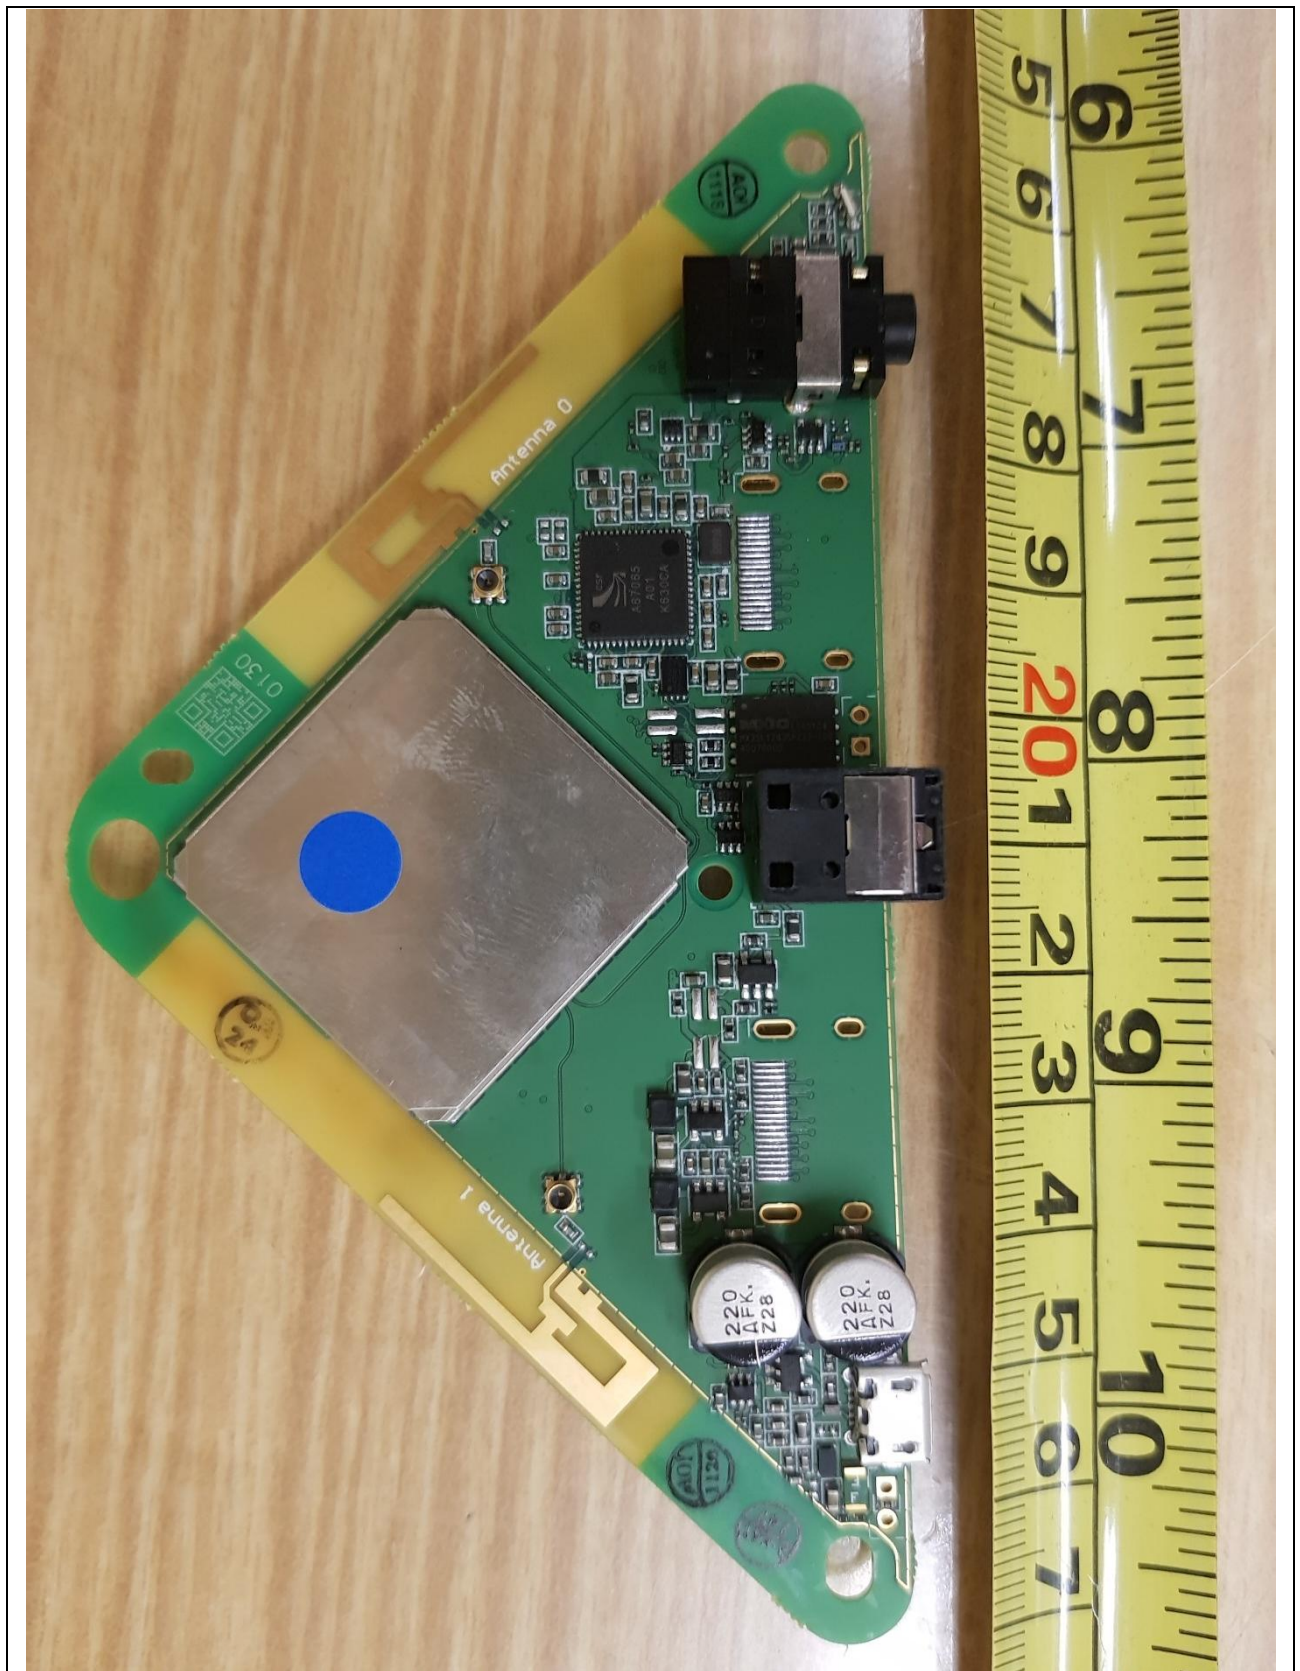


View 2



View 3

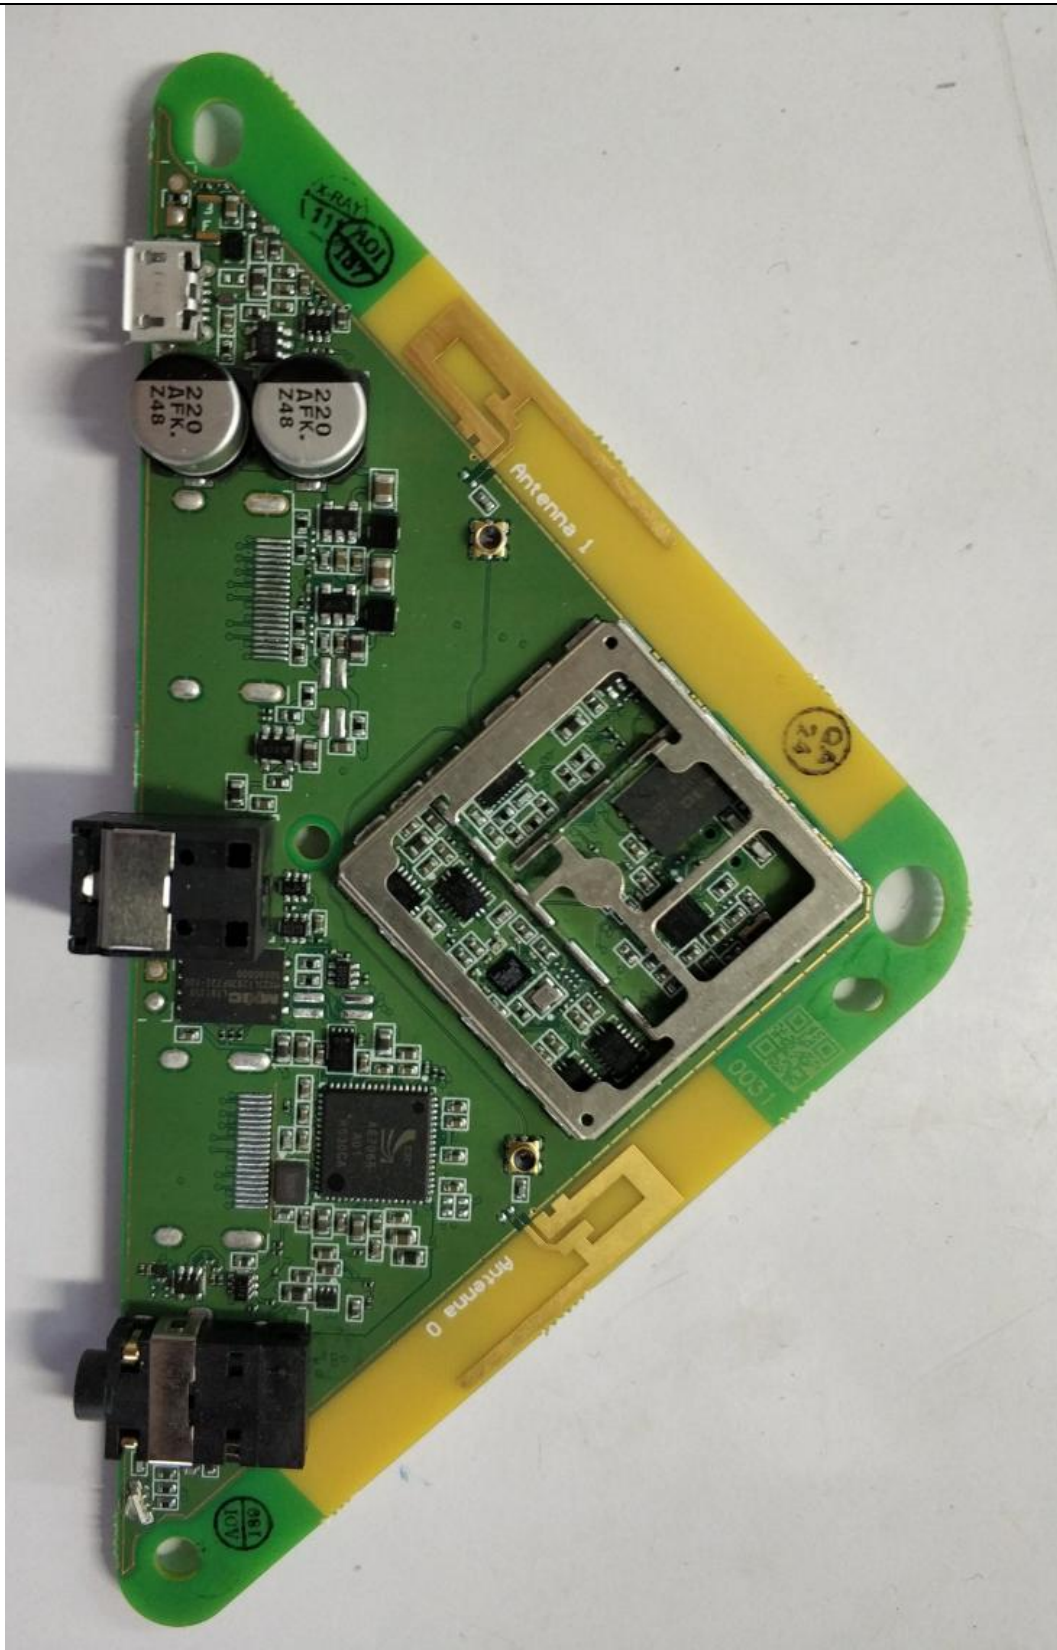

RF Module Circuit with RF Shield Removed

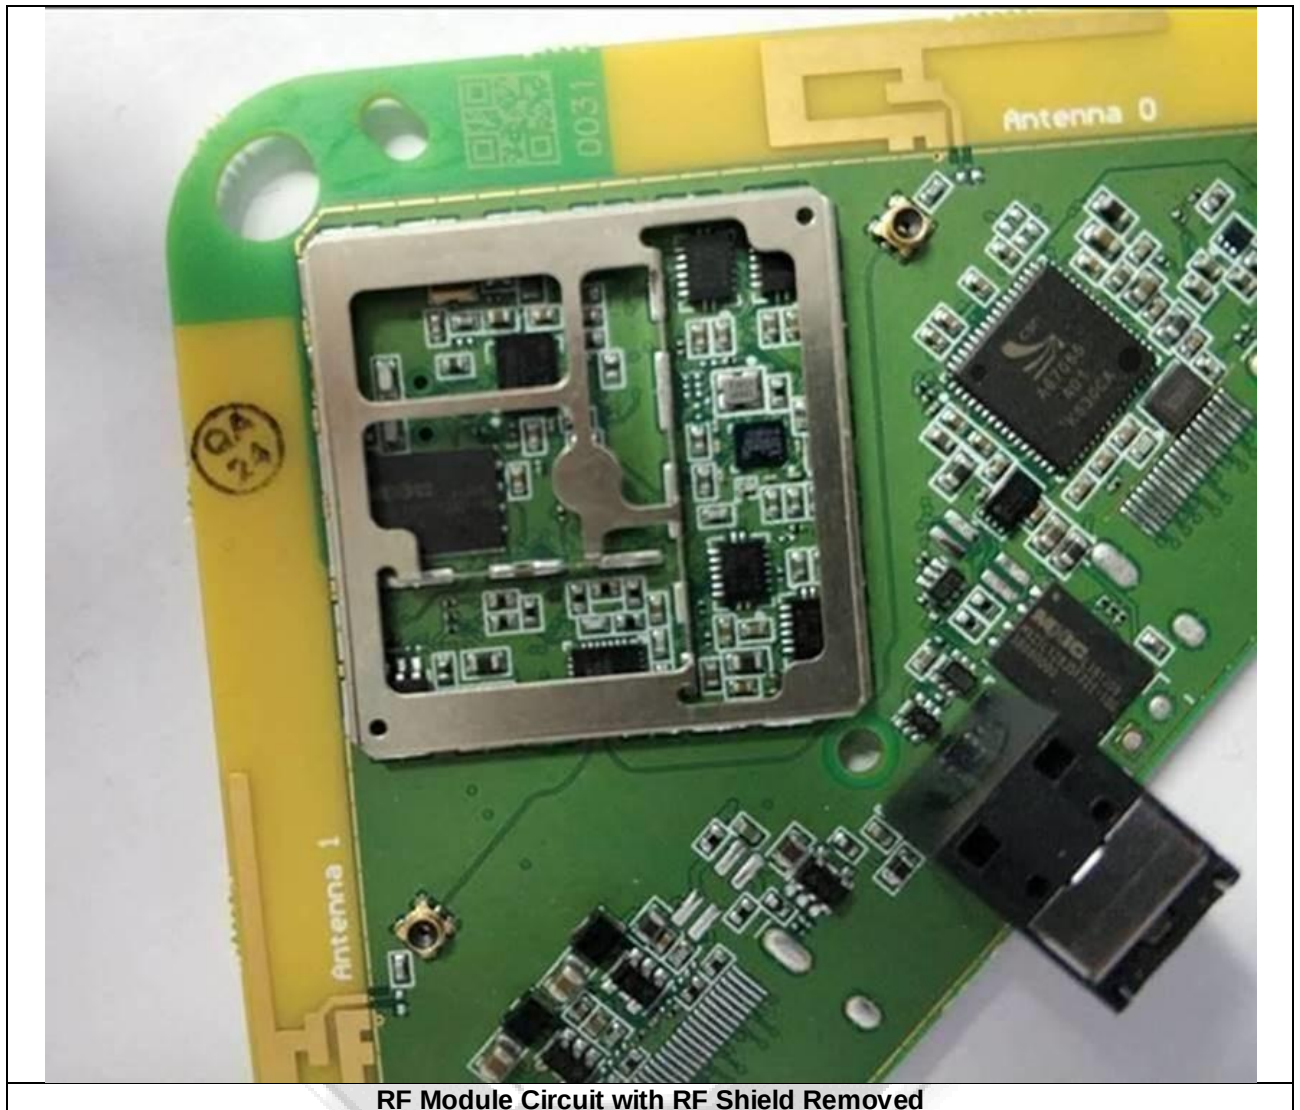

RF Module Circuit with RF Shield Removed

4 Test Equipment

Instrument	Model	S/No	Cal Due Date
<i>Conducted Emissions</i>			
Rohde & Schwarz EMI Test Receiver (9kHz - 3GHz)	ESCI	100477	13 May 2019
Schaffner LISN 2-Line V-Network	NNB41	04/10151	01 Feb 2019
<i>Radiated Emissions (Spurious Emissions Inclusive Restricted Bands Requirement)</i>			
ESU 40 EMI Test Receiver	ESU 40	1302.6005k40-100355-wq	29 Mar 2019
EMCO Loop Antenna	6502	134413	28 Oct 2018
Schaffner Bilog Antenna -(30MHz-2GHz)	CBL6112B	2597	20 Feb 2019
Com-Power Preamplifier (1MHz-1GHz)	PAM-103	441058	22 Mar 2019
TDK-RF Horn Antenna	HRN-0118	130256	22 Feb 2019
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	09 Mar 2019
ETS Horn Antenna(18GHz-40GHz)(Ref)	3116	0004-2474	15 Nov 2018
Agilent Preamplifier(1GHz-26.5GHz) (PA18)	8449D	3008A02305	28 Sep 2019
Toyo Preamplifier (26.5GHz-40GHz)	HAP26-40W	00000005	15 Nov 2018
Micro-tronics Bandstop Filter (2.4GHz)	BRM50701-02	007	13 Feb 2019
<i>Spectrum Bandwidth (6dB Bandwidth Measurement)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
<i>Maximum Peak Power</i>			
Boonton RF Power Meter	4532	97701.1417	27 Feb 2019
Boonton Peak Power Sensor	56218-S/1	1417	27 Feb 2019
<i>RF Conducted Spurious Emissions (Non-Restricted Bands)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
<i>RF Conducted Spurious Emissions (Restricted Bands)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
Micro-tronics Bandstop Filter (2.4GHz)	BRM50701-02	007	13 Feb 2019
<i>Band Edge Compliance (Conducted)</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019
<i>Band Edge Compliance (Radiated)</i>			
ESU 40 EMI Test Receiver	ESU 40	1302.6005k40-100355-wq	29 Mar 2019
TDK-RF Horn Antenna	HRN-0118	130256	22 Feb 2019
R&S Preamplifier (1GHz -18GHz)	SCU18	102191	09 Mar 2019
<i>Peak Power Spectral Density</i>			
Agilent Spectrum Analyzer	E4440A	MY45304764	09 Jan 2019

5 Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95%, with a coverage factor of 2.


Test Name	Measurement Uncertainty
Conducted Emissions	9kHz to 30MHz, $\pm 2.1\text{dB}$
Radiated Emissions	30MHz to 1GHz, $\pm 3.8\text{dB}$ >1GHz to 40GHz, $\pm 4.5\text{dB}$
Maximum Permissible Exposure	0.1MHz – 3GHz is $\pm 15.0\%$



6 Annex A – FCC Label and Position

Labelling requirements per Section 2.925 & 15.19

The label shown will be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

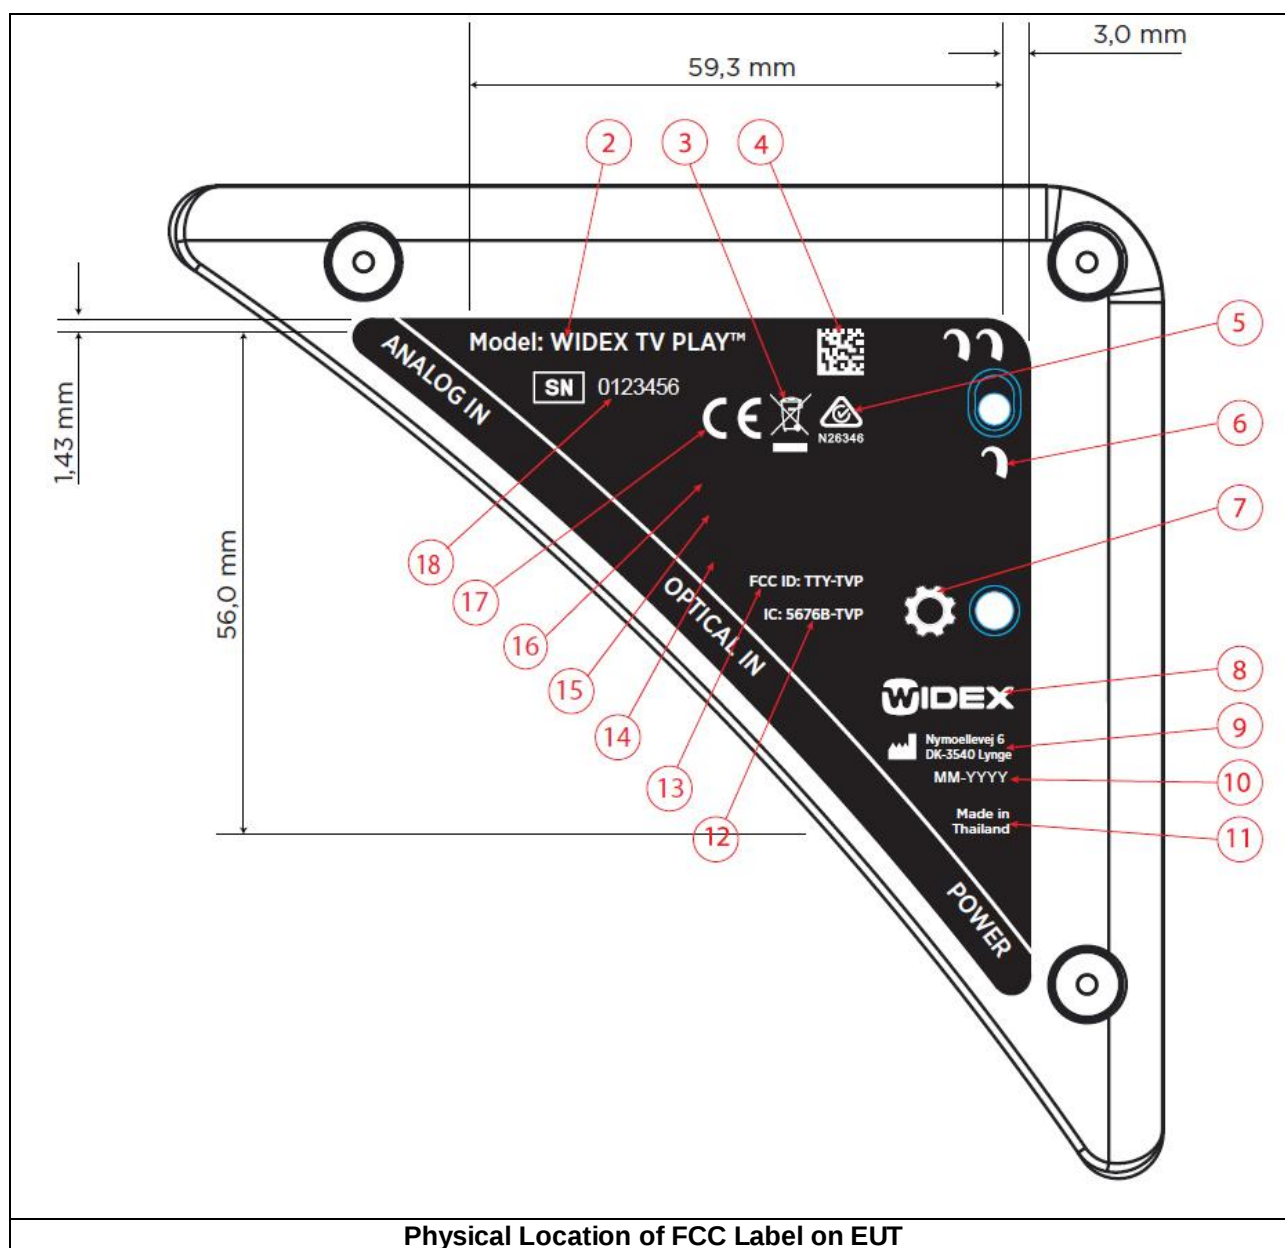

Please note that this Report is issued under the following terms :

1. This report applies to the sample of the specific product/equipment given at the time of its testing/calibration. The results are not used to indicate or imply that they are applicable to other similar items. In addition, such results must not be used to indicate or imply that TÜV SÜD PSB approves, recommends or endorses the manufacturer, supplier or user of such product/equipment, or that TÜV SÜD PSB in any way "guarantees" the later performance of the product/equipment. Unless otherwise stated in this report, no tests were conducted to determine long term effects of using the specific product/equipment.
2. The sample/s mentioned in this report is/are submitted/supplied/manufactured by the Client. TÜV SÜD PSB therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.
3. Nothing in this report shall be interpreted to mean that TÜV SÜD PSB has verified or ascertained any endorsement or marks from any other testing authority or bodies that may be found on that sample.
4. This report shall not be reproduced wholly or in parts and no reference shall be made by the Client to TÜV SÜD PSB or to the report or results furnished by TÜV SÜD PSB in any advertisements or sales promotion.
5. Unless otherwise stated, the tests were carried out in TÜV SÜD PSB Pte Ltd, No.1 Science Park Drive Singapore 118221.

July 2011

