

Radio Test Report

for

Widex A/S

on

UNIQUE-Passion (U-PA)

Document No: TRA-022249-02-47-03B

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com

Radio Test Report : TRA-022249-02-47-03B

Applicant : Widex A/S

Apparatus : UNIQUE-Passion (U-PA)

Specification(s) : CFR47 Part 15 (c) & RSS-210

Purpose of Test : Certification

FCCID : TTY-UPA

IC ID : 5676-UPA

Authorised by :

: Radio Product Manager

Issue Date : 11th August 2015

Authorised Copy Number : PDF

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com

Contents

Section 1:	Introduction	4
	1.1 General	4
	1.2 Tests Requested By	5
	1.3 Manufacturer	5
	1.4 Apparatus Assessed	5
	1.5 Test Result Summary	6
	1.6 Notes Relating To the Assessment	7
	1.7 Deviations from Test Standards	7
Section 2:	Measurement Uncertainty	8
	2.1 Measurement Uncertainty Values	8
Section 3:	Modifications	10
	3.1 Modifications Performed During Assessment	10
Appendix A:	Formal Emission Test Results	11
	A1 Transmitter Intentional Emission Radiated	12
	A2 Radiated Electric Field Emissions	13
	A3 Unintentional Radiated Emissions	15
Appendix B:	Supporting Graphical Data	17
Appendix C:	Additional Test and Sample Details	21
Appendix D:	Additional Information	27
Appendix E:	Calculation of the duty cycle correction factor	28
Appendix F:	Photographs and Figures	29
Appendix G:	MPE Calculation	31
Appendix H:	Cross Reference FCC Part 15c to IC RSS 210	33

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus based upon tests carried out on samples submitted to the Laboratory.

Test performed at: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: A Tosif

Author(s): A Tosif

This report must not be reproduced except in full without prior written permission from TRaC Global Ltd

1.2 Tests Requested By

This testing in this report was requested by:

Widex A/S
Nymoellevej 6
3540 Lynge
Denmark

1.3 Manufacturer

As Above

1.4 Apparatus Assessed

The following apparatus was assessed between: 09/07/14 and 18/07/14

UNIQUE-Passion (U-PA)

The above equipment was a hearing aid containing radio circuitry operating at 10.6 MHz

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Spurious Emissions Radiated <1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
Spurious Emissions Radiated >1000MHz	Title 47 of the CFR: Part 15 Subpart (c)	ANSI C63.10	N/A
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	ANSI C63.10	N/A
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
Intentional Emission Field Strength:	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.215	ANSI C63.10	Pass
Intentional Emission ERP (mW)	Title 47 of the CFR: Part 15 Subpart (c)	ANSI C63.10	N/A
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	ANSI C63.10	Pass
Antenna Arrangements Integral:	Title 47 of the CFR: Part 15 Subpart (c) 15.203	-	Pass
Antenna Arrangements External Connector	Title 47 of the CFR: Part 15 Subpart (c) 15.204	-	-
Restricted Bands	Title 47 of the CFR: Part 15 Subpart (c) 15.205	-	-
Maximum Frequency Of Search	Title 47 of the CFR: Part 15 Subpart (c) 15.33	-	-
Extrapolation Factor	Title 47 of the CFR: Part 15 Subpart (c) 15.31(f)	-	-

Abbreviations used in the above table:

CFR : Code of Federal Regulations
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution
PLCE : Power Line Conducted Emissions

1.6 Notes Relating To the Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

Due to the low level of the signal, any measurements at frequencies < 30MHz were made a distance of 1m.

Section 2:

Measurement Uncertainty

2.1 Measurement Uncertainty Values

For the test data recorded the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,

Uncertainty in time measurement = **0.59%**,

Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**

Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
		Freq	: Frequency
L	: Live Power Line		
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.209(b)(1)
Measurement standard	ANSI C63.10:2009
EUT sample number	S18
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

FREQ. (MHz)	MEASUREMENT DISTANCE Meters	MEASUREMENT Rx. READING (dBµV/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (µV/m)
10.39	1.0	36.5	59.1	0.074
Limit value @ fc		30 µV/m		
Band occupancy @ -20 dBc		f lower		f higher
		10.272 MHz		10.941 MHz
		668.910 kHz		

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ fc = Quasi Peak 10 kHz
 - 3 When battery powered the EUT was powered with new batteries
 - 4 Extrapolation 1 - 30 Meters 59.1 dB as per 15.31(f)
 - 5 Due to the low level of the signal measurements at a distance greater than 1 meter could not be made.
 - 6 All measurement below 30MHz made with loop antenna

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 1m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

A2 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :



1m (at frequencies < 30MHz) and 3m (at frequencies ≥ 30MHz) alternative test site:



The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2009
Frequency range	9kHz – 1000MHz
EUT sample number	S18
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1.	No Significant Emissions Within 20 dB of the limit								

The worst measured noise floor level was 24.5 dBµV/m at 908.1 MHz.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2008 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.

- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A3 Unintentional Radiated Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Section 15.109. The EUT was set to operate in transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :



1m (at frequencies < 30MHz) and 3m (at frequencies ≥ 30MHz) alternative test site:



The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.109
Measurement standard	ANSI C63.10:2009
Frequency range	9kHz – 1000MHz
EUT sample number	S14
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case radiated emission measurements for spurious emissions are listed below:

Ref No.	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
1	No Significant Emissions Within 20 dB of the limit								

The worst measured noise floor level was 24.7 dBµV/m at 940.2 MHz.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2008 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.109 for all emissions:

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels.


	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.


Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

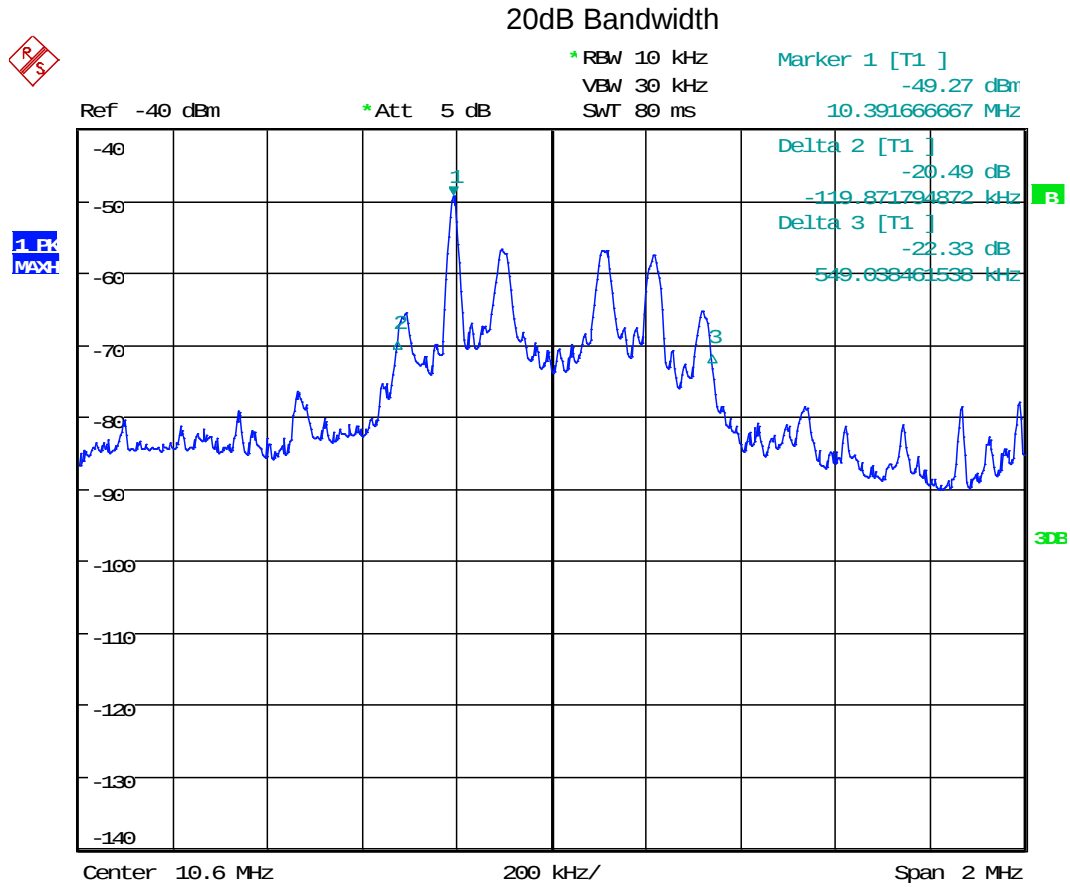


Date: 10.JUL.2014 10:31:22


Radiated spurious emissions 9kHz to 30MHz

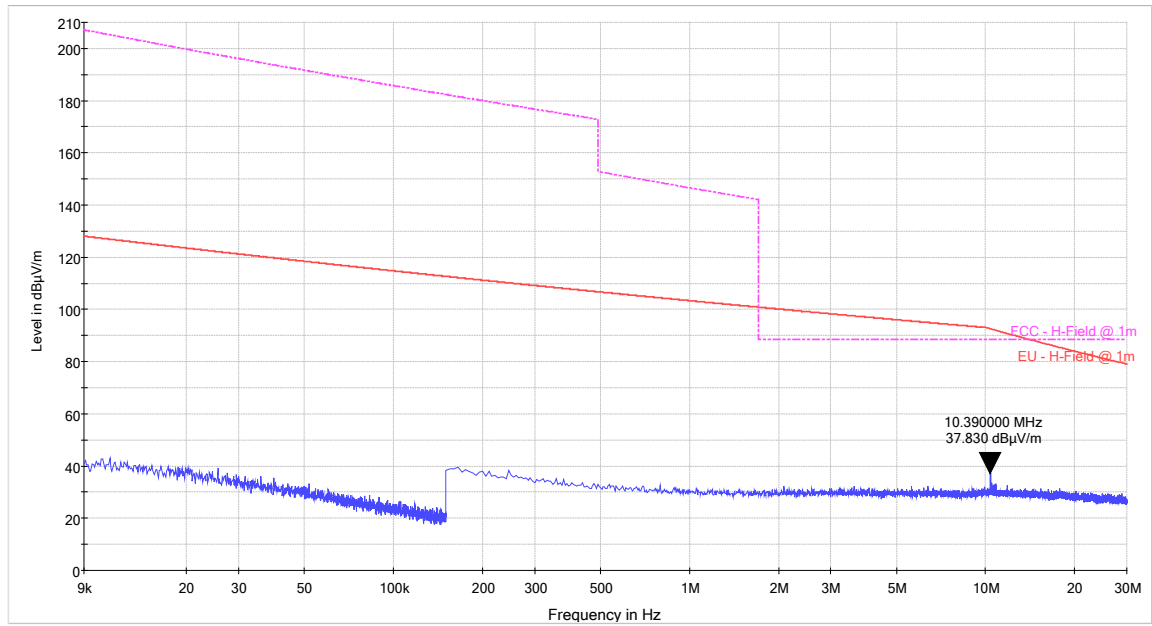


Radiated spurious emissions 30MHz to 1GHz

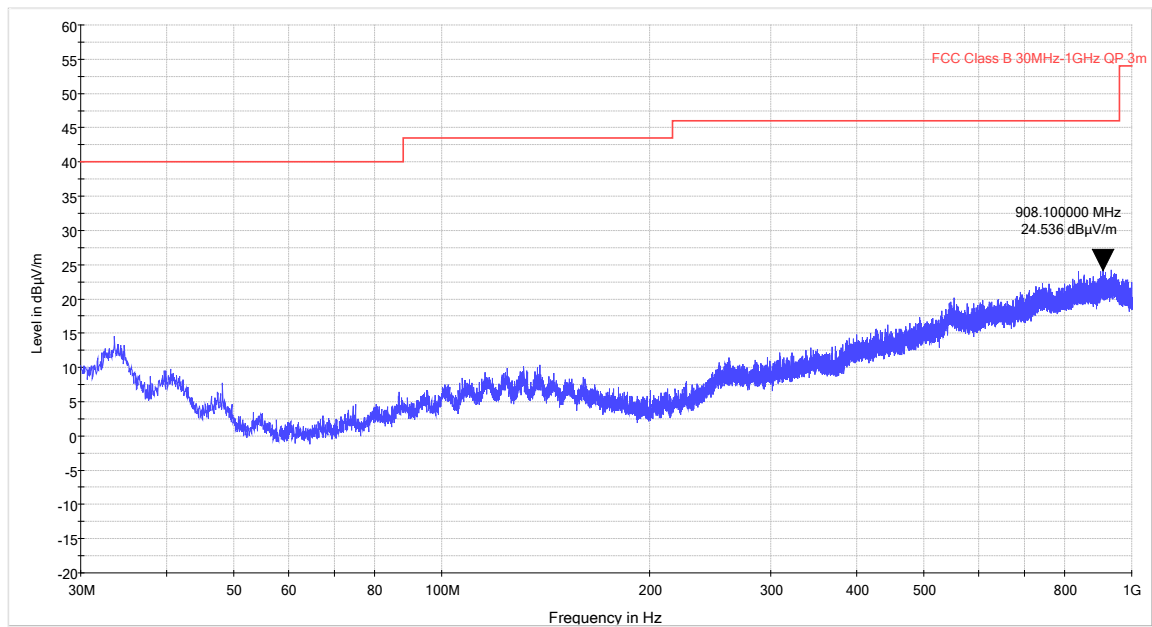

Unintentional Radiated spurious emissions 9kHz to 30MHz

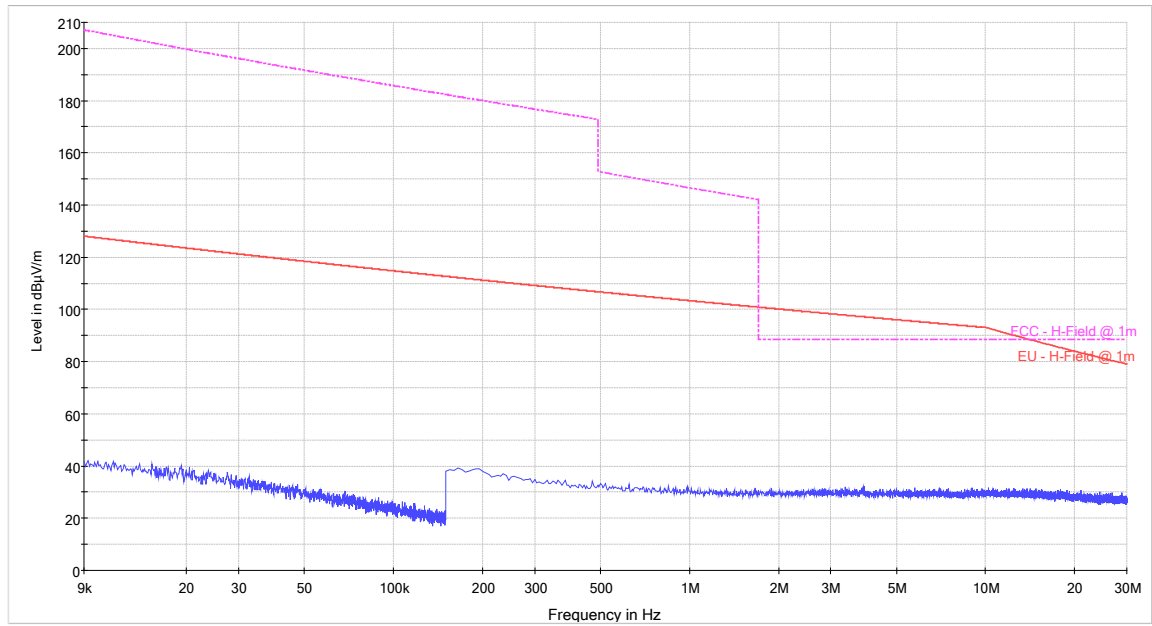

Unintentional Radiated spurious emissions 30MHz to 1GHz

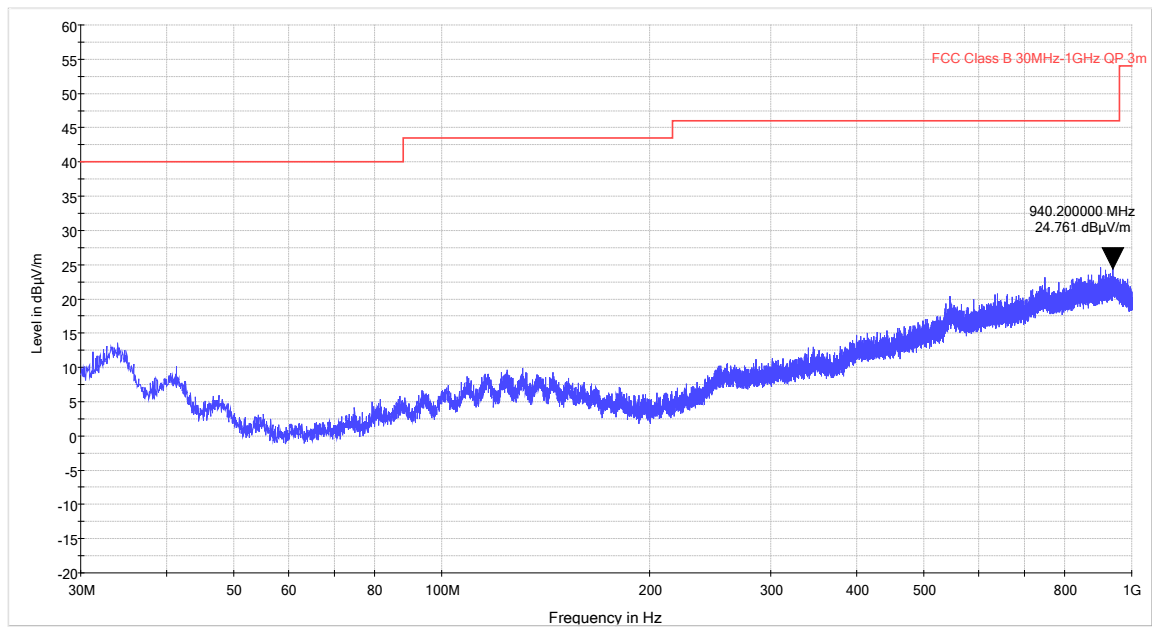

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

Where:

xx	= sample number	e.g. S01
w	= modification number	e.g. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis
- Setting of any internal switches
- Circuit board jumper settings
- Alternative internal power supplies

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Telecoms & Radio upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
S14	U-PA (Normal sample)	123462
S18	U-PA (Constant transmit sample)	123457

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
None		

The following samples of apparatus were supplied by TRaC Telecoms & Radio as support or drive equipment (auxiliary equipment):

Identification	Description
None	

C2) EUT Operating Mode during Testing

During testing, the EUT was exercised as described in the following tables:

Test	Description of Operating Mode: Transmit
REFE: Radiated E-Field (Transmitter carrier output levels dB μ V/m)	The EUT was transmitting continuously on maximum power using FSK (centre frequency 10.6MHz / Deviation $\pm$200kHz) modulation and powered by a new battery.
REFE: Radiated Spurious emissions E-Field at frequencies below 30MHz (dB μ V/m) (15.209)	
Radiated Spurious emissions (E-Field) at frequencies $\geq$ 30MHz (15.209)	
20dB Bandwidth of Emissions	
99% Emission Bandwidth	

Test	Description of Operating Mode: Receive
REFE: 15.109 Radiated Spurious Emissions E-field < 30MHz (Receive)	The EUT was placed in receive mode (non-transmitting) mode during the test and powered by a new battery.
REFE: 15.109 Radiated Spurious Emissions (E-Field) $\geq$ 30MHz (Receive)	

C3) EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4) List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S14 & S18
Tests : All

Port	Description of Cable Attached	Cable length	Equipment Connected
DC Power Port	None	N/A	Zinc-Air 1.25Vdc Battery
Antenna Port	None	N/A	Integral

C5 Details of Equipment Used

TRaC No	Equipment Type	Equipment Description	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH191	CBL611/A	Bilog	Chase	13/12/2012	24	13/12/2014
L007	hfh2	Loop Antenna	R&S	17/10/2013	24	17/10/2015
L317	ESVS10	Receiver	R&S	12/02/2014	12	12/02/2015
REF927		Pre-Amp	SONOMA	01/07/2014	24	01/07/2014
REF940	ATS	Radio Chamber - PP	Rainford EMC	09/07/2013	24	09/07/2015
UH403	ESCI 7	Recevier	R&S	12/08/2013	12	12/08/2014
REF976	34405a	Multimeter	Agilent	19/02/2014	12	19/02/2015
L426	52 Series II	Temperature Indicator	Fluke	22/05/2014	12	22/05/2015
UH405	FSU26	Spectrum Analyser	R&S	16/04/2014	12	16/04/2015
UH100	-	PSU	Thandar	Cal in use		
L011	-	Temp Chamber	Sharetree	Cal in use		

Appendix D:

Additional Information

This report contains no additional information

Appendix E:

Calculation of the duty cycle correction factor

No average detector measurements were made during testing; therefore this calculation is not required

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated emissions arrangement (at frequencies $\geq 30\text{MHz}$): overview

Photograph 1



Appendix G:**MPE Calculation****KDB 447498**

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when the considering SAR exclusion Threshold requirement in KDB 447498 is satisfied standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

In the frequency range below 100 MHz and test separation distance $\leq 50\text{mm}$, the SAR Test Exclusion Threshold will be determined as follows

SAR Exclusion Threshold

$$NT = \{ [(MP/TSD) * \sqrt{f_{\text{GHz}}}] + (TSD - 50\text{mm}) * f_{(\text{MHz})}/150] \} * \{ 1 + \text{Log} [100 / f_{\text{MHz}}] \} * ^{1/2}$$

Where:

MP	=	Max Power of channel (mW) (inc tune up)
NT	=	Numeric Threshold (3mW for 1-g SAR and 7.5 for 10-g SAR)
TSD	=	Min Test separation Distance (mm) = 50
f_{GHz}	=	Transmit frequency (or 100MHz if lower)
F_{MHz}	=	Transmit frequency

We can transpose this formula to allow us to find the maximum power of a channel allowed and compare this to the measured maximum power.

$$\begin{aligned} MP &= \{ [(NT \times TSD) / \sqrt{f_{\text{GHz}}}] + (50 - 50) * [100/150] \} * \{ 1 + \text{Log} [100 / F_{\text{MHz}}] * ^{1/2} \} \\ MP &= \{ [(3.0 \times 50) / \sqrt{0.1}] + (50 - 50) * [100/150] \} * \{ 1 + \text{Log} [100 / F_{\text{MHz}}] * ^{1/2} \} \\ MP &= 474 * \{ 1 + \text{Log} [100 / 10.6] * ^{1/2} \} \\ MP &= 468 \text{ mW} \end{aligned}$$

The calculated output power is $1.64 \times 10^{-10} \text{mW}$ (eirp) is less than the SAR Exclusion Threshold of 468mW, at 5mm test separation distance, for general population and uncontrolled exposure. Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{EIRP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{EIRP}{S 4\pi}}$$

Where:

S = power density

R = distance to the centre of radiation of the antenna

EIRP = EUT Maximum power

Note:

The EIRP value was determined using the peak E Field measurement.

Result

Prediction Frequency (MHz)	Maximum EIRP (mW)	Power density limit (S) (mW/cm ²)	Distance (R) cm required to be less than 1.67mW/cm ²
10.39	1.64x10 ⁻¹⁰	1.67	2.80 x 10 ⁻⁶

Appendix H:**Cross Reference FCC Part 15c to IC RSS 210**


The testing of the UNIQUE-Passion (U-PA) was carried out to FCC 47CFR Part 15c and the results for this testing can be found in Appendix A of this report.

All measurements were carried out in accordance with ANSI C63.4, 'Methods of Measurements of RF Emissions from low voltage Electrical and Electronic Equipment in the Range 9kHz to 40GHz'.

The table below shows the applicable RSS-210 Issue 8/RSS-Gen Issue 3 parts and the corresponding FCC 47CFR Part 15 rules:

RSS-Gen/RSS-210	FCC 47CFR Part 15
RSS-210 Section 2.5	Part 15.109
RSS-Gen Section 7.2.5	Part 15.209

In addition below is a plot of the 99% emissions bandwidth, as stipulated in Section 4.6.1 of RSS-Gen Issue 3.

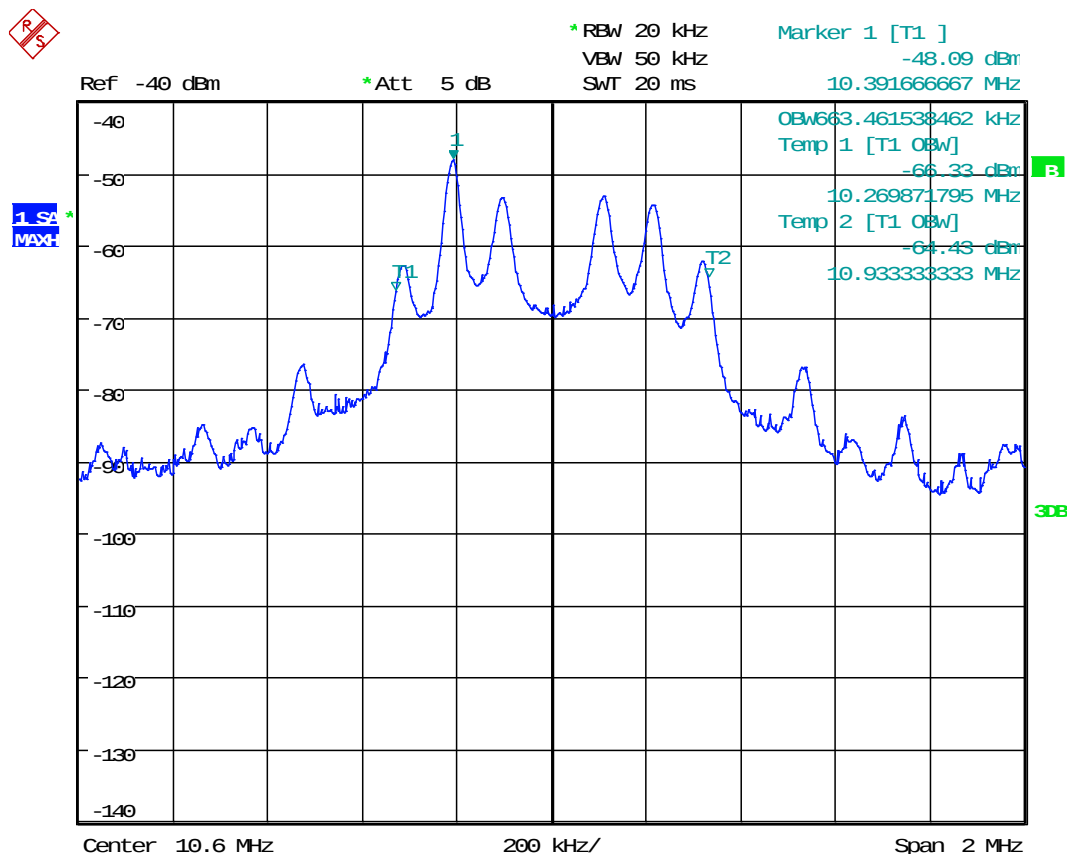

Date: 10.JUL.2014 10:41:58



HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.

T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com