



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 15.407, RSS-247 Issue 2

Report No.: MIKO101-U17_Conducted Rev A

Company: Mikrotiks SIA (MikroTik)

Model Name: RBD23UGS-5HPacD2HnD-NM-US,
RBD22UGS-5HPacD2HnD-15S-US

REGULATORY COMPLIANCE TEST REPORT

Company: Mikrotikls SIA (MikroTik)

Model Name: RBD23UGS-5HPacD2HnD-NM-US, RBD22UGS-5HPacD2HnD-15S-US

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: MIKO101-U17_Conducted Rev A

This report supersedes: NONE

Applicant: Mikrotikls SIA (MikroTik)
Brivibas gatve 214i
Riga, LV-1039
Latvia

Issue Date: 17th September 2020

Master Document Number	Addendum Reports
MIKO101-U17_Master	MIKO101-U17_Conducted
	MIKO101-U17_Radiated
	MIKO101-U17_DFS

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. TEST RESULTS.....	4
1.1. Peak Transmit Power.....	4
1.2. 26 dB & 99% Bandwidth	22
1.3. Power Spectral Density	31
A. APPENDIX - GRAPHICAL IMAGES.....	49
A.1. 26 dB & 99% Bandwidth	50
A.2. Power Spectral Density	92

1. TEST RESULTS

1.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407 RSS-247 Issue 2	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)(2) RSS-247: 6.2.2, 6.2.3	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation (Σ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Conducted Output Power

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are

used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.04 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	13.66	15.79			17.90	19.719	23.00	-5.10	Default
5300.0	13.35	16.02			17.94	19.479	23.00	-5.06	Default
5320.0	13.53	16.24			18.14	19.479	23.00	-4.86	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.86 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5290.0	9.18	11.85			13.73	89.138	23.00	-8.41	16.0

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.09 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	13.71	15.87			18.02	20.842	23.00	-4.98	Default
5300.0	13.36	15.99			17.97	20.762	23.00	-5.03	Default
5320.0	12.68	16.15			17.85	20.762	23.00	-5.15	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.32 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5270.0	13.45	16.54			18.63	40.401	23.00	-4.37	Default
5310.0	13.16	16.72			18.67	40.401	23.00	-4.33	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.04 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	13.62	16.48			18.29	19.319	23.00	-4.67	20.00
5580.0	13.19	16.72			18.31	19.800	23.00	-4.65	20.00
5720.0	10.48	16.45			17.43	19.639	23.00	-5.53	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.86 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5530.0	2.90	5.41			7.34	85.611	23.00	-15.66	9.00
5610.0	12.66	16.68			18.13	87.856	23.00	-4.01	20.00
5690.0	11.38	16.69			17.81	93.948	23.00	-4.33	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.09 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	13.88	16.54			18.51	20.681	23.00	-4.49	20.00
5580.0	13.35	16.72			18.45	20.762	23.00	-4.55	20.00
5720.0	10.35	16.38			17.44	20.681	23.00	-5.56	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	93.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.32 dB)	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5510.0	11.98	15.05			16.79	40.240	23.00	-6.21	18.00
5550.0	14.04	17.15			19.24	40.080	23.00	-3.76	20.00
5710.0	11.33	17.03			18.43	40.401	23.00	-4.57	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

19 dBi Antenna (For ISSED RSS 247 EIRP Limits)

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.04 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	1.86	1.91			4.94	16.673	27.00	-3.06	Default
5300.0	1.36	2.05			4.77	16.673	27.00	-3.23	Default
5320.0	0.58	1.10			3.90	16.593	27.00	-4.10	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.86 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5290.0	2.93	3.59			7.14	76.313	27.00	-0.86	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.09 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	1.26	1.44			4.45	17.876	27.00	-3.55	Default
5300.0	0.84	1.71			4.40	17.796	27.00	-3.60	Default
5320.0	0.18	0.88			3.64	17.876	27.00	-4.36	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.32 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5270.0	0.51	0.80			4.53	36.072	27.00	-3.47	Default
5310.0	-0.87	-0.07			3.42	36.232	27.00	-4.58	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	98.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.04 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	3.03	4.35			6.79	16.593	27.00	-1.21	Default
5580.0	1.63	4.45			6.32	16.673	27.00	-1.68	Default
5720.0	0.65	5.02			6.41	16.593	27.00	-1.59	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.86 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5530.0	1.74	3.92			6.84	76.313	27.00	-1.16	8.00
5610.0	0.35	3.93			6.37	75.992	27.00	-1.63	8.00
5690.0	-0.72	3.91			6.06	76.313	27.00	-1.94	8.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.09 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	0.83	2.07			4.59	17.796	27.00	-3.41	Default
5580.0	-0.52	2.20			4.15	17.956	27.00	-3.85	Default
5720.0	-1.72	2.92			4.29	17.876	27.00	-3.71	Default

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power + DCCF (+0.32 dB)	Minimum 99% Bandwidth	EIRP Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5510.0	0.96	2.61			5.23	36.232	27.00	-2.77	10.00
5550.0	0.85	3.51			5.75	36.232	27.00	-2.25	10.00
5710.0	-1.33	3.30			4.95	36.072	27.00	-3.05	10.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements include a Duty Cycle Correction Factor (DCCF).

1.2. 26 dB & 99% Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407 RSS-247 Issue 2	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a) 2 RSS-247: 6.2.2; 6.2.3	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 26 dB and 99% Bandwidth Measurement The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5260.0	19.719	20.040			20.040	19.719		
5300.0	19.479	20.040			20.040	19.479		
5320.0	19.479	19.880			19.880	19.479		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5260.0	16.673	16.754			16.754	16.673		
5300.0	16.673	16.754			16.754	16.673		
5320.0	16.593	16.754			16.754	16.593		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5290.0	89.138	91.062			91.062	89.138		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5290.0	76.633	76.313			76.633	76.313		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5260.0	20.842	20.842			20.842	20.842		
5300.0	20.762	20.762			20.762	20.762		
5320.0	20.762	20.842			20.842	20.762		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5260.0	17.876	17.876			17.876	17.876		
5300.0	17.796	17.876			17.876	17.796		
5320.0	17.876	17.876			17.876	17.876		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5270.0	40.561	40.401			40.561	40.401		
5310.0	40.401	40.561			40.561	40.401		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5270.0	36.072	36.232			36.232	36.072		
5310.0	36.232	36.232			36.232	36.232		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Results - 26 dB Bandwidth Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5500.0	19.319	20.040			20.040	19.319		
5580.0	19.800	20.120			20.120	19.800		
5720.0	19.639	19.960			19.960	19.639		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5500.0	16.593	16.754			16.754	16.593		
5580.0	16.673	16.754			16.754	16.673		
5720.0	16.593	16.834			16.834	16.593		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5530.0	85.611	90.741			90.741	85.611		
5610.0	87.856	92.986			92.986	87.856		
5690.0	93.948	95.551			95.551	93.948		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5530.0	76.313	76.313			76.313	76.313		
5610.0	75.992	76.313			76.313	75.992		
5690.0	76.313	76.633			76.633	76.313		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5500.0	20.681	20.681			20.681	20.681		
5580.0	20.762	20.922			20.922	20.762		
5720.0	20.681	21.082			21.082	20.681		
Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5500.0	17.796	17.796			17.796	17.796		
5580.0	17.956	17.956			17.956	17.956		
5720.0	17.876	17.956			17.956	17.876		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	93.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5510.0	40.561	40.240			40.561	40.240		
5550.0	40.080	40.561			40.561	40.080		
5710.0	40.401	40.561			40.561	40.401		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)							
MHz	a	b	c	d	Highest	Lowest		
5510.0	36.232	36.232			36.232	36.232		
5550.0	36.232	36.232			36.232	36.232		
5710.0	36.072	36.232			36.232	36.072		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

1.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)(2) RSS-247: 6.2.2, 6.2.3	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (Σ) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log (1/x) \text{ dBm}$

$A = \text{Total Power Spectral Density } [10 \cdot \log(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

Limits Power Spectral Density

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any

corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	1.273	3.494			5.567	10.0	-4.4
5300.0	1.590	3.886			5.898	10.0	-4.1
5320.0	1.798	3.939			6.023	10.0	-4.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.86 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5290.0	-5.213	-2.678			-0.040	10.0	-10.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	0.801	3.117			5.193	10.0	-4.8
5300.0	1.096	3.194			5.317	10.0	-4.7
5320.0	0.369	3.520			5.288	10.0	-4.7

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.36 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	-1.546	1.575			3.570	10.0	-6.4
5310.0	-1.725	1.702			3.650	10.0	-6.4

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	1.050	3.902			5.707	10.0	-4.3
5580.0	0.059	3.894			5.416	10.0	-4.6
5720.0	-1.546	3.797			4.940	10.0	-5.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.86 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	-4.830	-2.444			0.375	10.0	-9.6
5610.0	-6.140	-2.144			0.106	10.0	-9.9
5690.0	-7.011	-2.469			-0.390	10.0	-10.4

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	0.930	3.464			5.446	10.0	-4.6
5580.0	-0.200	3.445			5.081	10.0	-4.9
5720.0	-2.235	3.108			4.292	10.0	-5.7

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	93.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	7.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.32 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	-1.578	1.199			3.177	10.0	-6.8
5550.0	-0.942	1.524			3.738	10.0	-6.3
5710.0	-4.038	1.409			2.761	10.0	-7.2

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

19 dBi Antenna (For ISSED RSS 247 Limits)

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	-9.583	-9.582			-7.122	-2.0	-5.1
5300.0	-9.847	-9.704			-7.625	-2.0	-5.6
5320.0	-10.976	-10.475			-8.024	-2.0	-6.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.86 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5290.0	-17.613	-17.128			-13.831	-2.0	-11.8

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	-10.586	-10.531			-8.045	-2.0	-6.1
5300.0	-11.187	-10.798			-8.193	-2.0	-6.2
5320.0	-12.188	-11.643			-9.257	-2.0	-7.3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.36 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	-14.882	-14.751			-12.082	-2.0	-10.1
5310.0	-16.216	-15.185			-12.842	-2.0	-10.9

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	98.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	-8.750	-7.707			-5.555	-2.0	-3.6
5580.0	-10.587	-7.675			-5.951	-2.0	-4.0
5720.0	-11.239	-6.874			-5.868	-2.0	-3.9

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.86 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	-19.074	-16.534			-13.985	-2.0	-12.0
5610.0	-19.181	-16.350			-14.462	-2.0	-12.5
5690.0	-19.523	-16.440			-14.533	-2.0	-12.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	98.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.09 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	-11.554	-10.343			-8.125	-2.0	-6.1
5580.0	-12.379	-10.045			-8.326	-2.0	-6.3
5720.0	-13.543	-10.326			-8.779	-2.0	-6.8

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	92.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	19.00
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.36 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	-14.270	-12.708			-10.556	-2.0	-8.6
5550.0	-14.615	-12.437			-10.263	-2.0	-8.3
5710.0	-16.788	-12.909			-11.084	-2.0	-9.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).


A. APPENDIX - GRAPHICAL IMAGES

A.1. 26 dB & 99% Bandwidth



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

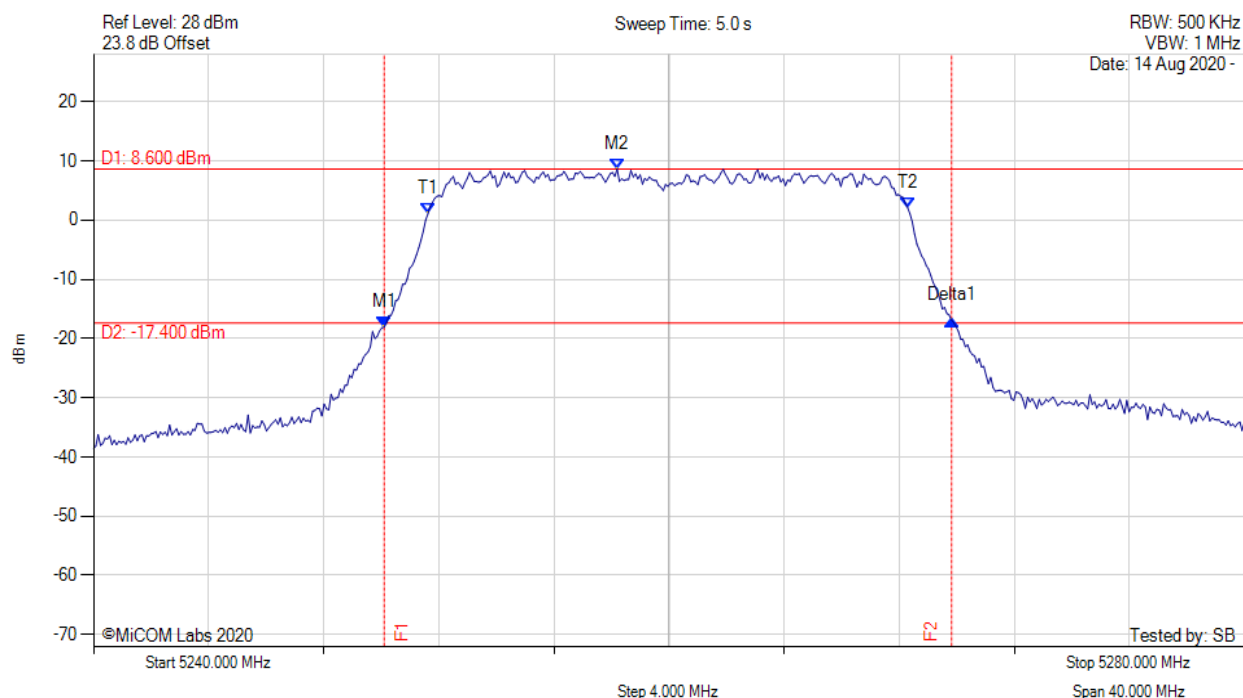


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5250.100 MHz : -18.056 dBm M2 : 5258.196 MHz : 8.600 dBm Delta1 : 19.719 MHz : 1.186 dB T1 : 5251.623 MHz : 1.059 dBm T2 : 5268.297 MHz : 2.088 dBm OBW : 16.673 MHz	Measured 26 dB Bandwidth: 19.719 MHz Measured 99% Bandwidth: 16.673 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

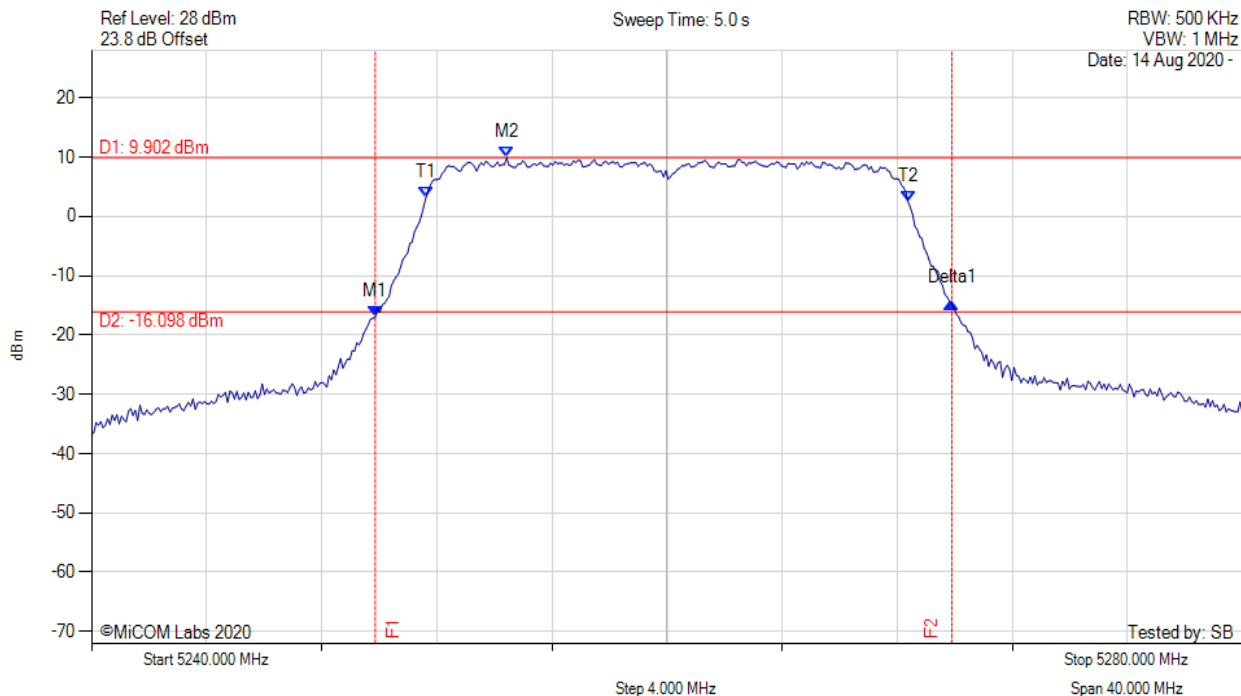


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.860 MHz : -16.999 dBm M2 : 5254.429 MHz : 9.902 dBm Delta1 : 20.040 MHz : 2.369 dB T1 : 5251.623 MHz : 3.160 dBm T2 : 5268.377 MHz : 2.509 dBm OBW : 16.754 MHz	Measured 26 dB Bandwidth: 20.040 MHz Measured 99% Bandwidth: 16.754 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

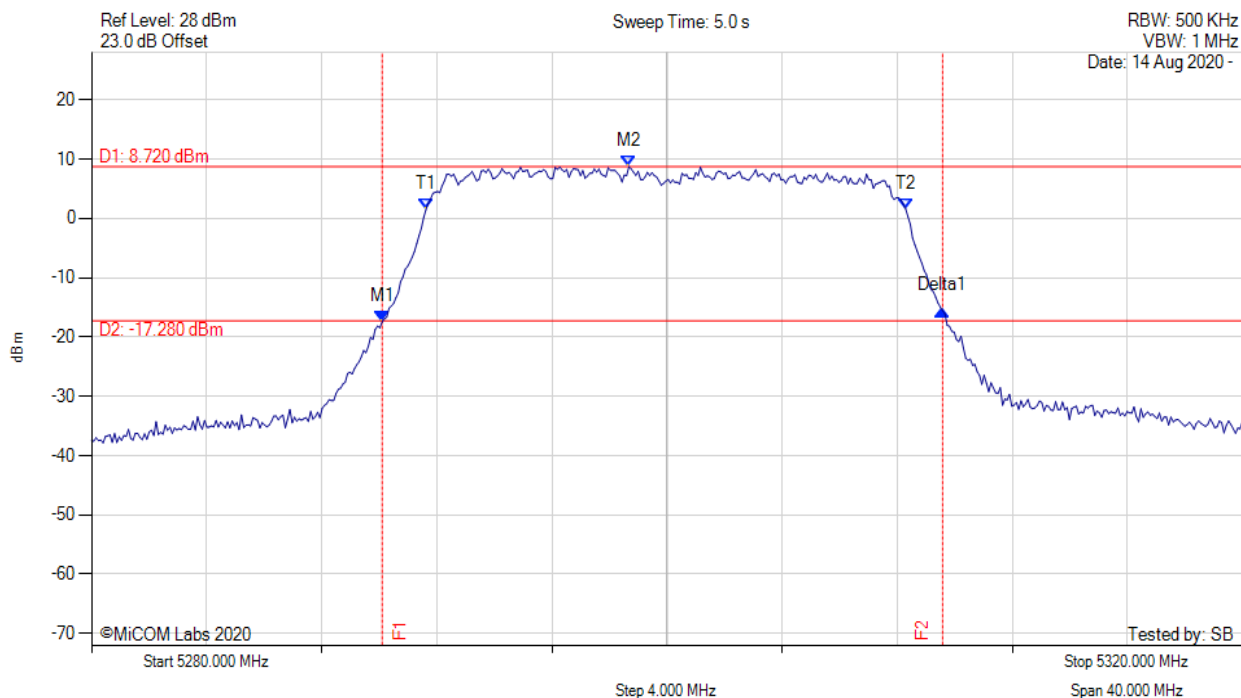


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5290.100 MHz : -17.440 dBm M2 : 5298.677 MHz : 8.720 dBm Delta1 : 19.479 MHz : 1.902 dB T1 : 5291.623 MHz : 1.480 dBm T2 : 5308.297 MHz : 1.565 dBm OBW : 16.673 MHz	Measured 26 dB Bandwidth: 19.479 MHz Measured 99% Bandwidth: 16.673 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

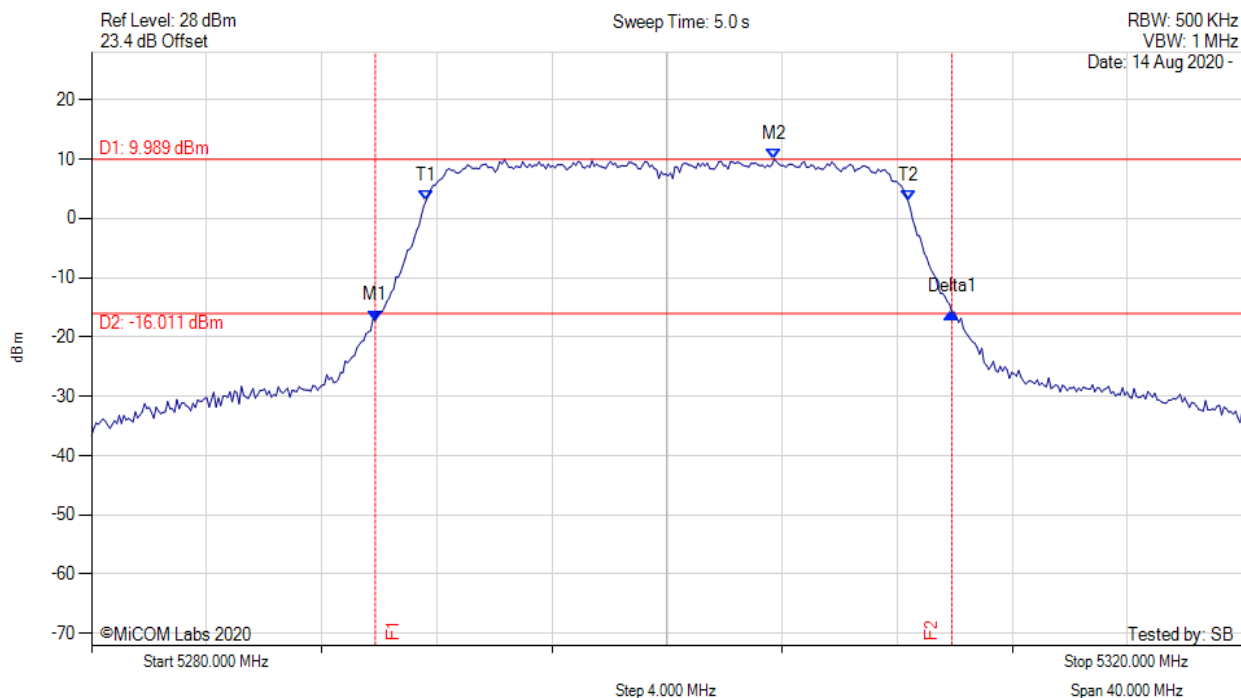


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5289.860 MHz : -17.241 dBm M2 : 5303.727 MHz : 9.989 dBm Delta1 : 20.040 MHz : 1.387 dB T1 : 5291.623 MHz : 2.930 dBm T2 : 5308.377 MHz : 2.969 dBm OBW : 16.754 MHz	Measured 26 dB Bandwidth: 20.040 MHz Measured 99% Bandwidth: 16.754 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

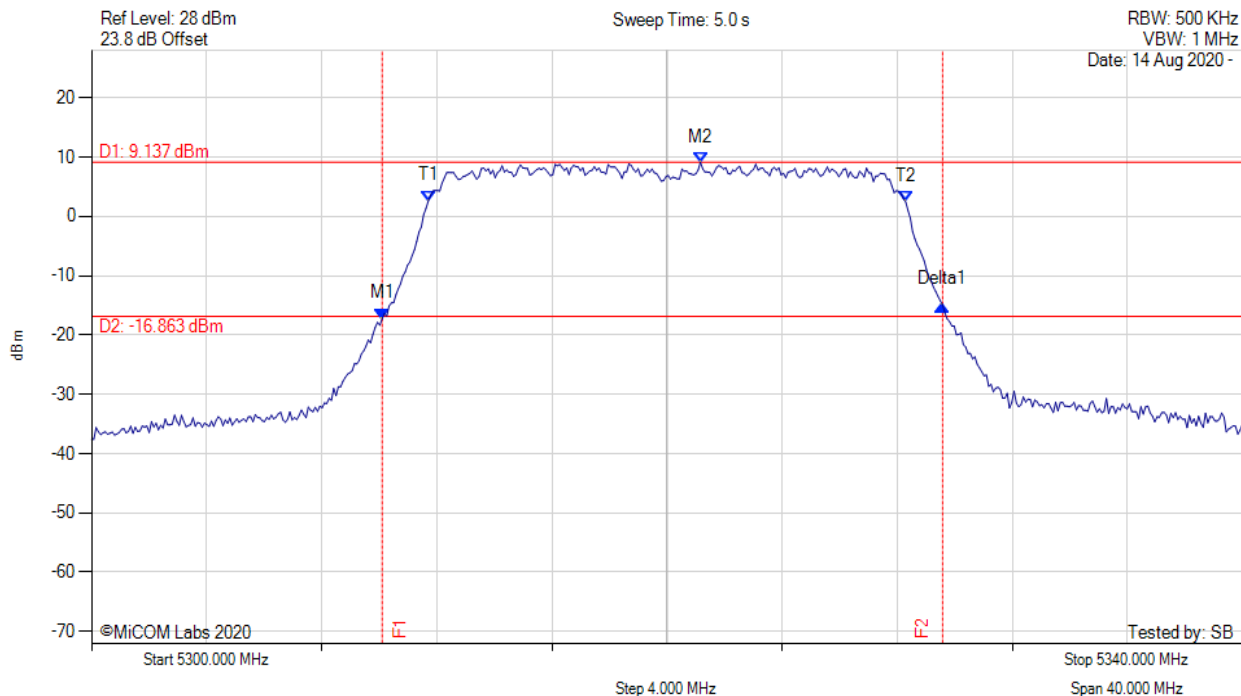


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5310.100 MHz : -17.241 dBm M2 : 5321.162 MHz : 9.137 dBm Delta1 : 19.479 MHz : 2.331 dB T1 : 5311.703 MHz : 2.615 dBm T2 : 5328.297 MHz : 2.442 dBm OBW : 16.593 MHz	Measured 26 dB Bandwidth: 19.479 MHz Measured 99% Bandwidth: 16.593 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

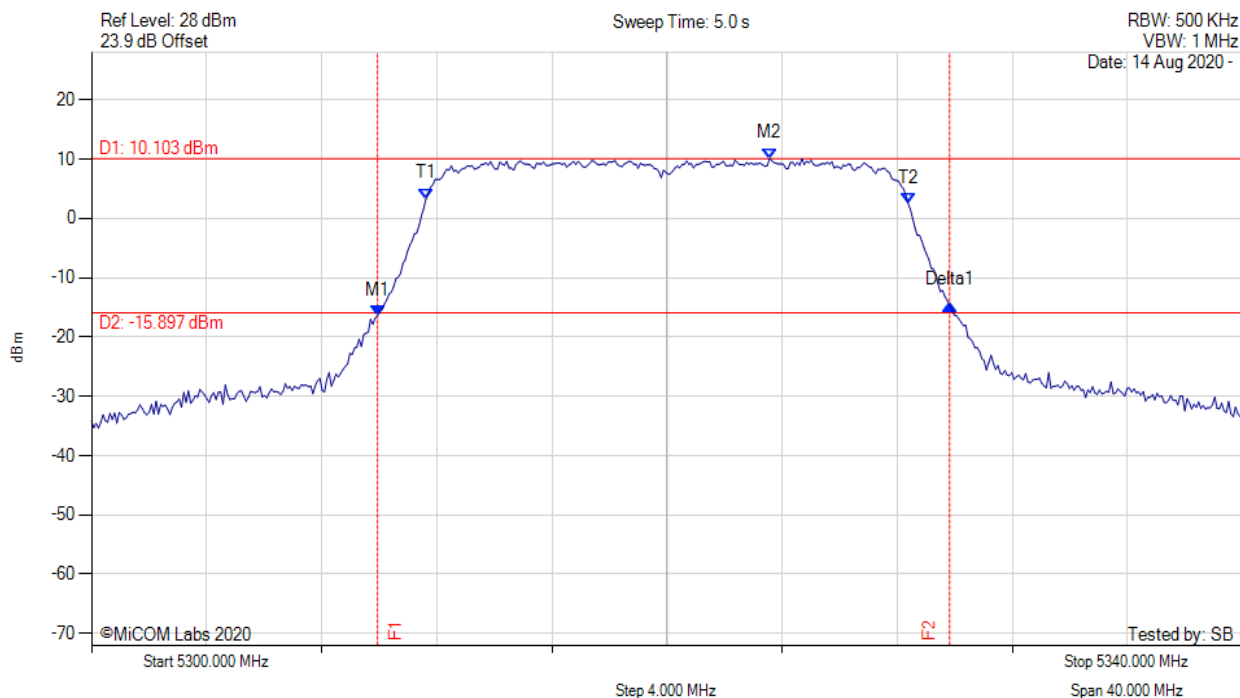


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5309.940 MHz : -16.360 dBm M2 : 5323.567 MHz : 10.103 dBm Delta1 : 19.880 MHz : 1.808 dB T1 : 5311.623 MHz : 3.308 dBm T2 : 5328.377 MHz : 2.590 dBm OBW : 16.754 MHz	Measured 26 dB Bandwidth: 19.880 MHz Measured 99% Bandwidth: 16.754 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

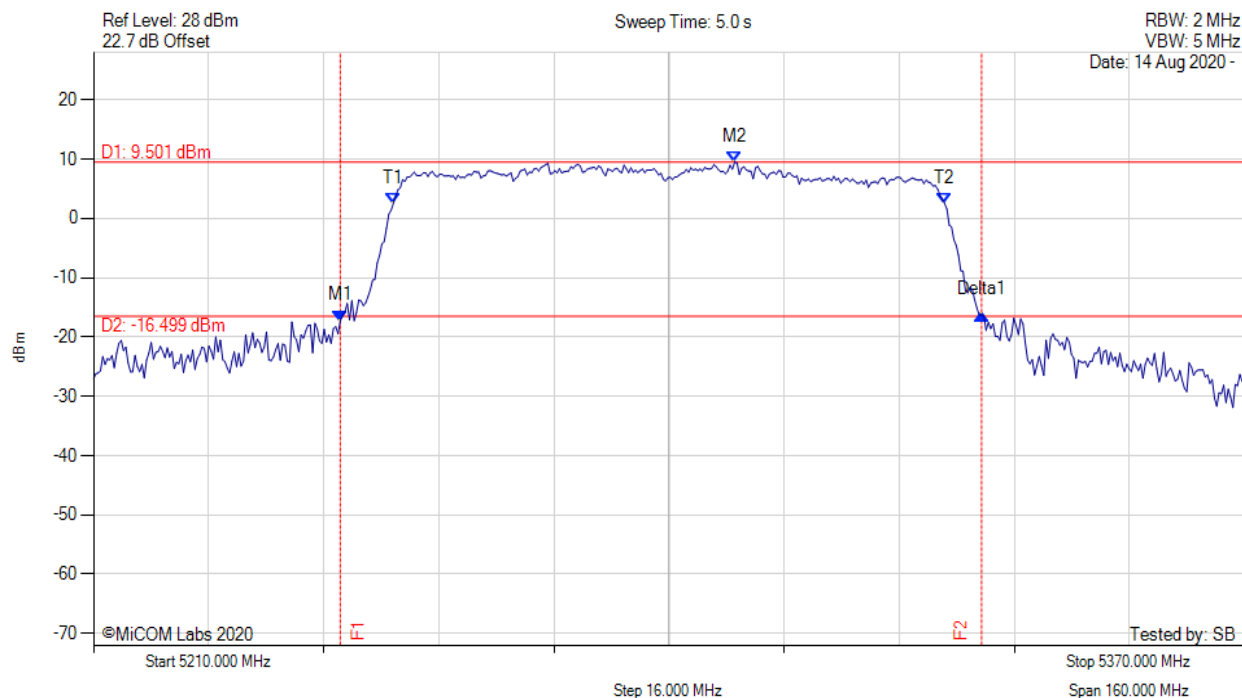


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5244.309 MHz : -17.241 dBm M2 : 5299.138 MHz : 9.501 dBm Delta1 : 89.138 MHz : 0.964 dB T1 : 5251.683 MHz : 2.521 dBm T2 : 5328.317 MHz : 2.521 dBm OBW : 76.633 MHz	Measured 26 dB Bandwidth: 89.138 MHz Measured 99% Bandwidth: 76.633 MHz

[back to matrix](#)

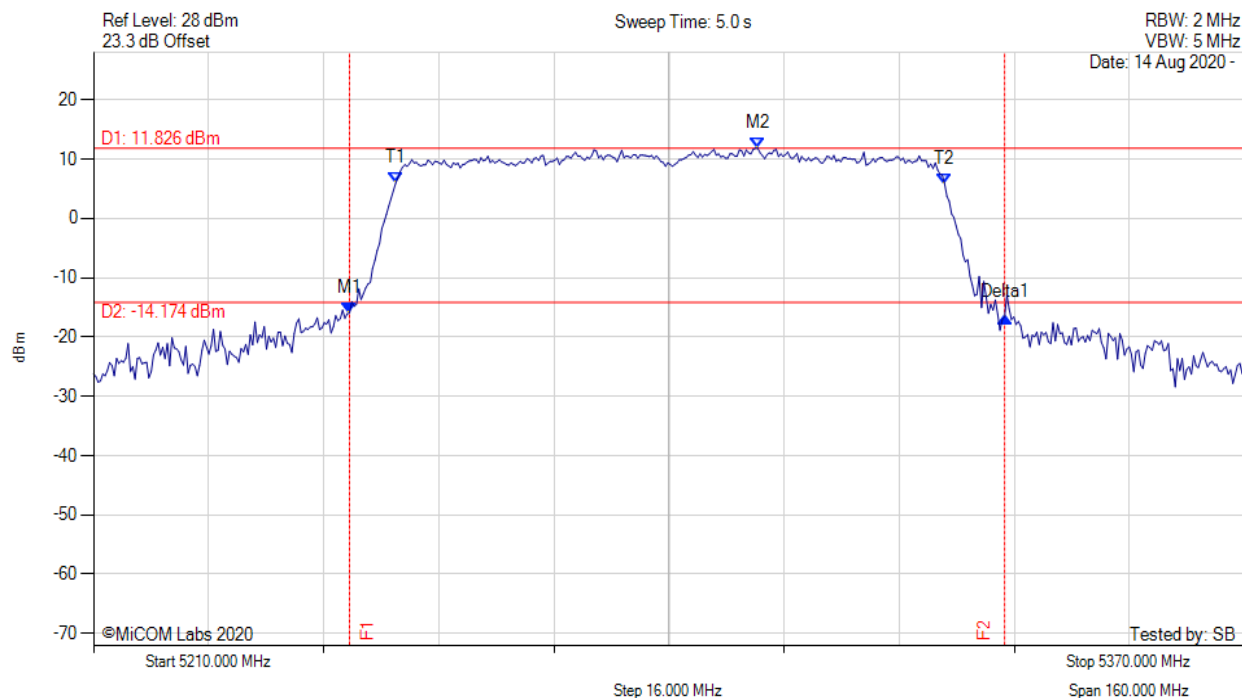

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5245.591 MHz : -15.937 dBm M2 : 5302.345 MHz : 11.826 dBm Delta1 : 91.062 MHz : -0.675 dB T1 : 5252.004 MHz : 5.948 dBm T2 : 5328.317 MHz : 5.828 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 91.062 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

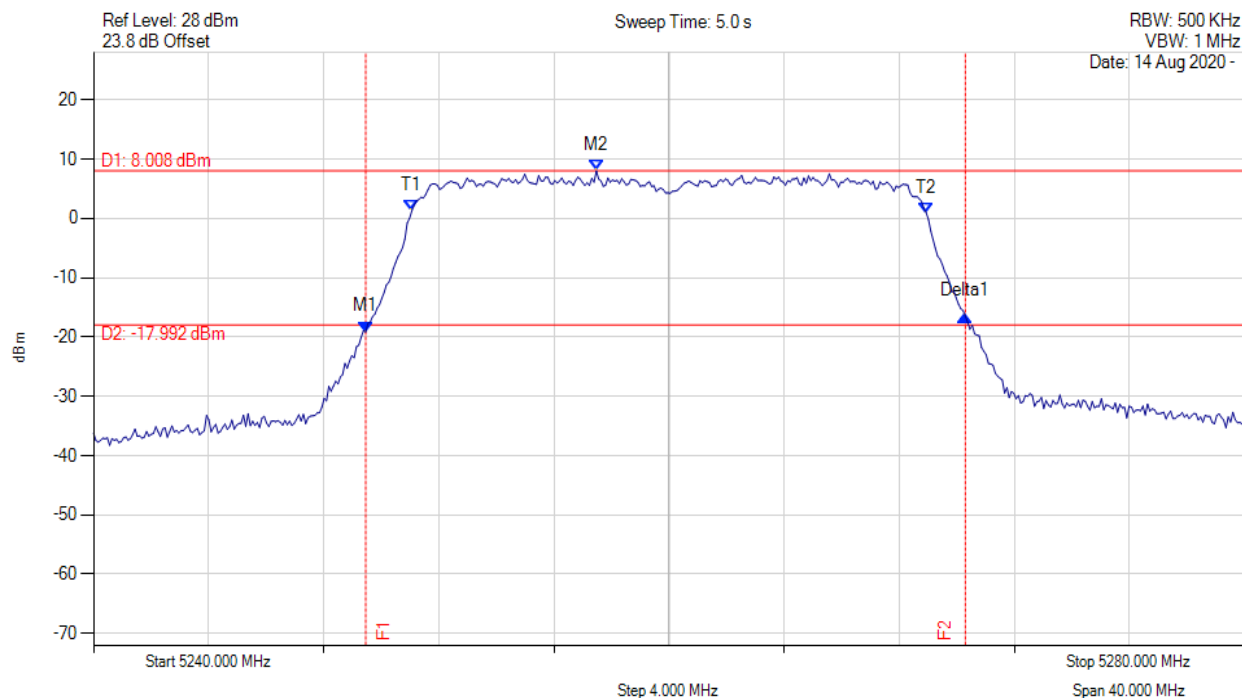


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.459 MHz : -19.124 dBm M2 : 5257.475 MHz : 8.008 dBm Delta1 : 20.842 MHz : 2.636 dB T1 : 5251.062 MHz : 1.275 dBm T2 : 5268.938 MHz : 0.961 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.842 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

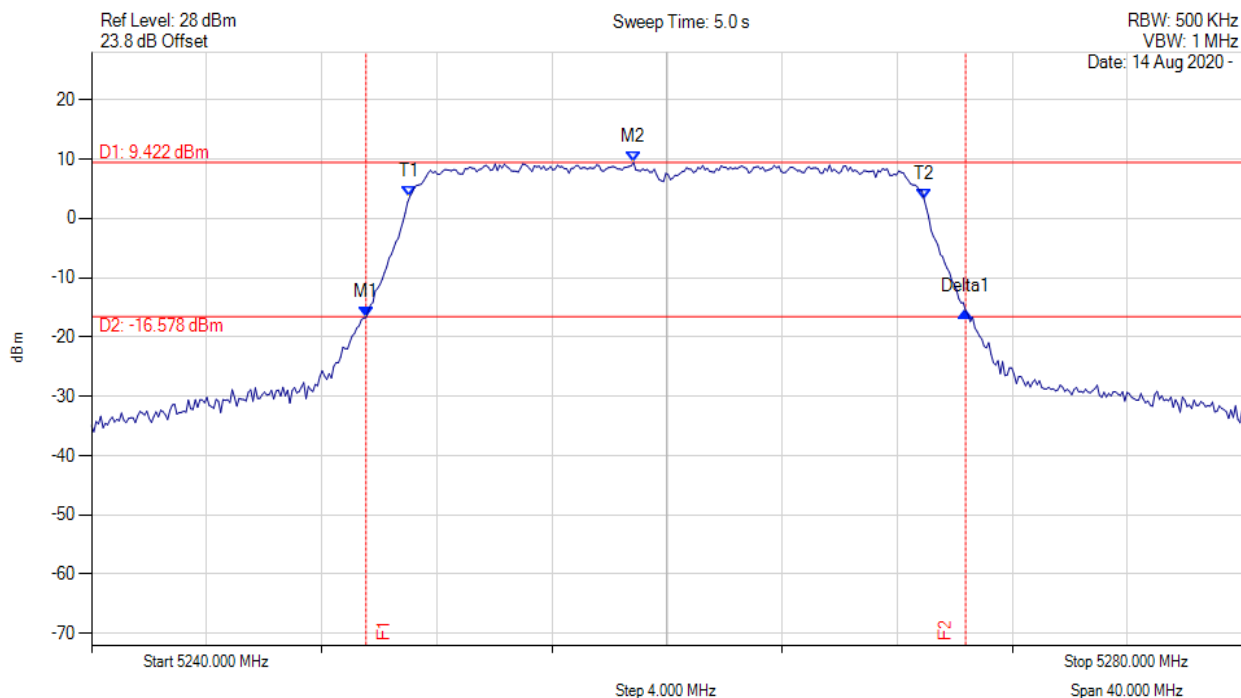


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.539 MHz : -16.730 dBm M2 : 5258.838 MHz : 9.422 dBm Delta1 : 20.842 MHz : 1.070 dB T1 : 5251.062 MHz : 3.676 dBm T2 : 5268.938 MHz : 3.162 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.842 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

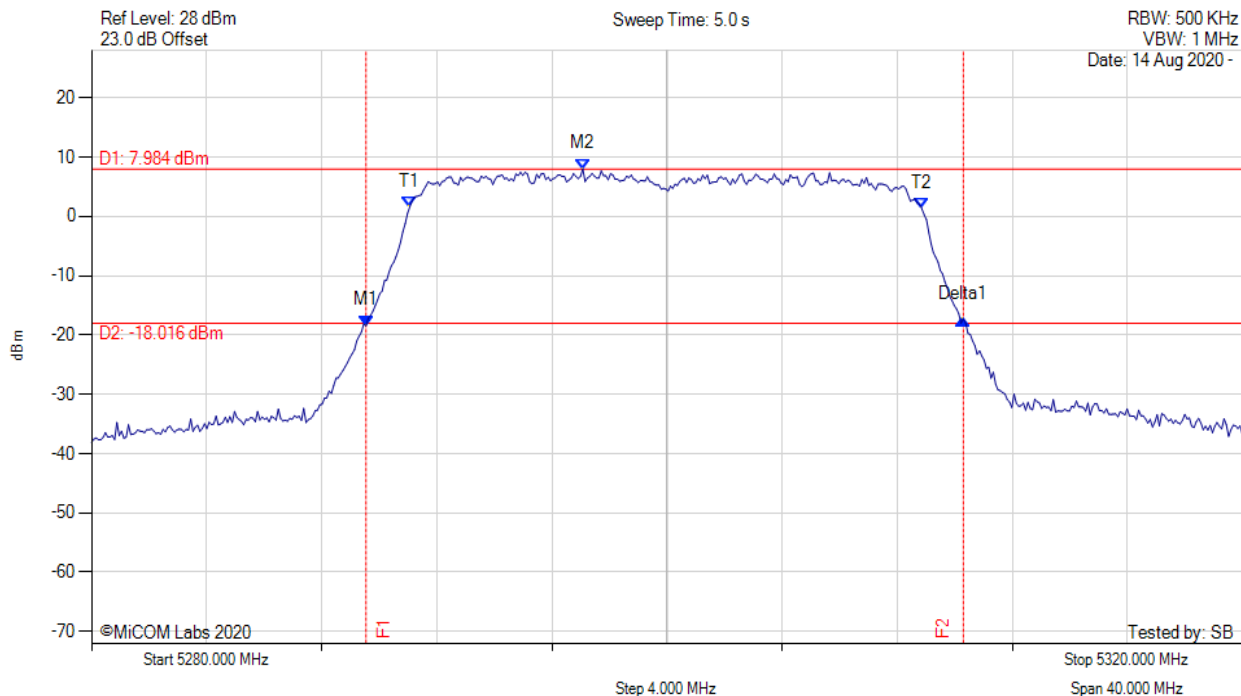

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5289.539 MHz : -18.424 dBm M2 : 5297.074 MHz : 7.984 dBm Delta1 : 20.762 MHz : 1.117 dB T1 : 5291.062 MHz : 1.610 dBm T2 : 5308.858 MHz : 1.285 dBm OBW : 17.796 MHz	Measured 26 dB Bandwidth: 20.762 MHz Measured 99% Bandwidth: 17.796 MHz

[back to matrix](#)

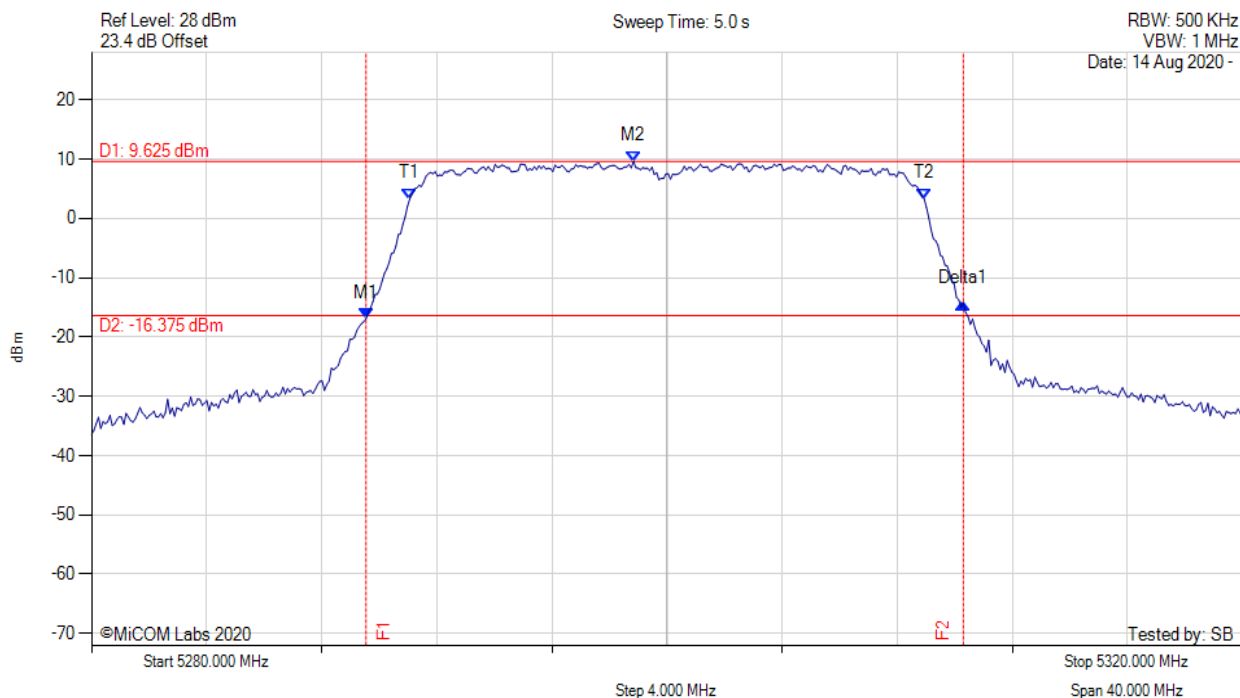


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5289.539 MHz : -16.954 dBm M2 : 5298.838 MHz : 9.625 dBm Delta1 : 20.762 MHz : 2.664 dB T1 : 5291.062 MHz : 3.316 dBm T2 : 5308.938 MHz : 3.302 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.762 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

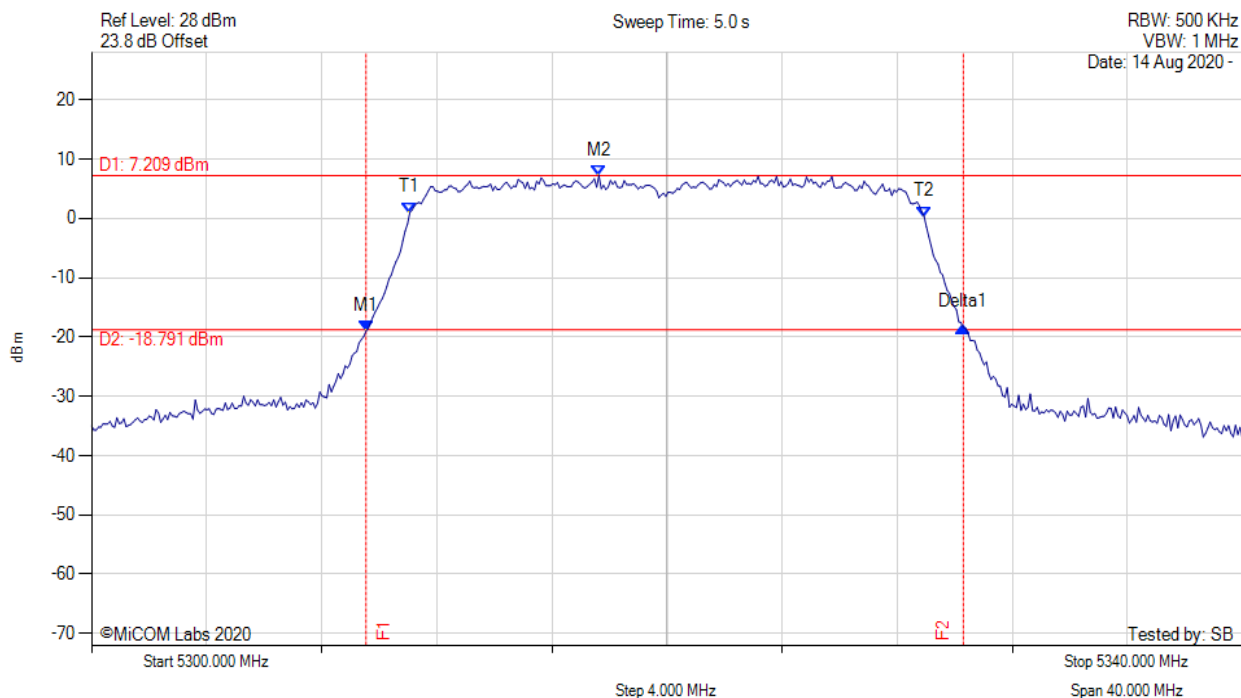

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5309.539 MHz : -19.024 dBm M2 : 5317.635 MHz : 7.209 dBm Delta1 : 20.762 MHz : 0.706 dB T1 : 5311.062 MHz : 0.965 dBm T2 : 5328.938 MHz : 0.282 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.762 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

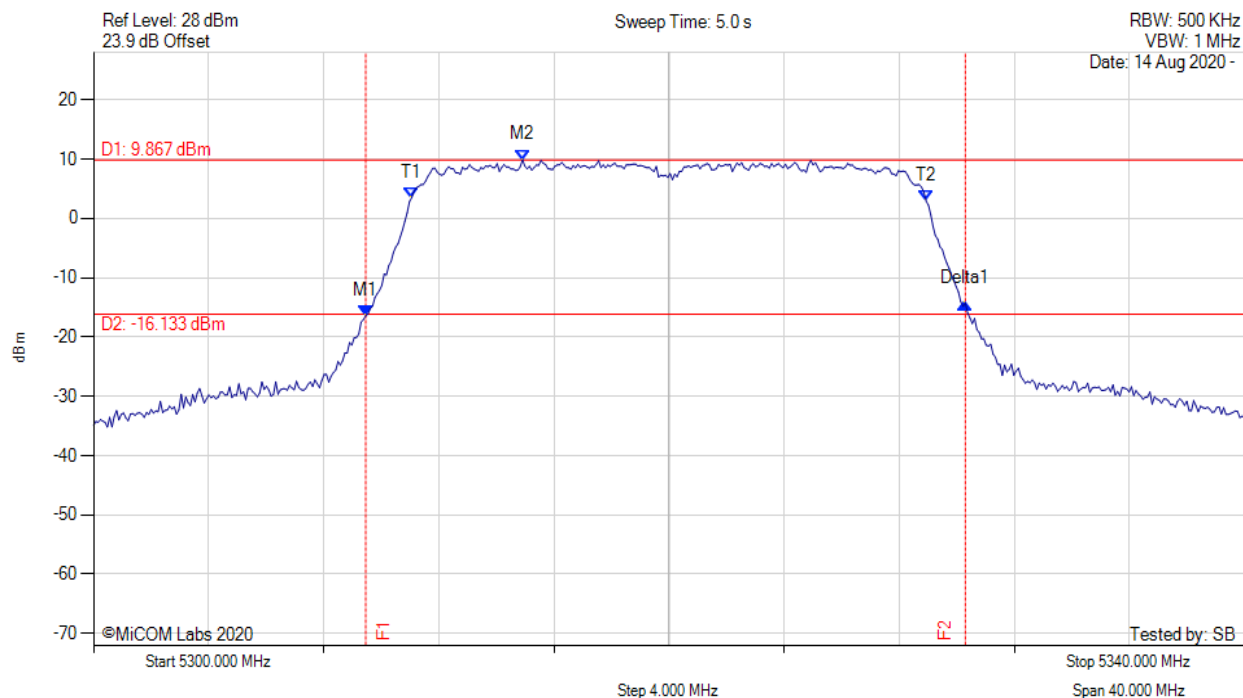


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5309.459 MHz : -16.462 dBm M2 : 5314.910 MHz : 9.867 dBm Delta1 : 20.842 MHz : 2.164 dB T1 : 5311.062 MHz : 3.516 dBm T2 : 5328.938 MHz : 2.904 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.842 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

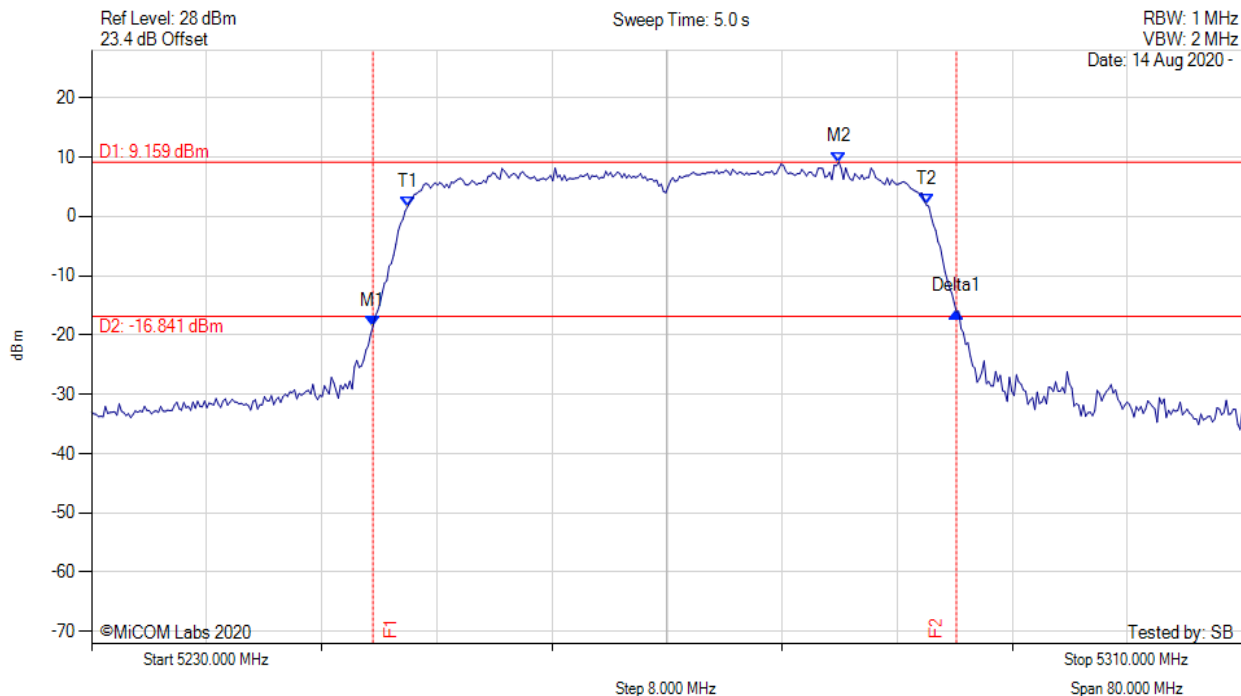

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.559 MHz : -18.561 dBm M2 : 5281.944 MHz : 9.159 dBm Delta1 : 40.561 MHz : 2.473 dB T1 : 5251.964 MHz : 1.628 dBm T2 : 5288.036 MHz : 1.931 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)

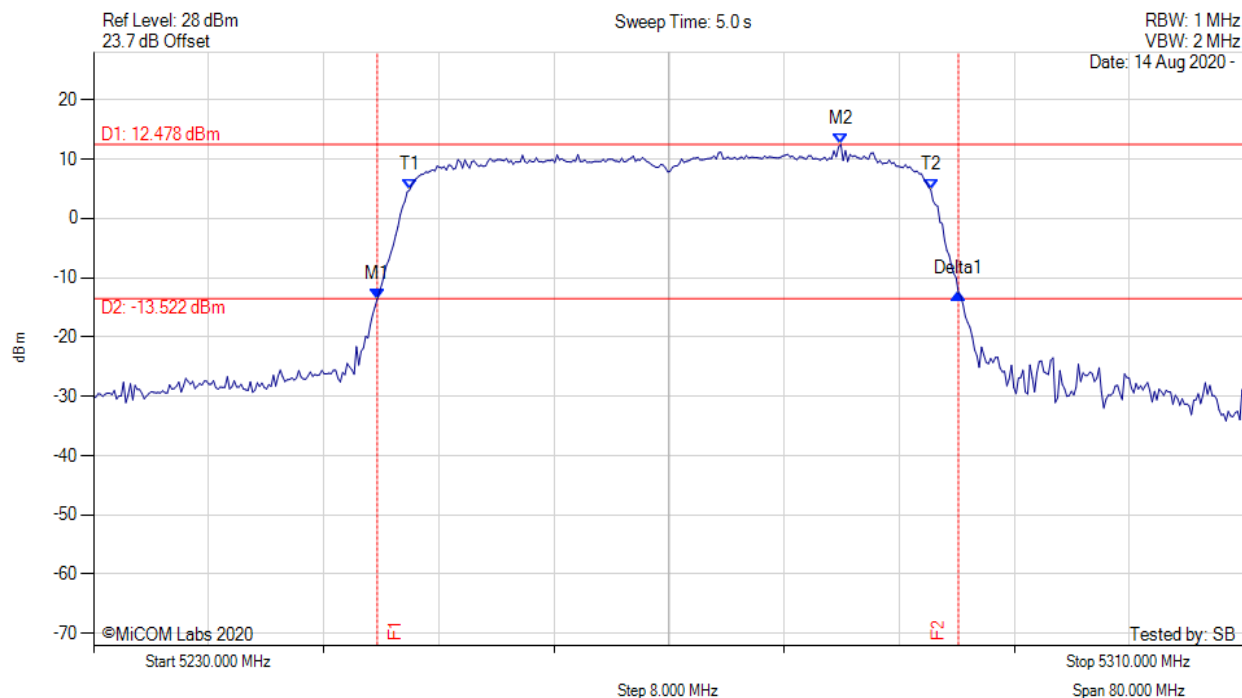


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.719 MHz : -13.639 dBm M2 : 5281.944 MHz : 12.478 dBm Delta1 : 40.401 MHz : 1.021 dB T1 : 5251.964 MHz : 4.773 dBm T2 : 5288.196 MHz : 4.832 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.401 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

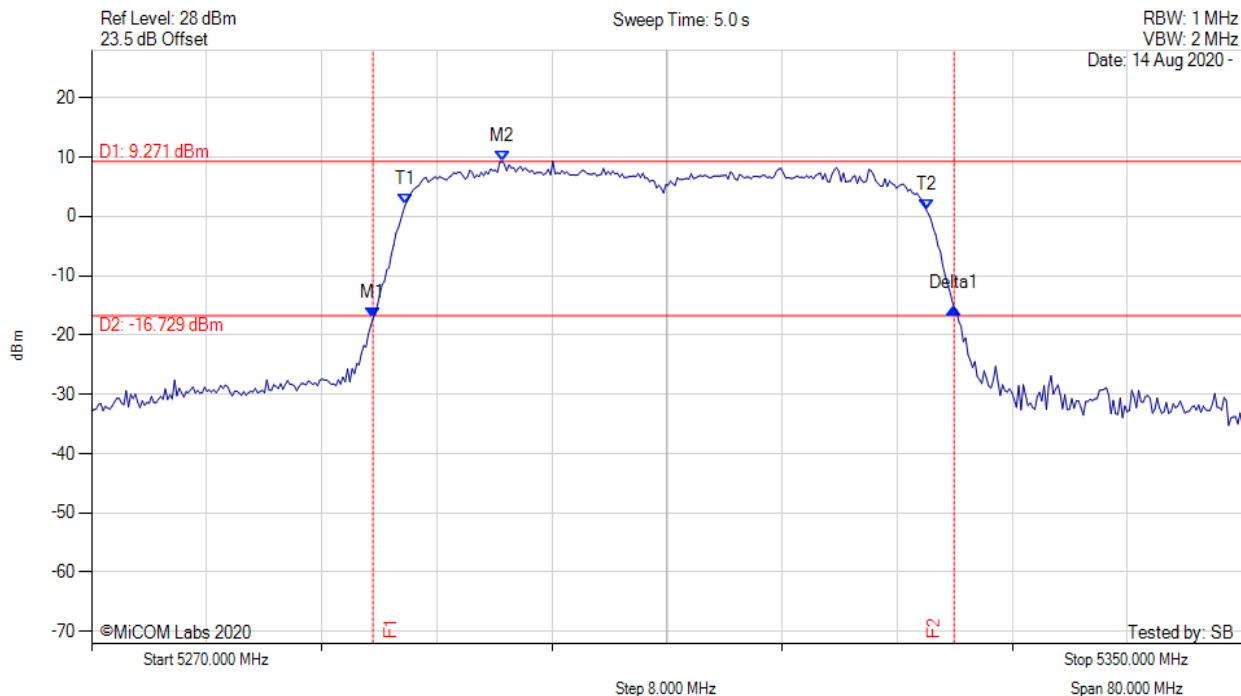


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5289.559 MHz : -17.190 dBm M2 : 5298.537 MHz : 9.271 dBm Delta1 : 40.401 MHz : 1.668 dB T1 : 5291.804 MHz : 1.942 dBm T2 : 5328.036 MHz : 1.026 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.401 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

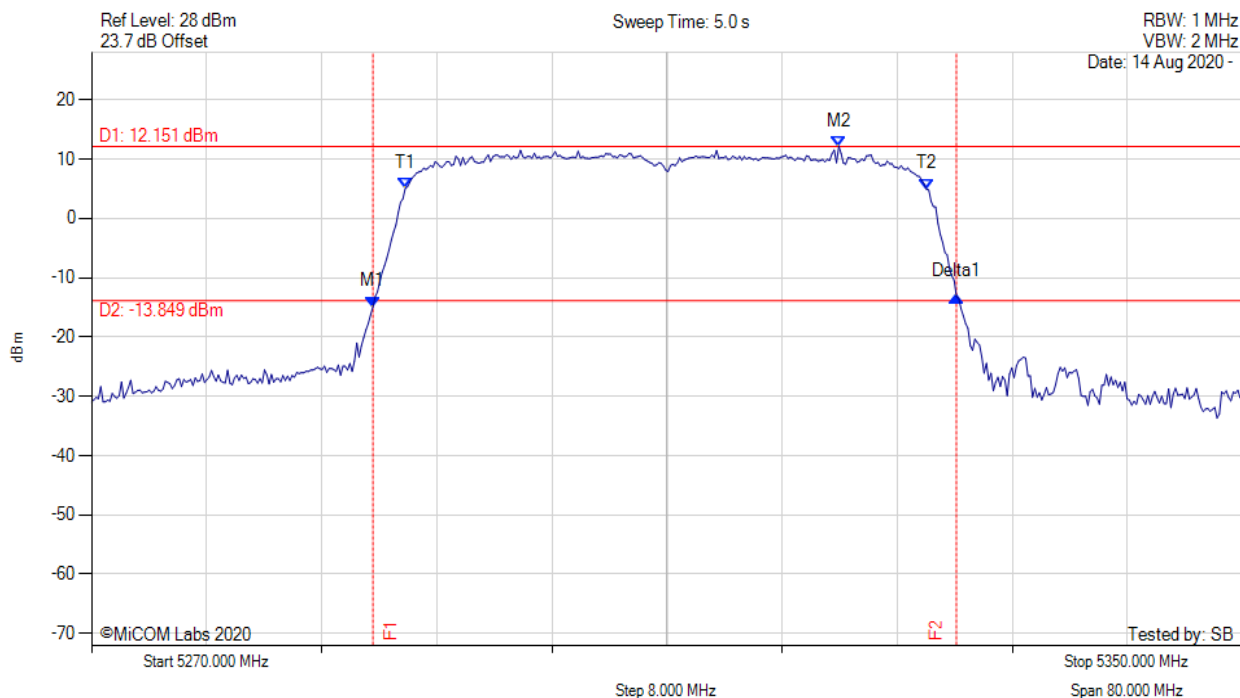


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5289.559 MHz : -14.912 dBm M2 : 5321.944 MHz : 12.151 dBm Delta1 : 40.561 MHz : 1.733 dB T1 : 5291.804 MHz : 5.033 dBm T2 : 5328.036 MHz : 4.941 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

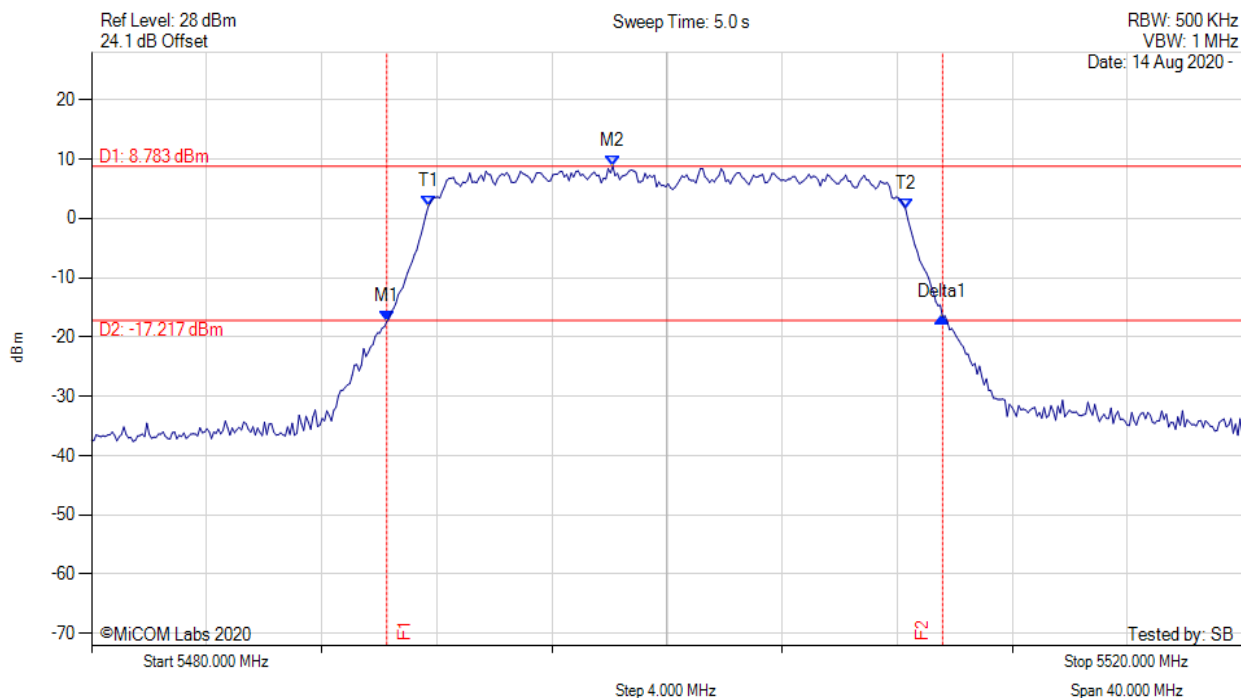

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5490.261 MHz : -17.393 dBm M2 : 5498.116 MHz : 8.783 dBm Delta1 : 19.319 MHz : 0.732 dB T1 : 5491.703 MHz : 2.007 dBm T2 : 5508.297 MHz : 1.504 dBm OBW : 16.593 MHz	Measured 26 dB Bandwidth: 19.319 MHz Measured 99% Bandwidth: 16.593 MHz

[back to matrix](#)

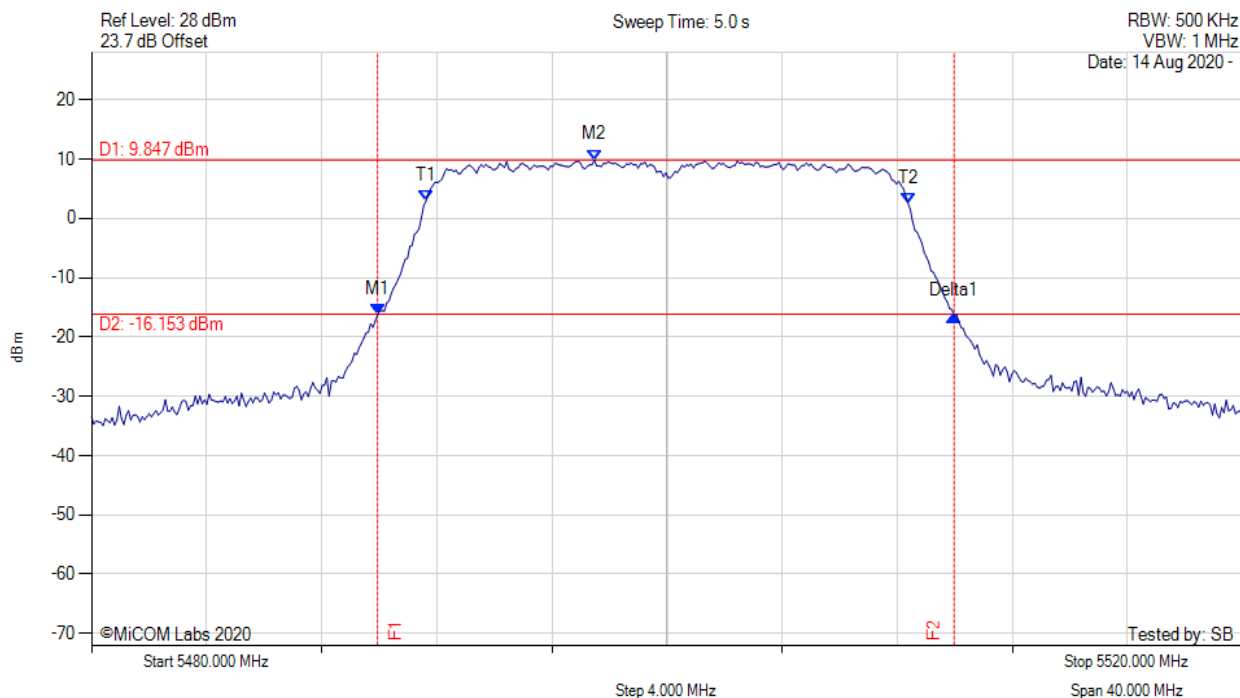


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5489.940 MHz : -16.297 dBm M2 : 5497.475 MHz : 9.847 dBm Delta1 : 20.040 MHz : -0.155 dB T1 : 5491.623 MHz : 2.897 dBm T2 : 5508.377 MHz : 2.582 dBm OBW : 16.754 MHz	Measured 26 dB Bandwidth: 20.040 MHz Measured 99% Bandwidth: 16.754 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

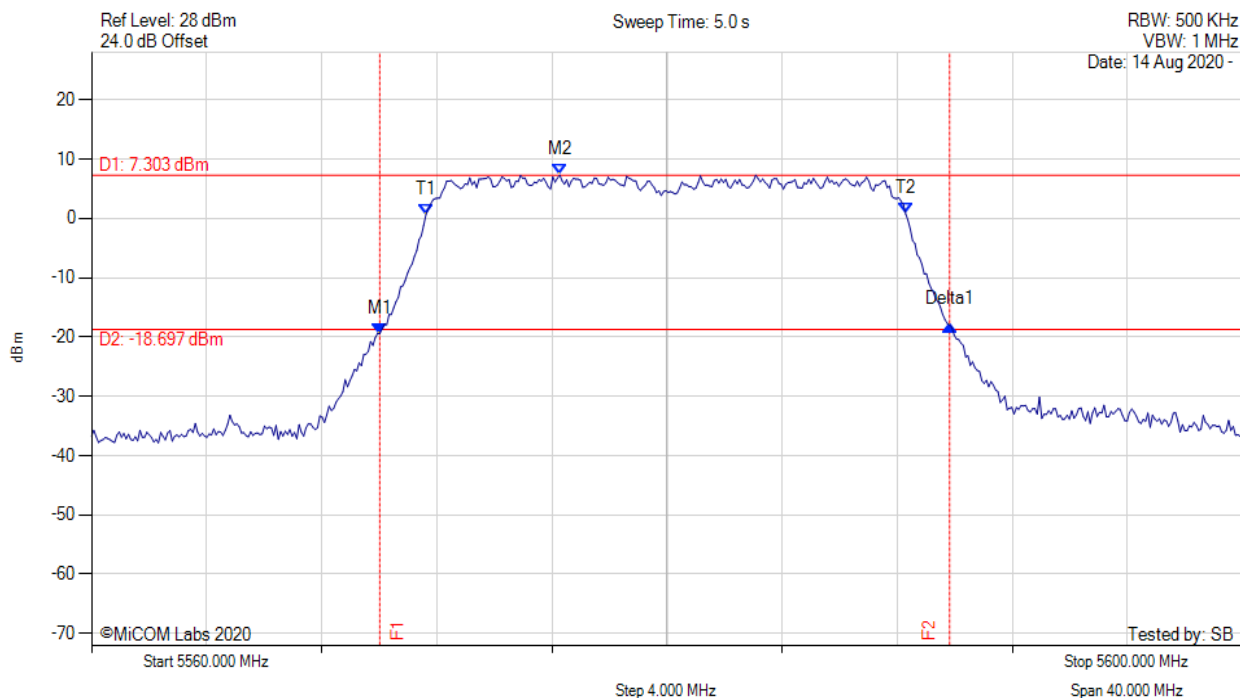


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5570.020 MHz : -19.449 dBm M2 : 5576.273 MHz : 7.303 dBm Delta1 : 19.800 MHz : 1.507 dB T1 : 5571.623 MHz : 0.644 dBm T2 : 5588.297 MHz : 0.768 dBm OBW : 16.673 MHz	Measured 26 dB Bandwidth: 19.800 MHz Measured 99% Bandwidth: 16.673 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

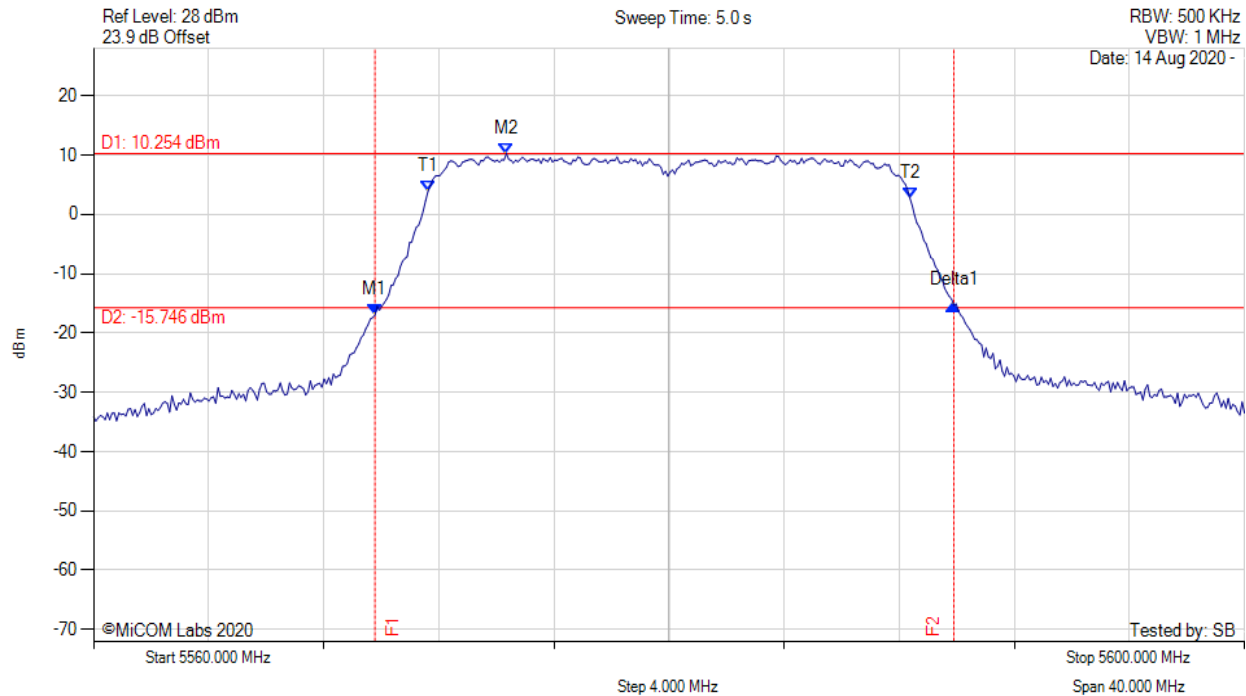

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5569.780 MHz : -16.988 dBm M2 : 5574.349 MHz : 10.254 dBm Delta1 : 20.120 MHz : 1.672 dB T1 : 5571.623 MHz : 3.861 dBm T2 : 5588.377 MHz : 2.714 dBm OBW : 16.754 MHz	Measured 26 dB Bandwidth: 20.120 MHz Measured 99% Bandwidth: 16.754 MHz

[back to matrix](#)

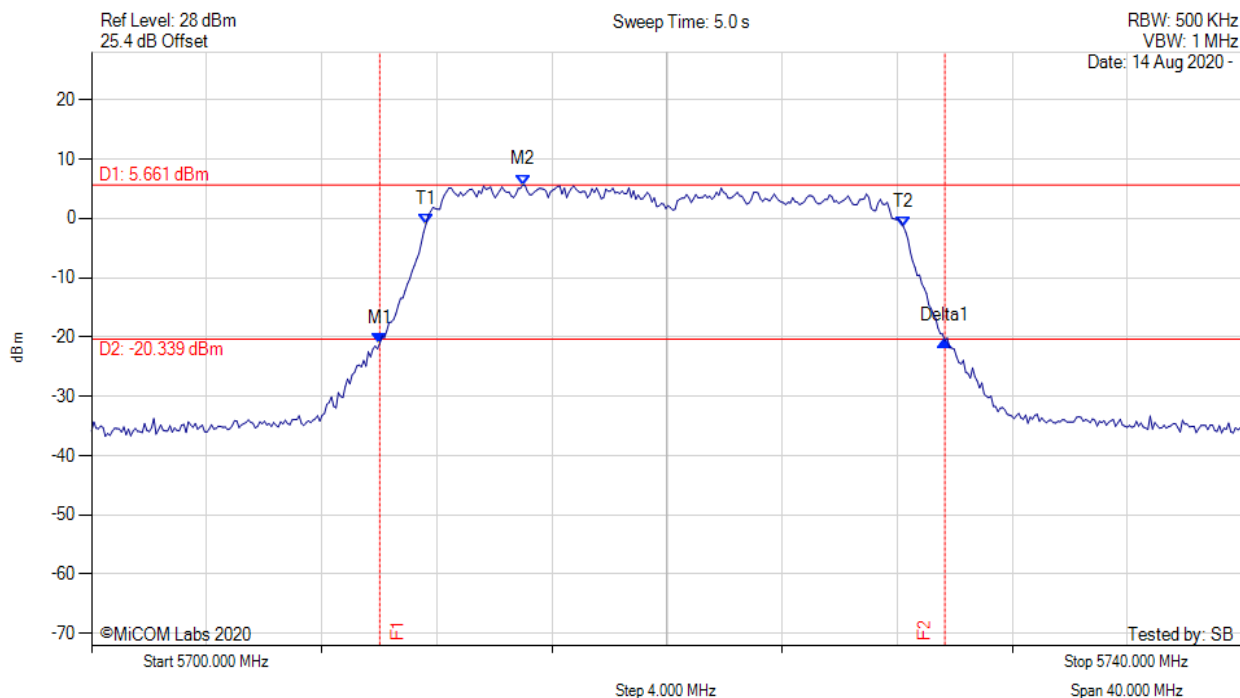


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5710.020 MHz : -21.040 dBm M2 : 5714.990 MHz : 5.661 dBm Delta1 : 19.639 MHz : 0.364 dB T1 : 5711.623 MHz : -0.999 dBm T2 : 5728.216 MHz : -1.420 dBm OBW : 16.593 MHz	Measured 26 dB Bandwidth: 19.639 MHz Measured 99% Bandwidth: 16.593 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

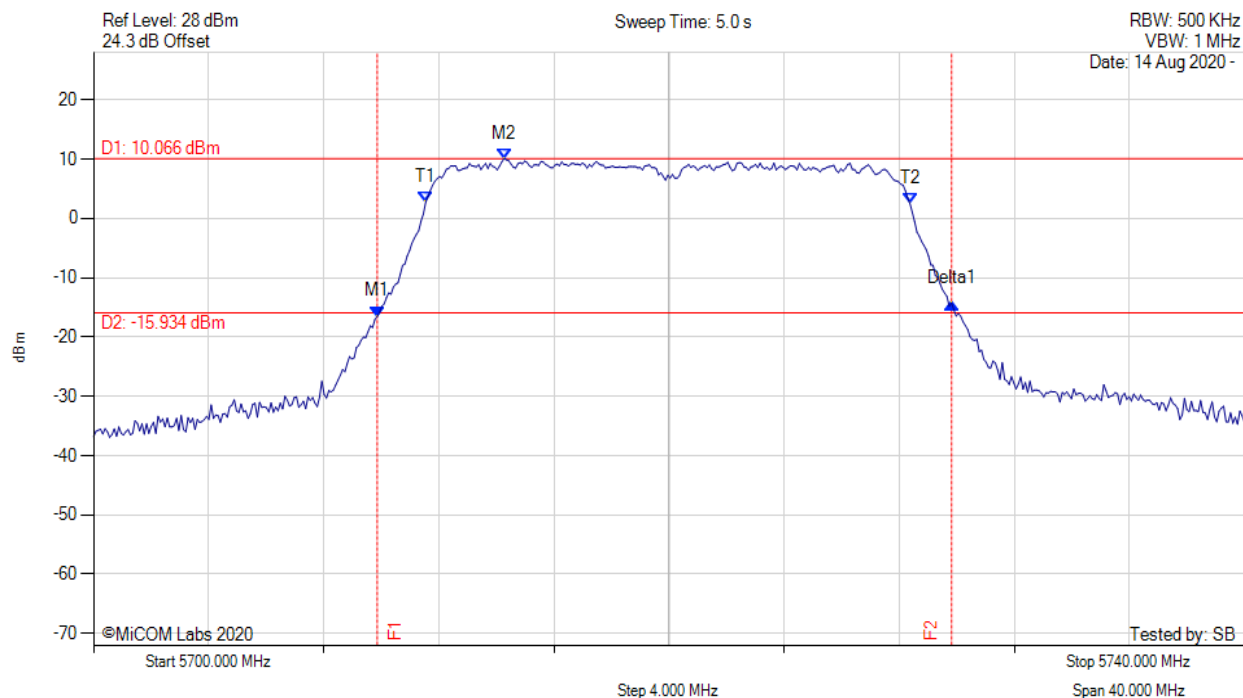


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5709.860 MHz : -16.539 dBm M2 : 5714.269 MHz : 10.066 dBm Delta1 : 19.960 MHz : 2.278 dB T1 : 5711.543 MHz : 2.714 dBm T2 : 5728.377 MHz : 2.511 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 19.960 MHz Measured 99% Bandwidth: 16.834 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

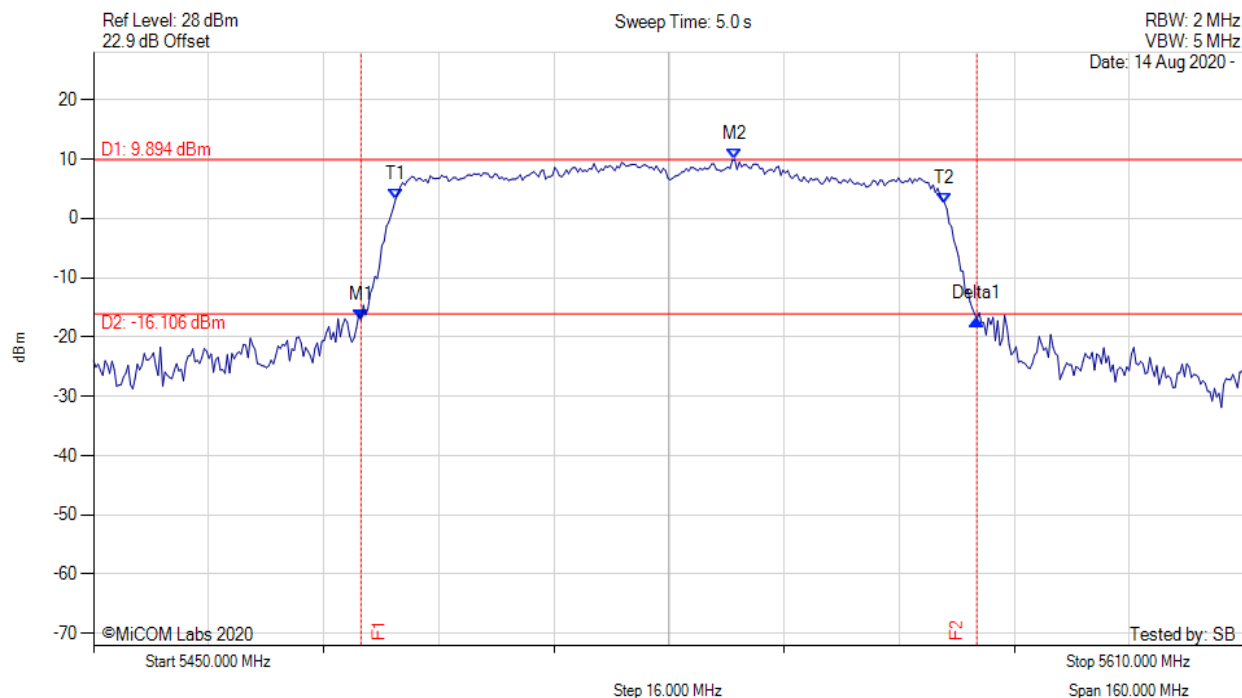


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5487.194 MHz : -17.172 dBm M2 : 5539.138 MHz : 9.894 dBm Delta1 : 85.611 MHz : 0.146 dB T1 : 5492.004 MHz : 3.300 dBm T2 : 5568.317 MHz : 2.586 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 85.611 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

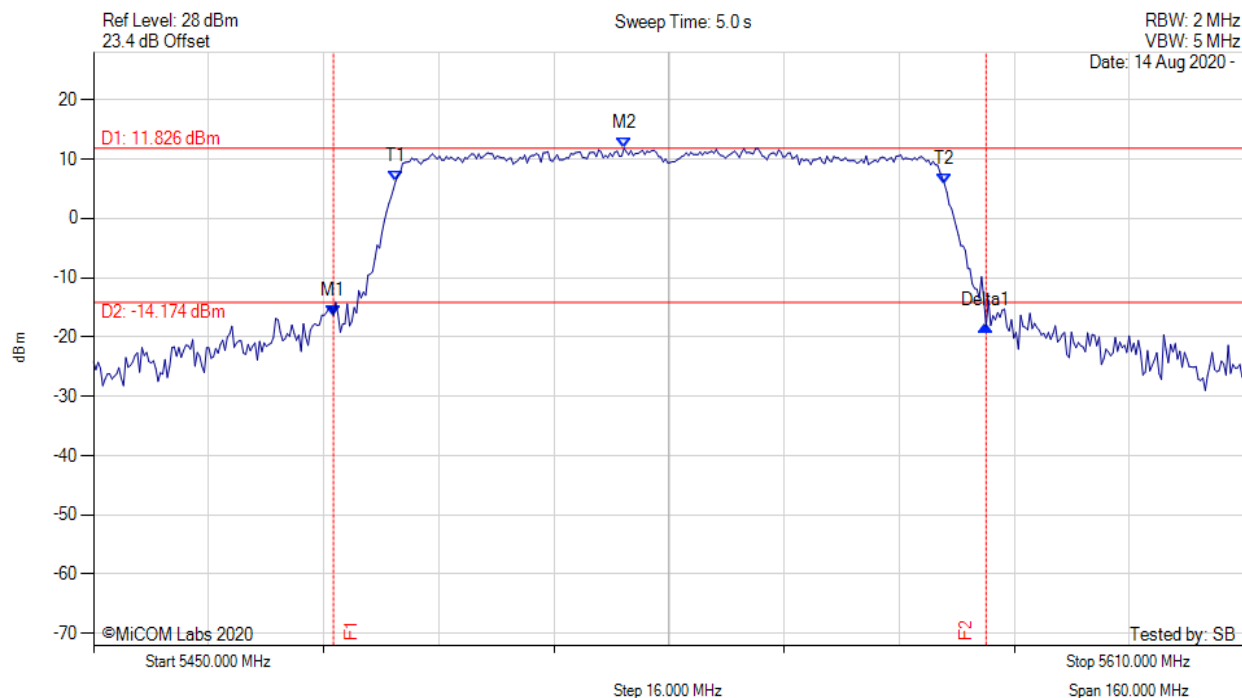


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5483.347 MHz : -16.411 dBm M2 : 5523.747 MHz : 11.826 dBm Delta1 : 90.741 MHz : -1.759 dB T1 : 5492.004 MHz : 6.322 dBm T2 : 5568.317 MHz : 5.710 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 90.741 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

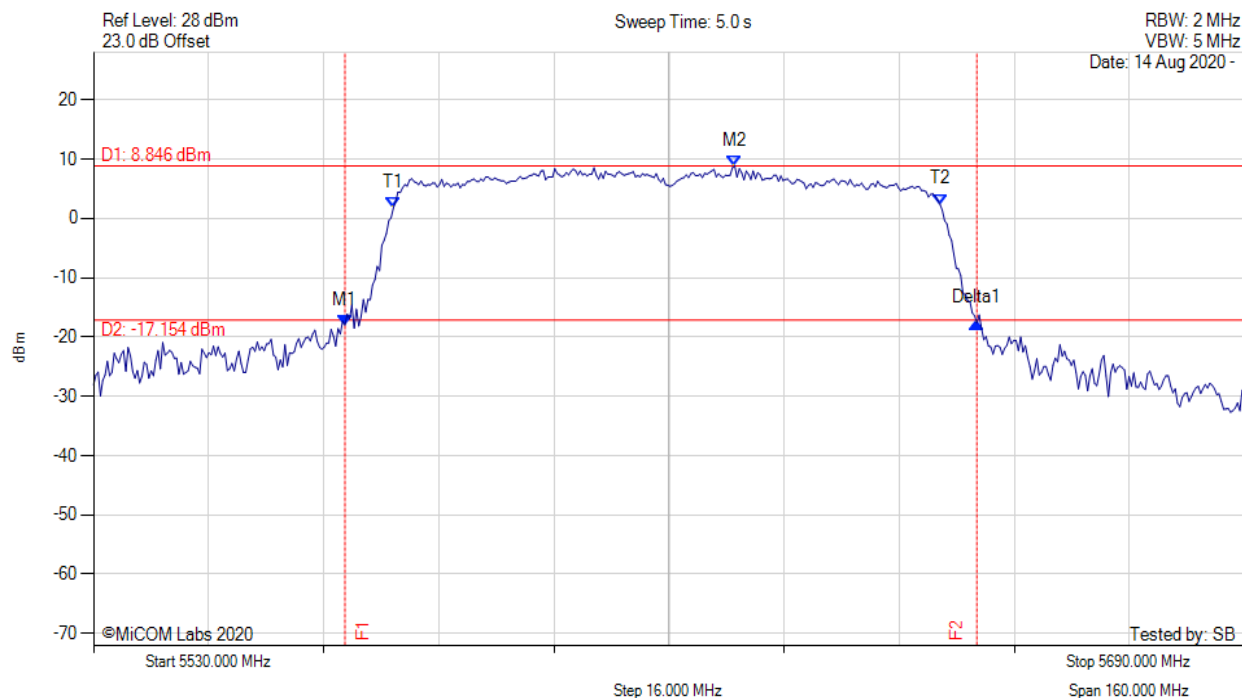

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5564.950 MHz : -17.975 dBm M2 : 5619.138 MHz : 8.846 dBm Delta1 : 87.856 MHz : 0.368 dB T1 : 5571.683 MHz : 1.742 dBm T2 : 5647.675 MHz : 2.389 dBm OBW : 75.992 MHz	Measured 26 dB Bandwidth: 87.856 MHz Measured 99% Bandwidth: 75.992 MHz

[back to matrix](#)

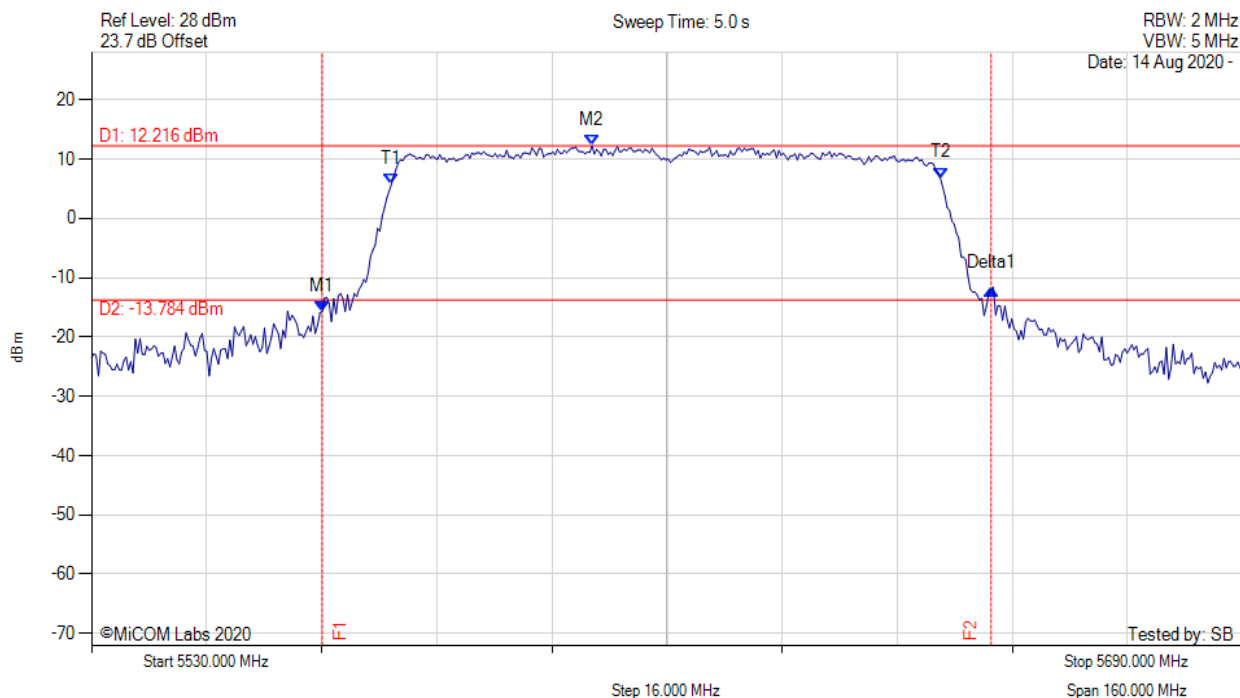


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5562.064 MHz : -15.662 dBm M2 : 5599.579 MHz : 12.216 dBm Delta1 : 92.986 MHz : 3.795 dB T1 : 5571.683 MHz : 5.710 dBm T2 : 5647.996 MHz : 6.827 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 92.986 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

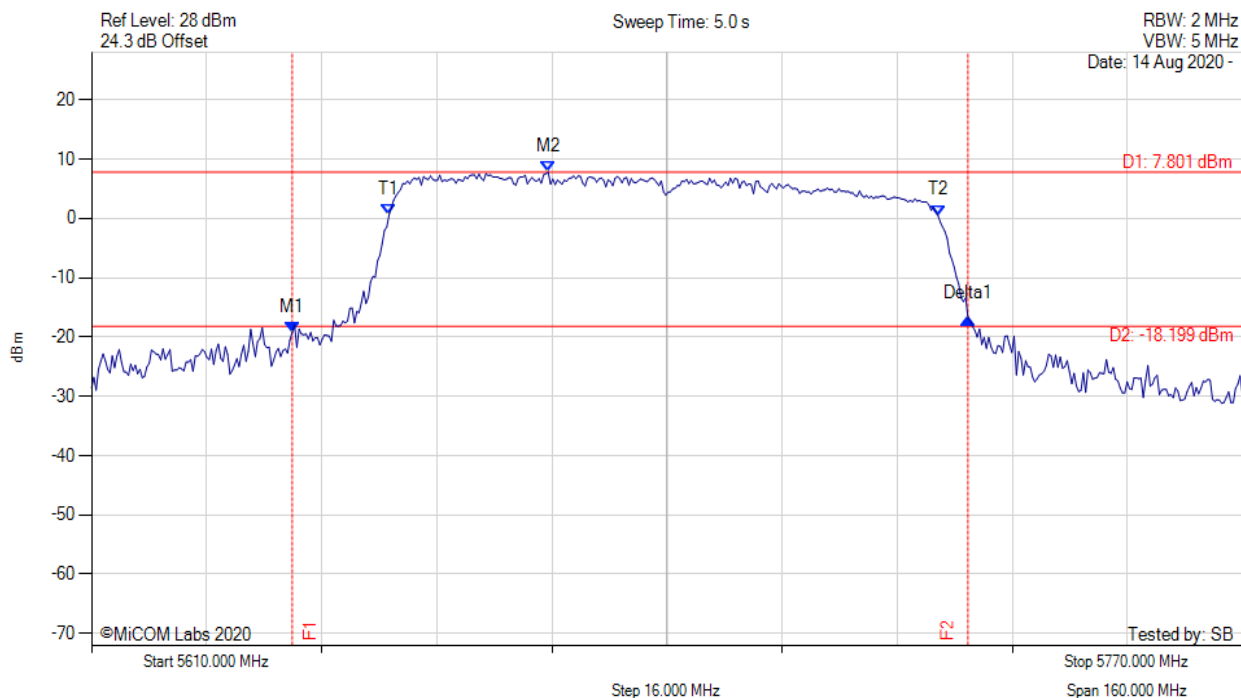

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5637.896 MHz : -19.179 dBm M2 : 5673.487 MHz : 7.801 dBm Delta1 : 93.948 MHz : 2.357 dB T1 : 5651.363 MHz : 0.577 dBm T2 : 5727.675 MHz : 0.510 dBm OBW : 76.313 MHz	Measured 26 dB Bandwidth: 93.948 MHz Measured 99% Bandwidth: 76.313 MHz

[back to matrix](#)

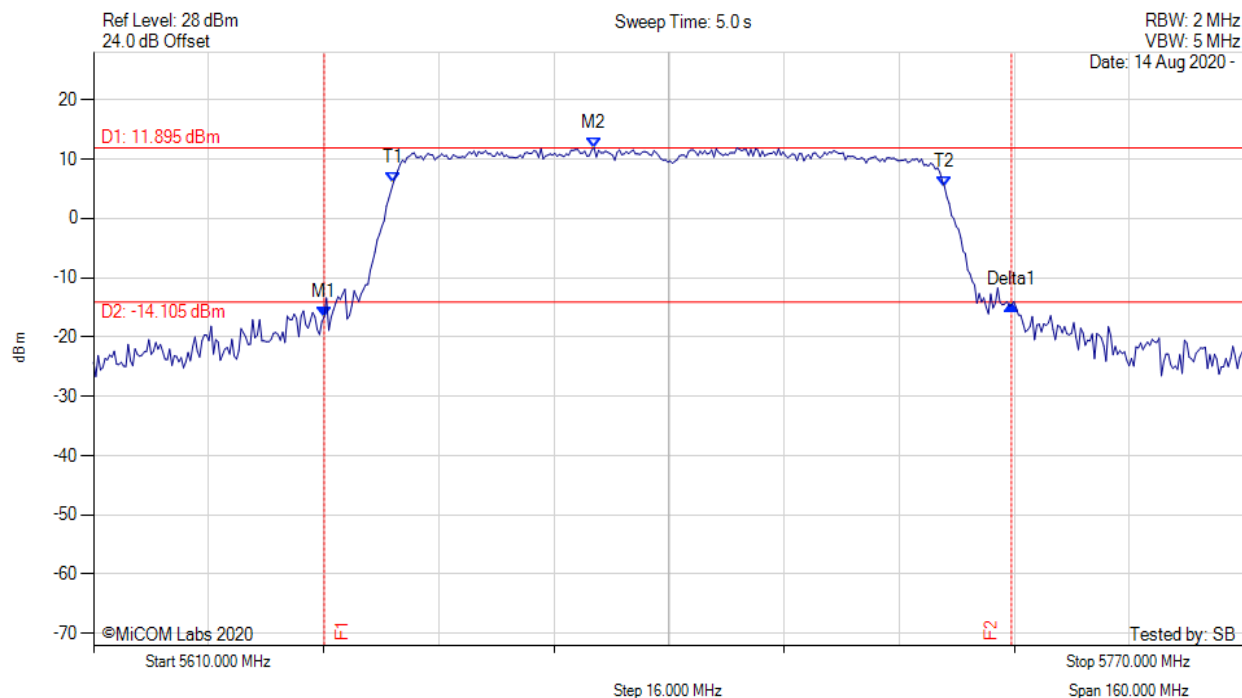


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5642.064 MHz : -16.612 dBm M2 : 5679.579 MHz : 11.895 dBm Delta1 : 95.551 MHz : 1.981 dB T1 : 5651.683 MHz : 6.007 dBm T2 : 5728.317 MHz : 5.299 dBm OBW : 76.633 MHz	Measured 26 dB Bandwidth: 95.551 MHz Measured 99% Bandwidth: 76.633 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

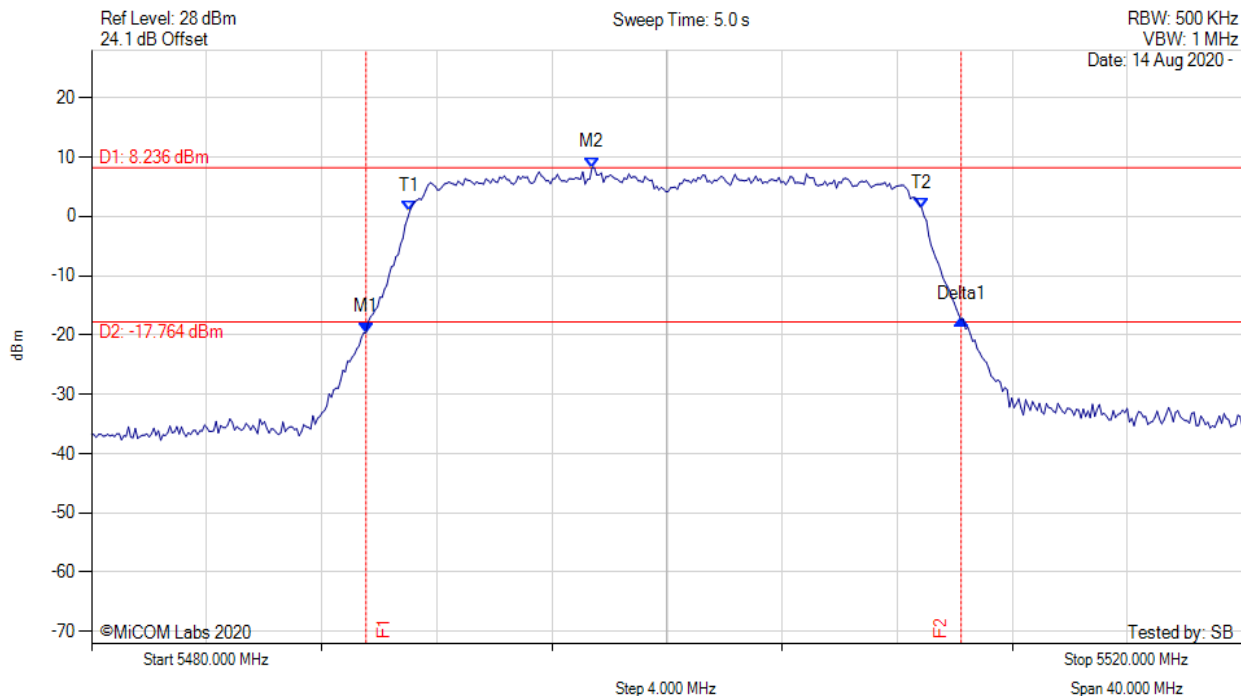


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5489.539 MHz : -19.594 dBm M2 : 5497.395 MHz : 8.236 dBm Delta1 : 20.681 MHz : 2.162 dB T1 : 5491.062 MHz : 0.911 dBm T2 : 5508.858 MHz : 1.348 dBm OBW : 17.796 MHz	Measured 26 dB Bandwidth: 20.681 MHz Measured 99% Bandwidth: 17.796 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

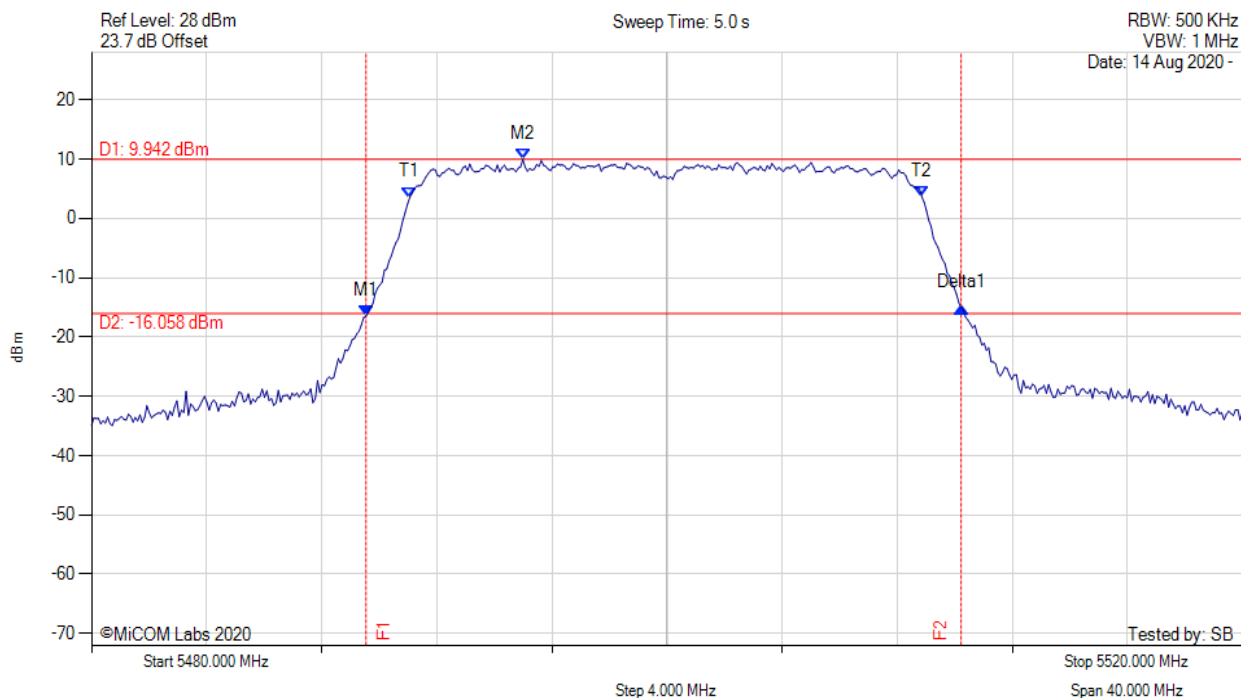

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5489.539 MHz : -16.484 dBm M2 : 5494.990 MHz : 9.942 dBm Delta1 : 20.681 MHz : 1.430 dB T1 : 5491.062 MHz : 3.540 dBm T2 : 5508.858 MHz : 3.617 dBm OBW : 17.796 MHz	Measured 26 dB Bandwidth: 20.681 MHz Measured 99% Bandwidth: 17.796 MHz

[back to matrix](#)

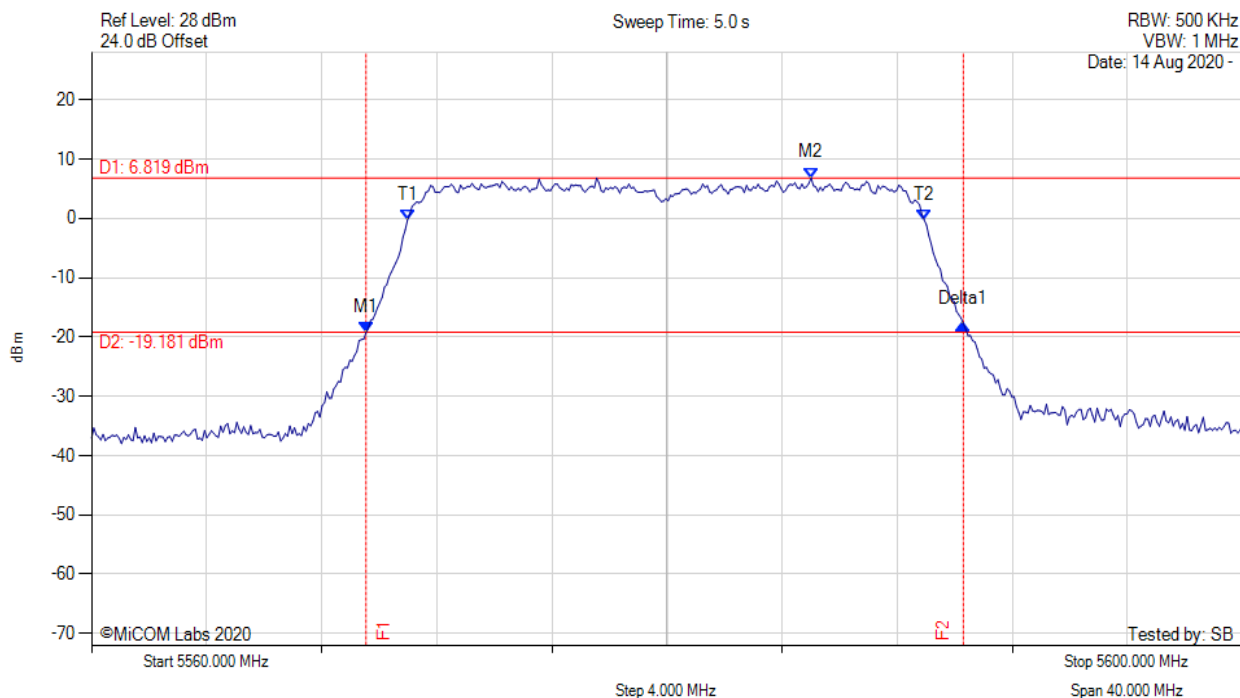


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5569.539 MHz : -19.287 dBm M2 : 5585.010 MHz : 6.819 dBm Delta1 : 20.762 MHz : 1.544 dB T1 : 5570.982 MHz : -0.222 dBm T2 : 5588.938 MHz : -0.257 dBm OBW : 17.956 MHz	Measured 26 dB Bandwidth: 20.762 MHz Measured 99% Bandwidth: 17.956 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

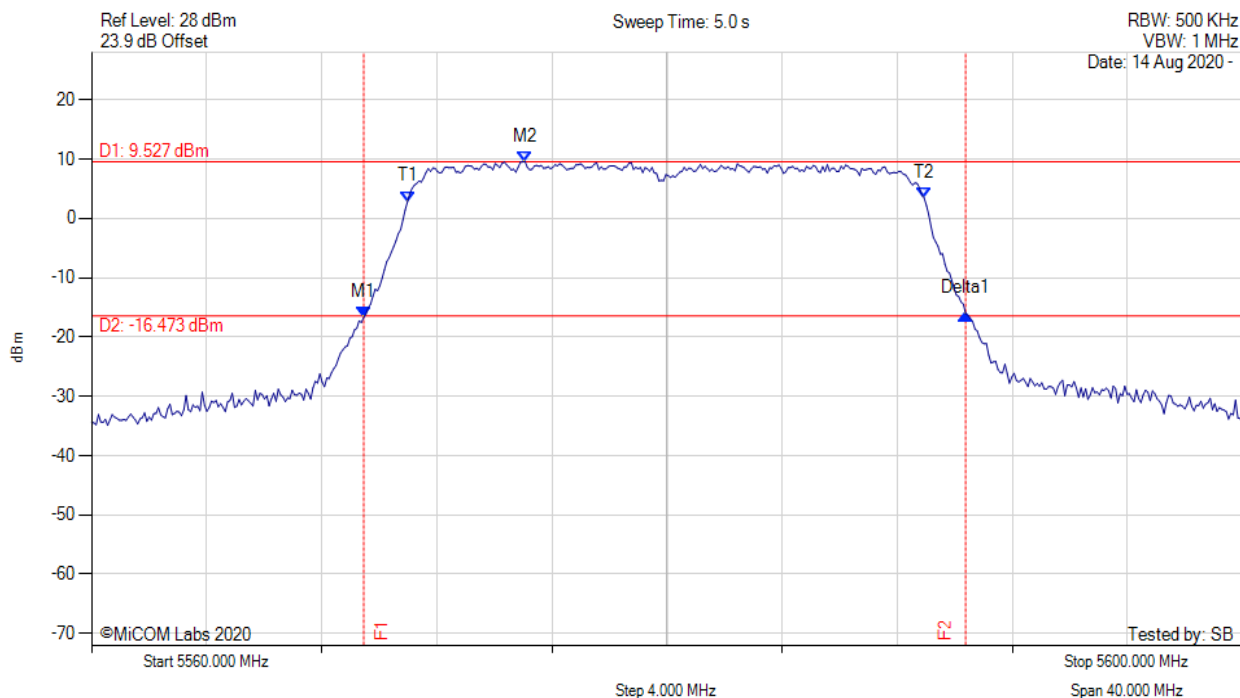


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5569.459 MHz : -16.736 dBm M2 : 5575.070 MHz : 9.527 dBm Delta1 : 20.922 MHz : 0.655 dB T1 : 5570.982 MHz : 2.849 dBm T2 : 5588.938 MHz : 3.426 dBm OBW : 17.956 MHz	Measured 26 dB Bandwidth: 20.922 MHz Measured 99% Bandwidth: 17.956 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

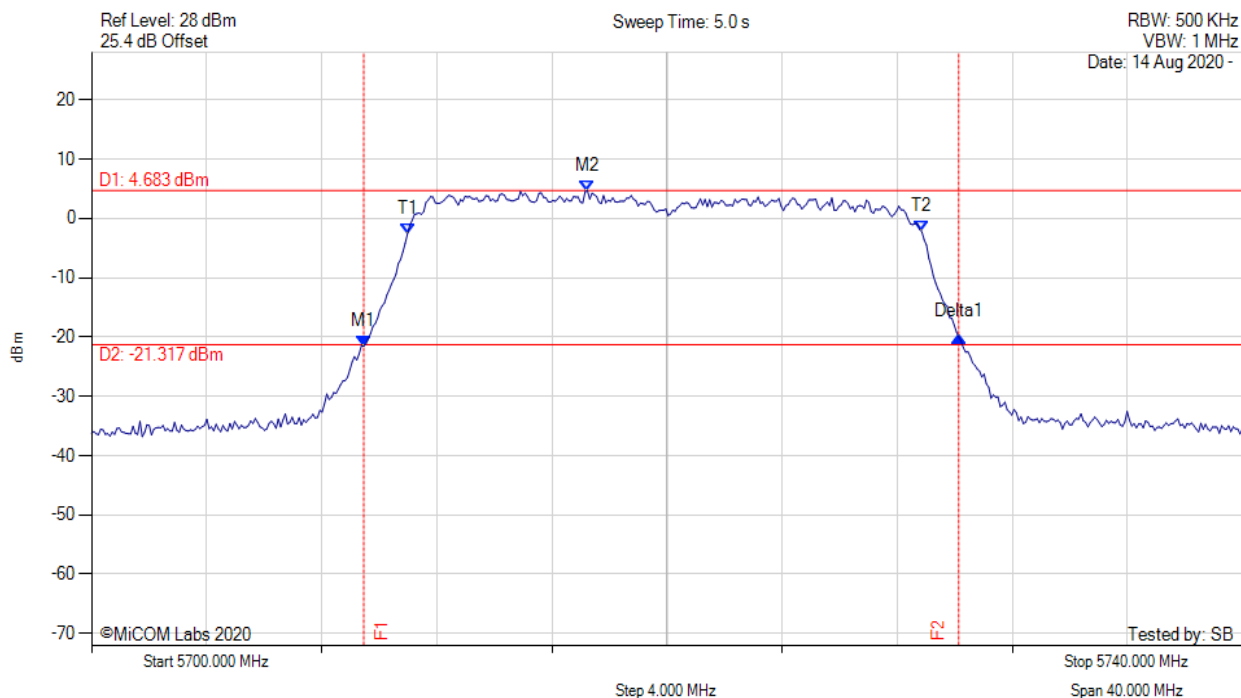


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5709.459 MHz : -21.554 dBm M2 : 5717.234 MHz : 4.683 dBm Delta1 : 20.681 MHz : 1.576 dB T1 : 5710.982 MHz : -2.571 dBm T2 : 5728.858 MHz : -2.258 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 20.681 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

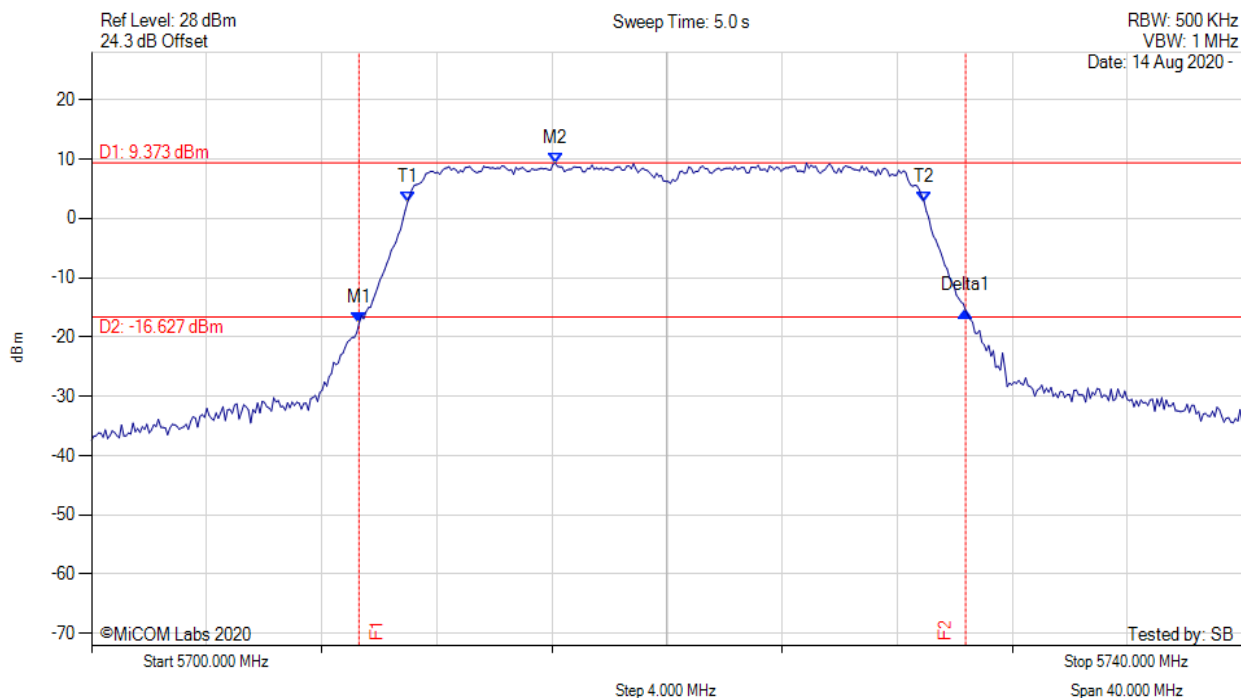


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5709.299 MHz : -17.690 dBm M2 : 5716.112 MHz : 9.373 dBm Delta1 : 21.082 MHz : 2.087 dB T1 : 5710.982 MHz : 2.721 dBm T2 : 5728.938 MHz : 2.743 dBm OBW : 17.956 MHz	Measured 26 dB Bandwidth: 21.082 MHz Measured 99% Bandwidth: 17.956 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

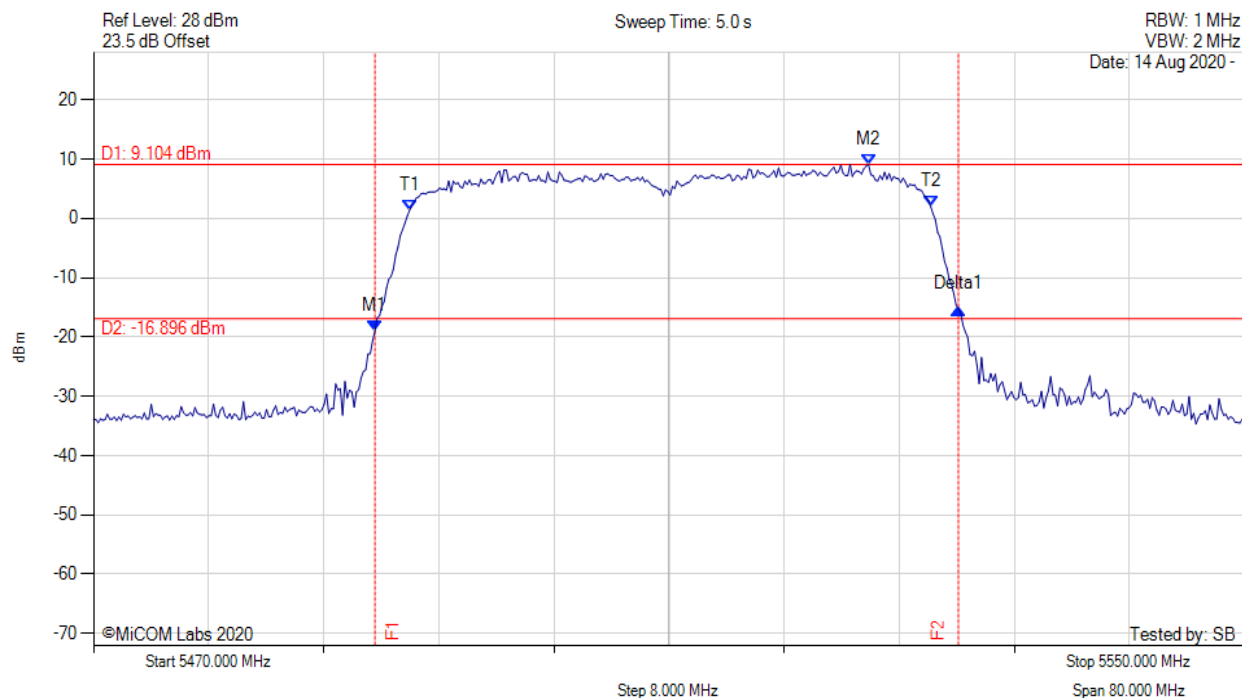


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5489.559 MHz : -18.949 dBm M2 : 5523.868 MHz : 9.104 dBm Delta1 : 40.561 MHz : 3.764 dB T1 : 5491.964 MHz : 1.356 dBm T2 : 5528.196 MHz : 1.976 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

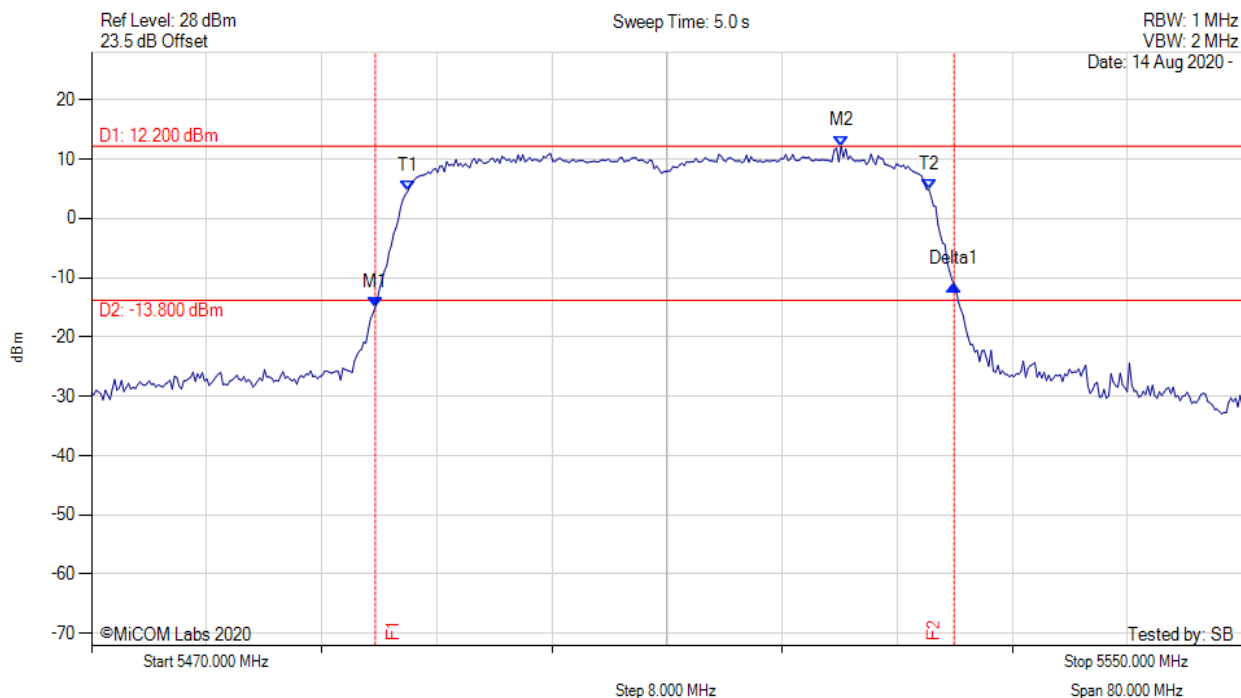


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5489.719 MHz : -15.069 dBm M2 : 5522.104 MHz : 12.200 dBm Delta1 : 40.240 MHz : 3.891 dB T1 : 5491.964 MHz : 4.508 dBm T2 : 5528.196 MHz : 4.905 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.240 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

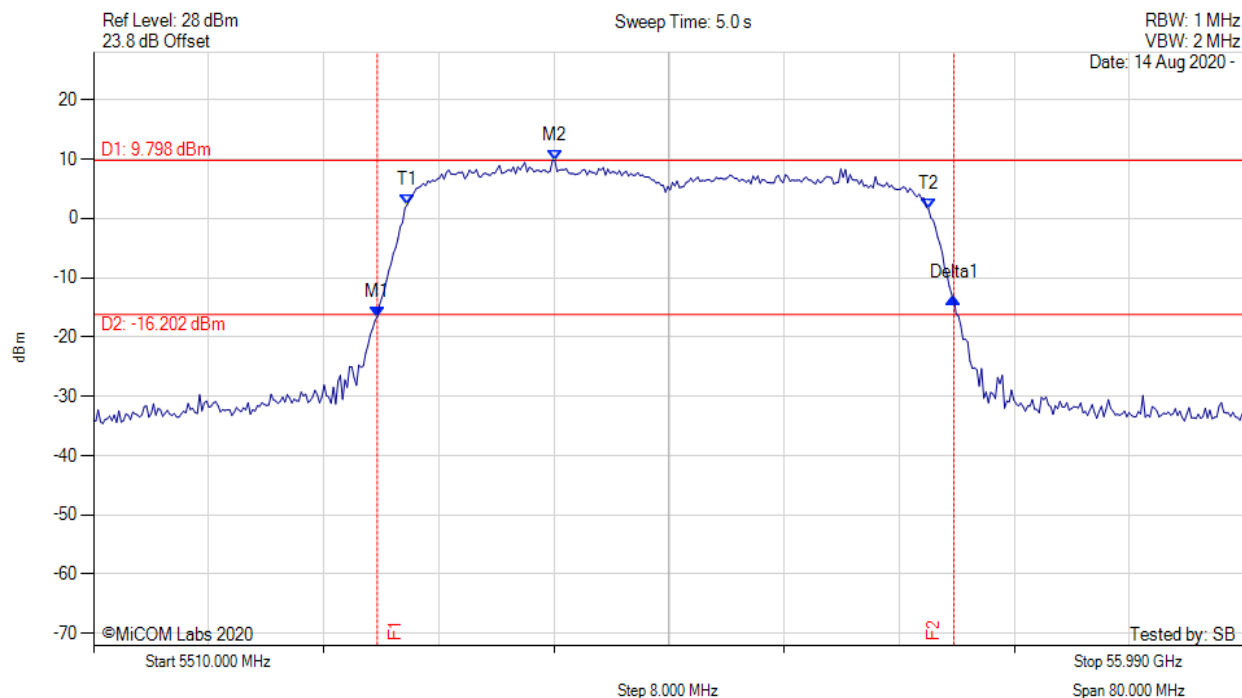


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5529.719 MHz : -16.588 dBm M2 : 5542.064 MHz : 9.798 dBm Delta1 : 40.080 MHz : 3.112 dB T1 : 5531.804 MHz : 2.275 dBm T2 : 5568.036 MHz : 1.635 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.080 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

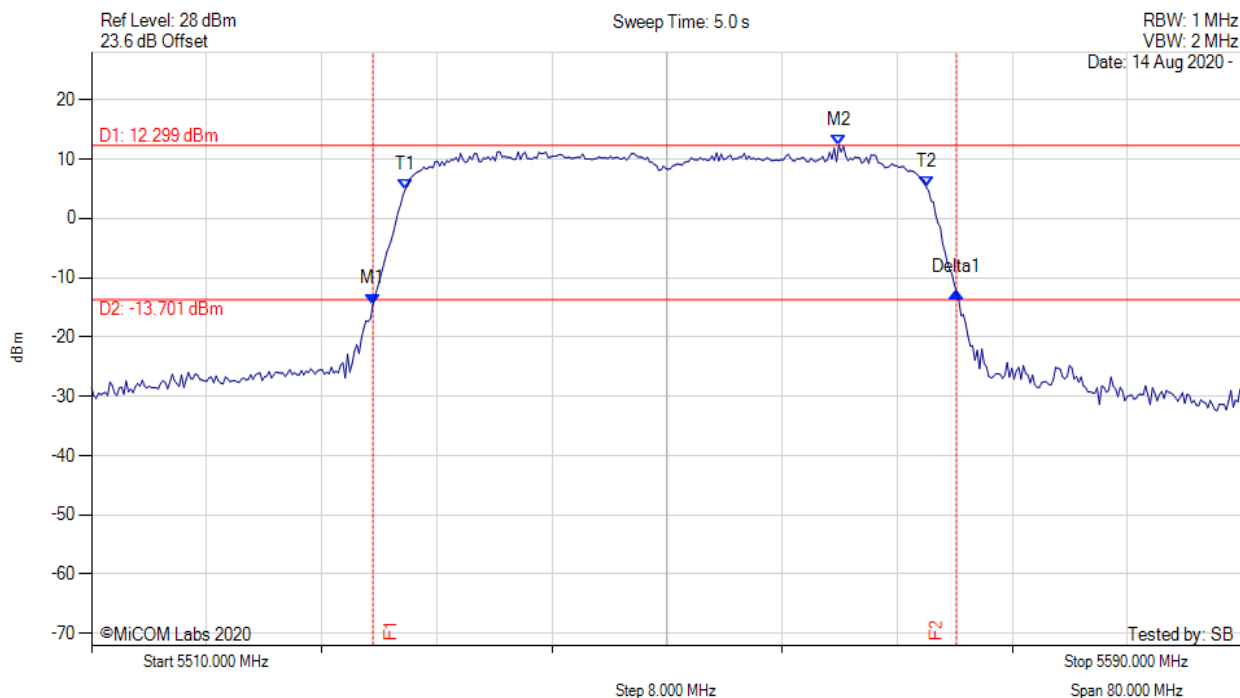


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5529.559 MHz : -14.450 dBm M2 : 5561.944 MHz : 12.299 dBm Delta1 : 40.561 MHz : 2.087 dB T1 : 5531.804 MHz : 4.862 dBm T2 : 5568.036 MHz : 5.224 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.232 MHz

[back to matrix](#)

26 dB & 99% BANDWIDTH




Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

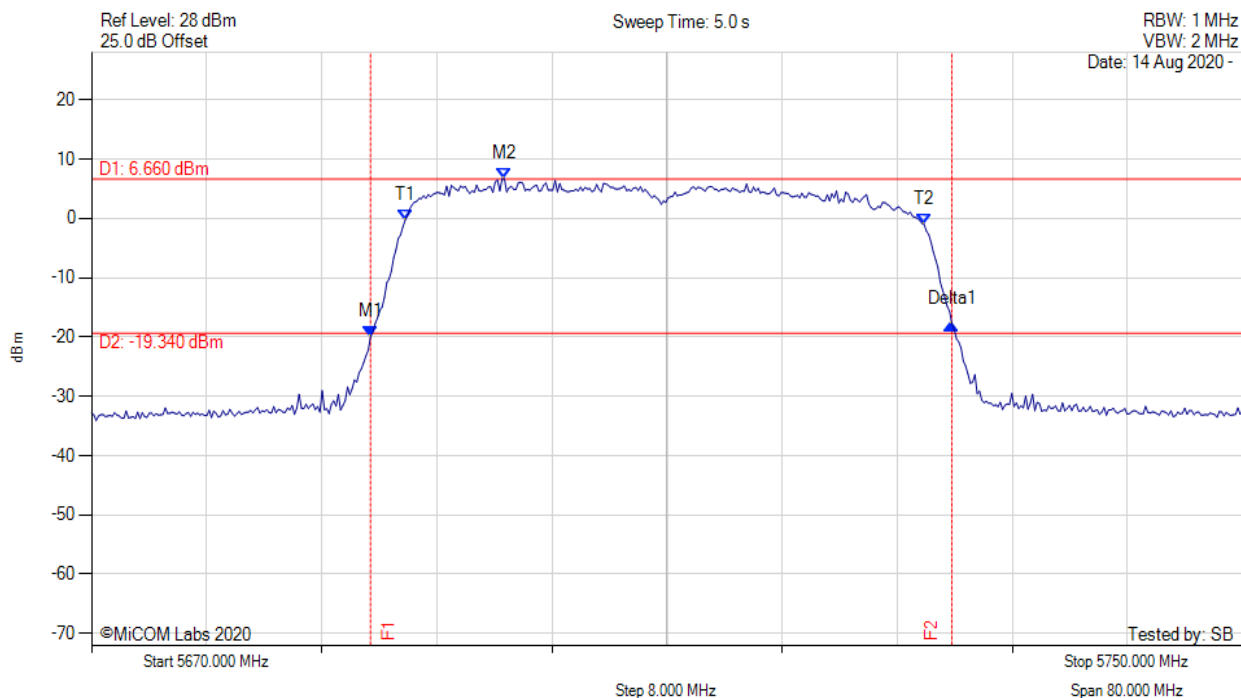

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5689.399 MHz : -19.915 dBm M2 : 5698.697 MHz : 6.660 dBm Delta1 : 40.401 MHz : 2.168 dB T1 : 5691.804 MHz : -0.287 dBm T2 : 5727.876 MHz : -1.064 dBm OBW : 36.072 MHz	Measured 26 dB Bandwidth: 40.401 MHz Measured 99% Bandwidth: 36.072 MHz

[back to matrix](#)

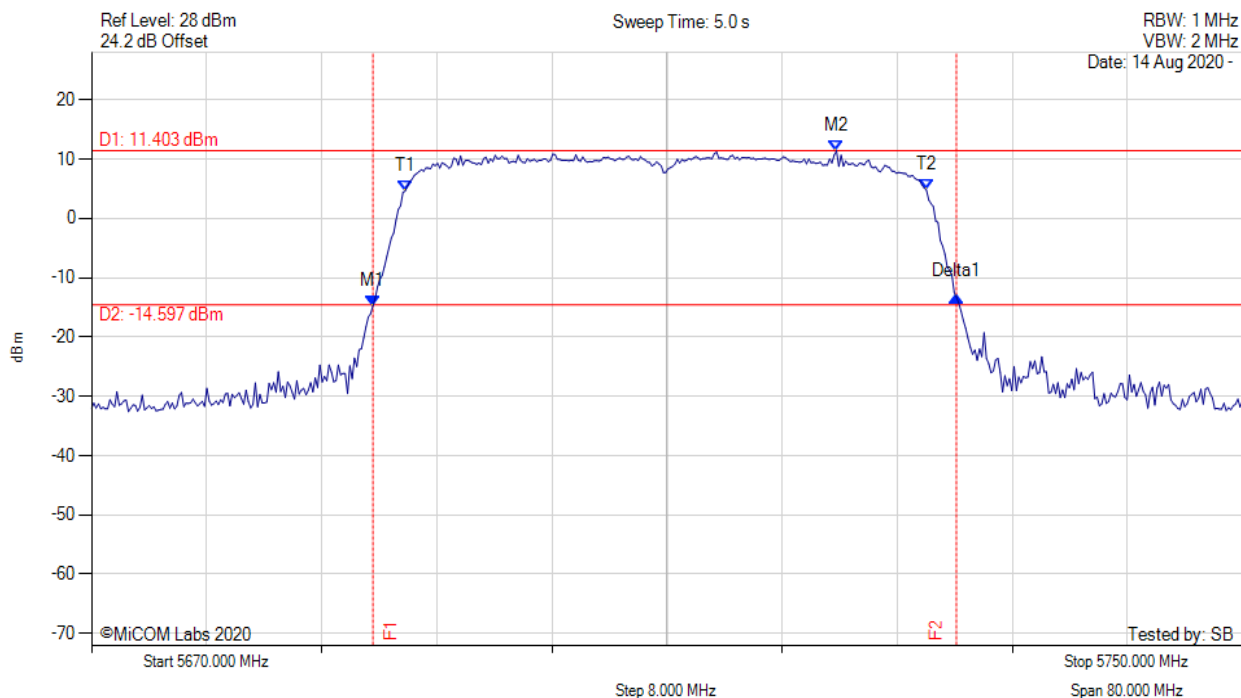

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5689.559 MHz : -14.717 dBm M2 : 5721.784 MHz : 11.403 dBm Delta1 : 40.561 MHz : 1.474 dB T1 : 5691.804 MHz : 4.610 dBm T2 : 5728.036 MHz : 4.789 dBm OBW : 36.232 MHz	Measured 26 dB Bandwidth: 40.561 MHz Measured 99% Bandwidth: 36.232 MHz


[back to matrix](#)

A.2. Power Spectral Density



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

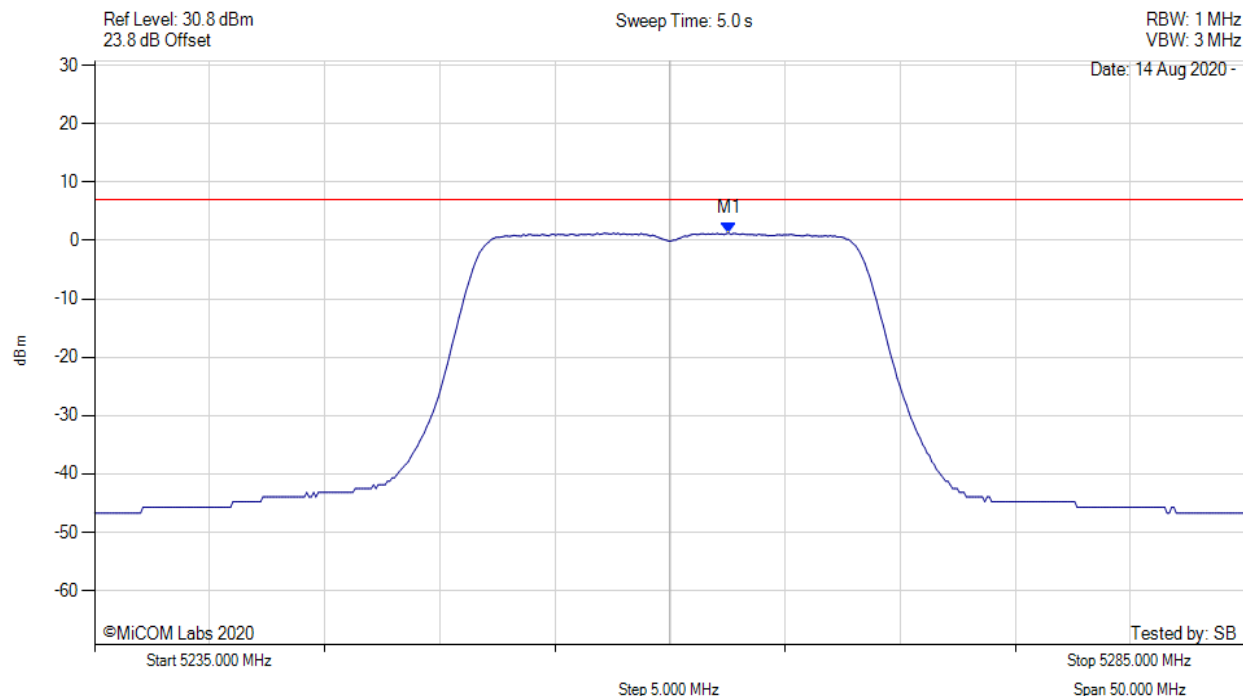


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.555 MHz : 1.273 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

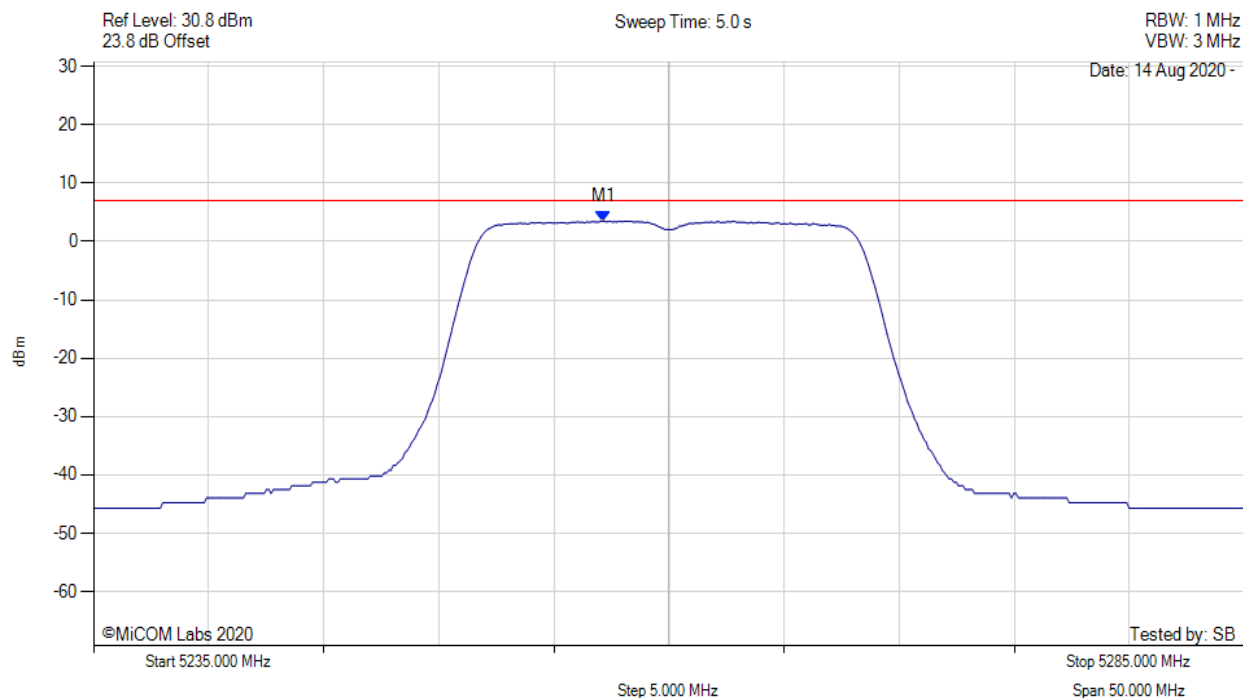


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5257.144 MHz : 3.494 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

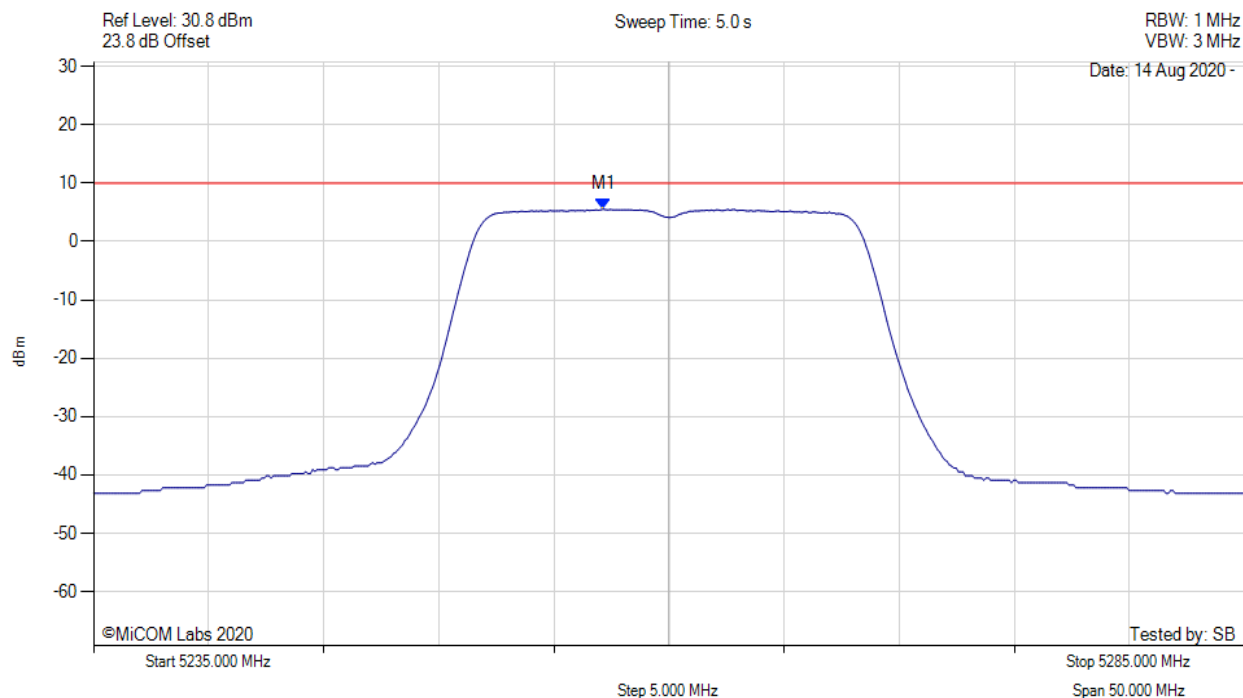


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5257.100 MHz : 5.523 dBm M1 + DCCF : 5257.100 MHz : 5.567 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -4.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

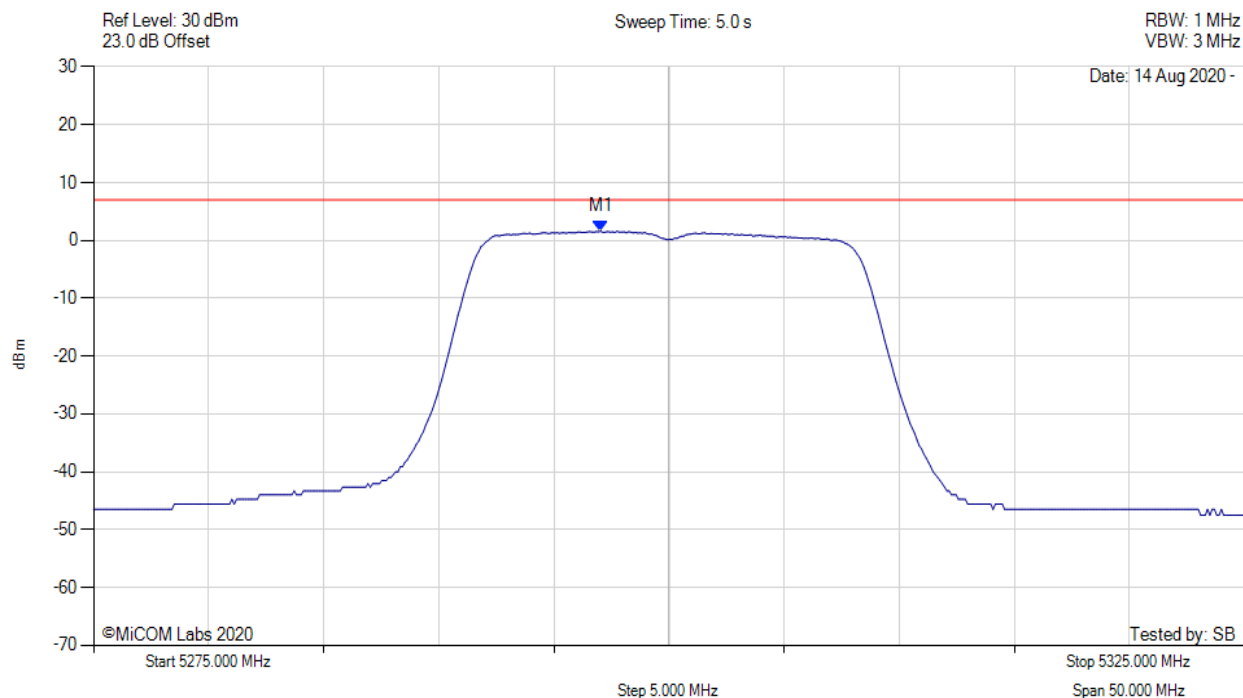


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.044 MHz : 1.590 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

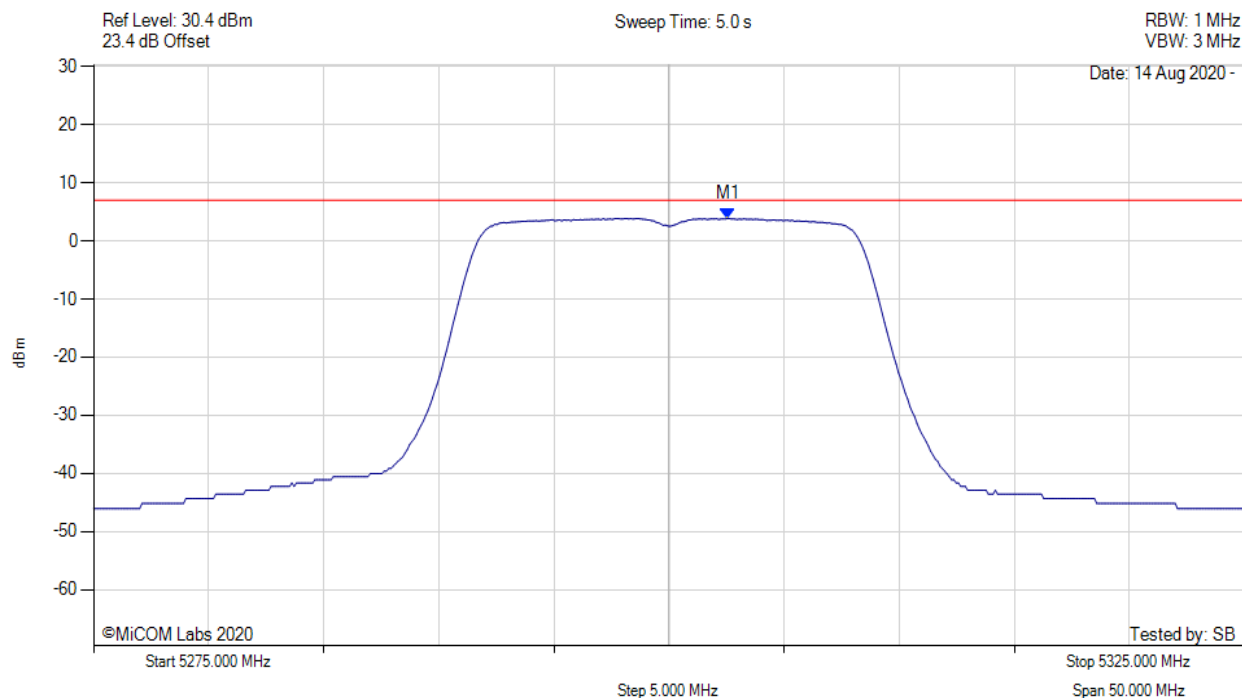


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5302.555 MHz : 3.886 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

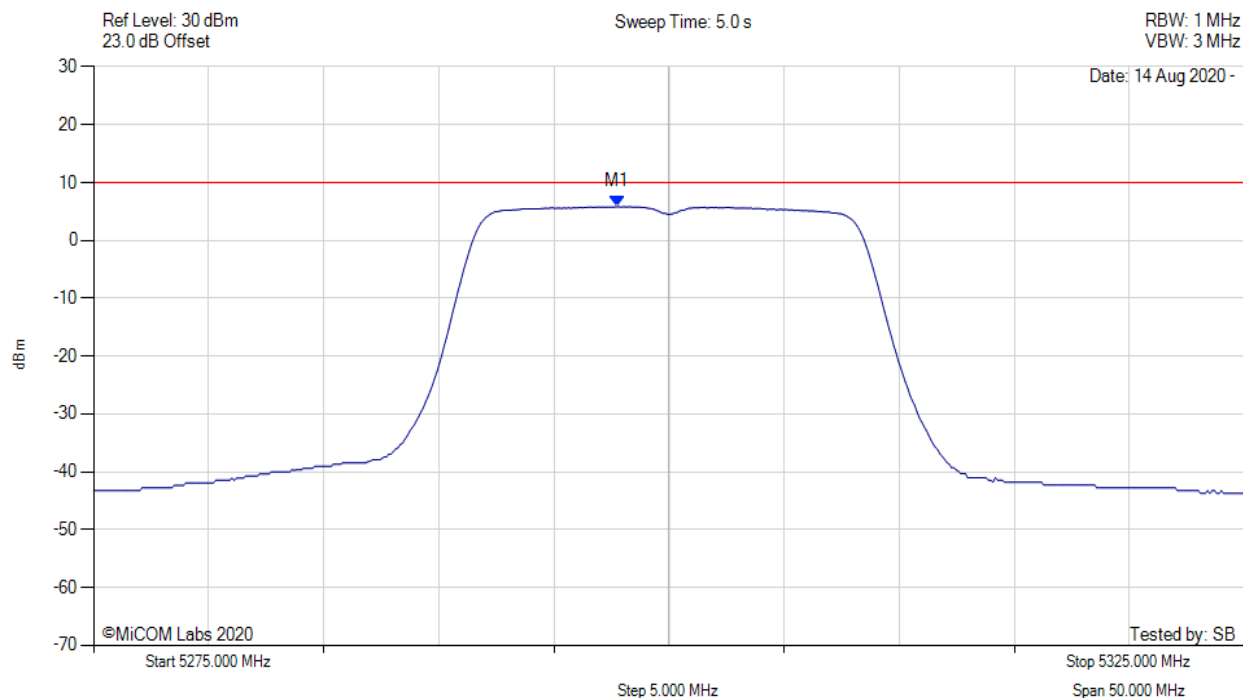


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.700 MHz : 5.854 dBm M1 + DCCF : 5297.700 MHz : 5.898 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -4.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

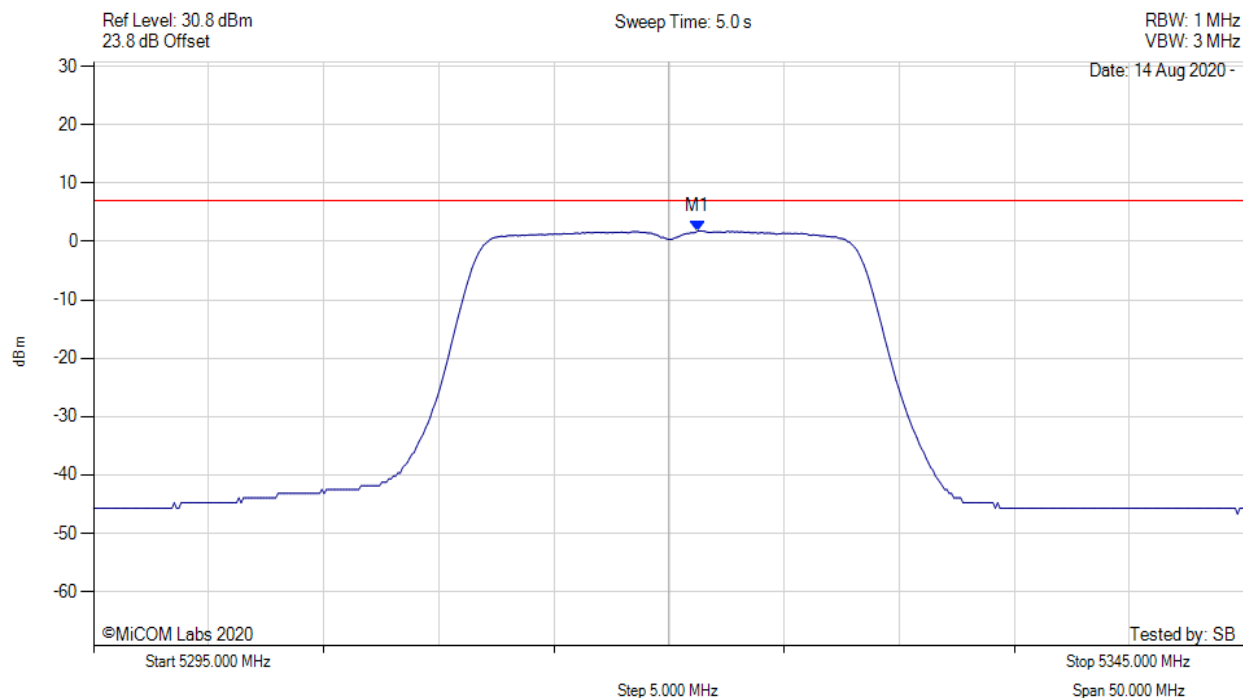


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.253 MHz : 1.798 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

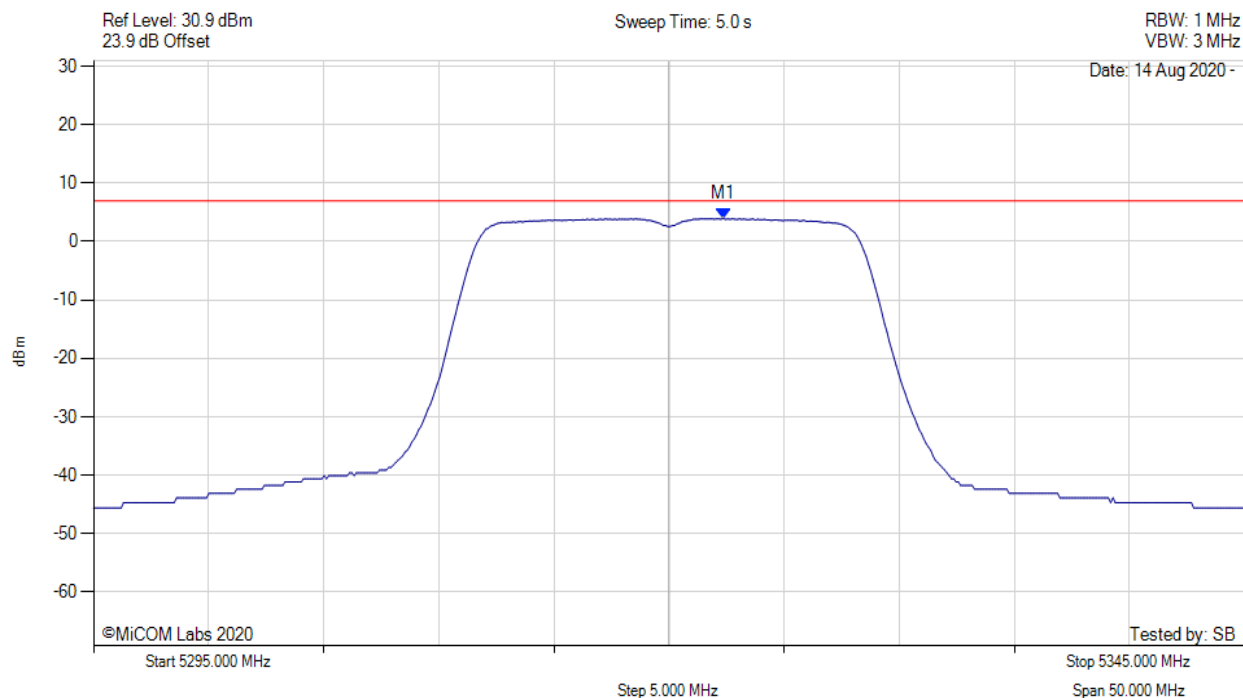


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.355 MHz : 3.939 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

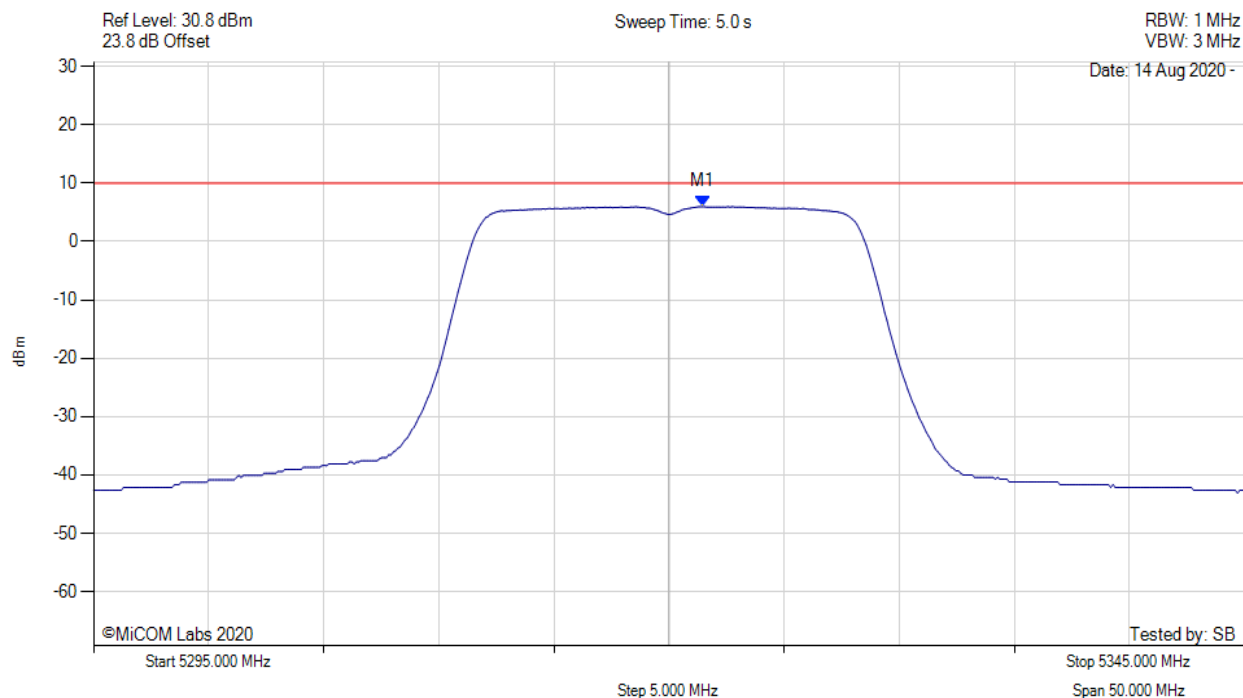


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.500 MHz : 5.979 dBm M1 + DCCF : 5321.500 MHz : 6.023 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -4.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

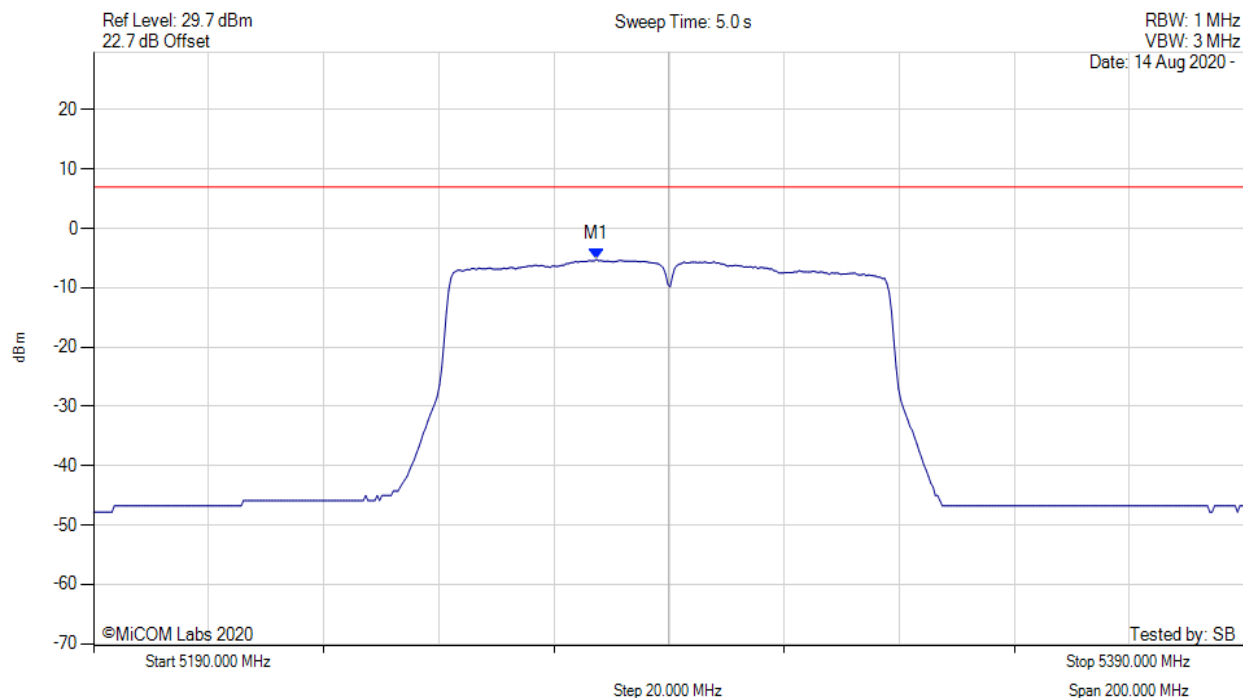


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5277.375 MHz : -5.213 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

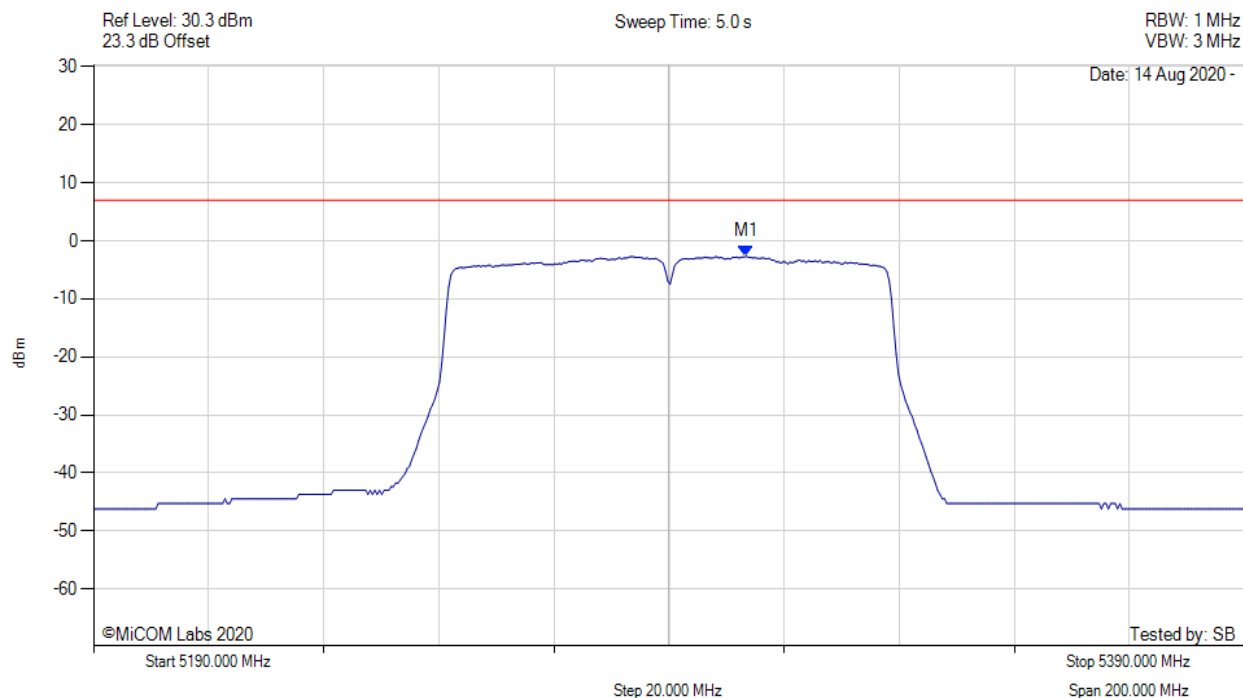


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.427 MHz : -2.678 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

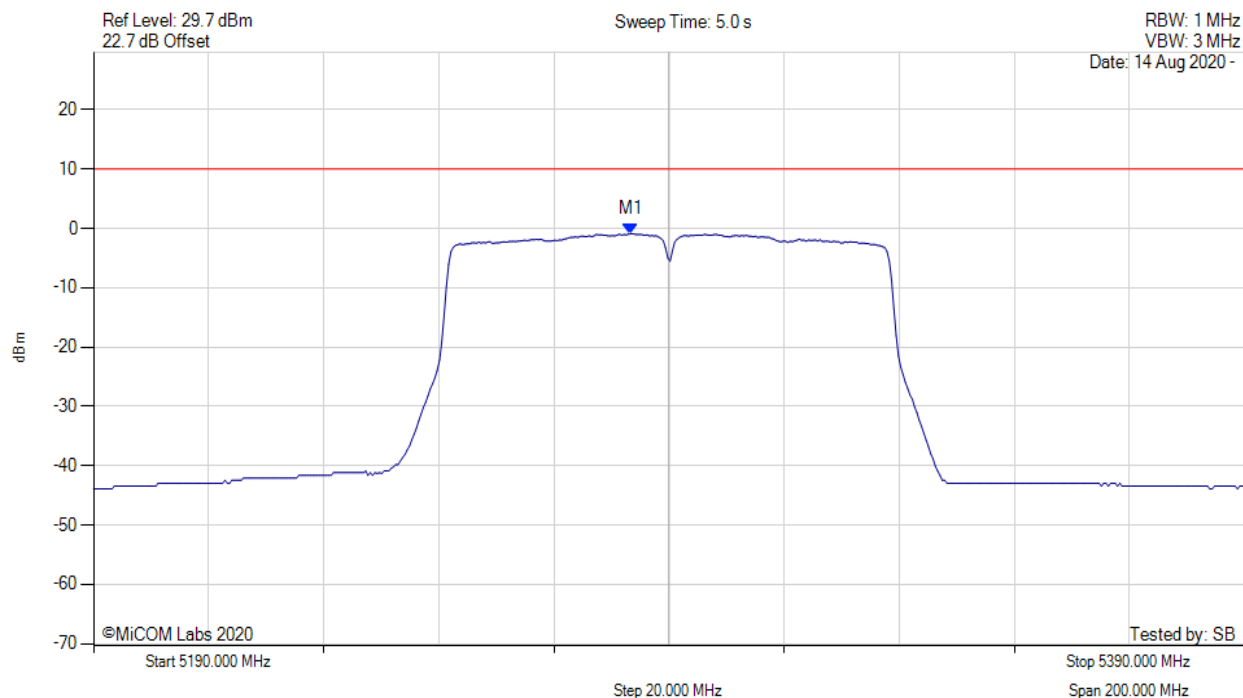


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5283.400 MHz : -0.902 dBm M1 + DCCF : 5283.400 MHz : -0.040 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ 10.0 dBm Margin: -10.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

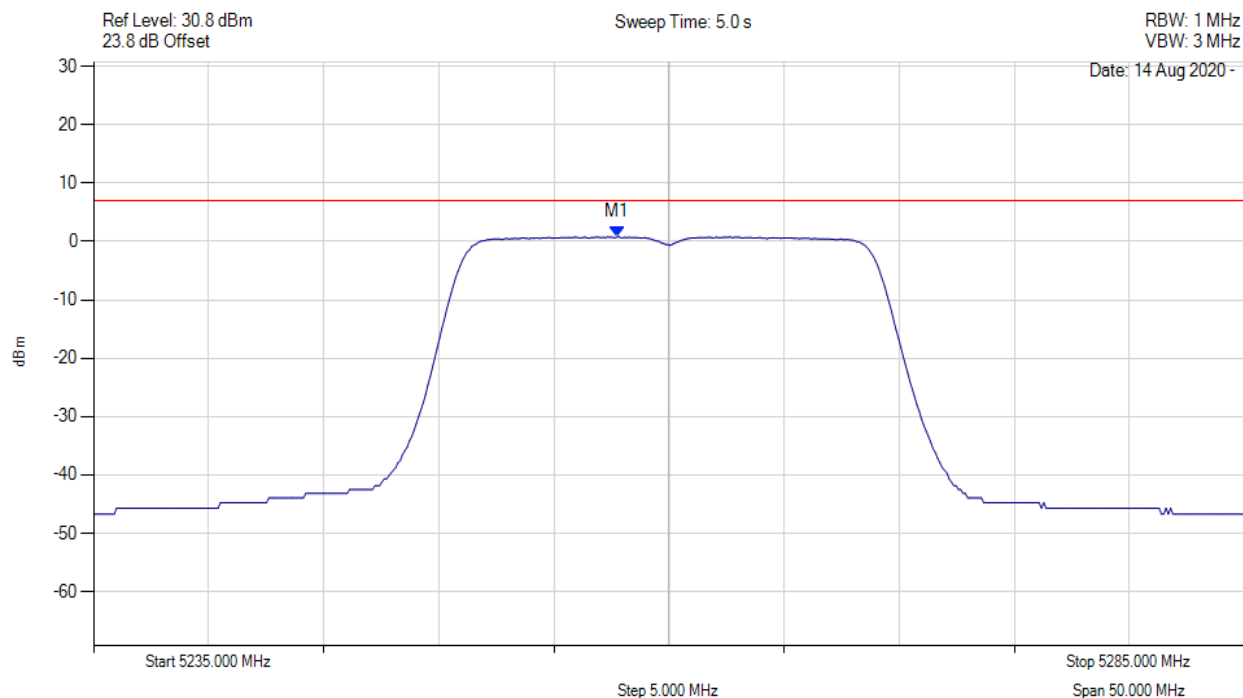


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5257.745 MHz : 0.801 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

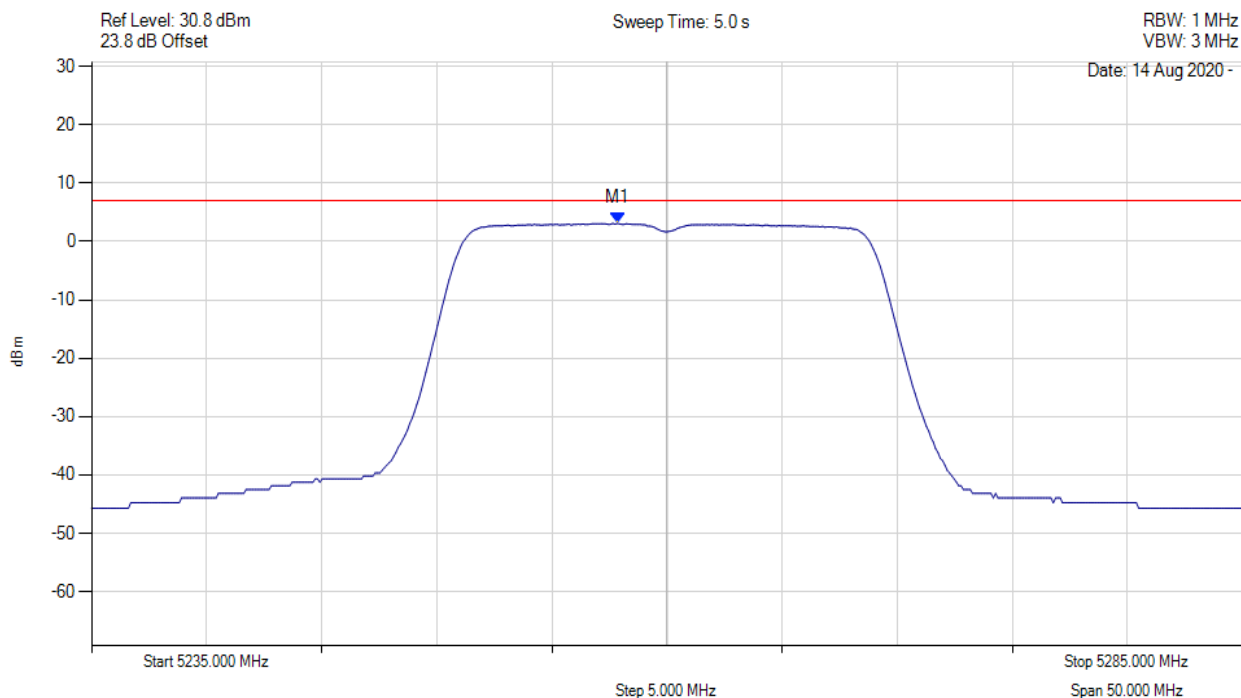


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5257.846 MHz : 3.117 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

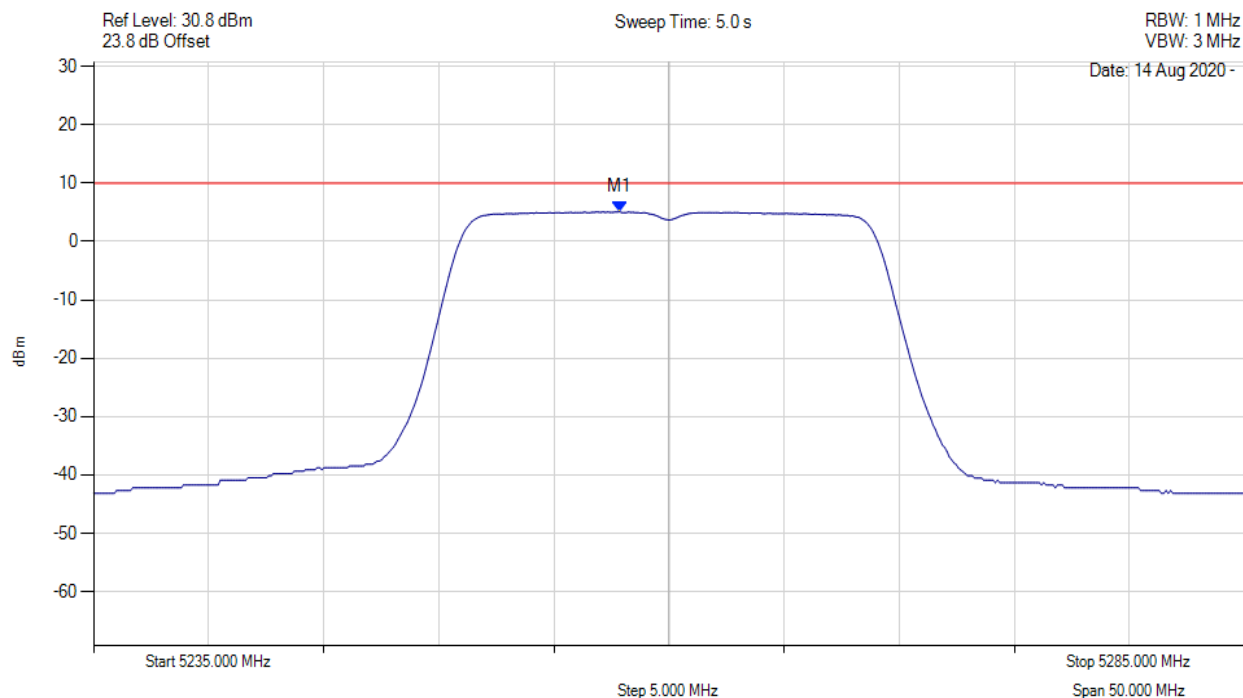


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5257.800 MHz : 5.105 dBm M1 + DCCF : 5257.800 MHz : 5.193 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -4.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

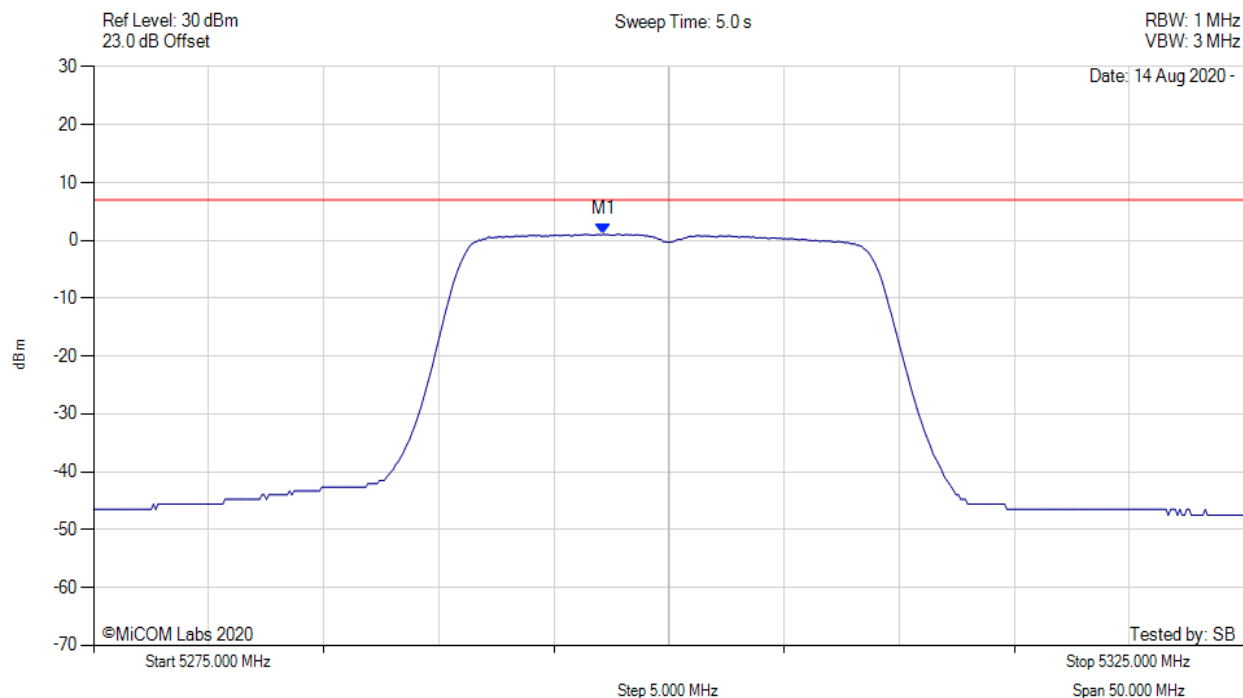


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.144 MHz : 1.096 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

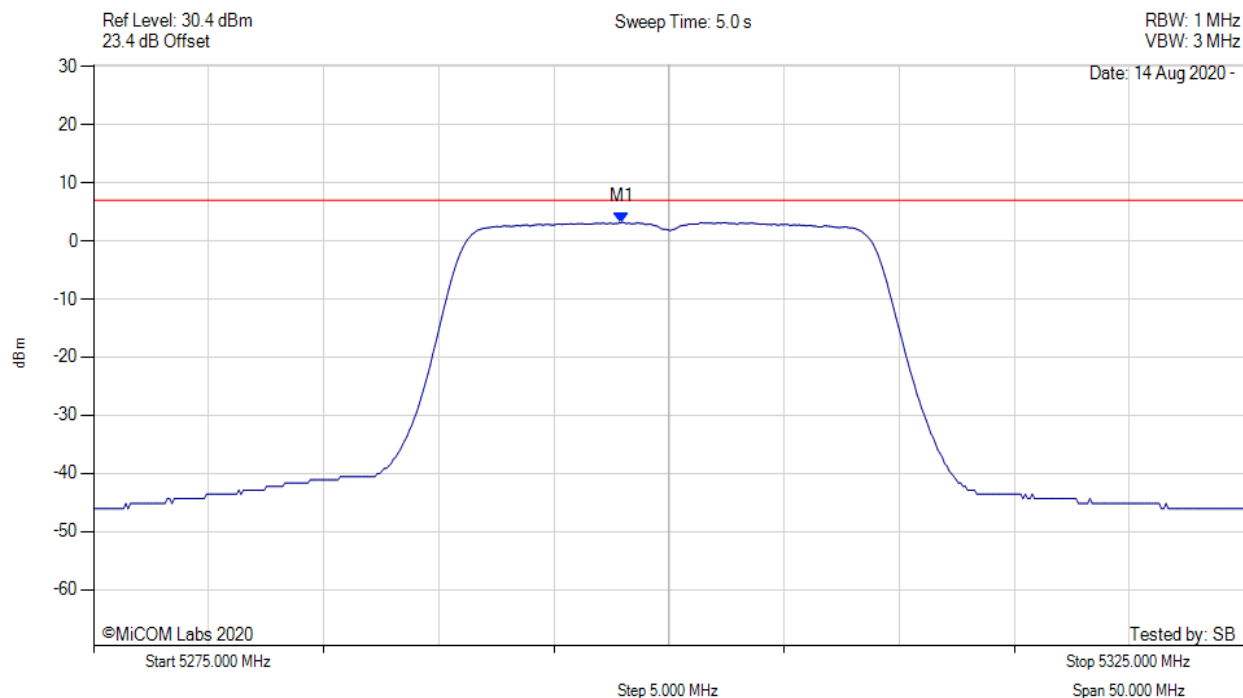


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.946 MHz : 3.194 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

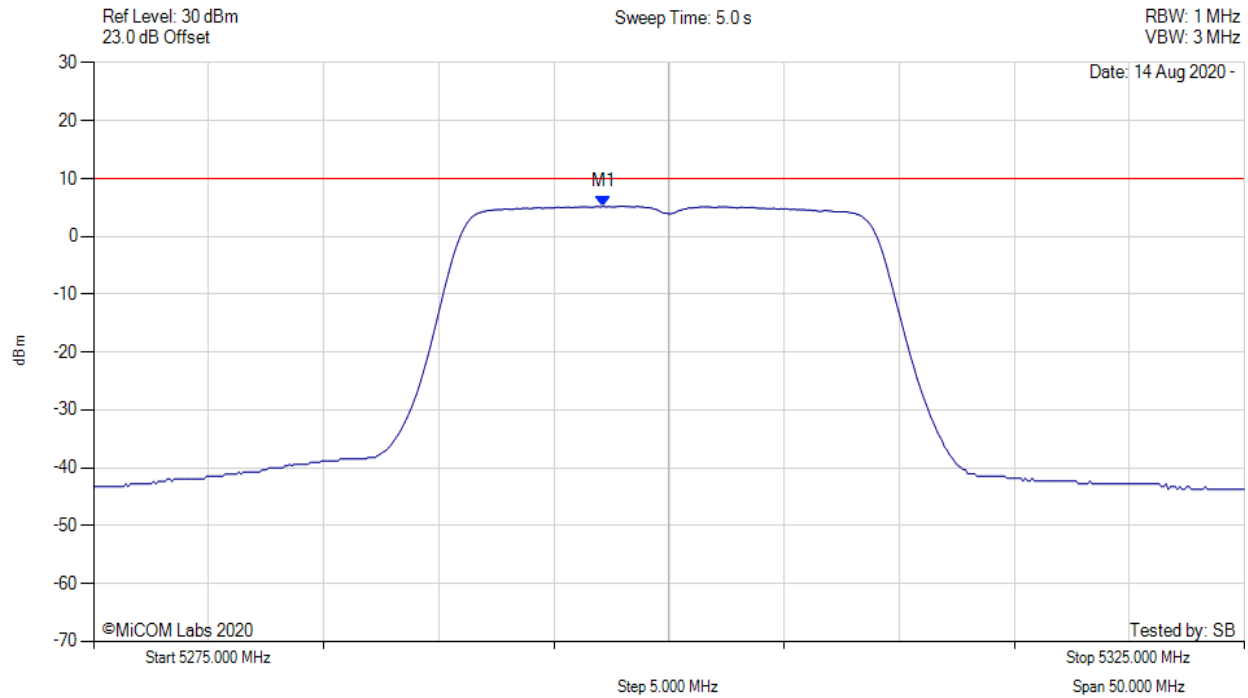


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5297.100 MHz : 5.229 dBm M1 + DCCF : 5297.100 MHz : 5.317 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -4.7 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

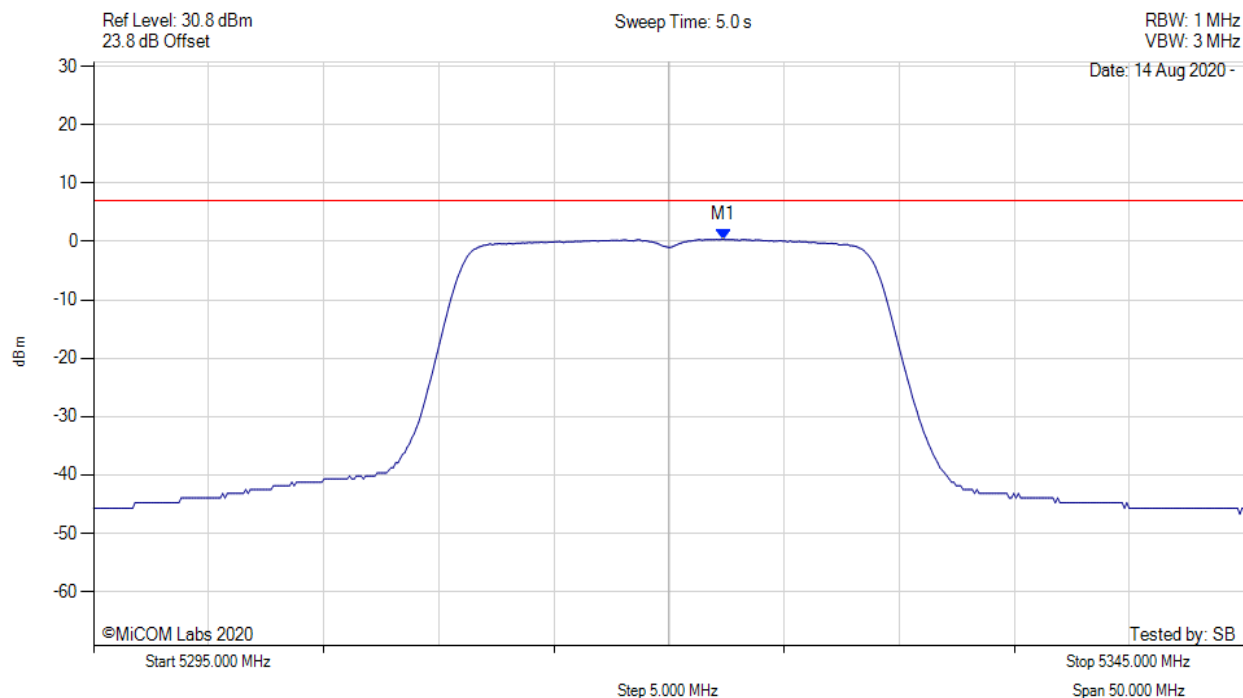


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.355 MHz : 0.369 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

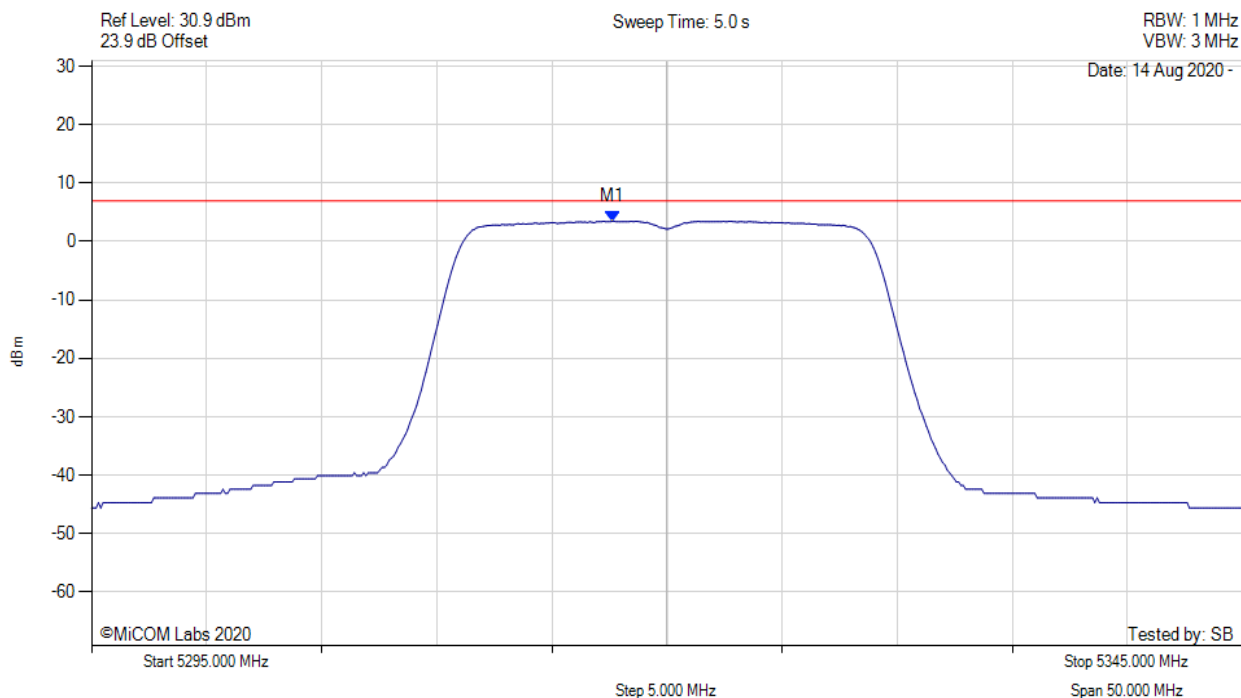


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.645 MHz : 3.520 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

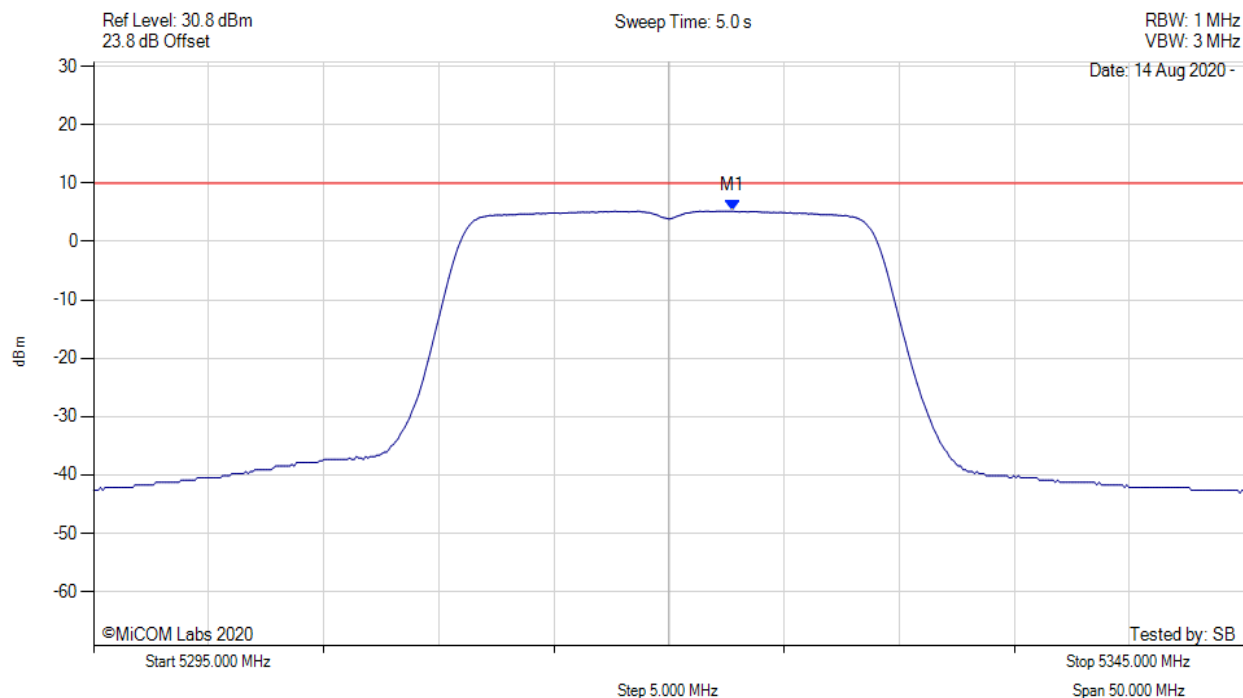


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.800 MHz : 5.200 dBm M1 + DCCF : 5322.800 MHz : 5.288 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -4.7 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

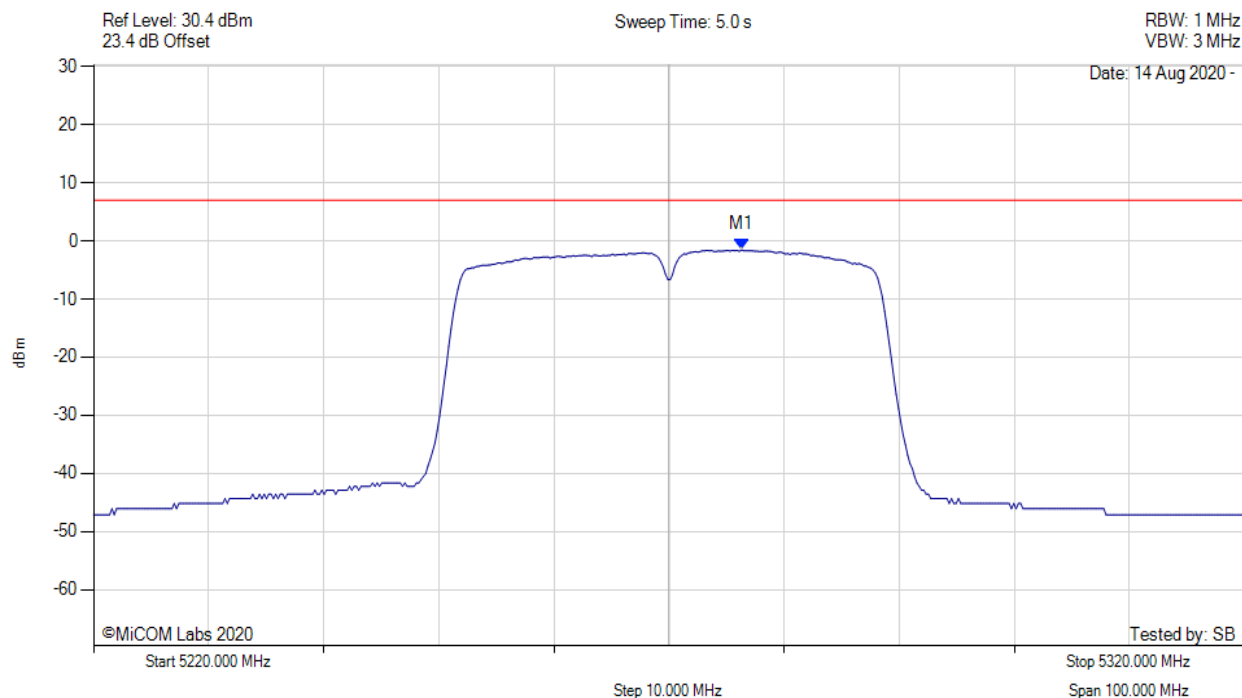


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5276.313 MHz : -1.546 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

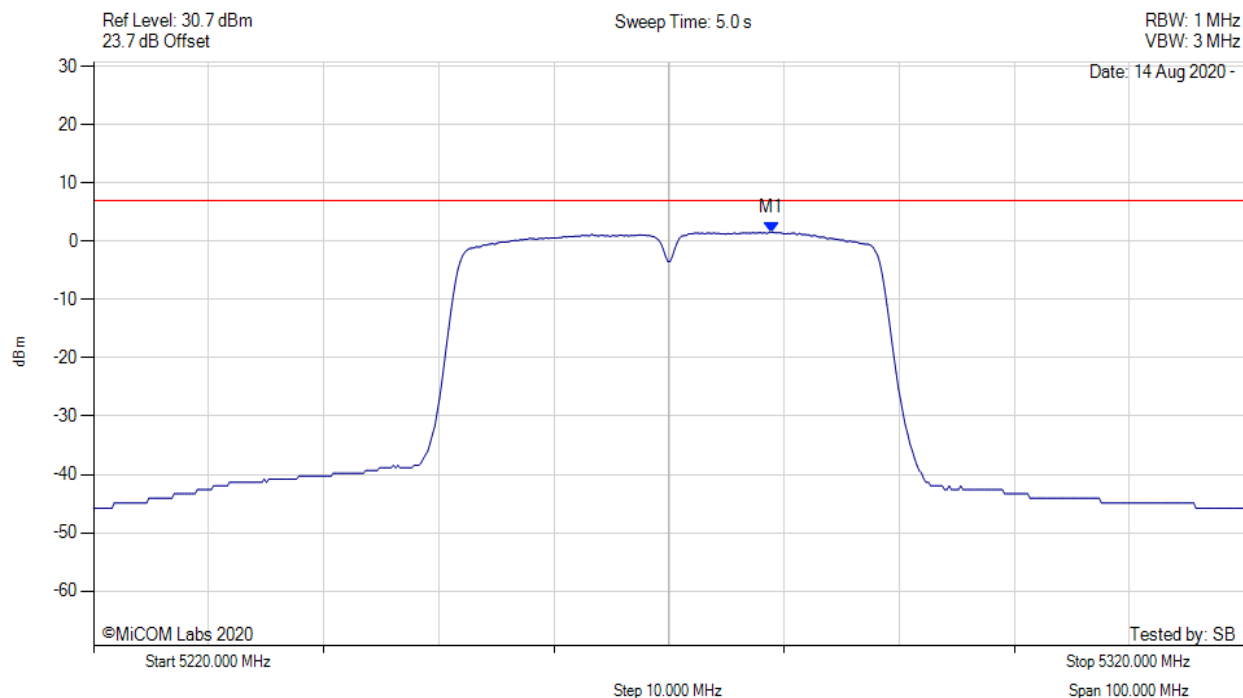


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5278.918 MHz : 1.575 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

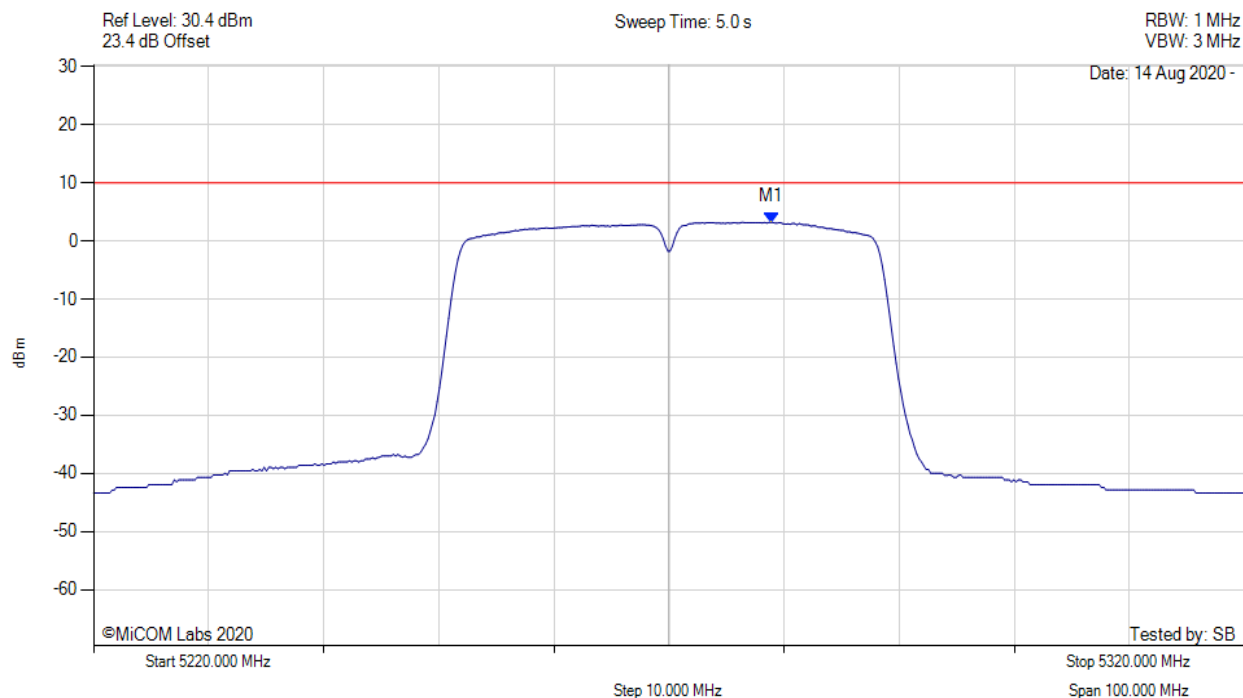


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5278.900 MHz : 3.208 dBm M1 + DCCF : 5278.900 MHz : 3.570 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 10.0 dBm Margin: -6.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

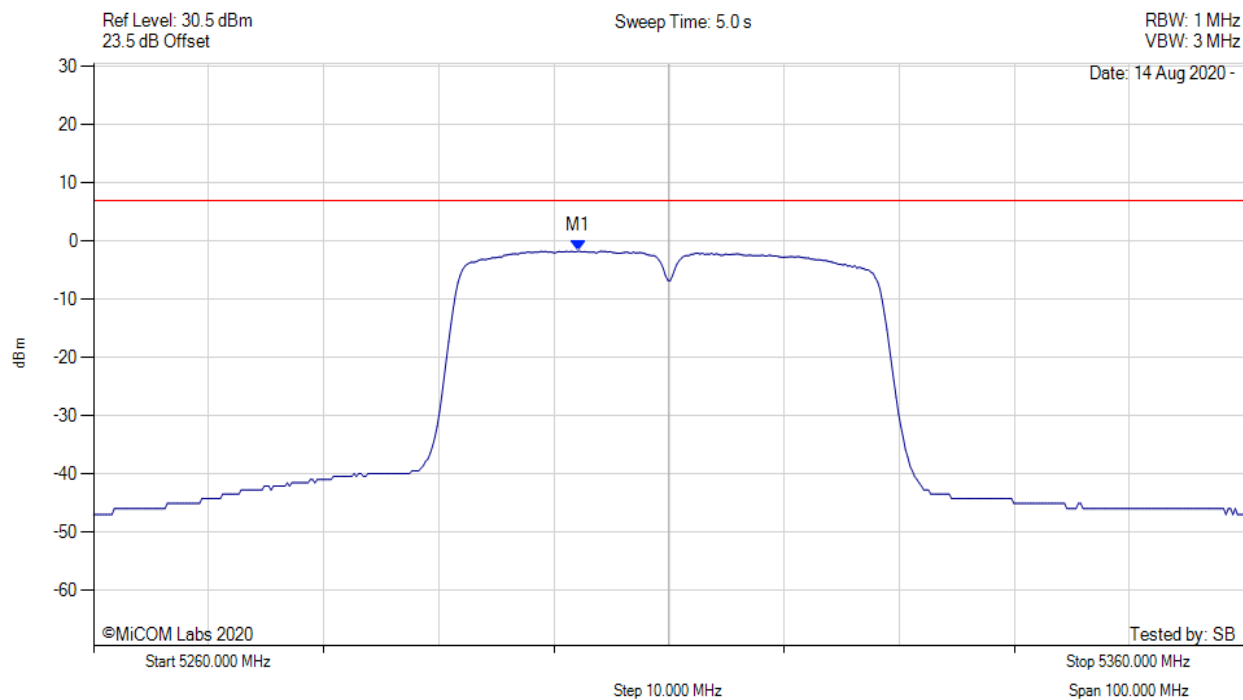


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5302.084 MHz : -1.725 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

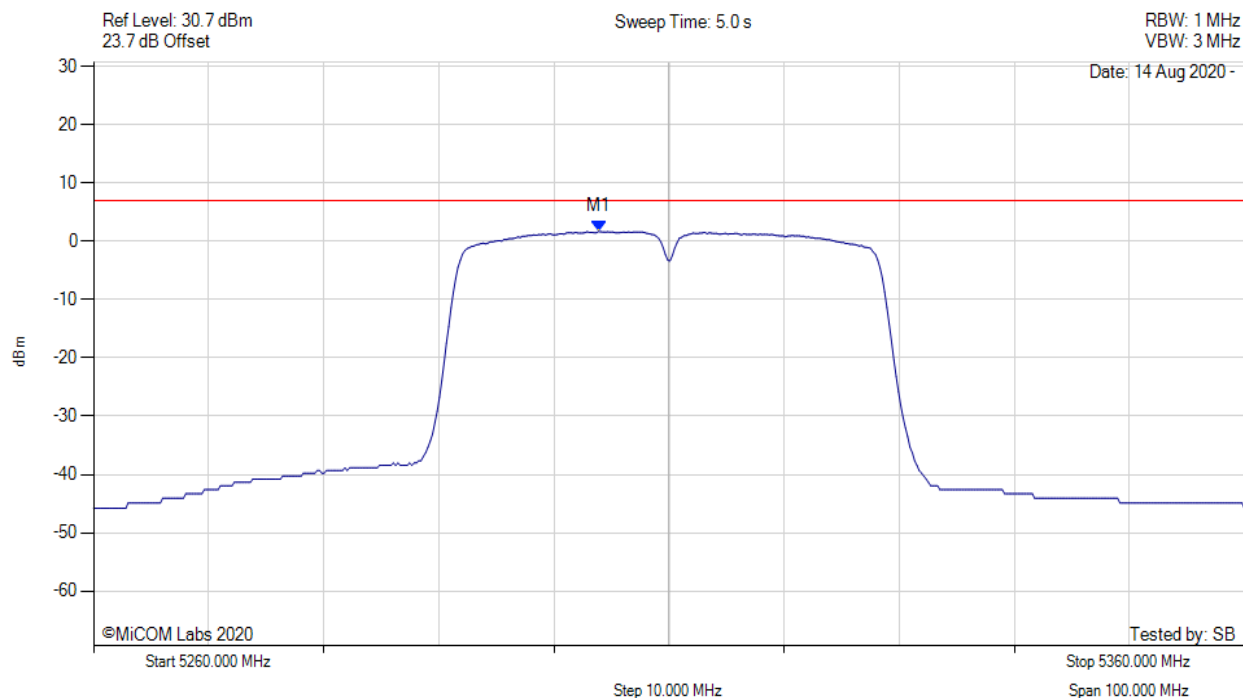


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.888 MHz : 1.702 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

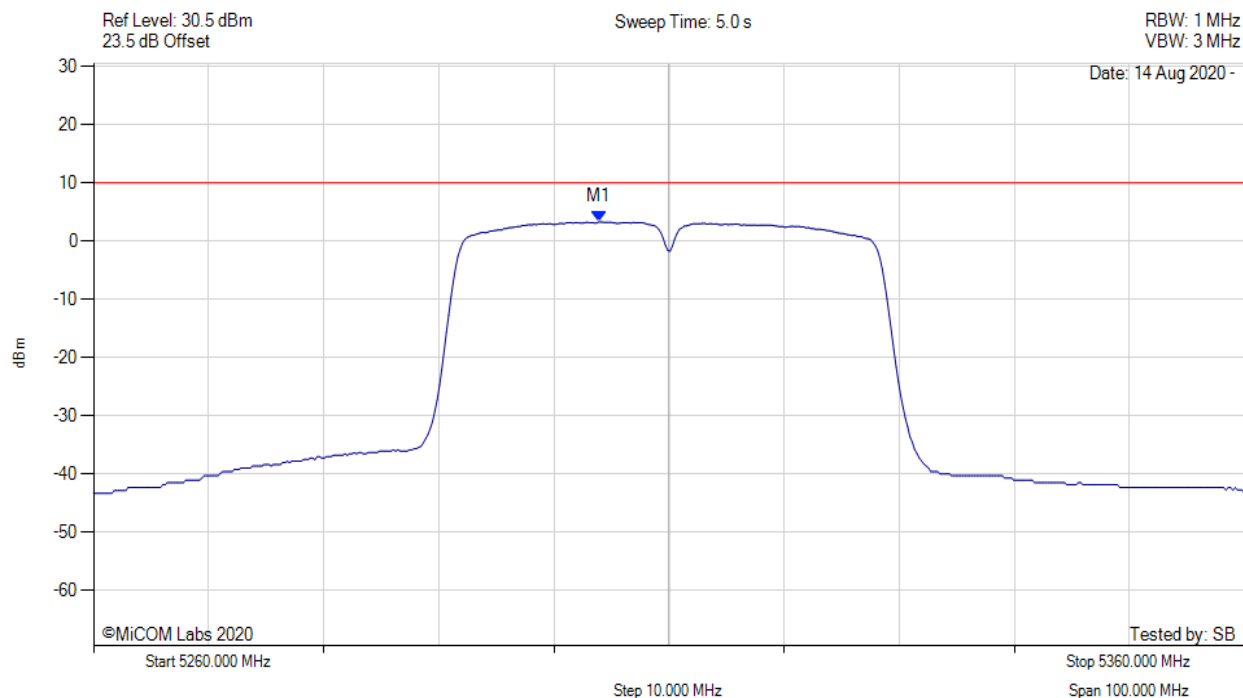


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.900 MHz : 3.288 dBm M1 + DCCF : 5303.900 MHz : 3.650 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 10.0 dBm Margin: -6.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

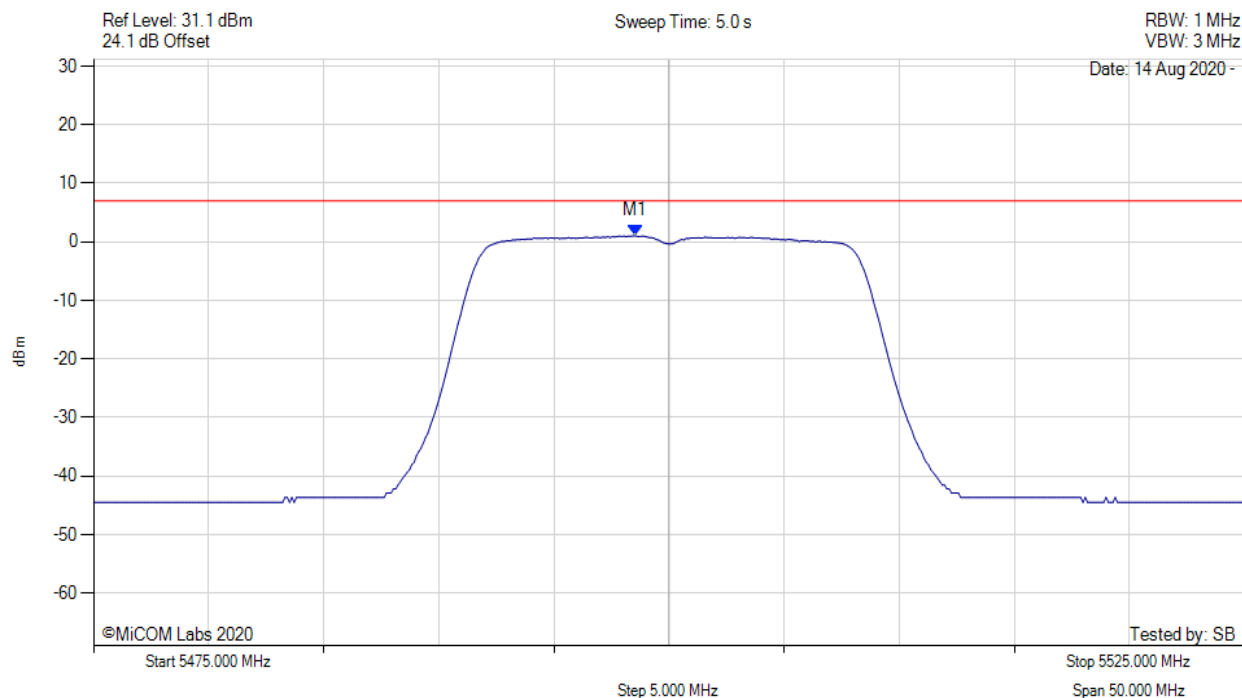


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5498.547 MHz : 1.050 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

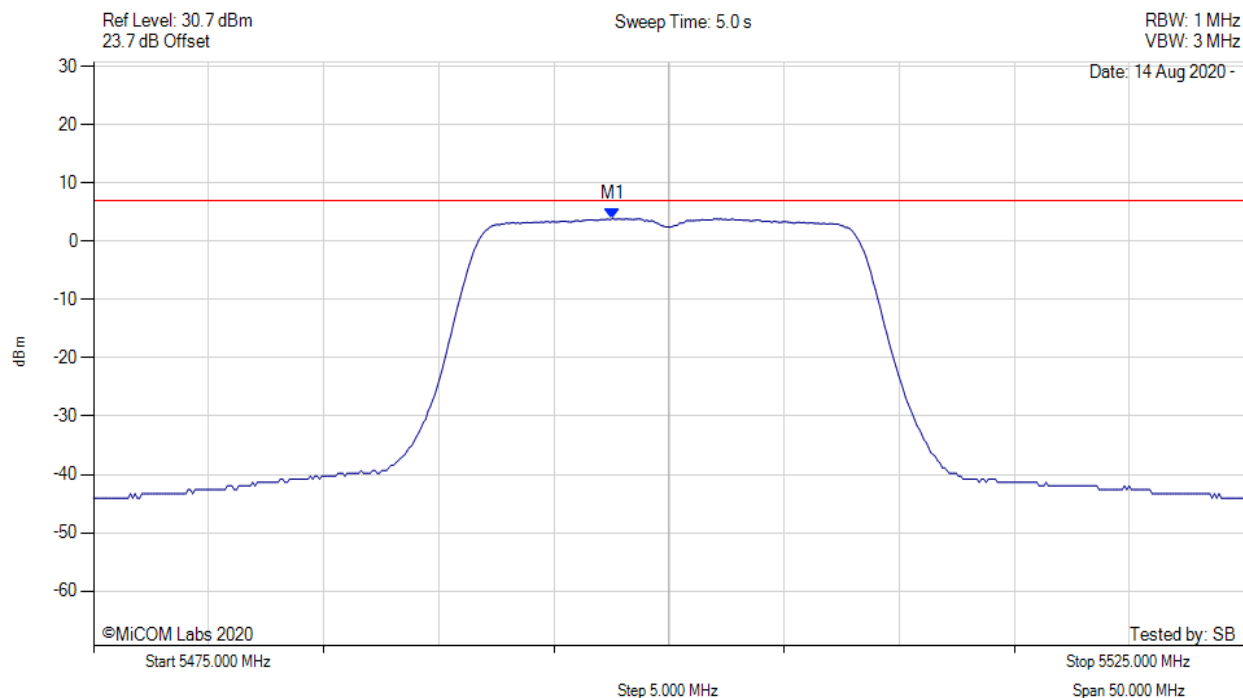


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.545 MHz : 3.902 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

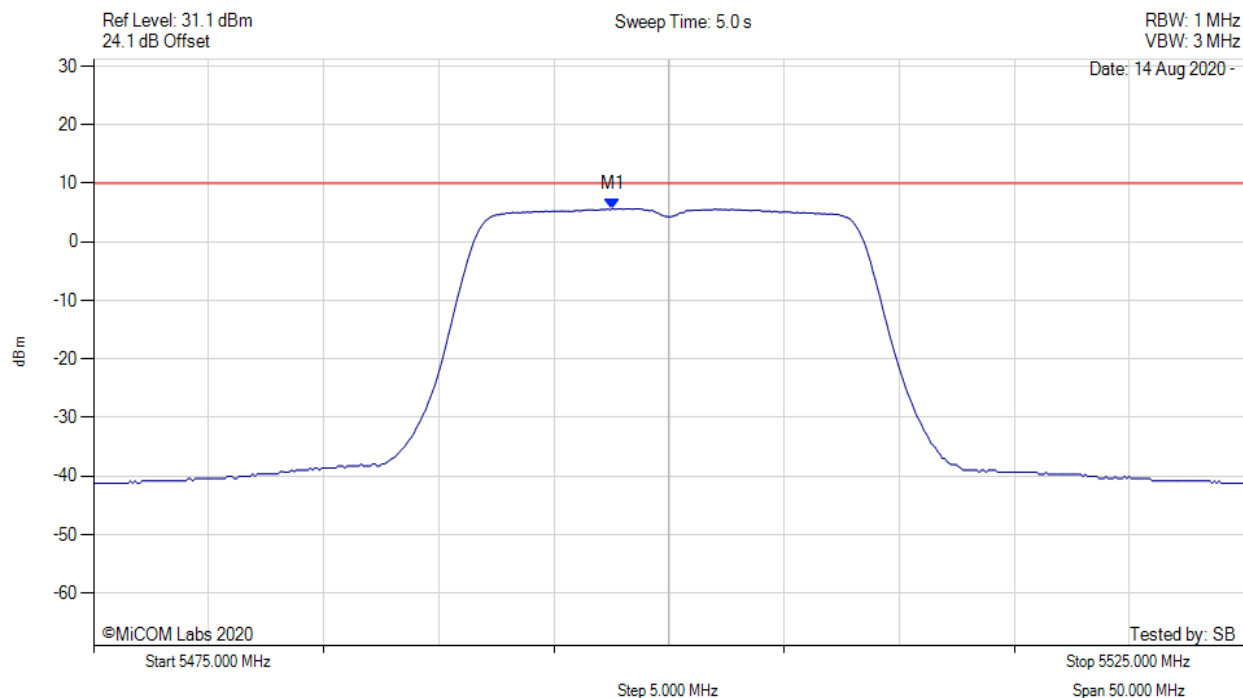


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.500 MHz : 5.663 dBm M1 + DCCF : 5497.500 MHz : 5.707 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -4.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

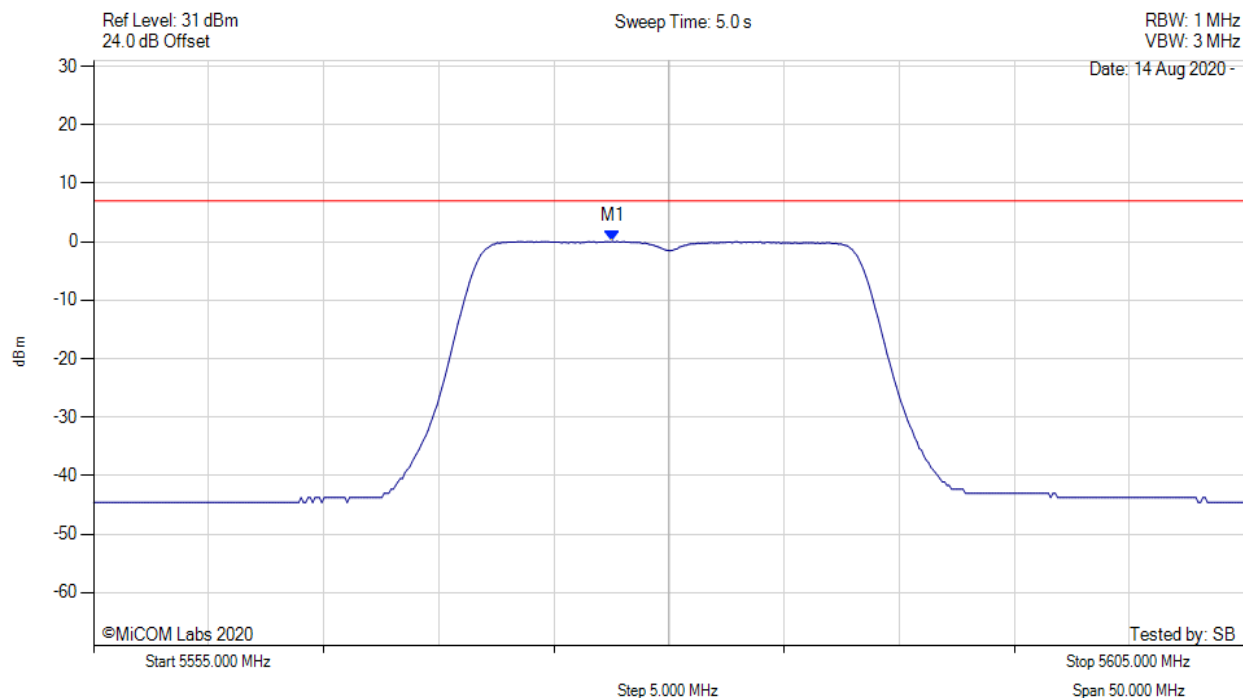


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5577.545 MHz : 0.059 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

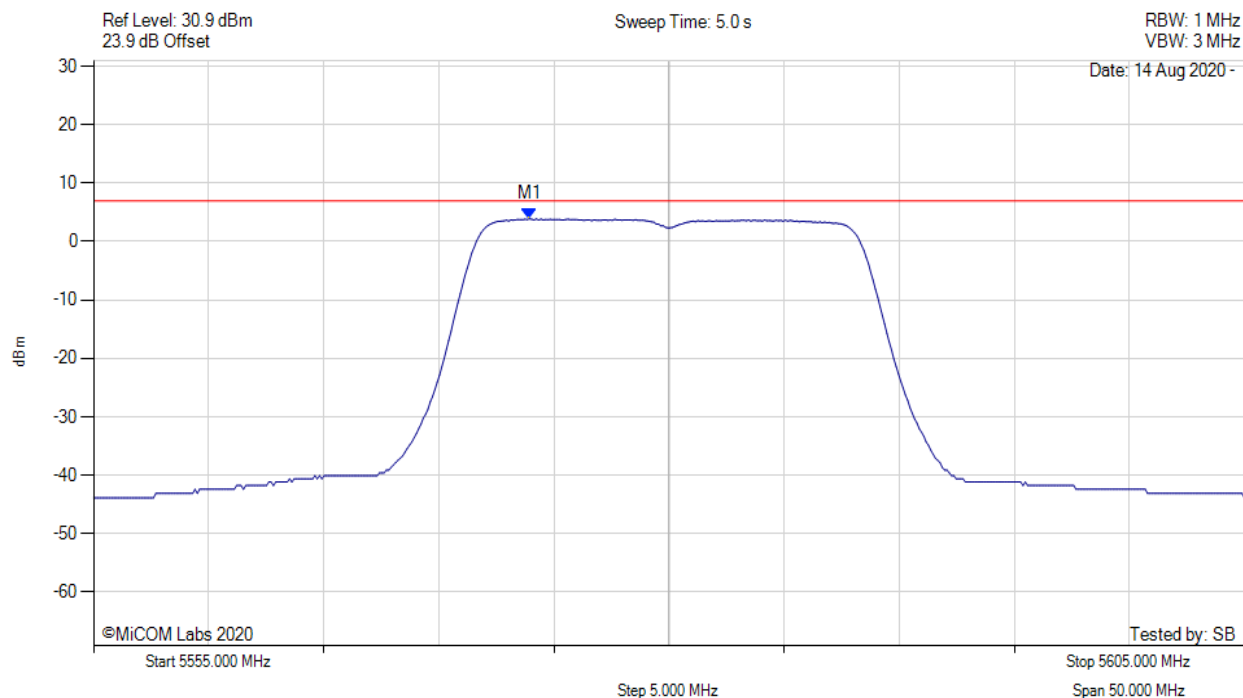


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5573.938 MHz : 3.894 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

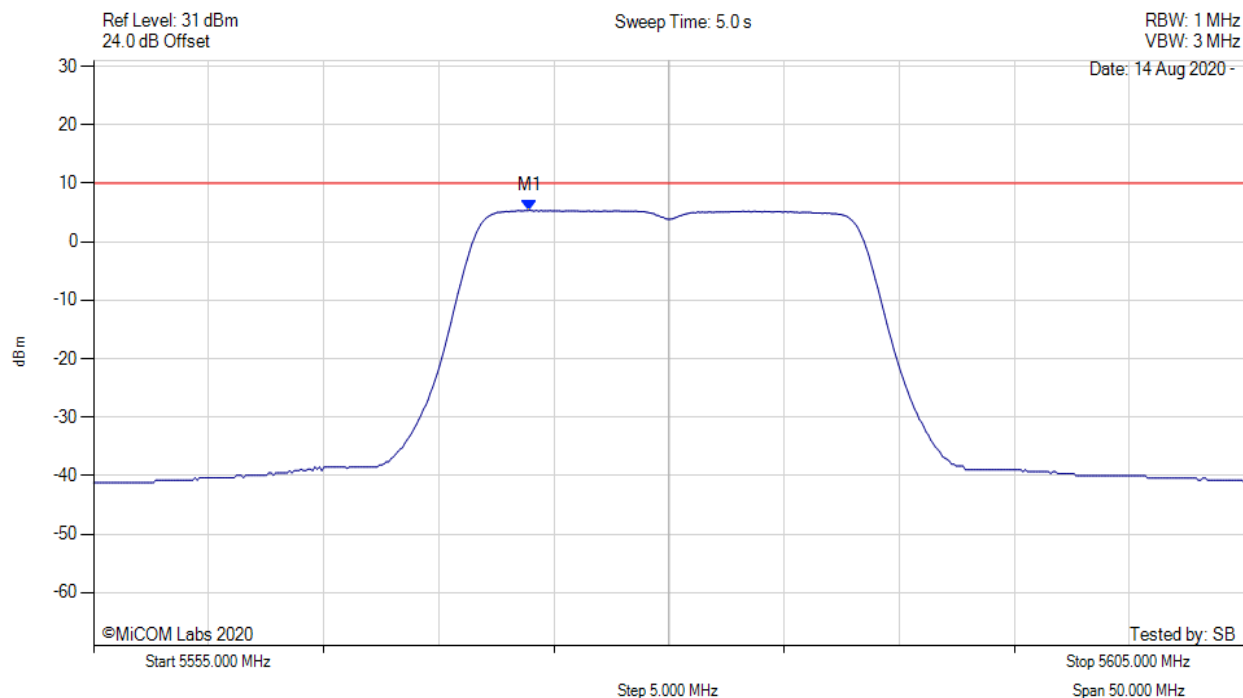


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5573.900 MHz : 5.372 dBm M1 + DCCF : 5573.900 MHz : 5.416 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -4.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

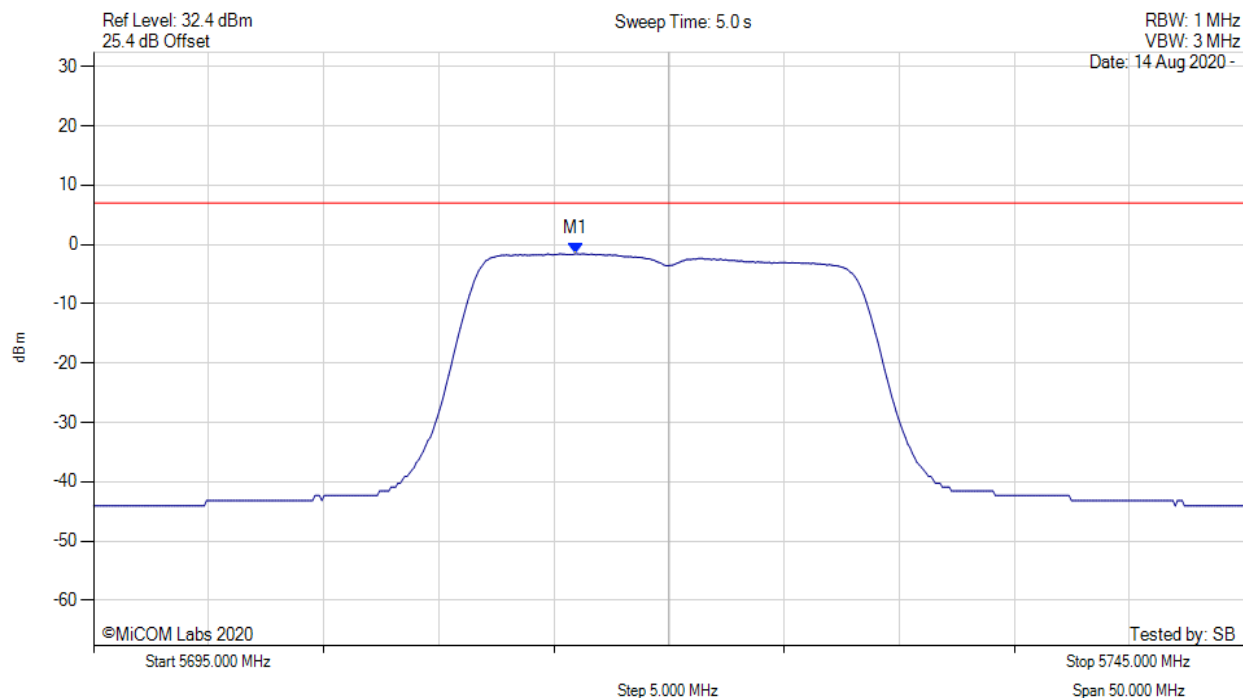


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5715.942 MHz : -1.546 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

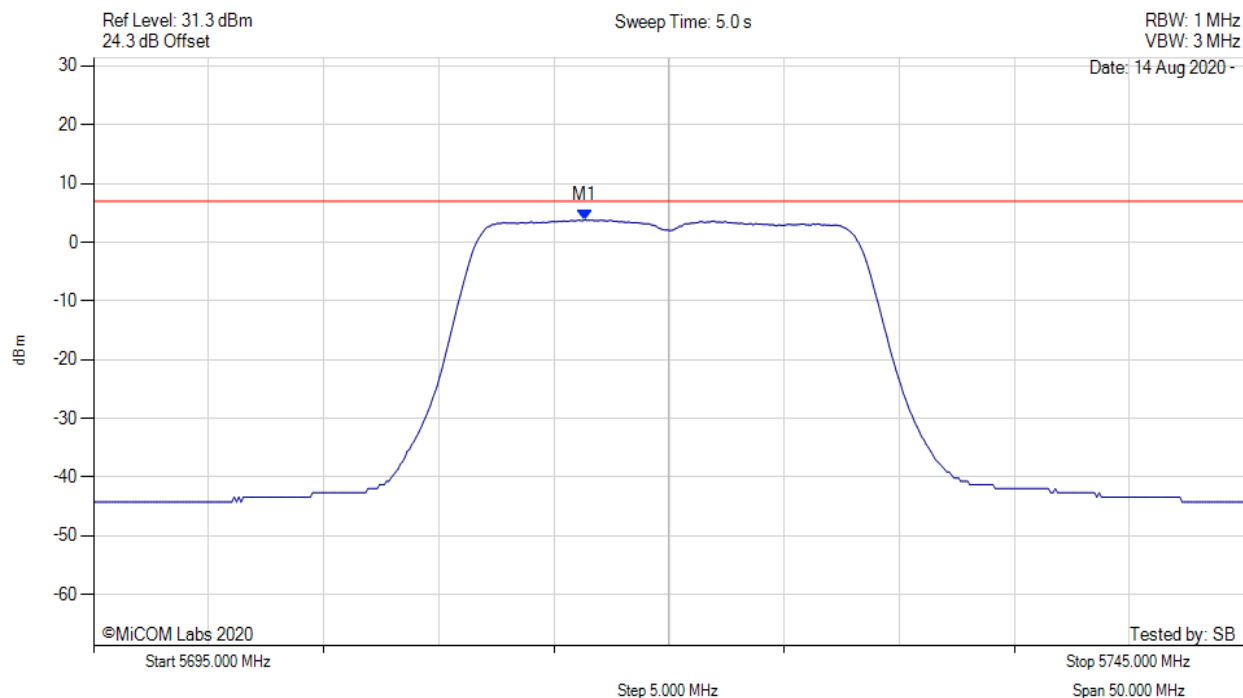


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5716.343 MHz : 3.797 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

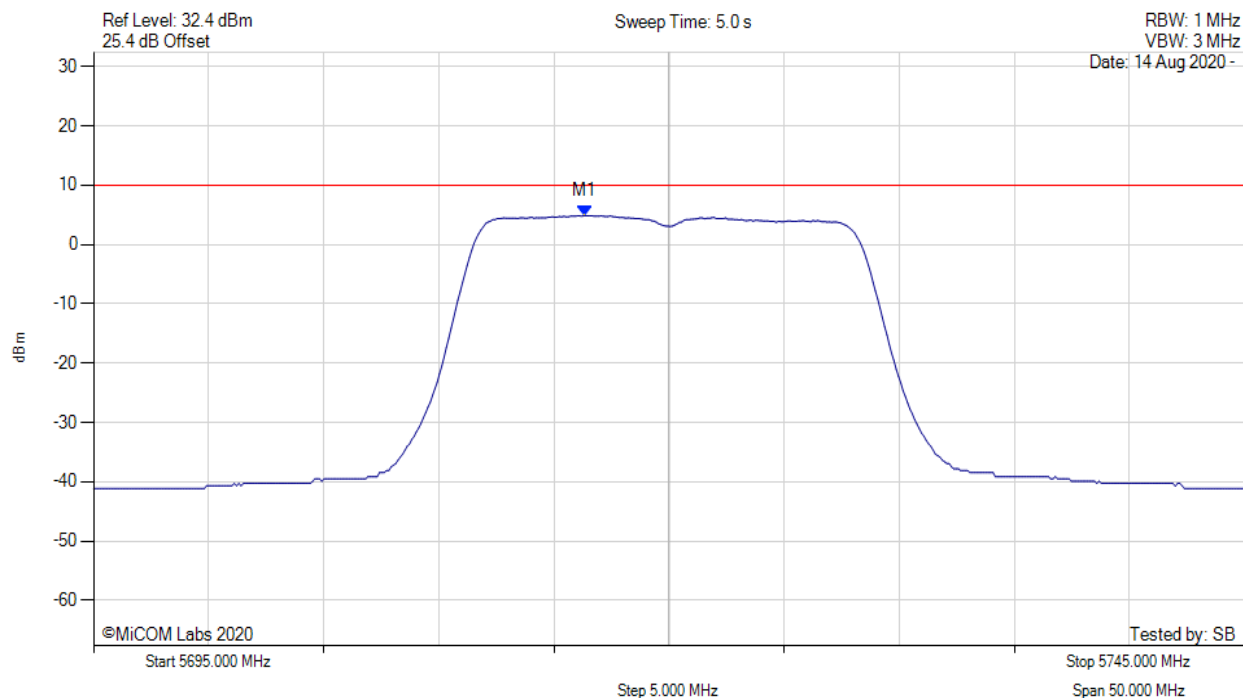


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5716.300 MHz : 4.896 dBm M1 + DCCF : 5716.300 MHz : 4.940 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 10.0 dBm Margin: -5.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

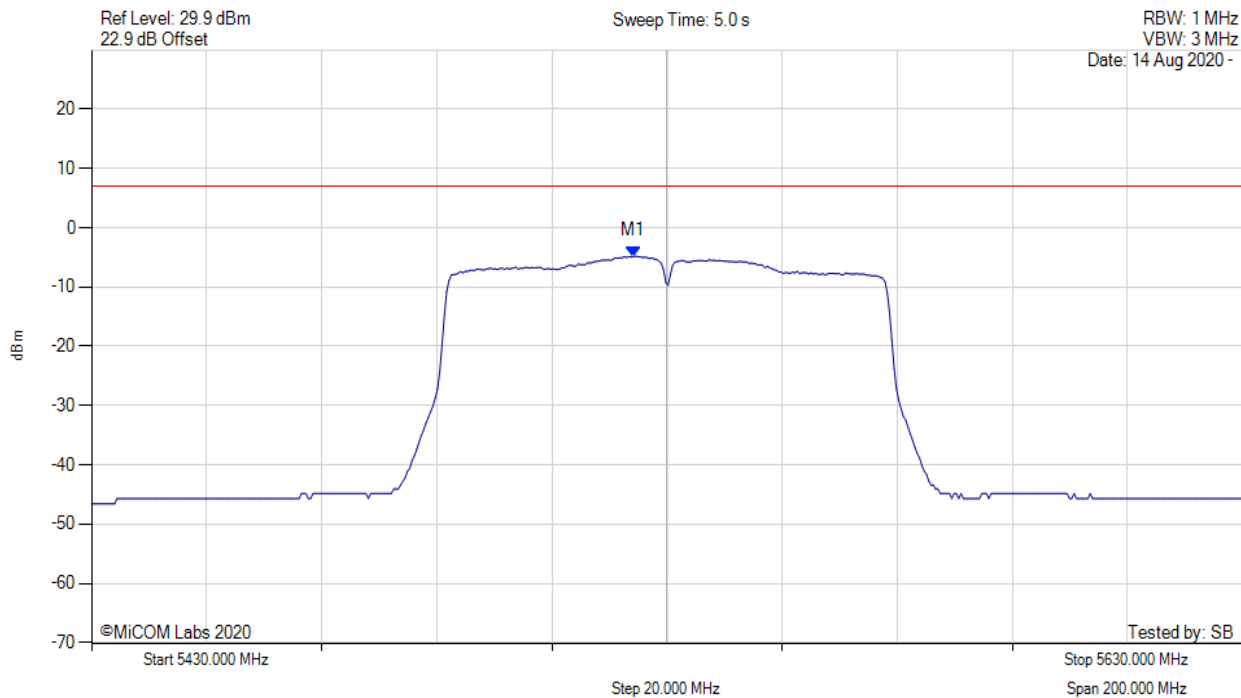


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5524.188 MHz : -4.830 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

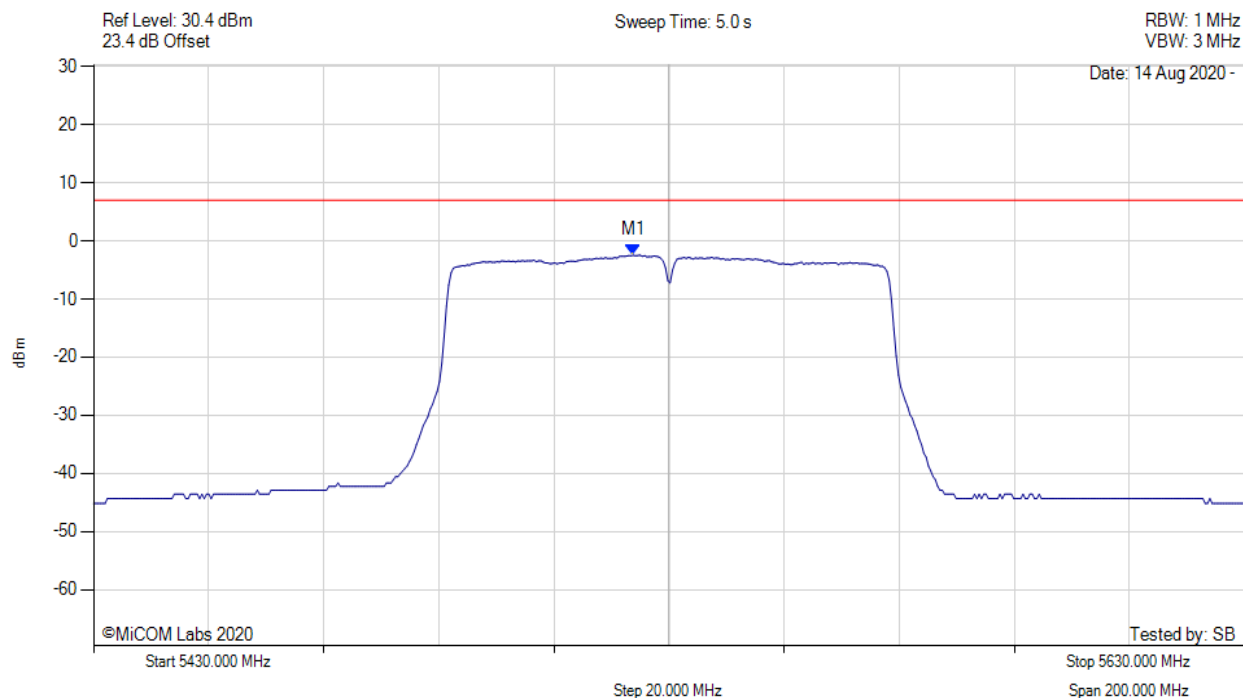


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5523.788 MHz : -2.444 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

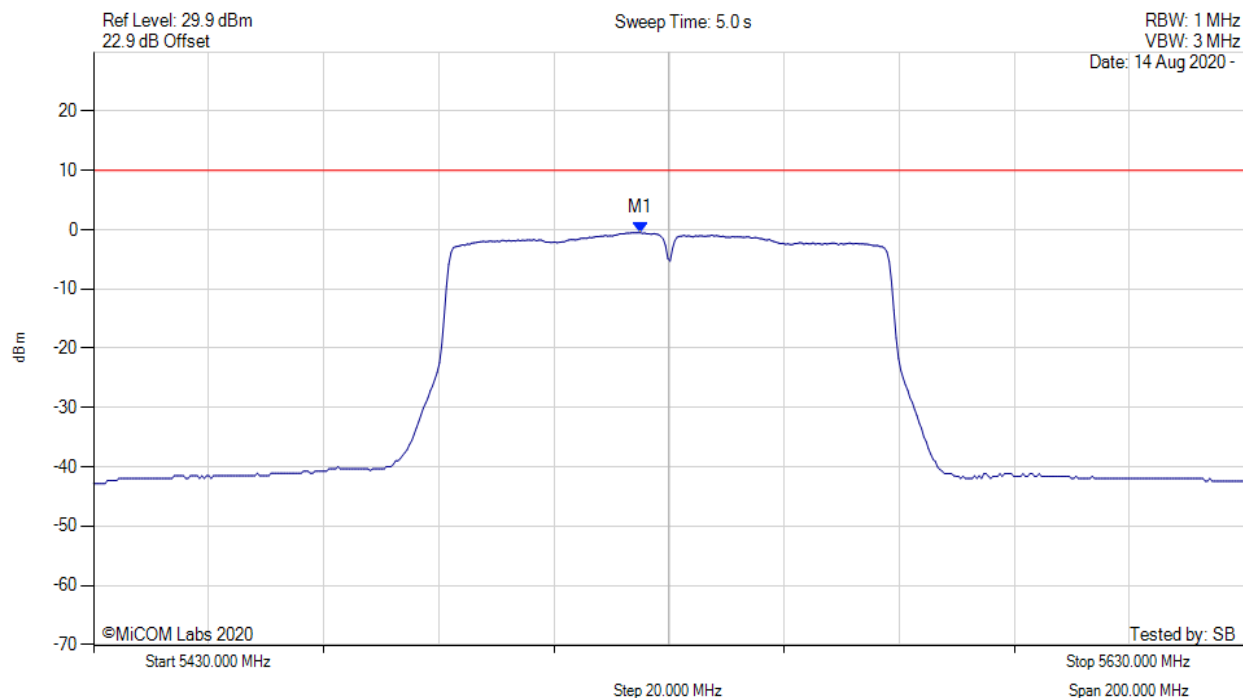


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5525.000 MHz : -0.487 dBm M1 + DCCF : 5525.000 MHz : 0.375 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ 10.0 dBm Margin: -9.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

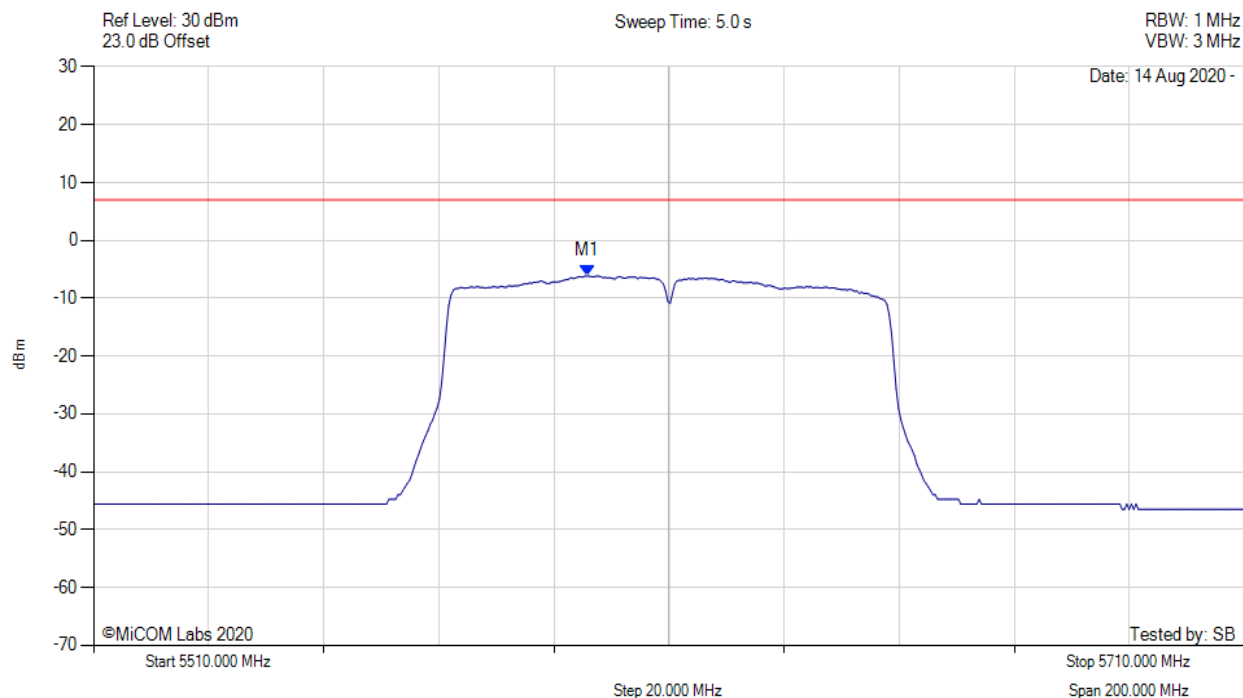


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5595.772 MHz : -6.140 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

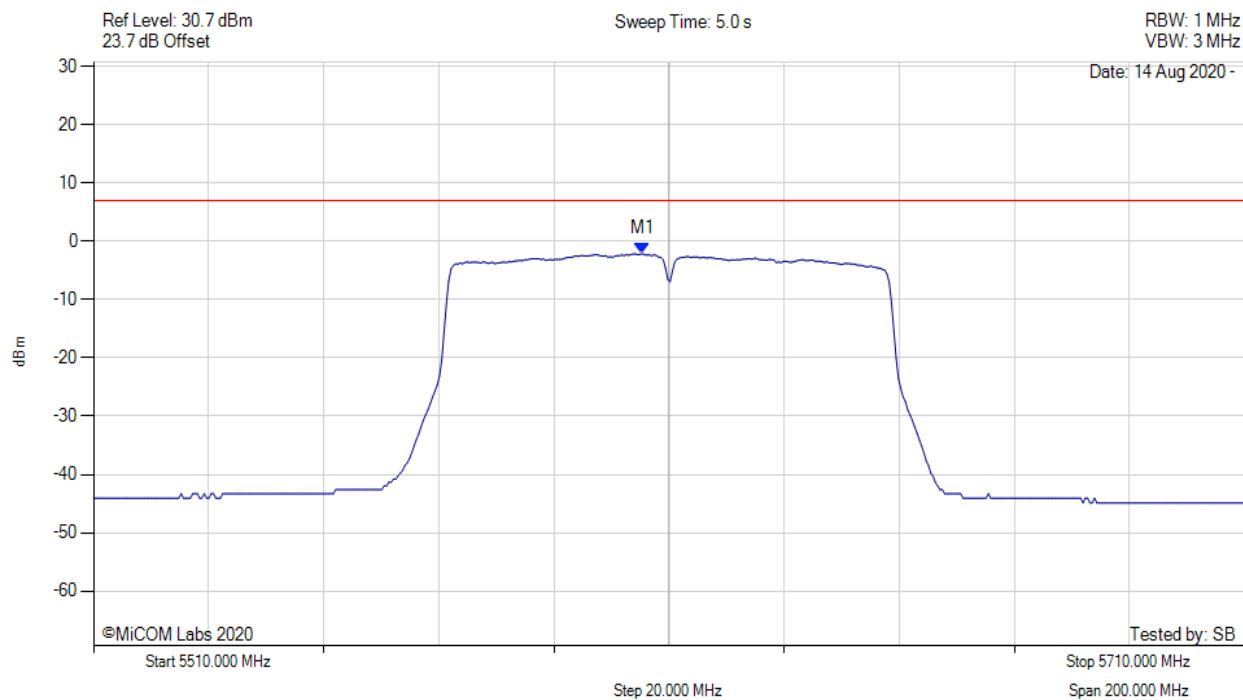


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5605.391 MHz : -2.144 dBm	Channel Frequency: 5610.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

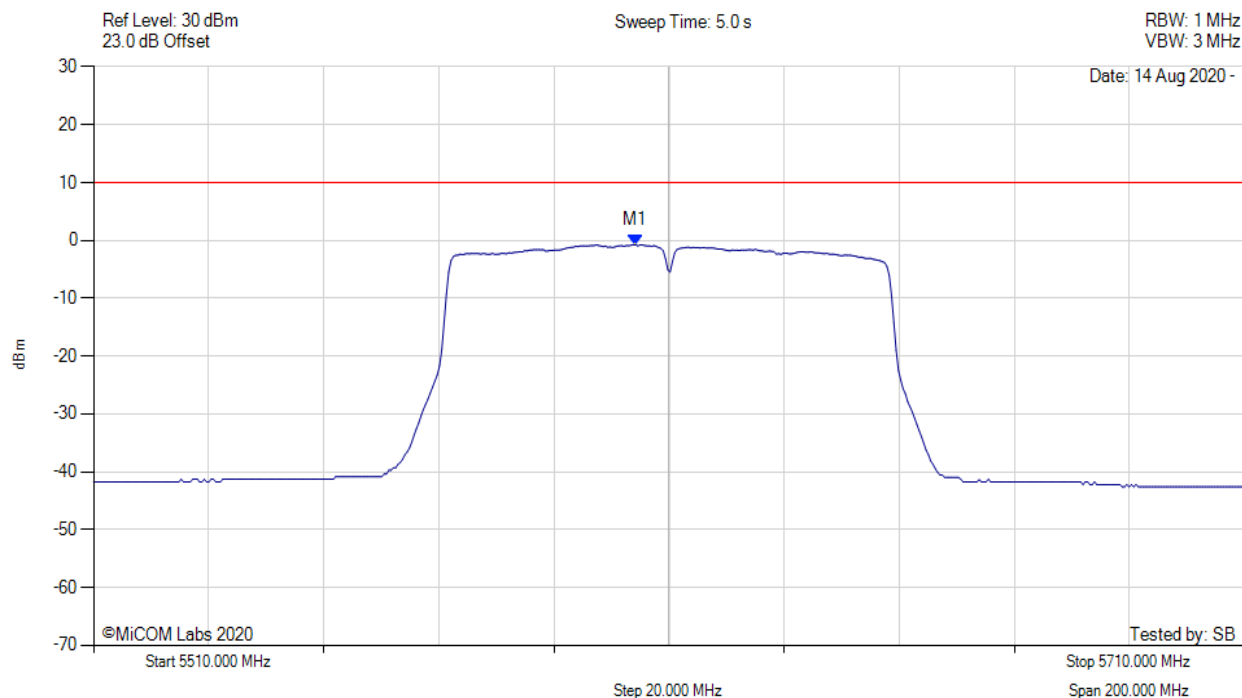


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5604.200 MHz : -0.756 dBm M1 + DCCF : 5604.200 MHz : 0.106 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ 10.0 dBm Margin: -9.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

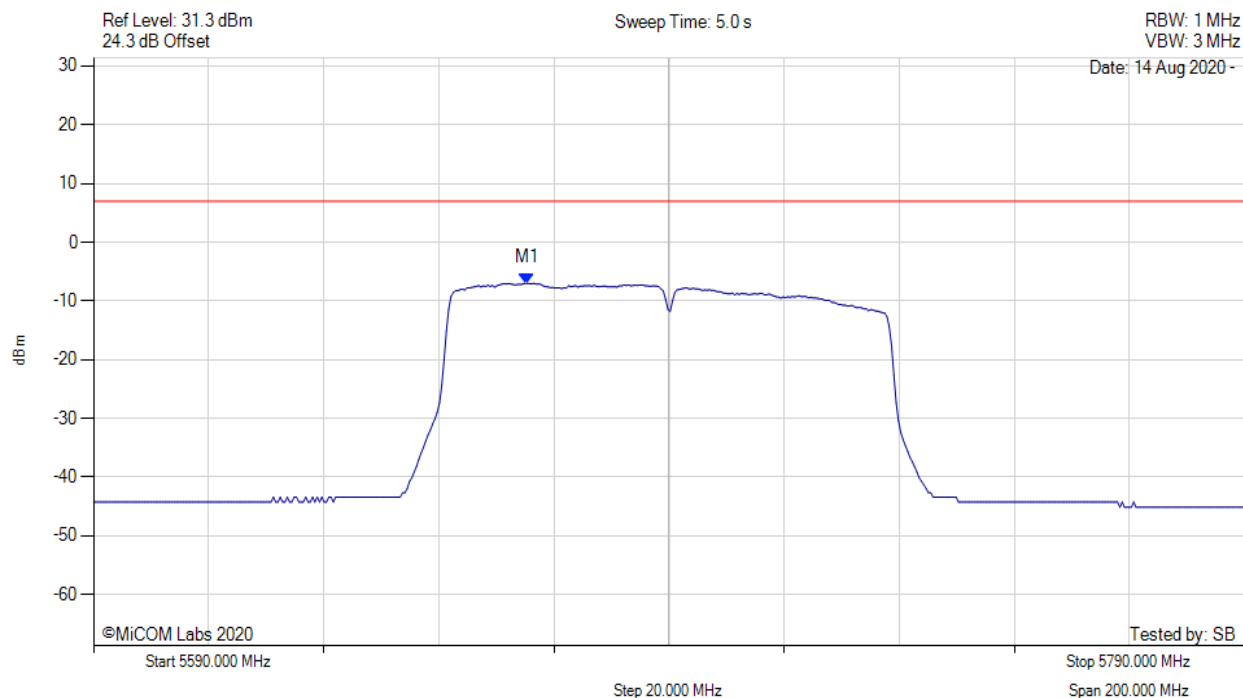


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5665.351 MHz : -7.011 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

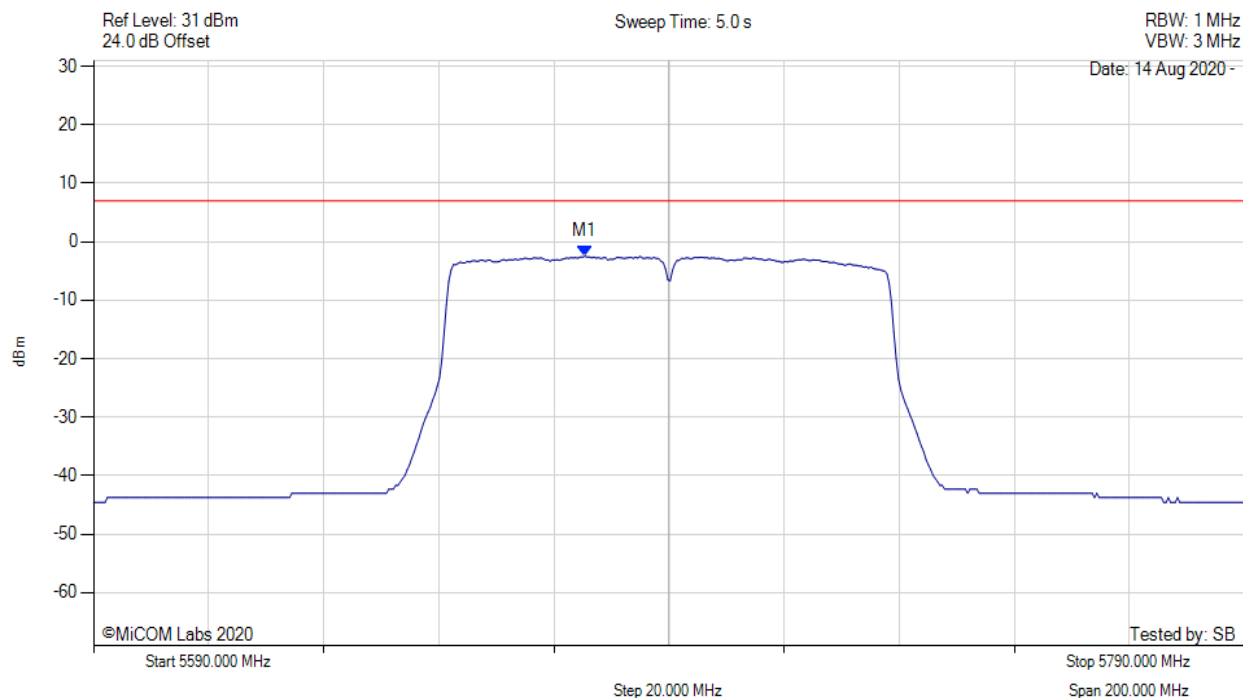


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5675.371 MHz : -2.469 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

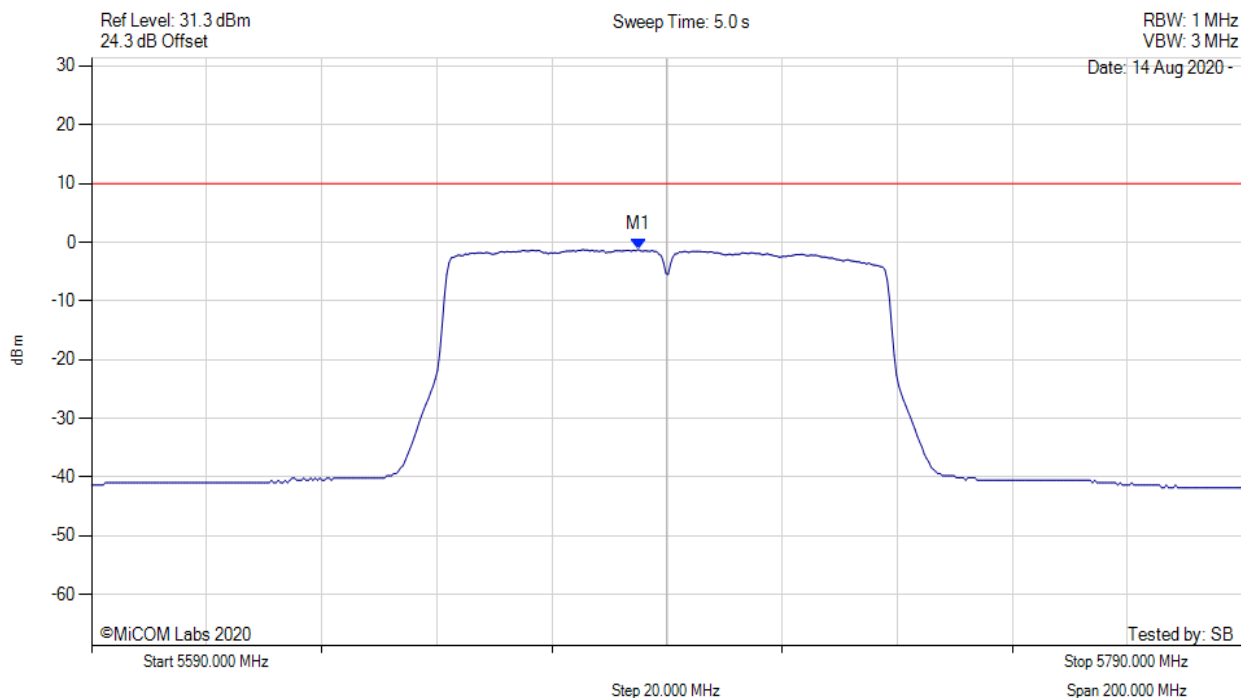


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5685.000 MHz : -1.252 dBm M1 + DCCF : 5685.000 MHz : -0.390 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ 10.0 dBm Margin: -10.4 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

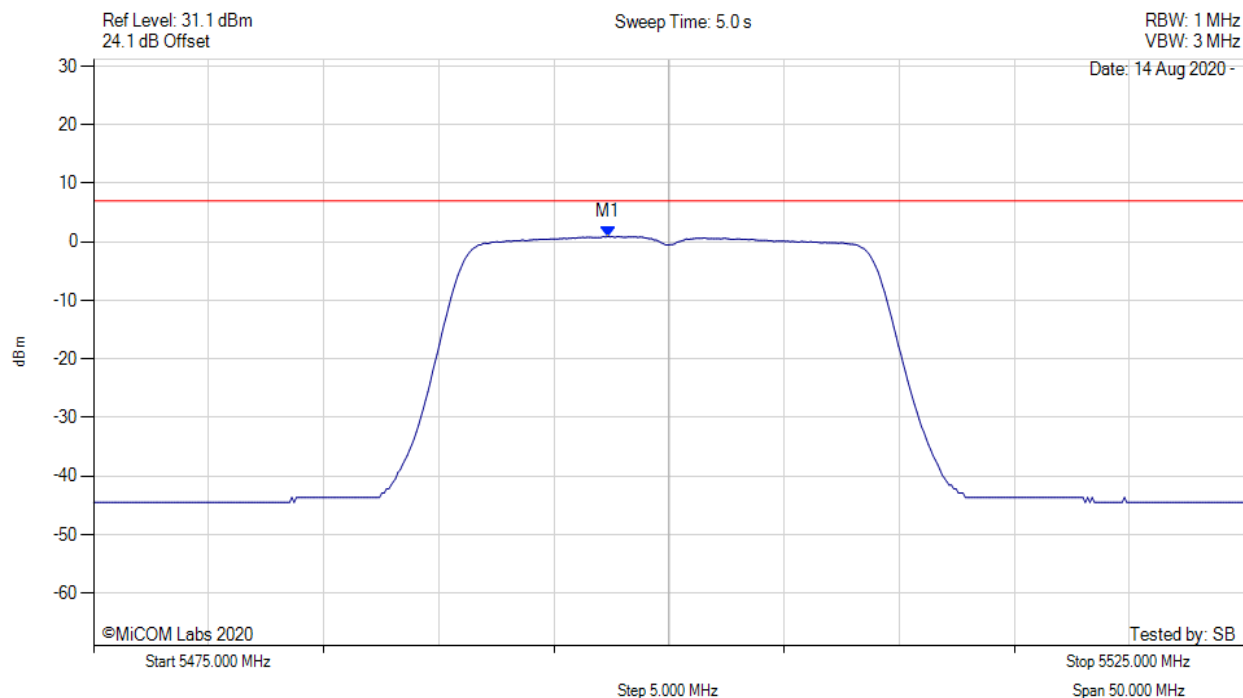


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.345 MHz : 0.930 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

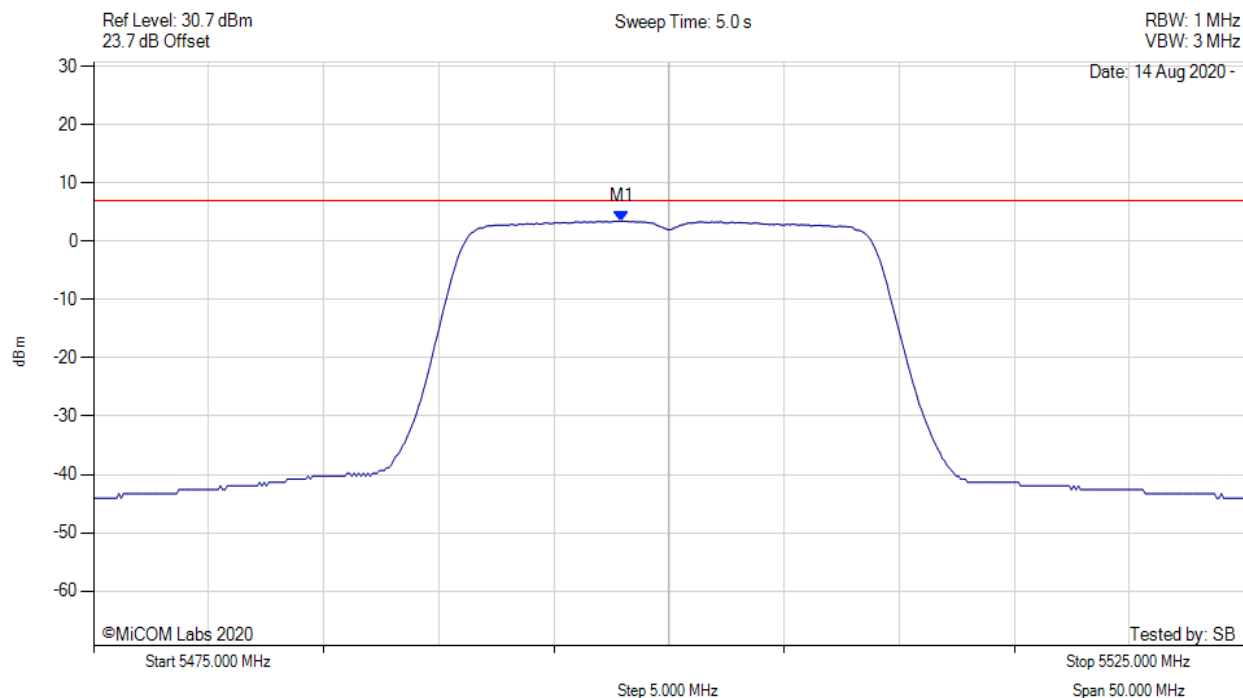


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.946 MHz : 3.464 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

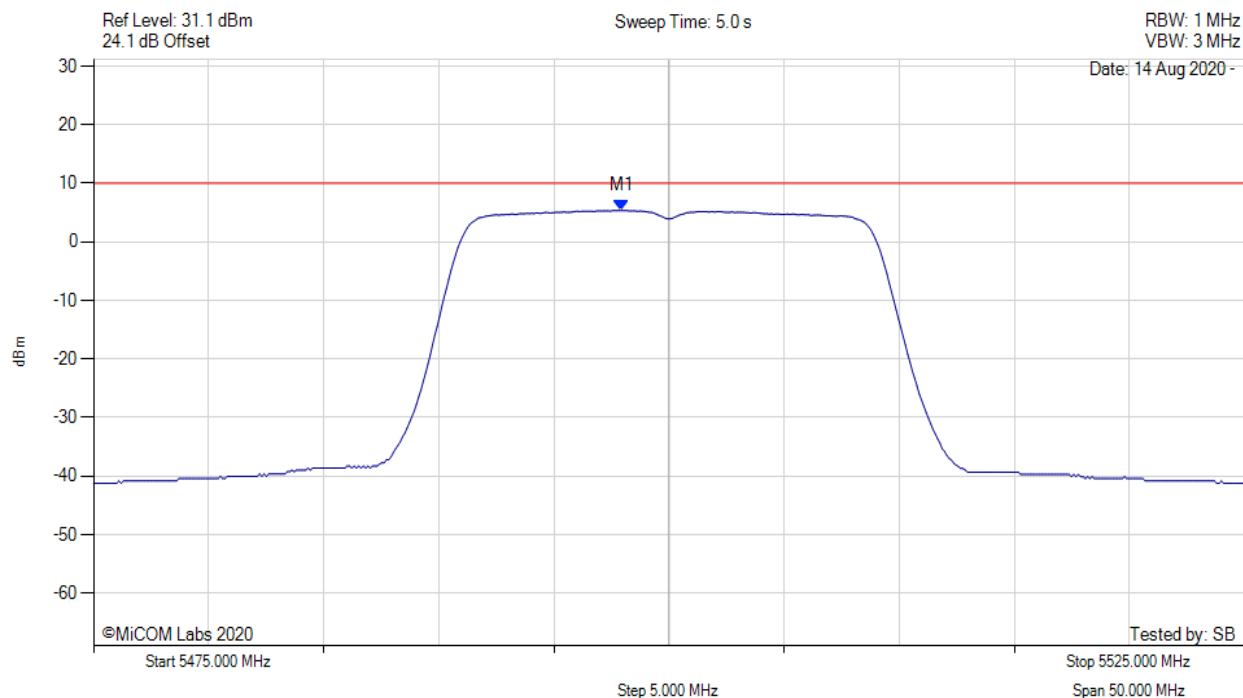


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.900 MHz : 5.358 dBm M1 + DCCF : 5497.900 MHz : 5.446 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -4.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

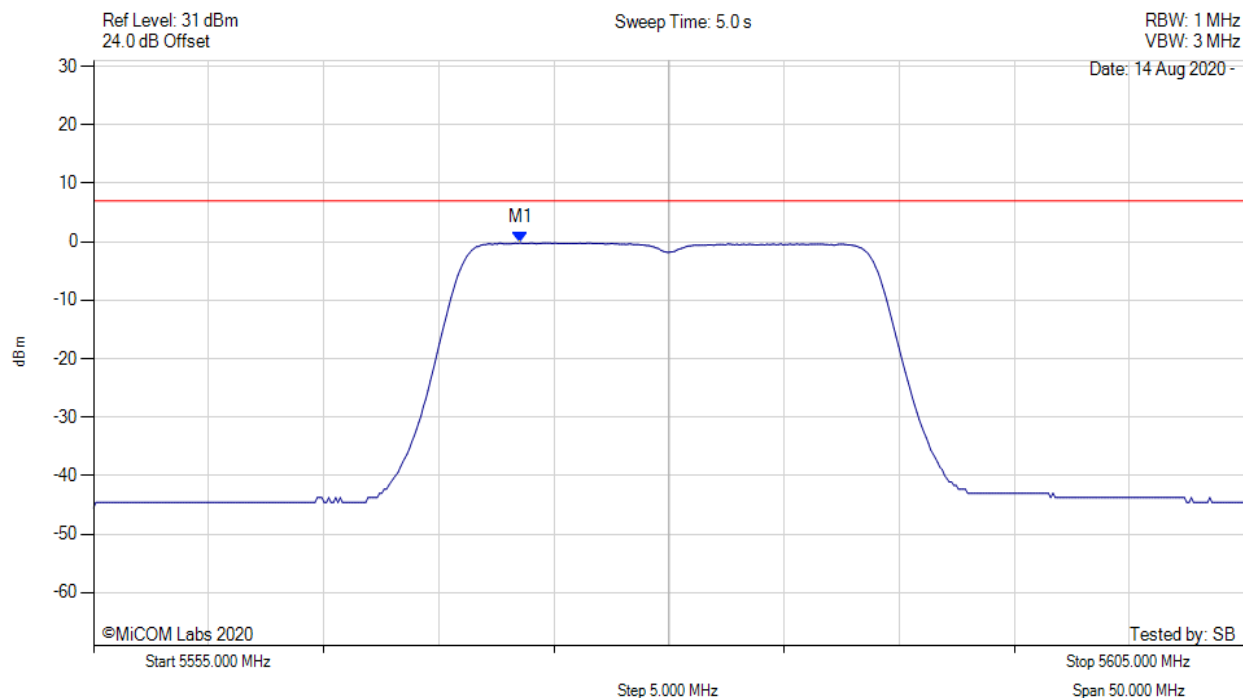


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5573.537 MHz : -0.200 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

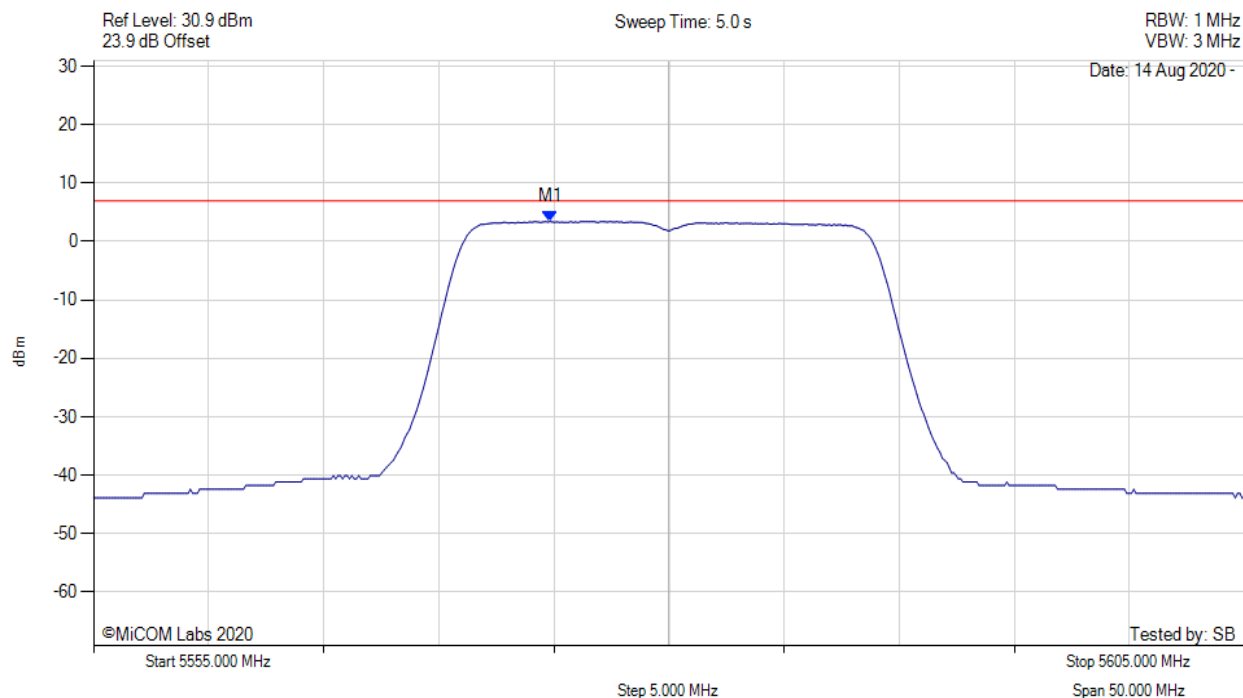


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5574.840 MHz : 3.445 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

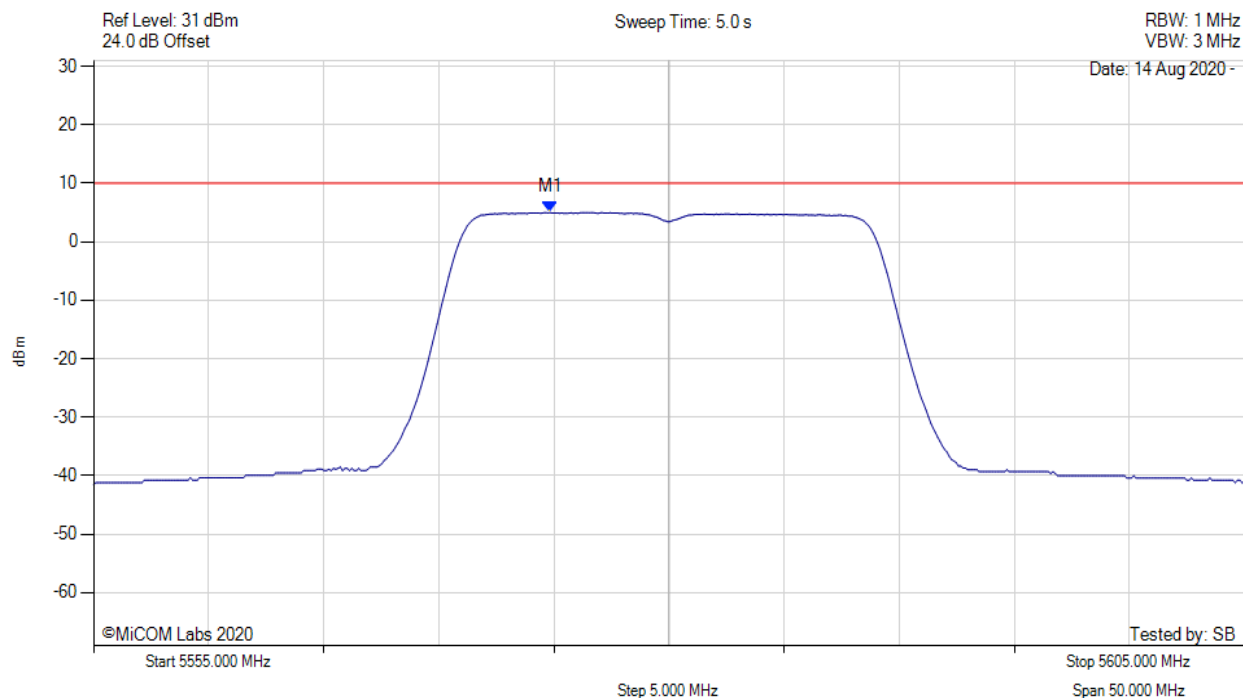


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5574.800 MHz : 4.993 dBm M1 + DCCF : 5574.800 MHz : 5.081 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -4.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

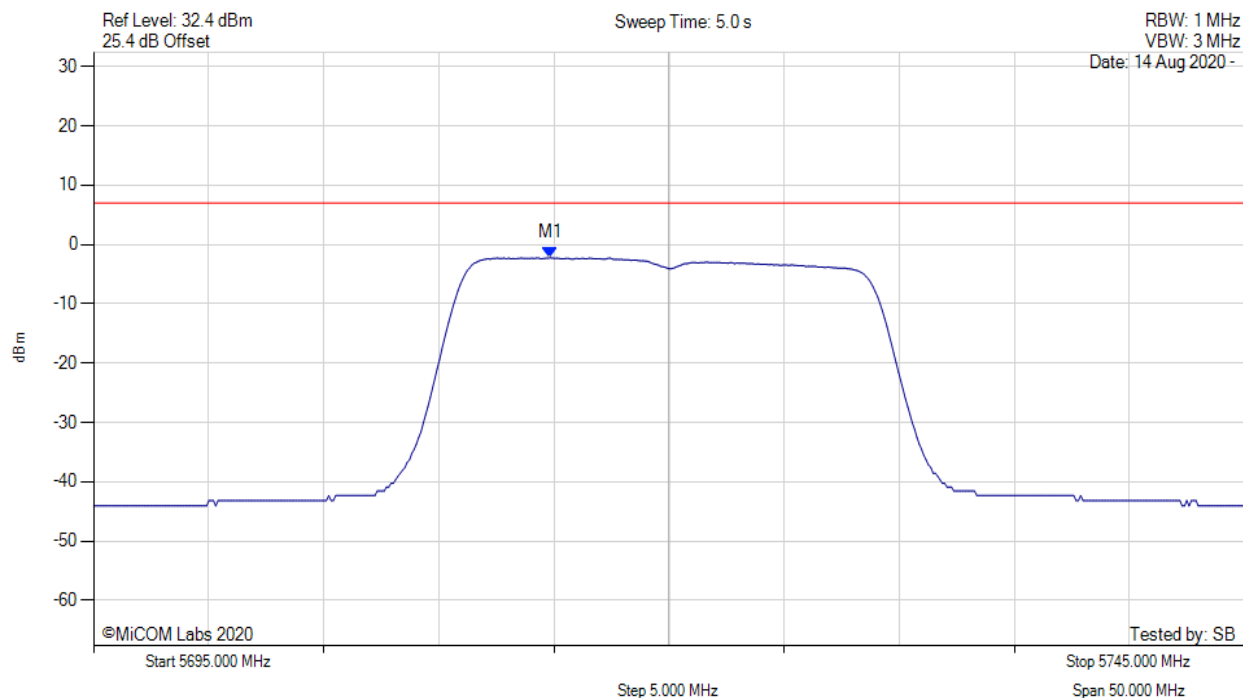


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.840 MHz : -2.235 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

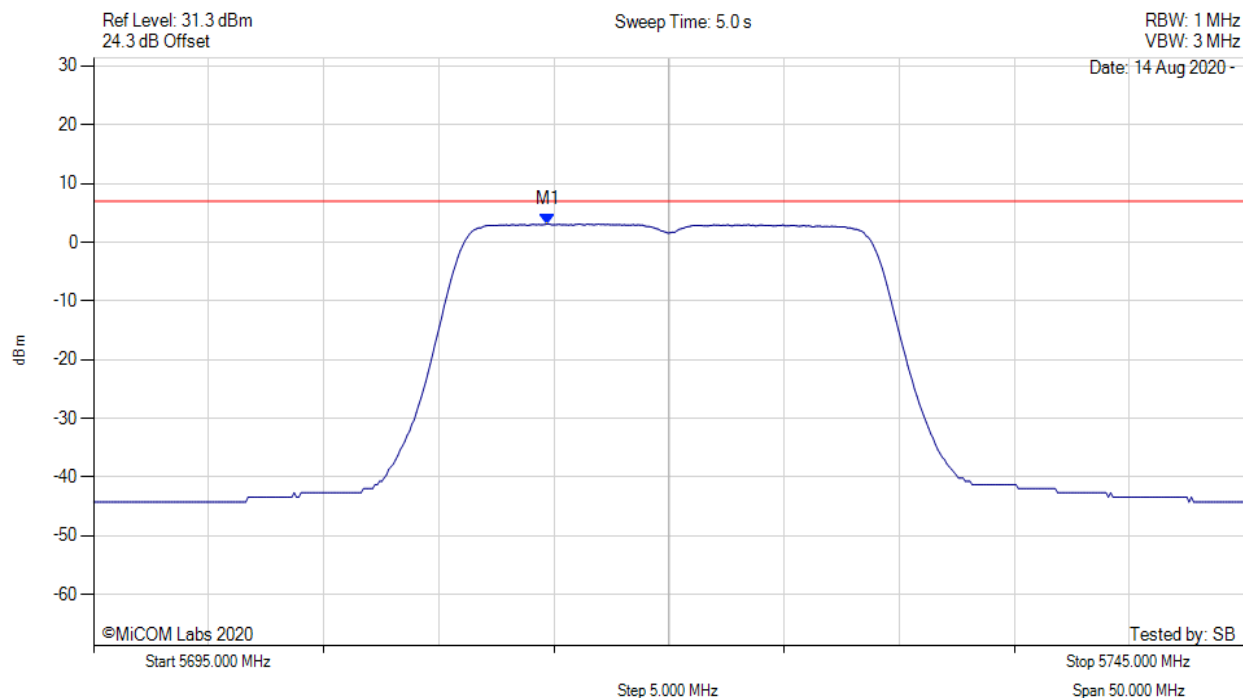


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.739 MHz : 3.108 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

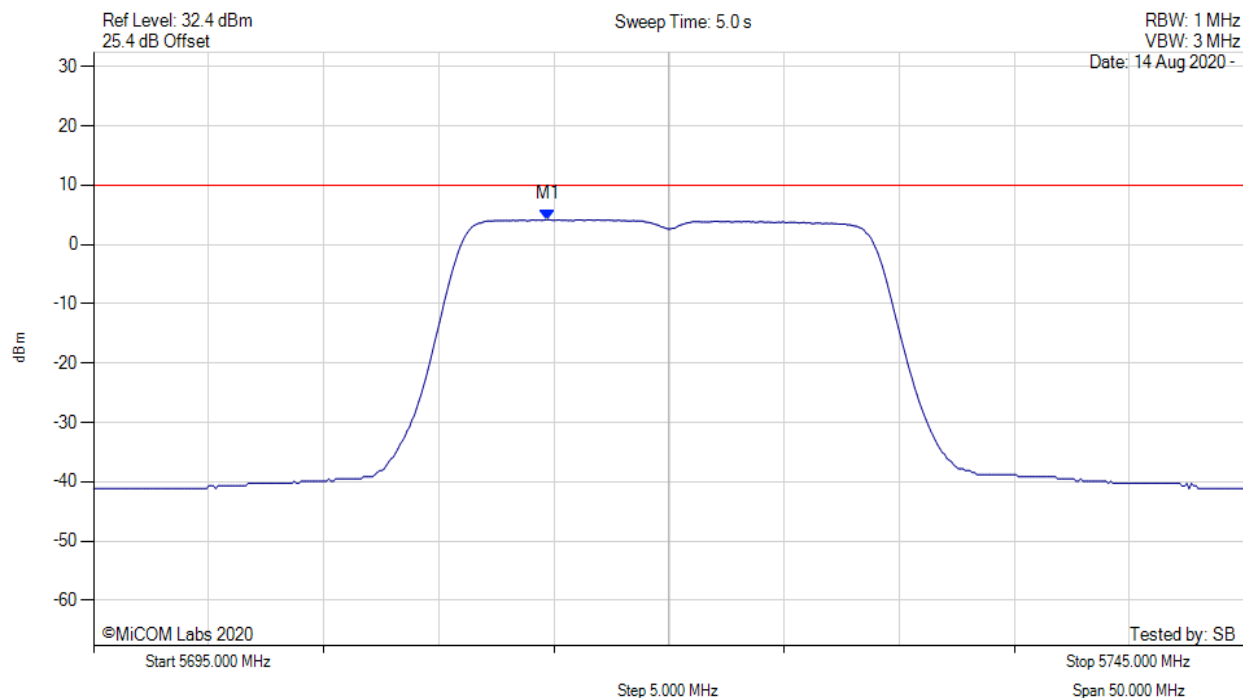


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.700 MHz : 4.204 dBm M1 + DCCF : 5714.700 MHz : 4.292 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ 10.0 dBm Margin: -5.7 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

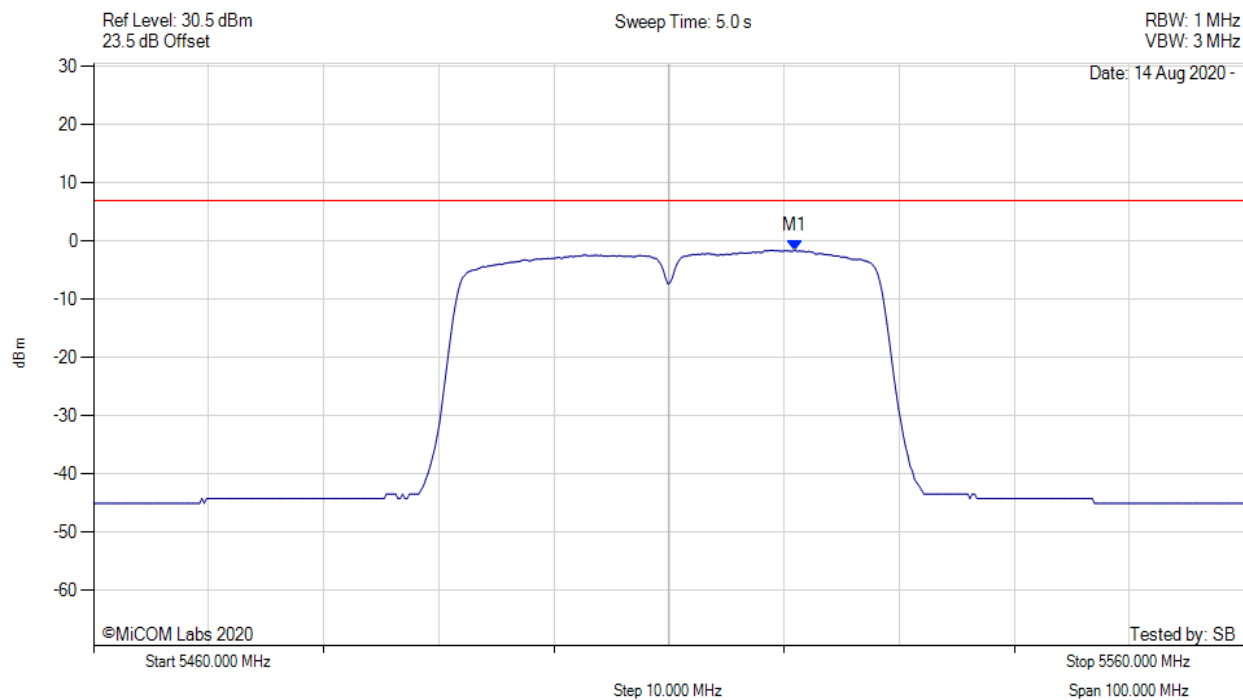


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5520.922 MHz : -1.578 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

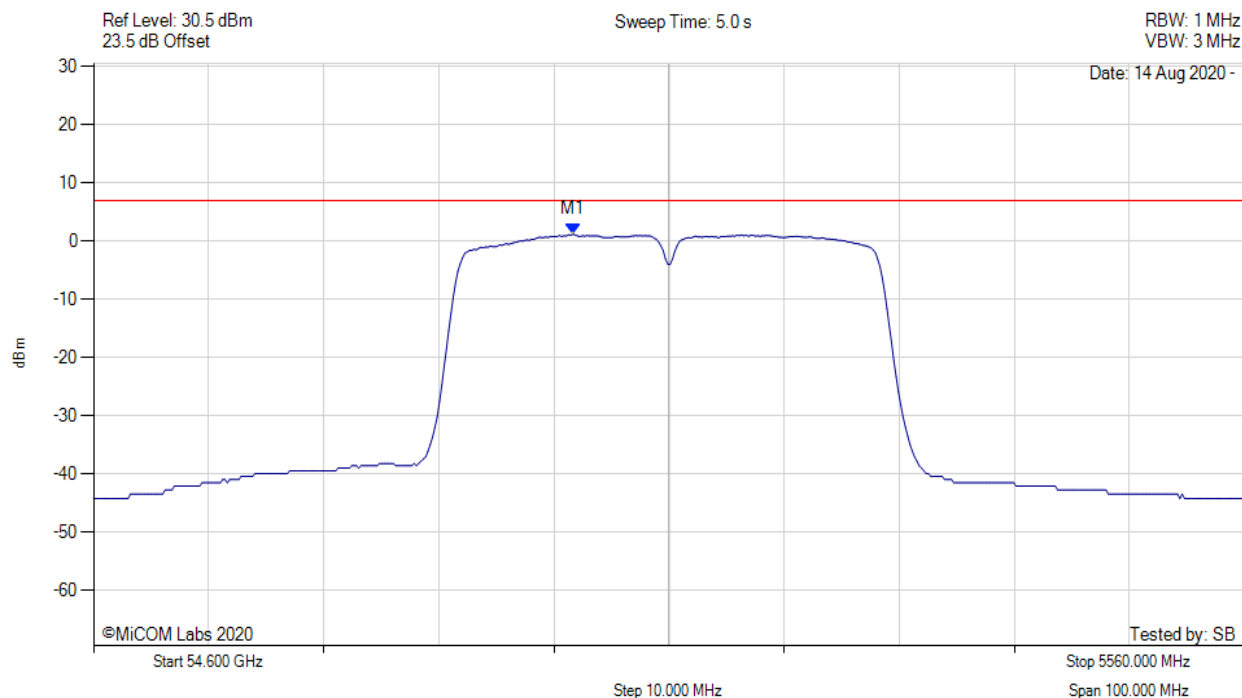


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5501.683 MHz : 1.199 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

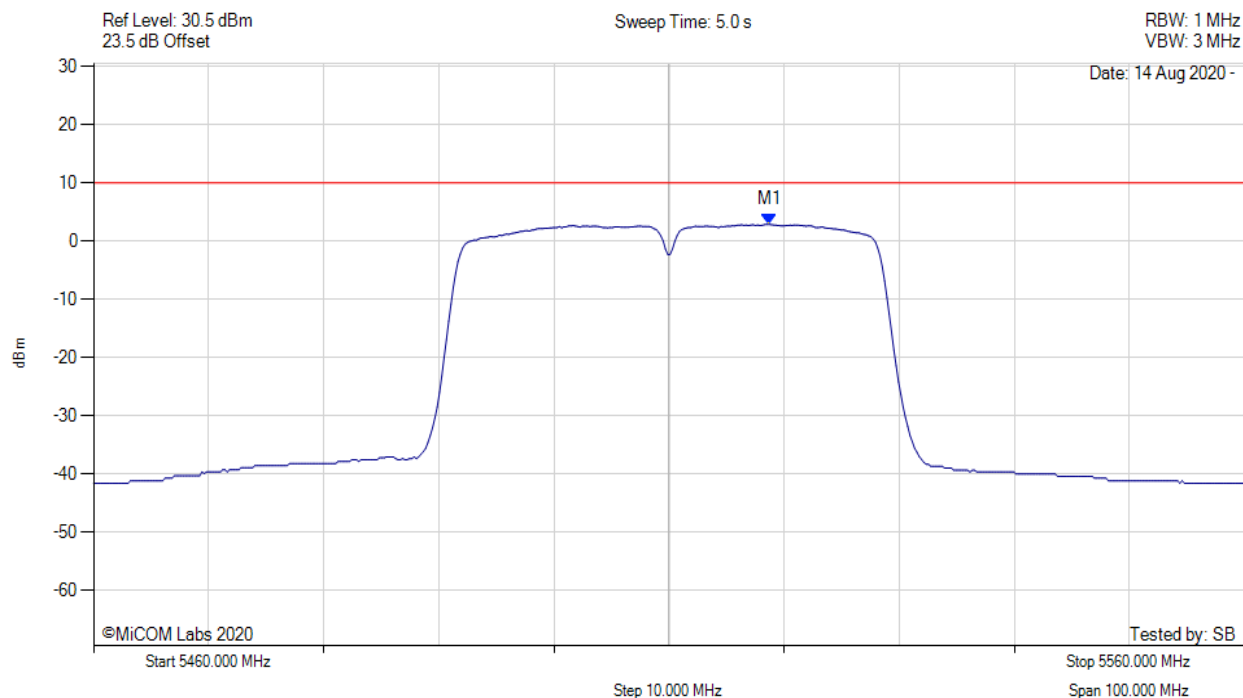


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5518.700 MHz : 2.862 dBm M1 + DCCF : 5518.700 MHz : 3.177 dBm Duty Cycle Correction Factor : +0.32 dB	Limit: ≤ 10.0 dBm Margin: -6.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

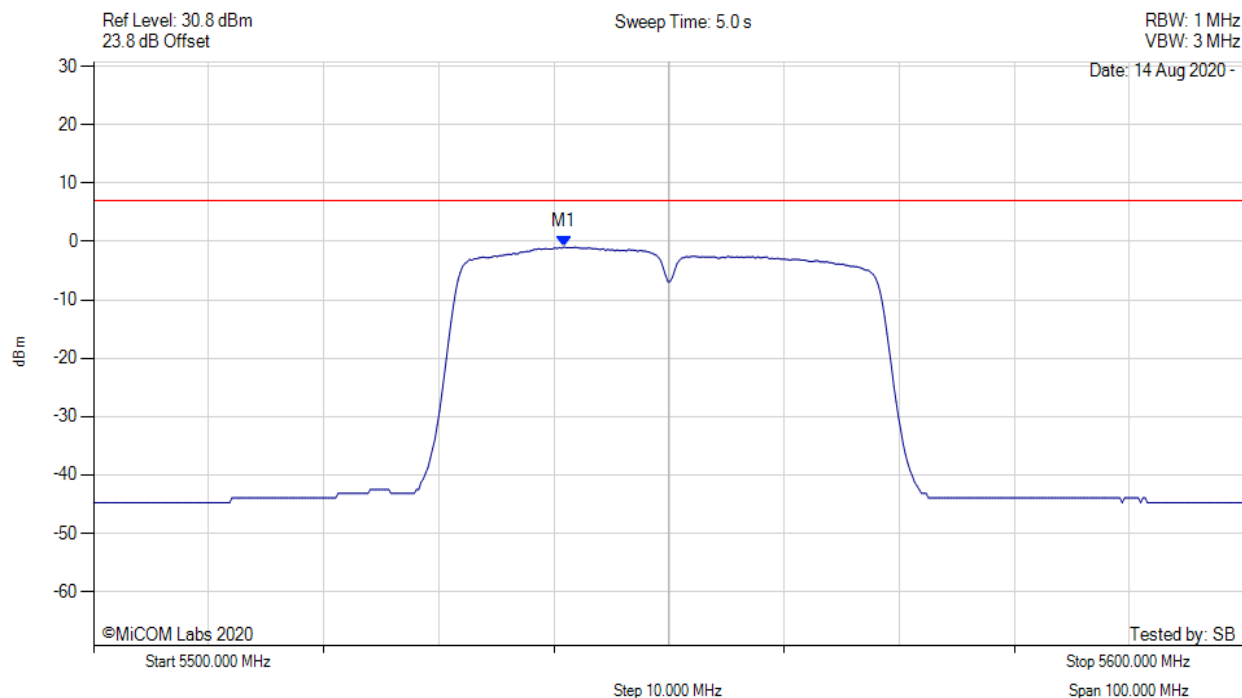


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5540.882 MHz : -0.942 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

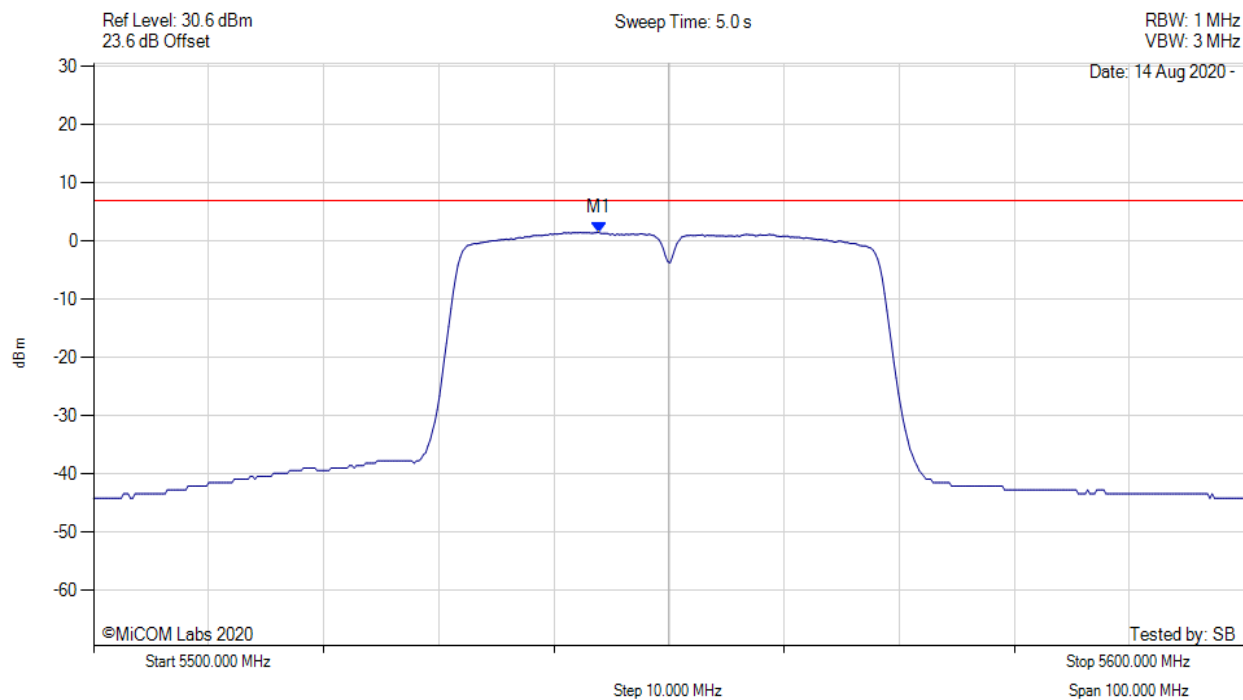


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5543.888 MHz : 1.524 dBm	Channel Frequency: 5550.00 MHz

[back to matrix](#)



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

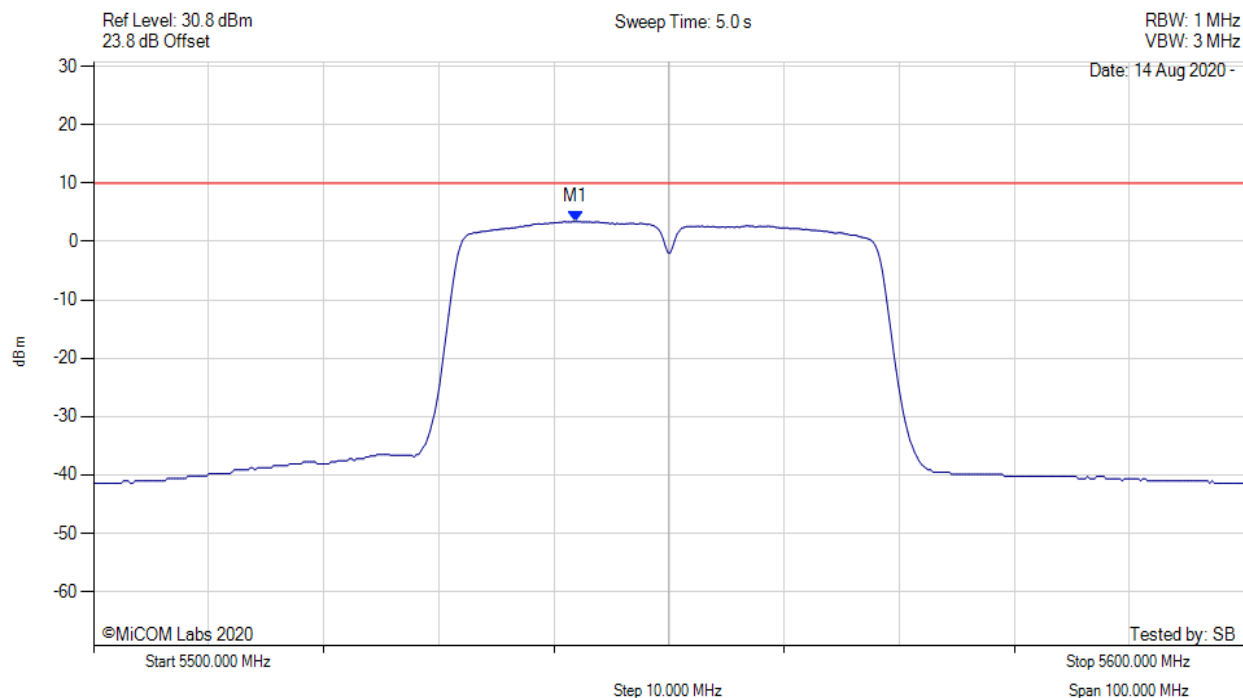


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5541.900 MHz : 3.423 dBm M1 + DCCF : 5541.900 MHz : 3.738 dBm Duty Cycle Correction Factor : +0.32 dB	Limit: ≤ 10.0 dBm Margin: -6.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

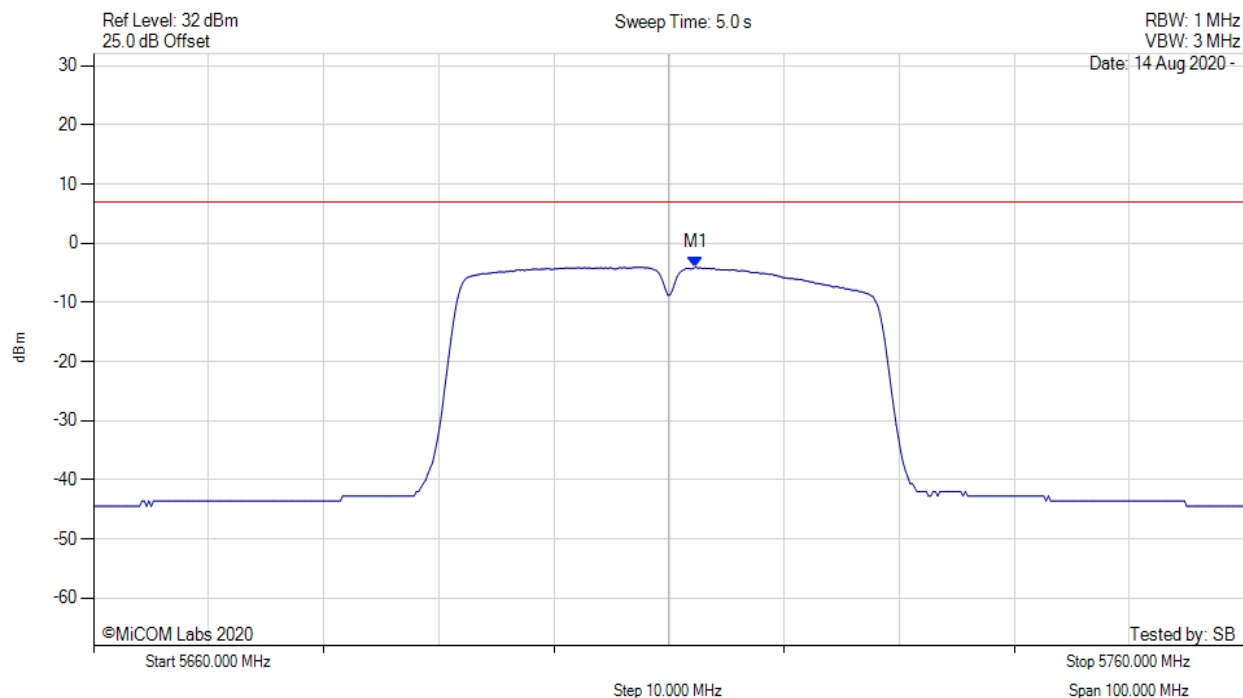


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5712.305 MHz : -4.038 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

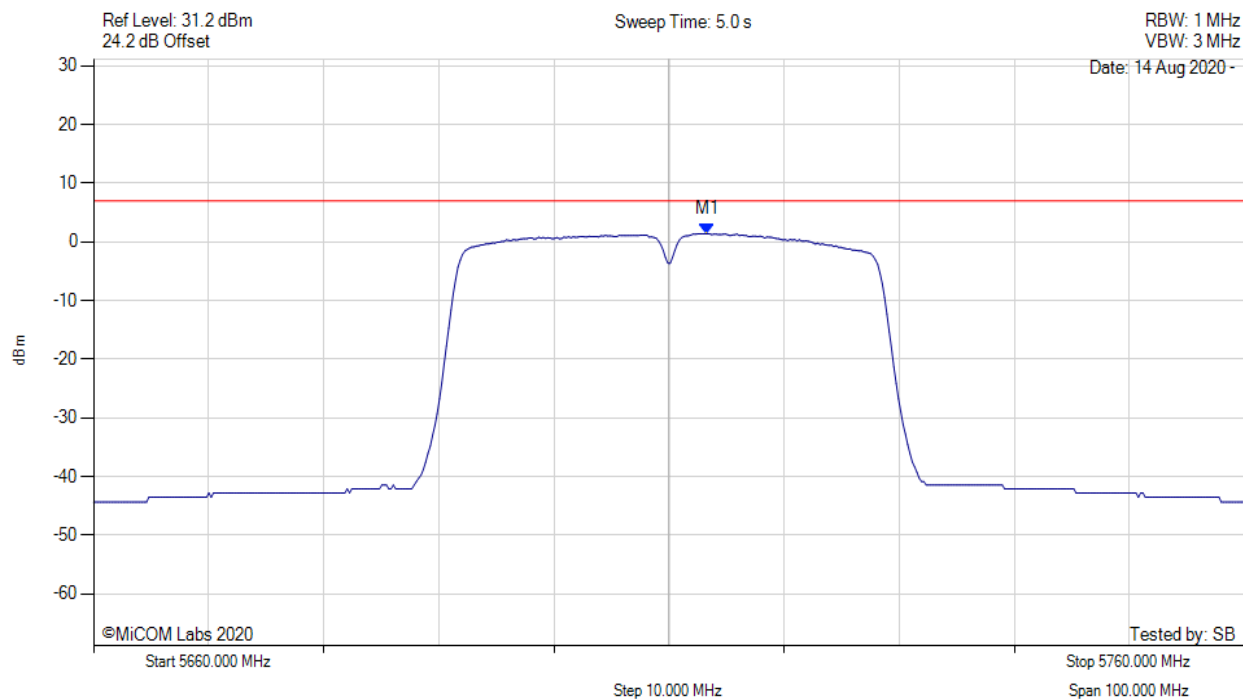


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5713.307 MHz : 1.409 dBm	Limit: ≤ 6.990 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

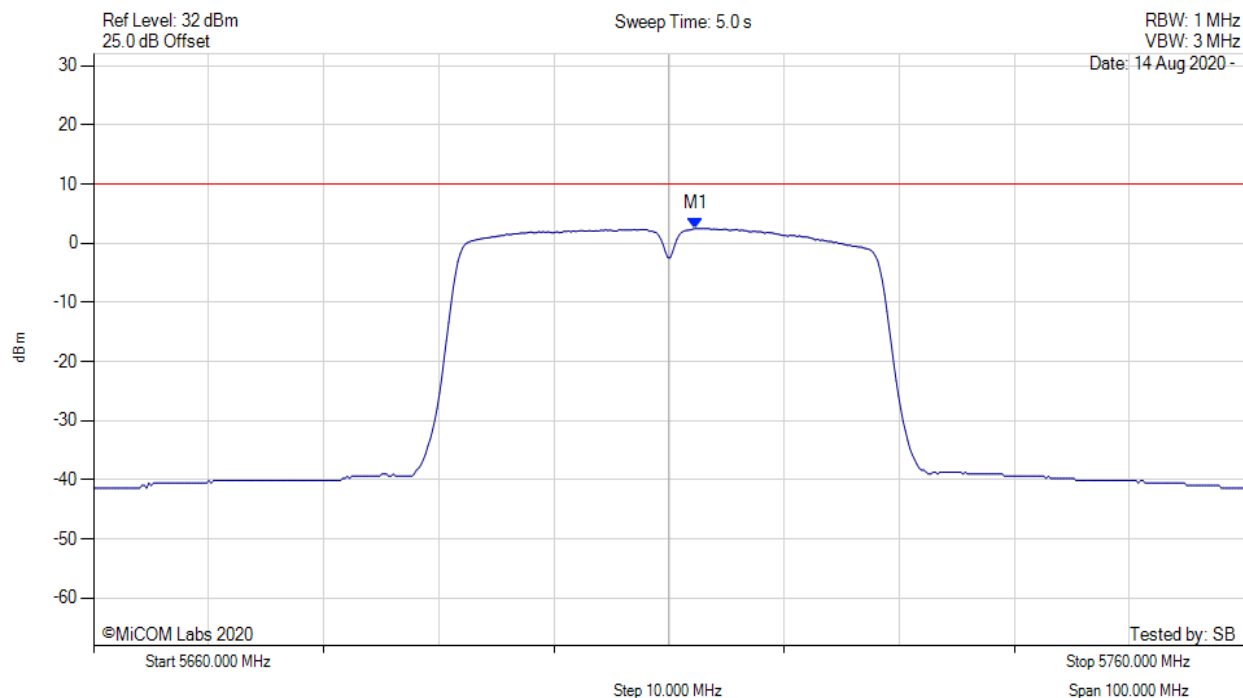

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5712.300 MHz : 2.446 dBm M1 + DCCF : 5712.300 MHz : 2.761 dBm Duty Cycle Correction Factor : +0.32 dB	Limit: ≤ 10.0 dBm Margin: -7.2 dB


[back to matrix](#)

19 dBi Antenna (For ISSED RSS 247 Limits)



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

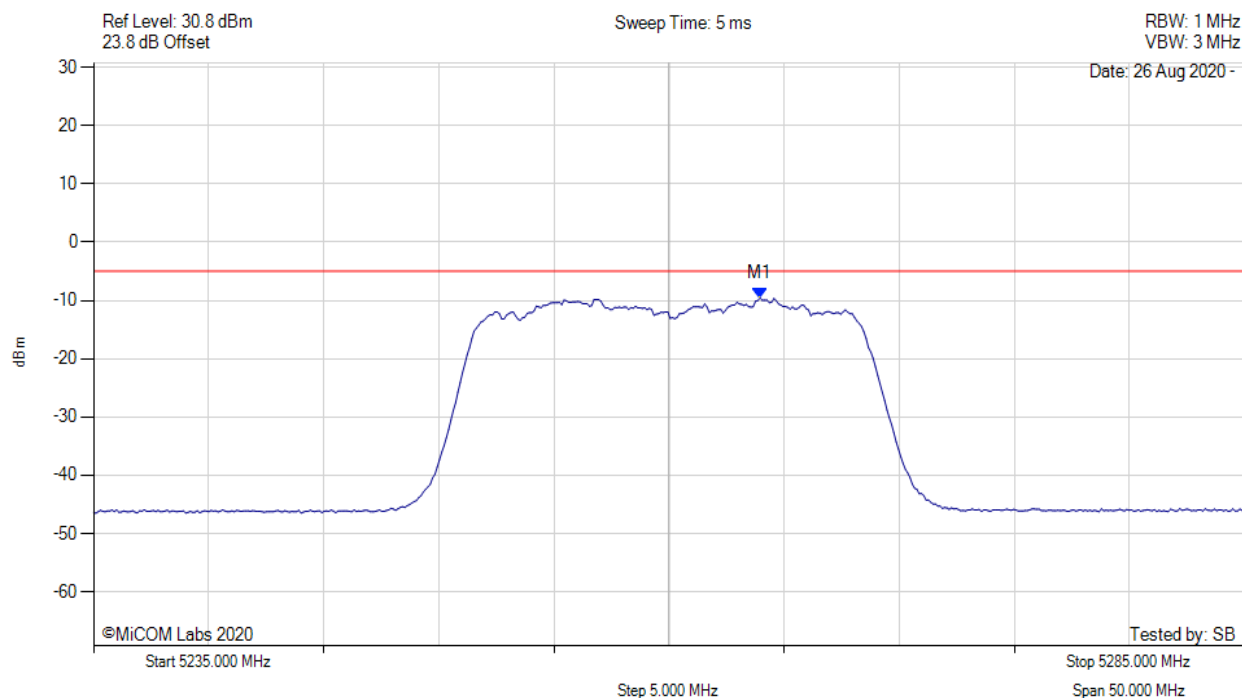


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.958 MHz : -9.583 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

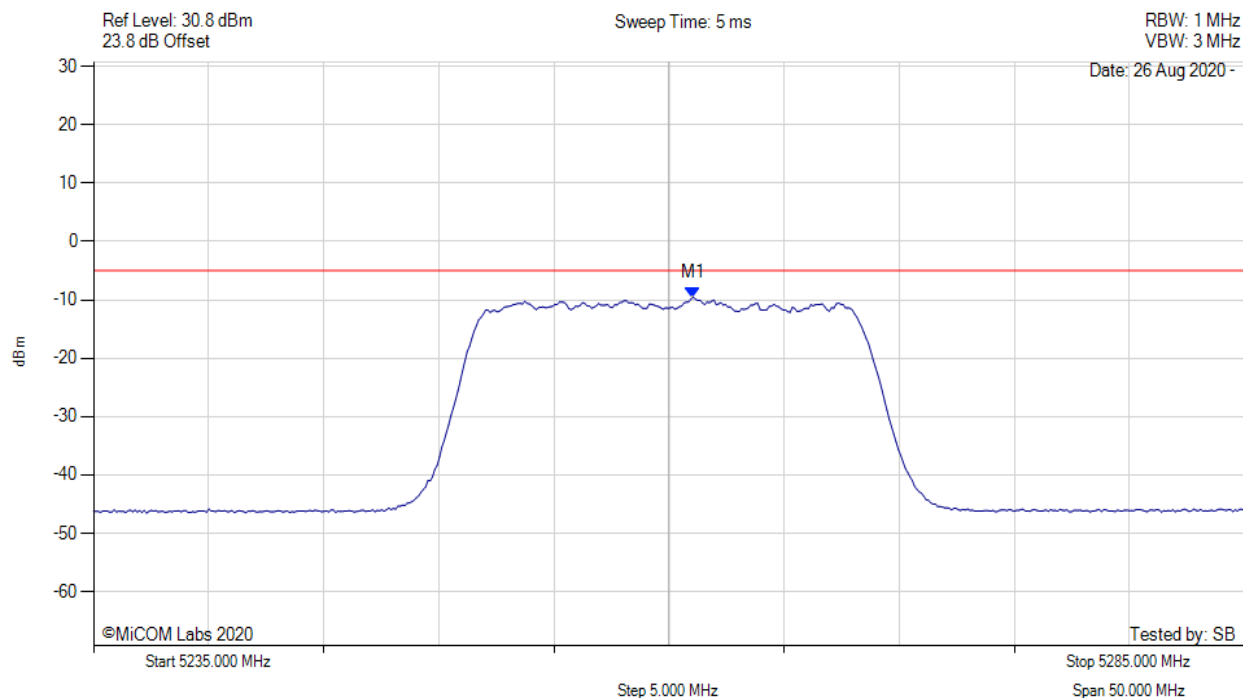


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5261.052 MHz : -9.582 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

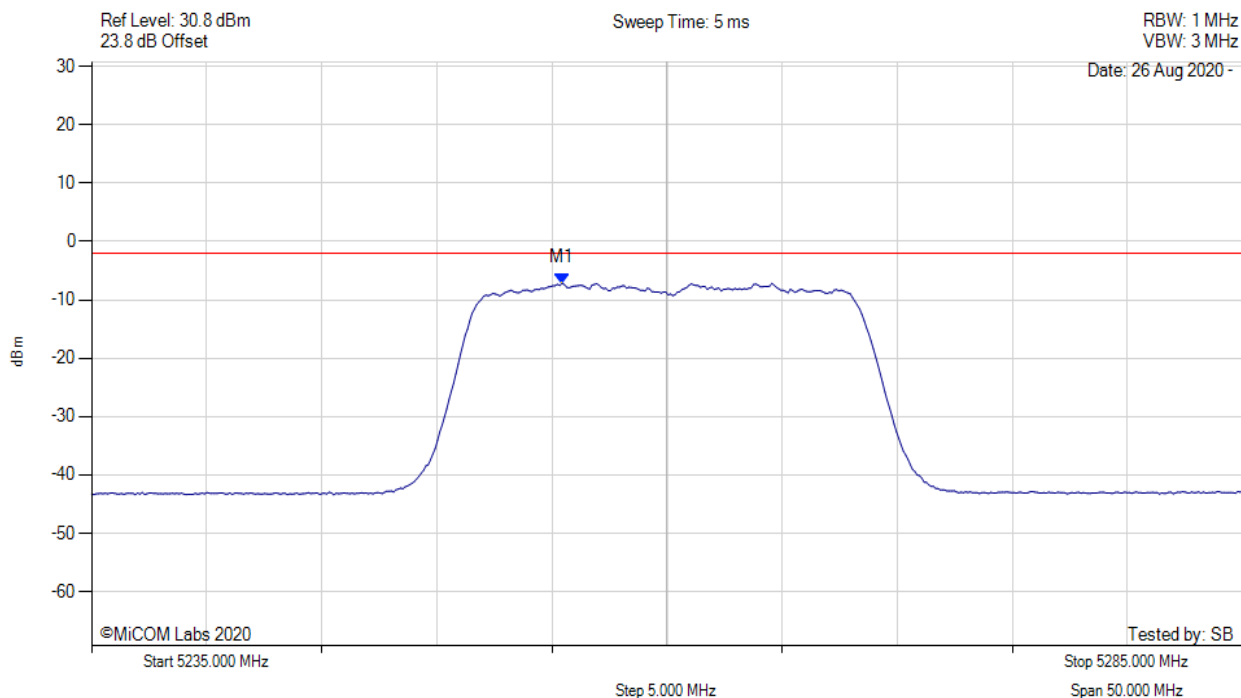


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5255.400 MHz : -7.166 dBm M1 + DCCF : 5255.400 MHz : -7.122 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ -2.0 dBm Margin: -5.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

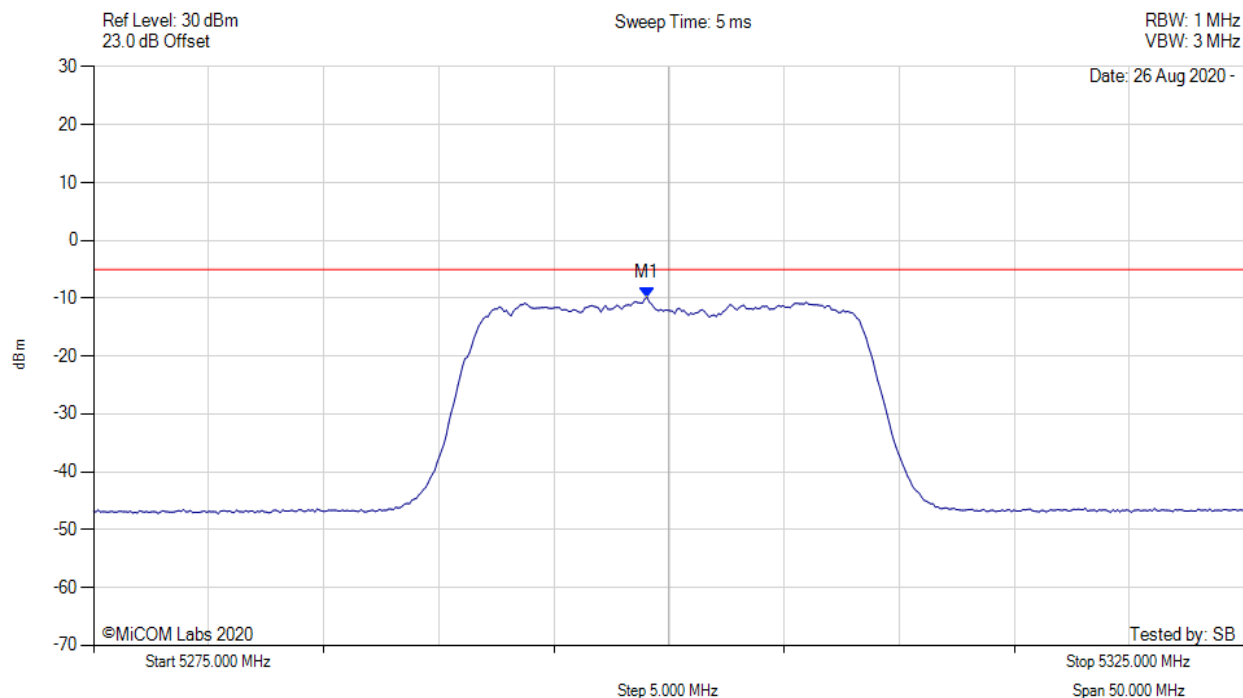


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5299.048 MHz : -9.847 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

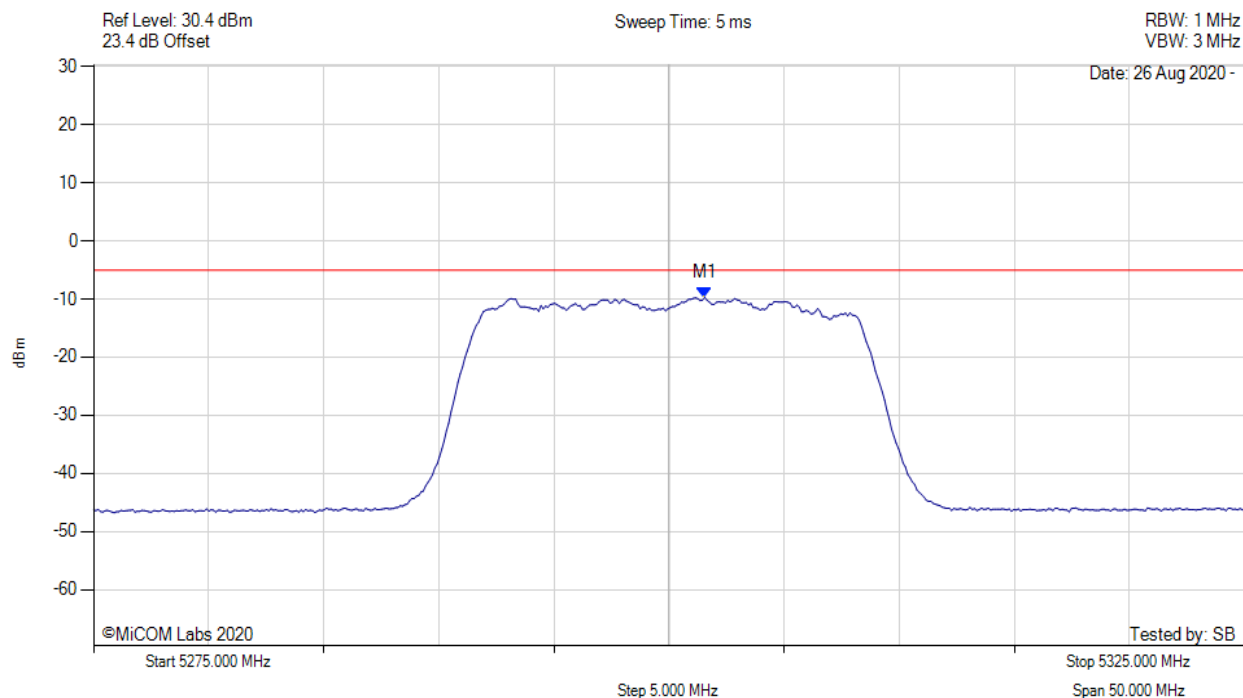


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.553 MHz : -9.704 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

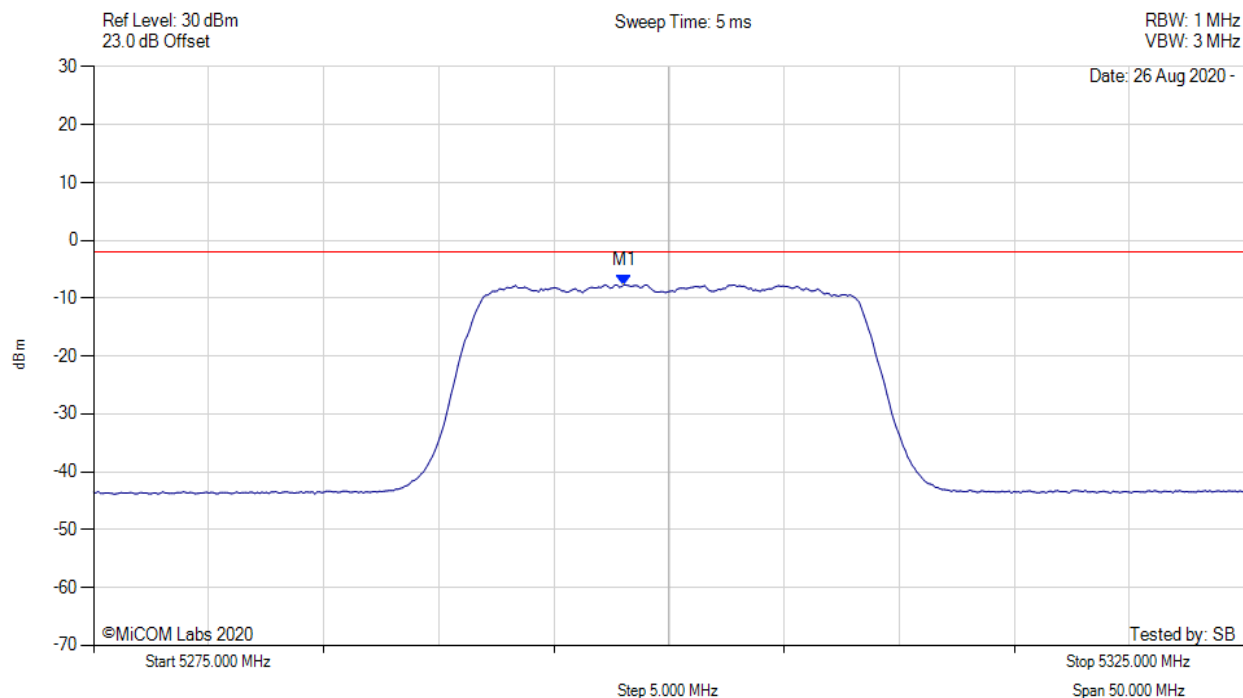


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5298.000 MHz : -7.669 dBm M1 + DCCF : 5298.000 MHz : -7.625 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ -2.0 dBm Margin: -5.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

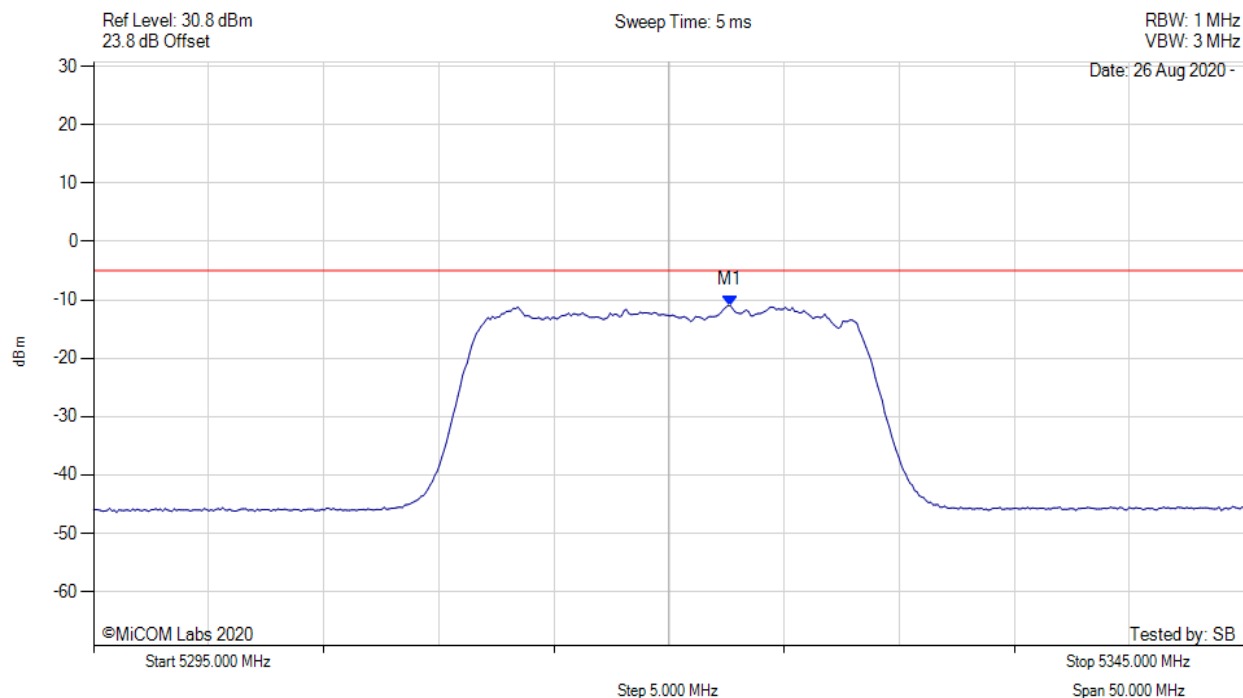


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.655 MHz : -10.976 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

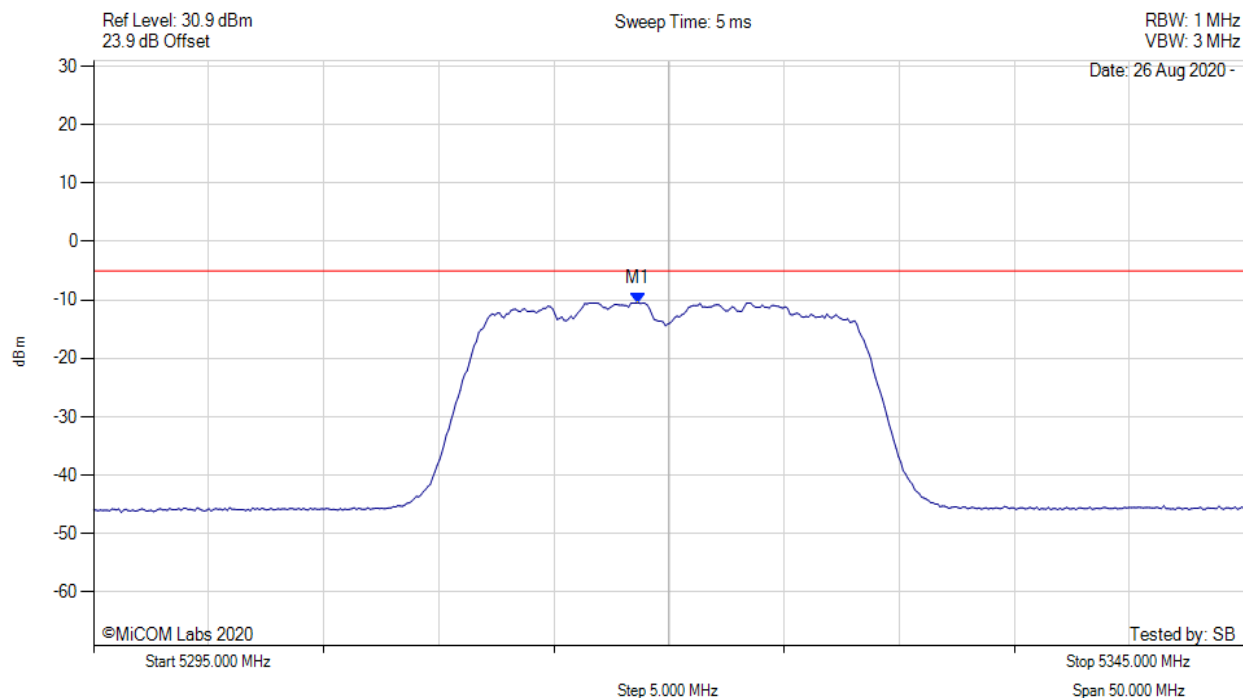


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5318.647 MHz : -10.475 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

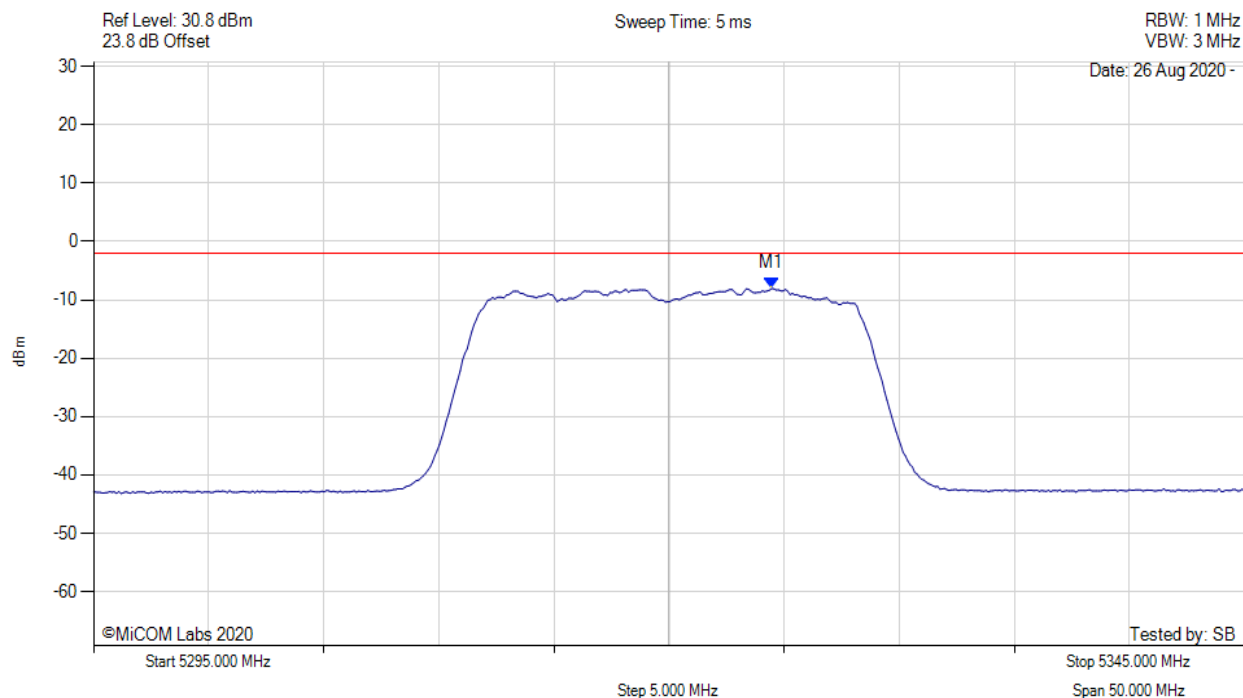


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5324.500 MHz : -8.068 dBm M1 + DCCF : 5324.500 MHz : -8.024 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ -2.0 dBm Margin: -6.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

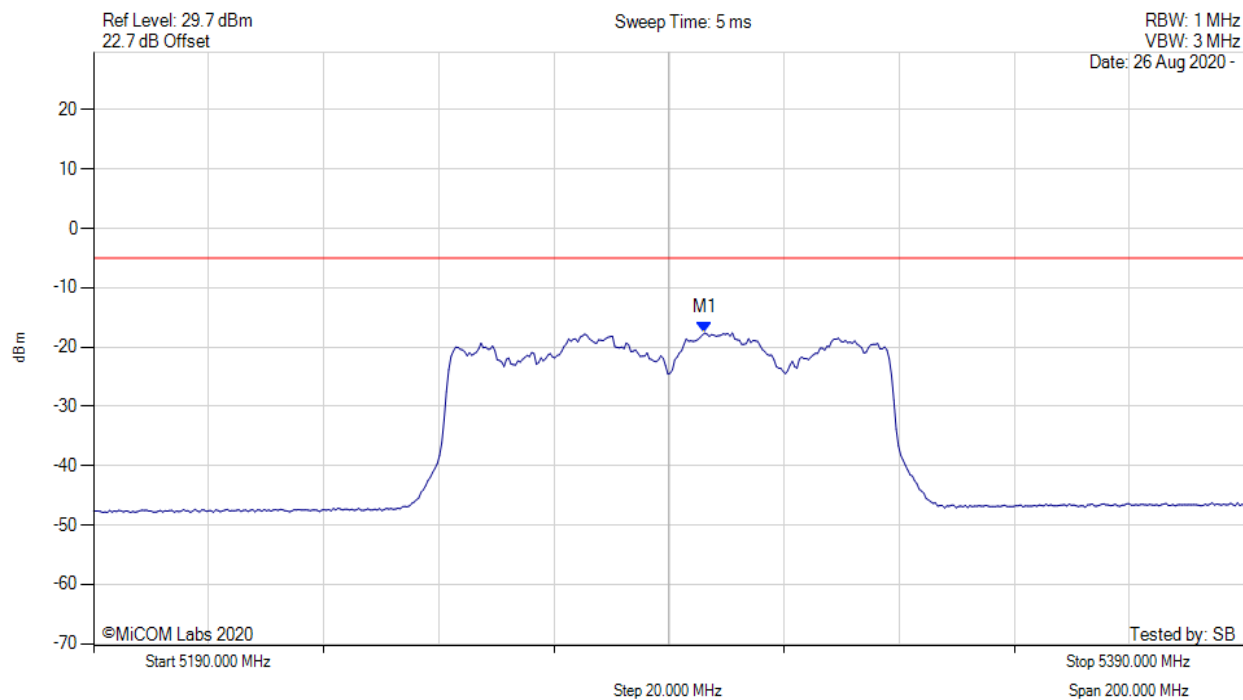


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5296.212 MHz : -17.613 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

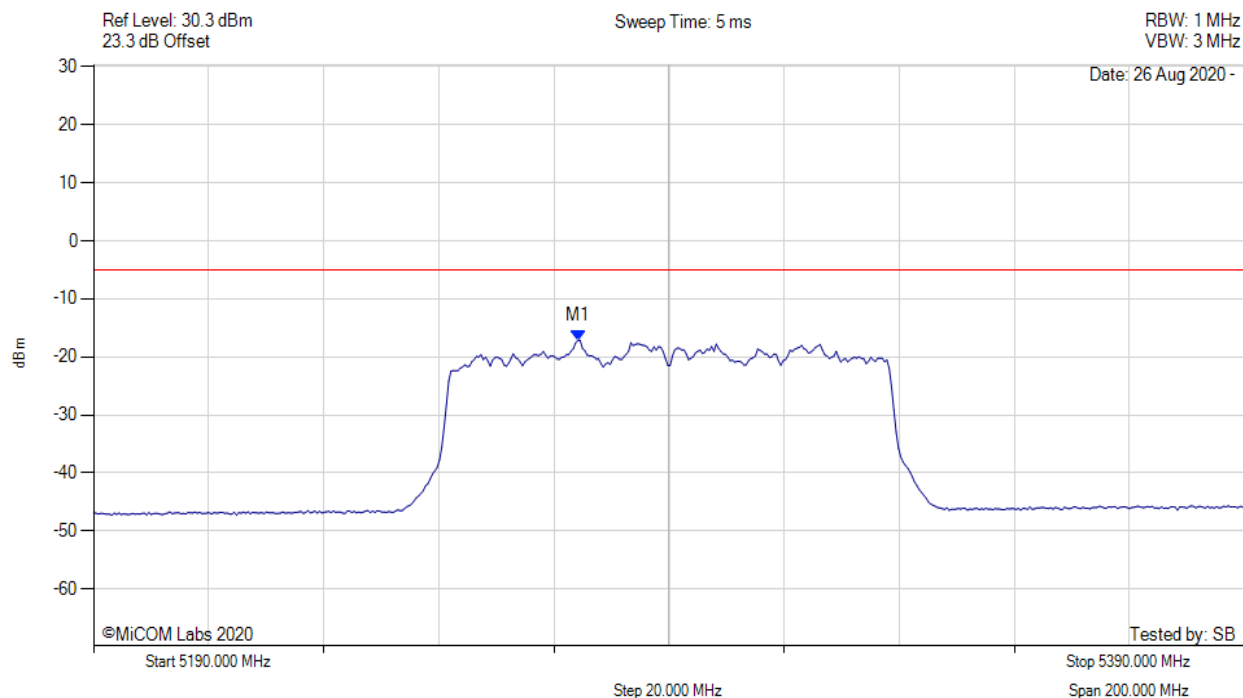


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5274.168 MHz : -17.128 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

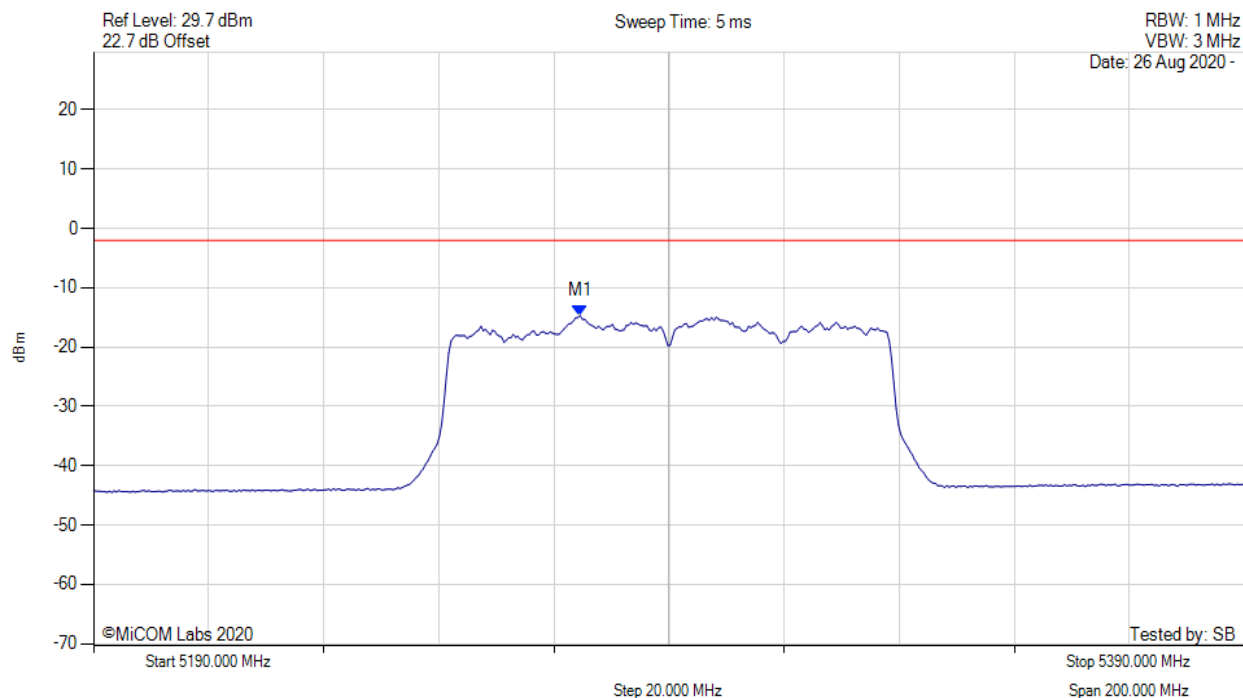


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5274.600 MHz : -14.693 dBm M1 + DCCF : 5274.600 MHz : -13.831 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ -2.0 dBm Margin: -11.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

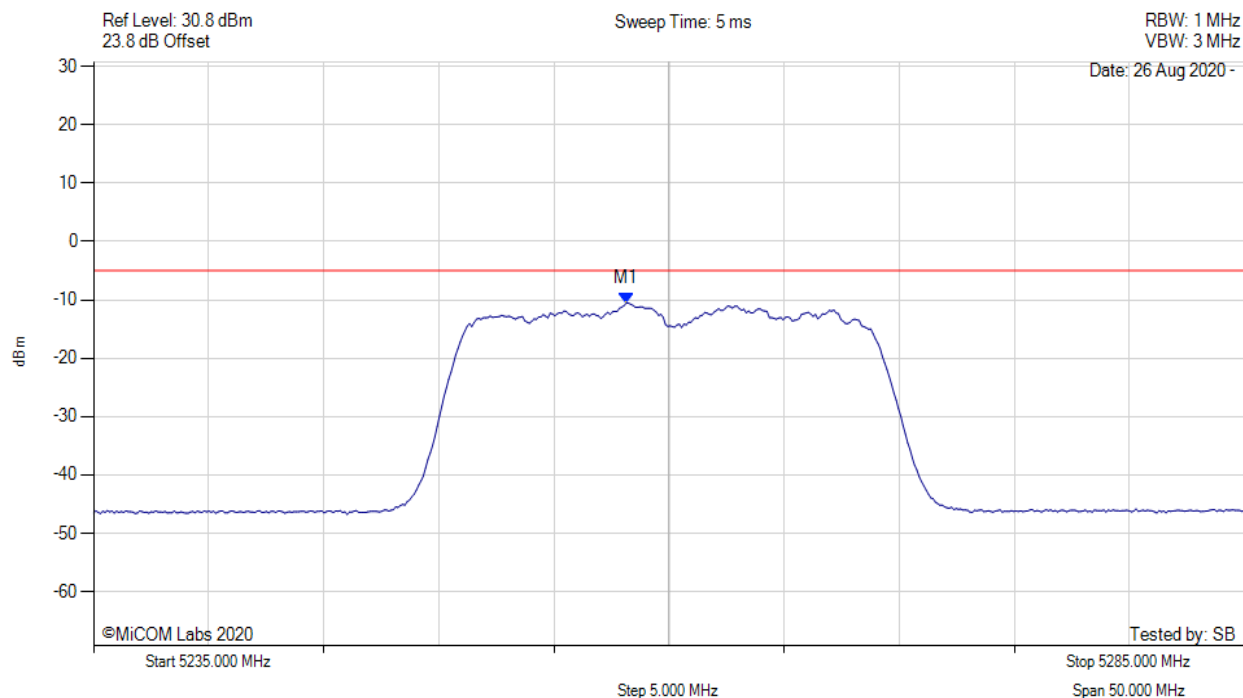


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5258.146 MHz : -10.586 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

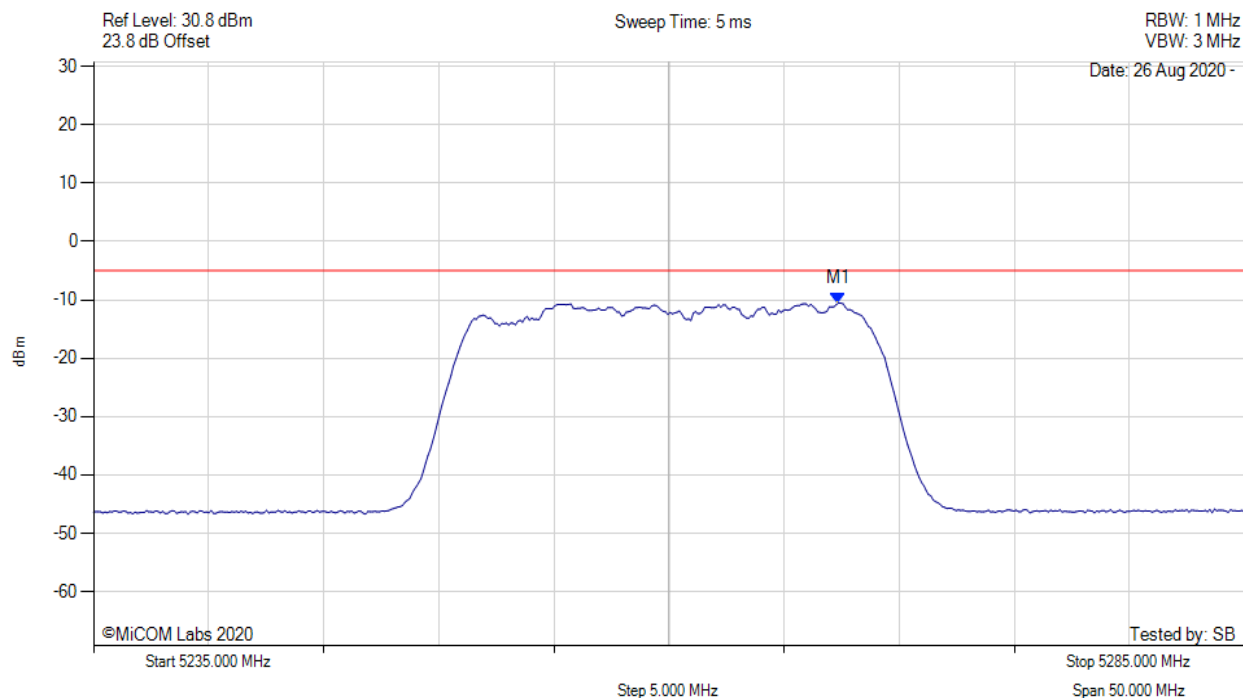


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5267.365 MHz : -10.531 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

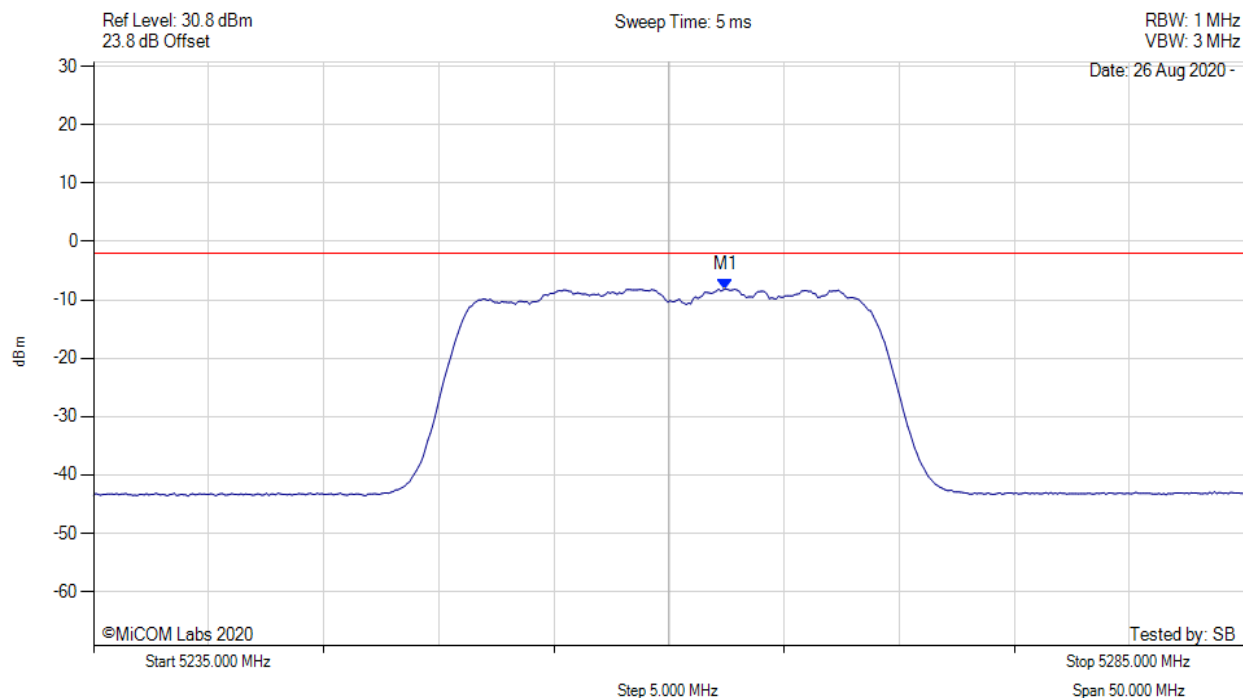


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.500 MHz : -8.133 dBm M1 + DCCF : 5262.500 MHz : -8.045 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -6.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

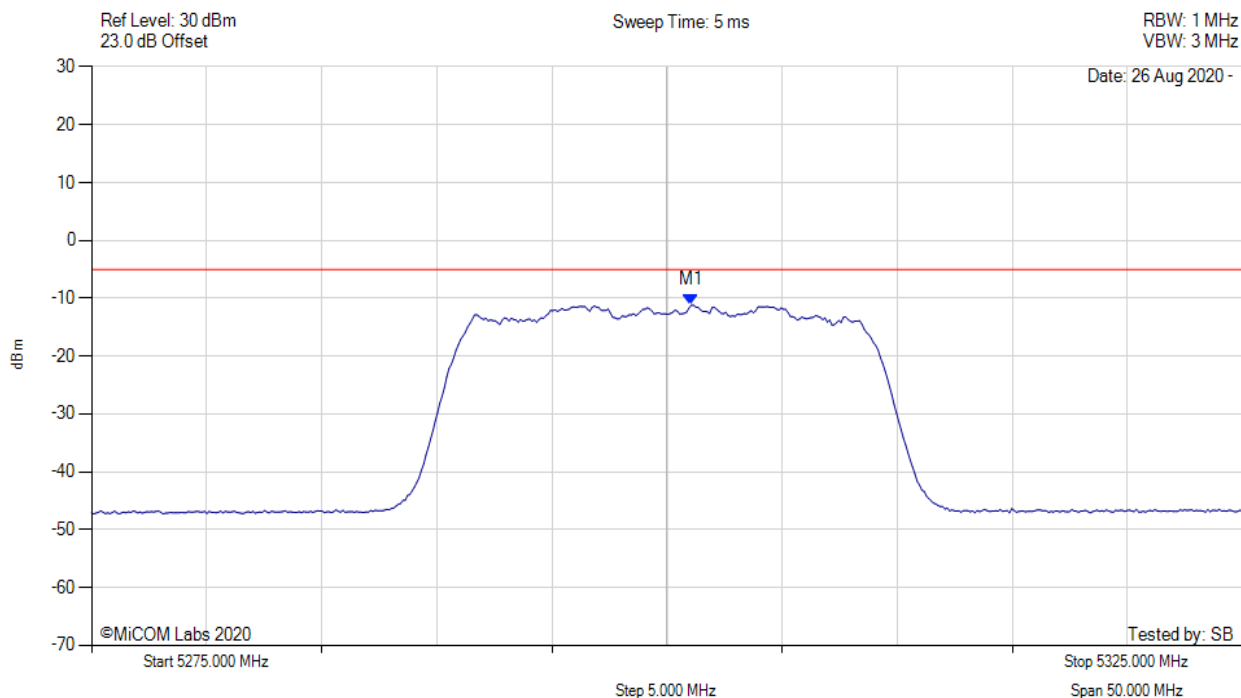


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.052 MHz : -11.187 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

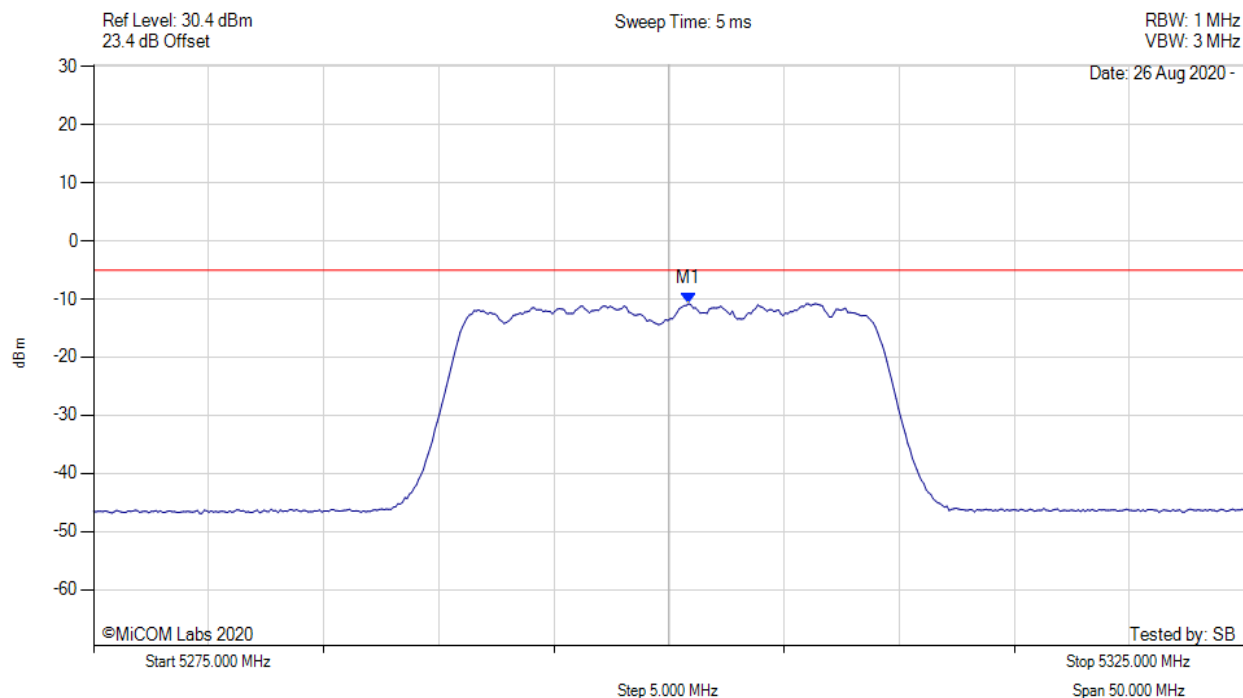


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5300.852 MHz : -10.798 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

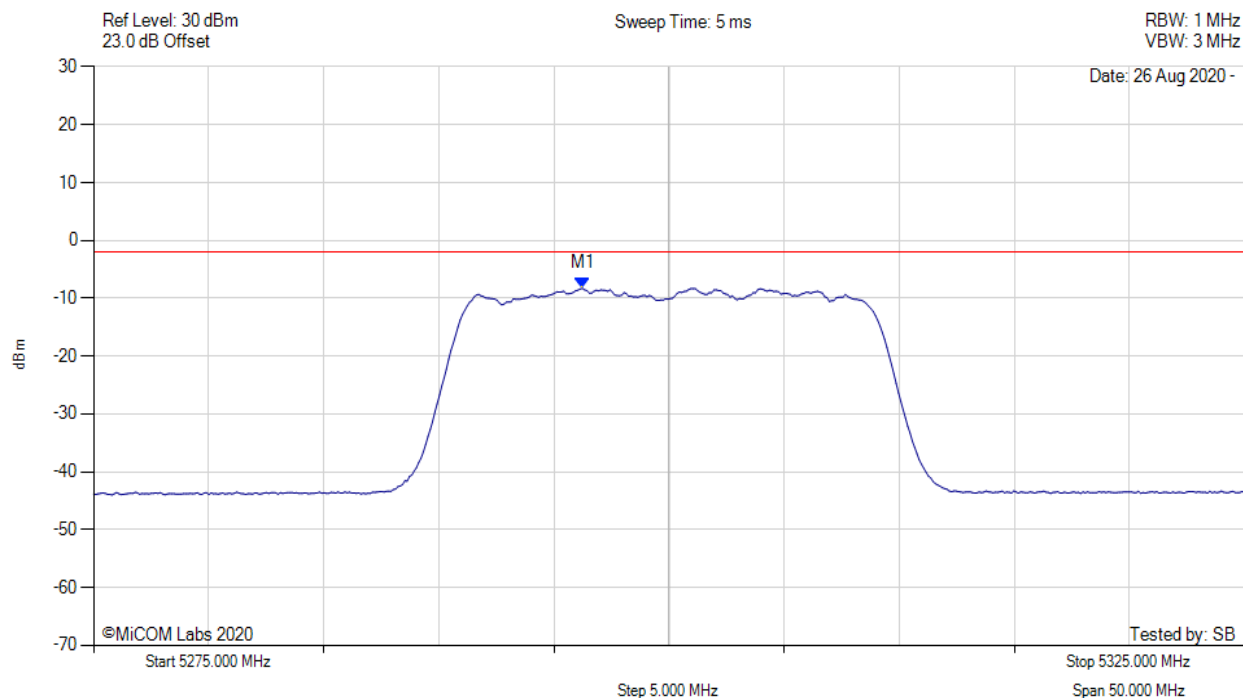


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5296.200 MHz : -8.281 dBm M1 + DCCF : 5296.200 MHz : -8.193 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -6.2 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

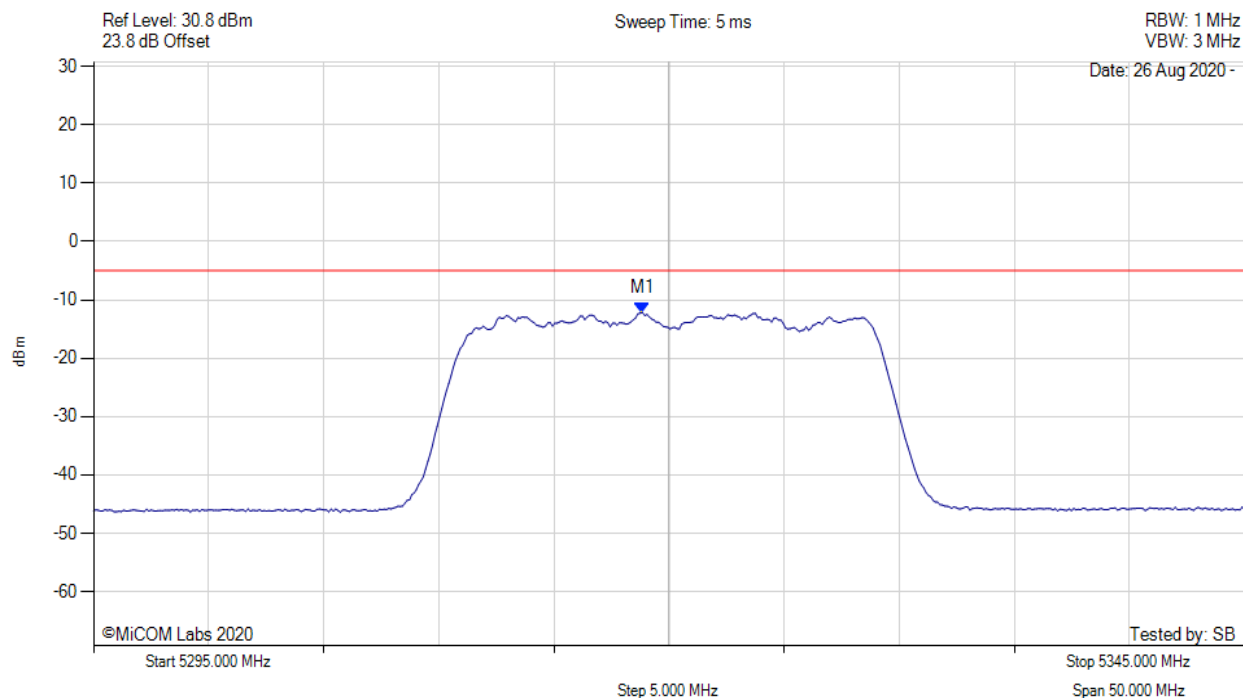


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5318.848 MHz : -12.188 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

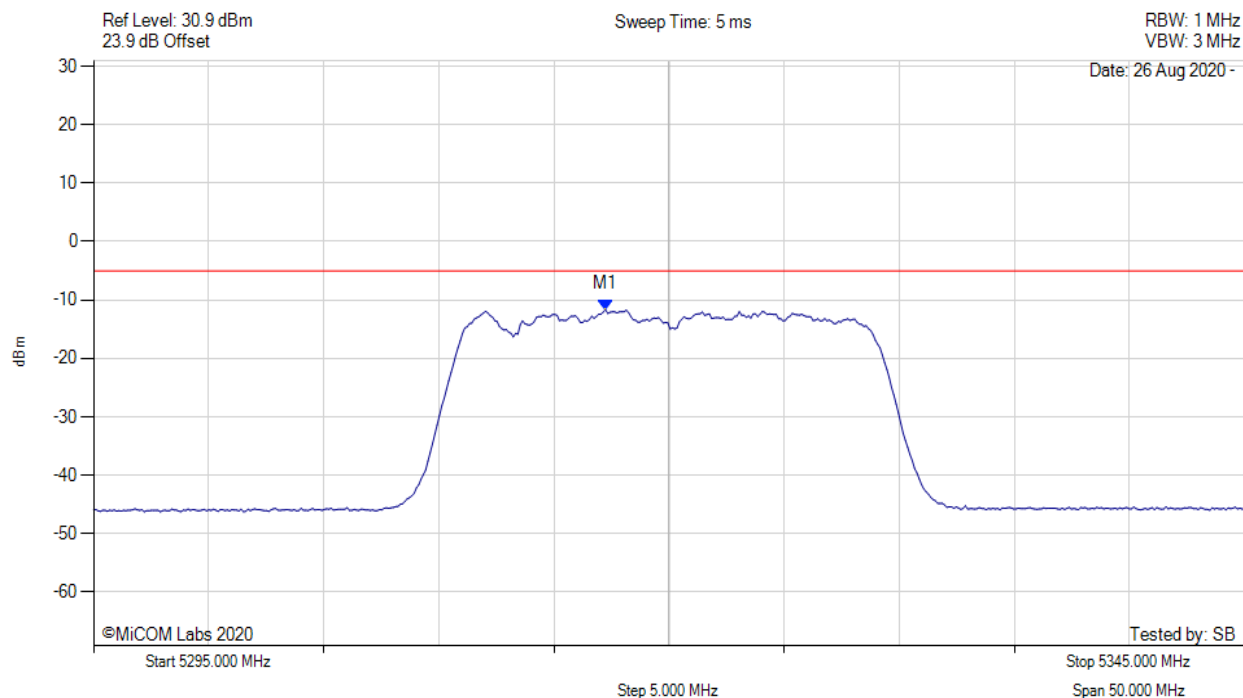


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.244 MHz : -11.643 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

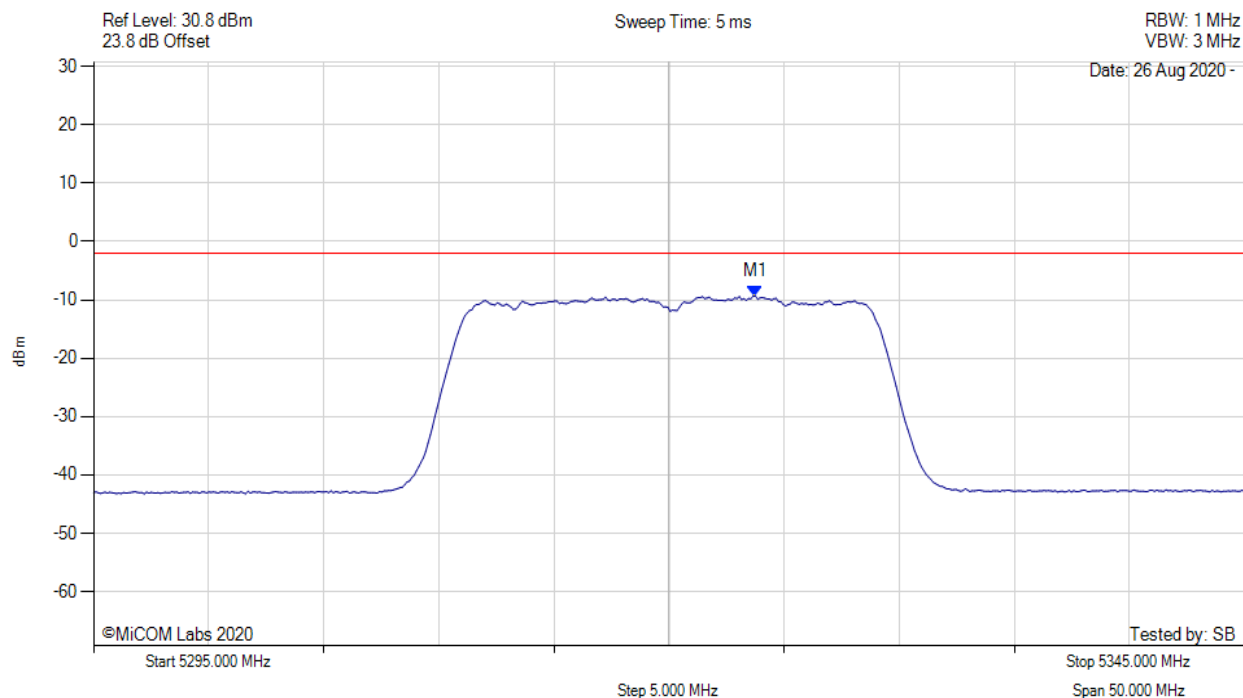


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.800 MHz : -9.345 dBm M1 + DCCF : 5323.800 MHz : -9.257 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -7.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

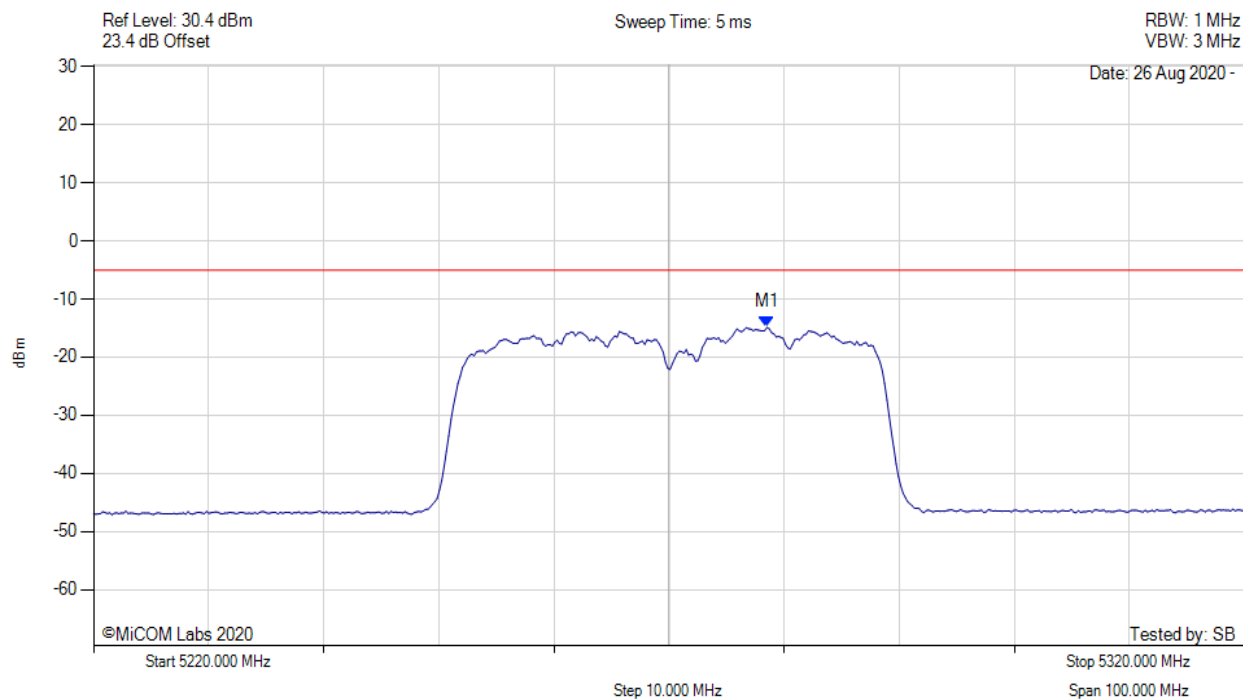


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5278.517 MHz : -14.882 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

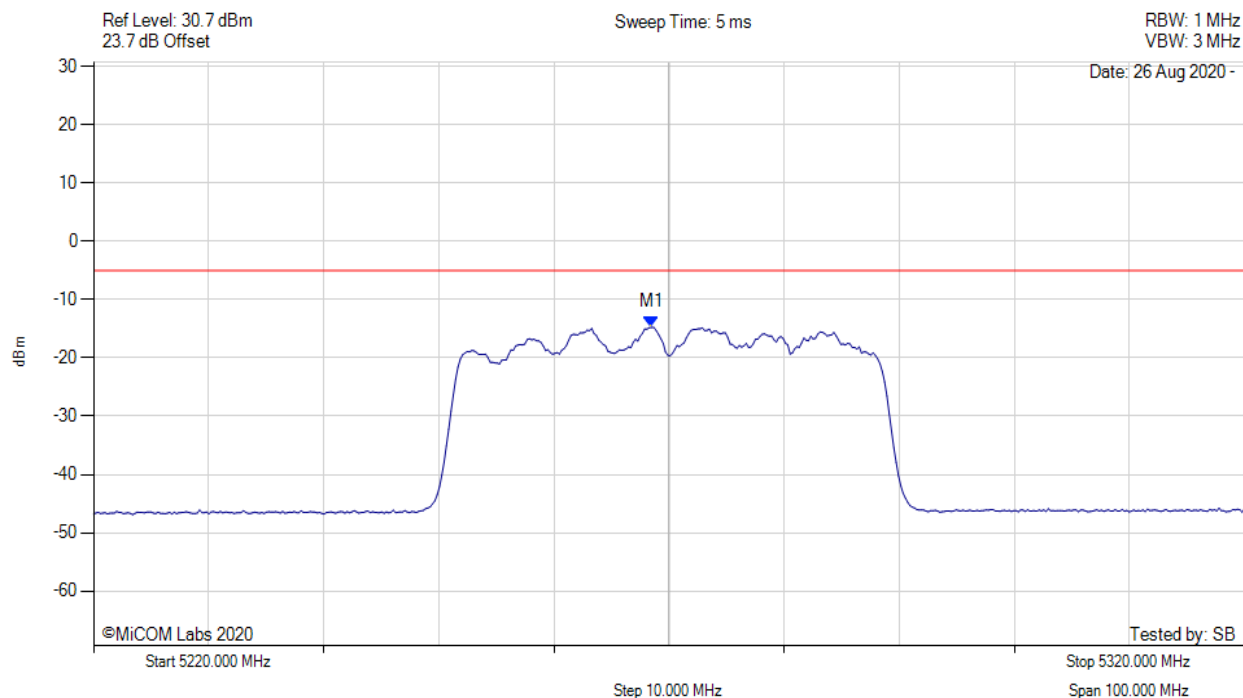


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5268.497 MHz : -14.751 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

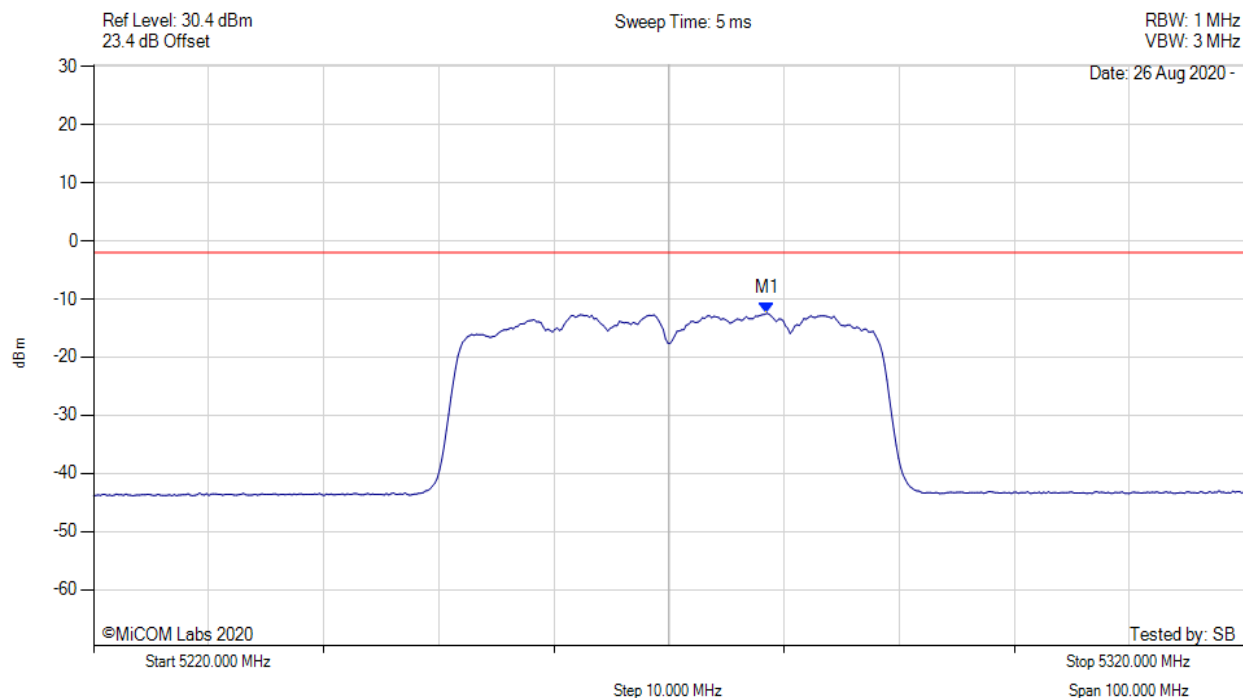


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5278.500 MHz : -12.444 dBm M1 + DCCF : 5278.500 MHz : -12.082 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ -2.0 dBm Margin: -10.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

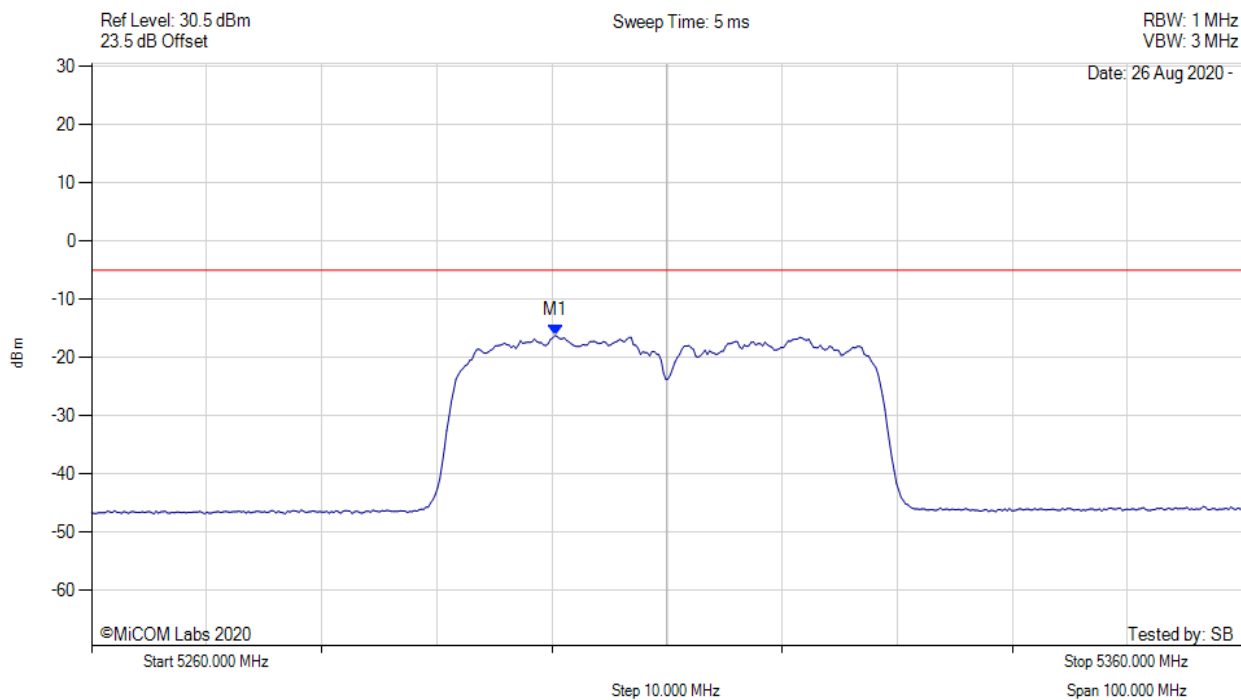


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5300.281 MHz : -16.216 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

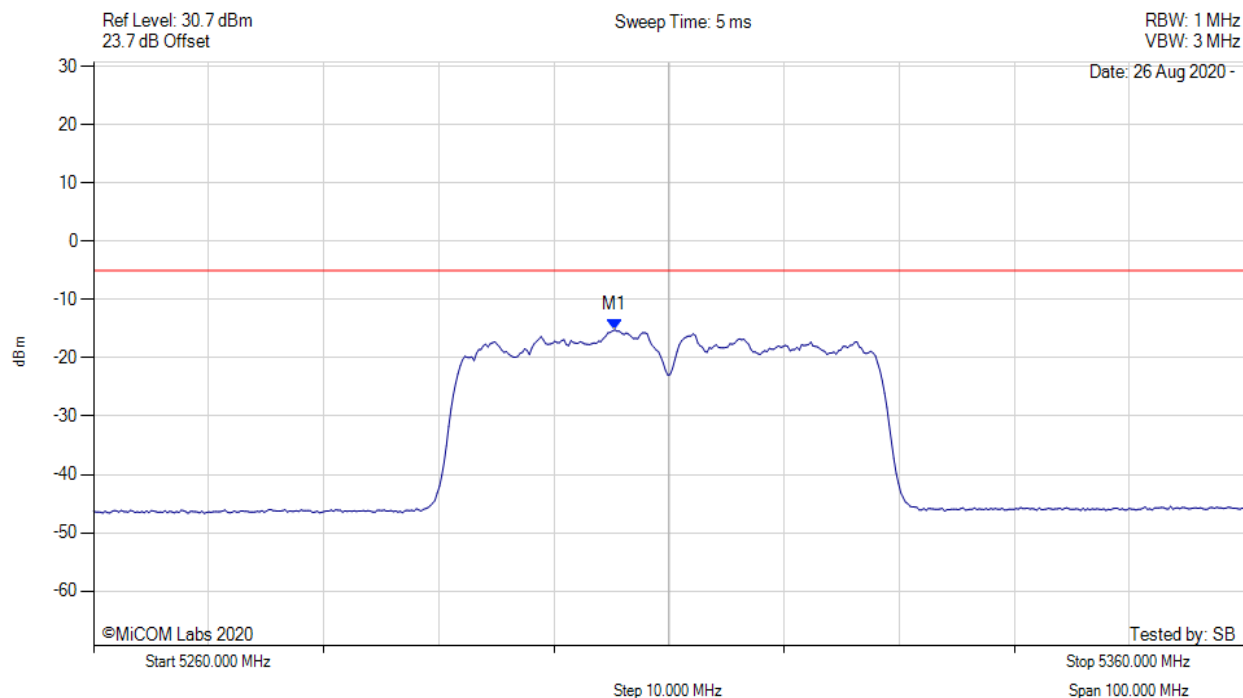


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.291 MHz : -15.185 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

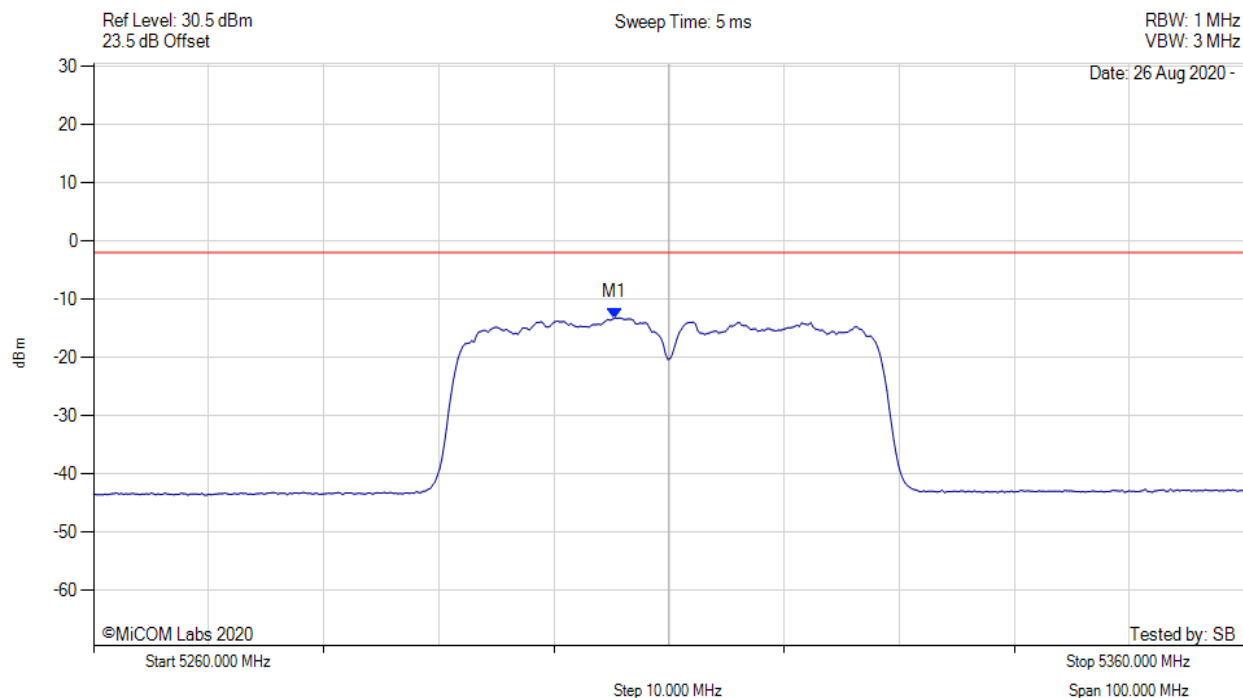


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.300 MHz : -13.204 dBm M1 + DCCF : 5305.300 MHz : -12.842 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ -2.0 dBm Margin: -10.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

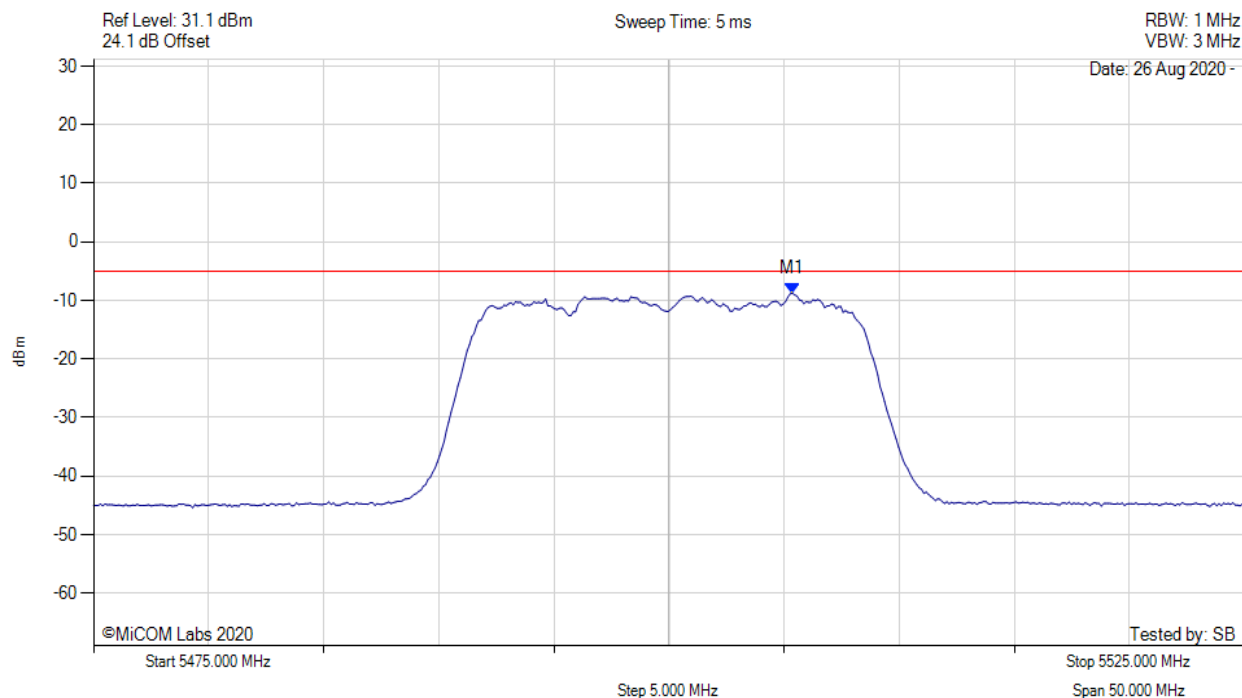


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.361 MHz : -8.750 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

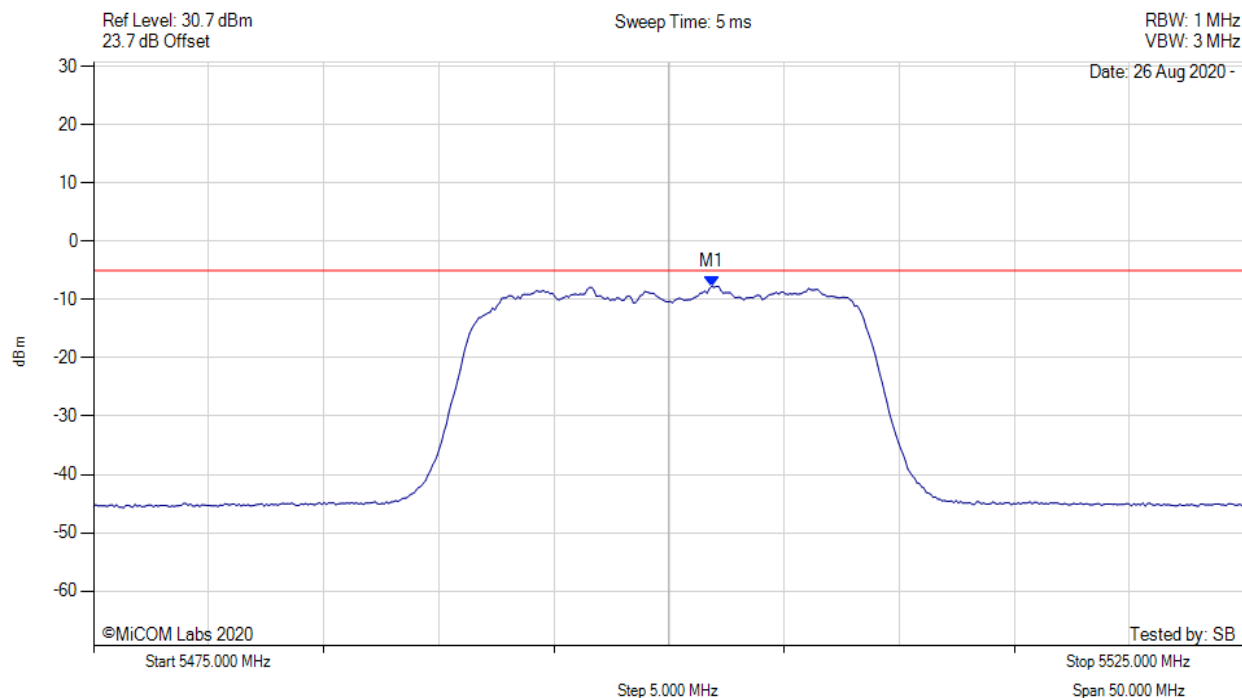


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5501.854 MHz : -7.707 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

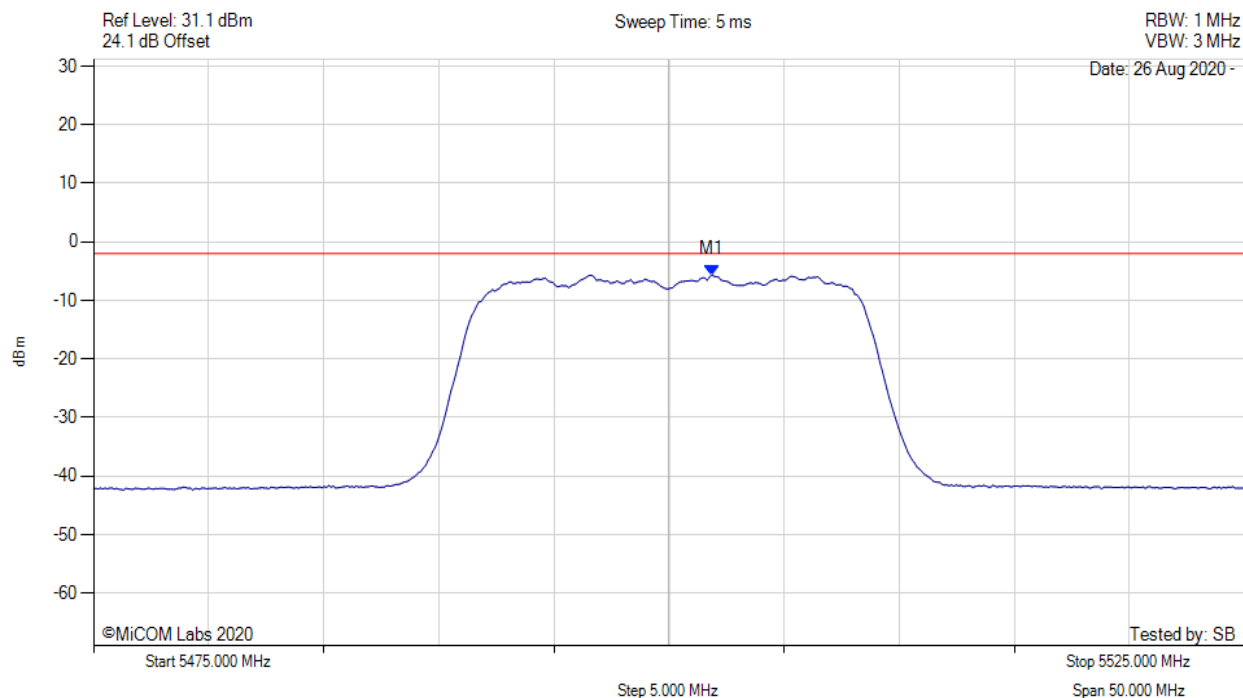


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5501.900 MHz : -5.643 dBm M1 + DCCF : 5501.900 MHz : -5.555 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -3.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

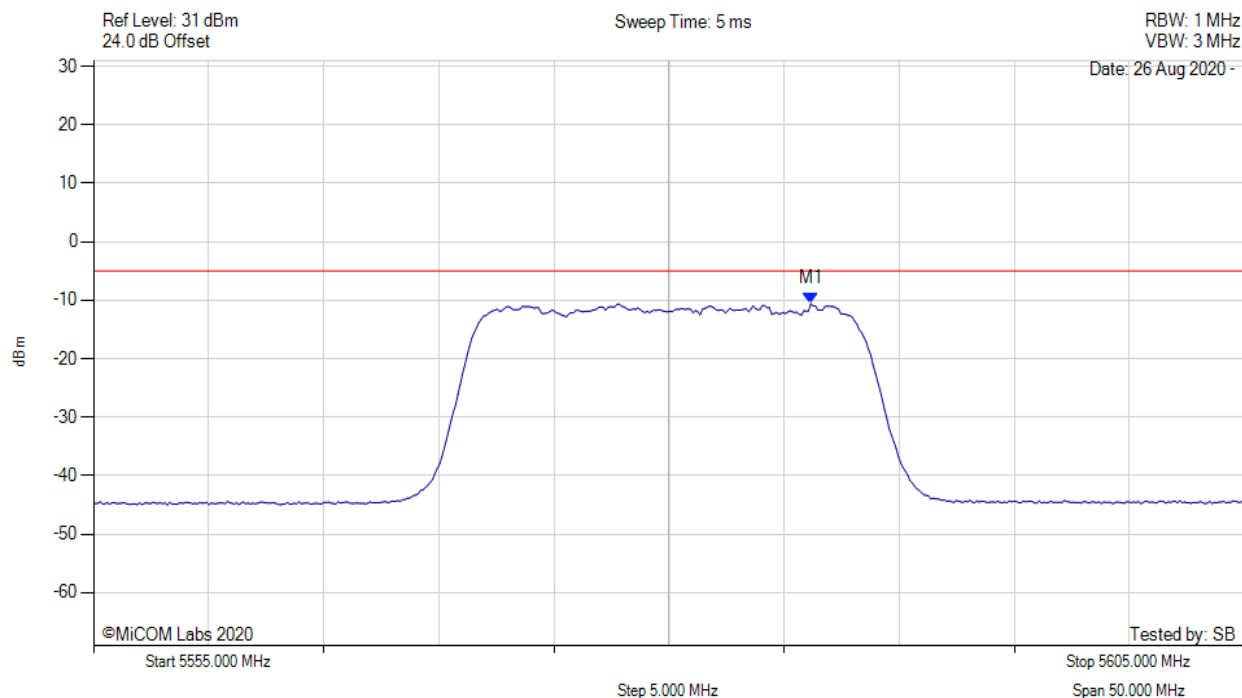


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5586.162 MHz : -10.587 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

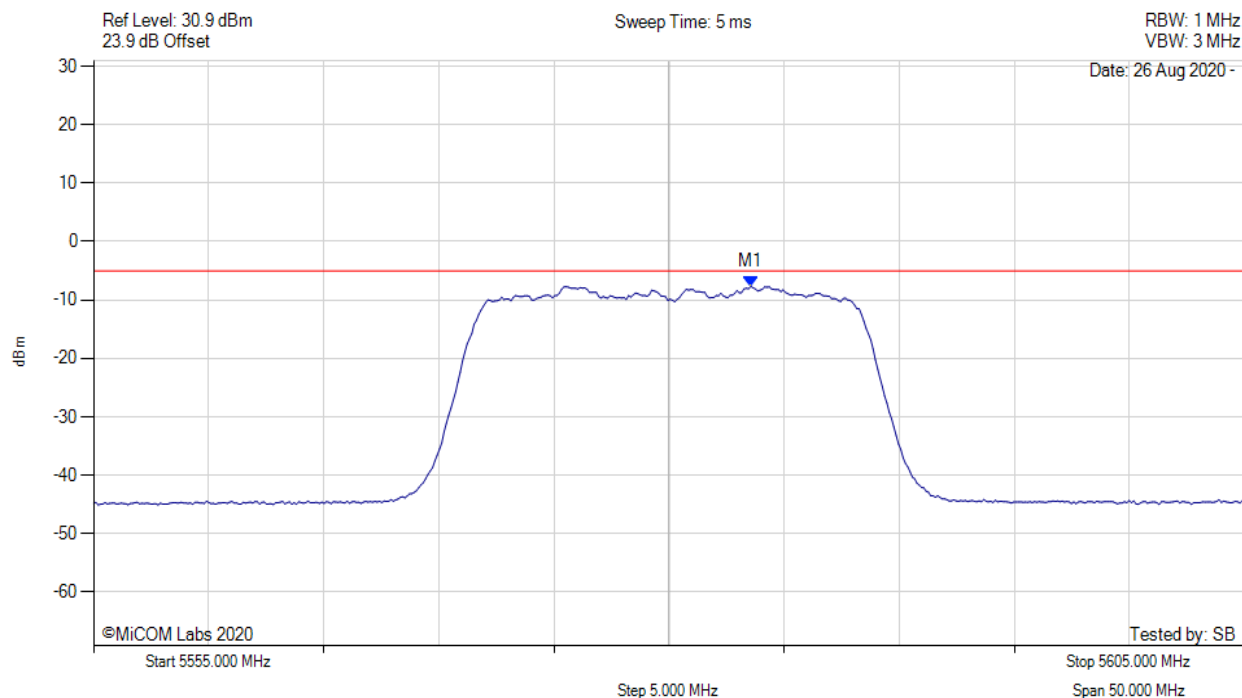


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5583.557 MHz : -7.675 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

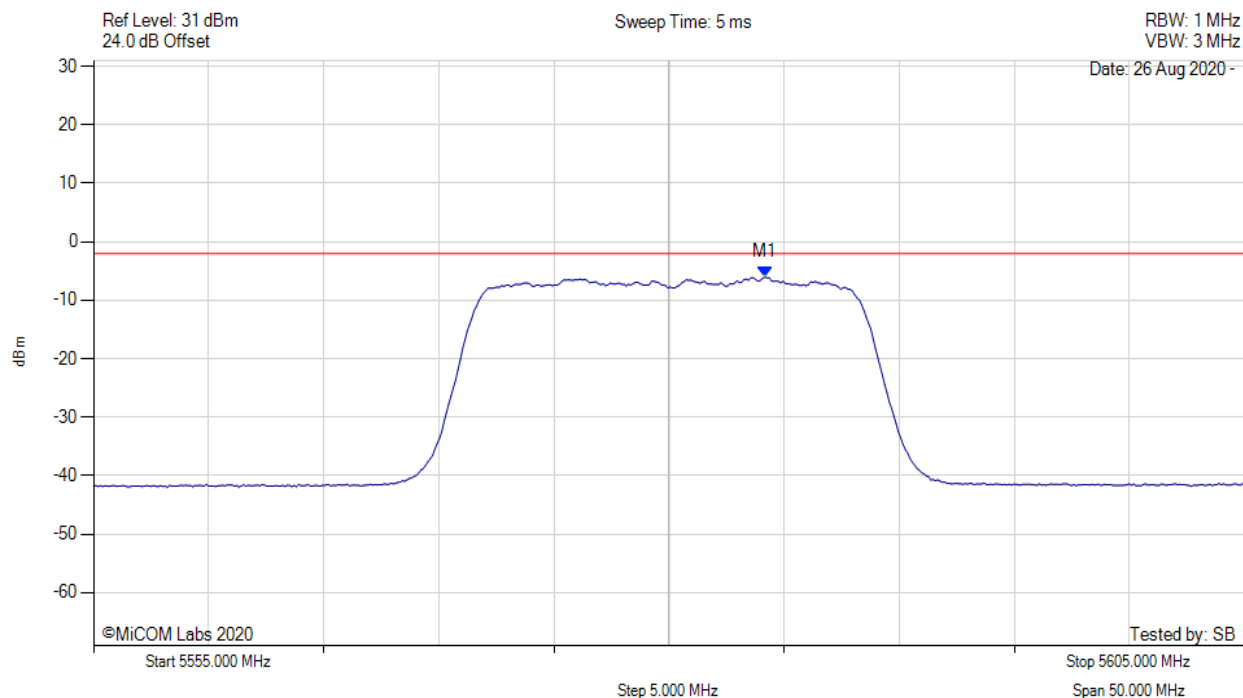


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5584.200 MHz : -6.039 dBm M1 + DCCF : 5584.200 MHz : -5.951 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -4.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

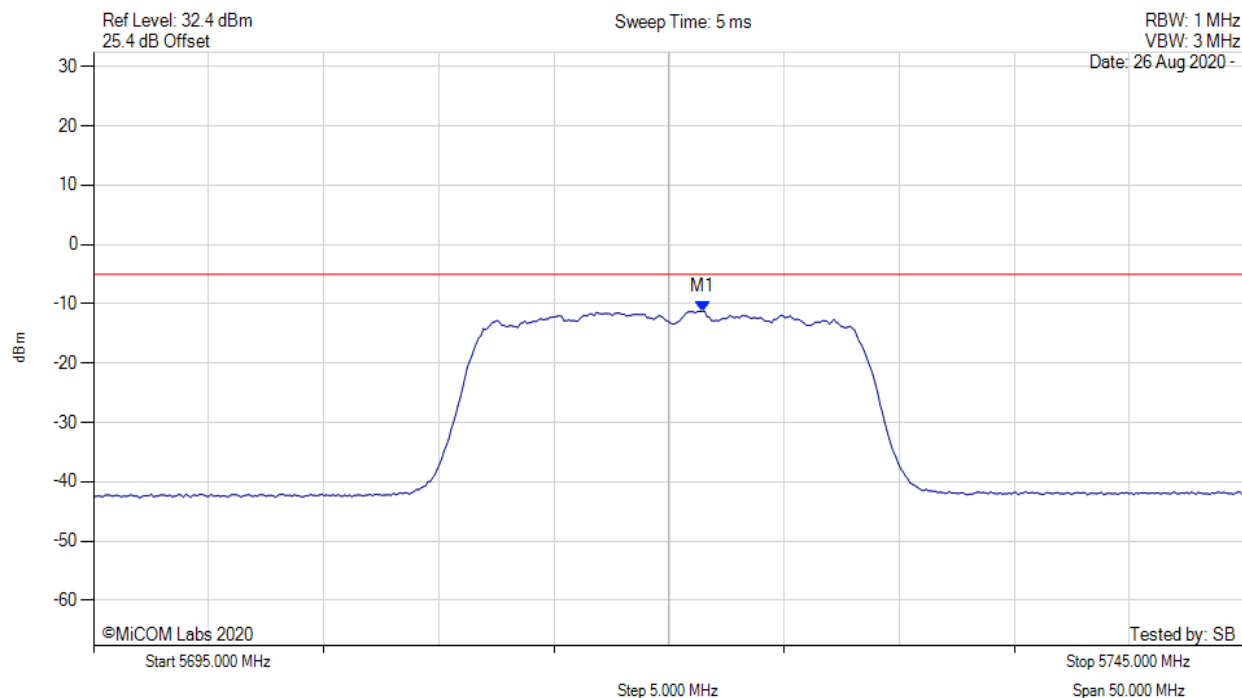


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5721.453 MHz : -11.239 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

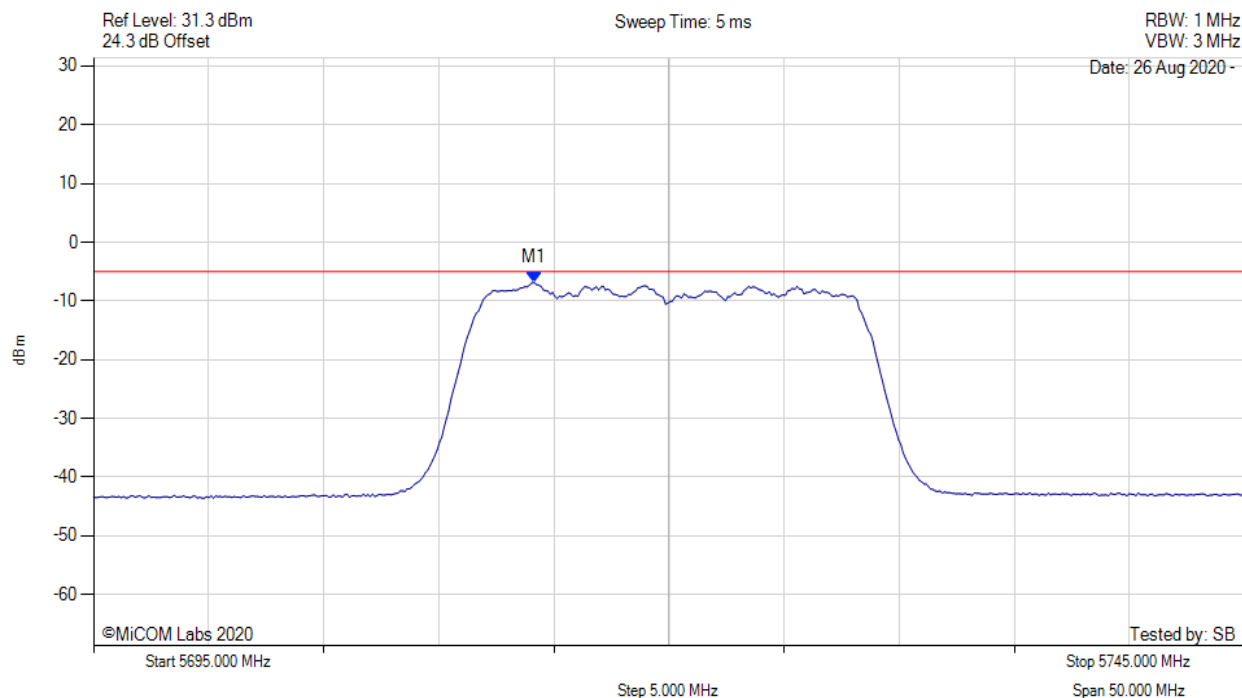


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.138 MHz : -6.874 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

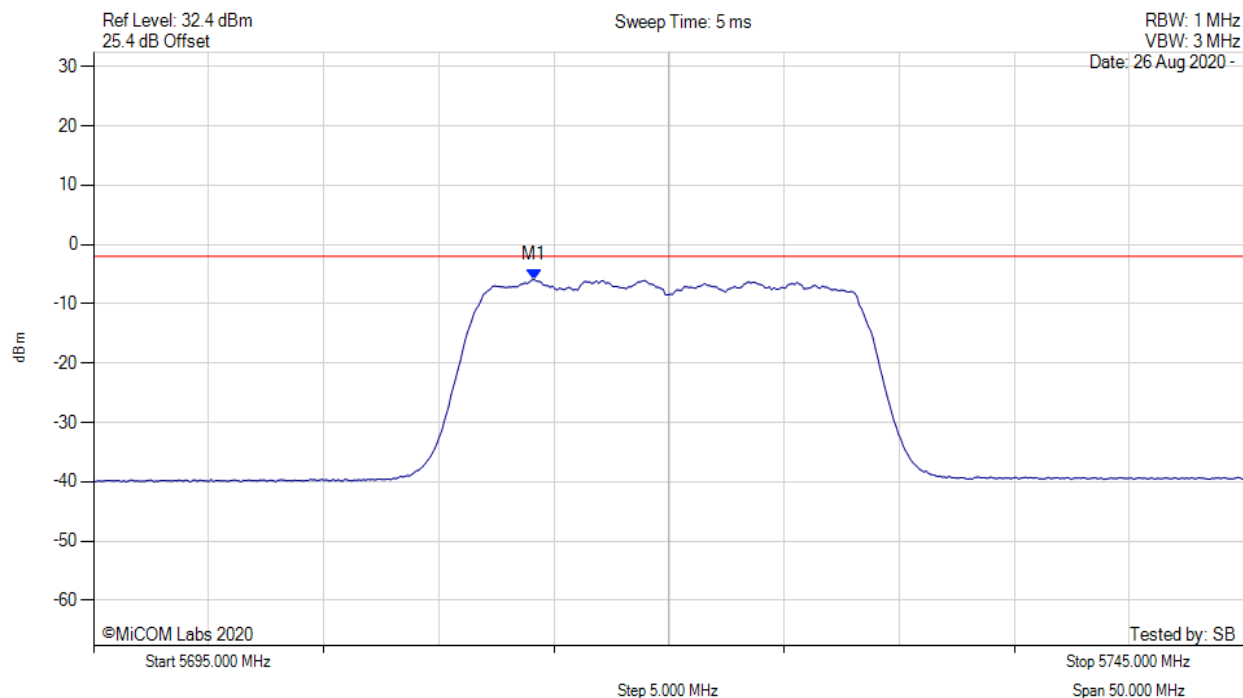


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.100 MHz : -5.912 dBm M1 + DCCF : 5714.100 MHz : -5.868 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -3.9 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

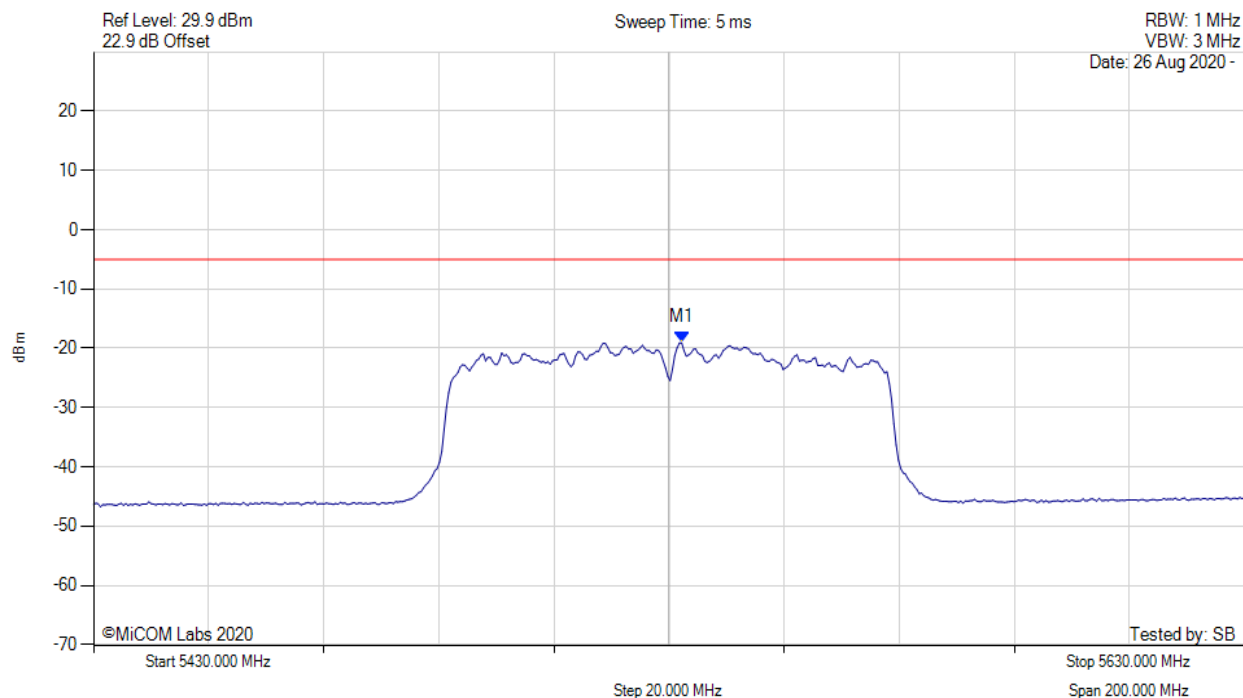


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5532.204 MHz : -19.074 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

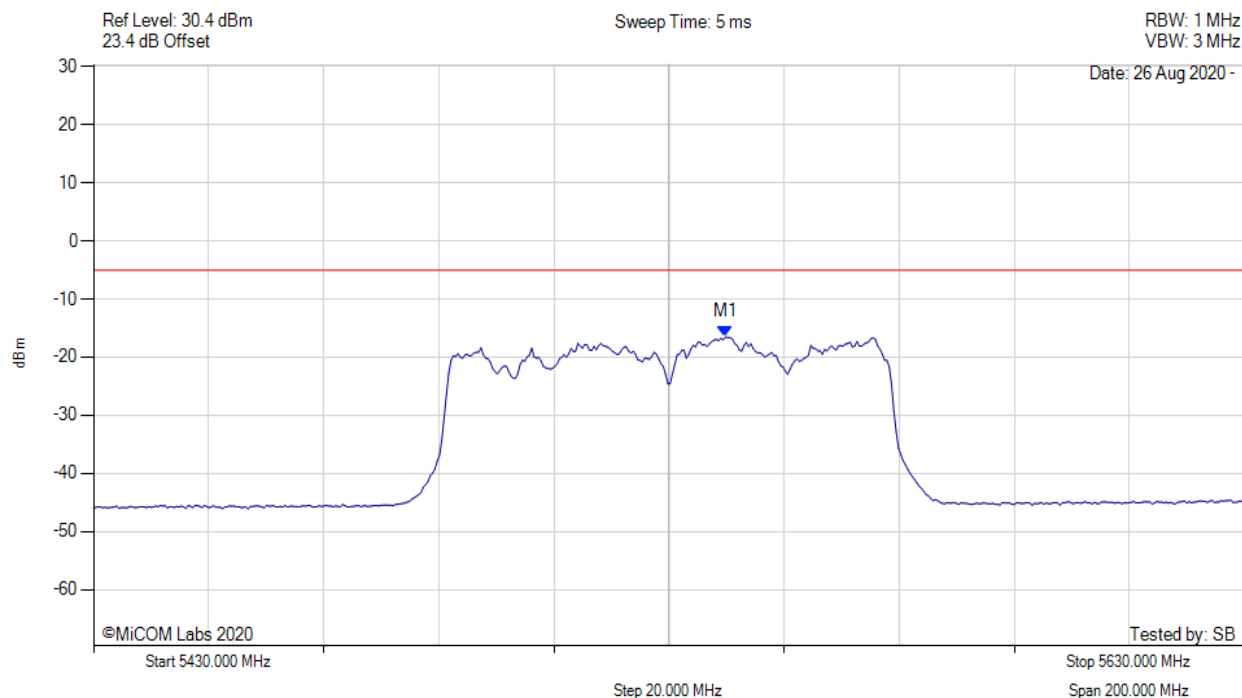


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5539.820 MHz : -16.534 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

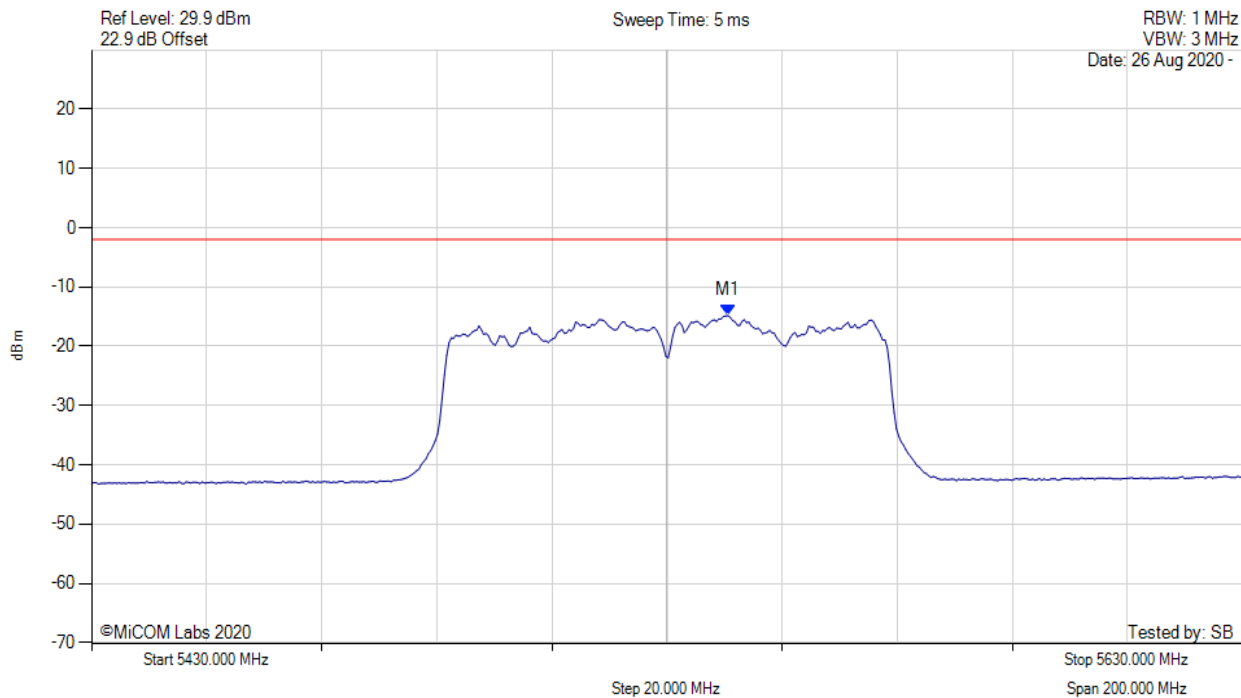


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5540.600 MHz : -14.847 dBm M1 + DCCF : 5540.600 MHz : -13.985 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ -2.0 dBm Margin: -12.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

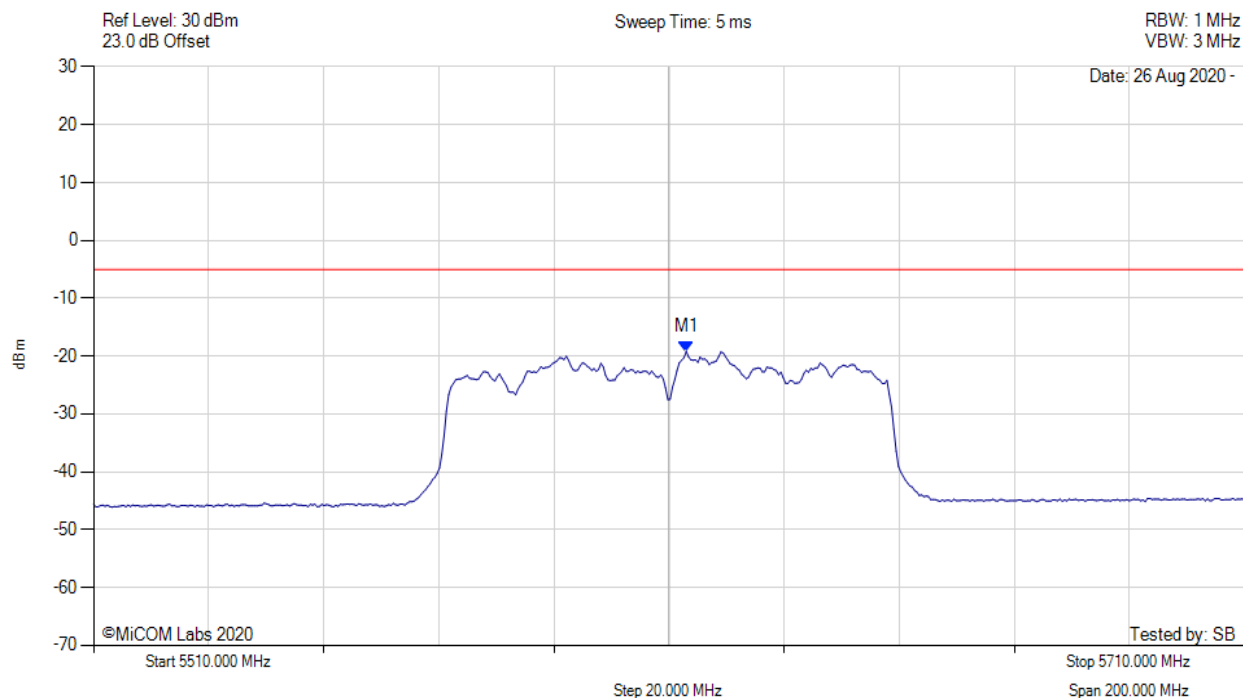


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5613.006 MHz : -19.181 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

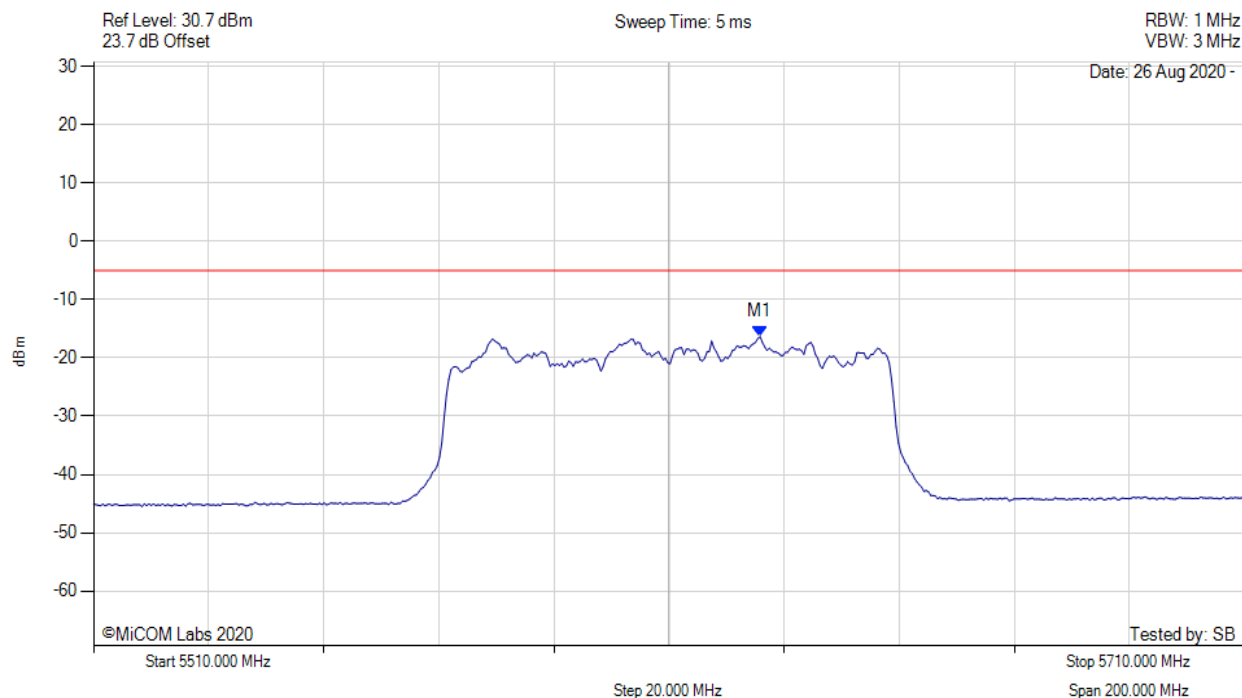


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5625.832 MHz : -16.350 dBm	Channel Frequency: 5610.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

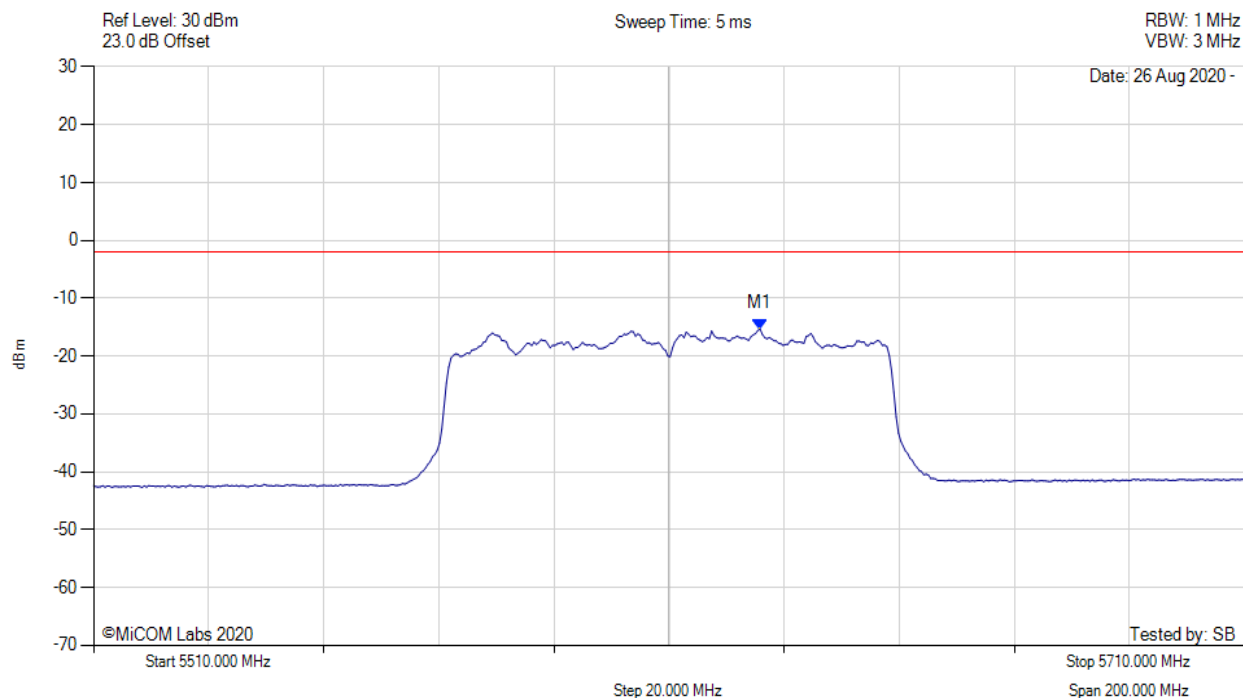


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5625.800 MHz : -15.324 dBm M1 + DCCF : 5625.800 MHz : -14.462 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ -2.0 dBm Margin: -12.5 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

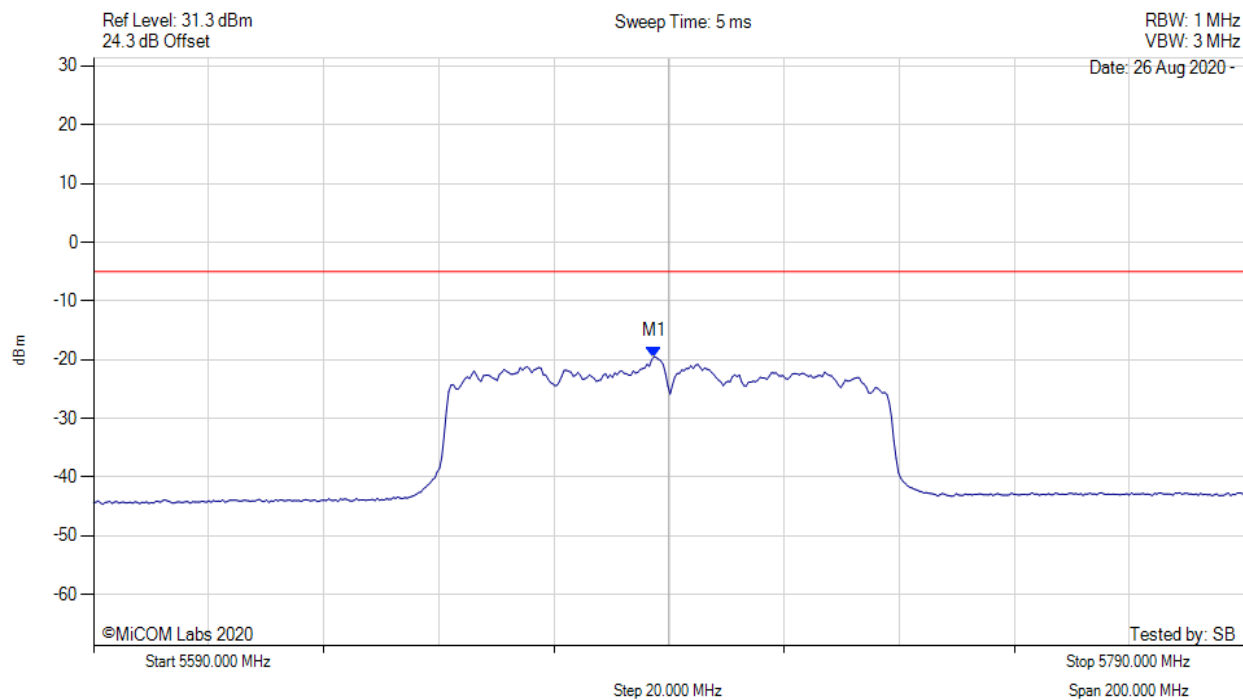


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5687.395 MHz : -19.523 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

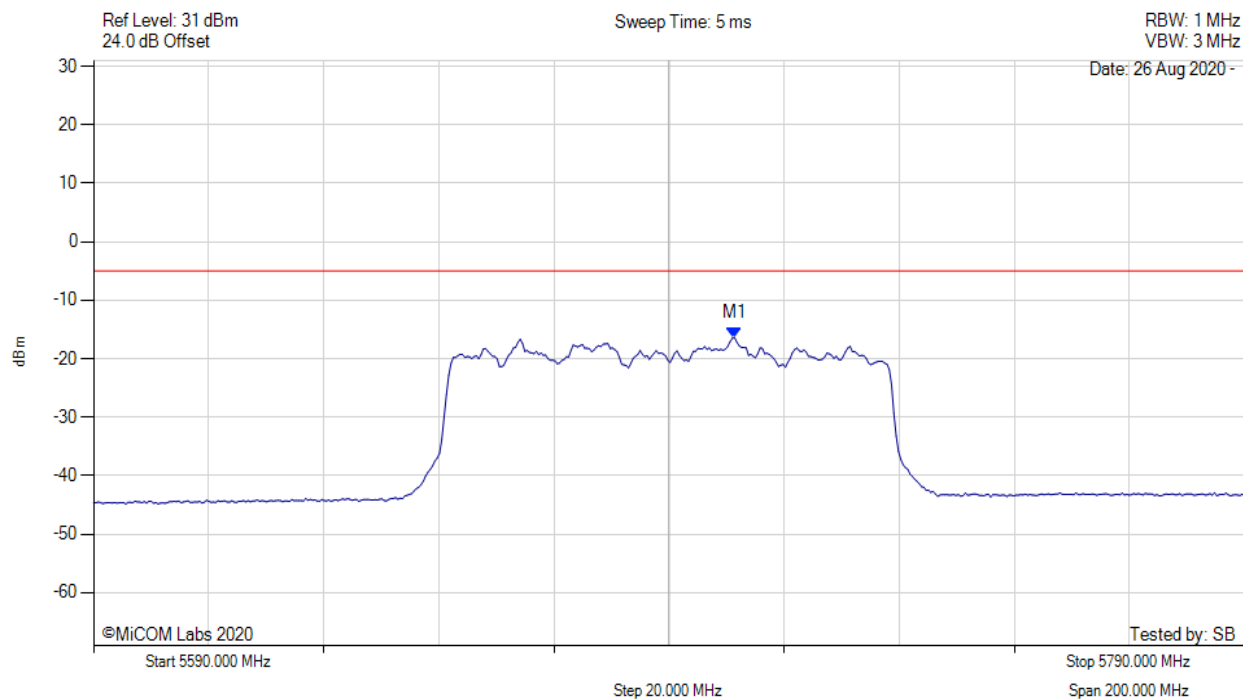


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5701.423 MHz : -16.440 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

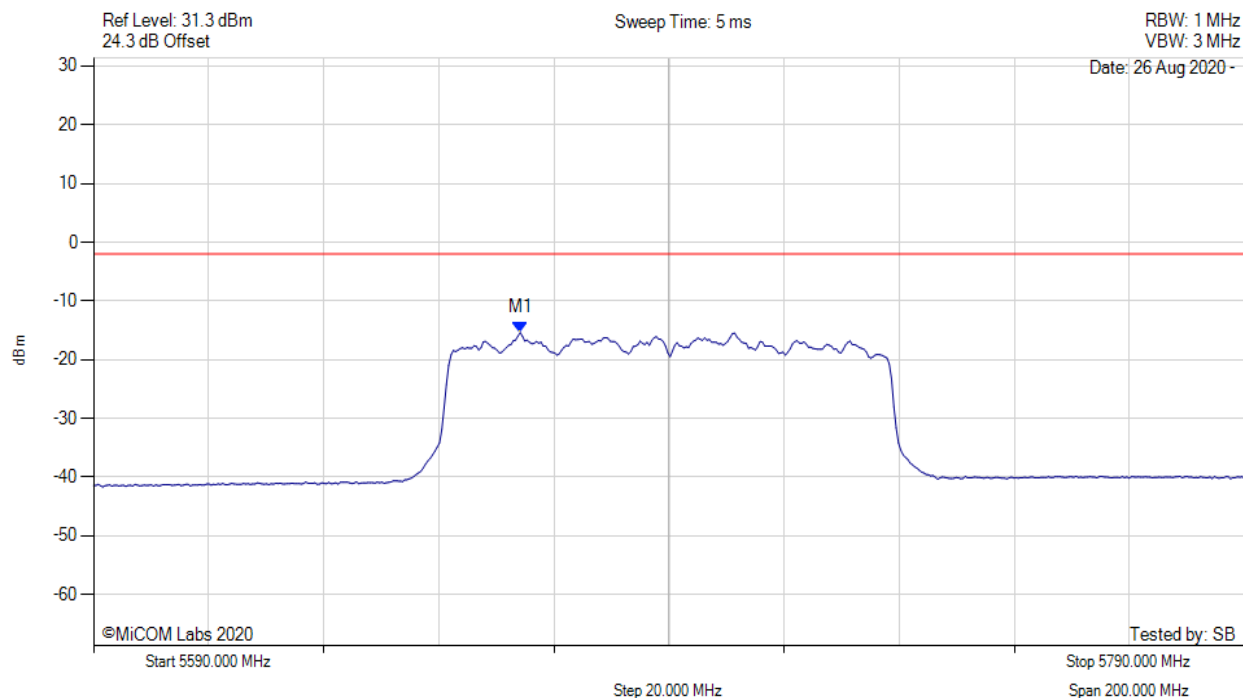


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5664.100 MHz : -15.395 dBm M1 + DCCF : 5664.100 MHz : -14.533 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ -2.0 dBm Margin: -12.5 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

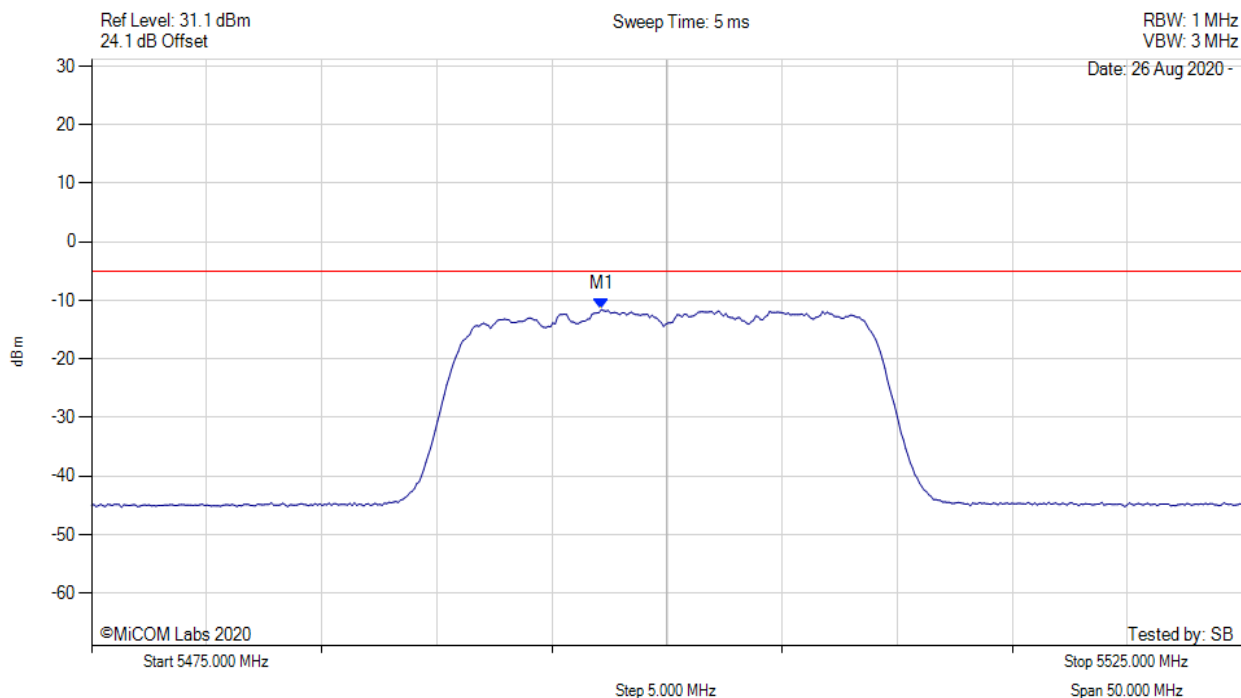


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.144 MHz : -11.554 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

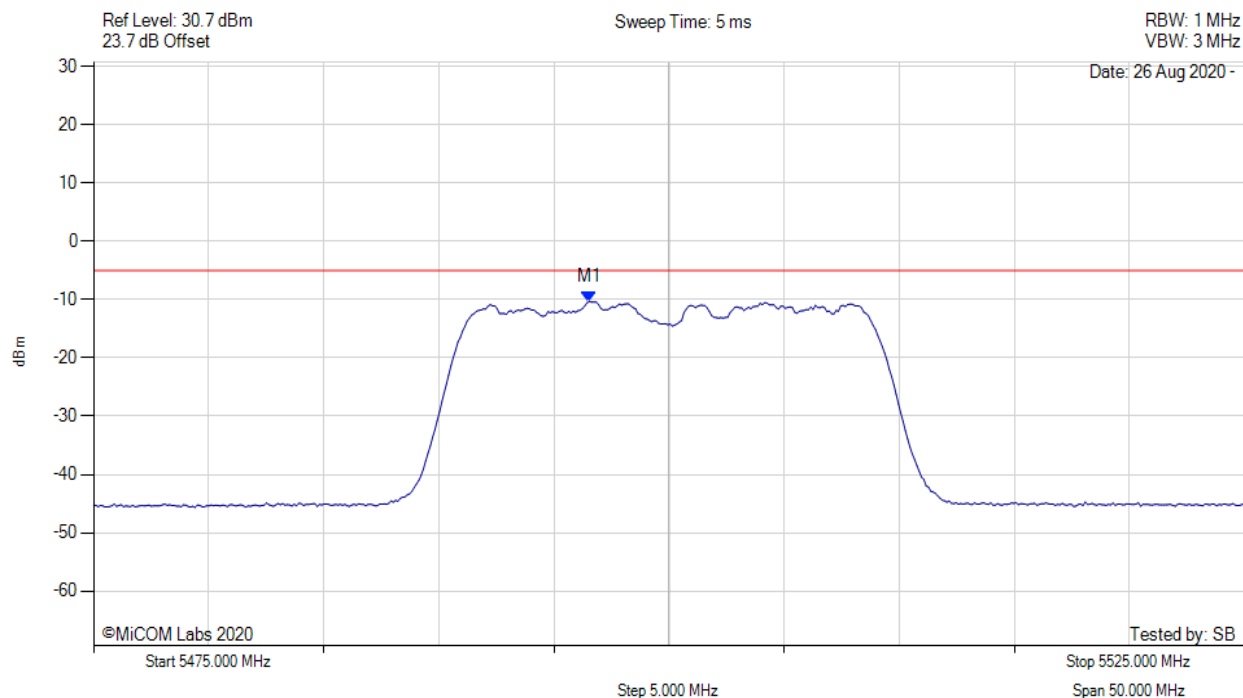


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5496.543 MHz : -10.343 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

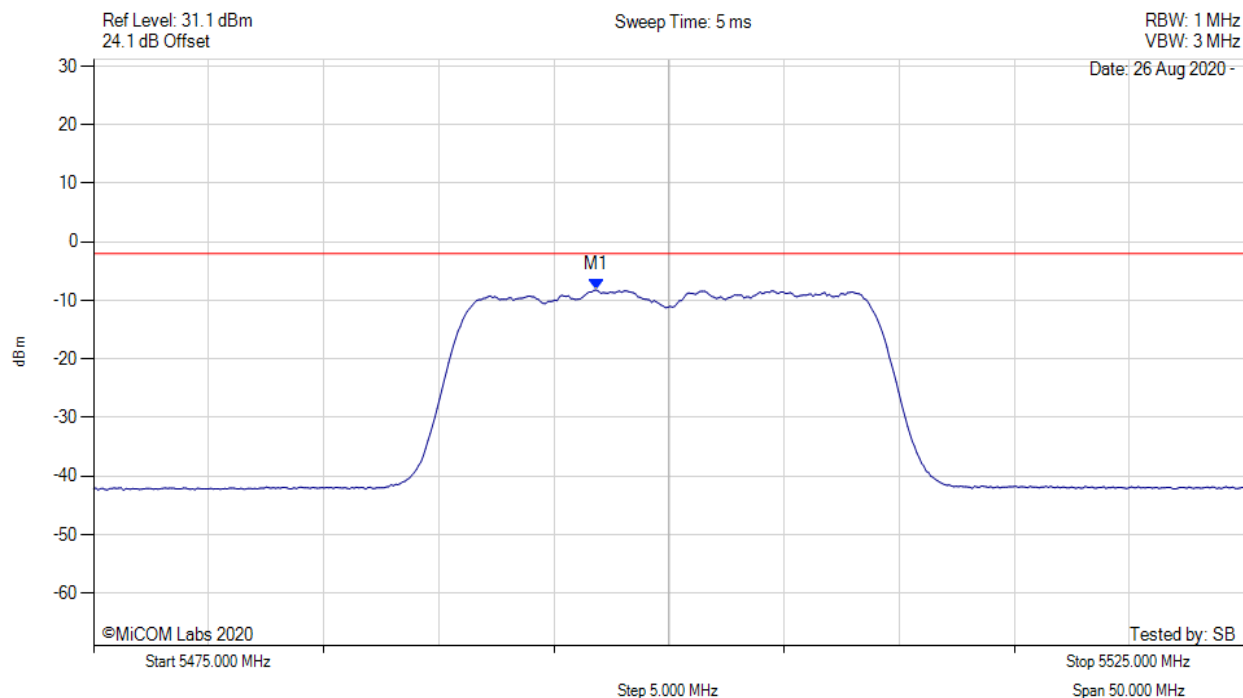


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5496.800 MHz : -8.213 dBm M1 + DCCF : 5496.800 MHz : -8.125 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -6.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

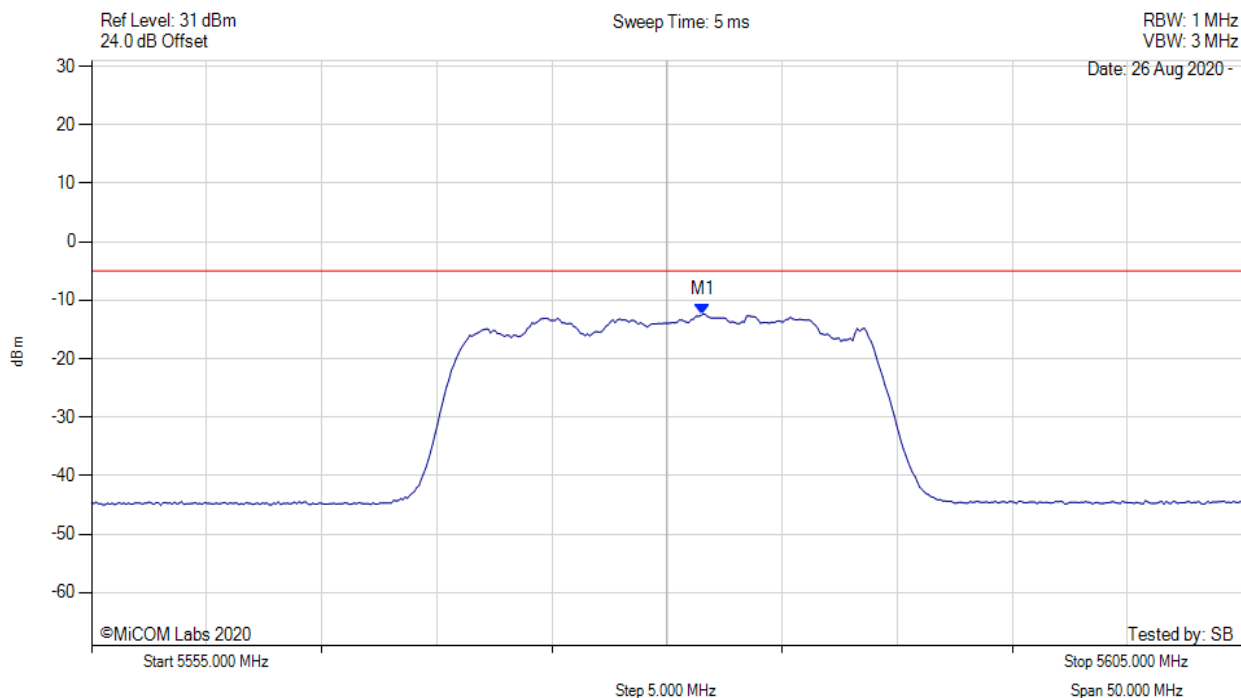


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5581.553 MHz : -12.379 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

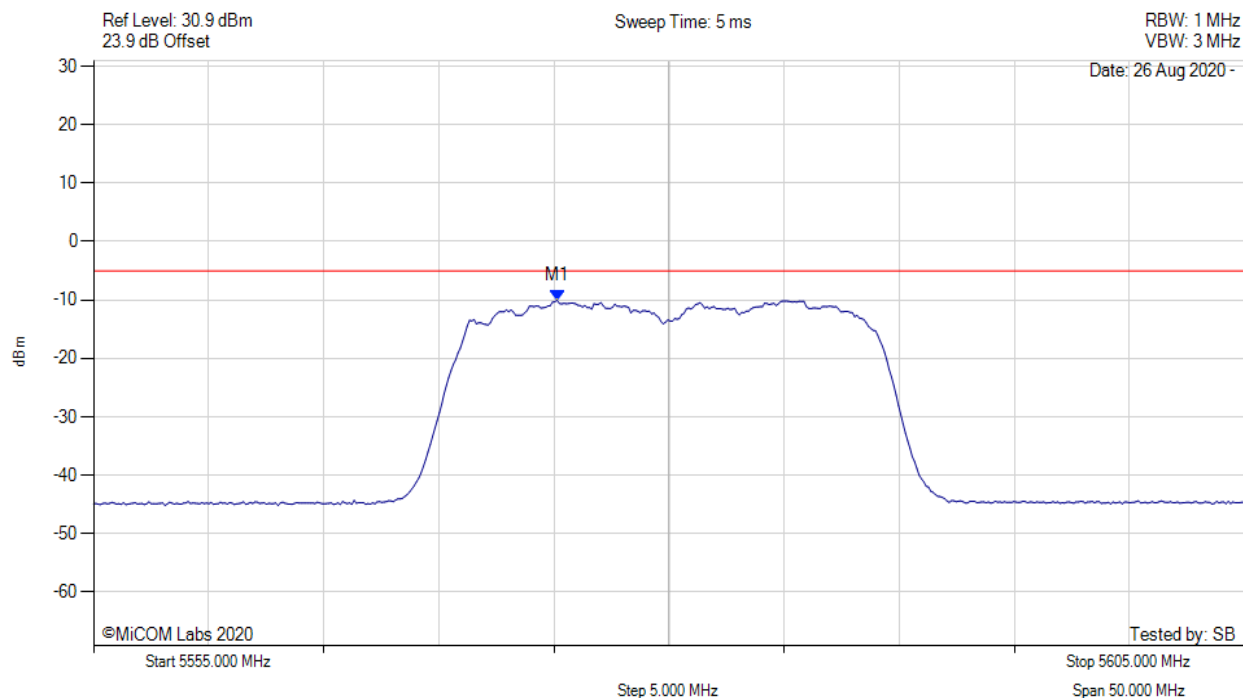


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.140 MHz : -10.045 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

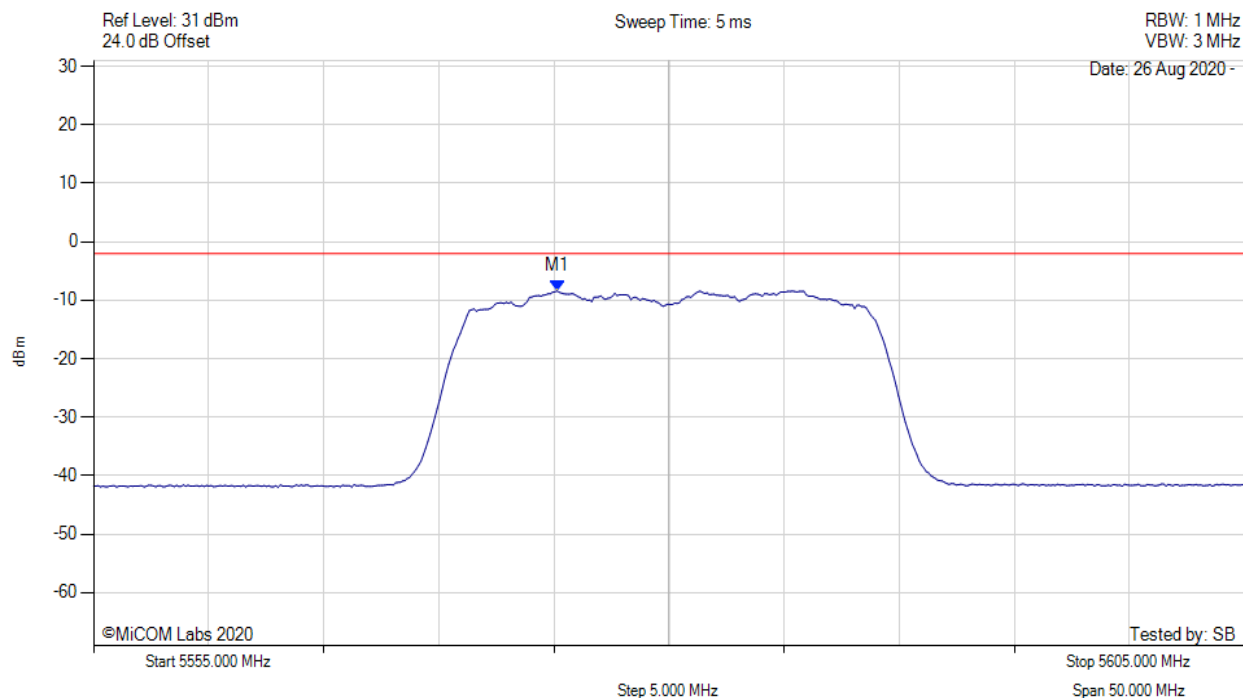


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.100 MHz : -8.414 dBm M1 + DCCF : 5575.100 MHz : -8.326 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -6.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

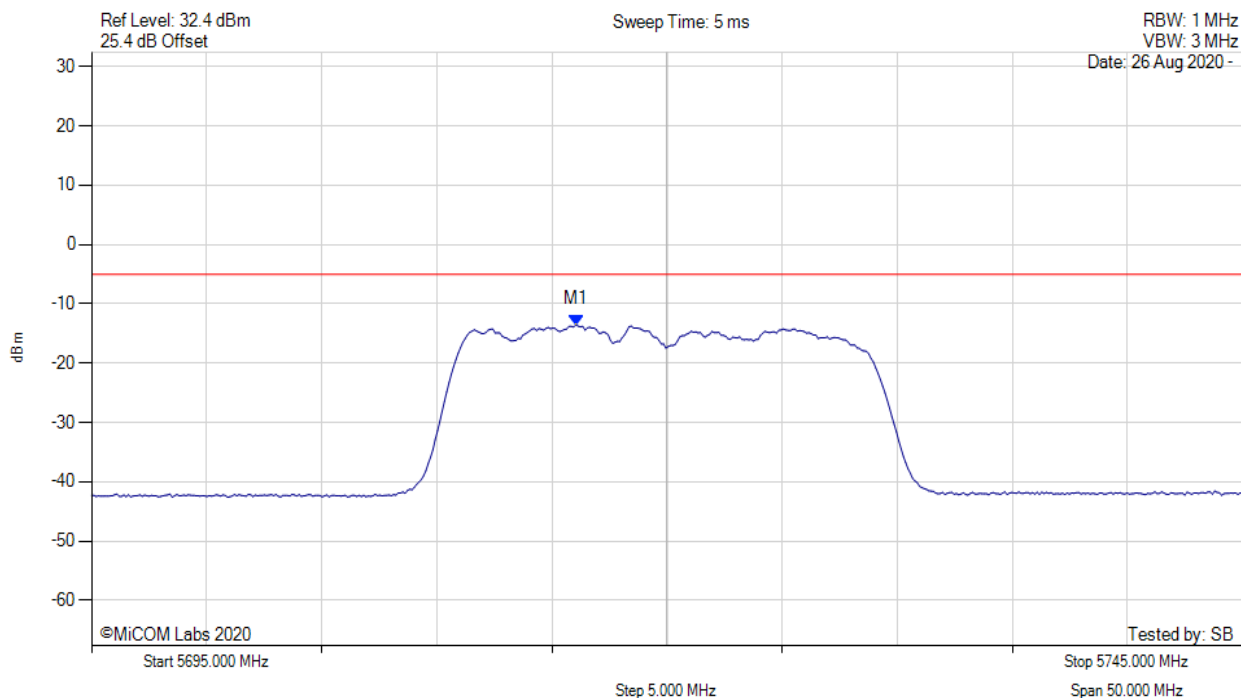


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5716.042 MHz : -13.543 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

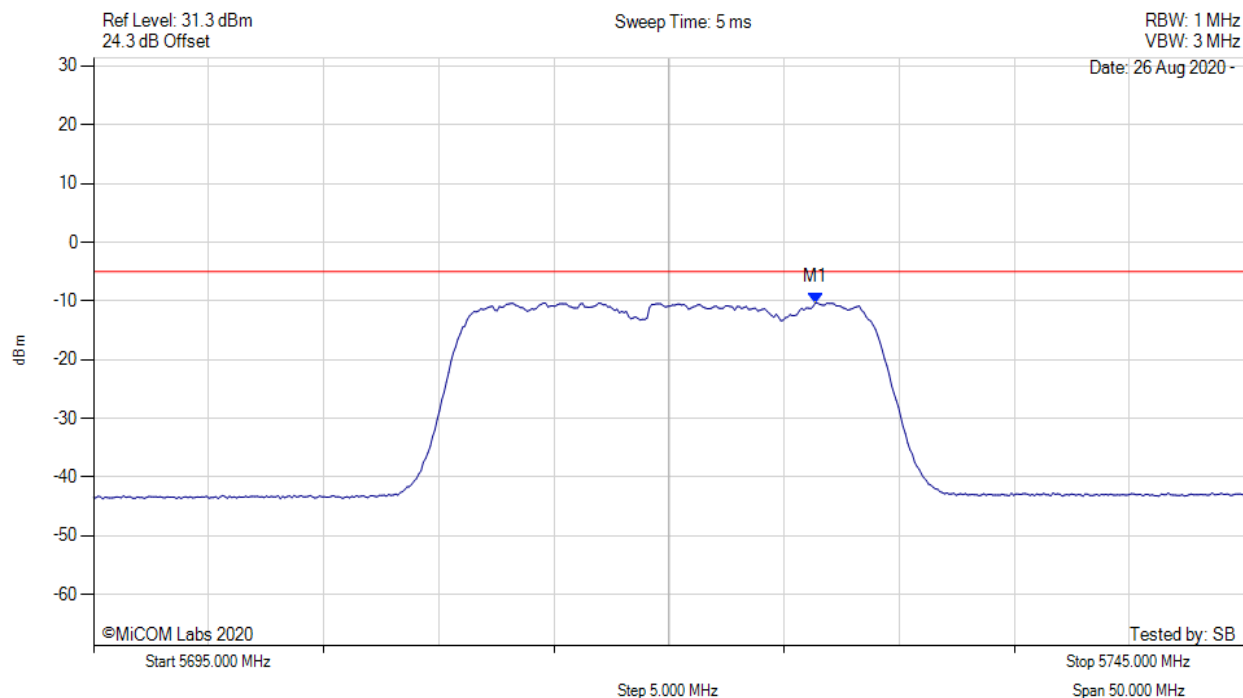


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5726.363 MHz : -10.326 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

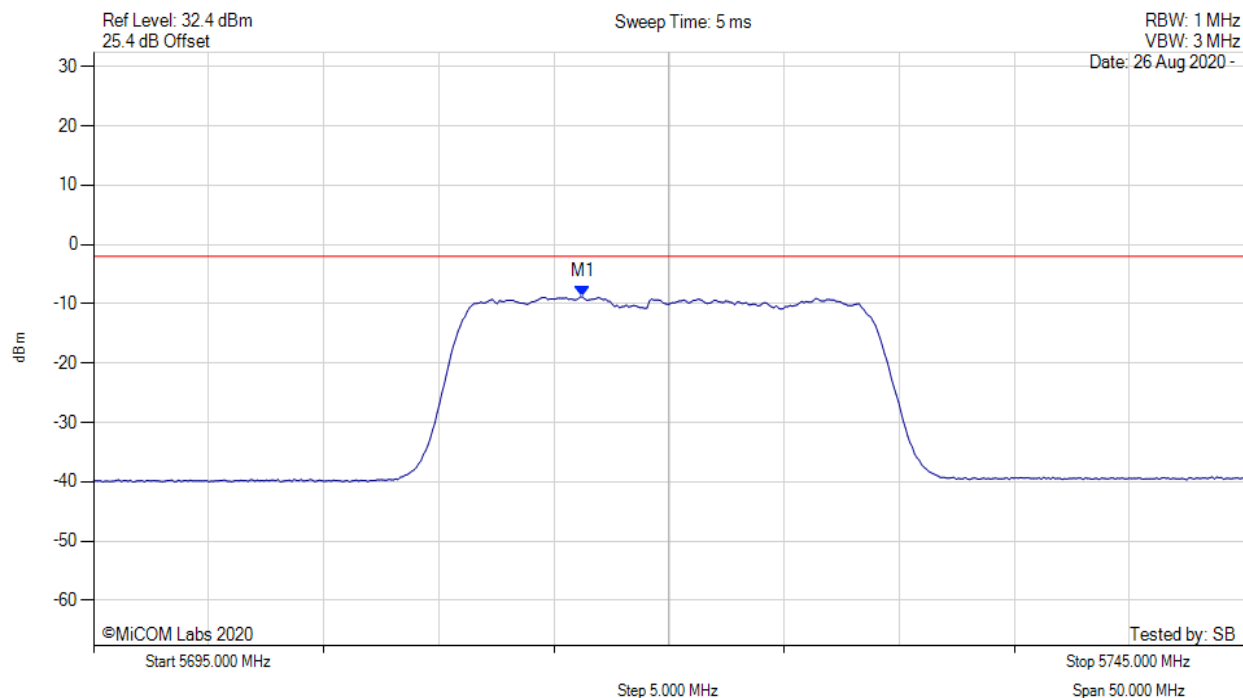


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5716.200 MHz : -8.823 dBm M1 + DCCF : 5716.200 MHz : -8.779 dBm Duty Cycle Correction Factor : +0.09 dB	Limit: ≤ -2.0 dBm Margin: -6.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

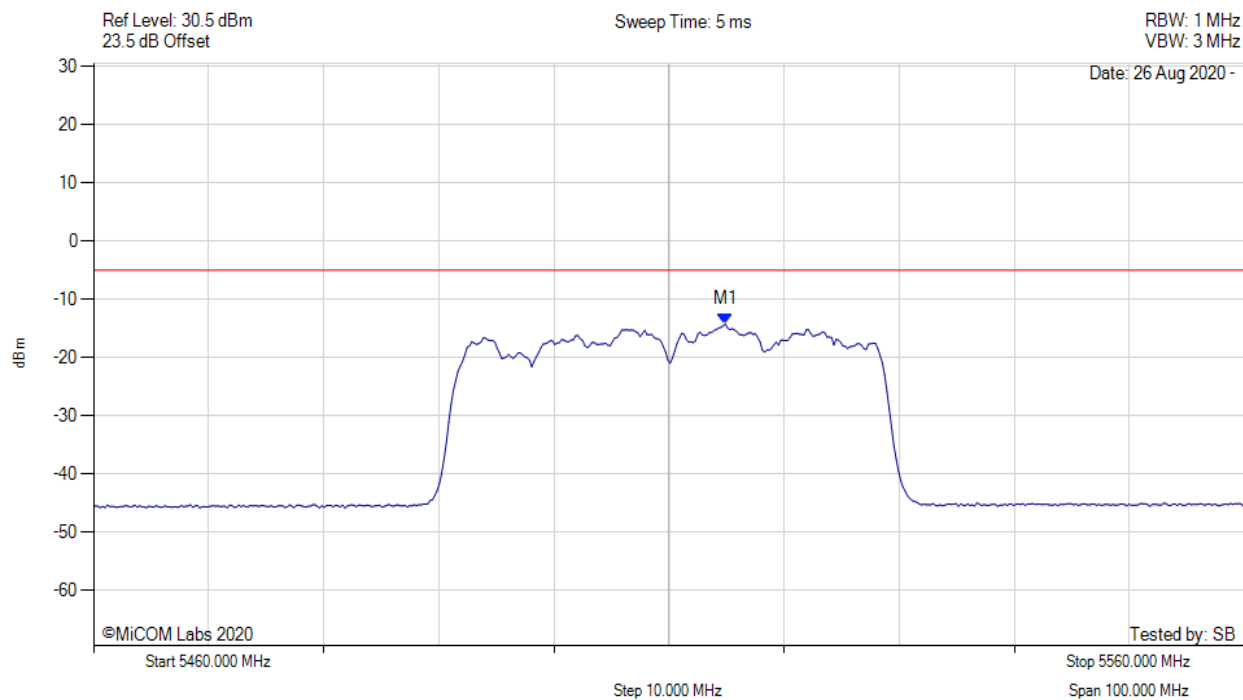


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5514.910 MHz : -14.270 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

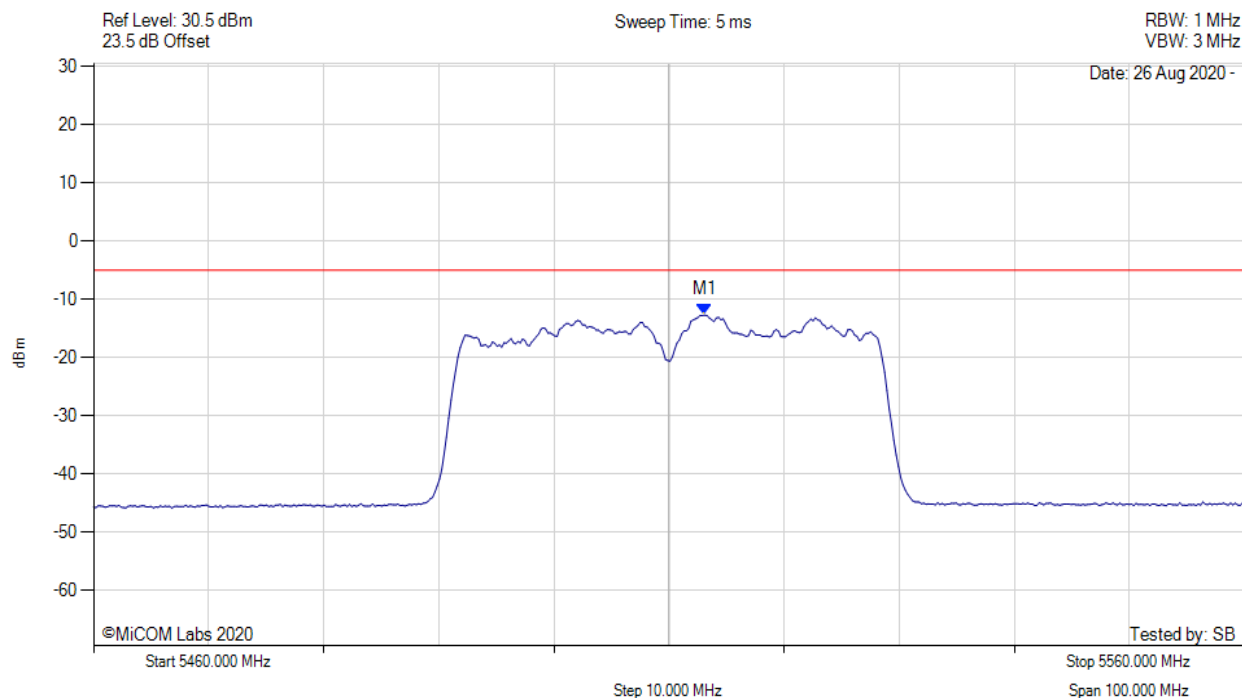


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5513.106 MHz : -12.708 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

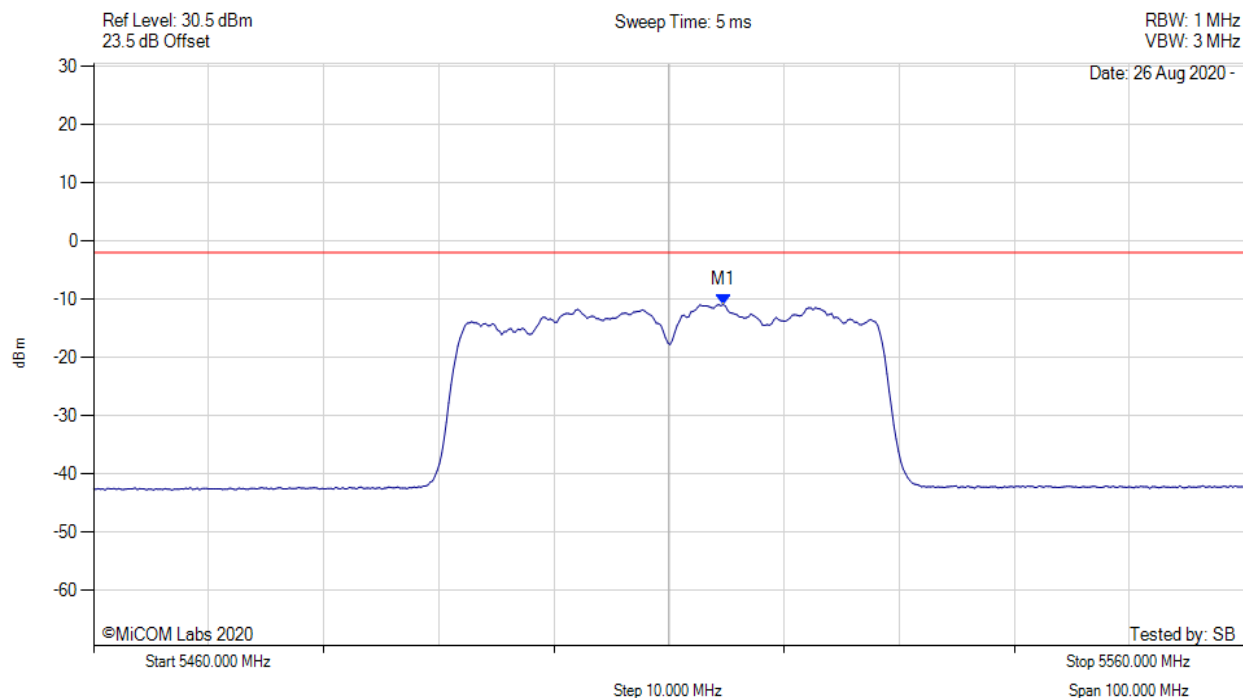


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5514.700 MHz : -10.918 dBm M1 + DCCF : 5514.700 MHz : -10.556 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ -2.0 dBm Margin: -8.6 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

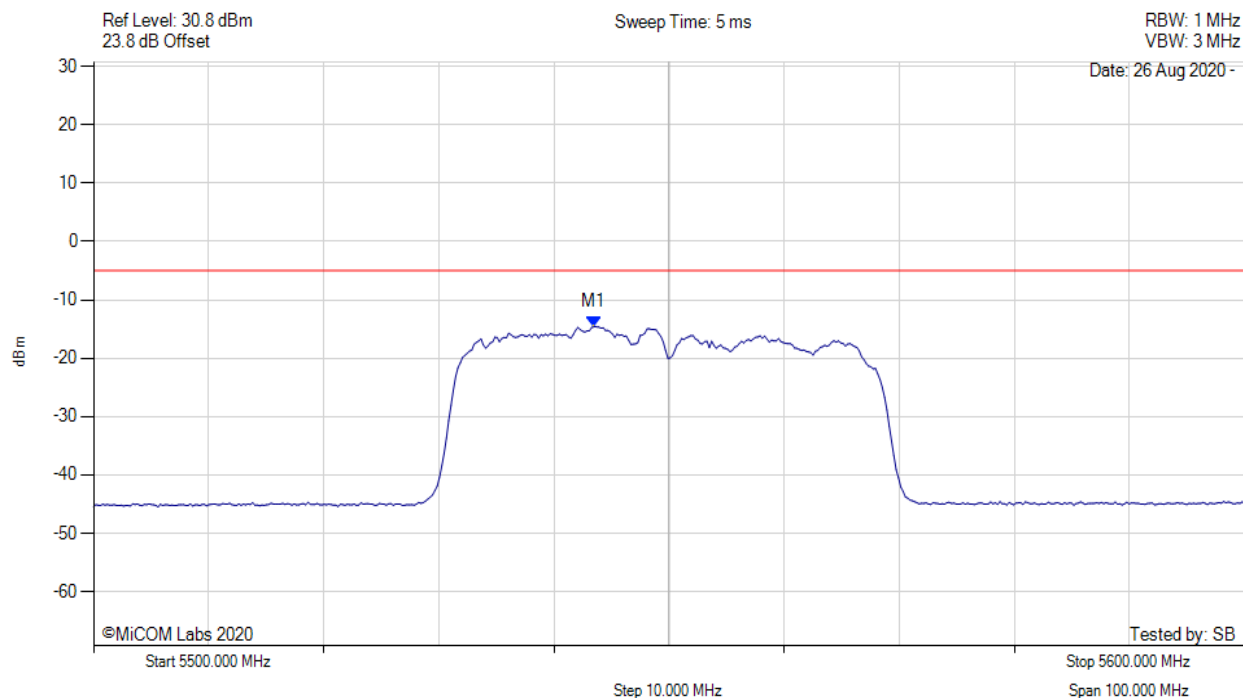


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5543.487 MHz : -14.615 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

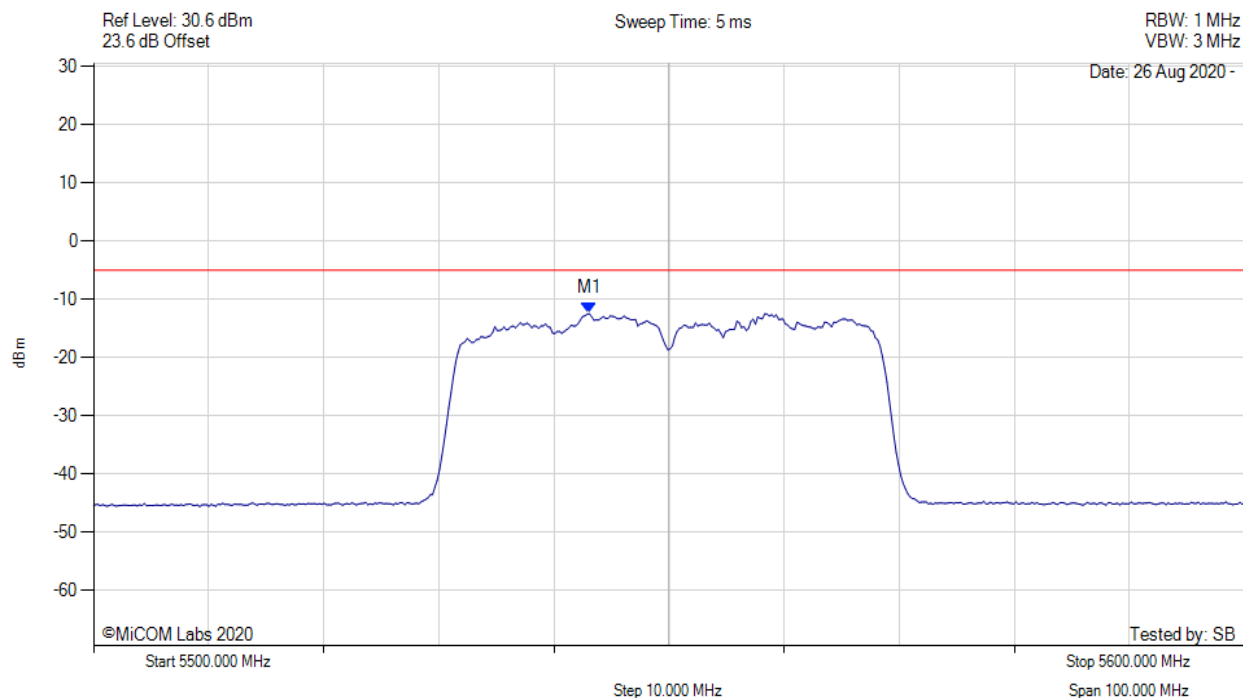


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5543.086 MHz : -12.437 dBm	Channel Frequency: 5550.00 MHz

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

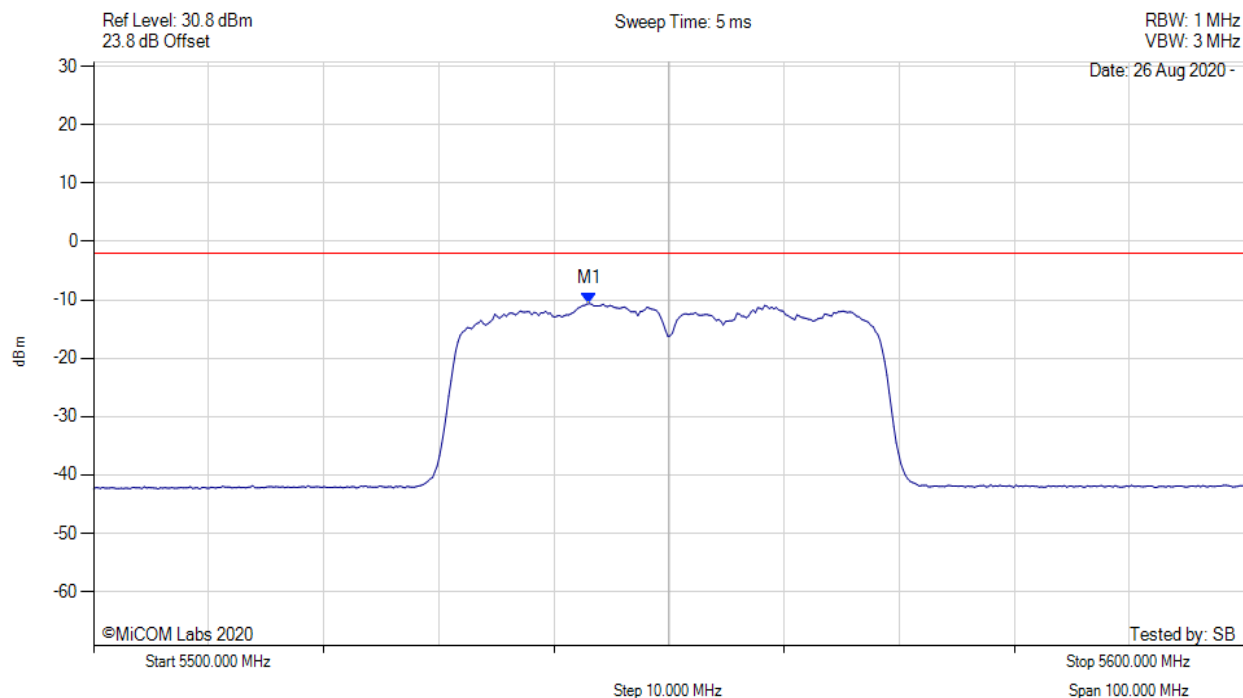


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5543.100 MHz : -10.625 dBm M1 + DCCF : 5543.100 MHz : -10.263 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ -2.0 dBm Margin: -8.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 48 Vdc

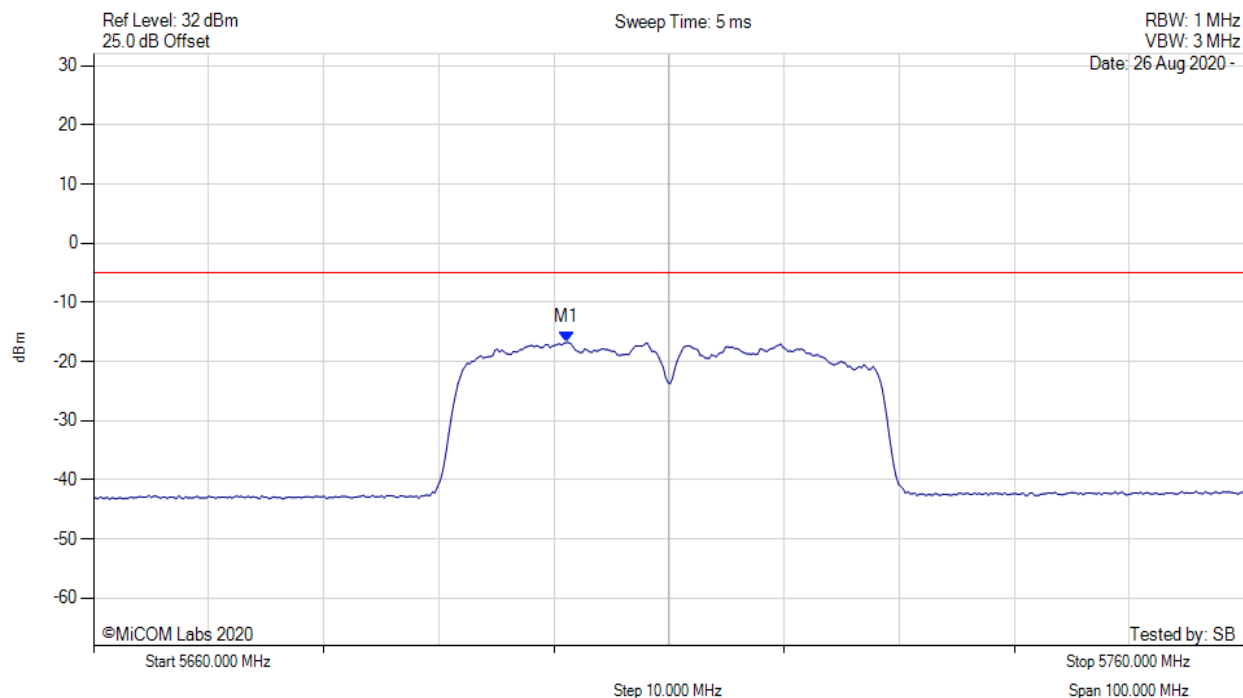


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5701.082 MHz : -16.788 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: 48 Vdc

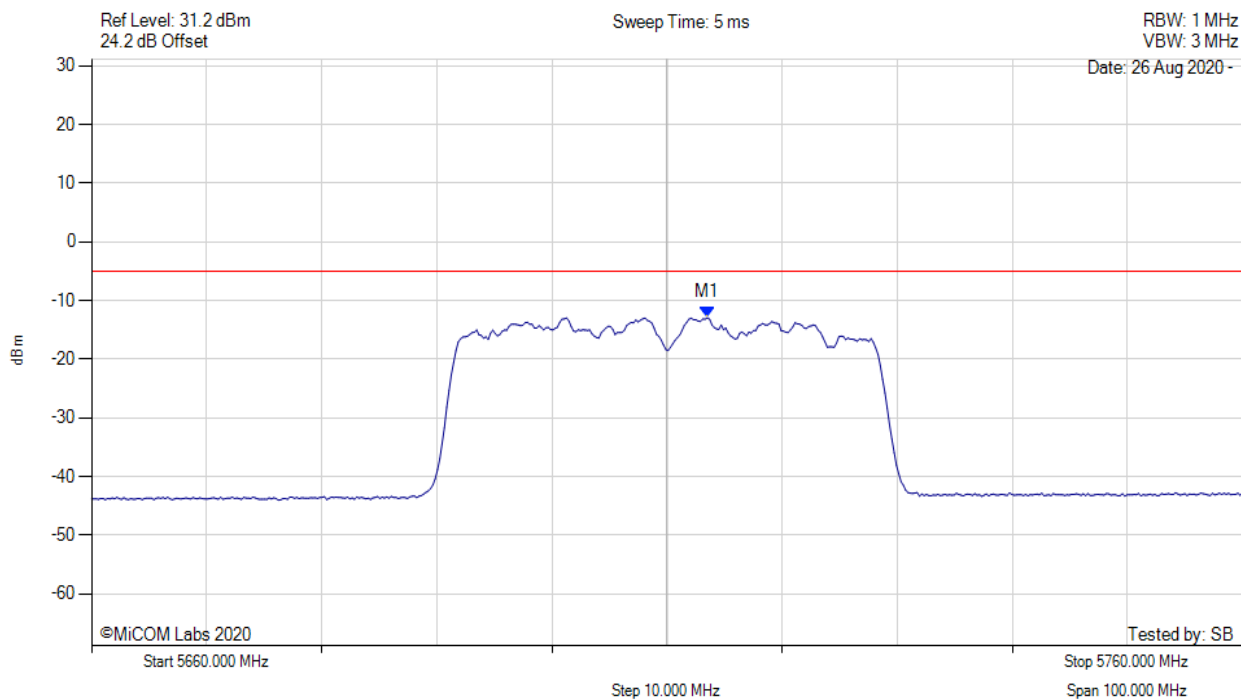


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5713.507 MHz : -12.909 dBm	Limit: ≤ -5.010 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: 20, Voltage: 48 Vdc

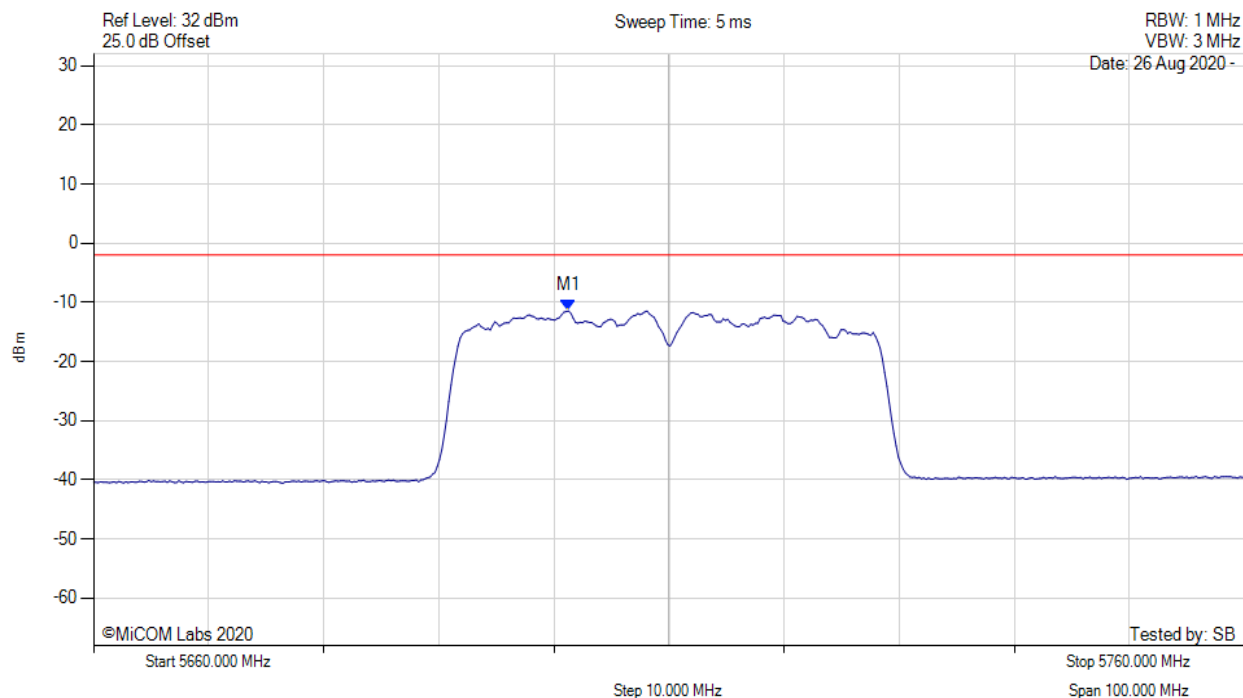

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5701.300 MHz : -11.446 dBm M1 + DCCF : 5701.300 MHz : -11.084 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ -2.0 dBm Margin: -9.1 dB

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com