


Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

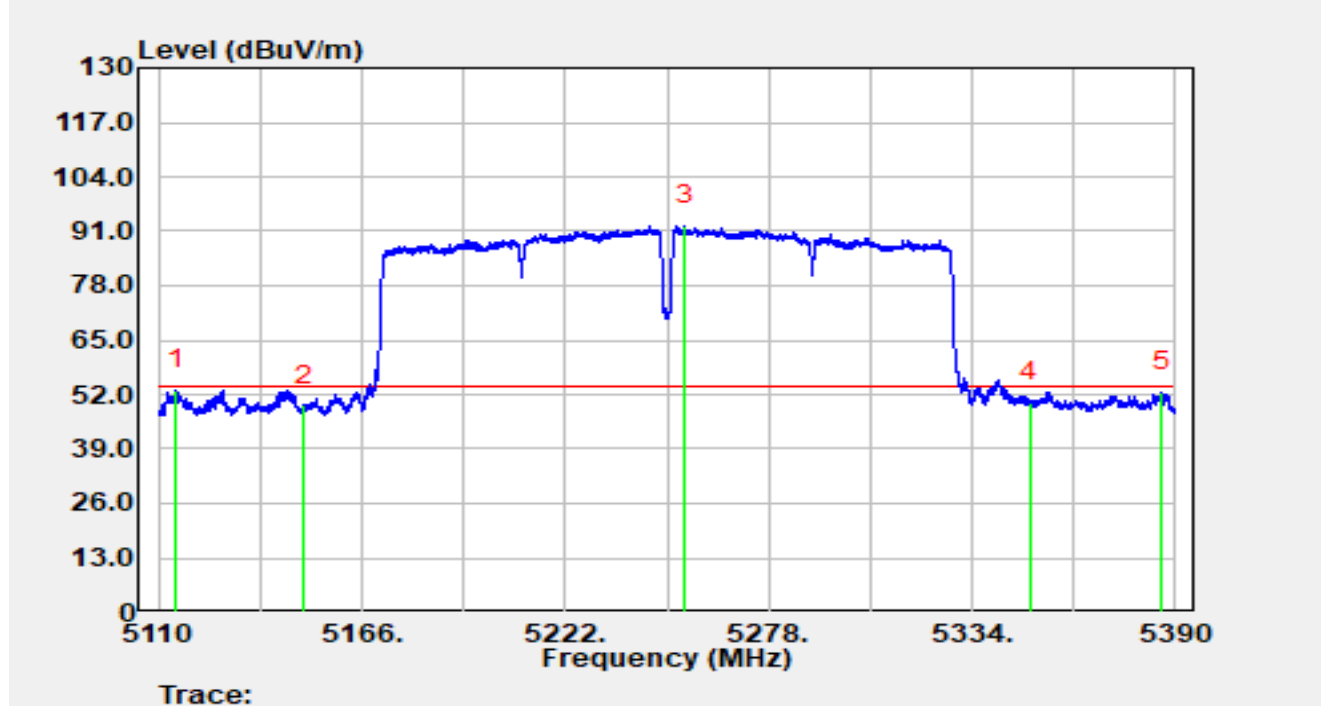


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5114.98	33.41	19.77	53.18	-0.82	54.00	Average
2		5150.00	29.93	19.43	49.36	-4.64	54.00	Average
3		5254.93	72.82	19.41	92.23	N/A	N/A	Average
4		5350.00	30.28	19.85	50.13	-3.87	54.00	Average
5		5386.25	32.66	19.92	52.58	-1.42	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

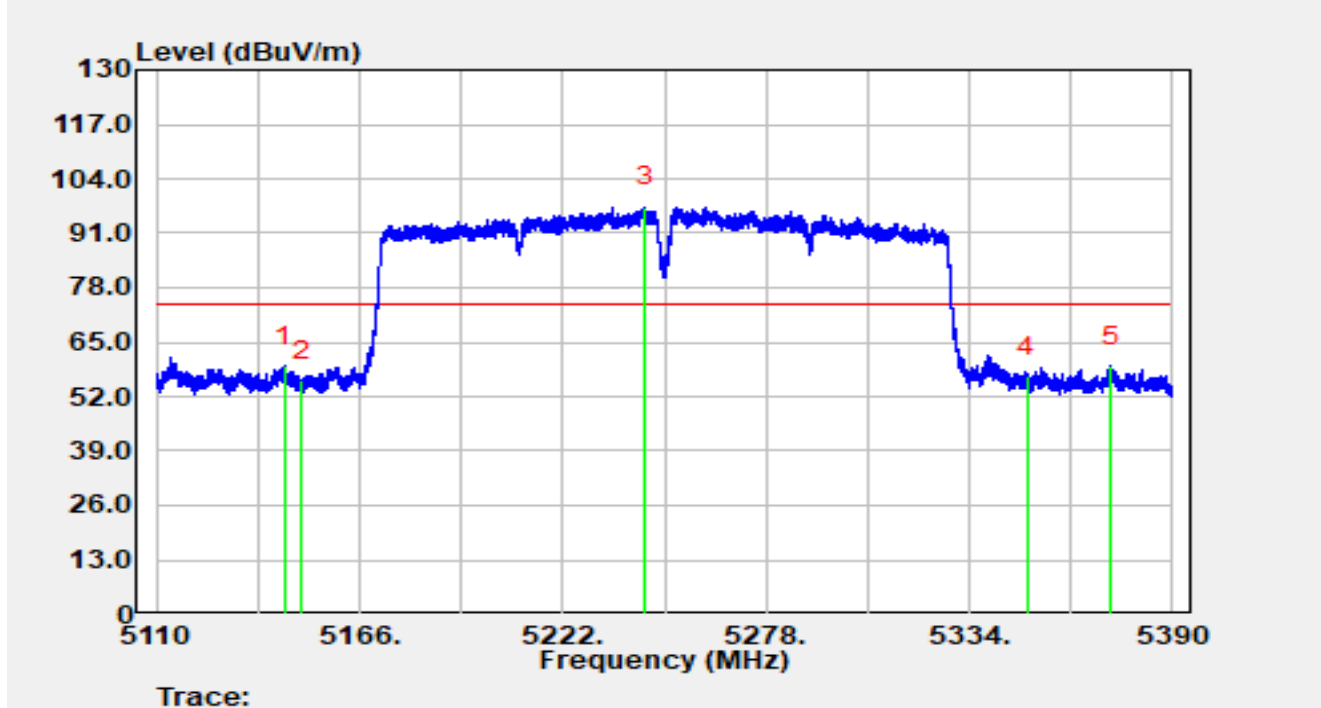


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.20	39.89	19.44	59.33	-14.67	74.00	Peak
2		5150.00	36.46	19.43	55.89	-18.11	74.00	Peak
3		5244.54	78.00	19.23	97.23	N/A	N/A	Peak
4		5350.00	37.00	19.85	56.85	-17.15	74.00	Peak
5		5373.00	39.39	19.92	59.31	-14.69	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

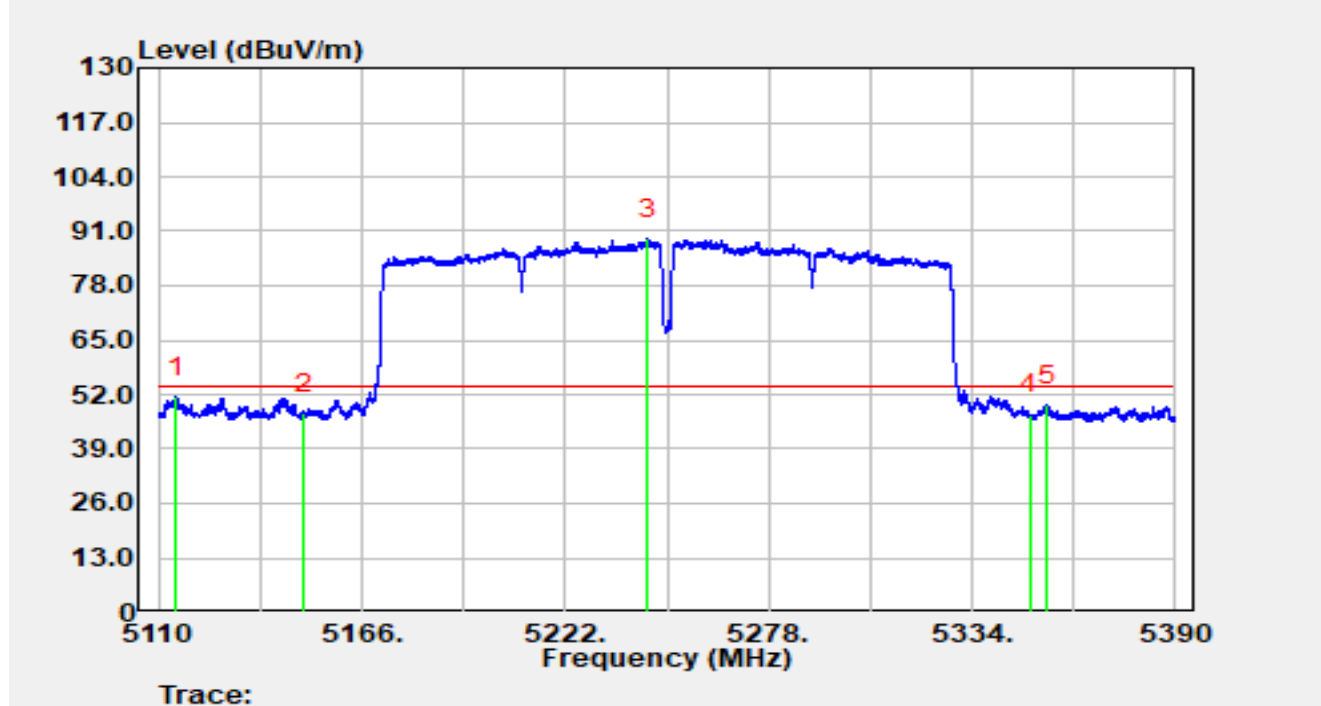


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5114.82	31.65	19.77	51.42	-2.58	54.00	Average
2		5150.00	28.01	19.43	47.44	-6.56	54.00	Average
3		5244.79	69.99	19.23	89.22	N/A	N/A	Average
4		5350.00	27.45	19.85	47.30	-6.70	54.00	Average
5		5354.86	29.61	19.89	49.50	-4.50	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

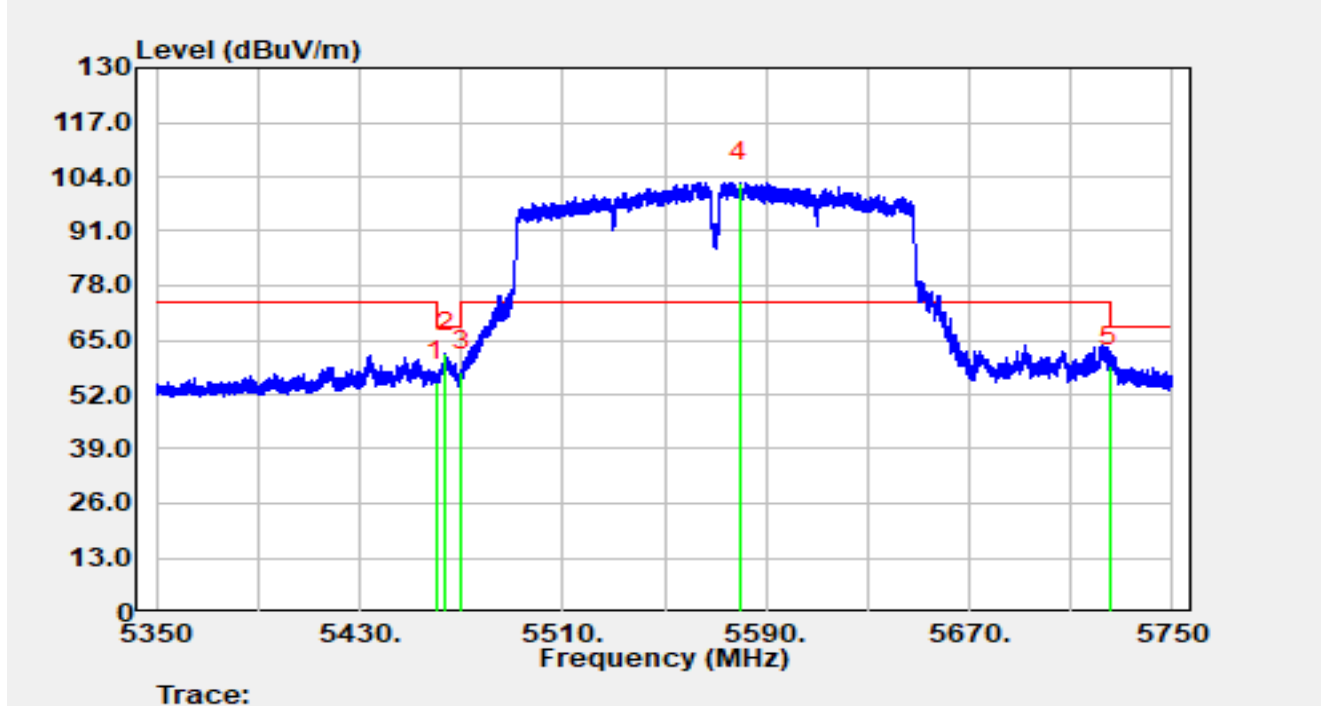


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.00	34.83	20.15	54.98	-13.22	68.20	Peak
2	*	5463.56	41.78	20.12	61.90	-6.30	68.20	Peak
3		5470.00	37.47	20.03	57.51	-10.69	68.20	Peak
4		5579.40	82.59	20.09	102.68	N/A	N/A	Peak
5		5725.00	37.37	21.34	58.71	-9.49	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (4) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

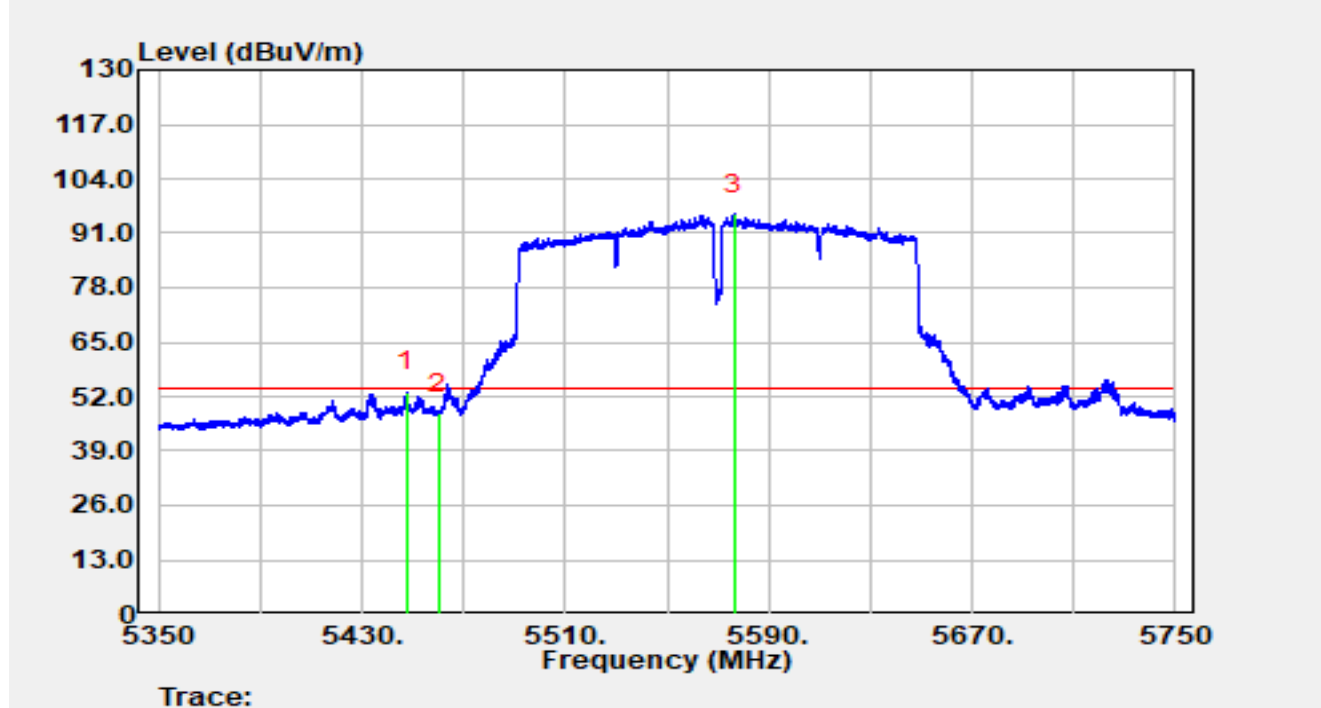


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.56	32.90	20.11	53.01	-0.99	54.00	Average
2		5460.00	27.73	20.15	47.88	-6.12	54.00	Average
3		5576.28	75.46	20.10	95.57	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

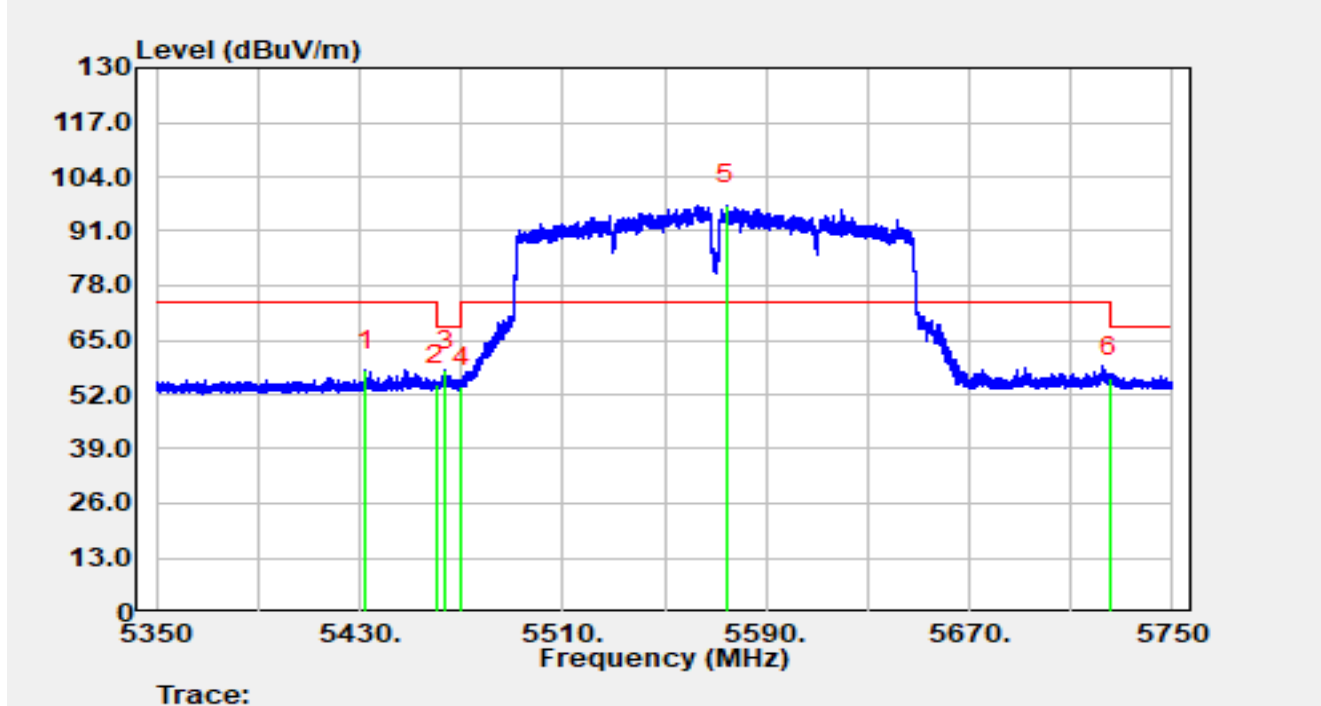


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.36	37.81	19.94	57.75	-16.25	74.00	Peak
2		5460.00	34.10	20.15	54.25	-13.95	68.20	Peak
3	*	5463.84	37.76	20.11	57.87	-10.33	68.20	Peak
4		5470.00	33.90	20.03	53.93	-14.27	68.20	Peak
5		5574.40	77.24	20.11	97.35	N/A	N/A	Peak
6		5725.00	34.77	21.34	56.11	-12.09	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHzP=17		

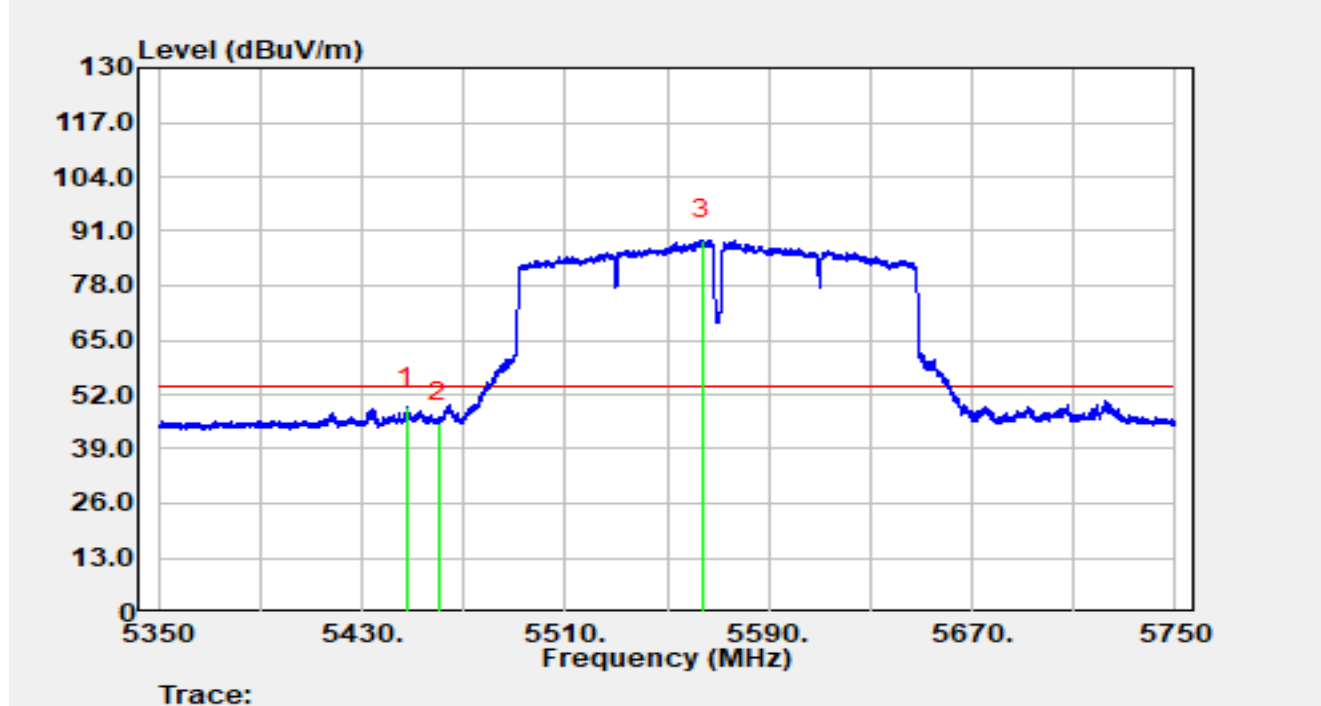


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.60	28.73	20.11	48.84	-5.16	54.00	Average
2		5460.00	25.13	20.15	45.28	-8.72	54.00	Average
3		5564.12	68.83	20.16	88.99	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

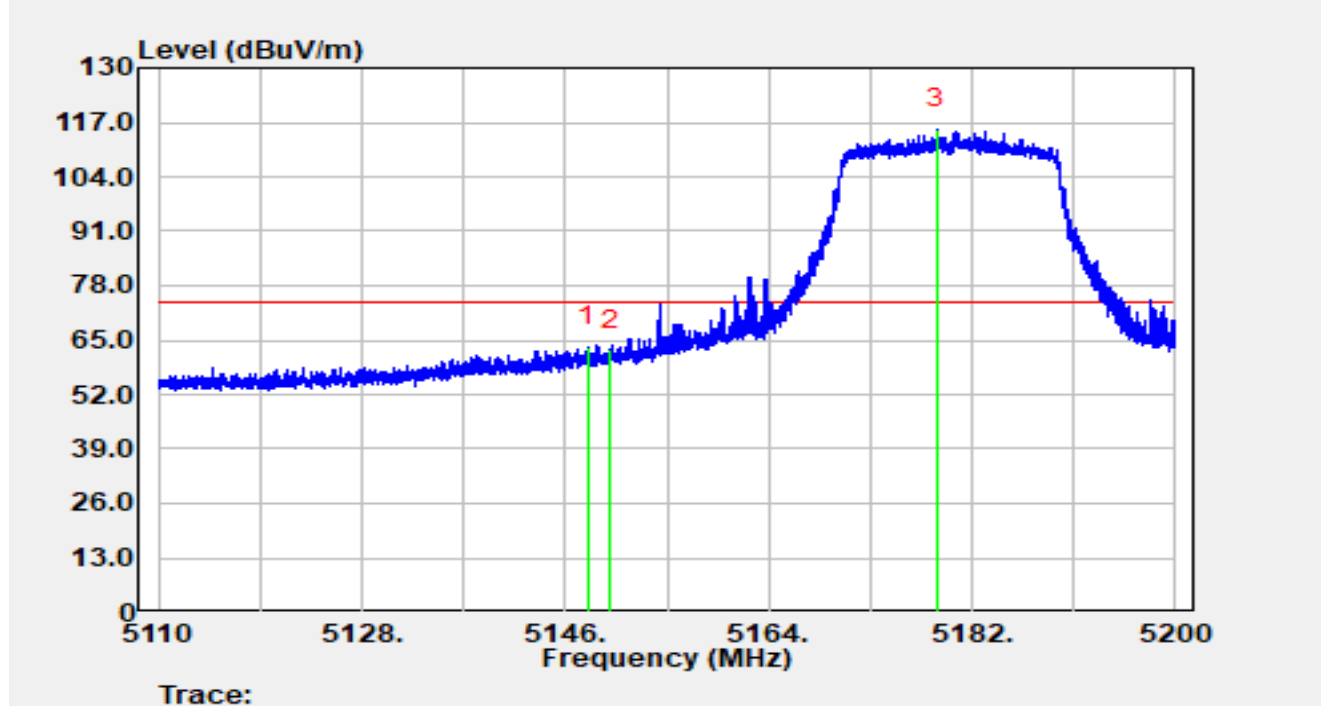


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.95	44.09	19.43	63.52	-10.48	74.00	Peak
2		5150.00	43.25	19.43	62.68	-11.32	74.00	Peak
3		5178.86	95.52	19.78	115.30	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

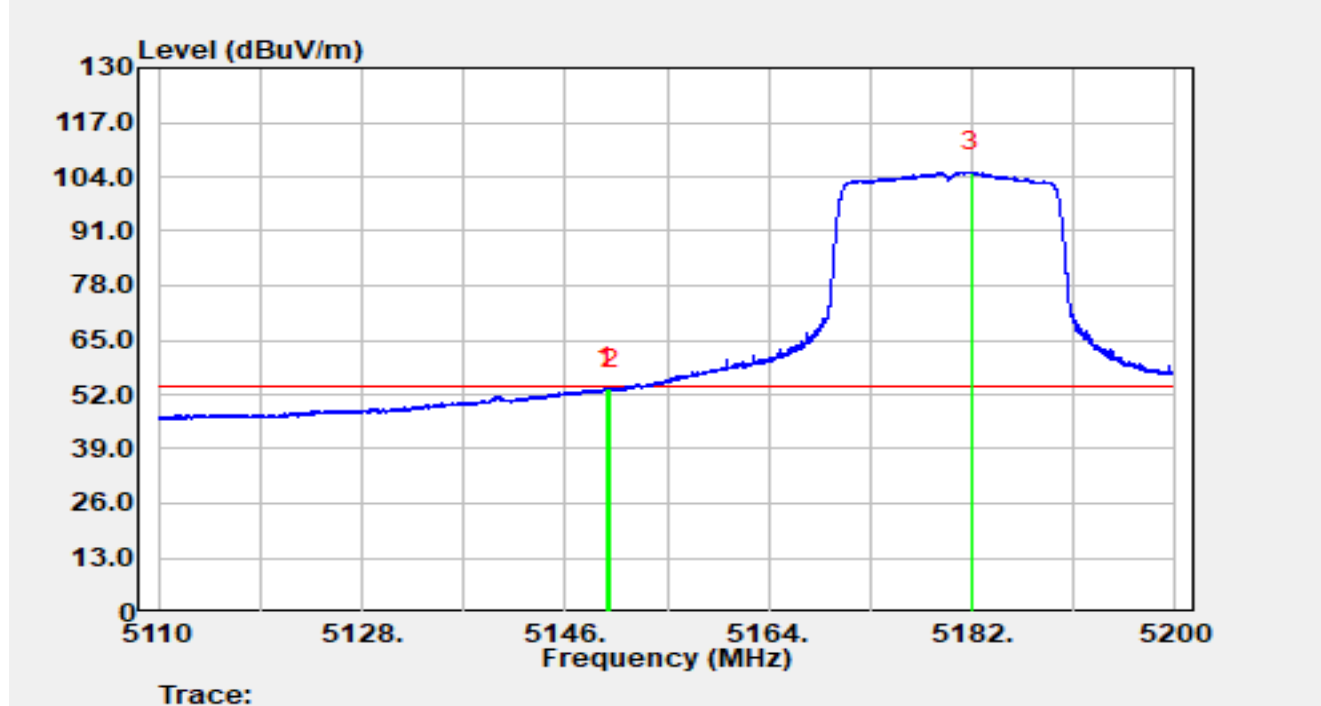


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.60	34.13	19.43	53.56	-0.44	54.00	Average
2		5150.00	33.81	19.43	53.24	-0.76	54.00	Average
3		5181.88	85.40	19.81	105.20	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

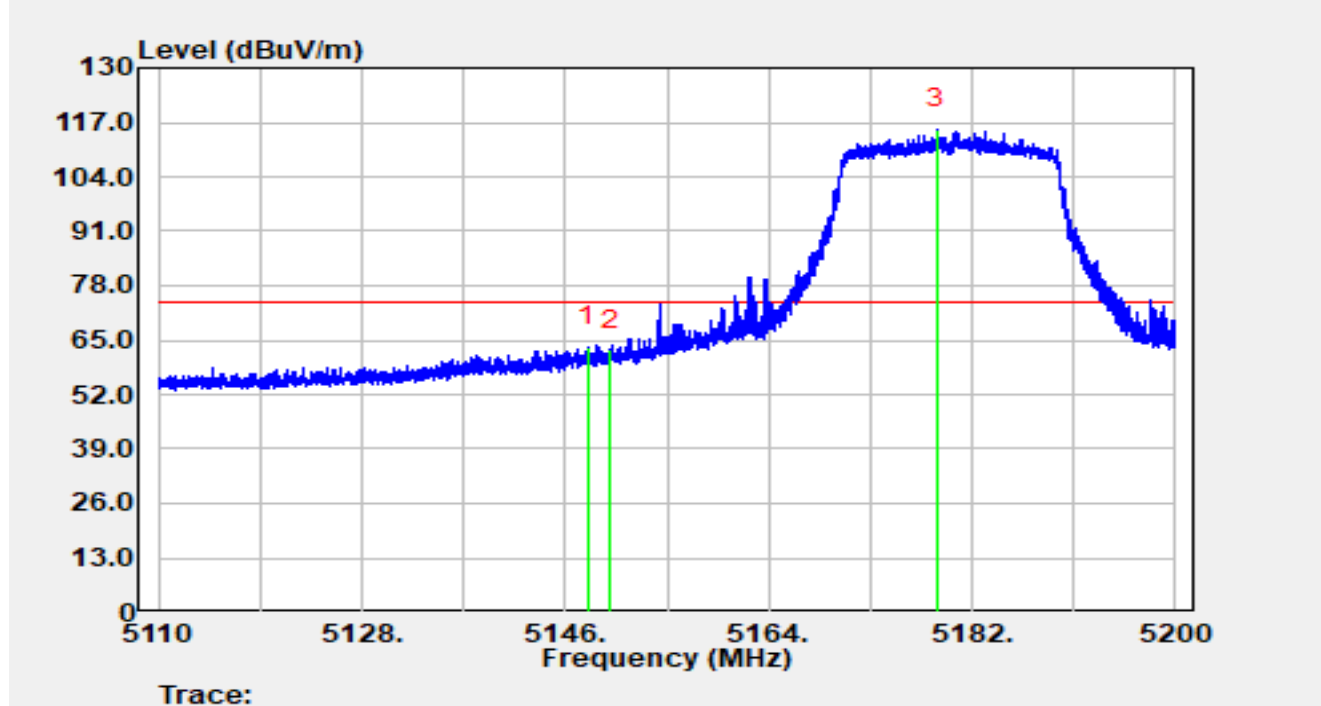


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.95	44.09	19.43	63.52	-10.48	74.00	Peak
2		5150.00	43.25	19.43	62.68	-11.32	74.00	Peak
3		5178.86	95.52	19.78	115.30	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

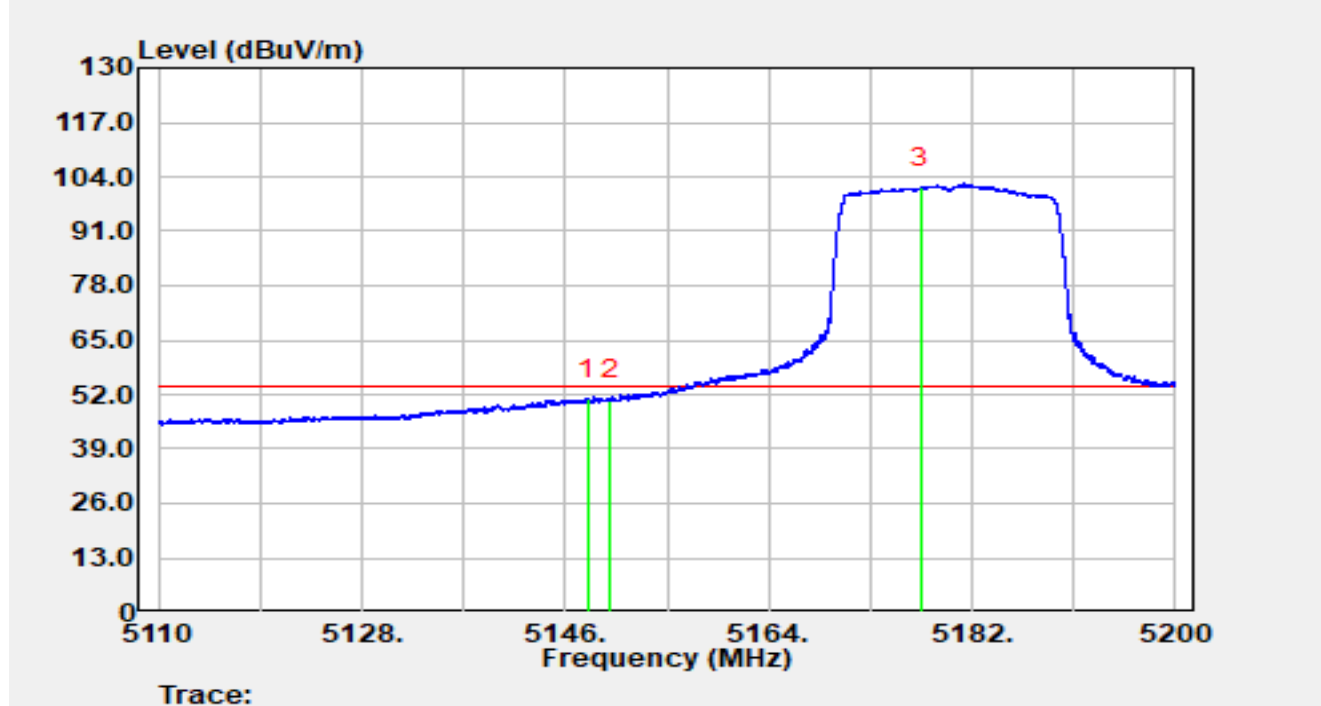


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.94	31.35	19.43	50.78	-3.22	54.00	Average
2		5150.00	31.19	19.43	50.62	-3.38	54.00	Average
3		5177.43	81.60	19.77	101.38	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

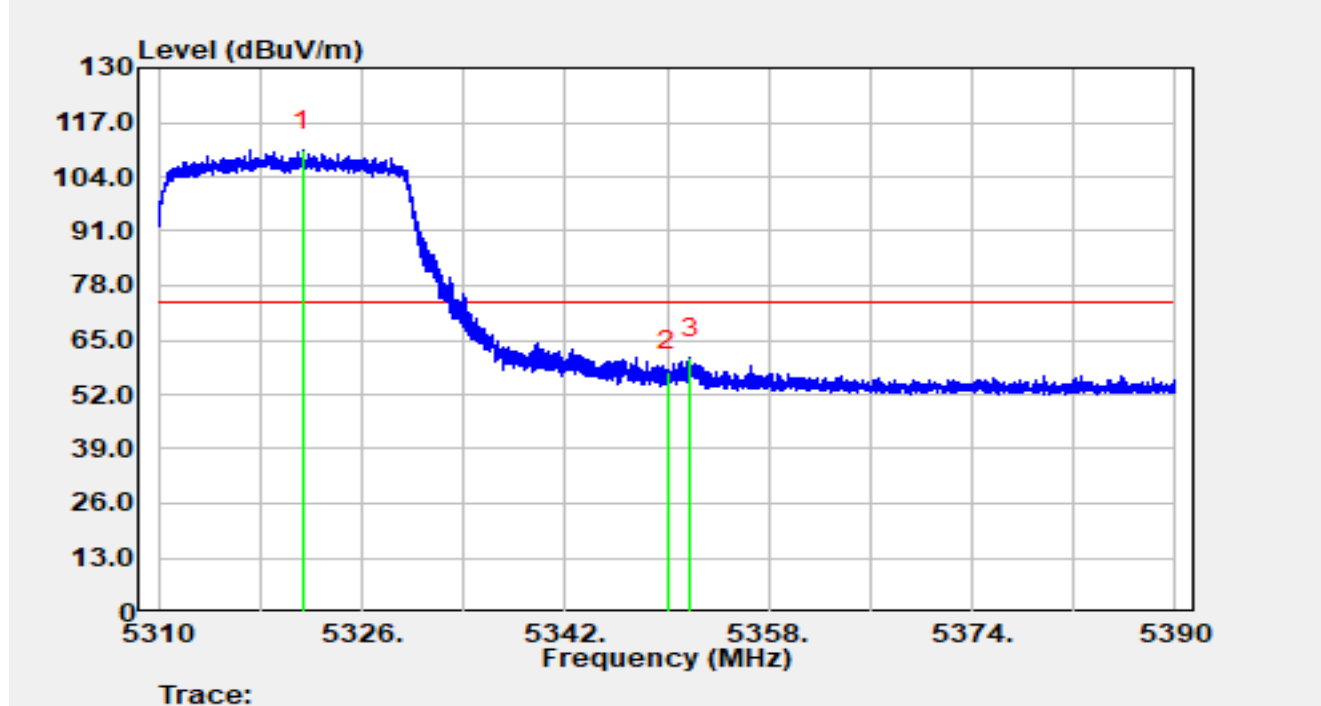


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.38	90.78	19.54	110.32	N/A	N/A	Peak
2		5350.00	37.78	19.85	57.63	-16.37	74.00	Peak
3	*	5351.83	40.92	19.87	60.78	-13.22	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

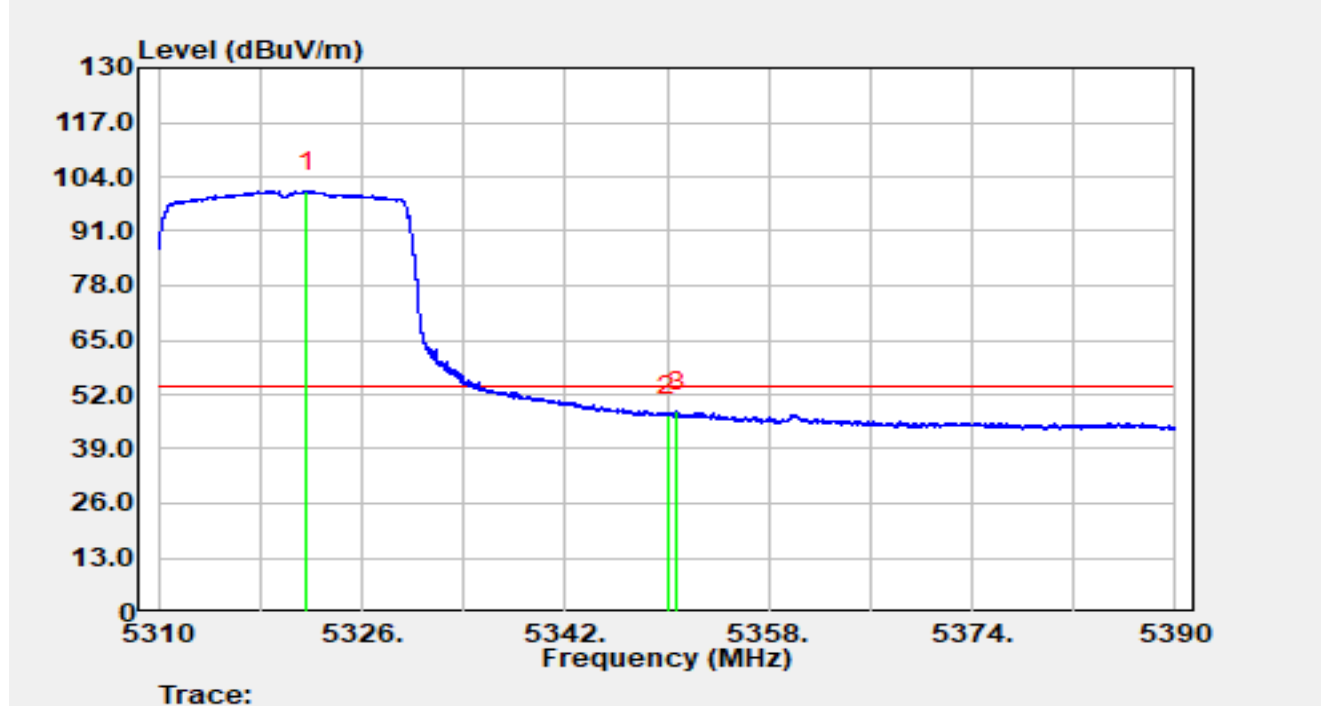


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.66	80.97	19.54	100.51	N/A	N/A	Average
2		5350.00	27.13	19.85	46.98	-7.02	54.00	Average
3	*	5350.82	28.08	19.86	47.94	-6.06	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

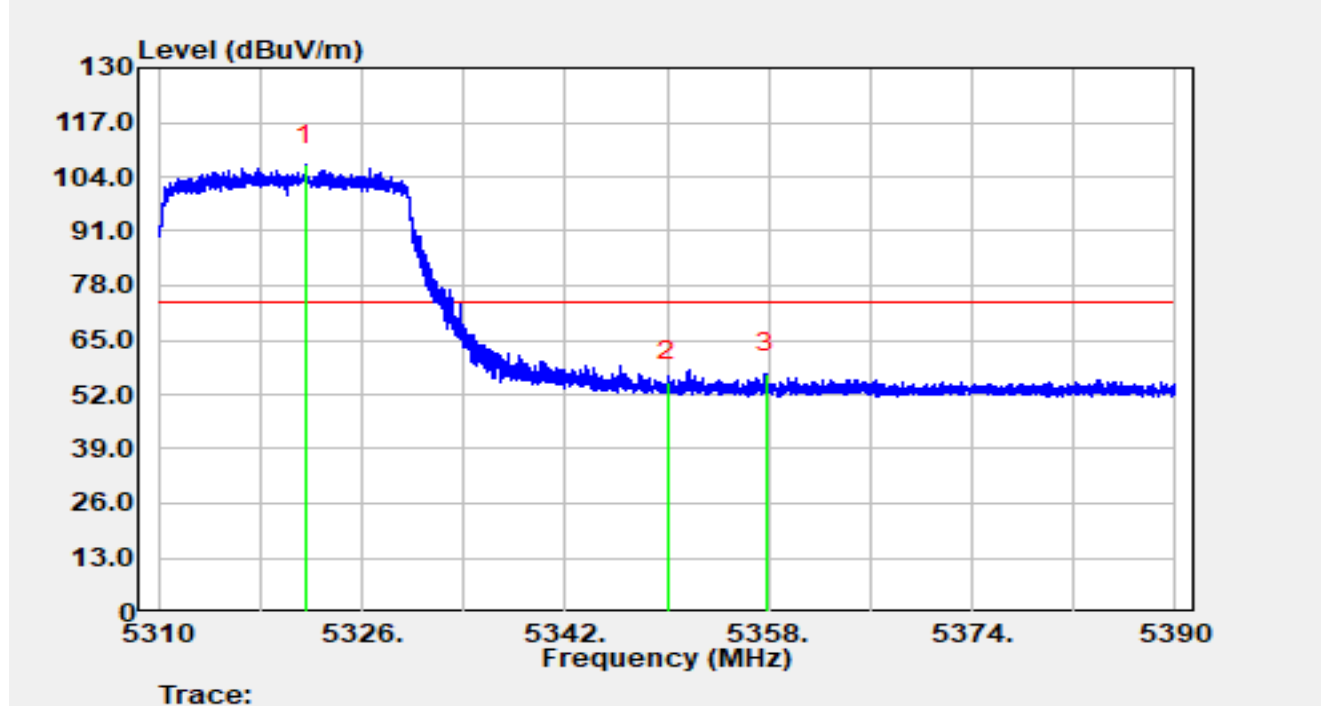


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.54	87.22	19.54	106.77	N/A	N/A	Peak
2		5350.00	35.14	19.85	54.99	-19.01	74.00	Peak
3	*	5357.76	37.21	19.92	57.12	-16.88	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

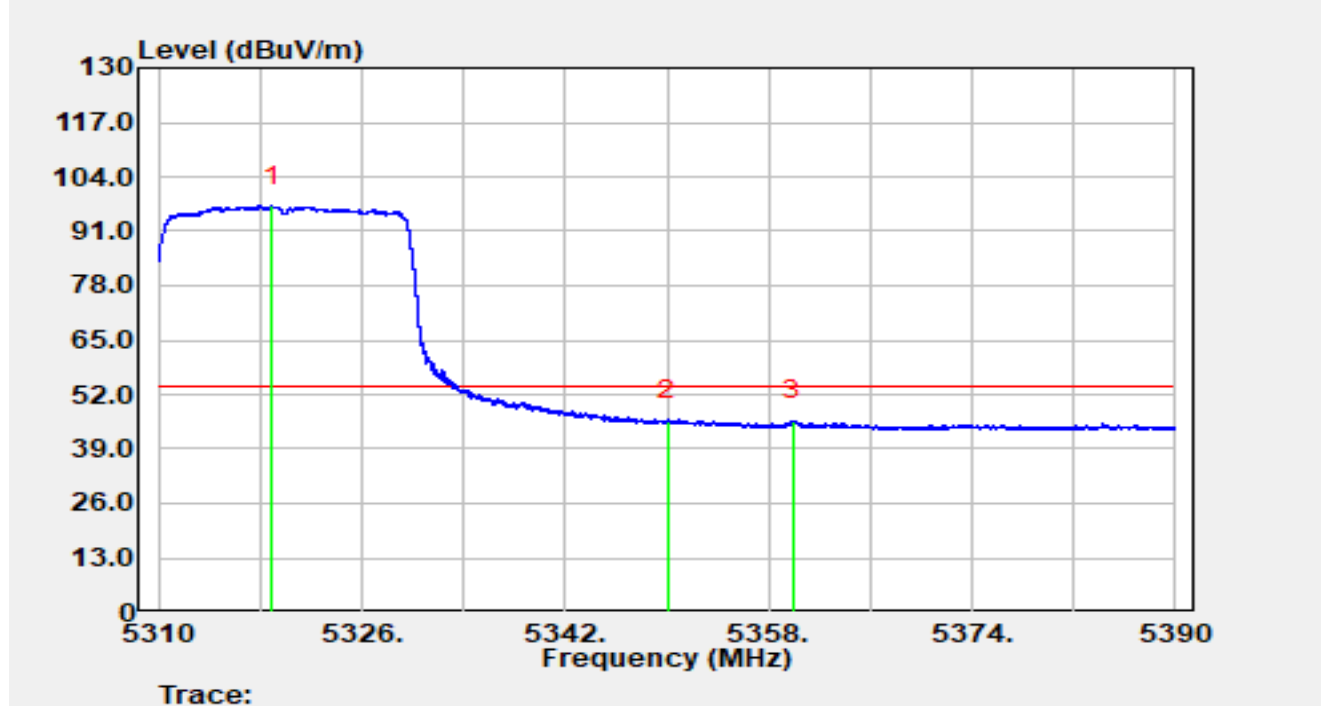


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.91	77.47	19.53	97.00	N/A	N/A	Average
2		5350.00	25.93	19.85	45.78	-8.22	54.00	Average
3	*	5359.94	25.88	19.91	45.79	-8.21	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

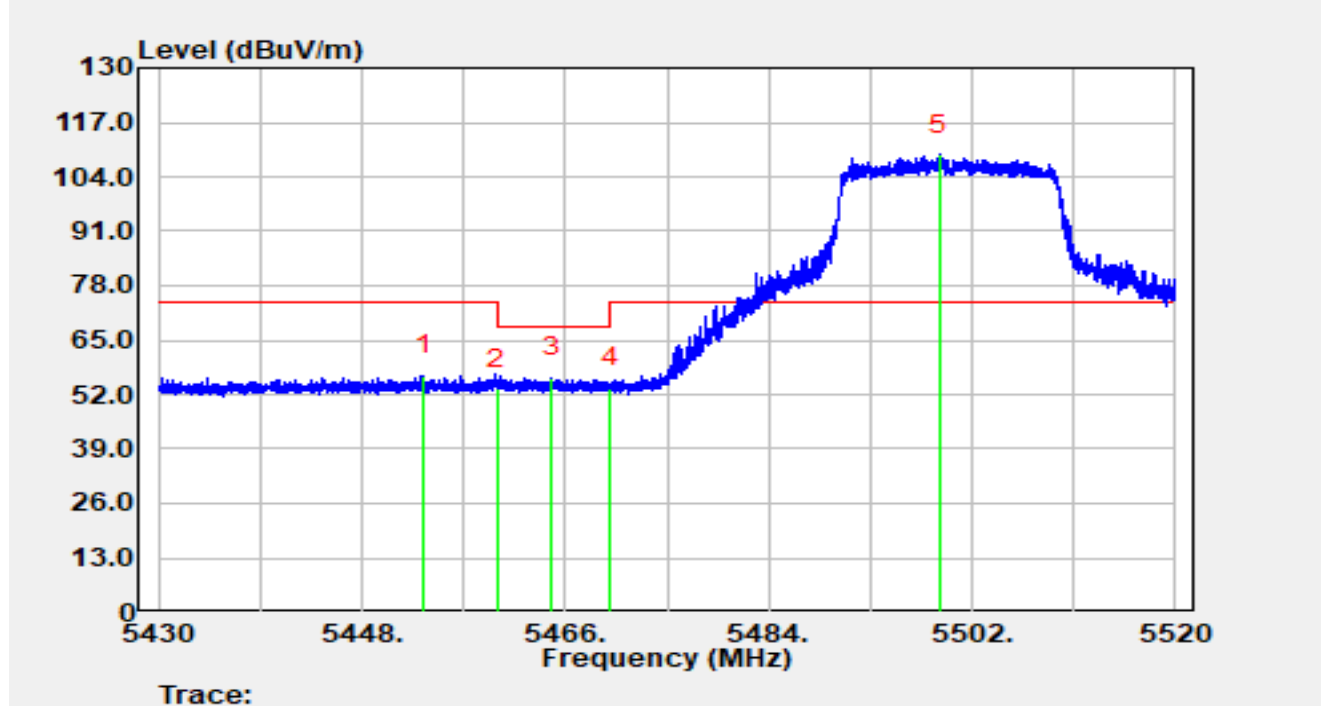


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.46	36.49	20.13	56.62	-17.38	74.00	Peak
2		5460.00	33.15	20.15	53.30	-14.90	68.20	Peak
3	*	5464.83	35.97	20.10	56.07	-12.13	68.20	Peak
4		5470.00	33.51	20.03	53.55	-14.65	68.20	Peak
5		5499.08	89.67	19.67	109.34	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

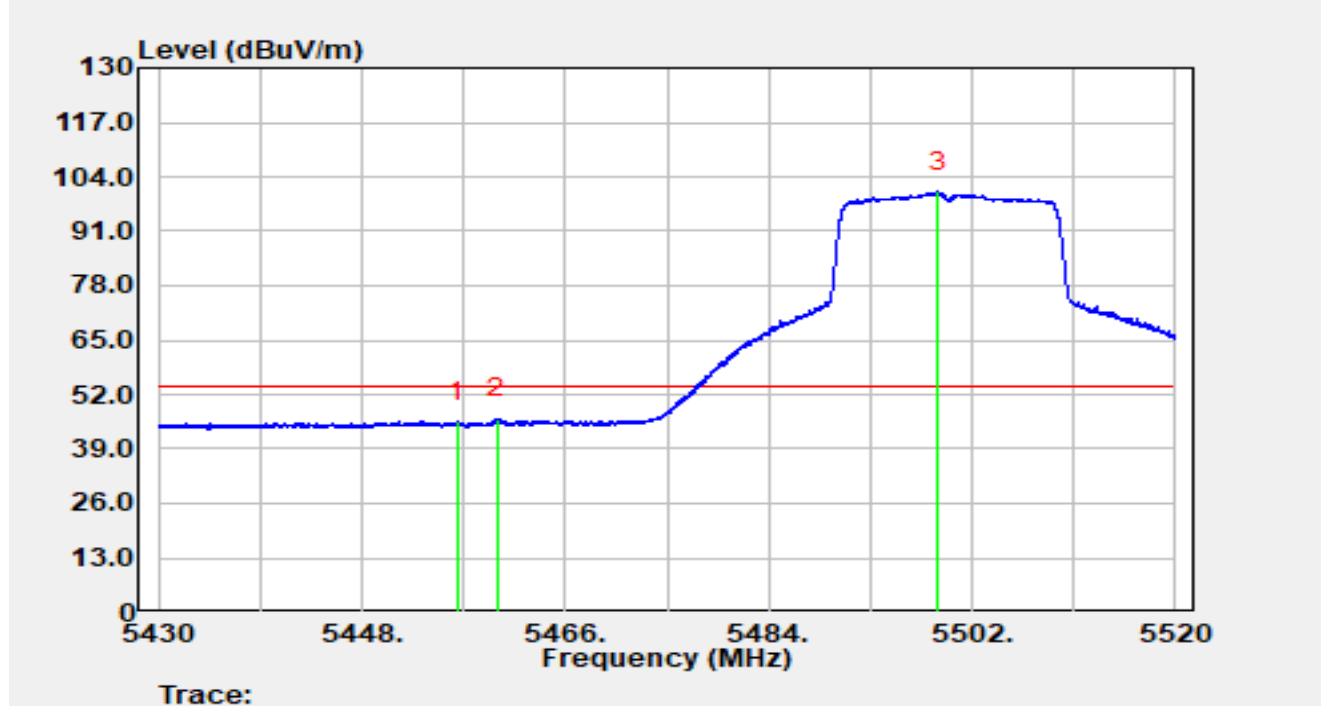


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.48	25.31	20.14	45.45	-8.55	54.00	Average
2	*	5460.00	26.16	20.15	46.30	-7.70	54.00	Average
3		5498.97	80.83	19.67	100.50	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

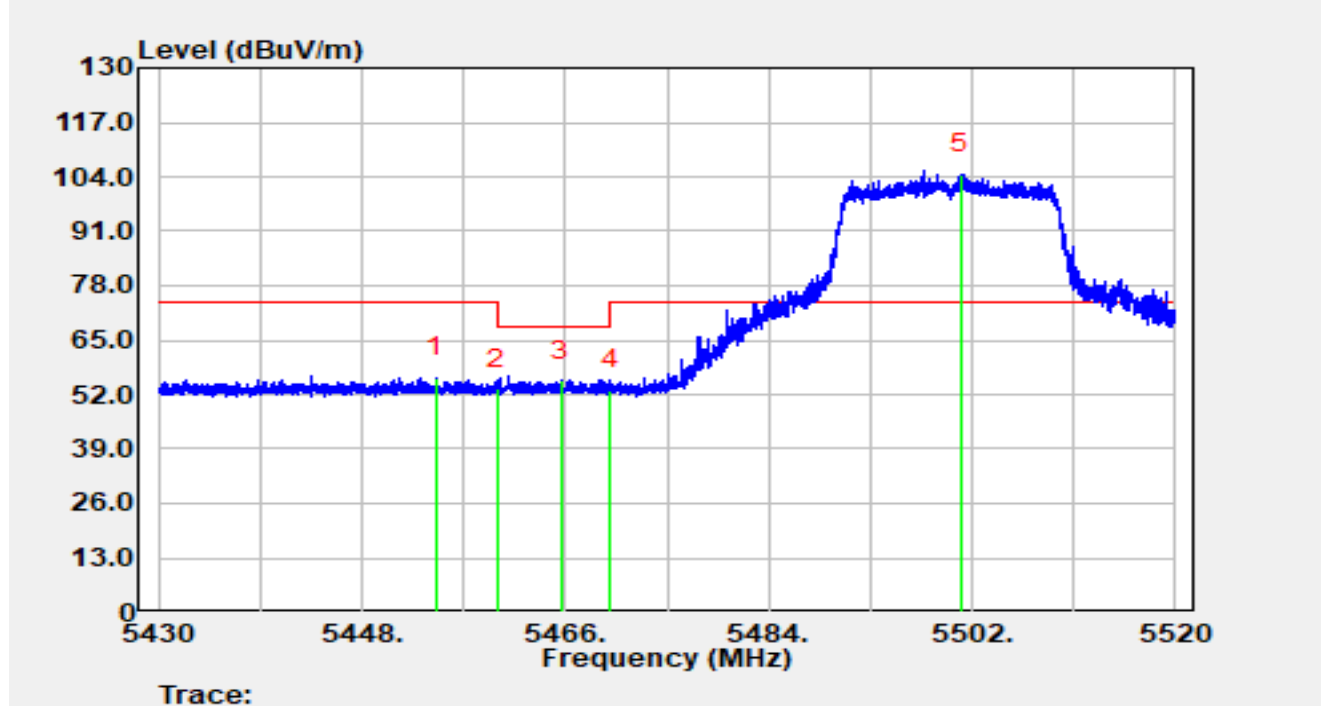


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.61	35.97	20.13	56.11	-17.89	74.00	Peak
2		5460.00	33.12	20.15	53.27	-14.93	68.20	Peak
3	*	5465.62	35.28	20.09	55.37	-12.83	68.20	Peak
4		5470.00	33.07	20.03	53.10	-15.10	68.20	Peak
5		5500.95	84.86	19.68	104.54	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

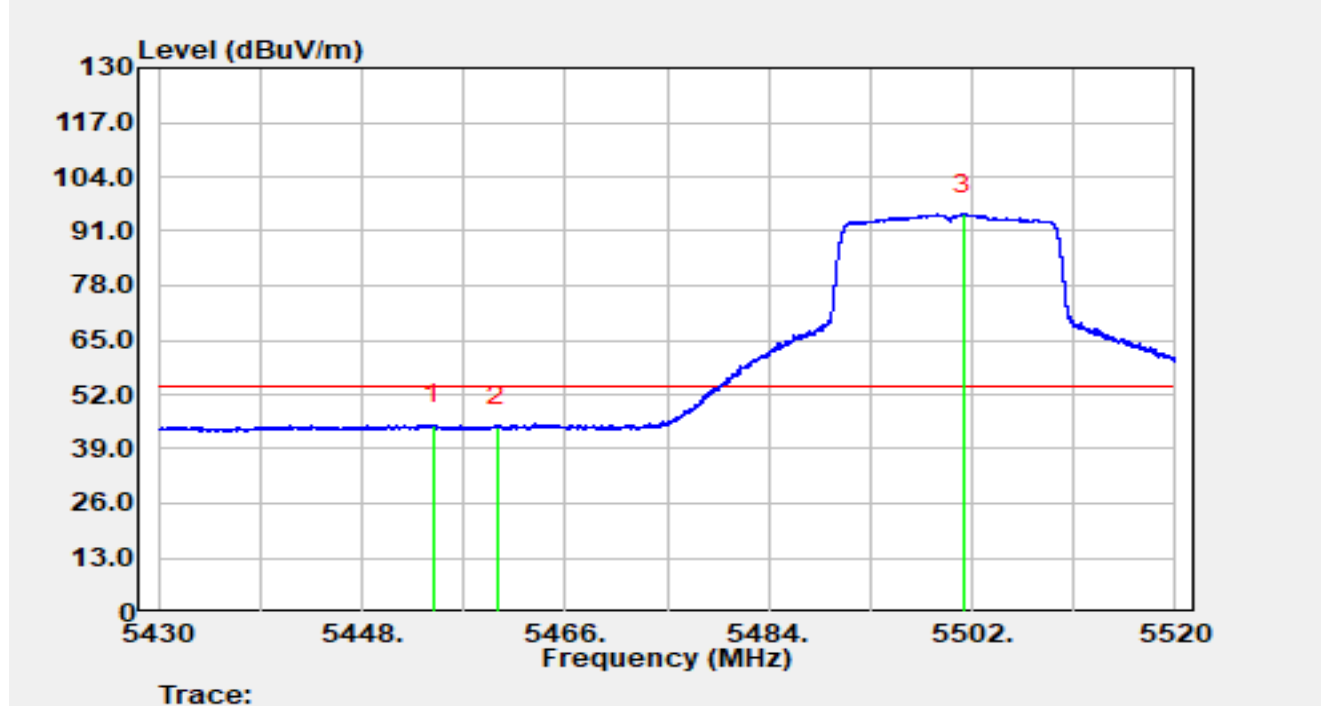


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.30	24.66	20.13	44.79	-9.21	54.00	Average
2		5460.00	24.23	20.15	44.37	-9.63	54.00	Average
3		5501.21	75.39	19.68	95.07	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5700MHz		

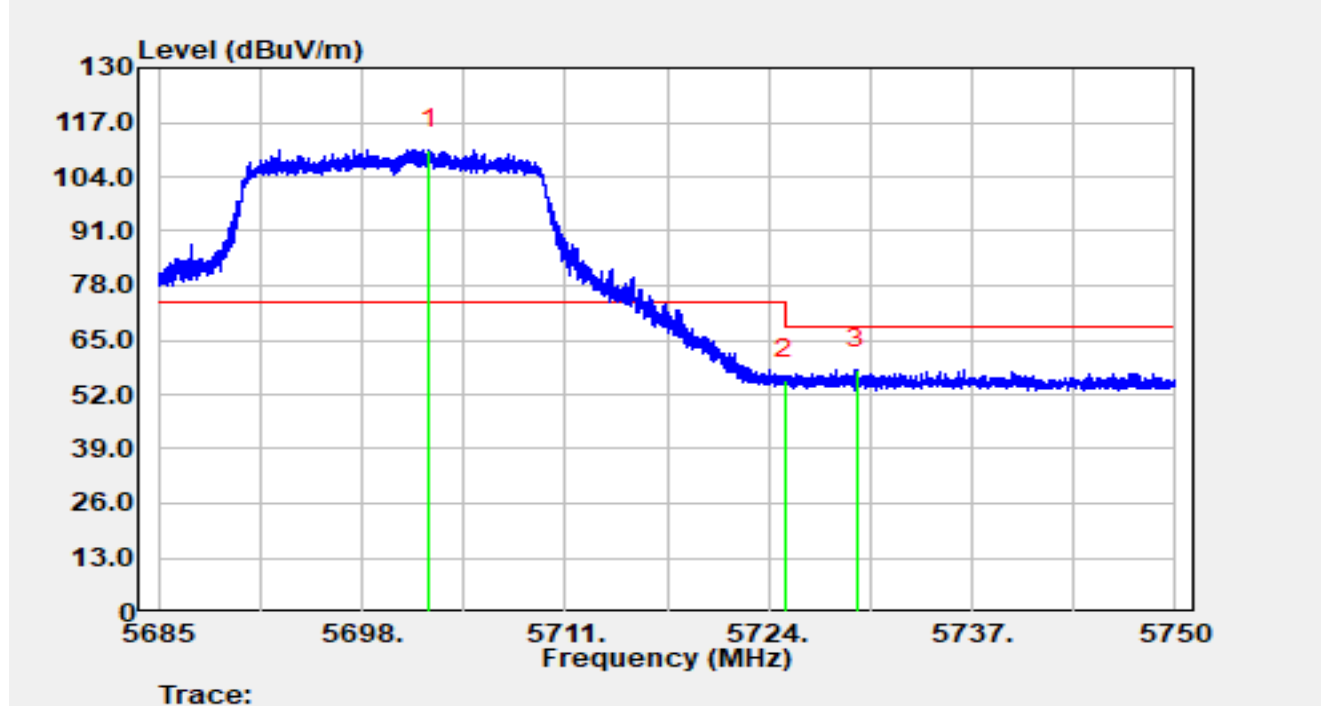


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.32	89.38	21.14	110.52	N/A	N/A	Peak
2		5725.00	34.31	21.34	55.65	-12.55	68.20	Peak
3	*	5729.59	36.62	21.32	57.93	-10.27	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5700MHz		

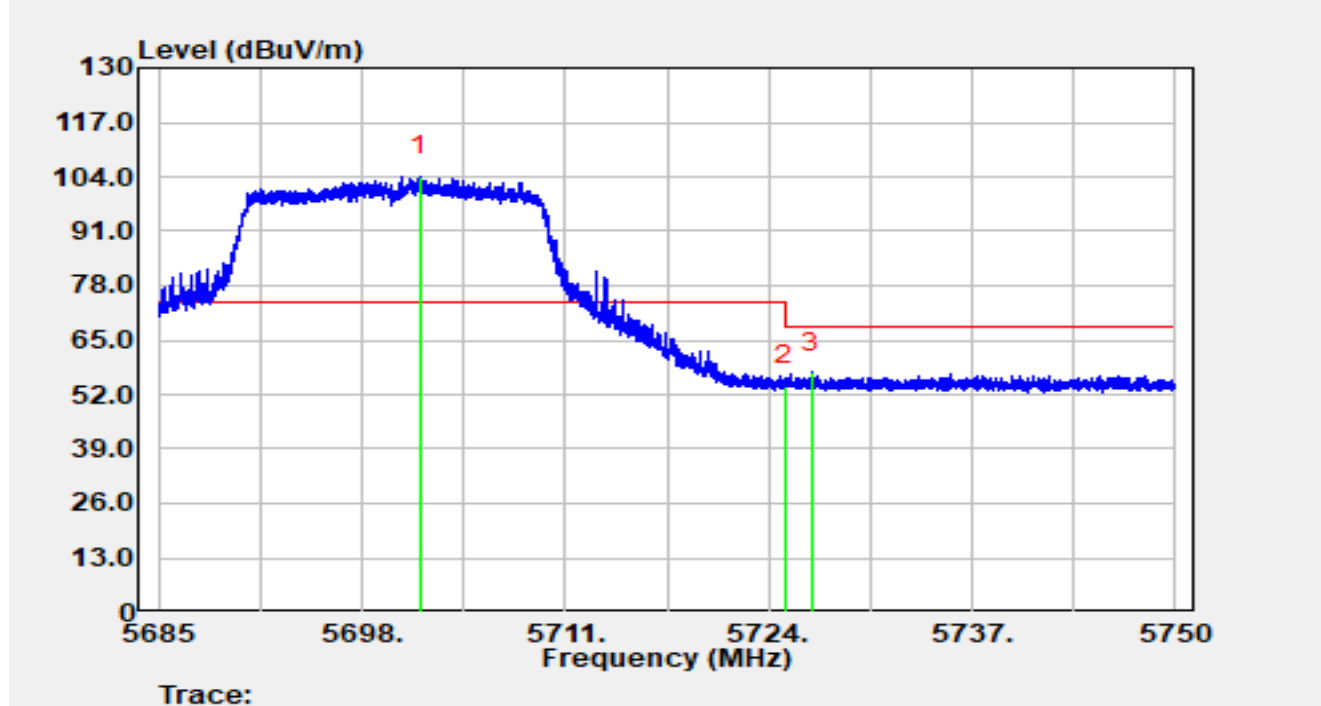


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.67	82.98	21.13	104.11	N/A	N/A	Peak
2		5725.00	32.77	21.34	54.11	-14.09	68.20	Peak
3	*	5726.74	35.92	21.33	57.25	-10.95	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5745MHz		

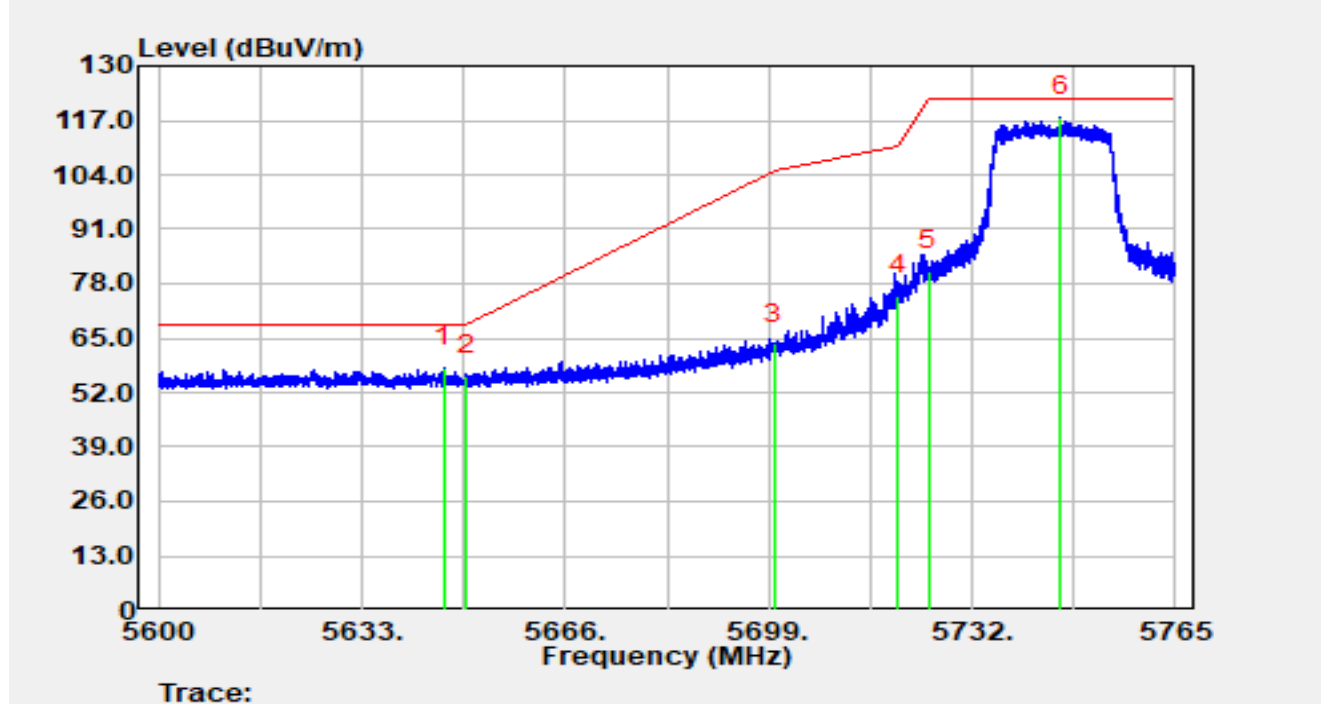


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.33	37.44	20.67	58.11	-10.09	68.20	Peak
2		5650.00	35.34	20.63	55.97	-12.23	68.20	Peak
3		5700.00	42.48	21.09	63.56	-41.64	105.20	Peak
4		5720.00	53.71	21.36	75.08	-35.72	110.80	Peak
5		5725.00	59.63	21.34	80.97	-41.23	122.20	Peak
6		5746.37	96.74	21.18	117.92	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5745MHz		

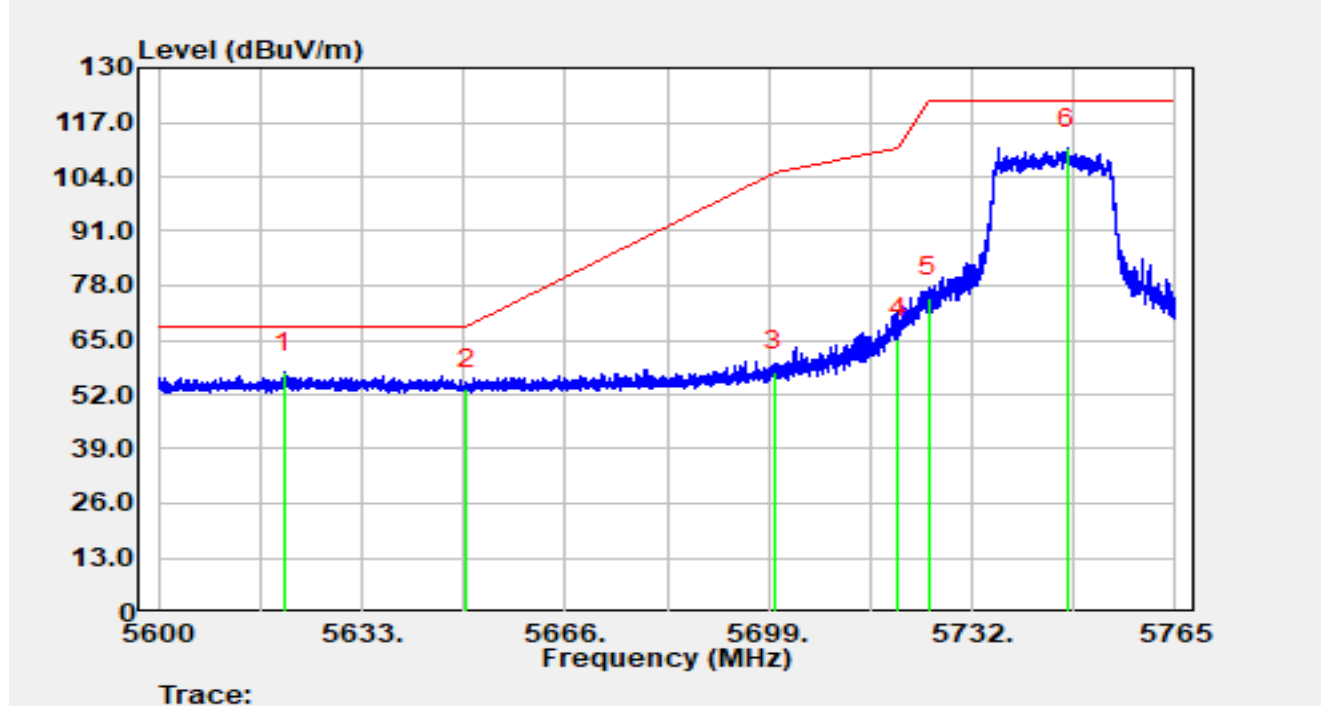


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.30	36.46	20.73	57.18	-11.02	68.20	Peak
2		5650.00	32.66	20.63	53.29	-14.91	68.20	Peak
3		5700.00	36.51	21.09	57.60	-47.60	105.20	Peak
4		5720.00	44.10	21.36	65.46	-45.34	110.80	Peak
5		5725.00	53.77	21.34	75.11	-47.09	122.20	Peak
6		5747.48	89.55	21.17	110.71	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5825MHz		

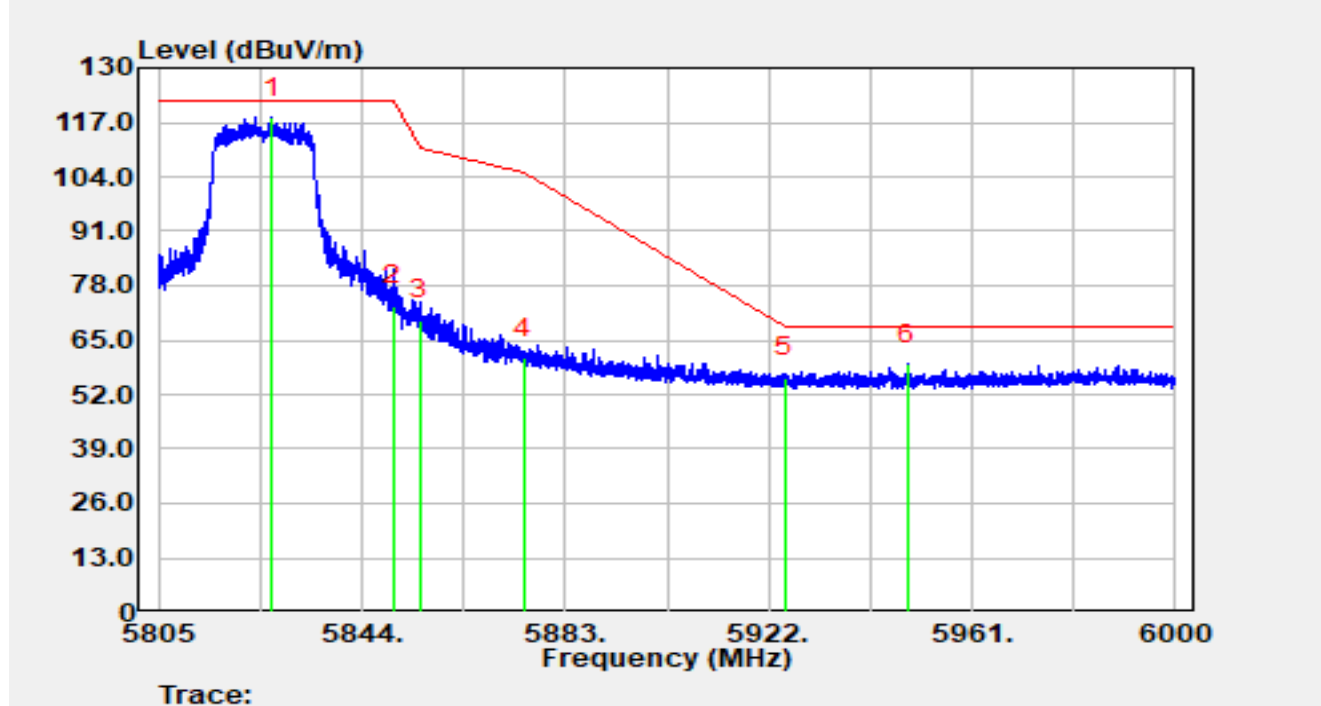


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.74	96.53	21.52	118.05	N/A	N/A	Peak
2		5850.00	51.78	21.33	73.11	-49.09	122.20	Peak
3		5855.00	48.53	21.33	69.86	-40.94	110.80	Peak
4		5875.00	39.05	21.59	60.64	-44.56	105.20	Peak
5		5925.00	34.46	21.49	55.96	-12.24	68.20	Peak
6	*	5948.54	37.66	21.54	59.19	-9.01	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	24.4 °C	Humidity	44.0 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5825MHz		

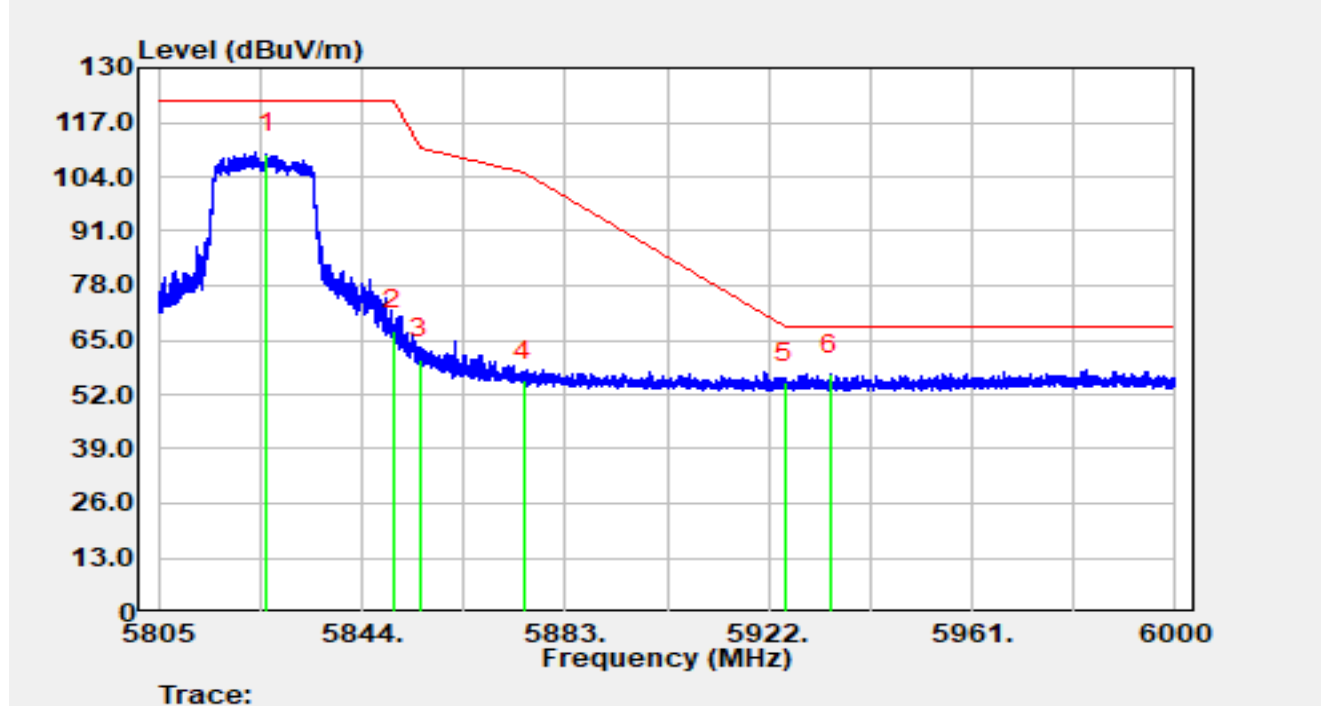


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.69	87.95	21.53	109.48	N/A	N/A	Peak
2		5850.00	45.98	21.33	67.31	-54.89	122.20	Peak
3		5855.00	39.24	21.33	60.56	-50.24	110.80	Peak
4		5875.00	33.82	21.59	55.42	-49.78	105.20	Peak
5		5925.00	33.39	21.49	54.88	-13.32	68.20	Peak
6	*	5933.90	35.21	21.47	56.68	-11.52	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

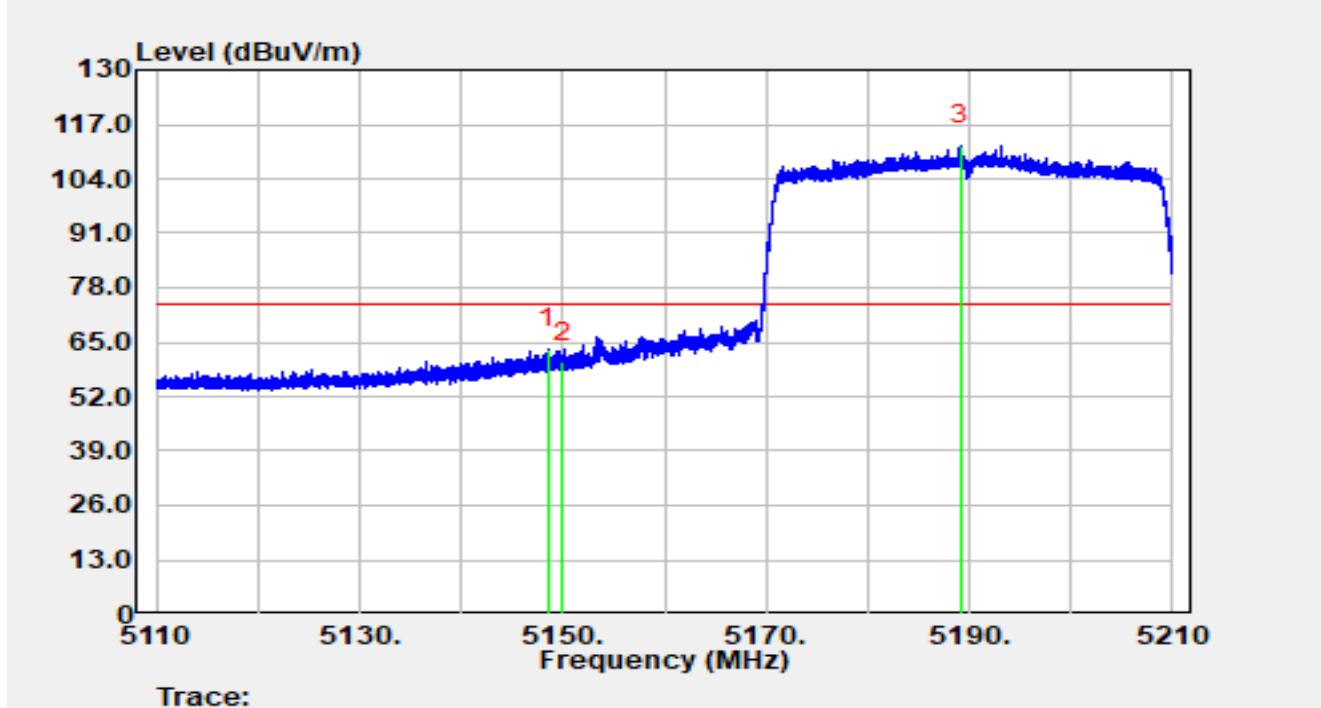


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.60	43.92	19.43	63.36	-10.64	74.00	Peak
2		5150.00	40.68	19.43	60.11	-13.89	74.00	Peak
3		5189.09	92.05	19.81	111.85	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

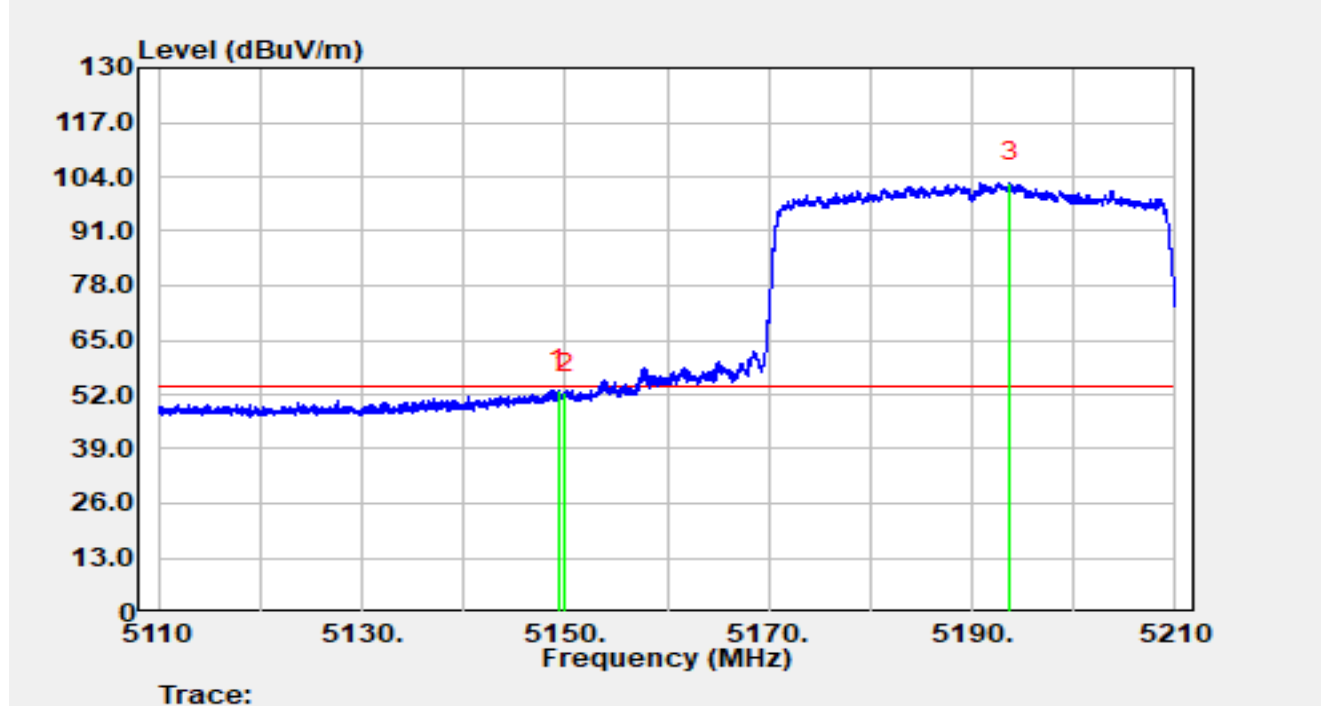


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.30	33.67	19.43	53.10	-0.90	54.00	Average
2		5150.00	32.82	19.43	52.25	-1.75	54.00	Average
3		5193.72	82.81	19.76	102.57	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

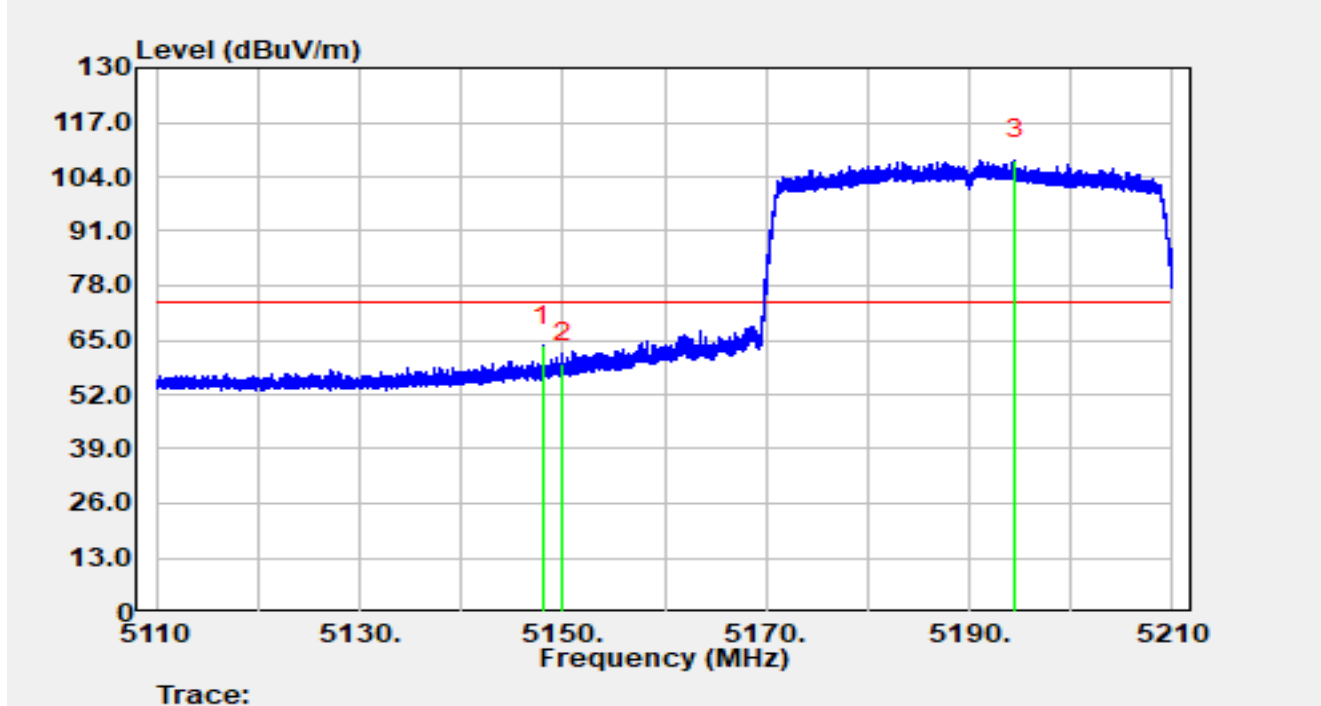


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.04	44.22	19.43	63.66	-10.34	74.00	Peak
2		5150.00	40.11	19.43	59.54	-14.46	74.00	Peak
3		5194.46	88.24	19.75	107.99	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

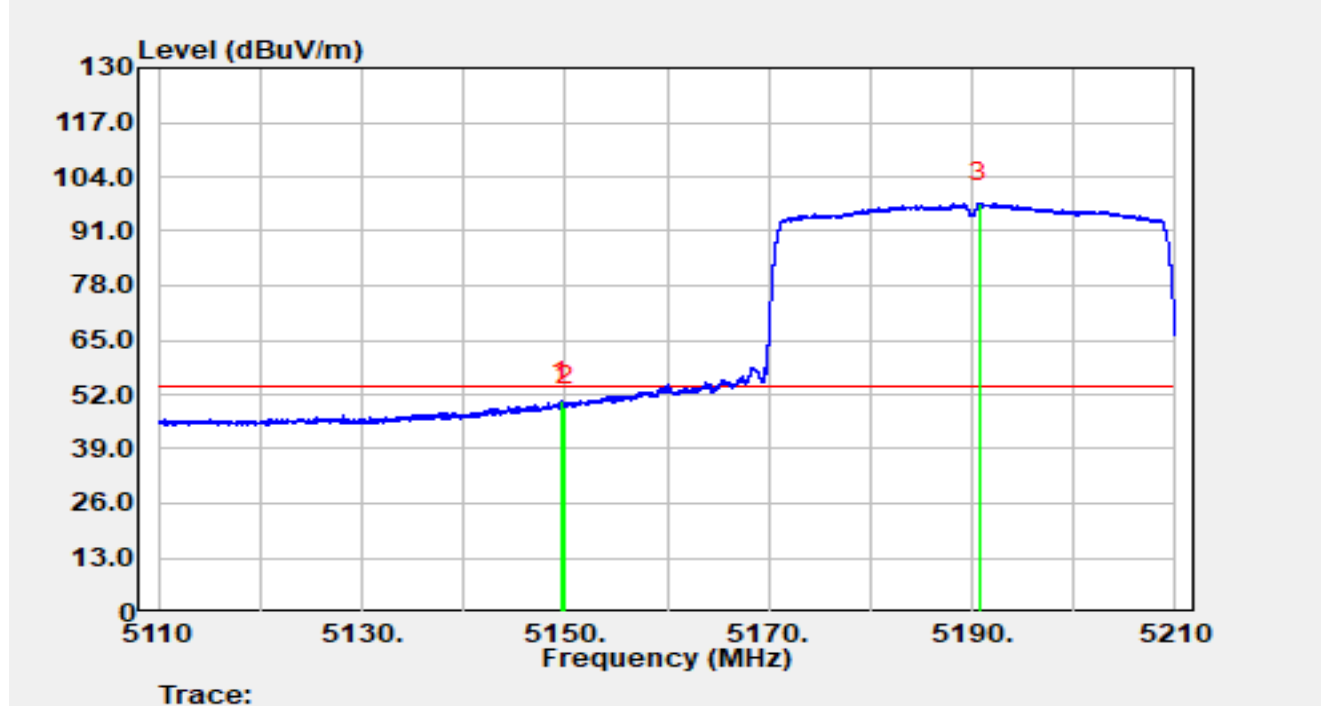


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.62	30.93	19.43	50.36	-3.64	54.00	Average
2		5150.00	29.82	19.43	49.25	-4.75	54.00	Average
3		5190.67	77.87	19.79	97.66	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

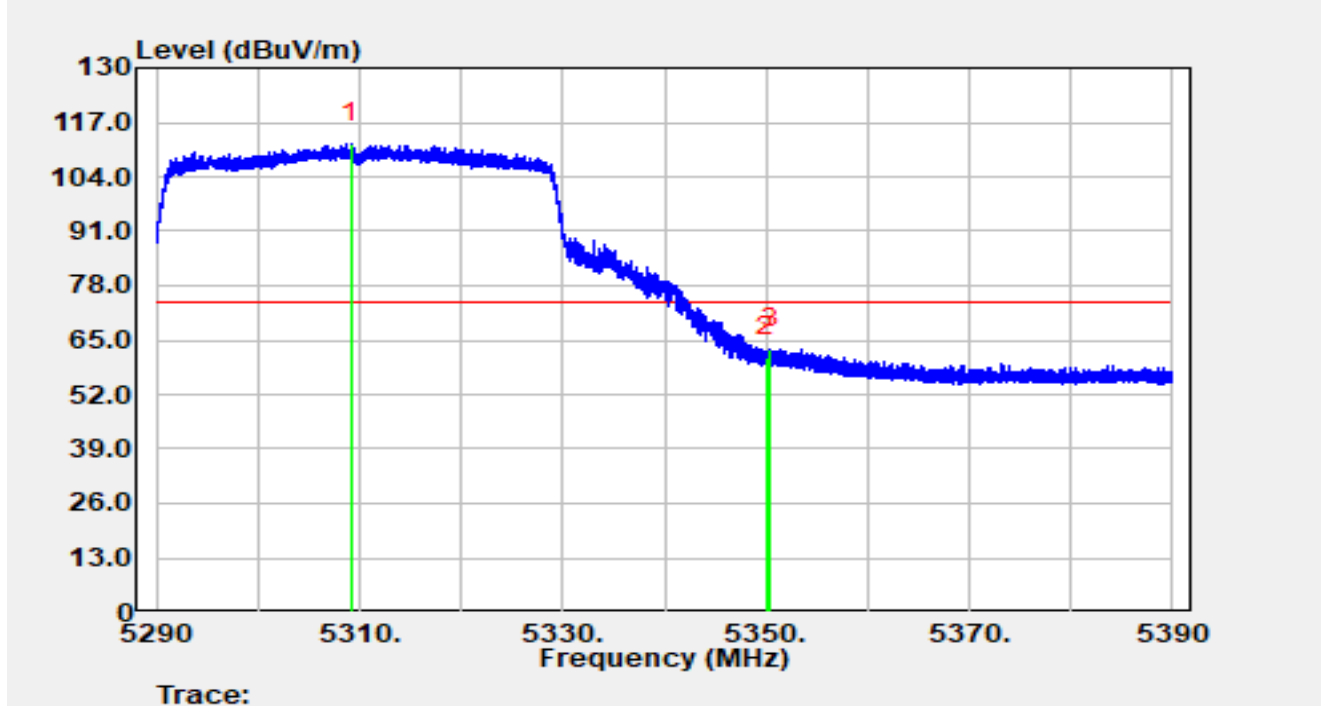


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5309.17	92.41	19.52	111.93	N/A	N/A	Peak
2		5350.00	41.13	19.85	60.99	-13.01	74.00	Peak
3	*	5350.39	43.14	19.85	62.99	-11.01	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

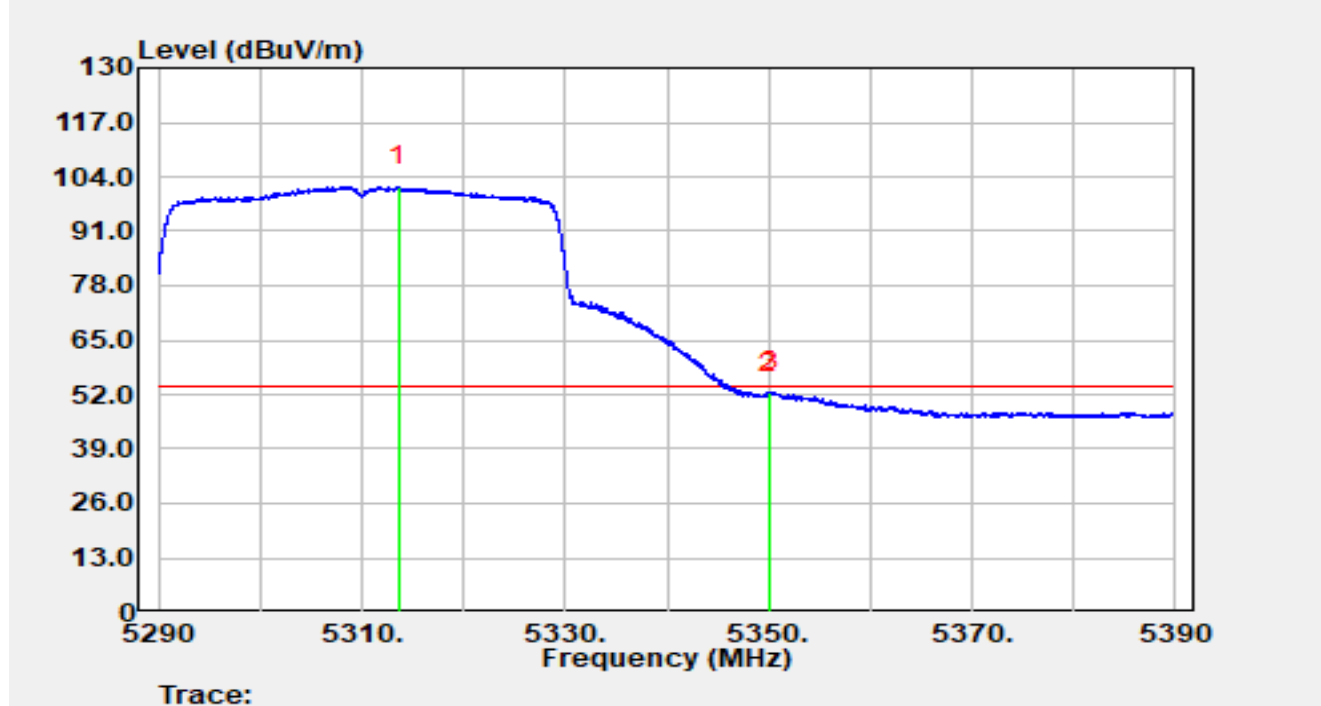


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.57	82.04	19.51	101.55	N/A	N/A	Average
2		5350.00	32.40	19.85	52.25	-1.75	54.00	Average
3	*	5350.09	32.85	19.85	52.70	-1.30	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

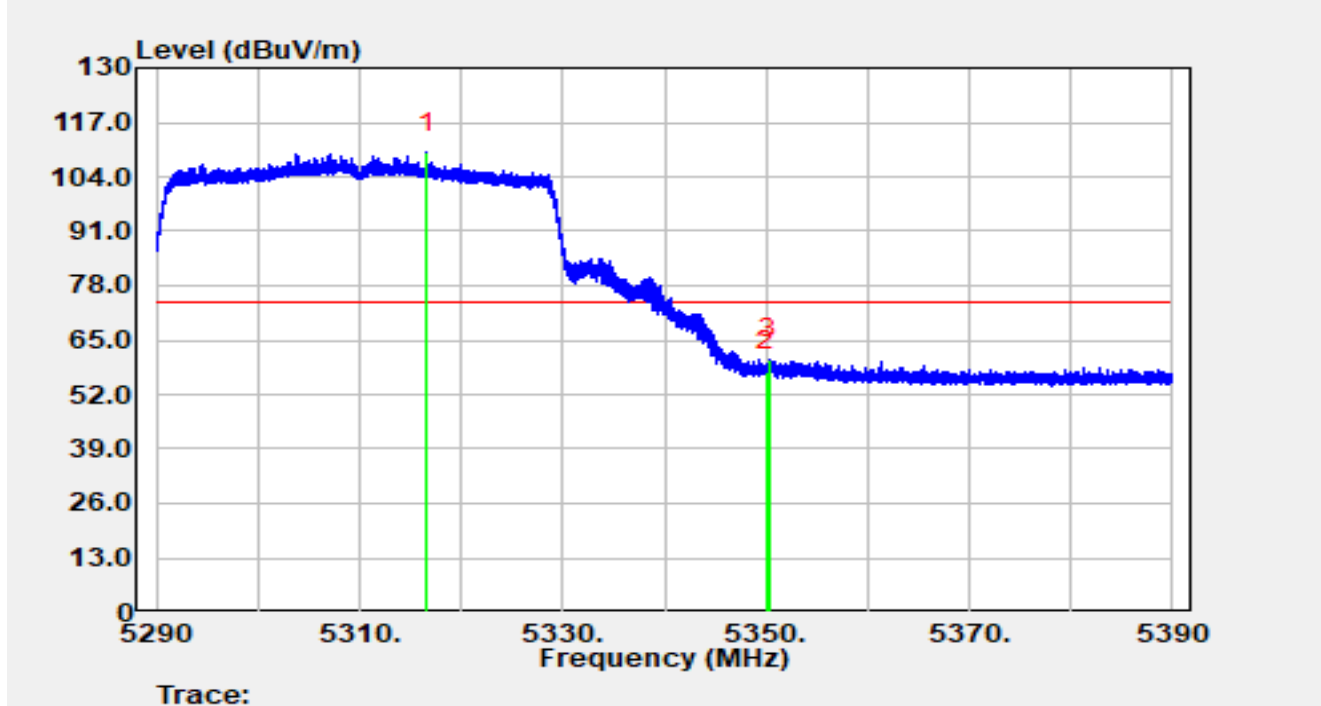


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.65	90.28	19.52	109.81	N/A	N/A	Peak
2		5350.00	37.68	19.85	57.53	-16.47	74.00	Peak
3	*	5350.34	40.63	19.85	60.49	-13.51	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

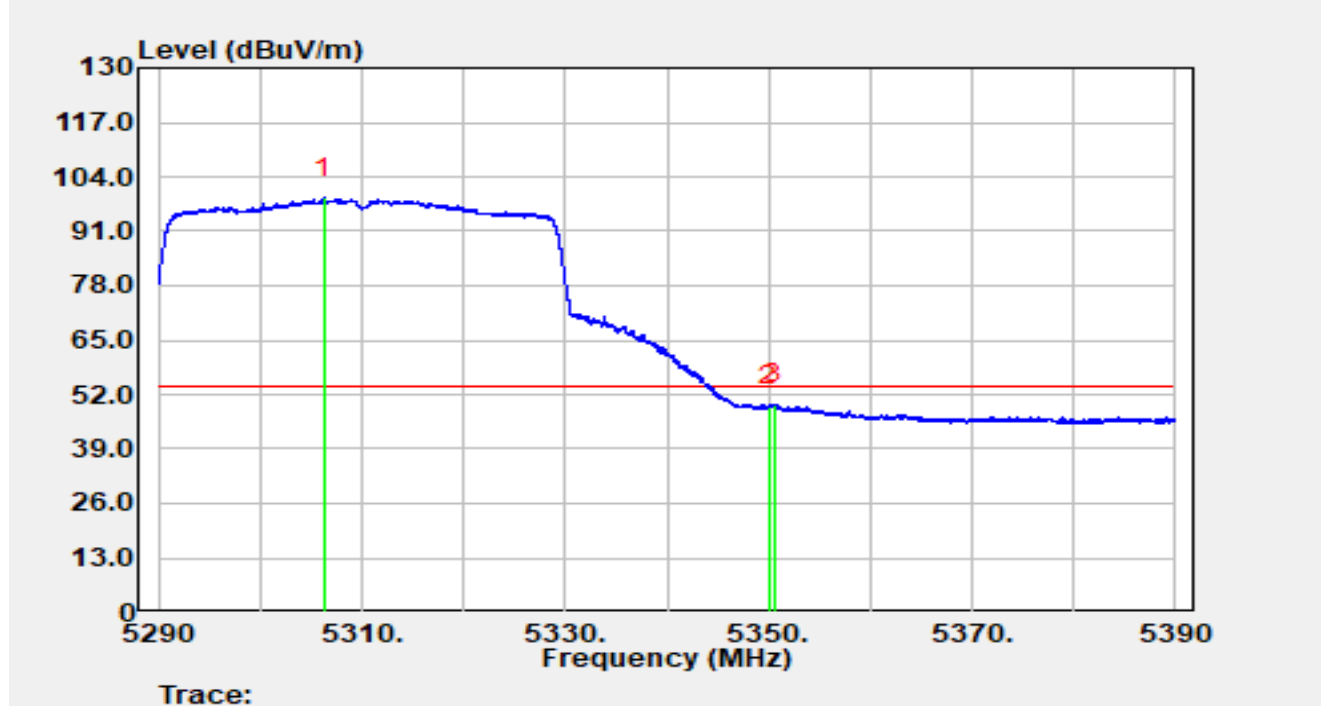


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.22	79.41	19.53	98.94	N/A	N/A	Average
2		5350.00	29.23	19.85	49.08	-4.92	54.00	Average
3	*	5350.54	29.85	19.86	49.70	-4.30	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

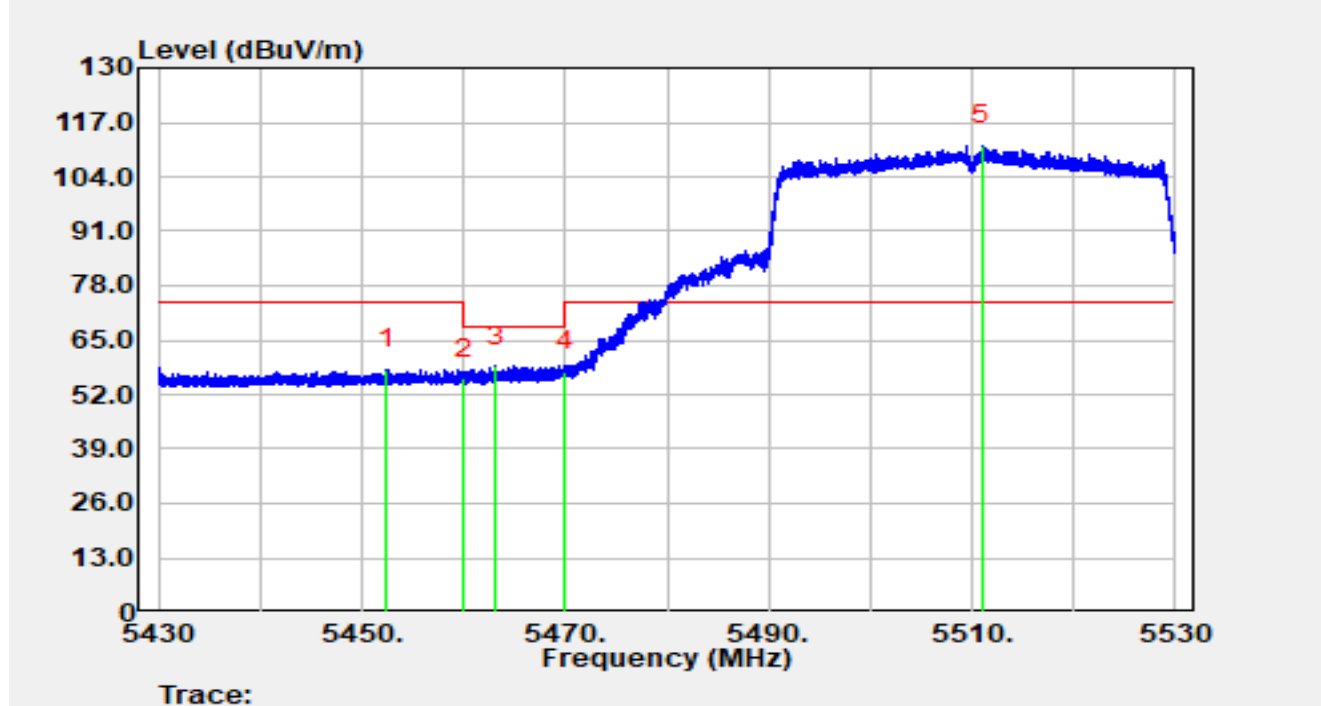


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.39	37.89	20.13	58.02	-15.98	74.00	Peak
2		5460.00	35.59	20.15	55.73	-12.47	68.20	Peak
3	*	5463.21	38.71	20.12	58.83	-9.37	68.20	Peak
4		5470.00	37.42	20.03	57.46	-10.74	68.20	Peak
5		5511.00	91.85	19.72	111.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

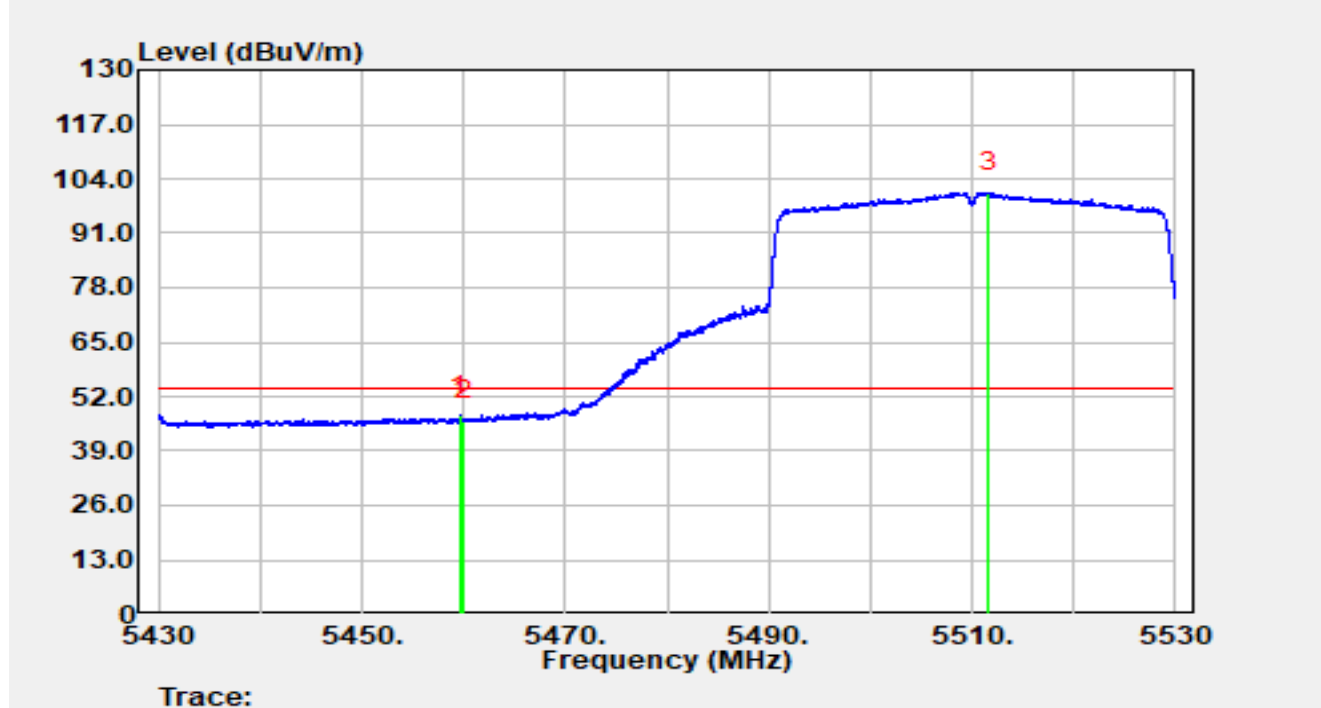


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.65	27.32	20.15	47.47	-6.53	54.00	Average
2		5460.00	26.07	20.15	46.22	-7.78	54.00	Average
3		5511.66	81.05	19.73	100.78	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

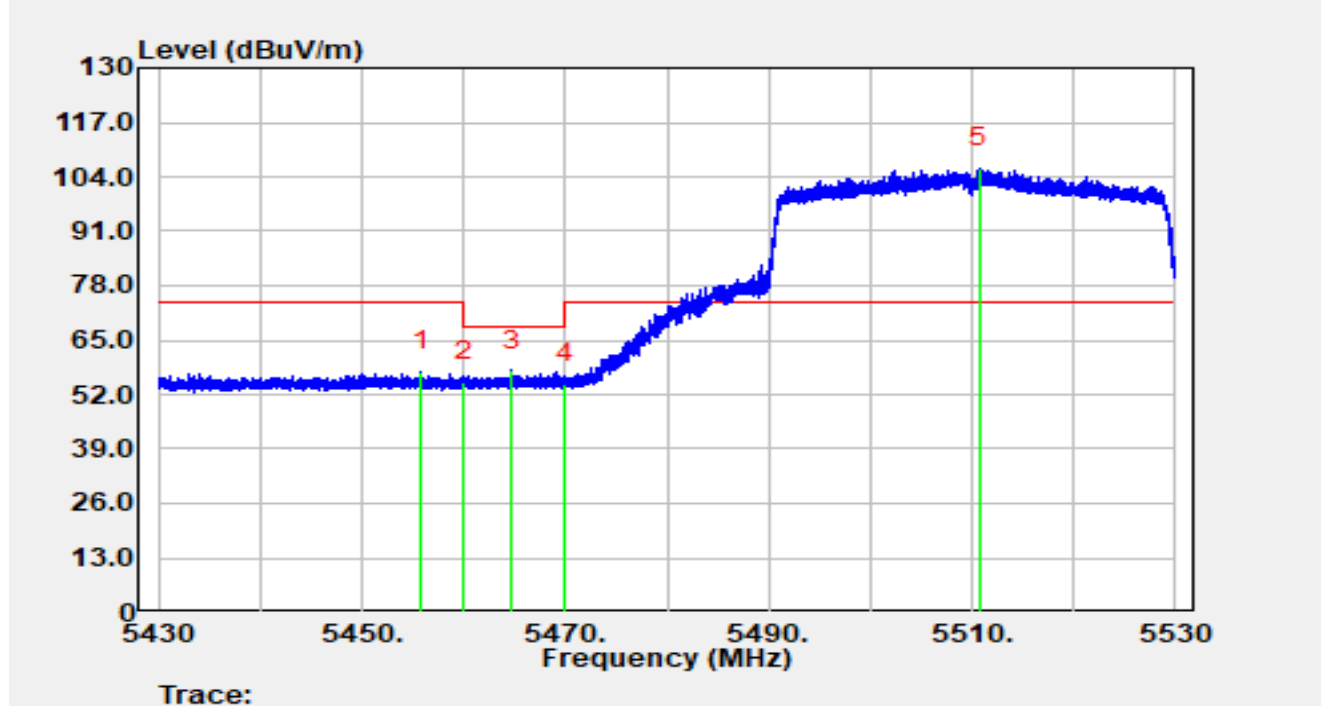


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.82	37.29	20.14	57.43	-16.57	74.00	Peak
2		5460.00	34.83	20.15	54.98	-13.22	68.20	Peak
3	*	5464.73	37.64	20.10	57.74	-10.46	68.20	Peak
4		5470.00	34.47	20.03	54.50	-13.70	68.20	Peak
5		5510.66	86.35	19.72	106.07	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

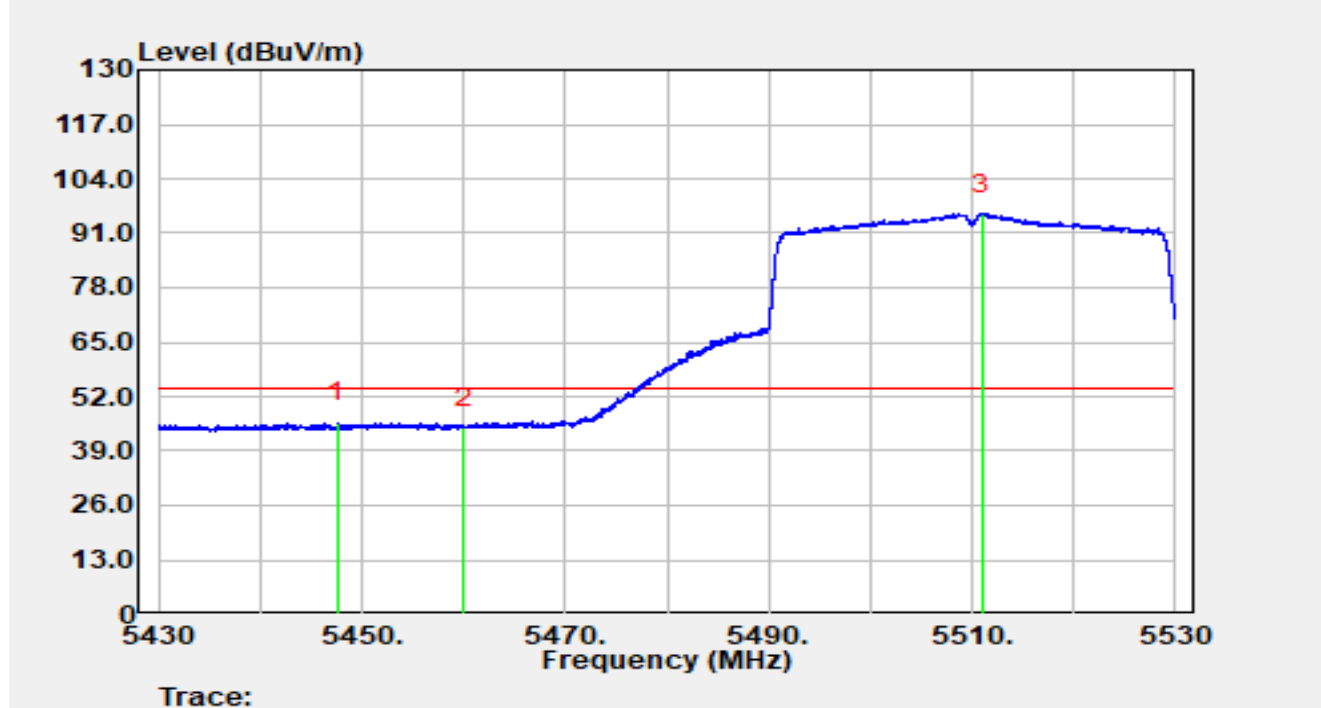


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.59	25.55	20.11	45.66	-8.34	54.00	Average
2		5460.00	24.50	20.15	44.64	-9.36	54.00	Average
3		5511.04	75.86	19.72	95.58	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5670MHz		

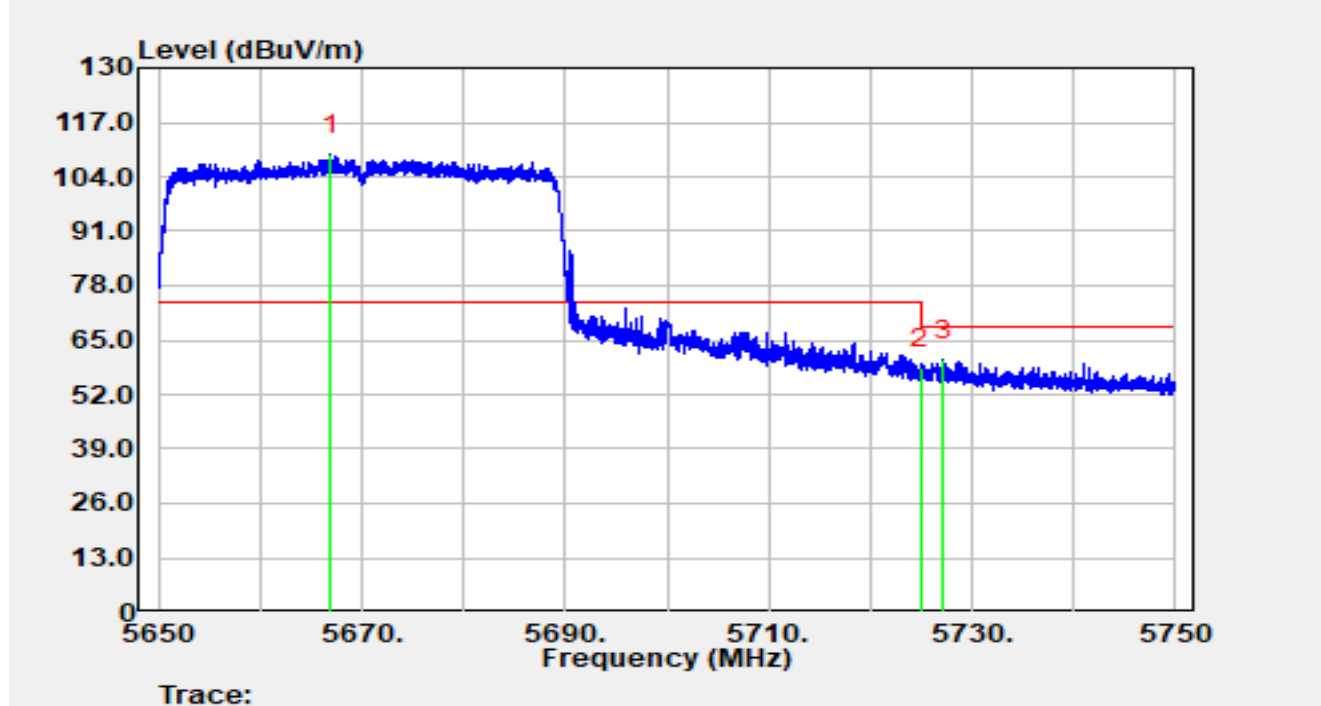


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.97	88.85	20.50	109.35	N/A	N/A	Peak
2		5725.00	36.98	21.34	58.32	-9.88	68.20	Peak
3	*	5727.16	38.77	21.33	60.10	-8.10	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5670MHz		

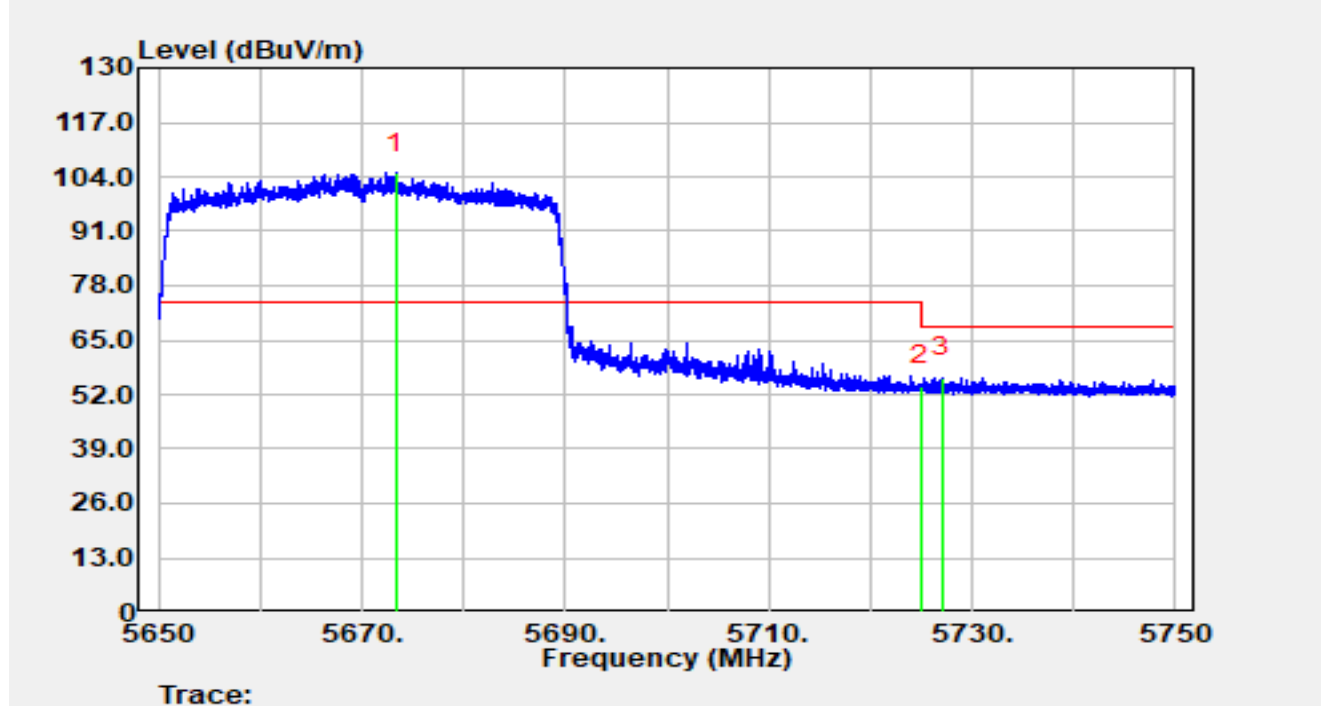


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5673.38	84.40	20.57	104.97	N/A	N/A	Peak
2		5725.00	32.67	21.34	54.01	-14.19	68.20	Peak
3	*	5727.00	34.66	21.33	55.99	-12.21	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5755MHz		

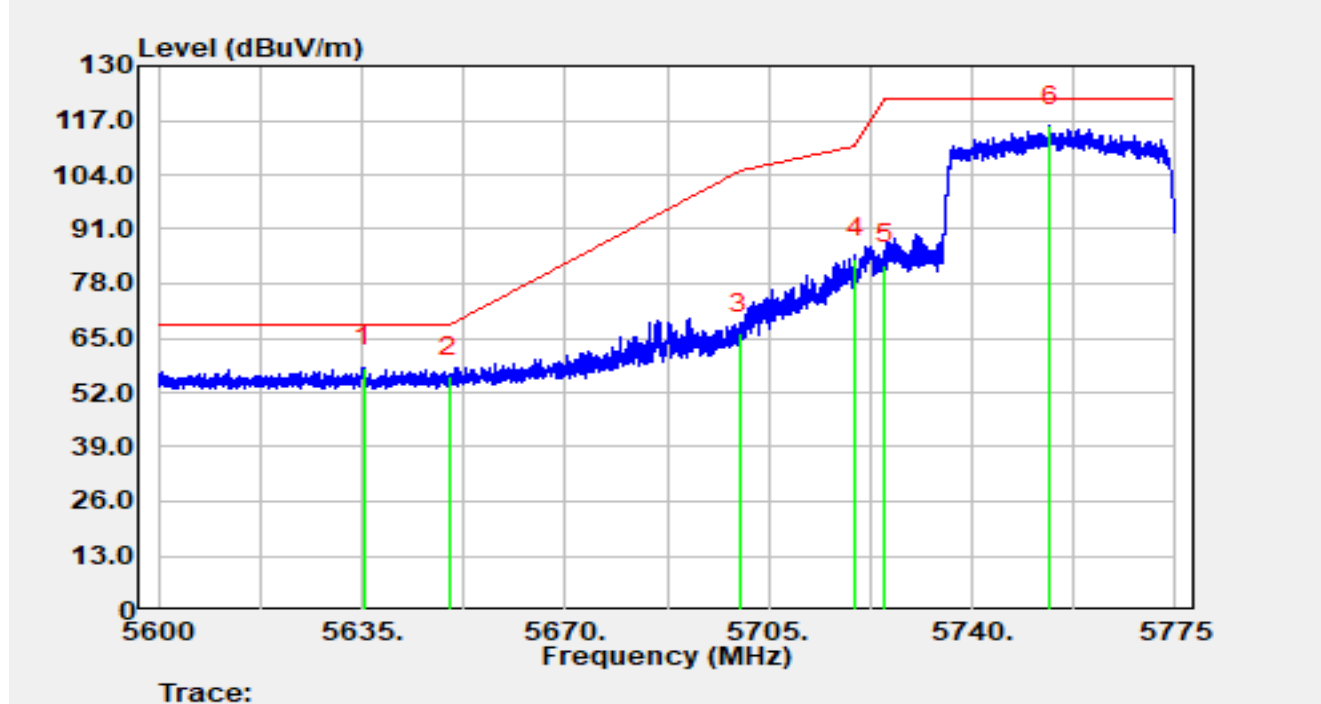


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5635.26	37.17	20.79	57.97	-10.23	68.20	Peak
2		5650.00	35.27	20.63	55.90	-12.30	68.20	Peak
3		5700.00	45.13	21.09	66.22	-38.98	105.20	Peak
4		5720.00	62.72	21.36	84.09	-26.71	110.80	Peak
5		5725.00	61.16	21.34	82.50	-39.70	122.20	Peak
6		5753.44	94.59	21.09	115.68	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5755MHz		

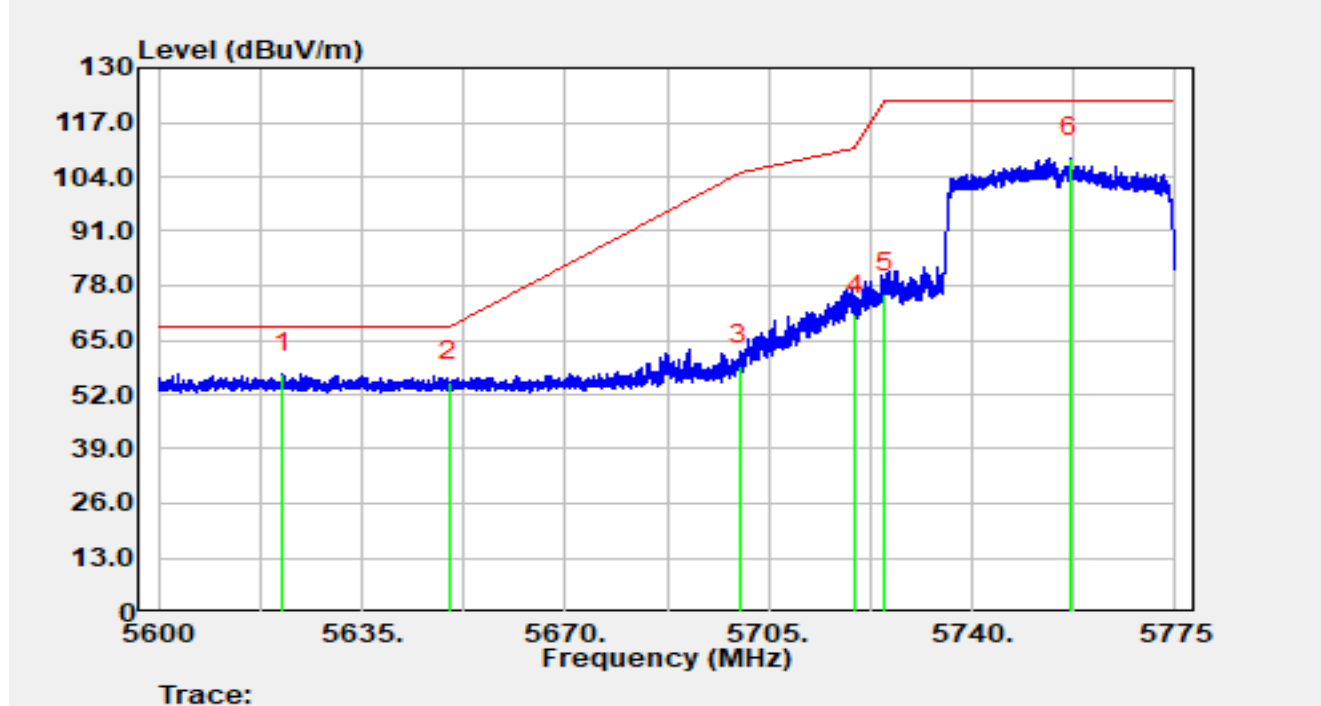


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.44	36.41	20.73	57.15	-11.05	68.20	Peak
2		5650.00	34.53	20.63	55.16	-13.04	68.20	Peak
3		5700.00	37.86	21.09	58.95	-46.25	105.20	Peak
4		5720.00	49.65	21.36	71.01	-39.79	110.80	Peak
5		5725.00	54.71	21.34	76.05	-46.15	122.20	Peak
6		5756.91	87.47	21.11	108.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5795MHz		

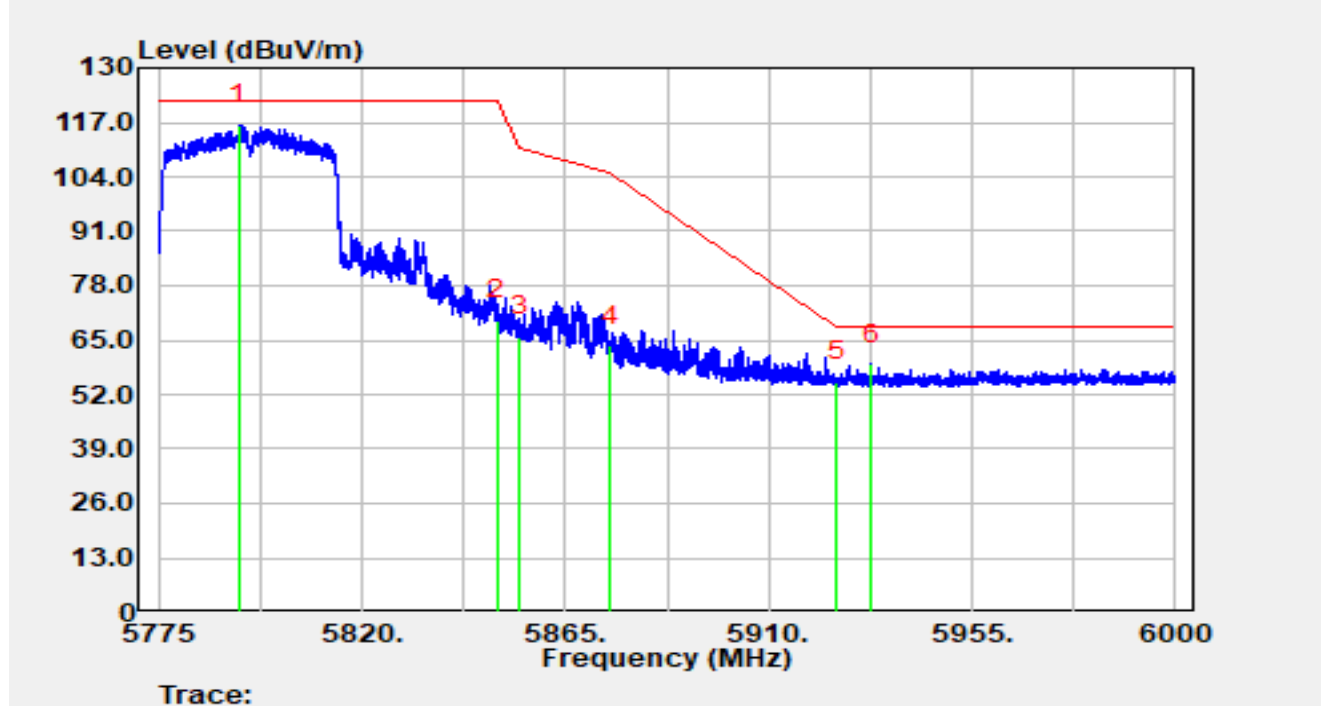


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5792.71	94.79	21.49	116.28	N/A	N/A	Peak
2		5850.00	48.47	21.33	69.81	-52.39	122.20	Peak
3		5855.00	44.55	21.33	65.87	-44.93	110.80	Peak
4		5875.00	41.98	21.59	63.57	-41.63	105.20	Peak
5		5925.00	33.51	21.49	55.01	-13.19	68.20	Peak
6	*	5932.77	37.76	21.47	59.23	-8.97	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5795MHz		

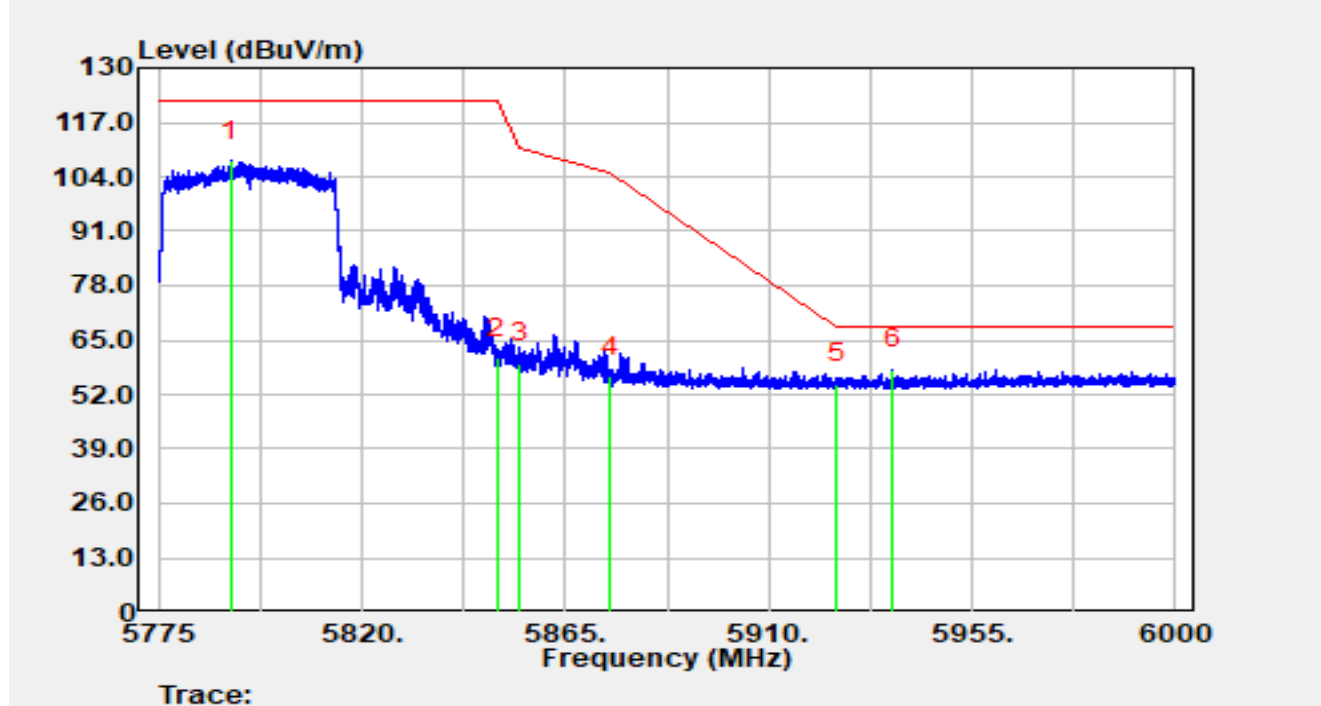


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.00	86.34	21.47	107.81	N/A	N/A	Peak
2		5849.99	39.36	21.33	60.69	-61.51	122.20	Peak
3		5855.00	38.23	21.33	59.56	-51.24	110.80	Peak
4		5875.00	34.68	21.59	56.28	-48.92	105.20	Peak
5		5925.00	33.14	21.49	54.63	-13.57	68.20	Peak
6	*	5937.34	36.66	21.46	58.12	-10.08	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

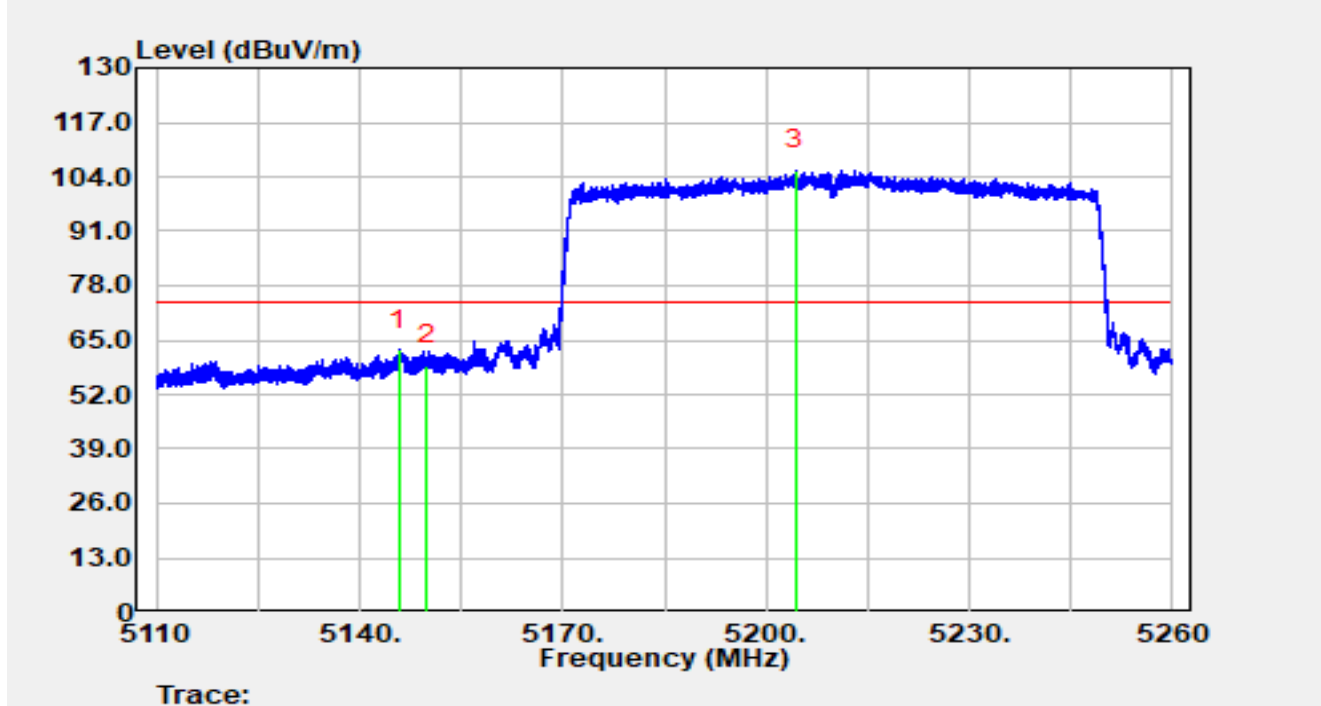


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.85	43.18	19.44	62.61	-11.39	74.00	Peak
2		5150.00	39.53	19.43	58.96	-15.04	74.00	Peak
3		5204.26	85.98	19.64	105.62	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

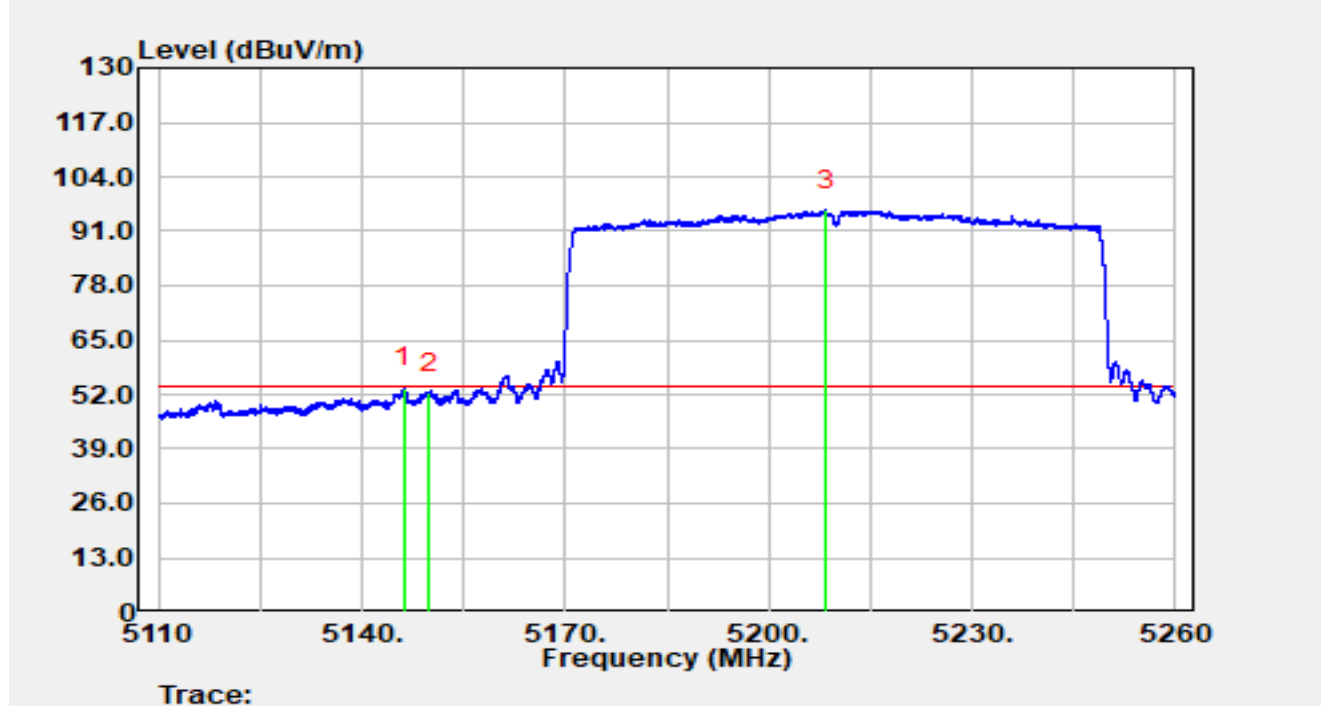


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.27	34.13	19.44	53.57	-0.43	54.00	Average
2		5150.00	32.84	19.43	52.27	-1.73	54.00	Average
3		5208.43	76.44	19.55	95.98	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

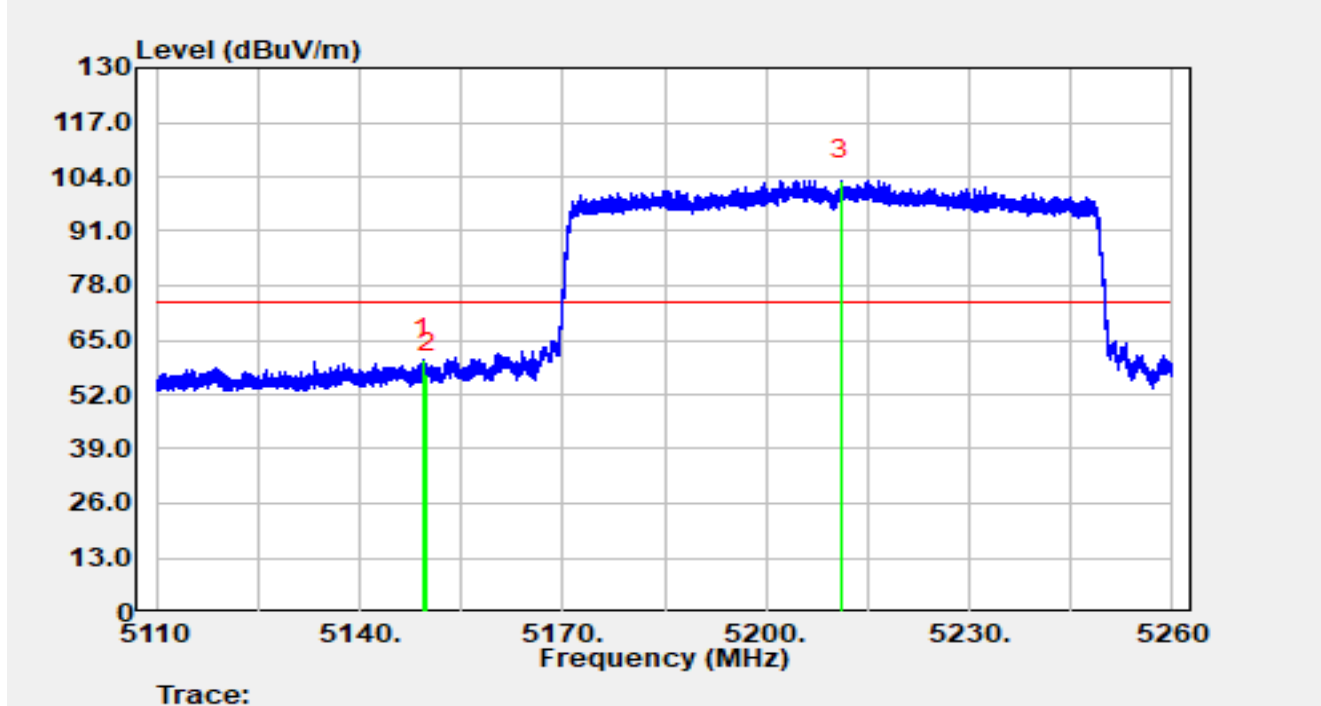


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.27	41.04	19.43	60.48	-13.52	74.00	Peak
2		5150.00	37.55	19.43	56.98	-17.02	74.00	Peak
3		5211.03	83.71	19.49	103.20	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

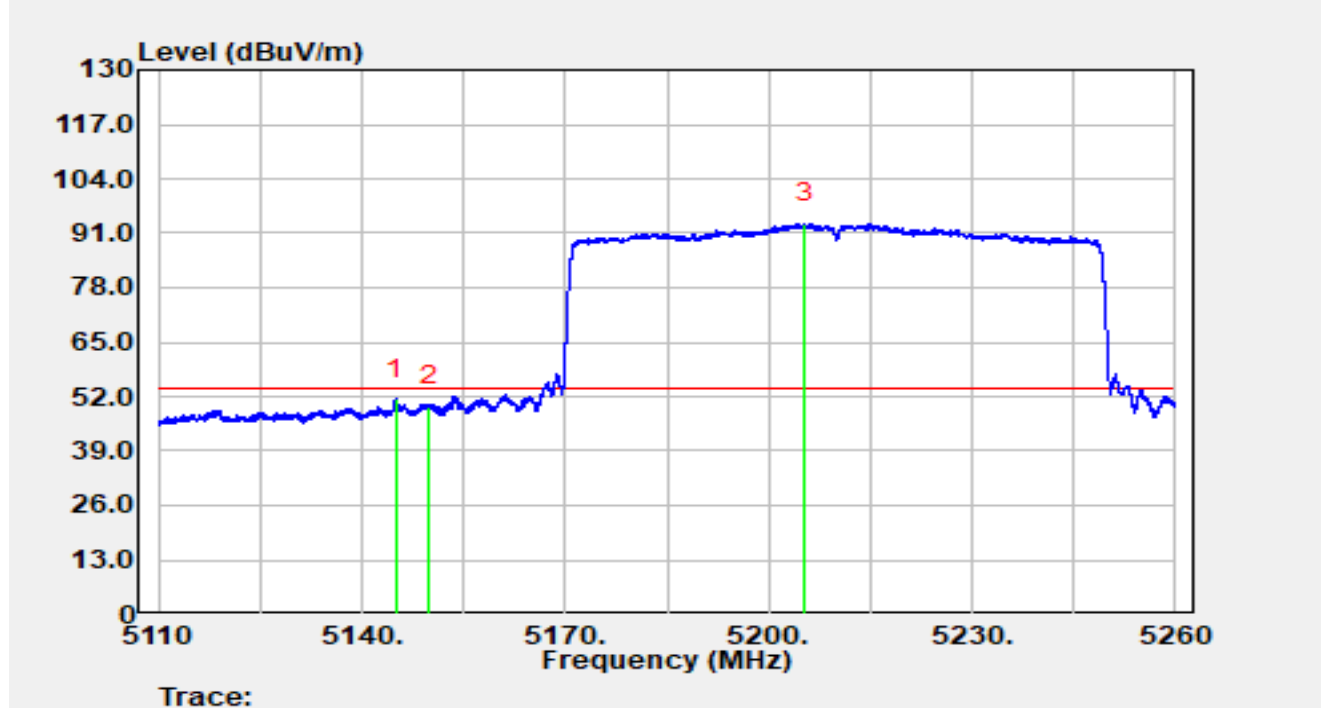


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.03	31.86	19.44	51.30	-2.70	54.00	Average
2		5150.00	30.27	19.43	49.70	-4.30	54.00	Average
3		5205.36	73.81	19.62	93.43	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

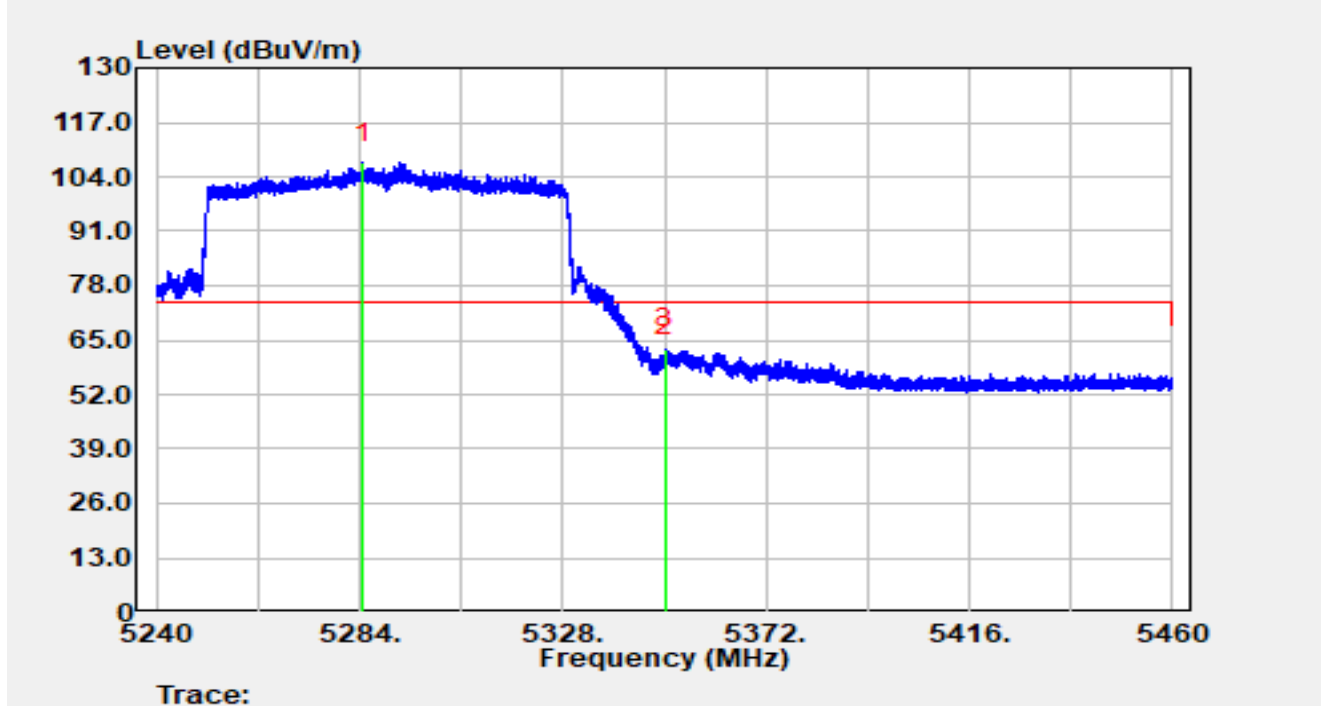


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5284.59	87.65	19.73	107.38	N/A	N/A	Peak
2		5350.00	41.12	19.85	60.97	-13.03	74.00	Peak
3	*	5350.24	43.08	19.85	62.93	-11.07	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

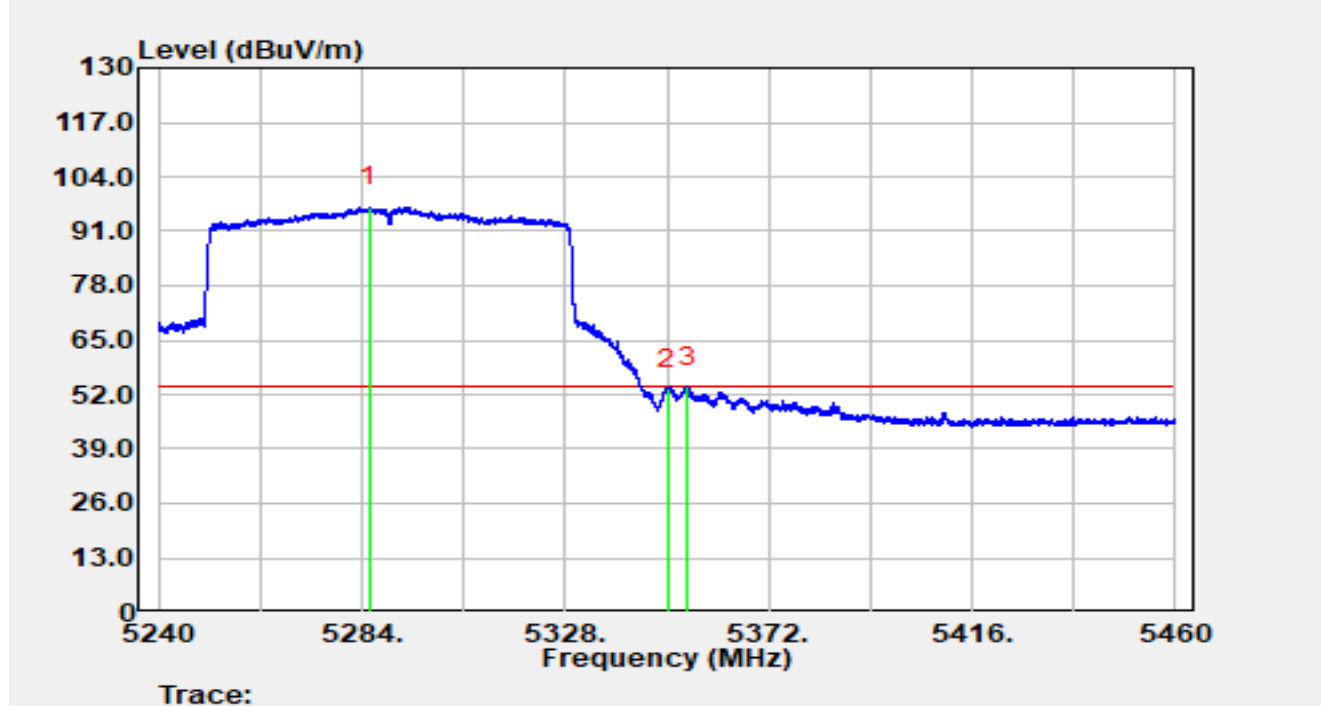


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5285.72	77.05	19.74	96.79	N/A	N/A	Average
2		5350.00	33.54	19.85	53.39	-0.61	54.00	Average
3	*	5354.44	33.85	19.89	53.74	-0.26	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

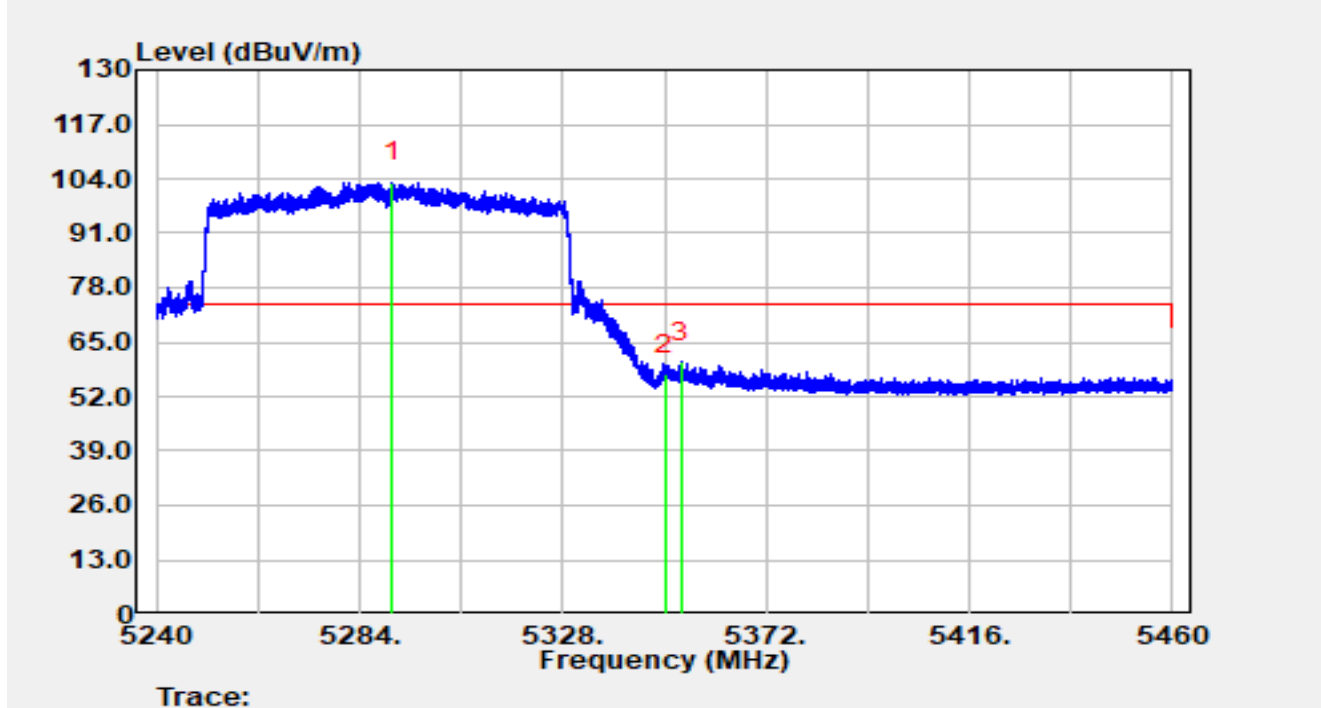


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5291.17	83.42	19.72	103.14	N/A	N/A	Peak
2		5350.00	37.38	19.85	57.23	-16.77	74.00	Peak
3	*	5353.65	40.41	19.88	60.30	-13.70	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

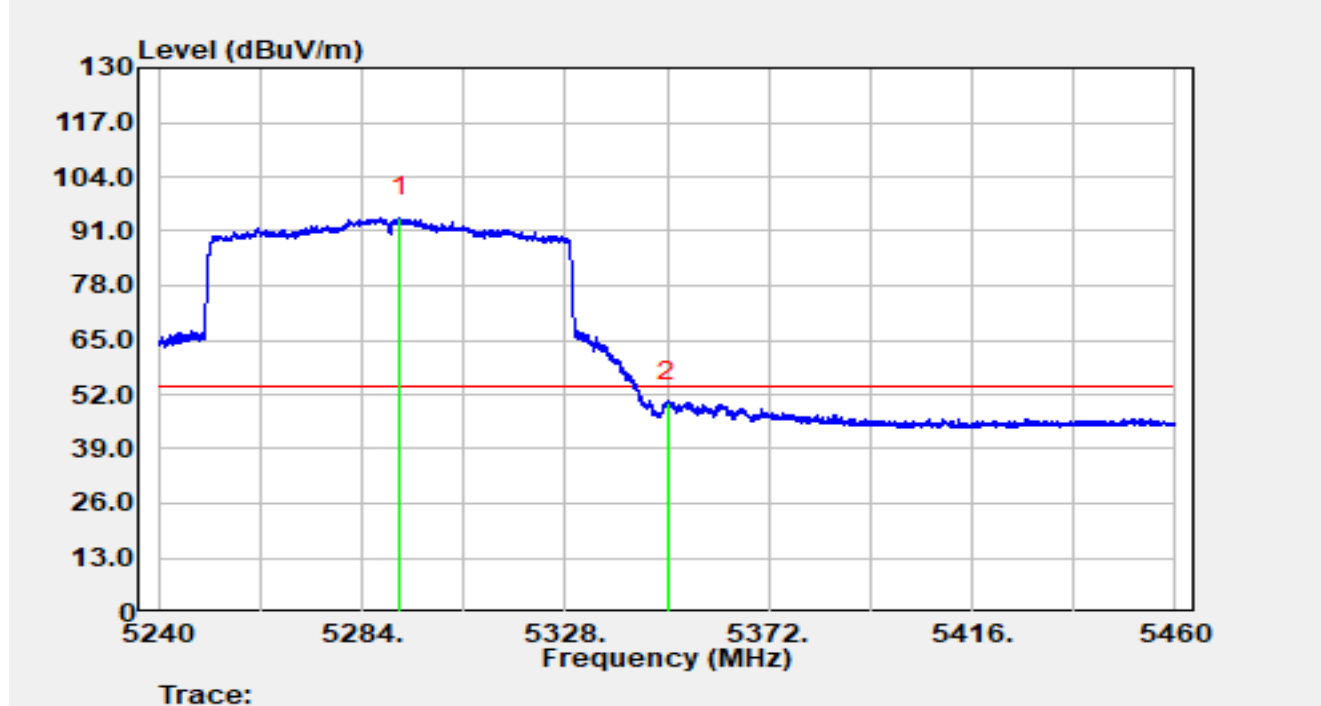


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5292.14	74.52	19.71	94.23	N/A	N/A	Average
2	*	5350.00	30.19	19.85	50.04	-3.96	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

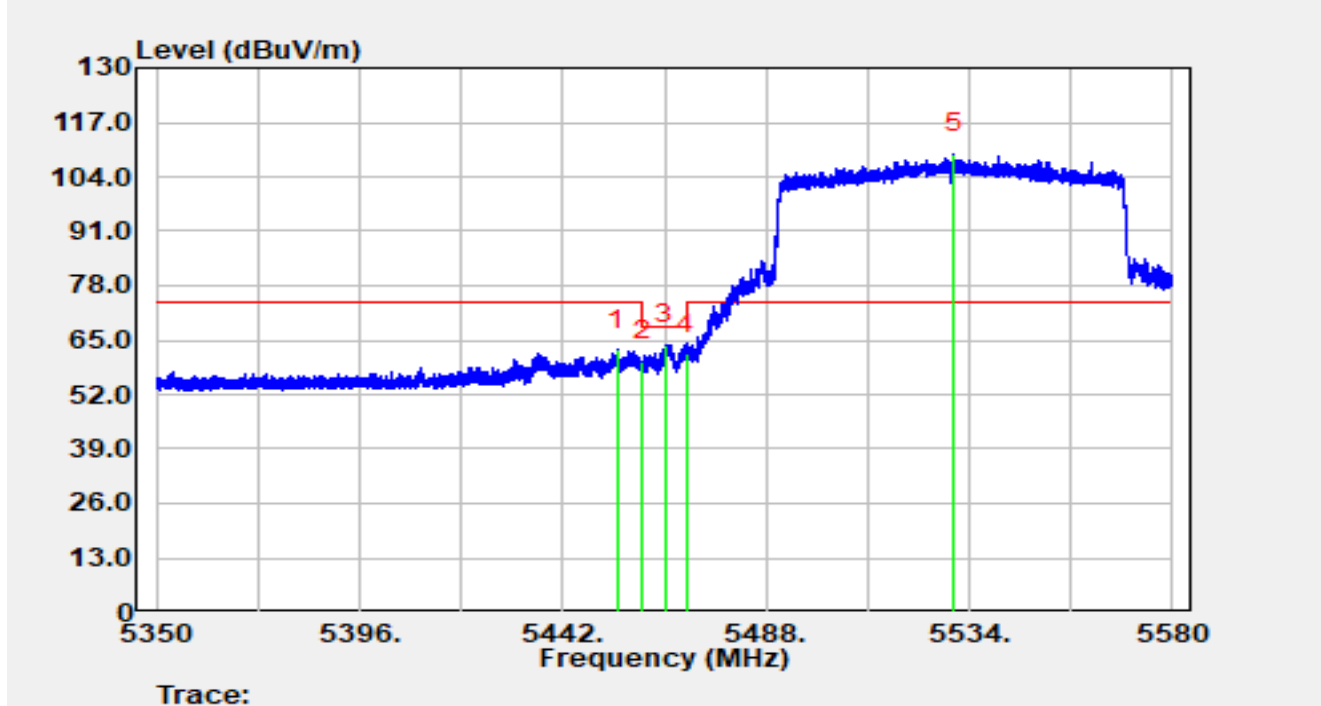


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.37	42.61	20.13	62.74	-11.26	74.00	Peak
2		5460.00	39.81	20.15	59.96	-8.24	68.20	Peak
3	*	5465.30	43.77	20.09	63.87	-4.33	68.20	Peak
4		5470.00	41.67	20.03	61.70	-6.50	68.20	Peak
5		5530.44	89.34	20.14	109.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

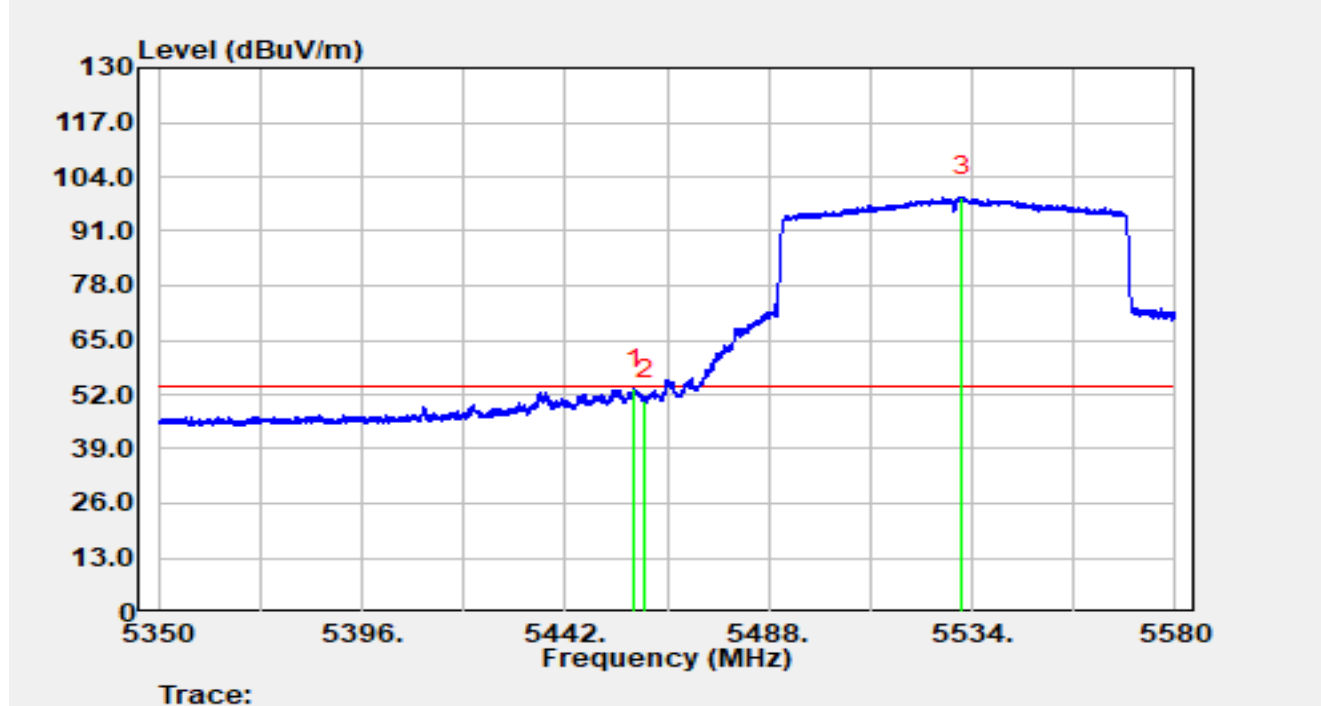


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.48	33.18	20.14	53.32	-0.68	54.00	Average
2		5460.00	30.44	20.15	50.59	-3.41	54.00	Average
3		5531.72	79.16	20.15	99.31	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

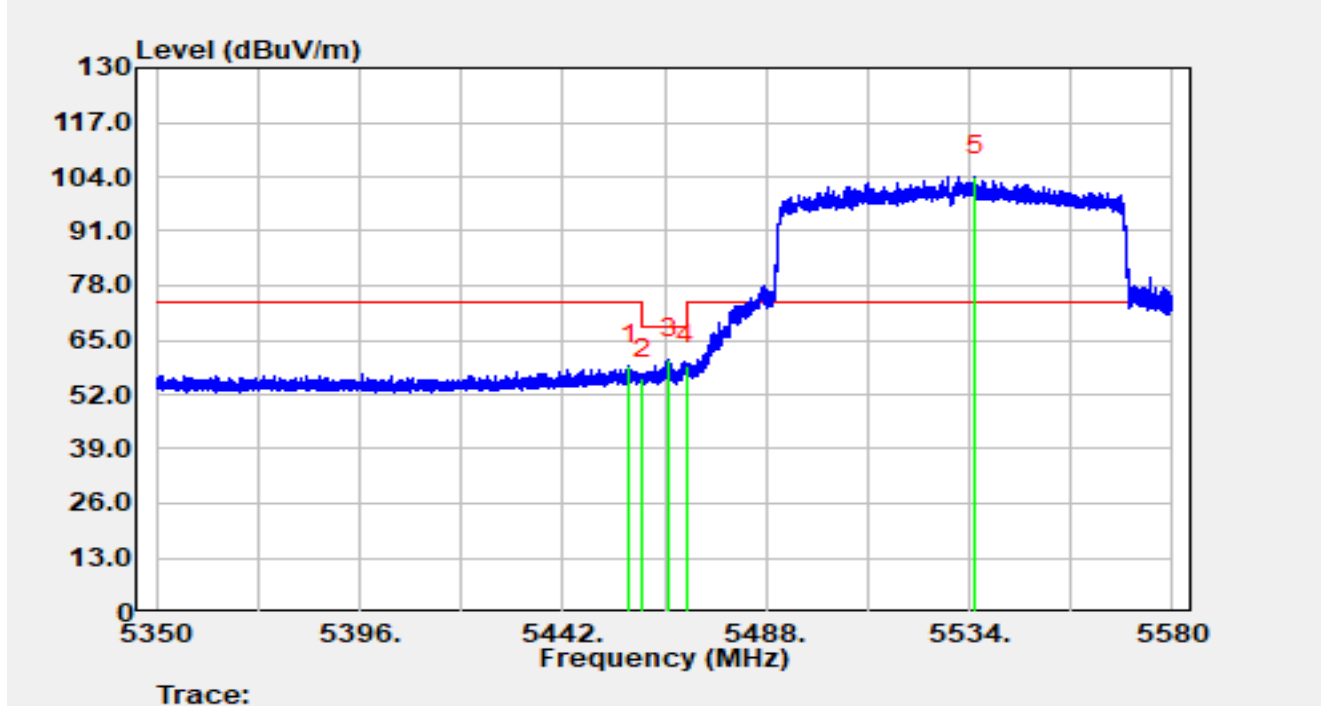


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.93	38.75	20.14	58.90	-15.10	74.00	Peak
2		5460.00	35.62	20.15	55.76	-12.44	68.20	Peak
3	*	5466.08	40.44	20.08	60.53	-7.67	68.20	Peak
4		5470.00	38.96	20.03	59.00	-9.20	68.20	Peak
5		5535.36	84.03	20.19	104.23	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHzP=20		

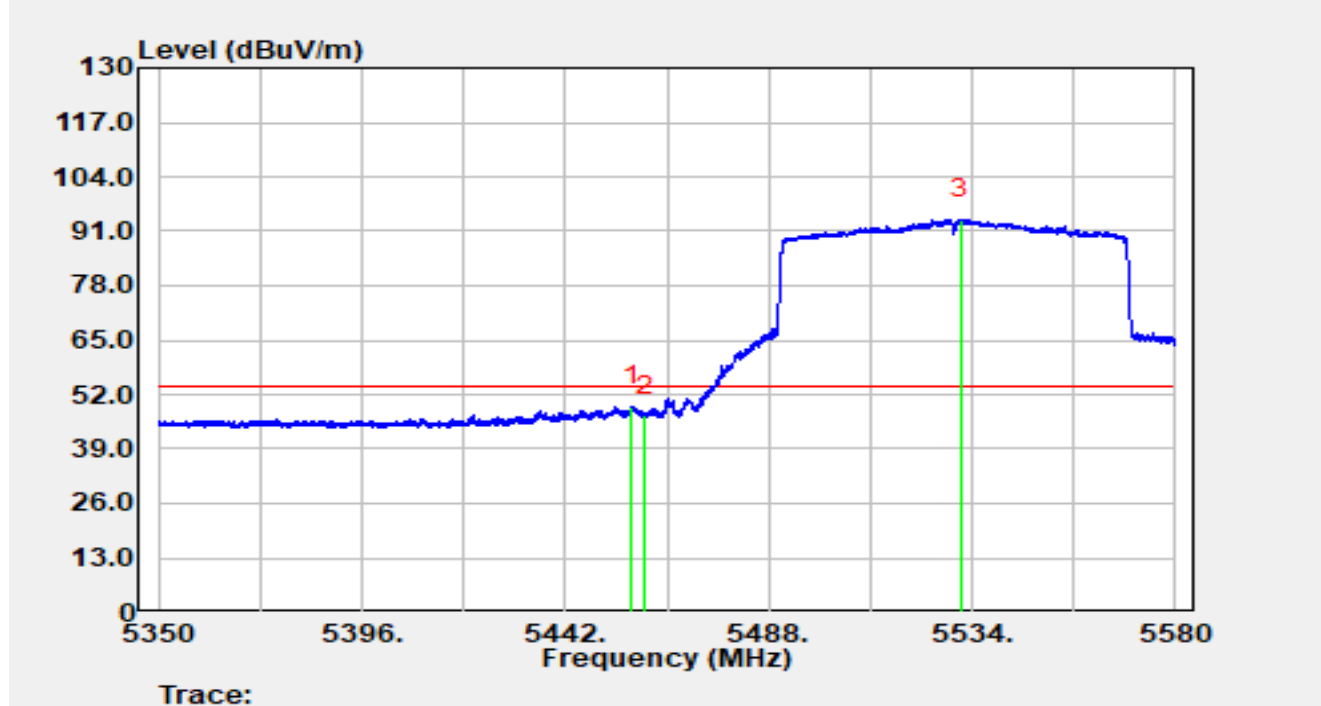


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.16	29.09	20.14	49.23	-4.77	54.00	Average
2		5460.00	26.89	20.15	47.03	-6.97	54.00	Average
3		5531.29	73.75	20.15	93.90	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5610MHz		

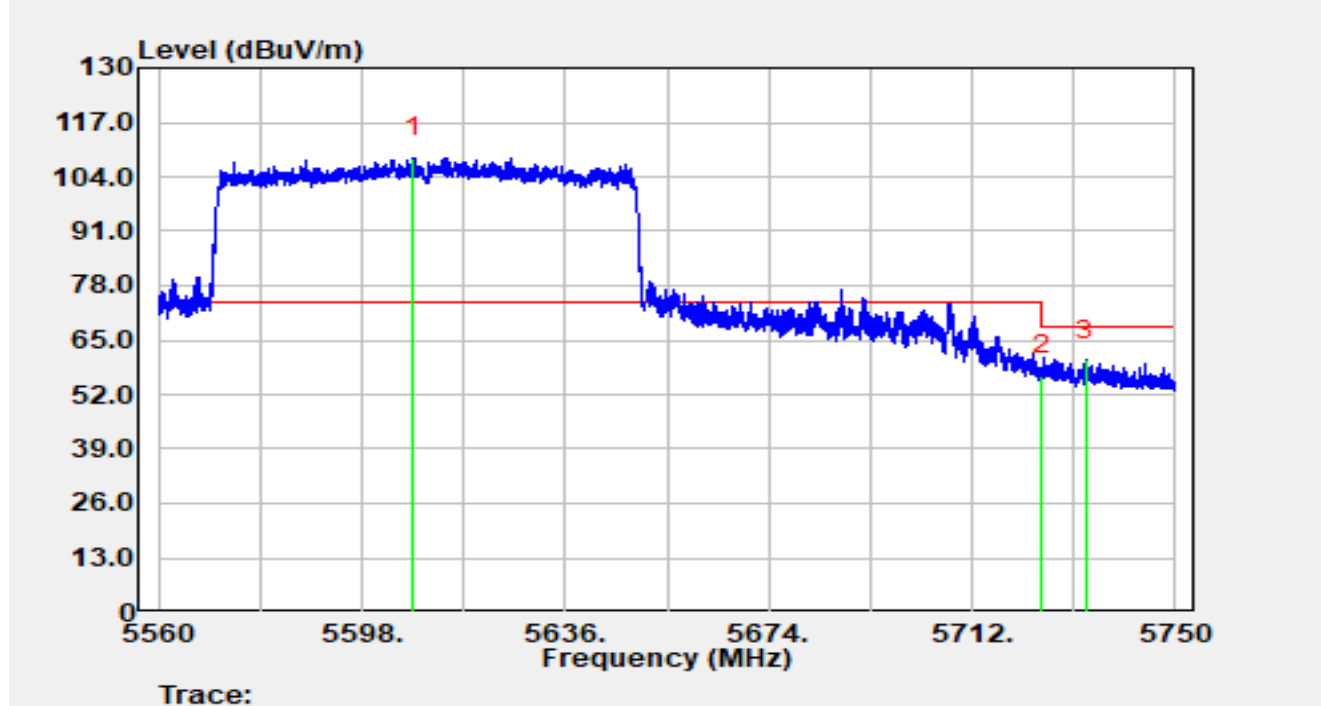


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5607.52	88.10	20.50	108.60	N/A	N/A	Peak
2		5725.00	35.22	21.34	56.56	-11.64	68.20	Peak
3	*	5733.19	38.99	21.30	60.29	-7.91	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5610MHz		

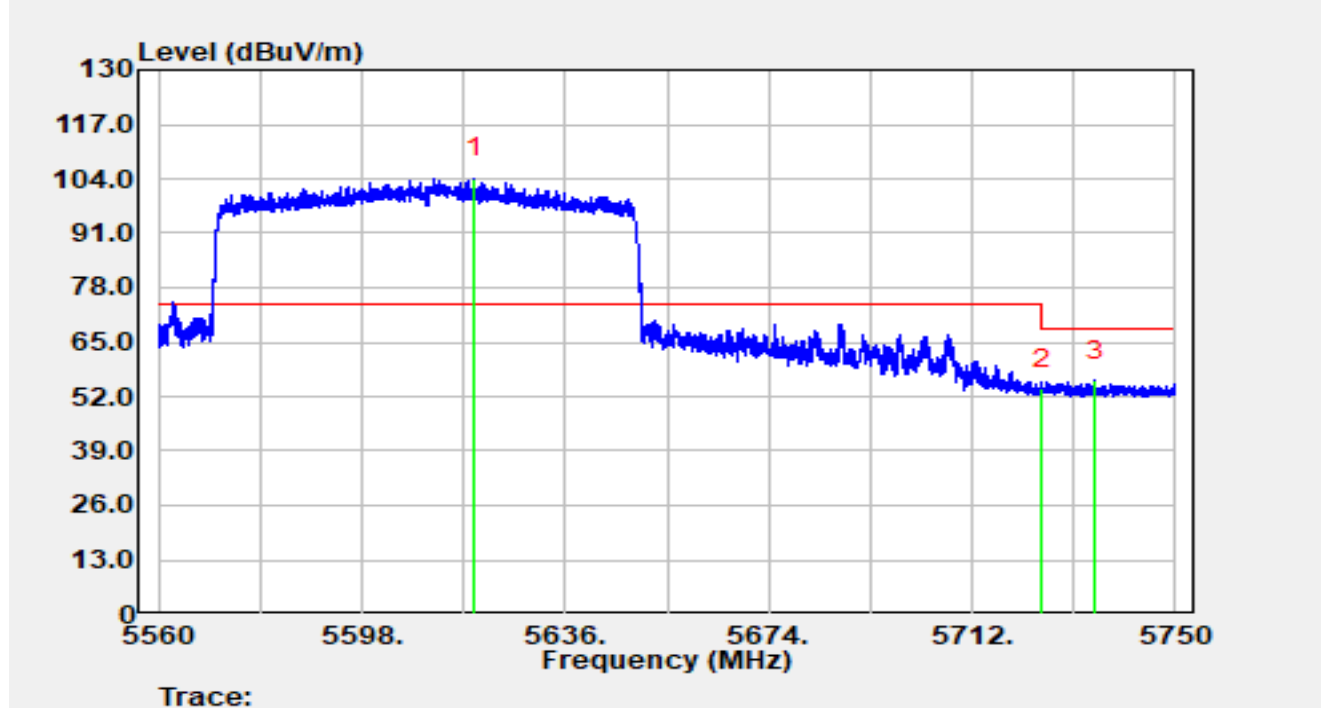


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5619.07	83.48	20.72	104.20	N/A	N/A	Peak
2		5725.00	32.38	21.34	53.72	-14.48	68.20	Peak
3	*	5735.07	34.53	21.29	55.82	-12.38	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5775MHz		

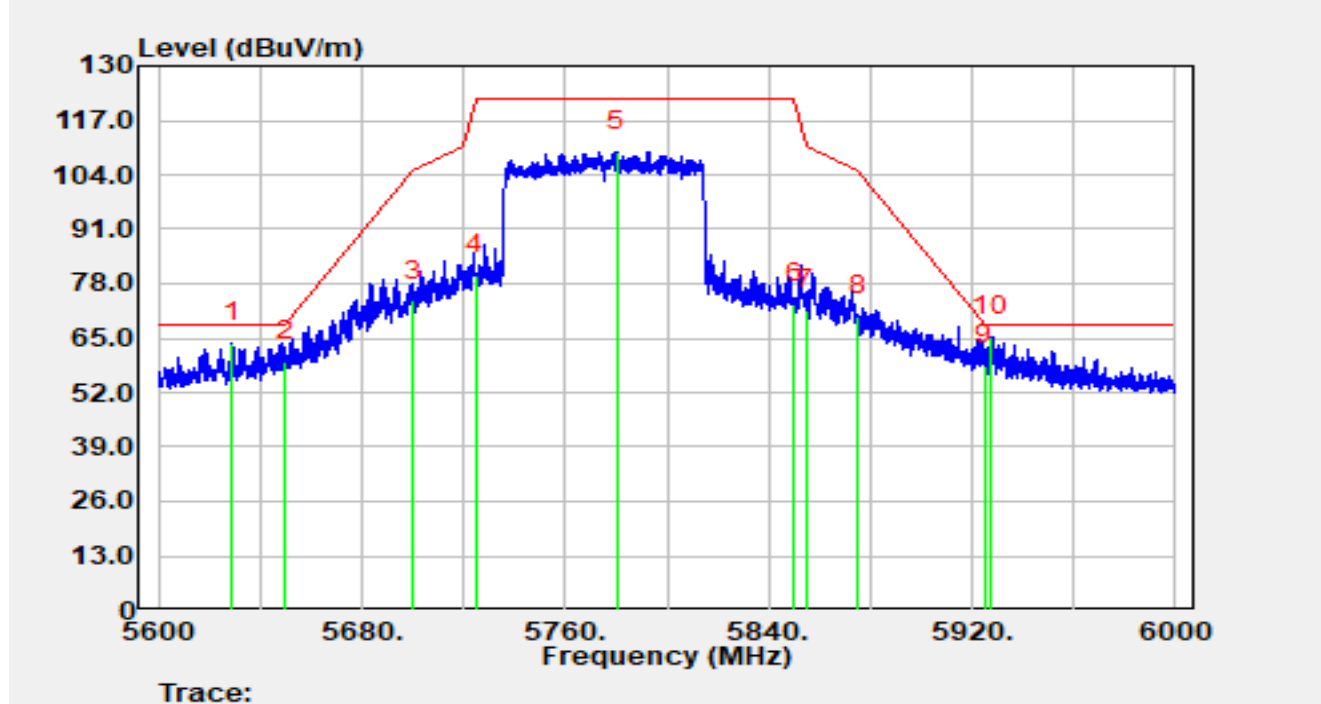


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5629.12	43.14	20.79	63.93	-4.27	68.20	Peak
2		5650.00	38.95	20.63	59.58	-8.62	68.20	Peak
3		5700.00	52.91	21.09	73.99	-31.21	105.20	Peak
4		5725.00	58.79	21.34	80.13	-42.07	122.20	Peak
5		5780.16	88.27	21.29	109.56	N/A	N/A	Peak
6		5850.00	51.96	21.33	73.30	-48.90	122.20	Peak
7		5855.00	50.47	21.33	71.80	-39.00	110.80	Peak
8		5875.00	48.60	21.59	70.19	-35.01	105.20	Peak
9		5925.00	37.05	21.49	58.54	-9.66	68.20	Peak
10	*	5927.80	43.96	21.48	65.44	-2.76	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-03
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5775MHz		

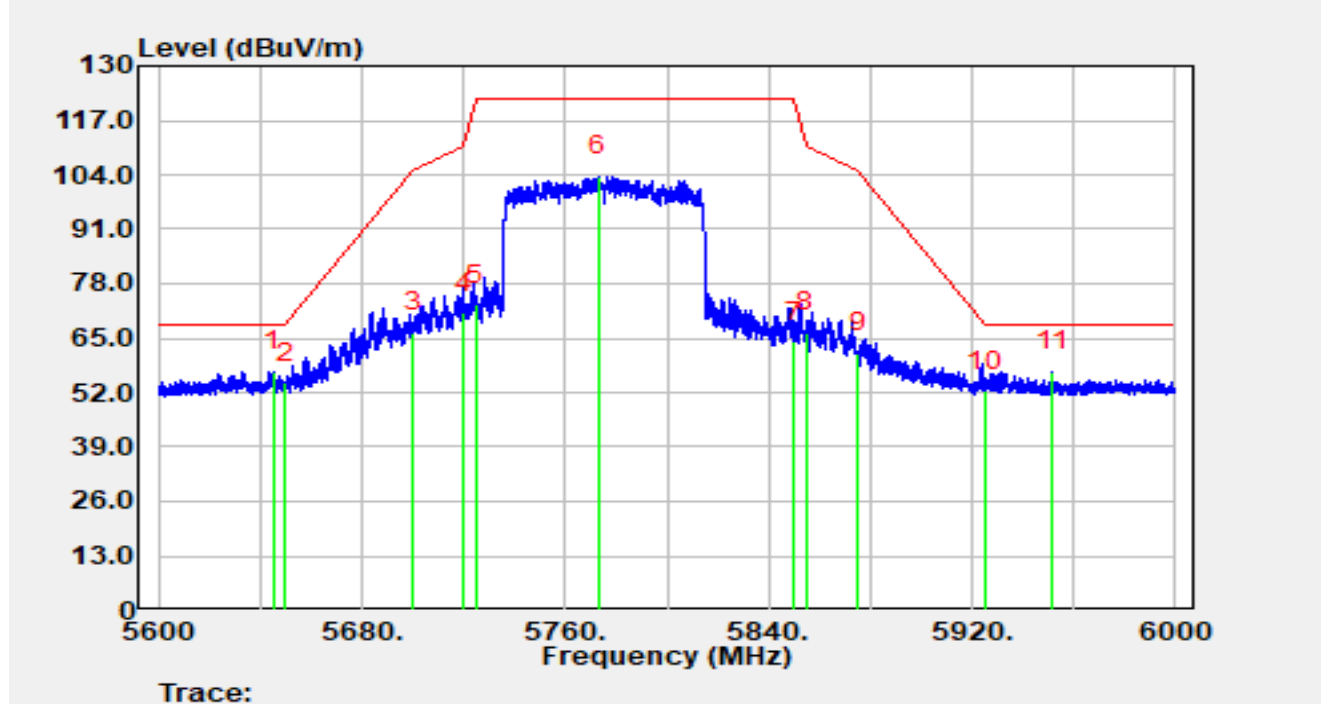

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.24	36.31	20.68	57.00	-11.20	68.20	Peak
2		5650.00	33.71	20.63	54.34	-13.86	68.20	Peak
3		5700.00	45.31	21.09	66.40	-38.80	105.20	Peak
4		5720.00	49.53	21.36	70.89	-39.91	110.80	Peak
5		5725.00	51.51	21.34	72.86	-49.34	122.20	Peak
6		5773.20	82.42	21.19	103.61	N/A	N/A	Peak
7		5850.00	42.88	21.33	64.22	-57.98	122.20	Peak
8		5855.00	45.13	21.33	66.45	-44.35	110.80	Peak
9		5875.00	39.80	21.59	61.39	-43.81	105.20	Peak
10		5925.00	30.85	21.49	52.34	-15.86	68.20	Peak
11		5951.56	35.37	21.58	56.96	-11.24	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

4.The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

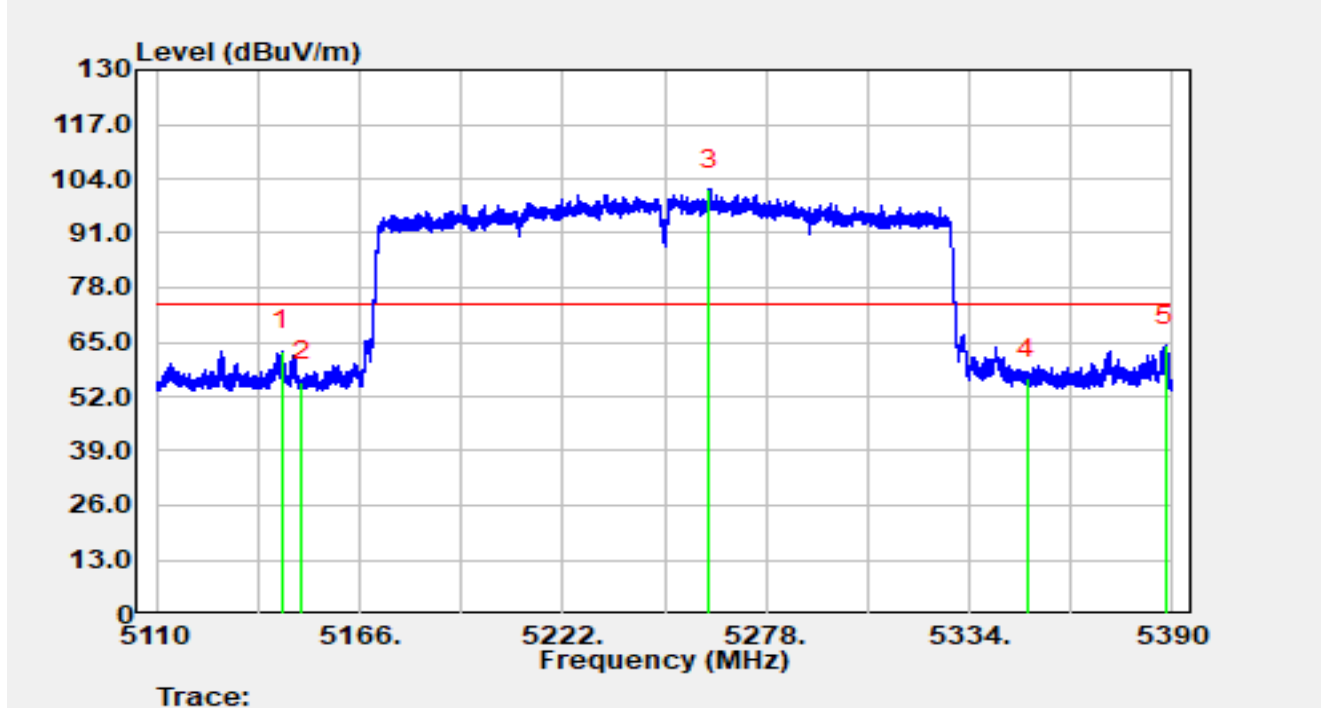


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5144.50	43.52	19.44	62.96	-11.04	74.00	Peak
2		5150.00	36.20	19.43	55.63	-18.37	74.00	Peak
3		5262.46	81.99	19.53	101.51	N/A	N/A	Peak
4		5350.00	36.40	19.85	56.25	-17.75	74.00	Peak
5	*	5387.98	44.31	19.91	64.22	-9.78	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

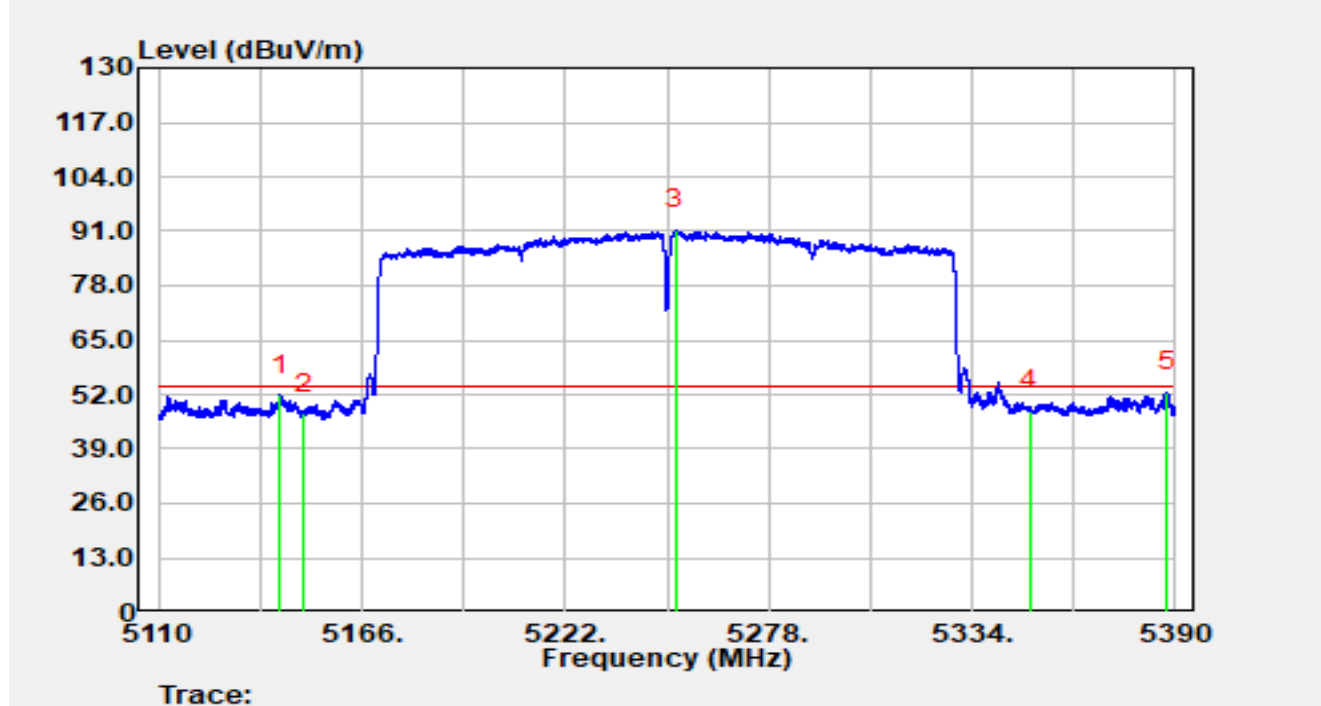


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5143.57	32.43	19.44	51.87	-2.13	54.00	Average
2		5150.00	28.06	19.43	47.49	-6.51	54.00	Average
3		5252.52	72.07	19.36	91.43	N/A	N/A	Average
4		5350.00	28.40	19.85	48.26	-5.74	54.00	Average
5	*	5387.62	32.63	19.91	52.54	-1.46	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

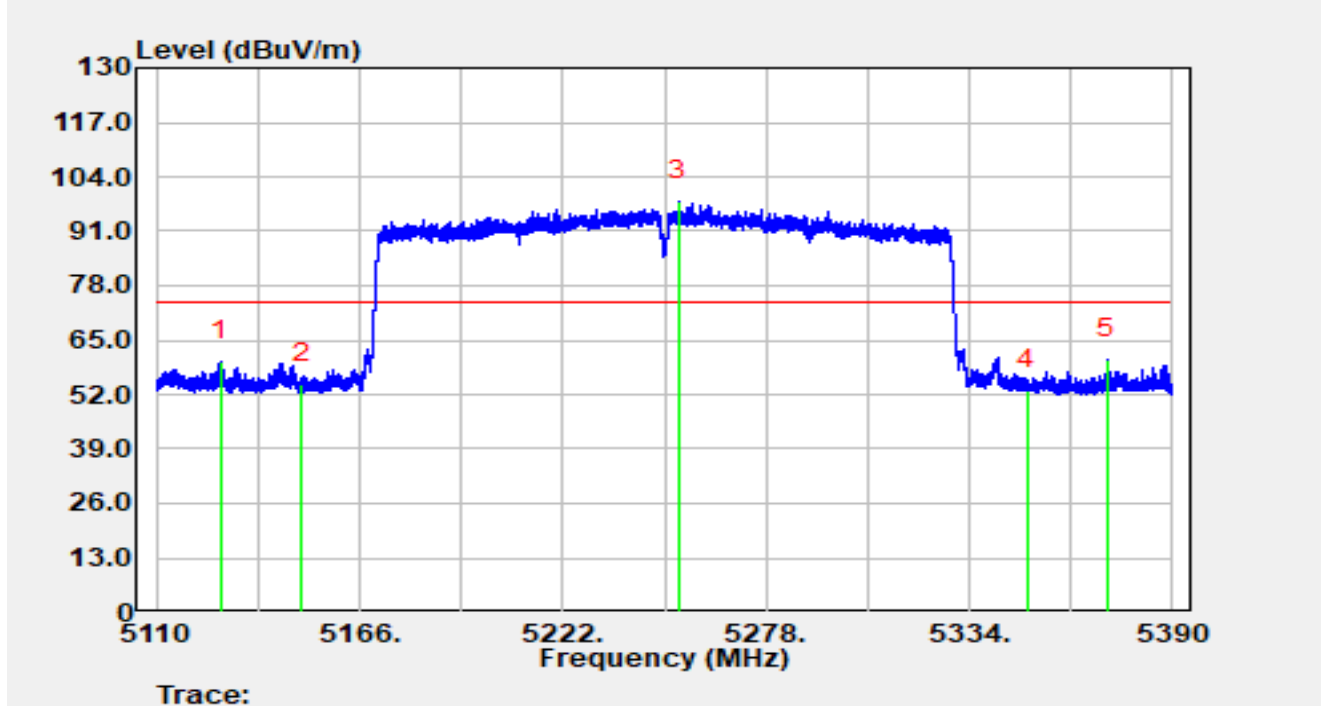


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5127.81	40.31	19.57	59.87	-14.13	74.00	Peak
2		5150.00	35.24	19.43	54.67	-19.33	74.00	Peak
3		5253.78	78.83	19.39	98.22	N/A	N/A	Peak
4		5350.00	33.35	19.85	53.20	-20.80	74.00	Peak
5	*	5372.02	40.48	19.92	60.39	-13.61	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

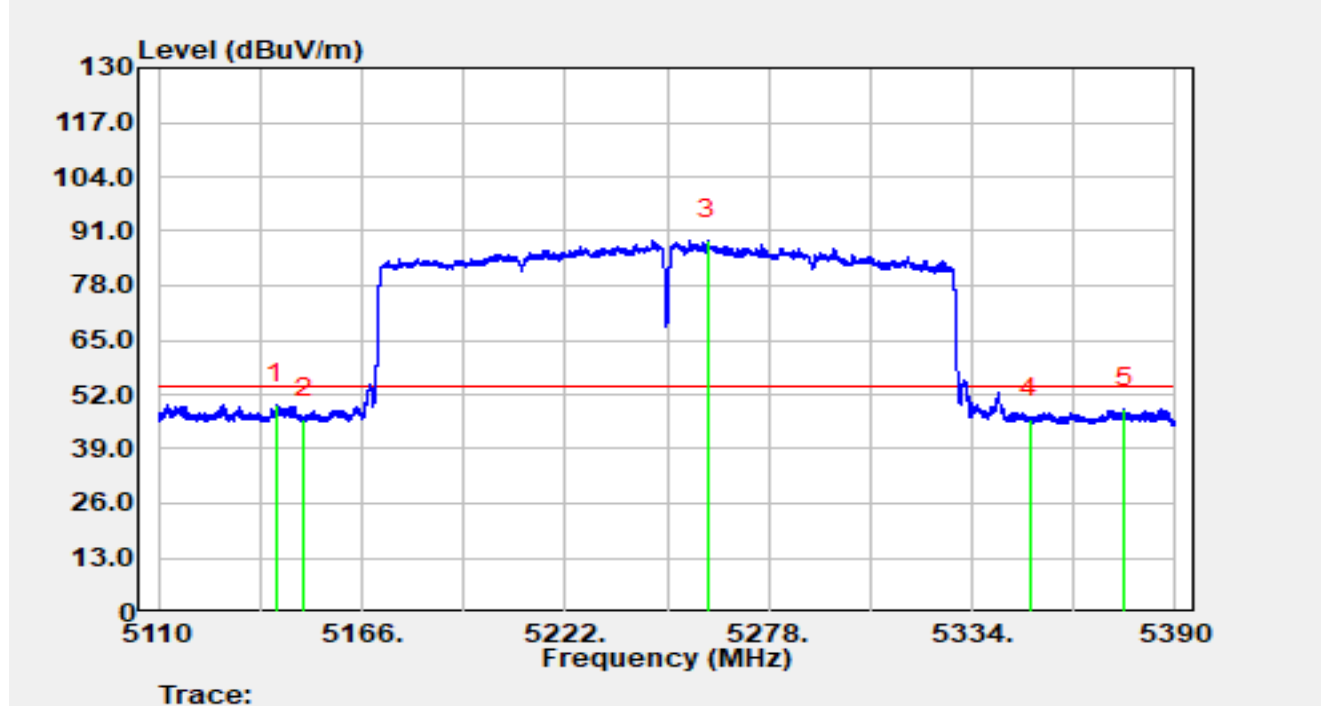


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.42	30.16	19.44	49.60	-4.40	54.00	Average
2		5150.00	26.70	19.43	46.13	-7.87	54.00	Average
3		5261.12	69.46	19.50	88.96	N/A	N/A	Average
4		5350.00	26.36	19.85	46.21	-7.79	54.00	Average
5		5376.03	28.68	19.94	48.62	-5.38	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

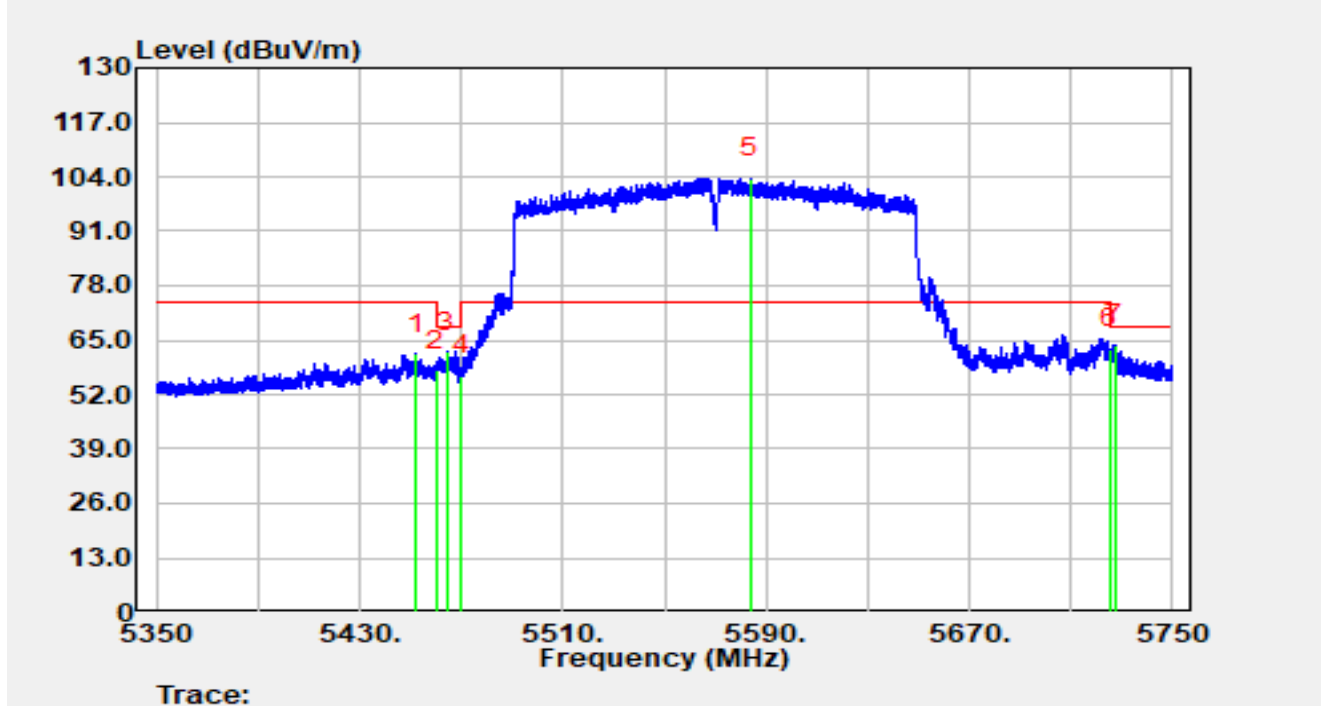


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.48	41.59	20.13	61.72	-12.28	74.00	Peak
2		5460.00	37.68	20.15	57.83	-10.37	68.20	Peak
3		5464.56	42.15	20.10	62.25	-5.95	68.20	Peak
4		5470.00	36.59	20.03	56.62	-11.58	68.20	Peak
5		5583.76	83.61	20.11	103.72	N/A	N/A	Peak
6		5725.00	41.53	21.34	62.87	-5.33	68.20	Peak
7	*	5727.44	42.53	21.33	63.86	-4.34	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

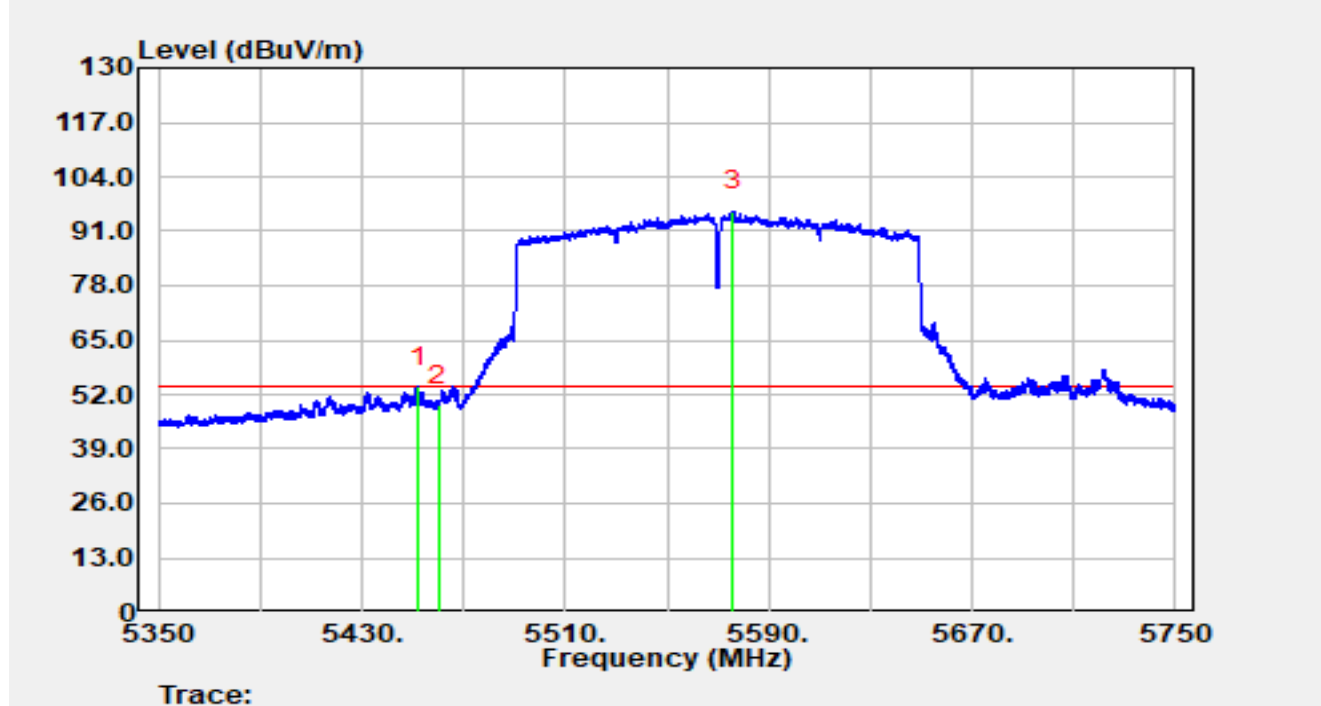


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.04	33.60	20.13	53.72	-0.28	54.00	Average
2		5460.00	29.38	20.15	49.53	-4.47	54.00	Average
3		5576.16	75.76	20.10	95.86	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

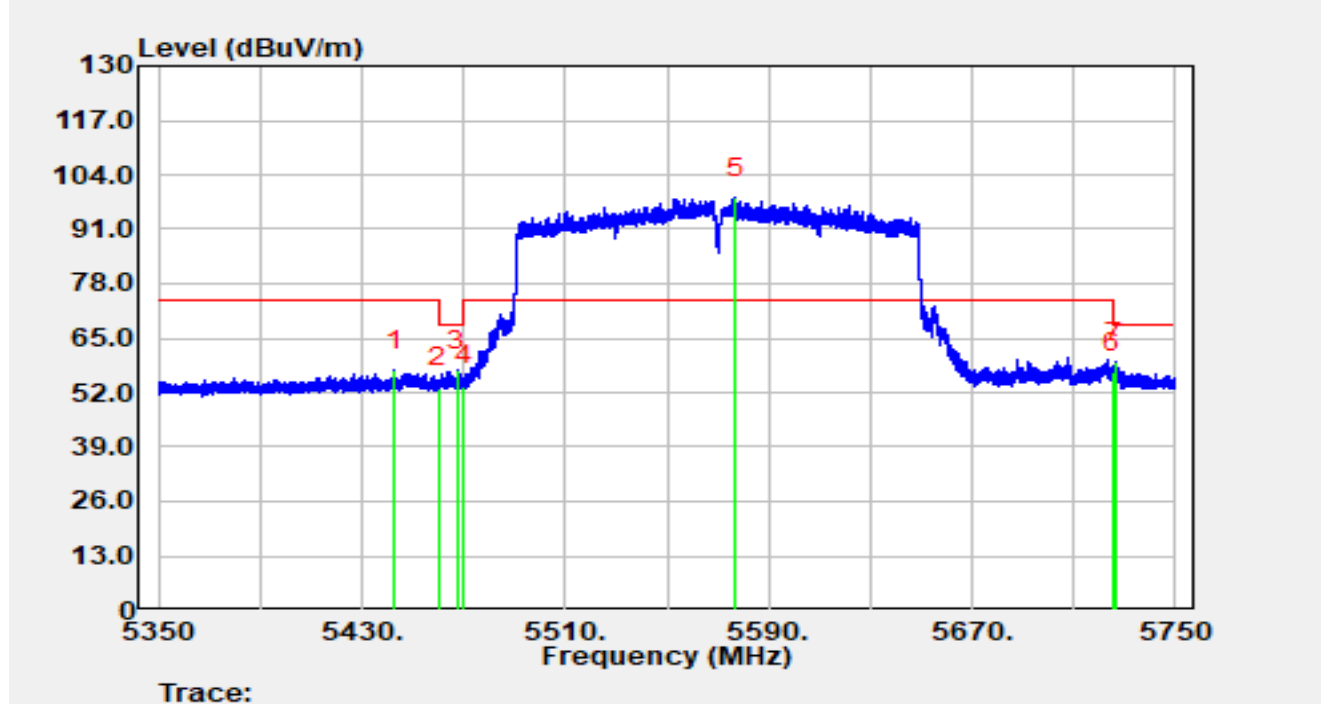


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5443.00	37.15	20.08	57.22	-16.78	74.00	Peak
2		5460.00	32.87	20.15	53.01	-15.19	68.20	Peak
3		5467.56	37.21	20.06	57.28	-10.92	68.20	Peak
4		5470.00	33.58	20.03	53.62	-14.58	68.20	Peak
5		5576.80	78.45	20.10	98.55	N/A	N/A	Peak
6		5725.00	35.37	21.34	56.71	-11.49	68.20	Peak
7	*	5726.44	37.80	21.33	59.13	-9.07	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

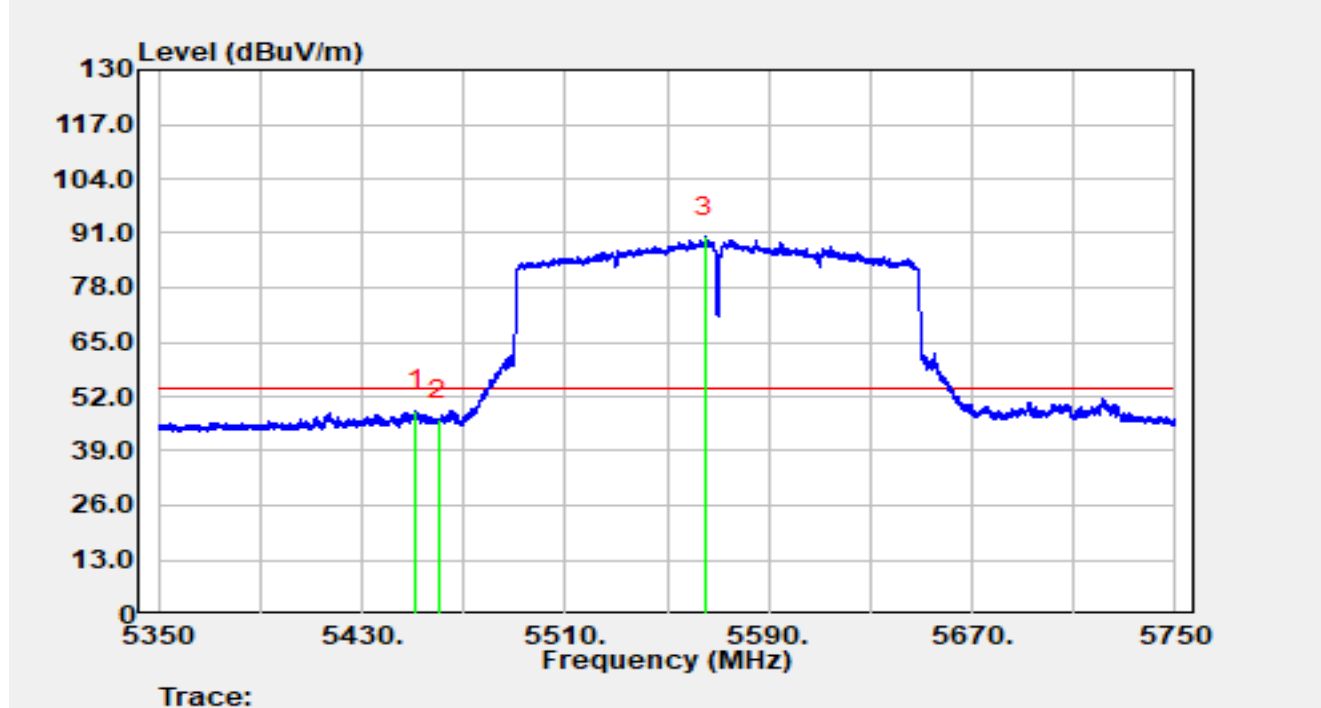


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5451.44	28.56	20.12	48.69	-5.31	54.00	Average
2		5460.00	26.35	20.15	46.50	-7.50	54.00	Average
3		5565.00	69.92	20.15	90.07	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

MIMO Mode - Ant 1 & Ant 2

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5180MHz		

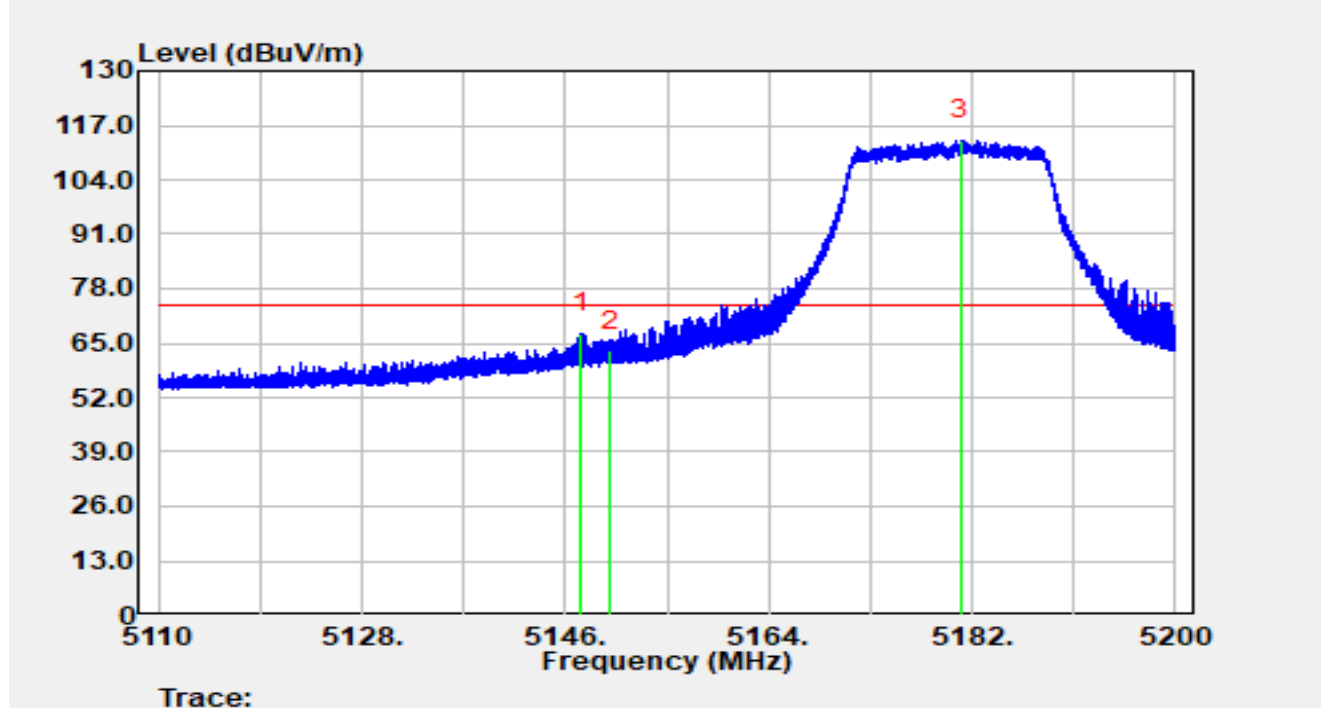


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.43	47.84	19.43	67.28	-6.72	74.00	Peak
2		5150.00	43.68	19.43	63.11	-10.89	74.00	Peak
3		5181.02	93.75	19.80	113.55	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5180MHz		

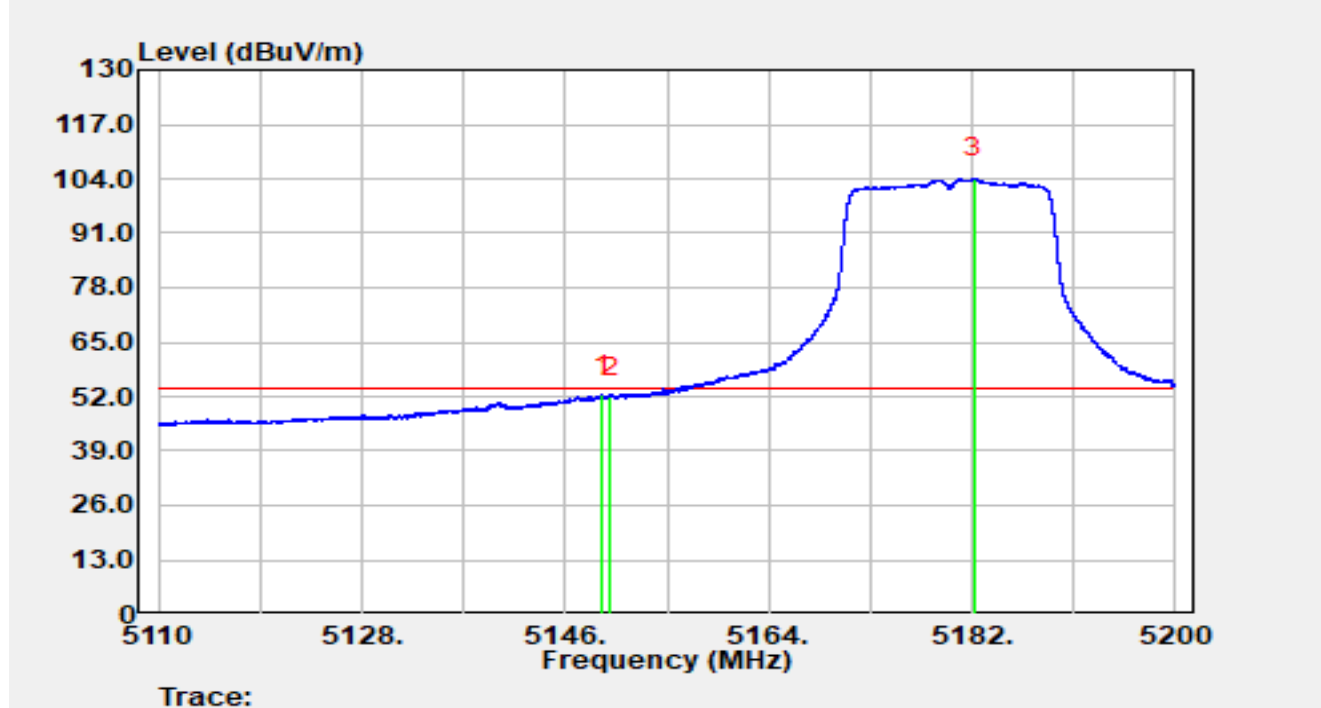


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.23	32.88	19.43	52.32	-1.68	54.00	Average
2		5150.00	32.52	19.43	51.95	-2.05	54.00	Average
3		5182.12	84.28	19.81	104.08	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5180MHz		

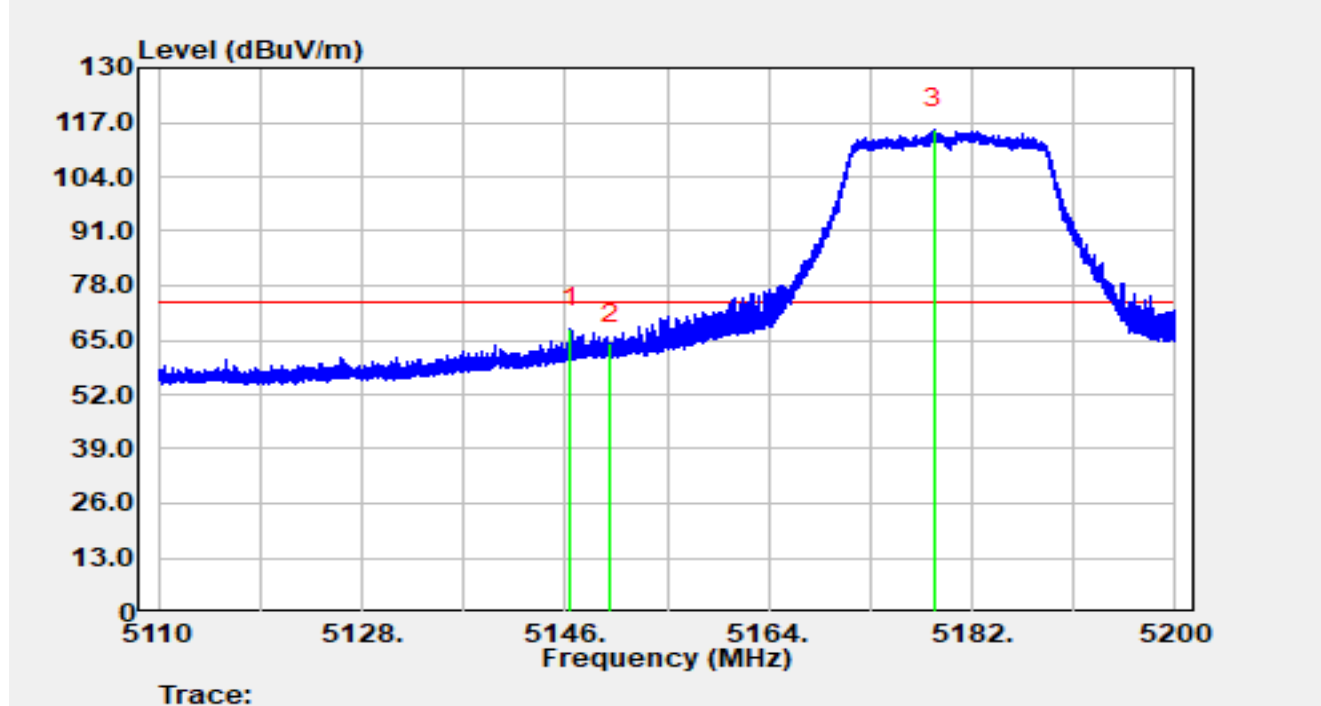


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.43	48.36	19.44	67.80	-6.20	74.00	Peak
2		5150.00	44.64	19.43	64.07	-9.93	74.00	Peak
3		5178.67	95.61	19.78	115.39	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5180MHz		

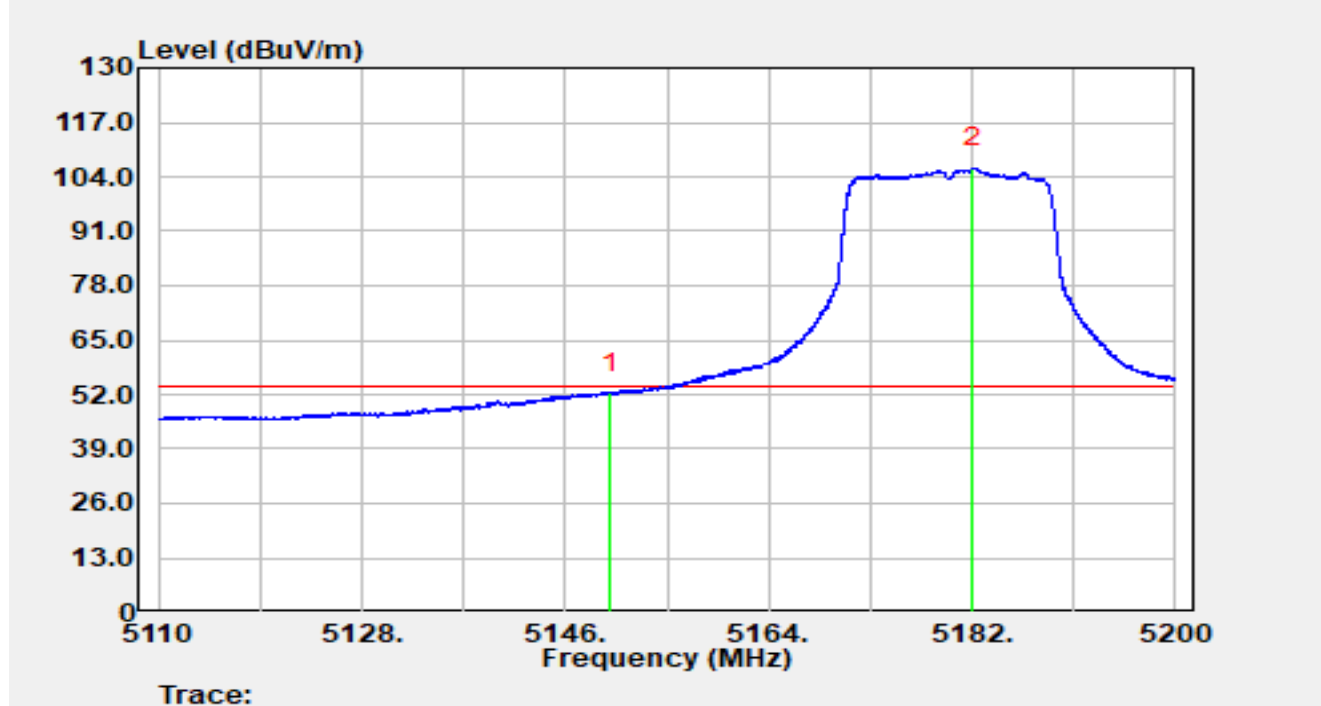


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	32.98	19.43	52.41	-1.59	54.00	Average
2		5182.09	86.32	19.81	106.13	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (2) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5320MHz		

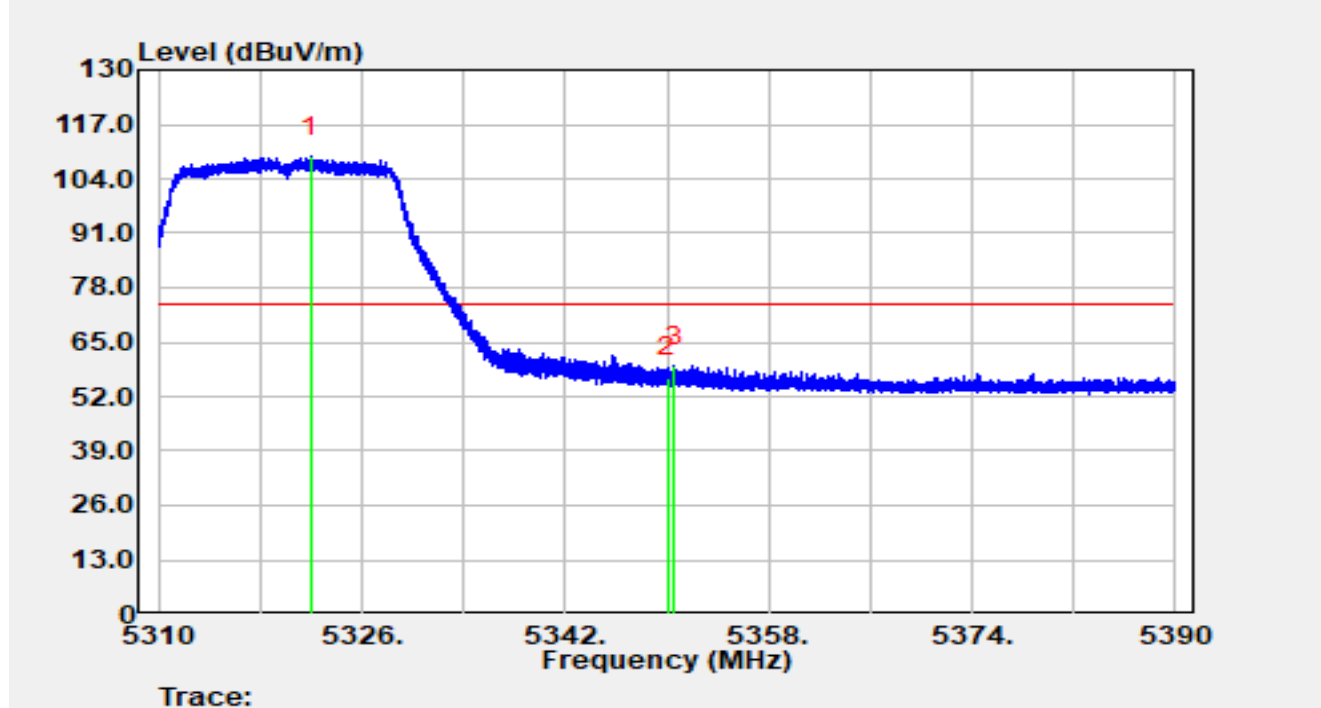


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.98	89.69	19.54	109.23	N/A	N/A	Peak
2		5350.00	36.80	19.85	56.66	-17.34	74.00	Peak
3	*	5350.55	39.36	19.86	59.21	-14.79	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5320MHz		

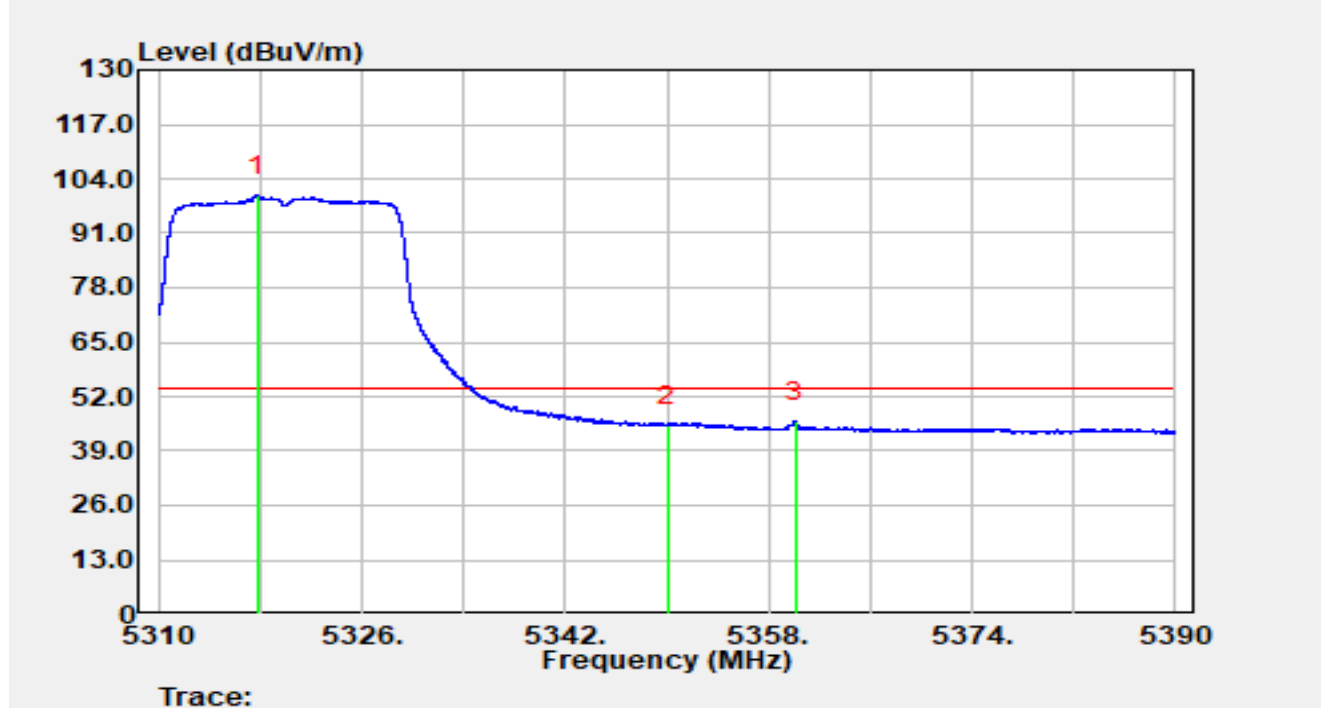


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.77	80.51	19.53	100.04	N/A	N/A	Average
2		5350.00	25.17	19.85	45.02	-8.98	54.00	Average
3	*	5360.06	26.19	19.91	46.10	-7.90	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5320MHz		

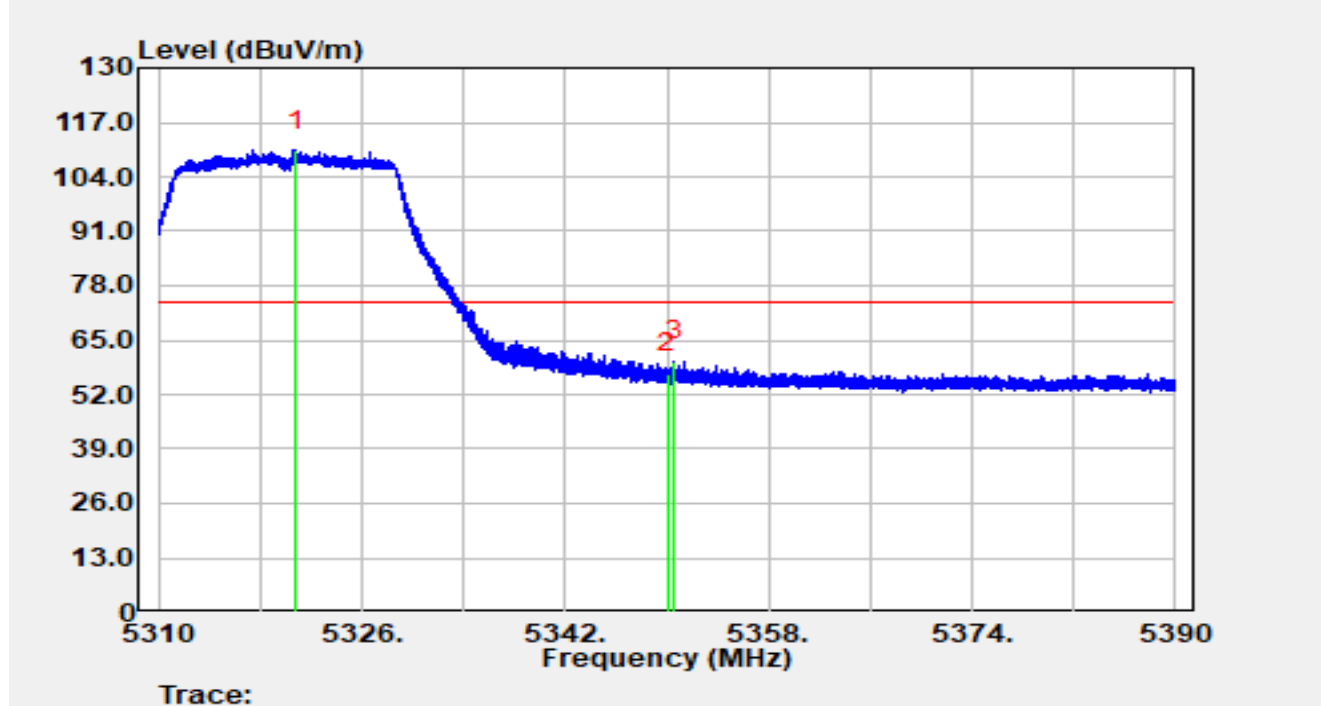


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.79	90.79	19.54	110.33	N/A	N/A	Peak
2		5350.00	37.11	19.85	56.96	-17.04	74.00	Peak
3	*	5350.60	40.23	19.86	60.09	-13.91	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5320MHz		

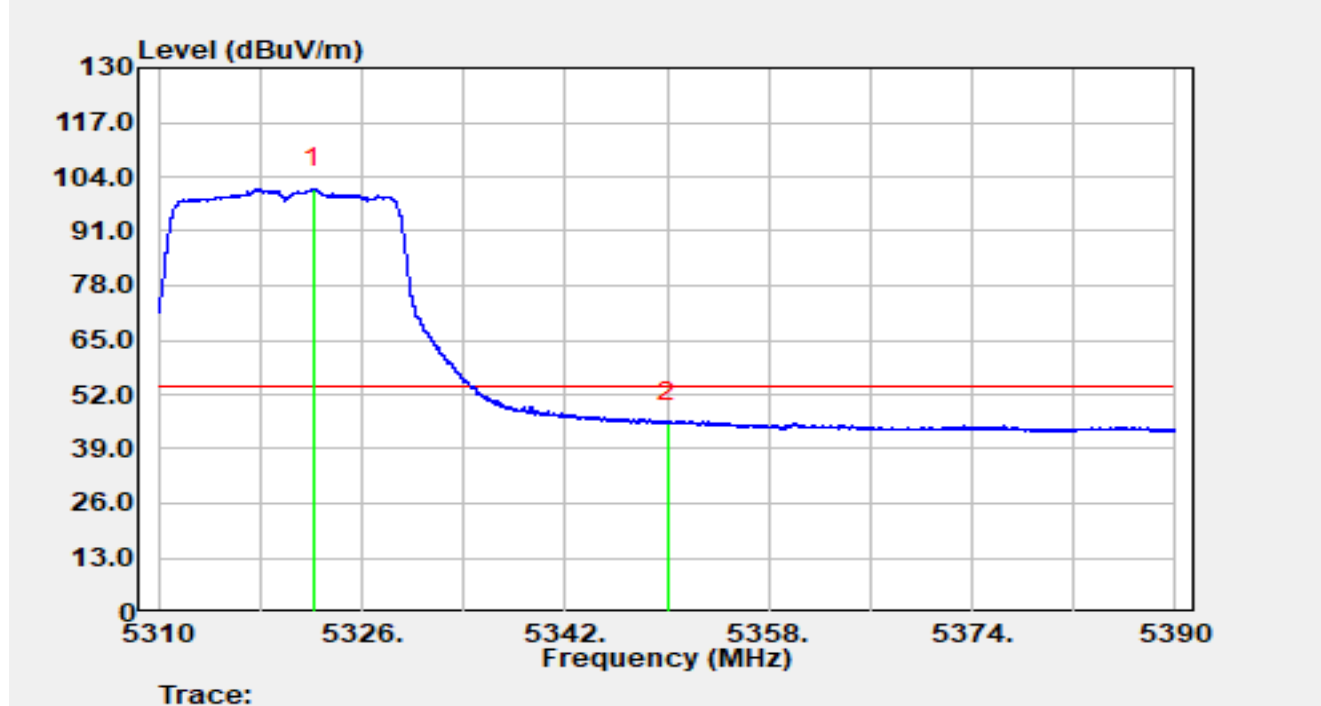


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.18	81.55	19.54	101.10	N/A	N/A	Average
2	*	5350.00	25.37	19.85	45.23	-8.77	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5500MHz		

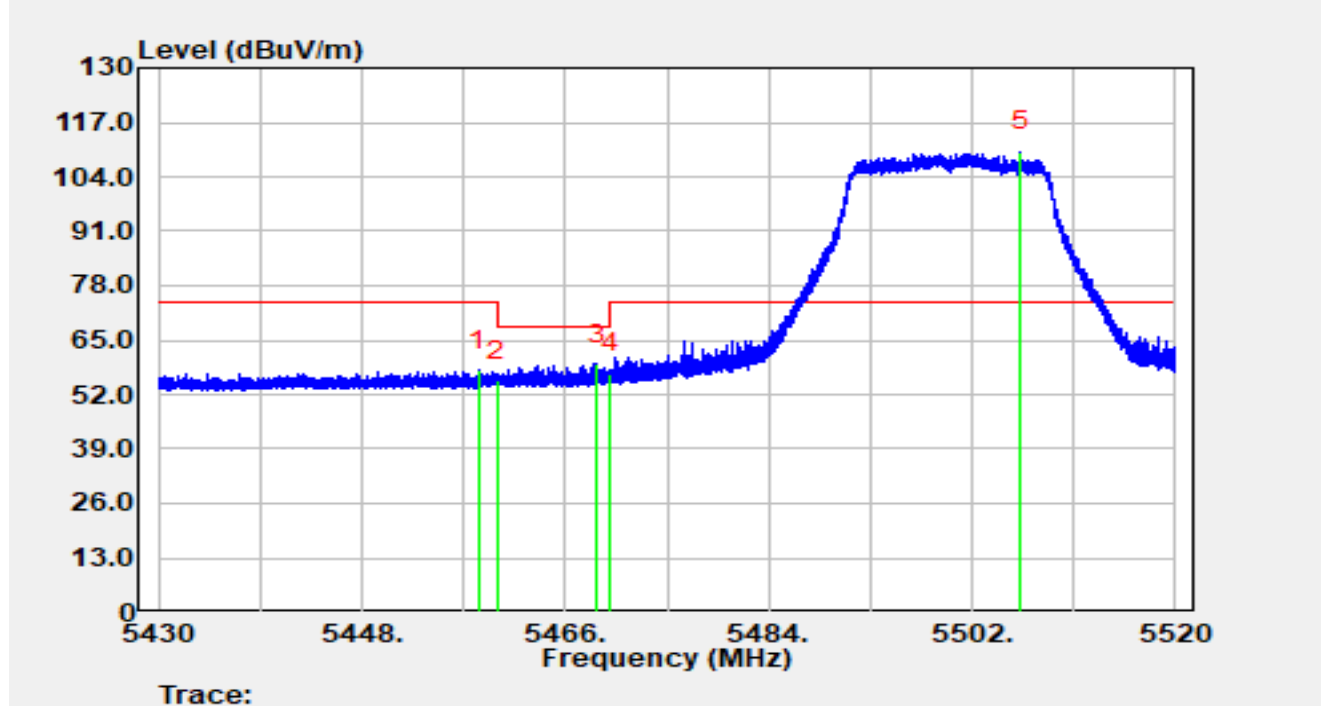


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.28	37.65	20.14	57.79	-16.21	74.00	Peak
2		5460.00	35.06	20.15	55.21	-12.99	68.20	Peak
3	*	5468.76	39.29	20.05	59.34	-8.86	68.20	Peak
4		5470.00	37.11	20.03	57.14	-11.06	68.20	Peak
5		5506.27	90.30	19.70	110.00	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5500MHz		

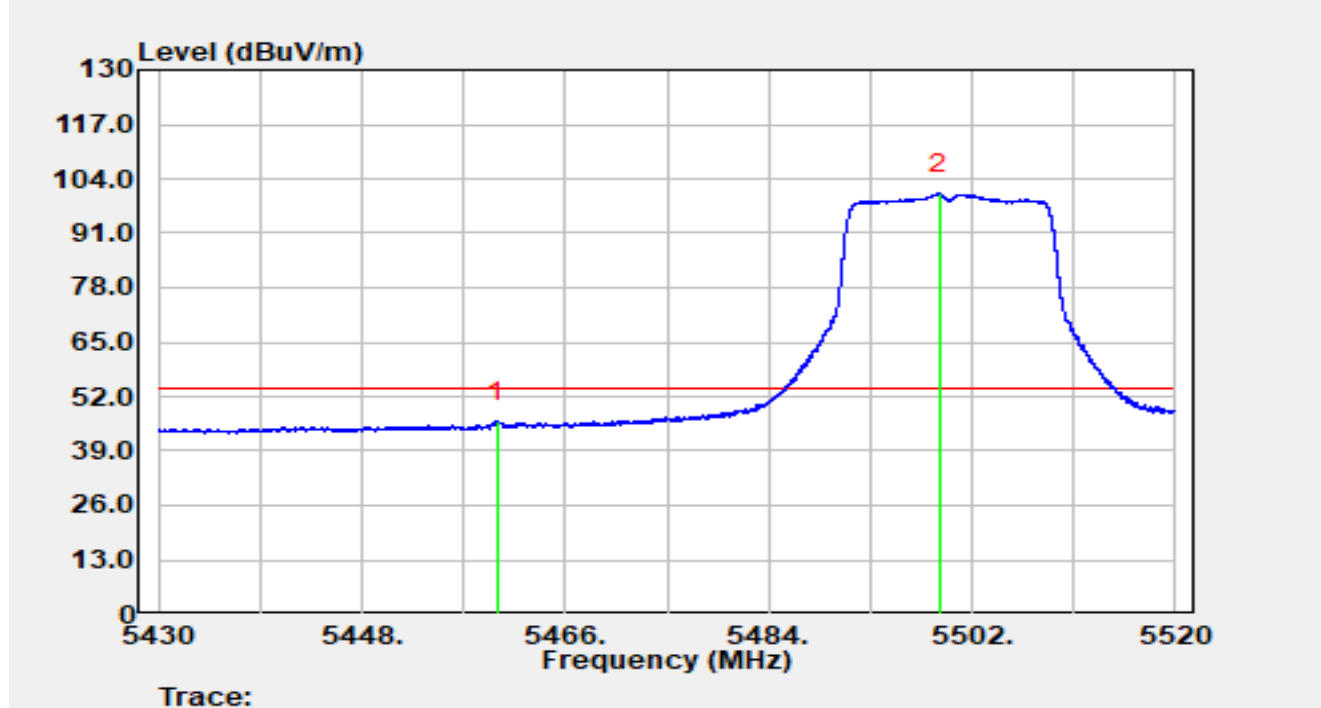


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	25.83	20.15	45.97	-8.03	54.00	Average
2		5499.06	80.72	19.67	100.39	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (2) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5500MHz		

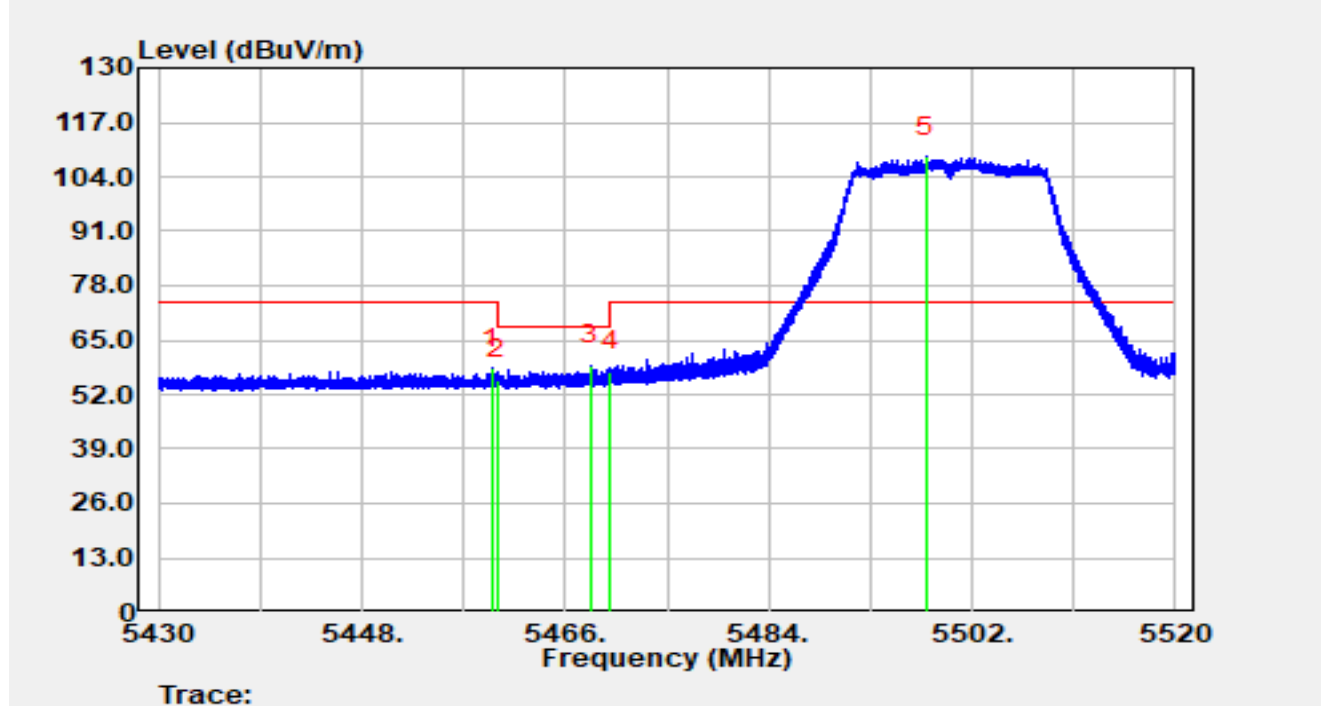


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.48	38.01	20.15	58.15	-15.85	74.00	Peak
2		5460.00	35.45	20.15	55.59	-12.61	68.20	Peak
3	*	5468.24	38.98	20.06	59.04	-9.16	68.20	Peak
4		5470.00	37.38	20.03	57.41	-10.79	68.20	Peak
5		5497.99	89.22	19.66	108.89	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5500MHz		

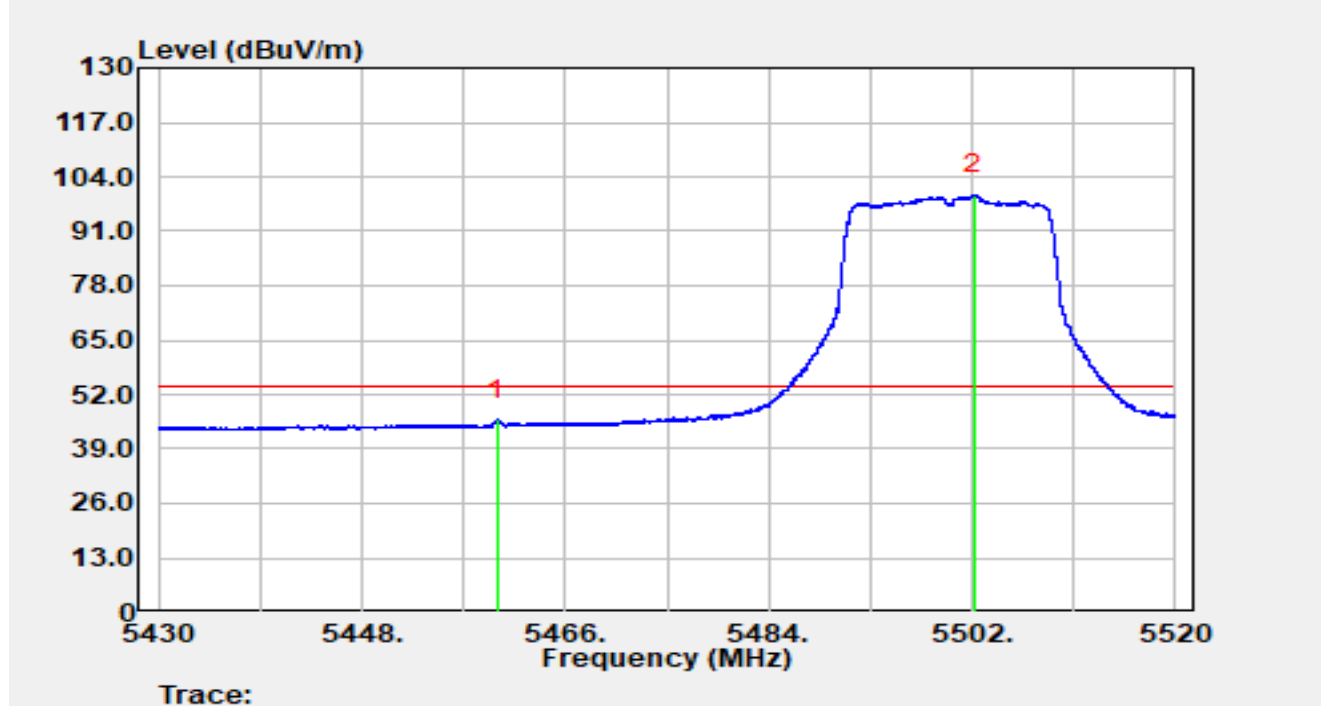


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	25.82	20.15	45.96	-8.04	54.00	Average
2		5502.14	80.01	19.68	99.69	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (2) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5700MHz		

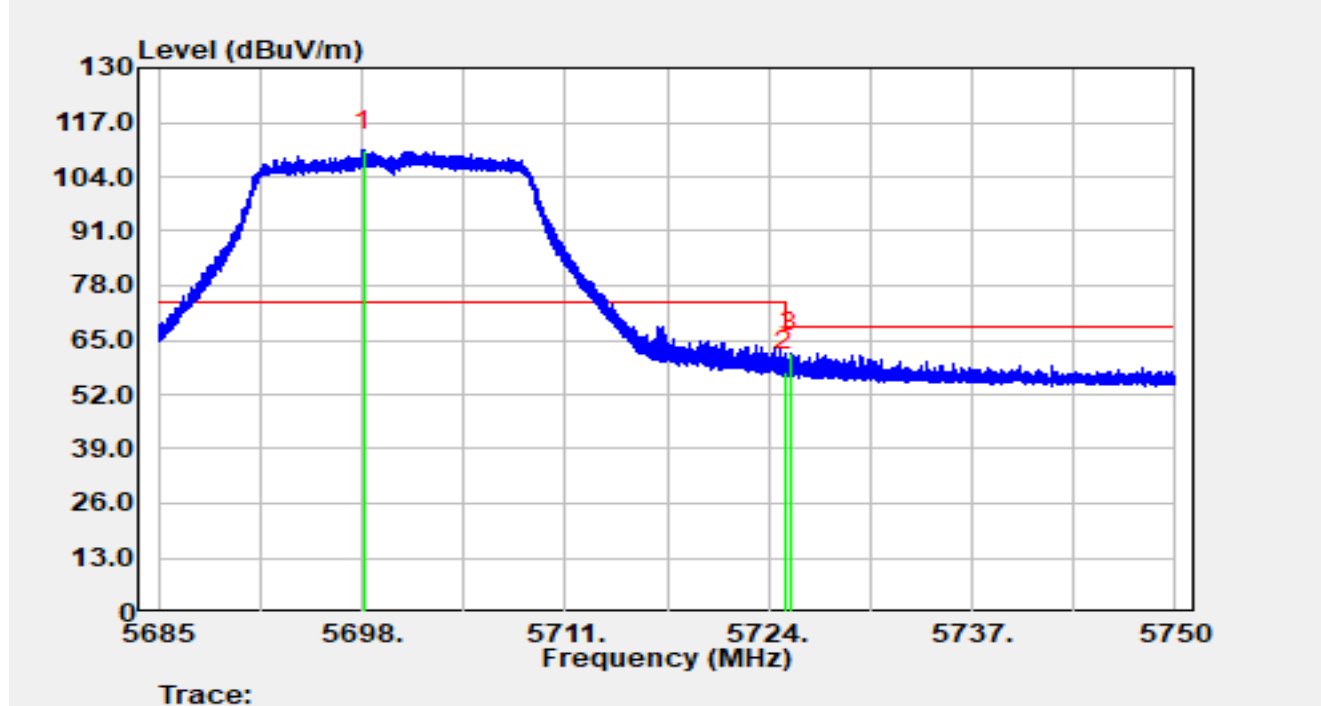


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5698.09	89.22	21.04	110.26	N/A	N/A	Peak
2		5725.00	36.29	21.34	57.63	-10.57	68.20	Peak
3	*	5725.40	40.62	21.34	61.96	-6.24	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5700MHz		

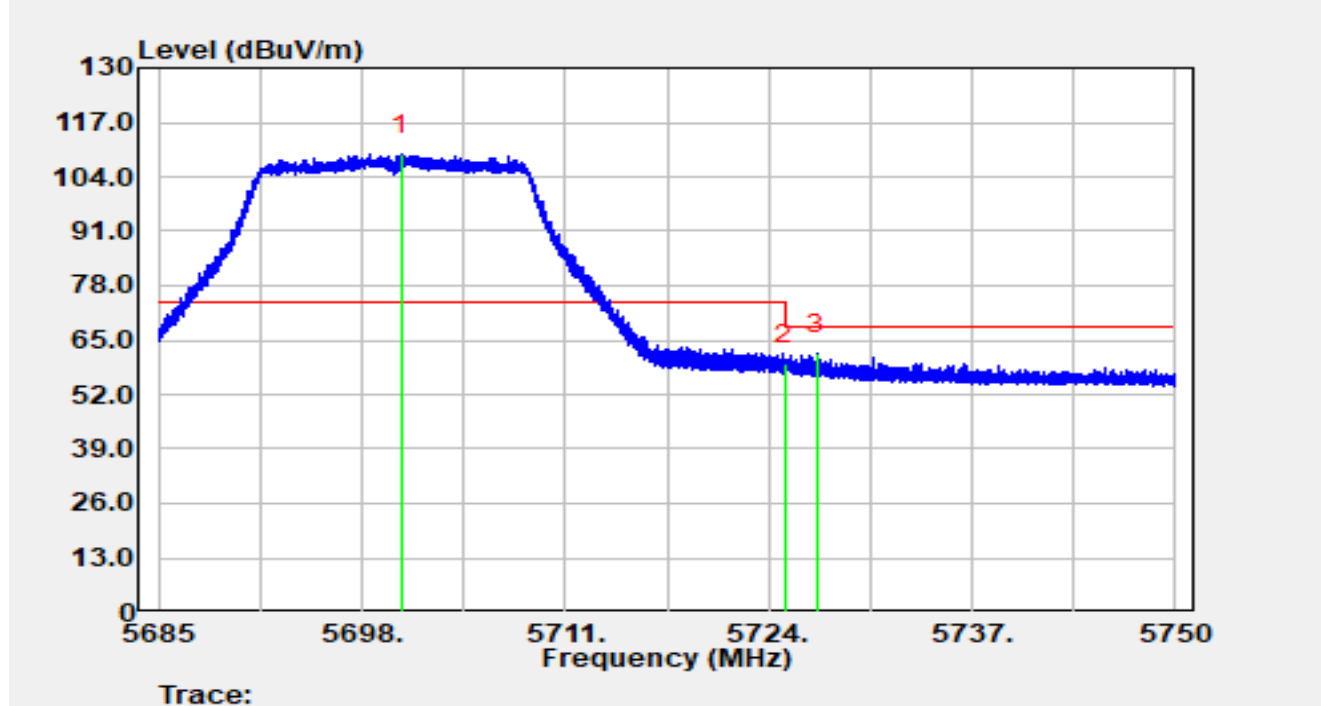


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5700.56	88.20	21.10	109.30	N/A	N/A	Peak
2		5725.00	37.97	21.34	59.31	-8.89	68.20	Peak
3	*	5727.09	40.45	21.33	61.78	-6.42	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5745MHz		

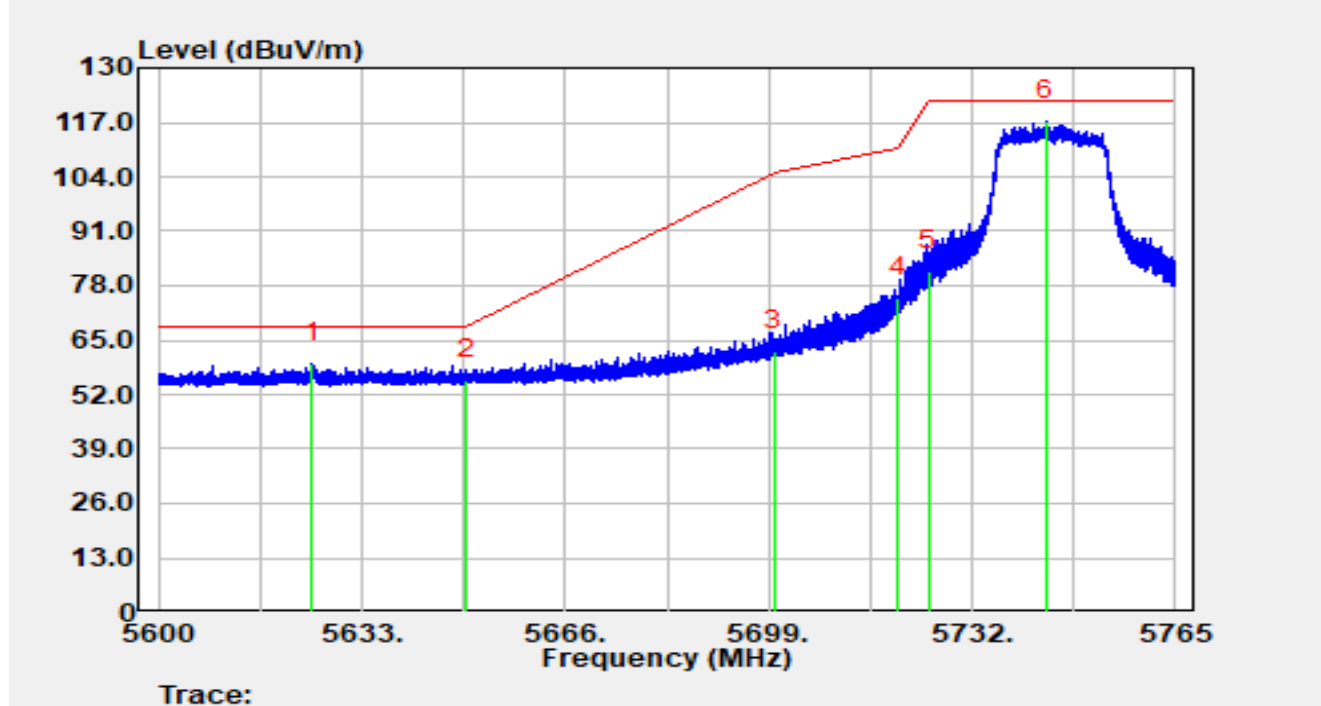


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5624.80	38.73	20.76	59.49	-8.71	68.20	Peak
2		5650.00	34.87	20.63	55.50	-12.70	68.20	Peak
3		5700.00	41.41	21.09	62.49	-42.71	105.20	Peak
4		5720.00	53.72	21.36	75.08	-35.72	110.80	Peak
5		5725.00	60.32	21.34	81.66	-40.54	122.20	Peak
6		5743.88	96.13	21.21	117.34	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-04
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5745MHz		

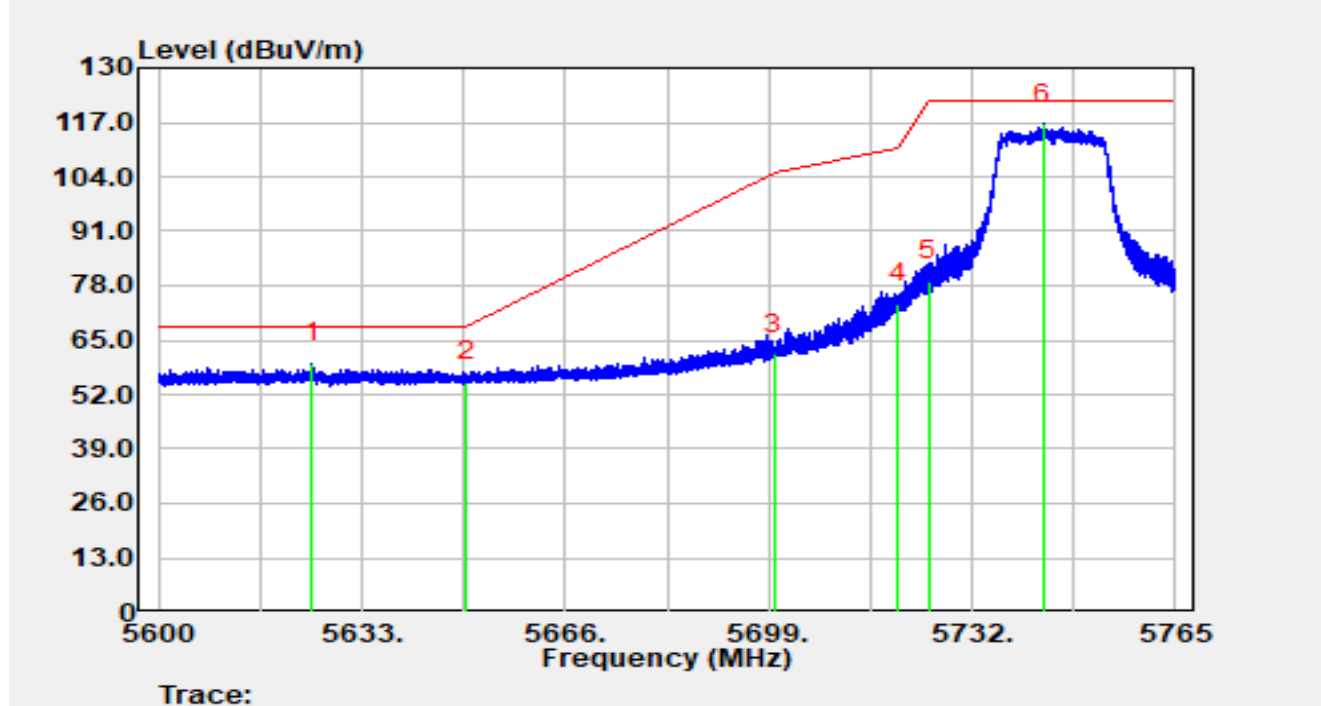


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5624.85	38.66	20.76	59.42	-8.78	68.20	Peak
2		5650.00	34.40	20.63	55.03	-13.17	68.20	Peak
3		5700.00	40.55	21.09	61.64	-43.56	105.20	Peak
4		5720.00	52.24	21.36	73.60	-37.20	110.80	Peak
5		5725.00	57.84	21.34	79.18	-43.02	122.20	Peak
6		5743.63	95.42	21.21	116.63	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5825MHz		

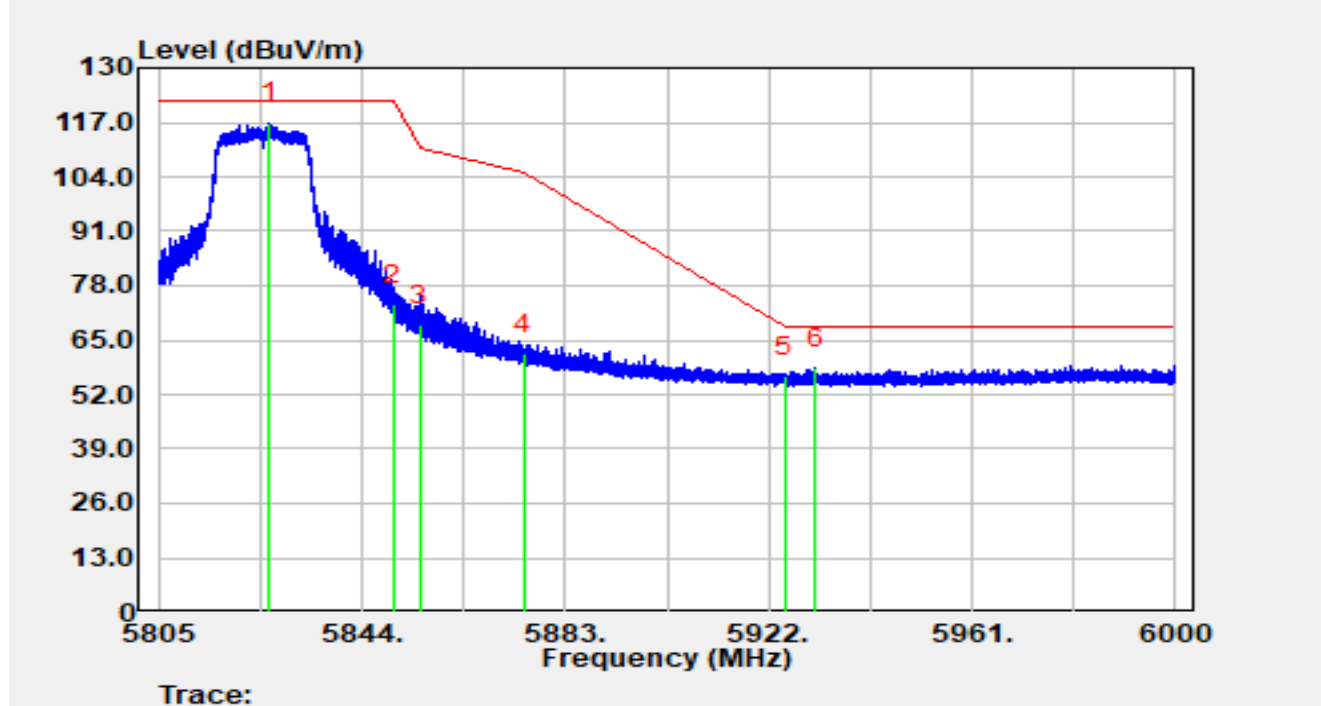


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.22	95.43	21.53	116.96	N/A	N/A	Peak
2		5850.00	52.21	21.33	73.54	-48.66	122.20	Peak
3		5855.00	47.13	21.33	68.45	-42.35	110.80	Peak
4		5875.00	40.04	21.59	61.64	-43.56	105.20	Peak
5		5925.00	34.87	21.49	56.36	-11.84	68.20	Peak
6	*	5930.91	36.70	21.47	58.17	-10.03	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5825MHz		

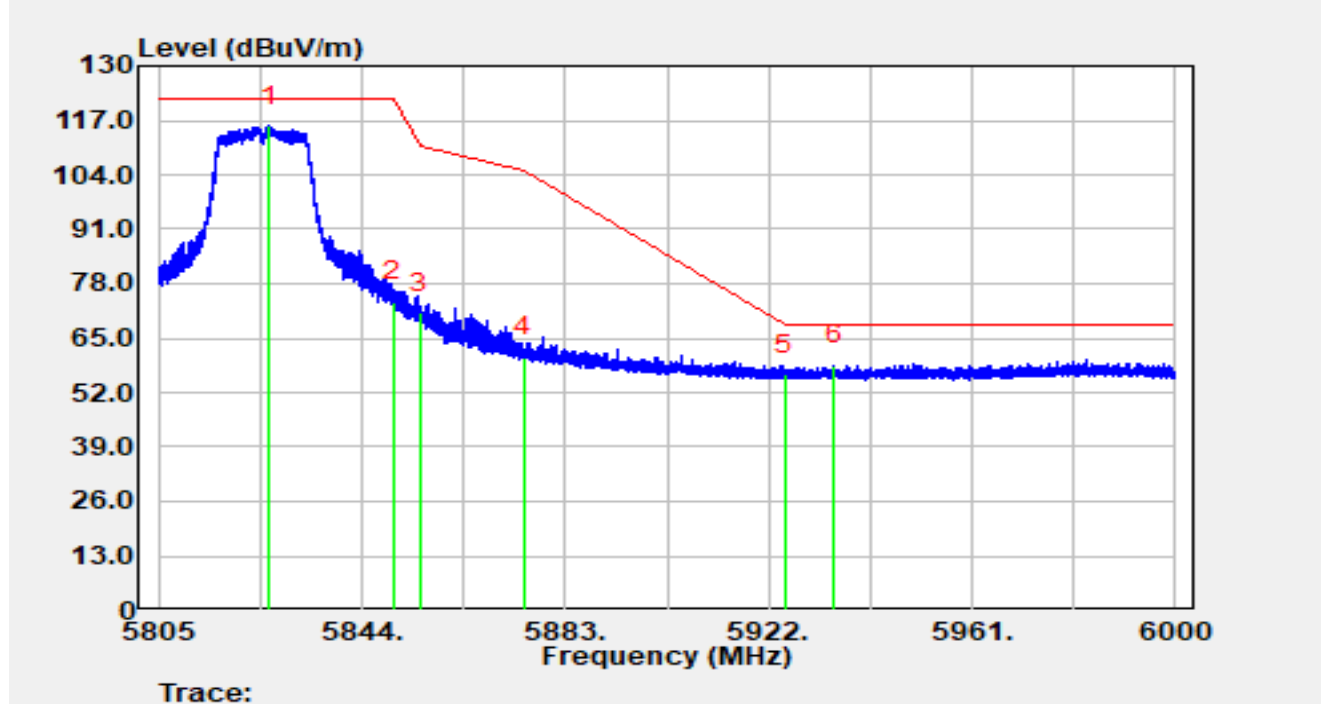


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.14	94.03	21.53	115.56	N/A	N/A	Peak
2		5850.00	52.46	21.33	73.79	-48.41	122.20	Peak
3		5855.00	49.63	21.33	70.96	-39.84	110.80	Peak
4		5875.00	38.79	21.59	60.39	-44.81	105.20	Peak
5		5925.00	34.84	21.49	56.34	-11.86	68.20	Peak
6	*	5934.60	37.15	21.47	58.61	-9.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5190MHz		

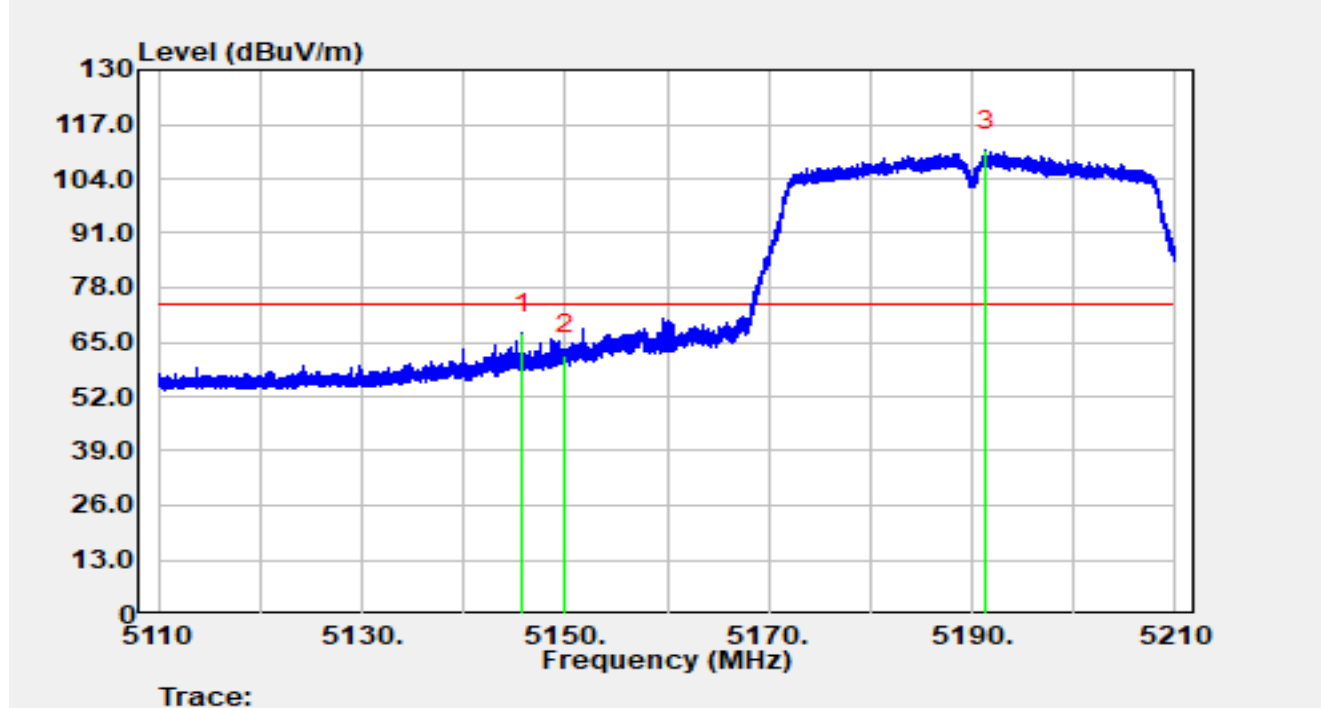


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.79	47.67	19.44	67.11	-6.89	74.00	Peak
2		5150.00	42.42	19.43	61.85	-12.15	74.00	Peak
3		5191.35	90.94	19.78	110.72	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5190MHz		

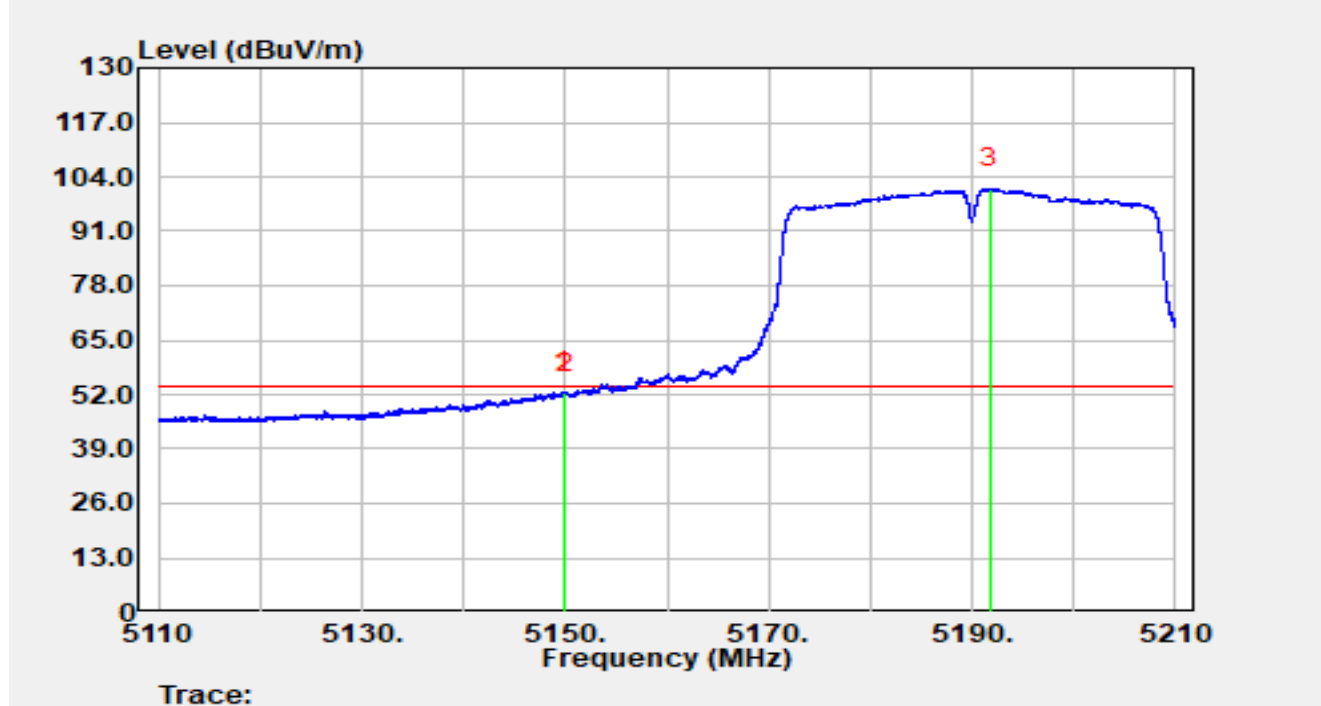


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.87	33.15	19.43	52.58	-1.42	54.00	Average
2		5150.00	32.66	19.43	52.09	-1.91	54.00	Average
3		5191.75	81.44	19.78	101.22	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5190MHz		

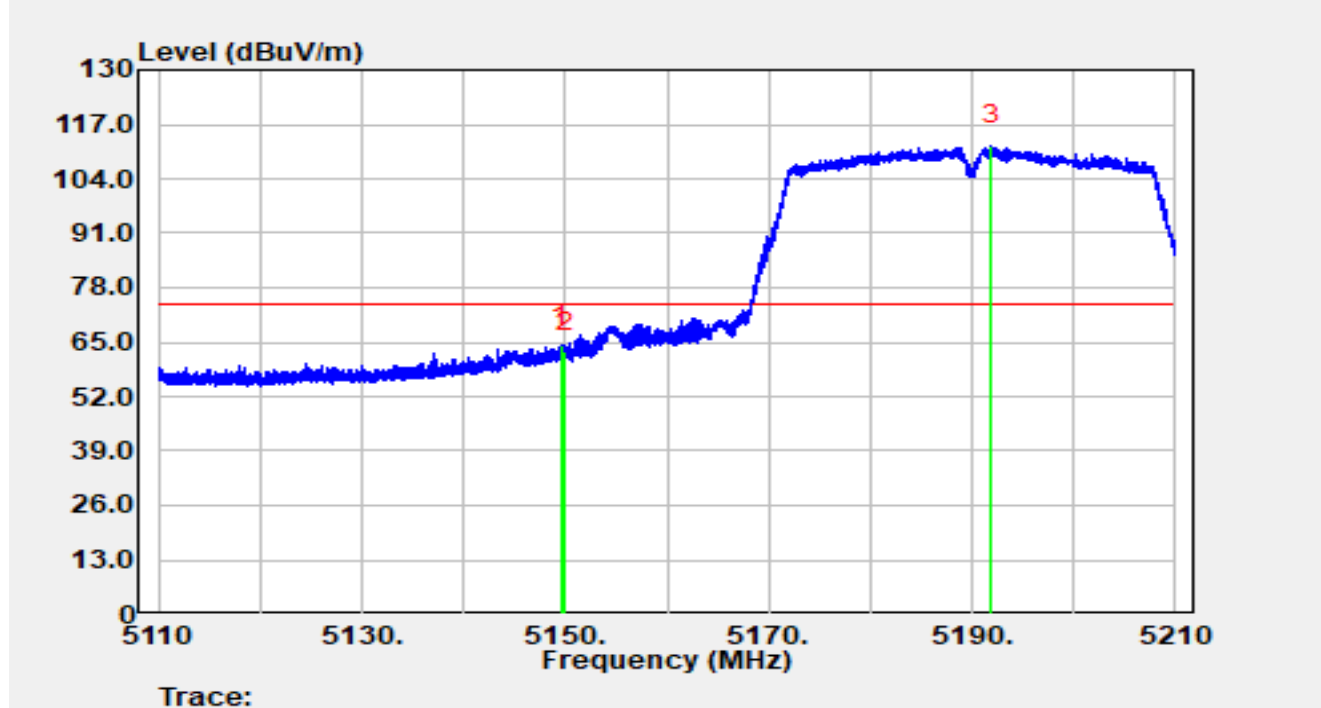


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.59	44.67	19.43	64.10	-9.90	74.00	Peak
2		5150.00	43.26	19.43	62.69	-11.31	74.00	Peak
3		5191.84	92.08	19.78	111.86	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5190MHz		

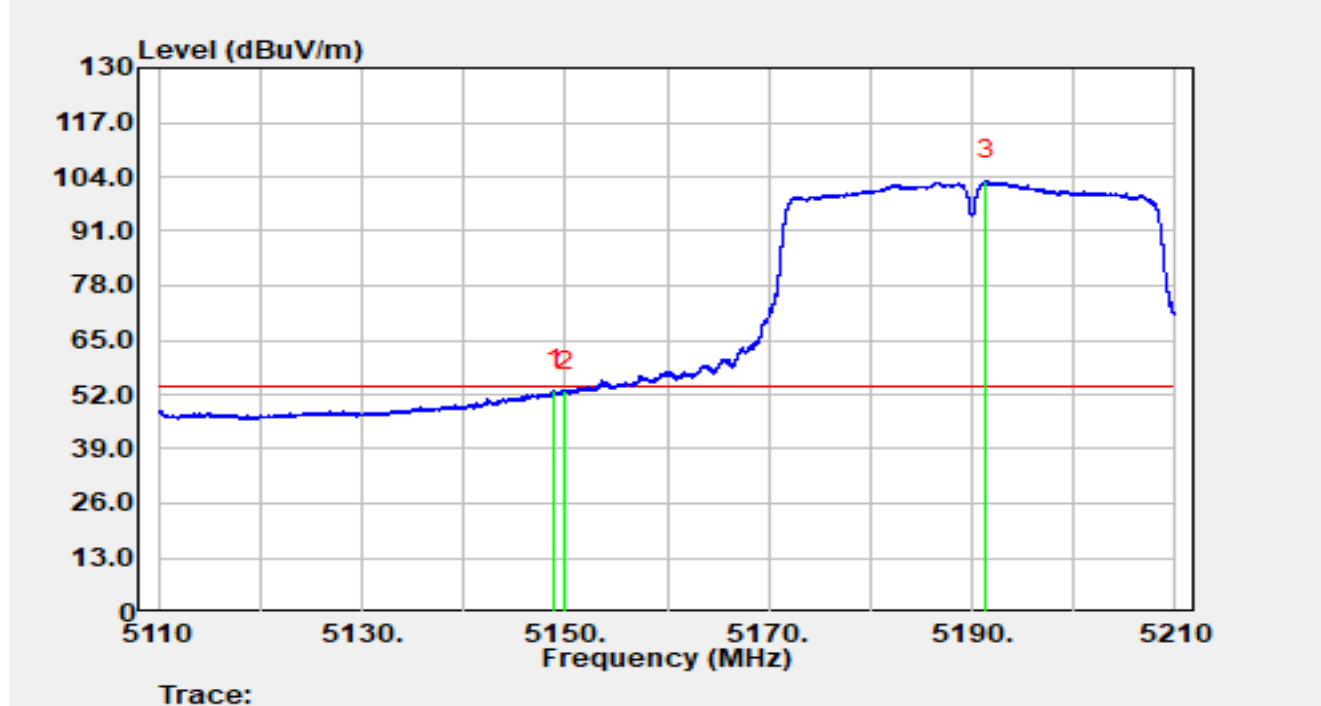


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.93	33.75	19.43	53.18	-0.82	54.00	Average
2		5150.00	33.47	19.43	52.90	-1.10	54.00	Average
3		5191.34	83.30	19.78	103.08	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5310MHz		

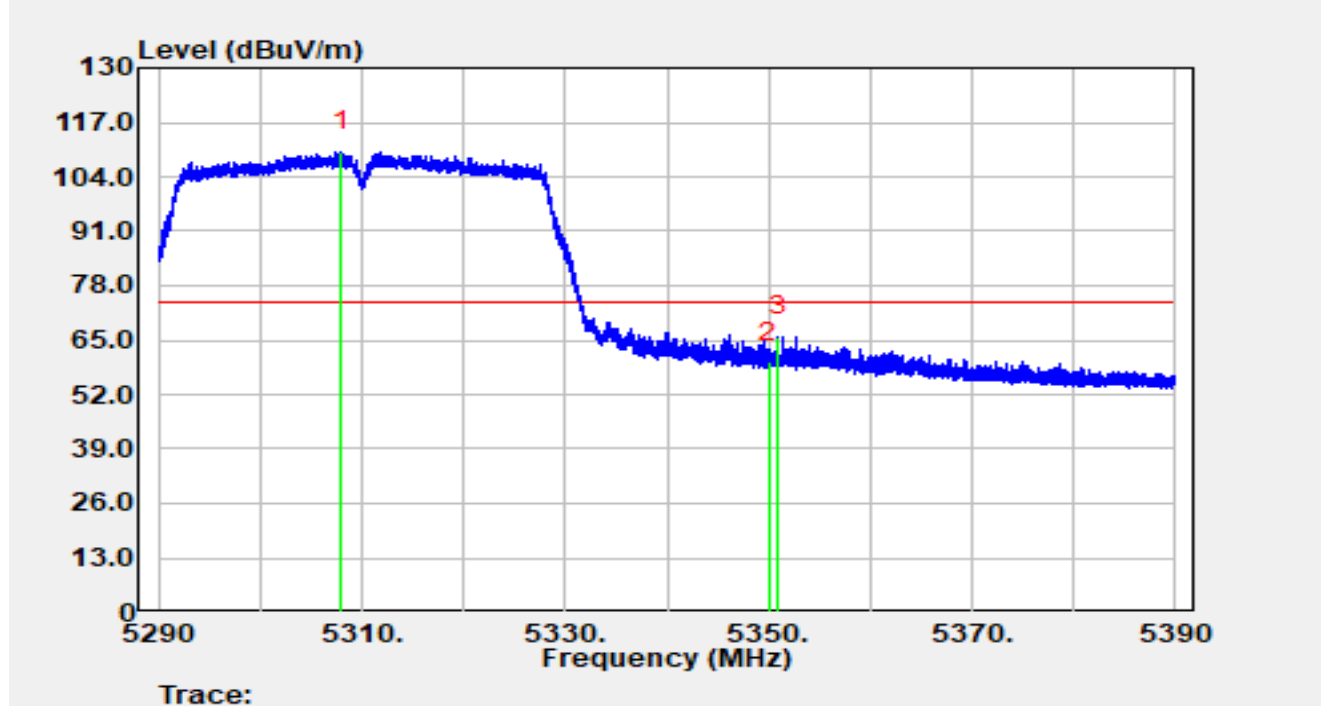


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.99	90.58	19.52	110.10	N/A	N/A	Peak
2		5350.00	39.84	19.85	59.69	-14.31	74.00	Peak
3	*	5350.96	45.95	19.86	65.81	-8.19	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5310MHz		

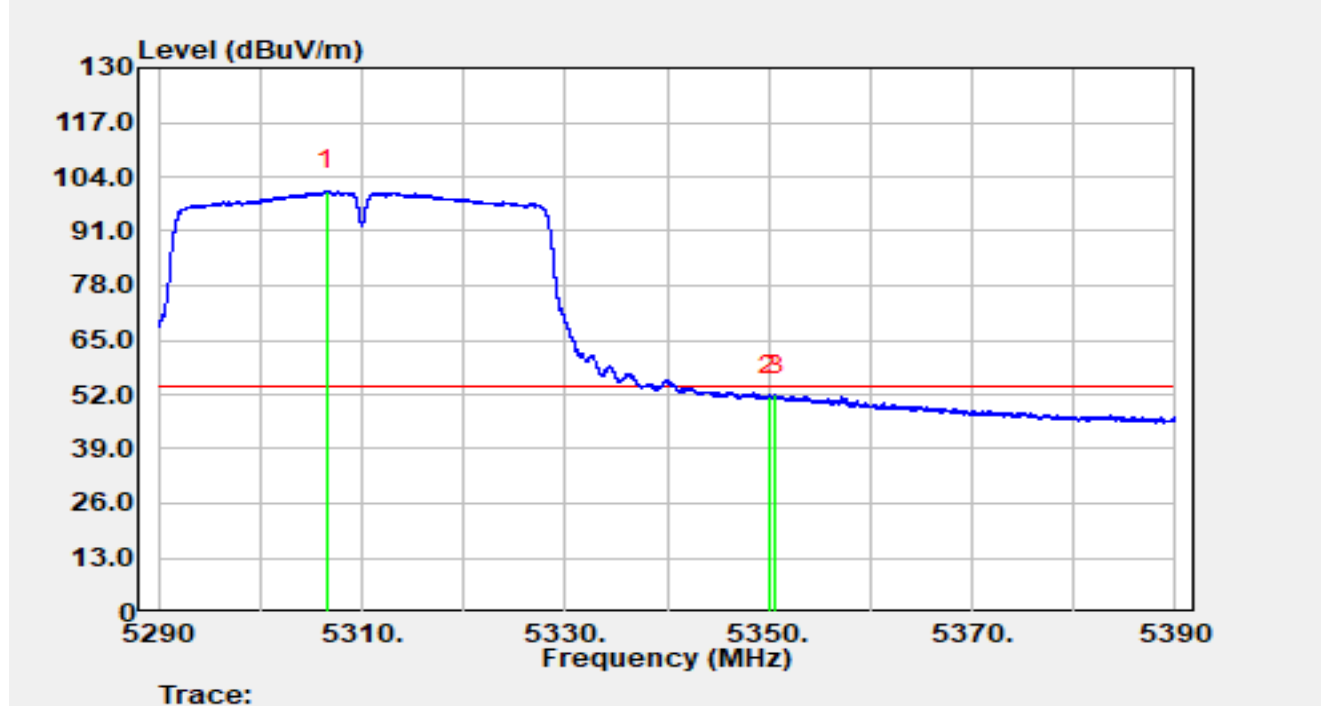


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.57	81.25	19.53	100.78	N/A	N/A	Average
2		5350.00	31.73	19.85	51.58	-2.42	54.00	Average
3	*	5350.62	32.11	19.86	51.97	-2.03	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5310MHz		

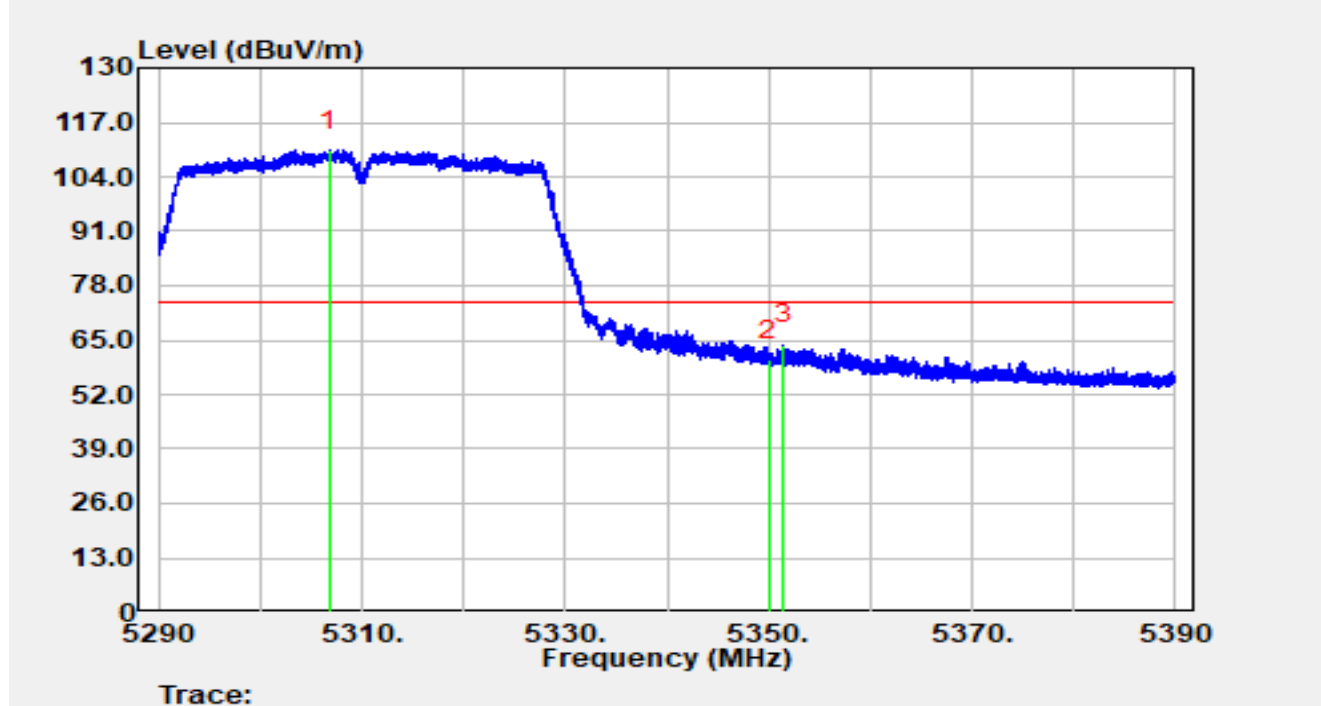


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.84	90.80	19.52	110.32	N/A	N/A	Peak
2		5350.00	40.35	19.85	60.20	-13.80	74.00	Peak
3	*	5351.52	44.14	19.86	64.01	-9.99	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5310MHz		

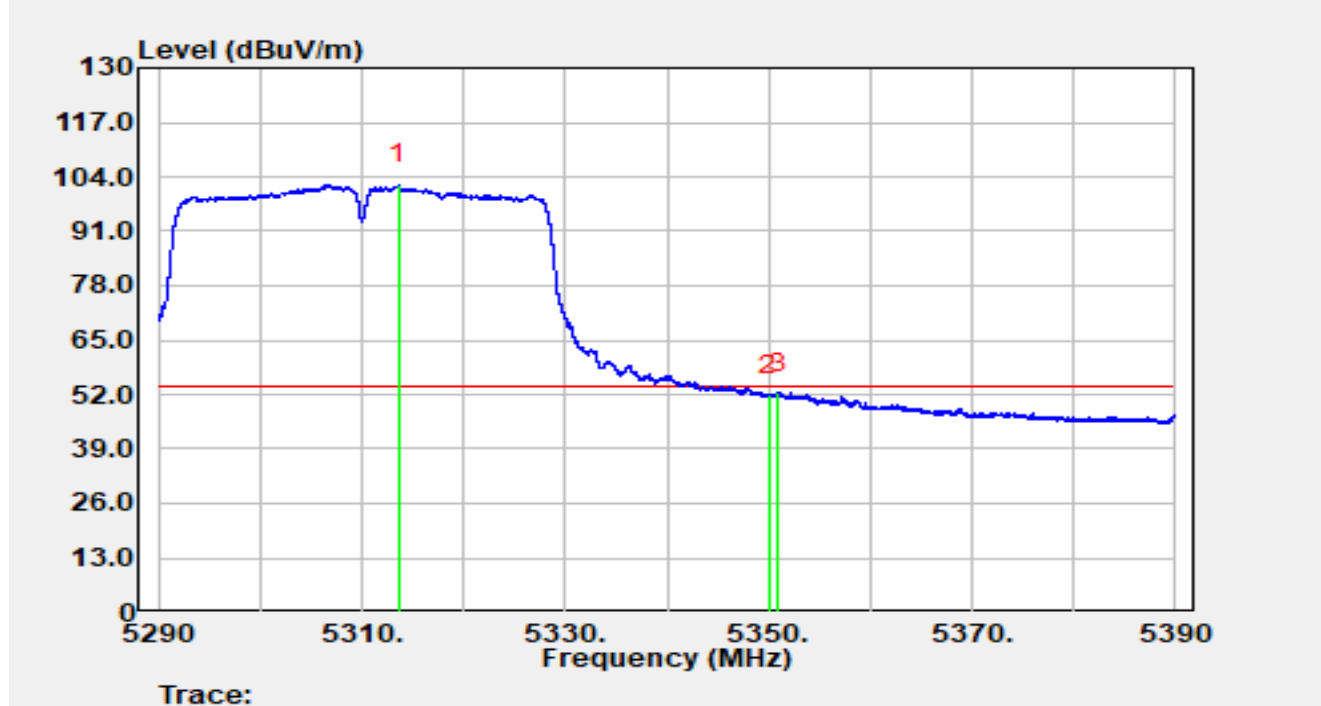


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.61	82.58	19.51	102.10	N/A	N/A	Average
2		5350.00	32.11	19.85	51.96	-2.04	54.00	Average
3	*	5350.94	32.60	19.86	52.46	-1.54	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5510MHz		

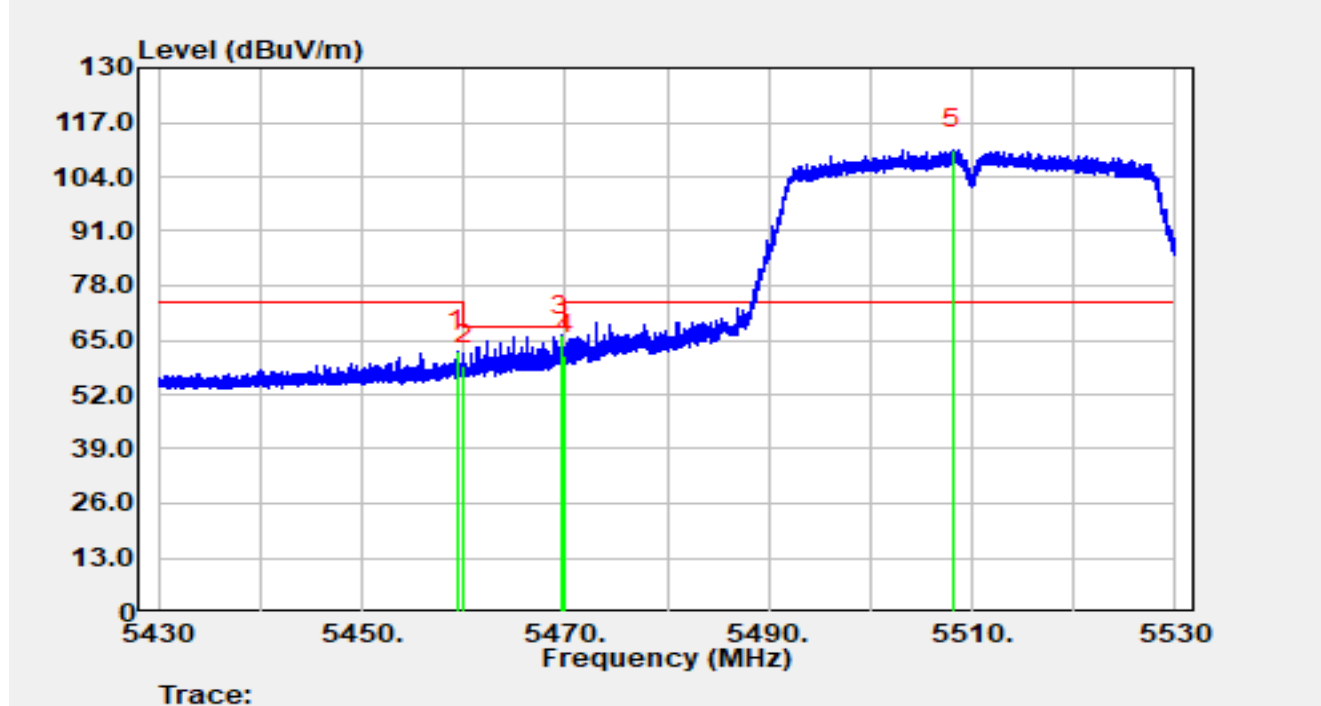


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.38	42.37	20.14	62.51	-11.49	74.00	Peak
2		5460.00	38.80	20.15	58.95	-9.25	68.20	Peak
3	*	5469.60	46.01	20.04	66.05	-2.15	68.20	Peak
4		5470.00	41.33	20.03	61.36	-6.84	68.20	Peak
5		5508.11	90.73	19.71	110.44	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5510MHz		

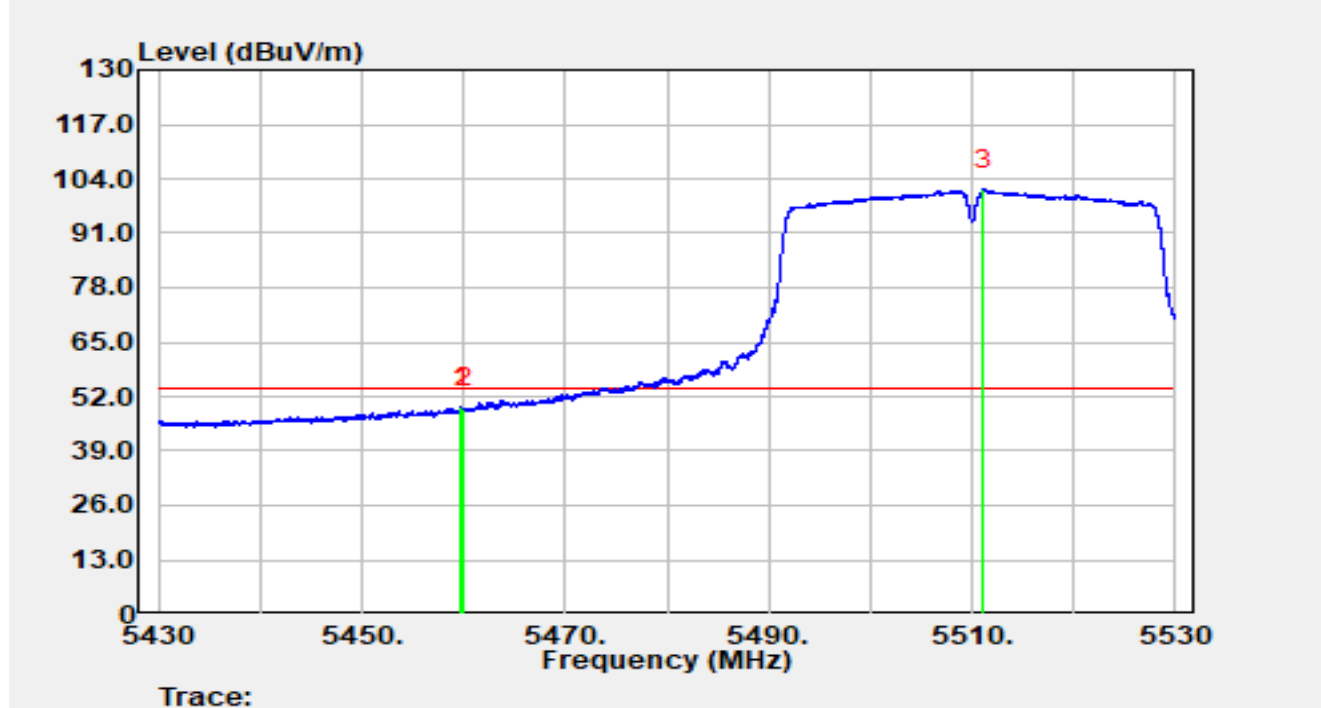


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.72	29.29	20.15	49.44	-4.56	54.00	Average
2		5460.00	28.96	20.15	49.11	-4.89	54.00	Average
3		5511.13	81.74	19.72	101.46	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5510MHz		

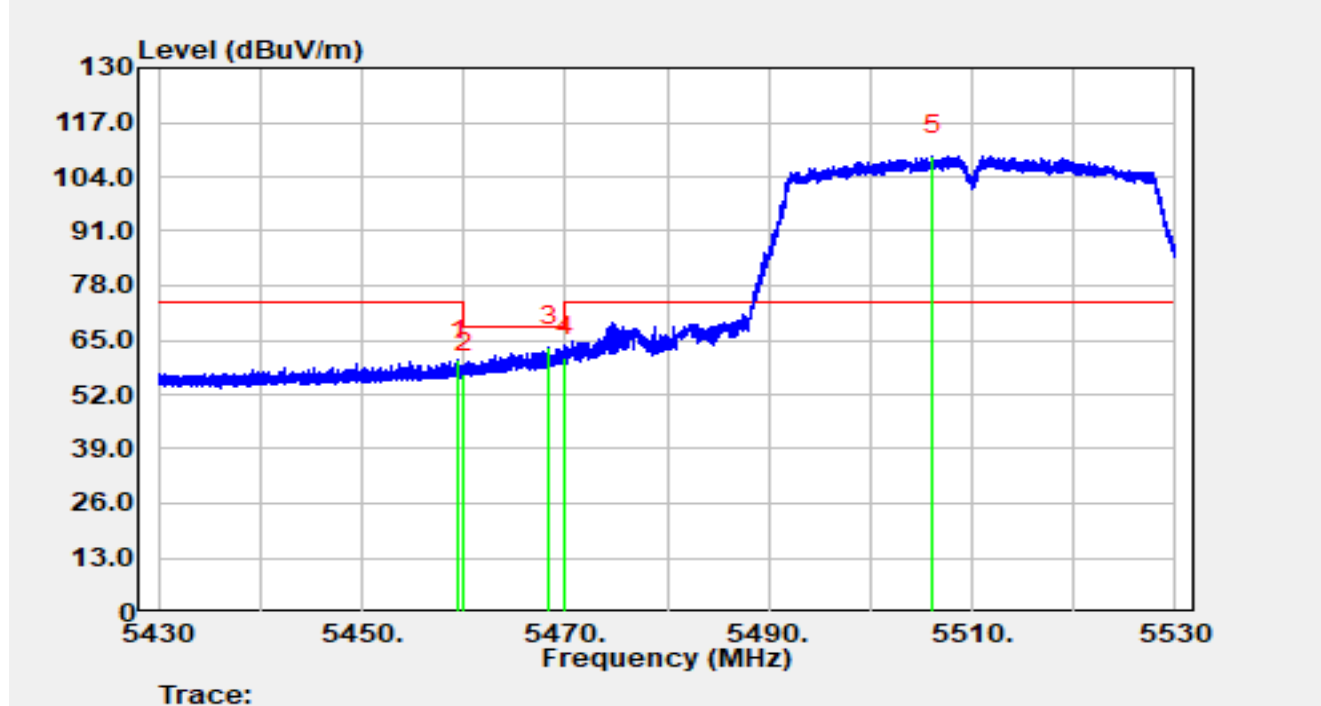


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.53	40.02	20.15	60.17	-13.83	74.00	Peak
2		5460.00	36.82	20.15	56.97	-11.23	68.20	Peak
3	*	5468.44	43.30	20.05	63.35	-4.85	68.20	Peak
4		5470.00	40.99	20.03	61.02	-7.18	68.20	Peak
5		5506.14	89.43	19.70	109.13	N/A	N/A	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5510MHz		

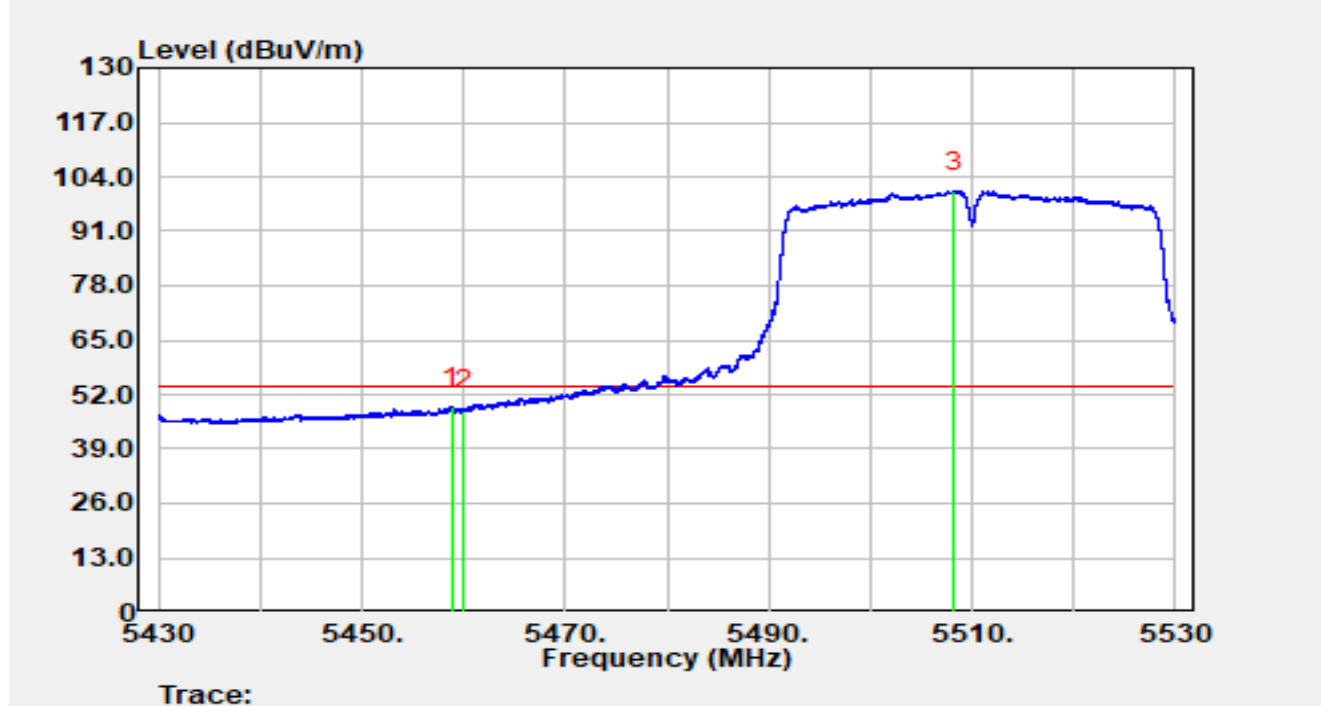


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.82	28.86	20.14	49.00	-5.00	54.00	Average
2		5460.00	28.12	20.15	48.26	-5.74	54.00	Average
3		5508.26	80.85	19.71	100.55	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5670MHz		

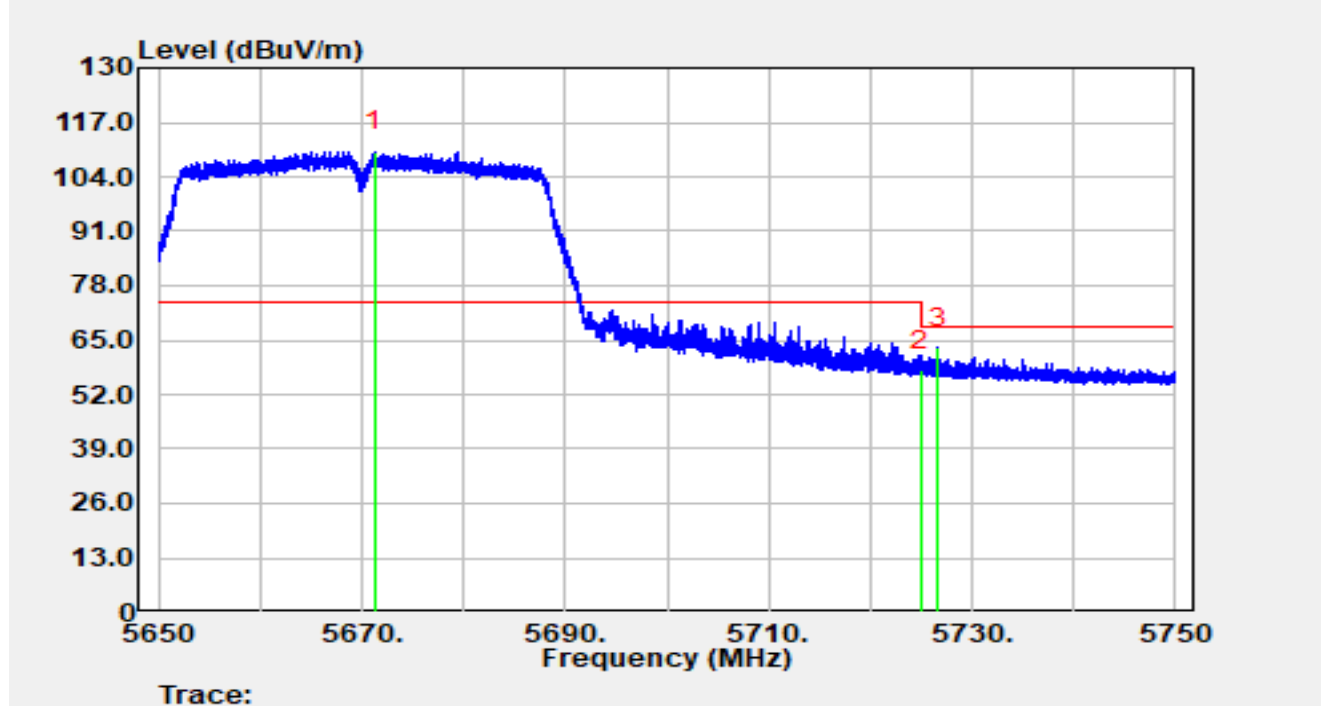


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5671.22	89.47	20.55	110.01	N/A	N/A	Peak
2		5725.00	36.45	21.34	57.79	-10.41	68.20	Peak
3	*	5726.62	41.72	21.33	63.06	-5.14	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5670MHz		

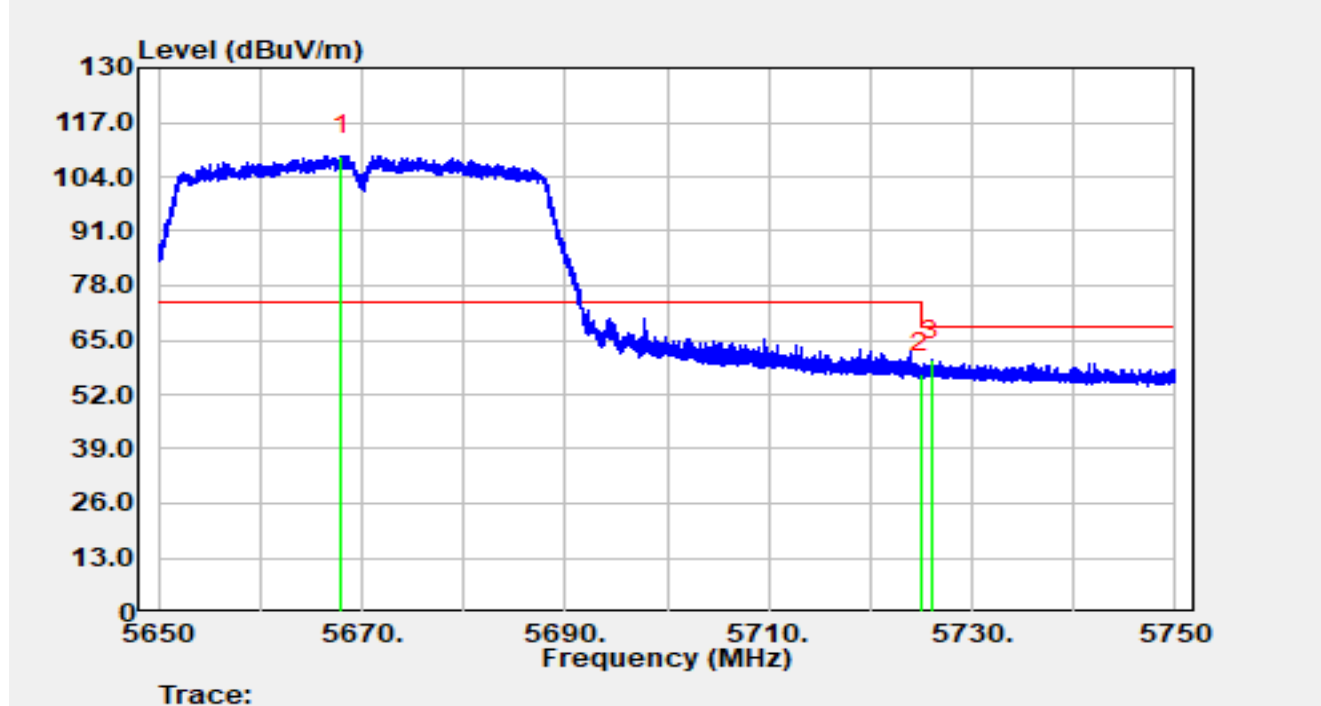


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5667.99	88.58	20.50	109.08	N/A	N/A	Peak
2		5725.00	35.79	21.34	57.13	-11.07	68.20	Peak
3	*	5725.98	38.99	21.34	60.32	-7.88	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5755MHz		

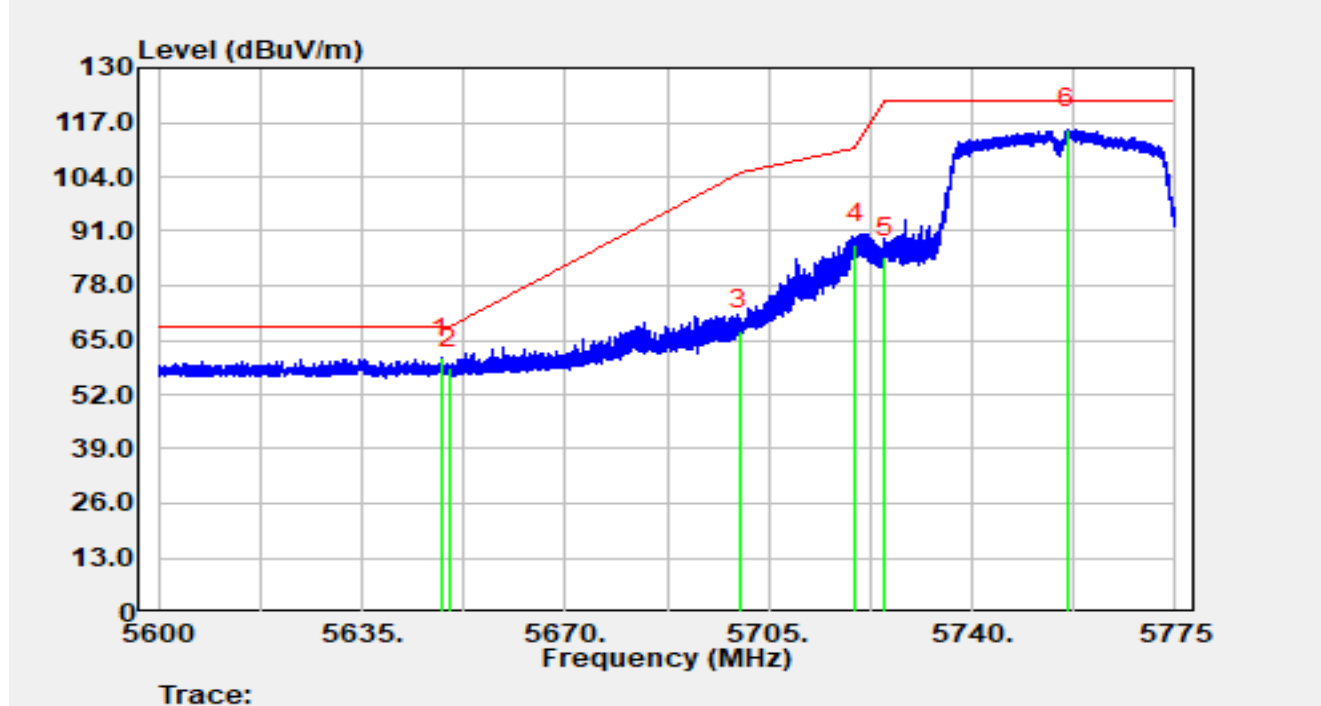


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.70	40.14	20.64	60.78	-7.42	68.20	Peak
2		5650.00	37.56	20.63	58.19	-10.01	68.20	Peak
3		5700.00	46.30	21.09	67.38	-37.82	105.20	Peak
4		5720.00	66.49	21.36	87.85	-22.95	110.80	Peak
5		5725.00	63.33	21.34	84.67	-37.53	122.20	Peak
6		5756.49	94.38	21.10	115.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-05
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5755MHz		

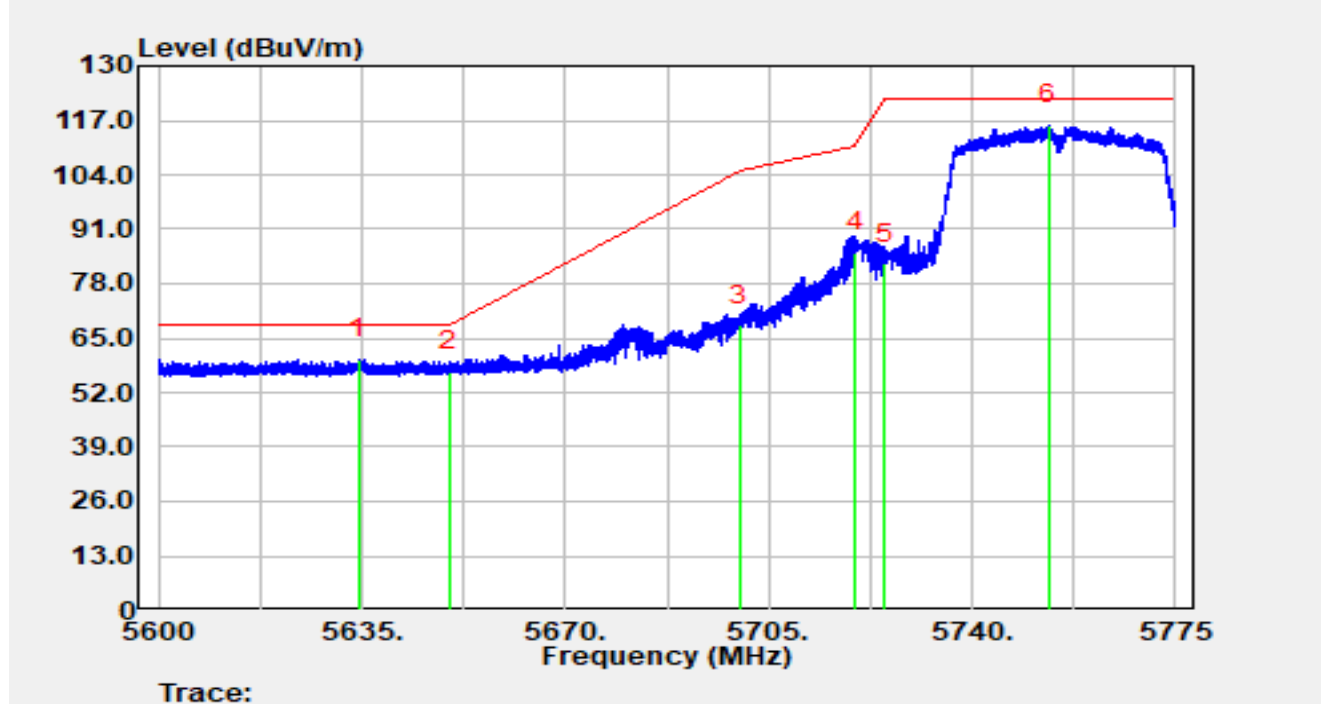


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5634.37	39.25	20.80	60.06	-8.14	68.20	Peak
2		5650.00	36.40	20.63	57.03	-11.17	68.20	Peak
3		5700.00	47.01	21.09	68.10	-37.10	105.20	Peak
4		5720.00	64.02	21.36	85.38	-25.42	110.80	Peak
5		5725.00	61.46	21.34	82.81	-39.39	122.20	Peak
6		5753.16	94.70	21.09	115.79	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5795MHz		

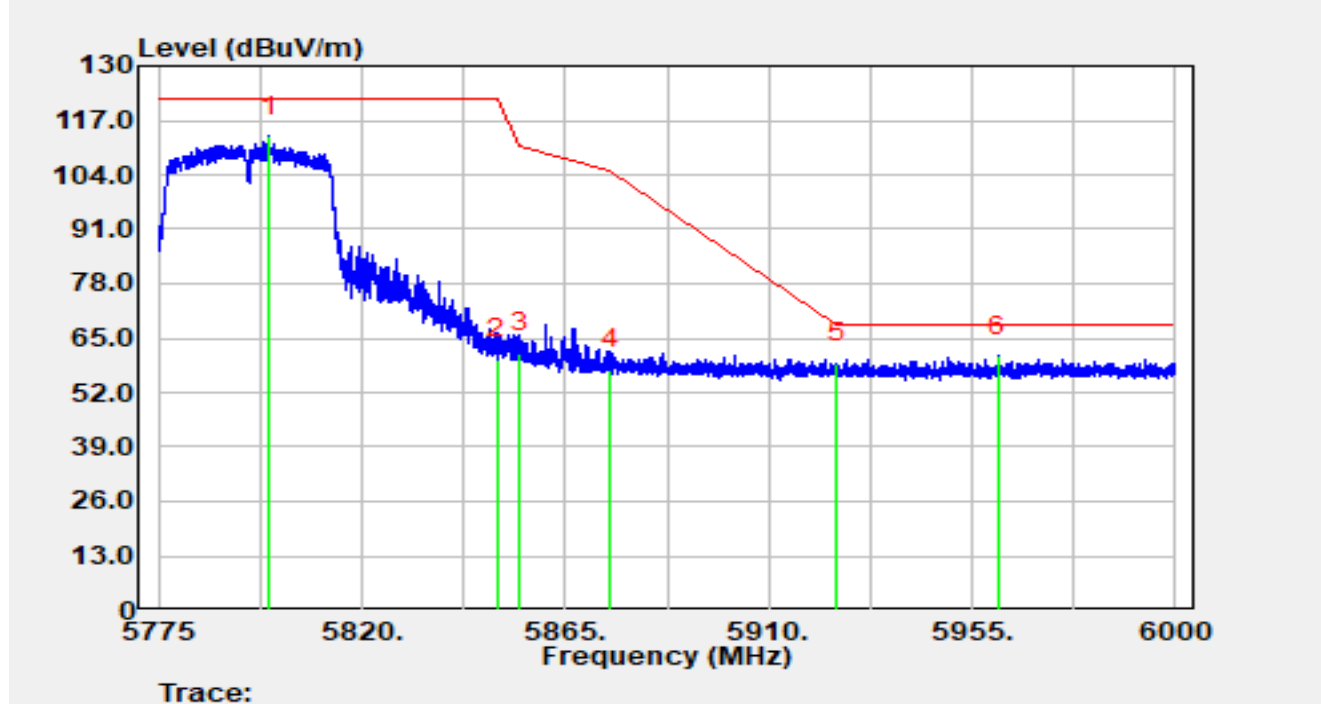


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.50	91.69	21.56	113.25	N/A	N/A	Peak
2		5850.00	38.67	21.33	60.01	-62.19	122.20	Peak
3		5855.00	40.13	21.33	61.45	-49.35	110.80	Peak
4		5875.00	36.01	21.59	57.60	-47.60	105.20	Peak
5		5925.00	37.49	21.49	58.98	-9.22	68.20	Peak
6	*	5960.83	39.05	21.74	60.78	-7.42	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT40 at 5795MHz		

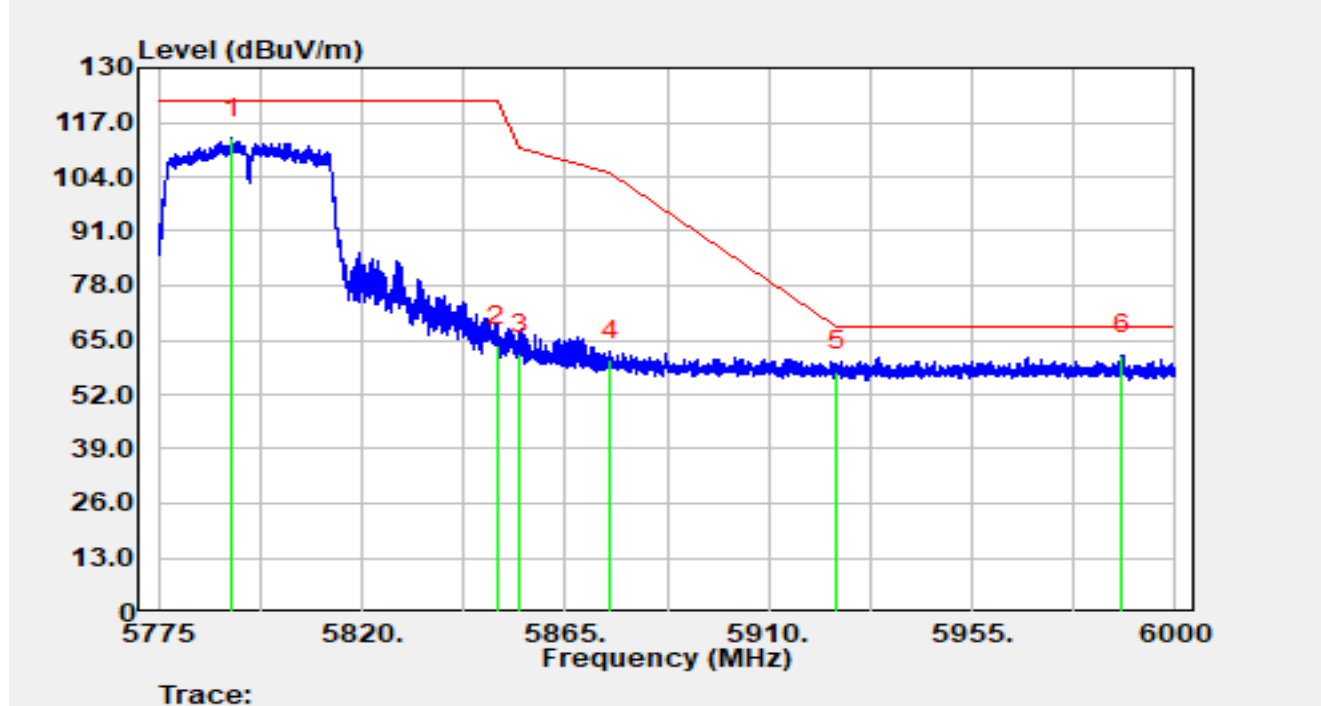


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.25	91.69	21.47	113.17	N/A	N/A	Peak
2		5850.00	42.38	21.33	63.72	-58.48	122.20	Peak
3		5855.00	40.32	21.33	61.64	-49.16	110.80	Peak
4		5875.00	38.64	21.59	60.23	-44.97	105.20	Peak
5		5925.00	36.12	21.49	57.61	-10.59	68.20	Peak
6	*	5988.28	39.43	21.94	61.37	-6.83	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5210MHz		

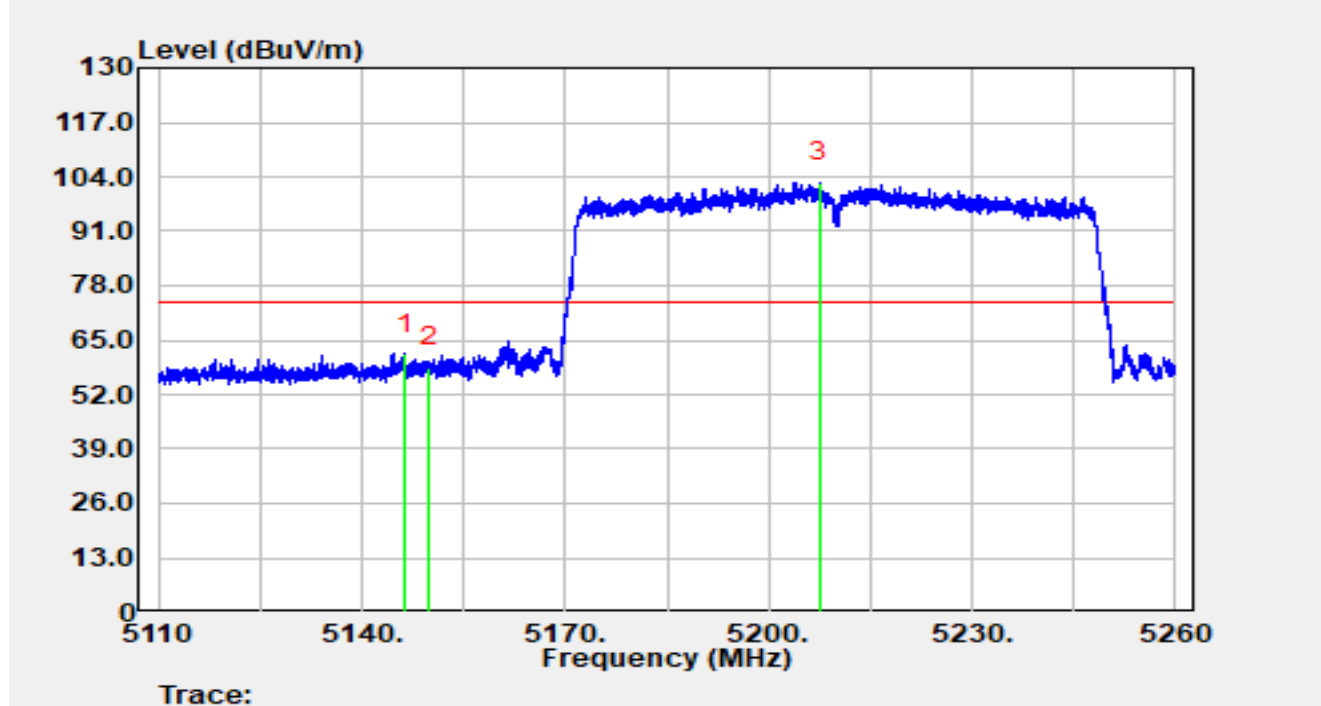


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.38	42.32	19.44	61.75	-12.25	74.00	Peak
2		5150.01	39.16	19.43	58.59	-15.41	74.00	Peak
3		5207.44	83.00	19.57	102.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5210MHz		

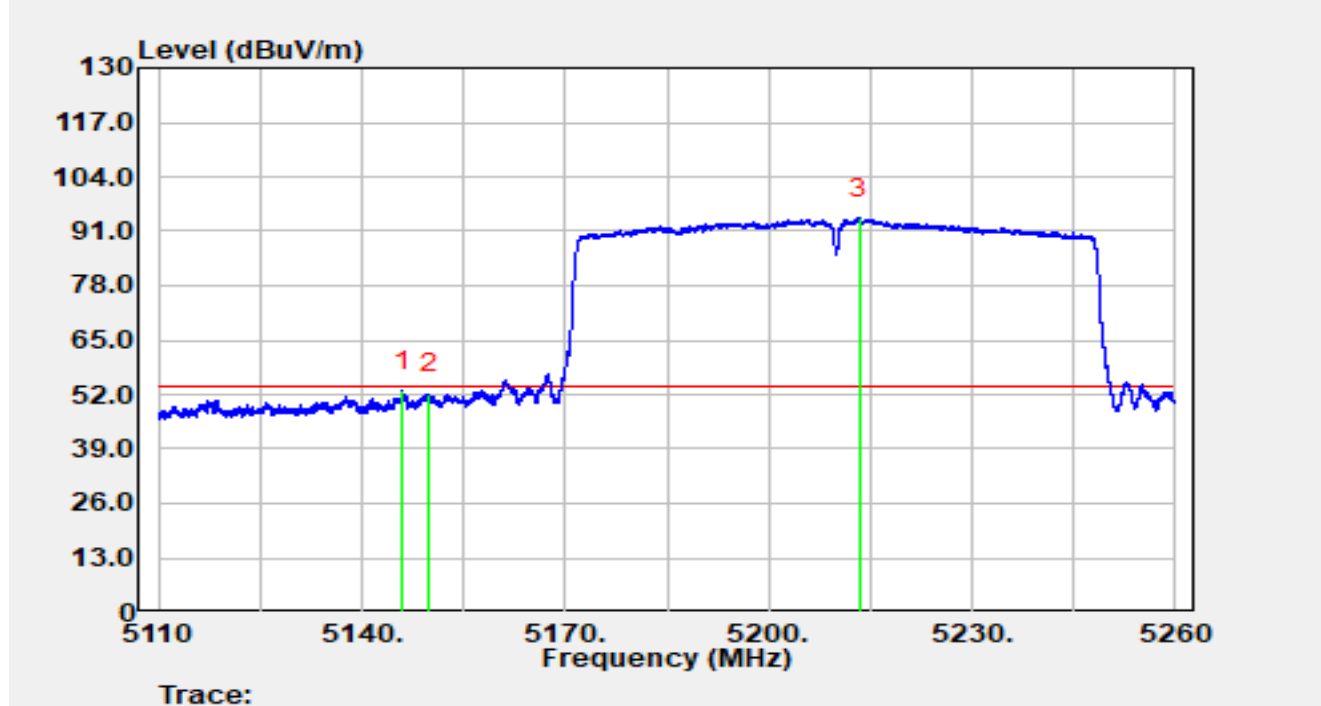


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.91	33.38	19.44	52.82	-1.18	54.00	Average
2		5150.00	32.72	19.43	52.15	-1.85	54.00	Average
3		5213.43	74.67	19.43	94.10	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5210MHz		

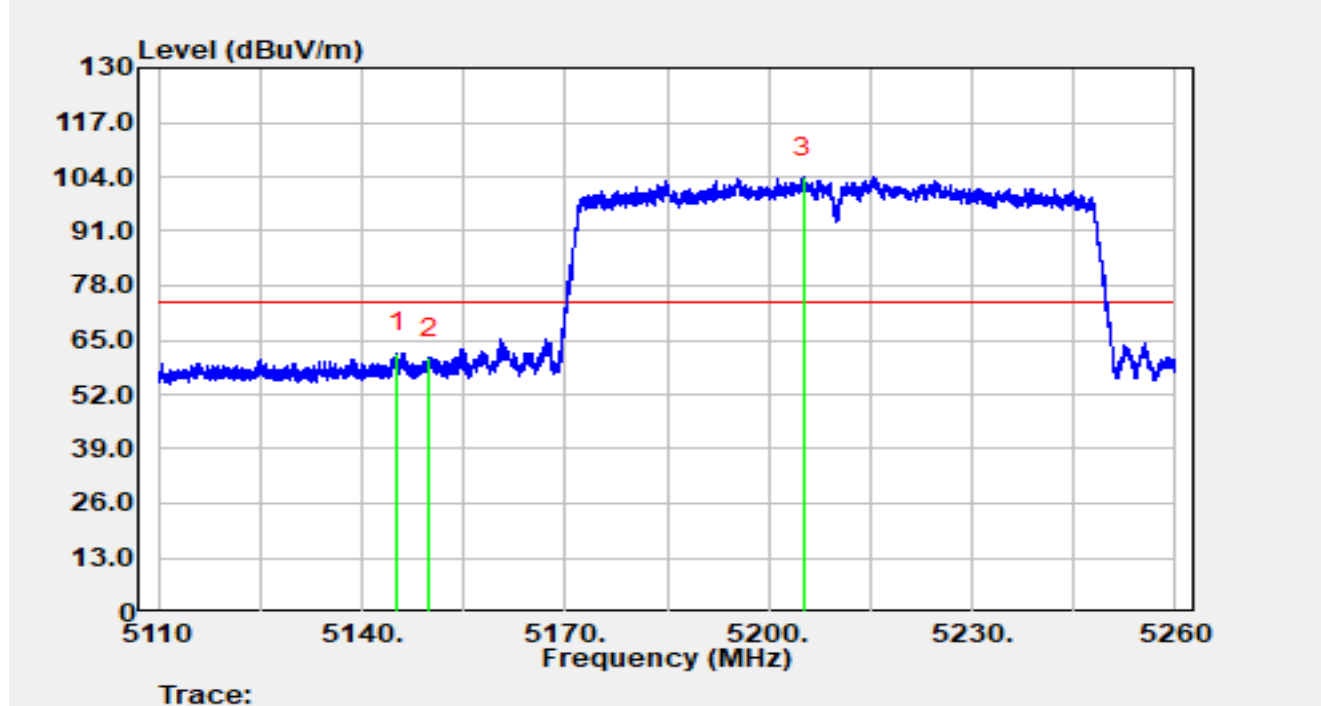


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.27	42.54	19.44	61.98	-12.02	74.00	Peak
2		5150.01	41.20	19.43	60.63	-13.37	74.00	Peak
3		5205.06	84.27	19.63	103.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5210MHz		

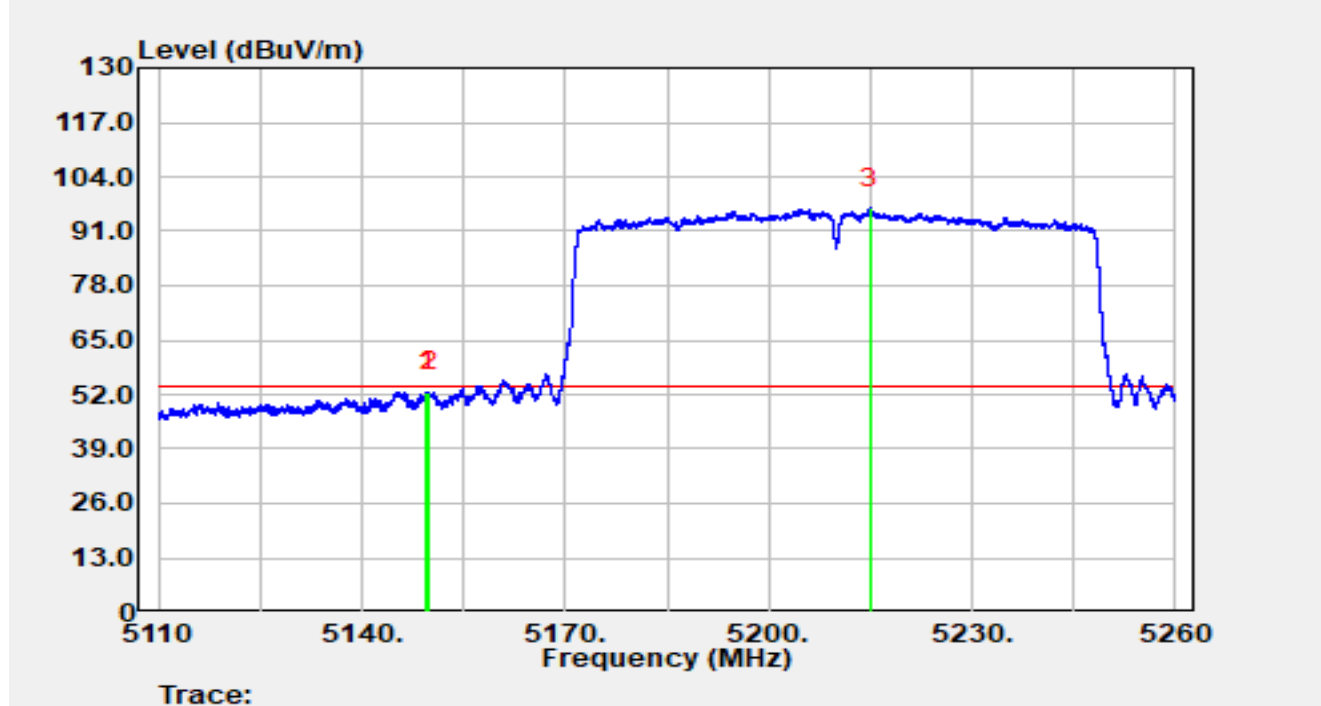


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.50	33.20	19.43	52.63	-1.37	54.00	Average
2		5150.00	33.20	19.43	52.63	-1.37	54.00	Average
3		5214.97	77.11	19.40	96.50	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5290MHz		

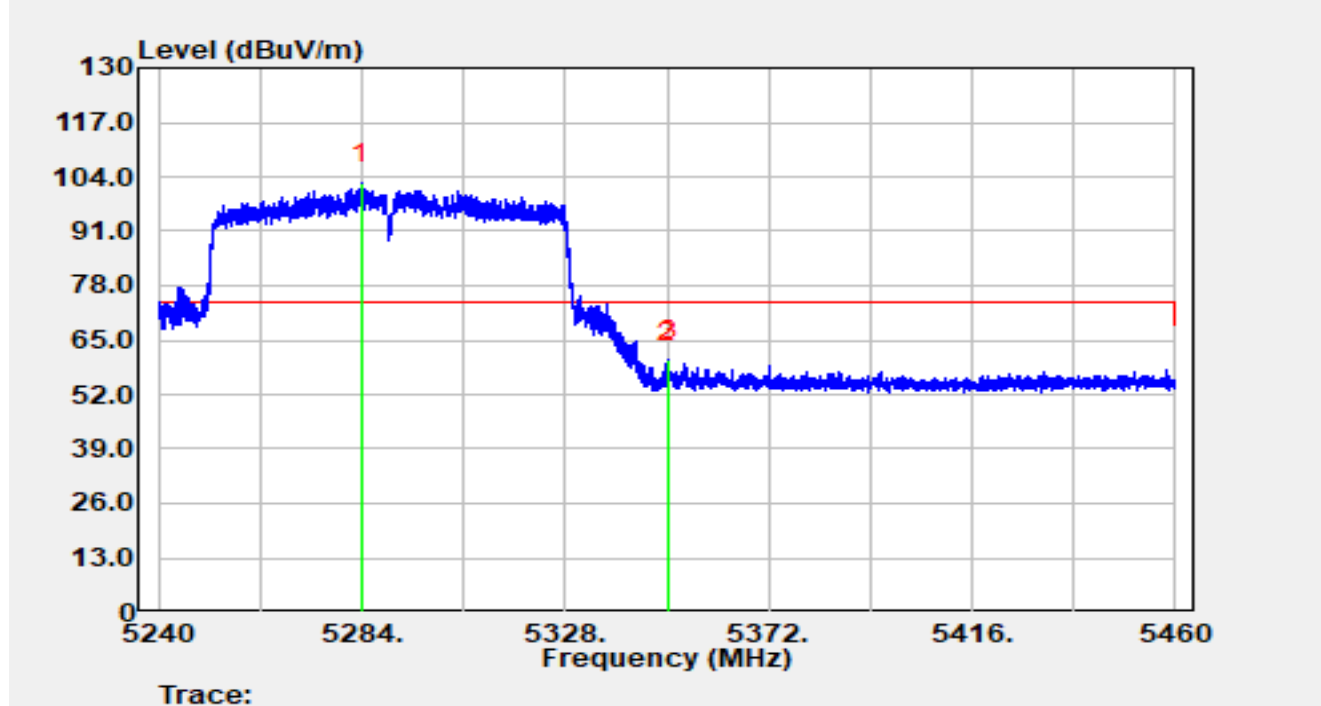


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5283.93	82.72	19.73	102.45	N/A	N/A	Peak
2		5350.00	39.82	19.85	59.67	-14.33	74.00	Peak
3	*	5350.46	40.39	19.86	60.25	-13.75	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5290MHz		

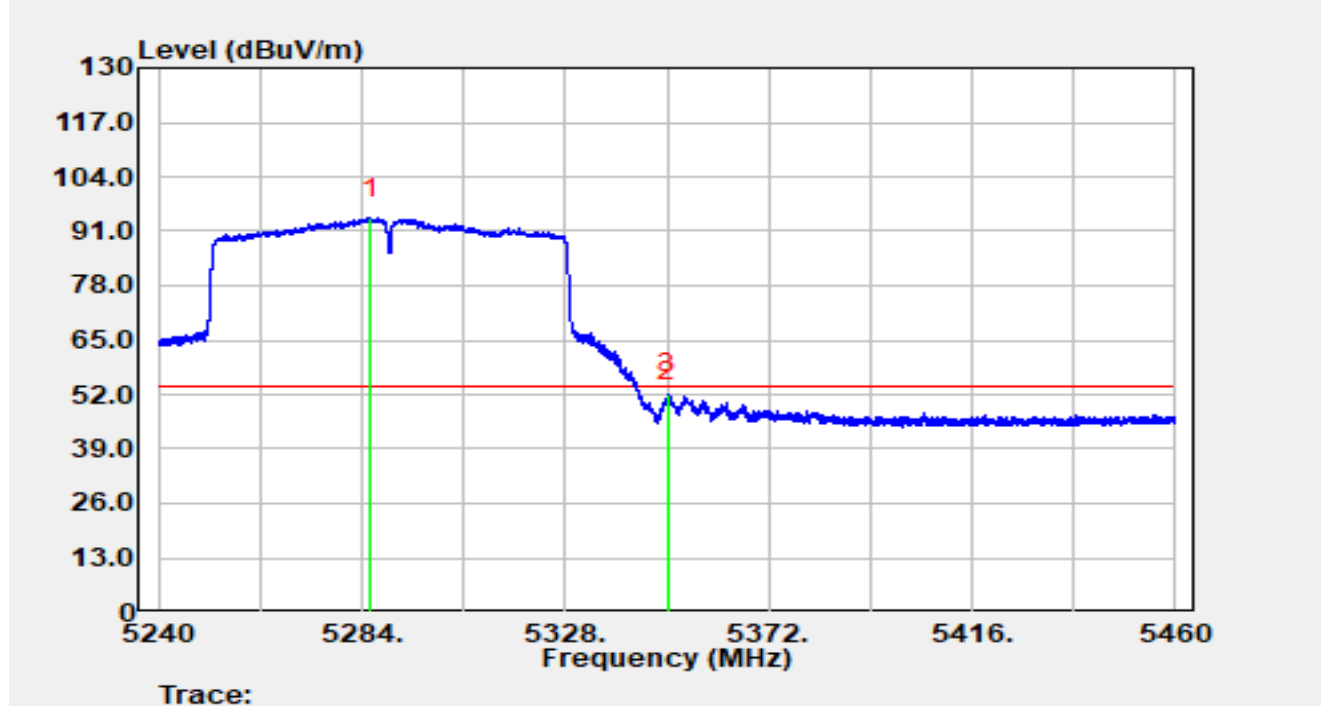


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5285.96	74.36	19.74	94.09	N/A	N/A	Average
2		5350.00	30.45	19.85	50.31	-3.69	54.00	Average
3	*	5350.20	32.31	19.85	52.16	-1.84	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5290MHz		

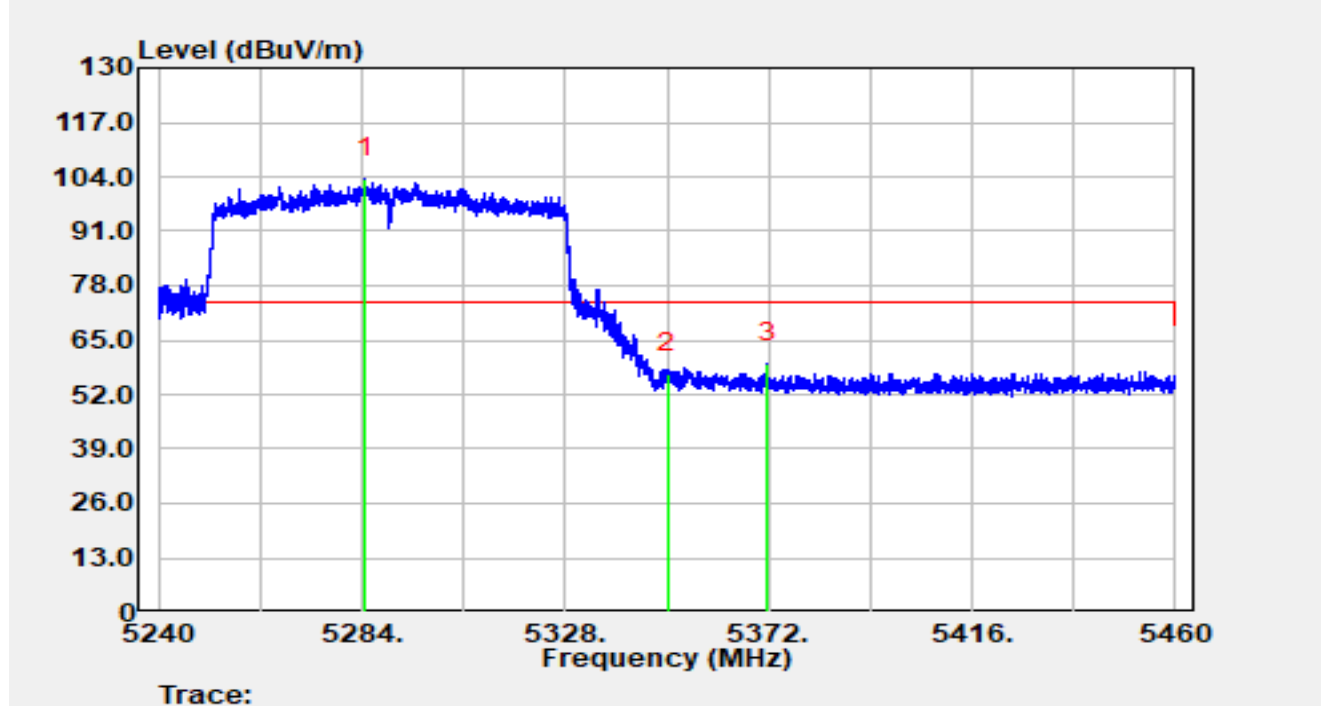


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5284.66	83.86	19.73	103.60	N/A	N/A	Peak
2		5350.00	37.18	19.85	57.03	-16.97	74.00	Peak
3	*	5371.63	39.45	19.91	59.37	-14.63	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5290MHz		

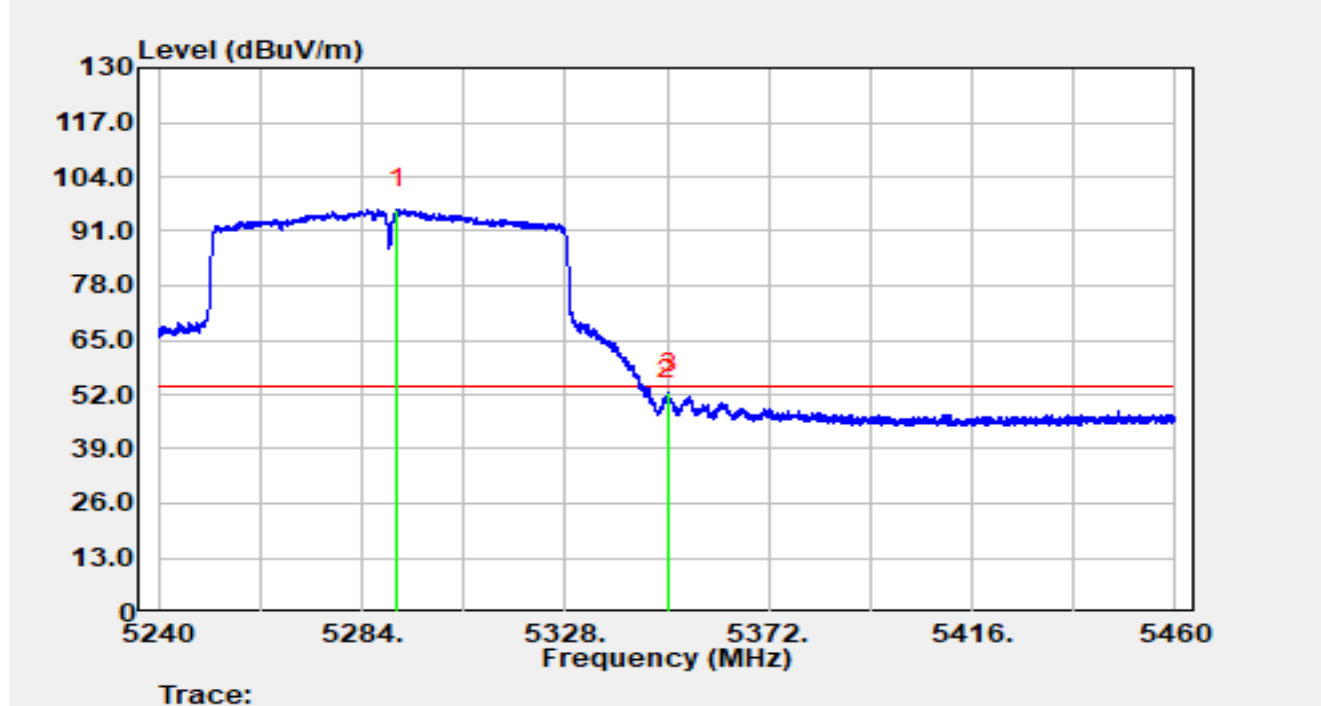


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5291.79	76.48	19.71	96.20	N/A	N/A	Average
2		5350.00	30.75	19.85	50.60	-3.40	54.00	Average
3	*	5350.42	32.46	19.85	52.32	-1.68	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5530MHz		

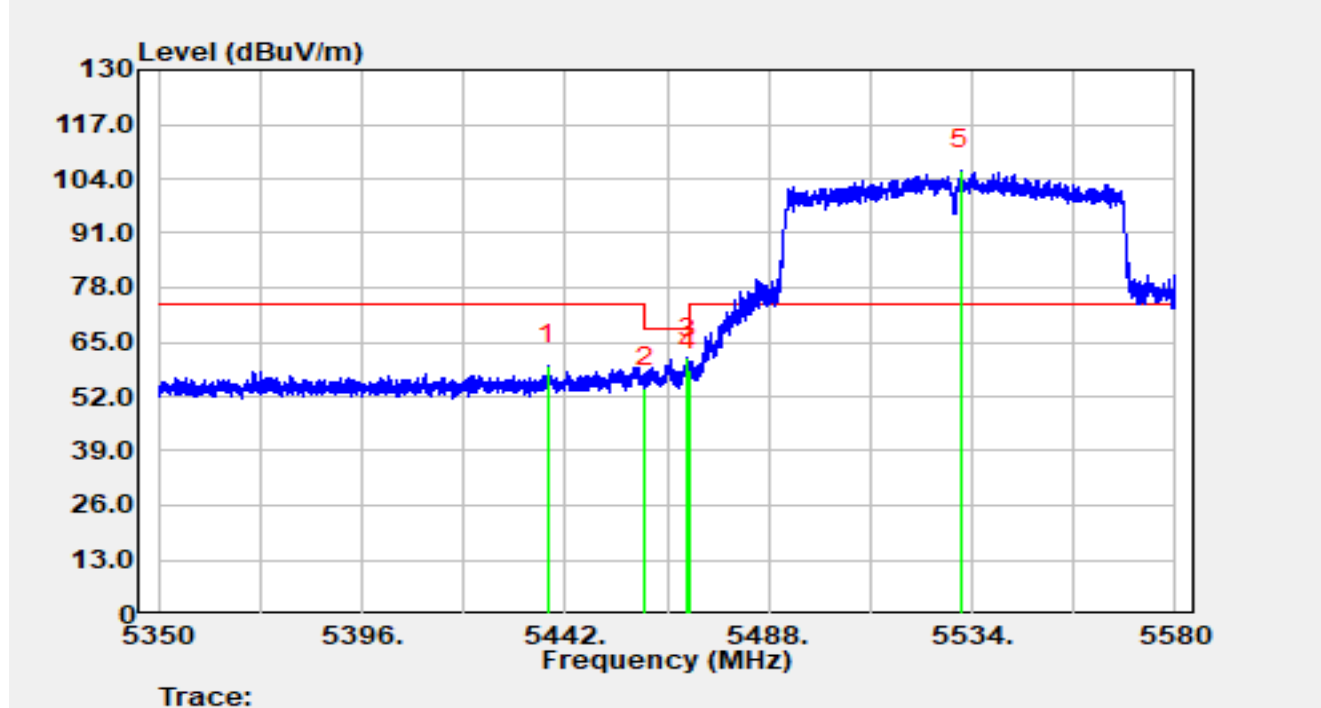


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5438.14	39.46	20.01	59.47	-14.53	74.00	Peak
2		5460.00	33.95	20.15	54.09	-14.11	68.20	Peak
3	*	5469.55	41.18	20.04	61.22	-6.98	68.20	Peak
4		5470.00	38.28	20.03	58.32	-9.88	68.20	Peak
5		5531.49	85.88	20.15	106.03	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5530MHz		

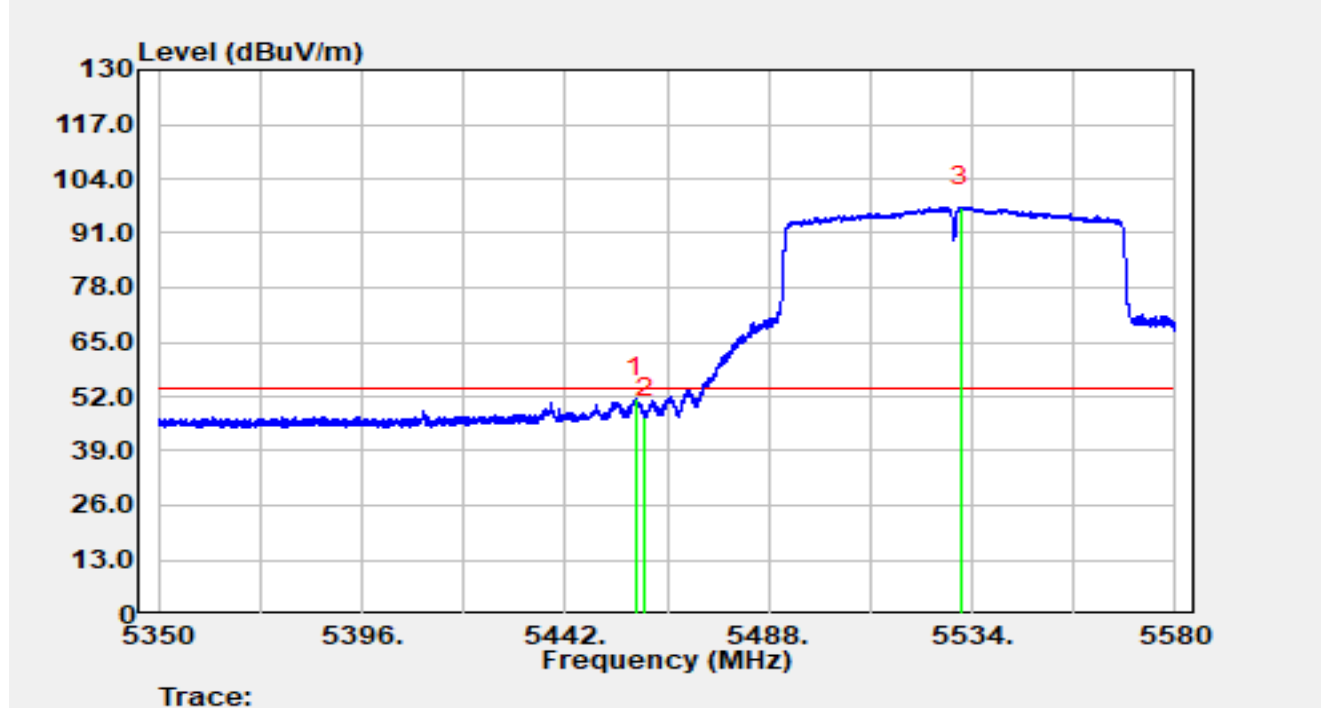


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.80	31.37	20.14	51.51	-2.49	54.00	Average
2		5460.00	26.72	20.15	46.87	-7.13	54.00	Average
3		5531.29	77.21	20.15	97.36	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5530MHz		

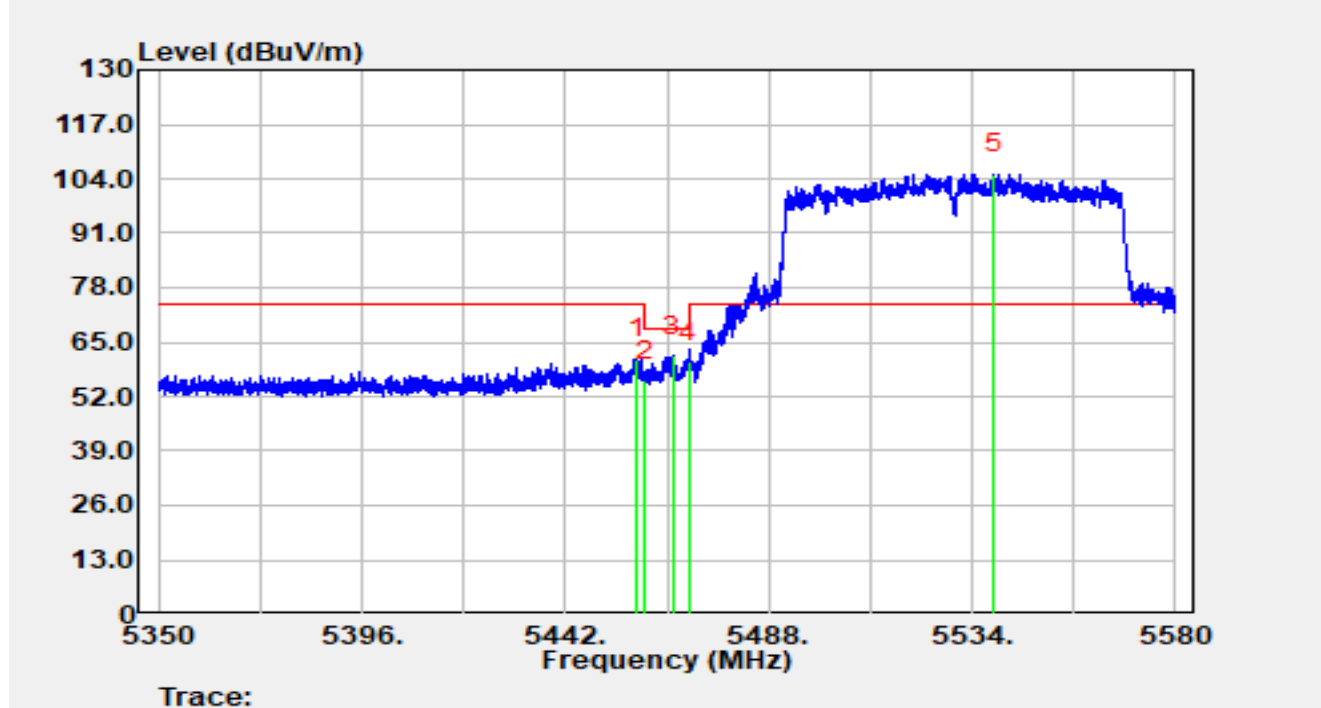


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.24	40.91	20.14	61.05	-12.95	74.00	Peak
2		5460.00	35.65	20.15	55.79	-12.41	68.20	Peak
3	*	5466.31	41.71	20.08	61.79	-6.41	68.20	Peak
4		5470.00	40.30	20.03	60.33	-7.87	68.20	Peak
5		5539.01	84.98	20.24	105.21	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5530MHz		

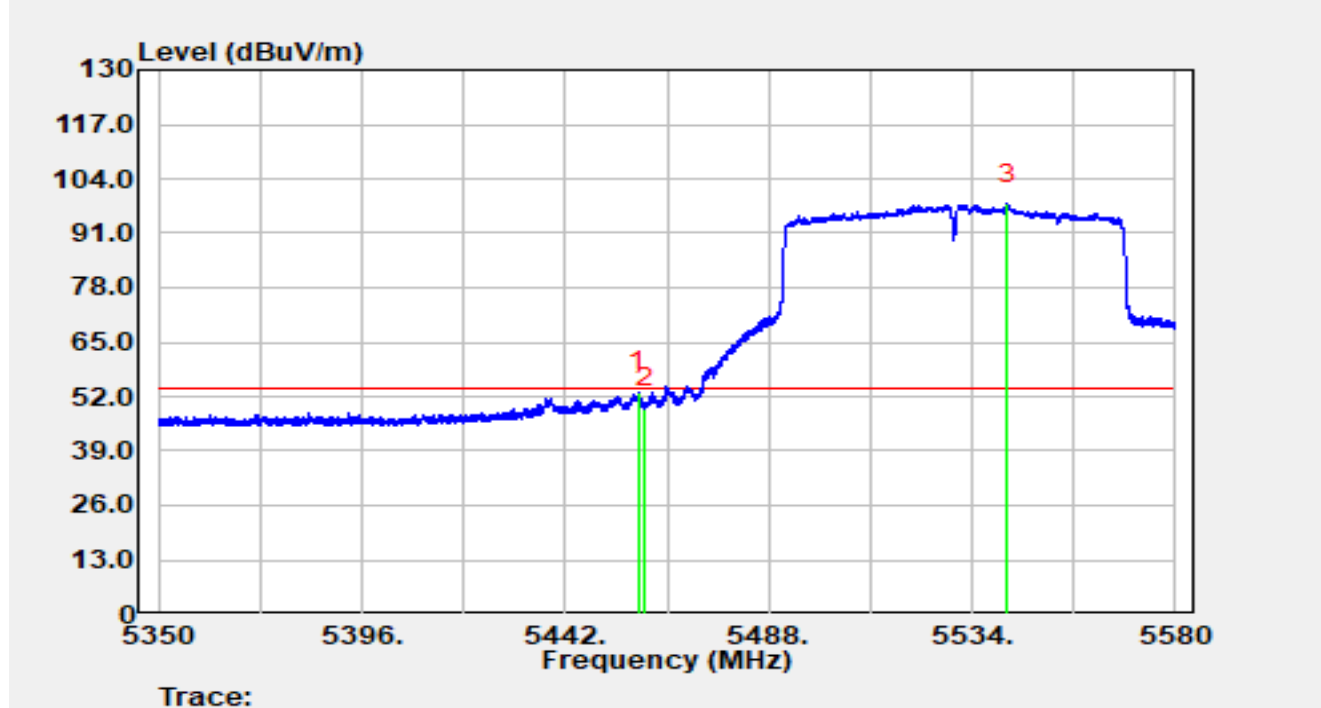


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.65	32.87	20.14	53.02	-0.98	54.00	Average
2		5460.00	29.15	20.15	49.30	-4.70	54.00	Average
3		5541.98	77.71	20.27	97.98	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5610MHz		

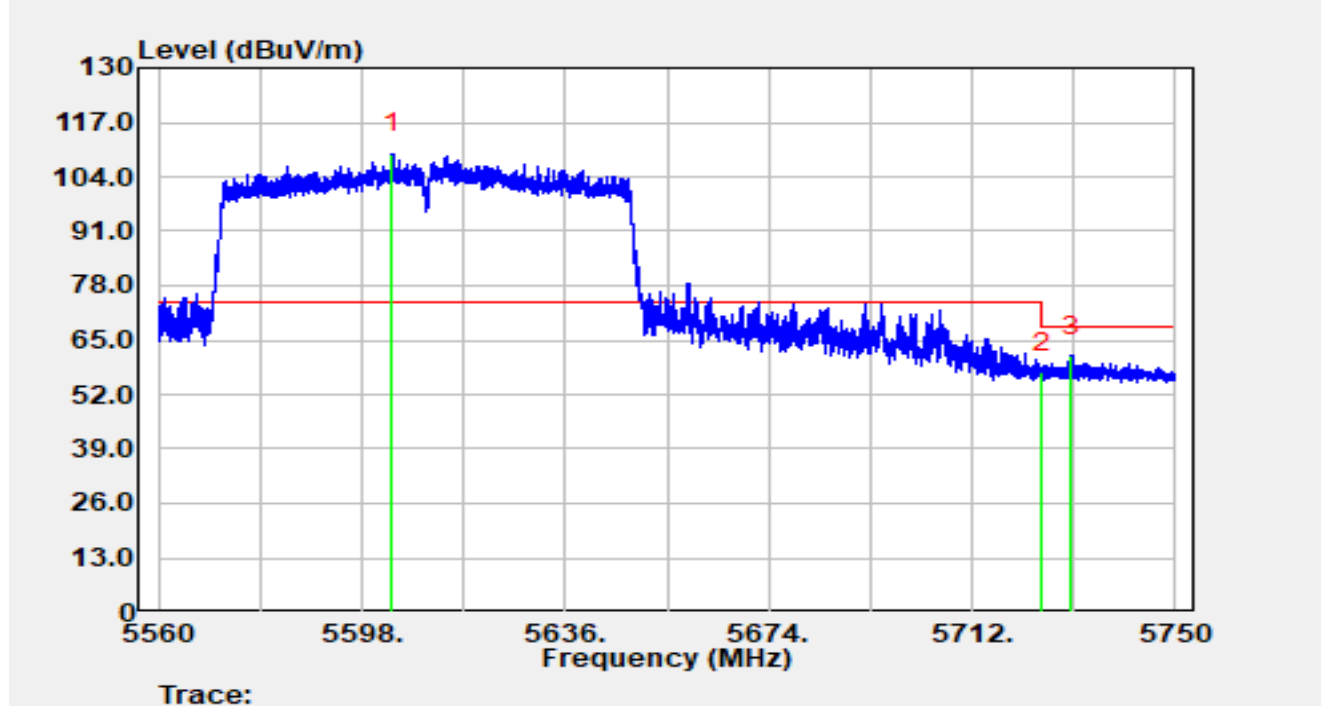


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5603.72	89.14	20.41	109.55	N/A	N/A	Peak
2		5725.00	36.03	21.34	57.37	-16.63	74.00	Peak
3	*	5730.56	39.92	21.31	61.24	-6.96	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5610MHz		

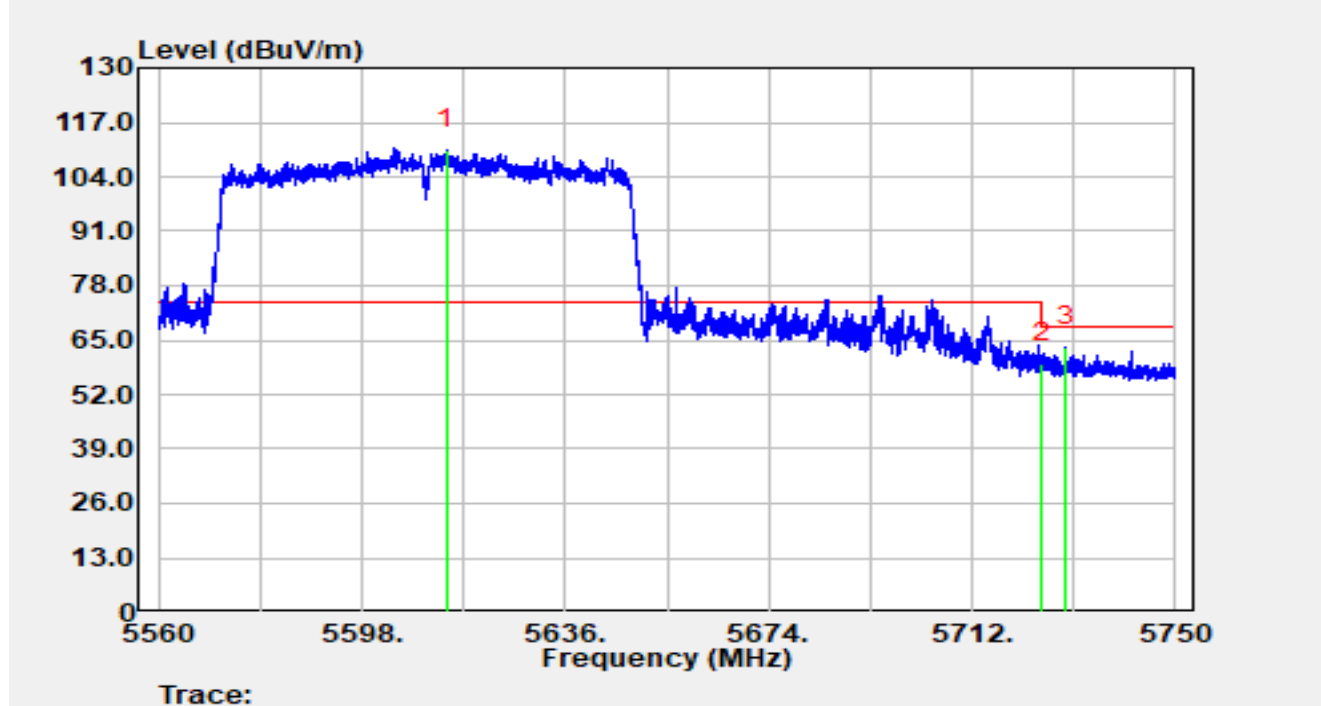


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5613.73	89.84	20.65	110.49	N/A	N/A	Peak
2		5725.00	38.09	21.34	59.43	-8.77	68.20	Peak
3	*	5729.58	41.99	21.32	63.31	-4.89	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5775MHz		

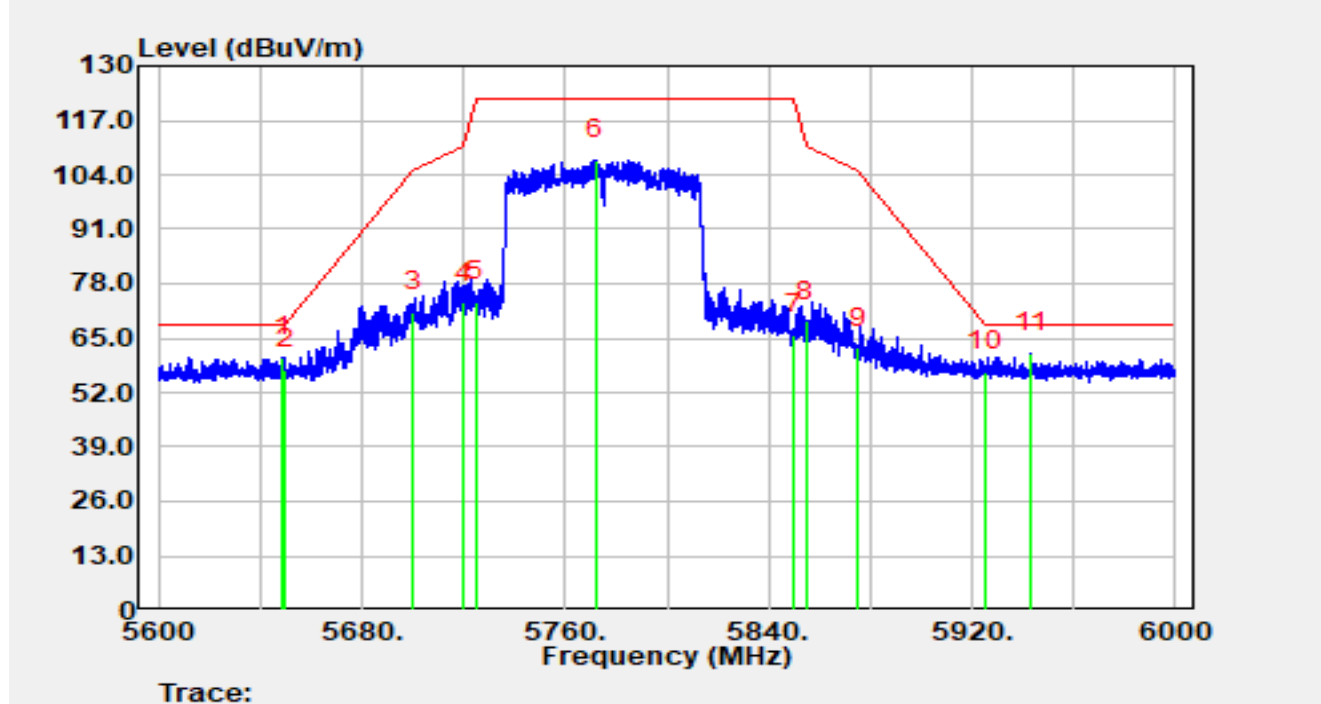

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5649.08	39.90	20.64	60.54	-7.66	68.20	Peak
2		5650.00	36.83	20.63	57.46	-10.74	68.20	Peak
3		5700.00	50.15	21.09	71.24	-33.96	105.20	Peak
4		5720.00	52.16	21.36	73.52	-37.28	110.80	Peak
5		5725.00	52.40	21.34	73.74	-48.46	122.20	Peak
6		5771.72	86.36	21.17	107.53	N/A	N/A	Peak
7		5850.00	44.58	21.33	65.92	-56.28	122.20	Peak
8		5855.00	47.61	21.33	68.93	-41.87	110.80	Peak
9		5875.00	41.01	21.59	62.61	-42.59	105.20	Peak
10		5925.00	35.64	21.49	57.14	-11.06	68.20	Peak
11	*	5943.40	39.92	21.46	61.38	-6.82	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

4.The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT80 at 5775MHz		

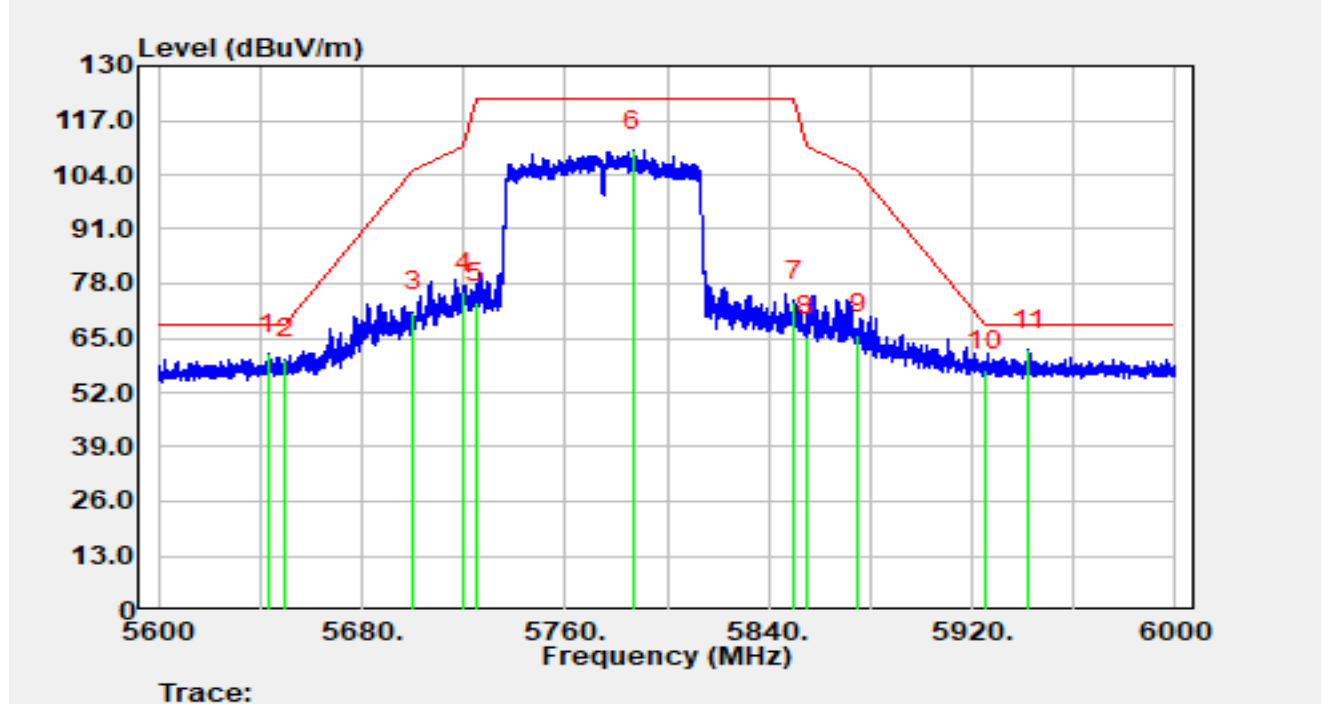

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5643.08	40.44	20.71	61.15	-7.05	68.20	Peak
2		5650.00	39.44	20.63	60.07	-8.13	68.20	Peak
3		5700.00	50.05	21.09	71.14	-34.06	105.20	Peak
4		5720.00	54.62	21.36	75.98	-34.82	110.80	Peak
5		5725.00	52.23	21.34	73.57	-48.63	122.20	Peak
6		5786.60	88.38	21.41	109.80	N/A	N/A	Peak
7		5850.00	52.40	21.33	73.73	-48.47	122.20	Peak
8		5855.00	44.00	21.33	65.33	-45.47	110.80	Peak
9		5875.00	44.31	21.59	65.91	-39.29	105.20	Peak
10		5925.00	35.78	21.49	57.28	-10.92	68.20	Peak
11	*	5942.44	40.82	21.45	62.27	-5.93	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

4.The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

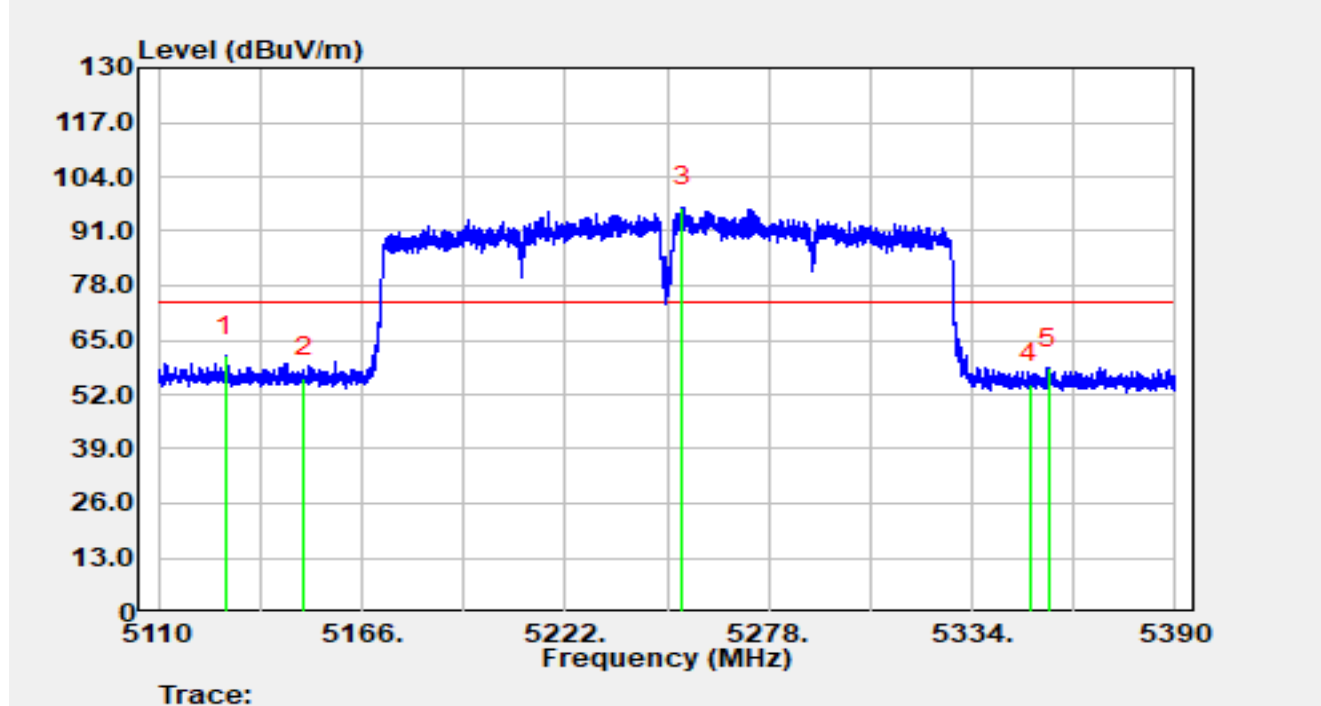


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5128.40	41.62	19.56	61.18	-12.82	74.00	Peak
2		5150.00	36.63	19.43	56.06	-17.94	74.00	Peak
3		5254.28	77.28	19.40	96.67	N/A	N/A	Peak
4		5350.00	34.67	19.85	54.52	-19.48	74.00	Peak
5		5354.92	38.33	19.89	58.22	-15.78	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

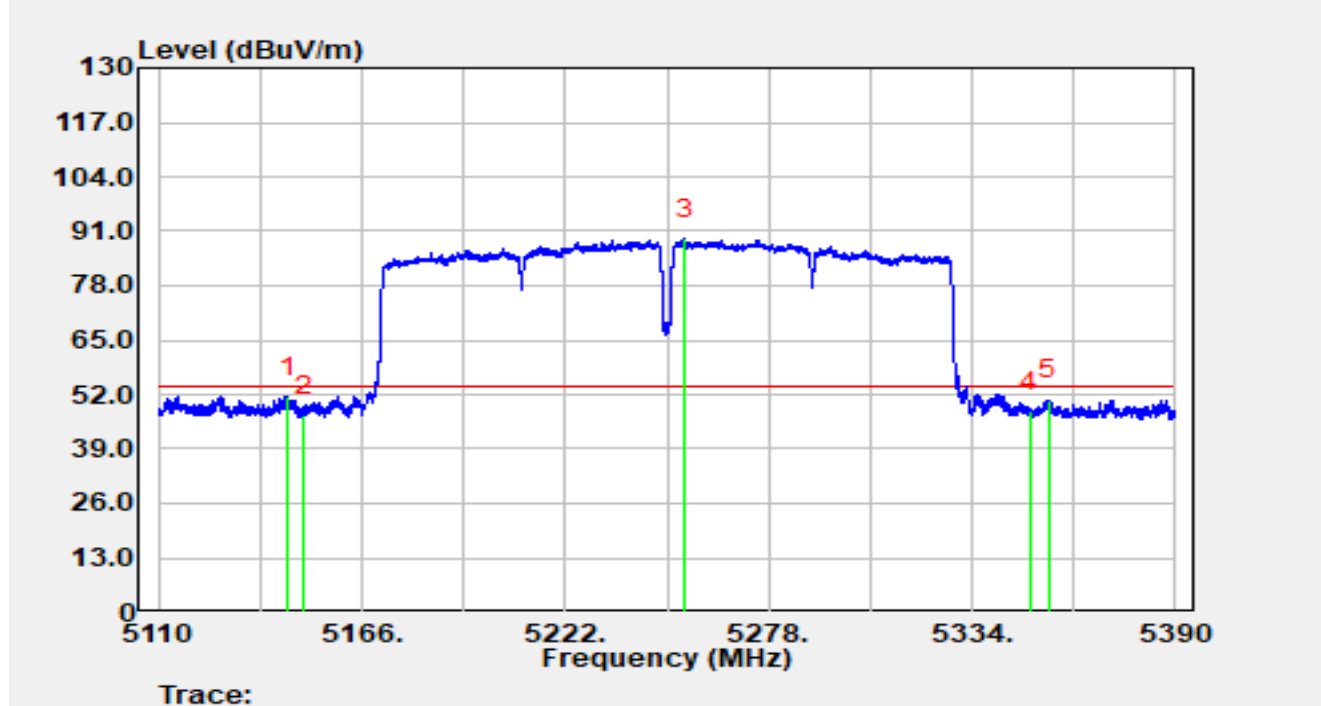


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.59	32.01	19.44	51.45	-2.55	54.00	Average
2		5150.00	27.61	19.43	47.04	-6.96	54.00	Average
3		5254.96	69.87	19.41	89.28	N/A	N/A	Average
4		5350.00	28.01	19.85	47.86	-6.14	54.00	Average
5		5354.92	30.70	19.89	50.59	-3.41	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

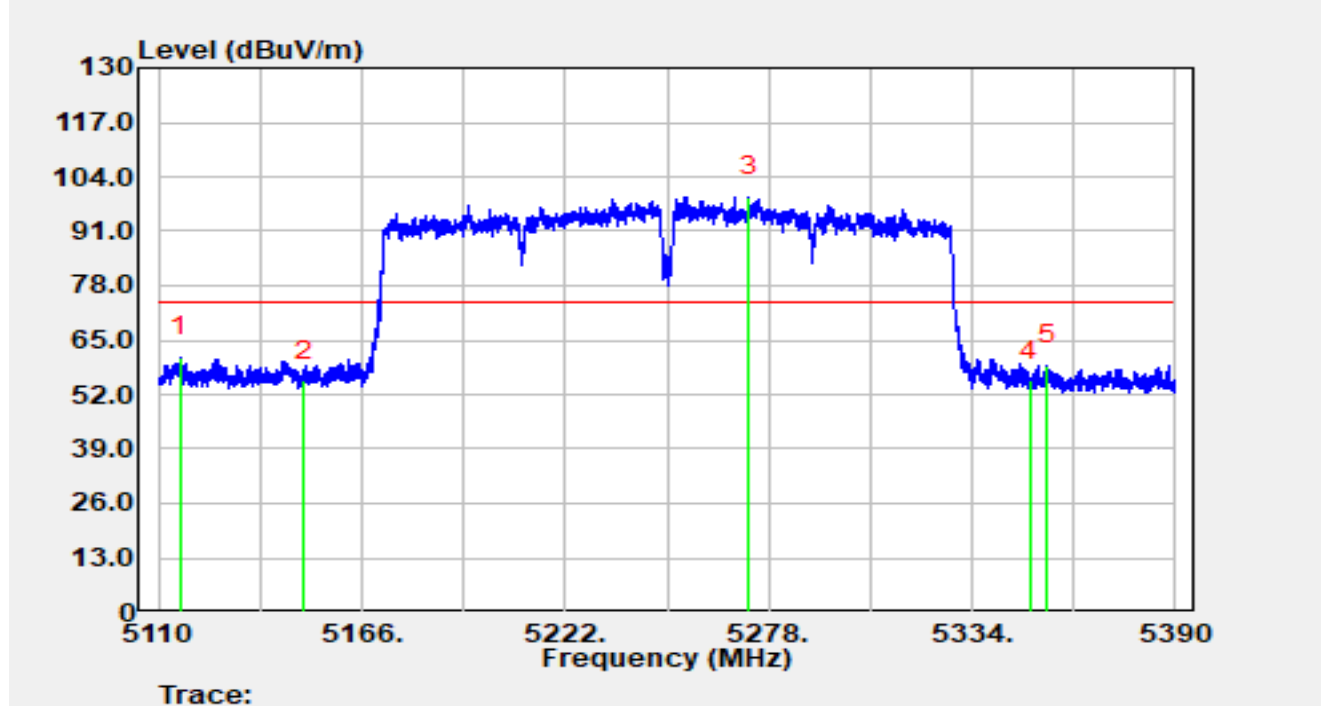


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5115.82	41.08	19.76	60.84	-13.16	74.00	Peak
2		5150.01	35.82	19.43	55.25	-18.75	74.00	Peak
3		5272.65	79.61	19.70	99.32	N/A	N/A	Peak
4		5350.00	35.44	19.85	55.29	-18.71	74.00	Peak
5		5354.80	39.09	19.89	58.98	-15.02	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5250MHz		

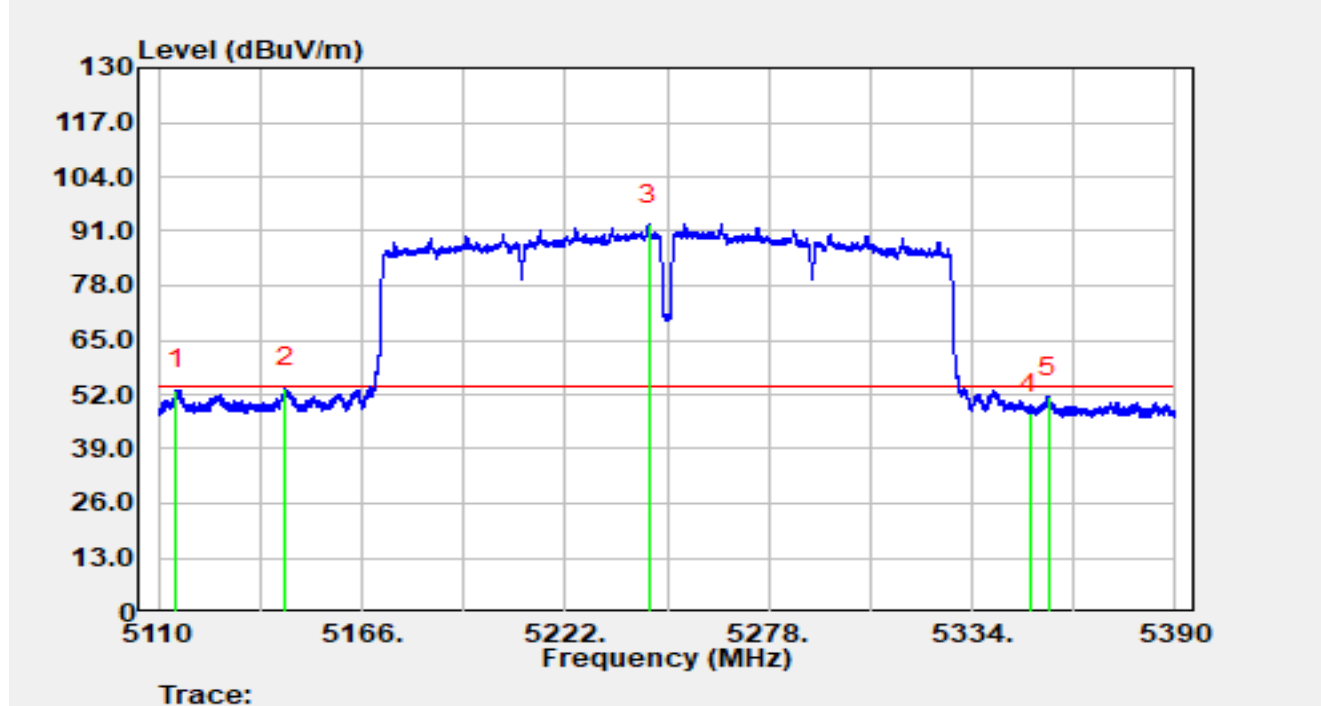


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5114.82	33.27	19.77	53.04	-0.96	54.00	Average
2	*	5144.86	34.09	19.44	53.53	-0.47	54.00	Average
3		5245.04	73.46	19.24	92.69	N/A	N/A	Average
4		5349.99	27.60	19.85	47.45	-6.55	54.00	Average
5		5354.94	31.59	19.89	51.48	-2.52	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

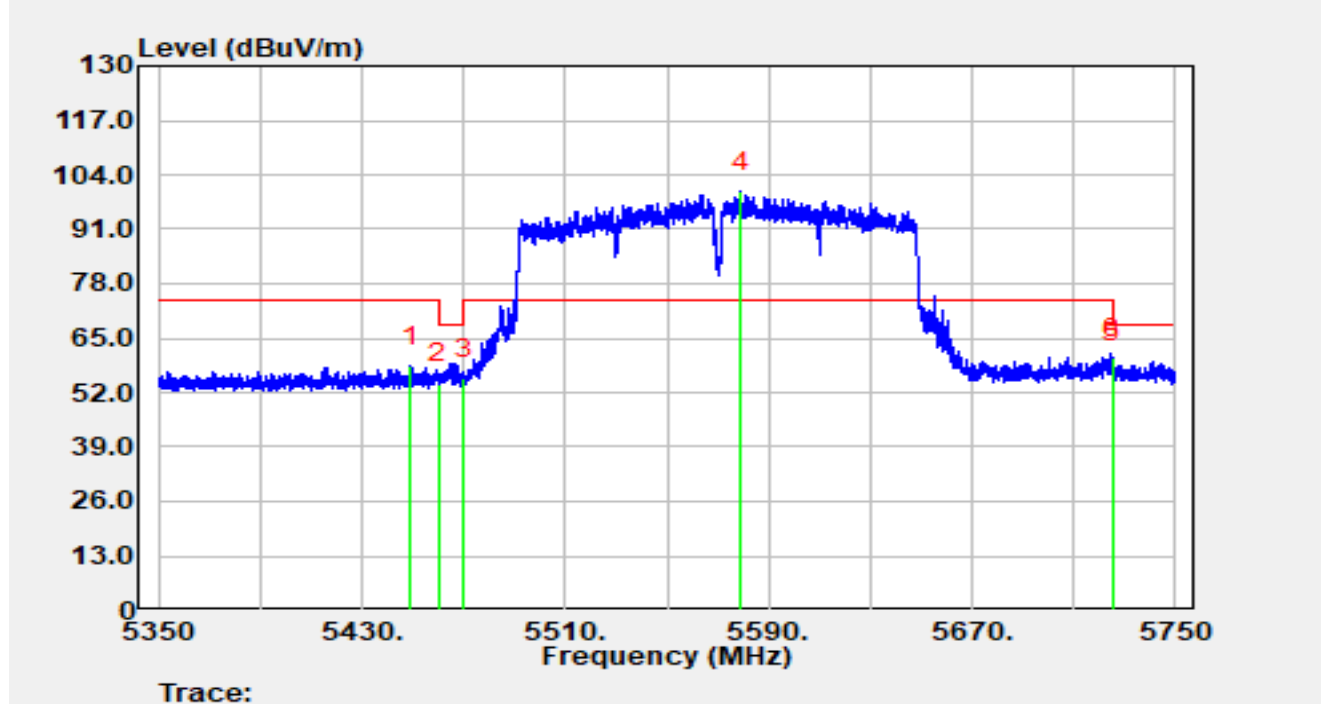


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.92	38.12	20.11	58.23	-15.77	74.00	Peak
2		5460.00	33.99	20.15	54.14	-14.06	68.20	Peak
3		5470.00	35.17	20.03	55.20	-13.00	68.20	Peak
4		5579.08	79.77	20.09	99.86	N/A	N/A	Peak
5		5725.00	37.97	21.34	59.31	-8.89	68.20	Peak
6	*	5725.12	38.80	21.34	60.14	-8.06	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (4) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

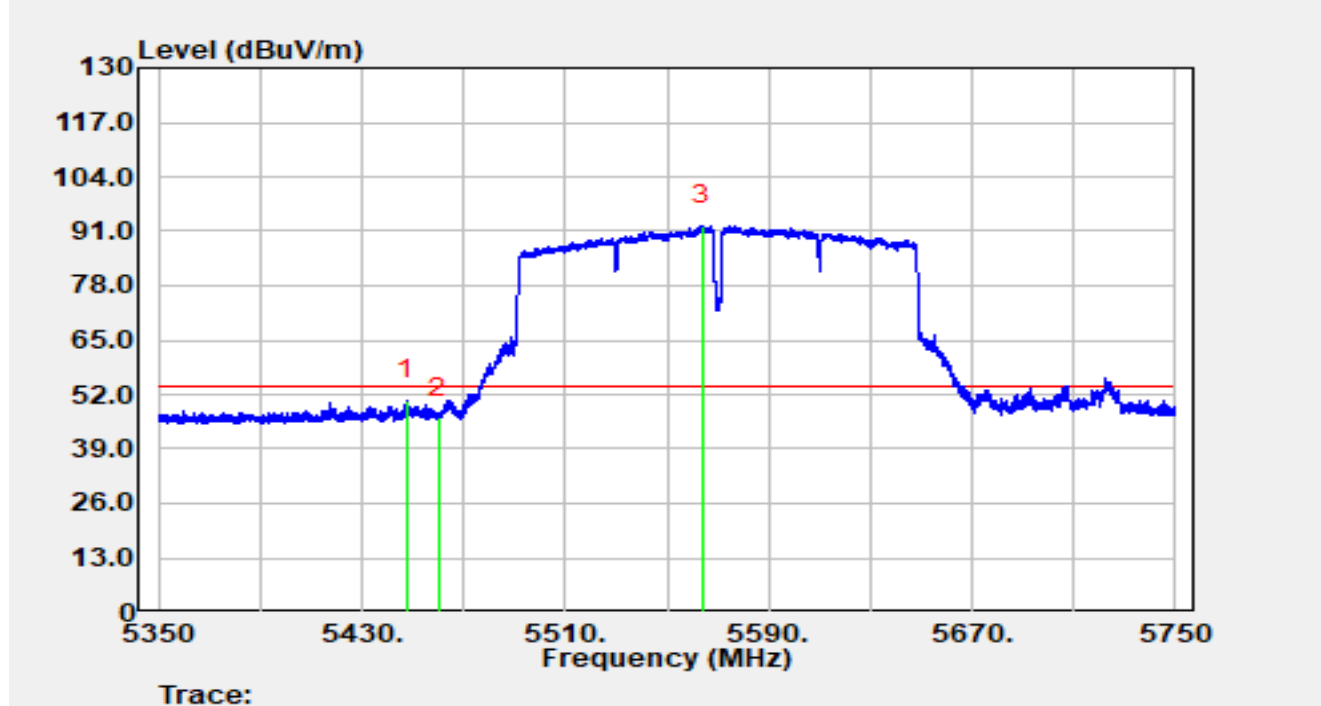


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.48	30.66	20.11	50.76	-3.24	54.00	Average
2		5460.00	26.32	20.15	46.47	-7.53	54.00	Average
3		5563.80	72.10	20.16	92.26	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

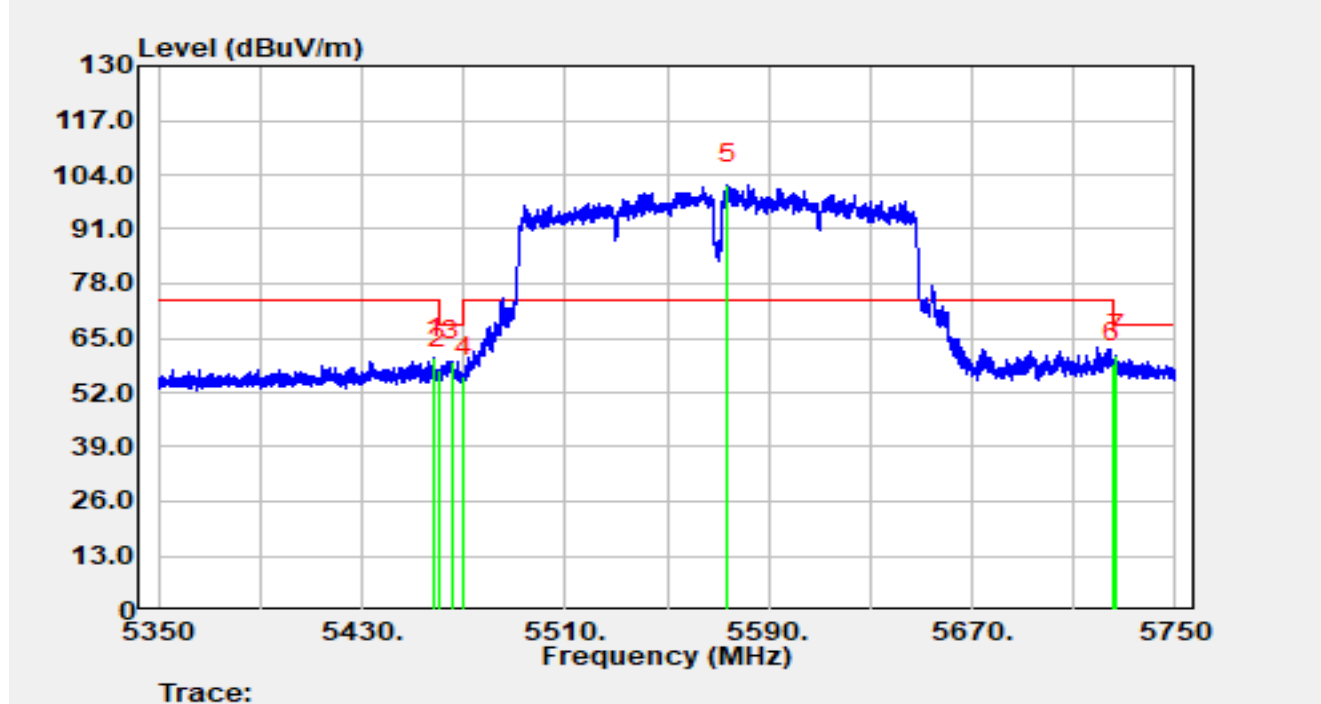


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.68	40.06	20.14	60.20	-13.80	74.00	Peak
2		5460.00	37.28	20.15	57.43	-10.77	68.20	Peak
3		5465.16	39.41	20.10	59.50	-8.70	68.20	Peak
4		5470.00	35.80	20.03	55.84	-12.36	68.20	Peak
5		5574.04	81.49	20.11	101.60	N/A	N/A	Peak
6		5725.00	37.67	21.34	59.01	-9.19	68.20	Peak
7	*	5726.92	39.63	21.33	60.96	-7.24	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT160 at 5570MHz		

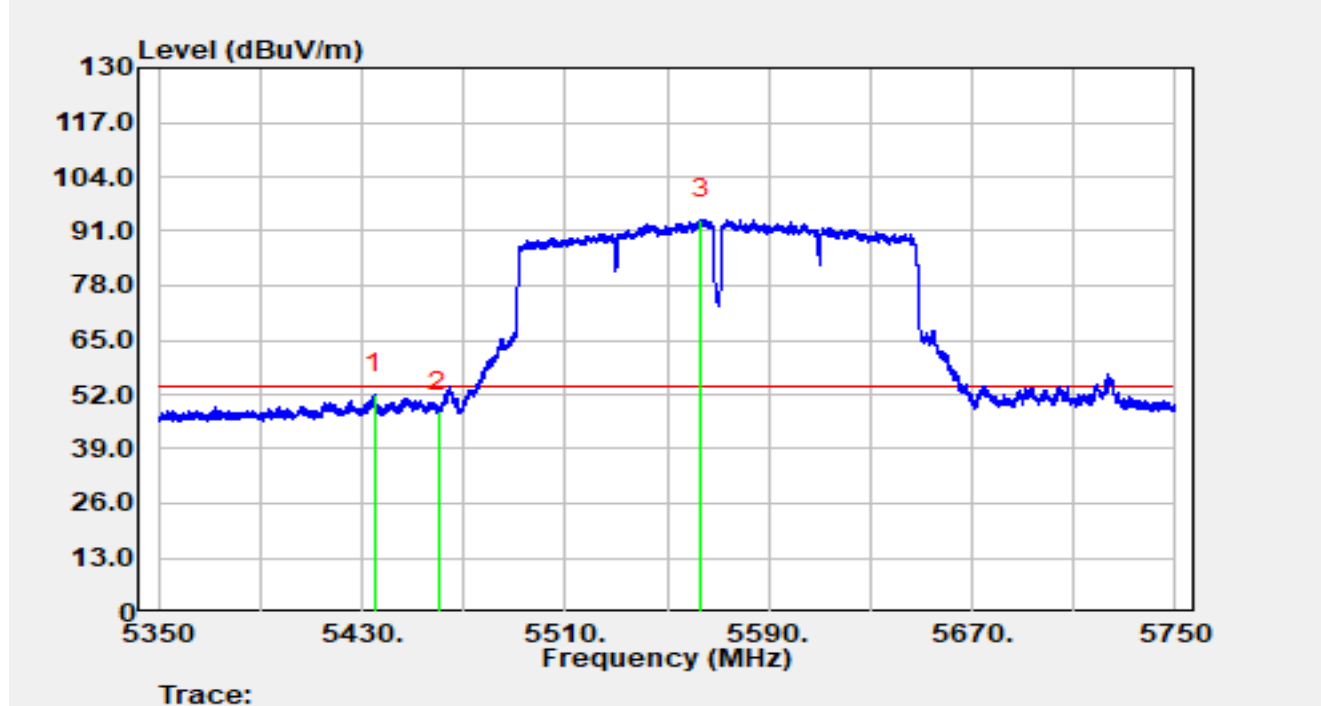


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5435.04	32.07	19.97	52.05	-1.95	54.00	Average
2		5460.00	27.86	20.15	48.01	-5.99	54.00	Average
3		5563.56	73.70	20.16	93.86	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

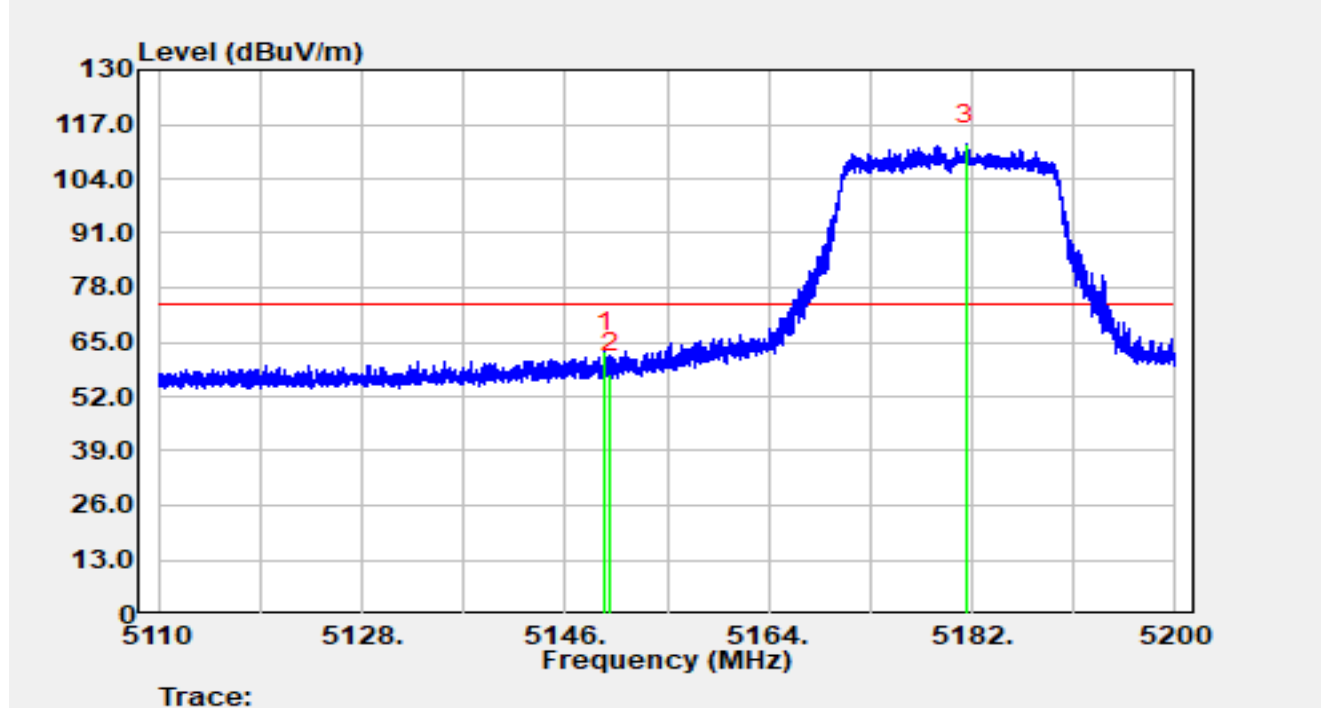


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.56	43.12	19.43	62.55	-11.45	74.00	Peak
2		5150.00	38.20	19.43	57.63	-16.37	74.00	Peak
3		5181.44	92.50	19.80	112.31	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

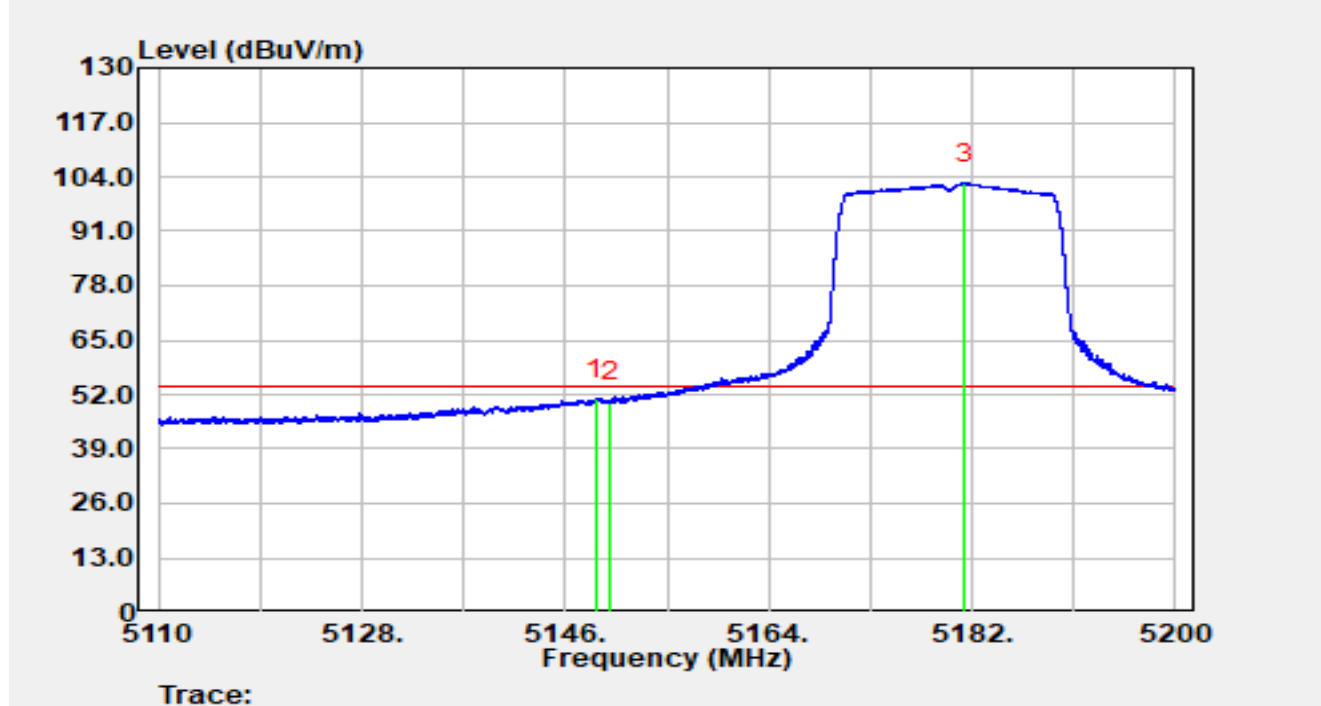


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.75	31.45	19.43	50.88	-3.12	54.00	Average
2		5150.00	30.77	19.43	50.20	-3.80	54.00	Average
3		5181.33	82.54	19.80	102.34	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

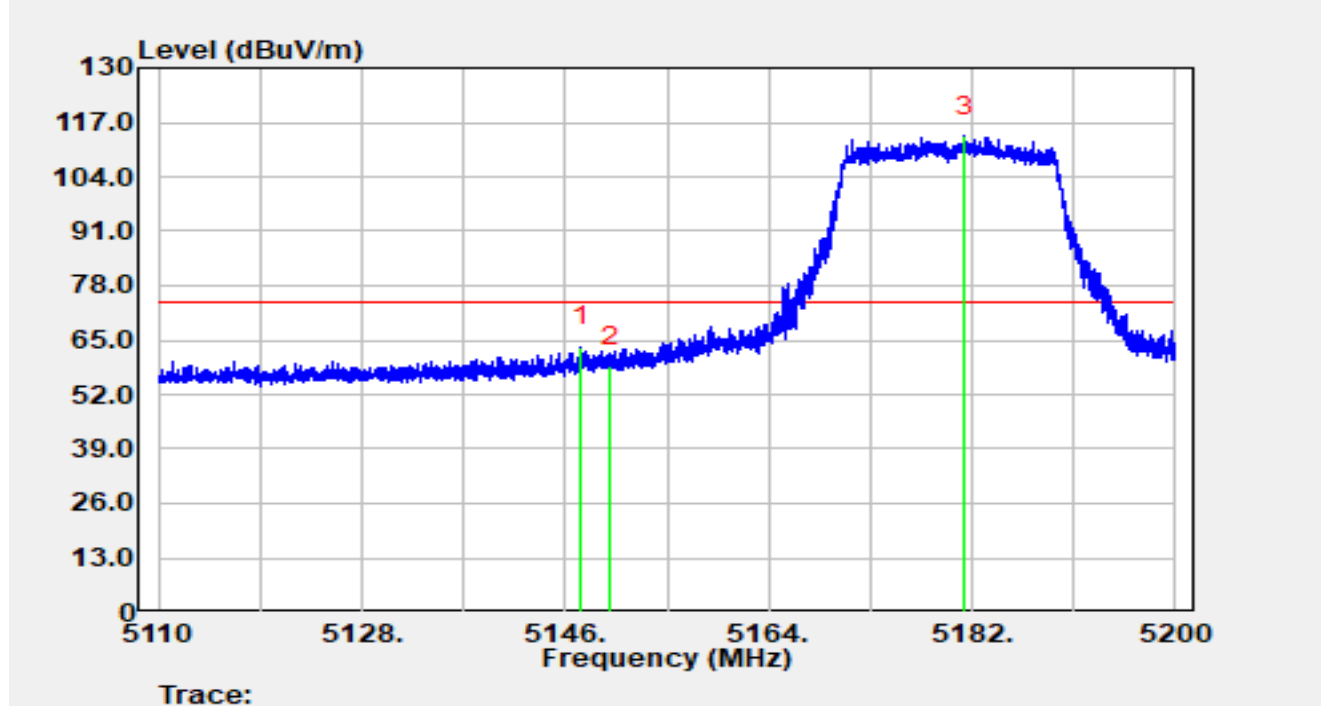


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.41	43.97	19.43	63.41	-10.59	74.00	Peak
2		5150.00	39.43	19.43	58.86	-15.14	74.00	Peak
3		5181.31	93.86	19.80	113.67	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5180MHz		

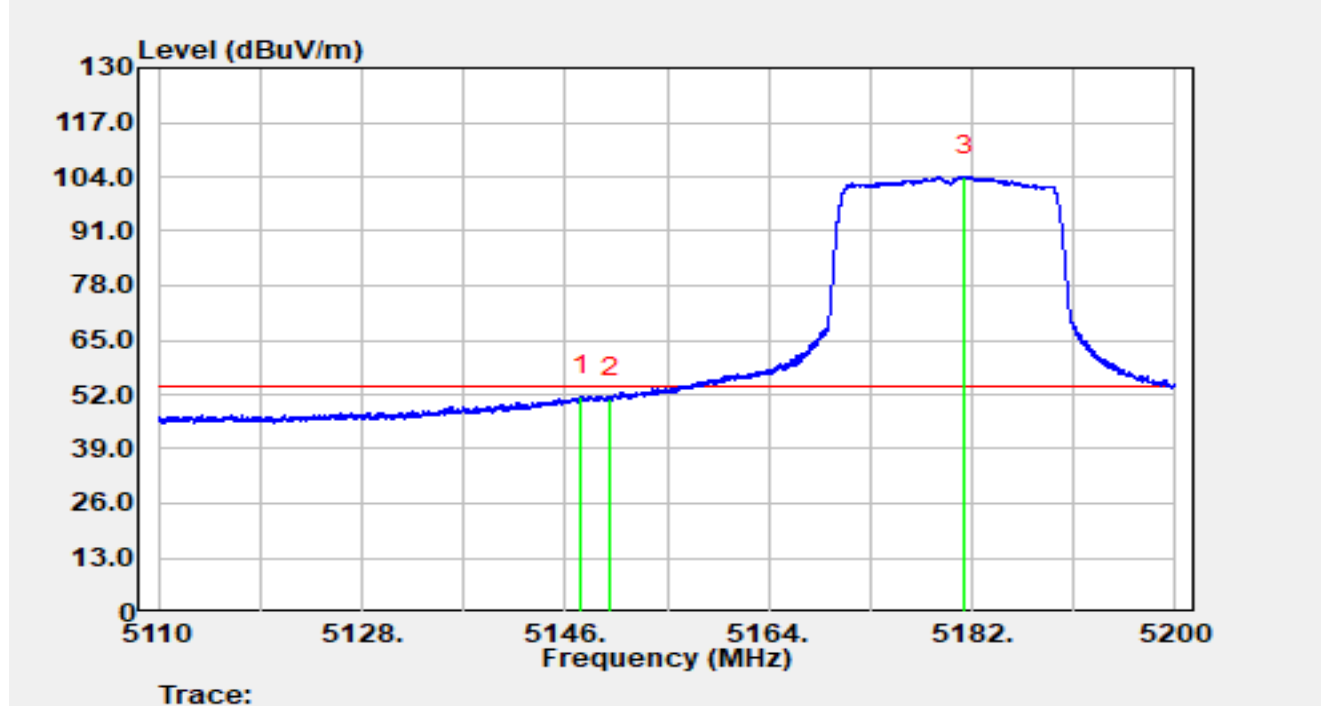


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.38	32.23	19.43	51.67	-2.33	54.00	Average
2		5150.00	31.78	19.43	51.21	-2.79	54.00	Average
3		5181.39	84.43	19.80	104.23	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

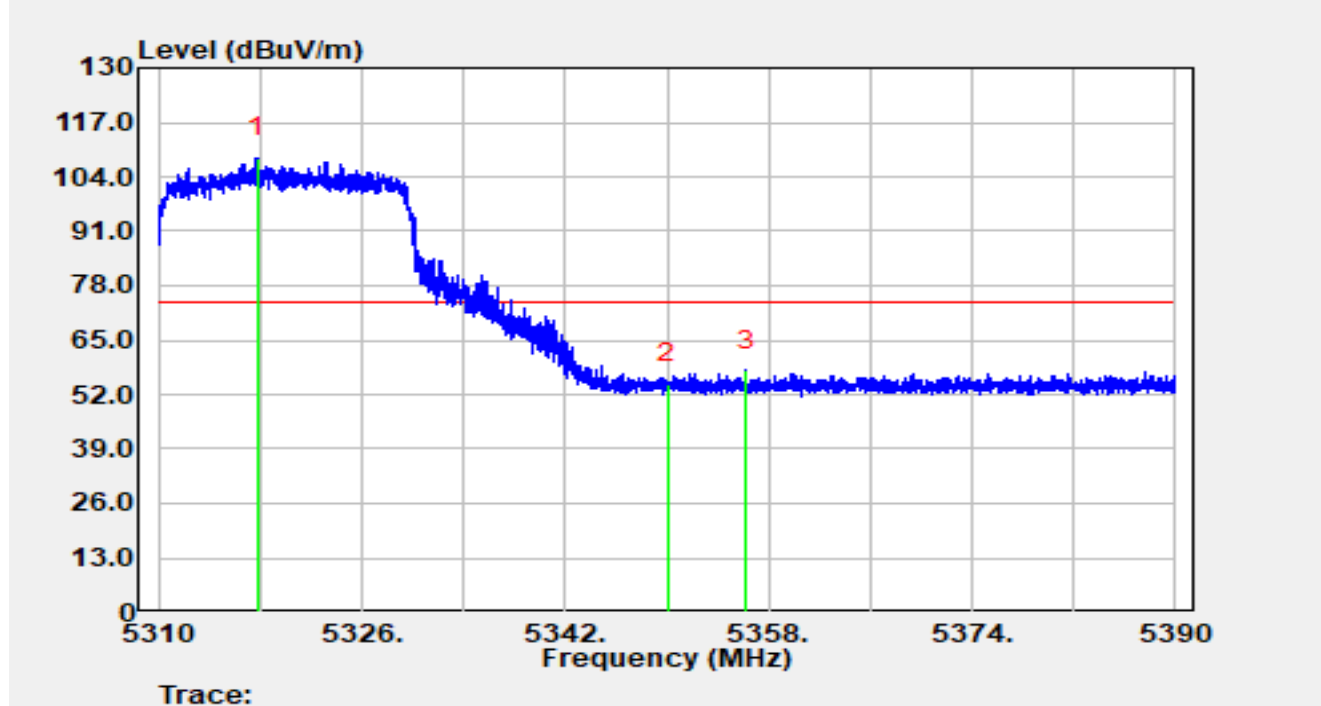


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.73	89.09	19.53	108.62	N/A	N/A	Peak
2		5350.00	34.62	19.85	54.47	-19.53	74.00	Peak
3	*	5356.21	37.86	19.90	57.77	-16.23	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

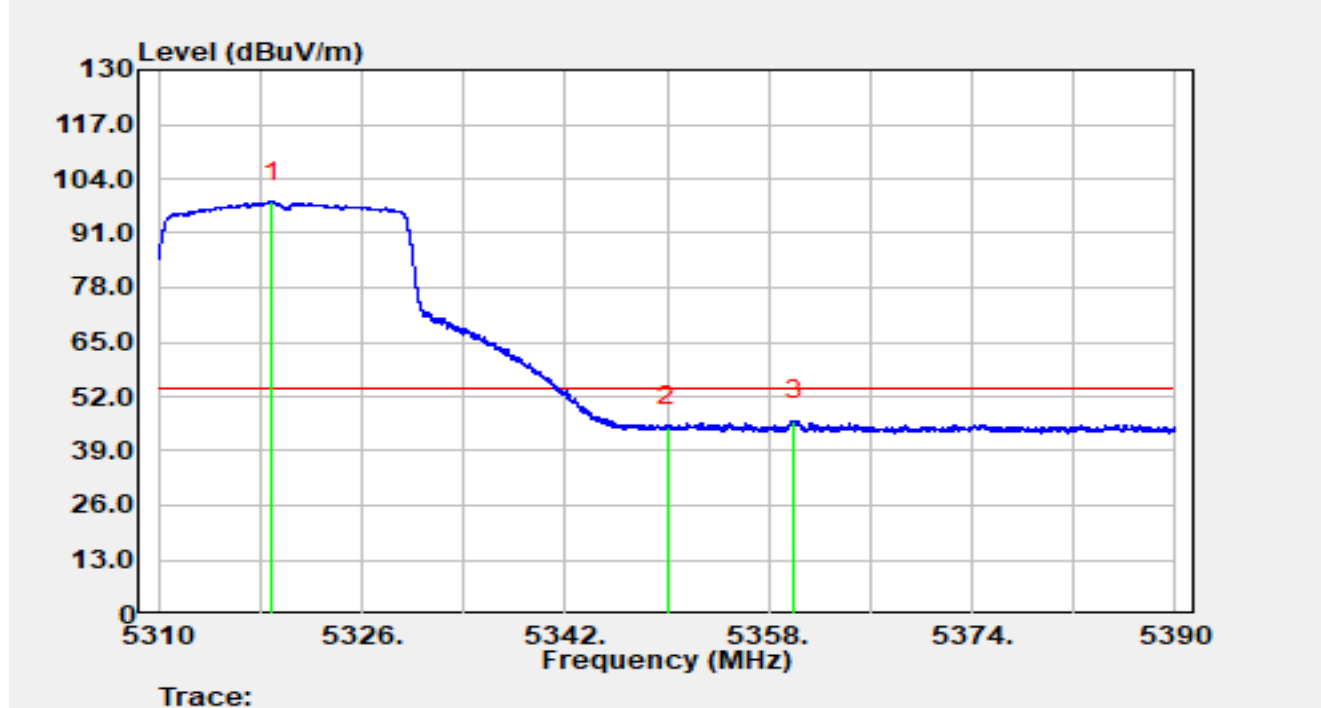


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.97	78.91	19.53	98.45	N/A	N/A	Average
2		5350.00	24.80	19.85	44.66	-9.34	54.00	Average
3	*	5359.96	26.35	19.91	46.26	-7.74	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

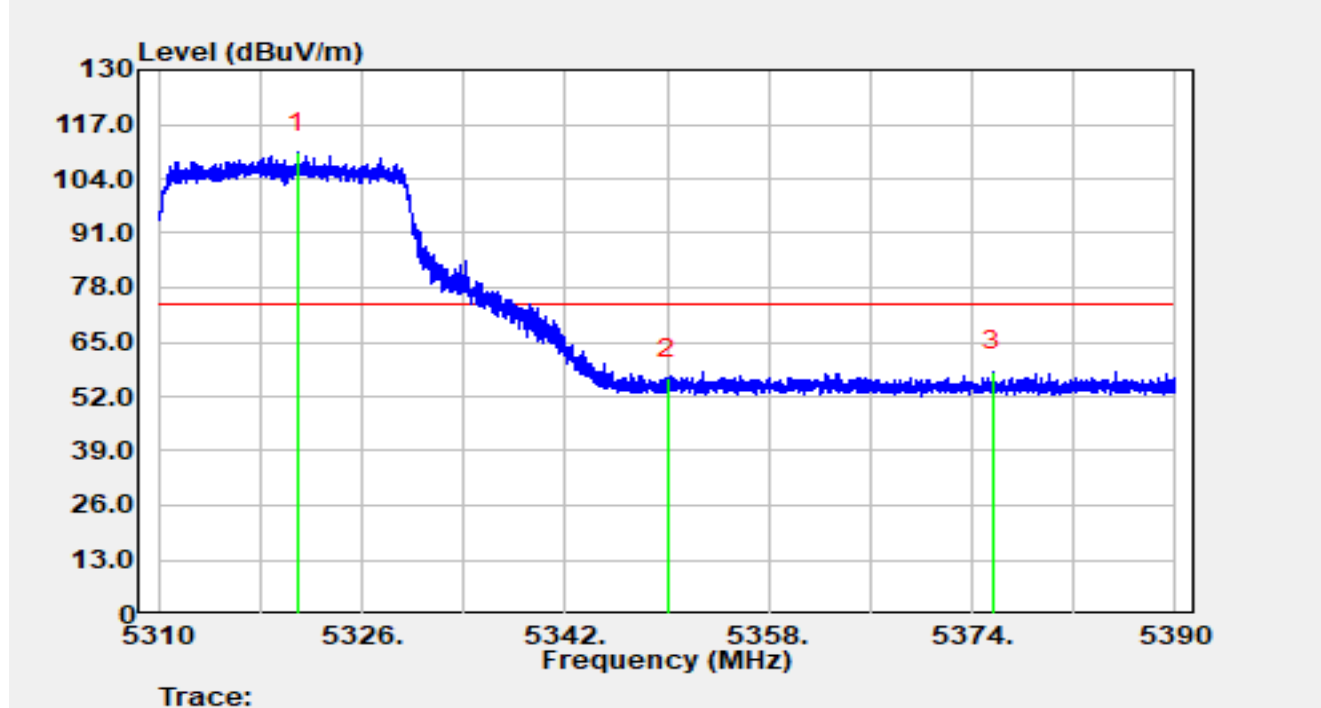


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.94	90.61	19.54	110.15	N/A	N/A	Peak
2		5350.00	36.44	19.85	56.29	-17.71	74.00	Peak
3	*	5375.59	38.14	19.94	58.09	-15.91	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5320MHz		

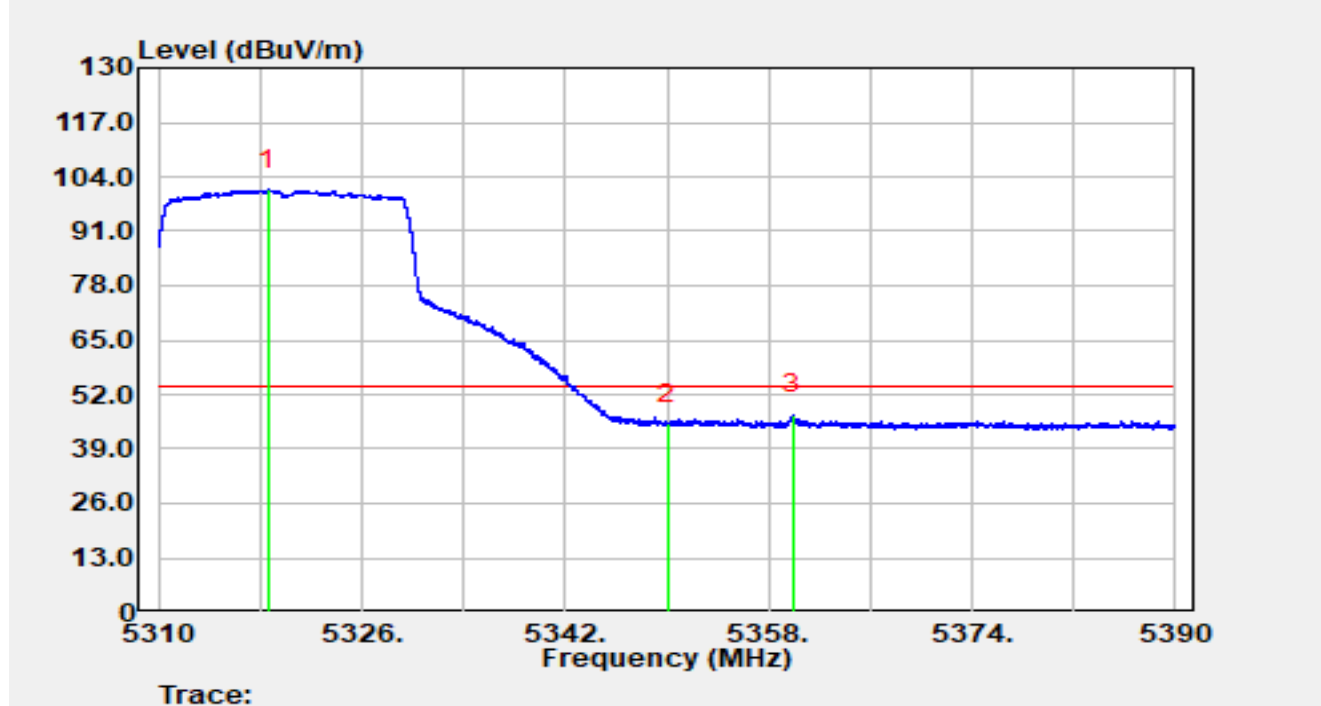


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.62	81.39	19.53	100.92	N/A	N/A	Average
2		5350.00	25.08	19.85	44.93	-9.07	54.00	Average
3	*	5359.90	27.20	19.91	47.11	-6.89	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

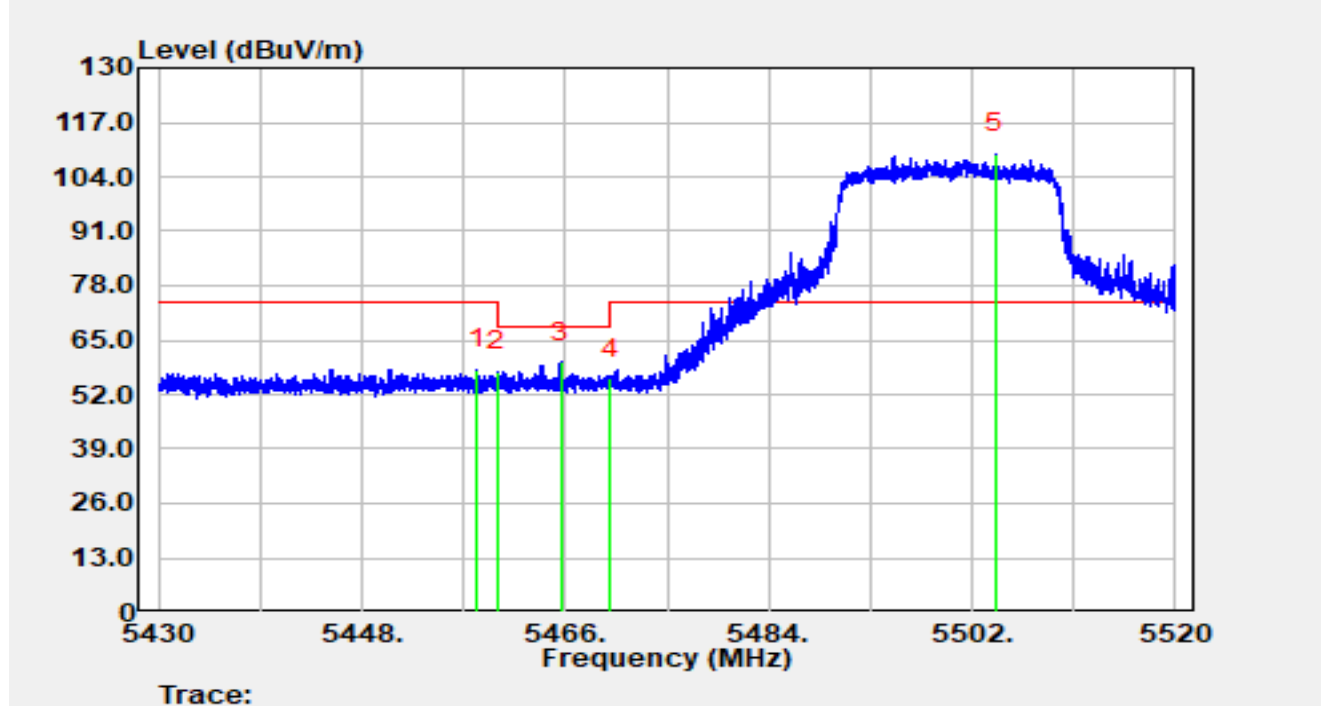


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.23	37.75	20.14	57.90	-16.10	74.00	Peak
2		5460.00	37.25	20.15	57.40	-16.60	74.00	Peak
3	*	5465.59	39.64	20.09	59.73	-8.47	68.20	Peak
4		5470.00	35.72	20.03	55.75	-12.45	68.20	Peak
5		5504.05	89.81	19.69	109.50	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

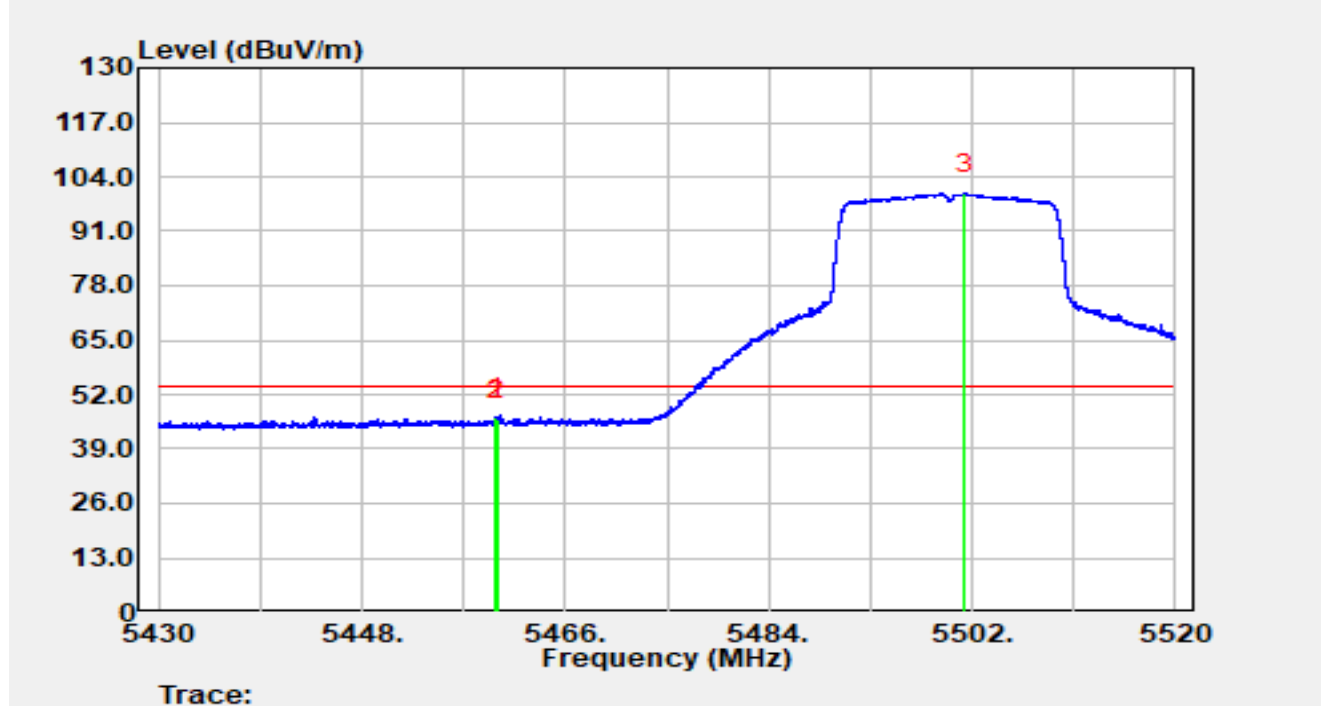


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.90	26.35	20.15	46.50	-7.50	54.00	Average
2		5460.00	25.87	20.15	46.02	-7.98	54.00	Average
3		5501.33	80.29	19.68	99.97	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

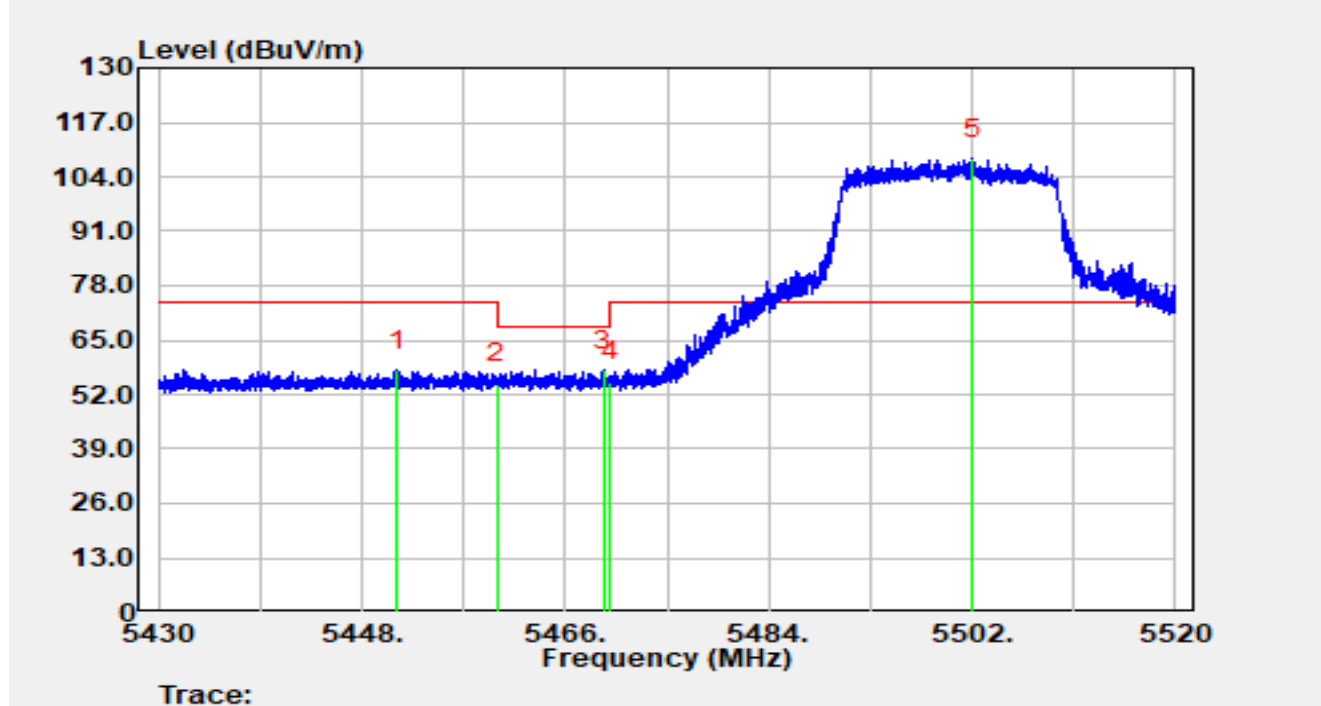


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.17	37.59	20.12	57.71	-16.29	74.00	Peak
2		5460.00	34.47	20.15	54.61	-19.39	74.00	Peak
3	*	5469.36	37.75	20.04	57.79	-10.41	68.20	Peak
4		5470.00	34.91	20.03	54.95	-13.25	68.20	Peak
5		5502.09	88.50	19.68	108.18	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5500MHz		

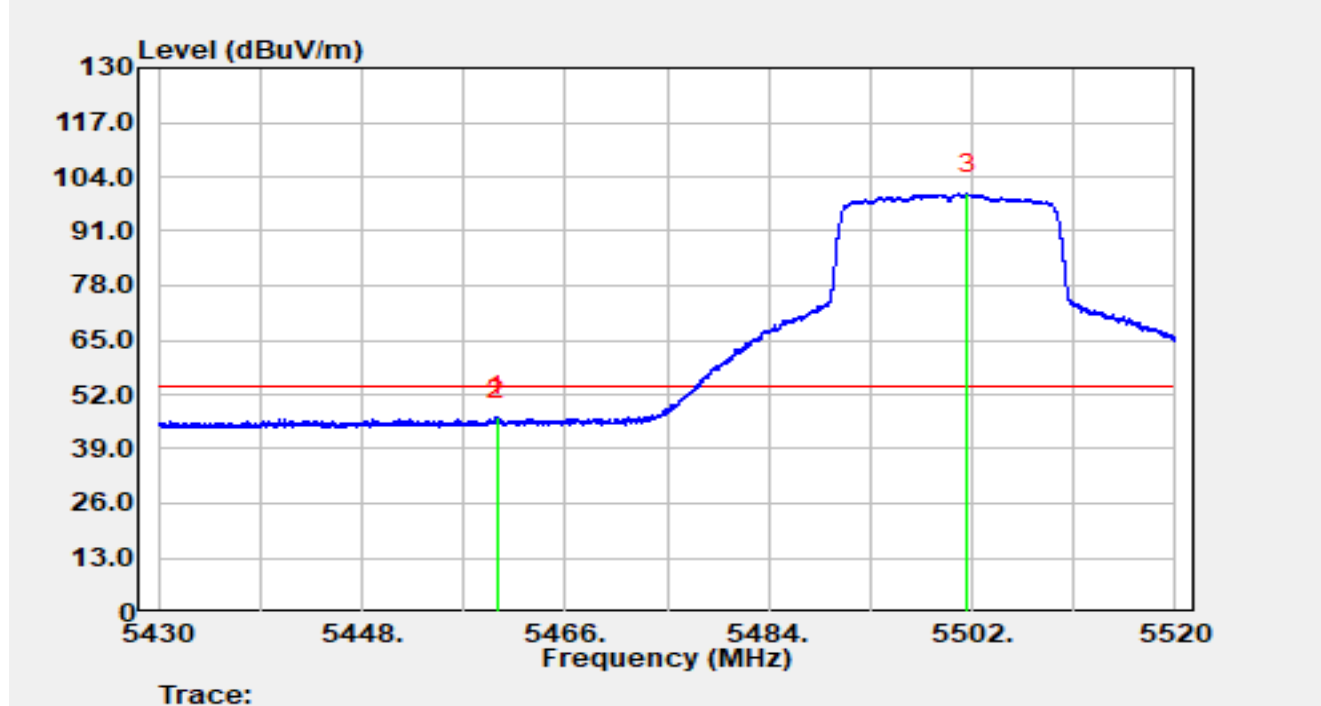


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.94	26.61	20.15	46.75	-7.25	54.00	Average
2		5460.00	25.65	20.15	45.79	-8.21	54.00	Average
3		5501.60	80.24	19.68	99.92	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5700MHz		

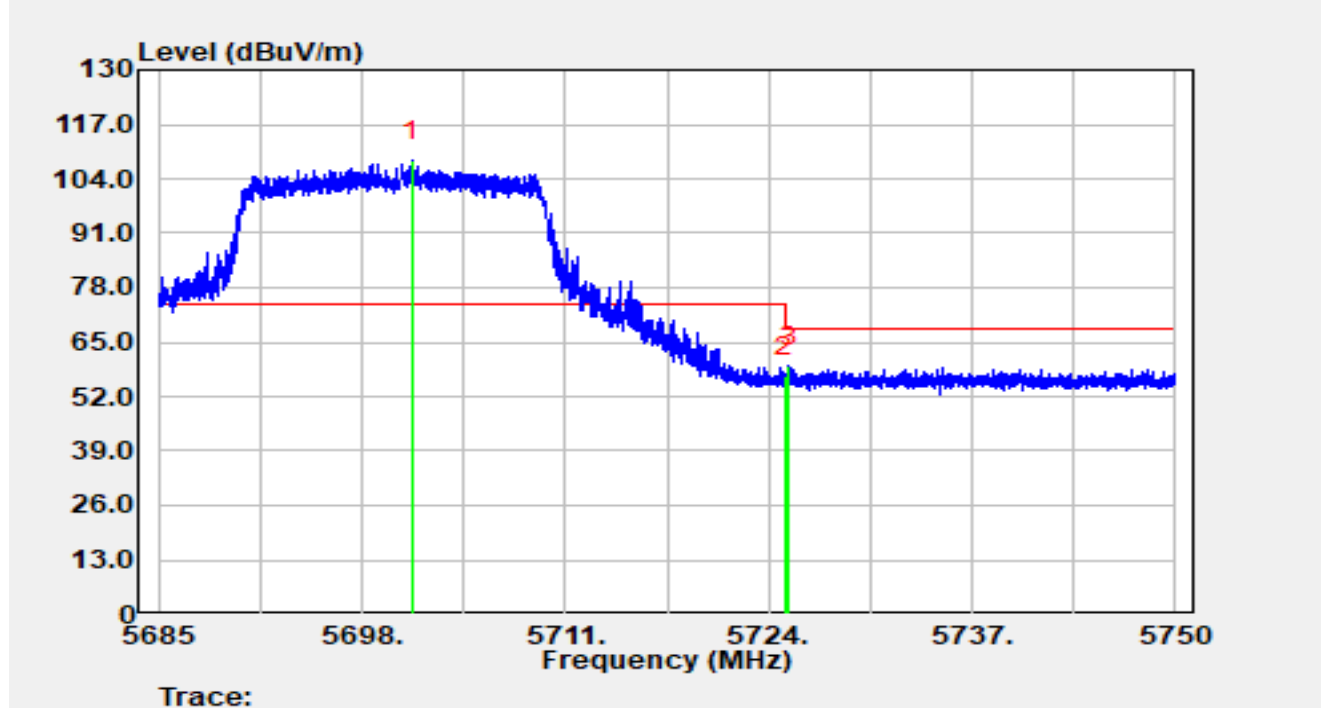


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.18	87.20	21.12	108.31	N/A	N/A	Peak
2		5725.00	35.56	21.34	56.90	-11.30	68.20	Peak
3	*	5725.33	37.87	21.34	59.21	-8.99	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5700MHz		

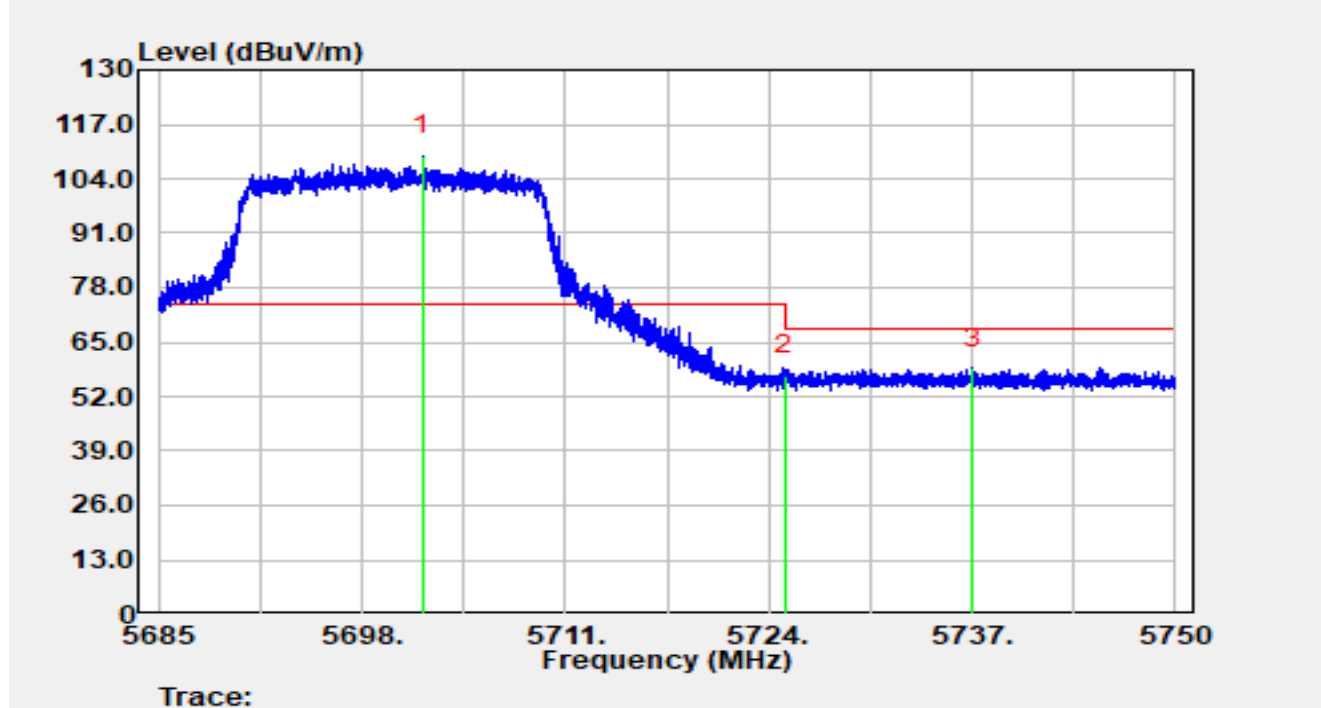


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.91	88.36	21.13	109.49	N/A	N/A	Peak
2		5725.00	35.57	21.34	56.91	-11.29	68.20	Peak
3	*	5737.05	37.50	21.27	58.77	-9.43	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5745MHz		

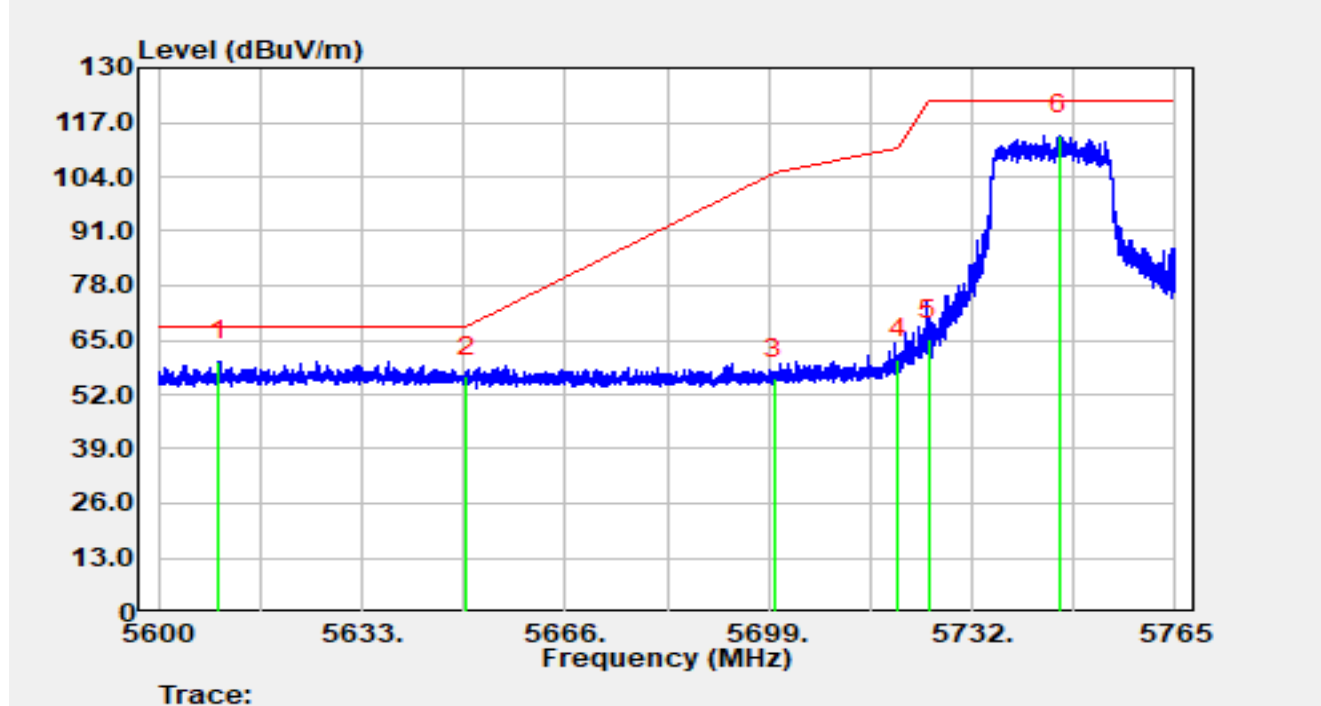


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5609.87	39.50	20.56	60.06	-8.14	68.20	Peak
2		5650.00	35.70	20.63	56.33	-11.87	68.20	Peak
3		5700.00	34.75	21.09	55.84	-49.36	105.20	Peak
4		5720.00	39.21	21.36	60.57	-50.23	110.80	Peak
5		5725.00	43.80	21.34	65.14	-57.06	122.20	Peak
6		5746.06	92.87	21.18	114.06	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5745MHz		

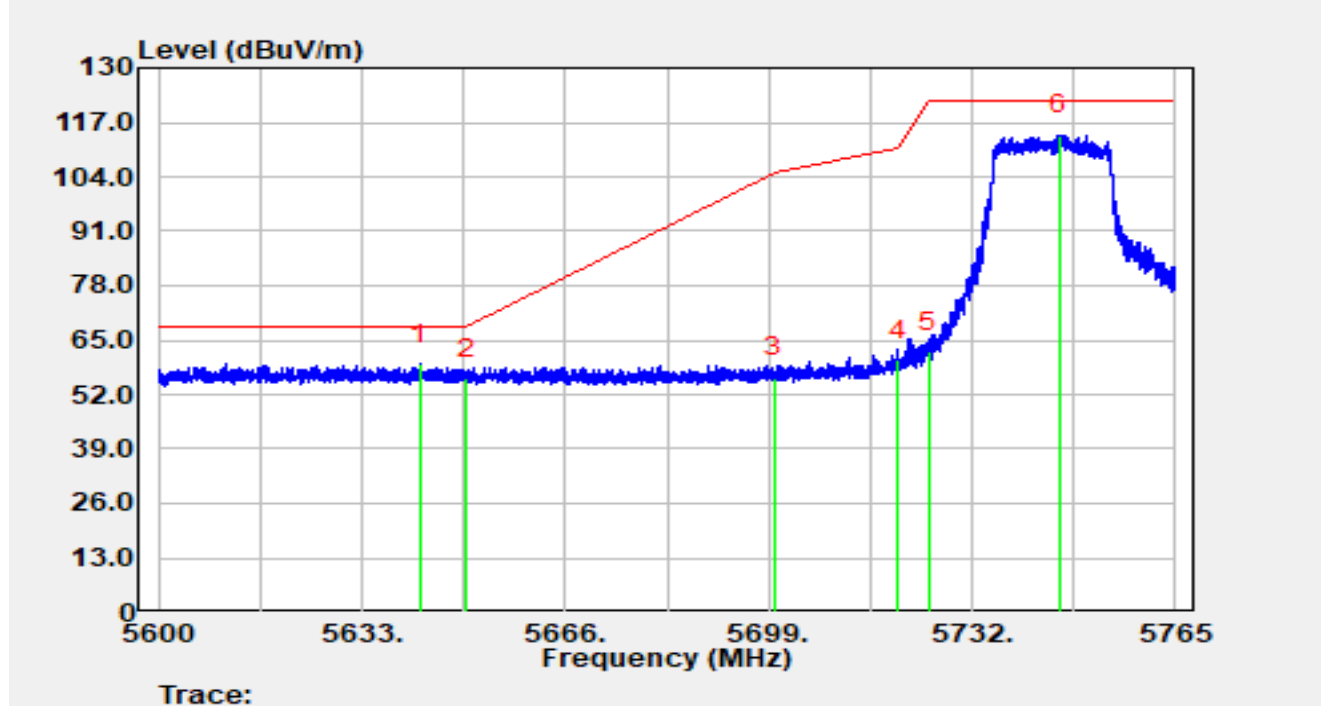


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.42	38.52	20.71	59.24	-8.96	68.20	Peak
2		5650.00	35.10	20.63	55.73	-12.47	68.20	Peak
3		5700.00	35.01	21.09	56.09	-49.11	105.20	Peak
4		5720.00	38.94	21.36	60.30	-50.50	110.80	Peak
5		5725.00	40.90	21.34	62.24	-59.96	122.20	Peak
6		5746.21	92.86	21.18	114.05	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5825MHz		

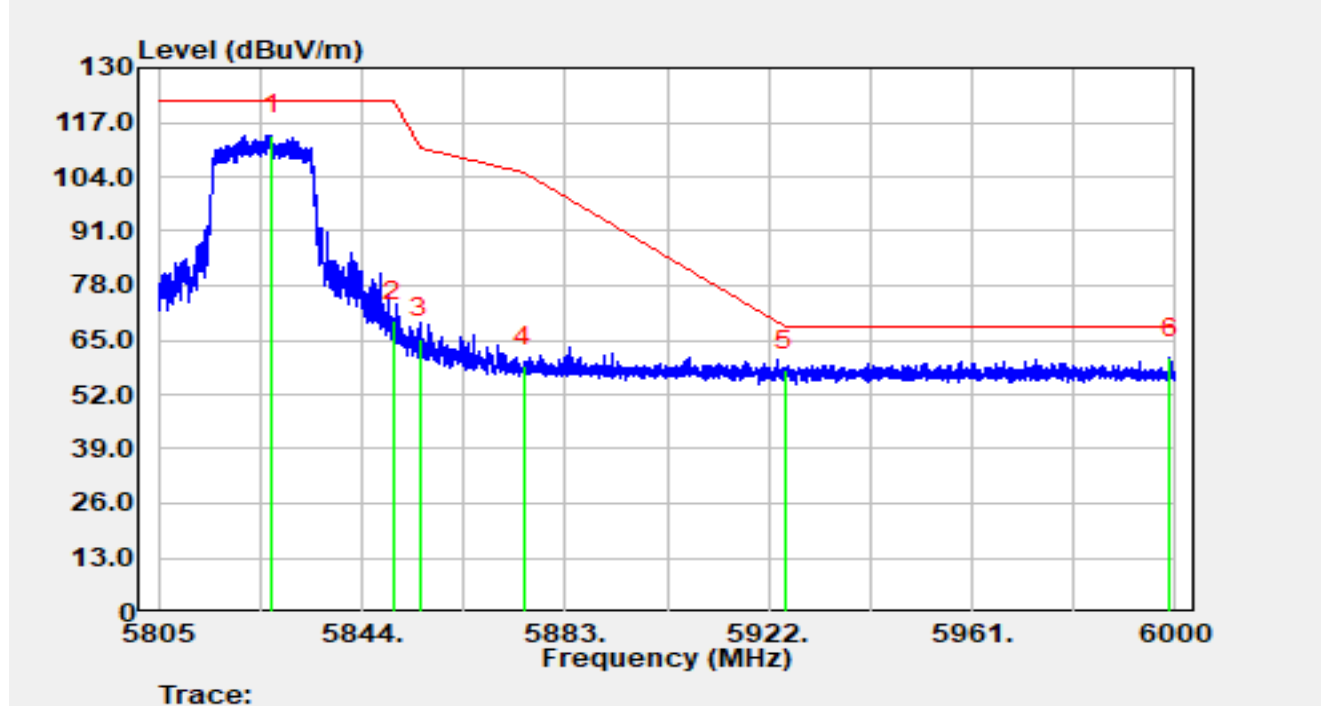


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.72	92.53	21.52	114.05	N/A	N/A	Peak
2		5850.00	48.23	21.33	69.57	-52.63	122.20	Peak
3		5855.00	43.93	21.33	65.26	-45.54	110.80	Peak
4		5875.00	37.12	21.59	58.71	-46.49	105.20	Peak
5		5925.00	36.34	21.49	57.83	-10.37	68.20	Peak
6	*	5999.03	38.78	21.86	60.64	-7.56	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE20 at 5825MHz		

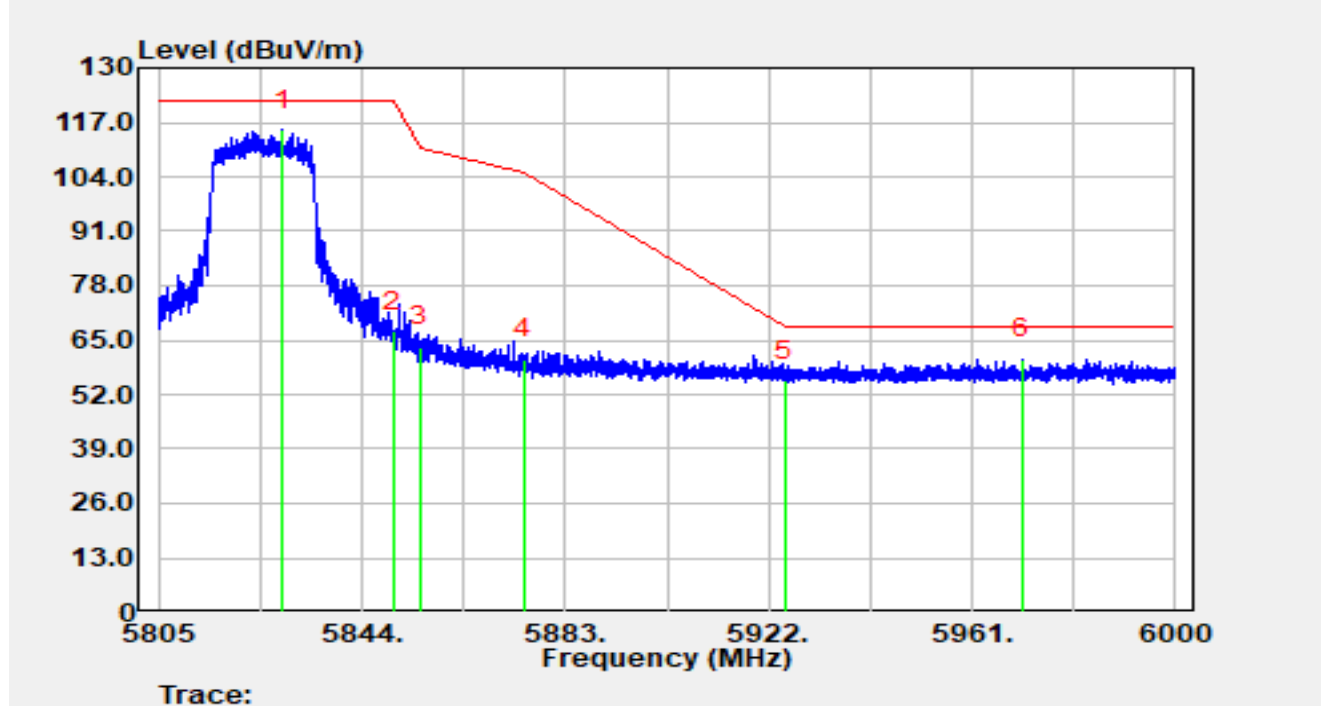


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.81	93.68	21.50	115.19	N/A	N/A	Peak
2		5850.00	45.80	21.33	67.13	-55.07	122.20	Peak
3		5855.00	41.99	21.33	63.32	-47.48	110.80	Peak
4		5875.00	38.97	21.59	60.56	-44.64	105.20	Peak
5		5925.00	33.90	21.49	55.40	-12.80	68.20	Peak
6	*	5970.65	38.55	21.89	60.44	-7.76	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

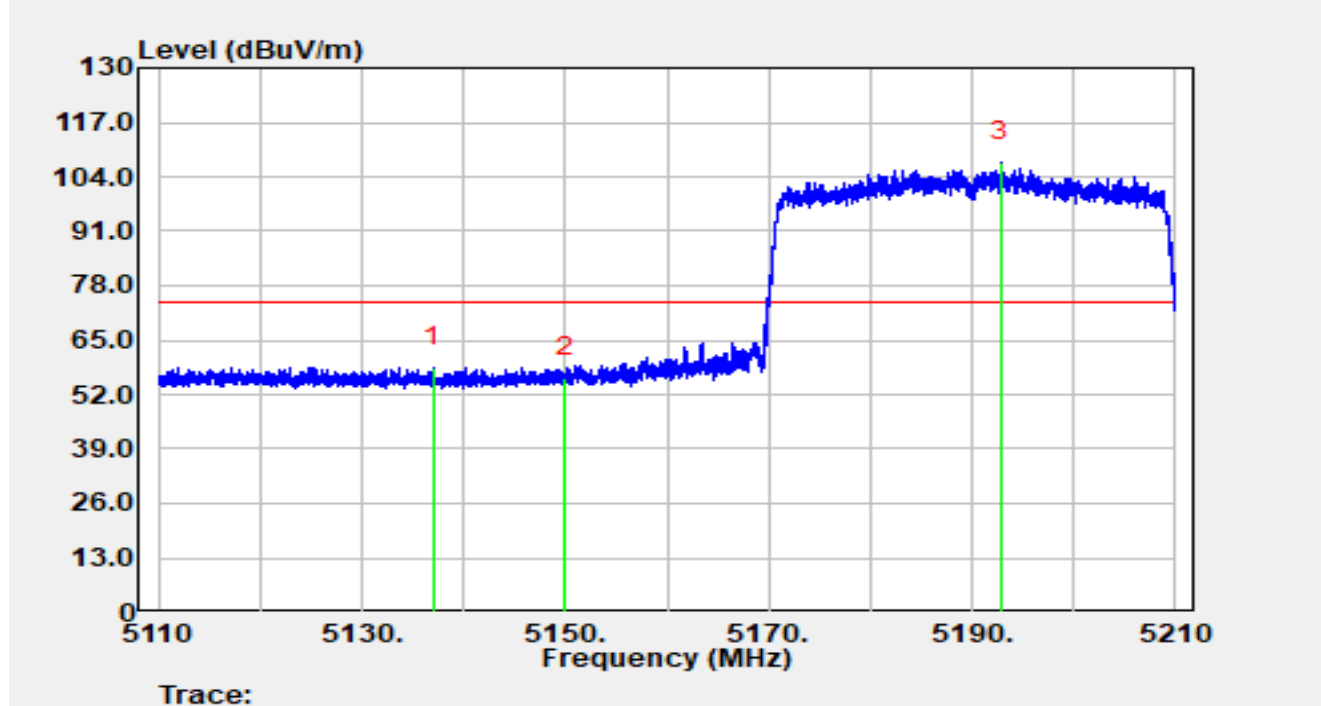


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5137.05	39.13	19.45	58.58	-15.42	74.00	Peak
2		5150.00	36.64	19.43	56.07	-17.93	74.00	Peak
3		5192.87	87.85	19.77	107.62	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- 4.The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

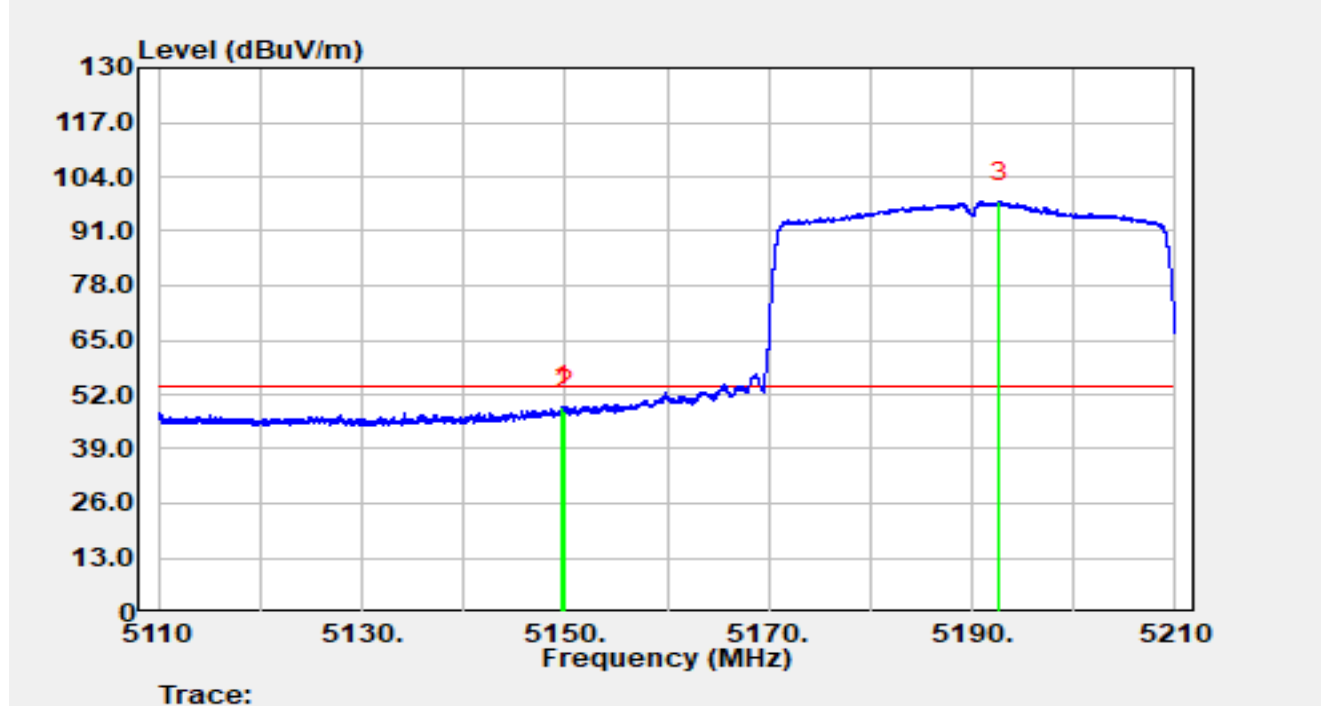


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.69	29.80	19.43	49.23	-4.77	54.00	Average
2		5150.00	28.67	19.43	48.10	-5.90	54.00	Average
3		5192.65	78.32	19.77	98.09	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

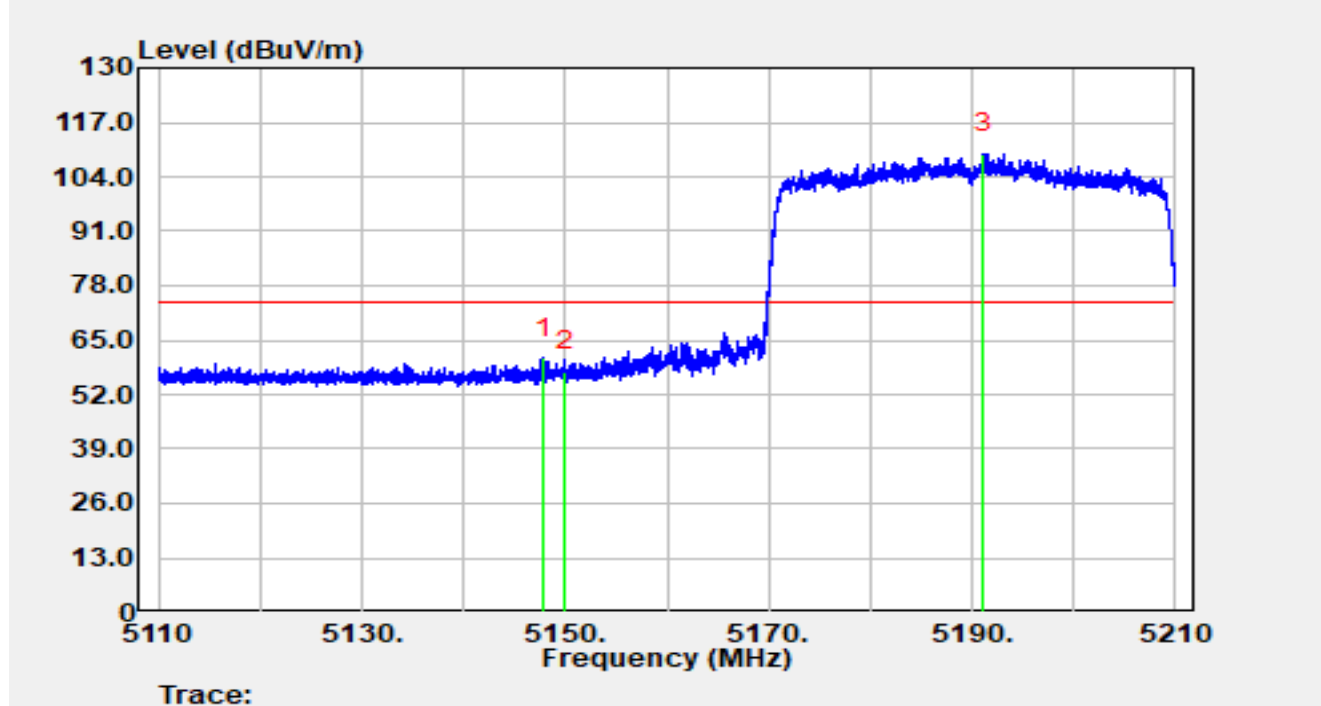


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.93	41.35	19.43	60.78	-13.22	74.00	Peak
2		5150.00	38.17	19.43	57.60	-16.40	74.00	Peak
3		5191.17	89.75	19.79	109.53	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5190MHz		

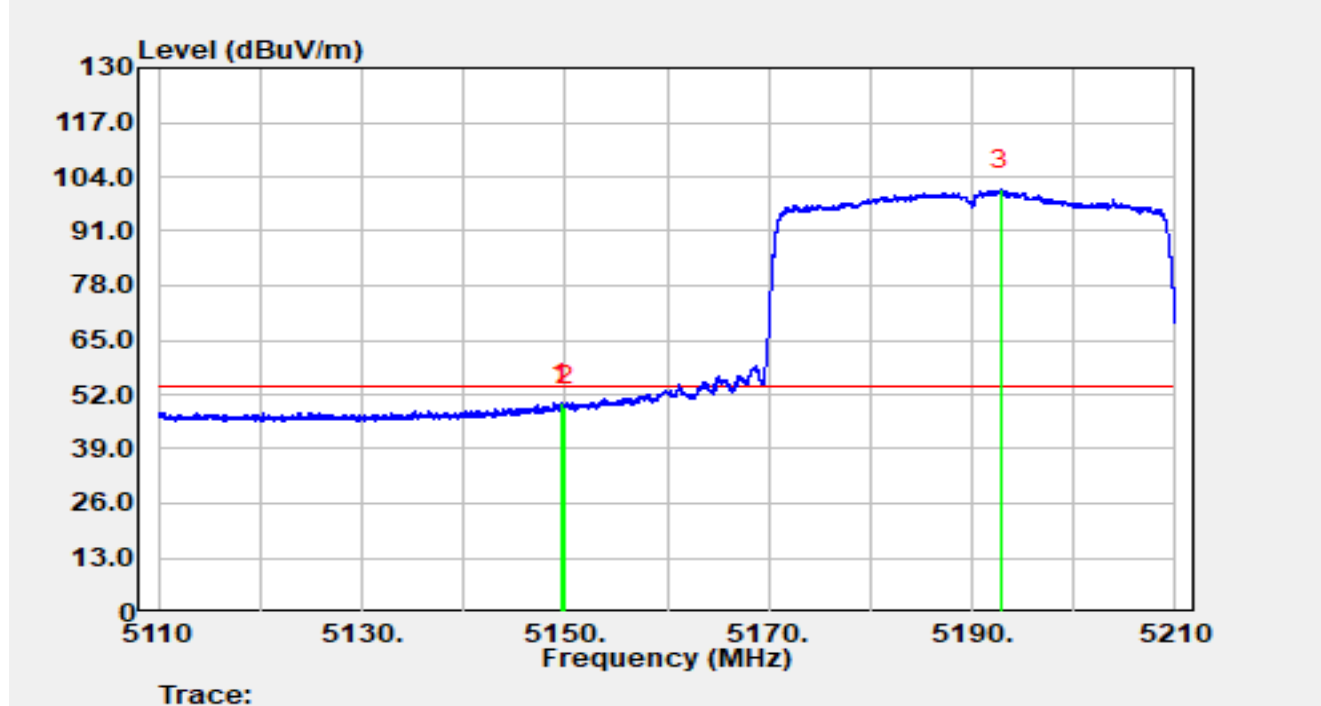


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.59	30.55	19.43	49.98	-4.02	54.00	Average
2		5150.00	29.82	19.43	49.25	-4.75	54.00	Average
3		5192.80	81.10	19.77	100.86	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

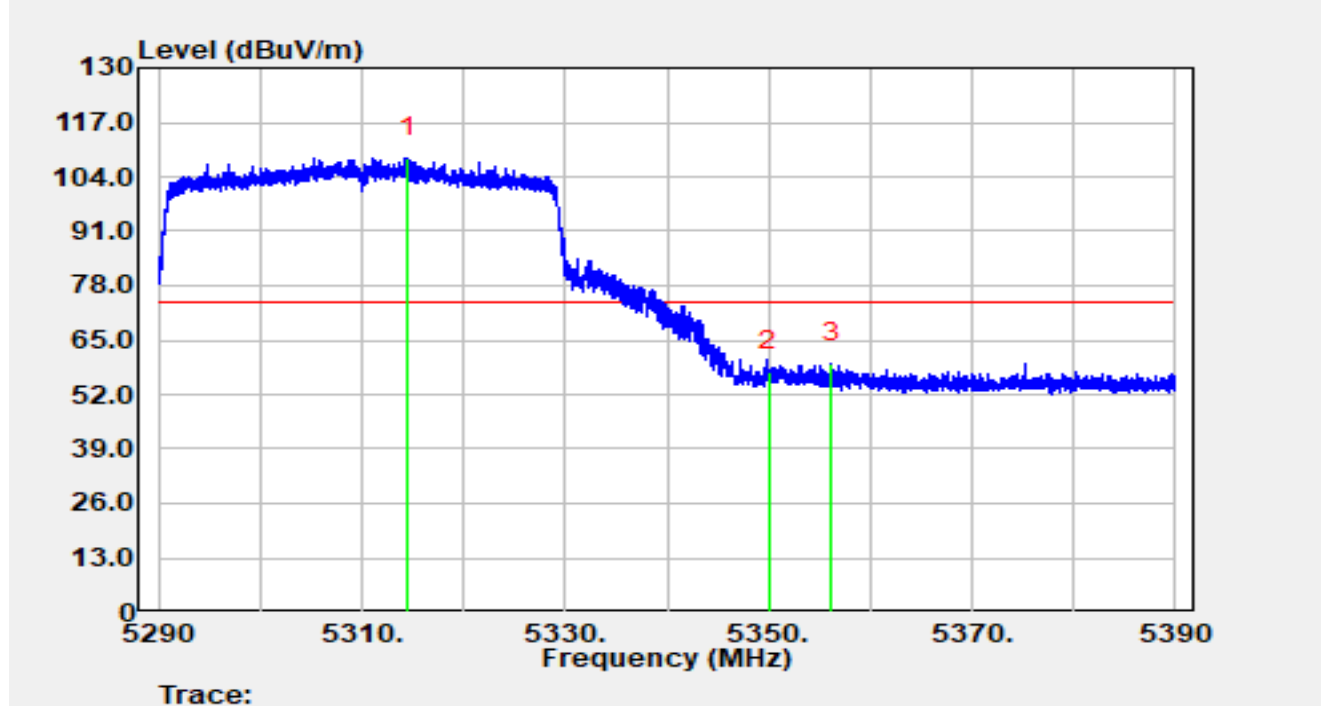


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.56	88.98	19.52	108.50	N/A	N/A	Peak
2		5350.00	37.68	19.85	57.53	-16.47	74.00	Peak
3	*	5356.22	39.57	19.90	59.48	-14.52	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

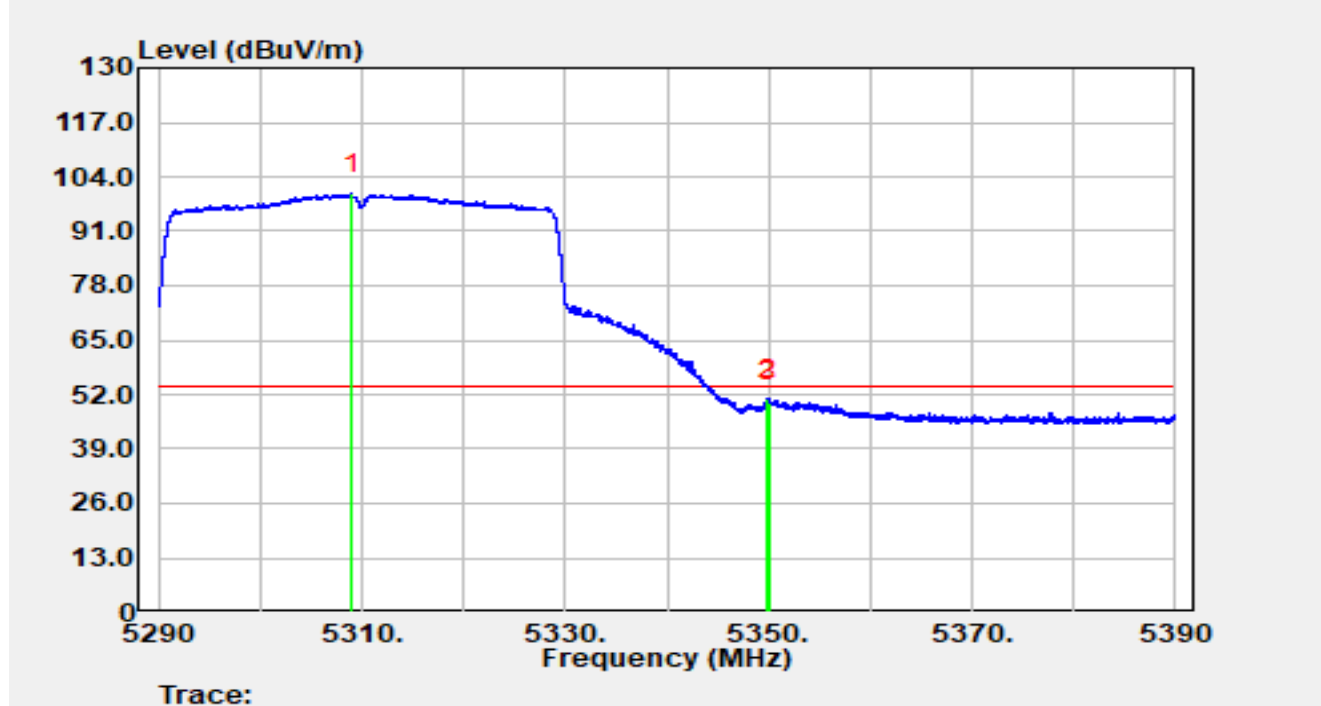


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5309.00	80.32	19.52	99.84	N/A	N/A	Average
2	*	5349.95	30.99	19.85	50.84	-3.16	54.00	Average
3		5350.00	30.19	19.85	50.04	-3.96	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

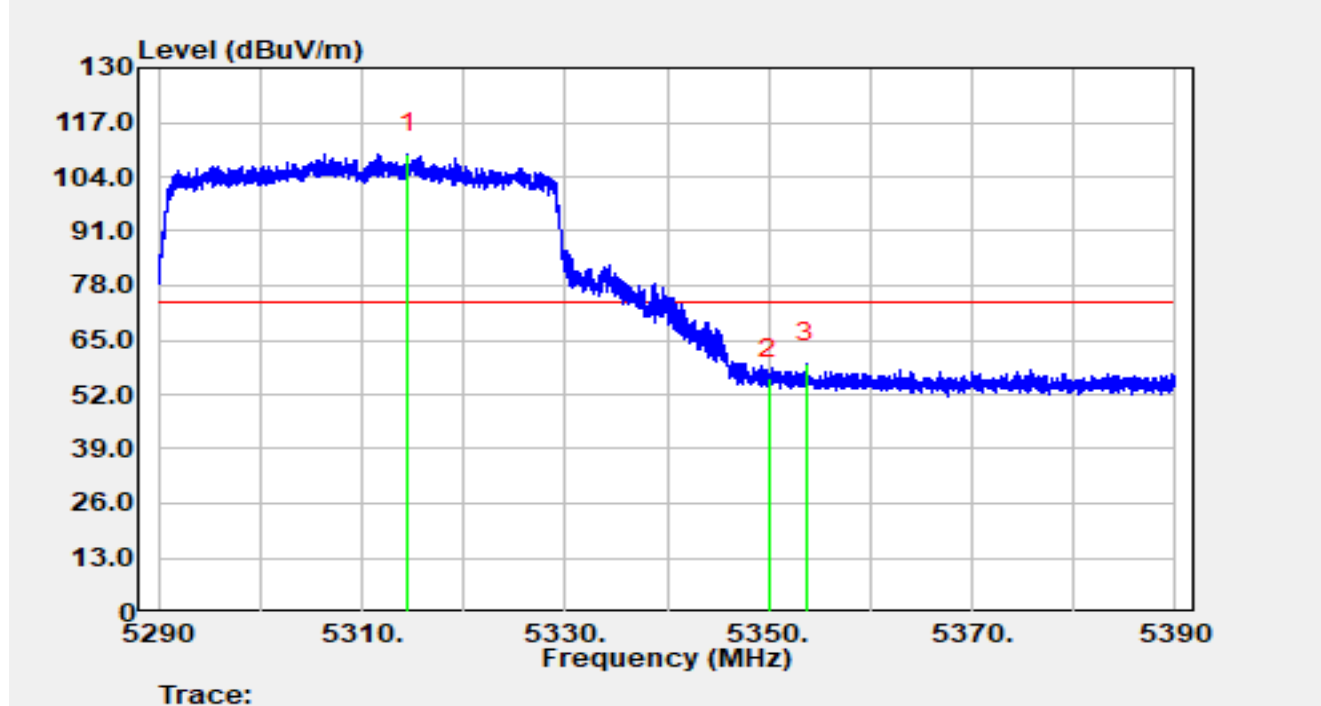


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.54	90.09	19.52	109.61	N/A	N/A	Peak
2		5350.00	36.06	19.85	55.91	-18.09	74.00	Peak
3	*	5353.69	39.62	19.88	59.51	-14.49	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5310MHz		

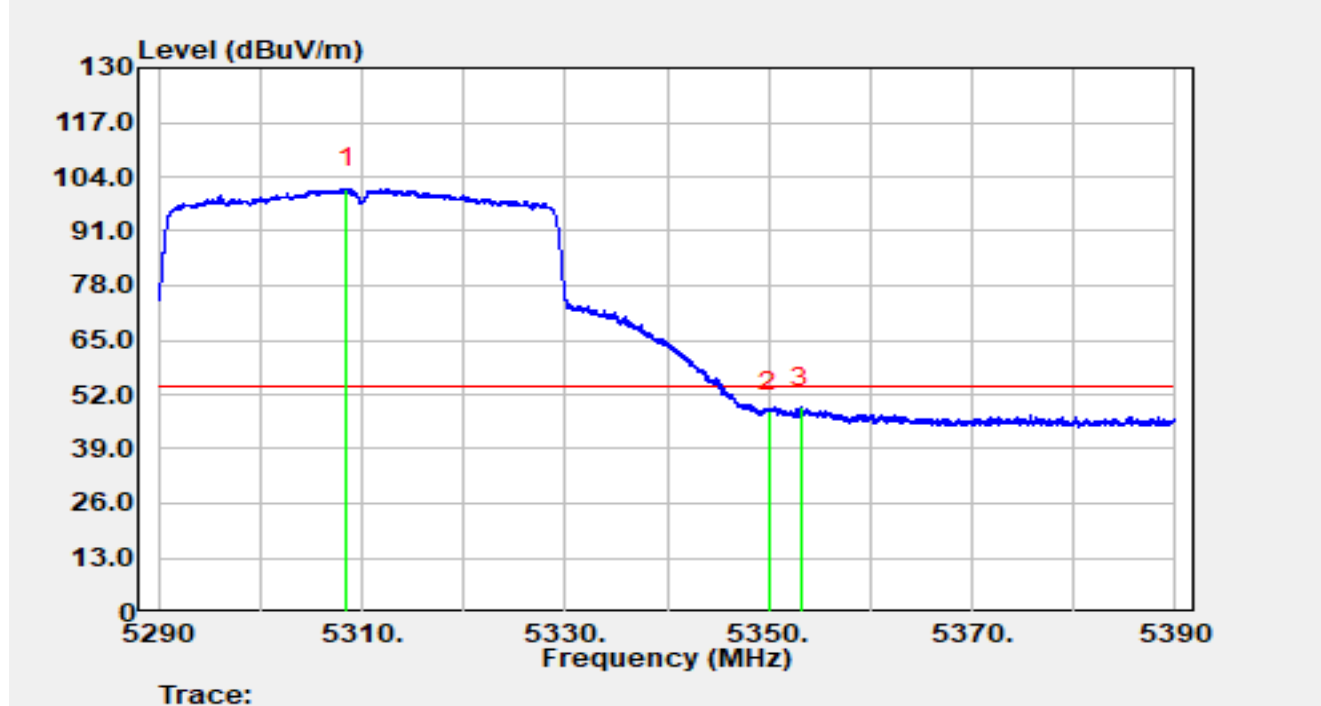


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.53	81.74	19.52	101.26	N/A	N/A	Average
2		5350.00	28.08	19.85	47.93	-6.07	54.00	Average
3	*	5353.20	29.02	19.88	48.90	-5.10	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

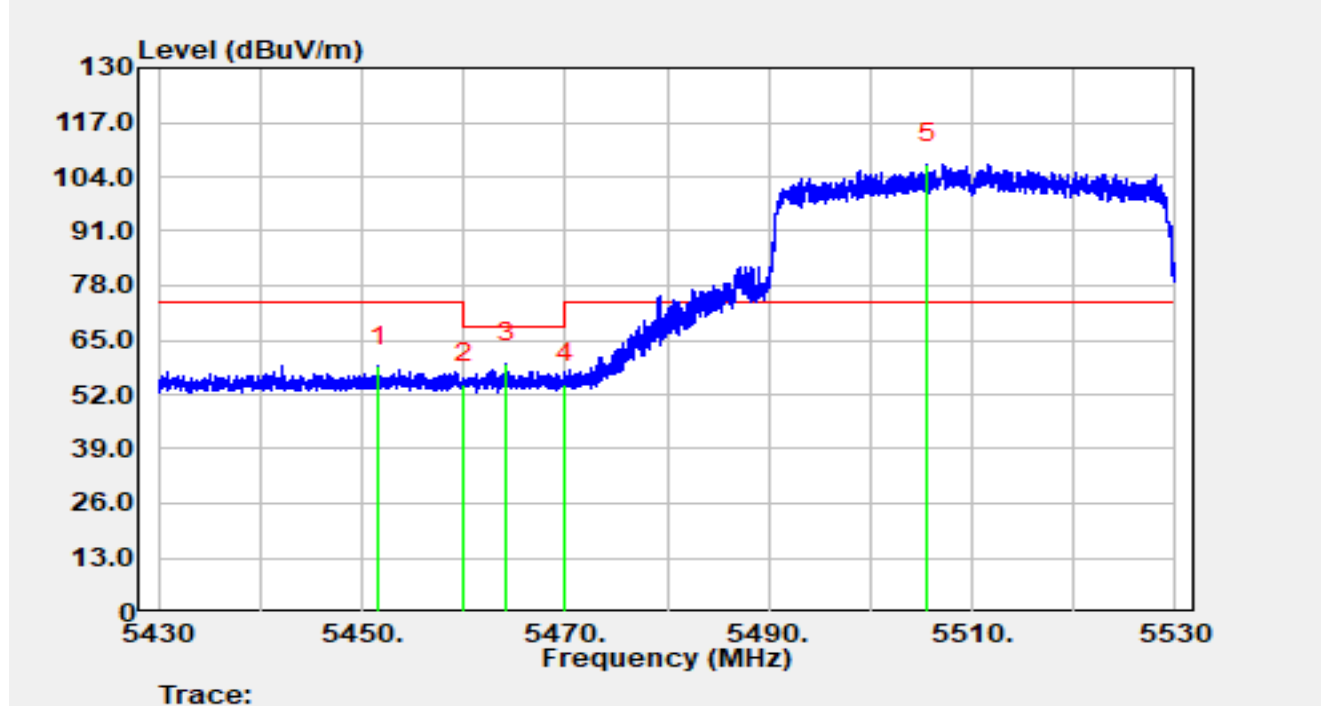


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5451.58	38.56	20.12	58.69	-15.31	74.00	Peak
2		5460.00	34.40	20.15	54.54	-13.66	68.20	Peak
3	*	5464.18	39.45	20.11	59.56	-8.64	68.20	Peak
4		5470.00	34.56	20.03	54.60	-13.60	68.20	Peak
5		5505.55	87.41	19.70	107.11	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

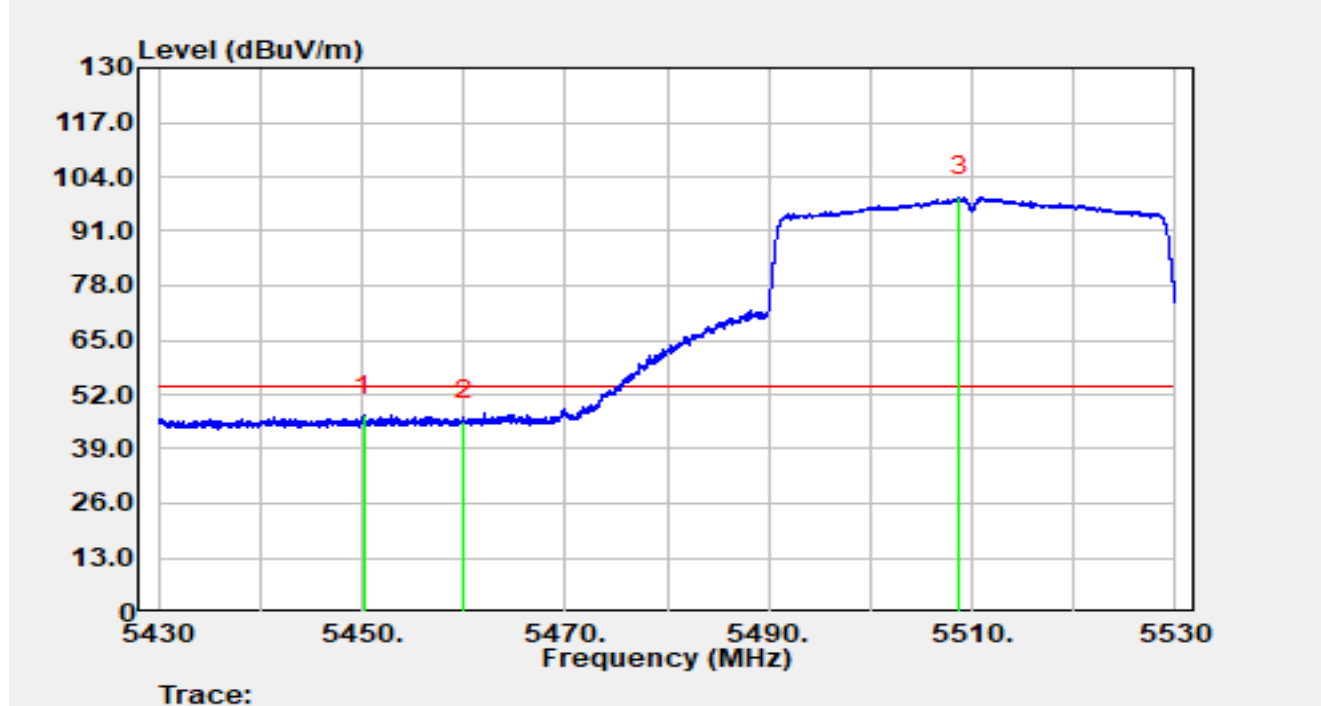


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5450.15	26.90	20.12	47.02	-6.98	54.00	Average
2		5460.00	25.64	20.15	45.79	-8.21	54.00	Average
3		5508.70	79.46	19.71	99.17	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

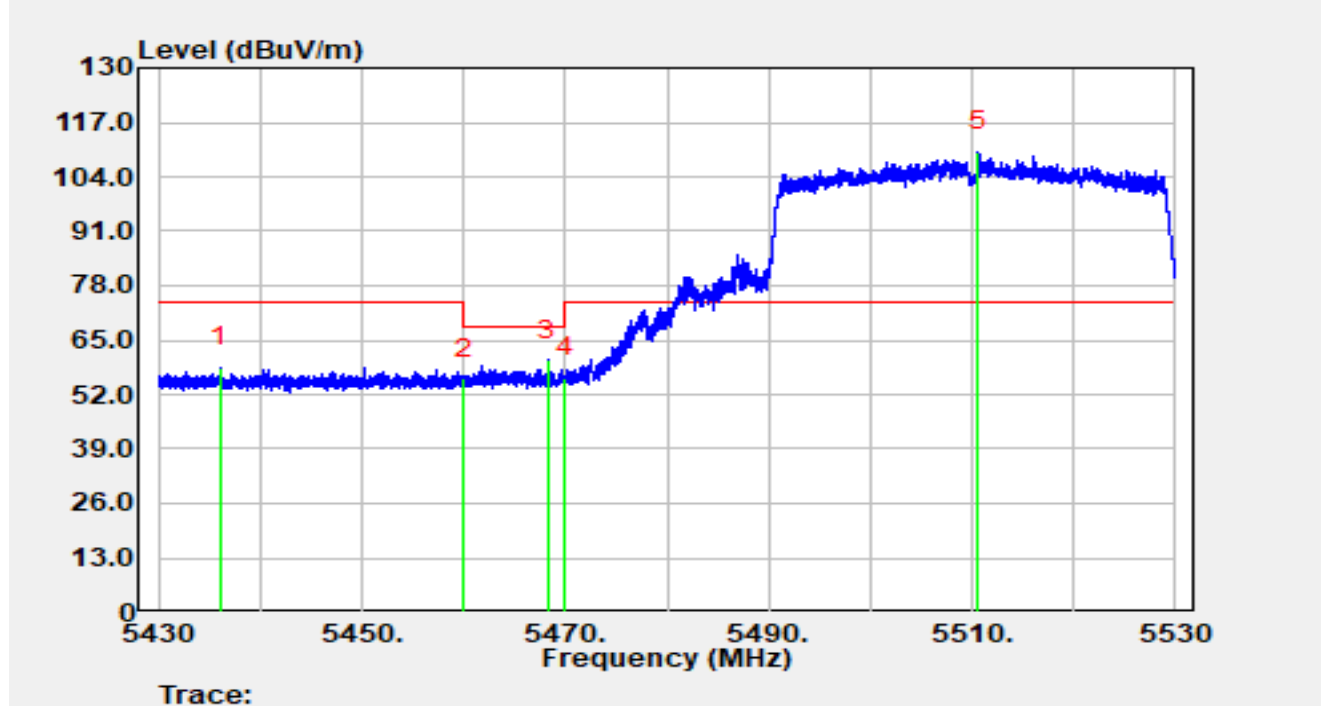


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.12	38.46	19.99	58.45	-15.55	74.00	Peak
2		5460.00	35.70	20.15	55.84	-12.36	68.20	Peak
3	*	5468.32	40.17	20.05	60.22	-7.98	68.20	Peak
4		5470.00	36.01	20.03	56.04	-12.16	68.20	Peak
5		5510.63	90.33	19.72	110.04	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5510MHz		

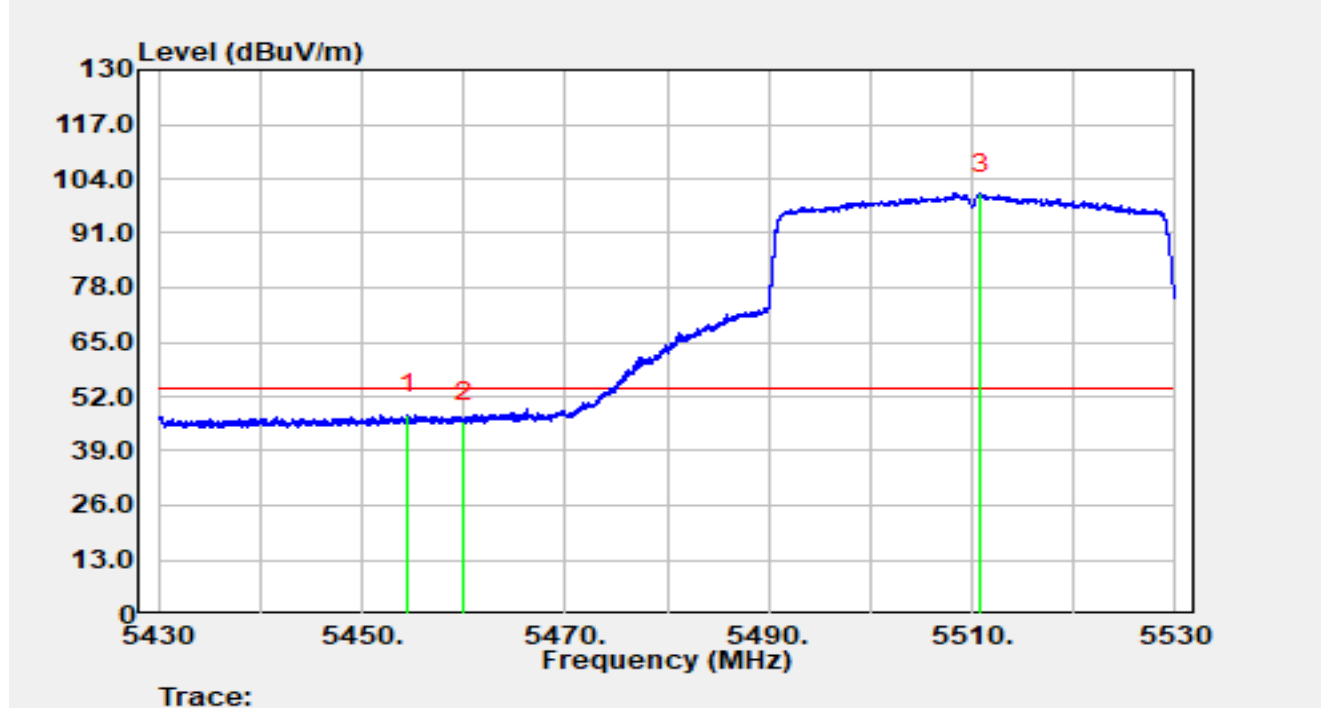


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.49	27.55	20.13	47.68	-6.32	54.00	Average
2		5460.00	25.81	20.15	45.96	-8.04	54.00	Average
3		5510.79	80.68	19.72	100.40	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5670MHz		

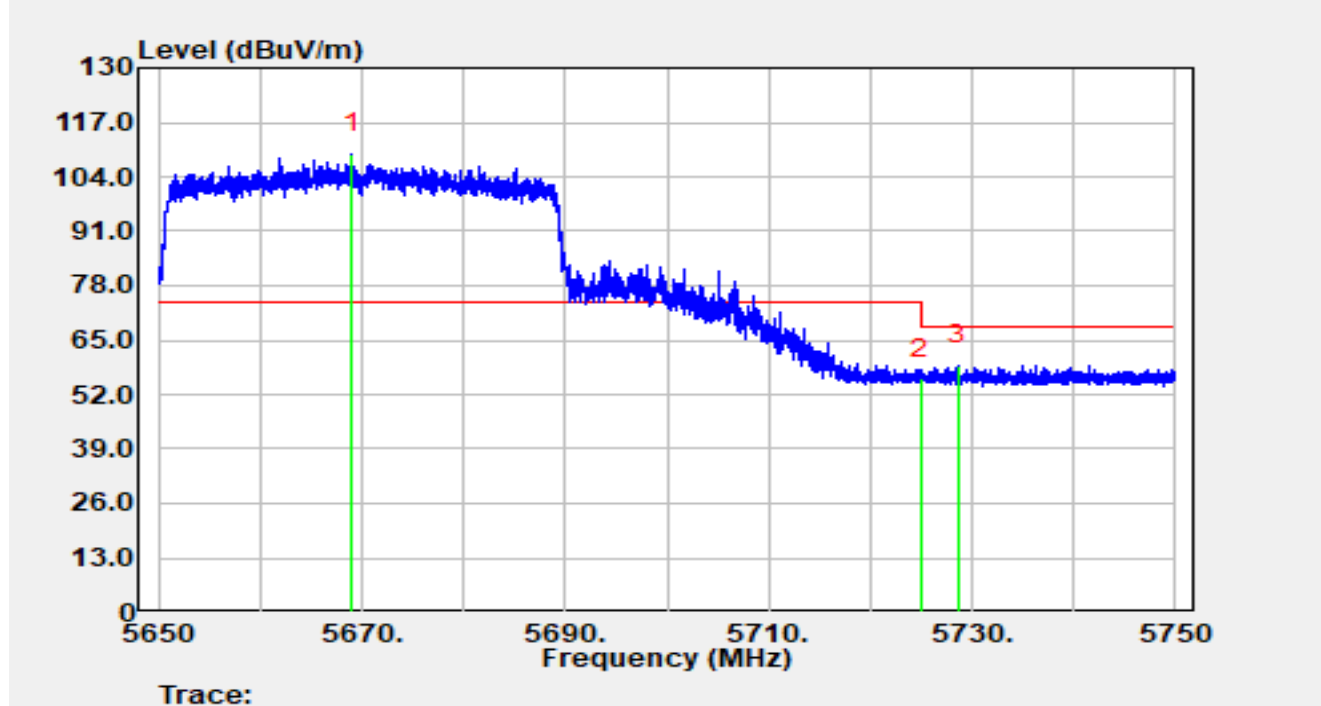


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5669.05	89.10	20.52	109.61	N/A	N/A	Peak
2		5725.00	34.36	21.34	55.70	-12.50	68.20	Peak
3	*	5728.57	37.62	21.32	58.95	-9.25	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5670MHz		

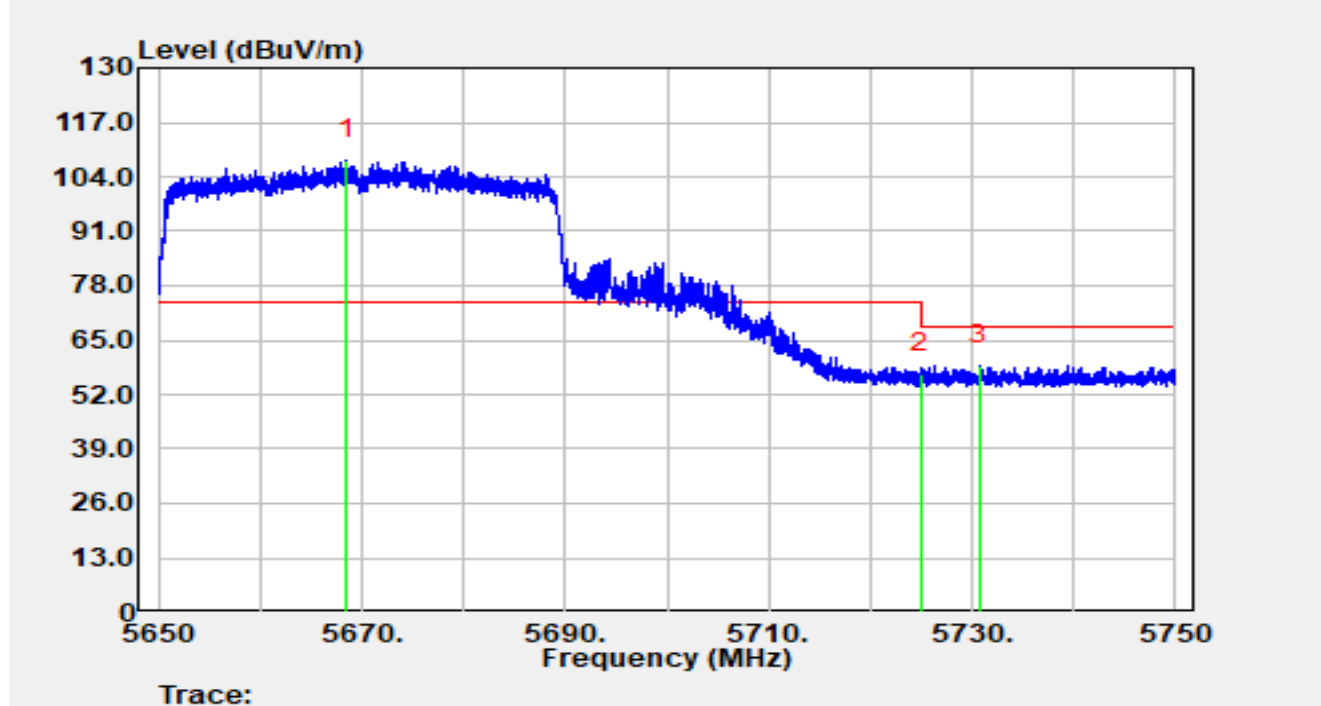


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5668.51	87.64	20.51	108.15	N/A	N/A	Peak
2		5725.00	35.81	21.34	57.15	-11.05	68.20	Peak
3	*	5730.78	37.63	21.31	58.94	-9.26	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5755MHz		

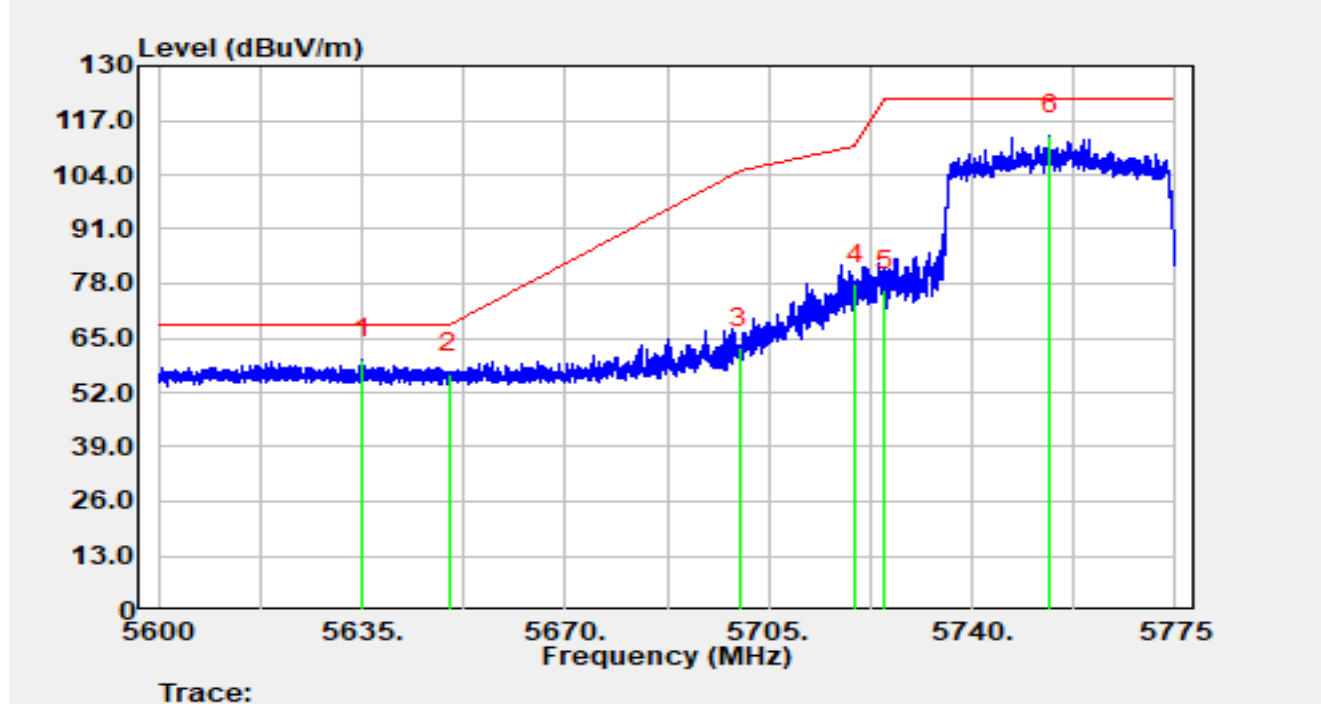


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5635.19	39.18	20.79	59.97	-8.23	68.20	Peak
2		5650.00	35.81	20.63	56.44	-11.76	68.20	Peak
3		5700.00	41.50	21.09	62.58	-42.62	105.20	Peak
4		5720.00	56.52	21.36	77.88	-32.92	110.80	Peak
5		5725.00	55.11	21.34	76.45	-45.75	122.20	Peak
6		5753.44	92.39	21.09	113.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5755MHz		

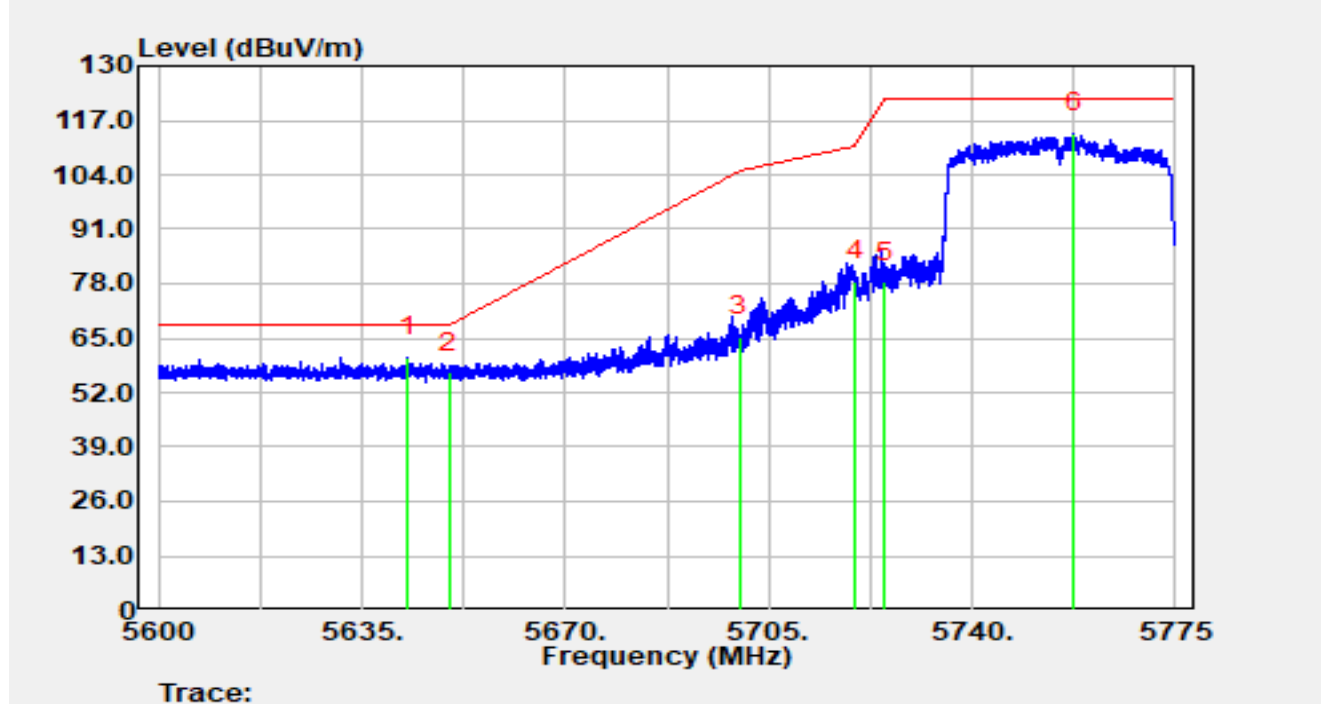


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.91	39.70	20.71	60.41	-7.79	68.20	Peak
2		5650.00	36.07	20.63	56.70	-11.50	68.20	Peak
3		5700.00	44.21	21.09	65.30	-39.90	105.20	Peak
4		5720.00	57.14	21.36	78.50	-32.30	110.80	Peak
5		5725.00	57.03	21.34	78.37	-43.83	122.20	Peak
6		5757.59	92.72	21.11	113.83	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5795MHz		

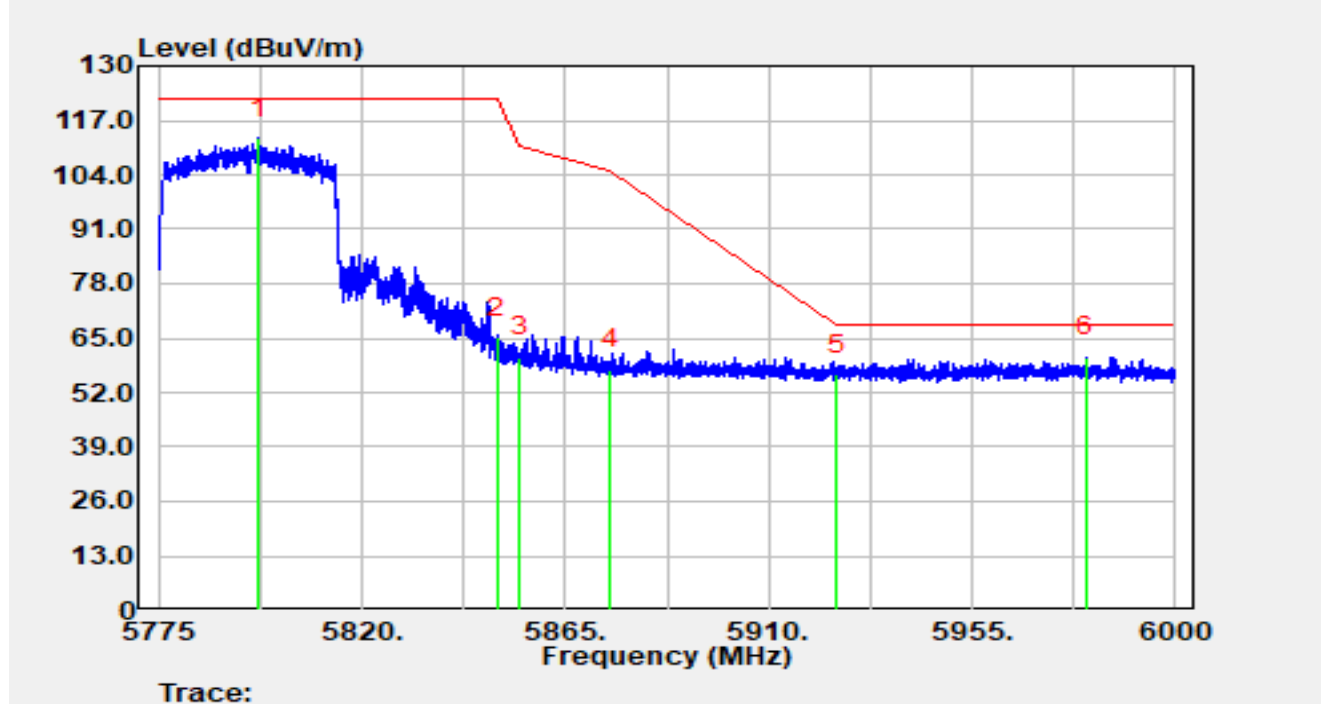


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5797.03	91.24	21.53	112.77	N/A	N/A	Peak
2		5850.00	43.80	21.33	65.14	-57.06	122.20	Peak
3		5855.00	39.03	21.33	60.36	-50.44	110.80	Peak
4		5875.00	36.04	21.59	57.63	-47.57	105.20	Peak
5		5925.00	34.84	21.49	56.33	-11.87	68.20	Peak
6	*	5980.16	38.50	21.98	60.48	-7.72	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE40 at 5795MHz		

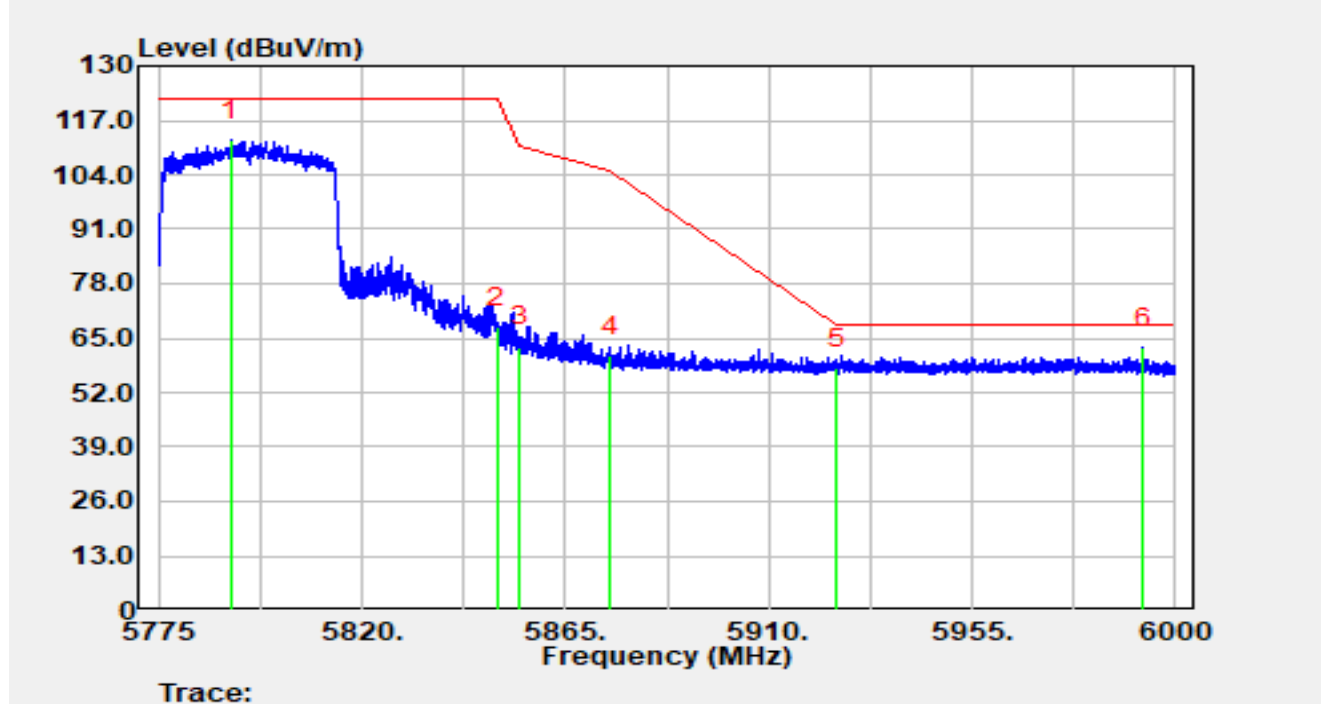


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.07	90.80	21.47	112.27	N/A	N/A	Peak
2		5850.00	46.25	21.33	67.58	-54.62	122.20	Peak
3		5855.00	41.69	21.33	63.01	-47.79	110.80	Peak
4		5875.00	39.09	21.59	60.68	-44.52	105.20	Peak
5		5925.00	36.33	21.49	57.82	-10.38	68.20	Peak
6	*	5992.94	40.74	21.91	62.65	-5.55	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

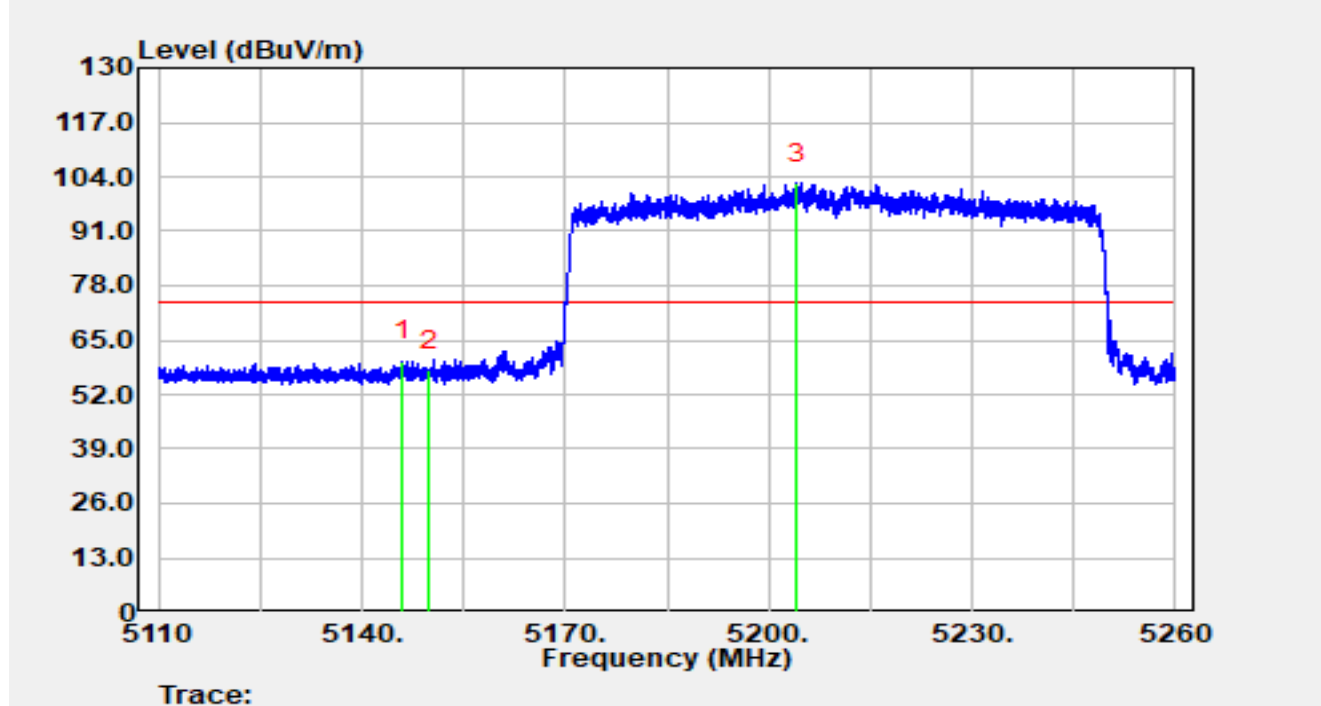


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.94	40.50	19.44	59.94	-14.06	74.00	Peak
2		5150.00	38.43	19.43	57.86	-16.14	74.00	Peak
3		5204.17	82.73	19.64	102.38	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

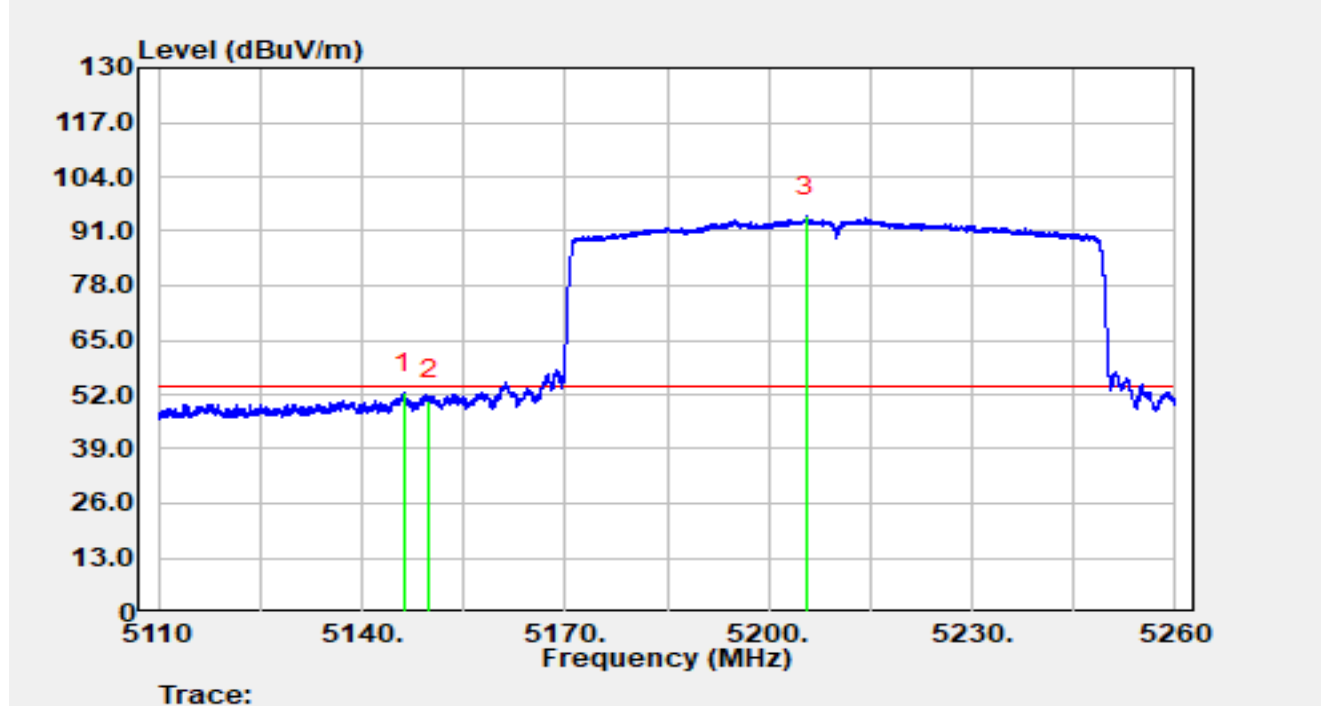


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.23	32.86	19.44	52.30	-1.70	54.00	Average
2		5150.00	31.24	19.43	50.67	-3.33	54.00	Average
3		5205.52	74.82	19.62	94.44	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

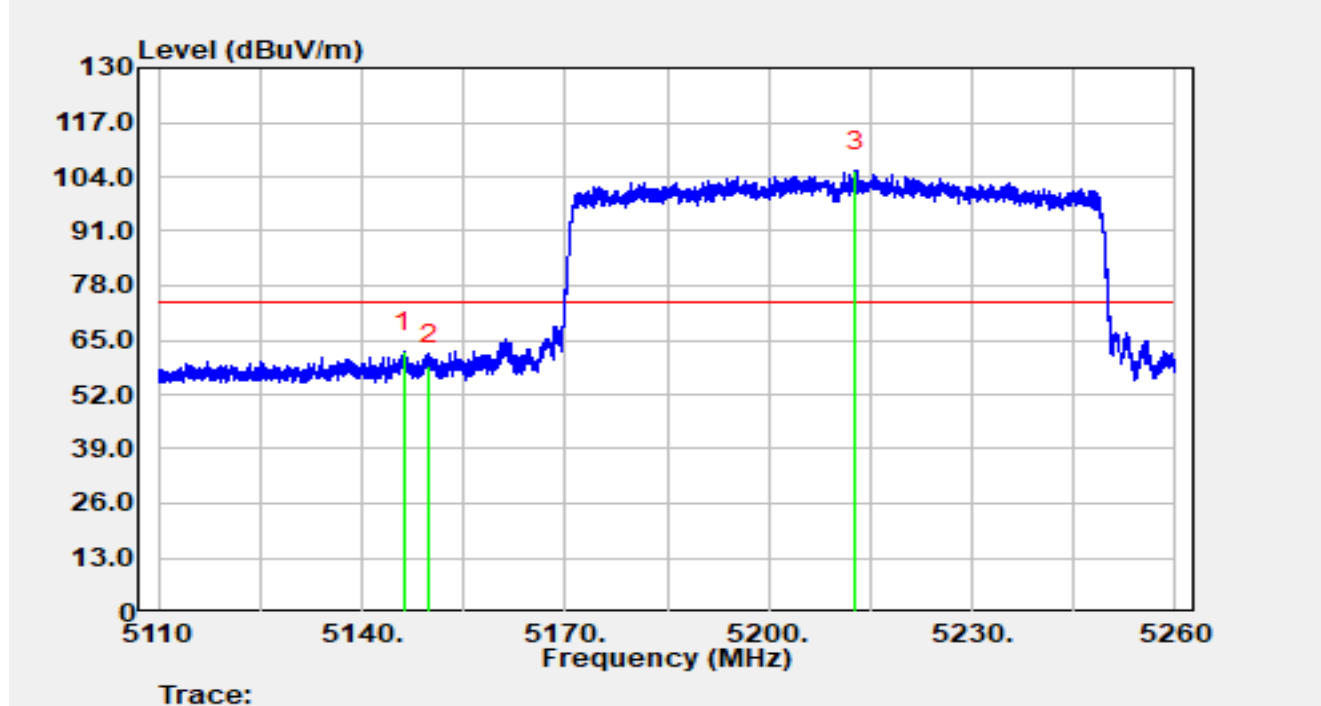


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.17	42.70	19.44	62.13	-11.87	74.00	Peak
2		5150.00	39.54	19.43	58.97	-15.03	74.00	Peak
3		5212.89	85.93	19.45	105.37	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5210MHz		

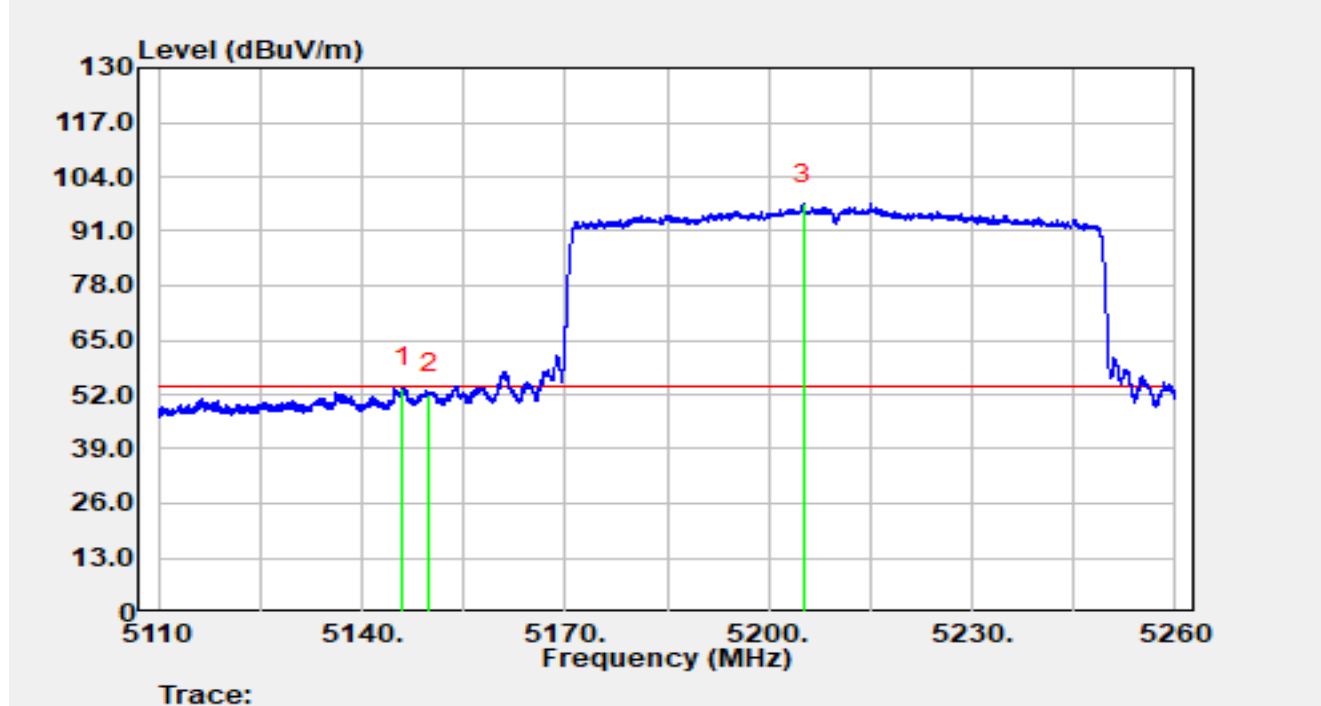


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.08	34.24	19.44	53.67	-0.33	54.00	Average
2		5150.00	32.74	19.43	52.18	-1.82	54.00	Average
3		5205.07	77.83	19.62	97.45	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

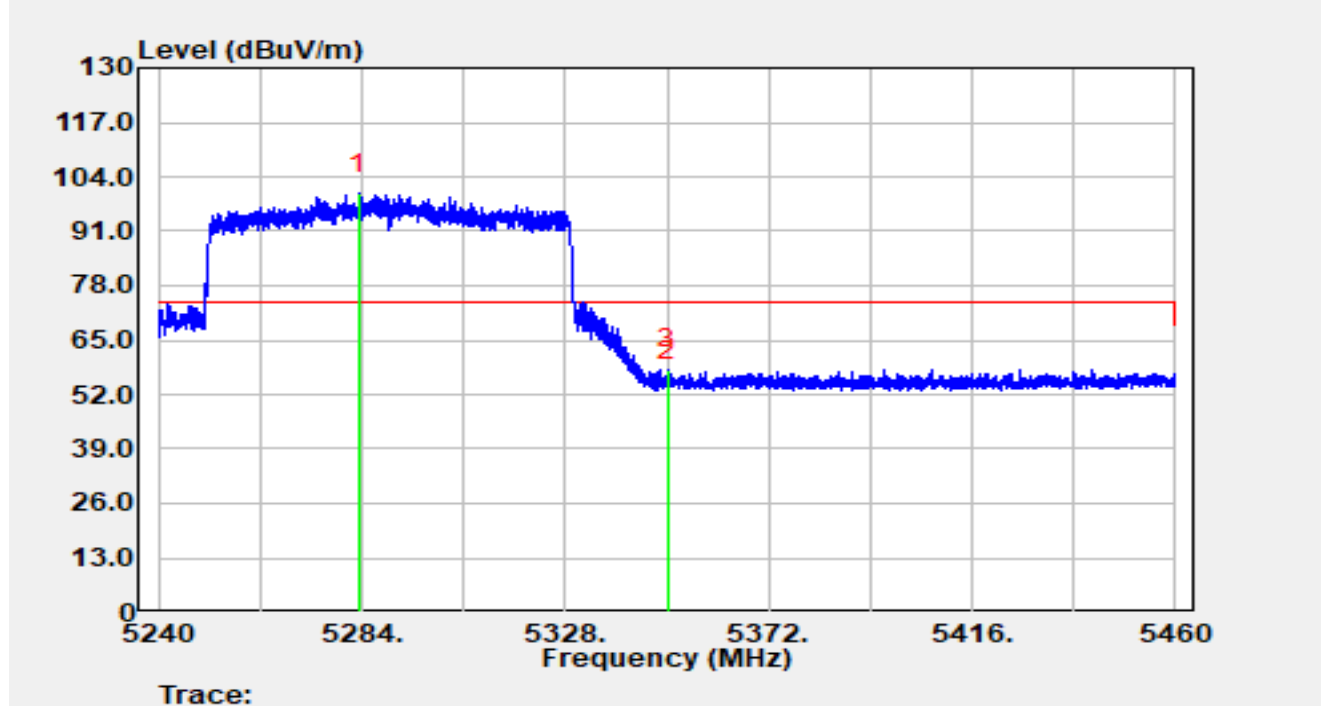


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5283.38	80.28	19.73	100.02	N/A	N/A	Peak
2		5350.00	35.13	19.85	54.98	-19.02	74.00	Peak
3	*	5350.24	38.28	19.85	58.13	-15.87	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

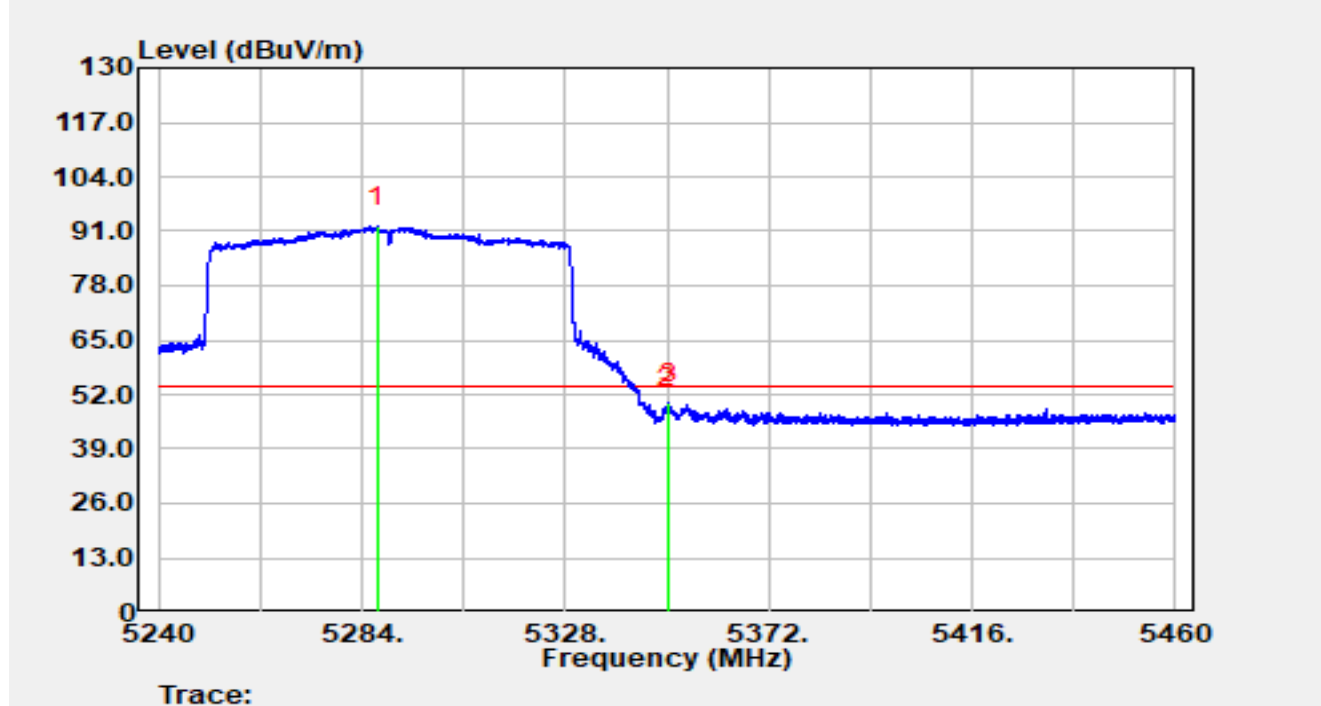


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5287.23	72.43	19.74	92.17	N/A	N/A	Average
2		5350.00	28.91	19.85	48.76	-5.24	54.00	Average
3	*	5350.51	29.94	19.86	49.80	-4.20	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

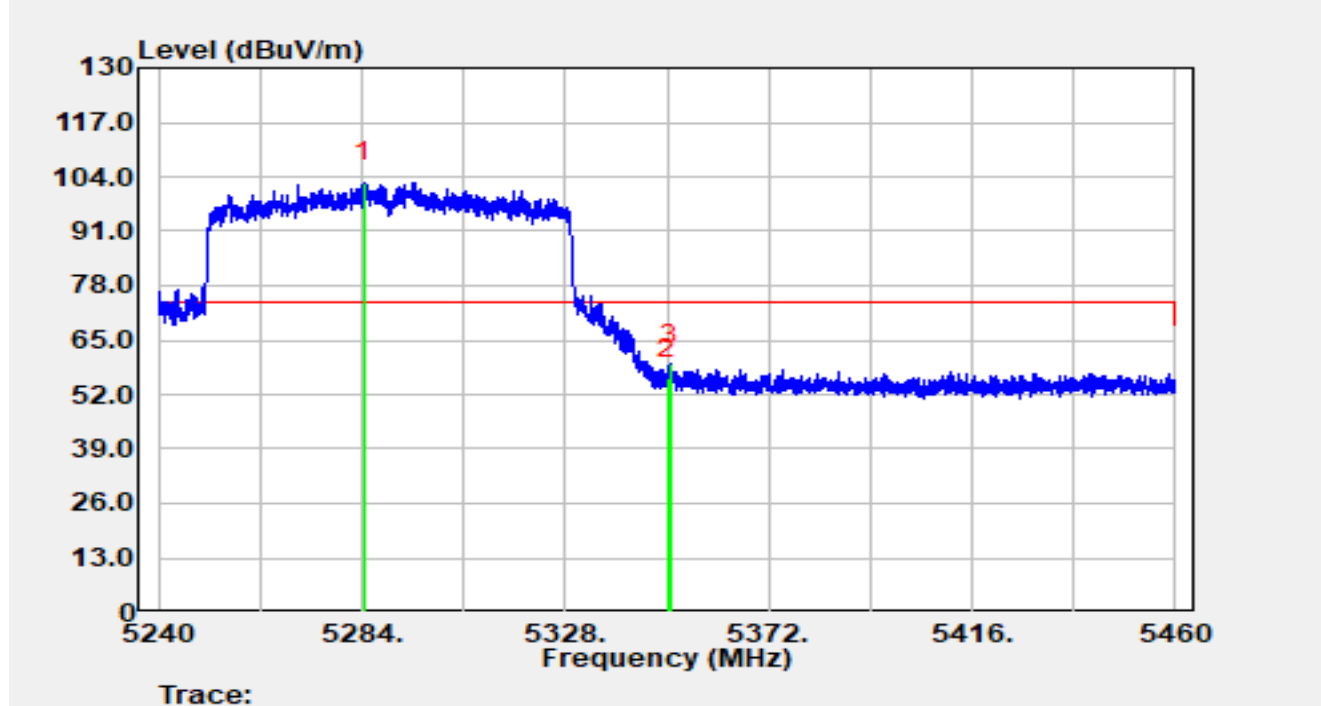


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5284.35	83.01	19.73	102.74	N/A	N/A	Peak
2		5350.00	35.89	19.85	55.75	-18.25	74.00	Peak
3	*	5350.59	39.34	19.86	59.19	-14.81	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5290MHz		

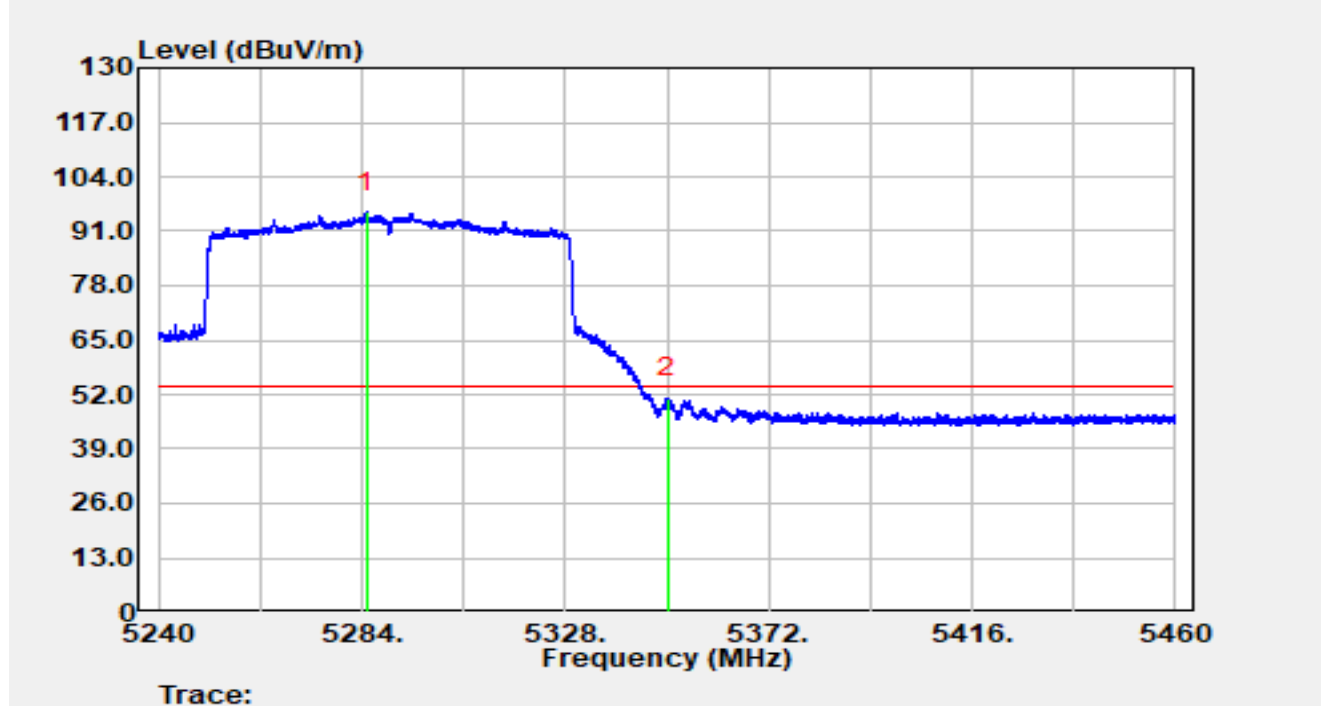


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5284.90	75.71	19.73	95.44	N/A	N/A	Average
2	*	5350.00	31.21	19.85	51.06	-2.94	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

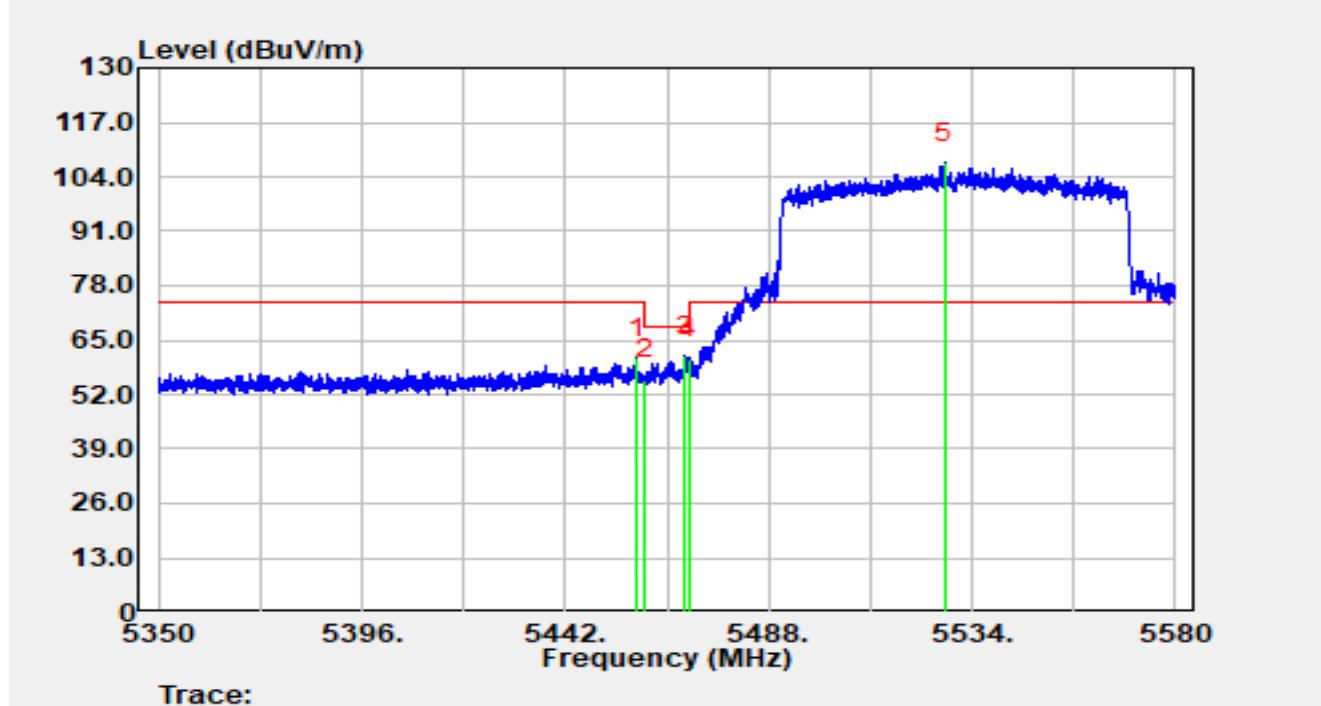


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.26	40.67	20.14	60.81	-13.19	74.00	Peak
2		5460.00	35.35	20.15	55.50	-12.70	68.20	Peak
3	*	5468.96	41.05	20.05	61.10	-7.10	68.20	Peak
4		5470.00	40.35	20.03	60.38	-7.82	68.20	Peak
5		5527.72	87.27	20.08	107.35	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

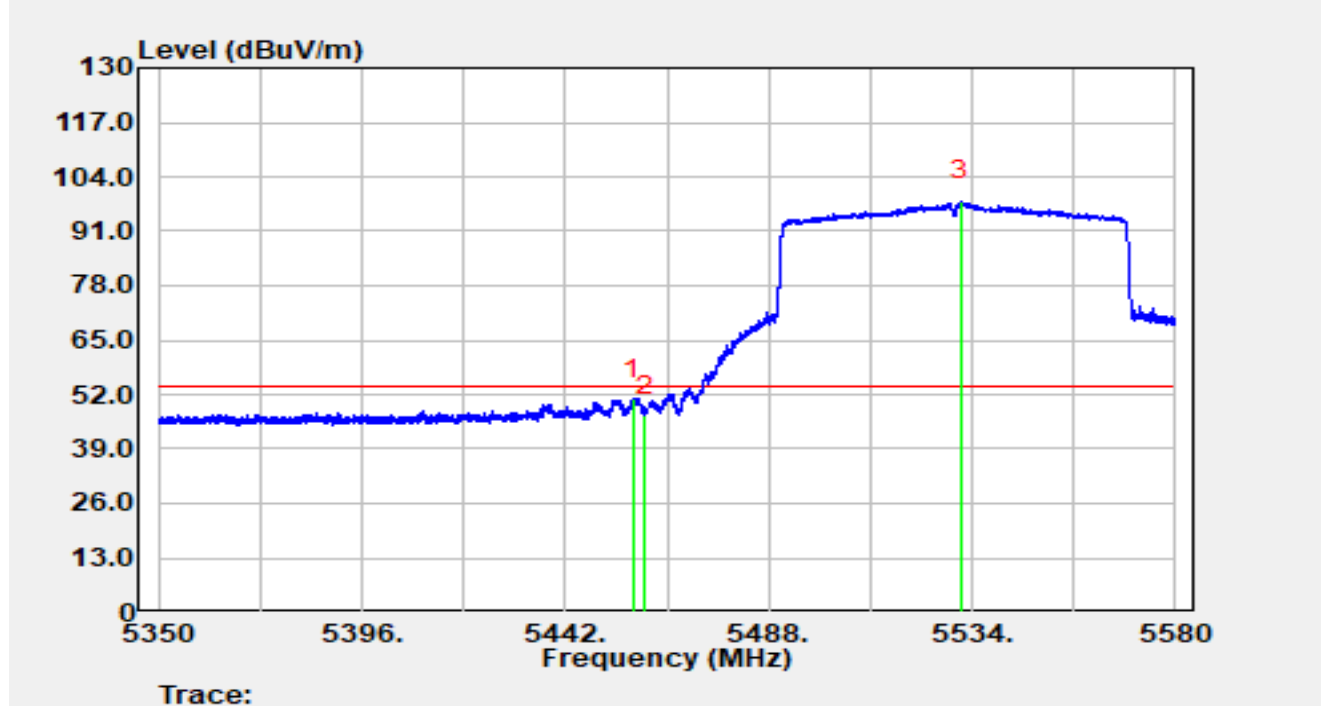


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.27	30.72	20.14	50.86	-3.14	54.00	Average
2		5460.00	26.84	20.15	46.98	-7.02	54.00	Average
3		5531.38	78.16	20.15	98.31	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

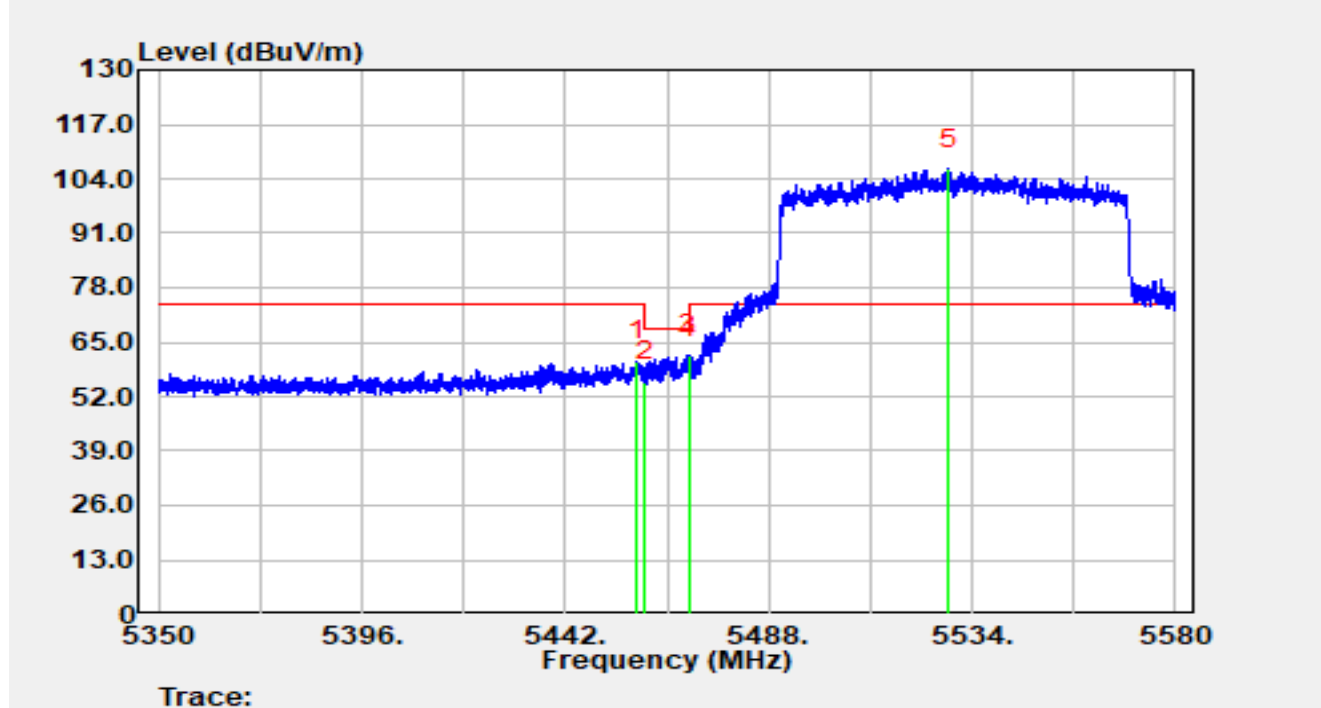


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.15	40.26	20.14	60.40	-13.60	74.00	Peak
2		5460.00	35.50	20.15	55.64	-12.56	68.20	Peak
3	*	5469.83	41.91	20.03	61.94	-6.26	68.20	Peak
4		5470.00	41.06	20.03	61.09	-7.11	68.20	Peak
5		5528.76	86.21	20.10	106.31	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5530MHz		

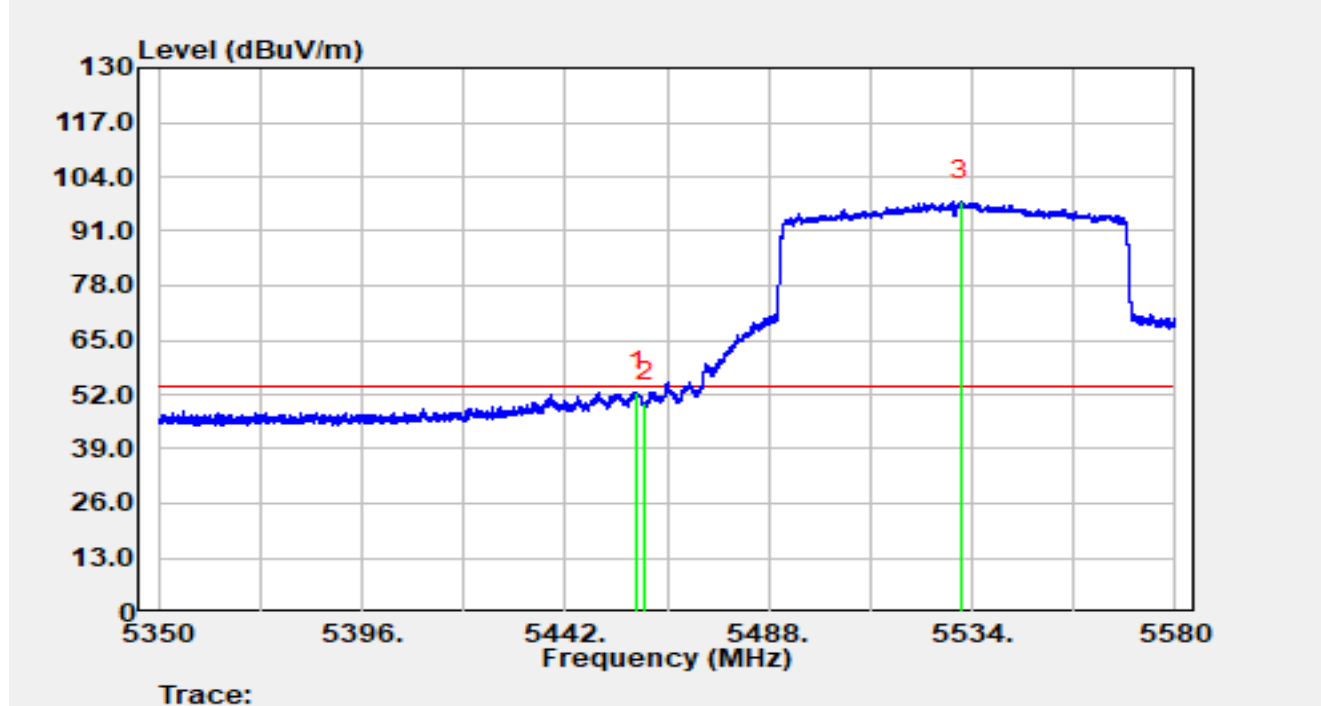


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.24	32.50	20.14	52.64	-1.36	54.00	Average
2		5460.00	30.00	20.15	50.14	-3.86	54.00	Average
3		5531.47	78.01	20.15	98.16	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5610MHz		

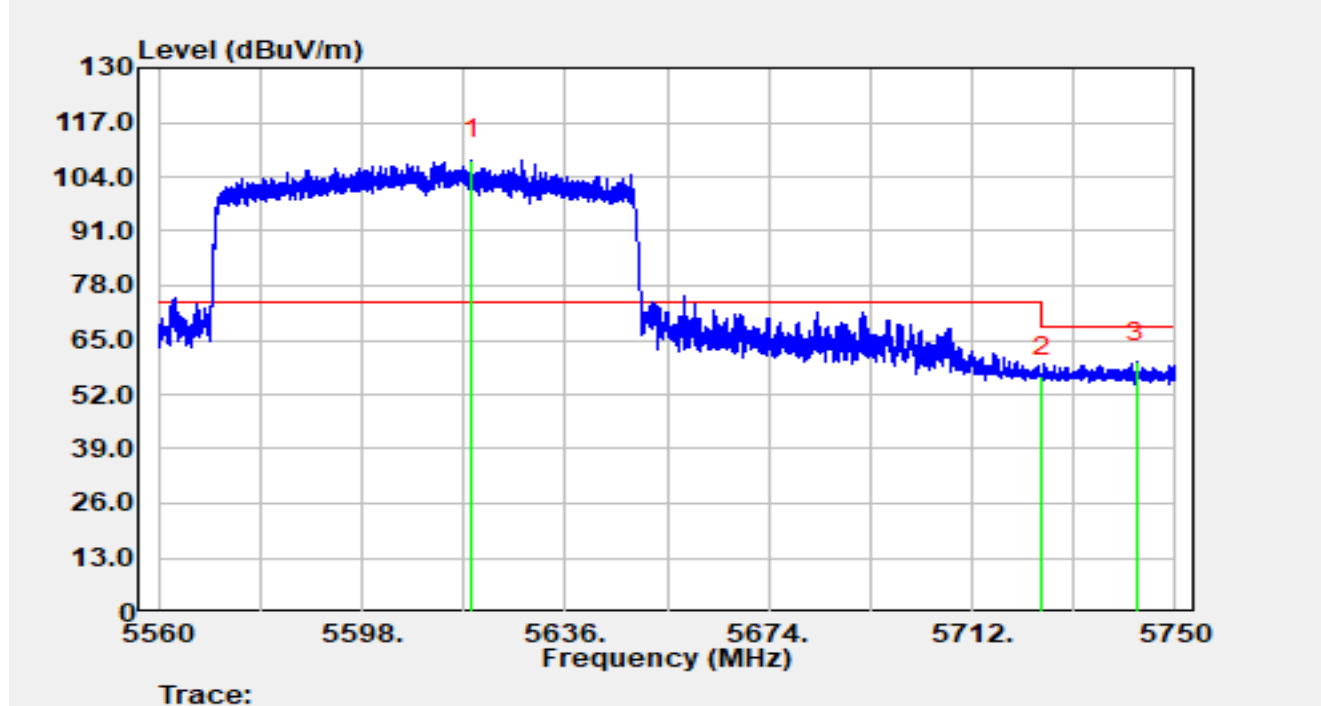


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5618.60	87.44	20.72	108.15	N/A	N/A	Peak
2		5725.00	35.05	21.34	56.39	-17.61	74.00	Peak
3	*	5742.84	38.44	21.22	59.66	-8.54	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5610MHz		

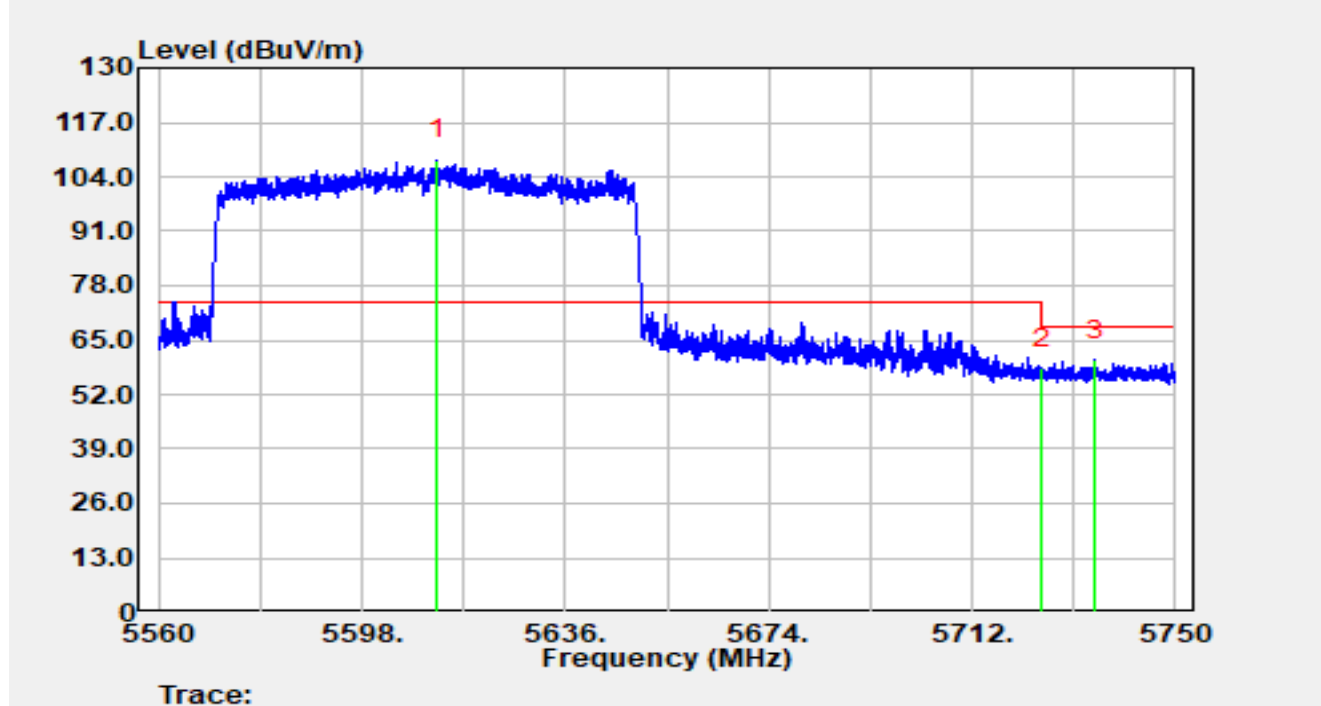


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5612.04	87.32	20.61	107.93	N/A	N/A	Peak
2		5725.00	36.87	21.34	58.21	-15.79	74.00	Peak
3	*	5734.99	38.87	21.29	60.16	-8.04	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (1) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5775MHz		

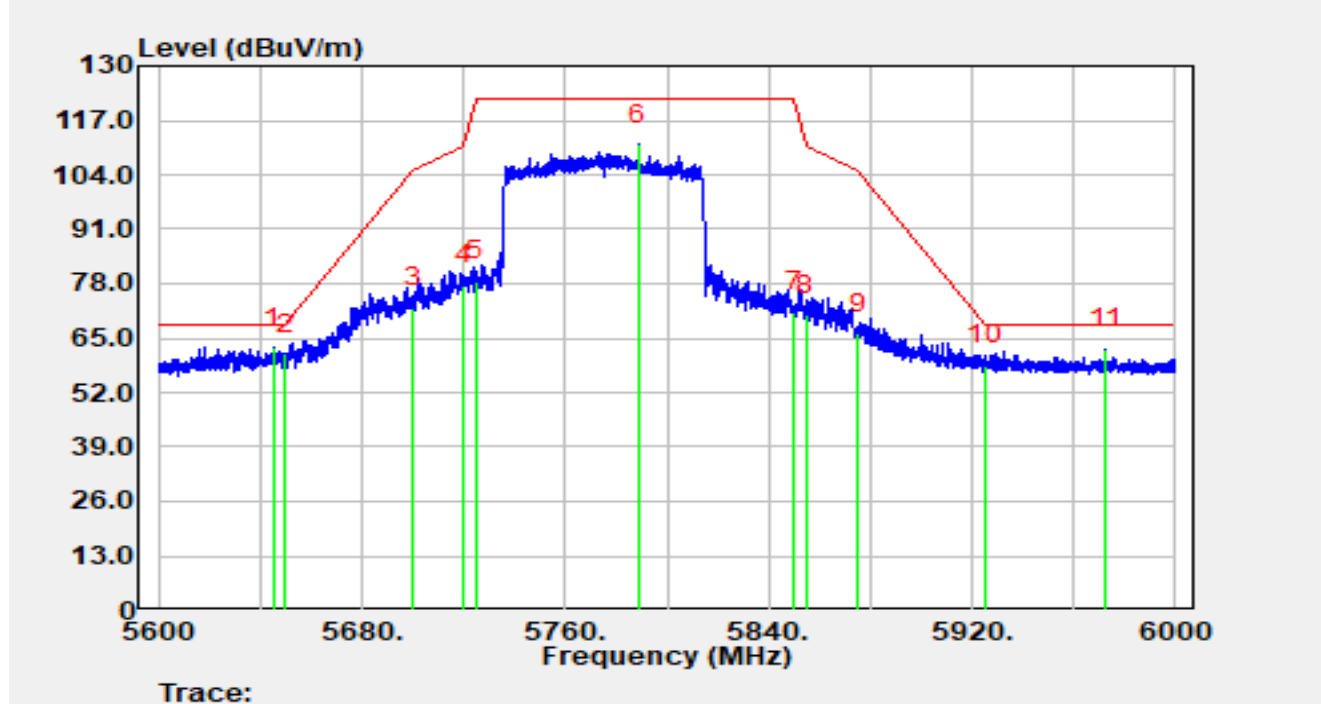

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.28	42.00	20.68	62.68	-5.52	68.20	Peak
2		5650.00	40.54	20.63	61.17	-7.03	68.20	Peak
3		5700.00	51.23	21.09	72.31	-32.89	105.20	Peak
4		5720.00	56.34	21.36	77.70	-33.10	110.80	Peak
5		5725.00	57.19	21.34	78.53	-43.67	122.20	Peak
6		5788.84	89.68	21.45	111.13	N/A	N/A	Peak
7		5850.00	49.95	21.33	71.29	-50.91	122.20	Peak
8		5855.00	49.08	21.33	70.41	-40.39	110.80	Peak
9		5875.00	44.42	21.59	66.01	-39.19	105.20	Peak
10		5925.00	37.05	21.49	58.54	-9.66	68.20	Peak
11		5972.48	40.51	21.92	62.43	-5.77	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

4.The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5.8G_RE (3m)-PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE80 at 5775MHz		

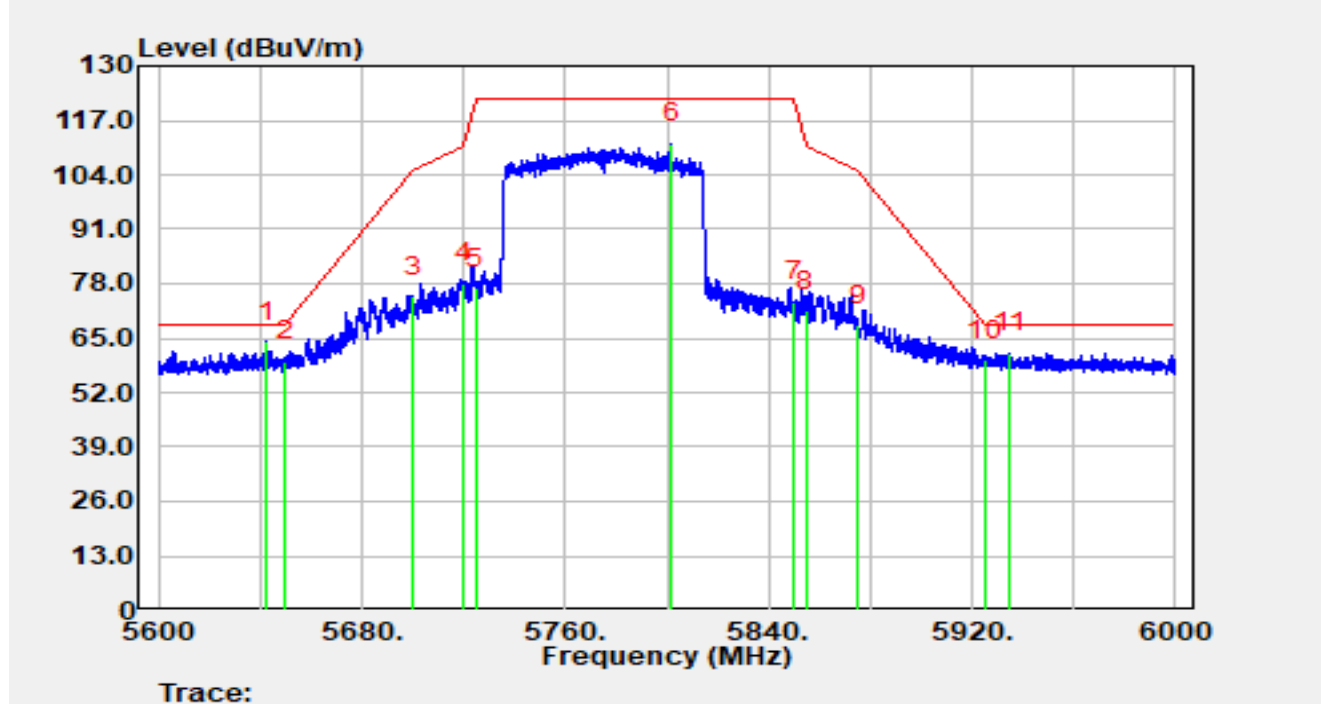

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.68	43.38	20.71	64.09	-4.11	68.20	Peak
2		5650.00	38.83	20.63	59.46	-8.74	68.20	Peak
3		5700.00	53.84	21.09	74.92	-30.28	105.20	Peak
4		5720.00	56.76	21.36	78.12	-32.68	110.80	Peak
5		5725.00	55.50	21.34	76.84	-45.36	122.20	Peak
6		5801.88	89.92	21.59	111.51	N/A	N/A	Peak
7		5850.00	52.37	21.33	73.70	-48.50	122.20	Peak
8		5855.00	50.24	21.33	71.57	-39.23	110.80	Peak
9		5875.00	46.47	21.59	68.06	-37.14	105.20	Peak
10		5925.00	38.24	21.49	59.73	-8.47	68.20	Peak
11		5934.76	40.00	21.47	61.47	-6.73	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

4.The point (6) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

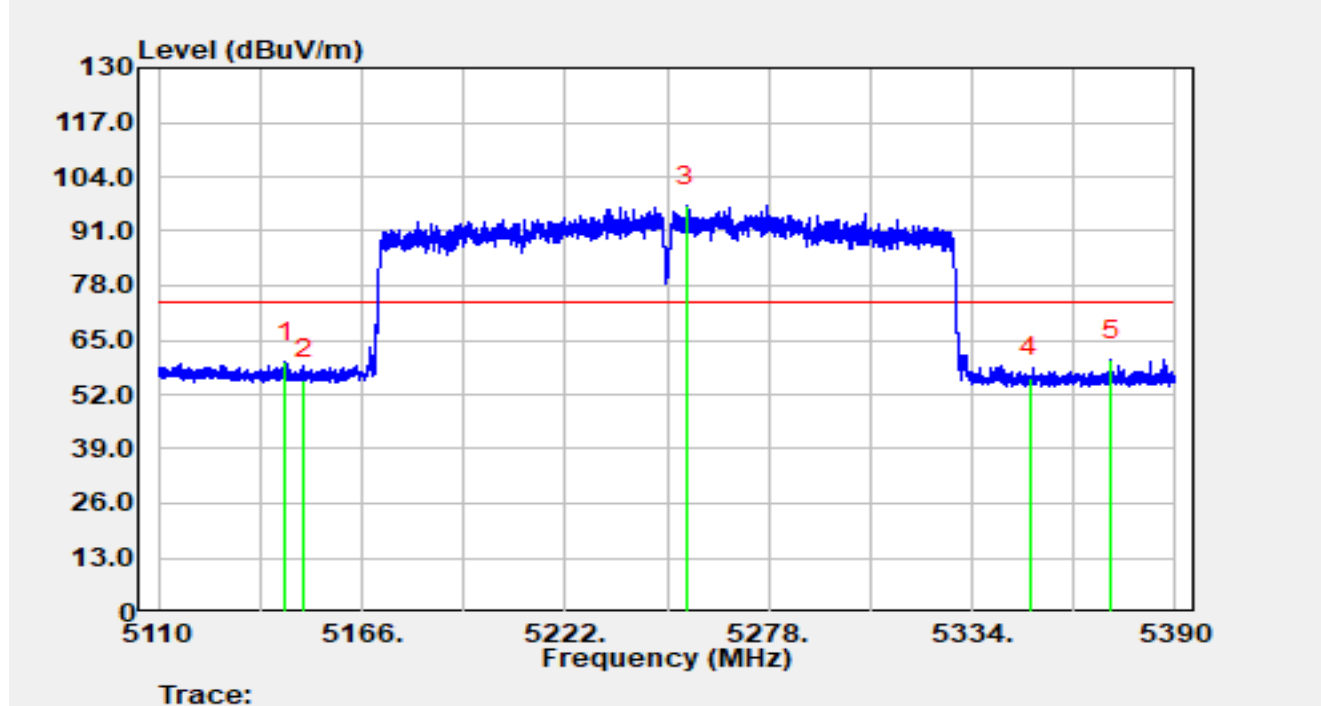


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5144.92	40.17	19.44	59.61	-14.39	74.00	Peak
2		5150.00	36.10	19.43	55.53	-18.47	74.00	Peak
3		5255.38	77.65	19.41	97.06	N/A	N/A	Peak
4		5350.00	36.14	19.85	55.99	-18.01	74.00	Peak
5	*	5372.16	40.22	19.92	60.14	-13.86	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

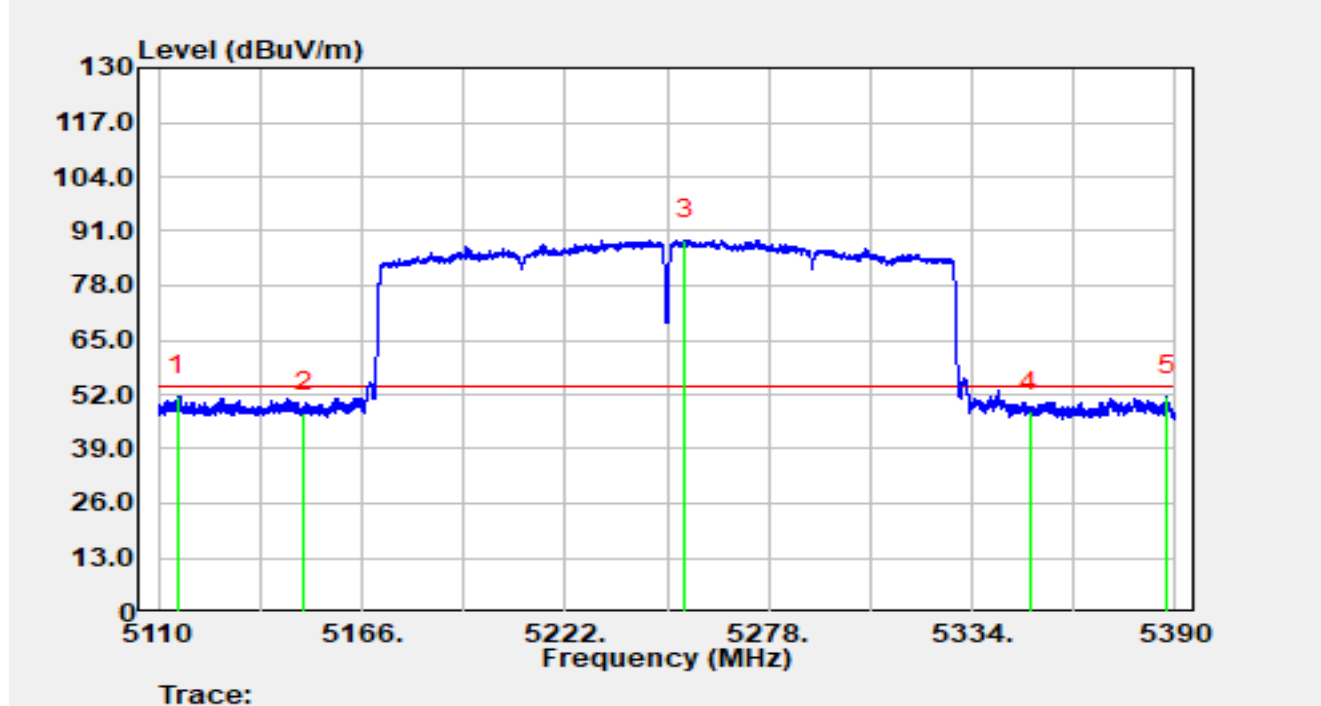


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5115.24	31.89	19.77	51.66	-2.34	54.00	Average
2		5150.00	28.33	19.43	47.76	-6.24	54.00	Average
3		5255.01	69.61	19.41	89.02	N/A	N/A	Average
4		5350.00	28.19	19.85	48.05	-5.95	54.00	Average
5		5387.59	31.66	19.91	51.57	-2.43	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

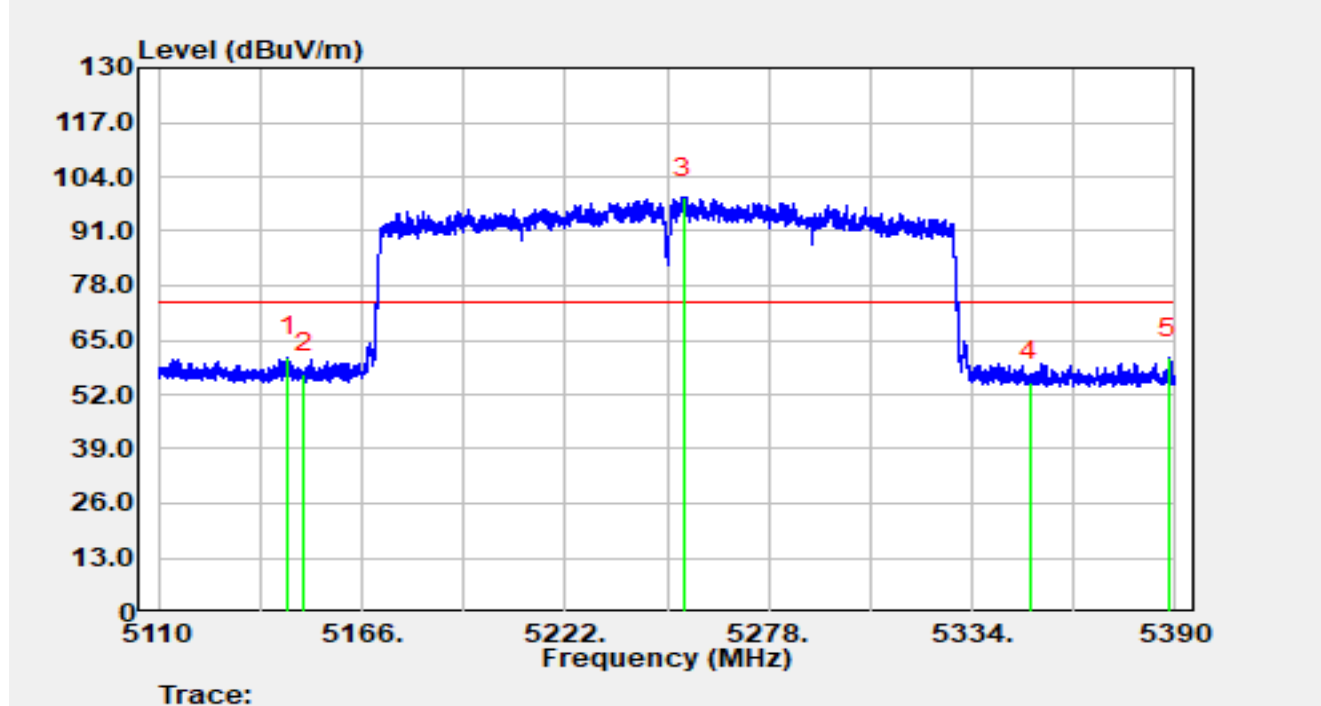


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.78	41.63	19.44	61.06	-12.94	74.00	Peak
2		5150.00	37.54	19.43	56.97	-17.03	74.00	Peak
3		5254.65	79.67	19.40	99.07	N/A	N/A	Peak
4		5350.00	35.16	19.85	55.02	-18.98	74.00	Peak
5		5388.15	40.82	19.91	60.73	-13.27	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5250MHz		

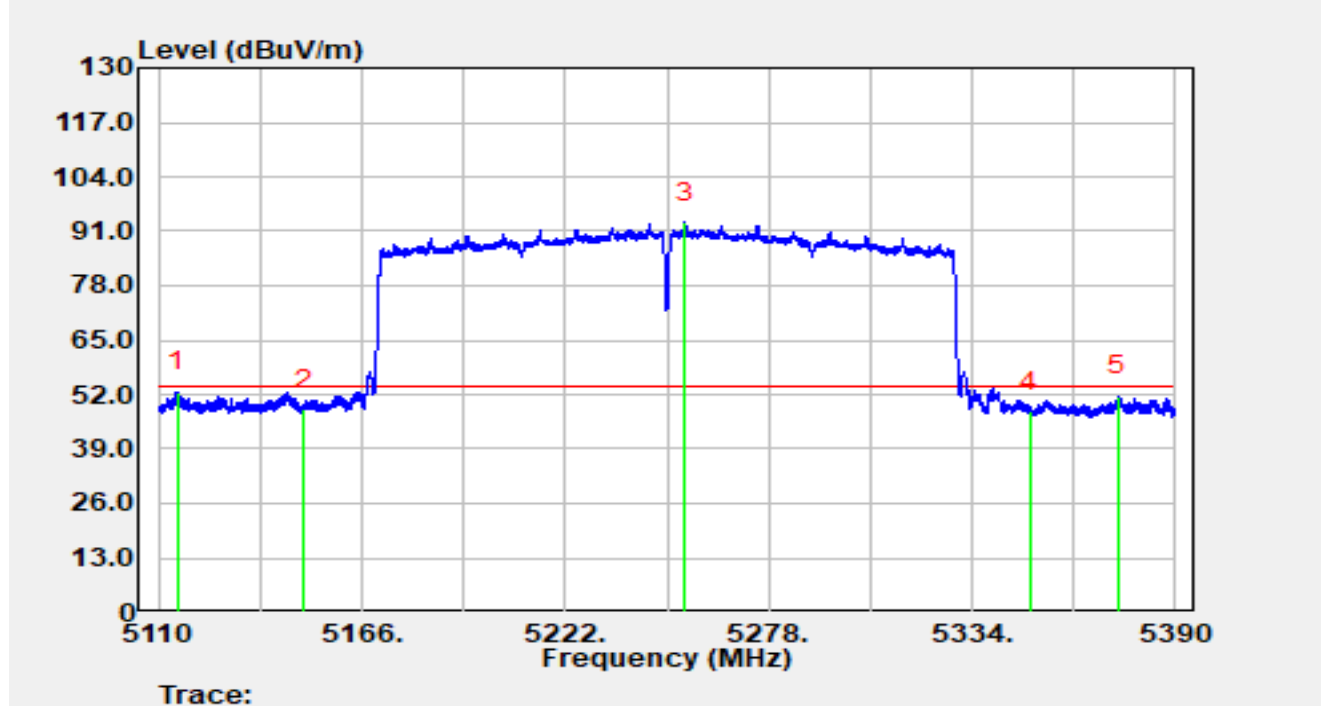


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5115.24	32.73	19.77	52.50	-1.50	54.00	Average
2		5150.00	28.91	19.43	48.34	-5.66	54.00	Average
3		5255.01	73.75	19.41	93.16	N/A	N/A	Average
4		5350.00	28.15	19.85	48.00	-6.00	54.00	Average
5		5374.15	31.67	19.93	51.60	-2.40	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

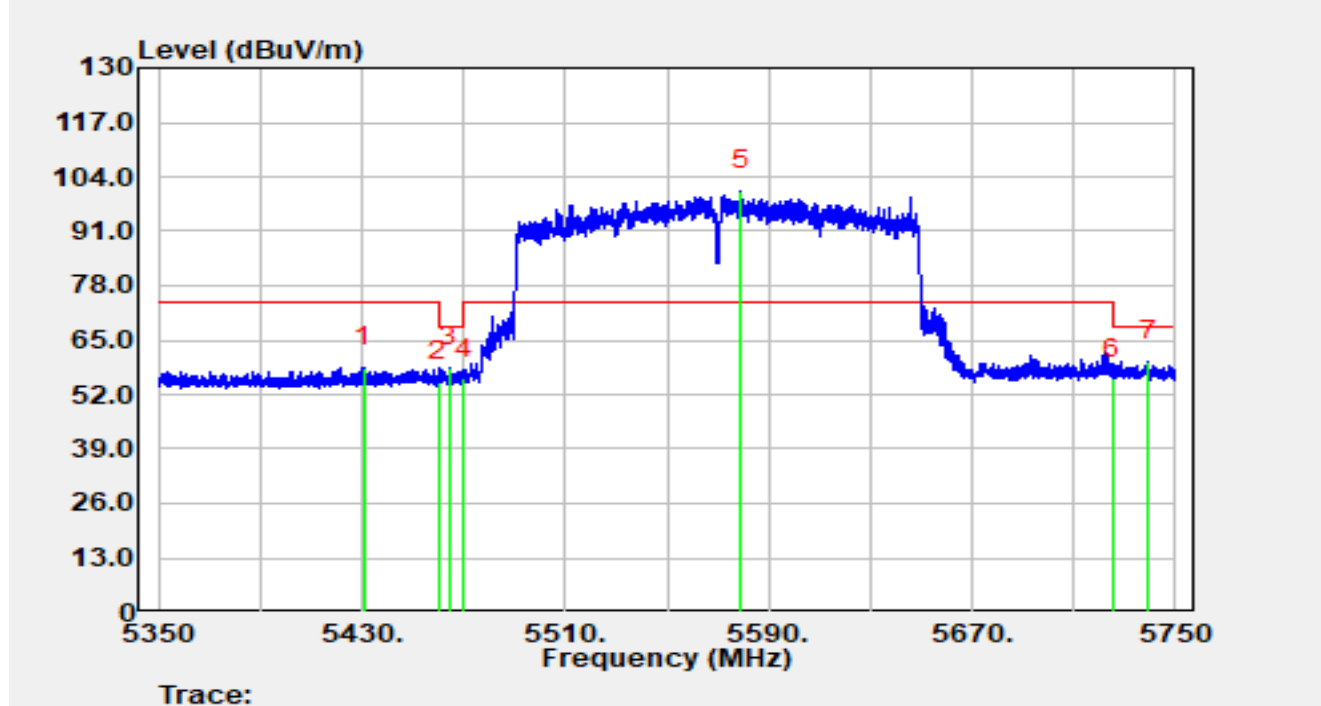


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5430.56	38.69	19.92	58.61	-15.39	74.00	Peak
2		5460.00	34.97	20.15	55.12	-13.08	68.20	Peak
3		5464.36	38.30	20.11	58.41	-9.79	68.20	Peak
4		5470.00	35.79	20.03	55.82	-12.38	68.20	Peak
5		5579.20	80.56	20.09	100.65	N/A	N/A	Peak
6		5725.00	34.47	21.34	55.81	-12.39	68.20	Peak
7	*	5739.20	38.65	21.25	59.90	-8.30	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

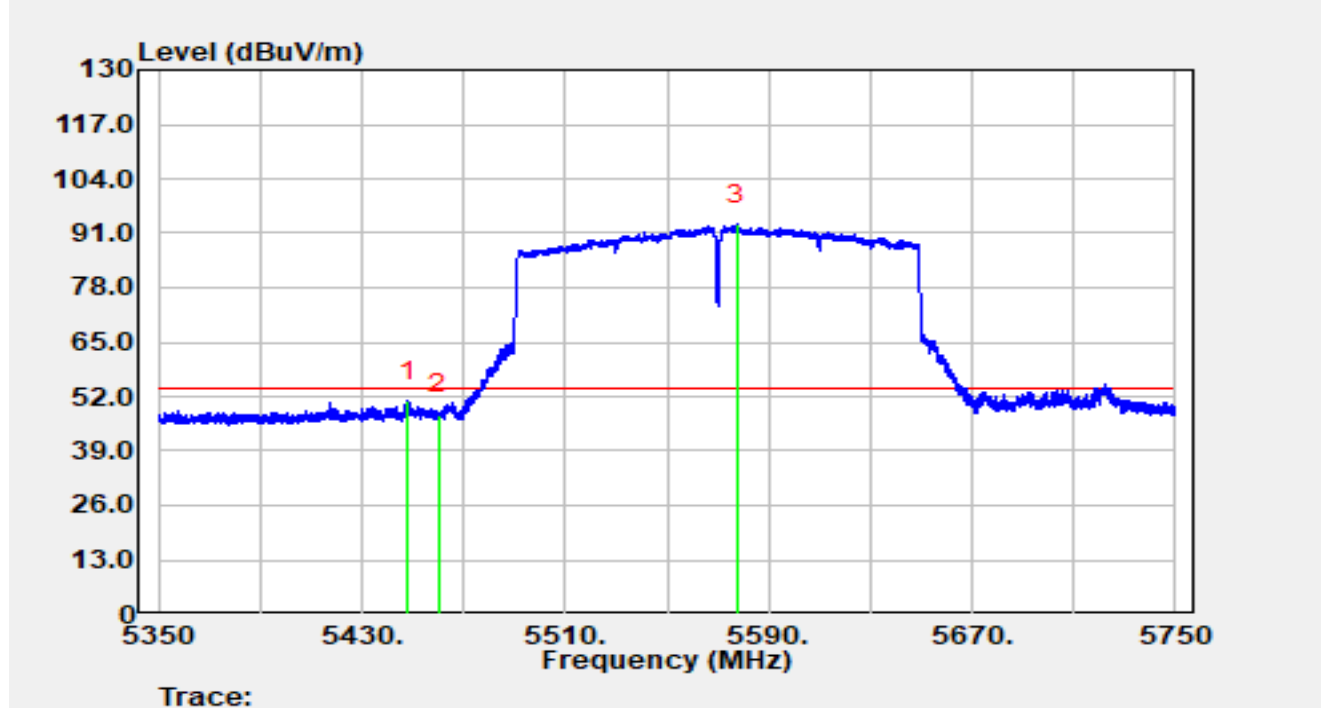


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.96	30.80	20.11	50.91	-3.09	54.00	Average
2		5460.00	27.45	20.15	47.60	-6.40	54.00	Average
3		5577.44	72.97	20.10	93.07	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

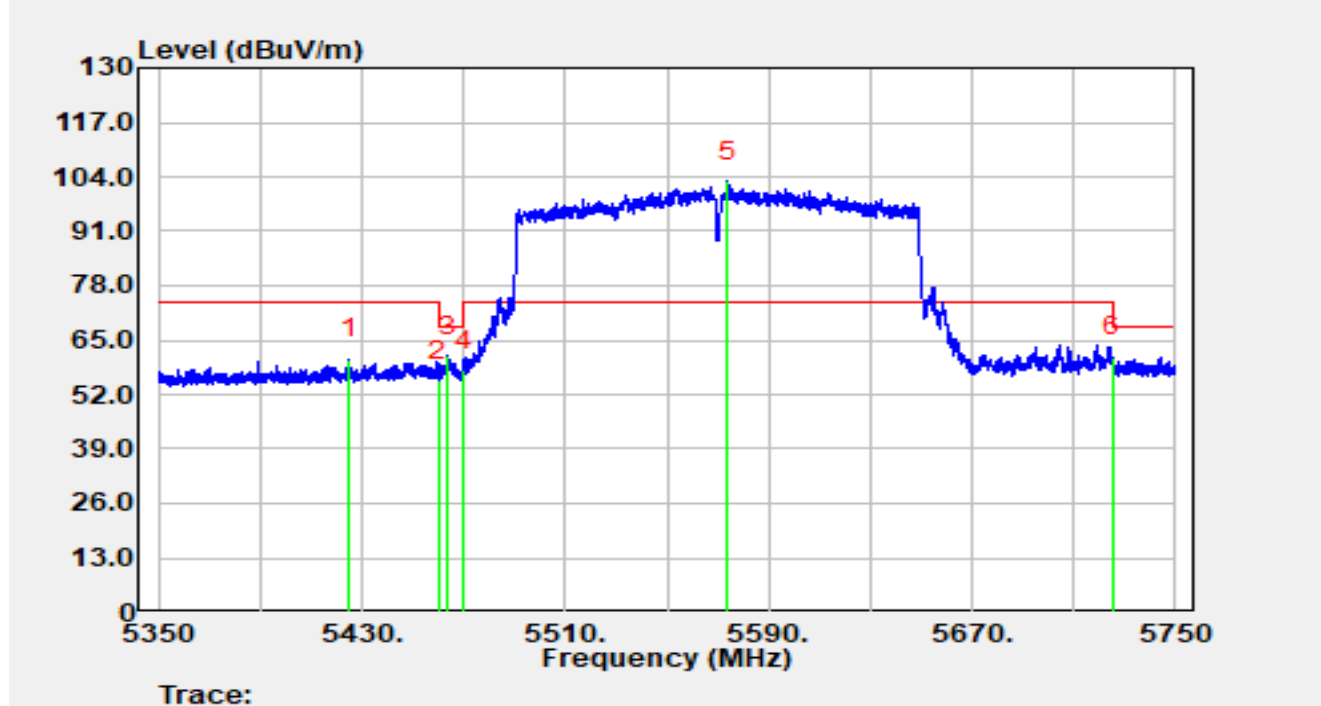


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5425.16	40.50	19.87	60.37	-13.63	74.00	Peak
2		5460.00	35.09	20.15	55.24	-12.96	68.20	Peak
3	*	5463.92	41.10	20.11	61.21	-6.99	68.20	Peak
4		5470.00	37.64	20.03	57.67	-10.53	68.20	Peak
5		5573.80	82.67	20.11	102.78	N/A	N/A	Peak
6		5725.00	39.56	21.34	60.90	-7.30	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The point (5) is Wi-Fi fundamental frequency that is not evaluated in this item.

Site	WZ-AC2	Test Date	2025-06-10
Temperature	29.9 °C	Humidity	38.5 %
Limit	FCC_5G_RE (3m)	Test Engineer	Lucas Wang
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ax-HE160 at 5570MHz		

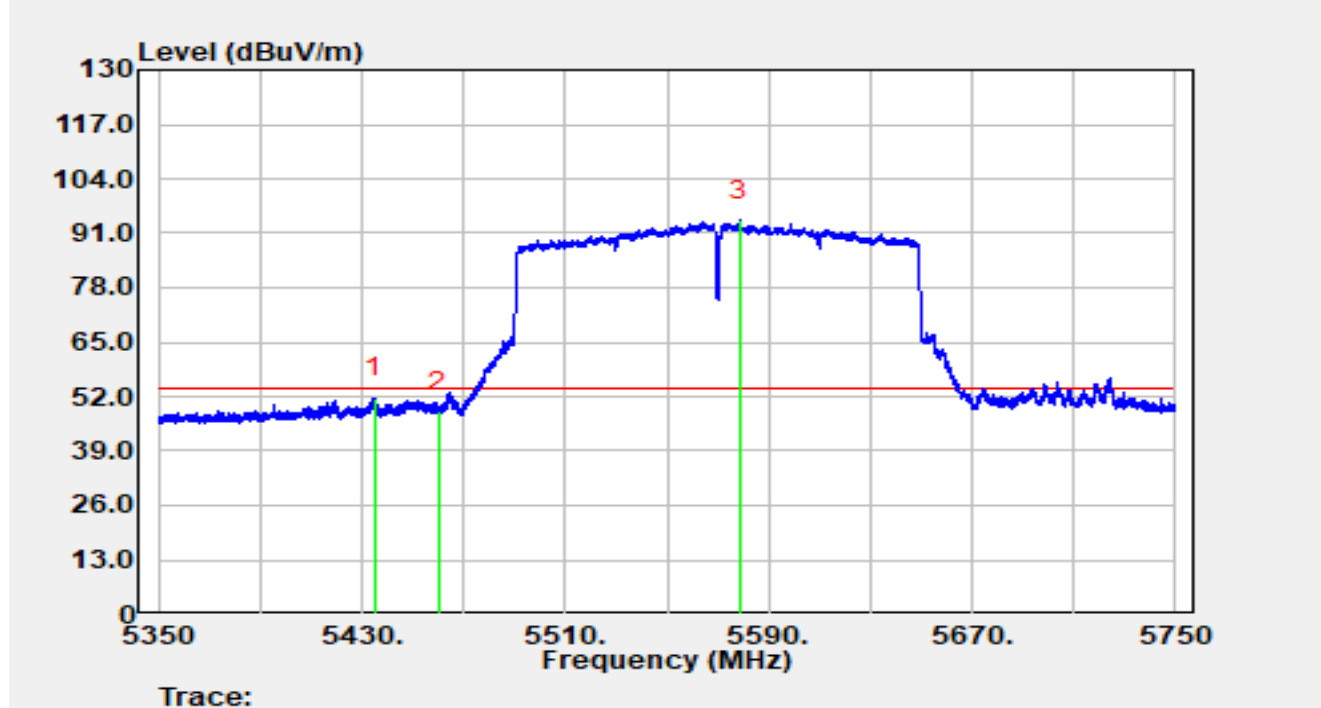


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5434.84	31.70	19.97	51.67	-2.33	54.00	Average
2		5460.00	28.20	20.15	48.35	-5.65	54.00	Average
3		5578.76	73.98	20.09	94.07	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The point (3) is Wi-Fi fundamental frequency that is not evaluated in this item.

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-06-30
Temperature	26.3 °C	Humidity	58.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Alin Zhou
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5745MHz – MIMO Mode Ant 0 & Ant 1		

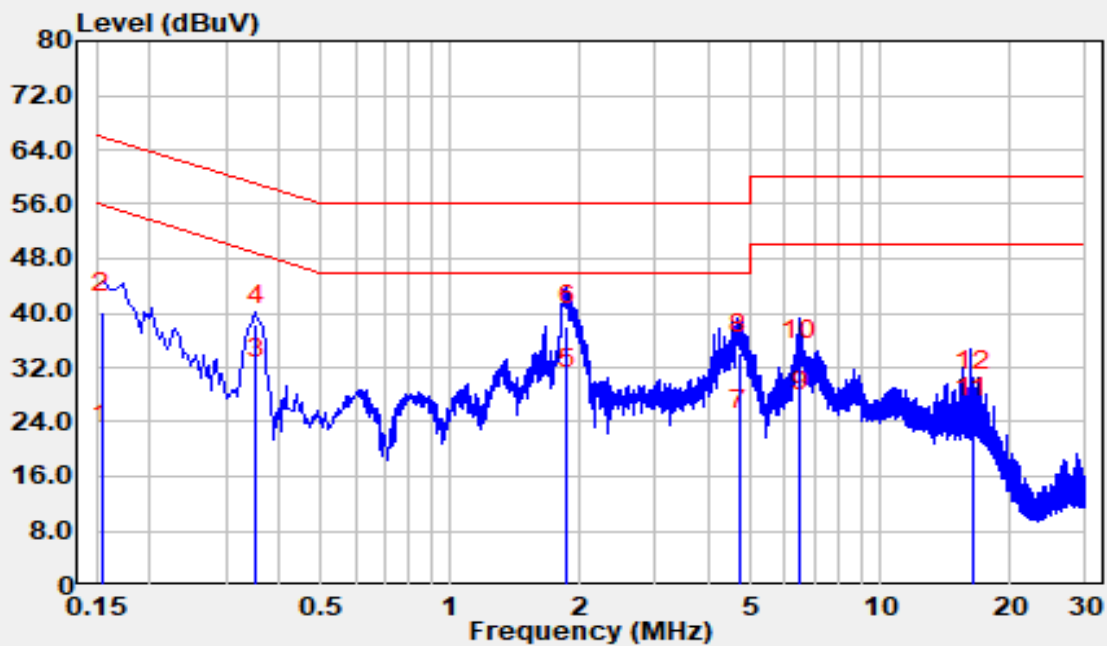


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	10.90	9.92	20.82	-34.96	55.78	Average
2		0.15	30.10	9.92	40.02	-25.76	65.78	QP
3		0.35	20.20	10.02	30.22	-18.68	48.90	Average
4		0.35	28.30	10.02	38.32	-20.58	58.90	QP
5	*	1.86	18.30	10.59	28.89	-17.11	46.00	Average
6		1.86	27.50	10.59	38.09	-17.91	56.00	QP
7		4.69	11.70	11.10	22.80	-23.20	46.00	Average
8		4.69	22.90	11.10	34.00	-22.00	56.00	QP
9		6.49	14.20	11.34	25.54	-24.46	50.00	Average
10		6.49	21.70	11.34	33.04	-26.96	60.00	QP
11		16.33	13.00	11.53	24.53	-25.47	50.00	Average
12		16.33	17.00	11.53	28.53	-31.47	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-06-30
Temperature	26.3 °C	Humidity	58.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Alin Zhou
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	hAP ax S	Test Voltage	AC 120V/60Hz
Test Mode	Transmit By 802.11ac-VHT20 at 5745MHz – MIMO Mode Ant 0 & Ant 1		

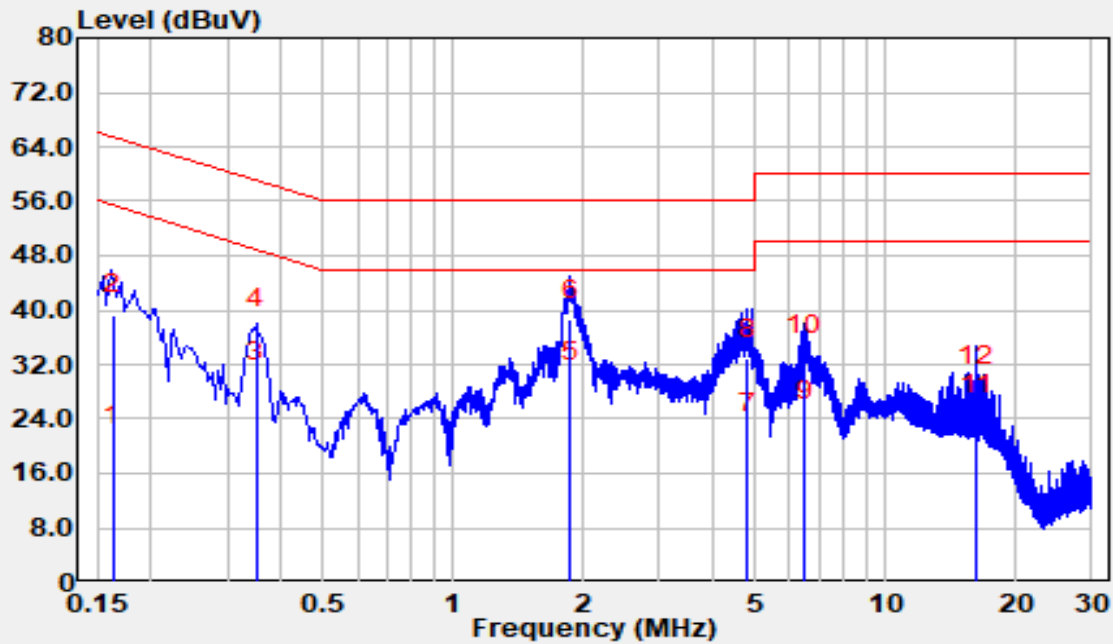

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.16	10.20	9.96	20.16	-35.14	55.30	Average
2		0.16	29.40	9.96	39.36	-25.94	65.30	QP
3		0.35	19.50	10.03	29.53	-19.43	48.96	Average
4		0.35	27.10	10.03	37.13	-21.83	58.96	QP
5	*	1.86	18.50	10.80	29.30	-16.70	46.00	Average
6		1.86	27.70	10.80	38.50	-17.50	56.00	QP
7		4.79	10.50	11.36	21.86	-24.14	46.00	Average
8		4.79	21.50	11.36	32.86	-23.14	56.00	QP
9		6.51	12.30	11.38	23.68	-26.32	50.00	Average
10		6.51	22.00	11.38	33.38	-26.62	60.00	QP
11		16.28	13.20	11.48	24.68	-25.32	50.00	Average
12		16.28	17.30	11.48	28.78	-31.22	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1027042-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1027042-UE” file.

_____ The End _____