



FBS-10F-WiFi Antenna Test Report


Senao Networks, Inc.

Customer	Fortinet
Project	FBS-10F-WiFi
Project Description	Dual antenna*2 BLE antenna*1
Test Date	2023/03/29
Test Personnel	Tony
Report Version	A01

- **Agenda**
 - Antenna Development Resource
 - Antenna Testing Set Up
 - Placement and Specification
 - S11 & Isolation
 - Radiation Pattern
 - Efficiency and Gain

3D Anechoic Chamber - BWANT


- Size: 7.32M(L)x3.66M(W)x3.66M(H)
- Testing range from 400MHz to 7GHz
- Chamber Isolation : 10KHz to 10GHz >100dB (NSA 94-106)
- Calibration antenna : BWANT SD650 /SD740 /SD900 /SD1150 /SD1575 /SD1800 /SD2140 /SD2450 /SD3200 /SD3600 /SD4550 /SD5400 /HA-0508
- Calibration date: 2022/10/27
- Test software : BWANT 3D Passive

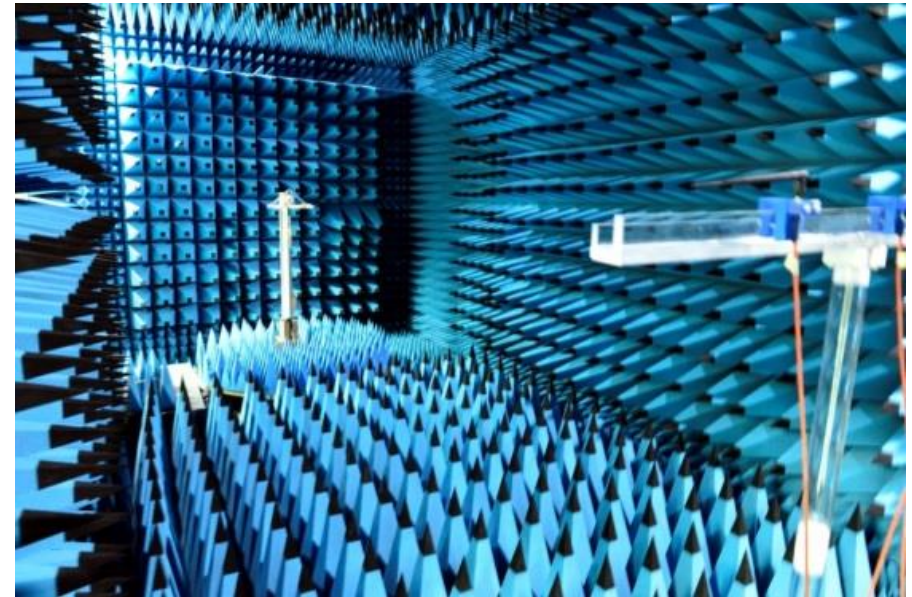


3D Anechoic Chamber

Antenna Testing Set Up


- The DUT is set up on the test fixture and the antenna is connected to the test cable to measure the antenna performance.

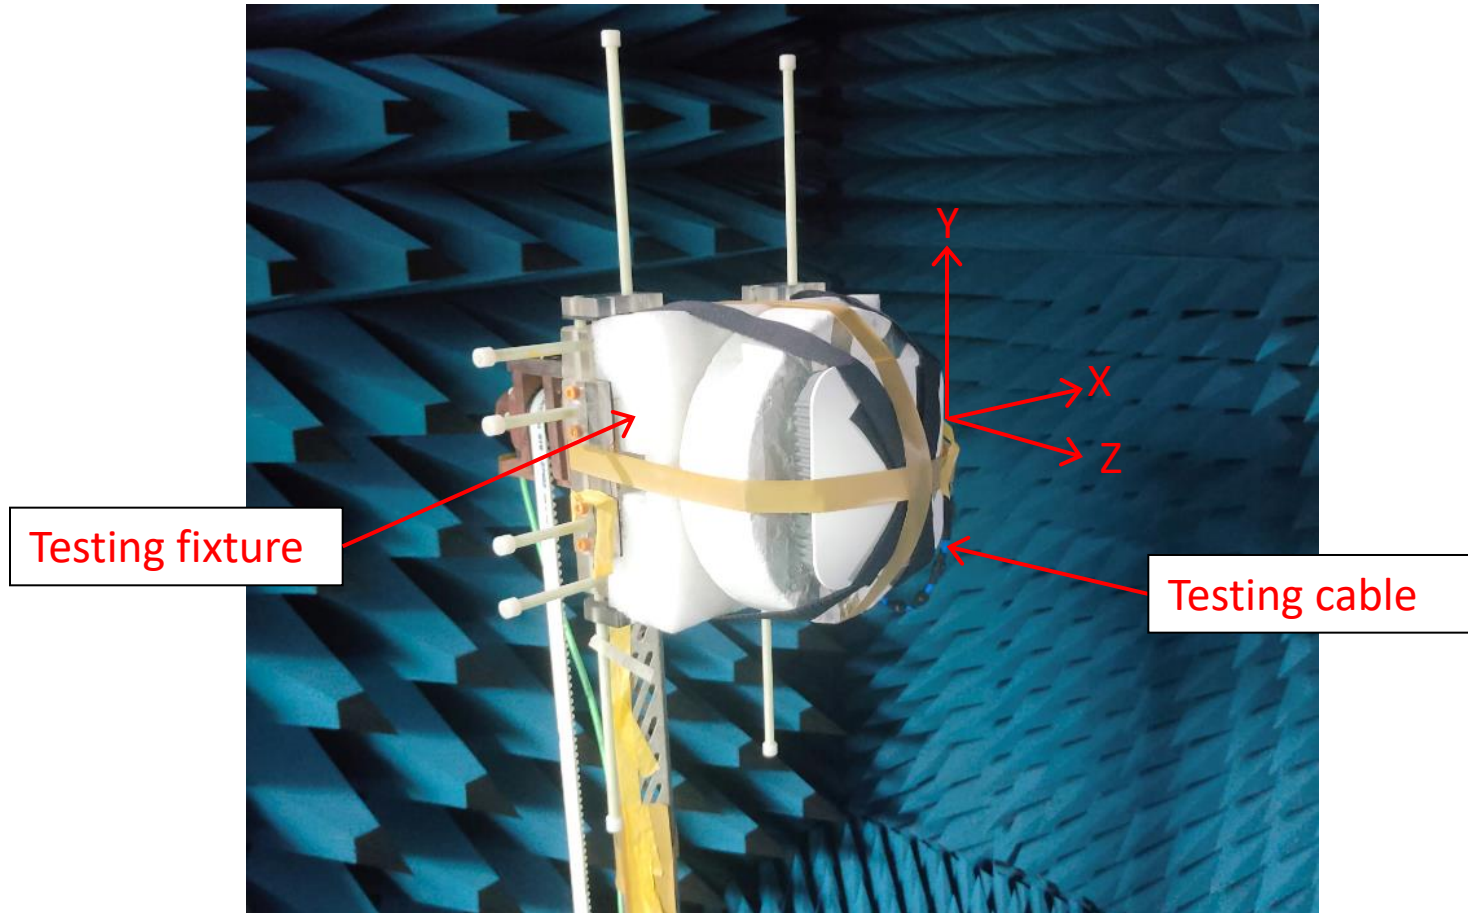


Placement and specification

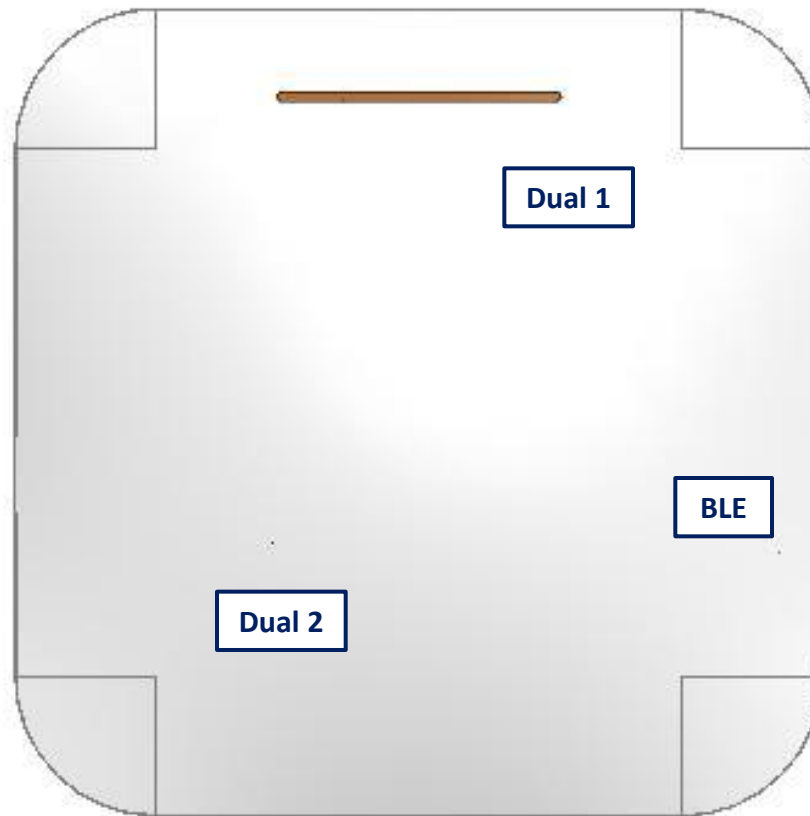

Ant No.	Brand name	P/N	Operating Band	Gain (dBi)	Efficiency (%)	Ant Type	Material	Feeding
Dual 1	Senao	5718A0543300	2400MHz ~ 2500 MHz 5150MHz ~ 5850 MHz	4.9@2G 5.2@5G	68.9@2G 72.6@5G	PIFA	Metal	Cable
Dual 2	Senao	5718A0544300	2400MHz ~ 2500 MHz 5150MHz ~ 5850 MHz	3.8@2G 5.5@5G	66.6@2G 67.7@5G	PIFA	Metal	Cable
BLE	Senao	5718A0546300	2400MHz ~ 2500 MHz	3.6	64.6	PIFA	Metal	Cable





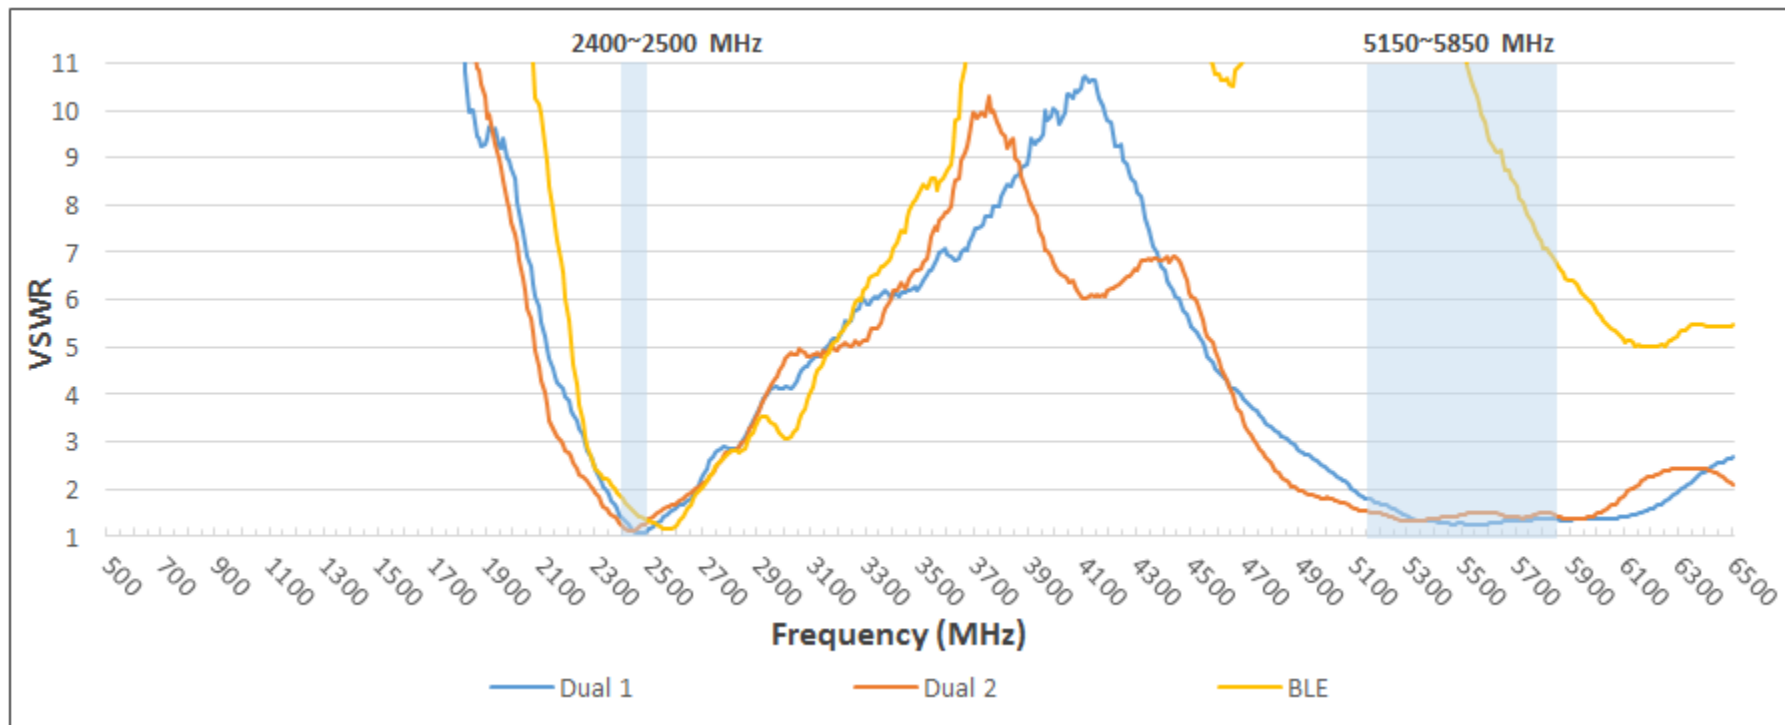


VSWR			
Freq. (MHz)	Dual 1	Dual 2	BLE
2400	1.38	1.38	1.80
2450	1.09	1.09	1.48
2500	1.16	1.16	1.31
5150	1.79	1.79	13.96
5500	1.27	1.27	11.43
5850	1.36	1.36	6.73





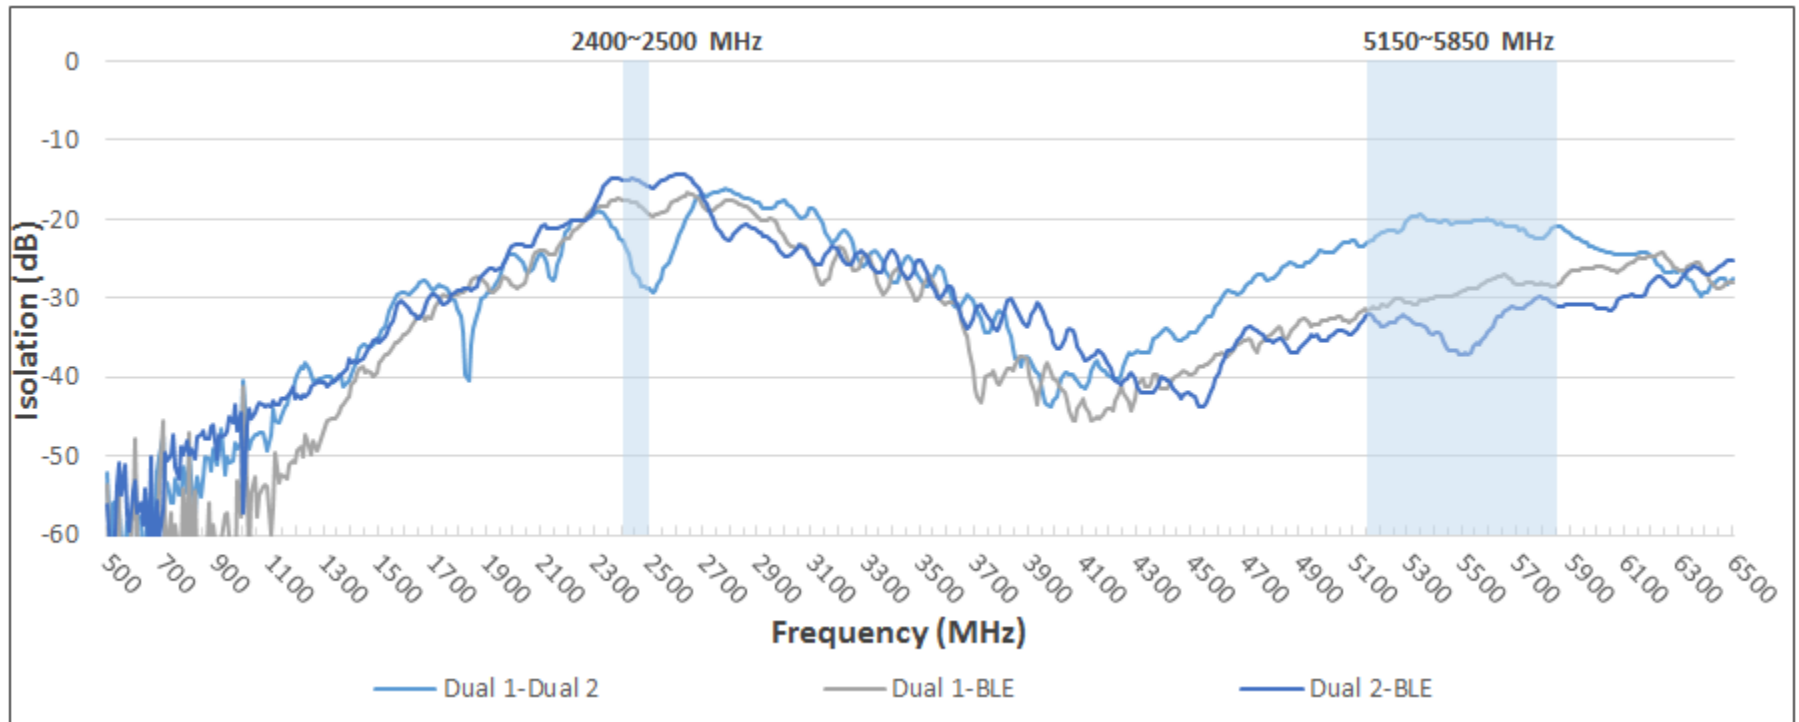


Isolation			
Freq. (MHz)	Dual 1-Dual 2	Dual 1-BLE	Dual 2-BLE
2400	-22.69	-17.58	-15.02
2450	-27.39	-17.93	-15.06
2500	-28.84	-19.46	-16.00
5150	-23.03	-31.53	-32.23
5500	-20.41	-28.96	-37.13
5850	-21.02	-28.34	-30.98






2D Radiation Pattern – Dual 1 @ 2.45GHz

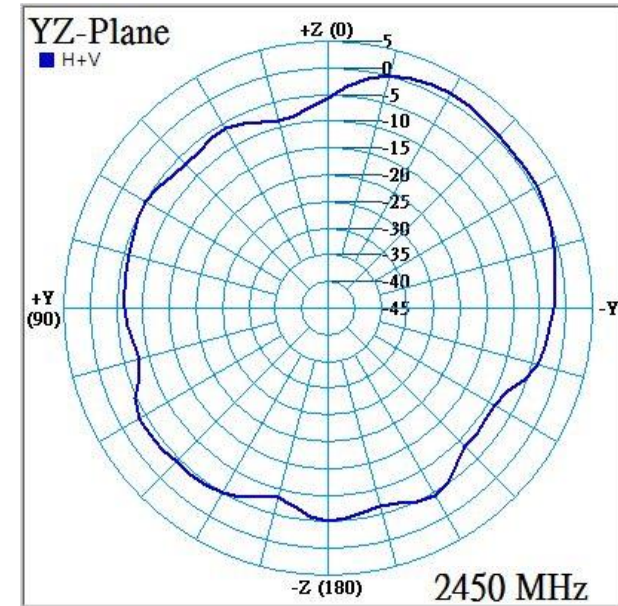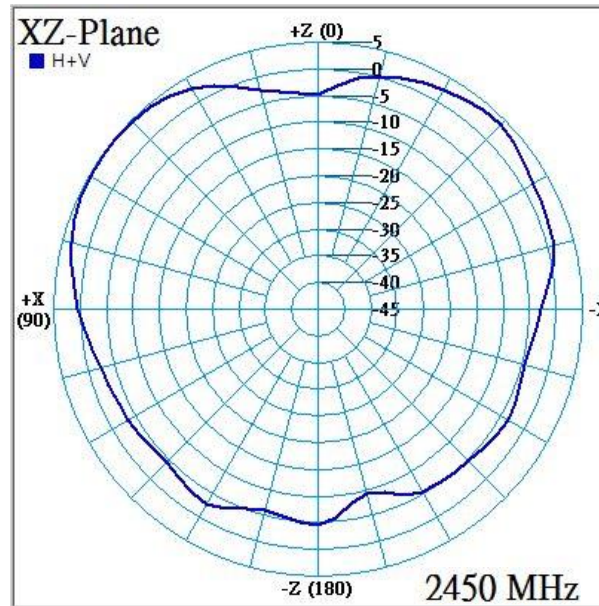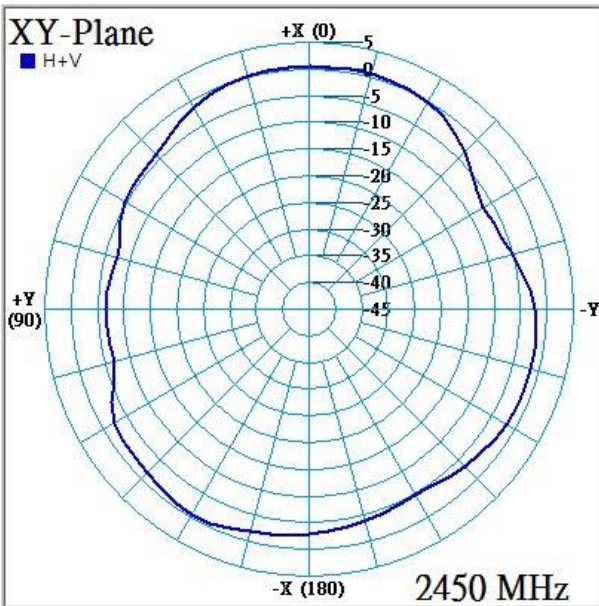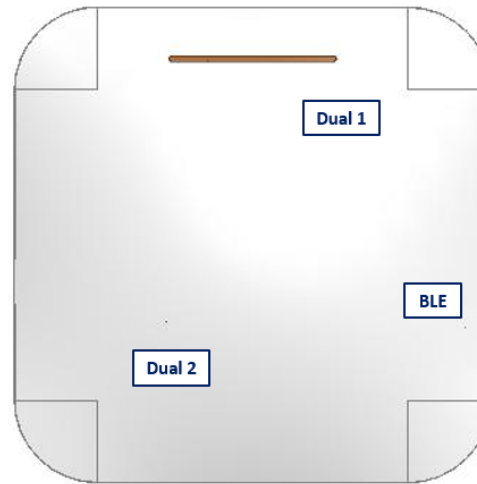






2D Radiation Pattern – Dual 1 @ 5.15GHz

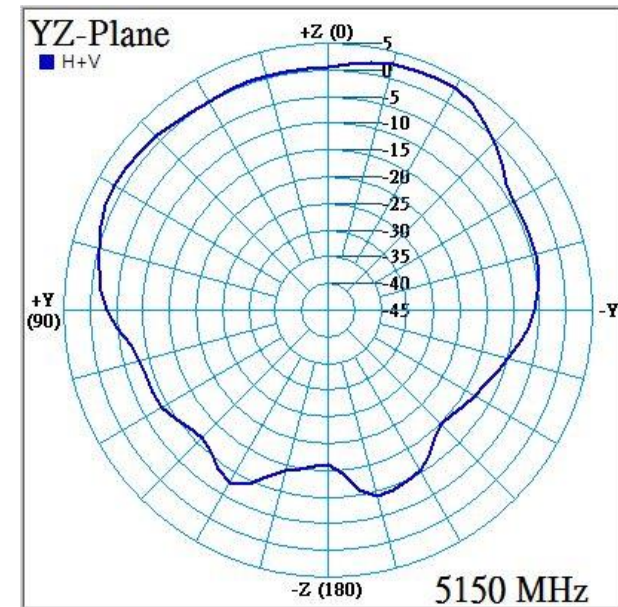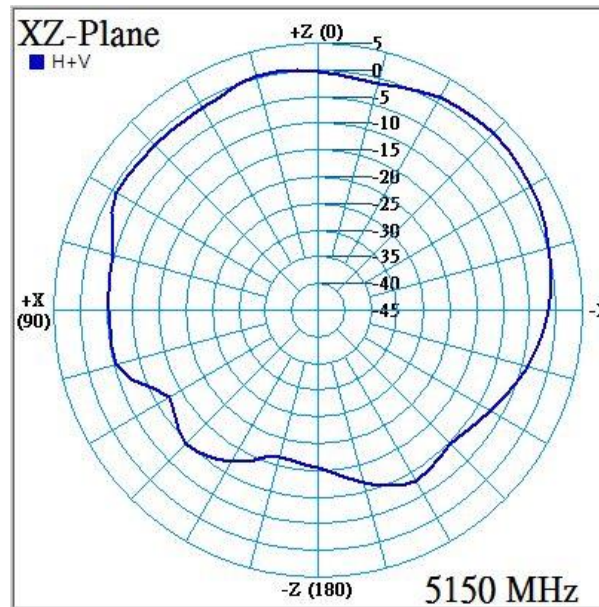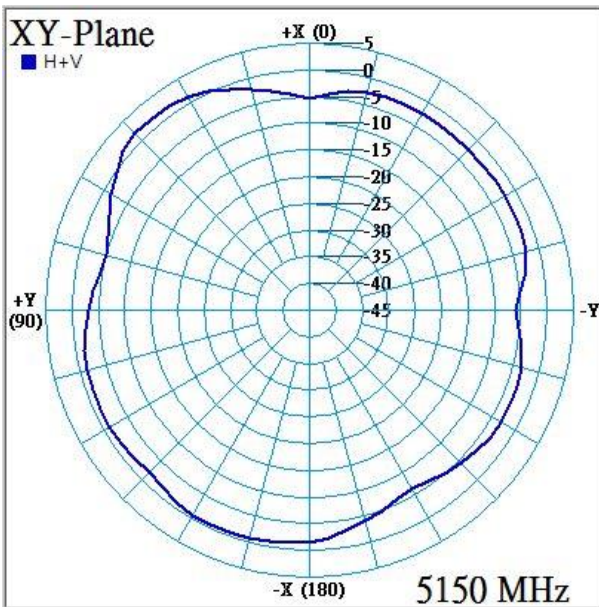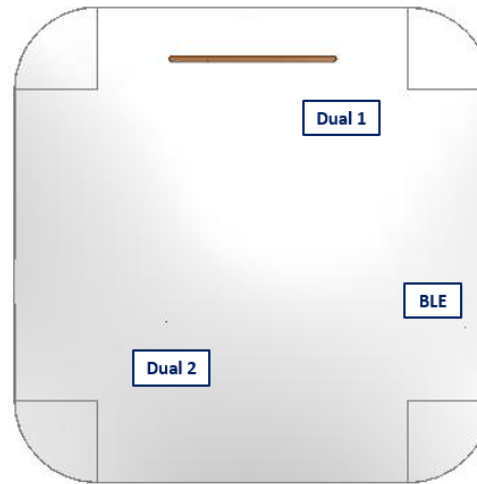






2D Radiation Pattern – Dual 1 @ 5.55GHz

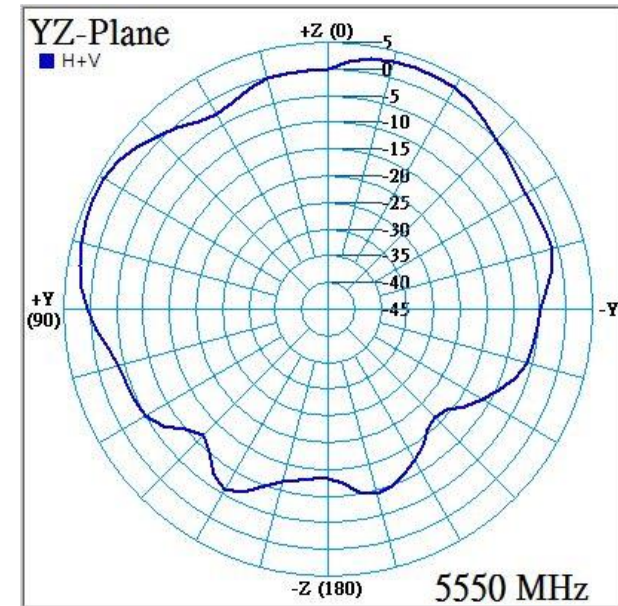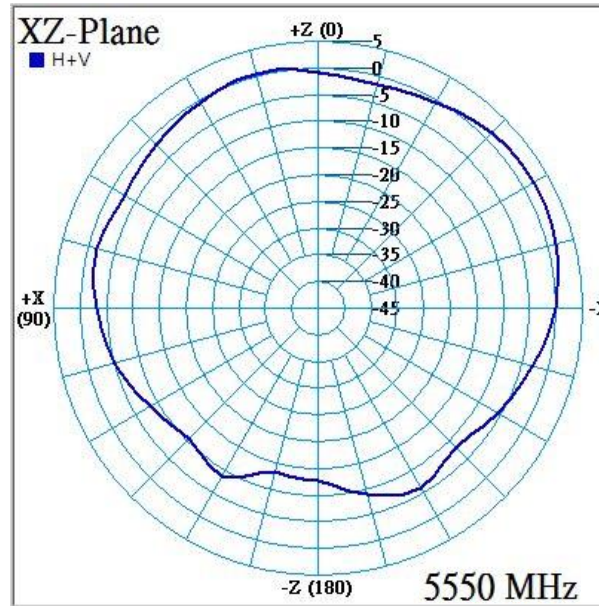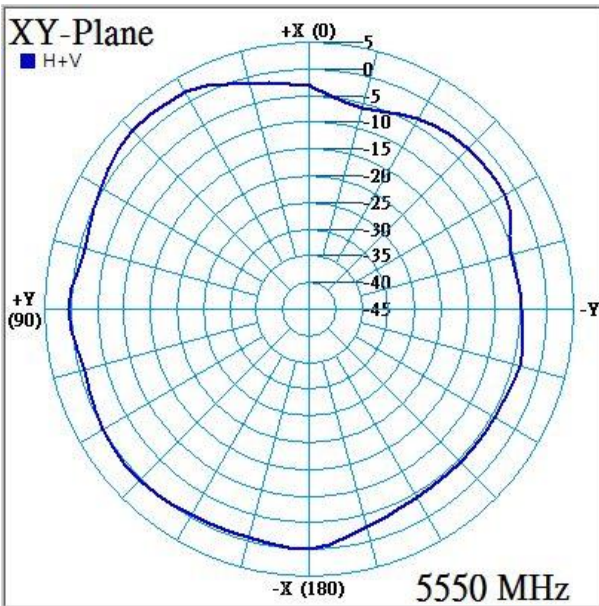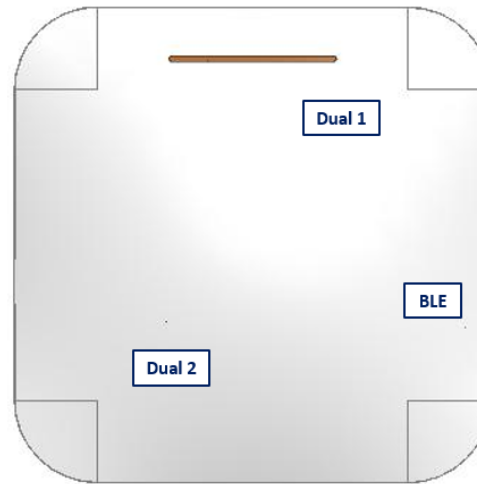






2D Radiation Pattern – Dual 1 @ 5.85GHz

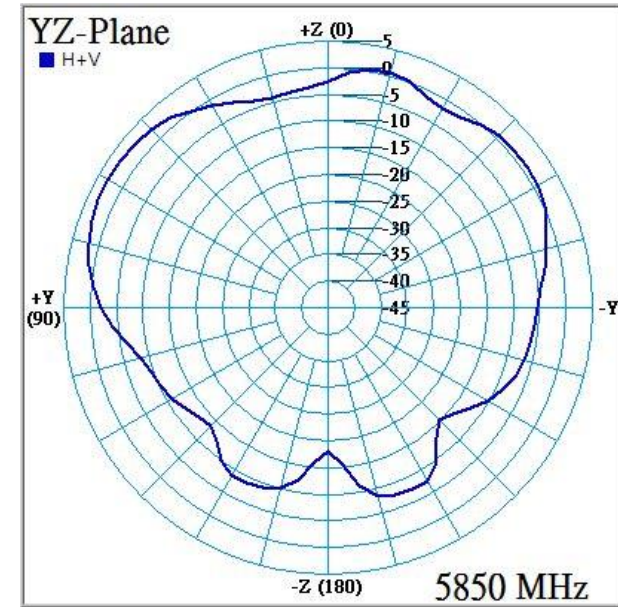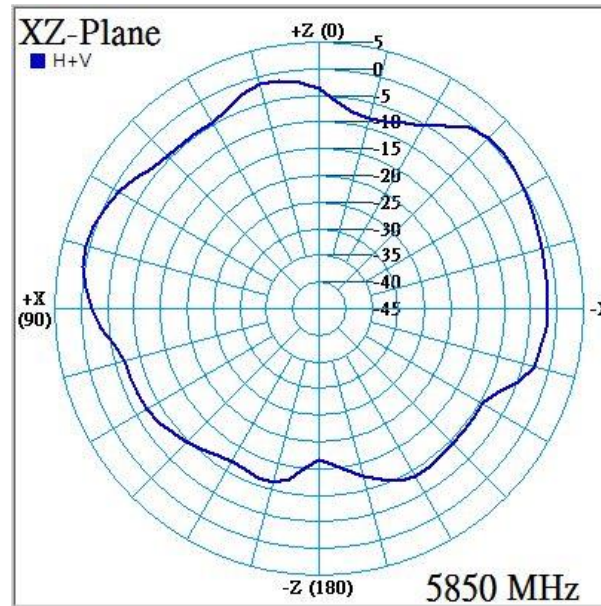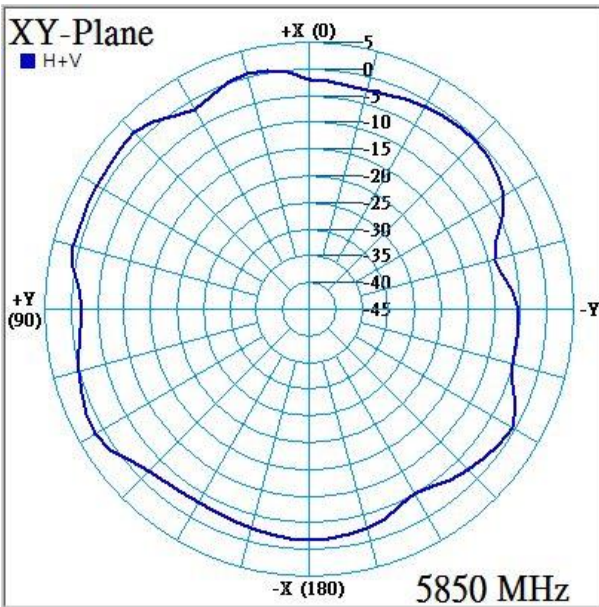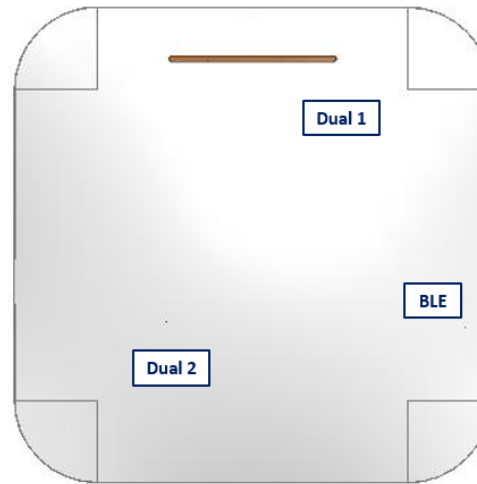






2D Radiation Pattern – Dual 2 @ 2.45GHz

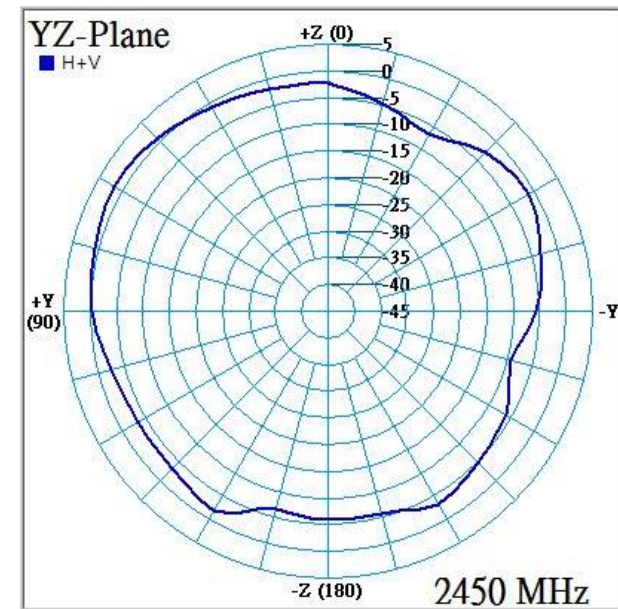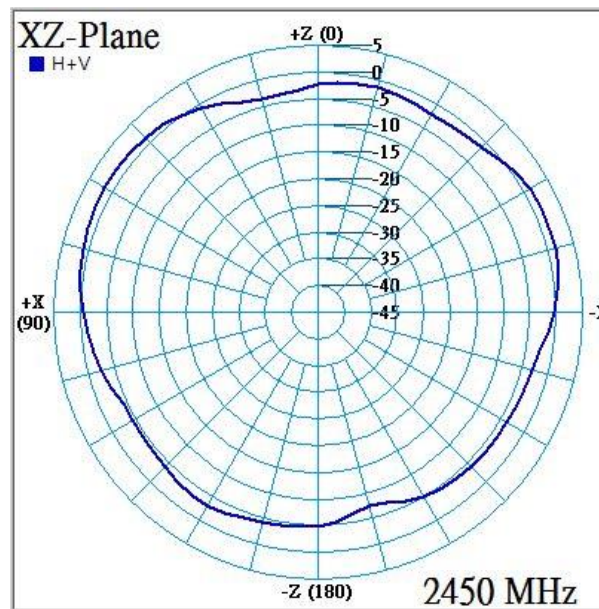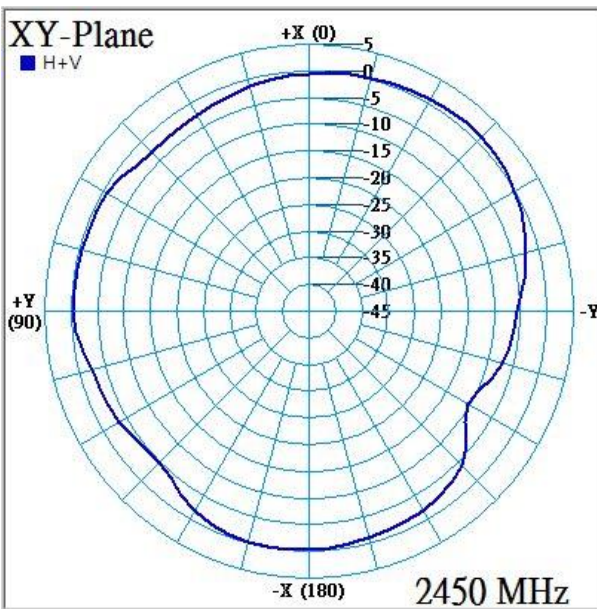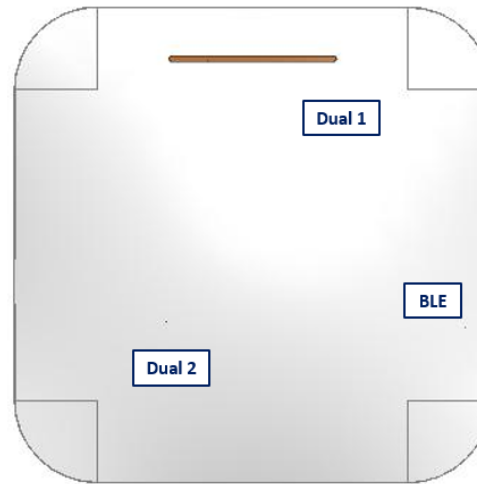






2D Radiation Pattern – Dual 2 @ 5.15GHz

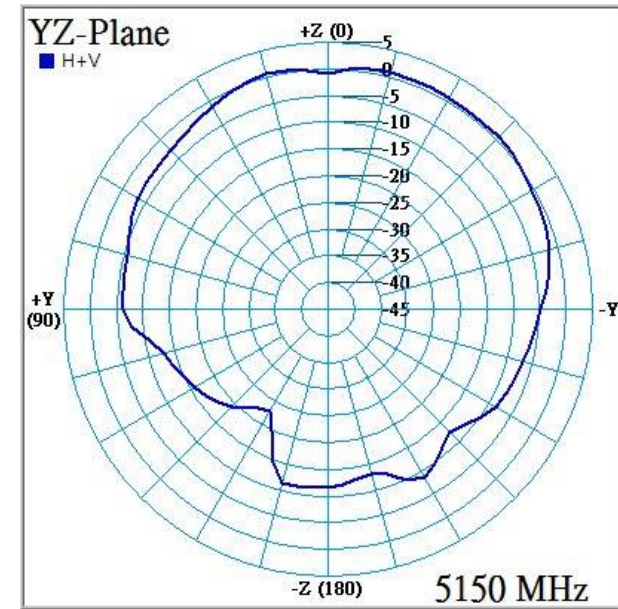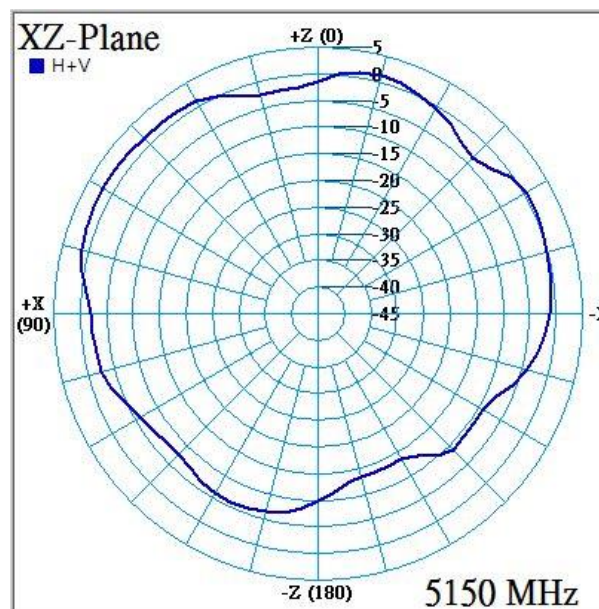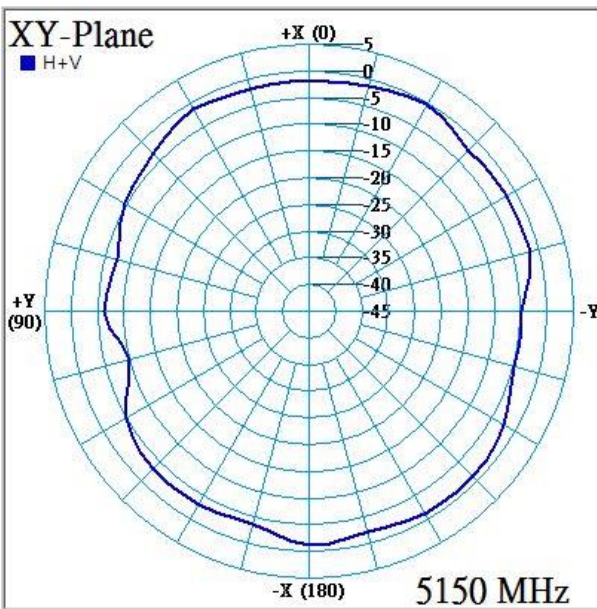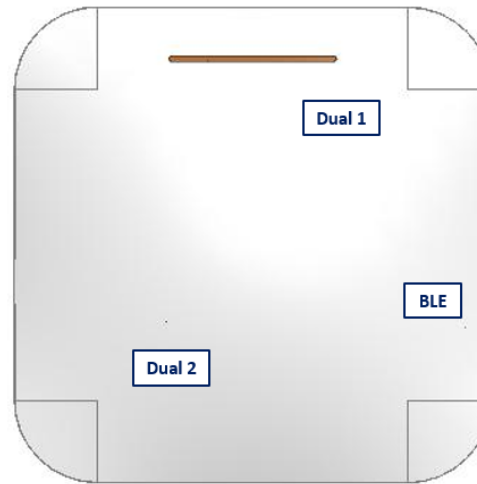






2D Radiation Pattern – Dual 2 @ 5.55GHz

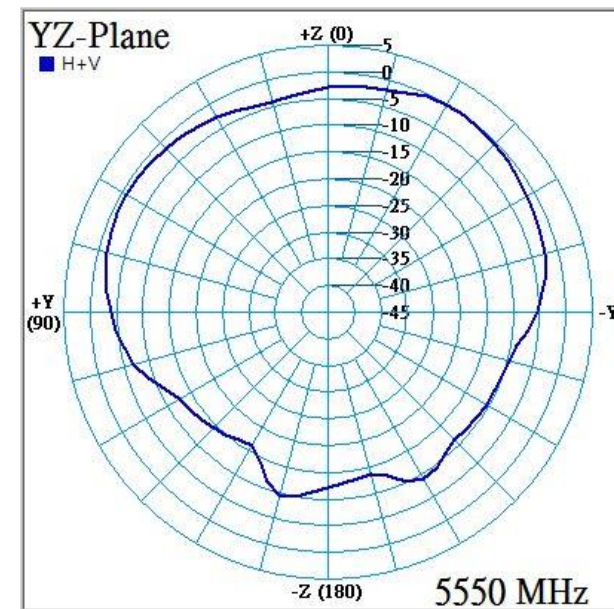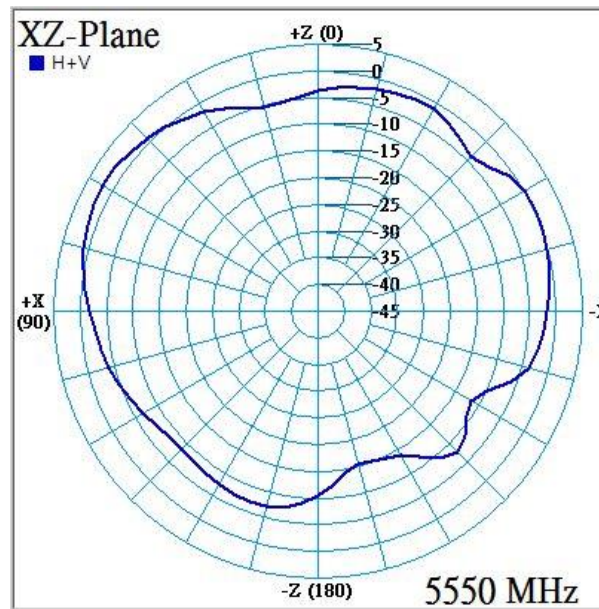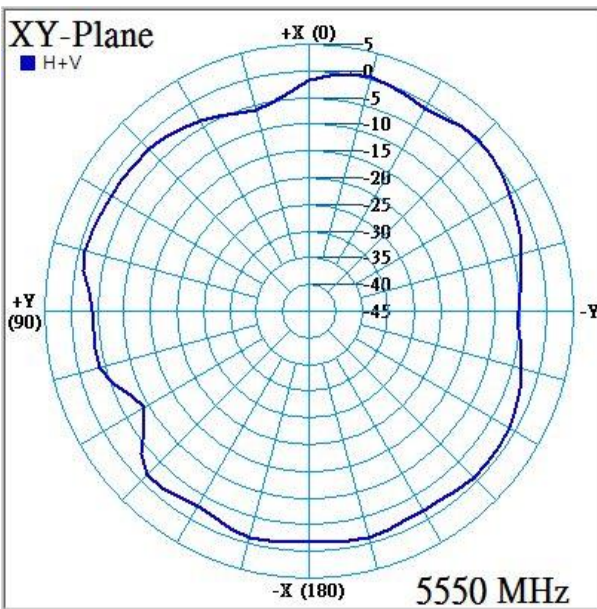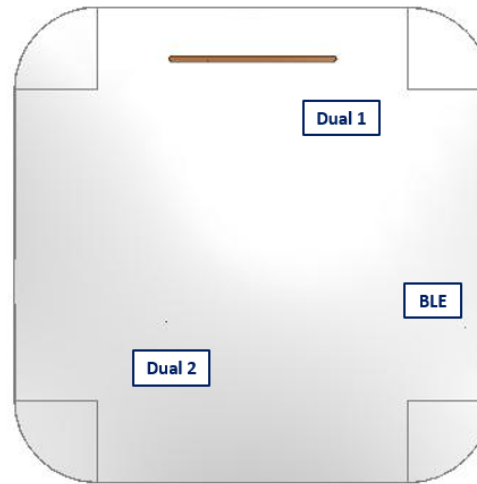





2D Radiation Pattern – Dual 2 @ 5.85GHz

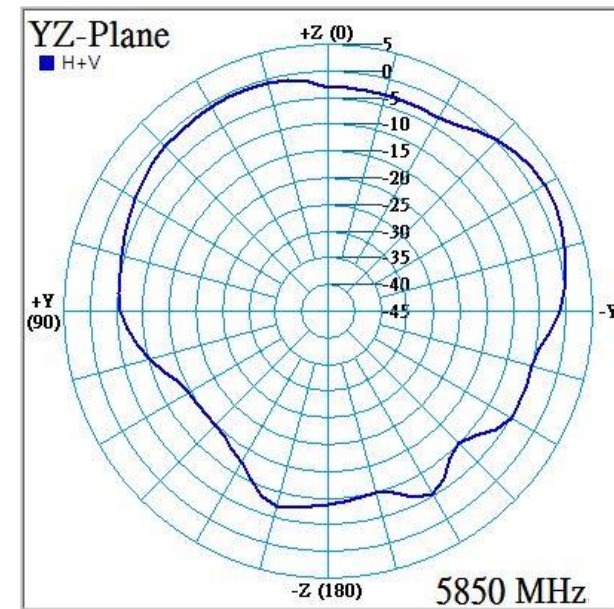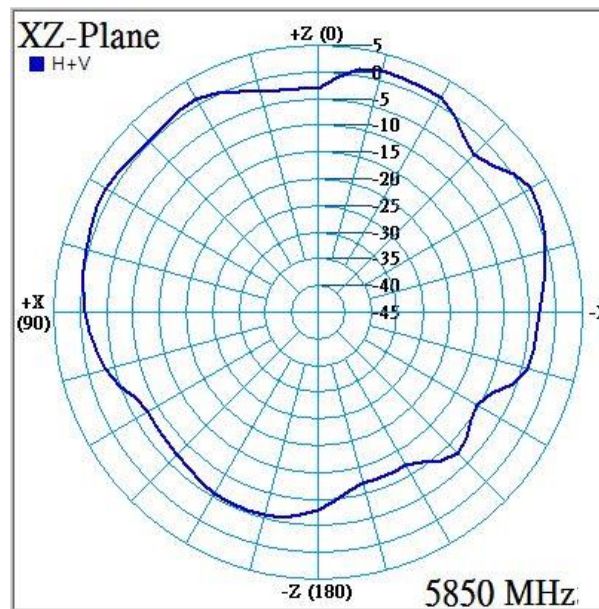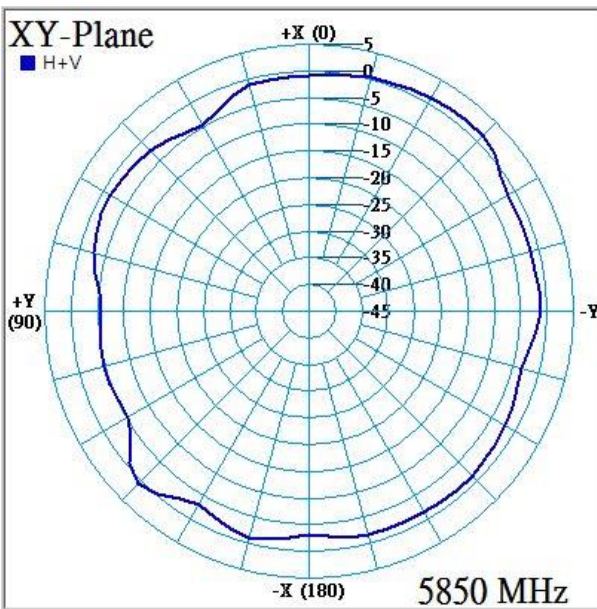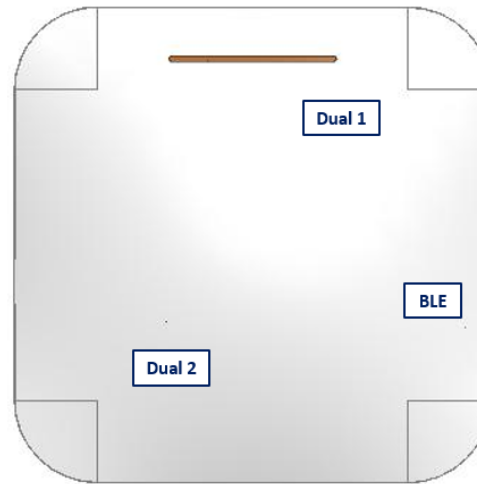





2D Radiation Pattern – BLE @ 245GHz

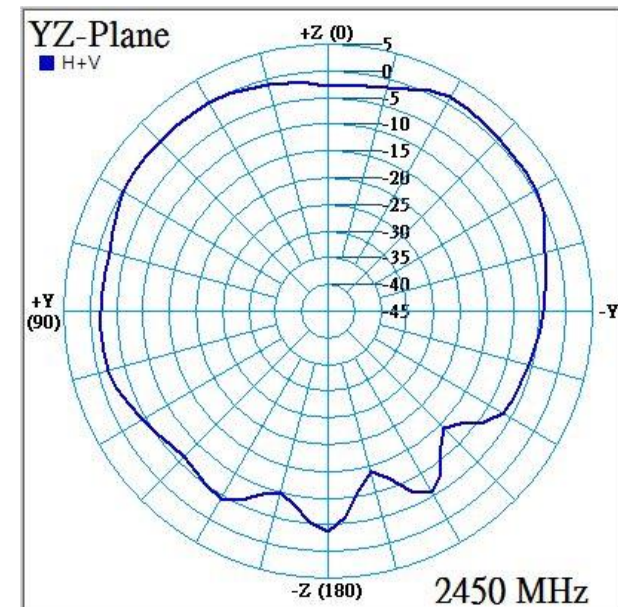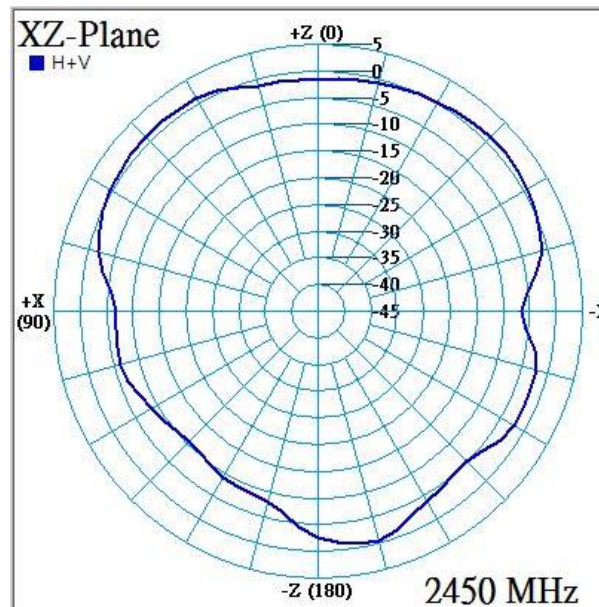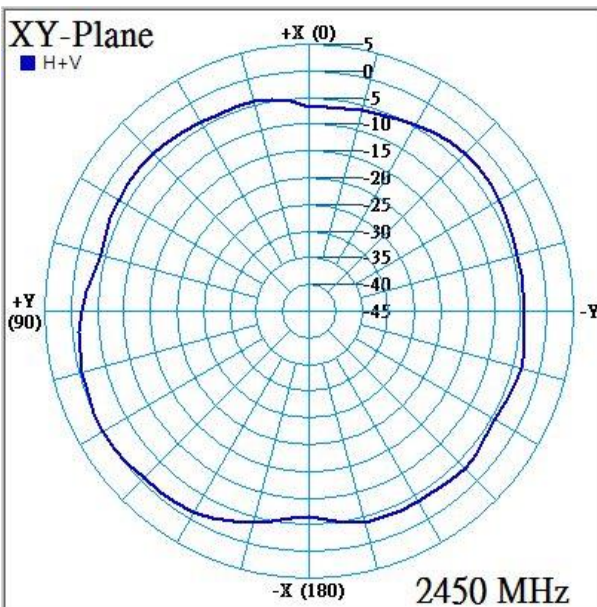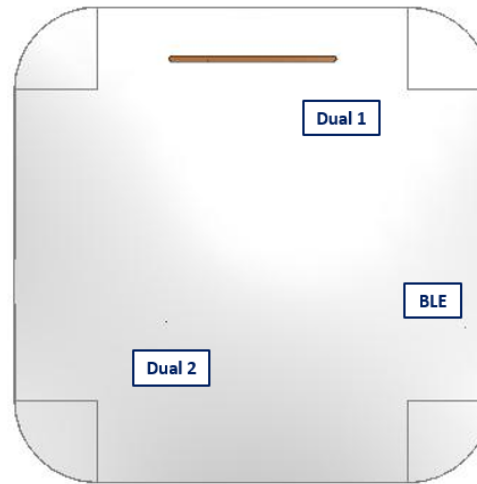

Combine pattern – dual1+dual2 @2.45 GHz

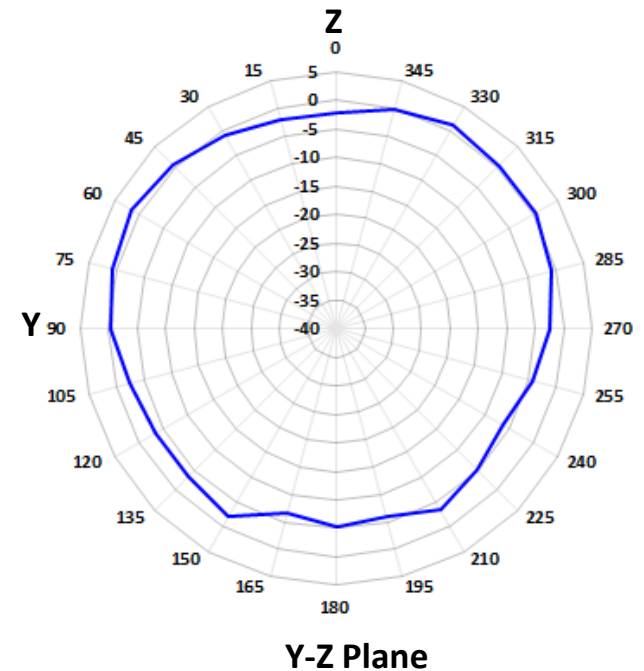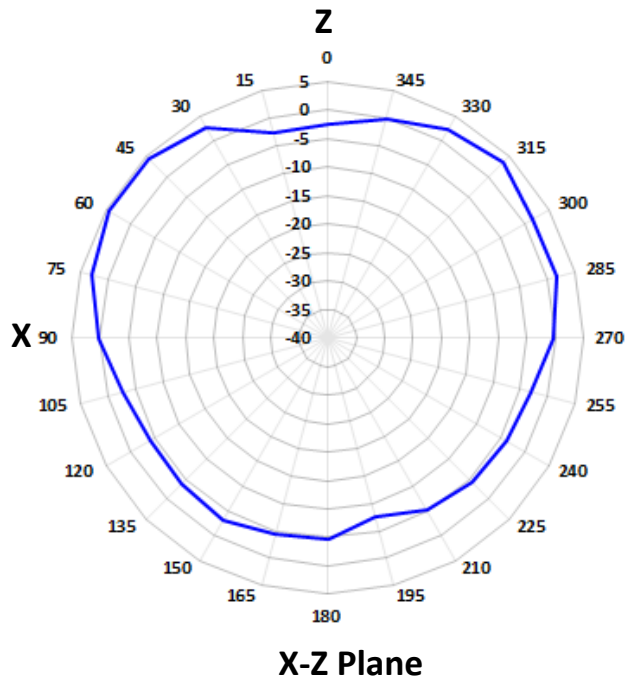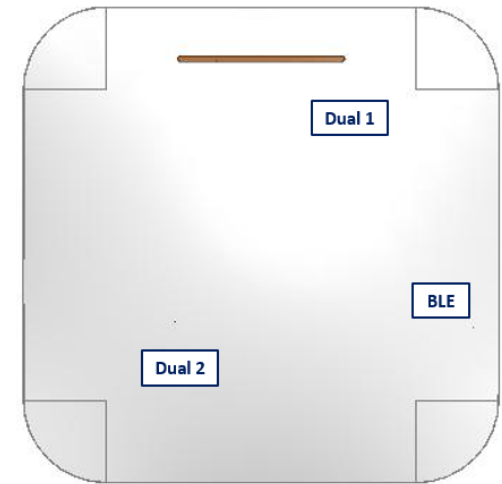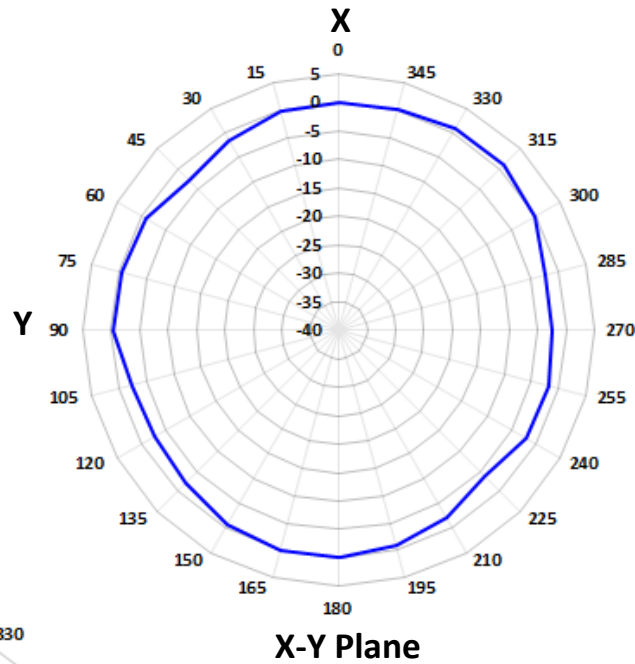

Combine pattern – dual1+dual2 @5.55 GHz

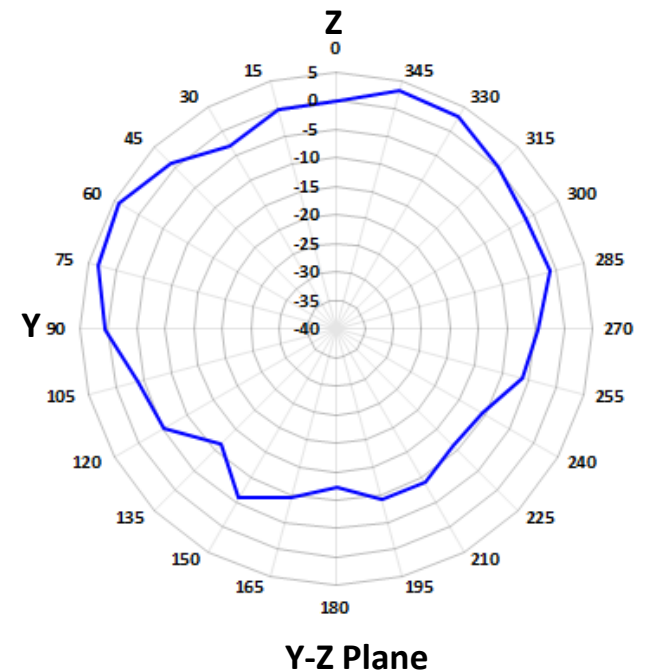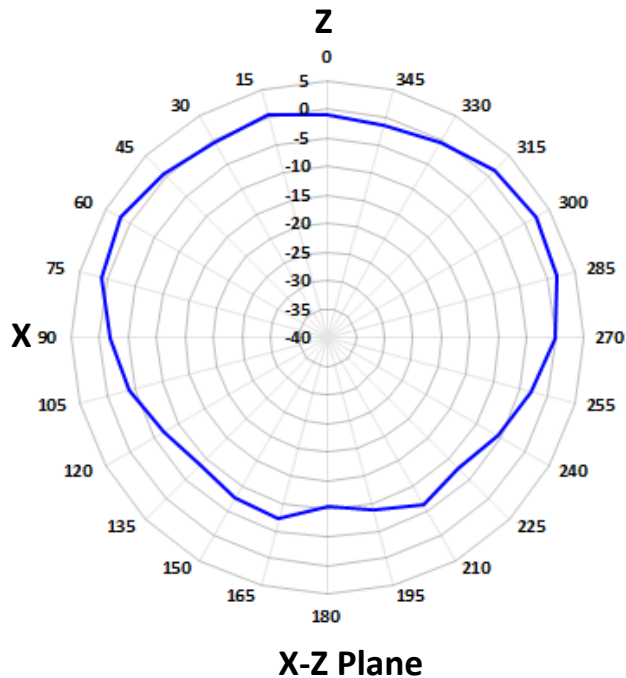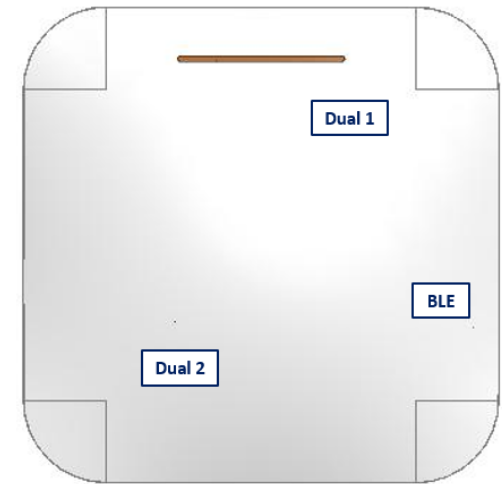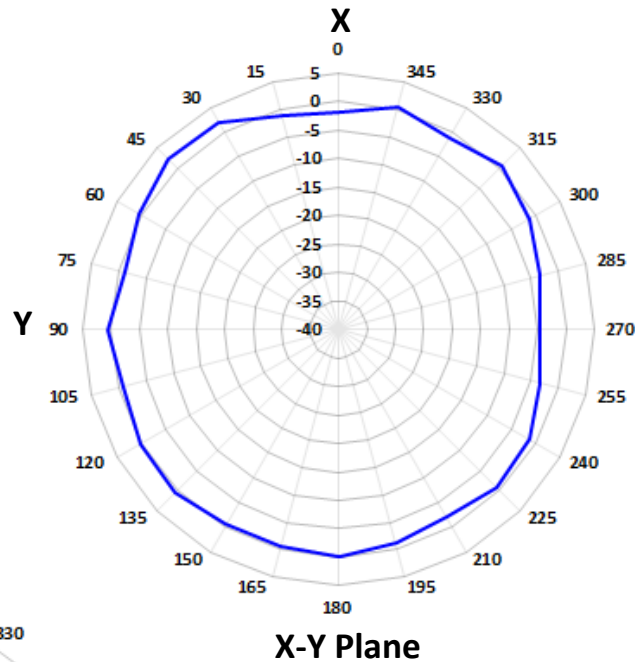

Antenna Efficiency and Gain

Antenna Performance				
Freq. (MHz)	Dual Ant 1		Dual Ant 2	
	Efficiency (%)	Peak Gain (dBi)	Efficiency (%)	Peak Gain (dBi)
2400	60.7	4.4	56.2	3.3
2450	68.9	4.9	66.6	3.4
2500	66.4	4.8	64.5	3.8
5150	63.6	4.6	65.0	3.9
5500	72.6	5.0	67.7	4.2
5850	60.0	5.2	66.1	5.5

Antenna Performance		
Freq. (MHz)	BLE	
	Efficiency (%)	Peak Gain (dBi)
2400	61.2	3.0
2450	63.1	3.6
2500	64.6	3.6