

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBDIS-WTW-P23110748-2 R1

FCC ID: TVE-240607

Product: Secured Wireless Access Point

Brand: FORTINET

Model No.: FBS-10F-WiFi

Series Model: FortiBranchSASE-10F-WiFixxxxxxxxxxx, FBS-10F-WiFixxxxxxxxxxx,
FORTIBRANCHSASE-10F-WiFixxxxxxxxxxx (where "x" can be used as "A-Z", or "0-9", or
"-", or blank for software changes or marketing purposes only)

Received Date: 2024/2/29

Test Date: 2024/2/29 ~ 2024/4/6

Issued Date: 2024/8/20

Applicant: Fortinet, Inc.

Address: 909 Kifer Road Sunnyvale, Ca. 94086

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by: Jeremy Lin
Jeremy Lin / Project Engineer

Date: 2024/8/20

This test report consists of 84 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Lena Wang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	11
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power.....	15
4.2 Power Spectral Density	15
4.3 6 dB Bandwidth	15
4.4 Occupied Bandwidth.....	15
4.5 Frequency Stability	15
4.6 AC Power Conducted Emissions	16
4.7 Unwanted Emissions below 1 GHz	17
4.8 Unwanted Emissions above 1 GHz.....	18
5 Limits of Test Items.....	19
5.1 RF Output Power.....	19
5.2 Power Spectral Density	19
5.3 6 dB Bandwidth	19
5.4 Occupied Bandwidth.....	19
5.5 Frequency Stability	19
5.6 AC Power Conducted Emissions	20
5.7 Unwanted Emissions below 1 GHz	20
5.8 Unwanted Emissions above 1 GHz.....	20
6 Test Arrangements.....	22
6.1 RF Output Power.....	22
6.1.1 Test Setup	22
6.1.2 Test Procedure.....	22
6.2 Power Spectral Density	23
6.2.1 Test Setup	23
6.2.2 Test Procedure.....	23
6.3 6 dB Bandwidth	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	23
6.4 Occupied Bandwidth.....	24
6.4.1 Test Setup	24
6.4.2 Test Procedure.....	24
6.5 Frequency Stability	24
6.5.1 Test Setup	24
6.5.2 Test Procedure.....	24
6.6 AC Power Conducted Emissions	25
6.6.1 Test Setup	25
6.6.2 Test Procedure.....	25
6.7 Unwanted Emissions below 1 GHz	26
6.7.1 Test Setup	26
6.7.2 Test Procedure.....	27

6.8	Unwanted Emissions above 1 GHz.....	28
6.8.1	Test Setup	28
6.8.2	Test Procedure	28
7	Test Results of Test Item	29
7.1	RF Output Power.....	29
7.2	Power Spectral Density	33
7.3	6 dB Bandwidth	38
7.4	Occupied Bandwidth.....	40
7.5	Frequency Stability	45
7.6	AC Power Conducted Emissions	46
7.7	Unwanted Emissions below 1 GHz	50
7.8	Unwanted Emissions above 1 GHz.....	54
8	Pictures of Test Arrangements	83
9	Information of the Testing Laboratories	84

Release Control Record

Issue No.	Description	Date Issued
RFBDYS-WTW-P23110748-2	Original Release	2024/7/11
RFBDYS-WTW-P23110748-2 R1	1. Revise applicant' address, brand and series model name 2. Remove WLAN 5G Band 2, 3	2024/8/20

1 Certificate

Product: Secured Wireless Access Point

Brand: FORTINET

Test Model: FBS-10F-WiFi

Series Model: FortiBranchSASE-10F-WiFixxxxxxxxxx, FBS-10F-WiFixxxxxxxxxx, FORTIBRANCHSASE-10F-WiFixxxxxxxxxx (where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)

Sample Status: Engineering Sample

Applicant: Fortinet, Inc.

Test Date: 2024/2/29 ~ 2024/4/6

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: ANSI C63.10-2013
KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(1) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -8.38 dB at 0.46200 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -1.0 dB at 36.79 MHz
15.407(b) (1/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.5 dB at 5148.70 MHz
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Notes: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.6 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Secured Wireless Access Point
Brand	FORTINET
Test Model	FBS-10F-WiFi
Series Model:	FortiBranchSASE-10F-WiFiXXXXXXXXXX, FBS-10F-WiFiXXXXXXXXXX, FORTIBRANCHSASE-10F-WiFiXXXXXXXXXX (where "x" can be used as "A-Z", or "0-9", or "-", or blank for software changes or marketing purposes only)
Status of EUT	Engineering Sample
Power Supply Rating	12Vdc from Adapter 54Vdc from PoE
Modulation Type	802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to MCS15 802.11ac: up to MCS9 802.11ax: up to MCS11
Operating Frequency	5.18 GHz ~ 5.24 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	CDD Mode: 5.18 GHz ~ 5.24 GHz : 358.553 mW (25.55 dBm) 5.745 GHz ~ 5.825 GHz : 276.288 mW (24.41 dBm) Beamforming Mode: 5.18 GHz ~ 5.24 GHz : 358.553 mW (25.55 dBm) 5.745 GHz ~ 5.825 GHz : 276.288 mW (24.41 dBm)
EUT Category	Indoor Access Point

Note:

1. The EUT consumes power from the following adapter and PoE.

Adapter (support unit only)	
Brand	Asian Power Devices Inc.
Model	WA-36W12R
Input Power	100-240Vac, 50-60Hz, 0.9A Max
Output Power	12Vdc, 3.0A, 36.0W
Power Cord	1.5 meter non-shielded cable without core

PoE (support unit only)	
Brand	EnGenius
Model	EPA5006GPR
Input Power	100-240Vac, 50-60Hz, 0.8A
Output Power	54Vdc, 0.6A

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT.

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4 GHz)	WLAN (5 GHz)
2	WLAN (5 GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

*WLAN 2.4G and BT technologies cannot transmit at same time.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Type		PIFA	
Antenna Connector		i-pex(MHF)	
Antenna No.		Gain (dBi)	
		2.4~2.4835GHz	5.180~5.825GHz
1	Chain0	4.9	5.2
2	Chain1	3.8	5.5
3	BLE	3.6	-

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), 802.11ac mode for 20 MHz (40 MHz, 80 MHz) and 802.11ax mode for 20 MHz (40 MHz, 80 MHz), therefore the manufacturer will control the power for 802.11n/ac mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

FOR 5180 ~ 5240 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20)

Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz
44	5220 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775 MHz

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition: Y-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	B	802.11a	CDD	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD & Beamforming	36, 40, 48, 149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD & Beamforming	38, 46, 151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD & Beamforming	42, 155	BPSK	MCS0
Power Spectral Density	B	802.11a	CDD	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD	36, 40, 48, 149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD	38, 46, 151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD	42, 155	BPSK	MCS0
6 dB Bandwidth	B	802.11a	CDD	149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD	149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD	151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD	155	BPSK	MCS0
Occupied Bandwidth	B	802.11a	CDD	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD	36, 40, 48, 149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD	38, 46, 151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD	42, 155	BPSK	MCS0
Frequency Stability	B	802.11a	-	36	unmodulated	-
AC Power Conducted Emissions	A, B	802.11ax (HE20)	CDD	157	BPSK	MCS0
Unwanted Emissions below 1 GHz	A, B	802.11ax (HE20)	CDD	157	BPSK	MCS0
Unwanted Emissions above 1 GHz	A	802.11a	CDD	36, 40, 48, 149, 157, 165	BPSK	6Mb/s
		802.11ax (HE20)	CDD	36, 40, 48, 149, 157, 165	BPSK	MCS0
		802.11ax (HE40)	CDD	38, 46, 151, 159	BPSK	MCS0
		802.11ax (HE80)	CDD	42, 155	BPSK	MCS0
EUT Configure Mode:	A	Adapter Mode				
	B	PoE Mode				


3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = $1.984 \text{ ms} / 2.064 \text{ ms} \times 100\% = 96.1\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.17 \text{ dB}$


802.11ax (HE20): Duty cycle = $5.48 \text{ ms} / 5.78 \text{ ms} \times 100\% = 94.8\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.23 \text{ dB}$

802.11ax (HE40): Duty cycle = $5.478 \text{ ms} / 5.786 \text{ ms} \times 100\% = 94.7\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.24 \text{ dB}$

802.11ax (HE80): Duty cycle = $5.46 \text{ ms} / 5.76 \text{ ms} \times 100\% = 94.8\%$, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.23 \text{ dB}$

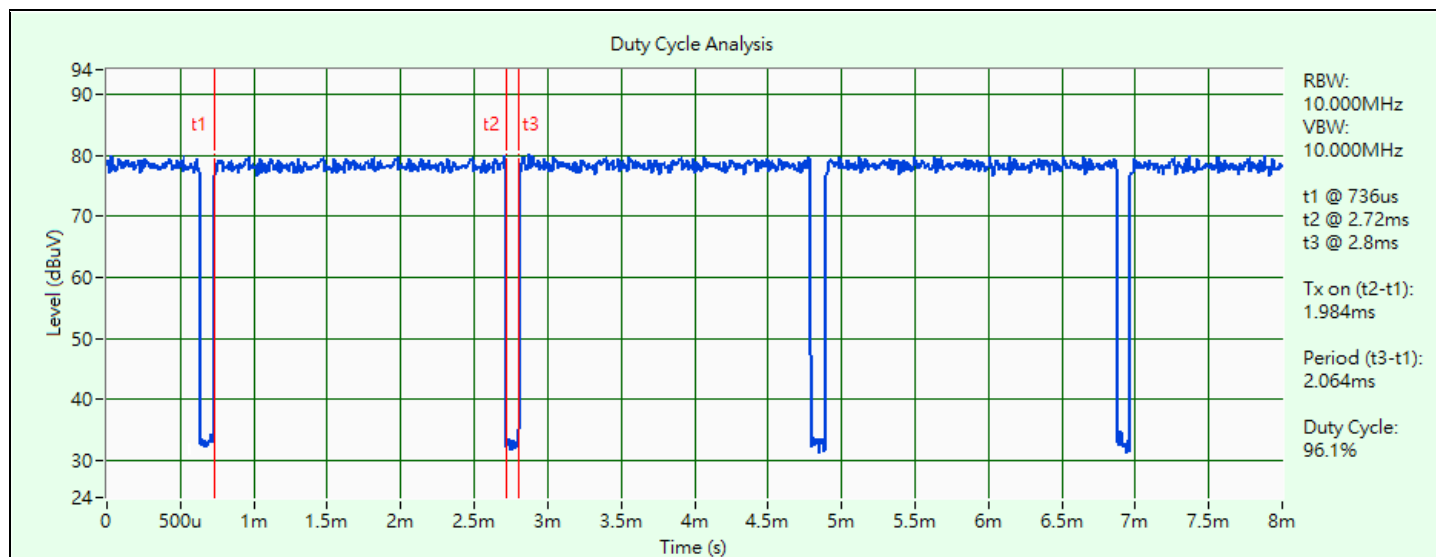


802.11a

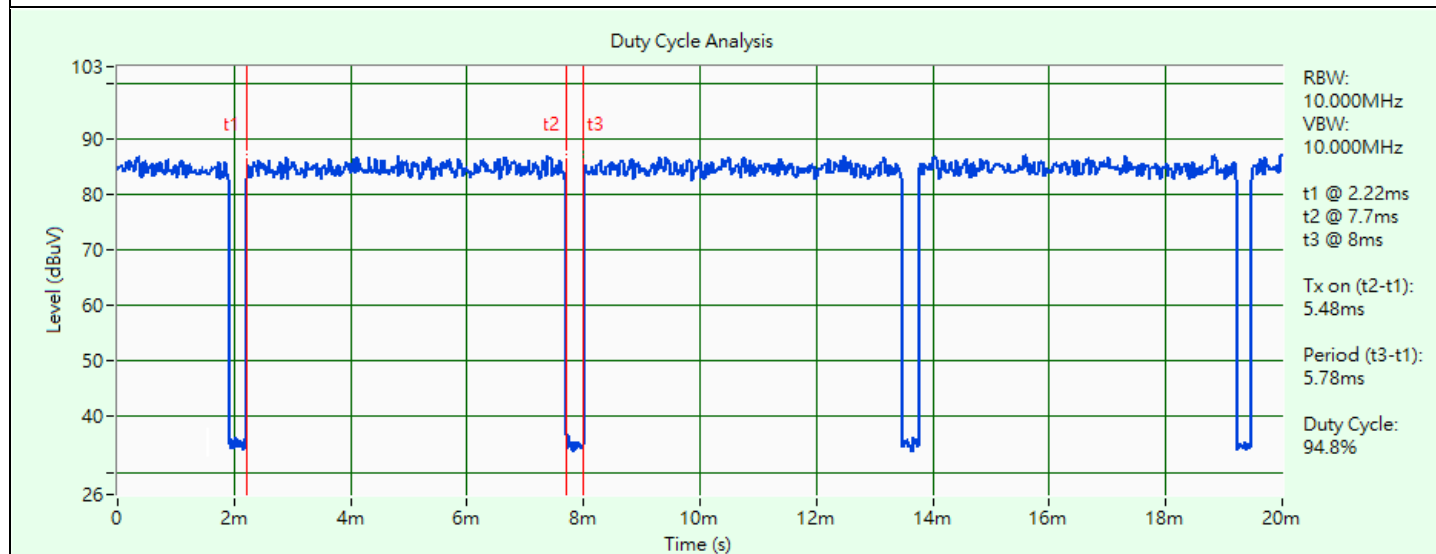


802.11ax (HE20)

Duty Cycle Analysis

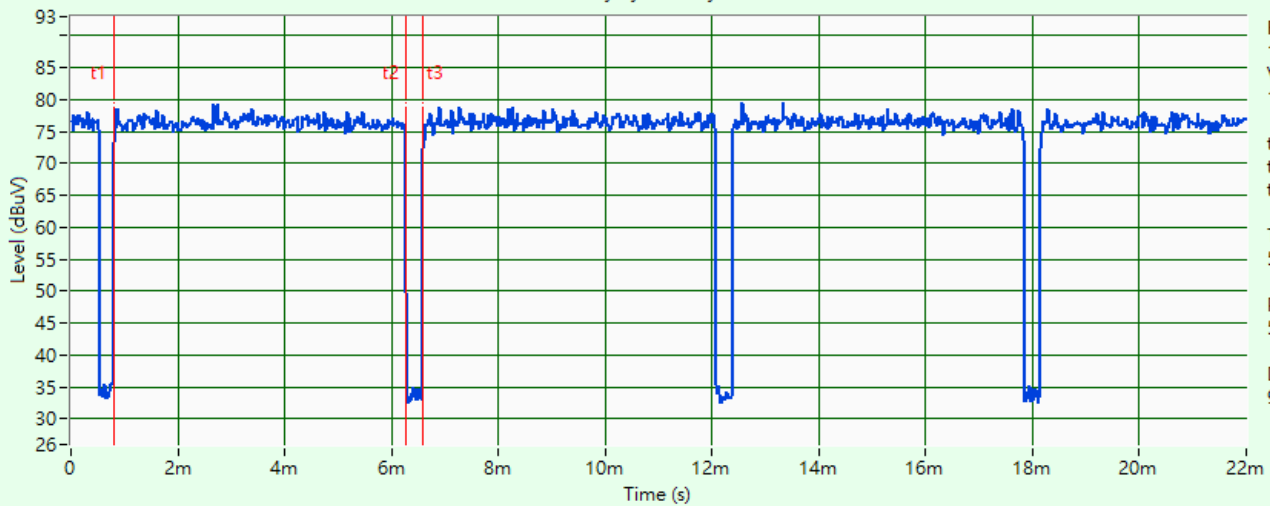

802.11ax (HE40)

Duty Cycle Analysis

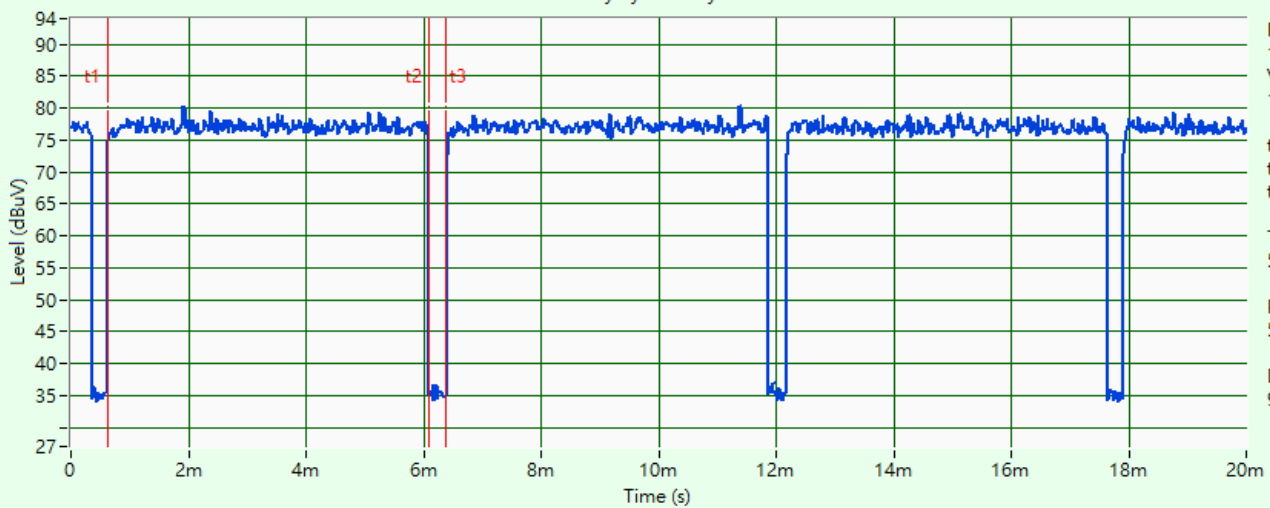


802.11ax (HE80)

3.6 Test Program Used and Operation Descriptions


Controlling software QSPR_5.0-00202 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Mode A

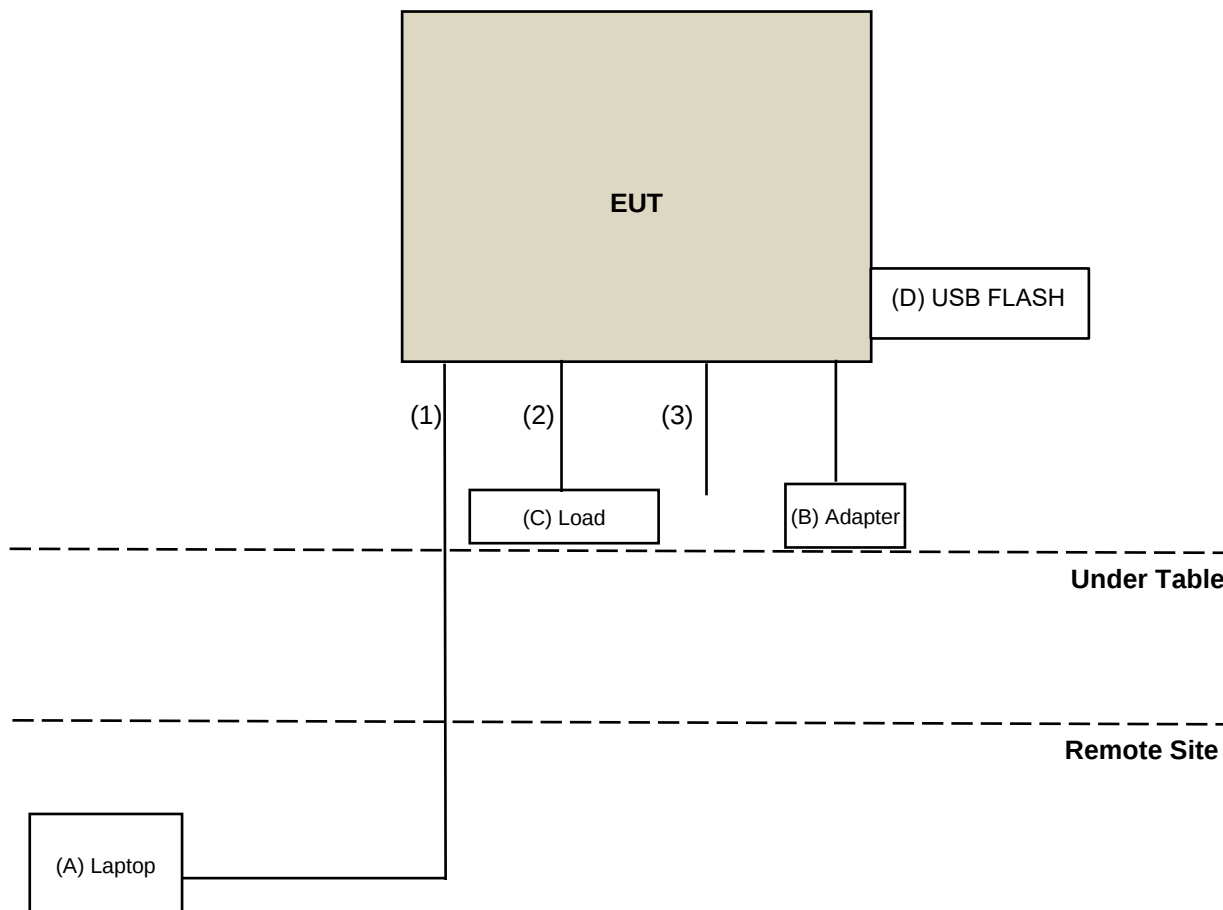

Mode B

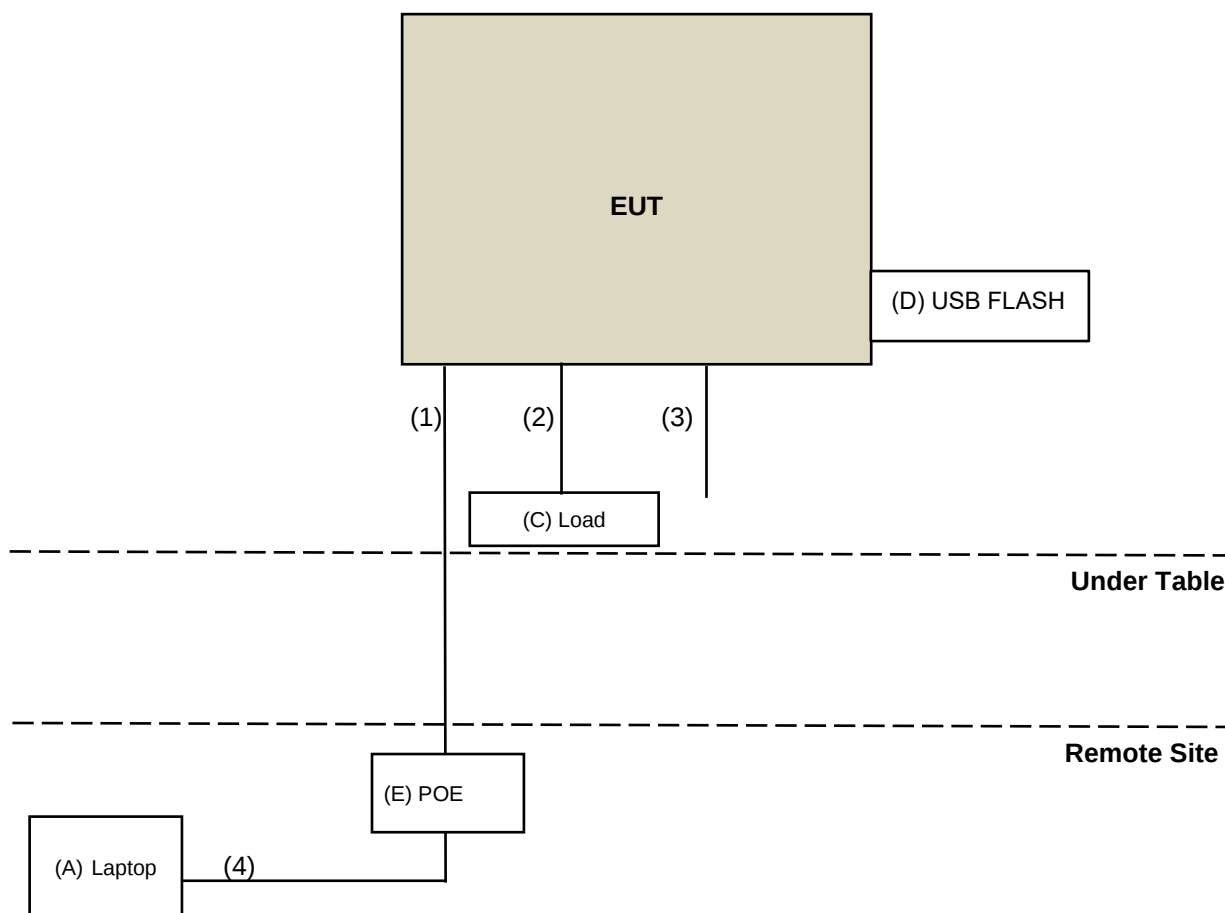

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	X260 4G	PC0ECUAT	N/A	Provided by Lab
B	Adapter	Asian Power Devices INC.	WA-36W12R	N/A	N/A	Supplied by applicant
C	Load	N/A	N/A	N/A	N/A	Provided by Lab
D	FLASH	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
E	PoE	EnGenius	EPA5006GPR	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	6	N	N	Provided by Lab
2	RJ-45 Cable	1	1.5	N	N	Provided by Lab
3	Console Cable	1	1.5	N	N	Provided by Lab
4	RJ-45 Cable	1	1.5	N	N	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/4/3 ~ 2024/4/6

4.2 Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 6 dB Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Occupied Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	87III	70360742	2023/7/6	2024/7/5
Signal & Spectrum Analyzer R&S	FSV3044	101504	2023/6/5	2024/6/4
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2023/12/19	2024/12/18

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/4/3 ~ 2024/4/6

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance HUBER+SUHNER	E1-011315	13	2023/11/22	2024/11/21
50 ohm terminal resistance	E1-011279	04	2023/11/22	2024/11/21
	E1-011280	05	2023/11/22	2024/11/21
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2023/11/7	2024/11/6
EMI Test Receiver R&S	ESCI	100613	2023/12/4	2024/12/3
Fixed Attenuator Mini-Circuits	HAT-10+	PAD-COND1-01	2024/1/6	2025/1/5
LISN R&S	ESH3-Z5	100311	2023/9/6	2024/9/5
		100312	2023/9/12	2024/9/11
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2024/1/6	2025/1/5
Software BVADT	BVADT_Cond_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2023/8/31	2024/8/30

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2024/3/27

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-160	2023/10/17	2024/10/16
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
MXE EMI Receiver Keysight	N9038A	MY55420137	2023/5/3	2024/5/2
Preamplifier Agilent	8447D	2944A10638	2023/5/7	2024/5/6
Preamplifier EMCI	EMC001340	980201	2023/9/27	2024/9/26
RF Coaxial Cable Woken	8D-FB	Cable-CH9-01	2023/5/7	2024/5/6
Signal & Spectrum Analyzer R&S	FSW43	101867	2023/12/29	2024/12/28
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2024/3/27

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1169	2023/11/12	2024/11/11
	BBHA 9170	9170-480	2023/11/12	2024/11/11
		BBHA9170243	2023/11/12	2024/11/11
MXE EMI Receiver Keysight	N9038A	MY55420137	2023/5/3	2024/5/2
Notch Filter Micro-Tronics	BRM17690	004	2024/1/23	2025/1/22
	BRM50716	060	2023/12/25	2024/12/24
Preamplifier Agilent	8449B	3008A02367	2024/1/6	2025/1/5
Preamplifier EMCI	EMC 184045	980116	2023/9/27	2024/9/26
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2023/7/8	2024/7/7
	EMC102-KM-KM-3000	150929	2023/7/8	2024/7/7
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2024/1/6	2025/1/5
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2024/1/6	2025/1/5
Signal & Spectrum Analyzer R&S	FSW43	101867	2023/12/29	2024/12/28
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2024/2/29 ~ 2024/3/27

5 Limits of Test Items

5.1 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250mW (24 dBm)

Operation Band	Limit
U-NII-3	1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-3	30 dBm/500 kHz

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 Occupied Bandwidth

The results are for reference only.

5.5 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK: 105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK: 122.2 (dBμV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge. ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$


6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



For channel straddling:



6.1.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-2A

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- Perform a single sweep.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

6.2 Power Spectral Density

6.2.1 Test Setup



6.2.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-2A

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- Perform a single sweep.
- Record the max value and add 10 log (1/duty cycle).


For specified measurement bandwidth 500 kHz:

Method SA-2A

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- Perform a single sweep.
- Record the max value and add 10 log (1/duty cycle).

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Occupied Bandwidth

6.4.1 Test Setup




6.4.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.5 Frequency Stability

6.5.1 Test Setup

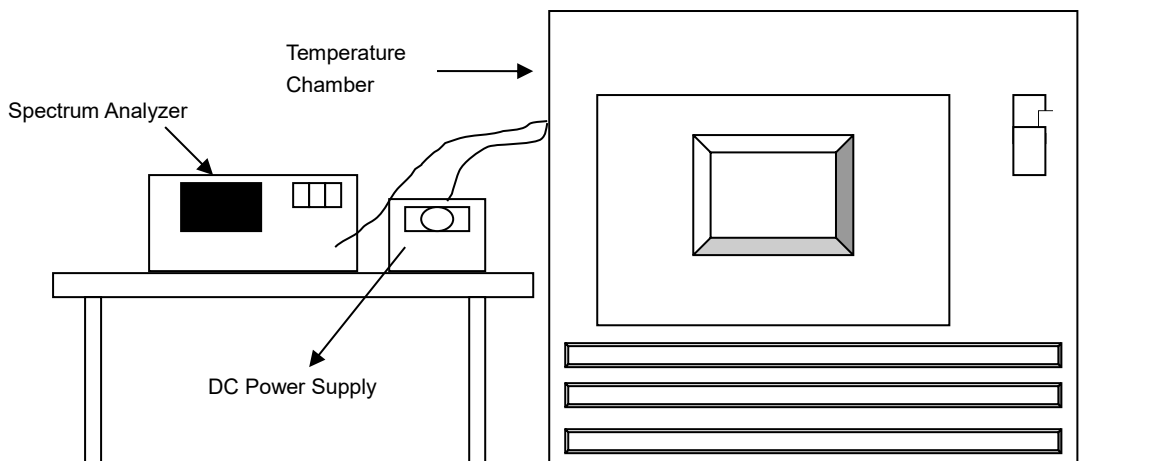


6.5.2 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

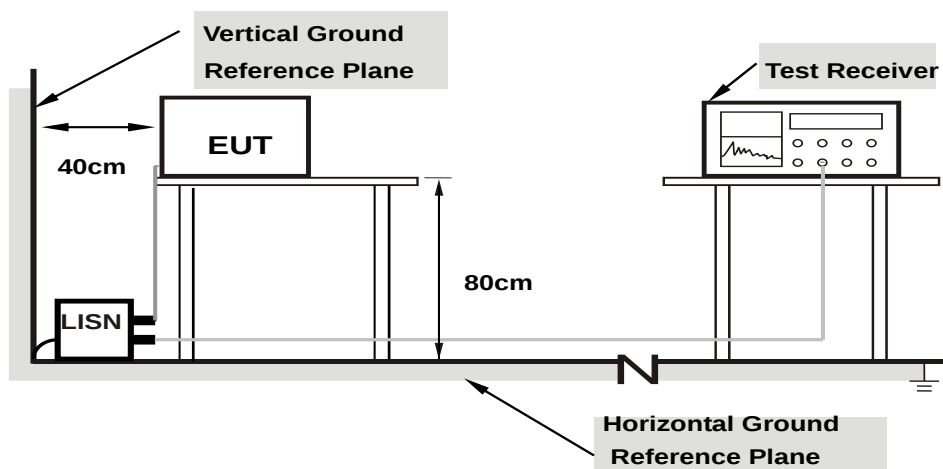

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

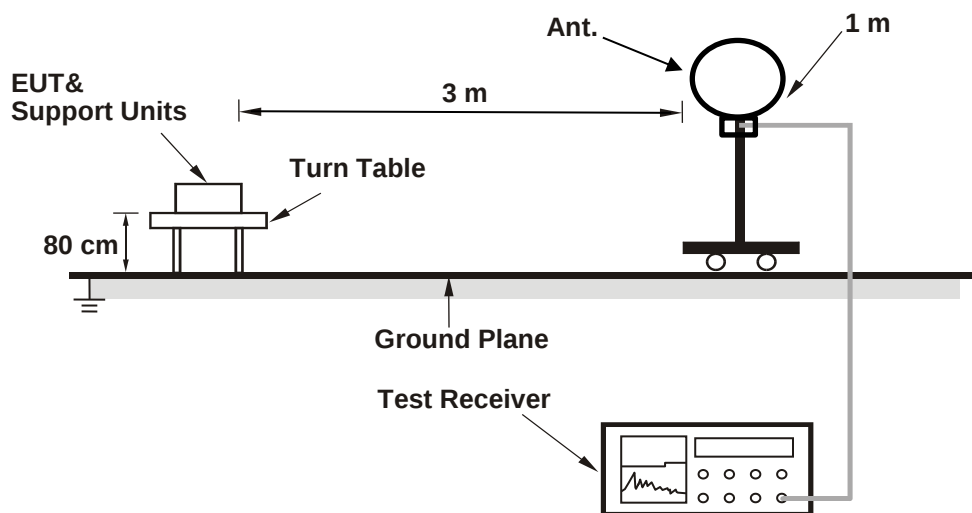

For Radiated emission above 30 MHz

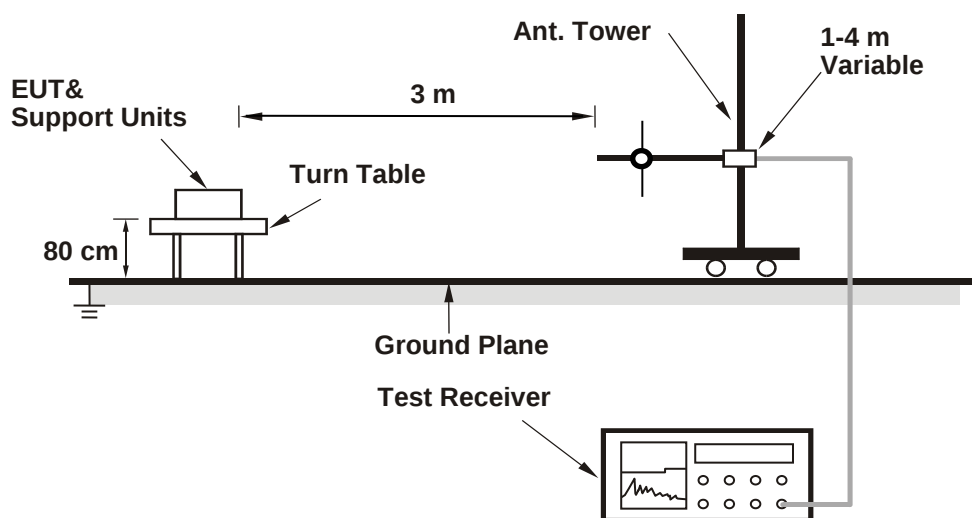

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

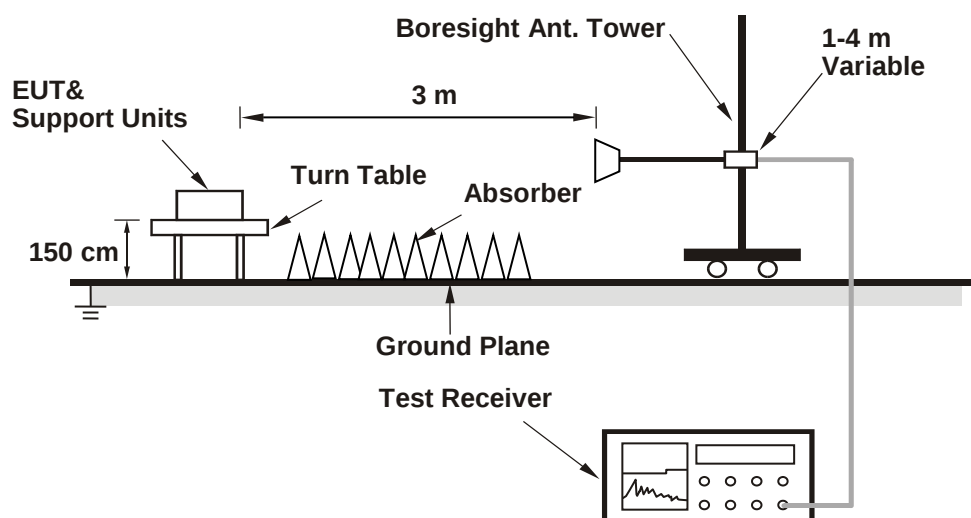

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	54 Vdc	Environmental Conditions:	22°C, 67% RH	Tested By:	Tim Chen
--------------	--------	---------------------------	--------------	------------	----------

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	22.43	21.57	318.534	25.03	30	Pass
40	5200	22.59	22.37	354.135	25.49	30	Pass
48	5240	22.62	22.41	356.991	25.53	30	Pass
149	5745	20.55	20.53	226.481	23.55	30	Pass
157	5785	20.36	19.72	202.399	23.06	30	Pass
165	5825	19.55	19.47	178.669	22.52	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	21.82	21.09	280.583	24.48	30	Pass
40	5200	21.99	21.89	312.65	24.95	30	Pass
48	5240	21.97	21.63	302.944	24.81	30	Pass
149	5745	21.01	20.85	247.801	23.94	30	Pass
157	5785	20.98	19.99	225.084	23.52	30	Pass
165	5825	19.92	19.89	195.674	22.92	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	21.87	21.18	285.035	24.55	30	Pass
46	5230	22.58	22.49	358.553	25.55	30	Pass
151	5755	21.57	21.23	276.288	24.41	30	Pass
159	5795	21.67	21.08	275.126	24.40	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	19.55	19.47	178.669	22.52	30	Pass
155	5775	20.77	19.87	216.45	23.35	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. For U-NII-1, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-3, the maximum gain is 5.5 dBi < 6 dBi, so the output power limit shall not be reduced.

Beamforming Mode

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
36	5180	21.82	21.09	280.583	24.48	27.64	Pass
40	5200	21.99	21.89	312.65	24.95	27.64	Pass
48	5240	21.97	21.63	302.944	24.81	27.64	Pass
149	5745	21.01	20.85	247.801	23.94	27.64	Pass
157	5785	20.98	19.99	225.084	23.52	27.64	Pass
165	5825	19.92	19.89	195.674	22.92	27.64	Pass

Notes:

1. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. For U-NII-1, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
38	5190	21.87	21.18	285.035	24.55	27.64	Pass
46	5230	22.58	22.49	358.553	25.55	27.64	Pass
151	5755	21.57	21.23	276.288	24.41	27.64	Pass
159	5795	21.67	21.08	275.126	24.40	27.64	Pass

Notes:

1. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. For U-NII-1, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
42	5210	19.55	19.47	178.669	22.52	27.64	Pass
155	5775	20.77	19.87	216.45	23.35	27.64	Pass

Notes:

1. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. For U-NII-1, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the output power limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm.

7.2 Power Spectral Density

Input Power:	54 Vdc	Environmental Conditions:	22°C, 67% RH	Tested By:	Tim Chen
--------------	--------	---------------------------	--------------	------------	----------

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
36	5180	9.61	8.56	0.17	12.30	14.64	Pass
40	5200	10.39	9.46	0.17	13.13	14.64	Pass
48	5240	9.80	9.23	0.17	12.70	14.64	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 8.36 dBi > 6dBi, so the power density limit shall be reduced to $17 - (8.36 - 6) = 14.64$ dBm/MHz.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
36	5180	8.78	7.69	0.23	11.51	14.64	Pass
40	5200	9.62	8.36	0.23	12.28	14.64	Pass
48	5240	9.82	8.50	0.23	12.45	14.64	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 8.36 dBi > 6dBi, so the power density limit shall be reduced to $17 - (8.36 - 6) = 14.64$ dBm/MHz.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
38	5190	6.53	5.50	0.24	9.30	14.64	Pass
46	5230	7.08	6.64	0.24	10.12	14.64	Pass

Notes:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-1, the directional gain is 8.36 dBi > 6dBi, so the power density limit shall be reduced to $17 - (8.36 - 6) = 14.64$ dBm/MHz.

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1				
42	5210	1.18	0.88	0.23	4.27	14.64	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-1, the directional gain is 8.36 dBi > 6dBi, so the power density limit shall be reduced to $17 - (8.36 - 6) = 14.64$ dBm/MHz.

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
149	5745	0.42	-0.56	2.97	0.17	5.36	27.64	Pass
157	5785	0.25	-1.37	2.53	0.17	4.92	27.64	Pass
165	5825	-0.22	-1.64	2.14	0.17	4.53	27.64	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm/500kHz.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
149	5745	-0.11	-1.06	2.45	0.23	4.90	27.64	Pass
157	5785	-0.38	-1.01	2.33	0.23	4.78	27.64	Pass
165	5825	-1.03	-1.96	1.54	0.23	3.99	27.64	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm/500kHz.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
151	5755	-3.99	-4.42	-1.19	0.24	1.27	27.64	Pass
159	5795	-3.90	-4.59	-1.22	0.24	1.24	27.64	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
3. For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm/500kHz.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)		Total PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1					
155	5775	-6.98	-7.84	-4.38	0.23	-1.93	27.64	Pass


Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain = $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- For U-NII-3, the directional gain is 8.36 dBi > 6 dBi, so the power density limit shall be reduced to $30 - (8.36 - 6) = 27.64$ dBm/500kHz.


Spectrum Plot of Maximum Value

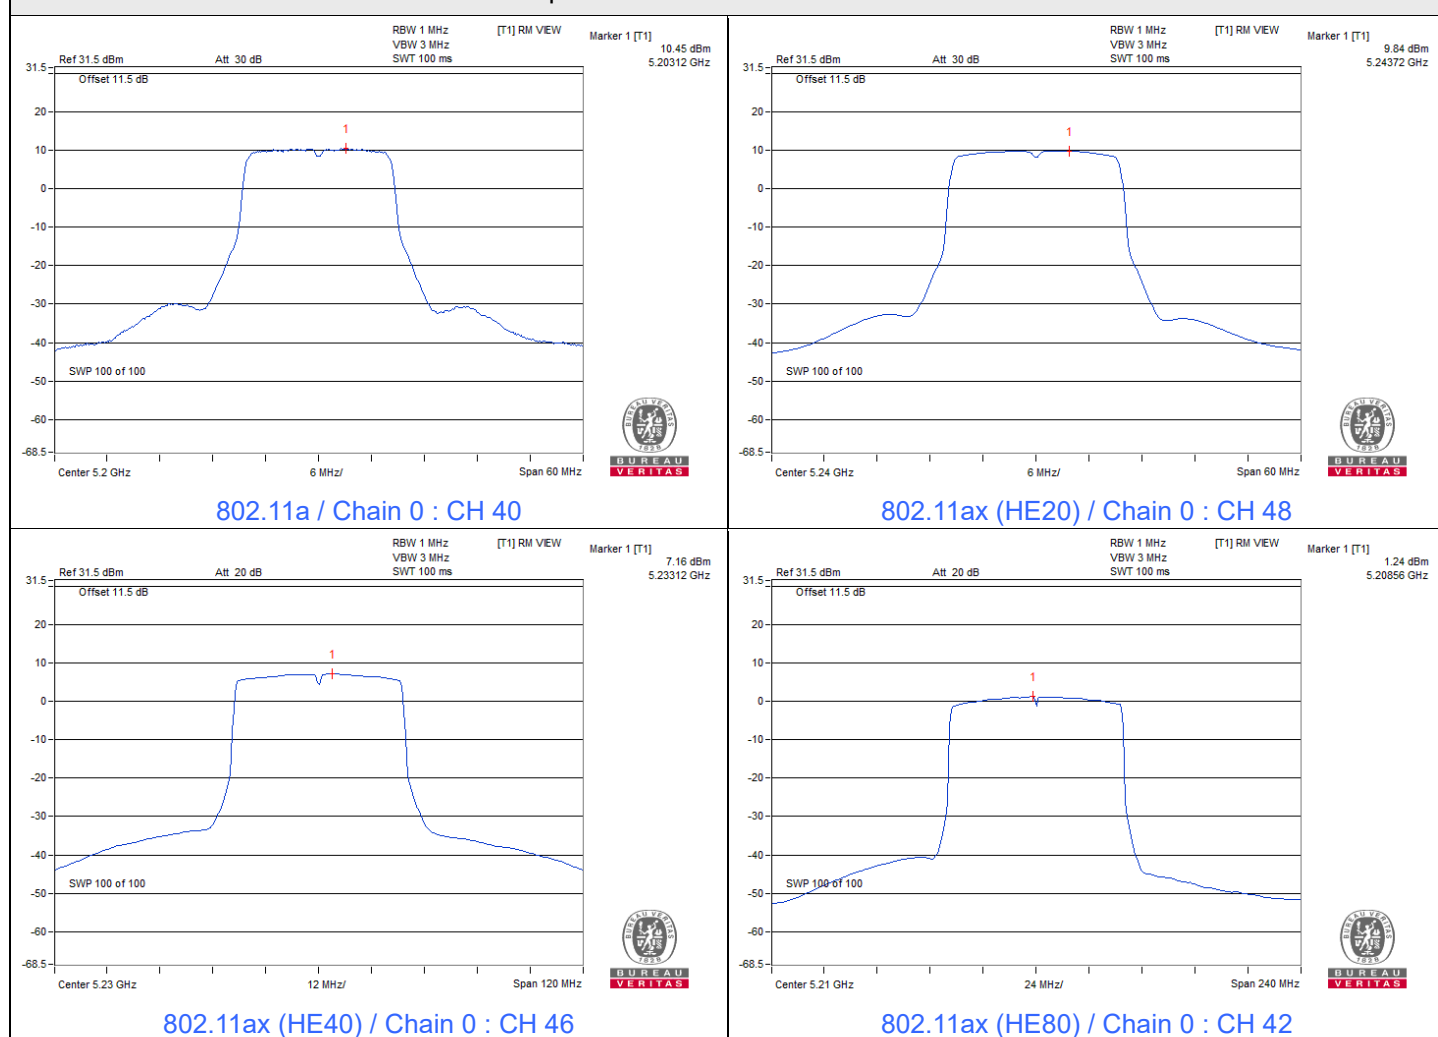


Spectrum Plot of Maximum Value

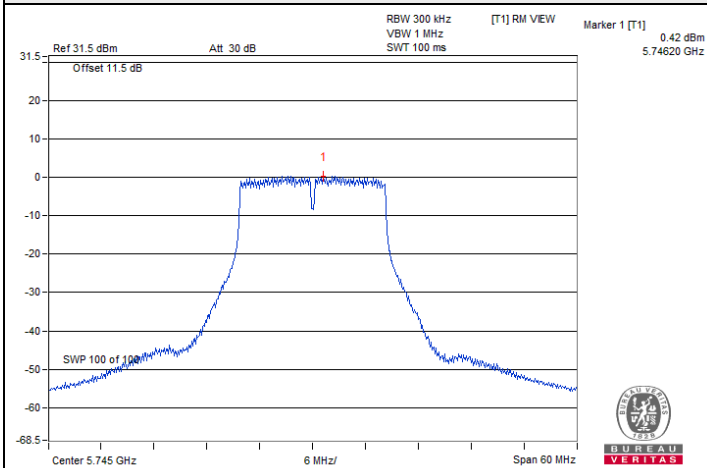


802.11a / Chain 0 : CH 149

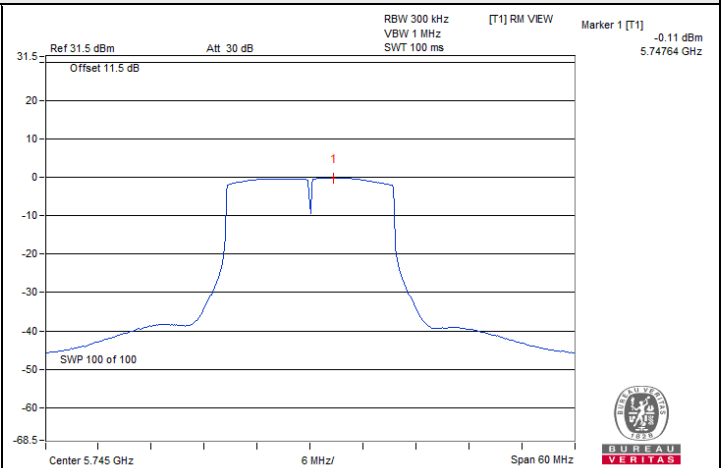

802.11ax (HE20) / Chain 0 : CH 149

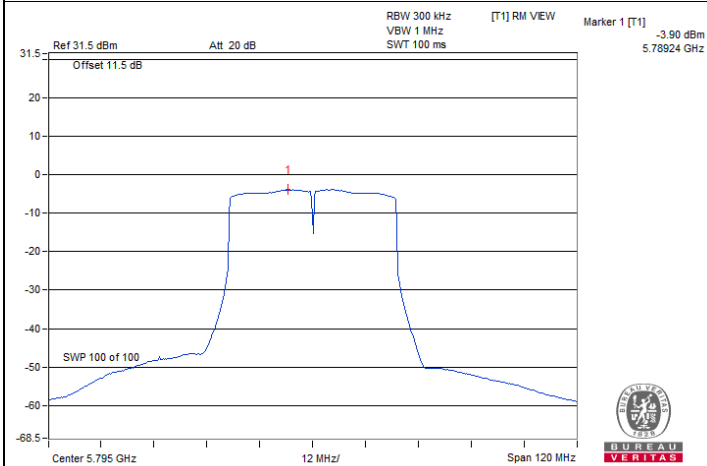

802.11ax (HE40) / Chain 0 : CH 159

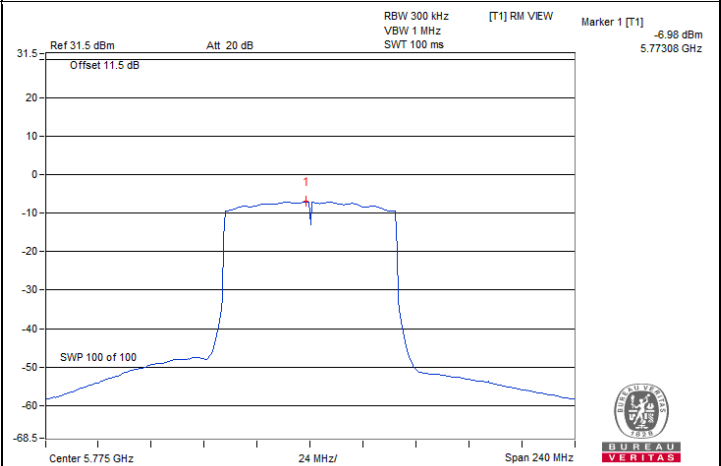

802.11ax (HE80) / Chain 0 : CH 155

7.3 6 dB Bandwidth

Input Power:	54 Vdc	Environmental Conditions:	22°C, 67% RH	Tested By:	Tim Chen
--------------	--------	---------------------------	--------------	------------	----------

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
149	5745	15.68	15.40	0.5	Pass
157	5785	15.75	16.09	0.5	Pass
165	5825	16.07	16.32	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
149	5745	18.16	18.60	0.5	Pass
157	5785	18.72	18.52	0.5	Pass
165	5825	18.10	18.26	0.5	Pass


802.11ax (HE40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
151	5755	37.69	37.81	0.5	Pass
159	5795	37.46	37.62	0.5	Pass


802.11ax (HE80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
155	5775	75.39	75.44	0.5	Pass


Spectrum Plot of Minimum Value

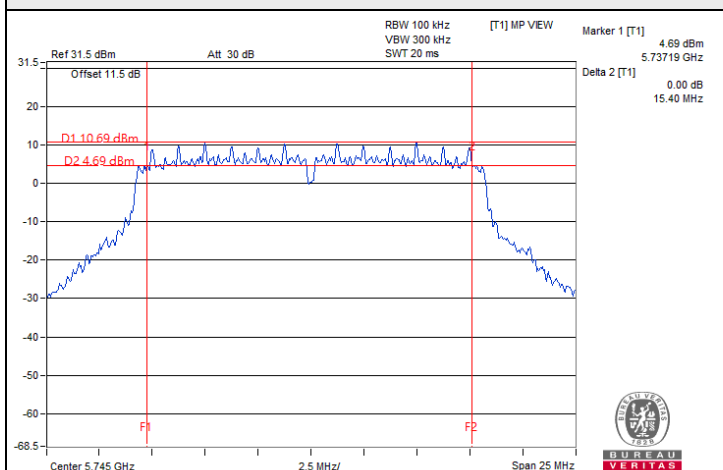


802.11a / Chain 1 : CH 149

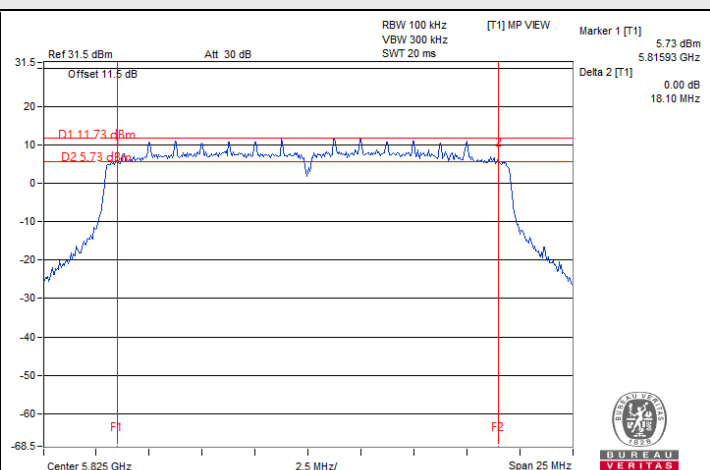

802.11ax (HE20) / Chain 0 : CH 165

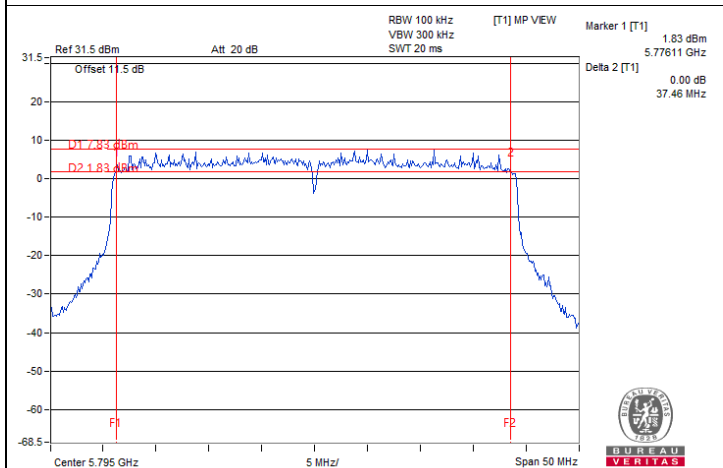

802.11ax (HE40) / Chain 0 : CH 159

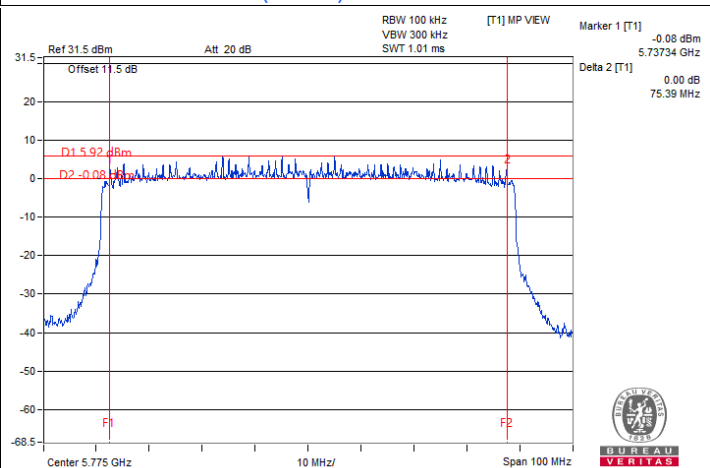

802.11ax (HE80) / Chain 0 : CH 155

7.4 Occupied Bandwidth

Input Power:	54 Vdc	Environmental Conditions:	22°C, 67% RH	Tested By:	Tim Chen
--------------	--------	---------------------------	--------------	------------	----------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.44	16.44
40	5200	16.44	16.44
48	5240	16.44	16.44
149	5745	16.44	16.44
157	5785	16.44	16.44
165	5825	16.44	16.44

802.11ax (HE20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.84	19.08
40	5200	18.84	19.08
48	5240	18.84	18.96
149	5745	19.08	18.84
157	5785	19.08	18.84
165	5825	18.96	18.84


802.11ax (HE40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	37.92	37.92
46	5230	37.92	37.92
151	5755	38.16	37.92
159	5795	37.68	37.92


802.11ax (HE80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	77.28	77.28
155	5775	77.28	77.04


Spectrum Plot of Maximum Value

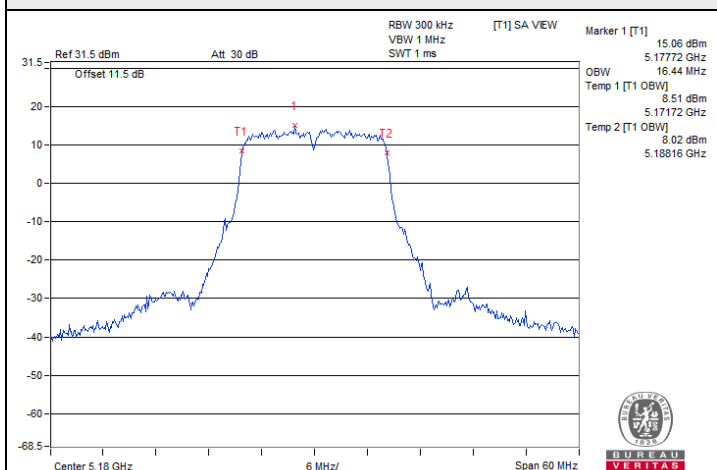


802.11a / Chain 0 : CH 36

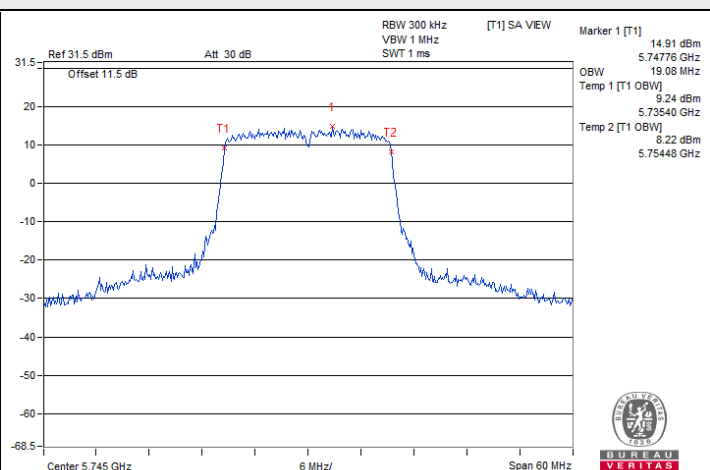

802.11ax (HE20) / Chain 0 : CH 149

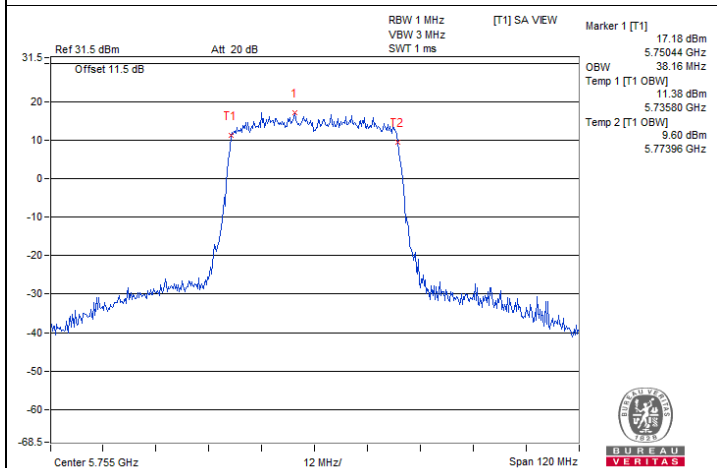


802.11ax (HE40) / Chain 0 : CH 151

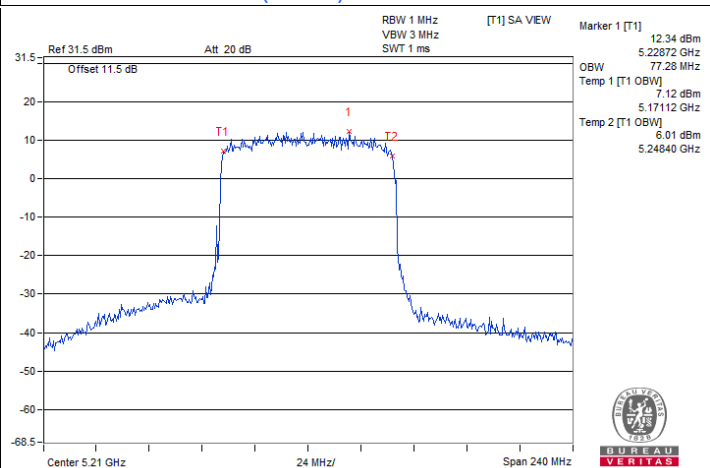


802.11ax (HE80) / Chain 0 : CH 42

Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

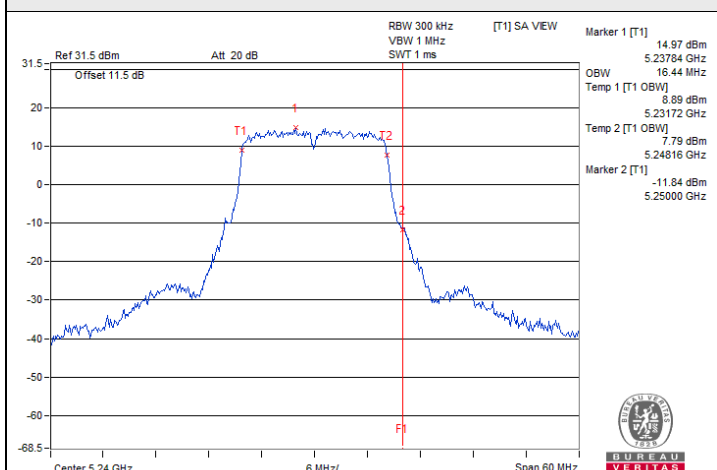


802.11a / Chain 0 : CH 48

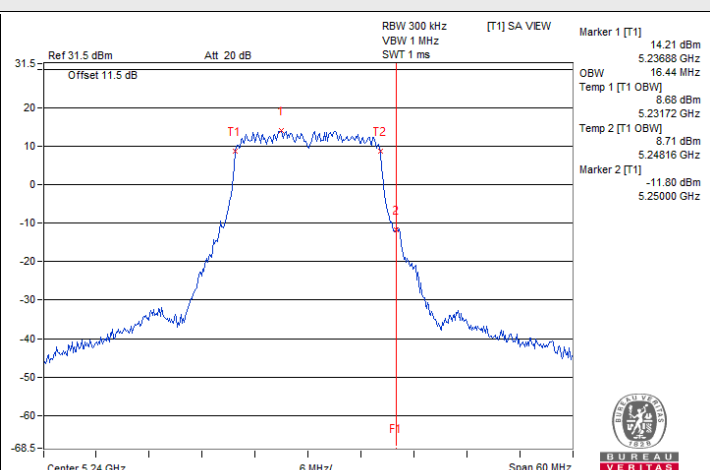


802.11a / Chain 1 : CH 48


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2A)

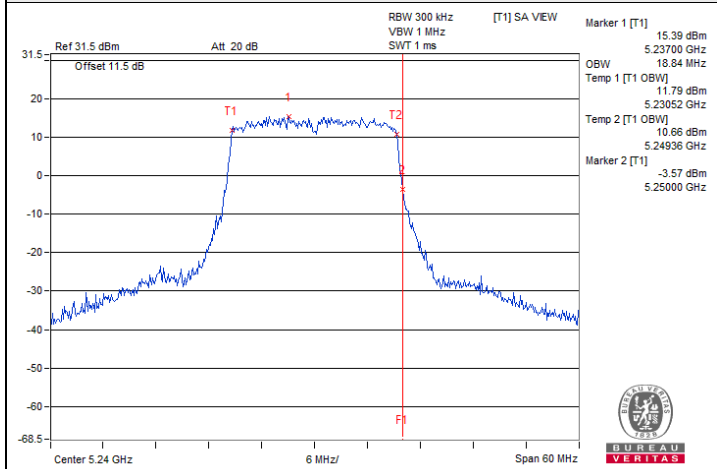


802.11ax (HE20) / Chain 0 : CH 48

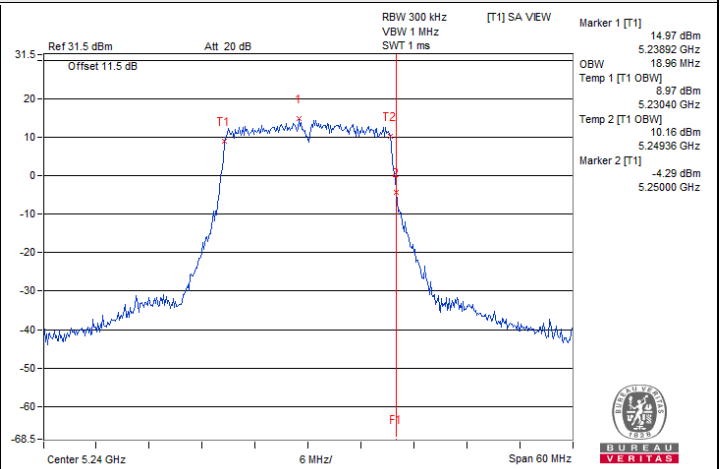


802.11ax (HE20) / Chain 1 : CH 48

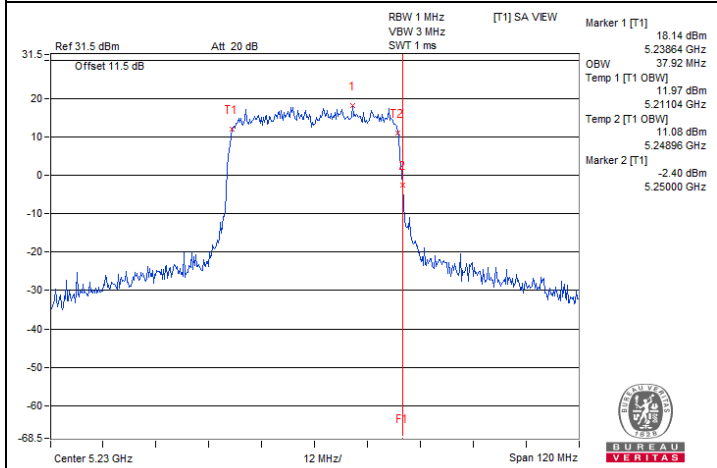


802.11ax (HE40) / Chain 0 : CH 46

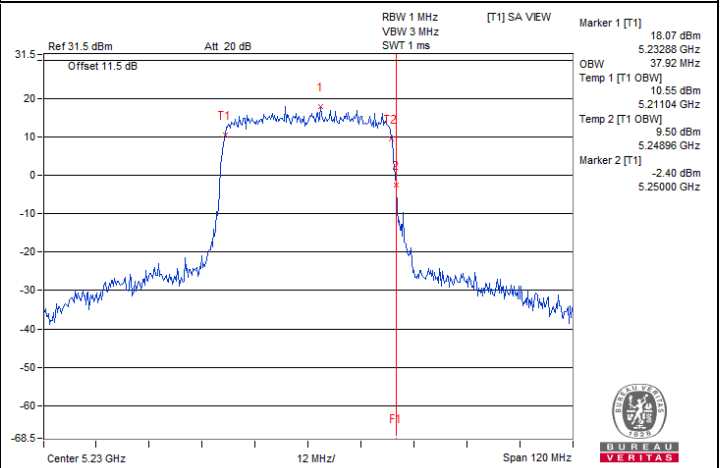

802.11ax (HE40) / Chain 1 : CH 46

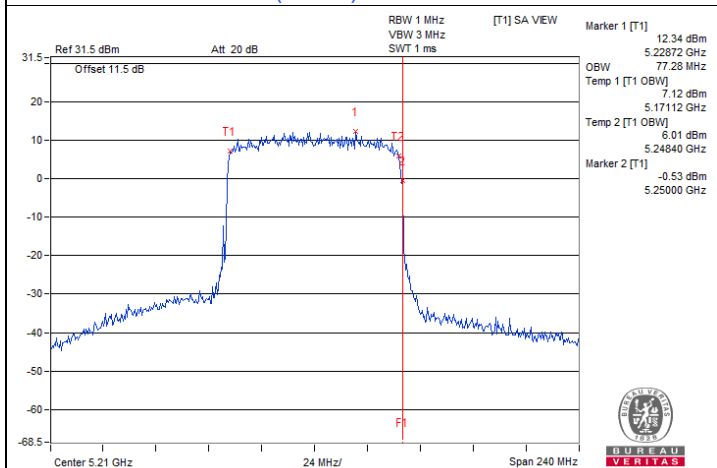


802.11ax (HE80) / Chain 0 : CH 42

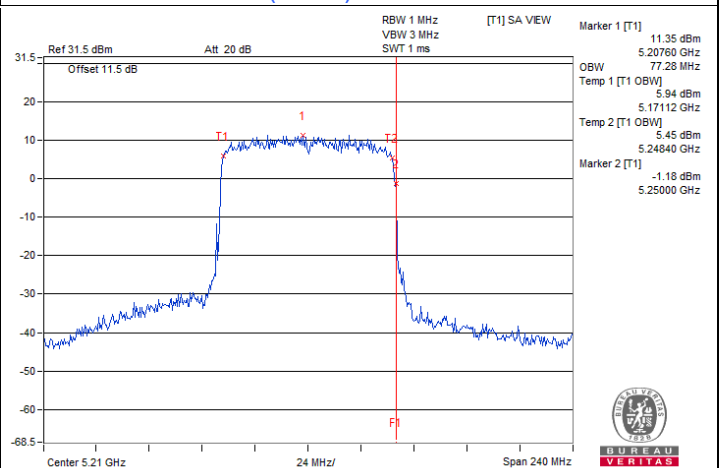


802.11ax (HE80) / Chain 1 : CH 42


Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

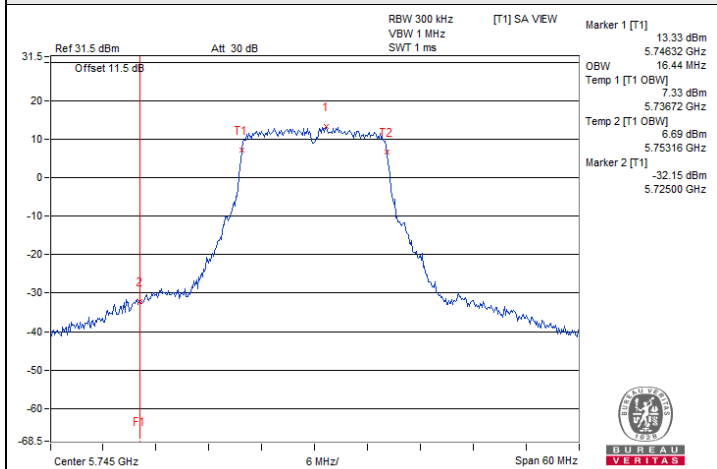


802.11a / Chain 0 : CH 149

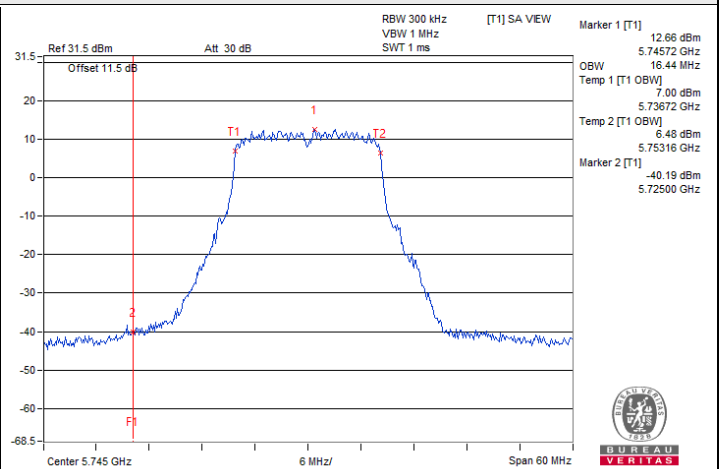


802.11a / Chain 1 : CH 149

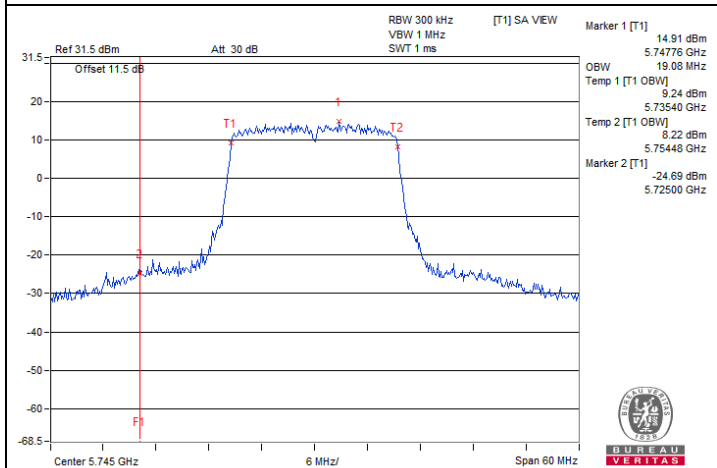


802.11ax (HE20) / Chain 0 : CH 149

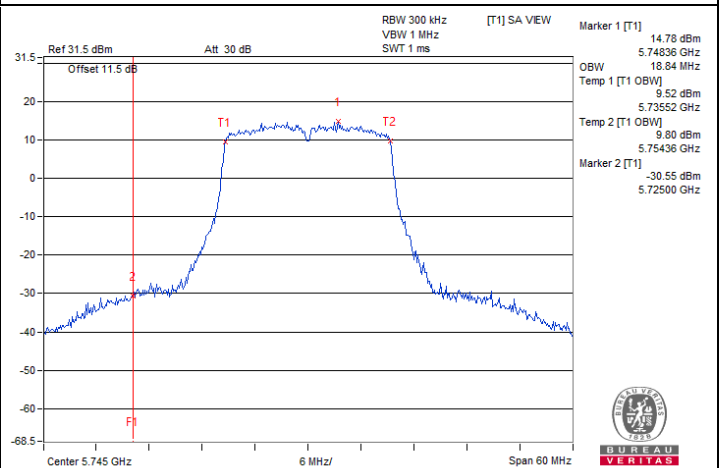

802.11ax (HE20) / Chain 1 : CH 149

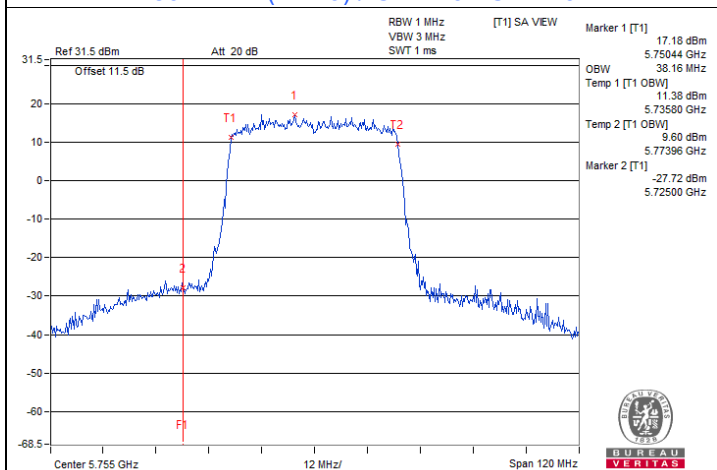


802.11ax (HE40) / Chain 0 : CH 151

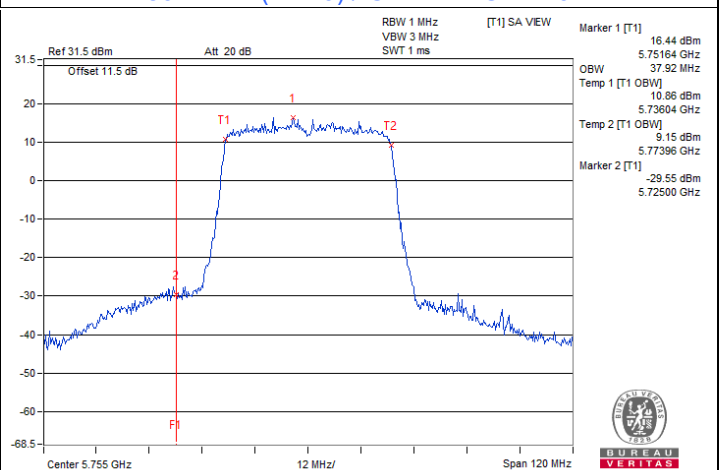


802.11ax (HE40) / Chain 1 : CH 151

Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C)

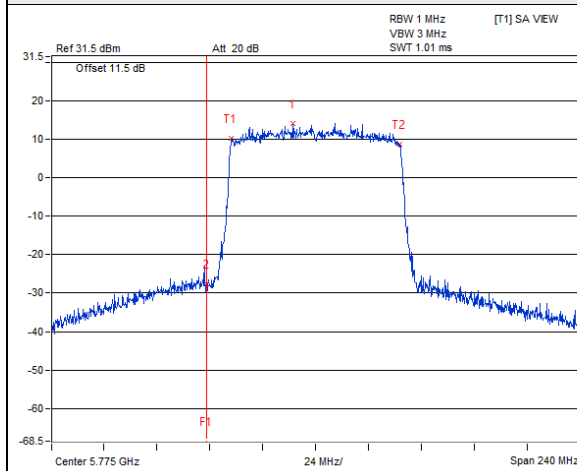

802.11ax (HE80) / Chain 0 : CH 155

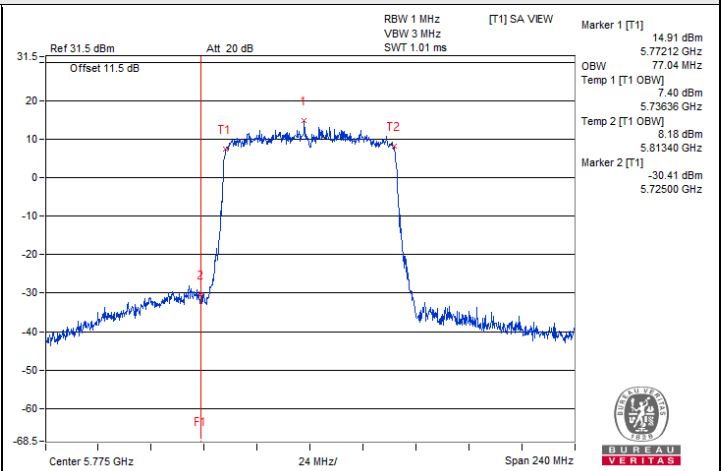

802.11ax (HE80) / Chain 1 : CH 155

7.5 Frequency Stability

Input Power:	54 Vdc	Environmental Conditions:	22°C, 67% RH	Tested By:	Tim Chen
--------------	--------	---------------------------	--------------	------------	----------

Frequency Stability Versus Temperature									
Operating Frequency: 5180 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
50	54	5179.9815	Pass	5179.9856	Pass	5179.9845	Pass	5179.9836	Pass
40	54	5179.991	Pass	5179.9921	Pass	5179.9904	Pass	5179.9903	Pass
30	54	5179.9868	Pass	5179.9843	Pass	5179.9865	Pass	5179.9853	Pass
20	54	5180.0231	Pass	5180.0249	Pass	5180.0235	Pass	5180.0239	Pass
10	54	5180.0062	Pass	5180.0059	Pass	5180.0053	Pass	5180.0072	Pass
0	54	5180.0039	Pass	5180.0009	Pass	5180.0034	Pass	5180.004	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
Temp. (°C)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	62.1	5180.0156	Pass	5180.0159	Pass	5180.0174	Pass	5180.0144	Pass
	54	5180.0231	Pass	5180.0249	Pass	5180.0235	Pass	5180.0239	Pass
	45.9	5180.0262	Pass	5180.0271	Pass	5180.0266	Pass	5180.0244	Pass

7.6 AC Power Conducted Emissions


Mode A

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.68	30.22	22.57	39.90	32.25	65.78	55.78	-25.88	-23.53
2	0.21800	9.71	28.18	19.49	37.89	29.20	62.89	52.89	-25.00	-23.69
3	0.36835	9.80	34.98	27.97	44.78	37.77	58.54	48.54	-13.76	-10.77
4	4.99000	10.00	14.43	6.48	24.43	16.48	56.00	46.00	-31.57	-29.52
5	13.42600	10.12	15.20	8.76	25.32	18.88	60.00	50.00	-34.68	-31.12
6	22.35400	10.21	11.11	4.77	21.32	14.98	60.00	50.00	-38.68	-35.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

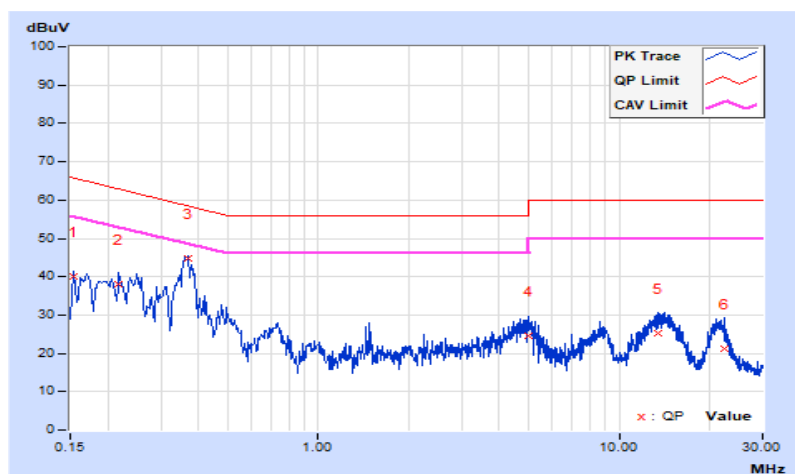


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	9.69	28.47	19.90	38.16	29.59	64.77	54.77	-26.61	-25.18
2	0.25800	9.74	26.12	18.27	35.86	28.01	61.50	51.50	-25.64	-23.49
3	0.36545	9.82	32.11	25.37	41.93	35.19	58.60	48.60	-16.67	-13.41
4	4.81800	10.01	14.45	6.58	24.46	16.59	56.00	46.00	-31.54	-29.41
5	14.23800	10.18	15.88	9.81	26.06	19.99	60.00	50.00	-33.94	-30.01
6	21.58200	10.31	13.25	7.00	23.56	17.31	60.00	50.00	-36.44	-32.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

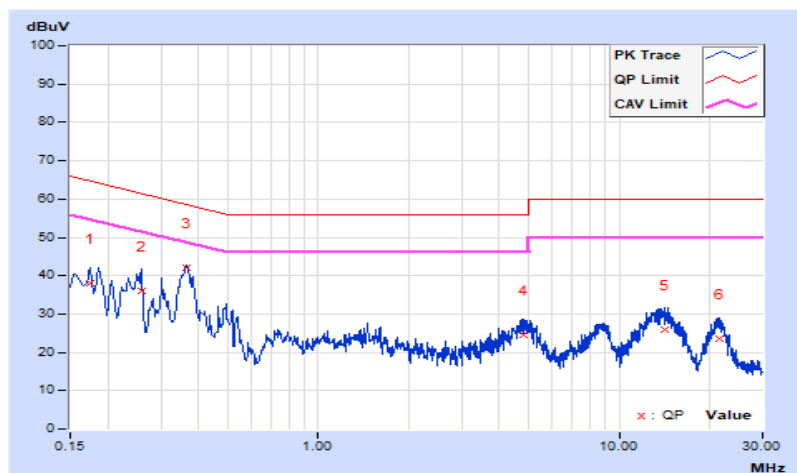


Mode B

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.63	35.92	22.06	45.55	31.69	66.00	56.00	-20.45	-24.31
2	0.19000	9.64	29.42	19.26	39.06	28.90	64.04	54.04	-24.98	-25.14
3	0.23800	9.65	23.76	15.49	33.41	25.14	62.17	52.17	-28.76	-27.03
4	0.46200	9.68	33.20	28.60	42.88	38.28	56.66	46.66	-13.78	-8.38
5	2.12200	9.73	23.11	18.19	32.84	27.92	56.00	46.00	-23.16	-18.08
6	10.69400	9.80	19.88	14.99	29.68	24.79	60.00	50.00	-30.32	-25.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

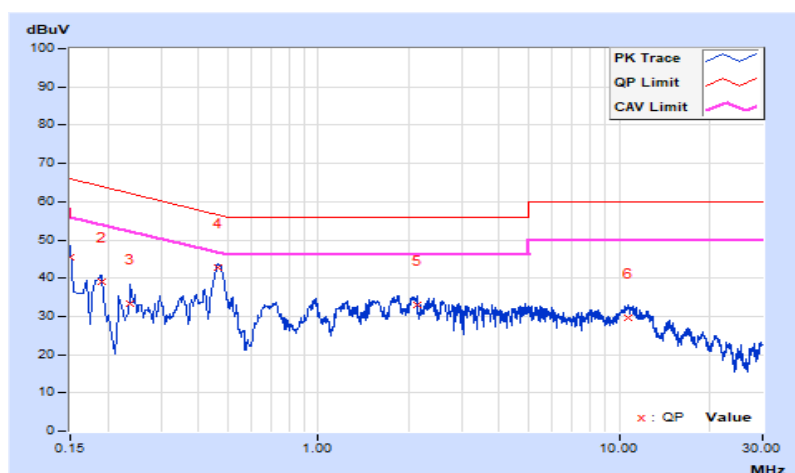


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.63	30.03	20.18	39.66	29.81	65.78	55.78	-26.12	-25.97
2	0.17000	9.63	28.52	18.19	38.15	27.82	64.96	54.96	-26.81	-27.14
3	0.23800	9.65	23.13	14.47	32.78	24.12	62.17	52.17	-29.39	-28.05
4	0.46200	9.68	31.87	27.28	41.55	36.96	56.66	46.66	-15.11	-9.70
5	5.31400	9.76	17.04	10.49	26.80	20.25	60.00	50.00	-33.20	-29.75
6	11.36200	9.83	16.59	11.27	26.42	21.10	60.00	50.00	-33.58	-28.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

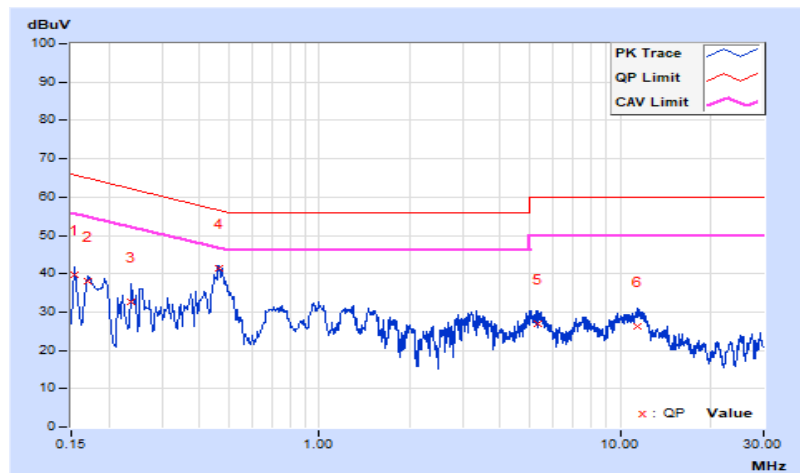

7.7 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	37.5 QP	40.0	-2.5	1.01 H	18	48.3	-10.8
2	124.09	33.3 QP	43.5	-10.2	1.51 H	81	44.3	-11.0
3	178.41	41.0 QP	43.5	-2.5	1.01 H	114	51.0	-10.0
4	250.19	37.4 QP	46.0	-8.6	1.01 H	114	46.8	-9.4
5	514.03	26.4 QP	46.0	-19.6	2.00 H	163	30.0	-3.6
6	653.71	30.0 QP	46.0	-16.0	1.51 H	307	30.7	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

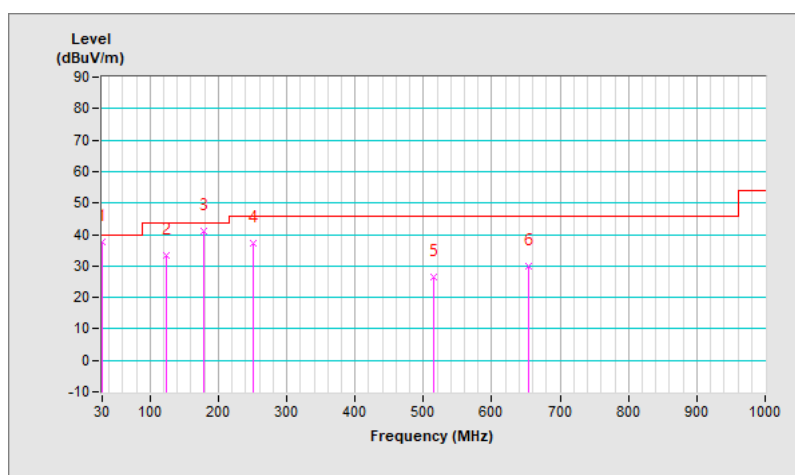


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.79	39.0 QP	40.0	-1.0	1.01 V	215	49.3	-10.3
2	70.74	33.5 QP	40.0	-6.5	1.01 V	198	44.8	-11.3
3	124.09	37.2 QP	43.5	-6.3	1.01 V	14	48.2	-11.0
4	249.22	27.6 QP	46.0	-18.4	2.00 V	296	37.1	-9.5
5	592.60	28.1 QP	46.0	-17.9	1.01 V	159	30.0	-1.9
6	862.26	32.4 QP	46.0	-13.6	2.00 V	217	29.0	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

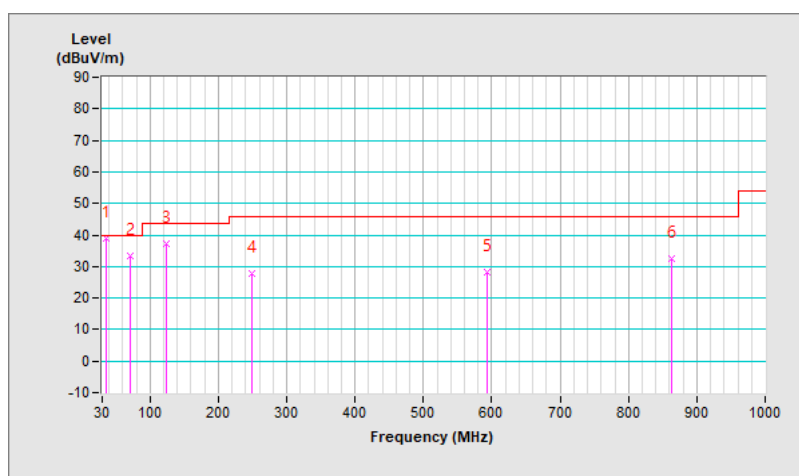


Mode B

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	33.6 QP	40.0	-6.4	1.00 H	304	44.4	-10.8
2	83.35	29.6 QP	40.0	-10.4	1.99 H	286	43.9	-14.3
3	124.09	35.3 QP	43.5	-8.2	1.50 H	288	46.3	-11.0
4	145.43	29.5 QP	43.5	-14.0	1.50 H	266	38.6	-9.1
5	303.54	29.4 QP	46.0	-16.6	1.50 H	281	36.9	-7.5
6	629.46	28.5 QP	46.0	-17.5	1.50 H	340	29.4	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

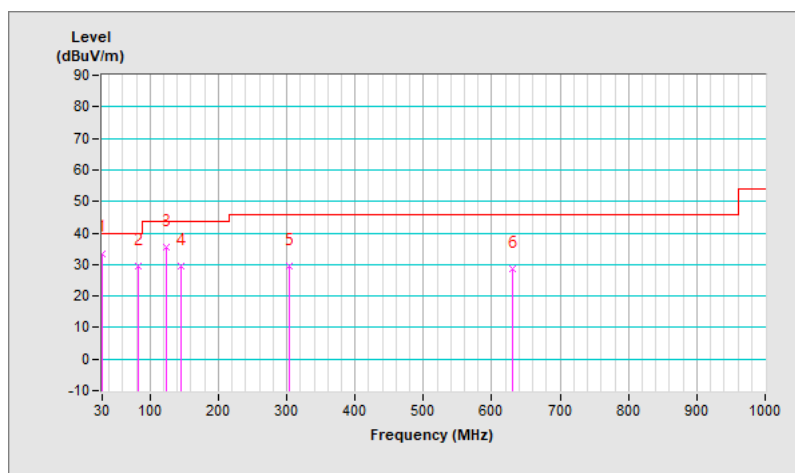


RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.73	38.9 QP	40.0	-1.1	1.00 V	136	49.0	-10.1
2	80.44	31.9 QP	40.0	-8.1	2.00 V	196	45.7	-13.8
3	124.09	37.6 QP	43.5	-5.9	1.00 V	1	48.6	-11.0
4	459.71	24.6 QP	46.0	-21.4	1.50 V	27	29.1	-4.5
5	517.91	25.4 QP	46.0	-20.6	1.00 V	18	28.9	-3.5
6	693.48	28.5 QP	46.0	-17.5	1.00 V	192	28.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

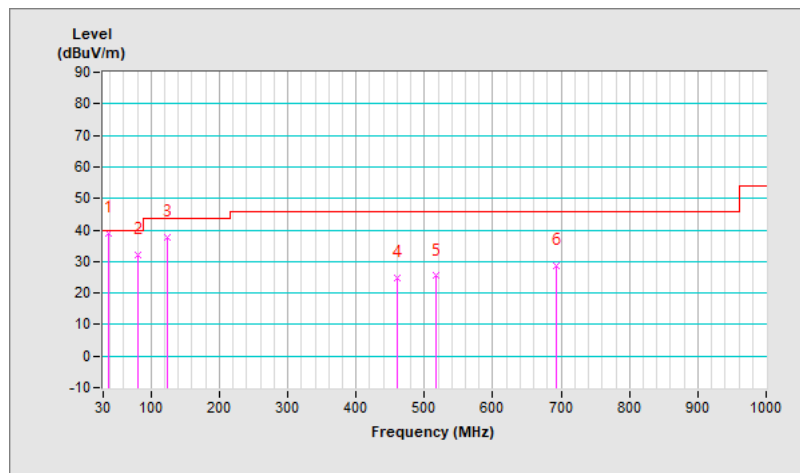

7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	1.67 H	22	44.3	20.7
2	5150.00	52.2 AV	54.0	-1.8	1.67 H	22	31.5	20.7
3	*5180.00	120.1 PK			1.67 H	22	79.5	40.6
4	*5180.00	110.0 AV			1.67 H	22	69.4	40.6
5	#10360.00	63.0 PK	68.2	-5.2	2.66 H	104	39.3	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	3.80 V	321	39.9	20.7
2	5150.00	48.2 AV	54.0	-5.8	3.80 V	321	27.5	20.7
3	*5180.00	116.1 PK			3.80 V	321	75.5	40.6
4	*5180.00	106.1 AV			3.80 V	321	65.5	40.6
5	#10360.00	62.8 PK	68.2	-5.4	3.10 V	145	39.1	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.0 PK			1.71 H	22	82.5	40.5
2	*5200.00	112.6 AV			1.71 H	22	72.1	40.5
3	#10400.00	62.8 PK	68.2	-5.4	2.65 H	103	39.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.7 PK			3.61 V	309	78.2	40.5
2	*5200.00	108.3 AV			3.61 V	309	67.8	40.5
3	#10400.00	62.7 PK	68.2	-5.5	3.15 V	148	38.9	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.0 PK			1.78 H	26	82.5	40.5
2	*5240.00	113.0 AV			1.78 H	26	72.5	40.5
3	5350.00	60.8 PK	74.0	-13.2	1.78 H	26	40.5	20.3
4	5350.00	48.6 AV	54.0	-5.4	1.78 H	26	28.3	20.3
5	#10480.00	63.2 PK	68.2	-5.0	2.66 H	107	38.7	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.5 PK			3.78 V	320	78.0	40.5
2	*5240.00	108.3 AV			3.78 V	320	67.8	40.5
3	5350.00	58.7 PK	74.0	-15.3	3.78 V	320	38.4	20.3
4	5350.00	48.5 AV	54.0	-5.5	3.78 V	320	28.2	20.3
5	#10480.00	63.0 PK	68.2	-5.2	3.11 V	146	38.5	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	62.3 PK	68.2	-5.9	1.97 H	309	40.9	21.4
2	*5745.00	123.3 PK			1.97 H	309	82.0	41.3
3	*5745.00	113.4 AV			1.97 H	309	72.1	41.3
4	#5987.20	61.1 PK	68.2	-7.1	1.97 H	309	38.8	22.3
5	11490.00	65.3 PK	74.0	-8.7	2.57 H	119	39.5	25.8
6	11490.00	51.5 AV	54.0	-2.5	2.57 H	119	25.7	25.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	60.0 PK	68.2	-8.2	1.74 V	16	38.5	21.5
2	*5745.00	119.3 PK			1.74 V	16	78.0	41.3
3	*5745.00	109.1 AV			1.74 V	16	67.8	41.3
4	#5965.20	62.1 PK	68.2	-6.1	1.74 V	16	39.8	22.3
5	11490.00	64.9 PK	74.0	-9.1	3.06 V	155	39.1	25.8
6	11490.00	51.1 AV	54.0	-2.9	3.06 V	155	25.3	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	61.7 PK	68.2	-6.5	2.04 H	311	40.2	21.5
2	*5785.00	125.0 PK			2.04 H	311	83.6	41.4
3	*5785.00	114.7 AV			2.04 H	311	73.3	41.4
4	#5997.60	60.9 PK	68.2	-7.3	2.04 H	311	38.6	22.3
5	11570.00	64.5 PK	74.0	-9.5	2.66 H	124	38.9	25.6
6	11570.00	51.1 AV	54.0	-2.9	2.66 H	124	25.5	25.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.00	60.6 PK	68.2	-7.6	1.71 V	15	39.3	21.3
2	*5785.00	119.2 PK			1.71 V	15	77.8	41.4
3	*5785.00	108.9 AV			1.71 V	15	67.5	41.4
4	#5933.60	61.9 PK	68.2	-6.3	1.71 V	15	39.8	22.1
5	11570.00	64.1 PK	74.0	-9.9	3.18 V	144	38.5	25.6
6	11570.00	50.8 AV	54.0	-3.2	3.18 V	144	25.2	25.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.80	61.5 PK	68.2	-6.7	1.94 H	313	40.2	21.3
2	*5825.00	125.1 PK			1.94 H	313	83.6	41.5
3	*5825.00	114.9 AV			1.94 H	313	73.4	41.5
4	#5962.80	61.0 PK	68.2	-7.2	1.94 H	313	38.7	22.3
5	11650.00	63.6 PK	74.0	-10.4	2.59 H	114	38.6	25.0
6	11650.00	51.0 AV	54.0	-3.0	2.59 H	114	26.0	25.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	60.4 PK	68.2	-7.8	1.79 V	13	39.1	21.3
2	*5825.00	118.1 PK			1.79 V	13	76.6	41.5
3	*5825.00	107.9 AV			1.79 V	13	66.4	41.5
4	#5938.80	60.4 PK	68.2	-7.8	1.79 V	13	38.2	22.2
5	11650.00	63.3 PK	74.0	-10.7	2.98 V	154	38.3	25.0
6	11650.00	50.6 AV	54.0	-3.4	2.98 V	154	25.6	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.67 H	22	45.0	20.7
2	5150.00	52.9 AV	54.0	-1.1	1.67 H	22	32.2	20.7
3	*5180.00	121.9 PK			1.67 H	22	81.3	40.6
4	*5180.00	109.3 AV			1.67 H	22	68.7	40.6
5	#10360.00	63.0 PK	68.2	-5.2	2.67 H	103	39.3	23.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	3.67 V	311	39.1	20.7
2	5150.00	48.8 AV	54.0	-5.2	3.67 V	311	28.1	20.7
3	*5180.00	118.6 PK			3.67 V	311	78.0	40.6
4	*5180.00	105.3 AV			3.67 V	311	64.7	40.6
5	#10360.00	62.8 PK	68.2	-5.4	3.05 V	148	39.1	23.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.8 PK			1.58 H	24	84.3	40.5
2	*5200.00	111.9 AV			1.58 H	24	71.4	40.5
3	#10400.00	63.2 PK	68.2	-5.0	2.65 H	107	39.4	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	120.3 PK			3.68 V	319	79.8	40.5
2	*5200.00	107.4 AV			3.68 V	319	66.9	40.5
3	#10400.00	62.9 PK	68.2	-5.3	3.14 V	145	39.1	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	124.4 PK			1.62 H	22	83.9	40.5
2	*5240.00	112.4 AV			1.62 H	22	71.9	40.5
3	5350.00	60.9 PK	74.0	-13.1	1.62 H	22	40.6	20.3
4	5350.00	48.4 AV	54.0	-5.6	1.62 H	22	28.1	20.3
5	#10480.00	63.9 PK	68.2	-4.3	2.67 H	105	39.4	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.3 PK			3.73 V	307	80.8	40.5
2	*5240.00	108.0 AV			3.73 V	307	67.5	40.5
3	5350.00	59.3 PK	74.0	-14.7	3.73 V	307	39.0	20.3
4	5350.00	47.8 AV	54.0	-6.2	3.73 V	307	27.5	20.3
5	#10480.00	63.7 PK	68.2	-4.5	3.05 V	144	39.2	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.80	62.0 PK	68.2	-6.2	1.98 H	310	40.5	21.5
2	*5745.00	126.0 PK			1.98 H	310	84.7	41.3
3	*5745.00	112.9 AV			1.98 H	310	71.6	41.3
4	#5931.60	61.4 PK	68.2	-6.8	1.98 H	310	39.3	22.1
5	11490.00	65.2 PK	74.0	-8.8	2.54 H	110	39.4	25.8
6	11490.00	51.7 AV	54.0	-2.3	2.54 H	110	25.9	25.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.20	61.0 PK	68.2	-7.2	1.71 V	12	39.8	21.2
2	*5745.00	120.7 PK			1.71 V	12	79.4	41.3
3	*5745.00	108.0 AV			1.71 V	12	66.7	41.3
4	#5990.80	61.1 PK	68.2	-7.1	1.71 V	12	38.8	22.3
5	11490.00	64.7 PK	74.0	-9.3	3.05 V	149	38.9	25.8
6	11490.00	51.3 AV	54.0	-2.7	3.05 V	149	25.5	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.40	61.6 PK	68.2	-6.6	2.04 H	311	40.4	21.2
2	*5785.00	126.3 PK			2.04 H	311	84.9	41.4
3	*5785.00	113.8 AV			2.04 H	311	72.4	41.4
4	#5944.00	61.7 PK	68.2	-6.5	2.04 H	311	39.5	22.2
5	11570.00	63.8 PK	74.0	-10.2	2.69 H	120	38.2	25.6
6	11570.00	51.0 AV	54.0	-3.0	2.69 H	120	25.4	25.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.80	60.7 PK	68.2	-7.5	1.72 V	14	39.5	21.2
2	*5785.00	121.2 PK			1.72 V	14	79.8	41.4
3	*5785.00	108.3 AV			1.72 V	14	66.9	41.4
4	#5970.40	62.1 PK	68.2	-6.1	1.72 V	14	39.8	22.3
5	11570.00	63.5 PK	74.0	-10.5	3.17 V	154	37.9	25.6
6	11570.00	50.7 AV	54.0	-3.3	3.17 V	154	25.1	25.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.40	61.9 PK	68.2	-6.3	2.14 H	313	40.5	21.4
2	*5825.00	126.6 PK			2.14 H	313	85.1	41.5
3	*5825.00	114.0 AV			2.14 H	313	72.5	41.5
4	#5986.40	61.7 PK	68.2	-6.5	2.14 H	313	39.4	22.3
5	11650.00	64.0 PK	74.0	-10.0	2.58 H	104	39.0	25.0
6	11650.00	50.8 AV	54.0	-3.2	2.58 H	104	25.8	25.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	60.4 PK	68.2	-7.8	1.79 V	14	39.0	21.4
2	*5825.00	119.8 PK			1.79 V	14	78.3	41.5
3	*5825.00	107.4 AV			1.79 V	14	65.9	41.5
4	#5970.40	61.0 PK	68.2	-7.2	1.79 V	14	38.7	22.3
5	11650.00	63.6 PK	74.0	-10.4	2.95 V	143	38.6	25.0
6	11650.00	50.4 AV	54.0	-3.6	2.95 V	143	25.4	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5148.70	66.6 PK	74.0	-7.4	1.62 H	21	45.9	20.7
2	5148.70	53.5 AV	54.0	-0.5	1.62 H	21	32.8	20.7
3	*5190.00	118.2 PK			1.62 H	21	77.6	40.6
4	*5190.00	105.0 AV			1.62 H	21	64.4	40.6
5	#10380.00	62.4 PK	68.2	-5.8	2.62 H	100	38.6	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	3.68 V	326	38.9	20.7
2	5150.00	48.0 AV	54.0	-6.0	3.68 V	326	27.3	20.7
3	*5190.00	113.4 PK			3.68 V	326	72.8	40.6
4	*5190.00	99.4 AV			3.68 V	326	58.8	40.6
5	#10380.00	62.2 PK	68.2	-6.0	3.17 V	148	38.4	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.72 H	28	44.6	20.7
2	5150.00	53.2 AV	54.0	-0.8	1.72 H	28	32.5	20.7
3	*5230.00	121.6 PK			1.72 H	28	81.1	40.5
4	*5230.00	108.3 AV			1.72 H	28	67.8	40.5
5	5350.00	61.8 PK	74.0	-12.2	1.72 H	28	41.5	20.3
6	5350.00	48.7 AV	54.0	-5.3	1.72 H	28	28.4	20.3
7	#10460.00	63.2 PK	68.2	-5.0	2.59 H	104	39.0	24.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	3.86 V	325	39.7	20.7
2	5150.00	47.6 AV	54.0	-6.4	3.86 V	325	26.9	20.7
3	*5230.00	117.2 PK			3.86 V	325	76.7	40.5
4	*5230.00	103.9 AV			3.86 V	325	63.4	40.5
5	5350.00	59.6 PK	74.0	-14.4	3.86 V	325	39.3	20.3
6	5350.00	46.9 AV	54.0	-7.1	3.86 V	325	26.6	20.3
7	#10460.00	63.0 PK	68.2	-5.2	3.10 V	148	38.8	24.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.20	67.1 PK	68.2	-1.1	1.95 H	310	45.7	21.4
2	*5755.00	121.0 PK			1.95 H	310	79.7	41.3
3	*5755.00	107.3 AV			1.95 H	310	66.0	41.3
4	#5925.60	61.1 PK	68.2	-7.1	1.95 H	310	39.0	22.1
5	11510.00	64.7 PK	74.0	-9.3	2.59 H	114	38.9	25.8
6	11510.00	51.4 AV	54.0	-2.6	2.59 H	114	25.6	25.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	60.4 PK	68.2	-7.8	1.82 V	14	39.1	21.3
2	*5755.00	115.1 PK			1.82 V	14	73.8	41.3
3	*5755.00	102.2 AV			1.82 V	14	60.9	41.3
4	#5956.40	61.5 PK	68.2	-6.7	1.82 V	14	39.3	22.2
5	11510.00	64.5 PK	74.0	-9.5	3.08 V	147	38.7	25.8
6	11510.00	51.1 AV	54.0	-2.9	3.08 V	147	25.3	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.40	67.2 PK	68.2	-1.0	1.93 H	310	45.8	21.4
2	#5636.40	67.2 PK	68.2	-1.0	1.96 H	310	45.8	21.4
3	*5795.00	121.5 PK			1.96 H	310	80.1	41.4
4	*5795.00	108.6 AV			1.96 H	310	67.2	41.4
5	#5937.20	61.1 PK	68.2	-7.1	1.96 H	310	38.9	22.2
6	11590.00	64.7 PK	74.0	-9.3	2.67 H	115	39.0	25.7
7	11590.00	51.3 AV	54.0	-2.7	2.67 H	115	25.6	25.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.00	60.9 PK	68.2	-7.3	1.81 V	17	39.7	21.2
2	#5618.00	60.9 PK	68.2	-7.3	1.81 V	17	39.7	21.2
3	*5795.00	115.8 PK			1.81 V	17	74.4	41.4
4	*5795.00	102.9 AV			1.81 V	17	61.5	41.4
5	#5950.80	61.4 PK	68.2	-6.8	1.81 V	17	39.2	22.2
6	11590.00	64.4 PK	74.0	-9.6	2.97 V	150	38.7	25.7
7	11590.00	51.0 AV	54.0	-3.0	2.97 V	150	25.3	25.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Rex Wang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5142.40	65.1 PK	74.0	-8.9	1.49 H	25	44.4	20.7
2	5142.40	53.4 AV	54.0	-0.6	1.49 H	25	32.7	20.7
3	*5210.00	113.9 PK			1.49 H	25	73.4	40.5
4	*5210.00	101.0 AV			1.49 H	25	60.5	40.5
5	#10420.00	63.1 PK	68.2	-5.1	2.68 H	104	39.1	24.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	3.82 V	318	39.9	20.7
2	5150.00	48.4 AV	54.0	-5.6	3.82 V	318	27.7	20.7
3	*5210.00	109.2 PK			3.82 V	318	68.7	40.5
4	*5210.00	96.6 AV			3.82 V	318	56.1	40.5
5	#10420.00	62.7 PK	68.2	-5.5	3.08 V	145	38.7	24.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	20.9°C, 73.8% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.80	67.1 PK	68.2	-1.1	2.06 H	313	45.6	21.5
2	#5644.80	67.1 PK	68.2	-1.1	2.03 H	313	45.6	21.5
3	*5775.00	115.8 PK			2.06 H	313	74.4	41.4
4	*5775.00	103.5 AV			2.06 H	313	62.1	41.4
5	#5993.20	60.7 PK	68.2	-7.5	2.06 H	313	38.4	22.3
6	11550.00	64.5 PK	74.0	-9.5	2.58 H	117	38.9	25.6
7	11550.00	51.2 AV	54.0	-2.8	2.58 H	117	25.6	25.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.00	60.3 PK	68.2	-7.9	1.81 V	13	38.8	21.5
2	#5648.00	60.3 PK	68.2	-7.9	1.81 V	13	38.8	21.5
3	*5775.00	111.0 PK			1.81 V	13	69.6	41.4
4	*5775.00	97.8 AV			1.81 V	13	56.4	41.4
5	#5974.80	61.4 PK	68.2	-6.8	1.81 V	13	39.1	22.3
6	11550.00	64.2 PK	74.0	-9.8	3.07 V	147	38.6	25.6
7	11550.00	50.9 AV	54.0	-3.1	3.07 V	147	25.3	25.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11a Channel 36

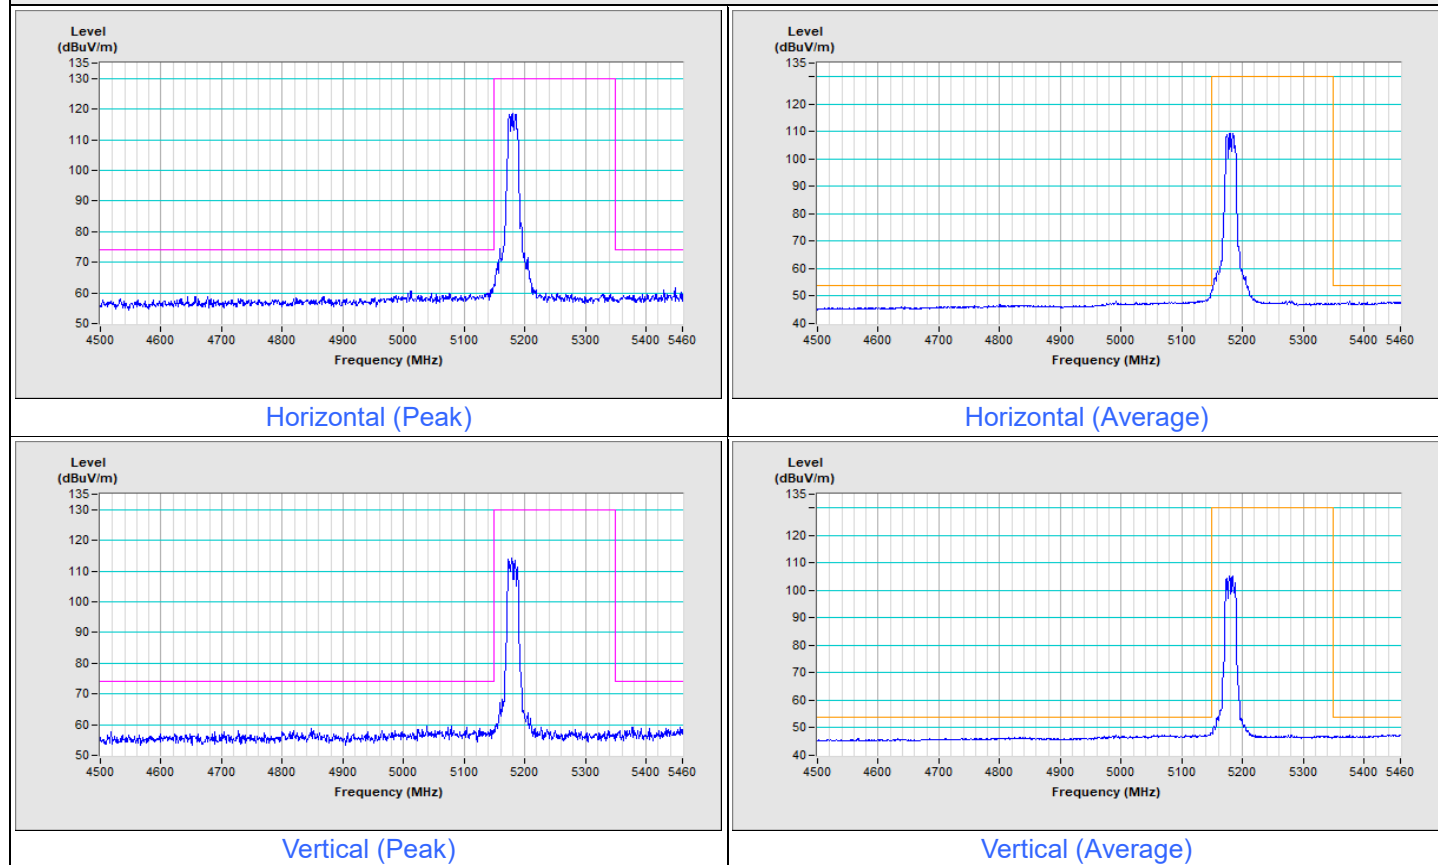


802.11a Channel 48

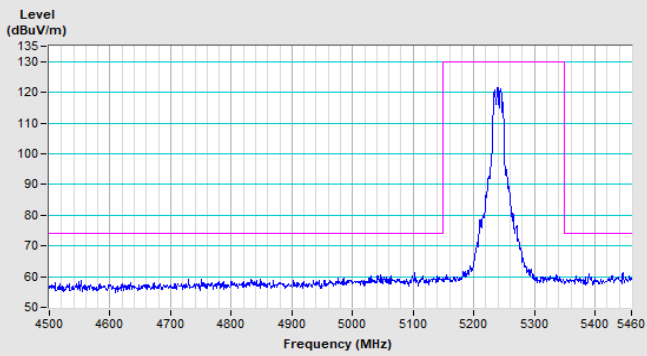


Horizontal (Peak)

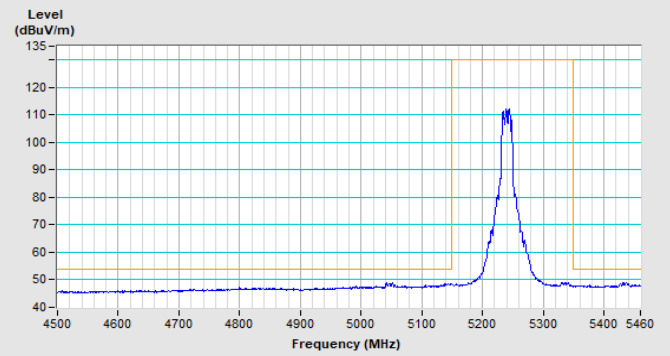

Horizontal (Average)

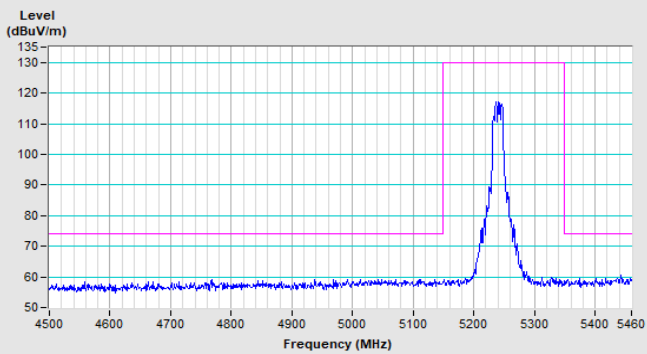


Vertical (Peak)

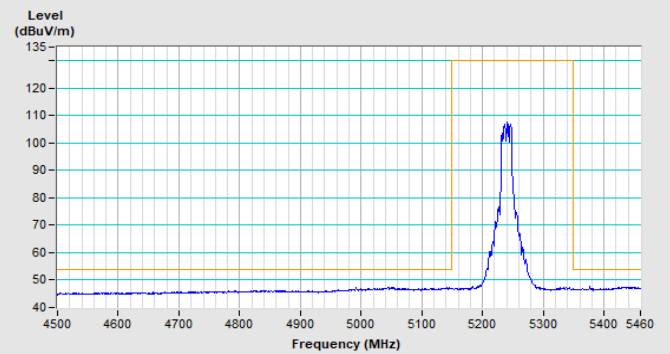


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 36

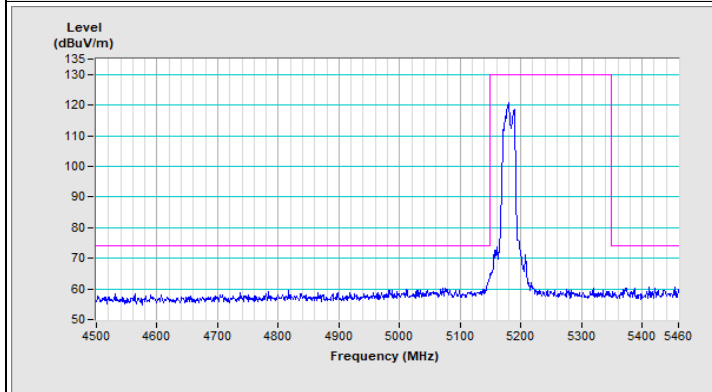


Horizontal (Peak)

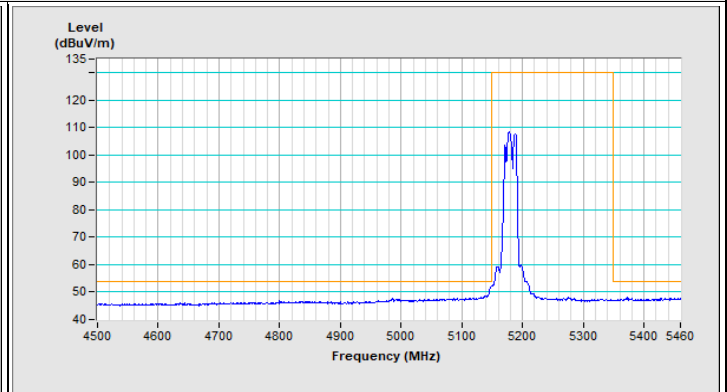

Horizontal (Average)

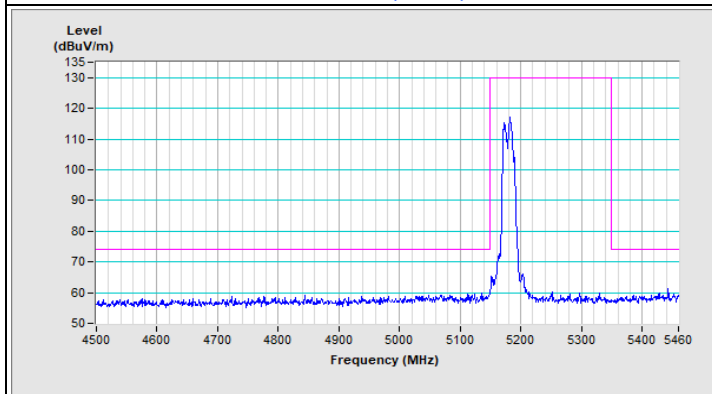


Vertical (Peak)

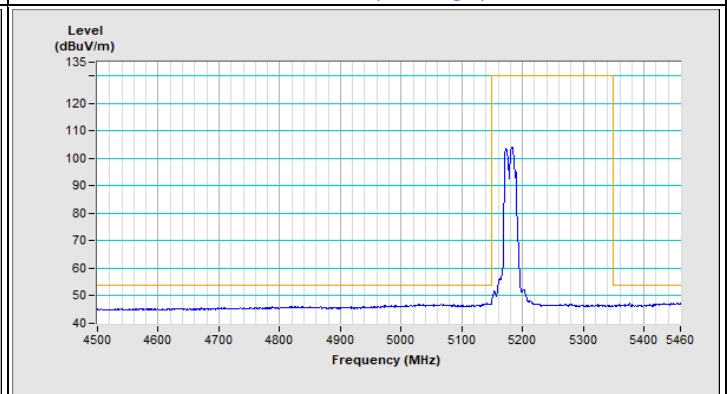


Vertical (Average)


802.11ax (HE20) Channel 48

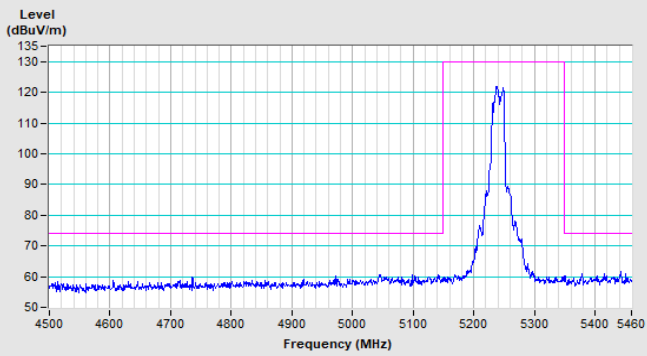


Horizontal (Peak)

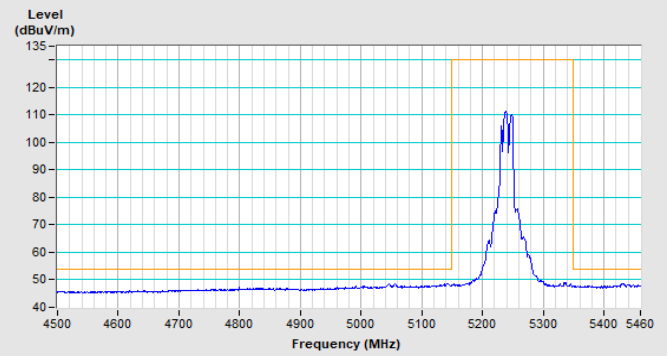

Horizontal (Average)

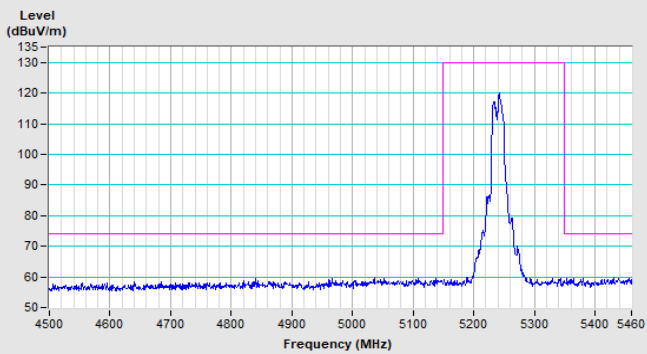


Vertical (Peak)

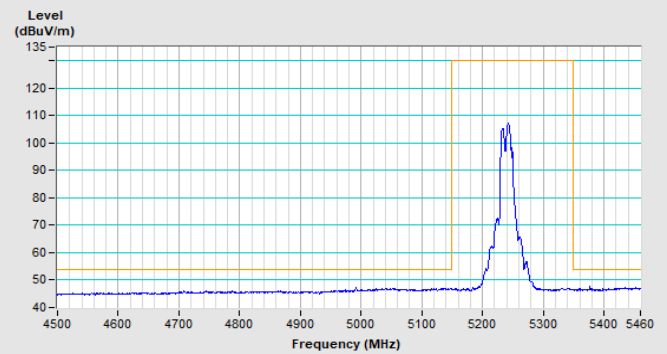


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE40) Channel 38

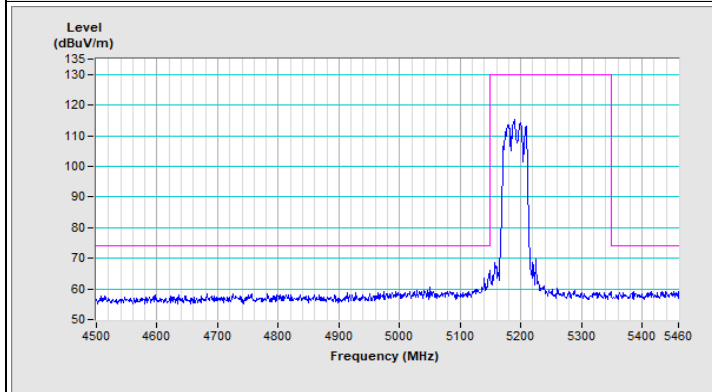


Horizontal (Peak)

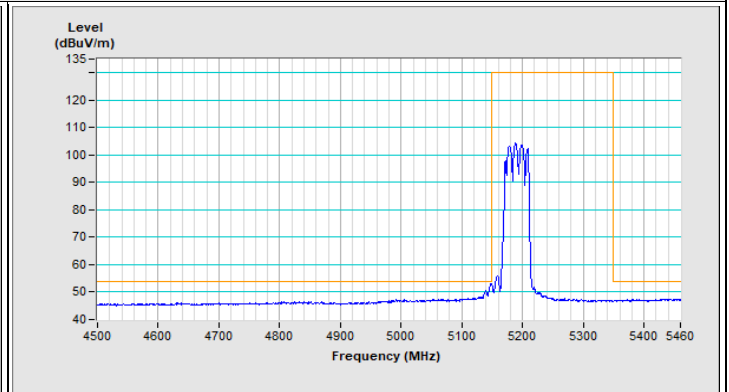

Horizontal (Average)

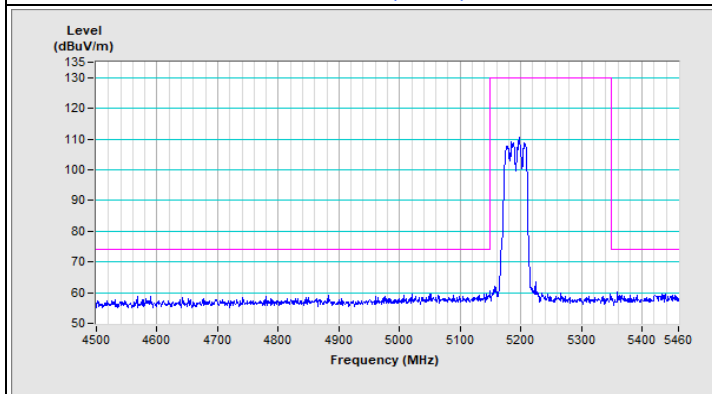


Vertical (Peak)

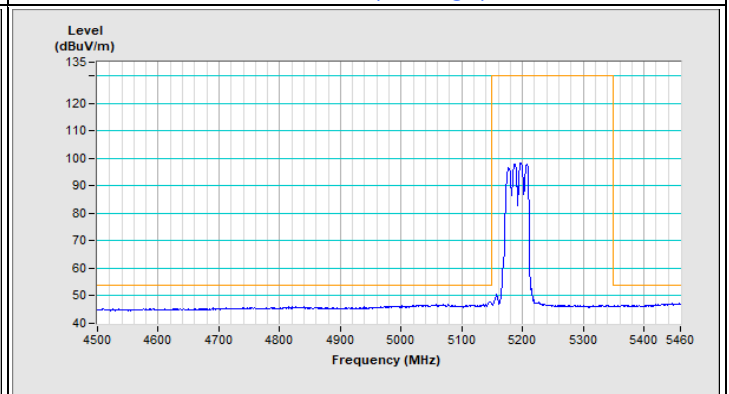


Vertical (Average)


802.11ax (HE40) Channel 46

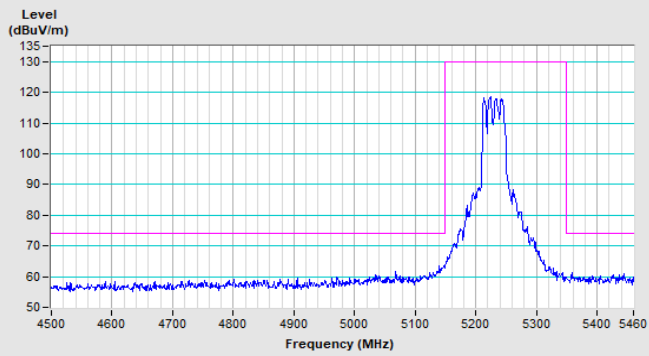


Horizontal (Peak)

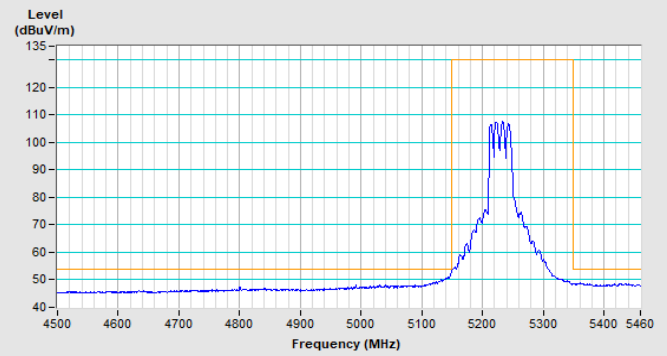

Horizontal (Average)

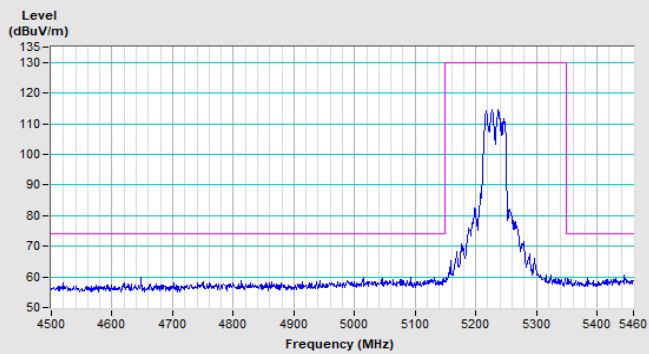


Vertical (Peak)

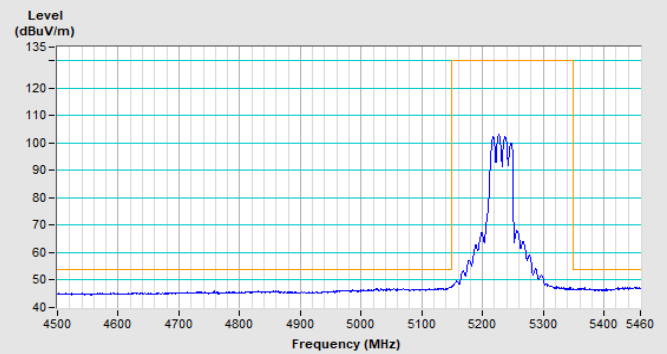


Vertical (Average)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE80) Channel 42

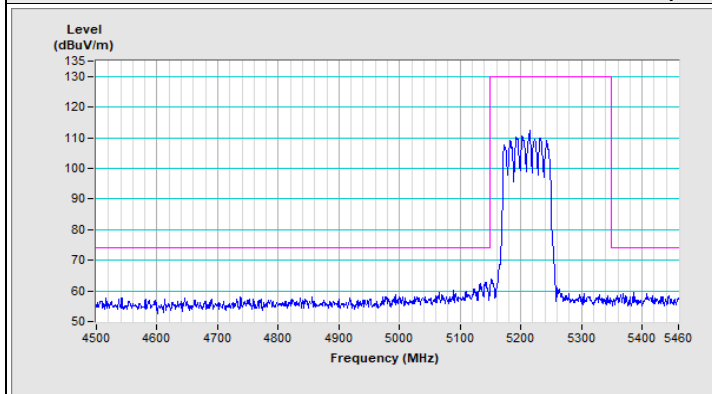


Horizontal (Peak)

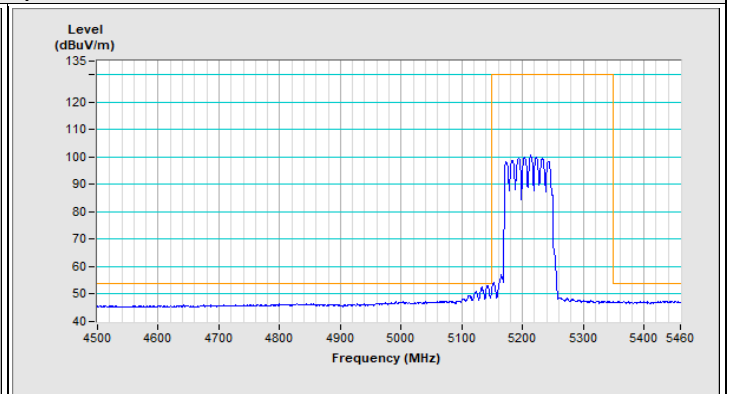

Horizontal (Average)

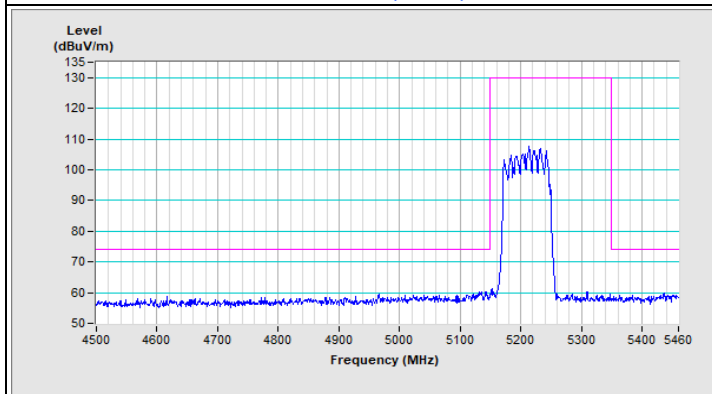


Vertical (Peak)

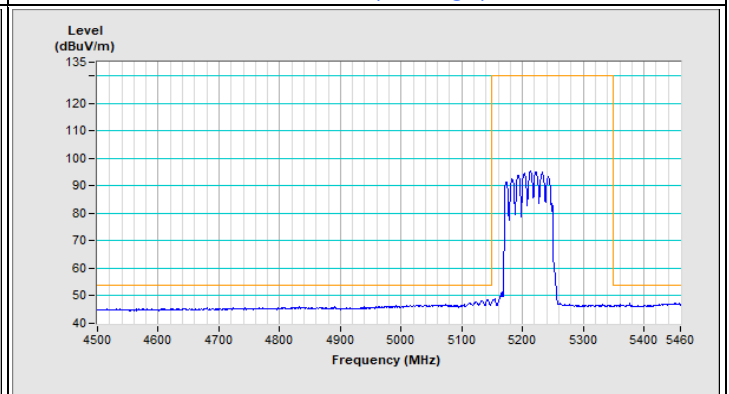


Vertical (Average)

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11a Channel 149

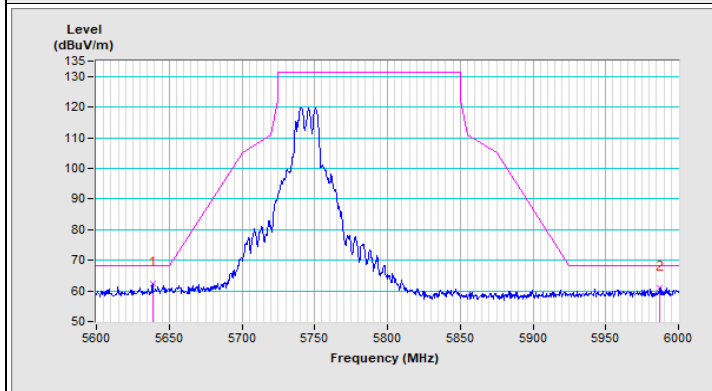


Horizontal (Peak)

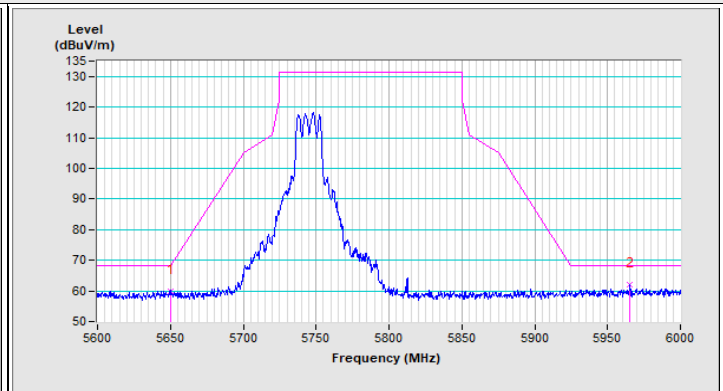


Vertical (Peak)

802.11a Channel 157

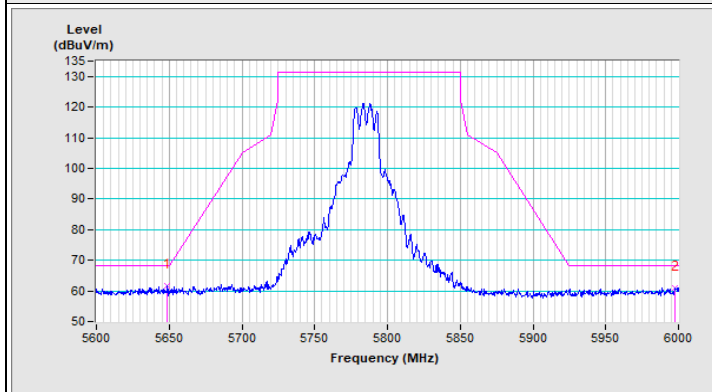


Horizontal (Peak)

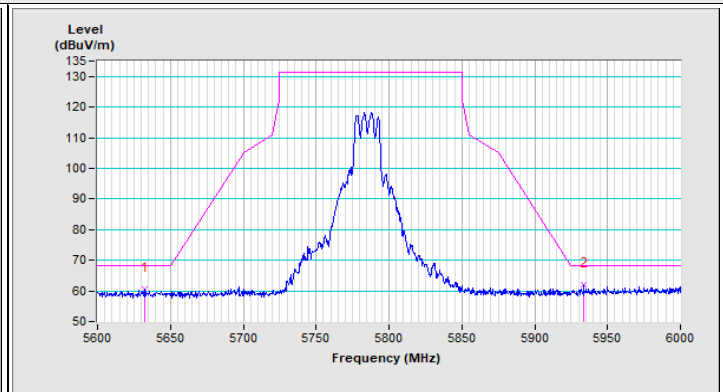


Vertical (Peak)

802.11a Channel 165

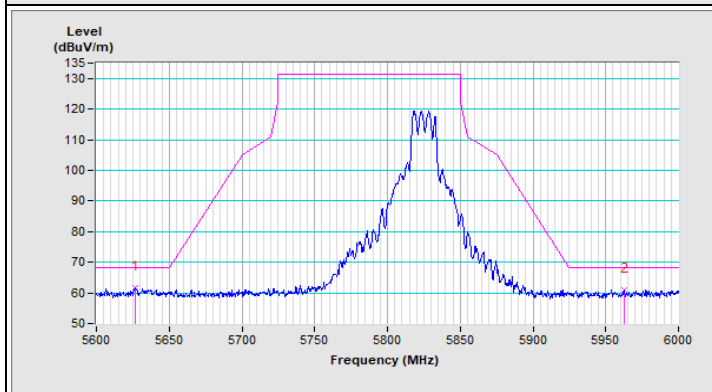



Horizontal (Peak)

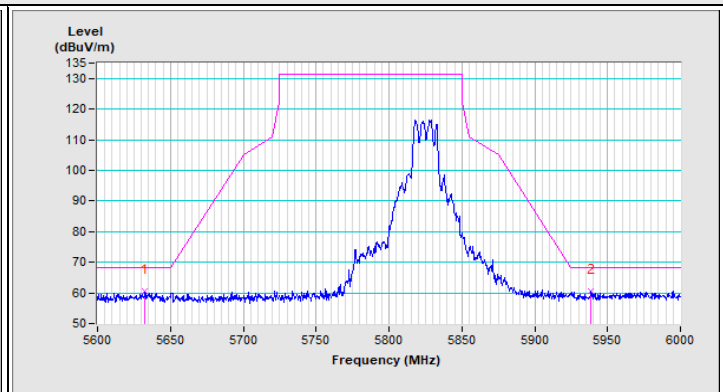



Vertical (Peak)

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------



802.11ax (HE20) Channel 149

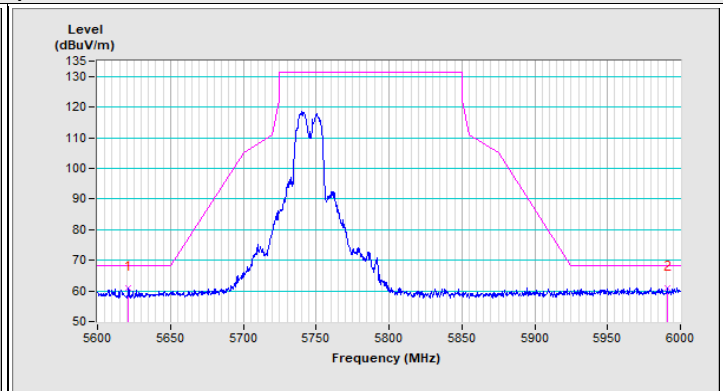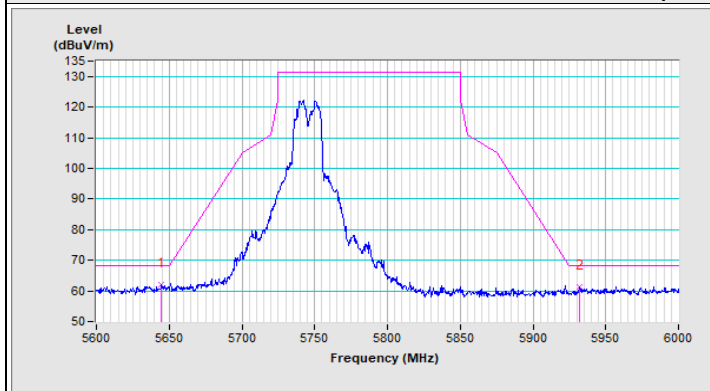

802.11ax (HE20) Channel 157

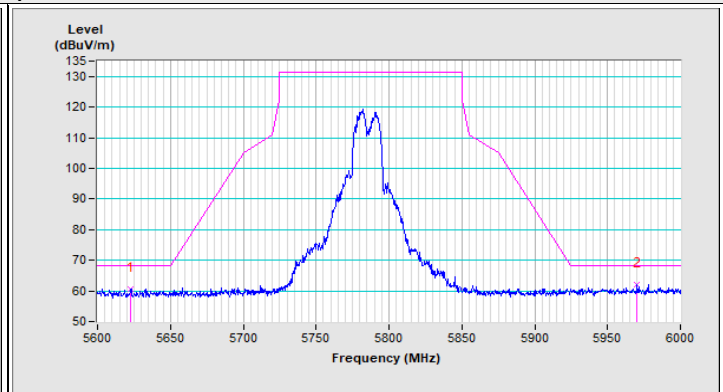
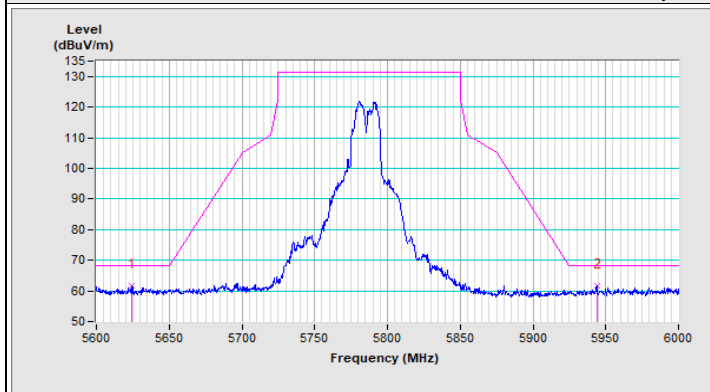


802.11ax (HE20) Channel 165

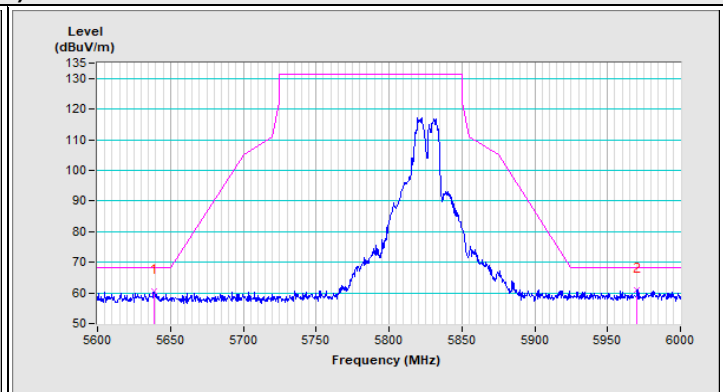
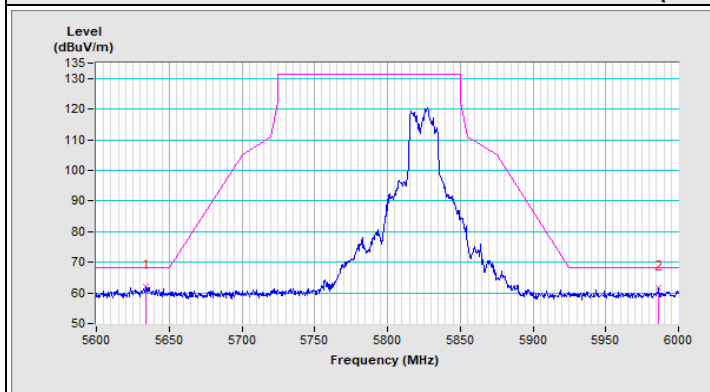


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ax (HE40) Channel 151

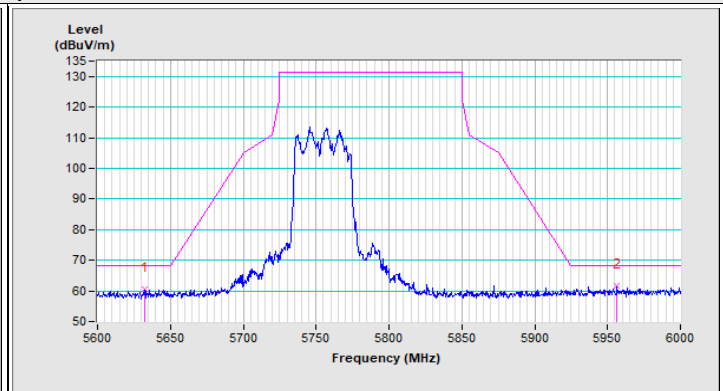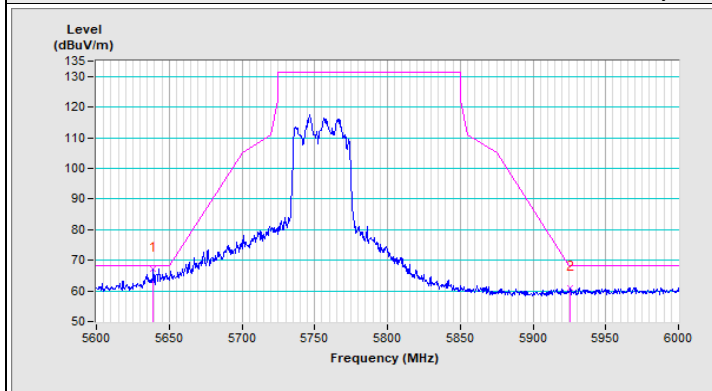


802.11ax (HE40) Channel 159

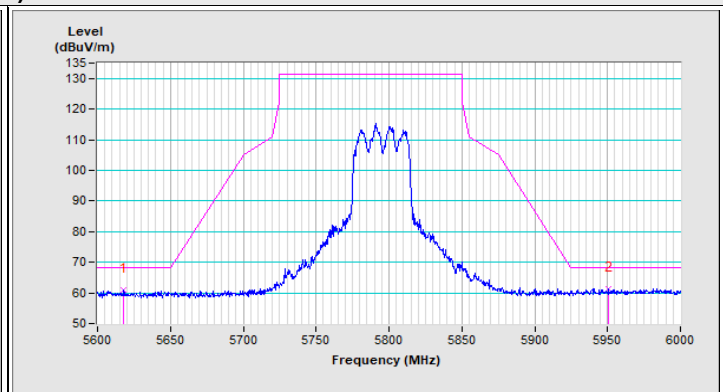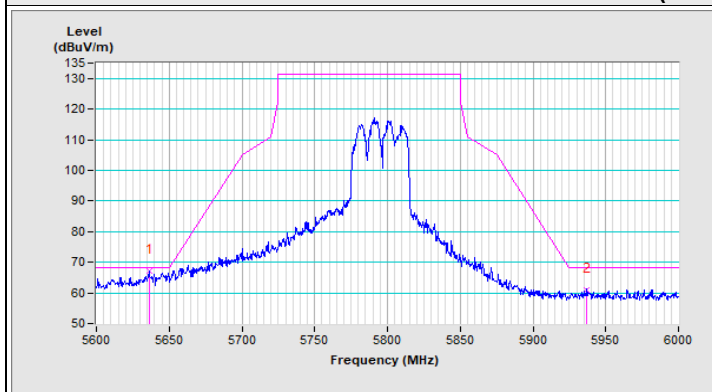


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ax (HE80) Channel 155

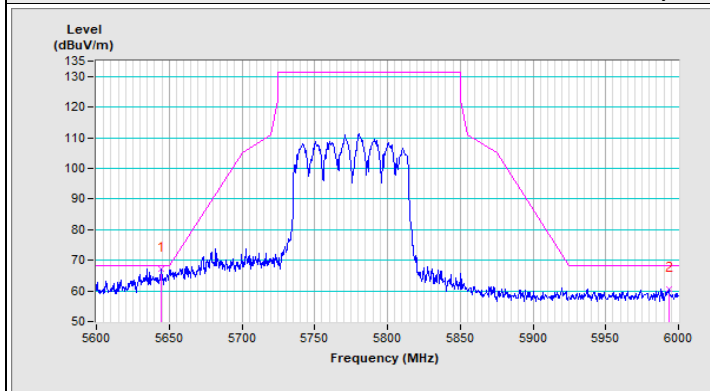

Horizontal (Peak)

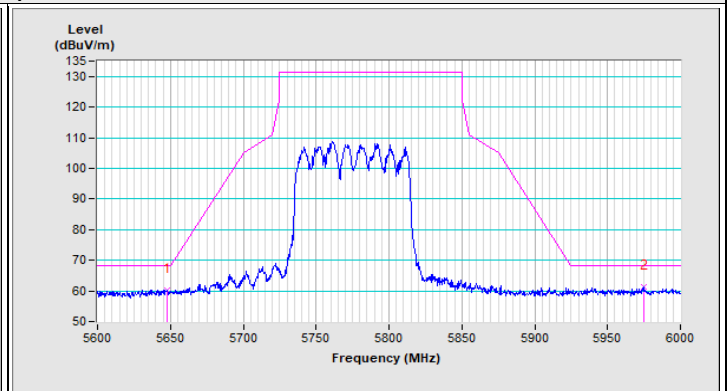

Vertical (Peak)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---