



REVISIONS			
REV	DESCRIPTION	DATE	APPROVE
F	NEW RELEASE	03/21/25	SANDY CHEN

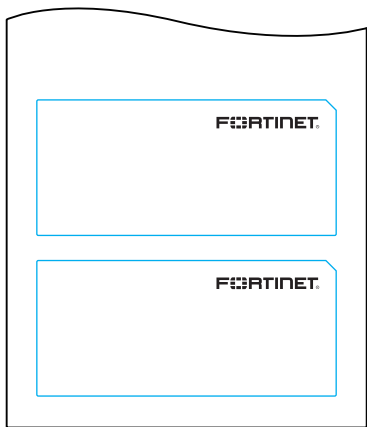

- NOTES:
- MATERIAL: SILVER MATT PET, t=0.05 ,高冠RHTLSM50BL#9
ADHESIVE: 壓克力背膠, t=0.024
 - FINISH: 上霧PET, t=0.025,金利寶TPATM(T)(30),線上列印
 - COLOR:
 - 底色為材質原色
 - TEXT=BLACK(K100)
 - 捲狀出貨,離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
 - TEMPERATURE RESISTANT= -20°C~125°C.
 - 被貼物:金屬
 - UL Approved, PGJ12,PRINTED,CM-100-SM
 - 未標註R角為自然R0.5
 - TEST REQUIREMENTS OR OTHER EQUIVALENT TEST METHOD

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附着力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

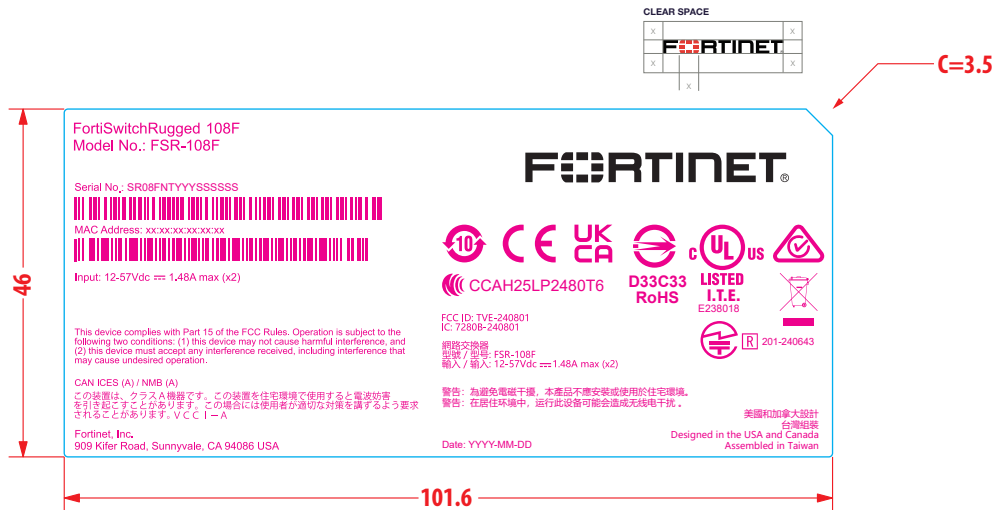

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 	WNC Wistron NeWeb Corp. 啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726		
			DWG TITLE		
			LABEL,DEVICE LBL,C3.5,101.6X46MM,SLIVER PET,FSR-108F,QSAM4-FT2-TF6		
			DRAWN	YOLANDA CHENG	03/21/25
ENGR	YOLANDA CHENG	03/21/25	A4	4L.QSAM4.002	F
APVD	SANDY CHEN	03/21/25	SCALE 1/1		SHEET 1 OF 1