

FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

PC64 Industrial 4G Router

MODEL NUMBER:

**PC64, PC64-W6-MT-C6, PC64-W6-MT-C4-AI, PC64-W6-MT-C4, PC64-W6H-MT-C4,
PC64-W6H-MT-C6, PC64-W6-MT-C16, PC64-W6H-MT-C16**

REPORT NUMBER: 4792273349-1-RF-1

FCC ID: TVV-PC64

ISSUE DATE: Aug 5, 2026

Prepared for

Pronto Networks, Inc

785 Ygnacio Valley Road Walnut Creek, CA 94596 United States

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	Aug 5, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass (NOTE 1)
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1 ANSI C63.10-2020, Clause 6.9.3	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.5 & 11.10.3	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass

Note:

1.For FCC, this report is also performed according to ANSI C63.10-2020 + Cor. 1-2023 +C63.10a-2024 + Errata to C63.10a-2024.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>13</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	14
7. ANTENNA PORT TEST RESULTS	17
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>17</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i>	<i>22</i>
7.5. <i>DUTY CYCLE</i>	<i>24</i>
8. RADIATED TEST RESULTS	25
8.1. <i>RESTRICTED BANDEDGE</i>	<i>32</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>45</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>51</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>69</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>72</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>74</i>
8.7. <i>SIMULTANEOUS TRANSMISSION OF HALOW & WIFI & LTE</i>	<i>76</i>
9. ANTENNA REQUIREMENT	82
10. AC POWER LINE CONDUCTED EMISSION	83

11.	TEST DATA.....	86
11.1.	APPENDIX A: DTS BANDWIDTH.....	86
11.1.1.	Test Result.....	86
11.1.2.	Test Graphs.....	87
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	93
11.2.1.	Test Result.....	93
11.2.2.	Test Graphs.....	94
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	100
11.3.1.	Test Result.....	100
11.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	101
11.4.1.	Test Result.....	101
11.4.2.	Test Graphs.....	102
11.5.	APPENDIX E: BAND EDGE MEASUREMENTS.....	114
11.5.1.	Test Result.....	114
11.5.2.	Test Graphs.....	115
11.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION.....	119
11.6.1.	Test Result.....	119
11.6.2.	Test Graphs.....	120
11.7.	APPENDIX G: DUTY CYCLE.....	138
11.7.1.	Test Result.....	138
11.7.2.	Test Graphs.....	139

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Pronto Networks, Inc
Address: 785 Ygnacio Valley Road Walnut Creek, CA 94596 United States

Manufacturer Information


Company Name: Pronto Networks, Inc
Address: 785 Ygnacio Valley Road Walnut Creek, CA 94596 United States

EUT Information

EUT Name: PC64 Industrial 4G Router
Model: PC64-W6H-MT-C4
Series Model: PC64, PC64-W6-MT-C6, PC64-W6-MT-C4-AI, PC64-W6-MT-C4, PC64-W6H-MT-C6, PC64-W6-MT-C16, PC64-W6H-MT-C16
Sample Received Date: June 4, 2026
Sample ID: 9819725
Date of Tested: June 4, 2026 to Aug 5, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART C	Pass

Prepared By:



Mick Zhang
Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART C, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, FCC 47 CFR Part 2, ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	4.36 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.47 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.65 dB (1 GHz ~ 18 GHz)
	4.73 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	PC64 Industrial 4G Router
Model	PC64-W6H-MT-C4
Series Model	PC64, PC64-W6-MT-C6, PC64-W6-MT-C4-AI, PC64-W6-MT-C4, PC64-W6H-MT-C6, PC64-W6-MT-C16, PC64-W6H-MT-C16
Model difference	PC64, PC64-W6-MT-C6, PC64-W6-MT-C4-AI, PC64-W6-MT-C4, PC64-W6-MT-C16 without the HaLow function PC64-W6H-MT-C4, PC64-W6H-MT-C6, PC64-W6H-MT-C16 with the HaLow function. All models share the same basic platform, enclosure design, power circuitry, cellular circuitry and overall hardware architecture. Except for the circuitry and components associated with the HaLow function, all other hardware construction and operating principles are substantially identical.

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA(1024QAM, 256QAM, 6-QAM, 16QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/n HT40/ax HE20/ax HE40
Normal Test Voltage:	DC 48V

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	18.03
g	2412 ~ 2462	1-11[11]	16.57
n HT20	2412 ~ 2462	1-11[11]	19.73
n HT40	2422 ~ 2452	3-9[7]	16.64
ax HE20	2412 ~ 2462	1-11[11]	14.61
ax HE40	2422 ~ 2452	3-9[7]	14.75

Note: Maximum conducted output power = measured value + cable loss (provided by UL) + cable loss (provided by UL or client)

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
ax HE40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		QATool_Dbg					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	15	15	14.5	/		
	2	15	15	14.5			
802.11g	1	16	15	14.5			
	2	16	15	14.5			
802.11n HT20	1	17.5	17.5	16.5			
	2	17.5	17.5	16.5			
802.11n HT40	1	/			14.5	14.5	14
	2	/			14.5	14.5	14
802.11ax HE20	1	14.5	15	16	/		
	2	14.5	15	16			
802.11ax HE40	1	/			15	16	16
	2	/			15	16	16

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0

802.11b/g only support SISO mode.
802.11n HT20/HT40/ax HE20/HE40 support SISO and MIMO mode.

802.11b/g SISO mode, Antenna 1 and Antenna 2 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11n/ax SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	External antenna	3.34
2	2412-2462	External antenna	3.34

Note: The antenna gain is provided by client / obtained through lab tests.

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 3.34\text{dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 6.35 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note:

1. HALOW&WWAN&WLAN can transmit simultaneously. (declared by client)

2. All the simultaneous transmission modes have been tested, only the worst data for HALOW&WLAN 2.4G<E B41 was recorded in the 2.4G WiFi report.

5.7. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	L14	/
2	AC/DC Adapter	GRT90-480200	N/A	100-240 V~/ 2.0 A Max~50/60 Hz Output: 48.0V  2.0A 96.0W

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	Ethernet cable	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

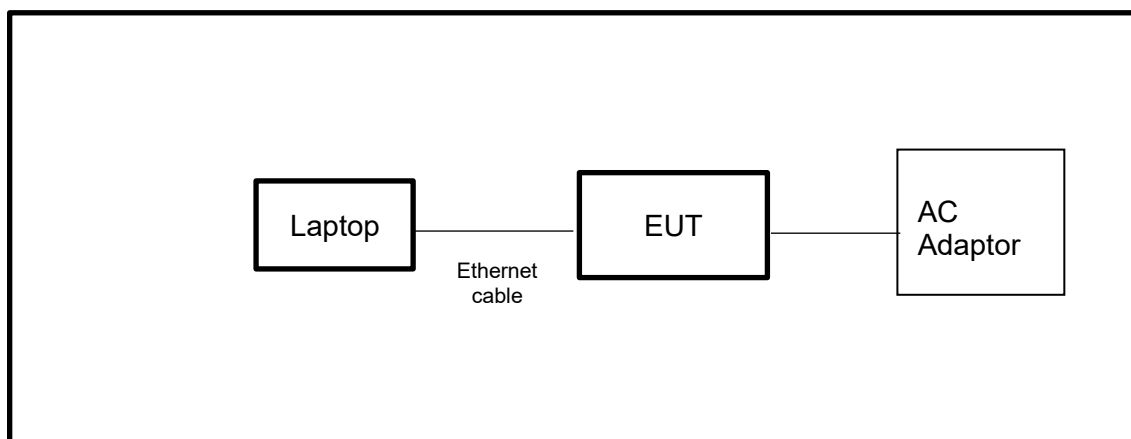

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date	
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026	
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026	
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026	
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026	
Software						
Description		Manufacturer		Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz		EMC 32	10.60.10	
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date	
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026	
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026	
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026	
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026	
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026	
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026	
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026	
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026	
Software						
Description		Manufacturer		Name		Version
Tonsend SRD Test System		Tonsend		JS1120-3 RF Test System		V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.12, 2025	Sep.11, 2026
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.12, 2025	Sep.11, 2026
Horn Antenna	ETS-Lindgren	3117	00213191	Jan.29,2026	Jan.28,2029
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.12, 2025	Sep.11, 2026

Band Reject Filter	Wainwright	WRCJV8- 2350-2400- 2483.5- 2533.5-40SS	4	Sep.12, 2025	Sep.11, 2026
Software					
Description	Manufacturer	Name		Version	
Test Software for Radiated Emission	Tonscend	JS32-RE		5.0.0	
Test Software for Radiated Emissions	Farad	EZ-EMC		Ver. UL-3A1	

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.9°C	Relative Humidity	63.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V

TEST DATE / ENGINEER

Test Date	July 14, 2026	Test By	Eason He
-----------	---------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
/	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

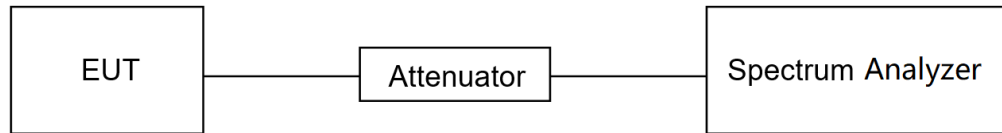TEST SETUP**TEST ENVIRONMENT**

Temperature	24.9℃	Relative Humidity	63.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V

TEST DATE / ENGINEER

Test Date	July 14, 2026	Test By	Eason He
-----------	---------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

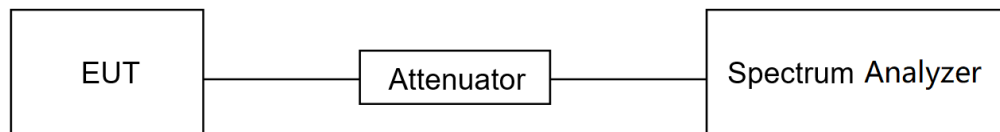

TEST ENVIRONMENT

Temperature	24.9°C	Relative Humidity	63.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V

TEST DATE / ENGINEER

Test Date	July 14, 2026	Test By	Eason He
-----------	---------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC 47 CFR §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

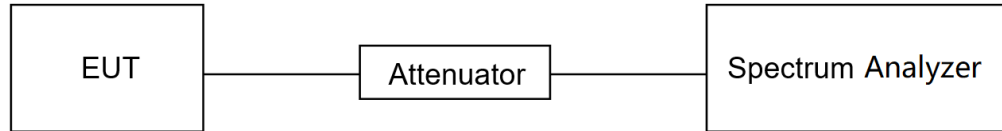TEST SETUP**TEST ENVIRONMENT**

Temperature	24.9℃	Relative Humidity	63.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V

TEST DATE / ENGINEER

Test Date	July 14, 2026	Test By	Eason He
-----------	---------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.9°C	Relative Humidity	63.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V

TEST DATE / ENGINEER

Test Date	July 14, 2026	Test By	Eason He
-----------	---------------	---------	----------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC 47 CFR §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC 47 CFR §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

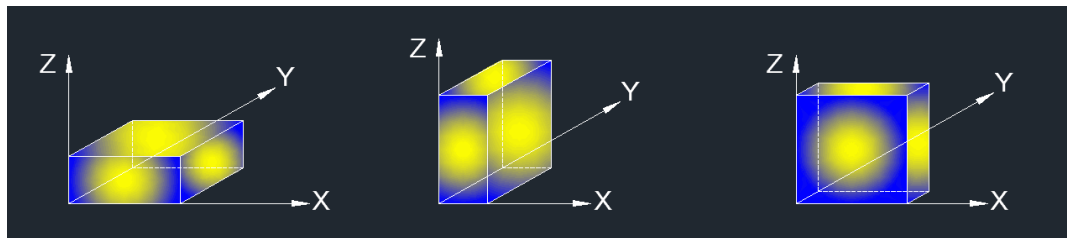

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

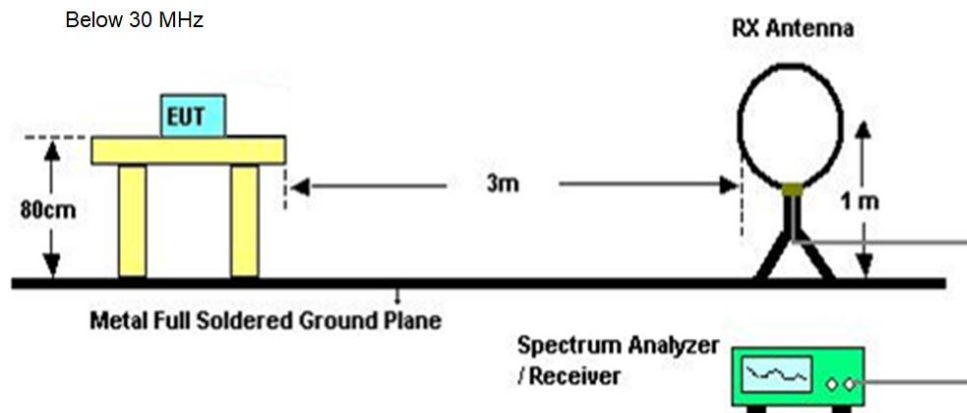

Below 1 GHz and above 30 MHz

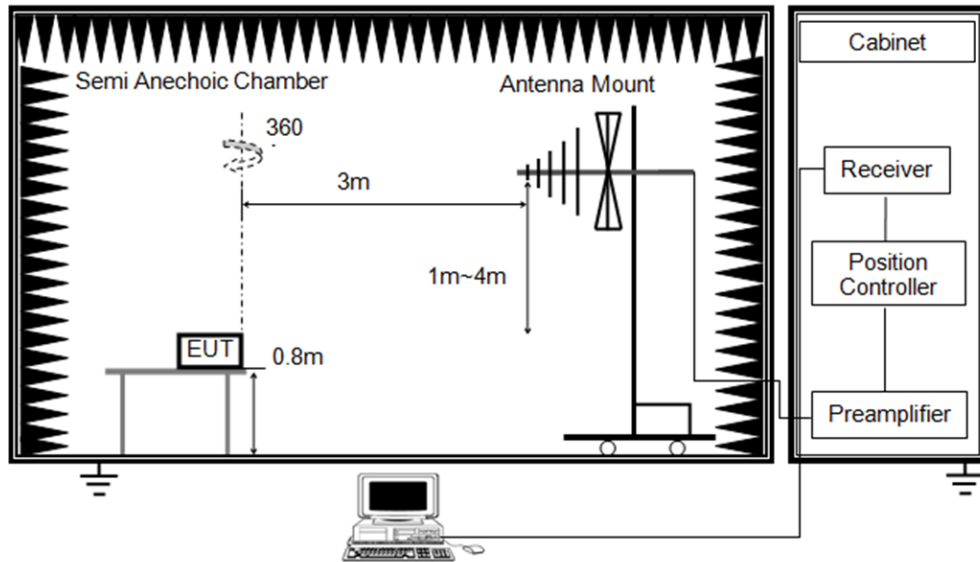

Above 1GHz

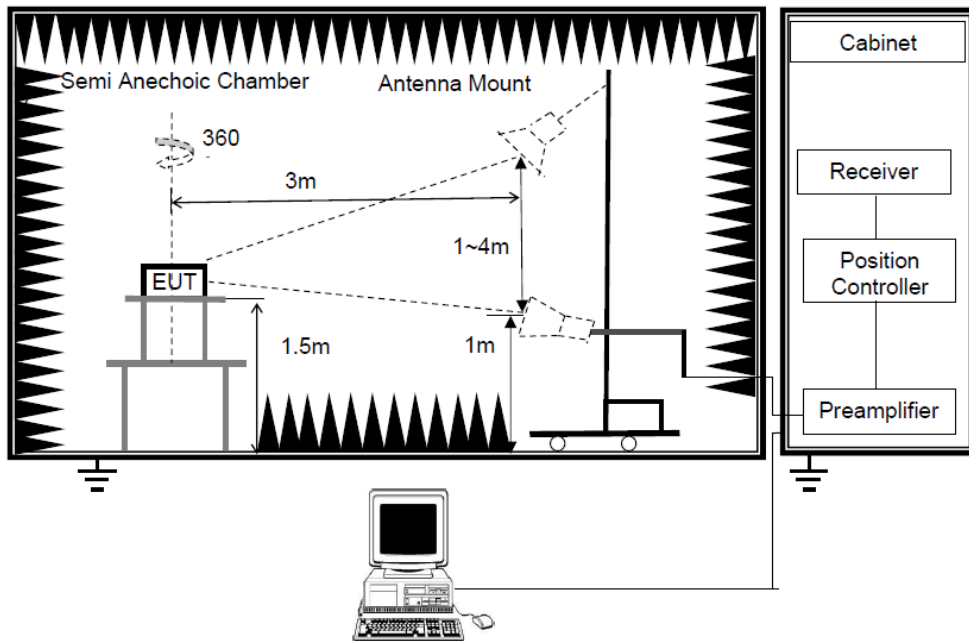

TEST ENVIRONMENT

Temperature	23.6°C	Relative Humidity	55%
Atmosphere Pressure	101kPa	Test Voltage	DC 48V


TEST DATE / ENGINEER

Test Date	July 20, 2026	Test By	Burt Hu
-----------	---------------	---------	---------

TEST RESULTS

8.1. RESTRICTED BANDEDGE

TX Radiated Test Result

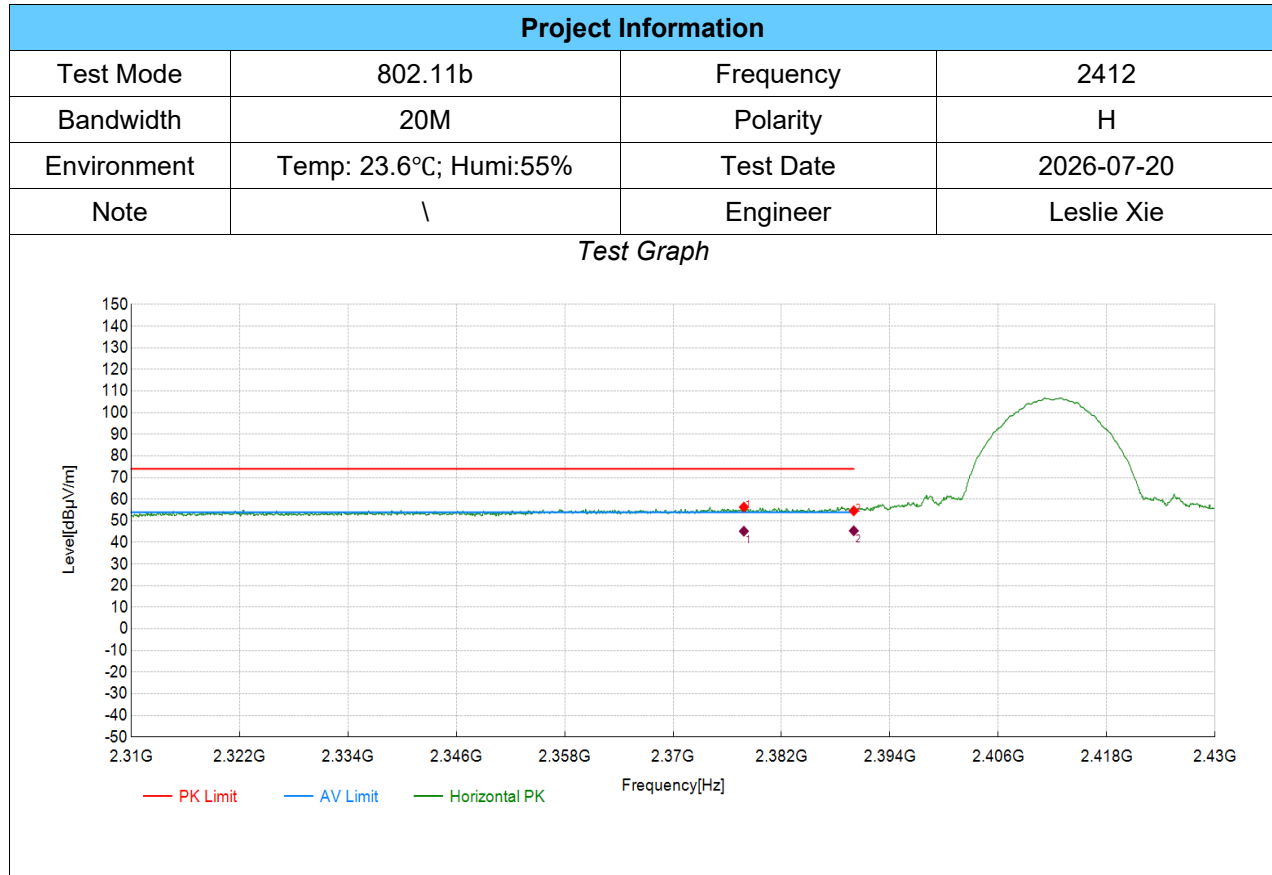

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2377.83	47.82	56.35	8.53	74.00	17.65	PK	Horizontal	PASS
2	2390.00	45.92	54.62	8.70	74.00	19.38	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2377.83	8.53	36.67	45.20	54.00	8.80	Horizontal	PASS
2	2390.00	8.69	36.69	45.38	54.00	8.62	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

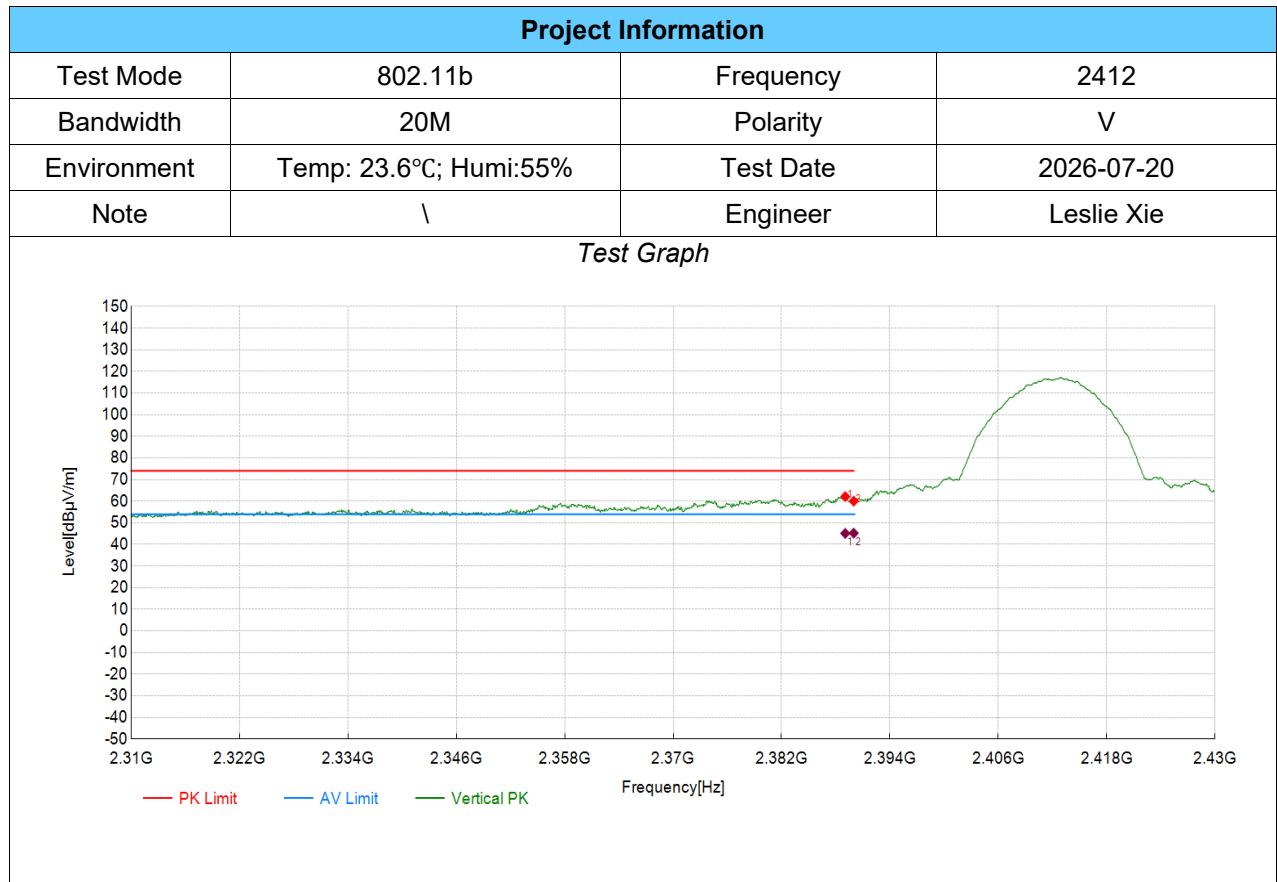

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.06	53.46	62.14	8.68	74.00	11.86	PK	Vertical	PASS
2	2390.00	51.32	60.02	8.70	74.00	13.98	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.06	8.68	36.43	45.11	54.00	8.89	Vertical	PASS
2	2390.00	8.69	36.53	45.22	54.00	8.78	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

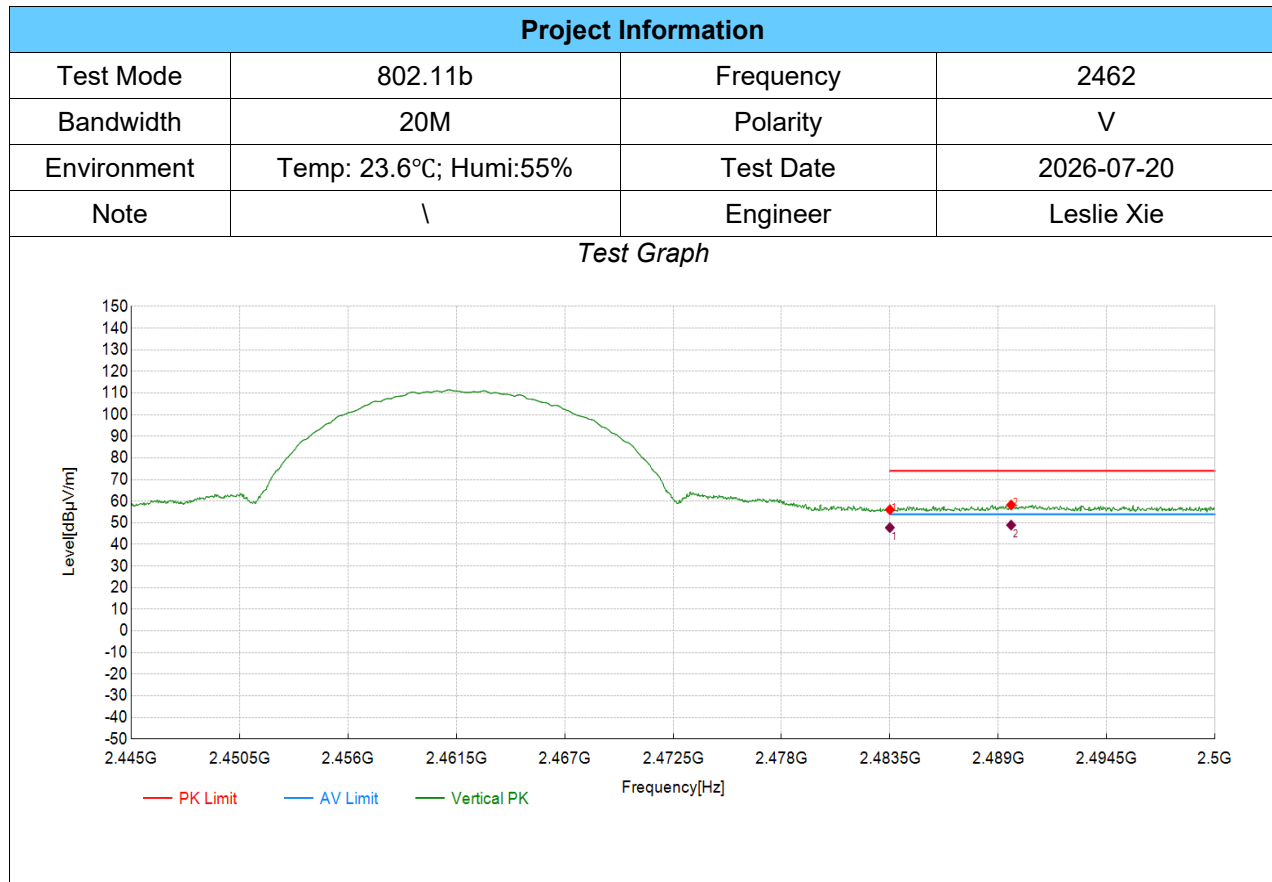

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	46.09	56.08	9.99	74.00	17.92	PK	Vertical	PASS
2	2489.65	48.19	58.26	10.07	74.00	15.74	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	37.77	47.76	54.00	6.24	Vertical	PASS
2	2489.65	10.07	38.87	48.94	54.00	5.06	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

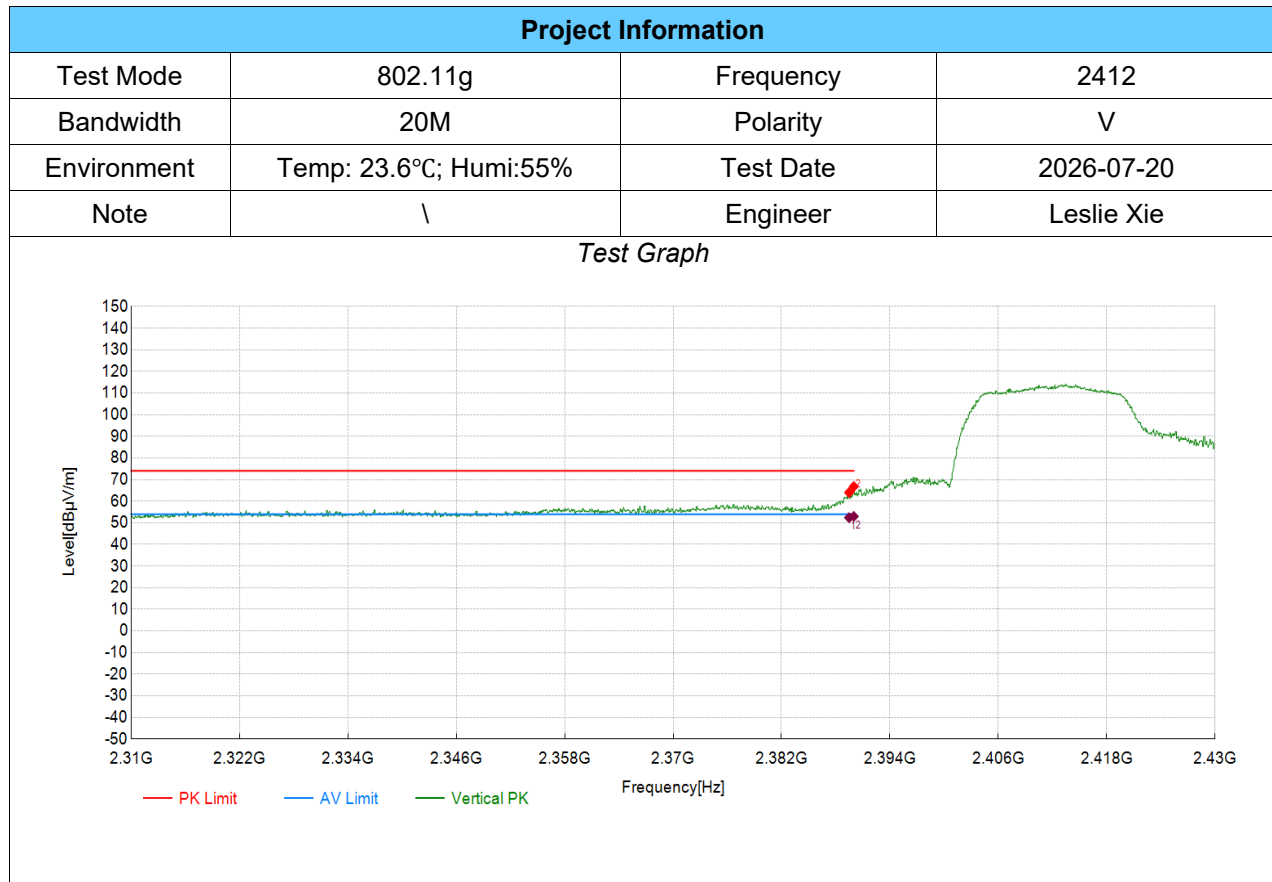


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.48	55.30	63.99	8.69	74.00	10.01	PK	Vertical	PASS
2	2390.00	58.11	66.81	8.70	74.00	7.19	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.48	8.69	43.70	52.39	54.00	1.61	Vertical	PASS
2	2390.00	8.69	44.25	52.94	54.00	1.06	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

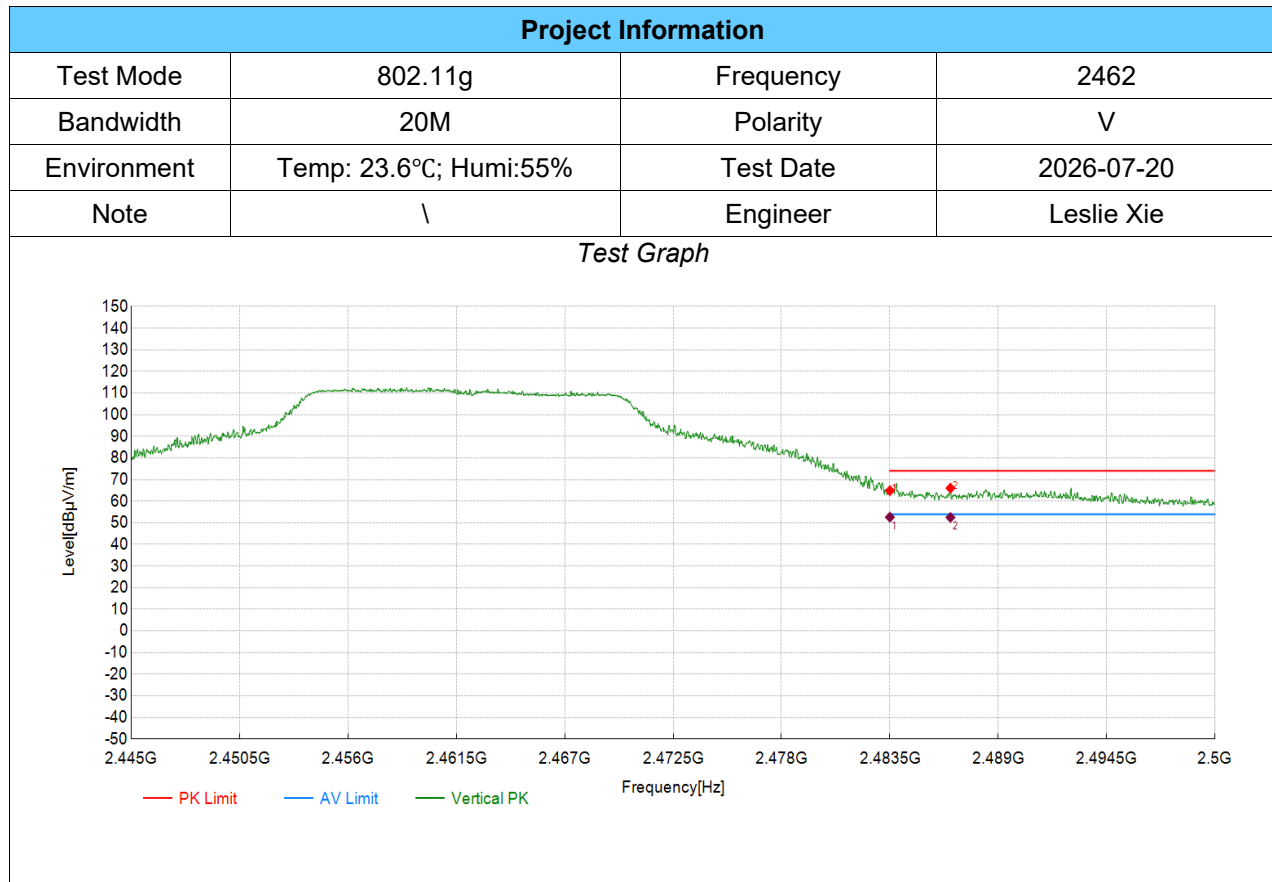

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	54.90	64.89	9.99	74.00	9.11	PK	Vertical	PASS
2	2486.57	56.00	66.03	10.03	74.00	7.97	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	42.63	52.62	54.00	1.38	Vertical	PASS
2	2486.57	10.03	42.46	52.49	54.00	1.51	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

TX Radiated Test Result

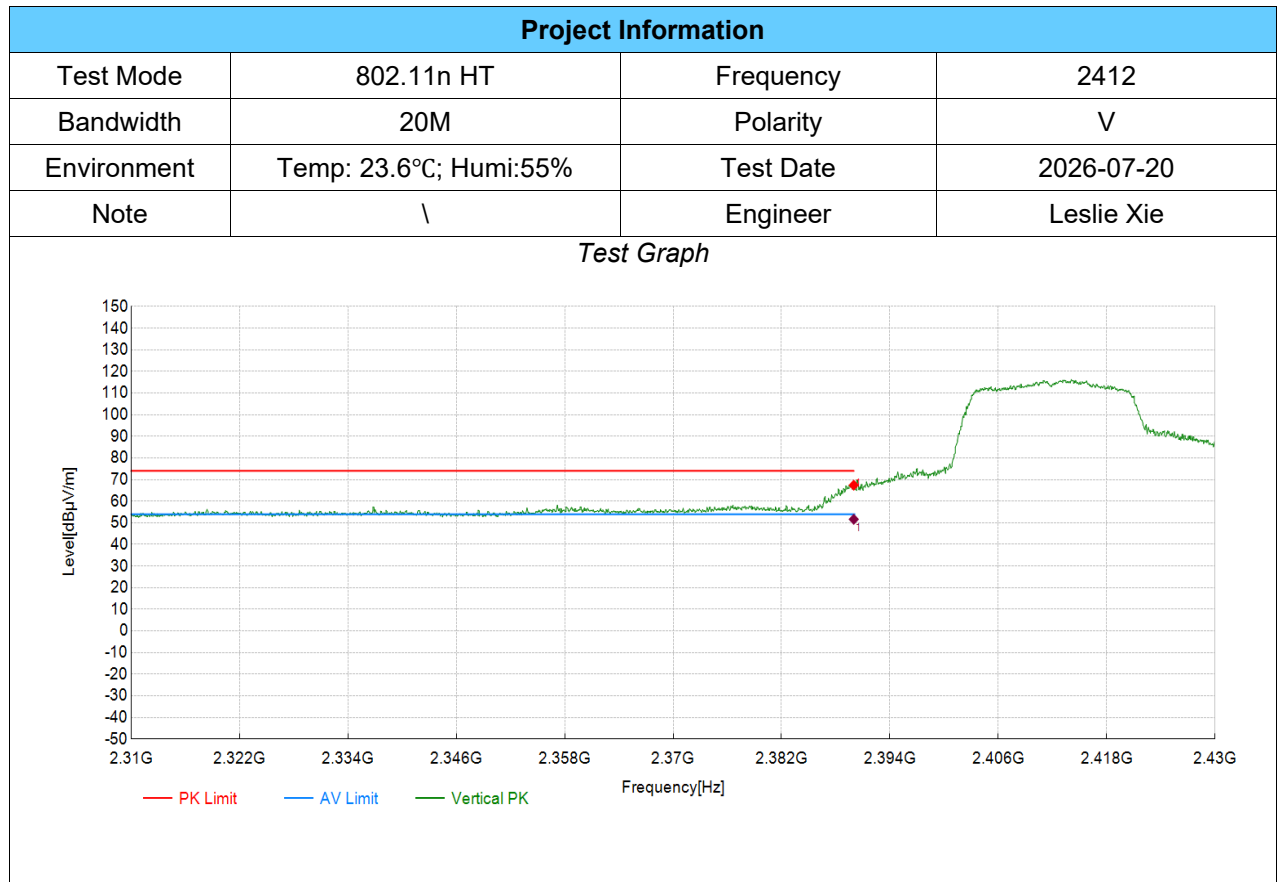

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2390.00	58.71	67.41	8.70	74.00	6.59	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2390.00	8.69	42.93	51.62	54.00	2.38	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

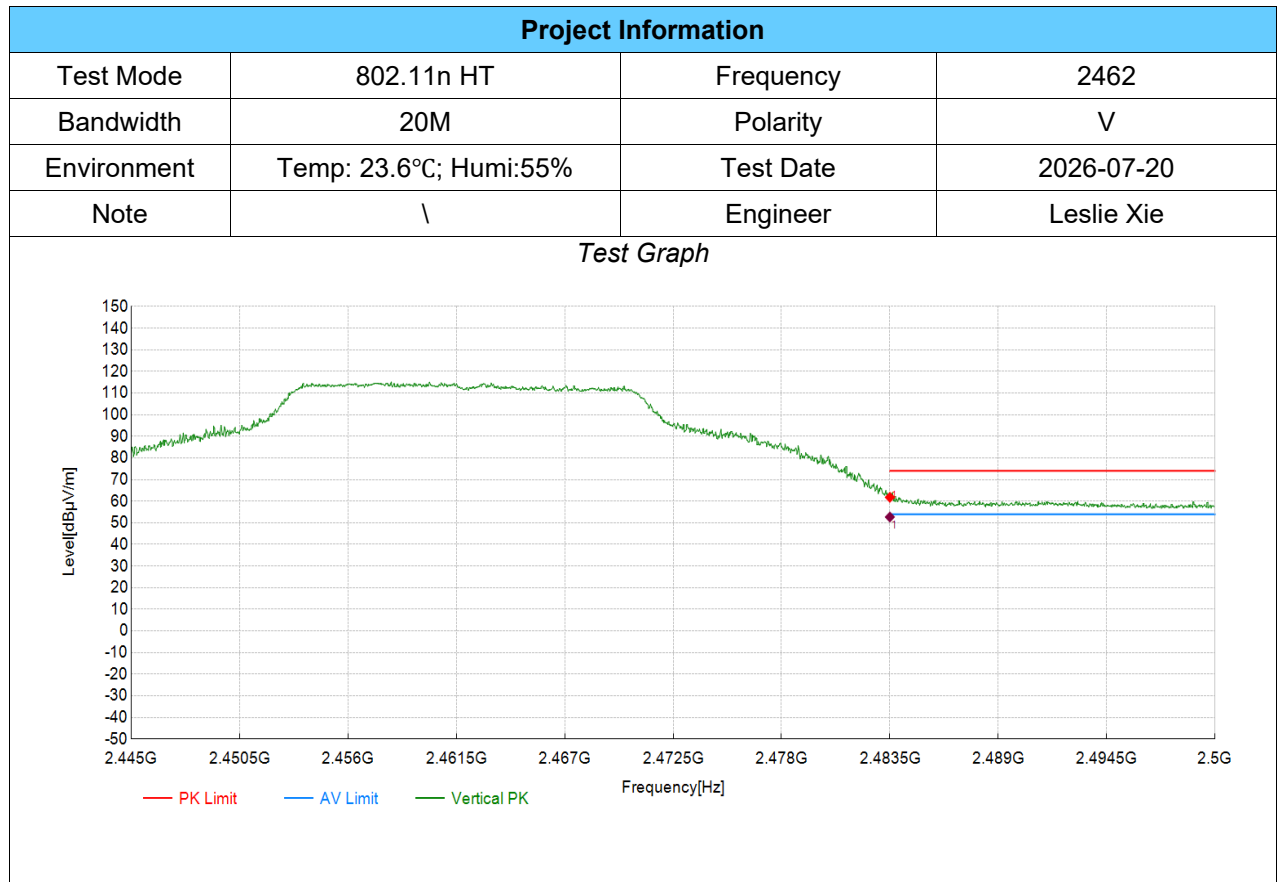


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	51.83	61.82	9.99	74.00	12.18	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	42.70	52.69	54.00	1.31	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

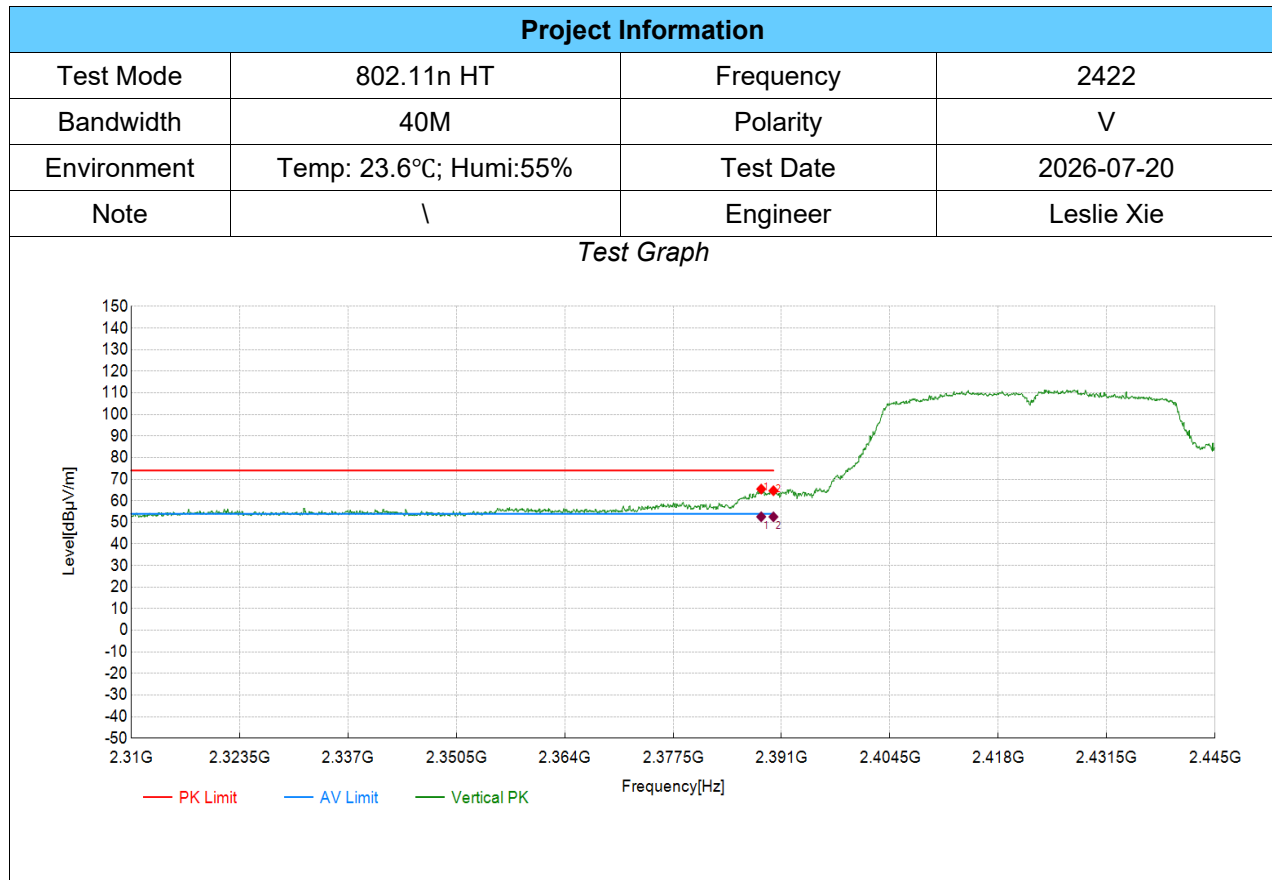


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2388.47	56.74	65.42	8.68	74.00	8.58	PK	Vertical	PASS
2	2390.00	55.96	64.66	8.70	74.00	9.34	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2388.47	8.68	43.93	52.61	54.00	1.39	Vertical	PASS
2	2390.00	8.69	43.89	52.58	54.00	1.42	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

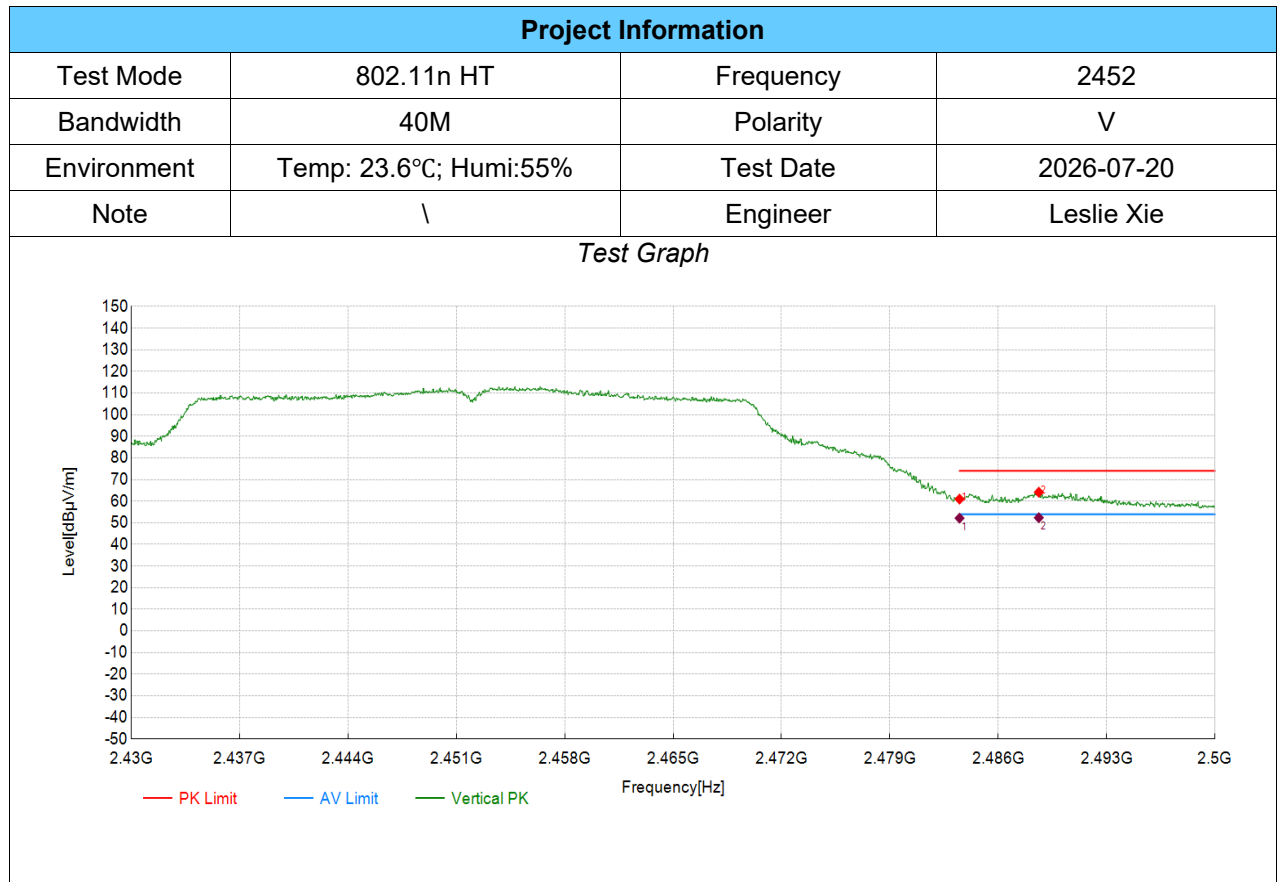


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	50.98	60.97	9.99	74.00	13.03	PK	Vertical	PASS
2	2488.62	54.10	64.16	10.06	74.00	9.84	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	42.18	52.17	54.00	1.83	Vertical	PASS
2	2488.62	10.06	42.30	52.36	54.00	1.64	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

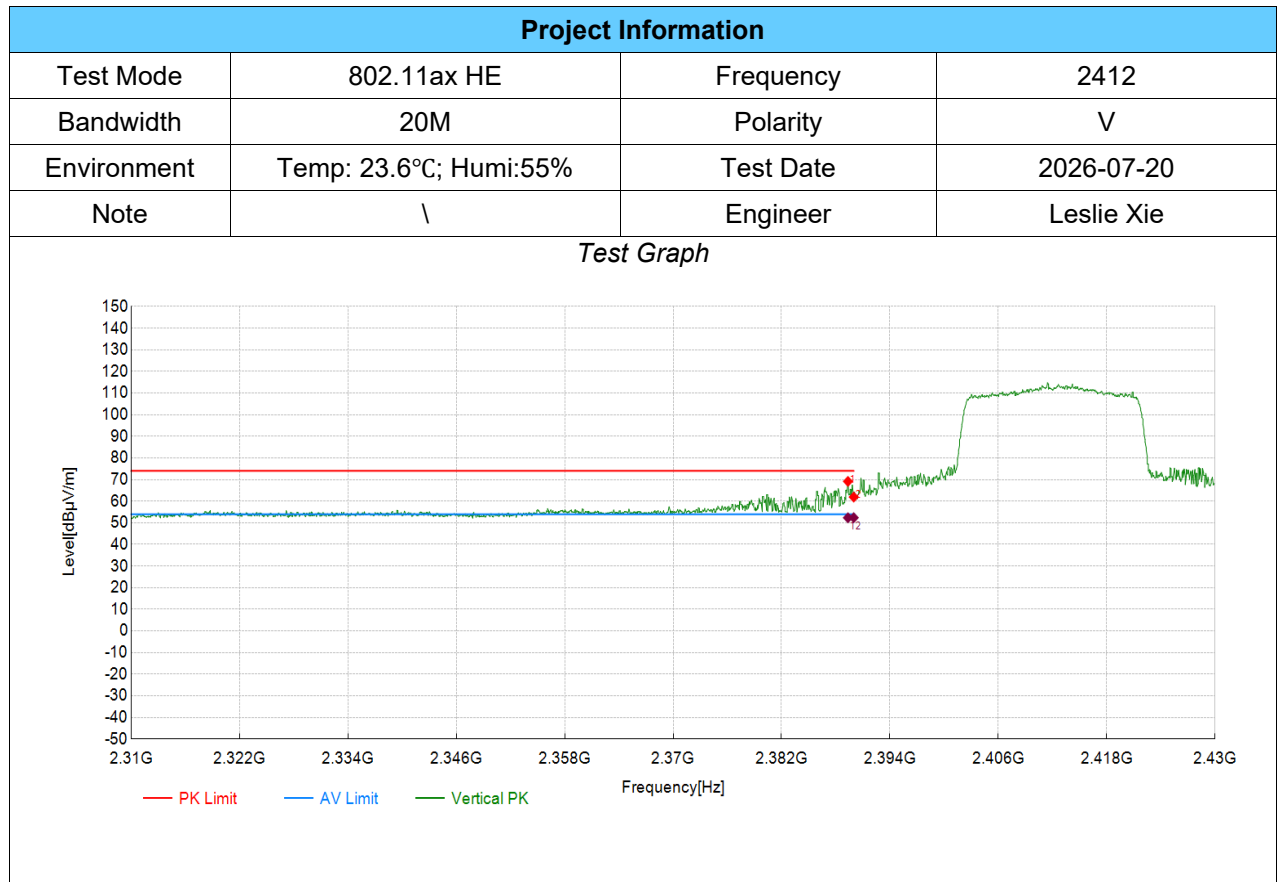


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.36	60.46	69.15	8.69	74.00	4.85	PK	Vertical	PASS
2	2390.00	53.23	61.93	8.70	74.00	12.07	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.36	8.69	43.66	52.35	54.00	1.65	Vertical	PASS
2	2390.00	8.69	43.68	52.37	54.00	1.63	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

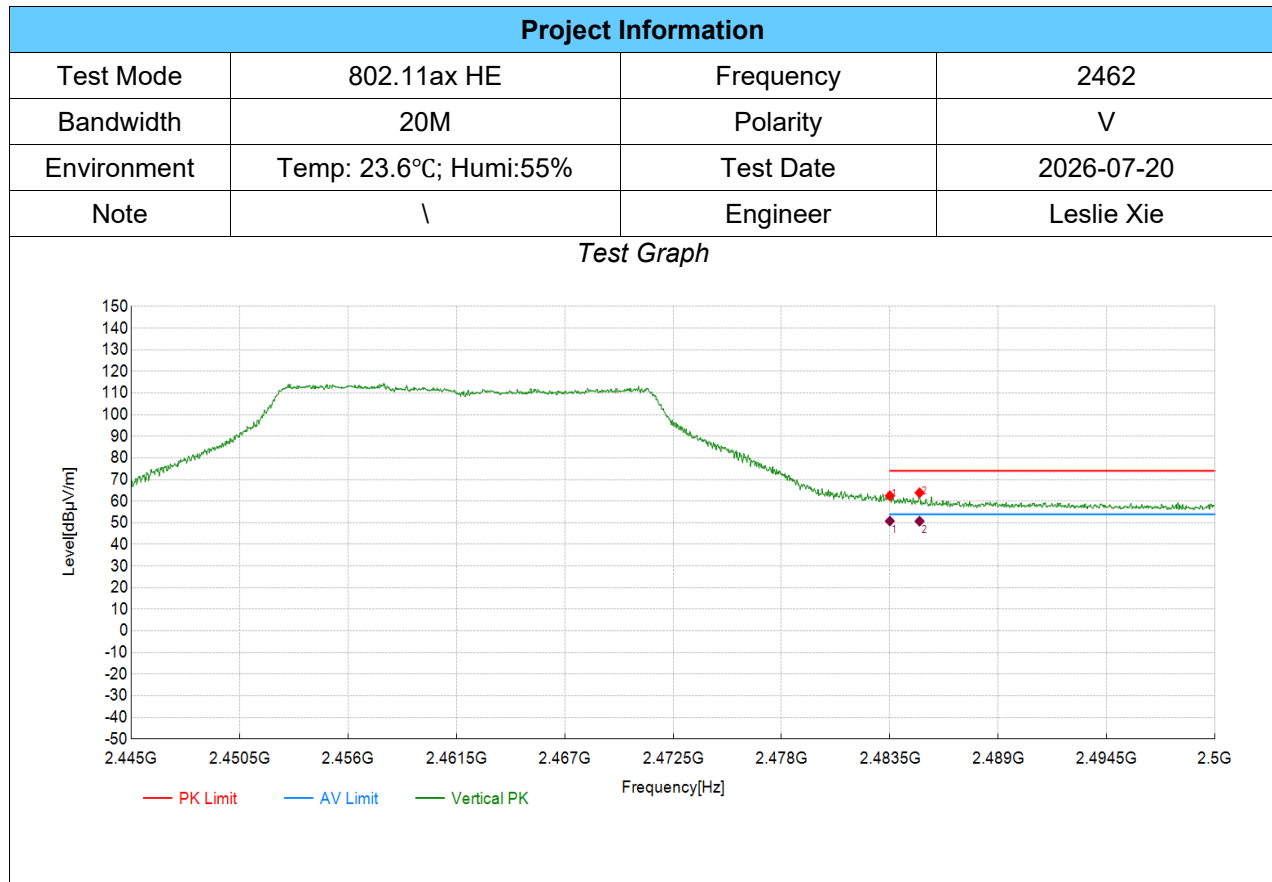

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	52.53	62.52	9.99	74.00	11.48	PK	Vertical	PASS
2	2485.01	53.88	63.89	10.01	74.00	10.11	PK	Vertical	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	40.81	50.80	54.00	3.20	Vertical	PASS
2	2485.01	10.01	40.73	50.74	54.00	3.26	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

TX Radiated Test Result

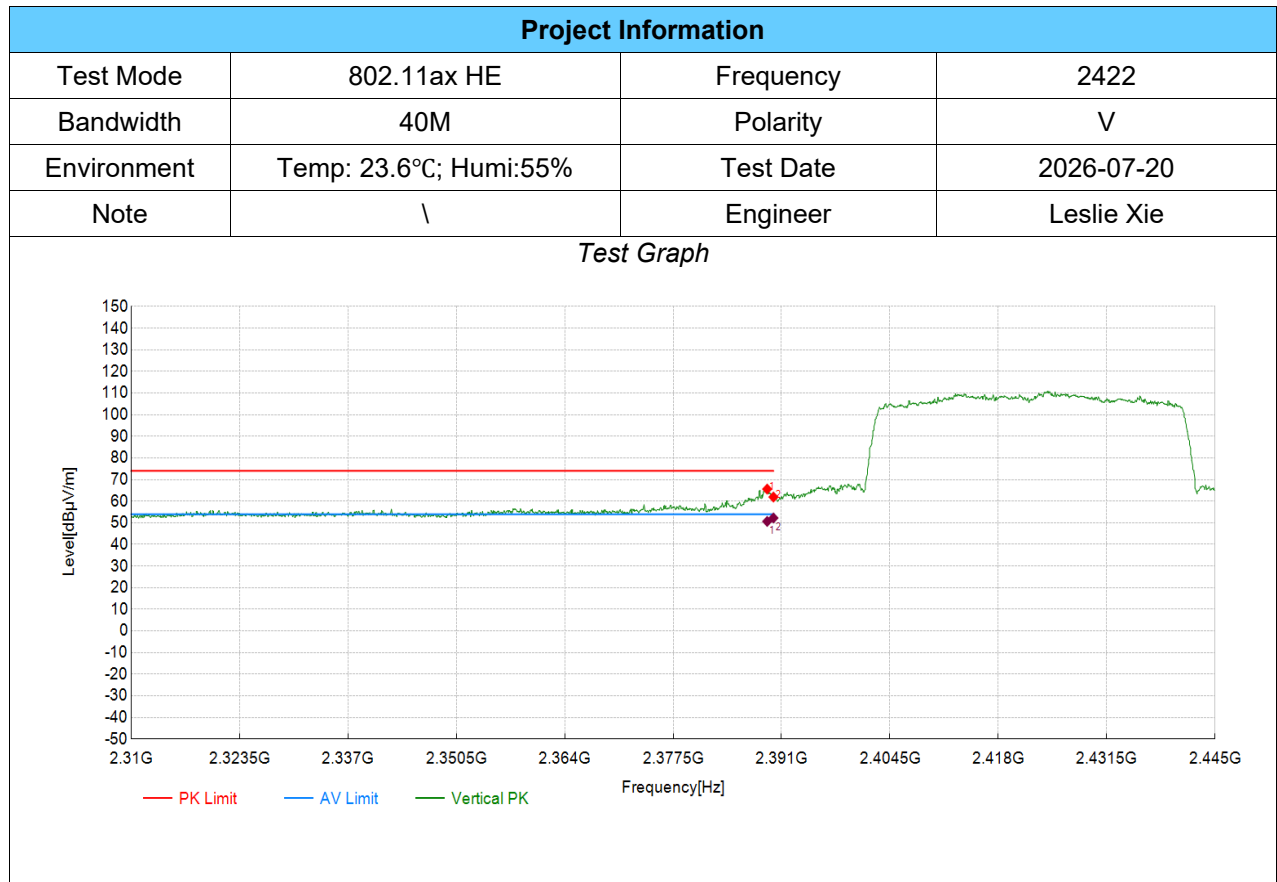


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.22	56.91	65.60	8.69	74.00	8.40	PK	Vertical	PASS
2	2390.00	53.23	61.93	8.70	74.00	12.07	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.22	8.69	41.95	50.64	54.00	3.36	Vertical	PASS
2	2390.00	8.69	43.55	52.24	54.00	1.76	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

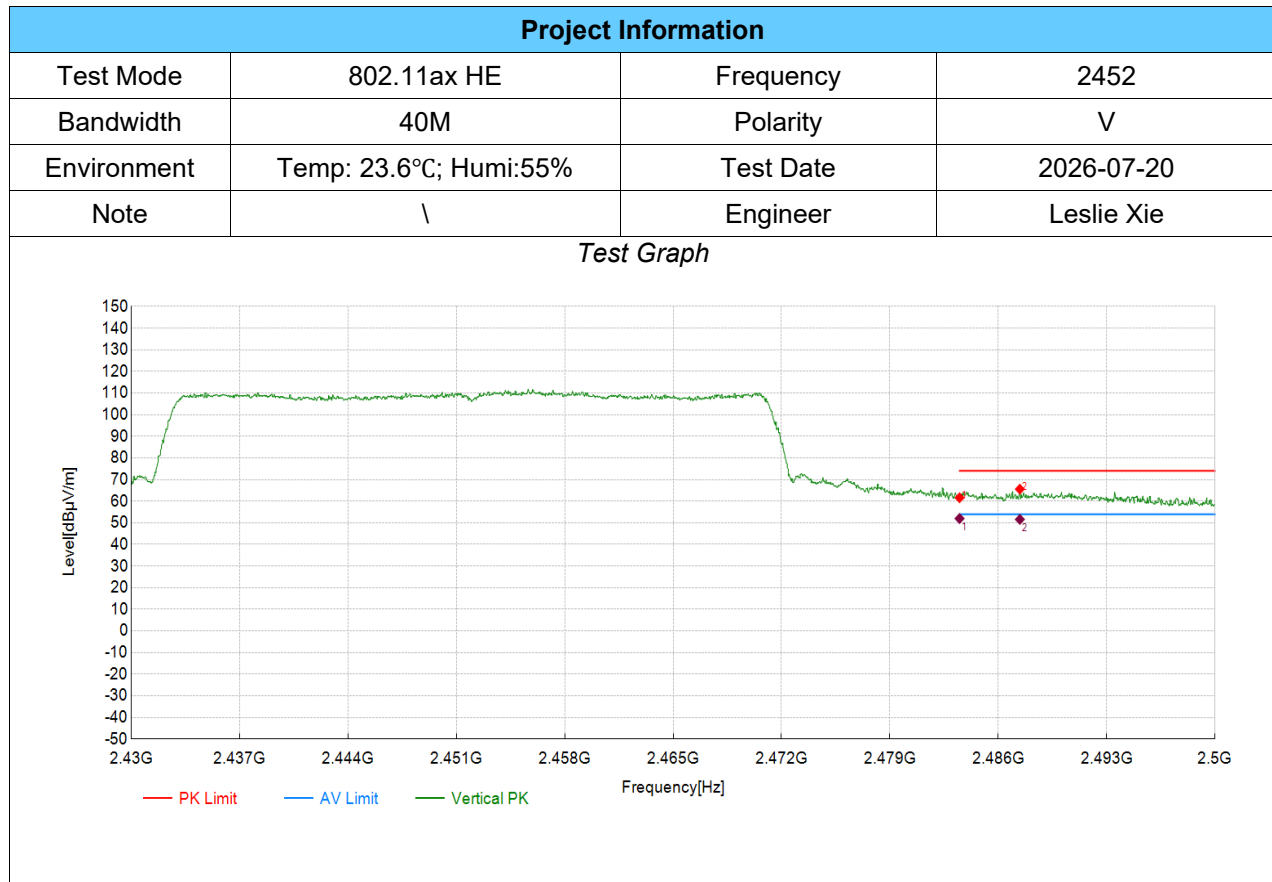

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	51.60	61.59	9.99	74.00	12.41	PK	Vertical	PASS
2	2487.39	55.53	65.57	10.04	74.00	8.43	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	9.99	41.99	51.98	54.00	2.02	Vertical	PASS
2	2487.39	10.04	41.56	51.60	54.00	2.40	Vertical	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Note: All the modes have been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)


TX Radiated Test Result

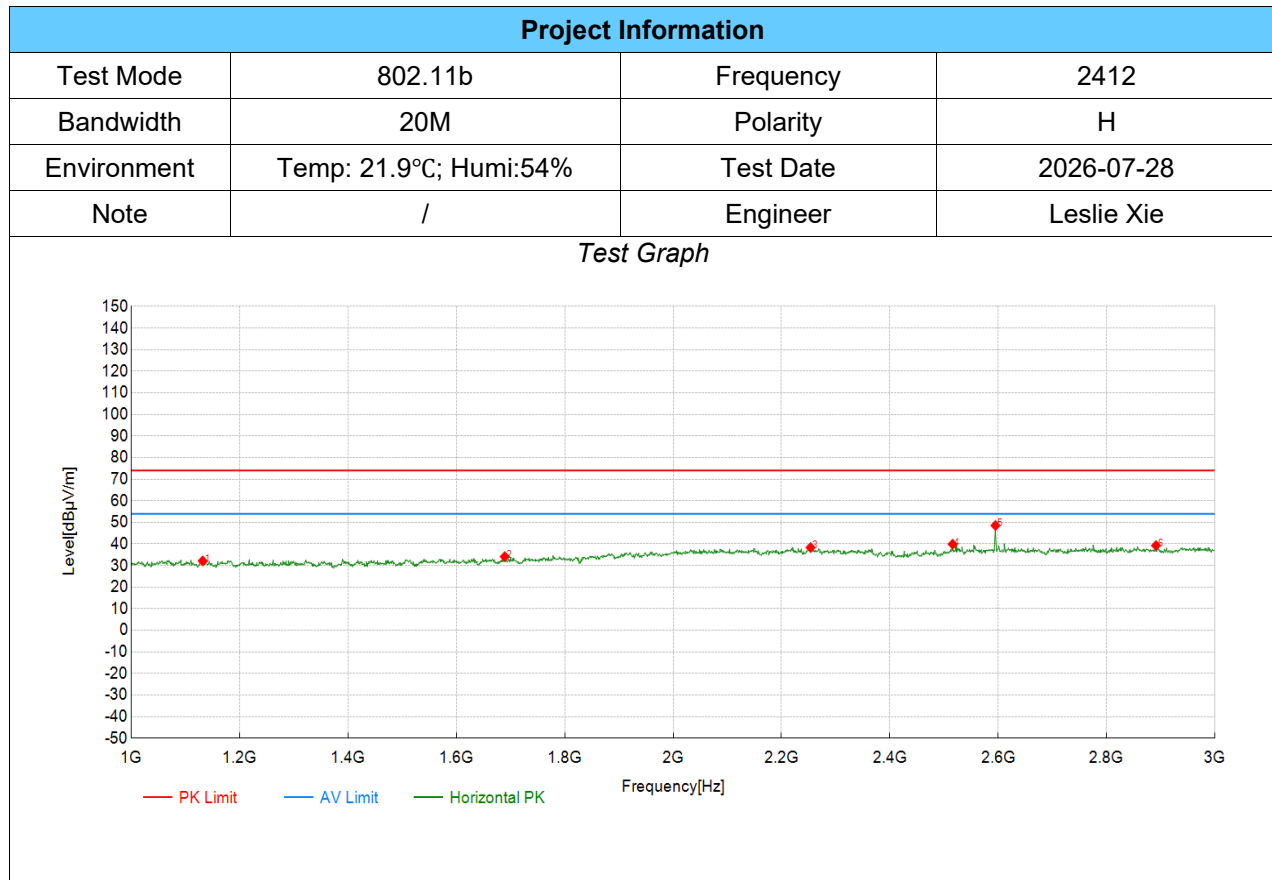

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1132.07	56.87	32.15	-24.72	74.00	41.85	PK	Horizontal	PASS
2	1689.34	57.27	34.14	-23.13	74.00	39.86	PK	Horizontal	PASS
3	2253.63	58.06	38.36	-19.70	74.00	35.64	PK	Horizontal	PASS
4	2515.76	59.50	39.89	-19.61	74.00	34.11	PK	Horizontal	PASS
5	2594.80	68.02	48.55	-19.47	74.00	25.45	PK	Horizontal	PASS
6	2890.95	58.35	39.28	-19.07	74.00	34.72	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

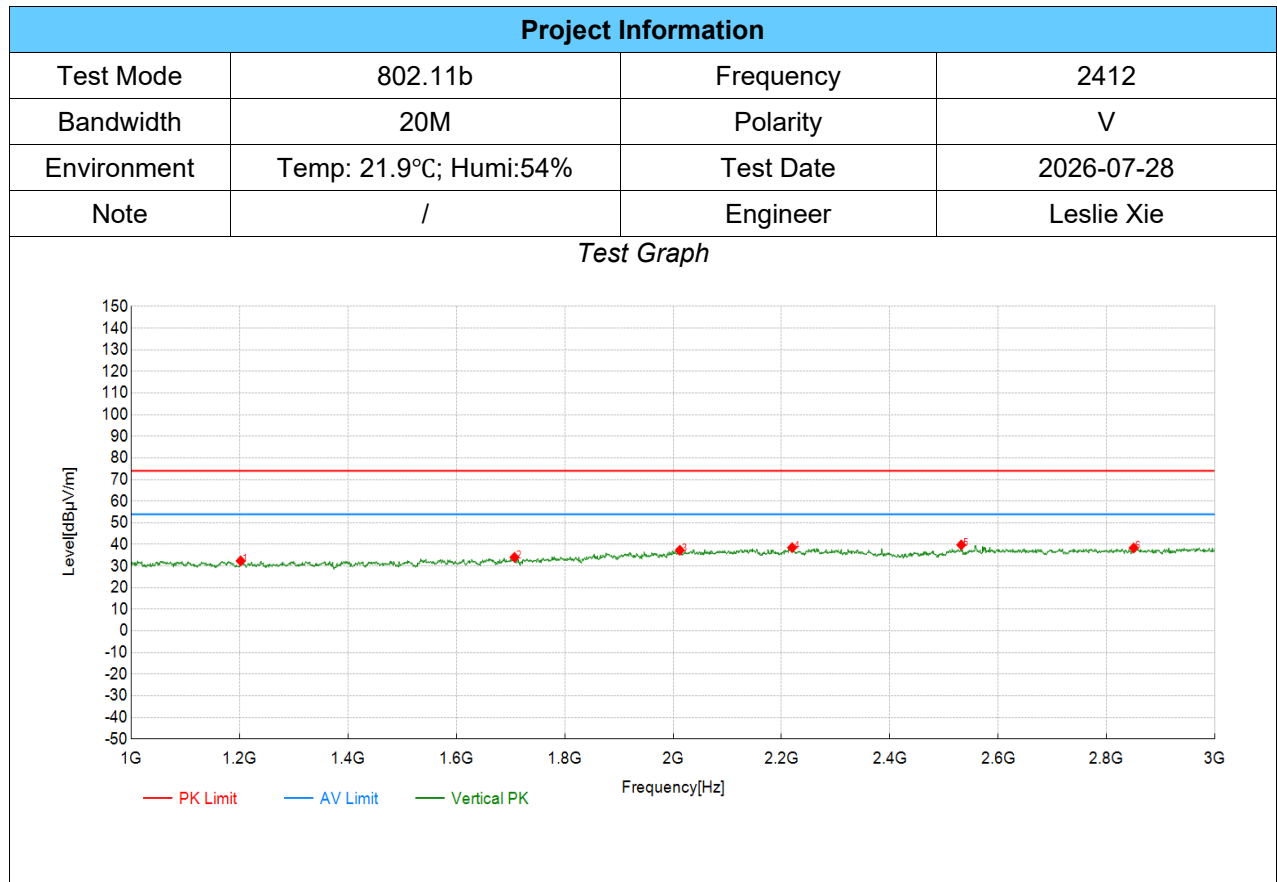

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1202.10	56.96	32.37	-24.59	74.00	41.63	PK	Vertical	PASS
2	1707.35	57.03	34.04	-22.99	74.00	39.96	PK	Vertical	PASS
3	2012.51	57.38	37.30	-20.08	74.00	36.70	PK	Vertical	PASS
4	2219.61	58.24	38.53	-19.71	74.00	35.47	PK	Vertical	PASS
5	2531.77	59.36	39.79	-19.57	74.00	34.21	PK	Vertical	PASS
6	2849.92	57.46	38.36	-19.10	74.00	35.64	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

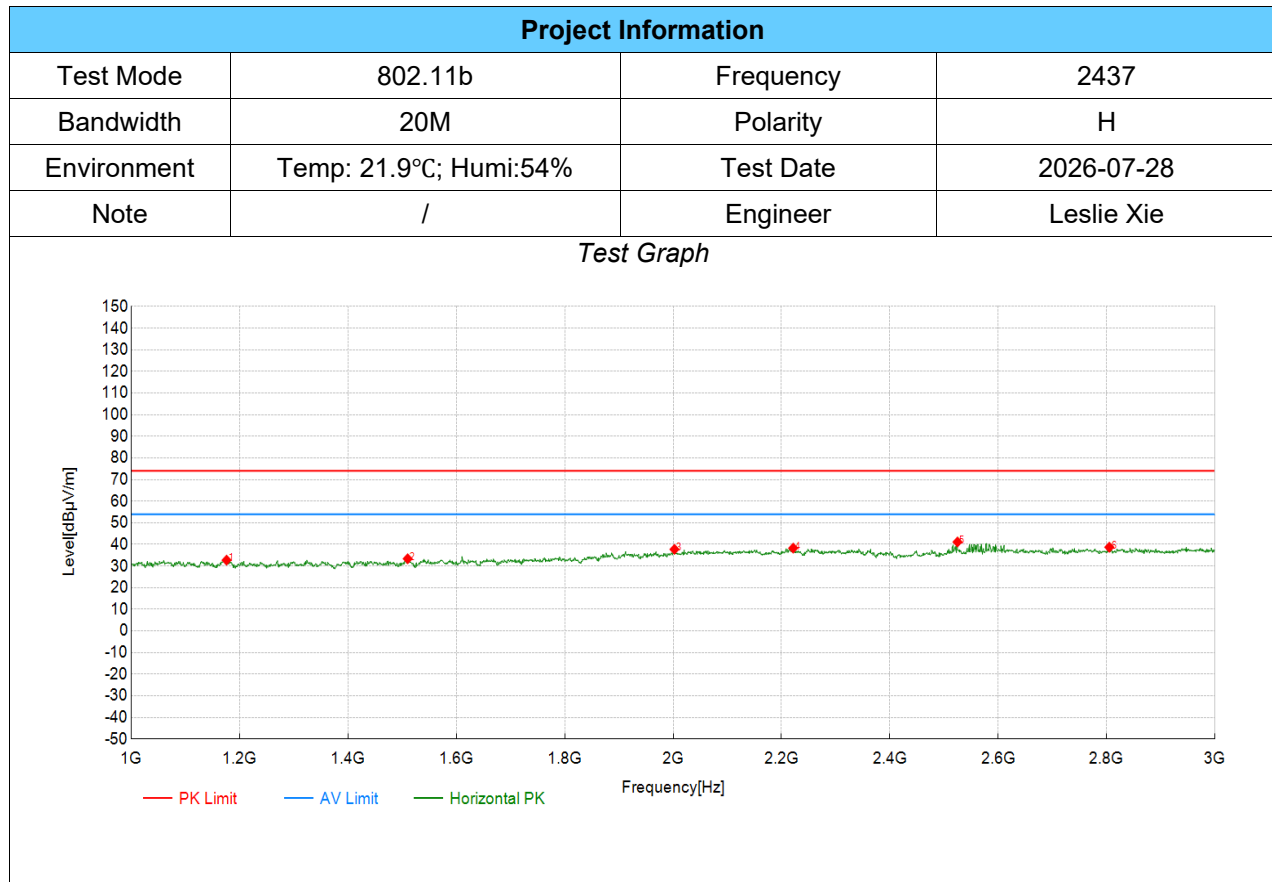

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1176.09	57.38	32.74	-24.64	74.00	41.26	PK	Horizontal	PASS
2	1510.26	57.89	33.37	-24.52	74.00	40.63	PK	Horizontal	PASS
3	2002.50	57.85	37.75	-20.10	74.00	36.25	PK	Horizontal	PASS
4	2221.61	58.01	38.30	-19.71	74.00	35.70	PK	Horizontal	PASS
5	2524.76	60.72	41.14	-19.58	74.00	32.86	PK	Horizontal	PASS
6	2804.90	57.83	38.71	-19.12	74.00	35.29	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

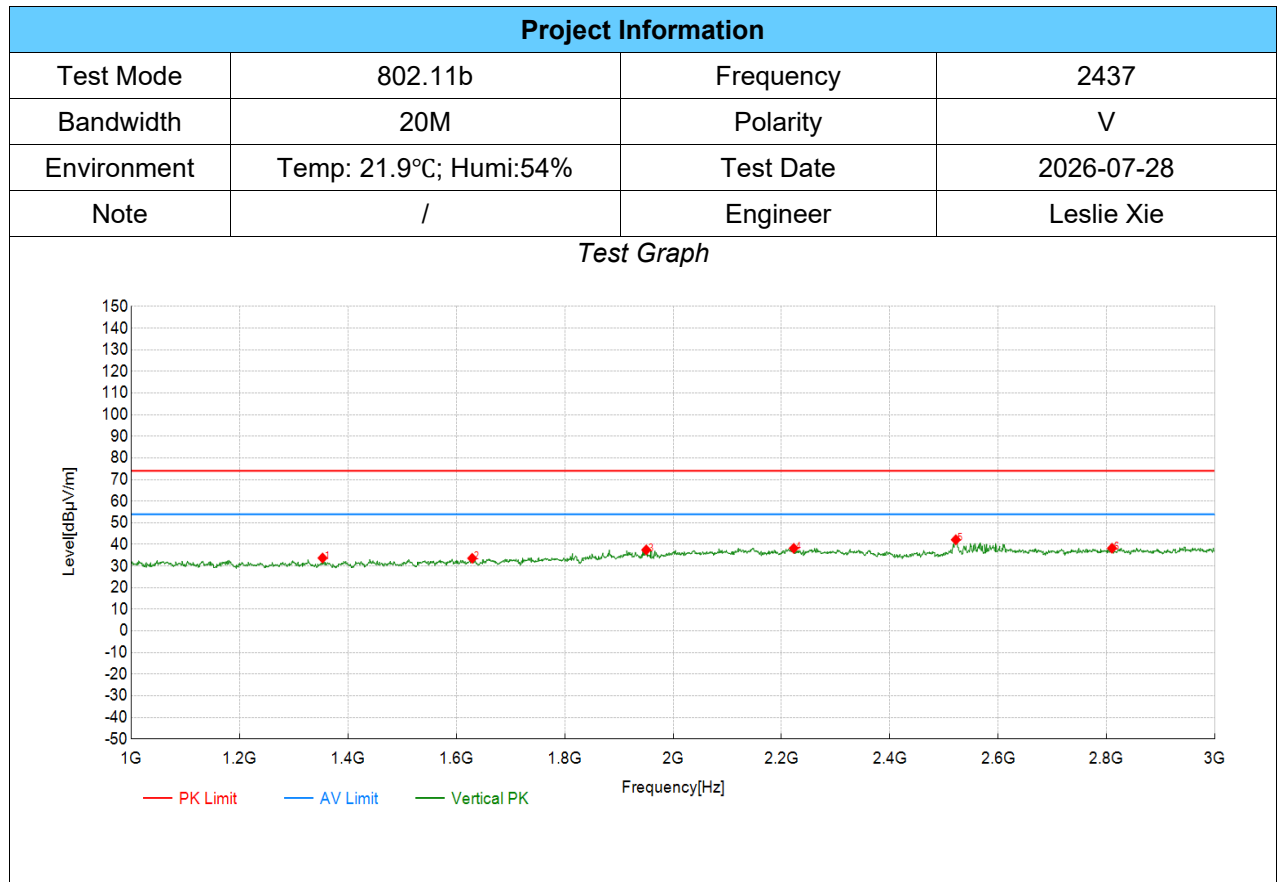

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1353.18	58.34	33.72	-24.62	74.00	40.28	PK	Vertical	PASS
2	1629.31	57.17	33.58	-23.59	74.00	40.42	PK	Vertical	PASS
3	1950.48	58.13	37.48	-20.65	74.00	36.52	PK	Vertical	PASS
4	2222.61	57.91	38.20	-19.71	74.00	35.80	PK	Vertical	PASS
5	2521.76	61.75	42.17	-19.58	74.00	31.83	PK	Vertical	PASS
6	2809.90	57.37	38.24	-19.13	74.00	35.76	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

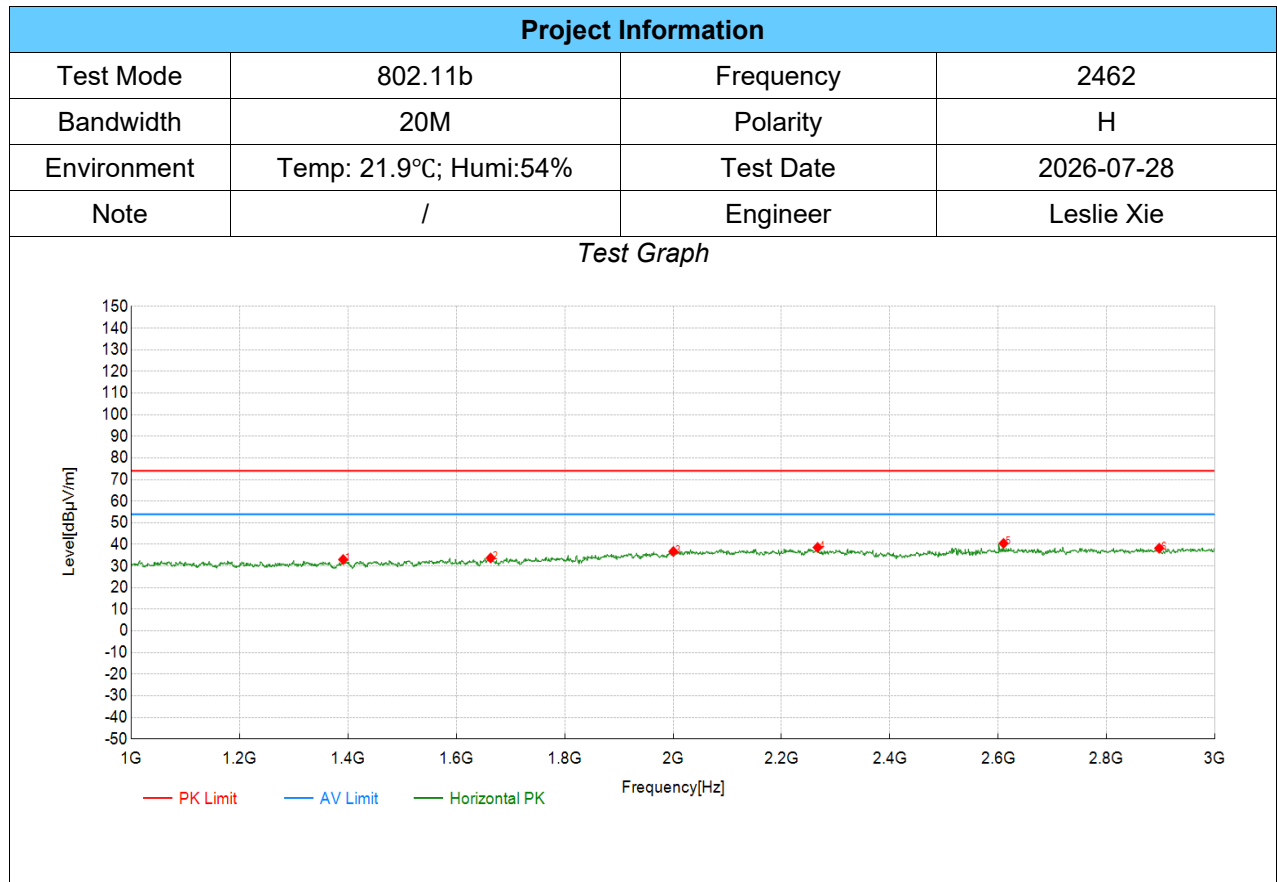

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1391.20	57.63	33.00	-24.63	74.00	41.00	PK	Horizontal	PASS
2	1663.33	57.06	33.74	-23.32	74.00	40.26	PK	Horizontal	PASS
3	2000.50	56.82	36.71	-20.11	74.00	37.29	PK	Horizontal	PASS
4	2266.63	58.30	38.60	-19.70	74.00	35.40	PK	Horizontal	PASS
5	2609.80	59.96	40.50	-19.46	74.00	33.50	PK	Horizontal	PASS
6	2896.95	57.32	38.25	-19.07	74.00	35.75	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

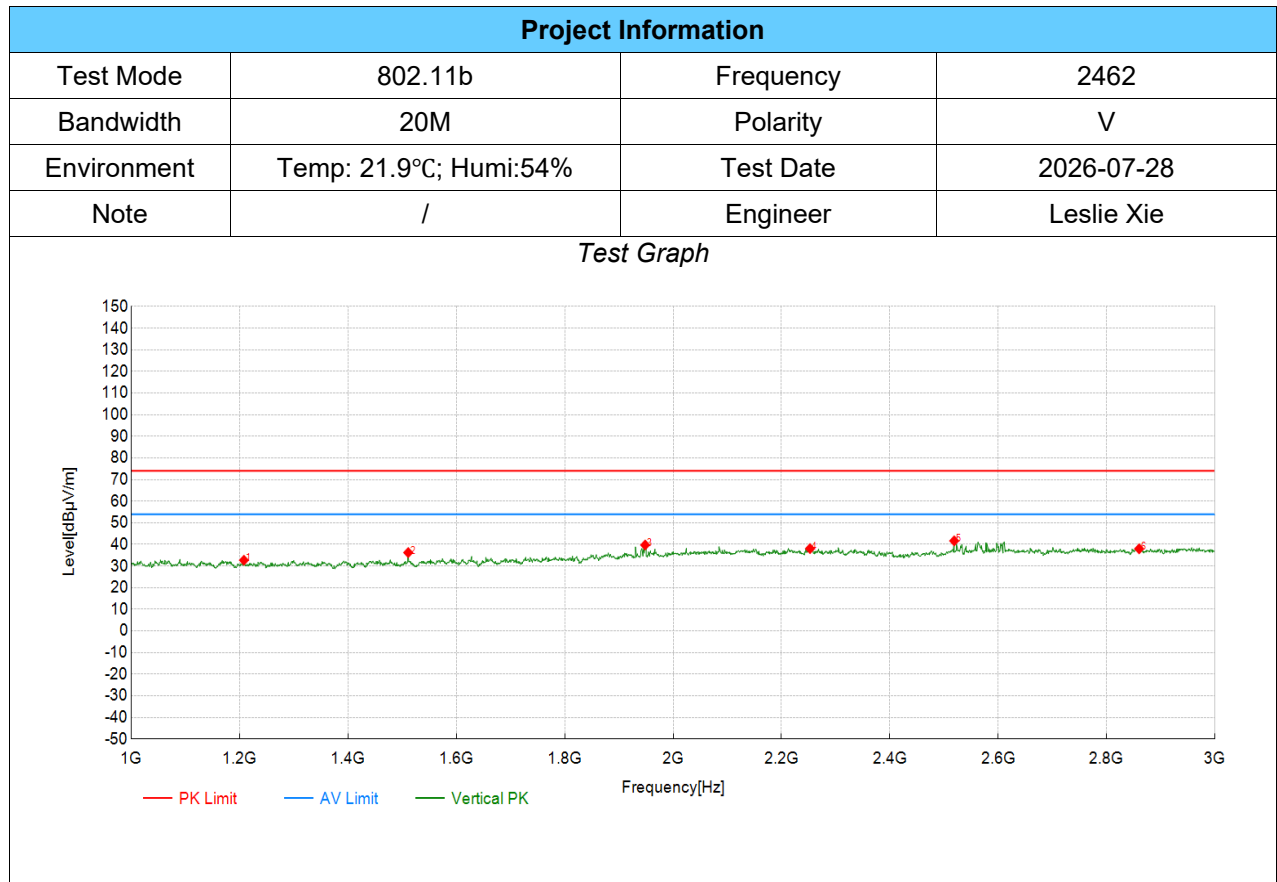


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1208.10	57.31	32.71	-24.60	74.00	41.29	PK	Vertical	PASS
2	1511.26	60.75	36.24	-24.51	74.00	37.76	PK	Vertical	PASS
3	1948.47	60.42	39.75	-20.67	74.00	34.25	PK	Vertical	PASS
4	2252.63	57.77	38.07	-19.70	74.00	35.93	PK	Vertical	PASS
5	2518.76	61.25	41.66	-19.59	74.00	32.34	PK	Vertical	PASS
6	2859.93	57.07	37.98	-19.09	74.00	36.02	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

Note: All the modes have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)


TX Radiated Test Result

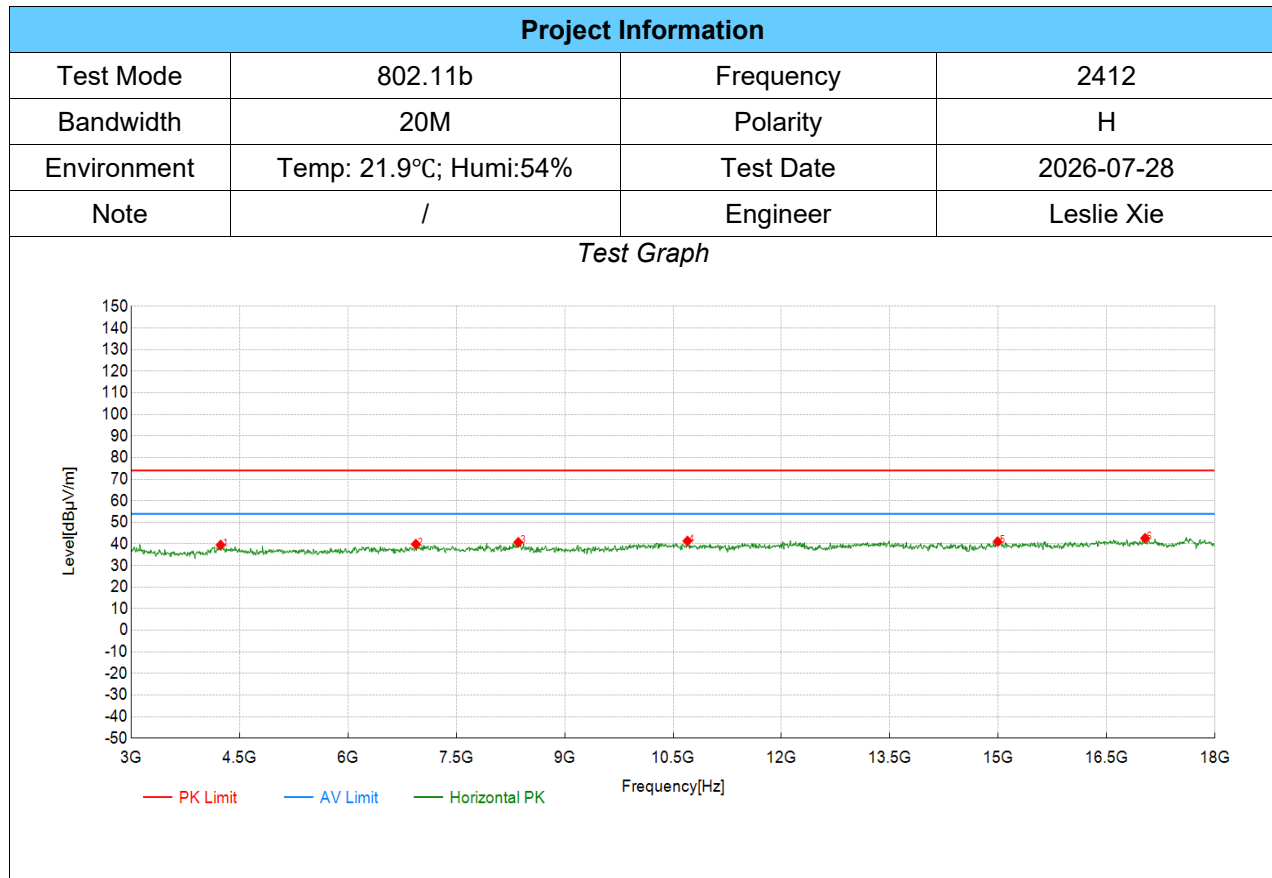

PEAK Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	57.09	39.51	-17.58	74.00	34.49	PK	Horizontal	PASS
2	6939.47	54.99	39.91	-15.08	74.00	34.09	PK	Horizontal	PASS
3	8357.68	53.63	40.78	-12.85	74.00	33.22	PK	Horizontal	PASS
4	10698.85	50.68	41.37	-9.31	74.00	32.63	PK	Horizontal	PASS
5	14991.00	50.35	41.07	-9.28	74.00	32.93	PK	Horizontal	PASS
6	17032.02	49.92	42.66	-7.26	74.00	31.34	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

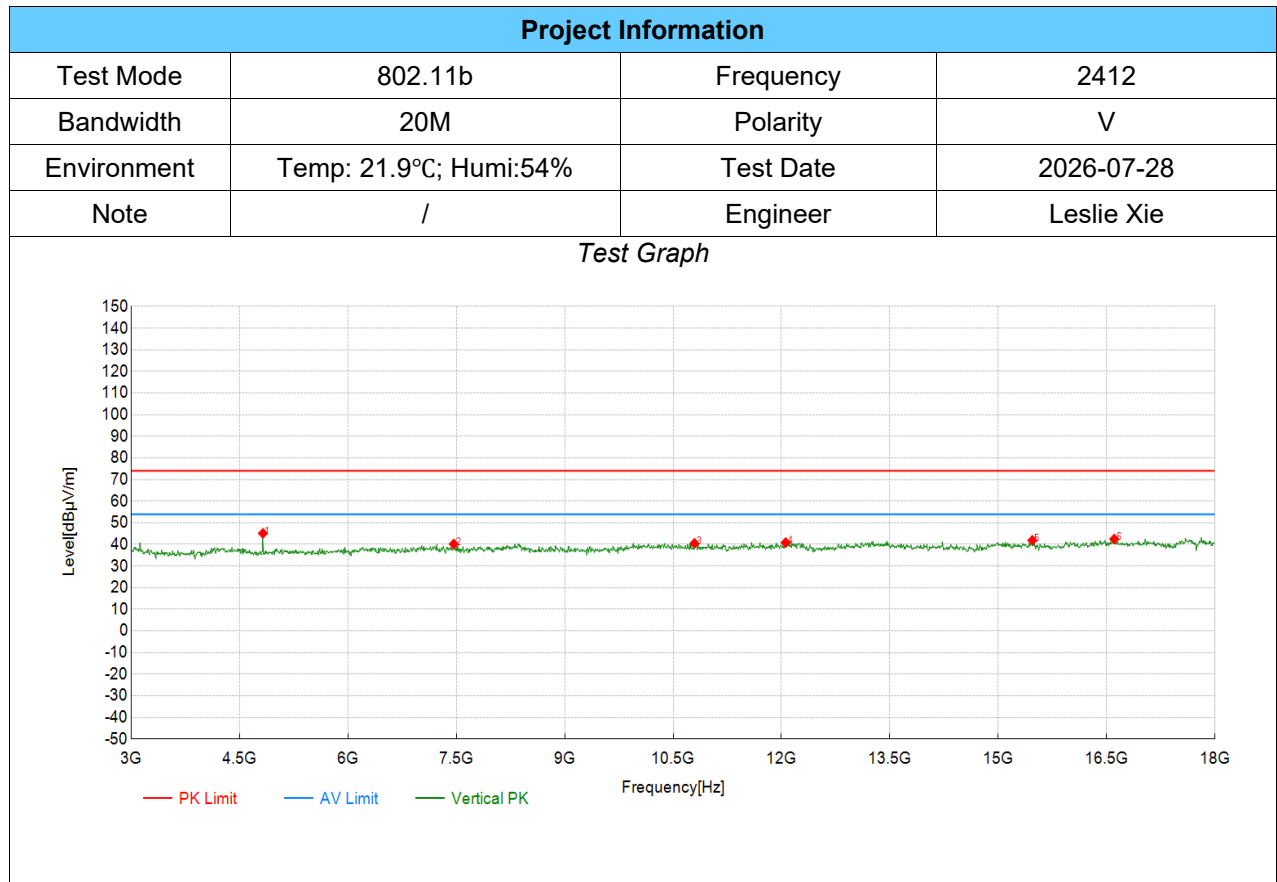

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4823.41	63.61	45.14	-18.47	74.00	28.86	PK	Vertical	PASS
2	7464.73	55.49	40.19	-15.30	74.00	33.81	PK	Vertical	PASS
3	10796.40	49.63	40.51	-9.12	74.00	33.49	PK	Vertical	PASS
4	12057.03	50.51	40.85	-9.66	74.00	33.15	PK	Vertical	PASS
5	15471.24	51.28	41.92	-9.36	74.00	32.08	PK	Vertical	PASS
6	16604.30	50.04	42.48	-7.56	74.00	31.52	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

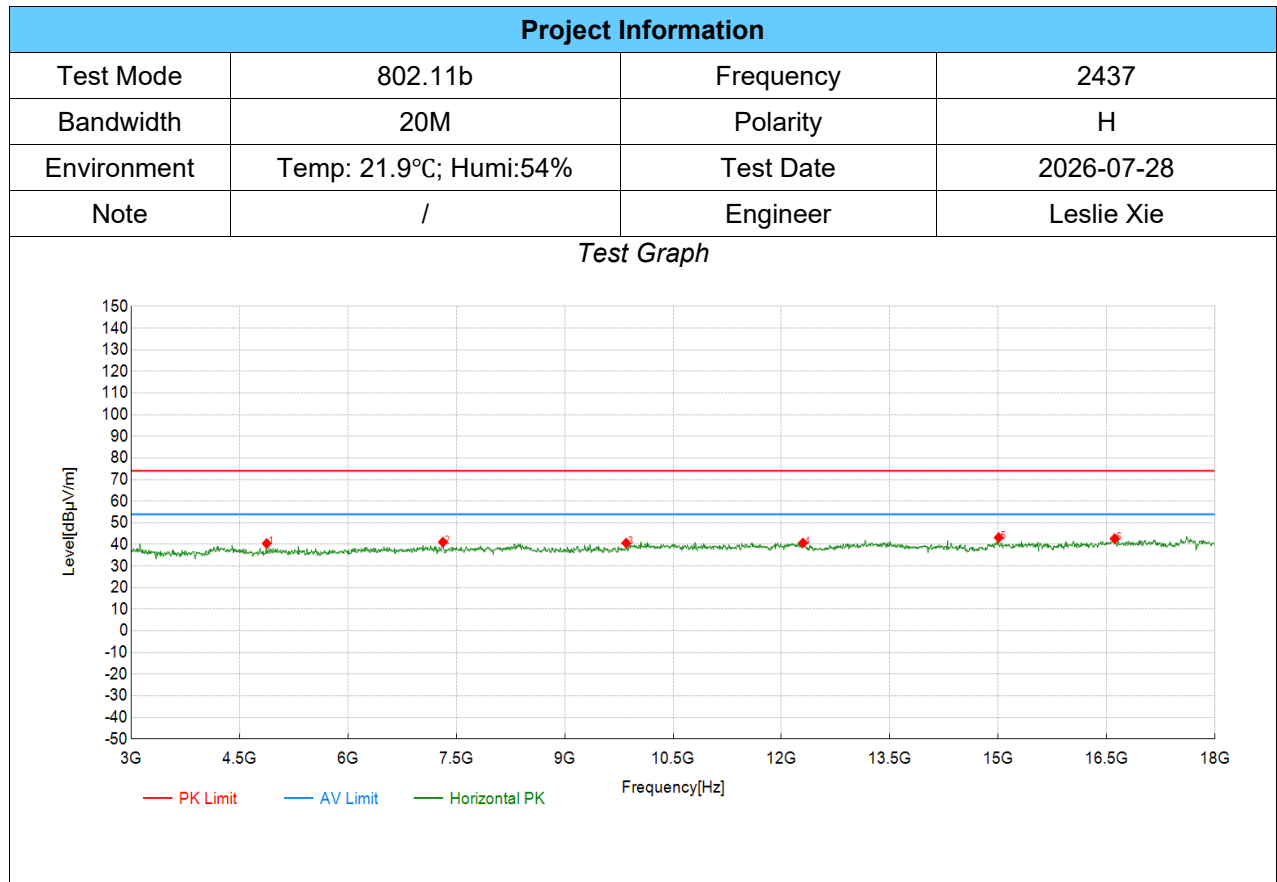

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4875.94	58.64	40.45	-18.19	74.00	33.55	PK	Horizontal	PASS
2	7314.66	56.28	41.10	-15.18	74.00	32.90	PK	Horizontal	PASS
3	9850.93	52.31	40.64	-11.67	74.00	33.36	PK	Horizontal	PASS
4	12297.15	51.05	40.67	-10.38	74.00	33.33	PK	Horizontal	PASS
5	15006.00	52.45	43.18	-9.27	74.00	30.82	PK	Horizontal	PASS
6	16611.81	50.24	42.67	-7.57	74.00	31.33	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

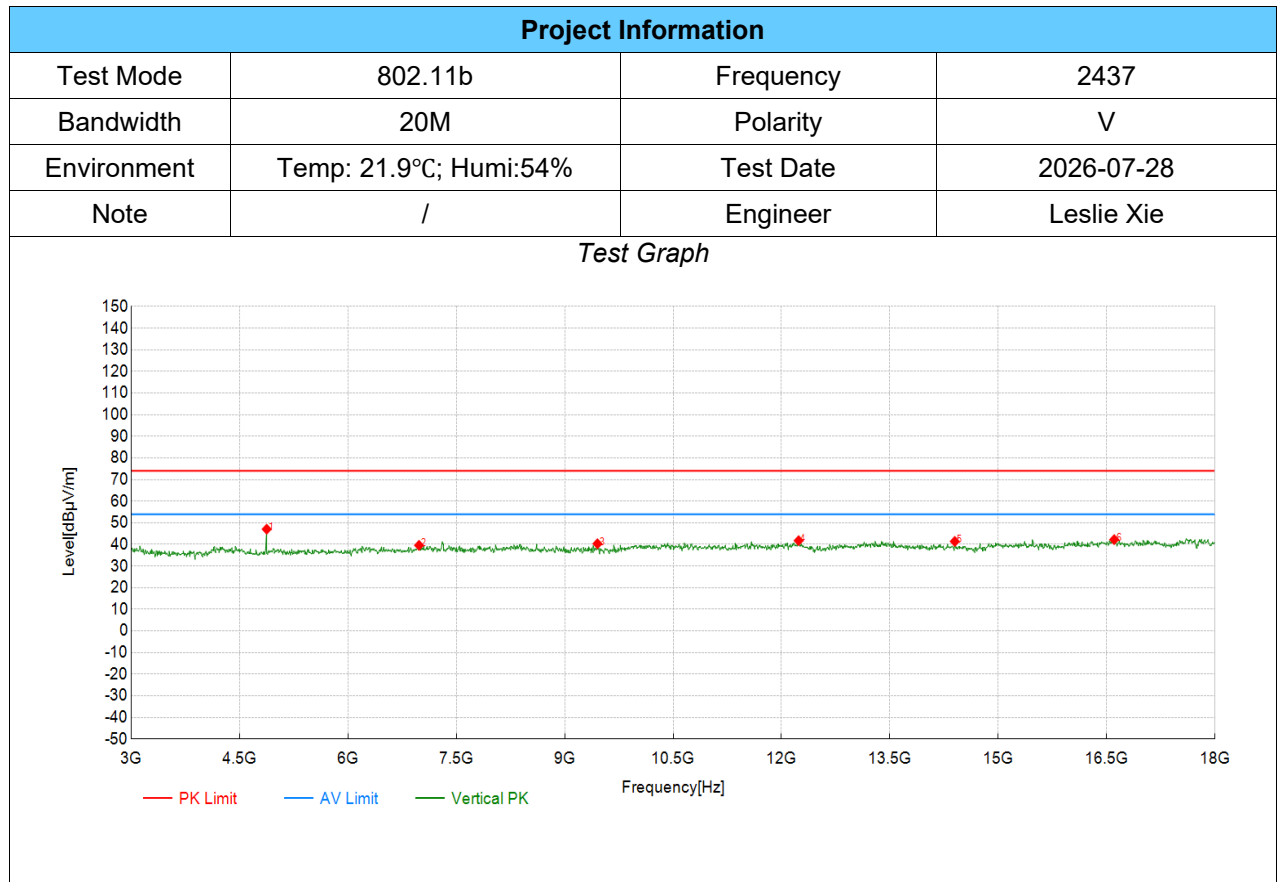

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4875.94	65.25	47.06	-18.19	74.00	26.94	PK	Vertical	PASS
2	6984.49	54.48	39.59	-14.89	74.00	34.41	PK	Vertical	PASS
3	9453.23	51.93	40.33	-11.60	74.00	33.67	PK	Vertical	PASS
4	12237.12	51.77	41.77	-10.00	74.00	32.23	PK	Vertical	PASS
5	14398.20	52.59	41.39	-11.20	74.00	32.61	PK	Vertical	PASS
6	16604.30	49.79	42.23	-7.56	74.00	31.77	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

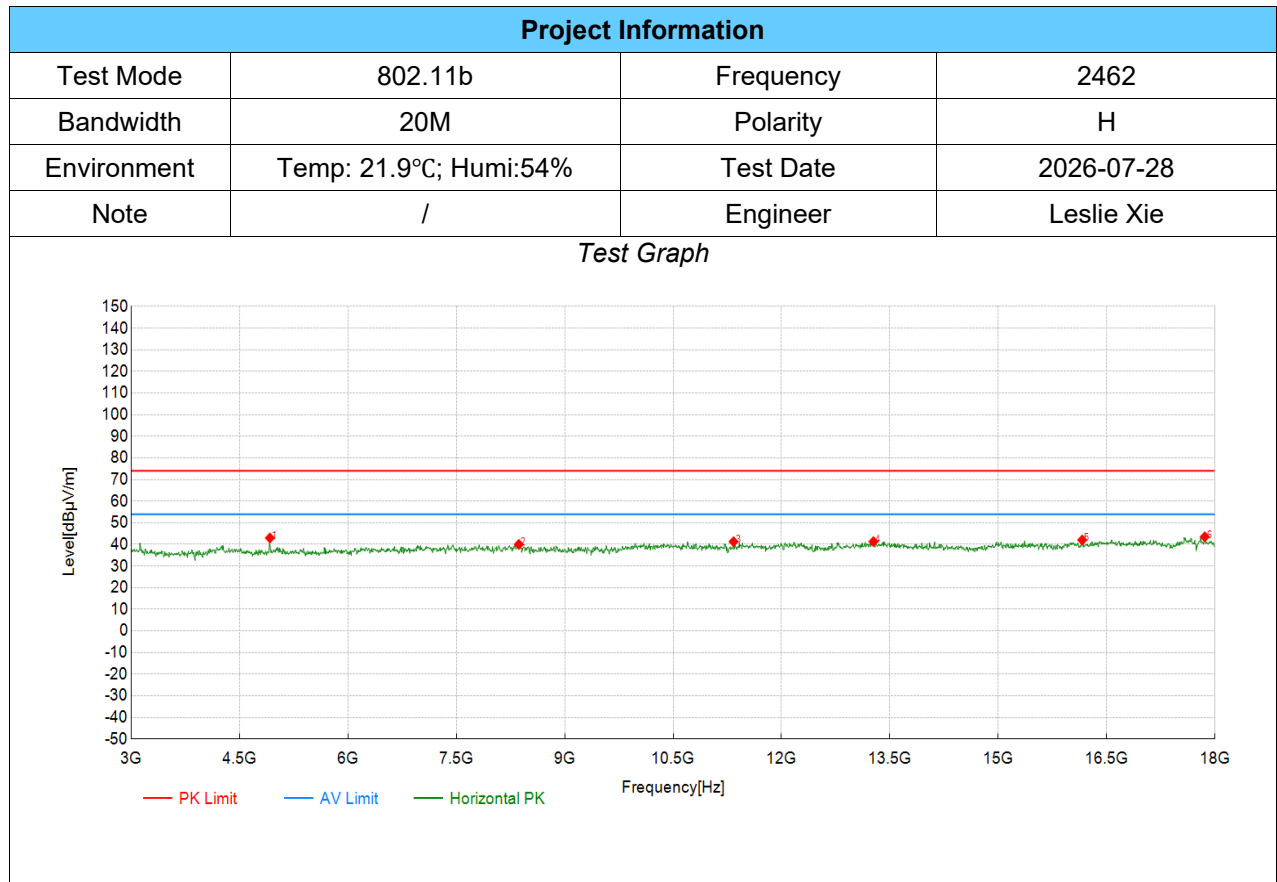

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4920.96	60.92	42.98	-17.94	74.00	31.02	PK	Horizontal	PASS
2	8365.18	52.79	40.01	-12.78	74.00	33.99	PK	Horizontal	PASS
3	11336.67	50.16	41.28	-8.88	74.00	32.72	PK	Horizontal	PASS
4	13272.64	52.32	41.32	-11.00	74.00	32.68	PK	Horizontal	PASS
5	16161.58	50.68	42.06	-8.62	74.00	31.94	PK	Horizontal	PASS
6	17857.43	48.87	43.54	-5.33	74.00	30.46	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

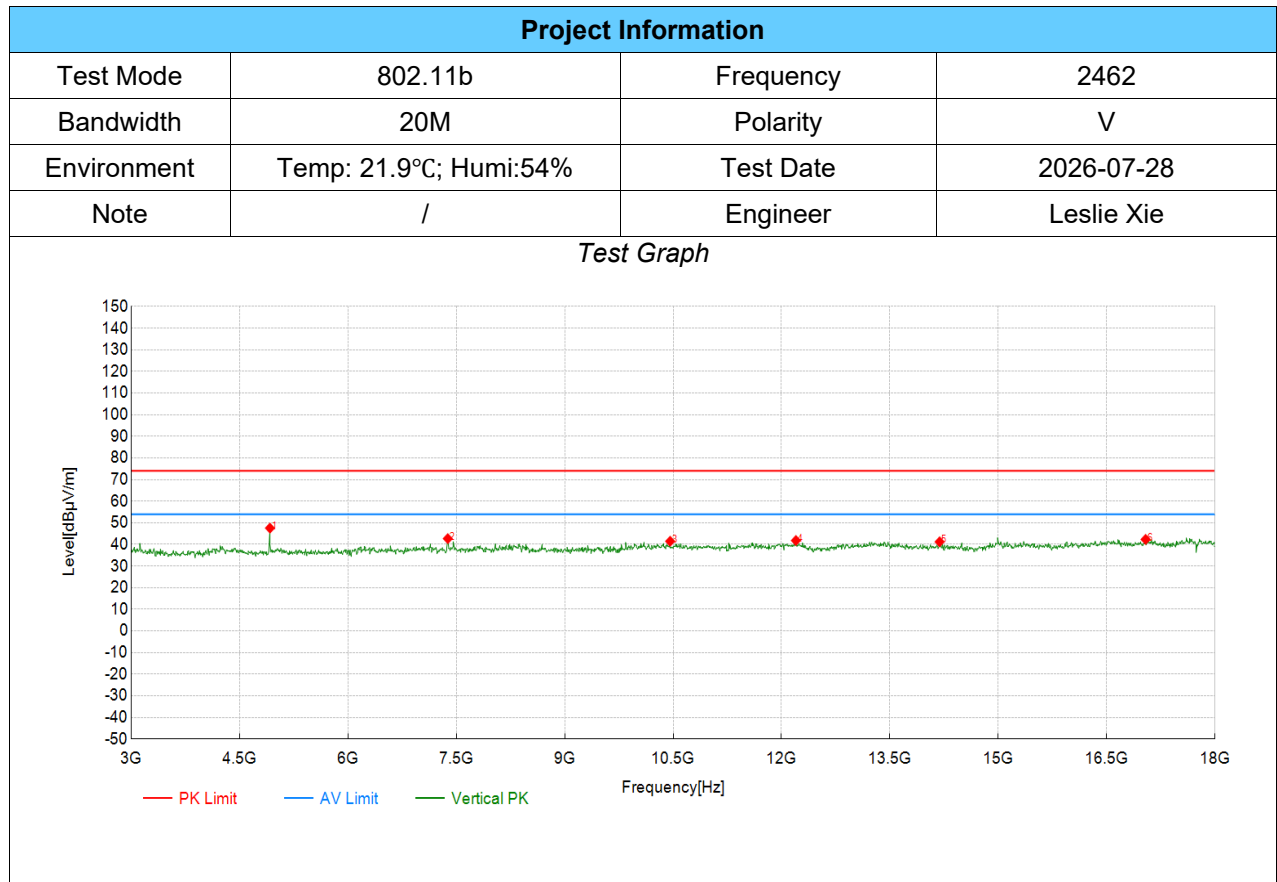

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4920.96	65.49	47.55	-17.94	74.00	26.45	PK	Vertical	PASS
2	7382.19	57.82	42.68	-15.14	74.00	31.32	PK	Vertical	PASS
3	10458.73	51.06	41.47	-9.59	74.00	32.53	PK	Vertical	PASS
4	12199.60	51.58	41.82	-9.76	74.00	32.18	PK	Vertical	PASS
5	14188.09	51.84	41.22	-10.62	74.00	32.78	PK	Vertical	PASS
6	17039.52	49.56	42.32	-7.24	74.00	31.68	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

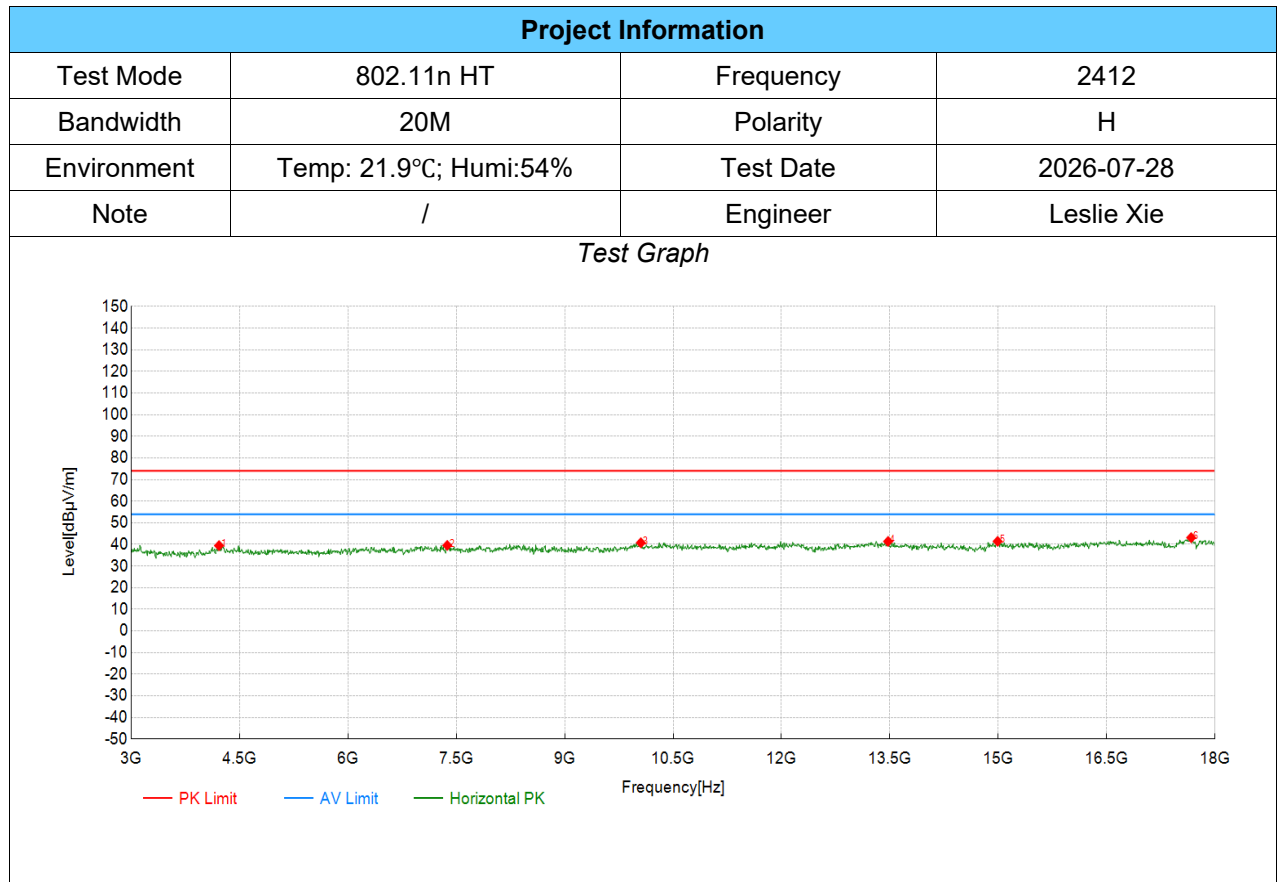

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4215.61	56.99	39.46	-17.53	74.00	34.54	PK	Horizontal	PASS
2	7374.69	54.71	39.56	-15.15	74.00	34.44	PK	Horizontal	PASS
3	10053.53	51.59	40.76	-10.83	74.00	33.24	PK	Horizontal	PASS
4	13475.24	53.15	41.39	-11.76	74.00	32.61	PK	Horizontal	PASS
5	14991.00	50.72	41.44	-9.28	74.00	32.56	PK	Horizontal	PASS
6	17669.83	48.18	43.14	-5.04	74.00	30.86	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

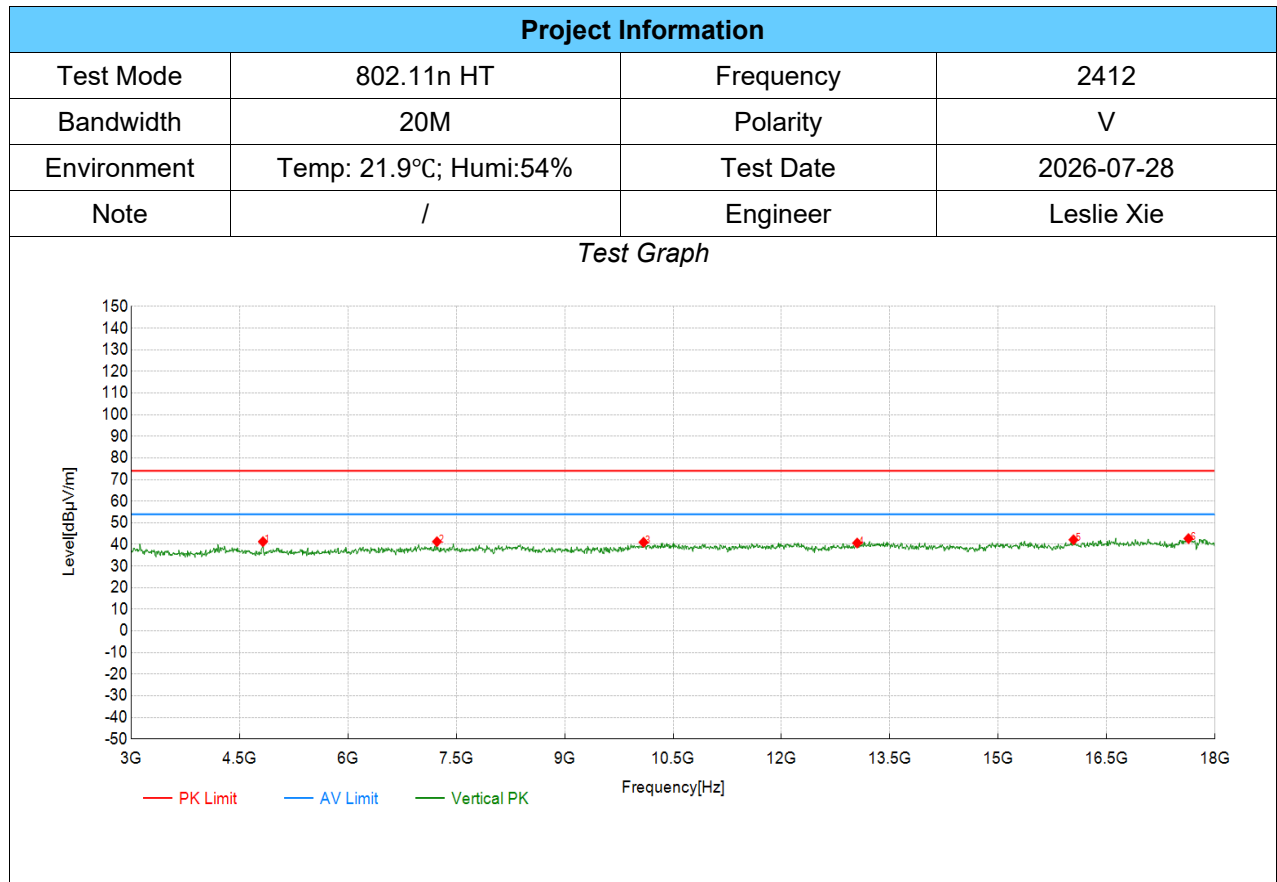

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4823.41	59.75	41.28	-18.47	74.00	32.72	PK	Vertical	PASS
2	7232.12	56.50	41.28	-15.22	74.00	32.72	PK	Vertical	PASS
3	10091.05	51.97	41.01	-10.96	74.00	32.99	PK	Vertical	PASS
4	13047.52	52.05	40.64	-11.41	74.00	33.36	PK	Vertical	PASS
5	16041.52	50.46	42.16	-8.30	74.00	31.84	PK	Vertical	PASS
6	17632.32	47.74	42.72	-5.02	74.00	31.28	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

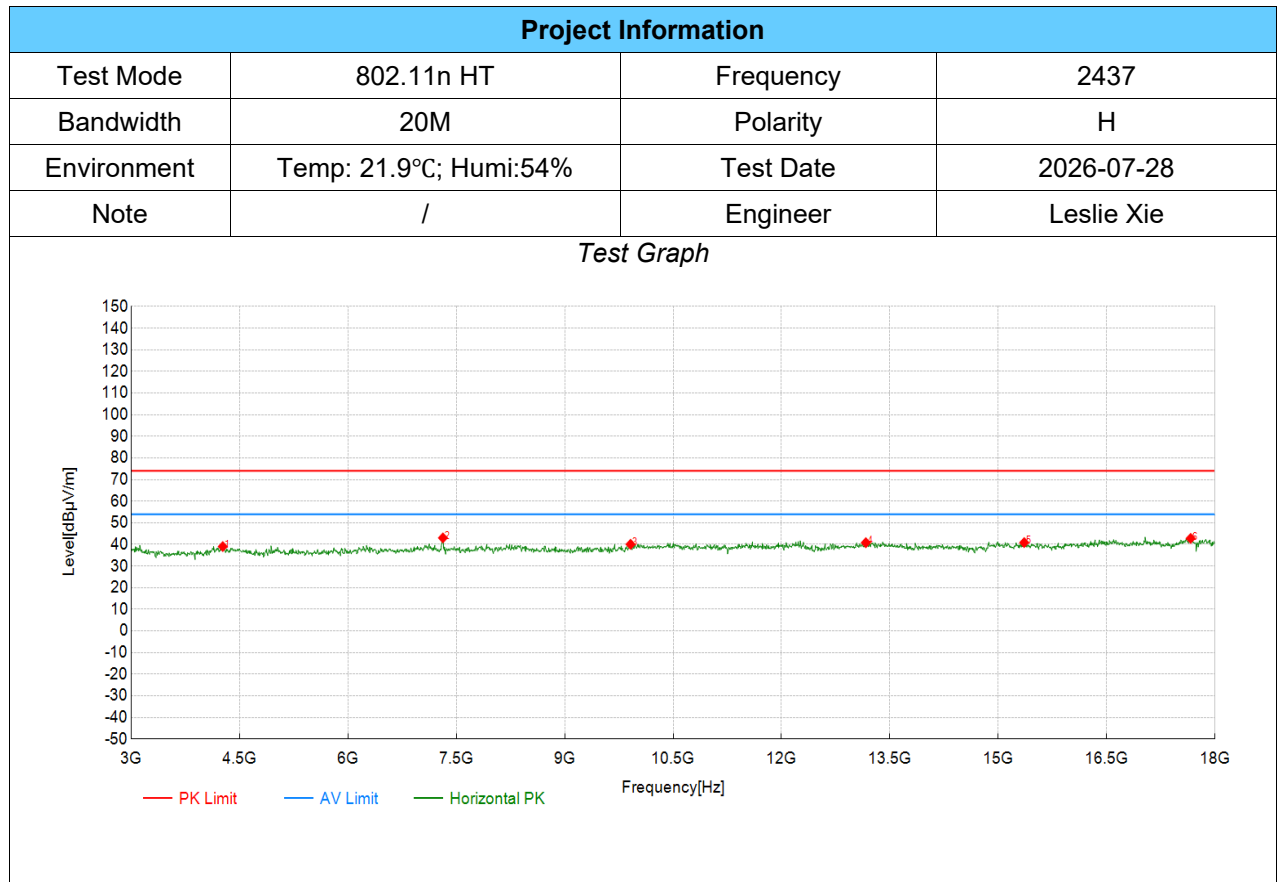

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4268.13	56.69	39.03	-17.66	74.00	34.97	PK	Horizontal	PASS
2	7314.66	58.22	43.04	-15.18	74.00	30.96	PK	Horizontal	PASS
3	9910.96	51.32	40.06	-11.26	74.00	33.94	PK	Horizontal	PASS
4	13167.58	51.74	40.80	-10.94	74.00	33.20	PK	Horizontal	PASS
5	15358.68	50.30	40.87	-9.43	74.00	33.13	PK	Horizontal	PASS
6	17662.33	47.83	42.79	-5.04	74.00	31.21	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

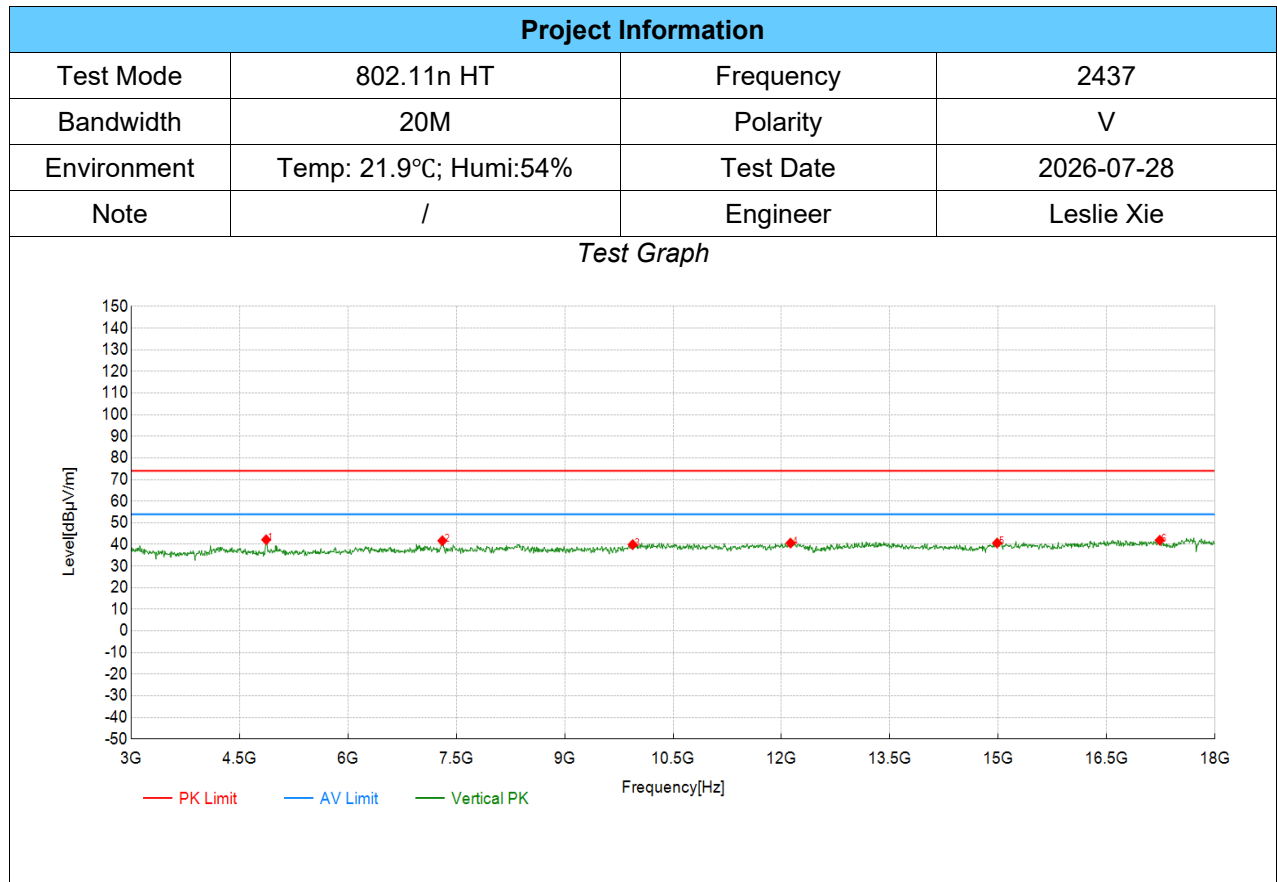

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4868.43	60.41	42.18	-18.23	74.00	31.82	PK	Vertical	PASS
2	7307.15	56.89	41.71	-15.18	74.00	32.29	PK	Vertical	PASS
3	9940.97	50.94	39.90	-11.04	74.00	34.10	PK	Vertical	PASS
4	12124.56	50.35	40.64	-9.71	74.00	33.36	PK	Vertical	PASS
5	14983.49	49.96	40.66	-9.30	74.00	33.34	PK	Vertical	PASS
6	17234.62	49.00	41.94	-7.06	74.00	32.06	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

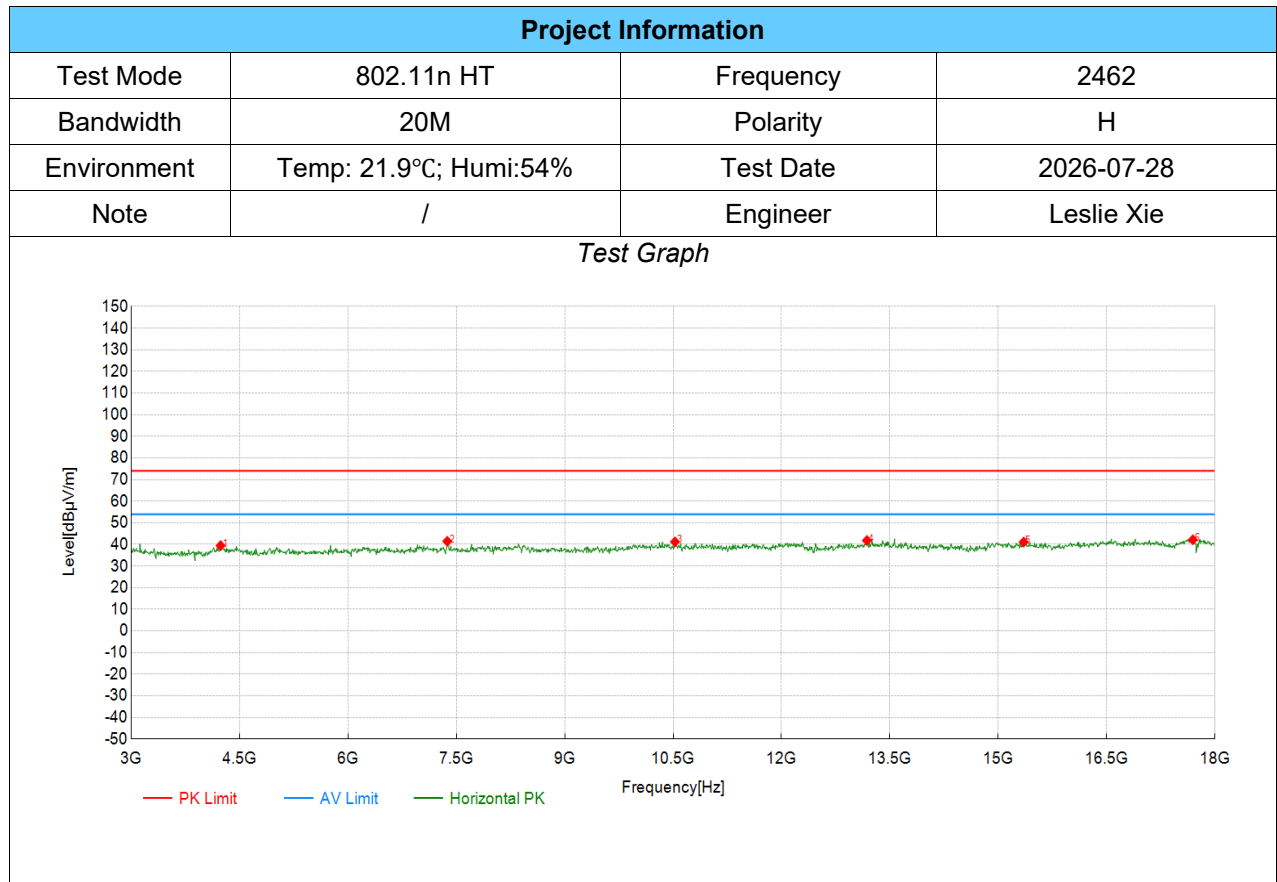

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4238.12	57.04	39.46	-17.58	74.00	34.54	PK	Horizontal	PASS
2	7374.69	56.64	41.49	-15.15	74.00	32.51	PK	Horizontal	PASS
3	10526.26	50.76	41.21	-9.55	74.00	32.79	PK	Horizontal	PASS
4	13182.59	52.72	41.83	-10.89	74.00	32.17	PK	Horizontal	PASS
5	15351.18	50.57	41.09	-9.48	74.00	32.91	PK	Horizontal	PASS
6	17692.35	47.21	42.15	-5.06	74.00	31.85	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

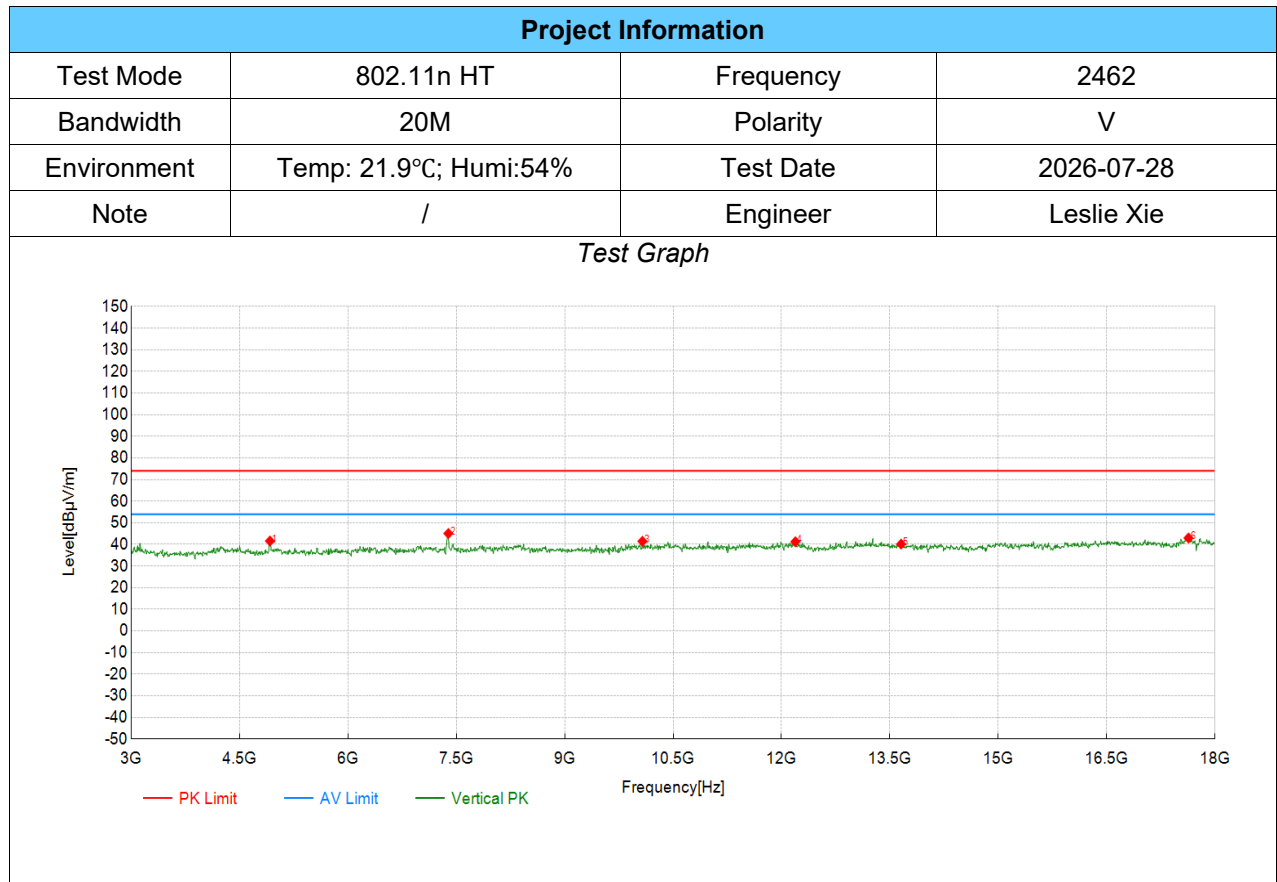

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4920.96	59.52	41.58	-17.94	74.00	32.42	PK	Vertical	PASS
2	7389.69	60.20	45.07	-15.13	74.00	28.93	PK	Vertical	PASS
3	10076.04	52.36	41.46	-10.90	74.00	32.54	PK	Vertical	PASS
4	12192.10	50.97	41.22	-9.75	74.00	32.78	PK	Vertical	PASS
5	13655.33	52.55	40.16	-12.39	74.00	33.84	PK	Vertical	PASS
6	17632.32	48.02	43.00	-5.02	74.00	31.00	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

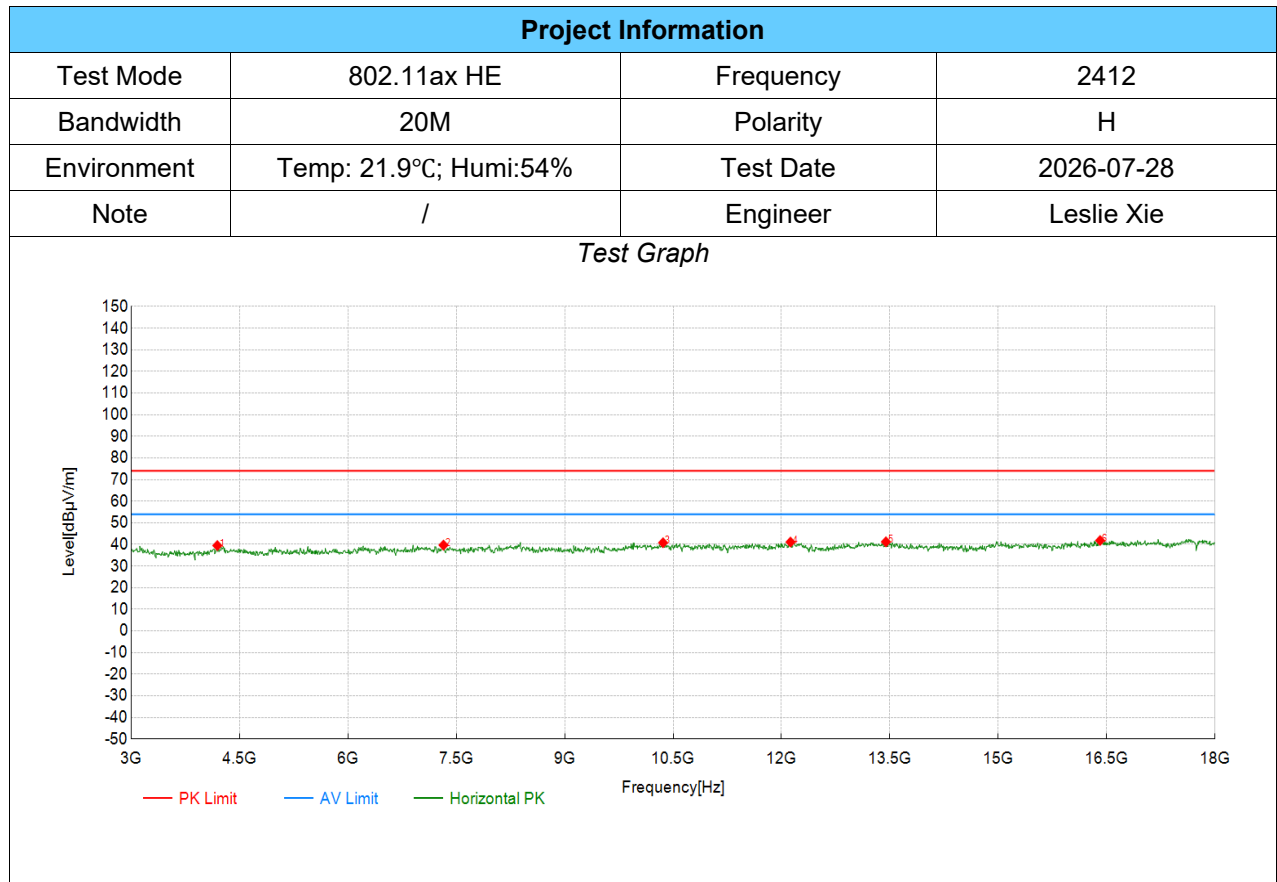

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4193.10	57.06	39.48	-17.58	74.00	34.52	PK	Horizontal	PASS
2	7322.16	54.87	39.69	-15.18	74.00	34.31	PK	Horizontal	PASS
3	10361.18	50.75	40.79	-9.96	74.00	33.21	PK	Horizontal	PASS
4	12124.56	50.79	41.08	-9.71	74.00	32.92	PK	Horizontal	PASS
5	13445.22	52.79	41.20	-11.59	74.00	32.80	PK	Horizontal	PASS
6	16409.20	49.90	41.82	-8.08	74.00	32.18	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

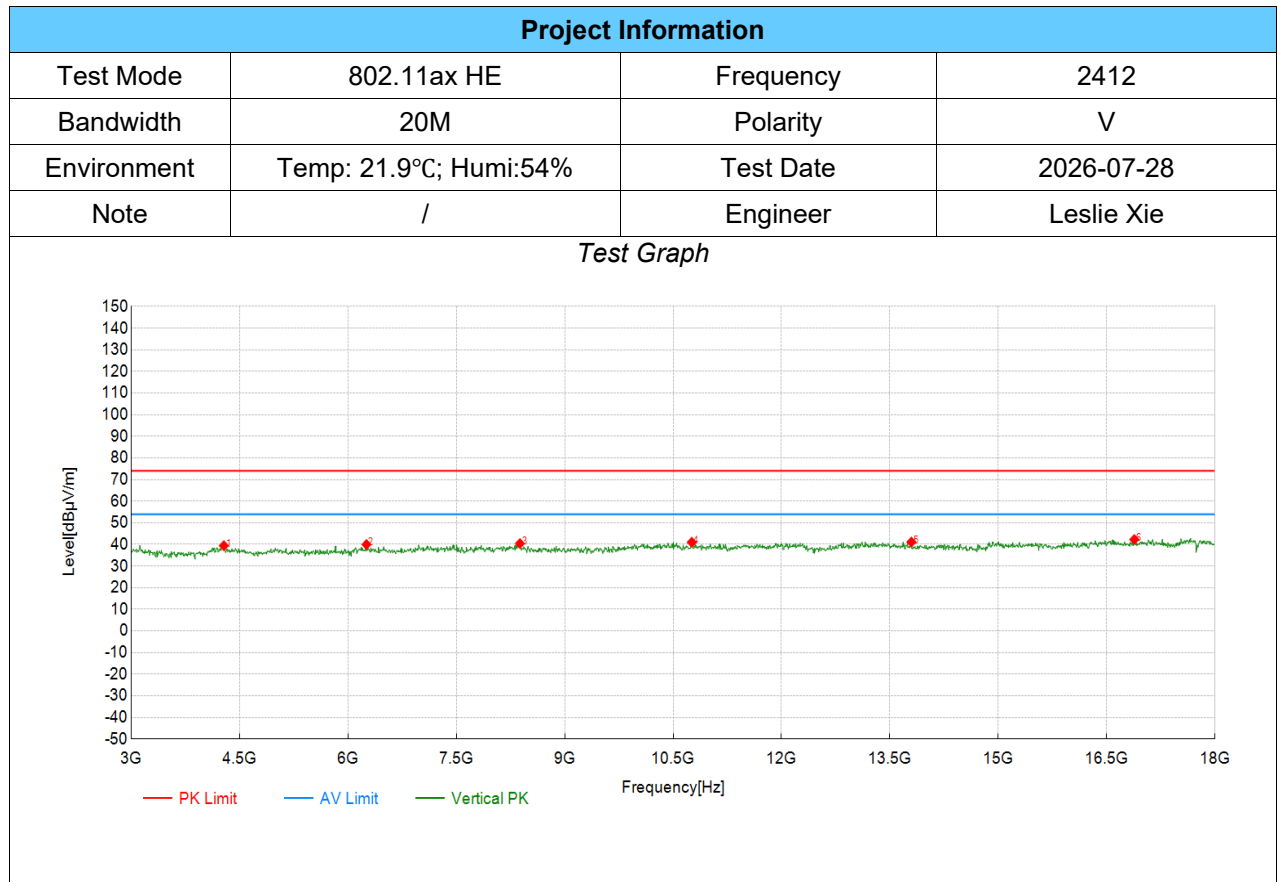

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4283.14	57.12	39.43	-17.69	74.00	34.57	PK	Vertical	PASS
2	6256.63	56.24	39.98	-16.26	74.00	34.02	PK	Vertical	PASS
3	8380.19	53.07	40.42	-12.65	74.00	33.58	PK	Vertical	PASS
4	10758.88	50.19	41.00	-9.19	74.00	33.00	PK	Vertical	PASS
5	13797.90	53.43	41.09	-12.34	74.00	32.91	PK	Vertical	PASS
6	16881.94	49.95	42.29	-7.66	74.00	31.71	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level


TX Radiated Test Result

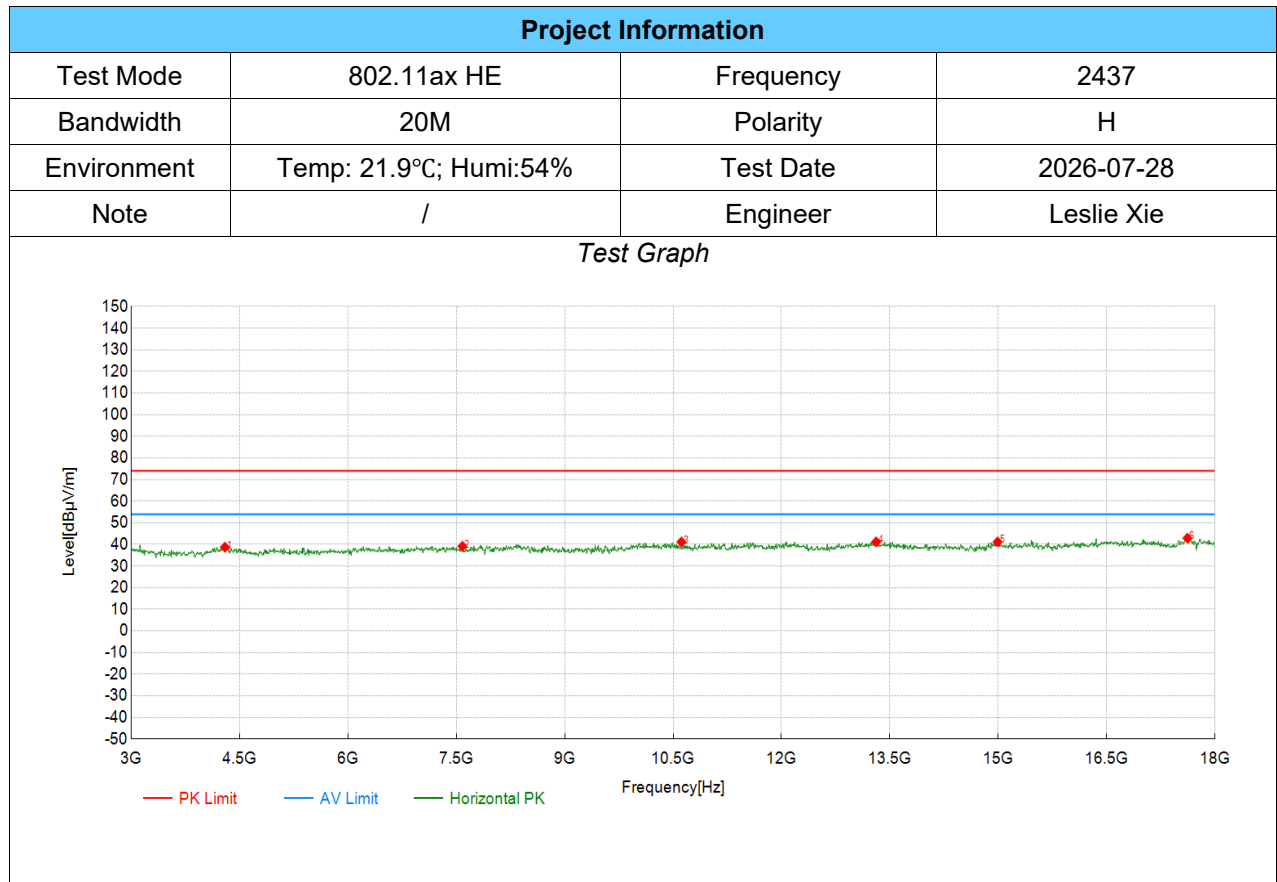

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4298.15	56.46	38.74	-17.72	74.00	35.26	PK	Horizontal	PASS
2	7584.79	54.72	39.12	-15.60	74.00	34.88	PK	Horizontal	PASS
3	10616.31	50.63	41.15	-9.48	74.00	32.85	PK	Horizontal	PASS
4	13310.16	52.30	41.21	-11.09	74.00	32.79	PK	Horizontal	PASS
5	14991.00	50.47	41.19	-9.28	74.00	32.81	PK	Horizontal	PASS
6	17617.31	47.92	42.90	-5.02	74.00	31.10	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

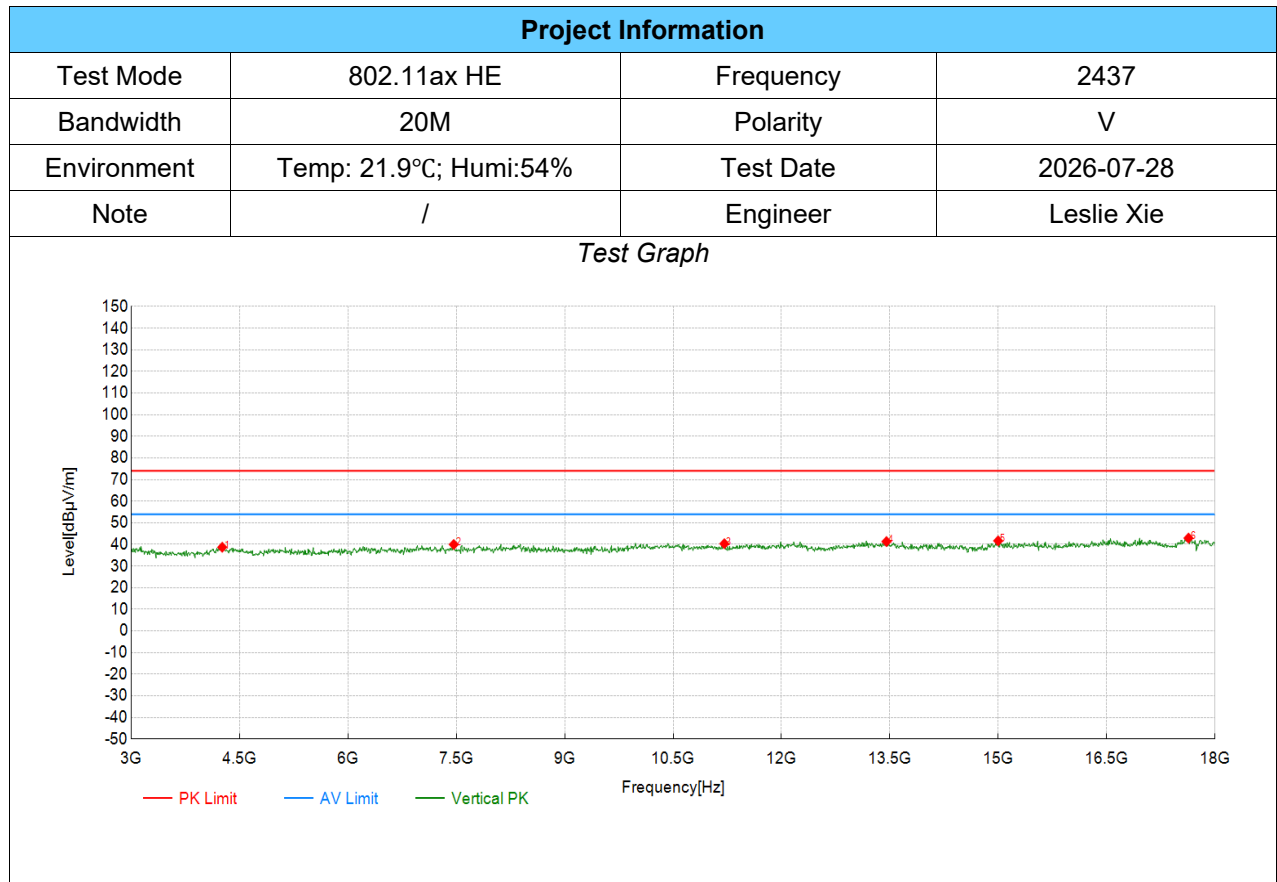

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4260.63	56.35	38.70	-17.65	74.00	35.30	PK	Vertical	PASS
2	7464.73	55.27	39.97	-15.30	74.00	34.03	PK	Vertical	PASS
3	11209.10	49.00	40.36	-8.64	74.00	33.64	PK	Vertical	PASS
4	13452.73	52.96	41.34	-11.62	74.00	32.66	PK	Vertical	PASS
5	14998.50	50.91	41.67	-9.24	74.00	32.33	PK	Vertical	PASS
6	17632.32	47.96	42.94	-5.02	74.00	31.06	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

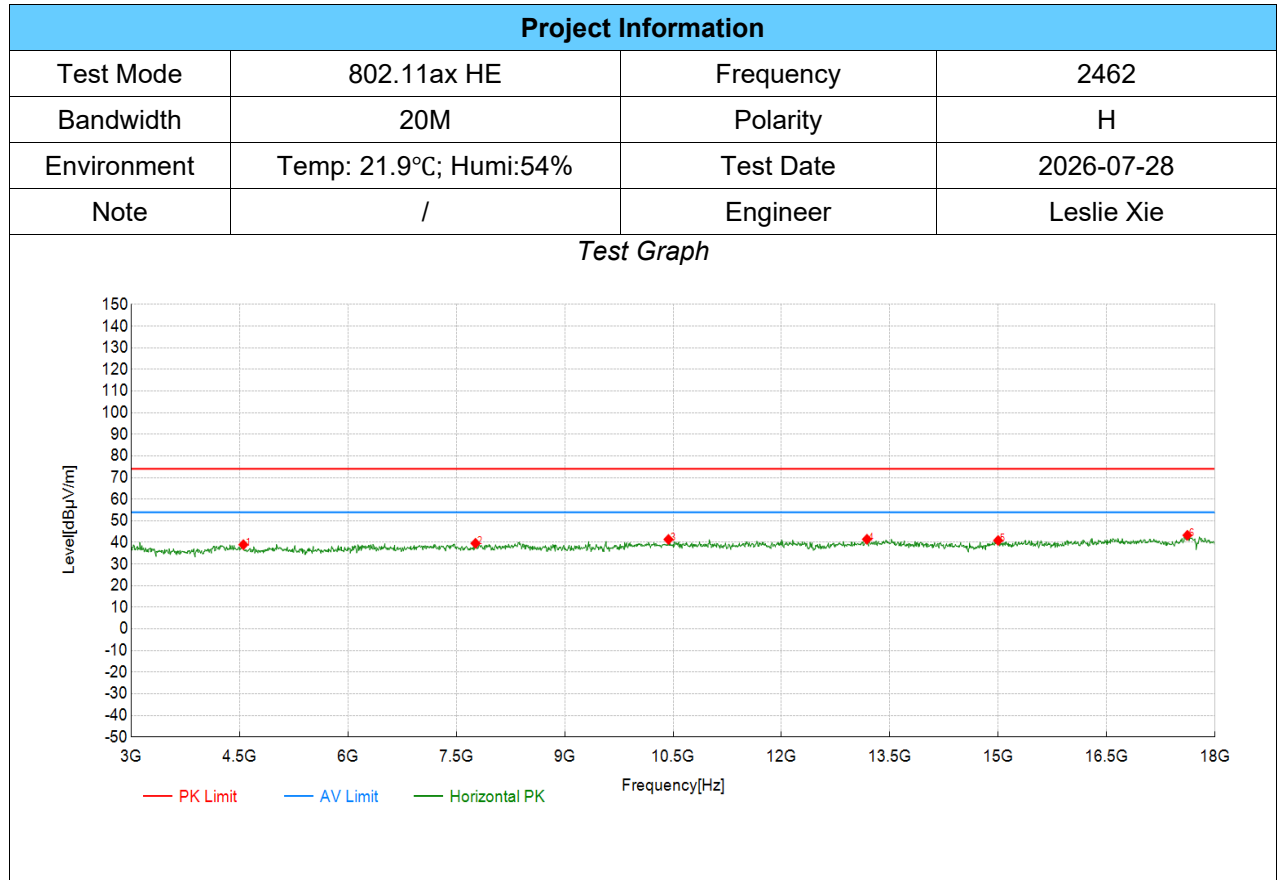

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4553.28	57.19	38.96	-18.23	74.00	35.04	PK	Horizontal	PASS
2	7764.88	54.56	39.58	-14.98	74.00	34.42	PK	Horizontal	PASS
3	10436.22	50.98	41.38	-9.60	74.00	32.62	PK	Horizontal	PASS
4	13182.59	52.36	41.47	-10.89	74.00	32.53	PK	Horizontal	PASS
5	14998.50	50.15	40.91	-9.24	74.00	33.09	PK	Horizontal	PASS
6	17617.31	48.34	43.32	-5.02	74.00	30.68	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

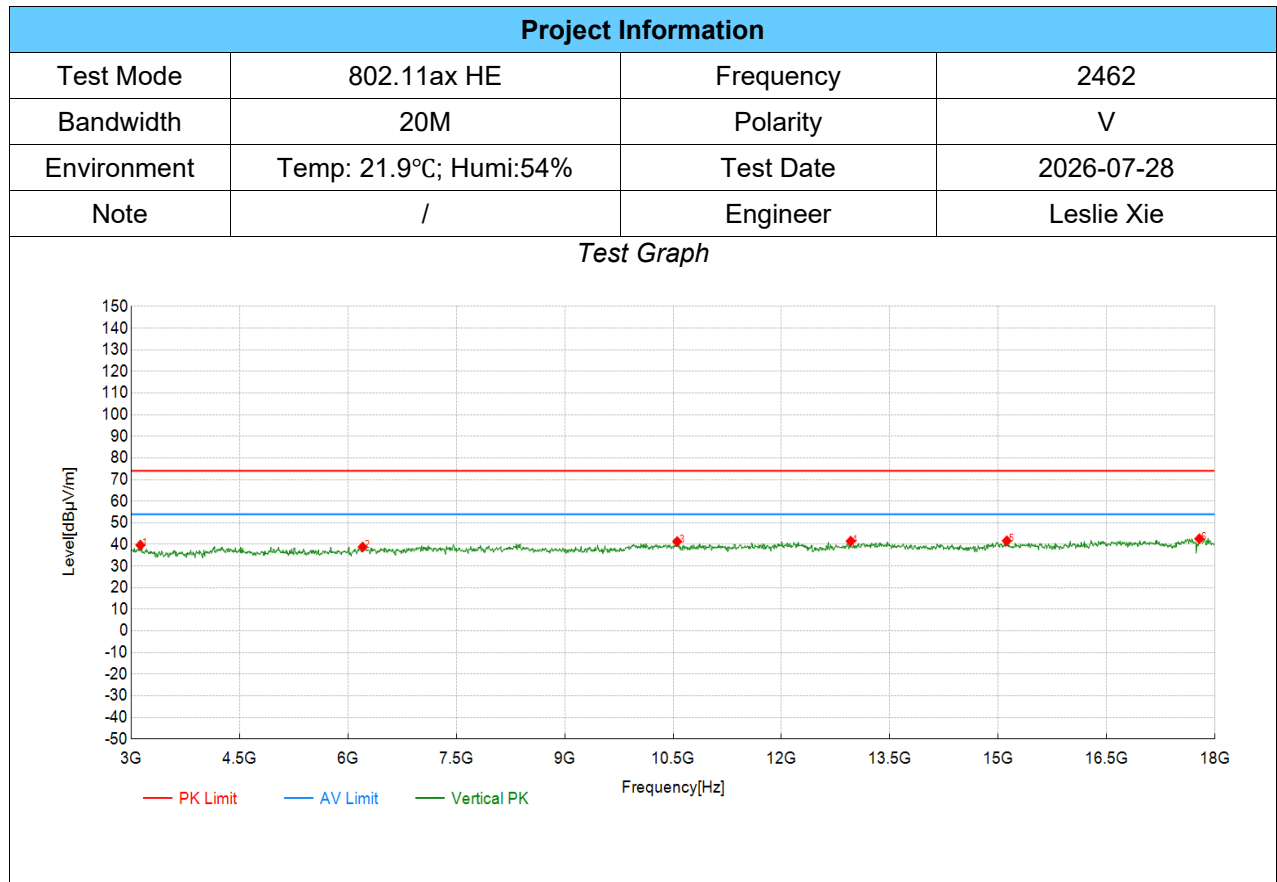


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	3127.56	57.66	39.69	-17.97	74.00	34.31	PK	Vertical	PASS
2	6204.10	55.09	38.84	-16.25	74.00	35.16	PK	Vertical	PASS
3	10556.28	50.88	41.36	-9.52	74.00	32.64	PK	Vertical	PASS
4	12957.48	53.04	41.51	-11.53	74.00	32.49	PK	Vertical	PASS
5	15118.56	51.56	41.66	-9.90	74.00	32.34	PK	Vertical	PASS
6	17782.39	47.73	42.63	-5.10	74.00	31.37	PK	Vertical	PASS

Note: (1) Level = Reading + Factor
 (2) Margin = Limit - Level

Note: All the modes have been tested, only the worst data was recorded in the report.


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 48V

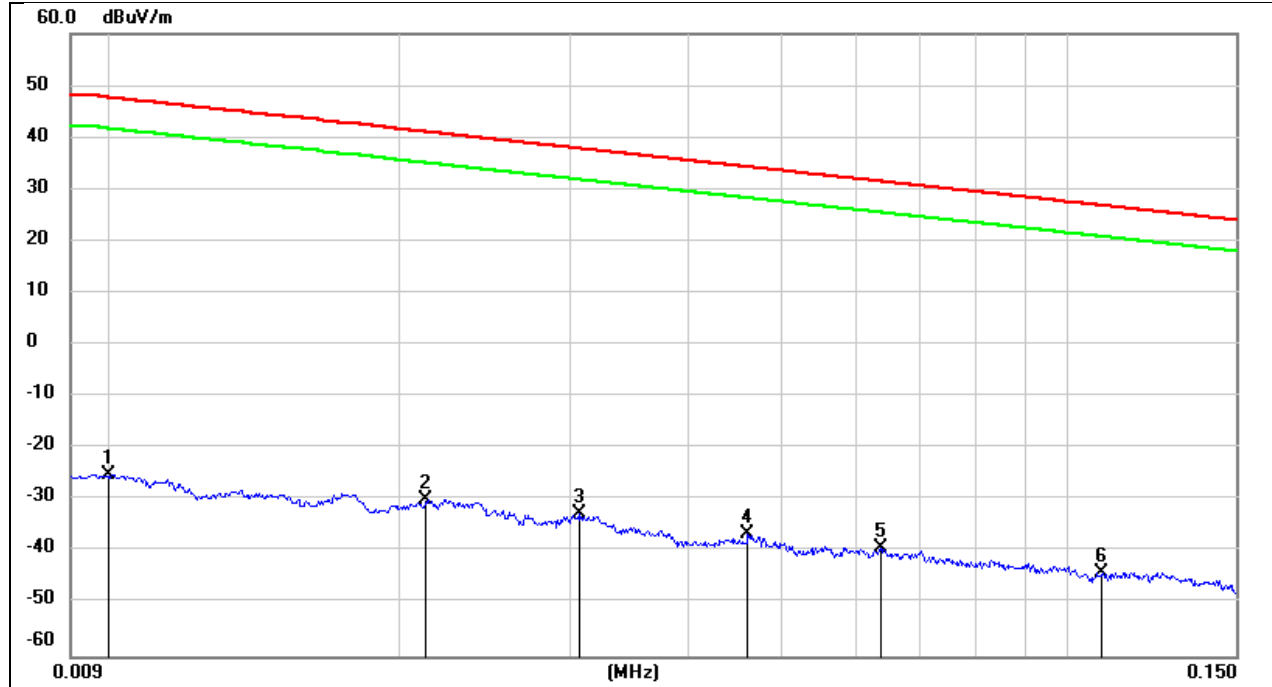


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.60	-72.78	peak
2	0.0212	71.54	-101.35	-29.81	41.07	-70.88	peak
3	0.0307	68.76	-101.39	-32.63	37.86	-70.49	peak
4	0.0461	64.96	-101.46	-36.50	34.33	-70.83	peak
5	0.0636	62.31	-101.54	-39.23	31.53	-70.76	peak
6	0.1087	57.88	-101.78	-43.90	26.88	-70.78	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 48V

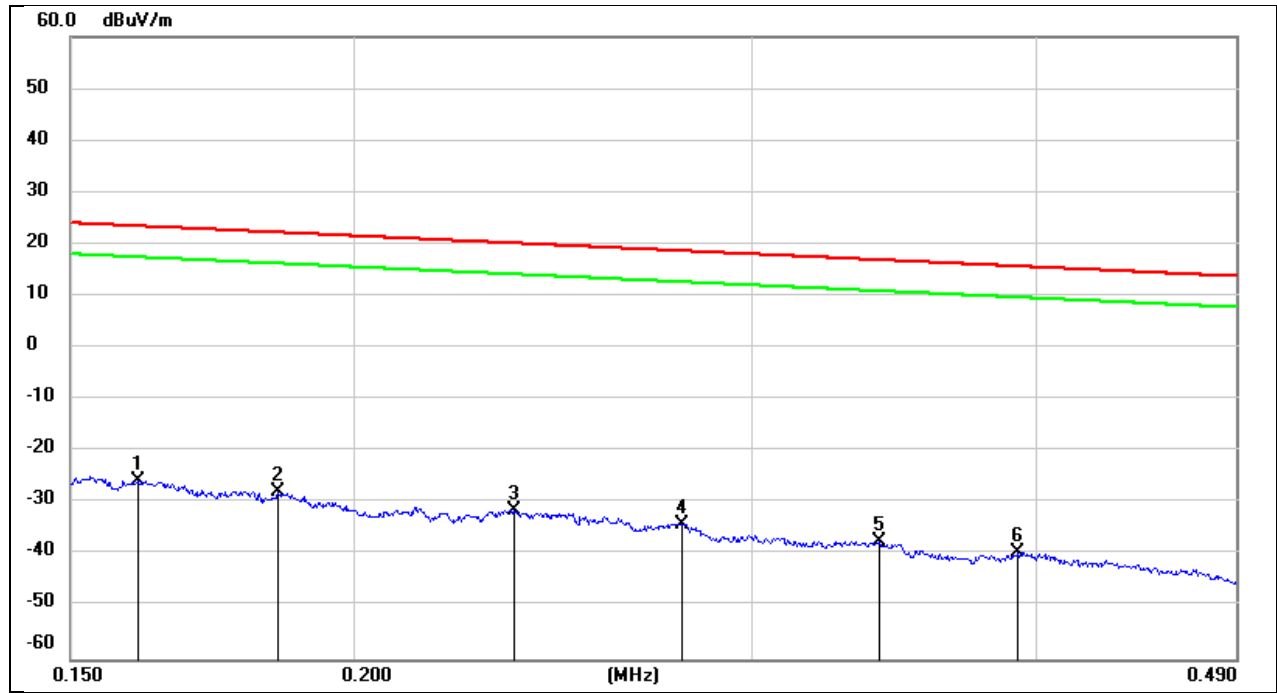

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1607	76.11	-101.65	-25.54	23.48	-49.02	peak
2	0.1852	73.97	-101.70	-27.73	22.25	-49.98	peak
3	0.2353	70.50	-101.78	-31.28	20.17	-51.45	peak
4	0.2795	67.92	-101.83	-33.91	18.67	-52.58	peak
5	0.3412	64.53	-101.90	-37.37	16.94	-54.31	peak
6	0.3930	62.55	-101.96	-39.41	15.71	-55.12	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 48V

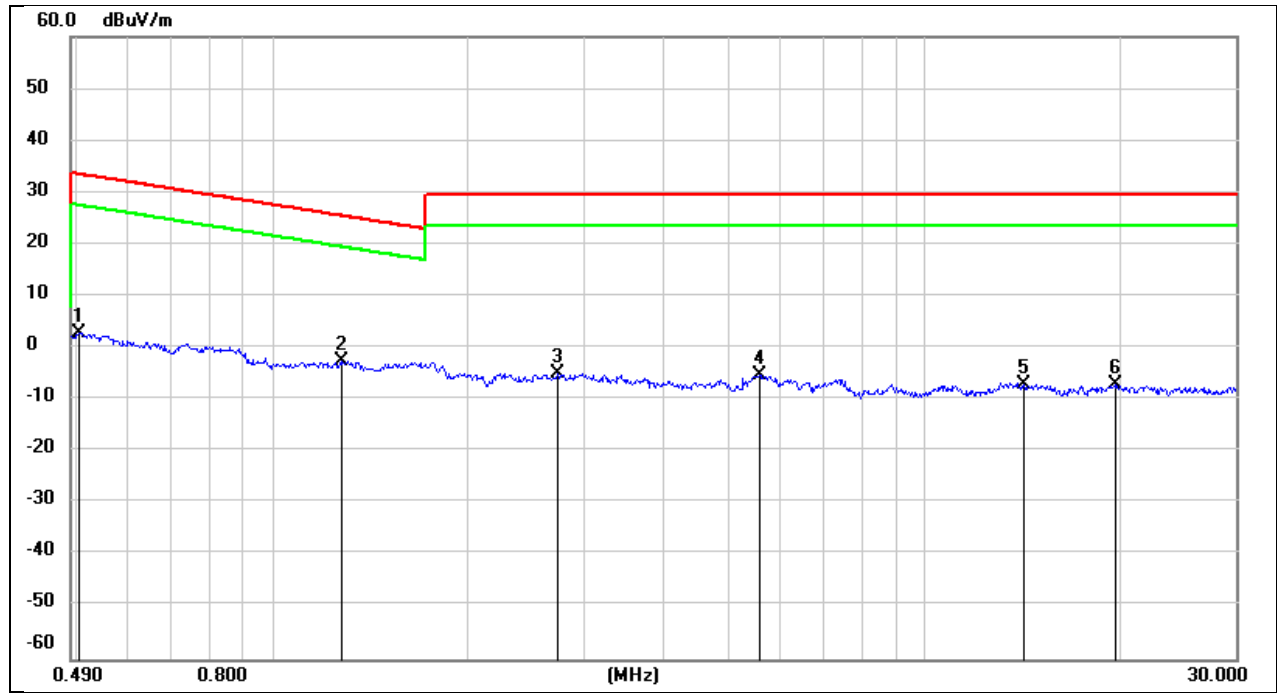


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	64.93	-62.07	2.86	33.56	-30.70	peak
2	1.2721	59.74	-62.15	-2.41	25.52	-27.93	peak
3	2.7360	56.64	-61.64	-5.00	29.54	-34.54	peak
4	5.5952	56.05	-61.41	-5.36	29.54	-34.90	peak
5	14.2416	53.87	-60.98	-7.11	29.54	-36.65	peak
6	19.5823	53.72	-60.85	-7.13	29.54	-36.67	peak

Note: All the modes have been tested, only the worst data was recorded in the report.


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 48V

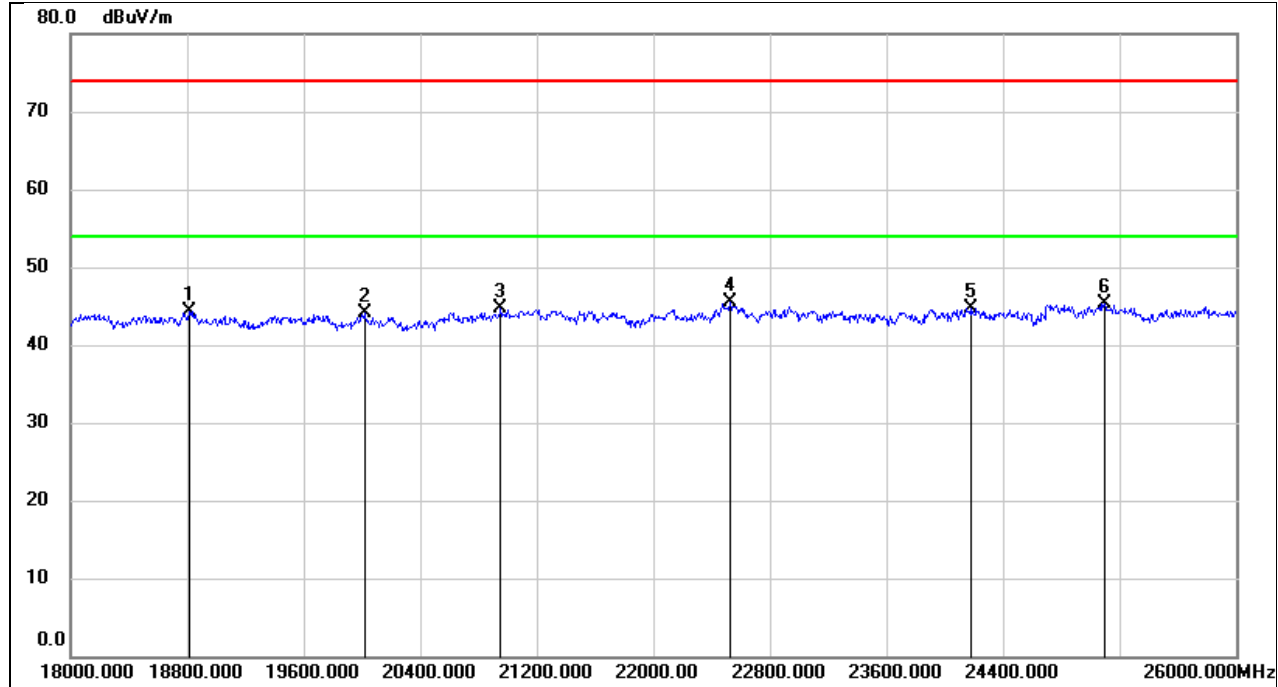

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	49.71	-5.38	44.33	74.00	-29.67	peak
2	20016.000	49.56	-5.47	44.09	74.00	-29.91	peak
3	20952.000	49.54	-4.92	44.62	74.00	-29.38	peak
4	22528.000	49.28	-3.86	45.42	74.00	-28.58	peak
5	24184.000	47.43	-2.80	44.63	74.00	-29.37	peak
6	25096.000	47.15	-1.93	45.22	74.00	-28.78	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 48V

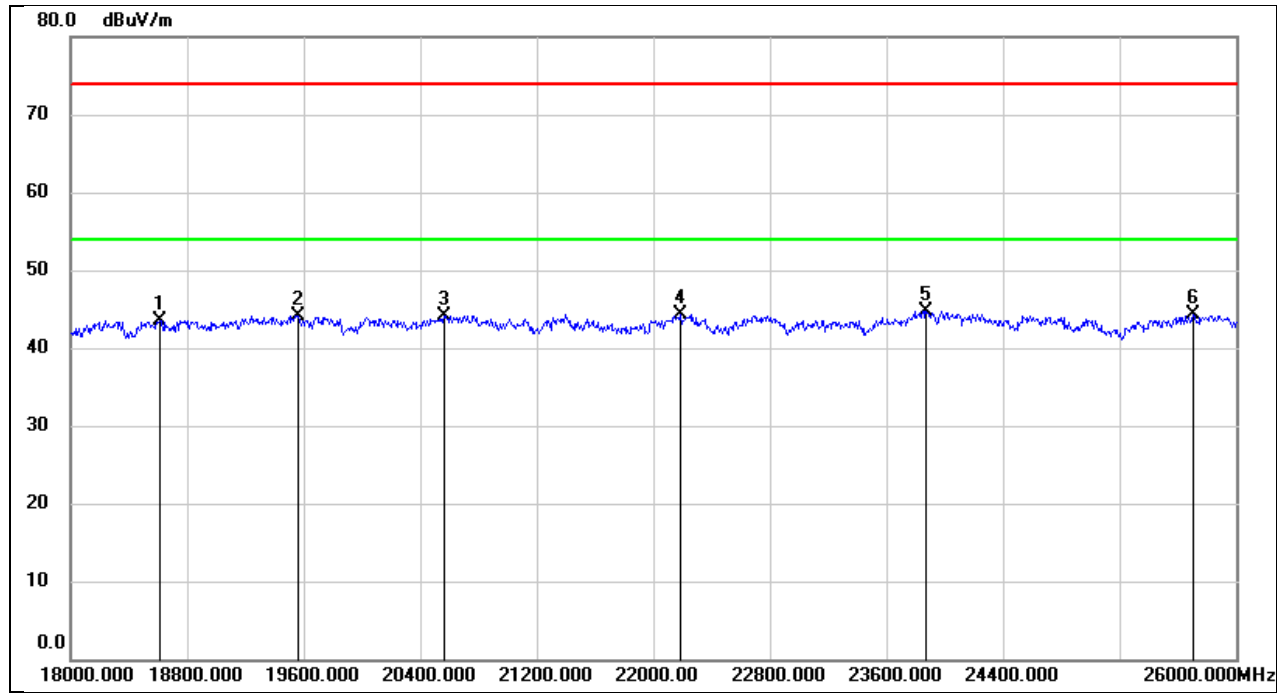


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	48.89	-5.34	43.55	74.00	-30.45	peak
2	19560.000	49.64	-5.48	44.16	74.00	-29.84	peak
3	20568.000	49.38	-5.28	44.10	74.00	-29.90	peak
4	22184.000	48.53	-4.29	44.24	74.00	-29.76	peak
5	23872.000	47.74	-2.98	44.76	74.00	-29.24	peak
6	25704.000	45.04	-0.83	44.21	74.00	-29.79	peak

Note: All the modes have been tested, only the worst data was recorded in the report.


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 48V

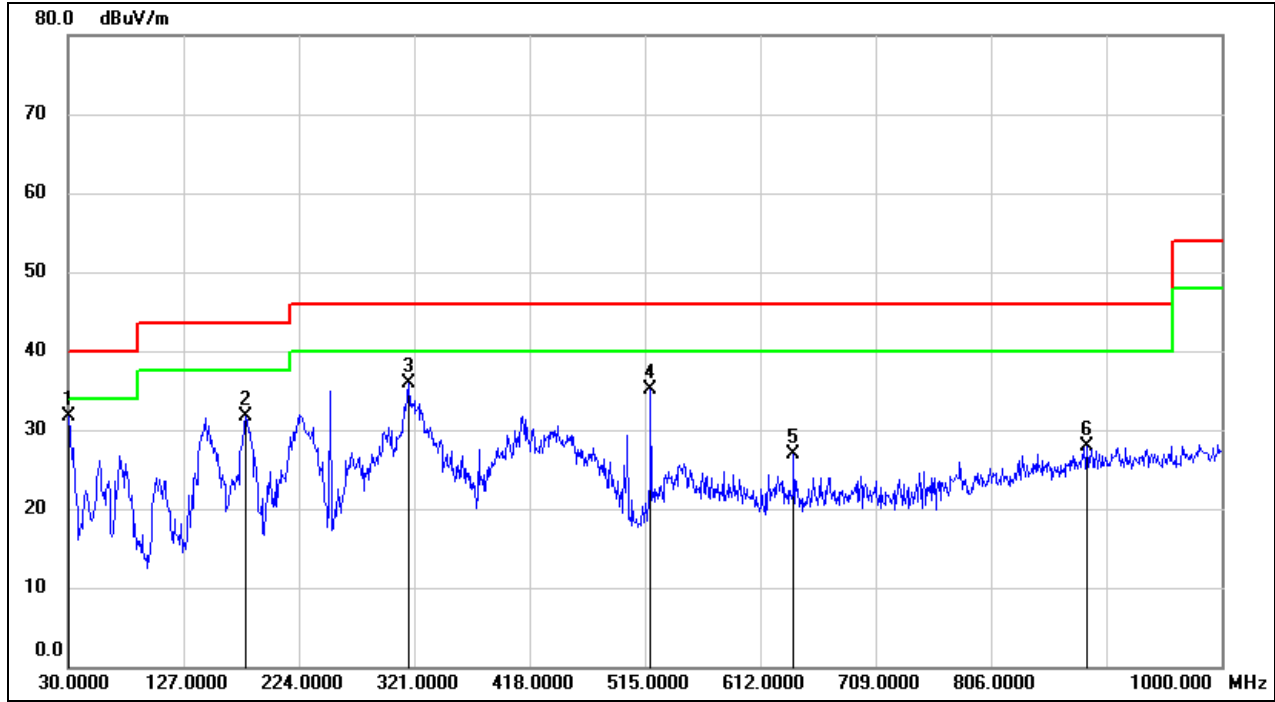

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	46.28	-14.58	31.70	40.00	-8.30	peak
2	179.3800	43.61	-11.93	31.68	43.50	-11.82	peak
3	316.1500	46.61	-10.69	35.92	46.00	-10.08	peak
4	519.8500	42.18	-7.06	35.12	46.00	-10.88	peak
5	640.1300	32.42	-5.44	26.98	46.00	-19.02	peak
6	886.5100	28.73	-0.73	28.00	46.00	-18.00	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 48V

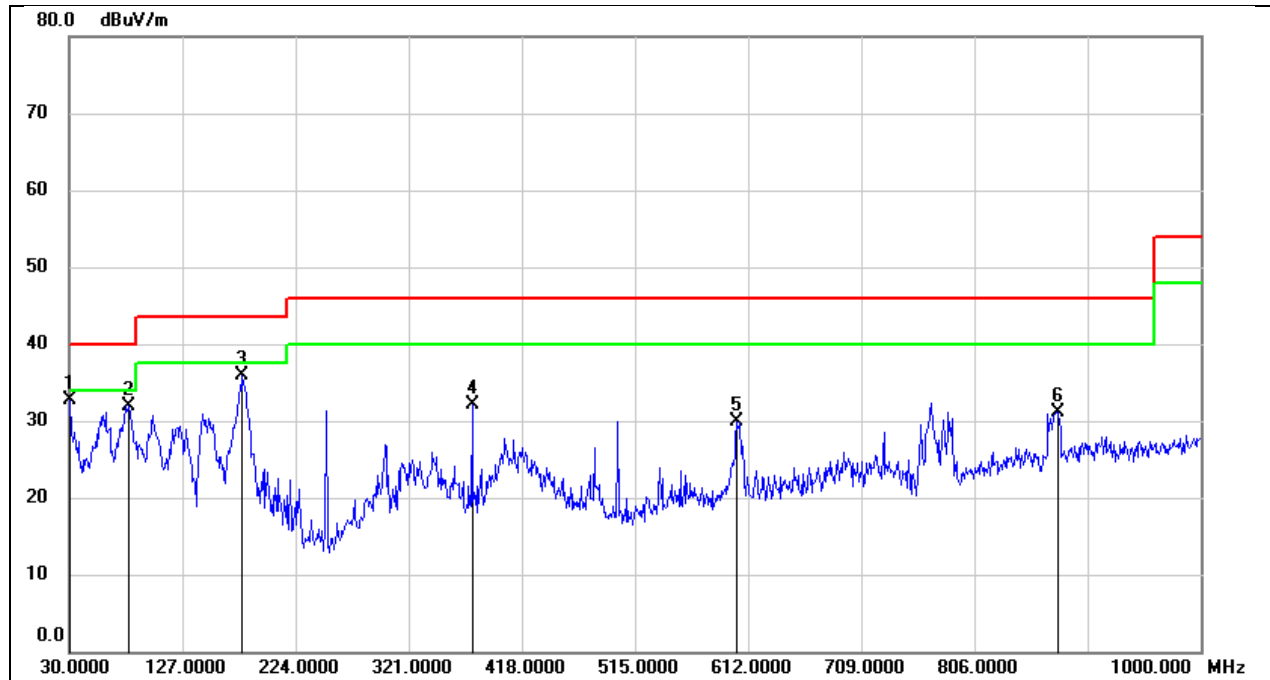


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	47.38	-14.58	32.80	40.00	-7.20	peak
2	81.4100	48.11	-16.21	31.90	40.00	-8.10	peak
3	178.4100	47.85	-11.96	35.89	43.50	-7.61	peak
4	375.3200	41.54	-9.50	32.04	46.00	-13.96	peak
5	602.3000	35.33	-5.45	29.88	46.00	-16.12	peak
6	877.7800	32.02	-0.86	31.16	46.00	-14.84	peak

Note: All the modes have been tested, only the worst data was recorded in the report.


8.7. SIMULTANEOUS TRANSMISSION OF HALOW & WIFI & LTE

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Horizontal	Test Voltage:	DC 48V

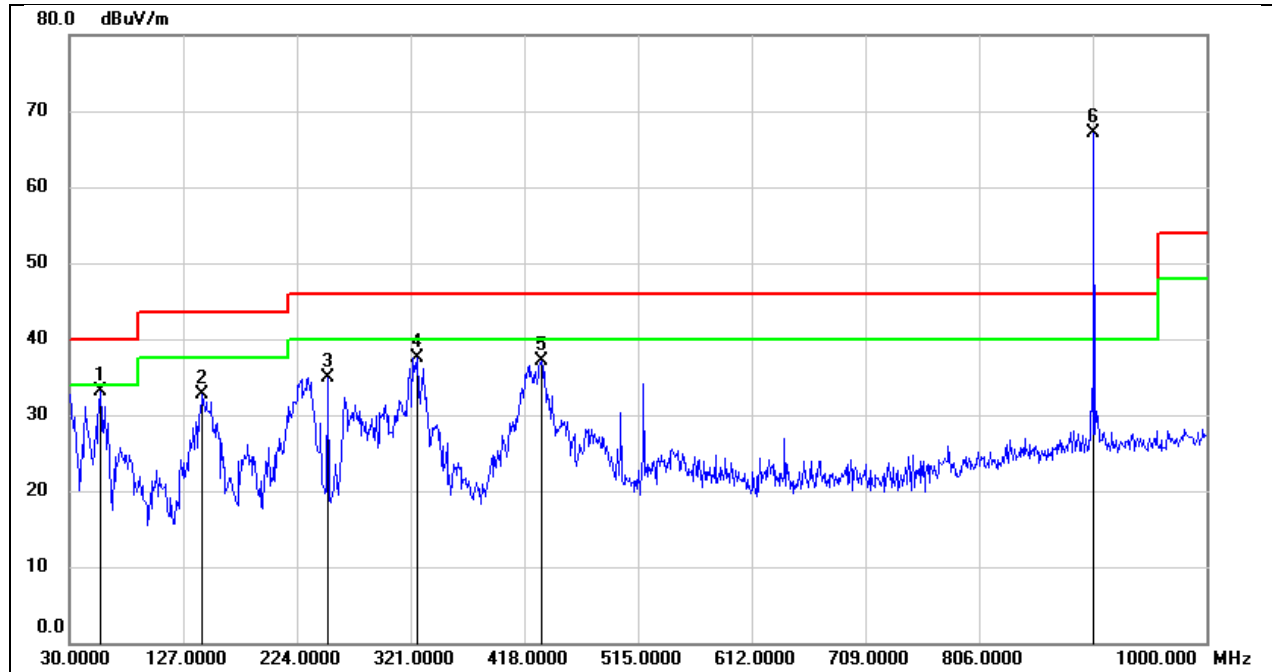


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	48.22	-15.18	33.04	40.00	-6.96	peak
2	143.4900	46.68	-13.90	32.78	43.50	-10.72	peak
3	250.1900	49.46	-14.60	34.86	46.00	-11.14	peak
4	326.8200	47.85	-10.29	37.56	46.00	-8.44	peak
5	432.5500	45.53	-8.46	37.07	46.00	-8.93	peak
6	903.2000	67.61	-0.53	67.08	/	/	Fundamental

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Vertical	Test Voltage:	DC 48V

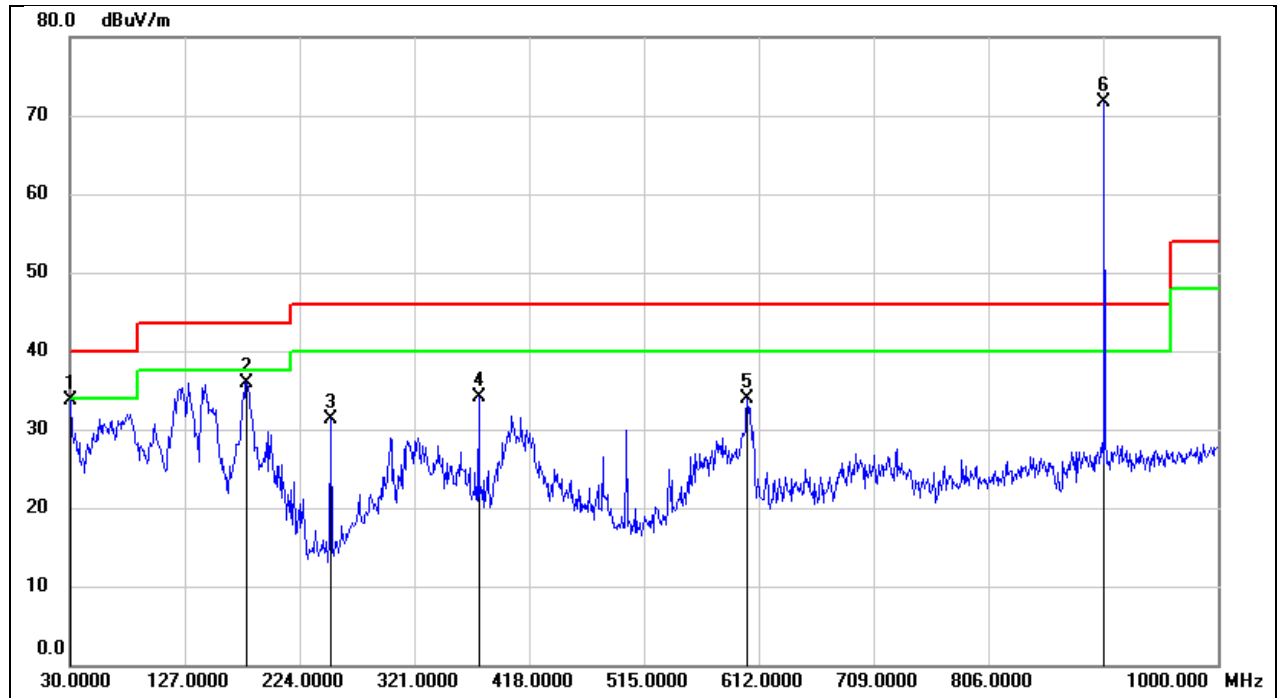


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	48.38	-14.58	33.80	40.00	-6.20	peak
2	179.3800	47.91	-11.93	35.98	43.50	-7.52	peak
3	250.1900	45.84	-14.60	31.24	46.00	-14.76	peak
4	375.3200	43.54	-9.50	34.04	46.00	-11.96	peak
5	602.3000	39.33	-5.45	33.88	46.00	-12.12	peak
6	903.2000	72.14	-0.53	71.61	/	/	Fundamental

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Horizontal	Test Voltage:	DC 48V

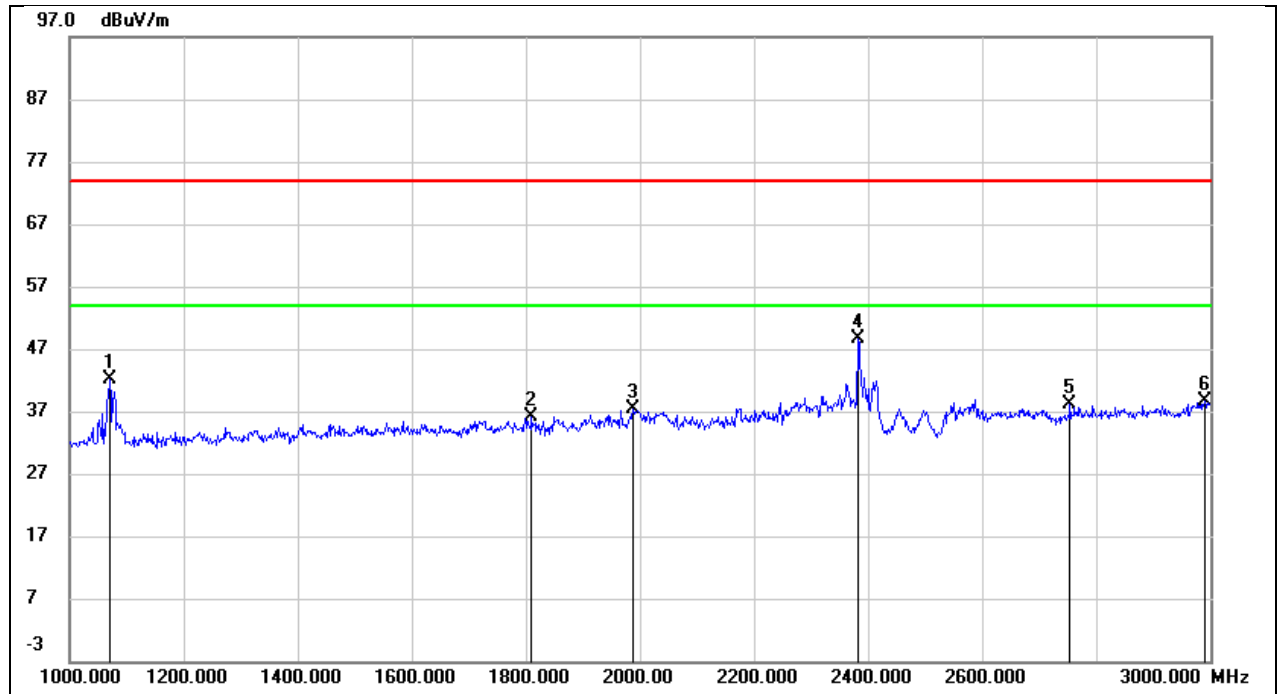


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1070.000	55.67	-13.58	42.09	74.00	-31.91	peak
2	1810.000	46.61	-10.55	36.06	74.00	-37.94	peak
3	1988.000	47.17	-9.76	37.41	74.00	-36.59	peak
4	2382.000	57.17	-8.57	48.60	74.00	-25.40	peak
5	2754.000	45.13	-6.97	38.16	74.00	-35.84	peak
6	2990.000	44.79	-6.08	38.71	74.00	-35.29	peak

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Vertical	Test Voltage:	DC 48V

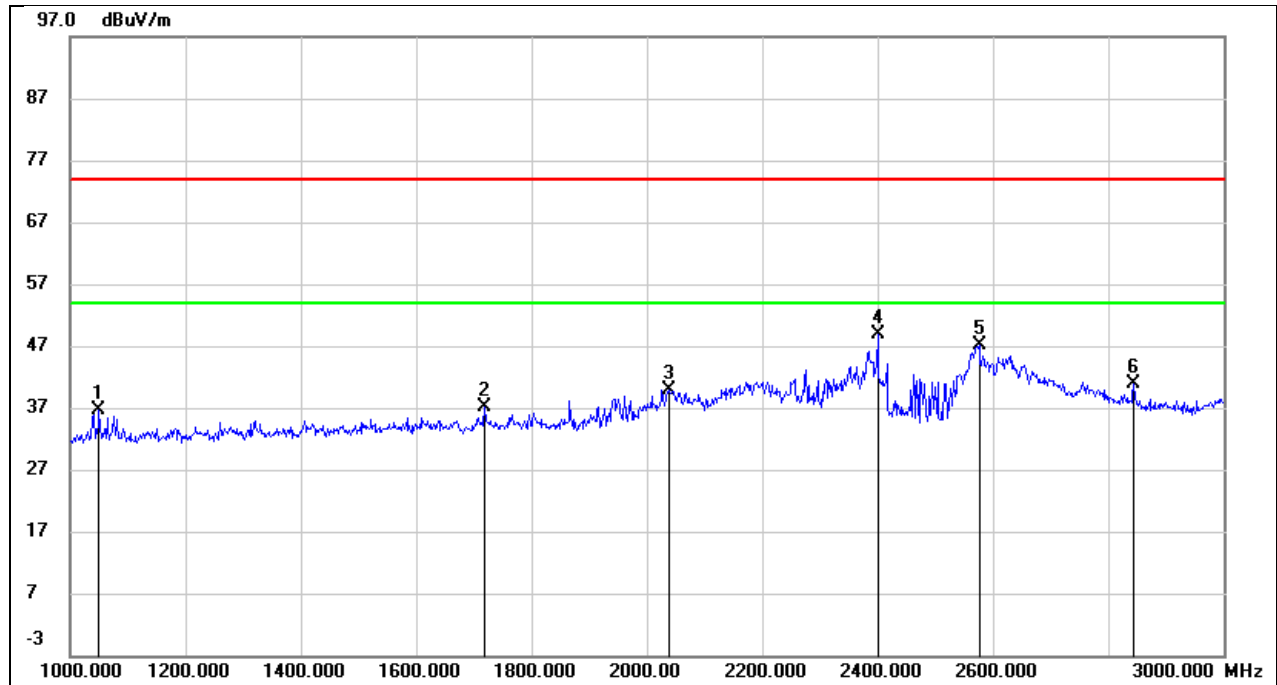


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1050.000	50.43	-13.68	36.75	74.00	-37.25	peak
2	1718.000	47.97	-10.89	37.08	74.00	-36.92	peak
3	2038.000	49.52	-9.71	39.81	74.00	-34.19	peak
4	2400.000	57.29	-8.46	48.83	74.00	-25.17	peak
5	2576.000	54.87	-7.63	47.24	74.00	-26.76	peak
6	2844.000	47.42	-6.64	40.78	74.00	-33.22	peak

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Horizontal	Test Voltage:	DC 48V

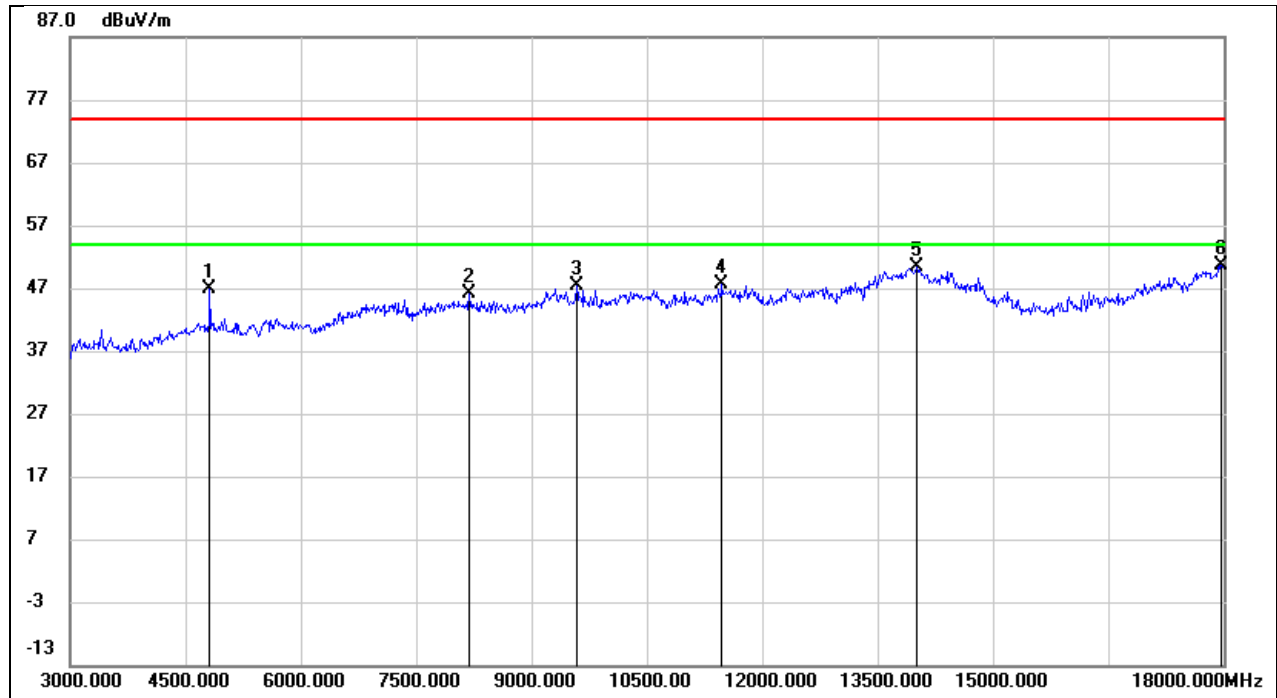

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.78	0.22	47.00	74.00	-27.00	peak
2	8190.000	38.10	8.06	46.16	74.00	-27.84	peak
3	9585.000	36.11	11.30	47.41	74.00	-26.59	peak
4	11475.000	30.93	16.74	47.67	74.00	-26.33	peak
5	14010.000	26.50	24.00	50.50	74.00	-23.50	peak
6	17970.000	22.86	27.79	50.65	74.00	-23.35	peak

Test Mode:	Halow+802.11n + LTE Band41 5M	Frequency(MHz):	903+2462 + 2498.5
Polarity:	Vertical	Test Voltage:	DC 48V

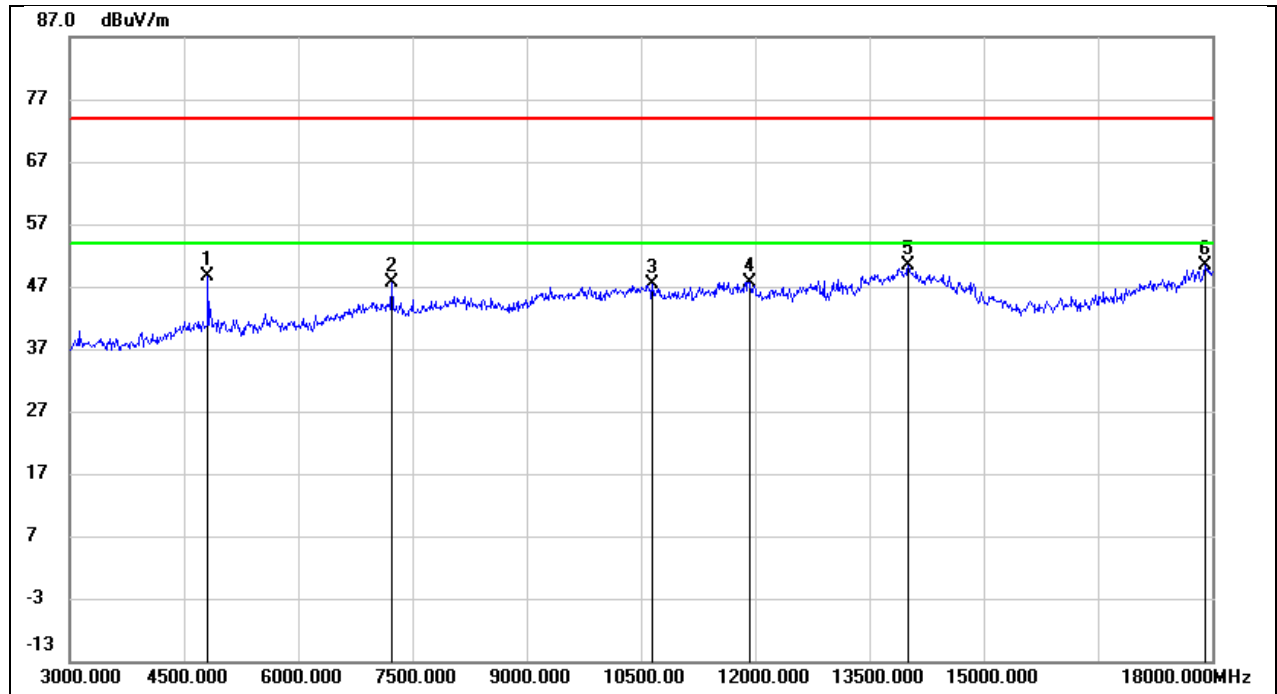

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	48.31	0.22	48.53	74.00	-25.47	peak
2	7230.000	40.94	6.72	47.66	74.00	-26.34	peak
3	10650.000	32.96	14.44	47.40	74.00	-26.60	peak
4	11925.000	29.64	18.07	47.71	74.00	-26.29	peak
5	14010.000	26.38	24.00	50.38	74.00	-23.62	peak
6	17910.000	22.88	27.41	50.29	74.00	-23.71	peak

Note: All the modes have been tested, only the worst data was recorded in the report.

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to FCC 47 CFR §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

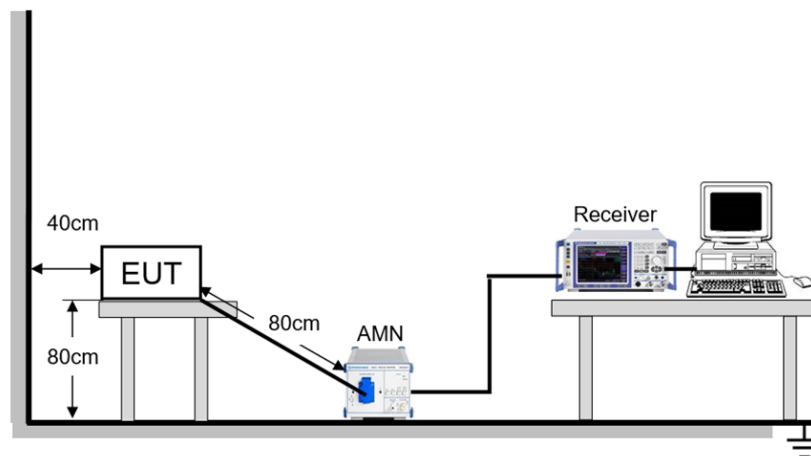

TEST ENVIRONMENT


Temperature	24.5°C	Relative Humidity	59%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	Aug 4, 2026	Test By	Mick Zhang
-----------	-------------	---------	------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

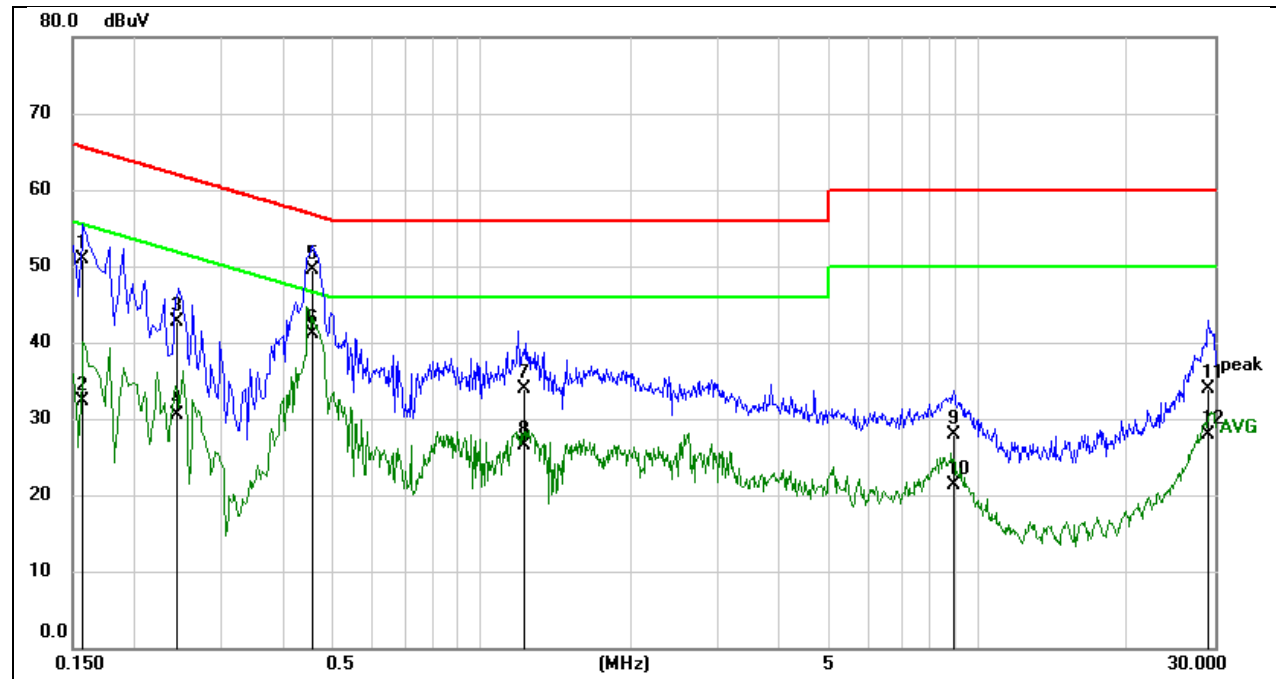


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	41.01	9.81	50.82	65.57	-14.75	QP
2	0.1580	22.44	9.81	32.25	55.57	-23.32	AVG
3	0.2429	32.96	9.65	42.61	62.00	-19.39	QP
4	0.2429	20.93	9.65	30.58	52.00	-21.42	AVG
5	0.4553	39.70	9.72	49.42	56.78	-7.36	QP
6	0.4553	31.33	9.72	41.05	46.78	-5.73	AVG
7	1.2221	24.25	9.73	33.98	56.00	-22.02	QP
8	1.2221	16.78	9.73	26.51	46.00	-19.49	AVG
9	8.8901	18.13	9.70	27.83	60.00	-32.17	QP
10	8.8901	11.65	9.70	21.35	50.00	-28.65	AVG
11	29.1294	24.32	9.66	33.98	60.00	-26.02	QP
12	29.1294	18.31	9.66	27.97	50.00	-22.03	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

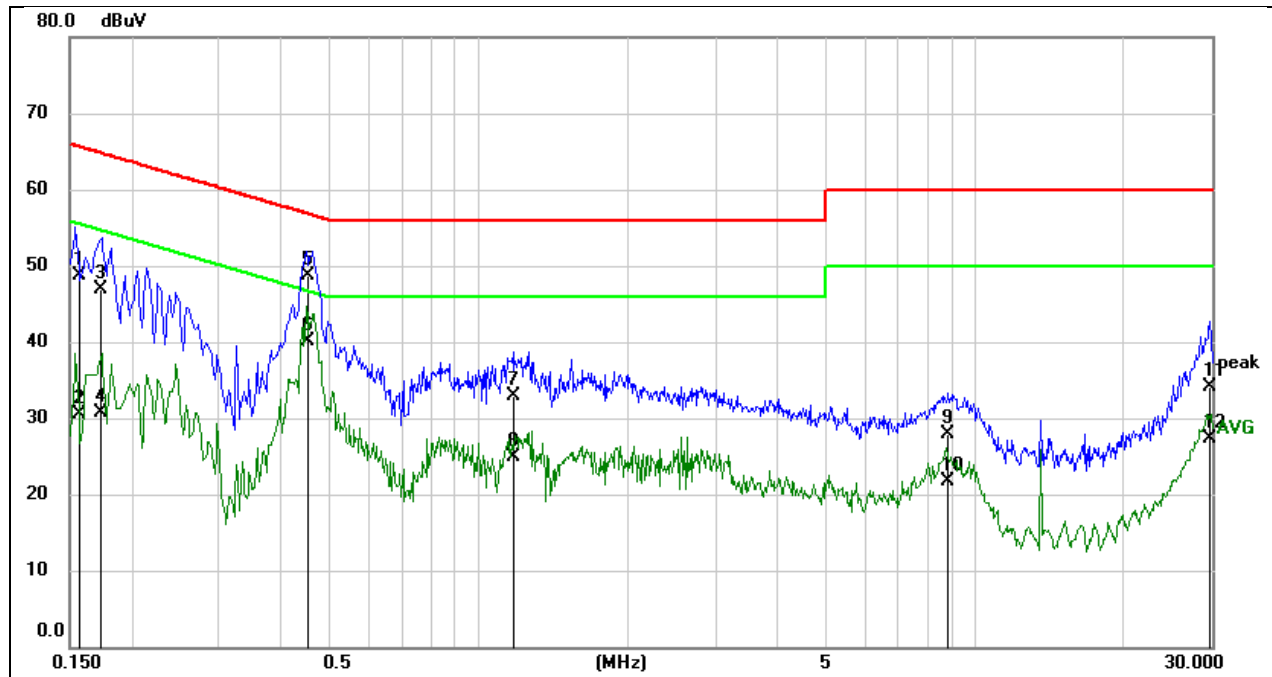

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1575	39.14	9.54	48.68	65.59	-16.91	QP
2	0.1575	20.96	9.54	30.50	55.59	-25.09	AVG
3	0.1727	37.44	9.54	46.98	64.83	-17.85	QP
4	0.1727	21.16	9.54	30.70	54.83	-24.13	AVG
5	0.4521	39.16	9.62	48.78	56.84	-8.06	QP
6	0.4521	30.55	9.62	40.17	46.84	-6.67	AVG
7	1.1777	23.36	9.53	32.89	56.00	-23.11	QP
8	1.1777	15.32	9.53	24.85	46.00	-21.15	AVG
9	8.8645	18.06	9.75	27.81	60.00	-32.19	QP
10	8.8645	11.98	9.75	21.73	50.00	-28.27	AVG
11	29.7132	24.56	9.55	34.11	60.00	-25.89	QP
12	29.7132	17.83	9.55	27.38	50.00	-22.62	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA


11.1. APPENDIX A: DTS BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant2	2412	8.16	2407.92	2416.08	≥ 0.5	PASS
		2437	8.16	2432.92	2441.08	≥ 0.5	PASS
		2462	8.16	2457.92	2466.08	≥ 0.5	PASS
11G	Ant2	2412	16.32	2403.76	2420.08	≥ 0.5	PASS
		2437	16.44	2428.76	2445.20	≥ 0.5	PASS
		2462	16.28	2453.88	2470.16	≥ 0.5	PASS
11N20MIMO	Ant2	2412	17.64	2403.16	2420.80	≥ 0.5	PASS
		2437	17.56	2428.20	2445.76	≥ 0.5	PASS
		2462	17.56	2453.16	2470.72	≥ 0.5	PASS
11N40MIMO	Ant2	2422	36.08	2403.92	2440.00	≥ 0.5	PASS
		2437	36.08	2418.92	2455.00	≥ 0.5	PASS
		2452	35.44	2434.40	2469.84	≥ 0.5	PASS
11AX20MIMO	Ant2	2412	17.84	2403.04	2420.88	≥ 0.5	PASS
		2437	17.76	2428.12	2445.88	≥ 0.5	PASS
		2462	17.80	2453.08	2470.88	≥ 0.5	PASS
11AX40MIMO	Ant2	2422	36.48	2403.76	2440.24	≥ 0.5	PASS
		2437	36.56	2418.76	2455.32	≥ 0.5	PASS
		2452	36.48	2433.76	2470.24	≥ 0.5	PASS


Note: All the modes have been tested, only the worst data was recorded in the report.

11.1.2. Test Graphs

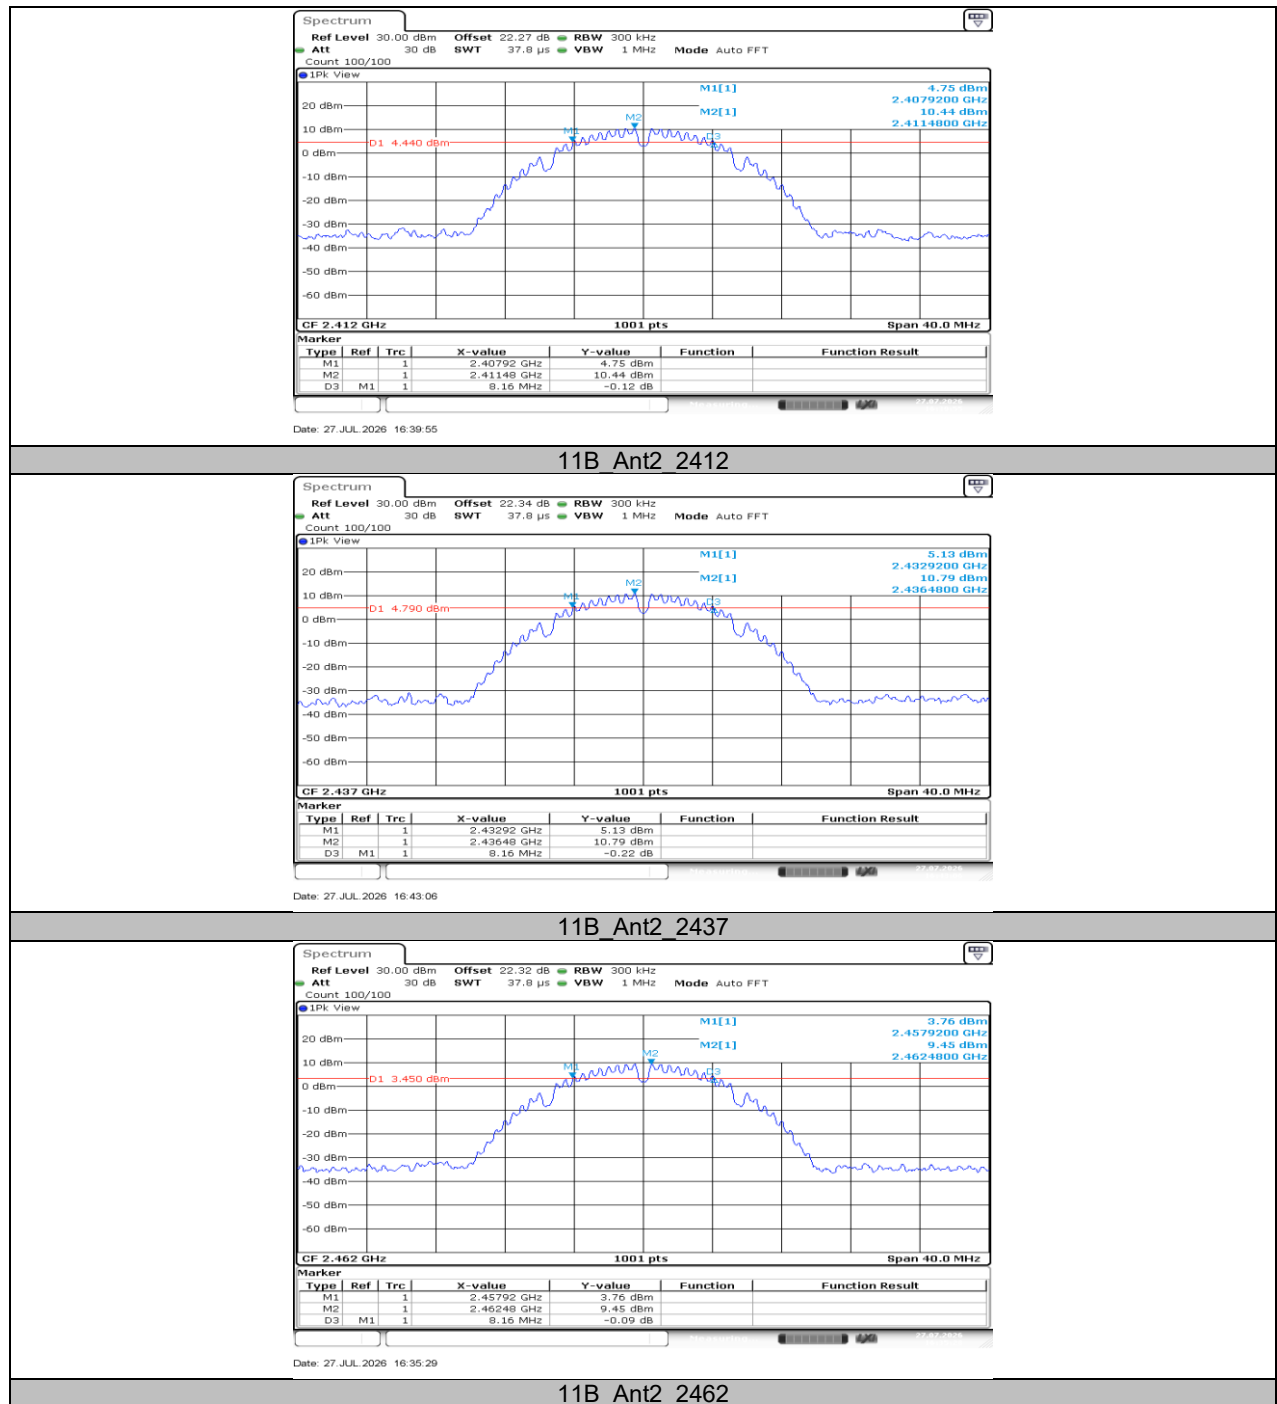


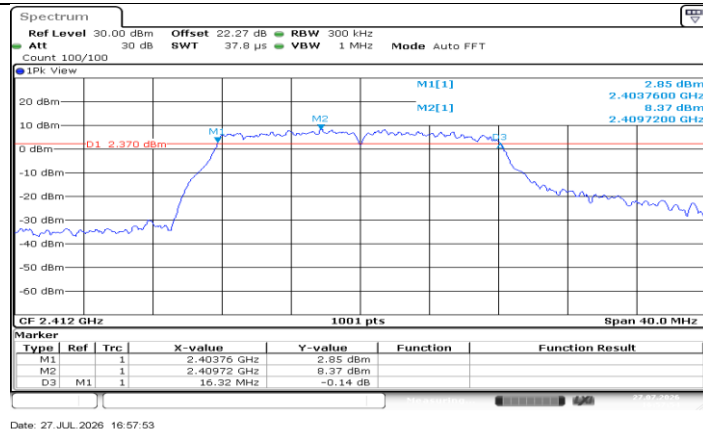


11G_Ant2_2412

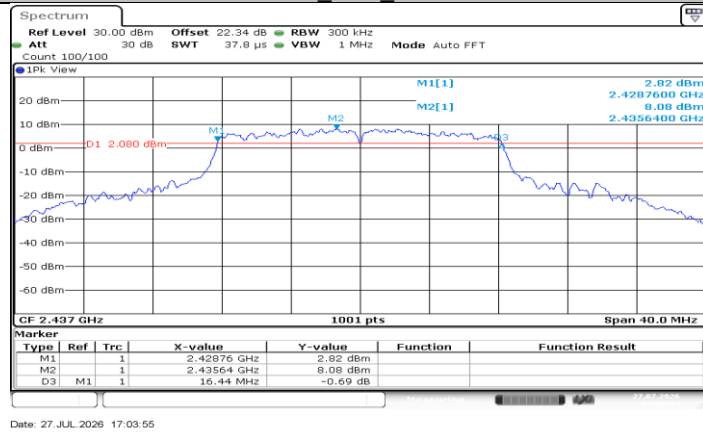


11G_Ant2_2437

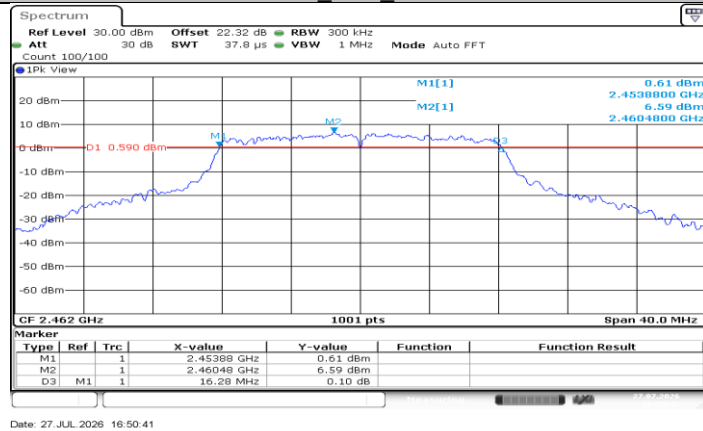


11G_Ant2_2462

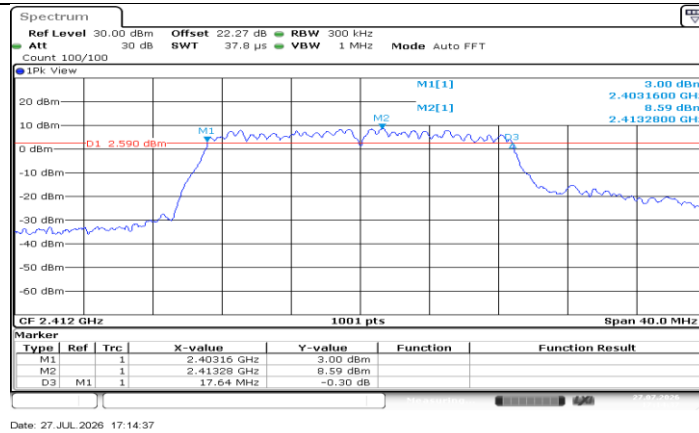


11N20MIMO_Ant2_2412

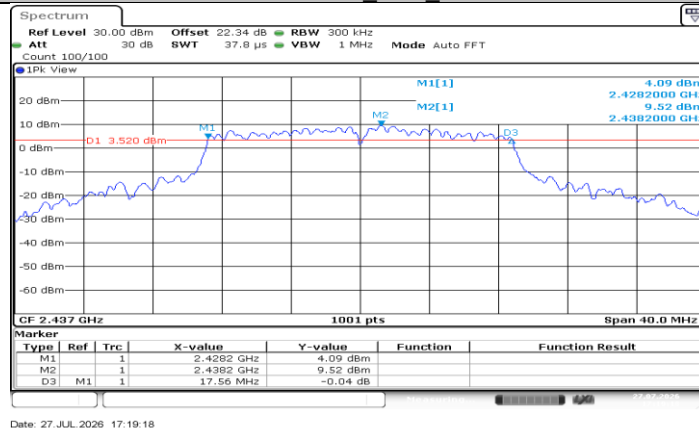


11N20MIMO_Ant2_2437

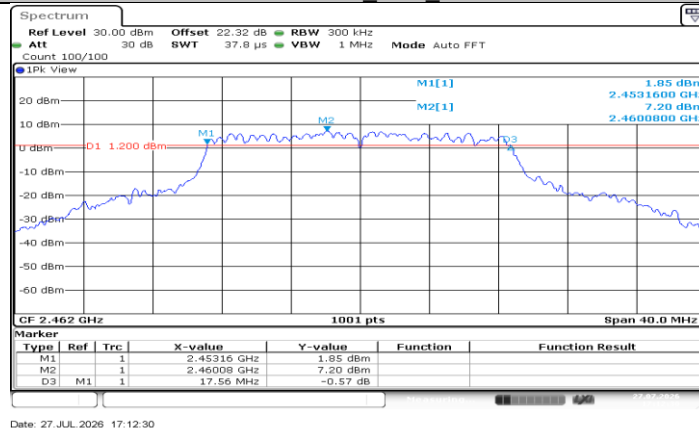


11N20MIMO_Ant2_2462

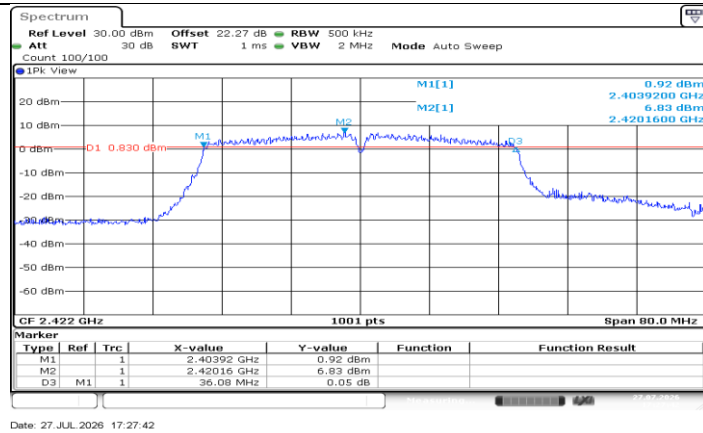


11N40MIMO_Ant2_2422

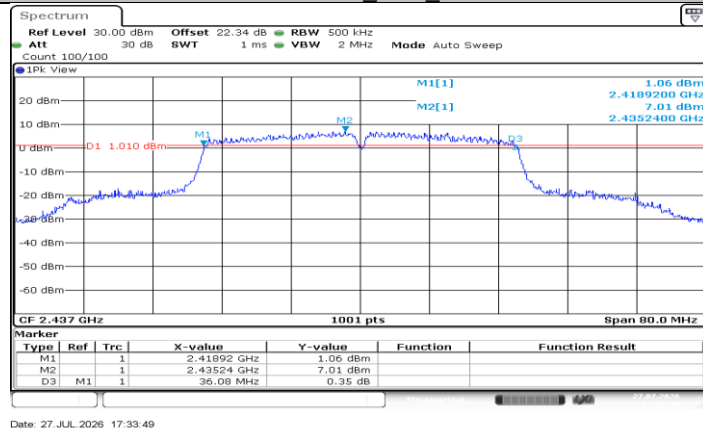


11N40MIMO_Ant2_2437

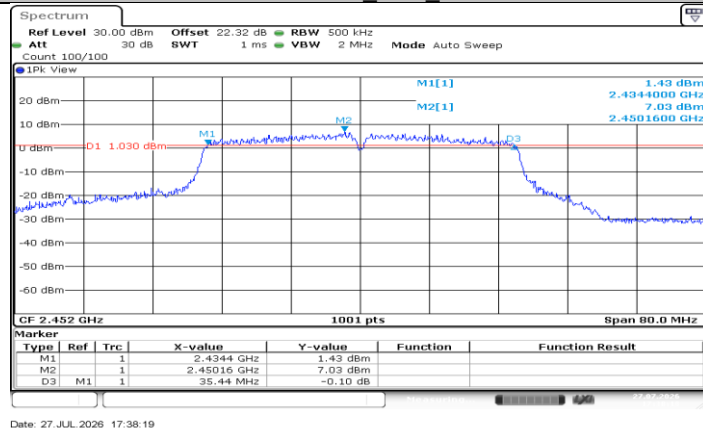


11N40MIMO_Ant2_2452

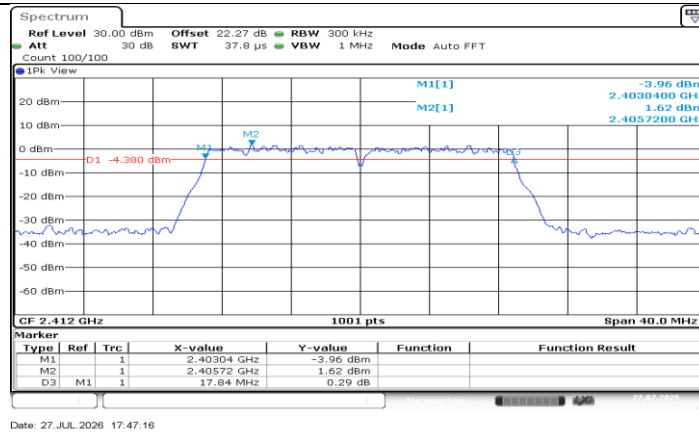


11AX20MIMO_Ant2_2412

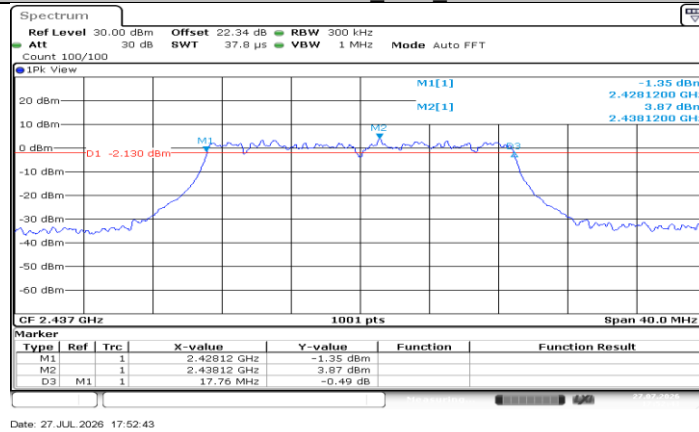


11AX20MIMO_Ant2_2437

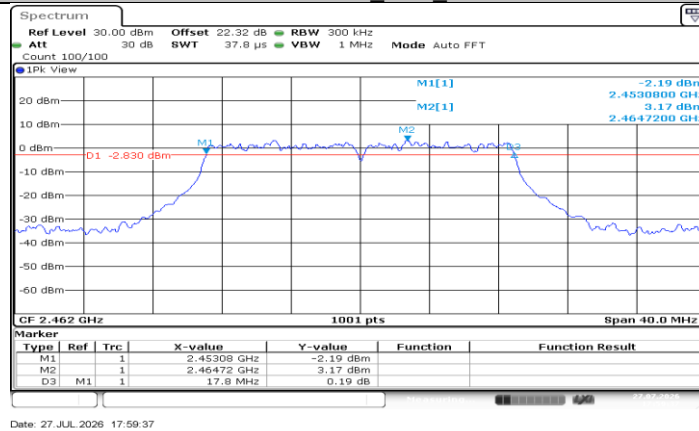


11AX20MIMO_Ant2_2462

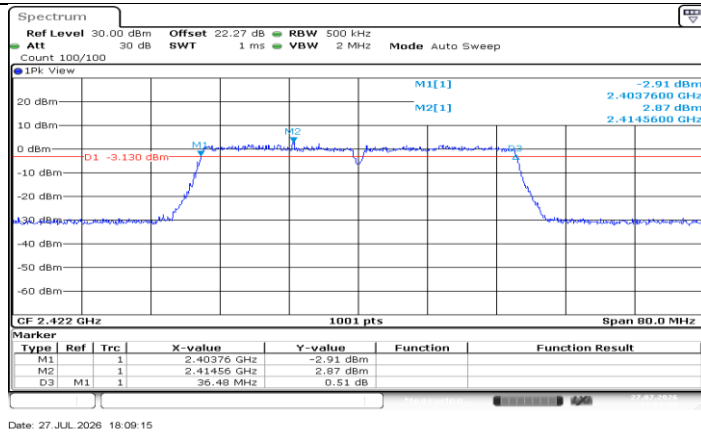

11AX40MIMO_Ant2_2422

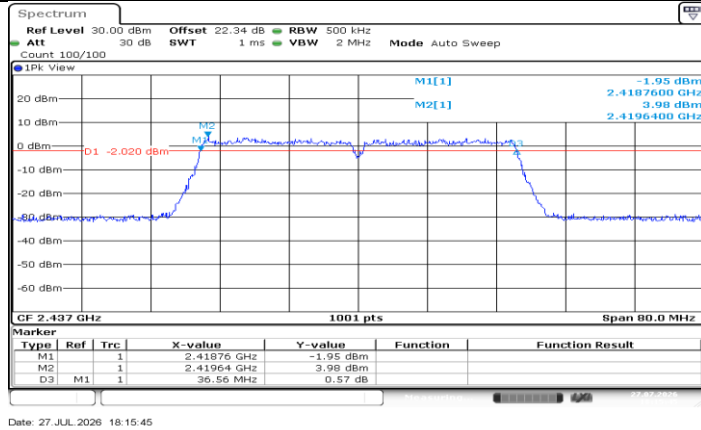

11AX40MIMO_Ant2_2437

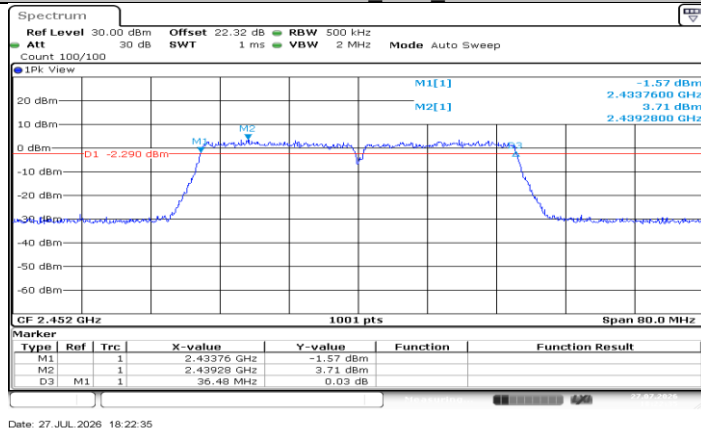

11AX40MIMO_Ant2_2452


11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant2	2412	12.827	2405.6064	2418.4336	PASS
		2437	12.787	2430.6064	2443.3936	PASS
		2462	12.827	2455.6064	2468.4336	PASS
11G	Ant2	2412	17.702	2403.2488	2420.9510	PASS
		2437	17.702	2428.1289	2445.8312	PASS
		2462	17.702	2453.1289	2470.8312	PASS
11N20MIMO	Ant2	2412	18.182	2403.0090	2421.1908	PASS
		2437	18.342	2427.8492	2446.1908	PASS
		2462	18.342	2452.8092	2471.1508	PASS
11N40MIMO	Ant2	2422	36.843	2403.6983	2440.5415	PASS
		2437	37.083	2418.4585	2455.5415	PASS
		2452	36.923	2433.4585	2470.3816	PASS
11AX20MIMO	Ant2	2412	18.182	2402.9291	2421.1109	PASS
		2437	18.262	2427.8891	2446.1508	PASS
		2462	18.262	2452.8891	2471.1508	PASS
11AX40MIMO	Ant2	2422	37.003	2403.5385	2440.5415	PASS
		2437	36.923	2418.5385	2455.4615	PASS
		2452	37.003	2433.5385	2470.5415	PASS


Note: All the modes have been tested, only the worst data was recorded in the report.

11.2.2. Test Graphs

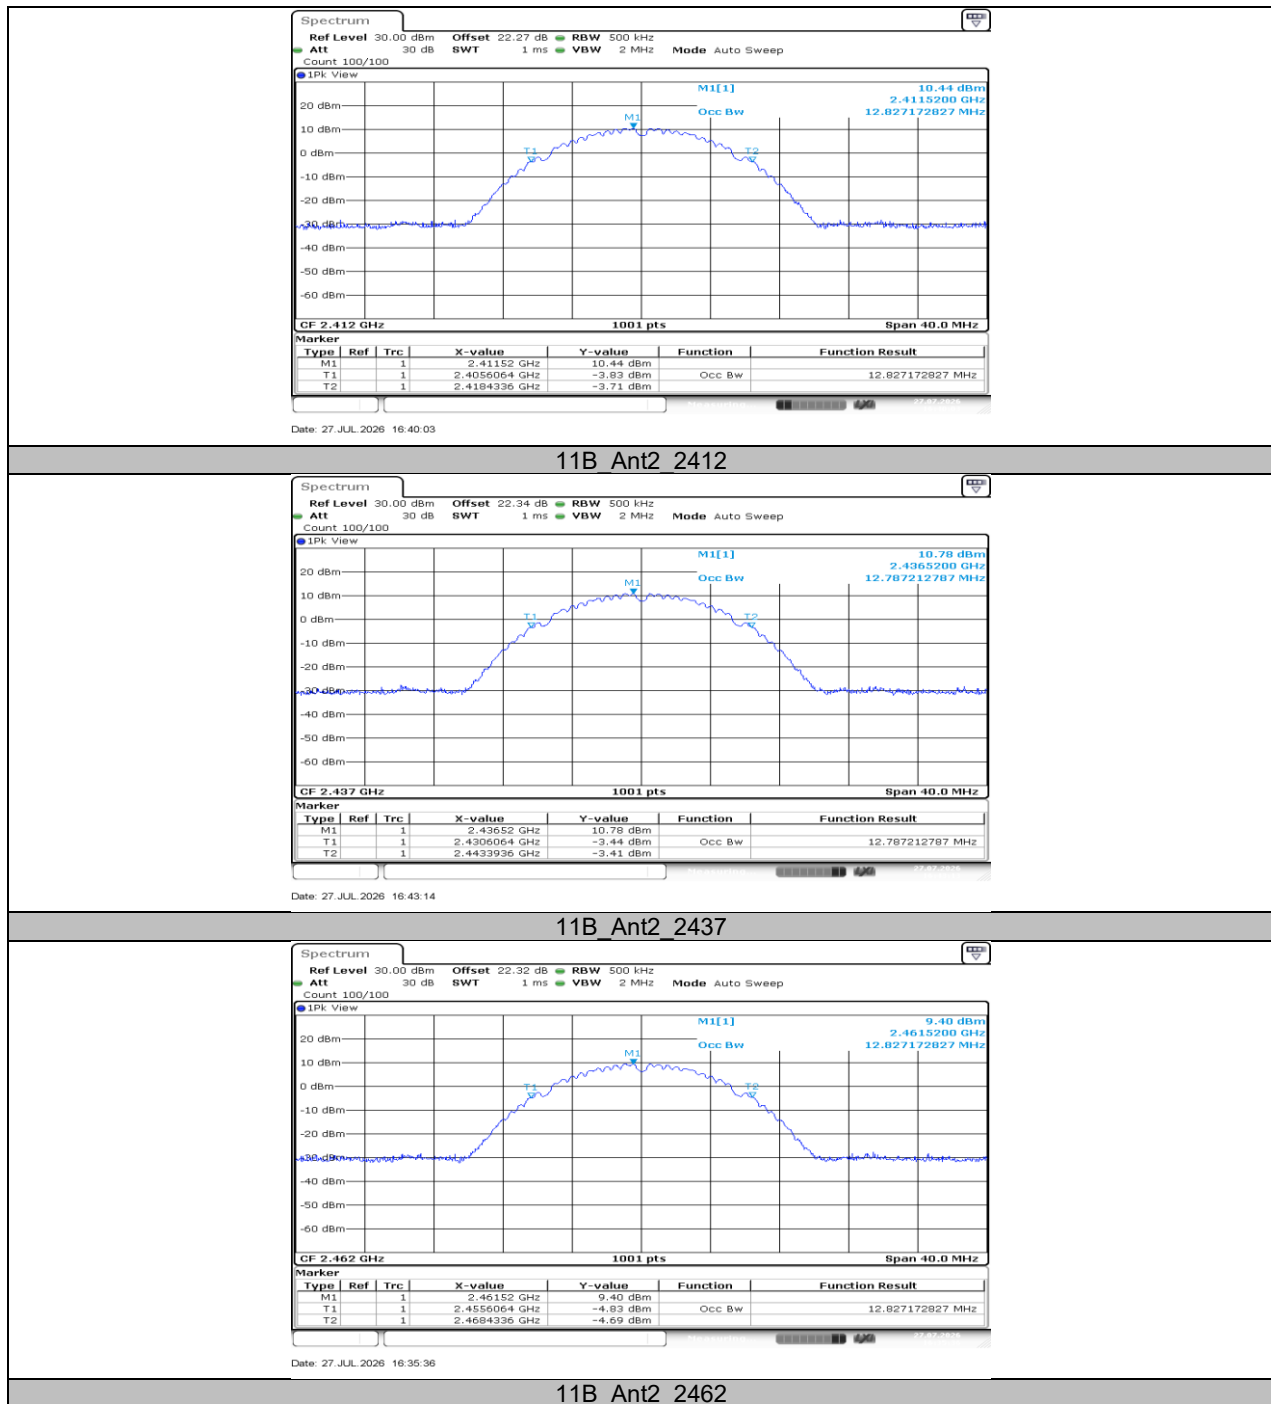


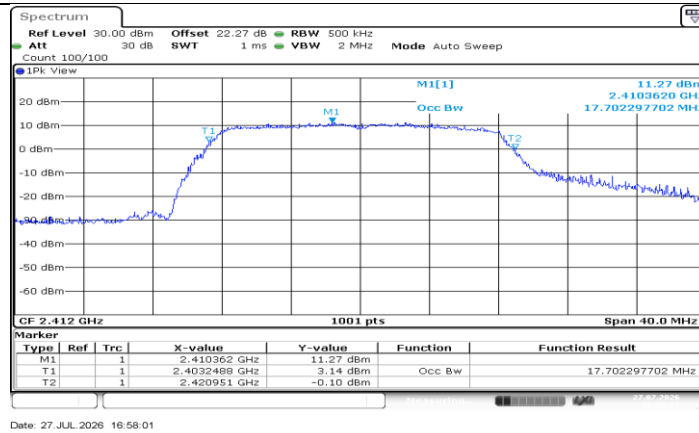


11G_Ant2_2412

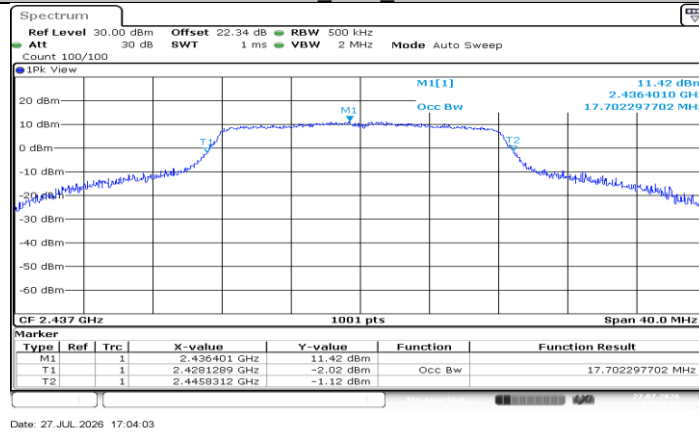


11G_Ant2_2437

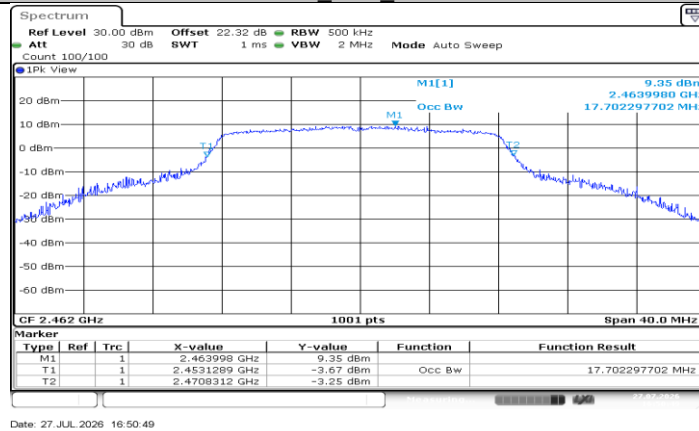


11G_Ant2_2462

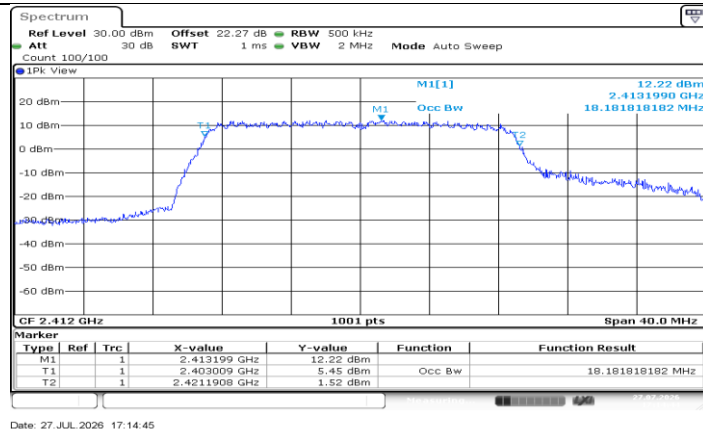


11N20MIMO_Ant2_2412

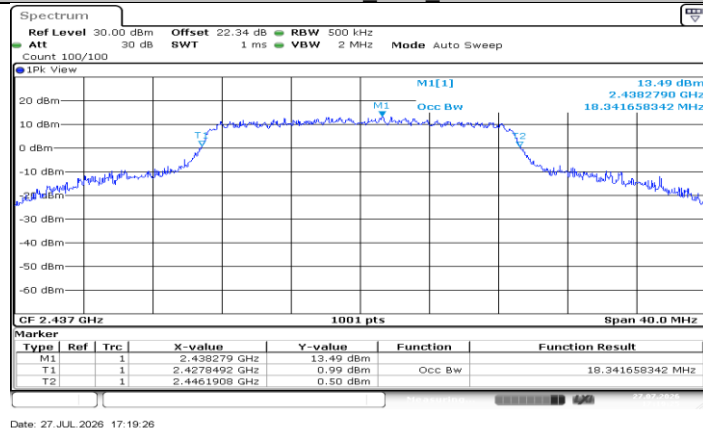


11N20MIMO_Ant2_2437

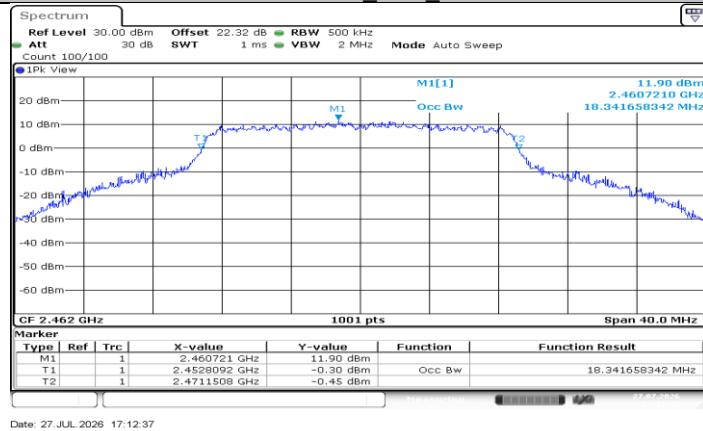


11N20MIMO_Ant2_2462

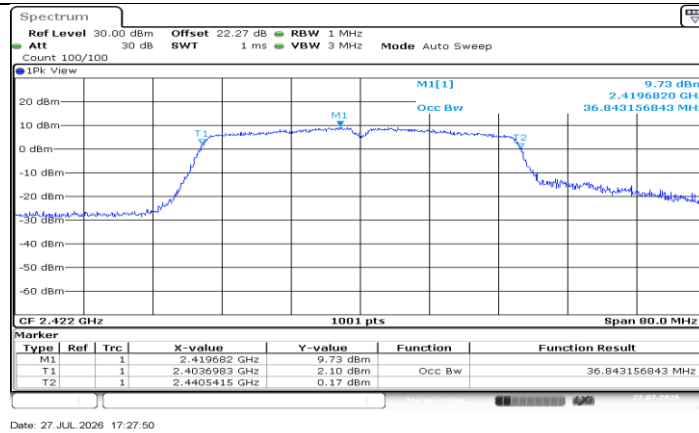


11N40MIMO_Ant2_2422

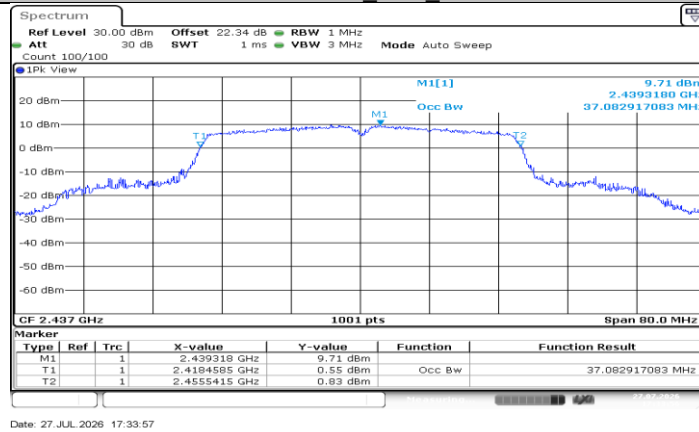


11N40MIMO_Ant2_2437

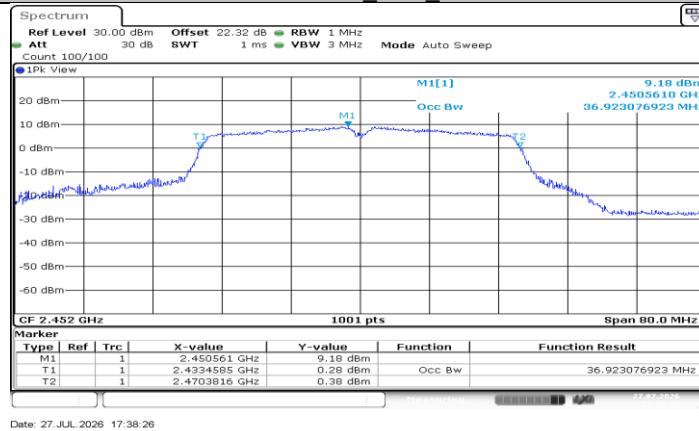


11N40MIMO_Ant2_2452

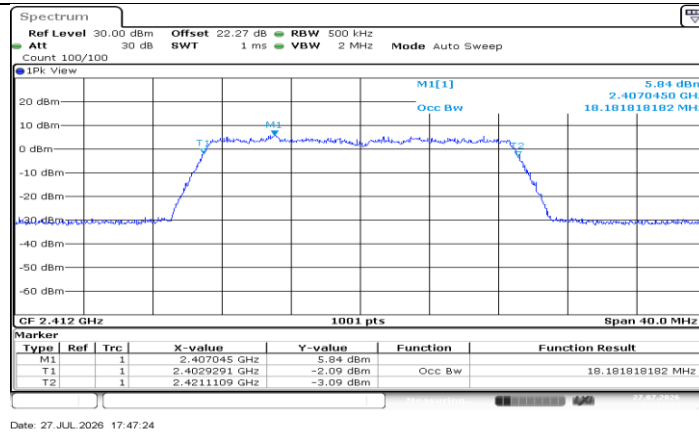


11AX20MIMO_Ant2_2412

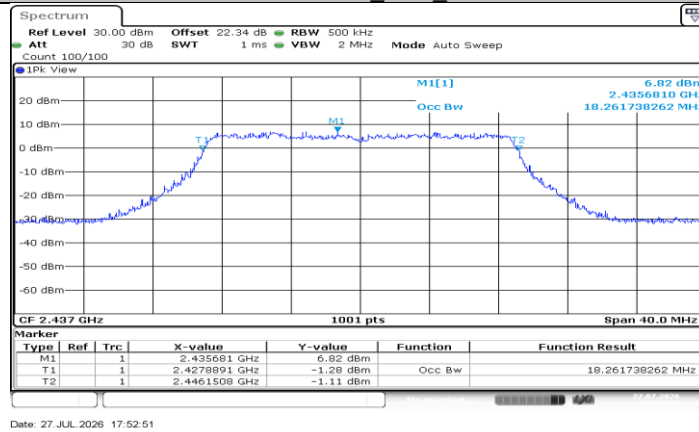


11AX20MIMO_Ant2_2437

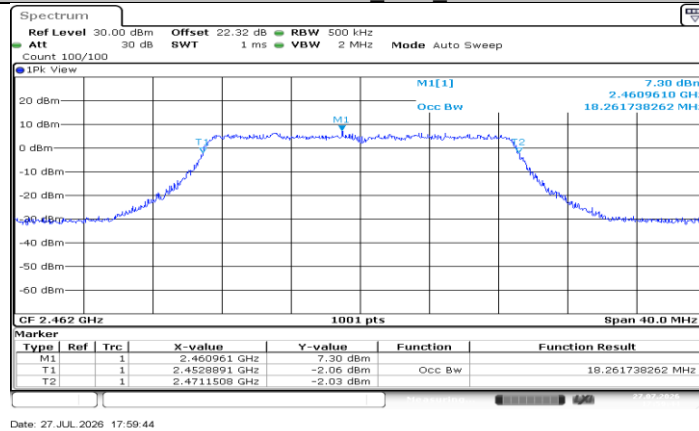


11AX20MIMO_Ant2_2462

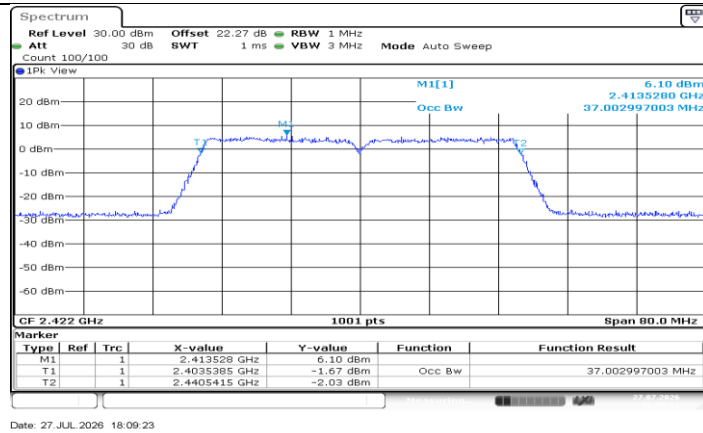

11AX40MIMO_Ant2_2422

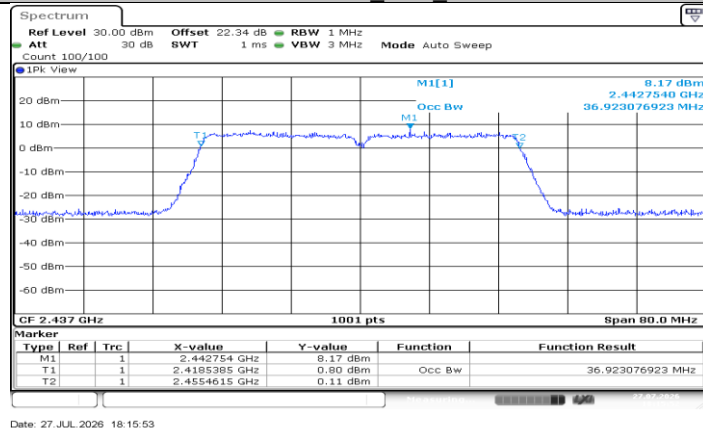

11AX40MIMO_Ant2_2437

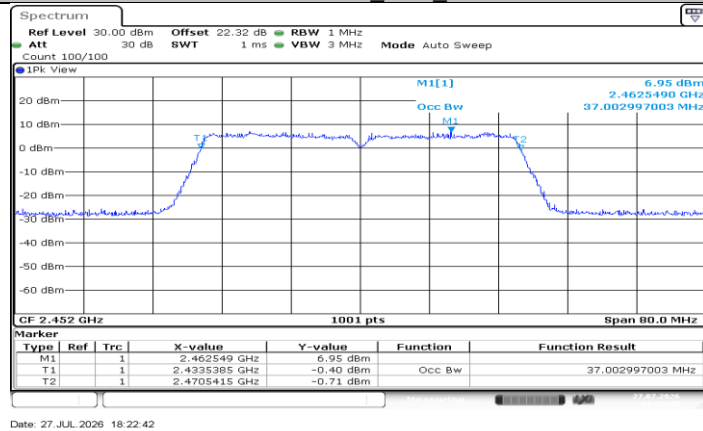

11AX40MIMO_Ant2_2452

11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	17.12	≤30.00	PASS
	Ant2	2412	17.67	≤30.00	PASS
	Ant1	2437	17.68	≤30.00	PASS
	Ant2	2437	18.03	≤30.00	PASS
	Ant1	2462	16.53	≤30.00	PASS
	Ant2	2462	16.67	≤30.00	PASS
11G	Ant1	2412	16.09	≤30.00	PASS
	Ant2	2412	16.57	≤30.00	PASS
	Ant1	2437	16.12	≤30.00	PASS
	Ant2	2437	16.47	≤30.00	PASS
	Ant1	2462	14.48	≤30.00	PASS
	Ant2	2462	14.70	≤30.00	PASS
11N20MIMO	Ant1	2412	16.06	≤30.00	PASS
	Ant2	2412	16.60	≤30.00	PASS
	total	2412	19.35	≤30.00	PASS
	Ant1	2437	16.56	≤30.00	PASS
	Ant2	2437	16.87	≤30.00	PASS
	total	2437	19.73	≤30.00	PASS
	Ant1	2462	14.95	≤30.00	PASS
	Ant2	2462	15.21	≤30.00	PASS
11N40MIMO	total	2462	18.09	≤30.00	PASS
	Ant1	2422	12.96	≤30.00	PASS
	Ant2	2422	13.33	≤30.00	PASS
	total	2422	16.16	≤30.00	PASS
	Ant1	2437	13.49	≤30.00	PASS
	Ant2	2437	13.77	≤30.00	PASS
	total	2437	16.64	≤30.00	PASS
	Ant1	2452	12.92	≤30.00	PASS
11AX20MIMO	Ant2	2452	13.11	≤30.00	PASS
	total	2452	16.03	≤30.00	PASS
	Ant1	2412	9.70	≤30.00	PASS
	Ant2	2412	10.46	≤30.00	PASS
	total	2412	13.11	≤30.00	PASS
	Ant1	2437	11.32	≤30.00	PASS
	Ant2	2437	11.86	≤30.00	PASS
	total	2437	14.61	≤30.00	PASS
11AX40MIMO	Ant1	2462	11.16	≤30.00	PASS
	Ant2	2462	11.59	≤30.00	PASS
	total	2462	14.39	≤30.00	PASS
	Ant1	2422	10.01	≤30.00	PASS
	Ant2	2422	10.45	≤30.00	PASS
	total	2422	13.25	≤30.00	PASS
	Ant1	2437	11.57	≤30.00	PASS
	Ant2	2437	11.91	≤30.00	PASS
	total	2437	14.75	≤30.00	PASS
	Ant1	2452	11.53	≤30.00	PASS
	Ant2	2452	11.77	≤30.00	PASS
	total	2452	14.66	≤30.00	PASS


11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY

11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.51	≤8.00	PASS
	Ant2	2412	-12.98	≤8.00	PASS
	Ant1	2437	-12.72	≤8.00	PASS
	Ant2	2437	-12.76	≤8.00	PASS
	Ant1	2462	-13.92	≤8.00	PASS
	Ant2	2462	-13.89	≤8.00	PASS
11G	Ant1	2412	-16.92	≤8.00	PASS
	Ant2	2412	-16.44	≤8.00	PASS
	Ant1	2437	-16.93	≤8.00	PASS
	Ant2	2437	-16.09	≤8.00	PASS
	Ant1	2462	-18.52	≤8.00	PASS
	Ant2	2462	-17.90	≤8.00	PASS
11N20MIMO	Ant1	2412	-16.65	≤7.65	PASS
	Ant2	2412	-15.90	≤7.65	PASS
	total	2412	-13.25	≤7.65	PASS
	Ant1	2437	-16.07	≤7.65	PASS
	Ant2	2437	-15.47	≤7.65	PASS
	total	2437	-12.75	≤7.65	PASS
	Ant1	2462	-17.48	≤7.65	PASS
	Ant2	2462	-17.09	≤7.65	PASS
11N40MIMO	total	2462	-14.27	≤7.65	PASS
	Ant1	2422	-20.41	≤7.65	PASS
	Ant2	2422	-20.16	≤7.65	PASS
	total	2422	-17.27	≤7.65	PASS
	Ant1	2437	-19.53	≤7.65	PASS
	Ant2	2437	-19.93	≤7.65	PASS
	total	2437	-16.72	≤7.65	PASS
	Ant1	2452	-20.48	≤7.65	PASS
11AX20MIMO	Ant2	2452	-20.32	≤7.65	PASS
	total	2452	-17.39	≤7.65	PASS
	Ant1	2412	-16.86	≤7.65	PASS
	Ant2	2412	-15.25	≤7.65	PASS
	total	2412	-12.97	≤7.65	PASS
	Ant1	2437	-15.43	≤7.65	PASS
	Ant2	2437	-13.97	≤7.65	PASS
	total	2437	-11.63	≤7.65	PASS
11AX40MIMO	Ant1	2462	-15.07	≤7.65	PASS
	Ant2	2462	-13.89	≤7.65	PASS
	total	2462	-11.43	≤7.65	PASS
	Ant1	2422	-18.12	≤7.65	PASS
	Ant2	2422	-15.80	≤7.65	PASS
	total	2422	-13.80	≤7.65	PASS
	Ant1	2437	-16.18	≤7.65	PASS
	Ant2	2437	-14.03	≤7.65	PASS
11AX20MIMO	total	2437	-11.96	≤7.65	PASS
	Ant1	2452	-16.44	≤7.65	PASS
	Ant2	2452	-14.31	≤7.65	PASS
	total	2452	-12.24	≤7.65	PASS

11.4.2. Test Graphs

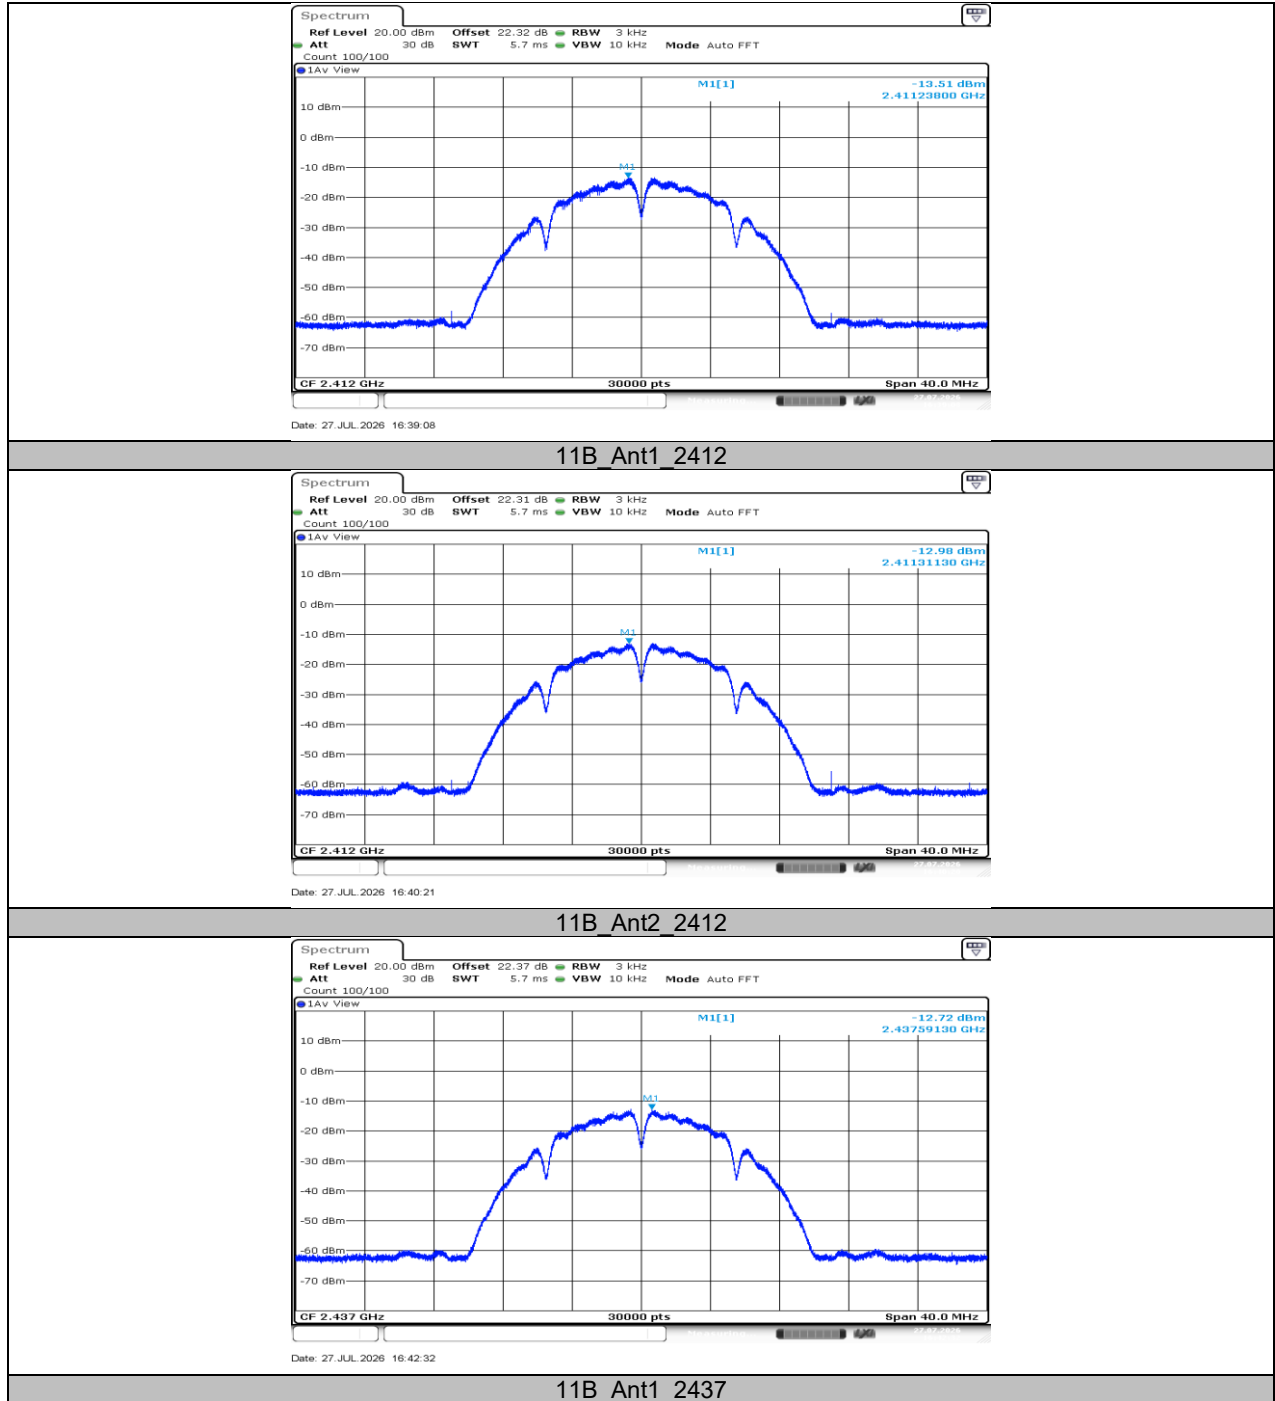


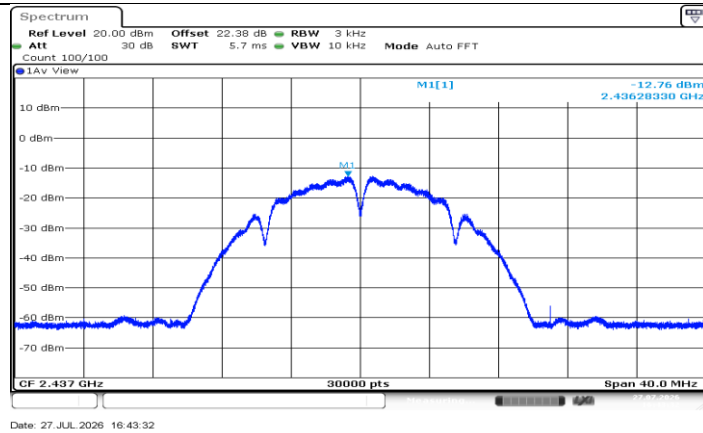


11B_Ant2_2437

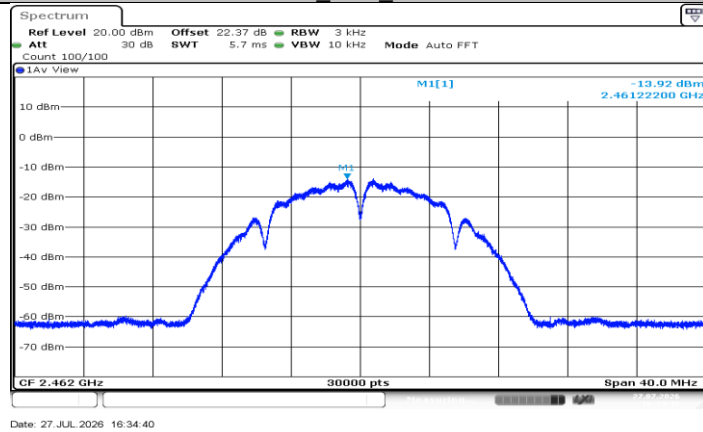


11B_Ant1_2462

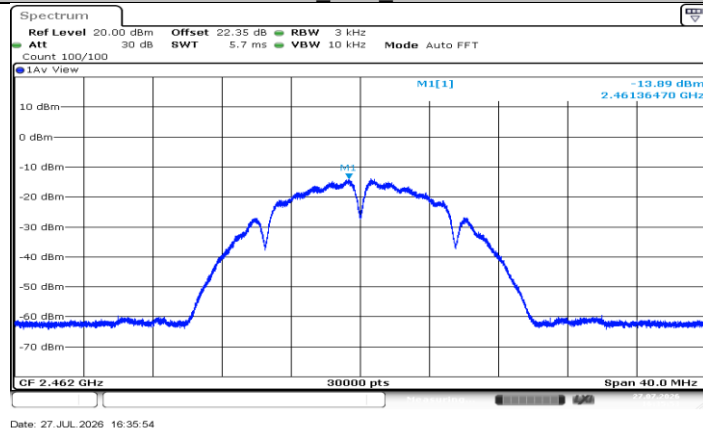


11B_Ant2_2462

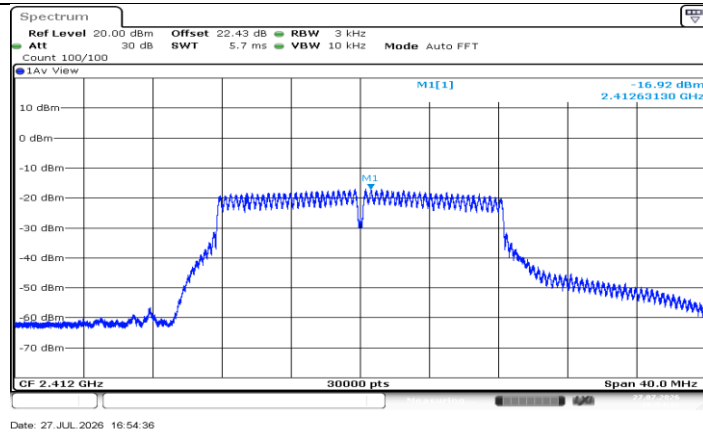




11G_Ant1_2412

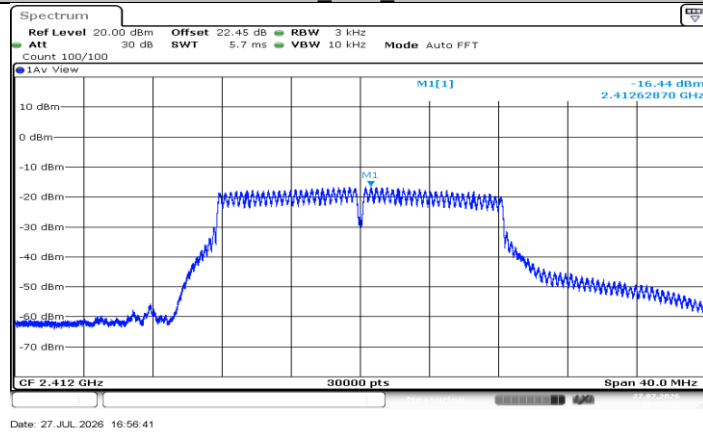


11G_Ant2_2412

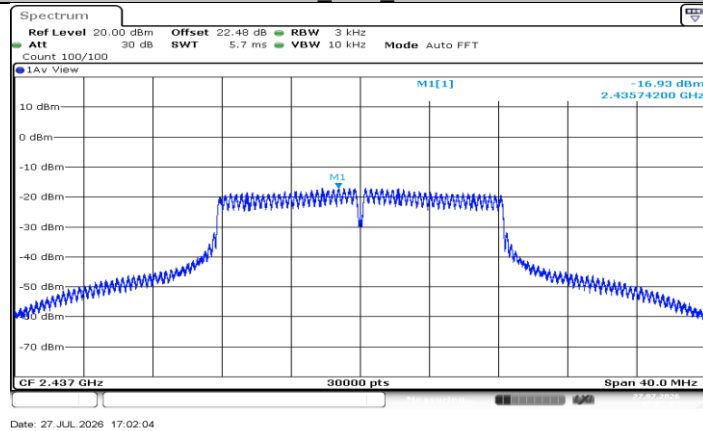


11G_Ant1_2437




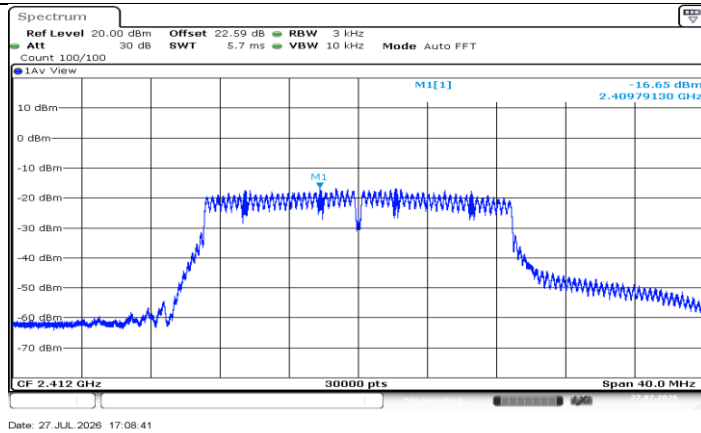

11N20MIMO_Ant1_2412

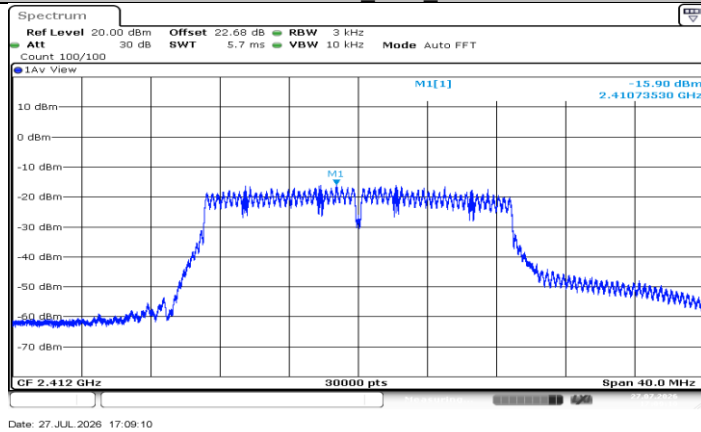

11N20MIMO_Ant2_2412

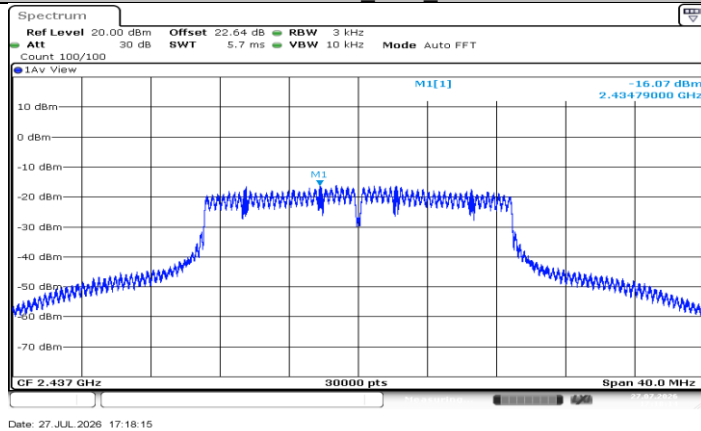

11N20MIMO_Ant1_2437