



MEASUREMENT REPORT

FCC PART 15.249

FCC ID: TW8PS3-CR

APPLICANT: dreamGEAR, LLC.

Application Type: Certification

Product: Controller Receiver

Model No.: DGPS3-1391, DGPS3-1392, DGPS3-1394,
DGPS3-3866, DGPS3-3859

FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): Part 15.249

Test Procedure(s): ANSI C63.10-2009

Test Date: May 13 ~ 18, 2014

Reviewed By : Robin Wu
(Robin Wu)

Approved By : Marlin Chen
(Marlin Chen)

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2009. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1405RSU00501	Rev. 01	Initial report	05-22-2014
1405RSU00501	Rev. 02	Corrected the harmonic Radiated Emission Limit	05-26-2014
1405RSU00501	Rev. 03	Corrected the harmonic Radiated Emission measurement margin	05-27-2014

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Channel List	8
2.3. Mode of Operation	9
2.4. Test Configuration	9
2.5. EMI Suppression Device(s)/Modifications.....	9
2.6. Labeling Requirements.....	9
2.7. Description of Support Units	9
2.8. Test Software	9
3. DESCRIPTION OF TEST	10
3.1. Evaluation Procedure	10
3.2. AC Line Conducted Emissions	10
3.3. Radiated Emissions	11
4. ANTENNA REQUIREMENTS.....	12
5. TEST EQUIPMENT CALIBRATION DATA	13
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary	15
7.2. Conducted Emission.....	16
7.2.1. Test Limit	16
7.2.2. Test Setup.....	16
7.2.3. Test Result.....	17
7.3. Radiated Emission.....	19
7.3.1. Test Limit	19
7.3.2. Test Setup.....	20
7.3.3. Test Result.....	22
7.4. Band-edge Compliance of RF Conducted Emissions.....	36
7.4.1. Test Limit	36
7.4.2. Test Procedure.....	36
7.4.3. Test Setup.....	37



7.4.4. Test Result.....	38
8. CONCLUSION.....	39

§2.1033 General Information

Applicant:	dreamGEAR, LLC.
Applicant Address:	20001 S. Western Ave Torrance, CA 90501, United States
Manufacturer:	Creative Game Accessories Co., LTD
Manufacturer Address:	2/F, Block A, No.1 Industrial Park, Phoenix No.3 Industrial Zone, Fuyong Street, Bao'an District, Shenzhen, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part 15.249
Model No.:	DGPS3-1391, DGPS3-1392, DGPS3-1394, DGPS3-3866, DGPS3-3859
FCC ID:	TW8PS3-CR
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Low Power Communication Device Transmitter (DXX)
Date(s) of Test:	May 13 ~ 18, 2014
Test Report S/N:	1405RSU00501

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Controller Receiver
Model No.	DGPS3-1391, DGPS3-1392, DGPS3-1394, DGPS3-3866, DGPS3-3859
Working Voltage	DC 5.0V
Frequency Range	2405 - 2475 MHz
Channel Number	71
Type of Modulation	GFSK
Data Rate	1Mbps
Channel Control	Auto
Antenna Type	PCB Antenna
Antenna Gain	0dBi

2.2. Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2405 MHz	01	2406 MHz	02	2407 MHz
03	2408 MHz	04	2409 MHz	05	2410 MHz
06	2411 MHz	07	2412 MHz	08	2413 MHz
09	2414 MHz	10	2415 MHz	11	2416 MHz
12	2417 MHz	13	2417 MHz	14	2419 MHz
15	2420 MHz	16	2421 MHz	17	2422 MHz
18	2423 MHz	19	2424 MHz	20	2425 MHz
21	2426 MHz	22	2427 MHz	23	2428 MHz
24	2429 MHz	25	2430 MHz	26	2431 MHz
27	2432 MHz	28	2433 MHz	29	2434 MHz
30	2435 MHz	31	2436 MHz	32	2437 MHz
33	2438 MHz	34	2439 MHz	35	2440 MHz
36	2441 MHz	37	2442 MHz	38	2443 MHz
39	2444 MHz	40	2445 MHz	41	2446 MHz
42	2447 MHz	43	2448 MHz	44	2449 MHz
45	2450 MHz	46	2451 MHz	47	2452 MHz
48	2453 MHz	49	2454 MHz	50	2455 MHz
51	2456 MHz	52	2457 MHz	53	2458 MHz
54	2459 MHz	55	2460 MHz	56	2461 MHz
57	2462 MHz	58	2463 MHz	59	2464 MHz
60	2465 MHz	61	2466 MHz	62	2467 MHz
63	2468 MHz	64	2469 MHz	65	2470 MHz
66	2471 MHz	67	2472 MHz	68	2473 MHz
69	2474 MHz	70	2475 MHz	N/A	N/A

2.3. Mode of Operation

All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit

Note: Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

2.4. Test Configuration

The **Controller Receiver FCC ID: TW8PS3-CR** was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207,15.209, 15.215 and 15.249. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.7. Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Notebook	Lenovo	E430c

2.8. Test Software

The test unit set it at the low, middle and high channel by pressing the button.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the requirements provided in FCC 15.207, 15.209, 15.215 and 15.249 were performed in the report of the **Controller Receiver FCC ID: TW8PS3-CR.**

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2009 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.2.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB BeamWidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Controller Receiver** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **Controller Receiver FCC ID: TW8PS3-CR** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATA

Conducted Emissions

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	101209	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101683	1 year	2014/11/08
Two-Line V-Network	R&S	ENV216	101684	1 year	2014/11/08
Temperature/ Meter Humidity	Anymetre	TH101B	SR2-01	1 year	2014/11/15

Radiated Emission

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Preamplifier	MRT	AP01G18	1310002	1 year	2014/12/14
Loop Antenna	Schwarzbeck	FMZB1519	1519-041	1 year	2014/11/24
TRILOG Antenna	Schwarzbeck	VULB9162	9162-047	1 year	2014/11/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1167	1 year	2014/11/24
Broadband Horn Antenna	Schwarzbeck	BBHA9170	9170-549	1 year	2014/12/11
Temperature/Humidity Meter	Anymetre	TH101B	AC1-01	1 year	2014/11/15

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9010A	MY5144016A	1 year	2015/01/04
Power Sensor	Agilent	U2021XA	MY52450003	1 year	2014/12/14
Temperature/Humidity Meter	Anymetre	TH101B	TR3-01	1 year	2014/11/15

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 40GHz: $\pm 4.76\text{dB}$

7. TEST RESULT

7.1. Summary

Company Name: dreamGEAR, LLC.

FCC ID: TW8PS3-CR

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.2
15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.3
15.215(c)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$	Conducted	Pass	Section 7.4

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. Conducted Emission


7.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

7.2.2. Test Setup

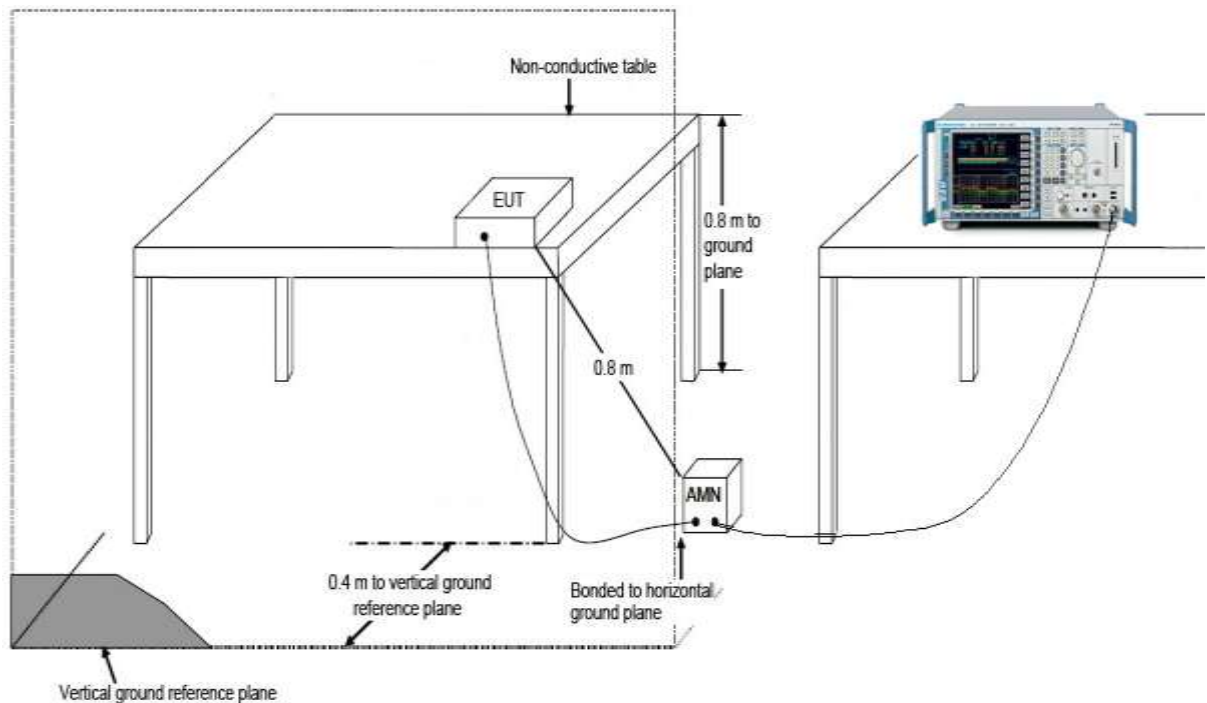

7.2.3. Test Result

Engineer: Milo Li	
Site: SR2	Time: 2014/05/13 - 17:41
Limit: FCC_Part15.207_CE_AC Power_ Class B	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Controller Receiver	Power: AC 120V/60Hz
Note: Normal Operation	

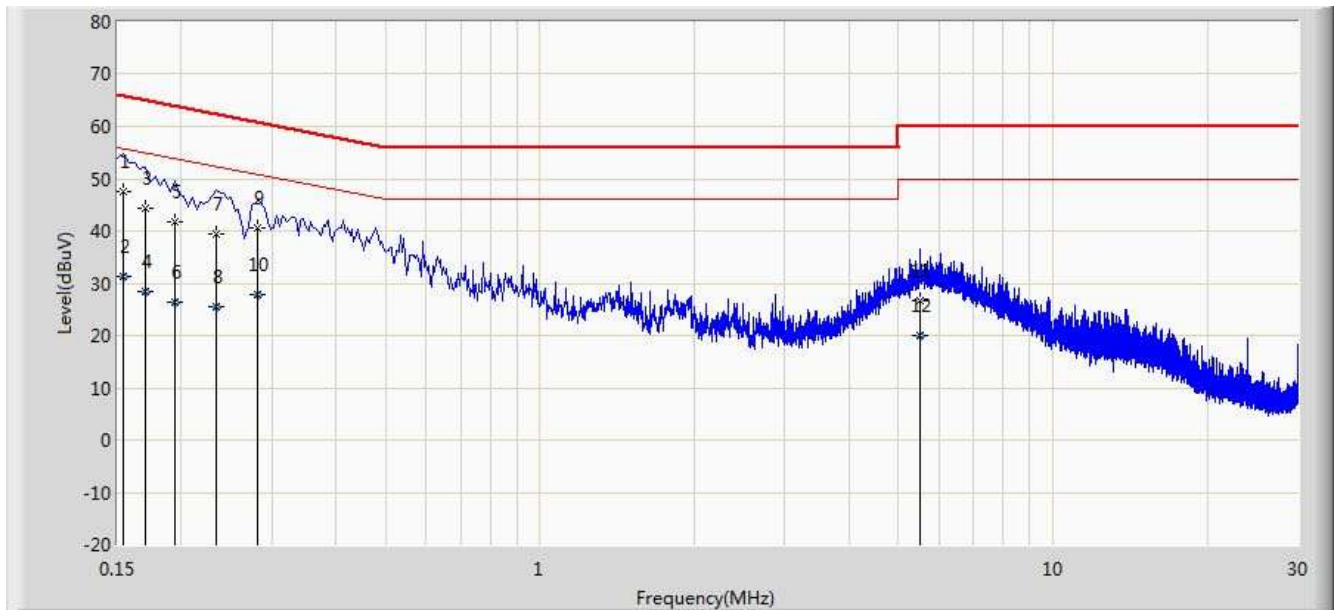


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	47.450	36.711	-18.331	65.781	10.740	QP
2			0.154	31.263	20.523	-24.519	55.781	10.740	AV
3			0.170	44.317	34.240	-20.643	64.960	10.078	QP
4			0.170	28.527	18.450	-26.433	54.960	10.078	AV
5			0.194	41.750	31.733	-22.114	63.864	10.017	QP
6			0.194	26.326	16.309	-27.538	53.864	10.017	AV
7			0.234	39.383	29.432	-22.924	62.307	9.951	QP
8			0.234	25.480	15.530	-26.826	52.307	9.951	AV
9			0.282	40.509	30.519	-20.248	60.757	9.990	QP
10			0.282	27.860	17.871	-22.896	50.757	9.990	AV
11			5.522	26.725	16.653	-33.275	60.000	10.072	QP
12			5.522	20.061	9.989	-29.939	50.000	10.072	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Engineer: Milo Li	
Site: SR2	Time: 2014/05/13 - 17:48
Limit: FCC_Part15.207_CE_AC Power_ Class B	Margin: 0
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Controller Receiver	Power: AC 120V/60Hz
Note: Normal Operation	

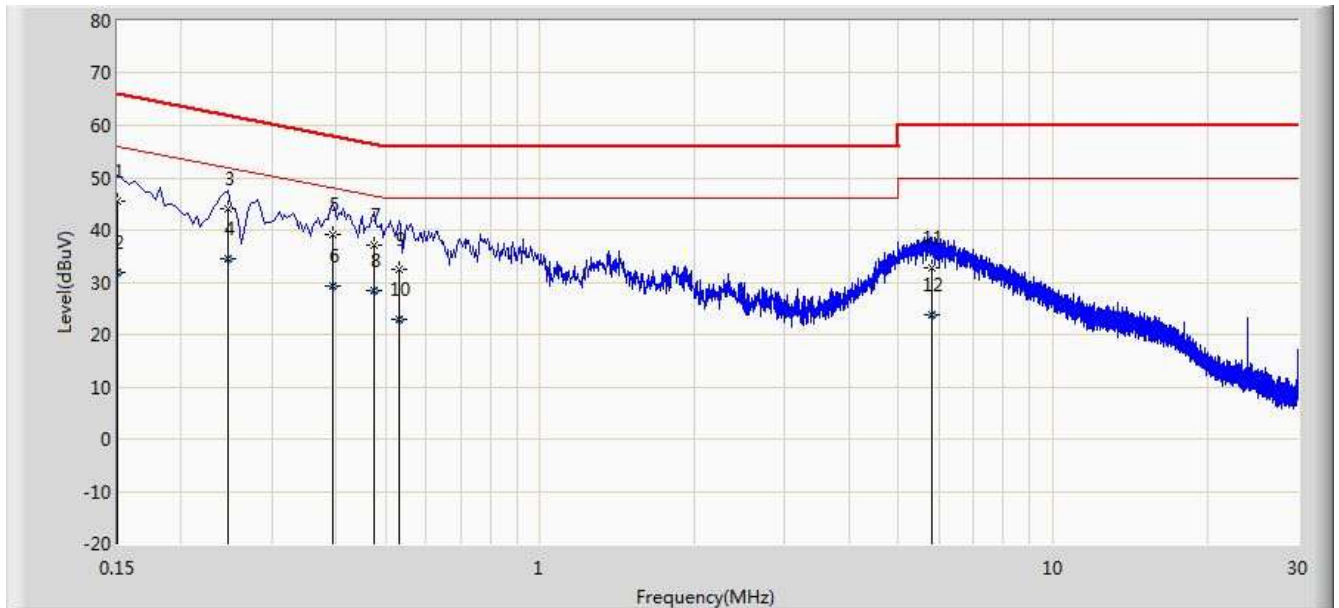

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	45.423	34.281	-20.577	66.000	11.142	QP
2			0.150	31.789	20.647	-24.211	56.000	11.142	AV
3			0.246	44.060	34.062	-17.831	61.891	9.998	QP
4		*	0.246	34.598	24.600	-17.293	51.891	9.998	AV
5			0.394	39.014	28.906	-18.965	57.979	10.108	QP
6			0.394	29.148	19.040	-18.831	47.979	10.108	AV
7			0.474	37.073	26.905	-19.371	56.444	10.167	QP
8			0.474	28.289	18.122	-18.154	46.444	10.167	AV
9			0.530	32.386	22.217	-23.614	56.000	10.169	QP
10			0.530	22.779	12.610	-23.221	46.000	10.169	AV
11			5.822	32.680	22.572	-27.320	60.000	10.109	QP
12			5.822	23.875	13.766	-26.125	50.000	10.109	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7.3. Radiated Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (uV/m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-80	100**	3
80-216	150**	3
216-960	200**	3
Above 960	500	3

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).

FCC Part 15 Subpart C Paragraph 15.249		
Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902-928(MHz)	50	500
2400-2483.5(MHz)	50	500
5725-5875(MHz)	50	500
24.0-24.25(GHz)	250	2500


FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for

harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general


radiated emission limits in §15.209, whichever is the lesser attenuation.

7.3.2. Test Setup


9kHz ~ 30MHz Test Setup:

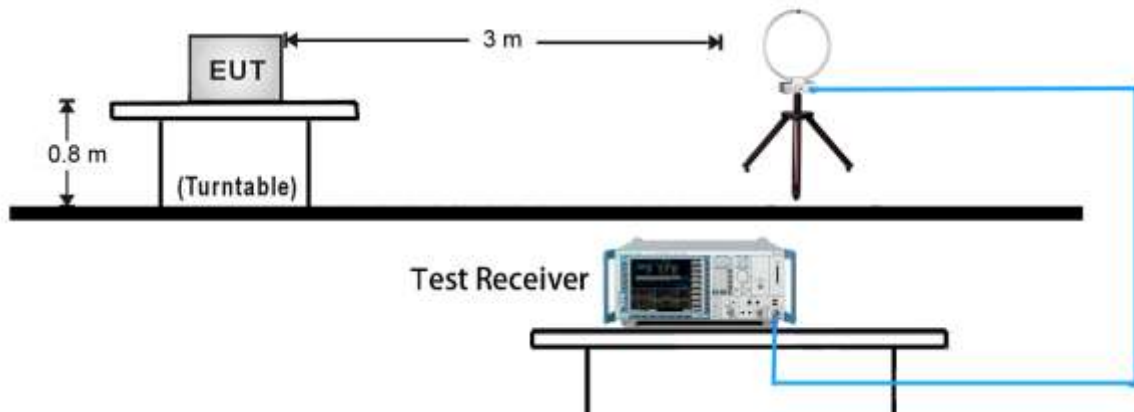

30MHz ~ 1GHz Test Setup:

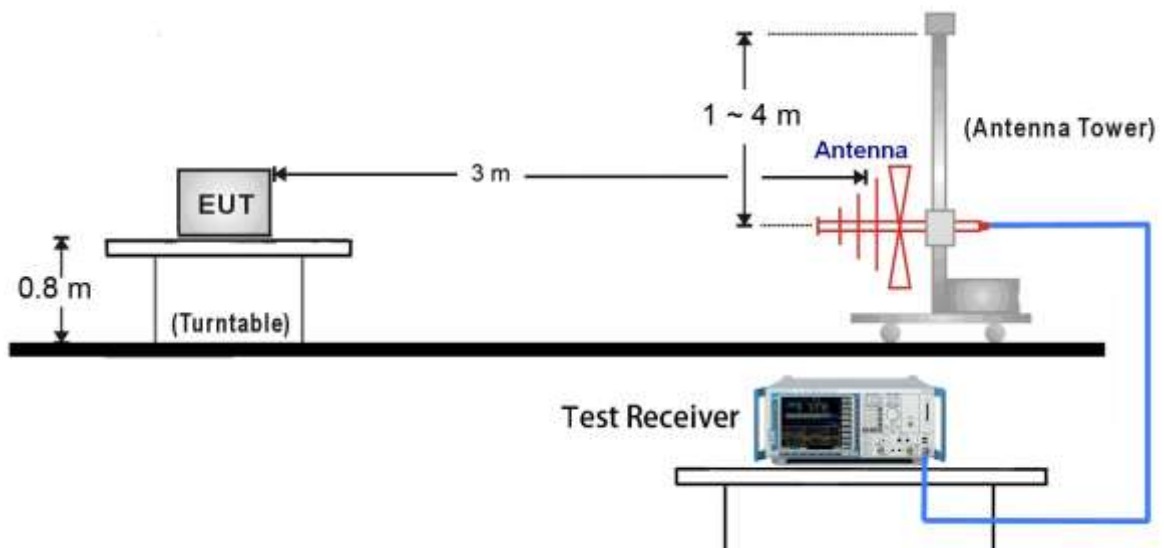

1GHz ~ 25GHz Test Setup:

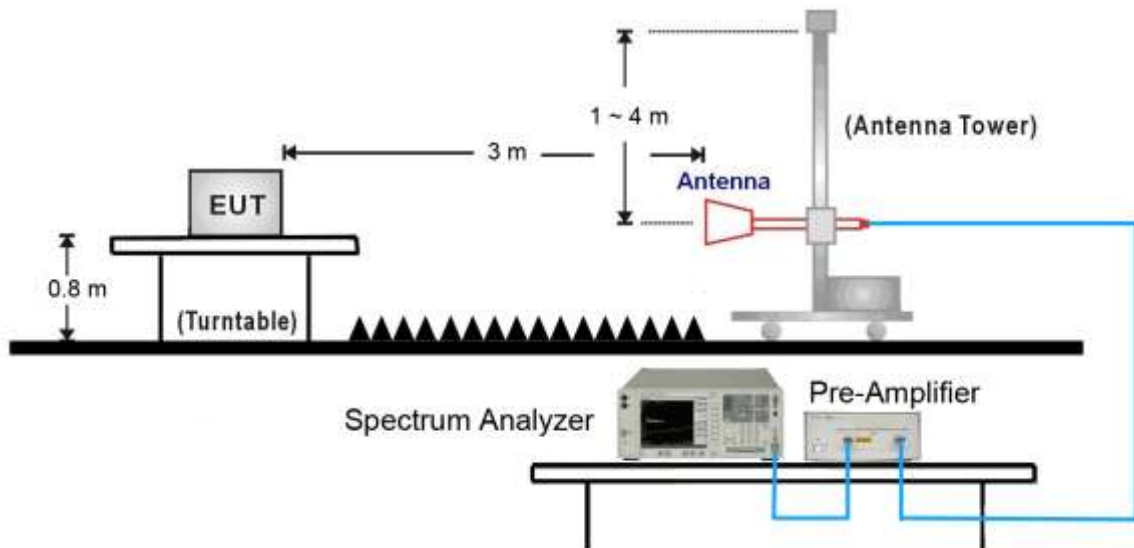

7.3.3. Test Result

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00-70	Test Engineer:	Roy Cheng
Remark:	Fundamental Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
2405	44.98	30.66	75.64	114.0	-38.36	Peak	Horizontal
	44.52	30.66	75.18	114.0	-38.82	Peak	Vertical
2437	48.14	30.60	78.74	114.0	-35.26	Peak	Horizontal
	43.52	30.60	74.12	114.0	-39.88	Peak	Vertical
2475	40.87	30.65	71.52	114.0	-42.48	Peak	Horizontal
	41.74	30.65	72.39	114.0	-41.61	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00-70	Test Engineer:	Roy Cheng
Remark:	Fundamental Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
2405	42.61	30.66	73.27	94.0	-20.73	AV	Horizontal
	42.96	30.66	73.62	94.0	-20.38	AV	Vertical
2437	46.76	30.60	77.36	94.0	-16.64	AV	Horizontal
	41.90	30.60	72.50	94.0	-21.50	AV	Vertical
2475	38.00	30.65	68.65	94.0	-25.35	AV	Horizontal
	39.09	30.65	69.74	94.0	-24.26	AV	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4808.0	36.25	6.37	42.62	74.0	-31.38	PK	Horizontal
4808.0	38.32	6.37	44.69	74.0	-29.31	PK	Vertical
7213.5	39.01	13.68	52.69	74.0	-21.31	PK	Horizontal
7213.5	40.95	13.68	54.63	74.0	-19.37	PK	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4810.1	33.98	6.37	40.35	54.0	-13.65	AV	Horizontal
4809.5	36.61	6.37	42.98	54.0	-11.02	AV	Vertical
7214.9	37.52	13.69	51.21	54.0	-2.79	AV	Horizontal
7214.9	38.62	13.69	53.31	54.0	-0.69	AV	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	32	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4874.0	34.69	6.61	41.30	74.0	-32.70	PK	Horizontal
4876.0	37.93	6.62	44.55	74.0	-29.45	PK	Vertical
7307.0	35.07	13.99	49.06	74.0	-24.94	PK	Horizontal
7307.0	37.69	13.99	51.68	74.0	-22.32	PK	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	32	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4874.0	31.15	6.61	37.76	54.0	-16.24	AV	Horizontal
4876.0	34.16	6.62	40.78	54.0	-13.22	AV	Vertical
7310.9	33.01	13.99	47.00	54.0	-7.00	AV	Horizontal
7311.0	35.79	13.99	49.78	54.0	-4.22	AV	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	70	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4952.5	34.31	6.77	41.08	74.0	-32.92	PK	Horizontal
4952.5	37.02	6.77	43.79	74.0	-30.21	PK	Vertical
7426.0	35.60	14.17	49.77	74.0	-24.23	PK	Horizontal
7426.0	36.51	14.17	50.68	74.0	-23.32	PK	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	70	Test Engineer:	Roy Cheng
Remark:	Harmonic Radiated Emission		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4952.5	32.49	6.77	39.26	54.0	-14.74	AV	Horizontal
4952.5	34.19	6.77	40.96	54.0	-13.04	AV	Vertical
7424.9	32.91	14.17	47.08	54.0	-6.92	AV	Horizontal
7424.9	34.26	14.17	48.43	54.0	-5.57	AV	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Test Mode:	Transmission	Test Site:	AC1
Test Channel:	32	Test Engineer:	Roy Cheng
Remark:	The worst case of General Radiated Emission		


Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
251.3	17.24	13.31	30.55	46.0	-15.45	QP	Horizontal
251.3	14.41	13.31	27.72	46.0	-18.28	QP	Vertical
300.3	15.99	14.13	30.12	46.0	-15.88	QP	Horizontal
712.0	12.33	21.06	33.39	46.0	-12.61	QP	Vertical
4332.0	34.38	5.34	39.72	74.0	-34.28	PK	Horizontal
4017.5	34.76	4.50	39.26	74.0	-34.74	PK	Vertical
5411.5	32.10	6.99	39.09	74.0	-34.91	PK	Horizontal
5411.5	32.63	6.99	39.62	74.0	-34.38	PK	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 2: The test trace is same as the ambient noise (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 10:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2405MHz	

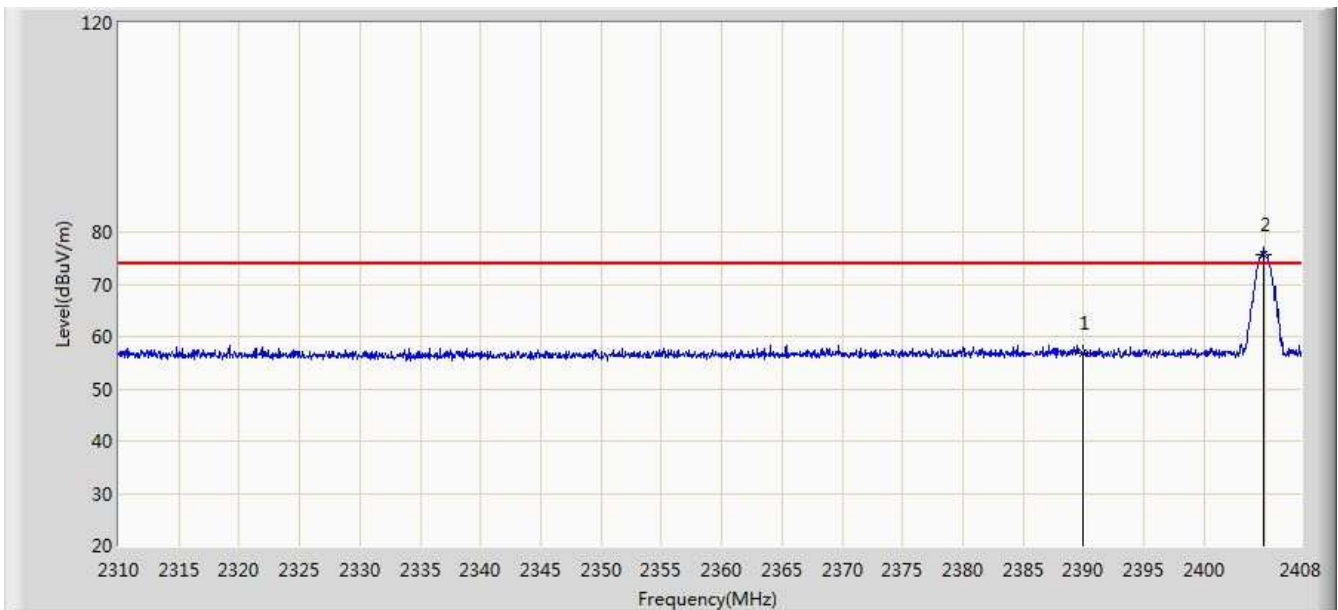

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	56.750	26.066	-17.250	74.000	30.684	PK
2		*	2404.913	75.640	44.984	N/A	N/A	30.656	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 10:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2405MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.795	13.111	-10.205	54.000	30.684	AV
2		*	2405.060	73.272	42.616	N/A	N/A	30.656	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 10:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2405MHz	

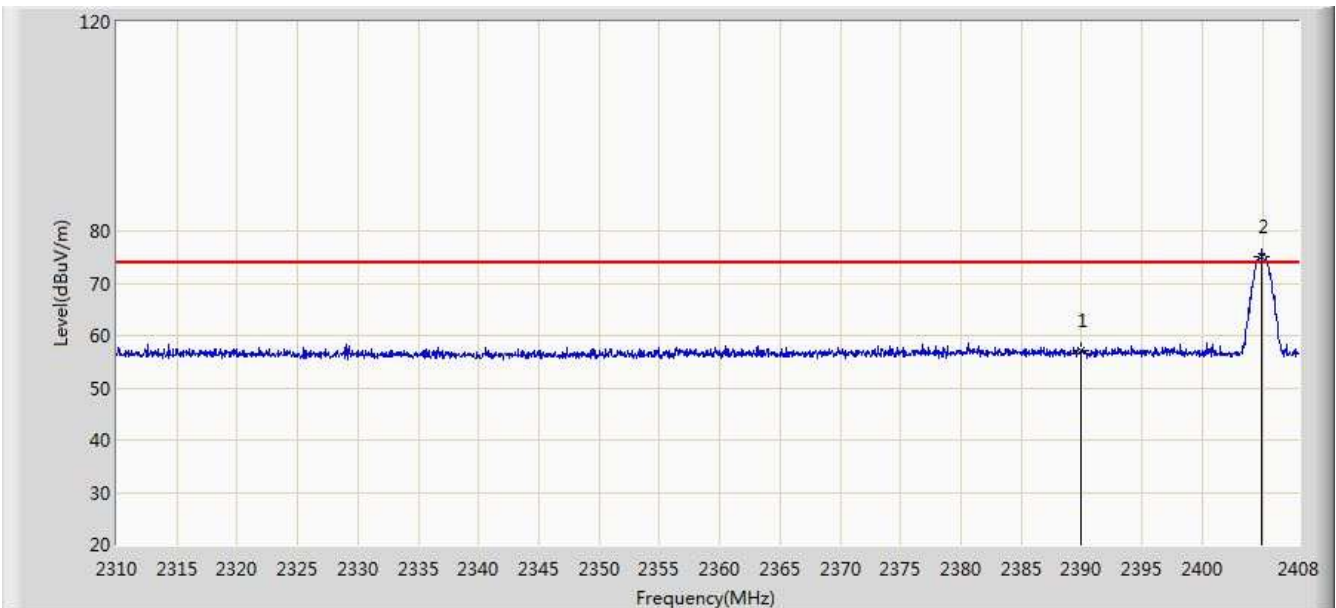

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	56.973	26.289	-17.027	74.000	30.684	PK
2		*	2404.913	75.181	44.525	N/A	N/A	30.656	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 10:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2405MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.765	13.081	-10.235	54.000	30.684	AV
2		*	2405.060	73.621	42.965	N/A	N/A	30.656	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 10:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2475MHz	

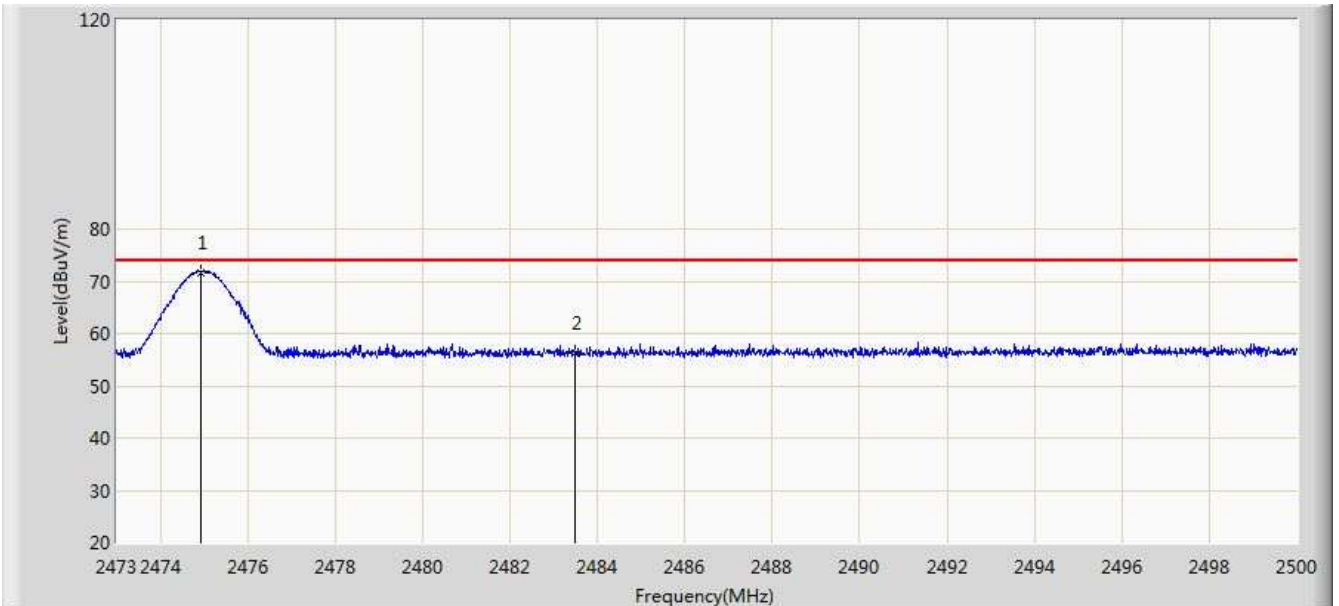


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.917	71.520	40.872	N/A	N/A	30.647	PK
2			2483.500	56.341	25.668	-17.659	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 11:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2475MHz	

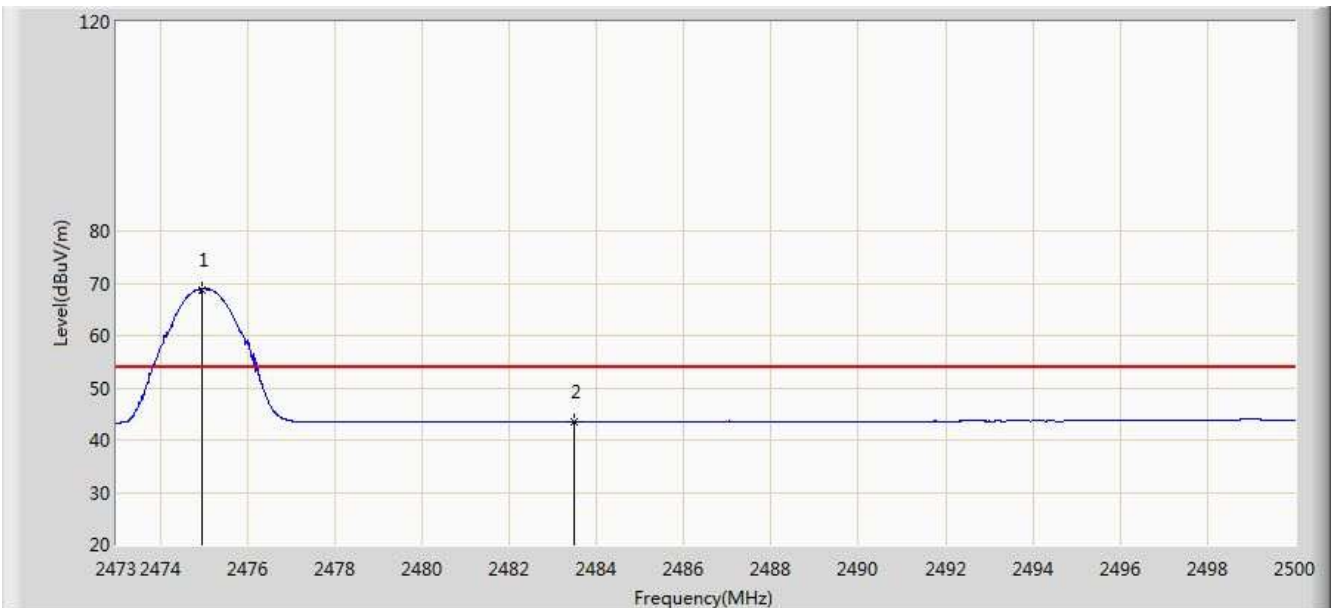


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.958	68.650	38.002	N/A	N/A	30.647	AV
2			2483.500	43.465	12.792	-10.535	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 11:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2475MHz	

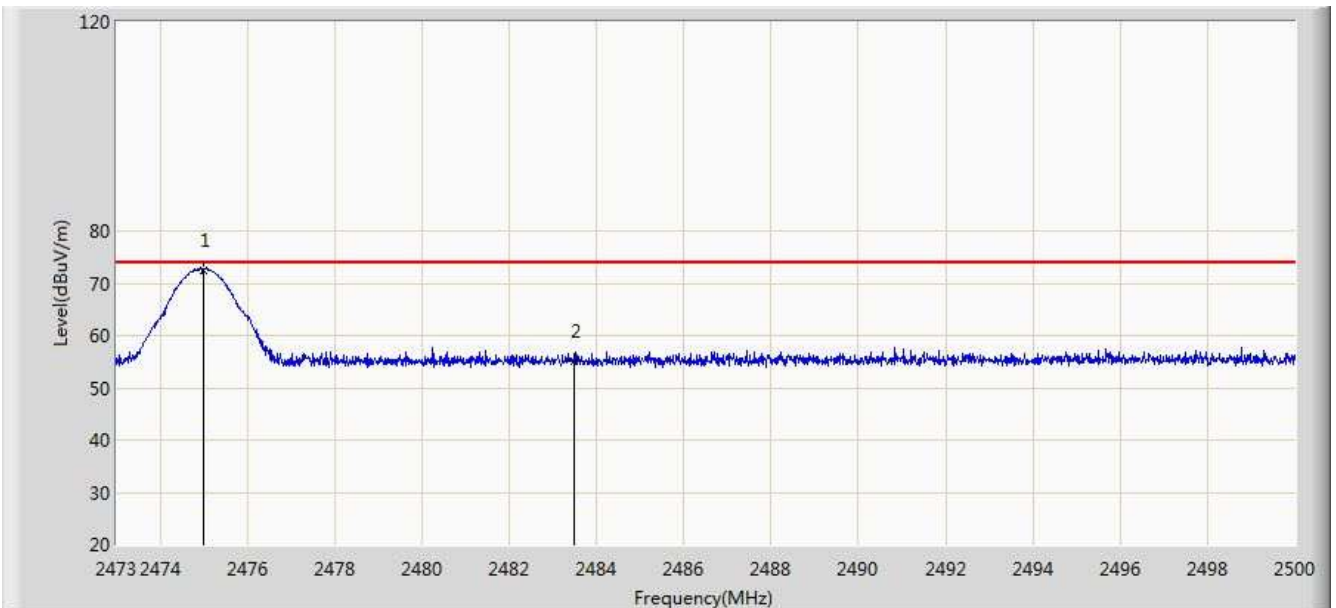


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.998	72.393	41.745	N/A	N/A	30.648	PK
2			2483.500	54.996	24.323	-19.004	74.000	30.673	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Engineer: Roy Cheng	
Site: AC1	Time: 2014/05/27 - 11:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Controller Receiver	Power: DC 5V
Note: Transmit at channel 2475MHz	

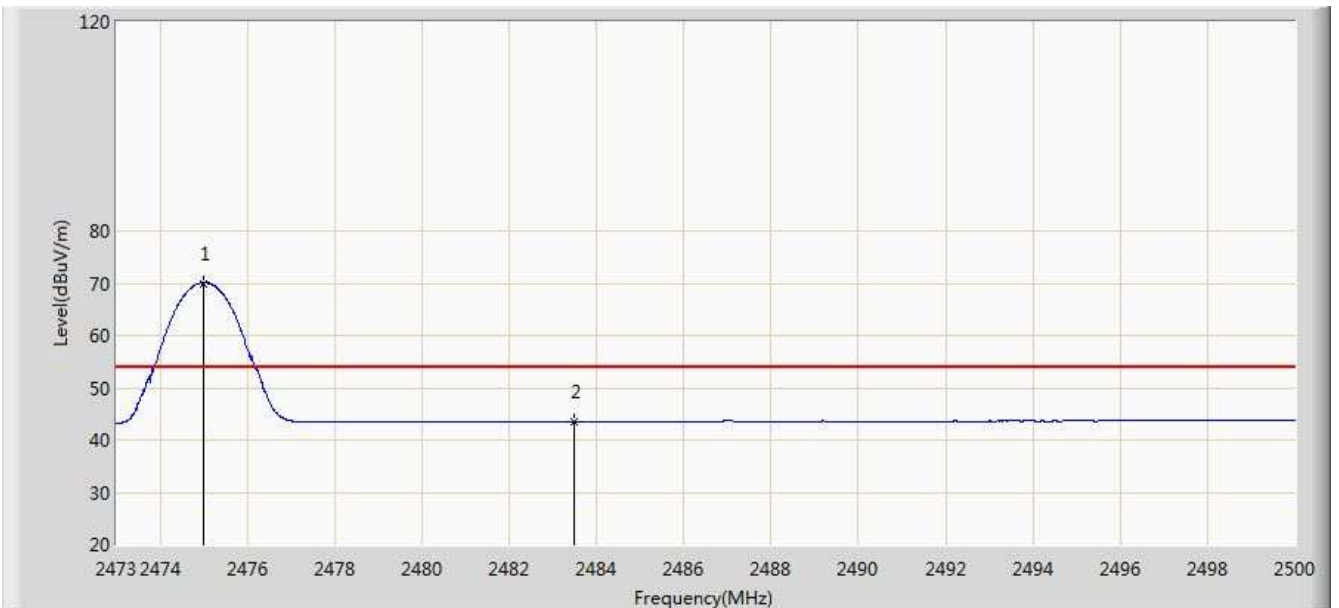

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2474.998	69.740	39.092	N/A	N/A	30.648	AV
2			2483.500	43.484	12.811	-10.516	54.000	30.673	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.4. Band-edge Compliance of RF Conducted Emissions

7.4.1. Test Limit

FCC Part 15.215 (c), Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.4.2. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto


Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.


Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

7.4.3. Test Setup

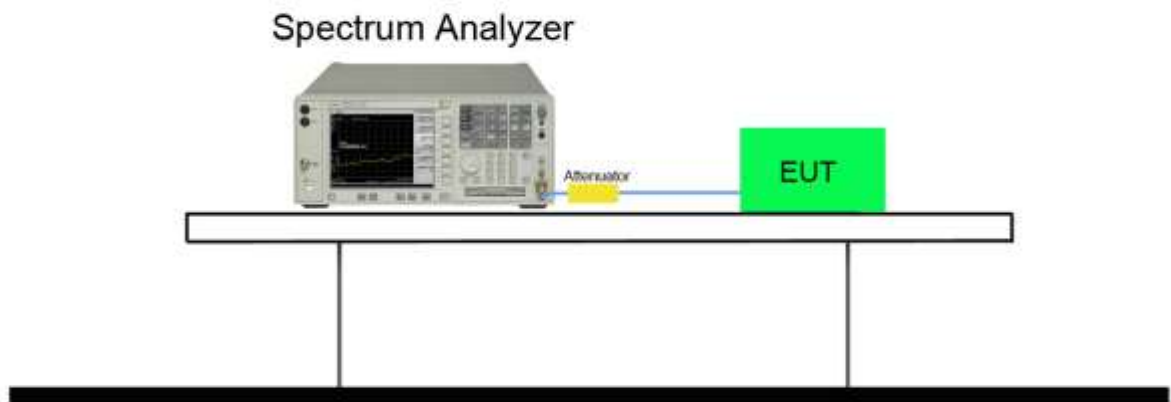

7.4.4. Test Result

Product:	Controller Receiver	Test Site:	AC1
Test Channel:	00,70	Test Engineer:	Roy Cheng
Test Item:	Band-edge Compliance of RF Conducted Emissions for FCC Part15.215		

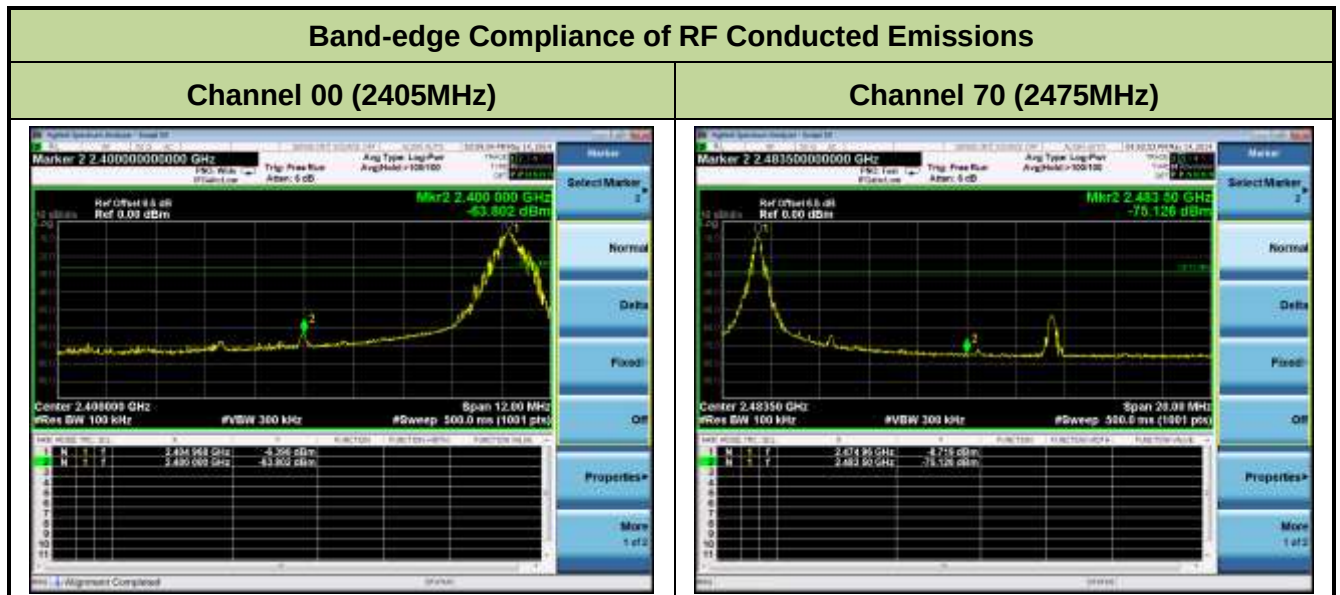

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Controller Receiver FCC ID:**

TW8PS3-CR is in compliance with Part 15C of the FCC Rules.