

APPLICATION FOR CERTIFICATION
On Behalf of

dreamGEAR LLC

PSII Lava Glow

Model Number: DGPN-551A

Prepared for : dreamGEAR LLC
20001 S Western Avenue, Torrance, C.A. USA

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06048
Date of Test : Feb.14~16, 2006
Date of Report : Feb. 24, 2006

TABLE OF CONTENTS

Description	Page
FCC Test Report for Declaration of Conformity	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details	1-1
1.3. Test Facility	1-2
1.4. Test Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
2.1. Test Equipment	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Test Limits	2-1
2.4. Configuration of EUT on Test	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit	3-2
3.4. EUT Configuration on Test	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Result	3-4
4. BAND EDGES MEASUREMENT	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup	4-1
4.3. Test Standard	4-1
4.4. Bandwidth Limit	4-1
4.5. Test Procedure	4-1
5. DEVIATION TO TEST SPECIFICATIONS	5-4
6. PHOTOGRAPH.....	6-1
6.1. Photos of Power Line Conducted Emission Test	6-1
6.2. Photos of Radiated Emission Test (In Anechoic Chamber)	6-2
6.3. Photos of Band Edges Test	6-4
APPENDIX I	(7 pages)
APPENDIX II	(19 pages)

TEST REPORT DECLARATION

Applicant : dreamGEAR LLC
 Manufacturer : E-CORE Technology Co., Ltd.
 EUT Description : PSII Lava Glow
 (A) MODEL NO. : DGPN-551A
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 5V From PS2 Input AC 120V/60Hz

Test Procedure Used:
 FCC Rules and Regulations Part 15 Subpart C Sep. 2005.

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Feb.14~16, 2006

Prepared by :


Sala Yang

Sala Yang / Assistant

Ken Lu 3/1/06

Ken Lu / Deputy Manager

Reviewer :

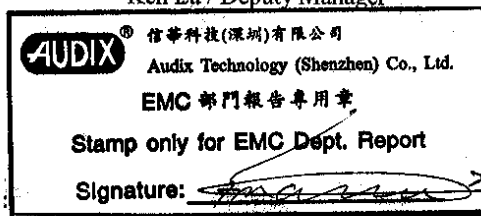

Signature: *[Signature]*

Smart Tsai / Vice General Manager

Approved & Authorized Signer :

Name of the Representative of the Responsible Party :

Signature :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	PSII Lava Glow
Model Number	:	DGPN-551A
Applicant	:	dreamGEAR LLC 20001 S Western Avenue, Torrance, C.A. USA
Manufacturer	:	E-CORE Technology Co., Ltd. 3 rd Building, Weidonglong Industry, HePing East Road, LongHua, Shenzhen, China
PS/2	:	Manufacturer: SONY M/N: SCPH-39004 S/N: FC3187704
AV Out Line	:	Shielded, Detachable, 1.8m
Date of Test	:	Feb.14~16, 2006

1.2. Tested Supporting System Details

1.2.1. TV

EMC CODE	:	ACS-EMC-TV01T
M/N	:	1419A
S/N	:	ACS-EMC-TV01T
Manufacturer	:	TCL
Data Cable	:	Unshielded, Undetachable, 1.8m
FCC ID	:	By D.O.C.
BSMI ID	:	N/A

1.3. Test Facility

Site Description

3m Anechoic Chamber	:	Certificated by FCC, USA Registration Number : 90454 Aug. 15, 2003
3m & 10m Anechoic Chamber	:	Certificated by FCC, USA Registration Number : 794232 Mar. 15, 2004
EMC Lab.	:	Certificated by DATech, German Registration Number : DAT-P-091/99-01 Feb. 02, 2004
		Certificated by NVLAP, USA NVLAP Code: 200372-0 Mar. 31, 2004
		Certificated by Nemko, Norway Aut. No.: ELA135 April. 22, 2004
Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd.
Site Location	:	No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

1.4. Test Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$

2. POWER LINE CONDUCTED EMISSION TEST


2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May 16, 05	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May 16, 05	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	May 16, 05	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	June 23, 05	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	LISN Cable 1#	Feb.16, 06	1/2 Year
6.	Coaxial Switch	Anritsu	MP59B	M55367	Feb.16, 06	1/2 Year
7.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Feb.16, 06	1/2 Year

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

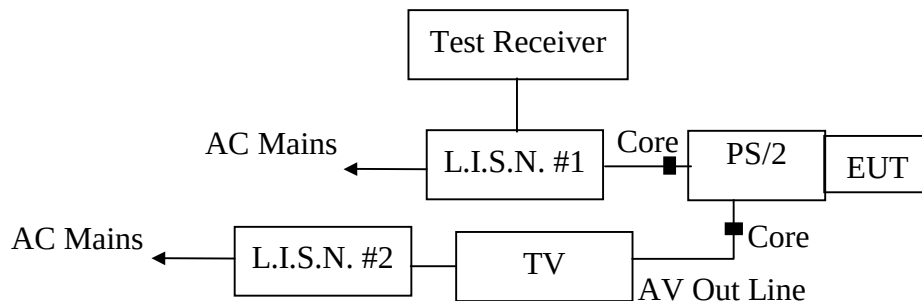

(EUT: PSII Lava Glow)

2.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1.PSII Lava Glow (EUT)

Model Number : DGPN-551A
Serial Number : N/A
Manufacturer : E-CORE Technology Co., Ltd.

2.4.2.Support Equipment : As Tested Supporting System Detail, in Section 1.2..

2.5.Operating Condition of EUT

2.5.1.Setup the EUT and simulator as shown as Section 2.2.

2.5.2.Turn on the power of all equipment.

2.5.3.Let the EUT work in test mode (TX CH 2.41GHz/ TX CH 2.44GHz/ TX CH 2.47GHz) and measure it.

2.6.Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 2.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.Emission Test are attached in Appendix I.

2.7.Power Line Conducted Emission Test Results

PASS.

The frequency range from 150kHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.


Date of Test	:	Feb. 15, 2006	Temperature	:	23°C
EUT	:	PSII Lava Glow	Humidity	:	54%
Model No.	:	DGPN-551A	Test Mode	:	TX CH 2.47GHz
Test Engineer	:	Qiyuang			

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB			
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.156	54.10	48.10	N/A	N/A	65.65	55.65
0.176	55.55	45.55	56.13	49.13	64.68	54.68
0.237	47.06	39.06	46.14	39.14	64.77	54.77
0.476	44.17	37.17	N/A	N/A	56.41	46.41
0.491	N/A	N/A	44.31	36.31	56.14	46.14
0.751	N/A	N/A	44.04	32.04	56.00	46.00
0.809	44.31	32.31	N/A	N/A	56.00	46.00
1.147	N/A	N/A	42.44	28.44	56.00	46.00
2.594	46.65	34.65	N/A	N/A	56.00	46.00
2.678	N/A	N/A	45.81	34.81	56.00	46.00

Remark: 1) If the data table appeared symbol of “N/A” means the value was too low to be measured.

2) If the data table appeared symbol of “*” means the Q.P. value is under the limit for average, so, the average value had been omitted.

Reviewer :



3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission test:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep.14, 05	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jan. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jan. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jan. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jan. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jan. 28, 06	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block diagram of connection between the EUT and simulators

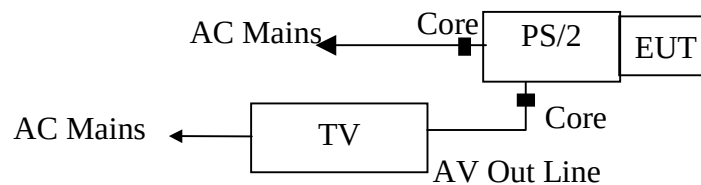

(EUT: PSII Lava Glow)

3.2.2.In Anechoic Chamber

ANTENNA TOWER

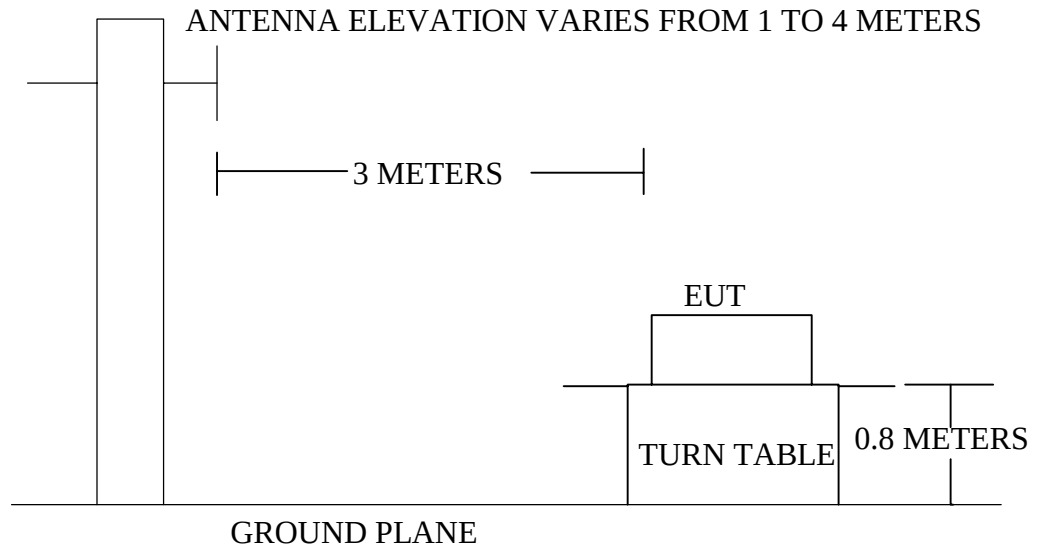

3.3.Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1.PSII Lava Glow (EUT)

Model Number : DGPN-551A
Serial Number : N/A
Manufacturer : E-CORE Technology Co., Ltd.

3.4.2.Support Equipment : As Tested Supporting System Detail, in Section 1.2.

3.5.Operating Condition of EUT

1. Setup the EUT as shown in Section 3.2..
2. Let the EUT work in test mode (TX CH2.41GHz/TX CH2.44GHz/ TX CH2.47GHz) and test it.

3.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz.

The frequency range from 30MHz to 24000MHz is checked.

The test mode (TX CH2.41GHz/TX CH2.44GHz/ TX CH2.47GHz) is tested in Anechoic Chamber, and all the scanning waveforms are attached in Appendix I.

3.7.Radiated Emission Test Result

PASS.

The frequency range from 30MHz to 24000MHz is investigated.
Please see the following pages.

Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.41GHz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
308.390	13.41	4.02	17.01	34.44	-11.56	46.00
325.850	14.32	4.16	12.17	30.65	-15.35	46.00
407.330	16.45	4.67	14.22	35.34	-10.66	46.00
589.690	18.72	5.84	9.80	34.36	-11.64	46.00
778.840	21.31	6.65	9.59	37.55	-8.45	46.00
882.630	22.05	7.37	7.81	37.23	-8.77	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 778.840MHz with corrected signal level of 37.55dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.5m high and the turn table was at 50 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.41GHz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
306.450	12.81	4.01	12.04	28.86	-17.14	46.00
441.280	16.32	4.73	8.74	29.79	-16.21	46.00
552.830	19.49	5.58	9.87	34.94	-11.06	46.00
589.690	18.93	5.84	15.91	40.68	-5.32	46.00
778.840	21.15	6.65	8.19	35.99	-10.01	46.00
882.630	22.26	7.37	8.23	37.86	-8.14	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 589.690MHz with corrected signal level of 40.68dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 330 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.44GHz


Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
259.890	13.13	3.68	12.78	29.59	-16.41	46.00
297.720	13.28	3.88	12.77	29.94	-16.06	46.00
308.390	13.41	4.02	17.01	34.44	-11.56	46.00
407.330	16.45	4.67	14.22	35.34	-10.66	46.00
589.690	18.72	5.84	9.80	34.36	-11.64	46.00
778.840	21.31	6.65	9.59	37.55	-8.45	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 778.840MHz with corrected signal level of 37.55dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.5m high and the turn table was at 50 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer : 

Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.44GHz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
307.420	4.01	12.79	12.14	28.94	-17.06	46.00
441.280	4.73	16.32	8.74	29.79	-16.21	46.00
552.830	5.58	19.49	9.87	34.94	-11.06	46.00
589.690	5.84	18.93	15.91	40.68	-5.32	46.00
778.840	6.65	21.15	8.19	35.99	-10.01	46.00
882.630	7.37	22.26	8.23	37.86	-8.14	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 589.690MHz with corrected signal level of 40.68dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 330 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.47GHz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
308.390	4.02	13.41	17.01	34.44	-11.56	46.00
407.330	4.67	16.45	14.22	35.34	-10.66	46.00
589.690	5.84	18.72	9.80	34.36	-11.64	46.00
778.840	6.65	21.31	9.59	37.55	-8.45	46.00
843.830	6.91	22.08	7.74	36.73	-9.27	46.00
882.630	7.37	22.05	7.81	37.23	-8.77	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 778.840MHz with corrected signal level of 37.55dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.5m high and the turn table was at 50 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.16, 2006	Temperature :	23°C
EUT :	PSII Lava Glow	Humidity :	54%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Mario	Memo :	CH2.47GHz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
307.420	4.01	12.79	12.14	28.94	-17.06	46.00
441.280	4.73	16.32	8.74	29.79	-16.21	46.00
552.830	5.58	19.49	9.87	34.94	-11.06	46.00
589.690	5.84	18.93	15.91	40.68	-5.32	46.00
710.940	6.50	21.01	6.62	34.13	-11.87	46.00
778.840	6.65	21.15	8.19	35.99	-10.01	46.00


Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 589.690MHz with corrected signal level of 40.68dBμV/m(Limit is 46.00 dBμV/m) when the antenna was at horizontal polarization and at 1.8m high and the turn table was at 330 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.41GHz

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2410.000	0.12	6.22	85.32	85.44	-28.56	114.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2410.000	0.05	6.20	83.48	83.53	-10.47	94.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.41GHz

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2410.000	0.12	6.22	89.47	89.59	-24.41	114.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	DBμV	dBμV/m	dBμV/m	dBμV/m	
2410.000	0.05	6.20	81.47	81.52	-12.48	94.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamp Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.44GHz


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2440.000	0.12	6.22	75.82	75.94	-38.06	114.00	Peak

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2440.000	0.19	6.25	69.01	69.20	-24.80	94.00	Average

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.44GHz

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2440.000	0.12	6.22	71.34	71.46	-42.54	114.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2440.000	0.19	6.25	68.11	68.30	-25.70	94.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.47GHz


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2470.000	0.33	6.30	80.08	80.41	-33.59	114.00	Peak

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Horizontal	Horizontal	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2470.000	0.29	6.30	78.31	78.60	-15.40	94.00	Average

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Probe Factor + Meter Reading +Cable Loss-Preamplifier Factor
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :



Date of Test :	Feb.15, 2006	Temperature :	22°C
EUT :	PSII Lava Glow	Humidity :	50%
Model No. :	DGPN-551A	Test Mode :	TX
Test Engineer:	Jack	Memo :	CH 2.47GHz

Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2470.000	0.33	6.30	79.25	79.58	-34.42	114.00	Peak

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.


Frequency	Probe	Cable	Meter Reading	Emission Level	Over	Limits	Remark
	Factor	Loss	Vertical	Vertical	Limits		
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2470.000	0.29	6.30	79.25	79.54	-14.46	94.00	Average

Remark: 1. All readings are Average and Peak values.

2. Emission Level = Antenna Factor + Meter Reading +Cable Loss-Preamplifier Factor

3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :




AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 42 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:31:26

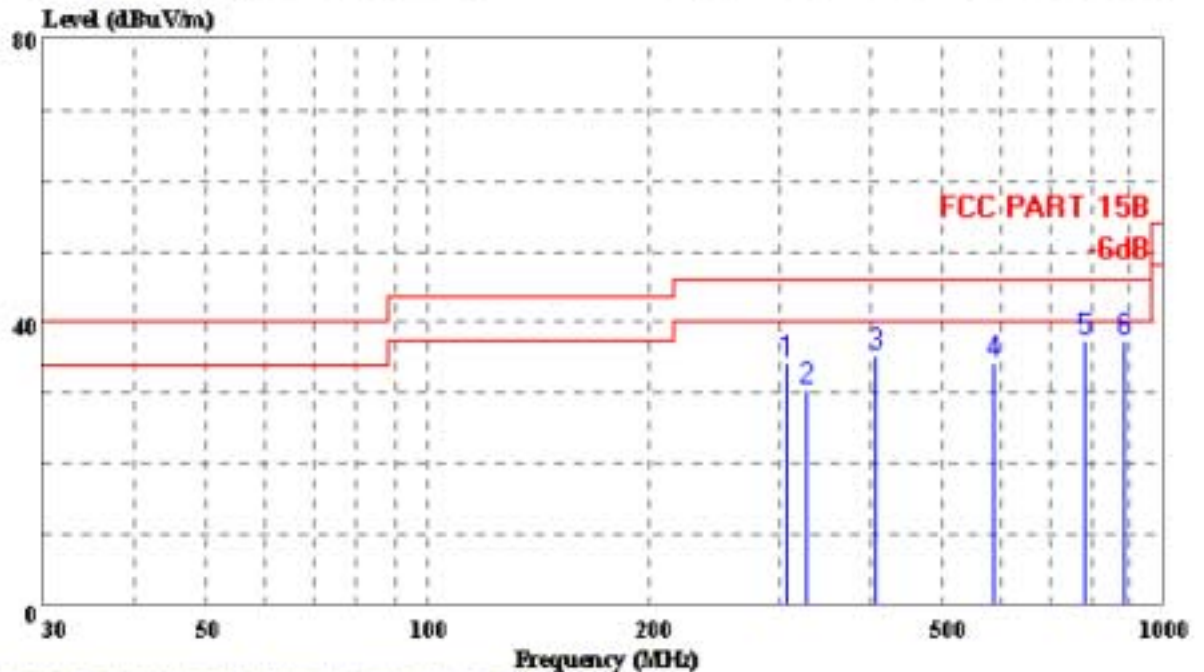

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.41GHz
: H:1.5m Deg:50'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBUV	dB	dB
1	308.390	34.44	46.00	-11.56	17.01	13.41	4.02
2	325.850	30.65	46.00	-15.35	12.17	14.32	4.16
3	407.330	35.34	46.00	-10.66	14.22	16.45	4.67
4	589.690	34.36	46.00	-11.64	9.80	18.72	5.84
5	778.840	37.55	46.00	-8.45	9.59	21.31	6.65
6	882.630	37.23	46.00	-8.77	7.81	22.05	7.37

AUDIX®
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 41 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:30:32

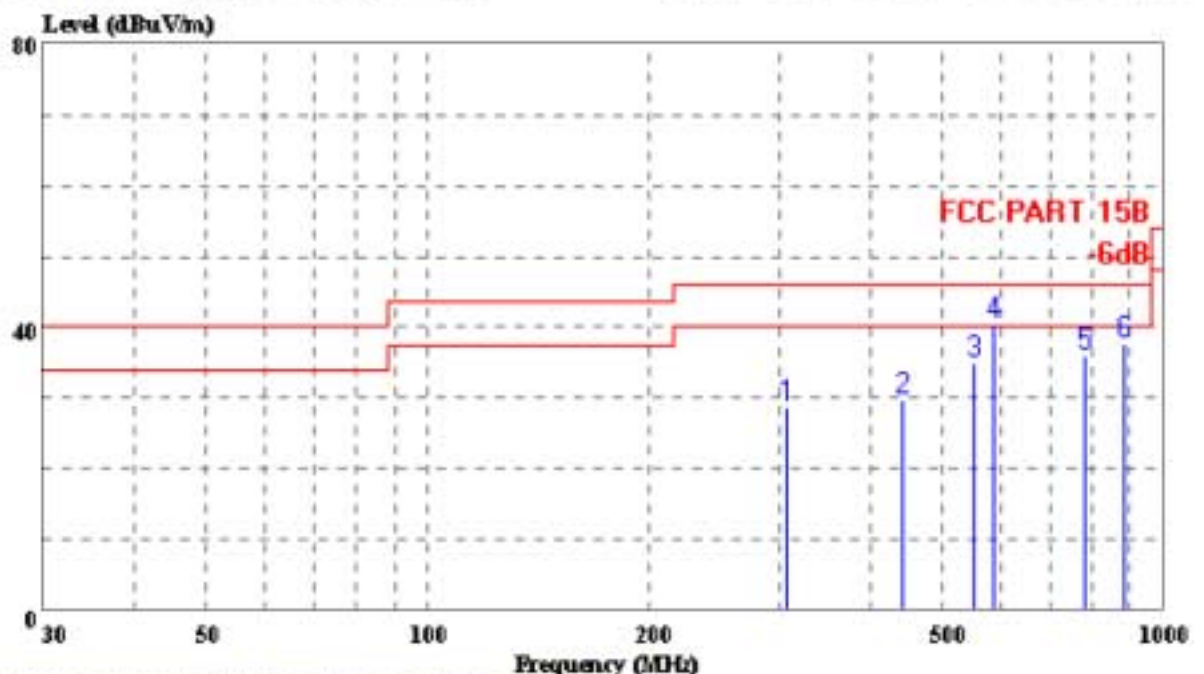

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.41GHz
: H:1.8m Deg:330'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBUV	dB	dB
1	306.450	28.86	46.00	-17.14	12.04	12.81	4.01
2	441.280	29.79	46.00	-16.21	8.74	16.32	4.73
3	552.830	34.94	46.00	-11.06	9.87	19.49	5.58
4	589.690	40.68	46.00	-5.32	15.91	18.93	5.84
5	778.840	35.99	46.00	-10.01	8.19	21.15	6.65
6	882.630	37.86	46.00	-8.14	8.23	22.26	7.37

AUDIX®
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 40 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:29:44

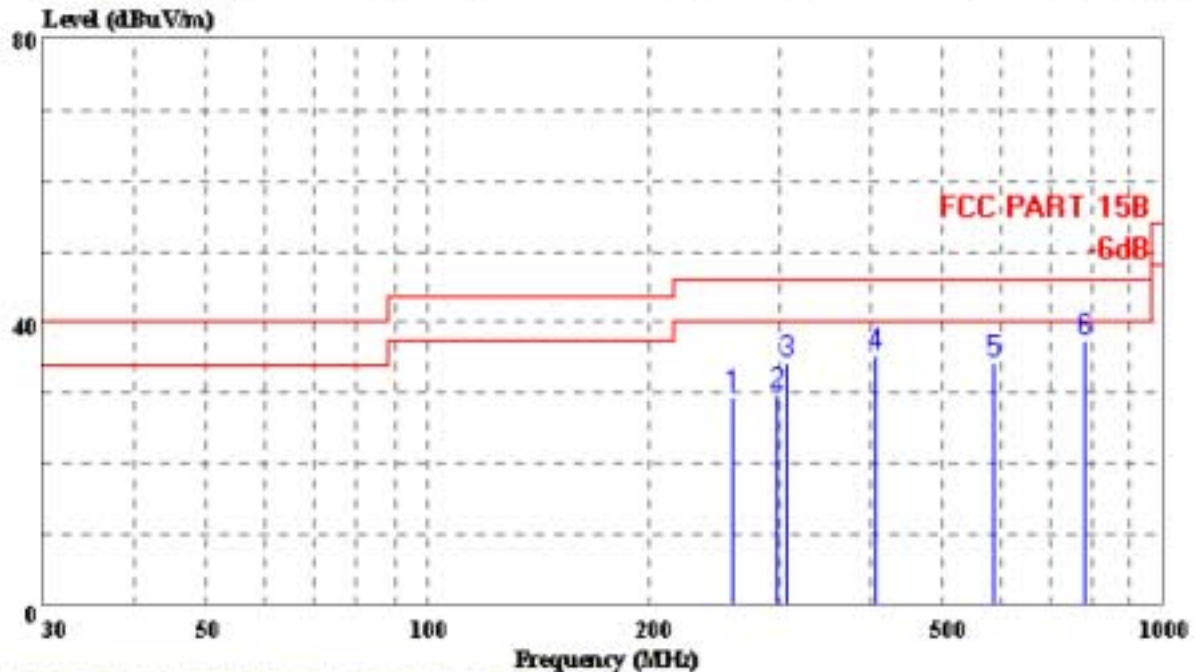

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.44GHz
: H:1.5m Deg:50'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBUV	dB	dB
1	259.890	29.59	46.00	-16.41	12.78	13.13	3.68
2	297.720	29.94	46.00	-16.06	12.77	13.28	3.88
3	308.390	34.44	46.00	-11.56	17.01	13.41	4.02
4	407.330	35.34	46.00	-10.66	14.22	16.45	4.67
5	589.690	34.36	46.00	-11.64	9.80	18.72	5.84
6	778.840	37.55	46.00	-8.45	9.59	21.31	6.65

AUDIX®
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 39 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:28:52

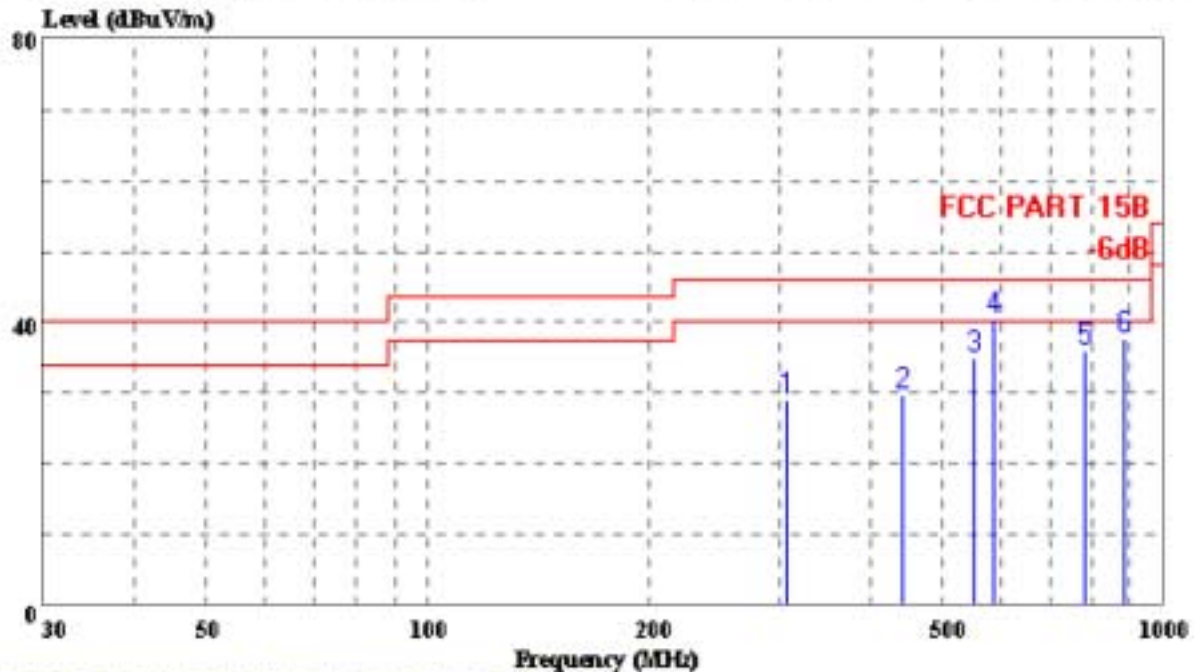

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.44GHz
: H:1.8m Deg:330'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBUV	dB	dB
1	307.420	28.94	46.00	-17.06	12.14	12.79	4.01
2	441.280	29.79	46.00	-16.21	8.74	16.32	4.73
3	552.830	34.94	46.00	-11.06	9.87	19.49	5.58
4	589.690	40.68	46.00	-5.32	15.91	18.93	5.84
5	778.840	35.99	46.00	-10.01	8.19	21.15	6.65
6	882.630	37.86	46.00	-8.14	8.23	22.26	7.37

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 44 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:33:07

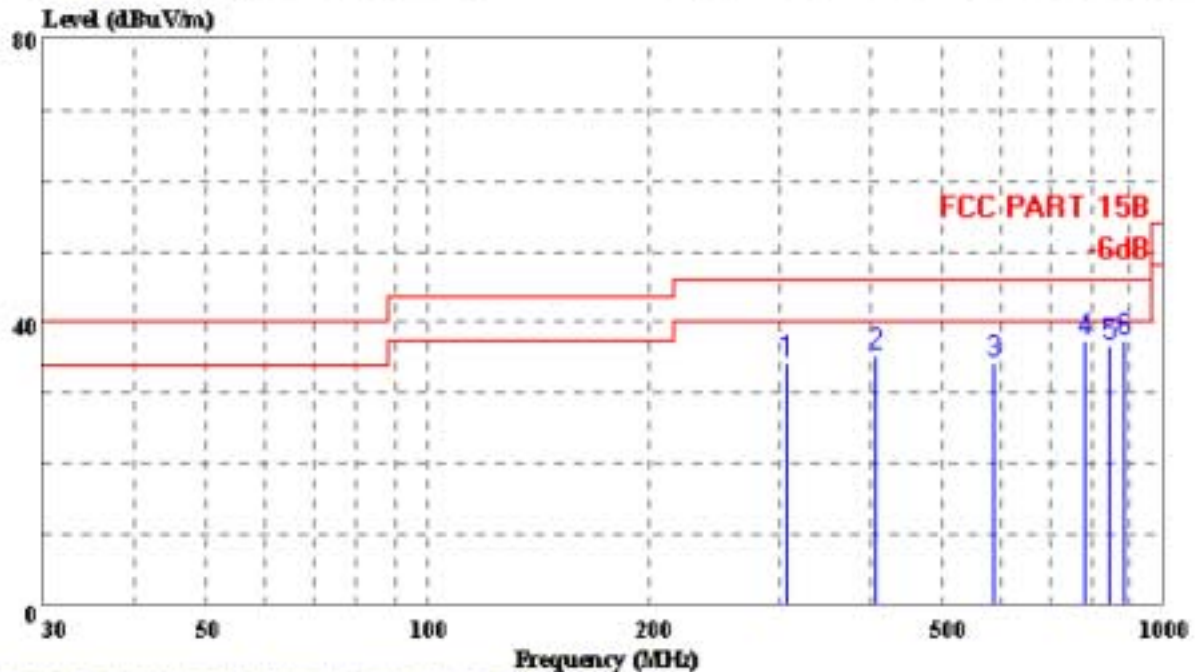

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.47GHz
: H:1.5m Deg:50'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBuV	dB	dB
1	308.390	34.44	46.00	-11.56	17.01	13.41	4.02
2	407.330	35.34	46.00	-10.66	14.22	16.45	4.67
3	589.690	34.36	46.00	-11.64	9.80	18.72	5.84
4	778.840	37.55	46.00	-8.45	9.59	21.31	6.65
5	843.830	36.73	46.00	-9.27	7.74	22.08	6.91
6	882.630	37.23	46.00	-8.77	7.81	22.05	7.37

AUDIX[®]
AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

NO.6, Ke Feng Road, Block 52
Shenzhen Science & Industry Park,
Guangdong, China
Tel: +86-755-26639495-7

Data#: 43 File#: ACS6Q067.EMI

Date: 2006-02-16 Time: 18:32:16

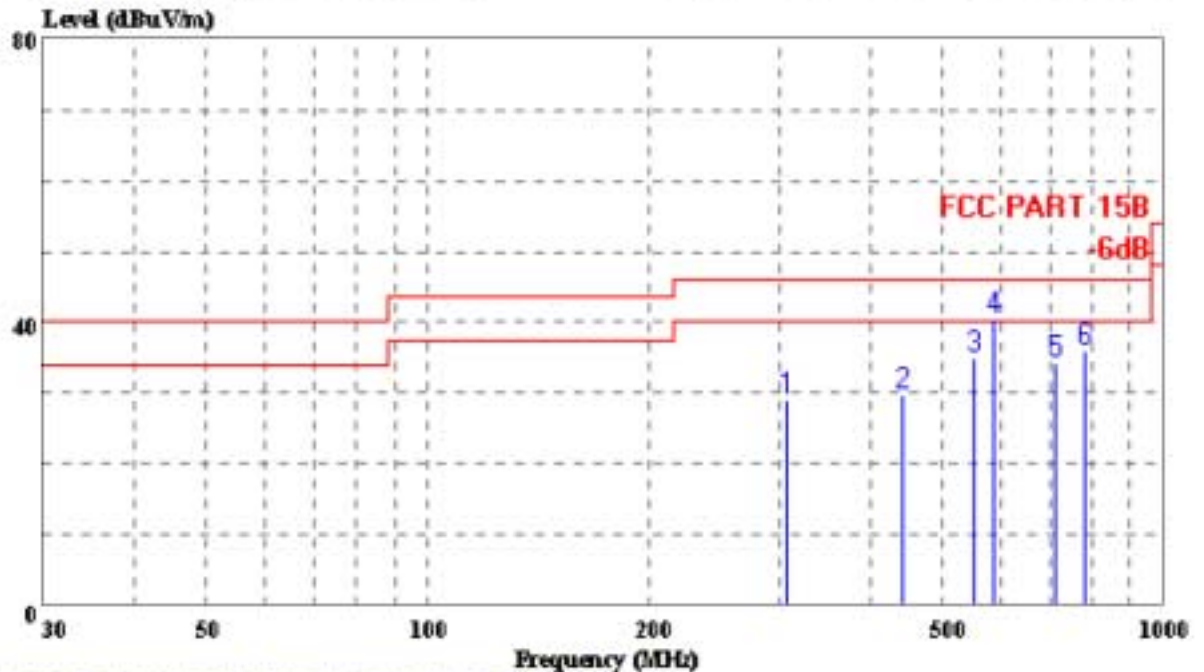

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.47GHz
: H:1.8m Deg:330'

Page: 1


	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBUV/m	Line	Limit	Level	Factor	Loss
			dBUV/m	dB	dBUV	dB	dB
1	307.420	28.94	46.00	-17.06	12.14	12.79	4.01
2	441.280	29.79	46.00	-16.21	8.74	16.32	4.73
3	552.830	34.94	46.00	-11.06	9.87	19.49	5.58
4	589.690	40.68	46.00	-5.32	15.91	18.93	5.84
5	710.940	34.13	46.00	-11.87	6.62	21.01	6.50
6	778.840	35.99	46.00	-10.01	8.19	21.15	6.65



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 21

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

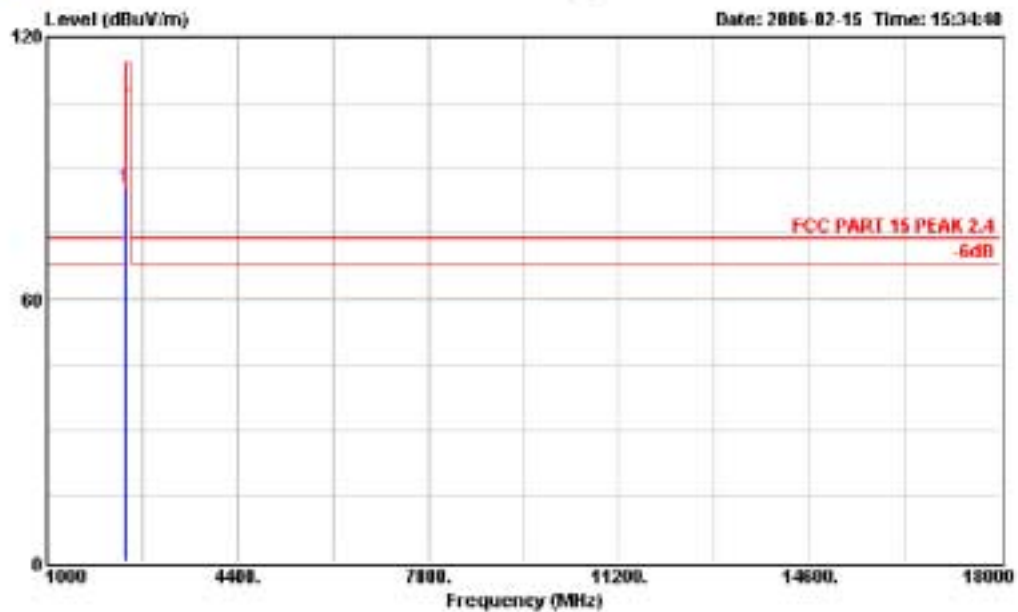

Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.41 GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2410.100	85.44	-28.56	114.00	85.32	6.22	0.12	Peak



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 22

File#: D:\EMI TEST DATA\EME core2\ACS6Q067.EMI

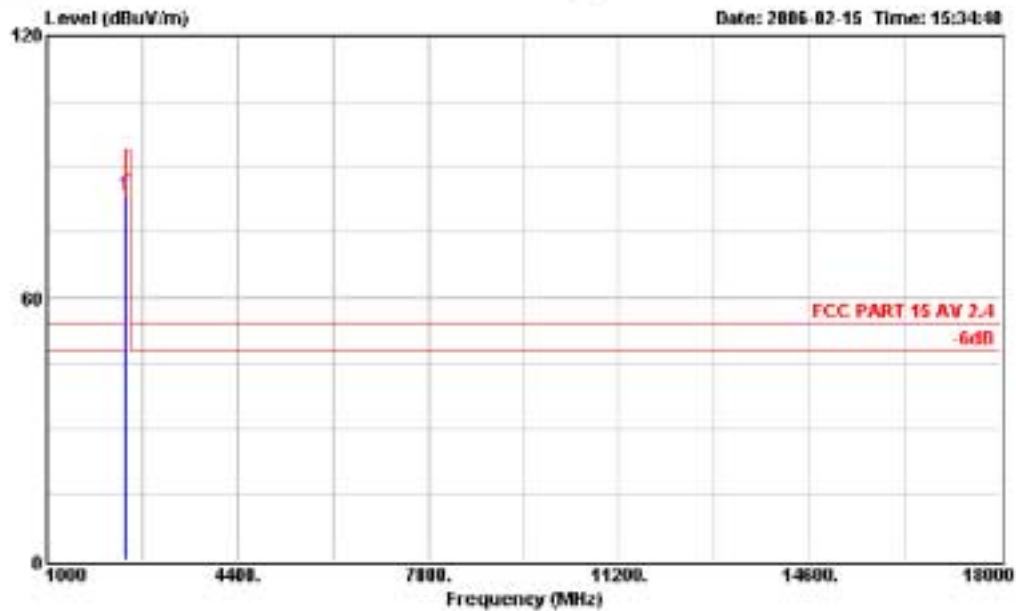

Site : site
Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
EUT : PSII Lara Glow
M/N : DGPV-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer : Jack
OP Condition : TX
Comment : Temp:22' Humi:50%
Memo : CH 2.41 GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2410.100	83.53	-10.47	94.00	83.43	6.20	0.05	Average



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 23

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

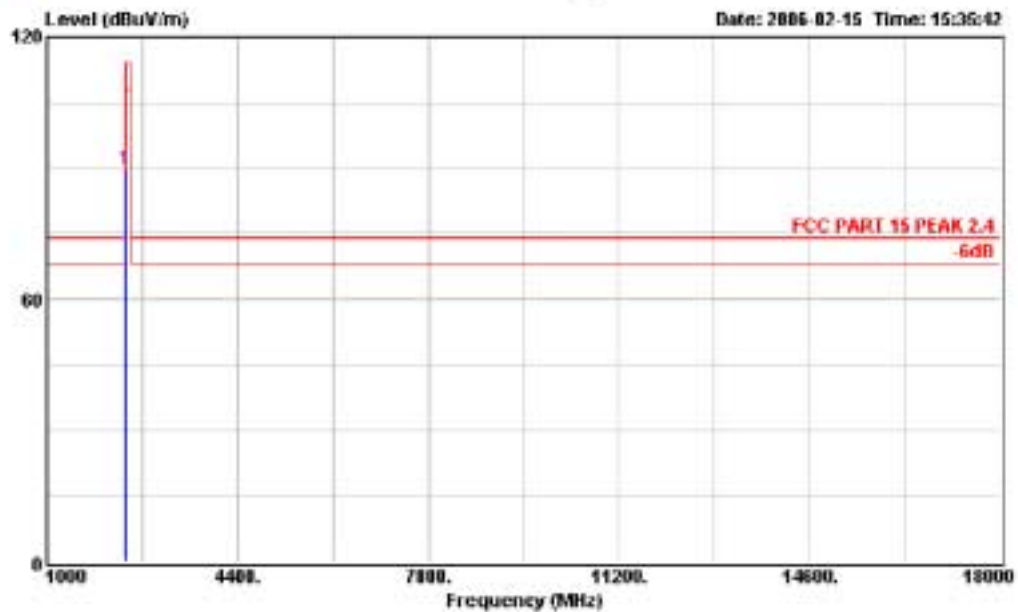

Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.41 GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2410.000	89.59	-24.41	114.00	89.47	6.22	0.12	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 24

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

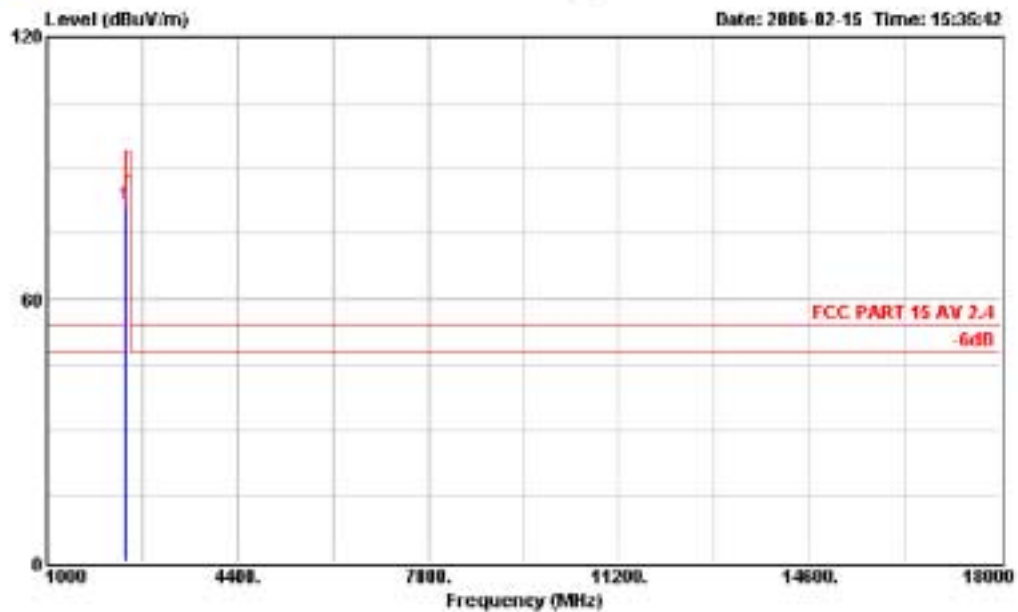

Site : site
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lora Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.41 GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2410.000	81.52	-12.48	94.00	81.47	6.20	0.05	Average



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 19

File#: D:\EMI TEST DATA\EME core2\ACS6Q067.EMI

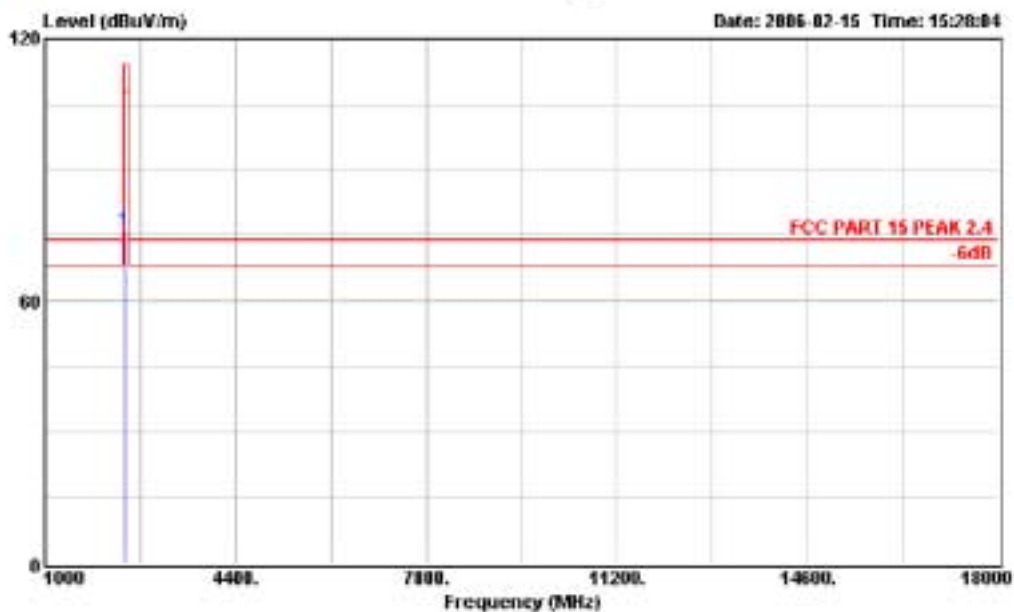

Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lara Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.44GHz


Freq	Level	Over		Limit		Read		Cable	Factor	Remark
		dB	dBuV/m	dB	dBuV/m	dBuV	dB			
1	2440.000	75.94	-38.06	114.00	75.82	6.22	0.12			Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 20

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

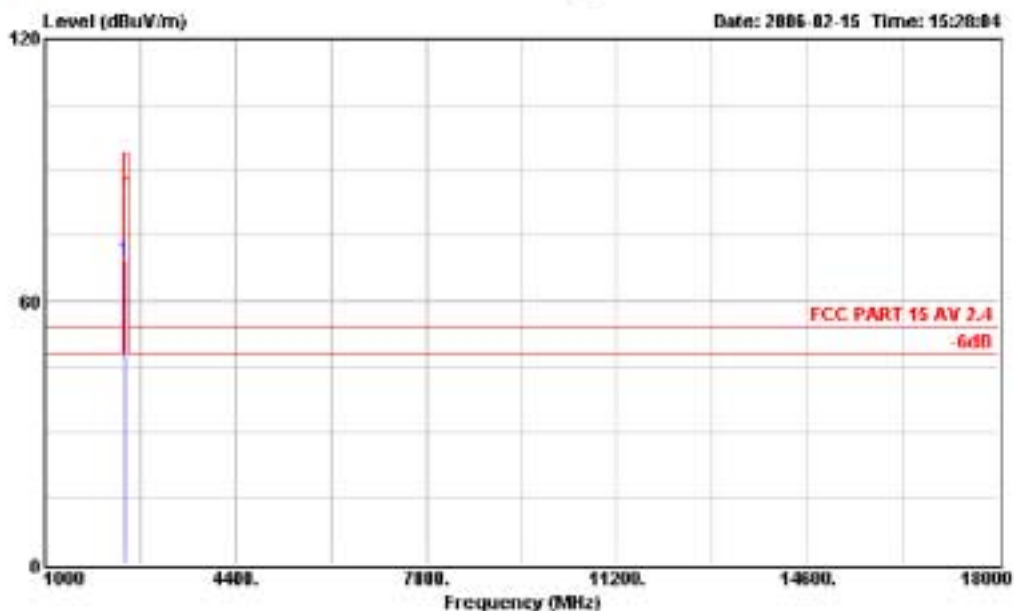

Site : site
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.44GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2440.000	69.20	-24.80	94.00	69.01	6.25	0.19	Average



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 17

File#: D:\EMI TEST DATA\EME core2\ACS6Q067.EMI

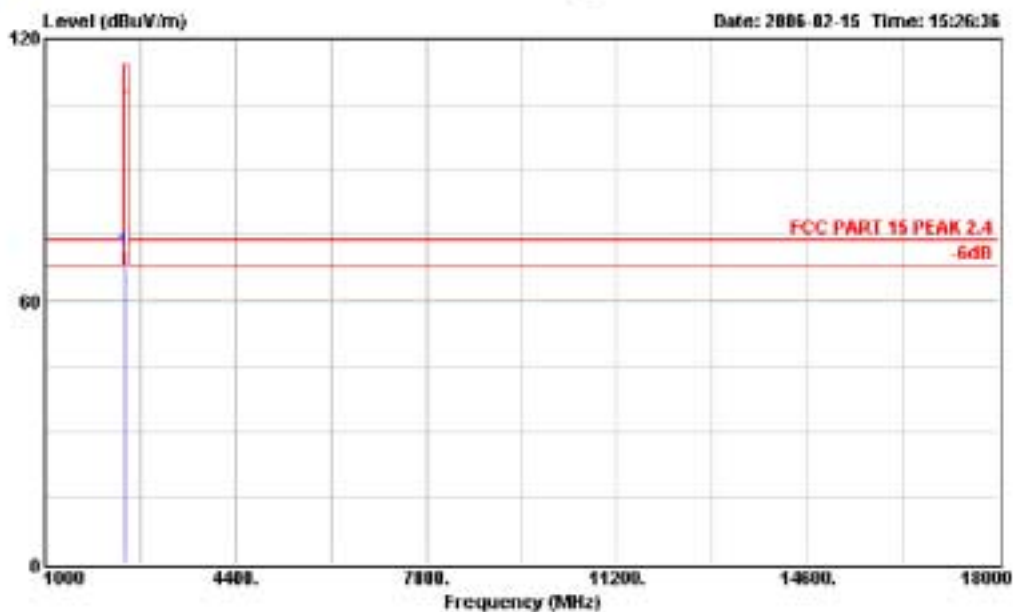

Site : site
Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
EUT : PSII Lara Glow
M/N : DGPV-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer : Jack
OP Condition : TX
Comment : Temp:22' Humi:50%
Memo : CH 2.44GHz


Freq	Level	Over	Limit	Read	Cable	Factor	Remark
		Limit	Line	Level	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2440.000	71.46	-42.64	114.00	71.34	6.22	0.12 Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel:+86-0755-26639495-7
 Fax:+86-0755-26632877
<http://www.audix.com.cn>

Data#: 18

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

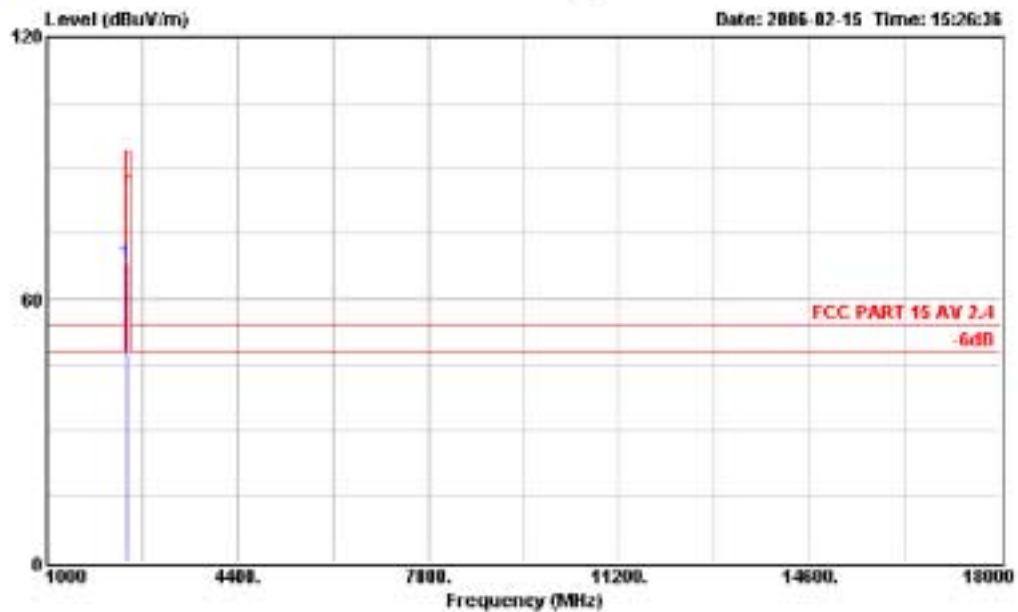

Site : site
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humi:50%
 Memo : CH 2.44GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2440.000	68.30	-25.70	94.00	68.11	6.25	0.19	Average



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 27

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

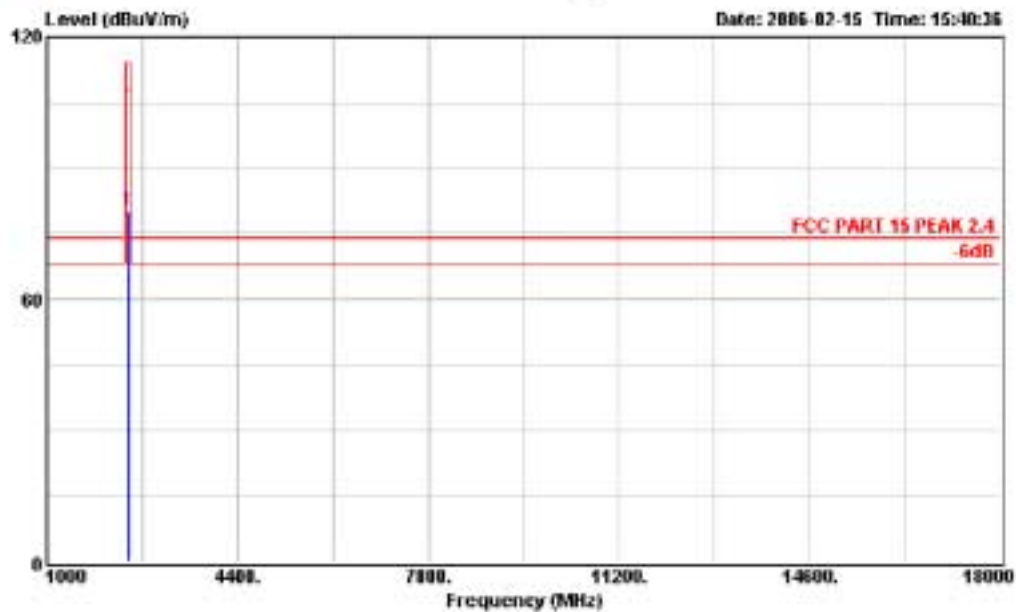

Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2470.000	80.41	-33.59	114.00	80.03	6.30	0.33	Peak



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 28

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

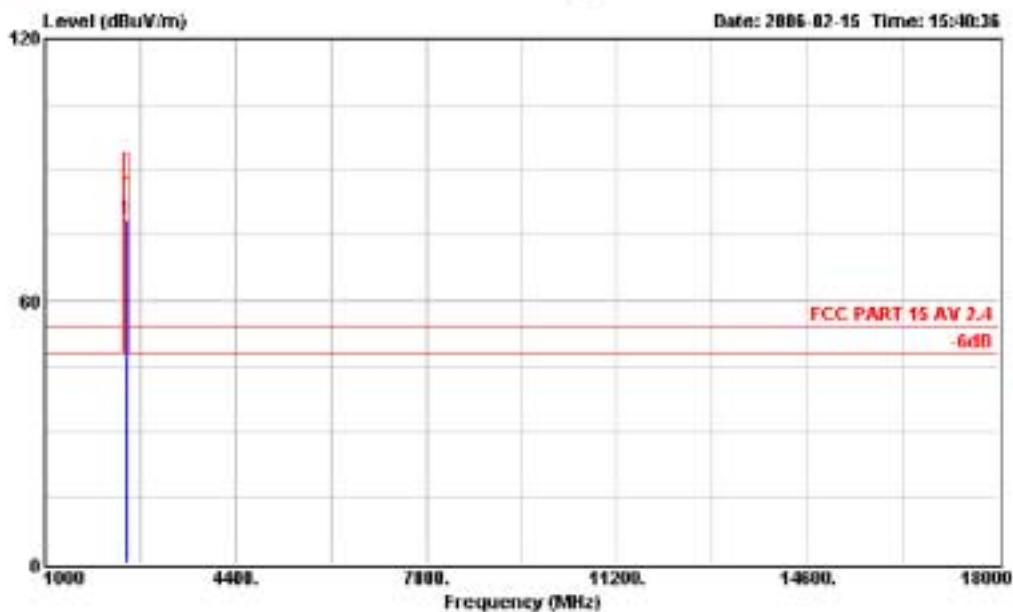

Site : site
Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR HORIZONTAL
EUT : PSII Lara Glow
M/N : DGPV-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer : Jack
OP Condition : TX
Comment : Temp:22' Humi:50%
Memo : CH 2.47GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2470.000	78.60	-15.40	94.00	78.31	6.30	0.29	Average



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 25

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

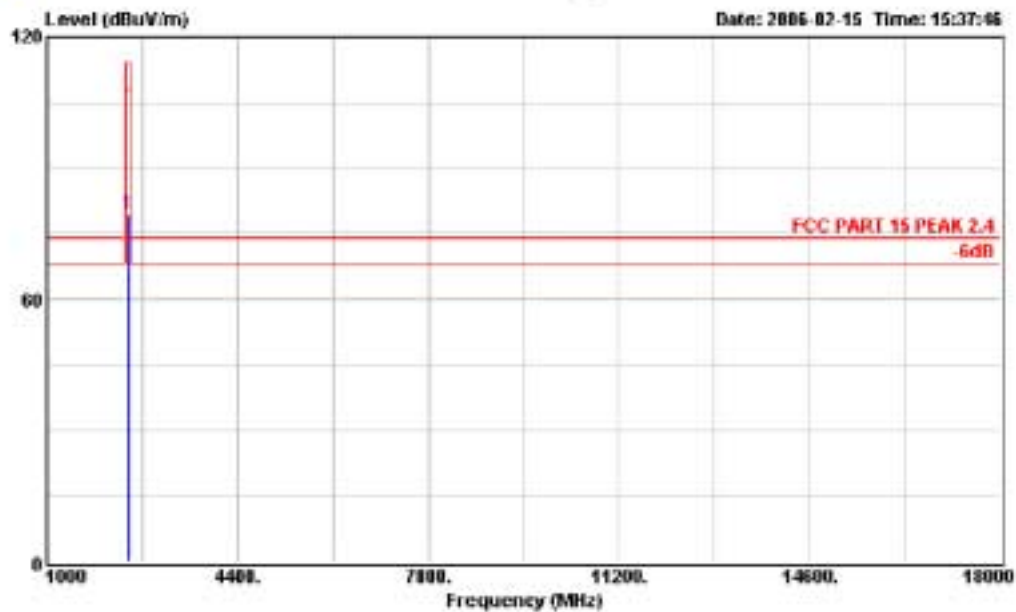

Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz


	Freq	Level	Over	Limit	Read	Cable	Factor	Remark
			Limit	Line	Level	Loss		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2470.000	79.58	-34.42	114.00	79.25	6.30	0.33	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 26

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

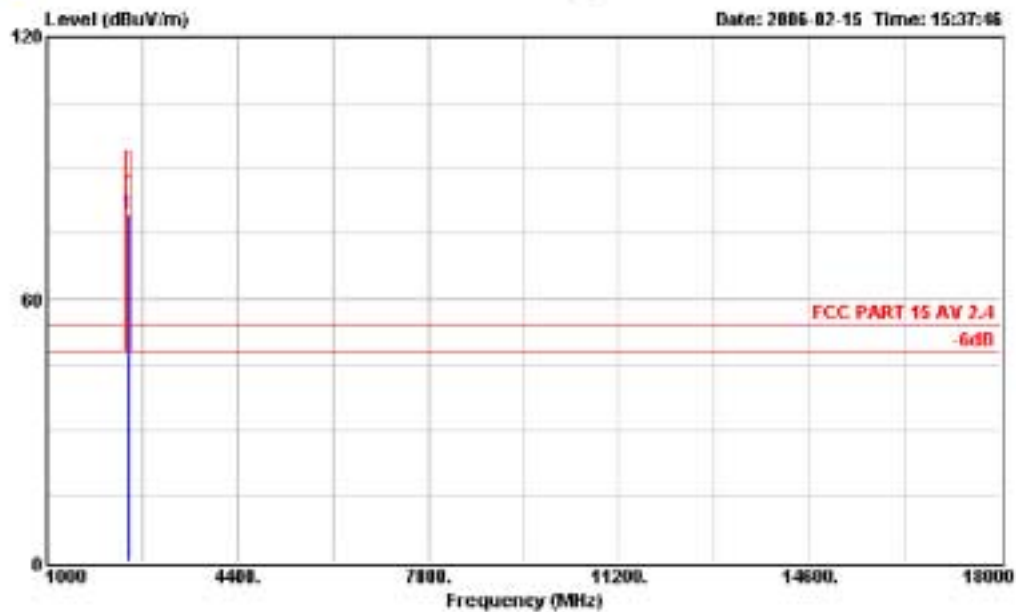

Site : site
 Condition : FCC PART 15 AV 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lora Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz

	Freq	Level	Over	Limit	Read	Cable		
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	2470.000	79.54	-14.46	94.00	79.25	6.30	0.29	Average


4. BAND EDGES MEASUREMENT

4.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 23, 05	1 Year
2.	Amp	HP	8449B	3008A00863	May 23, 05	1 Year
3.	Antenna	EMCO	3115	9607-4877	Dec. 14, 05	1.5 Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May 23, 05	1 Year

4.2. Block Diagram of Test Setup

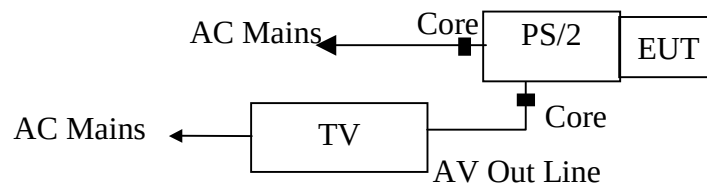

(EUT: PSII Lava Glow)

4.3. Test Standard

The test completeness FCC 15C (249).

4.4. Bandwidth Limit

200kHz wide centered on the operation frequency.

4.5. Test Procedure

PASS.


The testing data was attached in the next pages.



Audix Technology (Shenzhen) Co., Ltd.
Shenzhen Science & Ind. Park
Tel: +86-0755-26639495-7
Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 16

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

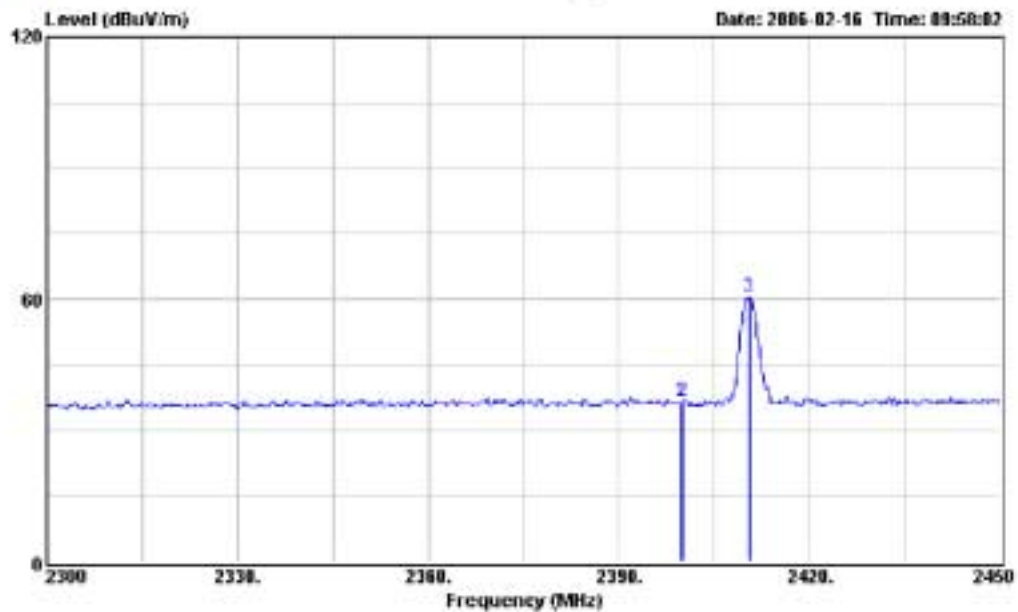

Site : site
Condition : 3m 3115 FACTOR HORIZONTAL
EUT : PSII Lora Glow
M/N : DGPV-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer : Jack
OP Condition : TX
Comment : Temp:22' Humi:50%
Memo : CH 2.41 GHz


	Freq	Level	Over	Limit	Read	Cable		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2399.900	36.71	-----	-----	36.70	6.20	0.01	Peak
2	2400.000	36.71	-----	-----	36.70	6.20	0.01	Peak
3	2410.550	60.37	-----	-----	60.32	6.20	0.05	Peak



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 14

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

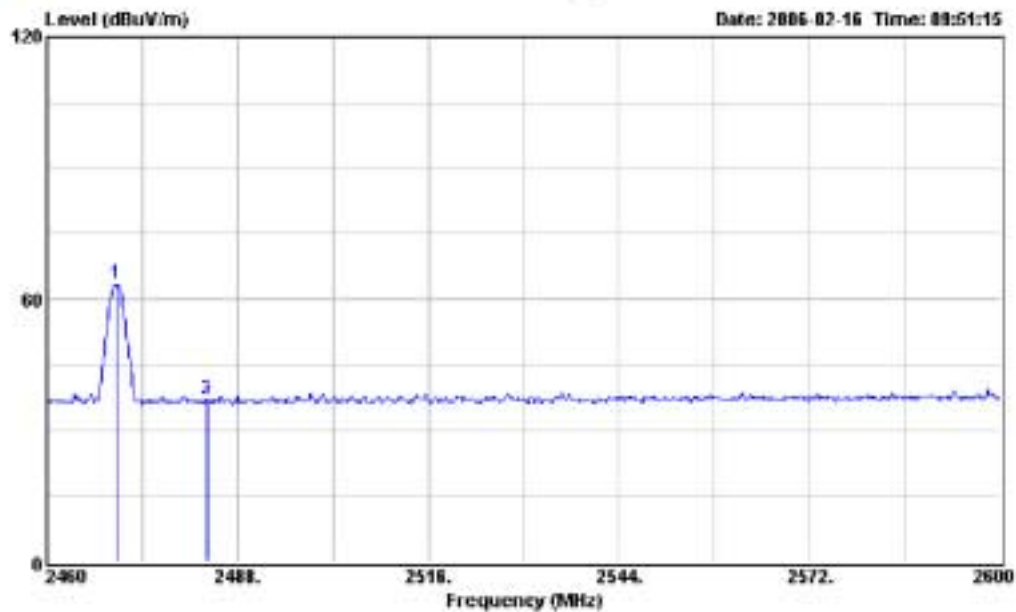

Site : site
 Condition : 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lora Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz

	Freq	Level	Over	Limit	Read	Cable		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2470.360	63.33	-----	-----	63.04	6.30	0.29	Peak
2	2483.500	37.16	-----	-----	36.83	6.30	0.33	Peak
3	2483.600	37.16	-----	-----	36.83	6.30	0.33	Peak

5. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 8 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:28:43

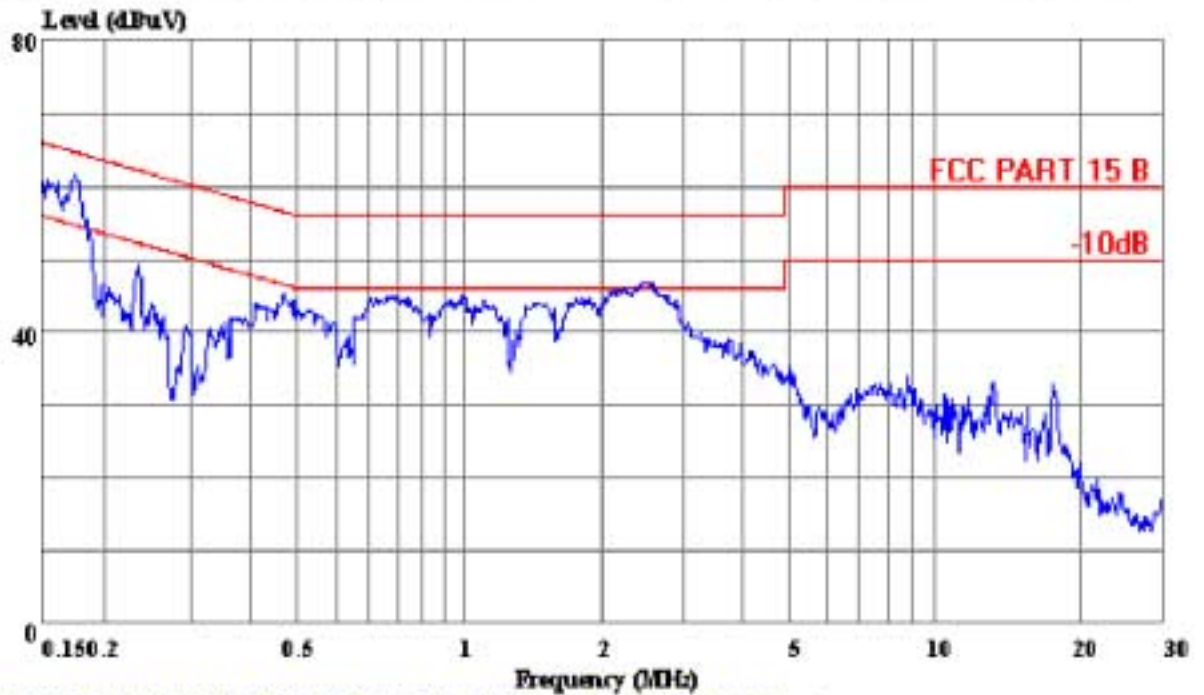

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.41GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 7 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:28:38

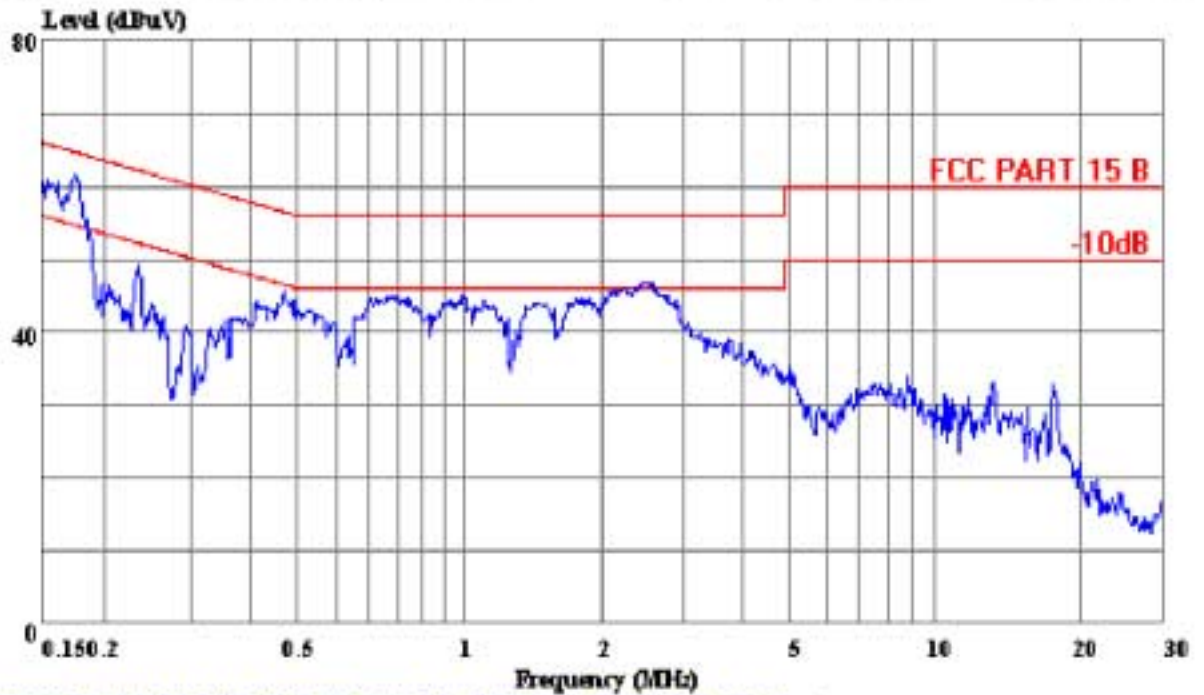

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.41GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 15 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:33:22

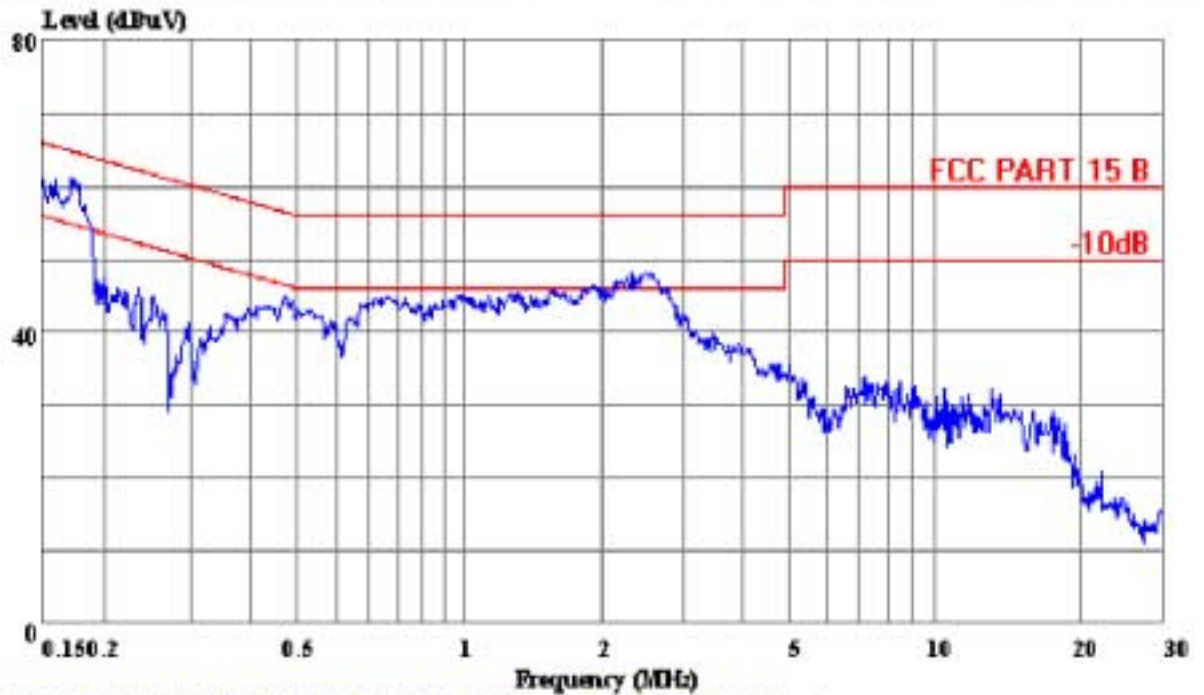

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KMW-407
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.44GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 17 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:35:50

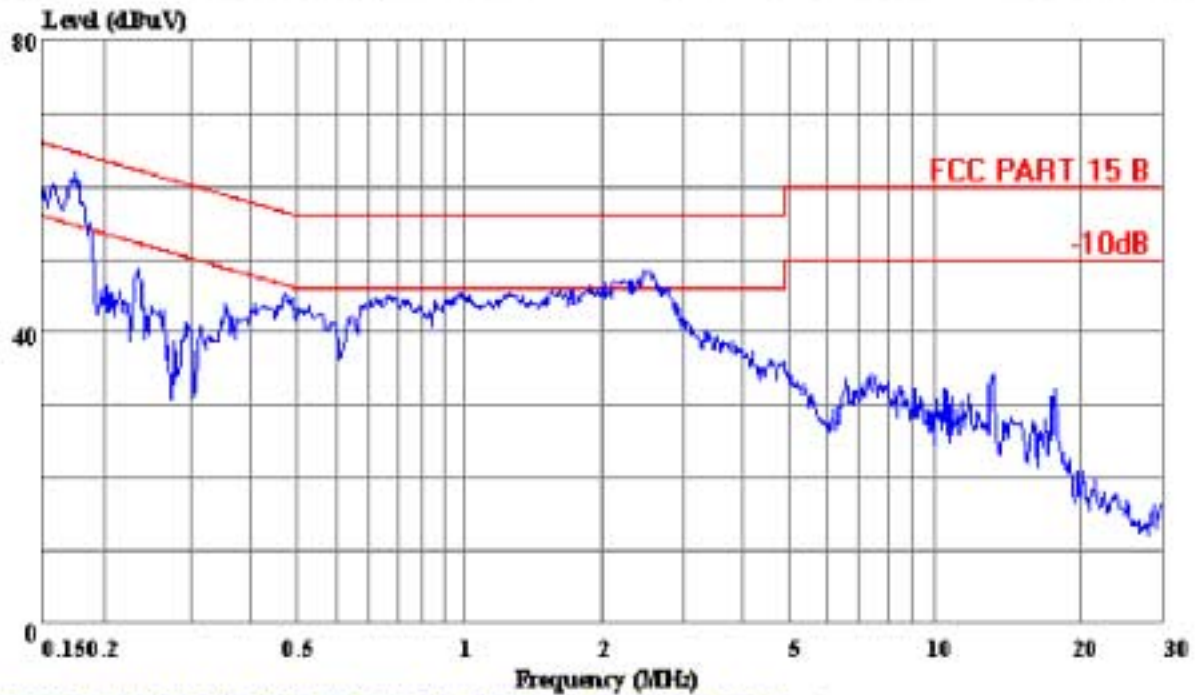

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407
 EUT : PSII Lava Glow
 M/N : DGPB-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.44GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 3 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:22:49

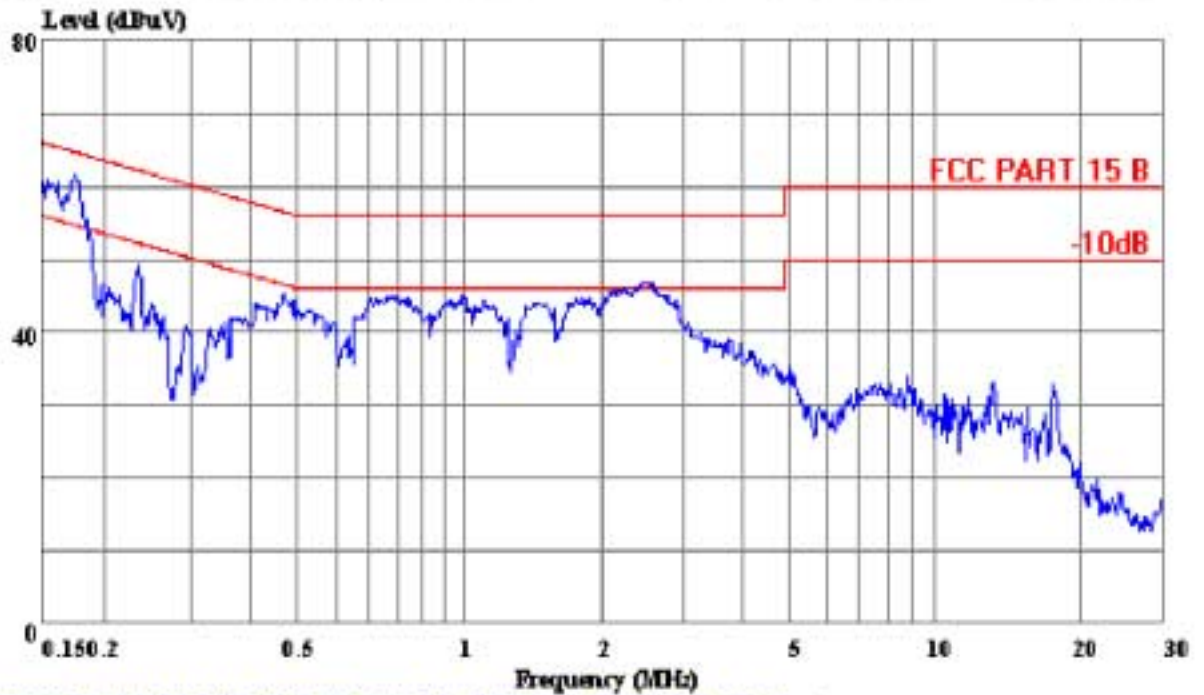

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.47GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

No.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park,

Data#: 5 File#: ACS6Q067-2.EMI

Date: 2006-02-15 Time: 21:25:19

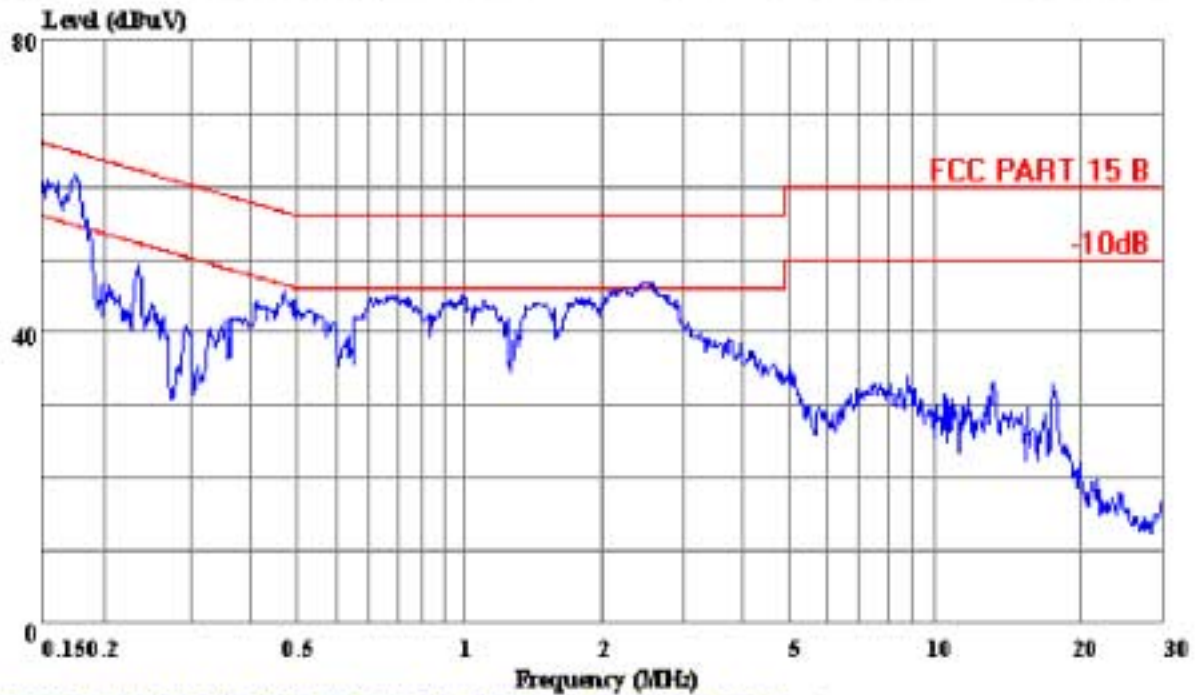

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix No.1 Conduction)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 OP Condition : TX
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: Qiyuang
 Comment : Temp:23' Humi:54%
 Memo : CH 2.47GHz

APPENDIX II




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: 14 File#: ACS6Q067.EMI

Date: 2006-02-14 Time: 23:00:59

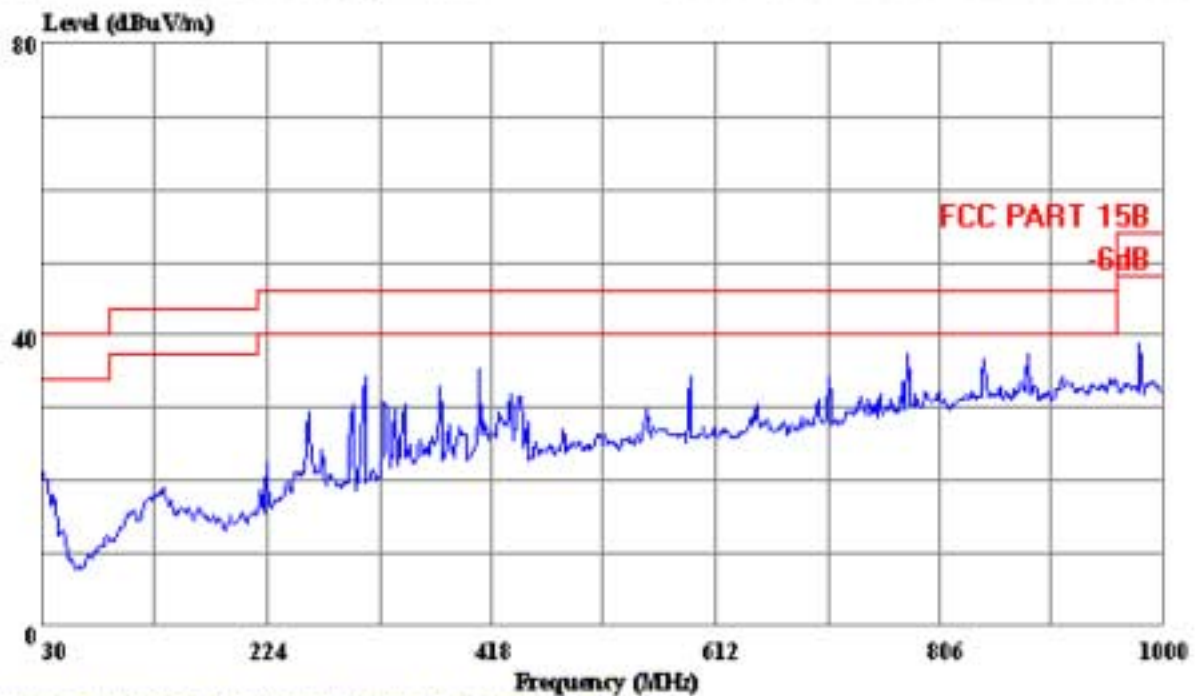

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: MARIO
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : CH 2.41GHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 13 File#: ACS6Q067.EMI

Date: 2006-02-14 Time: 22:58:34

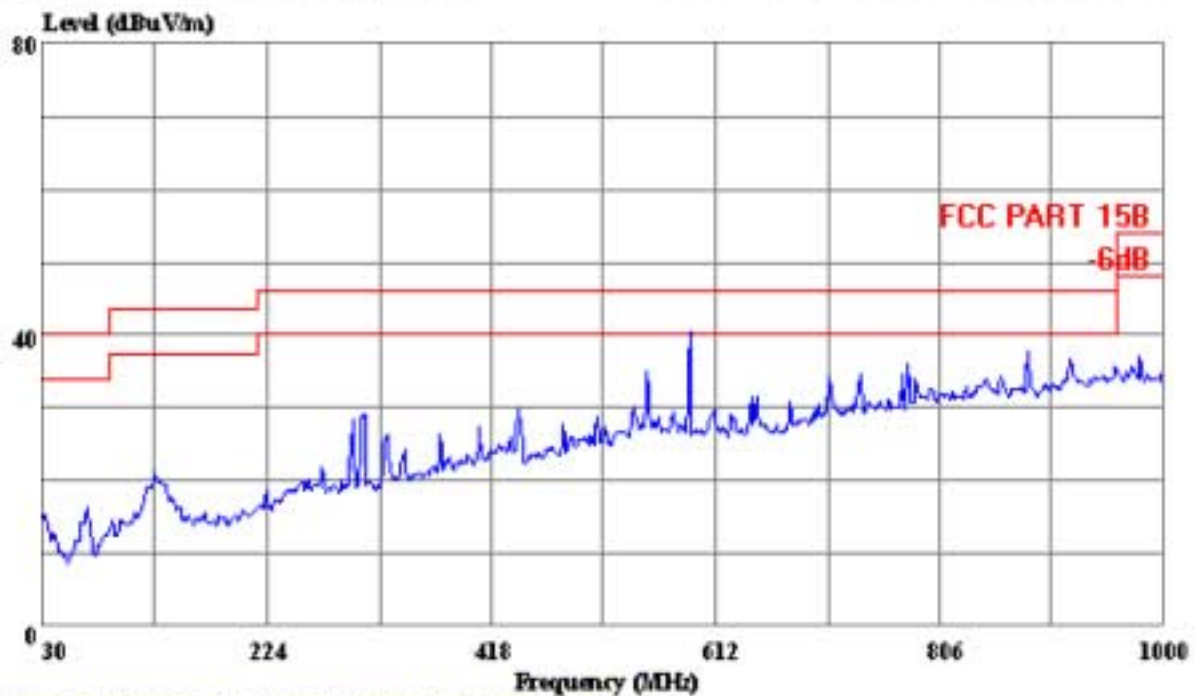

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: MARIO
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : CH 2.41GHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 2 File#: ACS6Q067.EMI

Date: 2006-02-14 Time: 22:22:43

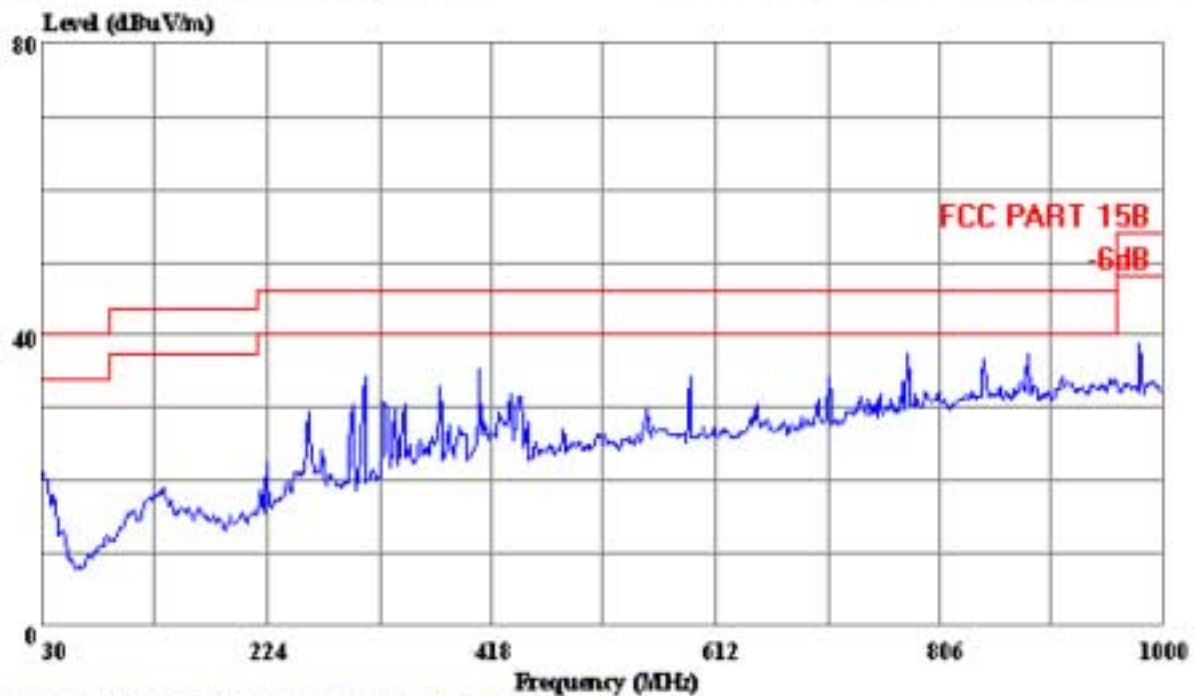

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR HORIZONTAL
EUT : PSII Lava Glow
M/N : DGPN-551A
Test Spec : DC 5V From PS2 Input AC 120V/60Hz
Test Engineer: MARIO
OP Condition : TX
Comment : Temp:23' Humi:54%
Memo : CH 2.44GHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 1 File#: ACS6Q067.EMI

Date: 2006-02-14 Time: 22:21:05

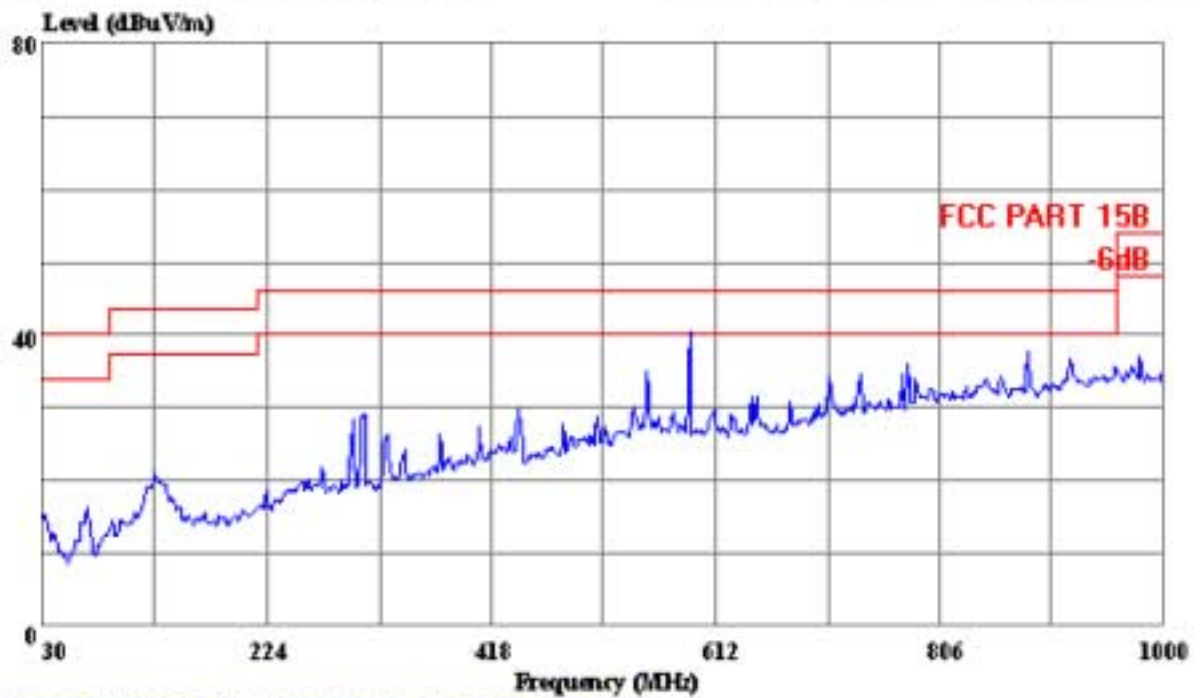

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: MARIO
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : CH 2.44GHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 26 File#: ACS6Q067.EMI

Date: 2006-02-15 Time: 01:00:59

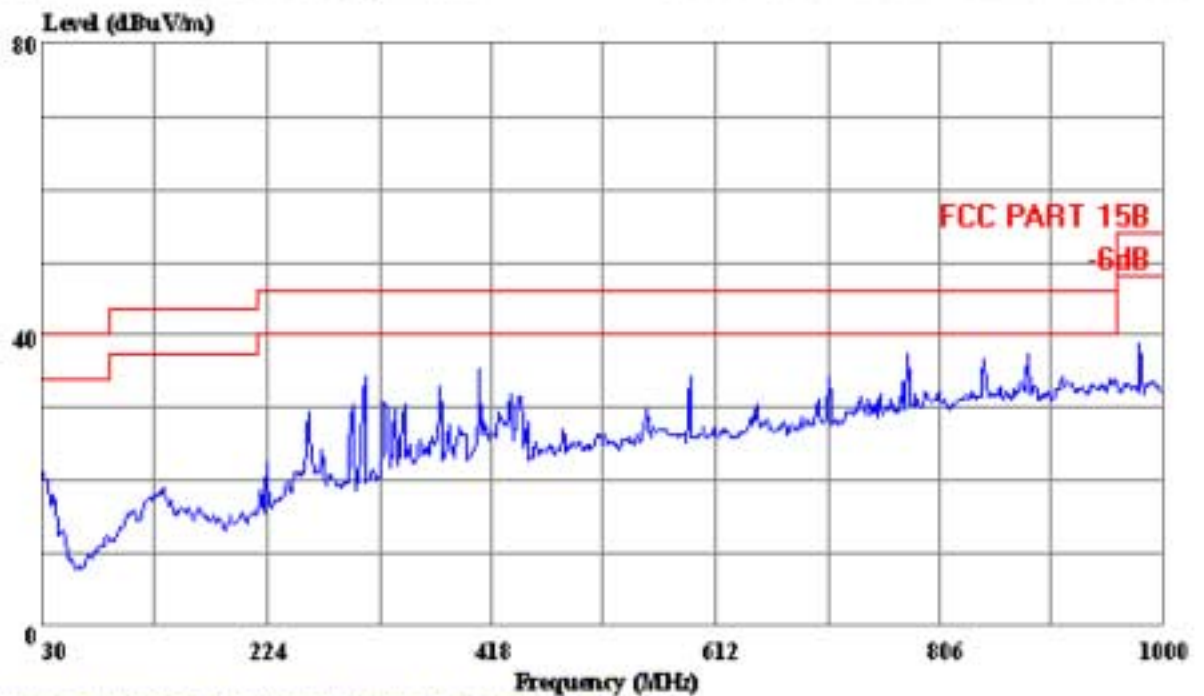

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: MARIO
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : CH 2.47GHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 25 File#: ACS6Q067.EMI

Date: 2006-02-15 Time: 00:57:34

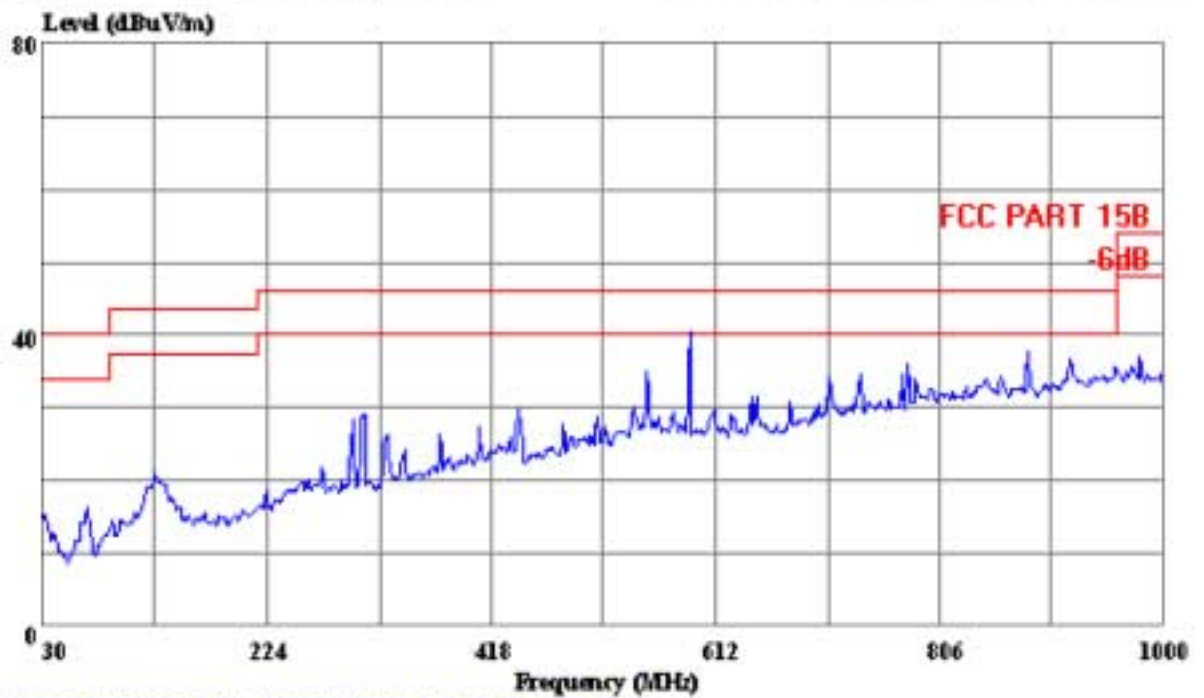

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:


Ref Trace:

Condition: FCC PART 15B 3m 2597FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPN-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer: MARIO
 OP Condition : TX
 Comment : Temp:23' Humi:54%
 Memo : CH 2.47GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 3 File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

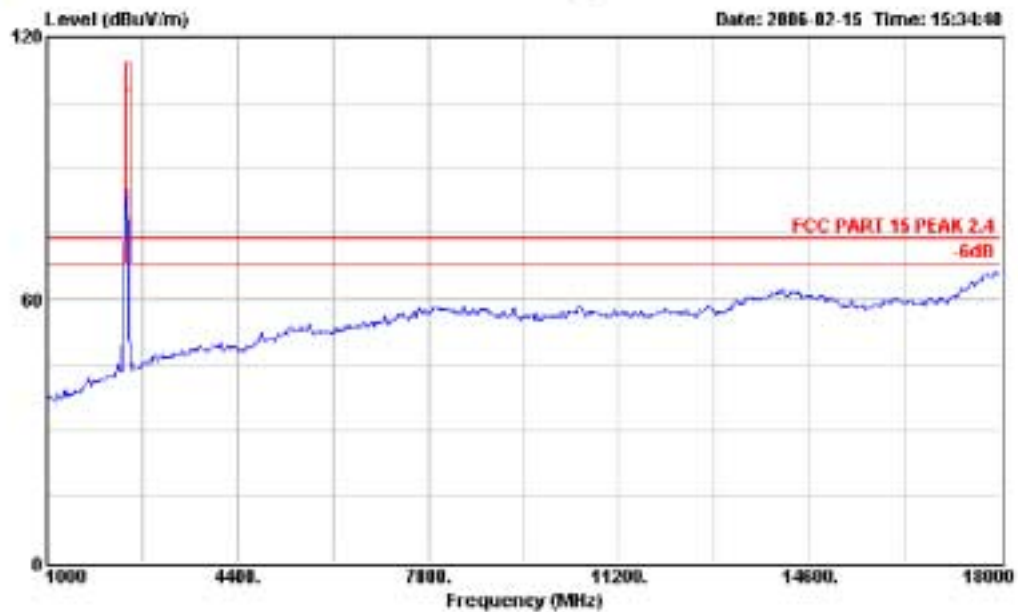


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.41 GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 4

File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

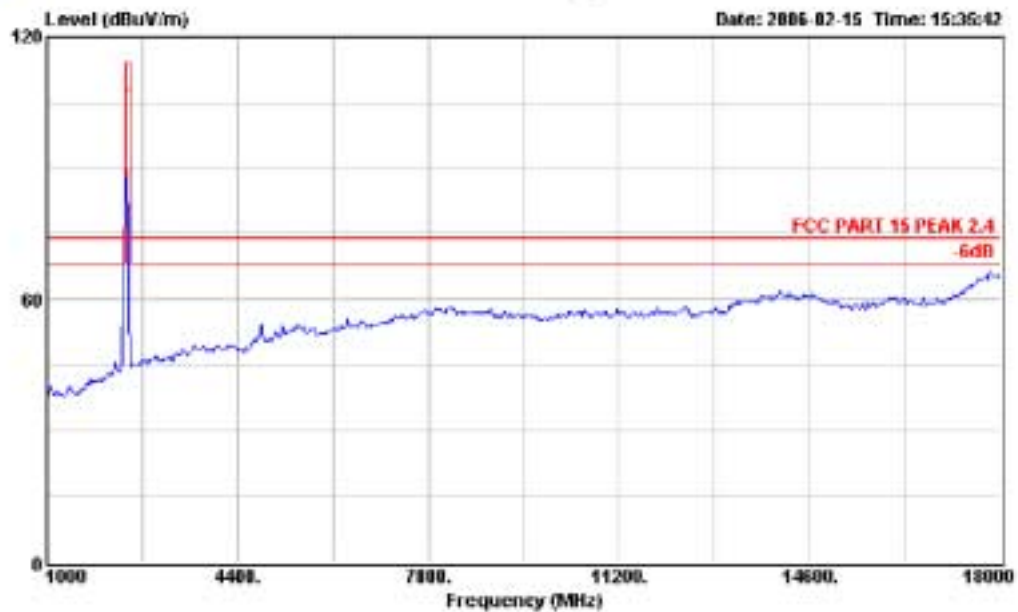


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humi:50%
 Memo : CH 2.41 GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 2 File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

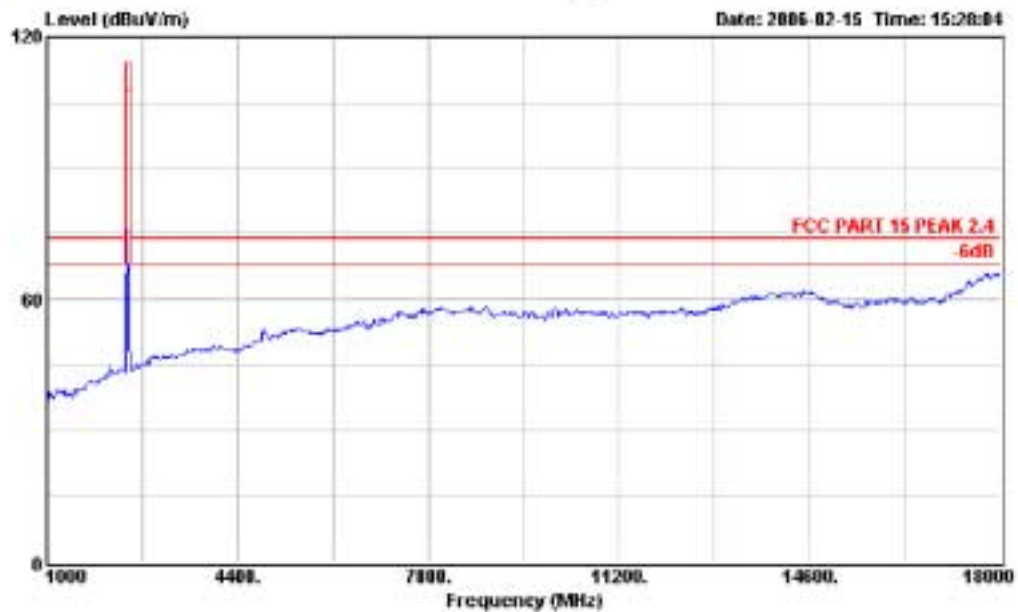


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.4GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 1 File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

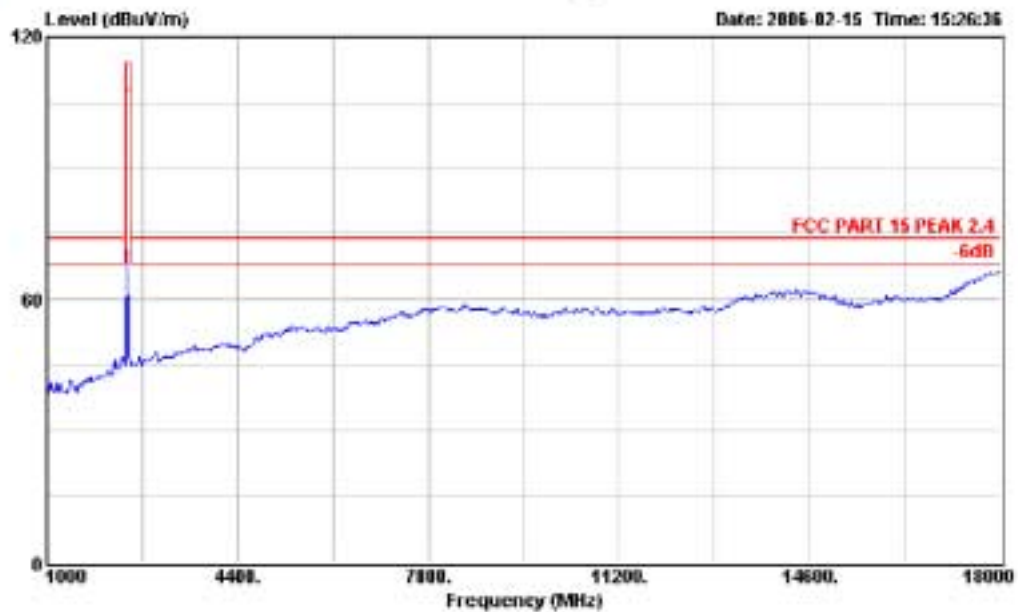


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.44GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 6 File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

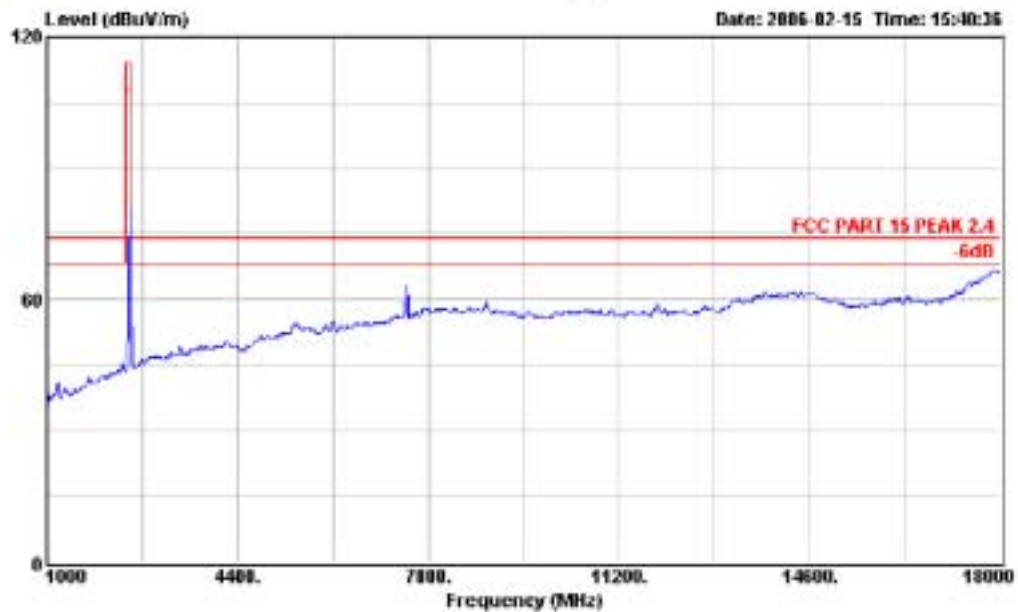


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz



Audix Technology (Shenzhen) Co., Ltd.
 Shenzhen Science & Ind. Park
 Tel: +86-0755-26639495-7
 Fax: +86-0755-26632877
<http://www.audix.com.cn>

Data#: 5 File#: D:\EMI TEST DATA\EE core2\ACS6Q067.EMI

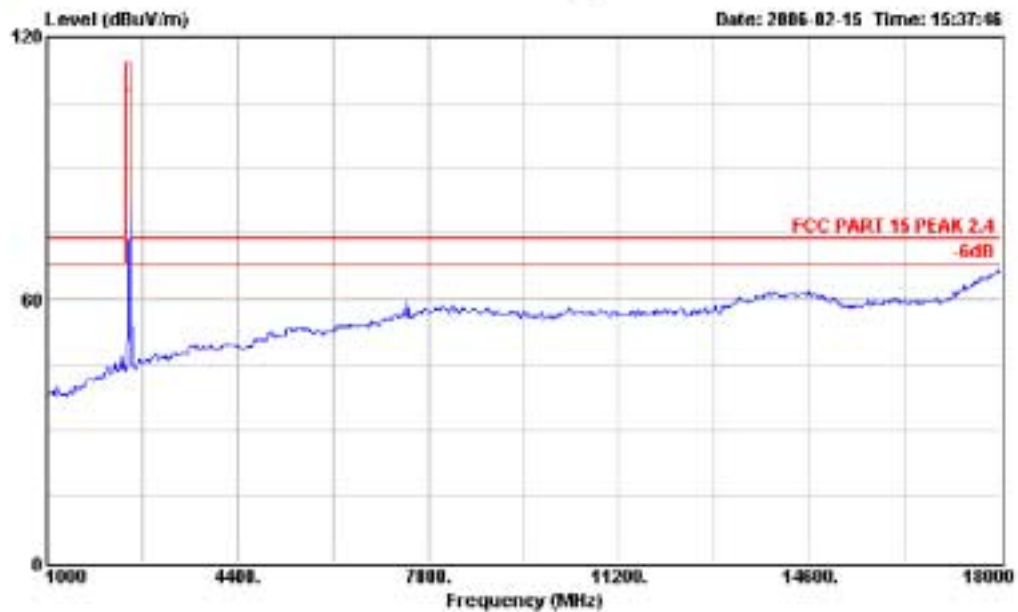


Site : site
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPX-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22' Humi:50%
 Memo : CH 2.47GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 47

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

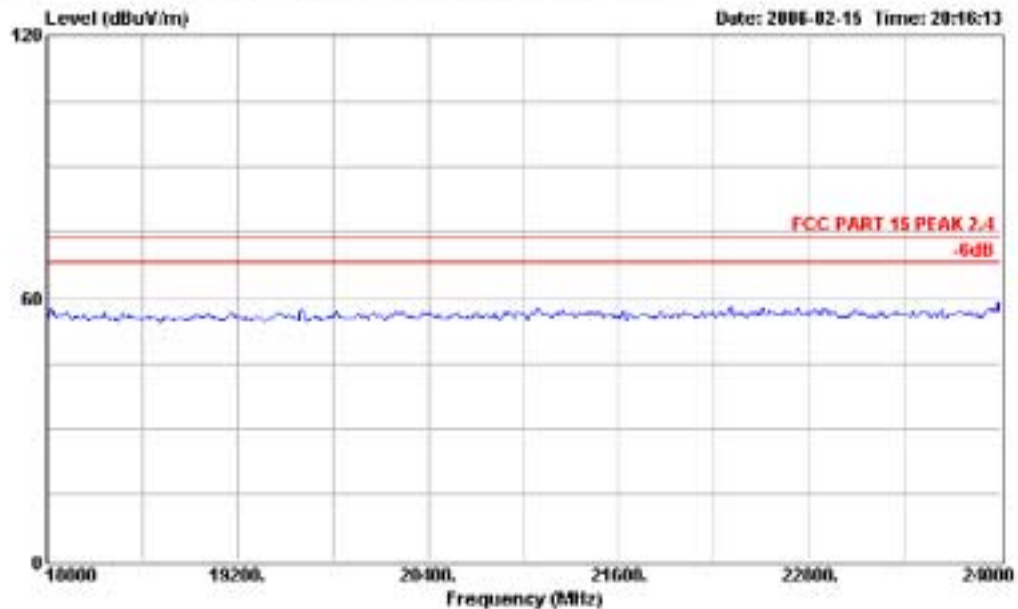


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humid:50%
 Memo : CH 2.41GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 48

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

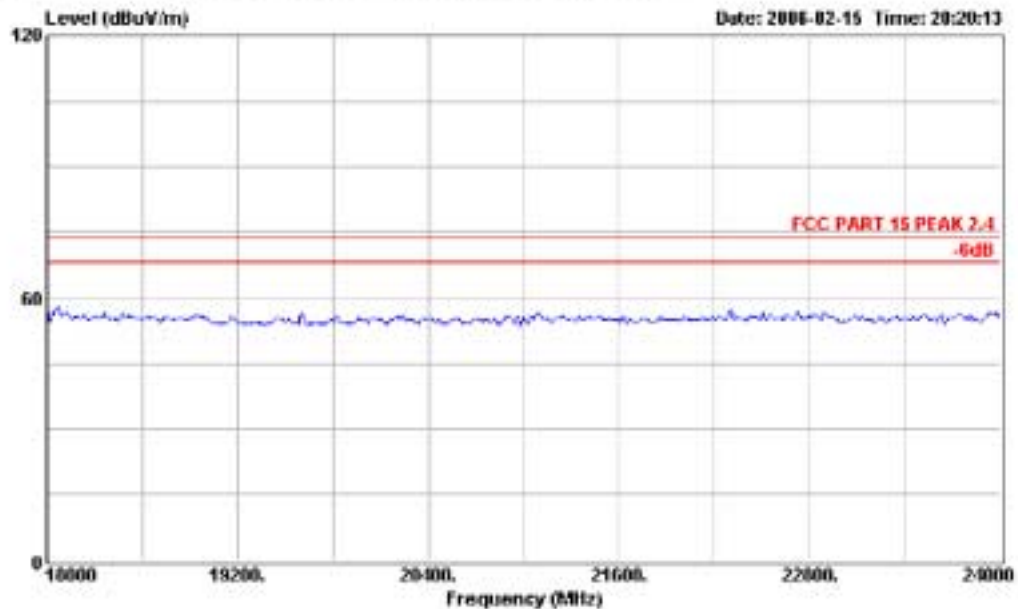


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humid:50%
 Memo : CH 2.41GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 49

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

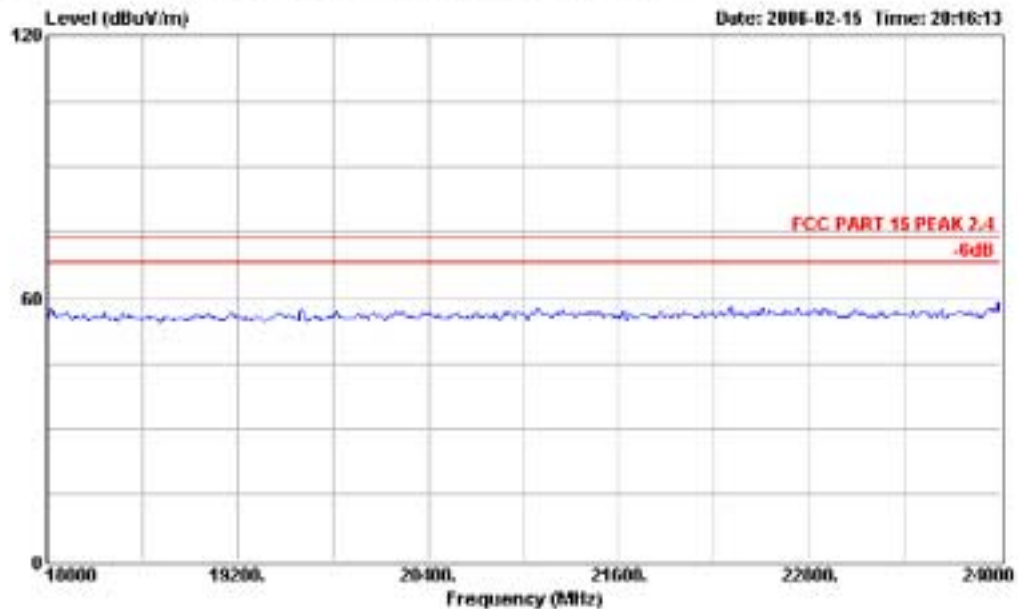


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humd:50%
 Memo : CH 2.44GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 50

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

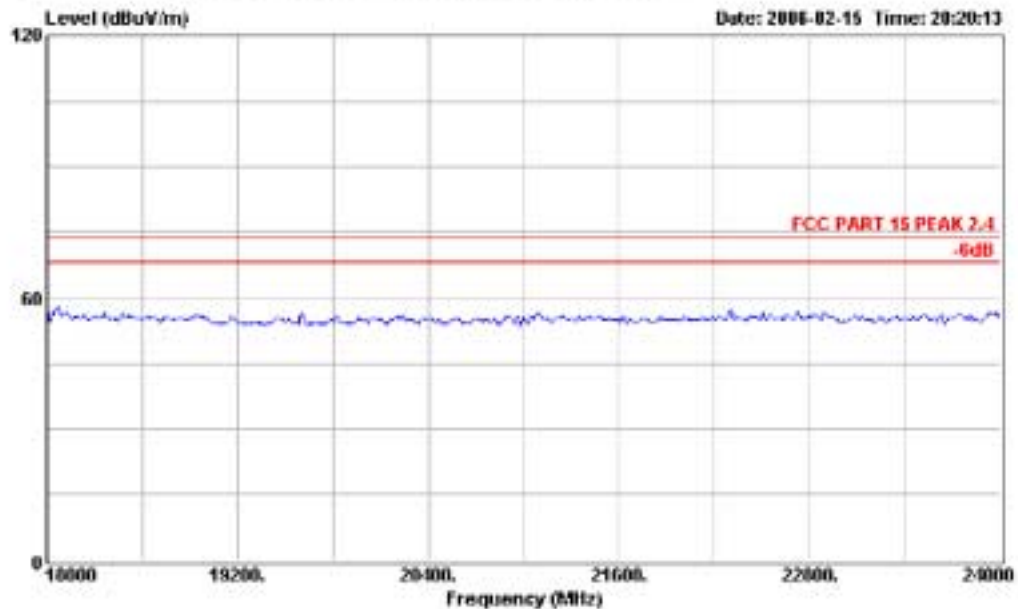


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humid:50%
 Memo : CH 2.44GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 51

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

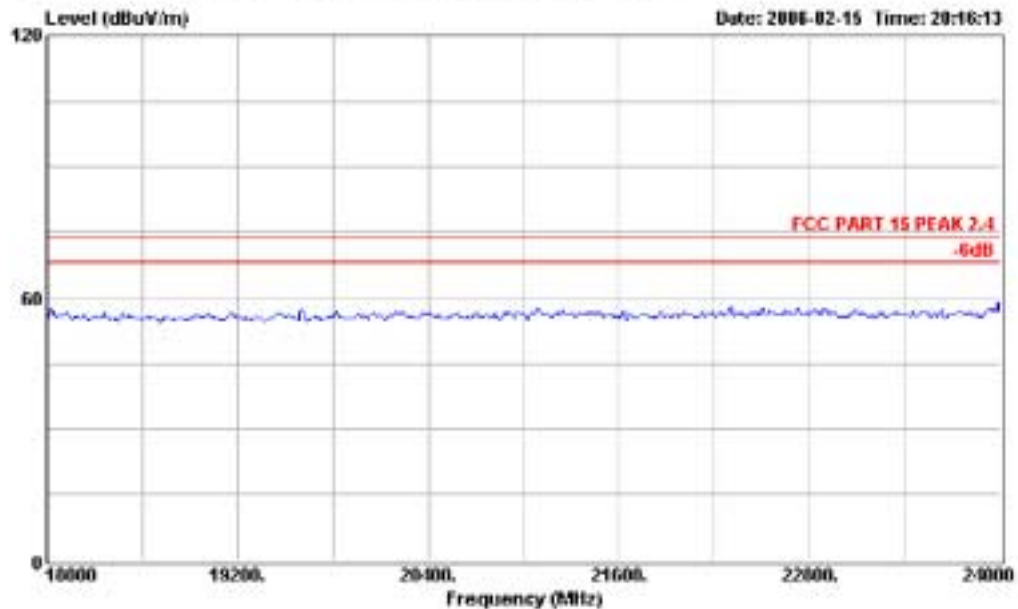


Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115 FACTOR HORIZONTAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humd:50%
 Memo : CH 2.47GHz



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 Guiliping Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 52

File#: D:\EMI TEST DATA\EE-core2\ACS6Q067.EMI

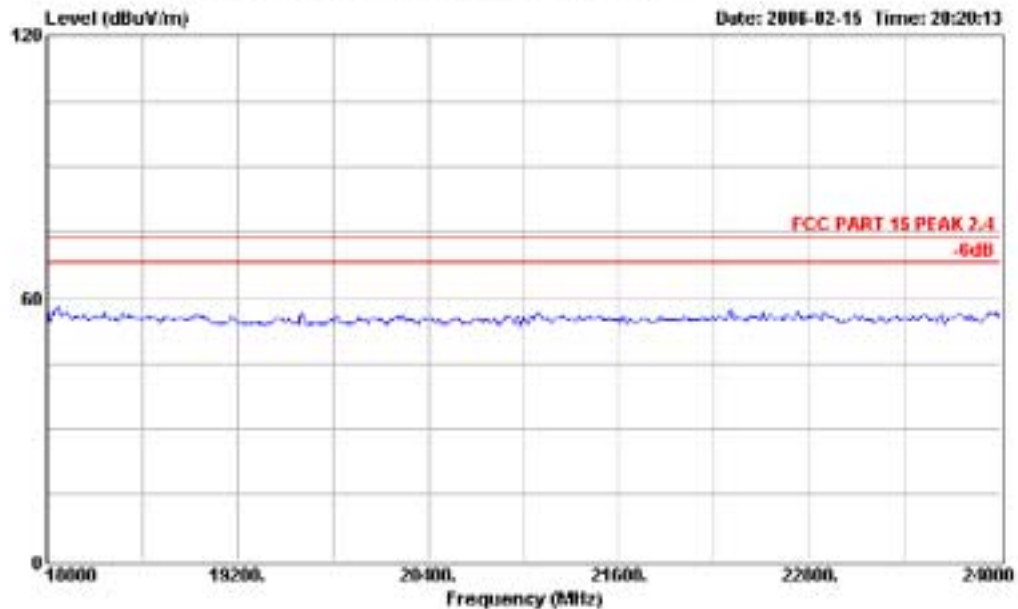

Site : 1# Chamber
 Condition : FCC PART 15 PEAK 2.4 3m 3115FACTOR VERTICAL
 EUT : PSII Lava Glow
 M/N : DGPV-551A
 Test Spec : DC 5V From PS2 Input AC 120V/60Hz
 Test Engineer : Jack
 OP Condition : TX
 Comment : Temp:22° Humd:50%
 Memo : CH 2.47GHz