

Contents

Item	Description	Page
1.	Cover	1
2.	Contents	2
3.	Specification	3
4.	Drawing	4
5	Test Report	5~11
6.	RoHS	12~50

Specification

- **Electrical Properties :**

1. Frequency : 2.4GHz ~ 2.5GHz
2. Impedance : 50Ω
3. Return Loss : $\leq$ -10dB
4. Peak Gain : 5dBi


- **Physical Properties :**

1. Antenna Cover : TPEE
2. Antenna Base : PBT+PC
3. Connector : SMA MALE-RP
4. Operation temperature : -20°C ~ +65°C
5. Storage temperature : -30°C ~ +75°C

Return Loss & VSWR



Gain Pattern

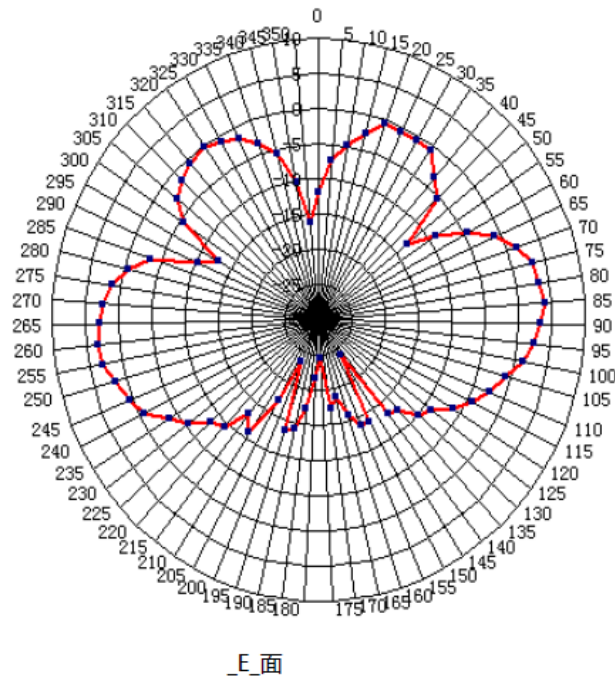

测试频率 (MHz)

2400

最大值

-49.31

最小值

-82.1


增益

4.7905

平均值

-61.89

Gain Pattern

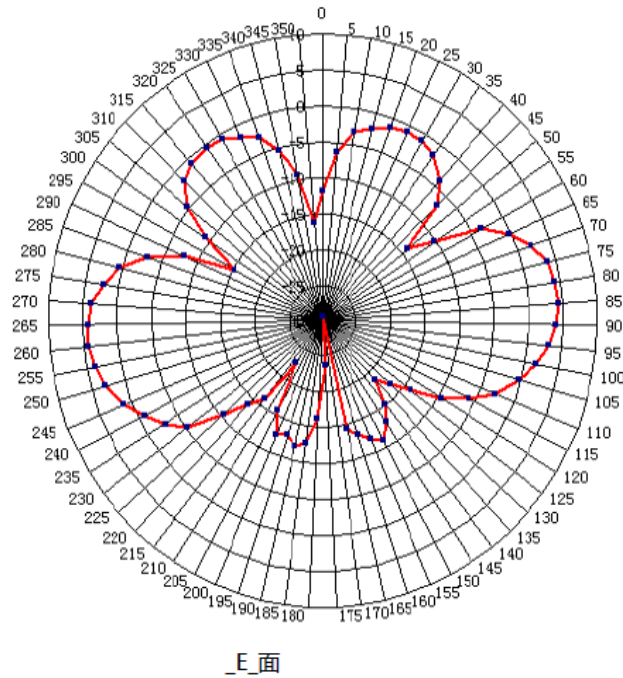

测试频率 (MHz)

2450

最大值

-49.23

最小值

-75.54


增益

4.8542

平均值

-60.97

Gain Pattern

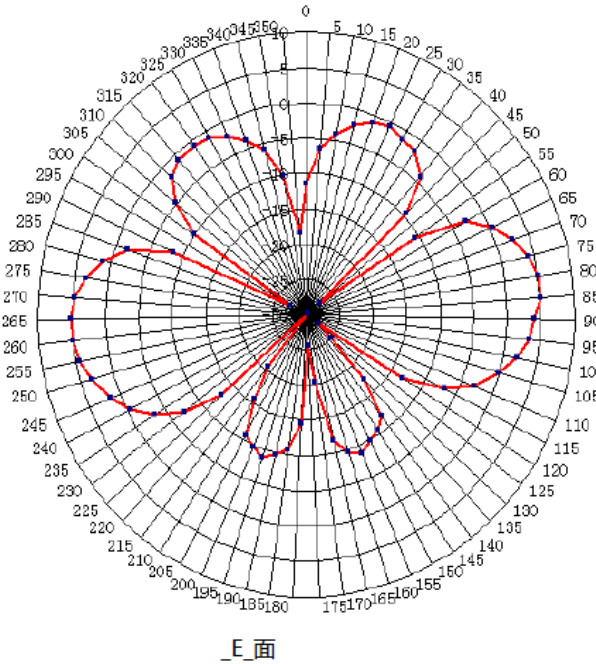


测试频率 (MHz)


- 2500
- 最大值
- 49.13
- 最小值
- 73.58
- 增益
- 4.6886
-
-
-
-

- 平均值
- 60.03
-
-
-
-


Gain Pattern

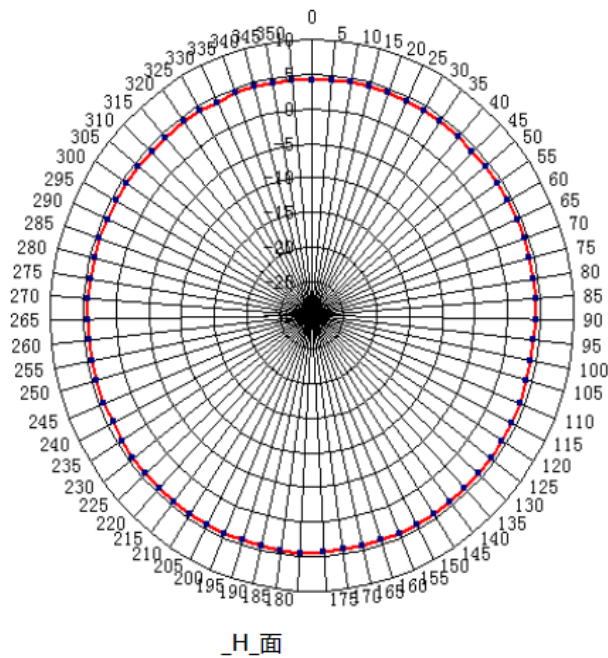

Gain Pattern

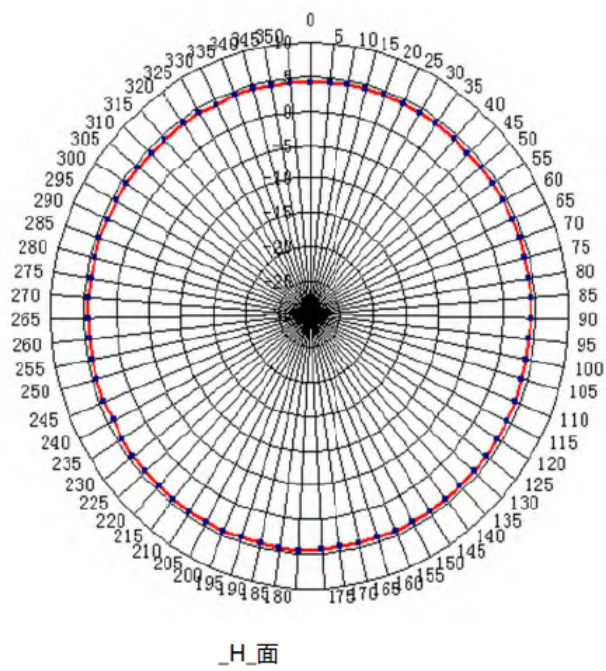

Gain Pattern

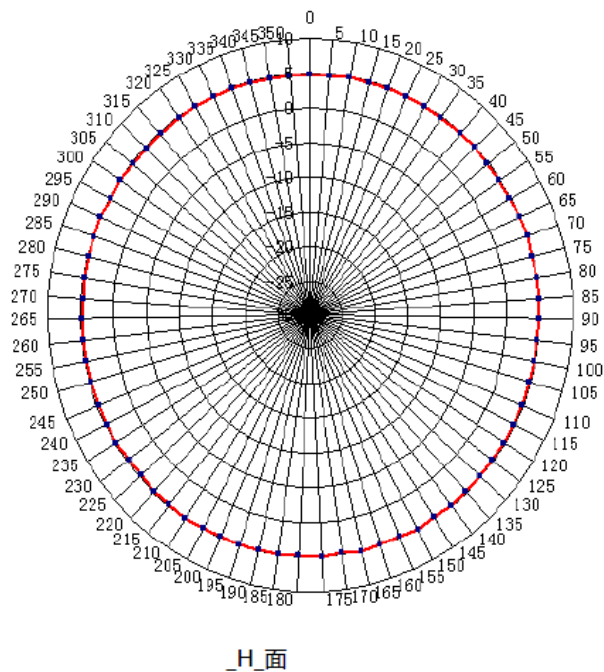

测试频率 (MHz)

2500

最大值

-48.8

最小值

-50.42

增益

4.6987

平均值

-49.56