


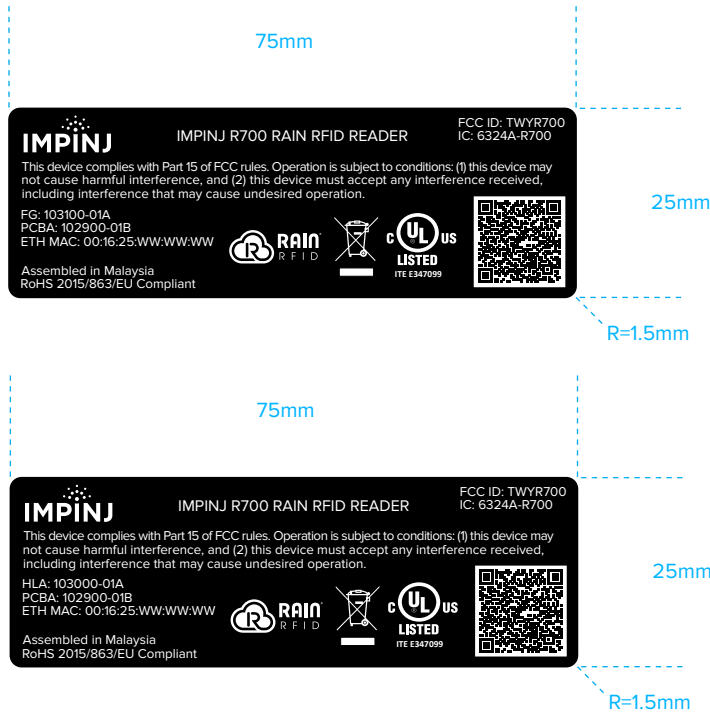

Notes

Material:

Stock label color: Black

Text color: White

Gloss: Level between 8 and 20

Board ID: U = Serialized digits for Board ID

Serial Number: V = Serialized digits for Serial Number

Ethernet MAC Address: W = Serialized digits for MAC Address

Model Number:

X = Region Identifier - 1 = FCC; 2 = EU; 3 = Global; 4 = Japan; 5 = Australia


Y = Port Identifier → 1 = 1-port; 2 = 2-port; 4 = 4-port

Z = Feature Identifier → 0 = no added features; 1 = WiFi

QR Code:

Should not be any larger than 12mm x 12mm. Smaller is preferred.

1. The following information should be encoded into QR code on the HLA and FG QR code label: HLA number, PCBA number, Board ID, Ethernet Mac Address, Model Number and Serial Number.

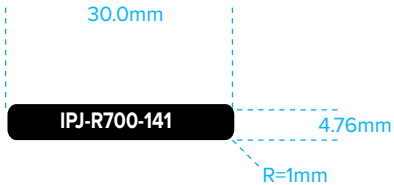




Notes

Material: Matte lamination

Stock label color: Black

Gloss: Level between 8 and 20

Text color: White

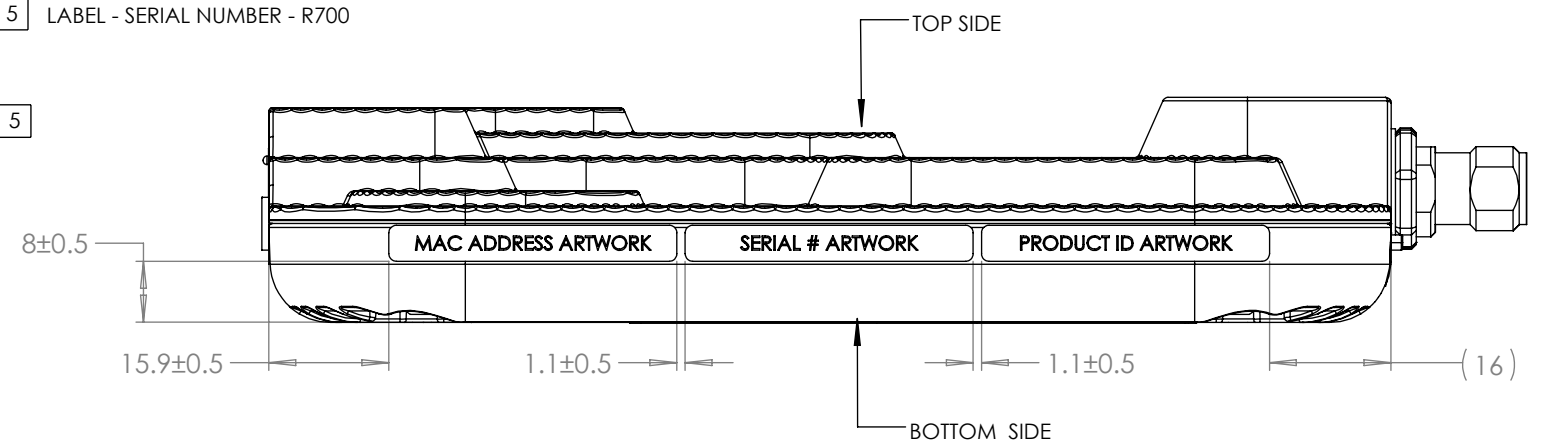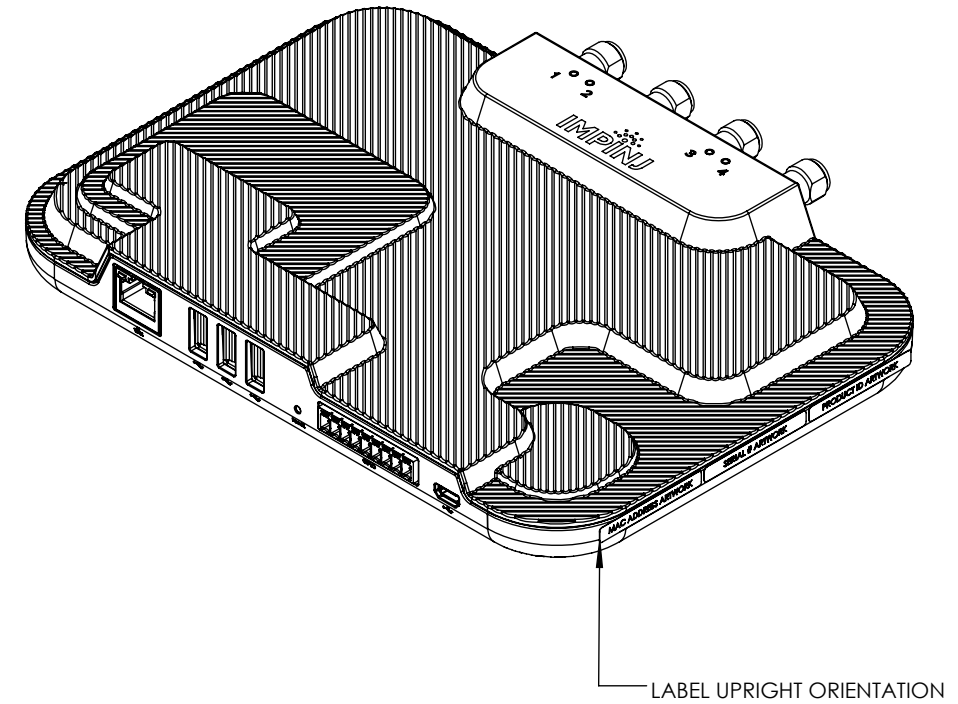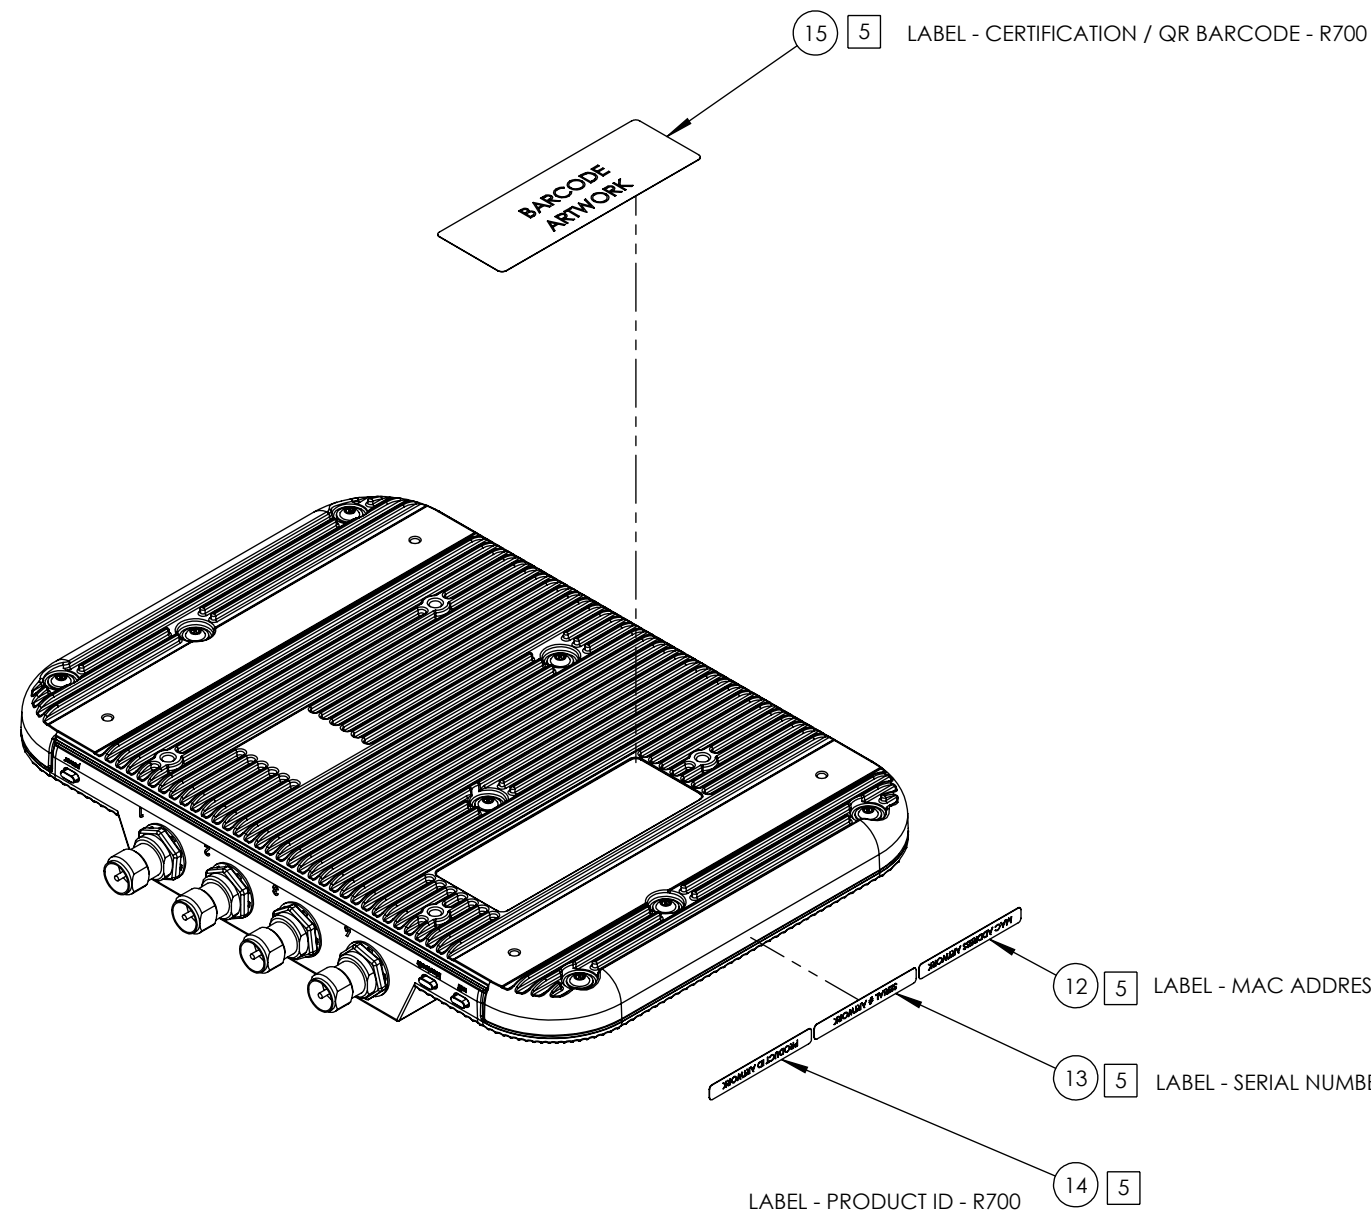

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF IMPINJ, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF IMPINJ, INC. IS PROHIBITED.

		400 Fairview Ave N, Suite 1200 Seattle, WA 98109 206-517-5300 WWW.IMPINJ.COM	
SIZE	DWG. NO.	REV	
B	102426-01	C	
SCALE: 1:2		WEIGHT: n/a	SHEET 4 OF 4