


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	57%
Test Engineer	Eason Chen	Configurations	2.4GHz + Bluetooth
Test Mode	Mode 3		

Horizontal

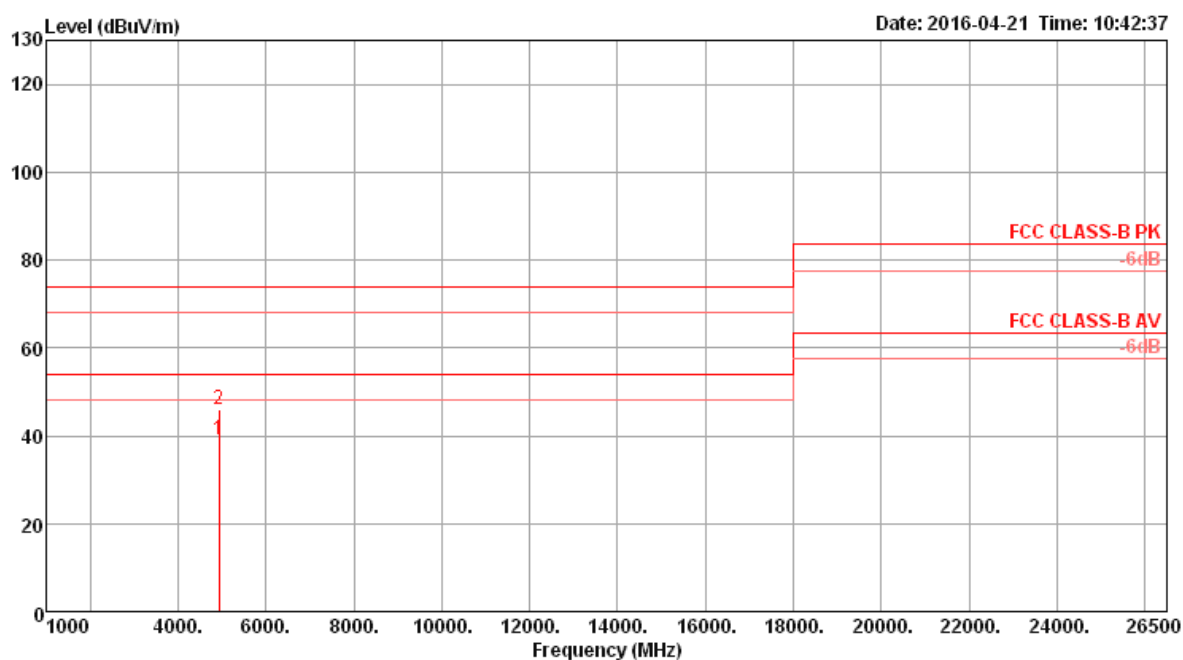

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4934.01	39.07	54.00	-14.93	33.15	7.76	31.22	33.06	151	208 Average	HORIZONTAL
2	4934.01	46.02	74.00	-27.98	40.10	7.76	31.22	33.06	151	208 Peak	HORIZONTAL

Vertical

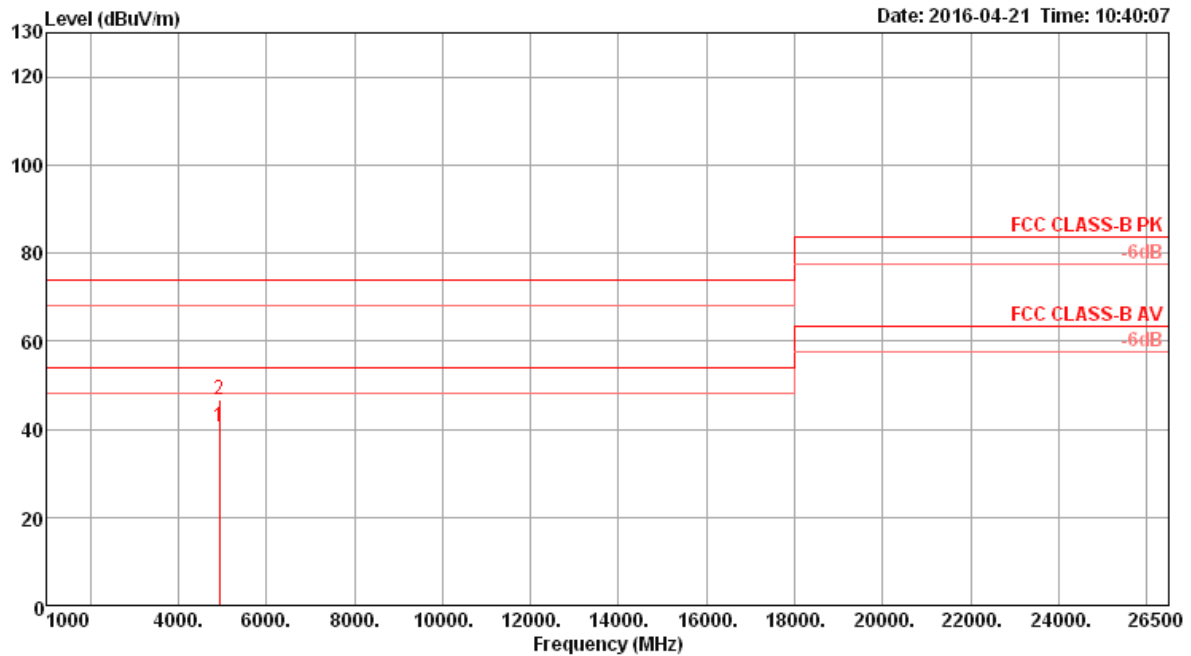

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4934.01	40.67	54.00	-13.33	34.75	7.76	31.22	33.06	152	80	Average	VERTICAL
2	4934.01	46.59	74.00	-27.41	40.67	7.76	31.22	33.06	152	80	Peak	VERTICAL