

#01_2.4GHz WLAN_802.11b 1Mbps_Bottom Side_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.46, 7.23, 7.29); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.386 W/kg; SAR (10g) = 0.193 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.411 W/kg; SAR (8g) = 0.204 W/kg; SAR (10g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

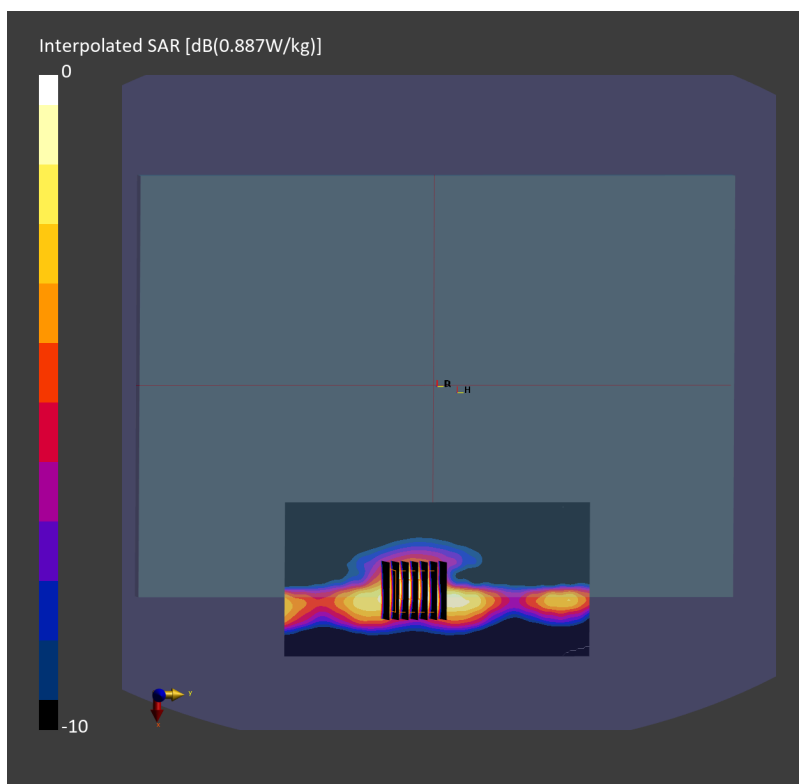

#02_5.3GHz WLAN_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch 58

Communication System: IEEE 802.11ac WiFi; Frequency: 5290.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 5290.000$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 34.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.66, 5.49, 5.53); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.360 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.2 %

TSL Correction: Positive only

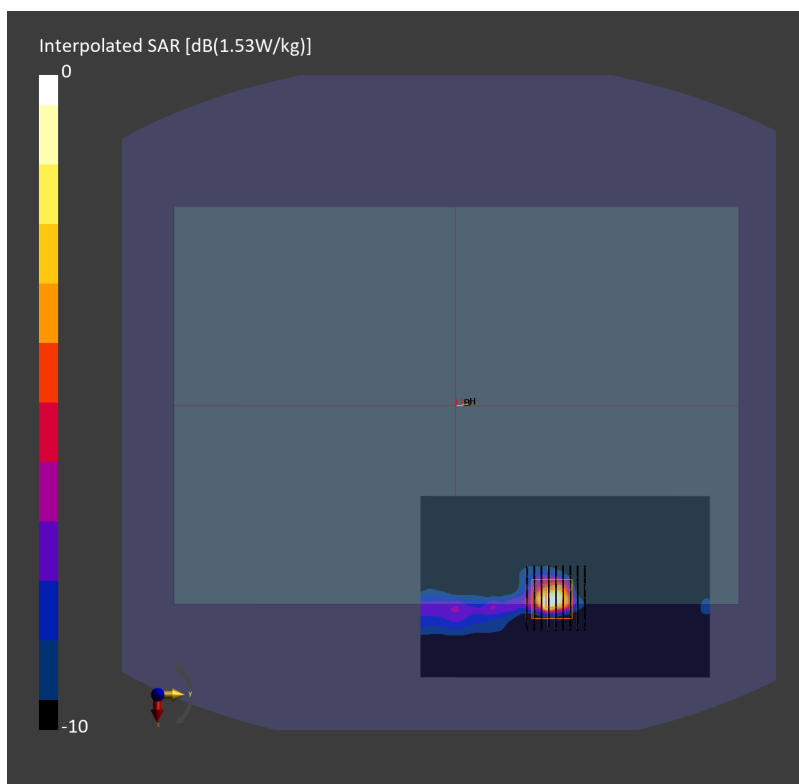

#03_5.5GHz WLAN_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch 138;Main

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 4.98$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.27, 5.11, 5.15); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 260.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.046 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.186 W/kg; SAR (8g) = 0.060 W/kg; SAR (10g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.7 %

TSL Correction: Positive only

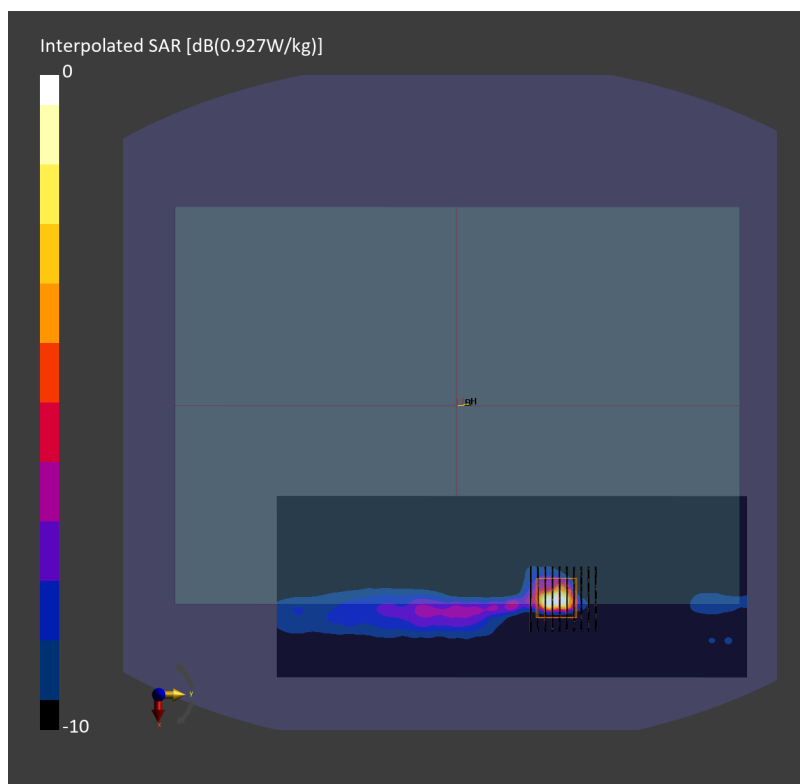

#04_5.8GHz WLAN_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch 155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.21, 5.05, 5.09); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.056 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.19 dB

SAR (1g) = 0.200 W/kg; SAR (8g) = 0.071 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

TSL Correction: Positive only

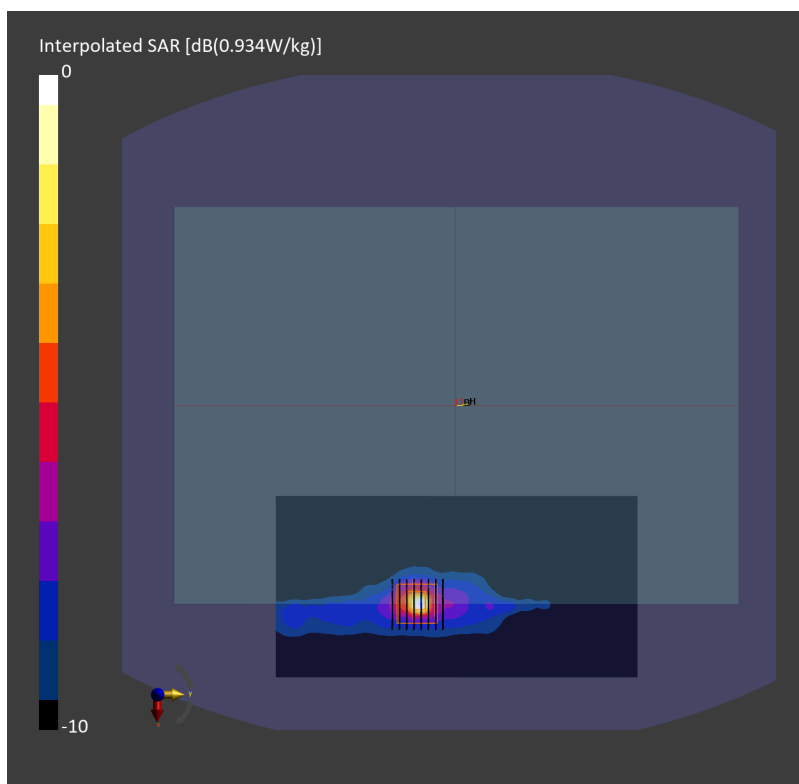

#05_5.9GHz WLAN UNII 4_802.11ac-VHT80 MCS0_Bottom Side_0mm_Ch 171

Communication System: IEEE 802.11ac WiFi; Frequency: 5855.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 5855.000$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(5.21, 5.05, 5.09); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.206 W/kg; SAR (10g) = 0.062 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.244 W/kg; SAR (8g) = 0.079 W/kg; SAR (10g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

TSL Correction: Positive only

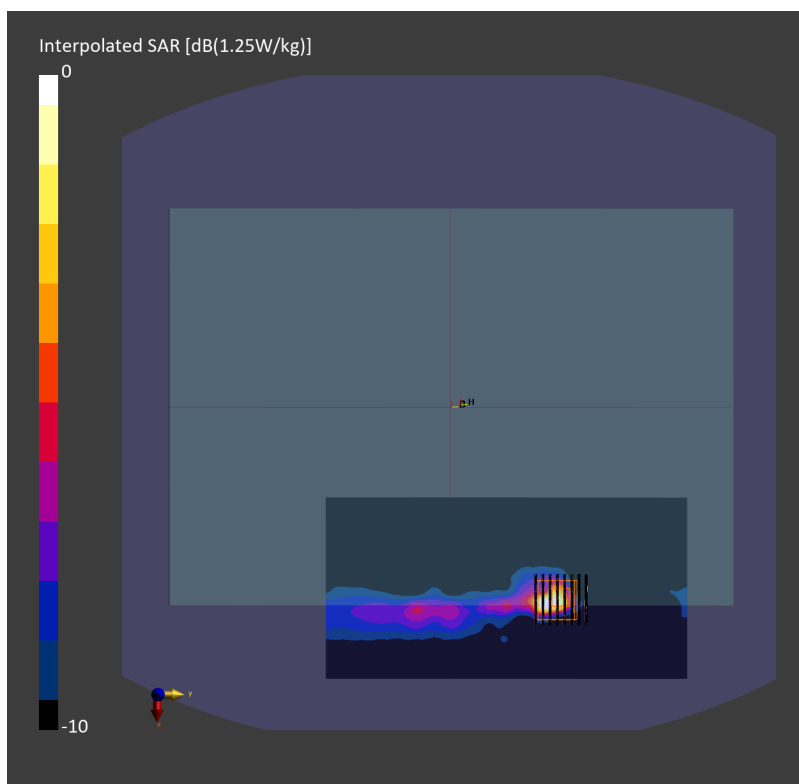

#06_Bluetooth_1Mbps_Bottom Side_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260810 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.46, 7.23, 7.29); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.092 W/kg; SAR (10g) = 0.045 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.096 W/kg; SAR (8g) = 0.048 W/kg; SAR (10g) = 0.043 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

