



Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6935	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
		6985	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	v	100%	90%

Plots of EUT Tx waveform

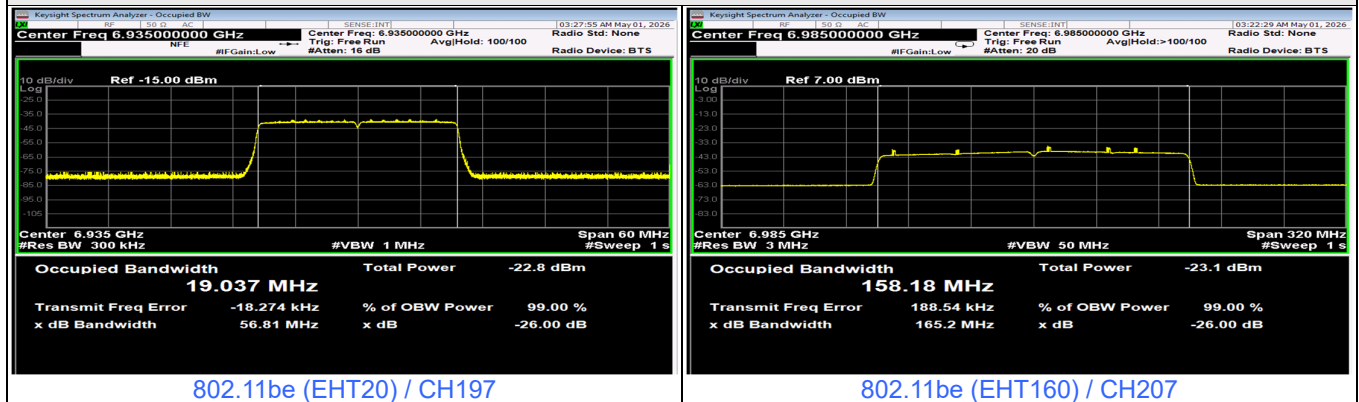


Plots of Injected signal (AWGN) level

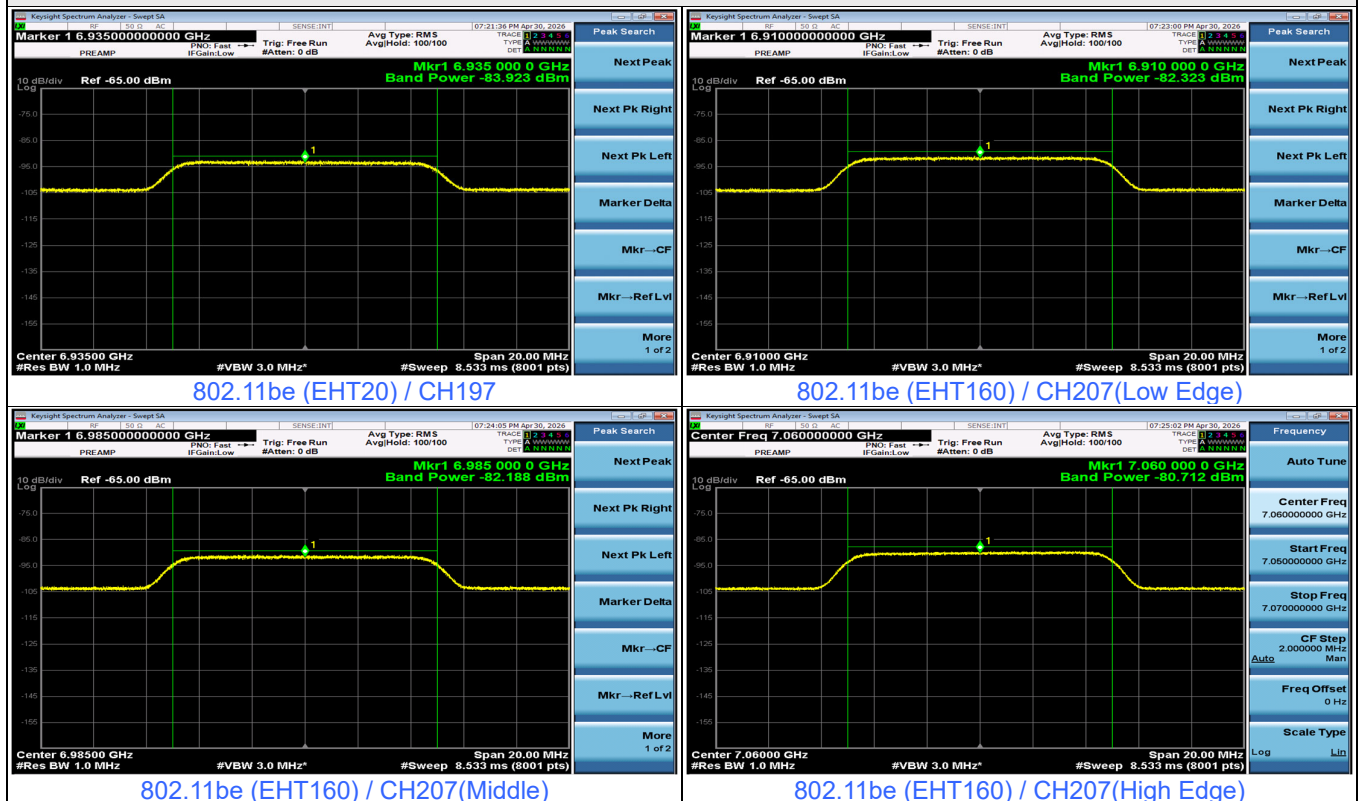


Plots of EUT ceased transmission in the time domain

UNI18_BW20_6935_TRS

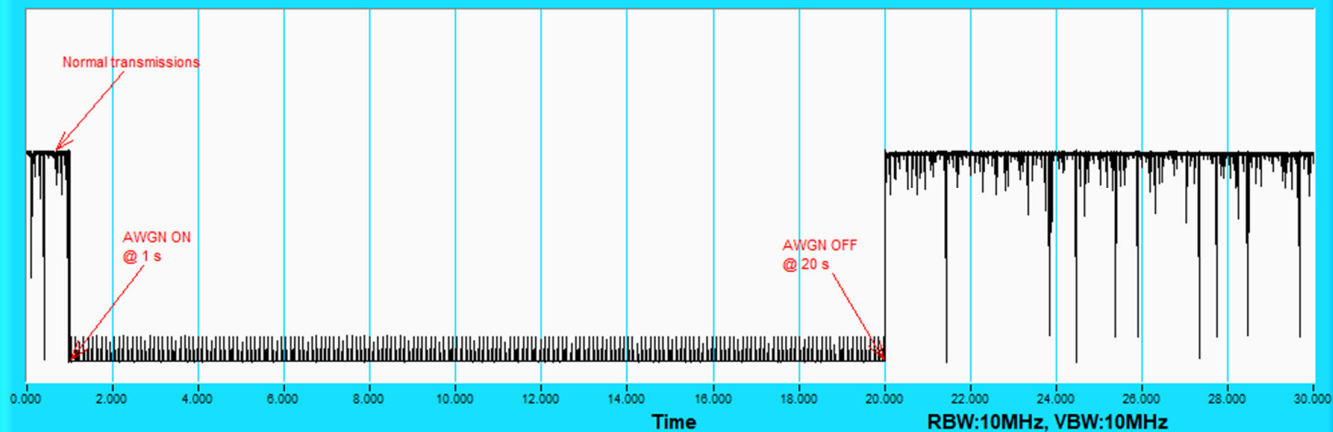


802.11be (EHT20) / CH197

UNI18_BW160_6910_TRS

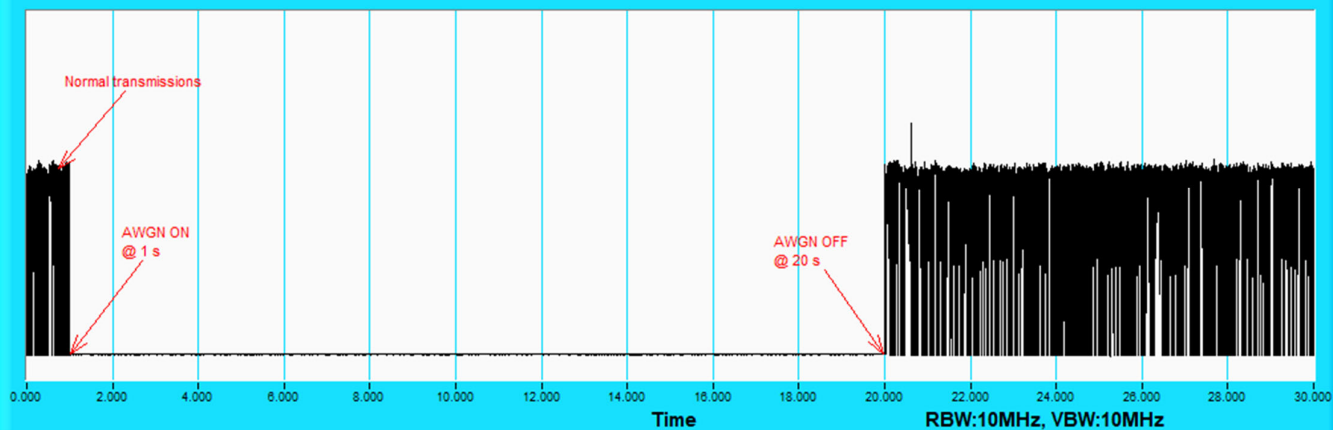

802.11be (EHT160) / CH207(Low Edge)


UNI18_BW160_6985_TRS

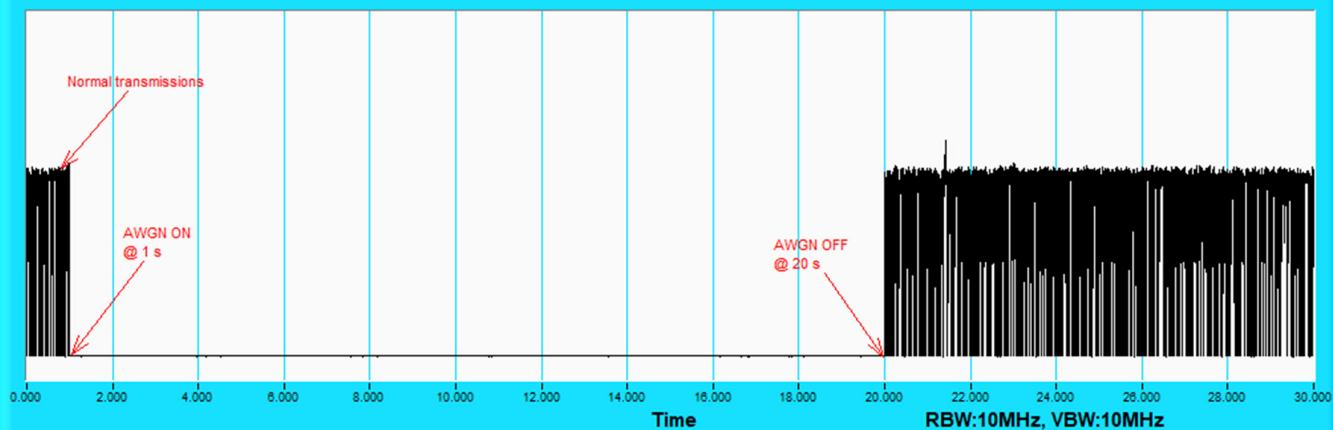

802.11be (EHT160) / CH207(Middle)

Plots of EUT ceased transmission in the time domain

UNI18_BW160_7060_TRS

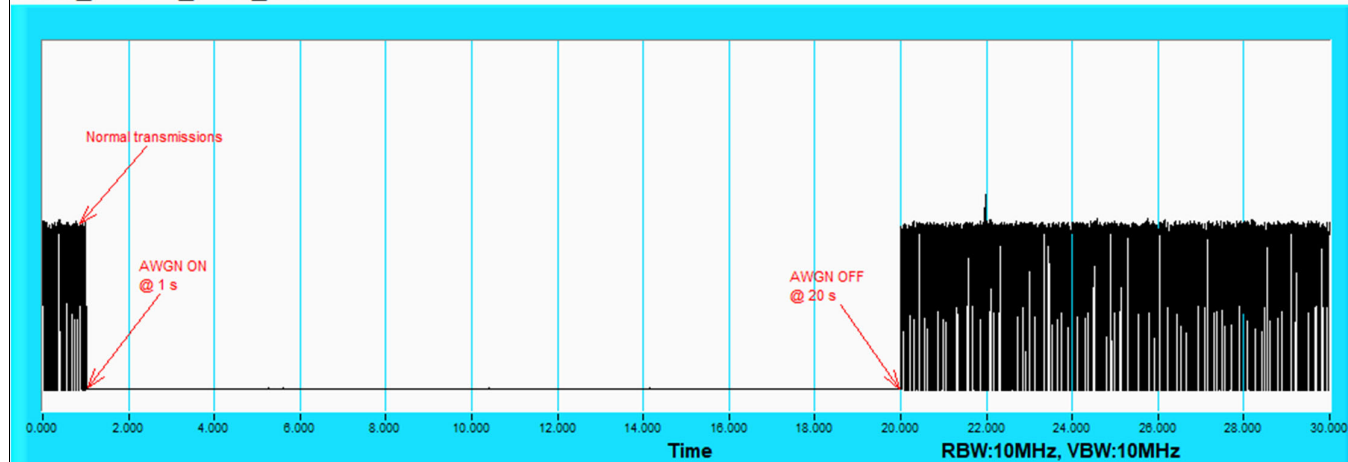

802.11be (EHT160) / CH207(High Edge)

7.7 AC Power Conducted Emissions


Mode A

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Stars Liu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	9.99	33.86	19.77	43.85	29.76	64.98	54.98	-21.13	-25.22
2	0.48594	10.11	28.82	24.76	38.93	34.87	56.24	46.24	-17.31	-11.37
3	1.30469	10.24	10.37	6.28	20.61	16.52	56.00	46.00	-35.39	-29.48
4	3.33203	10.42	12.28	5.50	22.70	15.92	56.00	46.00	-33.30	-30.08
5	16.65234	11.35	17.30	12.08	28.65	23.43	60.00	50.00	-31.35	-26.57
6	26.75391	11.57	14.22	14.21	25.79	25.78	60.00	50.00	-34.21	-24.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

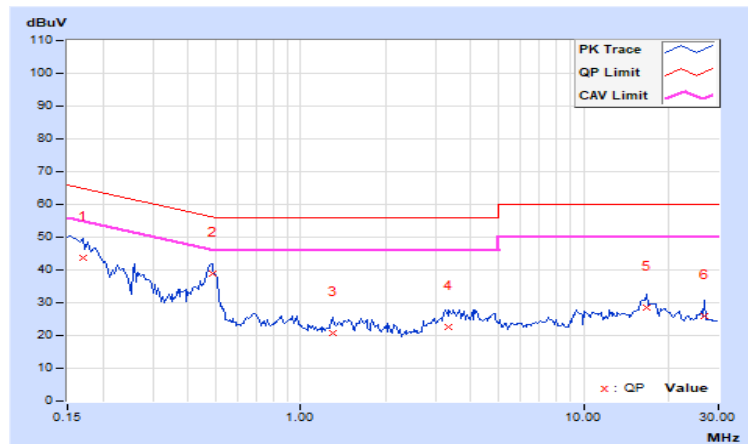


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Stars Liu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.00	37.61	22.66	47.61	32.66	66.00	56.00	-18.39	-23.34
2	0.48594	9.96	25.60	21.38	35.56	31.34	56.24	46.24	-20.68	-14.90
3	3.23438	10.16	11.23	3.98	21.39	14.14	56.00	46.00	-34.61	-31.86
4	9.41016	10.57	14.73	9.69	25.30	20.26	60.00	50.00	-34.70	-29.74
5	15.01563	10.89	20.06	16.77	30.95	27.66	60.00	50.00	-29.05	-22.34
6	19.95703	11.14	17.45	13.60	28.59	24.74	60.00	50.00	-31.41	-25.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

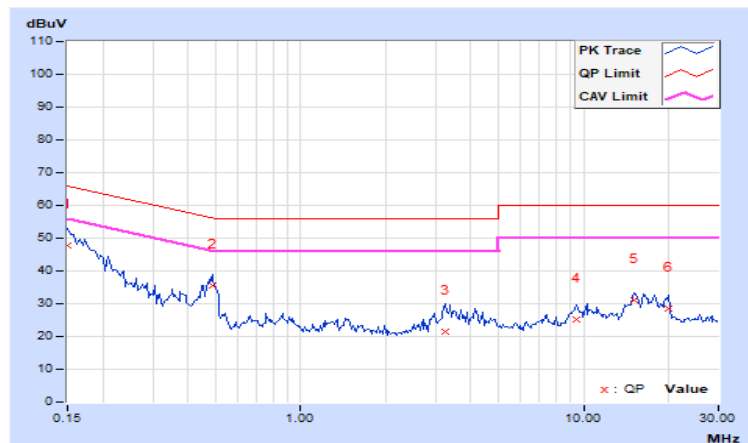

7.8 Unwanted Emissions below 1 GHz


Mode A

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24.9 °C, 67.7% RH
Tested By	Roger Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.65	40.3 PK	43.5	-3.2	2.00 H	132	58.0	-17.7
2	199.17	31.4 PK	43.5	-12.1	2.00 H	1	47.8	-16.4
3	299.32	35.7 PK	46.0	-10.3	1.00 H	47	48.3	-12.6
4	497.88	31.0 PK	46.0	-15.0	2.00 H	267	39.0	-8.0
5	697.00	35.3 PK	46.0	-10.7	1.00 H	94	39.7	-4.4
6	917.48	32.5 PK	46.0	-13.5	1.00 H	319	33.1	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

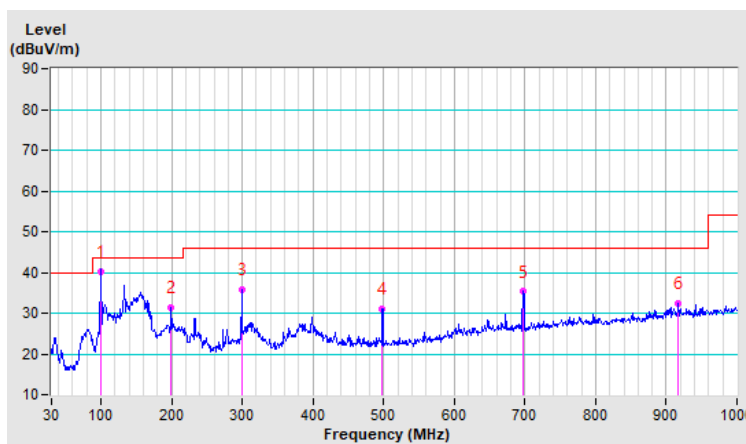


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24.9 °C, 67.7% RH
Tested By	Roger Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.68	34.9 PK	40.0	-5.1	1.00 V	32	49.0	-14.1
2	99.72	37.4 PK	43.5	-6.1	2.00 V	106	55.1	-17.7
3	298.74	31.8 PK	46.0	-14.2	2.00 V	270	44.4	-12.6
4	498.87	30.2 PK	46.0	-15.8	2.00 V	88	38.2	-8.0
5	697.02	31.1 PK	46.0	-14.9	2.00 V	313	35.5	-4.4
6	973.42	31.0 PK	54.0	-23.0	2.00 V	240	30.4	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

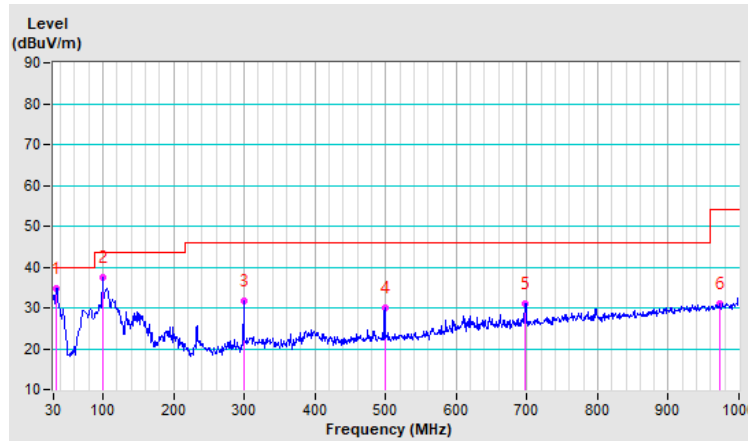


Mode B

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24.6 °C, 70.6% RH
Tested By	Roger Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.77	39.5 QP	43.5	-4.0	2.00 H	347	57.2	-17.7
2	199.17	31.2 PK	43.5	-12.3	1.00 H	360	47.6	-16.4
3	299.30	35.9 PK	46.0	-10.1	1.00 H	39	48.5	-12.6
4	497.88	35.2 PK	46.0	-10.8	2.00 H	360	43.2	-8.0
5	697.00	34.0 PK	46.0	-12.0	1.00 H	88	38.4	-4.4
6	891.60	31.1 PK	46.0	-14.9	2.00 H	92	32.4	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

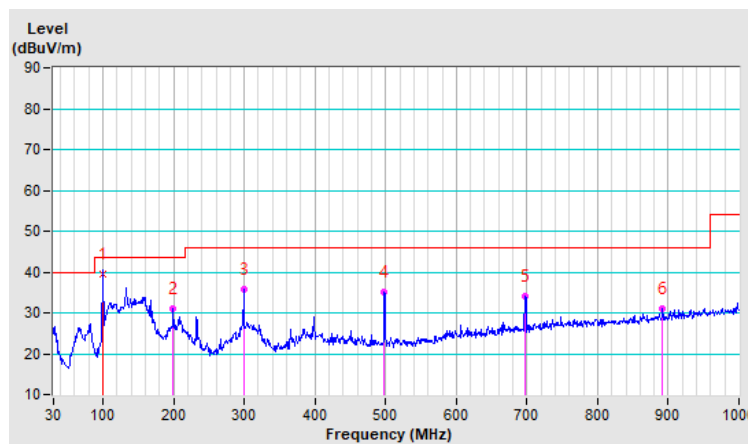


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24.6 °C, 70.6% RH
Tested By	Roger Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.70	35.3 PK	40.0	-4.7	1.00 V	25	49.4	-14.1
2	99.60	37.1 PK	43.5	-6.4	1.00 V	112	54.8	-17.7
3	299.30	32.6 PK	46.0	-13.4	2.00 V	63	45.2	-12.6
4	497.90	30.2 PK	46.0	-15.8	1.00 V	115	38.2	-8.0
5	697.04	31.4 PK	46.0	-14.6	1.00 V	336	35.8	-4.4
6	902.27	35.5 PK	46.0	-10.5	2.00 V	303	36.6	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

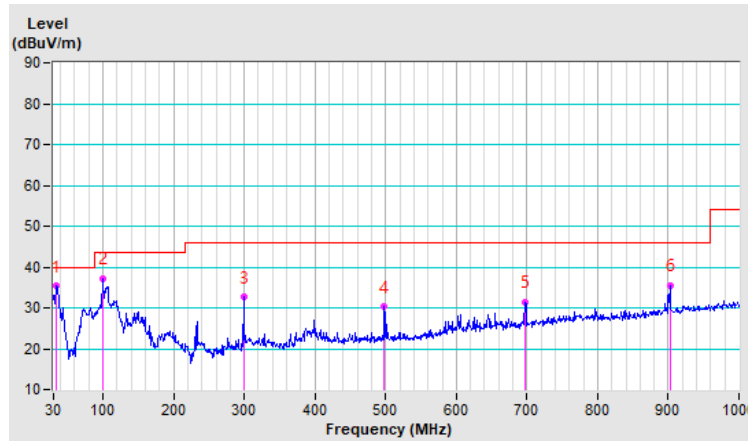

7.9 Unwanted Emissions above 1 GHz

Mode A

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.8 PK	88.2	-10.4	2.13 H	225	73.4	4.4
2	#5925.00	58.5 AV	68.2	-9.7	2.13 H	225	54.1	4.4
3	*5955.00	113.2 PK			2.13 H	225	108.7	4.5
4	*5955.00	103.4 AV			2.13 H	225	98.9	4.5
5	11910.00	47.8 PK	74.0	-26.2	2.24 H	196	34.1	13.7
6	11910.00	35.8 AV	54.0	-18.2	2.24 H	196	22.1	13.7
7	17865.00	54.2 PK	74.0	-19.8	1.51 H	299	29.9	24.3
8	17865.00	38.3 AV	54.0	-15.7	1.51 H	299	14.0	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.41 V	327	70.3	4.4
2	#5925.00	59.5 AV	68.2	-8.7	1.41 V	327	55.1	4.4
3	*5955.00	112.8 PK			1.41 V	327	108.3	4.5
4	*5955.00	103.5 AV			1.41 V	327	99.0	4.5
5	11910.00	47.0 PK	74.0	-27.0	2.34 V	168	33.3	13.7
6	11910.00	35.6 AV	54.0	-18.4	2.34 V	168	21.9	13.7
7	17865.00	56.4 PK	74.0	-17.6	3.90 V	272	32.1	24.3
8	17865.00	43.5 AV	54.0	-10.5	3.90 V	272	19.2	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.3 PK			2.10 H	224	108.5	4.8
2	*6195.00	103.5 AV			2.10 H	224	98.7	4.8
3	12390.00	47.9 PK	74.0	-26.1	2.23 H	179	34.0	13.9
4	12390.00	35.9 AV	54.0	-18.1	2.23 H	179	22.0	13.9
5	18585.00	54.0 PK	74.0	-20.0	1.45 H	315	59.0	-5.0
6	18585.00	38.0 AV	54.0	-16.0	1.45 H	315	43.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.3 PK			1.48 V	329	106.5	4.8
2	*6195.00	102.7 AV			1.48 V	329	97.9	4.8
3	12390.00	46.9 PK	74.0	-27.1	2.36 V	167	33.0	13.9
4	12390.00	35.5 AV	54.0	-18.5	2.36 V	167	21.6	13.9
5	18585.00	56.4 PK	74.0	-17.6	3.84 V	289	61.4	-5.0
6	18585.00	44.1 AV	54.0	-9.9	3.84 V	289	49.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.2 PK			2.14 H	234	107.0	6.2
2	*6415.00	103.6 AV			2.14 H	234	97.4	6.2
3	#12830.00	48.1 PK	88.2	-40.1	2.27 H	174	33.6	14.5
4	#12830.00	35.8 AV	68.2	-32.4	2.27 H	174	21.3	14.5
5	19245.00	54.4 PK	74.0	-19.6	1.45 H	329	58.2	-3.8
6	19245.00	38.4 AV	54.0	-15.6	1.45 H	329	42.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.6 PK			1.46 V	328	106.4	6.2
2	*6415.00	103.2 AV			1.46 V	328	97.0	6.2
3	#12830.00	47.1 PK	88.2	-41.1	2.41 V	143	32.6	14.5
4	#12830.00	35.7 AV	68.2	-32.5	2.41 V	143	21.2	14.5
5	19245.00	57.0 PK	74.0	-17.0	3.92 V	297	60.8	-3.8
6	19245.00	44.2 AV	54.0	-9.8	3.92 V	297	48.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.7 PK			2.12 H	228	106.5	6.2
2	*6435.00	103.1 AV			2.12 H	228	96.9	6.2
3	#12870.00	48.2 PK	88.2	-40.0	2.24 H	189	33.5	14.7
4	#12870.00	35.9 AV	68.2	-32.3	2.24 H	189	21.2	14.7
5	19305.00	54.1 PK	74.0	-19.9	1.50 H	324	57.8	-3.7
6	19305.00	38.3 AV	54.0	-15.7	1.50 H	324	42.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.4 PK			1.45 V	325	106.2	6.2
2	*6435.00	103.1 AV			1.45 V	325	96.9	6.2
3	#12870.00	47.1 PK	88.2	-41.1	2.34 V	142	32.4	14.7
4	#12870.00	35.5 AV	68.2	-32.7	2.34 V	142	20.8	14.7
5	19305.00	56.8 PK	74.0	-17.2	3.92 V	282	60.5	-3.7
6	19305.00	44.1 AV	54.0	-9.9	3.92 V	282	47.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.3 PK			1.15 H	21	109.9	6.4
2	*6475.00	107.7 AV			1.15 H	21	101.3	6.4
3	#12950.00	47.2 PK	88.2	-41.0	2.22 H	186	32.5	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.22 H	186	20.6	14.7
5	19425.00	53.2 PK	74.0	-20.8	1.48 H	334	57.0	-3.8
6	19425.00	37.8 AV	54.0	-16.2	1.48 H	334	41.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.97 V	255	110.7	6.4
2	*6475.00	107.4 AV			1.97 V	255	101.0	6.4
3	#12950.00	46.8 PK	88.2	-41.4	2.26 V	192	32.1	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.26 V	192	20.6	14.7
5	19425.00	60.0 PK	74.0	-14.0	2.39 V	169	63.8	-3.8
6	19425.00	46.4 AV	54.0	-7.6	2.39 V	169	50.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	113.4 PK			2.17 H	234	106.7	6.7
2	*6515.00	103.4 AV			2.17 H	234	96.7	6.7
3	#13030.00	47.3 PK	88.2	-40.9	2.28 H	187	32.7	14.6
4	#13030.00	35.3 AV	68.2	-32.9	2.28 H	187	20.7	14.6
5	19545.00	54.5 PK	74.0	-19.5	1.54 H	305	58.6	-4.1
6	19545.00	38.5 AV	54.0	-15.5	1.54 H	305	42.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.7 PK			1.43 V	317	106.0	6.7
2	*6515.00	103.5 AV			1.43 V	317	96.8	6.7
3	#13030.00	47.1 PK	88.2	-41.1	2.34 V	138	32.5	14.6
4	#13030.00	35.5 AV	68.2	-32.7	2.34 V	138	20.9	14.6
5	19545.00	55.8 PK	74.0	-18.2	3.90 V	290	59.9	-4.1
6	19545.00	43.3 AV	54.0	-10.7	3.90 V	290	47.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.8 PK			2.16 H	210	107.0	6.8
2	*6535.00	103.7 AV			2.16 H	210	96.9	6.8
3	#13070.00	47.5 PK	88.2	-40.7	2.22 H	186	32.8	14.7
4	#13070.00	35.0 AV	68.2	-33.2	2.22 H	186	20.3	14.7
5	19605.00	53.8 PK	74.0	-20.2	1.51 H	304	57.8	-4.0
6	19605.00	37.7 AV	54.0	-16.3	1.51 H	304	41.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.8 PK			1.38 V	321	106.0	6.8
2	*6535.00	103.7 AV			1.38 V	321	96.9	6.8
3	#13070.00	46.9 PK	88.2	-41.3	2.30 V	153	32.2	14.7
4	#13070.00	35.1 AV	68.2	-33.1	2.30 V	153	20.4	14.7
5	19605.00	56.5 PK	74.0	-17.5	3.87 V	274	60.5	-4.0
6	19605.00	43.9 AV	54.0	-10.1	3.87 V	274	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.4 PK			2.16 H	225	106.4	7.0
2	*6695.00	103.4 AV			2.16 H	225	96.4	7.0
3	13390.00	47.2 PK	74.0	-26.8	2.20 H	174	31.9	15.3
4	13390.00	35.2 AV	54.0	-18.8	2.20 H	174	19.9	15.3
5	20085.00	53.8 PK	74.0	-20.2	1.52 H	299	57.3	-3.5
6	20085.00	38.1 AV	54.0	-15.9	1.52 H	299	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	112.4 PK			1.44 V	305	105.4	7.0
2	*6695.00	103.1 AV			1.44 V	305	96.1	7.0
3	13390.00	47.0 PK	74.0	-27.0	2.34 V	158	31.7	15.3
4	13390.00	35.4 AV	54.0	-18.6	2.34 V	158	20.1	15.3
5	20085.00	55.5 PK	74.0	-18.5	3.85 V	278	59.0	-3.5
6	20085.00	43.2 AV	54.0	-10.8	3.85 V	278	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.9 PK			2.11 H	234	105.9	7.0
2	*6855.00	103.2 AV			2.11 H	234	96.2	7.0
3	#13710.00	47.4 PK	88.2	-40.8	2.20 H	178	31.1	16.3
4	#13710.00	35.1 AV	68.2	-33.1	2.20 H	178	18.8	16.3
5	20565.00	53.7 PK	74.0	-20.3	1.50 H	305	57.0	-3.3
6	20565.00	37.8 AV	54.0	-16.2	1.50 H	305	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.8 PK			1.43 V	307	105.8	7.0
2	*6855.00	103.7 AV			1.43 V	307	96.7	7.0
3	#13710.00	47.5 PK	88.2	-40.7	2.32 V	169	31.2	16.3
4	#13710.00	36.0 AV	68.2	-32.2	2.32 V	169	19.7	16.3
5	20565.00	57.0 PK	74.0	-17.0	3.86 V	297	60.3	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.86 V	297	47.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.9 PK			2.11 H	232	106.8	7.1
2	*6875.00	103.8 AV			2.11 H	232	96.7	7.1
3	#13750.00	47.5 PK	88.2	-40.7	2.20 H	188	31.4	16.1
4	#13750.00	35.5 AV	68.2	-32.7	2.20 H	188	19.4	16.1
5	20625.00	54.1 PK	74.0	-19.9	1.50 H	328	57.4	-3.3
6	20625.00	38.3 AV	54.0	-15.7	1.50 H	328	41.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.3 PK			1.48 V	311	106.2	7.1
2	*6875.00	103.9 AV			1.48 V	311	96.8	7.1
3	#13750.00	46.8 PK	88.2	-41.4	2.39 V	157	30.7	16.1
4	#13750.00	35.2 AV	68.2	-33.0	2.39 V	157	19.1	16.1
5	20625.00	55.8 PK	74.0	-18.2	3.92 V	272	59.1	-3.3
6	20625.00	43.4 AV	54.0	-10.6	3.92 V	272	46.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	113.3 PK			2.08 H	215	105.4	7.9
2	*6995.00	103.5 AV			2.08 H	215	95.6	7.9
3	#13990.00	47.7 PK	88.2	-40.5	2.23 H	174	31.0	16.7
4	#13990.00	35.4 AV	68.2	-32.8	2.23 H	174	18.7	16.7
5	20985.00	53.2 PK	74.0	-20.8	1.46 H	326	56.0	-2.8
6	20985.00	37.7 AV	54.0	-16.3	1.46 H	326	40.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.8 PK			1.38 V	324	104.9	7.9
2	*6995.00	103.5 AV			1.38 V	324	95.6	7.9
3	#13990.00	47.5 PK	88.2	-40.7	2.31 V	166	30.8	16.7
4	#13990.00	36.0 AV	68.2	-32.2	2.31 V	166	19.3	16.7
5	20985.00	56.3 PK	74.0	-17.7	3.92 V	295	59.1	-2.8
6	20985.00	44.0 AV	54.0	-10.0	3.92 V	295	46.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.2 PK			1.28 H	335	95.2	9.0
2	*7115.00	99.4 AV			1.28 H	335	90.4	9.0
3	#7125.00	65.3 PK	88.2	-22.9	1.28 H	335	56.3	9.0
4	#7125.00	58.0 AV	68.2	-10.2	1.28 H	335	49.0	9.0
5	7250.00	55.0 PK	74.0	-19.0	1.28 H	335	45.7	9.3
6	7250.00	45.1 AV	54.0	-8.9	1.28 H	335	35.8	9.3
7	#14230.00	47.1 PK	88.2	-41.1	2.18 H	186	30.2	16.9
8	#14230.00	35.1 AV	68.2	-33.1	2.18 H	186	18.2	16.9
9	21345.00	54.0 PK	74.0	-20.0	1.46 H	308	55.6	-1.6
10	21345.00	38.3 AV	54.0	-15.7	1.46 H	308	39.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.0 PK			1.79 V	24	96.0	9.0
2	*7115.00	100.1 AV			1.79 V	24	91.1	9.0
3	#7125.00	81.7 PK	88.2	-6.5	1.79 V	24	72.7	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.79 V	24	57.5	9.0
5	7250.00	54.9 PK	74.0	-19.1	1.79 V	24	45.6	9.3
6	7250.00	45.1 AV	54.0	-8.9	1.79 V	24	35.8	9.3
7	#14230.00	47.7 PK	88.2	-40.5	2.34 V	143	30.8	16.9
8	#14230.00	35.9 AV	68.2	-32.3	2.34 V	143	19.0	16.9
9	21345.00	56.1 PK	74.0	-17.9	3.88 V	275	57.7	-1.6
10	21345.00	43.4 AV	54.0	-10.6	3.88 V	275	45.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Mode A

1Tx NSS1 (SU)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.8 PK	88.2	-14.4	2.25 H	225	69.4	4.4
2	#5925.00	60.7 AV	68.2	-7.5	2.25 H	225	56.3	4.4
3	*5955.00	115.0 PK			2.25 H	225	110.5	4.5
4	*5955.00	102.6 AV			2.25 H	225	98.1	4.5
5	11910.00	47.3 PK	74.0	-26.7	2.21 H	197	33.6	13.7
6	11910.00	35.3 AV	54.0	-18.7	2.21 H	197	21.6	13.7
7	17865.00	54.3 PK	74.0	-19.7	1.44 H	312	30.0	24.3
8	17865.00	38.4 AV	54.0	-15.6	1.44 H	312	14.1	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	1.62 V	360	69.5	4.4
2	#5925.00	61.2 AV	68.2	-7.0	1.62 V	360	56.8	4.4
3	*5955.00	115.5 PK			1.62 V	360	111.0	4.5
4	*5955.00	102.6 AV			1.62 V	360	98.1	4.5
5	11910.00	47.4 PK	74.0	-26.6	2.36 V	146	33.7	13.7
6	11910.00	35.6 AV	54.0	-18.4	2.36 V	146	21.9	13.7
7	17865.00	56.5 PK	74.0	-17.5	3.90 V	274	32.2	24.3
8	17865.00	44.0 AV	54.0	-10.0	3.90 V	274	19.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.6 PK			2.23 H	230	109.8	4.8
2	*6195.00	102.2 AV			2.23 H	230	97.4	4.8
3	12390.00	47.7 PK	74.0	-26.3	2.24 H	186	33.8	13.9
4	12390.00	35.5 AV	54.0	-18.5	2.24 H	186	21.6	13.9
5	18585.00	53.8 PK	74.0	-20.2	1.50 H	315	58.8	-5.0
6	18585.00	38.0 AV	54.0	-16.0	1.50 H	315	43.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			1.63 V	360	110.5	4.8
2	*6195.00	102.2 AV			1.63 V	360	97.4	4.8
3	12390.00	47.3 PK	74.0	-26.7	2.36 V	153	33.4	13.9
4	12390.00	35.6 AV	54.0	-18.4	2.36 V	153	21.7	13.9
5	18585.00	56.3 PK	74.0	-17.7	3.88 V	283	61.3	-5.0
6	18585.00	43.7 AV	54.0	-10.3	3.88 V	283	48.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.0 PK			2.28 H	220	108.8	6.2
2	*6415.00	102.5 AV			2.28 H	220	96.3	6.2
3	#12830.00	48.1 PK	88.2	-40.1	2.28 H	174	33.6	14.5
4	#12830.00	36.0 AV	68.2	-32.2	2.28 H	174	21.5	14.5
5	19245.00	54.6 PK	74.0	-19.4	1.51 H	326	58.4	-3.8
6	19245.00	38.5 AV	54.0	-15.5	1.51 H	326	42.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.9 PK			1.62 V	360	109.7	6.2
2	*6415.00	102.7 AV			1.62 V	360	96.5	6.2
3	#12830.00	47.0 PK	88.2	-41.2	2.38 V	164	32.5	14.5
4	#12830.00	35.3 AV	68.2	-32.9	2.38 V	164	20.8	14.5
5	19245.00	56.1 PK	74.0	-17.9	3.83 V	296	59.9	-3.8
6	19245.00	43.7 AV	54.0	-10.3	3.83 V	296	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	114.8 PK			2.24 H	226	108.6	6.2
2	*6435.00	102.1 AV			2.24 H	226	95.9	6.2
3	#12870.00	47.9 PK	88.2	-40.3	2.25 H	195	33.2	14.7
4	#12870.00	35.8 AV	68.2	-32.4	2.25 H	195	21.1	14.7
5	19305.00	53.5 PK	74.0	-20.5	1.48 H	321	57.2	-3.7
6	19305.00	37.8 AV	54.0	-16.2	1.48 H	321	41.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.2 PK			1.68 V	360	109.0	6.2
2	*6435.00	102.1 AV			1.68 V	360	95.9	6.2
3	#12870.00	47.7 PK	88.2	-40.5	2.31 V	143	33.0	14.7
4	#12870.00	35.8 AV	68.2	-32.4	2.31 V	143	21.1	14.7
5	19305.00	56.7 PK	74.0	-17.3	3.84 V	280	60.4	-3.7
6	19305.00	43.8 AV	54.0	-10.2	3.84 V	280	47.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.0 PK			2.25 H	237	108.6	6.4
2	*6475.00	102.9 AV			2.25 H	237	96.5	6.4
3	#12950.00	47.9 PK	88.2	-40.3	2.27 H	173	33.2	14.7
4	#12950.00	35.5 AV	68.2	-32.7	2.27 H	173	20.8	14.7
5	19425.00	53.2 PK	74.0	-20.8	1.49 H	327	57.0	-3.8
6	19425.00	37.6 AV	54.0	-16.4	1.49 H	327	41.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.1 PK			1.59 V	360	108.7	6.4
2	*6475.00	102.2 AV			1.59 V	360	95.8	6.4
3	#12950.00	47.5 PK	88.2	-40.7	2.36 V	140	32.8	14.7
4	#12950.00	35.5 AV	68.2	-32.7	2.36 V	140	20.8	14.7
5	19425.00	56.1 PK	74.0	-17.9	3.83 V	290	59.9	-3.8
6	19425.00	43.4 AV	54.0	-10.6	3.83 V	290	47.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	114.9 PK			2.19 H	213	108.2	6.7
2	*6515.00	102.4 AV			2.19 H	213	95.7	6.7
3	#13030.00	47.3 PK	88.2	-40.9	2.27 H	199	32.7	14.6
4	#13030.00	35.4 AV	68.2	-32.8	2.27 H	199	20.8	14.6
5	19545.00	53.6 PK	74.0	-20.4	1.47 H	310	57.7	-4.1
6	19545.00	37.9 AV	54.0	-16.1	1.47 H	310	42.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.5 PK			1.60 V	352	108.8	6.7
2	*6515.00	102.6 AV			1.60 V	352	95.9	6.7
3	#13030.00	47.1 PK	88.2	-41.1	2.32 V	142	32.5	14.6
4	#13030.00	35.1 AV	68.2	-33.1	2.32 V	142	20.5	14.6
5	19545.00	56.0 PK	74.0	-18.0	3.88 V	292	60.1	-4.1
6	19545.00	43.4 AV	54.0	-10.6	3.88 V	292	47.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.0 PK			2.23 H	239	108.2	6.8
2	*6535.00	102.5 AV			2.23 H	239	95.7	6.8
3	#13070.00	47.6 PK	88.2	-40.6	2.23 H	184	32.9	14.7
4	#13070.00	35.4 AV	68.2	-32.8	2.23 H	184	20.7	14.7
5	19605.00	53.6 PK	74.0	-20.4	1.53 H	313	57.6	-4.0
6	19605.00	37.9 AV	54.0	-16.1	1.53 H	313	41.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.9 PK			1.58 V	360	108.1	6.8
2	*6535.00	101.7 AV			1.58 V	360	94.9	6.8
3	#13070.00	47.5 PK	88.2	-40.7	2.33 V	165	32.8	14.7
4	#13070.00	35.9 AV	68.2	-32.3	2.33 V	165	21.2	14.7
5	19605.00	57.0 PK	74.0	-17.0	3.89 V	287	61.0	-4.0
6	19605.00	44.1 AV	54.0	-9.9	3.89 V	287	48.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.9 PK			2.20 H	231	107.9	7.0
2	*6695.00	102.3 AV			2.20 H	231	95.3	7.0
3	13390.00	47.7 PK	74.0	-26.3	2.29 H	180	32.4	15.3
4	13390.00	35.4 AV	54.0	-18.6	2.29 H	180	20.1	15.3
5	20085.00	53.7 PK	74.0	-20.3	1.46 H	304	57.2	-3.5
6	20085.00	37.7 AV	54.0	-16.3	1.46 H	304	41.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.7 PK			1.66 V	360	108.7	7.0
2	*6695.00	102.5 AV			1.66 V	360	95.5	7.0
3	13390.00	47.6 PK	74.0	-26.4	2.34 V	166	32.3	15.3
4	13390.00	35.8 AV	54.0	-18.2	2.34 V	166	20.5	15.3
5	20085.00	55.8 PK	74.0	-18.2	3.89 V	273	59.3	-3.5
6	20085.00	43.3 AV	54.0	-10.7	3.89 V	273	46.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.5 PK			2.28 H	210	107.5	7.0
2	*6855.00	102.2 AV			2.28 H	210	95.2	7.0
3	#13710.00	48.3 PK	88.2	-39.9	2.19 H	191	32.0	16.3
4	#13710.00	36.0 AV	68.2	-32.2	2.19 H	191	19.7	16.3
5	20565.00	53.3 PK	74.0	-20.7	1.54 H	309	56.6	-3.3
6	20565.00	37.5 AV	54.0	-16.5	1.54 H	309	40.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.5 PK			1.63 V	359	108.5	7.0
2	*6855.00	102.5 AV			1.63 V	359	95.5	7.0
3	#13710.00	47.6 PK	88.2	-40.6	2.35 V	165	31.3	16.3
4	#13710.00	35.6 AV	68.2	-32.6	2.35 V	165	19.3	16.3
5	20565.00	56.3 PK	74.0	-17.7	3.91 V	288	59.6	-3.3
6	20565.00	43.6 AV	54.0	-10.4	3.91 V	288	46.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.5 PK			2.29 H	213	108.4	7.1
2	*6875.00	102.9 AV			2.29 H	213	95.8	7.1
3	#13750.00	47.5 PK	88.2	-40.7	2.20 H	187	31.4	16.1
4	#13750.00	35.5 AV	68.2	-32.7	2.20 H	187	19.4	16.1
5	20625.00	53.9 PK	74.0	-20.1	1.54 H	320	57.2	-3.3
6	20625.00	37.8 AV	54.0	-16.2	1.54 H	320	41.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.6 PK			1.63 V	360	108.5	7.1
2	*6875.00	102.6 AV			1.63 V	360	95.5	7.1
3	#13750.00	47.5 PK	88.2	-40.7	2.41 V	142	31.4	16.1
4	#13750.00	35.8 AV	68.2	-32.4	2.41 V	142	19.7	16.1
5	20625.00	56.5 PK	74.0	-17.5	3.92 V	269	59.8	-3.3
6	20625.00	43.7 AV	54.0	-10.3	3.92 V	269	47.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	114.8 PK			2.25 H	230	106.9	7.9
2	*6995.00	102.6 AV			2.25 H	230	94.7	7.9
3	#13990.00	48.3 PK	88.2	-39.9	2.23 H	173	31.6	16.7
4	#13990.00	35.9 AV	68.2	-32.3	2.23 H	173	19.2	16.7
5	20985.00	53.7 PK	74.0	-20.3	1.44 H	319	56.5	-2.8
6	20985.00	37.7 AV	54.0	-16.3	1.44 H	319	40.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.5 PK			1.69 V	353	107.6	7.9
2	*6995.00	102.3 AV			1.69 V	353	94.4	7.9
3	#13990.00	47.3 PK	88.2	-40.9	2.42 V	144	30.6	16.7
4	#13990.00	35.7 AV	68.2	-32.5	2.42 V	144	19.0	16.7
5	20985.00	56.7 PK	74.0	-17.3	3.91 V	283	59.5	-2.8
6	20985.00	43.8 AV	54.0	-10.2	3.91 V	283	46.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.2 PK			1.15 H	220	92.2	9.0
2	*7115.00	90.8 AV			1.15 H	220	81.8	9.0
3	#7125.00	84.8 PK	88.2	-3.4	1.15 H	220	75.8	9.0
4	#7125.00	65.2 AV	68.2	-3.0	1.15 H	220	56.2	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.15 H	220	46.7	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.15 H	220	34.4	9.3
7	#14230.00	48.1 PK	88.2	-40.1	2.22 H	173	31.2	16.9
8	#14230.00	35.9 AV	68.2	-32.3	2.22 H	173	19.0	16.9
9	21345.00	53.1 PK	74.0	-20.9	1.52 H	329	54.7	-1.6
10	21345.00	37.5 AV	54.0	-16.5	1.52 H	329	39.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.5 PK			1.15 V	237	87.5	9.0
2	*7115.00	89.1 AV			1.15 V	237	80.1	9.0
3	#7125.00	84.7 PK	88.2	-3.5	1.15 V	237	75.7	9.0
4	#7125.00	59.0 AV	68.2	-9.2	1.15 V	237	50.0	9.0
5	7250.00	55.8 PK	74.0	-18.2	1.15 V	237	46.5	9.3
6	7250.00	43.0 AV	54.0	-11.0	1.15 V	237	33.7	9.3
7	#14230.00	47.4 PK	88.2	-40.8	2.34 V	150	30.5	16.9
8	#14230.00	35.6 AV	68.2	-32.6	2.34 V	150	18.7	16.9
9	21345.00	56.4 PK	74.0	-17.6	3.84 V	272	58.0	-1.6
10	21345.00	43.8 AV	54.0	-10.2	3.84 V	272	45.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.6 PK	88.2	-9.6	2.13 H	225	74.2	4.4
2	#5925.00	64.8 AV	68.2	-3.4	2.13 H	225	60.4	4.4
3	*5965.00	109.3 PK			2.13 H	225	104.8	4.5
4	*5965.00	97.1 AV			2.13 H	225	92.6	4.5
5	11930.00	47.6 PK	74.0	-26.4	2.28 H	191	33.9	13.7
6	11930.00	35.6 AV	54.0	-18.4	2.28 H	191	21.9	13.7
7	17895.00	53.7 PK	74.0	-20.3	1.49 H	316	28.8	24.9
8	17895.00	38.0 AV	54.0	-16.0	1.49 H	316	13.1	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.4 PK	88.2	-11.8	1.25 V	325	72.0	4.4
2	#5925.00	63.2 AV	68.2	-5.0	1.25 V	325	58.8	4.4
3	*5965.00	108.7 PK			1.25 V	325	104.2	4.5
4	*5965.00	96.5 AV			1.25 V	325	92.0	4.5
5	11930.00	47.3 PK	74.0	-26.7	2.31 V	158	33.6	13.7
6	11930.00	35.5 AV	54.0	-18.5	2.31 V	158	21.8	13.7
7	17895.00	56.3 PK	74.0	-17.7	3.89 V	285	31.4	24.9
8	17895.00	43.8 AV	54.0	-10.2	3.89 V	285	18.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	109.0 PK			2.11 H	235	104.1	4.9
2	*6205.00	96.9 AV			2.11 H	235	92.0	4.9
3	12410.00	47.8 PK	74.0	-26.2	2.29 H	197	34.0	13.8
4	12410.00	35.7 AV	54.0	-18.3	2.29 H	197	21.9	13.8
5	18615.00	53.8 PK	74.0	-20.2	1.48 H	327	58.7	-4.9
6	18615.00	38.0 AV	54.0	-16.0	1.48 H	327	42.9	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	108.9 PK			1.27 V	320	104.0	4.9
2	*6205.00	96.7 AV			1.27 V	320	91.8	4.9
3	12410.00	47.1 PK	74.0	-26.9	2.30 V	139	33.3	13.8
4	12410.00	35.2 AV	54.0	-18.8	2.30 V	139	21.4	13.8
5	18615.00	56.0 PK	74.0	-18.0	3.93 V	285	60.9	-4.9
6	18615.00	43.6 AV	54.0	-10.4	3.93 V	285	48.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	109.3 PK			2.11 H	237	103.1	6.2
2	*6405.00	97.1 AV			2.11 H	237	90.9	6.2
3	#12810.00	47.5 PK	88.2	-40.7	2.21 H	191	33.1	14.4
4	#12810.00	35.3 AV	68.2	-32.9	2.21 H	191	20.9	14.4
5	19215.00	53.7 PK	74.0	-20.3	1.53 H	311	57.4	-3.7
6	19215.00	38.0 AV	54.0	-16.0	1.53 H	311	41.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.9 PK			1.24 V	315	102.7	6.2
2	*6405.00	96.8 AV			1.24 V	315	90.6	6.2
3	#12810.00	47.2 PK	88.2	-41.0	2.41 V	143	32.8	14.4
4	#12810.00	35.7 AV	68.2	-32.5	2.41 V	143	21.3	14.4
5	19215.00	55.8 PK	74.0	-18.2	3.94 V	294	59.5	-3.7
6	19215.00	43.5 AV	54.0	-10.5	3.94 V	294	47.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	109.7 PK			2.08 H	227	103.5	6.2
2	*6445.00	97.4 AV			2.08 H	227	91.2	6.2
3	#12890.00	47.2 PK	88.2	-41.0	2.22 H	182	32.5	14.7
4	#12890.00	35.1 AV	68.2	-33.1	2.22 H	182	20.4	14.7
5	19335.00	53.8 PK	74.0	-20.2	1.55 H	319	57.5	-3.7
6	19335.00	38.2 AV	54.0	-15.8	1.55 H	319	41.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.7 PK			1.28 V	310	102.5	6.2
2	*6445.00	96.5 AV			1.28 V	310	90.3	6.2
3	#12890.00	47.1 PK	88.2	-41.1	2.35 V	147	32.4	14.7
4	#12890.00	35.2 AV	68.2	-33.0	2.35 V	147	20.5	14.7
5	19335.00	55.8 PK	74.0	-18.2	3.89 V	273	59.5	-3.7
6	19335.00	43.4 AV	54.0	-10.6	3.89 V	273	47.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.7 PK			2.09 H	217	103.2	6.5
2	*6485.00	97.3 AV			2.09 H	217	90.8	6.5
3	#12970.00	48.1 PK	88.2	-40.1	2.26 H	196	33.5	14.6
4	#12970.00	35.8 AV	68.2	-32.4	2.26 H	196	21.2	14.6
5	19455.00	53.3 PK	74.0	-20.7	1.47 H	308	57.2	-3.9
6	19455.00	37.6 AV	54.0	-16.4	1.47 H	308	41.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	109.0 PK			1.21 V	319	102.5	6.5
2	*6485.00	96.5 AV			1.21 V	319	90.0	6.5
3	#12970.00	47.8 PK	88.2	-40.4	2.35 V	166	33.2	14.6
4	#12970.00	35.9 AV	68.2	-32.3	2.35 V	166	21.3	14.6
5	19455.00	55.7 PK	74.0	-18.3	3.89 V	279	59.6	-3.9
6	19455.00	43.3 AV	54.0	-10.7	3.89 V	279	47.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	109.5 PK			2.10 H	212	102.7	6.8
2	*6525.00	97.3 AV			2.10 H	212	90.5	6.8
3	#13050.00	47.4 PK	88.2	-40.8	2.25 H	179	32.8	14.6
4	#13050.00	35.4 AV	68.2	-32.8	2.25 H	179	20.8	14.6
5	19575.00	53.5 PK	74.0	-20.5	1.45 H	315	57.6	-4.1
6	19575.00	37.9 AV	54.0	-16.1	1.45 H	315	42.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.4 PK			1.25 V	319	101.6	6.8
2	*6525.00	96.2 AV			1.25 V	319	89.4	6.8
3	#13050.00	47.7 PK	88.2	-40.5	2.32 V	158	33.1	14.6
4	#13050.00	35.7 AV	68.2	-32.5	2.32 V	158	21.1	14.6
5	19575.00	56.7 PK	74.0	-17.3	3.91 V	282	60.8	-4.1
6	19575.00	44.1 AV	54.0	-9.9	3.91 V	282	48.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.6 PK			2.16 H	210	102.8	6.8
2	*6565.00	97.2 AV			2.16 H	210	90.4	6.8
3	#13130.00	47.1 PK	88.2	-41.1	2.24 H	196	32.4	14.7
4	#13130.00	35.0 AV	68.2	-33.2	2.24 H	196	20.3	14.7
5	19695.00	54.0 PK	74.0	-20.0	1.51 H	323	57.9	-3.9
6	19695.00	38.1 AV	54.0	-15.9	1.51 H	323	42.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	109.2 PK			1.21 V	331	102.4	6.8
2	*6565.00	96.9 AV			1.21 V	331	90.1	6.8
3	#13130.00	47.4 PK	88.2	-40.8	2.31 V	142	32.7	14.7
4	#13130.00	35.5 AV	68.2	-32.7	2.31 V	142	20.8	14.7
5	19695.00	56.7 PK	74.0	-17.3	3.83 V	278	60.6	-3.9
6	19695.00	44.1 AV	54.0	-9.9	3.83 V	278	48.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	109.2 PK			2.19 H	236	102.3	6.9
2	*6685.00	97.3 AV			2.19 H	236	90.4	6.9
3	13370.00	47.2 PK	74.0	-26.8	2.22 H	194	32.0	15.2
4	13370.00	35.3 AV	54.0	-18.7	2.22 H	194	20.1	15.2
5	20055.00	54.4 PK	74.0	-19.6	1.52 H	317	57.9	-3.5
6	20055.00	38.4 AV	54.0	-15.6	1.52 H	317	41.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	108.5 PK			1.25 V	310	101.6	6.9
2	*6685.00	96.4 AV			1.25 V	310	89.5	6.9
3	13370.00	47.2 PK	74.0	-26.8	2.36 V	151	32.0	15.2
4	13370.00	35.3 AV	54.0	-18.7	2.36 V	151	20.1	15.2
5	20055.00	56.9 PK	74.0	-17.1	3.83 V	269	60.4	-3.5
6	20055.00	44.1 AV	54.0	-9.9	3.83 V	269	47.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.0 PK			2.13 H	240	103.0	7.0
2	*6845.00	97.6 AV			2.13 H	240	90.6	7.0
3	#13690.00	46.7 PK	88.2	-41.5	2.22 H	186	30.4	16.3
4	#13690.00	35.1 AV	68.2	-33.1	2.22 H	186	18.8	16.3
5	20535.00	54.7 PK	74.0	-19.3	1.51 H	303	57.9	-3.2
6	20535.00	38.6 AV	54.0	-15.4	1.51 H	303	41.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.9 PK			1.25 V	335	101.9	7.0
2	*6845.00	96.4 AV			1.25 V	335	89.4	7.0
3	#13690.00	47.3 PK	88.2	-40.9	2.38 V	165	31.0	16.3
4	#13690.00	35.6 AV	68.2	-32.6	2.38 V	165	19.3	16.3
5	20535.00	56.4 PK	74.0	-17.6	3.90 V	281	59.6	-3.2
6	20535.00	43.5 AV	54.0	-10.5	3.90 V	281	46.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.7 PK			2.11 H	228	102.6	7.1
2	*6885.00	97.4 AV			2.11 H	228	90.3	7.1
3	#13770.00	46.7 PK	88.2	-41.5	2.20 H	194	30.8	15.9
4	#13770.00	35.0 AV	68.2	-33.2	2.20 H	194	19.1	15.9
5	20655.00	54.3 PK	74.0	-19.7	1.56 H	321	57.6	-3.3
6	20655.00	38.5 AV	54.0	-15.5	1.56 H	321	41.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	109.1 PK			1.27 V	309	102.0	7.1
2	*6885.00	96.7 AV			1.27 V	309	89.6	7.1
3	#13770.00	46.7 PK	88.2	-41.5	2.36 V	158	30.8	15.9
4	#13770.00	35.2 AV	68.2	-33.0	2.36 V	158	19.3	15.9
5	20655.00	55.8 PK	74.0	-18.2	3.88 V	281	59.1	-3.3
6	20655.00	43.4 AV	54.0	-10.6	3.88 V	281	46.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	109.3 PK			2.18 H	213	101.6	7.7
2	*6965.00	97.3 AV			2.18 H	213	89.6	7.7
3	#13930.00	46.8 PK	88.2	-41.4	2.25 H	180	30.3	16.5
4	#13930.00	34.8 AV	68.2	-33.4	2.25 H	180	18.3	16.5
5	20895.00	54.4 PK	74.0	-19.6	1.48 H	326	57.1	-2.7
6	20895.00	38.7 AV	54.0	-15.3	1.48 H	326	41.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	108.7 PK			1.23 V	335	101.0	7.7
2	*6965.00	96.6 AV			1.23 V	335	88.9	7.7
3	#13930.00	47.5 PK	88.2	-40.7	2.32 V	151	31.0	16.5
4	#13930.00	36.0 AV	68.2	-32.2	2.32 V	151	19.5	16.5
5	20895.00	55.9 PK	74.0	-18.1	3.93 V	282	58.6	-2.7
6	20895.00	43.5 AV	54.0	-10.5	3.93 V	282	46.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	112.4 PK			1.20 H	220	103.7	8.7
2	*7085.00	99.5 AV			1.20 H	220	90.8	8.7
3	#7125.00	77.1 PK	88.2	-11.1	1.20 H	220	68.1	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.20 H	220	55.7	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.20 H	220	46.8	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.20 H	220	34.5	9.3
7	#14170.00	46.9 PK	88.2	-41.3	2.18 H	191	30.4	16.5
8	#14170.00	35.0 AV	68.2	-33.2	2.18 H	191	18.5	16.5
9	21255.00	54.2 PK	74.0	-19.8	1.49 H	305	55.6	-1.4
10	21255.00	38.4 AV	54.0	-15.6	1.49 H	305	39.8	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.7 PK			1.17 V	239	98.0	8.7
2	*7085.00	97.2 AV			1.17 V	239	88.5	8.7
3	#7125.00	72.9 PK	88.2	-15.3	1.17 V	239	63.9	9.0
4	#7125.00	62.3 AV	68.2	-5.9	1.17 V	239	53.3	9.0
5	7250.00	55.3 PK	74.0	-18.7	1.17 V	239	46.0	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.17 V	239	34.5	9.3
7	#14170.00	47.1 PK	88.2	-41.1	2.34 V	145	30.6	16.5
8	#14170.00	35.6 AV	68.2	-32.6	2.34 V	145	19.1	16.5
9	21255.00	56.2 PK	74.0	-17.8	3.94 V	290	57.6	-1.4
10	21255.00	43.8 AV	54.0	-10.2	3.94 V	290	45.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.7 PK	88.2	-10.5	2.21 H	225	73.3	4.4
2	#5925.00	64.0 AV	68.2	-4.2	2.21 H	225	59.6	4.4
3	*5985.00	106.9 PK			2.21 H	225	102.3	4.6
4	*5985.00	96.7 AV			2.21 H	225	92.1	4.6
5	11970.00	47.5 PK	74.0	-26.5	2.19 H	192	33.7	13.8
6	11970.00	35.4 AV	54.0	-18.6	2.19 H	192	21.6	13.8
7	17955.00	54.6 PK	74.0	-19.4	1.47 H	320	27.9	26.7
8	17955.00	38.6 AV	54.0	-15.4	1.47 H	320	11.9	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.0 PK	88.2	-12.2	1.39 V	329	71.6	4.4
2	#5925.00	65.1 AV	68.2	-3.1	1.39 V	329	60.7	4.4
3	*5985.00	104.9 PK			1.39 V	329	100.3	4.6
4	*5985.00	93.6 AV			1.39 V	329	89.0	4.6
5	11970.00	47.3 PK	74.0	-26.7	2.30 V	158	33.5	13.8
6	11970.00	35.7 AV	54.0	-18.3	2.30 V	158	21.9	13.8
7	17955.00	56.1 PK	74.0	-17.9	3.83 V	287	29.4	26.7
8	17955.00	43.4 AV	54.0	-10.6	3.83 V	287	16.7	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.5 PK			2.16 H	239	105.3	5.2
2	*6225.00	96.6 AV			2.16 H	239	91.4	5.2
3	12450.00	46.8 PK	74.0	-27.2	2.24 H	180	33.1	13.7
4	12450.00	35.0 AV	54.0	-19.0	2.24 H	180	21.3	13.7
5	18675.00	54.6 PK	74.0	-19.4	1.58 H	329	59.5	-4.9
6	18675.00	38.6 AV	54.0	-15.4	1.58 H	329	43.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.5 PK			1.46 V	328	102.3	5.2
2	*6225.00	95.8 AV			1.46 V	328	90.6	5.2
3	12450.00	48.1 PK	74.0	-25.9	2.37 V	140	34.4	13.7
4	12450.00	36.1 AV	54.0	-17.9	2.37 V	140	22.4	13.7
5	18675.00	56.5 PK	74.0	-17.5	3.87 V	274	61.4	-4.9
6	18675.00	44.2 AV	54.0	-9.8	3.87 V	274	49.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.7 PK			2.23 H	236	104.6	6.1
2	*6385.00	96.6 AV			2.23 H	236	90.5	6.1
3	#12770.00	47.6 PK	88.2	-40.6	2.23 H	206	33.3	14.3
4	#12770.00	35.6 AV	68.2	-32.6	2.23 H	206	21.3	14.3
5	19155.00	54.9 PK	74.0	-19.1	1.50 H	318	58.7	-3.8
6	19155.00	38.8 AV	54.0	-15.2	1.50 H	318	42.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.5 PK			1.47 V	325	101.4	6.1
2	*6385.00	95.7 AV			1.47 V	325	89.6	6.1
3	#12770.00	47.9 PK	88.2	-40.3	2.37 V	151	33.6	14.3
4	#12770.00	36.0 AV	68.2	-32.2	2.37 V	151	21.7	14.3
5	19155.00	56.5 PK	74.0	-17.5	3.82 V	289	60.3	-3.8
6	19155.00	43.6 AV	54.0	-10.4	3.82 V	289	47.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.7 PK			2.18 H	213	104.4	6.3
2	*6465.00	96.4 AV			2.18 H	213	90.1	6.3
3	#12930.00	47.6 PK	88.2	-40.6	2.26 H	181	32.8	14.8
4	#12930.00	35.7 AV	68.2	-32.5	2.26 H	181	20.9	14.8
5	19395.00	54.7 PK	74.0	-19.3	1.57 H	331	58.4	-3.7
6	19395.00	38.7 AV	54.0	-15.3	1.57 H	331	42.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.2 PK			1.48 V	336	100.9	6.3
2	*6465.00	95.5 AV			1.48 V	336	89.2	6.3
3	#12930.00	47.2 PK	88.2	-41.0	2.40 V	157	32.4	14.8
4	#12930.00	35.5 AV	68.2	-32.7	2.40 V	157	20.7	14.8
5	19395.00	55.8 PK	74.0	-18.2	3.87 V	288	59.5	-3.7
6	19395.00	43.3 AV	54.0	-10.7	3.87 V	288	47.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.4 PK			2.23 H	211	103.5	6.9
2	*6545.00	96.5 AV			2.23 H	211	89.6	6.9
3	#13090.00	47.4 PK	88.2	-40.8	2.26 H	189	32.8	14.6
4	#13090.00	35.6 AV	68.2	-32.6	2.26 H	189	21.0	14.6
5	19635.00	54.3 PK	74.0	-19.7	1.50 H	318	58.3	-4.0
6	19635.00	38.5 AV	54.0	-15.5	1.50 H	318	42.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.8 PK			1.50 V	339	100.9	6.9
2	*6545.00	96.1 AV			1.50 V	339	89.2	6.9
3	#13090.00	47.3 PK	88.2	-40.9	2.38 V	143	32.7	14.6
4	#13090.00	35.4 AV	68.2	-32.8	2.38 V	143	20.8	14.6
5	19635.00	55.9 PK	74.0	-18.1	3.82 V	283	59.9	-4.0
6	19635.00	43.5 AV	54.0	-10.5	3.82 V	283	47.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.1 PK			2.26 H	212	104.4	6.7
2	*6625.00	97.0 AV			2.26 H	212	90.3	6.7
3	13250.00	46.6 PK	74.0	-27.4	2.20 H	186	31.6	15.0
4	13250.00	34.9 AV	54.0	-19.1	2.20 H	186	19.9	15.0
5	19875.00	54.4 PK	74.0	-19.6	1.46 H	316	57.9	-3.5
6	19875.00	38.1 AV	54.0	-15.9	1.46 H	316	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.4 PK			1.50 V	322	100.7	6.7
2	*6625.00	95.7 AV			1.50 V	322	89.0	6.7
3	13250.00	47.5 PK	74.0	-26.5	2.33 V	158	32.5	15.0
4	13250.00	35.6 AV	54.0	-18.4	2.33 V	158	20.6	15.0
5	19875.00	55.8 PK	74.0	-18.2	3.85 V	279	59.3	-3.5
6	19875.00	43.3 AV	54.0	-10.7	3.85 V	279	46.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			2.20 H	223	103.9	7.0
2	*6705.00	96.4 AV			2.20 H	223	89.4	7.0
3	#13410.00	47.3 PK	88.2	-40.9	2.18 H	188	32.0	15.3
4	#13410.00	35.2 AV	68.2	-33.0	2.18 H	188	19.9	15.3
5	20115.00	53.8 PK	74.0	-20.2	1.48 H	309	57.3	-3.5
6	20115.00	37.9 AV	54.0	-16.1	1.48 H	309	41.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.1 PK			1.42 V	332	100.1	7.0
2	*6705.00	95.6 AV			1.42 V	332	88.6	7.0
3	#13410.00	46.8 PK	88.2	-41.4	2.40 V	159	31.5	15.3
4	#13410.00	35.1 AV	68.2	-33.1	2.40 V	159	19.8	15.3
5	20115.00	56.9 PK	74.0	-17.1	3.84 V	276	60.4	-3.5
6	20115.00	44.1 AV	54.0	-9.9	3.84 V	276	47.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	111.1 PK			2.22 H	216	104.0	7.1
2	*6785.00	97.0 AV			2.22 H	216	89.9	7.1
3	#13570.00	47.3 PK	88.2	-40.9	2.21 H	206	31.0	16.3
4	#13570.00	35.4 AV	68.2	-32.8	2.21 H	206	19.1	16.3
5	20355.00	54.5 PK	74.0	-19.5	1.49 H	320	57.6	-3.1
6	20355.00	38.6 AV	54.0	-15.4	1.49 H	320	41.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.2 PK			1.51 V	344	100.1	7.1
2	*6785.00	95.3 AV			1.51 V	344	88.2	7.1
3	#13570.00	47.3 PK	88.2	-40.9	2.41 V	154	31.0	16.3
4	#13570.00	35.6 AV	68.2	-32.6	2.41 V	154	19.3	16.3
5	20355.00	56.0 PK	74.0	-18.0	3.91 V	288	59.1	-3.1
6	20355.00	43.5 AV	54.0	-10.5	3.91 V	288	46.6	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.0 PK			2.25 H	224	103.9	7.1
2	*6865.00	96.8 AV			2.25 H	224	89.7	7.1
3	#13730.00	47.7 PK	88.2	-40.5	2.23 H	190	31.6	16.1
4	#13730.00	35.5 AV	68.2	-32.7	2.23 H	190	19.4	16.1
5	20595.00	54.0 PK	74.0	-20.0	1.51 H	320	57.3	-3.3
6	20595.00	38.0 AV	54.0	-16.0	1.51 H	320	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.1 PK			1.46 V	317	100.0	7.1
2	*6865.00	95.5 AV			1.46 V	317	88.4	7.1
3	#13730.00	46.9 PK	88.2	-41.3	2.35 V	164	30.8	16.1
4	#13730.00	35.2 AV	68.2	-33.0	2.35 V	164	19.1	16.1
5	20595.00	56.5 PK	74.0	-17.5	3.87 V	296	59.8	-3.3
6	20595.00	43.8 AV	54.0	-10.2	3.87 V	296	47.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.2 PK			2.25 H	228	103.7	7.5
2	*6945.00	96.8 AV			2.25 H	228	89.3	7.5
3	#13890.00	47.8 PK	88.2	-40.4	2.20 H	185	31.3	16.5
4	#13890.00	35.7 AV	68.2	-32.5	2.20 H	185	19.2	16.5
5	20835.00	54.8 PK	74.0	-19.2	1.54 H	323	57.7	-2.9
6	20835.00	38.7 AV	54.0	-15.3	1.54 H	323	41.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.6 PK			1.46 V	314	100.1	7.5
2	*6945.00	95.6 AV			1.46 V	314	88.1	7.5
3	#13890.00	48.0 PK	88.2	-40.2	2.31 V	149	31.5	16.5
4	#13890.00	36.0 AV	68.2	-32.2	2.31 V	149	19.5	16.5
5	20835.00	56.4 PK	74.0	-17.6	3.90 V	269	59.3	-2.9
6	20835.00	43.9 AV	54.0	-10.1	3.90 V	269	46.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.9 PK			1.49 H	198	102.6	8.3
2	*7025.00	98.4 AV			1.49 H	198	90.1	8.3
3	#7125.00	76.9 PK	88.2	-11.3	1.49 H	198	67.9	9.0
4	#7125.00	63.7 AV	68.2	-4.5	1.49 H	198	54.7	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.49 H	198	46.8	9.3
6	7250.00	44.1 AV	54.0	-9.9	1.49 H	198	34.8	9.3
7	#14050.00	47.3 PK	88.2	-40.9	2.16 H	202	30.7	16.6
8	#14050.00	35.7 AV	68.2	-32.5	2.16 H	202	19.1	16.6
9	21075.00	54.3 PK	74.0	-19.7	1.55 H	309	56.5	-2.2
10	21075.00	38.5 AV	54.0	-15.5	1.55 H	309	40.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.0 PK			1.27 V	236	99.7	8.3
2	*7025.00	98.6 AV			1.27 V	236	90.3	8.3
3	#7125.00	73.7 PK	88.2	-14.5	1.27 V	236	64.7	9.0
4	#7125.00	62.8 AV	68.2	-5.4	1.27 V	236	53.8	9.0
5	7250.00	55.0 PK	74.0	-19.0	1.27 V	236	45.7	9.3
6	7250.00	44.3 AV	54.0	-9.7	1.27 V	236	35.0	9.3
7	#14050.00	47.6 PK	88.2	-40.6	2.30 V	151	31.0	16.6
8	#14050.00	36.1 AV	68.2	-32.1	2.30 V	151	19.5	16.6
9	21075.00	56.2 PK	74.0	-17.8	3.90 V	273	58.4	-2.2
10	21075.00	43.8 AV	54.0	-10.2	3.90 V	273	46.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.0 PK	88.2	-11.2	2.10 H	225	72.6	4.4
2	#5925.00	65.1 AV	68.2	-3.1	2.10 H	225	60.7	4.4
3	*6025.00	104.4 PK			2.10 H	225	99.9	4.5
4	*6025.00	91.9 AV			2.10 H	225	87.4	4.5
5	12050.00	47.4 PK	74.0	-26.6	2.28 H	208	33.3	14.1
6	12050.00	35.4 AV	54.0	-18.6	2.28 H	208	21.3	14.1
7	18075.00	54.6 PK	74.0	-19.4	1.51 H	324	59.3	-4.7
8	18075.00	38.9 AV	54.0	-15.1	1.51 H	324	43.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.40 V	320	72.4	4.4
2	#5925.00	64.9 AV	68.2	-3.3	1.40 V	320	60.5	4.4
3	*6025.00	104.5 PK			1.40 V	320	100.0	4.5
4	*6025.00	91.5 AV			1.40 V	320	87.0	4.5
5	12050.00	47.2 PK	74.0	-26.8	2.36 V	151	33.1	14.1
6	12050.00	35.7 AV	54.0	-18.3	2.36 V	151	21.6	14.1
7	18075.00	56.6 PK	74.0	-17.4	3.93 V	268	61.3	-4.7
8	18075.00	44.1 AV	54.0	-9.9	3.93 V	268	48.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	103.9 PK			2.16 H	232	99.1	4.8
2	*6185.00	91.6 AV			2.16 H	232	86.8	4.8
3	12370.00	47.4 PK	74.0	-26.6	2.22 H	190	33.4	14.0
4	12370.00	35.6 AV	54.0	-18.4	2.22 H	190	21.6	14.0
5	18555.00	54.2 PK	74.0	-19.8	1.57 H	314	59.1	-4.9
6	18555.00	38.1 AV	54.0	-15.9	1.57 H	314	43.0	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.7 PK			1.40 V	305	99.9	4.8
2	*6185.00	91.8 AV			1.40 V	305	87.0	4.8
3	12370.00	47.0 PK	74.0	-27.0	2.40 V	146	33.0	14.0
4	12370.00	35.4 AV	54.0	-18.6	2.40 V	146	21.4	14.0
5	18555.00	55.6 PK	74.0	-18.4	3.88 V	276	60.5	-4.9
6	18555.00	43.3 AV	54.0	-10.7	3.88 V	276	48.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.6 PK			2.10 H	237	98.6	6.0
2	*6345.00	92.2 AV			2.10 H	237	86.2	6.0
3	12690.00	46.8 PK	74.0	-27.2	2.27 H	186	32.7	14.1
4	12690.00	34.9 AV	54.0	-19.1	2.27 H	186	20.8	14.1
5	19035.00	54.0 PK	74.0	-20.0	1.51 H	313	57.9	-3.9
6	19035.00	38.2 AV	54.0	-15.8	1.51 H	313	42.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.6 PK			1.35 V	322	98.6	6.0
2	*6345.00	91.7 AV			1.35 V	322	85.7	6.0
3	12690.00	47.9 PK	74.0	-26.1	2.42 V	148	33.8	14.1
4	12690.00	36.0 AV	54.0	-18.0	2.42 V	148	21.9	14.1
5	19035.00	56.4 PK	74.0	-17.6	3.86 V	290	60.3	-3.9
6	19035.00	43.5 AV	54.0	-10.5	3.86 V	290	47.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.6 PK			2.11 H	216	97.9	6.7
2	*6505.00	92.0 AV			2.11 H	216	85.3	6.7
3	#13010.00	47.4 PK	88.2	-40.8	2.18 H	179	32.8	14.6
4	#13010.00	35.5 AV	68.2	-32.7	2.18 H	179	20.9	14.6
5	19515.00	54.3 PK	74.0	-19.7	1.53 H	306	58.4	-4.1
6	19515.00	38.2 AV	54.0	-15.8	1.53 H	306	42.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.3 PK			1.45 V	328	97.6	6.7
2	*6505.00	91.4 AV			1.45 V	328	84.7	6.7
3	#13010.00	47.3 PK	88.2	-40.9	2.30 V	162	32.7	14.6
4	#13010.00	35.7 AV	68.2	-32.5	2.30 V	162	21.1	14.6
5	19515.00	56.4 PK	74.0	-17.6	3.94 V	281	60.5	-4.1
6	19515.00	43.7 AV	54.0	-10.3	3.94 V	281	47.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			2.10 H	227	97.8	6.9
2	*6665.00	92.2 AV			2.10 H	227	85.3	6.9
3	13330.00	47.1 PK	74.0	-26.9	2.22 H	196	32.0	15.1
4	13330.00	35.4 AV	54.0	-18.6	2.22 H	196	20.3	15.1
5	19995.00	54.4 PK	74.0	-19.6	1.57 H	302	58.0	-3.6
6	19995.00	38.3 AV	54.0	-15.7	1.57 H	302	41.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			1.35 V	304	97.8	6.9
2	*6665.00	91.8 AV			1.35 V	304	84.9	6.9
3	13330.00	47.3 PK	74.0	-26.7	2.38 V	138	32.2	15.1
4	13330.00	35.5 AV	54.0	-18.5	2.38 V	138	20.4	15.1
5	19995.00	56.4 PK	74.0	-17.6	3.92 V	294	60.0	-3.6
6	19995.00	43.9 AV	54.0	-10.1	3.92 V	294	47.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.0 PK			2.09 H	240	98.0	7.0
2	*6825.00	92.3 AV			2.09 H	240	85.3	7.0
3	#13650.00	46.9 PK	88.2	-41.3	2.19 H	195	30.5	16.4
4	#13650.00	35.3 AV	68.2	-32.9	2.19 H	195	18.9	16.4
5	20475.00	54.4 PK	74.0	-19.6	1.49 H	320	57.6	-3.2
6	20475.00	38.1 AV	54.0	-15.9	1.49 H	320	41.3	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.5 PK			1.42 V	330	97.5	7.0
2	*6825.00	91.3 AV			1.42 V	330	84.3	7.0
3	#13650.00	47.3 PK	88.2	-40.9	2.31 V	146	30.9	16.4
4	#13650.00	35.6 AV	68.2	-32.6	2.31 V	146	19.2	16.4
5	20475.00	56.7 PK	74.0	-17.3	3.87 V	279	59.9	-3.2
6	20475.00	44.1 AV	54.0	-9.9	3.87 V	279	47.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.6 PK			1.08 H	220	97.7	7.9
2	*6985.00	95.7 AV			1.08 H	220	87.8	7.9
3	#7125.00	76.7 PK	88.2	-11.5	1.08 H	220	67.7	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.08 H	220	55.7	9.0
5	7250.00	63.8 PK	74.0	-10.2	1.08 H	220	54.5	9.3
6	7250.00	50.2 AV	54.0	-3.8	1.08 H	220	40.9	9.3
7	#13970.00	47.5 PK	88.2	-40.7	2.21 H	190	30.8	16.7
8	#13970.00	35.4 AV	68.2	-32.8	2.21 H	190	18.7	16.7
9	20955.00	55.0 PK	74.0	-19.0	1.55 H	308	57.7	-2.7
10	20955.00	38.9 AV	54.0	-15.1	1.55 H	308	41.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.2 PK			1.12 V	238	95.3	7.9
2	*6985.00	93.0 AV			1.12 V	238	85.1	7.9
3	#7125.00	72.3 PK	88.2	-15.9	1.12 V	238	63.3	9.0
4	#7125.00	62.6 AV	68.2	-5.6	1.12 V	238	53.6	9.0
5	7250.00	60.2 PK	74.0	-13.8	1.12 V	238	50.9	9.3
6	7250.00	48.8 AV	54.0	-5.2	1.12 V	238	39.5	9.3
7	#13970.00	47.5 PK	88.2	-40.7	2.39 V	152	30.8	16.7
8	#13970.00	35.8 AV	68.2	-32.4	2.39 V	152	19.1	16.7
9	20955.00	56.7 PK	74.0	-17.3	3.84 V	280	59.4	-2.7
10	20955.00	44.0 AV	54.0	-10.0	3.84 V	280	46.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Mode A

1Tx NSS1(RU, MRU)

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.1 PK	88.2	-20.1	1.37 H	222	63.7	4.4
2	#5925.00	50.2 AV	68.2	-18.0	1.37 H	222	45.8	4.4
3	*5955.00	118.8 PK			1.37 H	222	114.3	4.5
4	*5955.00	111.7 AV			1.37 H	222	107.2	4.5
5	11910.00	45.4 PK	74.0	-28.6	1.55 H	151	31.7	13.7
6	11910.00	33.2 AV	54.0	-20.8	1.55 H	151	19.5	13.7
7	17865.00	67.3 PK	74.0	-6.7	3.88 H	274	43.0	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.88 H	274	7.6	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	1.17 V	301	64.6	4.4
2	#5925.00	48.4 AV	68.2	-19.8	1.17 V	301	44.0	4.4
3	*5955.00	120.7 PK			1.17 V	301	116.2	4.5
4	*5955.00	105.9 AV			1.17 V	301	101.4	4.5
5	11910.00	49.7 PK	74.0	-24.3	2.56 V	6	36.0	13.7
6	11910.00	38.7 AV	54.0	-15.3	2.56 V	6	25.0	13.7
7	17865.00	42.4 PK	74.0	-31.6	3.10 V	53	18.1	24.3
8	17865.00	31.7 AV	54.0	-22.3	3.10 V	53	7.4	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.4 PK			1.12 H	220	114.6	4.8
2	*6195.00	110.8 AV			1.12 H	220	106.0	4.8
3	12390.00	45.8 PK	74.0	-28.2	1.51 H	157	31.9	13.9
4	12390.00	33.6 AV	54.0	-20.4	1.51 H	157	19.7	13.9
5	18585.00	67.3 PK	74.0	-6.7	3.91 H	258	72.3	-5.0
6	18585.00	32.0 AV	54.0	-22.0	3.91 H	258	37.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.8 PK			1.17 V	316	116.0	4.8
2	*6195.00	105.7 AV			1.17 V	316	100.9	4.8
3	12390.00	50.1 PK	74.0	-23.9	2.61 V	4	36.2	13.9
4	12390.00	38.9 AV	54.0	-15.1	2.61 V	4	25.0	13.9
5	18585.00	41.9 PK	74.0	-32.1	3.08 V	66	46.9	-5.0
6	18585.00	31.4 AV	54.0	-22.6	3.08 V	66	36.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.9 PK			1.18 H	223	113.7	6.2
2	*6415.00	111.2 AV			1.18 H	223	105.0	6.2
3	#12830.00	45.8 PK	88.2	-42.4	1.59 H	140	31.3	14.5
4	#12830.00	33.5 AV	68.2	-34.7	1.59 H	140	19.0	14.5
5	19245.00	67.4 PK	74.0	-6.6	3.89 H	275	71.2	-3.8
6	19245.00	31.8 AV	54.0	-22.2	3.89 H	275	35.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			1.19 V	316	114.6	6.2
2	*6415.00	106.2 AV			1.19 V	316	100.0	6.2
3	#12830.00	49.9 PK	88.2	-38.3	2.62 V	9	35.4	14.5
4	#12830.00	39.0 AV	68.2	-29.2	2.62 V	9	24.5	14.5
5	19245.00	41.8 PK	74.0	-32.2	3.07 V	64	45.6	-3.8
6	19245.00	31.4 AV	54.0	-22.6	3.07 V	64	35.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.7 PK			1.16 H	208	113.5	6.2
2	*6435.00	111.3 AV			1.16 H	208	105.1	6.2
3	#12870.00	45.2 PK	88.2	-43.0	1.59 H	136	30.5	14.7
4	#12870.00	33.2 AV	68.2	-35.0	1.59 H	136	18.5	14.7
5	19305.00	67.6 PK	74.0	-6.4	3.92 H	285	71.3	-3.7
6	19305.00	32.1 AV	54.0	-21.9	3.92 H	285	35.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	120.9 PK			1.14 V	315	114.7	6.2
2	*6435.00	105.8 AV			1.14 V	315	99.6	6.2
3	#12870.00	50.0 PK	88.2	-38.2	2.56 V	13	35.3	14.7
4	#12870.00	39.0 AV	68.2	-29.2	2.56 V	13	24.3	14.7
5	19305.00	42.9 PK	74.0	-31.1	3.15 V	52	46.6	-3.7
6	19305.00	32.0 AV	54.0	-22.0	3.15 V	52	35.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.2 PK			1.15 H	216	112.8	6.4
2	*6475.00	110.7 AV			1.15 H	216	104.3	6.4
3	#12950.00	45.5 PK	88.2	-42.7	1.50 H	149	30.8	14.7
4	#12950.00	33.3 AV	68.2	-34.9	1.50 H	149	18.6	14.7
5	19425.00	67.7 PK	74.0	-6.3	3.85 H	272	71.5	-3.8
6	19425.00	32.2 AV	54.0	-21.8	3.85 H	272	36.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.2 PK			1.23 V	301	113.8	6.4
2	*6475.00	105.7 AV			1.23 V	301	99.3	6.4
3	#12950.00	49.8 PK	88.2	-38.4	2.62 V	5	35.1	14.7
4	#12950.00	38.7 AV	68.2	-29.5	2.62 V	5	24.0	14.7
5	19425.00	42.8 PK	74.0	-31.2	3.04 V	65	46.6	-3.8
6	19425.00	32.1 AV	54.0	-21.9	3.04 V	65	35.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	119.3 PK			1.15 H	213	112.6	6.7
2	*6515.00	110.6 AV			1.15 H	213	103.9	6.7
3	#13030.00	46.0 PK	88.2	-42.2	1.52 H	149	31.4	14.6
4	#13030.00	33.7 AV	68.2	-34.5	1.52 H	149	19.1	14.6
5	19545.00	67.8 PK	74.0	-6.2	3.89 H	278	71.9	-4.1
6	19545.00	32.4 AV	54.0	-21.6	3.89 H	278	36.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.9 PK			1.15 V	311	114.2	6.7
2	*6515.00	106.4 AV			1.15 V	311	99.7	6.7
3	#13030.00	50.0 PK	88.2	-38.2	2.60 V	8	35.4	14.6
4	#13030.00	38.8 AV	68.2	-29.4	2.60 V	8	24.2	14.6
5	19545.00	42.1 PK	74.0	-31.9	3.07 V	46	46.2	-4.1
6	19545.00	31.3 AV	54.0	-22.7	3.07 V	46	35.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.7 PK			1.12 H	218	112.9	6.8
2	*6535.00	110.9 AV			1.12 H	218	104.1	6.8
3	#13070.00	46.1 PK	88.2	-42.1	1.57 H	147	31.4	14.7
4	#13070.00	33.6 AV	68.2	-34.6	1.57 H	147	18.9	14.7
5	19605.00	67.3 PK	74.0	-6.7	3.87 H	269	71.3	-4.0
6	19605.00	31.7 AV	54.0	-22.3	3.87 H	269	35.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.2 PK			1.23 V	291	114.4	6.8
2	*6535.00	106.3 AV			1.23 V	291	99.5	6.8
3	#13070.00	49.0 PK	88.2	-39.2	2.53 V	0	34.3	14.7
4	#13070.00	38.2 AV	68.2	-30.0	2.53 V	0	23.5	14.7
5	19605.00	42.1 PK	74.0	-31.9	3.15 V	47	46.1	-4.0
6	19605.00	31.6 AV	54.0	-22.4	3.15 V	47	35.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.7 PK			1.15 H	224	112.7	7.0
2	*6695.00	111.1 AV			1.15 H	224	104.1	7.0
3	13390.00	45.5 PK	74.0	-28.5	1.57 H	154	30.2	15.3
4	13390.00	33.3 AV	54.0	-20.7	1.57 H	154	18.0	15.3
5	20085.00	66.9 PK	74.0	-7.1	3.87 H	275	70.4	-3.5
6	20085.00	31.7 AV	54.0	-22.3	3.87 H	275	35.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.15 V	303	114.1	7.0
2	*6695.00	106.4 AV			1.15 V	303	99.4	7.0
3	13390.00	50.3 PK	74.0	-23.7	2.54 V	18	35.0	15.3
4	13390.00	39.1 AV	54.0	-14.9	2.54 V	18	23.8	15.3
5	20085.00	42.1 PK	74.0	-31.9	3.08 V	54	45.6	-3.5
6	20085.00	31.3 AV	54.0	-22.7	3.08 V	54	34.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.9 PK			1.07 H	216	111.9	7.0
2	*6855.00	110.5 AV			1.07 H	216	103.5	7.0
3	#13710.00	45.7 PK	88.2	-42.5	1.58 H	138	29.4	16.3
4	#13710.00	33.3 AV	68.2	-34.9	1.58 H	138	17.0	16.3
5	20565.00	67.7 PK	74.0	-6.3	3.93 H	267	71.0	-3.3
6	20565.00	32.4 AV	54.0	-21.6	3.93 H	267	35.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.5 PK			1.22 V	296	113.5	7.0
2	*6855.00	105.7 AV			1.22 V	296	98.7	7.0
3	#13710.00	49.9 PK	88.2	-38.3	2.55 V	0	33.6	16.3
4	#13710.00	39.1 AV	68.2	-29.1	2.55 V	0	22.8	16.3
5	20565.00	42.7 PK	74.0	-31.3	3.10 V	43	46.0	-3.3
6	20565.00	32.0 AV	54.0	-22.0	3.10 V	43	35.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.0 PK			1.08 H	228	112.9	7.1
2	*6875.00	111.2 AV			1.08 H	228	104.1	7.1
3	#13750.00	45.3 PK	88.2	-42.9	1.52 H	152	29.2	16.1
4	#13750.00	32.8 AV	68.2	-35.4	1.52 H	152	16.7	16.1
5	20625.00	67.5 PK	74.0	-6.5	3.87 H	268	70.8	-3.3
6	20625.00	32.3 AV	54.0	-21.7	3.87 H	268	35.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.7 PK			1.19 V	313	113.6	7.1
2	*6875.00	105.8 AV			1.19 V	313	98.7	7.1
3	#13750.00	49.7 PK	88.2	-38.5	2.59 V	5	33.6	16.1
4	#13750.00	39.0 AV	68.2	-29.2	2.59 V	5	22.9	16.1
5	20625.00	42.7 PK	74.0	-31.3	3.09 V	48	46.0	-3.3
6	20625.00	31.9 AV	54.0	-22.1	3.09 V	48	35.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	119.7 PK			1.09 H	218	111.8	7.9
2	*6995.00	110.9 AV			1.09 H	218	103.0	7.9
3	#13990.00	45.0 PK	88.2	-43.2	1.55 H	148	28.3	16.7
4	#13990.00	33.0 AV	68.2	-35.2	1.55 H	148	16.3	16.7
5	20985.00	67.6 PK	74.0	-6.4	3.94 H	272	70.4	-2.8
6	20985.00	31.9 AV	54.0	-22.1	3.94 H	272	34.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.9 PK			1.15 V	290	113.0	7.9
2	*6995.00	106.3 AV			1.15 V	290	98.4	7.9
3	#13990.00	49.3 PK	88.2	-38.9	2.57 V	4	32.6	16.7
4	#13990.00	38.5 AV	68.2	-29.7	2.57 V	4	21.8	16.7
5	20985.00	42.4 PK	74.0	-31.6	3.12 V	52	45.2	-2.8
6	20985.00	31.8 AV	54.0	-22.2	3.12 V	52	34.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			1.00 H	210	93.0	9.0
2	*7115.00	91.7 AV			1.00 H	210	82.7	9.0
3	#7125.00	86.2 PK	88.2	-2.0	1.00 H	210	77.2	9.0
4	#7125.00	60.8 AV	68.2	-7.4	1.00 H	210	51.8	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.00 H	210	46.1	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.00 H	210	34.5	9.3
7	#14230.00	49.4 PK	88.2	-38.8	2.62 H	0	32.5	16.9
8	#14230.00	38.5 AV	68.2	-29.7	2.62 H	0	21.6	16.9
9	21345.00	42.1 PK	74.0	-31.9	3.07 H	51	43.7	-1.6
10	21345.00	31.4 AV	54.0	-22.6	3.07 H	51	33.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.3 PK			1.15 V	271	91.3	9.0
2	*7115.00	92.5 AV			1.15 V	271	83.5	9.0
3	#7125.00	86.4 PK	88.2	-1.8	1.15 V	271	77.4	9.0
4	#7125.00	60.6 AV	68.2	-7.6	1.15 V	271	51.6	9.0
5	7250.00	56.2 PK	74.0	-17.8	1.15 V	271	46.9	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.15 V	271	34.4	9.3
7	#14230.00	50.1 PK	88.2	-38.1	2.53 V	13	33.2	16.9
8	#14230.00	38.8 AV	68.2	-29.4	2.53 V	13	21.9	16.9
9	21345.00	43.1 PK	74.0	-30.9	3.04 V	58	44.7	-1.6
10	21345.00	32.1 AV	54.0	-21.9	3.04 V	58	33.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	2.22 H	223	65.9	4.4
2	#5925.00	50.4 AV	68.2	-17.8	2.22 H	223	46.0	4.4
3	*5955.00	119.1 PK			2.22 H	223	114.6	4.5
4	*5955.00	109.1 AV			2.22 H	223	104.6	4.5
5	11910.00	50.0 PK	74.0	-24.0	2.51 H	0	36.3	13.7
6	11910.00	37.7 AV	54.0	-16.3	2.51 H	0	24.0	13.7
7	17865.00	67.5 PK	74.0	-6.5	3.86 H	276	43.2	24.3
8	17865.00	31.8 AV	54.0	-22.2	3.86 H	276	7.5	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	1.70 V	8	67.8	4.4
2	#5925.00	50.9 AV	68.2	-17.3	1.70 V	8	46.5	4.4
3	*5955.00	120.0 PK			1.70 V	8	115.5	4.5
4	*5955.00	110.0 AV			1.70 V	8	105.5	4.5
5	11910.00	50.2 PK	74.0	-23.8	2.48 V	0	36.5	13.7
6	11910.00	38.1 AV	54.0	-15.9	2.48 V	0	24.4	13.7
7	17865.00	42.9 PK	74.0	-31.1	3.17 V	82	18.6	24.3
8	17865.00	32.1 AV	54.0	-21.9	3.17 V	82	7.8	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.2 PK			1.07 H	220	114.4	4.8
2	*6195.00	108.3 AV			1.07 H	220	103.5	4.8
3	12390.00	49.5 PK	74.0	-24.5	2.52 H	4	35.6	13.9
4	12390.00	38.8 AV	54.0	-15.2	2.52 H	4	24.9	13.9
5	18585.00	42.0 PK	74.0	-32.0	3.07 H	51	47.0	-5.0
6	18585.00	31.5 AV	54.0	-22.5	3.07 H	51	36.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.6 PK			1.72 V	1	114.8	4.8
2	*6195.00	109.7 AV			1.72 V	1	104.9	4.8
3	12390.00	50.7 PK	74.0	-23.3	2.45 V	2	36.8	13.9
4	12390.00	38.3 AV	54.0	-15.7	2.45 V	2	24.4	13.9
5	18585.00	42.3 PK	74.0	-31.7	3.21 V	86	47.3	-5.0
6	18585.00	31.8 AV	54.0	-22.2	3.21 V	86	36.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			1.08 H	229	112.2	6.2
2	*6415.00	107.8 AV			1.08 H	229	101.6	6.2
3	#12830.00	49.3 PK	88.2	-38.9	2.56 H	0	34.8	14.5
4	#12830.00	38.3 AV	68.2	-29.9	2.56 H	0	23.8	14.5
5	19245.00	42.8 PK	74.0	-31.2	3.06 H	59	46.6	-3.8
6	19245.00	32.0 AV	54.0	-22.0	3.06 H	59	35.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.5 PK			1.68 V	0	113.3	6.2
2	*6415.00	109.6 AV			1.68 V	0	103.4	6.2
3	#12830.00	50.2 PK	88.2	-38.0	2.51 V	0	35.7	14.5
4	#12830.00	38.2 AV	68.2	-30.0	2.51 V	0	23.7	14.5
5	19245.00	43.1 PK	74.0	-30.9	3.16 V	95	46.9	-3.8
6	19245.00	32.5 AV	54.0	-21.5	3.16 V	95	36.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	118.9 PK			1.05 H	227	112.7	6.2
2	*6435.00	107.9 AV			1.05 H	227	101.7	6.2
3	#12870.00	49.4 PK	88.2	-38.8	2.55 H	22	34.7	14.7
4	#12870.00	38.5 AV	68.2	-29.7	2.55 H	22	23.8	14.7
5	19305.00	41.8 PK	74.0	-32.2	3.13 H	57	45.5	-3.7
6	19305.00	31.2 AV	54.0	-22.8	3.13 H	57	34.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.7 PK			1.67 V	7	113.5	6.2
2	*6435.00	109.6 AV			1.67 V	7	103.4	6.2
3	#12870.00	50.3 PK	88.2	-37.9	2.52 V	0	35.6	14.7
4	#12870.00	38.4 AV	68.2	-29.8	2.52 V	0	23.7	14.7
5	19305.00	42.5 PK	74.0	-31.5	3.22 V	73	46.2	-3.7
6	19305.00	31.8 AV	54.0	-22.2	3.22 V	73	35.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.4 PK			1.09 H	205	113.0	6.4
2	*6475.00	108.7 AV			1.09 H	205	102.3	6.4
3	#12950.00	50.2 PK	88.2	-38.0	2.53 H	0	35.5	14.7
4	#12950.00	39.2 AV	68.2	-29.0	2.53 H	0	24.5	14.7
5	19425.00	42.4 PK	74.0	-31.6	3.10 H	62	46.2	-3.8
6	19425.00	31.8 AV	54.0	-22.2	3.10 H	62	35.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.6 PK			1.72 V	0	114.2	6.4
2	*6475.00	110.4 AV			1.72 V	0	104.0	6.4
3	#12950.00	49.9 PK	88.2	-38.3	2.50 V	0	35.2	14.7
4	#12950.00	38.0 AV	68.2	-30.2	2.50 V	0	23.3	14.7
5	19425.00	42.9 PK	74.0	-31.1	3.17 V	93	46.7	-3.8
6	19425.00	31.9 AV	54.0	-22.1	3.17 V	93	35.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	119.3 PK			1.08 H	229	112.6	6.7
2	*6515.00	108.6 AV			1.08 H	229	101.9	6.7
3	#13030.00	49.6 PK	88.2	-38.6	2.58 H	11	35.0	14.6
4	#13030.00	38.7 AV	68.2	-29.5	2.58 H	11	24.1	14.6
5	19545.00	41.9 PK	74.0	-32.1	3.10 H	58	46.0	-4.1
6	19545.00	31.2 AV	54.0	-22.8	3.10 H	58	35.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	119.7 PK			1.75 V	15	113.0	6.7
2	*6515.00	109.6 AV			1.75 V	15	102.9	6.7
3	#13030.00	50.2 PK	88.2	-38.0	2.47 V	0	35.6	14.6
4	#13030.00	38.1 AV	68.2	-30.1	2.47 V	0	23.5	14.6
5	19545.00	42.4 PK	74.0	-31.6	3.16 V	72	46.5	-4.1
6	19545.00	31.9 AV	54.0	-22.1	3.16 V	72	36.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.9 PK			1.05 H	231	112.1	6.8
2	*6535.00	108.2 AV			1.05 H	231	101.4	6.8
3	#13070.00	49.4 PK	88.2	-38.8	2.51 H	16	34.7	14.7
4	#13070.00	38.5 AV	68.2	-29.7	2.51 H	16	23.8	14.7
5	19605.00	42.8 PK	74.0	-31.2	3.05 H	68	46.8	-4.0
6	19605.00	32.0 AV	54.0	-22.0	3.05 H	68	36.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.8 PK			1.69 V	21	113.0	6.8
2	*6535.00	109.7 AV			1.69 V	21	102.9	6.8
3	#13070.00	50.1 PK	88.2	-38.1	2.52 V	7	35.4	14.7
4	#13070.00	37.9 AV	68.2	-30.3	2.52 V	7	23.2	14.7
5	19605.00	42.6 PK	74.0	-31.4	3.13 V	71	46.6	-4.0
6	19605.00	32.0 AV	54.0	-22.0	3.13 V	71	36.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			1.11 H	214	111.9	7.0
2	*6695.00	107.8 AV			1.11 H	214	100.8	7.0
3	13390.00	48.9 PK	74.0	-25.1	2.57 H	20	33.6	15.3
4	13390.00	38.2 AV	54.0	-15.8	2.57 H	20	22.9	15.3
5	20085.00	42.8 PK	74.0	-31.2	3.05 H	40	46.3	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.05 H	40	35.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			1.72 V	10	112.8	7.0
2	*6695.00	109.8 AV			1.72 V	10	102.8	7.0
3	13390.00	50.1 PK	74.0	-23.9	2.49 V	0	34.8	15.3
4	13390.00	38.1 AV	54.0	-15.9	2.49 V	0	22.8	15.3
5	20085.00	43.4 PK	74.0	-30.6	3.17 V	90	46.9	-3.5
6	20085.00	32.4 AV	54.0	-21.6	3.17 V	90	35.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.0 PK			1.03 H	211	112.0	7.0
2	*6855.00	107.9 AV			1.03 H	211	100.9	7.0
3	#13710.00	49.1 PK	88.2	-39.1	2.57 H	15	32.8	16.3
4	#13710.00	38.3 AV	68.2	-29.9	2.57 H	15	22.0	16.3
5	20565.00	42.3 PK	74.0	-31.7	3.15 H	50	45.6	-3.3
6	20565.00	31.7 AV	54.0	-22.3	3.15 H	50	35.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.1 PK			1.67 V	12	113.1	7.0
2	*6855.00	110.0 AV			1.67 V	12	103.0	7.0
3	#13710.00	49.6 PK	88.2	-38.6	2.48 V	0	33.3	16.3
4	#13710.00	37.6 AV	68.2	-30.6	2.48 V	0	21.3	16.3
5	20565.00	42.5 PK	74.0	-31.5	3.14 V	72	45.8	-3.3
6	20565.00	31.8 AV	54.0	-22.2	3.14 V	72	35.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.3 PK			1.12 H	226	112.2	7.1
2	*6875.00	108.3 AV			1.12 H	226	101.2	7.1
3	#13750.00	49.0 PK	88.2	-39.2	2.56 H	19	32.9	16.1
4	#13750.00	38.2 AV	68.2	-30.0	2.56 H	19	22.1	16.1
5	20625.00	42.1 PK	74.0	-31.9	3.14 H	60	45.4	-3.3
6	20625.00	31.7 AV	54.0	-22.3	3.14 H	60	35.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.6 PK			1.76 V	17	112.5	7.1
2	*6875.00	109.7 AV			1.76 V	17	102.6	7.1
3	#13750.00	50.7 PK	88.2	-37.5	2.46 V	0	34.6	16.1
4	#13750.00	38.6 AV	68.2	-29.6	2.46 V	0	22.5	16.1
5	20625.00	43.1 PK	74.0	-30.9	3.21 V	68	46.4	-3.3
6	20625.00	32.4 AV	54.0	-21.6	3.21 V	68	35.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.9 PK			1.13 H	206	111.0	7.9
2	*6995.00	108.2 AV			1.13 H	206	100.3	7.9
3	#13990.00	49.5 PK	88.2	-38.7	2.55 H	0	32.8	16.7
4	#13990.00	38.6 AV	68.2	-29.6	2.55 H	0	21.9	16.7
5	20985.00	42.6 PK	74.0	-31.4	3.08 H	51	45.4	-2.8
6	20985.00	31.7 AV	54.0	-22.3	3.08 H	51	34.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.4 PK			1.76 V	0	112.5	7.9
2	*6995.00	110.2 AV			1.76 V	0	102.3	7.9
3	#13990.00	50.5 PK	88.2	-37.7	2.53 V	0	33.8	16.7
4	#13990.00	38.3 AV	68.2	-29.9	2.53 V	0	21.6	16.7
5	20985.00	42.4 PK	74.0	-31.6	3.23 V	93	45.2	-2.8
6	20985.00	31.6 AV	54.0	-22.4	3.23 V	93	34.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.9 PK			2.02 H	225	89.9	9.0
2	*7115.00	91.2 AV			2.02 H	225	82.2	9.0
3	#7125.00	85.1 PK	88.2	-3.1	2.02 H	225	76.1	9.0
4	#7125.00	59.9 AV	68.2	-8.3	2.02 H	225	50.9	9.0
5	7250.00	54.7 PK	74.0	-19.3	2.02 H	225	45.4	9.3
6	7250.00	43.7 AV	54.0	-10.3	2.02 H	225	34.4	9.3
7	#14230.00	50.1 PK	88.2	-38.1	2.56 H	2	33.2	16.9
8	#14230.00	39.0 AV	68.2	-29.2	2.56 H	2	22.1	16.9
9	21345.00	42.4 PK	74.0	-31.6	3.11 H	64	44.0	-1.6
10	21345.00	31.8 AV	54.0	-22.2	3.11 H	64	33.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.4 PK			1.15 V	271	93.4	9.0
2	*7115.00	92.5 AV			1.15 V	271	83.5	9.0
3	#7125.00	86.4 PK	88.2	-1.8	1.15 V	271	77.4	9.0
4	#7125.00	60.6 AV	68.2	-7.6	1.15 V	271	51.6	9.0
5	7250.00	56.2 PK	74.0	-17.8	1.15 V	271	46.9	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.15 V	271	34.4	9.3
7	#14230.00	49.9 PK	88.2	-38.3	2.43 V	0	33.0	16.9
8	#14230.00	37.8 AV	68.2	-30.4	2.43 V	0	20.9	16.9
9	21345.00	42.9 PK	74.0	-31.1	3.16 V	79	44.5	-1.6
10	21345.00	31.8 AV	54.0	-22.2	3.16 V	79	33.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	1.62 H	13	62.5	4.4
2	#5925.00	45.0 AV	68.2	-23.2	1.62 H	13	40.6	4.4
3	*5955.00	113.0 PK			1.62 H	13	108.5	4.5
4	*5955.00	102.6 AV			1.62 H	13	98.1	4.5
5	11910.00	49.8 PK	74.0	-24.2	2.56 H	9	36.1	13.7
6	11910.00	38.9 AV	54.0	-15.1	2.56 H	9	25.2	13.7
7	17865.00	42.3 PK	74.0	-31.7	3.05 H	49	18.0	24.3
8	17865.00	31.6 AV	54.0	-22.4	3.05 H	49	7.3	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.9 PK	88.2	-19.3	1.16 V	305	64.5	4.4
2	#5925.00	49.8 AV	68.2	-18.4	1.16 V	305	45.4	4.4
3	*5955.00	117.0 PK			1.16 V	305	112.5	4.5
4	*5955.00	107.0 AV			1.16 V	305	102.5	4.5
5	11910.00	49.9 PK	74.0	-24.1	2.43 V	0	36.2	13.7
6	11910.00	37.9 AV	54.0	-16.1	2.43 V	0	24.2	13.7
7	17865.00	43.3 PK	74.0	-30.7	3.15 V	90	19.0	24.3
8	17865.00	32.1 AV	54.0	-21.9	3.15 V	90	7.8	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.23 H	219	111.1	4.8
2	*6195.00	104.4 AV			2.23 H	219	99.6	4.8
3	12390.00	50.1 PK	74.0	-23.9	2.59 H	0	36.2	13.9
4	12390.00	39.0 AV	54.0	-15.0	2.59 H	0	25.1	13.9
5	18585.00	42.2 PK	74.0	-31.8	3.15 H	41	47.2	-5.0
6	18585.00	31.4 AV	54.0	-22.6	3.15 H	41	36.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.9 PK			1.12 V	220	113.1	4.8
2	*6195.00	105.5 AV			1.12 V	220	100.7	4.8
3	12390.00	49.9 PK	74.0	-24.1	2.44 V	0	36.0	13.9
4	12390.00	37.6 AV	54.0	-16.4	2.44 V	0	23.7	13.9
5	18585.00	42.6 PK	74.0	-31.4	3.18 V	94	47.6	-5.0
6	18585.00	31.3 AV	54.0	-22.7	3.18 V	94	36.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.9 PK			2.25 H	231	109.7	6.2
2	*6415.00	104.5 AV			2.25 H	231	98.3	6.2
3	#12830.00	49.8 PK	88.2	-38.4	2.53 H	9	35.3	14.5
4	#12830.00	38.7 AV	68.2	-29.5	2.53 H	9	24.2	14.5
5	19245.00	42.0 PK	74.0	-32.0	3.09 H	51	45.8	-3.8
6	19245.00	31.2 AV	54.0	-22.8	3.09 H	51	35.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.8 PK			1.16 V	211	111.6	6.2
2	*6415.00	105.6 AV			1.16 V	211	99.4	6.2
3	#12830.00	49.6 PK	88.2	-38.6	2.39 V	0	35.1	14.5
4	#12830.00	37.5 AV	68.2	-30.7	2.39 V	0	23.0	14.5
5	19245.00	42.9 PK	74.0	-31.1	3.14 V	71	46.7	-3.8
6	19245.00	31.6 AV	54.0	-22.4	3.14 V	71	35.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.5 PK			2.19 H	207	109.3	6.2
2	*6435.00	104.2 AV			2.19 H	207	98.0	6.2
3	#12870.00	49.5 PK	88.2	-38.7	2.54 H	21	34.8	14.7
4	#12870.00	38.3 AV	68.2	-29.9	2.54 H	21	23.6	14.7
5	19305.00	42.1 PK	74.0	-31.9	3.05 H	59	45.8	-3.7
6	19305.00	31.5 AV	54.0	-22.5	3.05 H	59	35.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	118.3 PK			1.16 V	227	112.1	6.2
2	*6435.00	105.9 AV			1.16 V	227	99.7	6.2
3	#12870.00	50.3 PK	88.2	-37.9	2.40 V	0	35.6	14.7
4	#12870.00	38.2 AV	68.2	-30.0	2.40 V	0	23.5	14.7
5	19305.00	42.9 PK	74.0	-31.1	3.19 V	80	46.6	-3.7
6	19305.00	31.9 AV	54.0	-22.1	3.19 V	80	35.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.6 PK			2.19 H	218	109.2	6.4
2	*6475.00	104.4 AV			2.19 H	218	98.0	6.4
3	#12950.00	50.0 PK	88.2	-38.2	2.60 H	1	35.3	14.7
4	#12950.00	38.8 AV	68.2	-29.4	2.60 H	1	24.1	14.7
5	19425.00	42.4 PK	74.0	-31.6	3.06 H	45	46.2	-3.8
6	19425.00	31.6 AV	54.0	-22.4	3.06 H	45	35.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.1 PK			1.14 V	227	111.7	6.4
2	*6475.00	105.4 AV			1.14 V	227	99.0	6.4
3	#12950.00	50.0 PK	88.2	-38.2	2.38 V	0	35.3	14.7
4	#12950.00	37.7 AV	68.2	-30.5	2.38 V	0	23.0	14.7
5	19425.00	42.7 PK	74.0	-31.3	3.21 V	81	46.5	-3.8
6	19425.00	31.4 AV	54.0	-22.6	3.21 V	81	35.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.7 PK			2.22 H	232	109.0	6.7
2	*6515.00	104.3 AV			2.22 H	232	97.6	6.7
3	#13030.00	50.2 PK	88.2	-38.0	2.59 H	10	35.6	14.6
4	#13030.00	39.1 AV	68.2	-29.1	2.59 H	10	24.5	14.6
5	19545.00	42.5 PK	74.0	-31.5	3.10 H	44	46.6	-4.1
6	19545.00	31.7 AV	54.0	-22.3	3.10 H	44	35.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.9 PK			1.17 V	206	111.2	6.7
2	*6515.00	105.7 AV			1.17 V	206	99.0	6.7
3	#13030.00	49.9 PK	88.2	-38.3	2.47 V	0	35.3	14.6
4	#13030.00	37.6 AV	68.2	-30.6	2.47 V	0	23.0	14.6
5	19545.00	42.9 PK	74.0	-31.1	3.14 V	64	47.0	-4.1
6	19545.00	31.6 AV	54.0	-22.4	3.14 V	64	35.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.3 PK			2.20 H	214	108.5	6.8
2	*6535.00	103.9 AV			2.20 H	214	97.1	6.8
3	#13070.00	49.5 PK	88.2	-38.7	2.61 H	0	34.8	14.7
4	#13070.00	38.6 AV	68.2	-29.6	2.61 H	0	23.9	14.7
5	19605.00	41.8 PK	74.0	-32.2	3.08 H	42	45.8	-4.0
6	19605.00	31.2 AV	54.0	-22.8	3.08 H	42	35.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.2 PK			1.13 V	205	111.4	6.8
2	*6535.00	105.7 AV			1.13 V	205	98.9	6.8
3	#13070.00	49.3 PK	88.2	-38.9	2.41 V	0	34.6	14.7
4	#13070.00	37.4 AV	68.2	-30.8	2.41 V	0	22.7	14.7
5	19605.00	42.7 PK	74.0	-31.3	3.19 V	75	46.7	-4.0
6	19605.00	31.5 AV	54.0	-22.5	3.19 V	75	35.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.3 PK			2.26 H	229	108.3	7.0
2	*6695.00	103.9 AV			2.26 H	229	96.9	7.0
3	13390.00	49.9 PK	74.0	-24.1	2.52 H	15	34.6	15.3
4	13390.00	38.8 AV	54.0	-15.2	2.52 H	15	23.5	15.3
5	20085.00	43.1 PK	74.0	-30.9	3.04 H	43	46.6	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.04 H	43	35.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.7 PK			1.14 V	205	110.7	7.0
2	*6695.00	105.1 AV			1.14 V	205	98.1	7.0
3	13390.00	50.4 PK	74.0	-23.6	2.39 V	0	35.1	15.3
4	13390.00	38.1 AV	54.0	-15.9	2.39 V	0	22.8	15.3
5	20085.00	42.8 PK	74.0	-31.2	3.21 V	80	46.3	-3.5
6	20085.00	31.9 AV	54.0	-22.1	3.21 V	80	35.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.9 PK			2.23 H	207	108.9	7.0
2	*6855.00	104.2 AV			2.23 H	207	97.2	7.0
3	#13710.00	50.2 PK	88.2	-38.0	2.58 H	8	33.9	16.3
4	#13710.00	39.1 AV	68.2	-29.1	2.58 H	8	22.8	16.3
5	20565.00	42.5 PK	74.0	-31.5	3.05 H	60	45.8	-3.3
6	20565.00	31.8 AV	54.0	-22.2	3.05 H	60	35.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			1.13 V	229	111.4	7.0
2	*6855.00	106.0 AV			1.13 V	229	99.0	7.0
3	#13710.00	49.9 PK	88.2	-38.3	2.39 V	0	33.6	16.3
4	#13710.00	38.0 AV	68.2	-30.2	2.39 V	0	21.7	16.3
5	20565.00	42.5 PK	74.0	-31.5	3.15 V	78	45.8	-3.3
6	20565.00	31.6 AV	54.0	-22.4	3.15 V	78	34.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.8 PK			2.26 H	233	108.7	7.1
2	*6875.00	104.5 AV			2.26 H	233	97.4	7.1
3	#13750.00	49.8 PK	88.2	-38.4	2.45 H	0	33.7	16.1
4	#13750.00	37.7 AV	68.2	-30.5	2.45 H	0	21.6	16.1
5	20625.00	43.4 PK	74.0	-30.6	3.11 H	66	46.7	-3.3
6	20625.00	32.0 AV	54.0	-22.0	3.11 H	66	35.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.3 PK			1.13 V	219	111.2	7.1
2	*6875.00	105.7 AV			1.13 V	219	98.6	7.1
3	#13750.00	50.2 PK	88.2	-38.0	2.38 V	0	34.1	16.1
4	#13750.00	38.3 AV	68.2	-29.9	2.38 V	0	22.2	16.1
5	20625.00	42.7 PK	74.0	-31.3	3.19 V	94	46.0	-3.3
6	20625.00	31.5 AV	54.0	-22.5	3.19 V	94	34.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.2 PK			2.27 H	231	108.3	7.9
2	*6995.00	104.5 AV			2.27 H	231	96.6	7.9
3	#13990.00	49.3 PK	88.2	-38.9	2.46 H	0	32.6	16.7
4	#13990.00	37.4 AV	68.2	-30.8	2.46 H	0	20.7	16.7
5	20985.00	43.3 PK	74.0	-30.7	3.12 H	85	46.1	-2.8
6	20985.00	32.1 AV	54.0	-21.9	3.12 H	85	34.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.6 PK			1.17 V	234	110.7	7.9
2	*6995.00	105.9 AV			1.17 V	234	98.0	7.9
3	#13990.00	50.2 PK	88.2	-38.0	2.39 V	0	33.5	16.7
4	#13990.00	38.2 AV	68.2	-30.0	2.39 V	0	21.5	16.7
5	20985.00	42.7 PK	74.0	-31.3	3.21 V	88	45.5	-2.8
6	20985.00	31.5 AV	54.0	-22.5	3.21 V	88	34.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			2.11 H	230	93.0	9.0
2	*7115.00	92.2 AV			2.11 H	230	83.2	9.0
3	#7125.00	86.6 PK	88.2	-1.6	2.11 H	230	77.6	9.0
4	#7125.00	59.5 AV	68.2	-8.7	2.11 H	230	50.5	9.0
5	7250.00	55.1 PK	74.0	-18.9	2.11 H	230	45.8	9.3
6	7250.00	43.7 AV	54.0	-10.3	2.11 H	230	34.4	9.3
7	#14230.00	50.3 PK	88.2	-37.9	2.38 H	0	33.4	16.9
8	#14230.00	38.0 AV	68.2	-30.2	2.38 H	0	21.1	16.9
9	21345.00	43.3 PK	74.0	-30.7	3.15 H	85	44.9	-1.6
10	21345.00	32.2 AV	54.0	-21.8	3.15 H	85	33.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.05 V	275	92.3	9.0
2	*7115.00	92.4 AV			1.05 V	275	83.4	9.0
3	#7125.00	86.5 PK	88.2	-1.7	1.05 V	275	77.5	9.0
4	#7125.00	57.8 AV	68.2	-10.4	1.05 V	275	48.8	9.0
5	7250.00	55.7 PK	74.0	-18.3	1.05 V	275	46.4	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.05 V	275	34.5	9.3
7	#14230.00	50.2 PK	88.2	-38.0	2.43 V	0	33.3	16.9
8	#14230.00	38.2 AV	68.2	-30.0	2.43 V	0	21.3	16.9
9	21345.00	43.2 PK	74.0	-30.8	3.14 V	65	44.8	-1.6
10	21345.00	32.1 AV	54.0	-21.9	3.14 V	65	33.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.3 PK	88.2	-23.9	2.20 H	13	59.9	4.4
2	#5925.00	42.9 AV	68.2	-25.3	2.20 H	13	38.5	4.4
3	*5955.00	115.3 PK			2.20 H	13	110.8	4.5
4	*5955.00	103.7 AV			2.20 H	13	99.2	4.5
5	11910.00	50.1 PK	74.0	-23.9	2.42 H	0	36.4	13.7
6	11910.00	38.1 AV	54.0	-15.9	2.42 H	0	24.4	13.7
7	17865.00	43.5 PK	74.0	-30.5	3.17 H	81	19.2	24.3
8	17865.00	32.2 AV	54.0	-21.8	3.17 H	81	7.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.00 V	242	69.5	4.4
2	#5925.00	45.9 AV	68.2	-22.3	2.00 V	242	41.5	4.4
3	*5955.00	118.9 PK			2.00 V	242	114.4	4.5
4	*5955.00	107.7 AV			2.00 V	242	103.2	4.5
5	11910.00	49.7 PK	74.0	-24.3	2.40 V	0	36.0	13.7
6	11910.00	37.5 AV	54.0	-16.5	2.40 V	0	23.8	13.7
7	17865.00	42.5 PK	74.0	-31.5	3.11 V	66	18.2	24.3
8	17865.00	31.5 AV	54.0	-22.5	3.11 V	66	7.2	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.2 PK			1.54 H	209	111.8	6.4
2	*6475.00	106.0 AV			1.54 H	209	99.6	6.4
3	#12950.00	49.6 PK	88.2	-38.6	2.48 H	0	34.9	14.7
4	#12950.00	37.5 AV	68.2	-30.7	2.48 H	0	22.8	14.7
5	19425.00	42.8 PK	74.0	-31.2	3.17 H	82	46.6	-3.8
6	19425.00	31.8 AV	54.0	-22.2	3.17 H	82	35.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.3 PK			1.09 V	262	113.9	6.4
2	*6475.00	108.5 AV			1.09 V	262	102.1	6.4
3	#12950.00	49.6 PK	88.2	-38.6	2.44 V	0	34.9	14.7
4	#12950.00	37.8 AV	68.2	-30.4	2.44 V	0	23.1	14.7
5	19425.00	42.6 PK	74.0	-31.4	3.15 V	79	46.4	-3.8
6	19425.00	31.4 AV	54.0	-22.6	3.15 V	79	35.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.2 PK			1.51 H	228	111.2	7.0
2	*6695.00	106.2 AV			1.51 H	228	99.2	7.0
3	13390.00	50.0 PK	74.0	-24.0	2.56 H	7	34.7	15.3
4	13390.00	38.7 AV	54.0	-15.3	2.56 H	7	23.4	15.3
5	20085.00	42.5 PK	74.0	-31.5	3.13 H	68	46.0	-3.5
6	20085.00	31.8 AV	54.0	-22.2	3.13 H	68	35.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.10 V	273	114.1	7.0
2	*6695.00	108.8 AV			1.10 V	273	101.8	7.0
3	13390.00	50.1 PK	74.0	-23.9	2.58 V	0	34.8	15.3
4	13390.00	38.8 AV	54.0	-15.2	2.58 V	0	23.5	15.3
5	20085.00	43.1 PK	74.0	-30.9	3.15 V	58	46.6	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.15 V	58	35.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.8 PK			2.10 H	230	105.8	9.0
2	*7115.00	105.4 AV			2.10 H	230	96.4	9.0
3	#7125.00	86.5 PK	88.2	-1.7	2.10 H	230	77.5	9.0
4	#7125.00	66.6 AV	68.2	-1.6	2.10 H	230	57.6	9.0
5	7250.00	55.6 PK	74.0	-18.4	2.10 H	230	46.3	9.3
6	7250.00	44.0 AV	54.0	-10.0	2.10 H	230	34.7	9.3
7	#14230.00	49.8 PK	88.2	-38.4	2.53 H	10	32.9	16.9
8	#14230.00	39.0 AV	68.2	-29.2	2.53 H	10	22.1	16.9
9	21345.00	42.6 PK	74.0	-31.4	3.05 H	69	44.2	-1.6
10	21345.00	31.9 AV	54.0	-22.1	3.05 H	69	33.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	115.1 PK			1.10 V	274	106.1	9.0
2	*7115.00	105.5 AV			1.10 V	274	96.5	9.0
3	#7125.00	86.0 PK	88.2	-2.2	1.10 V	274	77.0	9.0
4	#7125.00	66.7 AV	68.2	-1.5	1.10 V	274	57.7	9.0
5	7250.00	54.1 PK	74.0	-19.9	1.10 V	274	44.8	9.3
6	7250.00	43.9 AV	54.0	-10.1	1.10 V	274	34.6	9.3
7	#14230.00	50.0 PK	88.2	-38.2	2.58 V	11	33.1	16.9
8	#14230.00	39.2 AV	68.2	-29.0	2.58 V	11	22.3	16.9
9	21345.00	42.5 PK	74.0	-31.5	3.04 V	67	44.1	-1.6
10	21345.00	31.6 AV	54.0	-22.4	3.04 V	67	33.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.9 PK	88.2	-18.3	2.10 H	229	65.5	4.4
2	#5925.00	51.6 AV	68.2	-16.6	2.10 H	229	47.2	4.4
3	*5955.00	115.4 PK			2.10 H	229	110.9	4.5
4	*5955.00	104.7 AV			2.10 H	229	100.2	4.5
5	11910.00	50.1 PK	74.0	-23.9	2.46 H	0	36.4	13.7
6	11910.00	37.9 AV	54.0	-16.1	2.46 H	0	24.2	13.7
7	17865.00	43.3 PK	74.0	-30.7	3.20 H	68	19.0	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.20 H	68	7.6	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.0 PK	88.2	-17.2	1.38 V	240	66.6	4.4
2	#5925.00	52.9 AV	68.2	-15.3	1.38 V	240	48.5	4.4
3	*5955.00	115.7 PK			1.38 V	240	111.2	4.5
4	*5955.00	105.0 AV			1.38 V	240	100.5	4.5
5	11910.00	50.5 PK	74.0	-23.5	2.44 V	0	36.8	13.7
6	11910.00	38.1 AV	54.0	-15.9	2.44 V	0	24.4	13.7
7	17865.00	42.7 PK	74.0	-31.3	3.18 V	70	18.4	24.3
8	17865.00	31.4 AV	54.0	-22.6	3.18 V	70	7.1	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.9 PK			1.10 H	231	109.5	6.4
2	*6475.00	104.5 AV			1.10 H	231	98.1	6.4
3	#12950.00	49.4 PK	88.2	-38.8	2.44 H	0	34.7	14.7
4	#12950.00	37.5 AV	68.2	-30.7	2.44 H	0	22.8	14.7
5	19425.00	43.1 PK	74.0	-30.9	3.15 H	79	46.9	-3.8
6	19425.00	32.1 AV	54.0	-21.9	3.15 H	79	35.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.28 V	270	110.7	6.4
2	*6475.00	105.7 AV			1.28 V	270	99.3	6.4
3	#12950.00	50.1 PK	88.2	-38.1	2.41 V	0	35.4	14.7
4	#12950.00	38.2 AV	68.2	-30.0	2.41 V	0	23.5	14.7
5	19425.00	42.8 PK	74.0	-31.2	3.16 V	86	46.6	-3.8
6	19425.00	31.6 AV	54.0	-22.4	3.16 V	86	35.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.9 PK			1.11 H	225	109.9	7.0
2	*6695.00	105.1 AV			1.11 H	225	98.1	7.0
3	13390.00	50.5 PK	74.0	-23.5	2.48 H	0	35.2	15.3
4	13390.00	38.2 AV	54.0	-15.8	2.48 H	0	22.9	15.3
5	20085.00	42.8 PK	74.0	-31.2	3.22 H	90	46.3	-3.5
6	20085.00	31.8 AV	54.0	-22.2	3.22 H	90	35.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.0 PK			1.33 V	245	110.0	7.0
2	*6695.00	105.5 AV			1.33 V	245	98.5	7.0
3	13390.00	49.8 PK	74.0	-24.2	2.45 V	0	34.5	15.3
4	13390.00	37.7 AV	54.0	-16.3	2.45 V	0	22.4	15.3
5	20085.00	43.2 PK	74.0	-30.8	3.19 V	86	46.7	-3.5
6	20085.00	32.0 AV	54.0	-22.0	3.19 V	86	35.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.2 PK			2.00 H	228	92.2	9.0
2	*7115.00	90.9 AV			2.00 H	228	81.9	9.0
3	#7125.00	86.5 PK	88.2	-1.7	2.00 H	228	77.5	9.0
4	#7125.00	59.5 AV	68.2	-8.7	2.00 H	228	50.5	9.0
5	7250.00	55.8 PK	74.0	-18.2	2.00 H	228	46.5	9.3
6	7250.00	43.9 AV	54.0	-10.1	2.00 H	228	34.6	9.3
7	#14230.00	49.8 PK	88.2	-38.4	2.45 H	0	32.9	16.9
8	#14230.00	37.5 AV	68.2	-30.7	2.45 H	0	20.6	16.9
9	21345.00	42.9 PK	74.0	-31.1	3.19 H	68	44.5	-1.6
10	21345.00	31.5 AV	54.0	-22.5	3.19 H	68	33.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.5 PK			1.11 V	275	90.5	9.0
2	*7115.00	91.3 AV			1.11 V	275	82.3	9.0
3	#7125.00	86.6 PK	88.2	-1.6	1.11 V	275	77.6	9.0
4	#7125.00	59.4 AV	68.2	-8.8	1.11 V	275	50.4	9.0
5	7250.00	54.8 PK	74.0	-19.2	1.11 V	275	45.5	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.11 V	275	34.5	9.3
7	#14230.00	50.0 PK	88.2	-38.2	2.43 V	0	33.1	16.9
8	#14230.00	38.1 AV	68.2	-30.1	2.43 V	0	21.2	16.9
9	21345.00	42.8 PK	74.0	-31.2	3.11 V	84	44.4	-1.6
10	21345.00	31.5 AV	54.0	-22.5	3.11 V	84	33.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	2.20 H	229	71.7	4.4
2	#5925.00	62.5 AV	68.2	-5.7	2.20 H	229	58.1	4.4
3	*5985.00	102.0 PK			2.20 H	229	97.4	4.6
4	*5985.00	90.4 AV			2.20 H	229	85.8	4.6
5	11970.00	49.6 PK	74.0	-24.4	2.61 H	1	35.8	13.8
6	11970.00	38.4 AV	54.0	-15.6	2.61 H	1	24.6	13.8
7	17955.00	42.6 PK	74.0	-31.4	3.12 H	63	15.9	26.7
8	17955.00	31.8 AV	54.0	-22.2	3.12 H	63	5.1	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.6 PK	88.2	-7.6	2.05 V	240	76.2	4.4
2	#5925.00	66.5 AV	68.2	-1.7	2.05 V	240	62.1	4.4
3	*5985.00	106.6 PK			2.05 V	240	102.0	4.6
4	*5985.00	95.2 AV			2.05 V	240	90.6	4.6
5	11970.00	49.0 PK	74.0	-25.0	2.59 V	19	35.2	13.8
6	11970.00	38.3 AV	54.0	-15.7	2.59 V	19	24.5	13.8
7	17955.00	42.3 PK	74.0	-31.7	3.10 V	38	15.6	26.7
8	17955.00	31.9 AV	54.0	-22.1	3.10 V	38	5.2	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.9 PK			2.45 H	221	103.6	6.3
2	*6465.00	97.8 AV			2.45 H	221	91.5	6.3
3	#12930.00	50.0 PK	88.2	-38.2	2.52 H	0	35.2	14.8
4	#12930.00	39.2 AV	68.2	-29.0	2.52 H	0	24.4	14.8
5	19395.00	42.6 PK	74.0	-31.4	3.13 H	42	46.3	-3.7
6	19395.00	32.0 AV	54.0	-22.0	3.13 H	42	35.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.8 PK			1.11 V	266	105.5	6.3
2	*6465.00	99.3 AV			1.11 V	266	93.0	6.3
3	#12930.00	49.9 PK	88.2	-38.3	2.59 V	2	35.1	14.8
4	#12930.00	39.0 AV	68.2	-29.2	2.59 V	2	24.2	14.8
5	19395.00	42.5 PK	74.0	-31.5	3.15 V	41	46.2	-3.7
6	19395.00	32.1 AV	54.0	-21.9	3.15 V	41	35.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.3 PK			2.45 H	221	102.3	7.0
2	*6705.00	97.5 AV			2.45 H	221	90.5	7.0
3	#13410.00	49.3 PK	88.2	-38.9	2.54 H	16	34.0	15.3
4	#13410.00	38.4 AV	68.2	-29.8	2.54 H	16	23.1	15.3
5	20115.00	42.8 PK	74.0	-31.2	3.06 H	44	46.3	-3.5
6	20115.00	31.9 AV	54.0	-22.1	3.06 H	44	35.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.1 PK			1.02 V	271	105.1	7.0
2	*6705.00	99.9 AV			1.02 V	271	92.9	7.0
3	#13410.00	49.4 PK	88.2	-38.8	2.60 V	4	34.1	15.3
4	#13410.00	38.5 AV	68.2	-29.7	2.60 V	4	23.2	15.3
5	20115.00	42.2 PK	74.0	-31.8	3.10 V	52	45.7	-3.5
6	20115.00	31.5 AV	54.0	-22.5	3.10 V	52	35.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.0 PK			2.11 H	228	101.7	8.3
2	*7025.00	100.1 AV			2.11 H	228	91.8	8.3
3	#7125.00	76.2 PK	88.2	-12.0	2.11 H	228	67.2	9.0
4	#7125.00	66.7 AV	68.2	-1.5	2.11 H	228	57.7	9.0
5	7250.00	58.6 PK	74.0	-15.4	2.11 H	228	49.3	9.3
6	7250.00	45.2 AV	54.0	-8.8	2.11 H	228	35.9	9.3
7	#14050.00	49.8 PK	88.2	-38.4	2.62 H	2	33.2	16.6
8	#14050.00	38.6 AV	68.2	-29.6	2.62 H	2	22.0	16.6
9	21075.00	42.2 PK	74.0	-31.8	3.14 H	58	44.4	-2.2
10	21075.00	31.3 AV	54.0	-22.7	3.14 H	58	33.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.9 PK			1.94 V	276	102.6	8.3
2	*7025.00	99.8 AV			1.94 V	276	91.5	8.3
3	#7125.00	76.4 PK	88.2	-11.8	1.94 V	276	67.4	9.0
4	#7125.00	63.4 AV	68.2	-4.8	1.94 V	276	54.4	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.94 V	276	46.7	9.3
6	7250.00	44.7 AV	54.0	-9.3	1.94 V	276	35.4	9.3
7	#14050.00	49.2 PK	88.2	-39.0	2.55 V	0	32.6	16.6
8	#14050.00	38.3 AV	68.2	-29.9	2.55 V	0	21.7	16.6
9	21075.00	42.5 PK	74.0	-31.5	3.07 V	56	44.7	-2.2
10	21075.00	31.7 AV	54.0	-22.3	3.07 V	56	33.9	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	2.10 H	226	70.3	4.4
2	#5925.00	62.6 AV	68.2	-5.6	2.10 H	226	58.2	4.4
3	*6025.00	101.4 PK			2.10 H	226	96.9	4.5
4	*6025.00	90.1 AV			2.10 H	226	85.6	4.5
5	12050.00	49.8 PK	74.0	-24.2	2.58 H	21	35.7	14.1
6	12050.00	38.8 AV	54.0	-15.2	2.58 H	21	24.7	14.1
7	18075.00	43.1 PK	74.0	-30.9	3.10 H	46	47.8	-4.7
8	18075.00	32.1 AV	54.0	-21.9	3.10 H	46	36.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.0 PK	88.2	-7.2	1.90 V	250	76.6	4.4
2	#5925.00	66.0 AV	68.2	-2.2	1.90 V	250	61.6	4.4
3	*6025.00	105.9 PK			1.90 V	250	101.4	4.5
4	*6025.00	93.0 AV			1.90 V	250	88.5	4.5
5	12050.00	50.2 PK	74.0	-23.8	2.52 V	0	36.1	14.1
6	12050.00	39.0 AV	54.0	-15.0	2.52 V	0	24.9	14.1
7	18075.00	42.4 PK	74.0	-31.6	3.16 V	66	47.1	-4.7
8	18075.00	31.5 AV	54.0	-22.5	3.16 V	66	36.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.6 PK			1.00 H	211	99.9	6.7
2	*6505.00	95.3 AV			1.00 H	211	88.6	6.7
3	#13010.00	49.9 PK	88.2	-38.3	2.52 H	7	35.3	14.6
4	#13010.00	39.1 AV	68.2	-29.1	2.52 H	7	24.5	14.6
5	19515.00	42.3 PK	74.0	-31.7	3.11 H	63	46.4	-4.1
6	19515.00	31.8 AV	54.0	-22.2	3.11 H	63	35.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			2.09 V	263	101.2	6.7
2	*6505.00	96.0 AV			2.09 V	263	89.3	6.7
3	#13010.00	49.8 PK	88.2	-38.4	2.57 V	0	35.2	14.6
4	#13010.00	39.0 AV	68.2	-29.2	2.57 V	0	24.4	14.6
5	19515.00	41.9 PK	74.0	-32.1	3.15 V	51	46.0	-4.1
6	19515.00	31.4 AV	54.0	-22.6	3.15 V	51	35.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.3 PK			1.00 H	219	100.4	6.9
2	*6665.00	95.5 AV			1.00 H	219	88.6	6.9
3	13330.00	50.3 PK	74.0	-23.7	2.52 H	0	35.2	15.1
4	13330.00	39.0 AV	54.0	-15.0	2.52 H	0	23.9	15.1
5	19995.00	42.1 PK	74.0	-31.9	3.08 H	43	45.7	-3.6
6	19995.00	31.4 AV	54.0	-22.6	3.08 H	43	35.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.7 PK			2.03 V	262	101.8	6.9
2	*6665.00	96.9 AV			2.03 V	262	90.0	6.9
3	13330.00	49.8 PK	74.0	-24.2	2.61 V	0	34.7	15.1
4	13330.00	38.8 AV	54.0	-15.2	2.61 V	0	23.7	15.1
5	19995.00	42.5 PK	74.0	-31.5	3.04 V	56	46.1	-3.6
6	19995.00	31.6 AV	54.0	-22.4	3.04 V	56	35.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.7 PK			2.10 H	230	99.8	7.9
2	*6985.00	95.3 AV			2.10 H	230	87.4	7.9
3	#7125.00	77.5 PK	88.2	-10.7	2.10 H	230	68.5	9.0
4	#7125.00	65.5 AV	68.2	-2.7	2.10 H	230	56.5	9.0
5	7250.00	67.6 PK	74.0	-6.4	2.10 H	230	58.3	9.3
6	7250.00	52.5 AV	54.0	-1.5	2.10 H	230	43.2	9.3
7	#13970.00	49.3 PK	88.2	-38.9	2.60 H	0	32.6	16.7
8	#13970.00	38.5 AV	68.2	-29.7	2.60 H	0	21.8	16.7
9	20955.00	42.3 PK	74.0	-31.7	3.13 H	53	45.0	-2.7
10	20955.00	31.4 AV	54.0	-22.6	3.13 H	53	34.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.1 PK			1.08 V	275	99.2	7.9
2	*6985.00	96.6 AV			1.08 V	275	88.7	7.9
3	#7125.00	79.4 PK	88.2	-8.8	1.08 V	275	70.4	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.08 V	275	55.7	9.0
5	7250.00	64.4 PK	74.0	-9.6	1.08 V	275	55.1	9.3
6	7250.00	52.5 AV	54.0	-1.5	1.08 V	275	43.2	9.3
7	#13970.00	49.4 PK	88.2	-38.8	2.62 V	0	32.7	16.7
8	#13970.00	38.4 AV	68.2	-29.8	2.62 V	0	21.7	16.7
9	20955.00	41.9 PK	74.0	-32.1	3.15 V	50	44.6	-2.7
10	20955.00	31.4 AV	54.0	-22.6	3.15 V	50	34.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.8 PK	88.2	-10.4	2.21 H	229	73.4	4.4
2	#5925.00	63.1 AV	68.2	-5.1	2.21 H	229	58.7	4.4
3	*6025.00	102.9 PK			2.21 H	229	98.4	4.5
4	*6025.00	90.1 AV			2.21 H	229	85.6	4.5
5	12050.00	49.6 PK	74.0	-24.4	2.53 H	0	35.5	14.1
6	12050.00	38.6 AV	54.0	-15.4	2.53 H	0	24.5	14.1
7	18075.00	42.2 PK	74.0	-31.8	3.05 H	54	46.9	-4.7
8	18075.00	31.4 AV	54.0	-22.6	3.05 H	54	36.1	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.0 PK	88.2	-8.2	1.98 V	275	75.6	4.4
2	#5925.00	66.2 AV	68.2	-2.0	1.98 V	275	61.8	4.4
3	*6025.00	106.0 PK			1.98 V	275	101.5	4.5
4	*6025.00	93.2 AV			1.98 V	275	88.7	4.5
5	12050.00	49.8 PK	74.0	-24.2	2.56 V	0	35.7	14.1
6	12050.00	38.5 AV	54.0	-15.5	2.56 V	0	24.4	14.1
7	18075.00	42.2 PK	74.0	-31.8	3.09 V	38	46.9	-4.7
8	18075.00	31.4 AV	54.0	-22.6	3.09 V	38	36.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.8 PK			2.43 H	211	99.1	6.7
2	*6505.00	93.8 AV			2.43 H	211	87.1	6.7
3	#13010.00	49.7 PK	88.2	-38.5	2.56 H	0	35.1	14.6
4	#13010.00	38.7 AV	68.2	-29.5	2.56 H	0	24.1	14.6
5	19515.00	41.8 PK	74.0	-32.2	3.08 H	51	45.9	-4.1
6	19515.00	31.3 AV	54.0	-22.7	3.08 H	51	35.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.6 PK			1.95 V	259	101.9	6.7
2	*6505.00	96.0 AV			1.95 V	259	89.3	6.7
3	#13010.00	50.2 PK	88.2	-38.0	2.52 V	4	35.6	14.6
4	#13010.00	39.0 AV	68.2	-29.2	2.52 V	4	24.4	14.6
5	19515.00	41.8 PK	74.0	-32.2	3.05 V	57	45.9	-4.1
6	19515.00	31.4 AV	54.0	-22.6	3.05 V	57	35.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.0 PK			2.37 H	218	99.1	6.9
2	*6665.00	94.3 AV			2.37 H	218	87.4	6.9
3	13330.00	49.3 PK	74.0	-24.7	2.51 H	1	34.2	15.1
4	13330.00	38.5 AV	54.0	-15.5	2.51 H	1	23.4	15.1
5	19995.00	42.4 PK	74.0	-31.6	3.09 H	44	46.0	-3.6
6	19995.00	31.7 AV	54.0	-22.3	3.09 H	44	35.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.2 PK			1.93 V	269	101.3	6.9
2	*6665.00	95.8 AV			1.93 V	269	88.9	6.9
3	13330.00	49.2 PK	74.0	-24.8	2.51 V	6	34.1	15.1
4	13330.00	38.5 AV	54.0	-15.5	2.51 V	6	23.4	15.1
5	19995.00	42.2 PK	74.0	-31.8	3.12 V	61	45.8	-3.6
6	19995.00	31.4 AV	54.0	-22.6	3.12 V	61	35.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	24 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.0 PK			2.18 H	228	98.1	7.9
2	*6985.00	95.2 AV			2.18 H	228	87.3	7.9
3	#7125.00	77.2 PK	88.2	-11.0	2.18 H	228	68.2	9.0
4	#7125.00	65.1 AV	68.2	-3.1	2.18 H	228	56.1	9.0
5	7250.00	66.1 PK	74.0	-7.9	2.18 H	228	56.8	9.3
6	7250.00	52.3 AV	54.0	-1.7	2.18 H	228	43.0	9.3
7	#13970.00	49.5 PK	88.2	-38.7	2.59 H	19	32.8	16.7
8	#13970.00	38.7 AV	68.2	-29.5	2.59 H	19	22.0	16.7
9	20955.00	42.1 PK	74.0	-31.9	3.07 H	51	44.8	-2.7
10	20955.00	31.4 AV	54.0	-22.6	3.07 H	51	34.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.3 PK			1.23 V	272	98.4	7.9
2	*6985.00	96.4 AV			1.23 V	272	88.5	7.9
3	#7125.00	77.8 PK	88.2	-10.4	1.23 V	272	68.8	9.0
4	#7125.00	65.7 AV	68.2	-2.5	1.23 V	272	56.7	9.0
5	7250.00	66.8 PK	74.0	-7.2	1.23 V	272	57.5	9.3
6	7250.00	52.0 AV	54.0	-2.0	1.23 V	272	42.7	9.3
7	#13970.00	50.2 PK	88.2	-38.0	2.57 V	0	33.5	16.7
8	#13970.00	39.2 AV	68.2	-29.0	2.57 V	0	22.5	16.7
9	20955.00	41.9 PK	74.0	-32.1	3.11 V	55	44.6	-2.7
10	20955.00	31.3 AV	54.0	-22.7	3.11 V	55	34.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode A

2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	1.09 H	234	73.7	4.4
2	#5925.00	63.7 AV	68.2	-4.5	1.09 H	234	59.3	4.4
3	*5955.00	117.8 PK			1.09 H	234	113.3	4.5
4	*5955.00	107.8 AV			1.09 H	234	103.3	4.5
5	11910.00	47.0 PK	74.0	-27.0	2.27 H	191	33.3	13.7
6	11910.00	35.1 AV	54.0	-18.9	2.27 H	191	21.4	13.7
7	17865.00	53.2 PK	74.0	-20.8	1.39 H	329	28.9	24.3
8	17865.00	37.7 AV	54.0	-16.3	1.39 H	329	13.4	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	1.94 V	258	73.0	4.4
2	#5925.00	63.3 AV	68.2	-4.9	1.94 V	258	58.9	4.4
3	*5955.00	117.7 PK			1.94 V	258	113.2	4.5
4	*5955.00	107.8 AV			1.94 V	258	103.3	4.5
5	11910.00	47.2 PK	74.0	-26.8	2.24 V	184	33.5	13.7
6	11910.00	35.4 AV	54.0	-18.6	2.24 V	184	21.7	13.7
7	17865.00	56.3 PK	74.0	-17.7	3.89 V	310	32.0	24.3
8	17865.00	44.0 AV	54.0	-10.0	3.89 V	310	19.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			1.12 H	12	111.8	4.8
2	*6195.00	107.9 AV			1.12 H	12	103.1	4.8
3	12390.00	47.7 PK	74.0	-26.3	2.23 H	180	33.8	13.9
4	12390.00	35.7 AV	54.0	-18.3	2.23 H	180	21.8	13.9
5	18585.00	53.6 PK	74.0	-20.4	1.43 H	331	58.6	-5.0
6	18585.00	38.2 AV	54.0	-15.8	1.43 H	331	43.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.5 PK			1.99 V	259	113.7	4.8
2	*6195.00	108.9 AV			1.99 V	259	104.1	4.8
3	12390.00	47.9 PK	74.0	-26.1	2.28 V	196	34.0	13.9
4	12390.00	35.8 AV	54.0	-18.2	2.28 V	196	21.9	13.9
5	18585.00	56.2 PK	74.0	-17.8	3.94 V	300	61.2	-5.0
6	18585.00	43.6 AV	54.0	-10.4	3.94 V	300	48.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.9 PK			1.15 H	0	109.7	6.2
2	*6415.00	107.4 AV			1.15 H	0	101.2	6.2
3	#12830.00	47.3 PK	88.2	-40.9	2.23 H	195	32.8	14.5
4	#12830.00	35.8 AV	68.2	-32.4	2.23 H	195	21.3	14.5
5	19245.00	53.6 PK	74.0	-20.4	1.46 H	331	57.4	-3.8
6	19245.00	38.4 AV	54.0	-15.6	1.46 H	331	42.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.99 V	260	111.9	6.2
2	*6415.00	108.2 AV			1.99 V	260	102.0	6.2
3	#12830.00	47.6 PK	88.2	-40.6	2.29 V	180	33.1	14.5
4	#12830.00	35.6 AV	68.2	-32.6	2.29 V	180	21.1	14.5
5	19245.00	60.0 PK	74.0	-14.0	2.58 V	200	63.8	-3.8
6	19245.00	48.2 AV	54.0	-5.8	2.58 V	200	52.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.5 PK			1.11 H	25	110.3	6.2
2	*6435.00	108.0 AV			1.11 H	25	101.8	6.2
3	#12870.00	47.1 PK	88.2	-41.1	2.28 H	179	32.4	14.7
4	#12870.00	35.1 AV	68.2	-33.1	2.28 H	179	20.4	14.7
5	19305.00	53.4 PK	74.0	-20.6	1.37 H	315	57.1	-3.7
6	19305.00	38.2 AV	54.0	-15.8	1.37 H	315	41.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.6 PK			1.96 V	265	111.4	6.2
2	*6435.00	107.5 AV			1.96 V	265	101.3	6.2
3	#12870.00	47.4 PK	88.2	-40.8	2.19 V	189	32.7	14.7
4	#12870.00	35.7 AV	68.2	-32.5	2.19 V	189	21.0	14.7
5	19305.00	59.1 PK	74.0	-14.9	2.63 V	199	62.8	-3.7
6	19305.00	46.5 AV	54.0	-7.5	2.63 V	199	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.3 PK			1.15 H	21	109.9	6.4
2	*6475.00	107.7 AV			1.15 H	21	101.3	6.4
3	#12950.00	47.2 PK	88.2	-41.0	2.22 H	186	32.5	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.22 H	186	20.6	14.7
5	19425.00	53.2 PK	74.0	-20.8	1.48 H	334	57.0	-3.8
6	19425.00	37.8 AV	54.0	-16.2	1.48 H	334	41.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.97 V	255	110.7	6.4
2	*6475.00	107.4 AV			1.97 V	255	101.0	6.4
3	#12950.00	46.8 PK	88.2	-41.4	2.26 V	192	32.1	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.26 V	192	20.6	14.7
5	19425.00	60.0 PK	74.0	-14.0	2.39 V	169	63.8	-3.8
6	19425.00	46.4 AV	54.0	-7.6	2.39 V	169	50.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.5 PK			1.14 H	2	109.8	6.7
2	*6515.00	107.8 AV			1.14 H	2	101.1	6.7
3	#13030.00	47.4 PK	88.2	-40.8	2.29 H	198	32.8	14.6
4	#13030.00	35.3 AV	68.2	-32.9	2.29 H	198	20.7	14.6
5	19545.00	53.3 PK	74.0	-20.7	1.45 H	341	57.4	-4.1
6	19545.00	38.1 AV	54.0	-15.9	1.45 H	341	42.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.5 PK			1.97 V	251	110.8	6.7
2	*6515.00	107.8 AV			1.97 V	251	101.1	6.7
3	#13030.00	47.9 PK	88.2	-40.3	2.26 V	176	33.3	14.6
4	#13030.00	35.9 AV	68.2	-32.3	2.26 V	176	21.3	14.6
5	19545.00	56.6 PK	74.0	-17.4	1.69 V	215	60.7	-4.1
6	19545.00	42.8 AV	54.0	-11.2	1.69 V	215	46.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.9 PK			1.17 H	16	110.1	6.8
2	*6535.00	108.0 AV			1.17 H	16	101.2	6.8
3	#13070.00	47.4 PK	88.2	-40.8	2.28 H	181	32.7	14.7
4	#13070.00	35.7 AV	68.2	-32.5	2.28 H	181	21.0	14.7
5	19605.00	53.2 PK	74.0	-20.8	1.43 H	340	57.2	-4.0
6	19605.00	38.0 AV	54.0	-16.0	1.43 H	340	42.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.0 PK			1.92 V	265	111.2	6.8
2	*6535.00	107.9 AV			1.92 V	265	101.1	6.8
3	#13070.00	47.4 PK	88.2	-40.8	2.23 V	191	32.7	14.7
4	#13070.00	35.4 AV	68.2	-32.8	2.23 V	191	20.7	14.7
5	19605.00	57.1 PK	74.0	-16.9	4.00 V	338	61.1	-4.0
6	19605.00	43.7 AV	54.0	-10.3	4.00 V	338	47.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			1.09 H	12	109.7	7.0
2	*6695.00	108.3 AV			1.09 H	12	101.3	7.0
3	13390.00	47.3 PK	74.0	-26.7	2.22 H	179	32.0	15.3
4	13390.00	35.6 AV	54.0	-18.4	2.22 H	179	20.3	15.3
5	20085.00	54.0 PK	74.0	-20.0	1.48 H	346	57.5	-3.5
6	20085.00	38.6 AV	54.0	-15.4	1.48 H	346	42.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.7 PK			1.97 V	249	110.7	7.0
2	*6695.00	107.9 AV			1.97 V	249	100.9	7.0
3	13390.00	47.6 PK	74.0	-26.4	2.28 V	187	32.3	15.3
4	13390.00	35.8 AV	54.0	-18.2	2.28 V	187	20.5	15.3
5	20085.00	56.5 PK	74.0	-17.5	1.76 V	230	60.0	-3.5
6	20085.00	42.3 AV	54.0	-11.7	1.76 V	230	45.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			1.08 H	27	109.9	7.0
2	*6855.00	108.1 AV			1.08 H	27	101.1	7.0
3	#13710.00	47.0 PK	88.2	-41.2	2.22 H	170	30.7	16.3
4	#13710.00	35.1 AV	68.2	-33.1	2.22 H	170	18.8	16.3
5	20565.00	53.2 PK	74.0	-20.8	1.41 H	330	56.5	-3.3
6	20565.00	38.0 AV	54.0	-16.0	1.41 H	330	41.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.98 V	266	110.8	7.0
2	*6855.00	107.8 AV			1.98 V	266	100.8	7.0
3	#13710.00	47.2 PK	88.2	-41.0	2.25 V	180	30.9	16.3
4	#13710.00	35.7 AV	68.2	-32.5	2.25 V	180	19.4	16.3
5	20565.00	53.8 PK	74.0	-20.2	1.53 V	214	57.1	-3.3
6	20565.00	40.7 AV	54.0	-13.3	1.53 V	214	44.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.3 PK			1.10 H	1	109.2	7.1
2	*6875.00	107.9 AV			1.10 H	1	100.8	7.1
3	#13750.00	46.8 PK	88.2	-41.4	2.25 H	186	30.7	16.1
4	#13750.00	35.1 AV	68.2	-33.1	2.25 H	186	19.0	16.1
5	20625.00	53.2 PK	74.0	-20.8	1.42 H	326	56.5	-3.3
6	20625.00	37.9 AV	54.0	-16.1	1.42 H	326	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.5 PK			1.95 V	269	110.4	7.1
2	*6875.00	107.9 AV			1.95 V	269	100.8	7.1
3	#13750.00	47.6 PK	88.2	-40.6	2.24 V	176	31.5	16.1
4	#13750.00	35.8 AV	68.2	-32.4	2.24 V	176	19.7	16.1
5	20625.00	53.7 PK	74.0	-20.3	1.70 V	309	57.0	-3.3
6	20625.00	40.0 AV	54.0	-14.0	1.70 V	309	43.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.1 PK			1.11 H	16	108.2	7.9
2	*6995.00	107.5 AV			1.11 H	16	99.6	7.9
3	#13990.00	47.3 PK	88.2	-40.9	2.21 H	175	30.6	16.7
4	#13990.00	35.3 AV	68.2	-32.9	2.21 H	175	18.6	16.7
5	20985.00	53.5 PK	74.0	-20.5	1.48 H	326	56.3	-2.8
6	20985.00	38.0 AV	54.0	-16.0	1.48 H	326	40.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.2 PK			1.93 V	244	109.3	7.9
2	*6995.00	107.5 AV			1.93 V	244	99.6	7.9
3	#13990.00	47.7 PK	88.2	-40.5	2.31 V	162	31.0	16.7
4	#13990.00	35.7 AV	68.2	-32.5	2.31 V	162	19.0	16.7
5	20985.00	56.3 PK	74.0	-17.7	3.90 V	289	59.1	-2.8
6	20985.00	43.5 AV	54.0	-10.5	3.90 V	289	46.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.8 PK			1.01 H	227	96.8	9.0
2	*7115.00	101.0 AV			1.01 H	227	92.0	9.0
3	#7125.00	80.1 PK	88.2	-8.1	1.01 H	227	71.1	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.01 H	227	57.4	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.01 H	227	46.8	9.3
6	7250.00	43.9 AV	54.0	-10.1	1.01 H	227	34.6	9.3
7	#14230.00	46.8 PK	88.2	-41.4	2.19 H	192	29.9	16.9
8	#14230.00	35.0 AV	68.2	-33.2	2.19 H	192	18.1	16.9
9	21345.00	53.8 PK	74.0	-20.2	1.43 H	329	55.4	-1.6
10	21345.00	38.1 AV	54.0	-15.9	1.43 H	329	39.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.7 PK			1.92 V	25	96.7	9.0
2	*7115.00	100.2 AV			1.92 V	25	91.2	9.0
3	#7125.00	79.2 PK	88.2	-9.0	1.92 V	25	70.2	9.0
4	#7125.00	66.2 AV	68.2	-2.0	1.92 V	25	57.2	9.0
5	7250.00	56.3 PK	74.0	-17.7	1.92 V	25	47.0	9.3
6	7250.00	45.2 AV	54.0	-8.8	1.92 V	25	35.9	9.3
7	#14230.00	47.8 PK	88.2	-40.4	2.31 V	173	30.9	16.9
8	#14230.00	36.1 AV	68.2	-32.1	2.31 V	173	19.2	16.9
9	21345.00	40.4 PK	74.0	-33.6	3.18 V	170	42.0	-1.6
10	21345.00	25.1 AV	54.0	-28.9	3.18 V	170	26.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Mode A

2Tx NSS2(SU)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	2.19 H	229	72.8	4.4
2	#5925.00	64.1 AV	68.2	-4.1	2.19 H	229	59.7	4.4
3	*5955.00	117.1 PK			2.19 H	229	112.6	4.5
4	*5955.00	105.5 AV			2.19 H	229	101.0	4.5
5	11910.00	47.1 PK	74.0	-26.9	2.20 H	170	33.4	13.7
6	11910.00	35.3 AV	54.0	-18.7	2.20 H	170	21.6	13.7
7	17865.00	53.5 PK	74.0	-20.5	1.42 H	341	29.2	24.3
8	17865.00	38.2 AV	54.0	-15.8	1.42 H	341	13.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	2.06 V	268	73.0	4.4
2	#5925.00	65.0 AV	68.2	-3.2	2.06 V	268	60.6	4.4
3	*5955.00	116.2 PK			2.06 V	268	111.7	4.5
4	*5955.00	105.5 AV			2.06 V	268	101.0	4.5
5	11910.00	48.1 PK	74.0	-25.9	2.28 V	162	34.4	13.7
6	11910.00	35.9 AV	54.0	-18.1	2.28 V	162	22.2	13.7
7	17865.00	55.9 PK	74.0	-18.1	3.90 V	307	31.6	24.3
8	17865.00	43.6 AV	54.0	-10.4	3.90 V	307	19.3	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.6 PK			2.23 H	240	112.8	4.8
2	*6195.00	105.9 AV			2.23 H	240	101.1	4.8
3	12390.00	47.7 PK	74.0	-26.3	2.27 H	196	33.8	13.9
4	12390.00	35.7 AV	54.0	-18.3	2.27 H	196	21.8	13.9
5	18585.00	48.6 PK	74.0	-25.4	3.53 H	229	53.6	-5.0
6	18585.00	35.2 AV	54.0	-18.8	3.53 H	229	40.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.9 PK			2.11 V	268	112.1	4.8
2	*6195.00	106.0 AV			2.11 V	268	101.2	4.8
3	12390.00	47.9 PK	74.0	-26.1	2.26 V	183	34.0	13.9
4	12390.00	36.2 AV	54.0	-17.8	2.26 V	183	22.3	13.9
5	18585.00	52.8 PK	74.0	-21.2	3.86 V	299	57.8	-5.0
6	18585.00	40.6 AV	54.0	-13.4	3.86 V	299	45.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.0 PK			2.22 H	221	110.8	6.2
2	*6415.00	105.1 AV			2.22 H	221	98.9	6.2
3	#12830.00	47.3 PK	88.2	-40.9	2.28 H	192	32.8	14.5
4	#12830.00	35.6 AV	68.2	-32.6	2.28 H	192	21.1	14.5
5	19245.00	51.2 PK	74.0	-22.8	1.32 H	331	55.0	-3.8
6	19245.00	35.8 AV	54.0	-18.2	1.32 H	331	39.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.7 PK			2.11 V	274	110.5	6.2
2	*6415.00	105.9 AV			2.11 V	274	99.7	6.2
3	#12830.00	47.8 PK	88.2	-40.4	2.32 V	189	33.3	14.5
4	#12830.00	35.7 AV	68.2	-32.5	2.32 V	189	21.2	14.5
5	19245.00	48.5 PK	74.0	-25.5	2.64 V	215	52.3	-3.8
6	19245.00	33.5 AV	54.0	-20.5	2.64 V	215	37.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.3 PK			2.23 H	239	111.1	6.2
2	*6435.00	105.8 AV			2.23 H	239	99.6	6.2
3	#12870.00	47.5 PK	88.2	-40.7	2.22 H	186	32.8	14.7
4	#12870.00	35.8 AV	68.2	-32.4	2.22 H	186	21.1	14.7
5	19305.00	48.3 PK	74.0	-25.7	3.49 H	243	52.0	-3.7
6	19305.00	35.2 AV	54.0	-18.8	3.49 H	243	38.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.8 PK			2.02 V	262	109.6	6.2
2	*6435.00	105.2 AV			2.02 V	262	99.0	6.2
3	#12870.00	48.1 PK	88.2	-40.1	2.29 V	183	33.4	14.7
4	#12870.00	36.2 AV	68.2	-32.0	2.29 V	183	21.5	14.7
5	19305.00	55.5 PK	74.0	-18.5	2.70 V	216	59.2	-3.7
6	19305.00	43.8 AV	54.0	-10.2	2.70 V	216	47.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.7 PK			2.19 H	235	110.3	6.4
2	*6475.00	105.3 AV			2.19 H	235	98.9	6.4
3	#12950.00	47.5 PK	88.2	-40.7	2.23 H	172	32.8	14.7
4	#12950.00	35.4 AV	68.2	-32.8	2.23 H	172	20.7	14.7
5	19425.00	48.8 PK	74.0	-25.2	3.55 H	232	52.6	-3.8
6	19425.00	35.2 AV	54.0	-18.8	3.55 H	232	39.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.0 PK			2.11 V	256	109.6	6.4
2	*6475.00	105.5 AV			2.11 V	256	99.1	6.4
3	#12950.00	48.5 PK	88.2	-39.7	2.30 V	191	33.8	14.7
4	#12950.00	36.4 AV	68.2	-31.8	2.30 V	191	21.7	14.7
5	19425.00	58.0 PK	74.0	-16.0	2.92 V	216	61.8	-3.8
6	19425.00	45.5 AV	54.0	-8.5	2.92 V	216	49.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.5 PK			2.19 H	230	109.8	6.7
2	*6515.00	105.1 AV			2.19 H	230	98.4	6.7
3	#13030.00	47.2 PK	88.2	-41.0	2.24 H	192	32.6	14.6
4	#13030.00	35.5 AV	68.2	-32.7	2.24 H	192	20.9	14.6
5	19545.00	49.1 PK	74.0	-24.9	3.58 H	235	53.2	-4.1
6	19545.00	35.6 AV	54.0	-18.4	3.58 H	235	39.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.9 PK			2.08 V	269	109.2	6.7
2	*6515.00	105.1 AV			2.08 V	269	98.4	6.7
3	#13030.00	48.3 PK	88.2	-39.9	2.22 V	161	33.7	14.6
4	#13030.00	36.2 AV	68.2	-32.0	2.22 V	161	21.6	14.6
5	19545.00	55.9 PK	74.0	-18.1	2.14 V	234	60.0	-4.1
6	19545.00	44.8 AV	54.0	-9.2	2.14 V	234	48.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.9 PK			2.18 H	241	109.1	6.8
2	*6535.00	104.7 AV			2.18 H	241	97.9	6.8
3	#13070.00	46.8 PK	88.2	-41.4	2.26 H	194	32.1	14.7
4	#13070.00	34.9 AV	68.2	-33.3	2.26 H	194	20.2	14.7
5	19605.00	48.9 PK	74.0	-25.1	3.51 H	244	52.9	-4.0
6	19605.00	35.3 AV	54.0	-18.7	3.51 H	244	39.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			2.10 V	257	109.3	6.8
2	*6535.00	105.6 AV			2.10 V	257	98.8	6.8
3	#13070.00	48.3 PK	88.2	-39.9	2.30 V	169	33.6	14.7
4	#13070.00	36.2 AV	68.2	-32.0	2.30 V	169	21.5	14.7
5	19605.00	55.6 PK	74.0	-18.4	3.56 V	227	59.6	-4.0
6	19605.00	42.9 AV	54.0	-11.1	3.56 V	227	46.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.0 PK			2.13 H	242	109.0	7.0
2	*6695.00	104.8 AV			2.13 H	242	97.8	7.0
3	13390.00	47.6 PK	74.0	-26.4	2.20 H	179	32.3	15.3
4	13390.00	35.6 AV	54.0	-18.4	2.20 H	179	20.3	15.3
5	20085.00	48.2 PK	74.0	-25.8	3.52 H	244	51.7	-3.5
6	20085.00	34.7 AV	54.0	-19.3	3.52 H	244	38.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.4 PK			2.04 V	274	109.4	7.0
2	*6695.00	105.4 AV			2.04 V	274	98.4	7.0
3	13390.00	48.1 PK	74.0	-25.9	2.25 V	163	32.8	15.3
4	13390.00	35.8 AV	54.0	-18.2	2.25 V	163	20.5	15.3
5	20085.00	55.5 PK	74.0	-18.5	3.59 V	213	59.0	-3.5
6	20085.00	42.8 AV	54.0	-11.2	3.59 V	213	46.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.6 PK			2.18 H	217	109.6	7.0
2	*6855.00	105.2 AV			2.18 H	217	98.2	7.0
3	#13710.00	46.9 PK	88.2	-41.3	2.24 H	194	30.6	16.3
4	#13710.00	35.1 AV	68.2	-33.1	2.24 H	194	18.8	16.3
5	20565.00	47.9 PK	74.0	-26.1	3.54 H	229	51.2	-3.3
6	20565.00	34.7 AV	54.0	-19.3	3.54 H	229	38.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.1 PK			2.11 V	270	109.1	7.0
2	*6855.00	105.2 AV			2.11 V	270	98.2	7.0
3	#13710.00	47.4 PK	88.2	-40.8	2.24 V	179	31.1	16.3
4	#13710.00	35.6 AV	68.2	-32.6	2.24 V	179	19.3	16.3
5	20565.00	55.5 PK	74.0	-18.5	3.56 V	230	58.8	-3.3
6	20565.00	43.1 AV	54.0	-10.9	3.56 V	230	46.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.2 PK			2.24 H	217	110.1	7.1
2	*6875.00	105.5 AV			2.24 H	217	98.4	7.1
3	#13750.00	47.5 PK	88.2	-40.7	2.27 H	199	31.4	16.1
4	#13750.00	35.6 AV	68.2	-32.6	2.27 H	199	19.5	16.1
5	20625.00	48.4 PK	74.0	-25.6	3.58 H	225	51.7	-3.3
6	20625.00	35.0 AV	54.0	-19.0	3.58 H	225	38.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.2 PK			2.04 V	269	109.1	7.1
2	*6875.00	105.4 AV			2.04 V	269	98.3	7.1
3	#13750.00	48.0 PK	88.2	-40.2	2.25 V	189	31.9	16.1
4	#13750.00	35.8 AV	68.2	-32.4	2.25 V	189	19.7	16.1
5	20625.00	55.3 PK	74.0	-18.7	3.58 V	228	58.6	-3.3
6	20625.00	42.5 AV	54.0	-11.5	3.58 V	228	45.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.7 PK			2.22 H	241	108.8	7.9
2	*6995.00	105.1 AV			2.22 H	241	97.2	7.9
3	#13990.00	47.7 PK	88.2	-40.5	2.28 H	192	31.0	16.7
4	#13990.00	35.7 AV	68.2	-32.5	2.28 H	192	19.0	16.7
5	20985.00	48.8 PK	74.0	-25.2	3.49 H	223	51.6	-2.8
6	20985.00	35.4 AV	54.0	-18.6	3.49 H	223	38.2	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.6 PK			2.12 V	258	107.7	7.9
2	*6995.00	105.2 AV			2.12 V	258	97.3	7.9
3	#13990.00	48.3 PK	88.2	-39.9	2.29 V	182	31.6	16.7
4	#13990.00	36.0 AV	68.2	-32.2	2.29 V	182	19.3	16.7
5	20985.00	56.2 PK	74.0	-17.8	3.62 V	214	59.0	-2.8
6	20985.00	43.3 AV	54.0	-10.7	3.62 V	214	46.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.3 PK			1.36 H	98	100.3	9.0
2	*7115.00	102.4 AV			1.36 H	98	93.4	9.0
3	#7125.00	78.1 PK	88.2	-10.1	1.36 H	98	69.1	9.0
4	#7125.00	63.4 AV	68.2	-4.8	1.36 H	98	54.4	9.0
5	7250.00	56.4 PK	74.0	-17.6	1.36 H	98	47.1	9.3
6	7250.00	45.4 AV	54.0	-8.6	1.36 H	98	36.1	9.3
7	#14230.00	47.1 PK	88.2	-41.1	2.24 H	178	30.2	16.9
8	#14230.00	35.6 AV	68.2	-32.6	2.24 H	178	18.7	16.9
9	21345.00	53.9 PK	74.0	-20.1	1.38 H	339	55.5	-1.6
10	21345.00	38.5 AV	54.0	-15.5	1.38 H	339	40.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	111.6 PK			1.73 V	35	102.6	9.0
2	*7115.00	104.2 AV			1.73 V	35	95.2	9.0
3	#7125.00	84.6 PK	88.2	-3.6	1.73 V	35	75.6	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.73 V	35	57.5	9.0
5	7250.00	55.7 PK	74.0	-18.3	1.73 V	35	46.4	9.3
6	7250.00	45.5 AV	54.0	-8.5	1.73 V	35	36.2	9.3
7	#14230.00	47.6 PK	88.2	-40.6	2.28 V	164	30.7	16.9
8	#14230.00	35.5 AV	68.2	-32.7	2.28 V	164	18.6	16.9
9	21345.00	40.4 PK	74.0	-33.6	4.00 V	190	42.0	-1.6
10	21345.00	28.1 AV	54.0	-25.9	4.00 V	190	29.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	1.06 H	237	72.8	4.4
2	#5925.00	64.8 AV	68.2	-3.4	1.06 H	237	60.4	4.4
3	*5965.00	110.5 PK			1.06 H	237	106.0	4.5
4	*5965.00	98.9 AV			1.06 H	237	94.4	4.5
5	11930.00	46.8 PK	74.0	-27.2	2.25 H	197	33.1	13.7
6	11930.00	35.1 AV	54.0	-18.9	2.25 H	197	21.4	13.7
7	17895.00	53.5 PK	74.0	-20.5	1.48 H	329	28.6	24.9
8	17895.00	37.9 AV	54.0	-16.1	1.48 H	329	13.0	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.24 V	278	72.4	4.4
2	#5925.00	62.5 AV	68.2	-5.7	1.24 V	278	58.1	4.4
3	*5965.00	110.6 PK			1.24 V	278	106.1	4.5
4	*5965.00	98.4 AV			1.24 V	278	93.9	4.5
5	11930.00	47.7 PK	74.0	-26.3	2.27 V	181	34.0	13.7
6	11930.00	35.9 AV	54.0	-18.1	2.27 V	181	22.2	13.7
7	17895.00	55.6 PK	74.0	-18.4	3.57 V	238	30.7	24.9
8	17895.00	43.1 AV	54.0	-10.9	3.57 V	238	18.2	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	115.0 PK			1.05 H	240	110.1	4.9
2	*6205.00	102.3 AV			1.05 H	240	97.4	4.9
3	12410.00	47.6 PK	74.0	-26.4	2.27 H	173	33.8	13.8
4	12410.00	35.8 AV	54.0	-18.2	2.27 H	173	22.0	13.8
5	18615.00	53.9 PK	74.0	-20.1	1.40 H	336	58.8	-4.9
6	18615.00	38.3 AV	54.0	-15.7	1.40 H	336	43.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.8 PK			1.98 V	255	109.9	4.9
2	*6205.00	102.3 AV			1.98 V	255	97.4	4.9
3	12410.00	47.7 PK	74.0	-26.3	2.23 V	178	33.9	13.8
4	12410.00	35.6 AV	54.0	-18.4	2.23 V	178	21.8	13.8
5	18615.00	53.1 PK	74.0	-20.9	2.22 V	232	58.0	-4.9
6	18615.00	40.5 AV	54.0	-13.5	2.22 V	232	45.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	115.3 PK			1.05 H	245	109.1	6.2
2	*6405.00	102.8 AV			1.05 H	245	96.6	6.2
3	#12810.00	47.7 PK	88.2	-40.5	2.27 H	191	33.3	14.4
4	#12810.00	35.8 AV	68.2	-32.4	2.27 H	191	21.4	14.4
5	19215.00	53.7 PK	74.0	-20.3	1.43 H	324	57.4	-3.7
6	19215.00	38.2 AV	54.0	-15.8	1.43 H	324	41.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	115.3 PK			2.05 V	258	109.1	6.2
2	*6405.00	102.4 AV			2.05 V	258	96.2	6.2
3	#12810.00	48.1 PK	88.2	-40.1	2.32 V	188	33.7	14.4
4	#12810.00	36.2 AV	68.2	-32.0	2.32 V	188	21.8	14.4
5	19215.00	54.0 PK	74.0	-20.0	3.76 V	228	57.7	-3.7
6	19215.00	39.8 AV	54.0	-14.2	3.76 V	228	43.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	115.2 PK			1.03 H	234	109.0	6.2
2	*6445.00	102.8 AV			1.03 H	234	96.6	6.2
3	#12890.00	47.4 PK	88.2	-40.8	2.28 H	197	32.7	14.7
4	#12890.00	35.7 AV	68.2	-32.5	2.28 H	197	21.0	14.7
5	19335.00	53.4 PK	74.0	-20.6	1.37 H	337	57.1	-3.7
6	19335.00	38.1 AV	54.0	-15.9	1.37 H	337	41.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	114.1 PK			1.40 V	327	107.9	6.2
2	*6445.00	101.1 AV			1.40 V	327	94.9	6.2
3	#12890.00	48.2 PK	88.2	-40.0	2.24 V	184	33.5	14.7
4	#12890.00	36.0 AV	68.2	-32.2	2.24 V	184	21.3	14.7
5	19335.00	55.9 PK	74.0	-18.1	3.61 V	241	59.6	-3.7
6	19335.00	43.2 AV	54.0	-10.8	3.61 V	241	46.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.4 PK			1.04 H	238	107.9	6.5
2	*6485.00	101.9 AV			1.04 H	238	95.4	6.5
3	#12970.00	47.2 PK	88.2	-41.0	2.29 H	196	32.6	14.6
4	#12970.00	35.2 AV	68.2	-33.0	2.29 H	196	20.6	14.6
5	19455.00	53.0 PK	74.0	-21.0	1.41 H	321	56.9	-3.9
6	19455.00	37.9 AV	54.0	-16.1	1.41 H	321	41.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.7 PK			2.05 V	260	108.2	6.5
2	*6485.00	102.0 AV			2.05 V	260	95.5	6.5
3	#12970.00	47.8 PK	88.2	-40.4	2.21 V	182	33.2	14.6
4	#12970.00	35.7 AV	68.2	-32.5	2.21 V	182	21.1	14.6
5	19455.00	55.3 PK	74.0	-18.7	3.54 V	227	59.2	-3.9
6	19455.00	42.9 AV	54.0	-11.1	3.54 V	227	46.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	115.4 PK			1.04 H	255	108.6	6.8
2	*6525.00	102.6 AV			1.04 H	255	95.8	6.8
3	#13050.00	47.1 PK	88.2	-41.1	2.27 H	180	32.5	14.6
4	#13050.00	35.1 AV	68.2	-33.1	2.27 H	180	20.5	14.6
5	19575.00	53.7 PK	74.0	-20.3	1.47 H	340	57.8	-4.1
6	19575.00	38.3 AV	54.0	-15.7	1.47 H	340	42.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	114.5 PK			1.80 V	258	107.7	6.8
2	*6525.00	101.9 AV			1.80 V	258	95.1	6.8
3	#13050.00	48.0 PK	88.2	-40.2	2.24 V	175	33.4	14.6
4	#13050.00	36.0 AV	68.2	-32.2	2.24 V	175	21.4	14.6
5	19575.00	55.7 PK	74.0	-18.3	3.51 V	241	59.8	-4.1
6	19575.00	43.0 AV	54.0	-11.0	3.51 V	241	47.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.8 PK			1.04 H	236	108.0	6.8
2	*6565.00	102.0 AV			1.04 H	236	95.2	6.8
3	#13130.00	46.8 PK	88.2	-41.4	2.27 H	186	32.1	14.7
4	#13130.00	34.9 AV	68.2	-33.3	2.27 H	186	20.2	14.7
5	19695.00	53.7 PK	74.0	-20.3	1.39 H	327	57.6	-3.9
6	19695.00	38.4 AV	54.0	-15.6	1.39 H	327	42.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.1 PK			1.25 V	235	106.3	6.8
2	*6565.00	101.2 AV			1.25 V	235	94.4	6.8
3	#13130.00	48.1 PK	88.2	-40.1	2.21 V	161	33.4	14.7
4	#13130.00	35.8 AV	68.2	-32.4	2.21 V	161	21.1	14.7
5	19695.00	55.8 PK	74.0	-18.2	3.53 V	212	59.7	-3.9
6	19695.00	43.2 AV	54.0	-10.8	3.53 V	212	47.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.5 PK			1.00 H	251	107.6	6.9
2	*6685.00	101.6 AV			1.00 H	251	94.7	6.9
3	13370.00	47.1 PK	74.0	-26.9	2.23 H	199	31.9	15.2
4	13370.00	35.5 AV	54.0	-18.5	2.23 H	199	20.3	15.2
5	20055.00	53.8 PK	74.0	-20.2	1.44 H	326	57.3	-3.5
6	20055.00	38.1 AV	54.0	-15.9	1.44 H	326	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.5 PK			1.40 V	260	106.6	6.9
2	*6685.00	101.3 AV			1.40 V	260	94.4	6.9
3	13370.00	48.3 PK	74.0	-25.7	2.28 V	186	33.1	15.2
4	13370.00	36.0 AV	54.0	-18.0	2.28 V	186	20.8	15.2
5	20055.00	55.6 PK	74.0	-18.4	3.50 V	223	59.1	-3.5
6	20055.00	42.6 AV	54.0	-11.4	3.50 V	223	46.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.2 PK			1.04 H	246	107.2	7.0
2	*6845.00	101.6 AV			1.04 H	246	94.6	7.0
3	#13690.00	46.9 PK	88.2	-41.3	2.28 H	188	30.6	16.3
4	#13690.00	35.5 AV	68.2	-32.7	2.28 H	188	19.2	16.3
5	20535.00	54.1 PK	74.0	-19.9	1.48 H	329	57.3	-3.2
6	20535.00	38.7 AV	54.0	-15.3	1.48 H	329	41.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.3 PK			2.00 V	260	108.3	7.0
2	*6845.00	102.4 AV			2.00 V	260	95.4	7.0
3	#13690.00	47.7 PK	88.2	-40.5	2.26 V	183	31.4	16.3
4	#13690.00	35.6 AV	68.2	-32.6	2.26 V	183	19.3	16.3
5	20535.00	55.7 PK	74.0	-18.3	3.52 V	218	58.9	-3.2
6	20535.00	42.7 AV	54.0	-11.3	3.52 V	218	45.9	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.5 PK			1.00 H	242	107.4	7.1
2	*6885.00	101.7 AV			1.00 H	242	94.6	7.1
3	#13770.00	46.9 PK	88.2	-41.3	2.20 H	200	31.0	15.9
4	#13770.00	35.0 AV	68.2	-33.2	2.20 H	200	19.1	15.9
5	20655.00	53.8 PK	74.0	-20.2	1.48 H	334	57.1	-3.3
6	20655.00	38.6 AV	54.0	-15.4	1.48 H	334	41.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.1 PK			2.00 V	260	107.0	7.1
2	*6885.00	100.7 AV			2.00 V	260	93.6	7.1
3	#13770.00	47.7 PK	88.2	-40.5	2.28 V	191	31.8	15.9
4	#13770.00	35.5 AV	68.2	-32.7	2.28 V	191	19.6	15.9
5	20655.00	55.3 PK	74.0	-18.7	3.56 V	218	58.6	-3.3
6	20655.00	42.7 AV	54.0	-11.3	3.56 V	218	46.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	115.0 PK			1.00 H	242	107.3	7.7
2	*6965.00	102.0 AV			1.00 H	242	94.3	7.7
3	#13930.00	46.9 PK	88.2	-41.3	2.27 H	173	30.4	16.5
4	#13930.00	34.9 AV	68.2	-33.3	2.27 H	173	18.4	16.5
5	20895.00	53.4 PK	74.0	-20.6	1.47 H	327	56.1	-2.7
6	20895.00	38.2 AV	54.0	-15.8	1.47 H	327	40.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	114.1 PK			1.21 V	235	106.4	7.7
2	*6965.00	101.8 AV			1.21 V	235	94.1	7.7
3	#13930.00	47.4 PK	88.2	-40.8	2.30 V	187	30.9	16.5
4	#13930.00	35.6 AV	68.2	-32.6	2.30 V	187	19.1	16.5
5	20895.00	55.4 PK	74.0	-18.6	3.55 V	221	58.1	-2.7
6	20895.00	43.0 AV	54.0	-11.0	3.55 V	221	45.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	113.5 PK			1.06 H	226	104.8	8.7
2	*7085.00	100.8 AV			1.06 H	226	92.1	8.7
3	#7125.00	76.6 PK	88.2	-11.6	1.06 H	226	67.6	9.0
4	#7125.00	64.8 AV	68.2	-3.4	1.06 H	226	55.8	9.0
5	7250.00	55.8 PK	74.0	-18.2	1.06 H	226	46.5	9.3
6	7250.00	44.1 AV	54.0	-9.9	1.06 H	226	34.8	9.3
7	#14170.00	47.0 PK	88.2	-41.2	2.23 H	179	30.5	16.5
8	#14170.00	35.4 AV	68.2	-32.8	2.23 H	179	18.9	16.5
9	21255.00	54.0 PK	74.0	-20.0	1.45 H	321	55.4	-1.4
10	21255.00	38.3 AV	54.0	-15.7	1.45 H	321	39.7	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	112.0 PK			2.05 V	256	103.3	8.7
2	*7085.00	98.9 AV			2.05 V	256	90.2	8.7
3	#7125.00	76.8 PK	88.2	-11.4	2.05 V	256	67.8	9.0
4	#7125.00	63.2 AV	68.2	-5.0	2.05 V	256	54.2	9.0
5	7250.00	55.7 PK	74.0	-18.3	2.05 V	256	46.4	9.3
6	7250.00	43.8 AV	54.0	-10.2	2.05 V	256	34.5	9.3
7	#14170.00	47.3 PK	88.2	-40.9	2.24 V	161	30.8	16.5
8	#14170.00	35.4 AV	68.2	-32.8	2.24 V	161	18.9	16.5
9	21255.00	55.8 PK	74.0	-18.2	3.54 V	225	57.2	-1.4
10	21255.00	43.3 AV	54.0	-10.7	3.54 V	225	44.7	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	1.00 H	234	74.4	4.4
2	#5925.00	64.7 AV	68.2	-3.5	1.00 H	234	60.3	4.4
3	*5985.00	107.7 PK			1.00 H	234	103.1	4.6
4	*5985.00	95.5 AV			1.00 H	234	90.9	4.6
5	11970.00	47.2 PK	74.0	-26.8	2.27 H	182	33.4	13.8
6	11970.00	35.5 AV	54.0	-18.5	2.27 H	182	21.7	13.8
7	17955.00	53.4 PK	74.0	-20.6	1.40 H	317	26.7	26.7
8	17955.00	38.2 AV	54.0	-15.8	1.40 H	317	11.5	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.6 PK	88.2	-11.6	2.03 V	270	72.2	4.4
2	#5925.00	65.4 AV	68.2	-2.8	2.03 V	270	61.0	4.4
3	*5985.00	107.8 PK			2.03 V	270	103.2	4.6
4	*5985.00	96.1 AV			2.03 V	270	91.5	4.6
5	11970.00	48.1 PK	74.0	-25.9	2.31 V	185	34.3	13.8
6	11970.00	36.3 AV	54.0	-17.7	2.31 V	185	22.5	13.8
7	17955.00	55.4 PK	74.0	-18.6	3.61 V	226	28.7	26.7
8	17955.00	42.8 AV	54.0	-11.2	3.61 V	226	16.1	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.1 PK			1.05 H	215	106.9	5.2
2	*6225.00	98.8 AV			1.05 H	215	93.6	5.2
3	12450.00	46.9 PK	74.0	-27.1	2.22 H	171	33.2	13.7
4	12450.00	35.3 AV	54.0	-18.7	2.22 H	171	21.6	13.7
5	18675.00	53.4 PK	74.0	-20.6	1.49 H	341	58.3	-4.9
6	18675.00	38.2 AV	54.0	-15.8	1.49 H	341	43.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.8 PK			2.00 V	255	107.6	5.2
2	*6225.00	99.3 AV			2.00 V	255	94.1	5.2
3	12450.00	48.3 PK	74.0	-25.7	2.20 V	175	34.6	13.7
4	12450.00	36.2 AV	54.0	-17.8	2.20 V	175	22.5	13.7
5	18675.00	54.6 PK	74.0	-19.4	2.20 V	233	59.5	-4.9
6	18675.00	42.5 AV	54.0	-11.5	2.20 V	233	47.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.5 PK			1.01 H	211	106.4	6.1
2	*6385.00	99.5 AV			1.01 H	211	93.4	6.1
3	#12770.00	47.0 PK	88.2	-41.2	2.27 H	179	32.7	14.3
4	#12770.00	35.0 AV	68.2	-33.2	2.27 H	179	20.7	14.3
5	19155.00	54.0 PK	74.0	-20.0	1.39 H	331	57.8	-3.8
6	19155.00	38.3 AV	54.0	-15.7	1.39 H	331	42.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.0 PK			3.98 V	255	105.9	6.1
2	*6385.00	98.7 AV			3.98 V	255	92.6	6.1
3	#12770.00	48.5 PK	88.2	-39.7	2.30 V	179	34.2	14.3
4	#12770.00	36.2 AV	68.2	-32.0	2.30 V	179	21.9	14.3
5	19155.00	55.7 PK	74.0	-18.3	3.55 V	229	59.5	-3.8
6	19155.00	42.8 AV	54.0	-11.2	3.55 V	229	46.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.0 PK			1.00 H	230	106.7	6.3
2	*6465.00	100.0 AV			1.00 H	230	93.7	6.3
3	#12930.00	47.6 PK	88.2	-40.6	2.19 H	198	32.8	14.8
4	#12930.00	35.9 AV	68.2	-32.3	2.19 H	198	21.1	14.8
5	19395.00	53.0 PK	74.0	-21.0	1.40 H	330	56.7	-3.7
6	19395.00	37.8 AV	54.0	-16.2	1.40 H	330	41.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.9 PK			2.00 V	280	105.6	6.3
2	*6465.00	98.7 AV			2.00 V	280	92.4	6.3
3	#12930.00	47.4 PK	88.2	-40.8	2.32 V	182	32.6	14.8
4	#12930.00	35.6 AV	68.2	-32.6	2.32 V	182	20.8	14.8
5	19395.00	55.4 PK	74.0	-18.6	3.62 V	242	59.1	-3.7
6	19395.00	42.8 AV	54.0	-11.2	3.62 V	242	46.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	112.8 PK			1.00 H	225	105.9	6.9
2	*6545.00	99.8 AV			1.00 H	225	92.9	6.9
3	#13090.00	46.7 PK	88.2	-41.5	2.20 H	182	32.1	14.6
4	#13090.00	35.0 AV	68.2	-33.2	2.20 H	182	20.4	14.6
5	19635.00	53.5 PK	74.0	-20.5	1.44 H	334	57.5	-4.0
6	19635.00	38.1 AV	54.0	-15.9	1.44 H	334	42.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.5 PK			1.40 V	327	103.6	6.9
2	*6545.00	98.0 AV			1.40 V	327	91.1	6.9
3	#13090.00	47.2 PK	88.2	-41.0	2.26 V	180	32.6	14.6
4	#13090.00	35.4 AV	68.2	-32.8	2.26 V	180	20.8	14.6
5	19635.00	55.6 PK	74.0	-18.4	3.52 V	235	59.6	-4.0
6	19635.00	42.9 AV	54.0	-11.1	3.52 V	235	46.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	113.0 PK			1.02 H	210	106.3	6.7
2	*6625.00	99.4 AV			1.02 H	210	92.7	6.7
3	13250.00	48.0 PK	74.0	-26.0	2.24 H	193	33.0	15.0
4	13250.00	35.9 AV	54.0	-18.1	2.24 H	193	20.9	15.0
5	19875.00	53.4 PK	74.0	-20.6	1.49 H	319	56.9	-3.5
6	19875.00	38.1 AV	54.0	-15.9	1.49 H	319	41.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.5 PK			2.02 V	260	104.8	6.7
2	*6625.00	99.0 AV			2.02 V	260	92.3	6.7
3	13250.00	47.4 PK	74.0	-26.6	2.29 V	164	32.4	15.0
4	13250.00	35.4 AV	54.0	-18.6	2.29 V	164	20.4	15.0
5	19875.00	55.7 PK	74.0	-18.3	3.56 V	236	59.2	-3.5
6	19875.00	43.0 AV	54.0	-11.0	3.56 V	236	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	113.1 PK			1.02 H	220	106.1	7.0
2	*6705.00	99.5 AV			1.02 H	220	92.5	7.0
3	#13410.00	48.6 PK	88.2	-39.6	2.27 H	184	33.3	15.3
4	#13410.00	36.3 AV	68.2	-31.9	2.27 H	184	21.0	15.3
5	20115.00	54.2 PK	74.0	-19.8	1.39 H	342	57.7	-3.5
6	20115.00	38.5 AV	54.0	-15.5	1.39 H	342	42.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.7 PK			1.89 V	260	104.7	7.0
2	*6705.00	99.0 AV			1.89 V	260	92.0	7.0
3	#13410.00	48.4 PK	88.2	-39.8	2.25 V	187	33.1	15.3
4	#13410.00	36.3 AV	68.2	-31.9	2.25 V	187	21.0	15.3
5	20115.00	55.6 PK	74.0	-18.4	3.52 V	221	59.1	-3.5
6	20115.00	43.1 AV	54.0	-10.9	3.52 V	221	46.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.3 PK			1.01 H	220	105.2	7.1
2	*6785.00	99.6 AV			1.01 H	220	92.5	7.1
3	#13570.00	46.9 PK	88.2	-41.3	2.26 H	188	30.6	16.3
4	#13570.00	35.2 AV	68.2	-33.0	2.26 H	188	18.9	16.3
5	20355.00	53.6 PK	74.0	-20.4	1.43 H	330	56.7	-3.1
6	20355.00	38.3 AV	54.0	-15.7	1.43 H	330	41.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	111.1 PK			1.20 V	258	104.0	7.1
2	*6785.00	98.7 AV			1.20 V	258	91.6	7.1
3	#13570.00	48.3 PK	88.2	-39.9	2.24 V	186	32.0	16.3
4	#13570.00	36.3 AV	68.2	-31.9	2.24 V	186	20.0	16.3
5	20355.00	55.6 PK	74.0	-18.4	3.61 V	233	58.7	-3.1
6	20355.00	42.7 AV	54.0	-11.3	3.61 V	233	45.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	112.7 PK			1.00 H	222	105.6	7.1
2	*6865.00	99.0 AV			1.00 H	222	91.9	7.1
3	#13730.00	47.1 PK	88.2	-41.1	2.25 H	188	31.0	16.1
4	#13730.00	35.6 AV	68.2	-32.6	2.25 H	188	19.5	16.1
5	20595.00	53.4 PK	74.0	-20.6	1.38 H	330	56.7	-3.3
6	20595.00	38.2 AV	54.0	-15.8	1.38 H	330	41.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.3 PK			1.40 V	235	103.2	7.1
2	*6865.00	97.7 AV			1.40 V	235	90.6	7.1
3	#13730.00	47.7 PK	88.2	-40.5	2.22 V	182	31.6	16.1
4	#13730.00	35.5 AV	68.2	-32.7	2.22 V	182	19.4	16.1
5	20595.00	55.0 PK	74.0	-19.0	3.61 V	226	58.3	-3.3
6	20595.00	42.6 AV	54.0	-11.4	3.61 V	226	45.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	112.7 PK			1.00 H	220	105.2	7.5
2	*6945.00	99.2 AV			1.00 H	220	91.7	7.5
3	#13890.00	47.5 PK	88.2	-40.7	2.20 H	185	31.0	16.5
4	#13890.00	35.5 AV	68.2	-32.7	2.20 H	185	19.0	16.5
5	20835.00	53.1 PK	74.0	-20.9	1.46 H	324	56.0	-2.9
6	20835.00	37.8 AV	54.0	-16.2	1.46 H	324	40.7	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.7 PK			1.21 V	235	103.2	7.5
2	*6945.00	98.3 AV			1.21 V	235	90.8	7.5
3	#13890.00	47.5 PK	88.2	-40.7	2.21 V	170	31.0	16.5
4	#13890.00	35.7 AV	68.2	-32.5	2.21 V	170	19.2	16.5
5	20835.00	55.3 PK	74.0	-18.7	3.51 V	240	58.2	-2.9
6	20835.00	42.4 AV	54.0	-11.6	3.51 V	240	45.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	113.0 PK			1.00 H	225	104.7	8.3
2	*7025.00	100.2 AV			1.00 H	225	91.9	8.3
3	#7125.00	77.3 PK	88.2	-10.9	1.00 H	225	68.3	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.00 H	225	55.7	9.0
5	7250.00	56.7 PK	74.0	-17.3	1.00 H	225	47.4	9.3
6	7250.00	44.7 AV	54.0	-9.3	1.00 H	225	35.4	9.3
7	#14050.00	47.1 PK	88.2	-41.1	2.21 H	171	30.5	16.6
8	#14050.00	35.2 AV	68.2	-33.0	2.21 H	171	18.6	16.6
9	21075.00	53.9 PK	74.0	-20.1	1.39 H	331	56.1	-2.2
10	21075.00	38.6 AV	54.0	-15.4	1.39 H	331	40.8	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.5 PK			1.95 V	258	102.2	8.3
2	*7025.00	98.2 AV			1.95 V	258	89.9	8.3
3	#7125.00	73.2 PK	88.2	-15.0	1.95 V	258	64.2	9.0
4	#7125.00	61.9 AV	68.2	-6.3	1.95 V	258	52.9	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.95 V	258	46.8	9.3
6	7250.00	44.5 AV	54.0	-9.5	1.95 V	258	35.2	9.3
7	#14050.00	47.8 PK	88.2	-40.4	2.28 V	166	31.2	16.6
8	#14050.00	35.8 AV	68.2	-32.4	2.28 V	166	19.2	16.6
9	21075.00	39.1 PK	74.0	-34.9	1.10 V	291	41.3	-2.2
10	21075.00	27.0 AV	54.0	-27.0	1.10 V	291	29.2	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.03 H	237	71.4	4.4
2	#5925.00	64.7 AV	68.2	-3.5	1.03 H	237	60.3	4.4
3	*6025.00	104.8 PK			1.03 H	237	100.3	4.5
4	*6025.00	93.4 AV			1.03 H	237	88.9	4.5
5	12050.00	47.6 PK	74.0	-26.4	2.29 H	171	33.5	14.1
6	12050.00	35.5 AV	54.0	-18.5	2.29 H	171	21.4	14.1
7	18075.00	53.1 PK	74.0	-20.9	1.48 H	339	57.8	-4.7
8	18075.00	38.0 AV	54.0	-16.0	1.48 H	339	42.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	2.12 V	260	72.8	4.4
2	#5925.00	65.0 AV	68.2	-3.2	2.12 V	260	60.6	4.4
3	*6025.00	106.2 PK			2.12 V	260	101.7	4.5
4	*6025.00	93.8 AV			2.12 V	260	89.3	4.5
5	12050.00	48.5 PK	74.0	-25.5	2.28 V	189	34.4	14.1
6	12050.00	36.3 AV	54.0	-17.7	2.28 V	189	22.2	14.1
7	18075.00	55.7 PK	74.0	-18.3	3.46 V	150	60.4	-4.7
8	18075.00	43.1 AV	54.0	-10.9	3.46 V	150	47.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.7 PK			1.04 H	237	103.9	4.8
2	*6185.00	96.5 AV			1.04 H	237	91.7	4.8
3	12370.00	47.3 PK	74.0	-26.7	2.25 H	185	33.3	14.0
4	12370.00	35.2 AV	54.0	-18.8	2.25 H	185	21.2	14.0
5	18555.00	53.7 PK	74.0	-20.3	1.48 H	337	58.6	-4.9
6	18555.00	38.4 AV	54.0	-15.6	1.48 H	337	43.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.5 PK			2.10 V	260	104.7	4.8
2	*6185.00	96.8 AV			2.10 V	260	92.0	4.8
3	12370.00	47.8 PK	74.0	-26.2	2.28 V	176	33.8	14.0
4	12370.00	35.7 AV	54.0	-18.3	2.28 V	176	21.7	14.0
5	18555.00	43.1 PK	74.0	-30.9	3.18 V	235	48.0	-4.9
6	18555.00	37.9 AV	54.0	-16.1	3.18 V	235	42.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.7 PK			1.01 H	210	103.7	6.0
2	*6345.00	96.6 AV			1.01 H	210	90.6	6.0
3	12690.00	47.4 PK	74.0	-26.6	2.26 H	171	33.3	14.1
4	12690.00	35.7 AV	54.0	-18.3	2.26 H	171	21.6	14.1
5	19035.00	53.2 PK	74.0	-20.8	1.37 H	328	57.1	-3.9
6	19035.00	37.7 AV	54.0	-16.3	1.37 H	328	41.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.6 PK			1.99 V	258	104.6	6.0
2	*6345.00	96.9 AV			1.99 V	258	90.9	6.0
3	12690.00	48.2 PK	74.0	-25.8	2.21 V	169	34.1	14.1
4	12690.00	36.0 AV	54.0	-18.0	2.21 V	169	21.9	14.1
5	19035.00	55.5 PK	74.0	-18.5	3.60 V	213	59.4	-3.9
6	19035.00	43.0 AV	54.0	-11.0	3.60 V	213	46.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.5 PK			1.03 H	210	103.8	6.7
2	*6505.00	97.0 AV			1.03 H	210	90.3	6.7
3	#13010.00	47.4 PK	88.2	-40.8	2.22 H	183	32.8	14.6
4	#13010.00	35.5 AV	68.2	-32.7	2.22 H	183	20.9	14.6
5	19515.00	54.0 PK	74.0	-20.0	1.38 H	335	58.1	-4.1
6	19515.00	38.3 AV	54.0	-15.7	1.38 H	335	42.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.6 PK			1.30 V	305	100.9	6.7
2	*6505.00	95.4 AV			1.30 V	305	88.7	6.7
3	#13010.00	48.1 PK	88.2	-40.1	2.22 V	191	33.5	14.6
4	#13010.00	36.2 AV	68.2	-32.0	2.22 V	191	21.6	14.6
5	19515.00	55.9 PK	74.0	-18.1	3.51 V	232	60.0	-4.1
6	19515.00	43.0 AV	54.0	-11.0	3.51 V	232	47.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.6 PK			1.02 H	215	102.7	6.9
2	*6665.00	97.0 AV			1.02 H	215	90.1	6.9
3	13330.00	46.5 PK	74.0	-27.5	2.30 H	183	31.4	15.1
4	13330.00	34.9 AV	54.0	-19.1	2.30 H	183	19.8	15.1
5	19995.00	52.9 PK	74.0	-21.1	1.46 H	319	56.5	-3.6
6	19995.00	37.7 AV	54.0	-16.3	1.46 H	319	41.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.3 PK			1.90 V	260	102.4	6.9
2	*6665.00	96.3 AV			1.90 V	260	89.4	6.9
3	13330.00	48.6 PK	74.0	-25.4	2.22 V	186	33.5	15.1
4	13330.00	36.3 AV	54.0	-17.7	2.22 V	186	21.2	15.1
5	19995.00	56.3 PK	74.0	-17.7	3.56 V	241	59.9	-3.6
6	19995.00	43.4 AV	54.0	-10.6	3.56 V	241	47.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	109.0 PK			1.02 H	210	102.0	7.0
2	*6825.00	96.7 AV			1.02 H	210	89.7	7.0
3	#13650.00	46.6 PK	88.2	-41.6	2.26 H	185	30.2	16.4
4	#13650.00	35.1 AV	68.2	-33.1	2.26 H	185	18.7	16.4
5	20475.00	53.3 PK	74.0	-20.7	1.49 H	339	56.5	-3.2
6	20475.00	37.7 AV	54.0	-16.3	1.49 H	339	40.9	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	108.2 PK			2.00 V	260	101.2	7.0
2	*6825.00	96.2 AV			2.00 V	260	89.2	7.0
3	#13650.00	48.5 PK	88.2	-39.7	2.27 V	165	32.1	16.4
4	#13650.00	36.4 AV	68.2	-31.8	2.27 V	165	20.0	16.4
5	20475.00	55.8 PK	74.0	-18.2	3.61 V	242	59.0	-3.2
6	20475.00	43.0 AV	54.0	-11.0	3.61 V	242	46.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.4 PK			1.00 H	226	101.5	7.9
2	*6985.00	95.5 AV			1.00 H	226	87.6	7.9
3	#7125.00	77.1 PK	88.2	-11.1	1.00 H	226	68.1	9.0
4	#7125.00	64.8 AV	68.2	-3.4	1.00 H	226	55.8	9.0
5	7250.00	63.0 PK	74.0	-11.0	1.00 H	226	53.7	9.3
6	7250.00	50.0 AV	54.0	-4.0	1.00 H	226	40.7	9.3
7	#13970.00	47.2 PK	88.2	-41.0	2.22 H	198	30.5	16.7
8	#13970.00	35.2 AV	68.2	-33.0	2.22 H	198	18.5	16.7
9	20955.00	53.9 PK	74.0	-20.1	1.49 H	336	56.6	-2.7
10	20955.00	38.5 AV	54.0	-15.5	1.49 H	336	41.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.5 PK			1.97 V	258	98.6	7.9
2	*6985.00	94.3 AV			1.97 V	258	86.4	7.9
3	#7125.00	72.7 PK	88.2	-15.5	1.97 V	258	63.7	9.0
4	#7125.00	61.0 AV	68.2	-7.2	1.97 V	258	52.0	9.0
5	7250.00	60.4 PK	74.0	-13.6	1.97 V	258	51.1	9.3
6	7250.00	48.4 AV	54.0	-5.6	1.97 V	258	39.1	9.3
7	#13970.00	47.9 PK	88.2	-40.3	2.24 V	192	31.2	16.7
8	#13970.00	35.9 AV	68.2	-32.3	2.24 V	192	19.2	16.7
9	20955.00	55.1 PK	74.0	-18.9	3.54 V	217	57.8	-2.7
10	20955.00	42.5 AV	54.0	-11.5	3.54 V	217	45.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode A

2Tx NSS2 (RU, MRU)

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	1.00 H	56	72.8	4.4
2	#5925.00	54.8 AV	68.2	-13.4	1.00 H	56	50.4	4.4
3	*5955.00	123.4 PK			1.00 H	56	118.9	4.5
4	*5955.00	113.1 AV			1.00 H	56	108.6	4.5
5	11910.00	50.8 PK	74.0	-23.2	2.49 H	9	37.1	13.7
6	11910.00	38.5 AV	54.0	-15.5	2.49 H	9	24.8	13.7
7	17865.00	67.7 PK	74.0	-6.3	3.84 H	279	43.4	24.3
8	17865.00	32.1 AV	54.0	-21.9	3.84 H	279	7.8	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.9 PK	88.2	-10.3	1.20 V	90	73.5	4.4
2	#5925.00	54.7 AV	68.2	-13.5	1.20 V	90	50.3	4.4
3	*5955.00	125.0 PK			1.20 V	90	120.5	4.5
4	*5955.00	113.6 AV			1.20 V	90	109.1	4.5
5	11910.00	50.3 PK	74.0	-23.7	2.50 V	5	36.6	13.7
6	11910.00	38.2 AV	54.0	-15.8	2.50 V	5	24.5	13.7
7	17865.00	42.7 PK	74.0	-31.3	3.12 V	68	18.4	24.3
8	17865.00	32.1 AV	54.0	-21.9	3.12 V	68	7.8	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	125.9 PK			1.00 H	234	121.1	4.8
2	*6195.00	114.3 AV			1.00 H	234	109.5	4.8
3	12390.00	50.1 PK	74.0	-23.9	2.54 H	14	36.2	13.9
4	12390.00	38.2 AV	54.0	-15.8	2.54 H	14	24.3	13.9
5	18585.00	67.1 PK	74.0	-6.9	3.84 H	270	72.1	-5.0
6	18585.00	31.6 AV	54.0	-22.4	3.84 H	270	36.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.2 PK			1.11 V	261	116.4	4.8
2	*6195.00	112.8 AV			1.11 V	261	108.0	4.8
3	12390.00	50.6 PK	74.0	-23.4	2.47 V	14	36.7	13.9
4	12390.00	38.6 AV	54.0	-15.4	2.47 V	14	24.7	13.9
5	18585.00	43.3 PK	74.0	-30.7	3.18 V	71	48.3	-5.0
6	18585.00	32.5 AV	54.0	-21.5	3.18 V	71	37.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	125.5 PK			1.03 H	239	119.3	6.2
2	*6415.00	114.1 AV			1.03 H	239	107.9	6.2
3	#12830.00	50.4 PK	88.2	-37.8	2.44 H	13	35.9	14.5
4	#12830.00	38.0 AV	68.2	-30.2	2.44 H	13	23.5	14.5
5	19245.00	67.7 PK	74.0	-6.3	3.85 H	273	71.5	-3.8
6	19245.00	32.4 AV	54.0	-21.6	3.85 H	273	36.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.3 PK			1.13 V	266	115.1	6.2
2	*6415.00	112.7 AV			1.13 V	266	106.5	6.2
3	#12830.00	50.4 PK	88.2	-37.8	2.54 V	15	35.9	14.5
4	#12830.00	38.5 AV	68.2	-29.7	2.54 V	15	24.0	14.5
5	19245.00	42.8 PK	74.0	-31.2	3.07 V	77	46.6	-3.8
6	19245.00	32.4 AV	54.0	-21.6	3.07 V	77	36.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	126.2 PK			1.00 H	222	120.0	6.2
2	*6435.00	114.7 AV			1.00 H	222	108.5	6.2
3	#12870.00	50.8 PK	88.2	-37.4	2.52 H	0	36.1	14.7
4	#12870.00	38.6 AV	68.2	-29.6	2.52 H	0	23.9	14.7
5	19305.00	68.0 PK	74.0	-6.0	3.83 H	271	71.7	-3.7
6	19305.00	32.5 AV	54.0	-21.5	3.83 H	271	36.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.2 PK			1.17 V	269	115.0	6.2
2	*6435.00	113.0 AV			1.17 V	269	106.8	6.2
3	#12870.00	50.0 PK	88.2	-38.2	2.54 V	0	35.3	14.7
4	#12870.00	38.1 AV	68.2	-30.1	2.54 V	0	23.4	14.7
5	19305.00	42.7 PK	74.0	-31.3	3.18 V	81	46.4	-3.7
6	19305.00	32.1 AV	54.0	-21.9	3.18 V	81	35.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	125.6 PK			1.00 H	249	119.2	6.4
2	*6475.00	114.0 AV			1.00 H	249	107.6	6.4
3	#12950.00	50.8 PK	88.2	-37.4	2.52 H	15	36.1	14.7
4	#12950.00	38.4 AV	68.2	-29.8	2.52 H	15	23.7	14.7
5	19425.00	67.7 PK	74.0	-6.3	3.84 H	288	71.5	-3.8
6	19425.00	32.4 AV	54.0	-21.6	3.84 H	288	36.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.0 PK			1.07 V	259	114.6	6.4
2	*6475.00	112.6 AV			1.07 V	259	106.2	6.4
3	#12950.00	50.2 PK	88.2	-38.0	2.48 V	18	35.5	14.7
4	#12950.00	38.3 AV	68.2	-29.9	2.48 V	18	23.6	14.7
5	19425.00	42.3 PK	74.0	-31.7	3.15 V	59	46.1	-3.8
6	19425.00	31.9 AV	54.0	-22.1	3.15 V	59	35.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	126.0 PK			1.01 H	222	119.3	6.7
2	*6515.00	114.5 AV			1.01 H	222	107.8	6.7
3	#13030.00	50.5 PK	88.2	-37.7	2.48 H	17	35.9	14.6
4	#13030.00	38.3 AV	68.2	-29.9	2.48 H	17	23.7	14.6
5	19545.00	67.4 PK	74.0	-6.6	3.82 H	291	71.5	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.82 H	291	35.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	121.6 PK			1.10 V	270	114.9	6.7
2	*6515.00	113.1 AV			1.10 V	270	106.4	6.7
3	#13030.00	50.2 PK	88.2	-38.0	2.50 V	12	35.6	14.6
4	#13030.00	38.3 AV	68.2	-29.9	2.50 V	12	23.7	14.6
5	19545.00	42.2 PK	74.0	-31.8	3.11 V	64	46.3	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.11 V	64	35.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	125.1 PK			1.00 H	229	118.3	6.8
2	*6535.00	113.8 AV			1.00 H	229	107.0	6.8
3	#13070.00	50.8 PK	88.2	-37.4	2.53 H	0	36.1	14.7
4	#13070.00	38.5 AV	68.2	-29.7	2.53 H	0	23.8	14.7
5	19605.00	67.8 PK	74.0	-6.2	3.80 H	291	71.8	-4.0
6	19605.00	32.2 AV	54.0	-21.8	3.80 H	291	36.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.3 PK			1.13 V	258	114.5	6.8
2	*6535.00	112.7 AV			1.13 V	258	105.9	6.8
3	#13070.00	50.2 PK	88.2	-38.0	2.45 V	18	35.5	14.7
4	#13070.00	38.3 AV	68.2	-29.9	2.45 V	18	23.6	14.7
5	19605.00	42.5 PK	74.0	-31.5	3.12 V	55	46.5	-4.0
6	19605.00	31.6 AV	54.0	-22.4	3.12 V	55	35.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	125.5 PK			1.00 H	245	118.5	7.0
2	*6695.00	114.0 AV			1.00 H	245	107.0	7.0
3	13390.00	50.9 PK	74.0	-23.1	2.54 H	0	35.6	15.3
4	13390.00	38.6 AV	54.0	-15.4	2.54 H	0	23.3	15.3
5	20085.00	68.3 PK	74.0	-5.7	3.87 H	282	71.8	-3.5
6	20085.00	32.5 AV	54.0	-21.5	3.87 H	282	36.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.10 V	264	114.1	7.0
2	*6695.00	112.5 AV			1.10 V	264	105.5	7.0
3	13390.00	50.0 PK	74.0	-24.0	2.53 V	0	34.7	15.3
4	13390.00	37.7 AV	54.0	-16.3	2.53 V	0	22.4	15.3
5	20085.00	42.2 PK	74.0	-31.8	3.07 V	62	45.7	-3.5
6	20085.00	31.6 AV	54.0	-22.4	3.07 V	62	35.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	125.3 PK			1.05 H	244	118.3	7.0
2	*6855.00	114.0 AV			1.05 H	244	107.0	7.0
3	#13710.00	51.0 PK	88.2	-37.2	2.44 H	8	34.7	16.3
4	#13710.00	38.6 AV	68.2	-29.6	2.44 H	8	22.3	16.3
5	20565.00	67.2 PK	74.0	-6.8	3.90 H	276	70.5	-3.3
6	20565.00	31.9 AV	54.0	-22.1	3.90 H	276	35.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.89 V	261	111.8	7.0
2	*6855.00	112.9 AV			1.89 V	261	105.9	7.0
3	#13710.00	50.5 PK	88.2	-37.7	2.48 V	9	34.2	16.3
4	#13710.00	38.2 AV	68.2	-30.0	2.48 V	9	21.9	16.3
5	20565.00	42.6 PK	74.0	-31.4	3.15 V	54	45.9	-3.3
6	20565.00	32.3 AV	54.0	-21.7	3.15 V	54	35.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	125.5 PK			1.03 H	245	118.4	7.1
2	*6875.00	113.8 AV			1.03 H	245	106.7	7.1
3	#13750.00	50.9 PK	88.2	-37.3	2.50 H	12	34.8	16.1
4	#13750.00	38.8 AV	68.2	-29.4	2.50 H	12	22.7	16.1
5	20625.00	67.1 PK	74.0	-6.9	3.80 H	286	70.4	-3.3
6	20625.00	31.7 AV	54.0	-22.3	3.80 H	286	35.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.0 PK			1.95 V	255	111.9	7.1
2	*6875.00	113.2 AV			1.95 V	255	106.1	7.1
3	#13750.00	50.1 PK	88.2	-38.1	2.50 V	18	34.0	16.1
4	#13750.00	38.2 AV	68.2	-30.0	2.50 V	18	22.1	16.1
5	20625.00	43.1 PK	74.0	-30.9	3.06 V	77	46.4	-3.3
6	20625.00	32.4 AV	54.0	-21.6	3.06 V	77	35.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	126.5 PK			1.05 H	243	118.6	7.9
2	*6995.00	114.7 AV			1.05 H	243	106.8	7.9
3	#13990.00	50.3 PK	88.2	-37.9	2.53 H	21	33.6	16.7
4	#13990.00	38.0 AV	68.2	-30.2	2.53 H	21	21.3	16.7
5	20985.00	67.8 PK	74.0	-6.2	3.80 H	277	70.6	-2.8
6	20985.00	32.1 AV	54.0	-21.9	3.80 H	277	34.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.9 PK			1.91 V	259	111.0	7.9
2	*6995.00	112.9 AV			1.91 V	259	105.0	7.9
3	#13990.00	50.5 PK	88.2	-37.7	2.56 V	9	33.8	16.7
4	#13990.00	38.4 AV	68.2	-29.8	2.56 V	9	21.7	16.7
5	20985.00	42.9 PK	74.0	-31.1	3.11 V	78	45.7	-2.8
6	20985.00	32.3 AV	54.0	-21.7	3.11 V	78	35.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.0 PK			1.00 H	212	91.0	9.0
2	*7115.00	92.3 AV			1.00 H	212	83.3	9.0
3	#7125.00	86.4 PK	88.2	-1.8	1.00 H	212	77.4	9.0
4	#7125.00	60.7 AV	68.2	-7.5	1.00 H	212	51.7	9.0
5	7250.00	55.3 PK	74.0	-18.7	1.00 H	212	46.0	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.00 H	212	34.4	9.3
7	#14230.00	50.5 PK	88.2	-37.7	2.49 H	0	33.6	16.9
8	#14230.00	38.1 AV	68.2	-30.1	2.49 H	0	21.2	16.9
9	21345.00	67.9 PK	74.0	-6.1	3.89 H	283	69.5	-1.6
10	21345.00	32.5 AV	54.0	-21.5	3.89 H	283	34.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			2.00 V	263	91.4	9.0
2	*7115.00	91.5 AV			2.00 V	263	82.5	9.0
3	#7125.00	83.1 PK	88.2	-5.1	2.00 V	263	74.1	9.0
4	#7125.00	58.1 AV	68.2	-10.1	2.00 V	263	49.1	9.0
5	7250.00	55.1 PK	74.0	-18.9	2.00 V	263	45.8	9.3
6	7250.00	43.7 AV	54.0	-10.3	2.00 V	263	34.4	9.3
7	#14230.00	50.0 PK	88.2	-38.2	2.56 V	9	33.1	16.9
8	#14230.00	38.2 AV	68.2	-30.0	2.56 V	9	21.3	16.9
9	21345.00	43.1 PK	74.0	-30.9	3.11 V	61	44.7	-1.6
10	21345.00	32.2 AV	54.0	-21.8	3.11 V	61	33.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.2 PK	88.2	-14.0	1.00 H	47	69.8	4.4
2	#5925.00	55.6 AV	68.2	-12.6	1.00 H	47	51.2	4.4
3	*5955.00	121.5 PK			1.00 H	47	117.0	4.5
4	*5955.00	111.1 AV			1.00 H	47	106.6	4.5
5	11910.00	50.5 PK	74.0	-23.5	2.49 H	1	36.8	13.7
6	11910.00	38.2 AV	54.0	-15.8	2.49 H	1	24.5	13.7
7	17865.00	67.5 PK	74.0	-6.5	3.86 H	272	43.2	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.86 H	272	7.6	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.19 V	281	73.8	4.4
2	#5925.00	56.7 AV	68.2	-11.5	1.19 V	281	52.3	4.4
3	*5955.00	121.8 PK			1.19 V	281	117.3	4.5
4	*5955.00	111.7 AV			1.19 V	281	107.2	4.5
5	11910.00	49.8 PK	74.0	-24.2	2.45 V	2	36.1	13.7
6	11910.00	37.8 AV	54.0	-16.2	2.45 V	2	24.1	13.7
7	17865.00	42.3 PK	74.0	-31.7	3.14 V	76	18.0	24.3
8	17865.00	31.7 AV	54.0	-22.3	3.14 V	76	7.4	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.3 PK			1.02 H	233	116.5	4.8
2	*6195.00	111.6 AV			1.02 H	233	106.8	4.8
3	12390.00	50.6 PK	74.0	-23.4	2.51 H	0	36.7	13.9
4	12390.00	38.1 AV	54.0	-15.9	2.51 H	0	24.2	13.9
5	18585.00	68.4 PK	74.0	-5.6	3.88 H	279	73.4	-5.0
6	18585.00	32.5 AV	54.0	-21.5	3.88 H	279	37.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.2 PK			1.14 V	278	116.4	4.8
2	*6195.00	111.4 AV			1.14 V	278	106.6	4.8
3	12390.00	49.9 PK	74.0	-24.1	2.54 V	18	36.0	13.9
4	12390.00	38.0 AV	54.0	-16.0	2.54 V	18	24.1	13.9
5	18585.00	42.5 PK	74.0	-31.5	3.16 V	73	47.5	-5.0
6	18585.00	32.2 AV	54.0	-21.8	3.16 V	73	37.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			1.05 H	244	114.6	6.2
2	*6415.00	111.2 AV			1.05 H	244	105.0	6.2
3	#12830.00	50.7 PK	88.2	-37.5	2.52 H	2	36.2	14.5
4	#12830.00	38.3 AV	68.2	-29.9	2.52 H	2	23.8	14.5
5	19245.00	67.9 PK	74.0	-6.1	3.81 H	294	71.7	-3.8
6	19245.00	32.4 AV	54.0	-21.6	3.81 H	294	36.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.4 PK			1.20 V	279	116.2	6.2
2	*6415.00	112.1 AV			1.20 V	279	105.9	6.2
3	#12830.00	50.6 PK	88.2	-37.6	2.48 V	0	36.1	14.5
4	#12830.00	38.4 AV	68.2	-29.8	2.48 V	0	23.9	14.5
5	19245.00	42.9 PK	74.0	-31.1	3.17 V	72	46.7	-3.8
6	19245.00	32.5 AV	54.0	-21.5	3.17 V	72	36.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.0 PK			1.02 H	242	114.8	6.2
2	*6435.00	111.4 AV			1.02 H	242	105.2	6.2
3	#12870.00	51.2 PK	88.2	-37.0	2.49 H	7	36.5	14.7
4	#12870.00	39.0 AV	68.2	-29.2	2.49 H	7	24.3	14.7
5	19305.00	67.7 PK	74.0	-6.3	3.83 H	287	71.4	-3.7
6	19305.00	32.2 AV	54.0	-21.8	3.83 H	287	35.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.1 PK			1.21 V	266	114.9	6.2
2	*6435.00	111.2 AV			1.21 V	266	105.0	6.2
3	#12870.00	50.4 PK	88.2	-37.8	2.53 V	12	35.7	14.7
4	#12870.00	38.1 AV	68.2	-30.1	2.53 V	12	23.4	14.7
5	19305.00	42.2 PK	74.0	-31.8	3.17 V	71	45.9	-3.7
6	19305.00	31.6 AV	54.0	-22.4	3.17 V	71	35.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.1 PK			1.00 H	240	115.7	6.4
2	*6475.00	112.1 AV			1.00 H	240	105.7	6.4
3	#12950.00	51.3 PK	88.2	-36.9	2.43 H	20	36.6	14.7
4	#12950.00	38.8 AV	68.2	-29.4	2.43 H	20	24.1	14.7
5	19425.00	67.3 PK	74.0	-6.7	3.87 H	284	71.1	-3.8
6	19425.00	32.0 AV	54.0	-22.0	3.87 H	284	35.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.0 PK			1.22 V	278	114.6	6.4
2	*6475.00	111.2 AV			1.22 V	278	104.8	6.4
3	#12950.00	49.9 PK	88.2	-38.3	2.55 V	0	35.2	14.7
4	#12950.00	37.8 AV	68.2	-30.4	2.55 V	0	23.1	14.7
5	19425.00	42.9 PK	74.0	-31.1	3.08 V	81	46.7	-3.8
6	19425.00	32.3 AV	54.0	-21.7	3.08 V	81	36.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.8 PK			1.03 H	224	114.1	6.7
2	*6515.00	111.2 AV			1.03 H	224	104.5	6.7
3	#13030.00	51.5 PK	88.2	-36.7	2.54 H	19	36.9	14.6
4	#13030.00	39.0 AV	68.2	-29.2	2.54 H	19	24.4	14.6
5	19545.00	68.1 PK	74.0	-5.9	3.89 H	286	72.2	-4.1
6	19545.00	32.4 AV	54.0	-21.6	3.89 H	286	36.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	122.3 PK			1.18 V	268	115.6	6.7
2	*6515.00	112.0 AV			1.18 V	268	105.3	6.7
3	#13030.00	50.7 PK	88.2	-37.5	2.53 V	0	36.1	14.6
4	#13030.00	38.3 AV	68.2	-29.9	2.53 V	0	23.7	14.6
5	19545.00	42.6 PK	74.0	-31.4	3.17 V	64	46.7	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.17 V	64	35.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.01 H	227	114.8	6.8
2	*6535.00	111.8 AV			1.01 H	227	105.0	6.8
3	#13070.00	51.2 PK	88.2	-37.0	2.51 H	0	36.5	14.7
4	#13070.00	38.9 AV	68.2	-29.3	2.51 H	0	24.2	14.7
5	19605.00	67.4 PK	74.0	-6.6	3.80 H	264	71.4	-4.0
6	19605.00	32.0 AV	54.0	-22.0	3.80 H	264	36.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.8 PK			1.25 V	293	115.0	6.8
2	*6535.00	112.0 AV			1.25 V	293	105.2	6.8
3	#13070.00	50.5 PK	88.2	-37.7	2.56 V	1	35.8	14.7
4	#13070.00	38.3 AV	68.2	-29.9	2.56 V	1	23.6	14.7
5	19605.00	43.0 PK	74.0	-31.0	3.07 V	71	47.0	-4.0
6	19605.00	32.5 AV	54.0	-21.5	3.07 V	71	36.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.5 PK			1.03 H	247	114.5	7.0
2	*6695.00	111.6 AV			1.03 H	247	104.6	7.0
3	13390.00	51.3 PK	74.0	-22.7	2.49 H	25	36.0	15.3
4	13390.00	38.8 AV	54.0	-15.2	2.49 H	25	23.5	15.3
5	20085.00	67.8 PK	74.0	-6.2	3.82 H	278	71.3	-3.5
6	20085.00	32.3 AV	54.0	-21.7	3.82 H	278	35.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			1.21 V	274	115.3	7.0
2	*6695.00	112.2 AV			1.21 V	274	105.2	7.0
3	13390.00	50.1 PK	74.0	-23.9	2.47 V	1	34.8	15.3
4	13390.00	38.3 AV	54.0	-15.7	2.47 V	1	23.0	15.3
5	20085.00	42.6 PK	74.0	-31.4	3.12 V	62	46.1	-3.5
6	20085.00	31.8 AV	54.0	-22.2	3.12 V	62	35.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			1.00 H	220	113.7	7.0
2	*6855.00	111.1 AV			1.00 H	220	104.1	7.0
3	#13710.00	51.0 PK	88.2	-37.2	2.44 H	15	34.7	16.3
4	#13710.00	38.8 AV	68.2	-29.4	2.44 H	15	22.5	16.3
5	20565.00	67.9 PK	74.0	-6.1	3.79 H	279	71.2	-3.3
6	20565.00	32.3 AV	54.0	-21.7	3.79 H	279	35.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.5 PK			1.14 V	271	115.5	7.0
2	*6855.00	112.2 AV			1.14 V	271	105.2	7.0
3	#13710.00	50.8 PK	88.2	-37.4	2.52 V	1	34.5	16.3
4	#13710.00	38.6 AV	68.2	-29.6	2.52 V	1	22.3	16.3
5	20565.00	42.5 PK	74.0	-31.5	3.10 V	65	45.8	-3.3
6	20565.00	31.8 AV	54.0	-22.2	3.10 V	65	35.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.0 PK			1.00 H	225	113.9	7.1
2	*6875.00	111.3 AV			1.00 H	225	104.2	7.1
3	#13750.00	50.5 PK	88.2	-37.7	2.55 H	24	34.4	16.1
4	#13750.00	38.1 AV	68.2	-30.1	2.55 H	24	22.0	16.1
5	20625.00	67.9 PK	74.0	-6.1	3.85 H	293	71.2	-3.3
6	20625.00	32.0 AV	54.0	-22.0	3.85 H	293	35.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.5 PK			1.17 V	266	114.4	7.1
2	*6875.00	111.5 AV			1.17 V	266	104.4	7.1
3	#13750.00	49.7 PK	88.2	-38.5	2.55 V	0	33.6	16.1
4	#13750.00	37.9 AV	68.2	-30.3	2.55 V	0	21.8	16.1
5	20625.00	42.8 PK	74.0	-31.2	3.18 V	82	46.1	-3.3
6	20625.00	31.9 AV	54.0	-22.1	3.18 V	82	35.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.7 PK			1.06 H	233	113.8	7.9
2	*6995.00	112.1 AV			1.06 H	233	104.2	7.9
3	#13990.00	50.6 PK	88.2	-37.6	2.50 H	0	33.9	16.7
4	#13990.00	38.4 AV	68.2	-29.8	2.50 H	0	21.7	16.7
5	20985.00	67.6 PK	74.0	-6.4	3.89 H	285	70.4	-2.8
6	20985.00	31.9 AV	54.0	-22.1	3.89 H	285	34.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.6 PK			1.19 V	286	113.7	7.9
2	*6995.00	111.7 AV			1.19 V	286	103.8	7.9
3	#13990.00	50.7 PK	88.2	-37.5	2.51 V	4	34.0	16.7
4	#13990.00	38.6 AV	68.2	-29.6	2.51 V	4	21.9	16.7
5	20985.00	42.4 PK	74.0	-31.6	3.09 V	57	45.2	-2.8
6	20985.00	31.9 AV	54.0	-22.1	3.09 V	57	34.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.6 PK			1.00 H	230	94.6	9.0
2	*7115.00	94.8 AV			1.00 H	230	85.8	9.0
3	#7125.00	86.5 PK	88.2	-1.7	1.00 H	230	77.5	9.0
4	#7125.00	60.5 AV	68.2	-7.7	1.00 H	230	51.5	9.0
5	7250.00	55.2 PK	74.0	-18.8	1.00 H	230	45.9	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.00 H	230	34.5	9.3
7	#14230.00	50.1 PK	88.2	-38.1	2.43 H	7	33.2	16.9
8	#14230.00	38.0 AV	68.2	-30.2	2.43 H	7	21.1	16.9
9	21345.00	68.0 PK	74.0	-6.0	3.87 H	284	69.6	-1.6
10	21345.00	32.2 AV	54.0	-21.8	3.87 H	284	33.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.5 PK			1.18 V	238	92.5	9.0
2	*7115.00	93.4 AV			1.18 V	238	84.4	9.0
3	#7125.00	83.1 PK	88.2	-5.1	1.18 V	238	74.1	9.0
4	#7125.00	59.7 AV	68.2	-8.5	1.18 V	238	50.7	9.0
5	7250.00	54.8 PK	74.0	-19.2	1.18 V	238	45.5	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.18 V	238	34.4	9.3
7	#14230.00	50.9 PK	88.2	-37.3	2.52 V	15	34.0	16.9
8	#14230.00	38.5 AV	68.2	-29.7	2.52 V	15	21.6	16.9
9	21345.00	42.5 PK	74.0	-31.5	3.12 V	68	44.1	-1.6
10	21345.00	31.9 AV	54.0	-22.1	3.12 V	68	33.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.1 PK	88.2	-11.1	1.00 H	58	72.7	4.4
2	#5925.00	56.0 AV	68.2	-12.2	1.00 H	58	51.6	4.4
3	*5955.00	120.0 PK			1.00 H	58	115.5	4.5
4	*5955.00	108.8 AV			1.00 H	58	104.3	4.5
5	11910.00	50.5 PK	74.0	-23.5	2.46 H	0	36.8	13.7
6	11910.00	38.3 AV	54.0	-15.7	2.46 H	0	24.6	13.7
7	17865.00	68.2 PK	74.0	-5.8	3.86 H	290	43.9	24.3
8	17865.00	32.6 AV	54.0	-21.4	3.86 H	290	8.3	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.2 PK	88.2	-17.0	1.90 V	251	66.8	4.4
2	#5925.00	54.6 AV	68.2	-13.6	1.90 V	251	50.2	4.4
3	*5955.00	119.9 PK			1.90 V	251	115.4	4.5
4	*5955.00	108.7 AV			1.90 V	251	104.2	4.5
5	11910.00	50.2 PK	74.0	-23.8	2.50 V	14	36.5	13.7
6	11910.00	38.1 AV	54.0	-15.9	2.50 V	14	24.4	13.7
7	17865.00	68.1 PK	74.0	-5.9	3.85 V	278	43.8	24.3
8	17865.00	32.4 AV	54.0	-21.6	3.85 V	278	8.1	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.0 PK			1.02 H	71	115.2	4.8
2	*6195.00	108.8 AV			1.02 H	71	104.0	4.8
3	12390.00	50.7 PK	74.0	-23.3	2.49 H	3	36.8	13.9
4	12390.00	38.3 AV	54.0	-15.7	2.49 H	3	24.4	13.9
5	18585.00	67.7 PK	74.0	-6.3	3.83 H	283	72.7	-5.0
6	18585.00	32.2 AV	54.0	-21.8	3.83 H	283	37.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.2 PK			1.89 V	264	115.4	4.8
2	*6195.00	108.9 AV			1.89 V	264	104.1	4.8
3	12390.00	49.8 PK	74.0	-24.2	2.46 V	11	35.9	13.9
4	12390.00	38.0 AV	54.0	-16.0	2.46 V	11	24.1	13.9
5	18585.00	58.3 PK	74.0	-15.7	2.16 V	281	63.3	-5.0
6	18585.00	42.0 AV	54.0	-12.0	2.16 V	281	47.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			1.00 H	51	114.1	6.2
2	*6415.00	108.9 AV			1.00 H	51	102.7	6.2
3	#12830.00	51.1 PK	88.2	-37.1	2.51 H	7	36.6	14.5
4	#12830.00	38.5 AV	68.2	-29.7	2.51 H	7	24.0	14.5
5	19245.00	67.5 PK	74.0	-6.5	3.82 H	290	71.3	-3.8
6	19245.00	32.1 AV	54.0	-21.9	3.82 H	290	35.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			1.93 V	258	114.0	6.2
2	*6415.00	108.8 AV			1.93 V	258	102.6	6.2
3	#12830.00	50.6 PK	88.2	-37.6	2.51 V	0	36.1	14.5
4	#12830.00	38.5 AV	68.2	-29.7	2.51 V	0	24.0	14.5
5	19245.00	58.1 PK	74.0	-15.9	2.18 V	277	61.9	-3.8
6	19245.00	42.0 AV	54.0	-12.0	2.18 V	277	45.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.9 PK			1.03 H	74	113.7	6.2
2	*6435.00	108.9 AV			1.03 H	74	102.7	6.2
3	#12870.00	51.3 PK	88.2	-36.9	2.51 H	17	36.6	14.7
4	#12870.00	38.7 AV	68.2	-29.5	2.51 H	17	24.0	14.7
5	19305.00	68.2 PK	74.0	-5.8	3.84 H	285	71.9	-3.7
6	19305.00	32.5 AV	54.0	-21.5	3.84 H	285	36.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.7 PK			1.96 V	251	113.5	6.2
2	*6435.00	108.4 AV			1.96 V	251	102.2	6.2
3	#12870.00	50.0 PK	88.2	-38.2	2.56 V	9	35.3	14.7
4	#12870.00	38.0 AV	68.2	-30.2	2.56 V	9	23.3	14.7
5	19305.00	57.7 PK	74.0	-16.3	2.15 V	270	61.4	-3.7
6	19305.00	41.7 AV	54.0	-12.3	2.15 V	270	45.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.8 PK			1.00 H	72	113.4	6.4
2	*6475.00	108.9 AV			1.00 H	72	102.5	6.4
3	#12950.00	50.4 PK	88.2	-37.8	2.47 H	5	35.7	14.7
4	#12950.00	38.4 AV	68.2	-29.8	2.47 H	5	23.7	14.7
5	19425.00	67.0 PK	74.0	-7.0	3.89 H	289	70.8	-3.8
6	19425.00	31.7 AV	54.0	-22.3	3.89 H	289	35.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.7 PK			1.95 V	238	113.3	6.4
2	*6475.00	108.7 AV			1.95 V	238	102.3	6.4
3	#12950.00	49.8 PK	88.2	-38.4	2.50 V	15	35.1	14.7
4	#12950.00	37.9 AV	68.2	-30.3	2.50 V	15	23.2	14.7
5	19425.00	58.7 PK	74.0	-15.3	2.21 V	270	62.5	-3.8
6	19425.00	42.1 AV	54.0	-11.9	2.21 V	270	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	119.6 PK			1.00 H	51	112.9	6.7
2	*6515.00	108.5 AV			1.00 H	51	101.8	6.7
3	#13030.00	50.9 PK	88.2	-37.3	2.43 H	0	36.3	14.6
4	#13030.00	38.6 AV	68.2	-29.6	2.43 H	0	24.0	14.6
5	19545.00	67.4 PK	74.0	-6.6	3.87 H	294	71.5	-4.1
6	19545.00	32.0 AV	54.0	-22.0	3.87 H	294	36.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.5 PK			1.96 V	240	113.8	6.7
2	*6515.00	109.0 AV			1.96 V	240	102.3	6.7
3	#13030.00	50.1 PK	88.2	-38.1	2.45 V	0	35.5	14.6
4	#13030.00	38.1 AV	68.2	-30.1	2.45 V	0	23.5	14.6
5	19545.00	58.4 PK	74.0	-15.6	2.21 V	294	62.5	-4.1
6	19545.00	42.2 AV	54.0	-11.8	2.21 V	294	46.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.3 PK			1.05 H	45	113.5	6.8
2	*6535.00	109.1 AV			1.05 H	45	102.3	6.8
3	#13070.00	50.9 PK	88.2	-37.3	2.44 H	3	36.2	14.7
4	#13070.00	38.4 AV	68.2	-29.8	2.44 H	3	23.7	14.7
5	19605.00	68.3 PK	74.0	-5.7	3.86 H	287	72.3	-4.0
6	19605.00	32.5 AV	54.0	-21.5	3.86 H	287	36.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.3 PK			1.90 V	248	113.5	6.8
2	*6535.00	108.8 AV			1.90 V	248	102.0	6.8
3	#13070.00	51.0 PK	88.2	-37.2	2.48 V	3	36.3	14.7
4	#13070.00	38.6 AV	68.2	-29.6	2.48 V	3	23.9	14.7
5	19605.00	58.7 PK	74.0	-15.3	2.20 V	294	62.7	-4.0
6	19605.00	42.2 AV	54.0	-11.8	2.20 V	294	46.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.3 PK			1.05 H	46	113.3	7.0
2	*6695.00	109.1 AV			1.05 H	46	102.1	7.0
3	13390.00	50.6 PK	74.0	-23.4	2.43 H	9	35.3	15.3
4	13390.00	38.2 AV	54.0	-15.8	2.43 H	9	22.9	15.3
5	20085.00	67.7 PK	74.0	-6.3	3.82 H	275	71.2	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.82 H	275	35.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			1.93 V	252	112.8	7.0
2	*6695.00	108.3 AV			1.93 V	252	101.3	7.0
3	13390.00	50.4 PK	74.0	-23.6	2.52 V	18	35.1	15.3
4	13390.00	38.1 AV	54.0	-15.9	2.52 V	18	22.8	15.3
5	20085.00	58.1 PK	74.0	-15.9	2.22 V	270	61.6	-3.5
6	20085.00	41.8 AV	54.0	-12.2	2.22 V	270	45.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.6 PK			1.02 H	49	113.6	7.0
2	*6855.00	109.3 AV			1.02 H	49	102.3	7.0
3	#13710.00	50.9 PK	88.2	-37.3	2.50 H	3	34.6	16.3
4	#13710.00	38.7 AV	68.2	-29.5	2.50 H	3	22.4	16.3
5	20565.00	68.0 PK	74.0	-6.0	3.89 H	277	71.3	-3.3
6	20565.00	32.1 AV	54.0	-21.9	3.89 H	277	35.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.4 PK			1.88 V	245	113.4	7.0
2	*6855.00	109.1 AV			1.88 V	245	102.1	7.0
3	#13710.00	51.0 PK	88.2	-37.2	2.48 V	14	34.7	16.3
4	#13710.00	38.7 AV	68.2	-29.5	2.48 V	14	22.4	16.3
5	20565.00	58.9 PK	74.0	-15.1	2.18 V	280	62.2	-3.3
6	20565.00	42.4 AV	54.0	-11.6	2.18 V	280	45.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.5 PK			1.04 H	64	113.4	7.1
2	*6875.00	109.1 AV			1.04 H	64	102.0	7.1
3	#13750.00	50.7 PK	88.2	-37.5	2.45 H	7	34.6	16.1
4	#13750.00	38.4 AV	68.2	-29.8	2.45 H	7	22.3	16.1
5	20625.00	68.0 PK	74.0	-6.0	3.85 H	265	71.3	-3.3
6	20625.00	32.5 AV	54.0	-21.5	3.85 H	265	35.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.9 PK			1.87 V	265	112.8	7.1
2	*6875.00	109.0 AV			1.87 V	265	101.9	7.1
3	#13750.00	50.6 PK	88.2	-37.6	2.50 V	17	34.5	16.1
4	#13750.00	38.6 AV	68.2	-29.6	2.50 V	17	22.5	16.1
5	20625.00	57.9 PK	74.0	-16.1	2.15 V	279	61.2	-3.3
6	20625.00	41.7 AV	54.0	-12.3	2.15 V	279	45.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.6 PK			1.04 H	59	112.7	7.9
2	*6995.00	109.2 AV			1.04 H	59	101.3	7.9
3	#13990.00	51.0 PK	88.2	-37.2	2.51 H	17	34.3	16.7
4	#13990.00	38.8 AV	68.2	-29.4	2.51 H	17	22.1	16.7
5	20985.00	67.3 PK	74.0	-6.7	3.89 H	276	70.1	-2.8
6	20985.00	32.0 AV	54.0	-22.0	3.89 H	276	34.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.5 PK			1.85 V	236	112.6	7.9
2	*6995.00	109.1 AV			1.85 V	236	101.2	7.9
3	#13990.00	50.0 PK	88.2	-38.2	2.46 V	0	33.3	16.7
4	#13990.00	37.8 AV	68.2	-30.4	2.46 V	0	21.1	16.7
5	20985.00	59.1 PK	74.0	-14.9	2.16 V	292	61.9	-2.8
6	20985.00	42.6 AV	54.0	-11.4	2.16 V	292	45.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.5 PK			1.00 H	230	92.5	9.0
2	*7115.00	91.7 AV			1.00 H	230	82.7	9.0
3	#7125.00	86.7 PK	88.2	-1.5	1.00 H	230	77.7	9.0
4	#7125.00	59.1 AV	68.2	-9.1	1.00 H	230	50.1	9.0
5	7250.00	54.6 PK	74.0	-19.4	1.00 H	230	45.3	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.00 H	230	34.5	9.3
7	#14230.00	50.3 PK	88.2	-37.9	2.44 H	19	33.4	16.9
8	#14230.00	38.3 AV	68.2	-29.9	2.44 H	19	21.4	16.9
9	21345.00	67.8 PK	74.0	-6.2	3.81 H	285	69.4	-1.6
10	21345.00	32.4 AV	54.0	-21.6	3.81 H	285	34.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.3 PK			2.02 V	262	89.3	9.0
2	*7115.00	88.6 AV			2.02 V	262	79.6	9.0
3	#7125.00	83.2 PK	88.2	-5.0	2.02 V	262	74.2	9.0
4	#7125.00	55.7 AV	68.2	-12.5	2.02 V	262	46.7	9.0
5	7250.00	54.9 PK	74.0	-19.1	2.02 V	262	45.6	9.3
6	7250.00	43.7 AV	54.0	-10.3	2.02 V	262	34.4	9.3
7	#14230.00	50.5 PK	88.2	-37.7	2.47 V	7	33.6	16.9
8	#14230.00	38.4 AV	68.2	-29.8	2.47 V	7	21.5	16.9
9	21345.00	67.8 PK	74.0	-6.2	3.81 V	288	69.4	-1.6
10	21345.00	32.0 AV	54.0	-22.0	3.81 V	288	33.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.4 PK	88.2	-22.8	1.11 H	218	61.0	4.4
2	#5925.00	46.7 AV	68.2	-21.5	1.11 H	218	42.3	4.4
3	*5955.00	118.5 PK			1.11 H	218	114.0	4.5
4	*5955.00	108.7 AV			1.11 H	218	104.2	4.5
5	11910.00	50.5 PK	74.0	-23.5	2.53 H	25	36.8	13.7
6	11910.00	38.0 AV	54.0	-16.0	2.53 H	25	24.3	13.7
7	17865.00	67.8 PK	74.0	-6.2	3.88 H	283	43.5	24.3
8	17865.00	32.4 AV	54.0	-21.6	3.88 H	283	8.1	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.7 PK	88.2	-16.5	2.00 V	256	67.3	4.4
2	#5925.00	48.1 AV	68.2	-20.1	2.00 V	256	43.7	4.4
3	*5955.00	121.5 PK			2.00 V	256	117.0	4.5
4	*5955.00	110.0 AV			2.00 V	256	105.5	4.5
5	11910.00	50.3 PK	74.0	-23.7	2.49 V	11	36.6	13.7
6	11910.00	38.1 AV	54.0	-15.9	2.49 V	11	24.4	13.7
7	17865.00	67.5 PK	74.0	-6.5	3.88 V	279	43.2	24.3
8	17865.00	31.8 AV	54.0	-22.2	3.88 V	279	7.5	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.8 PK			1.11 H	211	112.4	6.4
2	*6475.00	109.1 AV			1.11 H	211	102.7	6.4
3	#12950.00	51.4 PK	88.2	-36.8	2.50 H	20	36.7	14.7
4	#12950.00	38.9 AV	68.2	-29.3	2.50 H	20	24.2	14.7
5	19425.00	67.7 PK	74.0	-6.3	3.85 H	265	71.5	-3.8
6	19425.00	32.3 AV	54.0	-21.7	3.85 H	265	36.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.3 PK			2.00 V	264	114.9	6.4
2	*6475.00	109.7 AV			2.00 V	264	103.3	6.4
3	#12950.00	50.2 PK	88.2	-38.0	2.48 V	0	35.5	14.7
4	#12950.00	38.2 AV	68.2	-30.0	2.48 V	0	23.5	14.7
5	19425.00	67.6 PK	74.0	-6.4	3.90 V	293	71.4	-3.8
6	19425.00	31.8 AV	54.0	-22.2	3.90 V	293	35.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.7 PK			1.10 H	213	111.7	7.0
2	*6695.00	108.8 AV			1.10 H	213	101.8	7.0
3	13390.00	50.2 PK	74.0	-23.8	2.46 H	4	34.9	15.3
4	13390.00	38.0 AV	54.0	-16.0	2.46 H	4	22.7	15.3
5	20085.00	67.9 PK	74.0	-6.1	3.80 H	274	71.4	-3.5
6	20085.00	32.4 AV	54.0	-21.6	3.80 H	274	35.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			1.99 V	254	114.0	7.0
2	*6695.00	109.7 AV			1.99 V	254	102.7	7.0
3	13390.00	50.0 PK	74.0	-24.0	2.45 V	7	34.7	15.3
4	13390.00	38.1 AV	54.0	-15.9	2.45 V	7	22.8	15.3
5	20085.00	67.2 PK	74.0	-6.8	3.81 V	267	70.7	-3.5
6	20085.00	31.6 AV	54.0	-22.4	3.81 V	267	35.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	117.2 PK			1.00 H	222	108.2	9.0
2	*7115.00	107.1 AV			1.00 H	222	98.1	9.0
3	#7125.00	85.5 PK	88.2	-2.7	1.00 H	222	76.5	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.00 H	222	55.7	9.0
5	7250.00	56.4 PK	74.0	-17.6	1.00 H	222	47.1	9.3
6	7250.00	44.4 AV	54.0	-9.6	1.00 H	222	35.1	9.3
7	#14230.00	50.7 PK	88.2	-37.5	2.54 H	0	33.8	16.9
8	#14230.00	38.6 AV	68.2	-29.6	2.54 H	0	21.7	16.9
9	21345.00	68.1 PK	74.0	-5.9	3.84 H	290	69.7	-1.6
10	21345.00	32.3 AV	54.0	-21.7	3.84 H	290	33.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	113.5 PK			1.13 V	237	104.5	9.0
2	*7115.00	102.9 AV			1.13 V	237	93.9	9.0
3	#7125.00	82.4 PK	88.2	-5.8	1.13 V	237	73.4	9.0
4	#7125.00	60.8 AV	68.2	-7.4	1.13 V	237	51.8	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.13 V	237	46.7	9.3
6	7250.00	44.1 AV	54.0	-9.9	1.13 V	237	34.8	9.3
7	#14230.00	50.5 PK	88.2	-37.7	2.50 V	17	33.6	16.9
8	#14230.00	38.6 AV	68.2	-29.6	2.50 V	17	21.7	16.9
9	21345.00	68.0 PK	74.0	-6.0	3.80 V	265	69.6	-1.6
10	21345.00	32.4 AV	54.0	-21.6	3.80 V	265	34.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.8 PK	88.2	-18.4	1.01 H	238	65.4	4.4
2	#5925.00	53.5 AV	68.2	-14.7	1.01 H	238	49.1	4.4
3	*5955.00	117.3 PK			1.01 H	238	112.8	4.5
4	*5955.00	106.4 AV			1.01 H	238	101.9	4.5
5	11910.00	51.1 PK	74.0	-22.9	2.52 H	23	37.4	13.7
6	11910.00	38.7 AV	54.0	-15.3	2.52 H	23	25.0	13.7
7	17865.00	67.6 PK	74.0	-6.4	3.85 H	264	43.3	24.3
8	17865.00	31.8 AV	54.0	-22.2	3.85 H	264	7.5	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.4 PK	88.2	-15.8	1.31 V	255	68.0	4.4
2	#5925.00	55.5 AV	68.2	-12.7	1.31 V	255	51.1	4.4
3	*5955.00	118.7 PK			1.31 V	255	114.2	4.5
4	*5955.00	107.5 AV			1.31 V	255	103.0	4.5
5	11910.00	50.3 PK	74.0	-23.7	2.47 V	20	36.6	13.7
6	11910.00	38.3 AV	54.0	-15.7	2.47 V	20	24.6	13.7
7	17865.00	67.0 PK	74.0	-7.0	3.86 V	292	42.7	24.3
8	17865.00	31.7 AV	54.0	-22.3	3.86 V	292	7.4	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.3 PK			1.01 H	235	110.9	6.4
2	*6475.00	106.7 AV			1.01 H	235	100.3	6.4
3	#12950.00	51.5 PK	88.2	-36.7	2.43 H	0	36.8	14.7
4	#12950.00	38.9 AV	68.2	-29.3	2.43 H	0	24.2	14.7
5	19425.00	67.6 PK	74.0	-6.4	3.85 H	268	71.4	-3.8
6	19425.00	32.0 AV	54.0	-22.0	3.85 H	268	35.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.6 PK			1.34 V	245	112.2	6.4
2	*6475.00	107.5 AV			1.34 V	245	101.1	6.4
3	#12950.00	50.5 PK	88.2	-37.7	2.45 V	0	35.8	14.7
4	#12950.00	38.5 AV	68.2	-29.7	2.45 V	0	23.8	14.7
5	19425.00	58.6 PK	74.0	-15.4	2.16 V	282	62.4	-3.8
6	19425.00	42.3 AV	54.0	-11.7	2.16 V	282	46.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.5 PK			1.00 H	229	110.5	7.0
2	*6695.00	106.3 AV			1.00 H	229	99.3	7.0
3	13390.00	51.4 PK	74.0	-22.6	2.54 H	0	36.1	15.3
4	13390.00	38.9 AV	54.0	-15.1	2.54 H	0	23.6	15.3
5	20085.00	67.8 PK	74.0	-6.2	3.80 H	293	71.3	-3.5
6	20085.00	32.4 AV	54.0	-21.6	3.80 H	293	35.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			1.26 V	269	111.9	7.0
2	*6695.00	107.8 AV			1.26 V	269	100.8	7.0
3	13390.00	50.6 PK	74.0	-23.4	2.54 V	0	35.3	15.3
4	13390.00	38.6 AV	54.0	-15.4	2.54 V	0	23.3	15.3
5	20085.00	58.5 PK	74.0	-15.5	2.20 V	291	62.0	-3.5
6	20085.00	42.1 AV	54.0	-11.9	2.20 V	291	45.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.7 PK			1.00 H	222	93.7	9.0
2	*7115.00	91.7 AV			1.00 H	222	82.7	9.0
3	#7125.00	86.5 PK	88.2	-1.7	1.00 H	222	77.5	9.0
4	#7125.00	59.3 AV	68.2	-8.9	1.00 H	222	50.3	9.0
5	7250.00	55.3 PK	74.0	-18.7	1.00 H	222	46.0	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.00 H	222	34.5	9.3
7	#14230.00	50.5 PK	88.2	-37.7	2.48 H	8	33.6	16.9
8	#14230.00	38.1 AV	68.2	-30.1	2.48 H	8	21.2	16.9
9	21345.00	68.1 PK	74.0	-5.9	3.83 H	278	69.7	-1.6
10	21345.00	32.6 AV	54.0	-21.4	3.83 H	278	34.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.4 PK			1.13 V	235	89.4	9.0
2	*7115.00	88.9 AV			1.13 V	235	79.9	9.0
3	#7125.00	79.8 PK	88.2	-8.4	1.13 V	235	70.8	9.0
4	#7125.00	56.4 AV	68.2	-11.8	1.13 V	235	47.4	9.0
5	7250.00	55.5 PK	74.0	-18.5	1.13 V	235	46.2	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.13 V	235	34.4	9.3
7	#14230.00	50.6 PK	88.2	-37.6	2.51 V	0	33.7	16.9
8	#14230.00	38.2 AV	68.2	-30.0	2.51 V	0	21.3	16.9
9	21345.00	67.3 PK	74.0	-6.7	3.78 V	264	68.9	-1.6
10	21345.00	31.8 AV	54.0	-22.2	3.78 V	264	33.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.3 PK	88.2	-9.9	1.02 H	235	73.9	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.02 H	235	61.9	4.4
3	*5985.00	109.0 PK			1.02 H	235	104.4	4.6
4	*5985.00	97.9 AV			1.02 H	235	93.3	4.6
5	11970.00	51.1 PK	74.0	-22.9	2.47 H	0	37.3	13.8
6	11970.00	39.0 AV	54.0	-15.0	2.47 H	0	25.2	13.8
7	17955.00	57.7 PK	74.0	-16.3	2.22 H	276	31.0	26.7
8	17955.00	41.6 AV	54.0	-12.4	2.22 H	276	14.9	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	2.09 V	5	71.9	4.4
2	#5925.00	64.6 AV	68.2	-3.6	2.09 V	5	60.2	4.4
3	*5985.00	108.5 PK			2.09 V	5	103.9	4.6
4	*5985.00	97.4 AV			2.09 V	5	92.8	4.6
5	11970.00	50.1 PK	74.0	-23.9	2.53 V	0	36.3	13.8
6	11970.00	37.9 AV	54.0	-16.1	2.53 V	0	24.1	13.8
7	17955.00	68.3 PK	74.0	-5.7	3.80 V	274	41.6	26.7
8	17955.00	32.5 AV	54.0	-21.5	3.80 V	274	5.8	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.2 PK			1.06 H	220	102.9	6.3
2	*6465.00	97.8 AV			1.06 H	220	91.5	6.3
3	#12930.00	51.4 PK	88.2	-36.8	2.54 H	17	36.6	14.8
4	#12930.00	38.9 AV	68.2	-29.3	2.54 H	17	24.1	14.8
5	19395.00	58.0 PK	74.0	-16.0	2.23 H	286	61.7	-3.7
6	19395.00	41.9 AV	54.0	-12.1	2.23 H	286	45.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.0 PK			2.14 V	0	102.7	6.3
2	*6465.00	97.7 AV			2.14 V	0	91.4	6.3
3	#12930.00	50.0 PK	88.2	-38.2	2.56 V	3	35.2	14.8
4	#12930.00	37.9 AV	68.2	-30.3	2.56 V	3	23.1	14.8
5	19395.00	58.7 PK	74.0	-15.3	2.16 V	278	62.4	-3.7
6	19395.00	42.5 AV	54.0	-11.5	2.16 V	278	46.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.5 PK			1.06 H	225	102.5	7.0
2	*6705.00	98.2 AV			1.06 H	225	91.2	7.0
3	#13410.00	51.5 PK	88.2	-36.7	2.51 H	8	36.2	15.3
4	#13410.00	39.0 AV	68.2	-29.2	2.51 H	8	23.7	15.3
5	20115.00	58.9 PK	74.0	-15.1	2.17 H	280	62.4	-3.5
6	20115.00	42.4 AV	54.0	-11.6	2.17 H	280	45.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.1 PK			2.12 V	10	101.1	7.0
2	*6705.00	97.0 AV			2.12 V	10	90.0	7.0
3	#13410.00	50.4 PK	88.2	-37.8	2.49 V	17	35.1	15.3
4	#13410.00	38.5 AV	68.2	-29.7	2.49 V	17	23.2	15.3
5	20115.00	58.4 PK	74.0	-15.6	2.19 V	279	61.9	-3.5
6	20115.00	42.1 AV	54.0	-11.9	2.19 V	279	45.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.2 PK			1.00 H	223	103.9	8.3
2	*7025.00	101.4 AV			1.00 H	223	93.1	8.3
3	#7125.00	78.6 PK	88.2	-9.6	1.00 H	223	69.6	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.00 H	223	57.4	9.0
5	7250.00	55.8 PK	74.0	-18.2	1.00 H	223	46.5	9.3
6	7250.00	45.4 AV	54.0	-8.6	1.00 H	223	36.1	9.3
7	#14050.00	50.3 PK	88.2	-37.9	2.51 H	0	33.7	16.6
8	#14050.00	38.1 AV	68.2	-30.1	2.51 H	0	21.5	16.6
9	21075.00	57.0 PK	74.0	-17.0	1.79 H	306	59.2	-2.2
10	21075.00	43.3 AV	54.0	-10.7	1.79 H	306	45.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.1 PK			1.16 V	234	102.8	8.3
2	*7025.00	99.3 AV			1.16 V	234	91.0	8.3
3	#7125.00	72.2 PK	88.2	-16.0	1.16 V	234	63.2	9.0
4	#7125.00	61.8 AV	68.2	-6.4	1.16 V	234	52.8	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.16 V	234	46.6	9.3
6	7250.00	44.7 AV	54.0	-9.3	1.16 V	234	35.4	9.3
7	#14050.00	50.7 PK	88.2	-37.5	2.49 V	0	34.1	16.6
8	#14050.00	38.5 AV	68.2	-29.7	2.49 V	0	21.9	16.6
9	21075.00	58.4 PK	74.0	-15.6	2.20 V	278	60.6	-2.2
10	21075.00	42.1 AV	54.0	-11.9	2.20 V	278	44.3	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.01 H	234	77.9	4.4
2	#5925.00	66.2 AV	68.2	-2.0	1.01 H	234	61.8	4.4
3	*6025.00	106.2 PK			1.01 H	234	101.7	4.5
4	*6025.00	95.3 AV			1.01 H	234	90.8	4.5
5	12050.00	51.3 PK	74.0	-22.7	2.51 H	0	37.2	14.1
6	12050.00	38.9 AV	54.0	-15.1	2.51 H	0	24.8	14.1
7	18075.00	56.9 PK	74.0	-17.1	1.78 H	311	61.6	-4.7
8	18075.00	43.3 AV	54.0	-10.7	1.78 H	311	48.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	1.42 V	286	74.1	4.4
2	#5925.00	64.9 AV	68.2	-3.3	1.42 V	286	60.5	4.4
3	*6025.00	103.6 PK			1.42 V	286	99.1	4.5
4	*6025.00	92.9 AV			1.42 V	286	88.4	4.5
5	12050.00	50.1 PK	74.0	-23.9	2.54 V	13	36.0	14.1
6	12050.00	38.2 AV	54.0	-15.8	2.54 V	13	24.1	14.1
7	18075.00	57.9 PK	74.0	-16.1	2.15 V	272	62.6	-4.7
8	18075.00	41.8 AV	54.0	-12.2	2.15 V	272	46.5	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.6 PK			1.07 H	239	98.9	6.7
2	*6505.00	94.9 AV			1.07 H	239	88.2	6.7
3	#13010.00	50.8 PK	88.2	-37.4	2.51 H	11	36.2	14.6
4	#13010.00	38.7 AV	68.2	-29.5	2.51 H	11	24.1	14.6
5	19515.00	57.6 PK	74.0	-16.4	1.81 H	286	61.7	-4.1
6	19515.00	43.9 AV	54.0	-10.1	1.81 H	286	48.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			1.38 V	301	96.7	6.7
2	*6505.00	93.0 AV			1.38 V	301	86.3	6.7
3	#13010.00	50.3 PK	88.2	-37.9	2.55 V	7	35.7	14.6
4	#13010.00	38.0 AV	68.2	-30.2	2.55 V	7	23.4	14.6
5	19515.00	59.0 PK	74.0	-15.0	2.25 V	275	63.1	-4.1
6	19515.00	42.5 AV	54.0	-11.5	2.25 V	275	46.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.0 PK			1.03 H	250	99.1	6.9
2	*6665.00	95.3 AV			1.03 H	250	88.4	6.9
3	13330.00	51.4 PK	74.0	-22.6	2.42 H	19	36.3	15.1
4	13330.00	39.2 AV	54.0	-14.8	2.42 H	19	24.1	15.1
5	19995.00	57.6 PK	74.0	-16.4	1.78 H	292	61.2	-3.6
6	19995.00	43.8 AV	54.0	-10.2	1.78 H	292	47.4	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.6 PK			1.42 V	276	96.7	6.9
2	*6665.00	93.2 AV			1.42 V	276	86.3	6.9
3	13330.00	50.4 PK	74.0	-23.6	2.51 V	0	35.3	15.1
4	13330.00	38.0 AV	54.0	-16.0	2.51 V	0	22.9	15.1
5	19995.00	59.1 PK	74.0	-14.9	2.22 V	274	62.7	-3.6
6	19995.00	43.0 AV	54.0	-11.0	2.22 V	274	46.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.2 PK			1.06 H	220	102.3	7.9
2	*6985.00	97.6 AV			1.06 H	220	89.7	7.9
3	#7125.00	83.9 PK	88.2	-4.3	1.06 H	220	74.9	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.06 H	220	57.4	9.0
5	7250.00	65.3 PK	74.0	-8.7	1.06 H	220	56.0	9.3
6	7250.00	51.7 AV	54.0	-2.3	1.06 H	220	42.4	9.3
7	#13970.00	51.4 PK	88.2	-36.8	2.46 H	0	34.7	16.7
8	#13970.00	39.1 AV	68.2	-29.1	2.46 H	0	22.4	16.7
9	20955.00	56.8 PK	74.0	-17.2	1.82 H	284	59.5	-2.7
10	20955.00	43.3 AV	54.0	-10.7	1.82 H	284	46.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.8 PK			2.06 V	261	98.9	7.9
2	*6985.00	95.6 AV			2.06 V	261	87.7	7.9
3	#7125.00	81.2 PK	88.2	-7.0	2.06 V	261	72.2	9.0
4	#7125.00	64.8 AV	68.2	-3.4	2.06 V	261	55.8	9.0
5	7250.00	62.9 PK	74.0	-11.1	2.06 V	261	53.6	9.3
6	7250.00	50.4 AV	54.0	-3.6	2.06 V	261	41.1	9.3
7	#13970.00	50.6 PK	88.2	-37.6	2.49 V	3	33.9	16.7
8	#13970.00	38.4 AV	68.2	-29.8	2.49 V	3	21.7	16.7
9	20955.00	59.2 PK	74.0	-14.8	2.20 V	283	61.9	-2.7
10	20955.00	42.8 AV	54.0	-11.2	2.20 V	283	45.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.1 PK	88.2	-8.1	1.16 H	222	75.7	4.4
2	#5925.00	66.6 AV	68.2	-1.6	1.16 H	222	62.2	4.4
3	*6025.00	105.0 PK			1.16 H	222	100.5	4.5
4	*6025.00	94.3 AV			1.16 H	222	89.8	4.5
5	12050.00	50.7 PK	74.0	-23.3	2.46 H	0	36.6	14.1
6	12050.00	38.3 AV	54.0	-15.7	2.46 H	0	24.2	14.1
7	18075.00	57.9 PK	74.0	-16.1	2.21 H	291	62.6	-4.7
8	18075.00	41.6 AV	54.0	-12.4	2.21 H	291	46.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.2 PK	88.2	-8.0	1.40 V	324	75.8	4.4
2	#5925.00	63.0 AV	68.2	-5.2	1.40 V	324	58.6	4.4
3	*6025.00	104.2 PK			1.40 V	324	99.7	4.5
4	*6025.00	92.7 AV			1.40 V	324	88.2	4.5
5	12050.00	50.8 PK	74.0	-23.2	2.52 V	14	36.7	14.1
6	12050.00	38.5 AV	54.0	-15.5	2.52 V	14	24.4	14.1
7	18075.00	58.2 PK	74.0	-15.8	2.16 V	263	62.9	-4.7
8	18075.00	42.0 AV	54.0	-12.0	2.16 V	263	46.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.5 PK			1.15 H	220	97.8	6.7
2	*6505.00	94.1 AV			1.15 H	220	87.4	6.7
3	#13010.00	50.4 PK	88.2	-37.8	2.43 H	23	35.8	14.6
4	#13010.00	38.6 AV	68.2	-29.6	2.43 H	23	24.0	14.6
5	19515.00	58.5 PK	74.0	-15.5	2.15 H	293	62.6	-4.1
6	19515.00	42.0 AV	54.0	-12.0	2.15 H	293	46.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.2 PK			1.46 V	315	97.5	6.7
2	*6505.00	92.6 AV			1.46 V	315	85.9	6.7
3	#13010.00	50.2 PK	88.2	-38.0	2.50 V	0	35.6	14.6
4	#13010.00	38.1 AV	68.2	-30.1	2.50 V	0	23.5	14.6
5	19515.00	58.1 PK	74.0	-15.9	2.19 V	283	62.2	-4.1
6	19515.00	42.1 AV	54.0	-11.9	2.19 V	283	46.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.1 PK			1.15 H	234	98.2	6.9
2	*6665.00	94.7 AV			1.15 H	234	87.8	6.9
3	13330.00	51.3 PK	74.0	-22.7	2.43 H	8	36.2	15.1
4	13330.00	39.2 AV	54.0	-14.8	2.43 H	8	24.1	15.1
5	19995.00	58.0 PK	74.0	-16.0	2.22 H	274	61.6	-3.6
6	19995.00	41.9 AV	54.0	-12.1	2.22 H	274	45.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			1.40 V	315	98.0	6.9
2	*6665.00	93.1 AV			1.40 V	315	86.2	6.9
3	13330.00	50.6 PK	74.0	-23.4	2.44 V	0	35.5	15.1
4	13330.00	38.5 AV	54.0	-15.5	2.44 V	0	23.4	15.1
5	19995.00	58.8 PK	74.0	-15.2	2.15 V	291	62.4	-3.6
6	19995.00	42.3 AV	54.0	-11.7	2.15 V	291	45.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.6 PK			1.01 H	221	100.7	7.9
2	*6985.00	97.1 AV			1.01 H	221	89.2	7.9
3	#7125.00	78.5 PK	88.2	-9.7	1.01 H	221	69.5	9.0
4	#7125.00	66.6 AV	68.2	-1.6	1.01 H	221	57.6	9.0
5	7250.00	65.6 PK	74.0	-8.4	1.01 H	221	56.3	9.3
6	7250.00	52.5 AV	54.0	-1.5	1.01 H	221	43.2	9.3
7	#13970.00	50.3 PK	88.2	-37.9	2.41 H	1	33.6	16.7
8	#13970.00	38.3 AV	68.2	-29.9	2.41 H	1	21.6	16.7
9	20955.00	58.1 PK	74.0	-15.9	2.24 H	282	60.8	-2.7
10	20955.00	41.9 AV	54.0	-12.1	2.24 H	282	44.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.3 PK			2.03 V	263	99.4	7.9
2	*6985.00	95.3 AV			2.03 V	263	87.4	7.9
3	#7125.00	73.7 PK	88.2	-14.5	2.03 V	263	64.7	9.0
4	#7125.00	63.1 AV	68.2	-5.1	2.03 V	263	54.1	9.0
5	7250.00	60.2 PK	74.0	-13.8	2.03 V	263	50.9	9.3
6	7250.00	49.1 AV	54.0	-4.9	2.03 V	263	39.8	9.3
7	#13970.00	50.5 PK	88.2	-37.7	2.51 V	12	33.8	16.7
8	#13970.00	38.5 AV	68.2	-29.7	2.51 V	12	21.8	16.7
9	20955.00	58.3 PK	74.0	-15.7	2.15 V	267	61.0	-2.7
10	20955.00	42.0 AV	54.0	-12.0	2.15 V	267	44.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	2.21 H	103	69.2	4.4
2	#5925.00	60.7 AV	68.2	-7.5	2.21 H	103	56.3	4.4
3	*5955.00	115.6 PK			2.21 H	103	111.1	4.5
4	*5955.00	106.5 AV			2.21 H	103	102.0	4.5
5	11910.00	47.6 PK	74.0	-26.4	2.07 H	305	33.9	13.7
6	11910.00	35.3 AV	54.0	-18.7	2.07 H	305	21.6	13.7
7	17865.00	36.8 PK	74.0	-37.2	3.59 H	147	12.5	24.3
8	17865.00	25.0 AV	54.0	-29.0	3.59 H	147	0.7	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.7 PK	88.2	-17.5	2.76 V	42	66.3	4.4
2	#5925.00	54.6 AV	68.2	-13.6	2.76 V	42	50.2	4.4
3	*5955.00	109.4 PK			2.76 V	42	104.9	4.5
4	*5955.00	100.5 AV			2.76 V	42	96.0	4.5
5	11910.00	46.3 PK	74.0	-27.7	3.84 V	344	32.6	13.7
6	11910.00	33.7 AV	54.0	-20.3	3.84 V	344	20.0	13.7
7	17865.00	38.3 PK	74.0	-35.7	2.83 V	306	14.0	24.3
8	17865.00	25.2 AV	54.0	-28.8	2.83 V	306	0.9	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.8 PK			1.11 H	350	109.0	4.8
2	*6195.00	103.5 AV			1.11 H	350	98.7	4.8
3	12390.00	47.5 PK	74.0	-26.5	2.04 H	308	33.6	13.9
4	12390.00	34.9 AV	54.0	-19.1	2.04 H	308	21.0	13.9
5	18585.00	37.0 PK	74.0	-37.0	3.53 H	156	42.0	-5.0
6	18585.00	25.2 AV	54.0	-28.8	3.53 H	156	30.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.1 PK			2.67 V	21	107.3	4.8
2	*6195.00	102.6 AV			2.67 V	21	97.8	4.8
3	12390.00	46.5 PK	74.0	-27.5	3.81 V	342	32.6	13.9
4	12390.00	33.9 AV	54.0	-20.1	3.81 V	342	20.0	13.9
5	18585.00	38.5 PK	74.0	-35.5	2.88 V	315	43.5	-5.0
6	18585.00	25.4 AV	54.0	-28.6	2.88 V	315	30.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.7 PK			1.13 H	346	107.5	6.2
2	*6415.00	103.3 AV			1.13 H	346	97.1	6.2
3	#12830.00	47.9 PK	88.2	-40.3	2.08 H	316	33.4	14.5
4	#12830.00	35.8 AV	68.2	-32.4	2.08 H	316	21.3	14.5
5	19245.00	37.2 PK	74.0	-36.8	3.54 H	159	41.0	-3.8
6	19245.00	25.4 AV	54.0	-28.6	3.54 H	159	29.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.1 PK			2.67 V	31	105.9	6.2
2	*6415.00	102.7 AV			2.67 V	31	96.5	6.2
3	#12830.00	46.5 PK	88.2	-41.7	3.88 V	357	32.0	14.5
4	#12830.00	34.1 AV	68.2	-34.1	3.88 V	357	19.6	14.5
5	19245.00	37.9 PK	74.0	-36.1	2.79 V	312	41.7	-3.8
6	19245.00	25.0 AV	54.0	-29.0	2.79 V	312	28.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	113.2 PK			1.13 H	351	107.0	6.2
2	*6435.00	103.0 AV			1.13 H	351	96.8	6.2
3	#12870.00	47.1 PK	88.2	-41.1	2.12 H	306	32.4	14.7
4	#12870.00	35.0 AV	68.2	-33.2	2.12 H	306	20.3	14.7
5	19305.00	37.3 PK	74.0	-36.7	3.62 H	156	41.0	-3.7
6	19305.00	25.2 AV	54.0	-28.8	3.62 H	156	28.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.0 PK			2.64 V	21	105.8	6.2
2	*6435.00	102.8 AV			2.64 V	21	96.6	6.2
3	#12870.00	45.9 PK	88.2	-42.3	3.90 V	337	31.2	14.7
4	#12870.00	33.4 AV	68.2	-34.8	3.90 V	337	18.7	14.7
5	19305.00	38.4 PK	74.0	-35.6	2.88 V	301	42.1	-3.7
6	19305.00	25.5 AV	54.0	-28.5	2.88 V	301	29.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.1 PK			1.11 H	360	107.7	6.4
2	*6475.00	103.7 AV			1.11 H	360	97.3	6.4
3	#12950.00	47.7 PK	88.2	-40.5	2.08 H	320	33.0	14.7
4	#12950.00	35.4 AV	68.2	-32.8	2.08 H	320	20.7	14.7
5	19425.00	36.7 PK	74.0	-37.3	3.63 H	137	40.5	-3.8
6	19425.00	25.1 AV	54.0	-28.9	3.63 H	137	28.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	112.3 PK			2.69 V	26	105.9	6.4
2	*6475.00	103.1 AV			2.69 V	26	96.7	6.4
3	#12950.00	46.0 PK	88.2	-42.2	3.88 V	328	31.3	14.7
4	#12950.00	33.4 AV	68.2	-34.8	3.88 V	328	18.7	14.7
5	19425.00	38.1 PK	74.0	-35.9	2.86 V	317	41.9	-3.8
6	19425.00	24.7 AV	54.0	-29.3	2.86 V	317	28.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	114.1 PK			1.06 H	335	107.4	6.7
2	*6515.00	103.9 AV			1.06 H	335	97.2	6.7
3	#13030.00	47.4 PK	88.2	-40.8	2.06 H	308	32.8	14.6
4	#13030.00	35.3 AV	68.2	-32.9	2.06 H	308	20.7	14.6
5	19545.00	36.4 PK	74.0	-37.6	3.63 H	142	40.5	-4.1
6	19545.00	24.8 AV	54.0	-29.2	3.63 H	142	28.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.0 PK			2.68 V	24	105.3	6.7
2	*6515.00	102.8 AV			2.68 V	24	96.1	6.7
3	#13030.00	46.7 PK	88.2	-41.5	3.86 V	334	32.1	14.6
4	#13030.00	33.9 AV	68.2	-34.3	3.86 V	334	19.3	14.6
5	19545.00	38.2 PK	74.0	-35.8	2.89 V	315	42.3	-4.1
6	19545.00	24.8 AV	54.0	-29.2	2.89 V	315	28.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.3 PK			1.11 H	360	106.5	6.8
2	*6535.00	103.1 AV			1.11 H	360	96.3	6.8
3	#13070.00	47.5 PK	88.2	-40.7	2.03 H	290	32.8	14.7
4	#13070.00	35.2 AV	68.2	-33.0	2.03 H	290	20.5	14.7
5	19605.00	36.6 PK	74.0	-37.4	3.56 H	160	40.6	-4.0
6	19605.00	24.7 AV	54.0	-29.3	3.56 H	160	28.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.8 PK			2.68 V	30	106.0	6.8
2	*6535.00	103.1 AV			2.68 V	30	96.3	6.8
3	#13070.00	46.7 PK	88.2	-41.5	3.90 V	349	32.0	14.7
4	#13070.00	34.1 AV	68.2	-34.1	3.90 V	349	19.4	14.7
5	19605.00	38.8 PK	74.0	-35.2	2.88 V	308	42.8	-4.0
6	19605.00	25.5 AV	54.0	-28.5	2.88 V	308	29.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.0 PK			1.12 H	349	107.0	7.0
2	*6695.00	103.8 AV			1.12 H	349	96.8	7.0
3	13390.00	48.0 PK	74.0	-26.0	2.10 H	290	32.7	15.3
4	13390.00	35.8 AV	54.0	-18.2	2.10 H	290	20.5	15.3
5	20085.00	36.6 PK	74.0	-37.4	3.60 H	138	40.1	-3.5
6	20085.00	24.8 AV	54.0	-29.2	3.60 H	138	28.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.7 PK			2.62 V	20	104.7	7.0
2	*6695.00	102.2 AV			2.62 V	20	95.2	7.0
3	13390.00	46.3 PK	74.0	-27.7	3.81 V	330	31.0	15.3
4	13390.00	33.6 AV	54.0	-20.4	3.81 V	330	18.3	15.3
5	20085.00	38.0 PK	74.0	-36.0	2.88 V	293	41.5	-3.5
6	20085.00	24.8 AV	54.0	-29.2	2.88 V	293	28.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.0 PK			1.16 H	335	107.0	7.0
2	*6855.00	103.7 AV			1.16 H	335	96.7	7.0
3	#13710.00	47.3 PK	88.2	-40.9	2.10 H	304	31.0	16.3
4	#13710.00	34.8 AV	68.2	-33.4	2.10 H	304	18.5	16.3
5	20565.00	36.7 PK	74.0	-37.3	3.61 H	155	40.0	-3.3
6	20565.00	24.7 AV	54.0	-29.3	3.61 H	155	28.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.8 PK			2.64 V	16	104.8	7.0
2	*6855.00	102.5 AV			2.64 V	16	95.5	7.0
3	#13710.00	46.6 PK	88.2	-41.6	3.86 V	334	30.3	16.3
4	#13710.00	33.7 AV	68.2	-34.5	3.86 V	334	17.4	16.3
5	20565.00	37.9 PK	74.0	-36.1	2.80 V	310	41.2	-3.3
6	20565.00	24.8 AV	54.0	-29.2	2.80 V	310	28.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	114.1 PK			1.14 H	360	107.0	7.1
2	*6875.00	103.8 AV			1.14 H	360	96.7	7.1
3	#13750.00	47.3 PK	88.2	-40.9	2.03 H	304	31.2	16.1
4	#13750.00	35.1 AV	68.2	-33.1	2.03 H	304	19.0	16.1
5	20625.00	37.2 PK	74.0	-36.8	3.53 H	142	40.5	-3.3
6	20625.00	25.2 AV	54.0	-28.8	3.53 H	142	28.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	112.3 PK			2.71 V	14	105.2	7.1
2	*6875.00	103.0 AV			2.71 V	14	95.9	7.1
3	#13750.00	46.3 PK	88.2	-41.9	3.90 V	351	30.2	16.1
4	#13750.00	33.6 AV	68.2	-34.6	3.90 V	351	17.5	16.1
5	20625.00	38.9 PK	74.0	-35.1	2.87 V	316	42.2	-3.3
6	20625.00	25.5 AV	54.0	-28.5	2.87 V	316	28.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	113.6 PK			1.16 H	346	105.7	7.9
2	*6995.00	103.3 AV			1.16 H	346	95.4	7.9
3	#13990.00	48.0 PK	88.2	-40.2	2.13 H	297	31.3	16.7
4	#13990.00	35.7 AV	68.2	-32.5	2.13 H	297	19.0	16.7
5	20985.00	36.7 PK	74.0	-37.3	3.57 H	157	39.5	-2.8
6	20985.00	24.9 AV	54.0	-29.1	3.57 H	157	27.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	112.4 PK			2.65 V	30	104.5	7.9
2	*6995.00	102.7 AV			2.65 V	30	94.8	7.9
3	#13990.00	47.0 PK	88.2	-41.2	3.88 V	331	30.3	16.7
4	#13990.00	34.2 AV	68.2	-34.0	3.88 V	331	17.5	16.7
5	20985.00	38.1 PK	74.0	-35.9	2.87 V	321	40.9	-2.8
6	20985.00	24.9 AV	54.0	-29.1	2.87 V	321	27.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.5 PK			2.12 H	285	96.5	9.0
2	*7115.00	96.8 AV			2.12 H	285	87.8	9.0
3	#7125.00	76.6 PK	88.2	-11.6	2.12 H	285	67.6	9.0
4	#7125.00	64.4 AV	68.2	-3.8	2.12 H	285	55.4	9.0
5	7250.00	57.4 PK	74.0	-16.6	2.12 H	285	48.1	9.3
6	7250.00	44.2 AV	54.0	-9.8	2.12 H	285	34.9	9.3
7	#14230.00	48.0 PK	88.2	-40.2	2.11 H	302	31.1	16.9
8	#14230.00	35.6 AV	68.2	-32.6	2.11 H	302	18.7	16.9
9	21345.00	37.4 PK	74.0	-36.6	3.56 H	140	39.0	-1.6
10	21345.00	25.4 AV	54.0	-28.6	3.56 H	140	27.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.5 PK			1.96 V	44	98.5	9.0
2	*7115.00	98.9 AV			1.96 V	44	89.9	9.0
3	#7125.00	82.0 PK	88.2	-6.2	1.96 V	44	73.0	9.0
4	#7125.00	66.6 AV	68.2	-1.6	1.96 V	44	57.6	9.0
5	7250.00	56.2 PK	74.0	-17.8	1.96 V	44	46.9	9.3
6	7250.00	44.3 AV	54.0	-9.7	1.96 V	44	35.0	9.3
7	#14230.00	46.3 PK	88.2	-41.9	3.88 V	340	29.4	16.9
8	#14230.00	33.5 AV	68.2	-34.7	3.88 V	340	16.6	16.9
9	21345.00	38.1 PK	74.0	-35.9	2.81 V	307	39.7	-1.6
10	21345.00	25.2 AV	54.0	-28.8	2.81 V	307	26.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

1Tx NSS1(SU)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	2.23 H	50	73.2	4.4
2	#5925.00	63.7 AV	68.2	-4.5	2.23 H	50	59.3	4.4
3	*5955.00	116.4 PK			2.23 H	50	111.9	4.5
4	*5955.00	105.6 AV			2.23 H	50	101.1	4.5
5	11910.00	47.3 PK	74.0	-26.7	2.05 H	304	33.6	13.7
6	11910.00	35.1 AV	54.0	-18.9	2.05 H	304	21.4	13.7
7	17865.00	36.8 PK	74.0	-37.2	3.55 H	147	12.5	24.3
8	17865.00	25.2 AV	54.0	-28.8	3.55 H	147	0.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.0 PK	88.2	-22.2	1.27 V	327	61.6	4.4
2	#5925.00	56.7 AV	68.2	-11.5	1.27 V	327	52.3	4.4
3	*5955.00	110.1 PK			1.27 V	327	105.6	4.5
4	*5955.00	99.4 AV			1.27 V	327	94.9	4.5
5	11910.00	46.8 PK	74.0	-27.2	3.87 V	345	33.1	13.7
6	11910.00	33.9 AV	54.0	-20.1	3.87 V	345	20.2	13.7
7	17865.00	38.6 PK	74.0	-35.4	2.87 V	320	14.3	24.3
8	17865.00	25.6 AV	54.0	-28.4	2.87 V	320	1.3	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.1 PK			1.11 H	350	110.3	4.8
2	*6195.00	102.8 AV			1.11 H	350	98.0	4.8
3	12390.00	47.0 PK	74.0	-27.0	2.07 H	292	33.1	13.9
4	12390.00	34.9 AV	54.0	-19.1	2.07 H	292	21.0	13.9
5	18585.00	36.1 PK	74.0	-37.9	3.57 H	150	41.1	-5.0
6	18585.00	24.5 AV	54.0	-29.5	3.57 H	150	29.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.3 PK			2.67 V	21	108.5	4.8
2	*6195.00	102.2 AV			2.67 V	21	97.4	4.8
3	12390.00	46.2 PK	74.0	-27.8	3.78 V	338	32.3	13.9
4	12390.00	33.4 AV	54.0	-20.6	3.78 V	338	19.5	13.9
5	18585.00	37.9 PK	74.0	-36.1	2.83 V	318	42.9	-5.0
6	18585.00	25.0 AV	54.0	-29.0	2.83 V	318	30.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			1.08 H	360	108.9	6.2
2	*6415.00	102.6 AV			1.08 H	360	96.4	6.2
3	#12830.00	47.0 PK	88.2	-41.2	2.05 H	319	32.5	14.5
4	#12830.00	34.8 AV	68.2	-33.4	2.05 H	319	20.3	14.5
5	19245.00	36.6 PK	74.0	-37.4	3.55 H	153	40.4	-3.8
6	19245.00	25.0 AV	54.0	-29.0	3.55 H	153	28.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.3 PK			2.62 V	31	107.1	6.2
2	*6415.00	102.3 AV			2.62 V	31	96.1	6.2
3	#12830.00	46.5 PK	88.2	-41.7	3.88 V	353	32.0	14.5
4	#12830.00	33.9 AV	68.2	-34.3	3.88 V	353	19.4	14.5
5	19245.00	38.1 PK	74.0	-35.9	2.77 V	292	41.9	-3.8
6	19245.00	24.8 AV	54.0	-29.2	2.77 V	292	28.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	115.0 PK			1.10 H	360	108.8	6.2
2	*6435.00	102.7 AV			1.10 H	360	96.5	6.2
3	#12870.00	47.6 PK	88.2	-40.6	2.10 H	294	32.9	14.7
4	#12870.00	35.4 AV	68.2	-32.8	2.10 H	294	20.7	14.7
5	19305.00	36.9 PK	74.0	-37.1	3.56 H	136	40.6	-3.7
6	19305.00	25.2 AV	54.0	-28.8	3.56 H	136	28.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	112.9 PK			2.61 V	10	106.7	6.2
2	*6435.00	102.0 AV			2.61 V	10	95.8	6.2
3	#12870.00	46.3 PK	88.2	-41.9	3.79 V	359	31.6	14.7
4	#12870.00	33.6 AV	68.2	-34.6	3.79 V	359	18.9	14.7
5	19305.00	38.6 PK	74.0	-35.4	2.84 V	294	42.3	-3.7
6	19305.00	25.4 AV	54.0	-28.6	2.84 V	294	29.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.8 PK			1.13 H	360	108.4	6.4
2	*6475.00	102.7 AV			1.13 H	360	96.3	6.4
3	#12950.00	47.3 PK	88.2	-40.9	2.06 H	315	32.6	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.06 H	315	20.6	14.7
5	19425.00	37.3 PK	74.0	-36.7	3.56 H	154	41.1	-3.8
6	19425.00	25.5 AV	54.0	-28.5	3.56 H	154	29.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	113.2 PK			2.72 V	21	106.8	6.4
2	*6475.00	101.9 AV			2.72 V	21	95.5	6.4
3	#12950.00	46.1 PK	88.2	-42.1	3.85 V	334	31.4	14.7
4	#12950.00	33.3 AV	68.2	-34.9	3.85 V	334	18.6	14.7
5	19425.00	38.6 PK	74.0	-35.4	2.82 V	303	42.4	-3.8
6	19425.00	25.6 AV	54.0	-28.4	2.82 V	303	29.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.7 PK			1.14 H	349	109.0	6.7
2	*6515.00	103.3 AV			1.14 H	349	96.6	6.7
3	#13030.00	47.7 PK	88.2	-40.5	2.03 H	310	33.1	14.6
4	#13030.00	35.4 AV	68.2	-32.8	2.03 H	310	20.8	14.6
5	19545.00	37.2 PK	74.0	-36.8	3.55 H	157	41.3	-4.1
6	19545.00	25.3 AV	54.0	-28.7	3.55 H	157	29.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	113.4 PK			2.62 V	29	106.7	6.7
2	*6515.00	102.5 AV			2.62 V	29	95.8	6.7
3	#13030.00	45.9 PK	88.2	-42.3	3.82 V	344	31.3	14.6
4	#13030.00	33.5 AV	68.2	-34.7	3.82 V	344	18.9	14.6
5	19545.00	38.4 PK	74.0	-35.6	2.86 V	321	42.5	-4.1
6	19545.00	25.4 AV	54.0	-28.6	2.86 V	321	29.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.1 PK			1.08 H	338	108.3	6.8
2	*6535.00	102.7 AV			1.08 H	338	95.9	6.8
3	#13070.00	47.2 PK	88.2	-41.0	2.08 H	312	32.5	14.7
4	#13070.00	34.9 AV	68.2	-33.3	2.08 H	312	20.2	14.7
5	19605.00	36.9 PK	74.0	-37.1	3.60 H	145	40.9	-4.0
6	19605.00	24.8 AV	54.0	-29.2	3.60 H	145	28.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.8 PK			2.64 V	15	106.0	6.8
2	*6535.00	101.7 AV			2.64 V	15	94.9	6.8
3	#13070.00	46.2 PK	88.2	-42.0	3.87 V	356	31.5	14.7
4	#13070.00	33.6 AV	68.2	-34.6	3.87 V	356	18.9	14.7
5	19605.00	38.9 PK	74.0	-35.1	2.78 V	293	42.9	-4.0
6	19605.00	25.5 AV	54.0	-28.5	2.78 V	293	29.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.3 PK			1.11 H	360	108.3	7.0
2	*6695.00	103.0 AV			1.11 H	360	96.0	7.0
3	13390.00	47.9 PK	74.0	-26.1	2.04 H	310	32.6	15.3
4	13390.00	35.5 AV	54.0	-18.5	2.04 H	310	20.2	15.3
5	20085.00	37.1 PK	74.0	-36.9	3.65 H	150	40.6	-3.5
6	20085.00	25.4 AV	54.0	-28.6	3.65 H	150	28.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.1 PK			2.62 V	17	106.1	7.0
2	*6695.00	102.3 AV			2.62 V	17	95.3	7.0
3	13390.00	46.8 PK	74.0	-27.2	3.85 V	330	31.5	15.3
4	13390.00	34.1 AV	54.0	-19.9	3.85 V	330	18.8	15.3
5	20085.00	38.2 PK	74.0	-35.8	2.86 V	308	41.7	-3.5
6	20085.00	25.2 AV	54.0	-28.8	2.86 V	308	28.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.6 PK			1.15 H	349	107.6	7.0
2	*6855.00	102.3 AV			1.15 H	349	95.3	7.0
3	#13710.00	47.1 PK	88.2	-41.1	2.04 H	301	30.8	16.3
4	#13710.00	35.0 AV	68.2	-33.2	2.04 H	301	18.7	16.3
5	20565.00	36.6 PK	74.0	-37.4	3.64 H	143	39.9	-3.3
6	20565.00	24.8 AV	54.0	-29.2	3.64 H	143	28.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.8 PK			2.61 V	26	106.8	7.0
2	*6855.00	102.6 AV			2.61 V	26	95.6	7.0
3	#13710.00	46.4 PK	88.2	-41.8	3.78 V	342	30.1	16.3
4	#13710.00	33.9 AV	68.2	-34.3	3.78 V	342	17.6	16.3
5	20565.00	38.9 PK	74.0	-35.1	2.85 V	293	42.2	-3.3
6	20565.00	25.6 AV	54.0	-28.4	2.85 V	293	28.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.8 PK			1.14 H	337	108.7	7.1
2	*6875.00	103.3 AV			1.14 H	337	96.2	7.1
3	#13750.00	47.6 PK	88.2	-40.6	2.05 H	320	31.5	16.1
4	#13750.00	35.4 AV	68.2	-32.8	2.05 H	320	19.3	16.1
5	20625.00	36.8 PK	74.0	-37.2	3.63 H	140	40.1	-3.3
6	20625.00	25.1 AV	54.0	-28.9	3.63 H	140	28.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.7 PK			2.69 V	6	106.6	7.1
2	*6875.00	102.7 AV			2.69 V	6	95.6	7.1
3	#13750.00	46.2 PK	88.2	-42.0	3.80 V	337	30.1	16.1
4	#13750.00	33.9 AV	68.2	-34.3	3.80 V	337	17.8	16.1
5	20625.00	38.5 PK	74.0	-35.5	2.88 V	295	41.8	-3.3
6	20625.00	25.5 AV	54.0	-28.5	2.88 V	295	28.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	114.6 PK			1.14 H	352	106.7	7.9
2	*6995.00	102.4 AV			1.14 H	352	94.5	7.9
3	#13990.00	47.2 PK	88.2	-41.0	2.12 H	307	30.5	16.7
4	#13990.00	34.9 AV	68.2	-33.3	2.12 H	307	18.2	16.7
5	20985.00	36.7 PK	74.0	-37.3	3.62 H	139	39.5	-2.8
6	20985.00	25.2 AV	54.0	-28.8	3.62 H	139	28.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	113.1 PK			2.68 V	13	105.2	7.9
2	*6995.00	102.0 AV			2.68 V	13	94.1	7.9
3	#13990.00	46.9 PK	88.2	-41.3	3.78 V	340	30.2	16.7
4	#13990.00	34.1 AV	68.2	-34.1	3.78 V	340	17.4	16.7
5	20985.00	38.9 PK	74.0	-35.1	2.87 V	312	41.7	-2.8
6	20985.00	25.7 AV	54.0	-28.3	2.87 V	312	28.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.8 PK			1.01 H	360	94.8	9.0
2	*7115.00	92.8 AV			1.01 H	360	83.8	9.0
3	#7125.00	84.3 PK	88.2	-3.9	1.01 H	360	75.3	9.0
4	#7125.00	61.9 AV	68.2	-6.3	1.01 H	360	52.9	9.0
5	7250.00	55.0 PK	74.0	-19.0	1.01 H	360	45.7	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.01 H	360	34.7	9.3
7	#14230.00	48.2 PK	88.2	-40.0	2.10 H	307	31.3	16.9
8	#14230.00	35.7 AV	68.2	-32.5	2.10 H	307	18.8	16.9
9	21345.00	36.9 PK	74.0	-37.1	3.59 H	134	38.5	-1.6
10	21345.00	24.8 AV	54.0	-29.2	3.59 H	134	26.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	105.3 PK			1.97 V	46	96.3	9.0
2	*7115.00	94.6 AV			1.97 V	46	85.6	9.0
3	#7125.00	86.6 PK	88.2	-1.6	1.97 V	46	77.6	9.0
4	#7125.00	64.2 AV	68.2	-4.0	1.97 V	46	55.2	9.0
5	7250.00	56.5 PK	74.0	-17.5	1.97 V	46	47.2	9.3
6	7250.00	44.1 AV	54.0	-9.9	1.97 V	46	34.8	9.3
7	#14230.00	46.8 PK	88.2	-41.4	3.79 V	359	29.9	16.9
8	#14230.00	34.1 AV	68.2	-34.1	3.79 V	359	17.2	16.9
9	21345.00	38.2 PK	74.0	-35.8	2.81 V	304	39.8	-1.6
10	21345.00	24.8 AV	54.0	-29.2	2.81 V	304	26.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.8 PK	88.2	-8.4	1.06 H	330	75.4	4.4
2	#5925.00	66.6 AV	68.2	-1.6	1.06 H	330	62.2	4.4
3	*5965.00	108.5 PK			1.06 H	330	104.0	4.5
4	*5965.00	96.9 AV			1.06 H	330	92.4	4.5
5	11930.00	47.0 PK	74.0	-27.0	2.08 H	290	33.3	13.7
6	11930.00	35.0 AV	54.0	-19.0	2.08 H	290	21.3	13.7
7	17895.00	36.3 PK	74.0	-37.7	3.56 H	139	11.4	24.9
8	17895.00	24.8 AV	54.0	-29.2	3.56 H	139	-0.1	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.5 PK	88.2	-14.7	2.67 V	324	69.1	4.4
2	#5925.00	63.4 AV	68.2	-4.8	2.67 V	324	59.0	4.4
3	*5965.00	104.8 PK			2.67 V	324	100.3	4.5
4	*5965.00	95.3 AV			2.67 V	324	90.8	4.5
5	11930.00	46.8 PK	74.0	-27.2	3.78 V	340	33.1	13.7
6	11930.00	34.0 AV	54.0	-20.0	3.78 V	340	20.3	13.7
7	17895.00	38.6 PK	74.0	-35.4	2.84 V	303	13.7	24.9
8	17895.00	25.3 AV	54.0	-28.7	2.84 V	303	0.4	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.2 PK			1.01 H	350	107.3	4.9
2	*6205.00	100.2 AV			1.01 H	350	95.3	4.9
3	12410.00	47.9 PK	74.0	-26.1	2.10 H	314	34.1	13.8
4	12410.00	35.8 AV	54.0	-18.2	2.10 H	314	22.0	13.8
5	18615.00	36.3 PK	74.0	-37.7	3.58 H	144	41.2	-4.9
6	18615.00	24.7 AV	54.0	-29.3	3.58 H	144	29.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.0 PK			2.80 V	20	107.1	4.9
2	*6205.00	99.5 AV			2.80 V	20	94.6	4.9
3	12410.00	46.9 PK	74.0	-27.1	3.85 V	352	33.1	13.8
4	12410.00	34.2 AV	54.0	-19.8	3.85 V	352	20.4	13.8
5	18615.00	38.5 PK	74.0	-35.5	2.83 V	302	43.4	-4.9
6	18615.00	25.7 AV	54.0	-28.3	2.83 V	302	30.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.1 PK			1.00 H	345	105.9	6.2
2	*6405.00	99.8 AV			1.00 H	345	93.6	6.2
3	#12810.00	48.1 PK	88.2	-40.1	2.02 H	318	33.7	14.4
4	#12810.00	35.6 AV	68.2	-32.6	2.02 H	318	21.2	14.4
5	19215.00	37.4 PK	74.0	-36.6	3.53 H	150	41.1	-3.7
6	19215.00	25.5 AV	54.0	-28.5	3.53 H	150	29.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.2 PK			2.82 V	15	106.0	6.2
2	*6405.00	99.9 AV			2.82 V	15	93.7	6.2
3	#12810.00	46.8 PK	88.2	-41.4	3.90 V	349	32.4	14.4
4	#12810.00	34.1 AV	68.2	-34.1	3.90 V	349	19.7	14.4
5	19215.00	38.1 PK	74.0	-35.9	2.88 V	296	41.8	-3.7
6	19215.00	25.2 AV	54.0	-28.8	2.88 V	296	28.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.5 PK			1.02 H	342	106.3	6.2
2	*6445.00	100.5 AV			1.02 H	342	94.3	6.2
3	#12890.00	47.8 PK	88.2	-40.4	2.03 H	307	33.1	14.7
4	#12890.00	35.6 AV	68.2	-32.6	2.03 H	307	20.9	14.7
5	19335.00	37.1 PK	74.0	-36.9	3.58 H	145	40.8	-3.7
6	19335.00	25.0 AV	54.0	-29.0	3.58 H	145	28.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.3 PK			2.80 V	20	106.1	6.2
2	*6445.00	100.0 AV			2.80 V	20	93.8	6.2
3	#12890.00	45.8 PK	88.2	-42.4	3.80 V	336	31.1	14.7
4	#12890.00	33.2 AV	68.2	-35.0	3.80 V	336	18.5	14.7
5	19335.00	38.3 PK	74.0	-35.7	2.81 V	299	42.0	-3.7
6	19335.00	25.3 AV	54.0	-28.7	2.81 V	299	29.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	111.8 PK			1.00 H	360	105.3	6.5
2	*6485.00	99.9 AV			1.00 H	360	93.4	6.5
3	#12970.00	47.0 PK	88.2	-41.2	2.10 H	293	32.4	14.6
4	#12970.00	35.0 AV	68.2	-33.2	2.10 H	293	20.4	14.6
5	19455.00	36.9 PK	74.0	-37.1	3.63 H	137	40.8	-3.9
6	19455.00	24.9 AV	54.0	-29.1	3.63 H	137	28.8	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	112.5 PK			2.85 V	30	106.0	6.5
2	*6485.00	100.0 AV			2.85 V	30	93.5	6.5
3	#12970.00	46.1 PK	88.2	-42.1	3.83 V	344	31.5	14.6
4	#12970.00	33.5 AV	68.2	-34.7	3.83 V	344	18.9	14.6
5	19455.00	38.2 PK	74.0	-35.8	2.78 V	295	42.1	-3.9
6	19455.00	25.0 AV	54.0	-29.0	2.78 V	295	28.9	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.4 PK			1.03 H	360	105.6	6.8
2	*6525.00	100.5 AV			1.03 H	360	93.7	6.8
3	#13050.00	48.1 PK	88.2	-40.1	2.02 H	291	33.5	14.6
4	#13050.00	35.5 AV	68.2	-32.7	2.02 H	291	20.9	14.6
5	19575.00	36.6 PK	74.0	-37.4	3.56 H	147	40.7	-4.1
6	19575.00	24.7 AV	54.0	-29.3	3.56 H	147	28.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.2 PK			2.75 V	30	105.4	6.8
2	*6525.00	99.4 AV			2.75 V	30	92.6	6.8
3	#13050.00	46.1 PK	88.2	-42.1	3.90 V	357	31.5	14.6
4	#13050.00	33.7 AV	68.2	-34.5	3.90 V	357	19.1	14.6
5	19575.00	38.7 PK	74.0	-35.3	2.88 V	321	42.8	-4.1
6	19575.00	25.6 AV	54.0	-28.4	2.88 V	321	29.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.5 PK			1.04 H	346	105.7	6.8
2	*6565.00	100.5 AV			1.04 H	346	93.7	6.8
3	#13130.00	47.7 PK	88.2	-40.5	2.12 H	319	33.0	14.7
4	#13130.00	35.6 AV	68.2	-32.6	2.12 H	319	20.9	14.7
5	19695.00	37.0 PK	74.0	-37.0	3.63 H	147	40.9	-3.9
6	19695.00	25.0 AV	54.0	-29.0	3.63 H	147	28.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.3 PK			2.76 V	18	105.5	6.8
2	*6565.00	99.6 AV			2.76 V	18	92.8	6.8
3	#13130.00	46.2 PK	88.2	-42.0	3.87 V	330	31.5	14.7
4	#13130.00	33.8 AV	68.2	-34.4	3.87 V	330	19.1	14.7
5	19695.00	38.2 PK	74.0	-35.8	2.78 V	301	42.1	-3.9
6	19695.00	25.4 AV	54.0	-28.6	2.78 V	301	29.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	111.9 PK			1.04 H	351	105.0	6.9
2	*6685.00	99.7 AV			1.04 H	351	92.8	6.9
3	13370.00	48.0 PK	74.0	-26.0	2.10 H	308	32.8	15.2
4	13370.00	35.7 AV	54.0	-18.3	2.10 H	308	20.5	15.2
5	20055.00	37.3 PK	74.0	-36.7	3.61 H	134	40.8	-3.5
6	20055.00	25.2 AV	54.0	-28.8	3.61 H	134	28.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	111.7 PK			2.86 V	5	104.8	6.9
2	*6685.00	99.3 AV			2.86 V	5	92.4	6.9
3	13370.00	46.4 PK	74.0	-27.6	3.79 V	357	31.2	15.2
4	13370.00	33.8 AV	54.0	-20.2	3.79 V	357	18.6	15.2
5	20055.00	38.4 PK	74.0	-35.6	2.79 V	308	41.9	-3.5
6	20055.00	25.4 AV	54.0	-28.6	2.79 V	308	28.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.3 PK			1.00 H	360	105.3	7.0
2	*6845.00	100.2 AV			1.00 H	360	93.2	7.0
3	#13690.00	47.9 PK	88.2	-40.3	2.06 H	293	31.6	16.3
4	#13690.00	35.5 AV	68.2	-32.7	2.06 H	293	19.2	16.3
5	20535.00	37.5 PK	74.0	-36.5	3.55 H	148	40.7	-3.2
6	20535.00	25.2 AV	54.0	-28.8	3.55 H	148	28.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	111.8 PK			2.84 V	21	104.8	7.0
2	*6845.00	99.6 AV			2.84 V	21	92.6	7.0
3	#13690.00	46.7 PK	88.2	-41.5	3.83 V	335	30.4	16.3
4	#13690.00	34.1 AV	68.2	-34.1	3.83 V	335	17.8	16.3
5	20535.00	38.3 PK	74.0	-35.7	2.81 V	321	41.5	-3.2
6	20535.00	25.5 AV	54.0	-28.5	2.81 V	321	28.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.5 PK			1.02 H	360	105.4	7.1
2	*6885.00	100.4 AV			1.02 H	360	93.3	7.1
3	#13770.00	47.4 PK	88.2	-40.8	2.12 H	298	31.5	15.9
4	#13770.00	35.3 AV	68.2	-32.9	2.12 H	298	19.4	15.9
5	20655.00	37.9 PK	74.0	-36.1	3.64 H	124	41.2	-3.3
6	20655.00	25.6 AV	54.0	-28.4	3.64 H	124	28.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	111.6 PK			2.85 V	27	104.5	7.1
2	*6885.00	99.3 AV			2.85 V	27	92.2	7.1
3	#13770.00	46.0 PK	88.2	-42.2	3.85 V	354	30.1	15.9
4	#13770.00	33.4 AV	68.2	-34.8	3.85 V	354	17.5	15.9
5	20655.00	38.0 PK	74.0	-36.0	2.77 V	296	41.3	-3.3
6	20655.00	24.7 AV	54.0	-29.3	2.77 V	296	28.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	112.2 PK			1.00 H	360	104.5	7.7
2	*6965.00	100.3 AV			1.00 H	360	92.6	7.7
3	#13930.00	48.0 PK	88.2	-40.2	2.15 H	305	31.5	16.5
4	#13930.00	35.5 AV	68.2	-32.7	2.15 H	305	19.0	16.5
5	20895.00	36.9 PK	74.0	-37.1	3.63 H	141	39.6	-2.7
6	20895.00	24.7 AV	54.0	-29.3	3.63 H	141	27.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	111.9 PK			2.81 V	19	104.2	7.7
2	*6965.00	99.2 AV			2.81 V	19	91.5	7.7
3	#13930.00	45.9 PK	88.2	-42.3	3.78 V	328	29.4	16.5
4	#13930.00	33.5 AV	68.2	-34.7	3.78 V	328	17.0	16.5
5	20895.00	38.7 PK	74.0	-35.3	2.86 V	295	41.4	-2.7
6	20895.00	25.4 AV	54.0	-28.6	2.86 V	295	28.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.3 PK			1.02 H	360	102.6	8.7
2	*7085.00	99.1 AV			1.02 H	360	90.4	8.7
3	#7125.00	78.7 PK	88.2	-9.5	1.02 H	360	69.7	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.02 H	360	57.5	9.0
5	7250.00	56.4 PK	74.0	-17.6	1.02 H	360	47.1	9.3
6	7250.00	44.2 AV	54.0	-9.8	1.02 H	360	34.9	9.3
7	#14170.00	48.1 PK	88.2	-40.1	2.11 H	295	31.6	16.5
8	#14170.00	35.9 AV	68.2	-32.3	2.11 H	295	19.4	16.5
9	21255.00	36.8 PK	74.0	-37.2	3.58 H	156	38.2	-1.4
10	21255.00	24.8 AV	54.0	-29.2	3.58 H	156	26.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.9 PK			1.86 V	24	100.2	8.7
2	*7085.00	98.5 AV			1.86 V	24	89.8	8.7
3	#7125.00	77.9 PK	88.2	-10.3	1.86 V	24	68.9	9.0
4	#7125.00	66.3 AV	68.2	-1.9	1.86 V	24	57.3	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.86 V	24	46.1	9.3
6	7250.00	44.4 AV	54.0	-9.6	1.86 V	24	35.1	9.3
7	#14170.00	45.8 PK	88.2	-42.4	3.80 V	332	29.3	16.5
8	#14170.00	33.3 AV	68.2	-34.9	3.80 V	332	16.8	16.5
9	21255.00	38.7 PK	74.0	-35.3	2.81 V	303	40.1	-1.4
10	21255.00	25.6 AV	54.0	-28.4	2.81 V	303	27.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.00 H	331	74.6	4.4
2	#5925.00	66.5 AV	68.2	-1.7	1.00 H	331	62.1	4.4
3	*5985.00	105.1 PK			1.00 H	331	100.5	4.6
4	*5985.00	93.6 AV			1.00 H	331	89.0	4.6
5	11970.00	48.5 PK	74.0	-25.5	2.08 H	312	34.7	13.8
6	11970.00	35.9 AV	54.0	-18.1	2.08 H	312	22.1	13.8
7	17955.00	38.0 PK	74.0	-36.0	3.58 H	120	11.3	26.7
8	17955.00	25.6 AV	54.0	-28.4	3.58 H	120	-1.1	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.52 V	277	69.3	4.4
2	#5925.00	62.2 AV	68.2	-6.0	1.52 V	277	57.8	4.4
3	*5985.00	101.3 PK			1.52 V	277	96.7	4.6
4	*5985.00	90.3 AV			1.52 V	277	85.7	4.6
5	11970.00	46.7 PK	74.0	-27.3	3.80 V	350	32.9	13.8
6	11970.00	34.0 AV	54.0	-20.0	3.80 V	350	20.2	13.8
7	17955.00	38.2 PK	74.0	-35.8	2.82 V	317	11.5	26.7
8	17955.00	25.2 AV	54.0	-28.8	2.82 V	317	-1.5	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.6 PK			1.00 H	350	104.4	5.2
2	*6225.00	96.9 AV			1.00 H	350	91.7	5.2
3	12450.00	47.2 PK	74.0	-26.8	2.07 H	305	33.5	13.7
4	12450.00	35.2 AV	54.0	-18.8	2.07 H	305	21.5	13.7
5	18675.00	37.1 PK	74.0	-36.9	3.58 H	123	42.0	-4.9
6	18675.00	24.7 AV	54.0	-29.3	3.58 H	123	29.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	108.5 PK			2.77 V	23	103.3	5.2
2	*6225.00	96.7 AV			2.77 V	23	91.5	5.2
3	12450.00	46.8 PK	74.0	-27.2	3.84 V	329	33.1	13.7
4	12450.00	33.9 AV	54.0	-20.1	3.84 V	329	20.2	13.7
5	18675.00	38.1 PK	74.0	-35.9	2.86 V	315	43.0	-4.9
6	18675.00	25.1 AV	54.0	-28.9	2.86 V	315	30.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.1 PK			1.00 H	356	104.0	6.1
2	*6385.00	97.3 AV			1.00 H	356	91.2	6.1
3	#12770.00	47.4 PK	88.2	-40.8	2.08 H	298	33.1	14.3
4	#12770.00	35.4 AV	68.2	-32.8	2.08 H	298	21.1	14.3
5	19155.00	37.5 PK	74.0	-36.5	3.65 H	149	41.3	-3.8
6	19155.00	25.3 AV	54.0	-28.7	3.65 H	149	29.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.6 PK			2.78 V	29	102.5	6.1
2	*6385.00	97.0 AV			2.78 V	29	90.9	6.1
3	#12770.00	46.9 PK	88.2	-41.3	3.81 V	358	32.6	14.3
4	#12770.00	34.1 AV	68.2	-34.1	3.81 V	358	19.8	14.3
5	19155.00	38.3 PK	74.0	-35.7	2.82 V	314	42.1	-3.8
6	19155.00	25.0 AV	54.0	-29.0	2.82 V	314	28.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.0 PK			1.00 H	343	103.7	6.3
2	*6465.00	97.4 AV			1.00 H	343	91.1	6.3
3	#12930.00	47.4 PK	88.2	-40.8	2.12 H	323	32.6	14.8
4	#12930.00	35.3 AV	68.2	-32.9	2.12 H	323	20.5	14.8
5	19395.00	37.6 PK	74.0	-36.4	3.62 H	128	41.3	-3.7
6	19395.00	25.5 AV	54.0	-28.5	3.62 H	128	29.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.5 PK			2.73 V	24	102.2	6.3
2	*6465.00	96.5 AV			2.73 V	24	90.2	6.3
3	#12930.00	46.0 PK	88.2	-42.2	3.88 V	339	31.2	14.8
4	#12930.00	33.6 AV	68.2	-34.6	3.88 V	339	18.8	14.8
5	19395.00	38.1 PK	74.0	-35.9	2.87 V	320	41.8	-3.7
6	19395.00	24.9 AV	54.0	-29.1	2.87 V	320	28.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.4 PK			1.06 H	358	102.5	6.9
2	*6545.00	96.6 AV			1.06 H	358	89.7	6.9
3	#13090.00	47.8 PK	88.2	-40.4	2.16 H	309	33.2	14.6
4	#13090.00	35.3 AV	68.2	-32.9	2.16 H	309	20.7	14.6
5	19635.00	37.8 PK	74.0	-36.2	3.61 H	133	41.8	-4.0
6	19635.00	25.5 AV	54.0	-28.5	3.61 H	133	29.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.4 PK			2.75 V	16	101.5	6.9
2	*6545.00	96.6 AV			2.75 V	16	89.7	6.9
3	#13090.00	46.3 PK	88.2	-41.9	3.84 V	360	31.7	14.6
4	#13090.00	33.6 AV	68.2	-34.6	3.84 V	360	19.0	14.6
5	19635.00	39.0 PK	74.0	-35.0	2.87 V	297	43.0	-4.0
6	19635.00	25.6 AV	54.0	-28.4	2.87 V	297	29.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.2 PK			1.00 H	343	103.5	6.7
2	*6625.00	97.2 AV			1.00 H	343	90.5	6.7
3	13250.00	48.1 PK	74.0	-25.9	2.07 H	298	33.1	15.0
4	13250.00	35.8 AV	54.0	-18.2	2.07 H	298	20.8	15.0
5	19875.00	37.2 PK	74.0	-36.8	3.58 H	149	40.7	-3.5
6	19875.00	25.2 AV	54.0	-28.8	3.58 H	149	28.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	108.5 PK			2.72 V	21	101.8	6.7
2	*6625.00	96.7 AV			2.72 V	21	90.0	6.7
3	13250.00	46.6 PK	74.0	-27.4	3.83 V	329	31.6	15.0
4	13250.00	34.1 AV	54.0	-19.9	3.83 V	329	19.1	15.0
5	19875.00	37.9 PK	74.0	-36.1	2.83 V	303	41.4	-3.5
6	19875.00	25.0 AV	54.0	-29.0	2.83 V	303	28.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.3 PK			1.02 H	360	102.3	7.0
2	*6705.00	96.9 AV			1.02 H	360	89.9	7.0
3	#13410.00	48.1 PK	88.2	-40.1	2.11 H	302	32.8	15.3
4	#13410.00	36.0 AV	68.2	-32.2	2.11 H	302	20.7	15.3
5	20115.00	37.5 PK	74.0	-36.5	3.65 H	136	41.0	-3.5
6	20115.00	25.4 AV	54.0	-28.6	3.65 H	136	28.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.2 PK			2.73 V	32	101.2	7.0
2	*6705.00	96.5 AV			2.73 V	32	89.5	7.0
3	#13410.00	45.9 PK	88.2	-42.3	3.90 V	333	30.6	15.3
4	#13410.00	33.3 AV	68.2	-34.9	3.90 V	333	18.0	15.3
5	20115.00	38.6 PK	74.0	-35.4	2.82 V	320	42.1	-3.5
6	20115.00	25.7 AV	54.0	-28.3	2.82 V	320	29.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.9 PK			1.05 H	347	102.8	7.1
2	*6785.00	97.3 AV			1.05 H	347	90.2	7.1
3	#13570.00	48.0 PK	88.2	-40.2	2.13 H	319	31.7	16.3
4	#13570.00	35.5 AV	68.2	-32.7	2.13 H	319	19.2	16.3
5	20355.00	37.2 PK	74.0	-36.8	3.61 H	129	40.3	-3.1
6	20355.00	25.2 AV	54.0	-28.8	3.61 H	129	28.3	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.6 PK			2.75 V	30	101.5	7.1
2	*6785.00	96.6 AV			2.75 V	30	89.5	7.1
3	#13570.00	45.7 PK	88.2	-42.5	3.86 V	355	29.4	16.3
4	#13570.00	33.4 AV	68.2	-34.8	3.86 V	355	17.1	16.3
5	20355.00	38.5 PK	74.0	-35.5	2.87 V	319	41.6	-3.1
6	20355.00	25.7 AV	54.0	-28.3	2.87 V	319	28.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.3 PK			1.00 H	353	102.2	7.1
2	*6865.00	96.8 AV			1.00 H	353	89.7	7.1
3	#13730.00	48.3 PK	88.2	-39.9	2.09 H	313	32.2	16.1
4	#13730.00	36.0 AV	68.2	-32.2	2.09 H	313	19.9	16.1
5	20595.00	37.2 PK	74.0	-36.8	3.59 H	120	40.5	-3.3
6	20595.00	25.1 AV	54.0	-28.9	3.59 H	120	28.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.5 PK			2.73 V	10	101.4	7.1
2	*6865.00	96.5 AV			2.73 V	10	89.4	7.1
3	#13730.00	46.2 PK	88.2	-42.0	3.86 V	339	30.1	16.1
4	#13730.00	33.8 AV	68.2	-34.4	3.86 V	339	17.7	16.1
5	20595.00	38.7 PK	74.0	-35.3	2.83 V	304	42.0	-3.3
6	20595.00	26.1 AV	54.0	-27.9	2.83 V	304	29.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.7 PK			1.02 H	342	102.2	7.5
2	*6945.00	96.7 AV			1.02 H	342	89.2	7.5
3	#13890.00	47.9 PK	88.2	-40.3	2.12 H	308	31.4	16.5
4	#13890.00	35.4 AV	68.2	-32.8	2.12 H	308	18.9	16.5
5	20835.00	37.0 PK	74.0	-37.0	3.57 H	129	39.9	-2.9
6	20835.00	25.1 AV	54.0	-28.9	3.57 H	129	28.0	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	108.9 PK			2.74 V	7	101.4	7.5
2	*6945.00	97.0 AV			2.74 V	7	89.5	7.5
3	#13890.00	45.4 PK	88.2	-42.8	3.90 V	360	28.9	16.5
4	#13890.00	33.2 AV	68.2	-35.0	3.90 V	360	16.7	16.5
5	20835.00	38.0 PK	74.0	-36.0	2.82 V	330	40.9	-2.9
6	20835.00	25.3 AV	54.0	-28.7	2.82 V	330	28.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.8 PK			1.00 H	330	100.5	8.3
2	*7025.00	96.8 AV			1.00 H	330	88.5	8.3
3	#7125.00	73.2 PK	88.2	-15.0	1.00 H	330	64.2	9.0
4	#7125.00	60.3 AV	68.2	-7.9	1.00 H	330	51.3	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.00 H	330	46.8	9.3
6	7250.00	44.8 AV	54.0	-9.2	1.00 H	330	35.5	9.3
7	#14050.00	48.0 PK	88.2	-40.2	2.09 H	302	31.4	16.6
8	#14050.00	35.4 AV	68.2	-32.8	2.09 H	302	18.8	16.6
9	21075.00	37.9 PK	74.0	-36.1	3.57 H	141	40.1	-2.2
10	21075.00	25.5 AV	54.0	-28.5	3.57 H	141	27.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.5 PK			1.88 V	20	100.2	8.3
2	*7025.00	96.9 AV			1.88 V	20	88.6	8.3
3	#7125.00	74.0 PK	88.2	-14.2	1.88 V	20	65.0	9.0
4	#7125.00	59.0 AV	68.2	-9.2	1.88 V	20	50.0	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.88 V	20	46.6	9.3
6	7250.00	44.4 AV	54.0	-9.6	1.88 V	20	35.1	9.3
7	#14050.00	46.1 PK	88.2	-42.1	3.83 V	359	29.5	16.6
8	#14050.00	33.5 AV	68.2	-34.7	3.83 V	359	16.9	16.6
9	21075.00	38.2 PK	74.0	-35.8	2.83 V	326	40.4	-2.2
10	21075.00	25.3 AV	54.0	-28.7	2.83 V	326	27.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.00 H	332	73.6	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.00 H	332	61.9	4.4
3	*6025.00	102.7 PK			1.00 H	332	98.2	4.5
4	*6025.00	90.6 AV			1.00 H	332	86.1	4.5
5	12050.00	47.5 PK	74.0	-26.5	2.05 H	315	33.4	14.1
6	12050.00	35.4 AV	54.0	-18.6	2.05 H	315	21.3	14.1
7	18075.00	37.4 PK	74.0	-36.6	3.55 H	127	42.1	-4.7
8	18075.00	25.5 AV	54.0	-28.5	3.55 H	127	30.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.1 PK	88.2	-14.1	1.21 V	291	69.7	4.4
2	#5925.00	62.6 AV	68.2	-5.6	1.21 V	291	58.2	4.4
3	*6025.00	100.2 PK			1.21 V	291	95.7	4.5
4	*6025.00	88.4 AV			1.21 V	291	83.9	4.5
5	12050.00	45.3 PK	74.0	-28.7	3.88 V	352	31.2	14.1
6	12050.00	33.1 AV	54.0	-20.9	3.88 V	352	19.0	14.1
7	18075.00	38.4 PK	74.0	-35.6	2.87 V	309	43.1	-4.7
8	18075.00	25.7 AV	54.0	-28.3	2.87 V	309	30.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.1 PK			1.24 H	351	101.3	4.8
2	*6185.00	94.0 AV			1.24 H	351	89.2	4.8
3	12370.00	48.2 PK	74.0	-25.8	2.11 H	319	34.2	14.0
4	12370.00	35.7 AV	54.0	-18.3	2.11 H	319	21.7	14.0
5	18555.00	37.5 PK	74.0	-36.5	3.57 H	142	42.4	-4.9
6	18555.00	25.4 AV	54.0	-28.6	3.57 H	142	30.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	106.2 PK			2.82 V	21	101.4	4.8
2	*6185.00	93.2 AV			2.82 V	21	88.4	4.8
3	12370.00	46.0 PK	74.0	-28.0	3.83 V	352	32.0	14.0
4	12370.00	33.5 AV	54.0	-20.5	3.83 V	352	19.5	14.0
5	18555.00	38.9 PK	74.0	-35.1	2.87 V	333	43.8	-4.9
6	18555.00	26.0 AV	54.0	-28.0	2.87 V	333	30.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.0 PK			1.19 H	359	100.0	6.0
2	*6345.00	93.9 AV			1.19 H	359	87.9	6.0
3	12690.00	47.9 PK	74.0	-26.1	2.04 H	322	33.8	14.1
4	12690.00	35.6 AV	54.0	-18.4	2.04 H	322	21.5	14.1
5	19035.00	36.7 PK	74.0	-37.3	3.57 H	121	40.6	-3.9
6	19035.00	24.8 AV	54.0	-29.2	3.57 H	121	28.7	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.3 PK			2.86 V	22	100.3	6.0
2	*6345.00	93.4 AV			2.86 V	22	87.4	6.0
3	12690.00	45.9 PK	74.0	-28.1	3.87 V	356	31.8	14.1
4	12690.00	33.4 AV	54.0	-20.6	3.87 V	356	19.3	14.1
5	19035.00	38.9 PK	74.0	-35.1	2.84 V	308	42.8	-3.9
6	19035.00	26.1 AV	54.0	-27.9	2.84 V	308	30.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.6 PK			1.19 H	360	98.9	6.7
2	*6505.00	93.8 AV			1.19 H	360	87.1	6.7
3	#13010.00	48.0 PK	88.2	-40.2	2.08 H	302	33.4	14.6
4	#13010.00	35.5 AV	68.2	-32.7	2.08 H	302	20.9	14.6
5	19515.00	37.9 PK	74.0	-36.1	3.62 H	148	42.0	-4.1
6	19515.00	25.6 AV	54.0	-28.4	3.62 H	148	29.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.7 PK			2.82 V	27	99.0	6.7
2	*6505.00	93.0 AV			2.82 V	27	86.3	6.7
3	#13010.00	45.7 PK	88.2	-42.5	3.92 V	360	31.1	14.6
4	#13010.00	33.6 AV	68.2	-34.6	3.92 V	360	19.0	14.6
5	19515.00	38.3 PK	74.0	-35.7	2.90 V	305	42.4	-4.1
6	19515.00	25.5 AV	54.0	-28.5	2.90 V	305	29.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.7 PK			1.26 H	360	98.8	6.9
2	*6665.00	93.6 AV			1.26 H	360	86.7	6.9
3	13330.00	48.1 PK	74.0	-25.9	2.07 H	300	33.0	15.1
4	13330.00	35.7 AV	54.0	-18.3	2.07 H	300	20.6	15.1
5	19995.00	37.0 PK	74.0	-37.0	3.63 H	142	40.6	-3.6
6	19995.00	25.0 AV	54.0	-29.0	3.63 H	142	28.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.1 PK			2.79 V	19	98.2	6.9
2	*6665.00	92.6 AV			2.79 V	19	85.7	6.9
3	13330.00	45.6 PK	74.0	-28.4	3.83 V	360	30.5	15.1
4	13330.00	33.1 AV	54.0	-20.9	3.83 V	360	18.0	15.1
5	19995.00	38.4 PK	74.0	-35.6	2.89 V	321	42.0	-3.6
6	19995.00	25.8 AV	54.0	-28.2	2.89 V	321	29.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.2 PK			1.23 H	357	99.2	7.0
2	*6825.00	93.9 AV			1.23 H	357	86.9	7.0
3	#13650.00	47.8 PK	88.2	-40.4	2.05 H	313	31.4	16.4
4	#13650.00	35.8 AV	68.2	-32.4	2.05 H	313	19.4	16.4
5	20475.00	36.9 PK	74.0	-37.1	3.58 H	146	40.1	-3.2
6	20475.00	24.9 AV	54.0	-29.1	3.58 H	146	28.1	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.3 PK			2.81 V	15	99.3	7.0
2	*6825.00	93.0 AV			2.81 V	15	86.0	7.0
3	#13650.00	45.9 PK	88.2	-42.3	3.80 V	359	29.5	16.4
4	#13650.00	33.5 AV	68.2	-34.7	3.80 V	359	17.1	16.4
5	20475.00	38.5 PK	74.0	-35.5	2.81 V	315	41.7	-3.2
6	20475.00	25.5 AV	54.0	-28.5	2.81 V	315	28.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	26 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.4 PK			1.00 H	360	96.5	7.9
2	*6985.00	93.4 AV			1.00 H	360	85.5	7.9
3	#7125.00	77.4 PK	88.2	-10.8	1.00 H	360	68.4	9.0
4	#7125.00	64.2 AV	68.2	-4.0	1.00 H	360	55.2	9.0
5	7250.00	65.3 PK	74.0	-8.7	1.00 H	360	56.0	9.3
6	7250.00	52.5 AV	54.0	-1.5	1.00 H	360	43.2	9.3
7	#13970.00	48.4 PK	88.2	-39.8	2.07 H	312	31.7	16.7
8	#13970.00	36.0 AV	68.2	-32.2	2.07 H	312	19.3	16.7
9	20955.00	37.2 PK	74.0	-36.8	3.59 H	128	39.9	-2.7
10	20955.00	25.1 AV	54.0	-28.9	3.59 H	128	27.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.9 PK			1.94 V	19	97.0	7.9
2	*6985.00	94.1 AV			1.94 V	19	86.2	7.9
3	#7125.00	74.7 PK	88.2	-13.5	1.94 V	19	65.7	9.0
4	#7125.00	64.7 AV	68.2	-3.5	1.94 V	19	55.7	9.0
5	7250.00	63.3 PK	74.0	-10.7	1.94 V	19	54.0	9.3
6	7250.00	51.8 AV	54.0	-2.2	1.94 V	19	42.5	9.3
7	#13970.00	45.4 PK	88.2	-42.8	3.88 V	360	28.7	16.7
8	#13970.00	33.0 AV	68.2	-35.2	3.88 V	360	16.3	16.7
9	20955.00	39.0 PK	74.0	-35.0	2.90 V	311	41.7	-2.7
10	20955.00	26.1 AV	54.0	-27.9	2.90 V	311	28.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

1Tx NSS1(RU, MRU)

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	2.07 H	293	63.0	4.4
2	#5925.00	50.4 AV	68.2	-17.8	2.07 H	293	46.0	4.4
3	*5955.00	122.2 PK			2.07 H	293	117.7	4.5
4	*5955.00	113.7 AV			2.07 H	293	109.2	4.5
5	11910.00	55.1 PK	74.0	-18.9	1.55 H	327	41.4	13.7
6	11910.00	41.6 AV	54.0	-12.4	1.55 H	327	27.9	13.7
7	17865.00	62.6 PK	74.0	-11.4	1.49 H	154	38.3	24.3
8	17865.00	48.8 AV	54.0	-5.2	1.49 H	154	24.5	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.9 PK	88.2	-22.3	1.78 V	154	61.5	4.4
2	#5925.00	45.6 AV	68.2	-22.6	1.78 V	154	41.2	4.4
3	*5955.00	118.3 PK			1.78 V	154	113.8	4.5
4	*5955.00	108.7 AV			1.78 V	154	104.2	4.5
5	11910.00	57.6 PK	74.0	-16.4	1.65 V	360	43.9	13.7
6	11910.00	45.7 AV	54.0	-8.3	1.65 V	360	32.0	13.7
7	17865.00	53.4 PK	74.0	-20.6	2.05 V	16	29.1	24.3
8	17865.00	42.2 AV	54.0	-11.8	2.05 V	16	17.9	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.0 PK			1.66 H	144	114.2	4.8
2	*6195.00	110.0 AV			1.66 H	144	105.2	4.8
3	12390.00	54.9 PK	74.0	-19.1	1.55 H	319	41.0	13.9
4	12390.00	41.4 AV	54.0	-12.6	1.55 H	319	27.5	13.9
5	18585.00	62.6 PK	74.0	-11.4	1.43 H	167	67.6	-5.0
6	18585.00	48.9 AV	54.0	-5.1	1.43 H	167	53.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.2 PK			1.39 V	103	113.4	4.8
2	*6195.00	108.6 AV			1.39 V	103	103.8	4.8
3	12390.00	57.8 PK	74.0	-16.2	1.61 V	348	43.9	13.9
4	12390.00	46.0 AV	54.0	-8.0	1.61 V	348	32.1	13.9
5	18585.00	53.5 PK	74.0	-20.5	2.09 V	1	58.5	-5.0
6	18585.00	42.5 AV	54.0	-11.5	2.09 V	1	47.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.6 PK			1.72 H	136	113.4	6.2
2	*6415.00	110.4 AV			1.72 H	136	104.2	6.2
3	#12830.00	55.5 PK	88.2	-32.7	1.51 H	312	41.0	14.5
4	#12830.00	41.9 AV	68.2	-26.3	1.51 H	312	27.4	14.5
5	19245.00	62.4 PK	74.0	-11.6	1.51 H	149	66.2	-3.8
6	19245.00	48.5 AV	54.0	-5.5	1.51 H	149	52.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.3 PK			1.35 V	89	112.1	6.2
2	*6415.00	108.9 AV			1.35 V	89	102.7	6.2
3	#12830.00	57.8 PK	88.2	-30.4	1.69 V	360	43.3	14.5
4	#12830.00	45.7 AV	68.2	-22.5	1.69 V	360	31.2	14.5
5	19245.00	53.3 PK	74.0	-20.7	2.09 V	3	57.1	-3.8
6	19245.00	42.1 AV	54.0	-11.9	2.09 V	3	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.4 PK			1.61 H	129	113.2	6.2
2	*6435.00	110.2 AV			1.61 H	129	104.0	6.2
3	#12870.00	55.0 PK	88.2	-33.2	1.50 H	321	40.3	14.7
4	#12870.00	41.7 AV	68.2	-26.5	1.50 H	321	27.0	14.7
5	19305.00	62.7 PK	74.0	-11.3	1.46 H	170	66.4	-3.7
6	19305.00	48.8 AV	54.0	-5.2	1.46 H	170	52.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.9 PK			1.37 V	91	111.7	6.2
2	*6435.00	108.4 AV			1.37 V	91	102.2	6.2
3	#12870.00	57.6 PK	88.2	-30.6	1.70 V	360	42.9	14.7
4	#12870.00	45.7 AV	68.2	-22.5	1.70 V	360	31.0	14.7
5	19305.00	52.7 PK	74.0	-21.3	2.10 V	30	56.4	-3.7
6	19305.00	41.7 AV	54.0	-12.3	2.10 V	30	45.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.7 PK			1.66 H	145	112.3	6.4
2	*6475.00	109.6 AV			1.66 H	145	103.2	6.4
3	#12950.00	54.8 PK	88.2	-33.4	1.53 H	341	40.1	14.7
4	#12950.00	41.4 AV	68.2	-26.8	1.53 H	341	26.7	14.7
5	19425.00	62.6 PK	74.0	-11.4	1.43 H	155	66.4	-3.8
6	19425.00	48.9 AV	54.0	-5.1	1.43 H	155	52.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.3 PK			1.39 V	113	111.9	6.4
2	*6475.00	108.7 AV			1.39 V	113	102.3	6.4
3	#12950.00	57.4 PK	88.2	-30.8	1.71 V	360	42.7	14.7
4	#12950.00	45.3 AV	68.2	-22.9	1.71 V	360	30.6	14.7
5	19425.00	53.3 PK	74.0	-20.7	2.02 V	16	57.1	-3.8
6	19425.00	41.9 AV	54.0	-12.1	2.02 V	16	45.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.8 PK			1.69 H	149	112.1	6.7
2	*6515.00	110.1 AV			1.69 H	149	103.4	6.7
3	#13030.00	54.5 PK	88.2	-33.7	1.61 H	339	39.9	14.6
4	#13030.00	41.3 AV	68.2	-26.9	1.61 H	339	26.7	14.6
5	19545.00	62.6 PK	74.0	-11.4	1.48 H	149	66.7	-4.1
6	19545.00	49.0 AV	54.0	-5.0	1.48 H	149	53.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.2 PK			1.44 V	99	111.5	6.7
2	*6515.00	108.6 AV			1.44 V	99	101.9	6.7
3	#13030.00	58.3 PK	88.2	-29.9	1.71 V	360	43.7	14.6
4	#13030.00	46.1 AV	68.2	-22.1	1.71 V	360	31.5	14.6
5	19545.00	53.2 PK	74.0	-20.8	2.05 V	27	57.3	-4.1
6	19545.00	41.7 AV	54.0	-12.3	2.05 V	27	45.8	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.2 PK			1.66 H	136	112.4	6.8
2	*6535.00	110.0 AV			1.66 H	136	103.2	6.8
3	#13070.00	55.3 PK	88.2	-32.9	1.50 H	343	40.6	14.7
4	#13070.00	41.7 AV	68.2	-26.5	1.50 H	343	27.0	14.7
5	19605.00	62.3 PK	74.0	-11.7	1.53 H	151	66.3	-4.0
6	19605.00	48.8 AV	54.0	-5.2	1.53 H	151	52.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.8 PK			1.44 V	105	111.0	6.8
2	*6535.00	108.3 AV			1.44 V	105	101.5	6.8
3	#13070.00	57.7 PK	88.2	-30.5	1.64 V	346	43.0	14.7
4	#13070.00	45.7 AV	68.2	-22.5	1.64 V	346	31.0	14.7
5	19605.00	53.8 PK	74.0	-20.2	2.02 V	29	57.8	-4.0
6	19605.00	42.5 AV	54.0	-11.5	2.02 V	29	46.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			1.70 H	148	111.9	7.0
2	*6695.00	110.1 AV			1.70 H	148	103.1	7.0
3	13390.00	54.7 PK	74.0	-19.3	1.50 H	315	39.4	15.3
4	13390.00	41.1 AV	54.0	-12.9	1.50 H	315	25.8	15.3
5	20085.00	62.5 PK	74.0	-11.5	1.52 H	162	66.0	-3.5
6	20085.00	48.7 AV	54.0	-5.3	1.52 H	162	52.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.4 PK			1.34 V	118	111.4	7.0
2	*6695.00	109.0 AV			1.34 V	118	102.0	7.0
3	13390.00	57.6 PK	74.0	-16.4	1.69 V	348	42.3	15.3
4	13390.00	45.9 AV	54.0	-8.1	1.69 V	348	30.6	15.3
5	20085.00	54.0 PK	74.0	-20.0	2.04 V	17	57.5	-3.5
6	20085.00	42.5 AV	54.0	-11.5	2.04 V	17	46.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.68 H	143	111.8	7.0
2	*6855.00	110.0 AV			1.68 H	143	103.0	7.0
3	#13710.00	55.6 PK	88.2	-32.6	1.54 H	317	39.3	16.3
4	#13710.00	41.8 AV	68.2	-26.4	1.54 H	317	25.5	16.3
5	20565.00	62.4 PK	74.0	-11.6	1.45 H	168	65.7	-3.3
6	20565.00	48.5 AV	54.0	-5.5	1.45 H	168	51.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.5 PK			1.43 V	103	111.5	7.0
2	*6855.00	108.7 AV			1.43 V	103	101.7	7.0
3	#13710.00	57.1 PK	88.2	-31.1	1.68 V	360	40.8	16.3
4	#13710.00	45.4 AV	68.2	-22.8	1.68 V	360	29.1	16.3
5	20565.00	53.7 PK	74.0	-20.3	2.01 V	19	57.0	-3.3
6	20565.00	42.5 AV	54.0	-11.5	2.01 V	19	45.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.1 PK			1.68 H	153	112.0	7.1
2	*6875.00	110.2 AV			1.68 H	153	103.1	7.1
3	#13750.00	54.9 PK	88.2	-33.3	1.56 H	342	38.8	16.1
4	#13750.00	41.7 AV	68.2	-26.5	1.56 H	342	25.6	16.1
5	20625.00	62.0 PK	74.0	-12.0	1.52 H	147	65.3	-3.3
6	20625.00	48.4 AV	54.0	-5.6	1.52 H	147	51.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.0 PK			1.41 V	102	110.9	7.1
2	*6875.00	108.7 AV			1.41 V	102	101.6	7.1
3	#13750.00	57.7 PK	88.2	-30.5	1.70 V	356	41.6	16.1
4	#13750.00	45.6 AV	68.2	-22.6	1.70 V	356	29.5	16.1
5	20625.00	54.1 PK	74.0	-19.9	2.09 V	1	57.4	-3.3
6	20625.00	42.7 AV	54.0	-11.3	2.09 V	1	46.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.9 PK			1.63 H	138	111.0	7.9
2	*6995.00	110.1 AV			1.63 H	138	102.2	7.9
3	#13990.00	54.7 PK	88.2	-33.5	1.55 H	329	38.0	16.7
4	#13990.00	41.2 AV	68.2	-27.0	1.55 H	329	24.5	16.7
5	20985.00	62.6 PK	74.0	-11.4	1.44 H	169	65.4	-2.8
6	20985.00	48.7 AV	54.0	-5.3	1.44 H	169	51.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.6 PK			1.37 V	106	109.7	7.9
2	*6995.00	108.2 AV			1.37 V	106	100.3	7.9
3	#13990.00	57.8 PK	88.2	-30.4	1.69 V	357	41.1	16.7
4	#13990.00	46.1 AV	68.2	-22.1	1.69 V	357	29.4	16.7
5	20985.00	52.9 PK	74.0	-21.1	2.05 V	8	55.7	-2.8
6	20985.00	41.9 AV	54.0	-12.1	2.05 V	8	44.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.6 PK			1.70 H	150	92.6	9.0
2	*7115.00	91.7 AV			1.70 H	150	82.7	9.0
3	#7125.00	86.3 PK	88.2	-1.9	1.70 H	150	77.3	9.0
4	#7125.00	59.7 AV	68.2	-8.5	1.70 H	150	50.7	9.0
5	7250.00	56.9 PK	74.0	-17.1	1.70 H	150	47.6	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.70 H	150	34.7	9.3
7	#14230.00	54.6 PK	88.2	-33.6	1.58 H	336	37.7	16.9
8	#14230.00	41.2 AV	68.2	-27.0	1.58 H	336	24.3	16.9
9	21345.00	62.4 PK	74.0	-11.6	1.49 H	145	64.0	-1.6
10	21345.00	48.7 AV	54.0	-5.3	1.49 H	145	50.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.7 PK			1.75 V	191	86.7	9.0
2	*7115.00	85.5 AV			1.75 V	191	76.5	9.0
3	#7125.00	82.5 PK	88.2	-5.7	1.75 V	191	73.5	9.0
4	#7125.00	54.9 AV	68.2	-13.3	1.75 V	191	45.9	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.75 V	191	46.6	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.75 V	191	34.7	9.3
7	#14230.00	57.6 PK	88.2	-30.6	1.64 V	348	40.7	16.9
8	#14230.00	45.6 AV	68.2	-22.6	1.64 V	348	28.7	16.9
9	21345.00	53.7 PK	74.0	-20.3	2.02 V	19	55.3	-1.6
10	21345.00	42.6 AV	54.0	-11.4	2.02 V	19	44.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.7 PK	88.2	-17.5	3.30 H	294	66.3	4.4
2	#5925.00	49.2 AV	68.2	-19.0	3.30 H	294	44.8	4.4
3	*5955.00	119.7 PK			3.30 H	294	115.2	4.5
4	*5955.00	109.8 AV			3.30 H	294	105.3	4.5
5	11910.00	53.9 PK	74.0	-20.1	1.61 H	327	40.2	13.7
6	11910.00	41.8 AV	54.0	-12.2	1.61 H	327	28.1	13.7
7	17865.00	62.2 PK	74.0	-11.8	1.50 H	155	37.9	24.3
8	17865.00	49.7 AV	54.0	-4.3	1.50 H	155	25.4	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.2 PK	88.2	-21.0	1.32 V	105	62.8	4.4
2	#5925.00	45.5 AV	68.2	-22.7	1.32 V	105	41.1	4.4
3	*5955.00	115.0 PK			1.32 V	105	110.5	4.5
4	*5955.00	104.9 AV			1.32 V	105	100.4	4.5
5	11910.00	57.4 PK	74.0	-16.6	1.63 V	357	43.7	13.7
6	11910.00	45.6 AV	54.0	-8.4	1.63 V	357	31.9	13.7
7	17865.00	53.4 PK	74.0	-20.6	2.01 V	12	29.1	24.3
8	17865.00	42.0 AV	54.0	-12.0	2.01 V	12	17.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.7 PK			1.50 H	145	113.9	4.8
2	*6195.00	107.6 AV			1.50 H	145	102.8	4.8
3	12390.00	54.5 PK	74.0	-19.5	1.64 H	319	40.6	13.9
4	12390.00	42.2 AV	54.0	-11.8	1.64 H	319	28.3	13.9
5	18585.00	62.3 PK	74.0	-11.7	1.52 H	156	67.3	-5.0
6	18585.00	49.6 AV	54.0	-4.4	1.52 H	156	54.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.4 PK			1.40 V	104	112.6	4.8
2	*6195.00	106.8 AV			1.40 V	104	102.0	4.8
3	12390.00	58.2 PK	74.0	-15.8	1.61 V	360	44.3	13.9
4	12390.00	46.2 AV	54.0	-7.8	1.61 V	360	32.3	13.9
5	18585.00	53.7 PK	74.0	-20.3	2.08 V	29	58.7	-5.0
6	18585.00	42.3 AV	54.0	-11.7	2.08 V	29	47.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.3 PK			1.54 H	135	112.1	6.2
2	*6415.00	107.2 AV			1.54 H	135	101.0	6.2
3	#12830.00	53.9 PK	88.2	-34.3	1.61 H	334	39.4	14.5
4	#12830.00	41.8 AV	68.2	-26.4	1.61 H	334	27.3	14.5
5	19245.00	62.0 PK	74.0	-12.0	1.51 H	163	65.8	-3.8
6	19245.00	49.8 AV	54.0	-4.2	1.51 H	163	53.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.0 PK			1.37 V	92	110.8	6.2
2	*6415.00	106.4 AV			1.37 V	92	100.2	6.2
3	#12830.00	57.2 PK	88.2	-31.0	1.60 V	349	42.7	14.5
4	#12830.00	45.5 AV	68.2	-22.7	1.60 V	349	31.0	14.5
5	19245.00	53.4 PK	74.0	-20.6	2.04 V	5	57.2	-3.8
6	19245.00	42.2 AV	54.0	-11.8	2.04 V	5	46.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	118.6 PK			1.46 H	135	112.4	6.2
2	*6435.00	107.3 AV			1.46 H	135	101.1	6.2
3	#12870.00	54.5 PK	88.2	-33.7	1.60 H	316	39.8	14.7
4	#12870.00	42.2 AV	68.2	-26.0	1.60 H	316	27.5	14.7
5	19305.00	61.9 PK	74.0	-12.1	1.47 H	163	65.6	-3.7
6	19305.00	49.6 AV	54.0	-4.4	1.47 H	163	53.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.5 PK			1.44 V	116	111.3	6.2
2	*6435.00	106.9 AV			1.44 V	116	100.7	6.2
3	#12870.00	57.8 PK	88.2	-30.4	1.60 V	360	43.1	14.7
4	#12870.00	45.8 AV	68.2	-22.4	1.60 V	360	31.1	14.7
5	19305.00	52.9 PK	74.0	-21.1	2.04 V	23	56.6	-3.7
6	19305.00	41.9 AV	54.0	-12.1	2.04 V	23	45.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.4 PK			1.50 H	152	112.0	6.4
2	*6475.00	107.5 AV			1.50 H	152	101.1	6.4
3	#12950.00	54.1 PK	88.2	-34.1	1.56 H	330	39.4	14.7
4	#12950.00	41.8 AV	68.2	-26.4	1.56 H	330	27.1	14.7
5	19425.00	62.1 PK	74.0	-11.9	1.52 H	169	65.9	-3.8
6	19425.00	49.8 AV	54.0	-4.2	1.52 H	169	53.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.39 V	91	110.7	6.4
2	*6475.00	106.7 AV			1.39 V	91	100.3	6.4
3	#12950.00	57.3 PK	88.2	-30.9	1.69 V	351	42.6	14.7
4	#12950.00	45.6 AV	68.2	-22.6	1.69 V	351	30.9	14.7
5	19425.00	53.6 PK	74.0	-20.4	1.99 V	28	57.4	-3.8
6	19425.00	42.6 AV	54.0	-11.4	1.99 V	28	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.7 PK			1.55 H	151	112.0	6.7
2	*6515.00	107.9 AV			1.55 H	151	101.2	6.7
3	#13030.00	54.1 PK	88.2	-34.1	1.57 H	334	39.5	14.6
4	#13030.00	42.2 AV	68.2	-26.0	1.57 H	334	27.6	14.6
5	19545.00	62.3 PK	74.0	-11.7	1.48 H	142	66.4	-4.1
6	19545.00	49.9 AV	54.0	-4.1	1.48 H	142	54.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.4 PK			1.38 V	119	110.7	6.7
2	*6515.00	106.8 AV			1.38 V	119	100.1	6.7
3	#13030.00	57.6 PK	88.2	-30.6	1.63 V	360	43.0	14.6
4	#13030.00	45.5 AV	68.2	-22.7	1.63 V	360	30.9	14.6
5	19545.00	52.8 PK	74.0	-21.2	2.07 V	30	56.9	-4.1
6	19545.00	41.9 AV	54.0	-12.1	2.07 V	30	46.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.5 PK			1.47 H	153	111.7	6.8
2	*6535.00	107.5 AV			1.47 H	153	100.7	6.8
3	#13070.00	53.4 PK	88.2	-34.8	1.64 H	331	38.7	14.7
4	#13070.00	41.6 AV	68.2	-26.6	1.64 H	331	26.9	14.7
5	19605.00	62.3 PK	74.0	-11.7	1.52 H	169	66.3	-4.0
6	19605.00	49.9 AV	54.0	-4.1	1.52 H	169	53.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.4 PK			1.43 V	99	110.6	6.8
2	*6535.00	106.5 AV			1.43 V	99	99.7	6.8
3	#13070.00	58.2 PK	88.2	-30.0	1.61 V	348	43.5	14.7
4	#13070.00	46.0 AV	68.2	-22.2	1.61 V	348	31.3	14.7
5	19605.00	53.4 PK	74.0	-20.6	2.00 V	20	57.4	-4.0
6	19605.00	42.3 AV	54.0	-11.7	2.00 V	20	46.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.3 PK			1.50 H	157	112.3	7.0
2	*6695.00	108.1 AV			1.50 H	157	101.1	7.0
3	13390.00	53.5 PK	74.0	-20.5	1.63 H	343	38.2	15.3
4	13390.00	41.5 AV	54.0	-12.5	1.63 H	343	26.2	15.3
5	20085.00	61.8 PK	74.0	-12.2	1.46 H	167	65.3	-3.5
6	20085.00	49.5 AV	54.0	-4.5	1.46 H	167	53.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.9 PK			1.41 V	115	110.9	7.0
2	*6695.00	107.1 AV			1.41 V	115	100.1	7.0
3	13390.00	58.1 PK	74.0	-15.9	1.66 V	358	42.8	15.3
4	13390.00	46.0 AV	54.0	-8.0	1.66 V	358	30.7	15.3
5	20085.00	53.7 PK	74.0	-20.3	2.08 V	25	57.2	-3.5
6	20085.00	42.5 AV	54.0	-11.5	2.08 V	25	46.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.9 PK			1.51 H	142	111.9	7.0
2	*6855.00	107.8 AV			1.51 H	142	100.8	7.0
3	#13710.00	54.1 PK	88.2	-34.1	1.57 H	335	37.8	16.3
4	#13710.00	42.0 AV	68.2	-26.2	1.57 H	335	25.7	16.3
5	20565.00	62.3 PK	74.0	-11.7	1.49 H	167	65.6	-3.3
6	20565.00	49.7 AV	54.0	-4.3	1.49 H	167	53.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.38 V	88	110.8	7.0
2	*6855.00	107.1 AV			1.38 V	88	100.1	7.0
3	#13710.00	57.6 PK	88.2	-30.6	1.59 V	360	41.3	16.3
4	#13710.00	45.6 AV	68.2	-22.6	1.59 V	360	29.3	16.3
5	20565.00	53.4 PK	74.0	-20.6	2.00 V	19	56.7	-3.3
6	20565.00	42.5 AV	54.0	-11.5	2.00 V	19	45.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	119.1 PK			1.49 H	131	112.0	7.1
2	*6875.00	107.7 AV			1.49 H	131	100.6	7.1
3	#13750.00	53.3 PK	88.2	-34.9	1.63 H	312	37.2	16.1
4	#13750.00	41.4 AV	68.2	-26.8	1.63 H	312	25.3	16.1
5	20625.00	62.0 PK	74.0	-12.0	1.54 H	156	65.3	-3.3
6	20625.00	49.8 AV	54.0	-4.2	1.54 H	156	53.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.6 PK			1.43 V	112	110.5	7.1
2	*6875.00	106.8 AV			1.43 V	112	99.7	7.1
3	#13750.00	57.3 PK	88.2	-30.9	1.61 V	354	41.2	16.1
4	#13750.00	45.5 AV	68.2	-22.7	1.61 V	354	29.4	16.1
5	20625.00	53.2 PK	74.0	-20.8	2.09 V	16	56.5	-3.3
6	20625.00	41.8 AV	54.0	-12.2	2.09 V	16	45.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	119.2 PK			1.50 H	155	111.3	7.9
2	*6995.00	108.0 AV			1.50 H	155	100.1	7.9
3	#13990.00	54.5 PK	88.2	-33.7	1.66 H	331	37.8	16.7
4	#13990.00	42.1 AV	68.2	-26.1	1.66 H	331	25.4	16.7
5	20985.00	62.1 PK	74.0	-11.9	1.56 H	156	64.9	-2.8
6	20985.00	49.6 AV	54.0	-4.4	1.56 H	156	52.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.7 PK			1.34 V	108	109.8	7.9
2	*6995.00	107.3 AV			1.34 V	108	99.4	7.9
3	#13990.00	57.9 PK	88.2	-30.3	1.59 V	360	41.2	16.7
4	#13990.00	45.9 AV	68.2	-22.3	1.59 V	360	29.2	16.7
5	20985.00	53.0 PK	74.0	-21.0	2.00 V	15	55.8	-2.8
6	20985.00	41.9 AV	54.0	-12.1	2.00 V	15	44.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.5 PK			1.27 H	150	94.5	9.0
2	*7115.00	92.6 AV			1.27 H	150	83.6	9.0
3	#7125.00	86.7 PK	88.2	-1.5	1.27 H	150	77.7	9.0
4	#7125.00	59.9 AV	68.2	-8.3	1.27 H	150	50.9	9.0
5	7250.00	56.5 PK	74.0	-17.5	1.27 H	150	47.2	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.27 H	150	34.7	9.3
7	#14230.00	53.7 PK	88.2	-34.5	1.55 H	314	36.8	16.9
8	#14230.00	41.8 AV	68.2	-26.4	1.55 H	314	24.9	16.9
9	21345.00	62.2 PK	74.0	-11.8	1.53 H	171	63.8	-1.6
10	21345.00	49.9 AV	54.0	-4.1	1.53 H	171	51.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.77 V	191	93.2	9.0
2	*7115.00	92.3 AV			1.77 V	191	83.3	9.0
3	#7125.00	85.4 PK	88.2	-2.8	1.77 V	191	76.4	9.0
4	#7125.00	59.4 AV	68.2	-8.8	1.77 V	191	50.4	9.0
5	7250.00	56.4 PK	74.0	-17.6	1.77 V	191	47.1	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.77 V	191	34.7	9.3
7	#14230.00	58.2 PK	88.2	-30.0	1.60 V	347	41.3	16.9
8	#14230.00	46.1 AV	68.2	-22.1	1.60 V	347	29.2	16.9
9	21345.00	53.0 PK	74.0	-21.0	2.02 V	21	54.6	-1.6
10	21345.00	42.0 AV	54.0	-12.0	2.02 V	21	43.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.7 PK	88.2	-21.5	3.30 H	294	62.3	4.4
2	#5925.00	48.6 AV	68.2	-19.6	3.30 H	294	44.2	4.4
3	*5955.00	116.9 PK			3.30 H	294	112.4	4.5
4	*5955.00	107.0 AV			3.30 H	294	102.5	4.5
5	11910.00	53.1 PK	74.0	-20.9	1.59 H	327	39.4	13.7
6	11910.00	41.5 AV	54.0	-12.5	1.59 H	327	27.8	13.7
7	17865.00	60.7 PK	74.0	-13.3	1.50 H	16	36.4	24.3
8	17865.00	49.0 AV	54.0	-5.0	1.50 H	16	24.7	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.3 PK	88.2	-20.9	2.10 V	123	62.9	4.4
2	#5925.00	46.4 AV	68.2	-21.8	2.10 V	123	42.0	4.4
3	*5955.00	116.4 PK			2.10 V	123	111.9	4.5
4	*5955.00	104.6 AV			2.10 V	123	100.1	4.5
5	11910.00	57.3 PK	74.0	-16.7	1.61 V	360	43.6	13.7
6	11910.00	45.7 AV	54.0	-8.3	1.61 V	360	32.0	13.7
7	17865.00	54.0 PK	74.0	-20.0	2.10 V	16	29.7	24.3
8	17865.00	42.6 AV	54.0	-11.4	2.10 V	16	18.3	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.3 PK			1.50 H	145	111.5	4.8
2	*6195.00	104.7 AV			1.50 H	145	99.9	4.8
3	12390.00	52.9 PK	74.0	-21.1	1.53 H	312	39.0	13.9
4	12390.00	41.3 AV	54.0	-12.7	1.53 H	312	27.4	13.9
5	18585.00	61.0 PK	74.0	-13.0	1.50 H	10	66.0	-5.0
6	18585.00	49.2 AV	54.0	-4.8	1.50 H	10	54.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.7 PK			1.40 V	104	110.9	4.8
2	*6195.00	103.8 AV			1.40 V	104	99.0	4.8
3	12390.00	57.5 PK	74.0	-16.5	1.61 V	349	43.6	13.9
4	12390.00	45.9 AV	54.0	-8.1	1.61 V	349	32.0	13.9
5	18585.00	53.8 PK	74.0	-20.2	2.10 V	10	58.8	-5.0
6	18585.00	42.5 AV	54.0	-11.5	2.10 V	10	47.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.9 PK			1.50 H	150	109.7	6.2
2	*6415.00	104.4 AV			1.50 H	150	98.2	6.2
3	#12830.00	53.4 PK	88.2	-34.8	1.63 H	324	38.9	14.5
4	#12830.00	41.5 AV	68.2	-26.7	1.63 H	324	27.0	14.5
5	19245.00	60.4 PK	74.0	-13.6	1.45 H	21	64.2	-3.8
6	19245.00	48.9 AV	54.0	-5.1	1.45 H	21	52.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			1.38 V	98	108.9	6.2
2	*6415.00	103.4 AV			1.38 V	98	97.2	6.2
3	#12830.00	57.5 PK	88.2	-30.7	1.70 V	360	43.0	14.5
4	#12830.00	45.5 AV	68.2	-22.7	1.70 V	360	31.0	14.5
5	19245.00	52.8 PK	74.0	-21.2	2.00 V	27	56.6	-3.8
6	19245.00	41.8 AV	54.0	-12.2	2.00 V	27	45.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.5 PK			1.52 H	143	110.3	6.2
2	*6435.00	105.2 AV			1.52 H	143	99.0	6.2
3	#12870.00	52.5 PK	88.2	-35.7	1.58 H	331	37.8	14.7
4	#12870.00	41.0 AV	68.2	-27.2	1.58 H	331	26.3	14.7
5	19305.00	60.3 PK	74.0	-13.7	1.55 H	1	64.0	-3.7
6	19305.00	48.5 AV	54.0	-5.5	1.55 H	1	52.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.0 PK			1.45 V	113	109.8	6.2
2	*6435.00	103.8 AV			1.45 V	113	97.6	6.2
3	#12870.00	57.5 PK	88.2	-30.7	1.64 V	360	42.8	14.7
4	#12870.00	45.7 AV	68.2	-22.5	1.64 V	360	31.0	14.7
5	19305.00	53.6 PK	74.0	-20.4	2.01 V	15	57.3	-3.7
6	19305.00	42.4 AV	54.0	-11.6	2.01 V	15	46.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.8 PK			1.52 H	132	110.4	6.4
2	*6475.00	105.2 AV			1.52 H	132	98.8	6.4
3	#12950.00	53.5 PK	88.2	-34.7	1.58 H	327	38.8	14.7
4	#12950.00	42.0 AV	68.2	-26.2	1.58 H	327	27.3	14.7
5	19425.00	60.3 PK	74.0	-13.7	1.53 H	21	64.1	-3.8
6	19425.00	48.6 AV	54.0	-5.4	1.53 H	21	52.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.8 PK			1.38 V	113	109.4	6.4
2	*6475.00	104.1 AV			1.38 V	113	97.7	6.4
3	#12950.00	57.3 PK	88.2	-30.9	1.70 V	360	42.6	14.7
4	#12950.00	45.6 AV	68.2	-22.6	1.70 V	360	30.9	14.7
5	19425.00	54.0 PK	74.0	-20.0	2.09 V	31	57.8	-3.8
6	19425.00	42.6 AV	54.0	-11.4	2.09 V	31	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.9 PK			1.53 H	151	109.2	6.7
2	*6515.00	104.5 AV			1.53 H	151	97.8	6.7
3	#13030.00	52.7 PK	88.2	-35.5	1.56 H	328	38.1	14.6
4	#13030.00	41.0 AV	68.2	-27.2	1.56 H	328	26.4	14.6
5	19545.00	60.0 PK	74.0	-14.0	1.54 H	10	64.1	-4.1
6	19545.00	48.6 AV	54.0	-5.4	1.54 H	10	52.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	115.4 PK			1.44 V	95	108.7	6.7
2	*6515.00	103.6 AV			1.44 V	95	96.9	6.7
3	#13030.00	57.5 PK	88.2	-30.7	1.64 V	360	42.9	14.6
4	#13030.00	45.7 AV	68.2	-22.5	1.64 V	360	31.1	14.6
5	19545.00	53.4 PK	74.0	-20.6	2.08 V	4	57.5	-4.1
6	19545.00	42.1 AV	54.0	-11.9	2.08 V	4	46.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.7 PK			1.55 H	137	108.9	6.8
2	*6535.00	104.3 AV			1.55 H	137	97.5	6.8
3	#13070.00	52.9 PK	88.2	-35.3	1.57 H	338	38.2	14.7
4	#13070.00	41.3 AV	68.2	-26.9	1.57 H	338	26.6	14.7
5	19605.00	60.7 PK	74.0	-13.3	1.47 H	28	64.7	-4.0
6	19605.00	48.8 AV	54.0	-5.2	1.47 H	28	52.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			1.41 V	91	109.3	6.8
2	*6535.00	104.0 AV			1.41 V	91	97.2	6.8
3	#13070.00	57.6 PK	88.2	-30.6	1.70 V	360	42.9	14.7
4	#13070.00	45.5 AV	68.2	-22.7	1.70 V	360	30.8	14.7
5	19605.00	53.4 PK	74.0	-20.6	2.00 V	21	57.4	-4.0
6	19605.00	42.4 AV	54.0	-11.6	2.00 V	21	46.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.8 PK			1.46 H	130	108.8	7.0
2	*6695.00	104.4 AV			1.46 H	130	97.4	7.0
3	13390.00	53.2 PK	74.0	-20.8	1.56 H	331	37.9	15.3
4	13390.00	41.3 AV	54.0	-12.7	1.56 H	331	26.0	15.3
5	20085.00	61.2 PK	74.0	-12.8	1.48 H	27	64.7	-3.5
6	20085.00	49.2 AV	54.0	-4.8	1.48 H	27	52.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.1 PK			1.37 V	113	108.1	7.0
2	*6695.00	103.5 AV			1.37 V	113	96.5	7.0
3	13390.00	57.9 PK	74.0	-16.1	1.68 V	358	42.6	15.3
4	13390.00	46.1 AV	54.0	-7.9	1.68 V	358	30.8	15.3
5	20085.00	52.9 PK	74.0	-21.1	2.00 V	25	56.4	-3.5
6	20085.00	41.7 AV	54.0	-12.3	2.00 V	25	45.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.0 PK			1.55 H	132	109.0	7.0
2	*6855.00	104.5 AV			1.55 H	132	97.5	7.0
3	#13710.00	53.6 PK	88.2	-34.6	1.55 H	342	37.3	16.3
4	#13710.00	41.9 AV	68.2	-26.3	1.55 H	342	25.6	16.3
5	20565.00	60.8 PK	74.0	-13.2	1.46 H	10	64.1	-3.3
6	20565.00	49.0 AV	54.0	-5.0	1.46 H	10	52.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.8 PK			1.43 V	116	108.8	7.0
2	*6855.00	104.1 AV			1.43 V	116	97.1	7.0
3	#13710.00	57.6 PK	88.2	-30.6	1.70 V	359	41.3	16.3
4	#13710.00	46.0 AV	68.2	-22.2	1.70 V	359	29.7	16.3
5	20565.00	53.3 PK	74.0	-20.7	2.06 V	3	56.6	-3.3
6	20565.00	41.9 AV	54.0	-12.1	2.06 V	3	45.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.8 PK			1.48 H	136	108.7	7.1
2	*6875.00	104.5 AV			1.48 H	136	97.4	7.1
3	#13750.00	53.2 PK	88.2	-35.0	1.63 H	341	37.1	16.1
4	#13750.00	41.9 AV	68.2	-26.3	1.63 H	341	25.8	16.1
5	20625.00	60.9 PK	74.0	-13.1	1.45 H	12	64.2	-3.3
6	20625.00	49.2 AV	54.0	-4.8	1.45 H	12	52.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	115.7 PK			1.45 V	91	108.6	7.1
2	*6875.00	103.8 AV			1.45 V	91	96.7	7.1
3	#13750.00	58.3 PK	88.2	-29.9	1.64 V	358	42.2	16.1
4	#13750.00	46.2 AV	68.2	-22.0	1.64 V	358	30.1	16.1
5	20625.00	53.3 PK	74.0	-20.7	2.06 V	16	56.6	-3.3
6	20625.00	42.2 AV	54.0	-11.8	2.06 V	16	45.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.8 PK			1.56 H	155	107.9	7.9
2	*6995.00	104.2 AV			1.56 H	155	96.3	7.9
3	#13990.00	52.3 PK	88.2	-35.9	1.54 H	323	35.6	16.7
4	#13990.00	41.0 AV	68.2	-27.2	1.54 H	323	24.3	16.7
5	20985.00	60.2 PK	74.0	-13.8	1.53 H	21	63.0	-2.8
6	20985.00	48.6 AV	54.0	-5.4	1.53 H	21	51.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	115.4 PK			1.35 V	88	107.5	7.9
2	*6995.00	103.6 AV			1.35 V	88	95.7	7.9
3	#13990.00	57.3 PK	88.2	-30.9	1.65 V	345	40.6	16.7
4	#13990.00	45.4 AV	68.2	-22.8	1.65 V	345	28.7	16.7
5	20985.00	52.9 PK	74.0	-21.1	2.09 V	15	55.7	-2.8
6	20985.00	41.7 AV	54.0	-12.3	2.09 V	15	44.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.7 PK			1.50 H	148	94.7	9.0
2	*7115.00	93.4 AV			1.50 H	148	84.4	9.0
3	#7125.00	86.7 PK	88.2	-1.5	1.50 H	148	77.7	9.0
4	#7125.00	60.8 AV	68.2	-7.4	1.50 H	148	51.8	9.0
5	7250.00	55.5 PK	74.0	-18.5	1.50 H	148	46.2	9.3
6	7250.00	44.2 AV	54.0	-9.8	1.50 H	148	34.9	9.3
7	#14230.00	53.2 PK	88.2	-35.0	1.57 H	343	36.3	16.9
8	#14230.00	41.5 AV	68.2	-26.7	1.57 H	343	24.6	16.9
9	21345.00	60.6 PK	74.0	-13.4	1.45 H	32	62.2	-1.6
10	21345.00	48.9 AV	54.0	-5.1	1.45 H	32	50.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.70 V	197	93.2	9.0
2	*7115.00	91.6 AV			1.70 V	197	82.6	9.0
3	#7125.00	86.3 PK	88.2	-1.9	1.70 V	197	77.3	9.0
4	#7125.00	58.7 AV	68.2	-9.5	1.70 V	197	49.7	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.70 V	197	46.1	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.70 V	197	34.7	9.3
7	#14230.00	57.5 PK	88.2	-30.7	1.67 V	347	40.6	16.9
8	#14230.00	45.7 AV	68.2	-22.5	1.67 V	347	28.8	16.9
9	21345.00	53.6 PK	74.0	-20.4	2.08 V	13	55.2	-1.6
10	21345.00	42.5 AV	54.0	-11.5	2.08 V	13	44.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.2 PK	88.2	-16.0	2.06 H	293	67.8	4.4
2	#5925.00	46.4 AV	68.2	-21.8	2.06 H	293	42.0	4.4
3	*5955.00	121.0 PK			2.06 H	293	116.5	4.5
4	*5955.00	109.9 AV			2.06 H	293	105.4	4.5
5	11910.00	52.7 PK	74.0	-21.3	1.40 H	340	39.0	13.7
6	11910.00	41.2 AV	54.0	-12.8	1.40 H	340	27.5	13.7
7	17865.00	60.7 PK	74.0	-13.3	3.67 H	360	36.4	24.3
8	17865.00	49.1 AV	54.0	-4.9	3.67 H	360	24.8	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	2.12 V	123	63.6	4.4
2	#5925.00	43.1 AV	68.2	-25.1	2.12 V	123	38.7	4.4
3	*5955.00	116.6 PK			2.12 V	123	112.1	4.5
4	*5955.00	106.0 AV			2.12 V	123	101.5	4.5
5	11910.00	57.0 PK	74.0	-17.0	1.64 V	355	43.3	13.7
6	11910.00	45.3 AV	54.0	-8.7	1.64 V	355	31.6	13.7
7	17865.00	53.5 PK	74.0	-20.5	2.08 V	2	29.2	24.3
8	17865.00	42.3 AV	54.0	-11.7	2.08 V	2	18.0	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.4 PK			1.51 H	135	111.0	6.4
2	*6475.00	106.1 AV			1.51 H	135	99.7	6.4
3	#12950.00	52.6 PK	88.2	-35.6	1.43 H	334	37.9	14.7
4	#12950.00	41.0 AV	68.2	-27.2	1.43 H	334	26.3	14.7
5	19425.00	60.0 PK	74.0	-14.0	3.65 H	360	63.8	-3.8
6	19425.00	48.7 AV	54.0	-5.3	3.65 H	360	52.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.2 PK			1.44 V	94	109.8	6.4
2	*6475.00	104.8 AV			1.44 V	94	98.4	6.4
3	#12950.00	57.4 PK	88.2	-30.8	1.65 V	360	42.7	14.7
4	#12950.00	45.6 AV	68.2	-22.6	1.65 V	360	30.9	14.7
5	19425.00	53.5 PK	74.0	-20.5	2.07 V	29	57.3	-3.8
6	19425.00	42.0 AV	54.0	-12.0	2.07 V	29	45.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.0 PK			1.54 H	155	111.0	7.0
2	*6695.00	106.2 AV			1.54 H	155	99.2	7.0
3	13390.00	52.4 PK	74.0	-21.6	1.35 H	342	37.1	15.3
4	13390.00	40.9 AV	54.0	-13.1	1.35 H	342	25.6	15.3
5	20085.00	61.0 PK	74.0	-13.0	3.66 H	360	64.5	-3.5
6	20085.00	49.2 AV	54.0	-4.8	3.66 H	360	52.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.7 PK			1.46 V	100	108.7	7.0
2	*6695.00	104.4 AV			1.46 V	100	97.4	7.0
3	13390.00	57.8 PK	74.0	-16.2	1.59 V	360	42.5	15.3
4	13390.00	45.8 AV	54.0	-8.2	1.59 V	360	30.5	15.3
5	20085.00	53.5 PK	74.0	-20.5	2.06 V	6	57.0	-3.5
6	20085.00	42.5 AV	54.0	-11.5	2.06 V	6	46.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.2 PK			1.89 H	150	105.2	9.0
2	*7115.00	104.3 AV			1.89 H	150	95.3	9.0
3	#7125.00	83.7 PK	88.2	-4.5	1.89 H	150	74.7	9.0
4	#7125.00	66.7 AV	68.2	-1.5	1.89 H	150	57.7	9.0
5	7250.00	55.7 PK	74.0	-18.3	1.89 H	150	46.4	9.3
6	7250.00	44.3 AV	54.0	-9.7	1.89 H	150	35.0	9.3
7	#14230.00	52.5 PK	88.2	-35.7	1.37 H	332	35.6	16.9
8	#14230.00	41.0 AV	68.2	-27.2	1.37 H	332	24.1	16.9
9	21345.00	61.1 PK	74.0	-12.9	3.63 H	360	62.7	-1.6
10	21345.00	49.2 AV	54.0	-4.8	3.63 H	360	50.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	115.9 PK			1.79 V	197	106.9	9.0
2	*7115.00	103.5 AV			1.79 V	197	94.5	9.0
3	#7125.00	85.4 PK	88.2	-2.8	1.79 V	197	76.4	9.0
4	#7125.00	66.7 AV	68.2	-1.5	1.79 V	197	57.7	9.0
5	7250.00	55.8 PK	74.0	-18.2	1.79 V	197	46.5	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.79 V	197	34.7	9.3
7	#14230.00	57.3 PK	88.2	-30.9	1.69 V	360	40.4	16.9
8	#14230.00	45.3 AV	68.2	-22.9	1.69 V	360	28.4	16.9
9	21345.00	53.6 PK	74.0	-20.4	2.01 V	23	55.2	-1.6
10	21345.00	42.4 AV	54.0	-11.6	2.01 V	23	44.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.1 PK	88.2	-21.1	2.05 H	293	62.7	4.4
2	#5925.00	51.8 AV	68.2	-16.4	2.05 H	293	47.4	4.4
3	*5955.00	119.0 PK			2.05 H	293	114.5	4.5
4	*5955.00	107.6 AV			2.05 H	293	103.1	4.5
5	11910.00	52.1 PK	74.0	-21.9	1.50 H	327	38.4	13.7
6	11910.00	40.5 AV	54.0	-13.5	1.50 H	327	26.8	13.7
7	17865.00	60.2 PK	74.0	-13.8	3.66 H	360	35.9	24.3
8	17865.00	48.5 AV	54.0	-5.5	3.66 H	360	24.2	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.6 PK	88.2	-17.6	2.12 V	123	66.2	4.4
2	#5925.00	51.1 AV	68.2	-17.1	2.12 V	123	46.7	4.4
3	*5955.00	113.1 PK			2.12 V	123	108.6	4.5
4	*5955.00	103.6 AV			2.12 V	123	99.1	4.5
5	11910.00	58.2 PK	74.0	-15.8	1.64 V	360	44.5	13.7
6	11910.00	46.1 AV	54.0	-7.9	1.64 V	360	32.4	13.7
7	17865.00	53.4 PK	74.0	-20.6	1.99 V	2	29.1	24.3
8	17865.00	42.3 AV	54.0	-11.7	1.99 V	2	18.0	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.8 PK			1.50 H	159	108.4	6.4
2	*6475.00	102.8 AV			1.50 H	159	96.4	6.4
3	#12950.00	51.9 PK	88.2	-36.3	1.50 H	318	37.2	14.7
4	#12950.00	40.1 AV	68.2	-28.1	1.50 H	318	25.4	14.7
5	19425.00	60.0 PK	74.0	-14.0	3.68 H	360	63.8	-3.8
6	19425.00	48.2 AV	54.0	-5.8	3.68 H	360	52.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.0 PK			1.42 V	102	108.6	6.4
2	*6475.00	102.3 AV			1.42 V	102	95.9	6.4
3	#12950.00	57.6 PK	88.2	-30.6	1.66 V	349	42.9	14.7
4	#12950.00	45.6 AV	68.2	-22.6	1.66 V	349	30.9	14.7
5	19425.00	53.3 PK	74.0	-20.7	2.07 V	27	57.1	-3.8
6	19425.00	42.1 AV	54.0	-11.9	2.07 V	27	45.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.0 PK			1.49 H	131	109.0	7.0
2	*6695.00	103.6 AV			1.49 H	131	96.6	7.0
3	13390.00	51.4 PK	74.0	-22.6	1.49 H	317	36.1	15.3
4	13390.00	40.1 AV	54.0	-13.9	1.49 H	317	24.8	15.3
5	20085.00	60.6 PK	74.0	-13.4	3.70 H	360	64.1	-3.5
6	20085.00	48.6 AV	54.0	-5.4	3.70 H	360	52.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.3 PK			1.34 V	111	108.3	7.0
2	*6695.00	102.8 AV			1.34 V	111	95.8	7.0
3	13390.00	57.2 PK	74.0	-16.8	1.71 V	358	41.9	15.3
4	13390.00	45.6 AV	54.0	-8.4	1.71 V	358	30.3	15.3
5	20085.00	53.7 PK	74.0	-20.3	2.03 V	5	57.2	-3.5
6	20085.00	42.4 AV	54.0	-11.6	2.03 V	5	45.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.17 H	150	92.3	9.0
2	*7115.00	91.6 AV			1.17 H	150	82.6	9.0
3	#7125.00	86.2 PK	88.2	-2.0	1.17 H	150	77.2	9.0
4	#7125.00	57.8 AV	68.2	-10.4	1.17 H	150	48.8	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.17 H	150	46.7	9.3
6	7250.00	44.0 AV	54.0	-10.0	1.17 H	150	34.7	9.3
7	#14230.00	52.7 PK	88.2	-35.5	1.44 H	334	35.8	16.9
8	#14230.00	41.0 AV	68.2	-27.2	1.44 H	334	24.1	16.9
9	21345.00	60.3 PK	74.0	-13.7	3.64 H	360	61.9	-1.6
10	21345.00	48.8 AV	54.0	-5.2	3.64 H	360	50.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.8 PK			1.80 V	197	91.8	9.0
2	*7115.00	89.7 AV			1.80 V	197	80.7	9.0
3	#7125.00	82.1 PK	88.2	-6.1	1.80 V	197	73.1	9.0
4	#7125.00	56.6 AV	68.2	-11.6	1.80 V	197	47.6	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.80 V	197	46.6	9.3
6	7250.00	44.1 AV	54.0	-9.9	1.80 V	197	34.8	9.3
7	#14230.00	57.6 PK	88.2	-30.6	1.66 V	360	40.7	16.9
8	#14230.00	45.6 AV	68.2	-22.6	1.66 V	360	28.7	16.9
9	21345.00	53.1 PK	74.0	-20.9	2.09 V	7	54.7	-1.6
10	21345.00	42.0 AV	54.0	-12.0	2.09 V	7	43.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.2 PK	88.2	-6.0	1.81 H	276	77.8	4.4
2	#5925.00	66.7 AV	68.2	-1.5	1.81 H	276	62.3	4.4
3	*5985.00	108.1 PK			1.81 H	276	103.5	4.6
4	*5985.00	95.9 AV			1.81 H	276	91.3	4.6
5	11970.00	52.3 PK	74.0	-21.7	1.40 H	332	38.5	13.8
6	11970.00	40.9 AV	54.0	-13.1	1.40 H	332	27.1	13.8
7	17955.00	60.4 PK	74.0	-13.6	3.63 H	360	33.7	26.7
8	17955.00	48.7 AV	54.0	-5.3	3.63 H	360	22.0	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.2 PK	88.2	-17.0	1.30 V	213	66.8	4.4
2	#5925.00	58.7 AV	68.2	-9.5	1.30 V	213	54.3	4.4
3	*5985.00	104.7 PK			1.30 V	213	100.1	4.6
4	*5985.00	93.6 AV			1.30 V	213	89.0	4.6
5	11970.00	57.7 PK	74.0	-16.3	1.62 V	360	43.9	13.8
6	11970.00	45.6 AV	54.0	-8.4	1.62 V	360	31.8	13.8
7	17955.00	53.9 PK	74.0	-20.1	1.99 V	12	27.2	26.7
8	17955.00	42.5 AV	54.0	-11.5	1.99 V	12	15.8	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.3 PK			1.75 H	155	103.0	6.3
2	*6465.00	97.2 AV			1.75 H	155	90.9	6.3
3	#12930.00	52.7 PK	88.2	-35.5	1.35 H	350	37.9	14.8
4	#12930.00	40.9 AV	68.2	-27.3	1.35 H	350	26.1	14.8
5	19395.00	60.7 PK	74.0	-13.3	3.65 H	360	64.4	-3.7
6	19395.00	49.0 AV	54.0	-5.0	3.65 H	360	52.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.8 PK			1.43 V	117	102.5	6.3
2	*6465.00	96.1 AV			1.43 V	117	89.8	6.3
3	#12930.00	57.6 PK	88.2	-30.6	1.60 V	360	42.8	14.8
4	#12930.00	45.8 AV	68.2	-22.4	1.60 V	360	31.0	14.8
5	19395.00	53.7 PK	74.0	-20.3	2.04 V	24	57.4	-3.7
6	19395.00	42.5 AV	54.0	-11.5	2.04 V	24	46.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.0 PK			1.77 H	160	103.0	7.0
2	*6705.00	97.6 AV			1.77 H	160	90.6	7.0
3	#13410.00	53.1 PK	88.2	-35.1	1.40 H	335	37.8	15.3
4	#13410.00	41.4 AV	68.2	-26.8	1.40 H	335	26.1	15.3
5	20115.00	61.3 PK	74.0	-12.7	3.62 H	360	64.8	-3.5
6	20115.00	49.4 AV	54.0	-4.6	3.62 H	360	52.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.2 PK			1.35 V	123	102.2	7.0
2	*6705.00	96.9 AV			1.35 V	123	89.9	7.0
3	#13410.00	57.9 PK	88.2	-30.3	1.67 V	356	42.6	15.3
4	#13410.00	46.2 AV	68.2	-22.0	1.67 V	356	30.9	15.3
5	20115.00	53.6 PK	74.0	-20.4	2.04 V	14	57.1	-3.5
6	20115.00	42.3 AV	54.0	-11.7	2.04 V	14	45.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.9 PK			1.18 H	151	102.6	8.3
2	*7025.00	99.0 AV			1.18 H	151	90.7	8.3
3	#7125.00	78.4 PK	88.2	-9.8	1.18 H	151	69.4	9.0
4	#7125.00	64.8 AV	68.2	-3.4	1.18 H	151	55.8	9.0
5	7250.00	57.5 PK	74.0	-16.5	1.18 H	151	48.2	9.3
6	7250.00	45.2 AV	54.0	-8.8	1.18 H	151	35.9	9.3
7	#14050.00	52.1 PK	88.2	-36.1	1.42 H	349	35.5	16.6
8	#14050.00	40.8 AV	68.2	-27.4	1.42 H	349	24.2	16.6
9	21075.00	60.9 PK	74.0	-13.1	3.62 H	360	63.1	-2.2
10	21075.00	49.3 AV	54.0	-4.7	3.62 H	360	51.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.5 PK			1.52 V	226	99.2	8.3
2	*7025.00	97.1 AV			1.52 V	226	88.8	8.3
3	#7125.00	78.0 PK	88.2	-10.2	1.52 V	226	69.0	9.0
4	#7125.00	63.5 AV	68.2	-4.7	1.52 V	226	54.5	9.0
5	7250.00	57.1 PK	74.0	-16.9	1.52 V	226	47.8	9.3
6	7250.00	45.1 AV	54.0	-8.9	1.52 V	226	35.8	9.3
7	#14050.00	57.3 PK	88.2	-30.9	1.59 V	360	40.7	16.6
8	#14050.00	45.6 AV	68.2	-22.6	1.59 V	360	29.0	16.6
9	21075.00	53.5 PK	74.0	-20.5	2.11 V	24	55.7	-2.2
10	21075.00	42.3 AV	54.0	-11.7	2.11 V	24	44.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	1.90 H	272	73.7	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.90 H	272	61.9	4.4
3	*6025.00	105.9 PK			1.90 H	272	101.4	4.5
4	*6025.00	93.5 AV			1.90 H	272	89.0	4.5
5	12050.00	53.3 PK	74.0	-20.7	1.38 H	329	39.2	14.1
6	12050.00	41.6 AV	54.0	-12.4	1.38 H	329	27.5	14.1
7	18075.00	60.8 PK	74.0	-13.2	3.67 H	360	65.5	-4.7
8	18075.00	49.3 AV	54.0	-4.7	3.67 H	360	54.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.22 V	212	70.7	4.4
2	#5925.00	62.0 AV	68.2	-6.2	1.22 V	212	57.6	4.4
3	*6025.00	101.1 PK			1.22 V	212	96.6	4.5
4	*6025.00	89.8 AV			1.22 V	212	85.3	4.5
5	12050.00	58.2 PK	74.0	-15.8	1.66 V	360	44.1	14.1
6	12050.00	46.2 AV	54.0	-7.8	1.66 V	360	32.1	14.1
7	18075.00	53.5 PK	74.0	-20.5	2.03 V	10	58.2	-4.7
8	18075.00	42.3 AV	54.0	-11.7	2.03 V	10	47.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.1 PK			1.89 H	282	102.4	6.7
2	*6505.00	95.6 AV			1.89 H	282	88.9	6.7
3	#13010.00	52.1 PK	88.2	-36.1	1.40 H	335	37.5	14.6
4	#13010.00	40.7 AV	68.2	-27.5	1.40 H	335	26.1	14.6
5	19515.00	61.2 PK	74.0	-12.8	3.61 H	360	65.3	-4.1
6	19515.00	49.5 AV	54.0	-4.5	3.61 H	360	53.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.4 PK			1.50 V	104	98.7	6.7
2	*6505.00	93.4 AV			1.50 V	104	86.7	6.7
3	#13010.00	57.3 PK	88.2	-30.9	1.64 V	347	42.7	14.6
4	#13010.00	45.6 AV	68.2	-22.6	1.64 V	347	31.0	14.6
5	19515.00	53.4 PK	74.0	-20.6	2.11 V	28	57.5	-4.1
6	19515.00	42.4 AV	54.0	-11.6	2.11 V	28	46.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.4 PK			1.86 H	268	101.5	6.9
2	*6665.00	95.2 AV			1.86 H	268	88.3	6.9
3	13330.00	52.6 PK	74.0	-21.4	1.43 H	335	37.5	15.1
4	13330.00	41.4 AV	54.0	-12.6	1.43 H	335	26.3	15.1
5	19995.00	61.1 PK	74.0	-12.9	3.68 H	360	64.7	-3.6
6	19995.00	49.5 AV	54.0	-4.5	3.68 H	360	53.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			1.52 V	105	98.0	6.9
2	*6665.00	93.2 AV			1.52 V	105	86.3	6.9
3	13330.00	57.2 PK	74.0	-16.8	1.63 V	360	42.1	15.1
4	13330.00	45.6 AV	54.0	-8.4	1.63 V	360	30.5	15.1
5	19995.00	53.3 PK	74.0	-20.7	2.06 V	8	56.9	-3.6
6	19995.00	41.9 AV	54.0	-12.1	2.06 V	8	45.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.0 PK			1.90 H	150	98.1	7.9
2	*6985.00	95.0 AV			1.90 H	150	87.1	7.9
3	#7125.00	76.6 PK	88.2	-11.6	1.90 H	150	67.6	9.0
4	#7125.00	62.2 AV	68.2	-6.0	1.90 H	150	53.2	9.0
5	7250.00	64.2 PK	74.0	-9.8	1.90 H	150	54.9	9.3
6	7250.00	51.8 AV	54.0	-2.2	1.90 H	150	42.5	9.3
7	#13970.00	52.6 PK	88.2	-35.6	1.45 H	329	35.9	16.7
8	#13970.00	41.2 AV	68.2	-27.0	1.45 H	329	24.5	16.7
9	20955.00	60.7 PK	74.0	-13.3	3.68 H	360	63.4	-2.7
10	20955.00	48.9 AV	54.0	-5.1	3.68 H	360	51.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.3 PK			1.62 V	224	97.4	7.9
2	*6985.00	93.4 AV			1.62 V	224	85.5	7.9
3	#7125.00	73.7 PK	88.2	-14.5	1.62 V	224	64.7	9.0
4	#7125.00	61.8 AV	68.2	-6.4	1.62 V	224	52.8	9.0
5	7250.00	65.7 PK	74.0	-8.3	1.62 V	224	56.4	9.3
6	7250.00	50.9 AV	54.0	-3.1	1.62 V	224	41.6	9.3
7	#13970.00	57.5 PK	88.2	-30.7	1.64 V	360	40.8	16.7
8	#13970.00	45.8 AV	68.2	-22.4	1.64 V	360	29.1	16.7
9	20955.00	53.9 PK	74.0	-20.1	2.00 V	0	56.6	-2.7
10	20955.00	42.6 AV	54.0	-11.4	2.00 V	0	45.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.1 PK	88.2	-7.1	1.86 H	277	76.7	4.4
2	#5925.00	66.2 AV	68.2	-2.0	1.86 H	277	61.8	4.4
3	*6025.00	104.5 PK			1.86 H	277	100.0	4.5
4	*6025.00	91.8 AV			1.86 H	277	87.3	4.5
5	12050.00	52.0 PK	74.0	-22.0	1.43 H	353	37.9	14.1
6	12050.00	40.7 AV	54.0	-13.3	1.43 H	353	26.6	14.1
7	18075.00	60.6 PK	74.0	-13.4	3.68 H	360	65.3	-4.7
8	18075.00	49.0 AV	54.0	-5.0	3.68 H	360	53.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.9 PK	88.2	-10.3	2.83 V	210	73.5	4.4
2	#5925.00	63.0 AV	68.2	-5.2	2.83 V	210	58.6	4.4
3	*6025.00	100.6 PK			2.83 V	210	96.1	4.5
4	*6025.00	90.1 AV			2.83 V	210	85.6	4.5
5	12050.00	57.8 PK	74.0	-16.2	1.70 V	355	43.7	14.1
6	12050.00	45.9 AV	54.0	-8.1	1.70 V	355	31.8	14.1
7	18075.00	53.3 PK	74.0	-20.7	2.01 V	17	58.0	-4.7
8	18075.00	42.0 AV	54.0	-12.0	2.01 V	17	46.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.2 PK			1.84 H	283	101.5	6.7
2	*6505.00	96.2 AV			1.84 H	283	89.5	6.7
3	#13010.00	52.2 PK	88.2	-36.0	1.35 H	324	37.6	14.6
4	#13010.00	40.7 AV	68.2	-27.5	1.35 H	324	26.1	14.6
5	19515.00	60.2 PK	74.0	-13.8	3.67 H	360	64.3	-4.1
6	19515.00	48.7 AV	54.0	-5.3	3.67 H	360	52.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.3 PK			1.50 V	101	98.6	6.7
2	*6505.00	92.0 AV			1.50 V	101	85.3	6.7
3	#13010.00	57.3 PK	88.2	-30.9	1.59 V	345	42.7	14.6
4	#13010.00	45.6 AV	68.2	-22.6	1.59 V	345	31.0	14.6
5	19515.00	53.8 PK	74.0	-20.2	2.07 V	21	57.9	-4.1
6	19515.00	42.5 AV	54.0	-11.5	2.07 V	21	46.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.3 PK			1.84 H	280	101.4	6.9
2	*6665.00	96.4 AV			1.84 H	280	89.5	6.9
3	13330.00	52.3 PK	74.0	-21.7	1.46 H	336	37.2	15.1
4	13330.00	40.8 AV	54.0	-13.2	1.46 H	336	25.7	15.1
5	19995.00	61.1 PK	74.0	-12.9	3.73 H	360	64.7	-3.6
6	19995.00	49.4 AV	54.0	-4.6	3.73 H	360	53.0	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.3 PK			1.55 V	95	98.4	6.9
2	*6665.00	91.8 AV			1.55 V	95	84.9	6.9
3	13330.00	57.8 PK	74.0	-16.2	1.67 V	349	42.7	15.1
4	13330.00	46.0 AV	54.0	-8.0	1.67 V	349	30.9	15.1
5	19995.00	53.6 PK	74.0	-20.4	2.10 V	2	57.2	-3.6
6	19995.00	42.5 AV	54.0	-11.5	2.10 V	2	46.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.5 PK			1.92 H	151	97.6	7.9
2	*6985.00	94.6 AV			1.92 H	151	86.7	7.9
3	#7125.00	77.4 PK	88.2	-10.8	1.92 H	151	68.4	9.0
4	#7125.00	64.1 AV	68.2	-4.1	1.92 H	151	55.1	9.0
5	7250.00	66.1 PK	74.0	-7.9	1.92 H	151	56.8	9.3
6	7250.00	52.5 AV	54.0	-1.5	1.92 H	151	43.2	9.3
7	#13970.00	52.6 PK	88.2	-35.6	1.36 H	353	35.9	16.7
8	#13970.00	41.1 AV	68.2	-27.1	1.36 H	353	24.4	16.7
9	20955.00	60.0 PK	74.0	-14.0	3.69 H	360	62.7	-2.7
10	20955.00	48.6 AV	54.0	-5.4	3.69 H	360	51.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.9 PK			1.53 V	226	95.0	7.9
2	*6985.00	92.4 AV			1.53 V	226	84.5	7.9
3	#7125.00	76.3 PK	88.2	-11.9	1.53 V	226	67.3	9.0
4	#7125.00	63.0 AV	68.2	-5.2	1.53 V	226	54.0	9.0
5	7250.00	64.9 PK	74.0	-9.1	1.53 V	226	55.6	9.3
6	7250.00	52.4 AV	54.0	-1.6	1.53 V	226	43.1	9.3
7	#13970.00	57.4 PK	88.2	-30.8	1.69 V	360	40.7	16.7
8	#13970.00	45.3 AV	68.2	-22.9	1.69 V	360	28.6	16.7
9	20955.00	53.4 PK	74.0	-20.6	2.00 V	6	56.1	-2.7
10	20955.00	42.1 AV	54.0	-11.9	2.00 V	6	44.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.3 PK	88.2	-9.9	2.67 H	76	73.9	4.4
2	#5925.00	63.9 AV	68.2	-4.3	2.67 H	76	59.5	4.4
3	*5955.00	117.7 PK			2.67 H	76	113.2	4.5
4	*5955.00	108.2 AV			2.67 H	76	103.7	4.5
5	11910.00	47.2 PK	74.0	-26.8	2.04 H	293	33.5	13.7
6	11910.00	35.1 AV	54.0	-18.9	2.04 H	293	21.4	13.7
7	17865.00	36.9 PK	74.0	-37.1	3.57 H	148	12.6	24.3
8	17865.00	25.3 AV	54.0	-28.7	3.57 H	148	1.0	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.32 V	287	73.8	4.4
2	#5925.00	58.8 AV	68.2	-9.4	1.32 V	287	54.4	4.4
3	*5955.00	115.8 PK			1.32 V	287	111.3	4.5
4	*5955.00	106.1 AV			1.32 V	287	101.6	4.5
5	11910.00	45.7 PK	74.0	-28.3	3.84 V	337	32.0	13.7
6	11910.00	33.4 AV	54.0	-20.6	3.84 V	337	19.7	13.7
7	17865.00	38.1 PK	74.0	-35.9	2.83 V	307	13.8	24.3
8	17865.00	25.1 AV	54.0	-28.9	2.83 V	307	0.8	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.2 PK			2.64 H	70	113.4	4.8
2	*6195.00	108.7 AV			2.64 H	70	103.9	4.8
3	12390.00	47.4 PK	74.0	-26.6	2.06 H	306	33.5	13.9
4	12390.00	35.3 AV	54.0	-18.7	2.06 H	306	21.4	13.9
5	18585.00	37.1 PK	74.0	-36.9	3.56 H	134	42.1	-5.0
6	18585.00	25.6 AV	54.0	-28.4	3.56 H	134	30.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.7 PK			1.28 V	301	110.9	4.8
2	*6195.00	106.1 AV			1.28 V	301	101.3	4.8
3	12390.00	46.4 PK	74.0	-27.6	3.86 V	329	32.5	13.9
4	12390.00	33.8 AV	54.0	-20.2	3.86 V	329	19.9	13.9
5	18585.00	37.7 PK	74.0	-36.3	2.78 V	301	42.7	-5.0
6	18585.00	24.8 AV	54.0	-29.2	2.78 V	301	29.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			2.69 H	73	112.3	6.2
2	*6415.00	108.7 AV			2.69 H	73	102.5	6.2
3	#12830.00	47.6 PK	88.2	-40.6	2.03 H	286	33.1	14.5
4	#12830.00	35.3 AV	68.2	-32.9	2.03 H	286	20.8	14.5
5	19245.00	36.8 PK	74.0	-37.2	3.60 H	145	40.6	-3.8
6	19245.00	25.2 AV	54.0	-28.8	3.60 H	145	29.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.0 PK			1.36 V	292	109.8	6.2
2	*6415.00	106.5 AV			1.36 V	292	100.3	6.2
3	#12830.00	45.3 PK	88.2	-42.9	3.86 V	334	30.8	14.5
4	#12830.00	33.2 AV	68.2	-35.0	3.86 V	334	18.7	14.5
5	19245.00	38.7 PK	74.0	-35.3	2.77 V	318	42.5	-3.8
6	19245.00	25.5 AV	54.0	-28.5	2.77 V	318	29.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.3 PK			2.71 H	87	111.1	6.2
2	*6435.00	107.7 AV			2.71 H	87	101.5	6.2
3	#12870.00	47.8 PK	88.2	-40.4	2.02 H	308	33.1	14.7
4	#12870.00	35.4 AV	68.2	-32.8	2.02 H	308	20.7	14.7
5	19305.00	37.0 PK	74.0	-37.0	3.51 H	159	40.7	-3.7
6	19305.00	25.7 AV	54.0	-28.3	3.51 H	159	29.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	116.1 PK			1.36 V	272	109.9	6.2
2	*6435.00	106.4 AV			1.36 V	272	100.2	6.2
3	#12870.00	45.6 PK	88.2	-42.6	3.84 V	331	30.9	14.7
4	#12870.00	33.3 AV	68.2	-34.9	3.84 V	331	18.6	14.7
5	19305.00	38.1 PK	74.0	-35.9	2.78 V	298	41.8	-3.7
6	19305.00	25.2 AV	54.0	-28.8	2.78 V	298	28.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.4 PK			2.73 H	84	112.0	6.4
2	*6475.00	108.6 AV			2.73 H	84	102.2	6.4
3	#12950.00	47.5 PK	88.2	-40.7	2.08 H	297	32.8	14.7
4	#12950.00	35.3 AV	68.2	-32.9	2.08 H	297	20.6	14.7
5	19425.00	36.8 PK	74.0	-37.2	3.61 H	146	40.6	-3.8
6	19425.00	25.4 AV	54.0	-28.6	3.61 H	146	29.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.2 PK			1.29 V	286	109.8	6.4
2	*6475.00	106.6 AV			1.29 V	286	100.2	6.4
3	#12950.00	46.3 PK	88.2	-41.9	3.85 V	341	31.6	14.7
4	#12950.00	33.8 AV	68.2	-34.4	3.85 V	341	19.1	14.7
5	19425.00	38.3 PK	74.0	-35.7	2.85 V	319	42.1	-3.8
6	19425.00	25.1 AV	54.0	-28.9	2.85 V	319	28.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.2 PK			2.73 H	79	110.5	6.7
2	*6515.00	107.7 AV			2.73 H	79	101.0	6.7
3	#13030.00	47.8 PK	88.2	-40.4	2.02 H	283	33.2	14.6
4	#13030.00	35.5 AV	68.2	-32.7	2.02 H	283	20.9	14.6
5	19545.00	36.4 PK	74.0	-37.6	3.53 H	148	40.5	-4.1
6	19545.00	24.9 AV	54.0	-29.1	3.53 H	148	29.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	116.2 PK			1.29 V	272	109.5	6.7
2	*6515.00	106.3 AV			1.29 V	272	99.6	6.7
3	#13030.00	45.0 PK	88.2	-43.2	3.89 V	325	30.4	14.6
4	#13030.00	33.0 AV	68.2	-35.2	3.89 V	325	18.4	14.6
5	19545.00	37.6 PK	74.0	-36.4	2.81 V	312	41.7	-4.1
6	19545.00	24.9 AV	54.0	-29.1	2.81 V	312	29.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			2.73 H	89	110.8	6.8
2	*6535.00	107.9 AV			2.73 H	89	101.1	6.8
3	#13070.00	47.2 PK	88.2	-41.0	1.98 H	289	32.5	14.7
4	#13070.00	35.3 AV	68.2	-32.9	1.98 H	289	20.6	14.7
5	19605.00	37.0 PK	74.0	-37.0	3.55 H	152	41.0	-4.0
6	19605.00	25.7 AV	54.0	-28.3	3.55 H	152	29.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.2 PK			1.37 V	280	108.4	6.8
2	*6535.00	105.7 AV			1.37 V	280	98.9	6.8
3	#13070.00	46.1 PK	88.2	-42.1	3.80 V	333	31.4	14.7
4	#13070.00	33.6 AV	68.2	-34.6	3.80 V	333	18.9	14.7
5	19605.00	37.5 PK	74.0	-36.5	2.88 V	314	41.5	-4.0
6	19605.00	24.6 AV	54.0	-29.4	2.88 V	314	28.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.8 PK			2.65 H	76	110.8	7.0
2	*6695.00	108.1 AV			2.65 H	76	101.1	7.0
3	13390.00	47.3 PK	74.0	-26.7	2.04 H	290	32.0	15.3
4	13390.00	35.0 AV	54.0	-19.0	2.04 H	290	19.7	15.3
5	20085.00	37.0 PK	74.0	-37.0	3.54 H	143	40.5	-3.5
6	20085.00	25.3 AV	54.0	-28.7	3.54 H	143	28.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.4 PK			1.32 V	296	108.4	7.0
2	*6695.00	106.0 AV			1.32 V	296	99.0	7.0
3	13390.00	45.8 PK	74.0	-28.2	3.79 V	349	30.5	15.3
4	13390.00	33.5 AV	54.0	-20.5	3.79 V	349	18.2	15.3
5	20085.00	37.9 PK	74.0	-36.1	2.83 V	309	41.4	-3.5
6	20085.00	24.6 AV	54.0	-29.4	2.83 V	309	28.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.4 PK			2.72 H	73	110.4	7.0
2	*6855.00	107.8 AV			2.72 H	73	100.8	7.0
3	#13710.00	47.3 PK	88.2	-40.9	2.05 H	300	31.0	16.3
4	#13710.00	35.2 AV	68.2	-33.0	2.05 H	300	18.9	16.3
5	20565.00	37.2 PK	74.0	-36.8	3.61 H	136	40.5	-3.3
6	20565.00	25.5 AV	54.0	-28.5	3.61 H	136	28.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.4 PK			1.31 V	286	108.4	7.0
2	*6855.00	106.0 AV			1.31 V	286	99.0	7.0
3	#13710.00	45.4 PK	88.2	-42.8	3.88 V	334	29.1	16.3
4	#13710.00	32.9 AV	68.2	-35.3	3.88 V	334	16.6	16.3
5	20565.00	38.3 PK	74.0	-35.7	2.83 V	315	41.6	-3.3
6	20565.00	25.4 AV	54.0	-28.6	2.83 V	315	28.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.3 PK			2.68 H	86	110.2	7.1
2	*6875.00	107.8 AV			2.68 H	86	100.7	7.1
3	#13750.00	47.2 PK	88.2	-41.0	2.00 H	288	31.1	16.1
4	#13750.00	35.0 AV	68.2	-33.2	2.00 H	288	18.9	16.1
5	20625.00	36.6 PK	74.0	-37.4	3.58 H	132	39.9	-3.3
6	20625.00	25.0 AV	54.0	-29.0	3.58 H	132	28.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	116.3 PK			1.37 V	287	109.2	7.1
2	*6875.00	106.5 AV			1.37 V	287	99.4	7.1
3	#13750.00	45.4 PK	88.2	-42.8	3.86 V	350	29.3	16.1
4	#13750.00	33.1 AV	68.2	-35.1	3.86 V	350	17.0	16.1
5	20625.00	38.1 PK	74.0	-35.9	2.79 V	320	41.4	-3.3
6	20625.00	25.3 AV	54.0	-28.7	2.79 V	320	28.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.8 PK			2.73 H	90	109.9	7.9
2	*6995.00	108.2 AV			2.73 H	90	100.3	7.9
3	#13990.00	47.0 PK	88.2	-41.2	2.02 H	281	30.3	16.7
4	#13990.00	35.2 AV	68.2	-33.0	2.02 H	281	18.5	16.7
5	20985.00	37.1 PK	74.0	-36.9	3.57 H	138	39.9	-2.8
6	20985.00	25.6 AV	54.0	-28.4	3.57 H	138	28.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	116.0 PK			1.31 V	289	108.1	7.9
2	*6995.00	106.2 AV			1.31 V	289	98.3	7.9
3	#13990.00	45.5 PK	88.2	-42.7	3.84 V	339	28.8	16.7
4	#13990.00	33.3 AV	68.2	-34.9	3.84 V	339	16.6	16.7
5	20985.00	38.0 PK	74.0	-36.0	2.79 V	298	40.8	-2.8
6	20985.00	24.9 AV	54.0	-29.1	2.79 V	298	27.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	111.4 PK			1.00 H	20	102.4	9.0
2	*7115.00	102.7 AV			1.00 H	20	93.7	9.0
3	#7125.00	80.0 PK	88.2	-8.2	1.00 H	20	71.0	9.0
4	#7125.00	63.4 AV	68.2	-4.8	1.00 H	20	54.4	9.0
5	7250.00	55.8 PK	74.0	-18.2	1.00 H	20	46.5	9.3
6	7250.00	43.9 AV	54.0	-10.1	1.00 H	20	34.6	9.3
7	#14230.00	46.8 PK	88.2	-41.4	1.99 H	294	29.9	16.9
8	#14230.00	34.9 AV	68.2	-33.3	1.99 H	294	18.0	16.9
9	21345.00	37.4 PK	74.0	-36.6	3.63 H	156	39.0	-1.6
10	21345.00	25.6 AV	54.0	-28.4	3.63 H	156	27.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	109.1 PK			1.20 V	299	100.1	9.0
2	*7115.00	100.6 AV			1.20 V	299	91.6	9.0
3	#7125.00	84.5 PK	88.2	-3.7	1.20 V	299	75.5	9.0
4	#7125.00	66.6 AV	68.2	-1.6	1.20 V	299	57.6	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.20 V	299	46.1	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.20 V	299	34.5	9.3
7	#14230.00	45.1 PK	88.2	-43.1	3.80 V	323	28.2	16.9
8	#14230.00	32.9 AV	68.2	-35.3	3.80 V	323	16.0	16.9
9	21345.00	38.2 PK	74.0	-35.8	2.83 V	291	39.8	-1.6
10	21345.00	25.1 AV	54.0	-28.9	2.83 V	291	26.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Mode B

2Tx NSS1(SU)

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.3 PK	88.2	-10.9	2.89 H	108	72.9	4.4
2	#5925.00	65.2 AV	68.2	-3.0	2.89 H	108	60.8	4.4
3	*5955.00	117.6 PK			2.89 H	108	113.1	4.5
4	*5955.00	106.7 AV			2.89 H	108	102.2	4.5
5	11910.00	47.4 PK	74.0	-26.6	2.03 H	285	33.7	13.7
6	11910.00	35.1 AV	54.0	-18.9	2.03 H	285	21.4	13.7
7	17865.00	36.1 PK	74.0	-37.9	3.55 H	143	11.8	24.3
8	17865.00	24.8 AV	54.0	-29.2	3.55 H	143	0.5	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.7 PK	88.2	-15.5	1.33 V	290	68.3	4.4
2	#5925.00	62.7 AV	68.2	-5.5	1.33 V	290	58.3	4.4
3	*5955.00	113.5 PK			1.33 V	290	109.0	4.5
4	*5955.00	102.1 AV			1.33 V	290	97.6	4.5
5	11910.00	46.1 PK	74.0	-27.9	3.87 V	340	32.4	13.7
6	11910.00	33.7 AV	54.0	-20.3	3.87 V	340	20.0	13.7
7	17865.00	37.9 PK	74.0	-36.1	2.83 V	317	13.6	24.3
8	17865.00	24.7 AV	54.0	-29.3	2.83 V	317	0.4	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.7 PK			2.90 H	106	112.9	4.8
2	*6195.00	106.7 AV			2.90 H	106	101.9	4.8
3	12390.00	47.2 PK	74.0	-26.8	2.06 H	278	33.3	13.9
4	12390.00	35.2 AV	54.0	-18.8	2.06 H	278	21.3	13.9
5	18585.00	37.5 PK	74.0	-36.5	3.57 H	151	42.5	-5.0
6	18585.00	25.6 AV	54.0	-28.4	3.57 H	151	30.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.5 PK			1.34 V	293	108.7	4.8
2	*6195.00	102.2 AV			1.34 V	293	97.4	4.8
3	12390.00	45.8 PK	74.0	-28.2	3.80 V	350	31.9	13.9
4	12390.00	33.3 AV	54.0	-20.7	3.80 V	350	19.4	13.9
5	18585.00	37.8 PK	74.0	-36.2	2.86 V	309	42.8	-5.0
6	18585.00	24.6 AV	54.0	-29.4	2.86 V	309	29.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.8 PK			2.86 H	98	110.6	6.2
2	*6415.00	106.2 AV			2.86 H	98	100.0	6.2
3	#12830.00	46.5 PK	88.2	-41.7	2.07 H	288	32.0	14.5
4	#12830.00	34.6 AV	68.2	-33.6	2.07 H	288	20.1	14.5
5	19245.00	36.4 PK	74.0	-37.6	3.61 H	159	40.2	-3.8
6	19245.00	24.9 AV	54.0	-29.1	3.61 H	159	28.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.9 PK			1.37 V	301	107.7	6.2
2	*6415.00	102.4 AV			1.37 V	301	96.2	6.2
3	#12830.00	45.4 PK	88.2	-42.8	3.80 V	353	30.9	14.5
4	#12830.00	33.1 AV	68.2	-35.1	3.80 V	353	18.6	14.5
5	19245.00	38.1 PK	74.0	-35.9	2.78 V	318	41.9	-3.8
6	19245.00	25.4 AV	54.0	-28.6	2.78 V	318	29.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	117.4 PK			2.88 H	103	111.2	6.2
2	*6435.00	106.6 AV			2.88 H	103	100.4	6.2
3	#12870.00	47.2 PK	88.2	-41.0	2.04 H	283	32.5	14.7
4	#12870.00	35.3 AV	68.2	-32.9	2.04 H	283	20.6	14.7
5	19305.00	37.2 PK	74.0	-36.8	3.57 H	147	40.9	-3.7
6	19305.00	25.4 AV	54.0	-28.6	3.57 H	147	29.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	114.0 PK			1.29 V	289	107.8	6.2
2	*6435.00	102.5 AV			1.29 V	289	96.3	6.2
3	#12870.00	45.3 PK	88.2	-42.9	3.85 V	339	30.6	14.7
4	#12870.00	33.0 AV	68.2	-35.2	3.85 V	339	18.3	14.7
5	19305.00	38.4 PK	74.0	-35.6	2.82 V	294	42.1	-3.7
6	19305.00	25.3 AV	54.0	-28.7	2.82 V	294	29.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.8 PK			2.85 H	94	111.4	6.4
2	*6475.00	107.1 AV			2.85 H	94	100.7	6.4
3	#12950.00	47.6 PK	88.2	-40.6	2.03 H	298	32.9	14.7
4	#12950.00	35.5 AV	68.2	-32.7	2.03 H	298	20.8	14.7
5	19425.00	36.6 PK	74.0	-37.4	3.62 H	142	40.4	-3.8
6	19425.00	25.1 AV	54.0	-28.9	3.62 H	142	28.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.0 PK			1.35 V	300	107.6	6.4
2	*6475.00	102.5 AV			1.35 V	300	96.1	6.4
3	#12950.00	45.1 PK	88.2	-43.1	3.90 V	321	30.4	14.7
4	#12950.00	33.0 AV	68.2	-35.2	3.90 V	321	18.3	14.7
5	19425.00	38.2 PK	74.0	-35.8	2.79 V	322	42.0	-3.8
6	19425.00	25.2 AV	54.0	-28.8	2.79 V	322	29.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	117.4 PK			2.91 H	94	110.7	6.7
2	*6515.00	106.3 AV			2.91 H	94	99.6	6.7
3	#13030.00	47.3 PK	88.2	-40.9	1.99 H	298	32.7	14.6
4	#13030.00	35.0 AV	68.2	-33.2	1.99 H	298	20.4	14.6
5	19545.00	36.8 PK	74.0	-37.2	3.55 H	156	40.9	-4.1
6	19545.00	25.3 AV	54.0	-28.7	3.55 H	156	29.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	113.7 PK			1.28 V	301	107.0	6.7
2	*6515.00	102.3 AV			1.28 V	301	95.6	6.7
3	#13030.00	46.2 PK	88.2	-42.0	3.83 V	332	31.6	14.6
4	#13030.00	33.8 AV	68.2	-34.4	3.83 V	332	19.2	14.6
5	19545.00	37.9 PK	74.0	-36.1	2.78 V	303	42.0	-4.1
6	19545.00	25.0 AV	54.0	-29.0	2.78 V	303	29.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			2.88 H	107	111.3	6.8
2	*6535.00	107.1 AV			2.88 H	107	100.3	6.8
3	#13070.00	47.0 PK	88.2	-41.2	2.01 H	303	32.3	14.7
4	#13070.00	34.9 AV	68.2	-33.3	2.01 H	303	20.2	14.7
5	19605.00	36.4 PK	74.0	-37.6	3.53 H	144	40.4	-4.0
6	19605.00	24.9 AV	54.0	-29.1	3.53 H	144	28.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.4 PK			1.36 V	300	106.6	6.8
2	*6535.00	101.7 AV			1.36 V	300	94.9	6.8
3	#13070.00	45.8 PK	88.2	-42.4	3.87 V	346	31.1	14.7
4	#13070.00	33.8 AV	68.2	-34.4	3.87 V	346	19.1	14.7
5	19605.00	38.2 PK	74.0	-35.8	2.85 V	301	42.2	-4.0
6	19605.00	25.2 AV	54.0	-28.8	2.85 V	301	29.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.1 PK			2.86 H	96	111.1	7.0
2	*6695.00	107.2 AV			2.86 H	96	100.2	7.0
3	13390.00	47.3 PK	74.0	-26.7	2.04 H	289	32.0	15.3
4	13390.00	35.3 AV	54.0	-18.7	2.04 H	289	20.0	15.3
5	20085.00	37.4 PK	74.0	-36.6	3.51 H	146	40.9	-3.5
6	20085.00	25.7 AV	54.0	-28.3	3.51 H	146	29.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.4 PK			1.39 V	294	106.4	7.0
2	*6695.00	101.9 AV			1.39 V	294	94.9	7.0
3	13390.00	45.6 PK	74.0	-28.4	3.79 V	346	30.3	15.3
4	13390.00	33.4 AV	54.0	-20.6	3.79 V	346	18.1	15.3
5	20085.00	38.3 PK	74.0	-35.7	2.78 V	302	41.8	-3.5
6	20085.00	25.4 AV	54.0	-28.6	2.78 V	302	28.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.6 PK			2.95 H	99	110.6	7.0
2	*6855.00	106.9 AV			2.95 H	99	99.9	7.0
3	#13710.00	46.7 PK	88.2	-41.5	2.00 H	278	30.4	16.3
4	#13710.00	34.8 AV	68.2	-33.4	2.00 H	278	18.5	16.3
5	20565.00	36.6 PK	74.0	-37.4	3.60 H	139	39.9	-3.3
6	20565.00	25.3 AV	54.0	-28.7	3.60 H	139	28.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.8 PK			1.34 V	293	106.8	7.0
2	*6855.00	102.2 AV			1.34 V	293	95.2	7.0
3	#13710.00	45.3 PK	88.2	-42.9	3.83 V	348	29.0	16.3
4	#13710.00	33.3 AV	68.2	-34.9	3.83 V	348	17.0	16.3
5	20565.00	38.1 PK	74.0	-35.9	2.87 V	307	41.4	-3.3
6	20565.00	25.2 AV	54.0	-28.8	2.87 V	307	28.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	117.9 PK			2.91 H	112	110.8	7.1
2	*6875.00	106.8 AV			2.91 H	112	99.7	7.1
3	#13750.00	47.2 PK	88.2	-41.0	2.01 H	296	31.1	16.1
4	#13750.00	35.4 AV	68.2	-32.8	2.01 H	296	19.3	16.1
5	20625.00	37.6 PK	74.0	-36.4	3.56 H	164	40.9	-3.3
6	20625.00	25.8 AV	54.0	-28.2	3.56 H	164	29.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	113.8 PK			1.32 V	299	106.7	7.1
2	*6875.00	102.5 AV			1.32 V	299	95.4	7.1
3	#13750.00	46.1 PK	88.2	-42.1	3.80 V	330	30.0	16.1
4	#13750.00	33.9 AV	68.2	-34.3	3.80 V	330	17.8	16.1
5	20625.00	37.6 PK	74.0	-36.4	2.87 V	291	40.9	-3.3
6	20625.00	24.7 AV	54.0	-29.3	2.87 V	291	28.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	117.6 PK			2.88 H	100	109.7	7.9
2	*6995.00	106.7 AV			2.88 H	100	98.8	7.9
3	#13990.00	46.8 PK	88.2	-41.4	1.98 H	307	30.1	16.7
4	#13990.00	34.9 AV	68.2	-33.3	1.98 H	307	18.2	16.7
5	20985.00	36.2 PK	74.0	-37.8	3.59 H	149	39.0	-2.8
6	20985.00	24.8 AV	54.0	-29.2	3.59 H	149	27.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	113.5 PK			1.36 V	287	105.6	7.9
2	*6995.00	102.2 AV			1.36 V	287	94.3	7.9
3	#13990.00	45.8 PK	88.2	-42.4	3.83 V	338	29.1	16.7
4	#13990.00	33.5 AV	68.2	-34.7	3.83 V	338	16.8	16.7
5	20985.00	38.1 PK	74.0	-35.9	2.79 V	313	40.9	-2.8
6	20985.00	25.1 AV	54.0	-28.9	2.79 V	313	27.9	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.6 PK			1.01 H	21	93.6	9.0
2	*7115.00	92.6 AV			1.01 H	21	83.6	9.0
3	#7125.00	86.5 PK	88.2	-1.7	1.01 H	21	77.5	9.0
4	#7125.00	61.6 AV	68.2	-6.6	1.01 H	21	52.6	9.0
5	7250.00	55.6 PK	74.0	-18.4	1.01 H	21	46.3	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.01 H	21	34.4	9.3
7	#14230.00	47.0 PK	88.2	-41.2	2.04 H	301	30.1	16.9
8	#14230.00	34.8 AV	68.2	-33.4	2.04 H	301	17.9	16.9
9	21345.00	37.2 PK	74.0	-36.8	3.51 H	144	38.8	-1.6
10	21345.00	25.3 AV	54.0	-28.7	3.51 H	144	26.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.5 PK			1.14 V	300	94.5	9.0
2	*7115.00	92.2 AV			1.14 V	300	83.2	9.0
3	#7125.00	86.0 PK	88.2	-2.2	1.14 V	300	77.0	9.0
4	#7125.00	61.3 AV	68.2	-6.9	1.14 V	300	52.3	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.14 V	300	46.7	9.3
6	7250.00	43.6 AV	54.0	-10.4	1.14 V	300	34.3	9.3
7	#14230.00	45.9 PK	88.2	-42.3	3.87 V	353	29.0	16.9
8	#14230.00	33.6 AV	68.2	-34.6	3.87 V	353	16.7	16.9
9	21345.00	38.1 PK	74.0	-35.9	2.81 V	311	39.7	-1.6
10	21345.00	25.3 AV	54.0	-28.7	2.81 V	311	26.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.9 PK	88.2	-7.3	2.73 H	75	76.5	4.4
2	#5925.00	65.4 AV	68.2	-2.8	2.73 H	75	61.0	4.4
3	*5965.00	111.8 PK			2.73 H	75	107.3	4.5
4	*5965.00	97.5 AV			2.73 H	75	93.0	4.5
5	11930.00	47.5 PK	74.0	-26.5	2.08 H	277	33.8	13.7
6	11930.00	35.2 AV	54.0	-18.8	2.08 H	277	21.5	13.7
7	17895.00	36.8 PK	74.0	-37.2	3.58 H	150	11.9	24.9
8	17895.00	25.4 AV	54.0	-28.6	3.58 H	150	0.5	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.1 PK	88.2	-11.1	1.56 V	287	72.7	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.56 V	287	61.9	4.4
3	*5965.00	109.4 PK			1.56 V	287	104.9	4.5
4	*5965.00	97.8 AV			1.56 V	287	93.3	4.5
5	11930.00	46.4 PK	74.0	-27.6	3.86 V	328	32.7	13.7
6	11930.00	33.9 AV	54.0	-20.1	3.86 V	328	20.2	13.7
7	17895.00	37.8 PK	74.0	-36.2	2.77 V	304	12.9	24.9
8	17895.00	24.9 AV	54.0	-29.1	2.77 V	304	0.0	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.4 PK			3.48 H	32	107.5	4.9
2	*6205.00	100.0 AV			3.48 H	32	95.1	4.9
3	12410.00	47.0 PK	74.0	-27.0	1.98 H	277	33.2	13.8
4	12410.00	34.8 AV	54.0	-19.2	1.98 H	277	21.0	13.8
5	18615.00	36.7 PK	74.0	-37.3	3.54 H	159	41.6	-4.9
6	18615.00	25.4 AV	54.0	-28.6	3.54 H	159	30.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.8 PK			1.45 V	312	108.9	4.9
2	*6205.00	101.2 AV			1.45 V	312	96.3	4.9
3	12410.00	46.0 PK	74.0	-28.0	3.89 V	351	32.2	13.8
4	12410.00	33.7 AV	54.0	-20.3	3.89 V	351	19.9	13.8
5	18615.00	37.9 PK	74.0	-36.1	2.88 V	297	42.8	-4.9
6	18615.00	24.7 AV	54.0	-29.3	2.88 V	297	29.6	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.2 PK			3.54 H	35	106.0	6.2
2	*6405.00	100.1 AV			3.54 H	35	93.9	6.2
3	#12810.00	46.6 PK	88.2	-41.6	2.03 H	281	32.2	14.4
4	#12810.00	34.6 AV	68.2	-33.6	2.03 H	281	20.2	14.4
5	19215.00	37.0 PK	74.0	-37.0	3.57 H	158	40.7	-3.7
6	19215.00	25.2 AV	54.0	-28.8	3.57 H	158	28.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.9 PK			1.50 V	326	107.7	6.2
2	*6405.00	101.3 AV			1.50 V	326	95.1	6.2
3	#12810.00	46.1 PK	88.2	-42.1	3.85 V	323	31.7	14.4
4	#12810.00	33.8 AV	68.2	-34.4	3.85 V	323	19.4	14.4
5	19215.00	38.4 PK	74.0	-35.6	2.89 V	316	42.1	-3.7
6	19215.00	25.1 AV	54.0	-28.9	2.89 V	316	28.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	112.7 PK			3.47 H	35	106.5	6.2
2	*6445.00	100.3 AV			3.47 H	35	94.1	6.2
3	#12890.00	47.3 PK	88.2	-40.9	2.00 H	291	32.6	14.7
4	#12890.00	35.4 AV	68.2	-32.8	2.00 H	291	20.7	14.7
5	19335.00	37.1 PK	74.0	-36.9	3.51 H	147	40.8	-3.7
6	19335.00	25.7 AV	54.0	-28.3	3.51 H	147	29.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	113.5 PK			1.43 V	312	107.3	6.2
2	*6445.00	100.7 AV			1.43 V	312	94.5	6.2
3	#12890.00	45.5 PK	88.2	-42.7	3.85 V	347	30.8	14.7
4	#12890.00	33.3 AV	68.2	-34.9	3.85 V	347	18.6	14.7
5	19335.00	37.7 PK	74.0	-36.3	2.84 V	301	41.4	-3.7
6	19335.00	24.8 AV	54.0	-29.2	2.84 V	301	28.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	112.0 PK			3.44 H	40	105.5	6.5
2	*6485.00	99.8 AV			3.44 H	40	93.3	6.5
3	#12970.00	47.6 PK	88.2	-40.6	1.99 H	289	33.0	14.6
4	#12970.00	35.5 AV	68.2	-32.7	1.99 H	289	20.9	14.6
5	19455.00	36.9 PK	74.0	-37.1	3.59 H	154	40.8	-3.9
6	19455.00	25.4 AV	54.0	-28.6	3.59 H	154	29.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.5 PK			1.44 V	304	107.0	6.5
2	*6485.00	101.1 AV			1.44 V	304	94.6	6.5
3	#12970.00	45.2 PK	88.2	-43.0	3.86 V	321	30.6	14.6
4	#12970.00	33.0 AV	68.2	-35.2	3.86 V	321	18.4	14.6
5	19455.00	38.3 PK	74.0	-35.7	2.89 V	317	42.2	-3.9
6	19455.00	25.4 AV	54.0	-28.6	2.89 V	317	29.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	112.8 PK			3.47 H	42	106.0	6.8
2	*6525.00	100.4 AV			3.47 H	42	93.6	6.8
3	#13050.00	46.7 PK	88.2	-41.5	2.02 H	299	32.1	14.6
4	#13050.00	34.8 AV	68.2	-33.4	2.02 H	299	20.2	14.6
5	19575.00	37.0 PK	74.0	-37.0	3.51 H	144	41.1	-4.1
6	19575.00	25.3 AV	54.0	-28.7	3.51 H	144	29.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	113.3 PK			1.40 V	321	106.5	6.8
2	*6525.00	100.9 AV			1.40 V	321	94.1	6.8
3	#13050.00	45.3 PK	88.2	-42.9	3.89 V	340	30.7	14.6
4	#13050.00	33.0 AV	68.2	-35.2	3.89 V	340	18.4	14.6
5	19575.00	37.8 PK	74.0	-36.2	2.78 V	297	41.9	-4.1
6	19575.00	24.9 AV	54.0	-29.1	2.78 V	297	29.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	112.0 PK			3.50 H	39	105.2	6.8
2	*6565.00	99.7 AV			3.50 H	39	92.9	6.8
3	#13130.00	47.0 PK	88.2	-41.2	2.00 H	278	32.3	14.7
4	#13130.00	35.0 AV	68.2	-33.2	2.00 H	278	20.3	14.7
5	19695.00	36.7 PK	74.0	-37.3	3.57 H	145	40.6	-3.9
6	19695.00	25.0 AV	54.0	-29.0	3.57 H	145	28.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.3 PK			1.50 V	323	106.5	6.8
2	*6565.00	100.9 AV			1.50 V	323	94.1	6.8
3	#13130.00	45.8 PK	88.2	-42.4	3.83 V	338	31.1	14.7
4	#13130.00	33.3 AV	68.2	-34.9	3.83 V	338	18.6	14.7
5	19695.00	38.4 PK	74.0	-35.6	2.88 V	292	42.3	-3.9
6	19695.00	25.4 AV	54.0	-28.6	2.88 V	292	29.3	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	111.8 PK			3.54 H	17	104.9	6.9
2	*6685.00	99.7 AV			3.54 H	17	92.8	6.9
3	13370.00	47.0 PK	74.0	-27.0	2.05 H	308	31.8	15.2
4	13370.00	35.1 AV	54.0	-18.9	2.05 H	308	19.9	15.2
5	20055.00	36.7 PK	74.0	-37.3	3.59 H	150	40.2	-3.5
6	20055.00	24.8 AV	54.0	-29.2	3.59 H	150	28.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.4 PK			1.40 V	316	106.5	6.9
2	*6685.00	101.0 AV			1.40 V	316	94.1	6.9
3	13370.00	45.7 PK	74.0	-28.3	3.88 V	335	30.5	15.2
4	13370.00	33.3 AV	54.0	-20.7	3.88 V	335	18.1	15.2
5	20055.00	38.2 PK	74.0	-35.8	2.82 V	316	41.7	-3.5
6	20055.00	25.4 AV	54.0	-28.6	2.82 V	316	28.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	112.5 PK			3.44 H	48	105.5	7.0
2	*6845.00	100.0 AV			3.44 H	48	93.0	7.0
3	#13690.00	47.3 PK	88.2	-40.9	2.07 H	289	31.0	16.3
4	#13690.00	35.2 AV	68.2	-33.0	2.07 H	289	18.9	16.3
5	20535.00	37.2 PK	74.0	-36.8	3.58 H	144	40.4	-3.2
6	20535.00	25.3 AV	54.0	-28.7	3.58 H	144	28.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.4 PK			1.43 V	312	106.4	7.0
2	*6845.00	100.7 AV			1.43 V	312	93.7	7.0
3	#13690.00	45.2 PK	88.2	-43.0	3.82 V	341	28.9	16.3
4	#13690.00	32.9 AV	68.2	-35.3	3.82 V	341	16.6	16.3
5	20535.00	37.6 PK	74.0	-36.4	2.84 V	296	40.8	-3.2
6	20535.00	24.6 AV	54.0	-29.4	2.84 V	296	27.8	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	112.9 PK			3.43 H	40	105.8	7.1
2	*6885.00	100.2 AV			3.43 H	40	93.1	7.1
3	#13770.00	47.0 PK	88.2	-41.2	2.07 H	286	31.1	15.9
4	#13770.00	35.0 AV	68.2	-33.2	2.07 H	286	19.1	15.9
5	20655.00	37.4 PK	74.0	-36.6	3.54 H	161	40.7	-3.3
6	20655.00	25.7 AV	54.0	-28.3	3.54 H	161	29.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	114.2 PK			1.47 V	309	107.1	7.1
2	*6885.00	101.6 AV			1.47 V	309	94.5	7.1
3	#13770.00	46.1 PK	88.2	-42.1	3.81 V	338	30.2	15.9
4	#13770.00	33.6 AV	68.2	-34.6	3.81 V	338	17.7	15.9
5	20655.00	37.7 PK	74.0	-36.3	2.88 V	293	41.0	-3.3
6	20655.00	24.9 AV	54.0	-29.1	2.88 V	293	28.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	112.0 PK			3.48 H	39	104.3	7.7
2	*6965.00	99.9 AV			3.48 H	39	92.2	7.7
3	#13930.00	46.6 PK	88.2	-41.6	2.07 H	297	30.1	16.5
4	#13930.00	34.8 AV	68.2	-33.4	2.07 H	297	18.3	16.5
5	20895.00	36.8 PK	74.0	-37.2	3.52 H	163	39.5	-2.7
6	20895.00	25.1 AV	54.0	-28.9	3.52 H	163	27.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	114.0 PK			1.43 V	319	106.3	7.7
2	*6965.00	101.2 AV			1.43 V	319	93.5	7.7
3	#13930.00	46.0 PK	88.2	-42.2	3.82 V	337	29.5	16.5
4	#13930.00	33.7 AV	68.2	-34.5	3.82 V	337	17.2	16.5
5	20895.00	37.9 PK	74.0	-36.1	2.81 V	316	40.6	-2.7
6	20895.00	25.0 AV	54.0	-29.0	2.81 V	316	27.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	105.0 PK			2.73 H	75	96.3	8.7
2	*7085.00	92.4 AV			2.73 H	75	83.7	8.7
3	#7125.00	69.6 PK	88.2	-18.6	2.73 H	75	60.6	9.0
4	#7125.00	58.0 AV	68.2	-10.2	2.73 H	75	49.0	9.0
5	7250.00	55.5 PK	74.0	-18.5	2.73 H	75	46.2	9.3
6	7250.00	43.8 AV	54.0	-10.2	2.73 H	75	34.5	9.3
7	#14170.00	48.0 PK	88.2	-40.2	2.07 H	291	31.5	16.5
8	#14170.00	35.6 AV	68.2	-32.6	2.07 H	291	19.1	16.5
9	21255.00	36.5 PK	74.0	-37.5	3.57 H	132	37.9	-1.4
10	21255.00	24.8 AV	54.0	-29.2	3.57 H	132	26.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	111.8 PK			1.32 V	300	103.1	8.7
2	*7085.00	100.7 AV			1.32 V	300	92.0	8.7
3	#7125.00	77.5 PK	88.2	-10.7	1.32 V	300	68.5	9.0
4	#7125.00	66.6 AV	68.2	-1.6	1.32 V	300	57.6	9.0
5	7250.00	55.7 PK	74.0	-18.3	1.32 V	300	46.4	9.3
6	7250.00	43.8 AV	54.0	-10.2	1.32 V	300	34.5	9.3
7	#14170.00	45.8 PK	88.2	-42.4	3.80 V	349	29.3	16.5
8	#14170.00	33.3 AV	68.2	-34.9	3.80 V	349	16.8	16.5
9	21255.00	37.9 PK	74.0	-36.1	2.85 V	311	39.3	-1.4
10	21255.00	25.2 AV	54.0	-28.8	2.85 V	311	26.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.39 H	54	72.4	4.4
2	#5925.00	64.3 AV	68.2	-3.9	1.39 H	54	59.9	4.4
3	*5985.00	105.0 PK			1.39 H	54	100.4	4.6
4	*5985.00	92.5 AV			1.39 H	54	87.9	4.6
5	11970.00	48.7 PK	74.0	-25.3	2.08 H	303	34.9	13.8
6	11970.00	36.0 AV	54.0	-18.0	2.08 H	303	22.2	13.8
7	17955.00	36.5 PK	74.0	-37.5	3.57 H	137	9.8	26.7
8	17955.00	24.6 AV	54.0	-29.4	3.57 H	137	-2.1	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.7 PK	88.2	-9.5	1.42 V	288	74.3	4.4
2	#5925.00	66.6 AV	68.2	-1.6	1.42 V	288	62.2	4.4
3	*5985.00	106.3 PK			1.42 V	288	101.7	4.6
4	*5985.00	94.2 AV			1.42 V	288	89.6	4.6
5	11970.00	46.1 PK	74.0	-27.9	3.89 V	344	32.3	13.8
6	11970.00	33.7 AV	54.0	-20.3	3.89 V	344	19.9	13.8
7	17955.00	38.3 PK	74.0	-35.7	2.82 V	300	11.6	26.7
8	17955.00	25.3 AV	54.0	-28.7	2.82 V	300	-1.4	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.6 PK			2.42 H	35	105.4	5.2
2	*6225.00	98.0 AV			2.42 H	35	92.8	5.2
3	12450.00	48.2 PK	74.0	-25.8	2.08 H	304	34.5	13.7
4	12450.00	35.8 AV	54.0	-18.2	2.08 H	304	22.1	13.7
5	18675.00	36.9 PK	74.0	-37.1	3.54 H	118	41.8	-4.9
6	18675.00	25.2 AV	54.0	-28.8	3.54 H	118	30.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	111.0 PK			2.81 V	310	105.8	5.2
2	*6225.00	97.8 AV			2.81 V	310	92.6	5.2
3	12450.00	45.2 PK	74.0	-28.8	3.85 V	337	31.5	13.7
4	12450.00	33.1 AV	54.0	-20.9	3.85 V	337	19.4	13.7
5	18675.00	38.5 PK	74.0	-35.5	2.83 V	297	43.4	-4.9
6	18675.00	25.3 AV	54.0	-28.7	2.83 V	297	30.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.1 PK			2.36 H	36	105.0	6.1
2	*6385.00	98.2 AV			2.36 H	36	92.1	6.1
3	#12770.00	48.3 PK	88.2	-39.9	2.12 H	287	34.0	14.3
4	#12770.00	35.8 AV	68.2	-32.4	2.12 H	287	21.5	14.3
5	19155.00	36.0 PK	74.0	-38.0	3.51 H	124	39.8	-3.8
6	19155.00	24.5 AV	54.0	-29.5	3.51 H	124	28.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.3 PK			2.77 V	309	105.2	6.1
2	*6385.00	98.0 AV			2.77 V	309	91.9	6.1
3	#12770.00	46.0 PK	88.2	-42.2	3.90 V	348	31.7	14.3
4	#12770.00	33.8 AV	68.2	-34.4	3.90 V	348	19.5	14.3
5	19155.00	38.2 PK	74.0	-35.8	2.86 V	320	42.0	-3.8
6	19155.00	25.0 AV	54.0	-29.0	2.86 V	320	28.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.9 PK			2.43 H	49	104.6	6.3
2	*6465.00	98.1 AV			2.43 H	49	91.8	6.3
3	#12930.00	48.5 PK	88.2	-39.7	2.07 H	287	33.7	14.8
4	#12930.00	35.8 AV	68.2	-32.4	2.07 H	287	21.0	14.8
5	19395.00	37.1 PK	74.0	-36.9	3.53 H	132	40.8	-3.7
6	19395.00	25.1 AV	54.0	-28.9	3.53 H	132	28.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	111.1 PK			2.87 V	312	104.8	6.3
2	*6465.00	97.9 AV			2.87 V	312	91.6	6.3
3	#12930.00	45.5 PK	88.2	-42.7	3.89 V	338	30.7	14.8
4	#12930.00	33.3 AV	68.2	-34.9	3.89 V	338	18.5	14.8
5	19395.00	38.1 PK	74.0	-35.9	2.79 V	322	41.8	-3.7
6	19395.00	25.0 AV	54.0	-29.0	2.79 V	322	28.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.1 PK			2.36 H	20	104.2	6.9
2	*6545.00	98.3 AV			2.36 H	20	91.4	6.9
3	#13090.00	47.3 PK	88.2	-40.9	2.03 H	296	32.7	14.6
4	#13090.00	35.2 AV	68.2	-33.0	2.03 H	296	20.6	14.6
5	19635.00	36.5 PK	74.0	-37.5	3.52 H	141	40.5	-4.0
6	19635.00	24.6 AV	54.0	-29.4	3.52 H	141	28.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.5 PK			2.85 V	316	104.6	6.9
2	*6545.00	98.1 AV			2.85 V	316	91.2	6.9
3	#13090.00	46.0 PK	88.2	-42.2	3.88 V	348	31.4	14.6
4	#13090.00	33.8 AV	68.2	-34.4	3.88 V	348	19.2	14.6
5	19635.00	37.9 PK	74.0	-36.1	2.84 V	302	41.9	-4.0
6	19635.00	24.9 AV	54.0	-29.1	2.84 V	302	28.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.0 PK			2.44 H	38	104.3	6.7
2	*6625.00	98.5 AV			2.44 H	38	91.8	6.7
3	13250.00	48.0 PK	74.0	-26.0	2.10 H	285	33.0	15.0
4	13250.00	35.4 AV	54.0	-18.6	2.10 H	285	20.4	15.0
5	19875.00	36.4 PK	74.0	-37.6	3.54 H	146	39.9	-3.5
6	19875.00	24.9 AV	54.0	-29.1	3.54 H	146	28.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.6 PK			2.78 V	306	104.9	6.7
2	*6625.00	98.2 AV			2.78 V	306	91.5	6.7
3	13250.00	45.5 PK	74.0	-28.5	3.80 V	340	30.5	15.0
4	13250.00	33.2 AV	54.0	-20.8	3.80 V	340	18.2	15.0
5	19875.00	38.5 PK	74.0	-35.5	2.79 V	309	42.0	-3.5
6	19875.00	25.4 AV	54.0	-28.6	2.79 V	309	28.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.1 PK			2.42 H	42	104.1	7.0
2	*6705.00	98.4 AV			2.42 H	42	91.4	7.0
3	#13410.00	47.9 PK	88.2	-40.3	2.01 H	281	32.6	15.3
4	#13410.00	35.5 AV	68.2	-32.7	2.01 H	281	20.2	15.3
5	20115.00	36.7 PK	74.0	-37.3	3.60 H	139	40.2	-3.5
6	20115.00	24.8 AV	54.0	-29.2	3.60 H	139	28.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.2 PK			2.76 V	321	104.2	7.0
2	*6705.00	97.7 AV			2.76 V	321	90.7	7.0
3	#13410.00	45.9 PK	88.2	-42.3	3.83 V	333	30.6	15.3
4	#13410.00	33.5 AV	68.2	-34.7	3.83 V	333	18.2	15.3
5	20115.00	37.9 PK	74.0	-36.1	2.87 V	304	41.4	-3.5
6	20115.00	24.7 AV	54.0	-29.3	2.87 V	304	28.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.7 PK			2.43 H	42	103.6	7.1
2	*6785.00	98.3 AV			2.43 H	42	91.2	7.1
3	#13570.00	47.6 PK	88.2	-40.6	2.12 H	302	31.3	16.3
4	#13570.00	35.3 AV	68.2	-32.9	2.12 H	302	19.0	16.3
5	20355.00	36.7 PK	74.0	-37.3	3.60 H	132	39.8	-3.1
6	20355.00	25.0 AV	54.0	-29.0	3.60 H	132	28.1	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.8 PK			2.84 V	317	103.7	7.1
2	*6785.00	97.9 AV			2.84 V	317	90.8	7.1
3	#13570.00	45.8 PK	88.2	-42.4	3.81 V	329	29.5	16.3
4	#13570.00	33.6 AV	68.2	-34.6	3.81 V	329	17.3	16.3
5	20355.00	38.3 PK	74.0	-35.7	2.81 V	309	41.4	-3.1
6	20355.00	25.1 AV	54.0	-28.9	2.81 V	309	28.2	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.1 PK			2.37 H	47	104.0	7.1
2	*6865.00	98.3 AV			2.37 H	47	91.2	7.1
3	#13730.00	47.9 PK	88.2	-40.3	2.07 H	277	31.8	16.1
4	#13730.00	35.2 AV	68.2	-33.0	2.07 H	277	19.1	16.1
5	20595.00	36.4 PK	74.0	-37.6	3.52 H	143	39.7	-3.3
6	20595.00	25.0 AV	54.0	-29.0	3.52 H	143	28.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	111.3 PK			2.77 V	319	104.2	7.1
2	*6865.00	98.0 AV			2.77 V	319	90.9	7.1
3	#13730.00	45.6 PK	88.2	-42.6	3.81 V	331	29.5	16.1
4	#13730.00	33.0 AV	68.2	-35.2	3.81 V	331	16.9	16.1
5	20595.00	37.8 PK	74.0	-36.2	2.86 V	291	41.1	-3.3
6	20595.00	24.7 AV	54.0	-29.3	2.86 V	291	28.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.4 PK			2.40 H	21	102.9	7.5
2	*6945.00	97.7 AV			2.40 H	21	90.2	7.5
3	#13890.00	48.5 PK	88.2	-39.7	2.05 H	289	32.0	16.5
4	#13890.00	35.9 AV	68.2	-32.3	2.05 H	289	19.4	16.5
5	20835.00	36.1 PK	74.0	-37.9	3.52 H	133	39.0	-2.9
6	20835.00	24.5 AV	54.0	-29.5	3.52 H	133	27.4	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	111.1 PK			2.83 V	306	103.6	7.5
2	*6945.00	98.1 AV			2.83 V	306	90.6	7.5
3	#13890.00	45.5 PK	88.2	-42.7	3.82 V	351	29.0	16.5
4	#13890.00	32.9 AV	68.2	-35.3	3.82 V	351	16.4	16.5
5	20835.00	38.0 PK	74.0	-36.0	2.86 V	294	40.9	-2.9
6	20835.00	24.7 AV	54.0	-29.3	2.86 V	294	27.6	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.4 PK			1.03 H	24	101.1	8.3
2	*7025.00	98.5 AV			1.03 H	24	90.2	8.3
3	#7125.00	75.0 PK	88.2	-13.2	1.03 H	24	66.0	9.0
4	#7125.00	64.1 AV	68.2	-4.1	1.03 H	24	55.1	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.03 H	24	46.7	9.3
6	7250.00	44.8 AV	54.0	-9.2	1.03 H	24	35.5	9.3
7	#14050.00	48.7 PK	88.2	-39.5	2.10 H	298	32.1	16.6
8	#14050.00	36.1 AV	68.2	-32.1	2.10 H	298	19.5	16.6
9	21075.00	36.8 PK	74.0	-37.2	3.62 H	137	39.0	-2.2
10	21075.00	24.9 AV	54.0	-29.1	3.62 H	137	27.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.3 PK			1.21 V	302	103.0	8.3
2	*7025.00	99.0 AV			1.21 V	302	90.7	8.3
3	#7125.00	79.1 PK	88.2	-9.1	1.21 V	302	70.1	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.21 V	302	57.4	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.21 V	302	46.1	9.3
6	7250.00	44.4 AV	54.0	-9.6	1.21 V	302	35.1	9.3
7	#14050.00	45.6 PK	88.2	-42.6	3.84 V	324	29.0	16.6
8	#14050.00	33.5 AV	68.2	-34.7	3.84 V	324	16.9	16.6
9	21075.00	37.9 PK	74.0	-36.1	2.82 V	307	40.1	-2.2
10	21075.00	24.6 AV	54.0	-29.4	2.82 V	307	26.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.7 PK	88.2	-8.5	2.74 H	74	75.3	4.4
2	#5925.00	66.4 AV	68.2	-1.8	2.74 H	74	62.0	4.4
3	*6025.00	105.5 PK			2.74 H	74	101.0	4.5
4	*6025.00	93.4 AV			2.74 H	74	88.9	4.5
5	12050.00	48.7 PK	74.0	-25.3	2.05 H	305	34.6	14.1
6	12050.00	36.1 AV	54.0	-17.9	2.05 H	305	22.0	14.1
7	18075.00	36.9 PK	74.0	-37.1	3.55 H	121	41.6	-4.7
8	18075.00	25.0 AV	54.0	-29.0	3.55 H	121	29.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.56 V	288	74.6	4.4
2	#5925.00	64.0 AV	68.2	-4.2	1.56 V	288	59.6	4.4
3	*6025.00	104.2 PK			1.56 V	288	99.7	4.5
4	*6025.00	91.1 AV			1.56 V	288	86.6	4.5
5	12050.00	45.9 PK	74.0	-28.1	3.89 V	328	31.8	14.1
6	12050.00	33.7 AV	54.0	-20.3	3.89 V	328	19.6	14.1
7	18075.00	38.4 PK	74.0	-35.6	2.85 V	299	43.1	-4.7
8	18075.00	25.5 AV	54.0	-28.5	2.85 V	299	30.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.3 PK			2.46 H	38	100.5	4.8
2	*6185.00	92.9 AV			2.46 H	38	88.1	4.8
3	12370.00	48.1 PK	74.0	-25.9	2.09 H	282	34.1	14.0
4	12370.00	35.6 AV	54.0	-18.4	2.09 H	282	21.6	14.0
5	18555.00	36.4 PK	74.0	-37.6	3.61 H	135	41.3	-4.9
6	18555.00	24.6 AV	54.0	-29.4	3.61 H	135	29.5	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.7 PK			1.53 V	285	100.9	4.8
2	*6185.00	93.2 AV			1.53 V	285	88.4	4.8
3	12370.00	45.6 PK	74.0	-28.4	3.78 V	334	31.6	14.0
4	12370.00	33.2 AV	54.0	-20.8	3.78 V	334	19.2	14.0
5	18555.00	37.9 PK	74.0	-36.1	2.87 V	318	42.8	-4.9
6	18555.00	25.1 AV	54.0	-28.9	2.87 V	318	30.0	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.9 PK			2.45 H	52	99.9	6.0
2	*6345.00	93.4 AV			2.45 H	52	87.4	6.0
3	12690.00	48.5 PK	74.0	-25.5	2.06 H	284	34.4	14.1
4	12690.00	36.0 AV	54.0	-18.0	2.06 H	284	21.9	14.1
5	19035.00	36.8 PK	74.0	-37.2	3.54 H	125	40.7	-3.9
6	19035.00	25.0 AV	54.0	-29.0	3.54 H	125	28.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.4 PK			1.56 V	279	99.4	6.0
2	*6345.00	93.2 AV			1.56 V	279	87.2	6.0
3	12690.00	45.8 PK	74.0	-28.2	3.80 V	328	31.7	14.1
4	12690.00	33.5 AV	54.0	-20.5	3.80 V	328	19.4	14.1
5	19035.00	38.3 PK	74.0	-35.7	2.87 V	304	42.2	-3.9
6	19035.00	25.3 AV	54.0	-28.7	2.87 V	304	29.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.6 PK			2.43 H	37	98.9	6.7
2	*6505.00	93.3 AV			2.43 H	37	86.6	6.7
3	#13010.00	48.0 PK	88.2	-40.2	2.11 H	278	33.4	14.6
4	#13010.00	35.7 AV	68.2	-32.5	2.11 H	278	21.1	14.6
5	19515.00	36.1 PK	74.0	-37.9	3.56 H	121	40.2	-4.1
6	19515.00	24.3 AV	54.0	-29.7	3.56 H	121	28.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.4 PK			1.50 V	296	98.7	6.7
2	*6505.00	93.0 AV			1.50 V	296	86.3	6.7
3	#13010.00	46.2 PK	88.2	-42.0	3.83 V	335	31.6	14.6
4	#13010.00	33.8 AV	68.2	-34.4	3.83 V	335	19.2	14.6
5	19515.00	37.9 PK	74.0	-36.1	2.86 V	304	42.0	-4.1
6	19515.00	24.6 AV	54.0	-29.4	2.86 V	304	28.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			2.41 H	53	97.8	6.9
2	*6665.00	92.5 AV			2.41 H	53	85.6	6.9
3	13330.00	48.4 PK	74.0	-25.6	2.01 H	289	33.3	15.1
4	13330.00	36.0 AV	54.0	-18.0	2.01 H	289	20.9	15.1
5	19995.00	36.9 PK	74.0	-37.1	3.57 H	145	40.5	-3.6
6	19995.00	25.1 AV	54.0	-28.9	3.57 H	145	28.7	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			1.57 V	273	99.2	6.9
2	*6665.00	93.4 AV			1.57 V	273	86.5	6.9
3	13330.00	45.5 PK	74.0	-28.5	3.87 V	349	30.4	15.1
4	13330.00	33.3 AV	54.0	-20.7	3.87 V	349	18.2	15.1
5	19995.00	38.1 PK	74.0	-35.9	2.78 V	312	41.7	-3.6
6	19995.00	25.2 AV	54.0	-28.8	2.78 V	312	28.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.4 PK			2.42 H	27	98.4	7.0
2	*6825.00	92.9 AV			2.42 H	27	85.9	7.0
3	#13650.00	48.2 PK	88.2	-40.0	2.08 H	284	31.8	16.4
4	#13650.00	36.0 AV	68.2	-32.2	2.08 H	284	19.6	16.4
5	20475.00	36.3 PK	74.0	-37.7	3.57 H	121	39.5	-3.2
6	20475.00	24.4 AV	54.0	-29.6	3.57 H	121	27.6	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.4 PK			1.56 V	289	98.4	7.0
2	*6825.00	92.8 AV			1.56 V	289	85.8	7.0
3	#13650.00	45.9 PK	88.2	-42.3	3.82 V	341	29.5	16.4
4	#13650.00	33.3 AV	68.2	-34.9	3.82 V	341	16.9	16.4
5	20475.00	38.5 PK	74.0	-35.5	2.89 V	312	41.7	-3.2
6	20475.00	25.2 AV	54.0	-28.8	2.89 V	312	28.4	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.5 PK			1.04 H	23	98.6	7.9
2	*6985.00	95.1 AV			1.04 H	23	87.2	7.9
3	#7125.00	79.0 PK	88.2	-9.2	1.04 H	23	70.0	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.04 H	23	57.5	9.0
5	7250.00	63.1 PK	74.0	-10.9	1.04 H	23	53.8	9.3
6	7250.00	51.0 AV	54.0	-3.0	1.04 H	23	41.7	9.3
7	#13970.00	48.5 PK	88.2	-39.7	2.04 H	285	31.8	16.7
8	#13970.00	36.5 AV	68.2	-31.7	2.04 H	285	19.8	16.7
9	20955.00	36.0 PK	74.0	-38.0	3.51 H	120	38.7	-2.7
10	20955.00	23.9 AV	54.0	-30.1	3.51 H	120	26.6	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.1 PK			1.23 V	299	98.2	7.9
2	*6985.00	95.4 AV			1.23 V	299	87.5	7.9
3	#7125.00	80.0 PK	88.2	-8.2	1.23 V	299	71.0	9.0
4	#7125.00	64.9 AV	68.2	-3.3	1.23 V	299	55.9	9.0
5	7250.00	59.6 PK	74.0	-14.4	1.23 V	299	50.3	9.3
6	7250.00	48.3 AV	54.0	-5.7	1.23 V	299	39.0	9.3
7	#13970.00	45.3 PK	88.2	-42.9	3.85 V	324	28.6	16.7
8	#13970.00	33.3 AV	68.2	-34.9	3.85 V	324	16.6	16.7
9	20955.00	38.0 PK	74.0	-36.0	2.84 V	305	40.7	-2.7
10	20955.00	25.1 AV	54.0	-28.9	2.84 V	305	27.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

Mode B

2Tx NSS2(RU, MRU)

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.9 PK	88.2	-15.3	1.66 H	5	68.5	4.4
2	#5925.00	50.8 AV	68.2	-17.4	1.66 H	5	46.4	4.4
3	*5955.00	120.0 PK			1.66 H	5	115.5	4.5
4	*5955.00	108.0 AV			1.66 H	5	103.5	4.5
5	11910.00	58.1 PK	74.0	-15.9	2.06 H	291	44.4	13.7
6	11910.00	47.1 AV	54.0	-6.9	2.06 H	291	33.4	13.7
7	17865.00	67.7 PK	74.0	-6.3	3.79 H	287	43.4	24.3
8	17865.00	32.0 AV	54.0	-22.0	3.79 H	287	7.7	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.0 PK	88.2	-13.2	1.77 V	288	70.6	4.4
2	#5925.00	53.9 AV	68.2	-14.3	1.77 V	288	49.5	4.4
3	*5955.00	120.7 PK			1.77 V	288	116.2	4.5
4	*5955.00	110.0 AV			1.77 V	288	105.5	4.5
5	11910.00	57.7 PK	74.0	-16.3	2.03 V	304	44.0	13.7
6	11910.00	46.6 AV	54.0	-7.4	2.03 V	304	32.9	13.7
7	17865.00	67.4 PK	74.0	-6.6	3.76 V	278	43.1	24.3
8	17865.00	31.7 AV	54.0	-22.3	3.76 V	278	7.4	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			1.17 H	27	116.1	4.8
2	*6195.00	111.8 AV			1.17 H	27	107.0	4.8
3	12390.00	58.1 PK	74.0	-15.9	2.00 H	277	44.2	13.9
4	12390.00	46.9 AV	54.0	-7.1	2.00 H	277	33.0	13.9
5	18585.00	67.6 PK	74.0	-6.4	3.78 H	288	72.6	-5.0
6	18585.00	31.9 AV	54.0	-22.1	3.78 H	288	36.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.6 PK			1.79 V	276	115.8	4.8
2	*6195.00	110.0 AV			1.79 V	276	105.2	4.8
3	12390.00	58.4 PK	74.0	-15.6	2.02 V	297	44.5	13.9
4	12390.00	47.4 AV	54.0	-6.6	2.02 V	297	33.5	13.9
5	18585.00	67.4 PK	74.0	-6.6	3.75 V	290	72.4	-5.0
6	18585.00	32.0 AV	54.0	-22.0	3.75 V	290	37.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.4 PK			1.15 H	32	115.2	6.2
2	*6415.00	112.3 AV			1.15 H	32	106.1	6.2
3	#12830.00	58.7 PK	88.2	-29.5	2.09 H	297	44.2	14.5
4	#12830.00	47.6 AV	68.2	-20.6	2.09 H	297	33.1	14.5
5	19245.00	68.1 PK	74.0	-5.9	3.83 H	296	71.9	-3.8
6	19245.00	32.3 AV	54.0	-21.7	3.83 H	296	36.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.75 V	301	114.3	6.2
2	*6415.00	110.0 AV			1.75 V	301	103.8	6.2
3	#12830.00	58.4 PK	88.2	-29.8	2.11 V	295	43.9	14.5
4	#12830.00	47.6 AV	68.2	-20.6	2.11 V	295	33.1	14.5
5	19245.00	68.0 PK	74.0	-6.0	3.84 V	285	71.8	-3.8
6	19245.00	32.1 AV	54.0	-21.9	3.84 V	285	35.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.1 PK			1.16 H	29	114.9	6.2
2	*6435.00	112.2 AV			1.16 H	29	106.0	6.2
3	#12870.00	58.2 PK	88.2	-30.0	2.08 H	305	43.5	14.7
4	#12870.00	47.2 AV	68.2	-21.0	2.08 H	305	32.5	14.7
5	19305.00	67.4 PK	74.0	-6.6	3.85 H	293	71.1	-3.7
6	19305.00	31.7 AV	54.0	-22.3	3.85 H	293	35.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.2 PK			1.77 V	285	115.0	6.2
2	*6435.00	110.2 AV			1.77 V	285	104.0	6.2
3	#12870.00	57.9 PK	88.2	-30.3	2.02 V	301	43.2	14.7
4	#12870.00	46.8 AV	68.2	-21.4	2.02 V	301	32.1	14.7
5	19305.00	67.8 PK	74.0	-6.2	3.73 V	276	71.5	-3.7
6	19305.00	32.3 AV	54.0	-21.7	3.73 V	276	36.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.4 PK			1.12 H	40	114.0	6.4
2	*6475.00	111.3 AV			1.12 H	40	104.9	6.4
3	#12950.00	57.6 PK	88.2	-30.6	2.08 H	278	42.9	14.7
4	#12950.00	46.6 AV	68.2	-21.6	2.08 H	278	31.9	14.7
5	19425.00	67.9 PK	74.0	-6.1	3.82 H	297	71.7	-3.8
6	19425.00	32.5 AV	54.0	-21.5	3.82 H	297	36.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.4 PK			1.73 V	287	114.0	6.4
2	*6475.00	109.7 AV			1.73 V	287	103.3	6.4
3	#12950.00	57.9 PK	88.2	-30.3	2.03 V	294	43.2	14.7
4	#12950.00	47.0 AV	68.2	-21.2	2.03 V	294	32.3	14.7
5	19425.00	67.0 PK	74.0	-7.0	3.78 V	288	70.8	-3.8
6	19425.00	31.5 AV	54.0	-22.5	3.78 V	288	35.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.5 PK			1.12 H	26	113.8	6.7
2	*6515.00	111.5 AV			1.12 H	26	104.8	6.7
3	#13030.00	57.4 PK	88.2	-30.8	2.07 H	295	42.8	14.6
4	#13030.00	46.6 AV	68.2	-21.6	2.07 H	295	32.0	14.6
5	19545.00	67.7 PK	74.0	-6.3	3.79 H	276	71.8	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.79 H	276	35.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.8 PK			1.72 V	303	114.1	6.7
2	*6515.00	110.0 AV			1.72 V	303	103.3	6.7
3	#13030.00	58.4 PK	88.2	-29.8	2.08 V	302	43.8	14.6
4	#13030.00	47.5 AV	68.2	-20.7	2.08 V	302	32.9	14.6
5	19545.00	68.1 PK	74.0	-5.9	3.85 V	298	72.2	-4.1
6	19545.00	32.2 AV	54.0	-21.8	3.85 V	298	36.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.9 PK			1.18 H	30	114.1	6.8
2	*6535.00	111.7 AV			1.18 H	30	104.9	6.8
3	#13070.00	57.7 PK	88.2	-30.5	2.09 H	302	43.0	14.7
4	#13070.00	46.7 AV	68.2	-21.5	2.09 H	302	32.0	14.7
5	19605.00	68.1 PK	74.0	-5.9	3.78 H	281	72.1	-4.0
6	19605.00	32.1 AV	54.0	-21.9	3.78 H	281	36.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.2 PK			1.83 V	282	113.4	6.8
2	*6535.00	109.7 AV			1.83 V	282	102.9	6.8
3	#13070.00	58.3 PK	88.2	-29.9	2.11 V	284	43.6	14.7
4	#13070.00	47.0 AV	68.2	-21.2	2.11 V	284	32.3	14.7
5	19605.00	67.4 PK	74.0	-6.6	3.74 V	277	71.4	-4.0
6	19605.00	31.7 AV	54.0	-22.3	3.74 V	277	35.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.11 H	43	114.1	7.0
2	*6695.00	111.8 AV			1.11 H	43	104.8	7.0
3	13390.00	58.3 PK	74.0	-15.7	2.06 H	296	43.0	15.3
4	13390.00	47.3 AV	54.0	-6.7	2.06 H	296	32.0	15.3
5	20085.00	67.7 PK	74.0	-6.3	3.77 H	277	71.2	-3.5
6	20085.00	32.1 AV	54.0	-21.9	3.77 H	277	35.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			1.73 V	275	114.0	7.0
2	*6695.00	110.5 AV			1.73 V	275	103.5	7.0
3	13390.00	58.5 PK	74.0	-15.5	2.03 V	304	43.2	15.3
4	13390.00	47.4 AV	54.0	-6.6	2.03 V	304	32.1	15.3
5	20085.00	67.5 PK	74.0	-6.5	3.80 V	277	71.0	-3.5
6	20085.00	31.8 AV	54.0	-22.2	3.80 V	277	35.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.8 PK			1.18 H	38	113.8	7.0
2	*6855.00	111.7 AV			1.18 H	38	104.7	7.0
3	#13710.00	58.3 PK	88.2	-29.9	2.11 H	288	42.0	16.3
4	#13710.00	47.2 AV	68.2	-21.0	2.11 H	288	30.9	16.3
5	20565.00	67.3 PK	74.0	-6.7	3.82 H	279	70.6	-3.3
6	20565.00	31.9 AV	54.0	-22.1	3.82 H	279	35.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.3 PK			1.83 V	298	113.3	7.0
2	*6855.00	109.8 AV			1.83 V	298	102.8	7.0
3	#13710.00	58.6 PK	88.2	-29.6	2.08 V	285	42.3	16.3
4	#13710.00	47.5 AV	68.2	-20.7	2.08 V	285	31.2	16.3
5	20565.00	67.8 PK	74.0	-6.2	3.78 V	274	71.1	-3.3
6	20565.00	32.0 AV	54.0	-22.0	3.78 V	274	35.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.5 PK			1.14 H	16	113.4	7.1
2	*6875.00	111.4 AV			1.14 H	16	104.3	7.1
3	#13750.00	58.7 PK	88.2	-29.5	2.07 H	287	42.6	16.1
4	#13750.00	47.5 AV	68.2	-20.7	2.07 H	287	31.4	16.1
5	20625.00	67.9 PK	74.0	-6.1	3.80 H	296	71.2	-3.3
6	20625.00	32.1 AV	54.0	-21.9	3.80 H	296	35.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.1 PK			1.76 V	304	113.0	7.1
2	*6875.00	109.7 AV			1.76 V	304	102.6	7.1
3	#13750.00	58.5 PK	88.2	-29.7	2.04 V	301	42.4	16.1
4	#13750.00	47.6 AV	68.2	-20.6	2.04 V	301	31.5	16.1
5	20625.00	68.2 PK	74.0	-5.8	3.74 V	292	71.5	-3.3
6	20625.00	32.4 AV	54.0	-21.6	3.74 V	292	35.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.2 PK			1.22 H	35	113.3	7.9
2	*6995.00	112.0 AV			1.22 H	35	104.1	7.9
3	#13990.00	57.6 PK	88.2	-30.6	2.05 H	304	40.9	16.7
4	#13990.00	46.9 AV	68.2	-21.3	2.05 H	304	30.2	16.7
5	20985.00	67.0 PK	74.0	-7.0	3.75 H	296	69.8	-2.8
6	20985.00	31.6 AV	54.0	-22.4	3.75 H	296	34.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.1 PK			1.72 V	304	113.2	7.9
2	*6995.00	110.3 AV			1.72 V	304	102.4	7.9
3	#13990.00	58.1 PK	88.2	-30.1	2.11 V	301	41.4	16.7
4	#13990.00	46.9 AV	68.2	-21.3	2.11 V	301	30.2	16.7
5	20985.00	67.9 PK	74.0	-6.1	3.76 V	289	70.7	-2.8
6	20985.00	32.4 AV	54.0	-21.6	3.76 V	289	35.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.08 H	360	93.2	9.0
2	*7115.00	92.0 AV			1.08 H	360	83.0	9.0
3	#7125.00	86.6 PK	88.2	-1.6	1.08 H	360	77.6	9.0
4	#7125.00	60.1 AV	68.2	-8.1	1.08 H	360	51.1	9.0
5	7250.00	56.0 PK	74.0	-18.0	1.08 H	360	46.7	9.3
6	7250.00	36.7 AV	54.0	-17.3	1.08 H	360	27.4	9.3
7	#14230.00	57.9 PK	88.2	-30.3	2.07 H	288	41.0	16.9
8	#14230.00	46.7 AV	68.2	-21.5	2.07 H	288	29.8	16.9
9	21345.00	67.5 PK	74.0	-6.5	3.77 H	284	69.1	-1.6
10	21345.00	31.6 AV	54.0	-22.4	3.77 H	284	33.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			1.56 V	289	92.7	9.0
2	*7115.00	90.5 AV			1.56 V	289	81.5	9.0
3	#7125.00	83.2 PK	88.2	-5.0	1.56 V	289	74.2	9.0
4	#7125.00	58.5 AV	68.2	-9.7	1.56 V	289	49.5	9.0
5	7250.00	56.8 PK	74.0	-17.2	1.56 V	289	47.5	9.3
6	7250.00	43.6 AV	54.0	-10.4	1.56 V	289	34.3	9.3
7	#14230.00	57.8 PK	88.2	-30.4	2.04 V	297	40.9	16.9
8	#14230.00	46.8 AV	68.2	-21.4	2.04 V	297	29.9	16.9
9	21345.00	67.8 PK	74.0	-6.2	3.78 V	294	69.4	-1.6
10	21345.00	31.9 AV	54.0	-22.1	3.78 V	294	33.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.5 PK	88.2	-13.7	1.42 H	5	70.1	4.4
2	#5925.00	55.6 AV	68.2	-12.6	1.42 H	5	51.2	4.4
3	*5955.00	119.3 PK			1.42 H	5	114.8	4.5
4	*5955.00	108.0 AV			1.42 H	5	103.5	4.5
5	11910.00	56.8 PK	74.0	-17.2	2.04 H	291	43.1	13.7
6	11910.00	45.2 AV	54.0	-8.8	2.04 H	291	31.5	13.7
7	17865.00	58.5 PK	74.0	-15.5	2.13 H	276	34.2	24.3
8	17865.00	47.1 AV	54.0	-6.9	2.13 H	276	22.8	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.2 PK	88.2	-13.0	1.68 V	288	70.8	4.4
2	#5925.00	57.8 AV	68.2	-10.4	1.68 V	288	53.4	4.4
3	*5955.00	120.6 PK			1.68 V	288	116.1	4.5
4	*5955.00	109.7 AV			1.68 V	288	105.2	4.5
5	11910.00	57.6 PK	74.0	-16.4	2.07 V	290	43.9	13.7
6	11910.00	46.9 AV	54.0	-7.1	2.07 V	290	33.2	13.7
7	17865.00	67.9 PK	74.0	-6.1	3.76 V	275	43.6	24.3
8	17865.00	32.3 AV	54.0	-21.7	3.76 V	275	8.0	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.1 PK			2.22 H	30	116.3	4.8
2	*6195.00	110.7 AV			2.22 H	30	105.9	4.8
3	12390.00	57.2 PK	74.0	-16.8	2.07 H	293	43.3	13.9
4	12390.00	45.6 AV	54.0	-8.4	2.07 H	293	31.7	13.9
5	18585.00	58.4 PK	74.0	-15.6	2.13 H	279	63.4	-5.0
6	18585.00	46.9 AV	54.0	-7.1	2.13 H	279	51.9	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.5 PK			1.82 V	272	115.7	4.8
2	*6195.00	109.9 AV			1.82 V	272	105.1	4.8
3	12390.00	58.8 PK	74.0	-15.2	2.09 V	291	44.9	13.9
4	12390.00	47.6 AV	54.0	-6.4	2.09 V	291	33.7	13.9
5	18585.00	67.9 PK	74.0	-6.1	3.83 V	272	72.9	-5.0
6	18585.00	32.3 AV	54.0	-21.7	3.83 V	272	37.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			2.24 H	42	114.6	6.2
2	*6415.00	110.3 AV			2.24 H	42	104.1	6.2
3	#12830.00	56.4 PK	88.2	-31.8	2.09 H	287	41.9	14.5
4	#12830.00	44.9 AV	68.2	-23.3	2.09 H	287	30.4	14.5
5	19245.00	58.2 PK	74.0	-15.8	2.07 H	273	62.0	-3.8
6	19245.00	46.9 AV	54.0	-7.1	2.07 H	273	50.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.8 PK			1.80 V	277	114.6	6.2
2	*6415.00	110.4 AV			1.80 V	277	104.2	6.2
3	#12830.00	58.4 PK	88.2	-29.8	2.11 V	287	43.9	14.5
4	#12830.00	47.4 AV	68.2	-20.8	2.11 V	287	32.9	14.5
5	19245.00	67.3 PK	74.0	-6.7	3.73 V	274	71.1	-3.8
6	19245.00	31.9 AV	54.0	-22.1	3.73 V	274	35.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	120.9 PK			2.24 H	45	114.7	6.2
2	*6435.00	110.7 AV			2.24 H	45	104.5	6.2
3	#12870.00	56.6 PK	88.2	-31.6	2.10 H	289	41.9	14.7
4	#12870.00	44.9 AV	68.2	-23.3	2.10 H	289	30.2	14.7
5	19305.00	58.4 PK	74.0	-15.6	2.11 H	285	62.1	-3.7
6	19305.00	46.7 AV	54.0	-7.3	2.11 H	285	50.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.1 PK			1.75 V	296	114.9	6.2
2	*6435.00	110.5 AV			1.75 V	296	104.3	6.2
3	#12870.00	58.2 PK	88.2	-30.0	2.06 V	282	43.5	14.7
4	#12870.00	47.1 AV	68.2	-21.1	2.06 V	282	32.4	14.7
5	19305.00	67.5 PK	74.0	-6.5	3.76 V	294	71.2	-3.7
6	19305.00	31.7 AV	54.0	-22.3	3.76 V	294	35.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.2 PK			2.27 H	44	114.8	6.4
2	*6475.00	110.9 AV			2.27 H	44	104.5	6.4
3	#12950.00	57.0 PK	88.2	-31.2	2.04 H	299	42.3	14.7
4	#12950.00	45.6 AV	68.2	-22.6	2.04 H	299	30.9	14.7
5	19425.00	58.9 PK	74.0	-15.1	2.10 H	279	62.7	-3.8
6	19425.00	47.2 AV	54.0	-6.8	2.10 H	279	51.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.3 PK			1.76 V	299	114.9	6.4
2	*6475.00	110.4 AV			1.76 V	299	104.0	6.4
3	#12950.00	58.1 PK	88.2	-30.1	2.06 V	300	43.4	14.7
4	#12950.00	46.8 AV	68.2	-21.4	2.06 V	300	32.1	14.7
5	19425.00	67.4 PK	74.0	-6.6	3.84 V	292	71.2	-3.8
6	19425.00	31.8 AV	54.0	-22.2	3.84 V	292	35.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.6 PK			2.16 H	16	113.9	6.7
2	*6515.00	110.3 AV			2.16 H	16	103.6	6.7
3	#13030.00	57.0 PK	88.2	-31.2	2.08 H	300	42.4	14.6
4	#13030.00	45.6 AV	68.2	-22.6	2.08 H	300	31.0	14.6
5	19545.00	58.3 PK	74.0	-15.7	2.15 H	286	62.4	-4.1
6	19545.00	47.1 AV	54.0	-6.9	2.15 H	286	51.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.1 PK			1.75 V	303	113.4	6.7
2	*6515.00	109.6 AV			1.75 V	303	102.9	6.7
3	#13030.00	57.8 PK	88.2	-30.4	2.02 V	277	43.2	14.6
4	#13030.00	46.9 AV	68.2	-21.3	2.02 V	277	32.3	14.6
5	19545.00	67.6 PK	74.0	-6.4	3.80 V	273	71.7	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.80 V	273	35.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			2.22 H	18	114.8	6.8
2	*6535.00	111.0 AV			2.22 H	18	104.2	6.8
3	#13070.00	56.4 PK	88.2	-31.8	2.05 H	302	41.7	14.7
4	#13070.00	45.0 AV	68.2	-23.2	2.05 H	302	30.3	14.7
5	19605.00	58.0 PK	74.0	-16.0	2.10 H	289	62.0	-4.0
6	19605.00	46.9 AV	54.0	-7.1	2.10 H	289	50.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.8 PK			1.83 V	298	114.0	6.8
2	*6535.00	110.0 AV			1.83 V	298	103.2	6.8
3	#13070.00	58.1 PK	88.2	-30.1	2.02 V	286	43.4	14.7
4	#13070.00	46.9 AV	68.2	-21.3	2.02 V	286	32.2	14.7
5	19605.00	67.3 PK	74.0	-6.7	3.73 V	294	71.3	-4.0
6	19605.00	31.9 AV	54.0	-22.1	3.73 V	294	35.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			2.23 H	44	114.0	7.0
2	*6695.00	110.5 AV			2.23 H	44	103.5	7.0
3	13390.00	56.8 PK	74.0	-17.2	2.05 H	276	41.5	15.3
4	13390.00	45.4 AV	54.0	-8.6	2.05 H	276	30.1	15.3
5	20085.00	58.0 PK	74.0	-16.0	2.14 H	291	61.5	-3.5
6	20085.00	46.6 AV	54.0	-7.4	2.14 H	291	50.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.6 PK			1.75 V	301	113.6	7.0
2	*6695.00	109.8 AV			1.75 V	301	102.8	7.0
3	13390.00	58.7 PK	74.0	-15.3	2.07 V	300	43.4	15.3
4	13390.00	47.5 AV	54.0	-6.5	2.07 V	300	32.2	15.3
5	20085.00	68.0 PK	74.0	-6.0	3.81 V	277	71.5	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.81 V	277	35.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.0 PK			2.25 H	40	114.0	7.0
2	*6855.00	110.6 AV			2.25 H	40	103.6	7.0
3	#13710.00	57.3 PK	88.2	-30.9	2.05 H	275	41.0	16.3
4	#13710.00	45.7 AV	68.2	-22.5	2.05 H	275	29.4	16.3
5	20565.00	59.0 PK	74.0	-15.0	2.10 H	291	62.3	-3.3
6	20565.00	47.5 AV	54.0	-6.5	2.10 H	291	50.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.0 PK			1.81 V	298	113.0	7.0
2	*6855.00	109.5 AV			1.81 V	298	102.5	7.0
3	#13710.00	57.9 PK	88.2	-30.3	2.08 V	276	41.6	16.3
4	#13710.00	46.8 AV	68.2	-21.4	2.08 V	276	30.5	16.3
5	20565.00	67.6 PK	74.0	-6.4	3.77 V	296	70.9	-3.3
6	20565.00	31.9 AV	54.0	-22.1	3.77 V	296	35.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.6 PK			2.20 H	38	114.5	7.1
2	*6875.00	111.0 AV			2.20 H	38	103.9	7.1
3	#13750.00	56.6 PK	88.2	-31.6	2.08 H	292	40.5	16.1
4	#13750.00	44.9 AV	68.2	-23.3	2.08 H	292	28.8	16.1
5	20625.00	58.7 PK	74.0	-15.3	2.09 H	284	62.0	-3.3
6	20625.00	47.3 AV	54.0	-6.7	2.09 H	284	50.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.2 PK			1.75 V	289	114.1	7.1
2	*6875.00	110.4 AV			1.75 V	289	103.3	7.1
3	#13750.00	57.6 PK	88.2	-30.6	2.06 V	284	41.5	16.1
4	#13750.00	46.6 AV	68.2	-21.6	2.06 V	284	30.5	16.1
5	20625.00	67.5 PK	74.0	-6.5	3.80 V	293	70.8	-3.3
6	20625.00	31.6 AV	54.0	-22.4	3.80 V	293	34.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.5 PK			2.18 H	38	112.6	7.9
2	*6995.00	110.4 AV			2.18 H	38	102.5	7.9
3	#13990.00	56.7 PK	88.2	-31.5	2.08 H	305	40.0	16.7
4	#13990.00	44.8 AV	68.2	-23.4	2.08 H	305	28.1	16.7
5	20985.00	58.3 PK	74.0	-15.7	2.08 H	288	61.1	-2.8
6	20985.00	47.0 AV	54.0	-7.0	2.08 H	288	49.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.9 PK			1.81 V	283	113.0	7.9
2	*6995.00	110.2 AV			1.81 V	283	102.3	7.9
3	#13990.00	58.6 PK	88.2	-29.6	2.10 V	306	41.9	16.7
4	#13990.00	47.5 AV	68.2	-20.7	2.10 V	306	30.8	16.7
5	20985.00	67.5 PK	74.0	-6.5	3.84 V	290	70.3	-2.8
6	20985.00	31.9 AV	54.0	-22.1	3.84 V	290	34.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.6 PK			1.12 H	17	92.6	9.0
2	*7115.00	90.2 AV			1.12 H	17	81.2	9.0
3	#7125.00	86.4 PK	88.2	-1.8	1.12 H	17	77.4	9.0
4	#7125.00	59.2 AV	68.2	-9.0	1.12 H	17	50.2	9.0
5	7250.00	55.1 PK	74.0	-18.9	1.12 H	17	45.8	9.3
6	7250.00	43.6 AV	54.0	-10.4	1.12 H	17	34.3	9.3
7	#14230.00	56.7 PK	88.2	-31.5	2.10 H	297	39.8	16.9
8	#14230.00	45.3 AV	68.2	-22.9	2.10 H	297	28.4	16.9
9	21345.00	58.9 PK	74.0	-15.1	2.18 H	281	60.5	-1.6
10	21345.00	47.4 AV	54.0	-6.6	2.18 H	281	49.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.6 PK			1.20 V	301	91.6	9.0
2	*7115.00	93.1 AV			1.20 V	301	84.1	9.0
3	#7125.00	83.2 PK	88.2	-5.0	1.20 V	301	74.2	9.0
4	#7125.00	58.3 AV	68.2	-9.9	1.20 V	301	49.3	9.0
5	7250.00	56.3 PK	74.0	-17.7	1.20 V	301	47.0	9.3
6	7250.00	45.0 AV	54.0	-9.0	1.20 V	301	35.7	9.3
7	#14230.00	58.4 PK	88.2	-29.8	2.04 V	286	41.5	16.9
8	#14230.00	47.5 AV	68.2	-20.7	2.04 V	286	30.6	16.9
9	21345.00	67.2 PK	74.0	-6.8	3.85 V	272	68.8	-1.6
10	21345.00	31.6 AV	54.0	-22.4	3.85 V	272	33.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.6 PK	88.2	-16.6	1.42 H	124	67.2	4.4
2	#5925.00	49.9 AV	68.2	-18.3	1.42 H	124	45.5	4.4
3	*5955.00	117.7 PK			1.42 H	124	113.2	4.5
4	*5955.00	105.7 AV			1.42 H	124	101.2	4.5
5	11910.00	58.1 PK	74.0	-15.9	2.02 H	306	44.4	13.7
6	11910.00	47.3 AV	54.0	-6.7	2.02 H	306	33.6	13.7
7	17865.00	68.0 PK	74.0	-6.0	3.77 H	274	43.7	24.3
8	17865.00	32.0 AV	54.0	-22.0	3.77 H	274	7.7	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.0 PK	88.2	-18.2	1.53 V	289	65.6	4.4
2	#5925.00	55.1 AV	68.2	-13.1	1.53 V	289	50.7	4.4
3	*5955.00	118.5 PK			1.53 V	289	114.0	4.5
4	*5955.00	108.5 AV			1.53 V	289	104.0	4.5
5	11910.00	57.8 PK	74.0	-16.2	2.02 V	304	44.1	13.7
6	11910.00	46.8 AV	54.0	-7.2	2.02 V	304	33.1	13.7
7	17865.00	67.5 PK	74.0	-6.5	3.79 V	296	43.2	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.79 V	296	7.6	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.8 PK			2.33 H	29	114.0	4.8
2	*6195.00	107.1 AV			2.33 H	29	102.3	4.8
3	12390.00	58.1 PK	74.0	-15.9	2.08 H	293	44.2	13.9
4	12390.00	47.1 AV	54.0	-6.9	2.08 H	293	33.2	13.9
5	18585.00	68.2 PK	74.0	-5.8	3.74 H	294	73.2	-5.0
6	18585.00	32.3 AV	54.0	-21.7	3.74 H	294	37.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.0 PK			1.51 V	296	113.2	4.8
2	*6195.00	108.2 AV			1.51 V	296	103.4	4.8
3	12390.00	58.1 PK	74.0	-15.9	2.03 V	297	44.2	13.9
4	12390.00	47.3 AV	54.0	-6.7	2.03 V	297	33.4	13.9
5	18585.00	67.7 PK	74.0	-6.3	3.83 V	284	72.7	-5.0
6	18585.00	32.2 AV	54.0	-21.8	3.83 V	284	37.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			2.35 H	26	112.3	6.2
2	*6415.00	106.9 AV			2.35 H	26	100.7	6.2
3	#12830.00	58.2 PK	88.2	-30.0	2.10 H	292	43.7	14.5
4	#12830.00	47.2 AV	68.2	-21.0	2.10 H	292	32.7	14.5
5	19245.00	67.8 PK	74.0	-6.2	3.79 H	301	71.6	-3.8
6	19245.00	32.1 AV	54.0	-21.9	3.79 H	301	35.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.0 PK			1.48 V	284	112.8	6.2
2	*6415.00	108.9 AV			1.48 V	284	102.7	6.2
3	#12830.00	58.7 PK	88.2	-29.5	2.05 V	291	44.2	14.5
4	#12830.00	47.6 AV	68.2	-20.6	2.05 V	291	33.1	14.5
5	19245.00	67.3 PK	74.0	-6.7	3.83 V	280	71.1	-3.8
6	19245.00	31.5 AV	54.0	-22.5	3.83 V	280	35.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.1 PK			2.33 H	35	112.9	6.2
2	*6435.00	107.3 AV			2.33 H	35	101.1	6.2
3	#12870.00	58.0 PK	88.2	-30.2	2.05 H	295	43.3	14.7
4	#12870.00	47.0 AV	68.2	-21.2	2.05 H	295	32.3	14.7
5	19305.00	67.5 PK	74.0	-6.5	3.79 H	285	71.2	-3.7
6	19305.00	31.7 AV	54.0	-22.3	3.79 H	285	35.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	118.2 PK			1.58 V	296	112.0	6.2
2	*6435.00	108.2 AV			1.58 V	296	102.0	6.2
3	#12870.00	58.6 PK	88.2	-29.6	2.11 V	283	43.9	14.7
4	#12870.00	47.5 AV	68.2	-20.7	2.11 V	283	32.8	14.7
5	19305.00	67.9 PK	74.0	-6.1	3.81 V	271	71.6	-3.7
6	19305.00	32.3 AV	54.0	-21.7	3.81 V	271	36.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.8 PK			2.32 H	18	112.4	6.4
2	*6475.00	107.2 AV			2.32 H	18	100.8	6.4
3	#12950.00	58.2 PK	88.2	-30.0	2.01 H	283	43.5	14.7
4	#12950.00	46.9 AV	68.2	-21.3	2.01 H	283	32.2	14.7
5	19425.00	67.6 PK	74.0	-6.4	3.83 H	285	71.4	-3.8
6	19425.00	32.1 AV	54.0	-21.9	3.83 H	285	35.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.6 PK			1.49 V	285	112.2	6.4
2	*6475.00	108.8 AV			1.49 V	285	102.4	6.4
3	#12950.00	58.0 PK	88.2	-30.2	2.01 V	280	43.3	14.7
4	#12950.00	46.8 AV	68.2	-21.4	2.01 V	280	32.1	14.7
5	19425.00	68.4 PK	74.0	-5.6	3.80 V	290	72.2	-3.8
6	19425.00	32.4 AV	54.0	-21.6	3.80 V	290	36.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.9 PK			2.27 H	43	112.2	6.7
2	*6515.00	107.4 AV			2.27 H	43	100.7	6.7
3	#13030.00	57.5 PK	88.2	-30.7	2.04 H	283	42.9	14.6
4	#13030.00	46.6 AV	68.2	-21.6	2.04 H	283	32.0	14.6
5	19545.00	67.5 PK	74.0	-6.5	3.77 H	283	71.6	-4.1
6	19545.00	31.6 AV	54.0	-22.4	3.77 H	283	35.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	118.1 PK			1.59 V	296	111.4	6.7
2	*6515.00	108.1 AV			1.59 V	296	101.4	6.7
3	#13030.00	57.9 PK	88.2	-30.3	2.03 V	295	43.3	14.6
4	#13030.00	46.9 AV	68.2	-21.3	2.03 V	295	32.3	14.6
5	19545.00	67.2 PK	74.0	-6.8	3.74 V	290	71.3	-4.1
6	19545.00	31.8 AV	54.0	-22.2	3.74 V	290	35.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.2 PK			2.32 H	14	112.4	6.8
2	*6535.00	107.4 AV			2.32 H	14	100.6	6.8
3	#13070.00	58.8 PK	88.2	-29.4	2.08 H	290	44.1	14.7
4	#13070.00	47.5 AV	68.2	-20.7	2.08 H	290	32.8	14.7
5	19605.00	68.0 PK	74.0	-6.0	3.83 H	272	72.0	-4.0
6	19605.00	32.5 AV	54.0	-21.5	3.83 H	272	36.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.9 PK			1.47 V	298	112.1	6.8
2	*6535.00	108.9 AV			1.47 V	298	102.1	6.8
3	#13070.00	58.1 PK	88.2	-30.1	2.05 V	298	43.4	14.7
4	#13070.00	47.4 AV	68.2	-20.8	2.05 V	298	32.7	14.7
5	19605.00	68.1 PK	74.0	-5.9	3.75 V	300	72.1	-4.0
6	19605.00	32.2 AV	54.0	-21.8	3.75 V	300	36.2	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.3 PK			2.36 H	41	111.3	7.0
2	*6695.00	106.8 AV			2.36 H	41	99.8	7.0
3	13390.00	58.4 PK	74.0	-15.6	2.00 H	282	43.1	15.3
4	13390.00	47.5 AV	54.0	-6.5	2.00 H	282	32.2	15.3
5	20085.00	67.7 PK	74.0	-6.3	3.81 H	297	71.2	-3.5
6	20085.00	31.9 AV	54.0	-22.1	3.81 H	297	35.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.6 PK			1.49 V	285	111.6	7.0
2	*6695.00	108.6 AV			1.49 V	285	101.6	7.0
3	13390.00	58.1 PK	74.0	-15.9	2.10 V	304	42.8	15.3
4	13390.00	47.2 AV	54.0	-6.8	2.10 V	304	31.9	15.3
5	20085.00	67.8 PK	74.0	-6.2	3.74 V	286	71.3	-3.5
6	20085.00	32.0 AV	54.0	-22.0	3.74 V	286	35.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.9 PK			2.33 H	26	111.9	7.0
2	*6855.00	107.2 AV			2.33 H	26	100.2	7.0
3	#13710.00	58.5 PK	88.2	-29.7	2.11 H	287	42.2	16.3
4	#13710.00	47.5 AV	68.2	-20.7	2.11 H	287	31.2	16.3
5	20565.00	68.0 PK	74.0	-6.0	3.81 H	290	71.3	-3.3
6	20565.00	32.4 AV	54.0	-21.6	3.81 H	290	35.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.6 PK			1.47 V	283	111.6	7.0
2	*6855.00	108.7 AV			1.47 V	283	101.7	7.0
3	#13710.00	58.2 PK	88.2	-30.0	2.05 V	298	41.9	16.3
4	#13710.00	47.1 AV	68.2	-21.1	2.05 V	298	30.8	16.3
5	20565.00	67.6 PK	74.0	-6.4	3.81 V	276	70.9	-3.3
6	20565.00	31.7 AV	54.0	-22.3	3.81 V	276	35.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.8 PK			2.33 H	41	111.7	7.1
2	*6875.00	107.3 AV			2.33 H	41	100.2	7.1
3	#13750.00	57.9 PK	88.2	-30.3	2.11 H	295	41.8	16.1
4	#13750.00	46.7 AV	68.2	-21.5	2.11 H	295	30.6	16.1
5	20625.00	67.9 PK	74.0	-6.1	3.79 H	297	71.2	-3.3
6	20625.00	32.3 AV	54.0	-21.7	3.79 H	297	35.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	118.5 PK			1.48 V	284	111.4	7.1
2	*6875.00	108.6 AV			1.48 V	284	101.5	7.1
3	#13750.00	58.6 PK	88.2	-29.6	2.08 V	284	42.5	16.1
4	#13750.00	47.4 AV	68.2	-20.8	2.08 V	284	31.3	16.1
5	20625.00	67.8 PK	74.0	-6.2	3.84 V	284	71.1	-3.3
6	20625.00	32.3 AV	54.0	-21.7	3.84 V	284	35.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	119.4 PK			2.29 H	40	111.5	7.9
2	*6995.00	107.5 AV			2.29 H	40	99.6	7.9
3	#13990.00	58.4 PK	88.2	-29.8	2.09 H	299	41.7	16.7
4	#13990.00	47.5 AV	68.2	-20.7	2.09 H	299	30.8	16.7
5	20985.00	67.3 PK	74.0	-6.7	3.79 H	273	70.1	-2.8
6	20985.00	31.6 AV	54.0	-22.4	3.79 H	273	34.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	118.1 PK			1.55 V	292	110.2	7.9
2	*6995.00	108.4 AV			1.55 V	292	100.5	7.9
3	#13990.00	57.7 PK	88.2	-30.5	2.01 V	304	41.0	16.7
4	#13990.00	46.8 AV	68.2	-21.4	2.01 V	304	30.1	16.7
5	20985.00	67.3 PK	74.0	-6.7	3.82 V	290	70.1	-2.8
6	20985.00	31.6 AV	54.0	-22.4	3.82 V	290	34.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.1 PK			1.06 H	15	95.1	9.0
2	*7115.00	92.5 AV			1.06 H	15	83.5	9.0
3	#7125.00	86.7 PK	88.2	-1.5	1.06 H	15	77.7	9.0
4	#7125.00	58.8 AV	68.2	-9.4	1.06 H	15	49.8	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.06 H	15	46.1	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.06 H	15	34.4	9.3
7	#14230.00	58.2 PK	88.2	-30.0	2.01 H	294	41.3	16.9
8	#14230.00	47.4 AV	68.2	-20.8	2.01 H	294	30.5	16.9
9	21345.00	67.2 PK	74.0	-6.8	3.78 H	278	68.8	-1.6
10	21345.00	31.7 AV	54.0	-22.3	3.78 H	278	33.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.30 V	305	93.2	9.0
2	*7115.00	93.5 AV			1.30 V	305	84.5	9.0
3	#7125.00	84.1 PK	88.2	-4.1	1.30 V	305	75.1	9.0
4	#7125.00	56.9 AV	68.2	-11.3	1.30 V	305	47.9	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.30 V	305	46.6	9.3
6	7250.00	44.9 AV	54.0	-9.1	1.30 V	305	35.6	9.3
7	#14230.00	58.8 PK	88.2	-29.4	2.06 V	296	41.9	16.9
8	#14230.00	47.5 AV	68.2	-20.7	2.06 V	296	30.6	16.9
9	21345.00	67.9 PK	74.0	-6.1	3.84 V	272	69.5	-1.6
10	21345.00	32.1 AV	54.0	-21.9	3.84 V	272	33.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.3 PK	88.2	-10.9	3.00 H	75	72.9	4.4
2	#5925.00	48.2 AV	68.2	-20.0	3.00 H	75	43.8	4.4
3	*5955.00	120.0 PK			3.00 H	75	115.5	4.5
4	*5955.00	110.2 AV			3.00 H	75	105.7	4.5
5	11910.00	58.0 PK	74.0	-16.0	2.01 H	283	44.3	13.7
6	11910.00	46.9 AV	54.0	-7.1	2.01 H	283	33.2	13.7
7	17865.00	68.0 PK	74.0	-6.0	3.74 H	271	43.7	24.3
8	17865.00	32.4 AV	54.0	-21.6	3.74 H	271	8.1	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.5 PK	88.2	-12.7	1.52 V	289	71.1	4.4
2	#5925.00	50.6 AV	68.2	-17.6	1.52 V	289	46.2	4.4
3	*5955.00	119.5 PK			1.52 V	289	115.0	4.5
4	*5955.00	110.0 AV			1.52 V	289	105.5	4.5
5	11910.00	57.2 PK	74.0	-16.8	2.01 V	305	43.5	13.7
6	11910.00	46.4 AV	54.0	-7.6	2.01 V	305	32.7	13.7
7	17865.00	68.0 PK	74.0	-6.0	3.79 V	288	43.7	24.3
8	17865.00	32.5 AV	54.0	-21.5	3.79 V	288	8.2	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.2 PK			1.49 H	13	112.8	6.4
2	*6475.00	109.0 AV			1.49 H	13	102.6	6.4
3	#12950.00	58.4 PK	88.2	-29.8	2.10 H	288	43.7	14.7
4	#12950.00	47.5 AV	68.2	-20.7	2.10 H	288	32.8	14.7
5	19425.00	67.5 PK	74.0	-6.5	3.80 H	277	71.3	-3.8
6	19425.00	32.0 AV	54.0	-22.0	3.80 H	277	35.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.7 PK			1.55 V	290	113.3	6.4
2	*6475.00	109.9 AV			1.55 V	290	103.5	6.4
3	#12950.00	58.1 PK	88.2	-30.1	2.01 V	287	43.4	14.7
4	#12950.00	47.2 AV	68.2	-21.0	2.01 V	287	32.5	14.7
5	19425.00	68.9 PK	74.0	-5.1	3.72 V	275	72.7	-3.8
6	19425.00	32.9 AV	54.0	-21.1	3.72 V	275	36.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			1.50 H	22	111.8	7.0
2	*6695.00	108.5 AV			1.50 H	22	101.5	7.0
3	13390.00	57.9 PK	74.0	-16.1	2.06 H	292	42.6	15.3
4	13390.00	46.7 AV	54.0	-7.3	2.06 H	292	31.4	15.3
5	20085.00	68.4 PK	74.0	-5.6	3.85 H	298	71.9	-3.5
6	20085.00	32.5 AV	54.0	-21.5	3.85 H	298	36.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.0 PK			1.47 V	278	112.0	7.0
2	*6695.00	109.5 AV			1.47 V	278	102.5	7.0
3	13390.00	57.6 PK	74.0	-16.4	1.97 V	288	42.3	15.3
4	13390.00	46.7 AV	54.0	-7.3	1.97 V	288	31.4	15.3
5	20085.00	68.0 PK	74.0	-6.0	3.73 V	271	71.5	-3.5
6	20085.00	32.5 AV	54.0	-21.5	3.73 V	271	36.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	115.6 PK			1.20 H	17	106.6	9.0
2	*7115.00	106.6 AV			1.20 H	17	97.6	9.0
3	#7125.00	84.5 PK	88.2	-3.7	1.20 H	17	75.5	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.20 H	17	57.4	9.0
5	7250.00	55.4 PK	74.0	-18.6	1.20 H	17	46.1	9.3
6	7250.00	45.3 AV	54.0	-8.7	1.20 H	17	36.0	9.3
7	#14230.00	58.3 PK	88.2	-29.9	2.12 H	295	41.4	16.9
8	#14230.00	47.4 AV	68.2	-20.8	2.12 H	295	30.5	16.9
9	21345.00	68.3 PK	74.0	-5.7	3.80 H	302	69.9	-1.6
10	21345.00	32.3 AV	54.0	-21.7	3.80 H	302	33.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	114.0 PK			1.84 V	291	105.0	9.0
2	*7115.00	105.1 AV			1.84 V	291	96.1	9.0
3	#7125.00	82.9 PK	88.2	-5.3	1.84 V	291	73.9	9.0
4	#7125.00	64.8 AV	68.2	-3.4	1.84 V	291	55.8	9.0
5	7250.00	55.1 PK	74.0	-18.9	1.84 V	291	45.8	9.3
6	7250.00	45.2 AV	54.0	-8.8	1.84 V	291	35.9	9.3
7	#14230.00	57.3 PK	88.2	-30.9	1.95 V	281	40.4	16.9
8	#14230.00	46.6 AV	68.2	-21.6	1.95 V	281	29.7	16.9
9	21345.00	68.1 PK	74.0	-5.9	3.81 V	290	69.7	-1.6
10	21345.00	32.4 AV	54.0	-21.6	3.81 V	290	34.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.8 PK	88.2	-17.4	1.40 H	5	66.4	4.4
2	#5925.00	48.7 AV	68.2	-19.5	1.40 H	5	44.3	4.4
3	*5955.00	115.3 PK			1.40 H	5	110.8	4.5
4	*5955.00	103.6 AV			1.40 H	5	99.1	4.5
5	11910.00	57.6 PK	74.0	-16.4	2.02 H	299	43.9	13.7
6	11910.00	46.8 AV	54.0	-7.2	2.02 H	299	33.1	13.7
7	17865.00	67.6 PK	74.0	-6.4	3.79 H	303	43.3	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.79 H	303	7.6	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	1.56 V	289	63.6	4.4
2	#5925.00	54.0 AV	68.2	-14.2	1.56 V	289	49.6	4.4
3	*5955.00	116.8 PK			1.56 V	289	112.3	4.5
4	*5955.00	107.3 AV			1.56 V	289	102.8	4.5
5	11910.00	57.9 PK	74.0	-16.1	2.08 V	302	44.2	13.7
6	11910.00	47.0 AV	54.0	-7.0	2.08 V	302	33.3	13.7
7	17865.00	67.5 PK	74.0	-6.5	3.75 V	286	43.2	24.3
8	17865.00	31.9 AV	54.0	-22.1	3.75 V	286	7.6	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.6 PK			2.25 H	35	111.2	6.4
2	*6475.00	106.2 AV			2.25 H	35	99.8	6.4
3	#12950.00	57.9 PK	88.2	-30.3	2.02 H	287	43.2	14.7
4	#12950.00	47.2 AV	68.2	-21.0	2.02 H	287	32.5	14.7
5	19425.00	67.3 PK	74.0	-6.7	3.76 H	280	71.1	-3.8
6	19425.00	31.7 AV	54.0	-22.3	3.76 H	280	35.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.5 PK			1.61 V	277	110.1	6.4
2	*6475.00	107.0 AV			1.61 V	277	100.6	6.4
3	#12950.00	57.6 PK	88.2	-30.6	2.00 V	284	42.9	14.7
4	#12950.00	46.8 AV	68.2	-21.4	2.00 V	284	32.1	14.7
5	19425.00	67.7 PK	74.0	-6.3	3.80 V	272	71.5	-3.8
6	19425.00	31.9 AV	54.0	-22.1	3.80 V	272	35.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.3 PK			2.22 H	21	111.3	7.0
2	*6695.00	106.9 AV			2.22 H	21	99.9	7.0
3	13390.00	57.4 PK	74.0	-16.6	2.12 H	291	42.1	15.3
4	13390.00	46.6 AV	54.0	-7.4	2.12 H	291	31.3	15.3
5	20085.00	67.9 PK	74.0	-6.1	3.79 H	297	71.4	-3.5
6	20085.00	32.2 AV	54.0	-21.8	3.79 H	297	35.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.58 V	295	109.8	7.0
2	*6695.00	107.4 AV			1.58 V	295	100.4	7.0
3	13390.00	57.4 PK	74.0	-16.6	2.00 V	294	42.1	15.3
4	13390.00	46.7 AV	54.0	-7.3	2.00 V	294	31.4	15.3
5	20085.00	68.2 PK	74.0	-5.8	3.77 V	276	71.7	-3.5
6	20085.00	32.5 AV	54.0	-21.5	3.77 V	276	36.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.3 PK			1.00 H	18	91.3	9.0
2	*7115.00	90.6 AV			1.00 H	18	81.6	9.0
3	#7125.00	86.7 PK	88.2	-1.5	1.00 H	18	77.7	9.0
4	#7125.00	57.7 AV	68.2	-10.5	1.00 H	18	48.7	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.00 H	18	46.6	9.3
6	7250.00	43.7 AV	54.0	-10.3	1.00 H	18	34.4	9.3
7	#14230.00	58.2 PK	88.2	-30.0	2.03 H	293	41.3	16.9
8	#14230.00	47.4 AV	68.2	-20.8	2.03 H	293	30.5	16.9
9	21345.00	67.7 PK	74.0	-6.3	3.83 H	295	69.3	-1.6
10	21345.00	32.0 AV	54.0	-22.0	3.83 H	295	33.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.2 PK			2.53 V	244	92.2	9.0
2	*7115.00	92.1 AV			2.53 V	244	83.1	9.0
3	#7125.00	84.1 PK	88.2	-4.1	2.53 V	244	75.1	9.0
4	#7125.00	56.2 AV	68.2	-12.0	2.53 V	244	47.2	9.0
5	7250.00	55.6 PK	74.0	-18.4	2.53 V	244	46.3	9.3
6	7250.00	45.1 AV	54.0	-8.9	2.53 V	244	35.8	9.3
7	#14230.00	57.5 PK	88.2	-30.7	1.95 V	303	40.6	16.9
8	#14230.00	46.5 AV	68.2	-21.7	1.95 V	303	29.6	16.9
9	21345.00	68.5 PK	74.0	-5.5	3.82 V	288	70.1	-1.6
10	21345.00	32.6 AV	54.0	-21.4	3.82 V	288	34.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.4 PK	88.2	-9.8	1.57 H	5	74.0	4.4
2	#5925.00	64.1 AV	68.2	-4.1	1.57 H	5	59.7	4.4
3	*5985.00	108.0 PK			1.57 H	5	103.4	4.6
4	*5985.00	94.2 AV			1.57 H	5	89.6	4.6
5	11970.00	58.0 PK	74.0	-16.0	2.03 H	302	44.2	13.8
6	11970.00	47.1 AV	54.0	-6.9	2.03 H	302	33.3	13.8
7	17955.00	68.2 PK	74.0	-5.8	3.80 H	282	41.5	26.7
8	17955.00	32.5 AV	54.0	-21.5	3.80 H	282	5.8	26.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.3 PK	88.2	-6.9	1.58 V	289	76.9	4.4
2	#5925.00	66.7 AV	68.2	-1.5	1.58 V	289	62.3	4.4
3	*5985.00	108.0 PK			1.58 V	289	103.4	4.6
4	*5985.00	95.7 AV			1.58 V	289	91.1	4.6
5	11970.00	57.0 PK	74.0	-17.0	2.01 V	304	43.2	13.8
6	11970.00	46.6 AV	54.0	-7.4	2.01 V	304	32.8	13.8
7	17955.00	68.6 PK	74.0	-5.4	3.73 V	279	41.9	26.7
8	17955.00	32.6 AV	54.0	-21.4	3.73 V	279	5.9	26.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.0 PK			2.07 H	40	105.7	6.3
2	*6465.00	99.8 AV			2.07 H	40	93.5	6.3
3	#12930.00	58.0 PK	88.2	-30.2	2.10 H	285	43.2	14.8
4	#12930.00	46.7 AV	68.2	-21.5	2.10 H	285	31.9	14.8
5	19395.00	67.6 PK	74.0	-6.4	3.81 H	286	71.3	-3.7
6	19395.00	32.0 AV	54.0	-22.0	3.81 H	286	35.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.3 PK			1.63 V	296	102.0	6.3
2	*6465.00	95.9 AV			1.63 V	296	89.6	6.3
3	#12930.00	57.4 PK	88.2	-30.8	2.01 V	309	42.6	14.8
4	#12930.00	47.0 AV	68.2	-21.2	2.01 V	309	32.2	14.8
5	19395.00	68.6 PK	74.0	-5.4	3.79 V	288	72.3	-3.7
6	19395.00	32.8 AV	54.0	-21.2	3.79 V	288	36.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.3 PK			2.15 H	36	105.3	7.0
2	*6705.00	99.9 AV			2.15 H	36	92.9	7.0
3	#13410.00	57.6 PK	88.2	-30.6	2.02 H	291	42.3	15.3
4	#13410.00	46.7 AV	68.2	-21.5	2.02 H	291	31.4	15.3
5	20115.00	67.5 PK	74.0	-6.5	3.77 H	294	71.0	-3.5
6	20115.00	32.0 AV	54.0	-22.0	3.77 H	294	35.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.9 PK			1.58 V	276	100.9	7.0
2	*6705.00	95.4 AV			1.58 V	276	88.4	7.0
3	#13410.00	57.4 PK	88.2	-30.8	1.95 V	292	42.1	15.3
4	#13410.00	46.9 AV	68.2	-21.3	1.95 V	292	31.6	15.3
5	20115.00	68.6 PK	74.0	-5.4	3.77 V	266	72.1	-3.5
6	20115.00	32.7 AV	54.0	-21.3	3.77 V	266	36.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.3 PK			1.04 H	24	102.0	8.3
2	*7025.00	99.6 AV			1.04 H	24	91.3	8.3
3	#7125.00	77.1 PK	88.2	-11.1	1.04 H	24	68.1	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.04 H	24	57.5	9.0
5	7250.00	56.1 PK	74.0	-17.9	1.04 H	24	46.8	9.3
6	7250.00	44.3 AV	54.0	-9.7	1.04 H	24	35.0	9.3
7	#14050.00	58.4 PK	88.2	-29.8	2.03 H	293	41.8	16.6
8	#14050.00	47.5 AV	68.2	-20.7	2.03 H	293	30.9	16.6
9	21075.00	68.1 PK	74.0	-5.9	3.77 H	300	70.3	-2.2
10	21075.00	32.2 AV	54.0	-21.8	3.77 H	300	34.4	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.9 PK			1.20 V	300	103.6	8.3
2	*7025.00	100.9 AV			1.20 V	300	92.6	8.3
3	#7125.00	77.7 PK	88.2	-10.5	1.20 V	300	68.7	9.0
4	#7125.00	66.4 AV	68.2	-1.8	1.20 V	300	57.4	9.0
5	7250.00	55.9 PK	74.0	-18.1	1.20 V	300	46.6	9.3
6	7250.00	44.3 AV	54.0	-9.7	1.20 V	300	35.0	9.3
7	#14050.00	57.9 PK	88.2	-30.3	2.06 V	294	41.3	16.6
8	#14050.00	47.2 AV	68.2	-21.0	2.06 V	294	30.6	16.6
9	21075.00	68.7 PK	74.0	-5.3	3.81 V	273	70.9	-2.2
10	21075.00	32.9 AV	54.0	-21.1	3.81 V	273	35.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.7 PK	88.2	-8.5	3.08 H	28	75.3	4.4
2	#5925.00	65.5 AV	68.2	-2.7	3.08 H	28	61.1	4.4
3	*6025.00	103.5 PK			3.06 H	30	99.0	4.5
4	*6025.00	92.1 AV			3.06 H	30	87.6	4.5
5	12050.00	58.1 PK	74.0	-15.9	2.07 H	281	44.0	14.1
6	12050.00	47.2 AV	54.0	-6.8	2.07 H	281	33.1	14.1
7	18075.00	67.7 PK	74.0	-6.3	3.82 H	301	72.4	-4.7
8	18075.00	31.8 AV	54.0	-22.2	3.82 H	301	36.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.2 PK	88.2	-8.0	1.48 V	287	75.8	4.4
2	#5925.00	66.6 AV	68.2	-1.6	1.48 V	287	62.2	4.4
3	*6025.00	105.9 PK			1.48 V	287	101.4	4.5
4	*6025.00	93.2 AV			1.48 V	287	88.7	4.5
5	12050.00	57.5 PK	74.0	-16.5	2.04 V	296	43.4	14.1
6	12050.00	47.0 AV	54.0	-7.0	2.04 V	296	32.9	14.1
7	18075.00	68.6 PK	74.0	-5.4	3.80 V	280	73.3	-4.7
8	18075.00	32.9 AV	54.0	-21.1	3.80 V	280	37.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.9 PK			1.37 H	20	101.2	6.7
2	*6505.00	95.9 AV			1.37 H	20	89.2	6.7
3	#13010.00	58.0 PK	88.2	-30.2	2.06 H	307	43.4	14.6
4	#13010.00	47.3 AV	68.2	-20.9	2.06 H	307	32.7	14.6
5	19515.00	68.2 PK	74.0	-5.8	3.78 H	276	72.3	-4.1
6	19515.00	32.4 AV	54.0	-21.6	3.78 H	276	36.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.2 PK			1.49 V	287	99.5	6.7
2	*6505.00	93.5 AV			1.49 V	287	86.8	6.7
3	#13010.00	57.7 PK	88.2	-30.5	2.02 V	295	43.1	14.6
4	#13010.00	46.9 AV	68.2	-21.3	2.02 V	295	32.3	14.6
5	19515.00	68.6 PK	74.0	-5.4	3.74 V	273	72.7	-4.1
6	19515.00	32.8 AV	54.0	-21.2	3.74 V	273	36.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.1 PK			1.35 H	47	101.2	6.9
2	*6665.00	96.3 AV			1.35 H	47	89.4	6.9
3	13330.00	58.6 PK	74.0	-15.4	2.04 H	279	43.5	15.1
4	13330.00	47.3 AV	54.0	-6.7	2.04 H	279	32.2	15.1
5	19995.00	68.2 PK	74.0	-5.8	3.83 H	282	71.8	-3.6
6	19995.00	32.3 AV	54.0	-21.7	3.83 H	282	35.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.2 PK			1.51 V	302	99.3	6.9
2	*6665.00	93.5 AV			1.51 V	302	86.6	6.9
3	13330.00	57.1 PK	74.0	-16.9	1.94 V	303	42.0	15.1
4	13330.00	46.7 AV	54.0	-7.3	1.94 V	303	31.6	15.1
5	19995.00	67.7 PK	74.0	-6.3	3.78 V	271	71.3	-3.6
6	19995.00	32.2 AV	54.0	-21.8	3.78 V	271	35.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.6 PK			1.02 H	21	98.7	7.9
2	*6985.00	97.6 AV			1.02 H	21	89.7	7.9
3	#7125.00	80.3 PK	88.2	-7.9	1.02 H	21	71.3	9.0
4	#7125.00	65.9 AV	68.2	-2.3	1.02 H	21	56.9	9.0
5	7250.00	61.6 PK	74.0	-12.4	1.02 H	21	52.3	9.3
6	7250.00	50.7 AV	54.0	-3.3	1.02 H	21	41.4	9.3
7	#13970.00	58.1 PK	88.2	-30.1	2.09 H	285	41.4	16.7
8	#13970.00	47.1 AV	68.2	-21.1	2.09 H	285	30.4	16.7
9	20955.00	67.3 PK	74.0	-6.7	3.77 H	287	70.0	-2.7
10	20955.00	31.8 AV	54.0	-22.2	3.77 H	287	34.5	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	108.2 PK			1.20 V	300	100.3	7.9
2	*6985.00	97.1 AV			1.20 V	300	89.2	7.9
3	#7125.00	78.9 PK	88.2	-9.3	1.20 V	300	69.9	9.0
4	#7125.00	63.4 AV	68.2	-4.8	1.20 V	300	54.4	9.0
5	7250.00	60.6 PK	74.0	-13.4	1.20 V	300	51.3	9.3
6	7250.00	48.2 AV	54.0	-5.8	1.20 V	300	38.9	9.3
7	#13970.00	57.1 PK	88.2	-31.1	1.95 V	290	40.4	16.7
8	#13970.00	46.2 AV	68.2	-22.0	1.95 V	290	29.5	16.7
9	20955.00	68.4 PK	74.0	-5.6	3.75 V	268	71.1	-2.7
10	20955.00	32.5 AV	54.0	-21.5	3.75 V	268	35.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	2.37 H	39	73.8	4.4
2	#5925.00	66.5 AV	68.2	-1.7	2.37 H	39	62.1	4.4
3	*6025.00	105.4 PK			2.37 H	39	100.9	4.5
4	*6025.00	94.2 AV			2.37 H	39	89.7	4.5
5	12050.00	58.5 PK	74.0	-15.5	2.05 H	280	44.4	14.1
6	12050.00	47.2 AV	54.0	-6.8	2.05 H	280	33.1	14.1
7	18075.00	67.5 PK	74.0	-6.5	3.75 H	291	72.2	-4.7
8	18075.00	31.7 AV	54.0	-22.3	3.75 H	291	36.4	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.36 V	288	77.9	4.4
2	#5925.00	66.2 AV	68.2	-2.0	1.36 V	288	61.8	4.4
3	*6025.00	104.0 PK			1.36 V	288	99.5	4.5
4	*6025.00	92.5 AV			1.36 V	288	88.0	4.5
5	12050.00	57.7 PK	74.0	-16.3	2.04 V	297	43.6	14.1
6	12050.00	46.8 AV	54.0	-7.2	2.04 V	297	32.7	14.1
7	18075.00	68.1 PK	74.0	-5.9	3.78 V	264	72.8	-4.7
8	18075.00	32.2 AV	54.0	-21.8	3.78 V	264	36.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	108.0 PK			1.42 H	23	101.3	6.7
2	*6505.00	96.0 AV			1.42 H	23	89.3	6.7
3	#13010.00	58.4 PK	88.2	-29.8	2.12 H	304	43.8	14.6
4	#13010.00	47.2 AV	68.2	-21.0	2.12 H	304	32.6	14.6
5	19515.00	67.3 PK	74.0	-6.7	3.78 H	282	71.4	-4.1
6	19515.00	31.7 AV	54.0	-22.3	3.78 H	282	35.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.9 PK			1.37 V	272	97.2	6.7
2	*6505.00	92.6 AV			1.37 V	272	85.9	6.7
3	#13010.00	57.4 PK	88.2	-30.8	2.03 V	298	42.8	14.6
4	#13010.00	46.7 AV	68.2	-21.5	2.03 V	298	32.1	14.6
5	19515.00	67.7 PK	74.0	-6.3	3.72 V	274	71.8	-4.1
6	19515.00	32.3 AV	54.0	-21.7	3.72 V	274	36.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.4 PK			1.38 H	15	100.5	6.9
2	*6665.00	95.4 AV			1.38 H	15	88.5	6.9
3	13330.00	58.1 PK	74.0	-15.9	2.11 H	307	43.0	15.1
4	13330.00	46.8 AV	54.0	-7.2	2.11 H	307	31.7	15.1
5	19995.00	67.0 PK	74.0	-7.0	3.84 H	275	70.6	-3.6
6	19995.00	31.5 AV	54.0	-22.5	3.84 H	275	35.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.4 PK			1.33 V	287	96.5	6.9
2	*6665.00	92.2 AV			1.33 V	287	85.3	6.9
3	13330.00	56.9 PK	74.0	-17.1	1.98 V	297	41.8	15.1
4	13330.00	46.3 AV	54.0	-7.7	1.98 V	297	31.2	15.1
5	19995.00	68.4 PK	74.0	-5.6	3.75 V	264	72.0	-3.6
6	19995.00	32.5 AV	54.0	-21.5	3.75 V	264	36.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Louis Yang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.5 PK			1.02 H	24	99.6	7.9
2	*6985.00	96.7 AV			1.02 H	24	88.8	7.9
3	#7125.00	78.6 PK	88.2	-9.6	1.02 H	24	69.6	9.0
4	#7125.00	66.5 AV	68.2	-1.7	1.02 H	24	57.5	9.0
5	7250.00	64.0 PK	74.0	-10.0	1.02 H	24	54.7	9.3
6	7250.00	51.0 AV	54.0	-3.0	1.02 H	24	41.7	9.3
7	#13970.00	58.2 PK	88.2	-30.0	2.01 H	307	41.5	16.7
8	#13970.00	47.4 AV	68.2	-20.8	2.01 H	307	30.7	16.7
9	20955.00	67.0 PK	74.0	-7.0	3.78 H	295	69.7	-2.7
10	20955.00	31.6 AV	54.0	-22.4	3.78 H	295	34.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.8 PK			1.22 V	300	98.9	7.9
2	*6985.00	97.7 AV			1.22 V	300	89.8	7.9
3	#7125.00	78.9 PK	88.2	-9.3	1.22 V	300	69.9	9.0
4	#7125.00	66.6 AV	68.2	-1.6	1.22 V	300	57.6	9.0
5	7250.00	60.8 PK	74.0	-13.2	1.22 V	300	51.5	9.3
6	7250.00	49.9 AV	54.0	-4.1	1.22 V	300	40.6	9.3
7	#13970.00	57.2 PK	88.2	-31.0	1.96 V	299	40.5	16.7
8	#13970.00	46.4 AV	68.2	-21.8	1.96 V	299	29.7	16.7
9	20955.00	68.3 PK	74.0	-5.7	3.71 V	277	71.0	-2.7
10	20955.00	32.4 AV	54.0	-21.6	3.71 V	277	35.1	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge
 Mode A
 1Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

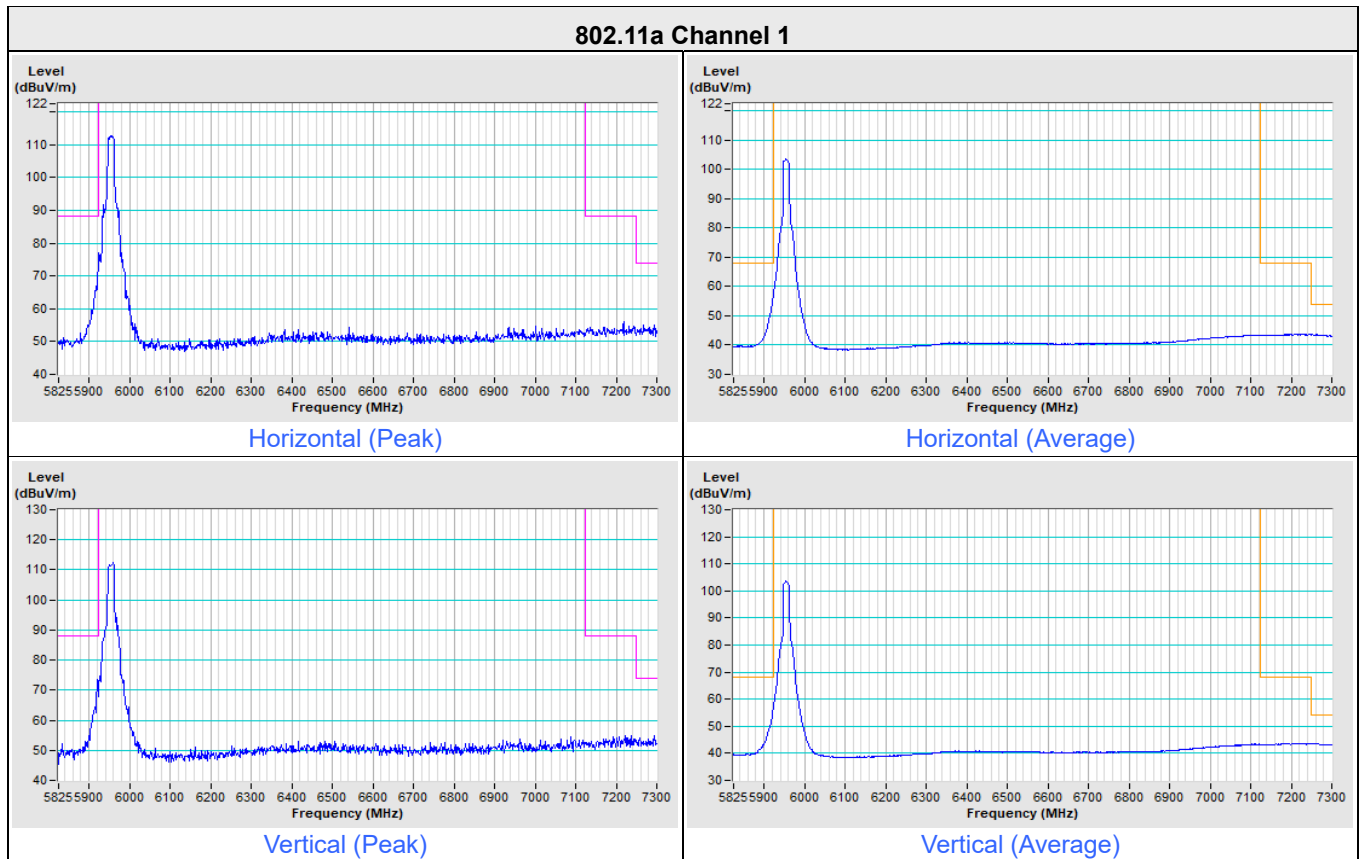


802.11a Channel 233

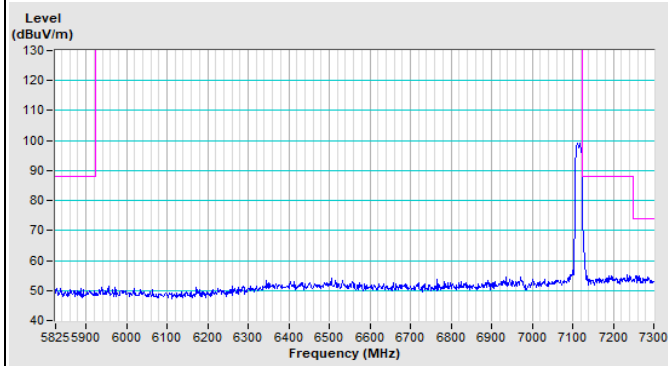


Horizontal (Peak)

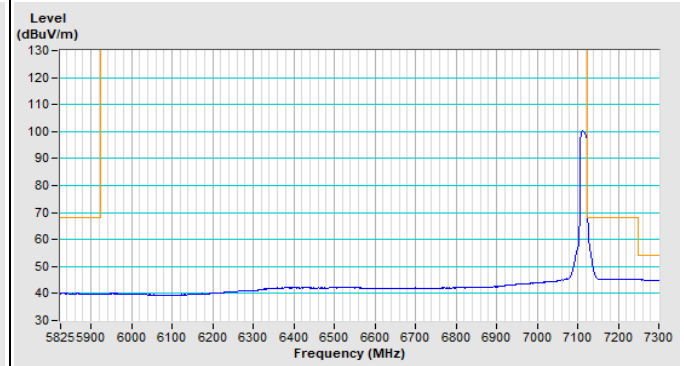

Horizontal (Average)

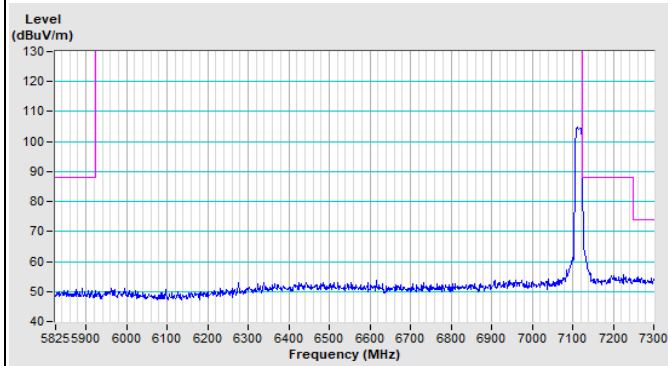


Vertical (Peak)

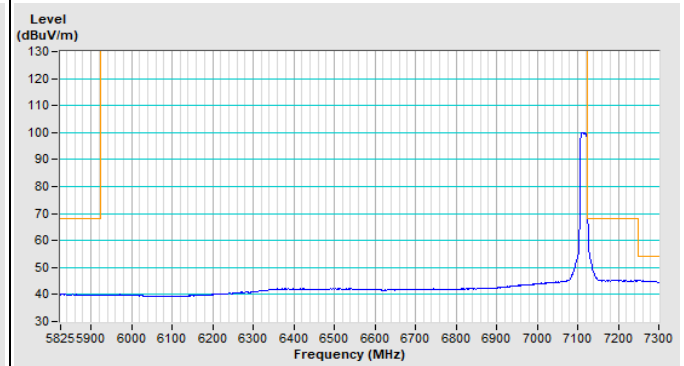


Vertical (Average)

1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

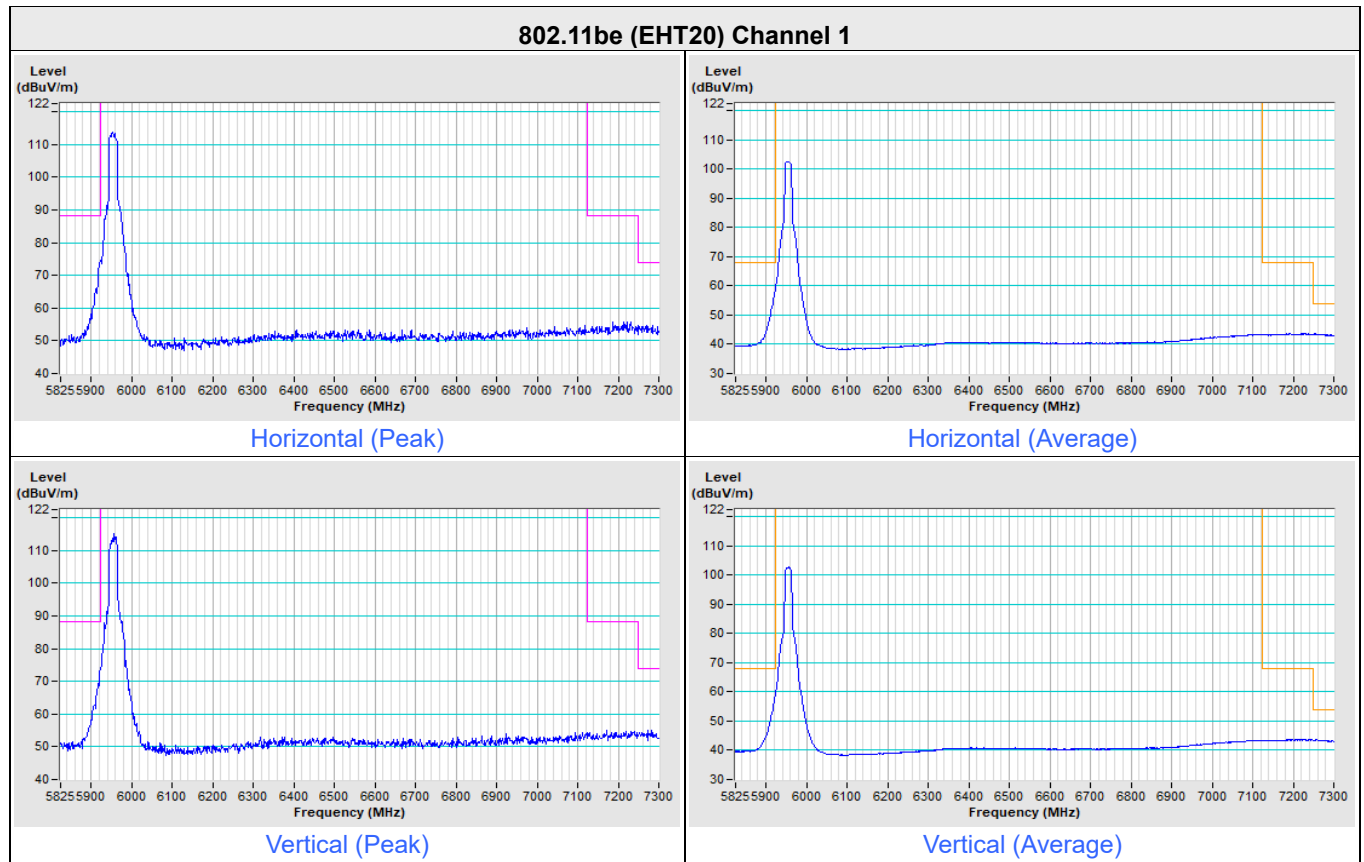


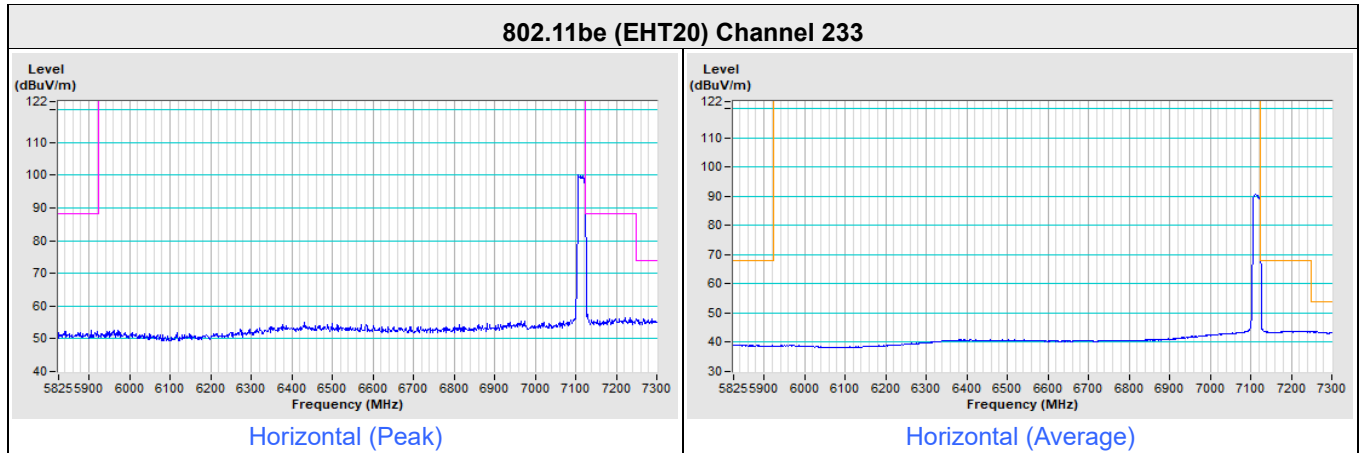


For Integration method:




Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

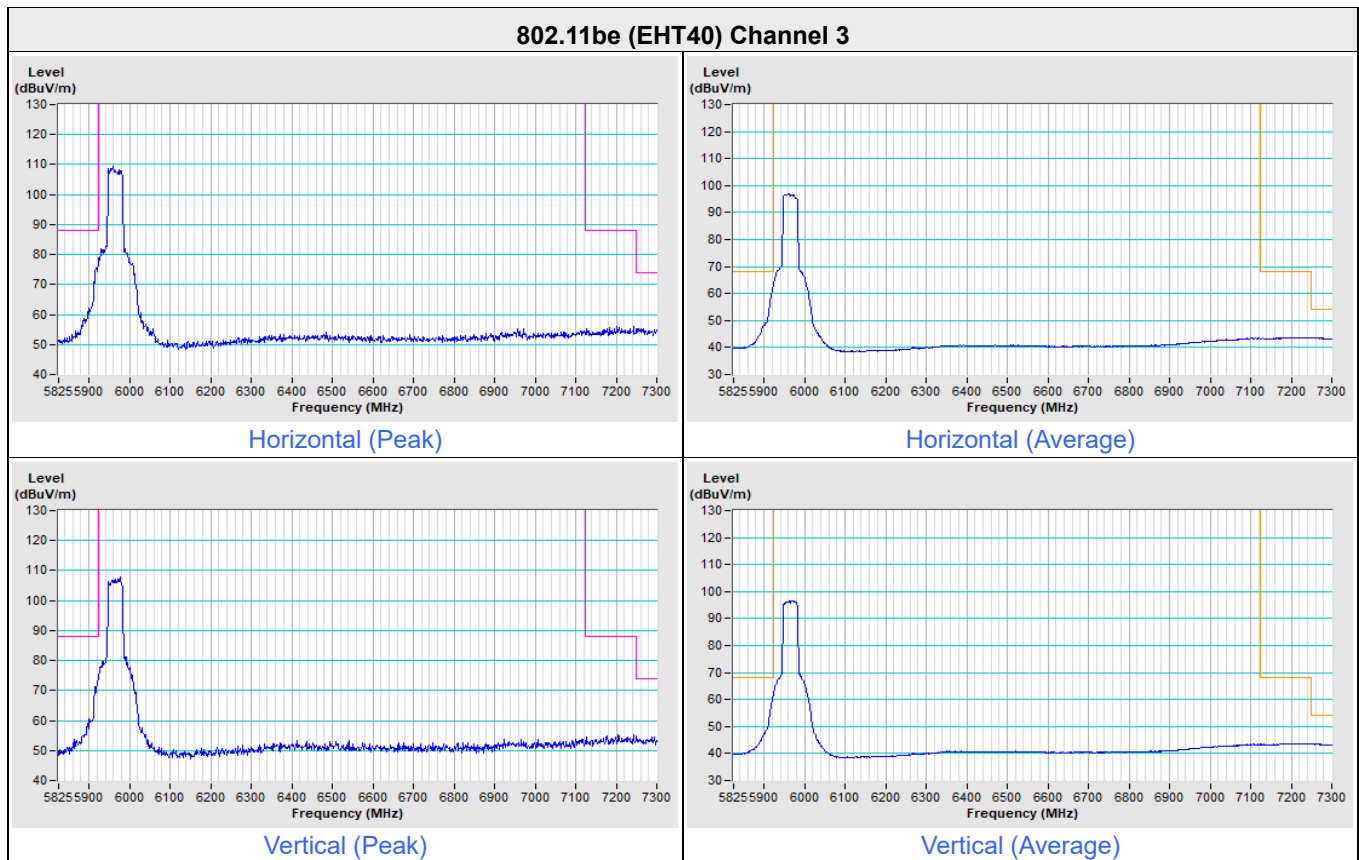


802.11be (EHT40) Channel 227

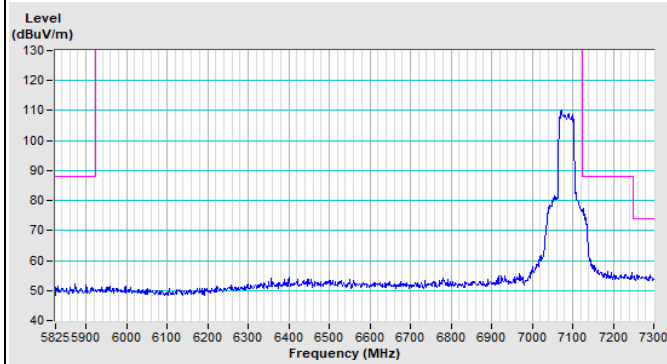


Horizontal (Peak)

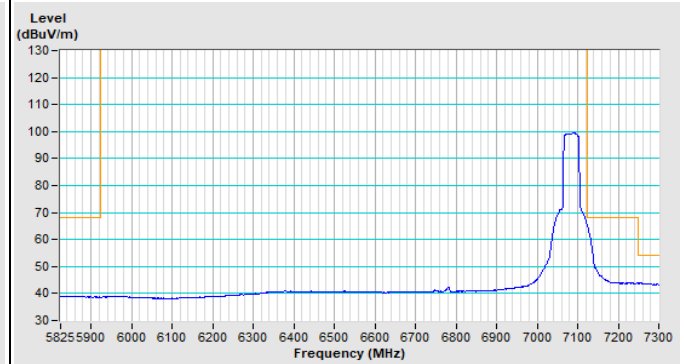

Horizontal (Average)

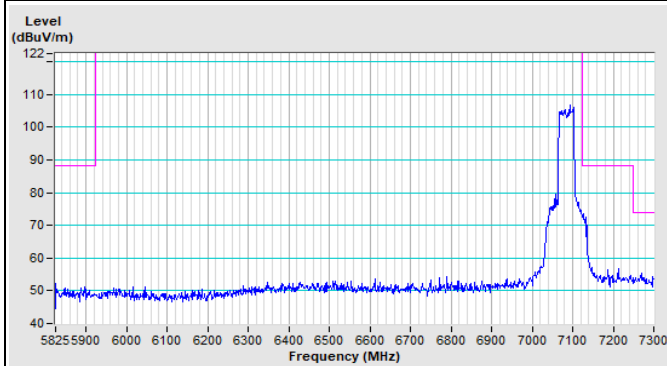


Vertical (Peak)

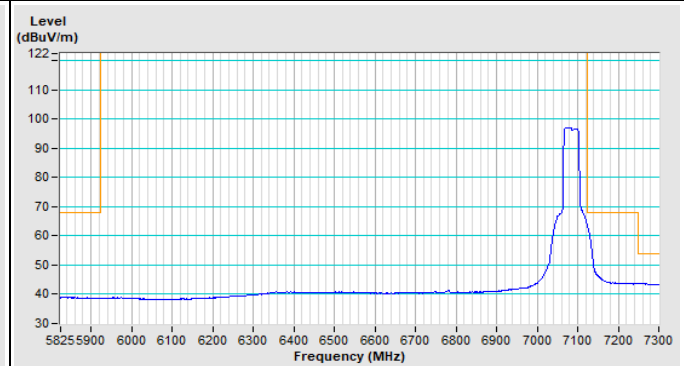


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

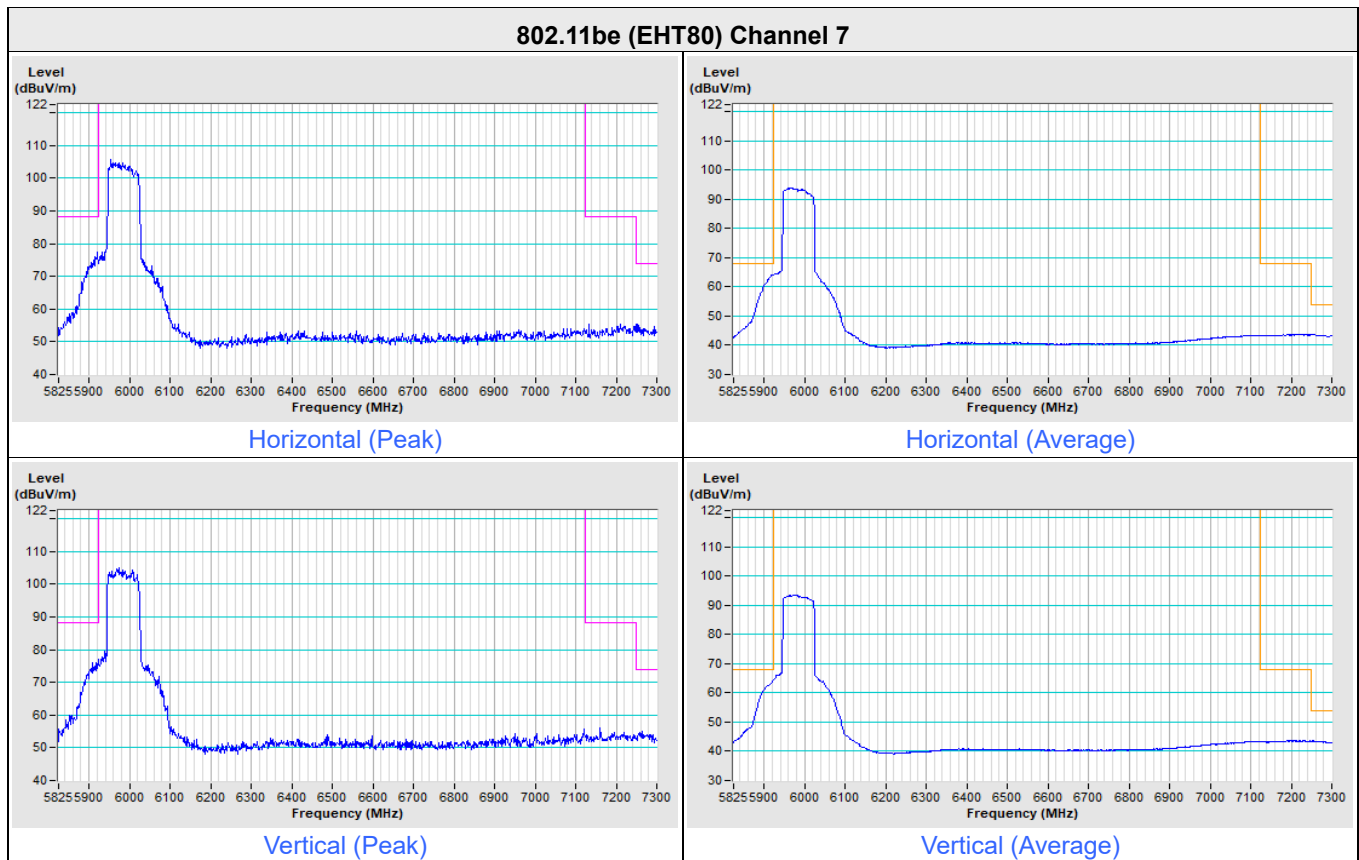


802.11be (EHT80) Channel 215

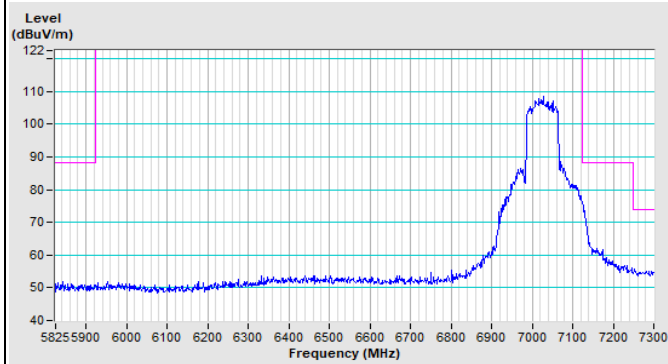


Horizontal (Peak)

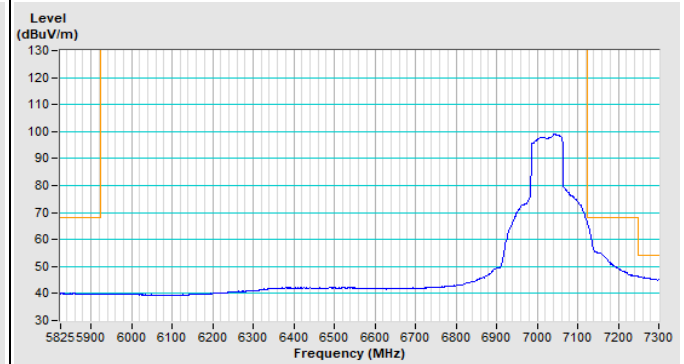

Horizontal (Average)

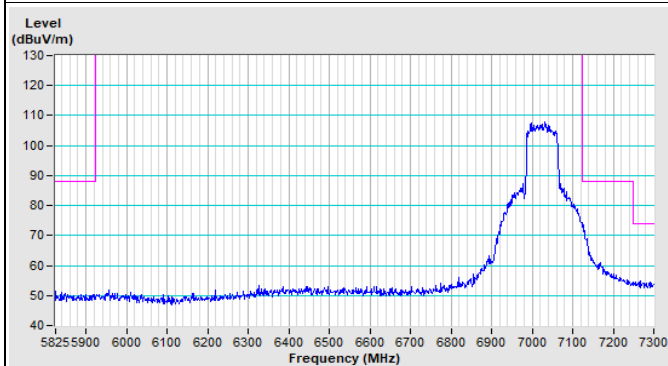


Vertical (Peak)

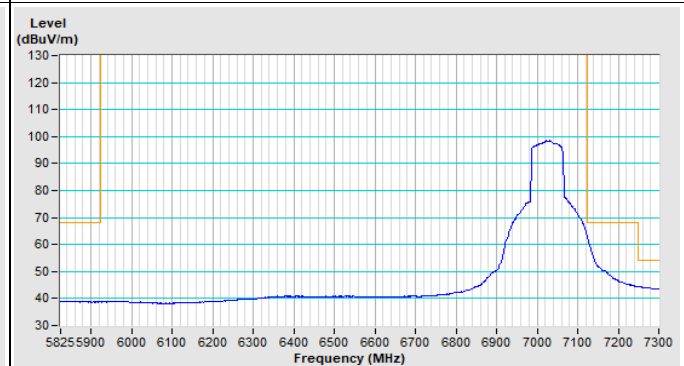


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

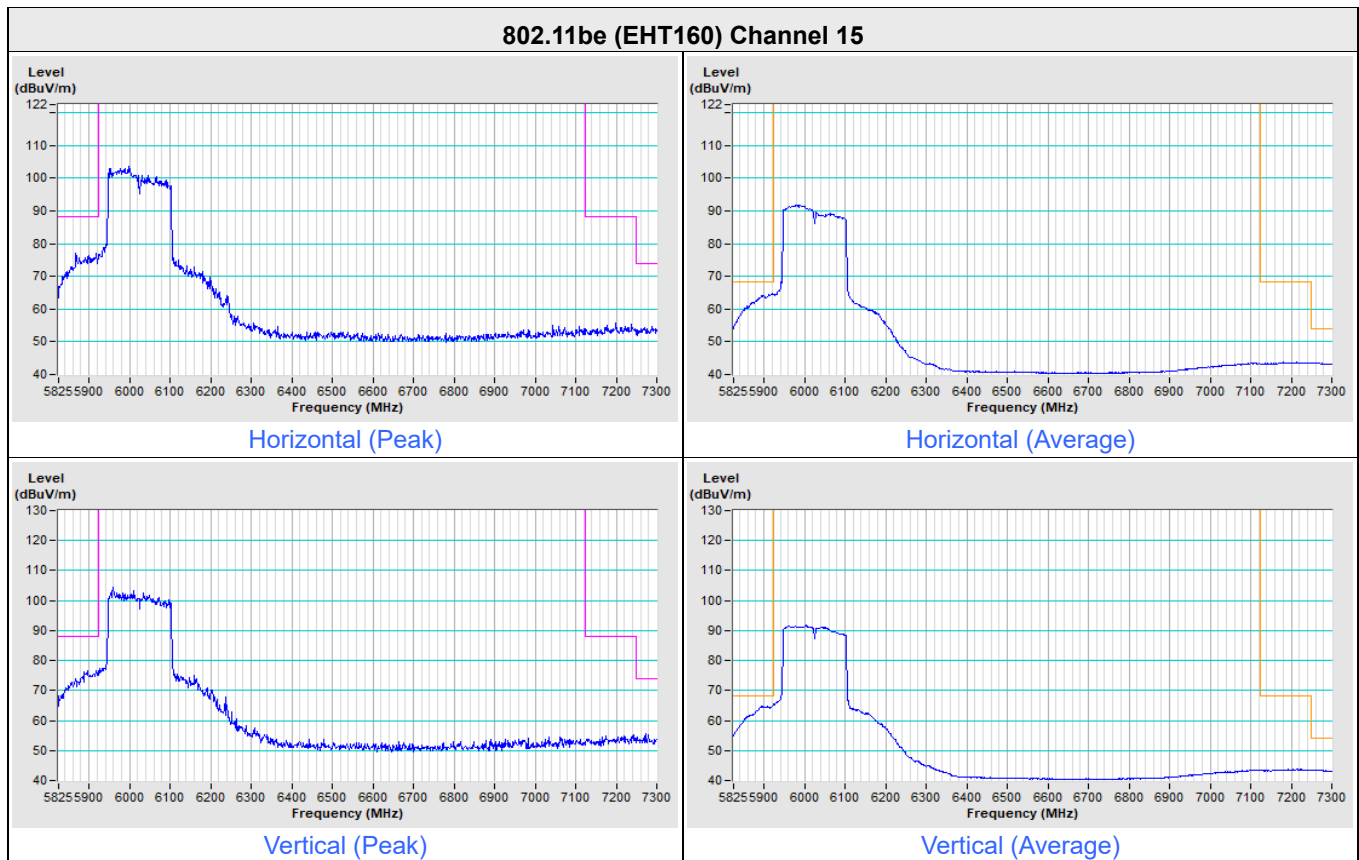


802.11be (EHT160) Channel 207

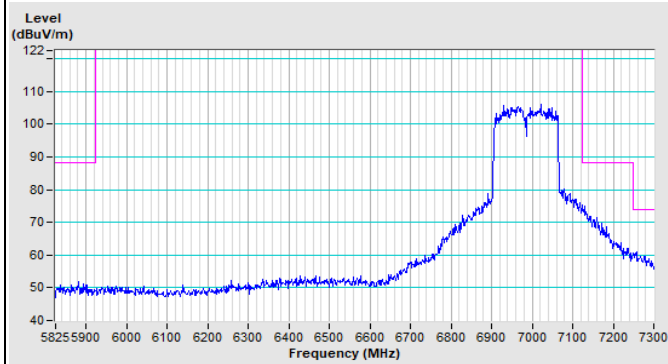


Horizontal (Peak)

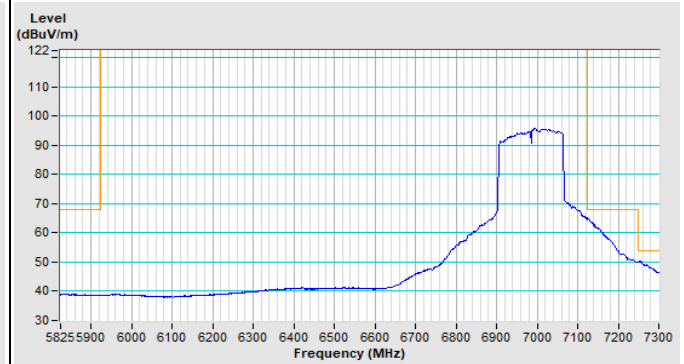

Horizontal (Average)

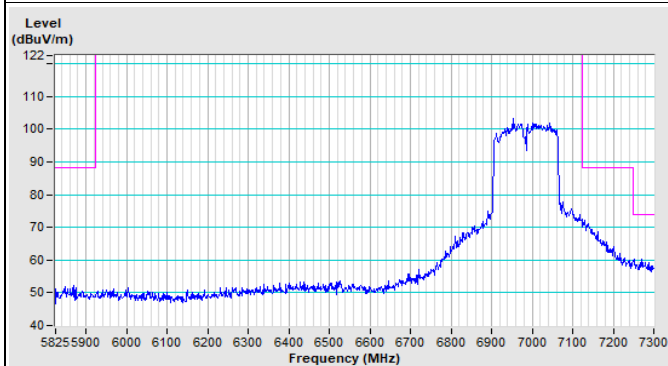


Vertical (Peak)

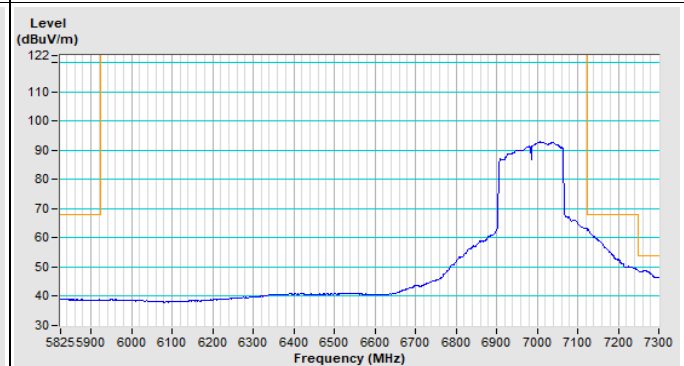


Vertical (Average)


1Tx NSS1 (RU, MRU)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

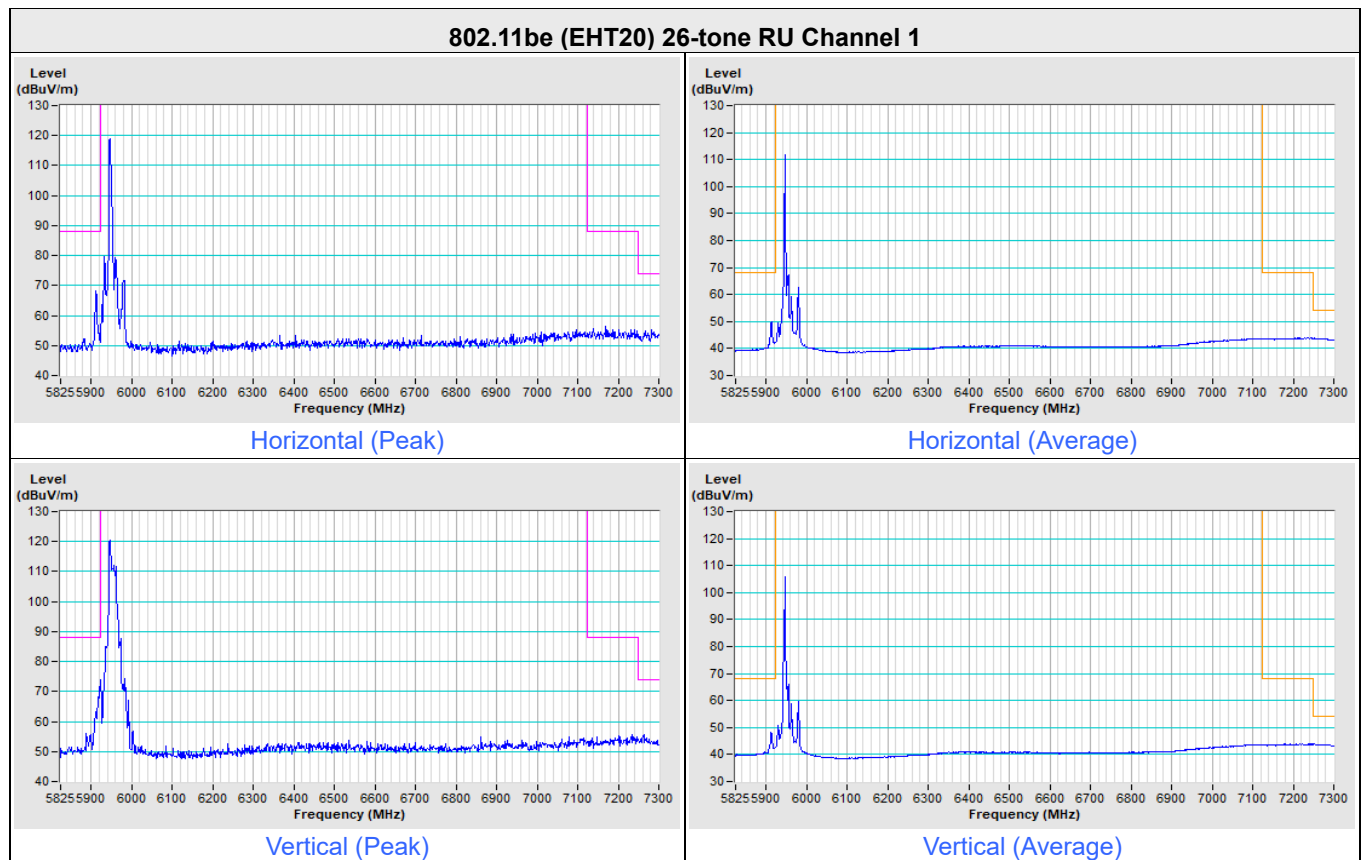

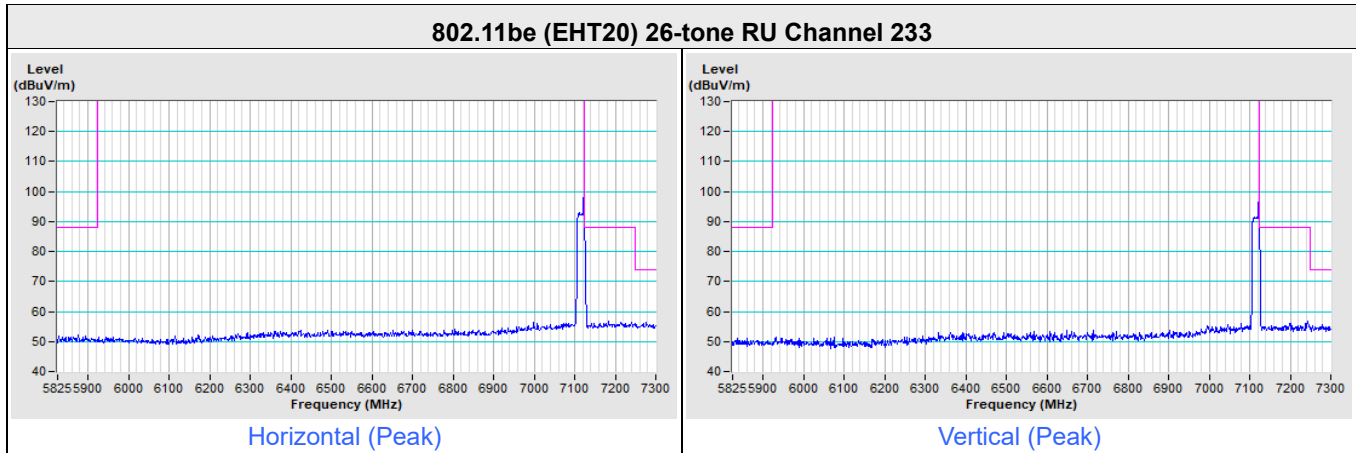



For Integration method:

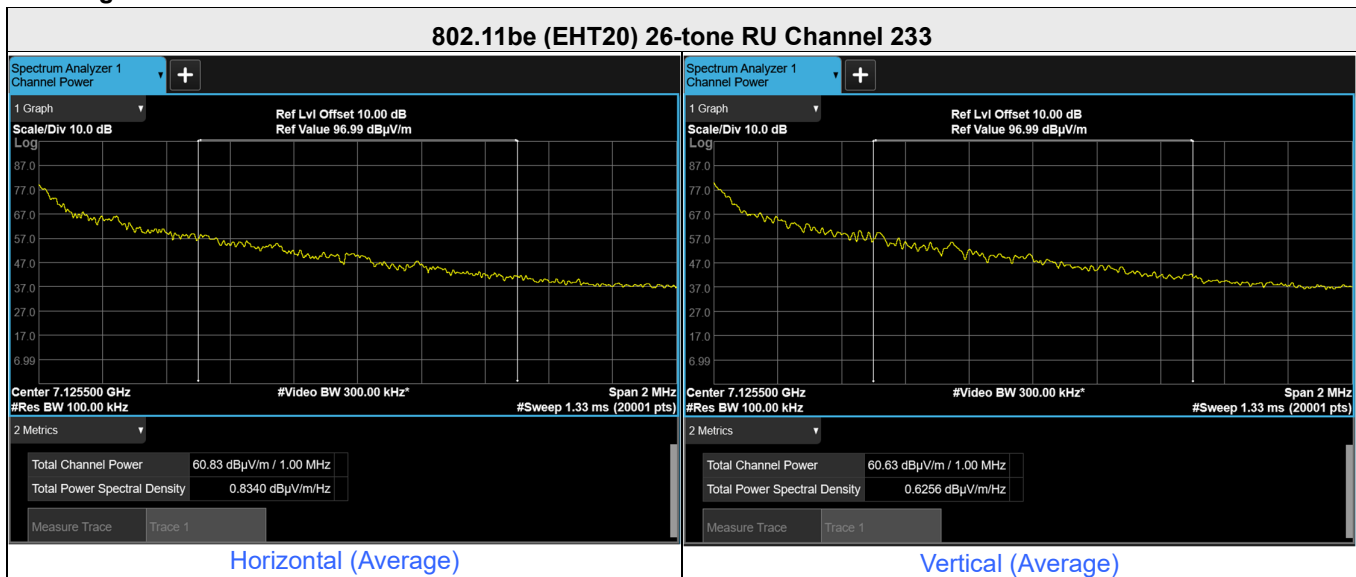

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

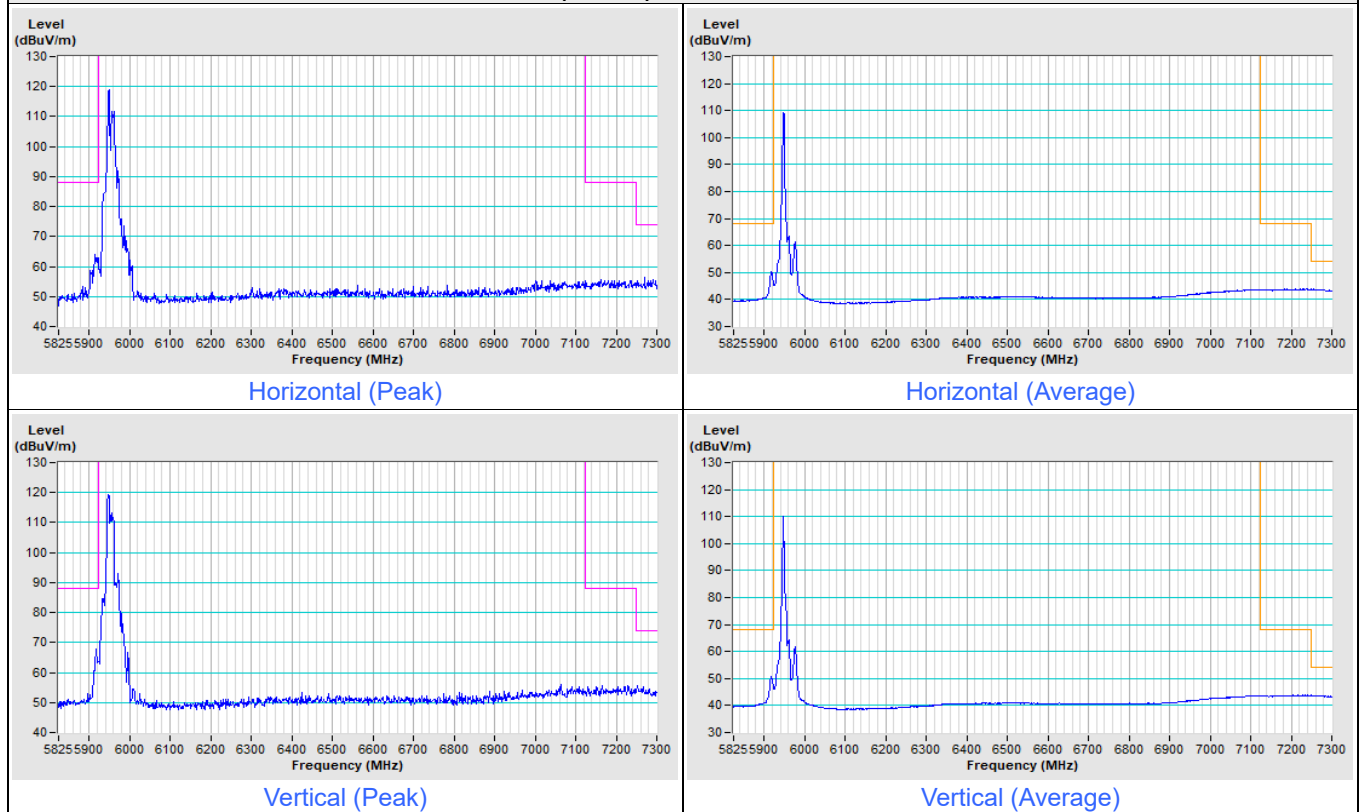

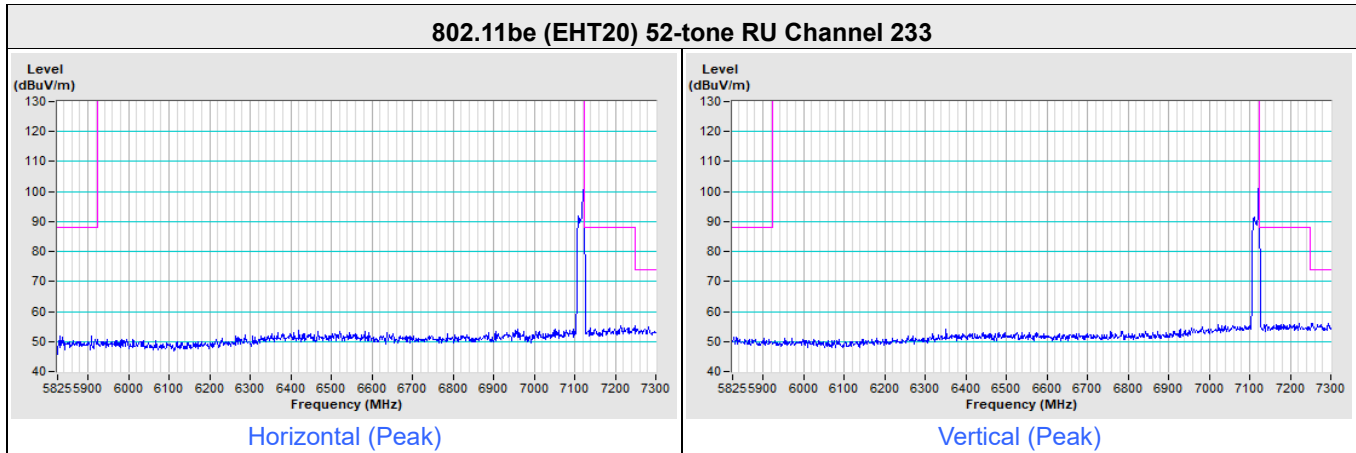

For Integration method:

